


CONSTRUCTION SKETCH

PROJECT Bethpage, NY GM-38 Area
 JOB NO. CTO 96
 DRILLING SUBCONTRACTOR _____
 DRILLER _____

DRILLING METHOD Reverse Rotary
 WELL NO. RW-3
 DATE OF WELL INSTALLATION _____
 GEOLOGIST _____
 TOP OF CASING ELEVATION _____

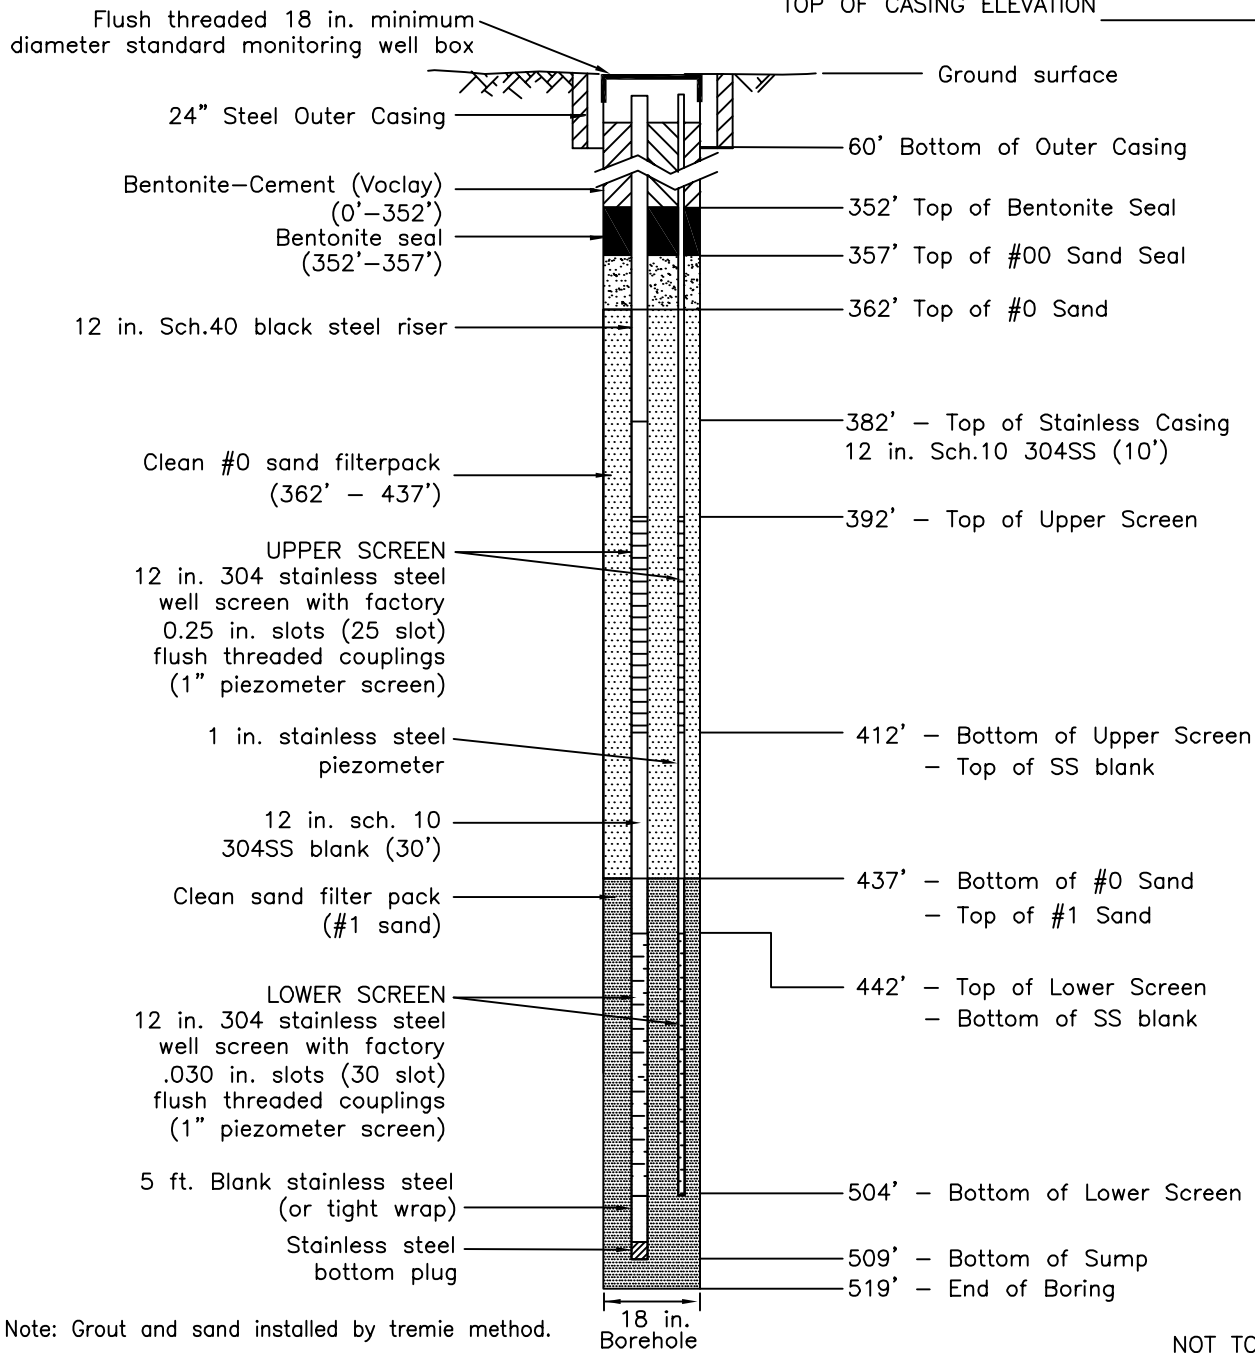

Note: Grout and sand installed by tremie method.

NOT TO SCALE

WELL ID	(A) SCREEN INTERVAL (FT. BGS)	(B) SCREEN MATERIAL	(C) CASING MATERIAL
RW-3 UPPER	392-412	SS FT-WIRE WRAPPED	WELDED CS/SS
RW-3 LOWER	442-504	SS FT-WIRE WRAPPED	WELDED CS/SS

SS = STAINLESS STEEL CS = CARBON STEEL (SCH 40) FT = FLUSH THREADED

U.S. Navy RAC
 Engineering Field Activity-Northeast
 NWIRP, Bethpage, NY
 GM-38 Area
 Groundwater Remediation Project
 Recovery Well No. 3
 Proposed Construction Diagram

TETRA TECH EC, INC.

P:\LantDiv\Bethpage_GM-38 Area\CAD - GIS\DWG\Well Logs 2009\22820962-RW3.dwg