

**2016 OU2 GROUNDWATER INVESTIGATION  
RE124D1, RE124D2 (VPB158)  
INSTALLATION REPORT**

**NAVAL WEAPONS INDUSTRIAL RESERVE PLANT (NWIRP)  
SITE 1 OU2  
BETHPAGE, NY**

Prepared for:



**Department of the Navy  
Naval Facilities Engineering Command, Atlantic  
9324 Virginia Avenue  
Building Z-144  
Norfolk, Virginia 23511**

June 2017

**2016 OU2 GROUNDWATER INVESTIGATION  
RE124D1, RE124D2 (VPB158)  
INSTALLATION REPORT**

**NWIRP BETHPAGE  
SITE 1 OU2  
BETHPAGE, NY**

Prepared for:



**Department of the Navy  
Naval Facilities Engineering Command, Atlantic  
9324 Virginia Avenue  
Building Z-144  
Norfolk, Virginia 23511**

Prepared by:



**Resolution Consultants  
*A Joint Venture of AECOM & EnSafe*  
1500 Wells Fargo Building  
440 Monticello Avenue  
Norfolk, Virginia 23510**

**Contract Number: N62470-11-D-8013  
CTO WE15**

**June 2017**

A handwritten signature in black ink that reads "Brian Caldwell".

---

**Brian Caldwell  
Contract Task Order Manager**

## Table of Contents

LIST OF ACRONYMS AND ABBREVIATIONS.....	III
1.0 PROJECT BACKGROUND .....	1
1.1 Scope and Objectives .....	1
1.2 Site History .....	1
1.3 Geology and Hydrogeology .....	2
2.0 FIELD PROGRAM.....	4
2.1 Drilling and Well Construction .....	4
2.2 Well Development .....	5
2.3 Sampling .....	5
2.4 Decontamination and Investigation Derived Waste (IDW) .....	5
2.5 Surveying .....	6
3.0 REFERENCES .....	8

### Tables

Table 1	Monitoring Well Construction Summary
Table 2	Monitoring Well Development Summary
Table 3	Analytical Data Summary
Table 4	Stabilized Field Parameters

### Figures

Figure 1	General Location Map
Figure 2	RE124D1 and RE124D2 Location Map

## Appendices

### Appendix A – RE124D1, RE124D2

Section 1 Boring Logs

Section 2 VPB158 Gamma and TCE/PCE Plot

Section 3 Monitoring Well Construction Logs

Section 4 Groundwater Sample Log Sheets

Section 5 Analytical Data Validation

Section 6 Survey

### Appendix B – Geologic Cross Sections derived from Environmental Sequence Stratigraphy (ESS)

---

## List of Acronyms and Abbreviations

AOC	Area of Concern
bgs	below ground surface
CSM	Conceptual Site Model
COR	Continuously Operating Reference
EPA	Environmental Protection Agency, United States
ESS	Environmental Sequence Stratigraphy
ft	feet
GOCO	Government-Owned Contractor-Operated
GPS	Global Positioning System
IDW	Investigation Derived Waste
IR	Installation Restoration
Katahdin	Katahdin Analytical Services
NAD	North American Datum
NAVD	North American Vertical Datum
NAVFAC	Naval Facilities Engineering Command
NG	Northrop Grumman
NTU	nephelometric turbidity units
NWIRP	Naval Weapons Industrial Reserve Plant
NYS	New York State
NYSDEC	New York State Department of Environmental Conservation
NYSDOH	New York State Department of Health
OU	Operable Unit
PCBs	Polychlorinated Biphenyls
POTW	Publicly Owned Treatment Works
PCE	Tetrachloroethene
PPE	Personal Protective Equipment
PVC	Polyvinylchloride
SAP	Sampling and Analysis Plan
SVOC	Semivolatile Organic Compounds
TCE	Trichloroethene
TCL	Target Compound List
TCLP	Toxicity Characteristic Leaching Procedure
TOC	Total Organic Carbon
UFP	United Federal Programs
US	United States
VOC	Volatile Organic Compounds
VPB	Vertical Profile Boring

---

## 1.0 PROJECT BACKGROUND

Resolution Consultants has prepared this Data Summary Report for the Naval Facilities Engineering Command (NAVFAC), Mid-Atlantic under contract task order WE15 Contract N62470-11-D-8013. This report describes the installation of two monitoring wells and one initial groundwater monitoring event (specifically at the Vertical Profile Boring [VPB] 158 location) in 2016 for the Naval Weapons Industrial Reserve Plant (NWIRP) Bethpage Operable Unit (OU) 2 Site 1 offsite plume. NWIRP Bethpage is located in east-central Nassau County, Long Island, New York, approximately 30 miles east of New York City (Figure 1).

### 1.1 Scope and Objectives

This report provides information on the installation of RE124D1 and RE124D2, monitoring wells associated with VPB158. The purpose of this investigation was to ascertain subsurface conditions and contaminant levels and the western extent of the offsite plume south of Hempstead Turnpike and west of Wantagh Avenue. The locations of RE124D1 and RE124D2, as well as other VPBs and monitoring well locations, are shown in Figure 2.

The field investigation included completing two monitoring wells, well development, soil/groundwater analysis, groundwater sampling, and surveying. Field tasks were conducted in 2016 in accordance with the *United Federal Programs Sampling and Analysis Plan (UFP SAP)*, Bethpage, New York (Resolution, 2013a). In addition, the work adhered to the following UFP SAP Addendums: *Groundwater Sampling Using Low Stress (Low Flow) Purging and Sampling Protocol* (Resolution Consultants, 2013b) and *Installation of Vertical Profile Borings and Monitoring Wells* (Resolution Consultants, 2013c).

Documentation of these activities is included in Appendix A of this report.

### 1.2 Site History

NWIRP Bethpage is in the Hamlet of Bethpage, Town of Oyster Bay, New York. Since its inception in 1941, the plant's primary mission was the research, prototyping, testing, design, engineering, fabrication, and primary assembly of military aircraft. The facilities at NWIRP included four plants used for assembly and prototype testing, a group of quality control laboratories, two warehouse complexes (north and south), a salvage storage area, water recharge basins, the Industrial Wastewater Treatment Plant, and several smaller support buildings.

The Navy's property originally totaled 109.5 acres and was formerly a Government-Owned Contractor-Operated (GOCO) facility that was operated by Northrop Grumman (NG) until September 1998. Prior to 2002, the NWIRP property was bordered on the north, west, and south by current or former NG facilities, and on the east by a residential neighborhood. By March 2008, approximately 100 acres of NWIRP property were transferred to Nassau County in three separate actions. The remaining 9 acres and access easements were retained by the Navy to continue remedial efforts at Installation Restoration (IR) Site 1 – Former Drum Marshalling Area and Site 4 – Former Underground Storage Tanks (Area of Concern [AOC] 22). A parcel of land connecting the two sites was also retained. Currently, the 9-acre parcel of NWIRP is bordered on the east by the residential neighborhood and on the north, south, and west by Steel Equities; however, a small portion is still owned by Nassau County. Access to the NWIRP is from South Oyster Bay Road.

### **1.3 Geology and Hydrogeology**

Overburden at the site consists of well over 1,000 feet (ft) of unconsolidated deposits overlying crystalline bedrock of the Hartland Formation. Overburden is divided into four geologic units: the upper Pleistocene deposits, the Magothy Formation, the clay member of the Raritan Formation ("Raritan Clay") and the Lloyd Sand member of the Raritan Formation ("Lloyd Sand") (Geraghty and Miller, 1994).

The upper Pleistocene ranges in thickness from approximately 50 to 100 ft and consists of till and outwash deposits of medium to coarse sand and gravel with lenses of fine sand, silt and clay (Smolensky and Feldman, 1988); these deposits form the Upper Glacial Aquifer. Directly underlying this unit is the Magothy Formation with a thickness of 650 to 900 ft and lower extent of 700 to 1,000 ft below ground surface (bgs), as observed at the former NWIRP and extending southeast to areas south of Southern State Parkway. Locally at the RE124 locations, the bottom of the Magothy (top of the Raritan Clay) is encountered at approximately 858 feet bgs. The Magothy is characterized by fine to medium sands and silts interbedded with zones of clays, silty sands and sandy clays. Sand and gravel lenses are found in some areas between depths of 600 and 880 ft bgs; these deposits form the main producing zones of the Magothy Aquifer.

Investigations performed by the Navy since 2012 indicate that the bottom of the Magothy (top of the Raritan Clay) can extend to depths of 700 to greater than 1,000 ft bgs. The top of the Raritan Clay deepens to the south-southeast, as evidenced by clay depths of 1,000 ft bgs (or more) in borings installed offsite. The Raritan Clay Unit is of continental origin and consists of clay, silty clay, clayey silt, and fine silty sand. This member acts as a confining layer over the Lloyd Sand Unit. The Lloyd Sand Unit is also of continental origin, having been deposited in a large fresh water lacustrine

---

environment. The material consists of fine to coarse-grained sands, gravel, inter-bedded clay, and silty sand. These deposits form the Lloyd Aquifer.

The Upper Glacial Aquifer and the Magothy Aquifer comprise the aquifers of interest at the NWIRP. Regionally, these formations are generally considered to form a common, interconnected aquifer as the coarse nature of each unit near their contact and the lack of any regionally confining clay unit allows for the unrestricted flow of groundwater between the formations.

The Magothy Aquifer is the major source of public water in Nassau County. The most productive water bearing zones are the discontinuous lenses of sand and gravel that occur within the siltier matrix. The major water-bearing zones are coarse sand and gravel lenses located in the lower portion of the Magothy. The Magothy Aquifer is commonly regarded to function overall as an unconfined aquifer at shallow depths and a confined aquifer at deeper depths. The drilling program at the NWIRP has revealed that clay zones beneath the facility are common but laterally discontinuous. No confining clay units of facility-wide extent have been encountered. This is also the case for borings installed offsite.

Groundwater is encountered at a depth of approximately 50 ft bgs at the facility. Historically, because of pumping and recharge at the facility, groundwater depths have been measured to range from 40 to 60 ft bgs. The groundwater flow in the area is to the south-southeast.

Resolution Consultants reviewed the geologic data and regional literature and developed four representative base-wide cross sections to support development of a Conceptual Site Model (CSM). A description of the application of Environmental Sequence Stratigraphy (ESS) and the results are provided in Appendix B.



---

## 2.0 FIELD PROGRAM

Two monitoring wells were installed in the vicinity of VPB158 between July 2016 and September 2016. Field investigation activities consisted of drilling, well installation, well development, sampling, soil/groundwater analysis, and surveying. Drilling during this investigation was performed by Delta Well and Pump Company of Ronkonkoma, New York. A description of these tasks is provided below.

### 2.1 Drilling and Well Construction

Monitoring wells RE124D1 and RE124D2 were installed using mud rotary drilling techniques (Figure 2). Depths of monitoring wells RE124D1 and RE124D2 were 685 ft and 755 ft respectively. Well construction details are summarized in Table 1. Boring logs with lithologic descriptions of the well screen interval are included in Appendix A. *2016 OU2 Groundwater Investigation VPB158* (Resolution Consultants, 2015) documents the installation of VPB158 including detailed lithologic descriptions, continuous gamma plot and multiple Volatile Organic Compounds (VOC) sample results over the entire boring length. After discussion with New York State Department of Environmental Conservation (NYSDEC) and New York State Department of Health (NYSDOH), the RE124 well cluster was located approximately 400 feet upgradient of VPB158. This provided a more advantageous location for drilling space, and is located slightly closer to the RE108 hotspot. The gamma and trichloroethene (TCE) tetrachloroethene (PCE) plot for VPB158 along with the well screen intervals at RE124D1 and RE124D2 is included in Appendix A.

Prior to installing each monitoring well, screen intervals were determined based on intervals with the highest VOC concentrations as measured in the VPB158 hydropunch samples and coincident intervals with the highest apparent permeability based on the VPB158 gamma logs and geologist logs. During the monitoring well installation, split spoon samples were collected every 5 ft in the screen interval. One soil sample per monitoring well was analyzed for Total Organic Carbon (TOC) via United States (US) Environmental Protection Agency (EPA) series SW-846 method 9060A by Katahdin Analytical Services (Katahdin). Data validation of TOC data was performed by Resolution Consultants. Data validation packages and analytical data tables are included in Appendix A.

Wells were constructed of 4-inch diameter, Schedule 80, National Sanitation Foundation-approved polyvinylchloride (PVC) riser pipe and .010-slot well screen. Wells were completed at the surface with a 12-inch diameter steel curb box. Well risers were set below grade and fit with lockable J plugs. Detailed monitoring well construction diagrams are included in Appendix A.

## 2.2 Well Development

Following installation, all monitoring wells were developed to evacuate silts and other fine-grained materials and to establish the filter pack to promote a hydraulic connection between the well and the surrounding aquifer. Well development was not initiated until at least 24 hours after well installation.

Monitoring well screens were developed using a combination of air lifting, manual surging, and pumping with a submersible pump. Turbidity was monitored during development to determine stabilization. In compliance with New York State Department of Environmental Conservation NYSDEC policy, wells were developed until turbidity was less than 50 nephelometric turbidity units (NTUs) if possible. Table 2 summarizes total pumped volume from air and pump development and final turbidity. Well development logs are included in Appendix A.

## 2.3 Sampling

Following development, wells were allowed to stabilize for at least 2 weeks prior to groundwater sampling in accordance with low flow sampling procedures. Wells were purged using a bladder pump with a drop tube intake placed at the approximate midpoint of the screened interval. The following water quality parameters were continuously measured: water temperature, pH, conductivity, oxidation-reduction potential, dissolved oxygen and turbidity. Groundwater analytical samples were collected when water quality parameters stabilized. Samples were analyzed for VOCs via method 8260C and 1,4-dioxane via Method 8270D SIM by Katahdin. All development and purge water was managed as investigation derived waste (IDW). Groundwater sample logs and data validation packages are included in Appendix A.

Monitoring wells RE124D1 and RE124D2 were sampled by Resolution Consultants on October 18, 2016. Analytical results and stabilized field parameters for these monitoring wells are summarized in Table 3 and 4, respectively. Data validation is documented in Appendix A. These monitoring wells will be included in quarterly sampling as part of the Navy's ongoing Environmental Restoration Program.

## 2.4 Decontamination and Investigation Derived Waste

Resolution Consultants utilized dedicated and disposable sampling equipment when possible to avoid the potential for cross-contamination of samples. The sampling equipment included dedicated plastic scoops, disposable polyethylene tubing, disposable gloves, and laboratory supplied sample bottles. Hand held equipment and split spoons were decontaminated using Luminol and water

wash, a potable water rinse, followed by a distilled water rinse. Water was collected in 5-gallon pails or 55-gallon drums. Non dedicated sampling equipment was decontaminated as outlined in the UFP SAP Addendum - *Groundwater Sampling Using Low Stress (Low Flow) Purging and Sampling Protocol* (Resolution Consultants, 2013b).

As part of the IDW management practices and in accordance with the SAP, the investigation waste (consisting of soil cuttings, drilling muds, IDW fluids, and personal protective equipment [PPE]) generated during the groundwater monitoring well installation and sampling was containerized and staged at NWIRP Bethpage.

IDW solids were containerized in roll offs. Representative samples from each roll off were submitted to Katahdin for analysis of:

- Target Compound List (TCL) VOCs
- TCL Semi-volatile Organic Compounds (SVOCs)
- Toxicity Characteristic Leaching Procedure (TCLP) Metals
- Polychlorinated Biphenyls (PCBs)
- Total petroleum hydrocarbons
- Corrosivity
- Ignitability
- Reactive Cyanide
- Reactive Sulfide
- Paint Filter

IDW fluid generated during well development and purging was containerized in frac tanks and stored at NWIRP Bethpage for characterization and ultimate disposal to the Publicly Owned Treatment Works (POTW), in accordance with the facilities existing discharge permit. A representative water sample was collected from each frac tank and submitted to Katahdin for analysis of VOCs via Method SW 624, pH via Method SW 9040B, PCBs via Method 8082 and Total Metals via Method SW 846. All analytical criteria were met for disposal of water.

## 2.5 Surveying

A survey of the monitoring well locations was conducted at the end of fieldwork by C. T. Male, Inc., of Latham, NY, under the direct supervision of Resolution Consultants. The locations were tied into

the existing base map developed for this investigation. The survey elevation is referenced to the North American Vertical Datum (NAVD) 1988 and has a vertical accuracy of 0.01 foot. Vertical control is based on observations of the Continuously Operating Reference (COR) Stations Queens and Central Islip. The horizontal location is referenced to the North American Datum (NAD) 1983 (2011) NY. Long Island Zone 3104 and has an accuracy of 0.1 foot. Local horizontal and vertical control is based on Global Positioning System (GPS) observations using the NYSNet Real Time Network.

A table of survey data (latitude/longitude, northing/easting, elevations of ground, rim and PVC) and a survey map is included in Appendix A.

### 3.0 REFERENCES

Geraghty and Miller, Inc., 1994. *Remedial Investigation Report, Grumman Aerospace Corporation, Bethpage, New York*. Revised September 1994.

Resolution Consultants, 2013a. *United Federal Programs Sampling and Analysis Plan, Site OU-2 Offsite Trichloroethene (TCE) Groundwater Plume Investigation, Bethpage, New York*. April 2013.

Resolution Consultants, 2013b. UFP SAP Addendum, *Groundwater Sampling Using Low Stress (Low Flow) Purging and Sampling Protocol*. November 2013.

Resolution Consultants, 2013c. UFP SAP Addendum, *Installation of Vertical Profile Borings and Monitoring Wells*. December 2013.

Resolution Consultants, 2015. *2016 OU2 Groundwater Investigation VPB158, Bethpage, NY*. June 2015.

Smolensky, D., and Feldman, S., 1988. *Geohydrology of the Bethpage-Hicksville-Levittown Area, Long Island, New York, U.S. Geological Survey Water-Resourced Investigations Report 88-4135*, 25 pp.

## Tables

**TABLE 1**  
**MONITORING WELL CONSTRUCTION SUMMARY**  
2016 OU2 GROUNDWATER INVESTIGATION  
NWIRP BETHPAGE, NY

MONITORING WELL	WELL COMPLETION DATE	GROUND ELEVATION (MSL)	PVC ELEVATION (INNER CASING) (MSL)	WELL DEPTH (ft bgs)	SURFACE CASING DEPTH (ft bgs)	SCREEN INTERVAL (ft bgs)	SUMP DEPTH INTERVAL (ft bgs)	BORING DEPTH (ft bgs)
RE124D1	9/8/2016	78.77	78.26	685	52	660-680	680-685	698
RE124D2	8/19/2016	78.42	77.79	755	52	730-750	750-755	768

MSL - mean sea level

ft bgs - feet below ground surface

**TABLE 2**  
**MONITORING WELL DEVELOPMENT SUMMARY**  
2016 OU2 GROUNDWATER INVESTIGATION  
NWIRP BETHPAGE, NY

MONITORING WELL	AIR DEVELOPMENT		PUMP DEVELOPMENT			APPROX. TOTAL DEVELOPMENT VOLUME (GAL)	FINAL TURBIDITY (NTUs)
	DATE	APPROX. VOLUME (GAL)	DATE	FINAL PUMP DEPTH (FT BGS)	APPROX. VOLUME (GAL)		
RE124D1	9/14/2016	3,000	9/19/2016	660-680	5,700	8,700	41.2
RE124D2	9/15/2016	4,000	9/16/2016	730-750	4,500	8,500	22.64

GAL - gallon

FT BGS - feet below ground surface

NTUs - Nephelometric Turbidity Units



**TABLE 3**  
**ANALYTICAL DATA SUMMARY**  
2016 OU2 GROUNDWATER INVESTIGATION  
NWIRP BETHPAGE, NY

Location	NYSDEC	RE124D1	RE124D2
Sample Date	Groundwater Guidance or Standard Value (Note 1)	10/18/2016	10/18/2016
Sample ID		RE124D1-GW- 101816	RE124D2-GW- 101816
Sample type code		Groundwater	Groundwater
VOC 8260C (ug/L)			
1,1,1-TRICHLOROETHANE	5	<0.50 U	<0.50 U
1,1,2,2-TETRACHLOROETHANE	5	<0.50 U	<0.50 U
1,1,2-TRICHLORO-1,2,2-TRIFLUOROETHANE	5	<b>33</b>	<0.50 U
1,1,2-TRICHLOROETHANE	1	<0.50 U	<0.50 U
1,1-DICHLOROETHANE	5	<0.50 U	<0.50 U
1,1-DICHLOROETHENE	5	<0.50 U	<0.50 U
1,2,4-TRICHLOROENZENE	5	<0.50 U	<0.50 U
1,2-DIBROMO-3-CHLOROPROPANE	0.04	<b>&lt;0.75 U</b>	<b>&lt;0.75 U</b>
1,2-DIBROMOETHANE	NL	<0.50 U	<0.50 U
1,2-DICHLOROBENZENE	3	<0.50 U	<0.50 U
1,2-DICHLOROETHANE	5	<0.50 U	<0.50 U
1,2-DICHLOROETHENE, TOTAL	5	<b>0.29 J</b>	<1.0 U
1,2-DICHLOROPROPANE	1	<0.50 U	<0.50 U
1,3-DICHLOROBENZENE	3	<0.50 U	<0.50 U
1,4-DICHLOROBENZENE	3	<0.50 U	<0.50 U
1,4-DIOXANE (Method 8270D_SIM)	NL	<b>2.5</b>	<0.17 U
2-BUTANONE	50	<2.5 UJ	<2.5 U
2-HEXANONE	50	<2.5 U	<2.5 U
4-METHYL-2-PENTANONE	NL	<2.5 U	<2.5 U
ACETONE	50	<b>3.3 J</b>	<b>2.4 J</b>
BENZENE	1	<0.50 U	<0.50 U
BROMODICHLOROMETHANE	50	<0.50 U	<0.50 U
BROMOFORM	50	<0.50 U	<0.50 U
BROMOMETHANE	5	<1.0 U	<1.0 U
CARBON DISULFIDE	60	<0.50 UJ	<0.50 UJ
CARBON TETRACHLORIDE	5	<0.50 U	<0.50 U
CHLOROBENZENE	5	<0.50 U	<0.50 U
CHLOROETHANE	5	<1.0 UJ	<1.0 U
CHLOROFORM	7	<0.50 U	<0.50 U
CHLOROMETHANE	5	<1.0 UJ	<1.0 U
CIS-1,2-DICHLOROETHENE	5	<b>0.29 J</b>	<0.50 U
CIS-1,3-DICHLOROPROPENE	0.4	<b>&lt;0.50 U</b>	<b>&lt;0.50 U</b>
CYCLOHEXANE	NL	<0.50 U	<0.50 U
DIBROMOCHLOROMETHANE	5	<0.50 U	<0.50 U
DICHLORODIFLUOROMETHANE	5	<1.0 UJ	<1.0 U
ETHYLBENZENE	5	<0.50 U	<0.50 U
ISOPROPYLBENZENE	5	<0.50 U	<0.50 U
M- AND P-XYLENE	NL	<1.0 U	<1.0 U
METHYL ACETATE	NL	<0.75 U	<0.75 U
METHYL CYCLOHEXANE	NL	<0.50 U	<0.50 U
METHYL TERT-BUTYL ETHER	10	<0.50 U	<0.50 U
METHYLENE CHLORIDE	5	<2.5 U	<2.5 U
O-XYLENE	NL	<0.50 U	<0.50 U
STYRENE	5	<0.50 U	<0.50 U
TETRACHLOROETHENE	5	<0.50 U	<0.50 U
TOLUENE	5	<0.50 U	<0.50 U
TRANS-1,2-DICHLOROETHENE	5	<0.50 U	<0.50 U
TRANS-1,3-DICHLOROPROPENE	0.4	<b>&lt;0.50 U</b>	<b>&lt;0.50 U</b>
TRICHLOROETHENE	5	<b>1.7</b>	<0.50 U
TRICHLOROFUOROMETHANE	5	<1.0 U	<1.0 U
VINYL CHLORIDE	2	<1.0 U	<1.0 U
XYLENES, TOTAL	5	<1.5 U	<1.5 U

**TABLE 3**  
**ANALYTICAL DATA SUMMARY**  
2016 OU2 GROUNDWATER INVESTIGATION  
NWIRP BETHPAGE, NY

**Notes:**

1 New York State Department of Environmental Conservation Division of Water Technical and Operation Guidance series  
(6 NYCRR 700-706, Part 703.5 summarized in TOGS 1.1.1)

Ambient water quality standards and groundwater effluent limitations, class GA; NL = Not Listed

**Bold** = Detected; ***Bold and Italics*** = Not detected exceeds NYS Groundwater Standards or guidance value

Yellow highlighted values exceed Groundwater Standards or guidance value

Sample type codes: N - normal environmental sample, FD - field duplicate

U = Nondetected result. The analyte was analyzed for, but was not detected above the reported sample quantitation limit.

UJ = The analyte was not detected above the reported sample quantitation limit. However, the reported quantitation limit is approximate and may or may not represent the actual limit of quantitation necessary to accurately and precisely measure the analyte.

J = The analyte was positively identified; the associated numerical value is the approximate concentration of the analyte in the sample.

M = the matrix spike or matrix spike duplicate did not meet recovery or precision requirements.

RE124D1, RE124D2  
(VPB158) Installation Report  
NWIRP Bethpage, NY

**TABLE 4**  
**STABILIZED FIELD PARAMETERS**  
2016 OU2 GROUNDWATER INVESTIGATION  
NWIRP BETHPAGE, NY

June 2017

Well	Date	Temperature (°C)	pH	Specific Conductance (µS/cm)	DO (mg/L)	ORP (mV)	Turbidity (NTU)	Depth to water (ft bgs)	Flow rate (ml/min)
RE124D1	10/18/2016	17.41	3.01	0.058	3.54	84.1	58.4	36.75	550
RE124D2	10/18/2016	15.71	5.80	0.046	4.41	108.7	68.9	37.5	600

°C - degrees Celsius

µS/cm - Microsiemens per Centimeter

mg/L - milligrams per liter



mV - Millivolts

NTU - Nephelometric Turbidity Unit

ft bgs - feet below ground surface




ml/min - milliliters per minute

## Figures

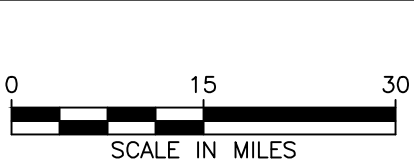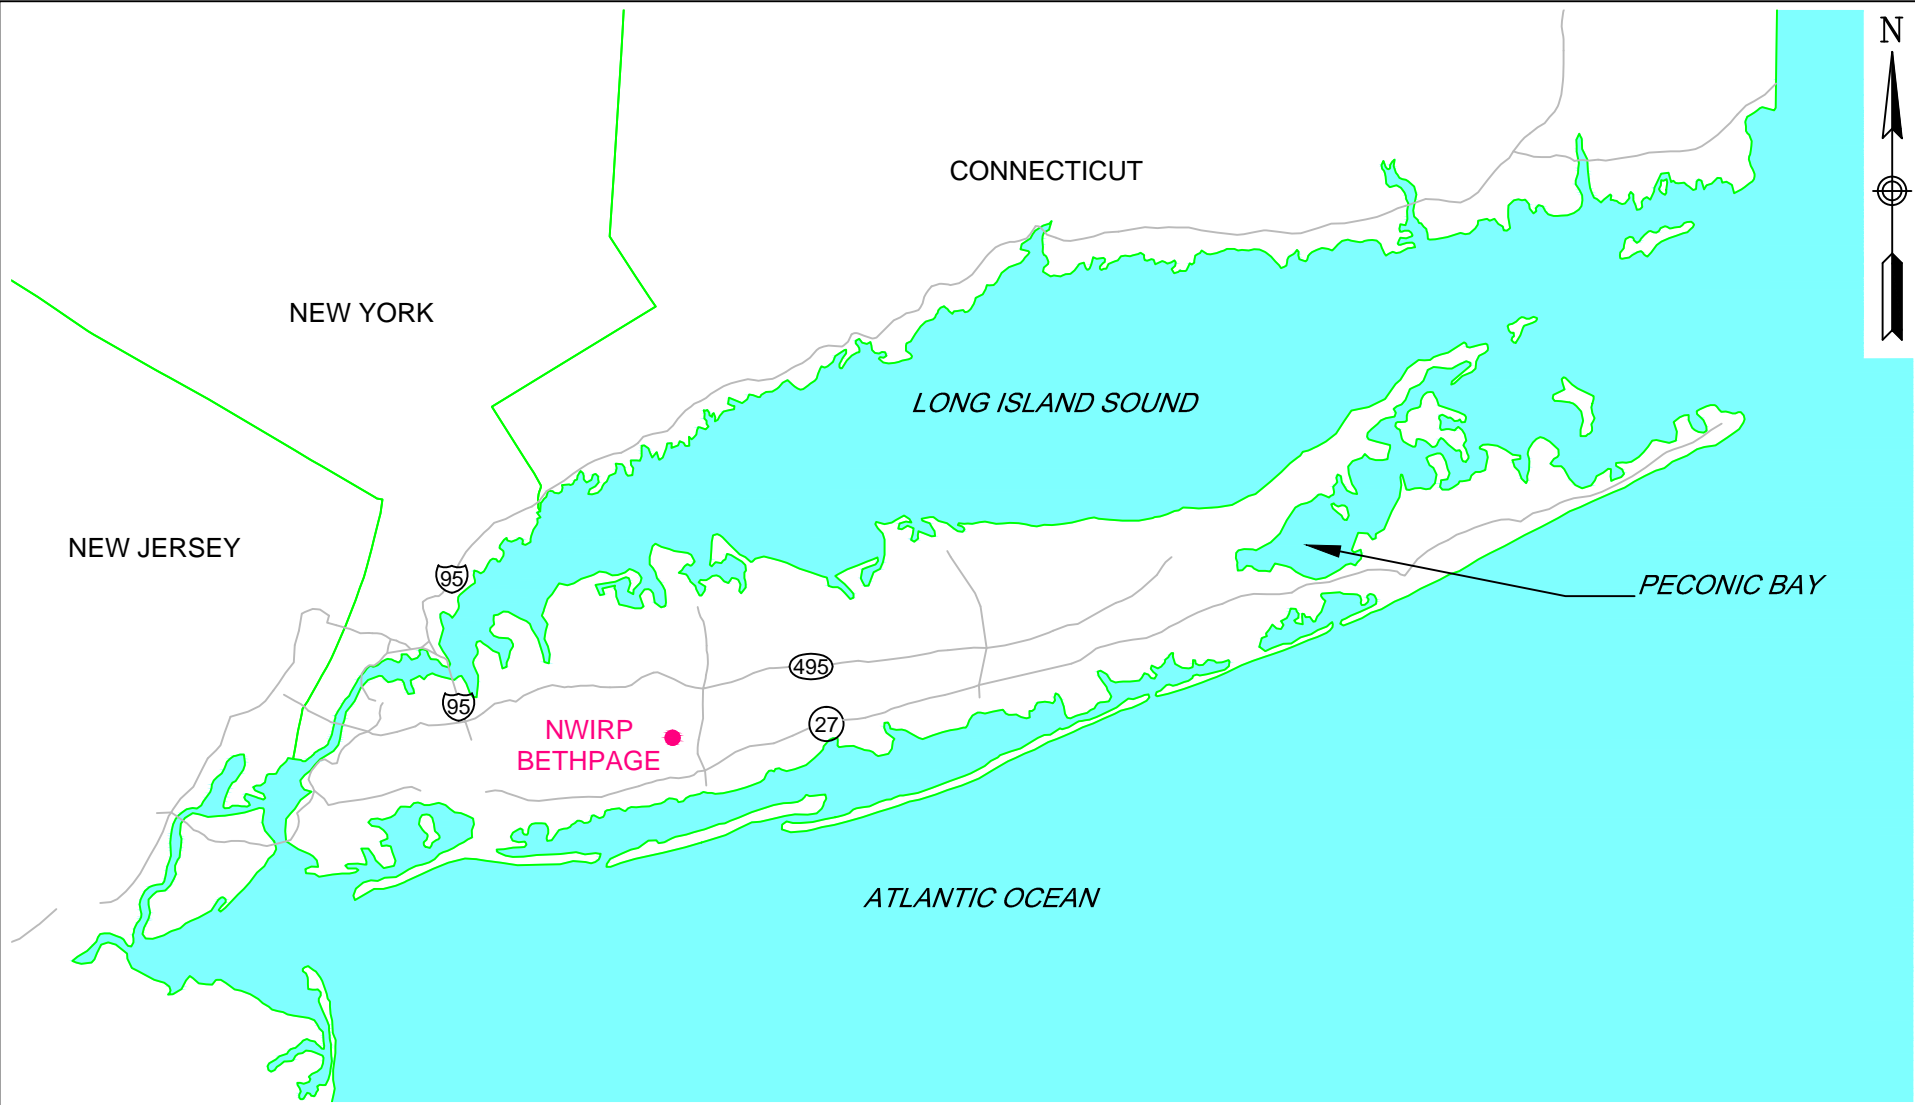

GENERAL LOCATION MAP  
NWIRP BETHPAGE  
BETHPAGE, NEW YORK

CONTRACT NUMBER N62470-11-D-8013		CTO NUMBER WE15	
APPROVED BY ---		DATE ---	
APPROVED BY ---		DATE ---	
FIGURE NO. 1			REV 0

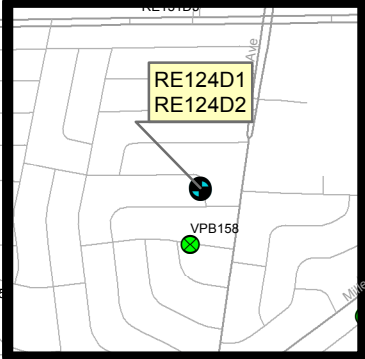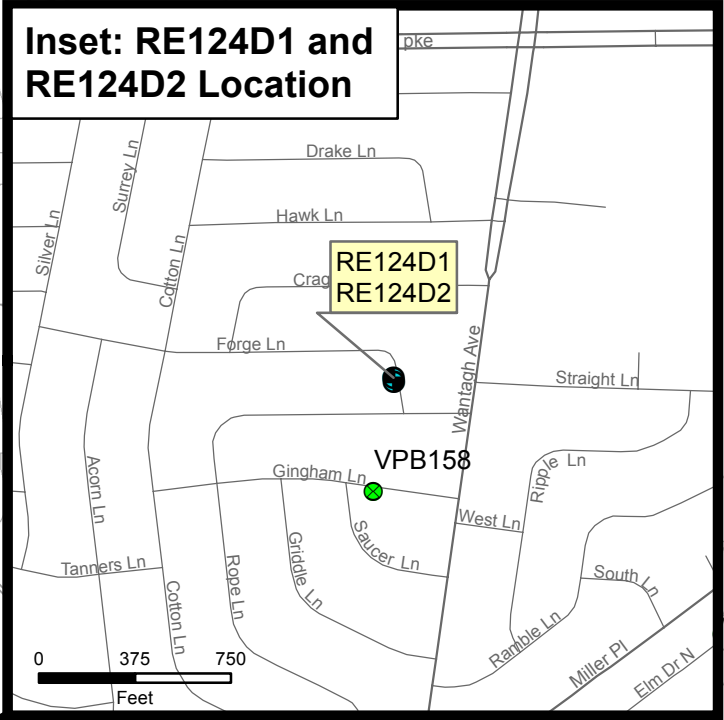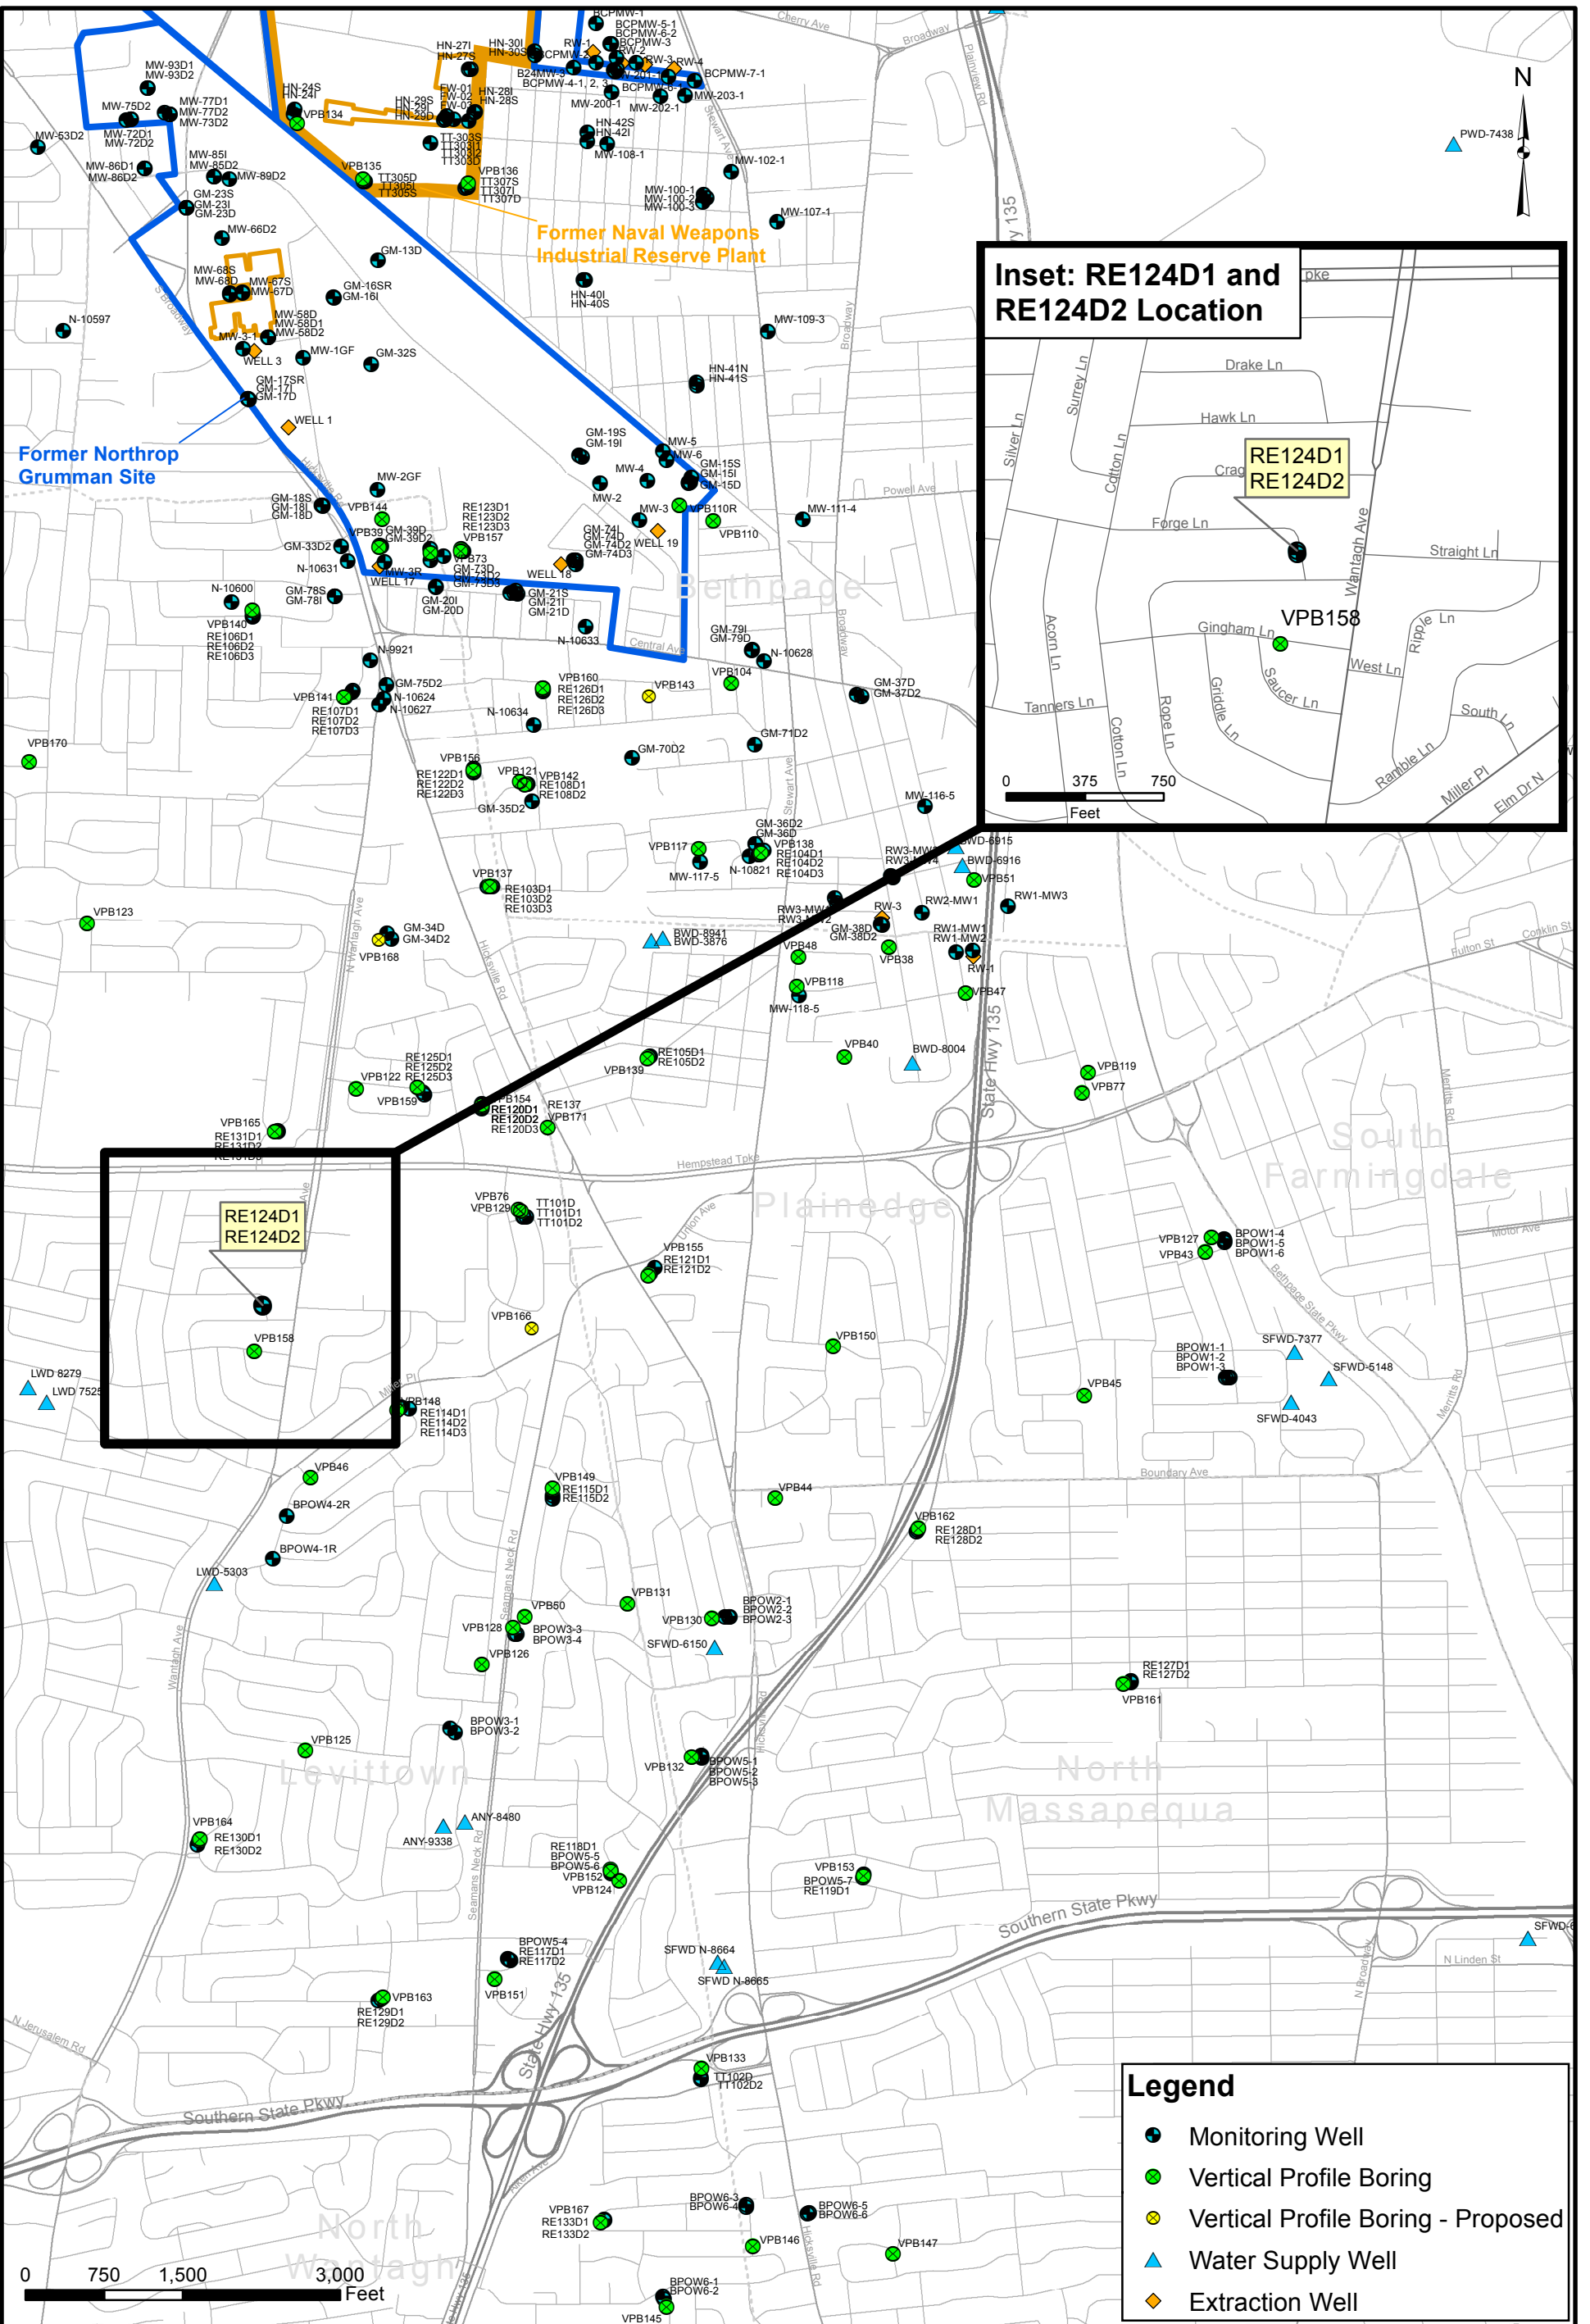

Legend	
	Monitoring Well
	Vertical Profile Boring
	Vertical Profile Boring - Proposed
	Water Supply Well
	Extraction Well



RE124D1 AND RE124D2 LOCATION MAP  
 NAVAL WEAPONS INDUSTRIAL RESERVE PLANT  
 BETHPAGE, NEW YORK

CONTRACT NUMBER N62470-11-D8013	CTO NUMBER WE15
APPROVED BY PS	DATE 3/22/2017
APPROVED BY	DATE
FIGURE NO. 2	REV 0

## **Appendices**

## **Appendix A**

### **RE124D1, RE124D2**



**Section 1**

**Boring Logs**

<b>Client:</b> Department of the Navy, Naval Facilities Engineering Command, Mid-Atlantic			<b>Logged By:</b> P. Kareth		
<b>Location:</b> Gingham & Saucer Ln., T.O. Hempstead, NY			<b>Drilling Company:</b> Delta Well & Pump		
<b>Project #:</b> 60266526		<b>Ground Elevation (msl):</b> 78.77		<b>Well Screen Interval (ft):</b> 660-680	
<b>Start Date:</b> 8/25/2016*		<b>Drilling Method:</b> Auger (0-50' bgs) Mud Rotary (>50' bgs)		<b>Water Level (ft):</b>	
<b>Finish Date:</b> 9/8/2016		<b>Northing:</b> 202702.46 <b>Easting:</b> 1122969.80		<b>Total Depth (ft):</b> 698.0	

\* Casing installed with Auger rig 7/25/16 - 7/26/16.

DEPTH (ft)	PID (ppm)	Formation	USCS	GRAPHIC LOG	MATERIAL DESCRIPTION	Well Completion	Well Construction
0					0-663 ft; See VPB158 for Descriptions		
50							10" Diameter Steel Casing
100							
150							
200							
250							Bentonite Grout
300							
350							
400							
450							
500							
550							4" Diameter Schedule 80 PVC Riser
600							

<b>Client:</b> Department of the Navy, Naval Facilities Engineering Command, Mid-Atlantic		<b>Logged By:</b> P. Kareth
<b>Location:</b> Gingham & Saucer Ln., T.O. Hempstead, NY		<b>Drilling Company:</b> Delta Well & Pump
<b>Project #:</b> 60266526	<b>Ground Elevation (msl):</b> 78.77	<b>Well Screen Interval (ft):</b> 660-680
<b>Start Date:</b> 8/25/2016	<b>Drilling Method:</b> Auger (0-50' bgs) Mud Rotary (>50' bgs)	<b>Water Level (ft):</b>
<b>Finish Date:</b> 9/8/2016	<b>Northing:</b> 202702.46 <b>Easting:</b> 1122969.80	<b>Total Depth (ft):</b> 698.0

DEPTH (ft)	PID (ppm)	Formation	USCS	GRAPHIC LOG	MATERIAL DESCRIPTION	Well Completion	Well Construction
600					0-663 ft; See VPB158 for Descriptions ( <i>continued</i> )		4" Diameter Schedule 80 PVC Riser ( <i>continued</i> )
602							
604							
606							
608							
610							
612							
614							
616							
618							
620							
622							
624							
626							
628							
630							
632							
634							
636							
638							
640							
642							
644							
646							
648							
650							
652							
654							
656							
658							
660							
662							
664	NA		SP-SM		Gray (N7) m-f SAND, some Silt, trace clay, yellow mottles (10YR 5/4)		
666							
668	NA				No Recovery; fine gravel in the wash, pieces of broken quartz in the spoon, pushed a rock, hard drilling		
670							
672							
674	NA		GM		Gray (N7) c-f GRAVEL, some Sand, some silt		4" Diameter Schedule 80 PVC, 10 Slot Well Screen (660-680 ft bgs)
676							
678	NA		SP-SM		Gray (N7) m-f SAND, some c-f Gravel, some silt, 0.3' clay leayer near bottom of spoon, 0.3' c gravel layer		
680							
682			SP-SM		Gray (N7) m-f SAND, some f Gravel, trace silt		Sump
684							
686							
688			SP-SM		Gray (N7) m-f SAND, some f Gravel, trace silt		
690							
692							
694			SP-SM		Gray (N7) m-f SAND, trace silt		#1 Sand to Bottom
696							
698					End of boring at 698.0 ft. bgs.		

<b>Client:</b> Department of the Navy, Naval Facilities Engineering Command, Mid-Atlantic			<b>Logged By:</b> V. Thayer		
<b>Location:</b> Gingham & Saucer Ln., T.O. Hempstead, NY			<b>Drilling Company:</b> Delta Well & Pump		
<b>Project #:</b> 60266526		<b>Ground Elevation (msl):</b> 78.42		<b>Well Screen Interval (ft):</b> 730-750	
<b>Start Date:</b> 8/9/2016 *		<b>Drilling Method:</b> Auger (0-50' bgs) Mud Rotary (>50' bgs)		<b>Water Level (ft):</b>	
<b>Finish Date:</b> 8/19/2016		<b>Northing:</b> 202685.97	<b>Easting:</b> 1122972.34	<b>Total Depth (ft):</b> 768.0	

\* Casing installed with Auger rig 7/27/16 - 7/28/16.

DEPTH (ft)	PID (ppm)	Formation	USCS	GRAPHIC LOG	MATERIAL DESCRIPTION	Well Completion	Well Construction
0					0-733 ft; See VPB158 for Descriptions		
50							10" Diameter Steel Casing
100							
150							
200							Bentonite Grout
250							
300							
350							
400							
450							
500							
550							4" Diameter Schedule 80 PVC Riser
600							
650							
700							


<b>Client:</b> Department of the Navy, Naval Facilities Engineering Command, Mid-Atlantic		<b>Logged By:</b> V. Thayer
<b>Location:</b> Gingham & Saucer Ln., T.O. Hempstead, NY		<b>Drilling Company:</b> Delta Well & Pump
<b>Project #:</b> 60266526	<b>Ground Elevation (msl):</b> 78.42	<b>Well Screen Interval (ft):</b> 730-750
<b>Start Date:</b> 8/9/2016	<b>Drilling Method:</b> Auger (0-50' bgs) Mud Rotary (>50' bgs)	<b>Water Level (ft):</b>
<b>Finish Date:</b> 8/19/2016	<b>Northing:</b> 202685.97 <b>Easting:</b> 1122972.34	<b>Total Depth (ft):</b> 768.0

DEPTH (ft)	PID (ppm)	Formation	USCS	GRAPHIC LOG	MATERIAL DESCRIPTION	Well Completion	Well Construction
700					0-733 ft; See VPB158 for Descriptions (continued)		4" Diameter Schedule 80 PVC Riser (continued)
702							
704							
706							
708							
710							
712							
714							
716							
718							
720							#00 Filter Sand
722							
724							
726							#1 Filter Sand
728							
730							
732							
734			SP-SM		Gray (10YR 6/1) poorly graded SAND with Silt, subangular medium sand, little fine sand, few silt; several bands of lignite, orange staining, one (half inch) chunk of lignite		
736							
738	0		SP-SM		Pale brown (10YR 6/3) SAND with Silt interbedded with lignite seams, orange staining		
740			SP		Light gray (10YR 7/2) poorly graded SAND, one lignite seam		4" Diameter Schedule 80 PVC, 10 Slot Well Screen (730-750 ft bgs)
742							
744	0		SP		Light gray (10YR 7/2) poorly graded SAND, medium sand		
746			SM		Light gray (10YR 7/2) Silty SAND, one thin (quarter inch) layer of orange staining		
748							
750	0		SM		Gray (10YR 6/1) Silty SAND, fine sand, little silt; one 3" layer of friable lignite		
752			ML		Gray (10YR 6/1) Clayey SILT, little fine sand, laminated		Sump
754							
756							
758							
760							
762							#1 Sand to Bottom
764							
766							
768					End of boring at 768.0 ft. bgs.		

## Section 2

### VPB158 Gamma and TCE/PCE Plot

**Vertical Profile Boring VPB-158  
Downward Run - March 4, 2015  
Validated Analytical Data**

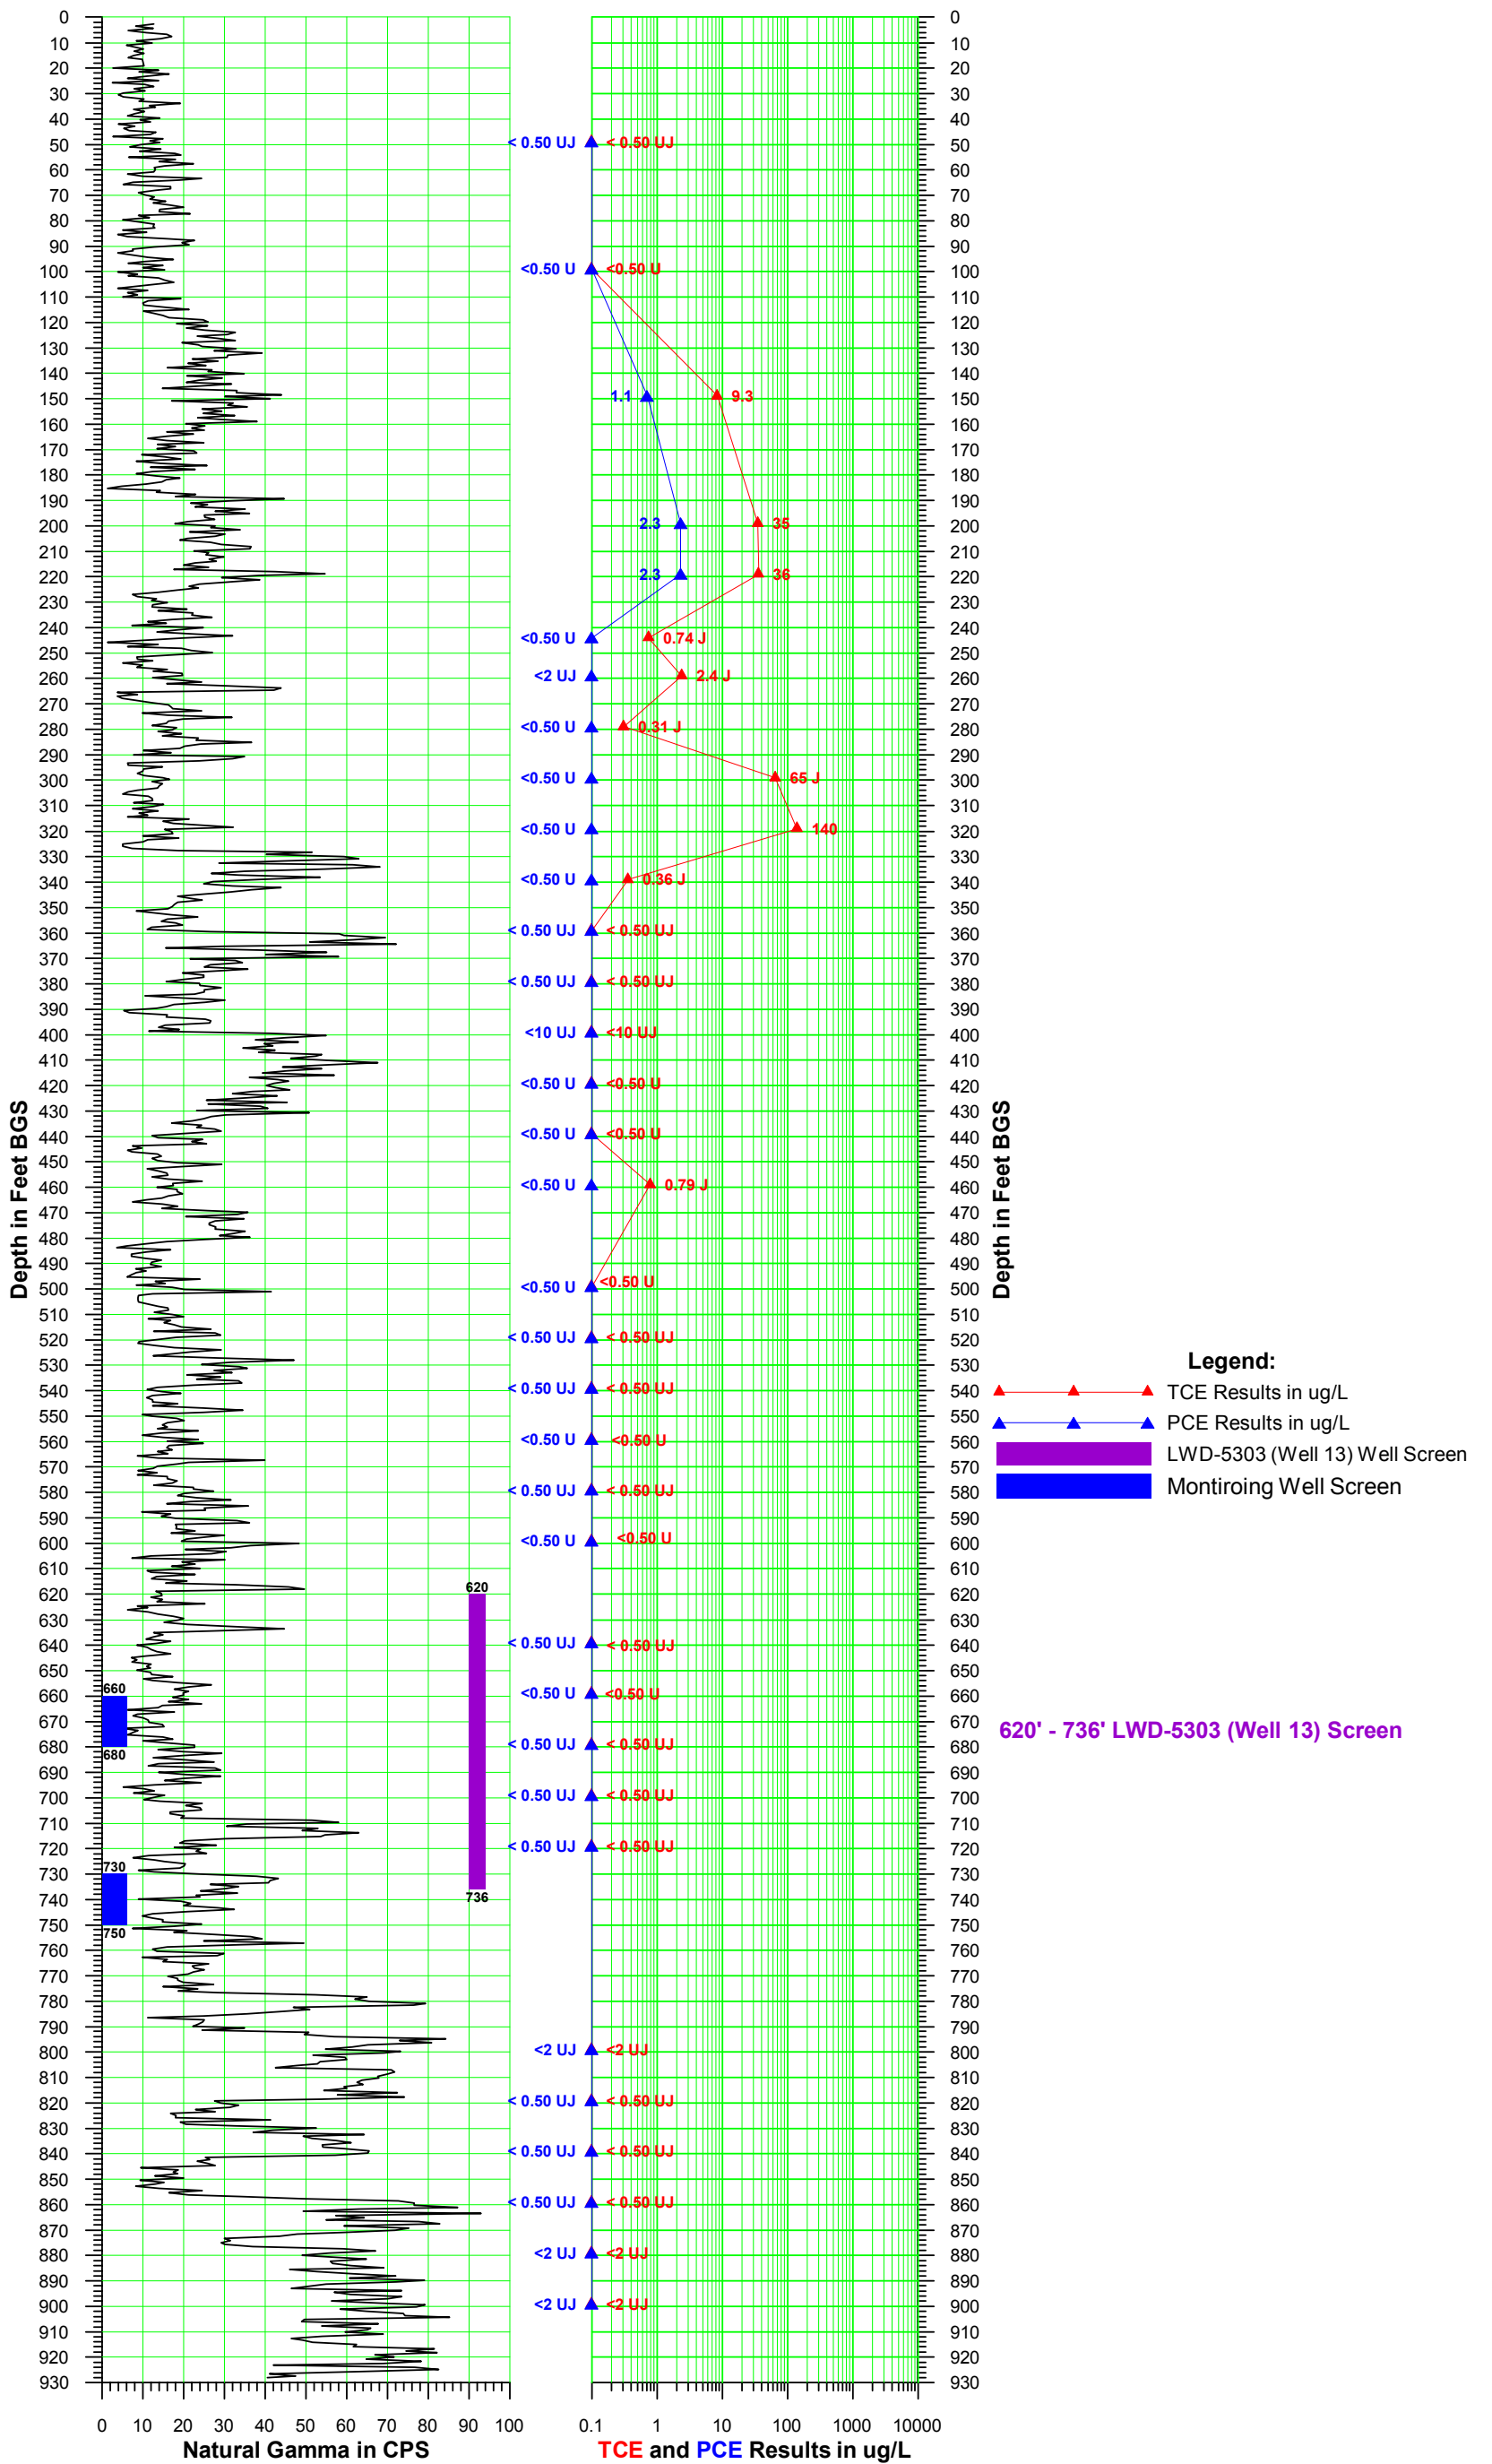

## **Section 3**


### **Monitoring Well Construction Logs**





Client: NAVFAC	Project Number: 60266526	<b>WELL ID: RE124D1</b>
Site Location: NWIRP BETHPAGE, NY		
Well Location: Gingham & Saucer Ln., T.O Hempstead, NY		Date Installed: 8/25-9/8/2016*
Method: MUD ROTARY		Inspector: V. Thayer
Coords: Northing: 202702.46 Easting: 1122969.80		Contractor: DELTA WELL & PUMP

### MONITORING WELL CONSTRUCTION DETAIL

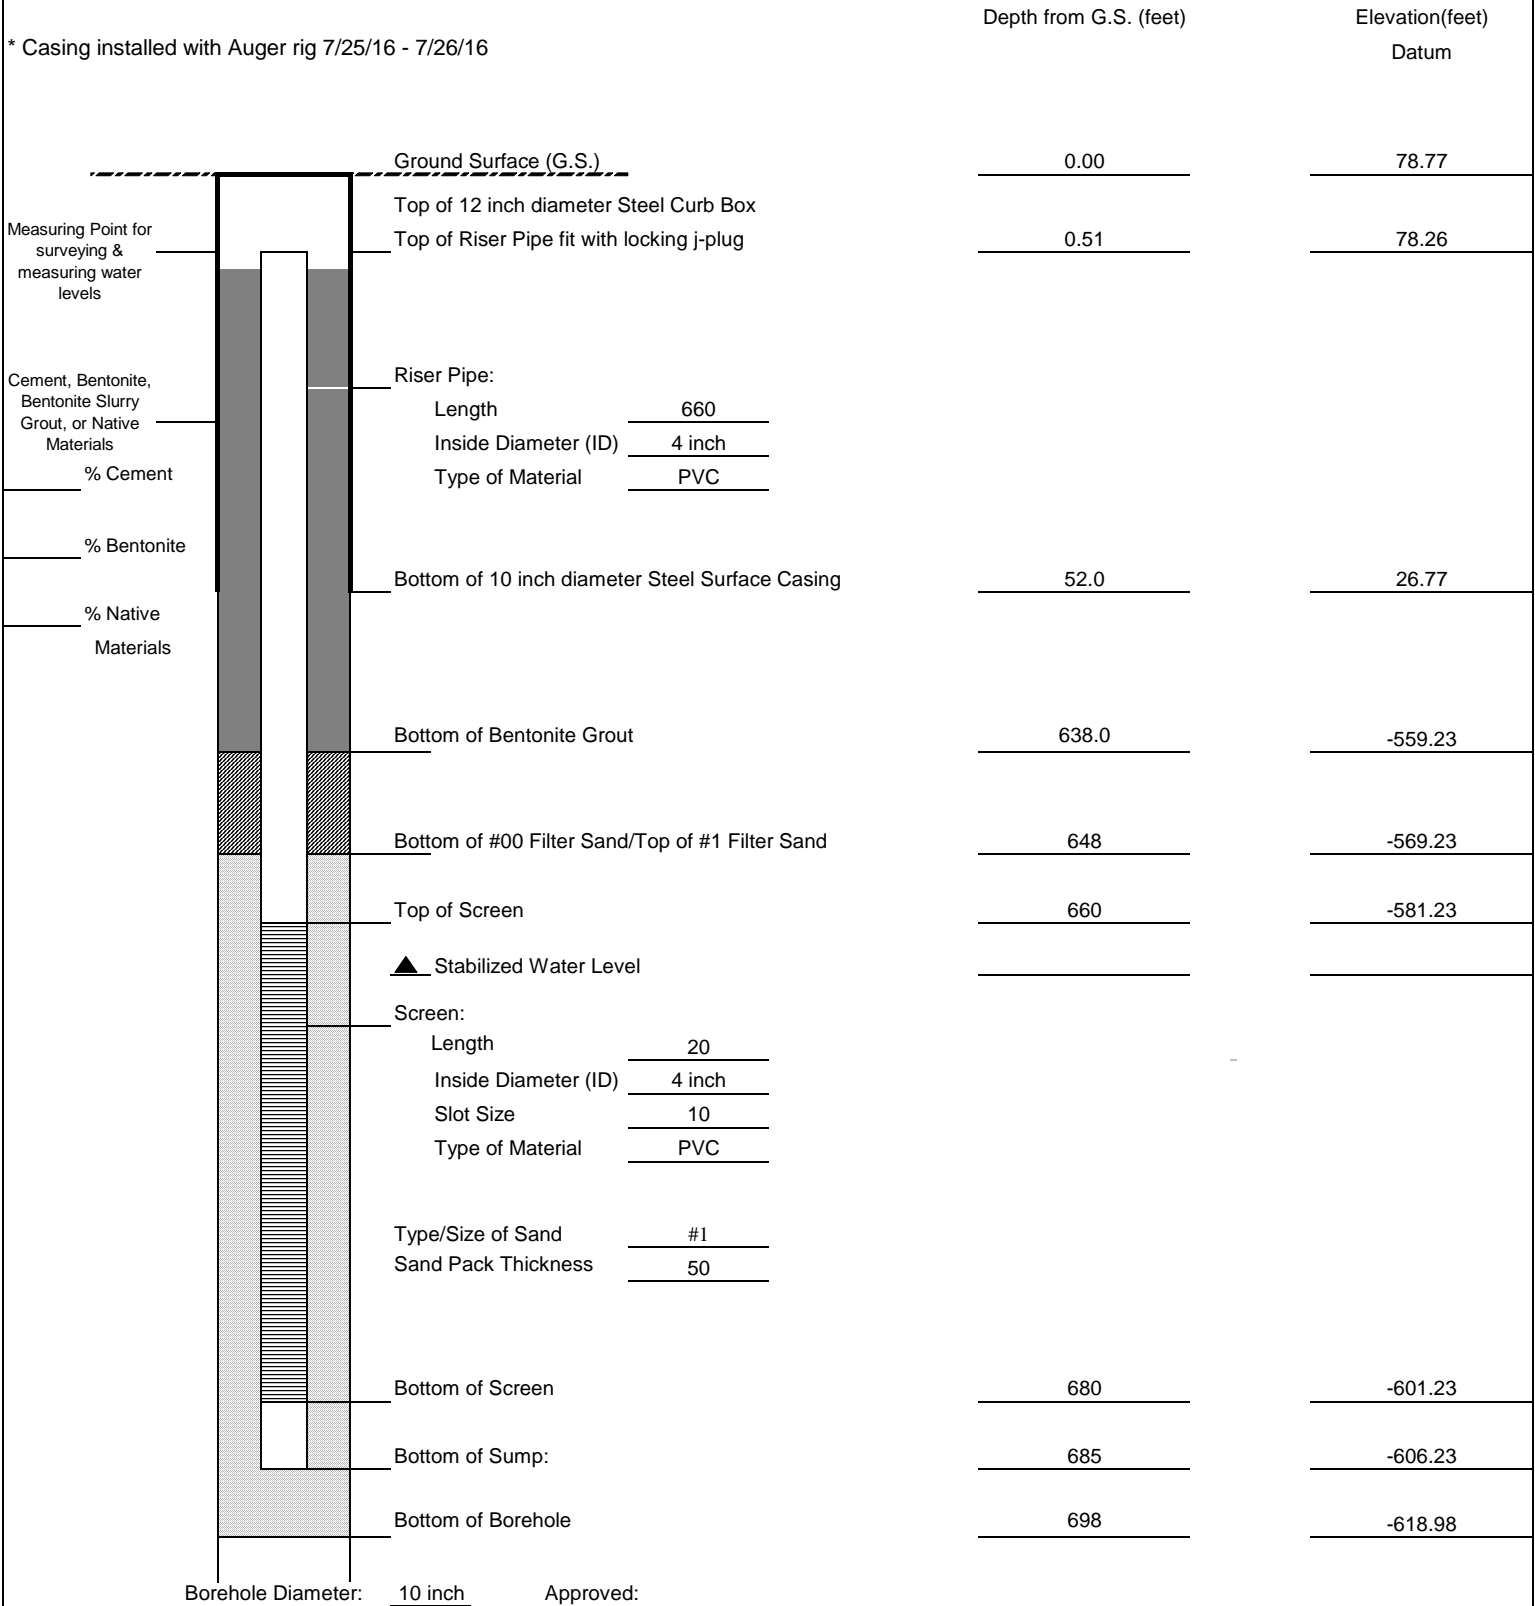


Describe Measuring Point: \_\_\_\_\_ Signature: Valerie Thayer Date: 9/8/2016

Ground Surface \_\_\_\_\_



Client: NAVFAC	Project Number: 60266526	<b>WELL ID: RE124D2</b>
Site Location: NWIRP BETHPAGE, NY		
Well Location: Gingham & Saucer Ln., T.O Hempstead, NY		Date Installed: 8/9/2016-8/19/2016
Method: MUD ROTARY		Inspector: V. Thayer
Coords: Northing: 202685.97 Easting: 1122972.34		Contractor: DELTA WELL & PUMP

### MONITORING WELL CONSTRUCTION DETAIL

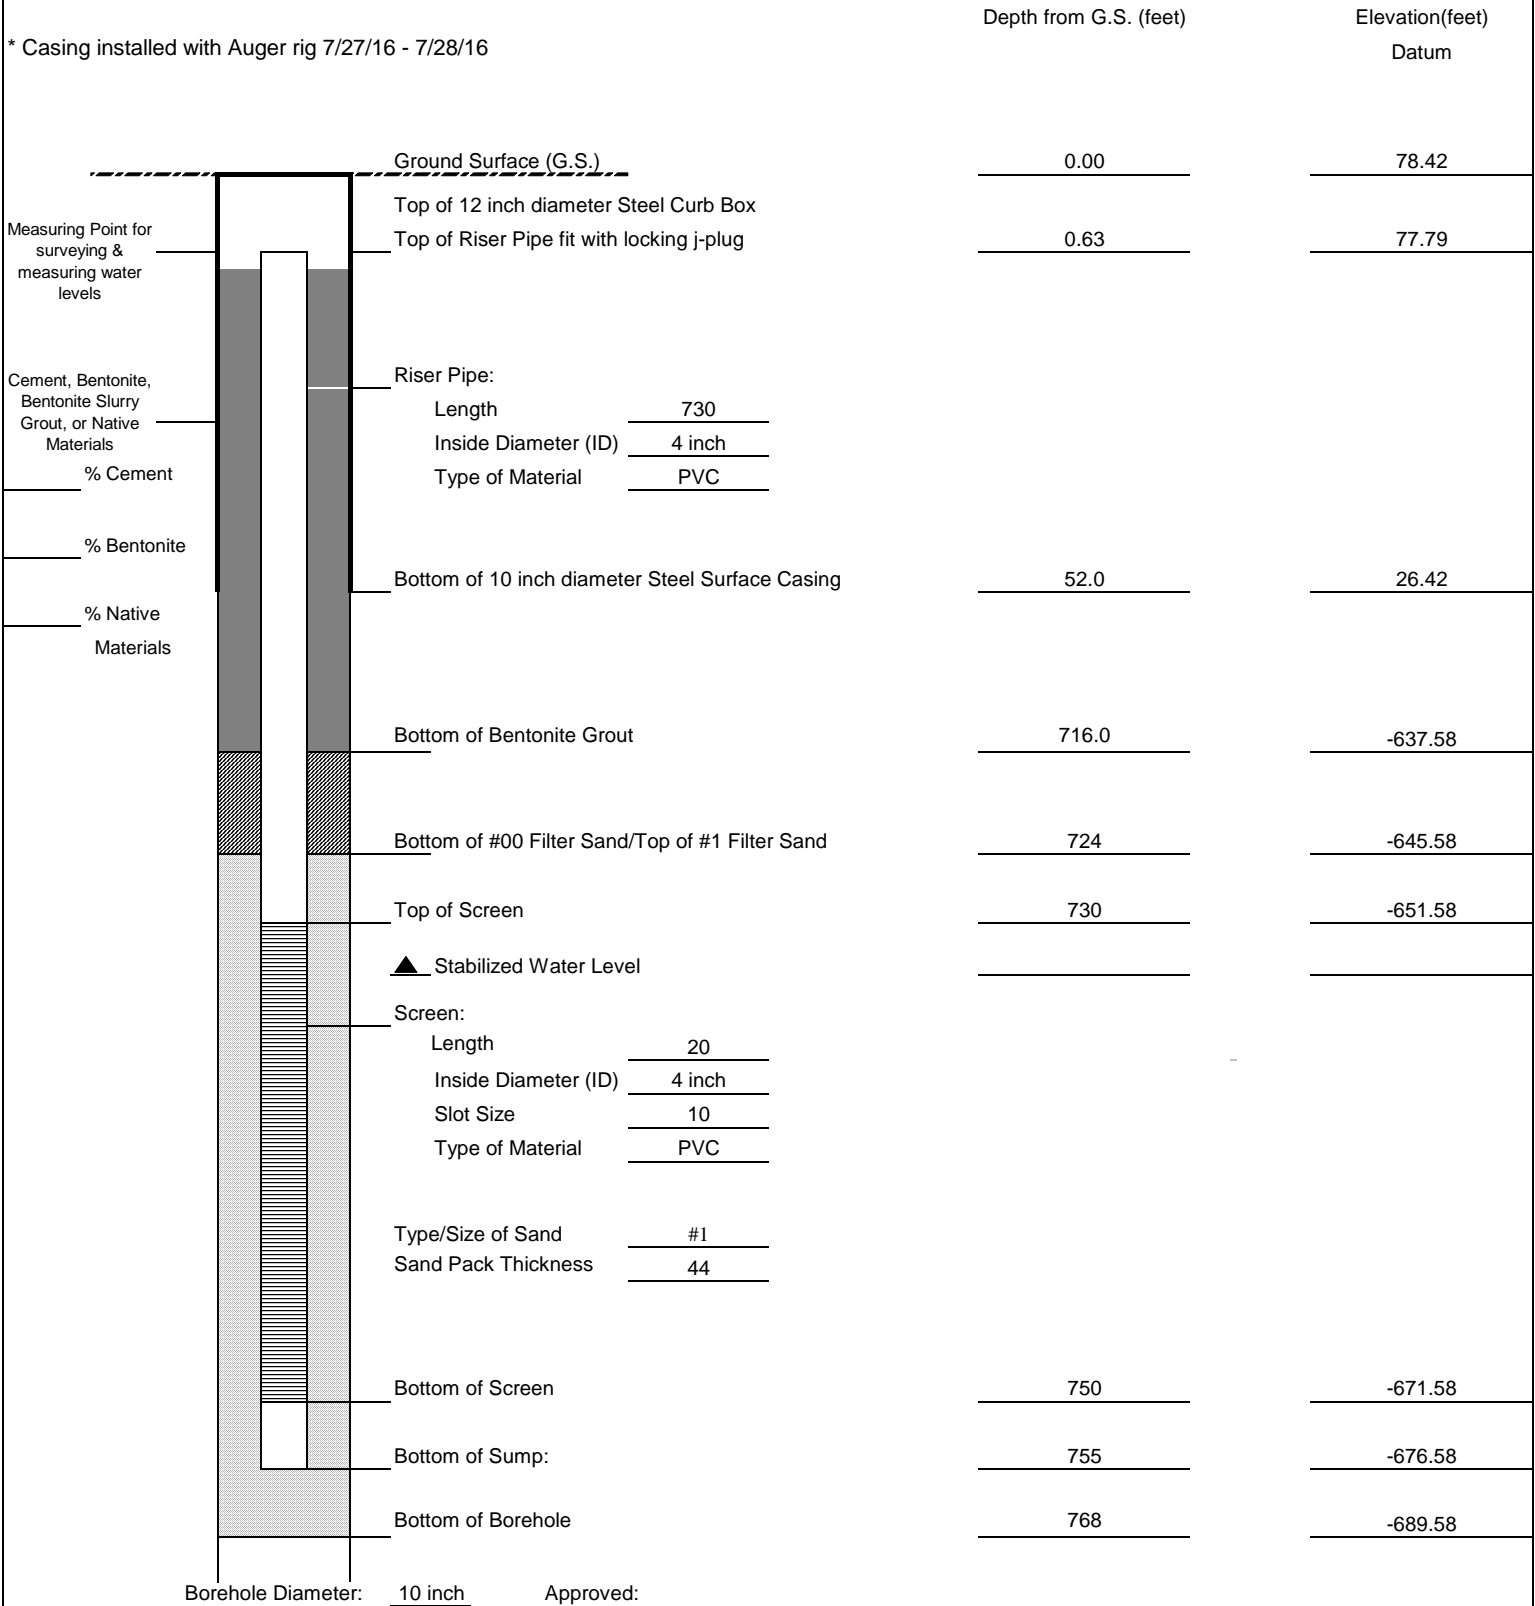

Describe Measuring Point: Valerie Thayer 8/18/2016  
 Ground Surface Signature Date

**Section 4**

**Groundwater Sample Log Sheets**



RESOLUTION CONSULTANTS

Well ID: RE 12401

# Low Flow Ground Water Sample Collection Record

Client: NWIRP Bethpage Date: 10/18/16 Time: Start 0920 am/pm  
 Project No: 60266526 Finish 1130 am/pm  
 Site Location: Forge  
 Weather Conds: Sunny 70° Collector(s): Saby Chatterjee

### 1. WATER LEVEL DATA: (measured from Top of Casing)

- a. Total Well Length 685 ft c. Length of Water Column \_\_\_\_\_ ft (a-b) Casing Diameter/Material 4-inch PVC  
 b. Water Table Depth 37.45 ft d. Calculated System Volume (see back) 17.1 gal. 28 screen length (ft)

### 2. WELL PURGE DATA

a. Purge Method: Geotech bladder pump with drop tube assembly

b. Acceptance Criteria defined (see workplan)

- Temperature ± 3%
  - pH ± 0.1 unit
  - Conductivity ± 3%
  - Turbidity ± 10%
  - ORP ± 10mV
  - Drawdown < 0.3'
  - D.O. ± 10% (values >0.5 mg/L)
- Remove a minimum 1 screen volume

c. Field Testing Equipment used:

Make	Model	Serial Number
YSI	556	74830
LaMotte	2020	82090

Time (24hr)	Volume Removed (gallons)	Temp. (°C)	Conduct. (mS/cm)	DO (mg/L)	pH	ORP (mV)	Turbidity (NTU)	Flow Rate (mL/min)	Depth to water (ft)	Color/Odor
0920										Start
0925		17.84	0.063	4.71	4.40	66	<del>36.4</del> 38	550	36.55	cloudy
0930		17.51	0.060	5.65	4.45	169	<del>38.4</del> 38.5	550		no odor
0935		17.41	0.059	4.78	2.72	71.6		550	36.75	
0940		17.34	0.058	4.44	2.22	91.3				
0945		17.33	0.058	4.47	2.19	94.1	55.4	550	36.75	

- d. Acceptance criteria pass/fail
- |                                     |   |                             |                              |
|-------------------------------------|---|-----------------------------|------------------------------|
| Has required volume been removed    | Yes <input checked="" type="checkbox"/> | No <input type="checkbox"/> | N/A <input type="checkbox"/> |
| Has required turbidity been reached | Yes <input checked="" type="checkbox"/> | No <input type="checkbox"/> | N/A <input type="checkbox"/> |
| Have parameters stabilized          | Yes <input checked="" type="checkbox"/> | No <input type="checkbox"/> | N/A <input type="checkbox"/> |
- If no or N/A - Explain below.
- (continued on back)

### 3. SAMPLE COLLECTION:


Method: Geotech bladder pump with drop tube assembly

Sample ID	Container Type	No. of Containers	Preservation	Analysis Req.	Time
RE 12401-GW-101816	40-mL vials	3	HCl	VOCs	1050
RE 12401-GW-101816	1-L amber	2	none	1,4-Dioxane	

Comments: hit bottom, turbid, 45ft of drop tube is 1/2 inch ID poly - NEED TO REPLACE

Signature: Saby Chatterjee Date: 10/18/16

# Purge Volume Calculation

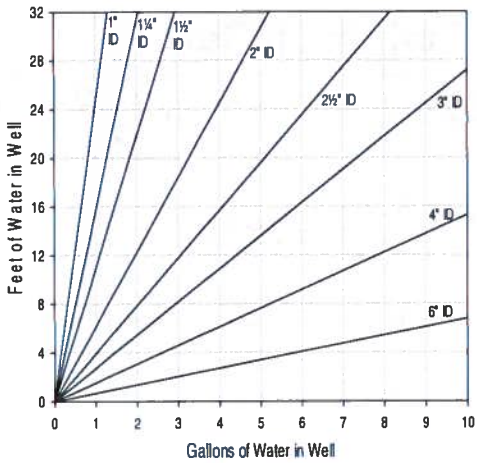

Volume / Linear Ft. of Pipe		
ID (in)	Gallon	Liter
0.25	0.0025	0.0097
0.375	0.0057	0.0217
0.5	0.0102	0.0386
0.75	0.0229	0.0869
1	0.0408	0.1544
1.25	0.0637	0.2413
1.5	0.0918	0.3475
2	0.1632	0.6178
2.5	0.2550	0.9653
3	0.3672	1.3900
4	0.6528	2.4711
6	1.4688	5.5600

One screen volume (4-inch well)

15 ft = 37.1 L / 9.8 G  
 20 ft = 49.4 L / 13.1 G  
 25 ft = 61.8 L / 16.3 G  
 30 ft = 74.3 L / 19.6 G  
 40 ft = 99.2 L / 26.1 G  
 50 ft = 123.6 L / 32.6 G

Well ID:

(continued from front)										
Time (24 hr)	Volume Removed (gallons)	Temp (°C)	Conduct. (mS/cm)	DO (mg/L)	pH	ORP (mV)	Turbidity (NTU)	Flow Rate (mL/min)	Depth to water (ft)	Color/Odor
0950		17.28	0.058	4.56	2.09	93.1	55.7	550		Cloudy
0955		17.38	0.059	4.49	2.05	90.7				No odor
1000	5G	17.44	0.059	4.53	2.08	83.3		550	36.75	
1005		17.39	0.058	4.13	2.19	65.4	66.4			
1010		17.45	0.058	4.04	2.26	56.2	<del>60</del>		36.75	
1015		17.49	0.058	3.80	2.44	57.5	69.5	550		
1020		17.47	0.058	3.78	2.58	79.7		550	36.75	
1025	10G	17.37	0.058	3.44	2.84	82.4	59.5		36.75	
1030		17.39	0.058	3.49	2.99	85.3		550		
1035		17.43	0.059	3.51	2.98	80.3	64.1	550	36.75	
1040		17.41	0.058	3.54	3.01	84.1	58.4	550	36.75	
1045										
Sample time		1050						200		



RESOLUTION CONSULTANTS

Well ID: RE12402

# Low Flow Ground Water Sample Collection Record

Client: NWIRP Bethpage Date: 10-18-16 Time: Start 820 am/pm  
 Project No: 60266526 Finish 1130 am/pm  
 Site Location: Forge  
 Weather Conds: Sunny 70° Collector(s): Paul Kaveash

### 1. WATER LEVEL DATA: (measured from Top of Casing)

a. Total Well Length 755 ft c. Length of Water Column \_\_\_\_\_ ft (a-b) Casing Diameter/Material 4-inch PVC  
 b. Water Table Depth 37.30 ft d. Calculated System Volume (see back) 131 gal. 20 screen length (ft)

### 2. WELL PURGE DATA

a. Purge Method: Geotech bladder pump with drop tube assembly

#### b. Acceptance Criteria defined (see workplan)

- Temperature ± 3%
  - pH ± 0.1 unit
  - Conductivity ± 3%
  - Turbidity ± 10%
  - ORP ± 10mV
  - Drawdown < 0.3'
  - D.O. ± 10% (values >0.5 mg/L)
- Remove a minimum 1 screen volume

#### c. Field Testing Equipment used:

Make	Model	Serial Number
YSI	556	15A28
LaMotte	2020	82080

Time (24hr)	Volume Removed (gallons)	Temp. (°C)	Conduct. (mS/cm)	DO (mg/L)	pH	ORP (mV)	Turbidity (NTU)	Flow Rate (mL/min)	Depth to water (ft)	Color/Odor
850										ON
855		15.88	0.041	7.98	4.62	163.8				
0900		15.82	0.042	7.57	4.84	150.3	58.3			
915	5 gal									
928		15.73	0.055	6.16	5.53	121.1	51	600	37.50	
930		15.74	0.046	5.88	5.62	114.3				

d. Acceptance criteria pass/fail

Has required volume been removed	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	N/A <input type="checkbox"/>	(continued on back)
Has required turbidity been reached	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	N/A <input type="checkbox"/>	
Have parameters stabilized	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	N/A <input type="checkbox"/>	

If no or N/A - Explain below.

### 3. SAMPLE COLLECTION:


Method: Geotech bladder pump with drop tube assembly

Sample ID	Container Type	No. of Containers	Preservation	Analysis Req.	Time
<u>RE12402-GW-101816</u>	40-mL vials	3	HCl	VOCs	<u>1020</u>
	1-L amber	2	none	1,4-Dioxane	

Comments: hit bottom while inserting tubing, stirred up the silt in the sump  
MS/MSD

Signature: Paul Kaveash Date: 10-18-16

Purge Volume Calculation

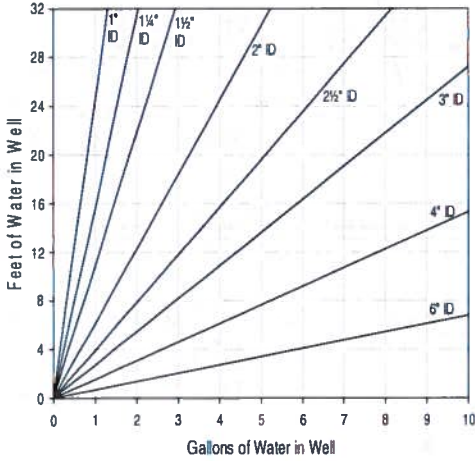

ID (in)	Gallon	Liter
0.25	0.0025	0.0097
0.375	0.0057	0.0217
0.5	0.0102	0.0386
0.75	0.0229	0.0869
1	0.0408	0.1544
1.25	0.0637	0.2413
1.5	0.0918	0.3475
2	0.1632	0.6178
2.5	0.2550	0.9653
3	0.3672	1.3900
4	0.6528	2.4711
6	1.4688	5.5600

One screen volume  
(4-inch well)  
  
 15 ft = 37.1 L / 9.8 G  
 20 ft = 49.4 L / 13.1 G  
 25 ft = 61.8 L / 16.3 G  
 30 ft = 74.3 L / 19.6 G  
 40 ft = 99.2 L / 26.1 G  
 50 ft = 123.6 L / 32.6 G

Well ID: RE124DZ 8.50

(continued from front)										
Time (24 hr)	Volume Removed (gallons)	Temp (°C)	Conduct. (mS/cm)	DO (mg/L)	pH	ORP (mV)	Turbidity (NTU)	Flow Rate (mL/min)	Depth to water (ft)	Color/Odor
935		15.74	0.046	5.71	5.64	118.4	83			
940	12 gal	15.77	0.046	5.39	5.68	115.9	53			
945		15.73	0.047	5.11	5.73	114.3	39	600	37.49	
950		15.72	0.047	4.89	5.74	113.0	30			
955		15.79	0.046	4.70	5.75	111.0	80.5			
1000		15.74	0.046	4.53	5.76	108.6	75.9		37.50	
1005	13 gal	15.71	0.046	4.41	5.80	108.7	68.9			ready to sample
1020								200		sample
										start 1015 end 1050
										MS/MSD

## **Section 5**

### **Analytical Data Validation**

[The Data Validation report included here contains only result tables for RE124D1 and RE124D2; for the complete September-October 2016 Quarterly Sampling Data Validation report with all well results tables, see Sept-Oct (3Q) 2016 Groundwater Sampling Data Summary Report, Bethpage, NY, Resolution Consultants, 2017.]



September 2016  
Final Results after Data Review  
NWIRP Bethpage OU 2 Regional Groundwater Investigation

Sample Delivery Group				SJ8622		
Lab ID				SJ8622-2		
Sample ID				RE124D1-GW-101816		
Sample Date				10/18/2016		
Sample Type				Groundwater		
Method	Analyte	CAS No	Units	Result	Qual	RC
8260C	1,1,1-TRICHLOROETHANE	71-55-6	UG_L	0.5	U	
8260C	1,1,2,2-TETRACHLOROETHANE	79-34-5	UG_L	0.5	U	
8260C	1,1,2-TRICHLORO-1,2,2-TRIFLUOROETHANE	76-13-1	UG_L	33		
8260C	1,1,2-TRICHLOROETHANE	79-00-5	UG_L	0.5	U	
8260C	1,1-DICHLOROETHANE	75-34-3	UG_L	0.5	U	
8260C	1,1-DICHLOROETHENE	75-35-4	UG_L	0.5	U	
8260C	1,2,4-TRICHLOROBENZENE	120-82-1	UG_L	0.5	U	
8260C	1,2-DIBROMO-3-CHLOROPROPANE	96-12-8	UG_L	0.75	U	
8260C	1,2-DIBROMOETHANE	106-93-4	UG_L	0.5	U	
8260C	1,2-DICHLOROBENZENE	95-50-1	UG_L	0.5	U	
8260C	1,2-DICHLOROETHANE	107-06-2	UG_L	0.5	U	
8260C	1,2-DICHLOROETHENE, TOTAL	540-59-0	UG_L	0.29	J	
8260C	1,2-DICHLOROPROPANE	78-87-5	UG_L	0.5	U	
8260C	1,3-DICHLOROBENZENE	541-73-1	UG_L	0.5	U	
8260C	1,4-DICHLOROBENZENE	106-46-7	UG_L	0.5	U	
8260C	2-BUTANONE	78-93-3	UG_L	2.5	UJ	c
8260C	2-HEXANONE	591-78-6	UG_L	2.5	U	
8260C	4-METHYL-2-PENTANONE	108-10-1	UG_L	2.5	U	
8260C	ACETONE	67-64-1	UG_L	3.3	J	l,c
8260C	BENZENE	71-43-2	UG_L	0.5	U	
8260C	BROMODICHLOROMETHANE	75-27-4	UG_L	0.5	U	
8260C	BROMOFORM	75-25-2	UG_L	0.5	U	
8260C	BROMOMETHANE	74-83-9	UG_L	1	U	
8260C	CARBON DISULFIDE	75-15-0	UG_L	0.5	UJ	c
8260C	CARBON TETRACHLORIDE	56-23-5	UG_L	0.5	U	
8260C	CHLOROBENZENE	108-90-7	UG_L	0.5	U	
8260C	CHLOROETHANE	75-00-3	UG_L	1	UJ	c
8260C	CHLOROFORM	67-66-3	UG_L	0.5	U	
8260C	CHLOROMETHANE	74-87-3	UG_L	1	UJ	c
8260C	CIS-1,2-DICHLOROETHENE	156-59-2	UG_L	0.29	J	
8260C	CIS-1,3-DICHLOROPROPENE	10061-01-5	UG_L	0.5	U	
8260C	CYCLOHEXANE	110-82-7	UG_L	0.5	U	
8260C	DIBROMOCHLOROMETHANE	124-48-1	UG_L	0.5	U	
8260C	DICHLORODIFLUOROMETHANE	75-71-8	UG_L	1	UJ	c
8260C	ETHYLBENZENE	100-41-4	UG_L	0.5	U	
8260C	ISOPROPYLBENZENE	98-82-8	UG_L	0.5	U	
8260C	M- AND P-XYLENE	108-38-3/106-42	UG_L	1	U	
8260C	METHYL ACETATE	79-20-9	UG_L	0.75	U	
8260C	METHYL CYCLOHEXANE	108-87-2	UG_L	0.5	U	
8260C	METHYL TERT-BUTYL ETHER	1634-04-4	UG_L	0.5	U	
8260C	METHYLENE CHLORIDE	75-09-2	UG_L	2.5	U	
8260C	O-XYLENE	95-47-6	UG_L	0.5	U	
8260C	STYRENE	100-42-5	UG_L	0.5	U	
8260C	TETRACHLOROETHENE	127-18-4	UG_L	0.5	U	
8260C	TOLUENE	108-88-3	UG_L	0.5	U	
8260C	TRANS-1,2-DICHLOROETHENE	156-60-5	UG_L	0.5	U	
8260C	TRANS-1,3-DICHLOROPROPENE	10061-02-6	UG_L	0.5	U	
8260C	TRICHLOROETHENE	79-01-6	UG_L	1.7		
8260C	TRICHLOROFLUOROMETHANE	75-69-4	UG_L	1	U	
8260C	VINYL CHLORIDE	75-01-4	UG_L	1	U	
8260C	XYLENES, TOTAL	1330-20-7	UG_L	1.5	U	
8270D_SIM	1,4-DIOXANE	123-91-1	UG_L	2.5		

**Notes:**

- UG\_L = Micrograms per liter
- NA = Not applicable
- Qual = Final qualifiers (See Attachment B)
- RC = Reason codes (See Attachment C)

September 2016  
Final Results after Data Review  
NWIRP Bethpage OU 2 Regional Groundwater Investigation

Sample Delivery Group				SJ8622		
Lab ID				SJ8622-3		
Sample ID				RE124D2-GW-101816		
Sample Date				10/18/2016		
Sample Type				Groundwater		
Method	Analyte	CAS No	Units	Result	Qual	RC
8260C	1,1,1-TRICHLOROETHANE	71-55-6	UG_L	0.5	U	
8260C	1,1,2,2-TETRACHLOROETHANE	79-34-5	UG_L	0.5	U	
8260C	1,1,2-TRICHLORO-1,2,2-TRIFLUOROETHANE	76-13-1	UG_L	0.5	U	
8260C	1,1,2-TRICHLOROETHANE	79-00-5	UG_L	0.5	U	
8260C	1,1-DICHLOROETHANE	75-34-3	UG_L	0.5	U	
8260C	1,1-DICHLOROETHENE	75-35-4	UG_L	0.5	U	
8260C	1,2,4-TRICHLOROBENZENE	120-82-1	UG_L	0.5	U	
8260C	1,2-DIBROMO-3-CHLOROPROPANE	96-12-8	UG_L	0.75	U	
8260C	1,2-DIBROMOETHANE	106-93-4	UG_L	0.5	U	
8260C	1,2-DICHLOROBENZENE	95-50-1	UG_L	0.5	U	
8260C	1,2-DICHLOROETHANE	107-06-2	UG_L	0.5	U	
8260C	1,2-DICHLOROETHENE, TOTAL	540-59-0	UG_L	1	U	
8260C	1,2-DICHLOROPROPANE	78-87-5	UG_L	0.5	U	
8260C	1,3-DICHLOROBENZENE	541-73-1	UG_L	0.5	U	
8260C	1,4-DICHLOROBENZENE	106-46-7	UG_L	0.5	U	
8260C	2-BUTANONE	78-93-3	UG_L	2.5	U	
8260C	2-HEXANONE	591-78-6	UG_L	2.5	U	
8260C	4-METHYL-2-PENTANONE	108-10-1	UG_L	2.5	U	
8260C	ACETONE	67-64-1	UG_L	2.4	J	
8260C	BENZENE	71-43-2	UG_L	0.5	U	
8260C	BROMODICHLOROMETHANE	75-27-4	UG_L	0.5	U	
8260C	BROMOFORM	75-25-2	UG_L	0.5	U	
8260C	BROMOMETHANE	74-83-9	UG_L	1	U	
8260C	CARBON DISULFIDE	75-15-0	UG_L	0.5	UJ	c
8260C	CARBON TETRACHLORIDE	56-23-5	UG_L	0.5	U	
8260C	CHLOROBENZENE	108-90-7	UG_L	0.5	U	
8260C	CHLOROETHANE	75-00-3	UG_L	1	U	
8260C	CHLOROFORM	67-66-3	UG_L	0.5	U	
8260C	CHLOROMETHANE	74-87-3	UG_L	1	U	
8260C	CIS-1,2-DICHLOROETHENE	156-59-2	UG_L	0.5	U	
8260C	CIS-1,3-DICHLOROPROPENE	10061-01-5	UG_L	0.5	U	
8260C	CYCLOHEXANE	110-82-7	UG_L	0.5	U	
8260C	DIBROMOCHLOROMETHANE	124-48-1	UG_L	0.5	U	
8260C	DICHLORODIFLUOROMETHANE	75-71-8	UG_L	1	U	
8260C	ETHYLBENZENE	100-41-4	UG_L	0.5	U	
8260C	ISOPROPYLBENZENE	98-82-8	UG_L	0.5	U	
8260C	M- AND P-XYLENE	108-38-3/106-42	UG_L	1	U	
8260C	METHYL ACETATE	79-20-9	UG_L	0.75	U	
8260C	METHYL CYCLOHEXANE	108-87-2	UG_L	0.5	U	
8260C	METHYL TERT-BUTYL ETHER	1634-04-4	UG_L	0.5	U	
8260C	METHYLENE CHLORIDE	75-09-2	UG_L	2.5	U	
8260C	O-XYLENE	95-47-6	UG_L	0.5	U	
8260C	STYRENE	100-42-5	UG_L	0.5	U	
8260C	TETRACHLOROETHENE	127-18-4	UG_L	0.5	U	
8260C	TOLUENE	108-88-3	UG_L	0.5	U	
8260C	TRANS-1,2-DICHLOROETHENE	156-60-5	UG_L	0.5	U	
8260C	TRANS-1,3-DICHLOROPROPENE	10061-02-6	UG_L	0.5	U	
8260C	TRICHLOROETHENE	79-01-6	UG_L	0.5	U	
8260C	TRICHLOROFLUOROMETHANE	75-69-4	UG_L	1	U	
8260C	VINYL CHLORIDE	75-01-4	UG_L	1	U	
8260C	XYLENES, TOTAL	1330-20-7	UG_L	1.5	U	
8270D_SIM	1,4-DIOXANE	123-91-1	UG_L	0.17	U	

**Notes:**

- UG\_L = Micrograms per liter
- NA = Not applicable
- Qual = Final qualifiers (See Attachment B)
- RC = Reason codes (See Attachment C)



## DATA VALIDATION REPORT

Project:	Regional Groundwater Investigation — NWIRP Bethpage		
Laboratory:	Katahdin Analytical		
Sample Delivery Groups:	SJ7131 and SJ7396		
Analyses/Method:	Total Organic Carbon (TOC) by U.S. EPA SW-846 Method 9060A and Standard Method 5310B for Total Organic Carbon by High-Temperature Combustion		
Validation Level:	3		
Project Number:	0888812477.SA.DV		
Prepared by:	Dana Miller/Resolution Consultants	Completed on:	10/23/2016
Reviewed by:	Tina Cantwell/Resolution Consultants	File Name:	SJ7131_SJ7396_9060A_5310B

## SUMMARY

This report summarizes data review findings for samples listed below, collected by Resolution Consultants from the Regional Groundwater Investigation — NWIRP Bethpage site on 2 and 14 September 2016 in accordance with the following Sampling and Analysis Plans:

- *Sampling and Analysis Plan, Bethpage, New York.* (Resolution Consultants April 2013).
- *UFP SAP Addendum, Installation of Vertical Profile Borings and Monitoring Wells, Operable Unit 2, NWIRP Bethpage, New York.* (Resolution Consultants November 2013).
- *UFP SAP Addendum, Inclusion of Additional Target Analytes for Volatile Organics Analyses, NWIRP Bethpage OU2, Bethpage, New York.* (Resolution Consultants August 2014).

Sample ID	Lab ID	Matrix/Sample Type	Analysis
RE124D1-EB-090216	SJ7131-1	Equipment Blank	5310B
RE124D1-SO-090216-663-665	SJ7131-2	Soil	9060A
RE124D1-FB-091416	SJ7396-1	Field Blank	5310B

Data validation activities were conducted using the following guidance documents: *Test Methods for Evaluating Solid Waste, Physical/Chemical Methods SW-846, specifically Method 9060A, Total Organic Carbon* (U.S. EPA, 1996), *Method SM5310B, Total Organic Carbon by High-Temperature Combustion, U.S. Environmental Protection Agency (U.S. EPA) Contract Laboratory Program National Functional Guidelines for Inorganic Superfund Data Review* (NFG, January 2010, and Department of Defense

(DoD) Quality Systems Manual (QSM) for Environmental Laboratories, Version 4.2 (October 2010). In the absence of method-specific information, laboratory quality control (QC) limits, project-specific requirements and/or professional judgment were used as appropriate.

## **REVIEW ELEMENTS**

The data were evaluated based on the following parameters (where applicable to the method):

- ✓ Data completeness (chain-of-custody)/sample integrity
- ✓ Holding times and sample preservation
- ✓ Gas chromatography/Mass spectrometer performance checks
- ✓ Initial calibration/continuing calibration verification
- ✓ Laboratory blanks/equipment blanks/field blanks/trip blanks
- NA Surrogate spike recoveries
- ✓ Matrix spike and/or matrix spike duplicate results
- ✓ Laboratory control sample laboratory control sample duplicate results
- NA Field duplicates
- NA Internal standards
- ✓ Sample results/reporting issues

The symbol (✓) indicates that no validation qualifiers were applied based on this parameter. NA indicates that the parameter was not included as part of this data set or was not applicable to this validation and therefore not reviewed. Acceptable data parameters for which all criteria were met and no qualification was performed, and non-conformance or other issues that were noted during validation, but did not result in qualification of data are not discussed further.

## **Qualifications Actions**

The data were reviewed independently from the laboratory to assess data quality. All compounds detected at concentrations less than the limit of quantitation but greater than the method detection limit were qualified by the laboratory as estimated (J). This "J" qualifier was retained during data validation. Any sample that was analyzed at a dilution because of high concentrations of target or non-target analytes was checked to confirm that the results and/or sample-specific limit of quantitation and limit of detections were adjusted accordingly by the laboratory.

No results were qualified during this review. Analytical completeness was calculated to be 100% and the data are usable for their intended purpose, according to U.S. Environmental Protection Agency and Department of Defense guidelines. Attachment A, Table A-1 provides final results after data review.

**ATTACHMENTS**

Attachment A: Table A-1 Final Results after Data Review

**Attachment A**  
**Final Results after Data Review**

**Table A-1  
Final Results after Data Review  
Regional Groundwater Investigation NWIRP Bethpage**

<b>Sample Delivery Group</b>				SJ7131	SJ7131	SJ7396
<b>Lab ID</b>				SJ7131-1	SJ7131-2	SJ7396-1
<b>Sample ID</b>				RE124D1-EB-090216	RE124D1-SO-090216-663-665	RE124D1-FB-091416
<b>Sample Date</b>				9/2/2016	9/2/2016	9/14/2016
<b>Sample Type</b>				Equipment Blank	Soil	Field Blank
<b>Method</b>	<b>Analyte</b>	<b>CAS No</b>	<b>Units</b>	Result	Result	Result
2540G	TOTAL SOLIDS	-29	PCT	NA	85	NA
5310B	TOTAL ORGANIC CARBON	-28	MG_L	0.36 J	NA	0.5 J
9060A	TOTAL ORGANIC CARBON	-28	UG_G	NA	510	NA

**Notes:**

- ID = Identification
- PCT = Percent
- MG\_L = Milligrams per liter
- UG\_G = Micrograms per gram
- NA = Not analyzed
- J = Estimated value – Value was below the limit of quantitation.



**DATA VALIDATION REPORT**

Project:	Regional Groundwater Investigation — NWIRP Bethpage	
Laboratory:	Katahdin Analytical	
Sample Delivery Groups:	SJ6486	
Analyses/Method:	Total Organic Carbon (TOC) by U.S. EPA SW-846 Method 9060A and Standard Method 5310B for Total Organic Carbon by High-Temperature Combustion	
Validation Level:	3	
Project Number:	0888812477.SA.DV	
Prepared by:	Dana Miller/Resolution Consultants	Completed on: 10/23/2016
Reviewed by:	Tina Cantwell/Resolution Consultants	File Name: SJ6486_9060A_5310B

**SUMMARY**

This report summarizes data review findings for samples listed below, collected by Resolution Consultants from the Regional Groundwater Investigation — NWIRP Bethpage site on 16 August 2016 in accordance with the following Sampling and Analysis Plans:

- *Sampling and Analysis Plan, Bethpage, New York.* (Resolution Consultants April 2013).
- *UFP SAP Addendum, Installation of Vertical Profile Borings and Monitoring Wells, Operable Unit 2, NWIRP Bethpage, New York.* (Resolution Consultants November 2013).
- *UFP SAP Addendum, Inclusion of Additional Target Analytes for Volatile Organics Analyses, NWIRP Bethpage OU2, Bethpage, New York.* (Resolution Consultants August 2014).

Sample ID	Lab ID	Matrix/Sample Type	Analysis
RE124D2-EB-081616	SJ6486-1	Equipment Blank	5310B
RE124D2-SOIL-081616-733-735	SJ6486-2	Soil	9060A

Data validation activities were conducted using the following guidance documents: *Test Methods for Evaluating Solid Waste, Physical/Chemical Methods SW-846, specifically Method 9060A, Total Organic Carbon* (U.S. EPA, 1996), *Method SM5310B, Total Organic Carbon by High-Temperature Combustion*, *U.S. Environmental Protection Agency (U.S. EPA) Contract Laboratory Program National Functional Guidelines for Inorganic Superfund Data Review* (NFG, January 2010, and Department of Defense (DoD) Quality Systems Manual (QSM) for Environmental Laboratories, Version 4.2 (October 2010). In



the absence of method-specific information, laboratory quality control (QC) limits, project-specific requirements and/or professional judgment were used as appropriate.

## **REVIEW ELEMENTS**

The data were evaluated based on the following parameters (where applicable to the method):

- ✓ Data completeness (chain-of-custody)/sample integrity
- ✓ Holding times and sample preservation
- ✓ Gas chromatography/Mass spectrometer performance checks
- ✓ Initial calibration/continuing calibration verification
- ✓ Laboratory blanks/equipment blanks/field blanks/trip blanks
- NA Surrogate spike recoveries
- ✓ Matrix spike and/or matrix spike duplicate results
- ✓ Laboratory control sample laboratory control sample duplicate results
- NA Field duplicates
- NA Internal standards
- ✓ Sample results/reporting issues

The symbol (✓) indicates that no validation qualifiers were applied based on this parameter. NA indicates that the parameter was not included as part of this data set or was not applicable to this validation and therefore not reviewed. Acceptable data parameters for which all criteria were met and no qualification was performed, and non-conformance or other issues that were noted during validation, but did not result in qualification of data are not discussed further.

## **Qualifications Actions**

The data were reviewed independently from the laboratory to assess data quality. All compounds detected at concentrations less than the limit of quantitation but greater than the method detection limit were qualified by the laboratory as estimated (J). This "J" qualifier was retained during data validation. Any sample that was analyzed at a dilution because of high concentrations of target or non-target analytes was checked to confirm that the results and/or sample-specific limit of quantitation and limit of detections were adjusted accordingly by the laboratory.

No results were qualified during this review. Analytical completeness was calculated to be 100% and the data are usable for their intended purpose, according to U.S. Environmental Protection Agency and Department of Defense guidelines. Attachment A, Table A-1 provides final results after data review.

**ATTACHMENTS**

Attachment A: Table A-1 Final Results after Data Review

**Attachment A**  
**Final Results after Data Review**

**Table A-1**  
**Final Results after Data Review**  
**Regional Groundwater Investigation NWIRP Bethpage**

Sample Delivery Group				SJ6486		SJ6486	
Lab ID				SJ6486-1		SJ6486-2	
Sample ID				RE124D2-EB-081616		RE124D2-SOIL-081616-733-735	
Sample Date				8/16/2016		8/16/2016	
Sample Type				Equipment Blank		Soil	
Method	Analyte	CAS No	Units	Result	Qual	Result	Qual
2540G	TOTAL SOLIDS	-29	PCT	NA		78	
5310B	TOTAL ORGANIC CARBON	-28	MG_L	0.22	J	NA	
9060A	TOTAL ORGANIC CARBON	-28	UG_G	NA		1300	

**Notes:**

- ID = Identification
- PCT = Percent
- MG\_L = Milligrams per liter
- UG\_G = Micrograms per gram
- Qual = Final interpreted qualifier
- NA = Not analyzed
- J = Estimated value – Value was below the limit of quantitation.

## **Section 6**


### **Survey**

Description	Northing	Easting	Latitude	Longitude	Ground	Rim	PVC
VPB 158	202259.10	1122890.83	N40-43-14.68	W73-29-59.42	75.07	NA	NA
RE 124 D1	202702.46	1122969.80	N40-43-19.06	W73-29-58.37	78.77	78.88	78.26
RE 124 D2	202685.97	1122972.34	N40-43-18.89	W73-29-58.33	78.42	78.58	77.79


Map Notes

- Information shown hereon was compiled from an actual field survey conducted on March 26, 2015 and October 12, 2016.
- North orientation is Grid North based on the New York State Plane Coordinate System, Long Island Zone, NAD 83 as obtained from GPS observations.
- Vertical datum shown hereon is NAVD 88 as obtained from GPS observations.



BENCHMARK  
"X-CUT" IN CONCRETE CURB  
ELEVATION=78.66'

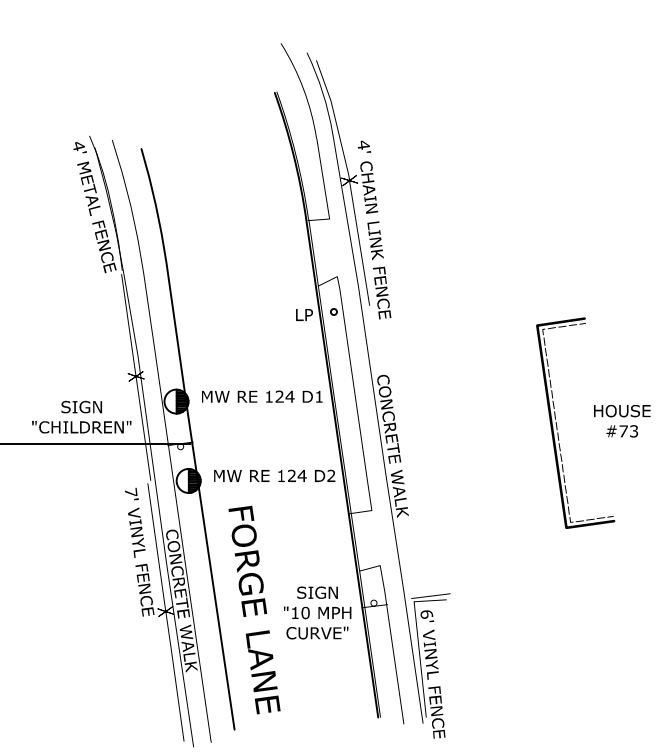

BREAK LINE "A"  
BREAK LINE "A"



- Legend
- LP Light Pole
  - MW RE 124 D1 Monitoring Well
  - SMH Sanitary Manhole
  - VPB 158 Vertical Profile Boring
  - WSO Water Shut Off
  - WV Water Valve

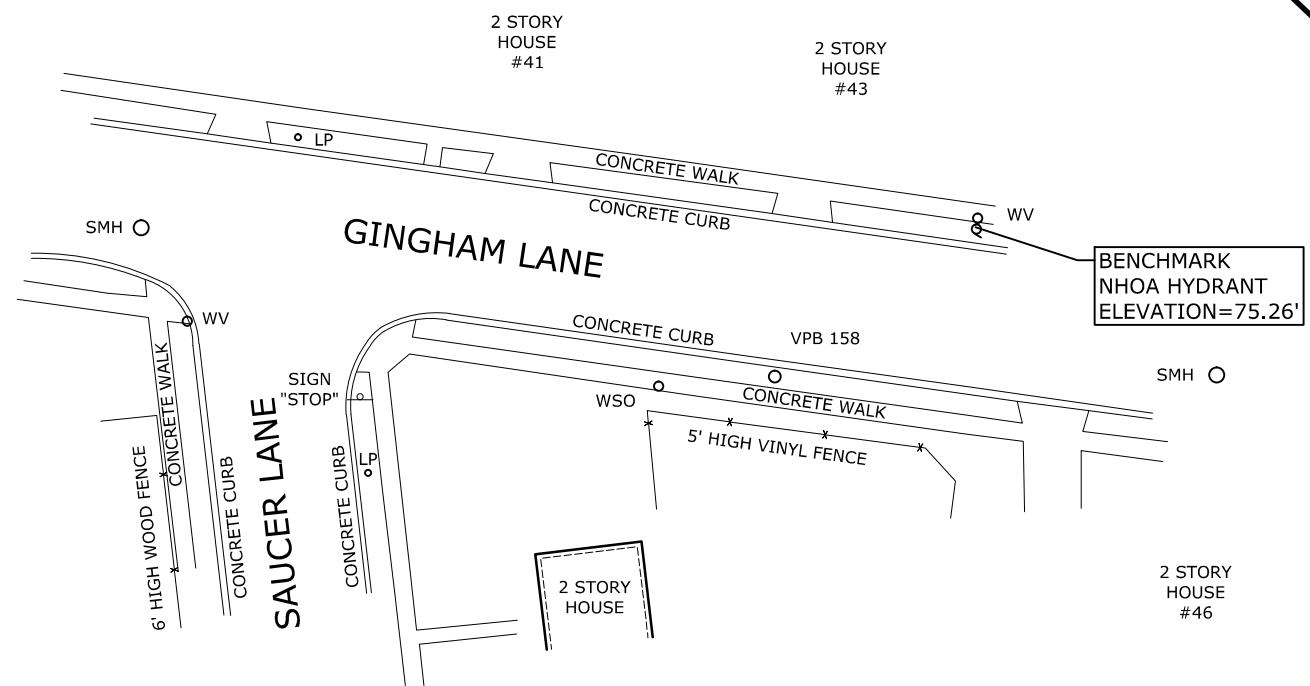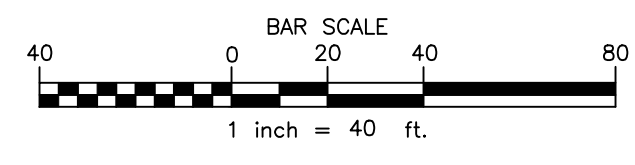

"ONLY COPIES OF THIS MAP SIGNED IN RED INK AND EMBOSSED WITH THE SEAL OF AN OFFICER OF C.T. MALE ASSOCIATES OR A DESIGNATED REPRESENTATIVE SHALL BE CONSIDERED TO BE A VALID TRUE COPY".

UNAUTHORIZED ALTERATION OR ADDITION TO THIS DOCUMENT IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW.

© 2016  
C.T. MALE ASSOCIATES

APPROVED: JFC

DRAFTED : GLB

CHECKED : JFC

PROJ. NO : 14.4121

SCALE : 1" = 40'

DATE : MARCH 26, 2015

**VERTICAL PROFILE BORING 158 SURVEY LOCATION**  
**46 GINGHAM LANE**

TOWN OF LEVITTOWN NASSAU COUNTY, NEW YORK

**C.T. MALE ASSOCIATES**  
Engineering, Surveying, Architecture & Landscape Architecture, D.P.C.

50 CENTURY HILL DRIVE, LATHAM, NY 12110  
518.786.7400 \* FAX 518.786.7299

SHEET 1 OF 1

DWG. NO: 15-218

**Appendix B**  
**Geologic Cross Sections derived from**  
**Environmental Sequence Stratigraphy (ESS)**

## **Appendix B. Geologic Cross Sections derived from Environmental Sequence Stratigraphy**

Resolution Consultants reviewed the geologic data and regional literature at the Naval Weapons Industrial Reserve Plant at Bethpage, New York and developed four representative base-wide cross sections to support development of a CSM. The cross sections are presented in Figure 1 - Figure 4. The cross sections provide geologic context for groundwater and analytical data and can be used as the framework upon which new and existing datasets (groundwater, analytical chemistry, geophysical data, etc.) can be analyzed to better understand groundwater flow-paths and contaminant transport and storage zones. As such, these sections are an integral component of an effective CSM.

The cross sections were developed using ESS. The ESS approach examines subsurface data in the context of the depositional environments and petroleum industry best practices of sequence stratigraphy and facies models. Shown for each boring included in the stratigraphic analysis are a vertical series of colored blocks which correspond to boring log lithology and a continuous data curve (in red or as a scan of a paper document, which corresponds to the gamma log). These colored blocks represent vertical grain size distribution and are the basis for the correlations between the data points.

The color coded blocks correspond to the graphic grainsize scale as shown in the cross-sections' keys. The width of the block increases with relative grainsize. Block color indicates the textural classification of the sediment (e.g., yellow for sand, green for silt, blue for clay) as written in the field notes of the core logging geologist (see the cross section keys for further definition).

Logs of natural gamma emissions are a common proxy for grainsize. They typically are used as a correlation aide because repetitive spatially extensive trends in grainsize are easily identified visually when curves are examined along a given section. In non-granitic aquifer material, the chemistry of minerals found in clays result in higher concentrations of gamma emitting anions as opposed to the quartz, heavy minerals, and lithic fragments that generally predominate the coarser size fractions. Thus, peaks in the gamma logs can be indicative of clay layers and in general as gamma count per second increases, the grainsize decreases. Gamma logs should always be "calibrated" by comparing side by side with a lithologic log at representative locations. Good agreement between gamma logs and lithology logs were noted in the data points used for the ESS sections at Bethpage.




The previously established general hydrostratigraphy at Bethpage consists of the basal Raritan confining unit, the Magothy aquifer, and the shallow glacial aquifer. The stratigraphy shown in the sections presented in this technical memo is consistent with this general model but additionally shows the Magothy to consist of basal zone gravel-rich channel fills (orange in sections); extensive, planar marine clays (thin units shown in grey and dark green); and silty sands of inter-distributary and delta front origins (shown in tan). Additionally, an erosional incision into the lower delta plain sediments is observed throughout the site (portrayed in sections as a wavy solid black line). Above this, the Magothy sediments are more likely estuarine "incised valley fill" as indicated by the more heterogeneous gamma ray character. In some locations, such as VPB139 on section A-A', there appears to be clear lithologic control on contaminant distribution within the estuarine facies where the higher TCE and PCE concentrations occur in the coarser lithologic zones.

The depositional axis of the incised valley fill likely trends north-south/southeast. The incision is clearly indicated on all sections via the correlation of a prominent clay layer shown in sections in dark green. Where this clay is missing in the gamma logs, it is likely that it was eroded during a lowstand of sea level. Additionally, while relatively planar in their geometry, the major units dip gently south-south east. This is an important geologic characteristic to consider when comparing analytical results because hydrologic zones separated by thin confining layers within the Magothy may be accessed by screens of similar depth.

One of the most important benefits of the ESS approach is to develop and refine the CSM. ESS facilitates an understanding of the geology governing groundwater occurrence and movement, and provides an element for refining the approaches for assessment and remediation. The ESS results from this effort suggest that a modern analog (a modern geological setting that allows an understanding of the ancient environment) for the Magothy depositional environments is the Mackenzie River Delta, shown in Figure 5. Basal gravel zones are represented by the braided river deposits of the Toklat River, Alaska, in Figure 6.

# Environmental Sequence Stratigraphy Cross Section

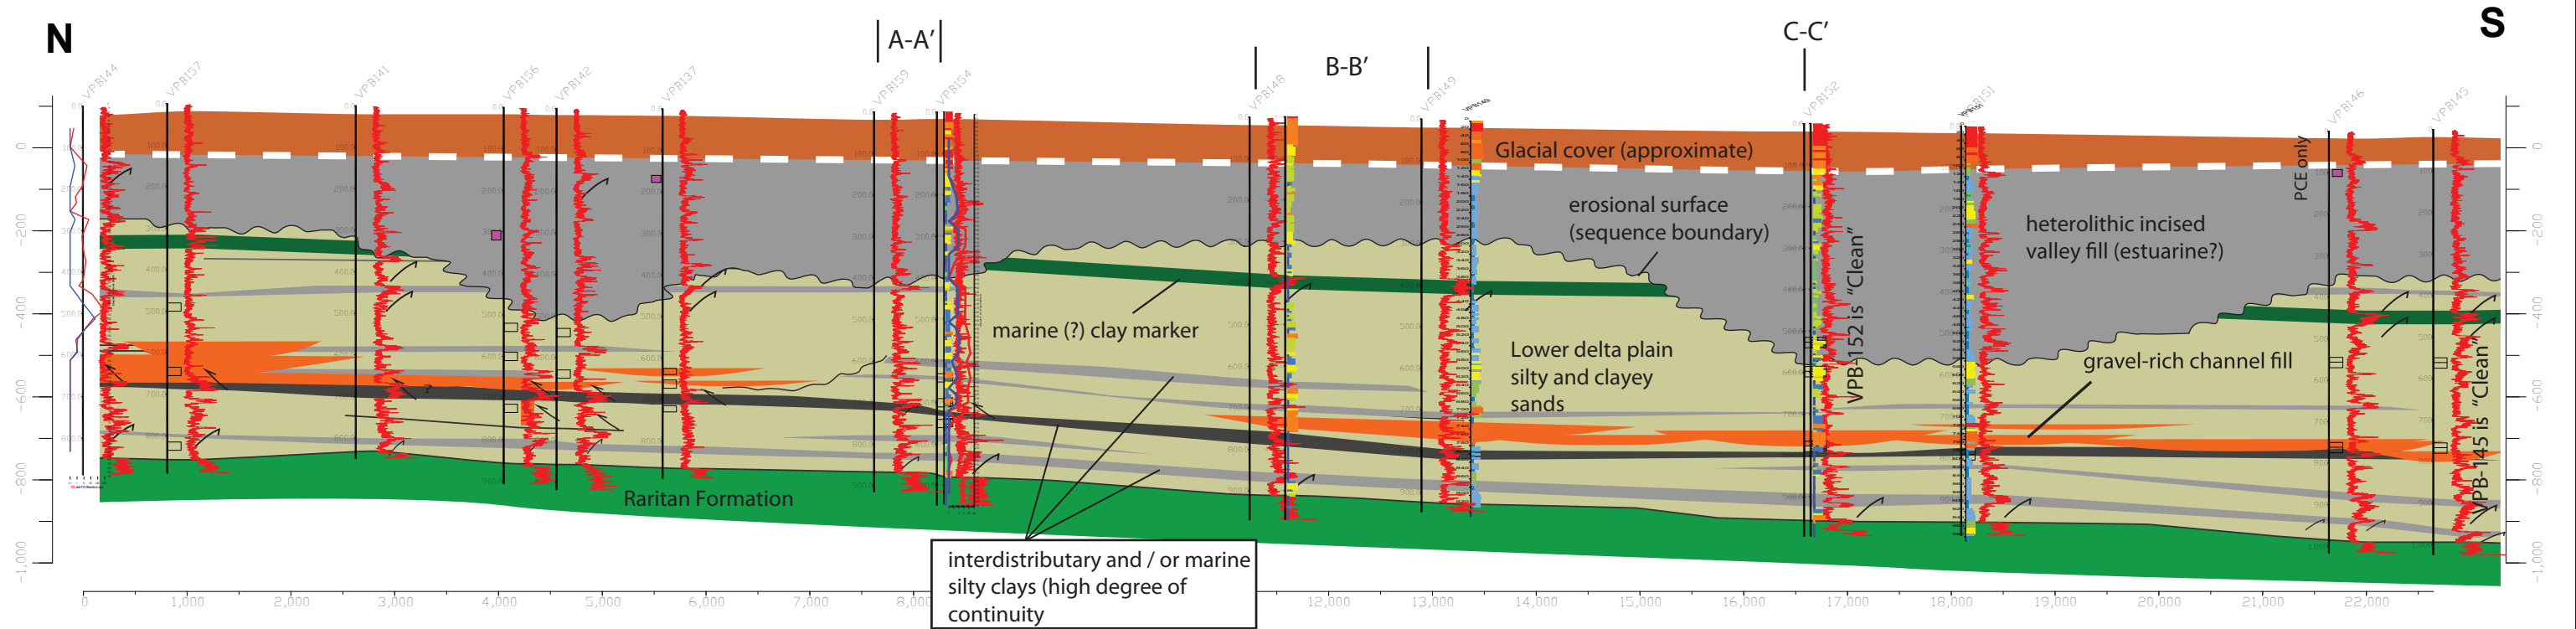

## GRAIN SIZE LOG INDEX\*

\* not all grainsize categories shown in the comprehensive key are present at the site. Site sediments are predominately fine (clays, sandy clays, silts, and fine to medium sand)

Clay	Silty Sand (Medium Sand with 10-20% Fines)
Clay with 10% Sand	Clayey Sand (Medium Sand with 10-20% Fines)
Clay with 20% Sand	Fine Sand with Fine Gravel
Clay with 30% Sand	Fine Sand with Medium Gravel
Clay with 40% Sand	Fine Sand with Coarse Gravel
Clay with Fine Gravel	Medium Sand
Clay with Medium Gravel	Silty Sand (Coarse Sand with 50% Fines)
Clay with Coarse Gravel	Clayey Sand (Coarse Sand with 50% Fines)
Silt	Silty Sand (Coarse Sand with 40% Fines)
Silt with 10% Sand	Clayey Sand (Coarse Sand with 40% Fines)
Silt with 20% Sand	Silty Sand (Coarse Sand with 30% Fines)
Sandy Silt	Clayey Sand (Coarse Sand with 30% Fines)
Silty Sand	Silty Sand (Coarse Sand with 10-20% Fines)
Silty Sand	Clayey Sand (Coarse Sand with 10-20% Fines)
Silty Sand (Fine Sand with 40% Fines)	Medium Sand with Fine Gravel
Clayey Sand (Fine Sand with 40% Fines)	Medium Sand with Medium Gravel
Silty Sand (Fine Sand with 30% Fines)	Medium Sand with Coarse Gravel
Clayey Sand (Fine Sand with 30% Fines)	Coarse Sand
Silty Sand (Fine Sand with 10-20% Fines)	Coarse Sand with Fine Gravel
Clayey Sand (Fine Sand with 10-20% Fines)	Coarse Sand with Medium Gravel
Gravelly Silt (Silt with Fine Gravel)	Coarse Sand with Coarse Gravel
Gravelly Silt (Silt with Medium Gravel)	Clayey/Silty Gravel (Fine gravel with clay/silt)
Gravelly Silt (Silt with Coarse Gravel)	Clayey/Silty Gravel (Medium gravel with clay/silt)
Fine Sand	Clayey/Silty Gravel (Coarse gravel with clay/silt)
Silty Sand (Medium Sand with 50% Fines)	Sandy Gravel (Fine Gravel with Sand)
Clayey Sand (Medium Sand with 50% Fines)	Sandy Gravel (Medium Gravel with Sand)
Silty Sand (Medium Sand with 40% Fines)	Sandy Gravel (Coarse Gravel with Sand)
Clayey Sand (Medium Sand with 40% Fines)	Fine Gravel
Silty Sand (Medium Sand with 30% Fines)	Medium Gravel
Clayey Sand (Medium Sand with 30% Fines)	Coarse Gravel




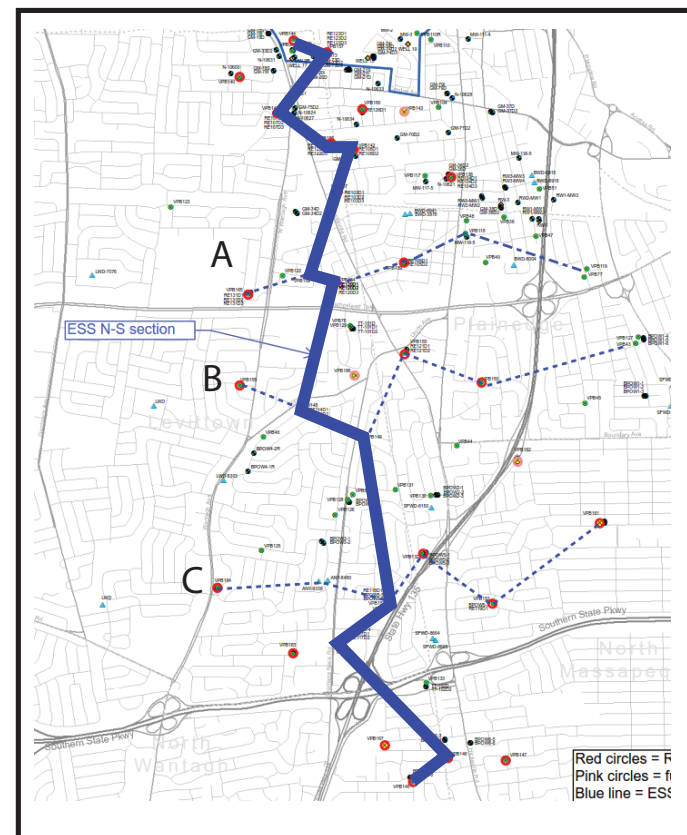




Figure 1. Cross Section N-S



**Figure 2. Cross Section A-A'**

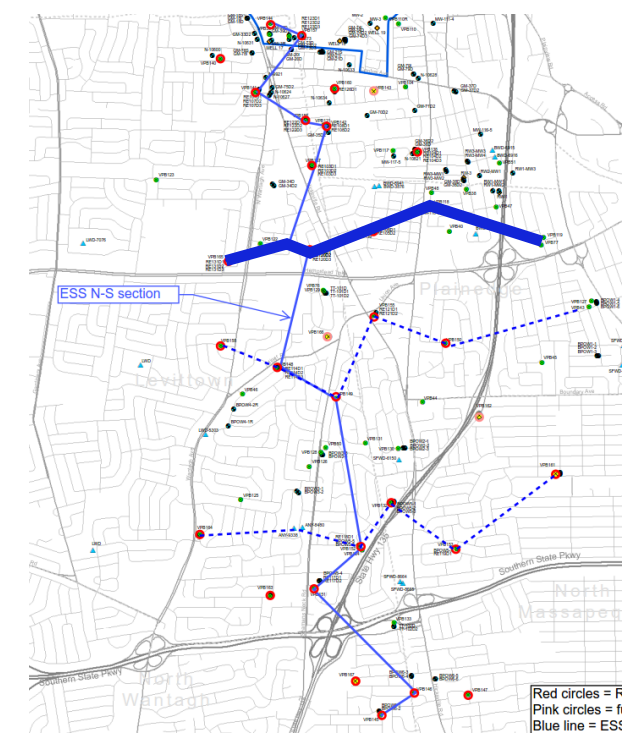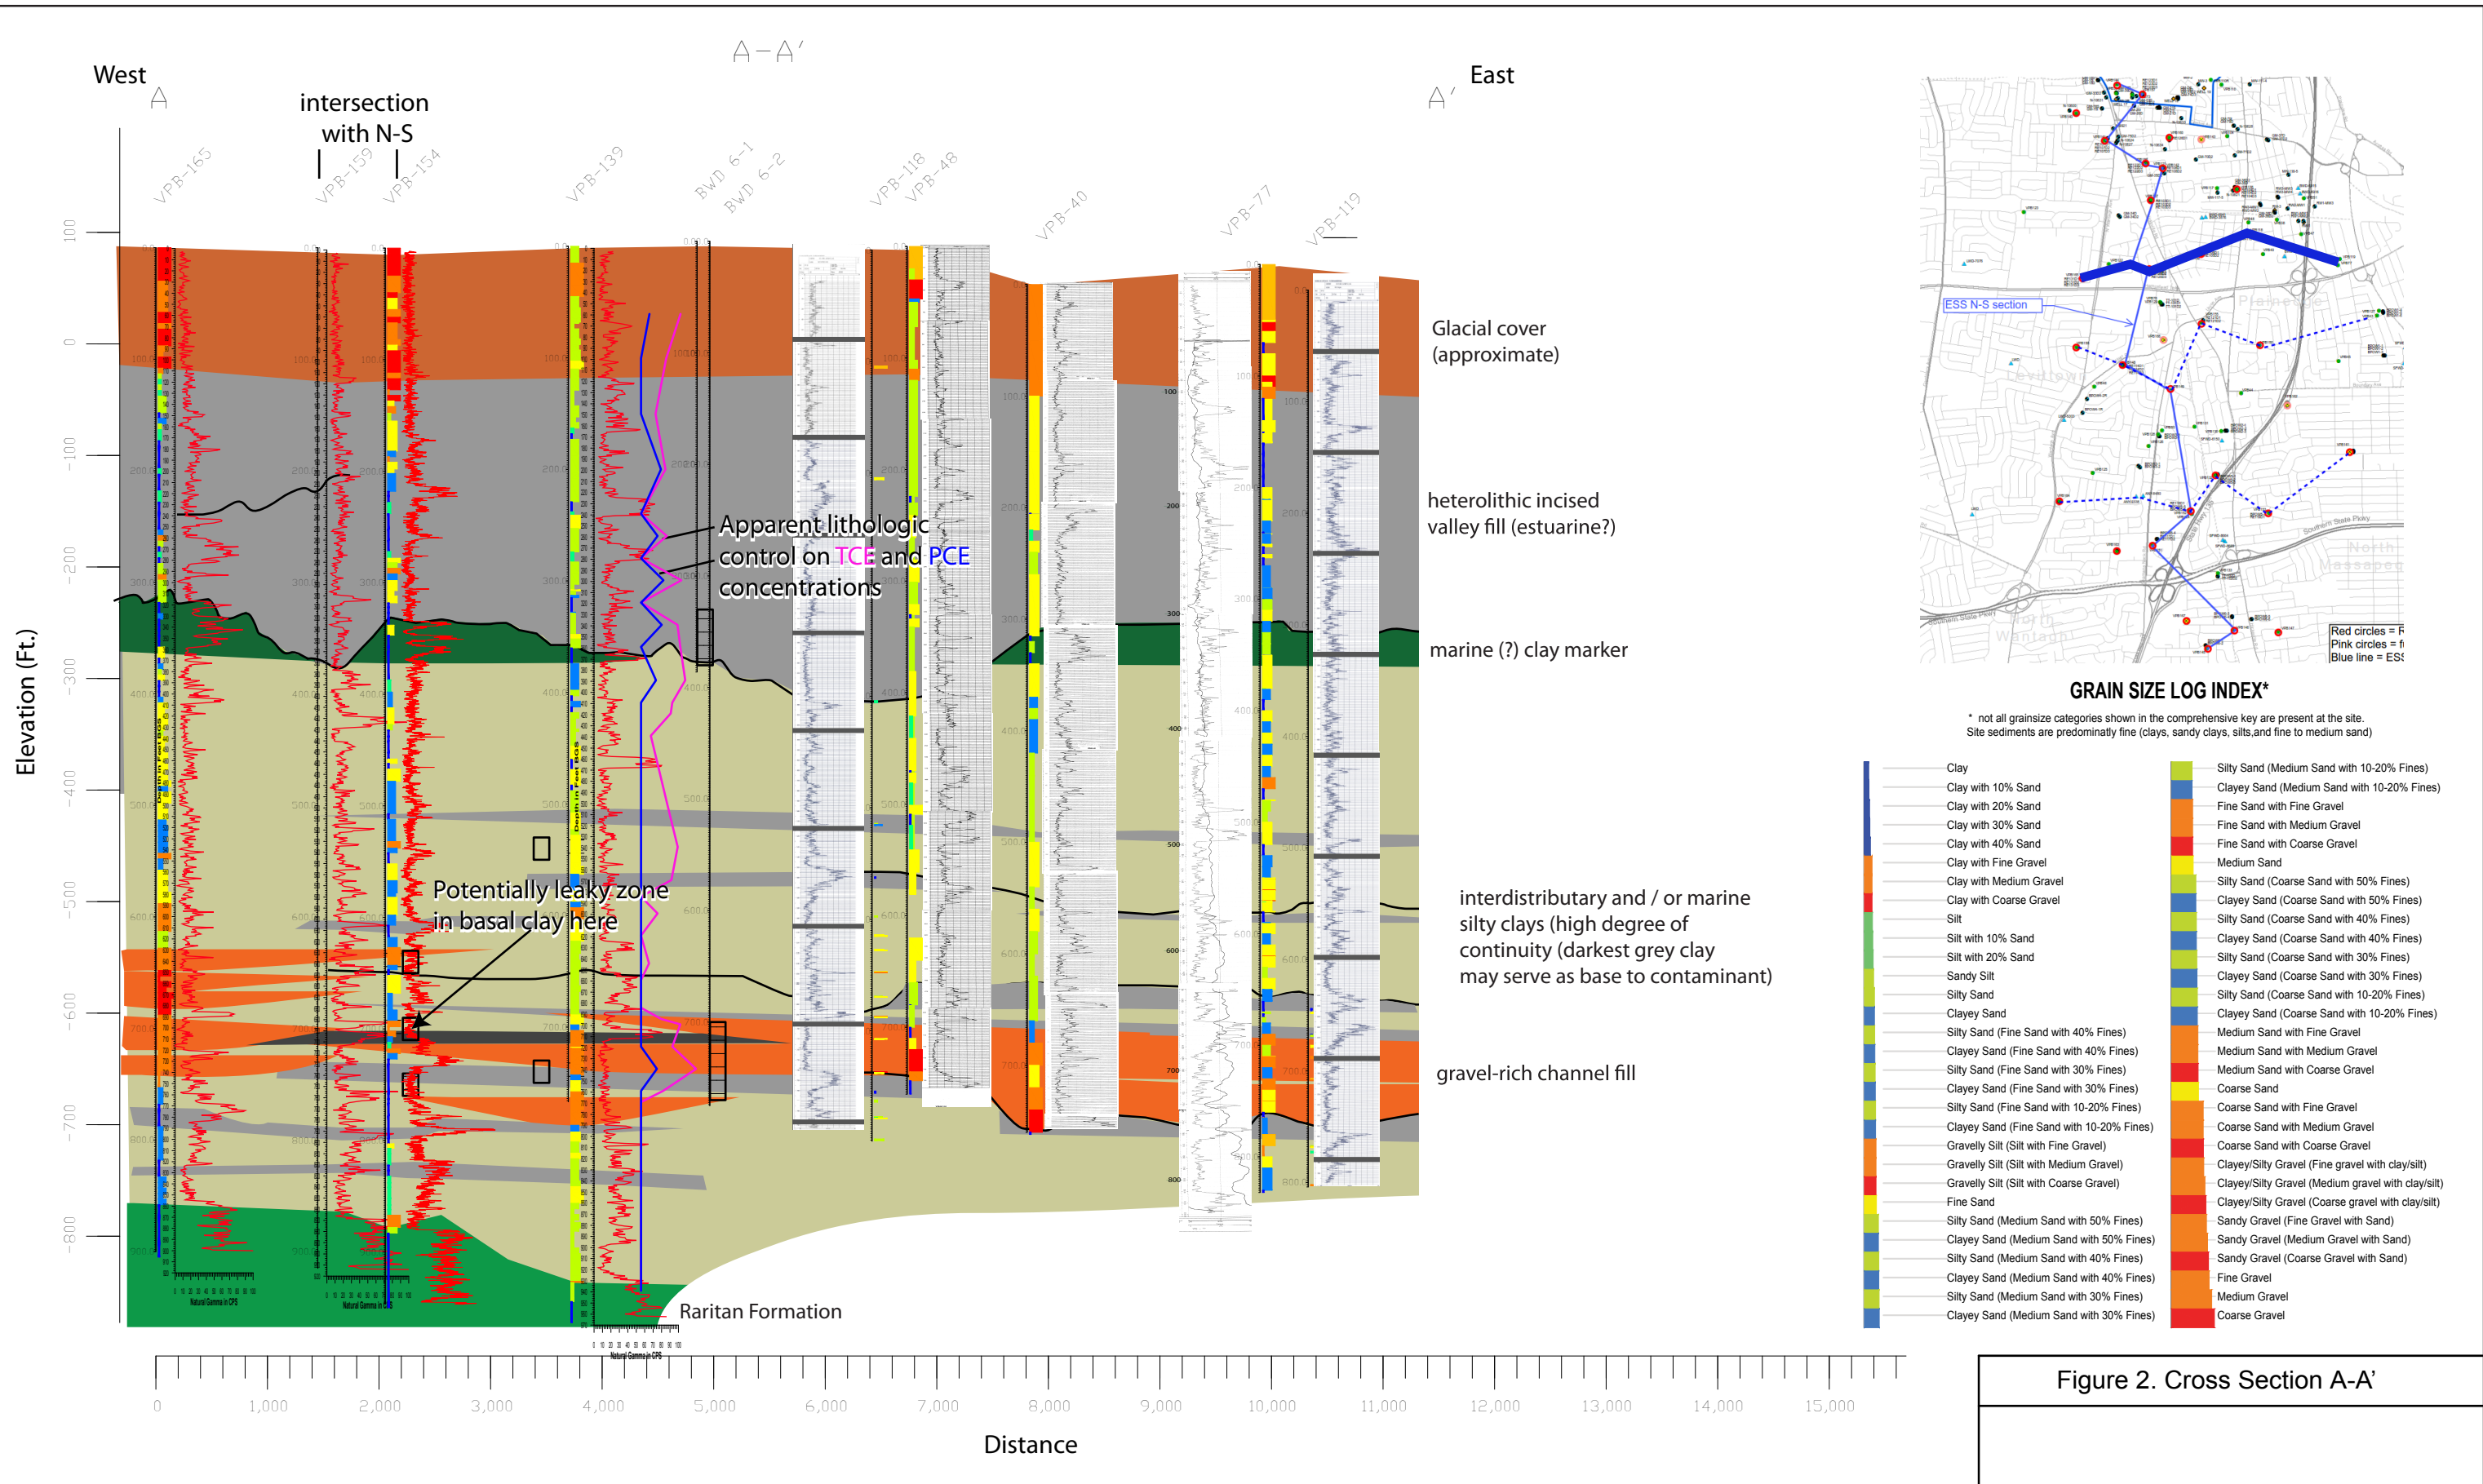

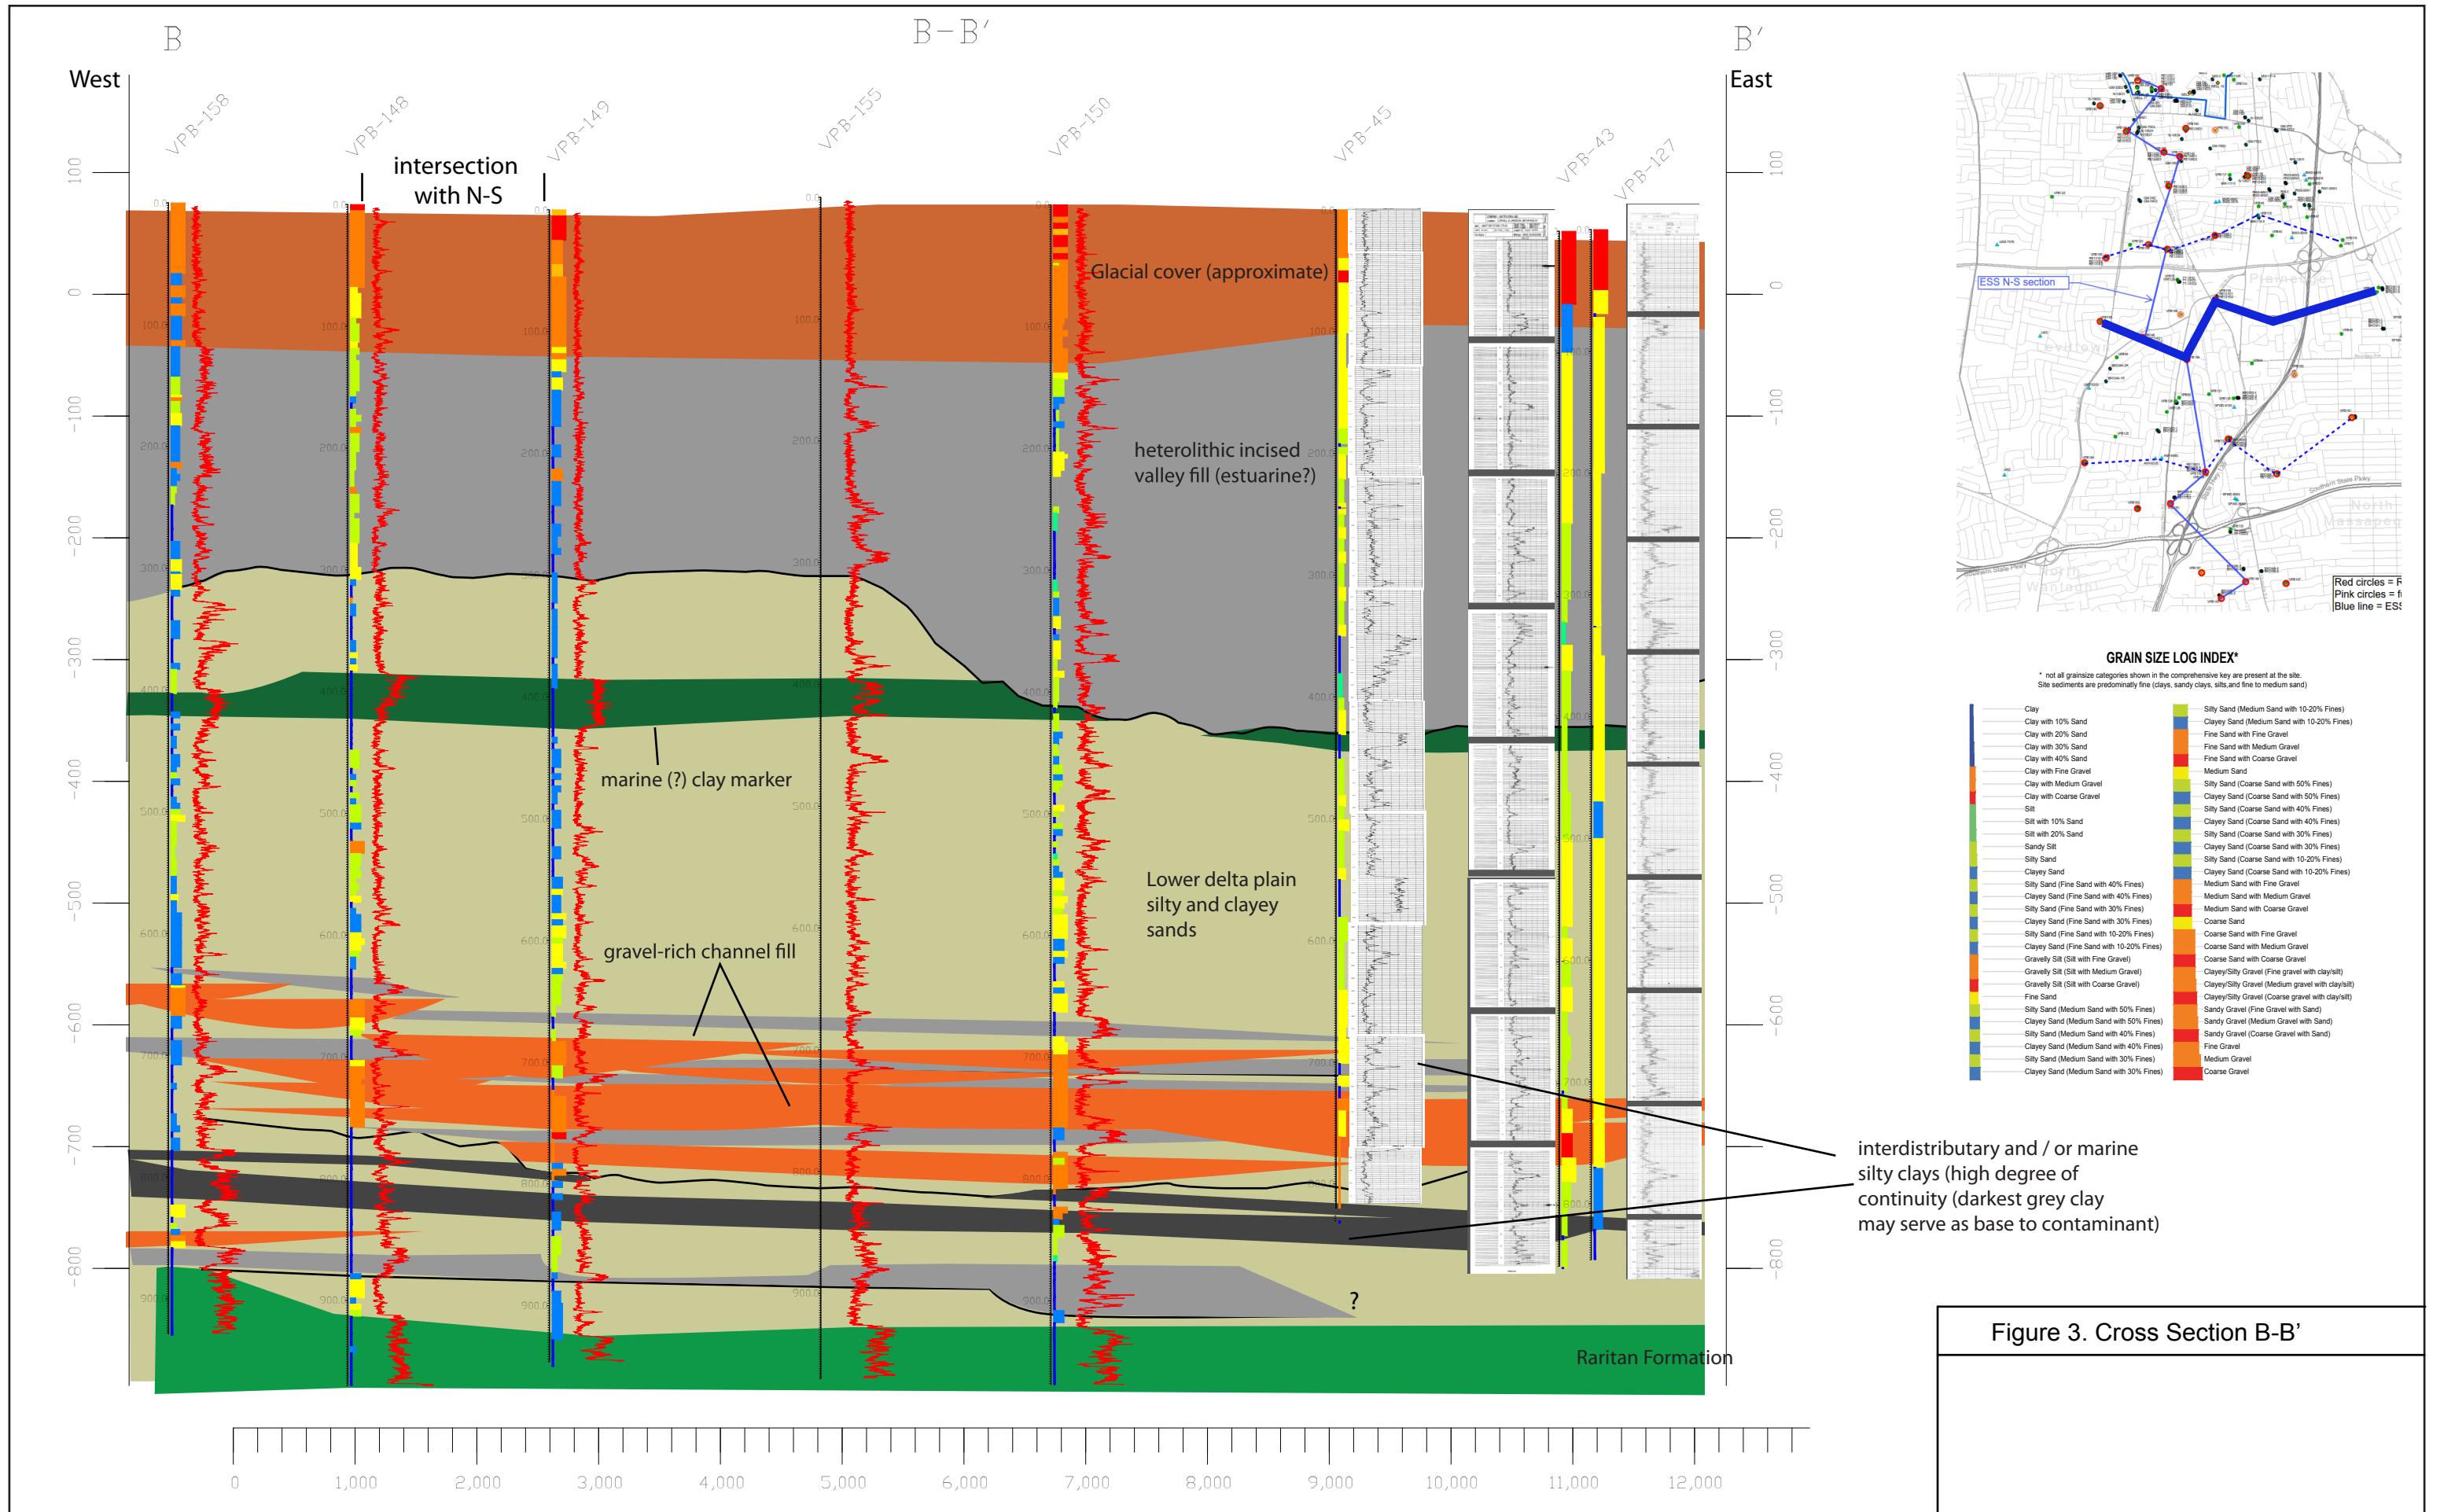

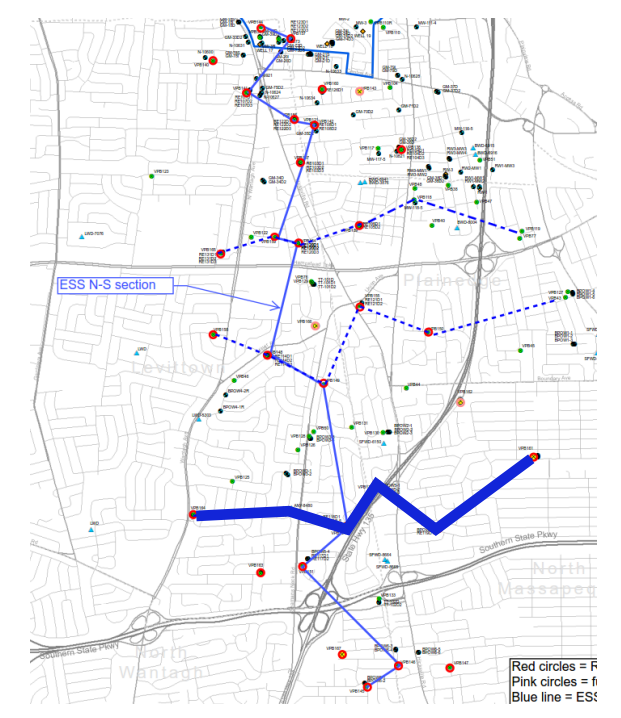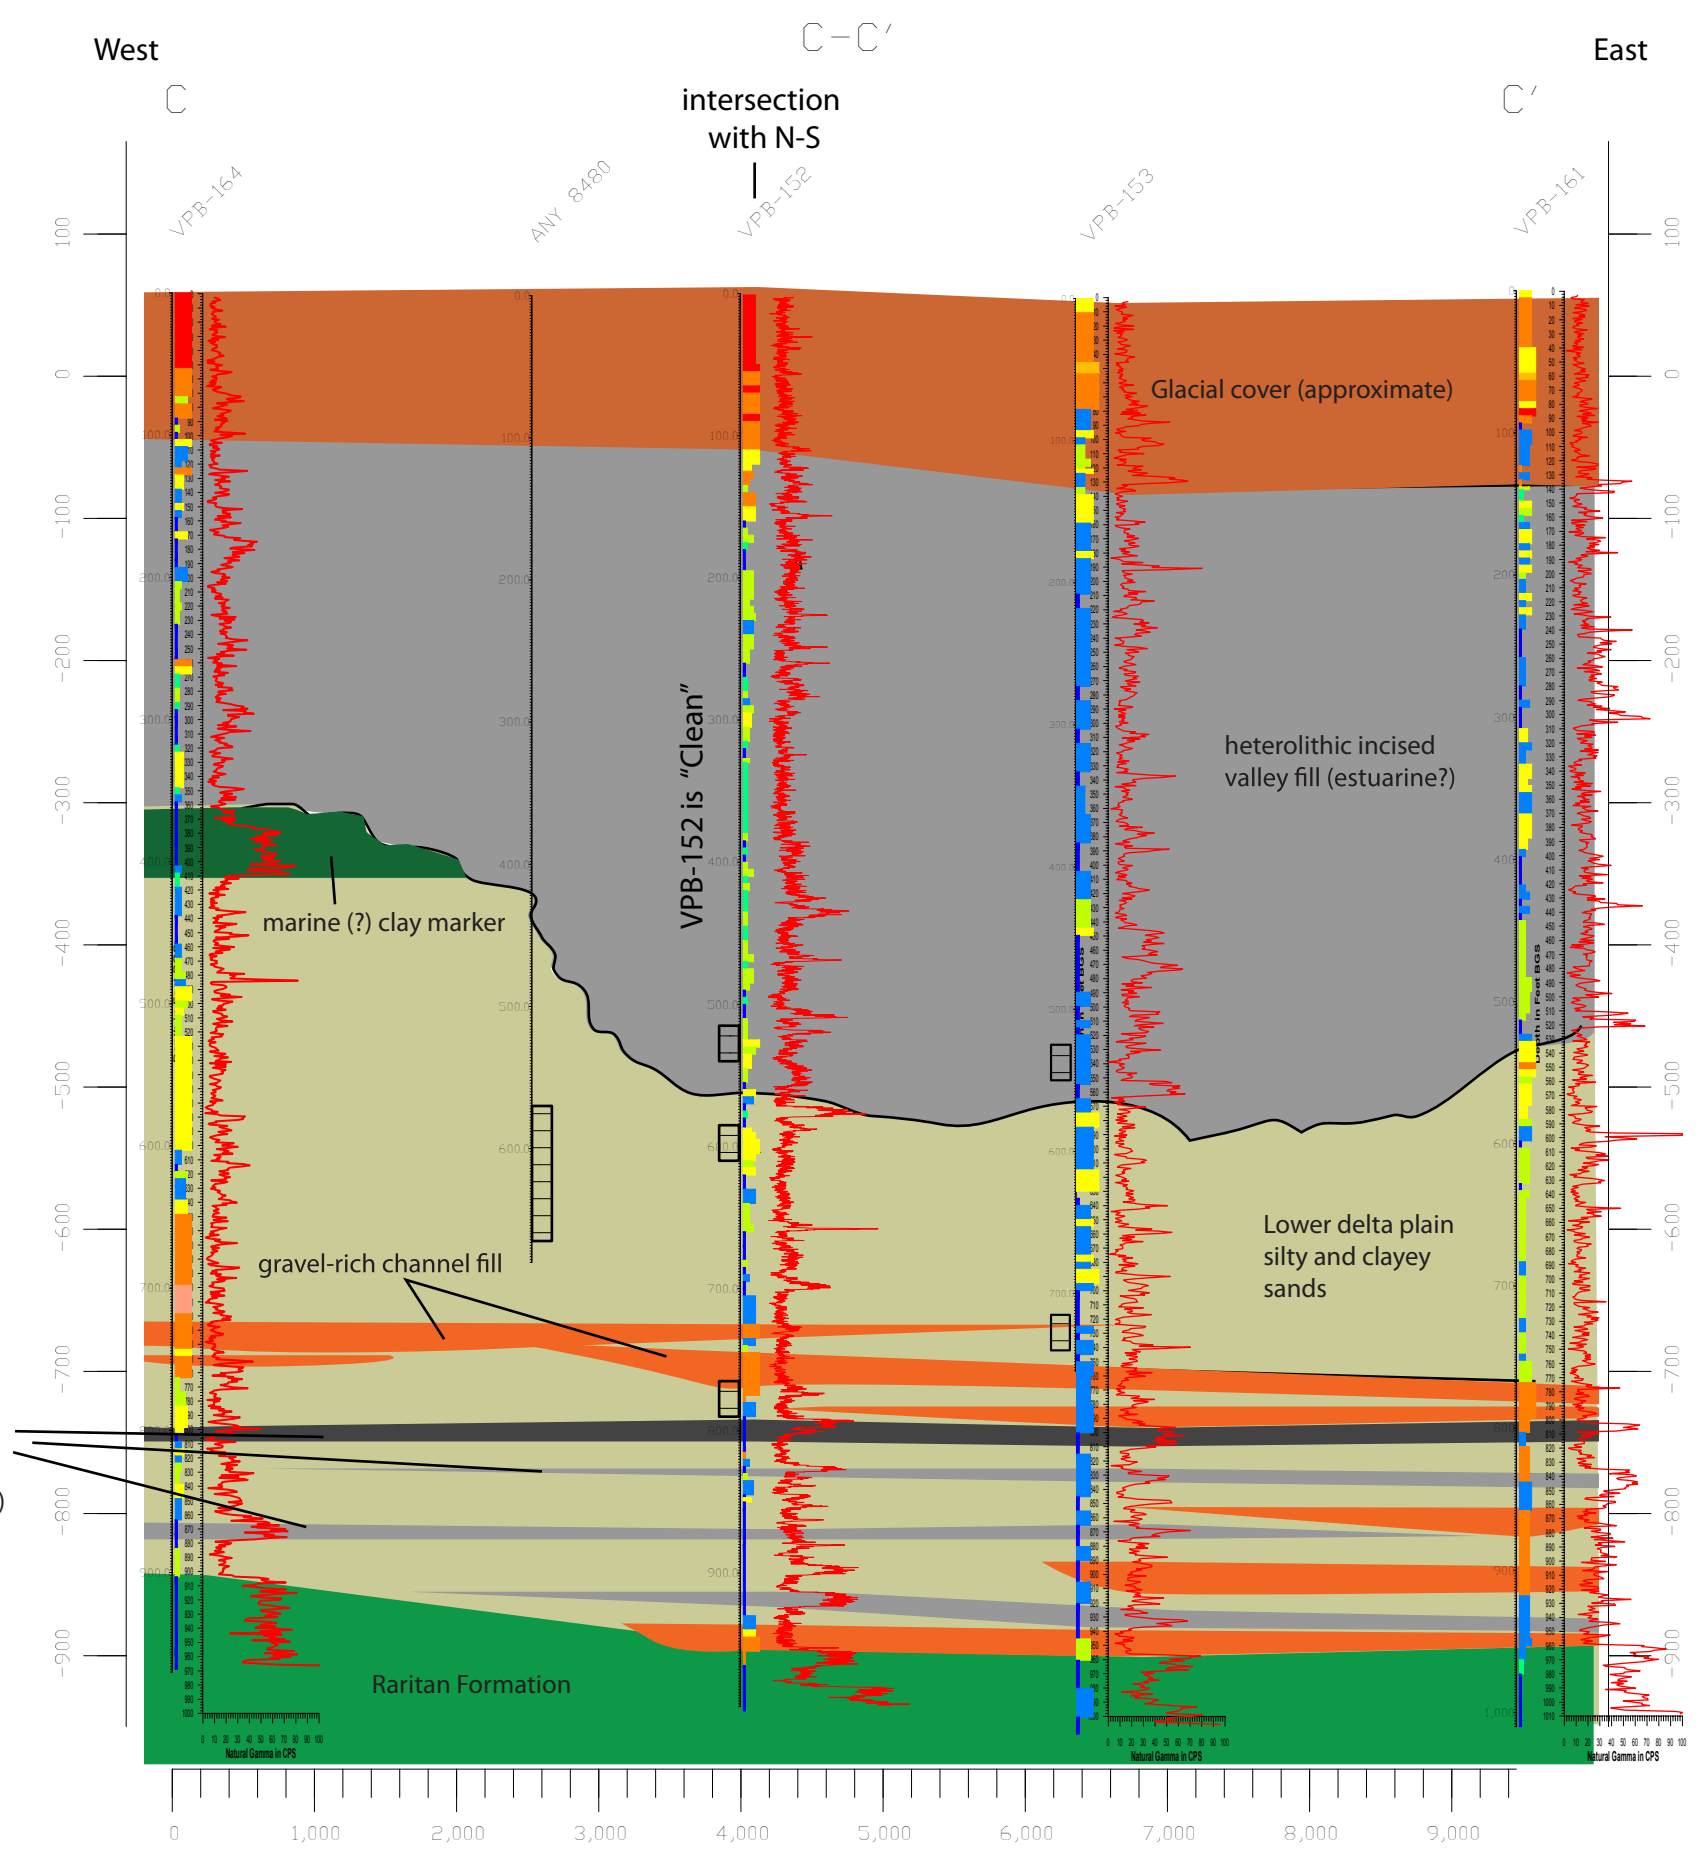

**GRAIN SIZE LOG INDEX\***

\* not all grainsize categories shown in the comprehensive key are present at the site. Site sediments are predominately fine (clays, sandy clays, silts, and fine to medium sand)

- |   |  |
|---|--|
| Clay                                      | Silty Sand (Medium Sand with 10-20% Fines)         |
| Clay with 10% Sand                        | Clayey Sand (Medium Sand with 10-20% Fines)        |
| Clay with 20% Sand                        | Fine Sand with Fine Gravel                         |
| Clay with 30% Sand                        | Fine Sand with Medium Gravel                       |
| Clay with 40% Sand                        | Fine Sand with Coarse Gravel                       |
| Clay with Fine Gravel                     | Medium Sand  |
| Clay with Medium Gravel                   | Silty Sand (Coarse Sand with 50% Fines)            |
| Clay with Coarse Gravel                   | Clayey Sand (Coarse Sand with 50% Fines)           |
| Silt                                      | Silty Sand (Coarse Sand with 40% Fines)            |
| Silt with 10% Sand                        | Clayey Sand (Coarse Sand with 40% Fines)           |
| Silt with 20% Sand                        | Silty Sand (Coarse Sand with 30% Fines)            |
| Sandy Silt                                | Clayey Sand (Coarse Sand with 30% Fines)           |
| Silty Sand                                | Silty Sand (Coarse Sand with 10-20% Fines)         |
| Clayey Sand                               | Clayey Sand (Coarse Sand with 10-20% Fines)        |
| Silty Sand (Fine Sand with 40% Fines)     | Medium Sand with Fine Gravel                       |
| Clayey Sand (Fine Sand with 40% Fines)    | Medium Sand with Medium Gravel                     |
| Silty Sand (Fine Sand with 30% Fines)     | Medium Sand with Coarse Gravel                     |
| Clayey Sand (Fine Sand with 30% Fines)    | Coarse Sand  |
| Silty Sand (Fine Sand with 10-20% Fines)  | Coarse Sand with Fine Gravel                       |
| Clayey Sand (Fine Sand with 10-20% Fines) | Coarse Sand with Medium Gravel                     |
| Gravelly Silt (Silt with Fine Gravel)     | Coarse Sand with Coarse Gravel                     |
| Gravelly Silt (Silt with Medium Gravel)   | Clayey/Silty Gravel (Fine gravel with clay/silt)   |
| Gravelly Silt (Silt with Coarse Gravel)   | Clayey/Silty Gravel (Medium gravel with clay/silt) |
| Fine Sand                                 | Clayey/Silty Gravel (Coarse gravel with clay/silt) |
| Silty Sand (Medium Sand with 50% Fines)   | Sandy Gravel (Fine Gravel with Sand)               |
| Clayey Sand (Medium Sand with 50% Fines)  | Sandy Gravel (Medium Gravel with Sand)             |
| Silty Sand (Medium Sand with 40% Fines)   | Sandy Gravel (Coarse Gravel with Sand)             |
| Clayey Sand (Medium Sand with 40% Fines)  | Fine Gravel  |
| Silty Sand (Medium Sand with 30% Fines)   | Medium Gravel                                      |
| Clayey Sand (Medium Sand with 30% Fines)  | Coarse Gravel                                      |

interdistributary and / or marine silty clays (high degree of continuity (darkest grey clay may serve as base to contaminant))

**Figure 4. Cross Section C-C'**





**Figure 5. Mackenzie River Delta Depositional Environment**

Source: Thermal Emission and Reflection Radiometer image from NASA's TERRA satellite, August 4, 2005, Mackenzie River, Canada. Image from GSFC/METI/ERSDAC/JAROS and the US/Japan ASTER Science Team. <http://earthobservatory.nasa.gov/IOTD/view.php?id=8320>





**Figure 6. Braided River Depositional Environment**

Source: East Fork Toklat River, Alaska Range, Denali National Park <https://pubs.usgs.gov/of/2004/1216/b/b.html>

