

FRANKLIN CLEANERS GROUNDWATER EXTRACTION AND TREATMENT SYSTEM

Latitude 40.688°, Longitude 73.627°

REPORT TITLE

Site Management Quarterly
Report No. 55

REPORTING PERIOD

March 2018 through May 2018

CLIENT

New York State Department of
Environmental Conservation

Payson Long, Project Manager
Payson.Long@dec.ny.us

CONSULTANT

D&B Engineers and Architects,
P.C.

Matthew Hoskins, P.G., Project
Manager
email: MHoskins@db-eng.com

AUGUST 2018



NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION

Division of Environmental Remediation

625 Broadway, 12th Floor, Albany, New York 12233

Site

NYSDEC Site No. 130050, Franklin Cleaners Site Groundwater Extraction and Treatment System Village of Rockville Centre, Town of Hempstead, Nassau County, New York

Project Background and Site Description



The Franklin Cleaners groundwater extraction and treatment system (GWE&TS) was installed to recover and treat the “leading edge” of a chlorinated solvent-contaminated groundwater plume emanating from the former Franklin Cleaners dry cleaner site, located approximately one mile upgradient of the GWE&TS, in the Village of Hempstead, Nassau County, New York. The groundwater plume is primarily composed of tetrachloroethene (PCE). The Franklin Cleaners GWE&TS was put into operation in September 2004. Refer to [Figure 1](#) for a site location map depicting the treatment system location.

Groundwater Extraction and Treatment System Overview



The GWE&TS consists of two 6-inch diameter wells screened approximately 75 to 90 feet below grade. Extracted groundwater is conveyed via underground piping to a low-profile stacked-tray air stripper located in the GWE&TS building. The treated groundwater is discharged from the air stripper to a wet well equipped with two series-configured submersible pumps, which convey the treated water via underground piping to a Nassau County Department of Public Works storm sewer manhole in accordance with all applicable discharge standards. Exhaust gas from the air stripper was treated utilizing two series-configured granular activated carbon (GAC) vessels; however, based on historic low contaminant concentrations detected in the air stripper exhaust gas, the air stripper exhaust piping was reconfigured to bypass the GAC vessels and

discharge exhaust gas directly to the atmosphere in June 2011, per the direction of the NYSDEC. The GWE&TS is equipped with instrumentation and controls which allow for automated startup and operation, and an auto dial alarm notification system. Refer to [Figure 2](#) for an “as-built” treatment system layout diagram. In accordance with recommendations in Site Management Quarterly Reports and the 2016 Periodic Review Report for the site the NYSDEC directed that the GWE&TS be shutdown in July 2017 to evaluate if continued operation of the GWE&TS is necessary. Refer to [Attachment A](#) for a memorandum regarding the prolonged system shutdown.

Regulatory Requirements/Cleanup Goals

Site-specific remedial goals have been established through the remedy selection process as defined in 6 NYCRR Part 375-1.10, and are documented in the Record of Decision (ROD), dated March 1998. The site-specific remedial goals outlined in the March 1998 ROD are provided in [Attachment B](#). The overall goal is to meet all appropriate Standards, Criteria, and Guidance (SCGs) and to be protective of human health and the environment. Implementation of the GWE&TS is specifically focused on the following goals:



- Reduce, control, or eliminate contaminated media to the extent practicable.
- Eliminate the potential for exposure to contaminated groundwater.
- Provide for attainment of SCGs for groundwater, soil and indoor air within the limits of the affected area, to the extent practical.

Treatment System Operational Status

In accordance with recommendations in Site Management Quarterly Reports and the 2016 Periodic Review Report for the site, the NYSDEC directed that the GWE&TS be shutdown in July 2017 to evaluate if continued operation of the GWE&TS is necessary. Refer to [Attachment A](#) for a memorandum regarding the prolonged system shutdown.

Treatment System Operation and Maintenance

As the GWE&TS has been shutdown since July 17, 2017, to evaluate if continued operation of the GWE&TS is necessary, routine system maintenance activities were not completed. Non-routine maintenance and site facility maintenance work was not completed on site either.

Non-Routine Treatment System Maintenance

Non-routine maintenance activities were not complete throughout this reporting period.

Facility Maintenance

Facility maintenance activities were not completed this reporting period.

Groundwater Monitoring Summary

As per the NYSDEC-approved sampling frequency, seven groundwater monitoring wells (ASMW-1 through ASMW-7) and two extraction wells (EW-1 and EW-2) were sampled during this reporting period on April 25, 2018. These wells were sampled to determine groundwater quality at and in the vicinity of the leading edge of the groundwater contaminant plume associated with the Site. Groundwater samples were collected from three groundwater monitoring wells (ASMW-1 through ASMW-3) and two extraction wells (EW-1 and EW-2) located in close proximity to the leading edge of the Franklin Cleaners plume and four groundwater monitoring wells located downgradient of the leading edge of the plume (ASMW-4 through ASMW-7).

Note that groundwater monitoring well ASMW-4 acts as an early warning or “sentinel” well for a cluster of Village of Rockville Centre public supply wells located downgradient of the treatment system building. The locations of the groundwater monitoring wells are depicted on [Figure 3](#).

Groundwater Monitoring Well Condition Summary:

All of the sampled groundwater monitoring wells were found to be accessible during the groundwater monitoring/sampling event conducted on April 25, 2018. Refer to [Attachment C](#) for site activities logs, as prepared by the NYSDEC Remedial Services Contractor for this reporting period. All groundwater monitoring wells were located as indicated on the site map and the concrete well pads (where applicable), protective casings, surface seals, well IDs, PVC well risers, well plugs and locks were observed to be present and in good condition, with the exception of the following:

- The well IDs for ASMW-5 and ASMW-6 are missing;
- Bolts are missing or broken from at ASMW-1, ASMW-2 and ASMW-4; and,
- A lock is missing at ASMW-4 and ASMW-5.

Field inspection logs for groundwater monitoring wells assessed during this period are provided in [Attachment D](#). It should be noted that groundwater samples from extraction wells EW-1 and EW-2 are collected from sample taps located within the GWE&TS building; therefore, field inspection logs are not completed for these wells.





Groundwater Monitoring Results Summary:

A headspace reading was collected at each of the sampled groundwater monitoring wells immediately after the removal of the well plugs utilizing a PID. VOC concentrations within the headspace of all monitoring wells ranged from non-detect to 2.2 ppm.

Below is a detailed summary of PCE concentrations in site groundwater. Refer to [Attachment E](#) for analytical data results. A figure depicting the current PCE concentrations in groundwater is provided as [Figure 4](#).

Groundwater Monitoring Wells - PCE Concentrations

	Leading Edge Monitoring Wells			Sentinel Monitoring Wells				Extraction Wells		Class GA Groundwater Standard
Monitoring Well	ASMW-1	ASMW-2	ASMW-3	ASMW-4	ASMW-5	ASMW-6	ASMW-7	EW-1	EW-2	
Current Reporting Period	20 ug/l	3.3 ug/l	ND	ND	ND	ND	ND	2.7 ug/l	45 ug/l	5.0 ug/l
Previous Reporting Period	19 ug/l	5.8 ug/l	ND	ND	ND	ND	ND	2.1 ug/l	64 ug/l	5.0 ug/l
2-Year PCE Trend Analysis ⁽¹⁾	Decreasing	Stable	Stable	Stable	Stable	Stable	Stable	Stable	Decreasing	

ND: Constituent concentration below the analytical detection limit.
Red font denotes an exceedances of the Class GA Groundwater Standard.


In addition to PCE, acetone, 1,1-dichloroethane, 1,1-dichloroethene, chloroform, MIBK and MTBE were detected in one or more groundwater monitoring wells during this reporting period; however, these compounds were detected at concentrations well below their respective Class GA Standards.

1. Trend analysis is calculated based on an increase or decrease of 5.0 ug/l over a 2-year time frame.

Monitoring Well ASMW-1 PCE Concentration Trend Line



Extraction Well EW-2 PCE Concentration Trend Line

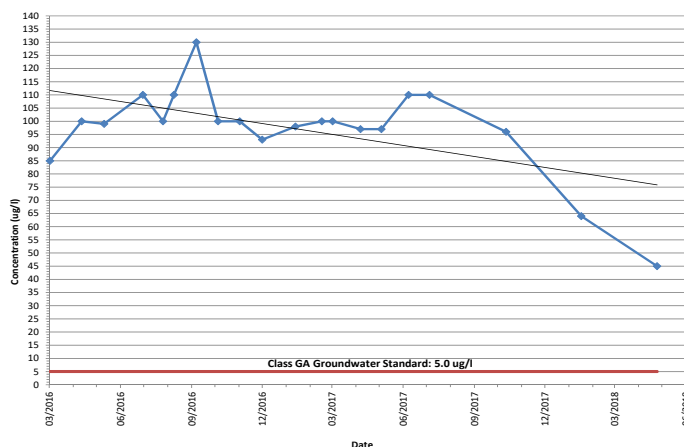

Site-specific PCE concentrations in wells sampled during this reporting period were generally slightly higher than, or consistent with, those detected during the previous reporting period. PCE was detected in excess of the Class GA Standard values of 5.0 ug/l in one of the seven groundwater monitoring wells and one extraction well sampled. PCE was detected in excess of the Class GA Standard value in ASMW-1 and EW-2 at concentrations of 20 ug/l and 45 ug/l, respectively. Concentrations of PCE have been slightly irregular over the last 2 years in monitoring well ASMW-1 (ranging from a minimum of 5.3 ug/l in October 2017, to a maximum of 47 ug/l, detected in January 2016, July 2016 and April 2017); however, these wells have exhibited a decreasing trend. PCE concentrations in extraction well EW-2 have been slightly irregular, over the last 2 year period (ranging from a minimum of 45 ug/l in April 2018 of this reporting period, to a maximum of 130 ug/l, detected in September 2016); however, the well exhibits a decreasing trend. Additionally, within monitoring wells ASMW-3 through ASMW-7 and extraction well EW-1, PCE has been detected at concentrations below the Class GA Standard of 5.0 ug/l over the last two year period. Monitoring wells ASMW-3 through ASMW-7 and extraction well EW-1 have exhibited stabilized concentration trends. It should be noted that although ASMW-2 has exhibited slightly elevated concentrations of PCE throughout previous reporting periods, PCE contaminant concentrations in samples collected from ASMW-2 have exhibited stable trends over the last two year period.





Data Validation:

All sample results have been reviewed by D&B and deemed valid and usable for environmental assessment purposes. Data Validation Checklists are presented in [Attachment F](#). Based on D&B's review, qualification of the data was necessary for the following analyses:

- Acetone and methylene chloride were detected in the method and/or trip blanks. Acetone was qualified as non-detect (UB) in the groundwater monitoring well sample collected from ASMW-5 on April 25, 2018.
- The percent recoveries (%Rs) were above the quality control (QC) limits for 1,1-dichloroethene, methylene chloride and trans-1,2-dichloroethene in the matrix spike (MS), matrix spike duplicate (MSD) and lab control sample (LCS) associated with all samples collected on April 25, 2018, as part of the quarterly groundwater sampling event. The contaminants were not detected above the reporting limit in the samples therefore qualification of the data was not necessary.
- The %Rs were above the QC limits for methylene chloride, 1,1-dichloroethene, trans-1,2-dichloroethene, trichlorofluoromethane and methyl acetate in the LCS associated with the Trip Blank. The contaminants were not detected above the reporting limit in the sample therefore qualification of the data was not necessary.

All analytical data have been submitted to the NYSDEC in the required EQulS format upon receipt of the data from the NYSDEC Remedial Services Contractor.

Findings and Recommendations

Findings:

- General: In accordance with recommendations for the site the NYSDEC directed that the GWE&TS be shutdown in July 2017, to evaluate if continued operation of the GWE&TS is necessary.
- Groundwater Monitoring Well Inspection/Sampling Summary:
 - All of the sampled groundwater monitoring wells were found to be accessible during the groundwater monitoring/sampling event conducted on April 25, 2018. All groundwater monitoring wells were located as indicated on the site map and the concrete well pads (where applicable), protective casings, surface seals, well IDs, PVC well risers, well plugs and locks were observed to be present and in good condition, with the exception of the following;
 - The well IDs for ASMW-5 and ASMW-6 are missing;
 - Bolts are missing or broken at ASMW-1, ASMW-2 and ASMW-4, and
 - A lock is missing at ASMW-4 and ASMW-5.
- Monitoring Well PCE Exceedances: PCE was detected at a concentrations of 20 ug/l, and 45 ug/l in groundwater samples collected from ASMW-1 and EW-2, exceeding the Class GA Standard of 5.0 ug/l, respectively. PCE concentrations in ASMW-1 have been slightly irregular, over the last 2 years (ranging from a minimum of 5.3 ug/l in October 2017, to a maximum of 47 ug/l, detected in January 2016, July 2016 and April 2017); however, have exhibited a decreasing trend. It should be noted that ASMW-2 has exhibited slightly elevated levels of PCE throughout previous reporting periods; however, have decreased below Class GA Standards this reporting period. ASMW-2 PCE contaminant concentrations have exhibited stable trends over the last two year period. PCE concentrations in extraction well EW-2 have been slightly irregular, over the last 2 year period (ranging from a minimum of 40 ug/l in April 2018, to a maximum of 130 ug/l, detected in September 2016); however, exhibits a decreasing trend. Additionally, within monitoring wells ASMW-3 through ASMW-7 and extraction well EW-1, PCE has been detected at concentrations below the Class GA Standard of 5.0 ug/l over the last two year period, as such monitoring wells ASMW-2 through ASMW-7 and extraction well EW-1 have exhibited stable concentration trends.



Recommendations:

- General Treatment System:
 - It is recommended that the GWE&TS continue to be shutdown to monitor the effect on contaminant concentrations within the existing monitoring well network located in the vicinity and downgradient of the GWE&TS. To assist in this evaluation it is further recommended that all wells be sampled on a quarterly basis (EW-1, EW-2 and ASMW-1 through 7).
 - It is recommended that the NYSDEC Remedial Services Contractor collect the required QA/QC samples as part of routine groundwater sampling.
 - D&B recommends that the NYSDEC Remedial Services Contractor record more clear and detailed descriptions of completed field activities and issues encountered.
 - D&B recommends that the NYSDEC Remedial Services Contractor replace the missing well IDs for ASMW-5 and ASMW-6, replace the missing or malfunctioning locks at each monitoring wells ASMW-4 and ASMW-5, and replace the missing manhole bolts at ASMW-1, ASMW-2 and ASMW-4.

Reclassification/Delisting Evaluation

The Site was originally listed as a Class 2 Inactive Hazardous Waste Site by the NYSDEC on June 17, 1993. Since this time, completion of the following project phases has occurred, as summarized below:

<i>Project Phases and Completion Dates</i>	
<i>Project Phase</i>	<i>Completion Date</i>
Remedial Investigation	03/1998
Remedial Design	02/2001
Groundwater Extraction and Treatment System Construction	07/2003 ⁽²⁾
Remedial Action (Source Area Remediation)	03/2007 ⁽¹⁾

1. Source area contaminated soil and groundwater were remediated with the Air Sparge/Soil Vapor Extraction (AS/SVE) system beginning in September 2003. The on-site AS/SVE system has successfully removed the contaminants from the vadose zone and greatly diminished groundwater contaminants to below detectable limits. Although confirmation soil samples met the required remedial goals, a subslab depressurization system replaced the on-site AS/SVE system in 2006 due to the detection of elevated vapor phase VOC concentrations in the basement level and below the basement floor slab.
2. Construction of the GWE&TS was completed in July 2003. The GWE&TS was placed into routine operation in September 2004 and currently continues to meet remedial objectives as originally designed.

Given the above, NYSDEC reclassified the Franklin Cleaners GWE&TS Site on December 11, 2012, pursuant to the requirements identified in 6 NYCRR §375-2.7, as a Class 4 Site since the NYSDEC determined that the site no longer presents a significant threat to public health and/or the environment based on remedial efforts performed to date and implementation of the July 2012 Site Management Plan (SMP). In addition, the NYSDEC has implemented a post-remedial indoor air study within the source area structures/buildings to verify current site conditions. Site delisting is not feasible at this time, as all remediation and post-remediation activities have not been satisfactorily completed.

Report Certification:

I have personally examined and am familiar with the information submitted in the referenced report. To the best of my knowledge and belief, and based upon my inquiry of those individuals immediately responsible for obtaining the information reported therein, I certify that the submitted information is true, accurate, and complete.





NYSDEC Site No. 130050, Franklin Cleaners Site
Groundwater Extraction and Treatment System

Site Management Quarterly Report No. 55 - March 2018 through May 2018

Project Director:



Richard M. Walka
Senior Vice President

8.31.18

Date

Project Manager:



Matthew Hoskins, P.G.
Project Manager

8/31/2018

Date



D&B ENGINEERS
AND
ARCHITECTS, P.C.