Shaw Environmental & Infrastructure Engineering of New York, P.C.

13 British American Boulevard Latham, New York 12110-1405 518-783-1996 (Phone) 518-783-8397 (Fax)

May 4, 2004

Mr. Jeff Dyber, P.E.
Environmental Engineer 2
New York State Department of Environmental Conservation
Division of Environmental Remediation
Bureau of Eastern Remedial Action
625 Broadway
Albany, New York 12233

RE: National Heatset Printing
Operation & Maintenance Report, March 2004
1 Adams Boulevard
Farmingdale, New York
NYSDEC Site 1-52-140

Dear Mr. Dyber:

This letter provides an overview of the ongoing operation of the soil vapor extraction (SVE) system for the National Heatset Printing Site in Farmingdale, New York (**Figure 1**) for the reporting period including March 2004. A site visit was performed by Shaw Environmental and Infrastructure Engineering of New York, P.C. (Shaw) personnel on March 30, 2004 in accordance with our contract with the NYSDEC.

System Operation

Operation of SVE system began on September 17, 2002. The SVE system has been operational for approximately 78% of the reporting period. The system operational data is summarized in **Table 1** and is presented as **Appendix A**.

The SVE blower operated at a flow of approximately 198 cfm and a vacuum of 70 inches of water column as observed during the site visit. A flow of 103 cfm and a vacuum of >50 inches of water column were observed at the extraction well. The extraction well and dilution valves were both 50% open at the beginning of the site visit. Volatile organic compound (VOC) and tetrachloroethene (PCE) concentrations from the extraction well were observed to be 34 and <10 ppm, respectively. The positioning of the well extraction and dilution air valves will be modified based on continued monitoring of VOC concentrations.

No water was collected from the knockout vessel during this reporting period. A small quantity of water has been collected during the previous reporting periods and placed in an accumulation

drum for storage until the drum has been filled, at which time proper characterization and disposal procedures will be followed.

VOC concentrations of 22 ppm and a PCE concentration of <10 ppm were observed at the VGAC influent port during the site visit. VOC concentrations of 22 ppm and a PCE concentration of <10 ppm were observed at the VGAC mid sampling port, while VOC concentrations of 24 ppm and a PCE concentration of <5 ppm were observed from the VGAC effluent sampling port during the site visit. A carbon change out has been scheduled for April 8, 2004. The dilution value position was adjusted to 100% open to minimize VOC air discharges. The value position will be returned to 50% open upon replacement of the vapor phase carbon.

Monitoring Probes

A vacuum of >2.0 inches of water column was observed at vapor monitoring point VP-1, 0.50 inches of water column was observed at vapor monitoring point VP-2, and 0.10 inches of water column was observed at VP-3 during the site visit. The vapor points will continue to be monitored during future site visits.

PCE Removal

The SVE system removed approximately 28 pounds of PCE from the extraction well during this reporting period and has removed approximately 2,311 pounds of PCE to date. A summary of the estimated PCE mass removal over time is presented in **Table 2**.

Air Discharge Monitoring

Shaw personnel collected a sample of the system effluent air for laboratory analyses during the site visit. The laboratory analysis revealed estimated trichloroethene and cis-1,2-dichloroethene concentrations of 1 mg/m³ and 2 mg/m³, respectively, and a PCE concentration of 77 mg/m³ in the system effluent sample. Analytical results are summarized in **Table 3** and the laboratory report of analyses is presented as **Appendix B**.

Field monitoring of the system discharge conducted during the site visit indicated concentrations of PCE and total VOCs of <5 ppm and 24 ppm, respectively. A summary of the field monitoring and laboratory air discharge monitoring results is presented as **Table 4**.

Conclusions and Recommendations

Based on the data collected from the SVE system during this reporting period, Shaw recommends continued operation of the SVE system at 1 Adams Boulevard. As site conditions change, adjustments will be made to optimize the system operation.

Please do not hesitate to contact me at 518-783-1996 with any questions you might have regarding this report.

Sincerely,

Shaw E & I Engineering of New York, P.C.

John A. Skaarup **Project Engineer**

Cc: File

Attachments: Tables

Figures

John O. Maary

Appendix A – Site Visit Documentation

Appendix B – Laboratory Report of Analyses

TABLES

TABLE 1 SUMMARY OF SOL VAPOR EXTRACTION SYSTEM READINGS NATIONAL HEATSET PRINTING 1 ADAMS BLVD., FARMINGDALE, NY

		Run Time Visit (Extraction Well						Influ	ent SVE				Mic	d GAC			Efflu	ent GAC	
	Run Time				Operation	Dilution	MW-F		Vacuum	Pre-	Pre-													
	Meter				Time Since	Valve	Valve	Air Flow	at Well	Dilution	Dilution	Blower	Vacuum					_						
	Reading				Last Visit	Position	Position (%	at Well	(inches	PID	PCE	Flow	(inches	Temp.	PID	PCE		Temp.	PID	PCE	Flow	Temp.	PID	PCE
Date	(hours)	Available		Actual	(%)	(% Open)	Open)	(scfm)	H2O)	(ppm)	(ppm)	(cfm)	H2O)	(°F)	(ppm)	(ppm)	(cfm)	(°F)	(ppm)	(ppm)	(cfm)	(°F)	(ppm)	(ppm)
9/18/2002			L.									SVE P		START										
9/30/2002	304	294	/	294	100%	100	50	34.5	5	2,000	500	256	25	107.2	1,015		317	102.3	0		290	89.5	0	
10/14/2002	642	343	1	338	99%	100	50	38	7	1,011	400	258	27		75.3	50			0				0	
11/19/2002	1508	882	1	866	98%	100	50	49	12	0	0	120	28	106	0	0	209	92	0		290	80.3	0	
12/4/2002		368	/							77	200				14.3	10			15.5	10			0	0
12/16/2002	2153	294	/	645	98%	100	50	36.5	10	560	200	253	28	92	46.4	50	302	60	3.4		340	53.9	0	
1/21/2003	3016	882	/	863	98%	100	50		-			70	52	98	0	0	220		0		220		0	
2/10/2003	3496	490	1	480	98%	100	50	38		639	400	262	27	102	72	50	266	90	26	10	258	83	3.2	10
3/18/2003	4360	882	/	864	98%	100	50	92	12	125	100	266	25	123	15	10	278	124	0	0	282	117	0	0
4/29/2003	5359	1029	1	999	97%	75	50	75	50	152	50	132	16	118.5	48.2	25	302	96	18.6	10	287	86	0.6	0
5/13/2003	5700	343	/	341	99%	75	50	78		127	50	239	48	130	41.8	50	246	108	46	25	245	97	0.6	0
6/30/2003	6850	1176	/	1150	98%	50	50	115	32	82.4	50	140	66	173	36.8	50	198	157	25.1	25	240	150	29.8	100
7/10/2003	6851	245	/	1	0%	50	50	99.5	25	406	400	151	68	156	221	215	260	76	0	0	222	81.9	0	0
7/22/2003	7144	294	1	294	100%	50	50			127		400		168	65			107	0			106	0	
8/26/2003	7957	858	1	813	95%	50	50	79	13.5	137	10	186	65	170	51.4	5	291		55.4	10	232		35.6	10
9/23/2003	8274	686	1	317	46%	50	50	218	33	141	15	194	64	160	55	30	254	124	0	0	210	110	0	0
10/21/2003	8945	686	1	671	98%	50	50	166	45		20	158	68	166	37.5	25	214	130	30.7	15	225	112	0	0
11/24/2003	9749	833	1	805	97%	50	50	130	46	141	125	178	72	138	261	200	225	52	0	0	205	51.4	0	0
1/6/2004	9750	1054	1	1	0%	50	50	98.5	74	118	100	164	12	140	247	250	224	48.6	0	0	200	48.4	0	0
2/9/2004	10336 11289	833 1225	1	586	70% 78%	50 50	50 50	121	44 >50	23.1	10 <10	172	70 70	155.8	29.8	25 <10	233	137	41.4	25	235	117	24	-5
3/30/2004	11289	1225	1	953	78%	50	50	103	>50	34	<10	198	70	160	22	<10	240	128	22	<10	160	115	24	<5

Notes:

PID = Total VOC concentration measured with photoionization detector

ppm = parts per million (volume/volume basis)

PCE = Tetrachloroethene (PCE) concentration measured with Drager tube of 10-500 ppm range

scfm = standard cubic feet per minute

cfm = cubic feet per minute

Influent SVE = Readings collected between the SVE Blower and the Carbon Units

Mid GAC = Readings collected between the lead and lag carbon units

Effluent GAC = Readings collected after the lag carbon unit

GAC = granular activated carbon unit

-- = measurement not recorded

TABLE 2 PCE

REMOVAL ESTIMATE NATIONAL HEATSET PRINTING 1 ADAMS BLVD., FARMINGDALE, NY

	VOC Influent	PCE Influent	% PCE		Elapsed Time	PCE Removal	Cumulative
	Concentration	Concentration	of Total	Extraction Well	Since Last Visit	Since Last Visit	PCE Removal
Date	* (ppmv)	* (ppmv)	VOCs	Flow Rate (cfm)	(day)	(lb)	(lb)
9/18/2002				SVE PILOT TES	T STARTUP		
9/30/2002	2,000	500	25.0	34.5	12	126	126
10/14/2002	1,011	400	39.6	38	14	129	255
11/19/2002	0	0		49	36	116	371
12/16/2002	560	200	35.7	36.5	27	70	441
1/13/2003	485	400	82.5	28.5	28	157	597
1/21/2003	0	0		0	8	63	660
2/10/2003	639	400	62.6	38	20	65	725
3/5/2003	263	200	76.0	24.4	23	132	856
3/18/2003	125	100	80.0	92	13	77	934
4/29/2003	152	50	32.9	75	42	109	1,042
5/13/2003	127	50	39.4	78	14	65	1,107
6/30/2003	82.4	50	60.7	115	48	91	1,198
7/22/2003	406	400	98.5	99.5	12	416	1,615
8/26/2003	137	10	7.3	79	35	291	1,906
9/23/2003	141	15	10.6	218	14	30	1,936
10/21/2003	37.5	20	53.3	166	28	42	1,978
11/24/2003	141	125	88.7	130	34	179	2,157
1/6/2004	118	100	84.7	98.5	43	-	2,157
2/9/2004	23.1	10	43.3	121	34	126	2,283
3/30/2004	22	10	45.5	103	50	28	2,311

Notes:

Removal Rate = [(flow(cfm)*influent conc.(ppmv)*MW*12.187)/(273.15+C)]*1 cu. m./35.31 cu. ft*1g/1000 mg*1 lb/453.6 g *60 min/1 hr*24 hr/1 day*days of operation

Where:

MW = molecular weight
Molecular weight (MW) of PCE is 165.85
C = degrees centigrade, assumed to be 25
lb = pounds
cfm = cubic feet per minute
ppmv = parts per million (volume/volume basis)

^{* =} VOC concentrations of 2,000 ppm and PCE concentrations of 500 ppm are greater than the limit of their respective monitoring device and are to be taken as estimations.

TABLE 3 AIR SAMPLE ANALYTICAL RESULTS NATIONAL HEATSET PRINTING 1 ADAMS BLVD., FARMINGDALE, NY

	SVE Influent Conce	entration (mg/m3)	
Date	cis-1,2-Dichloroethene	Tetrachloroethene (PCE)	Trichloroethene
9/18/2002	5	600E	31
9/30/2002	ND (5)	360E	23
10/14/2002		1	
11/19/2002			

	VGAC Effluent Cond	centration (mg/m3)	
Date	cis-1,2-Dichloroethene	Tetrachloroethene (PCE)	Trichloroethene
9/18/2002		1	
9/30/2002		-	
10/14/2002		-	
11/19/2002		-	
12/16/2002	ND (5)	ND (5)	ND (5)
1/21/2003		-	
2/10/2003	ND (5)	8	6
3/18/2003		-	
4/29/2003		-	
5/13/2003	ND (1)	5	ND (1)
6/30/2003		-	
7/22/2003	ND (1)	ND (1)	ND (1)
8/26/2003	ND (5)	29	3.6
9/23/2003	ND (5)	ND (5)	ND (5)
10/21/2003	ND (5)	ND (5)	ND (5)
11/24/2003			
1/6/2004			
2/9/2004	10	ND (5)	ND (5)
3/30/2004	2J	77	1J

Notes:

Only compounds that were detected above the method reporting limit were presented above ND(5) = Not detected above method reporting limit in parenthesis

E = Concentation exceeded calibration range

SVE = Soil vapor extraction

VGAC = vapor-phase granular activated carbon unit

mg/m3 = milligrams per cubic meter

-- = sample not collected

J = Estimated Value

TABLE 4 AIR DISCHARGE MONITORING NATIONAL HEATSET PRINTING 1 ADAMS BLVD., FARMINGDALE, NY

								Discharge ha	sed on Field						
		Field Mo	onitorina		Labo	ratory R	esults	Moni			Disch	narge based or	l aboratory l	Results	
		1 ICIG IVIC	Jilloring		Labo	ratory ix	Courto	WOTH	loring		Disci	large based of	Laboratory	Courto	
															ĺ
	System	PCE System	System				cis-1,2-	PCE	PCE	PCE	PCE	TCE			cis-1,2-DCE
	Effluent	Effluent			PCE	TCE	DCE	Discharge	Discharge	Discharge	Discharge	Discharge	Discharge	Discharge	Discharge
	Flow Rate	Concentration	Concentration	Time	(mg/cu	(mg/cu	(mg/cu	Since Last	Since Last		Since Last	Since Last	Since Last	Since Last	Since Last
Date	(cfm)	(ppmv)	(ppmv)	(day)	m.)	m.)	m.)	Visit (lb/hr)	Visit (lb)	Visit: lb/hr	Visit (lb)	Visit (lb/hr)	Visit (lb)	Visit (lb/hr)	Visit (lb)
9/18/2002				1		1	S	VE PILOT TE	ST STARTUP						1
9/30/2002	290		0	12					-						
10/14/2002			0	14											
11/19/2002	290		0	36											
12/16/2002	340		0	27	ND (5)	ND (5)	ND (5)			0.00	0.00	0.00	0.00	0.00	0.00
1/13/2003	45	0		28				0.0000	0.00						
1/21/2003	220		0	8											
2/10/2003	258	10	3.2	20	8.0	6.0	ND (5)	0.0654	31.40	0.008	3.71	0.006	2.78	0.00	0.00
3/5/2003	305		0	23	-	-			1						
3/18/2003	282	0	0	13	-	-		0.0000	0.00						
4/29/2003	287	0	0.6	42				0.0000	0.00						
5/13/2003	245	0	0.6	14	5.0	ND (1)	ND (1)	0.0000	0.00	0.005	1.54	0.00	0.00	0.00	0.00
6/30/2003	240	100	29.8	48			-	0.3043	350.56						
7/22/2003	222		0	12	ND (1)	ND (1)	ND (1)			0.00	0.00	0.00	0.00	0.00	0.00
8/26/2003	232	10	35.6	35	29.0	3.6	ND (5)	0.0588	49.42	0.025	21.17	0.003	2.63	0.00	0.00
9/23/2003	210	0	0	28	ND (5)	ND (5)	ND (5)	0.0000	0.00	0.000	0.00	0.000	0.00	0.00	0.00
10/21/2003	225	0	0	28	ND (5)	ND (5)	ND (5)	0.0000	0.00	0.000	0.00	0.000	0.00	0.00	0.00
11/24/2003	205	0	0	34	`	`	`	0.0000	0.00						
2003 Totals:									431.38		26.424		5.412		0.000
1/6/2004	200	0	0	43				0.0000	0.00						
2/9/2004	235	0	0	34	ND (5)	ND (5)	10	0.0000	0.00	0.000	0.00	0.000	0.00	0.009	7.18
3/30/2004	160	5	24	50	77	1J	2J	0.0203	24.34	0.046	55.38	0.001	0.72	0.001	1.44
2004 Totals:					•				24.34		55.38		0.72		8.62

Notes:

-- = Measurement not recorded

Discharge Rate (Field Monitoring, Ib/hr) = [(flow(cfm)*influent conc.(ppmv)*MW*12.187)/(273.15+C)]*1 cu. m./35.31 cu. ft*1g/1000 mg*1 lb/453.6 g*60 min/1 hr Discharge (Field Monitoring, Ib) = Discharge Rate (lb/hr) * # of days*24hours/day*60 minutes/hr

Discharge Rate (Lab Results, lb/hr) = flow (cfm)*effluent conc. (mg/cu. m.)*1g/1000mg*1lb/453.6g*1cu. m./35.31cu. ft*60min/1 hr **Discharge (Lab Results, lb)** = Discharge Rate (lb/hr) * # of days*24hours/day

Where:

MW = molecular weight

Molecular weight (MW) of PCE is 165.85, Molecular weight (MW) of TCE is 131.4, Molecular weight of cis-1,2-DCE is 96.94

C = degrees centigrade, assumed to be 25

cfm = cubic feet per minute

mg/cu. m = milligrams per cubic meter

ppmv = parts per million (volume/volume basis)


lb = pounds

hr = hours

J = Estimated ryally Reatset\Monthly OM Reports\Mar04\Table 4.xls

F	Permit Limit	
	lb/hr	lb/yr
PCE	0.031	270
TCE	0.014	120
cis-1,2-DCE	0.63	5,510

FIGURES

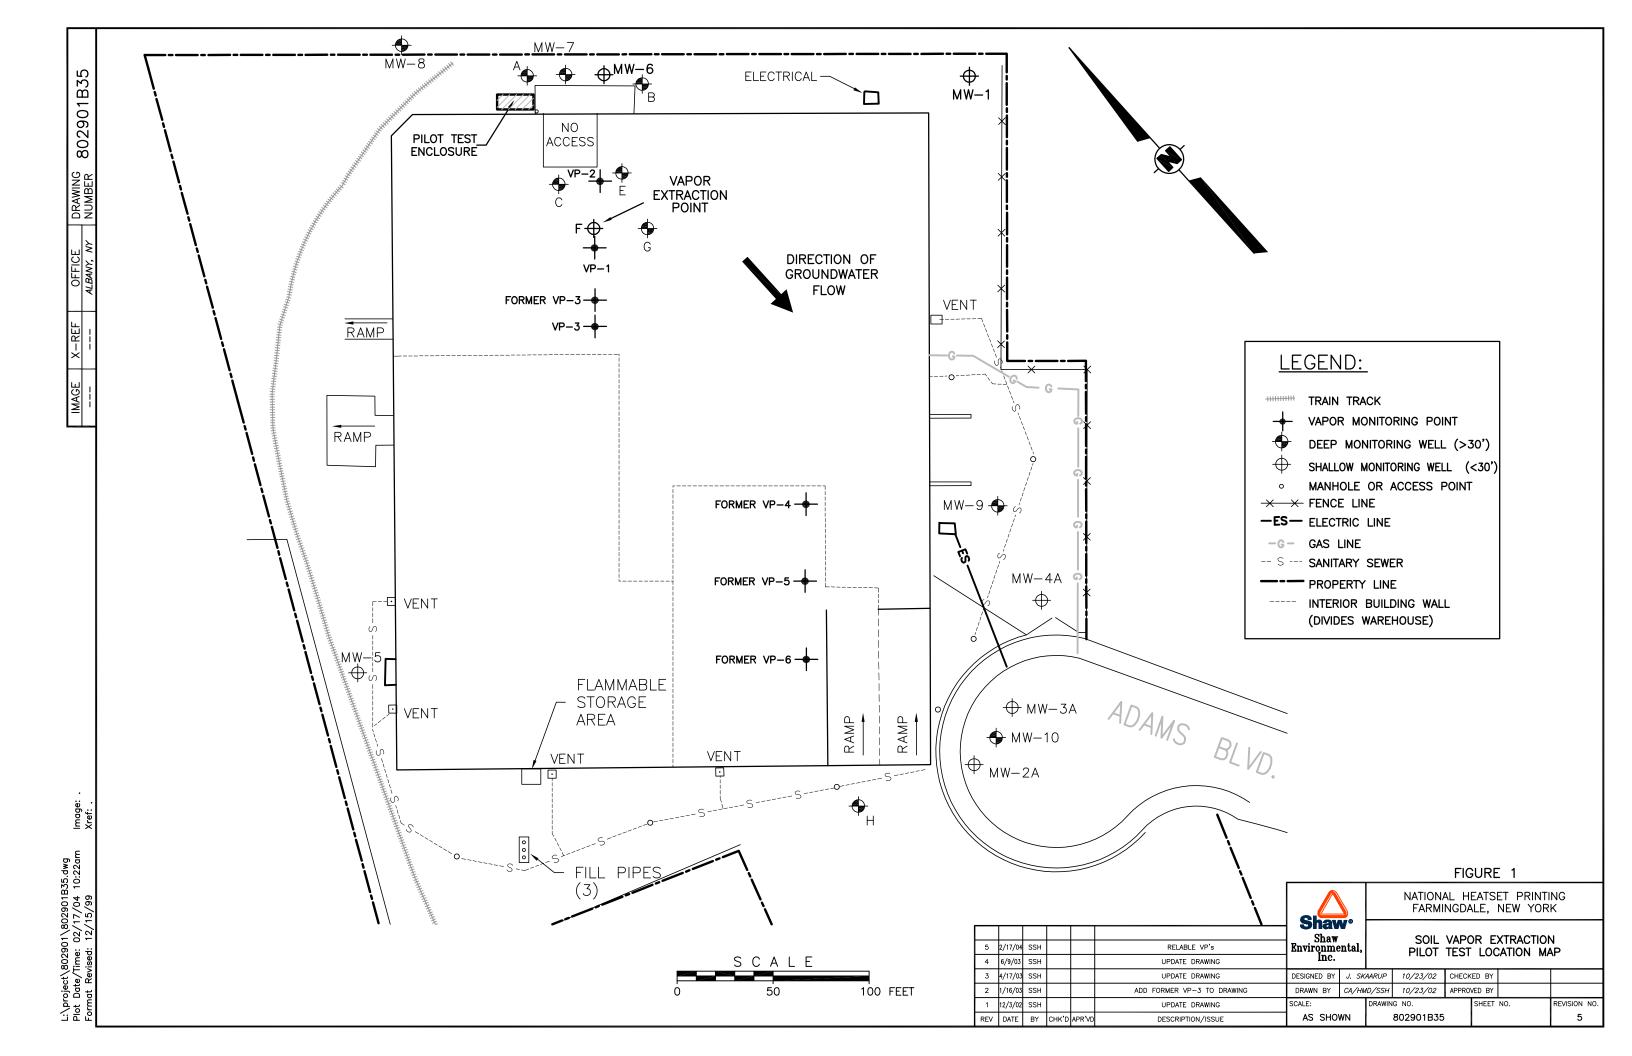

APPENDIX A SITE VISIT DOCUMENTATION

National Heatset Printing

1 Adams Boulevard, Farmingdale, New York Shaw Environmental, Inc. Job/Task Number 802901/06010000

Personnel: S, Slang Weather: ~ your Mostly Charty	Time: 15,45 Date: 3/30/04
System Status: Arrival: Departure: Run Timer Reading: Electric Meter Reading: 5745	
System Data: Arriva	Departure
Extraction Well F Gate Valve: 50 % Open Dilution Valve: 50 % Open	Departure 50% Open 100% Open
Pre-Bleed Air (Extraction Well):Flow:103CFMVacuum:>30"H2OPID Reading:34PPMDraeger Tube:40PPMTemperature:50°F	Post-Bleed Air (SVE Influent): Flow: Vacuum: PID Reading: Draeger Tube: Temperature: Post-Bleed Air (SVE Influent): 198
Carbon Monitoring: Mid: 22 PPM 250 CFM Effluent: 24 PPM 160 CFM Carbon effluent sample collected & shipped to lab?	178 Temp. (°F) 210 PPM (Drager) 1/5 Temp. (°F) 25 PPM (Drager)
Knockout Tank Drained? # Gallons: Purge water drums on-site:	
Monitoring Well Gauging / Vapor Point Monitoring:	
Well/V.P. ID: MW-C MW-E MW-F MW-G	VP-1 VP-2 VP-3 VP-4 VP-5 VP-6
DTW (ft): 18./8 /8.27 — 17.92	
Vac. (" H2O):	>2 0,50 0,10
Comments: Office of the back to 5	to 100% open & pror to departure
within the nost few weeks.	

APPENDIX B LABORATORY REPORT OF ANALYSES





"Environmental Testing For The New Millennium"

APR 21

	The second secon
e align	The state of the s

April 16, 2004

Shaw Environmental & Infrastructure, Inc. 13 British American Boulevard Latham, NY 12110 Attn: Mr. John Skaarup

RE: Client Project: National Heatset, 802901

Lab Project #: C0264

Dear Mr. Skaarup:

Enclosed please find the data report of the required analysis for the sample associated with the above referenced project. If you have any questions regarding this report, please call me.

We appreciate your business.

Sincerely,

Agnes R. Ng

CLP Project Manager



Report of Laboratory Analyses for Shaw Environmental & Infrastructure, Inc.

Client Project: National Heatset

SDG# C0264

Mitkem Work Order ID: C0264

April 16, 2004

Prepared For:

Shaw Environmental & Infrastructure, Inc.

13 British American Boulevard

Latham, NY 12110 Attn: Mr. John Skaarup

Prepared By:

Mitkem Corporation

175 Metro Center Boulevard

Warwick, RI 02886 (401) 732-3400



Client: Shaw Environmental & Infrastructure, Inc.

Client Project: National Heatset, 802901

Lab Project: C0264

Date samples received: 03/31/04

Project Narrative

This data report includes the analysis results for one (1) air sample in a Tedlar bag that was received from Shaw Environmental & Infrastructure, Inc on March 31, 2004. Analyses were performed per specification in the Chain of Custody form. For reference, a copy of the Mitkem Work Order form is included for cross-referencing the client sample ID and laboratory sample ID.

All of the analyses were performed according to method specifications, as modified by Mitkem. No unusual occurrences were noted during sample analysis.

All pages in this report have been numbered consecutively, starting with the title page and ending with a page saying only "Last Page of Data Report".

This data report has been reviewed and is authorized for release as evidenced by the signature below.

Agnes Ng

CLP Project Manager

CEFFLUENT

Lab Name: MITKEM CORPORATION

Contract:

· -----

Lab Code: MITKEM

Case No.:

SAS No.:

SDG No.: C0264

Matrix: (soil/water) AIR

Lab Sample ID: C0264-01A

Sample wt/vol:

5 (g/mL) ML

Lab File ID: V1G0745

Level: (low/med)

w/med) LOW

Date Received: 03/31/04

% Moisture: not dec.

Date Analyzed: 04/02/04

GC Column: DB-624

ID: 0.25 (mm)

Dilution Factor: 1.0

CONCENTRATION UNITS:

Soil Extract Volume: (uL)

Soil Aliquot Volume: ____(uL)

CAS NO. COMPOUND $(ug/L or ug/Kg)(\overline{MG}/M3)$ Q 74-87-3-----Chloromethane 5 U 75-01-4------Vinyl Chloride 5 U 5 5 74-83-9-----Bromomethane บ 75-00-3-----Chloroethane U 5 บ 75-35-4----1,1-Dichloroethene 67-64-1-----Acetone 5 U 75-15-0-----Carbon Disulfide 5 U 5 U 75-09-2-----Methylene Chloride 5 156-60-5----trans-1,2-Dichloroethene U 1634-04-4-----Methyl tert-butyl ether 5 U 75-34-3----1,1-Dichloroethane 5 U 5 U 78-93-3----2-Butanone 2 J 🗲 156-59-2----cis-1,2-Dichloroethene 5 67-66-3-----Chloroform U 71-55-6-----1,1,1-Trichloroethane 5 U 56-23-5-----Carbon Tetrachloride 5 U 107-06-2----1,2-Dichloroethane 5 U 5 71-43-2----Benzene U 1 79-01-6-----Trichloroethene $J \leftarrow$ 78-87-5----1,2-Dichloropropane 5 U 5 75-27-4-----Bromodichloromethane U 10061-01-5----cis-1,3-Dichloropropene 5 U 5 Ū 108-10-1-----4-Methyl-2-pentanone 5 5 U 108-88-3-----Toluene 10061-02-6----trans-1,3-Dichloropropene U 5 79-00-5----1,1,2-Trichloroethane U 77 127-18-4----Tetrachloroethene ਹ 591-78-6----2-Hexanone 5 5 124-48-1-----Dibromochloromethane U 108-90-7-----Chlorobenzene 5 U 5 100-41-4----Ethylbenzene U 5 U -----m,p-Xylene 5 95-47-6----o-Xylene U 1330-20-7-----Xylene (Total) 5 | U

VOLATILE ORGANICS ANALYSIS DATA SHEET

79-34-5----1,1,2,2-Tetrachloroethane

EPA SAMPLE NO.

CEFFLUENT Lab Name: MITKEM CORPORATION Contract: Lab Code: MITKEM Case No.: SAS No.: SDG No.: C0264 Matrix: (soil/water) AIR Lab Sample ID: C0264-01A Sample wt/vol: 5 (g/mL) ML Lab File ID: V1G0745 Level: (low/med) LOW Date Received: 03/31/04 % Moisture: not dec. Date Analyzed: 04/02/04 GC Column: DB-624 ID: 0.25 (mm) Dilution Factor: 1.0 Soil Extract Volume: (uL) Soil Aliquot Volume: (uL) CONCENTRATION UNITS: CAS NO. COMPOUND (ug/L or ug/Kg) MG/M3 Q 100-42-5----Styrene 5 U 5 U 5 U 75-25-2-----Bromoform

WorkOrder: C0264	
01/Apr/04 8:01	
Mitkem Corporation	

Client ID: SHAW LATHAM	Case:	Report Level: 1 EVEL 2	EVEL 2
Project: NYSDEC National Heat Set	SDG:	EDD: X	XL XL
Location: 802901	PO: 205503	HC Due: 0	04/14/04
Comments: N/A		Fax Due:	

Hold MS SEL Storage

NOA

Air samples - 95-1, run 5mL

Invoice Reamrks

Test Code

Collection Date Date Received Matrix

Client Sample ID

Ceffluent

Sample ID C0264-01A

T014

Air

03/30/04 15:55 03/31/04

Page 1 of 1



175 Metro Center Boulevard Warwick, Rhode Island 02886-1755 (401) 732-3400 • Fax (401) 732-3499 email: mitkem@mitkem.com

CHAIN-OF-CUSTODY RECORD

o o o o o o o o o o o o o o o o o o o
PHONES 18-783 196
FA X10-783-8397
CLIENT PROJECT #: CLIENT P.O.#:
80270/ 205503
SOIL ABBR
-
DATE/TIME ACCEPTED BY
3/2/8
WHITE: LABORATORY COPY

MITKEM CORPORATION

Sample Condition Form

Page _ of _

Received By: E/P		y: The	Date:	3/31/04	N	IITKEN	1 Project	COZ
Client Project: / Oct	imul C	lient: SIA	aw		·	·		
, · · · · · · · · · · · · · · · · ·	lecuset				Prese	ervatio	(Ha) n	VOA
Condition:			Lab Sa	mple ID			HCI Nac	
1)Custody Seal(s)	Present /	Absent		01			П	A
	Coolers /	Bottles						 /
0 1 1 0 111	Intact /	Broken				 	 	1
Custody Seal Number	ers							 -
		_						
								
		_						
•		 .						
	_							
		_		· · · · · · · · · · · · · · · · · · ·				
3)Chain -of- Custody	Propert	Absout						
o) onain -oi- custouy	Plesell	Absent	<u> </u>					
4)Airbill(s) Prese	ent / Absent	.#				<u> </u>		
1/2 troin(0)	ent/Absent							
Airbill Number(s)	111							
Taribor(5)	_10A					<u> </u>		
								
5)Cooler Temperature	NA	-						
, and a sumpercutation		-						
Coolant Condition	112							
		-						
6)Sample Bottles Int	act/Broken/Le	akina		 -				
ואו	in lade							
7)Date Received 🌂	3/2 3/	zini						
		211.7						
B)Time Received	0900						 	
		_			 		 	
/OA Matrix Key:								
JS = Unpreserved So	il	A = Air						
JA = Unpreserved Aq	ueous	H = HCI						
NN = MeOH& NaHSo	O4 '	E=Encore						
N = NaHSO4 M = I	MeOH							
		ţ		 +				-
		ł						-
				·L				<u> </u>

Last Page of Data Report