

Interim Remedial Measures Work Plan (IRM WP)

Sub-Slab Depressurization System (SSDS)

Site Location:

655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site #224415

Prepared for:

Unidos ZR LLC
751 3rd Avenue
Franklyn Square, NY 11010

Prepared by:

EnviroTrac Engineering & Geology, P.C.
5 Old Dock Road
Yaphank, NY 11980

May 2026



**The following personnel have prepared, reviewed,
and approved this document:**

Interim Remedial Measures Work Plan

**655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site #224415**

Dale C. Konas, P.E.
Principal Engineer

“I, Dale C. Konas, certify that I am currently a NYS-registered Professional Engineer as defined in NYCRR Part 375 and that this Interim Remedial Measures Work Plan was prepared in accordance with applicable statutes and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10) and that all activities were performed in full accordance with DER-approved work plan and any DER-approved modifications.”

May 29, 2026
Date

Table of Contents

Table of Contents	ii
1. INTRODUCTION	2
1.1 SITE BACKGROUND	2
1.1.1 Site Description.....	2
1.1.2 Site Environmental Setting.....	2
1.1.3 Previous Investigations	3
1.2. Objectives.....	4
2.0 SCOPE OF WORK	5
2.1 Overview.....	5
2.2 Summary of Site Investigation Results.....	5
2.3 Technical Approach	7
2.3.1 Sub-slab Depressurization System (SSDS) Installation.....	7
2.3.2 Evaluation of IRM Results.....	8
2.3.1.1. Sub-slab Depressurization System Performance Testing Results.....	8
2.4. Investigation Derived Waste (IDW)	8
2.5. Health and Safety	9
2.6. Community Air Monitoring.....	9
3. REPORTING OF RESULTS	10
3.1. IRM Construction Completion Report.....	10
3.2. Electronic Data Deliverable.....	10
4. PROJECT SCHEDULE	10
5. REFERENCES	12

Figures

1A:	U.S.G.S. Topographic Map
1B:	Surrounding Land Use Map
SSDS-001.00:	TITLE SHEET
SSDS-002.00:	DRAWING INDEX, SITE LOCATION, ABBREVIATIONS, AND NOTES
SSDS-003.00:	SITE PLAN – SSDS LAYOUT
SSDS-004.00:	MISCELLANEOUS SSDS DETAILS

Attachments

- A. Remedial Design Work Plan
- B. Health and Safety Plan
- C. Community Air Monitoring Program

1. INTRODUCTION

On behalf of Unidos ZR LLC, EnviroTrac Engineering & Geology, P.C. (EnviroTrac) has prepared the following Interim Remedial Measures (IRM) Work Plan for the property located at 655-671 Stanley Avenue, Brooklyn, New York (the site). This report was completed in response to the assignment of NYSDEC Site No. 224415 to the site and the subsequent Order on Consent executed December 12, 2024. This IRM Work Plan was completed in accordance with the New York State Department of Environmental Conservation (NYSDEC) DER Technical Guidance for Site Investigation and Remediation (DER-10).

1.1 SITE BACKGROUND

1.1.1 Site Description

The site is located at 655-671 Stanley Avenue, Brooklyn, New York (Figure 1B). The site consists of one (1) irregular-shaped parcel with an estimated area of 0.34 acres in size. The site is improved with one-story (1) commercial building with a full basement, and asphalt-paved parking lots in the front and rear of the building which is at basement grade. The building has an estimated gross floor area of 11,330 square feet and contains a total of three (3) commercial units (City Fresh Market, one (1) vacant unit (former Lily's Dry Cleaner), and Tex's Chicken & Burgers). A review of the New York City Building Department property profile overview indicated that the existing building was constructed in 1950. The building occupies most of the parcel and is bordered by landscaped areas, municipal walkways, and right-of-ways.

The site is bound to the south by Stanley Avenue, to the north by commercial and residential properties, to the east by a commercial property and Hendrix Street, and to the west by commercial properties with Van Sicken Avenue beyond.

1.1.2 Site Environmental Setting

The surface topography of the Site and surrounding vicinity was obtained from the USGS (<https://apps.nationalmap.gov/downloader/#/>), Figure 1A. The topographic elevation of the Site is approximately 10-15 feet above mean sea level (MSL) at sidewalk grade.

Soil observed during the previous investigation events consisted primarily of fine sand and silt. Groundwater was observed at approximately 1 to 2 feet below basement grade and between 10 and 10.5 feet below sidewalk grade to the south of the building along Stanley Avenue.

The site is located within the Atlantic Coastal Plain physiographic province of New York. This province is characterized by an eastward thickening wedge of sediment deeply underlain by a metamorphic bedrock. Although this area is part of the Coastal Plain, the regional geology is characterized by depositional landforms of continental glaciers created through the retreat of the Wisconsin ice sheet in the Late Cretaceous and Pleistocene. Locally the unconsolidated sands and gravels associated with the outwash plains predominate at depth. Shallower surface soils in the vicinity of the Site are characterized as urban fill materials. Regionally, groundwater flow is southerly toward Jamaica Bay.

1.1.1. Site History

Currently, the building contains a total of three (3) commercial units (City Fresh Market, former Lily's Dry Cleaner, and Tex's Chicken & Burgers). A review of the New York City Building Department property profile overview indicated that the existing building was constructed in 1950.

Previous tenants of the site include:

- Supermarkets from 1960 through present
- A dry cleaner on the 663 Stanley Avenue portion of the site on the 1965 through 2007
- Several retail stores including bakeries, laundry, pharmacy, clothing and fabric stores, and other miscellaneous retail sales.

1.1.3 Previous Investigations

Several investigative work phases have taken place at the Site from 2023 to 2025 by Castleton Environmental Geology Services DPC, to determine the impact on the environment and human health from historic site operations. These investigations were conducted for due diligence purposes, prior to the current owner purchasing the property. These investigations included the following:

- Phase II Environmental Site Assessment (ESA) – February 2023
- Supplemental Phase II ESA – March 2023

- Remedial Investigation - February 2024
- Chemical Removal Summary Letter – July 20, 2024
- Drywell Remediation Summary Report – July 2024
- Soil Vapor Intrusion Investigation – March 2025
- Site Characterization Report (SCR) – May 2025

Based on results of the previous and most recent investigations conducted at the Site, it has been determined that soil vapor, and groundwater beneath the Site have been impacted by chlorinated volatile organic compounds (CVOCs), petroleum volatile organic compounds (VOCs,) semi-volatile organic compounds (SVOCs), PFOAs, metals, and pesticides, and that remedial measures are warranted to prevent, mitigate, or remedy environmental damage or the consequences of environmental damage. A priority during investigation and/or remediation at a cleanup site is to contain and/or stabilize, to the extent possible, identify sources of contaminants in any media to reduce/eliminate receptor exposure to contaminants or to contain further movement of contaminants through any pathway. This will be accomplished through implementation of interim remedial measures (IRM). The NYSDEC encourages the use of an IRM when a source or exposure pathway can be effectively addressed before completion of the ongoing investigation and remedy selection process.

1.2. Objectives

This IRM Work Plan was developed to address the following objectives:

- provide a brief summary of the Site, including findings pertaining to previous work performed pertinent to the proposed IRM tasks.
- present the technical approach that will be used.
- present procedures that will be employed to address health and safety, quality assurance, and potential community impacts.
- identify applicable regulatory considerations associated with the IRM and discuss their management.
- present information pertaining to a construction completion report (CCR) that will provide results of the completed IRM; and
- provide an IRM implementation schedule.

2.0 SCOPE OF WORK

2.1 Overview

The Site Characterization Report (SCR), conducted by Castleton Environmental Geologic Services, DPC, dated May 2025, was carried out to determine the impacts to soil, soil vapor, and groundwater beneath the Site associated with historical usage of the Site. The Site was previously partially occupied by an active dry-cleaning operation but ceased operation in May 2023. It was determined that these operations had impacted the soil, soil vapor, and groundwater with elevated levels of CVOCs, semi-volatile organic compounds (SVOCs), PFOAs, pesticides, and metals beneath the building. The results of the investigations determined that a source of elevated levels of CVOCs, petroleum VOCs, SVOCs, PFOAs, metals, and pesticides are present beneath the Site, which has contributed to elevated levels of CVOCs in groundwater and soil gas beneath the Site. Due to the presence of elevated levels of CVOCs and petroleum VOCs in soil and groundwater, vapors are also present beneath the Site and may potentially impact the indoor air and soil vapor beneath the building at the Site.

The NYSDEC and New York State Department of Health (NYSDOH) have required vapor mitigation to address elevated levels of VOCs in indoor air. This IRM will address the contaminated soil vapor and indoor air at the Site through the installation and operation of an on-Site active sub-slab depressurization system (SSDS) which will mitigate soil vapor and indoor air impacts beneath and within the building at the Site. EnviroTrac Engineering & Geology P.C. will design, install, and conduct annual operations, maintenance, and monitoring (OMM) of the SSDS.

2.2 Summary of Site Investigation Results

Below lists the previously performed remedial investigations for the Site.

- Phase II Environmental Site Assessment (ESA), Castleton Environmental Geologic Services, DPC, February 2023
- Supplemental Phase II ESA, Castleton Environmental Geologic Services, DPC, March 2023
- Remedial Investigation, Castleton Environmental Geologic Services, DPC, February 2024
- Chemical Removal Summary Letter, Castleton Environmental Geologic Services, DPC, July 20, 2024

- Drywell Remediation Summary Report, Castleton Environmental Geologic Services, DPC, July 2024
- Soil Vapor Intrusion Investigation, Castleton Environmental Geologic Services, DPC, March 2025
- Site Characterization Report (SCR) , Castleton Environmental Geologic Services, DPC, May 2025

Soil

Soil samples were collected from the Site during the Phase II Environmental Site Assessment (ESA) (February 2023) (Castleton Environmental Geologic Services, DPC), from three (3) soil boring locations onsite. Soil analytical results reported concentrations of volatile organic compounds (VOCs) below Unrestricted Use soil cleanup objectives (SCOs) or as non-detect. Tetrachloroethene (PCE), a common dry-cleaning chemical, was detected in one of the three soil samples below Unrestricted Use SCOs

Groundwater

The most recent groundwater sample data collected from the Site during the Site Characterization Report Activities (Castleton Environmental Geologic Services, DPC, May 2025) was reviewed and summarized. The groundwater monitoring results for the Site in April 2026 showed that the CVOCs, PCE exceeded the AWQS of 5ug/L in monitoring well MW01 at 9.2 ug/L and at MW02 at 5.4 ug/L. Benzene was reported at 1.7 ug/l in groundwater sample MW06, slightly above its AWQS of 1 ug/l. The semi-volatile organic compounds (SVOC) Benzo(a)pyrene was reported above GVs in groundwater samples MW01-I, MW02-I and MW03 at 0.04J ug/L, 0.03 J ug/L, and 0.03 J ug/L, respectively. The SVOC Hexachlorobenzene was reported above AWQS/GVs at 0.06 J ug/l in groundwater sample MW01-D. For PFAS, PFOAs were reported in all groundwater samples, including upgradient MW05, ranging from 0.0316 ug/l in MW03 to 0.0628 ug/l in MW06, above its AWQS of 0.0067 ug/l and PFOSs were reported in all groundwater samples, including upgradient MW05, ranging from 0.019 ug/l in MW01-D to 0.0837 ug/l in MW05, above its AWQS of 0.0027 ug/l. For total metals there were reported exceedances for chromium in MW03 of 98.94 ug/L, above its AQS of 50 ug/L, iron a maximum exceedance of 3,840 ug/L in MW05, manganese a maximum of 1,768 ug/L in MW05, and sodium a maximum exceedance of 143,000 ug/L in MW02-D. For dissolved metals, iron was reported at maximum exceedance of 1.14 ug/L in MW5, manganese was reported at a maximum exceedance of 1,581 ug/L in MW05, and sodium was reported at a maximum exceedance of 143,000 ug/L in MW-02-D.

Soil Vapor Intrusion

A soil vapor intrusion investigation was conducted at the Site during the Site Characterization Report Activities (Castleton Environmental Geologic Services, DPC, May 2025), which included four (4) indoor air samples from within the building, four (4) sub-slab soil vapor samples, and one (1) outdoor air sample. The results showed elevated levels of CVOCs in the sub-slab soils beneath the Site building. Results of the samples collected were compared against the New York State Department of Health (NYSDOH) Soil Vapor Intrusion Decision Matrix, which is based on select compounds of concern. Each of the four (4) indoor air samples that were collected during the study yielded results that were below the NYSDOH AGVs. Out of the four (4) sub-slab air vapor samples collected 3 out of the 4 yielded results that were elevated, with a maximum concentration of 1,640 ug/L. When compared to the guidance values within the NYSDOH Decision Matrix, a recommendation of “Mitigation”. With a maximum result of 83.8 ug/L of TCE in two of the sub-slab vapor samples, an action recommendation of “Mitigate” is recommended from the Decision Matrix.

2.3 Technical Approach

2.3.1 Sub-slab Depressurization System (SSDS) Installation

Installation of an SSDS will mitigate potential SVI impacts within the Site building. A total of ten (10) vapor extraction wells will be installed in the building. The wells will be constructed of four (4) inch diameter no-hub cast iron pipe above grade, and four (4) inch diameter 20-slot schedule 40 PVC pipe below grade. No trenching will be conducted during the installation of the SSDS. The wells will be connected to three (3) Obar Systems, Inc. in-line vacuum fans located on the exterior of the building. The system effluent will discharge to the outdoor air, approximately two (2) feet above the roof line of the building and 10 feet from any air intake. Operation, maintenance, and monitoring (OMM) inspections will be performed on an annual basis following system startup. Effluent testing will be completed upon full (post installation startup testing) operation to comply with High Toxicity Air Contaminant (HTAC) requirements per 6 NYCRR Part 212-2.2 Table 2. In addition to effluent testing, post-mitigation indoor air analytical sampling will be conducted no sooner than 30 days following system start-up, within the heating season, to ensure that indoor air concentrations are within background and to confirm the effectiveness of the SSDS. The

system startup testing period will end once communication testing (SSDS performance testing) for the SSDS is complete. If the SSDS is installed outside of the heating season, post-mitigation air sampling will be conducted 30 days following system start-up and then again during the following heating season. A total of four (4) indoor air samples will be collected. The effluent samples will be collected into a one (1) Liter Summa Canister and will be a grab sample collected over a period of approximately three (3) to five (5) minutes. The indoor air samples will be collected into 6 Liter Summa Canisters equipped with six (6) hour flow controllers. All samples will be delivered via courier to a NYSDOH-certified laboratory, for analysis of VOCs by US Environmental Protection Agency (EPA) Method TO-15 with Category B Deliverables. Chain of custody forms will be completed to document sample possession. The results of the effluent vapor sample and indoor air samples will also be reviewed by a third-party data validator, and a Data Usability Summary Report (DUSR) will be provided. The proposed SSDS construction and installation is summarized in the Remedial Design Work Plan (RDWP) provided as **Appendix A** of this report. **Figures SSDS-001.00 through SSDS-004.00** show the SSDS design.

2.3.2 Evaluation of IRM Results

2.3.1.1. Sub-slab Depressurization System Performance Testing Results

Following the installation of the SSDS, eight (8) vacuum monitoring points will be installed within the building at the Site. The vacuum monitoring point construction is provided in the RDWP in **Figure SSDS-004.00**. Vacuum readings will be recorded from each vacuum monitoring point. Pressure differential/vacuum testing will be completed and documented following the startup of the SSDS. Vacuum beneath the slab will be deemed sufficient if readings are -0.02 inches of water or greater.

Should vacuum readings be insufficient, a larger size blower/fan will be installed to provide the appropriate vacuum beneath the slab. An updated SSDS Plan would be provided to the NYSDEC and NYSDOH prior to the installation of additional SSDS vapor extraction wells.

2.4. Investigation Derived Waste (IDW)

IDW includes materials generated during the performance of the prescribed remedial actions that have been contaminated with contaminants of concern and require disposal. The anticipated IDW

will include removed concrete [three (3) 6-inch diameter concrete cores] during the installation of the SSDS extraction points, removed soil during the installation of the SSDS extraction point, and incidental personal protective equipment (“PPE”).

Soil removed during the installation of the SSDS extraction points will be placed into a 55-gallon drum and staged on-Site for proper off-Site disposal at a later date. Contaminated PPE will be collected, double bagged, and properly disposed as appropriate.

2.5. Health and Safety

Health and safety procedures that will be employed during the IRM are presented in the HASP included in **Appendix B**.

2.6. Community Air Monitoring

Community air monitoring procedures that will be implemented during ground intrusive activities at the Site (installation of SSDS extraction wells) are provided in **Appendix C**. Air monitoring will be implemented in accordance with the NYSDOH Generic CAMP with Special Requirements for Work Within 20 Feet of Potentially Exposed Individuals or Populations or Structures and Special Requirements for Indoor Air Work With Co-Located Residences or Facilities.

Air quality in the work zones and nearby areas will be monitored for organic vapors and dust during the work to ensure worker safety (in accordance with provisions provided in the HASP) and to document that no adverse effects from the work conducted are experienced by the occupants of the building and surrounding properties. If the testing results exceed response triggers, then appropriate corrective actions will be taken.

Concrete dust will be diminished by utilizing wet cutting methods and dust masks will be worn by the individuals conducting the concrete work as per the HASP.

CAMP reports will be provided to the NYSDOH and NYSDEC on a weekly basis. The NYSDOH and NYSDEC will be notified within 24 hours of any CAMP action level exceedances and corrective measures taken.

3. REPORTING OF RESULTS

3.1. IRM Construction Completion Report

A Construction Completion Report (CCR) will be prepared and submitted at the completion of the IRM. The CCR will present and discuss the developed remedial action objectives, the selected remedy and the remedial actions performed. Detailed information pertaining to the CCR is provided in DER-10 subdivision 5.8(b)-(d). The CCR will provide a certification and be stamped by a NYS registered professional engineer.

3.2. Electronic Data Deliverable

In accordance with requirements specified in DER-10, laboratory data developed during the IRM will be submitted to the NYSDEC in the NYSDEC-approved Electronic Data Deliverable (EDD) format.

4. PROJECT SCHEDULE

The IRM will be conducted in accordance with the following schedule:

Update Document Repositories and NYSDEC Notification

The IRM process will be initiated immediately upon receipt of approval to proceed from the NYSDEC. Copies of the approved IRM Work Plan will be placed in the following repositories:

- Brooklyn Public Library, 81 Devoe Street, Brooklyn, NY 11211.
- Brooklyn Community Board 1, 435 Graham Avenue, Brooklyn, NY 11211; and
- NYSDEC Region 2 Division of Environmental Remediation, 1 Hunter's Point Plaza, 47-40 21st Street, Long Island City, NY 11101.

Install and Initiate SSDS

Field work will be initiated after a thirty (30) day period following the approval of the IRM Work Plan by the NYSDEC. The NYSDEC case manager will be notified a minimum of seven (7) to 10 days in advance prior to start of work. The SSDS will be installed and operational with two (2)

months following the approval of the IRM Work Plan by the NYSDEC. The Operations, Maintenance, and Monitoring Plan (OMMP) for the SSDS will be submitted to the NYSDEC and NYSDOH for review 30 days following the SSDS startup.

IRM Completion and Reporting of Results

Findings developed through implementation of the IRM will be provided in a CCR that will be submitted to the NYSDEC within 70 days following SSDS startup. This will allow for laboratory testing, data validation by a third-party chemist, evaluation of results, and preparation of the CCR.



5. REFERENCES

New York State Department of Environmental Conservation (May 3, 2010), Final Program Policy DER-10 - Technical Guidance for Site Investigation and Remediation.

Code of Federal Regulations – Title 40: Protection of the Environment 144.26 – Inventory Requirements.

New York State Department of Health (October 2006, Updates December 2006 – May 2017), Guidance for Evaluating Soil Vapor Intrusion in the State of New York.

FIGURES

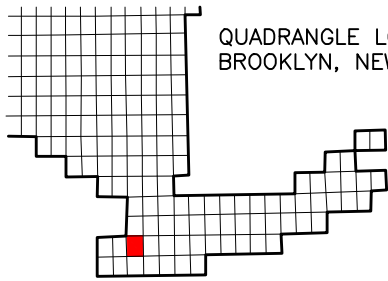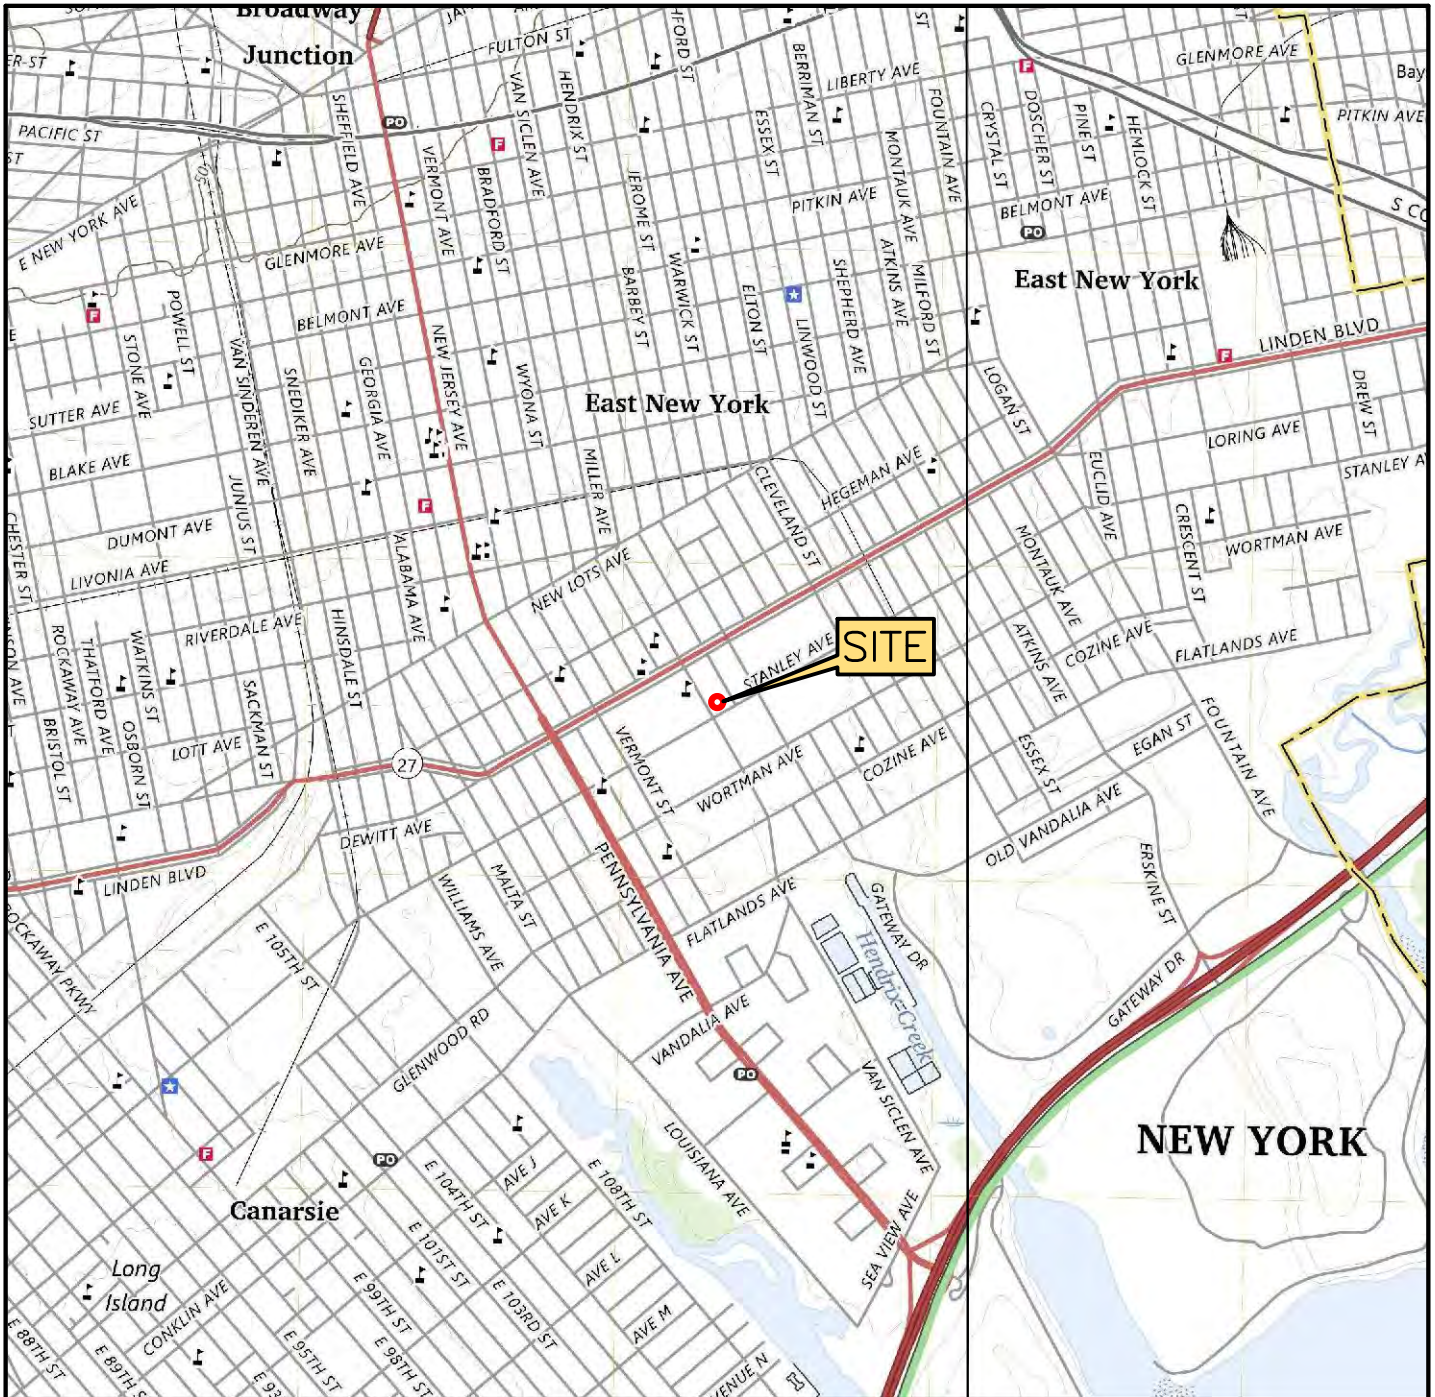


QUADRANGLE LOCATION:
BROOKLYN, NEW YORK

APPROXIMATE ELEVATION:
15 FT.

SOURCE:
USGS 7.5 MINUTE SERIES




FIGURE # 1A	SITE LOCATION MAP	DRAWN BY: B.S.	
	655-671 STANLEY AVENUE BROOKLYN, NEW YORK	REVISION DATE: 5/11/2026	




LEGEND:

--- SUBJECT PROPERTY



0 100
SCALE IN FEET

FIGURE # 1B	SURROUNDING LAND USE MAP	DRAWN BY: B.S.	
	655-671 STANLEY AVENUE BROOKLYN, NEW YORK	REVISION DATE: 5/29/2026	

May 29, 2026

SUB-SLAB DEPRESSURIZATION SYSTEM

DESIGN FIGURES

SITE LOCATION:
655-671 STANLEY AVENUE
BROOKLYN, NEW YORK 11207
NYSDEC SITE NO. 224415

PREPARED FOR:
UNIDOS ZR LLC
751 3RD AVENUE
FRANKLIN SQUARE, NEW YORK 11010

MAY 2026

PREPARED BY:
ENVIROTRAC ENGINEERING & GEOLOGY, PC
5 OLD DOCK ROAD
YAPHANK, NEW YORK 11980

PROJECT ENGINEER

ENVIROTRAC ENGINEERING &
GEOLOGY, PC
5 OLD DOCK ROAD
YAPHANK, NY 11980

SEAL AND SIGNATURE

May 29, 2026

Dale C. Konas, PE
NY Lic. No. 081035

DRAWN/REVISED BY: DK

REVISION DATE: MAY 26, 2026

REVISION No.: 1.0

DRAWING TITLE

TITLE SHEET

PREPARED FOR

UNIDOS ZR LLC
751 3RD AVENUE
FRANKLIN SQUARE, NEW YORK 11010

PROJECT SITE

655-671 STANLEY AVENUE
BROOKLYN, NEW YORK 11207

FIGURE NO.

SSDS-001.00


The logo for EnviroTrac, featuring the word "EnviroTrac" in a bold, sans-serif font. The letter "i" in "Enviro" has a green dot above it. The "T" in "Trac" is also bold and has a horizontal line through its middle.

Environmental Services

5 OLD DOCK ROAD, YAPHANK, NEW YORK 11980
PHONE: (631)924-3001 FAX: (631)924-5001

NOTES:

1. VAPOR COLLECTION PIPING: 4 INCH DIAMETER SCHEDULE 40 PVC PERFORATED OR SLOTTED (0.02" SLOT) PIPING SHALL BE USED FOR THE SUBSURFACE EXTRACTION POINTS TO BE INSTALLED BELOW THE CONCRETE SLAB. A 4" SCHEDULE 40 PVC DOME CAP SHALL BE INSTALLED AT THE END OF EACH LEG.
2. SSD VENT PIPING:
 - 2.1. SUB-SURFACE SOLID PIPING: 4 INCH DIAMETER SCHEDULE 40 PVC PIPE SHALL BE CONNECTED TO THE VAPOR COLLECTION PIPING/EXTRACTION POINTS VIA A 4 INCH DIAMETER COUPLING OR 90 DEG ELBOW FITTING, LOCATED AT THE TOP OF EACH EXTRACTION POINT. EACH LEG OF THE VENT PIPING WILL BE EXTENDED TO A DESIGNATED LOCATION IN THE NEAR VICINITY OF AN EXISTING INTERIOR WALL OR COLUMN. ALL PIPE AND FITTING CONNECTIONS SHALL BE EITHER SOLVENT WELD OR THREADED CONNECTIONS.
 - 2.2. ABOVE GRADE PIPING: ALL EXPOSED ABOVE GRADE VENT PIPE SHALL BE CAST IRON, NO-HUB PIPE AND FITTINGS. ALL PIPE AND FITTING CONNECTIONS SHALL BE NEOPRENE FLEXIBLE COUPLINGS WITH STAINLESS STEEL BANDS. THIS PIPING SHALL BE EXTENDED VERTICALLY THROUGH THE BUILDING FIRST FLOOR CONCRETE FLOOR SLAB. EACH PIPING ZONE HEADER SHALL BE ROUTED ALONG THE BUILDING FIRST FLOOR CEILING AND PENETRATE HORIZONTALLY THROUGH THE EXTERIOR WALL IN EACH DESIGNATED BLOWER LOCATION. THE PIPING RISER SHALL EXTEND THROUGH THE ROOF INTO THE INLET OF EACH ROOF MOUNTED BLOWER. THE EXHAUST PIPING SHALL TERMINATE AT LEAST 2 FEET ABOVE THE SURFACE OF THE ROOF, IN A LOCATION AT LEAST 10 FEET AWAY FROM ANY WINDOW OR OTHER OPENING INTO THE CONDITIONED SPACES OF THE BUILDING THAT IS LESS THAN 2 FEET BELOW THE EXHAUST POINT, AND 10 FEET AWAY FROM ANY ADJOINING OR ADJACENT BUILDING.
3. IN BUILDINGS DESIGNED WITH INTERIOR FOOTINGS OR OTHER BARRIERS TO LATERAL FLOW OF SUB-SLAB SOIL GAS, VENT PIPES SHALL BE INSTALLED IN EACH ISOLATED, NON-CONNECTED FLOOR AREA. IF MULTIPLE VENT POINTS ARE USED IN NON-CONNECTED FLOOR AREAS, VENT PIPES ARE PERMITTED TO BE MANIFOLDED BELOW THE FLOOR SLAB INTO A SINGLE VENT.
4. TO RETARD SOIL GAS ENTRY, LARGE OPENINGS THROUGH CONCRETE SLABS OR OTHER FLOOR ASSEMBLIES IN CONTACT WITH THE SOIL, SUCH AS SPACES AROUND BATHTUB, SHOWER, OR TOILET DRAINS, SHALL BE FILLED OR CLOSED WITH MATERIALS THAT PROVIDE A PERMANENT AIRTIGHT SEAL SUCH AS NON-SHRINK MORTAR, GROUTS, EXPANDING FOAM, OR SIMILAR MATERIAL DESIGN FOR SUCH APPLICATION.
5. TO RETARD SOIL GAS ENTRY, SMALLER GAPS AROUND ALL PIPES, WIRE, OR OTHER OBJECTS THAT PENETRATE THE CONCRETE SLAB OR OTHER FLOOR ASSEMBLY SHALL BE MADE AIRTIGHT WITH AN ELASTOMER JOINT SEALANT OR POLYETHYLENE TAPE, AS DEFINED IN ASTM C920-87, AND APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
6. TO RETARD SOIL GAS ENTRY ALL CONTROL JOINTS, ISOLATION JOINTS AND ANY OTHER JOINTS IN CONCRETE SLABS OR BETWEEN SLABS AND FOUNDATION WALLS SHALL BE SEALED. A CONTINUOUS FORMED GAP "TOOLED EDGE" WHICH ALLOWS THE APPLICATION OF A SEALANT THAT WILL PROVIDE A CONTINUOUS, AIRTIGHT SEAL SHALL BE CREATED ALONG ALL JOINTS. WHEN THE SLAB HAS CURED, THE GAP WILL BE CLEARED OF ANY LOOSE MATERIAL AND FILLED WITH AN ELASTOMER JOINT SEALANT, AS DEFINED IN ASTM C920-87, AND APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
7. CONCRETE MASONRY FOUNDATION WALLS BELOW THE GROUND SURFACE SHALL BE CONSTRUCTED TO MINIMIZE THE TRANSPORT OF SOIL GAS FROM THE SOIL TO THE BUILDING. HOLLOW BLOCK MASONRY WALLS SHALL BE SEALED AT THE TOP TO PREVENT THE PASSAGE OF AIR FROM THE INTERIOR OF THE WALL TO THE LIVING SPACE. AT A MINIMUM, ONE COURSE OF SOLID MASONRY, ONE COURSE OF MASONRY GROUTED SOLID, OR A POURED CONCRETE BEAM AT OR ABOVE THE FINISHED GROUND SURFACE LEVEL SHALL BE USED FOR THIS PURPOSE. WHERE A BRICK VENEER OR OTHER MASONRY LEDGE IS INSTALLED, THE COURSE IMMEDIATELY BELOW THAT LEDGE SHALL ALSO BE SEALED.
8. JOINTS, CRACKS, OR OTHER OPENINGS AROUND ALL PENETRATIONS OF BOTH EXTERIOR AND INTERIOR SURFACES OF MASONRY BLOCK WALLS BELOW THE GROUND SURFACE SHALL BE SEALED WITH AN ELASTOMETRIC SEALANT THAT PROVIDES AN AIRTIGHT SEAL. PENETRATIONS OF POURED CONCRETE WALLS SHALL ALSO BE SEALED ON THE EXTERIOR SURFACE. THIS INCLUDES SEALING OF WALL TIE PENETRATIONS.
9. ALL EXPOSED AND VISIBLE INTERIOR SSD VENT PIPES SHALL BE IDENTIFIED WITH AT LEAST ONE LABEL ON EACH FLOOR LEVEL. THE LABEL SHALL READ: "ACTIVE VAPOR MITIGATION SYSTEM".
10. VENTILATION FAN(S): EACH OF THE THREE (3) IN-LINE VACUUM BLOWERS SHALL BE INSTALLED NEAR THE ROOF OF THE EXISTING BUILDING AS DEPICTED IN THE "BLOWER AND ROOF PIPING DETAIL". THE FAN SHALL BE INSTALLED AS PER THE MANUFACTURER'S INSTRUCTIONS. A 240 V, 1-PHASE, ELECTRICAL DISCONNECT SWITCH SHALL BE SUPPLIED AND INSTALLED BY A LICENSED ELECTRICIAN IN ACCORDANCE WITH ALL APPLICABLE LOCAL ELECTRICAL CODES. EACH VACUUM BLOWER SHALL BE CAPABLE OF PRODUCING A MINIMUM OF 89 CFM @ 30"H2O VACUUM. EACH VACUUM BLOWER SHALL BE A OBAR COMPACT RADIAL BLOWER, MODEL NO. GBR76-JD, MANUFACTURED BY OBAR SYSTEMS INC, SOUTH NEWFOUNDLAND, NJ, OR EQUAL.
11. SYSTEM INDICATOR: A VACUUM GAUGE SHALL BE INSTALLED ON EACH LEG OF THE VAPOR VENT PIPING IN ORDER TO PROVIDE A VISUAL INDICATION OF THE SYSTEM OPERATION. THE VACUUM GAUGE SHALL BE INSTALLED AT THE LOWEST ACCESSIBLE LOCATION OF EACH MANIFOLD LEG IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. THE VACUUM GAUGES WILL BE 2-12" DIAL, LOW VACUUM DIAPHRAGM GAUGES, 1.5% FULL SCALE ACCURACY. THE VACUUM GAUGES SHALL BE DWYER SERIES LPG4 LOW PRESSURE GAUGE, 0 TO 60" H2O RANGE, MODEL NO. LPG4-D7522N, MANUFACTURED BY DWYER INSTRUMENTS, MICHIGAN CITY, IN.
12. VACUUM ALARM: THREE (3) VACUUM ALARMS SHALL BE INSTALLED IN ORDER TO PROVIDE AN AUDIBLE AND VISUAL ALARM IN THE EVENT THE VACUUM FAN SHUTS DOWN AND THERE IS A LOSS OF VACUUM WITHIN THE SYSTEM PIPING. THE ALARM UNITS SHALL CONNECT TO THE PROCESS PIPING VIA A 1/4" DIAMETER FLEXIBLE POLYETHYLENE TUBE AND POWERED THROUGH A 110V ELECTRICAL OUTLET. THE ALARM UNIT SHALL BE CAPABLE OF TRANSMITTING A REAL-TIME VACUUM READING VIA A 4-20mA SIGNAL TO AN EXTERNAL CENTRAL ALARM TELEMETRY PANEL. THE ALARM UNIT SHALL BE A MODEL GBR25-T, PRESSURE GAUGE / ALARM, MANUFACTURED BY OBAR SYSTEMS, INC.
13. REMOTE MONITORING PANEL: ONE CENTRAL MONITORING PANEL SHALL BE CONNECTED TO EACH OF THE THREE (3) VACUUM ALARM UNITS IN ORDER TO PROVIDE REMOTE NOTIFICATION OF ANY ALARM OR SYSTEM SHUTDOWN CONDITION. THE REMOTE MONITORING SYSTEM SHALL BE CAPABLE OF RELAYING ALARM CONDITIONS VIA A CELLULAR MODEM CONNECTION AND ISSUE ALERTS VIA EMAIL, SMS TEXT NOTIFICATION, AND/OR MOBILE APPLICATION PUSH NOTIFICATION. THE REMOTE MONITORING PANEL SHALL BE A SENTINEL CELLULAR MONITORING STATION, MANUFACTURED BY SENSAPHONE INC.
14. VACUUM MONITORING POINTS: VACUUM TEST POINTS SHALL BE INSTALLED AT A MINIMUM OF TEN (10) LOCATIONS IN THE CONCRETE SLAB FOR THE PURPOSE OF TESTING THE EFFECTIVENESS OF THE SSD SYSTEM. THE VAPOR MONITORING POINTS SHALL BE DRILLED-IN-PLACE STAINLESS STEEL VAPOR PIN INSERTS. EACH MONITORING POINT SHALL BE CAPPED USING A SCREW IN PLACE FLUSH MOUNT STAINLESS STEEL COVER. EACH VAPOR PIN SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS RECOMMENDED INSTALLATION INSTRUCTIONS. MONITORING POINTS SHALL BE STAINLESS STEEL VAPOR PINS (MODEL VPIN0522SS) AND FLUSH MOUNTED STAINLESS STEEL SECURE COVER MANUFACTURED BY COX COLVIN, PLAIN CITY, OH.
15. ALL COMPONENTS OF THE SUB SLAB DEPRESSURIZATION SYSTEM SHALL BE IN ACCORDANCE WITH ASTM E 2121-21 "STANDARD PRACTICE FOR RADON MITIGATION SYSTEMS IN EXISTING LOW-RISE RESIDENTIAL BUILDINGS" AND NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION, (NYSDEC), DER-10 "TECHNICAL GUIDANCE FOR SITE INVESTIGATION AND REMEDIATION".

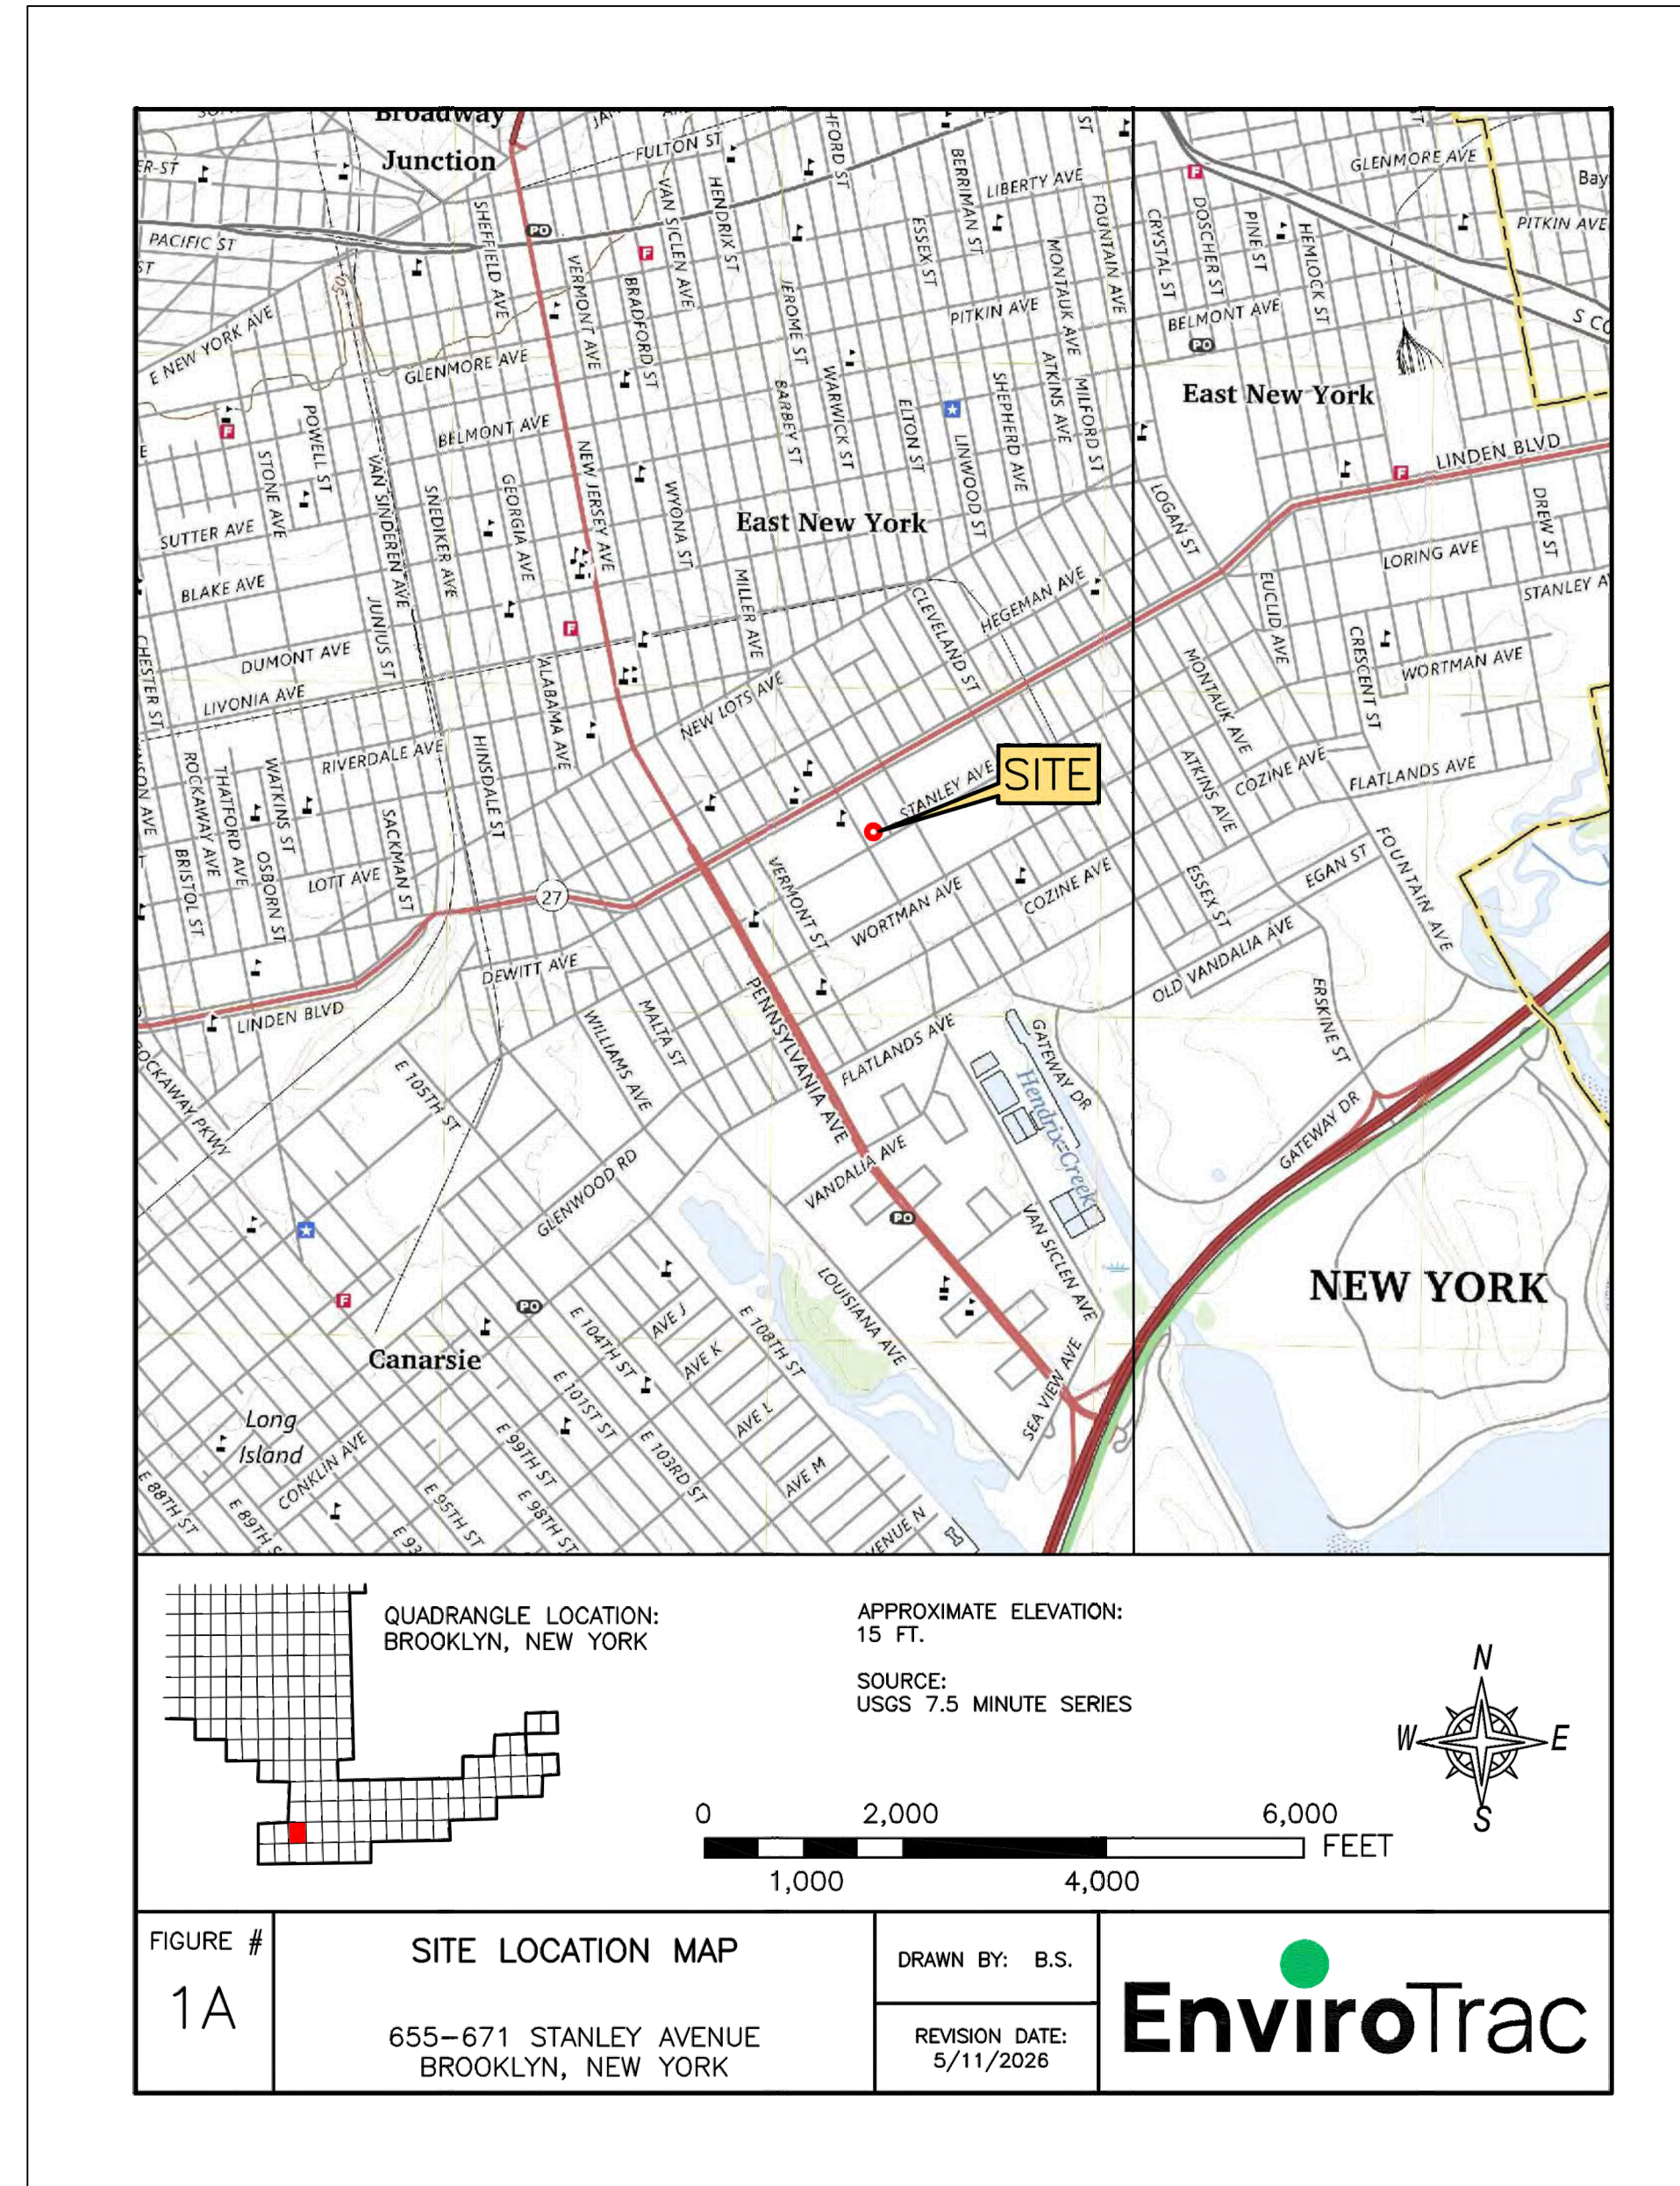

DRAWING INDEX	
DWG. No.	TITLE
SSDS-001.00	TITLE SHEET
SSDS-002.00	DRAWING INDEX, SITE LOCATION, ABBREVIATIONS AND NOTES
SSDS-003.00	SITE PLAN - SSDS LAYOUT
SSDS-004.00	MISCELLANEOUS SSDS DETAILS

ABBREVIATIONS	
SSDS	SUB-SLAB DEPRESSURIZATION SYSTEM
DWG	DRAWING
GFCI	GROUND FAULT CIRCUIT INTERRUPTER
VMP	VACUUM MONITORING POINT
SCH	SCHEDULE
TYP	TYPICAL

PROJECT ENGINEER

ENVIROTRAC ENGINEERING & GEOLOGY, PC
 5 OLD DOCK ROAD
 YAPHANK, NY 11980

SEAL AND SIGNATURE

May 29, 2026

Dale C. Konas, PE
 NY Lic. No. 081035

DRAWN/REVISED BY: DK

REVISION DATE: MAY 28, 2026

REVISION No.: 1.0

DRAWING TITLE

DRAWING INDEX, SITE LOCATION, ABBREVIATIONS AND NOTES

PREPARED FOR

UNIDOS ZR LLC
 751 3RD AVENUE
 FRANKLIN SQUARE, NEW YORK 11010

PROJECT SITE

655-671 STANLEY AVENUE
 BROOKLYN, NEW YORK 11207



FIGURE NO.

SSDS-002.00





EnviroTrac

Environmental Services

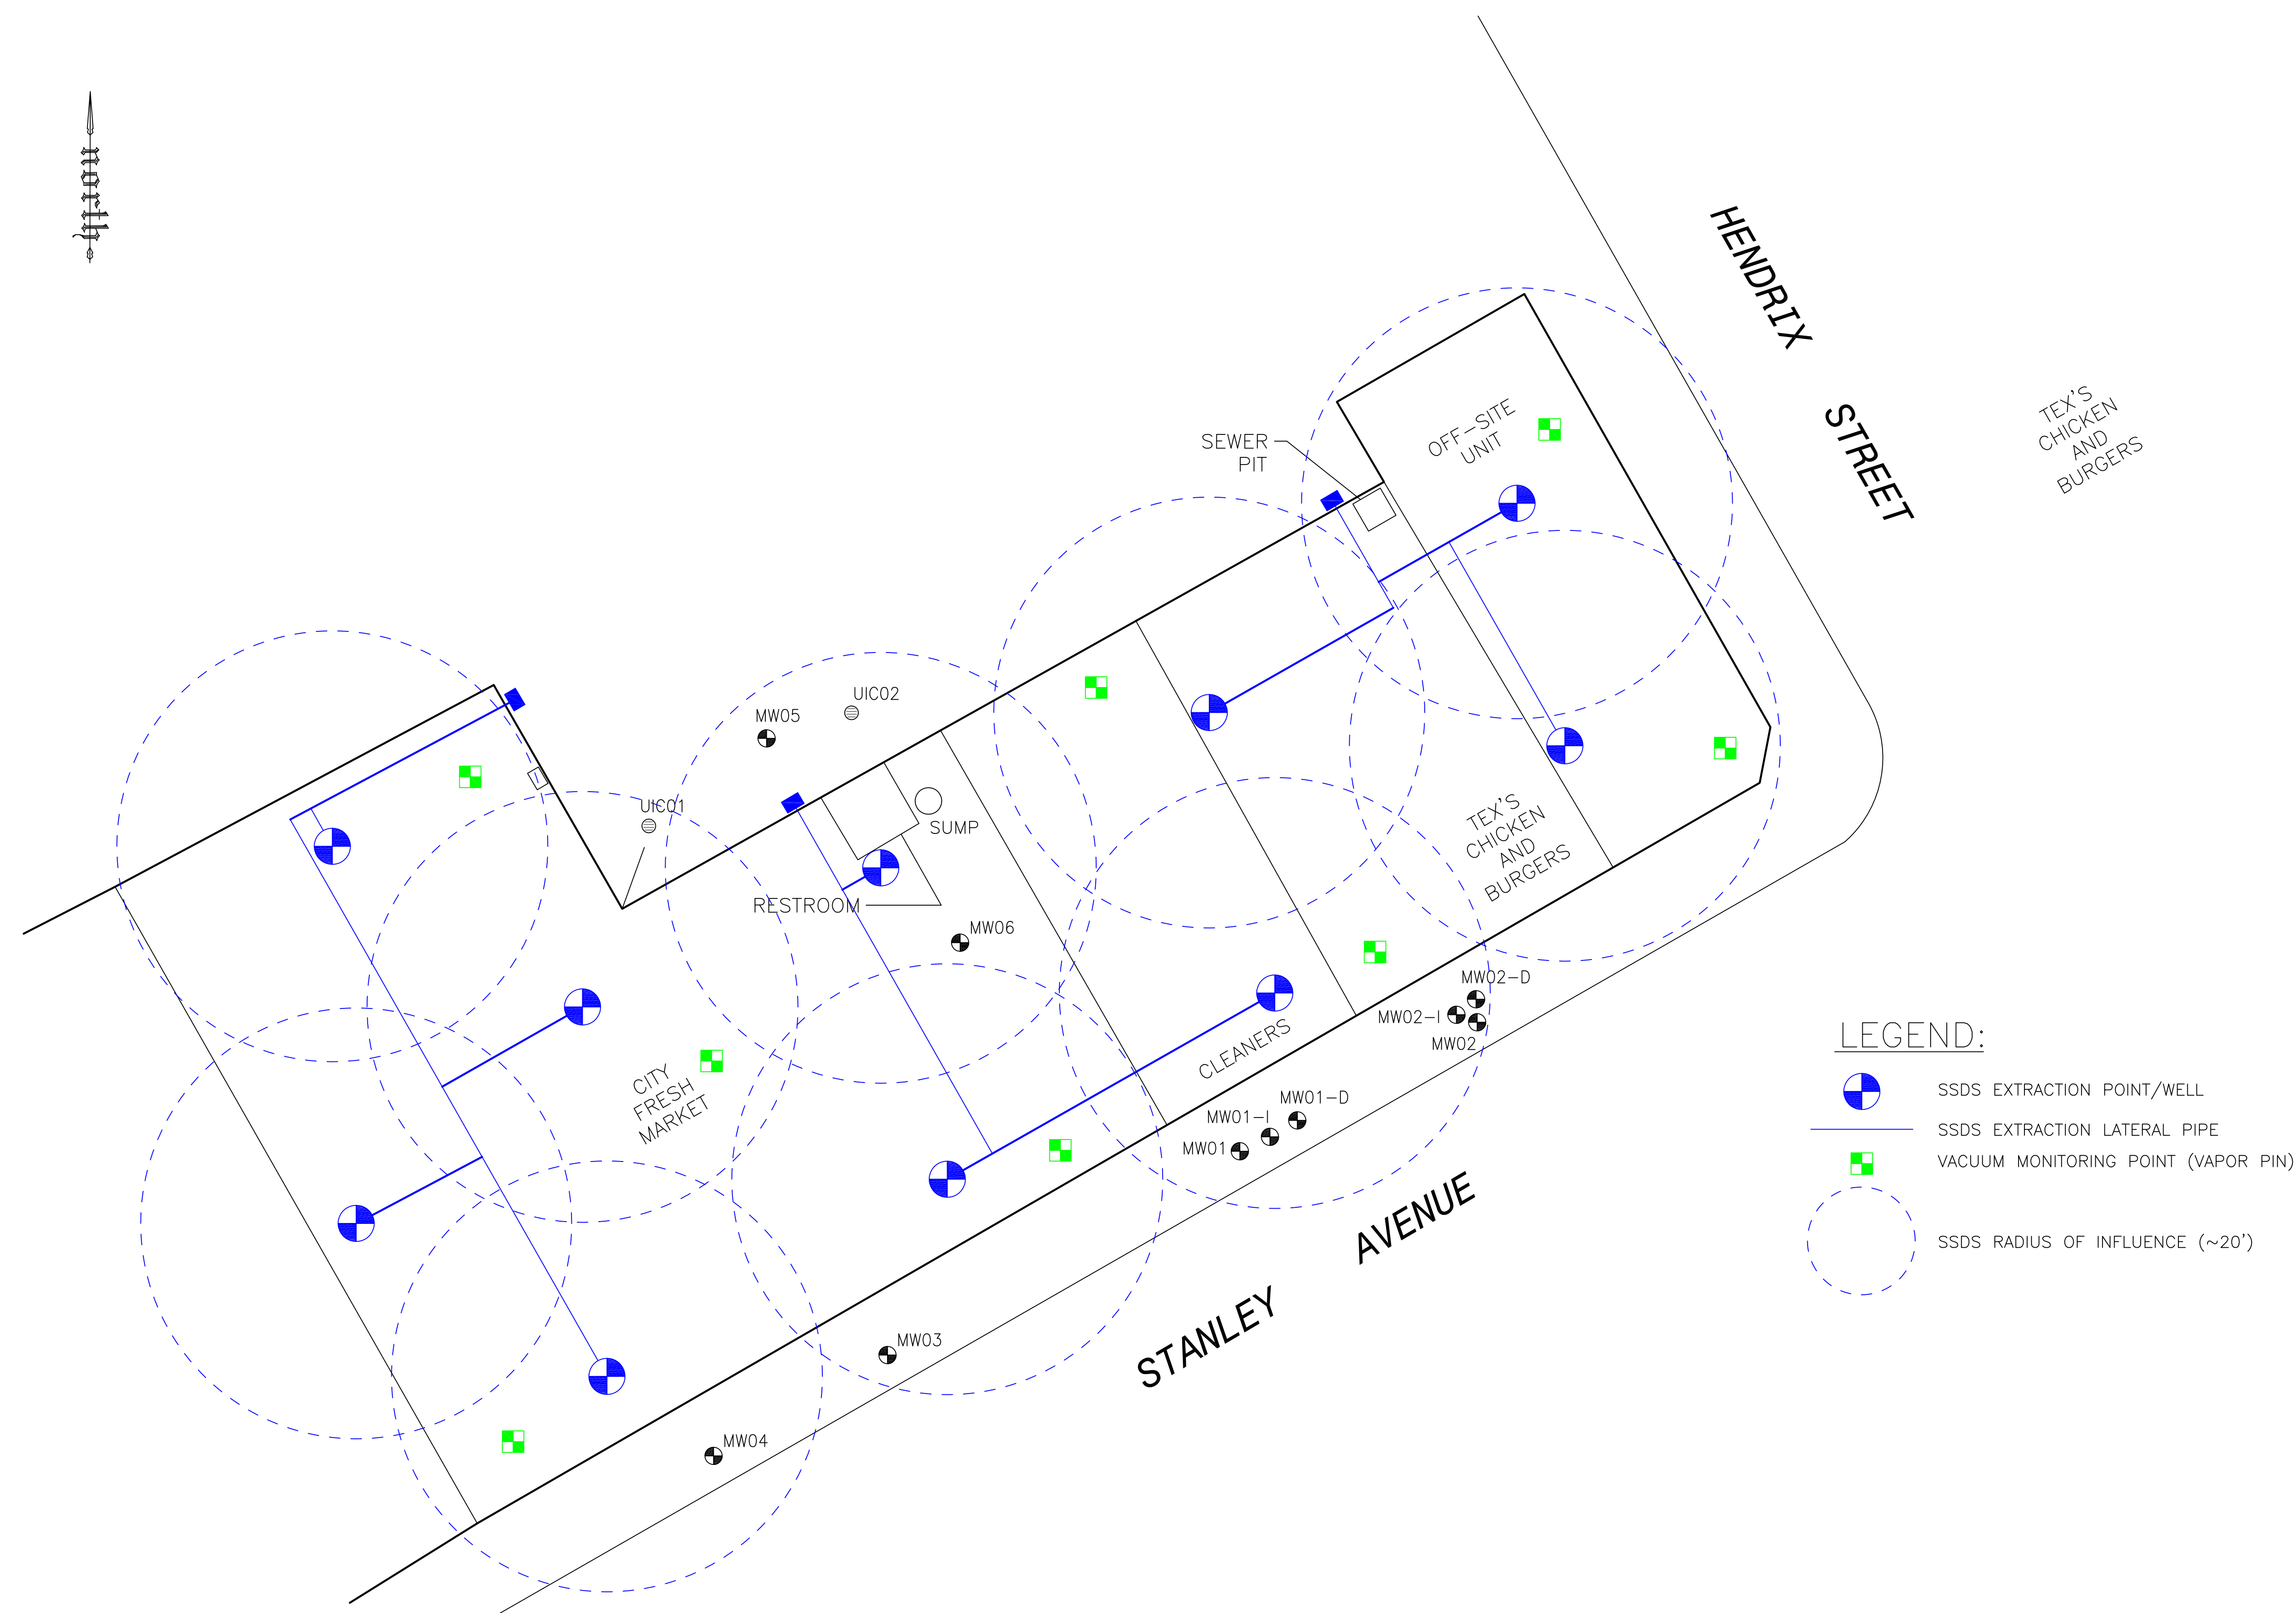5 OLD DOCK ROAD, YAPHANK, NEW YORK 11980
 PHONE: (631)924-3001 FAX: (631)924-5001



LEGEND:

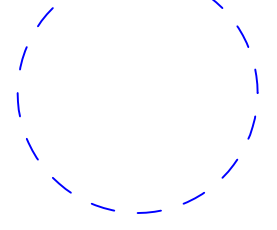-  SSDS EXTRACTION POINT/WELL
-  SSDS EXTRACTION LATERAL PIPE
-  VACUUM MONITORING POINT (VAPOR PIN)
-  SSDS RADIUS OF INFLUENCE (~20')

PROJECT ENGINEER

ENVIROTRAC ENGINEERING &
GEOLOGY, PC
5 OLD DOCK ROAD
YAPHANK, NY 11980

SEAL AND SIGNATURE May 29, 2026

Dale C. Konas, PE
NY Lic. No. 081035

DRAWN/REVISED BY: DK
REVISION DATE: MAY 26, 2026
REVISION No.: 1.0

DRAWING TITLE
SITE PLAN - SSDS LAYOUT


PREPARED FOR
**UNIDOS ZR LLC
751 3RD AVENUE
FRANKLIN SQUARE, NEW YORK 11010**

PROJECT SITE
**655-671 STANLEY AVENUE
BROOKLYN, NEW YORK 11207**

FIGURE NO.
SSDS-003.00


RISER PIPE DETAIL

NOT TO SCALE

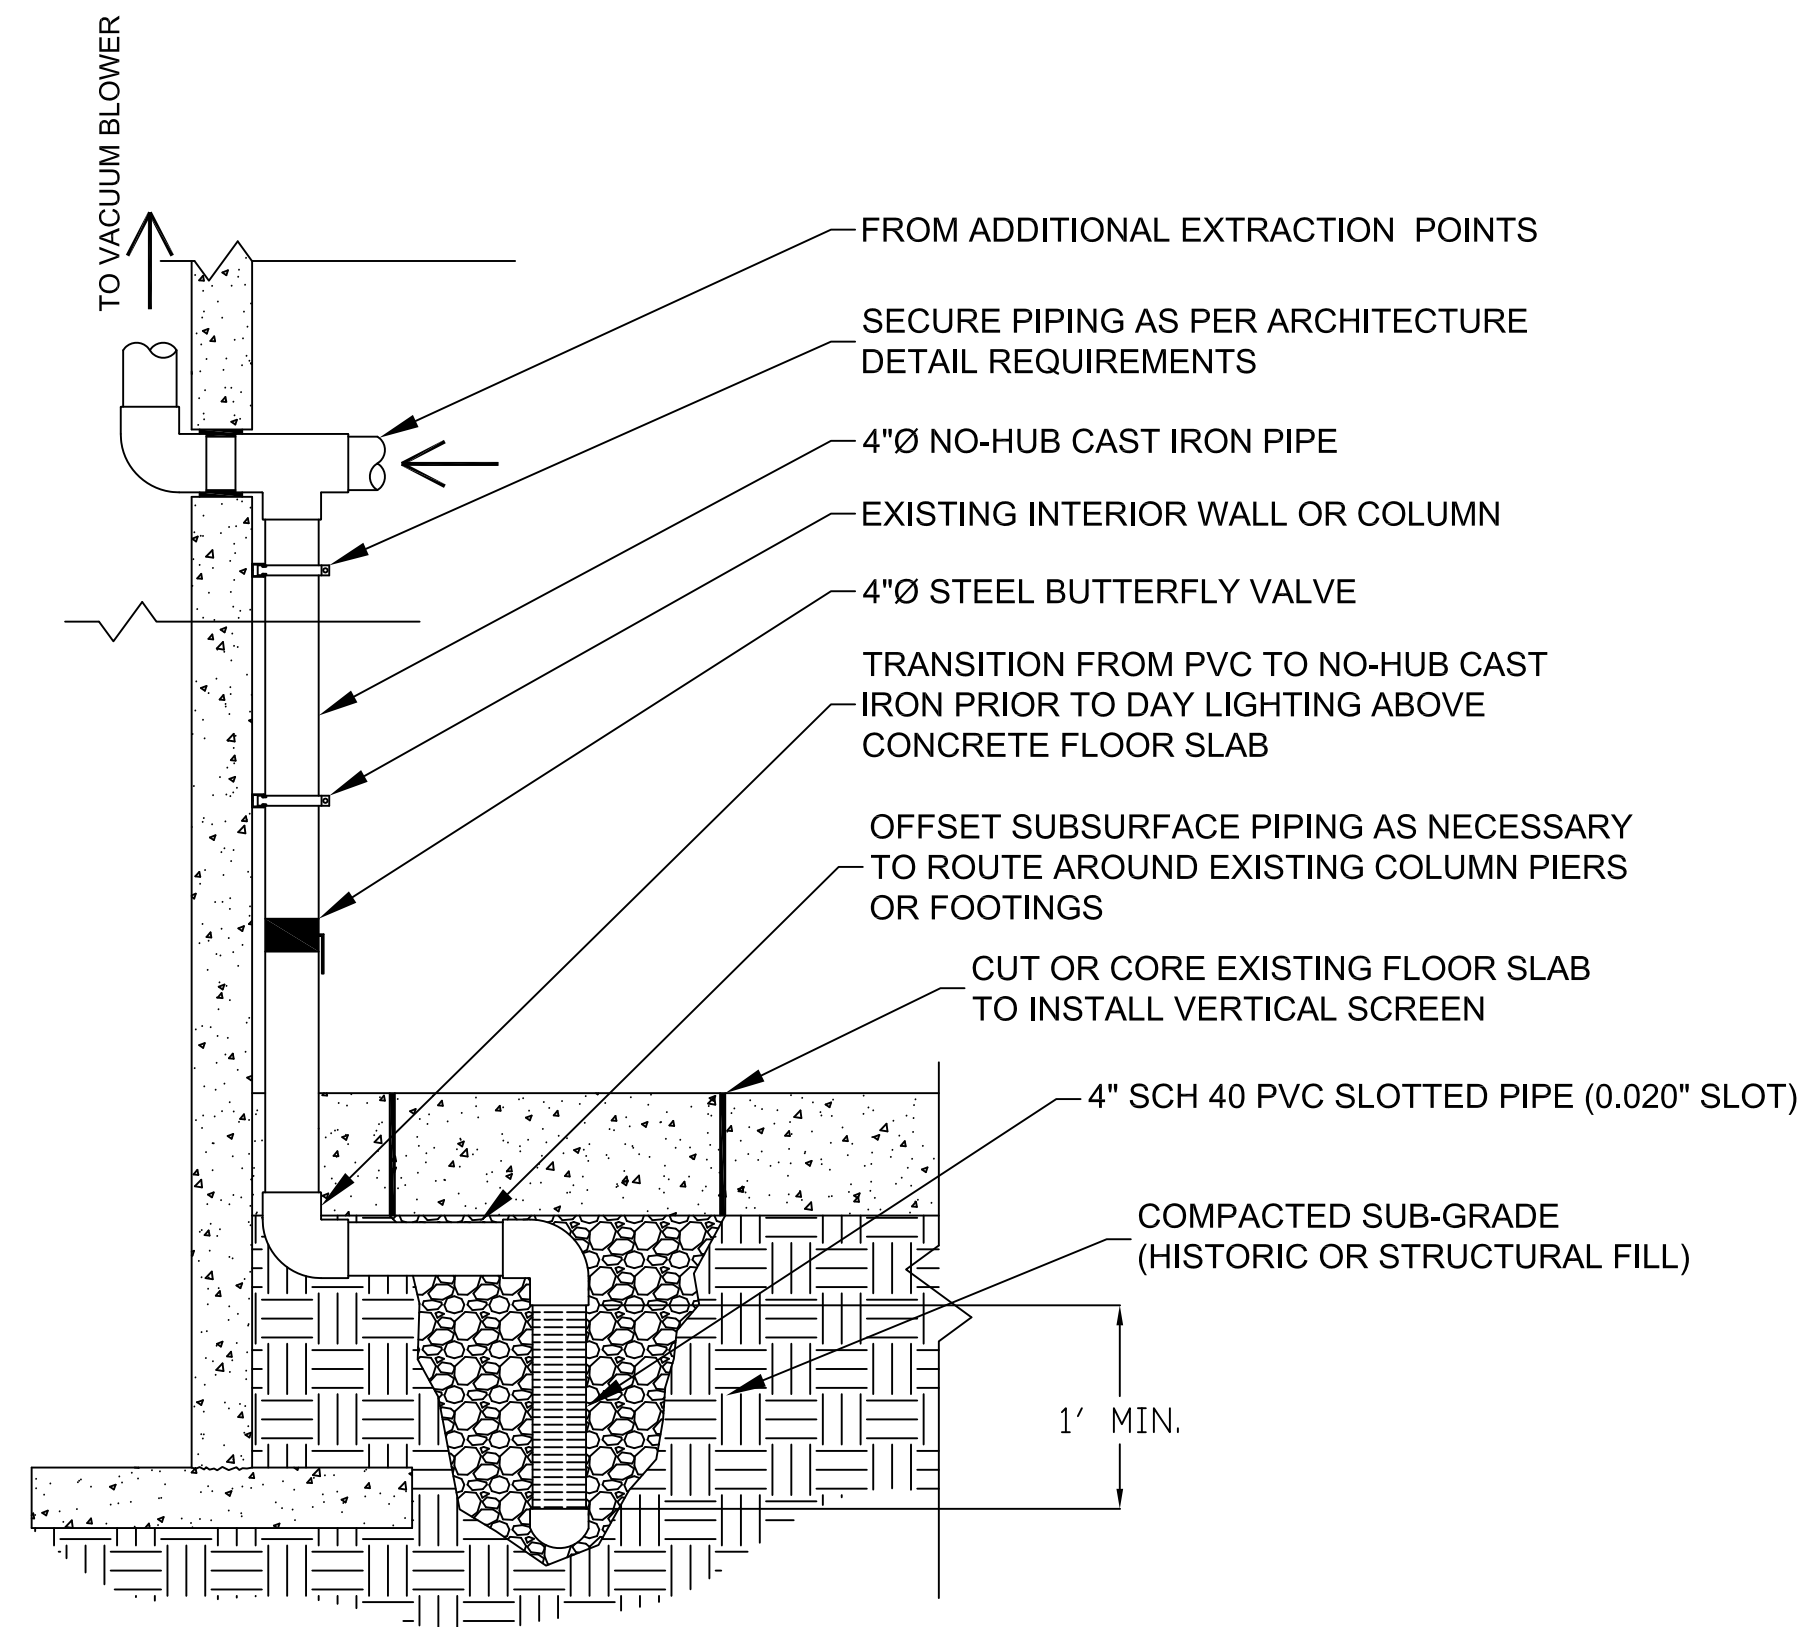


VAPOR / VACUUM MONITORING POINT

NOT TO SCALE

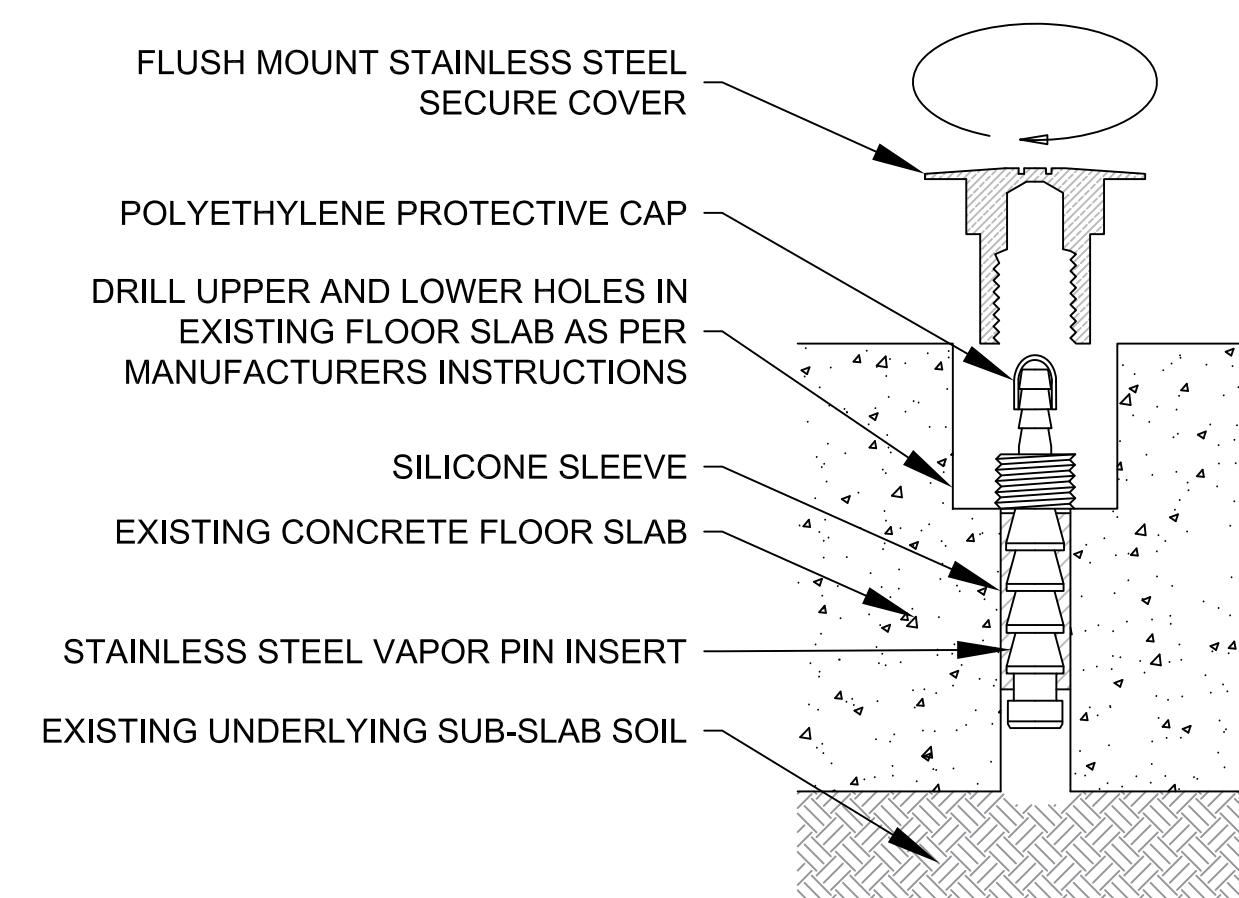


BLOWER AND ROOF PIPING DETAIL

NOT TO SCALE

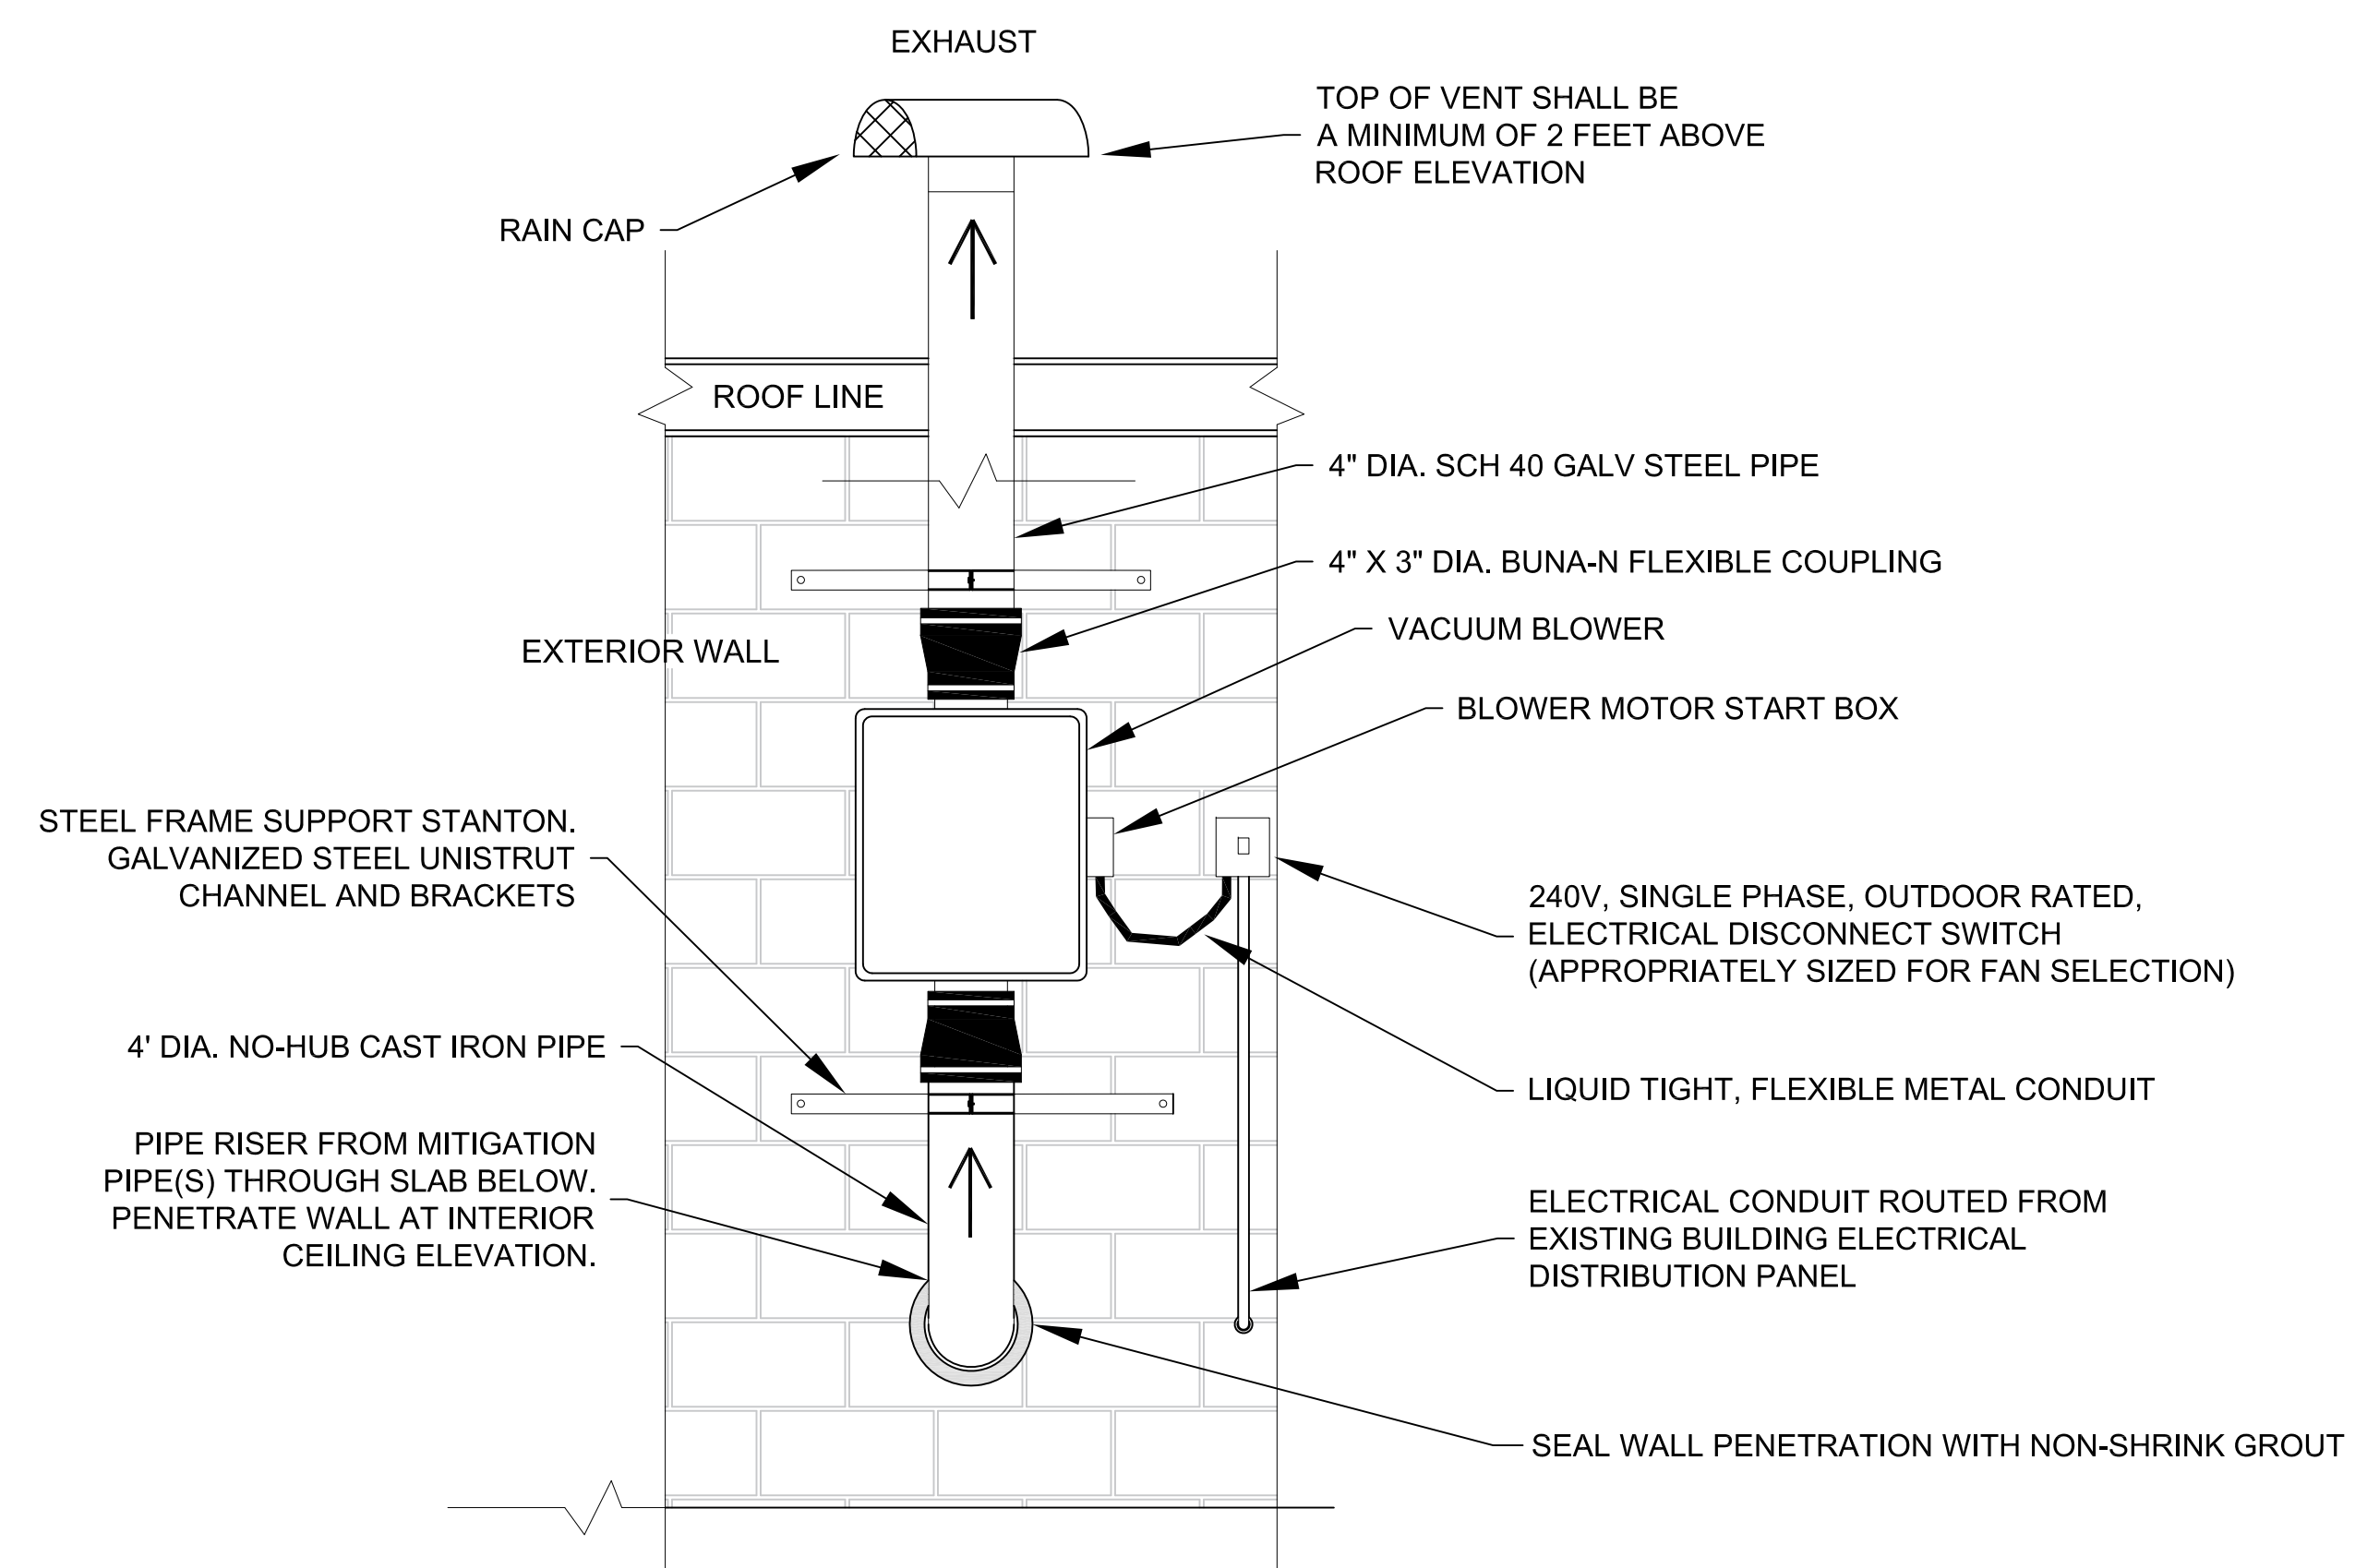

EXTRACTION POINT DETAIL

(SSDS-1 - SSDS-15) NOT TO SCALE

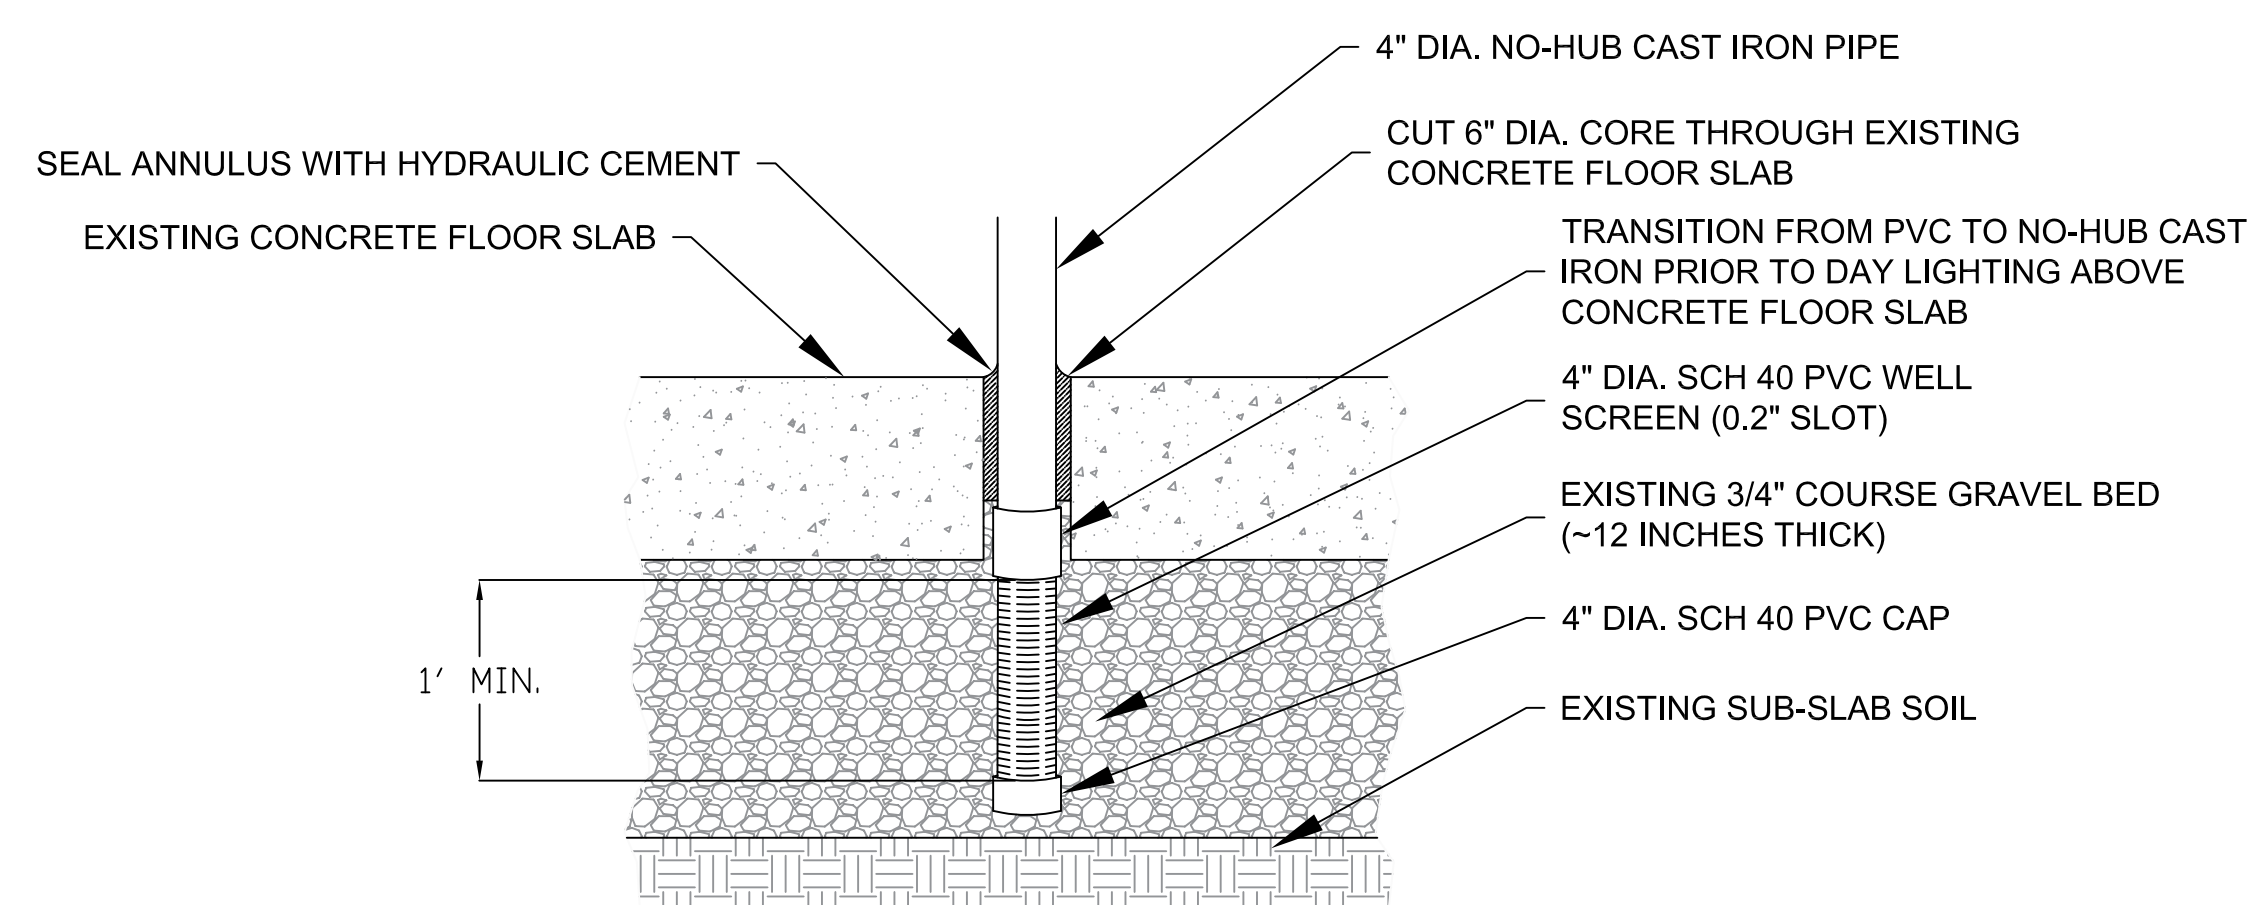

NOTES:
A. BUILDING DETAILS SHOWN FOR CONCEPTUAL PURPOSES ONLY. NOT TO BE USED FOR STRUCTURAL OR ARCHITECTURAL PURPOSES.

SSDS EQUIPMENT SCHEDULE			
DESIGNATION	DESCRIPTION	SIZE / RANGE	MANUFACTURER / MODEL
SF-1, SF-2, SF-3	SUCTION FANS	38.0"H2O MAX / 195 CFM MAX	OBAR SYSTEMS GBR76-UD 240V
V-1 - VS-10	VACUUM GAUGES	0-60"H2O VACUUM	DWYER LPG4-D7522N
VS-1, VS-2 & VS-3	VACUUM SENSOR / ALARM / TRANSMITTER	0-20"H2O VACUUM	OBAR SYSTEMS GBR25-T
RMP-1	REMOTE MONITORING PANEL	CELLULAR MONITORING SYSTEM	SENSAPHONE SENTINEL CELLAR MONITOR

PROJECT ENGINEER

ENVIROTRAC ENGINEERING & GEOLOGY, PC
5 OLD DOCK ROAD
YAPHANK, NY 11980

SEAL AND SIGNATURE

May 29, 2026

Dale C. Konas, PE
NY Lic. No. 081035

DRAWN/REVISED BY: DK

REVISION DATE: MAY 26, 2026

REVISION No.: 1.0

DRAWING TITLE

MISCELLANEOUS SSDS DETAILS

PREPARED FOR

UNIDOS ZR LLC
751 3RD AVENUE
FRANKLIN SQUARE, NEW YORK 11010

PROJECT SITE

655-671 STANLEY AVENUE
BROOKLYN, NEW YORK 11207

FIGURE NO.

SSDS-004.00

EnviroTrac

Environmental Services

5 OLD DOCK ROAD, YAPHANK, NEW YORK 11980
PHONE: (631)924-3001 FAX: (631)924-5001

APPENDICES

APPENDIX A

Remedial Design Work Plan

Remedial Design Work Plan (RDWP)

Sub-Slab Depressurization System (SSDS)

Site Location:

655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site #224415

Prepared for:

Unidos ZR LLC
751 3rd Avenue
Franklyn Square, NY 11010

Prepared by:

EnviroTrac Engineering & Geology, P.C.
5 Old Dock Road
Yaphank, NY 11980

May 2026



CERTIFICATIONS

I, Dale C. Konas, certify that I am currently a NYS-registered Professional Engineer and that this Remedial Design Work Plan was prepared in accordance with applicable statutes and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10).

081035

NYS Professional Engineer No.

Date

Signature

Table of Contents

PART 1 - GENERAL.....	1
1.01 DESCRIPTION OF WORK	1
1.02 STANDARDS AND REGULATIONS	1
1.03 AIR EMISSIONS	2
PART 2 - PRODUCTS.....	2
2.01 MATERIALS AND ACCESSORIES	2
A. SUBSURFACE GAS VAPOR COLLECTION PIPE NETWORK, APPURTANCES, AND BUILDING PENETRATION PIPE	2
B. FITTINGS.....	2
C. VALVES.....	3
D. SLEEVES FOR PIPES.....	3
E. VACUUM MONITORING POINTS	4
F. SSDS COMPONENTS.....	4
G. GENERAL	5
PART 3 - EXECUTION.....	5
3.01 INSTALLATION.....	5
A. INSTALLATION OF EXTRACTION WELLS.....	5
B. INSTALLATION OF SSD SYSTEM	6
C. INSTALLATION OF THE VACUUM MONITORING POINTS (VMPs)	6
D. PIPING (GENERAL).....	6
E. PIPING JOINTS (PVC)	7
F. PIPING JOINTS (Cast Iron)	8
G. SLEEVES FOR PIPES.....	9
3.02 PIPE AND FITTING SCHEDULE.....	10
3.03 PROTECTION.....	10

Figures

- SSDS-001.00 – TITLE SHEET
- SSDS-002.00 – DRAWING INDEX, SITE LOCATION, ABBREVIATIONS, AND NOTES
- SSDS-003.00 – SITE PLAN – SSDS LAYOUT
- SSDS-004.00 – MISCELLANEOUS SSDS DETAILS

Attachments

- A. SSDS Vent Fan Manufacturer Installation Instructions – Obar Systems, GBR76-UD (240V)
- B. Vacuum Monitoring Point Manufacturer Installation Guide – Vapor Pin, SS Inserts
- C. Vacuum Indicated Gauge – Dwyer Instruments
- D. Vacuum Alarm Monitors
- E. Remote System Monitoring Panel

SUB-SLAB DEPRESSURIZATION SYSTEM (SSDS)

PART 1 - GENERAL

1.01 DESCRIPTION OF WORK

The subject property consists of an approximately 11,330 square-foot, single-story commercial building that includes a single-story full basement with a concrete slab finished floor. This scope of work shall consist of installing a sub-slab depressurization system (SSDS) to allow the lateral movement, collection and venting of gas vapor from below the subject building. System components are to include a network of ten (10) 4-inch schedule 40 PVC vent points installed at select locations throughout the building floor slab. Each vent point is routed through individual pipe risers that combine into three (3) separate common headers located along the building basement ceiling. The headers shall then penetrate through the building exterior wall or roof and then sealed into position. The common headers shall continue up to a location above the roof line and then vent to atmosphere by mechanical means. The active sub-slab ventilation system shall be equipped with exterior mounted inline fans. All system components shall be installed as indicated, specified, and required within the following sections. A site plan indicating the radius of influence of the proposed SSD system is shown in Figure SSDS-002.00.

This design was prepared based on industry standards and similar systems constructed in similar structures that were successfully installed and operated within this geographical area. It is estimated that three (3) SSDS vacuum fans capable of a total flow rate of 125 cfm @ 22.0 "H₂O vacuum would provide sufficient vacuum to the underlying soil to provide optimal coverage. With an extraction point network consisting of ten (1) wells, a minimum of a 20-foot radius of influence would be generated.

1.02 STANDARDS AND REGULATIONS

- A. Comply with applicable portions of the Building Code of the City of New York, regulations set forth by the New York State Department of Environmental Conservation (NYSDEC) (DER-10), and New York State Department of Health (NYSDOH). Where requirements for products, materials, equipment, methods, and other portion of the work specified herein exceed minimum requirements of City of New York Building Code, contractor shall comply with such requirements specified herein, unless specifically approved otherwise.
- B. Standards listed below are referenced in this section.
 1. American Society for Testing and Materials (ASTM)
 - ASTM 2121-12 "Standard Practices for Installing Radon Mitigation Systems in Existing Low-Rise Residential Buildings"

2. American Standards Association (ASA)
3. American National Standards Institute (ANSI)

1.03 AIR EMISSIONS

Effluent air testing protocols will be detailed and evaluated under a separate Post-Installation Startup/Testing Plan if determined to be required.

PART 2 - PRODUCTS

2.01 MATERIALS AND ACCESSORIES

A. SUBSURFACE GAS VAPOR COLLECTION PIPE NETWORK, APPURTANCES, AND BUILDING PENETRATION PIPE

1. Polyvinyl Chloride (PVC) Pressure Pipe:

PVC pipe for gas vapor collection applications for underground installation shall be 4-inch diameter schedule 40 pipe for individual extraction point piping and 4-inch diameter Schedule 40 well screen (0.2-inch slot) for the inlet screens. The use of PVC pipe shall be limited to all sub-surface locations, and the effluent side of the roof mounted vacuum fan and shall be installed as shown within the design drawings. Raw, unslotted pipe shall have a wall thickness of 0.237-inches, a max working pressure of 133 psi @ 73 degrees F and weigh approximately 201 lbs/100-feet. Joints shall be solvent-welded.

2. Cast Iron (CI) Pipe:

All above-grade piping, including each of the pipe risers and common headers, shall be constructed using 4-inch diameter no-hub cast iron pipe. No-hub cast iron pipe and fittings shall be manufactured from gray cast iron and shall conform to ASTM A 888 and CISPI Standard 301. All pipe and fittings shall be marked with the collective trademark of the cast Iron Soil Pipe Institute ® and listed by NSF® International. No-hub couplings shall conform to CISPI Standard 310 and be certified by NSF® International. Gaskets shall conform to ASTM C 564. All pipe and fittings to be produced by a single manufacturer and are to be installed in accordance with manufacturer's recommendations and applicable code requirements. Couplings shall be installed in accordance with the manufacturer's band tightening sequence and torque recommendations. Tighten bands with a properly calibrated torque limiting device.

B. FITTINGS

1. Fittings for PVC Pipe:

- a. All fittings shall be of the same manufacturer, material, class, and schedule as the pipe. Any required threaded joints shall be provided with Teflon tape or flange joints with nitrile or urethane gaskets.
 - b. Solvent cement joints for the pipe and pipe installation shall be made in accordance with the manufacturer's recommendations and ASTM D2855.
2. Fittings for Cast Iron Pipe:
- a. All fittings shall be of the same manufacturer, material, class, and schedule as the pipe. All fitting shall be manufactured and installed in accordance with ASTM A 888 and CISPI Standard 301.
 - b. Couplings shall be installed in accordance with the manufacturer's band tightening sequence and torque recommendations. Tighten bands with a properly calibrated torque limiting device. All couplings shall be manufactured and installed in accordance with the manufacturer's recommendations and ASTM C 1277 and/or ASTM C 1540.

C. VALVES

1. Butterfly Valves:

All system valves shall be butterfly style valves and appropriately sized to match the corresponding system piping diameter. Each valve shall be grooved end connected. The body and disc of each valve shall be constructed of coated ductile iron, and the stem shall be 416 stainless steel. The boot liner shall be EPDM. The valve shall be hand lever actuated with a set position throttle plate. Each butterfly valve shall be model GD-4765-3 Series Ductile Iron Butterfly Valve, manufactured by Nibco Inc, or equal.

D. SLEEVES FOR PIPES

1. Sheet metal sleeves shall be 20 gauge.
2. Pipe sleeves shall be service weight cast iron pipe or schedule 40 galvanized steel pipe.
3. Fire stop penetration materials for sealing sleeves shall be listed by Underwriters Laboratories and shall have Material and Equipment Acceptance (MEA) approval.
4. Material for sealing spaces between pipe and sleeve through foundation walls below grade shall be Link- Seal Type "C" as manufactured by Thunderline Corp, Belleville, Mich., or equal. Seals shall be modular mechanical type, consisting of interlocking synthetic rubber links shaped to continuously fill the annular space between the pipe and sleeve. Links shall be loosely assembled with bolts to form a continuous rubber bolt around the pipe with a pressure plate under each bolt head and nut. Link-

Seal pressure plates shall be Type "C" (insulating type) to provide for electrical insulation and cathodic protection.

5. Materials for sealing space between each pipe and sleeve through non-fire rated exterior walls above grade shall be non-shrink cement.
6. Waterproof sleeves shall be Link-Seal Wall Sleeve as manufactured by Thunderline Corp, or MetraSeal wall sleeve by the Metraflex Co., or equal.

E. VACUUM MONITORING POINTS

1. Monitoring Point:

The vacuum monitoring points shall be a stainless-steel Vapor Pin inserts manufactured by Cox-Colvin / Vapor Pin (sample implant model VPIN0522SS) or approved equal. Each insert shall be installed as per the manufacturer's instructions and utilizing the recommended installation kit. A sample manufacturer's cut sheet and installation instructions can be seen in Attachment B.

3. Access Manhole:

Each vacuum monitoring point shall have a stainless-steel Vapor Pin cover fit directly on top of each vacuum monitoring point to provide access to the vacuum point tubing connector. Each cap shall thread directly onto the installed Vapor Pin insert to provide a flush and secure fit. The cap shall be a stainless-steel secure cover as manufactured by Cox-Colvin / Vapor Pin or approved equal. A sample manufacturer's cut sheet and installation instructions can be seen in Attachment B.

F. SSDS COMPONENTS

1. **Vacuum Blower (Fan):** Obar Systems, Inc., Model GRB76-UD, (240V, 1 PH), or equal. The vacuum fan shall be capable of 125 cfm @ 22 "H₂O vacuum. Construction shall be molded polycarbonate plastic housing. Motor shall be water hardened thermally protected and rated for outdoor use. The fan shall be rated for commercial or residential use and UL507 rated under file E94403 standards. The fan shall include a 3-inch diameter inlet and outlet. Contractor shall connect the inline ventilation fans to the existing building electrical service. A sample manufacturer cut sheet and installation instructions for the fan can be seen in Attachment A.
2. **Vacuum Gauges:** Dwyer Instruments Inc., Model/Part No. LPG4-D7522N, 2½" diameter dial, Accuracy = +/-1.5% full scale, ¼" NPT brass connection, Black painted steel case with polycarbonate lens. Individual manifold laterals shall have 0-60 "H₂O range. A sample manufacturer cut sheet for the gauge can be seen in Attachment C.
3. **Low Vacuum Alarm/Transmitters:** Obar Systems, Inc. Digital Pressure Gauge with Alarm, Model GBR25-T, or equal. The alarm unit shall have

an integral digital vacuum gauge and be capable of operating at a range of 0 to 40 "H₂O of vacuum. The alarm shall include a field adjustable audible low vacuum alert and be capable of remotely transmitting the real-time vacuum reading via a 4-20mA output signal. The alarm unit shall be powered using a dedicated 110V electrical outlet installed in the vicinity of the alarm unit.

4. **Remote Monitoring Station:** Sensaphone Inc., Sentinel Cellular Monitoring Station. The monitoring station shall be capable of receiving inputs from the three (3) low vacuum alarm transmitters via a digital 4-20mA signal. The monitoring system shall be full programable and capable of remotely transmitting status and alarm conditions via an integral 4G cellular modem connection. The monitoring system shall be capable of sending alerts via email, SMS text messages, and/or mobile device push notifications through the Sentinel mobile app. Real-time status of the vacuum monitors shall also be viewable through the mobile app or standard internet web browser.

G. GENERAL

- Provide additional installation accessories, as necessary.
- Ensure accessories are from same manufacturer as product.

PART 3 - EXECUTION

3.01 INSTALLATION

All components of the SSD System shall be installed as specified within these Specifications and Plans.

A. INSTALLATION OF EXTRACTION WELLS

A total of ten (10) extraction wells shall be installed and utilized as SSD extraction points in the building as shown in Figure SSDS-001.00 (SSD-1 through SSD-10). At a minimum, each point shall consist of a 4-inch diameter schedule 40 PVC pipe well riser that extends to a depth of 1-inch below the bottom elevation of the existing concrete floor slab at each location. From this elevation to a depth of 1-foot below the bottom of the floor slab, the point shall consist of 4-inch diameter schedule 40 PVC well slotted screen (0.020 slot). Further details of the proposed extraction point construction can be seen in Figure SSDS-004.00. Each extraction point shall be installed utilizing a concrete core drill to penetrate the floor slab and then a manual hand auger to advance a borehole to install the well. The annulus between the well casing/screen and the borehole shall be filled with No. 2 Morie well sand to an elevation above the well screen. The annulus between the outside of the cast iron riser pipe and the concrete edge shall be sealed with quick setting epoxy putty or hydraulic cement.

Any excess soil that is generated during the installation of the extraction points shall be collected and then properly disposed of in accordance with any governing regulations.

B. INSTALLATION OF SSD SYSTEM

Individual pipe risers shall extend from each of the extraction points and route to three (3) separate common headers located along the interior of the building basement ceiling, creating three (3) SSDS zones. Each riser shall be routed along the nearest building interior wall or column and shall be constructed of 4-inch no-hub cast iron pipe. Care shall be made to ensure that all interior piping is placed and routed in a best effort to reduce intrusion into the interior space of the building. The common header pipe shall penetrate the building's exterior wall or roof in close proximity to the vacuum fan location. The vacuum fan shall be mounted directly on the effluent pipe and sufficiently supported on the exterior wall of the building. The effluent air stream piping shall then be extended vertically up to a location above the roof line of the building to its discharge point. The discharge riser shall terminate at least 2-feet above the surface of the roof at a location at least 10-feet away from any window or other opening into the conditioned space of the building that is less than 2-feet below the exhaust point, and 10-feet away from any adjoining or adjacent buildings. All piping shall be no-hub cast iron pipe. Details of the SSD system configuration can be seen in Figure 2.

All interior riser pipe, beginning at the floor slab elevation and continuing to the point where the pipe penetrates the building exterior foundation wall, shall be clearly and permanently labeled, and read as such:

“CAUTION: ACTIVE VENT SYSTEM”

Electrical power for vacuum fan shall be provided by an outdoor rated 240V disconnect switch that shall be installed adjacent to roof mounted fan.

C. INSTALLATION OF THE VACUUM MONITORING POINTS (VMPs)

Vacuum testing of the proposed SSDS shall utilize a network of vacuum monitoring points in order to demonstrate adequate performance of the proposed system. The proposed vacuum monitoring point locations are shown in Figure SSDS-003.00.

Each vacuum monitoring point shall consist of one Vapor Pin stainless steel sampling implant by Cox-Calvin / Vapor Pin (Part No. VPIN0522SS) or approved equal. The Vapor Pin insert shall be fitted with appropriate silicone rubber sleeve and protective plastic cap. Each implant shall be capable of connecting a 0.25-inch inside diameter Teflon tubing for the purposes of vacuum influence measurements. The Implant shall be installed in accordance with the manufacturer's instructions. Once the Vapor Pin has been installed it shall be capped with a Vapor Pin stainless steel Secure Cover. This Cover shall be secured into place using the required #14 spanner tool provided within the installation kit. Details on the installation of each vacuum monitoring point can be seen in Figure 2.

D. PIPING (GENERAL)

1. The run and arrangements of all pipes shall be approximately as shown in the Figures or specified and as directed during installation, and shall

be as straight and direct as possible, forming right angles or parallel lines with building walls and other pipes, and neatly spaced. No pipe shall be installed where the headroom will be interfered with unless the conditions are such that it is unavoidable, and permission is obtained from the property owner. Offsets shall be permitted where walls reduce in thickness or beams interfere with direct runs; offsets shall be made at an angle of 45 degrees to the vertical; in no case shall the space between the pipes, partitions, walls, etc., exceed 5". All exposed risers shall be erected plumb, standing free, close to and parallel with walls and other pipes and be uniformly spaced. All horizontal runs of piping hung from structural floor, slab or floor beams shall be erected as closely as possible to bottom of floor slabs, ceilings, or I-beams as the case may be. In no case shall the headroom, beneath the pipe, be less than (7'-0") where the pipe is installed more than (1'-0") from wall, partition, etc., except where piping is required to be installed in Boiler Room and Mechanical spaces above floor. Horizontal piping shall be so graded as to drain back to each individual extraction point. All piping shall be installed with ample space for pipe covering.

2. Roughing underground or concealed in the floor or wall construction shall be properly installed, tested, and inspected before any of the roughing is covered up. Should any work be covered up before being inspected and tested, it shall be uncovered and recovered at the expense of the Contractor. Plugged fittings shall be installed when called for. Reducer fittings or bushings shall be used in making reductions in sizes of pipes.

E. PIPING JOINTS (PVC)

1. Threaded Joints

The joints piping shall be screwed joints of full length and threads shall be NPT. All pipes shall be screwed close up to their shoulders, not to leave more than 3 threads exposed. The use of lamp wick is prohibited in threaded joints. All burrs shall be removed. Pipe joint cement or Teflon tape shall be used only on male threads.

2. Solvent-cementing:

- a) Remove all burrs, chips, filings, and other debris from the pipe i.d. and o.d. before joining.

- b) All pipe ends should be beveled to minimize the chances of wiping the solvent cement from the i.d. of the fitting as the pipe is socketed. Beveling can be done with the coarse file or beveling tool.

- c) Using a clean, dry cotton rag, wipe away all loose dirt and moisture from the i.d. and o.d. of the pipe end and the i.d. of the fitting. Do not attempt to solvent-cement wet surfaces.

d) Using a natural-bristle brush about one-half the width of the pipe diameter to be joined, apply primer freely to the inner fitting socket. Keep the surface wet by continuously brushing the entire surface for 5 to 15 seconds. Redip the applicators as necessary but avoid puddling inside the fitting. Reapply primer to the fitting socket.

e) Apply primer to the pipe surface in the same manner, making sure that the length of pipe evenly covered is at least equal to the fitting socket depth.

f) Using a second clean natural-bristle brush one-half the size of the pipe diameter, apply a heavy coat of solvent cement to the male end of the pipe. Next apply a liberal coat of solvent cement to the inside of the socket using straight outward strokes to keep excess cement out of the socket.

g) While both surfaces are still wet with solvent cement, insert the pipe into the socket with a twisting motion. The pipe must go to the bottom of the socket. The application of solvent cement to pipe and fitting, and the insertion of pipe into the fitting, should be completed in less than 1 minute. Hold the joints together for approximately 30 seconds until both surfaces are firmly gripped.

h) After solvent-cementing, hold joints together for 30 seconds until both surfaces are firmly gripped. Allow proper set time before disturbing joints. The initial set time prior to installation is as follows:

Temperature Range	Pipe Sizes 1/4" - 1/2"	Pipe Sizes 1 1/2" - 3"	Pipe Sizes 4" - 8"	Pipe Sizes 10" - 16"	Pipe Sizes 18" - 24"
60°-100°F	15 Min.	30 Min.	1 Hr.	2 Hr.	3 Hr.
40°-60°F	1 Hr.	2 Hr.	4 Hr.	8 Hr.	12 Hr.
0°-40°F	3 Hr.	6 Hr.	12 Hr.	24 Hr.	36 Hr.

F. PIPING JOINTS (Cast Iron)

1. Hubless Shielded Couplings:

a) Lay out, hang and or mount piping and fittings as required. Pipe ends are to be cut as squarely and smoothly as possible. Check coupling and gasket for foreign material, clean if necessary.

b) Insert gasket over pipe or fitting until end of pipe or fitting butts against the gasket's integrally molded shoulder. Slide the coupling assembly over the other pipe or fitting to be joined.

- c) Insert the second pipe or fitting into the gasket until both ends of pipe or fittings butt against the integrally molded shoulder in the center of gasket.
- d) Slide the coupling assembly into position centered over gasket.
- e) Tighten all the clamps in the coupling assembly with an appropriately sized wrench or clamp tool. Use a preset, or dial indicating type torque wrench and tighten to 60-inch pounds of torque. Tighten clamp 1 and then clamp 2 alternately in 20 lbf-in increments until the recommended 60 lbf-in is reached.

G. SLEEVES FOR PIPES

1. General: All plumbing pipes passing through floors, roofs, walls, partitions, furring, beams, trenches, and wherever else indicated on the drawings shall be provided with sleeves. Where plumbing pipes pass through potentially wet floors that do not have membrane waterproofing such as toilet rooms, cafeteria kitchens, serving areas, dish washing room, janitor's sink closet, mechanical equipment rooms, pipe chases and areas that are provided with fire protection sprinkler systems, the Contractor shall install sleeves of galvanized steel pipe with welded clips or equivalent at bottom ends for securing sleeves to form work and shall project one inch above finished floors, and shall be caulked watertight.
2. For interior walls and floors and for pipes through roof, the space between each installed pipe and its sleeve shall be sealed with a three-hour rated fire stop penetration material. Fire stop materials shall be installed in accordance with the instructions of the manufacturer.
3. Sheet Metal Sleeves
 - a. Sleeves for pipes passing through floors, partitions, hung or furred ceilings, shall be installed with 1/2" maximum clearance all around pipes. Each sleeve for a pipe passing through an interior floor slab shall be fitted with a one-inch flange, or equivalent, at the bottom end for the purpose of securing it to the form work or sheet metal deck.

The sleeve shall finish flush with the top of the finished floor. Sleeves for pipes passing through partitions, hung or furred ceilings shall be of one-piece construction and shall finish flush with the finished surface.
 - b. Sleeves installed for pipes passing through vent ducts shall be securely fastened, soldered, and made airtight.
4. Pipe Sleeve: Install pipe sleeves for pipes passing through roofs, concrete beams, utility trenches, grade beams, brick walls, foundation walls and floor slabs on earth. Sleeves shall be installed with 1/2" maximum clearance all around pipe and shall finish flush with the

surfaces penetrated. Pipe sleeves for pipes through roof shall be made of service weight cast iron only.

3.02 PIPE AND FITTING SCHEDULE

A. Sub-Slab Depressurization System (Below Grade)

PVC pipe Schedule 40 with solvent welded or threaded joints

B. Sub-Slab Depressurization System (Above Grade or Exposed)

No-Hub Cast Iron with Standard Duty Stainless Steel Banded Hubless Couplings

3.03 PROTECTION

It is the responsibility of the Contractor to ensure that no damage occurs to components of the SSD System prior to, during or following installation of system, or during any subsequent performance of construction for the facility as identified on the drawings and specifications. This includes the installation of all subsurface utilities required for the operation of building systems.

END OF SECTION

FIGURES

SUB-SLAB DEPRESSURIZATION SYSTEM

DESIGN FIGURES

SITE LOCATION:
655-671 STANLEY AVENUE
BROOKLYN, NEW YORK 11207
NYSDEC SITE NO. 224415

PREPARED FOR:
UNIDOS ZR LLC
751 3RD AVENUE
FRANKLIN SQUARE, NEW YORK 11010

MAY 2026

PREPARED BY:
ENVIROTRAC ENGINEERING & GEOLOGY, PC
5 OLD DOCK ROAD
YAPHANK, NEW YORK 11980

PROJECT ENGINEER

ENVIROTRAC ENGINEERING &
GEOLOGY, PC
5 OLD DOCK ROAD
YAPHANK, NY 11980

SEAL AND SIGNATURE

May 29, 2026

Dale C. Konas, PE
NY Lic. No. 081035

DRAWN/REVISED BY: DK

REVISION DATE: MAY 26, 2026

REVISION No.: 1.0

DRAWING TITLE

TITLE SHEET

PREPARED FOR

UNIDOS ZR LLC
751 3RD AVENUE
FRANKLIN SQUARE, NEW YORK 11010

PROJECT SITE

655-671 STANLEY AVENUE
BROOKLYN, NEW YORK 11207

FIGURE NO.

SSDS-001.00


The logo for EnviroTrac, featuring the word "EnviroTrac" in a bold, sans-serif font. The letter "i" in "Enviro" has a green dot above it. The "T" in "Trac" is also green.

Environmental Services

5 OLD DOCK ROAD, YAPHANK, NEW YORK 11980
PHONE: (631)924-3001 FAX: (631)924-5001

NOTES:

1. VAPOR COLLECTION PIPING: 4 INCH DIAMETER SCHEDULE 40 PVC PERFORATED OR SLOTTED (0.02" SLOT) PIPING SHALL BE USED FOR THE SUBSURFACE EXTRACTION POINTS TO BE INSTALLED BELOW THE CONCRETE SLAB. A 4" SCHEDULE 40 PVC DOME CAP SHALL BE INSTALLED AT THE END OF EACH LEG.
2. SSD VENT PIPING:
 - 2.1. SUB-SURFACE SOLID PIPING: 4 INCH DIAMETER SCHEDULE 40 PVC PIPE SHALL BE CONNECTED TO THE VAPOR COLLECTION PIPING/EXTRACTION POINTS VIA A 4 INCH DIAMETER COUPLING OR 90 DEG ELBOW FITTING, LOCATED AT THE TOP OF EACH EXTRACTION POINT. EACH LEG OF THE VENT PIPING WILL BE EXTENDED TO A DESIGNATED LOCATION IN THE NEAR VICINITY OF AN EXISTING INTERIOR WALL OR COLUMN. ALL PIPE AND FITTING CONNECTIONS SHALL BE EITHER SOLVENT WELD OR THREADED CONNECTIONS.
 - 2.2. ABOVE GRADE PIPING: ALL EXPOSED ABOVE GRADE VENT PIPE SHALL BE CAST IRON, NO-HUB PIPE AND FITTINGS. ALL PIPE AND FITTING CONNECTIONS SHALL BE NEOPRENE FLEXIBLE COUPLINGS WITH STAINLESS STEEL BANDS. THIS PIPING SHALL BE EXTENDED VERTICALLY THROUGH THE BUILDING FIRST FLOOR CONCRETE FLOOR SLAB. EACH PIPING ZONE HEADER SHALL BE ROUTED ALONG THE BUILDING FIRST FLOOR CEILING AND PENETRATE HORIZONTALLY THROUGH THE EXTERIOR WALL IN EACH DESIGNATED BLOWER LOCATION. THE PIPING RISER SHALL EXTEND THROUGH THE ROOF INTO THE INLET OF EACH ROOF MOUNTED BLOWER. THE EXHAUST PIPING SHALL TERMINATE AT LEAST 2 FEET ABOVE THE SURFACE OF THE ROOF, IN A LOCATION AT LEAST 10 FEET AWAY FROM ANY WINDOW OR OTHER OPENING INTO THE CONDITIONED SPACES OF THE BUILDING THAT IS LESS THAN 2 FEET BELOW THE EXHAUST POINT, AND 10 FEET AWAY FROM ANY ADJOINING OR ADJACENT BUILDING.
3. IN BUILDINGS DESIGNED WITH INTERIOR FOOTINGS OR OTHER BARRIERS TO LATERAL FLOW OF SUB-SLAB SOIL GAS, VENT PIPES SHALL BE INSTALLED IN EACH ISOLATED, NON-CONNECTED FLOOR AREA. IF MULTIPLE VENT POINTS ARE USED IN NON-CONNECTED FLOOR AREAS, VENT PIPES ARE PERMITTED TO BE MANIFOLDED BELOW THE FLOOR SLAB INTO A SINGLE VENT.
4. TO RETARD SOIL GAS ENTRY, LARGE OPENINGS THROUGH CONCRETE SLABS OR OTHER FLOOR ASSEMBLIES IN CONTACT WITH THE SOIL, SUCH AS SPACES AROUND BATHTUB, SHOWER, OR TOILET DRAINS, SHALL BE FILLED OR CLOSED WITH MATERIALS THAT PROVIDE A PERMANENT AIRTIGHT SEAL SUCH AS NON-SHRINK MORTAR, GROUTS, EXPANDING FOAM, OR SIMILAR MATERIAL DESIGN FOR SUCH APPLICATION.
5. TO RETARD SOIL GAS ENTRY, SMALLER GAPS AROUND ALL PIPES, WIRE, OR OTHER OBJECTS THAT PENETRATE THE CONCRETE SLAB OR OTHER FLOOR ASSEMBLY SHALL BE MADE AIRTIGHT WITH AN ELASTOMER JOINT SEALANT OR POLYETHYLENE TAPE, AS DEFINED IN ASTM C920-87, AND APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
6. TO RETARD SOIL GAS ENTRY ALL CONTROL JOINTS, ISOLATION JOINTS AND ANY OTHER JOINTS IN CONCRETE SLABS OR BETWEEN SLABS AND FOUNDATION WALLS SHALL BE SEALED. A CONTINUOUS FORMED GAP "TOOLED EDGE" WHICH ALLOWS THE APPLICATION OF A SEALANT THAT WILL PROVIDE A CONTINUOUS, AIRTIGHT SEAL SHALL BE CREATED ALONG ALL JOINTS. WHEN THE SLAB HAS CURED, THE GAP WILL BE CLEARED OF ANY LOOSE MATERIAL AND FILLED WITH AN ELASTOMER JOINT SEALANT, AS DEFINED IN ASTM C920-87, AND APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
7. CONCRETE MASONRY FOUNDATION WALLS BELOW THE GROUND SURFACE SHALL BE CONSTRUCTED TO MINIMIZE THE TRANSPORT OF SOIL GAS FROM THE SOIL TO THE BUILDING. HOLLOW BLOCK MASONRY WALLS SHALL BE SEALED AT THE TOP TO PREVENT THE PASSAGE OF AIR FROM THE INTERIOR OF THE WALL TO THE LIVING SPACE. AT A MINIMUM, ONE COURSE OF SOLID MASONRY, ONE COURSE OF MASONRY GROUTED SOLID, OR A POURED CONCRETE BEAM AT OR ABOVE THE FINISHED GROUND SURFACE LEVEL SHALL BE USED FOR THIS PURPOSE. WHERE A BRICK VENEER OR OTHER MASONRY LEDGE IS INSTALLED, THE COURSE IMMEDIATELY BELOW THAT LEDGE SHALL ALSO BE SEALED.
8. JOINTS, CRACKS, OR OTHER OPENINGS AROUND ALL PENETRATIONS OF BOTH EXTERIOR AND INTERIOR SURFACES OF MASONRY BLOCK WALLS BELOW THE GROUND SURFACE SHALL BE SEALED WITH AN ELASTOMETRIC SEALANT THAT PROVIDES AN AIRTIGHT SEAL. PENETRATIONS OF POURED CONCRETE WALLS SHALL ALSO BE SEALED ON THE EXTERIOR SURFACE. THIS INCLUDES SEALING OF WALL TIE PENETRATIONS.
9. ALL EXPOSED AND VISIBLE INTERIOR SSD VENT PIPES SHALL BE IDENTIFIED WITH AT LEAST ONE LABEL ON EACH FLOOR LEVEL. THE LABEL SHALL READ: "ACTIVE VAPOR MITIGATION SYSTEM".
10. VENTILATION FAN(S): EACH OF THE THREE (3) IN-LINE VACUUM BLOWERS SHALL BE INSTALLED NEAR THE ROOF OF THE EXISTING BUILDING AS DEPICTED IN THE "BLOWER AND ROOF PIPING DETAIL". THE FAN SHALL BE INSTALLED AS PER THE MANUFACTURER'S INSTRUCTIONS. A 240 V, 1-PHASE, ELECTRICAL DISCONNECT SWITCH SHALL BE SUPPLIED AND INSTALLED BY A LICENSED ELECTRICIAN IN ACCORDANCE WITH ALL APPLICABLE LOCAL ELECTRICAL CODES. EACH VACUUM BLOWER SHALL BE CAPABLE OF PRODUCING A MINIMUM OF 89 CFM @ 30"H2O VACUUM. EACH VACUUM BLOWER SHALL BE A OBAR COMPACT RADIAL BLOWER, MODEL NO. GBR76-JD, MANUFACTURED BY OBAR SYSTEMS INC, SOUTH NEWFOUNDLAND, NJ, OR EQUAL.
11. SYSTEM INDICATOR: A VACUUM GAUGE SHALL BE INSTALLED ON EACH LEG OF THE VAPOR VENT PIPING IN ORDER TO PROVIDE A VISUAL INDICATION OF THE SYSTEM OPERATION. THE VACUUM GAUGE SHALL BE INSTALLED AT THE LOWEST ACCESSIBLE LOCATION OF EACH MANIFOLD LEG IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. THE VACUUM GAUGES WILL BE 2-12" DIAL, LOW VACUUM DIAPHRAGM GAUGES, 1.5% FULL SCALE ACCURACY. THE VACUUM GAUGES SHALL BE DWYER SERIES LPG4 LOW PRESSURE GAUGE, 0 TO 60" H2O RANGE, MODEL NO. LPG4-D7522N, MANUFACTURED BY DWYER INSTRUMENTS, MICHIGAN CITY, IN.
12. VACUUM ALARM: THREE (3) VACUUM ALARMS SHALL BE INSTALLED IN ORDER TO PROVIDE AN AUDIBLE AND VISUAL ALARM IN THE EVENT THE VACUUM FAN SHUTS DOWN AND THERE IS A LOSS OF VACUUM WITHIN THE SYSTEM PIPING. THE ALARM UNITS SHALL CONNECT TO THE PROCESS PIPING VIA A 1/4" DIAMETER FLEXIBLE POLYETHYLENE TUBE AND POWERED THROUGH A 110V ELECTRICAL OUTLET. THE ALARM UNIT SHALL BE CAPABLE OF TRANSMITTING A REAL-TIME VACUUM READING VIA A 4-20mA SIGNAL TO AN EXTERNAL CENTRAL ALARM TELEMETRY PANEL. THE ALARM UNIT SHALL BE A MODEL GBR25-T, PRESSURE GAUGE / ALARM, MANUFACTURED BY OBAR SYSTEMS, INC.
13. REMOTE MONITORING PANEL: ONE CENTRAL MONITORING PANEL SHALL BE CONNECTED TO EACH OF THE THREE (3) VACUUM ALARM UNITS IN ORDER TO PROVIDE REMOTE NOTIFICATION OF ANY ALARM OR SYSTEM SHUTDOWN CONDITION. THE REMOTE MONITORING SYSTEM SHALL BE CAPABLE OF RELAYING ALARM CONDITIONS VIA A CELLULAR MODEM CONNECTION AND ISSUE ALERTS VIA EMAIL, SMS TEXT NOTIFICATION, AND/OR MOBILE APPLICATION PUSH NOTIFICATION. THE REMOTE MONITORING PANEL SHALL BE A SENTINEL CELLULAR MONITORING STATION, MANUFACTURED BY SENSAPHONE INC.
14. VACUUM MONITORING POINTS: VACUUM TEST POINTS SHALL BE INSTALLED AT A MINIMUM OF TEN (10) LOCATIONS IN THE CONCRETE SLAB FOR THE PURPOSE OF TESTING THE EFFECTIVENESS OF THE SSD SYSTEM. THE VAPOR MONITORING POINTS SHALL BE DRILLED-IN-PLACE STAINLESS STEEL VAPOR PIN INSERTS. EACH MONITORING POINT SHALL BE CAPPED USING A SCREW IN PLACE FLUSH MOUNT STAINLESS STEEL COVER. EACH VAPOR PIN SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS RECOMMENDED INSTALLATION INSTRUCTIONS. MONITORING POINTS SHALL BE STAINLESS STEEL VAPOR PINS (MODEL VPIN0522SS) AND FLUSH MOUNTED STAINLESS STEEL SECURE COVER MANUFACTURED BY COX COLVIN, PLAIN CITY, OH.
15. ALL COMPONENTS OF THE SUB SLAB DEPRESSURIZATION SYSTEM SHALL BE IN ACCORDANCE WITH ASTM E 2121-21 "STANDARD PRACTICE FOR RADON MITIGATION SYSTEMS IN EXISTING LOW-RISE RESIDENTIAL BUILDINGS" AND NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION, (NYSDEC), DER-10 "TECHNICAL GUIDANCE FOR SITE INVESTIGATION AND REMEDIATION".

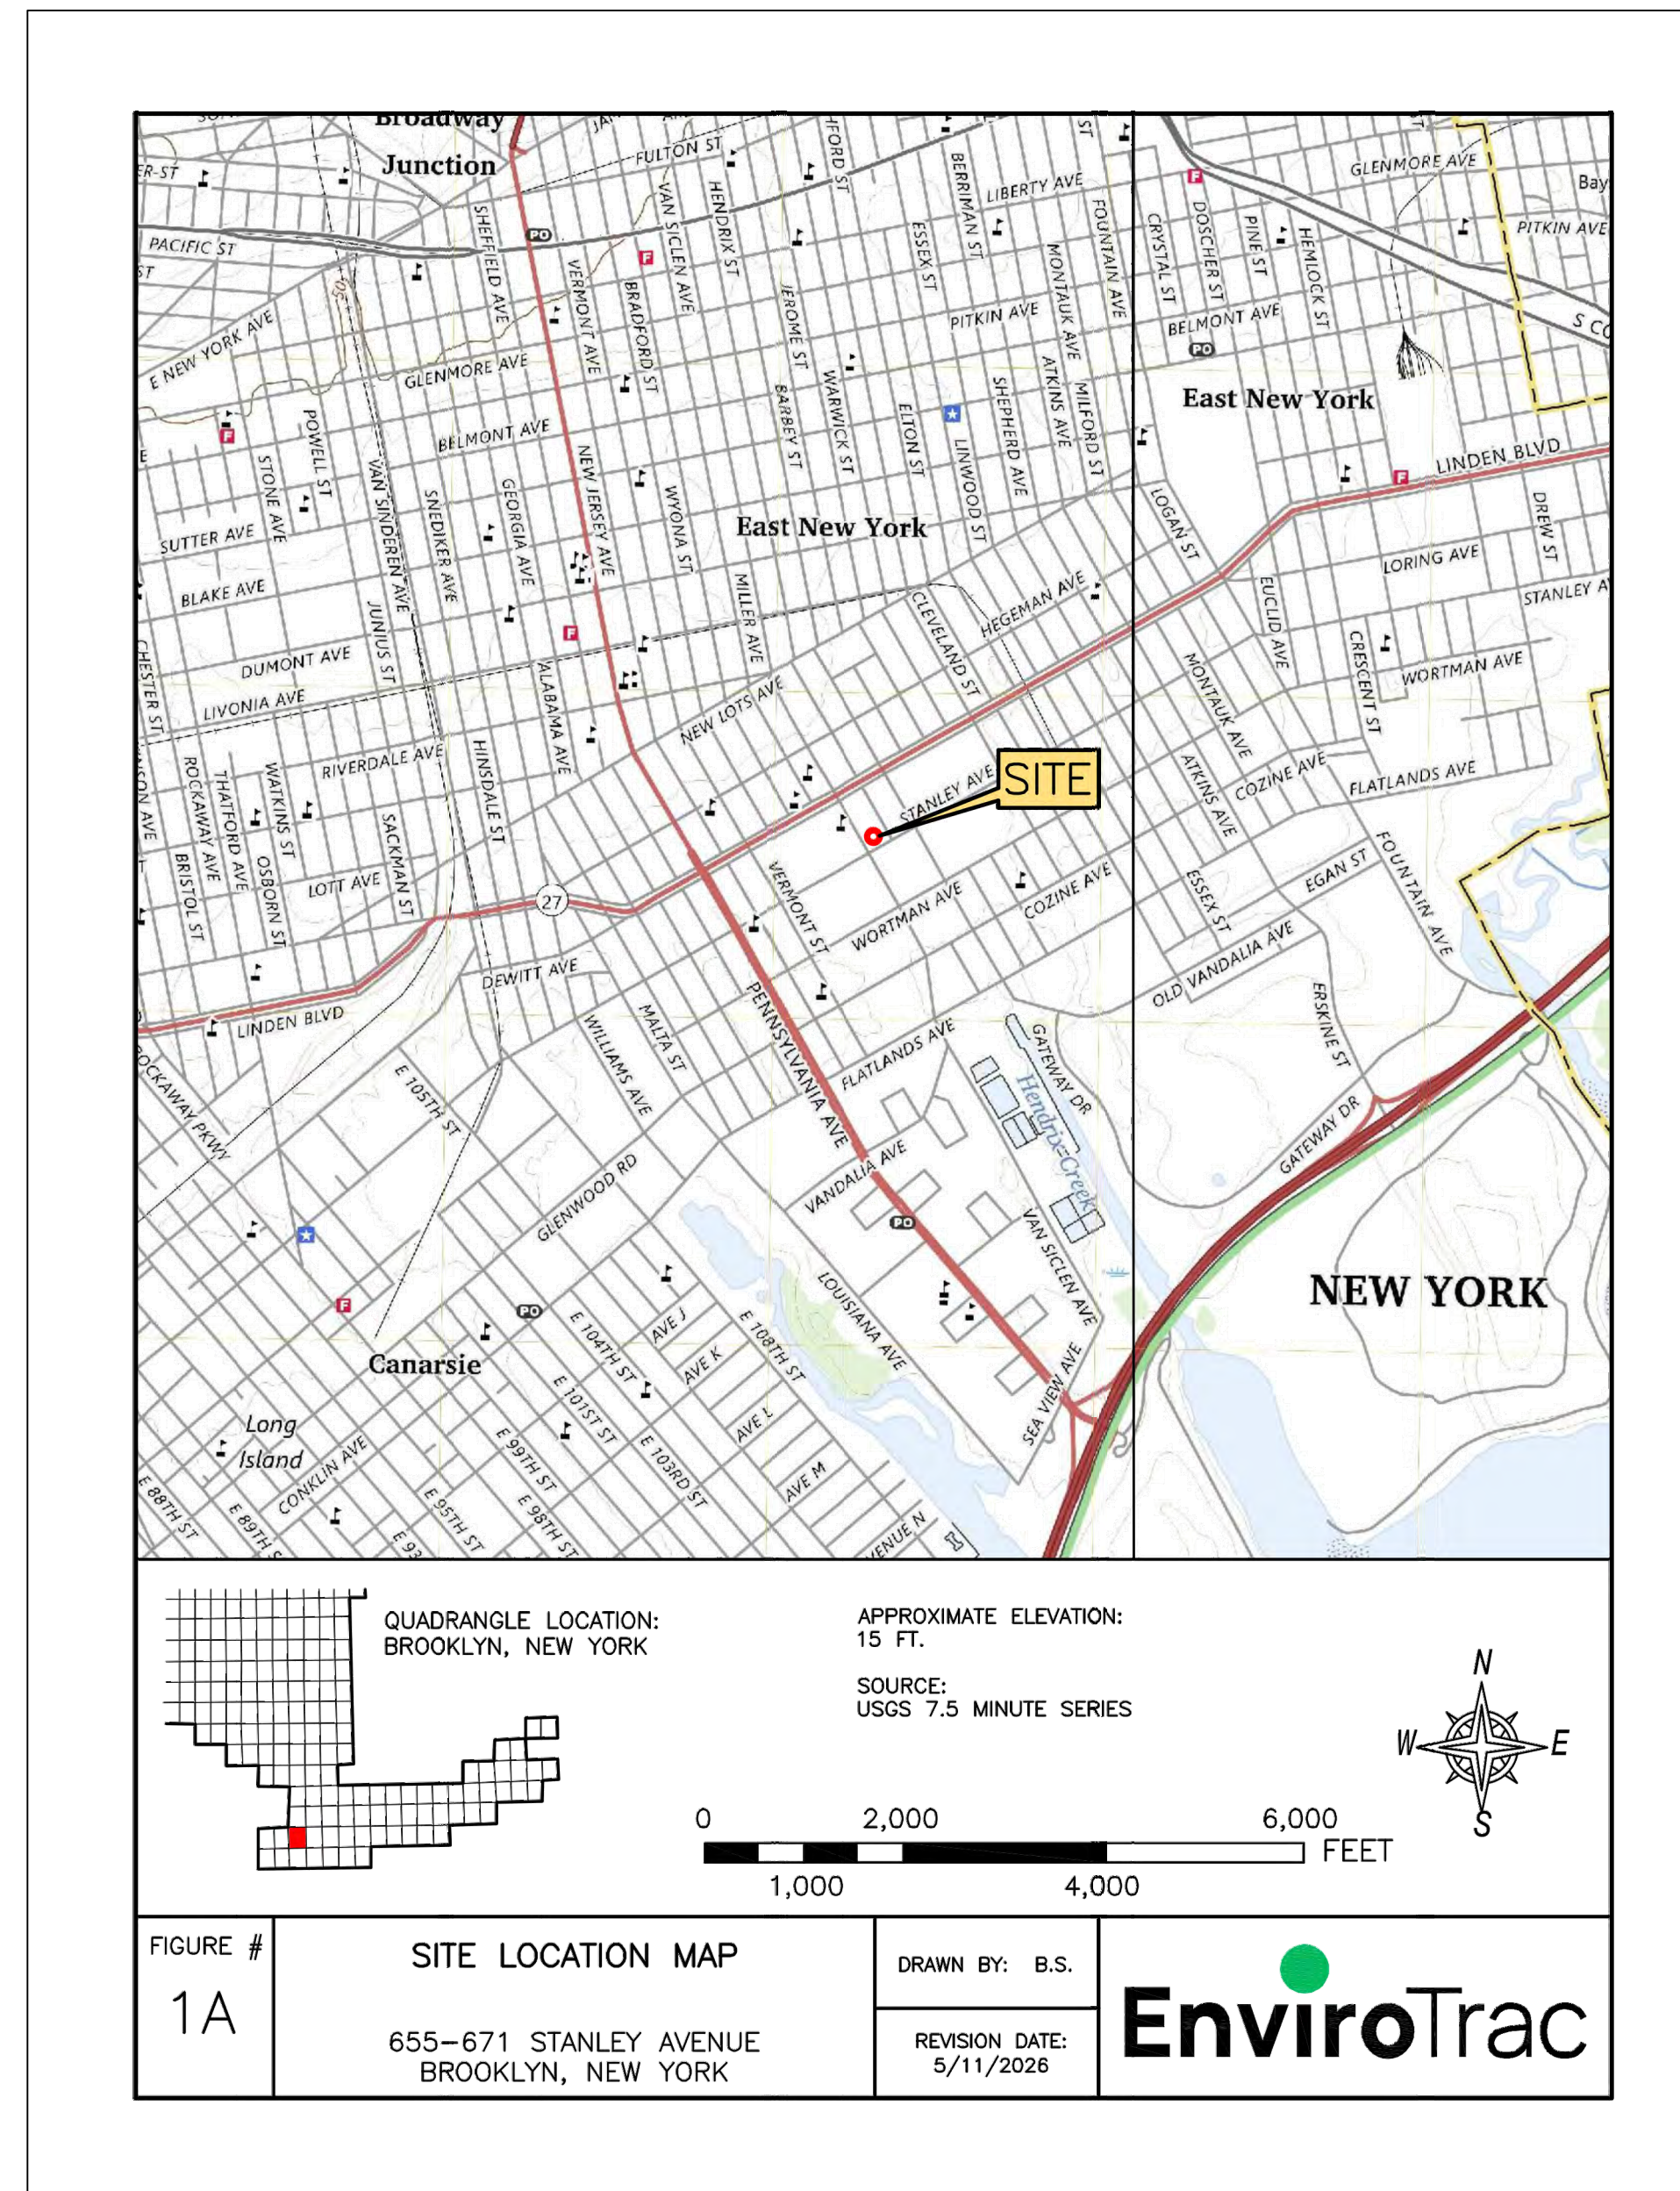

DRAWING INDEX	
DWG. No.	TITLE
SSDS-001.00	TITLE SHEET
SSDS-002.00	DRAWING INDEX, SITE LOCATION, ABBREVIATIONS AND NOTES
SSDS-003.00	SITE PLAN - SSDS LAYOUT
SSDS-004.00	MISCELLANEOUS SSDS DETAILS

ABBREVIATIONS	
SSDS	SUB-SLAB DEPRESSURIZATION SYSTEM
DWG	DRAWING
GFCI	GROUND FAULT CIRCUIT INTERRUPTER
VMP	VACUUM MONITORING POINT
SCH	SCHEDULE
TYP	TYPICAL

PROJECT ENGINEER

ENVIROTRAC ENGINEERING &
 GEOLOGY, PC
 5 OLD DOCK ROAD
 YAPHANK, NY 11980

SEAL AND SIGNATURE

May 29, 2026

Dale C. Konas, PE
 NY Lic. No. 081035

DRAWN/REVISED BY: DK

REVISION DATE: MAY 28, 2026

REVISION No.: 1.0

DRAWING TITLE

DRAWING INDEX, SITE LOCATION,
 ABBREVIATIONS AND NOTES

PREPARED FOR

UNIDOS ZR LLC
 751 3RD AVENUE
 FRANKLIN SQUARE, NEW YORK 11010

PROJECT SITE

655-671 STANLEY AVENUE
 BROOKLYN, NEW YORK 11207



FIGURE NO.

SSDS-002.00





EnviroTrac

Environmental Services

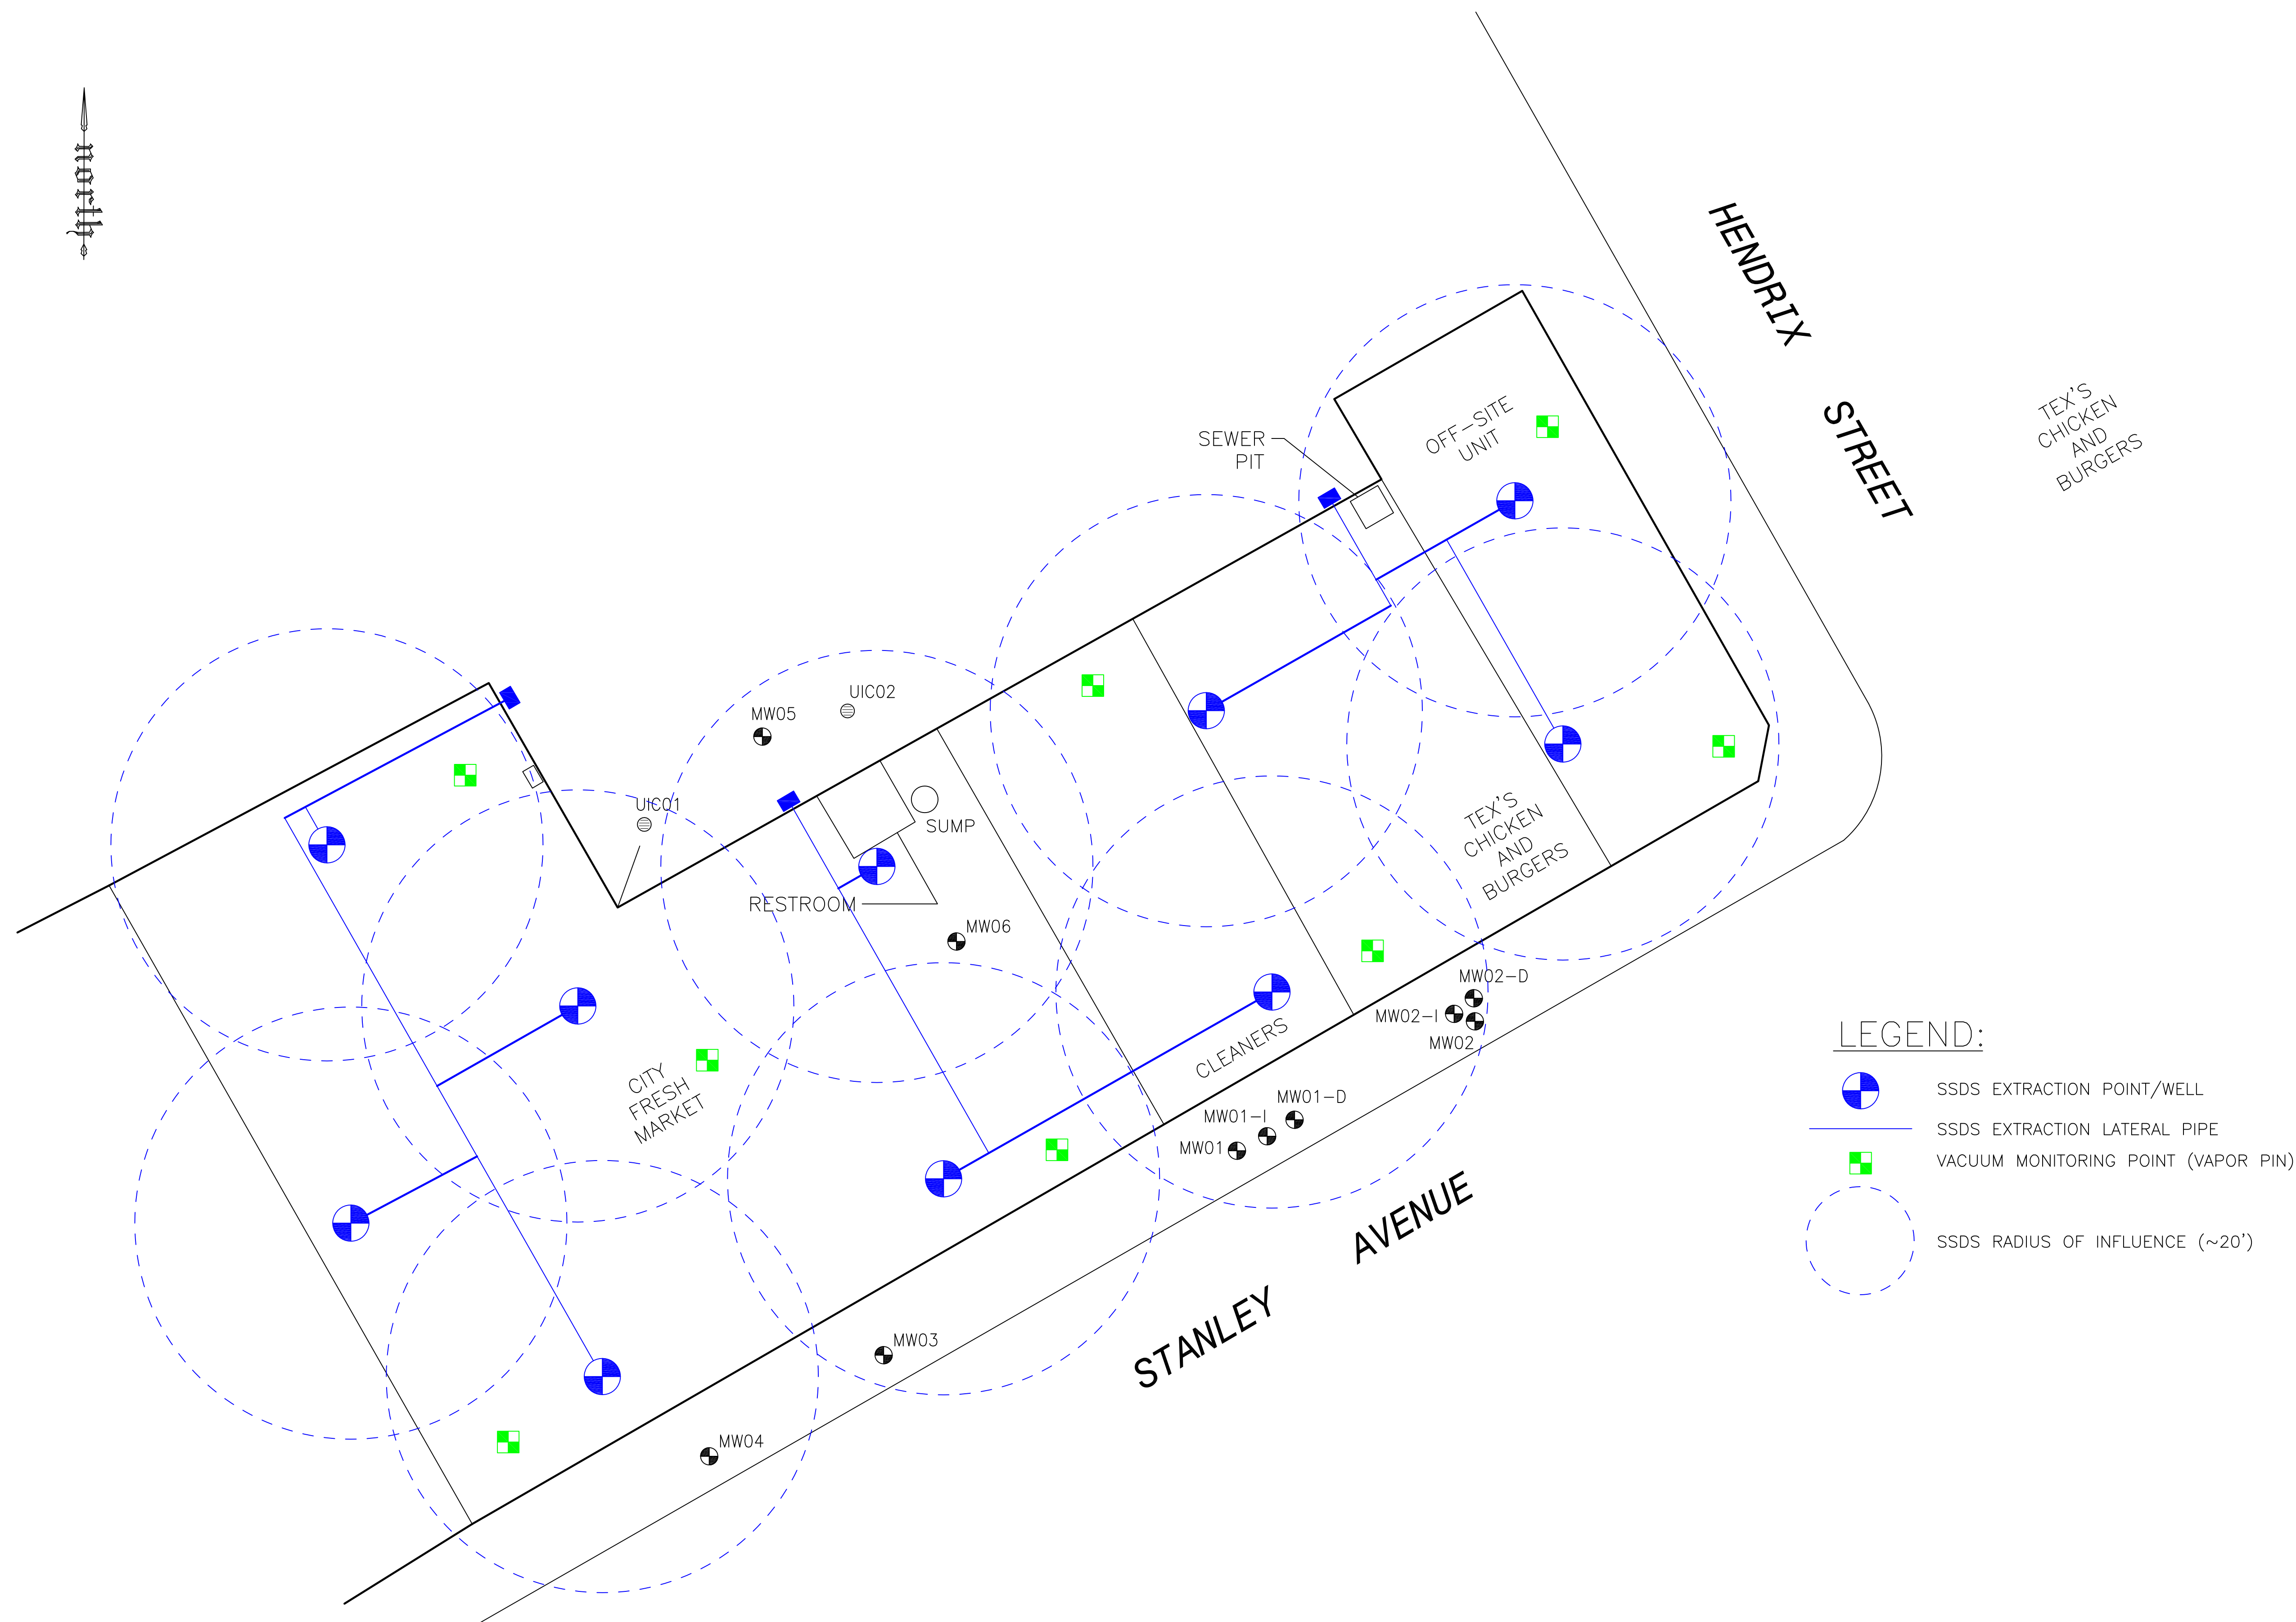5 OLD DOCK ROAD, YAPHANK, NEW YORK 11980
 PHONE: (631)924-3001 FAX: (631)924-5001



LEGEND:

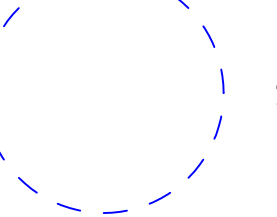-  SSDS EXTRACTION POINT/WELL
-  SSDS EXTRACTION LATERAL PIPE
-  VACUUM MONITORING POINT (VAPOR PIN)
-  SSDS RADIUS OF INFLUENCE (~20')

PROJECT ENGINEER

ENVIROTRAC ENGINEERING &
GEOLOGY, PC
5 OLD DOCK ROAD
YAPHANK, NY 11980

SEAL AND SIGNATURE May 29, 2026

Dale C. Konas, PE
NY Lic. No. 081035

DRAWN/REVISED BY: DK
REVISION DATE: MAY 26, 2026
REVISION No.: 1.0

DRAWING TITLE
SITE PLAN - SSDS LAYOUT

PREPARED FOR
**UNIDOS ZR LLC
751 3RD AVENUE
FRANKLIN SQUARE, NEW YORK 11010**

PROJECT SITE
**655-671 STANLEY AVENUE
BROOKLYN, NEW YORK 11207**


FIGURE NO.
SSDS-003.00



Environmental Services
5 OLD DOCK ROAD, YAPHANK, NEW YORK 11980
PHONE: (631)924-3001 FAX: (631)924-5001


RISER PIPE DETAIL

NOT TO SCALE

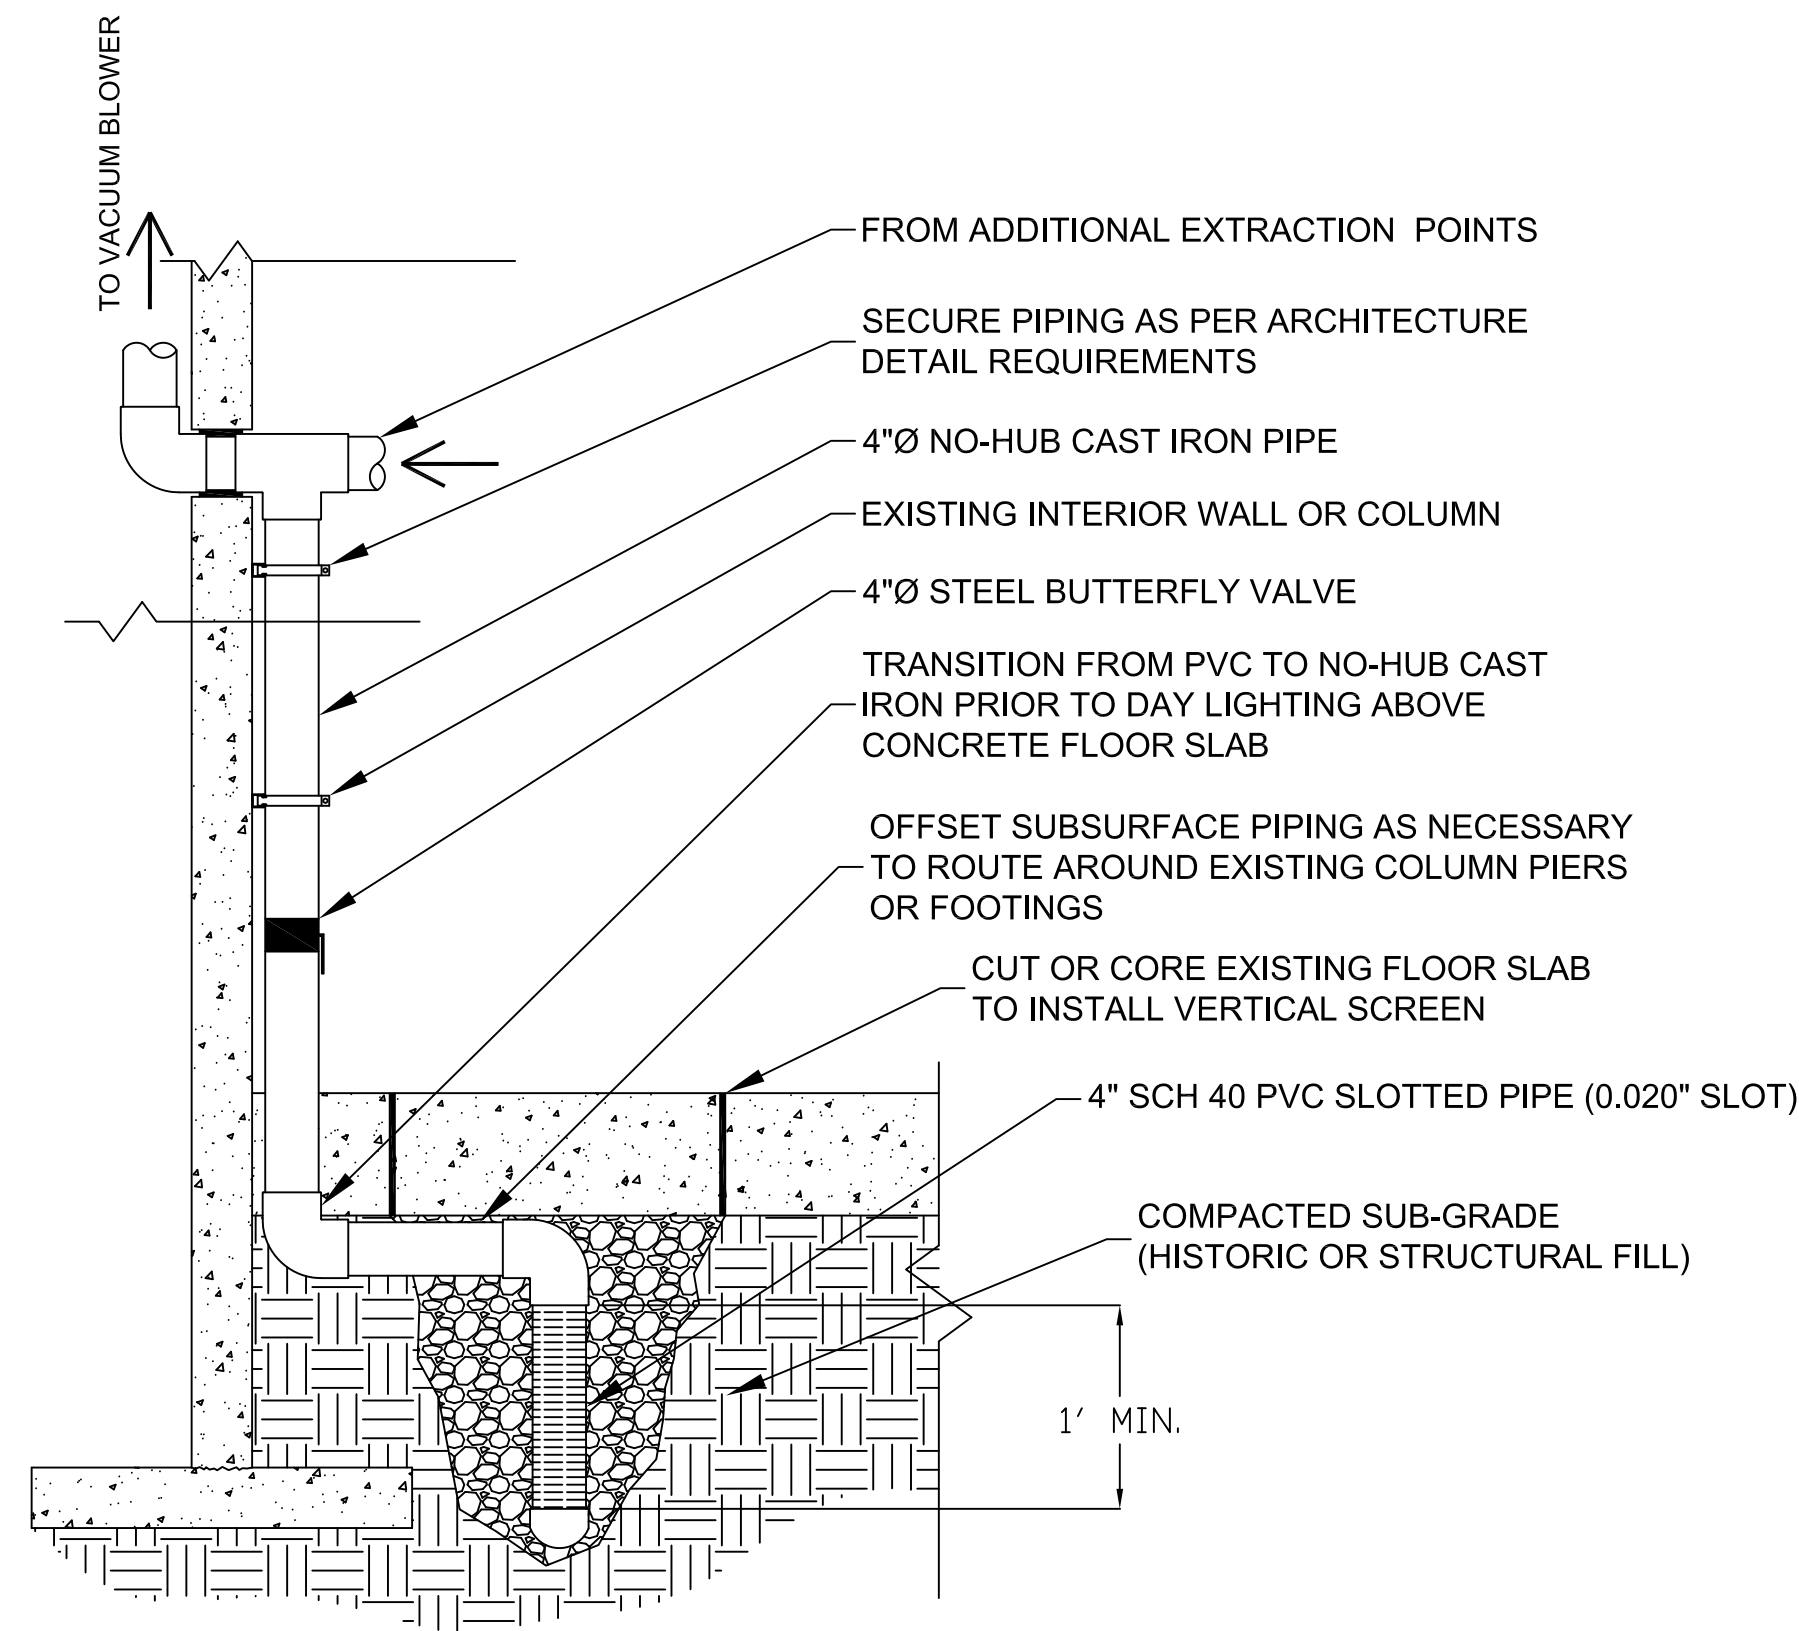


VAPOR / VACUUM MONITORING POINT

NOT TO SCALE

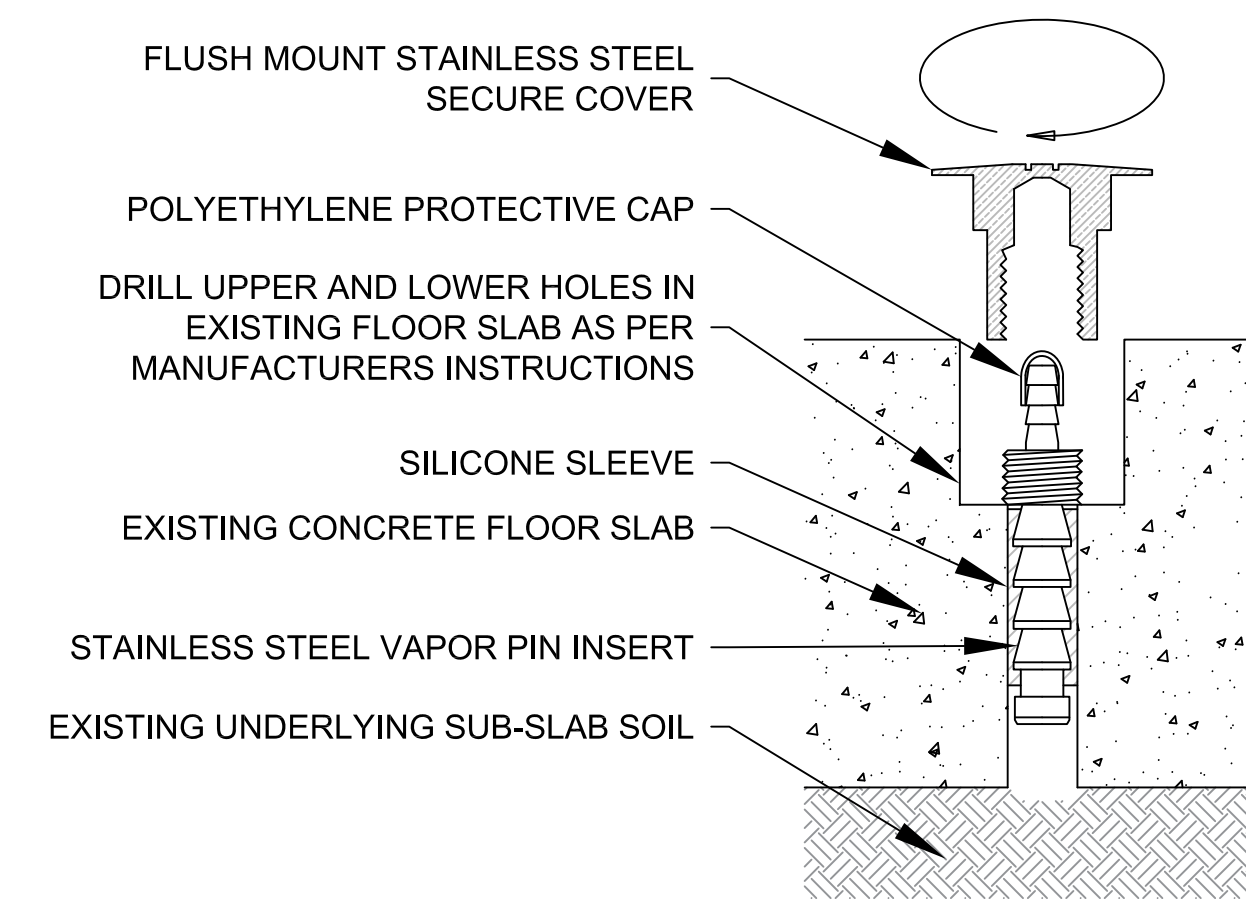


BLOWER AND ROOF PIPING DETAIL

NOT TO SCALE

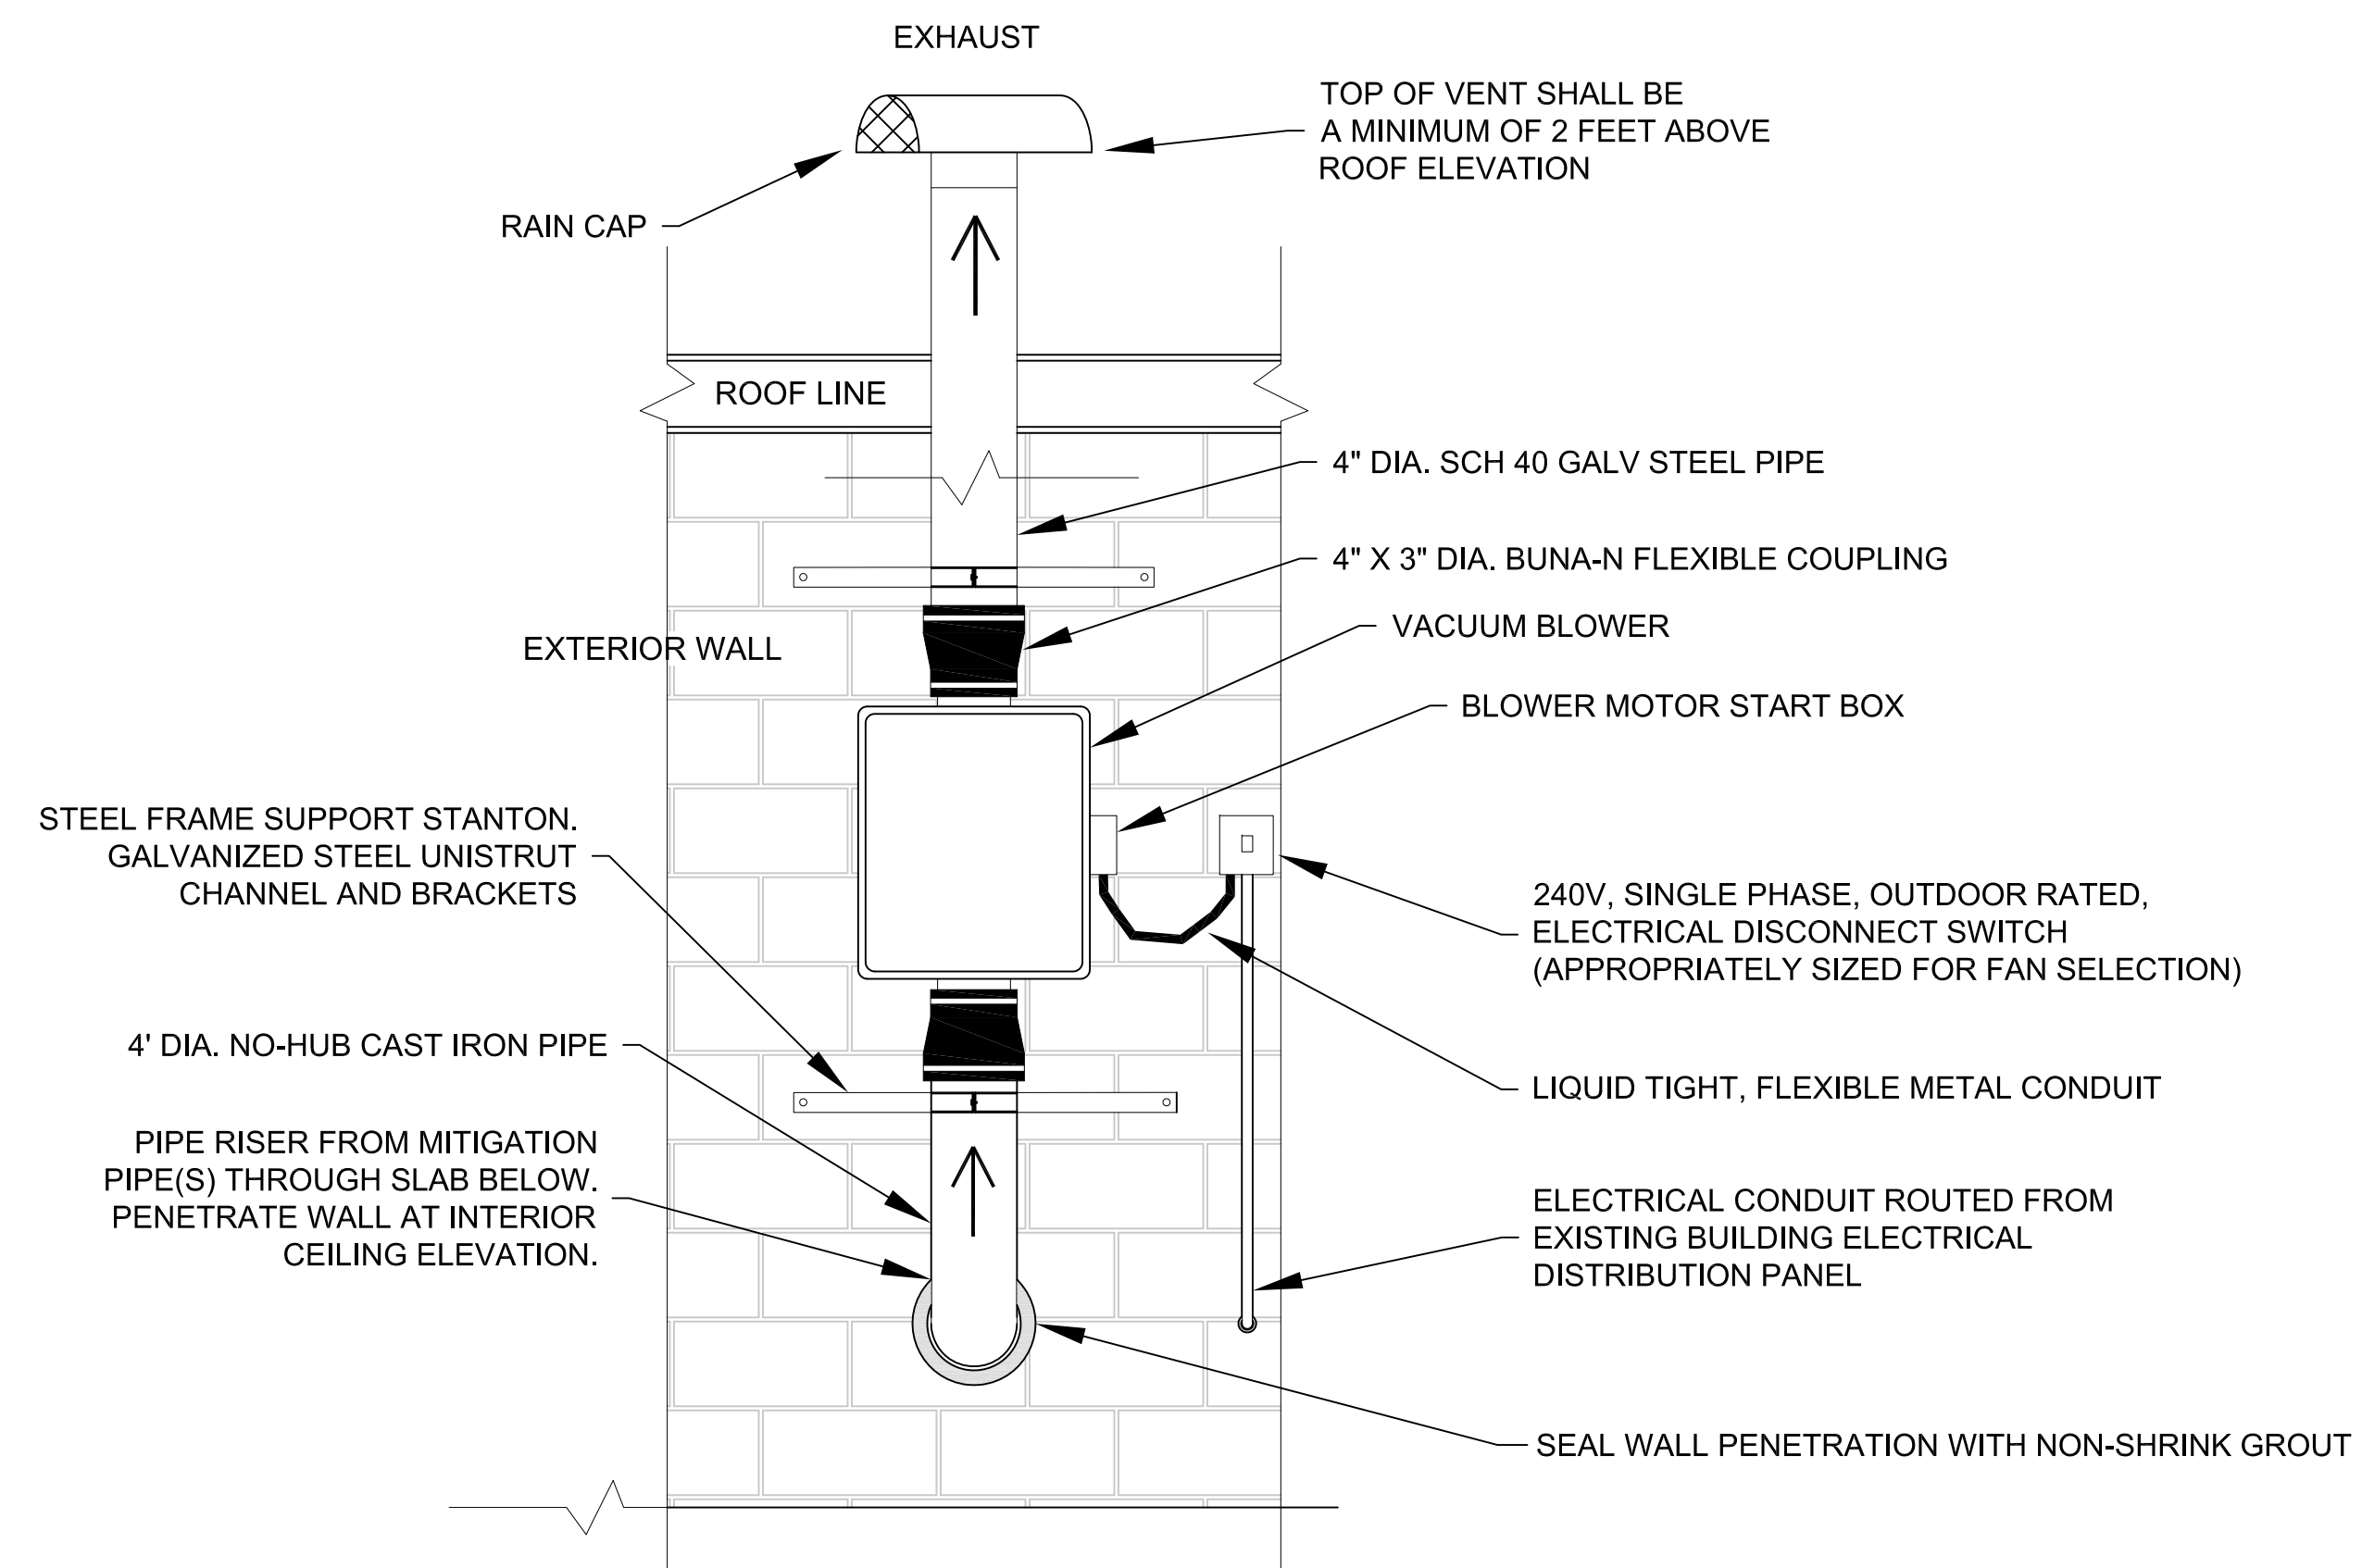

EXTRACTION POINT DETAIL

(SSDS-1 - SSDS-15) NOT TO SCALE

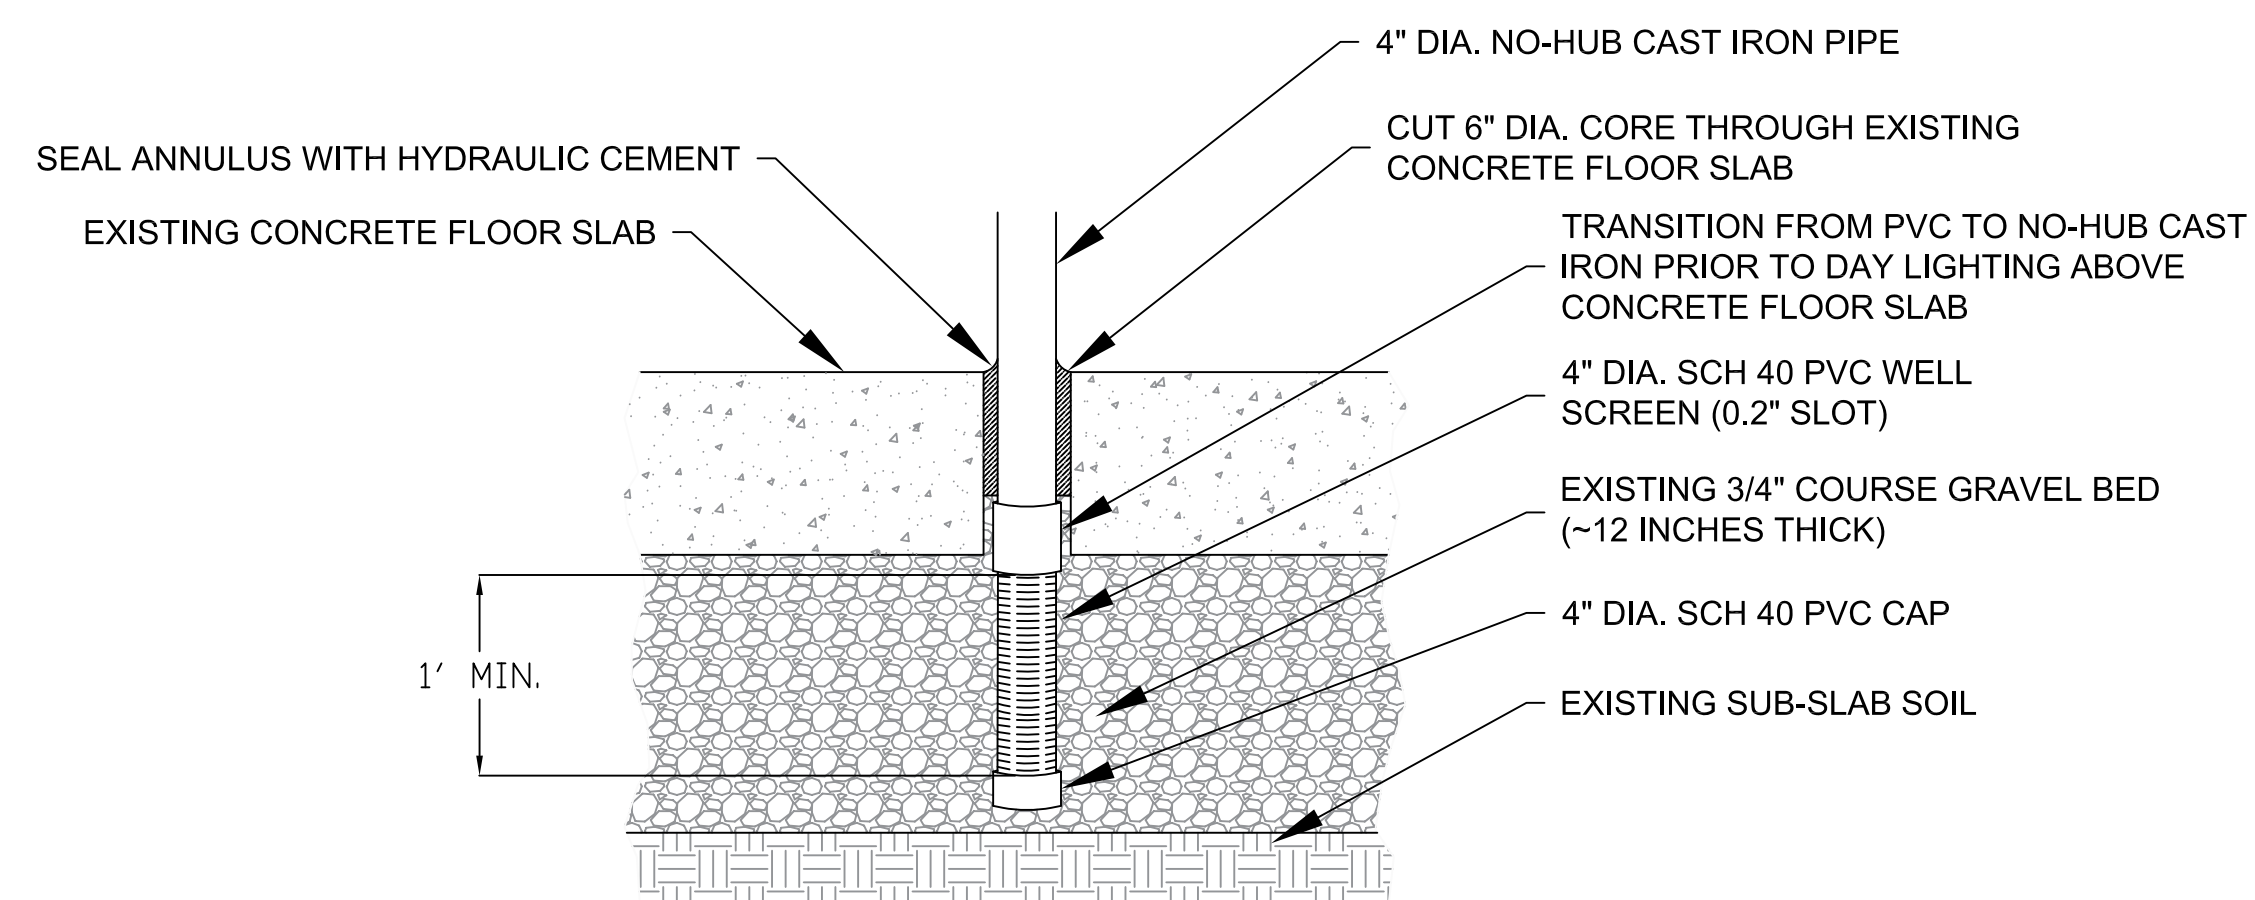

NOTES:
A. BUILDING DETAILS SHOWN FOR CONCEPTUAL PURPOSES ONLY. NOT TO BE USED FOR STRUCTURAL OR ARCHITECTURAL PURPOSES.

SSDS EQUIPMENT SCHEDULE			
DESIGNATION	DESCRIPTION	SIZE / RANGE	MANUFACTURER / MODEL
SF-1, SF-2, SF-3	SUCTION FANS	38.0"H2O MAX / 195 CFM MAX	OBAR SYSTEMS GBR76-UD 240V
V-1 - VS-10	VACUUM GAUGES	0-60"H2O VACUUM	DWYER LPG4-D7522N
VS-1, VS-2 & VS-3	VACUUM SENSOR / ALARM / TRANSMITTER	0-20"H2O VACUUM	OBAR SYSTEMS GBR25-T
RMP-1	REMOTE MONITORING PANEL	CELLULAR MONITORING SYSTEM	SENSAPHONE SENTINEL CELLAR MONITOR

PROJECT ENGINEER

ENVIROTRAC ENGINEERING & GEOLOGY, PC
5 OLD DOCK ROAD
YAPHANK, NY 11980

SEAL AND SIGNATURE

May 29, 2026

Dale C. Konas, PE
NY Lic. No. 081035

DRAWN/REVISED BY: DK

REVISION DATE: MAY 26, 2026

REVISION No.: 1.0

DRAWING TITLE

MISCELLANEOUS SSDS DETAILS

PREPARED FOR

UNIDOS ZR LLC
751 3RD AVENUE
FRANKLIN SQUARE, NEW YORK 11010

PROJECT SITE

655-671 STANLEY AVENUE
BROOKLYN, NEW YORK 11207

FIGURE NO.

SSDS-004.00

EnviroTrac

Environmental Services

5 OLD DOCK ROAD, YAPHANK, NEW YORK 11980
PHONE: (631)924-3001 FAX: (631)924-5001

ATTACHMENT A

THE OBAR GBR76

COMPACT RADIAL BLOWER



GBR76 WITH ROOF MOUNT

Based on 25 years of experience and 2 years of research and development, the patent pending GBR series of compact radial blowers provide the perfect combination of performance and design.

PERFORMANCE

- GBR76 SOE 16" WC @ 0 Max flow 155 CFM.
- GBR76 UD 40" WC @ 0 Max flow 195 CFM.
- Built in speed control to customize performance.
- Condensate bypass built in.
- 12 month warranty - 40,000 hr sealed bearings.

DESIGN

- Our modular design means the blower and manifold assembly can be removed and replaced as a unit. This makes repairs cost effective and easy and allows contractors to upgrade systems simply by swapping assemblies.
- The GBR series is based on a bypass blower designed to handle combustible materials.
- The housing is not required to be air tight, so you can add gauges and alarms without compromising the system.
- Built in condensate bypass.
- Built in speed control.
- Quick disconnect electrical harness.
- All UL listed components including UL listed enclosure for outside use.
- Wall fastening lugs included.
- GBR series roof and wall mounts available to quickly configure the blowers for your installation while providing a custom built look.
- Compact design 16"x 14"x 8" weighing only 18 lbs.
- 3" schedule 40 inlet and exhaust.
- Universal Drive model accepts voltage from 120-240V without alteration

GBR76 SOE	0"	2"	4"	6"	8"	10"	12"	16"	Wattage
SOE 16	150	140	129	118	105	90	75	35	150-320
SOE 12	125	115	100	83	62	39	0		110-200
SOE 8	105	90	70	42	0				60-120
SOE 4	75	50	0						37-50

GBR SOE performance using built in potentiometer set at sealed vacuums of 16, 12, 8, and 4" WC

GBR76 UD	0"	10"	20"	30"	37"	Wattage
110V	195	158	118	63	20	700-870
220V	197	162	130	89	50	800-1100

Blower Specifications

GBR76 SOE

- **Input Voltage Range:** 108-132 Volts AC RMS, 50/60 Hz, single phase.
 - **Input Current:** 6 amps AC RMS
 - **Operating Temperature (Ambient Air and Working Air):** 0°C to 50°C
 - **Storage Temperature:** -40°C to 85°C
 - **Dielectric Testing:** 1500 Volts AC RMS 60 Hz applied for one second between input pins and ground, 3mA leakage maximum.
 - **Speed Control Methods:** PWM (Pulse Width Modulation) (1 kHz to 10 kHz)
0 to 10 VDC speed control.
- Mechanical: A potentiometer is available for speed control of the blower. The potentiometer can be preset for a specific speed. Access for speed adjustment located in motor housing.
- **Approximate Weight:** 4.8 Lbs. / 2.2 Kg
 - **Regulatory Agency Certification:** Underwriters Laboratories Inc. UL507 Recognized under File E94403 and compliant under the CE Low Voltage Directive 2006/95/EC.
 - **Design Features:** Designed to provide variable airflow for low NOx & CO emission in high efficiency gas fired combustion systems. Built with non-sparking materials. Blower housing assembly constructed of die cast aluminum. Impeller constructed from hardened aluminum. Rubber isolation mounts built into blower construction to dampen vibration within the motor. Two piece blower housing assembly sealed with O-ring gasket for combustion applications. Customer is responsible to check for any leakage once the blower is installed into the final application.
 - **Miscellaneous:** Blower inlet, discharge, and all motor cooling inlet and discharge vents must not be obstructed. Motor ventilation air to be free of oils and other foreign particles, (i.e. breathing quality air). Blower is to be mounted so ventilation air cannot be re-circulated.
- POWER CONNECTION:** Blower connector, AMP Universal MATE-N-LOK, part no. 1-350943-0.
SPEED CONNECTION: Blower connector, Molex Mini-Fit Jr., part no. 39-30-3056.
Mating harnesses available upon request.

GBR76 UD

- **Input Voltage Range:** 100-240 Volts AC RMS, 50/60 Hz, single phase.
 - **input Current:** 10 amps AC RMS
 - **Operating Temperature (Ambient Air and Working Air):** 0°C to 50°C
 - **Storage Temperature:** -40°C to 85°C
 - **Dielectric Testing:** 1800 Volts AC RMS 60 Hz applied for one second between input pins and ground, 3mA leakage maximum.
 - **Speed Control Methods:** Mechanical- A potentiometer is provided for speed control of the blower. The potentiometer can be preset for specific speed. Access for speed adjustment located inside motor housing.
 - **Approximate Weight:** 4.8 Lbs. / 2.2 Kg
 - **Regulatory Agency Certification:** Underwriters Laboratories Inc. UL507 Recognized under File E94403 and compliant under the CE Low Voltage Directive 2006/95/EC.
 - **Design Features:** Designed to provide variable airflow for low NOx & CO emission in high efficiency gas fired combustion systems. Built with non-sparking materials. Blower housing assembly constructed of die cast aluminum. Impeller constructed from hardened aluminum. Rubber isolation mounts built into blower construction to dampen vibration within the motor. Two piece blower housing assembly sealed with O-ring gasket for combustion applications. Customer is responsible to check for any leakage once the blower is installed into the final application. **Additional Design Features:** (1) PCB coated with silicone. (2) Both bearings utilizing light contact seals. (3) Stainless steel components in working air compartment; ie shaft, washer and nut for securing the impeller, and stainless bearing thrust washer.
 - **Miscellaneous:** Blower inlet, discharge, and all motor cooling inlet and discharge vents must not be obstructed. Motor ventilation air to be free of oils and other foreign particles (i.e. breathing quality air). Blower is to be mounted so ventilation air cannot be re-circulated.
- POWER CONNECTION:** Blower connector, AMP Universal MATE-N-LOK, part no. 350767-1 mates with customer supplied AMP connector, (PN#350766-1) with female terminals. PN#350536-3 or equivalent on 16GA, 600V rated wire
GROUND LEAD: Amp pin terminal (350547-1) on green/yellow 18 GA. 105°C, 600V rated wire.

Enclosure Specifications

Ratings:

Ingress Protection (EN 60529): 66/67

Electrical insulation: Totally insulated

Halogen free (DIN/VDE 0472, Part 815): yes


UV resistance: UL 508

Flammability Rating (UL 746 C 5): complies with UL 508


Glow Wire Test (IEC 695-2-1) °C: 960

NEMA Class: UL Type 4, 4X, 6, 6P, 12 and 13

Certificates: Underwriters Laboratories

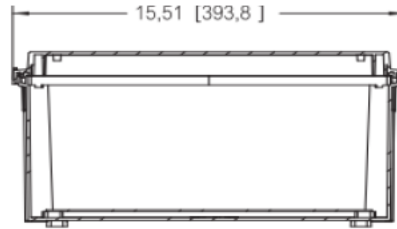

Screw cover

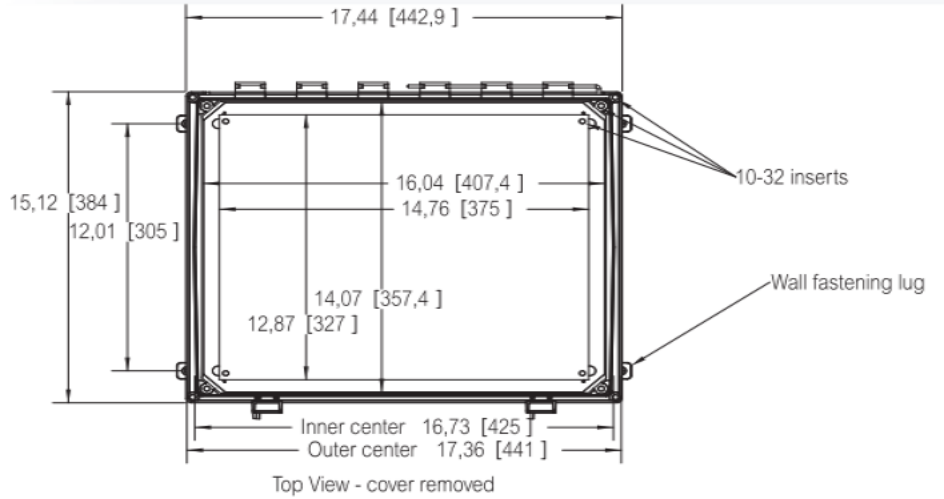


OBAR SYSTEMS INC 2969 ROUTE 23 SOUTH NEWFOUNDLAND NJ 07435 800 949 6227

GBR76-UD 240 volt at Maximum Static Pres

— GBR76-UD240

- - - GBR-UD240 Watts

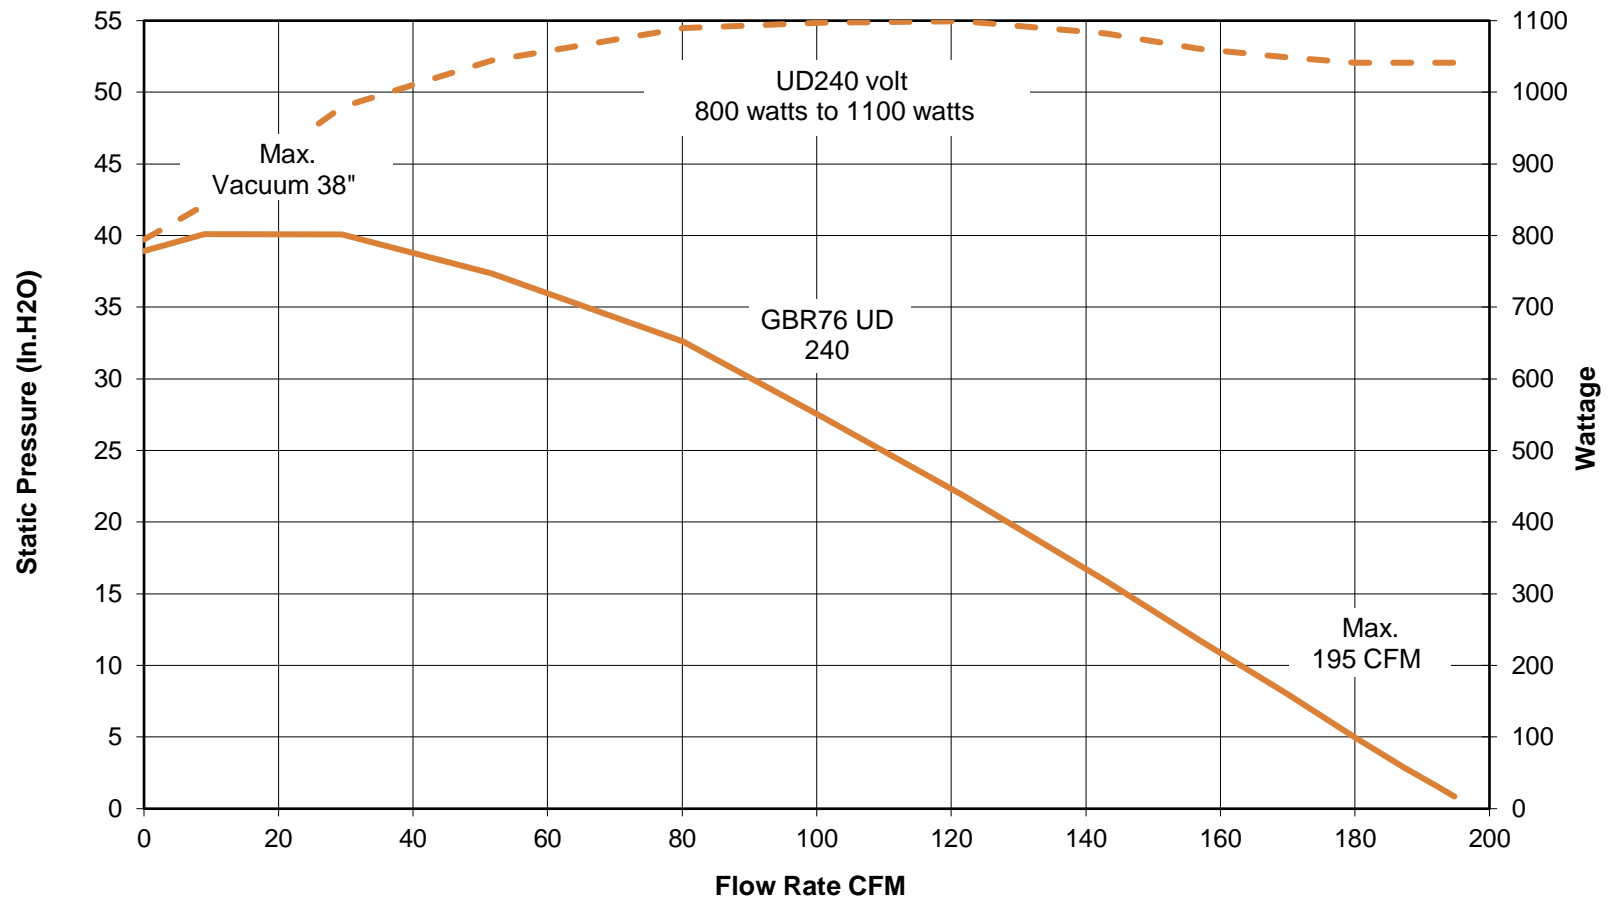

ATTACHMENT B

Vapor Pin®

Standard Operating Procedure

Installation and Extraction

Vapor Pin® Sampling Device

Scope & Purpose

Scope

This standard operating procedure describes the installation and extraction of the Vapor Pin® Sampling Device for use in sub-slab soil-gas sampling.

Purpose

The purpose of this procedure is to assure good quality control in field operations and uniformity between field personnel in the use of the Vapor Pin® Sampling Device.

Equipment Needed

- Vapor Pin® Sampling Device
- Vapor Pin® Sleeves
- Vapor Pin® Cap
- Installation/Extraction Tool
- Rotary Hammer Drill
 - 5/8-Inch (16mm) diameter hammer bit
 - 1½-Inch (38mm) diameter hammer bit for flush mount applications
- ¾-Inch (19mm) diameter bottle brush
- Wet/Dry Vacuum with HEPA filter (optional)
- Dead Blow Hammer
- VOC-free hole patching material (hydraulic cement) and a putty knife or trowel
 - This is for repairing the hole following the extraction of the Vapor Pin® Sampling Device

Installation Procedure

1. Check for buried obstacles (pipes, electrical lines, etc.) prior to proceeding.
2. Set up wet/dry vacuum to collect drill cuttings.
3. For a temporary installation, drill a 5/8-inch (16mm) diameter hole through the slab and approximately 1-inch (25mm) into the underlying soil to form a void. The hole must be 5/8-inch (16mm) in diameter to ensure a seal.
 - If a flush mount installation is required, drill a 1½-inch (38mm) diameter hole at least 1¾-inches (45mm) into the slab. We highly recommend using the Stainless Steel Drilling Guide and to reference the Standard Operating Procedure Drilling Guide & Secure Cover.
4. Remove the drill bit, brush the hole with the bottle brush and remove the loose cuttings with the vacuum.
5. Assemble the Vapor Pin® Sampling Device and Vapor Pin® Sleeve (Figure 1).
6. Place the lower end of the Vapor Pin® Sampling Device assembly into the drilled hole. Place the small hole located in the handle of the Installation/Extraction Tool, over the Vapor Pin® to protect the barb fitting and tap the Vapor Pin® into place using a dead blow hammer (Figure 2). Make sure the Installation/Extraction Tool is aligned parallel to the Vapor Pin® to avoid damaging the barb.
 - During installation, the Vapor Pin® Sleeve may form a slight bulge between the slab and the Vapor Pin® Sampling Device shoulder.
7. Place the Vapor Pin® Cap on the Vapor Pin® to prevent vapor loss prior to sampling (Figure 3).
8. For flush mount installations, cover the Vapor Pin® with a flush mount cover, using either the plastic cover or the optional Stainless Steel Secure Cover (Figure 4).
9. Allow 20 minutes or more (consult applicable guidance for your situation) for the sub-slab soil-gas conditions to re-equilibrate prior to sampling.

Standard Operating Procedure

Installation and Extraction

Figure 1.



Figure 2.



Figure 3.



Figure 4.



Sampling

1. Remove the Vapor Pin® Cap and connect your sample tubing to the barb fitting of the Vapor Pin® Sampling Device.
2. Create a connection by using a short piece of Tygon™ tubing to join the Vapor Pin® Sampling Device with the Nylaflow tubing (Figure 5). Put the Nylaflow tubing as close to the Vapor Pin® Sampling Device as possible to minimize contact between soil gas and Tygon™ tubing. You do not **have** to use Nylaflow tubing, any stiff tubing will suffice.
3. Prior to sampling, conduct a leak test in accordance with applicable guidance. If a leak test is not specified, refer to the SOP Leak Testing the Vapor Pin® Sampling Device, via Mechanical Means (Figure 6). For flush-mount installations, distilled water can be poured directly into the 1½ inch (38mm) hole.

Figure 5.



Figure 6.



Figure 7.



Extraction Procedure & Reuse Notes

1. Remove the protective cap, and thread the Installation/Extraction Tool onto the Vapor Pin® Sampling Device (Figure 7). Turn the tool clockwise continuously, don't stop turning, the Vapor Pin® Sampling Device will feed into the bottom of the Installation/Extraction Tool and will extract from the hole like a wine cork, **DO NOT PULL!**
2. Fill the void with hydraulic cement and smooth with a trowel or putty knife.
3. Prior to reuse, remove the silicon Vapor Pin® Sleeve and Vapor Pin® Cap and discard. Decontaminate the Vapor Pin® Sampling Device in a Alconox® solution, then heat in an oven to a temperature of 265° F (130°C). For Stainless – ½ hour, Brass 8 minutes.

Vapor Pin®

Standard Operating Procedure

Drilling Guide & Secure Cover

Scope & Purpose

Scope

This standard operating procedure (SOP) describes the methodology to use the Vapor Pin® Sampling Device Drilling Guide and Secure Cover to install and secure a Vapor Pin® Sampling Device in a flush mount configuration.

Purpose

The purpose of this SOP is to detail the methodology for installing a Vapor Pin® Sampling Device and Secure Cover in a flush mount configuration. The flush mount configuration reduces the risk of damage to the Vapor Pin® Sampling Device by foot and vehicular traffic, keeps dust and debris from falling into the flush mount hole, and reduces the opportunity for tampering.

Equipment Needed

- Vapor Pin® Sampling Device Secure Cover (Figure 1)
- Vapor Pin® Sampling Device Drilling Guide (Figure 2)
- Rotary Hammer Drill
 - 5/8-Inch (16mm) diameter hammer bit
 - 1½-Inch (38mm) diameter hammer bit for flush mount applications
- Assembled Vapor Pin® Sampling Device
- #14 Spanner Wrench
- Wet/Dry vacuum with HEPA filter (optional)
- Personal Protective Equipment (PPE)



Figure 1



Figure 2

Installation Procedure

1. Check for buried obstacles (pipes, electrical lines, etc.) prior to proceeding.
2. Set up wet/dry vacuum to collect drill cuttings.
3. While wearing PPE, drill a 1½-inch (38mm) diameter hole into the concrete slab to a depth of approximately 1¾-inches (45mm). Pre-marking the desired depth on the drill bit with tape will assist in this process.
4. Remove cuttings from the hole and place the Drilling Guide in the hole with the conical end down (Figure 3). The hole is sufficiently deep if the flange of the Drilling Guide lies flush with the surface of the slab. Deepen the hole as necessary but avoid drilling more than 2 inches (50.8mm) into the slab, as the threads on the Secure Cover may not engage properly with the threads on the Vapor Pin® Sampling Device.
5. When the 1½-inch (38mm) hole is drilled to the proper depth, replace the drill bit with a 5/8-inch (16mm) bit, insert the bit through the Drilling Guide (Figure 4), and drill through the slab. The Drilling Guide will help to center the hole for the Vapor Pin® Sampling Device and keep the hole perpendicular to the slab.
6. Remove the bit and drilling guide, clean the hole, and install the Vapor Pin® Sampling Device in accordance with the SOP "Installation and Extraction of the Vapor Pin® Sampling Device."
7. Screw the Secure Cover onto the Vapor Pin® Sampling Device and tighten using a #14 Spanner Wrench by rotating it clockwise (Figure 5). Rotate the cover counterclockwise to remove it for subsequent access.

Standard Operating Procedure

Drilling Guide & Secure Cover

8. For flush mount installations, cover the Vapor Pin® with a flush mount cover, using either the plastic cover or the optional Stainless Steel Secure Cover (Figure 4).
9. Allow 20 minutes or more (consult applicable guidance for your situation) for the sub-slab soil-gas conditions to re-equilibrate prior to sampling.



Figure 3



Figure 4



Figure 5

Limitations

On slabs less than 3 inches thick, it may be difficult to obtain a good seal in a flush mount configuration with Vapor Pin® Sampling Device. But a perfect alternative for that would be our Mini Vapor Pin®!



Standard Operating Procedure Use of the VAPOR PIN® Drilling Guide and Secure Cover

Updated March 16, 2018

Scope:

This standard operating procedure (SOP) describes the methodology to use the VAPOR PIN® Drilling Guide and Secure Cover to install and secure a VAPOR PIN® in a flush mount configuration.

Purpose:

The purpose of this SOP is to detail the methodology for installing a VAPOR PIN® and Secure Cover in a flush mount configuration. The flush mount configuration reduces the risk of damage to the VAPOR PIN® by foot and vehicular traffic, keeps dust and debris from falling into the flush mount hole, and reduces the opportunity for tampering. This SOP is an optional process performed in conjunction with the SOP entitled "Installation and Extraction of the VAPOR PIN®". However, portions of this SOP should be performed prior to installing the VAPOR PIN®.

Equipment Needed:

- VAPOR PIN® Secure Cover (Figure 1);
- VAPOR PIN® Drilling Guide (Figure 2);
- Hammer drill;
- 1½-inch diameter hammer bit (Hilti™ TE-YX 1½" x 23" #00293032 or equivalent);
- 5/8-inch diameter hammer bit (Hilti™ TE-YX 5/8" x 22" #00226514 or equivalent);
- assembled VAPOR PIN®;
- #14 spanner wrench;
- Wet/Dry vacuum with HEPA filter (optional); and

- personal protective equipment (PPE).



Figure 1. VAPOR PIN® Secure Cover



Figure 2. VAPOR PIN® Drilling Guide

Installation Procedure:

- 1) Check for buried obstacles (pipes, electrical lines, etc.) prior to proceeding.
- 2) Set up wet/dry vacuum to collect drill cuttings.
- 3) While wearing PPE, drill a 1½-inch diameter hole into the concrete slab to a depth of approximately 1 ¾ inches. Pre-marking the desired depth on the drill

VAPOR PIN® protected under US Patent # 8,220,347 B2, US 9,291,531 B2 and other patents pending

bit with tape will assist in this process.

- 4) Remove cuttings from the hole and place the Drilling Guide in the hole with the conical end down (Figure 3). The hole is sufficiently deep if the flange of the Drilling Guide lies flush with the surface of the slab. Deepen the hole as necessary, but avoid drilling more than 2 inches into the slab, as the threads on the Secure Cover may not engage properly with the threads on the VAPOR PIN®.



Figure 3. Testing Depth with the Drilling Guide

- 5) When the 1½-inch diameter hole is drilled to the proper depth, replace the drill bit with a 5/8-inch diameter bit, insert the bit through the Drilling Guide (Figure 4), and drill through the slab. The Drilling Guide will help to center the hole for the VAPOR PIN®, and keep the hole perpendicular to the slab.
- 6) Remove the bit and drilling guide, clean the hole, and install the VAPOR PIN® in accordance with the SOP “Installation and Extraction of the VAPOR PIN®.”



Figure 4. Using the Drilling Guide

- 7) Screw the Secure Cover onto the VAPOR PIN® and tighten using a #14 spanner wrench by rotating it clockwise (Figure 5). Rotate the cover counter clockwise to remove it for subsequent access.



Figure 5. Tightening the Secured Cover

Limitations:

On slabs less than 3 inches thick, it may be difficult to obtain a good seal in a flush mount configuration with the VAPOR PIN.®



Standard Operating Procedure Installation and Extraction of the Vapor Pin®

Updated March 16, 2018

Scope:

This standard operating procedure describes the installation and extraction of the VAPOR PIN® for use in sub-slab soil-gas sampling.

Purpose:

The purpose of this procedure is to assure good quality control in field operations and uniformity between field personnel in the use of the VAPOR PIN® for the collection of sub-slab soil-gas samples or pressure readings.

Equipment Needed:

- Assembled VAPOR PIN® [VAPOR PIN® and silicone sleeve(Figure 1)]; Because of sharp edges, gloves are recommended for sleeve installation;
- Hammer drill;
- 5/8-inch (16mm) diameter hammer bit (hole must be 5/8-inch (16mm) diameter to ensure seal. It is recommended that you use the drill guide). (Hilti™ TE-YX 5/8" x 22" (400 mm) #00206514 or equivalent);
- 1½-inch (38mm) diameter hammer bit (Hilti™ TE-YX 1½" x 23" #00293032 or equivalent) for flush mount applications;
- ¾-inch (19mm) diameter bottle brush;
- Wet/Dry vacuum with HEPA filter (optional);
- VAPOR PIN® installation/extraction tool;
- Dead blow hammer;
- VAPOR PIN® flush mount cover, if desired;
- VAPOR PIN® drilling guide, if desired;

- VAPOR PIN® protective cap; and
- VOC-free hole patching material (hydraulic cement) and putty knife or trowel for repairing the hole following the extraction of the VAPOR PIN®.



Figure 1. Assembled VAPOR PIN®

Installation Procedure:

- 1) Check for buried obstacles (pipes, electrical lines, etc.) prior to proceeding.
- 2) Set up wet/dry vacuum to collect drill cuttings.
- 3) If a flush mount installation is required, drill a 1½-inch (38mm) diameter hole at least 1¾-inches (45mm) into the slab. Use of a VAPOR PIN® drilling guide is recommended.
- 4) Drill a 5/8-inch (16mm) diameter hole through the slab and approximately 1-inch (25mm) into the underlying soil to form a void. Hole must be 5/8-inch (16mm) in diameter to ensure seal. It is recommended that you use the drill guide.

VAPOR PIN® protected under US Patent # 8,220,347 B2, US 9,291,531 B2 and other patents pending

- 5) Remove the drill bit, brush the hole with the bottle brush, and remove the loose cuttings with the vacuum.
- 6) Place the lower end of VAPOR PIN® assembly into the drilled hole. Place the small hole located in the handle of the installation/extraction tool over the vapor pin to protect the barb fitting, and tap the vapor pin into place using a dead blow hammer (Figure 2). Make sure the installation/extraction tool is aligned parallel to the vapor pin to avoid damaging the barb fitting.



Figure 2. Installing the VAPOR PIN®

During installation, the silicone sleeve will form a slight bulge between the slab and the VAPOR PIN® shoulder. Place the protective cap on VAPOR PIN® to prevent vapor loss prior to sampling (Figure 3).



Figure 3. Installed VAPOR PIN®

- 7) For flush mount installations, cover the vapor pin with a flush mount cover, using either the plastic cover or the optional stainless-steel Secure Cover (Figure 4).



Figure 4. Secure Cover Installed

- 8) Allow 20 minutes or more (consult applicable guidance for your situation) for the sub-slab soil-gas conditions to re-equilibrate prior to sampling.
- 9) Remove protective cap and connect sample tubing to the barb fitting of the VAPOR PIN®. This connection can be made using a short piece of Tygon™ tubing to join the VAPOR PIN® with the

Nylaflow tubing (Figure 5). Put the Nylaflow tubing as close to the VAPOR PIN® as possible to minimize contact between soil gas and Tygon™ tubing.



Figure 5. VAPOR PIN® sample connection

10) Conduct leak tests in accordance with applicable guidance. If the method of leak testing is not specified, an alternative can be the use of a water dam and vacuum pump, as described in SOP Leak Testing the VAPOR PIN® via Mechanical Means (Figure 6). For flush-mount installations, distilled water can be poured directly into the 1 1/2 inch (38mm) hole.



Figure 6. Water dam used for leak detection

11) Collect sub-slab soil gas sample or pressure reading. When finished, replace

the protective cap and flush mount cover until the next event. If the sampling is complete, extract the VAPOR PIN®.

Extraction Procedure:

- 1) Remove the protective cap, and thread the installation/extraction tool onto the barrel of the VAPOR PIN® (Figure 7). Turn the tool clockwise continuously, don't stop turning, the VAPOR PIN® will feed into the bottom of the installation/extraction tool and will extract from the hole like a wine cork, DO NOT PULL.
- 2) Fill the void with hydraulic cement and smooth with a trowel or putty knife.



Figure 7. Removing the VAPOR PIN®

- Prior to reuse, remove the silicone sleeve and protective cap and discard. Decontaminate the VAPOR PIN® in a hot water and Alconox® wash, then heat in an oven to a temperature of 265° F (130° C) for 15 to 30 minutes. For both steps, STAINLESS – ½ hour, BRASS 8 minutes

- 3) Replacement parts and supplies are available online.

ATTACHMENT C




SERIES LPG4

2.5" LOW PRESSURE GAGE

1.5% Full-Scale Accuracy in a 2.5" Gage

CALIBRATION SERVICES AVAILABLE

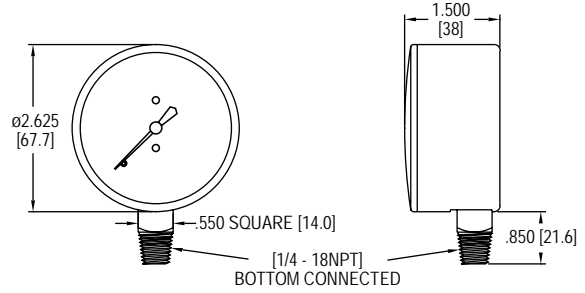

Our **Series LPG4 2.5" Low Pressure Gage** offers top of the line performance and accuracy for pressure and vacuum applications up to and including 160 in. w.c. The LPG4 is constructed from a single beryllium-copper diaphragm affixed to a precision-machined brass plate. This innovative design, together with a high-precision, milled-teeth brass movement and nickel-silver pinion and bearing surface, provide the user with a top of the line low pressure instrument.

BENEFITS/FEATURES

- Low pressure gage provides a selection to meet specific applications
- Specified with high ambient and process temperature ratings mean more robust uses and longer service-life
- High accuracy gage for applications requiring more precise measurement is a concern

APPLICATIONS

- Air flow indication
- Liquid level
- Draft measurement

SPECIFICATIONS


Service: Compatible gases and liquids.
Wetted Materials: Brass and beryllium copper.
Housing: Drawn steel, black finish.
Lens: Polycarbonate (removable).
Accuracy: ±1.5% FS.
Pressure Limit: 100% of range scale.
Temperature Limits: Process: -40 to 160°F (-40 to 70°C); Ambient: -40 to 140°F (-40 to 60°C).
Size: 2.5" (63 mm).
Process Connections: 1/4" male NPT.
Enclosure Rating: NEMA 3 (IP54).
Weight: 7.3 oz (0.21 kg).

MODEL CHART

Model	Range	Model	Range
LPG4-D7122N	-10 to 0 in w.c. (-2.5 to 0 kPa)	LPG4-D8322N	0 to 40 in w.c. (0 to 10 kPa)
LPG4-D7222N	-15 to 0 in w.c. (-4 to 0 kPa)	LPG4-D8422N	0 to 60 in w.c. (0 to 15 kPa)
LPG4-D7322N	-25 to 0 in w.c. (-6 to 0 kPa)	LPG4-D8522N	0 to 80 in w.c. (0 to 20 kPa)
LPG4-D7422N	-40 to 0 in w.c. (-10 to 0 kPa)	LPG4-D8622N	0 to 100 in w.c. (0 to 25 kPa)
LPG4-D7522N	-60 to 0 in w.c. (-15 to 0 kPa)	LPG4-D8722N	0 to 160 in w.c. (0 to 40 kPa)
LPG4-D7622N	-80 to 0 in w.c. (-20 to 0 kPa)	LPG4-D8922N	-4 to 0 to 6 in w.c. (-1 to 0 to 1.5 kPa)
LPG4-D7722N	-100 to 0 in w.c. (-25 to 0 kPa)	LPG4-D9022N	-6 to 0 to 10 in w.c. (-1.5 to 0 to 2.5 kPa)
LPG4-D7822N	-160 to 0 in w.c. (-40 to 0 kPa)	LPG4-D9122N	-8 to 0 to 16 in w.c. (-2 to 0 to 4 kPa)
LPG4-D7922N	-235 to 0 in w.c. (-60 to 0 kPa)	LPG4-D9222N	-16 to 0 to 24 in w.c. (-4 to 0 to 6 kPa)
LPG4-D8022N	0 to 10 in w.c. (0 to 2.5 kPa)	LPG4-D9322N	-24 to 0 to 40 in w.c. (-6 to 0 to 10 kPa)
LPG4-D8122N	0 to 15 in w.c. (0 to 3.75 kPa)	LPG4-D9422N	-30 to 0 to 50 in w.c. (-7.5 to 0 to 12.5 kPa)
LPG4-D8222N	0 to 25 in w.c. (0 to 6 kPa)	LPG4-D9522N	-40 to 0 to 60 in w.c. (-10 to 0 to 15.0 kPa)

OPTIONS

Use order code:	Description
NISTCAL-PG1	NIST traceable calibration certificate

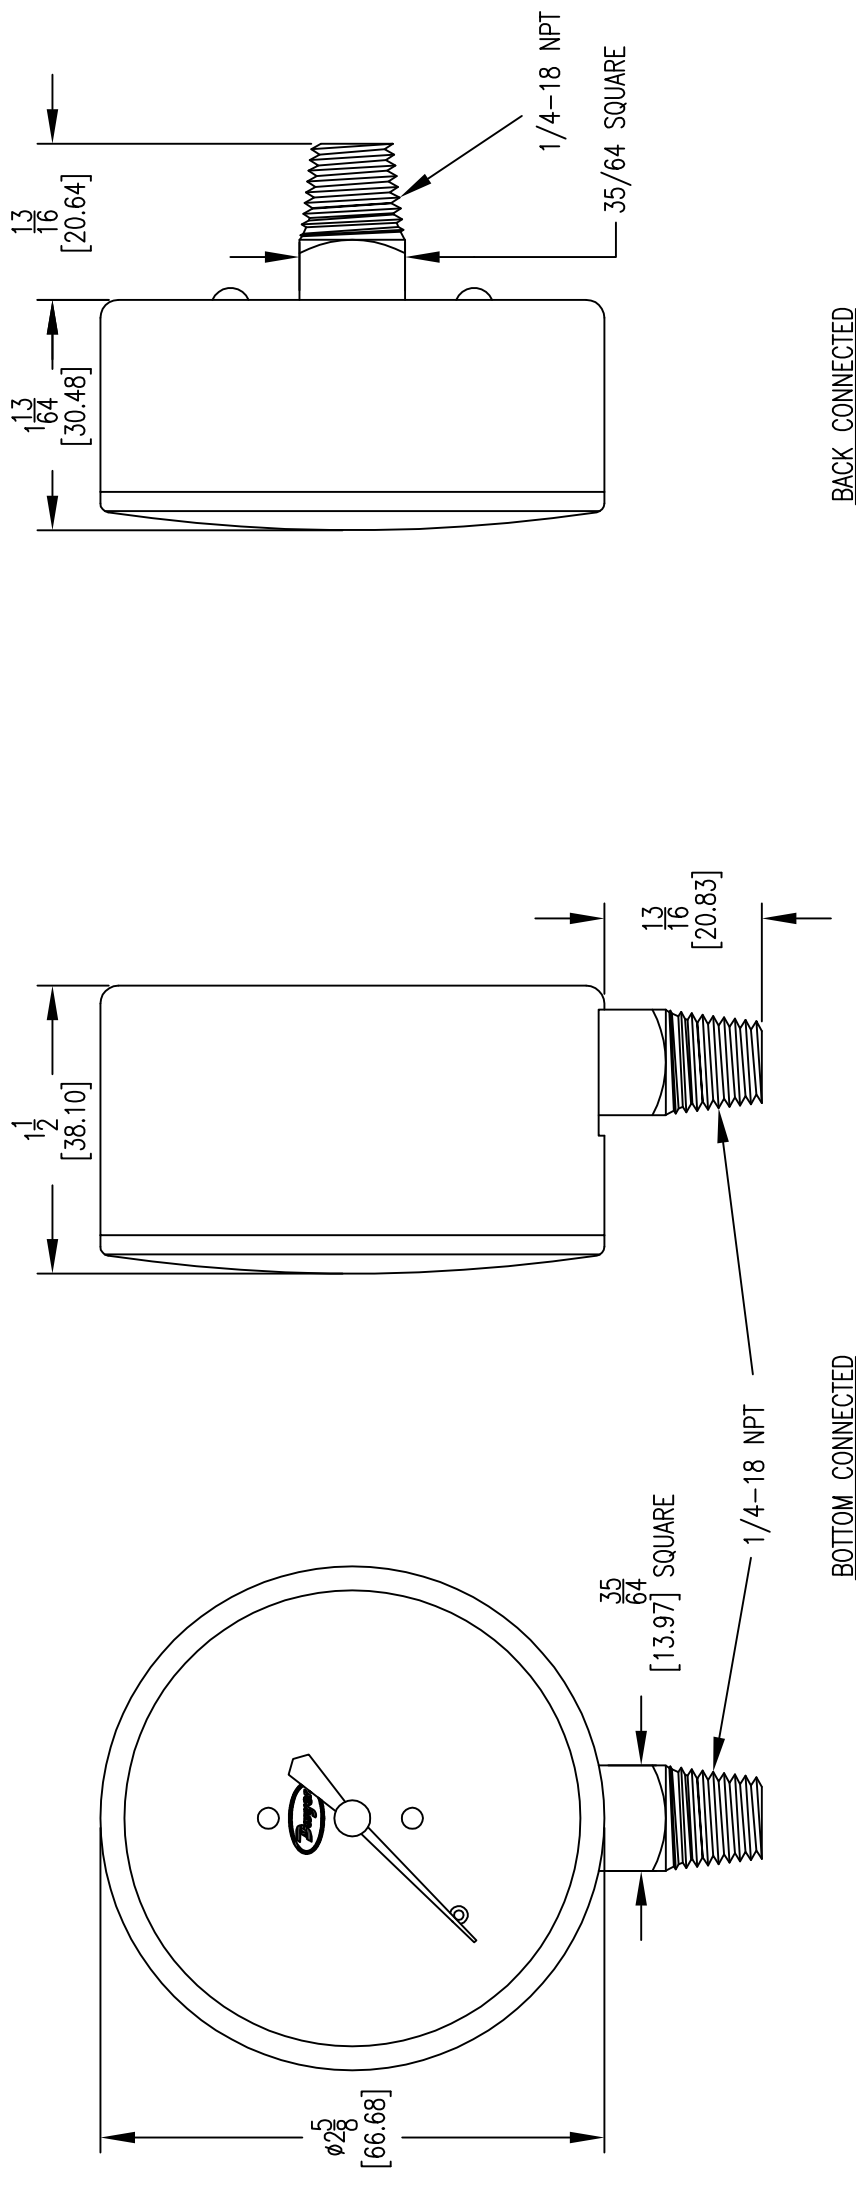

BACK CONNECTED

BOTTOM CONNECTED

Ⓢ = CRITICAL DIMENSION
 STANDARD TOLERANCES UNLESS NOTED:
 ALL DECIMAL DIMENSIONS ± .005
 ALL ANGLES ± 1°

SCALE 1:1

DATE		NAME		MATERIAL	
DWN BY		LPG4 SERIES		FINISH	
CHKD		2.5" LOW PRESSURE GAGE			
APPD					
BY/DATE				ACAD2002	
CHANGES				FR. NO. 3	
NO.				Dwyer Instruments, Inc. MICHIGAN CITY, INDIANA 46360 U.S.A.	

NOTICE: This drawing and the principles and elements of design embodied therein are the exclusive property of DWYER INSTRUMENTS, INC. and are not to be communicated, disclosed, reproduced or used except as previously authorized in writing by such corporation and must not be submitted to outside parties for examination without the written consent of said corporation.

ATTACHMENT D

Digital Pressure Gauge with Alarm

The GBR 25 series alarm gauges are designed to meet the requirements of national standards for system monitors and alarms and provide for additional local alerts and remote monitoring when used with the Obar EDG wireless network.


Scale 0-40 inches WC eliminates need for multiple gauges.

Visual and audible alarm included and factory set at 1" WC

Fully programmable for Display, Alarm, Delay, and Units.

Options

Second adjustable relay for triggering additional alarms.
Optional 4-20 MA or 0-10 output for data.

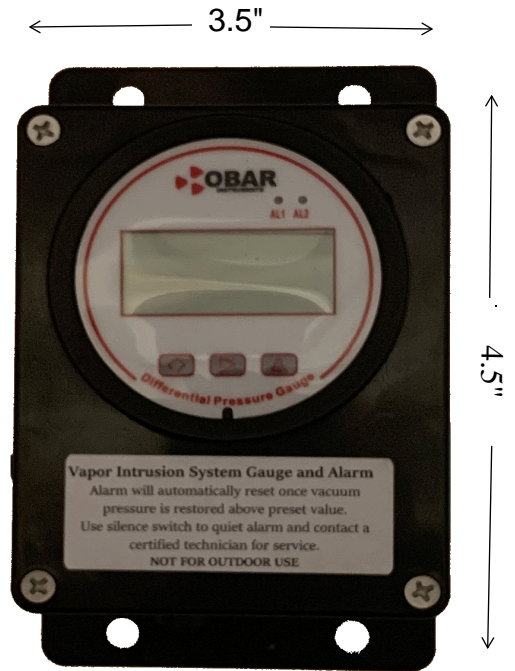

Specifications

Medium: Non-combustible, non-corrosive air, insensitive to moisture, dust, condensation and oil

Working Temp.: 20~70°C

Medium Temp.: 0~60°C

Temp. Compensation: 0~50°C

Working Pressure: overload 10xFS, burst 15xFS

Display: 5 bits LCD, with engineering unit & backlight

Output: 0-10V / 4-20mA (3 wires)

Output load: ≤500Ω (current), ≥2KΩ (voltage)

Relay Output: 2×SPST, 3A/30VDC, 3A/250VAC or 1xBuzzer

Accuracy: up to ±1.0%FS(±2.0%FS@25Pa range)

Long term stability: ±0.5%FS /Year

Thermal effect: <0.05%FS/°C (zero), <0.08%FS/°C(FS)

Power type 16~28VDC/AC

24V Power Supply included

Process Connection: 5mm ID tubing, two pairs (left/back)

Keys: 3 touch buttons

Protection: IP54

Approval: CE

Display update time: selectable for 0.5/1/5/10s (default 1s)

Pricing: \$125 per unit

Add \$30 for 4-20 mA / 0-10V version

Custom options and bulk order pricing available. Call or email for details.

Related Products


EDG Wireless Gateway and Sensors



DPT Sensor



Pitot Tube



GBR Blower



Low Profile Custom Alarm Panel

Features

Pre-wired solution for SSDS systems.

Vacuum tube connections pre-labeled to corresponding gauge.



Hinge orientation can be customized.

Secondary relay can be used for additional alarm or upgrade to a 0-10v output for remote monitoring capability with Obar EDG Wireless Telemetry.

Low profile, wall mountable design.

Power supply included.

Custom labeling available.

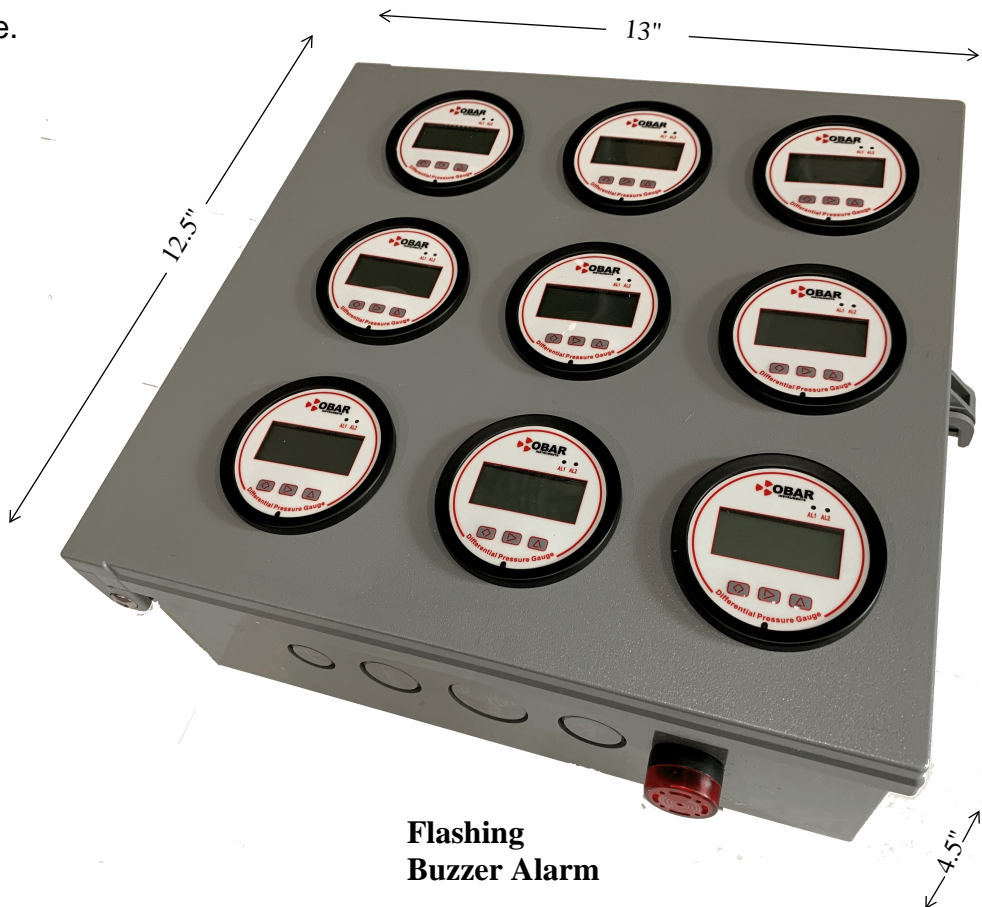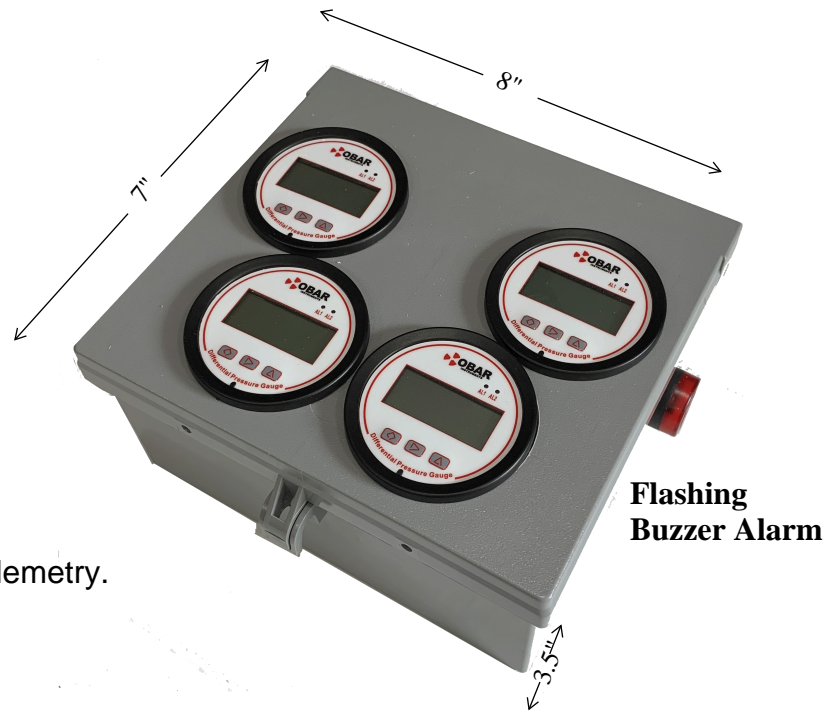

GBR 25 Mini Digital Differential Pressure Gauge With Alarm



System alarms and monitoring made simple and affordable.

Finally a product that has what you need and can be easily installed.

The GBR 25 is a compact stand alone system gauge with an audible and visual alarm that works for VOC and Radon systems operating at system pressures greater than 2" wc. Included is a second relay that can be used to trigger additional alarms.

Includes Power supply

Optional 4-20 MA or 0-10 outputs can be used to monitor system pressure.

Contact OBAR for a quote to build custom alarm panels for your needs.

Applications and features

- Scale 0-40 inches WC eliminates need for multiple gauges.
- Visual and audible alarm included and factory set at 1" WC
The alarm set point can be changed in the field.
- Second adjustable relay for triggering additional alarms.
- Optional 4-20 MA or 0-10 output for data.
- Accuracy is up to $\pm 1\%$ FS, with large LCD display.
- Function keys: zero reset, units select, display update time, automatic sleep time, alarm, etc.

Specifications

Medium: Non-combustible, non-corrosive air, insensitive to moisture, dust, condensation and oil

Working Temp.: 20~70°C

Medium Temp.: 0~60°C

Temp. Compensation: 0~50°C

Working Pressure: overload 10xFS, burst 15xFS

Display: 5 bits LCD, with engineering unit & backlight

Output: 0-10V / 4-20mA (3 wires)

Output load: $\leq 500\Omega$ (current), $\geq 2K\Omega$ (voltage)

Relay Output: 2xSPST, 3A/30VDC, 3A/250VAC or 1xBuzzer

Accuracy: up to $\pm 1.0\%$ FS ($\pm 2.0\%$ FS@25Pa range)

Long term stability: $\pm 0.5\%$ FS /Year

Thermal effect: $< 0.05\%$ FS/°C (zero), $< 0.08\%$ FS/°C(FS)

Power type 16~28VDC/AC

24V Power Supply included

Process Connection: 5mm ID tubing, two pairs (left/back)

Keys: 3 touch buttons

Protection: IP54

Approval: CE

Display update time: selectable for 0.5/1/5/10s (default 1s)



Other OBAR products you may be interested in.

DPT(DPT-F Flush Mount) Differential Pressure Transmitter



Pricing: \$125 per unit

Add \$20 for 4-20 mA / 0-10V version

Custom options and bulk order pricing available. Call or email for details.

Low Profile Custom Alarm Panel

Features

Pre-wired solution for SSDS systems.

Vacuum tube connections pre-labeled to corresponding gauge.



Hinge orientation can be customized.

Secondary relay can be used for secondary alarm/MarCell Pro monitor or upgrade to a 4-20 mA/0-10v output for remote monitoring capability.

Low profile, wall mountable design.

Power supply included.

Custom labeling available.

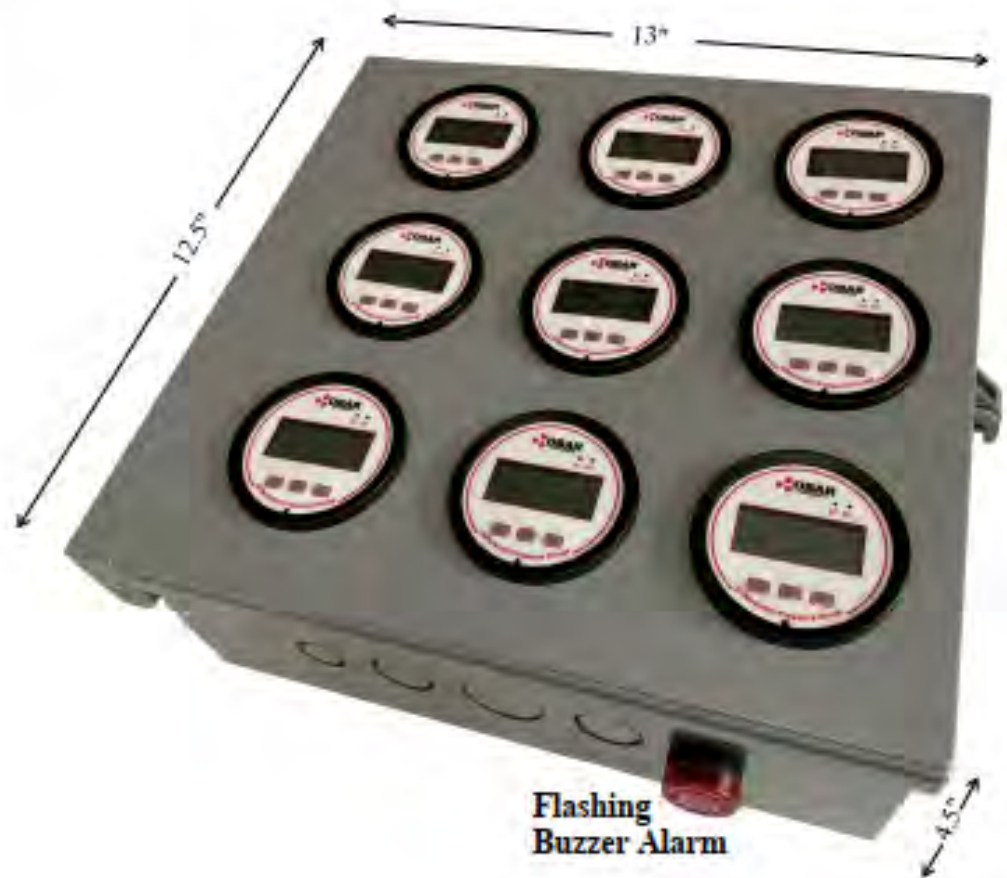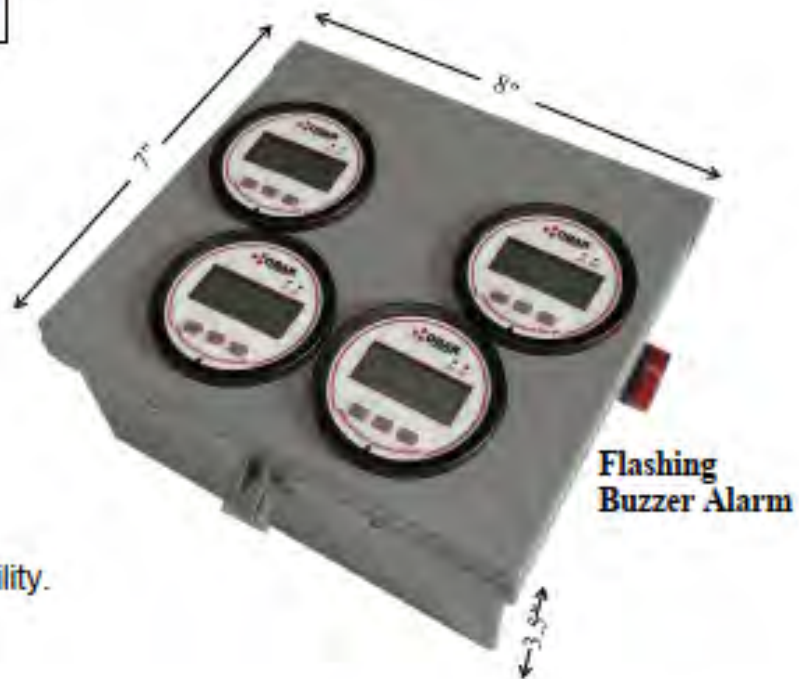

Selection Guide for GBR 25 System Gauge

The GBR 25 series alarm gauges are designed to meet the requirements of national standards for system monitors and alarms and provide for additional local alerts and remote monitoring.

Model	Gauge	Light	Buzzer	Silence	Relay	0-10v 4-20ma	Power Supply	Battery	Remote Alerts and Data Monitoring Capability
GBR 25R	0-40" LCD	yes	yes	yes (disable switch)	yes 2	no	yes	no	OBAR EDGE or any system that accepts Dry Contacts
GBR 25RT	0-40" LCD	yes	yes	yes (disable switch)	yes 2	yes	yes	no	OBAR EDG or any system that accepts 0-10v 40-20ma
GBR 25	0-40" LCD	yes	yes	yes Push to Silence*	no	no	yes	no	Local alarm only
GBR 25T	0-40" LCD	yes	yes	yes Push to Silence*	no	yes	yes	no	OBAR EDG or any system that accepts 0-10v 40-20ma

Choosing the Right Gauge

System pressure monitor with local visual and audible alarm only.

While all of the gauges meet these minimum standards the **GBR 25** is the most cost effective choice. The GBR 25 is a 0-40" LCD gauge with programmable alarm settings for a visual and audible alarm. The gauge has push to silence feature that will silence the alarm and will reset when system vacuum is restored.



System pressure monitor with local visual and audible alarm and output for remote data monitoring.

The best choice would be the **GBR 25T** which has all the features of the GBR 25 and has both 0-10V and 4-20ma. Pair this gauge with the OBAR EDG wireless remote monitoring so you can view and manage your system data and manage your text and email alerts. This gauge can also be integrated with existing systems that use either 0-10V or 4-20ma (if using 4-20ma please provide voltage before ordering) If an addition local alarm is required in separate area of the building this can be accomplished in two ways. If you are using the EDG remote monitoring system a wireless relay can be triggered by the system to control an alarm. If you are using a wired monitoring system the **GBR 25RT** has a relay that can be used to control an additional alarm.

System pressure monitor with local visual and audible alarm and relay to control additional devices or provide for a dry contact alarm.


The **GBR 25R** has a relay that can be used to control additional alarms or notifications through a device that accepts only a dry contact signal.

All GBR series gauges are available as single units or custom multi-gauge panels

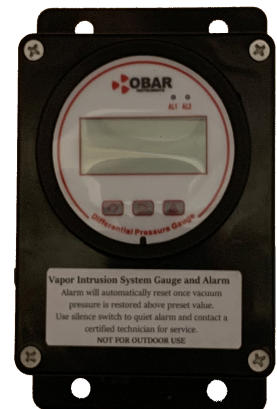

GBR 25

GBR 25A AT Alarm Programming Guide

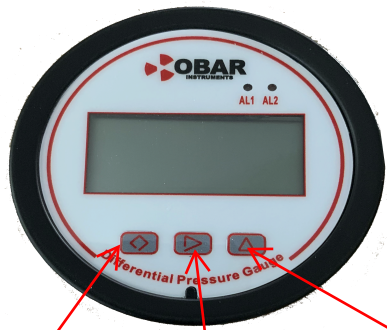

Save/Set Scroll Right Adjust Digit

P081 Pressure Units

(Preset to Inches of WC)

1. Activate **P081** programming
2. Press **Adjust Digit** button to select a unit.
1= Pascal, 2=K Pascal, 3= mbar,
4= mm W.C., 5= in W.C.
3. Hold **Save/Set** button to input new settings

P075 Refresh Delay

(Preset to refresh every 5 Sec)

1. Activate **P075** programming
2. Press **Adjust Digit** button to select refresh delay.
Refresh delay choices are 0.5, 1, 5, 10 seconds
3. Hold **Save/Set** button to input new settings

P302 Alarm Audible option

(Preset Audible & Visual)

1. Activate **P302** programming
2. Press **Adjust Digit** button to select
1 for Audible & Visual alarm
0 for Visual alarm only.
3. Hold **Save/Set** button to input new settings

The gauge is pre-set to:

Audible and Visual alarm with visual being displayed as "Lo"

Display is set to:

inches of W.C. Refresh: every 5 seconds. Alarm: activated at pressure less than 1.0" W.C. Alarm Delay: 0

Available Programs

The GBR series gauge/alarm are programmable for the following changes indicated by P# and setting #

P081 Display pressure readings in units of: #1 pascals, #2 K-pascals, #3 mbar, #4 mm water column, #5 inches water column

P075 Refresh display: 0.5, 1, 5, or 10 seconds

P301 Alarm: #1 Active or #2 Disabled

P301 Alarm activated when pressure is: #1 Low, #2 High, #3 Between Low and High, #4 Outside of Low and High limits

P302 Alarm set as Audible & Visual or Visual only

Steps to Access a Program

In each case to change a program setting use the following initial steps:

Press **Save/Set** button and **P000** will appear. Press **Scroll Right** button to Select first digit **0**. Press **Adjust Digit** button to enter **program number** for that digit.

Press **Scroll Right** button to select second, third or first digit and press **Adjust Digit** button to set the **program number**.

Once **program number** is set, press **Save/Set** Button to begin adjusting the program setting to the desired function.

After inputting the number representing the desired function, hold the **Save/Set** button to input the setting for that function and the gauge will return to displaying the system pressure.

To Re Zero Display

1. Disconnect tubing from suction pipe.
2. Hold **Scroll Right** button for 5 seconds
3. Display should read zero
4. Reconnect tubing into the suction pipe

P810 Factory Reset

(Factory Setting is alarm off)

1. Activate **P810** programming
2. Hold **Save/Set** button to revert to Factory Settings

P301 Relay Activation Pressure

(Preset to 250 Pa or 1.0" WC)

1. Activate **P301** programming
2. Press **Adjust Digit** button and select 1.
0 turns off visual & audible alarm
2, 3 & 4 are high versus low alarm variations
3. Press **Save/Set** button to next set low activation pressure
4. Pressure setting is made in Pascals (**00250.0 Pa = 1"WC**)
5. Use **Scroll Right** and **Adjust Digit** button to
specify desired low activation pascal pressure
6. Press **Save/Set** button to set specified low pressure
7. Next display is high pressure setting used for high low variations
High pressure setting used if 2, 3 or 4 was initially programmed.
8. Press **Save/Set** button to next set and specify 0 for **Alarm Delay**.
9. Press **Save/Set** button to next specify 0 for **Restore Delay**
- 10 Press **Save/Set** Button and system pressure is displayed

ATTACHMENT E



MONITORING & ALERTING




HOW LONG BEFORE YOU KNOW SOMETHING IS WRONG?

COUNTLESS INDUSTRIES DEPEND ON SENSAPHONE FOR THE MOST COMPREHENSIVE REMOTE MONITORING SOLUTIONS AVAILABLE. WHEN YOU NEED TO BE ABSOLUTELY SURE A REMOTE SITE IS STABLE, SECURE, AND MONITORED AROUND THE CLOCK, THERE'S NO SUBSTITUTE FOR CERTAINTY.



CLOUD-BASED MONITORING... CONVENIENT WEB-BASED MANAGEMENT

- **Supervised** internet connection assures the Sentinel is online and monitoring at all times
- **Manage** an unlimited number of devices from one account
- **Monitor** up to 12 external sensors or equipment status
- **Receive** an e-mail, phone call, or text message when an alarm is detected
- **Real time** status updates available
- **Included** battery backup
- **Cellular** coverage available from AT&T, Verizon & Rogers

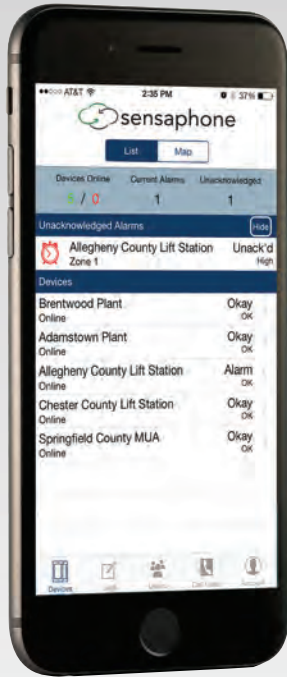

ENVIRONMENTAL MONITORING FOR THE MOBILE AGE

The cloud-based Sentinel allows you to monitor remote facilities and environments and check critical conditions of your sensitive commodities with the same degree of certainty you've come to expect from Sensaphone.

It takes the burden out of managing your system by giving you access to your readings from anywhere using a simple, powerful web-based interface and mobile app. If there's a disruption, you'll be the first to know. Alerts can be sent straight to your mobile device—keeping you updated and giving you peace-of-mind wherever you are.

Mobile app available for Android and iPhone



IN THE CLOUD

The Sentinel system stores all sensor readings in the cloud, which provides unlimited information storage. Multiple devices can be managed from one account using intuitive web-based management tools. Enhanced data logging capabilities allow users to print, graph or export accurate historical records. The Sentinel system also can produce event reports and deliver them daily via e-mail, as well as generate an audit trail of all user data activities, edits or deletions. The device is Ethernet based, but it is available with a cellular option for locations that do not have Internet access.

Learn More:
www.sensaphone.com/Sentinel

Powered by America's largest cellular networks




SENSAPHONE®
901 TRYENS ROAD
ASTON, PA 19014

PH: 877-373-2700
F: 610-558-0222

WWW.SENSAPHONE.COM/Sentinel

Distributed By:

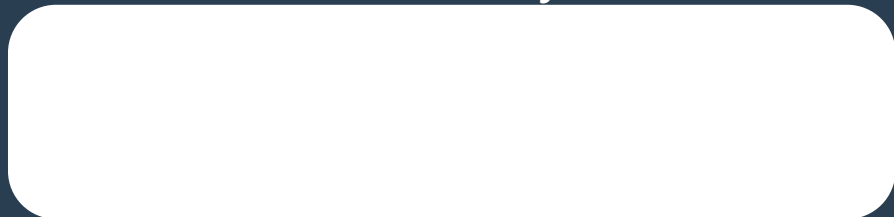

LIT-1035 © SENSAPHONE 3/2016

SENSAPHONE[®]

REMOTE MONITORING SOLUTIONS



Sensaphone Sentinel with Cellular Modem

Technical Specifications

ALARM NOTIFICATION METHODS:

- E-Mail, Text Messages, Voice Phone Calls
- Programmable alarm escalation levels
- Comprehensive scheduling per input, profile, and alarm destination
- Unlimited number of User Profiles
- Multiple contact types per user

INPUTS:

- 12 Universal Inputs
- Normally Open / Normally Closed Dry Contact
- 2.8K / 10K Thermistor
- 4-20mA Current Loop
- Pulse Count
- 12 Bit Resolution

TEMPERATURE SENSING RANGE:

-109° to 168°F | -85° to 76°C

RELAY OUTPUT:

Programmable. Rated for 1A 30VAC/ 1A 30VDC

DATA LOGGING:

- Unlimited samples securely stored on the Sentinel servers
- Programmable sampling Interval - 1 min to 24 hrs
- User programmable channel selection

CELLULAR COMMUNICATION:

4G Cellular Modem for use on Verizon, AT&T or Rogers

BATTERY BACKUP:

- 4.8V 2000mAHr NiMh Battery pack (included)
- 12V 3000 mAHR SLA Battery (included)
- Provides 8 hours of backup

LOCAL INDICATORS:

- 12 Alarm Status LEDs
- Power LED • Online LED
- Standby LED • Ethernet link and Activity LEDs

POWER REQUIREMENTS:

- Power Requirement: 12-24DC
- Comes with 12VDC plug-in power supply
- International power options available
- Current Draw: 300mA at 24VDC

ENVIRONMENTAL:

- Operating Humidity:**
0-90% RH, non-condensing
- Operating Temperature:**
32° to 122°F | 0° to 50°C

PHYSICAL:

- Dimensions:**
12.5 x 12.2 x 7.0" | 318 x 310 x 178mm
- Weight:** 10.5 lbs. | 4.7 kg

STANDARDS:

FCC Part 15 – Class A Compliant

ENCLOSURE:

NEMA-4X rated plastic housing

ANTENNA:

4G Frequencies: 698-960/1710-2700MHz

Peak gain: 5dBi

Pattern: Omni-directional

Height: 6.45" (164mm)

Diameter: 1.90" (48mm)

IP Rating: IP-66



INSTALLATION AND SETUP GUIDE
VERSION 2.2

SENSAPHONE[®]
REMOTE MONITORING SOLUTIONS

Sentinel Installation and Setup Guide

Every effort has been made to ensure that the information in this document is complete, accurate and up-to-date. Sensaphone assumes no responsibility for the results of errors beyond its control. Sensaphone also cannot guarantee that changes in equipment made by other manufacturers, and referred to in this manual, will not affect the applicability of the information in this manual.

Copyright © 2015 by SENSAPHONE®

First Edition, version 2.2, June 2024

Written and produced by SENSAPHONE®.

Please address comments on this publication to:

SENSAPHONE®

901 Tryens Road

Aston, PA 19014

Important Safety Instructions

Your Sentinel has been carefully designed to give you years of safe, reliable performance. As with all electrical equipment, however, there are a few basic precautions you should take to avoid hurting yourself or damaging the unit:

- Read the installation and operating instructions in this guide carefully. Be sure to save it for future reference.
- Read and follow all warning and instruction labels on the product itself.
- To protect the Sentinel from overheating, make sure all openings on the unit are not blocked. Do not place on or near a heat source, such as a radiator or heat register.
- Do not use your Sentinel near water, or spill liquid of any kind into it.
- Be certain that your power source matches the rating in the specifications of this manual. If you're not sure of the type of power supply to your facility, consult your dealer or local power company.
- Do not allow anything to rest on the power cord. Do not locate this product where the cord will be abused by persons walking on it.
- Do not overload wall outlets and extension cords, as this can result in the risk of fire or electric shock.
- Never push objects of any kind into this product through ventilation holes as they may touch dangerous voltage points or short out parts that could result in a risk of fire or electric shock.
- To reduce the risk of electric shock, do not disassemble this product, but return it to Sensaphone Customer Service, or another approved repair facility, when any service or repair work is required. Opening or removing covers may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock when the unit is subsequently used.
- If anything happens that indicates that your Sentinel is not working properly or has been damaged, unplug it immediately and follow the procedures in the manual for having it serviced. Return the unit for servicing under the following conditions:
 1. The power cord or plug is frayed or damaged.
 2. Liquid has been spilled into the product or it has been exposed to water.
 3. The unit has been dropped, or the enclosure is damaged.
 4. The unit doesn't function normally when you're following the operating instructions.
- To reduce the risk of fire or injury to persons, read and follow these instructions:
 1. Use only the specified type and size battery.
 2. Do not dispose of the battery in a fire. The cell may explode. Check with local codes for possible special disposal instructions.
 3. Do not open or mutilate batteries. Released electrolyte is corrosive and may cause damage to the eyes or skin. It may be toxic if swallowed.
 4. Exercise care in handling batteries in order not to short the battery with conducting materials such as rings, bracelets, and keys. The battery or conductor may overheat and cause burns.
 5. Remove main power connections before replacing the battery.

FCC Requirements

Part 15: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

2 YEAR LIMITED WARRANTY

PLEASE READ THIS WARRANTY CAREFULLY BEFORE USING THE PRODUCT.

THIS LIMITED WARRANTY CONTAINS SENSAPHONE'S STANDARD TERMS AND CONDITIONS. WHERE PERMITTED BY THE APPLICABLE LAW, BY KEEPING YOUR SENSAPHONE PRODUCT BEYOND THIRTY (30) DAYS AFTER THE DATE OF DELIVERY, YOU FULLY ACCEPT THE TERMS AND CONDITIONS SET FORTH IN THIS LIMITED WARRANTY.

IN ADDITION, WHERE PERMITTED BY THE APPLICABLE LAW, YOUR INSTALLATION AND/OR USE OF THE PRODUCT CONSTITUTES FULL ACCEPTANCE OF THE TERMS AND CONDITIONS OF THIS LIMITED WARRANTY (HEREINAFTER REFERRED TO AS "LIMITED WARRANTY OR WARRANTY"). IF YOU DO NOT AGREE TO THE TERMS AND CONDITIONS THIS WARRANTY, INCLUDING ANY LIMITATIONS OF WARRANTY, INDEMNIFICATION TERMS OR LIMITATION OF LIABILITY, THEN YOU SHOULD NOT USE THE PRODUCT AND SHOULD RETURN IT TO THE SELLER FOR A REFUND OF THE PURCHASE PRICE. THE LAW MAY VARY BY JURISDICTION AS TO THE APPLICABILITY OF YOUR INSTALLATION OR USE ACTUALLY CONSTITUTING ACCEPTANCE OF THE TERMS AND CONDITIONS HEREIN AND AS TO THE APPLICABILITY OF ANY LIMITATION OF WARRANTY, INDEMNIFICATION TERMS OR LIMITATIONS OF LIABILITY.

- 1. WARRANTOR:** IN THIS WARRANTY, WARRANTOR SHALL MEAN "DEALER, DISTRIBUTOR, AND/OR MANUFACTURER."
- 2. ELEMENTS OF WARRANTY:** THIS PRODUCT IS WARRANTED TO BE FREE FROM DEFECTS IN MATERIALS AND CRAFTSMANSHIP WITH ONLY THE LIMITATIONS AND EXCLUSIONS SET OUT BELOW.
- 3. WARRANTY AND REMEDY:** TWO-YEAR WARRANTY — IN THE EVENT THAT THE PRODUCT DOES NOT CONFORM TO THIS WARRANTY AT ANY TIME DURING THE TIME OF TWO YEARS FROM ORIGINAL PURCHASE, WARRANTOR WILL REPAIR THE DEFECT AND RETURN IT TO YOU AT NO CHARGE.

THIS WARRANTY SHALL TERMINATE AND BE OF NO FURTHER EFFECT AT THE TIME THE PRODUCT IS: (1) DAMAGED BY EXTRANEOUS CAUSE SUCH AS FIRE, WATER, LIGHTNING, ETC. OR NOT MAINTAINED AS REASONABLE AND NECESSARY; OR (2) MODIFIED; OR (3) IMPROPERLY INSTALLED; OR (4) MISUSED; OR (5) REPAIRED OR SERVICED BY SOMEONE OTHER THAN WARRANTORS' AUTHORIZED PERSONNEL OR SOMEONE EXPRESSLY AUTHORIZED BY WARRANTOR'S TO MAKE SUCH SERVICE OR REPAIRS; (6) USED IN A MANNER OR PURPOSE FOR WHICH THE PRODUCT WAS NOT INTENDED; OR (7) SOLD BY ORIGINAL PURCHASER.

LIMITED WARRANTY, LIMITATION OF DAMAGES AND DISCLAIMER OF LIABILITY FOR DAMAGES: THE WARRANTOR'S OBLIGATION UNDER THIS WARRANTY IS LIMITED TO REPAIR OR REPLACEMENT OF THE PRODUCT, AT THE WARRANTOR'S OPTION AS TO REPAIR OR REPLACEMENT. IN NO EVENT SHALL WARRANTORS BE LIABLE OR RESPONSIBLE FOR PAYMENT OF ANY INCIDENTAL, CONSEQUENTIAL, SPECIAL AND/OR PUNITIVE DAMAGES OF ANY KIND, INCLUDING BUT NOT LIMITED TO ANY LABOR COSTS, PRODUCT COSTS, LOST REVENUE, BUSINESS INTERRUPTION LOSSES, LOST PROFITS, LOSS OF BUSINESS, LOSS OF DATA OR INFORMATION, OR FINANCIAL LOSS, FOR CLAIMS OF ANY NATURE, INCLUDING BUT NOT LIMITED TO CLAIMS IN CONTRACT, BREACH OF WARRANTY OR TORT, AND WHETHER OR NOT CAUSED BY WARRANTORS' NEGLIGENCE. IN THE EVENT THAT IT IS DETERMINED IN ANY ADJUDICATION THAT THE LIMITED WARRANTIES OF REPAIR OR REPLACEMENT ARE INAPPLICABLE, THEN THE PURCHASER'S SOLE REMEDY SHALL BE PAYMENT TO THE PURCHASER OF THE ORIGINAL COST OF THE PRODUCT, AND IN NO EVENT SHALL WARRANTORS BE LIABLE OR RESPONSIBLE FOR PAYMENT OF ANY INCIDENTAL, CONSEQUENTIAL, SPECIAL AND/OR PUNITIVE DAMAGES OF ANY KIND, INCLUDING BUT NOT LIMITED TO ANY LOST REVENUE, BUSINESS INTERRUPTION LOSSES, LOST PROFITS, LOSS OF BUSINESS, LOSS OF DATA OR INFORMATION, OR FINANCIAL LOSS, FOR CLAIMS OF ANY NATURE, INCLUDING BUT NOT LIMITED TO CLAIMS IN CONTRACT, BREACH OF WARRANTY OR TORT, AND WHETHER OR NOT CAUSED BY WARRANTORS' NEGLIGENCE.

WITHOUT WAIVING ANY PROVISION IN THIS LIMITED WARRANTY, IF A CIRCUMSTANCE ARISES WHERE WARRANTORS ARE FOUND TO BE LIABLE FOR ANY LOSS OR DAMAGE ARISING OUT OF MISTAKES, NEGLIGENCE, OMISSIONS, INTERRUPTIONS, DELAYS, ERRORS OR DEFECTS IN WARRANTORS' PRODUCTS OR SERVICES, SUCH LIABILITY SHALL NOT EXCEED THE TOTAL AMOUNT PAID BY THE CUSTOMER FOR WARRANTORS' PRODUCT AND SERVICES OR \$250.00, WHICHEVER IS GREATER. YOU HEREBY RELEASE WARRANTORS FROM ANY AND ALL OBLIGATIONS, LIABILITIES AND CLAIMS IN EXCESS OF THIS LIMITATION.

INDEMNIFICATION AND COVENANT NOT TO SUE: YOU WILL INDEMNIFY, DEFEND AND HOLD HARMLESS WARRANTORS, THEIR OWNERS, DIRECTORS, OFFICERS, EMPLOYEES, AGENTS, SUPPLIERS OR AFFILIATED COMPANIES, AGAINST ANY AND ALL CLAIMS, DEMANDS OR ACTIONS BASED UPON ANY LOSSES, LIABILITIES, DAMAGES OR COSTS, INCLUDING BUT NOT LIMITED TO DAMAGES THAT ARE DIRECT OR INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL, AND INCLUDING ATTORNEYS FEES AND LEGAL COSTS, THAT MAY RESULT FROM THE INSTALLATION, OPERATION, USE OF, OR INABILITY TO USE WARRANTORS' PRODUCTS AND SERVICES, OR FROM THE FAILURE OF THE WARRANTORS' SYSTEM TO REPORT A GIVEN EVENT OR CONDITION, WHETHER OR NOT CAUSED BY WARRANTORS' NEGLIGENCE.

YOU AGREE TO RELEASE, WAIVE, DISCHARGE AND COVENANT NOT TO SUE WARRANTORS, THEIR OWNERS, DIRECTORS, OFFICERS, EMPLOYEES, AGENTS, SUPPLIERS OR AFFILIATED COMPANIES, FOR ANY AND ALL LIABILITIES POTENTIALLY ARISING FROM ANY CLAIM, DEMAND OR ACTION BASED UPON ANY LOSSES, LIABILITIES, DAMAGES OR COSTS, INCLUDING BUT NOT LIMITED TO DAMAGES THAT ARE DIRECT OR INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL, AND INCLUDING ATTORNEYS FEES AND LEGAL COSTS, THAT MAY RESULT FROM THE INSTALLATION, OPERATION, USE OF, OR INABILITY TO USE WARRANTORS' PRODUCTS AND SERVICES, OR FROM THE FAILURE OF THE WARRANTORS' SYSTEM TO REPORT A GIVEN EVENT OR CONDITION, WHETHER OR NOT CAUSED BY WARRANTORS' NEGLIGENCE, EXCEPT AS NECESSARY TO ENFORCE THE EXPRESS TERMS OF THIS LIMITED WARRANTY.

EXCLUSIVE WARRANTY: THE LIMITED WARRANTY OR WARRANTIES DESCRIBED HEREIN CONSTITUTE THE SOLE WARRANTY OR WARRANTIES TO THE PURCHASER. ALL IMPLIED WARRANTIES ARE EXPRESSLY DISCLAIMED, INCLUDING: THE WARRANTY OF MERCHANTABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR USE AND THE WARRANTY OF FITNESS FOR A

Sentinel Installation and Setup Guide

PARTICULAR PURPOSE AND THE WARRANTY OF NON-INFRINGEMENT AND/OR ANY WARRANTY ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IT MUST BE CLEAR THAT THE WARRANTORS ARE NOT INSURING YOUR PREMISES OR BUSINESS OR GUARANTEEING THAT THERE WILL NOT BE DAMAGE TO YOUR PERSON OR PROPERTY OR BUSINESS IF YOU USE THIS PRODUCT. YOU SHOULD MAINTAIN INSURANCE COVERAGE SUFFICIENT TO PROVIDE COMPENSATION FOR ANY LOSS, DAMAGE, OR EXPENSE THAT MAY ARISE IN CONNECTION WITH THE USE OF PRODUCTS OR SERVICES, EVEN IF CAUSED BY WARRANTORS' NEGLIGENCE. THE WARRANTORS ASSUME NO LIABILITY FOR INSTALLATION OF THE PRODUCT AND/OR INTERRUPTIONS OF THE SERVICE DUE TO STRIKES, RIOTS, FLOODS, FIRE, AND/OR ANY CAUSE BEYOND SELLER'S CONTROL, FURTHER SUBJECT TO THE LIMITATIONS EXPRESSED IN ANY LICENSE AGREEMENT OR OTHER AGREEMENT PROVIDED BY WARRANTORS TO PURCHASER.

THE AGREEMENT BETWEEN THE WARRANTORS AND THE PURCHASER, INCLUDING BUT NOT LIMITED TO THE TERMS AND CONDITIONS HEREIN SHALL NOT BE GOVERNED BY THE CONVENTION FOR THE INTERNATIONAL SALE OF GOODS. WHERE APPLICABLE, THE UNIFORM COMMERCIAL CODE AS ADOPTED BY THE STATE OF DELAWARE SHALL APPLY.

4. PROCEDURE FOR OBTAINING PERFORMANCE OF WARRANTY: IN THE EVENT THAT THE PRODUCT DOES NOT CONFORM TO THIS WARRANTY, THE PRODUCT SHOULD BE SHIPPED OR DELIVERED FREIGHT PREPAID TO A WARRANTOR WITH EVIDENCE OF ORIGINAL PURCHASE.

5. LEGAL REMEDIES AND DISCLAIMER: SOME JURISDICTIONS MAY NOT ALLOW, OR MAY PLACE LIMITS UPON, THE EXCLUSION AND/OR LIMITATION OF IMPLIED WARRANTIES, INCIDENTAL DAMAGES AND/OR CONSEQUENTIAL DAMAGES FOR SOME TYPES OF GOODS OR PRODUCTS SOLD TO CONSUMERS AND/OR THE USE OF INDEMNIFICATION TERMS. THUS, THE EXCLUSIONS, INDEMNIFICATION TERMS AND LIMITATIONS SET OUT ABOVE MAY NOT APPLY, OR MAY BE LIMITED IN THEIR APPLICATION, TO YOU. IF THE IMPLIED WARRANTIES CAN NOT BE EXCLUDED, AND THE APPLICABLE LAW PERMITS LIMITING THE DURATION OF IMPLIED WARRANTIES, THEN THE IMPLIED WARRANTIES HEREIN ARE TO BE LIMITED TO THE SAME DURATION AS THE APPLICABLE WRITTEN WARRANTY OR WARRANTIES HEREIN. THE WARRANTY OR WARRANTIES HEREIN MAY GIVE YOU SPECIFIC LEGAL RIGHTS THAT WILL DEPEND UPON THE APPLICABLE LAW. YOU MAY ALSO HAVE OTHER LEGAL RIGHTS DEPENDING UPON THE LAW IN YOUR JURISDICTION.

6. CHOICE OF FORUM AND CHOICE OF LAW: IN THE EVENT THAT A DISPUTE ARISES OUT OF OR IN CONNECTION WITH THIS LIMITED WARRANTY, THEN ANY CLAIMS OR SUITS OF ANY KIND CONCERNING SUCH DISPUTES SHALL ONLY AND EXCLUSIVELY BE BROUGHT IN EITHER THE COURT OF COMMON PLEAS OF DELAWARE COUNTY, PENNSYLVANIA OR THE UNITED STATES DISTRICT COURT FOR THE EASTERN DISTRICT OF PENNSYLVANIA.

REGARDLESS OF THE PLACE OF CONTRACTING OR PERFORMANCE, THIS LIMITED WARRANTY AND ALL QUESTIONS RELATING TO ITS VALIDITY, INTERPRETATION, PERFORMANCE AND ENFORCEMENT SHALL BE GOVERNED BY AND CONSTRUED IN ACCORDANCE WITH THE LAWS OF THE STATE OF DELAWARE, WITHOUT REGARD TO THE PRINCIPLES OF CONFLICTS OF LAW.

Effective date 02/25/2015

PHONETICS, INC. d.b.a. SENSAPHONE

901 Tryens Road

Aston, PA 19014

Phone: 610.558.2700 Fax: 610.558.0222

www.sensaphone.com

TABLE OF CONTENTS

CHAPTER 1: INSTALLATION	9
INTRODUCTION	9
FEATURES	9
TECHNICAL SUPPORT	9
ABOUT THIS MANUAL	9
INSTALLATION AND CONFIGURATION	10
PHYSICAL DESCRIPTION	10
LAYOUT	10
SENSOR INPUTS	10
POWER LED (GREEN)	10
ALARM LEDS (RED)	10
ONLINE LED (GREEN)	10
STANDBY LED (YELLOW)	10
ACKNOWLEDGE/ STANDBY BUTTON	11
INSTALLATION	11
PARTS REQUIRED	11
OPERATING ENVIRONMENT	11
POWER	11
CELLULAR ACTIVATION	11
ANTENNA INSTALLATION	11
WALL MOUNT INSTALLATION	12
TURNING THE UNIT ON	12
TURNING THE UNIT OFF	13
POWER SUPPLY	13
CONNECTING SENSORS	14
GENERAL WIRING CONSIDERATIONS	14
NORMALLY OPEN / NORMALLY CLOSED DRY CONTACTS	15
2.8K/10K TEMPERATURE SENSORS	15
4-20MA CURRENT LOOP TRANSDUCERS	16
RELAY OUTPUT WIRING	16
BATTERY BACKUP	17
MEMORY/CLOCK BATTERY	17
RESETTING THE SENTINEL TO FACTORY DEFAULT SETTINGS	17
CHAPTER 2: SET UP	18
DESCRIPTION OF WEB PAGES	18
DASHBOARD	18
STANDBY MODE	19
DEVICE DETAILS	19
CONFIGURE DEVICE	20
ZONE PARAMETER DEFINITIONS	21
MANAGE USERS	22
MANAGE USER GROUPS	25
ALARM DELIVERY	25

LOGS	26
DEVICE MANAGEMENT	27
DEVICE GROUPS	28
ACCOUNT SETTINGS	28
CHAPTER 3: CONFIGURING THE RELAY OUTPUT	29
RELAY OUTPUT WIRING	30
APPENDIX A: WEEKLY TESTING PROCEDURE	31
APPENDIX B: ACCESSORIES	32
APPENDIX C: SPECIFICATIONS	33
ALERT ZONES	33
RELAY OUTPUT	33
DATA LOGGING	33
COMMUNICATION TYPE:	33
POWER SUPPLY	33
BATTERY BACKUP	34
ENVIRONMENTAL	34
PHYSICAL	34
APPENDIX D: THERMISTORS	35
2.8K THERMISTOR DATA	35
10K THERMISTOR DATA	35
APPENDIX E: POST & CONNECTION ERROR CODES	36
APPENDIX F: RETURNING THE UNIT FOR REPAIR	38
APPENDIX G: TEST LOG	39

CHAPTER 1: INSTALLATION

INTRODUCTION

Congratulations on your purchase of the Sentinel Monitoring System. The system is designed to be an easy, cost-effective, cloud-based monitoring and data logging system to notify you when equipment or conditions go awry. The internet browser-based programming makes the device easy to use from any computer or tablet. Monitored conditions can include temperature, humidity levels, pressure, flow, leak detection, UPS systems, and more. The system allows multiple users to be notified immediately of any detected problems. Notification can occur via voice call, e-mail or SMS (text message). The internal battery backup system insures the unit will continue to run if main power fails.

FEATURES

The Sentinel includes the following key features:

- Twelve sensor inputs to monitor environmental conditions and/or alarm contacts from other equipment.
- Battery backup for uninterrupted performance.
- Notification via e-mail, text message (optional) and voice call (optional).
- Relay outputs capable of automatic or manual control.
- Cloud-based user interface for programming, data storage, and alarm delivery.
- Comes standard in weatherproof NEMA 4X enclosure
- Cellular modem available for use with AT&T, Verizon and Rogers service

TECHNICAL SUPPORT

If any questions arise upon installation or operation of the Sentinel, please contact the Sensaphone Technical Service Department at 610.558.2700 and have the following information available:

- Date of purchase _____
- Serial number _____

Technical support is available from 8:00 AM to 5:00 PM, M-F, eastern time.

ABOUT THIS MANUAL

This manual comprises the instructions necessary to install and setup the Sentinel. You should thoroughly read this manual to establish a basic understanding of the system and keep it as a reference.

INSTALLATION AND CONFIGURATION

PHYSICAL DESCRIPTION

The Sentinel is housed in a 14" x 12" x 7.4" enclosure, which can be easily mounted on a wall or back panel.

LAYOUT

The Sentinel has connections for twelve sensor inputs, an Ethernet port, and 12VDC power. See figure below:



Figure 1: Front Layout of the Sentinel

- | | |
|--------------------------------|--------------------------------|
| 1) Acknowledge/Standby Button | 6) Ethernet Jack |
| 2) On/Off Switch | 7) Sensor Input Terminal Strip |
| 3) Power, Online, Standby LEDs | 8) Relay Output Input |
| 4) Alarm LEDs | 9) Battery Module |
| 5) Power Jack | 10) Cellular Modem |

SENSOR INPUTS

The sensor inputs labeled zones 1-12 are designed to interface with normally open/normally closed devices, 2.8K or 10K temperature sensors and 4-20mA transducers.

POWER LED (GREEN)

This light indicates that the Sentinel unit is powered and operational.

ALARM LEDS (RED)

The Alarm LEDs indicate if an alarm exists.

ONLINE LED (GREEN)

This light indicates that the Sentinel unit is communicating with the Sentinel servers.

STANDBY LED (YELLOW)

This light indicates that the Sentinel unit is in standby mode.

ACKNOWLEDGE/ STANDBY BUTTON

When an unacknowledged alarm exists (as indicated by a blinking red alarm LED), briefly press the button and the alarm LED will stop blinking, indicating that the alarm is acknowledged. To enter Standby mode, press and hold the button for at least 5 seconds until the Standby LED lights up, then release. To exit from Standby mode, hold the button down for 5 seconds until the Standby LED turns off.

INSTALLATION

This section provides information on:

- Operating environment
- Installation
- Connecting sensors
- Network Configuration

PARTS REQUIRED

- Screwdriver
- Computer w/Internet Connection

OPERATING ENVIRONMENT

Before you install the Sentinel be sure that your operating environment meets the physical requirements of the equipment.

Operating Temperature:	32° – 122° Fahrenheit (0° – 50° C)
Humidity:	5 – 90 %RH, non-condensing
Power:	115VAC 50/60 Hz outlet within 6'

POWER

Plug the power adapter into a 115V AC power outlet.

CELLULAR ACTIVATION

This device requires activation on the cellular network to operate. Fill-out the subscription registration form included with device and send to it Sensaphone to complete the activation process. Once it is activated power-up the device and allow a few minutes for the Sentinel to boot-up and for the modem to connect to the cellular network. Make sure the Online LED glows steadily, indicating that the device is communicating with Sensaphone.net server system. Once its online you will be able to access the device through the Sensaphone.net website.

ANTENNA INSTALLATION

Bracket Mounting - Select a suitable mounting location for the antenna on the desired surface. The orientation of the antenna should be vertical with the cable exiting downwards. When selecting a mounting location care should be taken to ensure that at least 300mm (12”) of separation is maintained between the antenna and nearby metal objects and surfaces.

When mounting the antenna to a metal housing, device enclosure or mast, care should be taken to ensure that the antenna housing is elevated above the metal surface to which it is mounted. Ensure that the selected location will enable the coaxial cable to be easily routed to the equipment. If mounting the antenna using screws it is important to check for adequate under panel clearance. It is important for RF performance that the antenna is only bracket mounted using the supplied bracket. Mounting the antenna utilizing a different bracket may adversely affect performance. The antenna can be mounted via the four 4.5mm fixing holes (suitable for M4 machine screws or 4mm self-tapping screws) or mast mounted using a jubilee or

Sentinel Installation and Setup Guide

worm drive hose clip with a maximum width of 14mm (1/2"). If you will be drilling holes to mount the antenna, the bracket can be used as a drilling template.

When ready, mount the antenna securely to the bracket using the supplied nut and washer. It is not necessary to remove the backing from the supplied adhesive pad but the pad can be utilized if a more permanent fitment to the bracket is desired. If utilizing the adhesive pad, ensure that the top surface of the bracket is clean and dry, remove the backing from the adhesive pad and stick the antenna to the bracket applying firm pressure.

Panel Mounting - Select a suitable location. The antenna must be fitted to a conductive ground plane of adequate size. It will fit panels of between 1-12mm thick (0.04-0.47"). The recommended minimum diameter of the surface is 200mm (8"). Select a mounting location taking care to ensure that there is at least 300mm (12") of clearance from proximate metal objects. Ensure that there is adequate clearance under the mounting panel and measure to check for central positioning if necessary. Mask the panel area around the hole position to protect the surface / paintwork. Drill a pilot hole, then increase the hole size to 14mm (0.55"), ensuring that the drill / cutter bit does not hit any objects under the panel. Clean the area around the hole carefully removing all swarf. Remove any paint and primer from underneath the panel surface to ensure adequate electrical contact using washer and nut. Remove the nut and washer and then the adhesive pad backing from the underside of the antenna and feed the coaxial cable through the panel. Position the antenna over the mounting hole and stick it to the panel applying firm pressure. Assemble the nut and washer from under the panel and tighten fully.

Routing The Coaxial Cable - Route the coaxial cable to the Sentinel, taking care to avoid running adjacent to existing wiring or fouling any moving controls or components.

WALL MOUNT INSTALLATION

The NEMA 4X enclosure (14" x 12" x 7.4") comes with mounting feet that must be attached to the bottom of the enclosure. The drawing below shows the location of the mounting feet for attaching the enclosure to a wall:

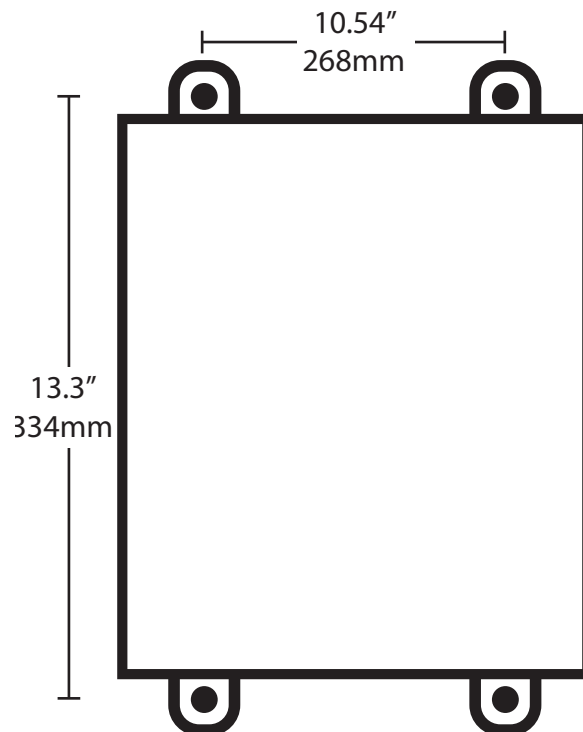


Figure 2: Sentinel mounting dimensions

TURNING THE UNIT ON

To power-up the system, plug-in the power supply and turn-on the power switch on the front of the Sentinel.

TURNING THE UNIT OFF

To power-down the system, turn-off the power switch on the front of the Sentinel, unplug the power supply, and then briefly press the OFF button on the Cellular Battery Backup Controller. This will disconnect the battery backup system and the unit will shutdown.



POWER SUPPLY

The unit comes with an external 12VDC 2A power supply that accepts 100-240VAC 50/60Hz. The power supply has been prewired to the Cellular Battery Backup Controller located inside the enclosure. This controller distributes power to the Sentinel, the cellular modem, and also controls the battery backup system for the cellular modem. Note that the Sentinel has its own internal rechargeable battery.

CELLULAR BATTERY BACKUP CONTROLLER

The Cellular Battery Backup Controller is the main power input for the system. It distributes power to the Sentinel Pro, the cellular modem, and controls the cellular battery backup system. There is no on/off switch for the controller, once power is applied it is functioning. Note that the modem also does not have a power switch so the modem will turn-on immediately as well. Only the Sentinel Pro has its own power switch.

CELLULAR BATTERY BACKUP

There is a 12V 3AH rechargeable battery located below the Sentinel Pro which is used to power the cellular modem in the event of a power failure. The entire system should operate for about 8 hours when the batteries are fully charged. The 12V battery should last for 4-5 years before needing replacement depending on usage and operating temperature.

SOLAR OPERATION

To operate the unit from a solar power system, disconnect the external power supply from the Vin terminals on the Cellular Battery Backup Controller. Next, connect the output of the solar voltage regulator to the Vin terminals. (See specifications for requirements)

CONNECTING SENSORS

The Sentinel is compatible with a wide variety of sensors including normally open/normally closed contacts, 2.8K and 10K temperature sensors, and 4–20mA current sources. Compatible sensors and accessories are shown on the Sentinel website. Sensors may be connected while the device is powered on or off. A proper size screwdriver is provided for your convenience. Contact Sensaphone or your Sensaphone reseller for assistance in selecting sensors for your monitoring requirements. A list of sensors and accessories is shown in Appendix B. Follow the instructions below to properly wire and configure the inputs for each type of electrical signal.

Warning: The inputs are designed to work with low voltage signals. DO NOT connect voltages greater than 3.3V to the inputs. DO NOT connect 120VAC to the inputs.


GENERAL WIRING CONSIDERATIONS

Most dry contact sensors can be connected to the Sentinel using inexpensive 2-conductor twisted-pair cable as small as #24 AWG. For temperature and 4–20mA sensors, use the wire chart below as a reference for selecting the appropriate wire gauge. Note that if the sensor is located far from the unit or if you are running cable in an electrically noisy environment, you should seriously consider using shielded cable. This will shield the signal from electrical interference, thereby preventing false readings and/or damage to the unit. For your convenience, Sensaphone has 22 gauge shielded cable available in 50' lengths (part number FGD-0010). To minimize electrical noise coupling between sensor wires and other wiring, follow the guidelines listed below:

- Route the power supply and network cables to the unit by a separate path than the wiring to the sensor inputs. Where paths must cross, their intersection should be perpendicular.
- Do not run sensor wiring and AC power in the same conduit.
- Segregate wiring by signal type. Bundle wiring with similar electrical characteristics together.
- If shielded cable is used, tie the shield to the input ground terminal.


<u>Wiring Distance</u>	<u>Minimum Wire Gauge</u>
700'	#24 AWG
1500'	#22 AWG
2500'	#20 AWG

The zone terminal strip has an upper and lower level for connecting up to 12 sensors. The lower level terminals are all “ground” and are electrically connected together. The upper terminal strip is the positive connection for each sensor. See illustration below.

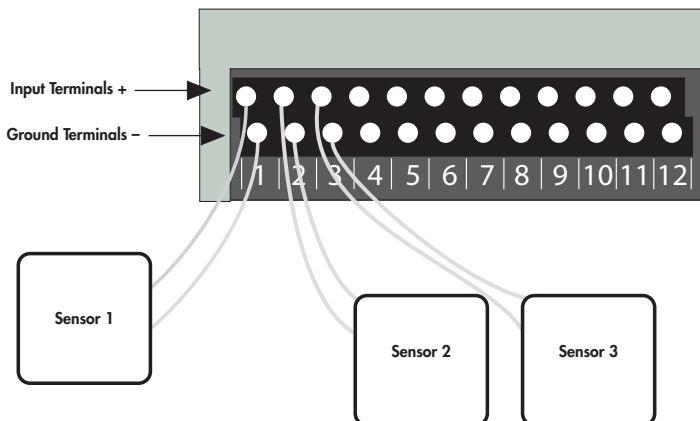

NORMALLY OPEN / NORMALLY CLOSED DRY CONTACTS


Dry contact sources consist of alarm relays or switches that are isolated and have no external voltage applied. These devices can be connected directly to the zone terminals without regard for polarity. Choose a zone and connect the wires to the corresponding screw terminals for that zone. The following figure shows how to connect a dry contact sensor:

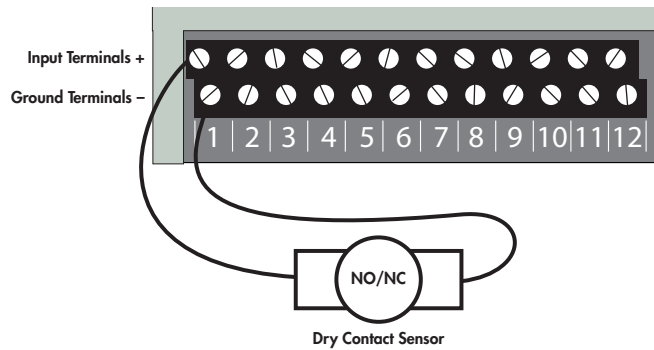

Wiring a Dry Contact Sensor

2.8K/10K TEMPERATURE SENSORS


The Sentinel is compatible with 2.8K/10K temperature sensors that match the curve data listed in the tables in Appendix D. The monitoring temperature range of the 2.8K thermistor is -109 to 115°F (-85° to 57°C) and the 10K thermistor is -87° to 168°F (-66° to 76°C). Temperature sensors can be connected directly to the zone terminals without regard for polarity. Choose an alarm input and connect the wires to the corresponding screw terminals for that zone. 2.8K and 10K temperature sensors are available from Sensaphone. See Appendix B for part numbers. The figure below shows how to connect a temperature sensor:

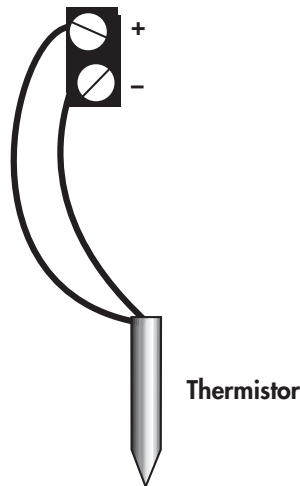

Wiring a Temperature Sensor

4–20mA CURRENT LOOP TRANSDUCERS


The inputs on the Sentinel are compatible with transducers that produce an analog output current of 4 to 20mA. Such transducers are available to measure tank and well levels, extreme temperatures, air pressure, water pressure, flow, voltage, current, rotational speed, etc. Contact our technical support department for assistance regarding your monitoring requirements (877-373-2700 or support@sensaphone.com). Follow the wiring diagrams below for connecting a 4–20mA device:

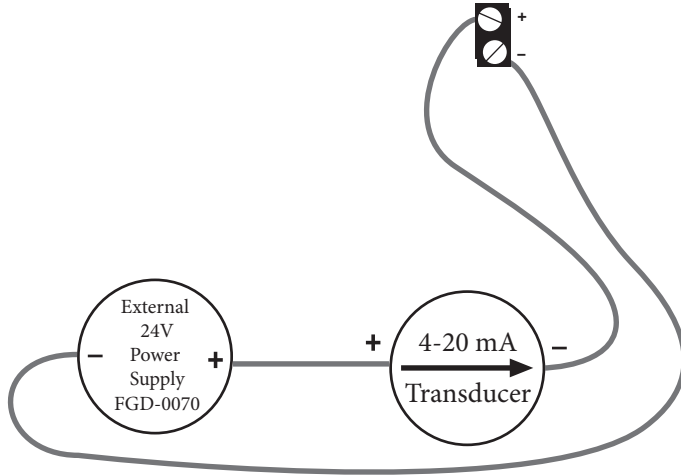

Wiring a 4–20mA device using an external 24 VDC supply.

RELAY OUTPUT WIRING

The Sentinel includes a relay output (switch) that can be used to turn on a light, siren, or other device whenever an alarm occurs. The output is a normally–open (i.e. off) dry contact that can be used for low voltage switching. The relay is rated for up to 30VAC/VDC 1 Amp. A sample wiring diagram is shown below:

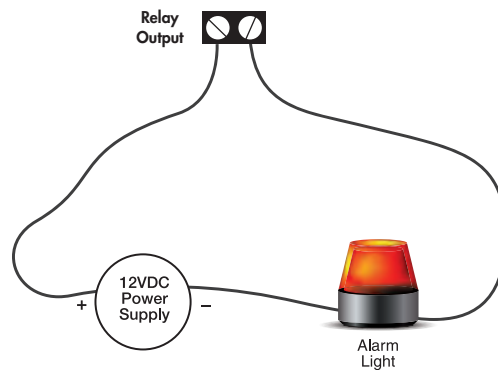

The relay can be controlled manually (via the website or App) or automatically based on specific inputs or alarms. See chapter 3 for details.

BATTERY BACKUP

The Sentinel (in the white enclosure) has an internal rechargeable battery backup pack (part #BAT-0032) which will provide up to 8 hours of backup time in the event of a power failure. The unit will charge the battery and monitor its charge level. The percent charge can be viewed on the website. The Sentinel contains circuitry to protect the battery from deep discharge damage and will disconnect the battery when all of its available energy has been expended. The battery backup module should last 4 to 5 years.



To replace the battery pack, switch the power off, then remove the four screws on either side of the enclosure. The cover contains two switches with wires attached, carefully lift the cover off and move it out of the way without disconnecting any of the wires. Disconnect the battery connector with the red & black wires by pulling it out. Next, loosen the velcro strap and remove the battery pack. Install the new battery pack and secure the Velcro strap. Insert the battery connector into the circuit board (it doesn't matter which way you insert it). Carefully replace the cover making sure all of the leds pop through the holes, then replace the four screws.

MEMORY/CLOCK BATTERY

The Sentinel (in the white enclosure) contains a CR2 lithium battery to backup certain values in SRAM memory as well as the real-time clock. This battery should last between 5-10 years depending on how much time the device is powered off.

{Note: Units manufactured prior to May 2016 contain a CR2032 lithium coin cell which has an estimated life of 2 - 5 yrs}.


RESETTING THE SENTINEL TO FACTORY DEFAULT SETTINGS

In the event that you can no longer connect to your Sentinel, you can reset the unit to factory defaults. On the back of the unit is a small hole. Beneath the hole is a push button. Insert a paper clip or similar item into the hole and push the button for 5 seconds while the device is powered on. The Sentinel will erase all of its programming and then reboot automatically. Alternatively you can also reset the device to defaults from the Sensaphone.net website. Go to the Manage Devices page, under the Admin menu. Select the device, choose Reset to Default Values from the drop down, and click Submit.


CHAPTER 2: SET UP

When your Sentinel “Online” LED is lit you can continue with the following website section.

1. Open an internet browser and go to www.sensaphone.net.
2. Fill in the form to create a new account.

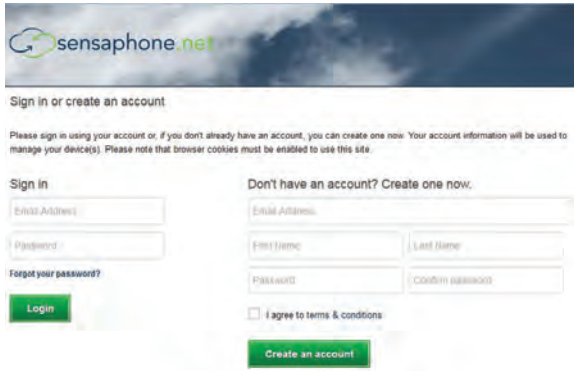


3. Once you are logged in, click *Admin*, then *Manage Devices*. In the “Add a Device” section, enter the Serial Number of your Sentinel and enter a device name. Click the *Add Device* button when finished.

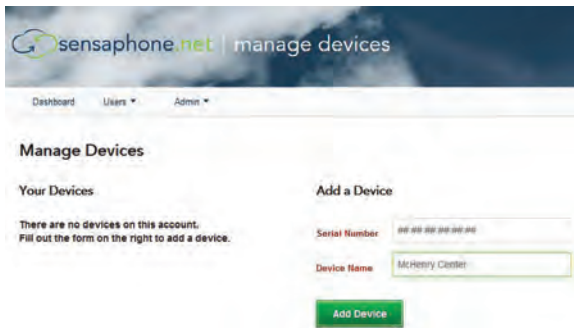

Your Sentinel is now online with the Sensaphone.net website. Read the section below to learn how to view status and program your device.

DESCRIPTION OF WEB PAGES

DASHBOARD

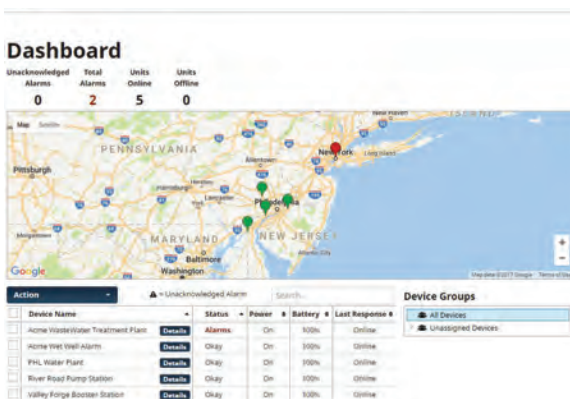

The dashboard will list all of the devices on your account. This page is automatically updated with the most current information available.

The numbers at the top will show how many Unacknowledged Alarms, Current Alarms, Units Online, and Units Offline that currently exist for all devices on your account.

The map will show the location of any device on your account that has an address or GPS location listed. You can hover over the icon to see the device name and status. If the icon for the device is green, your device status is OK. If it is red, your device has alarms. You can click on the icon to show the zones for the selected device.

The device table will display all devices on your account. Click on the *Details* button to display and configure the zones for that device. You can also use the search box above the table to search through the table, or click on the table column headers to sort the data.

Device Name – The name of the device

Status – The current status of the device (Okay, Alarms, Offline, or Standby) If the device has any unacknowledged alarms, a symbol will be displayed in this column

Power – Displays if the device is On or Off (--- will display if the device is offline)

Battery – The current percentage of the device battery (--- will display if the device is offline)

Last Response – The time that the device last connected to the server

STANDBY MODE

Standby mode puts the Sentinel in a temporary state such that no alarms will be detected, allowing onsite personnel to perform maintenance or other tasks that may have triggered an alarm otherwise. Standby mode can be entered using the Action drop down on the Dashboard page or via the pushbutton on the front of the unit. Standby mode will persist for the duration of time entered on the Device Configure screen and will automatically exit once the time expires. When using the pushbutton you must depress the button for 5 seconds. The Standby LED will light up to indicate that the device is in Standby mode. You can also exit Standby mode using the same methods.

Standby – Allows you to put the selected devices into Standby mode

Enter – Put the Sentinel in Standby mode for the length of time that is set on the Device Configure page

Enter (Untimed) – Put the Sentinel in Standby mode until you disable it

Exit – Take the device out of Standby mode

DEVICE DETAILS

The device details page displays the sensor values for your Sentinel. This page is automatically updated with the most current information available. At the top of the page are buttons to access the *Configuration*, *Alarm Delivery* and *Logs*.

Zone	Type	Value	Status
Power	Power	On	OK
Battery	Battery	100%	OK
High Pump Level	Normally Open	OK	OK
Flow Rate	4.20m/s	01.249 gpm	OK
Ambient Temperature	2.8K Thermistor P	75.4F	OK
Generator Fuel Level	4.20m/s	201.233 Gal	OK
Security Open	Normally Closed	OK	OK
Last Disarm	Normally Closed	OK	OK
Oil Pressure	4.20m/s	37.688 mph	OK
pH	4.20m/s	9.376	OK
Tp Conductance	4.20m/s	2024.979 units	OK
Salinity	4.20m/s	886.202 ppm	OK
Clarity	4.20m/s	12.000 ntu	OK
Zone 12	Normally Closed	OK	OK
Output	Relay Output	OK	OK

At the top of the page, you will see the device name, description, address and alarm status.

You will also see all of the zones for your device in the table.

Zone – The name of the zone

Value – The current value of the zone

Status – The current status of the zone

Min/Max – Displays the highest and lowest values recorded

Sentinel Installation and Setup Guide

If the device has any unacknowledged alarms, a symbol will be displayed in the status column

The Action dropdown menu provides options that allow you to interact with your device, such as acknowledging alarms, resetting pulse count, runtime and min/max values, and putting the device into standby mode.

CONFIGURE DEVICE

At the top of the dashboard, click *Configure Device* to go to the device and zone programming screens.

The box on the left will display all of your configureable zones, as well as Device (for general device settings), Power, Battery and Relay Output. As you select an option, the form on the right will change to display the appropriate data. Complete the address so that the Sentinel icon will be displayed at the appropriate location on the dashboard map. The gps coordinates will be automatically computed based on the address you enter after you click Save. If the computed coordinates are off you can override them by entering your own. To have the coordinates recompute based on the address you must delete them, then click Save again.

This page also contains settings for the *Device Offline* alarm and for *Standby Mode*. The *Device Offline* alarm will notify you if your devices stop communicating with the sensaphone.net servers for the programmed time duration. You can also receive a notification when the device comes back online by enabling the “Offline Return-To-Normal” option. You can create a custom list of people to be notified specifically for offline alarms by selecting the “Offline Alarm Delivery tab” at the top of this section and choosing Custom Alarm Delivery.

Once you have completed your programming, click on the *Save Settings* button at the bottom of the page.

The screenshot displays the configuration interface for a Sentinel device. On the left, a sidebar lists various zones and settings: Power, Battery, 1: High Sump Level, 2: Flow Rate, 3: Ambient Temperature, 4: Generator Fuel Level, 5: Security Door, 6: Leak Detector, 7: pH, 8: Dissolved Oxygen, 9: Sp Conductance, 10: Salinity, 11: Turbidity, 12: Total Flow, and Output. The main content area is titled 'Sentinel Demo' and 'Offline Alarm Delivery'. It shows device status as 'Okay' and provides fields for device information: Name (Sentinel Demo), Description (Water Treatment System), Address Line 1 (6001 W Pershing Rd), Address Line 2, City (Chicago), State/Subdivision (Illinois), Postal Code (60604), Country, GPS Coordinates (41.821498 latitude, -87.772889 longitude), and Timezone (Central Time). Below this, the 'Device Settings' section includes Standby Time (1 Hour), Offline Timeout (30 minutes), and Offline Return To Normal (Enabled). A note states: 'Note: Offline timeout will notify users when the device has stopped communicating with the cloud. More Info'. The 'IP Settings' section at the bottom has a checkbox for DMCP which is checked.

Zone Programming

Select the zone you would like to configure from the box from the left. A sample screen for a temperature sensor is shown below.

The screenshot shows a web-based configuration interface for a sensor. On the left is a vertical list of device types: Device, Power, Battery, 1: High Sump Level, 2: Flow Rate, 3: Ambient Temperature (highlighted), 4: Generator Fuel Level, 5: Security Door, 6: Leak Detector, 7: pH, 8: Dissolved Oxygen, 9: Sp Conductance, 10: Salinity, 11: Turbidity, 12: Total Flow, and Output. The main panel is titled 'Ambient Temperature' and 'Zone Alarm Delivery'. It displays the 'Current Value' as 82.7F. The 'Zone Enable' section has radio buttons for 'Enable' (selected) and 'Disable'. The 'Zone Name' is 'Ambient Temperature'. The 'Zone Type' is '7.8K Thermistor F'. The 'Calibration' is '0'. The 'Alarm Low' is '35' and the 'Alarm High' is '105'. The 'Alarm Delivery' section has radio buttons for 'Enable' (selected) and 'Disable'. Below this are 'Alarm Delivery Settings' with fields for 'Recognition Time' (0 hours, 0 minutes, 3 seconds), 'Alarm Hold Time' (0 minutes, 1 second), 'Return To Normal' (radio buttons for Enable and Disable), 'Auto Acknowledge' (radio buttons for Enable and Disable), and 'Alarm Reset' (radio buttons for Enable and Disable). At the bottom are 'Datalog Settings' with 'Mode' (radio buttons for Continuous, Write in Alarm, Disabled), 'Alarm Interval' (0 hours, 15 minutes), and 'Normal Interval' (0 hours, 30 minutes). A green 'Save Changes' button is at the bottom center.

ZONE PARAMETER DEFINITIONS

Enable/Disable: This setting determines if the Zone is being used (Enabled) or not (Disabled). Selecting Disabled will remove the gauge from the Summary screen.

Name: Enter a name for the sensor you are monitoring which describes its purpose and/or location. The name will appear on the Device Details screen as well as on alarm messages.

Type: Choose the type of sensor you are connecting to the Zone input. For temperature sensors choose either degrees F or C.

Units: The Units field is used to describe the units of measure for the value being monitored. When Temperature is selected the Units field will automatically display F (Fahrenheit) or C (Celsius). When a 4-20mA type is selected you can enter the appropriate text for the monitored condition (e.g. %RH, PSI, GPM, RPM,...). When you select Normally Open (NO) or Normally Closed (NC) you can choose from several preset descriptions for the Open and Closed state of the input. The first word always describes the Open state of the contact and the second the Closed state. If you choose Custom you can enter your own text for the Open and Closed states. To do this simply type the words into the lower Units field and separate them with a slash (/). For example, "Slow/Fast", "Safe/Danger", "Dry/Wet".

Calibration: This field can be used to offset the Zone value either positive or negative if there is some error in the reading.

Alarm Low: This is used to determine the low level at which a temperature or 4–20mA Zone has reached the alarm threshold. The value must fall below the Alarm Limit to trip an alarm.

Alarm High: This is used to determine the high level at which a temperature or 4–20mA Zone has reached the alarm threshold. The value must exceed the Alarm Limit to trip an alarm.

Table Low: The Table Low value is used to define the lower range (4mA) of your 4-20mA sensor.

Table High: The Table High value is used to define the upper range (20mA) of your 4-20mA sensor.

Alarm Delivery Enable/Disable: When Enabled, alarm messages will be delivered, if set to Disabled alarm messages will not be delivered.

Recognition Time: This is the length of time that an alarm condition must be present before a valid alarm exists and message delivery is started.

Sentinel Installation and Setup Guide

Alarm Hold Time: When an alarm occurs, the *Alarm Hold Time* will latch the alarm condition for the programmed time period, thus preventing redundant alarms from sending additional notification messages. This is useful for alarms that are likely to trip several times within a short time period, such as motion detectors.

Return to Normal Enable/Disable: This feature instructs the Sentinel to send a message when a zone input has changed from an alarm condition back to a normal condition. Anyone who received the original alarm message will also be sent the Return-to-Normal message.

Auto Acknowledge Enable/Disable: Enabling this option will automatically acknowledge an alarm when the zone goes back to normal. As a result, all remaining alarm notifications will be cancelled.

Alarm Reset Enable/Disable: This setting enables or disables the Alarm Reset Feature. The Alarm Reset feature is used to re-send alarm messages in the event that a fault condition is not corrected in a timely fashion. If an alarm continues to exist for the duration of the programmed Reset Time (see below) the alarm will reset (reactivate) and the alarm message delivery process will begin all over again. This is an optional feature.

Alarm Reset Time: This is the time allowed for an alarm's fault condition to be corrected before the Sentinel resets (reactivates) the alarm and begins the message delivery process all over again. It is recommended that this be set to no lower than 30 minutes to prevent numerous messages from being sent.

Datalogging Mode: The Sentinel has two modes of data logging for each zone: Continuous or While In Alarm. In Continuous mode the unit will log the value of the input on a fixed time interval all the time. The Normal Interval sets the logging rate while the value is within the normal range. The Alarm Interval sets the logging rate while the value is an alarm condition. By choosing the While In Alarm mode you can choose to have the unit only log values when it exceeds the alarm limits.

Alarm Datalog Interval: This is the interval that data will be logged while the input is beyond the programmed alarm limits. (Note: this is regardless of the programmed Alarm Recognition Time).

Normal Datalog Interval: This is the interval that data will be logged while the input is within the programmed alarm limits. To maximize the available memory for datalogging, set the Datalog Interval for each zone to multiples of each other. For example, Zone 1 can be set to 10 minutes, Zone 2 to 30 minutes, Zone 3 to 60 minutes, etc...

MANAGE USERS

The sensaphone.net website allows you to set up users that will be linked to your account. Each user can be configured to have their own login for website access and/or be contacted for alarms. In addition, you can choose to give alarm acknowledgement capability to each user.

There are several levels of permissions that can be assigned to each user. You can also enter contact information for alarm delivery purposes. From the main menu, select *Users*, then *Manage Users*. To add a new user, click on the *Add User* button. The example below shows a user setup as an administrator with four contact destinations.

User Details
 * Show All Users * * Required Input Field

User Enable Enable Disable

Site Access Administrator

Alarm Delivery Allow Acknowledgement

User Information
 User information is kept private and is for your use only. We will never sell or disclose this information for any purpose.

User Name * Joe McHenry

Address Line 1 300 Oak Road

Address Line 2 Address Line 2

City Los Angeles

State/Subdivision CA

Postal Code 90001

Country USA

Contact Details Add Contact User Schedule

Description	Type	Destination *	Enable	
Joe's Office	Phone	1888755-1234	Yes	Schedule Delete
Joe's Cell	Text	333-777-2222	Yes	Schedule Delete
Joe's Home	Phone	(111)888-4444	Yes	Schedule Delete
Joe's Work Email	Email	jmhenry@mycompany.com	Yes	Schedule Delete

Login Details

Email * jmhenry@mycompany.com

Password * Set Password

The following defines the various permission levels:

Administrator – Full site access, all devices on your account

Supervisor – Gives the user access to the Dashboard, device-specific pages (for example, Device Details), Manage Users, and Manage User Groups, but for only the devices you choose for them (chosen under the Device Groups section of the form). Supervisors will have the ability to create new users, but they can only give the users Supervisor access or lower.

User – Gives the user access to the Dashboard, but only shows the devices you choose for them (chosen under the Device Groups section of the form)

None – No access to the website

Alarm Delivery – Choose whether you would like the user to be able to receive alarm notifications or not.

Disabled – No alarm delivery

Inform Only – User is notified about the alarm, but cannot acknowledge it

Allow Acknowledgement – User is notified about the alarm and is able to acknowledge it

User Information

Next, enter details about this user. The user's name is the only required information.

Contact Details

The 'Contact Details' section is where you enter the telephone numbers, text numbers, and email addresses to send alarm messages. See sample programming in the figure above. To add additional contacts click "Add Contact". Be sure to add all of your possible contact methods in this section. You can choose which ones get used on the Default Alarm Delivery Schedule or Zone Alarm Delivery Schedule.

Telephone Number Programming

A '1' at the beginning of the telephone number is not required for calls to the USA, Canada, or other countries that are part of the North American Numbering Plan (NANP). See list below:

Countries in the North American Numbering Plan:

- United States
- Canada
- Caribbean Islands
 - Anguilla, Antigua & Barbuda, The Bahamas, Barbados, Bermuda, British Virgin Islands, Cayman Islands, Dominica, The Dominican Republic, Grenada, Jamaica, Montserrat, Saint Kitts and Nevis, Saint Lucia, Saint Vincent and the Grenadines, Sint Maarten, Trinidad and Tobago, Turks & Caicos
- U.S. Territories
 - American Samoa, Guam, Northern Mariana Islands, Puerto Rico, U.S. Virgin Islands*

*Technically some of these are not in North America, but since they are part of the U.S., they use the U.S. telephone system.

For all other countries you have to enter an exit code first (+ or 011), then the country code, and then the number. Do not include trunk codes which are typically displayed as (0) near the beginning of the number.

- For example, a call to the UK could be programmed as either:

+44 20 7950 4631

or

011 44 20 7950 4631

You can also create a time schedule to limit when you'll receive alarm messages. There is an overall *User Schedule* as well as individual Schedules for each contact. The default setting for all schedules is enabled, 24/7. In the sample screen below, the highlighted section shows the times when this user will be contacted for alarms:

User Schedule
◀ Back to User
User: Joe McHenry
Account Timezone: Eastern Time
Please configure the schedule during which the user's contacts are available to receive alarms.
Available:
 24/7
 Custom Time Ranges
Tips: Click and drag down to create a time range. Click an existing time range to edit it. Clear Schedule
Time Range Options
Repeat this time range on these days: Edit the start and end time:
Start: 5:00am
End: 3:00pm
Monday [x] Tuesday [x] Wednesday [x] Thursday [x] Friday [x] Saturday []
Sunday []
Okay Delete
Calendar grid showing time ranges from 5:00-6:00am on Monday through Friday.


*Note that if you configure both a User Schedule and individual Contact Schedules, there must be overlap in order for alarm messages to be delivered.

Login Details

Users will login with an email address and password. Enter this information in the *Login Details* section. In the event that a user forgets his/her password they can use the reset password feature on the main login page.

Device Access

For accounts with multiple users and/or devices, you can choose to limit a user's access to selected devices. In the *Device Access* section, choose which units this User can access. See sample screen below:

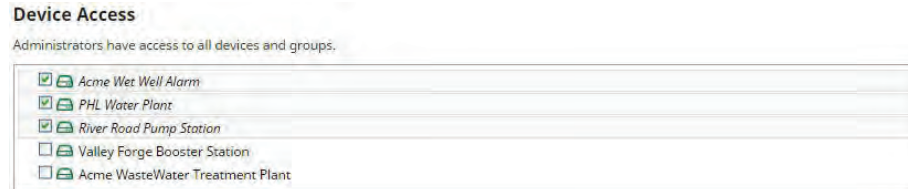

Click on 'Save Changes' once you are finished.

MANAGE USER GROUPS

Allows you to set up groups of users that can be used on other site pages.

Select the group you wish to edit from the dropdown menu, or select *Create New Group* to make a new group.

Make sure to give each group a unique, descriptive name so they can be easily referenced.

Click on the plus icon to add users to the group. A pop up modal window will show that will list all the alarm users you have added to your account from the Manage Users page (see that page description for more information).

You can select an entire user (all destinations listed under that user at the time of the alarm will be notified) or individual destinations of the user.

Click on the red X icon to remove that user from the group.

Once you are finished adding and removing users, click on the *Save Group* button at the bottom of the page.

ALARM DELIVERY

The Alarm Delivery section is where you configure the people that will be contacted when an alarm occurs. You can setup a *Default Alarm Delivery Schedule* (i.e. contact list) for each device or you can create a separate *Zone Alarm Delivery Schedule* for each individual zone. A combination of both can also be used (e.g. some zones use the default schedule and others use a custom schedule). The first step is to configure your Users and Contacts as described in the *Manage Users* section. If you haven't completed that step please do it first.

Default Alarm Delivery Schedule


To get started select a device from the Dashboard and click *Details*. Next click the *Default Alarm Delivery* button. Click the *Add Destination* button to select people from your User list. You can select all of the User contacts or just a few if desired. See sample screen below:



Sentinel Installation and Setup Guide

Continue clicking the *Add Destination* button to add additional Users to the list. If you would like to insert a delay between the first User (or group of Users) and the next User, click the *Add Tier* button and enter the delay time. Users in this Tier will not be contacted until the delay time expires. Click *Save Changes* when your schedule is complete.

*Note that the Tier Delay timer starts at the time the alarm occurs. If the alarm is acknowledged before the delay time expires then Users in the 2nd Tier (and beyond) will not receive the alarm message. See sample programming screen below:

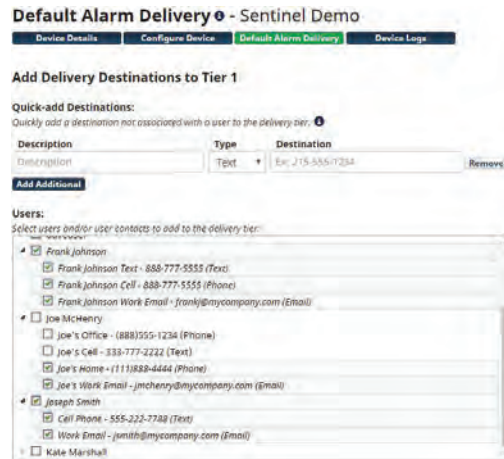

Zone Alarm Delivery Schedule

A Zone Alarm Delivery Schedule is an alarm contact list that only applies to one specific zone. You can create a separate Zone Alarm Delivery Schedule for each individual zone if required. To configure a *Zone Alarm Delivery Schedule* select a Zone from the *Device Details* page. Then click the *Zone Alarm Delivery* tab on the right. Select *Custom* to configure a contact list for the selected zone. Follow the steps as described above to complete the schedule.

Quick-Add Destinations

Quick-Add Destinations are those that can be easily entered to the notification list without creating a User Account. Note, however, that destinations added here will be inform-only (e.g. **cannot acknowledge alarms**). This entry method is useful for sending messages to people who do not require a user account in the system but may want to be informed when a particular alarm occurs.

Alarm Acknowledgment

Alarms can be acknowledged from the dashboard page by selecting a device using the checkboxes next to each device, and then clicking the "Action" drop-down at the top of the screen. You can acknowledge both Device Offline alarms or Zone alarms. Devices with 'Unacknowledged' alarms are identified with an exclamation point within a triangle. Once the alarm is acknowledged this symbol will disappear. You can acknowledge multiple alarms on multiple devices at the same time. Alarms can also be acknowledged during telephone calls by entering 555 when prompted, or by clicking the web link contained in email and text messages


LOGS

The Sentinel includes an Alarm Log and Data Log. The Alarm Log lists all alarm activity for the selected device. You can narrow down the messages by individual zones or you can select multiple zones. The Data Log contains the recorded values for each zone based on the parameters you set up on the Zone Configuration screens. You can display the values on the screen as well as graph them. There is also an option to Save the data to a file. To get to the Device Logs section, click the *Details* button from the Dashboard for the device you would like to view, then click the *Device Logs* button.

Alarm Log – Shows the history of all alarm notifications that were sent for the device

Data Log – Show the history of all logged zone values and statuses for the device

Export Data - Allows you to save selected Alarm Log or Data Log records in either CSV or pdf format. Note that CSV formatted files can be opened in Microsoft Excel.

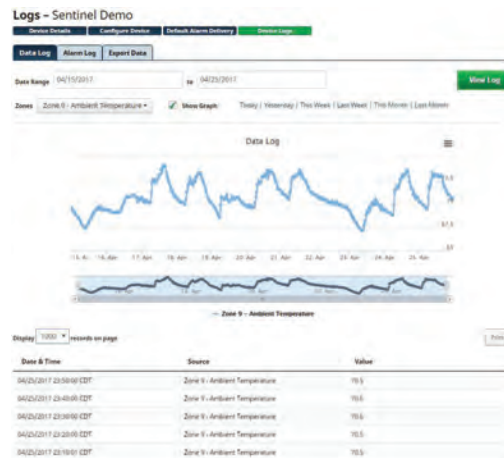

Note that for Normally Open and Normally Closed zone types, the Sentinel will record a “0” when the input is presented with an open circuit and a “1” when the input has a closed circuit. Depending on your sensor and programming, this may represent either a normal or alarm condition.

DEVICE MANAGEMENT

You can add, modify, and remove Sentinel devices from your account on the Manage Devices screen. From the main menu select Admin, then Manage Devices. Listed below are the device-related actions that can be done.

Adding Devices - To add a new device to your account, enter the device serial number (located on the bottom of the unit in the format 00:07:F9:00:00:00) and give the device a name, then click *Add Device*.

Reboot Device - To reboot your device, select it from the list to the left and then choose Reboot Device from the drop down box at the bottom of the page, then click Submit. Your Sentinel will reboot and then reconnect within a few minutes. Your Sentinelgramming will remain intact.

Remove From Account - To remove a device from your account, select it from the list to the left and then choose Remove from Account from the drop-down box at the bottom of the page. Then click *Submit*.

Reset to Default Values - To reset a device to default settings, select it from the list to the left and then choose *Reset to Default Values* from the drop-down box at the bottom of the page. Then click *Submit*. Allow several minutes for your device to complete the reset process.

Manage Devices

Your Devices

- Acme Wet Well Alarm - 00-07-F9-00-70-B1
- PHL Water Plant - 00-07-F9-00-71-88
- River Road Pump Station - 00-07-F9-00-71-80
- Valley Forge Booster Station - 00-07-F9-00-82-5D
- WasteWater Treatment Plant - 00-07-F9-00-82-F9

With Selected: Reset to Default Values

Submit

Add a Device

Serial Number

Device Name

Add Device

DEVICE GROUPS

In cases where you have many devices and many users it may be desirable to create Device Groups. These can make it easier to assign device permissions to specified Users. From the main menu select Admin, then Device Groups. In the main window, you will see a list of all your devices and any groups you may have already created. Devices are shown with a green device icon and groups are shown with a black icon. You can have multiple groups, and you can even have groups within a group. If a device icon is lined up on the left-most side of the window, they are not in a group.

To add a new group, click on the Add Group button at the top of the page. A 'New Group' icon will appear in the list. You can rename the group by right clicking on it and selecting Rename. To move a device into a group, click on the device and drag it into the group. Continue adding devices until you're finished, then click Save Groups.

The blue number shown on the group icon shows how many devices are within that group. To remove a group, right click on the group and select Delete. Any devices in that group will be moved up one level. For example, if a group that had two devices was deleted, the two devices would be shifted to the left and would no longer be in any group. You can also click and drag a device or group to reorder them. To search through your devices click on Filters. You can choose to hide any device or group that does not match your search, and you can choose to only search through your devices and not your groups. Once you are finished editing your groups, click on the Save Groups button at the bottom of the page.

ACCOUNT SETTINGS

The Account settings page is used to configure a number of options that apply across the board to your account. This page is only available to users with 'Admin' site access level. To access the account page select 'Admin' from the main menu, then 'Account'.

NAME: Give your account a 'Name' that best describes the organization managing your devices.

TIME ZONE: Set the 'Time Zone', which will serve as the default for all of your users. This will be important to ensure that any schedules you configure will operate at the appropriate times.

There are several 'Account Features' that you can configure to have the system operate in a certain manner.

REQUIRE SITE USER: When Admins and Supervisors are configuring Users, you can force the system to require that all User's receive website access by checking the 'Require Site User' box.

REQUIRE ALARM USER: Similarly, you can also require all Users to have the ability to receive alarm notifications by checking the 'Require Alarm User' box.


USER GROUPS: You can choose whether or not to allow 'User Groups' to be created within the system. Check the 'User Groups' check box to permit user groups to be used within the system.

HIDE DISABLED ALARMS: On the device details page you choose to hide the alarm status of a zone if 'Alarm Delivery' is set to disabled for the selected zone. This can be convenient when a zone is beyond the alarm limits for maintenance reasons and you don't want to display the status as 'Alarm'.

CSV Email: Enabling this setting exposes an option on the User pages to use the CSV email message format used by some state department of environmental protection agencies (such as the MASS DEP). Note that enabling this option will expose a similar setting on the User pages so that you can create a specific user with a specific email address to receive the specially formatted message.

CHAPTER 3: CONFIGURING THE RELAY OUTPUT

The Sentinel includes a relay output that can be used to control a light, siren, or other low voltage device. The output can be configured to switch either manually or automatically when a zone changes state or exceeds the alarm limits. To program the output click *Output* from the *Device Details* or *Configure Device* screen. The following configuration page will appear:

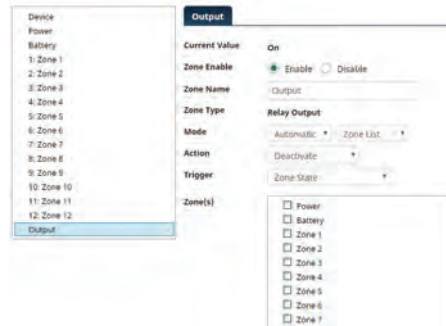

Enter a Name so that you'll know what the Output will be controlling. The Output can operate in Manual mode or Automatic mode. In manual mode you can turn the relay ON or OFF through the web page or the mobile App. To manually switch the relay output, click in the State field and select either ON or OFF, then click *Save Changes*. The change request will be sent to the Sentinel and the *Current Value* will update after the output change has successfully completed.

In Automatic mode the relay can be programmed to turn-on automatically when certain conditions are met. Listed below is a description of the parameters that apply to the automatic modes.


Input Selection - Next to the Automatic mode selection box is another drop-down that allows you to select which zones will control the output. There are four options (Zone List, Type List, All Inputs, and Limit: Zones).

Zone List: This option allows you to individually select which zones will cause the output to switch. Check the boxes next to the desired zones.

Type List: This option allows you select zones based on the zone Type. For example, you could have all of the zones configured for Temperature control the output.

All Inputs: This option selects all of the inputs (zones).

Limit: Zones: This option allows you to independently control the output based on the value of one or two zones using greater-than, less-than, or equal-to comparison statements. A separate Output-On and Output-Off instruction can be configured with its own comparison value. See sample below:

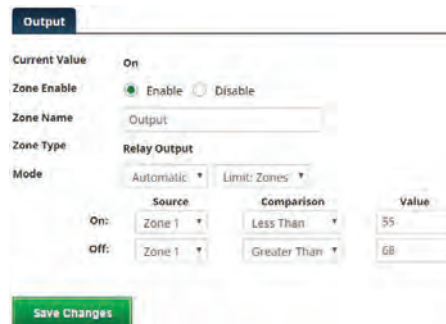

Action - This setting determines what the Output will do when the selected zone (or zones) exceeds the alarm limits. You can have the relay Activate (turn-on), Deactivate (turn-off), or Cycle (ON under normal conditions, momentarily OFF for 10 seconds when an alarm condition occurs, then back ON).

Trigger - The trigger determines what will cause the output to change state. There are 3 options to choose from which are described below:

Sentinel Installation and Setup Guide


Unacknowledged Alarms: Choosing this option will make the Output change to the setting defined by the Action for as long as an Unacknowledged Alarm persists on the selected zones. Once the alarm is acknowledged the Output will revert back to its normal position.

Alarm Condition: Choosing this option will make the Output change to the setting defined by the Action for as long as the selected input(s) remain in Alarm, regardless of acknowledgement. Once the selected zones return to their normal state the Output will revert back to its normal position.

Zone State: Choosing this option will make the output change to the setting defined by the Action as soon as the selected zones exceed the alarm limits. In other words, the alarm recognition time is not enforced, and the Output will change instantly. Once the selected zones return to their normal state the Output will revert back to its normal position.

Relay Output Wiring

The relay output can be used to turn on a light, siren, or other low voltage device. The relay is rated for up to 30VAC/VDC 1 Amp. A sample wiring diagram is shown below:

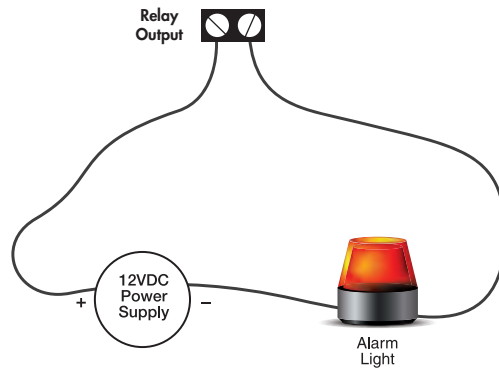

APPENDIX A: WEEKLY TESTING PROCEDURE

We recommend that you test your Sensaphone weekly to be sure it is functioning properly. This will ensure that when a problem arises the Sensaphone will be ready to alert the appropriate personnel.

There are several tests that can be performed:

- 1.) Create an alarm on each zone by tripping all connected sensors.

Temperature sensors: Heat or cool the sensor.

Motion sensors: Have someone walk in front of the sensor.

Door/window sensors: open the door/window.

Water sensors: Apply a small amount of water beneath the sensor or use a wet towel and touch it to the sensor probes.

Humidity sensors: Raise the humidity around the sensor by holding a cup of very hot water beneath the sensor.

- 2.) Allow the unit to contact all programmed users. This will make sure that the Sensaphone is programmed properly. It will also prepare personnel to respond appropriately when they receive a message from the Sensaphone.

- 3.) Test the battery (if installed) by unplugging the AC adapter and making sure that the Sensaphone continues to function. Keep the AC adapter unplugged so that a Power Failure alarm occurs. Plug in the AC adapter after the unit has finished.

- 4.) Keep a log of your tests, noting the date and whether the Sentinel passed in each category tested. An example of such a log is shown below. (See “Test Log” at the end of this manual.)

Date	Inputs		Alarm		Battery		
	Pass	Fail	Pass	Fail	Pass	Fail	
07/19/09	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Bob H
08/20/09	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Alex G.
09/19/09	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Bob H.
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

If you require assistance, call Sensaphone Technical Support at 610-558-2700.

APPENDIX B: ACCESSORIES

The sensors listed below are available from Sensaphone, and represent the most commonly used zone devices. Other dry contact sensors, designed for more specialized applications, may also be used. Commercial or industrial electrical supply houses can provide devices to monitor virtually any condition. For further information, contact Sensaphone Customer Service at 610-558-2700.

Part #	Description	Part #	Sensor/Switch
BAT-0032	Sentinel Battery	FGD-0100	2.8k Remote Temperature Sensor
FGD-0006	Magnetic Reed Switch	FGD-0101	2.8k Weatherproof Temperature Probe
FGD-0007	Passive Infra-Red Detector	FGD-0102	10k Weatherproof Temperature Probe
FGD-0010	50' two-conductor #22AWG shielded Cable	FGD-0103	10k Indoor Decorator
FGD-0013	Spot Water Detector	FGD-0104	10k Outdoor Air Weatherproof
FGD-0022	Temp° Alert	FGD-0301	Pressure Sensor
FGD-0027	Humidistat	FGD-0303	Vibration Sensor
FGD-0049	Smoke Detector with Built-in Relay		
FGD-0052	Humidity 4-20mA Transmitter		
FGD-0053	24VDC Power Supply		
FGD-0054	Power-Out Alert		
FGD-0056	Zone Water Detector w/Water Rope		
FGD-0063	Additional 10' Water Rope for FGD-0056		
FGD-0065	Carbon Monoxide Sensor		
FGD-0066	Air Quality Sensor		
FGD-0067	Surge Suppressor		
FGD-0070	Power supply with battery backup		

APPENDIX C: SPECIFICATIONS

ALERT ZONES

Number of Zones: 12

Zone Connector: terminal block

Zone Types: N.O./N.C. contact, 2.8K Thermistor (-109° to 115°F, -85° to 57°C) And 10K Thermistor (-87° to 168°F; -66° to 76°C), and 4-20mA (-80,000.0 to 80,000.0

Zone Characteristics: 28.7KΩ to 3.3V (temperature/contact) or 250 Ohms to ground (4-20mA)

A/D Converter Resolution: 12 bits ±2 LSB

Zone Protection: 5.5VDC Metal Oxide Varistor with fast acting diode clamps.

Pulse Counting: 1ms minimum duration, 1 pulse-per-second maximum rate

RELAY OUTPUT

Rated for 1A 30VAC/ 1A 30VDC Maximum

DATA LOGGING

1 minute to 24 hour sampling rate

User programmable channel selection

Zones 1 – 12

Battery

Input Power

LED INDICATORS

Power: On steady when the unit is powered on.

Alarm: Off when no alarm exists.

Ethernet Link and Activity LEDs

Online

Standby

COMMUNICATION TYPE:

4G/LTE Cellular via AT&T, Verizon, or Rogers

POWER SUPPLY

Power Supply: 120VAC/12VDC 50/60Hz 30W wall plug-in transformer w/6' cord.

Power Consumption: 15 Watts

Power Protection: Metal Oxide Varistor

BATTERY BACKUP

Rechargeable Battery: Internal 8 Hr NiMH Battery Pack (Part # BAT-0032)

Memory/Clock Battery: Internal 5-10 yr CR2 lithium (Part # BAT-0033)

Cellular Battery: 3AH SLA Battery (BAT-0005)

ENVIRONMENTAL

Operating Temperature: 32–122° F (0–50° C)

Operating Humidity: 0–90% RH non-condensing

Storage Temperature: 32°–140° F (0–60° C)

PHYSICAL

Enclosure: High impact polycarbonate, UL Type 4X (IP66)

Physical Dimensions: 14" x 12" x 7.4" (356 mm x 305 mm x 188 mm)

Weight: 14 lb. (6.35 kg)

APPENDIX D: THERMISTORS

2.8K THERMISTOR DATA

Degrees Celsius	Resistance (Ohms)
-50	187,625
-40	94,206
-30	49,549
-20	27,180
-10	15,491
0	9,142
10	5,572
20	3,498
30	2,256
40	1,491
50	1,009
60	697
70	490
80	351

10K THERMISTOR DATA

Degrees Celsius	Resistance (Ohms)
-50	441.3K
-40	239.8K
-30	135.2K
-20	78.91K
-10	47.54K
0	29.49K
10	18.79K
20	12.25K
30	8,194K
40	5,592
50	3,893
60	2,760
70	1,990
80	1,458
90	1,084
100	816.8
120	481.8
130	376.4
140	297.2
150	237.0

APPENDIX E: POST & CONNECTION ERROR CODES

When the device boots up it runs a Power On Self Test (e.g. POST). During this process the Online LED will go through a series of blink patterns. This can take a few minutes while it tests various functions and connects to the Sensaphone.net servers. If a problem occurs, the Online LED will blink a repetitive pattern of 'x' blinks followed by a 5 second pause. The table below defines the possible errors based on the number led of blinks.

Online LED Blink Codes	Failure indication	Description	Corrective Action?
OFF	Idle	Unit does not have a secure connection to the server, nor attempting to establish a secure connection	"Unit is initializing, either on power-up or rebooting. Most of the initial boot time is spent initializing memory, which can take a few minutes. * If the power LED is also OFF, the unit may have its power cable disconnected and its internal battery is depleted. * A less likely possibility is the online LED is disconnected or faulty."
flickering	Negotiating	Unit is negotiating a secure connection	The online LED flickering or blinking irregularly is normal when the unit is negotiating the secure connection. In contrast, the error code blinks steadily, then has a 5 second OFF period between error blinks.
ON	Connected	Unit has established a secure connection with the server	Secure connection with the server is established – OK!
1	Operating system initialization in progress	The unit's operating system's I/O is initializing	There is a fault in the firmware if this error code persists.
2	Real-time clock initialization failed	Internal clock not functioning	Possibly a hardware fault with the processor's internal RAM or RTC oscillator failure
3	Ethernet device initialization failed	Failed to configure ethernet chip	Probably a hardware fault.
4	Ethernet cable failed	Ethernet cable appears to be disconnected during boot	The Ethernet cable may be disconnected or otherwise faulty
5	DHCP failed	Unable to bind IP address	If using static IP, there may be an error in the IP, DNS, gateway or netmask. If using DHCP, problem may be with DHCP server.
6	Secure negotiation in progress	The unit's operating system's I/O has finished initializing, will now proceed with the secure connection negotiation	"There is a fault in program execution if this error code occurs, perhaps the memory has been corrupted. * A less likely possibility is the processor's internal RAM is faulty."
7	DNS link failed	DNS link failed	"DNS address may be incorrect, or perhaps the DNS server is down. Also check the Ethernet cable: if disconnected while securely connected to the server, reconnection attempts while the cable is disconnected will fail here."
8	IP address failed	IP address could not be resolved	If using static IP, the IP address may be incorrect
9	TCP socket failed	TCP socket to the secure server failed to connect	Port 443 may be blocked. Or perhaps the remote server is unavailable – this is the first attempt at connecting with the remote server. Will attempt to reconnect to another server.
10	SSL connect failed	SSL connection to the secure server failed to connect	Server may have SSL disabled?
11	SSL handshake failed	SSL handshake failed	If this keeps happening, the problem may be the server has changed its SSL certificate.

Appendix E: POST & Connection Error Codes

12	Server dropped the connection	The server dropped the established secure connection for some reason	Probably a glitch. Unit will reestablish the secure connection in a minute. (This is the catch-all error code for the server dropping the connection – there are many possible reasons).
13	SSL invalid MAC	The server dropped the established secure connection due to an invalid MAC	Probably a glitch, unit will reestablish the secure connection in a minute.
14	TCP read error	The server dropped the established secure connection due to a read error	Probably a glitch. Unit will reestablish the secure connection in a minute. If this keeps occurring, the server may be restarting/rebooting and may take about 8 minutes to reconnect.
15	Ethernet cable disconnected	The Ethernet cable disconnected or failed while the secure connection was established	Reconnect or replace the Ethernet cable
16	Reserved		
17	TCP write error	The unit had a problem transmitting over Ethernet	Probably a glitch. Unit will reestablish the secure connection in a minute. If this keeps occurring, there may be a problem with the real-time clock getting stuck - check if the lithium battery is below 30% (2.3V; nominal voltage is 3.0V).
18	TCP socket closed	The TCP socket between the unit and the server is unexpectedly closed.	Unit will reboot if this error occurs 6 times, which may clear the problem. Manual reboot would be the equivalent.
19	HTTP JSON parse error	The JSON message from the server is garbled or not present	Corrupt data communication. If a cellular or satellite connection, check for weak signal

APPENDIX F: RETURNING THE UNIT FOR REPAIR

In the event that the Sentinel does not function properly, we suggest that you do the following:

- 1) Record your observations regarding the Sentinel's malfunction.
- 2) Call the Technical Service Department at 610-558-2700 prior to sending the unit to Sensaphone for repair.

If the unit must be sent to Sensaphone for Servicing, please do the following:

- 1) Unplug the AC power supply from the wall outlet and disconnect all sensors from the alert zones.
- 2) Carefully pack the unit to avoid damage in transit. Use the original container (if available) or a sturdy shipping box.
- 3) You must include the following information to avoid shipping delays:
 - a) Your name, address and telephone number.
 - b) A note explaining the problem.
- 4) Ship your package to the address below:

SERVICE DEPARTMENT

SENSAPHONE

901 Tryens Road

Aston, PA 19014

- 5) Ship prepaid and insured via UPS or US Mail to ensure a traceable shipment with recourse for damage or replacement.

APPENDIX B

Health and Safety Plan

HEALTH AND SAFETY PLAN

Sub-slab Depressurization System (SSDS) Installation

Site Location:

655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site #224415

Prepared for:

Unidos ZR LLC
751 3rd Avenue
Franklyn Square, NY 11010

Prepared By:

EnviroTrac Engineering & Geology, P.C.
5 Old Dock Road
Yaphank, NY 11980

May 2026



EnviroTrac

TABLE OF CONTENTS

1.0	INTRODUCTION	3
2.0	OBJECTIVES	3
3.0	SITE CHARACTERIZATION	3
4.0	WORK DESCRIPTION	4
4.1	PERSONNEL RESPONSIBILITIES	4
4.2	Exposure Hazard Evaluation.....	5
4.3	Site / Operational Hazard Evaluation	6
5.0	SITE CONTROL	11
5.1	Site Work Zones	11
5.2	Spill Containment and Control Procedures	11
5.3	Fire Prevention.....	12
5.4	Control of Hazardous Energy and Underground Facility Identification.....	12
5.5	Emergency Notification	13
5.6	Site Communications	13
5.7	Site Security.....	13
5.8	Traffic Control and Work Zone Protection	13
5.9	Site Illumination.....	13
5.10	Noise Control	13
5.11	Assured Electrical Grounding.....	14
5.12	Lightning Safety Plan	14
5.13	General Work Rules.....	14
5.14	Health and Safety Responsibilities.....	15
5.15	Decontamination	15
6.0	PERSONNEL TRAINING	15
6.1	Personal Protective Equipment.....	16
6.2	First-Aid Supplies and Safety Equipment.....	16
6.3	Heat Stress / Cold Stress Prevention.....	17
7.0	MEDICAL SURVEILLANCE	17
8.0	CONFINED SPACE ENTRY PROCEDURES	17

LIST OF APPENDICES

APPENDIX A	SITE FIGURES
APPENDIX B	ENVIROTRAC'S GROUND DISTURBANCE PRACTICE
APPENDIX C	HASP AGREEMENT AND ACKNOWLEDGEMENT
APPENDIX D	CONTACT LIST AND INJURY / VEHICLE INCIDENT PROCEDURES
APPENDIX E	ENVIROTRAC INCIDENT REPORTING FORM
APPENDIX F	OSHA QUICK CARDS FOR HEAT / COLD STRESS
APPENDIX G	DAILY TAILGATE SAFETY MEETING LOG
APPENDIX H	SAFETY DATA SHEETS
APPENDIX I	DIRECTIONS TO NEAREST HOSPITAL

1.0 INTRODUCTION

This Health and Safety Plan (HASP) has been prepared by EnviroTrac Engineering & Geology, P.C. (ET) to address the health and safety issues during the installation of the sub-slab depressurization system (SSDS) within the building at 655-671 Stanley Avenue, Brooklyn, NY (the Site). The procedures in this HASP were developed in accordance with the Occupational Safety and Health Administration (OSHA) Hazardous Waste Operations and Emergency Response (HazWOPER) Standard 29 CFR 1910.120 to protect site workers, the public, and the environment.

2.0 OBJECTIVES

The objective of this HASP is to protect on-Site worker health and safety during field activities at each site as well as the welfare of the public and the environment. The health and safety procedures in this plan have been established based on analysis of potential hazards on the Site and the activities/tasks associated with the work in order to alleviate the risks associated with the work to be performed. These procedures have been designed to meet the following objectives:

1. Provide for the identification, recognition, evaluation, and control of health, safety, and environmental hazards;
2. Develop Site specific procedures so personnel are not exposed to avoidable risks, accidents, or injuries in the performance of their duties;
3. Establish site specific monitoring and personal protection requirements to address exposure issues from potentially hazardous substances; and
4. Identify the roles and responsibilities of on-site and support personnel for the project.

3.0 SITE CHARACTERIZATION

The site is located at 655-671 Stanley Avenue, Brooklyn, New York (Figure 1). The site consists of one (1) irregular-shaped parcel with an estimated area of 0.34 acres in size. The site is improved with one-story (1) commercial building with a full basement, and asphalt-paved parking lots in the front and rear of the building which is at basement grade. The building has an estimated gross floor area of 11,330 square feet and contains a total of three (3) commercial units ((City Fresh Market, one (1) vacant unit (former Lily's Dry Cleaner), and Tex's Chicken & Burgers)). A review of the New York City Building Department property profile overview indicated that the existing building was constructed in 1950. The building occupies most of the parcel and is bordered by landscaped areas, municipal walkways, and right-of-ways.

The site is bound to the south by Stanley Avenue, to the north by commercial and residential properties, to the east by a commercial property and Hendrix Street, and to the west by commercial properties with Van Siclen Avenue beyond.

The scope of work is outlined in the Interim Remedial Measures (IRM) Work Plan and consists of the installation of an SSDS within the Site building.

4.0 WORK DESCRIPTION

Installation of a SSDS will mitigate potential soil vapor intrusion (SVI) impacts within the Site building. A total of ten (10) vapor extraction wells will be installed in the building. The wells will be constructed of four (4) inch diameter no-hub cast iron pipe above grade, and four (4) inch diameter 20-slot schedule 40 PVC pipe below grade. The wells will be connected to a vacuum fan located on the exterior of the building and the effluent will discharge to the outdoor air, approximately two (2) feet above the roof line of the building and 10 feet from any air intake.

4.1 PERSONNEL RESPONSIBILITIES

Responsibilities of Personnel		
Position	Job Description	Interactions
Dale Konas, PE (ET) Project Manager	Responsible for technical and administrative performance of the project. Supports Site Supervisor and is available to them at all times. Will visit the Site periodically, or as necessary. Reports progress of project on a regular basis. Assigns key personnel, and identifies requests, secures, and monitors use of resources for project. Supervises all on-Site personnel and subcontractors. Coordinates daily Site-specific work efforts, and ensures all activities are in strict compliance with Site-specific health and safety plan. Has authority to suspend all work that possesses any health and safety risk. Briefs subordinate technical personnel on task requirements. Identifies and resolves technical problems. Provides periodic review of project progress.	Is responsible to manage the project for EnviroTrac.
To Be Determined (ET) Site Health & Safety Officer (SHSO)	Assures compliance with HASP. Instructs Site personnel in health and safety procedures through daily pre-work meetings. Performs any monitoring activities as required. Has authority to discontinue Site operations if safety violations exist.	Reports directly to Project Manager. Works closely with Director, Health & Safety, and Site Supervisor.
Mr. Michael Clark (ET) Director, Health & Safety (DHS)	Develops, implements, and enforces the on-Site safety project. Oversees all health and safety aspects of project, conducts periodic audits to ensure compliance. Available at all times to discuss project progress and health and safety related issues.	Reports directly to President/CEO of EnviroTrac. Works closely with Project Manager, Site Supervisor, and SHSO.

All Site personnel and contract workers will have received the appropriate level of training necessary to perform applicable duties and comply with 29 CFR 1910.120 (aka: HazWOPER). For this project, training requirements are listed in SECTION 6 – PERSONNEL TRAINING of this HASP.

This HASP will be available to all on-Site personnel, subcontractors, and visitors who access the work zone. Personnel responsible for HASP monitoring during on-Site activities will be responsible for informing the field workers, subcontractors, and visitors of any changes in conditions and/or levels of

protection required in the work zone.

4.2 Exposure Hazard Evaluation

Contaminant(s) of Concern: Chlorinated Volatile Organic Compounds (CVOCs)

Potential routes by which workers could be exposed generally include inhalation, ingestion, dermal contact, and injection. The following control measures will be used alleviate exposure by routes of entry:

Control of Potential Exposure by Route of Entry	
Route of Entry	Control of Potential Exposure
INHALATION	<p>Tasks associated with this project should not reasonably have a risk of exposure to inhalation hazards at or near published exposure limits and therefore, respiratory protection is not required during any task associated with this work.</p> <p>Dust generated from concrete during cutting, drilling, etc. is to be controlled by using wet methods while conducted any dust generating activities. If wet methods cannot be used, or if dust is not controlled using wet methods, then workers will be supplied and wear NIOSH certified N-95 (or better) filtering facepiece (aka, dust mask)</p> <p>If there is a change in scope of work or environmental conditions, the SHSO will stop work and the new conditions will be evaluated for potential inhalation hazards. Work will not proceed until the new conditions are assessed and workers health is addressed.</p>
INGESTION	<p>Tasks associated with this project have a risk of exposure to chemicals or hazardous substances that pose mild to moderate toxicity if ingested. To control exposure, the following precautions will be followed by all site workers and visitors:</p> <ul style="list-style-type: none"> • Follow good hygiene practices - wash hands, face, and exposed skin with soap and water after work and prior to eating, drinking, smoking, or applying cosmetics or lip balm, or immediately after contact with chemicals or hazardous substances. Do not touch mouth, nose, or eyes with unwashed hands or with used gloves. • Chemical-resistant gloves (e.g., nitrile, neoprene, or butyl rubber gloves) are to be worn during hands-on inspections, removing liquid or cleaning, handling chemicals or hazardous substances, or during other tasks that involve direct contact with chemicals or hazardous substances.
DERMAL CONTACT	<p>Tasks associated with this project have a risk of exposure to chemicals or hazardous substances that pose mild to moderate toxicity through dermal contact, including contact with eyes. To control exposure, the following precautions will be followed by all site workers and visitors:</p> <ul style="list-style-type: none"> • Follow good hygiene practices - wash hands, face, and exposed skin with soap and water after work and prior to eating, drinking, smoking, or applying cosmetics or lip balm, or immediately after contact with chemicals or hazardous substances. Do not touch mouth, nose, or eyes with unwashed hands or with used gloves. • Safety glasses with side shields that comply with ANSI Z87.1 requirements are to be worn at all times in the work zone. • Chemical-resistant gloves (e.g., nitrile) are to be worn during hands-on inspections, removing liquid or cleaning, handling chemicals or hazardous substances, or during other tasks that involve direct contact

	<p>with chemicals or hazardous substances.</p> <ul style="list-style-type: none"> • Safety shoes/boots that comply with ANSI Z41, ASTM F-2412, or ASTM F-2413 are to be worn when there is a danger of foot injuries due to falling or rolling objects, or objects piercing the sole. • Long pants and sleeved shirts are required to be worn at all times in the work zone.
INJECTION	<p>Tasks associated with this project have a risk of exposure to chemicals, hazardous substances, and biological hazards that pose mild to moderate toxicity through injection. Injection is the puncturing or abrasion of the skin allowing toxins to enter the body. To control exposure, the following precautions will be followed by all site workers and visitors:</p> <ul style="list-style-type: none"> • Abrasive-resistant or cut-resistant gloves (i.e., leather, Mechanix®, Kevlar-type, etc.) are to be worn while working with tools or manipulating objects that can cause cuts or abrasions to the hands. • Chemical-resistant gloves (e.g., nitrile) are to be worn during hands-on inspections, removing liquid or cleaning, handling chemicals or hazardous substances, or during other tasks that could result in direct contact with chemicals or hazardous substances. • Safety glasses with side shields that comply with ANSI Z87.1 requirements are to be worn at all times in the work zone. • Long pants and sleeved shirt are required to be worn at all times in the work zone. • Safety shoes/boots that comply with ANSI Z41, ASTM F-2412, or ASTM F-2413 are to be worn when there is a danger of foot injuries due to falling or rolling objects, or objects piercing the sole.

4.3 Site / Operational Hazard Evaluation

Precautions must be taken to prevent injuries and exposures to the following potential hazards and implement control measure to reduce any potential risks identified on the next table.

Potential Site Hazards and Risk Characterization		
Hazards	Risk Characterizations	Control Measures
SLIP/TRIP/FALL	Potential wet, or slippery conditions due to weather, on-site spills, on-site water, and drainage/runoff.	<p>Inspect/be aware of ground conditions and wet or slippery conditions.</p> <p>Use PPE to alleviate hazards, good boots, laced and tied; take small steps in slippery conditions, install handrails, or use walking devices, like hiking poles.</p> <p>Use salt, calcium chloride, sand, or other material to alleviate slippery conditions and/or to melt snow/ice.</p>

	<p>Potential slips, trips, and falls may result due to the proposed equipment and activities at the Site like drilling / excavation, well installation, system installation, loading/unloading, traffic control, etc.</p>	<p>Clear trip hazards, when possible.</p> <p>Use good housekeeping practices and maintain the work zone free of debris and have equipment, supplies, and tools organized and out of main travel paths.</p> <p>Focus on path of travel and keep solid footing. Install handrails, steps, ramps, etc. to alleviate trip or fall hazards.</p>
<p>INJURY TO BACK</p>	<p>Moving / lifting / carrying supplies, equipment, and materials around the work zone.</p> <p>Performing manual equipment operations such as shoveling, sweeping, raking, pushing (such as a wheelbarrow), hand auguring, etc.</p> <p>Removal of well covers, manway covers, or manholes.</p> <p>Lifting and maneuvering cones and barriers to establish Work Zone Protection.</p>	<p>Use proper lifting techniques: lift with legs, not back; keep load close to the body; do not twist torso, turn by moving your feet.</p> <p>Use proper bending techniques: bend at the knees, straighten back, lift, and pull using legs, and do not use back or shoulders to lift up or pull.</p> <p>Use proper manual equipment techniques for shoveling, raking, sweeping turn by moving your feet, do not twist torso, use legs not back</p> <p>take breaks as needed to alleviate muscle and joint strain.</p> <p>Get help or use mechanical lifting equipment when loads exceed 50 lbs or as needed.</p>
<p>INJURY TO FOOT/FEET</p>	<p>Injury from moving or dropping of equipment, supplies, drums, tanks, and buckets onto foot/feet.</p> <p>Feet being run over by vehicles or being crushed from lowering equipment like a tailgate lift or equipment footing.</p>	<p>Wear ANSI/ASTM compliant safety boots with steel, composite, or aluminum toes while performing any tasks on site.</p> <p>Properly secure equipment and objects. Anticipate and recognize any potential conditions which may cause the dropping of equipment (i.e., ground conditions and wet, icy, or slippery conditions).</p> <p>Ensure proper clearance when lowering outriggers on equipment.</p>

<p>INJURY TO HANDS</p>	<p>Sharps including glass, pieces of metal, wood, plastic, etc. during clean up and debris removal process.</p> <p>Potential pinch points/sharp edges during equipment handling, dropping of equipment on hands.</p> <p>Exposure to hazardous substances from the material stored in the tanks or possible contamination in soil/ground water.</p>	<p>Debris should not be handled, use shovels, dust pans, etc., to pick up debris. If debris is required to be handled, use cut-resistant gloves (e.g., Kevlar).</p> <p>Abrasive-resistant or cut-resistant gloves (e.g., leather, Kevlar, etc.) are to be worn while working with tools, equipment, or manipulating objects that can cause cuts or abrasions to the hands.</p> <p>Wear chemical-resistant gloves (e.g., nitrile, neoprene, or butyl rubber gloves) during hands-on inspections, removing liquid or cleaning, handling chemicals or hazardous substances, or during other tasks that involve direct contact with chemicals or hazardous substances.</p>
<p>INJURY TO HEAD AND EYES</p>	<p>Potential of being struck by overhead equipment such as drill rigs, or other equipment, material, and supplies around work site.</p> <p>Potential projectiles from equipment or surrounding environmental and remediation chemical spills during the proposed monitoring/sampling/injection activities.</p> <p>Potential of being sprayed or splashed in eyes or face while using liquid chemicals under pressure, such as subsurface injection of sodium permanganate.</p> <p>Potential of projectiles impacting face and eyes during preclearing of boreholes.</p>	<p>Wear a hard hat in compliance with ET's Hard Hat Policy while in the Work Zone (certified ANSI Z89.1)</p> <p>Safety glasses with side shields that comply with ANSI Z87.1 requirements are to be worn at all times in the work zone.</p> <p>Full faceshield attached to the hard hat <u>in addition</u> to safety glasses with side shields that comply with ANSI Z87.1 requirements are to be worn while using airknife for preclearing, working with liquid chemicals, or similar activities that require the protection offered by a full faceshield.</p>

<p>INJURY TO HEARING</p>	<p>Potential noise due to operating equipment during the proposed activities will not exceed the following levels at the designated durations:</p> <table border="0"> <thead> <tr> <th>Duration</th> <th>Decibel Levels. (dB) (hrs.)</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>90</td> </tr> <tr> <td>6</td> <td>92</td> </tr> <tr> <td>4</td> <td>95</td> </tr> <tr> <td>3</td> <td>97</td> </tr> <tr> <td>2</td> <td>100</td> </tr> <tr> <td>1.5</td> <td>102</td> </tr> <tr> <td>1</td> <td>105</td> </tr> <tr> <td>0.5</td> <td>110</td> </tr> <tr> <td><0.25</td> <td>115</td> </tr> </tbody> </table>	Duration	Decibel Levels. (dB) (hrs.)	8	90	6	92	4	95	3	97	2	100	1.5	102	1	105	0.5	110	<0.25	115	<p>Wear appropriate ear protection, such as:</p> <p>Ear Plugs: 3M™ E-A-R™ Push-Ins™ corded foam earplugs (NRR 28 dB)</p> <p>Earmuffs: MSA Cap Mounted Earmuff Model: 10087422 (NRR 28)</p>
Duration	Decibel Levels. (dB) (hrs.)																					
8	90																					
6	92																					
4	95																					
3	97																					
2	100																					
1.5	102																					
1	105																					
0.5	110																					
<0.25	115																					
<p>WORK IN HOT WEATHER CONDITIONS</p>	<p>Potential heat stress due to the warmer weather conditions (generally) late Spring through the Summer and into late Fall.</p> <p>Indoor and enclosed environments can produce heat stress related to activity, temperature, and lack of ventilation.</p> <p>Working in protective suites including Tyvek, Saranex, FRC, and Level A and Level B PPE. Chemical protective suites will attribute to heat stress in any weather and temperature conditions.</p>	<p>Review weather forecast prior to going to site and plan accordingly.</p> <p>Use appropriate hot weather work apparel.</p> <p>Have fluids available on-site and ensure employees are hydrated, take frequent breaks in shade or air-conditioned space, accordingly.</p> <p>Review OSHA Quick Card for: protecting Workers from Heat Stress.</p> <p>Follow requirements or EnviroTrac's Heat/Cold Stress Program.</p>																				

<p>WORK IN COLD WEATHER CONDITIONS</p>	<p>Potential cold stress due to the cooler weather conditions (generally) late Fall through the Winter and into Spring.</p> <p>NOTE: Contact with water, being wet, and wet conditions (including rain) will exacerbate cold.</p>	<p>Review weather forecast prior to going to site and plan accordingly.</p> <p>Cold conditions effect reaction time and decision making.</p> <p>Use appropriate protection from cold weather conditions including insulated gloves, neck, and head coverings, insulated socks, and layering of clothing. Take breaks in warm areas as necessary.</p> <p>Protect from water and other wet conditions that can exacerbate cold conditions. Employees are not work in wet clothing.</p> <p>Review OSHA Quick Card for: protecting workers from Cold Stress.</p> <p>Follow requirements or EnviroTrac's Heat/Cold Stress Program.</p>
<p>PRE-CLEARING BOREHOLE</p>	<p>Potential to be struck-by debris from air stream</p> <p>Body part can be injured if contacts vacuum from vacuum extractor.</p> <p>Slips, trips from hoses and equipment, fall into bore hole.</p>	<p>Use face shield attached to hardhat along with safety glasses when preclearing.</p> <p>Place a debris catcher, such as a traffic cone, over borehole while pre-clearing to alleviate the amount of debris from hole</p> <p>Use good housekeeping and keep hoses, equipment, and materials in order, mark location of bore hole and cover when not actively clearing.</p> <p>Do not let intake hose of vacuum extractor come in contact with body part. Shut off equipment when not actively</p>
<p>HAMMER DRILL USE</p>	<p>Potential injury from moving or vibrating equipment.</p> <p>Damage to hearing from excess noise generated.</p> <p>Potential injury from being struck by hammer drill.</p> <p>Possible injury or fatigue from vibration during use of hammer drill.</p>	<p>Trained and experienced employees are to operate the hammer drill. Keep hands and feet clear of moving parts. Take breaks and/or alternate operators to reduce fatigue.</p> <p>Wear hearing protection while operating hammer drill. Other people are to maintain their distance from operations to lessen noise exposure.</p> <p>Maintain good grip on tool. Ensure body parts are not in way when releasing equipment.</p> <p>Take breaks when experiencing muscle fatigue. Switch workers, if possible, to avoid fatigue.</p>

<p>EXPOSURE TO HAZARDOUS SUBSTANCES (i.e., CARBON MONOXIDE)</p>	<p>Exposure to carbon monoxide (CO) from the exhaust of fuel burning equipment in enclosed space.</p> <p>An enclosed space is any place where natural air movement is limited and may allow CO concentrations to elevate.</p>	<p>When fuel burning equipment is used in an enclosed space, the concentration of CO in air is to be continuously measured using a direct reading instrument (i.e., 5-Gas Analyzer, such as MiniRae)</p> <p>If CO levels meets or exceeds 25 PPM, work is to STOP, equipment is to be turned off, and employees are to leave the work area until CO levels decrease to below 25 PPM.</p> <p>Work is not to proceed until the area is ventilated to allow working conditions below 25 PPM CO.</p>
<p>EXPOSURE TO HAZARDOUS SUBSTANCES (i.e., SILICA DUST)</p>	<p>Operations that generate dust in silica containing materials (such as concrete, sand, mortar, brick, stone, etc.) can generate silica dust above the OSHA PEL.</p>	<p>Wet methods are to be used during any operation that has the potential silica dust from concrete, sand, mortar, brick, stone, etc.</p> <p>Wet methods include direct wetting of the operation such as drilling, sawing, etc.; or general wetting of the area using a water truck or the like.</p> <p>If wet methods cannot be used, for example due to electrical hazards, or if wet methods are not sufficient to eliminate dust, then all personnel in the area are to be supplied and wear NIOSH certified N-96 (or better) filtering facepiece (aka dust mask).</p> <p>Water is to be brought on site if not available and water not being available is not a reason to put workers in respiratory protection.</p>

5.0 SITE CONTROL

5.1 Site Work Zones

Due to the low exposure risk of the contaminants of concern, an Exclusion Zone, Contaminate Reduction Zone, or Support Zone will not be required for this project. If site conditions or scope of work changes, work will be stopped and the need to establish zones will be reevaluated.

5.2 Spill Containment and Control Procedures

The following procedures should be followed by on-site personnel in the event of a release of vehicle or equipment fluids:

1. Use proper PPE for handling potential chemical exposure including safety glasses with side

- shields, nitrile gloves, sleeved shirts, full-length pants, and safety shoes;
2. Control sensitive receptors such as storm drains, surface water, and soil;
 3. Prevent further flow of the material;
 4. Contain the discharged material;
 5. Vacuum, sweep up, or shovel the material and place into a suitable DOT disposal container for isolation for disposal;
 6. Thoroughly wash the area after a spill or leak clean-up;
 7. Provide adequate ventilation;
 8. Keep combustibles away from the spilled material;
 9. In case of large spills, follow all facility emergency response procedures.

5.3 **Fire Prevention**

To protect and prevent against accidental fire hazards, safe work practices will be followed:

1. Smoking is prohibited on site and in ET vehicles.
2. In the event of fire, 1) notify all site occupants of fire and to evacuate area, 2) gather at established primary or secondary muster point, and 3) contact emergency services.
3. At least one (1) ABC/BC rated fire extinguisher (minimum 10 lbs) will be available on site and is to be used according to manufacturer's specifications and guidelines. Only trained personnel are to use an extinguisher and only on incipient fires.
4. Follow ET's Practice for *Hot Works* procedures when using primary or secondary source ignition equipment. A PID will be used to detect flammable atmospheres. If flammable atmospheres are detected at or above 10% of the LEL, work will stop, and all sources of ignition will be contained until the source can be determined and eliminated.
5. Keep flammable liquids in closed containers and away from any possible source of ignition (electric service boxes, remediation enclosures, vehicle exhausts).
6. Keep site clean of debris.

5.4 **Control of Hazardous Energy and Underground Facility Identification**

Follow the requirements listed for the Control of Hazardous Energy, including procedures for Lockout/Tagout, in the ET Health & Safety Manual, section 27 – *Control of Hazardous Energy*.

Prior to any ground disturbance activities, both private and public utility mark outs will be conducted and

respected during activities. Soft dig techniques will be used prior to any drilling or excavation activities and follow procedures in the ET Health & Safety Manual, section 28 – *Ground Disturbance Program*.

5.5 **Emergency Notification**

In the event of a personal injury, motor vehicle accident, or other incident, the Site Safety Officer will follow ET's Personal Injury Accident Procedures and/or Motor Vehicle Accident Procedures listed in **Appendix E**. Contact and emergency numbers are also located in **Appendix D**.

Directions to the nearest Hospital and the nearest ET designated contract medical facility are located in **Appendix I**, the last appendix of the HASP. Incidents are to be reported on the ET Incident Reporting form located in **Appendix E**.

5.6 **Site Communications**

Verbal communication will be the primary means of communication. Cell phones and other communications devices will be used as necessary.

5.7 **Site Security**

The area is monitored, and non-essential personnel will not be allowed in the areas of remediation activities. All equipment, materials, and supplies left overnight will be secured to prevent slip/trip/fall hazards. Facility contacts and emergency numbers are also located in **Appendix D**.

5.8 **Traffic Control and Work Zone Protection**

Employees exposed to vehicular traffic on or near active traffic patterns will wear Class 2 high-visibility attire. Traffic at the work zone is to be controlled using proper Work Zone Protection according to the requirements of the Manual on Uniform Traffic Control Devices (MUTCD) and ET Work Zone Protection Practice. Traffic safety cones will be installed during all site activities to control and designate the work exclusion zone on the site. It is the responsibility of all on site personnel to ensure proper safety measures are implemented or adjusted during site activities for worker safety.

5.9 **Site Illumination**

Temporary lighting will be supplied if facility lighting is not sufficient or not available. Temporary lighting is to be connected through GFCI as per ET's Assured Electrical Grounding practice. Flashlights are to be used for illumination as needed. Workers are not to perform tasks in the dark or insufficient lighting.

5.10 **Noise Control**

Follow the requirements listed for the noise control and hearing protection in the ET Health & Safety Manual, section 20 – *Hearing Protection Program*.

5.11 ***Assured Electrical Grounding***

Any required electrical power connections will be equipped with Ground Fault Circuit Interrupters (GFI/GFCI) at the source of the power. Electrical cords are to be inspected prior to use and not used if the insulation has been compromised or if wires are exposed, if the cord has been kinked, or if the grounding plug is missing.

5.12 ***Lightning Safety Plan***

- Establish a location during Daily Tailgate Safety meeting where people will go in the event lightning or thunderstorms are predicted or possible;
- Use the 30/30 rule – suspend activities when "flash to bang" (lightning to thunder) is within 30 seconds, and resume work 30 minutes after the last flash or bang; and
- Follow the plan without exception.

5.13 ***General Work Rules***

To protect against the occurrence of accidents and dangerous situations, as well as to minimize the potential for emergency events, all on-site personnel shall:

1. Read and sign this HASP prior to beginning of all on-site activities. The HASP will be reviewed periodically by all personnel conducting field activities and visitors to the work zone.
2. Conduct field work only be during daylight hours unless supplemental lighting is provided.
3. Do not eat, drink, or smoke in the work zone.
4. Be knowledgeable in the use of first-aid equipment.
5. Maintain sufficient quantities of absorbent/spill collection materials to address a spill or release that may occur during work.

To minimize the possibility of injuries, the following general precautions will be taken:

1. All hand and power tools will be inspected prior to use and maintained in a safe condition.
2. Safety guards will be kept in place during use.
3. Power tools will be double-insulated, and all electric cords will be connected through GFI protective circuitry.
4. Walkways will be kept clear of equipment, supplies, excavated material, or other obstructions.
5. Proper work gloves will be provided and used, as required.
6. Hard hats are to be worn if required by the location or activity (refer to ET's Hardhat Policy).
7. Sturdy, enclosed work or safety shoes/boots are to be worn, as required by the activity.

8. Employees exposed to vehicular traffic on or near public roads will wear high-visibility attire. Traffic at the work zone is to be controlled using proper Work Zone Protection according to the requirements of the Manual on Uniform Traffic Control Devices (MUTCD).
9. Employees will observe proper lifting techniques and obey sensible lifting limits and get assistance when required.

5.14 **Health and Safety Responsibilities**

All Project Personnel are responsible to:

1. Take all reasonable precautions to prevent injury to themselves, to their fellow employees, and to the public.
2. Implement the requirements of this HASP and report any deviations from the procedures listed or the conditions described.
3. Perform only those tasks that they believe can be done safely and immediately report any accidents, unsafe conditions, or near misses according to ET's On The Job Accident Procedures and complete the required ET Incident Reporting Forms.
4. **Stop Work** whenever the risk associated with the work is not clearly understood, established, or controlled. Work will not commence until the conditions that caused the Stop Work intervention have been addressed, corrected, or resolved. Any and all workers on the site have the authority and responsibility to initiate a stop work intervention.

5.15 **Decontamination**

Follow the requirements listed for the decontamination of personnel and equipment in the ET Health & Safety Manual, section 31 – *Decontamination*.

6.0 PERSONNEL TRAINING

Field team personnel associated with activities that have a potential for exposure to hazardous substances are required to participate in a health and safety training program that complies with the OSHA standard 29 CFR 1910.120 (aka: HazWOPER) and 1910.1200 (aka: HazCom). This program instructs employees on general health and safety principles and procedures, proper operation of monitoring instruments, and use of personnel protective equipment.

In addition, field team personnel must undergo site-specific training prior to the start-up of any given project or task. As activities change at a particular work site, related training must be provided as necessary. The site-specific training will address potential hazards and associated risks, site operating procedures, emergency response and site control methods to be employed. The following training is

required to perform tasks at this site:

TRAINING REQUIREMENTS FOR SITE TASKS	
Task	Training Required
General site operations	<ul style="list-style-type: none"> • OSHA standard 29 CFR 1910.120 (aka: HazWOPER) • OSHA standard 29 CFR 1910.1200 (aka: HazCom) • First Aid/CPR (at least one (1) worker on-site must be certified in First Aid/CPR) • Requirements of ET's Health and Safety Program and this HASP • API WorkSafe certification
Operator of drilling equipment	<ul style="list-style-type: none"> • The operator of drilling equipment is required to be a Licensed Driller and have proof of license available for inspection at the worksite.
Operator of other heavy equipment	<ul style="list-style-type: none"> • Training on operations of equipment per manufacturers specifications.
Operation of power equipment including concrete saw, hammer drill, etc.	<ul style="list-style-type: none"> • Operators will be trained and/or experienced with the operation of power tool use, the hazards, controls, PPE, and use of assured electrical grounding (GFCI). Inexperienced or untrained employees are not to operate power tools.

6.1 *Personal Protective Equipment*

Based on available data, it is anticipated that all field activities will be performed at **Level D protection**. Personal protection at Level D will consist of the following based on task performed:

PERSONAL PROTECTIVE EQUIPMENT BY TASK	
Task	PPE
All Site Tasks	<ul style="list-style-type: none"> • Hard hats are to be worn, if required by the location or activity per to ET's Hardhat Policy. • Safety glasses with side shields (ANSI Z-87 + certified) or full-face safety shields are to be worn at all times while on-site. • Proper gloves will be provided and used, as required. Abrasion resistant gloves (i.e., leather, or similar) and chemical resistant, gauntlet style gloves (i.e., nitrile/neoprene/butyl rubber) will be used as tasks require. • Safety boots (ANSI Z-41, ASTM F-249, or ASTM F-2413 compliant) are to be worn, as required by the activity, laced, and tied. • High-visibility attire, i.e., Class 2, Safety Vests, are to be worn when employees are exposed to vehicular traffic. • Long pants and sleeved shirts will be worn while on site.

6.2 *First-Aid Supplies and Safety Equipment*

First-Aid supplies will be available to all personnel on site including an eyewash kit/station. All first aid supplies are to be periodically inspected for sufficient quantities and expiration date and restocked accordingly. At least one (1) ABC/BC rated fire extinguisher (minimum 10 lbs) will be available on site and

is to be used according to manufacturer's specifications and guidelines. Only trained personnel are to use an extinguisher and only on incipient fires.

6.3 ***Heat Stress / Cold Stress Prevention***

Follow the requirements listed for heat stress and/or cold stress procedures, as climate conditions require, in the ET Health & Safety Manual, section 25 – *Heat Stress / Cold Stress Policy*. OSHA Quick Cards for Heat Stress and Cold Stress are included in **Appendix F**.

7.0 MEDICAL SURVEILLANCE

A medical surveillance program will be instituted for those employees who:

1. are or may be exposed to hazardous substances or health hazards at or above the established permissible exposure limit without regard to the use of respirators, for 30 days or more a year;
2. wear a respirator for 30 days or more a year or as required by 29 CFR 1910.134 (OSHA Respiratory Protection Standard);
3. are injured, become ill, or develop signs or symptoms due to possible overexposure involving hazardous substances or health hazards from an emergency response or hazardous waste operation; or
4. are members of HAZMAT teams.

Employees will be medically evaluated and qualified prior to being fit tested for a respirator or prior to being required to enter a confined space. Records will be retained according to legal requirements.

Employees exposed to noise thresholds equal or exceeding an 8-hour time-weighted average of 85 decibels will participate in an audiometric testing program.

All medical and monitoring records will be retained according to legal requirements and available to employees upon request to the Director of Health and Safety.

8.0 CONFINED SPACE ENTRY PROCEDURES

Entry into a confined space is beyond the scope of this project. No employees are to enter a confined space to perform any task associated with this work.



If Confined Space Entry is required, a confined entry safety plan will be developed and a CSE Permit will be issued prior to allowing employees to enter a confined space.

HASP
655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site Number: 224415



APPENDIX A

Site Figures

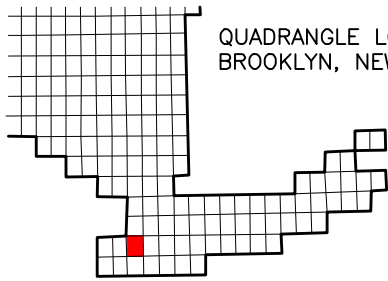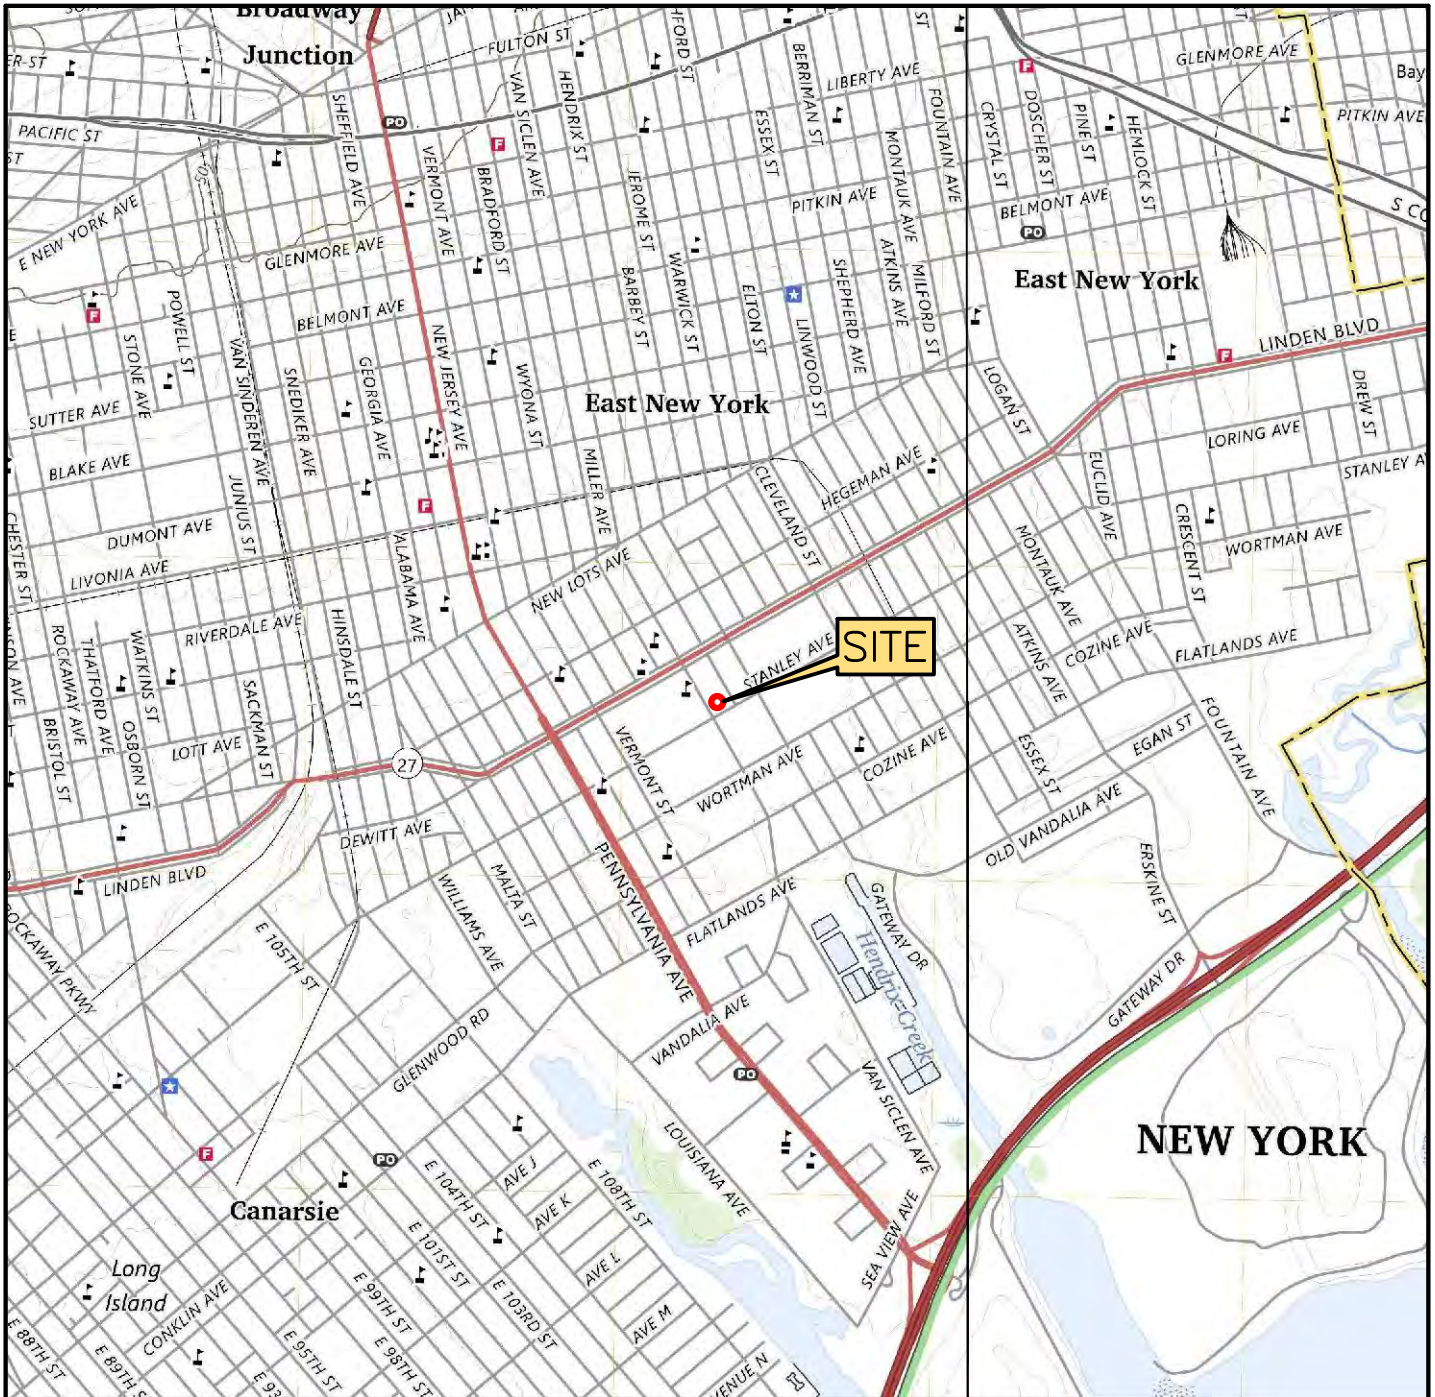


QUADRANGLE LOCATION:
BROOKLYN, NEW YORK

APPROXIMATE ELEVATION:
15 FT.

SOURCE:
USGS 7.5 MINUTE SERIES



FIGURE # 1A	SITE LOCATION MAP	DRAWN BY: B.S.	
	655-671 STANLEY AVENUE BROOKLYN, NEW YORK	REVISION DATE: 5/11/2026	

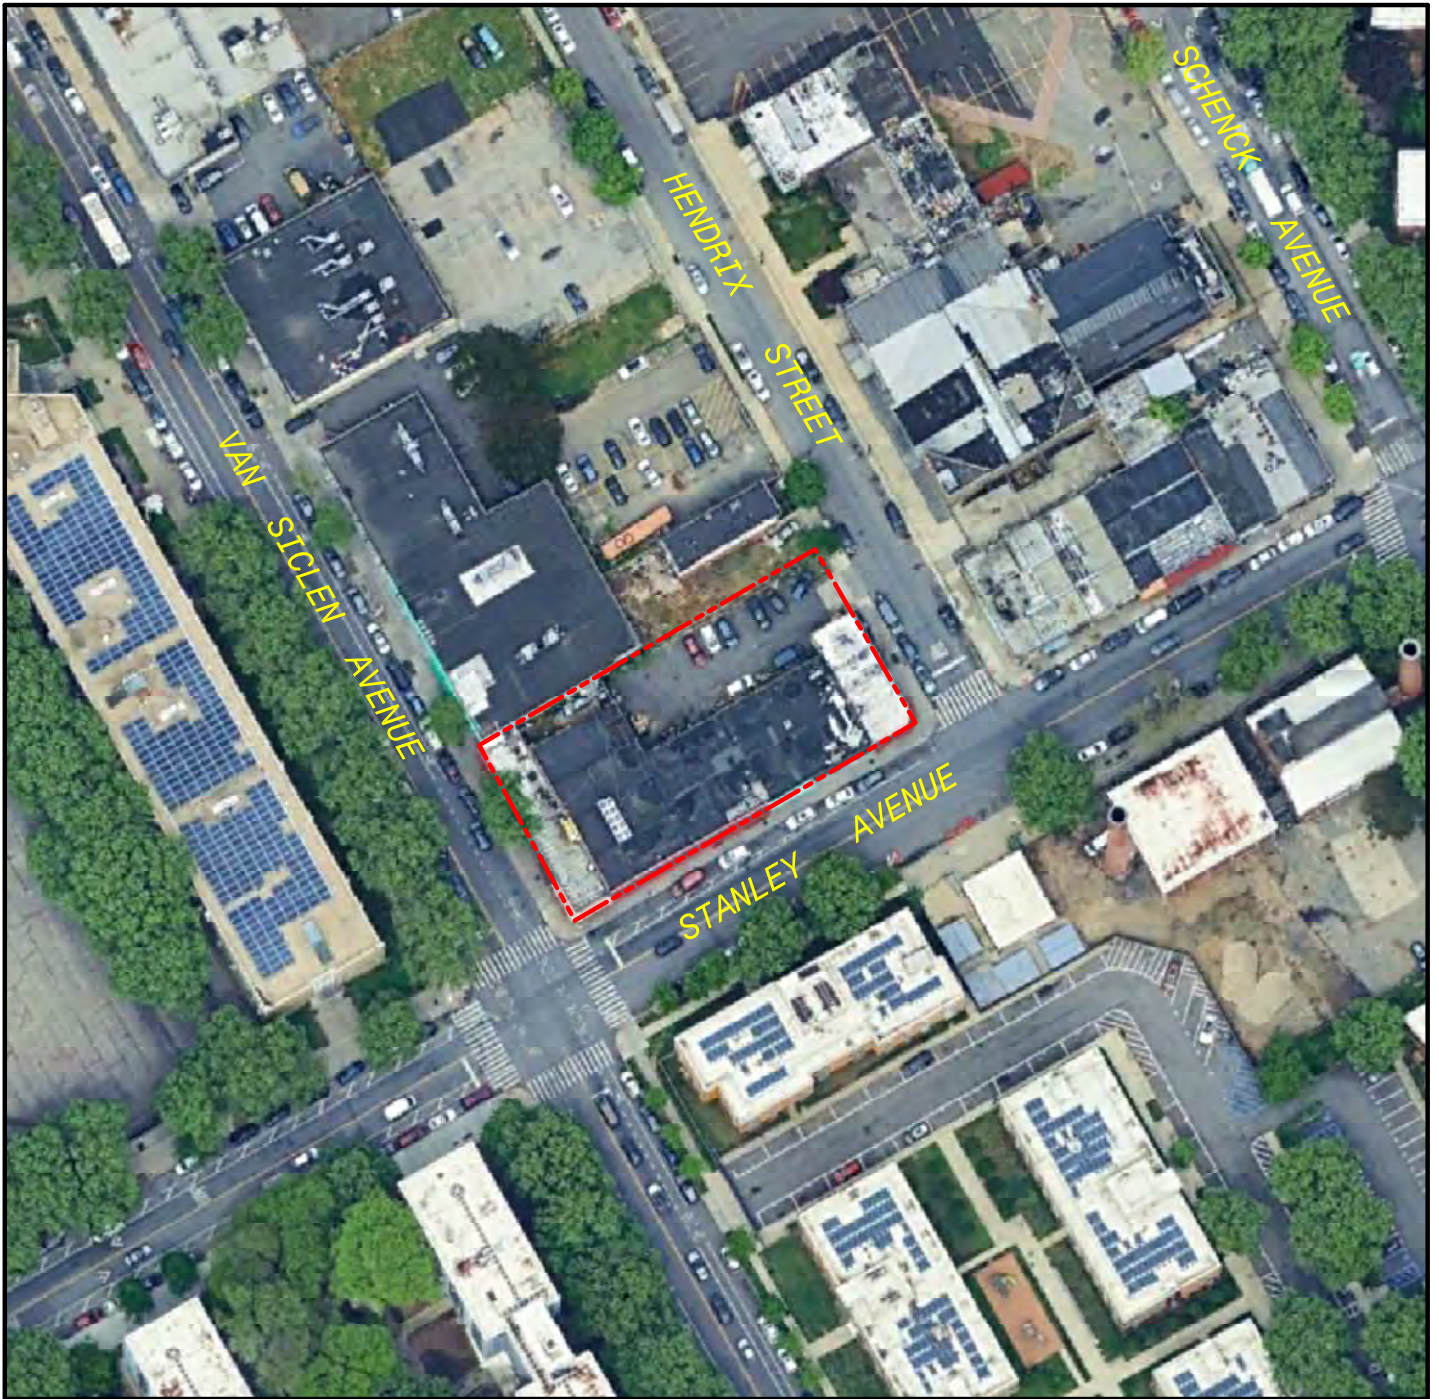

LEGEND:

--- SUBJECT PROPERTY



SCALE IN FEET

FIGURE #
1B

SURROUNDING LAND USE MAP

655-671 STANLEY AVENUE
BROOKLYN, NEW YORK

DRAWN BY: B.S.

REVISION DATE:
5/29/2026



HASP
655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site Number: 224415



APPENDIX B

EnviroTrac's Practice Ground Disturbance Program



HEALTH & SAFETY MANUAL

28 GROUND DISTURBANCE PROGRAM

28.1 Purpose

To clearly specify under what conditions the employees of EnviroTrac may conduct operations where any indentation, interruption, intrusion, excavation, construction, or other activity results in the penetration of the ground at any depth.

This document also covers the hazards, procedures, and training associated with the entering of trenches and excavations by employees of EnviroTrac, as defined under 29 CFR 1926 Subpart P. It is intended to provide the guidelines that protect employees from the hazards of entrapment and engulfment when working around trenches and excavations.

28.2 Identification of Underground Installations

It is the policy of EnviroTrac that prior to any operations that disturb more than one foot below surface grade that all underground installations are to be identified. Before any ground disturbance activities, available records will be referenced and operator personnel and/or others that may be familiar with the property will be contacted to determine the existence and location of underground installations such as facilities/tanks/pipelines and utilities in the vicinity of the work area to verify, as far as is reasonable and practicable, the existence of known underground installations.

Areas where hand tools are used for ground disturbance operations, such as shovels, hand augers, etc., will be visually assessed for possible underground installations, utilities, and/or facilities. If underground installations are identified as having hazardous energy, such as electrical power, hydraulic pressure, chemical pipe lines, etc., than procedures to control that hazardous energy will be instituted as required in Section 26 – Control of Hazardous Energy Sources (Lockout / Tagout).

Ground disturbance operations that use mechanical equipment pose a greater threat to underground installations. Prior to ground disturbance operations using mechanical equipment, local requirements for identification of underground utilities will be followed, such as notifying a “One Call Center”, “Call Before Your Dig”, etc. or engaging a third party utility mark out contractor. The Regional Safety Coordinator will maintain current underground utility identification requirements for the regional operations.

Exposing Underground Installations

All underground installations within the dig zone or a drill zone will be hand exposed or vacuum excavated (pothole) to sufficiently verify location, line size, and alignment of underground installations. Care has to be taken during the process of exposing underground installations; damage could occur if cautious work procedures are not followed. The process to expose any installations is to be selected based on site conditions/risks.

The pothole(s) will be made large enough and suitably spaced to accurately determine location, depth, orientation, and facility size. The bottom and sides of the pothole are to be adequately illuminated to determine the presence or absence of underground facilities. Visually confirm the presence or absence of underground facilities continuously during potholing. Use a commercial jacking tool or A-frame and winch to extract a hand auger if the force required to extract the tool exceeds personal lifting limits (50 pounds).



HEALTH & SAFETY MANUAL

Boreholes will be cleared to a minimum of 5 feet and 110 percent of the mechanical drilling tool diameter, or to the client's/facility's requirements, if different. If a boring is located within 2 feet of an underground facility, a protective casing will be placed in the cleared boring prior to mechanical drilling to guide the drilling tool instead of exposing the underground facility.

28.3 Overhead Utilities and other Overhead Hazards

Overhead utilities pose several hazards including electrical shock or burn, electrical arc or blast, and disruption of services provided by the overhead utilities. All work sites will be assessed for hazards associated with the overhead utilities including all means of access to and egress from the site.

In addition, other overhead and low clearance facilities and structures will be evaluated and assessed for hazards associated with the type of work being performed including all means of access to and egress from the site.

For work areas with overhead utilities, all work performed by EnviroTrac personnel or contractors will not violate the **Minimum Approach Distances** specified in the table below:

Nominal voltage in kilovolts (kV)	Distance: Phase to ground exposure
0.05 to 1.0	Avoid contact
1.1 to 15.0	2'-1" (0.64m)
15.1 to 36.0	2'-4" (0.72m)
36.1 to 46.0	2'-7" (0.77m)
46.1 to 72.5	3'-0" (0.90m)
72.6 to 121	3'-2" (0.95m)
138 to 145	3'-7" (1.09m)
161 to 169	4'-0" (1.22m)
230 to 242	5'-3" (1.59m)
345 to 362	8'-6" (2.59m)
500 to 550	11'-3" (3.42m)
764 to 800	14'-11" (4.53m)

Reference Table R-6 in 29 CFR 1910.269(l)(10)

The specific voltage of a line cannot be visually determined strictly by the placement of the line on the utility pole. Contact the local power company to determine specific voltages of power lines if the scope of work or access to or egress from the site could affect overhead utilities.

If Minimum Approach Distances cannot be maintained during the scope of the work, the lines are to be de-energized by the utility company who will need to certify, in writing, that the lines have been de-energized. To prevent damage, provisions will have to be made so de-energized lines are not contacted.

If the scope of work will bring workers or equipment near the Minimum Approach Distances, these areas will be demarcated and/or cordoned off to prevent crossing into unsafe areas. Spotters will be used if demarcation is not sufficient to prevent encroachment into these areas. The sole responsibility of the



HEALTH & SAFETY MANUAL

spotter will be to warn workers and/or equipment operators that the Minimum Approach Distances may be encroached.

Equipment and vehicles will not be parked overnight or refueled under energized power lines.

In the event of a downed utility line (power or communication), a “circle of safety” will be maintained at a minimum of a 30-foot radius from the downed line. Contact emergency services (911) to report the downed line. Communication lines can become energized when dislodged from the pole or if in contact with power lines.

Other Overhead Hazards

Communication Lines:

Communications lines (generally the lines closest to the ground) usually do not transmit hazardous voltage under normal operating conditions. These lines can cause obstructions that may dislodge loads and/or equipment if contacted. In addition, the company may incur liability for disruption of service if these lines are broken.

Guy Wire:

Guy lines are used to support utility poles and are composed of braided steel cables generally under tension. These lines are not energized under normal operating conditions but may cause damage to equipment or personal injury if contacted.

Demarcate all Guy Lines in work areas and access to or egress from the site. Spotters will be used if demarcation is not sufficient to prevent contact with Guy Lines.

Building Overhang, Canopies, Bridges, Overpasses, Signs, etc.

In addition to overhead utilities, the project is to be assessed for other overhead hazards that may interfere with the scope of work. These hazards include: canopies, building overhang, signs, bridges, overpass and other hazards. The Project Manager will assess or have the work site assessed for these overhead hazards and include provisions in the work plan to prevent contact, damage, or encroachment of safe Minimum Approach Distances.

28.4 Traffic Control in Construction Sites

Limited space in a construction site increases the potential for worker injury and property damage from vehicle accidents and collisions. To alleviate this, construction sites are to be designed to facilitate vehicle flow and to limit backing.

When vehicles are required to back, a spotter should be used to clear a path of travel. Construction vehicles are to be equipped with a backup beeper. Workers are to wear high visibility apparel (i.e., safety vests), either Class I, II, or III depending on the speed limit of the work site and adjacent traffic areas.

The swing radius of construction equipment is to be demarcated so workers are aware of the area and do not enter while equipment is operating. Workers will seek and receive acknowledgement from equipment operators prior to entering the swing radius. Equipment operators will stop operations when workers or equipment enters the swing area.



HEALTH & SAFETY MANUAL

Operations adjacent to an active traffic area will follow the requirements of EnviroTrac's Work Zone Protection program and the requirements of the USDOT Uniform Traffic Control Manual.

28.5 Environmental Drilling

Work Zone Designation

A Work Zone will be established and controlled around environmental drilling activities that allow only authorized personnel access to the zone. The driller will *Stop Work* when an unauthorized person enters the drilling zone. Follow the procedures listed in the ET Stop Work Practice. The current version of the practice is located on the Safety Portal.

Where open auger operations are used, the driller will establish additional controls such as risk-assessed procedures, signals, an area guard, or other effective means to verify that personnel are clear of the auger any time it is rotating.

Inspection of Drilling Equipment

The driller will inspect the drilling equipment on a daily basis or before each new setup by using an inspection checklist. The inspection will verify that the equipment is in good working order; pressurized hoses are in good condition, and safeguards and kill switches are in place and operational. Any substandard items will be corrected prior to drilling.

Drill Rig Operator

The drill rig operator will remain at the controls unless the rig is shut down. While the drill rig is running, the drill rig operator will not use a mobile phone or radio. The drill rig operator will not wear loose objects or clothing that could inadvertently activate the rig clutch or controls.

Performing Drilling Operations

Prior to conducting drilling operations on site, a Pre-Drilling Site Walkover will be conducted by the drilling operators and a person familiar with the site, preferably the site owner/operator.

During the site walkover, the following will be reviewed, documented, and discussed with the Workforce during the Tailgate Safety Meeting:

- Emergency provisions including the location and operation of emergency shut-offs.
- Ground conditions and topography of locations where drilling rig is to located.
- Overhead utilities and/or obstructions.
- Lay down of materials and supplies including the process to secure of drilling rods and flights, and sampling and waste barrels from falling or rolling.
- Access and egress for the site and muster points in the event of emergency.

If during the site walkover it is determined that the proposed scope of work may impact underground facilities, the project will be re-evaluated for the necessity of data collection versus the risk from impacting underground facilities. If revised or alternative locations are selected, another site walkover will be conducted.

During drilling operations, caution must be taken when drilling between the cleared depth and 20' as underground facilities may still be present. Provisions must be made to communicate during high-noise conditions including the agreement on the meaning of hand signals.

Climbing the Rig

HEALTH & SAFETY MANUAL

In the event it is necessary to climb the drilling rig for maintenance or repair, follow procedures listed below:

- If the lowest part of the worker will be higher than 6', Working At Heights provisions will be required and the provisions of the ET Working At Heights practice will be followed.
- If work on the mast is to proceed, the drill rig will be shut down and locked out before any work on the rig, including the mast can proceed.

28.6 Trenching and Excavation

This section defines the conditions under which employees may enter trenches and excavations. The Excavation Awareness Program described herein is based upon the following government regulations and industry standards:

- CFR Title 29 Part 1926 Subpart P - Excavations
- CFR Title 29 Part 1926.650- Scope, applications, definitions
- CFR Title 29 Part 1926.651- General requirements
- CFR Title 29 Part 1926.652- Requirements for protective systems

The following definitions are included in the above regulations, and are considered pertinent to this program:

- **EXCAVATION:** Any man-made cut, cavity, trench or depression in the earth surface, made by earth removal.
- **TRENCH:** A narrow excavation made below the surface of the ground. In general, the depth is greater than the width, but the width cannot exceed 15 feet.
- **BENCHING:** A method of protecting employees from cave-ins by excavating the sides of an excavation to form one or a series of horizontal steps.
- **SHIELDING:** A structure that is able to withstand the forces imposed by a cave-in and thereby protects employees within the structure.
- **SHORING:** A structure that supports the sides of an excavation and which are designed to prevent cave-ins.
- **SLOPING:** A method of protecting employees from cave-ins by excavating to form sides of an excavation that is inclined away from the bottom of the excavation so as to prevent cave-ins.
- **STABLE ROCK:** Natural solid mineral material that can be excavated with vertical sides and will remain intact while exposed.
- **COMPETENT PERSON:** Defined by OSHA as a person capable of identifying existing and predictable hazards in the surroundings, or working conditions that are unsanitary, hazardous, or dangerous to employees. Authorized to take prompt corrective measures to eliminate existing and predictable hazards and to stop work when required. A competent person should have and be able to demonstrate the following:
 1. Training, experience, and knowledge of:
 - a. Soil Analysis
 - b. Use of protective systems
 2. Ability to detect:
 - a. Conditions that could result in cave-ins
 - b. Failures in protective systems
 - c. Hazardous atmospheres



HEALTH & SAFETY MANUAL

- d. Other hazards including those associated with confined spaces

Any excavation five feet deep or deeper is not considered safe from cave-ins unless one or more of the following conditions exist:

- It is made entirely of stable rock.
- It has been inspected daily by a competent person and pronounced safe.
- Protective systems are installed which have the capacity to protect workers from cave-ins, which include: sloping, benching, shielding, and shoring that have been inspected daily by a competent person and pronounced safe.

Any excavation four feet deep or deeper that requires human occupancy will require a Competent Person to classify the soil and/or rock deposits of the excavation area as Stable Rock, Type A, Type B, or Type C in accordance with the definitions set forth in 1926 CFR Subpart P Appendix A paragraph (b). Protective systems will be selected based on the flow chart listed in 1926 CFR Subpart P, Appendix F – Selection of Protective Systems. For excavations greater than 20 feet, protective systems will be designed by a Professional Engineer. All protective systems will meet or exceed the minimum standards as specified in 1926 CFR Subpart P:

- Appendix B – Sloping and Benching,
- Appendix C – Timber Shoring for Trenches,
- Appendix D – Aluminum Hydraulic Shoring for Trenches, or
- Appendix E – Alternatives to Timber Shoring.

Atmospheric Testing of Excavation and Trenches

Any excavation, including trenches, four feet deep or deeper that requires human occupancy located in an area where hazardous atmospheres could reasonably be expected to exist, such as landfills, hazardous materials storage facilities, hazardous waste sites, and other environmental remediation areas may only be entered after the atmospheres in those excavations are tested to ascertain that the oxygen content in the excavation is greater than 19.5% and the combustible gas concentration is less than 10% of the LEL of the gas present.

Additional air monitoring is to be conducted for the presence of airborne toxins suspected based on the contamination present at the area of ground disturbance. Engineering controls will be instituted to alleviate employee exposure or, if not feasible, sufficient personal protective equipment will be worn to control worker exposure.

Access, Egress, and Crossings of Excavation or Trench

Any excavation four feet deep or deeper that requires human occupancy must have a ladder, ramp, or other safe means of egress located so that each employee need travel no more than 25 feet in any direction to reach a means of escape.

Crossings over the excavation or walkways within six (6) feet of the excavation are to be designed with handrails that meet OSHA requirements for fall protection.

Water Accumulation in Excavation or Trench

In the event water accumulates in the excavation, the following requirements for controlling this

HEALTH & SAFETY MANUAL

accumulation must be provided if personnel are to enter or work in the excavation:

- Personnel must not work in excavations where standing water has accumulated,
- Water removal or de-watering equipment, such as pumps, are installed and monitored by a competent person,
- Personnel must exit from excavations during rainstorms,
- Trenches must be carefully inspected by a competent person after each rain and before personnel are permitted to re-enter.

Suspended Loads

Workers in the excavation and other areas of the worksite are to be protected against falling loads and are not allowed to be under or in the swing radius of any equipment working with a load.

Authority and Administration

Within EnviroTrac, the Director of Health and Safety, and the designated Regional Health and Safety Coordinators will be responsible for the generation and execution of all portions of the program, and will have the necessary authority to assure that all requirements of this program are properly fulfilled, will administer this program.

28.7 Excavation Entering Procedure

It will be the policy of EnviroTrac not to allow any of its employees to enter excavations for any reason unless that excavation meets the conditions for being safe from cave-in, has been tested to assure that the atmosphere is safe, and has a proper means of ingress/egress as outlined above.

When EnviroTrac is employed as the prime/sole contractor at a facility where excavations are or will be present, the EnviroTrac designated Competent Person will have the responsibility to ascertain that all excavations meet the requirements of the above regulations prior to any employee or contractor entering into such excavations. The Competent Person will perform daily inspections of the excavations or immediately after a rain event using the Trench Inspection and Entry Authorization form located at the end of the this practice.

When EnviroTrac is employed as a sub-contractor at a facility where the client has the responsibility for determining the hazards at the site or location associated with excavations, and consequently controls the compliance to the pertinent excavation regulations, EnviroTrac employees will enter such excavations only if the excavations has been inspected and cleared by the Competent Person and the employee is satisfied that the excavations are safe and meet the conditions for being safe from cave-in.

Should contractors, clients or others request an employee to enter an excavation that the employee does not feel is safe and free from cave-in hazards, the employee is to state that he/she does not consider the excavation safe, inform his/her supervisor and/or the Project Manager, and await further instructions.

28.8 Alternatives to Excavation Entry

Sampling in excavations should always be performed utilizing construction equipment such as backhoes or long handled samplers wherever possible. Entering excavations should always be the last

HEALTH & SAFETY MANUAL

alternative, and must never be undertaken without first ensuring that the excavation is safe from cave-in.

28.9 Employee Training

All employees who are required to enter excavations for any reason will successfully complete an Excavation Awareness Training Program, which will include, but not be limited to the following topics,:

- The contents of 29 CER 1926 Subpart P
- The contents of this EXCAVATION AWARENESS PROGRAM.
- The dangers of excavation entry.
- Alternatives to entering excavations for sampling.

EnviroTrac employees must be made aware of the danger of sidewall collapse for persons standing near the excavation during training. The awareness training will include Control of Hazardous Energy (Lockout/Tagout) for operations that require ground disturbance and include local and pertinent requirements for underground utility identification and mark out.

Documentation of training will be maintained by the EnviroTrac's Safety Department and will include the employee's name; date(s) of training; subject, curriculum, handouts, and pertinent training materials; and trainer's name and title.

The Regional Health and Safety Coordinator will conduct periodic inspection of random work sites to ascertain that this Excavation Awareness Program is conscientiously being followed.

28.10 Program Evaluation

The Corporate Health and Safety staff will review all aspects of this Excavation Awareness Program at least annually to assure its effectiveness. Whenever modifications in work scope, equipment changes or modification, revision of federal regulations or standards, or any action that would necessitate a change in any of the contents of this Excavation Awareness Program occur, such changes will be made, and everyone affected by those changes notified and retrained, if necessary. All such modifications will be made in writing, and the nature of the modification noted and dated.

28.11 Enforcement

The following disciplinary actions will be administered to employees found to be willfully negligent or not complying with the provisions of this policy:

- First Offense: If the violation is correctable, the employee will receive a written warning detailing the nature of the offense, which will be documented in the employee's personnel file. In addition, if the violation is not correctable, the employee will be dismissed from the site and sent home for the day without pay.
- Second Offense: The employee will receive a written warning detailing the nature of the offense, documented to their personnel file, and one day off without pay, regardless of whether the violation is correctable.
- Third Offense: The employee will receive a written warning detailing the nature of the offense, documented to their personnel file, and one week off without pay, regardless of whether the violation is correctable.



HEALTH & SAFETY MANUAL

- Fourth Offense: The employee will be terminated with cause.

Should willful noncompliance or negligence to the provisions of this policy result in injury or increased risk to another individual then disciplinary action will be more severe than the normal sequence of the above procedures may be administered. All of the above disciplinary steps will be administered within the scope and intent of written company personnel policies.

HEALTH & SAFETY MANUAL

TRENCH INSPECTION AND ENTRY AUTHORIZATION FORM					
LOCATION:				DATE:	
TIME OF INSPECTION(S)					
WEATHER CONDITIONS:				APPROX. TEMP.:	
CREW LEADER:			SUPERVISOR:		
DIMENSIONS:		DEPTH =		Yes No HAZARDOUS CONDITIONS	
		TOP =	W	L	<input type="checkbox"/> <input type="checkbox"/> Saturated soil / standing or seeping water
		BOTTOM =	W	L	<input type="checkbox"/> <input type="checkbox"/> Cracked or fissured wall(s)
SOIL TYPE:		TESTED:		<input type="checkbox"/> <input type="checkbox"/> Bulging wall(s)	
<input type="checkbox"/> Solid rock (most stable)		<input type="checkbox"/> Yes		<input type="checkbox"/> <input type="checkbox"/> Floor heaving	
<input type="checkbox"/> Average soil		<input type="checkbox"/> No		<input type="checkbox"/> <input type="checkbox"/> Frozen soil	
<input type="checkbox"/> Fill material				<input type="checkbox"/> <input type="checkbox"/> Super-imposed loads	
<input type="checkbox"/> Loose sand				<input type="checkbox"/> <input type="checkbox"/> Vibration	
				<input type="checkbox"/> <input type="checkbox"/> Depth greater than 10'	
PROTECTION METHODS:			PLACEMENT OF SPOILS & EQUIPMENT		
<i>(Walls MUST be vertical—NO voids)</i>			<input type="checkbox"/> <input type="checkbox"/> Spoils at least 2 feet from edge of trench		
SHORING			<input type="checkbox"/> <input type="checkbox"/> Equipment at least 2 feet from edge		
<input type="checkbox"/> Timber			<input type="checkbox"/> <input type="checkbox"/> Backhoe at end of trench		
<input type="checkbox"/> Pneumatic			<input type="checkbox"/> <input type="checkbox"/> Compressor, etc. at remote location		
<input type="checkbox"/> Hydraulic			LADDER LOCATION		
<input type="checkbox"/> Screw Jacks			<input type="checkbox"/> <input type="checkbox"/> Located in protected area		
<input type="checkbox"/> Trench Shield			<input type="checkbox"/> <input type="checkbox"/> Within 25 feet of safe travel		
UNEVEN, IRREGULAR WALLS			<input type="checkbox"/> <input type="checkbox"/> Secured		
<input type="checkbox"/> Trench Box			<input type="checkbox"/> <input type="checkbox"/> Extends 36 inches above the landing		
Sloping: <input type="checkbox"/> q 1:1 (45°) <input type="checkbox"/> q 1 1/2:1 (34°)			<input type="checkbox"/> <input type="checkbox"/> Leads to safe landing		
Yes No ENVIRONMENTAL CONDITIONS:			OTHER:		
<input type="checkbox"/> <input type="checkbox"/> Gas detector used?			<input type="checkbox"/> <input type="checkbox"/> Shoring equip. & mats inspected prior to use?		
<input type="checkbox"/> <input type="checkbox"/> Confined space permit issued?			<input type="checkbox"/> <input type="checkbox"/> Is trench SAFE to enter?		
COMMENTS:					
				Work Order #	
N O T E	All unsafe conditions must be corrected prior to trench entry. If any hazardous conditions are observed, the trench must be immediately evacuated and no one is allowed to re-enter until corrective action has been taken.				
	Certification by Competent Person Excavation Entry Authorized By: _____ Designated Competent Person				

HASP
655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site Number: 224415



APPENDIX C

HASP AGREEMENT AND ACKNOWLEDGEMENT

APPENDIX D

CONTACT LIST AND INJURY / VEHICLE INCIDENT PROCEDURES

Contact and emergency phone numbers for this project:

NYC Health + Hospitals, Woodhull _____ 718-963-8000

(760 Broadway, Brooklyn, NY 11206)

All Emergencies call _____ 911
National Response Center _____ 800-424-8802
National Poison Control _____ 800-926-953

ET CONTACTS

Ms. Dale Konas (ET-Project Manager) _____ Office: 631-924-3001

Cell 516-807-7978
Ms. Dale Konas (ET-Site Supervisor) _____ Cell 516-807-7978
Mr. Michael Clark (ET-Director of Health and Safety) _____ Office: 609-387-5553

Cell: 516-790-0998

CLIENT CONTACT

Mr. Zoranller Estevez (Property Owner) _____ Office: 718-219-4720

HASP
655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site Number: 224415



APPENDIX E

INCIDENT REPORTING

- Personal Injury Accident Procedures
- Motor Vehicle Accident Procedures

HASP
655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site Number: 224415



APPENDIX F

ENVIROTRAC'S INCIDENT REPORTING FORM

INCIDENT AND NEAR MISS REPORTING FORM

1. Name of person(s) involved:		2. Title of person(s) involved:	
3. Type: Personal Injury Motor Vehicle Accident Property Damage Stop Work Intervention Near Miss			
4. Date & Time of Incident: Date: _____ Time: _____ <small>(indicate AM or PM)</small>		5. Location (physical location and street address)	
6. Client:			
7. Name of person completing form:		8. Title of person completing form:	
9. ET reg office:	10. Contact phone number(s):	11. Witness name(s) & phone numbers:	
12. Full Description of Incident: (if incident involves vehicle, provide identification information) (Describe in detail: weather during the incident, physical attributes of the location, what was happening prior to the incident including procedures being followed, the actual incident, failure of equipment, results of the incident, description of vehicle or property involved, etc. Use additional sheets if necessary.)			

LOCALLY SAVED AND PAPER COPIES OF THIS DOCUMENT ARE UNCONTROLLED.

INCIDENT AND NEAR MISS REPORTING FORM


1. Name of person(s) involved:	2. Title of person(s) involved:
3. Type: Personal Injury Motor Vehicle Accident Property Damage Stop Work Intervention Near Miss	
4. Date & Time of Incident: Date: _____ Time: _____ (indicate AM or PM)	5. Location (physical location and street address)
6. Client:	
13. List Personal Protective Equipment (PPE) used during the incident, if applicable:	
14. Corrective Actions: (What should be done to prevent recurrence of this incident, i.e., employee training, modify procedures, different equipment, etc.?)	
15. Miscellaneous information: (Provide any other information or recommendations which you feel are pertinent to this incident. Use this section to list any Police or government agency information, report numbers, contact information, etc.)	

LOCALLY SAVED AND PAPER COPIES OF THIS DOCUMENT ARE UNCONTROLLED.



INCIDENT AND NEAR MISS REPORTING FORM

1. Name of person(s) involved:	2. Title of person(s) involved:
3. Type: Personal Injury Motor Vehicle Accident Property Damage Stop Work Intervention Near Miss	
4. Date & Time of Incident: Date: _____ Time: _____ (indicate AM or PM)	5. Location (physical location and street address)
6. Client:	

**MOTOR VEHICLE INCIDENT DIAGRAM
(MUST BE COMPLETED FOR ALL MOTOR VEHICLE ACCIDENTS)**

 Indicate North by Arrow	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Draw a diagram of the roadway or streets where crash occurred, indicating vehicles involved and direction of travel. Use the follow symbols:</p> <p> 1 = Vehicle 1 (your vehicle) 2 = Vehicle 2, Vehicle 3, etc... ○ = pedestrian, animal, non-driver → = Direction of travel </p> </div> <div style="border: 1px solid black; height: 200px; width: 100%;"></div>
--------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Indicate damage to vehicle(s):

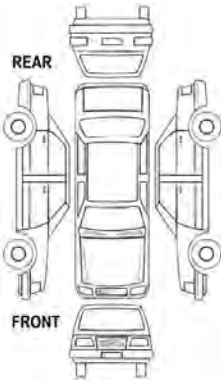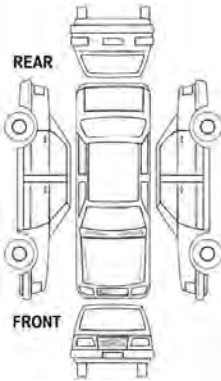	Your Vehicle		Other Vehicle
	<hr/> <hr/> <hr/> <hr/> <hr/> <hr/> <hr/> <hr/>		<hr/> <hr/> <hr/> <hr/> <hr/> <hr/> <hr/> <hr/>

LOCALLY SAVED AND PAPER COPIES OF THIS DOCUMENT ARE UNCONTROLLED.

Verify against controlled document for latest revision:
Control version located in H&S Documents section of EnviroTrac intranet, file name:

Revision Date of this document: 2/4/2014
ET INCIDENT REPORTING FORM w/date
Page 3 of 4

INCIDENT AND NEAR MISS REPORTING FORM

1. Name of person(s) involved:	2. Title of person(s) involved:
3. Type: Personal Injury Motor Vehicle Accident Property Damage Stop Work Intervention Near Miss	
4. Date & Time of Incident: Date: _____ Time: _____ (indicate AM or PM)	5. Location (physical location and street address)
6. Client:	

MOTOR VEHICLE INCIDENT INFORMATION

Company Vehicle (vehicle 1):

Make / Model: _____

EnviroTrac Vehicle No.: _____

Other Vehicle (vehicle 2):

Make / Model /Yr _____

License Plate No: _____

Driver's Name: _____

Address: _____

Phone No: _____

Driver's License No. & ST: _____

Insurance Co / Policy No: _____

Other Vehicle (vehicle 3):

Make / Model /Yr _____

License Plate No: _____

Driver's Name: _____

Address: _____

Phone No: _____

Driver's License No. & ST: _____

Insurance Co / Policy No: _____

Include any other pertinent information:

(witness name & contact no., injured parties including medical treatment provided and where taken, Police Officer name and badge no., any else to assist in the investigation/claim)

LOCALLY SAVED AND PAPER COPIES OF THIS DOCUMENT ARE UNCONTROLLED.

HASP
655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site Number: 224415



APPENDIX G

OSHA QUICK CARDS FOR: HEAT STRESS COLD STRESS



Protecting Workers from Heat Stress

Heat Illness

Exposure to heat can cause illness and death. The most serious heat illness is heat stroke. Other heat illnesses, such as heat exhaustion, heat cramps and heat rash, should also be avoided.

There are precautions your employer should take any time temperatures are high and the job involves physical work.

Risk Factors for Heat Illness

- High temperature and humidity, direct sun exposure, no breeze or wind
- Low liquid intake
- Heavy physical labor
- Waterproof clothing
- No recent exposure to hot workplaces

Symptoms of Heat Exhaustion

- Headache, dizziness, or fainting
- Weakness and wet skin
- Irritability or confusion
- Thirst, nausea, or vomiting

Symptoms of Heat Stroke

- May be confused, unable to think clearly, pass out, collapse, or have seizures (fits)
- May stop sweating

To Prevent Heat Illness, Your Employer Should

- Provide training about the hazards leading to heat stress and how to prevent them.
- Provide a lot of cool water to workers close to the work area. At least one pint of water per hour is needed.



For more information:

 **Occupational
Safety and Health
Administration**
U.S. Department of Labor
www.osha.gov (800) 321-OSHA (6742)

OSHA 3164-09-11R

OSHA[®] QUICK CARD[™]

- Schedule frequent rest periods with water breaks in shaded or air-conditioned areas.
- Routinely check workers who are at risk of heat stress due to protective clothing and high temperature.
- Consider protective clothing that provides cooling.



How You Can Protect Yourself and Others

- Know signs/symptoms of heat illnesses; monitor yourself; use a buddy system.
- Block out direct sun and other heat sources.
- Drink plenty of fluids. Drink often and BEFORE you are thirsty. Drink water every 15 minutes.
- Avoid beverages containing alcohol or caffeine.
- Wear lightweight, light colored, loose-fitting clothes.



What to Do When a Worker is Ill from the Heat

- Call a supervisor for help. If the supervisor is not available, call 911.
- Have someone stay with the worker until help arrives.
- Move the worker to a cooler/shaded area.
- Remove outer clothing.
- Fan and mist the worker with water; apply ice (ice bags or ice towels).
- Provide cool drinking water, if able to drink.

IF THE WORKER IS NOT ALERT or seems confused, this may be a heat stroke. CALL 911 IMMEDIATELY and apply ice as soon as possible.

If you have any questions or concerns, call OSHA at 1-800-321-OSHA (6742).

For more information:

OSHA[®] Occupational
Safety and Health
Administration
U.S. Department of Labor
www.osha.gov (800) 321-OSHA (6742)


THE COLD STRESS EQUATION



**LOW TEMPERATURE + WIND SPEED + WETNESS
 = INJURIES & ILLNESS**

When the body is unable to warm itself, serious cold-related illnesses and injuries may occur, and permanent tissue damage and death may result.

Hypothermia can occur when *land temperatures* are **above** freezing or *water temperatures* are below 98.6°F/ 37°C. Cold-related illnesses can slowly overcome a person who has been chilled by low temperatures, brisk winds, or wet clothing.

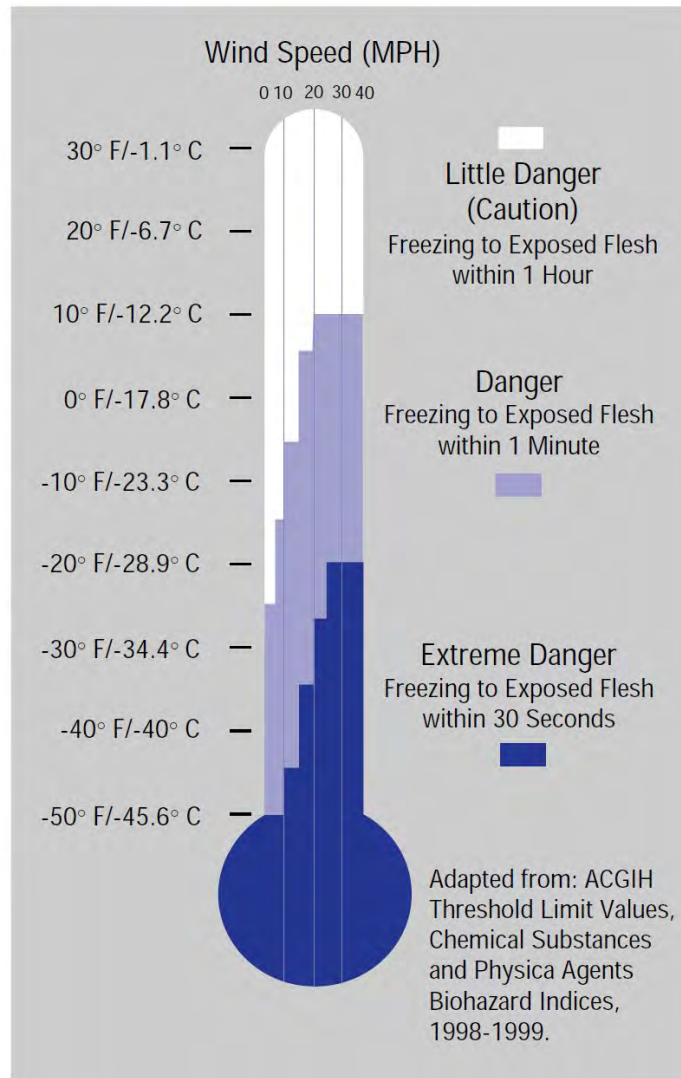

U.S. Department of Labor
 Occupational Safety and Health Administration

OSHA 3156
 1998

FROST BITE

What Happens to the Body:

FREEZING IN DEEP LAYERS OF SKIN AND TISSUE; PALE, WAXY-WHITE SKIN COLOR; SKIN BECOMES HARD and NUMB; USUALLY AFFECTS THE FINGERS, HANDS, TOES, FEET, EARS, and NOSE.

What Should Be Done: (land temperatures)

- Move the person to a warm dry area. Don't leave the person alone.
- Remove any wet or tight clothing that may cut off blood flow to the affected area.
- **DO NOT** rub the affected area, because rubbing causes damage to the skin and tissue.
- **Gently** place the affected area in a warm (105°F) water bath and monitor the water temperature to **slowly** warm the tissue. Don't pour warm water directly on the affected area because it will warm the tissue too fast causing tissue damage. Warming takes about 25-40 minutes.
- After the affected area has been warmed, it may become puffy and blister. The affected area may have a burning feeling or numbness. When normal feeling, movement, and skin color have returned, the affected area should be dried and wrapped to keep it warm. **NOTE:** If there is a chance the affected area may get cold again, do not warm the skin. If the skin is warmed and then becomes cold again, it will cause severe tissue damage.
- Seek medical attention as soon as possible.

HYPOTHERMIA - (Medical Emergency)

What Happens to the Body:

NORMAL BODY TEMPERATURE (98.6° F/37°C) DROPS TO OR BELOW 95°F (35° C); FATIGUE OR DROWSINESS; UNCONTROLLED SHIVERING; COOL BLUISH SKIN; SLURRED SPEECH; CLUMSY MOVEMENTS; IRRITABLE, IRRATIONAL OR CONFUSED BEHAVIOR.

What Should Be Done: (land temperatures)

- Call for emergency help (i.e., Ambulance or Call 911).
- Move the person to a warm, dry area. Don't leave the person alone. Remove any wet clothing and replace with warm, dry clothing or wrap the person in blankets.
- Have the person drink warm, sweet drinks (sugar water or sports-type drinks) if they are alert. **Avoid drinks with caffeine** (coffee, tea, or hot chocolate) or alcohol.
- Have the person move their arms and legs to create muscle heat. If they are unable to do this, place warm bottles or hot packs in the arm pits, groin, neck, and head areas. **DO NOT** rub the person's body or place them in warm water bath. This may stop their heart.

What Should Be Done: (water temperatures)

- Call for emergency help (Ambulance or Call 911). Body heat is lost up to 25 times faster in water.
- **DO NOT** remove any clothing. Button, buckle, zip, and tighten any collars, cuffs, shoes, and hoods because the layer of trapped water closest to the body provides a layer of insulation that slows the loss of heat. Keep the head out of the water and put on a hat or hood.
- Get out of the water as quickly as possible or climb on anything floating. **DO NOT** attempt to swim unless a floating object or another person can be reached because swimming or other physical activity uses the body's heat and reduces survival time by about 50 percent.
- If getting out of the water is not possible, wait quietly and conserve body heat by folding arms across the chest, keeping thighs together, bending knees, and crossing ankles. If another person is in the water, huddle together with chests held closely.

How to Protect Workers

- Recognize the environmental and workplace conditions that lead to potential cold-induced illnesses and injuries.
- Learn the signs and symptoms of cold-induced illnesses/injuries and what to do to help the worker.
- Train the workforce about cold-induced illnesses and injuries.
- Select proper clothing for cold, wet, and windy conditions. Layer clothing to adjust to changing environmental temperatures. Wear a hat and gloves, in addition to underwear that will keep water away from the skin (polypropylene).
- Take frequent short breaks in warm dry shelters to allow the body to warm up.
- Perform work during the warmest part of the day.
- Avoid exhaustion or fatigue because energy is needed to keep muscles warm.
- Use the buddy system (work in pairs).
- Drink warm, sweet beverages (sugar water, sports-type drinks). Avoid drinks with caffeine (coffee, tea, or hot chocolate) or alcohol.
- Eat warm, high-calorie foods like hot pasta dishes.

Workers Are at Increased Risk When...

- They have predisposing health conditions such as cardiovascular disease, diabetes, and hypertension.
- They take certain medication (check with your doctor, nurse, or pharmacy and ask if any medicines you are taking affect you while working in cold environments).
- They are in poor physical condition, have a poor diet, or are older.

HASP
655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site Number: 224415



APPENDIX H

DAILY TAILGATE SAFETY MEETING LOG

HASP
655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site Number: 224415



Daily Tailgate Safety Meeting Log
(to be completed on site)

Site Name _____

Scope of Work _____

Weather _____

Safety Topics discussed _____

Employee Names:

Signatures

By signing, I acknowledge that I am knowledgeable of the scope of work being performed, the associated hazards, and will institute the controls or contingencies necessary to mitigate those hazards. Furthermore, I will stop work in the event there are new or unidentified hazards and will not commence until proper controls or contingencies are instituted to mitigate those hazards.

Signature of Site Safety Officer (or designee) _____ Date _____


Add additional sheets as necessary

HASP
655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site Number: 224415



APPENDIX I

SAFETY DATA SHEETS (SDS)



Health	2
Fire	0
Reactivity	0
Personal Protection	G

Material Safety Data Sheet Tetrachloroethylene MSDS

Section 1: Chemical Product and Company Identification

Product Name: Tetrachloroethylene

Catalog Codes: SLT3220

CAS#: 127-18-4

RTECS: KX3850000

TSCA: TSCA 8(b) inventory: Tetrachloroethylene

CI#: Not available.

Synonym: Perchloroethylene; 1,1,2,2-Tetrachloroethylene; Carbon bichloride; Carbon dichloride; Ankilostin; Didakene; Dilatin PT; Ethene, tetrachloro-; Ethylene tetrachloride; Perawin; Perchlor; Perclene; Perclene D; Percosolve; Tetrachloroethene; Tetraleno; Tetralex; Tetravec; Tetroguer; Tetropil

Chemical Name: Ethylene, tetrachloro-

Chemical Formula: C₂-Cl₄

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Tetrachloroethylene	127-18-4	100

Toxicological Data on Ingredients: Tetrachloroethylene: ORAL (LD50): Acute: 2629 mg/kg [Rat]. DERMAL (LD): Acute: >3228 mg/kg [Rabbit]. MIST(LC50): Acute: 34200 mg/m 8 hours [Rat]. VAPOR (LC50): Acute: 5200 ppm 4 hours [Mouse].

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of inhalation. Slightly hazardous in case of skin contact (permeator), of eye contact (irritant), of ingestion.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Classified A3 (Proven for animal.) by ACGIH. Classified 2A (Probable for human.) by IARC, 2 (anticipated carcinogen) by NTP. **MUTAGENIC EFFECTS:** Mutagenic for bacteria and/or yeast. **TERATOGENIC EFFECTS:** Not available. **DEVELOPMENTAL TOXICITY:** Not available. The substance may be toxic to kidneys, liver, peripheral nervous system, respiratory tract, skin, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if symptoms appear.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Non-flammable.

Auto-Ignition Temperature: Not applicable.

Flash Points: Not applicable.

Flammable Limits: Not applicable.

Products of Combustion: Not available.

Fire Hazards in Presence of Various Substances: Not applicable.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions: Not applicable.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill: Absorb with an inert material and put the spilled material in an appropriate waste disposal.

Large Spill:

Absorb with an inert material and put the spilled material in an appropriate waste disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Do not ingest. Do not breathe gas/fumes/ vapor/spray. Avoid contact with skin. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents, metals, acids, alkalis.

Storage: Keep container tightly closed. Keep container in a cool, well-ventilated area.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value.

Personal Protection:

Safety glasses. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 25 (ppm) from OSHA (PEL) [United States] TWA: 25 STEL: 100 (ppm) from ACGIH (TLV) [United States] TWA: 170 (mg/m3) from OSHA (PEL) [United States] Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Ethereal.

Taste: Not available.

Molecular Weight: 165.83 g/mole

Color: Clear Colorless.

pH (1% soln/water): Not available.

Boiling Point: 121.3°C (250.3°F)

Melting Point: -22.3°C (-8.1°F)

Critical Temperature: 347.1°C (656.8°F)

Specific Gravity: 1.6227 (Water = 1)

Vapor Pressure: 1.7 kPa (@ 20°C)

Vapor Density: 5.7 (Air = 1)

Volatility: Not available.

Odor Threshold: 5 - 50 ppm

Water/Oil Dist. Coeff.: The product is more soluble in oil; $\log(\text{oil/water}) = 3.4$

Ionicity (in Water): Not available.

Dispersion Properties: Not available.

Solubility:

Miscible with alcohol, ether, chloroform, benzene, hexane. It dissolves in most of the fixed and volatile oils. Solubility in water: 0.015 g/100 ml @ 25 deg. C It slowly decomposes in water to yield Trichloroacetic and Hydrochloric acids.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Incompatible materials

Incompatibility with various substances: Reactive with oxidizing agents, metals, acids, alkalis.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity:

Oxidized by strong oxidizing agents. Incompatible with sodium hydroxide, finely divided or powdered metals such as zinc, aluminum, magnesium, potassium, chemically active metals such as lithium, beryllium, barium. Protect from light.

Special Remarks on Corrosivity: Slowly corrodes aluminum, iron, and zinc.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 2629 mg/kg [Rat]. Acute dermal toxicity (LD50): >3228 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 5200 4 hours [Mouse].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: Classified A3 (Proven for animal.) by ACGIH. Classified 2A (Probable for human.) by IARC, 2 (Some evidence.) by NTP. MUTAGENIC EFFECTS: Mutagenic for bacteria and/or yeast. May cause damage to the following organs: kidneys, liver, peripheral nervous system, upper respiratory tract, skin, central nervous system (CNS).

Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant), of inhalation. Slightly hazardous in case of skin contact (permeator), of ingestion.

Special Remarks on Toxicity to Animals:

Lowest Published Lethal Dose/Conc: LDL [Rabbit] - Route: Oral; Dose: 5000 mg/kg LDL [Dog] - Route: Oral; Dose: 4000 mg/kg LDL [Cat] - Route: Oral; Dose: 4000 mg/kg

Special Remarks on Chronic Effects on Humans:

May cause adverse reproductive effects and birth defects (teratogenic). May affect genetic material (mutagenic). May cause cancer.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: Skin: Causes skin irritation with possible dermal blistering or burns. Symptoms may include redness, itching, pain, and possible dermal blistering or burns. It may be absorbed through the skin with possible systemic effects. A single prolonged skin exposure is not likely to result in the material being absorbed in harmful amounts. Eyes: Contact causes transient eye irritation, lacrimation. Vapors cause eye/conjunctival irritation. Symptoms may include redness and pain. Inhalation: The main route to occupational exposure is by inhalation since it is readily absorbed through the lungs. It causes respiratory tract irritation, . It can affect behavior/central nervous system (CNS depressant and anesthesia ranging from slight inebriation to death, vertigo, somnolence, anxiety, headache, excitement, hallucinations, muscle incoordination, dizziness, lightheadness, disorientation, seizures, emotional instability, stupor, coma). It may cause pulmonary edema. Ingestion: It can cause nausea, vomiting, anorexia, diarrhea, bloody stool. It may affect the liver, urinary system (proteinuria, hematuria, renal failure, renal tubular disorder), heart (arrhythmias). It may affect behavior/central nervous system with symptoms similar to that of inhalation. Chronic Potential Health Effects: Skin: Prolonged or repeated skin contact may result in excessive drying of the skin, and irritation. Ingestion/Inhalation: Chronic exposure can affect the liver (hepatitis, fatty liver degeneration), kidneys, spleen, and heart (irregular heartbeat/arrhythmias, cardiomyopathy, abnormal EEG), brain, behavior/central nervous system/peripheral nervous system (impaired memory, numbness of extremities, peripheral neuropathy and other

Section 12: Ecological Information

Ecotoxicity:

Ecotoxicity in water (LC50): 18.4 mg/l 96 hours [Fish (Fathead Minnow)]. 18 mg/l 48 hours [Daphnia (daphnia)]. 5 mg/l 96 hours [Fish (Rainbow Trout)]. 13 mg/l 96 hours [Fish (Bluegill sunfish)].

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The product itself and its products of degradation are not toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 6.1: Poisonous material.

Identification: : Tetrachloroethylene UNNA: 1897 PG: III

Special Provisions for Transport: Marine Pollutant

Section 15: Other Regulatory Information

Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Tetrachloroethylene California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Tetrachloroethylene Connecticut hazardous material survey.: Tetrachloroethylene Illinois toxic substances disclosure to employee act: Tetrachloroethylene Illinois chemical safety act: Tetrachloroethylene New York release reporting list: Tetrachloroethylene Rhode Island RTK hazardous substances: Tetrachloroethylene Pennsylvania RTK: Tetrachloroethylene Minnesota: Tetrachloroethylene Michigan critical material: Tetrachloroethylene Massachusetts RTK: Tetrachloroethylene Massachusetts spill list: Tetrachloroethylene New Jersey: Tetrachloroethylene New Jersey spill list: Tetrachloroethylene Louisiana spill reporting: Tetrachloroethylene California Director's List of Hazardous Substances: Tetrachloroethylene TSCA 8(b) inventory: Tetrachloroethylene TSCA 8(d) H and S data reporting: Tetrachloroethylene: Effective date: 6/1/87; Sunset date: 6/1/97 SARA 313 toxic chemical notification and release reporting: Tetrachloroethylene CERCLA: Hazardous substances.: Tetrachloroethylene: 100 lbs. (45.36 kg)

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada):

CLASS D-1B: Material causing immediate and serious toxic effects (TOXIC). CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

DSCL (EEC):

R40- Possible risks of irreversible effects. R51/53- Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. S23- Do not breathe gas/fumes/vapour/spray S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S37- Wear suitable gloves. S61- Avoid release to the environment. Refer to special instructions/Safety data sheets.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 0

Reactivity: 0

Personal Protection: g

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 0

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

Section 16: Other Information


References: Not available.

Other Special Considerations: Not available.

Created: 10/10/2005 08:29 PM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.



Health	2
Fire	1
Reactivity	0
Personal Protection	H

Material Safety Data Sheet Trichloroethylene MSDS

Section 1: Chemical Product and Company Identification

Product Name: Trichloroethylene

Catalog Codes: SLT3310, SLT2590

CAS#: 79-01-6

RTECS: KX4560000

TSCA: TSCA 8(b) inventory: Trichloroethylene

CI#: Not available.

Synonym:

Chemical Formula: C₂HCl₃

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Trichloroethylene	79-01-6	100

Toxicological Data on Ingredients: Trichloroethylene: ORAL (LD50): Acute: 5650 mg/kg [Rat]. 2402 mg/kg [Mouse]. DERMAL (LD50): Acute: 20001 mg/kg [Rabbit].

Section 3: Hazards Identification

Potential Acute Health Effects: Hazardous in case of skin contact (irritant, permeator), of eye contact (irritant), of ingestion, of inhalation.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Classified + (PROVEN) by OSHA. Classified A5 (Not suspected for human.) by ACGIH.

MUTAGENIC EFFECTS: Not available. **TERATOGENIC EFFECTS:** Not available. **DEVELOPMENTAL TOXICITY:** Not available. The substance is toxic to kidneys, the nervous system, liver, heart, upper respiratory tract. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Do not use an eye ointment. Seek medical attention.

Skin Contact:

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

Inhalation: Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

Ingestion:

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: May be combustible at high temperature.

Auto-Ignition Temperature: 420°C (788°F)

Flash Points: Not available.

Flammable Limits: LOWER: 8% UPPER: 10.5%

Products of Combustion: These products are carbon oxides (CO, CO₂), halogenated compounds.

Fire Hazards in Presence of Various Substances: Not available.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill: Absorb with an inert material and put the spilled material in an appropriate waste disposal.

Large Spill:

Absorb with an inert material and put the spilled material in an appropriate waste disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep locked up Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk, evaporate the residue under a fume hood. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapour/

spray. Wear suitable protective clothing In case of insufficient ventilation, wear suitable respiratory equipment If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes

Storage:

Keep container dry. Keep in a cool place. Ground all equipment containing material. Carcinogenic, teratogenic or mutagenic materials should be stored in a separate locked safety storage cabinet or room.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 50 STEL: 200 (ppm) from ACGIH (TLV) TWA: 269 STEL: 1070 (mg/m³) from ACGIH Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Not available.

Taste: Not available.

Molecular Weight: 131.39 g/mole

Color: Clear Colorless.

pH (1% soln/water): Not available.

Boiling Point: 86.7°C (188.1°F)

Melting Point: -87.1°C (-124.8°F)

Critical Temperature: Not available.

Specific Gravity: 1.4649 (Water = 1)

Vapor Pressure: 58 mm of Hg (@ 20°C)

Vapor Density: 4.53 (Air = 1)

Volatility: Not available.

Odor Threshold: 20 ppm

Water/Oil Dist. Coeff.: The product is equally soluble in oil and water; log(oil/water) = 0

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water, methanol, diethyl ether, acetone.

Solubility:

Easily soluble in methanol, diethyl ether, acetone. Very slightly soluble in cold water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances: Not available.

Corrosivity:

Extremely corrosive in presence of aluminum. Non-corrosive in presence of glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: Not available.

Polymerization: No.

Section 11: Toxicological Information

Routes of Entry: Dermal contact. Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

Acute oral toxicity (LD50): 2402 mg/kg [Mouse]. Acute dermal toxicity (LD50): 20001 mg/kg [Rabbit].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: Classified + (PROVEN) by OSHA. Classified A5 (Not suspected for human.) by ACGIH. The substance is toxic to kidneys, the nervous system, liver, heart, upper respiratory tract.

Other Toxic Effects on Humans: Hazardous in case of skin contact (irritant, permeator), of ingestion, of inhalation.

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: Passes through the placental barrier in human. Detected in maternal milk in human.

Special Remarks on other Toxic Effects on Humans: Not available.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are more toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification: CLASS 6.1: Poisonous material.

Identification: : Trichloroethylene : UN1710 PG: III

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Trichloroethylene California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Trichloroethylene Pennsylvania RTK: Trichloroethylene Florida: Trichloroethylene Minnesota: Trichloroethylene Massachusetts RTK: Trichloroethylene New Jersey: Trichloroethylene TSCA 8(b) inventory: Trichloroethylene CERCLA: Hazardous substances.: Trichloroethylene

Other Regulations: OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

Other Classifications:

WHMIS (Canada):

CLASS D-1B: Material causing immediate and serious toxic effects (TOXIC). CLASS D-2B: Material causing other toxic effects (TOXIC).

DSCL (EEC):

R36/38- Irritating to eyes and skin. R45- May cause cancer.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 1

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 1

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/10/2005 08:54 PM

Last Updated: 11/06/2008 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

Material Safety Data Sheet

1,1,1-Trichloroethane

ACC# 14370

Section 1 - Chemical Product and Company Identification

MSDS Name: 1,1,1-Trichloroethane**Catalog Numbers:** AC294930000, AC294930250, AC294932500, AC327940000, AC327940010, AC327942500, S80231, T391-20, T391-4, T398-4**Synonyms:** Methyl chloroform; Methyltrichloromethane; Trichloroethane; Trichloromethylmethane; 1,1,1-TCE.**Company Identification:**

Fisher Scientific
1 Reagent Lane
Fair Lawn, NJ 07410

For information, call: 201-796-7100**Emergency Number:** 201-796-7100**For CHEMTREC assistance, call:** 800-424-9300**For International CHEMTREC assistance, call:** 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
71-55-6	1,1,1-Trichloroethane	>96	200-756-3
123-91-1	1,4-Dioxane	2.5	204-661-8
106-88-7	1,2-Butylene oxide	0.47	203-438-2
75-52-5	Nitromethane	0.34	200-876-6

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: colorless liquid.

Warning! Causes eye, skin, and respiratory tract irritation. May be harmful if inhaled. May cause central nervous system depression. This is a CFC substance which destroys ozone in the upper atmosphere. Destruction of the ozone layer can lead to increased ultraviolet radiation which, with excess exposure to sunlight, can lead to an increase in skin cancer and eye cataracts.

Target Organs: Central nervous system, respiratory system, eyes, skin.

Potential Health Effects

Eye: Causes mild eye irritation. Vapors may cause eye irritation.

Skin: Causes skin irritation. Prolonged or repeated contact may dry/defat the skin and cause irritation. 1,4-Dioxane may cause an allergic skin reaction, and absorption of this substance may cause systemic toxicity. Methyl chloroform is an acknowledged skin irritant in guinea pigs, where a single topical application of 1 ml or repeated contact over 3 days causes edema, erythema, inflammation, and cellular degeneration. There is one case report of allergic contact dermatitis in a worker exposed to 1,1,1-trichloroethane. It is not possible to draw any conclusions from this single report.

Ingestion: Causes gastrointestinal irritation with nausea, vomiting and diarrhea. Low hazard for usual industrial handling. Although there are no case reports of aspiration, it was induced in rats in one study. In addition, based on its physical properties (viscosity and surface tension), it seems likely that 1,1,1-

trichloroethane can be aspirated.

Inhalation: Inhalation of high concentrations may cause central nervous system effects characterized by nausea, headache, dizziness, unconsciousness and coma. May cause narcotic effects in high concentration. Causes irritation of the mucous membrane and upper respiratory tract. Numerous deaths due to depression of CNS control of respiration and fatal cardiac arrhythmia have been reported from methyl chloroform inhalation (accidental or intentional) in poorly ventilated rooms, pits, tanks, and other small areas (Documentation of the TLV). Cases of intentional abuse of 1,1,1-trichloroethane in substances such as typewriter correction fluid for euphoric symptoms have been documented.

Chronic: Prolonged or repeated skin contact may cause defatting and dermatitis. Exposure to high concentrations may cause central nervous system depression. Studies with solvent abusers have established that severe cardiac arrhythmias may result from cardiac sensitization, where the heart has an increased response to circulating epinephrine. In these cases, exposures by far exceeded occupational relevant levels. Liver effects have been observed in some animal studies at high

Section 4 - First Aid Measures

Eyes: In case of contact, immediately flush eyes with plenty of water for a t least 15 minutes. Get medical aid.

Skin: In case of contact, flush skin with plenty of water. Remove contaminated clothing and shoes. Get medical aid if irritation develops and persists. Wash clothing before reuse.

Ingestion: Potential for aspiration if swallowed. Get medical aid immediately. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If vomiting occurs naturally, have victim lean forward.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: Alcoholic beverage consumption may enhance the toxic effects of this substance.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion. Use water spray to keep fire-exposed containers cool. Substance is nonflammable. Vapors may accumulate in confined spaces Methyl chloroform burns only in excess oxygen or in air if a strong source of ignition is present. No flash point in conventional closed tester; however, vapors in containers can explode if subjected to high energy source.

Extinguishing Media: Use extinguishing media most appropriate for the surrounding fire.

Flash Point: Not applicable.

Autoignition Temperature: 500 deg C (932.00 deg F)

Explosion Limits, Lower:7.0 vol %

Upper: 16 vol %

NFPA Rating: (estimated) Health: 2; Flammability: 1; Instability: 0

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks: Absorb spill with inert material (e.g. vermiculite, sand or earth), then place in suitable container. Clean up spills immediately, observing precautions in the Protective Equipment section. Provide ventilation. Approach spill from upwind.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation. Avoid contact with eyes, skin, and clothing. Keep container tightly closed. Avoid breathing vapor.

Storage: Store in a cool, dry, well-ventilated area away from incompatible substances. Do not store in aluminum containers.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate general or local exhaust ventilation to keep airborne concentrations below the permissible exposure limits.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
1,1,1-Trichloroethane	350 ppm TWA; 450 ppm STEL	700 ppm IDLH	350 ppm TWA; 1900 mg/m ³ TWA
1,4-Dioxane	20 ppm TWA; Skin - potential significant contribution to overall exposure by the cutaneous route	500 ppm IDLH	100 ppm TWA; 360 mg/m ³ TWA
1,2-Butylene oxide	none listed	none listed	none listed
Nitromethane	20 ppm TWA	750 ppm IDLH	100 ppm TWA; 250 mg/m ³ TWA

OSHA Vacated PELs: 1,1,1-Trichloroethane: 350 ppm TWA; 1900 mg/m³ TWA 1,4-Dioxane: 25 ppm TWA; 90 mg/m³ TWA 1,2-Butylene oxide: No OSHA Vacated PELs are listed for this chemical. Nitromethane: 100 ppm TWA; 250 mg/m³ TWA

Personal Protective Equipment

Eyes: Wear chemical splash goggles.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to minimize contact with skin.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

Section 9 - Physical and Chemical Properties

Physical State: Liquid

Appearance: colorless

Odor: Sweet, mild chloroform-like.

pH: Not applicable.

Vapor Pressure: 100 mm Hg @ 20 deg C

Vapor Density: 4.55 (air=1)

Evaporation Rate: 1.0 (carbon tetrachloride=1)

Viscosity: 0.86 cP @ 20 deg C

Boiling Point: 74 deg C

Freezing/Melting Point: -33 deg C

Decomposition Temperature: > 260 deg C

Solubility: Insoluble.

Specific Gravity/Density: 1.338 (water=1)

Molecular Formula: C₂H₃Cl₃

Molecular Weight: 133.38

Section 10 - Stability and Reactivity

Chemical Stability: Because of 1,1,1-TCE's reactivity with magnesium, aluminum, & their alloys, inhibitors (like 1,4-dioxane, 1,3-dioxolane, isobutyl alcohol, or nitroethane) are often added to increase the stability of the solvent & prevent corrosion of metal parts. 1,1,1-Trichloroethane reacts slowly with water to produce hydrochloric acid.

Conditions to Avoid: High temperatures, ignition sources, moisture, confined spaces.

Incompatibilities with Other Materials: Strong oxidizing agents, strong bases, aluminum, magnesium, chemically active metals.

Hazardous Decomposition Products: Hydrogen chloride, chlorine, phosgene, carbon monoxide, carbon dioxide.

Hazardous Polymerization: Will not occur.

Section 11 - Toxicological Information

RTECS#:

CAS# 71-55-6: KJ2975000

CAS# 123-91-1: JG8225000

CAS# 106-88-7: EK3675000

CAS# 75-52-5: PA9800000

LD50/LC50:

CAS# 71-55-6:

- Draize test, rabbit, eye: 100 mg Mild;
- Draize test, rabbit, eye: 2 mg/24H Severe;
- Draize test, rabbit, skin: 5 gm/12D (Intermittent) Mild;
- Draize test, rabbit, skin: 20 mg/24H Moderate;
- Inhalation, mouse: LC50 = 3911 ppm/2H;
- Inhalation, mouse: LC50 = 29492 ppm/10M;
- Inhalation, rat: LC50 = 17000 ppm/4H;
- Inhalation, rat: LC50 = 14250 ppm/7H;
- Inhalation, rat: LC50 = 20000 ppm/2H;
- Oral, mouse: LD50 = 6 gm/kg;
- Oral, rabbit: LD50 = 5660 mg/kg;
- Oral, rat: LD50 = 9600

CAS# 123-91-1:

- Draize test, rabbit, eye: 100 mg Severe;
- Draize test, rabbit, eye: 100 mg/24H Moderate;
- Inhalation, mouse: LC50 = 37 gm/m³/2H;
- Inhalation, rat: LC50 = 46 gm/m³/2H;
- Oral, mouse: LD50 = 5300 mg/kg;
- Oral, rabbit: LD50 = 2 gm/kg;
- Oral, rat: LD50 = 4200 mg/kg;
- Skin, rabbit: LD50 = 7600 uL/kg;

CAS# 106-88-7:

- Draize test, rabbit, eye: 100 mg/24H Moderate;
- Draize test, rabbit, skin: 500 mg/24H Mild;
- Inhalation, rat: LC50 = 6300 mg/m³/4H;
- Oral, rat: LD50 = 500 mg/kg;
- Skin, rabbit: LD50 = 2100 uL/kg;

CAS# 75-52-5:

- Oral, mouse: LD50 = 950 mg/kg;
- Oral, rat: LD50 = 940 mg/kg;

Carcinogenicity:

CAS# 71-55-6: Not listed by ACGIH, IARC, NTP, or CA Prop 65.

CAS# 123-91-1:

- **ACGIH:** A3 - Confirmed animal carcinogen with unknown relevance to humans
- **California:** carcinogen, initial date 1/1/88
- **NTP:** Suspect carcinogen
- **IARC:** Group 2B carcinogen

CAS# 106-88-7:

- **ACGIH:** Not listed.
- **California:** Not listed.
- **NTP:** Not listed.
- **IARC:** Group 2B carcinogen

CAS# 75-52-5:

- **ACGIH:** A3 - Confirmed animal carcinogen with unknown relevance to humans
- **California:** carcinogen, initial date 5/1/97
- **NTP:** Suspect carcinogen
- **IARC:** Group 2B carcinogen

Epidemiology: No information found

Teratogenicity: Animal evidence suggests that 1,1,1-TCE is not teratogenic at exposures which are not maternally toxic. Slight fetotoxicity (for example, reduced fetal weight) has been reported at doses which were not maternally toxic.

Reproductive Effects: Animal evidence suggests that 1,1,1-TCE does not cause reproductive effects.

Mutagenicity: Evidence from studies using live animals suggests that 1,1,1-trichloroethane is not mutagenic.

Neurotoxicity: Some studies using sensitive neurobehavioural tests have shown altered scores for exposed workers. However, whether or not these results indicate nervous system damage is not clear. Other studies with 1,1,1-TCE have not shown any changes.

Other Studies:

Section 12 - Ecological Information

Ecotoxicity: Fish: Fathead Minnow: EC50 = 52.9 mg/L; 96 Hr; Flow-through at 25.5°C Fish: Bluegill/Sunfish: LC50 = 72 mg/L; 96 Hr; Static bioassay Fish: Fathead Minnow: LC50 = 52.9 mg/L; 96 Hr; Flow-through at 25.5°C Fish: Sheepshead minnow: LC50 = 53-72 mg/L; 96 Hr; Unspecified Water flea Daphnia: EC50 > 530 mg/L; 48 Hr; Unspecified Releases to surface water will decrease in concn almost entirely due to evaporation. Spills on land will decrease in concentration almost entirely due to volatilization and leaching.

Environmental: Releases to air may be transported long distances and partially return to earth in rain. In the troposphere, 1,1,1-trichloroethane will degrade very slowly by photooxidation and also slowly diffuse to the stratosphere where photodegradation will be rapid. This substance has a high potential for oxone depletion.

Physical: No information available.

Other: No information available.

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed.

RCRA U-Series:

CAS# 71-55-6: waste number U226.

CAS# 123-91-1: waste number U108.

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	1,1,1-TRICHLOROETHANE	1,1,1-TRICHLOROETHANE
Hazard Class:	6.1	6.1
UN Number:	UN2831	UN2831
Packing Group:	III	III

Section 15 - Regulatory Information

US FEDERAL**TSCA**

CAS# 71-55-6 is listed on the TSCA inventory.

CAS# 123-91-1 is listed on the TSCA inventory.

CAS# 106-88-7 is listed on the TSCA inventory.

CAS# 75-52-5 is listed on the TSCA inventory.

Health & Safety Reporting List

CAS# 71-55-6: Effective 10/4/82, Sunset 10/4/92 CAS# 106-88-7: Effective 10/4/82, Sunset 10/4/92

CAS# 75-52-5: Effective 4/13/89, Sunset 12/19/95

Chemical Test Rules

CAS# 71-55-6: 40 CFR 799.5000

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

CAS# 71-55-6: 1000 lb final RQ; 454 kg final RQ CAS# 123-91-1: 100 lb final RQ; 45.4 kg final RQ

CAS# 106-88-7: 100 lb final RQ; 45.4 kg final RQ

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPQ.

SARA Codes

CAS # 71-55-6: immediate.

CAS # 123-91-1: delayed, fire.

CAS # 106-88-7: immediate.

CAS # 75-52-5: immediate, delayed, fire, reactive.

Section 313

This material contains 1,1,1-Trichloroethane (CAS# 71-55-6, >96%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR

This material contains 1,4-Dioxane (CAS# 123-91-1, 2.5%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

This material contains 1,2-Butylene oxide (CAS# 106-88-7, 0.47%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

Clean Air Act:

CAS# 71-55-6 is listed as a hazardous air pollutant (HAP).

CAS# 123-91-1 is listed as a hazardous air pollutant (HAP).

CAS# 106-88-7 is listed as a hazardous air pollutant (HAP).

CAS# 71-55-6 is listed as a Class 1 ozone depletor with an 0.1 ODP; 110 GWP

This material does not contain any Class 2 Ozone depletors.

Clean Water Act:

None of the chemicals in this product are listed as Hazardous Substances under the CWA. CAS# 71-

55-6 is listed as a Priority Pollutant under the Clean Water Act. CAS# 71-55-6 is listed as a Toxic Pollutant under the Clean Water Act.

OSHA:

CAS# 75-52-5 is considered highly hazardous by OSHA.

STATE

CAS# 71-55-6 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

CAS# 123-91-1 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

CAS# 106-88-7 can be found on the following state right to know lists: New Jersey, Pennsylvania, Minnesota, Massachusetts.

CAS# 75-52-5 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

California Prop 65

WARNING: This product contains 1,4-Dioxane, a chemical known to the state of California to cause cancer.

WARNING: This product contains Nitromethane, a chemical known to the state of California to cause cancer.

California No Significant Risk Level: CAS# 123-91-1: 30 æg/day NSRL

European/International Regulations**European Labeling in Accordance with EC Directives****Hazard Symbols:**

XN N

Risk Phrases:

R 20 Harmful by inhalation.

R 59 Dangerous for the ozone layer.

Safety Phrases:

S 24/25 Avoid contact with skin and eyes.

S 59 Refer to manufacturer/supplier for information on recovery/recycling.

S 61 Avoid release to the environment. Refer to special instructions/safety data sheets.

WGK (Water Danger/Protection)

CAS# 71-55-6: 3

CAS# 123-91-1: 2

CAS# 106-88-7: 3

CAS# 75-52-5: 2

Canada - DSL/NDSL

CAS# 71-55-6 is listed on Canada's DSL List.

CAS# 123-91-1 is listed on Canada's DSL List.

CAS# 106-88-7 is listed on Canada's DSL List.

CAS# 75-52-5 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of D1B, D2B.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

CAS# 71-55-6 is listed on the Canadian Ingredient Disclosure List.

CAS# 123-91-1 is listed on the Canadian Ingredient Disclosure List.

CAS# 75-52-5 is listed on the Canadian Ingredient Disclosure List.

Section 16 - Additional Information

MSDS Creation Date: 6/11/1999

Revision #5 Date: 3/16/2007

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its

use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.

Material Safety Data Sheet

Lead

ACC# 12510

Section 1 - Chemical Product and Company Identification

MSDS Name: Lead**Catalog Numbers:** S71957, S719571, S75257, S80049, L18-500, L246-500, L27-1LB, L27-1RL, NC9657609, NC9888945, XXL24625KG**Synonyms:** Lead metal.**Company Identification:**

Fisher Scientific
1 Reagent Lane
Fair Lawn, NJ 07410

For information, call: 201-796-7100**Emergency Number:** 201-796-7100**For CHEMTREC assistance, call:** 800-424-9300**For International CHEMTREC assistance, call:** 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
7439-92-1	Lead	99.8	231-100-4

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: bluish white, silvery gray solid.

Warning! Possible cancer hazard. May cause cancer based on animal data. Causes eye and skin irritation. Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. May be absorbed through intact skin. May cause central nervous system depression. May cause kidney damage. May cause adverse reproductive effects. May cause fetal effects.

Target Organs: Kidneys, central nervous system, blood forming organs.**Potential Health Effects****Eye:** Causes eye irritation.**Skin:** Causes skin irritation. May be absorbed through the skin.

Ingestion: Causes gastrointestinal irritation with nausea, vomiting and diarrhea. Ingestion of lead compounds can cause toxic effects in the blood-forming organs, kidneys and central nervous system. Symptoms of lead poisoning or plumbism include weakness, weight loss, lassitude, insomnia, and hypotension. It also includes constipation, anorexia, abdominal discomfort and colic.

Inhalation: May cause respiratory tract irritation. Inhalation of fumes may cause metal fume fever, which is characterized by flu-like symptoms with metallic taste, fever, chills, cough, weakness, chest pain, muscle pain and increased white blood cell count. May cause effects similar to those described for ingestion.

Chronic: Possible cancer hazard based on tests with laboratory animals. Chronic exposure may cause reproductive disorders and teratogenic effects. Chronic exposure to lead may result in plumbism which is characterized by lead line in gum, headache, muscle weakness, mental changes.

Section 4 - First Aid Measures

Eyes: Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.

Skin: Get medical aid. Immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Discard contaminated clothing in a manner which limits further exposure.

Ingestion: Get medical aid immediately. Do NOT induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cupfuls of milk or water.

Inhalation: Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: Treat symptomatically and supportively.

Antidote: The use of Dimercaprol or BAL (British Anti-Lewisite) as a chelating agent should be determined by qualified medical personnel. The use of d-Penicillamine as a chelating agent should be determined by qualified medical personnel. The use of Calcium disodium EDTA as a chelating agent should be determined by qualified medical personnel.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion. Use extinguishing media appropriate to the surrounding fire. Substance is noncombustible. Dust can be an explosion hazard when exposed to heat or flame.

Extinguishing Media: For small fires, use water spray, dry chemical, carbon dioxide or chemical foam. Substance is noncombustible; use agent most appropriate to extinguish surrounding fire.

Flash Point: Not available.

Autoignition Temperature: Not available.

Explosion Limits, Lower: Not available.

Upper: Not available.

NFPA Rating: (estimated) Health: 2; Flammability: 0; Instability: 0

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks: Vacuum or sweep up material and place into a suitable disposal container. Clean up spills immediately, observing precautions in the Protective Equipment section. Avoid generating dusty conditions. Provide ventilation.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Avoid ingestion and inhalation. Wash clothing before reuse.

Storage: Store in a cool, dry place. Keep from contact with oxidizing materials. Keep containers tightly closed.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate general or local exhaust ventilation to keep airborne concentrations below

the permissible exposure limits.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
Lead	0.05 mg/m ³ TWA	0.050 mg/m ³ TWA 100 mg/m ³ IDLH	50 æg/m ³ TWA; 50 æg/m ³ TWA (as Pb); 30 æg/m ³ Action Level (as Pb. Poison - see 29 CFR 1910.10 25)

OSHA Vacated PELs: Lead: No OSHA Vacated PELs are listed for this chemical.

Personal Protective Equipment

Eyes: Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin: Wear appropriate protective gloves and clothing to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Section 9 - Physical and Chemical Properties

Physical State: Solid

Appearance: bluish white, silvery gray

Odor: none reported

pH: Not applicable.

Vapor Pressure: 1.3 mm Hg @ 970C

Vapor Density: Not available.

Evaporation Rate: Not applicable.

Viscosity: Not applicable.

Boiling Point: 1740 deg C

Freezing/Melting Point: 327.4 deg C

Decomposition Temperature: Not available.

Solubility: Insoluble in water.

Specific Gravity/Density: 11.3

Molecular Formula: Pb

Molecular Weight: 207.2

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.

Conditions to Avoid: Dust generation, excess heat.

Incompatibilities with Other Materials: Strong oxidizing agents.

Hazardous Decomposition Products: Lead/lead oxides.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#:

CAS# 7439-92-1: OF7525000

LD50/LC50:

Not available.

Carcinogenicity:

CAS# 7439-92-1:

- **ACGIH:** A3 - Confirmed animal carcinogen with unknown relevance to humans
- **California:** carcinogen, initial date 10/1/92
- **NTP:** Suspect carcinogen
- **IARC:** Group 2A carcinogen

Epidemiology: There are several reports that certain lead compounds administered to animals in high doses are carcinogenic, primarily producing renal tumors. Salts demonstrating carcinogenicity in animals are usually soluble salts. Epidemiological studies have not shown a relationship between lead exposure and the incidence of cancer in lead workers. However, one study of lead-exposed workers demonstrated a statistically significant elevation in the standardized mortality ratio for gastric and lung cancer in battery plant workers only.

Teratogenicity: Lead penetrates the placental barrier and has caused fetal abnormalities in animals. Excessive exposure to lead during pregnancy has caused neurological disorders in infants.

Reproductive Effects: Reproductive effects from lead have been documented in animals and human beings of both sexes. In battery workmen with a mean exposure of 8.5 years to lead, there was an increased frequency of sperm abnormalities as compared with a control group.

Mutagenicity: Mutagenic effects have occurred in humans.

Neurotoxicity: Subtle neurologic effects have been demonstrated with relatively low blood levels of lead. The performance of lead workers on various neurophysiological tests was mildly reduced when compared with a control group. Anxiety, depression, poor concentration, forgetfulness, mild reductions in motor and sensory nerve conduction velocities have been documented in lead-exposed workers.

Other Studies:

Section 12 - Ecological Information

Ecotoxicity: No data available. LC50 Japanese quail (*Coturnix japonica*), males or females, 14 days old, oral (5-day ad libitum in diet) >5,000 ppm; at 1000, 2236 & 5000 onset of toxic signs began at 7, 7 & 7 days and remitted at 11, 11 & 12 days, respectively, no mortality was observed; control references were dieldrin & dicrotophos; corn oil diluent was added to diet at ratio of 2:98 by wt; (extreme concentrations: 1,000-5,000 ppm) /Lead metal, 100%.

Environmental: Terrestrial: Extremely stable metal. While some corrosion may be expected in soil, generally an inert coat of an insoluble salt will form and limit further corrosion. Aquatic: Lead will simply sink into the sediment. Atmospheric: Will be in particulate matter and be subject to washout and gravitational settling. Will biodegrade and bioconcentrate.

Physical: No information available.

Other: For more information, see "HANDBOOK OF ENVIRONMENTAL FATE AND EXPOSURE DATA."

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed.

RCRA U-Series: None listed.

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	Not regulated	Not Regulated
Hazard Class:		
UN Number:		
Packing Group:		

Section 15 - Regulatory Information

US FEDERAL

TSCA

CAS# 7439-92-1 is listed on the TSCA inventory.

Health & Safety Reporting List

None of the chemicals are on the Health & Safety Reporting List.

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

CAS# 7439-92-1: 10 lb final RQ (no reporting of releases of this hazardous substance is required)

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPQ.

SARA Codes

CAS # 7439-92-1: immediate, delayed.

Section 313

This material contains Lead (CAS# 7439-92-1, 99.8%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

Clean Air Act:

This material does not contain any hazardous air pollutants.

This material does not contain any Class 1 Ozone depleters.

This material does not contain any Class 2 Ozone depleters.

Clean Water Act:

None of the chemicals in this product are listed as Hazardous Substances under the CWA. CAS# 7439-92-1 is listed as a Priority Pollutant under the Clean Water Act. CAS# 7439-92-1 is listed as a Toxic Pollutant under the Clean Water Act.

OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

CAS# 7439-92-1 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

California Prop 65

The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act:

WARNING: This product contains Lead, a chemical known to the state of California to cause cancer.

WARNING: This product contains Lead, a chemical known to the state of California to cause male reproductive toxicity.

California No Significant Risk Level: CAS# 7439-92-1: 15 μ g/day NSRL (oral)

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols:

T N

Risk Phrases:

R 20/22 Harmful by inhalation and if swallowed.

R 33 Danger of cumulative effects.

R 61 May cause harm to the unborn child.

R 62 Possible risk of impaired fertility.

R 50/53 Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Safety Phrases:

S 45 In case of accident or if you feel unwell, seek medical advice

immediately (show the label where possible).

S 53 Avoid exposure - obtain special instructions before use.

S 60 This material and its container must be disposed of as hazardous waste.

S 61 Avoid release to the environment. Refer to special instructions /safety data sheets.

WGK (Water Danger/Protection)

CAS# 7439-92-1: No information available.

Canada - DSL/NDSL

CAS# 7439-92-1 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of D2A.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

CAS# 7439-92-1 is listed on the Canadian Ingredient Disclosure List.

Section 16 - Additional Information

MSDS Creation Date: 4/29/1999

Revision #5 Date: 5/22/2007

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.

Material Safety Data Sheet

Benzene

ACC# 02610

Section 1 - Chemical Product and Company Identification

MSDS Name: Benzene

Catalog Numbers: AC167660000, AC167660010, AC167660025, AC167660250, AC167665000, AC168650250, AC295330000, AC295330010, AC295330025, AC295330250, AC296880000, AC296880010, AC296880025, AC296880250, AC610230010, AC610231000, AC611001000, B243-4, B245-4, B245-500, B411-1, B411-4, B412-1, S79920ACS

Synonyms: Benzol; Cyclohexatriene; Phenyl hydride.**Company Identification:**

Fisher Scientific
1 Reagent Lane
Fair Lawn, NJ 07410

For information, call: 201-796-7100**Emergency Number:** 201-796-7100**For CHEMTREC assistance, call:** 800-424-9300**For International CHEMTREC assistance, call:** 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
71-43-2	Benzene	> 99	200-753-7

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: clear colorless liquid. Flash Point: -11 deg C.

Danger! Extremely flammable liquid and vapor. Vapor may cause flash fire. Harmful if swallowed, inhaled, or absorbed through the skin. Causes eye, skin, and respiratory tract irritation. Contains benzene. Benzene can cause cancer. Aspiration hazard if swallowed. Can enter lungs and cause damage. May cause blood abnormalities. May cause central nervous system effects.

Target Organs: Blood, central nervous system, respiratory system, eyes, bone marrow, immune system, skin.

Potential Health Effects

Eye: Causes eye irritation.

Skin: Causes skin irritation. Harmful if absorbed through the skin. Prolonged and/or repeated contact may cause defatting of the skin and dermatitis.

Ingestion: May cause central nervous system depression, characterized by excitement, followed by headache, dizziness, drowsiness, and nausea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure. May cause effects similar to those for inhalation exposure. Aspiration of material into the lungs may cause chemical pneumonitis, which may be fatal.

Inhalation: Causes respiratory tract irritation. May cause drowsiness, unconsciousness, and central nervous system depression. Exposure may lead to irreversible bone marrow injury. Exposure may lead to aplastic anemia. Potential symptoms of overexposure by inhalation are dizziness, headache, vomiting, visual disturbances, staggering gait, hilarity, fatigue, and other symptoms of CNS depression.

Chronic: May cause bone marrow abnormalities with damage to blood forming tissues. May cause anemia

and other blood cell abnormalities. Chronic exposure to benzene has been associated with an increased incidence of leukemia and multiple myeloma (tumor composed of cells of the type normally found in the bone marrow). Immunodepressive effects have been reported. This substance has caused adverse reproductive and fetal effects in laboratory animals.

Section 4 - First Aid Measures

Eyes: In case of contact, immediately flush eyes with plenty of water for a t least 15 minutes. Get medical aid.

Skin: In case of contact, flush skin with plenty of water. Remove contaminated clothing and shoes. Get medical aid if irritation develops and persists. Wash clothing before reuse.

Ingestion: Potential for aspiration if swallowed. Get medical aid immediately. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If vomiting occurs naturally, have victim lean forward.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: Treat symptomatically and supportively.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Use water spray to keep fire-exposed containers cool. Extremely flammable liquid and vapor. Vapor may cause flash fire. Approach fire from upwind to avoid hazardous vapors and toxic decomposition products. Vapors are heavier than air and may travel to a source of ignition and flash back. Vapors can spread along the ground and collect in low or confined areas. This liquid floats on water and may travel to a source of ignition and spread fire. May accumulate static electricity.

Extinguishing Media: Use water spray, dry chemical, carbon dioxide, or appropriate foam.

Flash Point: -11 deg C (12.20 deg F)

Autoignition Temperature: 498 deg C (928.40 deg F)

Explosion Limits, Lower: 1.3 vol %

Upper: 7.1 vol %

NFPA Rating: (estimated) Health: 2; Flammability: 3; Instability: 0

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks: Absorb spill with inert material (e.g. vermiculite, sand or earth), then place in suitable container. Avoid runoff into storm sewers and ditches which lead to waterways. Remove all sources of ignition. Provide ventilation. Approach spill from upwind. Use water spray to cool and disperse vapors, protect personnel, and dilute spills to form nonflammable mixtures.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Ground and bond containers when transferring material. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Take precautionary measures against static discharges. Keep container tightly closed. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames. Use only with adequate ventilation. Keep away from heat, sparks and flame. Avoid breathing vapor.

Storage: Keep away from sources of ignition. Store in a tightly closed container. Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Use process enclosure, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. See 29CFR 1910.1028 for the regulatory requirements for the control of employee exposure to benzene.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
Benzene	0.5 ppm TWA; 2.5 ppm STEL; Skin - potential significant contribution to overall exposure by the cutaneous route	0.1 ppm TWA 500 ppm IDLH	1 ppm TWA; 10 ppm TWA (applies to industry segments exempt from the benzene standard at 29 CFR 1910.1028); 25 ppm Ceiling (applies to industry segments exempt from the 1 ppm TWA and 5 ppm STEL of the benzene standard); 0.5 ppm Action Level; 1 ppm TWA; 5 ppm STEL (Cancer hazard, Flammable - see 29 CFR 1910.1028)

OSHA Vacated PELs: Benzene: 10 ppm TWA (unless specified in 1910.1028)

Personal Protective Equipment

Eyes: Wear chemical splash goggles.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

Section 9 - Physical and Chemical Properties

Physical State: Liquid

Appearance: clear colorless

Odor: sweetish odor - aromatic odor

pH: Not applicable.

Vapor Pressure: 75 mm Hg @ 20 deg C

Vapor Density: 2.8 (air=1)

Evaporation Rate: Not available.

Viscosity: 0.647mPa @ 20 deg C

Boiling Point: 80.1 deg C

Freezing/Melting Point: 5.5 deg C

Decomposition Temperature: Not available.

Solubility: 0.180 g/100 ml @ 25°C

Specific Gravity/Density: 0.8765 @ 20°C

Molecular Formula: C₆H₆

Molecular Weight: 78.11

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.
Conditions to Avoid: Ignition sources, excess heat, confined spaces.
Incompatibilities with Other Materials: Strong oxidizing agents.
Hazardous Decomposition Products: Carbon monoxide, carbon dioxide.
Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#:

CAS# 71-43-2: CY1400000

LD50/LC50:

CAS# 71-43-2:

Dermal, guinea pig: LD50 = >9400 uL/kg;
Draize test, rabbit, eye: 88 mg Moderate;
Draize test, rabbit, eye: 2 mg/24H Severe;
Draize test, rabbit, skin: 20 mg/24H Moderate;
Inhalation, mouse: LC50 = 9980 ppm;
Inhalation, mouse: LC50 = 24 mL/kg/2H;
Inhalation, rat: LC50 = 10000 ppm/7H;
Inhalation, rat: LC50 = 34 mL/kg/2H;
Inhalation, rat: LC50 = 6.5 mL/kg/4H;
Oral, mouse: LD50 = 4700 mg/kg;
Oral, rat: LD50 = 930 mg/kg;
Oral, rat: LD50 = 1 mL/kg;
Oral, rat: LD50 = 1800 Benzene is considered very toxic; probable human oral lethal dose would be 50-500 mg/kg. Human inhalation of approximately 20,000 ppm (2% in air) was fatal in 5-10 minutes. While percutaneous absorption of liquid benzene through intact human skin can be limited (e.g., 0.05% of the applied dose), the absorbed dose via direct dermal contact combined with that received from body surface exposure to benzene in workplace air is such that a substantial fraction (20-40%) of the total exposure is due to skin absorption.

Carcinogenicity:

CAS# 71-43-2:

- **ACGIH:** A1 - Confirmed Human Carcinogen
- **California:** carcinogen, initial date 2/27/87
- **NTP:** Known carcinogen
- **IARC:** Group 1 carcinogen

Epidemiology: IARC has concluded that epidemiological studies have established the relationship between benzene exposure and the development of acute myelogenous leukemia, and that there is sufficient evidence that benzene is carcinogenic to humans.

Teratogenicity: Inhalation, rat: TCLO = 50 ppm/24H (female 7-14 day(s) after conception) Effects on Embryo or Fetus - extra-embryonic structures (e.g., placenta, umbilical cord) and Effects on Embryo or Fetus - fetotoxicity (except death, e.g., stunted fetus).; Inhalation, mouse: TCLO = 5 ppm (female 6-15 day(s) after conception) Effects on Embryo or Fetus - cytological changes (including somatic cell genetic material) and Specific Developmental Abnormalities - blood and lymphatic systems (including spleen and marrow).

Reproductive Effects: Inhalation, rat: TCLO = 670 mg/m³/24H (female 15 day(s) pre-mating and female 1-22 day(s) after conception) female fertility index (e.g. # females pregnant per # sperm positive females; # females pregnant per # females mated).; Oral, mouse: TDLo = 12 gm/kg (female 6-15 day(s) after conception) Fertility - post-implantation mortality (e.g. dead and/or resorbed implants per total number of implants).

Mutagenicity: DNA Inhibition: Human, Leukocyte = 2200 umol/L.; DNA Inhibition: Human, HeLa cell = 2200 umol/L.; Mutation Test Systems - not otherwise specified: Human, Lymphocyte = 5 umol/L.; Cytogenetic Analysis: Inhalation, Human = 125 ppm/1Y.; Cytogenetic Analysis: Human, Leukocyte = 1 mmol/L/72H.; Cytogenetic Analysis: Human, Lymphocyte = 1 mg/L.

Neurotoxicity: See actual entry in RTECS for complete information.

Other Studies:

Section 12 - Ecological Information

Ecotoxicity: Fish: Mosquito Fish: TLm = 395 mg/L; 24 Hr; Unspecified Fish: Goldfish: LC50 = 46 mg/L; 24 Hr; Modified ASTM D 1345 Fish: Fathead Minnow: LC50 = 15.1 mg/L; 96 Hr; Flow-through at 25°C (pH 7.9-8.0) Fish: Rainbow trout: LC50 = 5.3 mg/L; 96 Hr; Flow-through at 25°C (pH 7.9-8.0) Fish: Bluegill/Sunfish: LD50 = 20 mg/L; 24-48 Hr; Unspecified If benzene is released to soil, it will be subject to rapid volatilization near the surface and that which does not evaporate will be highly to very highly mobile in the soil and may leach to groundwater. If benzene is released to water, it will be subject to rapid volatilization. It will not be expected to significantly adsorb to sediment, bioconcentrate in aquatic organisms or hydrolyze. It may be subject to biodegradation.

Environmental: If benzene is released to the atmosphere, it will exist predominantly in the vapor phase. Gas-phase benzene will not be subject to direct photolysis but it will react with photochemically produced hydroxyl radicals with a half-life of 13.4 days. The reaction time in polluted atmospheres which contain nitrogen oxides or sulfur dioxide is accelerated with the half-life being reported as 4-6 hours. Benzene is fairly soluble in water and is removed from the atmosphere in rain.

Physical: Products of photooxidation include phenol, nitrophenols, nitrobenzene, formic acid, and peroxyacetyl nitrate.

Other: No information available.

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed.

RCRA U-Series:

CAS# 71-43-2: waste number U019 (Ignitable waste, Toxic waste).

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	BENZENE	BENZENE
Hazard Class:	3	3
UN Number:	UN1114	UN1114
Packing Group:	II	II
Additional Info:		FLASHPOINT -11 C

Section 15 - Regulatory Information

US FEDERAL

TSCA

CAS# 71-43-2 is listed on the TSCA inventory.

Health & Safety Reporting List

None of the chemicals are on the Health & Safety Reporting List.

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

CAS# 71-43-2: 10 lb final RQ (received an adjusted RQ of 10 lbs based on potential carcinogen)

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPQ.

SARA Codes

CAS # 71-43-2: immediate, delayed, fire.

Section 313

This material contains Benzene (CAS# 71-43-2, > 99%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

Clean Air Act:

CAS# 71-43-2 is listed as a hazardous air pollutant (HAP).

This material does not contain any Class 1 Ozone depleters.

This material does not contain any Class 2 Ozone depleters.

Clean Water Act:

CAS# 71-43-2 is listed as a Hazardous Substance under the CWA. CAS# 71-43-2 is listed as a Priority Pollutant under the Clean Water Act. CAS# 71-43-2 is listed as a Toxic Pollutant under the Clean Water Act.

OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

CAS# 71-43-2 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

California Prop 65**The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act:**

WARNING: This product contains Benzene, a chemical known to the state of California to cause cancer.

WARNING: This product contains Benzene, a chemical known to the state of California to cause male reproductive toxicity.

California No Significant Risk Level: CAS# 71-43-2: 6.4 µg/day NSRL (oral); 13 µg/day NSRL (inhalation)

European/International Regulations**European Labeling in Accordance with EC Directives****Hazard Symbols:**

T F

Risk Phrases:

R 11 Highly flammable.

R 36/38 Irritating to eyes and skin.

R 45 May cause cancer.

R 46 May cause heritable genetic damage.

R 48/23/24/25 Toxic : danger of serious damage to health by prolonged exposure through inhalation, contact with skin and if swallowed.

R 65 Harmful: may cause lung damage if swallowed.

Safety Phrases:

S 45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

S 53 Avoid exposure - obtain special instructions before use.

WGK (Water Danger/Protection)

CAS# 71-43-2: 3

Canada - DSL/NDSL

CAS# 71-43-2 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of B2, D2A, D2B.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

CAS# 71-43-2 is listed on the Canadian Ingredient Disclosure List.

Section 16 - Additional Information

MSDS Creation Date: 6/11/1999

Revision #8 Date: 9/11/2008

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.

according to Regulation (EC) No. 1907/2006 as amended by (EC) No. 2015/830 and US OSHA HCS 2015

Section 1. Identification of the Substance/Mixture and of the Company/Undertaking

- 1.1 Product Code:** 24243
Product Name: p,p'-DDT
Synonyms: 1,1'-(2,2,2-trichloroethylidene)bis[4-chloro-benzene]; 4,4'-DDT;
 4,4'-Dichlorodiphenyltrichloroethane; p,p'-Dichlorodiphenyltrichloroethane; Dicophaner; NSC 8939;
- 1.2 Relevant identified uses of the substance or mixture and uses advised against:**
Relevant identified uses: For research use only, not for human or veterinary use.
- 1.3 Details of the Supplier of the Safety Data Sheet:**
Company Name: Cayman Chemical Company
 1180 E. Ellsworth Rd.
 Ann Arbor, MI 48108
Web site address: www.caymanchem.com
Information: Cayman Chemical Company +1 (734)971-3335
- 1.4 Emergency telephone number:**
Emergency Contact: CHEMTREC Within USA and Canada: +1 (800)424-9300
 CHEMTREC Outside USA and Canada: +1 (703)527-3887

Section 2. Hazards Identification

- 2.1 Classification of the Substance or Mixture:**
Acute Toxicity: Oral, Category 3
Carcinogenicity, Category 2
Specific Target Organ Toxicity (repeated exposure), Category 1
Aquatic Toxicity (Acute), Category 1
Aquatic Toxicity (Chronic), Category 1

2.2 Label Elements:



GHS Signal Word: **Danger**

GHS Hazard Phrases:

- H301: Toxic if swallowed.
 H351: Suspected of causing cancer.
 H372: Causes damage to organs through prolonged or repeated exposure.
 H400: Very toxic to aquatic life.
 H410: Very toxic to aquatic life with long lasting effects.

GHS Precaution Phrases:

- P201: Obtain special instructions before use.
 P202: Do not handle until all safety precautions have been read and understood.
 P260: Do not breathe (dust/fume/gas/mist/vapors/spray).
 P264: Wash {hands} thoroughly after handling.
 P273: Avoid release to the environment.
 P280: Wear {protective gloves/protective clothing/eye protection/face protection}.

GHS Response Phrases:

- P301+310: IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.
 P308+313: IF exposed or concerned: Get medical attention/advice.

P314: Get medical attention/advice if you feel unwell.

P330: Rinse mouth.

P391: Collect spillage.

GHS Storage and Disposal Phrases:

Please refer to Section 7 for Storage and Section 13 for Disposal information.

- 2.3 Adverse Human Health** Causes damage to organs through prolonged or repeated exposure.
- Effects and Symptoms:** Material may be irritating to the mucous membranes and upper respiratory tract.
- May be harmful by inhalation or skin absorption.
- May cause eye, skin, or respiratory system irritation.
- Suspected of causing cancer.
- Toxic if swallowed.
- Very toxic to aquatic life with long lasting effects.
- To the best of our knowledge, the toxicological properties have not been thoroughly investigated.

Section 3. Composition/Information on Ingredients

CAS # / RTECS #	Hazardous Components (Chemical Name)/ REACH Registration No.	Concentration	EC No./ EC Index No.	GHS Classification
50-29-3 KJ3325000	DDT {1,1,1-Trichloro-2,2-bis(p-chlorophenyl)ethane; Clofenotane; 4,4-DDT; Dichlorodiphenyltrichloroethane}	100.0 %	200-024-3 602-045-00-7	Acute Tox.(O) 3: H301 Carcinogen 2: H351 STOT (RE) 1: H372 Aquatic (A) 1: H400 Aquatic (C) 1: H410

Section 4. First Aid Measures

- 4.1 Description of First Aid Measures:**
- In Case of Inhalation:** Remove to fresh air. If not breathing, give artificial respiration or give oxygen by trained personnel. Get immediate medical attention.
- In Case of Skin Contact:** Immediately wash skin with soap and plenty of water for at least 15 minutes. Remove contaminated clothing. Get medical attention if symptoms occur. Wash clothing before reuse.
- In Case of Eye Contact:** Hold eyelids apart and flush eyes with plenty of water for at least 15 minutes. Have eyes examined and tested by medical personnel.
- In Case of Ingestion:** Wash out mouth with water provided person is conscious. Never give anything by mouth to an unconscious person. Get medical attention. Do NOT induce vomiting unless directed to do so by medical personnel.

Section 5. Fire Fighting Measures

- 5.1 Suitable Extinguishing** Use alcohol-resistant foam, carbon dioxide, water, or dry chemical spray.
- Media:** Use water spray to cool fire-exposed containers.
- Unsuitable Extinguishing** A solid water stream may be inefficient.
- Media:**
- 5.2 Flammable Properties and Hazards:** No data available.
- Hazards:** No data available.
- Flash Pt:** No data.
- Explosive Limits:** LEL: No data. UEL: No data.
- Autoignition Pt:** No data.
- 5.3 Fire Fighting Instructions:** As in any fire, wear self-contained breathing apparatus pressure-demand (NIOSH approved or equivalent), and full protective gear to prevent contact with skin and eyes.

Section 6. Accidental Release Measures

- 6.1 Protective Precautions,** Avoid breathing vapors and provide adequate ventilation.
Protective Equipment and As conditions warrant, wear a NIOSH approved self-contained breathing apparatus, or respirator,
Emergency Procedures: and appropriate personal protection (rubber boots, safety goggles, and heavy rubber gloves).
- 6.2 Environmental** Take steps to avoid release into the environment, if safe to do so.
Precautions:
- 6.3 Methods and Material For** Contain spill and collect, as appropriate.
Containment and Cleaning Transfer to a chemical waste container for disposal in accordance with local regulations.
Up:

Section 7. Handling and Storage

- 7.1 Precautions To Be Taken** Avoid breathing dust/fume/gas/mist/vapours/spray.
in Handling: Avoid prolonged or repeated exposure.
- 7.2 Precautions To Be Taken** Keep container tightly closed.
in Storing: Store in accordance with information listed on the product insert.

Section 8. Exposure Controls/Personal Protection

8.1 Exposure Parameters:

CAS #	Chemical Name	Jurisdiction	Recommended Exposure Limits	Notations
50-29-3	DDT {1,1,1-Trichloro-2,2-bis(p-chlorophenyl)ethane; Clofenotane; 4,4-DDT; Dichlorodiphenyltrichloroethane}	ACGIH TLV	TLV: 1 mg/m3	
		France VL	TWA: 1 mg/m3	
		OSHA PELs	PEL: 1 mg/m3	

8.2 Exposure Controls:

- 8.2.1 Engineering Controls** Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits.
(Ventilation etc.):
- 8.2.2 Personal protection equipment:**
- Eye Protection:** Safety glasses
- Protective Gloves:** Compatible chemical-resistant gloves
- Other Protective Clothing:** Lab coat
- Respiratory Equipment** NIOSH approved respirator, as conditions warrant.
(Specify Type):
- Work/Hygienic/Maintenance Practices:** Do not take internally.
 Facilities storing or utilizing this material should be equipped with an eyewash and a safety shower.
 Wash thoroughly after handling.
 No data available.

Section 9. Physical and Chemical Properties**9.1 Information on Basic Physical and Chemical Properties**

Physical States:	[] Gas	[] Liquid	[X] Solid
Appearance and Odor:	A solid		
pH:	No data.		
Melting Point:	No data.		
Boiling Point:	No data.		
Flash Pt:	No data.		
Evaporation Rate:	No data.		
Flammability (solid, gas):	No data available.		
Explosive Limits:	LEL: No data.	UEL: No data.	
Vapor Pressure (vs. Air or mm Hg):	No data.		
Vapor Density (vs. Air = 1):	No data.		
Specific Gravity (Water = 1):	No data.		
Solubility in Water:	No data.		
Solubility Notes:	Soluble in: MeOH (heated); chloroform (slightly);		
Octanol/Water Partition Coefficient:	No data.		
Autoignition Pt:	No data.		
Decomposition Temperature:	No data.		
Viscosity:	No data.		

9.2 Other Information

Percent Volatile:	No data.	
Molecular Formula & Weight:	C ₁₄ H ₉ Cl ₅	354.5

Section 10. Stability and Reactivity

10.1 Reactivity:	No data available.	
10.2 Stability:	Unstable []	Stable [X]
10.3 Stability Note(s):	Stable if stored in accordance with information listed on the product insert.	
Polymerization:	Will occur []	Will not occur [X]
10.4 Conditions To Avoid:	No data available.	
10.5 Incompatibility - Materials To Avoid:	iron and iron salts oxidizing agents	
10.6 Hazardous Decomposition or Byproducts:	carbon dioxide carbon monoxide hydrogen chloride gas	

Section 11. Toxicological Information

11.1 Information on Toxicological Effects: The toxicological effects of this product have not been thoroughly studied.
 p,p'-DDT - Toxicity Data: Oral LDLO (infant): 150 mg/kg; Oral TDLO (man): 6 mg/kg; Oral LD50 (rat): 87 mg/kg; Intraperitoneal LD50 (rat): 9100 ug/kg; Subcutaneous LD50 (rat): 1500 mg/kg; Intraperitoneal LD50 (mouse): 32 mg/kg;

Irritation or Corrosion:

Chronic Toxicological Effects: p,p'-DDT - Investigated as an agricultural chemical, mutagen, reproductive effector, and tumorigen. Only select Registry of Toxic Effects of Chemical Substances (RTECS) data is presented here. See actual entry in RTECS for complete information.
 p,p'-DDT RTECS Number: KJ3325000

Carcinogenicity: NTP? No IARC Monographs? No OSHA Regulated? No

CAS #	Hazardous Components (Chemical Name)	NTP	IARC	ACGIH	OSHA
50-29-3	DDT {1,1,1-Trichloro-2,2-bis(p-chlorophenyl)ethane; Clofenotane; 4,4-DDT; Dichlorodiphenyltrichloroethane}	Possible	2B	A3	n.a.

Section 12. Ecological Information

12.1 Toxicity: Avoid release into the environment.
 Runoff from fire control or dilution water may cause pollution.

12.2 Persistence and Degradability: No data available.

12.3 Bioaccumulative Potential: No data available.

12.4 Mobility in Soil: No data available.

12.5 Results of PBT and vPvB assessment: No data available.

12.6 Other adverse effects: No data available.

Section 13. Disposal Considerations

13.1 Waste Disposal Method: Dispose in accordance with local, state, and federal regulations.

Section 14. Transport Information

14.1 LAND TRANSPORT (US DOT):

DOT Proper Shipping Name: Toxic solid, organic, n.o.s. (p,p'-DDT)

DOT Hazard Class: 6.1 POISON

UN/NA Number: UN2811 **Packing Group:** III



14.1 LAND TRANSPORT (European ADR/RID):

ADR/RID Shipping Name: Toxic solid, organic, n.o.s. (p,p'-DDT)

UN Number: 2811 **Packing Group:** III

Hazard Class: 6.1 - POISON

14.3 AIR TRANSPORT (ICAO/IATA):

ICAO/IATA Shipping Name: Toxic solid, organic, n.o.s. (p,p'-DDT)
UN Number: 2811 **Packing Group:** III
Hazard Class: 6.1 - POISON **IATA Classification:** 6.1

Additional Transport Information: Transport in accordance with local, state, and federal regulations.
 When sold in quantities of less than or equal to 1 mL, or 1 g, with an Excepted Quantity Code of E1, E2, E4, or E5, this item meets the De Minimis Quantities exemption, per IATA 2.6.10.
 Therefore packaging does not have to be labeled as Dangerous Goods/Excepted Quantity.

Section 15. Regulatory Information

EPA SARA (Superfund Amendments and Reauthorization Act of 1986) Lists

CAS #	Hazardous Components (Chemical Name)	S. 302 (EHS)	S. 304 RQ	S. 313 (TRI)
50-29-3	DDT {1,1,1-Trichloro-2,2-bis(p-chlorophenyl)ethane; Clofenotane; 4,4-DDT; Dichlorodiphenyltrichloroethane}	No	Yes 1 LB	No

CAS #	Hazardous Components (Chemical Name)	Other US EPA or State Lists
50-29-3	DDT {1,1,1-Trichloro-2,2-bis(p-chlorophenyl)ethane; Clofenotane; 4,4-DDT; Dichlorodiphenyltrichloroethane}	CAA HAP,ODC: No; CWA NPDES: Yes; TSCA: Yes - Inventory, 5A(2), 12(b); CA PROP.65: Yes: Canc+RDTox(F/M)

Regulatory Information Statement: This SDS was prepared in accordance with 29 CFR 1910.1200 and Regulation (EC) No.1272/2008.

Section 16. Other Information

Revision Date: 07/27/2018

Additional Information About This Product: No data available.

Company Policy or Disclaimer: DISCLAIMER: This information is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes.

Material Safety Data Sheet

Ethylbenzene

ACC# 00596

Section 1 - Chemical Product and Company Identification

MSDS Name: Ethylbenzene**Catalog Numbers:** AC118080000, AC118080025, AC118080250, AC118080251, AC118085000, 11808-0010, O2751-1**Synonyms:** Ethylbenzol; Phenylethane.**Company Identification:**

Fisher Scientific
1 Reagent Lane
Fair Lawn, NJ 07410

For information, call: 201-796-7100**Emergency Number:** 201-796-7100**For CHEMTREC assistance, call:** 800-424-9300**For International CHEMTREC assistance, call:** 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
100-41-4	Ethylbenzene	>99	202-849-4

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: clear, colorless liquid. Flash Point: 15 deg C.

Warning! Flammable liquid and vapor. Causes eye, skin, and respiratory tract irritation. May be harmful if inhaled. Aspiration hazard if swallowed. Can enter lungs and cause damage. May cause central nervous system depression.

Target Organs: Central nervous system.**Potential Health Effects****Eye:** Causes severe eye irritation. Causes redness and pain.**Skin:** Causes skin irritation. Prolonged and/or repeated contact may cause irritation and/or dermatitis. May be absorbed through the skin. Causes redness and pain.**Ingestion:** May cause irritation of the digestive tract. May cause gastrointestinal irritation with nausea, vomiting and diarrhea. May cause central nervous system depression, characterized by excitement, followed by headache, dizziness, drowsiness, and nausea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure. Aspiration of material into the lungs may cause chemical pneumonitis, which may be fatal.**Inhalation:** Inhalation of high concentrations may cause central nervous system effects characterized by nausea, headache, dizziness, unconsciousness and coma. Causes respiratory tract irritation. Vapors may cause dizziness or suffocation.**Chronic:** Chronic inhalation may cause effects similar to those of acute inhalation.

Section 4 - First Aid Measures

Eyes: Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid immediately.

Skin: Get medical aid. Flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse.

Ingestion: Do not induce vomiting. If victim is conscious and alert, give 2-4 cupfuls of milk or water. Never give anything by mouth to an unconscious person. Get medical aid immediately.

Inhalation: Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: Treat symptomatically and supportively.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion. Use water spray to keep fire-exposed containers cool. Flammable liquid and vapor. Vapors are heavier than air and may travel to a source of ignition and flash back. Vapors can spread along the ground and collect in low or confined areas. This liquid floats on water and may travel to a source of ignition and spread fire. May accumulate static electricity.

Extinguishing Media: Use water spray, dry chemical, carbon dioxide, or appropriate foam.

Flash Point: 15 deg C (59.00 deg F)

Autoignition Temperature: 432 deg C (809.60 deg F)

Explosion Limits, Lower:1.2%

Upper: 6.8%

NFPA Rating: (estimated) Health: 2; Flammability: 3; Instability: 0

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks: Absorb spill with inert material (e.g. vermiculite, sand or earth), then place in suitable container. Remove all sources of ignition. Provide ventilation. Control runoff and isolate discharged material for proper disposal. Use water spray to cool and disperse vapors and protect personnel.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation. Ground and bond containers when transferring material. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Keep container tightly closed. Keep away from heat, sparks and flame. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames. Avoid breathing vapor or mist.

Storage: Keep away from sources of ignition. Store in a tightly closed container. Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate general or local exhaust ventilation to keep airborne concentrations below the permissible exposure limits.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs

Ethylbenzene	100 ppm TWA; 125 ppm STEL	100 ppm TWA; 435 mg/m ³ TWA 800 ppm IDLH	100 ppm TWA; 435 mg/m ³ TWA
--------------	---------------------------	-----------------------------------------------------	----------------------------------------

OSHA Vacated PELs: Ethylbenzene: 100 ppm TWA; 435 mg/m³ TWA

Personal Protective Equipment

Eyes: Wear chemical splash goggles.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Section 9 - Physical and Chemical Properties

Physical State: Liquid

Appearance: clear, colorless

Odor: aromatic odor

pH: Not available.

Vapor Pressure: 9.6 mm Hg @ 25 deg C

Vapor Density: 3.7 (air=1)

Evaporation Rate: <1 (butyl acetate=1)

Viscosity: 0.63 mPa s 20 C

Boiling Point: 136 deg C

Freezing/Melting Point: -95 deg C

Decomposition Temperature: Not available.

Solubility: Insoluble.

Specific Gravity/Density: 0.86

Molecular Formula: C₈H₁₀

Molecular Weight: 106.17

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.

Conditions to Avoid: Ignition sources, excess heat.

Incompatibilities with Other Materials: Strong oxidizing agents.

Hazardous Decomposition Products: Carbon monoxide, carbon dioxide.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#:

CAS# 100-41-4: DA0700000

LD50/LC50:

CAS# 100-41-4:

Draize test, rabbit, eye: 500 mg Severe;

Inhalation, mouse: LC50 = 35500 mg/m³/2H;

Inhalation, rat: LC50 = 55000 mg/m³/2H;

Oral, rat: LD50 = 3500 mg/kg;

Oral, rat: LD50 = 3500 mg/kg;

Skin, rabbit: LD50 = 17800 uL/kg;

Inhalation rat LC50: 17.2 mg/l/4H from BASF.

Carcinogenicity:

CAS# 100-41-4:

- **ACGIH:** A3 - Confirmed animal carcinogen with unknown relevance to humans
- **California:** carcinogen, initial date 6/11/04
- **NTP:** Not listed.
- **IARC:** Group 2B carcinogen

Epidemiology: No information found

Teratogenicity: No information found

Reproductive Effects: No information found

Mutagenicity: Mutation in mammalian somatic cells(Rodent,mouse) Lymphocyte = 80 mg/L.

Neurotoxicity: No information found

Other Studies:

Section 12 - Ecological Information

Ecotoxicity: Fish: Rainbow trout: LC50 = 14.0 mg/L; 96 Hr.; Static Bioassay Fish: Fathead Minnow: LC50 = 12.1 mg/L; 96 Hr.; Flow-through Bioassay Fish: Bluegill/Sunfish: LC50 = 150.0 mg/L; 96 Hr.; Static Bioassay, pH 6.5-7.9, 21-23 degrees C Water flea EC50 = 2.1 mg/L; 48 Hr.; Static Bioassay Water flea EC50 = 75.0 mg/L; 48 Hr.; Static Bioassay Shrimp (mysidoposis bahia), LC50=87.6 mg/L/96hr. Sheepshead minnow LC50=275 mg/L/96hr. Fathead minnow LC50=42.3 mg/L/96hr in hard water & 48.5 mg/L/96hr in softwater.

Environmental: Experimental data on the bioconcentration of ethylbenzene include a log BCF of 1.9 in goldfish and the log BCF of 0.67 for clams exposed to the water-soluble fraction of crude oil. Using its octanol/water partition coefficient (log Kow= 3.15) and using a recommended regression equation, one can calculate a log BCF in fish of 2.16 indicating that ethylbenzene should not significantly bioconcentrate in aquatic organisms. Ethylbenzene has a moderate adsorption for soil. The measured Koc for silt loam was 164

Physical: The predominant photochemical reaction of ethylbenzene in the atmosphere is with hydroxyl radicals; the tropospheric half-life for this reaction is 5.5 and 24 hr in the summer and winter, actively. Degradation is somewhat faster under photochemical smog situations. Photooxidation products which have been identified include ethylphenol, benzaldehyde, acetophenone and m- and p-ethylnitrobenzene. Ethylbenzene is resistant to hydrolysis. Ethylbenzene does not significantly absorb light above 290 nm in methanol solution.

Other: No information available.

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed.

RCRA U-Series: None listed.

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	ETHYLBENZENE	ETHYLBENZENE
Hazard Class:	3	3
UN Number:	UN1175	UN1175
Packing Group:	II	II
Additional Info:		FLASHPOINT 15 C

Section 15 - Regulatory Information

US FEDERAL

TSCA

CAS# 100-41-4 is listed on the TSCA inventory.

Health & Safety Reporting List

CAS# 100-41-4: Effective 6/19/87, Sunset 6/19/97

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

CAS# 100-41-4: 1000 lb final RQ; 454 kg final RQ

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPQ.

SARA Codes

CAS # 100-41-4: immediate, delayed, fire.

Section 313

This material contains Ethylbenzene (CAS# 100-41-4, >99%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

Clean Air Act:

CAS# 100-41-4 is listed as a hazardous air pollutant (HAP).

This material does not contain any Class 1 Ozone depleters.

This material does not contain any Class 2 Ozone depleters.

Clean Water Act:

CAS# 100-41-4 is listed as a Hazardous Substance under the CWA. CAS# 100-41-4 is listed as a Priority Pollutant under the Clean Water Act. CAS# 100-41-4 is listed as a Toxic Pollutant under the Clean Water Act.

OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

CAS# 100-41-4 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

California Prop 65

The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act:

WARNING: This product contains Ethylbenzene, a chemical known to the state of California to cause cancer. California No Significant Risk Level: None of the chemicals in this product are listed.

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols:

XN F

Risk Phrases:

R 11 Highly flammable.

R 20 Harmful by inhalation.

Safety Phrases:

S 16 Keep away from sources of ignition - No smoking.

S 24/25 Avoid contact with skin and eyes.

S 29 Do not empty into drains.

WGK (Water Danger/Protection)

CAS# 100-41-4: 1

Canada - DSL/NDSL

CAS# 100-41-4 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of B2, D2B, D2A.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

CAS# 100-41-4 is listed on the Canadian Ingredient Disclosure List.

Section 16 - Additional Information

MSDS Creation Date: 4/28/1999

Revision #6 Date: 11/29/2007

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.

SAFETY DATA SHEET

Creation Date 24-Nov-2010

Revision Date 19-Jan-2018

Revision Number 3

1. Identification

Product Name Manganese, powder, -325 mesh

Cat No. : AC317440000; AC317440010; AC317442500

CAS-No 7439-96-5
Synonyms No information available

Recommended Use Laboratory chemicals.
Uses advised against Food, drug, pesticide or biocidal product use.
Details of the supplier of the safety data sheet

Company

Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable solids	Category 2
Serious Eye Damage/Eye Irritation	Category 2

Label Elements

Signal Word

Warning

Hazard Statements

Flammable solid
Causes serious eye irritation

**Precautionary Statements****Prevention**

Wash face, hands and any exposed skin thoroughly after handling
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking
 Ground/bond container and receiving equipment
 Use explosion-proof electrical/ventilating/lighting/equipment
 Wear protective gloves/protective clothing/eye protection/face protection

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
 If eye irritation persists: Get medical advice/attention

Fire

In case of fire: Use CO₂, dry chemical, or foam for extinction

Hazards not otherwise classified (HNOC)

None identified

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Manganese	7439-96-5	>95

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get medical attention.
Skin Contact	Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes. Get medical attention.
Inhalation	Remove from exposure, lie down. Remove to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. Get medical attention.
Ingestion	Clean mouth with water. Get medical attention.
Most important symptoms and effects	No information available.
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Dry chemical.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	No information available
Explosion Limits	No information available

Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Combustible material.

Hazardous Combustion Products

None known.

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
2	2	0	N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment as required.
Environmental Precautions	See Section 12 for additional Ecological Information.

Methods for Containment and Clean Up	Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment. Sweep up and shovel into suitable containers for disposal.
---------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------

7. Handling and storage

Handling	Avoid contact with skin and eyes. Do not breathe dust. Use spark-proof tools and explosion-proof equipment. Use only non-sparking tools.
-----------------	------------------------------------------------------------------------------------------------------------------------------------------

Storage	Keep in a dry, cool and well-ventilated place. Refer product specification and/or product label for specific storage temperature requirement. Keep container tightly closed. Keep away from heat, sparks and flame. Keep under nitrogen.
----------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

8. Exposure controls / personal protection**Exposure Guidelines**

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Manganese	TWA: 0.02 mg/m ³ TWA: 0.1 mg/m ³	(Vacated) TWA: 1 mg/m ³ Ceiling: 5 mg/m ³ (Vacated) STEL: 3 mg/m ³ (Vacated) Ceiling: 5 mg/m ³	IDLH: 500 mg/m ³ TWA: 1 mg/m ³ STEL: 3 mg/m ³	TWA: 0.2 mg/m ³ TWA: 1 mg/m ³

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: NIOSH - National Institute for Occupational Safety and Health

Engineering Measures	Ensure adequate ventilation, especially in confined areas.
-----------------------------	------------------------------------------------------------

Personal Protective Equipment

Eye/face Protection	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
Skin and body protection	Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection	No protective equipment is needed under normal use conditions.
Hygiene Measures	Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder Solid
Appearance	Dark brown
Odor	No information available
Odor Threshold	No information available
pH	No information available
Melting Point/Range	1260 °C / 2300 °F
Boiling Point/Range	1900 °C / 3452 °F
Flash Point	No information available
Evaporation Rate	Not applicable
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	No information available
Vapor Density	Not applicable
Specific Gravity	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	Not applicable
Molecular Formula	Mn
Molecular Weight	54.94

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Moisture sensitive.
Conditions to Avoid	Incompatible products. Exposure to moisture.
Incompatible Materials	Acids, Bases, Halogens
Hazardous Decomposition Products	None under normal use conditions
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Manganese	LD50 = 9 g/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Manganese	7439-96-5	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known
STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Manganese	Not listed	LC50: > 3.6 mg/L, 96h semi-static (Oncorhynchus mykiss)	Not listed	Not listed

Persistence and Degradability Insoluble in water

Bioaccumulation/ Accumulation No information available.

Mobility Is not likely mobile in the environment due its low water solubility.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN3089
Proper Shipping Name Metal powder, flammable, n.o.s.
Technical Name Manganese
Hazard Class 4.1
Packing Group III

TDG

UN-No UN3089
Proper Shipping Name Metal powder, flammable, n.o.s.
Hazard Class 4.1
Packing Group III

IATA

UN-No UN3089
 Proper Shipping Name Metal powder, flammable, n.o.s.
 Hazard Class 4.1
 Packing Group III

IMDG/IMO

UN-No UN3089
 Proper Shipping Name Metal powder, flammable, n.o.s.
 Hazard Class 4.1
 Packing Group III

15. Regulatory information**United States of America Inventory**

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Manganese	7439-96-5	X	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Manganese	7439-96-5	X	-	231-105-1	X	X	X	X	KE-22999

U.S. Federal Regulations**SARA 313**

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Manganese	7439-96-5	>95	1.0

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Manganese	X		-

OSHA - Occupational Safety and Health Administration Not applicable

CERCLA Not applicable

California Proposition 65 This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Manganese	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date 24-Nov-2010

Revision Date 19-Jan-2018

Print Date 19-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

SAFETY DATA SHEET

1. SUBSTANCE AND SOURCE IDENTIFICATION

Product Identifier

SRM Number: 3079
SRM Name: Aroclor 1254 in Transformer Oil
Other Means of Identification: Not Applicable.

Recommended Use of This Material and Restrictions of Use

This Standard Reference Material (SRM) is a solution of Aroclor 1254 in transformer oil. This SRM is intended primarily for calibrating chromatographic instrumentation and methods of analysis used for the determination of Aroclor 1254 and polychlorinated biphenyls (PCBs) in transformer oil. A unit of SRM 3079 consists of five 2 mL ampoules, each containing approximately 1.2 mL of transformer oil.

Company Information

National Institute of Standards and Technology
 Standard Reference Materials Program
 100 Bureau Drive, Stop 2300
 Gaithersburg, Maryland 20899-2300

Telephone: 301-975-2200
 FAX: 301-948-3730
 E-mail: SRMMSDS@nist.gov
 Website: <http://www.nist.gov/srm>

Emergency Telephone ChemTrec:
 1-800-424-9300 (North America)
 +1-703-527-3887 (International)

2. HAZARDS IDENTIFICATION

Classification

Physical Hazard: Not classified.
Health Hazard: Carcinogenicity Category 1B
 Reproductive Toxicity Category 2
 Aspiration Hazard Category 1

Label Elements

Symbol



Signal Word

DANGER

Hazard Statement(s)

H304 May be fatal if swallowed and enters airways.
 H350 May cause cancer <inhalation, ingestion>.
 H361 Suspected of damaging fertility or the unborn child.

Precautionary Statement(s):

P201 Obtain special instructions before use.
 P202 Do not handle until all safety precautions have been read and understood.
 P280 Wear protective gloves, protective clothing, and eye protection.
 P308+P313 If exposed or concerned: Get medical attention.
 P301+P310 If swallowed: Immediately call a doctor.
 P331 Do NOT induce vomiting.
 P405 Store locked up.
 P501 Dispose of contents and container according to local regulations.

Hazards Not Otherwise Classified: Not applicable.

Ingredients(s) with Unknown Acute Toxicity: Not applicable.

3. COMPOSITION AND INFORMATION ON HAZARDOUS INGREDIENTS

Substance: Aroclor 1254 in transformer oil.

Other Designations:

Transformer oil (hydrotreated light naphthenic distillate (petroleum), hydraulic petroleum oil, distillates, petroleum).

Aroclor 1254 (PCB 1254; chlorodiphenyl (54% Cl); polychlorinated biphenyl; chlorobiphenyls; PCB; PCBs)

Components are listed in compliance with OSHA 29 CFR 1910.1200.

Hazardous Component(s)	CAS Number	EC Number (EINECS)	Nominal Mass Concentration (%)
Transformer oil	64742-53-6	265-156-6	>99
Aroclor 1254	11097-69-1	215-648-1 ^(a)	0.3

^(a) EC Number as PCB, polychlorinated biphenyl

4. FIRST AID MEASURES

Description of First Aid Measures:

Inhalation: If adverse effects occur, remove to uncontaminated area. If not breathing, give artificial respiration or oxygen by qualified personnel. Seek immediate medical attention.

Skin Contact: Wash exposed skin with soap and water for at least 15 minutes. Seek medical attention if needed.

Eye Contact: Immediately flush eyes, including under the eyelids with copious amounts of water for at least 15 minutes. Seek immediate medical attention.

Ingestion: Aspiration hazard. Do not induce vomiting. If vomiting occurs, keep head lower than hips to prevent aspiration. If not breathing, give artificial respiration by qualified personnel. Seek immediate medical attention.

Most Important Symptoms/Effects, Acute and Delayed: Irritation, dizziness, nausea, coughing, and aspiration.

Indication of any immediate medical attention and special treatment needed, if necessary: Not applicable.

5. FIRE FIGHTING MEASURES

Fire and Explosion Hazards: Slight fire hazard. See Section 9, "Physical and Chemical Properties" for flammability properties.

Extinguishing Media:

Suitable: Regular dry chemical, carbon dioxide, regular foam.

Unsuitable: Straight streams of water.

Specific Hazards Arising from the Chemical: None listed.

Special Protective Equipment and Precautions for Fire-Fighters: Avoid inhalation of material or combustion byproducts. Wear full protective clothing and NIOSH approved self-contained breathing apparatus (SCBA).

NFPA Ratings (0 = Minimal; 1 = Slight; 2 = Moderate; 3 = Serious; 4 = Severe)

Health = 2

Fire = 1

Reactivity = 0

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures: Use suitable protective equipment; see Section 8, "Exposure Controls and Personal Protection".

Methods and Materials for Containment and Clean up: Absorb spilled material with sand or non-combustible material and collect in appropriate container for disposal. Keep out of water supplies and sewers.

7. HANDLING AND STORAGE

Safe Handling Precautions: See Section 8, “Exposure Controls and Personal Protection”.

Storage: Store and handle in accordance with all current regulations and standards. The storage floor must be impermeable and form a collecting basin so that, in the event of an accident spillage, the liquid cannot spread beyond the storage area.

8. EXPOSURE CONTROLS AND PERSONAL PROTECTION

Exposure Limits:

Transformer oil: No occupational exposure limits established.

Aroclor 1254: NIOSH (TWA): 0.001 mg/m³ (related to 1,1'-Biphenyl, chloro derivatives)

Engineering Controls: Provide local exhaust or process enclosure ventilation system. Ensure compliance with applicable exposure limits.

Personal Protection Measures: In accordance with OSHA 29 CFR 1910.132, subpart I, wear appropriate Personal Protective Equipment (PPE) to minimize exposure to this material.

Respiratory Protection: If workplace conditions warrant a respirator, a respiratory protection program that meets OSHA 29CFR 1910.134 must be followed. Refer to NIOSH 42 CFR 84 for applicable certified respirators.

Eye/Face Protection: Wear splash resistant safety goggles with a face shield. An eye wash station should be readily available near areas of use.

Skin and Body Protection: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. Chemical-resistant gloves should be worn at all times when handling chemicals.

9. PHYSICAL AND CHEMICAL PROPERTIES

Descriptive Properties

Appearance (physical state, color, etc.):	Transformer oil (>99 %) clear, yellow liquid
Molecular Formula:	not applicable
Molar Mass (g/mol):	not applicable
Odor:	not available
Odor threshold:	not available
pH:	not available
Evaporation rate:	not available
Melting point/freezing point:	-55 °C (-67 °F)
Pour point:	-40 °C (-40 °F)
Density:	0.8912 g/mL at 22 °C ^(b)
Vapor Pressure:	0.1 mmHg 20 °C ^(a)
Vapor Density (air = 1):	>5 at 101 kPa ^(a)
Kinematic Viscosity:	12 cSt (12 mm ² /s) at 40 °C
Solubility(ies):	insoluble in water
Partition coefficient (n-octanol/water):	>6.5 ^(a)

Thermal Stability Properties

Autoignition Temperature:	>315 °C (599 °F) ^(a)
Thermal Decomposition:	not available
Initial boiling point and boiling range:	260 °C to 371 °C (500 °F to 700 °F)
Explosive Limits, LEL:	not available
Explosive Limits, UEL:	not available
Flash Point:	>145 °C (293 °F) ^(a)
Flammability (solid, gas):	not applicable

^(a) Physical property listed in the NIST Certificate of Analysis. Values are not certified.

^(b) Vendor supplied health and safety information.

10. STABILITY AND REACTIVITY

Reactivity: Stable at normal temperatures and pressure.

Stability: Stable Unstable

Possible Hazardous Reactions: None listed.

Conditions to Avoid: Avoid excessive heat; high energy ignition sources.

Incompatible Materials: Oxidizers.

Fire/Explosion Information: See Section 5, "Fire Fighting Measures".

Hazardous Decomposition: Oxides of carbon, sulfur oxides, aldehydes.

Hazardous Polymerization: Will Occur Will Not Occur

11. TOXICOLOGICAL INFORMATION

Route of Exposure: Inhalation Skin Ingestion

Symptoms Related to the Physical, Chemical and Toxicological Characteristics: Dizziness, nausea, coughing.

Potential Health Effects (Acute, Chronic and Delayed):

Inhalation: Acute exposure to high levels of vapor from transformer oil may cause central nervous system depression, headache, dizziness, nausea, vomiting, anorexia, incoordination and unconsciousness. Prolonged or repeated exposure may cause irritation. Short term exposure to Aroclor 1254 may cause irritation or liver damage; long term exposure may cause rash, itching, hair loss, digestive issues, headache, dizziness, impotence, coma, and cancer.

Skin Contact: Short term and long term contact with transformer oil may cause skin irritation and dermatitis. Short-term exposure to Aroclor 1254 may cause skin irritation or liver damage; long term exposure to Aroclor 1254 may cause same effects as for inhalation, plus hair loss and reproductive effects.

Eye Contact: Acute exposure of liquid or vapor may cause irritation.

Ingestion: Acute ingestion of transformer oil may cause abdominal pain, nausea, and vomiting. Small amounts of oil aspirated during ingestion or vomiting may cause lung damage; no information available for long-term exposure to transformer oil. Short term exposure to Aroclor 1254 may cause liver damage; long term exposure to Aroclor 1254 may cause same effects as for inhalation, plus hyperactivity, menstrual disorders, reproductive effects.

Numerical Measures of Toxicity:

Acute Toxicity: Not classified.

Component: Transformer oil

Rat, Oral LD50: >5000 mg/kg

Rat, Inhalation LC50: 2180 mg/m³ (4 h)

Rabbit, Skin LD50: >2000 mg/kg

Component: Aroclor 1254

Rat, Oral LD50: 1010 mg/kg

Skin Corrosion/Irritation: Not classified.

Transformer oil, Rabbit, skin: 0.5 mL/24 h, moderate

Serious Eye Damage/ Eye Irritation: Not classified.

Transformer oil, Rabbit, eye: 0.1 mL, mild

Respiratory Sensitization: No data available; not classified.

Skin Sensitization: No data available; not classified.

Germ Cell Mutagenicity: No data available; not classified.

Carcinogenicity: Category 1B

Listed as a Carcinogen/Potential Carcinogen X Yes No

Transformer oil is not listed by NTP, IARC, or OSHA as a carcinogen/potential carcinogen.

Aroclor 1254 is listed by NTP as *reasonably anticipated to be a human carcinogen* (as PCB, polychlorinated biphenyl, CAS number 1336-36-3) and by IARC as Group 1, *carcinogenic to humans* (related to Polychlorinated biphenyls).

Reproductive Toxicity: Category 2

Aroclor 1254: Overexposure has resulted in decreased birth weight in offspring of exposed mothers. Significant exposure to PCBs that reach the fetus can cause teratogenic effects.

Oral Mammal TDLo - species unspecified: 14 mg/kg, prior to copulation 30 day(s)

STOT, Single Exposure: No data available; not classified.

STOT, Repeated Exposure: Not classified; this SRM contains less than 1 % of Archlor 1254, a Category 2 target organ toxicant.

Aspiration Hazard: Category 1

Transformer oil is a human aspiration toxicity hazard.

12. ECOLOGICAL INFORMATION

Ecotoxicity Data:

Transformer oil: Fish, Rainbow Trout (*Oncorhynchus mykiss*) LC50: >5000 mg/L (96 h)

Invertebrate, Water flea (*Daphnia magna*) EC50: >1000 mg/L (48 h)

Aroclor 1254: No data available.

Persistence and Degradability: Has the potential to biodegradable.

Bioaccumulative Potential: No data available

Mobility in Soil: Expected to migrate from land to water and vice versa.

Other Adverse effects: Keep out of water supplies.

13. DISPOSAL CONSIDERATIONS

Waste Disposal: Dispose of waste in accordance with all applicable federal, state, and local regulations.

14. TRANSPORTATION INFORMATION

U.S. DOT and IATA: This material is not regulated by IATA or DOT.

15. REGULATORY INFORMATION

U.S. Regulations:

CERCLA Sections 102a/103 (40 CFR 302.4): Aroclor 1254, 1 lb. (0.454 kg) final RQ.

SARA Title III Section 302 (40 CFR 355.30): Not regulated.

SARA Title III Section 304 (40 CFR 355.40): Not regulated.

SARA Title III Section 313 (40 CFR 372.65): Aroclor 1254, 0.1 % supplier notification limit (related or polychlorinated biphenyls).

OSHA Process Safety (29 CFR 1910.119): Not regulated.

SARA Title III Sections 311/312 Hazardous Categories (40 CFR 370.21):

ACUTE HEALTH:	Yes.
CHRONIC HEALTH:	Yes.
FIRE:	No.
REACTIVE:	No.
PRESSURE:	No.

State Regulations:

California Proposition 65:

WARNING! This product contains a chemical (Aroclor 1254, related to PCBs) known to the state of California to cause cancer, reproductive, and/or developmental effects.

U.S. TSCA Inventory: Transformer oil is listed.

TSCA 12(b), Export Notification: Aroclor 1254 is listed in Section 6, 50 ppm de minimis concentration (see 40 CFR 761, related to polychlorinated biphenyls).

Canadian Regulations:

WHMIS Information: Not provided for this material.

16. OTHER INFORMATION

Issue Date: 27 May 2015

Sources: ChemADVISOR, Inc., SDS, *Aroclor 1254*, 20 March 2015.

ChemADVISOR, Inc., SDS, *Transformer Oil*, 20 March 2015.

Vendor MSDS, Exxon Mobile Corporation, UNIVOLT N 61 B, 30 May 2014.

Key of Acronyms:

ACGIH	American Conference of Governmental Industrial Hygienists	NRC	Nuclear Regulatory Commission
ALI	Annual Limit on Intake	NTP	National Toxicology Program
CAS	Chemical Abstracts Service	OSHA	Occupational Safety and Health Administration
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act	PEL	Permissible Exposure Limit
CFR	Code of Federal Regulations	RCRA	Resource Conservation and Recovery Act
DOT	Department of Transportation	REL	Recommended Exposure Limit
EINECS	European Inventory of Existing Commercial Chemical Substances	RQ	Reportable Quantity
EPCRA	Emergency Planning and Community Right-to-Know Act	RTECS	Registry of Toxic Effects of Chemical Substances
IARC	International Agency for Research on Cancer	SARA	Superfund Amendments and Reauthorization Act
IATA	International Air Transportation Agency	SCBA	Self-Contained Breathing Apparatus
IDLH	Immediately Dangerous to Life and Health	RM	Reference Material
LC50	Lethal Concentration	STEL	Short Term Exposure Limit
LD50	Median Lethal Dose or Lethal Dose, 50 %	STOT	Specific Target Organ Toxicity
LEL	Lower Explosive Limit	TLV	Threshold Limit Value
MSDS	Material Safety Data Sheet	TPQ	Threshold Planning Quantity
NFPA	National Fire Protection Association	TSCA	Toxic Substances Control Act
NIOSH	National Institute for Occupational Safety and Health	TWA	Time Weighted Average
NIST	National Institute of Standards and Technology	UEL	Upper Explosive Limit
		WHMIS	Workplace Hazardous Materials Information System

Disclaimer: Physical and chemical data contained in this SDS are provided only for use in assessing the hazardous nature of the material. The SDS was prepared carefully, using current references; however, NIST does not certify the data in the SDS. The certified values for this material are given in the NIST Certificate of Analysis.

Users of this SRM should ensure that the SDS in their possession is current. This can be accomplished by contacting the SRM Program: telephone (301) 975-2200; fax (301) 948-3730; e-mail srmmsds@nist.gov; or via the Internet at <http://www.nist.gov/srm>.

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.31.2015

Page 1 of 8

Xylenes, Reagent Grade

SECTION 1: Identification of the substance/mixture and of the supplier

Product name: Xylenes, Reagent Grade

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: S25629

Recommended uses of the product and restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific, Inc
9 Barnhart Drive, Hanover, PA 17331
(717) 632-1291

Supplier Details:

Fisher Science Education
6771 Silver Crest Road, Nazareth, PA 18064
(724)517-1954

Emergency telephone number:

Fisher Science Education
Emergency Telephone No.: 800-535-5053

SECTION 2: Hazards identification

Classification of the substance or mixture:



Flammable

Flammable liquids, category 3



Irritant

Acute toxicity (oral, dermal, inhalation), category 4
Skin irritation, category 2



Environmentally Damaging

Chronic hazards to the aquatic environment, category 2

Acute hazards to the aquatic environment, category 2

Flam. Liq. 3.

Acute inhalation tox. 4.

Acute Dermal Tox. 4.

Skin Irrit. 2.

Aquatic Acute 2.

Aquatic Chronic 2.

Signal word: Warning

Hazard statements:

Flammable liquid and vapour.

Harmful in contact with skin.

Harmful if inhaled.

Causes skin irritation.

Toxic to aquatic life with long lasting effects.

Precautionary statements:

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.31.2015

Page 2 of 8

Xylenes, Reagent Grade


If medical advice is needed, have product container or label at hand.
Keep out of reach of children.
Read label before use.
Keep away from heat/sparks/open flames/hot surfaces. No smoking.
Avoid release to the environment.
Wear protective gloves/protective clothing/eye protection/face protection.
Keep container tightly closed.
Ground/bond container and receiving equipment.
Use explosion-proof electrical/ventilating/light/equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.
Avoid breathing dust/fume/gas/mist/vapours/spray.
Wash skin thoroughly after handling.
Use only outdoors or in a well-ventilated area.
IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
Call a POISON CENTER or doctor/physician if you feel unwell.
Specific measures (see supplemental first aid instructions on this label).
If skin irritation occurs: Get medical advice/attention.
Take off contaminated clothing and wash before reuse.
In case of fire: Use agents recommended in section 5 for extinction.
Collect spillage.
Store in a well ventilated place. Keep cool.
Dispose of contents and container to an approved waste disposal plant.

Other Non-GHS Classification:

WHMIS



NFPA/HMIS



NFPA SCALE (0-4)

Health	2
Flammability	3
Physical Hazard	0
Personal Protection	X

HMIS RATINGS (0-4)

Xylenes, Reagent Grade

Ingredients:

CAS 1330-20-7	Xylenes	100 %
Percentages are by weight		

SECTION 4: First aid measures

Description of first aid measures

After inhalation:

Move exposed to fresh air. Give artificial respiration if necessary. If breathing is difficult give oxygen. Loosen clothing and place exposed in a comfortable position. Seek medical assistance if cough or other symptoms appear.

After skin contact:

Wash hands and exposed skin with soap and plenty of water. Seek medical attention if irritation persists or if concerned.

After eye contact:

Protect unexposed eye. Flush exposed eye gently using water for 15-20 minutes. Remove contact lenses while rinsing. Seek medical attention if irritation persists or concerned.

After swallowing:

Rinse mouth with water. Do not induce vomiting. Never give anything by mouth to an unconscious person. Seek medical attention if irritation, discomfort, or vomiting persists.

Most important symptoms and effects, both acute and delayed:

Irritation. Shortness of breath. Headache. Nausea. Dizziness. Blurred vision. Prolonged or repeated exposure to skin causes defatting and dermatitis.

Indication of any immediate medical attention and special treatment needed:

If seeking medical attention provide SDS document to physician. Physician should treat symptomatically.

SECTION 5: Firefighting measures

Extinguishing media

Suitable extinguishing agents:

Use dry chemical, chemical foam, carbon dioxide, or alcohol-resistant foam. Use appropriate foam to blanket release and suppress vapors.

Unsuitable extinguishing agents:

Water may be ineffective.

Special hazards arising from the substance or mixture:

Thermal decomposition can lead to release of irritating gases and vapors. Containers may explode when heated. Vapors may travel to sources of ignition. Vapors may form explosive mixtures with air. Vapors may form an explosive mixture with air. Vapors are heavier than air and may travel to a source of ignition and flash back. Vapors can spread along the ground and collect in low or confined areas. This liquid floats on water and may travel to a source of ignition and spread fire. May accumulate static electricity.

Advice for firefighters:

Protective equipment:

Wear protective eyewear, gloves, and clothing. Refer to Section 8.

Additional information (precautions):

Avoid inhaling gases, fumes, dust, mist, vapor, and aerosols. Avoid contact with skin, eyes, and clothing. Cool closed containers exposed to fire with water spray.

Xylenes, Reagent Grade

SECTION 6: Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Ensure adequate ventilation. Ensure that air-handling systems are operational. Remove all sources of ignition.

Environmental precautions:

Should not be released into environment. Prevent from reaching drains, sewer, or waterway.

Methods and material for containment and cleaning up:

Wear protective eyewear, gloves, and clothing. Refer to Section 8. Always obey local regulations. If necessary use trained response staff or contractor. Evacuate personnel to safe areas. Containerize for disposal. Refer to Section 13. Keep in suitable closed containers for disposal. Remove source from ignition. Absorb with inert material and place in chemical waste container. Ventilate spill area. Have extinguishing agent available in case of fire. Eliminate all ignition sources. Stop or control the leak, if this can be done without undue risk. Use appropriate foam to blanket release and suppress vapors. Control runoff and isolate discharged material for proper disposal.

Reference to other sections: None

SECTION 7: Handling and storage

Precautions for safe handling:

Avoid contact with skin, eyes, and clothing. Follow good hygiene procedures when handling chemical materials. Refer to Section 8. Follow proper disposal methods. Refer to Section 13. Do not eat, drink, smoke, or use personal products when handling chemical substances. Keep away from open flames, sources of ignition, hot surfaces. Use explosion-proof equipment and non-sparking tools.

Conditions for safe storage, including any incompatibilities:

Store in a cool location. Keep away from food and beverages. Protect from freezing and physical damage. Provide ventilation for containers. Keep container tightly sealed. Store away from incompatible materials. Store as flammable. Keep away from open flames, hot surfaces and sources of ignition.

SECTION 8: Exposure controls/personal protection



Control Parameters:

1330-20-7, Xylenes, ACGIH TLV TWA 435 mg/m³.
1330-20-7, Xylenes (o-, m-, p- isomers), OSHA PEL 100 ppm TWA; 435 mg/m³ TWA.

Appropriate Engineering controls:

Emergency eye wash fountains and safety showers should be available in the immediate vicinity of use or handling. Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor and mists below the applicable workplace exposure limits (Occupational Exposure Limits-OELs) indicated above. Use under a chemical fume hood.

Respiratory protection:

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. When necessary use NIOSH approved breathing equipment.

Protection of skin:

Select glove material impermeable and resistant to the substance. Select glove material based on rates of diffusion and degradation. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Use proper glove removal technique without touching outer surface. Avoid skin contact with used gloves. Wear protective clothing.

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.31.2015

Page 5 of 8

Xylenes, Reagent Grade

Eye protection: Wear equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU). Safety glasses or goggles are appropriate eye protection.

General hygienic measures: Perform routine housekeeping. Wash hands before breaks and immediately after handling the product. Avoid contact with skin, eyes, and clothing. Before reworking wash contaminated clothing. Work clothing that becomes wet should be immediately removed due to its flammability hazard.

SECTION 9: Physical and chemical properties

Appearance (physical state, color):	Clear, colorless liquid	Explosion limit lower: Explosion limit upper:	0.9% (V) 6.7% (V)
Odor:	Sweet Aromatic	Vapor pressure at 20°C:	8 mbar @20C
Odor threshold:	0.05 ppm	Vapor density:	3.67
pH-value:	Not Determined	Relative density:	0.86 g/mL at 25 °C (77 °F)
Melting/Freezing point:	-34C	Solubilities:	Soluble in most organic solvents.
Boiling point/Boiling range:	137 - 140 °C (279 - 284 °F)	Partition coefficient (n-octanol/water):	log Kow 3.12
Flash point (closed cup):	25 °C (77 °F)	Auto/Self-ignition temperature:	460C
Evaporation rate:	Not determined	Decomposition temperature:	Not Determined
Flammability (solid, gaseous):	flammable liquid	Viscosity:	a. Kinematic: Not determined b. Dynamic: Not Determined
Density at 20°C:	Not Determined		

SECTION 10: Stability and reactivity

Reactivity:

Nonreactive under normal conditions.

Chemical stability:

Stable under normal conditions.

Possible hazardous reactions:

None under normal processing. Vapours may form explosive mixture with air.

Conditions to avoid:

Incompatible materials. Ignition sources. excess heat. Open Flames. Hot surfaces.

Incompatible materials:

Oxidizing agents. Acids.

Hazardous decomposition products:

Carbon oxides.

SECTION 11: Toxicological information

Acute Toxicity:

Oral:

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.31.2015

Page 6 of 8

Xylenes, Reagent Grade

1330-20-7 (Xylenes) LD50 Rat: 4,300 mg/kg

Dermal:

1330-20-7 (Xylenes) LD50 Rabbit: >1,700 mg/kg

Inhalation:

1330-20-7 (Xylenes) LD50 Rat: 5000 ppm - 4h

Chronic Toxicity: No additional information.

Corrosion Irritation:

Dermal:

1330-20-7 (Xylenes) Rabbit: Skin Irritation - 24 h

Ocular:

1330-20-7 (Xylenes) Rabbit: mild eye irritation

Sensitization: No additional information.

Numerical Measures: No additional information.

Carcinogenicity:

IARC:: Group 3: Not classifiable as to its carcinogenicity to humans (Xylene)

NTP (National Toxicology Program) : Evidence of Carcinogenicity - Male Rat - No Evidence; Female Rat - No Evidence; Male Mice - No Evidence; Female Mice - No Evidence (TR-327, mixed) (Xylenes 1330-20-7)

ACGIH - A4 -: Not Classifiable as a Human Carcinogen Xylene (o-, m-, p- isomers) 1330-20-7

Mutagenicity: No additional information.

Reproductive Toxicity: No additional information.

SECTION 12: Ecological information

Ecotoxicity: No additional information.

Persistence and degradability:

Readily biodegradable.

Bioaccumulative potential:

potential for bioconcentration in aquatic organisms is low.

Mobility in soil: No additional information.

Other adverse effects: No additional information.

SECTION 13: Disposal considerations

Waste disposal recommendations:

Contact a licensed professional waste disposal service to dispose of this material. Dispose of empty containers as unused product. Product or containers must not be disposed together with household garbage. It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11). Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations. Ensure complete and accurate classification. RCRA (40 CFR 261.33 Haz Waste Code): Xylenes, mixed isomers (1330-20-7) waste number U239. Included in waste stream: F039.

SECTION 14: Transport information

US DOT

UN Number:

ADR, ADN, DOT, IMDG, IATA

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.31.2015

Page 7 of 8

Xylenes, Reagent Grade

1307

Limited Quantity Exception:

None

Bulk:

RQ (if applicable): None

Proper shipping Name: Xylenes.

Hazard Class: 3

Packing Group: III.

Marine Pollutant (if applicable): No additional information.

Comments: None

Non Bulk:

RQ (if applicable): None

Proper shipping Name: Xylenes.

Hazard Class: 3

Packing Group: III.

Marine Pollutant (if applicable): No additional information.

Comments: None



SECTION 15: Regulatory information

United States (USA)

SARA Section 311/312 (Specific toxic chemical listings):

Acute, Fire

SARA Section 313 (Specific toxic chemical listings):

1330-20-7 xylenes, mixed isomers 1.0 % de minimis concentration.

RCRA (hazardous waste code):

1330-20-7 Xylenes - U239.

1330-20-7 xylenes, mixed isomers RCRA waste code U239.

TSCA (Toxic Substances Control Act):

All ingredients are listed.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

1330-20-7 xylenes, mixed isomers 100 lbs.

Proposition 65 (California):

Chemicals known to cause cancer:

None of the ingredients are listed.

Chemicals known to cause reproductive toxicity for females:

None of the ingredients are listed.

Chemicals known to cause reproductive toxicity for males:

None of the ingredients are listed.

Chemicals known to cause developmental toxicity:

None of the ingredients are listed.

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.31.2015

Page 8 of 8

Xylenes, Reagent Grade

None of the ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 1%):

None of the ingredients are listed.

SECTION 16: Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations. Note. The responsibility to provide a safe workplace remains with the user. The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment. The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material. It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases: None

Abbreviations and Acronyms: None

Effective date: 01.31.2015

Last updated: 06.17.2015

HASP
655-671 Stanley Avenue
Brooklyn, New York
NYSDEC Site Number: 224415




APPENDIX J

DIRECTIONS TO NEAREST HOSPITAL



655 Stanley Ave, Brooklyn, NY 11207 to Brookdale University Hospital Medical Center, 1110 Granville Payne Ave, Brooklyn, NY 11207

Drive 0.6 mile, 4 min

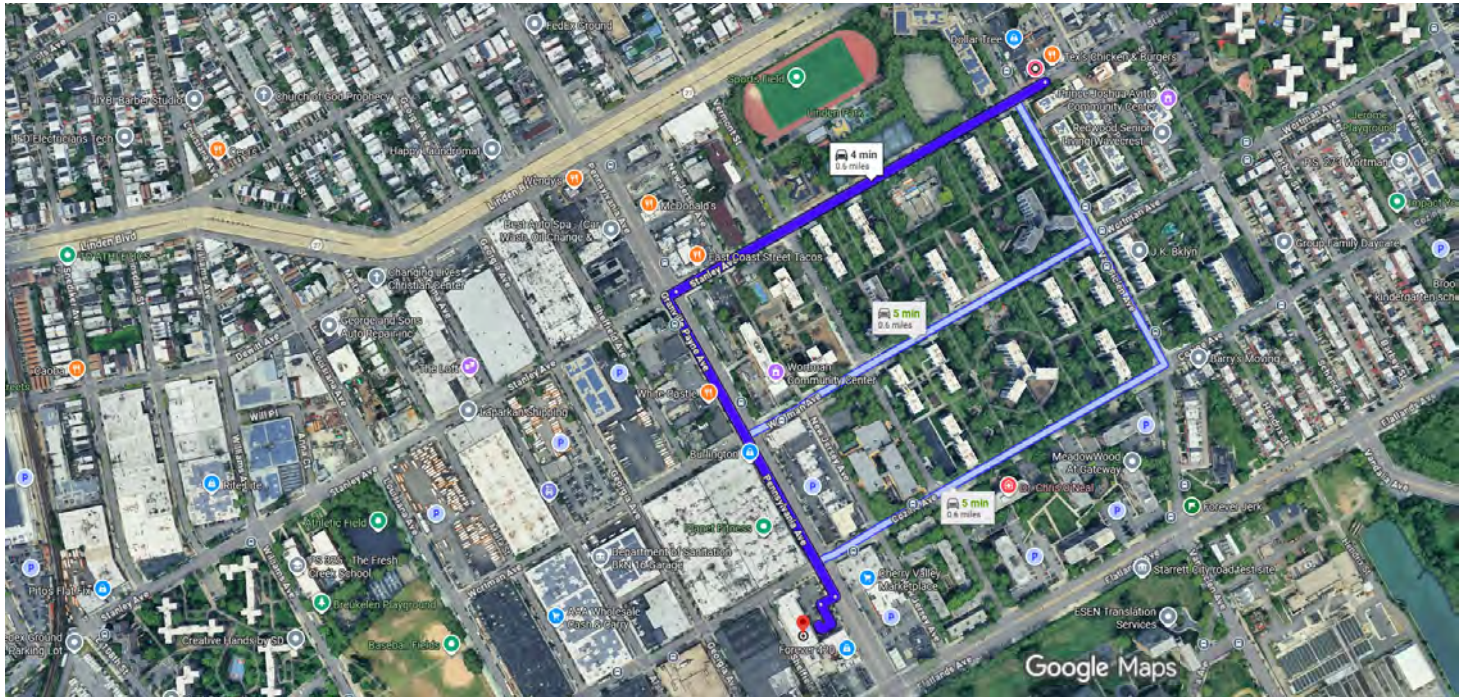

Imagery ©2026 Google, Map data ©2026, Map data ©2026 Google 200 ft

655 Stanley Ave
Brooklyn, NY 11207

- ↑ 1. Head toward Van Siclen Ave
_____ 0.3 mi
- ↶ 2. Turn left onto Granville Payne Ave/Pennsylvania Ave
_____ 0.3 mi
- ↷ 3. Turn right
_____ 62 ft
- ↶ 4. Turn left
 - 📘 Destination will be on the left
 - _____ 151 ft

Brookdale University Hospital Medical Center
1110 Granville Payne Ave, Brooklyn, NY 11207

APPENDIX C

Community Air Monitoring Plan

UNIDOS ZR LLC
655-671 STANLEY AVENUE, BROOKLYN
KINGS COUNTY, NEW YORK

Community Air Monitoring Plan

NYSDEC Site Number: 224415

Prepared for:
Unidos ZR LLC
751 3rd Avenue
Franklin Square, New York 11010

Prepared by:
EnviroTrac Engineering & Geology P.C.
5 Old Dock Road
Yaphank, New York 11980
631-924-3001

MAY 2026

This Community Air Monitoring Plan (CAMP) requires real-time monitoring for volatile organic compounds (VOCs) within and at the downwind perimeter of each designated work area when certain activities are in progress. It is not intended for use in establishing action levels for worker respiratory protection. Rather, its intent is to provide a measure of protection for the downwind community and occupants of the building (i.e., off-site receptors including residences and businesses and on-site workers not directly involved with the subject work activities) from potential airborne contaminant releases as a direct result of investigative and remedial work activities. The action levels specified herein require increased monitoring, corrective actions to abate emissions, and/or work shutdown. Additionally, the CAMP helps to confirm that work activities did not spread contamination off-site through the air.

Reliance on the procedures specified in the CAMP should not preclude simple, common-sense measures to keep VOCs and odors at a minimum around the work areas.

Proposed Monitoring

Real-time monitoring for volatile organic compounds (VOCs) will be conducted during implementation of the non-emergency Interim Remedial Measure (IRM) to provide a measure of protection for the downwind community (i.e., off-site receptors including residences and businesses) from potential airborne contaminant releases as a direct result of the remedial work activities.

Periodic monitoring for VOCs will be required during sub-slab depressurization system (SSDS) installation activities. In some instances, depending upon the proximity of potentially exposed individuals and/or field observations during implementation of such work, continuous monitoring may be required during these activities.

VOC Monitoring, Response Levels, and Actions

VOCs will be monitored at the downwind perimeter of the work area on a periodic basis during the installation of the SSDS wells. Upwind concentrations will be measured at the start of each workday and periodically thereafter to establish background conditions. The results will be compared to the levels specified below:

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area exceeds 5 parts per million (ppm) above background for a 15-minute average, work activities will be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for a 15-minute average.

- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.

If total VOC concentrations opposite the walls of occupied structures or next to intake vents exceed 1 ppm, monitoring should occur within the occupied structure(s). Background readings in the occupied spaces must be taken prior to commencement of the planned work. Any unusual background readings should be discussed with New York State Department of Health (NYSDOH) prior to commencement of the work.

All readings will be recorded and available for the New York State Department of Environmental Conservation (NYSDEC) and the NYSDOH personnel to review.