

2019 Vapor Intrusion Annual Monitoring Report for Building No. 1

Former Macbeth Kollmorgen Corporate Site 617 Little Britain Road New Windsor, Orange County, New York. NYSDEC Site Number: 3-36-037

18 June 2019

Project No.: 0501429.03



Document details	The details entered below are automatically shown on the cover and the main page footer. PLEASE NOTE: This table must NOT be removed from this document.			
Document title	2019 Vapor Intrusion Annual Monitoring Report for Building No. 1			
Document subtitle Former Macbeth Kollmorgen Corporate Site 617 Little Britain Road New Windso County, New York. NYSDEC Site Number: 3-36-037				
Project No.	0501429.03			
Date	18 June 2019			
Version	1.0			
Author	K. Pickering			
Client Name	Fortive			

Document history

				ERM appro	ERM approval to issue		
Version	Revision	Author	Reviewed by	Name	Date	Comments	
Final	00	K. Pickering	E. Rossano	Name	06.18.2019	Text	

Signature Page

18 June 2019

2019 Vapor Intrusion Annual Monitoring Report for Building No. 1

Former Macbeth Kollmorgen Corporate Site 617 Little Britain Road New Windsor, Orange County, New York. NYSDEC Site Number: 3-36-037

Karenficking

Crnest Rossano

Karen Pickering Senior Project Manager Ernie Rossano Partner

ERM Inc. 105 Maxess Road Melville. NY 11747

© Copyright 2019 by ERM Worldwide Group Ltd and / or its affiliates ("ERM"). All rights reserved. No part of this work may be reproduced or transmitted in any form, or by any means, without the prior written permission of ERM.

Former Macbeth Kollmorgen Corporate Site 617 Little Britain Road New Windsor, Orange County, New York. NYSDEC Site Number: 3-36-037

CONTENTS

1.	INTRODUCTION							
2.	VAPO	OR INTRUSION INVESTIGATION - MARCH 2019	. 2					
	2.1 2.2	Product Inventory and Facility Operations						
		Sub-Slab Vapor Sample Collection						
3.	INDO	OR AIR AND SUB-SLAB VAPOR SAMPLING RESULTS AND DATA EVALUATION	4					
	3.1	Trichloroethene (TCE)	. 4					
	3.2 Tetrachloroethene (PCE)							
	3.3 1,1,1-Trichoroethane (1,1,1-TCA)							
	3.4 cis-1,2-Dichloroethene (cis-1,2-DCE)							
	3.5	1,1-Dichloroethene (1,1-DCE)						
	3.6	Carbon Tetrachloride	.5					
	3.7	Methylene Chloride	.5					
	3.8	Vinyl Chloride	.5					
4.	CON	CLUSIONS AND RECOMMENDATIONS	6					
	4.1	Conclusions	.6					
	4.2	Recommendations						
ΛDE	ENDIX	A INDOOR AIR QUALITY AND PRODUCT INVENTORY, & SDS SHEETS						
		•						
APF	PENDIX	B CANISTER SAMPLING FIELD DATA SHEET						

LIST OF TABLES

APPENDIX C

- Table 1: Chemicals Present Near Sampling Points
- Table 2: Vapor Intrusion Sampling Results, 19 March 2019
- Table 3: Summary of CVOC Concentrations in Sub-Slab Vapor
- Table 4: Comparison of TCE Results to Soil Vapor/Indoor Air Matrix A
- Table 5: Comparison of PCE Results to Soil Vapor/Indoor Air Matrix B
- Table 6: Comparison of 1,1,1-Trichloroethane Results to Soil Vapor/Indoor Air Matrix B

LABORATORY ANALYTICAL DATA (MARCH 2019)

- Table 7: Comparison of cis-1,2-Dichloroethene Results to Soil Vapor/Indoor Air Matrix A
- Table 8: Comparison of 1,1-Dichloroethene Results to Soil Vapor/Indoor Air Matrix A
- Table 9: Comparison of Carbon Tetrachloride Results to Soil Vapor/Indoor Air Matrix A
- Table 10: Comparison of Methylene Chloride Results to Soil Vapor/Indoor Air Matrix B
- Table 11: Comparison of Vinyl Chloride Results to Soil Vapor/Indoor Air Matrix C

LIST OF FIGURES

Figure 1: Vapor Intrusion and Indoor Air Sampling Locations

Former Macbeth Kollmorgen Corporate Site 617 Little Britain Road New Windsor, Orange County, New York. NYSDEC Site Number: 3-36-037

1. INTRODUCTION

As requested by the New York State Department of Environmental Conservation (NYSDEC) and the New York State Department of Health (NYSDOH), ERM Consulting & Engineering, Inc. (ERM) conducted annual soil vapor intrusion (SVI) monitoring on behalf of the Fortive Corporation in March 2019 at the former Macbeth-Kollmorgen Corporate Site (the Site) located at 617 Little Britain Road in New Windsor, New York. The Site is known as NYSDEC Site No. 3-36-037. The May 2011 Site Management Plan (SMP) requires the monitoring of sub-slab vapor at the Site following completion of Remedial Action. The objectives of the annual SVI sampling event were to monitor indoor air and sub-slab soil vapor concentrations at Building No. 1 and assess the on-going level of risk posed to Site workers from Site compounds of concern previously detected in sub-slab vapor samples.

The vapor intrusion investigation conducted in December 2006 confirmed that indoor air quality was consistent with NYSDOH background levels and therefore was not a concern. However, using the matrices provided in the NYSDOH (2006) Guidance for Evaluating Soil Vapor Intrusion in the New York trichloroethene (TCE), tetrachloroethene (PCE), and/or 1,1,1-trichloroethane (1,1,1-TCA) were present in sub-slab vapor samples at concentrations that required continued monitoring of sub-slab vapor at two (2) locations. Active mitigation was not required based on the concentrations of TCE, PCE, and 1,1,1-TCA present in sub-slab vapor.

In May 2017, the NYSDOH updated the Soil Vapor/Indoor Air Matrices with three newly revised and renamed Soil Vapor / Indoor Air Decision Matrices. These new SVI decision matrices supersede those provided in the October 2006 final guidance and subsequent updates to the guidance and are used for evaluation of data in this report.

Former Macbeth Kollmorgen Corporate Site 617 Little Britain Road New Windsor, Orange County, New York. NYSDEC Site Number: 3-36-037

2. VAPOR INTRUSION INVESTIGATION - MARCH 2019

The vapor intrusion investigation conducted in March 2019 included the collection of sub-slab and indoor air samples from two (2) locations within Building No. 1. The current operator in Building No. 1 is Pratt Industries, a manufacturer of corrugated products, including partitions and point of purchase displays. Pratt Industries (formerly known as Quality Packaging and Pratt Quality) was purchased by Pratt Industries in 2015 and is now known as Pratt Industries. The operations at the facility are largely unchanged since the 2018 sampling event.

2.1 Product Inventory and Facility Operations

Prior to sampling, ERM reviewed and completed the NYSDOH Indoor Air Quality Questionnaire and Building Inventory form with Mr. Steve Chichkov of Pratt Industries. The NYSDOH Indoor Air Quality Questionnaire and Building Inventory form is included as **Appendix A** of this report. The purpose of this review was to establish whether the building construction characteristics, air flow patterns, heating, venting, air conditioning systems, and product inventory have changed since the previous SVI monitoring event (January 2018).

In particular, the product inventory documents the materials used by the current operator and/or present at the facility while the sampling activities are being conducted. Pratt Industries receives materials from other manufacturers (including bubble and stretch wrap, clamshells and blank corrugated sheets) and cuts, folds, and assembles these materials into the final products that are then labeled in accordance with customer specifications. The products are created using counter, stacker, and partition assembler equipment. Pratt Industries indicated that they use water-based inks and glues to create labels on their products.

On 19 March 2019, ERM personnel conducted a visual reconnaissance of the operational areas to identify materials present. Twenty-one (21) different products were observed during the building survey and are documented in **Appendix A**. **Table 1** presents all of the chemicals, along with their CAS Registry Numbers, listed on the Safety Data Sheets (SDSs) for products observed on-Site. Among the seventy-eight (78) chemicals listed in products used on-Site, fifteen (15) of them are included on the TO-15 analytical list.

Based on ERM's observations and information provided by Pratt Industries, the primary products used and stored at the facility are a water-based printing ink called J.M. Fry Solarflex printing ink, Specialty Adhesives and Coatings Spec Bond and Super Bio Clean 5G.

Printing inks are stored in sealed 5-gallon buckets near sampling points SG-2 and IA-2. Several 55-gallon drums containing Specialty Adhesives and Coatings Spec Bond were present near the SG-2 / IA-2 location. The container label for Specialty Adhesives and Coatings Spec Bond states contents may contain vinyl acetate; however, the SDS did not list vinyl acetate as a chemical in the product. This could be due to the age of the material stored on-site compared to the SDS (i.e., older products may have contained vinyl acetate).

Inventory items that are no longer present compared to earlier surveys include wasp and hornet spray as an exterminator service is now used.

2.2 Soil Vapor and Indoor Air Sampling

On 19 March 2019, sub-slab vapor samples were collected from the two (2) permanent sub-slab vapor sampling points installed at the former SG-2 and SG-3 locations within Building No. 1. Two indoor air samples were also collected to monitor indoor air quality. The indoor air samples (AA-2 and AA-3) were paired with the sub-slab samples (indoor air sample AA-2 was collected adjacent to SG-2 and AA-3 was

 www.erm.com
 Version: 1.0
 Project No.: 0501429.03
 Client: Fortive
 18 June 2019
 Page 2

NO. 1

Former Macbeth Kollmorgen Corporate Site 617 Little Britain Road New Windsor, Orange County, New York. NYSDEC Site Number: 3-36-037

collected adjacent to SG-3). The indoor air samples were collected on the same day as the sub-slab vapor samples. The locations of the sampling points are shown on **Figure 1**.

2.2.1 Sub-Slab Vapor Sample Collection

On 19 March 19 2019, sub-slab vapor samples were collected over an 8-hour time period from SG-2 and SG-3 within the main building. Pursuant to the NYSDOH guidance, the soil vapor samples were collected using batch certified laboratory-clean 6-liter stainless-steel SUMMA® canisters and calibrated regulators that were set to facilitate the collection of samples at a flow rate less than 0.2-liter per minute. Before sampling, a helium leak tracer test was performed to check the integrity of the seal at each sampling location (to confirm the sub-slab vapor sample was not cross contaminated with indoor air.

Helium Leak Tracer Test

A helium leak tracer test was performed at each location prior to sampling to confirm the integrity of the seal around the tubing. Laboratory-grade helium, a Model MGD-2002 Multi-Gas Leak Locater, a plastic shroud, and hydraulic cement were used for the leak tracer test. Sample dedicated Teflon™ tubing was attached to the barbed fitting at the top of the sub-slab vapor probe that was extended through the bottom of the plastic shroud that had been secured to the ground and sealed to prevent the helium from escaping. The tubing extending from below the slab through the shroud was then connected to the helium detector. A separate length of Teflon tubing was connected to a sealed fitting in the shroud wall where helium was injected. After enriching the void space within the shroud with helium, the helium detector was connected to the tubing to measure the helium concentration within the shroud. After sufficient concentration was measured within the shroud (typically 10 percent [%]), the helium detector was reconnected to the sealed sub-slab vapor tubing to check if the helium had infiltrated through the cement seal into the ground. Helium was not detected at either sample point and it can be concluded that no significant leaks occurred for the duration of the sampling period at either location.

Sample Collection and Analysis

Before sampling, the initial pressure of each SUMMA® canister was recorded in inches of mercury (Hg). The initial pressures of the SUMMA® canisters were 29 inches of Hg for SG-2 and 29.5 inches of Hg for SG-3. The post-sampling pressures for each SUMMA® canister was 6 inches of Hg for SG-2 and 7 inches of Hg for SG-3. A copy of the Canister Sampling Field Data Sheet is included in **Appendix B**.

Once sample collection was complete, labeling of the SUMMA® canisters was completed and the canisters were transported via laboratory courier under chain-of-custody protocols to SGS North America, Inc.'s laboratory (NYSDEC Certification No. 10983, NYSDOH ID# 10983) in Dayton, New Jersey (SGS). The sub-slab vapor samples were analyzed via United States Environmental Protection Agency (USEPA) Method TO-15.

2.2.2 Indoor Air Sample Collection

On 19 March 2019, two (2) indoor air samples (AA-2 and AA-3) were collected at the Site. Each sample was collected adjacent to a corresponding soil gas sample location (SG-2 and SG-3). The indoor air samples were collected to assess indoor air at the locations where chlorinated volatile organic compounds (CVOCs) had been detected in the sub-slab vapor samples. AA-2 was collected adjacent to SG-2, and AA-3 was collected adjacent to the SG-3. Both indoor air samples were collected on the same day that the sub-slab vapor samples were collected. The indoor air sampling locations are presented in Figure 1.

The indoor air samples were collected over an 8-hour time period using laboratory-clean SUMMA® canisters and calibrated regulators that were set to facilitate the collection of samples at a flow rate less than 0.2-liter per minute. The SUMMA® canisters were stationed so that the sample would be collected

2019 VAPOR INTRUSION ANNUAL MONITORING REPORT FOR BUILDING NO. 1

Former Macbeth Kollmorgen Corporate Site 617 Little Britain Road New Windsor, Orange County, New York. NYSDEC Site Number: 3-36-037

from a height of approximately five (5) feet above ground surface. The initial pressures of the SUMMA® canisters were measured as 27 inches of Hg in AA-2 and >30 inches of Hg in AA-3 canisters. The post-sampling pressures recorded for each SUMMA® canister was 6 inches of Hg for AA-2 and 4 inches of Hg for AA-3. The Canister Sampling Field Data Sheets are provided in **Appendix B**.

Once sample collection was complete, labeling of the canisters were completed and the indoor air SUMMA® canisters were transported via laboratory courier to SGS under chain-of-custody protocols. The indoor air samples were analyzed via USEPA Method TO-15

3. INDOOR AIR AND SUB-SLAB VAPOR SAMPLING RESULTS AND DATA EVALUATION

The following sections summarize the results of sub-slab vapor and indoor air sampling conducted on 19 March 2019. The analytical data are summarized in **Table 2**. As discussed previously, in May 2017 the NYSDOH updated the Soil Vapor/Indoor Air Matrices that are used to determine the minimum actions that are recommended to address the current exposures related to sub-slab vapor intrusion. A summary of historical compounds of concern is presented in **Table 3**.

The updated NYSDOH Soil Vapor/Indoor Air Matrices A, B, and C were used to evaluate all eight (8) compounds detected, even if the compounds were not historical compounds of concern at the Site.Matrix A was used to evaluate TCE, cis-1,2-Dichloroethene (cis-1,2-DCE), 1,1-Dichloroethene (1,1-DCE), and carbon tetrachloride. Matrix B was used to evaluate PCE, 1,1,1-TCA, and methylene chloride. Matrix C was used to evaluate vinyl chloride. These matrix comparisonss are presented as **Table 4** through **Table 11** and are discussed in **Sections 3.1** through **3.8**, below.

Of the thirty-four (34) compounds detected in the indoor air samples, fifteen (15) were found to be included in products used on-Site. No VOCs or CVOCs were detected in indoor air samples (AA-2 and AA-3) at concentrations above the NYSDOH AGVs or Occupational Safety and Health Administration (OSHA) Permissible Exposure Limit (PEL) time-weighted averages (TWA).

The laboratory analytical report for the samples is included in **Appendix C**. The results of the sub-slab vapor and indoor air sampling follow.

3.1 Trichloroethene (TCE)

TCE was detected in sub-slab vapor at SG-2 at a concentration of 3.9 μ g/m³ and in the corresponding indoor air sample (AA-2) at a concentration of 0.54 μ g/m³. TCE was not detected in the sub-slab vapor at SG-3 and was detected in the corresponding indoor air sample (AA-3) at a concentration of 0.97 μ g/m³. The TCE concentrations detected in the sub-slab at these locations during the March 2019 sampling event are similar to previous sampling events and do not reflect an increasing trend in the sub-slab vapor concentrations (**Table 3**). Additionally, as shown on **Table 1**, two (2) products containing TCE are used on-Site and are documented in **Appendix A**. No further action (NFA) is recommended for TCE at SG-2/AA-2 and SG-3/AA-3 based on the comparison of sub-slab vapor and indoor air concentrations to NYSDOH Matrix A (**Table 4**).

3.2 Tetrachloroethene (PCE)

PCE was detected in the sub-slab vapor at SG-2 at a concentration of 2.5 μ g/m³ and the in corresponding indoor air sample (AA-2) at a concentration of 4.5 μ g/m³. PCE was also detected in the sub-slab vapor at SG-3 at a concentration of 146 μ g/m³ and the in corresponding indoor air sample (AA-3) at a concentration of 3.9 μ g/m³. The PCE concentrations detected in the sub-slab at these locations during the March 2019 sampling event are similar to or lower than previous sampling events and do not reflect an

Former Macbeth Kollmorgen Corporate Site 617 Little Britain Road New Windsor, Orange County, New York. NYSDEC Site Number: 3-36-037

increasing trend in the sub-slab soil vapor concentrations (**Table 3**). NFA is recommended for PCE at SG-2, while further monitoring is recommended at SG-3 based on the comparison of sub-slab vapor and indoor air concentrations to NYSDOH Matrix B (**Table 5**).

3.3 1,1,1-Trichoroethane (1,1,1-TCA)

1,1,1-TCA was detected in sub-slab vapor at concentrations of 174 μ g/m³ and 46 μ g/m³ at locations SG-2 and SG-3, respectively. 1,1,1-TCA was not detected in either of the corresponding indoor air samples (AA-2 and AA-3) above the reporting limit of 0.44 μ g/m³. The 1,1,1-TCA concentrations detected in the sub-slab at these locations during the March 2019 sampling event are similar to or lower than previous sampling events and do not reflect an increasing trend in the sub-slab soil vapor concentrations (**Table 3**). NFA is recommended for 1,1,1-TCA at SG-2/AA-2 and SG-3/AA-3 based on the comparison of sub-slab vapor and indoor air and concentrations to NYSDOH Matrix B (**Table 6**).

3.4 cis-1,2-Dichloroethene (cis-1,2-DCE)

Cis-1,2-Dichloroethene (cis-1,2-DCE) was not detected above the reporting limit in sub-slab vapor and indoor air samples SG-2, SG-3 and AA-2. Cis-1,2-DCE was detected at a concentration of 2.9 µg/m³ in AA-3. Based on the comparison to NYSDOH Matrix A, NFA is recommended for cis-1,2-DCE at SG-2/AA-2 and identifying the source(s) affecting the indoor air at SG-3/AA-3 (**Table 7**). Cis-1,2-DCE has not historically been a compound of concern in soil vapor or indoor air at the Site. ERM recommends NFA is necessary at SG-2/AA-2 or SG-3/AA-3.

3.5 1,1-Dichloroethene (1,1-DCE)

1,1-Dichloroethene (1,1-DCE) was not detected above the reporting limit in the sub-slab vapor at SG-2 or SG-3, or their corresponding indoor air samples, AA-2 or AA-3. NFA is recommended for 1,1-DCE based on the comparison to NYSDOH Matrix A (**Table 8**).

3.6 Carbon Tetrachloride

Carbon tetrachloride was not detected above the reporting limit in the sub-slab vapor at SG-2 or SG-3; however, it was detected in the corresponding indoor air samples (AA-2 and AA-3). This compound has not historically been a compound of concern at the Site. NFA is recommended for carbon tetrachloride at SG-2 and SG-3 based on comparison to NYSDOH Matrix A (**Table 9**).

3.7 Methylene Chloride

Methylene chloride was not detected in the sub-slab vapor at SG-2 or SG-3 above the reporting limit of 2.8 μg/m³. However, this compound was detected in the corresponding indoor air samples, AA-2 and AA-3 at concentrations of 1.5 and 6.3 μg/m³, respectively. Methylene chloride has not historically been a compound of concern at the Site. NFA is recommended for methylene chloride at SG-2 and SG-3 based on comparison of concentrations detected in sub-slab vapor and indoor air to NYSDOH Matrix B (**Table 10**).

3.8 Vinyl Chloride

Vinyl chloride was not detected above the reporting limit in the sub-slab vapor samples at SG-2 or SG-3, or their corresponding indoor air samples (AA-2 or AA-3) and has not historically been a compound of concern at the Site. NFA is recommended for vinyl chloride based on comparison of the results to NYSDOH Matrix C (**Table 11**).

NO. 1

Former Macbeth Kollmorgen Corporate Site 617 Little Britain Road New Windsor, Orange County, New York. NYSDEC Site Number: 3-36-037

4. CONCLUSIONS AND RECOMMENDATIONS

4.1 Conclusions

After the initial sub-slab vapor and indoor air sampling event conducted in December 2006, this Site has been sampled annually since 2008. The indoor air VOC and CVOC concentrations have been compared to the OSHA 8-hour TWA, NYSDOH Air Guidance Values, and the May 2017 Soil Vapor/Indoor Air decision matrices, as appropriate. The following conclusions and recommendations were drawn based on the sub-slab vapor and indoor air sampling completed in March 2019 (**Table 2** and **Table 3**):

TCE, PCE, and 1,1,1-TCA were detected in sub-slab soil vapor points SG-2 and/or SG-3 during the March 2019 sampling event. These compounds have historically been present in soil vapor at the Site and were evaluated against their respective NYSDOH Matrix. The following conclusions were drawn based on the data results:

- TCE: NFA is recommended for TCE based on the concentrations detected in sub-slab vapor and indoor air and comparison to NYSDOH Matrix A (Table 4).
- PCE: NFA is recommended for PCE at SG-2, however continued monitoring is recommended based on the indoor air sample (AA-3) taken at SG-3 in comparison to NYSDOH Matrix B (Table 5).
- 1,1,1-TCA: NFA is recommended for 1,1,1-TCA based on the concentrations detected in sub-slab vapor and indoor air and comparison to NYSDOH Matrix B (Table 6).

Based on the data evaluation, 1,1- DCE (**Table 8**) and vinyl chloride (**Table 11**) were eliminated from further evaluation because neither the sub-slab vapor or indoor air results were detected above the reporting limits.

Carbon tetrachloride (Matrix A, **Table 9**) and methylene chloride (Matrix B, **Table 10**) were detected during the March 2019 sampling event. Although these compounds are not historically compounds of concern at the Site, each was compared to the NYSDOH May 2017 decision matrices and NFA was recommended for each of these compounds based on the NYSDOH Matrix used.


Cis-1,2-DCE (Matrix A, **Table 7**) was compared to the NYSDOH May 2017 decision matrices and NFA was recommended at SG-2/AA-2 and identify sources and resample or mitigate was recommended at SG-3/AA-3. Efforts will be made to identify any indoor air sources on-Site, however since cis-1,2-DCE has not historically been a compound of concern at the Site, ERM recommends discontinued monitoring at both locations for this compound.

4.2 Recommendations

As discussed in the previous sections, when the indoor air and sub-slab vapor data are compared to the current NYSDOH decision matrices, No Further Action is recommended for most of the compounds detected. Decreasing or stable trends of total targeted VOC's have been observed since sub-slab vapor monitoring was initiated in December 2006 (**Table 3**). NYSDOH decision matrices recommend further monitoring of SG-3 for PCE based on indoor air measurements (**Table 5**).

The SMP requires post-Remedial Action monitoring of sub-slab vapor at the Site and specifies that the sub-slab vapor samples SG-2 and SG-3 will be sampled annually until the vapor levels meet the NYSDOH AGVs. The SMP states that sampling may be modified with the approval of the NYSDEC. Based on the results of the March 2019 vapor intrusion investigation, no additional soil vapor and indoor air evaluation is recommended for the SG-2/AA-2 and continued monitoring for PCE only at SG-3/AA-3 is warranted. After NYSDEC approval of the changes to the monitoring plan, ERM will revise the SMP to reflect these changes.

FIGURES

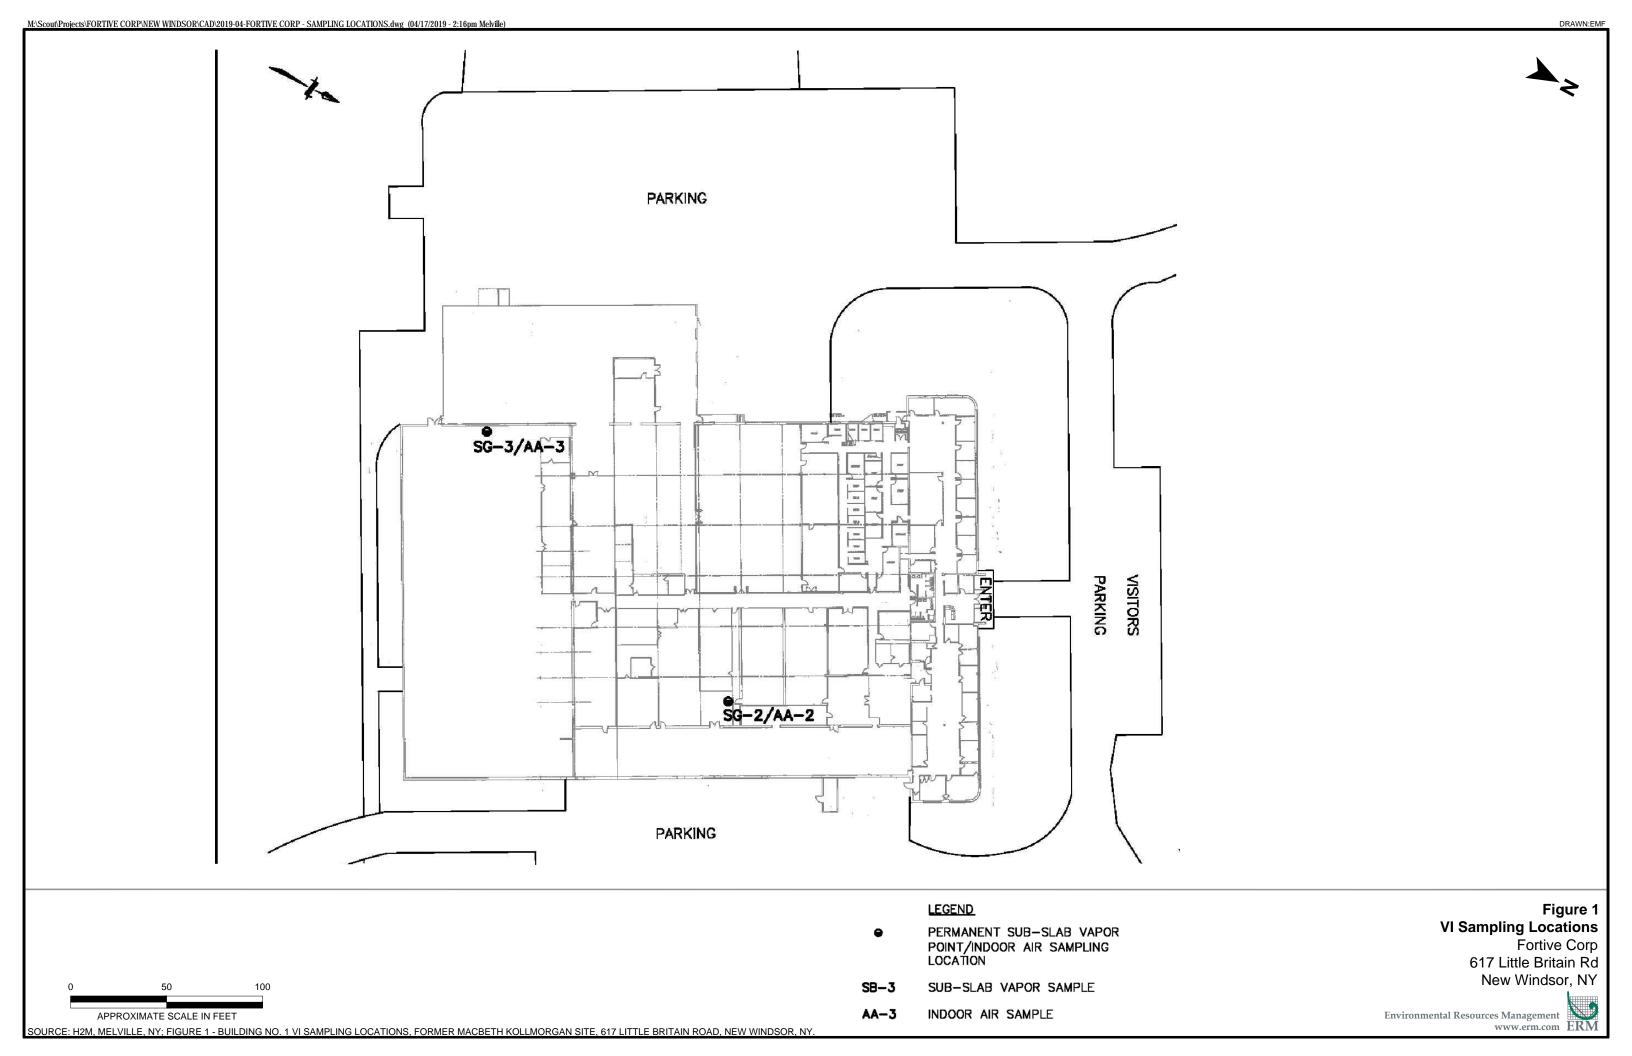

TABLES

Table 1 Chemicals Present Near Sampling Points

CAC Desistration No.	mber Chemical Name	Product
CAS Registration Nu 75-37-6	1,1-Difluoroethane	QD Contact Cleaner
95-63-6	1,2,4-Trimethylbenzene	Rustoleum PTOUCH2X +SSPR 6PK GLOSS WHITE, HPERF LSPR 6PK STRIPE
C0027 04 4	1 Danca hamanakunan kuduran kad	BLUE STRIPING, Klean Strip Paint Thinner
68037-01-4 108-65-6	1-Decene, homopolymer, hydrogenated 1-Methoxy-2-Propyl Acetate	Food Grade Anti-Seize & Lubricating Compound
	2-(2-ethoxyethoxy) - Ethanol	Rustoleum PTOUCH2X +SSPR 6PK GLOSS WHITE
111-90-0	2-(2-ethoxyethoxy) - Ethanol	FF Prem Plus GCMI 103 Yellow (ED.X), SF St. Patrick's Green, FF Prem Plus GCMI 21 Green (ED.X), SF Phillips Blue
540-84-1	2,2,4-Trimethylpentane	QD Contact Cleaner
75-83-2	2,2-Dimethylbutane	QD Contact Cleaner
128-39-2	2,6-DI-TERT-BUTYLPHENOL	MOBIL DTE OIL LIGHT
107-83-5	2-Methylpentane	QD Contact Cleaner
67-64-1	2-Propanone	Oatey PVC Heavy Duty Clear or Gray Cement
67-64-1	Acetone	Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK, Rustoleum PTOUCH2X
		+SSPR 6PK GLOSS WHITE, Dry Moly Lube, Carb + Choke Cleaner, SLIP Plate
		Chain & Cable Aerosol, 3M(TM) Spray-Mount(TM) Artist's Adhesive 6064,
		6065, HPERF LSPR 6PK STRIPE BLUE STRIPING, A00725 ICM WHT LTHM GRS
		ICA725 16net11, Oatey Clear Cleaner
68551-13-3	Alcohols, C12-15, ethoxylated propoxylated	GOJO® NATURAL* ORANGE™ Pumice Hand
		Cleaner
64742-89-8	Aliphatic Hydrocarbon	Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK, HPERF LSPR 6PK STRIPE
		BLUE STRIPING
112-80-1	Aliphatic organic acid	Tap Magic ProTap Metal Cutting Fluid
112-62-9	Aliphatic organic ester	Tap Magic ProTap Metal Cutting Fluid
21645-51-2	Aluminum Trihydrate	TOPCOAT MB Plus
64742-95-6	Aromatic Hydrocarbon	Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK, Rustoleum PTOUCH2X
		+SSPR 6PK GLOSS WHITE, HPERF LSPR 6PK STRIPE BLUE STRIPING
25550-14-5	Benzene, Ethylmethyl-	Klean Strip Paint Thinner
103-65-1	Benzene, Propyl- (N-Propylbenzene)	Klean Strip Paint Thinner
25551-13-7	Benzene, Trimethyl-	Klean Strip Paint Thinner
16470-29-5	C.I. 220 Optical Brightener	Marking Ink
471-34-1	Calcium Carbonate	Food Grade Anti-Seize & Lubricating Compound
1333-86-4	Carbon Black	Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK
124-38-9	Carbon Dioxide	Chain and Cable Lube, A07311 ZEP PRO NF SLVT DGRS R12201 20N20, Carb
		+ Choke Cleaner, Car Quest Carb & Choke Cleaner, WD-40, Jet Force Wasp & Hornet Killer, Motor Medic Thrust Starting Fluid
64742-05-1	Coke (Petroleum), calcined	SLIP Plate Chain & Cable Aerosol
112945-52-5	Colloidal silicon dioxide	Oatey PVC Heavy Duty Clear or Gray Cement
108-94-1	Cyclohexanone	Oatey PVC Heavy Duty Clear or Gray Cement, Oatey Clear Cleaner
75-09-2	Dichloromethane	Car Quest Carb & Choke Cleaner
111-46-6	diethylene glycol	Roll-on Stamp Pad Inker
616-38-6	Dimethyl Carbonate	Rustoleum PTOUCH2X +SSPR 6PK GLOSS WHITE
26002-80-2	d-Phenothrin	Jet Force Wasp & Hornet Killer
60-29-7	Ethan, 1,1'-OXYBIS-	Motor Medic Thrust Starting Fluid
141-43-5	Ethanolamine	SF PH Adjuster (#1000 Solution), FF Prem Plus GCMI 103 Yellow (ED.X), FF
		Prem Plus GCMI 21 Green (ED.X)
9007-33-4	Ethanolamine	Super Bioclean 5G, Super Special Blade Clean 3G
141-78-6	ethyl acetate	Barge AP
64-17-5	Ethyl Alcohol	Klean Strip Denatured Alcohol
100-41-4	Ethylbenzene	Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK, Rustoleum PTOUCH2X
		+SSPR 6PK GLOSS WHITE, Car Quest Carb & Choke Cleaner, HPERF LSPR
111-76-2	Ethylene Glycol Monobutyl Ether	6PK STRIPE BLUE STRIPING Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK, Rustoleum PTOUCH2X
111-70-2	Ethylene Glycol Monobutyl Ethel	+SSPR 6PK GLOSS WHITE, SF St. Patrick's Green, SF Phillips Blue
	el Hel	
56-81-5	Glycerol/Glycerine	Marking Ink, Roll-on Stamp Pad Inker
142-82-5	Heptane	Dry Moly Lube, Barge AP, SLIP Plate Chain & Cable Aerosol, Motor Medic Thrust Starting Fluid
64742-49-0	Heptane Isomers	Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK, Rustoleum PTOUCH2X
		+SSPR 6PK GLOSS WHITE, QD Contact Cleaner, 3M(TM) Spray-Mount(TM)
		Artist's Adhesive 6064, 6065, HPERF LSPR 6PK STRIPE BLUE STRIPING
426260-76-6	Heptane, branched, cyclic and linear	Dry Moly Lube, A00725 ICM WHT LTHM GRS ICA725 16net11
110-54-3	Hexane	QD Contact Cleaner
64742-53-6	Hydrotreated light naphthenic petroleum distillates	Chain and Cable Lube, WD-40, Motor Medic Thrust Starting Fluid
14807-96-6	Hydrous Magnesium Silicate	Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK, Food Grade Anti-Seize &
		Lubricating Compound
75-28-5	Isobutane	3M(TM) Spray-Mount(TM) Artist's Adhesive 6064, 6065
67-63-0	Isopropyl Alcohol	QD Contact Cleaner, Dry Moly Lube, Jet Force Wasp & Hornet Killer
1317-65-3	Limestone	HPERF LSPR 6PK STRIPE BLUE STRIPING

Table 1 Chemicals Present Near Sampling Points

5989-27-5	Limonene	GOJO® NATURAL* ORANGE™ Pumice Hand		
		Cleaner		
64742-86-8	Liquified Petroleum Gas	HPERF LSPR 6PK STRIPE BLUE STRIPING		
67-56-1	Methanol	Klean Strip Denatured Alcohol		
78-93-3	Methyl ethyl ketone	Oatey PVC Heavy Duty Clear or Gray Cement, Oatey Clear Cleaner		
1317-33-5	Molybdenum disulphide	Dry Moly Lube		
64742-82-1	Naptha (petroleum, hydrodesulfurized heavy	Klean Strip Paint Thinner		
106-97-8	n-Butane	Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK, Rustoleum PTOUCH2X		
		+SSPR 6PK GLOSS WHITE, Dry Moly Lube, SLIP Plate Chain & Cable Aerosol,		
		A00725 ICM WHT LTHM GRS ICA725 16net11		
123-86-4	n-Butyl Acetate	Rustoleum PTOUCH2X +SSPR 6PK GLOSS WHITE		
64742-46-9	Petroleum Base Oil	WD-40		
64742-54-7	Petroleum Base Oil	WD-40		
64742-65-0	Petroleum Base Oil	WD-40		
64742-71-8	Petroleum Base Oil	WD-40		
64742-52-5	Petroleum Oil	SLIP Plate Chain & Cable Aerosol, Motor Medic Thrust Starting Fluid		
25322-68-3	polyethylene glycol	Roll-on Stamp Pad Inker		
0009003-13-8	Polypropylene glycol, monobutyl ether	Pallube 32P		
9002-86-2	Polyvinyl chloride	Oatey PVC Heavy Duty Clear or Gray Cement		
74-98-6	Propane	Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK, Rustoleum PTOUCH2		
		+SSPR 6PK GLOSS WHITE, Dry Moly Lube, SLIP Plate Chain & Cable Aerosol,		
		3M(TM) Spray-Mount(TM) Artist's Adhesive 6064, 6065, A00725 ICM WHT		
		LTHM GRS ICA725 16net11		
5131-66-8	Propylene Glycol Monobutyl Ether	Rustoleum PTOUCH2X +SSPR 6PK GLOSS WHITE		
64742-88-7	Solvent Naphta (petroleum), Medium Aliph.	Dry Moly Lube, HPERF LSPR 6PK STRIPE BLUE STRIPING		
8052-41-3	Stoddard Solvents	Klean Strip Paint Thinner		
64742-47-8	Synthetic Isoparaffinic Hydrocarbon	Chain and Cable Lube, Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK,		
		Carb + Choke Cleaner, WD-40, Klean Strip Paint Thinner, A00725 ICM WHT		
		LTHM GRS ICA725 16net11, Jet Force Wasp & Hornet Killer		
109-99-9	Tetrahydrofuran	Oatey PVC Heavy Duty Clear or Gray Cement		
7896-12-0	Tetramethrin	Jet Force Wasp & Hornet Killer		
13463-67-7	Titanium Dioxide	Rustoleum PTOUCH2X +SSPR 6PK GLOSS WHITE, TOPCOAT MB Plus, HPERF		
		LSPR 6PK STRIPE BLUE STRIPING		
108-88-3	Toluene	Barge AP, Carb + Choke Cleaner, Car Quest Carb & Choke Cleaner, HPERF		
		LSPR 6PK STRIPE BLUE STRIPING		
79-01-6	Trichloroethylene	A07311 ZEP PRO NF SLVT DGRS R12201 20N20, Aerosolve II Aerosol		
8042-47-5	White Mineral Oil	Food Grade Anti-Seize & Lubricating Compound		
1330-20-7	Xylenes	Rustoleum PVTLBL SSPR 12PK QUICK FLAT BLACK, Rustoleum PTOUCH2X		
		+SSPR 6PK GLOSS WHITE, Car Quest Carb & Choke Cleaner, HPERF LSPR		
		6PK STRIPE BLUE STRIPING, Klean Strip Paint Thinner		
138265-88-0	Zinc Borate	TOPCOAT MB Plus		
1314-13-2	Zinc oxide	Food Grade Anti-Seize & Lubricating Compound		

Table 2 March 2019 Vapor Intrusion Sampling Results Macbeth - Kollmorgen Corporate Site New Windsor, New York

Client Sample ID:		NYSDOH		AA-2-031919	SG-2-031919	AA-3-031919	SG-3-031919
Lab Sample ID:		Air	OSHA	JC84841-1	JC84841-2	JC84841-4	JC84841-3
Date Sampled:		Guidance	TWA	3/19/2019	3/19/2019	3/19/2019	3/19/2019
Matrix:		Values ¹	PEL ²	Indoor Air	Soil Vapor	Indoor Air	Soil Vapor
MS Volatiles (TO-15) - ug/m3	•				•		•
Acetone	ug/m3	-	2400000	54.4	21	24	16
1,3-Butadiene	ug/m3	-	250	< 0.35	<1.8	< 0.35	<1.8
Benzene	ug/m3	-	-	3	1.7 J	1.6	<2.6
Bromodichloromethane	ug/m3	-	-	<0.54	<2.7	<0.54	<2.7
Bromoform	ug/m3	-	5000	< 0.33	<1.7	< 0.33	<1.7
Bromomethane	ug/m3	-	80000	<0.62	<3.1	<0.62	<3.1
Bromoethene	ug/m3	-	-	<0.70	<3.5	<0.70	<3.5
Benzyl Chloride	ug/m3	-	5000	<0.82	<4.1	<0.82	<4.1
Carbon disulfide	ug/m3	-	3130	0.37 J	<2.5	<0.50	<2.5
Chlorobenzene	ug/m3	-	350000	<0.74	<3.7	<0.74	<3.7
Chloroethane	ug/m3	-	2600000	<0.42	<2.1	<0.42	<2.1
Chloroform	ug/m3	-	240000	<0.78	<3.9	<0.78	<3.9
Chloromethane	ug/m3	-	80000	1.4	<1.7	1.2	<1.7
3-Chloropropene	ug/m3	-	3000	<0.50	<2.5	<0.50	<2.5
2-Chlorotoluene	ug/m3	-	-	<0.83	<4.1	<0.83	<4.1
Carbon tetrachloride	ug/m3	-	2000	0.52	<1.0	0.49	<1.0
Cyclohexane	ug/m3	-	1050000	1.7	<2.8	0.96	<2.8
1,1-Dichloroethane	ug/m3	-	400000	<0.65	<3.2	<0.65	<3.2
1,1-Dichloroethylene	ug/m3	-	-	<0.13	<0.63	<0.13	<0.63
1,2-Dibromoethane 1,2-Dichloroethane	ug/m3	-	1000	<0.61	<3.1	<0.61	<3.1
1,2-Dichloroethane 1,2-Dichloropropane	ug/m3	-	3000	0.73 <0.74	<3.2 <3.7	0.45 J <0.74	<3.2 <3.7
1,4-Dioxane	ug/m3	-	350000 360000	<0.74	<3.7 <2.9	<0.74	<3.7 <2.9
Dichlorodifluoromethane	ug/m3 ug/m3	-	4960000	2.7	6.4	2.5	<2.9 28
Dibromochloromethane	ug/m3	-	-	<0.68	<3.4	<0.68	<3.4
trans-1,2-Dichloroethylene	ug/m3	-	-	<0.63	<3.2	<0.63	<3.2
cis-1,2-Dichloroethylene	ug/m3	_	_	<0.13	<0.63	2.9	<0.63
cis-1,3-Dichloropropene	ug/m3	_	_	<0.73	<3.6	<0.73	<3.6
m-Dichlorobenzene	ug/m3	_	-	<0.48	<2.4	<0.48	<2.4
o-Dichlorobenzene	ug/m3	_	300000	<0.19	<0.96	<0.19	<0.96
p-Dichlorobenzene	ug/m3	_	450000	<0.48	<2.4	<0.48	<2.4
trans-1,3-Dichloropropene	ug/m3	_	-	<0.73	<3.6	<0.73	<3.6
Ethanol	ug/m3	-	1900000	426 E	51.6	150 E	26.4
Ethylbenzene	ug/m3	-	435000	26	13	12	20
Ethyl Acetate	ug/m3	-	1400000	18	1.8 J	5.4	<2.9
4-Ethyltoluene	ug/m3	-	-	1.6	<3.9	0.64 J	<3.9
Freon 113	ug/m3	-	7600000	0.63	442	<0.61	28
Freon 114	ug/m3	-	7000000	<0.56	<2.8	<0.56	<2.8
Heptane	ug/m3	-	2000000	18	4.9	7.8	4.1
Hexachlorobutadiene	ug/m3	-	-	<0.77	<3.8	<0.77	<3.8
Hexane	ug/m3	-	1800000	4.2	2.0 J	3.5	1.8 J
2-Hexanone	ug/m3	-	410000	5.7	<3.3	2.8	<3.3
Isopropyl Alcohol	ug/m3	-	980000	18	12	9.8	11
Methylene chloride	ug/m3	60	86640	1.5	<2.8	6.3	<2.8
Methyl ethyl ketone	ug/m3	-	590000	15	11	8.6	10
Methyl Isobutyl Ketone	ug/m3	-	410000	21 ^a	<3.3	4.5	<3.3
Methyl Tert Butyl Ether	ug/m3	-	-	0.87	<2.9	0.40 J	<2.9
Methylmethacrylate	ug/m3	-	-	2.6	<3.3	<0.66	<3.3
Propylene	ug/m3	-	-	<0.69	<3.4	<0.69	<3.4
Styrene	ug/m3	-	212990	38	14	14	28
1,1,1-Trichloroethane	ug/m3	-	1900000	<0.44	174	<0.44	46
1,1,2,2-Tetrachloroethane	ug/m3	-	35000	<0.55	<2.7	<0.55	<2.7
1,1,2-Trichloroethane	ug/m3	-	45000	<0.44	<2.2	<0.44	<2.2
1,2,4-Trichlorobenzene	ug/m3	-	-	<0.59	<3.0	<0.59	<3.0
1,2,4-Trimethylbenzene	ug/m3	-	-	3	2.3 J	1.4	2.8 J
1,3,5-Trimethylbenzene	ug/m3	-	-	0.93	<3.9	0.49 J	<3.9
2,2,4-Trimethylpentane	ug/m3	-	-	4.6	2.4 J	2.7	1.9 J

Table 2 March 2019 Vapor Intrusion Sampling Results Macbeth - Kollmorgen Corporate Site New Windsor, New York

Client Sample ID:		NYSDOH		AA-2-031919	SG-2-031919	AA-3-031919	SG-3-031919
Lab Sample ID:		Air	OSHA	JC84841-1	JC84841-2	JC84841-4	JC84841-3
Date Sampled:		Guidance	TWA	3/19/2019	3/19/2019	3/19/2019	3/19/2019
Matrix:		Values ¹	PEL ²	Indoor Air	Soil Vapor	Indoor Air	Soil Vapor
Tertiary Butyl Alcohol	ug/m3	-	300000	37	4.5	18	7.6
Tetrachloroethylene	ug/m3	30	25000	4.5	2.5	3.9	146
Tetrahydrofuran	ug/m3	-	590000	1.6	<2.4	0.59	<2.4
Toluene	ug/m3	-	3770	132	66.3	72.7	75
Trichloroethylene	ug/m3	2	25000	0.54	3.9	0.97	<0.86
Trichlorofluoromethane	ug/m3	-	5600000	16	19	4.2	16
Vinyl chloride	ug/m3	-	-	<0.082	<0.41	<0.082	<0.41
Vinyl Acetate	ug/m3	-	-	<0.56	<2.8	<0.56	<2.8
m,p-Xylene	ug/m3	-	435000	93.4	43	39	70.8
o-Xylene	ug/m3	-	435000	51.7	24	23	42
Xylenes (total)	ug/m3	-	-	145	67.3	61.2	112

Notes:

- 1. NYSDOH Air Guidance Values: New York State Department of Health Air Guidance Values Updated August 2015 APPLICABLE TO INDOOR AIR ONLY.
- 2. OSHA TWA PEL: Occupational Safety and Health Administration Time Weighted Average Permissible Exporsure Limit APPLICABLE TO INDOOR AIR ONLY.
- -: NYSDOH Indoor Air Guidance Value or OSHA PEL does not exist
- < : Compound Not Detected at the Reporting Limit

Table 3

Summary of CVOC Concentrations in Sub-Slab Vapor 2006 to 2019

Macbeth - Kollmorgen Corporate Site New Windsor, New York

Sample ID	Compound	Table 3.1 NYSDOH Air Guideline Value	CVOC Concentration (December 2006)	CVOC Concentration (February 2008)	CVOC Concentration (February 2009)	CVOC Concentration (January 2010)	CVOC Concentration (January 2011)	CVOC Concentration (January 2012)	CVOC Concentration (January 2013)			
		μg/m ₃	μg/m ₃	μg/m ₃	μg/m ₃	μg/m ₃	μg/m ₃	μg/m ₃	μg/m ₃			
	TCE	2	860	8.17	5.27	2.74	8.6	6.45	8.01			
SG-2	PCE	30	8.1	24.3	4.61	3.39	0.814	0.543	17.9			
36-2	1,1,1-TCA	-	93	29.2	175	131	309	309	222			
	Total Targeted CVOCs	-	961.1	61.67	184.88	137.13	318.41	315.99	247.91			
	TCE	2	5.4	< 2.69	3.01	<5.37	1.45	1.13	1.02			
SG-3	PCE	30	6,000	501	448	454	830	558	525			
36-3	1,1,1-TCA		480	161	222	167	249	116	140			
	Total Targeted CVOCs	-	6,485	662	673.01	621	1,080.45	675.13	666.02			
Sample ID	Compound	Table 3.1 NYSDOH Air Guideline Value (AGV)	CVOC Concentration (January 2014)	CVOC Concentration (January 2015)	CVOC Concentration (January 2016)	CVOC Concentration (January 2017)	CVOC Concentration (January 2018)	CVOC Concentration (March 2019)	Final Concentration / Initial Concentration	Percent (%) Reduction		
				µg/m₃	µg/m₃	μg/m₃	μg/m₃	μg/m₃	μg/m₃	μg/m₃		
	TCE	2	4.6	6.4	5.9	5.9	6.4	3.90	0.0045	99.55		
SG-2	PCE	30	3.3	0.34	0.62	2.6	1.3	2.5	0.3086	69.14		
36-2	1,1,1-TCA	-	228	242	195	216	226	174	1.8710	-87.10		
	Total Targeted CVOCs	-	235.90	248.74	201.52	224.50	233.7	180.4	0.1877	81.23		
	TCE	2	0.59	0.86	1	0.91	1.5	< 0.86	0.1593	84.07		
SG-3	PCE	30	540	1,010	639	314	338	146	0.0243	97.57		
30-3	1,1,1-TCA		190	115	128	96	61.7	46	0.0958	90.42		
	Total Targeted CVOCs	-	730.59	1125.86	768	410.91	401.2	192.9	0.0297	97.03		

VOC = Volatile organic compounds

CVOC = Chlorinated volatile organic compounds

TCE = Trichloroethene

PCE = Tetrachloroethene

1,1,1-TCA = 1,1,1-Trichloroethane

μg/m₃ - micrograms per cubic meter

Table 3.1 - NYSDOH Air Guideline Values only apply to concentrations of VOCs in indoor and outdoor air. Final NYSDOH CEH BEEI Soil Vapor Intrusion Guidance, October 2006

Table 4
Comparison of TCE Results to Soil Vapor/Indoor Air Matrix A
March 2019 Vapor Intrusion Sampling Results Former Macbeth – Kollmorgen Corporate Site
New Windsor, New York

Matrix A - Trichlo	proethene (TCE)	Indoor Air	Indoor Air Concentration of Compound (μg/m³)			
3/19/2018 Sample Results (μg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 0.2	0.2 to < 1	1 and above		
AA-2 = 0.54 SG-2 = 3.9	< 6	1. No further action	2. No further action	Identify Source(s) and Resample or Mitigate		
	6 to < 60	4. No further action	5. MONITOR	6. MITIGATE		
	60 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE		
Matrix A Trichlo	roethene (TCE)	Indoor Air Concentration of Compound (µg/m³)				
3/19/2018 Sample Results (μg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 0.2	0.2 to < 1	1 and above		
AA-3 = 0.97 SG-3 = < 0.86	< 6	1. No further action	2. No further action	Identify Source(s) and Resample or Mitigate		
	6 to < 60	4. No further action	5. MONITOR	6. MITIGATE		
	60 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE		

Bold indicates recommended action

< : Result not detected above the Reporting Limit

SG: Sub-slab vapor sample AA: Indoor Air Sample

µg/m³: micrograms per cubic meter

No Further Action - No additional action is recommended to address human exposures (Soil Vapor/Indoor Air Matrix A, NYSDOH, May 2017).

Source: NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October 2006

Table 5
Comparison of PCE Results to Soil Vapor/Indoor Air Matrix B Results
March 2019 Vapor Intrusion Sampling Results Former Macbeth – Kollmorgen Corporate Site
New Windsor, New York

Matrix B - Tetrach	loroethene (PCE)	Indoor Air Concentration of Compound (µg/m³)			
3/19/2018 Sample Results (μg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 3	3 to < 10	10 and above	
AA-2 = 4.5 SG-2 = 2.5	< 100	1. No further action	2. No further action	Identify Source(s) and Resample or Mitigate	
	100 to < 1,000	4. No further action	5. MONITOR	6. MITIGATE	
	1,000 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE	
Matrix B - Tetrach	loroethene (PCE)	Indoor Air Concentration of Compound (μg/m³)			
3/19/2018 Sample Results (μg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 3	3 to < 10	10 and above	
	< 100	1. No further action	2. No further action	Identify Source(s) and Resample or Mitigate	
AA-3 = 3.9 SG-3 = 146	100 to < 1,000	4. No further action	5. MONITOR	6. MITIGATE	
	1,000 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE	

Bold indicates recommended action

SG: Sub-slab vapor sample
AA: Indoor Air Sample

µg/m³: micrograms per cubic meter

No Further Action - No additional action is recommended to address human exposures (Soil Vapor/Indoor Air Matrix A, NYSDOH, May 2017).

Monitor – Monitoring recommended (sampling on a recurring basis), including but not necessarily limited to sub-slab vapor, basement air and outdoor air sampling, to determine whether concentrations in the indoor air or sub-slab vapor have changed and/or to evaluate temporal influences. Monitoring might also be recommended to determine whether existing building conditions (e.g., positive pressure heating, ventilation and air-conditioning systems) are maintaining the desired mitigation endpoint and to determine whether changes are needed. The type and frequency of monitoring is determined based on site-, building- and analyte-specific information, taking into account applicable environmental data and building operating conditions. Monitoring is an interim measure required to evaluate exposures related to soil vapor intrusion until contaminated environmental media are remediated (Soil Vapor/Indoor Air Matrix B, NYSDOH, May 2017).

Source: NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October, 2006 NYSDOH Updates to Soil Vapor / Indoor Air Decision Matrices May, 2017

Table 6
Comparison of 1,1,1-Trichloroethane Results to Soil Vapor/Indoor Air Matrix B
March 2019 Vapor Intrusion Sampling Results Former Macbeth – Kollmorgen Corporate Site
New Windsor, New York

Matrix B - 1,1,1-	Trichloroethane	Indoor Air	Indoor Air Concentration of Compound (µg/m³)			
3/19/2018 Sample Results (μg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 3	3 to < 10	10 and above		
	< 100	1. No further action	2. No further action	Identify Source(s) and Resample or Mitigate		
AA-2 = < 0.44 SG-2 = 174	100 to < 1,000	4. No further action	5. MONITOR	6. MITIGATE		
	1,000 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE		
Matrix B - 1,1,1-	Trichloroethane	Indoor Air Concentration of Compound (µg/m³)				
3/19/2018 Sample Results (μg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 3	3 to < 10	10 and above		
AA-3 = < 0.44 SG-3 = 46	< 100	1. No further action	2. No further action	Identify Source(s) and Resample or Mitigate		
	100 to < 1,000	4. No further action	5. MONITOR	6. MITIGATE		
	1,000 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE		

Bold indicates recommended action

< : Result not detected above the Reporting Limit

SG: Sub-slab vapor sample

AA: Indoor Air Sample

μg/m³: micrograms per cubic meter

No Further Action - No additional action is recommended to address human exposures (Soil Vapor/Indoor Air Matrix A, NYSDOH, May 2017).

Source: NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October, 2006

Table 7
Comparison of cis-1,2-Dichloroethene (cis-1,2-DCE) Results to Soil Vapor/Indoor Air Matrix A
March 2019 Vapor Intrusion Sampling Results Former Macbeth – Kollmorgen Corporate Site
New Windsor, New York

Matrix A - cis-1,2	-Dichloroethene	Indoor Air Concentration of Compound (µg/m³)			
3/19/2018 Sample Results (µg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 0.2	0.2 to < 1	1 and above	
AA-2 = < 0.13 SG-2 = < 0.63	< 6	1. No further action	2. No further action	Identify Source(s) and Resample or Mitigate	
	6 to < 60	4. No further action	5. MONITOR	6. MITIGATE	
	60 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE	
Matrix A - cis-1,2	-Dichloroethene	Indoor Air Concentration of Compound (µg/m³)			
3/19/2018 Sample Results (µg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 0.2	0.2 to < 1	1 and above	
AA-3 = 2.9 SG-3 = < 0.63	< 6	1. No further action	2. No further action	3. Identify Source(s) and Resample or Mitigate	
	6 to < 60	4. No further action	5. MONITOR	6. MITIGATE	
	60 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE	

Bold indicates recommended action

< : Result not detected above the Reporting Limit

SG: Sub-slab vapor sample AA: Indoor Air Sample

µg/m³: micrograms per cubic meter

No Further Action - No additional action is recommended to address human exposures (Soil Vapor/Indoor Air Matrix A, NYSDOH, May 2017).

Identify Source(s) and Resample or Mitigate: Reasonable and practical actions be taken to identify the source(s) affecting the indoor air quality and that actions be implemented to reduce indoor air concentrations to within background ranges. For example, if an indoor or outdoor air source is identified, it is recommended that the approprAAte party implement actions to reduce the levels. In the event that indoor or outdoor sources are not readily identified or confirmed, resampling (which might include additional sub-slab vapor and indoor air sampling locations) is recommended to demonstrate that SVI mitigation actions are not needed.

Based on the information available, mitigation might also be recommended when soil vapor intrusion cannot be ruled out (Soil Vapor/Indoor Air Matrix A, NYSDOH, May 2017).

Source: NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October 2006 NYSDOH Updates to Soil Vapor / Indoor Air Decision Matrices May 2017

Table 8
Comparison of 1,1-Dichloroethene (1,1-DCE) Results to Soil Vapor/Indoor Air Matrix A
March 2019 Vapor Intrusion Sampling Results Former Macbeth – Kollmorgen Corporate Site
New Windsor, New York

Matrix A - 1,1-D	Dichloroethene	Indoor Air Concentration of Compound (µg/m³)					
3/19/2018 Sample Results (µg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 0.2	0.2 to < 1	1 and above			
AA-2 = < 0.13 SG-2 = < 0.63	< 6	1. No further action	2. No further action	Identify Source(s) and Resample or Mitigate			
	6 to < 60	4. No further action	5. MONITOR	6. MITIGATE			
	60 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE			
Matrix A - 1,1-D	Dichloroethene	Indoor Air	ir Concentration of Compound (μg/m³)				
3/19/2018 Sample Results (µg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 0.2	0.2 to < 1	1 and above			
AA-3 = < 0.13 SG-3 = < 0.63	< 6	1. No further action	2. No further action	Identify Source(s) and Resample or Mitigate			
	6 to < 60	4. No further action	5. MONITOR	6. MITIGATE			
	60 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE			

Bold indicates recommended action

< : Result not detected above the Reporting Limit

SG: Sub-slab vapor sample

AA: Indoor Air Sample

μg/m³: micrograms per cubic meter

No Further Action - No additional action is recommended to address human exposures (Soil Vapor/Indoor Air Matrix A, NYSDOH, May 2017).

Source: NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October 2006

Table 9
Comparison of Carbon Tetrachloride Results to Soil Vapor/Indoor Air Matrix A
March 2019 Vapor Intrusion Sampling Results Former Macbeth – Kollmorgen Corporate Site
New Windsor, New York

Matrix A - Carbo	n Tetrachloride	Indoor Air Concentration of Compound (µg/m³)				
3/19/2018 Sample Results (µg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 0.2	0.2 to < 1	1 and above		
AA-2 = 0.52 SG-2 = < 1.0	< 6	1. No further action	2. No further action	Identify Sources (s) and resample or mitigate		
	6 to < 60	4. No further action	5. MONITOR	6. MITIGATE		
	60 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE		
Matrix A - Carbo	n Tetrachloride	Indoor A	Air Concentration of Co	mpound (µg/m³)		
3/19/2018 Sample Results (µg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 0.2	0.2 to < 1	1 and above		
AA-3 = 0.49 SG-3 = < 1.0	< 6	1. No further action	2. No further action	Identify Sources (s) and resample or mitigate		
	6 to < 60	4. No further action	5. MONITOR	6. MITIGATE		
	60 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE		

Bold indicates recommended action

< : Result not detected above the Reporting Limit

SG: Sub-slab vapor sample

AA: Indoor Air Sample

μg/m³: micrograms per cubic meter

No Further Action - No additional action is recommended to address human exposures (Soil Vapor/Indoor Air Matrix A, NYSDOH, May 2017).

Source: NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October 2006

Table 10
Comparison of Methylene Chloride Results to Soil Vapor/Indoor Air Matrix B
March 2019 Vapor Intrusion Sampling Results Former Macbeth – Kollmorgen Corporate Site
New Windsor, New York

Matrix B - Meth	ylene Chloride	Indoor Air Concentration of Compound (µg/m³)					
3/19/2018 Sample Results (μg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 3	3 to < 10	10 and above			
AA-2 = 1.5 SG-2 = < 2.8	< 100	1. No further action	2. No further action	Identify Sources (s) and resample or mitigate			
	100 to < 1,000	4. No further action	5. MONITOR	6. MITIGATE			
	1,000 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE			
Matrix B - Meth	ylene Chloride	Indoor Air Concentration of Compound (μg/m³)					
3/19/2018 Sample Results (µg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 3	3 to < 10	10 and above			
AA-3 = 6.3 SG-3 = < 2.8	< 100	1. No further action	2. No further action	Identify Sources (s) and resample or mitigate			
	100 to < 1,000	4. No further action	5. MONITOR	6. MITIGATE			
	1,000 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE			

Bold indicates recommended action

< : Result not detected above the Reporting Limit

SG: Sub-slab vapor sample

AA: Indoor Air Sample

μg/m³: micrograms per cubic meter

No Further Action - No additional action is recommended to address human exposures (Soil Vapor/Indoor Air Matrix A, NYSDOH, May 2017).

Source: NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October 2006

Table 11
Comparison of Vinyl Chloride Results to Soil Vapor/Indoor Air Matrix C
March 2019 Vapor Intrusion Sampling Results Former Macbeth – Kollmorgen Corporate Site
New Windsor, New York

Matrix C - Vi	nyl Chloride	Indoor Air Concentration of Compound (µg/m³)							
3/19/2018 Sample Results (µg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 0.2	0.2 and above						
AA-2 = < 0.082 SG-2 = < 0.41	< 6 1. No further action		2. Identify Sources (s) and resample or mitigate						
	6 to < 60	3 Monitor	4. MITIGATE						
	60 and above	5. MITIGATE	6 MITIGATE						
Matrix C - Vi	nyl Chloride	Indoor Air Concentration of Compound (µg/m³)							
3/19/2018 Sample Results (μg/m³)	Sub-slab Vapor Concentration of Compound (µg/m³)	< 0.2	0.2 and above						
AA-3 = < 0.082 SG-3 = < 0.41	< 6	1. No further action	2. Identify Sources (s) and resample or mitigate						
	6 to < 60	3 Monitor	4. MITIGATE						
	60 and above	5. MITIGATE	6 MITIGATE						

Bold indicates recommended action

< : Result not detected above the Reporting Limit

SG: Sub-slab vapor sample AA: Indoor Air Sample

701. Indoor 711 Campic

μg/m³: micrograms per cubic meter

No Further Action - No additional action is recommended to address human exposures (Soil Vapor/Indoor Air Matrix A, NYSDOH, May 2017).

Source: NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October 2006



 www.erm.com
 Version: 1.0
 Project No.: 0501429.03
 Client: Fortive
 18 June 2019

NEW YORK STATE DEPARTMENT OF HEALTH INDOOR AIR QUALITY QUESTIONNAIRE AND BUILDING INVENTORY CENTER FOR ENVIRONMENTAL HEALTH

This form must be completed for each residence involved in indoor air testing.

Preparer's Name Date/Time Prepared 4249 Preparer's Affiliation ER M. 1900 Phone No. 631 756 8900 Purpose of Investigation Against VI and II Menitoring
1. OCCUPANT: Pat Industries
Interviewed: Y/N
Last Name: First Name:
Address: 617 Little Britain R& New Windson NY
County: Orange
Home Phone: Office Phone: 845 565 9300
Number of Occupants/persons at this location Age of Occupants 18 and older
2. OWNER OR LANDLORD: (Check if same as occupant)
Interviewed: Y/N
Last Name: Sack First Name: Sack
Address: Colt Little Britain Rd, New Windson WY
County: Omg
Home Phone: Office Phone: SUS 565 93CC
3. BUILDING CHARACTERISTICS
Type of Building: (Circle appropriate response)
Residential School Commercial/Multi-use Other:

If the property	is residential,	type?	(Circle	appropriate	response)

Ranch Raised Ranch Cape Cod Duplex Modular	2-Family Split Level Contemporary Apartment House Log Home	Colonial Mobile Home Townhouses/Condos Other:	_ N/A	
If multiple units, how ma	ny?		•	
If the property is commen	· -			
Business Type(s)	anufacture boxes	from purchased	Cardboard	papes
		If yes, how man		
Other characteristics:				
Number of floors 1	Buile	ling age <u>83</u>		
Is the building insulate	dYY)N How	air tight? Tight / Average	/Not Tight	
4. AIRFLOW Use air current tubes or t	racer smoke to evaluate a	irflow patterns and qualit	atively describe:	
Airflow between floors N/A				
Airflow near source Vacuer Negative a (Blower	blowers or in pressure /	monufacturing Constant dir	eguppent evchange	create
Outdoor air infiltration				
Infiltration into air ducts				

5.	BASEMENT A	AND	CONSTRUCTION	CHARACTERISTICS	(Circle all	that apply)
----	------------	-----	--------------	-----------------	-------------	-------------


a. Above grade constructi	on: wood fra	ame concrete	stone	brick		
b. Basement type:	full	crawlspac	ce slab	other		
c. Basement floor:	concrete	e dirt	stone	other		
d. Basement floor:	uncover	ed covered	covered w	ith		
e. Concrete floor:	unsealed	d sealed	sealed wit	h Orethane		
f. Foundation walls:	poured	block	stone	other		
g. Foundation walls:	unsealed	d sealed	sealed wit	h Painted		
h. The basement is:	wet	damp	dry	moldy		
i. The basement is:	finished	unfinishe	d partially f	inished		
j. Sump present?	(Y) N	5 pits ne Cleaning, L	ext to ephipm	nt for		
k. Water in sump?	Y / (not appli	icable	varected to so	we's		
Basement/Lowest level depth	below grade:	(feet)				
Identify potential soil vapor e	entry points and a	approximate size	(e.g., cracks, uti	llity ports, drains)		
< 1 1		Connect				
Jman 1	S) i (1. L	11 - 00=	loading dock		
c y posec	Slock town	carles w	ar Jen	TOURTHY GOEF		
6. HEATING, VENTING as	nd AIR CONDIT	TIONING (Circle	all that apply)			
Type of heating system(s) use	ed in this building	g: (circle all that	apply – note pri	mary)		
Hot air circulation	Heat pu	ımp (Ĩ	Hot water baseboa	ard		
Space Heaters	Stream	radiation I	Radiant floor	· · · · · · · · · · · · · · · · · · ·		
Electric baseboard	Wood s	tove (Outdoor wood bo	iler Other		
The primary type of fuel used	d is:					
Natural Gas	Fuel Oi	1 I	Kerosene			
Electric	Propane		Solar			
Wood	•					
Domestic hot water tank fuel	ed by:					
Boiler/furnace located in:						
	Basement	Outdoors	Main Floor	Other		

Are there air distribution ducts present? Y/N			
Describe the supply and cold air return ductwork, and it there is a cold air return and the tightness of duct joints. diagram.	s condition wh Indicate the lo	ere visible, incl ocations on the	luding whether floor plan
		Д	
7. OCCUPANCY			
Is basement/lowest level occupied? Full-time Oc	casionally Se	eldom A	Almost Never \mathcal{N}
Level General Use of Each Floor (e.g., familyr	oom, bedroom	, laundry, wor	kshop, storage)
Basement V/A			
	es to b	oxes and	office space
2nd Floor NA	for supplier.	Just folded	I Glued at facilit
3 rd Floor N/A			
4 th Floor N/A			
a THE CHARLES MAN ARE MAN INVESTIGATION OF A THE	OTIALITY		
8. FACTORS THAT MAY INFLUENCE INDOOR AIR	¢ QUALITY ∨	(A)	
a. Is there an attached garage?	v	/N/NA	
b. Does the garage have a separate heating unit?			
c. Are petroleum-powered machines or vehicles stored in the garage (e.g., lawnmower, atv, car)	P	N/NA lease specify	P Forklifts
d. Has the building ever had a fire?	Y	/ When?_	
e. Is a kerosene or unvented gas space heater present?			
f. Is there a workshop or hobby/craft area?	(Y/N W	Where & Type?	Maintenaire
g. Is there smoking in the building?			
h. Have cleaning products been used recently?	Y/N V	When & Type?	Zanitorial_
i. Have cosmetic products been used recently?			
LP (Liquid Propose) forklifts	usek t	hroughout	facility

j. Has painting/stai	ning been done in the last 6 mor	oths? Y N	Where & Who	en?
k. Is there new car	pet, drapes or other textiles?	Y/N	Where & Who	en?
l. Have air freshen	ers been used recently?	Y/N	When & Type	?
m. Is there a kitche	en exhaust fan?	Ø N	If yes, where	vented? W use &
n. Is there a bathr	oom exhaust fan?	(Ŷ) N	If yes, where	vented? ON Loos
o. Is there a clothes	dryer?	Y/X	If yes, is it ve	nted outside? Y / N
p. Has there been a	pesticide application?	Y/Ñ	When & Type	e?
Are there odors in If yes, please descr	the building? ribe:	Y /N	>	
(e.g., chemical manufa boiler mechanic, pesti	g occupants use solvents at work acturing or laboratory, auto mecha cide application, cosmetologist	nic or auto body		
If yes, what types of	f solvents are used? Water b	sused ink	used on cos	tens (IMFry)
If yes, are their clot	hes washed at work?	YN	,	or or we
Do any of the building response)	g occupants regularly use or wo	ork at a dry-clea	nning service?	(Circle appropriate
Yes, use dry-	cleaning regularly (weekly) cleaning infrequently (monthly or a dry-cleaning service	less)	No Unknown	
Is there a radon miti Is the system active of	gation system for the building/stor passive? Active/Passive	tructure? Y /(Ñ	Date of Instal	lation:
9. WATER AND SE	WAGE			
Water Supply:	Public Water Drilled Well	Driven Well	Dug Well	Other:
Sewage Disposal:	Public Sewer Septic Tank	Leach Field	Dry Well	Other:
10. RELOCATION	INFORMATION (for oil spill re	sidential emerg	gency)	
a. Provide reason	ns why relocation is recommend	ed:		
b. Residents choo	ose to: remain in home reloca	te to friends/fan	nily reloc	ate to hotel/motel
c. Responsibility	for costs associated with reimb	ırsement explai	ned? Y/N	1
d. Relocation pa	ckage provided and explained to	residents?	Y/N	1

11. FLOOR PLANS


Draw a plan view sketch of the basement and first floor of the building. Indicate air sampling locations, possible indoor air pollution sources and PID meter readings. If the building does not have a basement, please note.

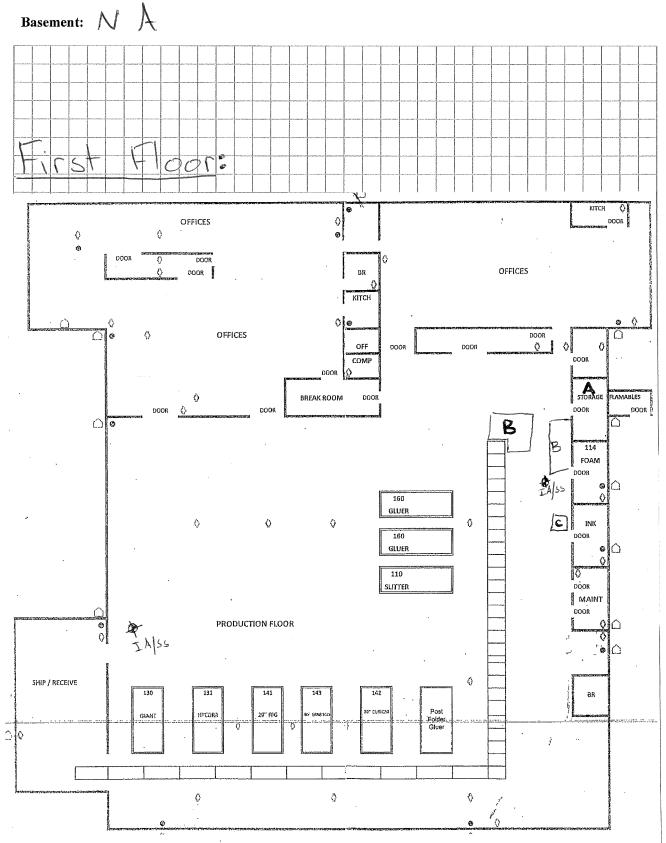

12. OUTDOOR PLOT

Draw a sketch of the area surrounding the building being sampled. If applicable, provide information on spill locations, potential air contamination sources (industries, gas stations, repair shops, landfills, etc.), outdoor air sampling location(s) and PID meter readings.

Also indicate compass direction, wind direction and speed during sampling, the locations of the well and septic system, if applicable, and a qualifying statement to help locate the site on a topographic map.

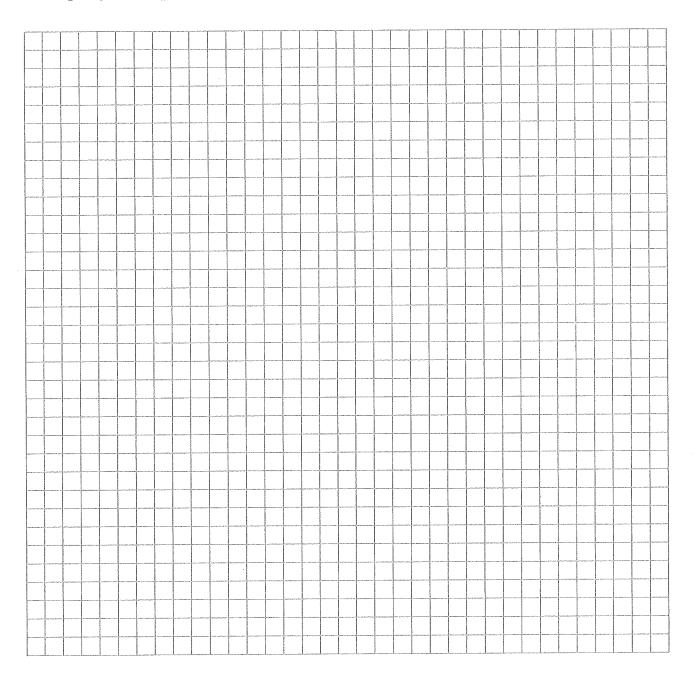

13. PRODUCT INVENTORY FORM

Make & Model of field instrument used:	\bigvee	Y	1	i. c	٠. i	R	Å	E	_	3	0	00	
----------------------------------------	-----------	---	---	------	------	---	---	---	---	---	---	----	--

List specific products found in the residence that have the potential to affect indoor air quality.

Location	Product Description	Size (units)	Condition*	Chemical Ingredients	Field Instrument Reading (units)	Photo ** Y/N
A	Sprayon Silicone	10	U	See SDS	0	1
A	Rustoleum Ultralauer	50	U		0	Ý
A	TAP Magic	13	U		0	1
B	J. M. Fy Ink	5 gal	uluo		0	1
C	3006-1500 Adhesive	Drum	uluo		0	γ
A	Quick Color Stray Right	्ठ १०	UO		0	4
<u>A</u>	Blaster Penetrating	n /1	uluo		0	У
B	Spec Meit Hot Meit Adhesive HM 801	Boxes	uluo		0	y
Å	Blostes Chain and Cable Lube	02/30	U		0	Y
A	Odorless Mnew Spirits	gal	U		0	Ÿ
A	W5-40	i gal	uluo		0	Ý
A	Oatley PVC Cenert	802	u		0	y
4	Oatley PVC Clear	8 02	U		0	Ϋ́
A	Denatured Alcohol	gal gal	U		0	7
A	Mobil Almo 525 Air Tool Oil) 6†	4/40		0	· y
A	Mobil Grease XHP 232	14 /5 or gel	uluo		0	Ý
A	Viking Dr. II Ultra SIP Lube ZEP Industrial Papple Cleaner Debreuse	400	U		0	1
A	ZEP Cleaner Debreuse	5 9a1	· u		0	y
A	Bernzonatic Propone	14 02	ulno	V	0	Ý

^{*} Describe the condition of the product containers as Unopened (UO), Used (U), or Deteriorated (D)

^{**} Photographs of the **front and back** of product containers can replace the handwritten list of chemical ingredients. However, the photographs must be of good quality and ingredient labels must be legible.

13. PRODUCT INVENTORY FORM

Make & Model of field instrument used:	(1	·);	nì.	K.	AE	300	0	

List specific products found in the residence that have the potential to affect indoor air quality.

Location	Product Description	Size (units)	Condition*	Chemical Ingredients	Field Instrument Reading (units)	Photo ** Y/N
A	Benzamatic MAP-Pro	14	Uluo	See SDS	0	Y
А	Valspæ Ant: Corrosion	19	U		0	Y
				v		
				·		

^{*} Describe the condition of the product containers as Unopened (UO), Used (U), or Deteriorated (D)


^{**} Photographs of the **front and back** of product containers can replace the handwritten list of chemical ingredients. However, the photographs must be of good quality and ingredient labels must be legible.

Product Inventory Photo Log







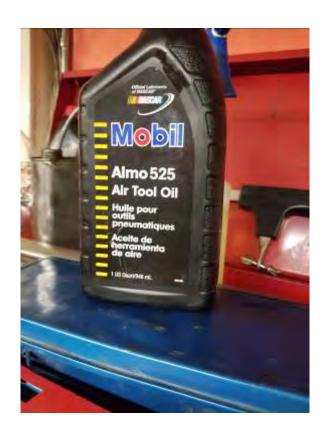



























































SAFETY DATA SHEET

1. Company and Product Identification

1.1	Identification – Product Name:	Super Bioclean 5G
1.2	Other means of identification	NA
1.2	Synonym:	NA
1.3	Recommended Use Of The Chemical	Cleaning agent
1.3	and Restrictions On Use:	
	Name, Address, And Telephone Number Of	Clean Print Chemicals
	The Manufacturer, Or Other Responsible	1590 N. Roberts Rd #201
1.4	Party:	Kennesaw, GA 30144
	Competent Person email address	NA
1.5	24 Hour Emergency No.:	770-425-3353
1.3		800-222-1222 (24-Hr, CHEMTREC)

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW: This product is a clear, green liquid with pine odor. Repeated exposure may cause skin dryness or cracking or minor irritation. The product is not flammable. Depending on the duration of over-exposure, breathing vapors may headache or dizziness, respiratory tract irritation. Thermal decomposition of this product may produce irritating vapors and toxic gases (e.g. carbon monoxide and carbon dioxide). Emergency responders must wear personal protective equipment (and have appropriate fire-extinguishing protection) suitable for the situation to which they are responding.

	Physical Hazards Summary	Not classifiable		
Potential Health Hazards Summary		Skin irritation, Category 2 Serious eye irritation, Category 2A		
Potent	ial Ecological Effects Summary	Not classifiable		
2.1	Classification Of Product			
	U.S. OSHA classification Classification as per EC 1272/2008 (CLP/GHS)	Skin irritation, Category 2 Serious eye irritation, Category 2		
	Hazardous Materials Information System (HMIS) Rating	Flammability	1 0 0 C	

Super Bioclean 5G Page 1 of 10

		Chronic Healt Hazard	h	
2.2	Label Elements OSHA/GHS			
	Signal Word	WARNING		
	Hazard Statements	H315 H319		kin irritation erious eye irritation
	Precautionary Statements: Prevention	P264 P280	Wear	proughly after handling protective gloves/protective clothing/eyon/face protection
	Precautionary Statements: Response	P305+P351+P338+P310 P337+P313 P302+P352 P321 P363	Remove corinsing. If eye irrita IF ON SKI Specific tre	ES rinse cautiously with water for several minutes contact lenses if present and easy to do – continue tation persists, get medical advice/attention KIN wash with soap and water reatment: See first aid section on this SDS naminated clothing before reuse
	Precautionary statements: Storage			
	Precautionary Statements: Disposal	P501		of contents/container in accordance with all federal, local regulation
	Hazard pictograms			
2.3	Unclassified Hazards	None		
2.4	Ingredients with unknown acute toxicity	None		

3. COMPOSITION and INFORMATION ON INGREDIENTS

Chemical name	% w/w	US OSHA	GHS/EU CLP
CAS#			
EINECS#			
Proprietary blend of surfactants, fragrances and enzymes	<10%	Flammable liquid, Category 3 Acute toxicity, Oral, Category 4 Acute toxicity, Inhal, Category 4 Acute toxicity, Dermal, Category 4 Skin irritation, Category 2 Eye irritation, Category 2A Aspiration toxicity, Category 1 Acute aquatic toxicity, Category 2 Chronic aquatic toxicity, Category 2 Respiratory sensitization, Category 1	Flammable liquid, Category 3 (H226) Acute toxicity, Oral, Category 4 (H302) Acute toxicity, Inhal, Category 4 (H332) Acute toxicity, Dermal, Category 4 (H312) Skin irritation, Category 2 (H315) Eye irritation, Category 2 (H319) Aspiration toxicity, Category 1 (H304) Acute aquatic toxicity, Category 2 (H401) Chronic aquatic toxicity, Category 2 (H411) Respiratory sensitization, Category 1 (H334)
Proprietary blend of solvents	<20%	Flammable liquid, Category 4 Acute toxicity, Oral, Category 4 Acute toxicity, Inhal, Category 4 Acute toxicity, Dermal, Category 4 Skin irritation, Category 2 Eye irritation, Category 2A	Acute toxicity, Oral, Category 4 (H302) Acute toxicity, Inhal, Category 4 (H332) Acute toxicity, Dermal, Category 4 (H312) Skin irritation, Category 2 (H315) Eye irritation, Category 2 (H319)
Ethanolamine (CAS 9007-33-4)	<5%	Flammable liquid, Category 4 Acute toxicity, Oral, Category 4	Acute toxicity, Oral, Category 4 (H302) Acute toxicity, Inhal, Category 4 (H332)

Super Bioclean 5G Page 2 of 10

		Acute toxicity, Inhal, Category 4	Acute toxicity, Dermal, Category 4 (H312)
		Acute toxicity, Dermal, Category 4	Skin corrosion, Category 1 (H314)
		Skin corrosion, Category 1	Serious eye damage, Category 1 (H318)
		Serious eye damage, Category 1	Specific target organ toxicity, Single exposure
		Specific target organ toxicity, Single	(Resp), Category 3 (H335)
		exposure (Resp), Category 3	Acute aquatic toxicity, Category 2 (H401)
		Acute aquatic toxicity, Category 2	Chronic aquatic toxicity, Category 3 (H412)
		Chronic aquatic toxicity, Category 3	
Water	Bulk	Not classifiable	Not classifiable

See Section 16 for Definitions of Terms Used.

The manufacturer claims Trade Secret Information as defined in 29CFR1910.1200 Appendix E and 29CFR1910.1200(i). All hazards have been accounted for in this product's hazard classification.

4. FIRST-AID MEASURES

4.1	Description of Necessary Measures	
	Skin exposure:	If this product contaminates the skin, immediately begin decontamination with running water. Remove exposed or contaminated clothing, taking care not to contaminate eyes. Victim should seek immediate medical attention if any adverse exposure symptoms develop or irritation persists.
	Eye exposure:	If this product enters the eyes, open victim's eyes while under gently running water. Use sufficient force to open eyelids. Have victim "roll" eyes. Minimum flushing is for 15 minutes. Seek medical attention immediately.
	Inhalation:	If this product is inhaled, remove victim to fresh air and place in a position comfortable for breathing. If necessary, use artificial respiration to support vital functions. Remove or cover gross contamination to avoid exposure to rescuers.
	Ingestion:	If this product is swallowed, CALL POISION CENTER or PHYSICIAN FOR MOST CURRENT INFORMATION. DO NOT INDUCE VOMITING. Have victim rinse mouth with water, if conscious. Never induce vomiting or give a diluent (e.g., water) to someone who is unconscious, having convulsions, or unable to swallow. If contaminated individual is convulsing, maintain an open airway and obtain immediate medical attention.
4.2	Most Important Symptoms/Effects:	Immediate: Symptoms of skin and eye contact may include redness and irritation. Ingestion may cause stomach pains, cramps, and gastritis.
		Delayed: Prolonged or repeated skin overexposure to this product may cause dermatitis (dry, red skin).
4.3	Indication Of Immediate Medical Attention And Special Treatment Needed, If Necessary:	None known. TARGET ORGANS: Acute: Eyes and Skin
Victim	g of chamical exposure must be taken for medic	al attention if any adverse effects occur. Resource should be taken for medical

Victims of chemical exposure must be taken for medical attention if any adverse effects occur. Rescuers should be taken for medical attention if necessary. Take a copy of label and SDS to physician or health professional with victim.

Super Bioclean 5G Page 3 of 10

5. FIRE-FIGHTING MEASURES

	Flammable properties	Not classifiable as flammable	NFPA RATING FLAMMABILITY OTHER See Section 16 for definitions of ratings
		Flash Point °C (°F): > 200 °F (> 93. Autoignition Temperature °C (°F): Flammable Limits (in air by volum	Not evaluated
5.1	Suitable And Unsuitable Extinguishing Media:	This material should not contribute material suitable for ordinary comb Water spray YES Foam YES Halon YES	e to the intensity of a fire. Use extinguishing pustibles. Carbon dioxide YES Dry chemical YES Other
5.2	Specific Hazards Arising From Chemical:	fumes and toxic gases (e.g., carbon Explosion Sensitivity to Mechanica	
5.3	Special Protective Equipment And Precautions For Fire-Fighters:	Incipient fire responders should we wear Self-Contained Breathing Ap containers from fire area if it can b	paratus and full protective equipment. Move be done without risk to personnel. If possible, ng storm drains, bodies of water, or other

6. ACCIDENTAL RELEASE MEASURES

6.1	Personal Precautions	Uncontrolled releases should be responded to only by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a spill, clear the affected area and protect people.
	Protective equipment	For small releases (< 20 liters, 5 gallons), clean up spilled liquid wearing gloves, goggles, face shield, and suitable body protection. Absorb with earth, sand or other non-combustible material and transfer to containers for proper disposal. The minimum Personal Protective Equipment recommended for response to non-incidental releases (more than 20 liters or 5 gallons) should be: triplegloves (neoprene gloves over nitrile gloves), chemical resistant suit and boots. Prevent further leak/release if it is safe to do so. Do not let the product enter drains.
	Emergency procedures	Eliminate all ignition sources. Stop leak if you can do so without risk.
6.2	Methods and Materials for Containment and Cleaning Up	Use absorbent material for cleaning up spills. Collect spilled material for proper disposal. Decontaminate the area thoroughly. Place all spill residues in a suitable container. Dispose of in accordance with applicable U.S. Federal,

Super Bioclean 5G Page 4 of 10

	State, or local procedures, or appropriate local standards (see Section 13,
	Disposal Considerations).

7. HANDLING and STORAGE

7.1	Precautions for Safe Handling	All employees who handle this material should be trained to handle it safely. Open containers carefully on a stable surface. Ensure all connections are tight before transfer. Empty containers may contain residual liquid; therefore, empty containers should be handled with care. Keep away from ignition sources; no smoking. As with all chemicals, avoid getting this product ON YOU or IN YOU. Wash thoroughly after handling this product. Do not eat or drink while handling this material. Remove contaminated clothing promptly.
		During equipment maintenance follow practices indicated in Section 6 (Accidental Release Measures) to decontaminate equipment or clean-up small spills. Make certain that application equipment is locked and tagged-out safely if necessary. Collect all rinsates and residual material and dispose of according to applicable U.S. Federal, State, or local procedures or appropriate local standards.
7.2	Conditions For Safe Storage	Keep containers tightly closed. Store individual containers out of direct sunlight. Tanks should be stored away from intense heat or direct sunlight. Avoid freezing. Store away from incompatible materials. Storage and use areas should be covered with impervious materials. Keep container tightly closed when not in use. If appropriate, post warning signs in storage and use areas. Inspect all incoming containers before storage, to ensure containers are properly labeled and not damaged.
	Incompatibilities	Oxidizers, strong oxidizing acids.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

	CHEMICAL NAME	CHEMICAL NAME CAS # % w/v			W EXPOSURE LIMITS IN AIR					
				ACGI	H-TLV	O	SHA-PEL (NIOS	SH)	OTHER	
				TWA	STEL	TWA	STEL	IDLH		
				ppm	ppm	ppm	ppm	ppm	ppm	
	Proprietary blend of surfactants, fragrances and enzymes	NA	<10%	NA	NA	NA(NA)	NA(NA)	NA		
	Proprietary blend of solvents	NA	<20%	NA	NA	NA(NA)	NA(NA)	NA		
İ	Ethanolamine	9007-33-4	<5%	3	6	3(3)	NA(6)	NA		
	No occupational exposure li			N. Cd	a		· · · · · · · · · · · · · · · · · · ·	11 1 (3	concentration present in	
	established for this product. I made to limit exposure to preven	Efforts should be		this product. A	All pertinent haz l Occupational ent Standards	zard information Safety and Hea	has been provide th Administration	d in this docume on Standard (29	ent, per the requirements CFR 1910.1200), U.S. Identification System	
8.2	Appropriate Engineering (Controls.		limits provid	ed in this	Section or	as low as re	easonably ac	nintained below the chievable. Ensure is product is used.	
8.3	Personal Protective Equipr	ment		None needed	under norm	nal conditions	of use. Use	NIOSH app	roved respirators in	
	Respiratory protection:			ventilation is use only pro 1910.134), a Oxygen level use of a full- respiratory P	inadequate to otection auth pplicable U s below 19.5 face piece I th auxiliary protection Sta	o control mist norized in the S. State reg 5% are consider pressure/dem self-contain and 29 C.	s or vapor. If the U.S. Feder gulations, or dered IDLH be and SCBA of the air supp FR 1910.134-	respiratory pral OSHA state applicably OSHA. In a full-face ly is require 1998).	orotection is needed. Standard (29 CFR le local standards a such atmospheres, piece, supplied aired under OSHA's	
		Eye pr	otection:						in OSHA 29 CFR blash hazards exist.	

Super Bioclean 5G Page 5 of 10

Hand protection:	Wear chemical impervious gloves (e.g., Solvex TM , Neoprene, Nitrile).
Body protection:	None normally needed. If needed, use body protection appropriate for task (e.g., Tyvek suit, rubber apron) to protect from splashes and sprays. Nomex coveralls are recommended for handling bulk product.

9. PHYSICAL and CHEMICAL PROPERTIES

Appearance	This product is a clear, green liquid.		
Odor	Pine-like	Odor Threshold	NE
Melting Point °C (°F)	Not evaluated	рН	11
Initial Boiling Point °C (°F)	179 °C (354 °F)	Boiling Point Range °C (°F)	Not evaluated
Flammability	Not flammable	Evaporation Rate (n-butyl acetate = 1)	Not evaluated
Vapor Density (air = 1)	Not evaluated	Vapor Pressure mm Hg @ 20°C:	Not evaluated
Solubility (in water)	Soluble	Relative density (water = 1)	1.0
Viscosity	Not evaluated	Oil-Water Partition Coefficient	NE
VOC	6.2g/L (0.052lb/gal)	HAP	5.1g/L (0.042lb/gal)
How To Detect This Substance (Warning Properties):	Pine like odor.		

10. STABILITY and REACTIVITY

10.1	Reactivity	Not considered reactive.
10.2	Chemical Stability	Stable under normal use and storage.
10.3	Possibility of hazardous reactions	Hazardous polymerization will not occur.
10.4	Conditions to avoid	Avoid mixing with incompatible materials.
10.5	Incompatible Materials	Strong oxidizers, Strong acids.
10.6	Hazardous Decomposition Products	Thermal decomposition of this product may generate carbon monoxide and carbon dioxide.

11. TOXICOLOGICAL INFORMATION

11.1 Toxicology Information

Note: This product has not been evaluated for its toxicity as a whole.

Component	Oral LD ₅₀ (mg/kg)	Dermal LD ₅₀ (mg/kg)	Inhalation LC ₅₀ (mg/m ³)	Skin Irritation	Serious eye damage
Proprietary blend of surfactants, fragrances and enzymes	No data available	No data available	No data available	YES	Irritation
Proprietary blend of solvents	No data available	No data available	No data available	YES	Irritation
Ethanolamine	1089 mg/kg (Rat)	1015 mg/kg (Rabbit)	No data available	YES	YES

Super Bioclean 5G Page 6 of 10

11.2: Carcinogenicity (IARC, ACGIH, NTP, OSHA)

None of the components are listed as carcinogenic by IARC, ACGIH, NTP or OSHA

11.3: Reproductive toxicity:

None of the components of this product are listed as reproductive toxins on the California Proposition 65 List.

12. ECOLOGICAL INFORMATION

ALL WORK PRACTICES MUST BE AIMED AT ELIMINATING ENVIRONMENTAL CONTAMINATION.

12.1 Ecological Information

Note: This product has not been evaluated for its ecologic impact as a whole.

Component	Toxicity to fish	Toxicity to daphnia	Bioaccumulation	Solubility	Biodegradability
Proprietary blend of surfactants, fragrances and enzymes	No data available	No data available	No data available	No data available	Readily biodegradable
Proprietary blend of solvents	No data available	No data available	Not expected	Soluble	Readily biodegradable
Ethanolamine	150 mg/L (LC50, 96 hr, carp)	65 mg/L (EC 50, 48 hr)	No data available	Soluble	Readily biodegradable

12.2	Persistence and Degradability	This product is expected to be readily biodegradable
12.3	Bioaccumulative Potential	This product is not expected to bioaccumulate
12.4	Mobility in Soil	When spilled onto soil, this product is expected to evaporate slowly.
12.5	Other Adverse Ecological Effects	This product may be harmful to aquatic life if large volumes of it are released into an aquatic environment.

13. DISPOSAL CONSIDERATIONS

Preparing Wastes of this Product for Disposal	Waste disposal must be in accordance with appropriate U.S. Federal, State, and local regulations or with local regulations.
Disposal of Contaminated Packaging	Cleaned containers can be recycled or disposed of as non-contaminated waste, if authorized by your local authorities. Dispose of containers as required by local regulations.
U.S. EPA Waste Number	D002

Super Bioclean 5G Page 7 of 10

14. TRANSPORT INFORMATION

THIS MATERIAL IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION. ALWAYS CONSULT LATEST REGULATIONS PRIOR TO SHIPPING FOR CHANGES!

US Domestic

14.1	UN Number	Not dangerous goods
14.2	UN Proper Shipping Name	
14.3	Transport Hazard Class(es)	
	Transport label(s) required	
14.4	Packing Group	
14.5	Marine Pollutant	
	NA Emergency Response Guide	
	Number (2012)	
	Reportable Quantity (RQ)	

International Air Transport Association

14.6	UN Number	Not dangerous goods
	UN Proper Shipping Name	
	Transport Hazard Class(es)	
	Transport label(s) required	
	Packing Group	
	Marine Pollutant	
	Packaging Instructions	

International Maritime Organization

14.7	UN Number	Not dangerous goods
	UN Proper Shipping Name	
	Transport Hazard Class(es)	
	Transport label(s) required	
	Packing Group	
	Marine Pollutant	
	NA Emergency Response Guide	
	Number (2012)	

15. SAFETY, HEALTH and ENVIRONMENTAL REGULATIONS SPECIFIC FOR THE PRODUCT

PROGRAM	Super Bioclean 5G
Clean Air Act Hazardous Air Pollutants	NO
Safe Drinking Water Act	NO
RCRA F, K, P, U or D-lists	NO
SARA 302 EHS RQ	NO
SARA 302 EHS TPQ	NO
CERCLA RQ (lbs)	NO
SARA 313 LISTED	NO
SARA 311/312 ACUTE	YES
SARA 311/312 CHRONIC	NO
SARA 311/312 FIRE	NO

Super Bioclean 5G Page 8 of 10

SARA 311/312 PRESSURE	NO
CADA 211/212	
SARA 311/312 REACTIVITY	NO
EPA EXTREMELY HAZARDOUS SUBSTANCE	NO
PEL	NO
PSM	NO
DHS CFATS STQ (Flammable Release)	NO
DEA Controlled Substances	NO
DSL	NOTE 1
NDSL	NOTE 1
REACH Pre-registered	
List	NOTE 1
TSCA (Public)	NOTE 1
European Inventory of	TOTET
Existing Commercial Chemical Substances (EINECS)	NO
EU No-Longer Polymers List (NLP)	NO
EEC Classification Packaging, and Labeling of Dangerous Substances(Annex 1)	YES
Philippines	NE
Japan	NE
Australia	NOTE 2
Korea	NE
	NIE
China	NE

NOTE 1: Some components of this product are listed in the Canadian DSL/NDSL, REACH and US TSCA publicly available list. NOTE 2: Not hazardous under NOHSC: 1008(2004), 3^{rd} Edition.

16. OTHER INFORMATION

16.1	Original Preparation	14 November 2016
16.2	Revision History	1.0: 14 February 2017
16.3	Prepared by	Christopher Bright 2/530 Boundary Road
		Derrimut
164	Date of Printing	February 16, 2017

16.5	A large number of abbreviations and acronyms appear on a MSDS. Some of these which are commonly used include the following:				
	Section 2	GHS: Global Harmonization System			
		OSHA: U.S. Occupational Safety and Health Administration.			
		CLP: Classification and Packaging			
		WHMIS: Workplace Hazardous Materials Information System			
		STOT: Specific Target Organ Toxicity			
	Section 3	CAS #: Chemical Abstract Service index number			
		EINECS #: European Chemical Substances Information System index number			
	Section 5	NFPA: Nation Fire Protection Association			
		Health Hazard: 0 (material that on exposure under fire conditions would offer no hazard beyond that of ordinary combustible			
		materials); 1 (materials that on exposure under fire conditions could cause irritation or minor residual injury); 2 (materials that			

DEFINITIONS OF TERMS

Super Bioclean 5G Page 9 of 10

		on intense or continued exposure under fire conditions could cause temporary incapacitation or possible residual injury); 3			
		(materials that can on short exposure could cause serious temporary or residual injury); 4 (materials that under very short			
		exposure could cause death or major residual injury). Flammability Hazard			
		Reactivity Hazard: Refer to definitions for "Hazardous Materials Identification System".			
		Flash Point: Minimum temperature at which a liquid gives off sufficient vapors to form an ignitable mixture with air.			
		Autoignition Temperature: The minimum temperature required to initiate combustion in air with no other source of ignition. LEL: The lowest percent of vapor in air, by volume, that will explode or ignite in the presence of an ignition source. UEL:			
		The highest percent of vapor in air, by volume, that will explode or ignite in the presence of an ignition source. The highest percent of vapor in air, by volume, that will explode or ignite in the presence of an ignition source.			
	Section 8	ACGIH - American Conference of Governmental Industrial Hygienists, a professional association which establishes exposure			
	Section 6	limits.			
		TLV - Threshold Limit Value - an airborne concentration of a substance which represents conditions under which it is generally			
		believed that nearly all workers may be repeatedly exposed without adverse effect. The duration must be considered, including the 8-hour Time Weighted Average (TWA), the 15-minute Short Term Exposure Limit, and the instantaneous Ceiling Level (C). Skin absorption effects must also be considered			
		PEL - Permissible Exposure Limit - This exposure value means exactly the same as a TLV, except that it is enforceable by			
		OSHA. The OSHA Permissible Exposure Limits are based in the 1989 PELs and the June, 1993 Air Contaminants Rule (Federal Register: 58: 35338-35351 and 58: 40191). Both the current PELs and the vacated PELs are indicated. The phrase,			
		"Vacated 1989 PEL," is placed next to the PEL which was vacated by Court Order.			
		IDLH - Immediately Dangerous to Life and Health - This level represents a concentration from which one can escape within			
		30-minutes without suffering escape-preventing or permanent injury. The DFG - MAK is the Republic of Germany's			
		Maximum Exposure Level, similar to the U.S. PEL. NIOSH is the National Institute of Occupational Safety and Health, which			
		is the research arm of the U.S. Occupational Safety and Health Administration (OSHA). NIOSH issues exposure guidelines			
		called Recommended Exposure Levels (RELs). When no exposure guidelines are established, an entry of NE (Not			
		Established) is made for reference.			
	Section 11	LD ₅₀ : Lethal Dose (solids & liquids) which kills 50% of the exposed animals;			
		LC ₅₀ : Lethal Concentration (gases) which kills 50% of the exposed animals;			
		ppm: Concentration expressed in parts of material per million parts of air or water;			
		mg/m ³ : Concentration expressed in weight of substance per volume of air;			
		mg/kg: Quantity of material, by weight, administered to a test subject, based on their body weight in kg			
		IARC - the International Agency for Research on Cancer;			
		NTP - the National Toxicology Program,			
		RTECS - the Registry of Toxic Effects of Chemical Substances,			
		OSHA and CAL/OSHA.			
		IARC and NTP rate chemicals on a scale of decreasing potential to cause human cancer with rankings from 1 to 4. Subrankings			
		(2A, 2B, etc.) are also used.			
		TDLo, the lowest dose to cause a symptom and			
		TCLo the lowest concentration to cause a symptom;			
		TDo, LDLo, and LDo, or TC, TCo, LCLo, and LCo, the lowest dose (or concentration) to cause lethal or toxic effects.			
		BEI - Biological Exposure Indices, represent the levels of determinants which are most likely to be observed in specimens			
		collected from a healthy worker who has been exposed to chemicals to the same extent as a worker with inhalation exposure			
		to the TLV.			
	Section 12	LC ₅₀ : The lowest concentration in water which kills 50% of the test subjects.			
	Section 12	EC ₅₀ : The lowest concentration in water which kins 30% of the test subjects. EC ₅₀ : The Effect Concentration in water at which 50% of the test species if affected.			
	Section 13	US EPA Hazardous Waste Codes: refer to 40 CFR 261.20			
	Section 14	DOT: US Department of Transportation			
	Section 1.	IATA: International Air Transport Association			
		IMO: International Maritime Organization			
		MARPOL: International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978			
		IBC Code: Merchant Shipping Code			
	Section 15	RCRA: US Resource Conservation and Recovery Act			
		SARA: US Superfund Amendments and Reauthorization Act			
		PSM: US OSHA Process Safety Management			
		CFATS: US Department of Homeland Security Chemical Facility Anti-terrorism Standard			
		DSL: Canadian Domestic Substances List			
		NDSL: Canadian Non-Domestic Substances List			
		REACH : European Registration, Evaluation, Authorization and Restriction of Chemicals list			
		TSCA: US Toxic Substances Control Act			
	1	15CA, OS TOAK SUBSTAIRES CONTROL ACT			

H Phrases

H317: May cause an allergic skin reaction

H225: Highly flammable liquid and vapor
H226: Flammable liquid and vapor
H335: May case respiratory irritation
H304: May be fatal if swallowed and enters airways
H401: Toxic to aquatic life

H304: May be fatal if swallowed and enters airways

H401: Toxic to aquatic life

H314: Causes severe skin burns and eye damage

H402: Harmful to aquatic life

H315: Causes skin irritation H412: Harmful to aquatic life with long lasting effects

Super Bioclean 5G Page 10 of 10



Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012 Date of issue: 11/09/2016 Revision date: 11/30/2016 Version: 1.0

SECTION 1: Identification

Identification

: Chain and Cable Lube Product name

Product code : 16-CCL

Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Multi-Purpose Lubricant

Details of the supplier of the safety data sheet

Manufacturer

The Blaster Corporation 8500 Sweet Valley Drive Valley View, Ohio 44125 - USA T (216) 901-5800 - F (216) 901-5801 www.blastercorp.com

Emergency telephone number

Emergency number : ChemTel 800-255-3924

SECTION 2: Hazard(s) identification

Classification of the substance or mixture

GHS-US classification

Flam. Aerosol 2 Dissolved gas Asp. Tox. 1

2.2. Label elements

GHS-US labelling

Hazard pictograms (GHS-US)





GHS02

GHS04

GHS08

Signal word (GHS-US)

Hazard statements (GHS-US)

: Danger

: Flammable aerosol. Contains gas under pressure; may explode if heated. May be fatal if

swallowed and enters airways.

Precautionary statements (GHS-US)

Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. If swallowed: Immediately call a poison center/doctor. Do NOT induce vomiting. Store locked up. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Dispose of contents/container in accordance with local, regional. national and/or international regulation.

Other hazards

No additional information available

Unknown acute toxicity (GHS US)

Not applicable

SECTION 3: Composition/information on ingredients

3.1. **Substances**

Not applicable

11/30/2016 EN (English) Page 1



Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

3.2. Mixtures

Name	Product identifier	%
Distillates, petroleum, hydrotreated light naphthenic	(CAS No) 64742-53-6	50 - 60
Petroleum distillates, hydrotreated light	(CAS No) 64742-47-8	40 - 50
Carbon dioxide	(CAS No) 124-38-9	1 - 4

^{*}Chemical name, CAS number and/or exact concentration have been withheld as a trade secret

SECTION 4: First aid measures

4.1. Description of first aid measures

First-aid measures after inhalation

: If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical advice/attention if you feel unwell.

First-aid measures after skin contact

: If irritation occurs, flush skin with plenty of water. Get medical attention if irritation persists.

First-aid measures after eye contact

: In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. If easy to do, remove contact lenses, if worn. If irritation persists, get medical attention.

First-aid measures after ingestion

: IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. Do NOT induce vomiting.

4.2. Most important symptoms and effects, both acute and delayed

Symptoms/injuries after inhalation

: May cause respiratory irritation.

Symptoms/injuries after skin contact

: May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the

skin.

Symptoms/injuries after eye contact

: May cause eye irritation. Symptoms may include discomfort or pain, excess blinking and tear

production, with possible redness and swelling.

Symptoms/injuries after ingestion

: May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea or vomiting.

4.3. Indication of any immediate medical attention and special treatment needed

Symptoms may not appear immediately. In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).

SECTION 5: Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media : Carbon dioxide, dry chemical, halons or foam.

Unsuitable extinguishing media : Do not use water jet.

5.2. Special hazards arising from the substance or mixture

Fire hazard

: Flammable aerosol. Products of combustion may include, and are not limited to: oxides of carbon and oxides of nitrogen.

Explosion hazard

 Heat may build pressure, rupturing closed containers, spreading fire and increasing risk of burns and injuries.

Reactivity

: No dangerous reaction known under conditions of normal use.

5.3. Advice for firefighters

Firefighting instructions

: DO NOT fight fire when fire reaches explosives. Evacuate area.

Protection during firefighting

: Keep upwind of fire. Wear full fire fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA). Vapors may be heavier than air and may travel along the ground to a distant ignition source and flash back. Use water spray to keep fire-exposed containers cool.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures

: Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Isolate from fire, if possible, without unnecessary risk. Remove ignition sources. Use special care to avoid static electric charges.

6.1.1. For non-emergency personnel

No additional information available

6.1.2. For emergency responders

No additional information available

6.2. Environmental precautions

No additional information available

11/30/2016 EN (English) 2/6



Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

6.3. Methods and material for containment and cleaning up

For containment : Contain and/or absorb

: Contain and/or absorb spill with inert material (e.g. sand, vermiculite), then place in a suitable container. Do not flush to sewer or allow to enter waterways. Use appropriate Personal

Protective Equipment (PPE).

Methods for cleaning up : Scoop up material and place in a disposal container. Provide ventilation.

6.4. Reference to other sections

See section 8 for further information on protective clothing and equipment and section 13 for advice on waste disposal.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Additional hazards when processed : Hazardous waste due to potential risk of explosion. Pressurized container: Do not pierce or

burn, even after use

Precautions for safe handling : Do not spray on an open flame or other ignition source. Keep away from sources of ignition -

No smoking. Use non-sparking tools. Use explosion-proof equipment. Take precautionary measures against static discharge. Avoid contact with skin and eyes. Do not swallow. Do not breathe gas, fumes, vapor or spray. When using do not eat, drink or smoke. Use only outdoors

or in a well-ventilated area. Do not pierce or burn, even after use.

Hygiene measures : Launder contaminated clothing before reuse. Wash hands before eating, drinking, or smoking.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : Proper grounding procedures to avoid static electricity should be followed.

Storage conditions : Keep locked up and out of reach of children. Do not expose to temperatures exceeding 50 °C/

122 °F. Store away from direct sunlight or other heat sources. Keep in fireproof place.

Storage area : Store in a well-ventilated place.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Not applicable

Petroleum distillates, hydrotreated light (64742-47-8)

Not applicable

Carbon dioxide (124-38-9)			
ACGIH	ACGIH TWA (ppm)	5000 ppm	
ACGIH	ACGIH STEL (ppm)	30000 ppm	
OSHA	OSHA PEL (TWA) (mg/m³)	9000 mg/m³	
OSHA	OSHA PEL (TWA) (ppm)	5000 ppm	

8.2. Exposure controls

Appropriate engineering controls : Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapor, etc.) below

recommended exposure limits.

Hand protection : Wear chemically resistant protective gloves.

Eye protection : Safety glasses or goggles are recommended when using product.

Skin and body protection : Wear suitable protective clothing.

Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment. Respirator selection

must be based on known or anticipated exposure levels, the hazards of the product and the

safe working limits of the selected respirator.

Environmental exposure controls : Maintain levels below Community environmental protection thresholds.

Other information : Do not eat, smoke or drink where material is handled, processed or stored. Wash hands

carefully before eating or smoking. Handle according to established industrial hygiene and safety practices.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state : Liquid

Appearance : Hazy Liquid. Aerosol.

Colour : Milky

11/30/2016 EN (English) 3/6



Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Odour : Mild aliphatic Odour threshold : No data available No data available Melting point : No data available : No data available Freezing point Boiling point : 380 °F / 193°C : 148 °F / 64 °C Flash point Relative evaporation rate (butylacetate=1) No data available Flammability (solid, gas) : Flammable aerosol. Vapor pressure : No data available Relative vapor density at 20 °C : No data available

Relative density : 0.84

Solubility No data available Partition coefficient n-octanol/water : No data available : No data available Auto-ignition temperature Decomposition temperature : No data available Viscosity, kinematic : No data available Viscosity, dynamic No data available Explosive limits No data available : No data available Explosive properties : No data available Oxidising properties

9.2. Other information

Heat of Combustion : 49.7 kJ/g
Flame Projection : 0 inches
Flashback : None

SECTION 10: Stability and reactivity

10.1. Reactivity

No dangerous reaction known under conditions of normal use.

10.2. Chemical stability

Stable under normal storage conditions. Flammable aerosol. Contents under pressure. Container may explode if heated. Do not puncture. Do not burn. Extreme risk of explosion by shock, friction, fire or other sources of ignition.

10.3. Possibility of hazardous reactions

No dangerous reaction known under conditions of normal use.

10.4. Conditions to avoid

Sources of ignition. Heat. Incompatible materials.

10.5. Incompatible materials

Strong oxidizing agents.

10.6. Hazardous decomposition products

May include, and are not limited to: oxides of carbon and oxides of nitrogen.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Not classified.

Chain and Cable Lube			
LD50 oral rat	> 2000 mg/kg (Calculated Acute Toxicity Estimate)		
LD50 dermal rabbit	> 2000 mg/kg (Calculated Acute Toxicity Estimate)		
LC50 inhalation rat	> 5 mg/l/4h (Calculated Acute Toxicity Estimate)		

Petroleum distillates, hydrotreated light (64742-47-8)		
LD50 oral rat	> 5000 mg/kg	



Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Petroleum distillates, hydrotreated light (64742-47-8)					
LD50 dermal rabbit	> 2000 mg/kg				
LC50 inhalation rat	> 5.2 mg/l/4h				
Skin corrosion/irritation	: Not classified.				
Serious eye damage/irritation	: Not classified.				
Respiratory or skin sensitisation	: Not classified.				
Germ cell mutagenicity	: Not classified.				
Carcinogenicity	: Not classified.				
Reproductive toxicity	: Not classified.				
Specific target organ toxicity (single exposure)	: Not classified.				
Specific target organ toxicity (repeated exposure)	: Not classified.				
Aspiration hazard	: May be fatal if swallowed and enters airways.				
Symptoms/injuries after inhalation	: May cause respiratory irritation.				
Symptoms/injuries after skin contact	: May cause skin irritation. Symptoms may include redness, drying, defatting and cracking of the skin.				
Symptoms/injuries after eye contact	: May cause eye irritation. Symptoms may include discomfort or pain, excess blinking and tear production, with possible redness and swelling.				
Symptoms/injuries after ingestion	: May be fatal if swallowed and enters airways. This product may be aspirated into the lungs and cause chemical pneumonitis. May cause stomach distress, nausea or vomiting.				
Other information	: Likely routes of exposure: ingestion, inhalation, skin and eye.				

SECTION 12: Ecological information

12.1. Toxicity

Ecology - general : May be toxic to aquatic life.

Distillates, petroleum, hydrotreated light naphthenic (64742-53-6)			
LC50 fish 1 > 5000 mg/l (Exposure time: 96 h - Species: Oncorhynchus mykiss)			
EC50 Daphnia 1 > 1000 mg/l (Exposure time: 48 h - Species: Daphnia magna)			
Petroleum distillates, hydrotreated light (64742-47-8)			
LC50 fish 1	45 mg/l (Exposure time: 96 h - Species: Pimephales promelas [flow-through])		
LC50 fish 2 2.2 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus [static])			

12.2. Persistence and degradability

Chain and Cable Lube		
Persistence and degradability	Not established.	

12.3. Bioaccumulative potential

Chain and Cable Lube			
Bioaccumulative potential Not established.			
Petroleum distillates, hydrotreated light (64742-47-8)			
BCF fish 1 61 - 159			
Carbon dioxide (124-38-9)			
BCF fish 1	(no bioaccumulation)		

12.4. Mobility in soil

No additional information available

12.5. Other adverse effects

Effect on the global warming : No known effects from this product.





Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Waste disposal recommendations : This material must be disposed of in accordance with all local, state, provincial, and federal

regulations. The generation of waste should be avoided or minimized wherever possible.

Additional information : Flammable vapours may accumulate in the container.

SECTION 14: Transport information

Department of Transportation (DOT)

In accordance with DOT

Transport document description : UN1950 Aerosols (flammable, (each not exceeding 1 L capacity)), 2.1

UN-No.(DOT) : UN1950
Proper Shipping Name (DOT) : Aerosols

flammable, (each not exceeding 1 L capacity)

Class (DOT) : 2.1 - Class 2.1 - Flammable gas 49 CFR 173.115

Hazard labels (DOT) : 2.1 - Flammable gas



Other information : No supplementary information available.

Special transport precautions : Do not handle until all safety precautions have been read and understood.

SECTION 15: Regulatory information

15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory.

15.2. International regulations

No additional information available

15.3. US State regulations

California Proposition 65 - This product does not contain any substances known to the state of California to cause cancer, developmental and/or reproductive harm

Carbon dioxide (124-38-9)

U.S. - New Jersey - Right to Know Hazardous Substance List

U.S. - Pennsylvania - RTK (Right to Know) List

SECTION 16: Other information

Date of issue : 11/09/2016
Revision date : 11/30/2016
Other information : None.

Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.



Date Printed: 11/4/2015 Page 1 / 6

Safety Data Sheet



1. Identification

Product Name: PVTLBL SSPR 12PK QUICKC FLAT BLACK **Revision Date:** 11/4/2015

Product Identifier: J2853812 Supercedes Date: 9/3/2015

Product Use/Class: Topcoat/Aerosols

Rust-Oleum Corporation Rust-Oleum Corporation Supplier: Manufacturer:

11 Hawthorn Parkway Vernon Hills, IL 60061

USA

11 Hawthorn Parkway

Vernon Hills, IL 60061

USA

Preparer: Regulatory Department

24 Hour Hotline: 847-367-7700 **Emergency Telephone:**

2. Hazard Identification

Classification

Symbol(s) of Product









Signal Word

Danger

Possible Hazards

85% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

Acute Toxicity, Inhalation, category 4 H332 Harmful if inhaled. Carcinogenicity, category 1B H350 May cause cancer.

H280 Compressed Gas Contains gas under pressure; may explode if heated.

Eye Irritation, category 2 H319 Causes serious eye irritation. Flammable Aerosol, category 1 H222 Extremely flammable aerosol. Germ Cell Mutagenicity, category 1B H340 May cause genetic defects.

STOT, repeated exposure, category 2 H373 May cause damage to organs through prolonged or repeated exposure.

STOT, single exposure, category 3, NE H336 May cause drowsiness or dizziness.

GHS LABEL PRECAUTIONARY STATEMENTS

P201 Obtain special instructions before use.

P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. NO

SMOKING.

P211 Do not spray on an open flame or other ignition source.

P251 Do not pierce or burn, even after use.

P260 Do not breathe dust, fumes, gases, mists, vapors, or spray.

P281 Use personal protective equipment as required.

P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if

present and easy to do. Continue rinsing.

P308+P313 IF exposed or concerned: Get medical advice/attention. Date Printed: 11/4/2015 Page 2 / 6

P312 Call a POISON CENTER or doctor/physician if you feel unwell.

P337+P313 If eye irritation persists: Get medical advice/attention.

P403+P233 Store in a well-ventilated place. Keep container tightly closed.

P410+P403 Protect from sunlight. Store in a well-ventilated place.

P410+P412 Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F.

3. Composition/Information On Ingredients

HAZARDOUS SUBSTANCES

<u>Chemical Name</u>	CAS-No.	Wt.% Range	GHS Symbols	GHS Statements
Acetone	67-64-1	25-50	GHS02-GHS07	H225-319-332-336
Propane	74-98-6	10-25	GHS04	H280
n-Butane	106-97-8	10-25	GHS04	H280
Hydrous Magnesium Silicate	14807-96-6	2.5-10	No Information	No Information
Xylene (mixed isomers)	1330-20-7	2.5-10	GHS02-GHS07	H226-315-319-332
Hydrotreated Light Distillate	64742-47-8	2.5-10	GHS08	H304
Naphtha, Petroleum, Hydrotreated Light	64742-49-0	1.0-2.5	GHS08	H304-340-350
Ethylbenzene	100-41-4	1.0-2.5	GHS02-GHS07- GHS08	H225-304-332-373
Aliphatic Hydrocarbon	64742-89-8	1.0-2.5	GHS08	H304-340-350
Carbon Black	1333-86-4	0.1-1.0	No Information	No Information
Solvent Naphtha, Light Aromatic	64742-95-6	0.1-1.0	GHS07-GHS08	H304-332-340-350
Ethylene Glycol Monobutyl Ether	111-76-2	0.1-1.0	GHS06	H302-310-315-319-330

4. First-aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR!Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

6. Accidental Release Measures

Date Printed: 11/4/2015 Page 3 / 6

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only in a well-ventilated area. Use only with adequate ventilation. Follow all MSDS/label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing. STORAGE: Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of NFPA Class I flammable liquids. Keep away from heat, sparks, flame and sources of ignition. Contents under pressure. Do not expose to heat or store above 120 ° F. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

8. Exposure Controls/Personal Protection

Chemical Name	CAS-No.	Weight % Less Than	ACGIH TLV- TWA	ACGIH TLV- STEL	OSHA PEL-TWA	OSHA PEL- CEILING
Acetone	67-64-1	40.0	250 ppm	500 ppm	1000 ppm	N.E.
Propane	74-98-6	25.0	N.E.	N.E.	1000 ppm	N.E.
n-Butane	106-97-8	15.0	N.E.	1000 ppm	N.E.	N.E.
Hydrous Magnesium Silicate	14807-96-6	10.0	2 mg/m3	N.E.	N.E.	N.E.
Xylene (mixed isomers)	1330-20-7	10.0	100 ppm	150 ppm	100 ppm	N.E.
Hydrotreated Light Distillate	64742-47-8	5.0	N.E.	N.E.	N.E.	N.E.
Naphtha, Petroleum, Hydrotreated Light	64742-49-0	5.0	N.E.	N.E.	N.E.	N.E.
Ethylbenzene	100-41-4	5.0	20 ppm	N.E.	100 ppm	N.E.
Aliphatic Hydrocarbon	64742-89-8	5.0	N.E.	N.E.	N.E.	N.E.
Carbon Black	1333-86-4	1.0	3 mg/m3	N.E.	3.5 mg/m3	N.E.
Solvent Naphtha, Light Aromatic	64742-95-6	1.0	N.E.	N.E.	N.É.	N.E.
Ethylene Glycol Monobutyl Ether	111-76-2	1.0	20 ppm	N.E.	50 ppm	N.E.

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Use impervious gloves to prevent skin contact and absorption of this material through the skin. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications. Refer to safety supervisor or industrial hygienist for further information regarding personal protective equipment and its application.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

Date Printed: 11/4/2015 Page 4 / 6

9. Physical and Chemical Properties

Appearance: **Physical State:** Aerosolized Mist Liquid Odor: Odor Threshold: Solvent Like N.E. **Relative Density:** 0.711 pH: N.A. Freeze Point, °C: Viscosity: N.D. N.D. Partition Coefficient, n-octanol/ Solubility in Water: Slight N.D. water: Decompostion Temp., °C: N.D. Boiling Range, °C: Explosive Limits, vol%: 0.9 - 13.0-24 - 204 Flash Point, °C: Flammability: Supports Combustion -96 **Evaporation Rate:** Auto-ignition Temp., °C: Faster than Ether N.D. Vapor Density: Heavier than Air Vapor Pressure: N.D.

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid contact with strong acid and strong bases. Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalies.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: Substance may cause slight skin irritation. May cause skin irritation. Allergic reactions are possible. Prolonged or repeated contact may cause skin irritation.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed. Aspiration hazard if swallowed; can enter lungs and cause damage.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. Contains carbon black. Chronic inflammation, lung fibrosis, and lung tumors have been observed in some rats experimentally exposed for long periods of time to excessive concentrations of carbon black and several insoluble fine dust particles. Tumors have not been observed in other animal species (i.e., mouse and hamster) under similar circumstances and study conditions. Epidemiological studies of North American workers show no evidence of clinically significant adverse health effects due to occupational exposure to carbon black.

Carbon black is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC and is proposed to be listed as A4- "not classified as a human carcinogen" by the American Conference of Governmental Industrial Hygienists. Significant exposure is not anticipated during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of carbon black in the formula. IARC lists Ethylbenzene as a possible human carcinogen (group 2B).

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

CAS-No.	Chemical Name	Oral LD50	Dermal LD50	Vapor LC50
67-64-1	Acetone	5800 mg/kg Rat	N.I.	50.1 mg/L Rat
74-98-6	Propane	N.I.	N.I.	658 mg/L Rat
106-97-8	n-Butane	N.I.	N.I.	658 mg/L Rat
14807-96-6	Hydrous Magnesium Silicate	6000	N.I.	30
1330-20-7	Xylene (mixed isomers)	3500 mg/kg Rat	>4350 mg/kg Rabbit	29.08 mg/L Rat

Date Printed: 11/4/2015 Page 5 / 6

64742-47-8	Hydrotreated Light Distillate	>5000 mg/kg Rat	>2000 mg/kg Rabbit	>5000 mg/L Rat
64742-49-0	Naphtha, Petroleum, Hydrotreated Light	>5000 mg/kg Rat	>3160 mg/kg Rabbit	>4951 mg/L Rat
100-41-4	Ethylbenzene	3500 mg/kg Rat	15400 mg/kg Rabbit	17.2 mg/L Rat
64742-89-8	Aliphatic Hydrocarbon	N.I.	3000 mg/kg Rabbit	N.I.
1333-86-4	Carbon Black	>15400 mg/kg Rat	N.I.	N.I.
64742-95-6	Solvent Naphtha, Light Aromatic	8400 mg/kg Rat	>2000 mg/kg Rabbit	N.I.
111-76-2	Ethylene Glycol Monobutyl Ether	470 mg/kg Rat	99 mg/kg Rabbit	N.I.

N.I. - No Information

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components. Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Dispose of material in accordance to local, state, and federal regulations and ordinances. Do not allow to enter waterways, wastewater, soil, storm drains or sewer systems.

14. Transport Information

	Domestic (USDOT)	International (IMDG)	Air (IATA)	TDG (Canada)
UN Number:	N.A.	1950	1950	N.A.
Proper Shipping Name:	Paint Products in Limited Quantities	Aerosols	Aerosols	Paint Products in Limited Quantities
Hazard Class:	N.A.	2.1	2.1	N.A.
Packing Group:	N.A.	N.A.	N.A.	N.A.
Limited Quantity:	Yes	Yes	Yes	Yes

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Fire Hazard, Pressure Hazard, Acute Health Hazard, Chronic Health Hazard

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

Chemical NameCAS-No.Xylene (mixed isomers)1330-20-7Ethylbenzene100-41-4Ethylene Glycol Monobutyl Ether111-76-2

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

No TSCA 12(b) components exist in this product.

Date Printed: 11/4/2015 Page 6 / 6

16. Other Information

HMIS RATINGS

Health: 2* Flammability: 4 Physical Hazard: 0 Personal Protection: X

NFPA RATINGS

Health: 2 Flammability: 4 Instability 0

VOLATILE ORGANIC COMPOUNDS, g/L: 540

SDS REVISION DATE: 11/4/2015

REASON FOR REVISION: Product Composition Changed

Substance and/or Product Properties Changed in Section(s):

02 - Hazard Identification Statement(s) Changed

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.

Date Printed: 12/14/2016 Page 1 / 6

Safety Data Sheet



Trusted Quality Since 1921 www.rustoleum.com

1. Identification

Product Name: PTOUCH 2X +SSPR 6PK GLOSS WHITE Revision Date: 12/14/2016

Product Identifier: 249090 Supercedes Date: 12/7/2016

Product Use/Class: Topcoat/Aerosols

Supplier: Rust-Oleum Corporation Manufacturer: Rust-Oleum Corporation 11 Hawthorn Parkway 11 Hawthorn Parkway

11 Hawthorn Parkway

Vernon Hills, IL 60061

11 Hawthorn Parkway

Vernon Hills, IL 60061

USA

USA

Preparer: Regulatory Department

Emergency Telephone: 24 Hour Hotline: 847-367-7700

2. Hazard Identification

Classification

Symbol(s) of Product



Signal Word

Danger

Possible Hazards

27% of the mixture consists of ingredient(s) of unknown acute toxicity.

GHS HAZARD STATEMENTS

Carcinogenicity, category 1B H350 May cause cancer.

Compressed Gas H280 Contains gas under pressure; may explode if heated.

Eye Irritation, category 2 H319 Causes serious eye irritation.

Flammable Aerosol, category 1 H222 Extremely flammable aerosol.

Germ Cell Mutagenicity, category 1B H340 May cause genetic defects.

GHS LABEL PRECAUTIONARY STATEMENTS

STOT, single exposure, category 3, NE

P201 Obtain special instructions before use.

P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No

May cause drowsiness or dizziness.

smoking.

H336

P211 Do not spray on an open flame or other ignition source.

P251 Do not pierce or burn, even after use.

P261 Avoid breathing dust/fume/gas/mist/vapours/spray.

P264 Wash hands thoroughly after handling.
P271 Use only outdoors or in a well-ventilated area.

P280 Wear protective gloves/protective clothing/eye protection/face protection.
P304+P340 IF INHALED: Remove person to fresh air and keep comfortable for breathing.

Date Printed: 12/14/2016 Page 2 / 6

P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if

present and easy to do. Continue rinsing.

P308+P313 IF exposed or concerned: Get medical advice/attention.
P312 Call a POISON CENTER or doctor/physician if you feel unwell.

P337+P313 If eye irritation persists: Get medical advice/attention.

P403+P233 Store in a well-ventilated place. Keep container tightly closed.

P405 Store locked up.

P410+P403 Protect from sunlight. Store in a well-ventilated place.

P410+P412 Protect from sunlight. Do no expose to temperatures exceeding 50°C/ 122°F.

P501 Dispose of contents/container in accordance with local, regional and national regulations.

3. Composition/Information On Ingredients

HAZARDOUS SUBSTANCES

Chemical Name	CAS-No.	Wt.% Range	GHS Symbols	GHS Statements
Propane	74-98-6	10-25	GHS04	H280
Acetone	67-64-1	10-25	GHS02-GHS07	H225-319-332-336
Titanium Dioxide	13463-67-7	10-25	Not Available	Not Available
n-Butane	106-97-8	2.5-10	GHS04	H280
n-Butyl Acetate	123-86-4	2.5-10	GHS02-GHS07	H226-336
Naphtha, Petroleum, Hydrotreated Light	64742-49-0	2.5-10	GHS08	H304
Dimethyl Carbonate	616-38-6	2.5-10	GHS02	H225
1-Methoxy-2-Propyl Acetate	108-65-6	2.5-10	GHS02	H226
Xylenes (o-, m-, p- isomers)	1330-20-7	1.0-2.5	GHS02-GHS07	H226-315-319-332
Solvent Naphtha, Light Aromatic	64742-95-6	1.0-2.5	GHS07-GHS08	H304-332-340-350
1,2,4-Trimethylbenzene	95-63-6	1.0-2.5	GHS02-GHS07- GHS08	H226-304-315-319-332-335
Propylene Glycol Monobutyl Ether	5131-66-8	1.0-2.5	GHS07	H302-315-319
Ethylbenzene	100-41-4	0.1-1.0	GHS02-GHS07- GHS08	H225-304-332-351-373
Ethylene Glycol Monobutyl Ether	111-76-2	0.1-1.0	GHS07	H302-312-315-319-332

4. First-aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation. If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

Date Printed: 12/14/2016 Page 3 / 6

5. Fire-fighting Measures

EXTINGUISHING MEDIA: Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Dry Sand, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20°F. EXTREMELY FLAMMABLE LIQUID AND VAPOR!Water spray may be ineffective. Closed containers may explode when exposed to extreme heat due to buildup of steam. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Full protective equipment including self-contained breathing apparatus should be used. Evacuate area and fight fire from a safe distance. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

6. Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Remove contaminated clothing and launder before reuse. Use only in a well-ventilated area. Use only with adequate ventilation. Follow all MSDS/label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Avoid contact with eyes, skin and clothing. STORAGE: Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of NFPA Class I flammable liquids. Keep away from heat, sparks, flame and sources of ignition. Contents under pressure. Do not expose to heat or store above 120 ° F. Avoid excess heat. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials.

8. Exposure Controls/Personal Protection

Chemical Name	CAS-No.	Weight % Less Than	ACGIH TLV- TWA	ACGIH TLV- STEL	OSHA PEL- TWA	OSHA PEL- CEILING
Propane	74-98-6	20.0	N.E.	N.E.	1000 ppm	N.E.
Acetone	67-64-1	20.0	250 ppm	500 ppm	1000 ppm	N.E.
Titanium Dioxide	13463-67-7	15.0	10 mg/m3	N.E.	15 mg/m3	N.E.
n-Butane	106-97-8	10.0	N.E.	1000 ppm	N.E.	N.E.
n-Butyl Acetate	123-86-4	10.0	50 ppm	150 ppm	150 ppm	N.E.
Naphtha, Petroleum, Hydrotreated Light	64742-49-0	10.0	N.E.	N.E.	N.E.	N.E.
Dimethyl Carbonate	616-38-6	10.0	N.E.	N.E.	N.E.	N.E.
1-Methoxy-2-Propyl Acetate	108-65-6	5.0	N.E.	N.E.	N.E.	N.E.
Xylenes (o-, m-, p- isomers)	1330-20-7	5.0	100 ppm	150 ppm	100 ppm	N.E.
Solvent Naphtha, Light Aromatic	64742-95-6	5.0	N.E.	N.E.	N.E.	N.E.
1,2,4-Trimethylbenzene	95-63-6	5.0	N.E.	N.E.	N.E.	N.E.
Propylene Glycol Monobutyl Ether	5131-66-8	5.0	N.E.	N.E.	N.E.	N.E.
Ethylbenzene	100-41-4	1.0	20 ppm	N.E.	100 ppm	N.E.
Ethylene Glycol Monobutyl Ether	111-76-2	1.0	20 ppm	N.E.	50 ppm	N.E.

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation.

Date Printed: 12/14/2016 Page 4 / 6

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use gloves to prevent prolonged skin contact. Use impervious gloves to prevent skin contact and absorption of this material through the skin. Nitrile or Neoprene gloves may afford adequate skin protection.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications. Refer to safety supervisor or industrial hygienist for further information regarding personal protective equipment and its application.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

9. Physical and Chemical Properties

Physical State: Appearance: Aerosolized Mist Liquid **Odor Threshold:** Odor: Solvent Like N.E. Relative Density: 0.830 pH: N.E. Freeze Point, °C: Viscosity: N.D. N.D. Solubility in Water: Partition Coefficient, n-Sliaht N.D. octanol/water: Decompostion Temp., °C: N.D. Boiling Range, °C: -37 - 175 **Explosive Limits, vol%:** 0.9 - 13.0Flammability: Flash Point, °C: Supports Combustion -96 Evaporation Rate: Auto-ignition Temp., °C: Faster than Ether N.D. Vapor Density: Vapor Pressure: Heavier than Air N.D.

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120°F (49°C). Avoid contact with strong acid and strong bases. Avoid all possible sources of ignition.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalies.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: Substance may cause slight skin irritation. May cause skin irritation. Allergic reactions are possible. Prolonged or repeated contact may cause skin irritation.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs. Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Harmful if swallowed. Aspiration hazard if swallowed; can enter lungs and cause damage.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93,

Date Printed: 12/14/2016 Page 5 / 6

2010)

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

CAS-No.	Chemical Name	Oral LD50	Dermal LD50	Vapor LC50
74-98-6	Propane	N.I.	N.I.	658 mg/L Rat
67-64-1	Acetone	5800 mg/kg Rat	>15700 mg/kg Rabbit	50.1 mg/L Rat
13463-67-7	Titanium Dioxide	>10000 mg/kg Rat	2500 mg/kg	N.I.
106-97-8	n-Butane	N.I.	N.I.	658 mg/L Rat
123-86-4	n-Butyl Acetate	10768 mg/kg Rat	>17600 mg/kg Rabbit	> 21 mg/L Rat
64742-49-0	Naphtha, Petroleum, Hydrotreated Light	>5000 mg/kg Rat	>3160 mg/kg Rabbit	>4951 mg/L Rat
616-38-6	Dimethyl Carbonate	13000 mg/kg Rat	>5000 mg/kg Rabbit	140 mg/L Rat
108-65-6	1-Methoxy-2-Propyl Acetate	8532 mg/kg Rat	>5000 mg/kg Rabbit	N.I.
1330-20-7	Xylenes (o-, m-, p- isomers)	3500 mg/kg Rat	>4350 mg/kg Rabbit	29.08 mg/L Rat
64742-95-6	Solvent Naphtha, Light Aromatic	8400 mg/kg Rat	>2000 mg/kg Rabbit	N.I.
95-63-6	1,2,4-Trimethylbenzene	3280 mg/kg Rat	>3160 mg/kg Rabbit	18 mg/L Rat
5131-66-8	Propylene Glycol Monobutyl Ether	1900 mg/kg Rat	N.I.	N.I.
100-41-4	Ethylbenzene	3500 mg/kg Rat	15400 mg/kg Rabbit	17.4 mg/L Rat
111-76-2	Ethylene Glycol Monobutyl Ether	470 mg/kg Rat	1,060 mg/kg Rabbit	11 mg/L

N.I. - No Information

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components. Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Dispose of material in accordance to local, state, and federal regulations and ordinances. Do not allow to enter waterways, wastewater, soil, storm drains or sewer systems.

14. Transport Information

•				
UN Number:	Domestic (USDOT) N.A.	International (IMDG) 1950	<u>Air (IATA)</u> 1950	TDG (Canada) N.A.
ON Number.	N.A.	1950	1930	N.A.
Proper Shipping Name:	Paint Products in Limited Quantities	Aerosols	Aerosols	Paint Products in Limited Quantities
Hazard Class:	N.A.	2.1	2.1	N.A.
Packing Group:	N.A.	N.A.	N.A.	N.A.
Limited Quantity:	Yes	Yes	Yes	Yes

15. Regulatory Information

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Fire Hazard, Pressure Hazard, Acute Health Hazard, Chronic Health Hazard

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

Date Printed: 12/14/2016 Page 6 / 6

 Chemical Name
 CAS-No.

 Dimethyl Carbonate
 616-38-6

 Xylenes (o-, m-, p- isomers)
 1330-20-7

 1,2,4-Trimethylbenzene
 95-63-6

 Ethylbenzene
 100-41-4

 Ethylene Glycol Monobutyl Ether
 111-76-2

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

Chemical Name
n-Nonane

CAS-No.
111-84-2

16. Other Information

HMIS RATINGS

Health: 2* Flammability: 4 Physical Hazard: 0 Personal Protection: X

NFPA RATINGS

Health: 2 Flammability: 4 Instability 0

VOLATILE ORGANIC COMPOUNDS, g/L: 568

SDS REVISION DATE: 12/14/2016

REASON FOR REVISION: Regulatory Formula Source Changed

Product Composition Changed

Substance and/or Product Properties Changed in Section(s):

02 - Hazard Identification 16 - Other Information Statement(s) Changed

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.



1. Company and Product Identification

1.1	Identification – Product Name:	Super Special Blade Clean 3G
1.2	Other means of identification	NA
1.2	Synonym:	NA
1.3	Recommended Use Of The Chemical	Cleaning agent
1.3	and Restrictions On Use:	
	Name, Address, And Telephone Number Of	Clean Print Chemicals
	The Manufacturer, Or Other Responsible Party:	C.A.T 2/530 Boundary Rd, Derrimut Vic Australia
1.4		3030 Ph: +61 383532328
	Competent Person email address	NA
1.5	24 Hour Emergency No.:	770-425-3353
1.3		800-222-1222 (24-Hr, CHEMTREC)

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW: This product is a clear, pink liquid with pine odor. Repeated exposure may cause skin dryness or cracking or minor irritation. The product is not flammable. Depending on the duration of over-exposure, breathing vapors may headache or dizziness, respiratory tract irritation. Thermal decomposition of this product may produce irritating vapors and toxic gases (e.g. carbon monoxide and carbon dioxide). Emergency responders must wear personal protective equipment (and have appropriate fire-extinguishing protection) suitable for the situation to which they are responding.

	Physical Hazards Summary			
I		Skin irritation, Category 2 Eye Irritation, Category 2A		
Pot	rential Ecological Effects Summary	Not classifiable		
2.1	2.1 Classification Of Product			
	U.S. OSHA classification	Skin irritation, Category 2 Eye irritation, Category 2A		
	Classification as per EC 1272/2008 (CLP/GHS)	Skin irritation, Category 2 Eye irritation, Category 2		
	Hazardous Materials Information System (HMIS) Rating	Health Flammability Physical Hazard	0 0	

			e Equipment	C	
		Chronic I Hazard	Healtn		
2.2	Label Elements OSHA/GHS				
	Signal Word	WARNING			
	Hazard Statements	H315 H319	Causes skin irritat Causes serious ey		
	Precautionary Statements: Prevention	P264 P280	protection	gloves/prote	ctive clothing/eye protection/face
	Precautionary Statements: Response	P305+P351+P338 P337+P313 P302+P352 P321 P363	Remove contact le If eye irritation pe IF ON SKIN wash	enses if presents rsists, get med an with soap and the See first aid	section on this SDS
	Precautionary statements: Storage				
	Precautionary Statements: Disposal	P501	Dispose of conten and local regulation		accordance with all federal, state
	Hazard pictograms	!			
2.3	Unclassified Hazards	None			
2.4	Ingredients with unknown acute toxicity	None			

3. COMPOSITION and INFORMATION ON INGREDIENTS

h			
Chemical name	% w/w	US OSHA	GHS/EU CLP

CAS#			
EINECS#			
Proprietary blend of surfactants, fragrances and enzymes	<10%	Flammable liquid, Category 3 Acute toxicity, Oral, Category 4 Acute toxicity, Inhal, Category 4 Acute toxicity, Dermal, Category 4 Skin irritation, Category 2 Eye irritation, Category 2A Aspiration toxicity, Category 1 Acute aquatic toxicity, Category 2 Chronic aquatic toxicity, Category 2	Flammable liquid, Category 3 (H226) Acute toxicity, Oral, Category 4 (H302) Acute toxicity, Inhal, Category 4 (H332) Acute toxicity, Dermal, Category 4 (H312) Skin irritation, Category 2 (H315) Eye irritation, Category 2 (H319) Aspiration toxicity, Category 1 (H304) Acute aquatic toxicity, Category 2 (H401) Chronic aquatic toxicity, Category 2 (H411)
Proprietary blend of solvents	<20%	Flammable liquid, Category 4 Acute toxicity, Oral, Category 4 Acute toxicity, Inhal, Category 4 Acute toxicity, Dermal, Category 4 Skin irritation, Category 2 Eye irritation, Category 2A	Acute toxicity, Oral, Category 4 (H302) Acute toxicity, Inhal, Category 4 (H332) Acute toxicity, Dermal, Category 4 (H312) Skin irritation, Category 2 (H315) Eye irritation, Category 2 (H319)
Ethanolamine (CAS 9007-33-4)	<5%	Flammable liquid, Category 4 Acute toxicity, Oral, Category 4 Acute toxicity, Inhal, Category 4 Acute toxicity, Dermal, Category 4 Skin corrosion, Category 1 Serious eye damage, Category 1 Specific target organ toxicity, Single exposure (Resp), Category 3 Acute aquatic toxicity, Category 2 Chronic aquatic toxicity, Category 3	Acute toxicity, Oral, Category 4 (H302) Acute toxicity, Inhal, Category 4 (H332) Acute toxicity, Dermal, Category 4 (H312) Skin corrosion, Category 1 (H314) Serious eye damage, Category 1 (H318) Specific target organ toxicity, Single exposure (Resp), Category 3 (H335) Acute aquatic toxicity, Category 2 (H401) Chronic aquatic toxicity, Category 3 (H412)
Water	Bulk	Not classifiable	Not classifiable

See Section 16 for Definitions of Terms Used.

The manufacturer claims Trade Secret Information as defined in 29CFR1910.1200 Appendix E and 29CFR1910.1200(i). All hazards have been accounted for in this product's hazard classification.

4. FIRST-AID MEASURES

4.1	Description of Necessary Measures	
	Skin exposure:	If this product contaminates the skin, immediately begin decontamination with running water. Remove exposed or contaminated clothing, taking care not to contaminate eyes. Victim should seek immediate medical attention if any adverse exposure symptoms develop or irritation persists.
	Eye exposure:	If this product enters the eyes, open victim's eyes while under gently running water. Use sufficient force to open eyelids. Have victim "roll" eyes. Minimum flushing is for 15 minutes. Seek medical attention immediately.
	Inhalation:	If this product is inhaled, remove victim to fresh air and place in a position comfortable for breathing. If necessary, use artificial respiration to support vital functions. Remove or cover gross contamination to avoid exposure to rescuers.
	Ingestion:	If this product is swallowed, CALL POISION CENTER or PHYSICIAN FOR MOST CURRENT INFORMATION. DO NOT INDUCE VOMITING. Have victim rinse mouth with water, if conscious. Never induce vomiting or give a diluent (e.g., water) to someone who is unconscious, having convulsions, or unable to swallow. If contaminated individual is convulsing, maintain an open airway and obtain immediate medical attention.
4.2	Most Important Symptoms/Effects:	Symptoms of skin and eye contact may include redness and irritation. Ingestion may cause stomach pains, cramps, and gastritis.
		Delayed: Prolonged or repeated skin overexposure to this product may cause dermatitis (dry, red skin).
4.3	Indication Of Immediate Medical Attention And Special Treatment Needed, If Necessary:	None known. TARGET ORGANS: Acute: Eyes and Skin
Victim	as of chemical exposure must be taken for medic	al attention if any adverse effects occur. Rescuers should be taken for medical
	O	

5. FIRE-FIGHTING MEASURES

	Flammable properties	Not classifiable as flammable NFPA RATING FLAMMABILITY OTHER See Section 16 for definitions of ratings				
		Flash Point °C (°F): > 200 °F (> 93.3 °C) Autoignition Temperature °C (°F): Not evaluated				
		Flammable Limits (in air by volume,	%): Not evaluated			
5.1	Suitable And Unsuitable Extinguishing Media:	This material should not contribute material suitable for ordinary combus	to the intensity of a fire. Use extinguishing stibles.			
		Water spray YES Foam YES Halon YES	Carbon dioxide YES Dry chemical YES Other			
5.2	Specific Hazards Arising From Chemical:	When involved in a fire, this material may decompose and produce irritating fumes and toxic gases (e.g., carbon monoxide, carbon dioxide) Explosion Sensitivity to Mechanical Impact: None. Explosion Sensitivity to Static Discharge: Vapors are not expected to ignite				
5.3	Special Protective Equipment And Precautions For Fire-Fighters:	Incipient fire responders should wear eye protection. Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment. Move containers from fire area if it can be done without risk to personnel. If possible, prevent runoff water from entering storm drains, bodies of water, or other environmentally sensitive areas.				

6. ACCIDENTAL RELEASE MEASURES

6.1	Personal Precautions		Uncontrolled releases should be responded to only by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a spill, clear the affected area and protect people.
	Protecti	ive equipment	For small releases (< 20 liters, 5 gallons), clean up spilled liquid wearing gloves, goggles and suitable body protection. Absorb with earth, sand or other non-combustible material and transfer to containers for proper disposal. The minimum Personal Protective Equipment recommended for response to non-incidental releases (more than 20 liters or 5 gallons) should be: triple-gloves (neoprene gloves over nitrile gloves), chemical resistant suit and boots. Prevent further leak/release if it is safe to do so. Do not let the product enter drains.
	Emergen	cy procedures	Eliminate all ignition sources. Stop leak if you can do so without risk.

6.2	Methods and Materials for Containment and	Use absorbent material for cleaning up spills. Collect spilled material for proper
	Cleaning Up	disposal. Decontaminate the area thoroughly. Place all spill residues in a
		suitable container. Dispose of in accordance with applicable U.S. Federal,
		State, or local procedures, or appropriate local standards (see Section 13,
		Disposal Considerations).
		,

7. HANDLING and STORAGE

carefully on a stable surface. Ensure all connections are tight before transfer. Empty containers may contain residual liquid; therefore, empty containers should be handled with care. Keep away from ignition sources; no smoking. As with all chemicals, avoid getting this product ON YOU or IN YOU. Wash thoroughly after handling this product. Do not eat or drink while handling this material. Remove contaminated clothing promptly. During equipment maintenance follow practices indicated in Section 6 (Accidental Release Measures) to decontaminate equipment or clean-up small spills. Make certain that application equipment is locked and tagged-out safely if necessary. Collect all rinsates and residual material and dispose of according to applicable U.S. Federal, State, or local procedures or appropriate local standards. 7.2 Conditions For Safe Storage Keep containers tightly closed. Store individual containers out of direct sunlight. Tanks should be stored away from intense heat or direct sunlight. Avoid freezing. Store away from incompatible materials. Storage and use areas should be covered with impervious materials. Keep container tightly closed when not in use. If appropriate, post warning signs in storage			7. HANDLING and STORAGE
contaminated clothing promptly. During equipment maintenance follow practices indicated in Section 6 (Accidental Release Measures) to decontaminate equipment or clean-up small spills. Make certain that application equipment is locked and tagged-out safely if necessary. Collect all rinsates and residual material and dispose of according to applicable U.S. Federal, State, or local procedures or appropriate local standards. 7.2 Conditions For Safe Storage Keep containers tightly closed. Store individual containers out of direct sunlight. Tanks should be stored away from intense heat or direct sunlight. Avoid freezing. Store away from incompatible materials. Storage and use areas should be covered with impervious materials. Keep container tightly closed when not in use. If appropriate, post warning signs in storage and use areas. Inspect all incoming containers before storage, to ensure containers are properly labeled and not damaged.	7.1	Precautions for Safe Handling	All employees who handle this material should be trained to handle it safely. Open containers carefully on a stable surface. Ensure all connections are tight before transfer. Empty containers may contain residual liquid; therefore, empty containers should be handled with care. Keep away from ignition sources; no smoking. As with all chemicals, avoid getting this product ON YOU or IN YOU. Wash thoroughly
Measures) to decontaminate equipment or clean-up small spills. Make certain that application equipment is locked and tagged-out safely if necessary. Collect all rinsates and residual material and dispose of according to applicable U.S. Federal, State, or local procedures or appropriate local standards. 7.2 Conditions For Safe Storage Keep containers tightly closed. Store individual containers out of direct sunlight. Tanks should be stored away from intense heat or direct sunlight. Avoid freezing. Store away from incompatible materials. Storage and use areas should be covered with impervious materials. Keep container tightly closed when not in use. If appropriate, post warning signs in storage and use areas. Inspect all incoming containers before storage, to ensure containers are properly labeled and not damaged.			after handling this product. Do not eat or drink while handling this material. Remove contaminated clothing promptly.
should be stored away from intense heat or direct sunlight. Avoid freezing. Store away from incompatible materials. Storage and use areas should be covered with impervious materials. Keep container tightly closed when not in use. If appropriate, post warning signs in storage and use areas. Inspect all incoming containers before storage, to ensure containers are properly labeled and not damaged.			During equipment maintenance follow practices indicated in Section 6 (Accidental Release Measures) to decontaminate equipment or clean-up small spills. Make certain that application equipment is locked and tagged-out safely if necessary. Collect all rinsates and residual material and dispose of according to applicable U.S. Federal, State, or local procedures or appropriate local standards.
Incompatibilities Oxidizers, strong oxidizing acids.	7.2	Conditions For Safe Storage	Keep containers tightly closed. Store individual containers out of direct sunlight. Tanks should be stored away from intense heat or direct sunlight. Avoid freezing. Store away from incompatible materials. Storage and use areas should be covered with impervious materials. Keep container tightly closed when not in use. If appropriate, post warning signs in storage and use areas. Inspect all incoming containers before storage, to ensure containers are properly labeled and not damaged.
		Incompatibilities	Oxidizers, strong oxidizing acids.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

8.1	Control Parameters
-----	--------------------

	CHEMICAL NAME	CAS#	% w/w		EXPOSURE LIMITS IN AIR				
				ACGI	H-TLV	OS	SHA-PEL (NIO	SH)	OTHER
				TWA	STEL	TWA	STEL	IDLH	
				ppm	ppm	ppm	ppm	ppm	ppm
	Proprietary blend of surfactants, fragrances and enzymes	NA	<10%	NA	NA	NA9NA)	NA(NA)	NA	
	Proprietary blend of solvents	NA	<20%	NA	NA	NA(NA)	NA(NA)	NA	
	Ethanolamine	9007-33-4	<5%	3	6	3(3)	NA(6)	NA	
	No occupational exposure li established for this product. I made to limit exposure to preven	Efforts should be		this product. requirements 1910.1200),	All pertinent of the Federal	hazard inform Occupational auvalent Standa	nation has been Safety and Hea	n provided in tl alth Administrati	concentration present in his document, per the on Standard (29 CFR Hazardous Materials
8.2	2 Appropriate Engineering Controls.			Use with adequate ventilation to ensure exposure levels are maintained below the limits provided in this Section or as low as reasonably achievable. Ensure eyewash/safety shower stations are available near areas where this product is used.					
8.3	Personal Protective Equipment Respiratory protection:			None needed under normal conditions of use. Use NIOSH approved respirators if ventilation is inadequate to control mists or vapor. If respiratory protection is needed, use only protection authorized in the U.S. Federal OSHA Standard (29 CFR 1910.134), applicable U.S. State regulations, or the applicable local standards. Oxygen levels below 19.5% are considered IDLH by OSHA. In such atmospheres, use of a full-face piece pressure/demand SCBA or a full-face piece, supplied air respirator with auxiliary self-contained air supply is required under OSHA's Respiratory Protection Standard (29 CFR 1910.134-1998).				atory protection is SHA Standard (29 ble local standards. such atmospheres, piece, supplied air	
	Eye protection:								in OSHA 29 CFR blash hazards exist.
		Hand pr	otection:	Wear chemical impervious gloves (e.g., Solvex TM , Neoprene, Nitrile).				trile).	
	Body protection:				ibber apron)	to protect fro	om splashes a		oriate for task (e.g., Iomex coveralls are

9. PHYSICAL and CHEMICAL PROPERTIES

Appearance	This product is a clear, j	This product is a clear, pink liquid.				
Odor	Pine-like	Odor Threshold	NE			
Melting Point °C (°F)	Not evaluated	pН	11			
Initial Boiling Point °C (°F)	179 °C (354 °F)	Boiling Point Range °C (°F)	Not evaluated			
Flammability	Not flammable	Evaporation Rate (n-butyl acetate = 1)	Not evaluated			
Vapor Density (air = 1)	Not evaluated	Vapor Pressure mm Hg @ 20°C:	Not evaluated			
Solubility (in water)	Soluble	Relative density (water = 1)	1.0			
Viscosity	Not evaluated	Oil-Water Partition Coefficient	NE			
VOC	6.2g/L (0.052lb/gal)	HAP	5.1g/L (0.042lb/gal)			
How To Detect This Substance (Warning Properties):	Pine like odor.					

10. STABILITY and REACTIVITY

10.1	Reactivity	Not considered reactive.
------	------------	--------------------------

10.2	Chemical Stability	Stable under normal use and storage.
10.3	Possibility of hazardous reactions	Hazardous polymerization will not occur.
10.4	Conditions to avoid	Avoid mixing with incompatible materials.
10.5	Incompatible Materials	Strong oxidizers, Strong acids.
10.6	Hazardous Decomposition Products	Thermal decomposition of this product may generate carbon monoxide and carbon dioxide.

11. TOXICOLOGICAL INFORMATION

11.1 Toxicology Information

Note: This product has not been evaluated for its toxicity as a whole.

Component	Oral LD ₅₀ (mg/kg)	Dermal LD ₅₀ (mg/kg)	Inhalation LC ₅₀ (mg/m ³)	Skin Irritation	Serious eye damage
Proprietary blend of surfactants, fragrances and enzymes	No data available	No data available	No data available	YES	Irritation
Proprietary blend of solvents	No data available	No data available	No data available	YES	Irritation
Ethanolamine	1089 mg/kg (Rat)	1015 mg/kg (Rabbit)	No data available	YES	YES

11.2: Carcinogenicity (IARC, ACGIH, NTP, OSHA)

None of the components are listed as carcinogenic by IARC, ACGIH, NTP or OSHA

11.3: Reproductive toxicity:

None of the components of this product are listed as reproductive toxins on the California Proposition 65 List.

12.1 Ecological Information

Note: This product has not been evaluated for its ecologic impact as a whole.

Component	Toxicity to fish	Toxicity to daphnia	Bioaccumulation	Solubility	Biodegradability
Proprietary blend of surfactants, fragrances and enzymes	No data available	No data available	No data available	No data available	Readily biodegradable
Proprietary blend of solvents	No data available	No data available	Not expected	Soluble	Readily biodegradable
Ethanolamine	150 mg/L (LC50, 96 hr, carp)	65 mg/L (EC 50, 48 hr)	No data available	Soluble	Readily biodegradable

12.2	Persistence and Degradability	This product is expected to be readily biodegradable
12.3	Bioaccumulative Potential	This product is not expected to bioaccumulate
12.4	Mobility in Soil	When spilled onto soil, this product is expected to evaporate slowly.
12.5	Other Adverse Ecological Effects	This product may be harmful to aquatic life if large volumes of it are released into an aquatic environment.

13. DISPOSAL CONSIDERATIONS

Preparing Wastes of this Product for Disposal	Waste disposal must be in accordance with appropriate U.S. Federal, State, and local regulations or with local regulations.
Disposal of Contaminated Packaging	Cleaned containers can be recycled or disposed of as non-contaminated waste, if authorized by your local authorities. Dispose of containers as required by local regulations.
U.S. EPA Waste Number	

14. TRANSPORT INFORMATION

THIS MATERIAL IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION. ALWAYS CONSULT LATEST REGULATIONS PRIOR TO SHIPPING FOR CHANGES!

US Domestic

14.1	UN Number	Not dangerous goods
14.2	UN Proper Shipping Name	
14.3	Transport Hazard Class(es)	
	Transport label(s) required	
14.4	Packing Group	
14.5	Marine Pollutant	
	NA Emergency Response Guide	
	Number (2012)	
	Reportable Quantity (RQ)	

International Air Transport Association

14.6	UN Number	Not dangerous goods
	UN Proper Shipping Name	
	Transport Hazard Class(es)	
	Transport label(s) required	
	Packing Group	
	Marine Pollutant	
	Packaging Instructions	

International Maritime Organization

14.7	UN Number	Not dangerous goods
	UN Proper Shipping Name	
	Transport Hazard Class(es)	
	Transport label(s) required	
	Packing Group	
	Marine Pollutant	
	NA Emergency Response Guide	
	Number (2012)	

15. SAFETY, HEALTH and ENVIRONMENTAL REGULATIONS SPECIFIC FOR THE PRODUCT

PROGRAM	Super Special Blade Clean 3G
Clean Air Act Hazardous Air Pollutants	NO
Safe Drinking Water Act	NO
RCRA F, K, P, U or D-lists	NO
SARA 302 EHS RQ	NO
SARA 302 EHS TPQ	NO
CERCLA RQ (lbs)	NO
SARA 313 LISTED	NO
SARA 311/312 ACUTE	YES
SARA 311/312 CHRONIC	NO
SARA 311/312 FIRE	NO
SARA 311/312 PRESSURE	NO
SARA 311/312	NO

REACTIVITY	
EPA EXTREMELY	
HAZARDOUS	NO
SUBSTANCE	
PEL	NO
PSM	NO
DHS CFATS STQ	NO
(Flammable Release)	NO
DEA Controlled	NO
Substances	NO
DSL	NOTE 1
NDSL	NOTE 1
REACH Pre-registered	NOTE 1
List	NOTET
TSCA (Public)	NOTE 1
European Inventory of	
Existing Commercial	NO
Chemical Substances	NO
(EINECS)	
EU No-Longer Polymers	NO
List (NLP)	NO
EEC Classification	
Packaging, and Labeling	YES
of Dangerous	1123
Substances(Annex 1)	
Philippines	NE
Japan	NE
Australia	NOTE 2
Korea	NE
China	NE
New Zealand Inventory of	NE
Chemicals	INE

NOTE 1: Some components of this product are listed in the Canadian DSL/NDSL, REACH and US TSCA publicly available list. NOTE 2: Not hazardous under NOHSC:1008(2004), 3rd Edition.

16. OTHER INFORMATION

16.1	Original Preparation	14 November 2016
16.2	Revision History	1.1: 11 February2017
16.3	Prepared by	C.I. Bright
	1 2	2/530 Boundary Rd
		Derrimut 3030
16.4	Date of Printing	February 21, 2017

DEFINITIONS OF TERMS

16.5	A large number of abb	reviations and acronyms appear on a MSDS. Some of these which are commonly used include the following:		
	Section 2 GHS: Global Harmonization System OSHA: U.S. Occupational Safety and Health Administration. CLP: Classification and Packaging WHMIS: Workplace Hazardous Materials Information System STOT: Specific Toront Organ Toricity.			
	Section 2			
	Section 3	EINECS #: European Chemical Substances Information System index number		
	Section 5	Health Hazard: 0 (material that on exposure under fire conditions would offer no hazard beyond that of ordinary combustible materials); 1 (materials that on exposure under fire conditions could cause irritation or minor residual injury); 2 (materials that on intense or continued exposure under fire conditions could cause temporary incapacitation or possible residual injury); (materials that can on short exposure could cause serious temporary or residual injury); 4 (materials that under very short exposure could cause death or major residual injury). Flammability Hazard Reactivity Hazard: Refer to definitions for "Hazardous Materials Identification System". Flash Point: Minimum temperature at which a liquid gives off sufficient vapors to form an ignitable mixture with ai Autoignition Temperature: The minimum temperature required to initiate combustion in air with no other source of ignition. LEL: The lowest percent of vapor in air, by volume, that will explode or ignite in the presence of an ignition source. UEL: The		
	Section 8	STOT: Specific Target Organ Toxicity CAS #: European Chemical Substances Information System index number ENECS #: European Chemical Substances Information System index number NPPa: Nation Fire Protection Association Health Hazard: 0 (materials that on exposure under fire conditions would offer no hazard beyond that of ordinary combustible materials); I (materials that on exposure under fire conditions could cause irritation or minor residual injury); 2 (materials that on intense or continued exposure under fire conditions could cause temporary incapacitation or possible residual injury); 3 (materials that can on short exposure could cause serious temporary or residual injury); 4 (materials that under very short exposure could cause death or major residual injury); 4 (materials that under very short exposure could cause death or major residual injury); 4 (materials that under very short exposure could cause death or major residual injury); 4 (materials that under very short exposure could cause death or major residual injury); 4 (materials that under very short exposure could cause death or major residual injury); 4 (materials that under very short exposure could cause death or major residual injury); 4 (materials that under very short exposure could cause death or major residual injury); 4 (materials that under very short exposure could cause in the properties of the prop		
	Section 11	LC ₅₀ : Lethal Concentration (gases) which kills 50% of the exposed animals; ppm: Concentration expressed in parts of material per million parts of air or water; mg/m²: Concentration expressed in weight of substance per volume of air; mg/kg: Quantity of material, by weight, administered to a test subject, based on their body weight in kg IARC - the International Agency for Research on Cancer; NTP - the National Toxicology Program, RTECS - the Registry of Toxic Effects of Chemical Substances, OSHA and CAL/OSHA. IARC and NTP rate chemicals on a scale of decreasing potential to cause human cancer with rankings from 1 to 4. Subranking (2A, 2B, etc.) are also used. TDLo, the lowest dose to cause a symptom and TCLo the lowest concentration to cause a symptom; TDo, LDLo, and LDo, or TC, TCo, LCLo, and LCo, the lowest dose (or concentration) to cause lethal or toxic effects. BEI - Biological Exposure Indices, represent the levels of determinants which are most likely to be observed in specimen collected from a healthy worker who has been exposed to chemicals to the same extent as a worker with inhalation exposure to the TLV.		
	Section 12	LC ₅₀ : The lowest concentration in water which kills 50% of the test subjects.		
	Section 12			
	Section 13 Section 14	DOT: US Department of Transportation IATA: International Air Transport Association IMO: International Maritime Organization MARPOL: International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978 IBC Code: Merchant Shipping Code		

Section 15	RCRA: US Resource Conservation and Recovery Act	
	SARA: US Superfund Amendments and Reauthorization Act	
	PSM: US OSHA Process Safety Management	
	CFATS: US Department of Homeland Security Chemical Facility Anti-terrorism Standard	
	DSL: Canadian Domestic Substances List	
	NDSL: Canadian Non-Domestic Substances List	
	REACH: European Registration, Evaluation, Authorization and Restriction of Chemicals list	
	TSCA: US Toxic Substances Control Act	

H Phrases

H225: Highly flammable liquid and vapor H226: Flammable liquid and vapor

H304: May be fatal if swallowed and enters airways H314: Causes severe skin burns and eye damage

H315: Causes skin irritation

H317: May cause an allergic skin reaction

H318: Causes serious eye damage H335: May case respiratory irritation

H401: Toxic to aquatic life H402: Harmful to aquatic life

H412: Harmful to aquatic life with long lasting effects



Safety Data Sheet PALLUBE 32P

SDS Revision Date: 05/02/2015

1. Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product Identity PALLUBE 32P

Alternate Names

1.2. Relevant identified uses of the substance or mixture and uses advised against

Intended use See Technical Data Sheet.

Application Method See Technical Data Sheet.

1.3. Details of the supplier of the safety data sheet

Company Name Sullivan-Palatek, Inc.

1201 West US Highway 20 Michigan City, IN 46360

USA

Emergency

CHEMTREC (USA) (800) 424-9300

Customer Service: Sullivan-Palatek Phone: (800) 438-6203

Fax: (219) 809-0203

2. Hazard identification of the product

2.1. Classification of the substance or mixture

No applicable GHS categories.

2.2. Label elements

Using the Toxicity Data listed in section 11 and 12 the product is labeled as follows.

No applicable GHS categories.

[Prevention]:

No GHS prevention statements

[Response]:

No GHS response statements

[Storage]:

No GHS storage statements

[Disposal]:

No GHS disposal statements

3. Composition/information on ingredients

This product is considered a mixture.

Ingredient/Chemical Designations	Weight %	GHS Classification	Notes
Polypropylene glycol, monobutyl ether CAS Number: 0009003-13-8	50 - 75	Not Classified	

^[1] Substance classified with a health or environmental hazard.

This formulation is considered a trade secret and specific chemical identity and exact percentage (concentration) of composition may have been withheld. Trade secrets are allowable per paragraph (i) of 29 CFR 1910.1200 as long as specific chemical identity and exact percentage composition are available and will be provided to health professionals, employees, or designated representatives in accordance with applicable provisions of paragraph (i).

4. First aid measures

4.1. Description of first aid measures

General In all cases of doubt, or when symptoms persist, seek medical attention.

Never give anything by mouth to an unconscious person.

Inhalation Remove to fresh air, keep patient warm and at rest. If breathing is irregular or stopped, give

artificial respiration. If unconscious place in the recovery position and obtain immediate

medical attention. Give nothing by mouth.

Eyes Irrigate copiously with clean water for at least 15 minutes, holding the eyelids apart and

seek medical attention.

Skin Remove contaminated clothing. Wash skin thoroughly with soap and water or use a

recognized skin cleanser.

Ingestion If swallowed obtain immediate medical attention. Keep at rest. Do NOT induce vomiting.

4.2. Most important symptoms and effects, both acute and delayed

Overview No specific symptom data available.

See section 2 for further details.

5. Fire-fighting measures

5.1. Extinguishing media

Dry chemical, foam, carbon dioxide or water spray.

5.2. Special hazards arising from the substance or mixture

Hazardous decomposition: None under normal use.

5.3. Advice for fire-fighters

In the event of fire, wear full protective clothing and NIOSH Approved Self-contained breathing apparatus with full face piece operated in the pressure demand or other positive pressure mode. Move container from fire area if it can be done without risk. Use water to keep fire exposed containers cool and disperse vapors.

ERG Guide No. ----

^[2] Substance with a workplace exposure limit.

^[3] PBT-substance or vPvB-substance.

^{*}The full texts of the phrases are shown in Section 16.

6. Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

Evacuate personnel to safe areas. Use personal protective equipment.

6.2. Environmental precautions

Do not allow spills to enter drains or waterways.

Use good personal hygiene practices. Wash hands before eating, drinking, smoking or using toilet. Promptly remove soiled clothing and wash thoroughly before reuse.

6.3. Methods and material for containment and cleaning up

Use a non-combustible material like vermiculite, sand or earth to soak up product and place in a container for later disposal. Dike for disposal and cover with wet sand or earth.

7. Handling and storage

7.1. Precautions for safe handling

See section 2 for further details.

7.2. Conditions for safe storage, including any incompatibilities

Handle containers carefully to prevent damage and spillage.

Store in a cool dry place.

Keep containers tightly closed.

Incompatible materials: Incompatible with strong oxidizing agents

See section 2 for further details.

7.3. Specific end use(s)

No data available.

8. Exposure controls and personal protection

8.1. Control parameters

Exposure

CAS No.	Ingredient	Source	Value
0009003-13-8	Polypropylene glycol, monobutyl ether	OSHA	No Established Limit
		ACGIH	No Established Limit
		NIOSH	No Established Limit
		Supplier	No Established Limit

Carcinogen Data

CAS No.	Ingredient	Source	Value
0009003-13-8	Polypropylene glycol, monobutyl ether	OSHA	Select Carcinogen: No
		NTP	Known: No; Suspected: No
		IARC	Group 1: No; Group 2a: No; Group 2b: No; Group 3: No; Group 4: No:

8.2. Exposure controls

Respiratory If workers are exposed to concentrations above the exposure limit they must use the

appropriate, certified respirators.

Eyes Safety glasses with side shields

Skin Overalls which cover the body, arms and legs should be worn. Skin should not be

exposed. All parts of the body should be washed after contact.

Engineering Controls Provide adequate ventilation. Where reasonably practicable this should be achieved by

the use of local exhaust ventilation and good general extraction. If these are not sufficient to maintain concentrations of particulates and any vapor below occupational exposure

limits suitable respiratory protection must be worn.

using toilet. Promptly remove soiled clothing and wash thoroughly before reuse.

9. Physical and chemical properties

Appearance Clear and bright Liquid

Odor Mild

Odor threshold

pH

Not Measured

Not Measured

Not Measured

Pour Point -48 C

Initial boiling point and boiling range

Not Measured

Flash Point 220 C

Evaporation rate (Ether = 1) Not Measured Flammability (solid, gas) Not Applicable

Upper/lower flammability or explosive limits Lower Explosive Limit: Not Measured

Upper Explosive Limit: Not Measured

Vapor pressure (Pa)Not MeasuredVapor DensityNot Measured

Specific Gravity 0.98

Solubility in Water Not Measured
Partition coefficient n-octanol/water (Log Kow) Not Measured

Auto-ignition temperature 366 C

Decomposition temperatureNot MeasuredViscosity (cSt)40.0 @ 40CVOC %Not Measured

9.2. Other information

No other relevant information.

10. Stability and reactivity

10.1. Reactivity

Hazardous Polymerization will not occur.

10.2. Chemical stability

Stable under normal circumstances.

10.3. Possibility of hazardous reactions

No data available.

10.4. Conditions to avoid

None known

10.5. Incompatible materials

Incompatible with strong oxidizing agents

10.6. Hazardous decomposition products

None under normal use.

11. Toxicological information

Acute toxicity

Product is safe for intended use based on the formulation, testing results and the long history of safe consumer use.

Ingredient	Oral LD50, mg/kg	Skin LD50, mg/kg	Inhalation Vapor LD50, mg/L/4hr	Inhalation Dust/Mist LD50, mg/L/4hr	Inhalation Gas LD50, ppm
Polypropylene glycol, monobutyl ether - (9003-13-8)	9,100.00, Rat - Category: NA	No data available	No data available	No data available	No data available

Note: When no route specific LD50 data is available for an acute toxin, the converted acute toxicity point estimate was used in the calculation of the product's ATE (Acute Toxicity Estimate).

Classification	Category	Hazard Description		
Acute toxicity (oral)		Not Applicable		
Acute toxicity (dermal)		Not Applicable		
Acute toxicity (inhalation)		Not Applicable		
Skin corrosion/irritation		Not Applicable		
Serious eye damage/irritation		Not Applicable		
Respiratory sensitization		Not Applicable		
Skin sensitization		Not Applicable		
Germ cell mutagenicity		Not Applicable		
Carcinogenicity		Not Applicable		
Reproductive toxicity		Not Applicable		
STOT-single exposure		Not Applicable		
STOT-repeated exposure		Not Applicable		
Aspiration hazard		Not Applicable		

12. Ecological information

12.1. Toxicity

Aquatic Ecotoxicity

Ingredient	96 hr LC50 fish,	48 hr EC50 crustacea,	ErC50 algae,
	mg/l	mg/l	mg/l

Polypropylene glycol, monobutyl ether - (9003-13-8) Not Available Not Available Not Available

12.2. Persistence and degradability

There is no data available on the preparation itself.

12.3. Bioaccumulative potential

Not Measured

12.4. Mobility in soil

No data available.

12.5. Results of PBT and vPvB assessment

This product contains no PBT/vPvB chemicals.

12.6. Other adverse effects

No data available.

13. Disposal considerations

13.1. Waste treatment methods

Observe all federal, state and local regulations when disposing of this substance.

14. Transport information

DOT (Domestic Surface IMO / IMDG (Ocean ICAO/IATA

IMDG: Not Applicable

Sub Class: Not Applicable

Air Class: Not Applicable

Transportation) **Transportation**) 14.1. UN number Not Regulated Not Applicable Not Regulated Not Regulated Not Regulated

14.2. UN proper shipping Not Regulated name

14.3. Transport hazard **DOT Hazard Class: Not**

class(es)

Applicable

DOT Label: ---

14.4. Packing group Not Applicable Not Applicable Not Applicable

14.5. Environmental hazards

Marine Pollutant: No

14.6. Special precautions for user

No further information

15. Regulatory information

Regulatory Overview The regulatory data in Section 15 is not intended to be all-inclusive, only selected

regulations are represented.

Toxic Substance All components of this material are either listed or exempt from listing on the TSCA

Control Act (TSCA) Inventory. WHMIS Classification Not Regulated

US EPA Tier II Hazards Fire: No

Sudden Release of Pressure: No

Reactive: No Immediate (Acute): No Delayed (Chronic): No

EPCRA 311/312 Chemicals and RQs:

To the best of our knowledge, there are no chemicals at levels which require reporting under this statute.

EPCRA 302 Extremely Hazardous:

To the best of our knowledge, there are no chemicals at levels which require reporting under this statute.

EPCRA 313 Toxic Chemicals:

To the best of our knowledge, there are no chemicals at levels which require reporting under this statute.

Proposition 65 - Carcinogens (>0.0%):

To the best of our knowledge, there are no chemicals at levels which require reporting under this statute.

Proposition 65 - Developmental Toxins (>0.0%):

To the best of our knowledge, there are no chemicals at levels which require reporting under this statute.

Proposition 65 - Female Repro Toxins (>0.0%):

To the best of our knowledge, there are no chemicals at levels which require reporting under this statute.

Proposition 65 - Male Repro Toxins (>0.0%):

To the best of our knowledge, there are no chemicals at levels which require reporting under this statute.

N.J. RTK Substances (>1%):

To the best of our knowledge, there are no chemicals at levels which require reporting under this statute.

Penn RTK Substances (>1%):

To the best of our knowledge, there are no chemicals at levels which require reporting under this statute.

16. Other information

The information and recommendations contained herein are based upon data believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. We accept no responsibility and disclaim all liability for any harmful effects which may be caused by exposure to our products. Customers/users of this product must comply with all applicable health and safety laws, regulations, and orders.

The full text of the phrases appearing in section 3 is: None

This is the first version in the GHS SDS format. Listings of changes from previous versions in other formats are not applicable.

The information provided on the SDS is a correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of Document



Section I: COMPANY INFORMATION AND PRODUCT IDENTIFICATION

490 Circle Freeway Dr., Cincinnati, OH 45246 Phone: 513-874-6550; Fax: 513-874-3612 www.ValcoMelton.com

MSDS FORM: VCI0026 MSDS current as of: 6/05/2012

EMERGENCY TELEPHONE NUMBER: CALL INFOTRAC AT 1-800-535-5053

PRODUCT INFORMATION NUMBER: (513) 874-6550

PRODUCT NAME: **MARKING INK** PRODUCT NUMBER: WHL-300X10 PRODUCT PART NUMBER(S): 713XX059

CHEMICAL FAMILY: FLUORESCENT BRIGHTENER 220 CAS# 16470-24-9

SYNONYM NAME(S): **UV OPTICAL BRIGHTENER SOLUTION**

Section II: HAZARD(S) IDENTIFICATION

CLASSIFICATION: NON-HAZARDOUS

Section III: HAZARDOUS INGREDIENTS COMPOSITION

HMIS CODES: RECOMMENDED HMIS III RATING: 110A

Section IV: FIRST-AID MEASURES

FIRST AID PROCEDURES:

Immediately flush eyes with water for 15 minutes. Lift upper and EYE:

lower lids. Get medical attention immediately.

SKIN: None. INHALATION: None. INGESTION: None

Section V: FIRE AND EXPLOSION HAZARD DATA

AUTO IGNITION: UNKNOWN FLASH POINT: > 250 Degrees F

Method: TAGLIBUE CLOSED TESTER/TAG CLOSED TESTER

UPPER EXPLOSIVE LIMIT (%): N/A **LOWER EXPLOSIVE LIMIT (%):** N/A

EXTINGUISHING MEDIA: DRY CHEMICAL, CO2

SPECIAL FIRE FIGHTING PROCEDURES: ALCOHOL FOAM SELF-CONTAINED BREATHING APPARATUS TO

PROTECT AGAINST POTENTIALLY TOXIC AND IRRITATING

FUMES

FIRE AND EXPLOSION HAZARDS: NEGLIGIBLE FIRE HAZARD WHEN EXPOSED TO HEAT OR

FLAME.

NFPA FLAMMABILITY HAZARD CLASS: 1 = Slight

Section VI: SPILL AND LEAK PROCEDURES

SPILL AND/OR LEAK PROCEDURES: SOAK UP WITH ABSORBANT MATERIAL. AREA CAN BE WASHED

WITH WATER. COLLECT WASH WATER. DO NOT FLUSH INTO

PUBLIC SEWER OR WATERWAY.

Section VII: HANDLING AND STORAGE PRECAUTIONS

CONTROL MEASURES

STORAGE TEMPERATURE: 0 - 100 DEGREES F HANDLING/STORAGE: KEEP FROM FREEZING.

KEEP IN VENTILATED AREA

MINIMIZE CONTACT WITH ATMOSPHERIC AIR

AVOID BREATHING VAPORS

AVOID EATING OR SMOKING AROUND OPEN CONTAINERS.

Section VIII: PERSONAL PROTECTIVE EQUIPMENT, RECOMMENDATIONS

CONDITIONS UNDER WHICH PPE REQUIRED: NORMAL WORK CONDITIONS

EYE PROTECTION REQUIREMENTS: SAFETY GLASSES W/SIDE PROTECTOR SHIELDS. CHEMICAL

GOGGLES

GLOVE REQUIREMENTS: NOT REQUIRED. SUGGEST RUBBER GLOVES

NOT REQUIRED SUGGEST LONG SLEEVES, LONG LEGGED **CLOTHING REQUIREMENTS:**

PANTS

CHANGE/REMOVAL OF CLOTHING: NOT REQUIRED NOT REQUIRED **WASH REQUIREMENTS: RESPIRATOR REQUIREMENTS: NOT REQUIRED VENTILATION REQUIREMENTS:** LOCAL, GENERAL

Section IX: PHYSICAL/CHEMICAL CHARACTERISTICS

PURE MATERIAL OR MIXTURE: MIXTURE PHYSICAL FORM: LIQUID

APPEARANCE/PHYSICAL DESCRIPTION: NON-HAZARDOUS AQUEOUS UV MARKING SOLUTION

pH AS IS:

BOILING POINT: 212 DEGREES F **MELTING/FREEZING POINT:** 32 DEGREES F

SOLUBILITY IN WATER: MISCIBLE SPECIFIC GRAVITY (WATER = 1): 1.01 **BULK DENSITY:** 8.4lb/gal

VOLATILE BY VOLIUME: NOT DETERMINED **EVAPORATION RATE:** >1 WATER VAPOR PRESSURE (mmHg): NOT DETERMINED NOT DETERMINED **VAPOR DENSITY (Air = 1): VOLATILE ORGANIC COMPOUNDS: NOT DETERMINED**

Section X: REACTIVITY DATA

STABILITY: STABLE

INCOMPATIBILITIES: WATER REACTIVE MATERIALS.

NFPA REACTIVITY HAZARD CLASS: 0 = INSIGNIFICANT

HAZARDOUS DECOMPOSITION PRODUCTS: NONE

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR

Section XI: HEALTH EFFECTS/HAZARD DATA - TOXICITY

SHORT TERM EFFECTS OF EXPOSURE:

ROUTE OF ENTRY: INHALATION

ACUTE EFFECTS: NO HAZARD IN NORMAL USAGE. **ROUTE OF ENTRY: INGESTION**

NO HAZARD IN NORMAL USAGE. **ACUTE EFFECTS:**

ROUTE OF ENTRY: SKIN CONTACT

ACUTE EFFECTS: NO HAZARD IN NORMAL USAGE.

ROUTE OF ENTRY: EYE CONTACT

NO HAZARD IN NORMAL USAGE. **ACUTE EFFECTS:**

LONG TERM EFFECTS: None. **SPECIAL HEALTH EFFECTS:** None. TOXICOLOGY INFORMATION: Non-Toxic

Section XII: ECOLOGICAL CONSIDERATIONS

Material is Food Packaging Grade, ref.: FDA 21CFR175.105 DO NOT FLUSH INTO PUBLIC SEWER OR WATERWAY.

Section XIII: DISPOSAL

WATER DISPOSAL METHODS: IN ACCORDANCE WITH, AND, OBSERVING ALL LOCAL, STATE,

AND FEDERAL REGULATIONS.

Section XIV: SHIPPING AND TRANSPORT INFORMATION

DOT SHIPPING NAME:

DOT HAZARD CLASS: NONHAZARDOUS DOT REPORTABILITY QUANTITY: NOT NOTED

Section XV: OTHER REGULATORY/MISCELLANEOUS

TSCA: FDA SARA/TITLE III: ALL COMPONENTS ARE ON THE TSCA INVENTORY.
21CFR175.105
BASED ON THE DATA AVAILABLE, THIS MATERIAL CONTAINS NO SUBSTANCE AT OR ABOVE REPORTING THRESHOLD, PER

SECTION 313.

Section XV-A OTHER REGULATORY/MISCELLANEOUS NON-HAZARDOUS INGREDIENTS

<u>CHEMICAL</u> <u>CAS NO.</u> <u>Wt %</u> <u>EXPOSURE LIMITS</u>

WATER 7732-18-5 PROPRIETARY NSRL
C.I. 220 OPTICAL BRIGHTENER 16470-24-9 PROPRIETARY NSRL
GLYCEROL 56-81-5 PROPRIETARY NSRL

Section XVI: DISCLAIMER

TO THE BEST OF THE KNOWLEDGE OF THE MANAGEMENT AND EMPLOYEES OF VALCO CINCINNATI, INC., THE INFORMATION CONTAINED HEREIN IS ACCURATE; OBTAINED FROM SOURCES BELIEVED TO BE ACCURATE. SINCE THE CONDITIONS AND METHODS OF USE OF THIS PRODUCT IS BEYOND THE CONTROL OF VALCO CINCINNATI, INC., AND IT'S AGENTS, VALCO CINCINNATI, INC. DISCLAIMS ALL LIABILITY ARISING FROM THE USE, AND/OR MISUSE, OF THIS PRODUCT AND THE INFORMATION CONTAINED THEREIN.

Notes:

This data is furnished gratuitously independent of sale of the product and only for your investigation and independent verification while data is believed to be correct. Valco Cincinnati shall in no event be liable or responsible for damages whatsoever, directly or indirectly, resulting from the publication or use of or reliance upon data contained herein. No warranty, either implied or expressed, of merchantability of fitness or of any nature with respect to the product or to the data is made herein. You are urged to obtain data sheets for Valco Cincinnati materials you buy, process, use or distribute, and are encouraged to advise anyone working with or exposed to such materials of the information contained herein.

Sources:

- 1. Dangerous Properties of Industrial Material
- 2. Condensed Chemical Dictionary
- 3. Handbook of Toxic Hazardous Chemicals and Carcinogens
- 4. TLV's and Biological Exposure Indices for 1985-86
- 5. Director's List of Hazardous Substances
- 6. Title 29 CFR Parts 1900 to 1910
- 7. Documentation of TLV's and BEI's
- 8. Guidelines for the Selection of Chemical Protective Clothing
- 9. Emergency Response Guidebook

SAFETY DATA SHEET

1. Identification

Product identifier QD® Contact Cleaner

Other means of identification

Product code 02130

Recommended use Electronic cleaner Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufactured or sold by:

CRC Industries, Inc. Company name

Address 885 Louis Dr.

Warminster, PA 18974 US

Telephone

General Information 215-674-4300 **Technical** 800-521-3168

Assistance

800-272-4620 **Customer Service** 24-Hour Emergency 800-424-9300 (US)

(CHEMTREC) 703-527-3887 (International) Website www.crcindustries.com

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1

> Gases under pressure Liquefied gas

Health hazards Reproductive toxicity Category 2

> Specific target organ toxicity, single exposure Category 3 narcotic effects

Specific target organ toxicity, repeated

exposure

Aspiration hazard Category 1

Hazardous to the aquatic environment, acute **Environmental hazards** Category 2

Hazardous to the aquatic environment, long-term hazard

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Extremely flammable aerosol. Contains gas under pressure; may explode if heated. May be fatal if

swallowed and enters airways. May cause drowsiness or dizziness. May cause damage to organs (central nervous system, eyes, skin, upper respiratory tract) through prolonged or repeated exposure. Suspected of damaging fertility. Toxic to aquatic life. Toxic to aquatic life with long

Category 2

Category 2

lasting effects.

02130 Version #: 02 Revision date: 09-28-2015 Issue date: 09-29-2014

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Do not apply while equipment is energized. Pressurized container: Do not pierce or burn, even after use. Extinguish all flames, pilot lights and heaters. Vapors will accumulate readily and may ignite. Use only with adequate ventilation; maintain ventilation during use and until all vapors are gone. Open doors and windows or use other means to ensure a fresh air supply during use and while product is drying. If you experience any symptoms listed on this label, increase ventilation or leave the area. Do not breathe gas. Do not breathe mist or vapor. Wear protective gloves/protective clothing/eye protection/face protection. Avoid release to the environment.

Response

If swallowed: Immediately call a poison center/doctor. Do NOT induce vomiting. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell. If exposed or concerned: Get medical attention. Collect spillage.

Storage

Store in a well-ventilated place. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Exposure to high temperature may cause can to burst.

Disposal

Dispose of contents/container in accordance with local/regional/national regulations.

Hazard(s) not otherwise classified (HNOC)

Static accumulating flammable liquid can become electrostatically charged even in bonded and grounded equipment. Sparks may ignite liquid and vapor. May cause flash fire or explosion.

3. Composition/information on ingredients

Mixtures

Chemical name Common name and synonyms		CAS number	%	
Naphtha (petroleum), hydrotreated light		64742-49-0	60 - 70	
1,1-Difluoroethane	HFC-152a	75-37-6	20 - 30	
n-Hexane		110-54-3	3-5	
2,2,4-Trimethylpentane		540-84-1	1-3	
Isopropyl alcohol		67-63-0	1-3	
2,2-Dimethylbutane		75-83-2	< 0.2	
2-Methylpentane		107-83-5	< 0.2	

Specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON		
	CENTER or doctor/physician if you feel unwell.		

Skin contact Rinse skin with water/shower. Get medical attention if irritation develops and persists.

Eye contact Rinse with water. Get medical attention if irritation develops and persists.

Ingestion Call a physician or poison control center immediately. Rinse mouth, Do not induce vomiting, If

vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Most important symptoms/effects, acute and

delayed

May cause drowsiness and dizziness. Headache. Nausea, vomiting. Aspiration may cause pulmonary edema and pneumonitis. Prolonged exposure may cause chronic effects.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.

General information

IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media Water fog. Foam. Carbon dioxide (CO2). Dry chemical powder, carbon dioxide, sand or earth may be used for small fires only.

Unsuitable extinguishing media

None known.

Material name: QD® Contact Cleaner

SDS US

02130 Version #: 02 Revision date: 09-28-2015 Issue date: 09-29-2014

Specific hazards arising from the chemical

Contents under pressure. Pressurized container may rupture when exposed to heat or flame. This product is a poor conductor of electricity and can become electrostatically charged. If sufficient charge is accumulated, ignition of flammable mixtures can occur. Static electricity accumulation may be significantly increased by the presence of small quantities of water or other contaminants. Material will float and may ignite on surface of water. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

General fire hazards

Extremely flammable aerosol. Contents under pressure. Pressurized container may rupture when exposed to heat or flame.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Remove all possible sources of ignition in the surrounding area. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapor. Do not breathe gas. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Use appropriate containment to avoid environmental contamination. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. This material is classified as a water pollutant under the Clean Water Act and should be prevented from contaminating soil or from entering sewage and drainage systems which lead to waterways. Stop the flow of material, if this is without risk. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases. Use appropriate containment to avoid environmental contamination.

7. Handling and storage

Precautions for safe handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Minimize fire risks from flammable and combustible materials (including combustible dust and static accumulating liquids) or dangerous reactions with incompatible materials. Handling operations that can promote accumulation of static charges include but are not limited to: mixing, filtering, pumping at high flow rates, splash filling, creating mists or sprays, tank and container filling, tank cleaning, sampling, gauging, switch loading, vacuum truck operations. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. Use caution around energized equipment. The metal container will conduct electricity if it contacts a live source. This may result in injury to the user from electrical shock and/or flash fire. Do not breathe mist or vapor. Do not breathe gas. Avoid prolonged exposure. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices. For product usage instructions, please see the product label.

Conditions for safe storage, including any incompatibilities

Level 3 Aerosol.

Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Avoid spark promoters. These alone may be insufficient to remove static electricity. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

cupational exposure limits			
US. OSHA Table Z-1 Limits for A	ir Contaminants (29 CFR 1910.	1000)	
Components	Туре	Value	
2,2,4-Trimethylpentane (CAS 540-84-1)	PEL	2350 mg/m3	
Manday Scarred My		500 ppm	

Material name: QD® Contact Cleaner

Components		Туре		Va	lue		
Isopropyl alcohol (CAS 67-63-0)		PEL			980 mg/m3		
				40	0 ppm		
n-Hexane (CAS 110-54-3)		PEL		18	1800 mg/m3		
					500 ppm		
US. ACGIH Threshold Lir	nit Values						
Components		Туре		Va	lue		
2,2-Dimethylbutane (CAS 75-83-2)		STEL		10	00 ppm		
		TWA		50	0 ppm		
2-Methylpentane (CAS 107-83-5)		STEL		10	00 ppm		
		TWA		50	0 ppm		
Isopropyl alcohol (CAS		STEL			0 ppm		
67-63-0)					2700		
		TWA			0 ppm		
n-Hexane (CAS 110-54-3)		TWA		50	ppm		
US. NIOSH: Pocket Guide	to Chemical Ha	zards					
Components		Туре		Va	lue		
2,2,4-Trimethylpentane (CAS 540-84-1)		Ceiling		18	00 mg/m3		
(3.13.21.7)				38	5 ppm		
		TWA			0 mg/m3		
					ppm		
2,2-Dimethylbutane (CAS 75-83-2)		Ceiling			00 mg/m3		
. 7/22 JA				51	0 ppm		
		TWA		35	0 mg/m3		
					0 ppm		
2-Methylpentane (CAS 107-83-5)		Ceiling			00 mg/m3		
				51	0 ppm		
		TWA		35	0 mg/m3		
				10	0 ppm		
Isopropyl alcohol (CAS 67-63-0)		STEL		12	25 mg/m3		
					0 ppm		
		TWA			0 mg/m3		
					0 ppm		
n-Hexane (CAS 110-54-3)		TWA			0 mg/m3		
**************************************		7-11.1		50 ppm			
US. AIHA Workplace Env	ironmental Expo	sure Level (WEE	L) Guides				
Components		Туре		Va	lue		
1,1-Difluoroethane (CAS 75-37-6)		TWA		27	00 mg/m3		
				10	00 ppm		
ogical limit values							
ACGIH Biological Exposi	ure Indices						
Components	Value	Determin	nant S	Specimen	Sampling Time		
Isopropyl alcohol (CAS	40 mg/l				*		

ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time	
n-Hexane (CAS 110-54-3)	0.4 mg/l	2,5-Hexanedio n, without hydrolysis	Urine	*	

^{* -} For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

n-Hexane (CAS 110-54-3) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

n-Hexane (CAS 110-54-3)

Can be absorbed through the skin.

Appropriate engineering

controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear protective gloves such as: Nitrile. Polyvinyl chloride (PVC). Viton®.

Other Wear suitable protective clothing.

NIOSH-approved cartridge respirator with an organic vapor cartridge. Use a self-contained breathing apparatus in confined spaces and for emergencies. Air monitoring is needed to

determine actual employee exposure levels.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid.
Form Aerosol.

Color Clear, Colorless,

Odor Alcoholic.
Odor threshold Not available.
pH Not available.

Melting point/freezing point -127.3 °F (-88.5 °C) estimated Initial boiling point and boiling 123 °F (50.6 °C) estimated

range

Flash point < 0 °F (< -17.8 °C) Tag Closed Cup

Evaporation rate Very fast.

Flammability (solid, gas) Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower 0.9 % e

(%)

0.9 % estimated

Flammability limit - upper

12 % estimated

(%)

Vapor pressure 2141.3 hPa estimated

Vapor density> 1 (air = 1)Relative density0.72 estimatedSolubility (water)Negligible.

Partition coefficient (n-octanol/water)

Not available.

Auto-ignition temperature

489.2 °F (254 °C) estimated

Decomposition temperature Not available. Viscosity (kinematic) Not available. Percent volatile 100 % estimated

10. Stability and reactivity

Reactivity

The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability

Material is stable under normal conditions.

Possibility of hazardous

No dangerous reaction known under conditions of normal use.

reactions Conditions to avoid

Heat, flames and sparks. Contact with incompatible materials.

Incompatible materials

Strong oxidizing agents. Strong acids.

Hazardous decomposition

products

Carbon oxides.

11. Toxicological information

Information on likely routes of exposure

Inhalation May cause damage to organs through prolonged or repeated exposure by inhalation. May cause

drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be harmful.

Skin contact No adverse effects due to skin contact are expected. Eye contact Direct contact with eyes may cause temporary irritation.

Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious Ingestion

chemical pneumonia.

Symptoms related to the physical, chemical and toxicological characteristics May cause drowsiness and dizziness. Headache. Nausea, vomiting. Aspiration may cause

pulmonary edema and pneumonitis.

Information on toxicological effects

Acute toxicity	May be fatal if swallowed and enters airways. Narcotic effects.
----------------	-----------------------------------------------------------------

Product Species		Test Results		
QD® Contact Cleaner				

Acute

Dermal

LD50 Rabbit 2807 mg/kg estimated

Inhalation

Rat 29004 ppm, 4 hours estimated LC50

30 mg/l, 4 hours estimated

Oral

LD50 Rat 21092 mg/kg estimated

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation. Serious eye damage/eye Direct contact with eyes may cause temporary irritation.

irritation

Not available. Respiratory sensitization

This product is not expected to cause skin sensitization. Skin sensitization

No data available to indicate product or any components present at greater than 0.1% are Germ cell mutagenicity

mutagenic or genotoxic.

This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. Carcinogenicity

IARC Monographs. Overall Evaluation of Carcinogenicity

Not available.

US. National Toxicology Program (NTP) Report on Carcinogens

Not available.

Material name: QD® Contact Cleaner 02130 Version #: 02 Revision date: 09-28-2015 Issue date: 09-29-2014

^{*} Estimates for product may be based on additional component data not shown.

Reproductive toxicity

Suspected of damaging fertility.

Specific target organ toxicity -

single exposure

May cause drowsiness and dizziness.

Specific target organ toxicity -

icity - May cause damage to organs through prolonged or repeated exposure: Central nervous system.
 Eyes. Skin. Upper respiratory tract.

repeated exposure
Aspiration hazard

May be fatal if swallowed and enters airways. If aspirated into lungs during swallowing or vomiting,

may cause chemical pneumonia, pulmonary injury or death.

Chronic effects

Prolonged inhalation may be harmful. May cause damage to organs through prolonged or

repeated exposure.

12. Ecological information

otoxicity	Toxic to a	aquatic life with long lasting effects.		
Product		Species	Test Results	
QD® Contact Cleaner		1 4		
Aquatic				
Fish	LC50	Fish	1703.5929 mg/l, 96 hours estimated	
Components		Species	Test Results	
Isopropyl alcohol (CAS	67-63-0)			
Aquatic				
Acute				
Crustacea	EC50	Water flea (Daphnia magna)	7550 - 13299 mg/l, 48 hours	
Fish	LC50	Fathead minnow (Pimephales promelas)	3200 mg/l, 96 hours	
n-Hexane (CAS 110-54-	-3)			
Aquatic				
Fish	LC50	Fathead minnow (Pimephales promelas)	2.101 - 2.981 mg/l, 96 hours	

^{*} Estimates for product may be based on additional component data not shown.

Persistence and degradability

No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

1,1-Difluoroethane	0.75
2,2,4-Trimethylpentane	5.18
2,2-Dimethylbutane	3.82
2-Methylpentane	3.74
Isopropyl alcohol	0.05
n-Hexane	3.9

Mobility in soil No data available.

Other adverse effects

No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal of waste from residues / unused products

If discarded, this product is considered a RCRA ignitable waste, D001. Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose in accordance

with all applicable regulations.

Hazardous waste code

D001: Waste Flammable material with a flash point <140 F

Contaminated packaging

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is

emptied.

14. Transport information

DOT

UN number UN1950

UN proper shipping name Aerosols, flammable, Limited Quantity

Transport hazard class(es)

Class 2.1

Material name: QD® Contact Cleaner

SDS US

Subsidiary risk -Label(s) 2.1

Packing group Not applicable.

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisionsN82Packaging exceptions306Packaging non bulkNonePackaging bulkNone

IMDG

UN number UN1950

UN proper shipping name AEROSOLS, LIMITED QUANTITY

Transport hazard class(es)

Class 2 Subsidiary risk -

Packing group Not applicable.

Environmental hazards

Marine pollutant No. EmS F-D, S-U

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IATA

UN number UN1950

UN proper shipping name Aerosols, flammable, Limited Quantity

Transport hazard class(es)

Class 2.1 Subsidiary risk -

Packing group Not applicable.

Environmental hazards No. ERG Code 10L

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo Allowed with restrictions.

aircraft

Cargo aircraft only Allowed with restrictions.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

SARA 304 Emergency release notification

Not regulated.

US EPCRA (SARA Title III) Section 313 - Toxic Chemical: Listed substance

n-Hexane (CAS 110-54-3)

CERCLA Hazardous Substance List (40 CFR 302.4)

2,2,4-Trimethylpentane (CAS 540-84-1) Listed. n-Hexane (CAS 110-54-3) Listed.

CERCLA Hazardous Substances: Reportable quantity

2,2,4-Trimethylpentane (CAS 540-84-1) 1000 LBS n-Hexane (CAS 110-54-3) 5000 LBS

Spills or releases resulting in the loss of any ingredient at or above its RQ require immediate notification to the National Response Center (800-424-8802) and to your Local Emergency Planning Committee.

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

2,2,4-Trimethylpentane (CAS 540-84-1)

n-Hexane (CAS 110-54-3)

Material name: QD® Contact Cleaner

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

1,1-Difluoroethane (CAS 75-37-6)

Safe Drinking Water Act

Not regulated.

(SDWA)

FEMA Priority Substances Respiratory Health and Safety in the Flavor Manufacturing Workplace

Isopropyl alcohol (CAS 67-63-0)

Low priority

Food and Drug

Not regulated.

Administration (FDA)

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Section 311/312 Immediate Hazard - Yes
Hazard categories Delayed Hazard - Yes
Fire Hazard - Yes
Pressure Hazard - Yes

Reactivity Hazard - No

SARA 302 Extremely hazardous substance

US state regulations

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd.

(a))

2,2,4-Trimethylpentane (CAS 540-84-1)

Isopropyl alcohol (CAS 67-63-0)

Naphtha (petroleum), hydrotreated light (CAS 64742-49-0)

No

n-Hexane (CAS 110-54-3)

US. New Jersey Worker and Community Right-to-Know Act

2,2,4-Trimethylpentane (CAS 540-84-1)

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. Massachusetts RTK - Substance List

1,1-Difluoroethane (CAS 75-37-6)

2,2,4-Trimethylpentane (CAS 540-84-1)

Isopropyl alcohol (CAS 67-63-0)

n-Hexane (CAS 110-54-3)

US. New Jersey Worker and Community Right-to-Know Act

1,1-Difluoroethane (CAS 75-37-6)

Isopropyl alcohol (CAS 67-63-0)

n-Hexane (CAS 110-54-3)

US. Pennsylvania Worker and Community Right-to-Know Law

Isopropyl alcohol (CAS 67-63-0)

US. Rhode Island RTK

1,1-Difluoroethane (CAS 75-37-6)

2,2,4-Trimethylpentane (CAS 540-84-1)

n-Hexane (CAS 110-54-3)

US. Pennsylvania Worker and Community Right-to-Know Law

2,2,4-Trimethylpentane (CAS 540-84-1)

n-Hexane (CAS 110-54-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

Volatile organic compounds (VOC) regulations

EPA

VOC content (40 CFR

74.3 %

51.100(s))

Consumer products

Not regulated

(40 CFR 59, Subpt. C)

State

Consumer products

This product is regulated as an Electronic Cleaner. This product is compliant for use in all 50

states.

VOC content (CA)

74.3 %

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date	09-29-2014
Revision date	09-28-2015
Prepared by	Allison Cho
Spiriting Committee and Commit	

Version # 02

Further information CRC # 957
HMIS® ratings Health: 1*

Flammability: 4 Physical hazard: 0 Personal protection: B

NFPA ratings Health: 1

Flammability: 4 Instability: 0

NFPA ratings



Disclaimer

The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. This information is accurate to the best of CRC Industries' knowledge or obtained from sources believed by CRC to be accurate. Before using any product, read all warnings and directions on the label. For further clarification of any information contained on this (M)SDS consult your supervisor, a health & safety professional, or CRC Industries.

SAFETY DATA SHEET

1. Identification

Product identifier **Dry Moly Lube**

Other means of identification

Product code 03084

Recommended use Dry film lubricant Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufactured or sold by:

CRC Industries, Inc. Company name

885 Louis Dr. Address

Warminster, PA 18974 US

Telephone

215-674-4300 **General Information** 800-521-3168 **Technical**

Assistance

Customer Service 800-272-4620 24-Hour Emergency 800-424-9300 (US)

703-527-3887 (International) (CHEMTREC) Website www.crcindustries.com

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1

> Gases under pressure Liquefied gas Serious eye damage/eye irritation Category 2 Reproductive toxicity (the unborn child) Category 2

Specific target organ toxicity, single exposure Category 3 respiratory tract irritation

Specific target organ toxicity, single exposure Category 3 narcotic effects

Specific target organ toxicity, repeated

exposure

Category 2

Category 1 Aspiration hazard

Environmental hazards Hazardous to the aquatic environment, acute

Category 3

Hazardous to the aquatic environment,

long-term hazard

Category 3

OSHA defined hazards Not classified.

Label elements

Health hazards



Signal word

Danger

Extremely flammable aerosol. Pressurized container: May burst if heated. Contains gas under Hazard statement pressure; may explode if heated. May be fatal if swallowed and enters airways. Causes serious

eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. Suspected of damaging the unborn child. May cause damage to organs (brain, nervous system) through prolonged or repeated exposure. Harmful to aquatic life. Harmful to aquatic life with long lasting

effects.

Material name: Dry Moly Lube

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Do not apply while equipment is energized. Do not pierce or burn, even after use. Extinguish all flames, pilot lights and heaters. Vapors will accumulate readily and may ignite. Use only with adequate ventilation; maintain ventilation during use and until all vapors are gone. Open doors and windows or use other means to ensure a fresh air supply during use and while product is drying. If you experience any symptoms listed on this label, increase ventilation or leave the area. Do not breathe gas. Do not breathe mist or vapor. Wash thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection. Avoid release to the environment.

Response

If swallowed: Immediately call a poison center/doctor. Do NOT induce vomiting. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention. If exposed or concerned: Get medical attention. Call a POISON CENTER or doctor/physician if you feel unwell.

Storage

Store in a well-ventilated place. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Exposure to high temperature may cause can to burst.

Disposal

Dispose of contents/container in accordance with local/regional/national regulations.

Hazard(s) not otherwise classified (HNOC)

None known.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Acetone		67-64-1	30 - 40
Isopropyl alcohol		67-63-0	20 - 30
n-Butane		106-97-8	20 - 30
Propane		74-98-6	5 - 10
Heptane, branched, cyclic and linear		426260-76-6	3 - 5
Molybdenum disulphide		1317-33-5	1 - 3
n-Heptane		142-82-5	1-3
Solvent Naphtha (petroleum), Medium Aliph.		64742-88-7	1 - 3

Specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON
	CENTER or doctor/physician if you feel unwell.

Skin contact Rinse skin with water/shower. Get medical attention if irritation develops and persists.

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if

present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists.

Ingestion Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If

vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Most important symptoms/effects, acute and delayed May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation.

Prolonged exposure may cause chronic effects.

Indication of immediate medical attention and special treatment needed

General information

Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.

IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).

Material name: Dry Moly Lube

Unsuitable extinguishing media

None known.

Specific hazards arising from the chemical

Contents under pressure. Pressurized container may rupture when exposed to heat or flame. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

Fire-fighting equipment/instructions General fire hazards

In case of fire: Stop leak if safe to do so. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up.

Extremely flammable aerosol. Contents under pressure. Pressurized container may rupture when exposed to heat or flame.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapor. Do not breathe gas. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop the flow of material, if this is without risk. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS. Prevent entry into waterways, sewer, basements or confined areas.

Environmental precautions

Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.

7. Handling and storage

Precautions for safe handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. Use caution around energized equipment. The metal container will conduct electricity if it contacts a live source. This may result in injury to the user from electrical shock and/or flash fire. Do not breathe mist or vapor. Do not breathe gas. Avoid contact with eyes. Avoid prolonged exposure. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices. For product usage instructions, please see the product label.

Conditions for safe storage, including any incompatibilities Level 3 Aerosol.

Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Components	Туре	Value	Form
Acetone (CAS 67-64-1)	PEL	2400 mg/m3	
		1000 ppm	
Isopropyl alcohol (CAS 67-63-0)	PEL	980 mg/m3	
		400 ppm	
Molybdenum disulphide (CAS 1317-33-5)	PEL	15 mg/m3	Total dust.
n-Heptane (CAS 142-82-5)	PEL	2000 mg/m3	
		500 ppm	
Propane (CAS 74-98-6)	PEL	1800 mg/m3	

Material name: Dry Moly Lube

SDS US

03084 Version #: 01 Issue date: 02-26-2015

	Type	<u> </u>	Va	lue	Form
ED 4040 4000			10	00 ppm	
FR 1910.1000)	Туре		Va	lue	
		g			
	IVVA		20	0 ppm	
nit Values	12000		4.5	2.00	230
	Type		Va	lue	Form
	STEL		75	0 ppm	
	TWA		50	0 ppm	
	STEL		40	0 ppm	
	714/4		-		
	TWA		3 r	ng/m3	Respirable fraction.
			10	mg/m3	Inhalable fraction.
	STEL				
					Non-aerosol.
	TWA		20	ppm	
to Chemical H	azards				
	Type		Va	lue	
	TWA		59	0 mg/m3	
			25	0 ppm	
	STEL				
			50	0 ppm	
	TWA			40.4	
	TWA				
			80	0 ppm	
r a	Ceiling	g			
	TWA		35	0 mg/m3	
	TWA		18	00 mg/m3	
			10	00 ppm	
	TWA		10	0 mg/m3	
	STEI		56	0 mg/m3	
	OILL				
	ΤΜΔ			The State of the Control of the Cont	
	IVVA				
re Indices					
Value		Determinant	Specimen	Sampling Time	
50 mg/l		Acetone	Urine	*	
40 mg/l		Acetone	Urine	*	
3					
	re Indices Value 50 mg/l	CFR 1910.1000) Type Ceiling TWA nit Values Type STEL TWA STEL TWA TWA TWA TWA TWA STEL TWA TWA TWA STEL TWA TWA STEL TWA TWA STEL TWA TWA STEL TWA	Type Ceiling TWA Init Values Type STEL TWA STEL TWA TWA TWA TWA TWA TWA STEL TWA TWA TWA Ceiling TWA TWA STEL TWA TWA STEL TWA TWA STEL TWA TWA STEL TWA TWA STEL TWA TWA STEL TWA TWA STEL TWA TWA Ceiling TWA TWA TWA TWA TWA TWA TWA TWA	Type	Type Value

Material name: Dry Moly Lube 03084 Version #: 01 Issue date: 02-26-2015

ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time	
-	0.03 mg/l	Toluene	Urine	*	
	0.02 mg/l	Toluene	Blood	*	

^{* -} For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Toluene (CAS 108-88-3)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Toluene (CAS 108-88-3) Skin designation applies.

US ACGIH Threshold Limit Values: Skin designation

Solvent Naphtha (petroleum), Medium Aliph. (CAS Can be absorbed through the skin.

64742-88-7)

Appropriate engineering

controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Provide eyewash station.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear protective gloves such as: Nitrile. Neoprene.

Other Wear suitable protective clothing. Use of an impervious apron is recommended.

Respiratory protection If engineering controls are not feasible or if exposure exceeds the applicable exposure limits, use a

NIOSH-approved cartridge respirator with an organic vapor cartridge. Use a self-contained breathing apparatus in confined spaces and for emergencies. Air monitoring is needed to

determine actual employee exposure levels.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid. Form Aerosol. Color Gray. Odor Solvent. Not available. Odor threshold Not available. pH Melting point/freezing point Not available. < 395 °F (< 201.7 °C) Initial boiling point and boiling

range

Flash point < 0 °F (< -17.8 °C) Tag Closed Cup

Evaporation rate Not available.

Flammability (solid, gas) Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower 1 %

(%)

Flammability limit - upper 12.8 %

(%)

Vapor pressure 1494.5 hPa estimated

Vapor density > 1 (air = 1)

SDS US

Relative density 0.71

Solubility (water) Not available.

Partition coefficient Not available.

(n-octanol/water)

Auto-ignition temperature 410 °F (210 °C) estimated

Decomposition temperature Not available.

Viscosity (kinematic) Not available.

Percent volatile 98 %

10. Stability and reactivity

Reactivity The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous

reactions

No dangerous reaction known under conditions of normal use.

Conditions to avoid Heat, flames and sparks. Contact with incompatible materials.

Incompatible materials Acids. Strong oxidizing agents. Nitrates. Isocyanates. Fluorine. Chlorine.

Hazardous decomposition

products

Carbon oxides.

11. Toxicological information

Information on likely routes of exposure

Ingestion Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious

chemical pneumonia.

Inhalation May cause damage to organs through prolonged or repeated exposure by inhalation. May cause

drowsiness and dizziness. Headache. Nausea, vomiting. May cause irritation to the respiratory

system. Prolonged inhalation may be harmful.

Skin contact Prolonged skin contact may cause temporary irritation.

Eye contact Causes serious eye irritation.

Symptoms related to the physical, chemical and toxicological characteristics

May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation.

Toot Doculto

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

Product	Species	rest Results
Dry Moly Lube		
Acute		
Dermal		
LD50	Rabbit	9027.8184 mg/kg estimated
Inhalation		
LC50	Rat	25927.2324 ppm, 4 hours estimated
		1108.0551 mg/l, 4 hours estimated
Oral		
LD50	Rat	8209.0645 mg/kg estimated

^{*} Estimates for product may be based on additional component data not shown.

Chanina

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation.

Serious eye damage/eye

irritation

Draduct

Causes serious eye irritation.

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity

No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

Reproductive toxicity Suspected of damaging the unborn child.

Material name: Dry Moly Lube

SDS US

03084 Version #: 01 Issue date: 02-26-2015

Specific target organ toxicity single exposure

May cause respiratory irritation. May cause drowsiness and dizziness.

Specific target organ toxicity -

repeated exposure

May cause damage to organs through prolonged or repeated exposure: Brain. Nervous system.

Aspiration hazard

May be fatal if swallowed and enters airways. If aspirated into lungs during swallowing or vomiting,

may cause chemical pneumonia, pulmonary injury or death.

Chronic effects

Prolonged inhalation may be harmful. May cause damage to organs through prolonged or repeated exposure.

12. Ecological information

otoxicity	Harmful to	o aquatic life with long lasting effects.	
Product		Species	Test Results
Dry Moly Lube			
Aquatic			
Crustacea	EC50	Daphnia	3794.1357 mg/l, 48 hours estimated
Acute			
Fish	LC50	Fish	91.3044 mg/l, 96 hours estimated
Components		Species	Test Results
Acetone (CAS 67-64-1	1)		
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	21.6 - 23.9 mg/l, 48 hours
Fish	LC50	Rainbow trout, donaldson trout (Oncorhynchus mykiss)	4740 - 6330 mg/l, 96 hours
Isopropyl alcohol (CAS	67-63-0)		
Aquatic			
Fish	LC50	Bluegill (Lepomis macrochirus)	> 1400 mg/l, 96 hours
n-Heptane (CAS 142-8	82-5)		
Aquatic			
Acute			
Fish	LC50	Fathead minnow (Pimephales promelas)	2.1 - 2.98 mg/l, 96 hours

^{*} Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

Acetone	-0.24
Isopropyl alcohol	0.05
n-Butane	2.89
n-Heptane	4.66
Propane	2.36

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal of waste from residues / unused products

If discarded, this product is considered a RCRA ignitable waste, D001. Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose in accordance with all applicable regulations.

Hazardous waste code Contaminated packaging D001: Waste Flammable material with a flash point <140 F

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is

emptied.

Material name: Dry Moly Lube

SDS US

14. Transport information

DOT

UN1950 **UN number**

UN proper shipping name Aerosols, flammable, Limited Quantity

Transport hazard class(es)

Class 2.1 Subsidiary risk 2.1 Label(s)

Not applicable. Packing group

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisions 306 Packaging exceptions Packaging non bulk None Packaging bulk None

IATA

UN1950 **UN number**

UN proper shipping name Aerosols, flammable, Limited Quantity

Transport hazard class(es)

Class 2.1 Subsidiary risk

Packing group Not applicable.

Environmental hazards Yes 10L **ERG Code**

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo

aircraft

Allowed.

Cargo aircraft only Allowed.

IMDG

UN number UN1950

UN proper shipping name AEROSOLS, LIMITED QUANTITY, MARINE POLLUTANT

Transport hazard class(es)

Class 2 Subsidiary risk

Not applicable. **Packing group**

Environmental hazards

Marine pollutant Yes F-D. S-U

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

SARA 304 Emergency release notification

Not regulated.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

US EPCRA (SARA Title III) Section 313 - Toxic Chemical: Listed substance

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

Acetone (CAS 67-64-1) Isopropyl alcohol (CAS 67-63-0)

Toluene (CAS 108-88-3)

CERCLA Hazardous Substances: Reportable quantity

Acetone (CAS 67-64-1) 5000 LBS Isopropyl alcohol (CAS 67-63-0) 100 LBS

Material name: Dry Moly Lube

SDS US

Toluene (CAS 108-88-3)

1000 LBS

Spills or releases resulting in the loss of any ingredient at or above its RQ require immediate notification to the National Response Center (800-424-8802) and to your Local Emergency Planning Committee.

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

n-Butane (CAS 106-97-8) Propane (CAS 74-98-6)

Safe Drinking Water Act

Not regulated.

(SDWA)

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

Acetone (CAS 67-64-1) 6532 Toluene (CAS 108-88-3) 6594

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV Toluene (CAS 108-88-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532 Toluene (CAS 108-88-3) 594

Food and Drug Not regulated.

Administration (FDA)

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Section 311/312 Immediate Hazard - Yes
Hazard categories Delayed Hazard - Yes
Fire Hazard - Yes
Pressure Hazard - Yes
Reactivity Hazard - No

SARA 302 Extremely No

hazardous substance

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1) n-Heptane (CAS 142-82-5) Isopropyl alcohol (CAS 67-63-0) n-Butane (CAS 106-97-8) Propane (CAS 74-98-6)

Solvent Naphtha (petroleum), Medium Aliph. (CAS 64742-88-7)

Toluene (CAS 108-88-3)

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)

Isopropyl alcohol (CAS 67-63-0)

Molybdenum disulphide (CAS 1317-33-5)

n-Butane (CAS 106-97-8) n-Heptane (CAS 142-82-5) Propane (CAS 74-98-6)

Solvent Naphtha (petroleum), Medium Aliph. (CAS 64742-88-7)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1)

Isopropyl alcohol (CAS 67-63-0)

Toluene (CAS 108-88-3) n-Butane (CAS 106-97-8)

n-Heptane (CAS 142-82-5) Propane (CAS 74-98-6)

Solvent Naphtha (petroleum), Medium Aliph. (CAS 64742-88-7)

US. Rhode Island RTK

Acetone (CAS 67-64-1)

Isopropyl alcohol (CAS 67-63-0)

Material name: Dry Moly Lube

List and the second second

n-Butane (CAS 106-97-8) Propane (CAS 74-98-6) Toluene (CAS 108-88-3)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

Benzene (CAS 71-43-2) Listed: February 27, 1987 Ethanal (CAS 75-07-0) Listed: April 1, 1988

US - California Proposition 65 - CRT: Listed date/Developmental toxin

Benzene (CAS 71-43-2) Listed: December 26, 1997
Toluene (CAS 108-88-3) Listed: January 1, 1991
US - California Proposition 65 - CRT: Listed date/Female reproductive toxin

Toluene (CAS 108-88-3) Listed: August 7, 2009

US - California Proposition 65 - CRT: Listed date/Male reproductive toxin

Benzene (CAS 71-43-2) Listed: December 26, 1997

Volatile organic compounds (VOC) regulations

EPA

VOC content (40 CFR 61.8 %

51.100(s))

Consumer products Not regulated

(40 CFR 59, Subpt. C)

State

Consumer products This product is regulated as a Dry Lubricant. This product is compliant for use in all 50 states.

VOC content (CA) 61.8 % VOC content (OTC) 61.8 %

International Inventories

Country(s) or region

Country(s) or region	inventory name	On inventory (yes/no)
Australia	Australian Inventory of Chemical Substances (AICS)	No
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	No
New Zealand	New Zealand Inventory	No
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

16. Other information, including date of preparation or last revision

Inventory name

Issue date 02-26-2015
Prepared by Allison Cho
Version # 01

Further information Not available.

HMIS® ratings Health: 2*

Flammability: 4
Physical hazard: 0
Personal protection: B

NFPA ratings
Health: 2
Flammability: 4
Instability: 0

Material name: Dry Moly Lube

On inventory (vector)*

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

NFPA ratings



Disclaimer

CRC cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. This information is accurate to the best of CRC Industries' knowledge or obtained from sources believed by CRC to be accurate. Before using any product, read all warnings and directions on the label. For further clarification of any information contained on this (M)SDS consult your supervisor, a health & safety professional, or CRC Industries.

CRC

SAFETY DATA SHEET

1. Identification

Product identifier Food Grade Anti-Seize & Lubricating Compound

Other means of identification

Product code SL35905, SL35906
Recommended use Anti-seize lubricant
Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufactured or sold by:

Company name CRC Industries, Inc. Address 885 Louis Dr.

Warminster, PA 18974 US

Telephone

General Information 215-674-4300 **Technical** 800-521-3168

Assistance

 Customer Service
 800-272-4620

 24-Hour Emergency
 800-424-9300 (US)

(CHEMTREC) 703-527-3887 (International)
Website www.crcindustries.com

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Not classified.

Environmental hazards Hazardous to the aquatic environment, Category 3

long-term hazard

OSHA defined hazards Not classified.

Label elements

Hazard symbol None.
Signal word None.

Hazard statement Harmful to aquatic life with long lasting effects.

Precautionary statement

Prevention Use with adequate ventilation. Open doors and windows or use other means to ensure a fresh air

supply during use. Observe good industrial hygiene practices. Avoid release to the environment.

Response Wash hands after handling.

Storage Store away from incompatible materials.

Disposal Dispose of contents/container in accordance with local/regional/national regulations.

Hazard(s) not otherwise

classified (HNOC)

None known.

3. Composition/information on ingredients

Mixtures

Common name and synonyms	CAS number	%
	1317-65-3	20 - 30
	68037-01-4	10 - 20
	8042-47-5	10 - 20
	14807-96-6	5 - 10
	1314-13-2	1-3
	Common name and synonyms	1317-65-3 68037-01-4 8042-47-5 14807-96-6

Chemical name	Common name and synonyms	CAS number	%
Titanium dioxide		13463-67-7	< 1

Specific chemical identity and/or percentage of composition has been withheld as a trade secret.

protect themselves.

4. First-aid measures

Inhalation	If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Call a physician if symptoms develop or persist.
Skin contact	Remove and isolate contaminated clothing and shoes. Wash off immediately with soap and plenty of water. Get medical attention if irritation develops and persists. Wash contaminated clothing before reuse.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation develops and persists.
Ingestion	Rinse mouth. Drink plenty of water. Never give anything by mouth to a victim who is unconscious or is having convulsions. Do not induce vomiting without advice from poison control center. Get medical advice/attention if you feel unwell.
Most important symptoms/effects, acute and delayed	Direct contact with eyes may cause temporary irritation.
Indication of immediate medical attention and special	Treat symptomatically.

5. Fire-fighting measures

treatment needed

General information

Suitable extinguishing media	Foam. Dry chemicals. Carbon dioxide (CO2).
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.
Specific hazards arising from the chemical	During fire, gases hazardous to health may be formed.
Special protective equipment and precautions for firefighters	Self-contained breathing apparatus and full protective clothing must be worn in case of fire.
Fire-fighting equipment/instructions	Cool containers exposed to heat with water spray and remove container, if no risk is involved.
General fire hazards	No unusual fire or explosion hazards noted.

Ensure that medical personnel are aware of the material(s) involved, and take precautions to

6. Accidental release measures

protective equipment and emergency procedures	appropriate protective equipment and clothing during clean-up. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.
Methods and materials for containment and cleaning up	Stop the flow of material, if this is without risk. Prevent product from entering drains. Following product recovery, flush area with water.
	Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.
Environmental precautions	Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.
Contract the August	

Environmental precautions	Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.
7. Handling and storage	
Precautions for safe handling	Avoid prolonged or repeated contact with skin. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. Avoid release to the environment. For product usage instructions, please see the product label.
Conditions for safe storage, including any incompatibilities	Keep away from heat and sources of ignition. Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Components	or Air Contaminants (29 CFR 1910.1 Type	Value	Form
Calcium carbonate (CAS 1317-65-3)	PEL	5 mg/m3	Respirable fraction.
,		15 mg/m3	Total dust.
Titanium dioxide (CAS 13463-67-7)	PEL	15 mg/m3	Total dust.
White mineral oil (CAS 8042-47-5)	PEL	5 mg/m3	Mist.
Zinc oxide (CAS 1314-13-2)	PEL	5 mg/m3	Respirable fraction.
		5 mg/m3	Fume.
		15 mg/m3	Total dust.
US. OSHA Table Z-3 (29 CFR		20.20	200
Components	Type	Value	Form
Talc (not containing asbestos fibers) (CAS 14807-96-6)	TWA	0.3 mg/m3	Total dust.
		0.1 mg/m3	Respirable.
		20 mppcf	
		2.4 mppcf	Respirable.
US. ACGIH Threshold Limit V	/alues		
Components	Туре	Value	Form
Talc (not containing asbestos fibers) (CAS 14807-96-6)	TWA	2 mg/m3	Respirable fraction.
Titanium dioxide (CAS 13463-67-7)	TWA	10 mg/m3	
White mineral oil (CAS 8042-47-5)	TWA	5 mg/m3	Inhalable fraction.
Zinc oxide (CAS 1314-13-2)	STEL	10 mg/m3	Respirable fraction.
	TWA	2 mg/m3	Respirable fraction.
US. NIOSH: Pocket Guide to	Chemical Hazards		
Components	Туре	Value	Form
Calcium carbonate (CAS 1317-65-3)	TWA	5 mg/m3	Respirable.
		10 mg/m3	Total
Talc (not containing asbestos fibers) (CAS 14807-96-6)	TWA	2 mg/m3	Respirable.
White mineral oil (CAS 8042-47-5)	STEL	10 mg/m3	Mist.
	TWA	5 mg/m3	Mist.
Zinc oxide (CAS 1314-13-2)	Ceiling	15 mg/m3	Dust.
	STEL	10 mg/m3	Fume.
	TWA	5 mg/m3	Dust.
		5 mg/m3	Fume.
logical limit values	No biological exposure limits noted for	or the ingredient(s).	
oosure guidelines	Occupational Exposure Limits are no	t relevant to the current physic	al form of the product.
propriate engineering ntrols	Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.		
ividual protection measures, s Eye/face protection	such as personal protective equipm Wear safety glasses with side shields		
	Per in Editing of Africa's Links Male Milesai.	11.5/12/15	
Skin protection	Wear protective gloves such as: Nitri		

Other Wear suitable protective clothing.

If engineering controls are not feasible or if exposure exceeds the applicable exposure limits, use a Respiratory protection

> NIOSH-approved cartridge respirator with an organic vapor cartridge. Use a self-contained breathing apparatus in confined spaces and for emergencies. Air monitoring is needed to

determine actual employee exposure levels.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective

equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid.

Form Semi-solid paste.

Color White. Petroleum. Odor Not available. Odor threshold Neutral.

Melting point/freezing point > 449.6 °F (> 232 °C) Initial boiling point and boiling > 500 °F (> 260 °C)

range

> 449.6 °F (> 232 °C) Cleveland Open Cup Flash point

Evaporation rate Slow.

Flammability (solid, gas) Not available. Upper/lower flammability or explosive limits

Flammability limit - lower

Not available.

(%)

Flammability limit - upper

Not available.

(%)

< 0.01 kPa Vapor pressure Vapor density > 5 (air = 1)Relative density 1.18 Solubility (water) Negligible. Partition coefficient Not available.

(n-octanol/water)

> 500 °F (> 260 °C) Auto-ignition temperature Not available. Decomposition temperature Not available. Viscosity (kinematic) Percent volatile 41 % estimated

10. Stability and reactivity

Reactivity The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous

reactions

No dangerous reaction known under conditions of normal use.

Contact with incompatible materials. Conditions to avoid

Acids. Strong oxidizing agents. Fluorine. Incompatible materials Hazardous decomposition

products

Carbon oxides. Hydrocarbon fumes and smoke. Halogenated materials. Heavy metal compounds.

11. Toxicological information

Information on likely routes of exposure

Inhalation Prolonged inhalation may be harmful.

Skin contact Prolonged skin contact may cause temporary irritation. Eye contact Direct contact with eyes may cause temporary irritation.

Ingestion Expected to be a low ingestion hazard.

Symptoms related to the physical, chemical and toxicological characteristics

Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity

Product Species Test Results

Food Grade Anti-Seize & Lubricating Compound

Acute Dermal

LD50 Rabbit 8771 mg/kg estimated

Inhalation

LC50 Rat 37 mg/l estimated

Oral

LD50 Rat 2385 mg/kg Acute Toxicity Estimate

Chronic

Oral

LD50 Rat 36603 mg/kg estimated

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation.

Serious eye damage/eye Direct contact with eyes may cause temporary irritation.

irritation

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity

No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Not likely, due to the form of the product.

IARC Monographs. Overall Evaluation of Carcinogenicity

White mineral oil (CAS 8042-47-5) 3 Not classifiable as to carcinogenicity to humans.

US. National Toxicology Program (NTP) Report on Carcinogens

Not available.

Reproductive toxicity

This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Not classified.

Aspiration hazard Not an aspiration hazard.

Chronic effects Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Harmful to aquatic life with long lasting effects.

Product Species Test Results

Food Grade Anti-Seize & Lubricating Compound

Aquatic

Acute

Crustacea EC50 Daphnia 6.5275 mg/l, 48 hours estimated Fish LC50 Fish 73.3333 ppm, 96 hours estimated

Test Results Components **Species** Talc (not containing asbestos fibers) (CAS 14807-96-6) Aquatic Acute Fish LC50 Zebra danio (Danio rerio) > 100 g/l, 96 hours Titanium dioxide (CAS 13463-67-7) Acute Other EC50 Pseudokirchnerella subcapitata 5.83 mg/l, 72 hours Chronic Other NOEC Pseudokirchnerella subcapitata 0.984 mg/l, 72 hours Aquatic Acute Crustacea LC50 Ceriodaphnia dubia 3 mg/l, 48 hours Water flea (Daphnia magna) 5.5 ppm, 48 hours LC50 Fish Fathead minnow (Pimephales promelas) 1000 mg/l, 96 hours

Zinc oxide (CAS 1314-13-2)

Aquatic

Acute

Crustacea EC50 Fish

LC50

Water flea (Daphnia magna) Rainbow trout, donaldson trout

(Oncorhynchus mykiss)

1.1 ppm, 96 hours

0.098 mg/l, 48 hours

Persistence and degradability

No data is available on the degradability of this product.

Bioaccumulative potential

Bioconcentration factor (BCF)

Titanium dioxide 352

Mobility in soil No data available.

No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation Other adverse effects

potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal of waste from residues / unused products

This product is not a RCRA hazardous waste (See 40 CFR Part 261.20 - 261.33). Empty containers may be recycled. Collect and reclaim or dispose in sealed containers at licensed waste

disposal site. Dispose in accordance with all applicable regulations.

Hazardous waste code

Not regulated.

Contaminated packaging

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is

emptied.

14. Transport information

DOT

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

^{*} Estimates for product may be based on additional component data not shown.

SARA 304 Emergency release notification

Not regulated.

US EPCRA (SARA Title III) Section 313 - Toxic Chemical: Listed substance

Zinc oxide (CAS 1314-13-2)

CERCLA Hazardous Substance List (40 CFR 302.4)

Zinc oxide (CAS 1314-13-2) Listed.

CERCLA Hazardous Substances: Reportable quantity

Not listed.

Spills or releases resulting in the loss of any ingredient at or above its RQ require immediate notification to the National Response Center (800-424-8802) and to your Local Emergency Planning Committee.

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Reactivity Hazard - No

Not regulated.

Safe Drinking Water Act

Not regulated.

(SDWA)

Food and Drug

Not regulated.

Administration (FDA)

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Immediate Hazard - No Section 311/312 Delayed Hazard - No Hazard categories Fire Hazard - No Pressure Hazard - No

SARA 302 Extremely No

hazardous substance US state regulations

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd.

(a))

Talc (not containing asbestos fibers) (CAS 14807-96-6)

Titanium dioxide (CAS 13463-67-7)

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. New Jersey Worker and Community Right-to-Know Act

Calcium carbonate (CAS 1317-65-3)

Talc (not containing asbestos fibers) (CAS 14807-96-6)

Zinc oxide (CAS 1314-13-2)

White mineral oil (CAS 8042-47-5)

US. Massachusetts RTK - Substance List

Calcium carbonate (CAS 1317-65-3)

Talc (not containing asbestos fibers) (CAS 14807-96-6)

White mineral oil (CAS 8042-47-5)

Zinc oxide (CAS 1314-13-2)

US. Pennsylvania Worker and Community Right-to-Know Law

Zinc oxide (CAS 1314-13-2) Diphenylamine (CAS 122-39-4) Calcium carbonate (CAS 1317-65-3) Polytetrafluoroethylene (CAS 9002-84-0)

Talc (not containing asbestos fibers) (CAS 14807-96-6)

White mineral oil (CAS 8042-47-5)

US. Rhode Island RTK

Zinc oxide (CAS 1314-13-2)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

Volatile organic compounds (VOC) regulations

EPA

VOC content (40 CFR

51.100(s))

Consumer products (40 CFR 59, Subpt. C) Not regulated

State

Consumer products

This product is regulated as an Anti-seize Lubricant (non-aerosol). This product is compliant for

use in all 50 states.

0 % VOC content (CA) VOC content (OTC) 0 %

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	No
Canada	Domestic Substances List (DSL)	No
Canada	Non-Domestic Substances List (NDSL)	Yes
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	No
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	No

United States & Puerto Rico Toxic Substances Control Act (TSCA) Inventory Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s) A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

07-21-2015 Issue date Allison Cho Prepared by

Version # 01

Further information Not available. Health: 1 **HMIS®** ratings Flammability: 1

Physical hazard: 0 Personal protection: B

NFPA ratings Health: 1

> Flammability: 1 Instability: 0

NFPA ratings



Disclaimer

The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. This information is accurate to the best of CRC Industries' knowledge or obtained from sources believed by CRC to be accurate. Before using any product, read all warnings and directions on the label. For further clarification of any information contained on this (M)SDS consult your supervisor, a health & safety professional, or CRC Industries.

SAFETY DATA SHEET



A07311 ZEP PRO NF SLVT DGRS R12201 20N20

Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Material name A07311 ZEP PRO NF SLVT DGRS R12201 20N20

Material number 00000000001040807

Manufacturer or supplier's details

Zep Inc. Company

Address 1310 Seaboard Industrial Blvd., NW

Atlanta, GA 30318

404-352-1680 Telephone

Emergency telephone numbers

For SDS Information Compliance Services 1-877-428-9937

For a Medical Emergency 877-541-2016 Toll Free - All Calls Recorded For a Transportation CHEMTREC: 800-424-9300 - All Calls Recorded.

In the District of Columbia 202-483-7616 Emergency

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	Aerosol containing a compressed gas
Colour	colourless
Odour	mild

GHS Classification

: Compressed gas Gases under pressure Skin irritation : Category 2 Eye irritation : Category 2A Carcinogenicity : Category 1A

Specific target organ toxicity -: Category 3 (Central nervous system)

single exposure

GHS Label element

Hazard pictograms







Signal word Danger

Hazard statements H280 Contains gas under pressure; may explode if heated.

H315 Causes skin irritation.

H319 Causes serious eye irritation. H336 May cause drowsiness or dizziness.

H350 May cause cancer.

Precautionary statements : Prevention:

P201 Obtain special instructions before use.



Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

P202 Do not handle until all safety precautions have been read and understood.

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264 Wash skin thoroughly after handling.

P271 Use only outdoors or in a well-ventilated area.

P280 Wear eye protection/ face protection.

P280 Wear protective gloves.

P281 Use personal protective equipment as required.

Response:

P302 + P352 IF ON SKIN: Wash with plenty of soap and water. P304 + P340 + P312 IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell. P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P308 + P313 IF exposed or concerned: Get medical advice/ attention.

P332 + P313 If skin irritation occurs: Get medical advice/ attention.

P337 + P313 If eye irritation persists: Get medical advice/attention.

P362 Take off contaminated clothing and wash before reuse.

Storage:

P405 Store locked up.

P410 + P403 Protect from sunlight. Store in a well-ventilated place.

Disposal:

P501 Dispose of contents/container in accordance with local regulation.

Potential Health Effects

Carcinogenicity:

IARC Group 1: Carcinogenic to humans

trichloroethylene 79-01-6

ACGIH Suspected human carcinogen

trichloroethylene 79-01-6

OSHA No component of this product present at levels greater than or

equal to 0.1% is identified as a carcinogen or potential

carcinogen by OSHA.

NTP Reasonably anticipated to be a human carcinogen

trichloroethylene 79-01-6

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

Chemical Name	CAS-No.	Concentration [%]
trichloroethylene	79-01-6	>= 90 - <= 100
carbon dioxide	124-38-9	>= 1 - < 5



Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

SECTION 4. FIRST AID MEASURES

General advice : Move out of dangerous area.

Show this safety data sheet to the doctor in attendance.

Do not leave the victim unattended.

If inhaled : Remove person to fresh air. If signs/symptoms continue, get

medical attention.

In case of skin contact : If skin irritation persists, call a physician.

Wash off immediately with plenty of water for at least 15

minutes

If on clothes, remove clothes.

In case of eye contact : Remove contact lenses.

Protect unharmed eye.

Keep eye wide open while rinsing.

If eye irritation persists, consult a specialist.

Rinse immediately with plenty of water for at least 15 minutes.

If swallowed : DO NOT induce vomiting unless directed to do so by a

physician or poison control center. Keep respiratory tract clear.

Never give anything by mouth to an unconscious person.

If symptoms persist, call a physician. Take victim immediately to hospital.

SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media : Dry chemical

Water spray jet

Alcohol-resistant foam Carbon dioxide (CO2)

Unsuitable extinguishing

media

: High volume water jet

Specific hazards during

firefighting

: Do not allow run-off from fire fighting to enter drains or water

courses.

Hazardous combustion

products

: Carbon dioxide (CO2)

Carbon monoxide

Smoke

Chlorine compounds

Specific extinguishing

methods

Use extinguishing measures that are appropriate to local

circumstances and the surrounding environment.

Further information : Fire residues and contaminated fire extinguishing water must

be disposed of in accordance with local regulations.

Collect contaminated fire extinguishing water separately. This

must not be discharged into drains.

Prevent fire extinguishing water from contaminating surface

water or the ground water system.

For safety reasons in case of fire, cans should be stored



Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

separately in closed containments.

Special protective equipment

for firefighters

Wear self-contained breathing apparatus for firefighting if

necessary.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.

Ensure adequate ventilation.

Refer to protective measures listed in sections 7 and 8. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Evacuate personnel to safe areas. Remove all sources of ignition.

Environmental precautions : Prevent further leakage or spillage.

Clean contaminated floors and objects thoroughly while

observing environmental regulations.

Methods and materials for containment and cleaning up

: Soak up with inert absorbent material (e.g. sand, silica gel,

acid binder, universal binder, sawdust).

SECTION 7. HANDLING AND STORAGE

Advice on safe handling : Avoid exposure - obtain special instructions before use.

Avoid contact with skin and eyes. For personal protection see section 8.

Smoking, eating and drinking should be prohibited in the

application area.

Provide sufficient air exchange and/or exhaust in work rooms.

Always replace cap after use.

Dispose of rinse water in accordance with local and national

regulations.

Do not breathe vapours or spray mist.

Take precautionary measures against static discharges.

Conditions for safe storage : BEWARE: Aerosol is pressurized. Keep away from direct sun

exposure and temperatures over 50 °C. Do not open by force or throw into fire even after use. Do not spray on flames or

red-hot objects.

Observe label precautions.

Keep in a dry, cool and well-ventilated place.

Electrical installations / working materials must comply with

the technological safety standards.

No smoking.

Materials to avoid : Oxidizing agents

Keep away from metals.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION



Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
trichloroethylene	79-01-6	TWA	10 ppm	ACGIH
		STEL	25 ppm	ACGIH
		TWA	100 ppm	OSHA Z-2
		CEIL	200 ppm	OSHA Z-2
		Peak	300 ppm	OSHA Z-2
		TWA	50 ppm 270 mg/m3	OSHA P0
		STEL	200 ppm 1,080 mg/m3	OSHA P0
carbon dioxide	124-38-9	TWA	5,000 ppm	ACGIH
		STEL	30,000 ppm	ACGIH
		TWA	5,000 ppm 9,000 mg/m3	NIOSH REL
		ST	30,000 ppm 54,000 mg/m3	NIOSH REL
		TWA	5,000 ppm 9,000 mg/m3	OSHA Z-1
		TWA	10,000 ppm 18,000 mg/m3	OSHA P0
		STEL	30,000 ppm 54,000 mg/m3	OSHA P0

Biological occupational exposure limits

Component	CAS-No.	Control parameters	Biological specimen	Sampling time	Permissible concentration	Basis
TRICHLOROETHENE	79-01-6	Trichloroace tic acid	Urine	End of shift at end of workwee k	15 mg/l	ACGIH BEI
TRICHLOROETHENE		Trichloroeth anol	In blood	End of shift at end of workwee k	0.5 mg/l	ACGIH BEI
TRICHLOROETHENE		Trichloroeth ylene	In blood	End of shift at end of workwee k		ACGIH BEI
TRICHLOROETHENE		Trichloroeth ylene	In end- exhaled air	End of shift at end of workwee k		ACGIH BEI

Personal protective equipment

Respiratory protection : Use respiratory protection unless adequate local exhaust

ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines.



Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

Hand protection

Remarks : The suitability for a specific workplace should be discussed

with the producers of the protective gloves.

Eye protection : Ensure that eyewash stations and safety showers are close to

the workstation location.
Tightly fitting safety goggles

Skin and body protection : impervious clothing

Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Hygiene measures : When using do not eat or drink.

When using do not smoke.

Wash hands before breaks and at the end of workday.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance : Aerosol containing a compressed gas

Colour : colourless

Odour : mild

Odour Threshold : no data available pH : not applicable Melting point/freezing point : no data available

Boiling point : 87.22 °C

Flash point

not applicable

Evaporation rate : < 1

Flammability (solid, gas) : The product is not flammable.

Upper explosion limit : not applicable

Lower explosion limit : not applicable

Vapour pressure : not applicable

Relative vapour density : no data available

Density : 1.46 g/cm3

Solubility(ies)

Water solubility : insoluble

Solubility in other solvents : not determined

Partition coefficient: n-

octanol/water

: no data available

Auto-ignition temperature : not determined

SAFETY DATA SHEET



A07311 ZEP PRO NF SLVT DGRS R12201 20N20

Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

Thermal decomposition : no data available

Viscosity

Viscosity, kinematic : no data available

Heat of combustion : 6.98 kJ/g

SECTION 10. STABILITY AND REACTIVITY

Reactivity : Stable

Chemical stability : Stable under normal conditions.

Possibility of hazardous

reactions

: Vapours may form explosive mixture with air.

No decomposition if stored and applied as directed.

Conditions to avoid : Heat, flames and sparks.

Extremes of temperature and direct sunlight.

Incompatible materials : Oxidizing agents

Light and/or alkaline metals

Hazardous decomposition

products

: Carbon monoxide, carbon dioxide and unburned

hydrocarbons (smoke).

Phosgene

Hydrogen chloride gas

SECTION 11. TOXICOLOGICAL INFORMATION

Acute toxicity

Product:

Acute oral toxicity : Acute toxicity estimate : > 5,000 mg/kg

Method: Calculation method

Components:

trichloroethylene:

Acute oral toxicity : LD50 Oral rat: 4,920 mg/kg

Acute inhalation toxicity : LC50 mouse: 8450 ppm

Exposure time: 4 h

Acute dermal toxicity : LD50 Dermal rabbit: > 20,000 mg/kg

Skin corrosion/irritation

Product:

SAFETY DATA SHEET



A07311 ZEP PRO NF SLVT DGRS R12201 20N20

Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

Remarks: May cause skin irritation in susceptible persons.

Serious eye damage/eye irritation

Product:

Remarks: Eye irritation

Respiratory or skin sensitisation

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

no data available

Reproductive toxicity

no data available

trichloroethylene: carbon dioxide:

STOT - single exposure

no data available

STOT - repeated exposure

no data available

Aspiration toxicity

no data available

Further information

Product:

Remarks: no data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

no data available

Persistence and degradability

no data available

Bioaccumulative potential

Product:

octanol/water Components: trichloroethylene:

Partition coefficient: n- : Remarks: no data available



Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

Partition coefficient: n-

octanol/water

: log Pow: 2.29

Mobility in soil

no data available

Other adverse effects

no data available

Product:

Regulation 40 CFR Protection of Environment; Part 82 Protection of

Stratospheric Ozone - CAA Section 602 Class I

Substances

Remarks This product neither contains, nor was manufactured

with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A

+ B).

Additional ecological

information

: no data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : The product should not be allowed to enter drains, water

courses or the soil.

Do not contaminate ponds, waterways or ditches with

chemical or used container.

Dispose of in accordance with local regulations.

Contaminated packaging : Empty remaining contents.

Dispose of as unused product. Do not re-use empty containers.

Do not burn, or use a cutting torch on, the empty drum.

SECTION 14. TRANSPORT INFORMATION

Transportation Regulation: 49 CFR (USA): ORM-D, CONSUMER COMMODITY

Transportation Regulation: IMDG (Vessel):

UN1950, AEROSOLS, NON-FLAMMABLE, 2.2, - Limited quantity

Transportation Regulation: IATA (Cargo Air):

UN1950, AEROSOLS, NON-FLAMMABLE, 2.2, - Limited quantity

Transportation Regulation: IATA (Passenger Air):

UN1950, AEROSOLS, NON-FLAMMABLE, 2.2, - Limited quantity



Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

Transportation Regulation: TDG (Canada):

UN1950, AEROSOLS, NON-FLAMMABLE, 2.2, - Limited quantity

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

Components	CAS-No.	Component RQ	Calculated product RQ
		(lbs)	(lbs)
trichloroethylene	79-01-6	100	103

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Acute Health Hazard

Chronic Health Hazard

Sudden Release of Pressure Hazard

SARA 302 : SARA 302: No chemicals in this material are subject to the

reporting requirements of SARA Title III, Section 302.

SARA 313 : The following components are subject to reporting levels

established by SARA Title III, Section 313:

trichloroethylene 79-01-6 96.83 %

California Prop 65 WARNING! This product contains a chemical known to the

State of California to cause cancer.

trichloroethylene 79-01-6

The components of this product are reported in the following inventories:

TSCA On TSCA Inventory

DSL This product contains one or several components that are not on the

Canadian DSL nor NDSL.

AICS
Not in compliance with the inventory
NZIoC
Not in compliance with the inventory
PICCS
Not in compliance with the inventory
IECSC
Not in compliance with the inventory

Inventory Acronym and Validity Area Legend:

AICS (Australia), DSL (Canada), IECSC (China), REACH (European Union), ENCS (Japan), ISHL (Japan), KECI (Korea), NZIOC (New Zealand), PICCS (Philippines), TSCA (USA)


SECTION 16. OTHER INFORMATION



Version 2.1 Revision Date 03/13/2015 Print Date 03/02/2016

Further information

NFPA:



Special hazard.

HMIS III:

HEALTH	2
FLAMMABILITY	0
PHYSICAL HAZARD	2

0 = not significant, 1 = Slight,

2 = Moderate, 3 = High 4 = Extreme, * = Chronic

OSHA GHS Label Information:

Hazard pictograms







Signal word Hazard statements Danger:

Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. May cause cancer.

Precautionary statements

Prevention: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Avoid breathing dust/ fume/ gas/ mist/ vapours/spray. Wash skin thoroughly after handling. Use only outdoors or in a wellventilated area. Wear eye protection/face protection. Wear protective gloves. Use personal protective equipment as required.

Response: IF ON SKIN: Wash with plenty of soap and water. IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. IF exposed or concerned: Get medical advice/ attention. If skin irritation occurs: Get medical advice/ attention. If eye irritation persists: Get medical advice/ attention. Take off contaminated clothing and wash before reuse.

Storage: Store locked up. Protect from sunlight. Store in a well-ventilated place. **Disposal:** Dispose of contents/container in accordance with local regulation.

We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. Users should make their own investigations to determine the suitability and applicability of the information for their particular purposes. This SDS has been prepared by the Compliance Services organization supporting this manufacturer, supplier or distributor.

Zep Inc. markets products under well recognized and established brand names such as Zep®. Zep Commercial®,Zep Professional®, Enforcer®, National Chemical™, Selig™, Misty®, Next Dimension™, Petro®, i-Chem®, TimeMist®, TimeWick™, MicrobeMax®, Country Vet®, Konk®, Original Bike Spirits®, Blue Coral®, Black Magic®, Rain-X®, Niagara National™, FC Forward Chemicals®,Rexodan®, Mykal™, and a number of private labeled brands.

ZEP MANUFACTURING COMPANY

07/19/01

PAGE 1

ISSUE DATE: 02/14/00 AEROSOLVE II AEROSOL SUPERSEDES: 04/21/00 PRODUCT NUMBER: 0181

Aerosol Solvent Degreaser

SECTION I - E M E R G E N C Y C O N T A C T S

MEDICAL EMERGENCY: TOLL FREE 1-877-541-2016 ALL CALLS RECORDED

TRANSPORTATION EMERGENCY: CHEMTREC: TOLL FREE 1-800-424-9300 ALL CALLS RECORDED

SECTION II - H A Z A R D O U S I N G R E D I E N T S

TLV EFFECTS % IN

DESIGNATIONS DESIGNATIONS (PPM) (SEE REVERSE) PROD. @** TRICHLOROETHYLENE ** acetylene trichloride; 50 CAR CNS IRR > 90

1-chloro-2,2-dichloroethylene; CAS# 79-01-6; RTECS# KX4550000

@ IDENTIFIES CHEMICALS LISTED UNDER SARA-SECTION 313 FOR RELEASE REPORTING.

SECTION III - HEALTH HAZARD DATA

SPECIAL NOTE: MSDS data pertains to the product as dispensed from the container. Adverse health effects would not be expected under recommended conditions of use (diluted) so long as prescribed safety precautions are practiced.

ACUTE EFFECTS OF OVEREXPOSURE:

Inhalation of vapor can produce central nervous system depression, characterized by dizziness, headache, nausea, cardiac and/or respiratory depression, and stupor. In extreme cases unconsciousness or death could result in poorly ventilated or confined spaces. Exposure to high concentrations of vapor can be irritating to mucous membranes, such as eyes and upper respiratory tract. Severe eye exposure to liquid can cause reversible eye damage. Skin contact may cause a burning sensation and reddening of the skin. Introduction of solvent to the lungs, as in aspiration of vomitus fluids, may cause chemical pneumonia. Exposure to this product may aggravate existing respiratory or cardiac conditions. Inhalation of aerosol mist may produce chemical pneumonia.

CHRONIC EFFECTS OF OVEREXPOSURE:

Repeated or prolonged contact by inhalation or skin absorption may produce liver or kidney damage or damage to the central nervous system, characterized by tingling or numbness in the extremities, blurred vision or confusion. Skin, which is defatted by repeated exposure to solvents, is more susceptible to irritation, infection, and dermatitis.

Trichloroethylene has been listed as a liver carcinogen. The results were observed when trichloroethylene was given crally to mice, but were not observed in rats or hamsters. Human relevance is questionable since the metabolic mechanism in mice does not apply in humans.

EST'D PEL/TLV: Not established PRIMARY ROUTES OF ENTRY: Inh, Skin.

HMIS CODES: HEALTH 2; FLAM. 0; REACT. 0; PERS. PROTECT. B ; CHRONIC HAZ. YES

PAGE 2

ISSUE DATE: 02/14/00 AEROSOLVE II AEROSOL SUPERSEDES: 04/21/00 PRODUCT NUMBER: 0181

Aerosol Solvent Degreaser

SECTION III - H E A L T H H A Z A R D D A T A (CONTINUED)

FIRST AID PROCEDURES:

SKIN : Wash contaminated skin thoroughly with soap or a mild detergent. Apply a

skin cream with lanolin. Get medical attention if irritation persists.

EYES : Immediately flush eyes with plenty of water for at least 15 minutes, oc-

casionally lifting upper and lower lids. Get medical attention at once. INHALE: Move exposed person to fresh air at once. If breathing has stopped, per-

form artificial respiration. Get medical attention immediately.

INGEST; This route of exposure-is not likely due to product nature.

SECTION IV - S P E C I A L P R O T E C T I O N I N F O R M A T I O N

PROTECTIVE CLOTHING : Wear viton gloves or use gloves with demonstrated

resistance to the ingredients in this product.

EYE PROTECTION : Use tight-fitting safety glasses. Contact lenses should

not be worn when working with this material.

RESPIRATORY PROTECTION: When exposure levels exceed the PEL/TLV, use a self-

contained or supplied air respirator.

VENTILATION : Provide local exhaust/ventilation as needed to keep con-

centration of vapors below exposure limits (PEL/TLV).

SECTION V - P H Y S I C A L D A T A (FOR FILL MATERIAL ONLY)

BOILING POINT (F): 189

VAPOR PRESSURE (MMHG): ~60

VAPOR DENSITY (AIR=1): N/D

SOLUBILITY IN WATER: NEGLIGIBLE

SPECIFIC GRAVITY

: 1.455

EVAPORATION RATE (ETHER

=1): 3.1

: N/A

PH (CONCENTRATE)

: N/A

): N/A

VOC CONTENT (CONCENTRATE) 96.9%

APPEARANCE AND ODOR :A CLEAR, COLORLESS LIQUID WITH A MILD SOLVENT ODOR.

SECTION VI - FIRE AND EXPLOSION DATA

FLASH POINT(F) (METHOD USED): NOT FLAMMABLE (CSMA)

FLAMMABLE LIMITS LEL 8.0 UEL 10.5

EXTINGUISHING MEDIA : Carbon dioxide, dry chemical, and water fog.

SPECIAL FIRE FIGHTING: Wear self-contained positive pres. breathing apparatus.

UNUSUAL FIRE HAZARDS : None

SECTION VII - REACTIVITY DATA

STABILITY : Stable

INCOMPATIBILITY(AVOID) : Strong alkalis, oxidizers, and active metals.

POLYMERIZATION : Will not occur.

HAZARDOUS DECOMPOSITION: Carbon dioxide, carbon monoxide, hydrogen chloride, and

small amounts of phosgene & chlorine gas.

SECTION VIII - S P I L L A N D D I S P O S A L P R O C E D U R E S

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED:
Observe safety precautions in sections 4 & 9 during spill clean-up. Large
spills are unlikely due to packaging. Spill may be absorbed on an inert absorbent material, and placed in a suitable container for disposal. Wash area
thoroughly with a detergent solution and rinse well with water.

PAGE 3

ISSUE DATE: 02/14/00 AEROSOLVE II AEROSOL SUPERSEDES: 04/21/00 PRODUCT NUMBER: 0181

Aerosol Solvent Degreaser

SECTION VIII - S P I L L A N D D I S P O S A L P R O C E D U R E S (CONTINUED)

WASTE DISPOSAL METHOD:

Product is consumed in use. Do not crush, puncture or incinerate spent containers. Large numbers of aerosol containers may require handling as a hazardous waste, but in most states total hazardous waste quantities less than 220 lbs per month may allow disposal in a chemical or industrial waste landfill. Consult local, state and federal agencies for the proper disposal method in your area.

RCRA HAZ. WASTE NOS .: Unused product - U228

SECTION IX - SPECIAL PRECAUTIONS

PRECAUTIONS TO BE TAKEN WHEN HANDLING AND STORING:

Do not store at temperatures above 120F (39C) or in direct sunlight. Do not puncture or incinerate container.

Do not breathe spray mists or vapors.

Vapors are heavier than air and will accumulate at low points. Ventilation should include floor level exhausting.

Keep out of the reach of children.

Clothing or shoes which become contaminated with substance should be removed promptly and not reworn until thoroughly cleaned.

SECTION X - REGULATORY INFORMATION

DOT PROPER SHIP NAME: CONSUMER COMMODITY,

NOTE: DOT information applies to larger package sizes of affected products. For some products, DOT may require alternate names and labeling in accordance with packaging group requirements.

DOT HAZARD CLASS: ORM-D

DOT PACKING GROUP:

DOT I.D. NUMBER: N/A DOT LABEL/PLACARD: ORM-D

EPA TSCA CHEMICAL INVENTORY - ALL INGREDIENTS ARE LISTED

EPA CWA 40CFR PART 117 SUBSTANCE(RQ IN A SINGLE CONTAINER): TRICHLOROETHYLENE - 100#

Date Last Reviewed by Compliance Services : 09/26/00

NOTICE

SANFORD CORP. RI 12:05 FAX 800 457 9208 Sheet 12/04/98

MSDS No: 170-43

Page 1 of 2

Sanford Corporation

2740 Washington Blvd.

Bellwood.

IL

60104

Telephone No:

Initiated By:

1-800-323-0749

Jamie Paulin

2/26/96 Date of Last Revision:

0530 A

Medical Emergency No: 1-800-228-5635

Section 1 - Product Identification

Product Name:

Roll-On Stamp Pad Inker

Colors:

Black, Red, Green, Brown

Section 2 - Composition

Dye, water, glycerine (56-81-5), diethylene glycol (111-46-6), polyethylene glycol (25322-£8-3)

Section 3 - Physical / Chemical Characteristics

For glycerine:

Boiling Point:

Greater than 550 F at 760 mm Hg

Vapor Pressure (mm Hg):

Less than 0.1 mm Hg at 72 F

Specific Gravity:

1.2-1.3 at 22 C Complete

Solubility in Water: Appearance / Odor:

Water white, clear liquid, bland odor

Evaporation Rate:

Not available

Section 4 - Fire and Explosion Hazard Data

Flash Point (Method Used):

Greater than 390 F (PMCC)

Flammability Limits (% by volume):

Lower: Not available

Upper: Nct available

Extinguishing Medium:

N/A

Special Fire Fighting Procedures:

N/A

Unusual Fire and Explosion Haz ards.

9.

Section 5 - Reactivity Data

Stability:

Stable

Conditions to Avoid:

Not available

Chemical Incompatibility:

Not available

Hazardous Decomposition:

Not available

Hazardous Polymerization:

Will not occur

Section 6 - Health Hazard Data

Chemical Listed as Carcinogen or Potential Carcinogen;

IARC Monographs:

NO

National Toxicology Program:

No

OSHA Regulated:

No

This product is not considered taxic under Federal Hazardous Substances Act regulations, Title 16, Part 1500. The product is considered safe when used under normal use conditions.

Section 7 - Precautions for Safe Handling and Use

Steps to be Taken in Case

Material is Released or Spilled:

Wipe up with absorbent material and discard in accordance with Federal, State,

and Local Regulations.

Waste Disposal Method:

In accordance with Federal, State, and Local Regulations.

Precautions to be Taken in Handling and Storing:

Do not squeeze bottle. Keep cap on bottle when not in use.

Other Precautions:

None

Section 8 - Personal Protection and Exposure Control Measures

Eve Protection:

None under normal use conditions.

Skin Protection:

None under normal use conditions.

Respiratory Protection:

None under normal use conditions.

Ventilation:

None under normal use conditions.

Protective Clothing:

None under normal use conditions.

HMIS Code Health 0 Flammability 0 Reactivity B Personal Protection

0 = Minimal /4 = Severs Hazard

Sanford Corporation has been advised by council that the OSHA Hazard Communication Standard does not apply to the Sanford Product described in this MSDS. The reason for the exemption is contained in 29 CFR, Part 1910.1200, (b) (6) (ix), as amended July 1, 1994 per Federal Registrar. The information contained in this MSDS is forwarded to you for your information but is not meant to imply that the product is covered by the Hazard Communication Standard nor is the MSDS mount to comply with all requirements of the Hazard Communication Standard.



This MSDS covers part numbers 30004P, 30016P, 30128P, 30640P, 33840P and 37040P for

Tap Magic ProTap Cutting Fluid. Click for a printable PDF.

MATERIAL SAFETY DATA SHEET

U.S. DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION, HAZARD COMMUNICATION STANDARD, 29 CFR 1910.1200

The Steco Corporation 2330 Cantrell Road P.O. Box 2238 Little Rock, AR 72203

Emergency Response: (800) 255-3924

Information: (800) 643-8026 Fax #: (501) 374-4278

Date Reviewed: August 15, 2011

TRADE NAME: TAP MAGIC PROTAP Cutting Fluid CHEMICAL NAME & SYNONYMS: Hydrocarbon Mixture DOT SHIPPING NAME: Not a regulated material

IATA SHIPPING NAME: No hazard label required. No limit on quantity.

HMIS/NFPA CODE: Health 0; Fire 1; Reactivity 0.

MANUFACTURING CODE NO.: 8358 COMMODITY CODE NO.: 332-9150

I. HAZARDOUS INGREDIENTS

This product contains no toxic or hazardous ingredients by OSHA criteria; however, as with any chemical product, exposure to liquids, vapors, mists and fumes should be minimized.

II. INGREDIENTS

Aliphatic Organic Acid: CAS# 112-80-1 >75% mixture Aliphatic Organic Ester: CAS# 112-62-9 <15% mixture Organic Polyol: CAS# None Assigned <10% mixture

III. PHYSICAL DATA

BOILING RANGE, (760 mm Mercury): 680 to 1000° F SPECIFIC GRAVITY (Water = 1) (lbs/gal): (0.894) 7.46 lbs/gal VAPOR PRESSURE (mm of Mercury) @ 75° F: Less Than 1 VAPOR DENSITY (Air = 1): Greater Than 5

SOLUBILITY IN WATER, % by weight: Less Than 1 (Insoluble) EVAPORATION RATE (Butyl Acetate = 1): Less Than 0.01

% VOLATILE BY VOLUME @ 75° F: Less Than 1

APPEARANCE: Yellow Liquid

ODOR: Pleasant pH: Nonaqueous

IV. FIRE & EXPLOSION DATA

LOWER FLAMMABLE LIMIT IN AIR (% by Volume): 1.0 UPPER FLAMMABLE LIMIT IN AIR (% by Volume): 15

FLASH POINT, PMCC: 370° F

AUTOIGNITION TEMPERATURE: 685° F

EXTINGUISHING MEDIA: Foam, Carbon Dioxide, Dry Chemical

V. HEALTH HAZARD INFORMATION

ROUTES OF ENTRY: Ingestion is the primary method of possible entry.

EFFECTS OF ACUTE OVEREXPOSURE:

INHALATION – (Unlikely due to low vapor pressure). Mist may cause headache, nasal, respiratory and eye irritation.

INGESTION - Headache, drowsiness, nausea, fatigue.

EYE - May cause pain and irritation.

EFFECTS OF CHRONIC OVEREXPOSURE:

SKIN CONTACT – Prolonged or repeated exposure may cause irritation.

CARCINOGENICITY: Not a carcinogen or suspect carcinogen.

EMERGENCY AND FIRST AID PROCEDURES:

EYE – Flush eyes gently with water for at least 15 minutes. Supportive treatment is recommended.

SKIN – Wash with mild soap and water. Remove wetted clothing until dry.

INHALATION - Remove to fresh air.

INGESTION – Do not induce vomiting. Call a physician and/or transport to emergency medical facility.

VI. REACTIVITY DATA

Materials such as sawdust or cloth rags which have been wetted with lubricant may be subject to spontaneous combustion during storage.

VII. DISPOSAL, SPILL OR LEAK PROCEDURES

AQUATIC TOXICITY – Aquatic toxicity is low: Product is not soluble in water. Biodegradable.

SPILL OR LEAK PROCEDURES – Absorb with inert materials. Remove to out of doors and incinerate.

WASTE DISPOSAL METHOD – Tap Magic ProTap contains no environmentally hazardous substances. Small amounts may be incinerated in compli¬ance with local, state and federal regulations. The recommended method of disposal for large quantities is recycling by a reclaimer or incineration. "If inert absorbents are employed in spill containment or cleanup, these absorbents must be non-biodegradable materials if destined for landfill disposal. Suitable absorbents include natural minerals (clay), activated charcoal, man-made polymers (HD polyethylene)."

VIII. SPECIAL PROTECTION INFORMATION

EYE PROTECTION – Standard eye protection should be worn when using this product.

SKIN PROTECTION – No special protection is needed. However, good personal hygiene practices should be followed.

RESPIRATORY – If application to which this product is being applied generates excessive mist or fumes, then appropriate respiratory protective equipment should be used. No special requirements under ordinary condition and use and proper ventilation of work area.

VENTILATION – No special requirements under ordinary conditions of use and with adequate ventilation.

IX. SPECIAL PRECAUTIONS

Product is ignitable, keep away from open flames. Do not expose to ignition sources. Do not store with strong oxidizers such as nitrates or perchlorates or oxygen under pressure. May cause swelling of some plastics and synthetic rubbers.

X. ADDITIONAL INFORMATION

Tap Magic ProTap DOES NOT CONTAIN 1,1,1-trichloroethane or any ozone depleting substances. PROTAP does not contain chlorine, phosphorous, active sulfur, nitrates, nitrite derivatives, amines, polynuclear aromatic compounds either as ingredients or trace contaminants. Shelf life is indefinite at ambient temperatures and left in original containers. Tap Magic ProTap does not contain any chemical compound listed on the SARA list of 'Extremely Hazardous Chemicals', and is in compliance with all of the requirements of the TSCA at the time of shipment. Caution: Any cutting fluid can be "overworked" or "overheated", causing it to break down. This overuse is identified by the sight of or strong odor of vapors or fumes not normally present. The effects of these vapors or fumes on human health have not been fully determined. After use of this product, clean and lubricate metal surfaces to avoid staining and/or corrosion.

By: Asa L. Morton, Chief Chemist, American Interplex Corporation, Little Rock, AR 72204, (501) 224-5060

Tap Magic is a division of The Steco Corporation
P.O. Box 2238 • Little Rock, Arkansas 72203 • USA
1-800-643-8026 • Fax 501-374-4278
Contact • MSDSs • Part Numbers • Full Catalog

STECO CORP -- TAP MAGIC PROTAP CUTTING FLUID,8858,EP-XTRA,10016 E -- 9150-01-373-5788

01-373-5788 ========== Product Identification ===================== Product ID: TAP MAGIC PROTAP CUTTING FLUID, 8858, EP-XTRA, 10016 E MSDS Date: 03/31/1992 FSC:9150 NIIN:01-373-5788 MSDS Number: CCVVG === Responsible Party === Company Name: STECO CORP Address:2880 CANTRELL ROAD Box:2288 City:LITTLE ROCK State:AR ZIP:72203-2288 Country: US Info Phone Num:800-648-8026 FAX: 501-374-4278 Emergency Phone Num:501-375-5644 Preparer's Name: ASA L. MORTON CAGE:17781 === Contractor Identification === Company Name: INDUSTRIAL SUPPLY CORP Address:1905 WESTWOOD AVE Box:6356 City: RICHMOND State: VA ZIP:23230 Country: US Phone: 804-355-8041 CAGE: 6A908 Company Name: STECO CORP Address:2330 CANTRELL ROAD Box:2238 City:LITTLE ROCK State:AR ZIP:72203 Country: US Phone: 800-643-8026 CAGE:17781 ======= Composition/Information on Ingredients ======== Ingred Name: OLEIC ACID/ALIPHATIC ORGANIC ACID CAS:112-80-1 RTECS #:RG2275000 Fraction by Wt: >75% Other REC Limits: NONE RECOMMENDED Ingred Name: OLEIC ACID, METHYL ESTER, CIS-/EMEREST (2301/2801)/ALIPHATIC ORGANIC ESTER CAS:112-62-9 RTECS #:RK0895000 Fraction by Wt: <15%

Other REC Limits: NONE RECOMMENDED

OSHA PEL:15 MG/M3 TDUST

ACGIH TLV:10 MG/M3 TDUST; 9596

Ingred Name:ORGANIC POLYOLS

Fraction by Wt: <10%

Other REC Limits: NONE RECOMMENDED

========== Hazards Identification ===========================

LD50 LC50 Mixture:TLV FOR OIL MIST IS 5 MG/M3.

Routes of Entry: Inhalation: NO Skin: NO Ingestion: NO

Reports of Carcinogenicity:NTP:NO IARC:NO OSHA:NO

Health Hazards Acute and Chronic:TARGET ORGANS:EYES, SKIN, RESPIRATORY AND GI TRACTS. ACUTE- EYES:MAY CAUSE PAIN AND IRRITATION.

SKIN:PROLONGED OR REPEATED CONTACT MAY CAUSE IRRITATION.

INHALE:MISTS MAY IRRITATE EYES AND RESPIRATORY TRACT. ORAL:MAY CAUSE IRRITATION OF GASTROINTESTINAL TRACT, HEADACHE, DROWSINESS, FATIGUE. CHRONIC- UNKNOWN.

Explanation of Carcinogenicity: NONE

Effects of Overexposure: IRRITATION, NAUSEA, VOMITING, HEADACHE, DROWSINESS, FATIGUE, PAIN, TEARING

Medical Cond Aggravated by Exposure:INDIVIDUALS WITH PRE-EXISTING SKIN DISORDERS MAY BE MORE SUCCEPTIBLE TO THE EFFECTS FROM EXPOSURE TO THIS PRODUCT.

========= First Aid Measures ===============

First Aid:GET MEDICAL ATTENTION IF SYMPTOMS PERSIST. INHALATION:REMOVE TO FRESH AIR. PROVIDE CPR/OXYGEN IF NEEDED. EYE:FLUSH WITH WATER FOR 15 MINUTES, HOLDING EYELIDS OPEN. SKIN:WASH WITH SOAP AND WATER. INGES TION:DO NOT INDUCE VOMITING. GET IMMEDIATE MEDICAL HELP.

Flash Point Method:PMCC Flash Point:370F,188C

Autoignition Temp: Autoignition Temp Text: 685F

Lower Limits:1.0
Upper Limits:15

Extinguishing Media: USE CARBON DIOXIDE, SAND, FOAM/DRY CHEMICAL. WATER SPRAY MAY BE USED TO KEEP FIRE EXPOSED CONTAINERS COOL.

Fire Fighting Procedures: WEAR PROTECTIVE CLOTHING AND NIOSH-APPROVED SELF-CONTAINED BREATHING APPARATUS.

Unusual Fire/Explosion Hazard:NONE

======== Accidental Release Measures ==========

Spill Release Procedures: ABSORB SPILL WITH INERT MATERIAL SUCH AS SAND OR VERMICULITE. PLACE IN PROPER CONTAINERS FOR DISPOSAL. DO NOT ALLOW SPILL TO ENTER DRAINS, SEWERS OR WATERWAYS.

Neutralizing Agent:NOT RELEVANT

============= Handling and Storage =================

Handling and Storage Precautions:STORE IN A COOL, DRY PLACE, AWAY FROM INCOMPATIBLE MATERIALS. KEEP CONTAINER TIGHTLY CLOSED. KEEP OUT OF REACH OF CHILDREN.

Other Precautions:DO NOT GET IN EYES, ON SKIN OR ON CLOTHING. WASH THOROUGHLY AFTER HANDLING. AVOID BREATHING OIL MIST. DISCARD LUBRICANT-SOAKED SHOES. REMOVE LUBRICANT-SOAKED CLOTHING AND LAUNDER BEFORE RE-USE.

====== Exposure Controls/Personal Protection ========

Respiratory Protection:NO SPECIAL REQUIREMENTS UNDER ORDINARY CONDITIONS OF USE AND WITH ADEQUATE VENTILATION. IF EXCESSIVE MISTING (>5 MG/M3), USE NIOSH APPROVED ORGANIC VAPOR RESPIRATOR (REFER TO 29 CFR 1910.134).

Ventilation: WHEN USE CONDITIONS ARE LIKELY TO RESULT IN EXCESSIVE MISTING (>5 MG/M3), PROVIDE ADEQUATE LOCAL VENTILATION.

Protective Gloves: NEOPRENE FOR REPEATED CONTACT

Eye Protection: SAFETY GLASSES/CHEMICAL SPLASH GOGGLES

Other Protective Equipment: EYE WASH STATION & SAFETY SHOWER

Work Hygienic Practices: OBSERVE GOOD INDUSTRIAL HYGIENE PRACTICES AND RECOMMENDED PROCEDURES. WASH THOROUGHLY BEFORE EATING, DRINKING/SMOKING.

Supplemental Safety and Health

FORMULA CHANGED. FOR PREVIOUS FORMULATIONS, SEE PNI A, B OR C, SAME NSN.

======= Physical/Chemical Properties =========

HCC:V6

NRC/State Lic Num:NOT RELEVANT Boiling Pt:B.P. Text:680 - 1000F

Vapor Pres:<1 @ 75F Vapor Density:>5 Spec Gravity:0.894

Evaporation Rate & Reference:<0.01 (N-BUTYL ACETATE=1)</pre>

Solubility in Water:<1% (INSOLUBLE)</pre>

Appearance and Odor: YELLOW LIQUID - PLEASANT ODOR

Percent Volatiles by Volume:<1

======= Stability and Reactivity Data ==========

Stability Indicator/Materials to Avoid:YES

STRONG OXIDIZING AGENTS SUCH AS NITRATES, PERCHLORATES, PLASTICS SYNTHETIC RUBBERS

Stability Condition to Avoid: MOISTURE, EXCESSIVE HEAT, OPEN FLAMES, IGNITION SOURCES

======== Disposal Considerations ===========

Waste Disposal Methods:DISPOSE OF IN ACCORDANCE WITH ALL LOCAL, STATE AND FEDERAL REGULATIONS. RECOMMENDED METHODS: INCINERATION, RECYCLING. CONTAINS NO ENVIRONMENTALLY HAZARDOUS SUBSTANCE. BIODEGRADABLE.

Disclaimer (provided with this information by the compiling agencies): This information is formulated for use by elements of the Department of Defense. The United States of America in no manner whatsoever, expressly or implied, warrants this information to be accurate and disclaims all liability for its use. Any person utilizing this document should seek competent professional advice to verify and

assume responsibility for the suitability of this information to their particular situation.

SAFETY DATA SHEET

Barge AP (DC001, DC031, DC111, DC115)



Section 1. Identification

GHS product identifier

: Barge AP (DC001, DC031, DC111, DC115)

Other means of identification : Not available.

Product type : Liquid.

Identified uses

Adhesive.

Supplier's details : Quabaug Corporation

18 School Street

North Brookfield MA 01535

Tel: 800-325-5022 Fax: 508-867-4600

Emergency telephone number (with hours of operation) : CHEMTREC, U.S.: 1-800-424-9300 International: +1-703-527-3887

(24/7)

Section 2. Hazards identification

OSHA/HCS status

: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : FLAMMABLE LIQUIDS - Category 2

SKIN CORROSION/IRRITATION - Category 2

SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2 TOXIC TO REPRODUCTION (Unborn child) - Category 2

SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) -

Category 3

SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) - Category 2

AQUATIC HAZARD (ACUTE) - Category 1
AQUATIC HAZARD (LONG-TERM) - Category 1

GHS label elements

Hazard pictograms









Signal word

: Danger

Hazard statements

: Highly flammable liquid and vapor. Causes serious eye irritation.

Causes skin irritation.

Suspected of damaging the unborn child. May cause drowsiness and dizziness.

May cause damage to organs through prolonged or repeated exposure.

Very toxic to aquatic life with long lasting effects.

Precautionary statements



Section 2. Hazards identification

Prevention

: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Wear protective gloves. Wear eye or face protection. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Use explosion-proof electrical, ventilating, lighting and all material-handling equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Keep container tightly closed. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Do not breathe vapor. Wash hands thoroughly after handling.

Response

: Collect spillage. Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

Storage

: Store locked up. Store in a well-ventilated place. Keep cool.

Disposal

: Dispose of contents and container in accordance with all local, regional, national and

international regulations.

Hazards not otherwise

classified

: None known.

Section 3. Composition/information on ingredients

Substance/mixture

: Mixture

Other means of identification : Not available.

CAS number/other identifiers

CAS number : Not applicable.

Product code : Not available.

Ingredient name	%	CAS number	
Toluene	35 - 60	108-88-3	
Heptane	15 - 25	142-82-5	
Ethyl acetate	5 - 15	141-78-6	

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact

: Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 20 minutes. Get medical attention.

Inhalation

: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open



Section 4. First aid measures

airway.

Skin contact: Flush contaminated skin with plenty of water. Continue to rinse for at least 20 minutes.

Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before

reuse.

Ingestion : Wash out mouth with water. Remove victim to fresh air and keep at rest in a position

comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. If necessary, call a poison center or physician. Never give anything by mouth to an unconscious person. If unconscious,

place in recovery position and get medical attention immediately.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : Causes serious eye irritation.

Inhalation ; Can cause central nervous system (CNS) depression. May cause drowsiness and

dizziness.

Skin contact : Causes skin irritation.

Ingestion : Can cause central nervous system (CNS) depression. Irritating to mouth, throat and

stomach.

Over-exposure signs/symptoms

Eye contact : Adverse symptoms may include the following:

pain or irritation watering redness

Inhalation : Adverse symptoms may include the following:

nausea or vomiting

headache

drowsiness/fatigue dizziness/vertigo unconsciousness reduced fetal weight increase in fetal deaths skeletal malformations

Skin contact : Adverse symptoms may include the following:

irritation redness

reduced fetal weight increase in fetal deaths skeletal malformations

Ingestion : Adverse symptoms may include the following:

reduced fetal weight increase in fetal deaths skeletal malformations

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician : Treat symptomatically. Contact poison treatment specialist immediately if large

quantities have been ingested or inhaled.

Specific treatments : No specific treatment.



Section 4. First aid measures

Protection of first-aiders

: No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media

: Use dry chemical, CO₂, water spray (fog) or foam.

Unsuitable extinguishing media

: Do not use water jet or water-based fire extinguishers.

Specific hazards arising from the chemical

: Highly flammable liquid and vapor. The vapor/gas is heavier than air and will spread along the ground. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. This material is very toxic to aquatic life with long lasting effects. Fire water contaminated with this material must be contained and prevented from being discharged to any waterway, sewer or drain.

Hazardous thermal decomposition products

: Decomposition products may include the following materials: carbon dioxide

Special protective actions for fire-fighters

carbon monoxide

Special protective equipment for fire-fighters

: Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

: Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel

: No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders:

If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions

: Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air). Water polluting material. May be harmful to the environment if released in large quantities. Collect spillage.

Methods and materials for containment and cleaning up



Section 6. Accidental release measures

Spill

: Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures

Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Avoid exposure during pregnancy. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. Avoid release to the environment. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Take precautionary measures against electrostatic discharges. Empty containers retain product residue and can be hazardous. Do not reuse container.

Advice on general occupational hygiene

: Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, : including any incompatibilities

Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Toluene	NIOSH REL (United States, 10/2013). STEL: 560 mg/m³ 15 minutes. STEL: 150 ppm 15 minutes.
	TWA: 375 mg/m³ 10 hours. TWA: 100 ppm 10 hours. OSHA PEL Z2 (United States, 2/2013).
	AMP: 500 ppm 10 minutes. CEIL: 300 ppm TWA: 200 ppm 8 hours.
Heptane	ACGIH TLV (United States, 4/2014). TWA: 20 ppm 8 hours. ACGIH TLV (United States, 4/2014).
	STEL: 2050 mg/m³ 15 minutes. STEL: 500 ppm 15 minutes. TWA: 1640 mg/m³ 8 hours.



Section 8. Exposure controls/personal protection

TWA: 400 ppm 8 hours. NIOSH REL (United States, 10/2013). CEIL: 440 ppm 15 minutes. TWA: 350 mg/m3 10 hours. TWA: 85 ppm 10 hours. CEIL: 1800 mg/m3 15 minutes. OSHA PEL (United States, 2/2013). TWA: 2000 mg/m3 8 hours. TWA: 500 ppm 8 hours. Ethyl acetate ACGIH TLV (United States, 4/2014). TWA: 1440 mg/m3 8 hours. TWA: 400 ppm 8 hours. NIOSH REL (United States, 10/2013). TWA: 1400 mg/m3 10 hours. TWA: 400 ppm 10 hours. OSHA PEL (United States, 2/2013). TWA: 1400 mg/m3 8 hours. TWA: 400 ppm 8 hours. OSHA PEL 1989 (United States, 3/1989). TWA: 400 ppm 8 hours. TWA: 1400 mg/m3 8 hours.

Appropriate engineering controls

: Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation.

Individual protection measures

Hygiene measures

: Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period.

Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection

: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear antistatic protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.

Other skin protection

: Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.



Section 8. Exposure controls/personal protection

Respiratory protection

: Use a properly fitted, air-purifying or supplied air respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

Physical state : Liquid.
Color : Yellow.
Odor : Solvent.

Odor threshold : Not available.

pH : Not available.

Melting point : Not available.

Boiling point : 77.78°C (172°F)

Flash point : Closed cup: -6.11°C (21°F) [Tagliabue.]

Evaporation rate : >1 (Butyl acetate = 1)

Flammability (solid, gas) : Not available.

Lower and upper explosive (flammable) limits : Lower: 1% Upper: 11.6%

Vapor pressure : Not available.

Vapor density : >1 [Air = 1]

Relative density : 0.881

Solubility : Insoluble in water.

Partition coefficient: n-

octanol/water

: Not available.

Auto-ignition temperature : Not available.

Decomposition temperature : Not available.

: Dynamic (room temperature): 4500 mPa·s (4500 cP)

Kinematic (40°C (104°F)): 51.08 cm²/s (5108 cSt)

Volatility : 75.3647% (w/w)

Section 10. Stability and reactivity

Reactivity: No specific test data related to reactivity available for this product or its ingredients.

Chemical stability : The product is stable.

Possibility of hazardous

reactions

: Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid : Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld,

braze, solder, drill, grind or expose containers to heat or sources of ignition. Do not

allow vapor to accumulate in low or confined areas.

Incompatible materials : Reactive or incompatible with the following materials: oxidizing materials, acids and

alkalis.



Section 10. Stability and reactivity

Hazardous decomposition products

: Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Toluene	LC50 Inhalation Vapor	Rat	49 g/m³	4 hours
	LD50 Oral	Rat	636 mg/kg	-
Heptane	LC50 Inhalation Gas.	Rat	48000 ppm	4 hours
	LC50 Inhalation Vapor	Rat	103 g/m ³	4 hours
Ethyl acetate	LD50 Oral	Rat	5620 mg/kg	-

Irritation/Corrosion

Product/ingredient name	Result	Species	Score	Exposure	Observation
Toluene	Eyes - Mild irritant	Rabbit	*	0.5 minutes 100 mg	-
	Skin - Moderate irritant	Rabbit	-	24 hours 20 mg	2
	Eyes - Mild irritant	Rabbit	(5)	870 µg	2
	Eyes - Severe irritant	Rabbit	1	24 hours 2 mg	12
	Skin - Mild irritant	Pig	-	24 hours 250 µL	12.
	Skin - Mild irritant	Rabbit	(-1	435 mg	2
	Skin - Moderate irritant	Rabbit		500 mg	-

Sensitization

There is no data available.

Carcinogenicity

Classification

Product/ingredient name	OSHA	IARC	NTP	ACGIH	EPA	NIOSH
Toluene	н	3	P. Communication of the Commun	A4	-	-

Specific target organ toxicity (single exposure)

Name	Category	Route of exposure	Target organs
Toluene	Category 3	Not applicable.	Narcotic effects
Heptane	Category 3	Not applicable.	Narcotic effects
Ethyl acetate	Category 3	Not applicable.	Narcotic effects

Specific target organ toxicity (repeated exposure)

Name	Category	Route of exposure	Target organs
Toluene	Category 2	Not determined	Not determined

Aspiration hazard

Name	Result
Toluene Heptane	ASPIRATION HAZARD - Category 1 ASPIRATION HAZARD - Category 1

Information on the likely routes of exposure

: Routes of entry anticipated: Oral, Dermal, Inhalation.

Potential acute health effects

Eye contact : Causes serious eye irritation.



Section 11. Toxicological information

Inhalation : Can cause central nervous system (CNS) depression. May cause drowsiness and

dizziness.

Skin contact : Causes skin irritation.

: Can cause central nervous system (CNS) depression. Irritating to mouth, throat and

stomach.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact: Adverse symptoms may include the following:

pain or irritation

watering redness

Inhalation : Adverse symptoms may include the following:

nausea or vomiting

headache

drowsiness/fatigue dizziness/vertigo unconsciousness reduced fetal weight increase in fetal deaths skeletal malformations

Skin contact : Adverse symptoms may include the following:

irritation redness

reduced fetal weight increase in fetal deaths skeletal malformations

Ingestion : Adverse symptoms may include the following:

reduced fetal weight increase in fetal deaths skeletal malformations

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate

effects

: No known significant effects or critical hazards.

Potential delayed effects

: No known significant effects or critical hazards.

Long term exposure

Potential immediate

: No known significant effects or critical hazards.

effects

Potential delayed effects : No known significant effects or critical hazards.

Potential chronic health effects

General : May cause damage to organs through prolonged or repeated exposure.

Carcinogenicity: No known significant effects or critical hazards.

Mutagenicity: No known significant effects or critical hazards.

Teratogenicity: Suspected of damaging the unborn child.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates



Section 11. Toxicological information

There is no data available.

Section 12. Ecological information

Toxicity

Product/ingredient name	Result	Species	Exposure
Toluene	Acute EC50 433 ppm Marine water	Algae - Skeletonema costatum	96 hours
	Acute EC50 12500 µg/L Fresh water	Algae - Pseudokirchneriella subcapitata	72 hours
	Acute EC50 11600 µg/L Fresh water	Crustaceans - Gammarus pseudolimnaeus - Adult	48 hours
	Acute EC50 6000 µg/L Fresh water	Daphnia - Daphnia magna - Juvenile (Fledgling, Hatchling, Weanling)	48 hours
	Acute LC50 5500 µg/L Fresh water	Fish - Oncorhynchus kisutch - Fry	96 hours
	Chronic NOEC 500000 µg/L Fresh water	Algae - Pseudokirchneriella subcapitata	96 hours
	Chronic NOEC 1000 µg/L Fresh water	Daphnia - Daphnia magna	21 days
leptane	Acute LC50 375000 µg/L Fresh water	Fish - Oreochromis mossambicus	96 hours
Ethyl acetate	Acute EC50 2500000 µg/L Fresh water	Algae - Selenastrum sp.	96 hours
20.3	Acute LC50 750000 µg/L Fresh water	Crustaceans - Gammarus pulex	48 hours
	Acute LC50 154000 µg/L Fresh water	Daphnia - Daphnia cucullata	48 hours
	Acute LC50 425300 µg/L Fresh water	Fish - Oncorhynchus mykiss - Juvenile (Fledgling, Hatchling, Weanling)	96 hours
	Chronic NOEC 2400 µg/L Fresh water	Daphnia - Daphnia magna	21 days
	Chronic NOEC 75.6 mg/L Fresh water	Fish - Pimephales promelas - Embryo	32 days

Persistence and degradability

There is no data available.

Bioaccumulative potential

Product/ingredient name	LogPow	BCF	Potential
Toluene	2.73	90	low
Heptane Ethyl acetate	4.66 0.68	552 30	high low

Mobility in soil

Soil/water partition coefficient (Koc)

: There is no data available.

Other adverse effects

: No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods

The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling empty containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapor from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

United States - RCRA Toxic hazardous waste "U" List



Section 13. Disposal considerations

Ingredient	CAS#	Status	Reference number
Toluene	108-88-3	Listed	U220
Ethyl acetate	141-78-6	Listed	U112

Section 14. Transport information

	DOT Classification	IMDG	IATA
UN number	UN1133	UN1133	UN1133
UN proper shipping name	ADHESIVES RQ (Toluene, Ethyl Acetate)	ADHESIVES. Marine pollutant (Heptane)	ADHESIVES
Transport hazard class(es)	3	3	3
Packing group	II	П	II
Environmental hazards	No.	Yes.	No.
Additional information	Reportable quantity 1666.7 lbs / 756.67 kg [226.89 gal / 858. 87 L] Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements. Remarks SMALL QUANTITY (1 gallon or less): ORM-D; CONSUMER COMMODITY	The marine pollutant mark is not required when transported in sizes of ≤5 L or ≤5 kg. Emergency schedules (EmS) F-E, S-D	The environmentally hazardous substance mark may appear if required by other transportation regulations.

AERG : 128

DOT-RQ Details

: Toluene Ethyl acetate 1000 lbs / 454 kg [137.86 gal / 521.84 L] 5000 lbs / 2270 kg [670.36 gal / 2537.6 L]

Special precautions for user : Transport within user's premises: always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in

the event of an accident or spillage.

Transport in bulk according: Not available.

to Annex II of MARPOL 73/78 and the IBC Code

Section 15. Regulatory information

U.S. Federal regulations

: TSCA 8(a) PAIR: Heptane

TSCA 8(a) CDR Exempt/Partial exemption: Not determined

United States inventory (TSCA 8b): All components are listed or exempted.

Clean Water Act (CWA) 307: Toluene Clean Water Act (CWA) 311: Toluene



Section 15. Regulatory information

Clean Air Act Section 112 : Listed

(b) Hazardous Air Pollutants (HAPs)

Clean Air Act Section 602 : Not listed

Class I Substances

Clean Air Act Section 602 : Not listed

Class II Substances

DEA List I Chemicals

: Not listed

(Precursor Chemicals)

DEA List II Chemicals (Essential Chemicals) : Listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Fire hazard

Immediate (acute) health hazard Delayed (chronic) health hazard

Composition/information on ingredients

Name	% Fire hazar	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
Toluene	35 - 60 Yes.	No.	No.	Yes.	Yes.
Heptane	15 - 25 Yes.	No.	No.	Yes.	No.
Ethyl acetate	5 - 15 Yes.	No.	No.	Yes.	No.

SARA 313

	Product name	CAS number	%
Form R - Reporting requirements	Toluene	108-88-3	35 - 60
Supplier notification	Toluene	108-88-3	35 - 60

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : The following components are listed: Toluene; Heptane; Ethyl acetate

New York : The following components are listed: Toluene; Ethyl acetate

New Jersey : The following components are listed: Toluene; Heptane; Ethyl acetate : The following components are listed: Toluene; Heptane; Ethyl acetate

California Prop. 65

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Ingredient name	Cancer	Reproductive	No significant risk level	Maximum acceptable dosage level
Toluene	No.	Yes.	No.	7000 μg/day (ingestion) 13000 μg/day (inhalation)



Section 16. Other information

History

Date of issue mm/dd/yyyy : 10/15/2014 Date of previous issue : 11/15/2012

Version : 2

Prepared by : KMK Regulatory Services Inc.

Key to abbreviations : ATE = Acute Toxicity Estimate

BCF = Bioconcentration Factor

GHS = Globally Harmonized System of Classification and Labelling of Chemicals

IATA = International Air Transport Association

IBC = Intermediate Bulk Container

IMDG = International Maritime Dangerous Goods

LogPow = logarithm of the octanol/water partition coefficient

MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships.

1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)

UN = United Nations

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

MATERIAL SAFETY DATA SHEET

This MSDS complies with OSHA'S Hazard Communication Standard 29 CFR 1910.1200 and OSHA Form 174

	IDENTITY A	ND MANUFAC	CTURER'S INFOR	RMATION			A 100 1 10 10 10		
NFPA Rating: Health-2;	Flammability-3; Reactivity-0; Special	ŀ	HMIS Rating: Healt	th-2; Flamn	nability-3; Rea	activity-0; Perso	onal Protection-B		
Manufactured For:		OOT Hazard Clas			commodity OR	M-D, Limited Qty			
Advance Stores Company, Inc. Address: 5008 Airport Road			Identity (trade name as used on label):						
Address:			CAR	B + CHOKE					
Data Branarad: 01/24/	Roanoke, VA 24012		MSDS NUMBER:	100726	P/N A70				
Date Prepared: 01/24/1 Information Calls: (770)42		, i			UT DACED	Revision: 14 ON INDIRECT	T TECT DATA		
	Y RESPONSE NUMBER: CHEMTREC (800	424-9300	NOTICE: A	JUDGEWE	NI BASED	ON INDIREC	I IEST DATA		
	SECTION 1 - MATE		TEICATION AND	DINFORM	ΙΔΤΙΟΝ				
COMPONENTS-CHEMIC	AL NAMES AND COMMON NAMES	TUTE IDEIT	CAS Number	SARA	OSHA PEL	ACGIH	Carcinogen		
(Hazardous Components	1% or greater; Carcinogens 0.1% or greater)			III LIST	(ppm)	TLV (ppm)	Ref. Source **		
ACETONE			67-64-1	No	1000	500	d		
HYDROTREATED LIGH	T PETROLEUM DISTILLATES		64742-47-8	No	5 mg/m3 (mist)	5 mg/m3 (mist)	d		
TOLUENE			108-88-3	Yes	200	50	d		
CARBON DIOXIDE			124-38-9	No	5000	5000	d		
						1. 12 - 1	F		
WARNING: This prod	uct contains a chemical or chemicals		e State of Califor rm.	nia to caus	se cancer, b	irth defects o	r other reproductive		
	SECTION 2 - PH								
Boiling Point: N/A			ecific Gravity (H2O=						
Vapor Pressure: PSIG (C Vapor Density (Air = 1):	2 70°F (Aerosols): max 65		oor Pressure (Non-A	Aerosols)(mn = 1):		perature): N/A			
Solubility in Water: Partia			ter Reactive: No	- 1):	N/E				
	Clear liquid with solvent odor.		C: (volatile organic c	ompound pe	r CARB & Fed	deral) = 10% by v	weight		
			XPLOSION HAZ			, , , , , , , , ,			
FLAMMABILITY as per	r USA FLAME PROJECTION TEST		tion Temperature			in Air by % in	Volume:		
	50-60 inches with flashback:	, tuto igin	N/E	% LEL		% UEL: 1			
Categorized: EXTREM	ELY FLAMMABLE								
FLASH POINT AND MET	HOD USED (non-aerosols): N/A	EXTI	NGUISHER MEDIA:	Foam, dry	chemical, carb	on dioxide, wate	r.		
	G PROCEDURES: Self-contained breathing a								
Unusual Fire & Explosion	on Hazards: Do not expose aerosols to temp				ure.				
			IVITY HAZARD						
	BLE [] UNSTABLE avoid): Acids and strong oxidizers.		RDOUS POLYMER			X J WILL NOT	OCCUR		
Hazardous Decomposition		Cond	itions to Avoid: Op	ben name, w	elding arcs, ne	eat, sparks.			
riuzuruous Decompositi		ON 5 HEAL	TH HAZARD D	ΛΤΛ					
DRIMARY ROL	JTES OF ENTRY: [X] INHALATION				ION LIE	YE [] NOT	HAZARDOUS		
ACUTE EFFECTS:	TES OF ENTRY: [A]INHALATION	I INGEST	ION [X JONIN	ADSOINT	ION []L	IL []NOT	TIAZANDOUS		
	inhalation of vapors can be harmful & m	av cause hea	dache dizziness	aenhyvia :	anasthatic of	forte & nossih	le unconsciousness		
Eye Contact: Irritation			Contact: Irritation		ariestrictic ci	rects & possible	e unconsciousness.		
	nd possibly asphyxia complication from i				nt Possible	chemical nneu	monitis if asnirated		
into lungs. Nausea.									
section 1,	(Effects due to excessive exposure to the				21.11.11.11.11		NS effects. See		
Medical Conditions G	Senerally Aggravated by Exposure: M				espiratory co	nditions.			
			AID PROCEDI	URES					
	th water for at least 15 minutes. If irritat								
	e contaminated clothing. Launder be			soap and	water. If irrita	ated, seek med	dical attention.		
	fresh air. Resuscitate if necessary. Ge			111111					
Ingestion: DO NOT IN	NDUCE VOMITING. Get immediate me								
	SECTION 6 - CC								
	on (specify type): If vapor concentration						vapor.		
Protective Gloves: Ru			Protection: Safe	ty glasses i	ecommende	d.			
	ents: Adequate ventilation to keep vap	or concentration	on below TLV.						
	hing & Equipment: None	handling for t	Dametra acceta	inated -1-11	ina				
Hygienic Work Practic	ces: Wash with soap and water before		CALLS CARL SALES AND A SALES AND A		The second second				
	SECTION 7 - PREC					Ten .			
	Material Is Spilled Or Released: Absorvent from entering drains or sewers.	orb spilled liqu	id with suitable me	edium. Inc	nerate or lar	ndfill according	to local, state or		
	ods: Aerosol cans when vented to atmo	snheric nress	ure through norms	aluse nos	no disnosa	l hazard			
	aken In Handling & Storage: Do not pu						120°F		
	or Special Hazards: KEEP OUT OF R								
ignition sources.						vo			

We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind.

** Chemical Listed as Carcinogen or Potential Carcinogen. [a] NTP [b] IARC Monograph [c] OSHA [d] Not Listed [e] Animal Data Only

THIS MSDS IS CURRENT AS OF August 8, 2014. The DATE PREPARED section is the original date assembled and remains current until a change is necessary. This is

tracked internally at the manufacturer by these date codes and therefore must remain as the originating date.

#RSC Chemical Solutions

SAFETY DATA SHEET

1. Identification

Product identifier Car Quest Carb & Choke Cleaner

Other means of identification

SDS number 1035 **Part No.** 1035

Tariff code 3814.00.2000

Recommended use Carburetor Cleaner

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company nameRSC Chemical SolutionsAddress600 Radiator Road

Indian Trail, NC 28079

United States

Telephone Customer Service: (704) 821-7643

Technical: (704) 684-1811

Website www.rscbrands.com

E-mail Not available.

Emergency phone number Emergency Telephone: (303) 623-5716

Emergency Contact: RMPDC (877-740-5015)

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1 **Health hazards** Acute toxicity, oral Category 4 Acute toxicity, inhalation Category 4 Skin corrosion/irritation Category 2 Serious eye damage/eye irritation Category 2A Carcinogenicity Category 2 Reproductive toxicity (the unborn child) Category 2 Specific target organ toxicity, repeated Category 1

exposure

Environmental hazards Hazardous to the aquatic environment, acute Category 2

hazard

Hazardous to the aquatic environment, Category 2

long-term hazard

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statementExtremely flammable aerosol. Harmful if swallowed. Causes skin irritation. Causes serious eye irritation. Harmful if inhaled. Harmful if inhaled. Suspected of causing cancer. Suspected of damaging the unborn child. Causes damage to organs through prolonged or repeated exposure.

Toxic to aquatic life. Toxic to aquatic life with long lasting effects.

Material name: Car Quest Carb & Choke Cleaner

Precautionary statement

Prevention Obtain special instructions before use. Do not handle until all safety precautions have been read

and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe gas. Do not breathe mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face

protection.

Response If swallowed: Call a poison center/doctor if you feel unwell. If on skin: Wash with plenty of water. If

inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison

center/doctor if you feel unwell. Rinse mouth. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash

before reuse. Collect spillage.

Storage Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise classified (HNOC)

None known.

Supplemental information 3% of the mixture consists of component(s) of unknown acute oral toxicity. 3% of the mixture

consists of component(s) of unknown acute inhalation toxicity. % of the mixture consists of component(s) of unknown acute inhalation toxicity. 65.74% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 65.74% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
DICHLOROMETHANE		75-09-2	60 - < 70
BENZENE, DIMETHYL		1330-20-7	10 - < 20
BENZENE, METHYL-		108-88-3	10 - < 20
Carbon Dioxide		124-38-9	1 - < 3
FTHYI BENZENE		100-41-4	1 - < 3

^{*}Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Remove victim to fresh air and keep at rest in a position comfortable for breathing. Oxygen or Inhalation

artificial respiration if needed. Call a POISON CENTER or doctor/physician if you feel unwell.

Skin contact Wash off with soap and water. Get medical attention if irritation develops and persists.

Eye contact Rinse with water. Get medical attention if irritation develops and persists.

Ingestion Rinse mouth. Get medical attention if symptoms occur.

Dizziness. Nausea. Severe eye irritation. Symptoms may include stinging, tearing, redness, Most important

swelling, and blurred vision. Skin irritation. May cause redness and pain. Prolonged exposure may symptoms/effects, acute and cause chronic effects. delayed

Indication of immediate Provide general supportive measures and treat symptomatically. Keep victim warm. Keep victim medical attention and special under observation. Symptoms may be delayed.

treatment needed

IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice **General information** (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

media

the chemical

Powder. Foam. Carbon dioxide (CO2). Suitable extinguishing media

Unsuitable extinguishing Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from

Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed.

Material name: Car Quest Carb & Choke Cleaner 1035 Version #: 02 Revision date: 05-19-2015 Issue date: 05-19-2015 Special protective equipment and precautions for firefighters

Fire fighting equipment/instructions

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles. if possible. If not, withdraw and let fire burn out.

Specific methods

Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. Use water spray to cool unopened containers. In the event of fire and/or explosion do not breather tumos.

containers. In the event of fire and/or explosion do not breathe fumes.

General fire hazards Extremely flammable aerosol.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapor. Do not breathe gas. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Keep combustibles (wood, paper, oil, etc.) away from spilled material. Isolate area until gas has dispersed. This material is classified as a water pollutant under the Clean Water Act and should be prevented from contaminating soil or from entering sewage and drainage systems which lead to waterways. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.

7. Handling and storage

Precautions for safe handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe mist or vapor. Do not breathe gas. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only outdoors or in a well-ventilated area. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 1 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Store in a well-ventilated place. Keep out of the reach of children. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Specifically Regulate Components	d Substances (29 CFR 1910.100 Type	l1-1050) Value	
DICHLOROMETHANE (CAS 75-09-2)	STEL	125 ppm	
	TWA	25 ppm	
US. OSHA Table Z-1 Limits for A	ir Contaminants (29 CFR 1910.	1000)	
Components	Type	Value	
BENZENE, DIMETHYL (CAS 1330-20-7)	PEL	435 mg/m3	
,		100 ppm	

Material name: Car Quest Carb & Choke Cleaner

Components	for Air Contamir	Туре			alue
Carbon Dioxide (CAS 124-38-9)	ı	PEL		90	000 mg/m3
,				50	000 ppm
ETHYLBENZENE (CAS		PEL		43	35 mg/m3
100-41-4)					00 ppm
US. OSHA Table Z-2 (29 CI	FR 1910.1000)			10	эо ррш
Components	•	Туре		V	alue
BENZENE, METHYL- (CAS 108-88-3)		Ceilin	g	30	00 ppm
,	-	TWA		20	00 ppm
US. ACGIH Threshold Lim	t Values				
Components	•	Type		V	alue
BENZENE, DIMETHYL (CAS 1330-20-7)	;	STEL		15	50 ppm
(/	-	TWA		10	00 ppm
BENZENE, METHYL- (CAS		TWA) ppm
108-88-3) Carbon Dioxide (CAS	;	STEL		30	0000 ppm
124-38-9)		TWA		50	000 ppm
DICHLOROMETHANE		TWA) ppm
(CAS 75-09-2)					_
ETHYLBENZENE (CAS 100-41-4)		TWA		20) ppm
US. NIOSH: Pocket Guide					
Components		Туре		V	alue
BENZENE, METHYL- (CAS 108-88-3)	;	STEL		56	60 mg/m3
				15	50 ppm
	•	TWA		37	75 mg/m3
				10	00 ppm
Carbon Dioxide (CAS 124-38-9)	;	STEL		54	1000 mg/m3
,				30	0000 ppm
		TWA			000 mg/m3
					000 ppm
ETHYLBENZENE (CAS 100-41-4)	;	STEL			45 mg/m3
,				12	25 ppm
	-	TWA		43	35 mg/m3
				10	00 ppm
ogical limit values					
ACGIH Biological Exposur					
Components	Value		Determinant	Specimen	Sampling Time
BENZENE, DIMETHYL (CAS 1330-20-7)	1.5 g/g		Methylhippuric acids	Creatinine in urine	*
BENZENE, METHYL- (CAS	0.3 mg/g		o-Cresol, with	Creatinine in	*
108-88-3)			hydrolysis	urine	
	0.03 mg/l		Toluene	Urine	*
	0.02 mg/l		Toluene	Blood	*
DICHLOROMETHANE	0.3 mg/l		Dichlorometha	Urine	*

Components	Value	Determinant	Specimen	Sampling Time	
ETHYLBENZENE (CAS 100-41-4)	0.15 g/g	Sum of mandelic acid and phenylglyoxylic acid	Creatinine in urine	*	

^{* -} For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

BENZENE, METHYL- (CAS 108-88-3)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

BENZENE, METHYL- (CAS 108-88-3) Skin designation applies.

Appropriate engineering

controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Chemical respirator with organic vapor cartridge and full facepiece.

Skin protection

Hand protection Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove

supplier.

Other Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.

Respiratory protection Chemical respirator with organic vapor cartridge and full facepiece.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Keep away from food and drink. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance Clear.

Physical stateLiquid, Gas.FormAerosol.ColorColorless

Odor Typical Hydrocarbon/Chlorinated

Odor threshold Not available. pH Not available.

Melting point/freezing point -139 °F (-95 °C) estimated

Initial boiling point and boiling

range

Not available.

Flash point None

Evaporation rate Not available.

Flammability (solid, gas) Not applicable. Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower

1.3 % estimated

(%)

Flammability limit - upper

7 % estimated

(%)

Explosive limit - lower (%) Not available.

Explosive limit - upper (%) Not available.

Vapor pressure 579.94 hPa estimated

Vapor density Not available.

Not available. Relative density

Solubility(ies)

Not available. Solubility (water) Not available. **Partition coefficient**

(n-octanol/water)

Auto-ignition temperature

896 °F (480 °C) estimated

Decomposition temperature Not available. < 1 cSt **Viscosity**

Other information

Density 9.44 lbs/gal estimated

Not explosive. **Explosive properties**

Flame extension > 31 in Flammability (flash back) No

Heat of combustion (NFPA

30B)

10.92 kJ/g estimated

Not oxidizing. Oxidizing properties 97 % estimated Percent volatile 1.13 estimated Specific gravity 44 % w/w VOC (Weight %)

10. Stability and reactivity

The product is stable and non-reactive under normal conditions of use, storage and transport. Reactivity

Chemical stability Material is stable under normal conditions. Possibility of hazardous Hazardous polymerization does not occur.

reactions

Conditions to avoid Contact with incompatible materials.

Incompatible materials Strong acids. Strong oxidizing agents. Halogens. No hazardous decomposition products are known. Hazardous decomposition

products

11. Toxicological information

Information on likely routes of exposure

Inhalation Harmful if inhaled. May cause damage to organs through prolonged or repeated exposure by

inhalation.

Skin contact Causes skin irritation.

Eye contact Causes serious eye irritation.

Harmful if swallowed. Ingestion

Symptoms related to the physical, chemical and toxicological characteristics

Dizziness. Nausea. Severe eye irritation. Symptoms may include stinging, tearing, redness,

swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity Harmful if inhaled. Harmful if swallowed.

Test Results Components **Species**

BENZENE, DIMETHYL (CAS 1330-20-7)

Acute Dermal

LD50 Rabbit > 43 g/kg

Inhalation

LC50 Mouse 3907 mg/l, 6 Hours

> Rat 6350 mg/l, 4 Hours

Oral

LD50 Mouse 1590 mg/kg

Material name: Car Quest Carb & Choke Cleaner

Components **Test Results Species** 3523 - 8600 mg/kg Rat BENZENE, METHYL- (CAS 108-88-3) **Acute Dermal** LD50 Rabbit 12124 mg/kg 14.1 ml/kg Inhalation LC50 Mouse 5320 ppm, 8 Hours 400 ppm, 24 Hours Rat 26700 ppm, 1 Hours 12200 ppm, 2 Hours 8000 ppm, 4 Hours Oral LD50 Rat 2.6 g/kg DICHLOROMETHANE (CAS 75-09-2) **Acute** Inhalation LC50 Guinea pig 11600 ppm, 6 Hours 40.2 mg/l, 6 Hours 14400 ppm, 7 Hours Mouse 56.23 mg/l, 7 Hours 51.5 mg/l, 2 Hours 49.1 mg/l, 6 Hours Rat 2000 mg/l, 15 Minutes 88 mg/l, 900 Days 79 mg/l, 2 Hours 52 mg/l, 6 Hours LD50 Mouse 16000 ppm, 7 Hours Oral LD50 Rat 1600 mg/kg ETHYLBENZENE (CAS 100-41-4) **Acute Dermal** LD50 Rabbit 17800 mg/kg Oral Rat LD50 3500 mg/kg * Estimates for product may be based on additional component data not shown. Skin corrosion/irritation Causes skin irritation. Serious eye damage/eye Causes serious eye irritation. irritation Respiratory or skin sensitization Respiratory sensitization Not a respiratory sensitizer. Skin sensitization This product is not expected to cause skin sensitization. Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic. Carcinogenicity Suspected of causing cancer. IARC Monographs. Overall Evaluation of Carcinogenicity

3 Not classifiable as to carcinogenicity to humans. 3 Not classifiable as to carcinogenicity to humans.

BENZENE, DIMETHYL (CAS 1330-20-7)

BENZENE, METHYL- (CAS 108-88-3)

DICHLOROMETHANE (CAS 75-09-2) 2A Probably carcinogenic to humans. ETHYLBENZENE (CAS 100-41-4) 2B Possibly carcinogenic to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

DICHLOROMETHANE (CAS 75-09-2) Cancer

US. National Toxicology Program (NTP) Report on Carcinogens

DICHLOROMETHANE (CAS 75-09-2) Reasonably Anticipated to be a Human Carcinogen.

Reproductive toxicity Components in this product have been shown to cause birth defects and reproductive disorders in

laboratory animals. Suspected of damaging the unborn child.

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Causes damage to organs through prolonged or repeated exposure.

Not an aspiration hazard. **Aspiration hazard**

Chronic effects Causes damage to organs through prolonged or repeated exposure. Prolonged inhalation may be

harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Toxic to aquatic life with long lasting effects.

Cor	mponents		Species	Test Results
BEN	NZENE, DIMETHYL (CAS	3 1330-20-7)		
	Aquatic			
	Fish	LC50	Bluegill (Lepomis macrochirus)	7.711 - 9.591 mg/l, 96 hours
BEN	NZENE, METHYL- (CAS	108-88-3)		
	Aquatic			
	Crustacea	EC50	Water flea (Daphnia magna)	5.46 - 9.83 mg/l, 48 hours
	Fish	LC50	Coho salmon,silver salmon (Oncorhynchus kisutch)	8.11 mg/l, 96 hours
DIC	HLOROMETHANE (CAS	75-09-2)		
	Aquatic			
	Crustacea	EC50	Water flea (Daphnia magna)	1250 mg/l, 48 hours
	Fish	LC50	Fathead minnow (Pimephales promelas)	140.8 - 277.8 mg/l, 96 hours
ETH	HYLBENZENE (CAS 100-	41-4)		
	Aquatic			
	Crustacea	EC50	Water flea (Daphnia magna)	1.37 - 4.4 mg/l, 48 hours
	Fish	LC50	Fathead minnow (Pimephales promelas)	7.5 - 11 mg/l, 96 hours

^{*} Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

BENZENE, DIMETHYL 3.12 - 3.2BENZENE, METHYL-2.73 **DICHLOROMETHANE** 1.25 **ETHYLBENZENE** 3.15

Mobility in soil No data available.

No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation Other adverse effects potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents **Disposal instructions**

under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international

regulations.

Dispose in accordance with all applicable regulations. Local disposal regulations

Material name: Car Quest Carb & Choke Cleaner

SDS US 1035 Version #: 02 Revision date: 05-19-2015 Issue date: 05-19-2015

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some

product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Since emptied containers may retain product residue, follow label warnings even after container is Contaminated packaging

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal. Do not re-use empty containers.

14. Transport information

UN number Not available.

UN proper shipping name Consumer Commodity

Transport hazard class(es)

ORM-D

Subsidiary risk Label(s) 3

Packing group Not applicable.

Environmental hazards

Class

Marine pollutant

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IB2, T4, TP1 Special provisions

150 Packaging exceptions 202 Packaging non bulk Packaging bulk 242

IATA

UN1950 **UN** number

Aerosol, flammable **UN** proper shipping name

Transport hazard class(es)

Class 2

Subsidiary risk 6.1(PGIII) **Packing group** Not applicable.

Environmental hazards

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo

aircraft

Forbidden.

Cargo aircraft only

Forbidden.

Not established.

IMDG

UN1950 **UN** number UN proper shipping name Aerosols

Transport hazard class(es)

Class

Subsidiary risk 6.1(PGIII) Packing group Not applicable.

Environmental hazards

Marine pollutant Yes

Not available. **EmS**

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and

the IBC Code

Material name: Car Quest Carb & Choke Cleaner

1035 Version #: 02 Revision date: 05-19-2015 Issue date: 05-19-2015

IATA; IMDG



Marine pollutant



General information IMDG Regulated Marine Pollutant. DOT Regulated Marine Pollutant.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

CERCLA Hazardous Substance List (40 CFR 302.4)

BENZENE, DIMETHYL (CAS 1330-20-7) Listed. BENZENE, METHYL- (CAS 108-88-3) Listed. DICHLOROMETHANE (CAS 75-09-2) Listed. ETHYLBENZENE (CAS 100-41-4) Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

DICHLOROMETHANE (CAS 75-09-2) Cancer

Heart

Central nervous system

Liver Skin irritation Eve irritation

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes

Delayed Hazard - Yes Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous

No

chemical

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
DICHLOROMETHANE	75-09-2	60 - < 70
BENZENE, DIMETHYL	1330-20-7	10 - < 20
BENZENE, METHYL-	108-88-3	10 - < 20
ETHYLBENZENE	100-41-4	1 - < 3

1035 Version #: 02 Revision date: 05-19-2015 Issue date: 05-19-2015

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

BENZENE, DIMETHYL (CAS 1330-20-7) BENZENE, METHYL- (CAS 108-88-3) DICHLOROMETHANE (CAS 75-09-2) ETHYLBENZENE (CAS 100-41-4)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act Not regulated. (SDWA)

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

BENZENE, METHYL- (CAS 108-88-3) 6594

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

BENZENE. METHYL- (CAS 108-88-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

BENZENE, METHYL- (CAS 108-88-3) 594

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd.

(a))

BENZENE, DIMETHYL (CAS 1330-20-7) BENZENE, METHYL- (CAS 108-88-3) DICHLOROMETHANE (CAS 75-09-2) ETHYLBENZENE (CAS 100-41-4)

US. Massachusetts RTK - Substance List

BENZENE, DIMETHYL (CAS 1330-20-7) BENZENE, METHYL- (CAS 108-88-3) Carbon Dioxide (CAS 124-38-9) DICHLOROMETHANE (CAS 75-09-2) ETHYLBENZENE (CAS 100-41-4)

US. New Jersey Worker and Community Right-to-Know Act

BENZENE, DIMETHYL (CAS 1330-20-7) BENZENE, METHYL- (CAS 108-88-3) Carbon Dioxide (CAS 124-38-9) DICHLOROMETHANE (CAS 75-09-2) ETHYLBENZENE (CAS 100-41-4)

US. Pennsylvania Worker and Community Right-to-Know Law

BENZENE, DIMETHYL (CAS 1330-20-7) BENZENE, METHYL- (CAS 108-88-3) Carbon Dioxide (CAS 124-38-9) DICHLOROMETHANE (CAS 75-09-2) ETHYLBENZENE (CAS 100-41-4)

US. Rhode Island RTK

BENZENE, DIMETHYL (CAS 1330-20-7) BENZENE, METHYL- (CAS 108-88-3) DICHLOROMETHANE (CAS 75-09-2) ETHYLBENZENE (CAS 100-41-4)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

Listed: January 1, 1991

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

DICHLOROMETHANE (CAS 75-09-2) Listed: April 1, 1988 ETHYLBENZENE (CAS 100-41-4) Listed: June 11, 2004

US - California Proposition 65 - CRT: Listed date/Developmental toxin

US - California Proposition 65 - CRT: Listed date/Female reproductive toxin
BENZENE, METHYL- (CAS 108-88-3)
Listed: August 7, 2009

1035 Version #: 02 Revision date: 05-19-2015 Issue date: 05-19-2015

BENZENE, METHYL- (CAS 108-88-3)

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances	Yes

(PICCS)

United States & Puerto Rico Toxic Substances Control Act (TSCA) Inventory

16. Other information, including date of preparation or last revision

 Issue date
 05-19-2015

 Revision date
 05-19-2015

Version # 02

Disclaimer The information provided in this Safety Data Sheet is correct to the best of our knowledge,

information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other

materials or in any process, unless specified in the text.

Material name: Car Quest Carb & Choke Cleaner

12 / 12

1035 Version #: 02 Revision date: 05-19-2015 Issue date: 05-19-2015

Yes

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

Date Printed: 02/20/2014

Page:

Product Code: 90995F MSDS

Product Name: FF GCMI 90 BLACK ED VIII

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product: FF GCMI 90 BLACK ED VIII

The J.M. Fry Company 4329 Eubank Road, Richmond, VA 23231 Information Phone: 804-236-8100

24-HR EMERGENCY PHONE: CHEMTREC 1-800-262-8200

2. COMPOSITION/INFORMATION ON HAZARDOUS INGREDIENTS

Component/Exposure Limits

CAS#

Weight %

N/A

3. HAZARDS IDENTIFICATION

Potential Health Effects

EYES: MAY CAUSE IRRITATION OR BURNING.

SKIN: MAY DRY AND DEFAT SKIN CAUSING IRRITATION AND DERMATITIS AFTER REPEATED EXPOSURE. OTHER AFFECTS OF ABSORPTION ARE UNKNOWN.

INGESTION: INGESTION CAN CAUSE GASTROINTESTINAL IRRITATION AND NAUSEA. THE EXACT NATURE AND INTENSITY OF TOXIC EFFECTS FOLLOWING INGESTION IS UNKNOWN. SEEK MEDICAL ATTENTION.

INHALATION: VAPORS MAY CAUSE HEADACHE OR NAUSEA IN SENSITIVE INDIVIDUALS.

1. FIRST AID MEASURES

EYES: FLUSH WITH WATER OR EYE WASH SOLUTION, INCLUDING UNDER THE EYELIDS, FOR AT LEAST 15 MINUTES. CONTACT A PHYSICIAN IMMEDIATELY.

SKIN: REMOVE CONTAMINATED CLOTHING. WASH THOROUGHLY WITH SOAP AND WATER. IF IRRITATION OCCURS, CONTACT A PHYSICIAN.

INGESTION: GIVE ONE TO TWO GLASSES OF WATER. DO NOT INDUCE VOMITING. CONSULT A PHYSICIAN OR POISON CONTROL CENTER IMMEDIATELY. TREAT SYMPTOMATICALLY.

INHALATION: REMOVE TO FRESH AIR. RESTORE OR SUPPORT BREATHING. CONTACT A PHYSICIAN IF BREATHING DIFFICULTIES OCCUR.

NOTE TO PHYSICIANS: THIS PRODUCT HAS A PH OF 8.5 TO 9.5.

. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

Flash Point: >200 DEG F

Method: PM CC

Date Printed: 02/20/2014

Page:

Product Code: 90995F MSDS

Product Name: FF GCMI 90 BLACK ED VIII

FLAMMABLE LIMITS: (SOLVENT PORTION ONLY, IF APPLICABLE)

Lower flammable limit: N/A Upper flammable limit: N/A

AUTOIGNITION TEMPERATURE: UNKNOWN

HAZARDOUS COMBUSTION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED. FUMES WILL CONTAIN CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

EXTINGUISHING MEDIA: FOAM, ALCOHOL FOAM, CO2, DRY CHEMICAL, WATER, WATER FOG.

FIREFIGHTING INSTRUCTIONS: SELF-CONTAINED BREATHING APPARATUS SHOULD BE WORN TO AVOID INHALATION OF CONCENTRATED VAPORS IN FIRE AREA. USE EXTINGUISHING MEDIA APPROPRIATE FOR SURROUNDING FIRE.

6. ACCIDENTAL RELEASE MEASURES

SMALL SPILL: DIKE TO PREVENT SPREAD USING ABSORBENT MATERIAL OR CHEMICAL DAMS. SCOOP OR PUMP MATERIAL INTO WATER PROOF CONTAINERS FOR DISPOSAL. STAINS MAY BE REMOVED WITH COMMERCIAL STRENGTH SOAP.

7. HANDLING AND STORAGE

HANDLING: HANDLE ACCORDING TO LABEL INSTRUCTIONS.

STORAGE: THIS PRODUCT HAS BEEN DESIGNED AND PACKAGED FOR INDUSTRIAL USE ONLY! STORE AWAY FROM EXCESSIVE HEAT, COLD OR FREEZING TEMPERATURES. DO NOT TRANSFER TO UNMARKED CONTAINERS. ROTATE STOCK. KEEP CONTAINERS CLOSED WHEN NOT IN USE.

3. EXPOSURE CONTROLS/PERSONAL PROTECTION

ENGINEERING CONTROLS: NONE NEEDED UNLESS TLV LIMITS ARE EXCEEDED.

RESPIRATORY PROTECTION: NOT NORMALLY REQUIRED WITH ADEQUATE VENTILATION. IF TLV IS EXCEEDED FOR AIRBORNE MISTS, USE NIOSH APPROVED RESPIRATOR OR SELF CONTAINED BREATHING APPARATUS.

SKIN PROTECTION: CHEMICAL-RESISTANT GLOVES, APRONS, AND COVERALLS RECOMMENDED WHEN MIXING, FILLING, POURING OR CLEANING EQUIPMENT.

EYE PROTECTION: PROTECTIVE GLASSES OR CHEMICAL-RESISTANT SPLASH GOGGLES RECOMMENDED WHEN HANDLING. MAINTAIN EYE WASH FACILITIES IN WORK AREA.

. PHYSICAL AND CHEMICAL PROPERTIES

BOILING POINT: > 212 DEG F MELTING POINT: NOT AVAILABLE. FREEZING POINT: UNKNOWN

VAPOR PRESSURE: NOT AVAILABLE. VAPOR DENSITY: HEAVIER THAN AIR SOLUBILITY IN WATER: COMPLETE

Date Printed: 02/20/2014

Page: 3

Product Code: 90995F MSDS

Product Name: FF GCMI 90 BLACK ED VIII

SPECIFIC GRAVITY: 1.10

VOLATILE ORGANIC COMPOUNDS: 0.06 lb/gl

pH: 8.5-9.5

WEIGHT PER GALLON: 9.20 lb/ql VOLATILE WEIGHT PERCENT: 78.00% APPEARANCE: LIQUID, VARIOUS COLORS

ODOR: MILD ACRYLIC ODOR

10. STABILITY AND REACTIVITY

CHEMICAL STABILITY (CONDITIONS TO AVOID): STABLE UNDER NORMAL CONDITIONS OF USE. AVOID EXCESSIVE HEAT OR COLD. AVOID EXCESSIVE AGING BEYOND RECOMMENDED SHELF LIFE.

INCOMPATIBILITY: PRODUCT IS NORMALLY UNREACTIVE. STRONG ACIDS MAY CAUSE PRODUCT TO GEL.

HAZARDOUS DECOMPOSITION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED FUMES WILL CONTAIN ... CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR.

11. TOXICOLOGICAL INFORMATION

EYE: NO AVAILABLE INFORMATION.

SKIN: NO AVAILABLE INFORMATION.

ORAL: NO AVAILABLE INFORMATION

CHRONIC/CARCINOGENICITY: INFORMATION OBTAINED FROM OUR SUPPLIERS INDICATES THIS PRODUCT IS NOT RATED AS CARCINOGENIC UNDER NORMALLY EXPECTED CONDITIONS OF HANDLING AND USE.

12. ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION: NO AVAILABLE INFORMATION.

13. DISPOSAL CONSIDERATIONS

DISPOSE OF IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS.

14. TRANSPORT INFORMATION (Not all-inclusive)

NOT REGULATED PER U.S. DOT

.5. REGULATORY INFORMATION (Not all-inclusive - Selected regulations represented)

SARA 312, SARA 313, and HAP Components:	CAS#	% BY WT.
ETHANOLAMINE (SKIN AND EYE IRRITANT)	141-43-5	0.60
AMMONIUM HYDROXIDE	1336-21-6	0.30

Date Printed: 02/20/2014

Page:

Product Code: 90995F MSDS

Product Name: FF GCMI 90 BLACK ED VIII

WARNING: THIS PRODUCT CONTAINS CHEMICAL(S) KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, OR OTHER REPRODUCTIVE HARM.

N/A

16. OTHER INFORMATION

HMIS CODES: H F R P

THE INFORMATION CONTAINED HEREIN IS ACCURATE TO THE BEST OF OUR KNOWLEDGE AND BELIEF. HOWEVER, SINCE CONDITIONS OF USE AND HANDLING ARE BEYOND OUR CONTROL, WE MAKE NO GUARANTEE OF RESULTS AND ASSUME NO LIABILITY FOR DAMAGES INCURRED BY USE OF THIS MATERIAL. FINAL DETERMINATION FOR SAFE USE OF THIS PRODUCT IS THE SOLE RESPONSIBLILITY OF THE USER. THE ABOVE DATA IS CONFIDENTIAL, PROPRIETARY INFORMATION OF THE J.M. FRY COMPANY AND IS BEING TRANSMITTED TO ASSIST IN IMPROVING EMPLOYEE OR PUBLIC SAFETY AND HEALTH OR FOR GOVERNMENTAL AGENCY DATA COLLECTION PURPOSES ONLY.

Date Printed: 04/16/2014

Page:

Product Code: 115109

Product Name: NF OVERPRINT VARNISH

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product: NF OVERPRINT VARNISH

The J.M. Fry Company 4329 Eubank Road, Richmond, VA 23231 Information Phone: 804-236-8100

24-HR EMERGENCY PHONE: CHEMTREC 1-800-262-8200

2. COMPOSITION/INFORMATION ON HAZARDOUS INGREDIENTS

Component/Exposure Limits

CAS#

Weight %

N/A

3. HAZARDS IDENTIFICATION

Potential Health Effects

EYES: MAY CAUSE IRRITATION OR BURNING.

SKIN: MAY DRY AND DEFAT SKIN CAUSING IRRITATION AND DERMATITIS AFTER REPEATED EXPOSURE. OTHER AFFECTS OF ABSORPTION ARE UNKNOWN.

INGESTION: INGESTION CAN CAUSE GASTROINTESTINAL IRRITATION AND NAUSEA. THE EXACT NATURE AND INTENSITY OF TOXIC EFFECTS FOLLOWING INGESTION IS UNKNOWN. SEEK MEDICAL ATTENTION.

INHALATION: VAPORS MAY CAUSE HEADACHE OR NAUSEA IN SENSITIVE INDIVIDUALS.

4. FIRST AID MEASURES

EYES: FLUSH WITH WATER OR EYE WASH SOLUTION, INCLUDING UNDER THE EYELIDS, FOR AT LEAST 15 MINUTES. CONTACT A PHYSICIAN IMMEDIATELY.

SKIN: REMOVE CONTAMINATED CLOTHING. WASH THOROUGHLY WITH SOAP AND WATER. IF IRRITATION OCCURS, CONTACT A PHYSICIAN.

INGESTION: GIVE ONE TO TWO GLASSES OF WATER. DO NOT INDUCE VOMITING. CONSULT A PHYSICIAN OR POISON CONTROL CENTER IMMEDIATELY. TREAT SYMPTOMATICALLY.

INHALATION: REMOVE TO FRESH AIR. RESTORE OR SUPPORT BREATHING. CONTACT A PHYSICIAN IF BREATHING DIFFICULTIES OCCUR.

NOTE TO PHYSICIANS:

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

Flash Point: >200 DEG F

Method: PM CC

Date Printed: 04/16/2014

Page:

Product Code: 115109

Product Name: NF OVERPRINT VARNISH

FLAMMABLE LIMITS: (SOLVENT PORTION ONLY, IF APPLICABLE)

Lower flammable limit: N/A Upper flammable limit: N/A

AUTOIGNITION TEMPERATURE: UNKNOWN

HAZARDOUS COMBUSTION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED. FUMES WILL CONTAIN CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

EXTINGUISHING MEDIA: FOAM, ALCOHOL FOAM, CO2, DRY CHEMICAL, WATER, WATER FOG.

FIREFIGHTING INSTRUCTIONS: SELF-CONTAINED BREATHING APPARATUS SHOULD BE WORN TO AVOID INHALATION OF CONCENTRATED VAPORS IN FIRE AREA. USE EXTINGUISHING MEDIA APPROPRIATE FOR SURROUNDING FIRE.

6. ACCIDENTAL RELEASE MEASURES

SMALL SPILL: DIKE TO PREVENT SPREAD USING ABSORBENT MATERIAL OR CHEMICAL DAMS. SCOOP OR PUMP MATERIAL INTO WATER PROOF CONTAINERS FOR DISPOSAL. STAINS MAY BE REMOVED WITH COMMERCIAL STRENGTH SOAP.

7. HANDLING AND STORAGE

HANDLING: HANDLE ACCORDING TO LABEL INSTRUCTIONS.

STORAGE: THIS PRODUCT HAS BEEN DESIGNED AND PACKAGED FOR INDUSTRIAL USE ONLY! STORE AWAY FROM EXCESSIVE HEAT, COLD OR FREEZING TEMPERATURES. DO NOT TRANSFER TO UNMARKED CONTAINERS, ROTATE STOCK, KEEP CONTAINERS CLOSED WHEN NOT IN USE.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

ENGINEERING CONTROLS: NONE NEEDED UNLESS TLV LIMITS ARE EXCEEDED.

RESPIRATORY PROTECTION: NOT NORMALLY REQUIRED WITH ADEQUATE VENTILATION. IF TLV IS EXCEEDED FOR AIRBORNE MISTS, USE NIOSH APPROVED RESPIRATOR OR SELF CONTAINED BREATHING APPARATUS.

SKIN PROTECTION: CHEMICAL-RESISTANT GLOVES, APRONS, AND COVERALLS RECOMMENDED WHEN MIXING, FILLING, POURING OR CLEANING EQUIPMENT.

EYE PROTECTION: PROTECTIVE GLASSES OR CHEMICAL-RESISTANT SPLASH GOGGLES RECOMMENDED WHEN HANDLING. MAINTAIN EYE WASH FACILITIES IN WORK AREA.

9. PHYSICAL AND CHEMICAL PROPERTIES

BOILING POINT: > 212 DEG F MELTING POINT: NOT AVAILABLE.

FREEZING POINT:

VAPOR PRESSURE: NOT AVAILABLE. VAPOR DENSITY: HEAVIER THAN AIR SOLUBILITY IN WATER: COMPLETE

Date Printed: 04/16/2014

Page:

Product Code: 115109

Product Name: NF OVERPRINT VARNISH

SPECIFIC GRAVITY: 1.03

VOLATILE ORGANIC COMPOUNDS: 0.03 1b/ql

pH: 7.2-8.5

WEIGHT PER GALLON: 8.56 lb/gl VOLATILE WEIGHT PERCENT: 63.68% APPEARANCE: COLORLESS LIQUID ODOR: MILD AMMONIA/ACRYLIC ODOR

10. STABILITY AND REACTIVITY

CHEMICAL STABILITY (CONDITIONS TO AVOID): STABLE UNDER NORMAL CONDITIONS OF USE. AVOID EXCESSIVE HEAT OR COLD. AVOID EXCESSIVE AGING BEYOND RECOMMENDED SHELF LIFE.

INCOMPATIBILITY: PRODUCT IS NORMALLY UNREACTIVE. STRONG ACIDS MAY CAUSE PRODUCT TO GEL.

HAZARDOUS DECOMPOSITION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED. FUMES WILL CONTAIN.

CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL

DECOMPOSITION PRODUCTS ARE NOT KNOWN.

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR.

11. TOXICOLOGICAL INFORMATION

EYE: NO AVAILABLE INFORMATION.

SKIN: NO AVAILABLE INFORMATION.

ORAL: NO AVAILABLE INFORMATION

CHRONIC/CARCINOGENICITY: INFORMATION OBTAINED FROM OUR SUPPLIERS INDICATES THIS PRODUCT IS NOT RATED AS CARCINOGENIC UNDER NORMALLY EXPECTED CONDITIONS OF HANDLING AND USE.

12. ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION: NO AVAILABLE INFORMATION.

13. DISPOSAL CONSIDERATIONS

DISPOSE OF IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS.

14. TRANSPORT INFORMATION (Not all-inclusive)

NOT REGULATED PER U.S. DOT

15. REGULATORY INFORMATION (Not all-inclusive - Selected regulations represented)

SARA 312, SARA 313, and HAP Components:

CAS#

% BY WT.

Date Printed: 04/16/2014

Page:

Product Code: 115109

Product Name: NF OVERPRINT VARNISH

WARNING: THIS PRODUCT CONTAINS CHEMICAL(S) KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, OR OTHER REPRODUCTIVE HARM.

N/A

16. OTHER INFORMATION

HMIS CODES: H F R P 1 1 0 B

THE INFORMATION CONTAINED HEREIN IS ACCURATE TO THE BEST OF OUR KNOWLEDGE AND BELIEF. HOWEVER, SINCE CONDITIONS OF USE AND HANDLING ARE BEYOND OUR CONTROL, WE MAKE NO GUARANTEE OF RESULTS AND ASSUME NO LIABILITY FOR DAMAGES INCURRED BY USE OF THIS MATERIAL. FINAL DETERMINATION FOR SAKE USE OF THIS PRODUCT IS THE GOLE RESPONSIBLILITY OF THE USHR. THE ABOVE DATA IS CONFIDENTIAL, PROPRIETARY INFORMATION OF THE J.M. FRY COMPANY AND IS BEING TRANSMITTED TO ASSIST IN IMPROVING EMPLOYEE OR PUBLIC SAFETY AND HEALTH OR FOR GOVERNMENTAL AGENCY DATA COLLECTION PURPOSES ONLY.

Date Printed: 04/16/2014 Page: 1

Product Code: M-000028

Product Name: SF PH ADJUSTER (#1000 SOLUTION)

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product: SF PH ADJUSTER (#1000 SOLUTION)

The J.M. Fry Company

4329 Eubank Road, Richmond, VA 23231

Information Phone: 804-236-8100

24-HR EMERGENCY PHONE: CHEMTREC 1-800-262-8200

2. COMPOSITION/INFORMATION ON HAZARDOUS INGREDIENTS

Component/Exposure Limits	CAS#	Weight %
ETHANOLAMINE (SKIN AND EYE IRR	RITANT) 141-43-5	50.00
OSHA PEL: 3 PPM, ACGIH T	LV: 3 PPM, OTHER N/A	of the homeonomy to the in

3. HAZARDS IDENTIFICATION

Potential Health Effects

EYES: CAN CAUSE PERMANENT EYE INJURY. SYMPTOMS INCLUDE STINGING, TEARING, REDNESS, AND SWELLING OF EYE. CAN INJURE CORNEA AND CAUSE BLINDNESS.

SKIN: CAN CAUSE PERMANENT SKIN DAMAGE. SYMPTOMS MAY INCLUDE REDNESS, BURNING, AND SWELLING OF THE SKIN, BURNS AND OTHER SKIN DAMAGE. PASSAGE OF THIS MATERIAL INTO THE BODY THROUGH THE SKIN IS POSSIBLE, AND SKIN CONTACT MAY BE HARMFUL.

INGESTION: SWALLOWING THIS MATERIAL MAY BE HARMFUL OR FATAL. SYMPTOMS MAY INCLUDE SEVERE STOMACH AND INTESTINAL IRRITATION, ABDOMINAL PAIN, AND VOMITING OF BLOOD. SWALLOWING THIS MATERIAL MAY CAUSE BURNS AND DESTROY TISSUE IN MOUTH, THROAT, AND DIGESTIVE TRACT. LOW BLOOD PRESSURE AND SHOCK MAY OCCUR AS RESULT OF SEVERE TISSUE INJURY. THIS MATERIAL CAN GET INTO LUNGS DURING SWALLOWING OR VOMITING. THIS RESULTS IN LUNG INFLAMMATION AND OTHER LUNG INJURY.

INHALATION: BREATHING OF VAPOR OR MIST IS POSSIBLE. BREATHING THIS MATERIAL MAY BE HARMFUL OR FATAL. SYMPTOMS MAY INCLUDE SEVERE IRRITATION AND BURNS TO THE NOSE, THROAT, AND RESPIRATORY TRACT. SYMPTOMS USUALLY OCCUR AT AIR CONCENTRATIONS HIGHER THAN THE RECOMMENDED EXPOSURE LIMITS.

4. FIRST AID MEASURES

EYES: FLUSH WITH WATER OR EYE WASH SOLUTION, INCLUDING UNDER THE EYELIDS, FOR AT LEAST 15 MINUTES. CONTACT A PHYSICIAN IMMEDIATELY.

SKIN: REMOVE CONTAMINATED CLOTHING. WASH THOROUGHLY WITH SOAP AND WATER. IF IRRITATION OCCURS, CONTACT A PHYSICIAN.

INGESTION: IF SWALLOWED, DO NOT INDUCE VOMITING. GIVE LARGE QUANTITIES OF WATER. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON. GET MEDICAL ATTENTION IMMEDIATELY.

Date Printed: 04/16/2014

Page:

Product Code: M-000028

Product Name: SF PH ADJUSTER (#1000 SOLUTION)

INHALATION: REMOVE TO FRESH AIR, RESTORE OR SUPPORT BREATHING. CONTACT A PHYSICIAN IF BREATHING DIFFICULTIES OCCUR.

NOTE TO PHYSICIANS: THIS MATERIAL IS AN ASPIRATION HAZARD, POTENTIAL DANGER FROM ASPIRATION MUST BE WEIGHED AGAINST POSSIBLE ORAL TOXICITY WHEN DECIDING WHETHER TO INDUCE VOMITING. PREEXISTING DISORDERS OF THE FOLLOWING ORGANS MAY BE AGGRAVATED BY EXPOSURE TO THIS MATERIAL: SKIN, LUNG(FOR EXAMPLE, ASTHMA-LIKE CONDITIONS), LIVER, KIDNEY.

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

Flash Point: 185 DEGREES F Method: TCC

FLAMMABLE LIMITS: (SOLVENT PORTION ONLY, IF APPLICABLE)

Lower flammable limit: 5.5 Upper flammable limit: 17

AUTOIGNITION TEMPERATURE: 770 DEGREES F

No. Self-Superport and present an investment of the contract o

HAZARDOUS COMBUSTION PRODUCTS: BURNING MAY PRODUCE AMMONIA, NITROGEN OXIDES, CARBON MONOXIDE, AND CARBON DIOXIDE.

EXTINGUISHING MEDIA: FOAM, ALCOHOL FOAM, CO2, DRY CHEMICAL

FIREFIGHTING INSTRUCTIONS: WEAR A SELF-CONTAINED BREATHING APPARATUS WITH A FULL FACEPIECE OPERATED IN THE POSITIVE PRESSURE DEMAND MODE WITH APPROPRIATE TURN OUT GEAR AND CHEMICAL RESISTANT PERSONAL PROTECTIVE EQUIPMENT. WATER MUST NOT BE USED ON FIRE.

6. ACCIDENTAL RELEASE MEASURES

SMALL SPILL: ELIMINATE ALL SOURCES OF IGNITION SUCH AS FLARES, FLAMES, ELECTRICAL SPARKS, ABSORB LIQUID ON VERMICULITE, FLOOR ABSORBENT OR OTHER ABSORBENT MATERIAL, PERSONS NOT WEARING PROPER PERSONAL PROTECTIVE EQUIPMENT SHOULD BE EXCLUDED FROM AREA OF SPILL. SCOOP OR SCRAPE UP. PUT IN CONTAINER FOR RECOVERY OR DISPOSAL.

7. HANDLING AND STORAGE

HANDLING: CONTAINERS OF THIS MATERIAL MAY BE HAZARDOUS WHEN EMPTIED. SINCE EMPTIED CONTAINERS RETAIN PRODUCT RESIDUES (VAPOR, LIQUID, AND/OR SOLID), ALL HAZARD PRECAUTIONS GIVEN IN DATA SHEET MUST BE OBSERVED. ALL FIVE-GALLON PAILS AND LARGER CONTAINERS SHOULD BE GROUNDED WHEN MATERIAL IS TRANSFERRED.

STORAGE: THIS PRODUCT HAS BEEN DESIGNED AND PACKAGED FOR INDUSTRIAL USE ONLY! STORE AWAY FROM EXCESSIVE HEAT, COLD OR FREEZING TEMPERATURES. DO NOT TRANSFER TO UNMARKED CONTAINERS. DO NOT STORE IN ALUMINUM CONTAINERS, ROTATE STOCK, KEEP CONTAINERS CLOSED WHEN NOT IN USE.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

ENGINEERING CONTROLS: A SYSTEM OF LOCAL AND/OR GENERAL EXHAUST IS RECOMMENDED TO KEEP EMPLOYEE EXPOSURES BELOW THE AIRBORNE EXPOSURE LIMITS. LOCAL EXHAUST VENTILATION IS GENERALLY PREFERRED BECAUSE IT CAN CONTROL THE EMISSIONS OF CONTAMINANT AT ITS SOURCE,

Date Printed: 04/16/2014

Page:

Product Code: M-000028

Product Name: SF PH ADJUSTER (#1000 SOLUTION)

PREVENTING DISPERSION OF IT INTO GENERAL WORK AREA.

RESPIRATORY PROTECTION: NOT NORMALLY REQUIRED WITH ADEQUATE VENTILATION. IF TLV IS EXCEEDED FOR AIRBORNE MISTS, USE NIOSH APPROVED RESPIRATOR OR SELF CONTAINED BREATHING APPARATUS.

SKIN PROTECTION: CHEMICAL-RESISTANT GLOVES, APRONS, AND COVERALLS RECOMMENDED WHEN MIXING, FILLING, POURING OR CLEANING EQUIPMENT.

EYE PROTECTION: PROTECTIVE GLASSES OR CHEMICAL-RESISTANT SPLASH GOGGLES RECOMMENDED WHEN HANDLING. MAINTAIN EYE WASH FACILITIES IN WORK AREA.

9. PHYSICAL AND CHEMICAL PROPERTIES

BOILING POINT: 340 DEGREES F MELTING POINT: 50.5 DEGREES F FREEZING POINT: 50.5 DEGREES F

VAPOR PRESSURE: < 1.000 mmHG@ 70 DEGREES F

VAPOR DENSITY: HEAVIER THAN AIR SOLUBILITY IN WATER: COMPLETE SPECIFIC GRAVITY: 1.01

VOLATILE ORGANIC COMPOUNDS: 4.20 lb/gl

pH: 10.5-12.2

WEIGHT PER GALLON: 8.40 lb/gl VOLATILE WEIGHT PERCENT: 100.00% APPEARANCE: COLORLESS LIQUID

ODOR: AMMONIA ODOR

10. STABILITY AND REACTIVITY

CHEMICAL STABILITY (CONDITIONS TO AVOID): STABLE UNDER NORMAL CONDITIONS OF USE

INCOMPATIBILITY: AVOID CONTACT WITH: ALDEHYDES, KETONES, ORGANIC ANHYDRIDES, ORGANIC HALIDES, STRONG ACIDS, STRONG ALKALIES, STRONG OXIDIZING AGENTS.

HAZARDOUS DECOMPOSITION PRODUCTS: BURNING MAY PRODUCE AMMONIA, NITROGEN OXIDES, CARBON DIOXIDE AND CARBON MONOXIDE.

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR.

11. TOXICOLOGICAL INFORMATION

EYE: NO AVAILABLE INFORMATION.

SKIN: DERMAL LD50 (RABBIT): 1000mg/kg

ORAL: NO AVAILABLE INFORMATION

CHRONIC/CARCINOGENICITY: INFORMATION OBTAINED FROM OUR SUPPLIERS INDICATES THIS PRODUCT IS NOT RATED AS CARCINOGENIC UNDER NORMALLY EXPECTED CONDITIONS OF HANDLING AND USE.

Date Printed: 04/16/2014

Page:

Product Code: M-000028

Product Name: SF PH ADJUSTER (#1000 SOLUTION)

12. ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION: NO AVAILABLE INFORMATION.

13. DISPOSAL CONSIDERATIONS

DISPOSE OF IN ACCORDANCE WITH CURRENT LOCAL, STATE, AND FEDERAL REGULATIONS.

14. TRANSPORT INFORMATION (Not all-inclusive)

DOT INFORMATION- 49 CFR 172.101, DOT DESCRIPTION: ETHANOLAMINE, 8, UN2491, III.

15. REGULATORY INFORMATION (Not all-inclusive - Selected regulations represented)

SARA 312, SARA 313, and HAP Components:

CAS#

N/A

16. OTHER INFORMATION

HMIS CODES: H F R P 2 1 0 B

THE INFORMATION CONTAINED HEREIN IS ACCURATE TO THE BEST OF OUR KNOWLEDGE AND BELIEF. HOWEVER, SINCE CONDITIONS OF USE AND HANDLING ARE BEYOND OUR CONTROL, WE MAKE NO GUARANTEE OF RESULTS AND ASSUME NO LIABILITY FOR DAMAGES INCURRED BY USE OF THIS MATERIAL. FINAL DETERMINATION FOR SAFE USE OF THIS PRODUCT IS THE SOLE RESPONSIBLILITY OF THE USER. THE ABOVE DATA IS CONFIDENTIAL, PROPRIETARY INFORMATION OF THE J.M. FRY COMPANY AND IS BEING TRANSMITTED TO ASSIST IN IMPROVING EMPLOYEE OR PUBLIC SAFETY AND HEALTH OR FOR GOVERNMENTAL AGENCY DATA COLLECTION PURPOSES ONLY.

Date Printed: 04/16/2014

Page:

Product Code: M-007508

Product Name: FF PREM PLUS GCMI 103 YELLOW (ED.X)

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product: FF PREM PLUS GCMI 103 YELLOW (ED.X)

The J.M. Fry Company 4329 Eubank Road, Richmond, VA 23231 Information Phone: 804-236-8100

24-HR EMERGENCY PHONE: CHEMTREC 1-800-262-8200

2. COMPOSITION/INFORMATION ON HAZARDOUS INGREDIENTS

Component/Exposure Limits

CAS# Weight %

N/A

3. HAZARDS IDENTIFICATION

Potential Health Effects

EYES: MAY CAUSE IRRITATION OR BURNING

SKIN: MAY DRY AND DEFAT SKIN CAUSING IRRITATION AND DERMATITIS AFTER REPEATED EXPOSURE. OTHER AFFECTS OF ABSORPTION ARE UNKNOWN.

INGESTION: INGESTION CAN CAUSE GASTROINTESTINAL IRRITATION AND NAUSEA. THE EXACT NATURE AND INTENSITY OF TOXIC EFFECTS FOLLOWING INGESTION IS UNKNOWN. SEEK MEDICAL ATTENTION.

INHALATION: VAPORS MAY CAUSE HEADACHE OR NAUSEA IN SENSITIVE INDIVIDUALS.

4. FIRST AID MEASURES

EYES: FLUSH WITH WATER OR EYE WASH SOLUTION, INCLUDING UNDER THE EYELIDS, FOR AT LEAST 15 MINUTES. CONTACT A PHYSICIAN IMMEDIATELY.

SKIN: REMOVE CONTAMINATED CLOTHING. WASH THOROUGHLY WITH SOAP AND WATER. IF IRRITATION OCCURS, CONTACT A PHYSICIAN.

INGESTION: GIVE ONE TO TWO GLASSES OF WATER. DO NOT INDUCE VOMITING. CONSULT A PHYSICIAN OR POISON CONTROL CENTER IMMEDIATELY. TREAT SYMPTOMATICALLY.

INHALATION: REMOVE TO FRESH AIR. RESTORE OR SUPPORT BREATHING. CONTACT A PHYSICIAN IF BREATHING DIFFICULTIES OCCUR.

NOTE TO PHYSICIANS: THIS PRODUCT HAS A PH OF 8.5 TO 9.5.

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

Flash Point: >200 DEG F Method: PM CC

Date Printed: 04/16/2014

Page:

The second secon

Product Code: M-007508

Product Name: FF PREM PLUS GCMI 103 YELLOW (ED.X)

FLAMMABLE LIMITS: (SOLVENT PORTION ONLY, IF APPLICABLE)

Lower flammable limit: N/A Upper flammable limit: N/A

AUTOIGNITION TEMPERATURE: UNKNOWN

HAZARDOUS COMBUSTION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED. FUMES WILL CONTAIN CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

EXTINGUISHING MEDIA: FOAM, ALCOHOL FOAM, CO2, DRY CHEMICAL, WATER, WATER FOG.

FIREFIGHTING INSTRUCTIONS: SELF-CONTAINED BREATHING APPARATUS SHOULD BE WORN TO AVOID INHALATION OF CONCENTRATED VAPORS IN FIRE AREA. USE EXTINGUISHING MEDIA APPROPRIATE FOR SURROUNDING FIRE.

6. ACCIDENTAL RELEASE MEASURES

SMALL SPILL: DIKE TO PREVENT SPREAD USING ABSORBENT MATERIAL OR CHEMICAL DAMS, SCOOP OR PUMP MATERIAL INTO WATER PROOF CONTAINERS FOR DISPOSAL, STAINS MAY BE REMOVED WITH COMMERCIAL STRENGTH SOAP.

7. HANDLING AND STORAGE

HANDLING: HANDLE ACCORDING TO LABEL INSTRUCTIONS.

STORAGE: THIS PRODUCT HAS BEEN DESIGNED AND PACKAGED FOR INDUSTRIAL USE ONLY! STORE AWAY FROM EXCESSIVE HEAT, COLD OR FREEZING TEMPERATURES. DO NOT TRANSFER TO UNMARKED CONTAINERS. ROTATE STOCK, KEEP CONTAINERS CLOSED WHEN NOT IN USE.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

ENGINEERING CONTROLS: NONE NEEDED UNLESS TLV LIMITS ARE EXCEEDED.

RESPIRATORY PROTECTION: NOT NORMALLY REQUIRED WITH ADEQUATE VENTILATION. IF TLV IS EXCEEDED FOR AIRBORNE MISTS, USE NIOSH APPROVED RESPIRATOR OR SELF CONTAINED BREATHING APPARATUS.

SKIN PROTECTION: CHEMICAL-RESISTANT GLOVES, APRONS, AND COVERALLS RECOMMENDED WHEN MIXING, FILLING, POURING OR CLEANING EQUIPMENT.

EYE PROTECTION: PROTECTIVE GLASSES OR CHEMICAL-RESISTANT SPLASH GOGGLES RECOMMENDED WHEN HANDLING. MAINTAIN EYE WASH FACILITIES IN WORK AREA.

9. PHYSICAL AND CHEMICAL PROPERTIES

BOILING POINT: > 212 DEG F MELTING POINT: NOT AVAILABLE. FREEZING POINT: UNKNOWN

VAPOR PRESSURE: NOT AVAILABLE. VAPOR DENSITY: HEAVIER THAN AIR SOLUBILITY IN WATER: COMPLETE

Date Printed: 04/16/2014

Page:

Product Code: M-007508

Product Name: FF PREM PLUS GCMI 103 YELLOW (ED.X)

SPECIFIC GRAVITY: 1.20

VOLATILE ORGANIC COMPOUNDS: 0.06 lb/gl

pH: 8.5-9.5

WEIGHT PER GALLON: 9.97 1b/ql VOLATILE WEIGHT PERCENT: 52.71% APPEARANCE: LIQUID, VARIOUS COLORS

ODOR: MILD ACRYLIC ODOR

10. STABILITY AND REACTIVITY

CHEMICAL STABILITY (CONDITIONS TO AVOID): STABLE UNDER NORMAL CONDITIONS OF USE. AVOID EXCESSIVE HEAT OR COLD. AVOID EXCESSIVE AGING BEYOND RECOMMENDED SHELF LIFE.

INCOMPATIBILITY: PRODUCT IS NORMALLY UNREACTIVE. STRONG ACIDS MAY CAUSE PRODUCT TO

HAZARDOUS DECOMPOSITION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED. FUMES WILL CONTAIN CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR.

11. TOXICOLOGICAL INFORMATION

EYE: NO AVAILABLE INFORMATION.

SKIN: NO AVAILABLE INFORMATION.

ORAL: NO AVAILABLE INFORMATION

CHRONIC/CARCINOGENICITY: INFORMATION OBTAINED FROM OUR SUPPLIERS INDICATES THIS PRODUCT IS NOT RATED AS CARCINOGENIC UNDER NORMALLY EXPECTED CONDITIONS OF HANDLING AND USE.

12. ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION: NO AVAILABLE INFORMATION.

13. DISPOSAL CONSIDERATIONS

DISPOSE OF IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS.

14. TRANSPORT INFORMATION (Not all-inclusive)

NOT REGULATED PER U.S. DOT

15. REGULATORY INFORMATION (Not all-inclusive - Selected regulations represented)

SARA 312, SARA 313, and HAP Components:	CAS#	% BY WT.
AMMONIUM HYDROXIDE	1336-21-6	0.68
2-BUTOXYETHANOL (GLYCOL ETHER EB)	111-76-2	0.21

Date Printed: 04/16/2014 Page: 4

Product Code: M-007508

Product Name: FF PREM PLUS GCMI 103 YELLOW (ED.X)

2-(2-ETHOXYETHOXY)-ETHANOL 111-90-0 0.20 ETHANOLAMINE (SKIN AND EYE IRRITANT) 141-43-5 0.01

WARNING: THIS PRODUCT CONTAINS CHEMICAL(S) KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, OR OTHER REPRODUCTIVE HARM.

N/A

16. OTHER INFORMATION

HMIS CODES: H F R P 1 1 0 B

THE INFORMATION GONTAINED HEREIN IS ACCURATE TO THE BEST OF OUR KNOWLEDGE AND BELIEF. . . . HOWEVER, SINCE CONDITIONS OF USE AND HANDLING ARE BEYOND OUR CONTROL, WE MAKE NO GUARANTEE OF RESULTS AND ASSUME NO LIABILITY FOR DAMAGES INCURRED BY USE OF THIS MATERIAL. FINAL DETERMINATION FOR SAFE USE OF THIS PRODUCT IS THE SOLE RESPONSIBLILITY OF THE USER. THE ABOVE DATA IS CONFIDENTIAL, PROPRIETARY INFORMATION OF THE J.M. FRY COMPANY AND IS BEING TRANSMITTED TO ASSIST IN IMPROVING EMPLOYEE OR PUBLIC SAFETY AND HEALTH OR FOR GOVERNMENTAL AGENCY DATA COLLECTION PURPOSES ONLY.

Date Printed: 04/16/2014

Page: 1

Product Code: M-009022

Product Name: SF ST. PATRICK'S GREEN

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product: SF ST. PATRICK'S GREEN

The J.M. Fry Company 4329 Eubank Road, Richmond, VA 23231 Information Phone: 804-236-8100

24-HR EMERGENCY PHONE: CHEMTREC 1-800-262-8200

2. COMPOSITION/INFORMATION ON HAZARDOUS INGREDIENTS

Component/Exposure Limits

CAS#

the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the s

Weight %

N/A

3. HAZARDS IDENTIFICATION

Potential Health Effects

EYES: MAY CAUSE IRRITATION OR BURNING.

SKIN: MAY DRY AND DEFAT SKIN CAUSING IRRITATION AND DERMATITIS AFTER REPEATED EXPOSURE. OTHER AFFECTS OF ABSORPTION ARE UNKNOWN.

INGESTION: INGESTION CAN CAUSE GASTROINTESTINAL IRRITATION AND NAUSEA. THE EXACT NATURE AND INTENSITY OF TOXIC EFFECTS FOLLOWING INGESTION IS UNKNOWN. SEEK MEDICAL ATTENTION.

INHALATION: VAPORS MAY CAUSE HEADACHE OR NAUSEA IN SENSITIVE INDIVIDUALS.

4. FIRST AID MEASURES

EYES: FLUSH WITH WATER OR EYE WASH SOLUTION, INCLUDING UNDER THE EYELIDS, FOR AT LEAST 15 MINUTES. CONTACT A PHYSICIAN IMMEDIATELY.

SKIN: REMOVE CONTAMINATED CLOTHING. WASH THOROUGHLY WITH SOAP AND WATER. IF IRRITATION OCCURS, CONTACT A PHYSICIAN.

INGESTION: GIVE ONE TO TWO GLASSES OF WATER. DO NOT INDUCE VOMITING. CONSULT A PHYSICIAN OR POISON CONTROL CENTER IMMEDIATELY. TREAT SYMPTOMATICALLY.

INHALATION: REMOVE TO FRESH AIR. RESTORE OR SUPPORT BREATHING. CONTACT A PHYSICIAN IF BREATHING DIFFICULTIES OCCUR.

NOTE TO PHYSICIANS: THIS PRODUCT HAS A PH OF 8.5 TO 9.5.

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

Flash Point: >200 DEG F Method: PM CC

Date Printed: 04/16/2014

Page:

2

Product Code: M-009022

Product Name: SF ST. PATRICK'S GREEN

FLAMMABLE LIMITS: (SOLVENT PORTION ONLY, IF APPLICABLE)

Lower flammable limit: N/A Upper flammable limit: N/A

AUTOIGNITION TEMPERATURE: UNKNOWN

HAZARDOUS COMBUSTION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED. FUMES WILL CONTAIN CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

EXTINGUISHING MEDIA: FOAM, ALCOHOL FOAM, CO2, DRY CHEMICAL, WATER, WATER FOG.

FIREFIGHTING INSTRUCTIONS: SELF-CONTAINED BREATHING APPARATUS SHOULD BE WORN TO AVOID INHALATION OF CONCENTRATED VAPORS IN FIRE AREA, USE EXTINGUISHING MEDIA APPROPRIATE FOR SURROUNDING FIRE.

6. AUCIDENTAL RELEASE MEASURES

SMALL SPILL: DIKE TO PREVENT SPREAD USING ABSORBENT MATERIAL OR CHEMICAL DAMS. SCOOP OR PUMP MATERIAL INTO WATER PROOF CONTAINERS FOR DISPOSAL. STAINS MAY BE REMOVED WITH COMMERCIAL STRENGTH SOAP.

The Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Country of the Co

7. HANDLING AND STORAGE

HANDLING: HANDLE ACCORDING TO LABEL INSTRUCTIONS.

STORAGE: THIS PRODUCT HAS BEEN DESIGNED AND PACKAGED FOR INDUSTRIAL USE ONLY! STORE AWAY FROM EXCESSIVE HEAT, COLD OR FREEZING TEMPERATURES. DO NOT TRANSFER TO UNMARKED CONTAINERS, ROTATE STOCK, KEEP CONTAINERS CLOSED WHEN NOT IN USE.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

ENGINEERING CONTROLS: NONE NEEDED UNLESS TLV LIMITS ARE EXCEEDED.

RESPIRATORY PROTECTION: NOT NORMALLY REQUIRED WITH ADEQUATE VENTILATION. IF TLV IS EXCEEDED FOR AIRBORNE MISTS, USE NIOSH APPROVED RESPIRATOR OR SELF CONTAINED BREATHING APPARATUS.

SKIN PROTECTION: CHEMICAL-RESISTANT GLOVES, APRONS, AND COVERALLS RECOMMENDED WHEN MIXING, FILLING, POURING OR CLEANING EQUIPMENT.

EYE PROTECTION: PROTECTIVE GLASSES OR CHEMICAL-RESISTANT SPLASH GOGGLES RECOMMENDED WHEN HANDLING, MAINTAIN EYE WASH FACILITIES IN WORK AREA.

9. PHYSICAL AND CHEMICAL PROPERTIES

BOILING POINT: > 212 DEG F MELTING POINT: NOT AVAILABLE.

FREEZING POINT: UNKNOWN

VAPOR PRESSURE: NOT AVAILABLE. VAPOR DENSITY: HEAVIER THAN AIR SOLUBILITY IN WATER: COMPLETE

Date Printed: 04/16/2014

Page:

Product Code: M-009022

Product Name: SF ST. PATRICK'S GREEN

SPECIFIC GRAVITY: 1.37

VOLATILE ORGANIC COMPOUNDS: 0.08 lb/gl

pH: 8.5-9.5

WEIGHT PER GALLON: 11.41 lb/gl VOLATILE WEIGHT PERCENT: 44.79% APPEARANCE: LIQUID, VARIOUS COLORS

ODOR: MILD ACRYLIC ODOR

10. STABILITY AND REACTIVITY

CHEMICAL STABILITY (CONDITIONS TO AVOID): STABLE UNDER NORMAL CONDITIONS OF USE. AVOID EXCESSIVE HEAT OR COLD. AVOID EXCESSIVE AGING BEYOND RECOMMENDED SHELF LIFE.

INCOMPATIBILITY: PRODUCT IS NORMALLY UNREACTIVE. STRONG ACIDS MAY CAUSE PRODUCT TO

HAZARDOUS DECOMPOSITION PRODUCTS: MAX PRODUCE FUMES WHEN HEATED FUMES WILL CONTAIN CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR.

11. TOXICOLOGICAL INFORMATION

EYE: NO AVAILABLE INFORMATION.

SKIN: NO AVAILABLE INFORMATION.

ORAL: NO AVAILABLE INFORMATION

CHRONIC/CARCINOGENICITY: INFORMATION OBTAINED FROM OUR SUPPLIERS INDICATES THIS PRODUCT IS NOT RATED AS CARCINGGENIC UNDER NORMALLY EXPECTED CONDITIONS OF HANDLING AND USE.

12. ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION: NO AVAILABLE INFORMATION.

13. DISPOSAL CONSIDERATIONS

DISPOSE OF IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS.

14. TRANSPORT INFORMATION (Not all-inclusive)

NOT REGULATED PER U.S. DOT

15. REGULATORY INFORMATION (Not all-inclusive - Selected regulations represented)

SARA 312, SARA 313, and HAP Components:	CAS#	% BY WT.
AMMONIUM HYDROXIDE	1336-21-6	0.42
ETHANOLAMINE (SKIN AND EYE IRRITANT)	141-43-5	0.28

Date Printed: 04/16/2014 Page: 4

Product Code: M-009022

Product Name: SF ST. PATRICK'S GREEN

2-BUTOXYETHANOL (GLYCOL ETHER EB) 111-76-2 0.20 2-(2-ETHOXYETHOXY)-ETHANOL 111-90-0 0.12

WARNING: THIS PRODUCT CONTAINS CHEMICAL(S) KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, OR OTHER REPRODUCTIVE HARM.

N/A

16. OTHER INFORMATION

HMIS CODES: H F R P 1 1 0 B

THE INFORMATION CONTAINED HEREIN IS ACCURATE TO THE BEST OF OUR KNOWLEDGE AND BELIEF. HOWEVER, SINCE CONDITIONS OF USE AND HANDLING ARE BEYOND OUR CONTROL, WE MAKE NO GUARANTEE OF RESULTS AND ASSUME NO LIABILITY FOR DAMAGES INCURRED BY USE OF THIS MATERIAL. FINAL DETERMINATION FOR SAFE USE OF THIS PRODUCT IS THE SOLE RESPONSIBLILITY OF THE USER. THE ABOVE DATA IS CONFIDENTIAL, PROPRIETARY INFORMATION OF THE J.M. FRY COMPANY AND IS BEING TRANSMITTED TO ASSIST IN IMPROVING EMPLOYEE OR PUBLIC SAFETY AND HEALTH OR FOR GOVERNMENTAL AGENCY DATA COLLECTION PURPOSES ONLY.

Date Printed: 04/16/2014

Page: 1

Product Code: M-007506

Product Name: FF PREM PLUS GCMI 21 GREEN (ED.X)

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product: FF PREM PLUS GCMI 21 GREEN (ED.X)

The J.M. Fry Company 4329 Eubank Road, Richmond, VA 23231 Information Phone: 804-236-8100

24-HR EMERGENCY PHONE: CHEMTREC 1-800-262-8200

2. COMPOSITION/INFORMATION ON HAZARDOUS INGREDIENTS

Component/Exposure Limits

CAS#

Weight %

N/A

3. HAZARDS IDENTIFICATION

Potential Health Effects

EYES: MAY CAUSE IRRITATION OR BURNING

SKIN: MAY DRY AND DEFAT SKIN CAUSING IRRITATION AND DERMATITIS AFTER REPEATED EXPOSURE. OTHER AFFECTS OF ABSORPTION ARE UNKNOWN.

AND THE PERSON AND PARTY AND PARTY.

INGESTION: INGESTION CAN CAUSE GASTROINTESTINAL IRRITATION AND NAUSEA. THE EXACT NATURE AND INTENSITY OF TOXIC EFFECTS FOLLOWING INGESTION IS UNKNOWN. SEEK MEDICAL ATTENTION.

INHALATION: VAPORS MAY CAUSE HEADACHE OR NAUSEA IN SENSITIVE INDIVIDUALS.

4. FIRST AID MEASURES

EYES: FLUSH WITH WATER OR EYE WASH SOLUTION, INCLUDING UNDER THE EYELIDS, FOR AT LEAST 15 MINUTES. CONTACT A PHYSICIAN IMMEDIATELY.

SKIN: REMOVE CONTAMINATED CLOTHING. WASH THOROUGHLY WITH SOAP AND WATER. IF IRRITATION OCCURS, CONTACT A PHYSICIAN.

INGESTION: GIVE ONE TO TWO GLASSES OF WATER, DO NOT INDUCE VOMITING, CONSULT A PHYSICIAN OR POISON CONTROL CENTER IMMEDIATELY. TREAT SYMPTOMATICALLY.

INHALATION: REMOVE TO FRESH AIR. RESTORE OR SUPPORT BREATHING. CONTACT A PHYSICIAN IF BREATHING DIFFICULTIES OCCUR.

NOTE TO PHYSICIANS: THIS PRODUCT HAS A PH OF 8.5 TO 9.5.

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

Flash Point: >200 DEG F

Method: PM CC

Date Printed: 04/16/2014

Page:

and the second second in the second second

Product Code: M-007506

Product Name: FF PREM PLUS GCMI 21 GREEN (ED. X)

FLAMMABLE LIMITS: (SOLVENT PORTION ONLY, IF APPLICABLE)

Lower flammable limit: N/A Upper flammable limit: N/A

AUTOIGNITION TEMPERATURE: UNKNOWN

HAZARDOUS COMBUSTION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED. FUMES WILL CONTAIN CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

EXTINGUISHING MEDIA: FOAM, ALCOHOL FOAM, CO2, DRY CHEMICAL, WATER, WATER FOG.

FIREFIGHTING INSTRUCTIONS: SELF-CONTAINED BREATHING APPARATUS SHOULD BE WORN TO AVOID INHALATION OF CONCENTRATED VAPORS IN FIRE AREA. USE EXTINGUISHING MEDIA APPROPRIATE FOR SURROUNDING FIRE.

6. ACCIDENTAL RELEASE MEASURES

SMALL SPILL: DIKE TO PREVENT SPREAD USING ABSORBENT MATERIAL OR CHEMICAL DAMS. SCOOP OR PUMP MATERIAL INTO WATER PROOF CONTAINERS FOR DISPOSAL. STAINS MAY BE REMOVED WITH COMMERCIAL STRENGTH SOAP.

7. HANDLING AND STORAGE

HANDLING: HANDLE ACCORDING TO LABEL INSTRUCTIONS.

STORAGE: THIS PRODUCT HAS BEEN DESIGNED AND PACKAGED FOR INDUSTRIAL USE ONLY! STORE AWAY FROM EXCESSIVE HEAT, COLD OR FREEZING TEMPERATURES. DO NOT TRANSFER TO UNMARKED CONTAINERS. ROTATE STOCK. KEEF CONTAINERS CLOSED WHEN NOT IN USE.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

ENGINEERING CONTROLS: NONE NEEDED UNLESS TLV LIMITS ARE EXCEEDED.

RESPIRATORY PROTECTION: NOT NORMALLY REQUIRED WITH ADEQUATE VENTILATION. IF TLV IS EXCEEDED FOR AIRBORNE MISTS, USE NIOSH APPROVED RESPIRATOR OR SELF CONTAINED BREATHING APPARATUS.

SKIN PROTECTION: CHEMICAL-RESISTANT GLOVES, APRONS, AND COVERALLS RECOMMENDED WHEN MIXING, FILLING, POURING OR CLEANING EQUIPMENT.

EYE PROTECTION: PROTECTIVE GLASSES OR CHEMICAL-RESISTANT SPLASH GOGGLES RECOMMENDED WHEN HANDLING. MAINTAIN EYE WASH FACILITIES IN WORK AREA.

9. PHYSICAL AND CHEMICAL PROPERTIES

BOILING POINT: > 212 DEG F MELTING POINT: NOT AVAILABLE.

FREEZING POINT: UNKNOWN

VAPOR PRESSURE: NOT AVAILABLE. VAPOR DENSITY: HEAVIER THAN AIR SOLUBILITY IN WATER: COMPLETE

Date Printed: 04/16/2014

Page: 3

Product Code: M-007506

Product Name: FF PREM PLUS GCMI 21 GREEN (ED.X)

SPECIFIC GRAVITY: 1.21

VOLATILE ORGANIC COMPOUNDS: 0.06 lb/gl

pH: 8,5-9,5

WEIGHT PER GALLON: 10.05 lb/gl VOLATILE WEIGHT PERCENT: 51.39% APPEARANCE: LIQUID, VARIOUS COLORS

ODOR: MILD ACRYLIC ODOR

10. STABILITY AND REACTIVITY

CHEMICAL STABILITY (CONDITIONS TO AVOID): STABLE UNDER NORMAL CONDITIONS OF USE. AVOID EXCESSIVE HEAT OR COLD. AVOID EXCESSIVE AGING BEYOND RECOMMENDED SHELF LIFE.

INCOMPATIBILITY: PRODUCT IS NORMALLY UNREACTIVE. STRONG ACIDS MAY CAUSE PRODUCT TO GEL.

HAZARDOUS DECOMPOSITION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED FUMES WILL CONTAIN CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR.

11. TOXICOLOGICAL INFORMATION

EYE: NO AVAILABLE INFORMATION.

SKIN: NO AVAILABLE INFORMATION.

ORAL: NO AVAILABLE INFORMATION

CHRONIC/CARCINOGENICITY: INFORMATION OBTAINED FROM OUR SUPPLIERS INDICATES THIS PRODUCT IS NOT RATED AS CARCINOGENIC UNDER NORMALLY EXPECTED CONDITIONS OF HANDLING AND USE.

12. ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION: NO AVAILABLE INFORMATION.

13. DISPOSAL CONSIDERATIONS

DISPOSE OF IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS.

14. TRANSPORT INFORMATION (Not all-inclusive)

NOT REGULATED PER U.S. DOT

15. REGULATORY INFORMATION (Not all-inclusive - Selected regulations represented)

SARA 312, SARA 313, and HAP Components:	CAS#	% BY WT.
AMMONIUM HYDROXIDE	1336-21-6	0.68
2-BUTOXYETHANOL (GLYCOL ETHER EB)	111-76-2	0.23

Date Printed: 04/16/2014 Page: 4

Product Code: M-007506

Product Name: FF PREM PLUS GCMI 21 GREEN (ED.X)

2-(2-ETHOXYETHOXY)-ETHANOL 111-90-0 0.20 ETHANOLAMINE (SKIN AND EYE IRRITANT) 141-43-5 0.01

WARNING: THIS PRODUCT CONTAINS CHEMICAL(S) KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, OR OTHER REPRODUCTIVE HARM.

N/A

16. OTHER INFORMATION

HMIS CODES: H F R P 1 1 0 B

THE INFORMATION CONTAINED HEREIN IS ACCURATE TO THE BEST OF OUR KNOWLEDGE AND BELIEF.

HOWEVER, SINCE CONDITIONS OF USE AND HANDLING ARE BEYOND OUR CONTROL, WE MAKE NO GUARANTEE OF RESULTS AND ASSUME NO LIABILITY FOR DAMAGES INCURRED BY USE OF THIS MATERIAL, FINAL DETERMINATION FOR SAFE USE OF THIS PRODUCT IS THE SOLE RESPONSIBLILITY OF THE USER. THE ABOVE DATA IS CONFIDENTIAL, PROPRIETARY INFORMATION OF THE J.M. FRY COMPANY AND IS BEING TRANSMITTED TO ASSIST IN IMPROVING EMPLOYEE OR PUBLIC SAFETY AND HEALTH OR FOR GOVERNMENTAL AGENCY DATA COLLECTION PURPOSES ONLY.

Date Printed: 04/16/2014

Page: 1

Product Code: M-009025

Product Name: SF PHILLIPS BLUE

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product: SF PHILLIPS BLUE

The J.M. Fry Company 4329 Eubank Road, Richmond, VA 23231 Information Phone: 804-236-8100

24-HR EMERGENCY PHONE: CHEMTREC 1-800-262-8200

2. COMPOSITION/INFORMATION ON HAZARDOUS INGREDIENTS

Component/Exposure Limits

CAS#

Weight %

N/A

3. HAZARDS IDENTIFICATION

Potential Health Effects

EYES: MAY CAUSE IRRITATION OR BURNING.

SKIN: MAY DRY AND DEFAT SKIN CAUSING IRRITATION AND DERMATITIS AFTER REPEATED EXPOSURE. OTHER AFFECTS OF ABSORPTION ARE UNKNOWN.

I be a second or an analysis of the second o

INGESTION: INGESTION CAN CAUSE GASTROINTESTINAL IRRITATION AND NAUSEA. THE EXACT NATURE AND INTENSITY OF TOXIC EFFECTS FOLLOWING INGESTION IS UNKNOWN. SEEK MEDICAL ATTENTION.

INHALATION: VAPORS MAY CAUSE HEADACHE OR NAUSEA IN SENSITIVE INDIVIDUALS.

4. FIRST AID MEASURES

EYES: FLUSH WITH WATER OR EYE WASH SOLUTION, INCLUDING UNDER THE EYELIDS, FOR AT LEAST 15 MINUTES. CONTACT A PHYSICIAN IMMEDIATELY.

SKIN: REMOVE CONTAMINATED CLOTHING. WASH THOROUGHLY WITH SOAP AND WATER. IF IRRITATION OCCURS, CONTACT A PHYSICIAN.

INGESTION: GIVE ONE TO TWO GLASSES OF WATER. DO NOT INDUCE VOMITING. CONSULT A PHYSICIAN OR POISON CONTROL CENTER IMMEDIATELY. TREAT SYMPTOMATICALLY.

INHALATION: REMOVE TO FRESH AIR. RESTORE OR SUPPORT BREATHING. CONTACT A PHYSICIAN IF BREATHING DIFFICULTIES OCCUR.

NOTE TO PHYSICIANS: THIS PRODUCT HAS A PH OF 8.5 TO 9.5.

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

Flash Point: >200 DEG F

Method: PM CC

Date Printed: 04/16/2014

Page:

and the state and amount the state of a

Product Code: M-009025

Product Name: SF PHILLIPS BLUE

FLAMMABLE LIMITS: (SOLVENT PORTION ONLY, IF APPLICABLE)

Lower flammable limit: N/A Upper flammable limit: N/A

AUTOIGNITION TEMPERATURE: UNKNOWN

HAZARDOUS COMBUSTION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED. FUMES WILL CONTAIN CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

EXTINGUISHING MEDIA: FOAM, ALCOHOL FOAM, CO2, DRY CHEMICAL, WATER, WATER FOG.

FIREFIGHTING INSTRUCTIONS: SELF-CONTAINED BREATHING APPARATUS SHOULD BE WORN TO AVOID INHALATION OF CONCENTRATED VAPORS IN FIRE AREA. USE EXTINGUISHING MEDIA APPROPRIATE FOR SURROUNDING FIRE.

6. ACCIDENTAL RELEASE MEASURES

SMALL SPILL: DIKE TO PREVENT SPREAD USING ABSORBENT MATERIAL OR CHEMICAL DAMS. SCOOP OR PUMP MATERIAL INTO WATER PROOF CONTAINERS FOR DISPOSAL. STAINS MAY BE REMOVED WITH COMMERCIAL STRENGTH SOAP.

7. HANDLING AND STORAGE

HANDLING: HANDLE ACCORDING TO LABEL INSTRUCTIONS.

STORAGE: THIS PRODUCT HAS BEEN DESIGNED AND PACKAGED FOR INDUSTRIAL USE ONLY! STORE AWAY FROM EXCESSIVE HEAT, COLD OR FREEZING TEMPERATURES. DO NOT TRANSFER TO UNMARKED CONTAINERS. ROTATE STOCK. KEEP CONTAINERS CLOSED WHEN NOT IN USE.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

ENGINEERING CONTROLS: NONE NEEDED UNLESS TLV LIMITS ARE EXCEEDED.

RESPIRATORY PROTECTION: NOT NORMALLY REQUIRED WITH ADEQUATE VENTILATION. IF TLV IS EXCEEDED FOR AIRBORNE MISTS, USE NIOSH APPROVED RESPIRATOR OR SELF CONTAINED BREATHING APPARATUS.

SKIN PROTECTION: CHEMICAL-RESISTANT GLOVES, APRONS, AND COVERALLS RECOMMENDED WHEN MIXING, FILLING, POURING OR CLEANING EQUIPMENT.

EYE PROTECTION: PROTECTIVE GLASSES OR CHEMICAL-RESISTANT SPLASH GOGGLES RECOMMENDED WHEN HANDLING. MAINTAIN EYE WASH FACILITIES IN WORK AREA.

9. PHYSICAL AND CHEMICAL PROPERTIES

BOILING POINT: > 212 DEG F MELTING POINT: NOT AVAILABLE.

FREEZING POINT: UNKNOWN

VAPOR PRESSURE: NOT AVAILABLE.
VAPOR DENSITY: HEAVIER THAN AIR
SOLUBILITY IN WATER: COMPLETE

Date Printed: 04/16/2014

Page: 3

Product Code: M-009025

Product Name: SF PHILLIPS BLUE

SPECIFIC GRAVITY: 1.34

VOLATILE ORGANIC COMPOUNDS: 0.09 lb/gl

pH: 8.5-9.5

WEIGHT PER GALLON: 11,16 lb/gl VOLATILE WEIGHT PERCENT: 45,10% APPEARANCE: LIQUID, VARIOUS COLORS

ODOR: MILD ACRYLIC ODOR

10. STABILITY AND REACTIVITY

CHEMICAL STABILITY (CONDITIONS TO AVOID): STABLE UNDER NORMAL CONDITIONS OF USE. AVOID EXCESSIVE HEAT OR COLD. AVOID EXCESSIVE AGING BEYOND RECOMMENDED SHELF LIFE.

INCOMPATIBILITY: PRODUCT IS NORMALLY UNREACTIVE. STRONG ACIDS MAY CAUSE PRODUCT TO GEL.

MAZARDOUS DECOMPOSITION PRODUCTS: MAY PRODUCE FUMES WHEN HEATED. FUMES WILL CONTAIN CARBON MONOXIDE, CARBON DIOXIDE AND VARIOUS OTHER DECOMPOSITION PRODUCTS. ALL DECOMPOSITION PRODUCTS ARE NOT KNOWN.

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR.

11. TOXICOLOGICAL INFORMATION

EYE: NO AVAILABLE INFORMATION.

SKIN: NO AVAILABLE INFORMATION.

ORAL: NO AVAILABLE INFORMATION

CHRONIC/CARCINOGENICITY: INFORMATION OBTAINED FROM OUR SUPPLIERS INDICATES THIS PRODUCT IS NOT RATED AS CARCINOGENIC UNDER NORMALLY EXPECTED CONDITIONS OF HANDLING AND USE.

12. ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL INFORMATION: NO AVAILABLE INFORMATION.

13. DISPOSAL CONSIDERATIONS

DISPOSE OF IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS.

14. TRANSPORT INFORMATION (Not all-inclusive)

NOT REGULATED PER U.S. DOT

15. REGULATORY INFORMATION (Not all-inclusive - Selected regulations represented)

SARA 312, SARA 313, and HAP Components:	CAS#	% BY WT.
AMMONIUM HYDROXIDE	1336-21-6	0.39
ETHANOLAMINE (SKIN AND EYE IRRITANT)	141-43-5	0.31

Date Printed: 04/16/2014 Page: 4

Product Code: M-009025

Product Name: SF PHILLIPS BLUE

2-BUTOXYETHANOL (GLYCOL ETHER EB) 111-76-2 0.23 2-(2-ETHOXYETHOXY)-ETHANOL 111-90-0 0.12

WARNING: THIS PRODUCT CONTAINS CHEMICAL(S) KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, OR OTHER REPRODUCTIVE HARM.

N/A

16. OTHER INFORMATION

HMIS CODES: H F R P

THE IMPORMATION CONTAINED HEREIN IS ACCURATE TO THE BEST OF OUR KNOWLEDGE AND BELIEF. HOWEVER, SINCE CONDITIONS OF USE AND HANDLING ARE BEYOND OUR CONTROL, WE MAKE NO GUARANTEE OF RESULTS AND ASSUME NO LIABILITY FOR DAMAGES INCURRED BY USE OF THIS MATERIAL. FINAL DETERMINATION FOR SAFE USE OF THIS PRODUCT IS THE SOLE RESPONSIBILITY OF THE USER. THE ABOVE DATA IS CONFIDENTIAL, PROPRIETARY INFORMATION OF THE J.M. FRY COMPANY AND IS BEING TRANSMITTED TO ASSIST IN IMPROVING EMPLOYEE OR PUBLIC SAFETY AND HEALTH OR FOR GOVERNMENTAL AGENCY DATA COLLECTION PURPOSES ONLY.

Specialty Adhesives & Coatings, Inc.

P.O. BOX 18445, Memphis, TN 38181 — 3777 Air Park, Memphis, TN 38118 TELEPHONE: 901-794-8556

24-HOUR EMERGENCY CONTACT NUMBER: 1-800-728-9171

MATERIAL SAFETY DATA SHEET HOT MELT ADHESIVES

SECTION I

PRODUCT CLASS:

Hot Melt Adhesives

MANUFACTURER'S CODES:

HM 962

SECTION II - HAZARDOUS INGREDIENTS

NONE

NON-HAZARDOUS INGREDIENTS - 0 - 100%

SECTION III - PHYSICAL DATA

BOILING POINT - N/A

SPECIFIC GRAVITY - 0.92

VAPOR PRESSURE - N/A

MELTING POINT - 190 – 230

VAPOR DENSITY - N/A

EVAPORATION RATE - N/A

SOLUBILITY IN WATER - INSOLUBLE

APPEARANCE AND ODOR - AMBER AND LOW ODOR

SECTION IV - FIRE AND EXPLOSION HAZARD DATA

DOT CATEGORY - NON FLAMMABLE EXTINGUISHING MEDIA - CO₂

FLASH POINT - 450F

SPECIAL FIRE FIGHTING PROCEDURES - NONE UNUSUAL FIRE AND EXPLOSION HAZARDS - NONE

SECTION V - HEALTH HAZARD DATA

MAIN ROUTE OF ENTRY - INHALATION
TARGET ORGANS - SKIN COULD BE SEVERELY DAMAGED FROM CONTACT WITH
MOLTEN MATERIAL.
HEALTH HAZARDS (ACUTE AND CHRONIC) - NONE

FIRST AID:

COOL AFFECTED AREA IMMEDIATELY, OBTAIN MEDICAL ASSISTANCE. DO NOT ATTEMPT TO REMOVE COOLED ADHESIVE FROM AFFECTED SKIN AS SEVERE DAMAGE COULD RESULT.

SECTION VI - REACTIVITY DATA

STABILITY - STABLE
HAZARDOUS DECOMPOSITION OR BY-PRODUCTS - CARBON MONOXIDE
CONDITIONS TO AVOID - TEMPERATURES OVER 400F MAY CAUSE RESIN
DEGRADATION
HAZARDOUS POLYMERIZATION - CANNOT OCCUR

SECTION VII - SPILL OR LEAK PROCEDURES

SPILL - SWEEP UP MATERIAL, ALLOW MOLTEN SPILLS TO COOL BEFORE SCRAPING UP AND DISPOSING.
WASTE DISPOSAL METHOD - IN ACCORDANCE WITH LOCAL REGULATIONS

SECTION VIII - PROTECTIVE EQUIPMENT TO BE USED

VENTILATION - YES. DO NOT USE IN CONFINED SPACES.
PROTECTIVE GLOVES - YES
EYE PROTECTION - YES

SECTION IX - PRECAUTIONS OR OTHER COMMENTS

STORAGE AND HANDLING - STORE IN COOL DRY PLACE, OPTIMUM TEMPERATURE 70 F.

SECTION X - OTHER COMMENTS

NFPA Hazard Classification

Health: 1 Flammability: 1 Reactivity: 0 Special Hazards: None







Safety Data Sheet

1 - Identification

Product Name: WD-40 Multi-Use Product Aerosol NOT FOR SALE IN CALIFORNIA

Product Use: Lubricant, Penetrant, Drives Out Moisture, Removes and Protects Surfaces From

Corrosion

Restrictions on Use: None identified

SDS Date Of Preparation: 07/20/2014

Manufacturer: WD-40 Company

Address: 1061 Cudahy Place (92110)

P.O. Box 80607

San Diego, California, USA

92138 -0607

Telephone:

Emergency only: 1-888-324-7596 (PROSAR)

Information: 1-888-324-7596

Chemical Spills: 1-800-424-9300 (Chemtrec) 1-703-527-3887 (International Calls)

2 – Hazards Identification

Hazcom 2012/GHS Classification:

Flammable Aerosol Category 1

Gas Under Pressure: Compressed Gas

Aspiration Toxicity Category 1

Note: This product is a consumer product and is labeled in accordance with the US Consumer Product Safety Commission regulations which take precedence over OSHA Hazard Communication labeling. The actual container label will not include the label elements below. The labeling below applies to industrial/professional products.

Label Elements:







DANGER!

Extremely Flammable Aerosol.

Contains gas under pressure; may explode if heated.

May be fatal if swallowed and enters airways.

Prevention

Keep away from heat, sparks, open flames, hot surfaces - No smoking.

Do not spray on an open flame or other ignition source.

Pressurized container: Do not pierce or burn, even after use.

Response

IF SWALLOWED: Immediately call a POISON CENTER or physician. Do NOT induce vomiting.

Storage

Store locked up.

Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Store in a well-ventilated place.

Disposal

Dispose of contents and container in accordance with local and national regulations.

3 - Composition/Information on Ingredients

Ingredient	CAS#	Weight Percent	US Hazcom 2012/ GHS Classification
Aliphatic Hydrocarbon	64742-47-8	45-50	Flammable Liquid Category 3

			Aspiration Toxicity Category 1
Petroleum Base Oil	64742-56-9	<25	Not Hazardous
	64742-65-0		
	64742-53-6		
	64742-54-7		
	64742-71-8		
LVP Aliphatic Hydrocarbon	64742-47-8	12-18	Aspiration Toxicity Category 1
Carbon Dioxide	124-38-9	2-3	Simple Asphyxiant
			Gas Under Pressure,
			Compressed Gas
Non-Hazardous Ingredients	Mixture	<10	Not Hazardous

Note: The exact percentages are a trade secret.

4 - First Aid Measures

Ingestion (Swallowed): Aspiration Hazard. DO NOT induce vomiting. Call physician, poison control center or the WD-40 Safety Hotline at 1-888-324-7596 immediately.

Eye Contact: Flush thoroughly with water. Remove contact lenses if present after the first 5 minutes and continue flushing for several more minutes. Get medical attention if irritation persists.

Skin Contact: Wash with soap and water. If irritation develops and persists, get medical attention.

Inhalation (Breathing): If irritation is experienced, move to fresh air. Get medical attention if irritation or other symptoms develop and persist.

Signs and Symptoms of Exposure: May cause eye and respiratory irritation. Inhalation may cause coughing, headache and dizziness. Skin contact may cause drying of the skin.

Indication of Immediate Medical Attention/Special Treatment Needed: Immediate medical attention is needed for ingestion.

5 - Fire Fighting Measures

Suitable (and unsuitable) Extinguishing Media: Use water fog, dry chemical, carbon dioxide or foam. Do not use water jet or flooding amounts of water. Burning product will float on the surface and spread fire. **Specific Hazards Arising from the Chemical**: Contents under pressure. Keep away from ignition sources and open flames. Exposure of containers to extreme heat and flames can cause them to rupture often with violent force. Vapors are heavier than air and may travel along surfaces to remote ignition sources and flash back. Combustion will produce oxides of carbon and hydrocarbons.

Special Protective Equipment and Precautions for Fire-Fighters: Firefighters should always wear positive pressure self-contained breathing apparatus and full protective clothing. Cool fire-exposed containers with water. Use shielding to protect against bursting containers.

6 - Accidental Release Measures

Personal Precautions, Protective Equipment and Emergency Procedures: Wear appropriate protective clothing (see Section 8). Eliminate all sources of ignition and ventilate area.

Methods and Materials for Containment/Cleanup: Leaking cans should be placed in a plastic bag or open pail until the pressure has dissipated. Contain and collect liquid with an inert absorbent and place in a container for disposal. Clean spill area thoroughly. Report spills to authorities as required.

7 – Handling and Storage

Precautions for Safe Handling: Avoid contact with eyes. Avoid prolonged contact with skin. Avoid breathing vapors or aerosols. Use only with adequate ventilation. Keep away from heat, sparks, pilot lights, hot surfaces and open flames. Unplug electrical tools, motors and appliances before spraying or bringing the can near any source of electricity. Electricity can burn a hole in the can and cause contents to burst into flames. To avoid serious burn injury, do not let the can touch battery terminals, electrical connections on motors or appliances or any other source of electricity. Wash thoroughly with soap and water after handling. Keep containers closed when not in use. Keep out of the reach of children. Do not puncture, crush or incinerate containers, even when empty.

Conditions for Safe Storage: Store in a cool, well-ventilated area, away from incompatible materials Do not store above 120°F or in direct sunlight. U.F.C (NFPA 30B) Level 3 Aerosol. Store away from oxidizers.

8 - Exposure Controls/Personal Protection

Chemical	Occupational Exposure Limits
Aliphatic Hydrocarbon	1200 mg/m3 TWA (manufacturer recommended)
Petroleum Base Oil	5 mg/m3 TWA, 10 mg/m3 STEL ACGIH TLV 5 mg/m3 TWA OSHA PEL
LVP Aliphatic Hydrocarbon	1200 mg/m3 TWA (manufacturer recommended)
Carbon Dioxide	5000 ppm TWA (OSHA/ACGIH), 30,000 ppm STEL (ACGIH)
Non-Hazardous Ingredients	None Established

The Following Controls are Recommended for Normal Consumer Use of this Product

Appropriate Engineering Controls: Use in a well-ventilated area.

Personal Protection:

Eye Protection: Avoid eye contact. Always spray away from your face.

Skin Protection: Avoid prolonged skin contact. Chemical resistant gloves recommended for operations

where skin contact is likely.

Respiratory Protection: None needed for normal use with adequate ventilation.

For Bulk Processing or Workplace Use the Following Controls are Recommended

Appropriate Engineering Controls: Use adequate general and local exhaust ventilation to maintain exposure levels below that occupational exposure limits.

Personal Protection:

Eye Protection: Safety goggles recommended where eye contact is possible.

Skin Protection: Wear chemical resistant gloves.

Respiratory Protection: None required if ventilation is adequate. If the occupational exposure limits are exceeded, wear a NIOSH approved respirator. Respirator selection and use should be based on contaminant type, form and concentration. Follow OSHA 1910.134, ANSI Z88.2 and good Industrial Hygiene practice.

Work/Hygiene Practices: Wash with soap and water after handling.

9 - Physical and Chemical Properties

Appearance:	Light amber liquid	Flammable Limits: (Solvent Portion)	LEL: 0.6% UEL: 8%
Odor:	Mild petroleum odor	Vapor Pressure:	95-115 PSI @ 70°F
Odor Threshold:	Not established	Vapor Density:	Greater than 1 (air=1)
pH:	Not Applicable	Relative Density:	0.8 – 0.82 @ 60°F
Melting/Freezing Point	Not established	Solubilities:	Insoluble in water
Boiling Point/Range:	361 - 369°F (183 - 187°C)	Partition Coefficient; n-octanol/water:	Not established
Flash Point:	122°F (49°C) Tag Closed Cup (concentrate)	Autoignition Temperature:	Not established
Evaporation Rate:	Not established	Decomposition Temperature:	Not established
Flammability (solid, gas)	Flammable Aerosol	Viscosity:	2.79-2.96 cSt @ 100°F
VOC:	412 grams/liter (49.5%)	Pour Point:	-63°C (-81.4°F) ASTM D-97

10 - Stability and Reactivity

Reactivity: Not reactive under normal conditions

Chemical Stability: Stable

Possibility of Hazardous Reactions: May react with strong oxidizers generating heat.

Conditions to Avoid: Avoid heat, sparks, flames and other sources of ignition. Do not puncture or incinerate

containers.

Incompatible Materials: Strong oxidizing agents.

Hazardous Decomposition Products: Carbon monoxide and carbon dioxide.

11 – Toxicological Information

Symptoms of Overexposure:

Inhalation: High concentrations may cause nasal and respiratory irritation and central nervous system effects such as headache, dizziness and nausea. Intentional abuse may be harmful or fatal.

Skin Contact: Prolonged and/or repeated contact may produce mild irritation and defatting with possible dermatitis.

Eye Contact: Contact may be irritating to eyes. May cause redness and tearing.

Ingestion: This product has low oral toxicity. Swallowing may cause gastrointestinal irritation, nausea, vomiting and diarrhea. This product is an aspiration hazard. If swallowed, can enter the lungs and may cause chemical pneumonitis, severe lung damage and death.

Chronic Effects: None expected.

Carcinogen Status: None of the components are listed as a carcinogen or suspect carcinogen by IARC,

NTP, ACGIH or OSHA.

Reproductive Toxicity: None of the components is considered a reproductive hazard.

Numerical Measures of Toxicity:

The oral toxicity of this product is estimated to be greater than 5,000 mg/kg and the dermal toxicity greater than 2,000 mg/kg based on an assessment of the ingredients. This product is not classified as toxic by established criteria. It is an aspiration hazard.

12 - Ecological Information

Ecotoxicity: No specific aquatic toxicity data is currently available, however components of this product are not expected to be harmful to aquatic organisms

Persistence and Degradability: Component are readily biodegradable.

Bioaccumulative Potential: Bioaccumulation is not expected based on an assessment of the ingredients.

Mobility in Soil: No data available Other Adverse Effects: None known

13 - Disposal Considerations

If this product becomes a waste, it would be expected to meet the criteria of a RCRA ignitable hazardous waste (D001). However, it is the responsibility of the generator to determine at the time of disposal the proper classification and method of disposal. Do not puncture or incinerate containers, even empty. Dispose in accordance with federal, state, and local regulations.

14 - Transportation Information_

DOT Surface Shipping Description:

UN1950, Aerosols, 2.1 Ltd. Qty (Note: Shipping Papers are not required for Limited Quantities unless transported by air or vessel – each package must be marked with the Limited Quantity Mark)

IMDG Shipping Description: Un1950, Aerosols, 2.1, LTD QTY

ICAO Shipping Description: UN1950, Aerosols, flammable, 2.1 NOTE: WD-40 does not test aerosol cans to assure that they meet the pressure and other requirements for transport by air. We do not recommend that our aerosol products be transported by air.

15 – Regulatory Information

U.S. Federal Regulations:

CERCLA 103 Reportable Quantity: This product is not subject to CERCLA reporting requirements, however, oil spills are reportable to the National Response Center under the Clean Water Act and many

states have more stringent release reporting requirements. Report spills required under federal, state and local regulations.

SARA TITLE III:

Hazard Category For Section 311/312: Acute Health, Fire Hazard, Sudden Release of Pressure **Section 313 Toxic Chemicals**: This product contains the following chemicals subject to SARA Title III Section 313 Reporting requirements: None

Section 302 Extremely Hazardous Substances (TPQ): None

EPA Toxic Substances Control Act (TSCA) Status: All of the components of this product are listed on the TSCA inventory.

VOC Regulations: This product complies with the consumer product VOC limits of the US EPA and states adopting the OTC VOC rules but does not comply with CARB.

California Safe Drinking Water and Toxic Enforcement Act (Proposition 65): This product does not contain chemicals regulated under California Proposition 65.

Canadian Environmental Protection Act: One of the components is listed on the NDSL. All of the other ingredients are listed on the Canadian Domestic Substances List or exempt from notification.

Canadian WHMIS Classification: Class A (Compressed gas), Class B-5 (Flammable Aerosol)

This MSDS has been prepared according to the criteria of the Controlled Products Regulation (CPR) and the MSDS contains all of the information required by the CPR.

16 - Other Information:

HMIS Hazard Rating:

Health - 1 (slight hazard), Fire Hazard - 4 (severe hazard), Reactivity - 0 (minimal hazard)

Revision Date: July 20, 2014 Supersedes: May 23, 2014

Revision Summary: Convert to Hazcom 2012. Changes in all sections.

Prepared by: Industrial Health & Safety Consultants, Inc. Shelton, CT, USA

APPROVED By: I. Kowalski Regulatory Affairs Dept.

5049000/No.0015205



GAF Safety Data Sheet SDS # 1049

SDS Date: December 2013

SECTION 1: PRODUCT AND COMPANY INFORMATION

PRODUCT NAME: TOPCOAT® MB Plus

TRADE NAME: N/A

CHEMICAL NAME /

SYNONYM:

N/A

CHEMICAL FAMILY: N/A

MANUFACTURER: GAF

ADDRESS: 1 Campus Drive, Parsippany, NJ 07054

24-HOUR EMERGENCY

PHONE (CHEMTREC): 800 – 424 – 9300

INFORMATION ONLY: 800 – 766 – 3411

PREPARED BY: Corporate EHS

APPROVED BY: Corporate EHS

SECTION 2: HAZARDS IDENTIFICATION

NFPA and HMIS RATINGS:

	NFPA Hazard Rating		HMIS Hazard Rating
Health	2	Health	2
Flammable	0	Flammable	0
Reactive	0	Reactive	0
Special Hazards	<u>-</u>	Personal Protection	X

GHS LABEL ELEMENTS:

GHS CLASSIFICATION:

Eye Irritant - Category 2A Skin Irritant - Category 2 Carcinogenicity - Category 2 Target Organ (SE) - Category 3 Target Organ (RE) - Category 1

Hazardous to the Aquatic Environment (chronic) - Category 4

GHS PICTOGRAMS:







SIGNAL WORD: Danger

HAZARD Flammable liquid and vapor

STATEMENTS: Harmful if inhaled

May cuase respiratory irritation

May cause damage to organs through prolonged or repeated exposure

Causes skin irritation
Causes severe eye irritation
Suspected of causing cancer

May be toxic to aquatic life with long lasting effects

ADDITIONAL HAZARD IDENTIFICATION INFORMATION:

PRIMARY ROUTE OF EXPOSURE: Inhalation, Skin Contact, Eye Contact

SIGNS & SYMPTOMS OF EXPOSURE

EYES: Exposure to vapors can cause irritation to the eyes.

SKIN: Slight irritation of the skin. Prolonged contact can cause reddening

of the skin.

INGESTION: Not expected to be ingested.

INHALATION: Vapors or mists can cause mental sluggishness, irritation of nasal

passages, throat and lungs. Can cause headaches.

ACUTE HEALTH HAZARDS: Excessive exposure can cause pulmonary edema.

CHRONIC HEALTH HAZARDS: None known.

CARCINOGENICITY: IARC has determined that occupational exposure to Titanium

Dioxide is possibly carcinogenic to humans (Group 2B). IARC concluded lung tumors were observed in rats following high dose exposure by inhalation and in female rats exposed by intra-tracheal instillation. Other studies have shown no tumors in rats following inhalation exposure and no tumors in mice or rats following oral

exposure.

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

			OCCUPATIONAL EXPOSURE LIMITS		
CHEMICAL NAME	CAS#	% (BY WT)	OSHA	ACGIH	OTHER
Aluminum Trihydrate	21645-51-2	25 – 35	5 mg/m3 – resp. 15 mg/m3 – total	3 mg/m3 – resp. 10 mg/m3 – total	REL: 5 mg/m3 – resp., 10 mg/m3 – total

Titanium Dioxide	13463-67-7	2 – 10	15 mg/m3 – total	10 mg/m3 – total	REL: lowest feasible concentration
Zinc Borate	138265-88-0	2 – 10	5 mg/m3 – resp. 15 mg/m3 – total	3 mg/m3 – resp. 10 mg/m3 – total	REL: 5 mg/m3 – resp., 10 mg/m3 – total
Non-hazardous ingredients	-	50 – 60			

NE = Not Established

SECTION 4: FIRST AID MEASRURES

FIRST AID PROCEDURES

EYES: Flush eyes with water for 15 minutes. If irritation persists, call a

physician.

SKIN: Wash contaminated skin with soap and water.

INHALATION: Remove patient to an area that has fresh air. If breathing has stopped,

administer artificial respiration. Contact physician immediately.

INGESTION: If patient is awake, induce vomiting by giving 2 glasses of water and

pressing down at back of throat. Call physician immediately. Never give

anything by mouth to an unconscious person.

NOTES TO PHYSICIANS OR FIRST AID PROVIDERS:

None known.

SECTION 5: FIRE FIGHTING PROCEDURES

SUITABLE EXTINGUISHING MEDIA: Water spray, CO₂ dry chemical or foam.

HAZARDOUS COMBUSTION PRODUCTS: Carbon dioxide and carbon monoxide.

RECOMMENDED FIRE FIGHTING

PROCEDURES:

Self-contained breathing apparatus recommended.

UNUSUAL FIRE & EXPLOSION

HAZARDS:

None known.

SECTION 6: ACCIDENTAL RELEASE MEASURES

ACCIDENTAL RELEASE MEASURES: Dam up area to prevent spreading. Caution – area will be slippery.

Use absorbent material to dry up the compound. Provide

ventilation in closed areas.

SECTION 7: HANDLING AND STORAGE

HANDLING AND STORAGE: Store in a well ventilated area at 50 – 80 °F.

OTHER PRECAUTIONS: Protect from freezing.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

ENGINEERING CONTROLS / Provide sufficient mechanical (general and/or local exhaust)

VENTILATION: ventilation to maintain exposure below exposure limits.

RESPIRATORY PROTECTION: Use NIOSH-approved respirator.

EYE PROTECTION: Safety goggles or safety glasses with side shields.

SKIN PROTECTION: Wear appropriate impermeable gloves and protective clothing as

necessary to prevent skin contact.

OTHER PROTECTIVE EQUIPMENT: N/A

WORK HYGIENIC PRACTICES: Wash exposed skin prior to eating, drinking, or smoking and at the

end of each shift.

EXPOSURE GUIDELINES: N/A

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE & ODOR:	Heavy white liquid with ammonia odor.				
FLASH POINT:	> 240 °F	LOWER EXPLOSIVE LIMIT:	No data		
METHOD USED:	TCC	UPPER EXPLOSIVE LIMIT:	No data		
EVAPORATION RATE:	1.0	BOILING POINT:	212 °F		
pH (undiluted product):	No data	MELTING POINT:	No data		
SOLUBILITY IN WATER:	Dilutable in water	SPECIFIC GRAVITY:	1.32		
VAPOR DENSITY:	No data	PERCENT VOLATILE:	No data		
VAPOR PRESSURE:	No data	MOLECULAR WEIGHT:	No data		
VOC WITH WATER (LBS/GAL):	No data	WITHOUT WATER (LBS/GAL):	No data		

GAF					SDS # 1049	
SECTION 10: STABILITY AND RE	ACTIVITY	Y				
THERMAL STABILITY:			STABLE X		UNSTABLE	
CONDITIONS TO AVOID (STABI	LITY):	None kno	own.			
INCOMPATIBILITY (MATERIAL 1 AVOID):	го	Strong ox	kidizing agents			
HAZARDOUS DECOMPOSITION PRODUCTS:	OR BY-	Carbon n	Carbon monoxide and carbon dioxide.			
HAZARDOUS POLYMERIZATION	N:	Will not o	occur.			
SECTION 11: TOXICOLOGICAL I	NFORMA	TION				
TOXICOLOGICAL INFORMATION		nformation a	vailable.			
SECTION 12: ECOLOGICAL INFO	ORMATIO)N				
ECOLOGICAL INFORMATION:		nformation a	vailable.			
SECTION 13: DISPOSAL CONSID	DERATIO	NS				_
WASTE DISPOSAL METHOD:						
RCRA HAZARD CLASS:	ASS: None					

SECTION 14: TRANSPORTATION INFORMATION

U.S. DOT TRANSPORTATION

PROPER SHIPPING NAME: This product is not classified as a hazardous material for transport.

HAZARD CLASS: N/A

ID NUMBER: N/A

PACKING GROUP: N/A

LABEL STATEMENT: N/A

OTHER: N/A

SECTION 15: REGULATORY INFORMATION

U.S. FEDERAL REGULATIONS

TSCA: This product and its components are listed on the TSCA 8(b)

inventory.

CERCLA: None

SARA

311/312 HAZARD CATEGORIES: Acute Health Hazard

313 REPORTABLE INGREDIENTS: None

CALIFORNIA PROPOSITION 65: None

Other state regulations may apply. Check individual state requirements. The following components appear on one or more of the following state hazardous substances lists:

Chemical Name	CAS#	CA	MA	MN	NJ	PA	RI
Aluminum Trihydrate	21645-51-2	No	No	No	No	No	No
Titanium Dioxide	13463-67-7	No	No	Yes	Yes	Yes	Yes
Zinc Borate	138265-88-0	Yes	Yes	Yes	Yes	No	No

SECTION 16: OTHER INFORMATION

ADDITIONAL COMMENTS: None

DATE OF PREVIOUS SDS: September 2013

CHANGES SINCE PREVIOUS SDS: Headquarters Address Change.

This information relates to the specific material designated and may not be valid for such material used on combination with any other materials or in any process. Such information is to the best of our knowledge and belief accurate and reliable as of the date compiled. However, no representation, warranty or guarantee, expressed or implied, is made as to its accuracy, reliability, or completeness. It is the user's responsibility to satisfy himself as to the suitability and completeness of such information for his particular use. We do not accept liability for any loss or damage that may occur from the use of this information. Nothing herein shall be construed as a recommendation for uses which infringe valid patents or as extending a license of valid patents.

Safety Data Sheet



Section 1: Identification of the Substance/Mixture and of the Company/Undertaking

1.1 Product identifier

Product Name

- SLIP Plate Chain & Cable Aerosol
- 1.2 Relevant identified uses of the substance or mixture and uses advised against

Relevant identified use(s)

Dry film lubricant

1.3 Details of the supplier of the safety data sheet

Manufacturer

 Superior Graphite
 10 S. Riverside Plaza Chicago, IL 60606 United States

Telephone (General) • 312-559-2999 - (8-5 CST, M-F)

1.4 Emergency telephone number

Manufacturer

, 1-800-424-9300 - For Hazardous Materials [or Dangerous Goods] Incident Spill, Leak, Fire, Exposure, or Accident Call CHEMTREC Day or Night

Manufacturer

+1 703-527-3887 - Outside USA and Canada (collect calls accepted)

Section 2: Hazards Identification

EU/EEC

According to Regulation (EC) No 1272/2008 (CLP)/REACH 1907/2006 [amended by 453/2010] According to EU Directive 67/548/EEC (DSD) or 1999/45/EC (DPD)

2.1 Classification of the substance or mixture

CLP

Flammable Aerosols 1 - H222
 Skin Irritation 2 - H315

Specific Target Organ Toxicity Single Exposure 3: Narcotic Effects - H336

Specific Target Organ Toxicity Repeated Exposure 2 - H373 Hazardous to the aquatic environment Chronic 2 - H411

EUH066

DSD/DPD • Extremely Flammable (F+)

Harmful (Xn)

Dangerous to the Environment (N) R12, R48/20, R66, R67, R51, R53

2.2 Label Elements

CLP

DANGER









Hazard statements • H222 - Extremely flammable aerosol

H315 - Causes skin irritation

H336 - May cause drowsiness or dizziness

H373 - May cause damage to organs - Lungs through prolonged or repeated exposure via Inhalation

H411 - Toxic to aquatic life with long lasting effects

EUH066 - Repeated exposure may cause skin dryness or cracking.

Precautionary statements

Prevention • P210 - Keep away from heat, sparks, open flames and/or hot surfaces. - No smoking.

P211 - Do not spray on an open flame or other ignition source.

P251 - Pressurized container: Do not pierce or burn, even after use.

P260 - Do not breathe mist/vapours/spray. P264 - Wash thoroughly after handling.

P271 - Use only outdoors or in a well-ventilated area.

P273 - Avoid rélease to the environment.

P280 - Wear protective gloves .

Response P304+P340 - IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

P312 - Call a POISON ČENTER or doctor/physician if you feel unwell.

P302+P352 - IF ON SKIN: Wash with plenty of soap and water. P362 - Take off contaminated clothing and wash before reuse. P332+P313 - If skin irritation occurs: Get medical advice/attention.

P321 - Specific treatment, see supplemental first aid information.

P314 - Get medical advice/attention if you feel unwell.

P391 - Collect spillage.

Storage/Disposal .

P403+P233 - Store in a well-ventilated place. Keep container tightly closed.

P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

P405 - Store locked up.

P501 - Dispose of content and/or container in accordance with local, regional, national, and/or international regulations.

DSD/DPD







Risk phrases • R12 - Extremely flammable.

R48/20 - Harmful: danger of serious damage to health by prolonged exposure through inhalation.

R66 - Repeated exposure may cause skin dryness or cracking.

R67 - Vapours may cause drowsiness and dizziness.

R51 - Toxic to aquatic organisms.

R53 - May cause long-term adverse effects in the aquatic environment.

Safety phrases

S9 - Keep container in a well ventilated place

S16 - Keep away from sources of ignition - No Smoking.

S57 - Use appropriate containment to avoid environmental contamination.

2.3 Other Hazards

CLP

According to Regulation (EC) No. 1272/2008 (CLP) this material is considered hazardous.

DSD/DPD

According to European Directive 1999/45/EC this material is considered dangerous.

United States (US)

According to OSHA 29 CFR 1910.1200 HCS

2.1 Classification of the substance or mixture

OSHA HCS 2012

Flammable Aerosols 1 - H222

Skin Irritation 2 - H315 Eve Irritation 2 - H319

Specific Target Organ Toxicity Single Exposure 3: Narcotic Effects - H336

Specific Target Organ Toxicity Repeated Exposure 1 - H372

2.2 Label elements **OSHA HCS 2012**

DANGER







Hazard statements • Extremely flammable aerosol - H222

Causes skin irritation - H315

Causes serious eye irritation - H319

May cause drowsiness or dizziness - H336

Causes damage to organs - Lungs through prolonged or repeated exposure via

Inhalation - H372

Precautionary statements

Prevention .

Keep away from heat, sparks, open flames and/or hot surfaces. - No smoking. - P210

Do not spray on an open flame or other ignition source. - P211

Pressurized container: Do not pierce or burn, even after use. - P251

Do not breathe mist/vapours/spray. - P260 Wash thoroughly after handling. - P264

Do not eat, drink or smoke when using this product. - P270

Use only outdoors or in a well-ventilated area. - P271

Wear eye/face protection , . - P280 Wear protective gloves . - P280

Response . IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for

breathing. - P304+P340

Call a PŎISON CENTER or doctor/physician if you feel unwell. - P312

If on skin: Wash with plenty of water .

Take off contaminated clothing and wash before reuse. - P362 If skin irritation occurs: Get medical advice/attention. - P332+P313 Specific treatment, see supplemental first aid information. - P321

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses,

if present and easy to do. Continue rinsing. - P305+P351+P338 If eye irritation persists: Get medical advice/attention. - P337+P313 IF exposed or concerned: Get medical advice/attention. - P308+P313 Get medical advice/attention if you feel unwell. - P314

Storage/Disposal .

Store in a well-ventilated place. Keep container tightly closed. - P403+P233 Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. -

P410+P412

Store locked up. - P405

Dispose of content and/or container in accordance with local, regional, national, and/or

international regulations. - P501

2.3 Other hazards

OSHA HCS 2012

Under United States Regulations (29 CFR 1910.1200 - Hazard Communication Standard), this product is considered hazardous.

Canada

According to WHMIS

2.1 Classification of the substance or mixture

WHMIS

Flammable Aerosols - B5 Other Toxic Effects - D2A Other Toxic Effects - D2B

2.2 Label elements WHMIS





Flammable Aerosols - B5
 Other Toxic Effects - D2A
 Other Toxic Effects - D2B

2.3 Other hazards WHMIS

 In Canada, the product mentioned above is considered hazardous under the Workplace Hazardous Materials Information System (WHMIS).

Section 3 - Composition/Information on Ingredients

3.1 Substances

 Material does not meet the criteria of a substance in accordance with Regulation (EC) No 1272/2008.

3.2 Mixtures

	Composition						
Chemical Name	Identifiers	%	LD50/LC50	Classifications According to Regulation/Directive	Comments		
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	CAS:64742-52-5 EC Number:265- 155-0 EU Index:649- 465-00-7	< 70%	Ingestion/Oral-Rat LD50 • >5000 mg/kg Skin-Rabbit LD50 • >2000 mg/kg	EU DSD/DPD: Annex VI, Table 3.2: Carc.Cat.2 R45 (Note L) EU CLP: Annex VI, Table 3.1: Carc. 1B; H350 (Note L) OSHA HCS 2012: Skin Irrit. 2	Contains <3% DMSO therefore carcinogen classification does not apply		
Heptane	CAS:142-82-5 EC Number:205- 563-8 EU Index:601- 008-00-2	< 20%	Inhalation-Rat LC50 • 103 g/m³ 4 Hour(s)	EU DSD/DPD: Annex VI, Table 3.2: F R11 Xi R38 N R50-53 Xn R65 R67 EU CLP: Annex VI, Table 3.1: Flam. Liq. 2, H225; Asp. Tox. 1, H304; Skin Irrit. 2, H315; STOT SE 3: Narc., H336; Aquatic Acute 1, H400; Aquatic Chronic 1, H410 OSHA HCS 2012: Flam. Liq. 2; Skin Irrit. 2; Eye Irrit. 2; Asp. Tox. 1; STOT SE 3: Narc.	NDA		
Coke (petroleum), calcined	CAS:64743-05- 1 EC Number:265- 210-9	<pre></pre>		EU DSD/DPD: Self Classified: T R48/20 EU CLP: Self Classified: STOT RE 1 (Lungs, Inhl), H372 OSHA HCS 2012: STOT RE 1 (Lungs, Inhl)	NDA		
Acetone	CAS:67-64-1 EC Number:200- 662-2 EU Index:606- 001-00-8	< 10%	Ingestion/Oral-Rat LD50 • 5800 mg/kg Inhalation-Rat LC50 • 50100 mg/m³	EU DSD/DPD: Annex VI, Table 3.2: F R11 Xi R36 R66 R67 EU CLP: Annex VI, Table 3.1: Flam. Liq. 2, H226; Eye Irrit. 2, H319; STOT SE 3: Narc., H336; EUH066 OSHA HCS 2012: Flam. Liq. 2; Eye Irrit. 2, STOT SE 3: Narc.	NDA		
	CAS:74-98-6 EC			EU DSD/DPD: Annex VI, Table 3.2: F+; R12			

Propane	Number:200- 827-9 EU Index:601- 003-00-5	< 6%	NDA	EU CLP: Annex VI, Table 3.1: Flam. Gas 1, H220; Press. Gas - Comp., H280 OSHA HCS 2012: Flam. Gas 1; Press. Gas - Comp.; Simp. Asphyx.	NDA
Butane	CAS:106-97-8 EC Number:203- 448-7 EU Index:601- 004-00-0	< 6%	Inhalation-Rat LC50 • 658 g/m³ 4 Hour(s)	EU DSD/DPD: Annex VI, Table 3.2: F+ R12 EU CLP: Annex VI, Table 3.1: Flam. Gas 1, H220; Press. Gas - Comp., H280 OSHA HCS 2012: Flam. Gas 1; Press. Gas - Comp.; Simp. Asphyx.	NDA

Section 4 - First Aid Measures

4.1 Description of first aid measures

Inhalation . IF INH

 IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If signs/symptoms continue, get medical attention. Administer oxygen if breathing is difficult. Give artificial respiration if victim is not breathing.

• In case of contact with substance, immediately flush skin with running water for at least 20 minutes. For minor skin contact, avoid spreading material on unaffected skin. Get medical attention immediately if symptoms occur.

• In case of contact with substance, immediately flush eyes with running water for at least 20 minutes. If eye irritation persists: Get medical advice/attention.

If swallowed, DO NOT induce vomiting. Get medical attention.

4.2 Most important symptoms and effects, both acute and delayed

Refer to Section 11 - Toxicological Information.

4.3 Indication of any immediate medical attention and special treatment needed

Notes to Physician

Skin

Eve

Ingestion

 All treatments should be based on observed signs and symptoms of distress in the patient. Consideration should be given to the possibility that overexposure to materials other than this product may have occurred.

Section 5 - Firefighting Measures

5.1 Extinguishing media

Suitable Extinguishing Media • LARGE FIRE: Water spray, fog or regular foam.

SMALL FIRES: Dry chemical, CO2, water spray or regular foam.

Unsuitable Extinguishing Media

No data available

5.2 Special hazards arising from the substance or mixture

Unusual Fire and Explosion Hazards

 Closed containers may explode from internal pressure build-up when exposed to extreme heat and discharge contents.

Vapors may travel to source of ignition and flash back.

Vapors may form explosive mixtures with air.

Overexposure to decomposition products may cause a health hazard. Symptoms may not be immediately apparent. Obtain medical attention.

Hazardous Combustion Products

On burning, may release carbon dioxide and carbon monoxide.

5.3 Advice for firefighters

 Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.

Wear positive pressure self-contained breathing apparatus (SCBA). Water may be used to cool containers to prevent pressure build-up and explosion when exposed to extreme heat.

Section 6 - Accidental Release Measures

6.1 Personal precautions, protective equipment and emergency procedures

Personal Precautions

 Do not touch or walk through spilled material. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate enclosed areas

Emergency Procedures

 ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions. Keep unauthorized personnel away. Stay upwind. Ventilate closed spaces before entering. Keep out of low areas.

6.2 Environmental precautions

Prevent entry into waterways and sewers.

6.3 Methods and material for containment and cleaning up

Containment/Clean-up Measures

• Clean up area with absorbent material and place in closed containers for disposal. Wash floor with soap and water.

6.4 Reference to other sections

 Refer to Section 8 - Exposure Controls/Personal Protection and Section 13 - Disposal Considerations.

Section 7 - Handling and Storage

7.1 Precautions for safe handling

Handling

• Keep away from heat and ignition sources – No Smoking. Take precautionary measures against static charges. All equipment used when handling the product must be grounded. Do not puncture or incinerate (burn) cans. Do not stick a pin, nail or any other sharp object into opening on top of can. Use only with adequate ventilation. Use good safety and industrial hygiene practices. Wear appropriate personal protective equipment, avoid direct contact. Do not breathe (dust, vapor or spray mist) Avoid contact with eyes, skin and clothing. Do not use near ignition sources such as sparks or open flames. Do not cut, drill or weld on containers. Even empty containers may contain residue that will support a flame or explode when exposed to a spark, flame or other source of ignition. Do not eat, drink or smoke when using this product. After handling wash hands thoroughly.

7.2 Conditions for safe storage, including any incompatibilities

Storage

 Store in a cool, dry, well-ventilated place. Keep away from heat, sparks, and flame. Do not store at temperatures >120° F

7.3 Specific end use(s)

Refer to Section 1.2 - Relevant identified uses.

Section 8 - Exposure Controls/Personal Protection

8.1 Control parameters

Exposure Limits/Guidelines							
	Result	ACGIH	NIOSH	OSHA			
Propane (74-98-6)	TWAs	1000 ppm TWA (listed under Aliphatic hydrocarbon gases: Alkane C1-4)	1000 ppm TWA; 1800 mg/m3 TWA	1000 ppm TWA; 1800 mg/m3 TWA			

Butane	STELs	1000 ppm STEL	Not established	Not established
(106-97-8)	TWAs	Not established	800 ppm TWA; 1900 mg/m3 TWA	Not established
Acetone	TWAs	500 ppm TWA	250 ppm TWA; 590 mg/m3 TWA	1000 ppm TWA; 2400 mg/m3 TWA
(67-64-1)	STELs	750 ppm STEL	Not established	Not established
	TWAs	400 ppm TWA (listed under Heptane, all isomers)	85 ppm TWA; 350 mg/m3 TWA	500 ppm TWA; 2000 mg/m3 TWA
Heptane (142-82-5)	STELs	500 ppm STEL (listed under Heptane, all isomers)	Not established	Not established
	Ceilings	Not established	440 ppm Ceiling (15 min); 1800 mg/m3 Ceiling (15 min)	Not established

8.2 Exposure controls

Engineering Measures/Controls

 Good general ventilation should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Personal Protective Equipment

Respiratory

 Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or symptoms are experienced.

Eye/Face Skin/Body

- Wear safety goggles.
- Wear protective clothing and gloves.

Environmental Exposure Controls

Controls should be engineered to prevent release to the environment, including procedures to prevent spills, atmospheric release and release to waterways.

Key to abbreviations

ACGIH = American Conference of Governmental Industrial Hygiene NIOSH = National Institute of Occupational Safety and Health OSHA = Occupational Safety and Health Administration STEL = Short Term Exposure Limits are based on 15-minute exposures
TWA = Time-Weighted Averages are based on 8h/day, 40h/week exposures

Section 9 - Physical and Chemical Properties

9.1 Information on Physical and Chemical Properties

Material Description	Material Description						
Physical Form	Aerosol	Appearance/Description	Aerosol				
Color	Data lacking	Odor	Data lacking				
Odor Threshold	Data lacking						
General Properties	-	•	-				
Boiling Point	Data lacking	Melting Point	Data lacking				
Decomposition Temperature	Data lacking	рН	Data lacking				
Specific Gravity/Relative Density	Data lacking	Water Solubility	Negligible				
Viscosity	Data lacking	Explosive Properties	Data lacking				
Oxidizing Properties:	Data lacking						
Volatility		•	-				
Vapor Pressure	Data lacking	Vapor Density	Data lacking				
Evaporation Rate	Data lacking						
Flammability							
Flash Point	221 C (430 F)	UEL	Data lacking				
LEL	Data lacking	Autoignition	Data lacking				
	-						

Flammability (solid, gas)	Data lacking					
Environmental						
Octanol/Water Partition coefficient	Data lacking					

9.2 Other Information

No additional physical and chemical parameters noted.

Section 10: Stability and Reactivity

10.1 Reactivity

No dangerous reaction known under conditions of normal use.

10.2 Chemical stability

Stable

10.3 Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4 Conditions to avoid

Heat, sparks, open flames. Incompatible materials.

10.5 Incompatible materials

Strong oxidizing agents, acids, and alkalis.

10.6 Hazardous decomposition products

• On burning may release carbon dioxide and carbon monoxide.

Section 11 - Toxicological Information

11.1 Information on toxicological effects

	Components			
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) (< 70%)	64742- 52-5	Acute Toxicity: Ingestion/Oral-Rat LD50 • >5000 mg/kg; Skin-Rabbit LD50 • >2000 mg/kg; Irritation: Skin-Rabbit • 500 mg • Severe irritation		
Coke (petroleum), calcined (< 10%)	64743- 05-1	Acute Toxicity: Inhalation-Rat LC50 • >30.7 mg/m³ 6 Hour(s)		
Heptane (< 20%)	142-82- 5	Acute Toxicity: Inhalation-Rat LC50 • 103 g/m³ 4 Hour(s)		
Acetone (< 10%)	67-64-1	Acute Toxicity: Ingestion/Oral-Rat LD50 • 5800 mg/kg; Inhalation-Rat LC50 • 50100 mg/m³; Irritation: Eye-Rabbit • 20 mg • Severe irritation; Skin-Rabbit • 395 mg-Open • Mild irritation; Reproductive: Inhalation-Rat TCLo • 11000 ppm (6-19D preg); Reproductive Effects:Specific Developmental Abnormalities:Other developmental abnormalities		
Butane (< 6%)	106-97- 8	Acute Toxicity: Inhalation-Rat LC50 • 658 g/m³ 4 Hour(s)		

GHS Properties	Classification
	EU/CLP • Data lacking
Acute toxicity	OSHA HCS 2012 • Data lacking

Aspiration Hazard	EU/CLP • Data lacking OSHA HCS 2012 • Data lacking
Carcinogenicity	EU/CLP • Data lacking OSHA HCS 2012 • Data lacking
Germ Cell Mutagenicity	EU/CLP • Data lacking OSHA HCS 2012 • Data lacking
Skin corrosion/Irritation	EU/CLP • Skin Irritation 2 OSHA HCS 2012 • Skin Irritation 2
Skin sensitization	EU/CLP • Data lacking OSHA HCS 2012 • Data lacking
STOT-RE	EU/CLP • Specific Target Organ Toxicity Repeated Exposure 2 OSHA HCS 2012 • Specific Target Organ Toxicity Repeated Exposure 1
STOT-SE	EU/CLP • Specific Target Organ Toxicity Single Exposure 3: Narcotic Effects OSHA HCS 2012 • Specific Target Organ Toxicity Single Exposure 3: Narcotic Effects
Toxicity for Reproduction	EU/CLP • Data lacking OSHA HCS 2012 • Data lacking
Respiratory sensitization	EU/CLP • Data lacking OSHA HCS 2012 • Data lacking
Serious eye damage/Irritation	EU/CLP • Data lacking OSHA HCS 2012 • Eye Irritation 2

Potential Health Effects Inhalation

Acute (Immediate)

Chronic (Delayed)

- May affect the central nervous system. Symptoms may include dizziness, drowsiness, lethargy, coma and death.
- Repeated and prolonged inhalation may result in impaired lung function. Repeated or proplonged exposure may cause hyperactive reflexes, peripheral neuropathy, ataxia, personality changes, tremors, headaches, emotional liability, cognitive dysfunction and memory loss. Toluene abuse or sniffing may cause liver, kidney and central nervous system damage. Toluene may also cause sensitization to epinephrine or other adrenalin like agents.

Skin

Acute (Immediate)

Chronic (Delayed)

- Causes skin irritation.
- Contact may dry the skin prolonged contact may cause irritation. Solvent action can dry and defate the skin causing skin to crack, leading to dermatitis.

Under normal conditions of use, no health effects are expected.

Eye

Acute (Immediate)

Chronic (Delayed)

Ingestion

Acute (Immediate)

Chronic (Delayed)

- Causes serious eye irritation.
- No data available

- No data available
- Key to abbreviations

LC = Lethal Concentration

LD = Lethal Dose

TC = Toxic Concentration

Section 12 - Ecological Information

12.1 Toxicity

 This product contains a component that is potentially toxic to aquatic organisms and may have long lasting effects to the aquatic environment.

12.2 Persistence and degradability

Material data lacking.

12.3 Bioaccumulative potential

Material data lacking.

12.4 Mobility in Soil

Material data lacking.

12.5 Results of PBT and vPvB assessment

No PBT and vPvB assessment has been conducted.

12.6 Other adverse effects

No studies have been found.

Section 13 - Disposal Considerations

13.1 Waste treatment methods

Product waste

 Dispose of content and/or container in accordance with local, regional, national, and/or international regulations.

Packaging waste

 Dispose of content and/or container in accordance with local, regional, national, and/or international regulations.

Section 14 - Transport Information

	14.1 UN number	14.2 UN proper shipping name	14.3 Transport hazard class(es)	14.4 Packing group	14.5 Environmental hazards
DOT	NDA	Consumer Commodity, ORM-D	NDA	NDA	NDA
TDG	NDA	Consumer Commodity, ORM-D	NDA	NDA	NDA
IMO/IMDG	UN1950	AEROSOLS	2.1	NDA	NDA
IATA/ICAO	UN1950	Aerosols	2.1	NDA	NDA

14.6 Special precautions for user

None specified.

14.7 Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Data lacking.

Section 15 - Regulatory Information

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

SARA Hazard Classifications • Acute, Chronic, Fire, Pressure(Sudden Release of)

			Inventory		
Component	CAS	Canada DSL	Canada NDSL	EU EINECS	EU ELNICS
Acetone	67-64-1	Yes	No	Yes	No
Butane	106-97-8	Yes	No	Yes	No
Coke (petroleum), calcined	64743-05-1	Yes	No	Yes	No
Heptane	142-82-5	Yes	No	Yes	No
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Yes	No	Yes	No
Propane	74-98-6	Yes	No	Yes	No

Canada

Acetone	67-64-1	B2, D2B
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
Heptane	142-82-5	B2, D2B
Propane	74-98-6	A, B1
Butane	106-97-8	A, B1
Coke (petroleum), calcined	64743-05-1	Not Listed
Canada - WHMIS - Ingredient Disclosure List	67-64-1	1 0/
Acetone	67-64-1	1 %
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	1 %
• Propane	74-98-6	Not Listed
Butane	106-97-8	1 %

nvironment Canada - 2004 NPRI (National Pollutant Release Inventory)		
• Acetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
• Propane	74-98-6	Part 5 Substance
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
Canada - 2005 NPRI (National Pollutant Release Inventory)		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Part 5 Substance
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
Canada - CEPA - Greenhouse Gases Subject to Mandatory Reporting		
• Acetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed

Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
Canada - CEPA - Priority Substances List		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
Canada - DWQ (Drinking Water Quality) - IMACs		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed

67-64-1	Not Listed
	Not Listed
64742-52-5	Not Listed
142-82-5	Not Listed
74-98-6	Not Listed
106-97-8	Not Listed
64743-05-1	Not Listed
	142-82-5 74-98-6 106-97-8

Canada New Brunswick

cetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
	04740 00 1	140t Elotod
	04740 00 1	140t Elotod
anada - New Brunswick - Ozone Depleting Substances - Schedule B	67-64-1	Not Listed
anada - New Brunswick - Ozone Depleting Substances - Schedule B Acetone Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)		
anada - New Brunswick - Ozone Depleting Substances - Schedule B Acetone	67-64-1	Not Listed
anada - New Brunswick - Ozone Depleting Substances - Schedule B Acetone Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	67-64-1 64742-52-5	Not Listed Not Listed
anada - New Brunswick - Ozone Depleting Substances - Schedule B Acetone Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) Heptane	67-64-1 64742-52-5 142-82-5	Not Listed Not Listed Not Listed

Europe

Other EU - Hazardous Substances Restricted or Prohibited in Electrical Equipment	(2011/65/EU) (RoHS)	
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed

Heptane	142-82-5 Not Listed	
Propane	74-98-6 Not Listed	
Butane	106-97-8 Not Listed	
Coke (petroleum), calcined	64743-05-1 Not Listed	

Japan

Environment Inventory - Japan - Industrial Safety and Health Law Substances (ISHL)		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed

ipan - Chemical Substance Control Law (CSCL) - Monitoring Chemical Si	ubstances	
Acetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
• Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
apan - Poisonous and Deleterious Substances - Substances Not Conside	ered Deleterious	
Acetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
• Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
Japan - Poisonous and Deleterious Substances - Substances Not Conside	ered Poisonous	
Acetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed

United States

Labor		
U.S OSHA - Process Safety Management - Highly Hazardous Chemicals		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S OSHA - Specifically Regulated Chemicals		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed

Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed

Environment		
U.S CAA (Clean Air Act) - 1990 Hazardous Air Pollutants		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S CERCLA/SARA - Hazardous Substances and their Reportable Quantities		
Acetone	67-64-1	5000 lb final RQ; 2270 kg final RQ
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S CERCLA/SARA - Radionuclides and Their Reportable Quantities		
Acetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
• Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S CERCLA/SARA - Section 302 Extremely Hazardous Substances EPCRA RQs		
• Acetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S CERCLA/SARA - Section 302 Extremely Hazardous Substances TPQs		
Acetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S CERCLA/SARA - Section 313 - Emission Reporting		
Acetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed

Acetone	67-64-1	Not Listed
Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed

United States - California

Environment U.S California - Proposition 65 - Carcinogens List		
• Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
• Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S California - Proposition 65 - Developmental Toxicity		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S California - Proposition 65 - Maximum Allowable Dose Levels (MADL)		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S California - Proposition 65 - No Significant Risk Levels (NSRL)		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
• Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S California - Proposition 65 - Reproductive Toxicity - Female		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed
Heptane	142-82-5	Not Listed
• Propane	74-98-6	Not Listed
Butane	106-97-8	Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed
U.S California - Proposition 65 - Reproductive Toxicity - Male		
Acetone	67-64-1	Not Listed
 Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined) 	64742-52-5	Not Listed

 Heptane Propane Butane	142-82-5 74-98-6 106-97-8	Not Listed Not Listed Not Listed
Coke (petroleum), calcined	64743-05-1	Not Listed

United States - Rhode Island

U.S. - Rhode Island - Hazardous Substance List

Hydrotreated heavy naphthenic distillates (petroleum) (Highly Refined)
 Heptane
 Propane
 Butane
 Coke (petroleum), calcined
 Highly Refined
 142-82-5
 Toxic; Flammable
 Toxic; Flammable
 Toxic; Flammable
 Mot Listed
 Toxic; Flammable
 Mot Listed

15.2 Chemical Safety Assessment

No Chemical Safety Assessment has been carried out.

Section 16 - Other Information

Relevant Phrases (code & full text)

H220 - Extremely flammable gas

H225 - Highly flammable liquid and vapour

H226 - Flammable liquid and vapour

H280 - Contains gas under pressure; may explode if heated

H304 - May be fatal if swallowed and enters airways

H319 - Causes serious eye irritation

H350 - May cause cancer.

H372 - Causes damage to organs through prolonged or repeated exposure.

67-64-1

Toxic; Flammable

H400 - Very toxic to aquatic life

H410 - Very toxic to aquatic life with long lasting effects

R11 - Highly flammable.

R36 - Irritating to eyes.

R38 - Irritating to skin.

R45 - May cause cancer.

R50 - Very toxic to aquatic organisms.

R53 - May cause long-term adverse effects in the aquatic environment.

R65 - Harmful: may cause lung damage if swallowed.

Last Revision Date

Preparation Date

Disclaimer/Statement of Liability

22/September/2014

22/September/2014

The information contained herein is based on data available. However, no warranty is expressed or implied regarding the accuracy of the data or the results obtained from the use thereof. Because the information contained herein may be applied under conditions beyond our control, we assume no responsibility for its use.

Key to abbreviations

NDA = No data available



Safety Data Sheet

Copyright, 2016, 3M Company.

All rights reserved. Copying and/or downloading of this information for the purpose of properly utilizing 3M products is allowed provided that: (1) the information is copied in full with no changes unless prior written agreement is obtained from 3M, and (2) neither the copy nor the original is resold or otherwise distributed with the intention of earning a profit thereon.

22-0411-3 **Version Number:** 3.00 **Document Group: Issue Date:** 01/20/16 **Supercedes Date:** 10/15/14

SECTION 1: Identification

1.1. Product identifier

3M(TM) Spray-Mount(TM) Artist's Adhesive 6064, 6065

Product Identification Numbers

ID Number	UPC	ID Number	UPC
62-4662-2926-7	000-21200-96470-1	62-4662-4827-5	000-21200-30060-8
62-4662-4828-3	000-21200-31366-0	62-4662-4829-1	000-21200-30060-8
70-0050-1482-7	500-21200-30060-3	70-0050-1806-7	500-51141-23992-2
70-0050-8169-3	500-21200-30060-3	70-0050-8838-3	500-51141-23992-2
70-0052-7864-6		H0-0017-2522-7	

1.2. Recommended use and restrictions on use

Recommended use

Adhesive

1.3. Supplier's details

MANUFACTURER:

DIVISION: Stationery and Office Supplies Division **ADDRESS:** 3M Center, St. Paul, MN 55144-1000, USA **Telephone:** 1-888-3M HELPS (1-888-364-3577)

1.4. Emergency telephone number

1-800-364-3577 or (651) 737-6501 (24 hours)

SECTION 2: Hazard identification

2.1. Hazard classification

Flammable Aerosol: Category 1. Gas Under Pressure: Liquefied gas.

Serious Eye Damage/Irritation: Category 2A.

Simple Asphyxiant.

Specific Target Organ Toxicity (single exposure): Category 1. Specific Target Organ Toxicity (central nervous system): Category 3.

2.2. Label elements

Signal word

3M(TM) Spray-Mount(TM) Artist's Adhesive 6064, 6065 01/20/16

Danger

Symbols

Flame | Exclamation mark | Health Hazard |

Pictograms



Hazard Statements

Extremely flammable aerosol.

Contains gas under pressure; may explode if heated.

Causes serious eye irritation.

May cause drowsiness or dizziness.

May displace oxygen and cause rapid suffocation.

Causes damage to organs:

cardiovascular system |

Precautionary Statements

General:

Keep out of reach of children.

Prevention:

Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

Do not spray on an open flame or other ignition source.

Pressurized container: Do not pierce or burn, even after use.

Do not breathe dust/fume/gas/mist/vapors/spray.

Use only outdoors or in a well-ventilated area.

Wear eye/face protection.

Do not eat, drink or smoke when using this product.

Wash thoroughly after handling.

Response:

IF INHALED: Remove person to fresh air and keep comfortable for breathing.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing.

If eye irritation persists: Get medical advice/attention.

IF exposed: Call a POISON CENTER or doctor/physician.

Specific treatment (see Notes to Physician on this label).

Storage:

Protect from sunlight. Do not expose to temperatures exceeding 50C/122F.

Store in a well-ventilated place. Keep container tightly closed.

Store locked up.

Disposal:

Dispose of contents/container in accordance with applicable local/regional/national/international regulations.

Notes to Physician:

Exposure may increase myocardial irritability. Do not administer sympathomimetic drugs unless absolutely necessary.

Page 2 of 12

2.3. Hazards not otherwise classified

None.

SECTION 3: Composition/information on ingredients

Ingredient	C.A.S. No.	% by Wt
ACETONE	67-64-1	30 - 40 Trade Secret *
HEPTANE ISOMERS	64742-49-0	20 - 30 Trade Secret *
ISOBUTANE	75-28-5	20 - 30 Trade Secret *
PROPANE	74-98-6	7 - 13 Trade Secret *
NON-VOLATILE COMPONENTS - N.J. TRADE	Trade Secret*	5 - 10 Trade Secret *
SECRET REGISTRY NO. 04499600-6201P++		

^{*}The specific chemical identity and/or exact percentage (concentration) of this composition has been withheld as a trade

SECTION 4: First aid measures

4.1. Description of first aid measures

Inhalation:

Remove person to fresh air. Get medical attention.

Skin Contact:

Wash with soap and water. If signs/symptoms develop, get medical attention.

Immediately flush with large amounts of water. Remove contact lenses if easy to do. Continue rinsing. Get medical attention.

If Swallowed:

Rinse mouth. If you feel unwell, get medical attention.

4.2. Most important symptoms and effects, both acute and delayed

See Section 11.1. Information on toxicological effects.

4.3. Indication of any immediate medical attention and special treatment required

Exposure may increase myocardial irritability. Do not administer sympathomimetic drugs unless absolutely necessary.

SECTION 5: Fire-fighting measures

5.1. Suitable extinguishing media

Use a fire fighting agent suitable for the surrounding fire.

5.2. Special hazards arising from the substance or mixture

Closed containers exposed to heat from fire may build pressure and explode.

Hazardous Decomposition or By-Products

Substance Condition Aldehydes **During Combustion** Carbon monoxide **During Combustion** Carbon dioxide **During Combustion**

5.3. Special protective actions for fire-fighters

Water may not effectively extinguish fire; however, it should be used to keep fire-exposed containers and surfaces cool and prevent explosive rupture.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

Evacuate area. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use only non-sparking tools. Ventilate the area with fresh air. Warning! A motor could be an ignition source and could cause flammable gases or vapors in the spill area to burn or explode. Refer to other sections of this SDS for information regarding physical and health hazards, respiratory protection, ventilation, and personal protective equipment.

6.2. Environmental precautions

Avoid release to the environment.

6.3. Methods and material for containment and cleaning up

If possible, seal leaking container. Place leaking containers in a well-ventilated area, preferably an operating exhaust hood, or if necessary outdoors on an impermeable surface until appropriate packaging for the leaking container or its contents is available. Contain spill. Cover spill area with a fire-extinguishing foam. An appropriate aqueous film forming foam (AFFF) is recommended. Working from around the edges of the spill inward, cover with bentonite, vermiculite, or commercially available inorganic absorbent material. Mix in sufficient absorbent until it appears dry. Remember, adding an absorbent material does not remove a physical, health, or environmental hazard. Collect as much of the spilled material as possible using non-sparking tools. Place in a metal container approved for transportation by appropriate authorities. Clean up residue with an appropriate solvent selected by a qualified and authorized person. Ventilate the area with fresh air. Read and follow safety precautions on the solvent label and SDS. Seal the container. Dispose of collected material as soon as possible.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Do not use in a confined area with minimal air exchange. Keep out of reach of children. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Do not breathe dust/fume/gas/mist/vapors/spray. Do not get in eyes, on skin, or on clothing. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Avoid contact with oxidizing agents (eg. chlorine, chromic acid etc.)

7.2. Conditions for safe storage including any incompatibilities

Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50C/122F. Store away from heat. Store away from acids. Store away from oxidizing agents.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Occupational exposure limits

If a component is disclosed in section 3 but does not appear in the table below, an occupational exposure limit is not available for the component.

Ingredient	C.A.S. No.	Agency	Limit type	Additional Comments
HEPTANE ISOMERS	64742-49-0	CMRG	TWA:50 ppm	
ACETONE	67-64-1	ACGIH	TWA:250 ppm;STEL:500 ppm	A4: Not class. as human carcin
ACETONE	67.64.1	OCITA	TW/A 2400 / 2(1000)	carem
ACETONE	67-64-1	OSHA	TWA:2400 mg/m3(1000 ppm)	
PROPANE	74-98-6	ACGIH	Limit value not established:	
PROPANE	74-98-6	OSHA	TWA:1800 mg/m3(1000 ppm)	
ISOBUTANE	75-28-5	ACGIH	STEL:1000 ppm	

Page 4 of 12

3M(TM) Spray-Mount(TM) Artist's Adhesive 6064, 6065 01/20/16

Natural gas 75-28-5 ACGIH Limit value not established:

ACGIH: American Conference of Governmental Industrial Hygienists

AIHA: American Industrial Hygiene Association

CMRG: Chemical Manufacturer's Recommended Guidelines

OSHA: United States Department of Labor - Occupational Safety and Health Administration

TWA: Time-Weighted-Average STEL: Short Term Exposure Limit

CEIL: Ceiling

8.2. Exposure controls

8.2.1. Engineering controls

Do not remain in area where available oxygen may be reduced. Use general dilution ventilation and/or local exhaust ventilation to control airborne exposures to below relevant Exposure Limits and/or control dust/fume/gas/mist/vapors/spray. If ventilation is not adequate, use respiratory protection equipment.

8.2.2. Personal protective equipment (PPE)

Eye/face protection

Select and use eye/face protection to prevent contact based on the results of an exposure assessment. The following eye/face protection(s) are recommended:

Indirect Vented Goggles

Skin/hand protection

Select and use gloves and/or protective clothing approved to relevant local standards to prevent skin contact based on the results of an exposure assessment. Selection should be based on use factors such as exposure levels, concentration of the substance or mixture, frequency and duration, physical challenges such as temperature extremes, and other use conditions. Consult with your glove and/or protective clothing manufacturer for selection of appropriate compatible gloves/protective clothing.

Gloves made from the following material(s) are recommended: Butyl Rubber

Respiratory protection

In case of inadequate ventilation wear respiratory protection. An exposure assessment may be needed to decide if a respirator is required. If a respirator is needed, use respirators as part of a full respiratory protection program. Based on the results of the exposure assessment, select from the following respirator type(s) to reduce inhalation exposure:

Half facepiece or full facepiece supplied-air respirator

Organic vapor respirators may have short service life.

For questions about suitability for a specific application, consult with your respirator manufacturer.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

General Physical Form: Liquid **Specific Physical Form:** Aerosol

Odor, Color, Grade: Mild Solvent Odor/Clear-light yellow

Odor thresholdNo Data AvailablepHNot ApplicableMelting pointNot ApplicableBoiling PointNot Applicable

Flash Point -50.00 °F [*Test Method:* Tagliabue Closed Cup] [*Details:*

CONDITIONS: Propellant]

Evaporation rateNo Data Available
Flammability (solid, gas)
Not Applicable

Flammable Limits(LEL) Approximately 1.85 % volume

Page 5 of 12

3M(TM) Spray-Mount(TM) Artist's Adhesive 6064, 6065 01/20/16

Flammable Limits(UEL) Approximately 9.9 % volume

No Data Available **Vapor Density**

Density 0.673 g/ml

Specific Gravity 0.673 [*Ref Std:* WATER=1]

Solubility in Water Negligible

Solubility- non-water No Data Available No Data Available Partition coefficient: n-octanol/ water **Autoignition temperature** No Data Available No Data Available **Decomposition temperature** Not Applicable Viscosity

Hazardous Air Pollutants 0 % weight [Test Method: Calculated]

Volatile Organic Compounds Approximately 58 % weight Percent volatile Approximately 91 % weight

VOC Less H2O & Exempt Solvents Approximately 538 g/l [Test Method: calculated SCAQMD rule

443.1]

SECTION 10: Stability and reactivity

10.1. Reactivity

This material may be reactive with certain agents under certain conditions - see the remaining headings in this section.

10.2. Chemical stability

Stable.

10.3. Possibility of hazardous reactions

Hazardous polymerization will not occur.

10.4. Conditions to avoid

Heat

Sparks and/or flames

10.5. Incompatible materials

None known.

10.6. Hazardous decomposition products

Substance Condition

None known.

Refer to section 5.2 for hazardous decomposition products during combustion.

SECTION 11: Toxicological information

The information below may not be consistent with the material classification in Section 2 if specific ingredient classifications are mandated by a competent authority. In addition, toxicological data on ingredients may not be reflected in the material classification and/or the signs and symptoms of exposure, because an ingredient may be present below the threshold for labeling, an ingredient may not be available for exposure, or the data may not be relevant to the material as a whole.

11.1. Information on Toxicological effects

Signs and Symptoms of Exposure

Based on test data and/or information on the components, this material may produce the following health effects:

Inhalation:

Intentional concentration and inhalation may be harmful or fatal.

Simple Asphyxiation: Signs/symptoms may include increased heart rate, rapid respirations, drowsiness, headache, incoordination, altered judgement, nausea, vomiting, lethargy, seizures, coma, and may be fatal.

Respiratory Tract Irritation: Signs/symptoms may include cough, sneezing, nasal discharge, headache, hoarseness, and nose and throat pain.

May cause additional health effects (see below).

Skin Contact:

Mild Skin Irritation: Signs/symptoms may include localized redness, swelling, itching, and dryness.

Eye Contact:

Severe Eye Irritation: Signs/symptoms may include significant redness, swelling, pain, tearing, cloudy appearance of the cornea, and impaired vision.

Ingestion:

Gastrointestinal Irritation: Signs/symptoms may include abdominal pain, stomach upset, nausea, vomiting and diarrhea.

May cause additional health effects (see below).

Additional Health Effects:

Single exposure may cause target organ effects:

Central Nervous System (CNS) Depression: Signs/symptoms may include headache, dizziness, drowsiness, incoordination, nausea, slowed reaction time, slurred speech, giddiness, and unconsciousness.

Single exposure, above recommended guidelines, may cause:

Cardiac Sensitization: Signs/symptoms may include irregular heartbeat (arrhythmia), faintness, chest pain, and may be fatal.

Toxicological Data

If a component is disclosed in section 3 but does not appear in a table below, either no data are available for that endpoint or the data are not sufficient for classification.

Acute Toxicity

Name	Route	Species	Value
Overall product	Dermal		No data available; calculated ATE > 5,000 mg/kg
Overall product	Inhalation- Vapor(4 hr)		No data available; calculated ATE > 50 mg/l
Overall product	Ingestion		No data available; calculated ATE > 5,000 mg/kg
ACETONE	Dermal	Rabbit	LD50 > 15,688 mg/kg
ACETONE	Inhalation- Vapor (4 hours)	Rat	LC50 76 mg/l
ACETONE	Ingestion	Rat	LD50 5,800 mg/kg
ISOBUTANE	Inhalation- Gas (4 hours)	Rat	LC50 276,000 ppm
HEPTANE ISOMERS	Dermal	Rabbit	LD50 > 3,160 mg/kg
HEPTANE ISOMERS	Inhalation- Vapor (4 hours)	Rat	LC50 > 14.7 mg/l
HEPTANE ISOMERS	Ingestion	Rat	LD50 > 5,000 mg/kg
PROPANE	Inhalation- Gas (4 hours)	Rat	LC50 > 200,000 ppm

3M(TM) Spray-Mount(TM) Artist's Adhesive 6064, 6065 01/20/16

NON-VOLATILE COMPONENTS - N.J. TRADE SECRET	Dermal	LD50 estimated to be > 5,000 mg/kg
REGISTRY NO. 04499600-6201P++		
NON-VOLATILE COMPONENTS - N.J. TRADE SECRET	Ingestion	LD50 estimated to be 2,000 - 5,000 mg/kg
REGISTRY NO. 04499600-6201P++		

ATE = acute toxicity estimate

Skin Corrosion/Irritation

Name	Species	Value
ACETONE	Mouse	Minimal irritation
ISOBUTANE	Professio	No significant irritation
	nal	
	judgeme	
	nt	
HEPTANE ISOMERS	Rabbit	Irritant
PROPANE	Rabbit	Minimal irritation
NON-VOLATILE COMPONENTS - N.J. TRADE SECRET REGISTRY NO.	Professio	No significant irritation
04499600-6201P++	nal	
	judgeme	
	nt	

Serious Eye Damage/Irritation

crious Lye Dumage in reaction						
Name	Species	Value				
	•					
ACETONE	Rabbit	Severe irritant				
ISOBUTANE	Professio	No significant irritation				
	nal					
	judgeme					
	nt					
HEPTANE ISOMERS	Rabbit	Mild irritant				
PROPANE	Rabbit	Mild irritant				

Skin Sensitization

Name	Species	Value
HEPTANE ISOMERS	Guinea	Not sensitizing
	pig	
NON-VOLATILE COMPONENTS - N.J. TRADE SECRET REGISTRY NO.	Professio	Not sensitizing
04499600-6201P++	nal	_
	judgeme	
	nt	

Respiratory Sensitization

For the component/components, either no data are currently available or the data are not sufficient for classification.

Germ Cell Mutagenicity

Name	Route	Value
ACETONE	In vivo	Not mutagenic
ACETONE	In Vitro	Some positive data exist, but the data are not sufficient for classification
ISOBUTANE	In Vitro	Not mutagenic
HEPTANE ISOMERS	In Vitro	Not mutagenic
PROPANE	In Vitro	Not mutagenic

Carcinogenicity

Curcinogementy			
Name	Route	Species	Value
ACETONE	Not	Multiple	Not carcinogenic
	Specified	animal	
		species	
HEPTANE ISOMERS	Inhalation	Mouse	Some positive data exist, but the data are not
			sufficient for classification

Reproductive Toxicity

Reproductive and/or Developmental Effects

Name	Route	Value	Species	Test Result	Exposure Duration
ACETONE	Ingestion	Some positive male reproductive data exist, but the data are not sufficient for classification	Rat	NOAEL 1,700 mg/kg/day	13 weeks
ACETONE	Inhalation	Some positive developmental data exist, but the data are not sufficient for classification	Rat	NOAEL 5.2 mg/l	during organogenesi s

Target Organ(s)

Specific Target Organ Toxicity - single exposure

Name	Route	Target Organ(s)	Value	Species	Test Result	Exposure Duration
ACETONE	Inhalation	central nervous system depression	May cause drowsiness or dizziness	Human	NOAEL Not available	
ACETONE	Inhalation	respiratory irritation	Some positive data exist, but the data are not sufficient for classification	Human	NOAEL Not available	
ACETONE	Inhalation	immune system	Some positive data exist, but the data are not sufficient for classification	Human	NOAEL 1.19 mg/l	6 hours
ACETONE	Inhalation	liver	Some positive data exist, but the data are not sufficient for classification	Guinea pig	NOAEL Not available	
ACETONE	Ingestion	central nervous system depression	May cause drowsiness or dizziness	Human	NOAEL Not available	poisoning and/or abuse
ISOBUTANE	Inhalation	cardiac sensitization	Causes damage to organs	Multiple animal species	NOAEL Not available	
ISOBUTANE	Inhalation	central nervous system depression	May cause drowsiness or dizziness	Human and animal	NOAEL Not available	
ISOBUTANE	Inhalation	respiratory irritation	All data are negative	Mouse	NOAEL Not available	
HEPTANE ISOMERS	Inhalation	central nervous system depression	May cause drowsiness or dizziness	Human and animal	NOAEL Not available	
HEPTANE ISOMERS	Inhalation	respiratory irritation	Some positive data exist, but the data are not sufficient for classification		NOAEL Not available	
HEPTANE ISOMERS	Ingestion	central nervous system depression	May cause drowsiness or dizziness	Professio nal judgeme nt	NOAEL Not available	
PROPANE	Inhalation	cardiac sensitization	Causes damage to organs	Human	NOAEL Not available	
PROPANE	Inhalation	central nervous system depression	May cause drowsiness or dizziness	Human	NOAEL Not available	
PROPANE	Inhalation	respiratory irritation	All data are negative	Human	NOAEL Not available	

Specific Target Organ Toxicity - repeated exposure

Name	Route	Target Organ(s)	Value	Species	Test Result	Exposure Duration
ACETONE	Dermal	eyes	Some positive data exist, but the data are not sufficient for classification	Guinea pig	NOAEL Not available	3 weeks
ACETONE	Inhalation	hematopoietic system	Some positive data exist, but the data are not sufficient for classification	Human	NOAEL 3 mg/l	6 weeks
ACETONE	Inhalation	immune system	Some positive data exist, but the data are not sufficient for classification	Human	NOAEL 1.19 mg/l	6 days

3M(TM) Spray-Mount(TM) Artist's Adhesive 6064, 6065 01/20/16

ACETONE	Inhalation	kidney and/or bladder	Some positive data exist, but the data are not sufficient for classification	Guinea pig	NOAEL 119 mg/l	not available
ACETONE	Inhalation	heart liver	All data are negative	Rat	NOAEL 45 mg/l	8 weeks
ACETONE	Ingestion	kidney and/or bladder	Some positive data exist, but the data are not sufficient for classification	Rat	NOAEL 900 mg/kg/day	13 weeks
ACETONE	Ingestion	heart	Some positive data exist, but the data are not sufficient for classification	Rat	NOAEL 2,500 mg/kg/day	13 weeks
ACETONE	Ingestion	hematopoietic system	Some positive data exist, but the data are not sufficient for classification	Rat	NOAEL 200 mg/kg/day	13 weeks
ACETONE	Ingestion	liver	Some positive data exist, but the data are not sufficient for classification	Mouse	NOAEL 3,896 mg/kg/day	14 days
ACETONE	Ingestion	eyes	All data are negative	Rat	NOAEL 3,400 mg/kg/day	13 weeks
ACETONE	Ingestion	respiratory system	All data are negative	Rat	NOAEL 2,500 mg/kg/day	13 weeks
ACETONE	Ingestion	muscles	All data are negative	Rat	NOAEL 2,500 mg/kg	13 weeks
ACETONE	Ingestion	skin bone, teeth, nails, and/or hair	All data are negative	Mouse	NOAEL 11,298 mg/kg/day	13 weeks
ISOBUTANE	Inhalation	kidney and/or bladder	Some positive data exist, but the data are not sufficient for classification	Rat	NOAEL 4,500 ppm	13 weeks

Aspiration Hazard

					
Name	Value				
HEPTANE ISOMERS	Aspiration hazard				

Please contact the address or phone number listed on the first page of the SDS for additional toxicological information on this material and/or its components.

SECTION 12: Ecological information

Ecotoxicological information

Please contact the address or phone number listed on the first page of the SDS for additional ecotoxicological information on this material and/or its components.

Chemical fate information

Please contact the address or phone number listed on the first page of the SDS for additional chemical fate information on this material and/or its components.

SECTION 13: Disposal considerations

13.1. Disposal methods

Dispose of contents/ container in accordance with the local/regional/national/international regulations.

Dispose of completely cured (or polymerized) material in a permitted industrial waste facility. As a disposal alternative, incinerate uncured product in a permitted waste incineration facility. Facility must be capable of handling aerosol cans. If no other disposal options are available, waste product that has been completely cured or polymerized may be placed in a landfill properly designed for industrial waste. Empty drums/barrels/containers used for transporting and handling hazardous chemicals (chemical substances/mixtures/preparations classified as Hazardous as per applicable regulations) shall be considered, stored, treated & disposed of as hazardous wastes unless otherwise defined by applicable waste regulations.

Page 10 of 12

3M(TM) Spray-Mount(TM) Artist's Adhesive 6064, 6065 01/20/16

Consult with the respective regulating authorities to determine the available treatment and disposal facilities.

EPA Hazardous Waste Number (RCRA): D001 (Ignitable)

SECTION 14: Transport Information

For Transport Information, please visit http://3M.com/Transportinfo or call 1-800-364-3577 or 651-737-6501.

SECTION 15: Regulatory information

15.1. US Federal Regulations

Contact 3M for more information.

311/312 Hazard Categories:

Fire Hazard - Yes Pressure Hazard - Yes Reactivity Hazard - No Immediate Hazard - Yes Delayed Hazard - No

15.2. State Regulations

Contact 3M for more information.

15.3. Chemical Inventories

The components of this product are in compliance with the chemical notification requirements of TSCA.

Contact 3M for more information.

15.4. International Regulations

Non hazardous according to WHMIS criteria.

Contact 3M for more information.

This SDS has been prepared to meet the U.S. OSHA Hazard Communication Standard, 29 CFR 1910.1200.

SECTION 16: Other information

NFPA Hazard Classification

Health: 3 Flammability: 4 Instability: 0 Special Hazards: None

Aerosol Storage Code: 3

National Fire Protection Association (NFPA) hazard ratings are designed for use by emergency response personnel to address the hazards that are presented by short-term, acute exposure to a material under conditions of fire, spill, or similar emergencies. Hazard ratings are primarily based on the inherent physical and toxic properties of the material but also include the toxic properties of combustion or decomposition products that are known to be generated in significant quantities.

HMIS Hazard Classification

Health: *3 Flammability: 4 Physical Hazard: 0 Personal Protection: X - See PPE section.

Hazardous Material Identification System (HMIS® IV) hazard ratings are designed to inform employees of chemical hazards in the workplace. These ratings are based on the inherent properties of the material under expected conditions of normal use and are not intended for use in emergency situations. HMIS® IV ratings are to be used with a fully implemented HMIS® IV program. HMIS® is a registered mark of the American Coatings Association (ACA).

Document Group: 22-0411-3 **Version Number:** 3.00

3M(TM) Spray-Mount(TM) Artist's Adhesive 6064, 6065 01/20/16

Issue Date: 01/20/16 **Supercedes Date:** 10/15/14

DISCLAIMER: The information in this Safety Data Sheet (SDS) is believed to be correct as of the date issued. 3M MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR COURSE OF PERFORMANCE OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's method of use or application. Given the variety of factors that can affect the use and application of a 3M product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for user's method of use or application.

3M provides information in electronic form as a service to its customers. Due to the remote possibility that electronic transfer may have resulted in errors, omissions or alterations in this information, 3M makes no representations as to its completeness or accuracy. In addition, information obtained from a database may not be as current as the information in the SDS available directly from 3M

3M USA SDSs are available at www.3M.com

Date Printed: 9/4/2014 Page 1 / 7

Safety Data Sheet



* Trusted Quality Since 1921 * www.rustoleum.com

1. Identification

Product Name: HPERF LSPR 6PK STRIPE BLUE STRIPING Revision Date: 9/4/2014

Product Identifier: 2326838 Supercedes Date: New SDS

Product Use/Class: Striping Paint/Aerosols

Supplier: Rust-Oleum Corporation Manufacturer: Rust-Oleum Corporation 11 Hawthorn Parkway 11 Hawthorn Parkway

11 Hawthorn Parkway Vernon Hills, IL 60061

USA

Vernon Hills, IL 60061 USA

Preparer: Regulatory Department

Emergency Telephone: 24 Hour Hotline: 847-367-7700

2. Hazard Identification

EMERGENCY OVERVIEW: Harmful if swallowed. Extremely flammable liquid and vapor. Vapors may cause flash fire or explosion. Contents Under Pressure. Harmful if inhaled. May affect the brain or nervous system causing dizziness, headache or nausea. May cause eye, skin, or respiratory tract irritation. KEEP OUT OF REACH OF CHILDREN. Harmful if inhaled. Causes eye irritation. Use ventilation necessary to keep exposures below recommended exposure limits, if any. Vapor Harmful. Causes Eye, Skin, Nose, and Throat Irritation.

Classification

Symbol(s) of Product







Signal Word Danger

GHS HAZARD STATEMENTS

Flammable Aerosol, category 1 H222 Extremely flammable aerosol. H224 Flammable Liquid, category 1 Extremely flammable liquid and vapour. Acute Toxicity, Oral, category 5 H303 May be harmful if swallowed. May be harmful in contact with skin. Acute Toxicity, Dermal, category 5 H313 Skin Irritation, category 2 H315 Causes skin irritation. Eye Irritation, category 2 H319 Causes serious eye irritation. Acute Toxicity, Inhalation, category 4 H332 Harmful if inhaled. H335 STOT, single exposure, category 3, RTI May cause respiratory irritation.

STOT, single exposure, category 3, NE H336 May cause drowsiness or dizziness.

Aspiration Hazard, category 2 H305 May be harmful if swallowed and enters airways.

Eye Irritation, category 2B H320 Causes eye irritation.

Flammable Aerosol, category 1 H280 Contains gas under pressure; may explode if heated

GHS PRECAUTIONARY STATEMENTS

P211 Do not spray on an open flame or other ignition source. P220 Keep/Store away from clothing/.../combustible materials. Date Printed: 9/4/2014 Page 2 / 7

P235 Keep cool.

P251 Pressurized container: Do not pierce or burn, even after use.

P375 Fight fire remotely due to the risk of explosion.

P102 Keep out of reach of children.
P103 Read label before use.

P202 Do not handle until all safety precautions have been read and understood.

P234 Keep only in original container.

P260 Do not breathe dust/fume/gas/mist/vapours/spray.
P261 Avoid breathing dust/fume/gas/mist/vapours/spray.
P262 Do not get in eyes, on skin, or on clothing.

P264 Wash ... thoroughly after handling.

P270 Do not eat, drink or smoke when using this product.
P271 Use only outdoors or in a well-ventilated area.

P273 Avoid release to the environment.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

P281 Use personal protective equipment as required.

P285 In case of inadequate ventilation wear respiratory protection.
P312 Call a POISON CENTER or doctor/physician if you feel unwell.

P351 Rinse cautiously with water for several minutes.

P374 Fight fire with normal precautions from a reasonable distance.

P402 Store in a dry place.

P210 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
P410+P412 Protect from sunlight. Do no expose to temperatures exceeding 50°C/ 122°F.

P240 Ground/bond container and receiving equipment.

P241 Use explosion-proof electrical/ventilating/lighting/.../ equipment.

P242 Use only non-sparking tools.

P243 Take precautionary measures against static discharge.

P303+P361+P353 IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin

with water/shower.

P370+P378 In case of fire: Use ... for extinction.

P403+P235 Store in a well-ventilated place. Keep cool.

P501 Dispose of contents/container to ...
P321 Specific treatment (see ... on this label).
P352 Wash with plenty of soap and water.

P362 Take off contaminated clothing and wash before reuse. P332+P313 If skin irritation occurs: Get medical advice/attention.

P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if

present and easy to do. Continue rinsing.

P337+P313 If eye irritation persists: Get medical advice/attention.

P304+P340 IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for

breathing.

P405 Store locked up.

P403+P233 Store in a well-ventilated place. Keep container tightly closed. P302+P350 IF ON SKIN: Gently wash with plenty of soap and water.

3. Composition/Information On Ingredients

HAZARDOUS SUBSTANCES

<u>Chemical Name</u>	CAS-No.	<u>Wt.%</u> Range	GHS Symbols	GHS Statements
Limestone	1317-65-3	25-50		
Liquefied Petroleum Gas	68476-86-8	10-25		
Aliphatic Hydrocarbon	64742-89-8	2.5-10		
Titanium Dioxide	13463-67-7	2.5-10		
Toluene	108-88-3	2.5-10	GHS02-GHS07	H225-302-332
Naphtha, Petroleum, Hydrotreated Light	64742-49-0	2.5-10		
Acetone	67-64-1	2.5-10	GHS02	H225
Mineral Spirits	64742-88-7	2.5-10	GHS06	H331

Date Printed: 9/4/2014 Page 3 / 7

Xylene	1330-20-7	1.0-2.5	GHS02	H226
Solvent Naptha, Light Aromatic	64742-95-6	1.0-2.5		
1,2,4-Trimethylbenzene	95-63-6	1.0-2.5	GHS02	H226
Ethylbenzene	100-41-4	0.1-1.0	GHS02-GHS07	H225-332

The text for GHS Hazard Statements shown above (if any) is given in the "16. Other Information" section.

4. First-aid Measures

FIRST AID - EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 minutes holding eyelids open. Get medical attention. Do NOT allow rubbing of eyes or keeping eyes closed.

FIRST AID - SKIN CONTACT: Wash skin with soap and water. Remove contaminated clothing. Get medical attention if irritation develops or persists.

FIRST AID - INHALATION: If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately. Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention. Do NOT use mouth-to-mouth resuscitation.

FIRST AID - INGESTION: Aspiration hazard: Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. Get immediate medical attention. If swallowed, get medical attention.

5. Fire-fighting Measures

EXTINGUISHING MEDIA:

Alcohol Film Forming Foam, Carbon Dioxide, Dry Chemical, Water Fog

UNUSUAL FIRE AND EXPLOSION HAZARDS: FLASH POINT IS LESS THAN 20 °. F. - EXTREMELY FLAMMABLE LIQUID AND VAPOR! Water spray may be ineffective. Closed containers may explode when exposed to extreme heat. Vapors may form explosive mixtures with air. Vapors can travel to a source of ignition and flash back. Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Perforation of the pressurized container may cause bursting of the can. Closed containers may explode when exposed to extreme heat due to buildup of steam. No unusual fire or explosion hazards noted.

SPECIAL FIREFIGHTING PROCEDURES: Evacuate area and fight fire from a safe distance. Full protective equipment including self-contained breathing apparatus should be used. Water may be used to cool closed containers to prevent pressure buildup and possible autoignition or explosion. Use water spray to keep fire-exposed containers cool. Containers may explode when heated.

Accidental Release Measures

STEPS TO BE TAKEN IF MATERIAL IS RELEASED OR SPILLED: Contain spilled liquid with sand or earth. DO NOT use combustible materials such as sawdust. Remove all sources of ignition, ventilate area and remove with inert absorbent and non-sparking tools. Dispose of according to local, state (provincial) and federal regulations. Do not incinerate closed containers. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Ventilate area, isolate spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal regulations.

7. Handling and Storage

HANDLING: Wash thoroughly after handling. Wash hands before eating. Use only in a well-ventilated area. Follow all MSDS/label precautions even after container is emptied because it may retain product residues. Avoid breathing fumes, vapors, or mist. Remove contaminated clothing and launder before reuse. Use only with adequate ventilation. Avoid contact with eyes, skin and clothing. STORAGE: Keep containers tightly closed. Isolate from heat, electrical equipment, sparks and open flame. Contents under pressure. Do not store above 120 ° F. Store large quantities in buildings designed and protected for storage of NFPA Class I flammable liquids. Contents under pressure. Do not expose to heat or store above 120 ° F. Product should be stored in tightly sealed containers and protected from heat, moisture, and foreign materials. Store in a dry, well ventilated place. Keep container tightly closed when not in use. Keep away from heat, sparks, flame and sources of ignition. Avoid excess heat.

8. Exposure Controls/Personal Protection

Chemical Name	CAS-No.	Weight % Less Than	ACGIH TLV- TWA	ACGIH TLV- STEL	OSHA PEL-TWA	OSHA PEL- CEILING
Limestone	1317-65-3	30.0	5 mg/m3 (NIOSH, Respirable Dust)	N.E.	15 mg/m3 [Total Dust]	N.E.
Liquefied Petroleum Gas	68476-86-8	25.0	N.E.	N.E.	N.E.	N.E.
Aliphatic Hydrocarbon	64742-89-8	10.0	100 ppm	N.E.	100 ppm	N.E.
Titanium Dioxide	13463-67-7	10.0	10 mg/m3	N.E.	15 mg/m3 [Total Dust]	N.E.

Date Printed: 9/4/2014 Page 4 / 7

Toluene	108-88-3	10.0	20 ppm	N.E.	200 ppm	300 ppm
Naphtha, Petroleum,	64742-49-0	5.0	200 mg/m3	N.E.	N.E.	N.E.
Hydrotreated Light	04742-49-0	5.0	200 mg/m3	IN.⊑.	IN.⊑.	IN.⊑.
Acetone	67-64-1	5.0	500 ppm	750 ppm	1000 ppm	N.E.
Mineral Spirits	64742-88-7	5.0	100 ppm	N.E.	100 ppm	N.E.
Xylene	1330-20-7	5.0	100 ppm	150 ppm	100 ppm	N.E.
Solvent Naptha, Light Aromatic	64742-95-6	5.0	N.E.	N.E.	N.E.	N.E.
1,2,4-Trimethylbenzene	95-63-6	5.0	25 ppm	N.E.	N.E.	N.E.
Ethylbenzene	100-41-4	1.0	20 ppm	125 ppm	100 ppm	N.E.

PERSONAL PROTECTION

ENGINEERING CONTROLS: Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Prevent build-up of vapors by opening all doors and windows to achieve cross-ventilation. Provide general dilution of local exhaust ventilation in volume and pattern to keep TLV of hazardous ingredients below acceptable limits.

RESPIRATORY PROTECTION: A respiratory protection program that meets OSHA 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. A NIOSH/MSHA approved air purifying respirator with organic vapor cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

SKIN PROTECTION: Use impervious gloves to prevent skin contact and absorption of this material through the skin. Nitrile or Neoprene gloves may afford adequate skin protection. Use gloves to prevent prolonged skin contact.

EYE PROTECTION: Use safety eyewear designed to protect against splash of liquids.

OTHER PROTECTIVE EQUIPMENT: Refer to safety supervisor or industrial hygienist for further information regarding personal protective equipment and its application. Refer to safety supervisor or industrial hygienist for further guidance regarding types of personal protective equipment and their applications.

HYGIENIC PRACTICES: Wash thoroughly with soap and water before eating, drinking or smoking. Remove contaminated clothing immediately and launder before reuse.

water:

Explosive Limits, vol%:

Flash Point, °C:

No Information

No Information

0.7 - 13.0

-105

9. Physical and Chemical Properties

Appearance: **Physical State:** Aerosolized Mist Liauid Odor: Odor Threshold: Solvent Like N.E. **Relative Density:** pH: 0.957 N.A. Freeze Point, °C: Viscosity: N.D. N.D. Partition Coefficient, n-octanol/

Solubility in Water: Slight

Decompostion Temp., °C: No Information

Boiling Range, °C: -34 - 415

Flammability: Supports Combustion

Evaporation Rate: Auto-ignition Temp., °C: Faster than Ether

Vapor Density: Vapor Pressure: Heavier than Air N.D.

(See "Other information" Section for abbreviation legend)

10. Stability and Reactivity

CONDITIONS TO AVOID: Avoid temperatures above 120 ° F. Avoid all possible sources of ignition. Avoid contact with strong acid and strong bases.

INCOMPATIBILITY: Incompatible with strong oxidizing agents, strong acids and strong alkalies.

HAZARDOUS DECOMPOSITION: By open flame, carbon monoxide and carbon dioxide. When heated to decomposition, it emits acrid smoke and irritating fumes. Contains solvents which may form carbon monoxide, carbon dioxide, and formaldehyde.

HAZARDOUS POLYMERIZATION: Will not occur under normal conditions.

STABILITY: This product is stable under normal storage conditions.

11. Toxicological information

EFFECTS OF OVEREXPOSURE - EYE CONTACT: Causes Serious Eye Irritation

EFFECTS OF OVEREXPOSURE - SKIN CONTACT: May be absorbed through the skin in harmful amounts. Substance may cause slight skin irritation. Prolonged or repeated contact may cause skin irritation. May cause skin irritation. Allergic reactions are possible.

EFFECTS OF OVEREXPOSURE - INHALATION: Harmful if inhaled. High gas, vapor, mist or dust concentrations may be harmful if inhaled. Avoid breathing fumes, spray, vapors, or mist. High vapor concentrations are irritating to the eyes, nose, throat and lungs.

Date Printed: 9/4/2014 Page 5 / 7

Prolonged or excessive inhalation may cause respiratory tract irritation.

EFFECTS OF OVEREXPOSURE - INGESTION: Aspiration hazard if swallowed; can enter lungs and cause damage. Harmful if swallowed.

EFFECTS OF OVEREXPOSURE - CHRONIC HAZARDS: IARC lists Ethylbenzene as a possible human carcinogen (group 2B). Overexposure to xylene in laboratory animals has been associated with liver abnormalities, kidney, lung, spleen, eye and blood damage as well as reproductive disorders. Effects in humans, due to chronic overexposure, have included liver, cardiac abnormalities and nervous system damage. Contains Titanium Dioxide. Titanium Dioxide is listed as a Group 2B-"Possibly carcinogenic to humans" by IARC. No significant exposure to Titanium Dioxide is thought to occur during the use of products in which Titanium Dioxide is bound to other materials, such as in paints during brush application or drying. Risk of overexposure depends on duration and level of exposure to dust from repeated sanding of surfaces or spray mist and the actual concentration of Titanium Dioxide in the formula. (Ref: IARC Monograph, Vol. 93, 2010)May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion, and blurred vision) and/or damage. Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis, and blurred vision) and/or damage.

PRIMARY ROUTE(S) OF ENTRY: Eye Contact, Ingestion, Inhalation, Skin Absorption, Skin Contact

ACUTE TOXICITY VALUES

The acute effects of this product have not been tested. Data on individual components are tabulated below:

CAS-No.	Chemical Name	Oral LD50	Dermal LD50	Vapor LC50
64742-89-8	Aliphatic Hydrocarbon	N.I.	3000 mg/kg Rabbit	N.I.
13463-67-7	Titanium Dioxide	>10000 mg/kg Rat	N.I.	N.I.
108-88-3	Toluene	636 mg/kg Rat	8390 mg/kg Rabbit	12.5 mg/L Rat
64742-49-0	Naphtha, Petroleum, Hydrotreated Light	>5000 mg/kg Rat	>3160 mg/kg Rabbit	N.I.
64742-88-7	Mineral Spirits	>5000 mg/kg Rat	3000 mg/kg Rabbit	>5.28 mg/L Rat
1330-20-7	Xylene	4300 mg/kg Rat	N.I.	47635 mg/L Rat
64742-95-6	Solvent Naptha, Light Aromatic	N.I.	>2000 mg/kg Rabbit	N.I.
95-63-6	1,2,4-Trimethylbenzene	3280 mg/kg Rat	>3160 mg/kg Rabbit	N.I.
100-41-4	Ethylbenzene	3500 mg/kg Rat	15354 mg/kg Rabbit	17.2 mg/L Rat

N.I. - No Information

12. Ecological Information

ECOLOGICAL INFORMATION: Product is a mixture of listed components. Product is a mixture of listed components.

13. Disposal Information

DISPOSAL INFORMATION: Dispose of material in accordance to local, state, and federal regulations and ordinances. Do not allow to enter waterways, wastewater, soil, storm drains or sewer systems.

14. Transport Information

	Domestic (USDOT)	International (IMDG)	<u>Air (IATA)</u>	TDG (Canada)
UN Number:	N.A.	1950	1950	N.A.
Proper Shipping Name:	Paint Products in Limited Quantities	Aerosols	Aerosols	Paint Products in Limited Quantities
Hazard Class:	N.A.	2.1	2.1	N.A.
Packing Group:	N.A.	N.A.	N.A.	N.A.
Limited Quantity:	Yes	Yes	Yes	Yes

15. Regulatory Information

Date Printed: 9/4/2014 Page 6 / 7

U.S. Federal Regulations:

CERCLA - SARA Hazard Category

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendment and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

Fire Hazard, Pressure Hazard, Acute Health Hazard, Chronic Health Hazard

Sara Section 313:

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendment and Reauthorization Act of 1986 and 40 CFR part 372:

 Chemical Name
 CAS-No.

 Toluene
 108-88-3

 Xylene
 1330-20-7

 1,2,4-Trimethylbenzene
 95-63-6

 Ethylbenzene
 100-41-4

Toxic Substances Control Act:

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(B) if exported from the United States:

No TSCA components exist in this product.

Inventory Information

Value Country USA (TSCA) No Information Canada (DSL) No Information Mexico(INSQ) No Information No Information Europe (EINECS) Japan (ENCS) No Information Philippines (PICCS) No Information China (IECSC) No Information No Information Australia (AICS) Korea (KECI) No Information New Zealand (NZIOC) No Information

No Information

CALIFORNIA PROPOSITION 65:

Warning: This products contains a substance known to the State of California to cause cancer.

Chemical NameCAS-No.Titanium Dioxide13463-67-7Ethylbenzene100-41-4

CALIFORNIA PROPOSITION 65 REPRODUCTIVE TOXINS

Warning: This product contains a substance known to the State of California to cause birth defects or other reproductive harm.

Chemical NameCAS-No.Toluene108-88-3

International Regulations:

CANADIAN WHMIS:

This SDS has been prepared in compliance with Controlled Product Regulations except for the use of the 16 headings.

Date Printed: 9/4/2014 Page 7 / 7

16. Other Information

HMIS RATINGS

Health: 2* Flammability: 4 Physical Hazard: 0 Personal Protection: X

CANADIAN WHMIS CLASS: B2 D2A

NFPA RATINGS

Health: 2 Flammability: 4 Instability 0

VOLATILE ORGANIC COMPOUNDS, g/L: 518

MSDS REVISION DATE: 9/4/2014

REASON FOR REVISION: No Information

Legend: N.A. - Not Applicable, N.E. - Not Established, N.D. - Not Determined

Text for GHS Hazard Statements shown in Section 3 describing each ingredient:

H225 Highly flammable liquid and vapour.
H226 Flammable liquid and vapour.
H302 Harmful if swallowed.
H331 Toxic if inhaled.
H332 Harmful if inhaled.

Icons for GHS Pictograms shown in Section 3 describing each ingredient:



Rust-Oleum Corporation believes, to the best of its knowledge, information and belief, the information contained herein to be accurate and reliable as of the date of this safety data sheet. However, because the conditions of handling, use, and storage of these materials are beyond our control, we assume no responsibility or liability for personal injury or property damage incurred by the use of these materials. Rust-Oleum Corporation makes no warranty, expressed or implied, regarding the accuracy or reliability of the data or results obtained from their use. All materials may present unknown hazards and should be used with caution. The information and recommendations in this material safety data sheet are offered for the users' consideration and examination. It is the responsibility of the user to determine the final suitability of this information and to comply with all applicable international, federal, state, and local laws and regulations.



Revision Date: 25 Nov 2014

Page 1 of 10

SAFETY DATA SHEET

SECTION 1

PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: MOBIL DTE OIL LIGHT
Product Description: Base Oil and Additives

Product Code: 201560501560, 600148-00, 970294

Intended Use: Turbine oil

COMPANY IDENTIFICATION

Supplier: EXXON MOBIL CORPORATION

3225 GALLOWS RD.

FAIRFAX, VA. 22037 USA

24 Hour Health Emergency 609-737-4411

Transportation Emergency Phone 800-424-9300 or 703-527-3887 CHEMTREC

Product Technical Information 800-662-4525, 800-947-9147

MSDS Internet Address http://www.exxon.com, http://www.mobil.com

SECTION 2

HAZARDS IDENTIFICATION

This material is not hazardous according to regulatory guidelines (see (M)SDS Section 15).

Other hazard information:

HAZARD NOT OTHERWISE CLASSIFIED (HNOC): None as defined under 29 CFR 1900.1200.

PHYSICAL / CHEMICAL HAZARDS

No significant hazards.

HEALTH HAZARDS

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

ENVIRONMENTAL HAZARDS

No significant hazards.

NFPA Hazard ID: Health: 0 Flammability: 1 Reactivity: 0 HMIS Hazard ID: Health: 0 Flammability: 1 Reactivity: 0

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.



Revision Date: 25 Nov 2014

Page 2 of 10

SECTION 3

COMPOSITION / INFORMATION ON INGREDIENTS

This material is defined as a mixture.

Hazardous Substance(s) or Complex Substance(s) required for disclosure

Name	CAS#	Concentration*	GHS Hazard Codes
2,6-DI-TERT-BUTYLPHENOL	128-39-2	0.1 - < 1%	H315, H319(2A),
			H400(M factor 1),
			H410(M factor 1)

^{*} All concentrations are percent by weight unless material is a gas. Gas concentrations are in percent by volume.

As per paragraph (i) of 29 CFR 1910.1200, formulation is considered a trade secret and specific chemical identity and exact percentage (concentration) of composition may have been withheld. Specific chemical identity and exact percentage composition will be provided to health professionals, employees, or designated representatives in accordance with applicable provisions of paragraph (i).

SECTION 4

FIRST AID MEASURES

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

SECTION 5

FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO2) to extinguish flames.

Inappropriate Extinguishing Media: Straight Streams of Water

FIRE FIGHTING



Revision Date: 25 Nov 2014

Page 3 of 10

Fire Fighting Instructions: Evacuate area. Prevent runoff from fire control or dilution from entering streams, sewers, or drinking water supply. Firefighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Oxides of carbon, Smoke, Fume, Incomplete combustion products, Sulfur oxides, Aldehydes

FLAMMABILITY PROPERTIES

Flash Point [Method]: >200°C (392°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6

ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. US regulations require reporting releases of this material to the environment which exceed the applicable reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

PROTECTIVE MEASURES

Avoid contact with spilled material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

SPILL MANAGEMENT

Land Spill: Stop leak if you can do it without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do it without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dike far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways,



Revision Date: 25 Nov 2014

Page 4 of 10

sewers, basements or confined areas.

SECTION 7

HANDLING AND STORAGE

HANDLING

Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source). When the material is handled in bulk, an electrical spark could ignite any flammable vapors from liquids or residues that may be present (e.g., during switch-loading operations). Use proper bonding and/or ground procedures. However, bonding and grounds may not eliminate the hazard from static accumulation. Consult local applicable standards for guidance. Additional references include American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practice on Static Electricity) or CENELEC CLC/TR 50404 (Electrostatics - Code of practice for the avoidance of hazards due to static electricity).

Static Accumulator: This material is a static accumulator.

STORAGE

The container choice, for example storage vessel, may effect static accumulation and dissipation. Do not store in open or unlabelled containers. Keep away from incompatible materials.

SECTION 8

EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure limits/standards for materials that can be formed when handling this product: When mists/aerosols can occur the following are recommended: 5 mg/m³ - ACGIH TLV (inhalable fraction), 5 mg/m³ - OSHA PEL.

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

No biological limits allocated.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.



Revision Date: 25 Nov 2014

Page 5 of 10

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapor warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practice good housekeeping.

ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

SECTION 9

PHYSICAL AND CHEMICAL PROPERTIES

Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

GENERAL INFORMATION

Physical State: Liquid

Color: Amber
Odor: Characteristic
Odor Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 °C): 0.869 Flammability (Solid, Gas): N/A

Flash Point [Method]: >200°C (392°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

Boiling Point / Range: > 316°C (600°F) **Decomposition Temperature:** N/D **Vapor Density (Air = 1):** > 2 at 101 kPa

Vapor Pressure: < 0.013 kPa (0.1 mm Hg) at 20 °C Evaporation Rate (n-butyl acetate = 1): N/D



Revision Date: 25 Nov 2014

Page 6 of 10

pH: N/A

Log Pow (n-Octanol/Water Partition Coefficient): > 3.5

Solubility in Water: Negligible

Viscosity: 31 cSt (31 mm2/sec) at 40 °C | 5.5 cSt (5.5 mm2/sec) at 100 °C

Oxidizing Properties: See Hazards Identification Section.

OTHER INFORMATION

Freezing Point: N/D Melting Point: N/A

Pour Point: -18°C (0°F)

DMSO Extract (mineral oil only), IP-346: < 3 %wt

SECTION 10 STABILITY AND REACTIVITY

REACTIVITY: See sub-sections below.

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

MATERIALS TO AVOID: Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

POSSIBILITY OF HAZARDOUS REACTIONS: Hazardous polymerization will not occur.

SECTION 11 TOXICOLOGICAL INFORMATION

INFORMATION ON TOXICOLOGICAL EFFECTS

Hazard Class	Conclusion / Remarks
Inhalation	
Acute Toxicity: No end point data for	Minimally Toxic. Based on assessment of the components.
material.	
Irritation: No end point data for material.	Negligible hazard at ambient/normal handling temperatures.
Ingestion	
Acute Toxicity: No end point data for	Minimally Toxic. Based on assessment of the components.
material.	
Skin	
Acute Toxicity: No end point data for	Minimally Toxic. Based on assessment of the components.
material.	
Skin Corrosion/Irritation: No end point data	Negligible irritation to skin at ambient temperatures. Based on
for material.	assessment of the components.
Eye	
Serious Eye Damage/Irritation: No end point	May cause mild, short-lasting discomfort to eyes. Based on
data for material.	assessment of the components.
Sensitization	
Respiratory Sensitization: No end point data	Not expected to be a respiratory sensitizer.
for material.	
Skin Sensitization: No end point data for	Not expected to be a skin sensitizer. Based on assessment of the
material.	components.
Aspiration: Data available.	Not expected to be an aspiration hazard. Based on



Revision Date: 25 Nov 2014

Page 7 of 10

physico-chemical properties of the material. Germ Cell Mutagenicity: No end point data Not expected to be a germ cell mutagen. Based on assessment of for material. the components. Carcinogenicity: No end point data for Not expected to cause cancer. Based on assessment of the material. components. Reproductive Toxicity: No end point data Not expected to be a reproductive toxicant. Based on assessment for material. of the components. Lactation: No end point data for material. Not expected to cause harm to breast-fed children. Specific Target Organ Toxicity (STOT) Single Exposure: No end point data for Not expected to cause organ damage from a single exposure. material.

OTHER INFORMATION

Repeated Exposure: No end point data for

Contains:

material.

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitizing in test animals.

Not expected to cause organ damage from prolonged or repeated

exposure. Based on assessment of the components.

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

1 = NTP CARC 3 = IARC 1 5 = IARC 2B 2 = NTP SUS 4 = IARC 2A 6 = OSHA CARC

SECTION 12 ECOLOGICAL INFORMATION

The information given is based on data available for the material, the components of the material, and similar materials.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land. Expected to partition to sediment and wastewater solids.

PERSISTENCE AND DEGRADABILITY

Biodegradation:

Base oil component -- Expected to be inherently biodegradable

BIOACCUMULATION POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.



Revision Date: 25 Nov 2014

Page 8 of 10

SECTION 13

DISPOSAL CONSIDERATIONS

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products. Protect the environment. Dispose of used oil at designated sites. Minimize skin contact. Do not mix used oils with solvents, brake fluids or coolants.

REGULATORY DISPOSAL INFORMATION

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrositivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

SECTION 14 TRANSPORT INFORMATION

LAND (DOT): Not Regulated for Land Transport

LAND (TDG): Not Regulated for Land Transport

SEA (IMDG): Not Regulated for Sea Transport according to IMDG-Code

Marine Pollutant: No

AIR (IATA): Not Regulated for Air Transport

SECTION 15

REGULATORY INFORMATION



Revision Date: 25 Nov 2014

Page 9 of 10

OSHA HAZARD COMMUNICATION STANDARD: This material is not considered hazardous in accordance with OSHA HazCom 2012, 29 CFR 1910.1200.

Listed or exempt from listing/notification on the following chemical inventories: AICS, DSL, IECSC, PICCS,

TSCA

EPCRA SECTION 302: This material contains no extremely hazardous substances.

SARA (311/312) REPORTABLE HAZARD CATEGORIES: None.

SARA (313) TOXIC RELEASE INVENTORY: This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

The following ingredients are cited on the lists below:

Chemical Name	CAS Number	List Citations
PHOSPHORODITHOIC ACID, O,O-DI C1-14-ALKYL ESTERS, ZINC SALTS (2:1) (ZDDP)	68649-42-3	15

-- REGULATORY LISTS SEARCHED--

1 = ACGIH ALL	6 = TSCA 5a2	11 = CA P65 REPRO	16 = MN RTK
2 = ACGIH A1	7 = TSCA 5e	12 = CA RTK	17 = NJ RTK
3 = ACGIH A2	8 = TSCA 6	13 = IL RTK	18 = PA RTK
4 = OSHA Z	9 = TSCA 12b	14 = LA RTK	19 = RI RTK
5 = TSCA 4	10 = CA P65 CARC	15 = MI 293	

Code key: CARC=Carcinogen; REPRO=Reproductive

OFOTION 40	OTHER INCORMATION	
SECTION 16	OTHER INFORMATION	

N/D = Not determined, N/A = Not applicable

KEY TO THE H-CODES CONTAINED IN SECTION 3 OF THIS DOCUMENT (for information only):

H315: Causes skin irritation; Skin Corr/Irritation, Cat 2

H319(2A): Causes serious eve irritation; Serious Eve Damage/Irr, Cat 2A

H400: Very toxic to aquatic life; Acute Env Tox, Cat 1

H410: Very toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 1

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

Updates made in accordance with implementation of GHS requirements.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate



Revision Date: 25 Nov 2014

Page 10 of 10

and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

Internal Use Only

MHC: 0B, 0B, 0, 0, 0, 0 PPEC: A

DGN: 2007057XUS (538877)

Copyright 2002 Exxon Mobil Corporation, All rights reserved

Page: 1
Printed: 04/20/2015
Revision: 04/20/2015

Supersedes Revision: 09/08/2014

1. PRODUCT AND COMPANY IDENTIFICATION

Product Name: Klean Strip Paint Thinner

Company Name: W. M. Barr Phone Number:

2105 Channel Avenue (901)775-0100

Memphis, TN 38113

Web site address: www.wmbarr.com

Emergency Contact: 3E 24 Hour Emergency Contact (800)451-8346 **Information:** W.M. Barr Customer Service (800)398-3892

Intended Use: Paint, stain, and varnish thinning.

Synonyms: CKPT94402, GKPT94002B, DKPT94403CA, EKPT94401, GKPT94002, GKPT94002P,

GKPT94002T, GKPT94400, GPT1KS, PA12779, QKPT94003, QKPT94203, QPT1KS,

GKPTDP

Additional Information This product is regulated by the United States Consumer Product Safety Commission

and is subject to certain labeling requirements under the Federal Hazardous Substances Act. These requirements differ from the classification criteria and hazard information required for safety data sheets (SDS). The product label also includes other important information, including directions for use, and should always be read in its entirety prior to

using the product.

2. HAZARDS IDENTIFICATION

Flammable Liquids, Category 3

Skin Corrosion/Irritation, Category 2

Serious Eye Damage/Eye Irritation, Category 2B

Toxic To Reproduction, Category 2

Specific Target Organ Toxicity (single exposure), Category 3

Specific Target Organ Toxicity (repeated exposure), Category 2

Aspiration Toxicity, Category 1







GHS Signal Word: Danger

GHS Hazard Phrases: H226: Flammable liquid and vapor.

H304: May be fatal if swallowed and enters airways.

H315: Causes skin irritation. H320: Causes eye irritation.

H335: May cause respiratory irritation. H336: May cause drowsiness or dizziness.

H361: Suspected of damaging fertility or the unborn child if inhaled.

H373: May cause damage to cardiovascular sytem and central nervous system through

prolonged or repeated exposure.

GHS Precaution Phrases: P201: Obtain special instructions before use.

P202: Do not handle until all safety precautions have been read and understood. P210: Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P233: Keep container tightly closed.

P240: Ground/bond container and receiving equipment.

P241: Use explosion-proof electrical/ventilating/lighting equipment.

P242: Use only non-sparking tools.

P243: Take precautionary measures against static discharge.

P260: Do not breathe gas/mist/vapors/spray. P264: Wash hands thoroughly after handling.

Licensed to W.M. Barr and Company: MIRS MSDS, (c) A V Systems, Inc.

Page: 2 Printed: 04/20/2015 Revision: 04/20/2015

Supersedes Revision: 09/08/2014

P271: Use only outdoors or in a well-ventilated area.

P280: Wear protective gloves/protective clothing/eye protection/face protection.

P281: Use personal protective equipment as required.

P235: Keep cool.

GHS Response Phrases:

P301+310: IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

P302+352: IF ON SKIN: Wash with plenty of soap and water.

P303+361+353: IF ON SKIN (or hair): Remove/take off immediately all contaminated

clothing. Rinse skin with water/shower.

P304+340: IF INHALED: Remove victim to fresh air and keep at rest in a position

comfortable for breathing.

P305+351+338: IF IN EYES: Rinse cautiously with water for several minutes. Remove

contact lenses, if present and easy to do. Continue rinsing.

P308+313: IF exposed or concerned: Get medical attention/advice.

P312: Call a POISON CENTER or doctor/physician if you feel unwell.

P314: Get medical attention/advice if you feel unwell.

P321: Specific treatment see label.

P331: Do NOT induce vomiting.

P332+313: If skin irritation occurs, get medical advice/attention.

P337+313: If eye irritation persists, get medical advice/attention. P362: Take off contaminated clothing and wash before re-use.

P370+378: In case of fire, use dry chemical powder to extinguish.

GHS Storage and Disposal

P403+233: Store container tightly closed in well-ventilated place. P405: Store locked up.

Phrases:

P501: Dispose of contents/container according to local, state and federal regulations.

Hazard Rating System:





HMIS:

OSHA Regulatory Status:

This material is classified as hazardous under OSHA regulations.

Potential Health Effects (Acute and Chronic):

Inhalation Acute Exposure Effects:

May cause dizziness; headache; watering of eyes; eye irritation; weakness; nausea; muscle twitches, and depression of central nervous system. Severe overexposure may cause convulsions; unconsciousness; and death. Intentional misuse of this product by deliberately concentrating and inhaling can be harmful or fatal.

Skin Contact Acute Exposure Effects:

May cause irritation; numbness in the fingers and arms; drying of skin; and dermatitis. May cause increased severity of symptoms listed under inhalation.

Eye Contact Acute Exposure Effects:

This material is an eye irritant. May cause irritation; burns; conjunctivitis of eyes; and corneal ulcerations of the eye. Vapors may irritate eyes.

Ingestion Acute Exposure Effects:

Harmful or fatal if swallowed. May cause nausea; weakness; muscle twitches; gastrointestinal irritation; and diarrhea. Severe overexposure may cause convulsions; unconsciousness; and death.

Chronic Exposure Effects:

Reports have associated repeated and prolonged overexposure to solvents with neurological and other physiological damage. Prolonged or repeated contact may cause

Licensed to W.M. Barr and Company: MIRS MSDS, (c) A V Systems, Inc.

Page: 3
Printed: 04/20/2015
Revision: 04/20/2015

Supersedes Revision: 09/08/2014

dermatitis. May cause jaundice; bone marrow damage; liver damage; anemia; and skin irritation.

Medical Conditions Generally Diseases of the skin, eyes, liver, kidneys, central nervous system and respiratory

Aggravated By Exposure: system.

3. COMPOSITION/INFORMATION ON INGREDIENTS

CAS#	Hazardous Components (Chemical Name)	Concentration	RTECS #
64742-47-8	Hydrotreated light distillate (petroleum)	<=100.0 %	OA5504000
64742-82-1	Naphtha (petroleum), hydrodesulfurized heavy	<=100.0 %	NA
8052-41-3	Stoddard solvent {Mineral spirits; Aliphatic Petroleum Distillates; White spirits}	<=95.0 %	WJ8925000
25550-14-5	Benzene, Ethylmethyl-	<=1.5 %	NA
25551-13-7	Benzene, Trimethyl-	<=1.5 %	DC3220000
95-63-6	1,2,4-Trimethylbenzene {Pseudocumene}	<=1.0 %	DC3325000
1330-20-7	Xylene (mixed isomers) {Benzene, dimethyl-}	<=1.0 %	ZE2100000
103-65-1	Benzene, Propyl- {N-Propylbenzene}	<=1.0 %	DA8750000

Additional Chemical

Ingredients vary due to multiple blends and/or raw material suppliers

nformation

4. FIRST AID MEASURES

Emergency and First Aid Procedures:

Inhalation:

If user experiences breathing difficulty, move to air free of vapors, Administer oxygen or artificial medical assistance can be rendered.

Skin Contact:

Wash with soap and large quantities of water and seek medical attention if irritation from contact persists.

Eye Contact:

Flush with large quantities of water for at least 15 minutes and seek immediate medical attention.

Ingestion:

Do not induce vomiting. Call your local poison control center, hospital emergency room or physician immediately for instructions to induce vomiting.

If spontaneous vomiting is about to occur, place victim's head below knees. If victim is drowsy or unconscious, place on the left side with head down. Never give anything by mouth to a person who is not fully conscious. Do not leave victim unattended. Seek medical attention immediately.

Signs and Symptoms Of

Inhalation, ingestion, and dermal are possible routes of exposure.

Exposure:

Note to Physician:

Call your local poison control center for further information.

Inhalation: Inhalation overexposure can produce toxic effects. Monitor for respiratory distress. If cough or difficulty in breathing develops, evaluate for upper respiratory tract inflammation, bronchitis, and pneumonitis. Administer supplemental oxygen with assisted ventilation as required.

Ingestion: If ingested, this material presents a significant aspiration and chemical

Licensed to W.M. Barr and Company: MIRS MSDS, (c) A V Systems, Inc.

Page: 4
Printed: 04/20/2015
Revision: 04/20/2015

Supersedes Revision: 09/08/2014

pneumonitis hazard. Induction of emesis is not recommended. Consider activated charcoal and/or gastric lavage. If patient is obtunded, protect the airway by cuffed endotracheal intubation or by placement of the body in a Trendelenburg and left lateral decubitus position.

5. FIRE FIGHTING MEASURES

NFPA Class II

Flash Pt: > 100.00 F

Explosive Limits: LEL: 0.5 UEL: 6

Autoignition Pt: No data.

Suitable Extinguishing Media: Use carbon dioxide, dry chemical powder, or foam.

Fire Fighting Instructions: Self-contained respiratory protection should be provided for fire fighters fighting fires in

buildings or confined areas. Storage containers exposed to fire should be kept cool with water spray to prevent pressure build-up. Stay away from heads of containers that have

been exposed to intense heat or flame.

Flammable Properties and

Hazards:

Combustible Liquid.

6. ACCIDENTAL RELEASE MEASURES

Steps To Be Taken In Case Material Is Released Or Spilled: Clean up:

Keep unnecessary people away; isolate hazard area and deny entry. Stay upwind, out of low areas, and ventilate closed spaces before entering. Shut off ignition sources; keep flares, smoking or flames out of hazard area.

Small spills:

Take up with sand, earth or other noncombustible absorbent material and place in a plastic container where applicable.

Large spills:

Dike far ahead of spill for later disposal.

Waste Disposal:

Dispose in accordance with applicable local, state and federal regulations.

7. HANDLING AND STORAGE

Precautions To Be Taken in Handling:

Read carefully all cautions and directions on product label before use. Since empty container retains residue, follow all label warnings even after container is empty. Dispose of empty container according to all regulations. Do not reuse this container.

A static electrical charge can accumulate when this material is flowing through pipes, nozzles or filters, and when it is agitated. A static spark discharge can ignite accumulated vapors particularly during dry weather conditions. Always use proper bonding and grounding procedures.

Precautions To Be Taken in

Storing:

Keep container tightly closed when not in use. Store in a cool, dry place. Do not store

near flames or at elevated temperatures.

Page: 5
Printed: 04/20/2015
Revision: 04/20/2015

Supersedes Revision: 09/08/2014

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

ı					
	CAS#	Partial Chemical Name	OSHA TWA	ACGIH TWA	Other Limits
	64742-47-8	Hydrotreated light distillate (petroleum)	No data.	TLV: 200 mg/m3	No data.
	64742-82-1	Naphtha (petroleum), hydrodesulfurized heavy	No data.	No data.	No data.
	8052-41-3	Stoddard solvent {Mineral spirits; Aliphatic Petroleum Distillates; White spirits}	PEL: 500 ppm	TLV: 100 ppm	No data.
l	25550-14-5	Benzene, Ethylmethyl-	No data.	No data.	No data.
l	25551-13-7	Benzene, Trimethyl-	No data.	TLV: 25 ppm	No data.
	95-63-6	1,2,4-Trimethylbenzene {Pseudocumene}	No data.	No data.	No data.
	1330-20-7	Xylene (mixed isomers) {Benzene, dimethyl-}	PEL: 100 ppm	TLV: 100 ppm STEL: 150 ppm	No data.
	103-65-1	Benzene, Propyl- {N-Propylbenzene}	No data.	No data.	No data.

Respiratory Equipment

(Specify Type):

For OSHA controlled work place and other regular users. Use only with adequate ventilation under engineered air control systems designed to prevent exceeding

appropriate TLV. For occasional use, where engineered air control is not feasible, use properly maintained and properly fitted NIOSH approved respirator for organic solvent

vapors. A dust mask does not provide protection against vapors.

Eye Protection: Safety glasses, goggles or face shields are recommended to safeguard against potential

eye contact, irritation, or injury. Contact lenses should not be worn while working with

chemicals.

Protective Gloves: Wear impermeable gloves. Gloves contaminated with product should be discarded.

Promptly remove clothing that becomes soiled with product.

Other Protective Clothing: Various application methods can dictate use of additional protective safety equipment,

such as impermeable aprons, etc., to minimize exposure. Before reuse, thoroughly clean any clothing or protective equipment that has been contaminated by prior use. Discard any clothing or other protective equipment that cannot be decontaminated, such

as gloves or shoes.

Engineering Controls

(Ventilation etc.):

Use only with adequate ventilation to prevent build-up of vapors. Open all windows and doors. Use only with a cross ventilation of moving fresh air across the work area. If strong odor is noticed or you experience slight dizziness, headache, nausea, or

eye-watering - Stop - ventilation is inadequate. Leave area immediately.

Work/Hygienic/Maintenance

Practices:

A source of clean water should be available in the work area for flushing eyes and skin.

Do not eat, drink, or smoke in the work area.

Wash hands thoroughly after use.

Page: 6
Printed: 04/20/2015
Revision: 04/20/2015

Supersedes Revision: 09/08/2014

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical States: [] Gas [X] Liquid [] Solid

Appearance and Odor: Water White / Free and Clear

Melting Point: No data.

Boiling Point: 318.00 F - 385.00 F

Autoignition Pt: No data.

Flash Pt: > 100.00 F

Explosive Limits: LEL: 0.5 UEL: 6

Specific Gravity (Water = 1): 0.78

Vapor Pressure (vs. Air or 0.3 MM HG at 68.0 F

mm Hg):

Vapor Density (vs. Air = 1): 5 Air = 1 Evaporation Rate: No data. Solubility in Water: No data.

Solubility Notes: Very slightly soluble in cold water.

Percent Volatile: 100.0 % by weight. VOC / Volume: 778.0000 G/L

10. STABILITY AND REACTIVITY

Stability: Unstable [] Stable [X]

Conditions To Avoid -

Instability:

No data available.

Incompatibility - Materials To Incompatible with strong acids, alkalies, and oxidizers such as liquid chlorine and

Avoid: oxygen.

Hazardous Decomposition Or Decomposition may produce carbon monoxide and carbon dioxide.

Byproducts:

Possibility of Hazardous

Reactions:

Will occur [] Will not occur [X]

Conditions To Avoid - No data available.

Hazardous Reactions:

11. TOXICOLOGICAL INFORMATION

Toxicological Information: Refer to section 2 for acute and chronic effects.

CAS# 25551-13-7:

Standard Draize Test, Skin, Species: Rabbit, 500.0 MG, 24 H, Moderate.

Result:

Kidney, Ureter, Bladder: Changes in liver weight.

Endocrine: Changes in thymus weight.

Immunological Including Allergic: Decreased immune response.

- "Sbornik Vysledku Toxixologickeho Vysetreni Latek A Pripravku," , Institut Pro Vychovu Vedoucicn P, Marhold, J.V., Institut Pro Vychovu Vedoucicn, Pracovniku Chemickeho,

Prumyclu Praha Czechoslovakia, Vol/p/yr: -,24, 1972

Standard Draize Test, Eyes, Species: Rabbit, 500.0 MG, 24 H, Mild.

Result:

Kidney, Ureter, Bladder: Changes in liver weight. Kidney, Ureter, Bladder: Changes in bladder weight.

Nutritional and Gross Metabolic: Weight loss or decreased weight gain.

- "Sbornik Vysledku Toxixologickeho Vysetreni Latek A Pripravku,", Institut Pro Vychovu Vedoucicn P, Marhold, J.V., Institut Pro Vychovu Vedoucicn, Pracovniku Chemickeho,

Licensed to W.M. Barr and Company: MIRS MSDS, (c) A V Systems, Inc.

Page: 7
Printed: 04/20/2015
Revision: 04/20/2015

Supersedes Revision: 09/08/2014

Prumyclu Praha Czechoslovakia, Vol/p/yr: -,24, 1972

CAS# 1330-20-7:

Acute toxicity, LC50, Inhalation, Rat, 5000. PPM, 4 H.

Result:

Behavioral: Muscle contraction or spasticity. Lungs, Thorax, or Respiration:Other changes.

- Raw Material Data Handbook, Vol.1: Organic Solvents, 1974., National Assoc. of Printing Ink Research Institute, Francis McDonald Sinclair Memorial Labor, Lehigh Univ., Bethlehem, PA 18015, Vol/p/yr: 1,123, 1974

Standard Draize Test, Eyes, Species: Rabbit, 5.000 MG, 24 H, Severe.

Result:

Behavioral: General anesthetic.

Behavioral: Somnolence (general depressed activity).

Behavioral: Irritability.

- "Sbornik Vysledku Toxixologickeho Vysetreni Latek A Pripravku,", Institut Pro Vychovu Vedoucicn P, Marhold, J.V., Institut Pro Vychovu Vedoucicn, Pracovniku Chemickeho, Prumyclu Praha Czechoslovakia, Vol/p/yr: -,24, 1972

CAS#	Hazardous Components (Chemical Name)	NTP	IARC	ACGIH	OSHA
64742-47-8	Hydrotreated light distillate (petroleum)	n.a.	n.a.	A4	n.a.
64742-82-1	Naphtha (petroleum), hydrodesulfurized heavy	n.a.	n.a.	n.a.	n.a.
8052-41-3	Stoddard solvent {Mineral spirits; Aliphatic Petroleum Distillates; White spirits}	n.a.	n.a.	n.a.	n.a.
25550-14-5	Benzene, Ethylmethyl-	n.a.	n.a.	n.a.	n.a.
25551-13-7	Benzene, Trimethyl-	n.a.	n.a.	n.a.	n.a.
95-63-6	1,2,4-Trimethylbenzene {Pseudocumene}	n.a.	n.a.	n.a.	n.a.
1330-20-7	Xylene (mixed isomers) {Benzene, dimethyl-}	n.a.	3	A4	n.a.
103-65-1	Benzene, Propyl- {N-Propylbenzene}	n.a.	n.a.	n.a.	n.a.

12. ECOLOGICAL INFORMATION

No data available.

13. DISPOSAL CONSIDERATIONS

Waste Disposal Method: Dispose in accordance with federal, state, and local regulations.

Page: 8 Printed: 04/20/2015 Revision: 04/20/2015

Supersedes Revision: 09/08/2014

14. TRANSPORT INFORMATION

LAND TRANSPORT (US DOT):

DOT Proper Shipping Name: Paint Related Material, Exempt Combustible Liquid per 49 CFR 173.150(f)

DOT Hazard Class: UN/NA Number:

Additional Transport

Information:

The supplier may apply one of the following exceptions: Combustible Liquid, Consumer Commodity, Limited Quantity, Viscous Liquid, Does Not Sustain Combustion, or others, as allowed under 49CFR Hazmat Regulations. Please consult 49CFR Subchapter C to ensure that subsequent shipments comply with these exceptions.

15. REGULATORY INFORMATION

EPA SARA (Superfund Amendments and Reauthorization Act of 1986) Lists						
CAS#	Hazardous Compo	nents (Chemica	l Name)	S. 302 (EHS)	S. 304 RQ	S. 313 (TRI)
64742-47-8	Hydrotreated light di	istillate (petroleur	m)	No	No	No
64742-82-1	Naphtha (petroleum), hydrodesulfuriz	zed heavy	No	No	No
8052-41-3	Stoddard solvent {N Petroleum Distillates	•	iphatic	No	No	No
25550-14-5	Benzene, Ethylmeth	ıyl-		No	No	No
25551-13-7	Benzene, Trimethyl-	•		No	No	No
95-63-6	1,2,4-Trimethylbenz	ene {Pseudocun	nene}	No	No	Yes
1330-20-7	Xylene (mixed isome	ers) {Benzene, c	limethyl-}	No	Yes 100 LB	Yes
103-65-1	Benzene, Propyl- {N	N-Propylbenzene	}	No	No	No
	gories' defined [Xe III Sections [Xe III Sections [Xe III Sections [Xe III Sections [Xe III Section [Xe III Se	(] Yes [] No (] Yes [] No (] Yes [] No] Yes [X] No] Yes [X] No	Chronic (dela Fire Hazard	diate) Health Haza ayed) Health Haza ease of Pressure H zard	rd	

CAS#	Hazardous Components (Chemical Name)	Other US EPA or State Lists
64742-47-8	Hydrotreated light distillate (petroleum)	CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No
64742-82-1	Naphtha (petroleum), hydrodesulfurized heavy	CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No
8052-41-3	Stoddard solvent {Mineral spirits; Aliphatic Petroleum Distillates; White spirits}	CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No
25550-14-5	Benzene, Ethylmethyl-	CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory, 4 Test; CA PROP.65: No
25551-13-7	Benzene, Trimethyl-	CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No
95-63-6	1,2,4-Trimethylbenzene {Pseudocumene}	CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory; CA PROP.65: No
1330-20-7	Xylene (mixed isomers) {Benzene, dimethyl-}	CAA HAP,ODC: HAP; CWA NPDES: Yes; TSCA: Yes - Inventory; CA PROP.65: No
103-65-1	Benzene, Propyl- {N-Propylbenzene}	CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes - Inventory, 12(b); CA PROP.65: No

Page: 9
Printed: 04/20/2015
Revision: 04/20/2015
Supersedes Revision: 09/08/2014

Regulatory Information

Statement:

All components of this material are listed on the TSCA Inventory or are exempt.

16. OTHER INFORMATION

Revision Date: 04/20/2015

Preparer Name: W.M. Barr and Company, Inc. (901)775-0100

Additional Information About No data available.

This Product:

Company Policy or

Disclaimer:

The information contained herein is presented in good faith and believed to be accurate as of the effective date shown above. This information is furnished without warranty of any kind. Employers should use this information only as a supplement to other information gathered by them and must make independent determination of suitability and completeness of information from all sources to assure proper use of these materials and the safety and health of employees. Any use of this data and information must be determined by the user to be in accordance with applicable federal, state and local laws and regulations.

Licensed to W.M. Barr and Company: MIRS MSDS, (c) A V Systems, Inc.

Page: 1 Printed: 04/13/2015 Revision: 04/13/2015 Supersedes Revision: 09/10/2014

1. PRODUCT AND COMPANY IDENTIFICATION

Klean Strip Denatured Alcohol Product Name:

W. M. Barr **Phone Number:** Company Name:

2105 Channel Avenue (901)775-0100

Memphis, TN 38113

Web site address: www.wmbarr.com

3E 24 Hour Emergency Contact **Emergency Contact:** (800)451-8346 Information: W.M. Barr Customer Service (800)398-3892

Intended Use: Cleans glass and is used as a fuel for marine stoves

CSL26, GSL26, QSL26, QSL26W Synonyms:

This product is regulated by the United States Consumer Product Safety Commission Additional Information

> and is subject to certain labeling requirements under the Federal Hazardous Substances Act. These requirements differ from the classification criteria and hazard information required for safety data sheets (SDS). The product label also includes other important information, including directions for use, and should always be read in its entirety prior to

using the product.

2. HAZARDS IDENTIFICATION

Flammable Liquids, Category 2 Acute Toxicity: Oral, Category 3 Acute Toxicity: Skin, Category 3 Acute Toxicity: Inhalation, Category 3

Specific Target Organ Toxicity (single exposure), Category 1







GHS Signal Word: Danger

H225: Highly flammable liquid and vapor. **GHS Hazard Phrases:**

H301: Toxic if swallowed.

H311: Toxic in contact with skin.

H331: Toxic if inhaled.

H370: Causes damage to organs.

GHS Precaution Phrases: P210: Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P233: Keep container tightly closed.

P240: Ground/bond container and receiving equipment.

P241: Use explosion-proof electrical/ventilating/lighting equipment.

P242: Use only non-sparking tools.

P243: Take precautionary measures against static discharge.

P260: Do not breathe gas/mist/vapors/spray. P264: Wash hands thoroughly after handling.

P270: Do not eat, drink or smoke when using this product.

P271: Use only outdoors or in a well-ventilated area.

P280: Wear protective gloves/protective clothing/eye protection/face protection.

P235: Keep cool.

P301+310: IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. **GHS Response Phrases:**

P302+352: IF ON SKIN: Wash with plenty of soap and water.

P303+361+353: IF ON SKIN (or hair): Remove/take off immediately all contaminated

clothing. Rinse skin with water/shower.

P304+340: IF INHALED: Remove victim to fresh air and keep at rest in a position

comfortable for breathing.

Licensed to W.M. Barr and Company: MIRS MSDS, (c) A V Systems, Inc. **GHS** format

Page: 2 Printed: 04/13/2015 Revision: 04/13/2015

Supersedes Revision: 09/10/2014

P307+311: IF exposed: Call a POISON CENTER or doctor/physician.

P311: Call a POISON CENTER or doctor/physician.

P330: Rinse mouth.

P361: Remove/Take off immediately all contaminated clothing.

P363: Wash contaminated clothing before reuse.

P370+378: In case of fire, use dry chemical powder to extinguish. P403+233: Store container tightly closed in well-ventilated place.

GHS Storage and Disposal

Phrases:

P405: Store locked up.

P501: Dispose of contents/container to local, state and federal regulations.

Hazard Rating System:





HMIS:

OSHA Regulatory Status:

This material is classified as hazardous under OSHA regulations.

Potential Health Effects (Acute and Chronic):

Inhalation Acute Exposure Effects:

Vapor harmful. May cause dizziness, headache, watering of eyes, irritation of respiratory tract, irritation to the eyes, drowsiness, nausea, other central nervous system effects, spotted or blurry vision, dilation of pupils, and convulsions.

Skin Contact Acute Exposure Effects:

May cause irritation, drying of skin, redness, and dermatitis. May cause symptoms listed under inhalation. May be absorbed through damaged skin.

Eye Contact Acute Exposure Effects:

May cause irritation.

Ingestion Acute Exposure Effects:

Poison. Cannot be made non-poisonous. May be fatal or cause blindness. May produce fluid in the lungs and pulmonary edema. May cause dizziness, headache, nausea, drowsiness, loss of coordination, stupor, reddening of face and or neck, liver, kidney and heart damage, coma, and death. May produce symptoms listed under inhalation.

Chronic Exposure Effects:

May cause symptoms listed under inhalation, dizziness, fatigue, tremors, permanent central nervous system changes, blindness, pancreatic damage, and death.

Target Organs:

Liver, kidneys, pancreas, heart, lungs, brain, central nervous system, eyes

Aggravated By Exposure:

Medical Conditions Generally Diseases of the liver, skin, lung, kidney, central nervous system, pancreas, and heart; asthma; inflammatory or fibrotic pulmonary disease; any preexisting condition sensitive to a decrease in available oxygen, such as chronic lung disease, coronary artery disease, or anemias

Page: 3 Printed: 04/13/2015 Revision: 04/13/2015

Supersedes Revision: 09/10/2014

3. COMPOSITION/INFORMATION ON INGREDIENTS

CAS# **Hazardous Components (Chemical Name)** Concentration RTECS# 64-17-5 30.0 -50.0 % Ethyl alcohol {Ethanol} KQ6300000 67-56-1 Methanol {Methyl alcohol; Carbinol; Wood 40.0 -60.0 % PC1400000

alcohol}

Additional Chemical

nformation

Specific percentage of composition is being withheld as a trade secret.

4. FIRST AID MEASURES

Emergency and First Aid

Procedures:

Skin:

Immediately begin washing the skin thoroughly with large amounts of water and mild soap, if available, while removing contaminated clothing. Seek medical attention if irritation persists.

Eyes:

Immediately begin to flush eyes with water, remove any contact lens. Continue to flush the eyes for at least 15 minutes, then seek immediate medical attention.

Inhalation:

Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention.

Ingestion:

If swallowed, do NOT induce vomiting. Seek immediate medical attention. Call a physician, hospital emergency room, or poison control center immediately. Never give

anything by mouth to an unconscious person.

Signs and Symptoms Of

Exposure:

See Potential Health Affects

Note to Physician:

Poison. This product contains methanol. Methanol is metabolized to formaldehyde and formic acid. These metabolites may cause metabolic acidosis, visual disturbances and blindness. Since metabolism is required for these toxic symptoms, their onset may be delayed from 6 to 30 hours following ingestion. Ethanol competes for the same metabolic pathway and has been used as an antidote. Methanol is effectively removed by hemodialysis. Call your local poison control center for further instructions.

5. FIRE FIGHTING MEASURES

OSHA Class IB

Flash Pt: 45.00 F Method Used: Setaflash Closed Cup (Rapid Setaflash)

UEL: No data. **Explosive Limits:** LEL: No data.

No data. **Autoignition Pt:**

Suitable Extinguishing Media: Use carbon dioxide, dry powder, or alcohol resistant foam.

Unsuitable Extinguishing

Water may be ineffective. Solid streams of water will likely spread the fire.

Media:

Fire Fighting Instructions: Self-contained respiratory protection should be provided for fire fighters fighting fires in

> buildings or confined area. Storage containers exposed to fire should be kept cool with water spray to prevent pressure build-up. Stay away from heads of containers that have

been exposed to intense heat or flame.

Flammable Properties and

Hazards:

Vapors are heavier than air. Vapor may travel considerable distance to source of ignition

and flash back.

Licensed to W.M. Barr and Company: MIRS MSDS, (c) A V Systems, Inc.

Page: 4
Printed: 04/13/2015
Revision: 04/13/2015
Supersedes Revision: 09/10/2014

Flammability Classification:

6. ACCIDENTAL RELEASE MEASURES

Steps To Be Taken In Case Material Is Released Or Spilled: Vapors are heavier than air. Vapors may cause flash fire or ignite explosively.

Clean up: Keep unnecessary people away; isolate hazard area and deny entry. Stay upwind, out of low areas, and ventilate closed spaces before entering. Shut off ignition sources; keep flares, smoking or flames out of hazard area. Use non-sparking tools. Use proper bonding and grounding methods for all equipment and processes. Keep out of waterways and bodies of water. Be cautious of vapors collecting in small enclosed spaces, sewers, low lying areas, confined spaces, etc.

Small spills: Take up with sand, earth or other noncombustible absorbent material and place in a plastic container where applicable.

Large spills: Dike far ahead of spill for later disposal.

Waste Disposal: Dispose in accordance with applicable local, state and federal regulations.

7. HANDLING AND STORAGE

Precautions To Be Taken in Handling:

Read carefully all cautions and directions on product label before use. Since empty container retains residue, follow all label warnings even after container is empty. Dispose of empty container according to all regulations. Do not reuse this container.

Do not use this product near any source of heat or open flame, furnace areas, pilot lights, stoves, etc.

Do not use in small enclosed spaces, such as basements and bathrooms where vapors can accumulate. Vapors can accumulate and explode if ignited.

Do not use this product if the work area is not well ventilated. Use only with adequate ventilation to prevent build up of vapors.

Do not spread this product over large surface areas because fire and health safety risks will increase dramatically.

Use proper bonding and grounding when transferring material. Be aware of static electricity generation when handling material.

Precautions To Be Taken in Storing:

Keep container tightly closed when not in use. Store in a cool, dry place. Do not store near any source of heat or open flame, furnace areas, pilot lights, stoves, etc.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Page: 5 Printed: 04/13/2015 Revision: 04/13/2015

Supersedes Revision: 09/10/2014

CAS#	Partial Chemical Name	OSHA TWA	ACGIH TWA	Other Limits
64-17-5	Ethyl alcohol {Ethanol}	PEL: 1000 ppm	TLV: 1000 ppm	No data.
67-56-1	Methanol {Methyl alcohol; Carbinol; Wood alcohol}	PEL: 200 ppm	TLV: 200 ppm STEL: 250 ppm	No data.

Respiratory Equipment (Specify Type):

For use in areas with inadequate ventilation or fresh air, wear a properly maintained and properly fitted NIOSH approved respirator for organic solvent vapors.

For OSHA controlled work places and other regular users - Use only with adequate ventilation under engineered air control systems designed to prevent exceeding the appropriate TLV.

A dust mask does not provide protection against vapors.

Eye Protection: Chemical splash goggles should be worn to prevent eye contact.

Protective Gloves: Wear gloves with as much resistance to the chemical ingredients as possible. Glove

materials such as nitrile, natural rubber, and neoprene will provide protection. Glove selection should be based on chemicals being used and conditions of use. Consult your glove supplier for additional information. Gloves contaminated with product should be

discarded and not reused.

Other Protective Clothing: Various application methods can dictate the use of additional protective safety

equipment, such as impermeable aprons, etc., to minimize exposure.

Engineering Controls (Ventilation etc.):

Use process enclosures, local exhaust ventilation, or other engineering controls to

control airborne levels below recommended exposure limits.

Use only with adequate ventilation to prevent buildup of vapors. Do not use in areas where vapors can accumulate and concentrate, such as basements, bathrooms or small enclosed areas. Whenever possible, use outdoors in an open air area. If using indoors open all windows and doors and maintain a cross ventilation of moving fresh air across the work area. If strong odor is noticed or you experience slight dizziness, headache, nausea or eye-watering -- STOP -- ventilation is inadequate. Leave area immediately and move to fresh air.

Practices:

Work/Hygienic/Maintenance Wash hands thoroughly after use and before eating, drinking, smoking, or using the restroom.

Do not eat, drink, or smoke in the work area.

Discard any clothing or other protective equipment that cannot be decontaminated.

Facilities storing or handling this material should be equipped with an emergency eyewash and safety shower.

Page: 6
Printed: 04/13/2015
Revision: 04/13/2015
Supersedes Revision: 09/10/2014

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical States: [] Gas [X] Liquid [] Solid

Appearance and Odor: Water white, alcohol odor

Melting Point:No data.Boiling Point:147.00 FAutoignition Pt:No data.

Flash Pt: 45.00 F Method Used: Setaflash Closed Cup (Rapid Setaflash)

Explosive Limits: LEL: No data. UEL: No data.

Specific Gravity (Water = 1): 0.7934 - 0.8108 **Density:** 6.646 LB/GL

Vapor Pressure (vs. Air or

76 MM HG at 68.0 F

mm Hg):

Vapor Density (vs. Air = 1): > 1
Evaporation Rate: > 1
Solubility in Water: No data.

Percent Volatile: 100.0 % by weight. VOC / Volume: 793.0000 G/L

10. STABILITY AND REACTIVITY

Stability: Unstable [] Stable [X]

Conditions To Avoid -

No data available.

Instability:

Incompatibility - Materials To Incompatible with strong oxidizing agents, strong acids, reactive metals, halogens,

Avoid: strong inorganic acids, and aldehydes.

Hazardous Decomposition Or Decomposition may produce carbon monoxide and carbon dioxide.

Byproducts:

Possibility of Hazardous Will occur [] Will not occur [X]

Reactions:

Conditions To Avoid - No data available.

Hazardous Reactions:

11. TOXICOLOGICAL INFORMATION

Toxicological Information: This product has not been tested as a whole. Refer to section 2 for acute and chronic

effects.

Carcinogenicity/Other

IARC 1 - Carcinogenic to Humans

Information:

IARC 2B - Possibly Carcinogenic to Humans

ACGIH A4 - Not Classifiable as a Human Carcinogen.

IARC has determined that the consumption of alcoholic beverages is casually related to the occurrence of malignant tumors of the oral cavity, pharynx, larynx, esophagus, and liver in humans. The carcinogenic response attributed to drinking alcoholic beverages has not be verified in studies with laboratory animals. Established uses of denatured ethanol and non-beverage use of pure ethanol are not considered to pose any significant

cancer hazard.

Page: 7
Printed: 04/13/2015
Revision: 04/13/2015

Supersedes Revision: 09/10/2014

CAS#	Hazardous Components (Chemical Name)	NTP	IARC	ACGIH	OSHA
64-17-5	Ethyl alcohol {Ethanol}	n.a.	1	A4	n.a.
67-56-1	Methanol {Methyl alcohol; Carbinol; Wood alcohol}	n.a.	n.a.	n.a.	n.a.

12. ECOLOGICAL INFORMATION

General Ecological

Information:

This product has not been tested as a whole.

13. DISPOSAL CONSIDERATIONS

Waste Disposal Method: Dispose in accordance with applicable local, state, and federal regulations.

14. TRANSPORT INFORMATION

LAND TRANSPORT (US DOT):

DOT Proper Shipping Name: Alcohols, n.o.s. (Ethyl Alcohol, Methanol) **DOT Hazard Class:** 3 FLAMMABLE LIQUID

UN/NA Number: UN1987 Packing Group: II



Additional Transport

Information:

The shipper / supplier may apply one of the following exceptions: Combustible Liquid, Consumer Commodity, Limited Quantity, Viscous Liquid, Does Not Sustain Combustion,

or others, as allowed under 49CFR Hazmat Regulations. Please consult 49CFR Subchapter C to ensure that subsequent shipments comply with these exceptions.

15. REGULATORY INFORMATION

EPA SARA (Superfund Amendments and Reauthorization Act of 1986) Lists

CAS#	Hazardous Components (Chemical Name)	S. 302 (EHS)	S. 304 RQ	S. 313 (TRI)
64-17-5	Ethyl alcohol {Ethanol}	No	No	No
67-56-1	Methanol {Methyl alcohol; Carbinol; Wood	No	Yes 5000 LB	Yes

alcohol}

This material meets the EPA [X] Yes [] No Acute (immediate) Health Hazard **'Hazard Categories' defined** [X] Yes [] No Chronic (delayed) Health Hazard

for SARA Title III Sections [X] Yes [] No Fire Hazard

311/312 as indicated: [] Yes [X] No Sudden Release of Pressure Hazard

[] Yes [X] No Reactive Hazard

CAS#	Hazardous Components (Chemical Name)	Other US EPA or State Lists
64-17-5	Ethyl alcohol {Ethanol}	CAA HAP,ODC: No; CWA NPDES: No; TSCA: Yes -
		Inventory; CA PROP.65: No
67-56-1	Methanol {Methyl alcohol; Carbinol; Wood	CAA HAP,ODC: HAP; CWA NPDES: No; TSCA: Yes -
	alcohol}	Inventory; CA PROP.65: Yes

Page: 8
Printed: 04/13/2015
Revision: 04/13/2015
Supersedes Revision: 09/10/2014

Regulatory Information

Statement:

All components of this material are listed on the TSCA Inventory or are exempt.

16. OTHER INFORMATION

Revision Date: 04/13/2015

Preparer Name: W.M. Barr EHS Dept (901)775-0100

Additional Information About No data available.

This Product:

Company Policy or

Disclaimer:

The information contained herein is presented in good faith and believed to be accurate as of the effective date shown above. This information is furnished without warranty of any kind. Employers should use this information only as a supplement to other information gathered by them and must make independent determination of suitability and completeness of information from all sources to assure proper use of these materials and the safety and health of employees. Any use of this data and information must be determined by the user to be in accordance with applicable federal, state and local laws and regulations.

Licensed to W.M. Barr and Company: MIRS MSDS, (c) A V Systems, Inc.

SAFETY DATA SHEET



A00725 ICM WHT LTHM GRS ICA725 16net11

Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Material name : A00725 ICM WHT LTHM GRS ICA725 16net11

Material number : 00000000001026140

Manufacturer or supplier's details

Company : Zep Inc.

Address : 1310 Seaboard Industrial Blvd., NW

Atlanta, GA 30318

Telephone : 404-352-1680

Emergency telephone numbers

For SDS Information : Compliance Services 1-877-428-9937

For a Medical Emergency : 877-541-2016 Toll Free - All Calls Recorded
For a Transportation : CHEMTREC: 800-424-9300 - All Calls Recorded.

Emergency In the District of Columbia 202-483-7616

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	Aerosol containing a liquefied gas
Colour	white
Odour	solvent-like

GHS Classification

Flammable aerosols : Category 1
Gases under pressure : Liquefied gas
Skin irritation : Category 2
Eye irritation : Category 2A

Specific target organ toxicity - : Category 3 (Central nervous system)

single exposure

GHS Label element

Hazard pictograms :







Signal word : Danger

Hazard statements : H222 Extremely flammable aerosol.

H280 Contains gas under pressure; may explode if heated.

H315 Causes skin irritation.

H319 Causes serious eye irritation. H336 May cause drowsiness or dizziness.

Precautionary statements : **Prevention:**

P210 Keep away from heat, hot surfaces, sparks, open flames



A00725 ICM WHT LTHM GRS ICA725 16net11

Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

and other ignition sources. No smoking.

P211 Do not spray on an open flame or other ignition source. P251 Pressurized container: Do not pierce or burn, even after use.

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264 Wash skin thoroughly after handling.

P271 Use only outdoors or in a well-ventilated area.

P280 Wear eye protection/ face protection.

P280 Wear protective gloves.

Response:

P302 + P352 IF ON SKIN: Wash with plenty of soap and water. P304 + P340 + P312 IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell. P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P332 + P313 If skin irritation occurs: Get medical advice/ attention.

P337 + P313 If eye irritation persists: Get medical advice/ attention.

P362 Take off contaminated clothing and wash before reuse.

Storage:

P403 + P233 Store in a well-ventilated place. Keep container tightly closed.

P405 Store locked up.

P410 + P412 Protect from sunlight. Do not expose to temperatures exceeding 50 °C/ 122 °F.

Disposal:

P501 Dispose of contents/container in accordance with local regulation.

Potential Health Effects

Carcinogenicity:

IARC No component of this product present at levels greater than or

equal to 0.1% is identified as probable, possible or confirmed

human carcinogen by IARC.

ACGIH No component of this product present at levels greater than or

equal to 0.1% is identified as a carcinogen or potential

carcinogen by ACGIH.

OSHA No component of this product present at levels greater than or

equal to 0.1% is identified as a carcinogen or potential

carcinogen by OSHA.

NTP No component of this product present at levels greater than or

equal to 0.1% is identified as a known or anticipated carcinogen

by NTP.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Hazardous components

Chemical Name	CAS-No.	Concentration [%]
---------------	---------	-------------------



Version 1.0	Revision Date	03/11/2015	Print Date 03/02/2016
Distillates (petroleum), hydrotrea	ated light	64742-47-8	>= 20 - < 30
acetone		67-64-1	>= 10 - < 20
Heptane, branched, cyclic and I	near	426260-76-6	>= 10 - < 20
propane		74-98-6	>= 10 - < 20
butane		106-97-8	>= 10 - < 20

SECTION 4. FIRST AID MEASURES

General advice : Move out of dangerous area.

Show this safety data sheet to the doctor in attendance.

Do not leave the victim unattended.

If inhaled : Consult a physician after significant exposure.

If unconscious place in recovery position and seek medical

advice.

In case of skin contact : Wash off immediately with plenty of water for at least 15

minutes.

If on clothes, remove clothes.

If skin irritation persists, call a physician.

In case of eye contact : Remove contact lenses.

Protect unharmed eye.

Keep eye wide open while rinsing.

If eye irritation persists, consult a specialist. If in eyes, rinse with water for 15 minutes.

If swallowed : Keep respiratory tract clear.

Never give anything by mouth to an unconscious person.

If symptoms persist, call a physician.

DO NOT induce vomiting unless directed to do so by a

physician or poison control center.

SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media : Alcohol-resistant foam

Carbon dioxide (CO2)

Dry chemical

Unsuitable extinguishing

media

: High volume water jet

Specific hazards during

firefighting

: Do not allow run-off from fire fighting to enter drains or water

courses.

Hazardous combustion

products

: Carbon dioxide (CO2) Carbon monoxide

Smoke

Specific extinguishing

methods

: Use extinguishing measures that are appropriate to local

circumstances and the surrounding environment.

Further information : Collect contaminated fire extinguishing water separately. This

must not be discharged into drains.

Fire residues and contaminated fire extinguishing water must



Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

be disposed of in accordance with local regulations. For safety reasons in case of fire, cans should be stored

separately in closed containments.

Use a water spray to cool fully closed containers.

Special protective equipment

for firefighters

: Wear self-contained breathing apparatus for firefighting if

necessary.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.

Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas.

Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions

: Prevent product from entering drains.

Prevent further leakage or spillage if safe to do so.

If the product contaminates rivers and lakes or drains inform

respective authorities.

Methods and materials for containment and cleaning up

: Sweep up or vacuum up spillage and collect in suitable

container for disposal.

Soak up with inert absorbent material (e.g. sand, silica gel,

acid binder, universal binder, sawdust).

SECTION 7. HANDLING AND STORAGE

Advice on safe handling : For personal protection see section 8.

Smoking, eating and drinking should be prohibited in the

application area.

Take precautionary measures against static discharges. Provide sufficient air exchange and/or exhaust in work rooms. Open drum carefully as content may be under pressure. Dispose of rinse water in accordance with local and national

regulations.

Always replace cap after use.

Do not breathe vapours or spray mist.

Conditions for safe storage : BEWARE: Aerosol is pressurized. Keep away from direct sun

exposure and temperatures over 50 °C. Do not open by force or throw into fire even after use. Do not spray on flames or

red-hot objects. No smoking.

Observe label precautions.

Electrical installations / working materials must comply with

the technological safety standards.

Keep in a dry, cool and well-ventilated place.

Materials to avoid : Oxidizing agents



Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
Distillates (petroleum), hydrotreated light	64742-47-8	TWA	500 ppm 2,000 mg/m3	OSHA Z-1
		TWA	400 ppm 1,600 mg/m3	OSHA P0
acetone	67-64-1	TWA	500 ppm	ACGIH
		STEL	750 ppm	ACGIH
		TWA	250 ppm 590 mg/m3	NIOSH REL
		TWA	1,000 ppm 2,400 mg/m3	OSHA Z-1
		TWA	750 ppm 1,800 mg/m3	OSHA P0
		STEL	1,000 ppm 2,400 mg/m3	OSHA P0
Heptane, branched, cyclic and linear	426260-76-6	TWA	85 ppm 350 mg/m3	NIOSH REL
		С	440 ppm 1,800 mg/m3	NIOSH REL
		TWA	500 ppm 2,000 mg/m3	OSHA Z-1
		TWA	400 ppm 1,600 mg/m3	OSHA P0
		STEL	500 ppm 2,000 mg/m3	OSHA P0
propane	74-98-6	TWA	1,000 ppm	ACGIH
		TWA	1,000 ppm 1,800 mg/m3	NIOSH REL
		TWA	1,000 ppm 1,800 mg/m3	OSHA Z-1
		TWA	1,000 ppm 1,800 mg/m3	OSHA P0
butane	106-97-8	TWA	800 ppm 1,900 mg/m3	NIOSH REL
		TWA	800 ppm 1,900 mg/m3	OSHA P0

Biological occupational exposure limits

Component	CAS-No.	Control	Biological	Sampling	Permissible	Basis
		parameters	specimen	time	concentration	
2-PROPANONE	67-64-1	Acetone	Urine	End of	50 mg/l	ACGIH BEI
				shift (As		
				soon as		
				possible		
				after		
				exposure		
				ceases)		



Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

Personal protective equipment

Respiratory protection : In case of insufficient ventilation, wear suitable respiratory

Hand protection

Remarks The suitability for a specific workplace should be discussed

with the producers of the protective gloves.

Eye protection : Eye wash bottle with pure water

Tightly fitting safety goggles

Wear face-shield and protective suit for abnormal processing

problems.

Skin and body protection impervious clothing

Choose body protection according to the amount and

concentration of the dangerous substance at the work place.

Wash hands before breaks and at the end of workday. Hygiene measures

> When using do not smoke. When using do not eat or drink.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance : Aerosol containing a liquefied gas

Colour white

Odour solvent-like pΗ not applicable

Melting point/freezing point no data available Boiling point not applicable

Flash point

not applicable

Evaporation rate : no data available

Flammability (solid, gas) Extremely flammable aerosol.

Upper explosion limit no data available Lower explosion limit no data available Vapour pressure no data available

Density : 0.77 g/cm3

Solubility(ies)

Water solubility partly soluble Partition coefficient: nno data available

octanol/water

Auto-ignition temperature : not determined Thermal decomposition no data available

SAFETY DATA SHEET



A00725 ICM WHT LTHM GRS ICA725 16net11

Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

Viscosity

Viscosity, kinematic : no data available

Heat of combustion : 32.91 kJ/g

SECTION 10. STABILITY AND REACTIVITY

Reactivity : Stable

Chemical stability : Stable under normal conditions.

Possibility of hazardous

reactions

: No decomposition if stored and applied as directed.

Vapours may form explosive mixture with air.

Conditions to avoid : Heat, flames and sparks.

Extremes of temperature and direct sunlight.

Incompatible materials : Oxidizing agents

Oxygen

Hazardous decomposition

products

: Carbon oxides

SECTION 11. TOXICOLOGICAL INFORMATION

Acute toxicity

Components:

Distillates (petroleum), hydrotreated light:

Acute oral toxicity : LD50 rat: > 5,000 mg/kg

Acute inhalation toxicity : LC50 rat: > 4.6 mg/l

Exposure time: 6 h

Acute dermal toxicity : LD50 rat: > 2,000 mg/kg

acetone:

Acute oral toxicity : LD50 rat: 5,800 mg/kg

Acute inhalation toxicity : LC50 rat: 132 mg/l

Exposure time: 3 h

LC50 rat: 50.1 mg/l

Acute dermal toxicity : LD50 guinea pig: > 7,426 mg/kg

SAFETY DATA SHEET



A00725 ICM WHT LTHM GRS ICA725 16net11

Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

LD50 rabbit: > 7,426 mg/kg

propane:

Acute inhalation toxicity : LC50 mouse: 1,237 mg/l

Exposure time: 2 h

LC50 rat: 658 mg/l Exposure time: 4 h

LC50 rat: 1,355 mg/l

butane:

Acute inhalation toxicity : LC50 mouse: 1,237 mg/l

Exposure time: 2 h

LC50 rat: 1,355 mg/l

Skin corrosion/irritation

Product:

Remarks: Irritating to skin.

Serious eye damage/eye irritation

Product:

Remarks: Severe eye irritation

Respiratory or skin sensitisation

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

no data available

Reproductive toxicity

no data available

Distillates (petroleum), hydrotreated light:

acetone:

Heptane, branched, cyclic and linear:

propane: butane:

STOT - single exposure

no data available

STOT - repeated exposure

no data available

Aspiration toxicity



Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

no data available

Further information

Product:

Remarks: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting., Concentrations substantially above the TLV value may cause narcotic effects., Solvents may degrease the skin.

Components:

Distillates (petroleum), hydrotreated light:

Remarks: no data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

no data available

Persistence and degradability

no data available

Bioaccumulative potential

Product:

butane:

Partition coefficient: n-

octanol/water Components:

Partition coefficient: n-

octanol/water

: Pow: 2.89

: Remarks: no data available

Mobility in soil

no data available

Other adverse effects

no data available

Product:

Regulation 40 CFR Protection of Environment; Part 82 Protection of

Stratospheric Ozone - CAA Section 602 Class I

Substances

Remarks This product neither contains, nor was manufactured

with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A

+ B).

Additional ecological

information

: An environmental hazard cannot be excluded in the event of unprofessional handling or disposal., Toxic to aquatic life., Harmful to aquatic life with long lasting

effects.

Components:

SAFETY DATA SHEET



A00725 ICM WHT LTHM GRS ICA725 16net11

Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

Distillates (petroleum), hydrotreated light:

Additional ecological

information

: no data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : Do not dispose of waste into sewer.

Do not contaminate ponds, waterways or ditches with

chemical or used container.

Dispose of in accordance with local regulations.

The product should not be allowed to enter drains, water

courses or the soil.

Contaminated packaging : Empty remaining contents.

Dispose of as unused product. Do not re-use empty containers.

Do not burn, or use a cutting torch on, the empty drum.

SECTION 14. TRANSPORT INFORMATION

Transportation Regulation: 49 CFR (USA): ORM-D, CONSUMER COMMODITY

Transportation Regulation: IMDG (Vessel): UN1950, AEROSOLS, 2.1, - Limited quantity

Transportation Regulation: IATA (Cargo Air):

UN1950, Aerosols, flammable, 2.1, - Limited quantity

Transportation Regulation: IATA (Passenger Air): UN1950, Aerosols, flammable, 2.1, - Limited quantity

Transportation Regulation: TDG (Canada): UN1950, AEROSOLS, 2.1, - Limited quantity

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know Act

CERCLA Reportable Quantity

Components	CAS-No.	Component RQ	Calculated product RQ
		(lbs)	(lbs)
acetone	67-64-1	5000	*



Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

*: Calculated RQ exceeds reasonably attainable upper limit.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Fire Hazard

Sudden Release of Pressure Hazard

Acute Health Hazard

SARA 302 : SARA 302: No chemicals in this material are subject to the

reporting requirements of SARA Title III, Section 302.

SARA 313 : SARA 313: This material does not contain any chemical

components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA

Title III, Section 313.

California Prop 65 This product does not contain any chemicals known to State of

California to cause cancer, birth defects, or any other

reproductive harm.

The components of this product are reported in the following inventories:

TSCA On TSCA Inventory

DSL This product contains one or several components that are not on the

Canadian DSL nor NDSL.

AICS
Not in compliance with the inventory
NZIoC
Not in compliance with the inventory
PICCS
Not in compliance with the inventory
IECSC
Not in compliance with the inventory

Inventory Acronym and Validity Area Legend:

AICS (Australia), DSL (Canada), IECSC (China), REACH (European Union), ENCS (Japan), ISHL (Japan), KECI (Korea), NZIOC (New Zealand), PICCS (Philippines), TSCA (USA)


SECTION 16. OTHER INFORMATION



Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016

Further information

NFPA:



Special hazard.

HMIS III:

HEALTH	3
FLAMMABILITY	4
PHYSICAL HAZARD	2

0 = not significant, 1 = Slight,

2 = Moderate, 3 = High 4 = Extreme, * = Chronic

OSHA GHS Label Information:

Hazard pictograms







Signal word Hazard statements Danger:

Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause drow siness or

Precautionary statements

Prevention: Keep aw ay fromheat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray. Wash skin thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear eye protection/face protection. Wear protective gloves.

Response: IF ON SKIN: Wash with plenty of soap and water. IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If skin irritation occurs: Get medical advice/ attention. If eye irritation persists: Get medical advice/ attention. Take off contaminated clothing and w ash before

Storage: Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/ 122 °F. Disposal: Dispose of contents/container in accordance with local regulation.

We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. Users should make their own investigations to determine the suitability and applicability of the information for their particular purposes. This SDS has been prepared by the Compliance Services organization supporting this manufacturer, supplier or distributor.

Zep Inc. markets products under well recognized and established brand names such as Zep®, Zep Commercial®, Zep Professional®, Enforcer®, National Chemical™, Selig™, Misty®, Next Dimension™, Petro®, i-Chem®, TimeMist®, TimeWick™, MicrobeMax®, Country Vet®, Konk®, Original Bike Spirits®, Blue Coral®, Black Magic®, Rain-X®, Niagara National™, FC Forward Chemicals®,Rexodan®, Mykal™, and a number of private labeled brands.

SAFETY DATA SHEET



A00725 ICM WHT LTHM GRS ICA725 16net11

Version 1.0 Revision Date 03/11/2015 Print Date 03/02/2016



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

SECTION 1. IDENTIFICATION

Product name : GOJO® NATURAL* ORANGE™ Pumice Hand Cleaner

Manufacturer or supplier's details

Company name of supplier : GOJO Industries, Inc.

Address : One GOJO Plaza, Suite 500

Akron OH 44311

Telephone : 1 (330) 255-6000

Emergency telephone : 1-800-424-9300 CHEMTREC

Recommended use of the chemical and restrictions on use

Recommended use : Skin-care

Restrictions on use : This is a personal care or cosmetic product that is safe for

consumers and other users under normal and reasonably foreseeable use. Cosmetics and consumer products, specifically defined by regulations around the world, are exempt from the requirement of an SDS for the consumer. While this material is not considered hazardous, this SDS contains valuable information critical to the safe handling and proper use of the product for industrial workplace conditions as well as unusual and unintended exposures such as large spills. This SDS should be retained and available for employees and other users of this product. For specific intended-use guidance, please refer to the information

provided on the package or instruction sheet.

SECTION 2. HAZARDS IDENTIFICATION

GHS Classification

Eye irritation : Category 2A

GHS Label element

Hazard pictograms



Signal Word : Warning

Hazard Statements : H319 Causes serious eye irritation.

Precautionary Statements : **Prevention:**



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

P264 Wash skin thoroughly after handling. P280 Wear eye protection/ face protection.

Response:

P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy

to do. Continue rinsing.

P337 + P313 If eye irritation persists: Get medical advice/

attention.

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous ingredients

Chemical Name	CAS-No.	Concentration (%)
1-Methyl 4-(1-Methylethenyl) Cyclohexene	5989-27-5	>= 5 - < 10
Alcohols, C12-15, ethoxylated propoxylated	68551-13-3	>= 1 - < 5

SECTION 4. FIRST AID MEASURES

General advice : In the case of accident or if you feel unwell, seek medical

advice immediately.

When symptoms persist or in all cases of doubt seek medical

advice.

If inhaled : If inhaled, remove to fresh air.

Get medical attention if symptoms occur.

In case of skin contact : Wash with water and soap as a precaution.

Get medical attention if symptoms occur.

In case of eye contact : In case of contact, immediately flush eyes with plenty of water

for at least 15 minutes.

If easy to do, remove contact lens, if worn.

Get medical attention.

If swallowed, DO NOT induce vomiting.

Get medical attention if symptoms occur. Rinse mouth thoroughly with water.

Most important symptoms and effects, both acute and

delayed

: Causes serious eye irritation.

Protection of first-aiders : First Aid responders should pay attention to self-protection,

and use the recommended personal protective equipment

when the potential for exposure exists.



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

Notes to physician : Treat symptomatically and supportively.

SECTION 5. FIRE-FIGHTING MEASURES

Suitable extinguishing media : Water spray

Alcohol-resistant foam

Dry chemical

Carbon dioxide (CO2)

Unsuitable extinguishing

media

None known.

Specific hazards during fire

fighting

: Exposure to combustion products may be a hazard to health.

Hazardous combustion prod-

ucts

: Carbon oxides

Specific extinguishing

methods

: Use extinguishing measures that are appropriate to local

circumstances and the surrounding environment. Use water spray to cool unopened containers.

Remove undamaged containers from fire area if it is safe to do

SO.

Evacuate area.

Special protective equipment

for fire-fighters

: In the event of fire, wear self-contained breathing apparatus.

Use personal protective equipment.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.

Follow safe handling advice and personal protective

equipment recommendations.

Environmental precautions : Discharge into the environment must be avoided.

Prevent further leakage or spillage if safe to do so.

Prevent spreading over a wide area (e.g. by containment or oil

barriers).

Retain and dispose of contaminated wash water.

Local authorities should be advised if significant spillages

cannot be contained.

Methods and materials for containment and cleaning up

: Soak up with inert absorbent material.

For large spills, provide diking or other appropriate

containment to keep material from spreading. If diked material can be pumped, store recovered material in appropriate

container.

Clean up remaining materials from spill with suitable

absorbent.

Local or national regulations may apply to releases and disposal of this material, as well as those materials and items



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

employed in the cleanup of releases. You will need to

determine which regulations are applicable.

Sections 13 and 15 of this SDS provide information regarding

certain local or national requirements.

SECTION 7. HANDLING AND STORAGE

Technical measures : See Engineering measures under EXPOSURE

CONTROLS/PERSONAL PROTECTION section.

Local/Total ventilation : Use only with adequate ventilation.

Advice on safe handling : Avoid inhalation of vapor or mist.

Do not swallow. Do not get in eyes.

Avoid prolonged or repeated contact with skin.

Handle in accordance with good industrial hygiene and safety

practice.

Take care to prevent spills, waste and minimize release to the

environment.

Conditions for safe storage : Keep in properly labeled containers.

Store in accordance with the particular national regulations.

Materials to avoid : Do not store with the following product types:

Strong oxidizing agents

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Ingredients with workplace control parameters

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

Ingredients	CAS-No.
1-Methyl 4-(1-Methylethenyl)	5989-27-5
Cyclohexene	
Alcohols, C12-15, ethoxylated	68551-13-3
propoxylated	

Engineering measures : Ensure adequate ventilation, especially in confined areas.

Minimize workplace exposure concentrations.

Dust formation may be relevant in the processing of this product. In addition to substance-specific OELs, general limitations of concentrations of particulates in the air at workplaces have to be considered in workplace risk assessment. Relevant limits include: OSHA PEL for Particulates Not Otherwise Regulated of 15 mg/m3 - total dust, 5 mg/m3 - respirable fraction; and ACGIH TWA for Particles (insoluble or poorly soluble) Not Otherwise Specified of 3 mg/m3 - respirable particles, 10 mg/m3 -

inhalable particles.



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

Personal protective equipment

Respiratory protection : General and local exhaust ventilation is recommended to

maintain vapor exposures below recommended limits. Where concentrations are above recommended limits or are unknown, appropriate respiratory protection should be worn. Follow OSHA respirator regulations (29 CFR 1910.134) and use NIOSH/MSHA approved respirators. Protection provided

by air purifying respirators against exposure to any hazardous chemical is limited. Use a positive pressure air

supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other

circumstance where air purifying respirators may not provide

adequate protection.

Hand protection

Material : Impervious gloves

Remarks : Choose gloves to protect hands against chemicals depending

on the concentration specific to place of work. Breakthrough time is not determined for the product. Change gloves often! For special applications, we recommend clarifying the resistance to chemicals of the aforementioned protective gloves with the glove manufacturer. Wash hands before

breaks and at the end of workday.

Eye protection : Wear the following personal protective equipment:

Safety goggles

Skin and body protection : Select appropriate protective clothing based on chemical

resistance data and an assessment of the local exposure

potential.

Skin contact must be avoided by using impervious protective

clothing (gloves, aprons, boots, etc).

Hygiene measures : Ensure that eye flushing systems and safety showers are

located close to the working place.
When using do not eat, drink or smoke.
Wash contaminated clothing before re-use.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance : liquid

Color : gray, opaque

Odor : citrus

Odor Threshold : No data available



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

pH : 5.0 - 8.0

Melting point/freezing point : No data available

Initial boiling point and boiling

range

: 95 °C

Flash point : > 100 °C

Evaporation rate : No data available

Flammability (solid, gas) : Not applicable

Upper explosion limit : No data available

Lower explosion limit : No data available

Vapor pressure : No data available

Relative vapor density : No data available

Density : 1.0390 g/cm3

Solubility(ies)

Water solubility : soluble

Partition coefficient: n-

octanol/water

: Not applicable

Autoignition temperature : No data available

Decomposition temperature : The substance or mixture is not classified self-reactive.

Viscosity

Viscosity, kinematic : 10,000 - 50,000 mm2/s (20 °C)

Explosive properties : Not explosive

Oxidizing properties : The substance or mixture is not classified as oxidizing.

SECTION 10. STABILITY AND REACTIVITY

Reactivity : Not classified as a reactivity hazard.

Chemical stability : Stable under normal conditions.

Possibility of hazardous reac-

tions

: Can react with strong oxidizing agents.

Conditions to avoid : None known.



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

Incompatible materials : Oxidizing agents

Hazardous decomposition

products

: No hazardous decomposition products are known.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Inhalation Skin contact Ingestion Eye contact

Acute toxicity

Not classified based on available information.

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

Acute oral toxicity : LD50 (Rat): > 2,000 mg/kg

Assessment: The substance or mixture has no acute oral

toxicity

Remarks: Based on data from similar materials

Alcohols, C12-15, ethoxylated propoxylated:

Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg

Remarks: Based on data from similar materials

Acute inhalation toxicity : LC50 (Rat): > 1.6 mg/l

Exposure time: 4 h

Test atmosphere: dust/mist

Assessment: The substance or mixture has no acute

inhalation toxicity

Remarks: Based on data from similar materials

Acute dermal toxicity : LD50 (Rat): > 2,000 mg/kg

Assessment: The substance or mixture has no acute dermal

toxicity

Remarks: Based on data from similar materials

Skin corrosion/irritation

Not classified based on available information.

Product:

Result: No skin irritation

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

Species: Rabbit Result: Skin irritation

Alcohols, C12-15, ethoxylated propoxylated:

Species: Rabbit

Method: OECD Test Guideline 404



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

Result: No skin irritation

Remarks: Based on data from similar materials

Serious eye damage/eye irritation

Causes serious eye irritation.

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

Species: Rabbit

Result: No eye irritation

Alcohols, C12-15, ethoxylated propoxylated:

Result: Irreversible effects on the eye

Remarks: Based on data from similar materials

Respiratory or skin sensitization

Skin sensitization: Not classified based on available information.

Respiratory sensitization: Not classified based on available information.

<u>Product:</u>

Assessment: Does not cause skin sensitization.

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

Test Type: Local lymph node assay (LLNA)

Routes of exposure: Skin contact

Species: Mouse Result: positive

Assessment: Probability or evidence of skin sensitization in humans

Alcohols, C12-15, ethoxylated propoxylated:

Test Type: Maximization Test (GPMT) Routes of exposure: Skin contact

Species: Guinea pig

Method: OECD Test Guideline 406

Result: negative

Remarks: Based on data from similar materials

Germ cell mutagenicity

Not classified based on available information.

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

Genotoxicity in vitro : Test Type: In vitro mammalian cell gene mutation test

Result: negative

Genotoxicity in vivo : Test Type: Transgenic rodent somatic cell gene mutation as-

say

Species: Rat

Application Route: Ingestion



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

Result: negative

Alcohols, C12-15, ethoxylated propoxylated:

Genotoxicity in vitro : Test Type: Bacterial reverse mutation assay (AMES)

Result: negative

Remarks: Based on data from similar materials

Genotoxicity in vivo : Test Type: Mutagenicity (in vivo mammalian bone-marrow

cytogenetic test, chromosomal analysis)

Species: Rat

Application Route: Ingestion

Result: negative

Remarks: Based on data from similar materials

Carcinogenicity

Not classified based on available information.

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

Species: Mouse

Application Route: Ingestion Exposure time: 103 weeks

Result: negative

IARC No ingredient of this product present at levels greater than or

equal to 0.1% is identified as probable, possible or confirmed

human carcinogen by IARC.

OSHA No ingredient of this product present at levels greater than or

equal to 0.1% is identified as a carcinogen or potential carcino-

gen by OSHA.

NTP No ingredient of this product present at levels greater than or

equal to 0.1% is identified as a known or anticipated carcinogen

by NTP.

Reproductive toxicity

Not classified based on available information.

Ingredients:

Alcohols, C12-15, ethoxylated propoxylated:

Effects on fertility : Test Type: Two-generation reproduction toxicity study

Species: Rat

Application Route: Skin contact

Result: negative

Remarks: Based on data from similar materials

Effects on fetal development : Test Type: Two-generation reproduction toxicity study

Species: Rat

Application Route: Skin contact

Result: negative

Remarks: Based on data from similar materials



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

STOT-single exposure

Not classified based on available information.

STOT-repeated exposure

Not classified based on available information.

Repeated dose toxicity

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

Species: Rat

NOAEL: 600 mg/kg

Application Route: Ingestion

Exposure time: 13 w

Alcohols, C12-15, ethoxylated propoxylated:

Species: Rat NOAEL: 500 mg/kg

Application Route: Ingestion

Exposure time: 90 d

Remarks: Based on data from similar materials

Aspiration toxicity

Not classified based on available information.

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

The substance or mixture is known to cause human aspiration toxicity hazards or has to be regarded as if it causes a human aspiration toxicity hazard.

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

Toxicity to fish : LC50 (Pimephales promelas (fathead minnow)): 0.72 mg/l

Exposure time: 96 h

Toxicity to daphnia and other

aquatic invertebrates

: EC50 (Daphnia magna (Water flea)): 0.36 mg/l

Exposure time: 48 h

Toxicity to algae : ErC50 (Desmodesmus subspicatus (green algae)): 150 mg/l

Exposure time: 72 h

Test substance: Water Accommodated Fraction Remarks: Based on data from similar materials

M-Factor (Acute aquatic tox-

icity)

: 1

Alcohols, C12-15, ethoxylated propoxylated:

Toxicity to fish : LC50 (Scophthalmus maximus (turbot)): 3.1 mg/l



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

Exposure time: 96 h

Remarks: Based on data from similar materials

Toxicity to daphnia and other

aquatic invertebrates

EC50 (Daphnia magna (Water flea)): 0.14 mg/l

Exposure time: 48 h

Remarks: Based on data from similar materials

Toxicity to algae : EC50 (Pseudokirchneriella subcapitata (green algae)): 0.75

ma/l

Exposure time: 72 h

Remarks: Based on data from similar materials

M-Factor (Acute aquatic tox-

icity)

: 1

Toxicity to bacteria : EC50 (Pseudomonas putida): > 10,000 mg/l

Exposure time: 16.9 h

Remarks: Based on data from similar materials

Persistence and degradability

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

Biodegradability : Result: Readily biodegradable.

Biodegradation: 80 % Exposure time: 28 d

Remarks: Based on data from similar materials

Alcohols, C12-15, ethoxylated propoxylated:

Biodegradability : Result: Readily biodegradable.

Biodegradation: 80 - 88 %

Exposure time: 28 d

Remarks: Based on data from similar materials

Bioaccumulative potential

Ingredients:

1-Methyl 4-(1-Methylethenyl) Cyclohexene:

Partition coefficient: n-

octanol/water

: log Pow: 4.38

Mobility in soil

No data available

Other adverse effects

No data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : Dispose of in accordance with local regulations.



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

Dispose of as unused product. Contaminated packaging

Empty containers should be taken to an approved waste

handling site for recycling or disposal.

SECTION 14. TRANSPORT INFORMATION

International Regulation

UNRTDG

UN number : UN 3082

Proper shipping name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID,

(1-Methyl 4-(1-Methylethenyl) Cyclohexene)

Class : 9 Packing group Ш 9 Labels

IATA-DGR

UN/ID No. : UN 3082

Proper shipping name Environmentally hazardous substance, liquid, n.o.s.

(1-Methyl 4-(1-Methylethenyl) Cyclohexene)

: 9 Class Packing group Ш

: Miscellaneous Labels 964

Packing instruction (cargo

aircraft)

Packing instruction : 964

(passenger aircraft)

IMDG-Code

UN number : UN 3082

Proper shipping name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID,

N.O.S.

(1-Methyl 4-(1-Methylethenyl) Cyclohexene)

Class 9 Packing group Ш Labels 9 EmS Code F-A, S-F Marine pollutant : yes

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

Domestic regulation

49 CFR

UN/ID/NA number : UN 3082

: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, Proper shipping name

N.O.S.

(1-Methyl 4-(1-Methylethenyl) Cyclohexene)

Class



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

Packing group : III

Labels : CLASS 9 ERG Code : 171

Marine pollutant : yes (1-Methyl 4-(1-Methylethenyl) Cyclohexene)

Remarks : Shipment by ground under DOT is non-regulated; however it

may be shipped per the applicable hazard classification to facilitate multi-modal transport involving ICAO (IATA) or IMO.

SECTION 15. REGULATORY INFORMATION

EPCRA - Emergency Planning and Community Right-to-Know

CERCLA Reportable Quantity

This material does not contain any components with a CERCLA RQ.

SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

SARA 311/312 Hazards : Acute Health Hazard

SARA 302 : No chemicals in this material are subject to the reporting

requirements of SARA Title III, Section 302.

SARA 313 : This material does not contain any chemical components with

known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

US State Regulations

Pennsylvania Right To Know

Water	7732-18-5	70 - 90 %
Pumice	1332-09-8	5 - 10 %
1-Methyl 4-(1-Methylethenyl) Cyclohexene	5989-27-5	5 - 10 %

New Jersey Right To Know

Water	7732-18-5	70 - 90 %
Pumice	1332-09-8	5 - 10 %
1-Methyl 4-(1-Methylethenyl) Cyclohexene	5989-27-5	5 - 10 %
Alcohols, C12-15, ethoxylated propoxylated	68551-13-3	1 - 5 %

California Prop 65 This product does not contain any chemicals known to the

State of California to cause cancer, birth, or any other

reproductive defects.

The ingredients of this product are reported in the following inventories:

REACH : All ingredients (pre-)registered or exempt.

TSCA : All chemical substances in this product are either listed on the

TSCA Inventory or are in compliance with a TSCA Inventory



Version Revision Date: MSDS Number: Date of last issue: -

1.0 03/02/2015 68057-00001 Date of first issue: 03/02/2015

exemption.

DSL : All chemical substances in this product comply with the CEPA

1999 and NSNR and are on or exempt from listing on the

Canadian Domestic Substances List (DSL).

AICS : All ingredients listed or exempt.


Inventories

AICS (Australia), DSL (Canada), IECSC (China), REACH (European Union), ENCS (Japan), ISHL (Japan), KECI (Korea), NZIoC (New Zealand), PICCS (Philippines), TCSI (Taiwan), TSCA (USA)

SECTION 16. OTHER INFORMATION

Further information

NFPA:



HMIS III:

HEALTH	2
FLAMMABILITY	1
PHYSICAL HAZARD	0

0 = not significant, 1 = Slight,

2 = Moderate, 3 = High

4 = Extreme, * = Chronic

Sources of key data used to compile the Material Safety

Data Sheet

: Internal technical data, data from raw material SDSs, OECD eChem Portal search results and European Chemicals Agen-

cy, http://echa.europa.eu/

Revision Date : 03/02/2015

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and shall not be considered a warranty or quality specification of any type. The information provided relates only to the specific material identified at the top of this SDS and may not be valid when the SDS material is used in combination with any other materials or in any process, unless specified in the text. Material users should review the information and recommendations in the specific context of their intended manner of handling, use, processing and storage, including an assessment of the appropriateness of the SDS material in the user's end product, if applicable.

US / Z8

MATERIAL SAFETY DATA SHEET

Specialty Adhesives, Inc. 3777 Air Park Memphis, TN 38118 Date: 2014

Prepared by: Tim Myrick/ V. Lauria Telephone number: (901) 794-8556

Emergency Medical Telephone Number: (901)794-8556

PRODUCT IDENTIFICATION

Specialty Adhesives Name: 3006

Product Class: SYNTHETIC RESIN based product in water

DOT Proper Shipping name: none DOT regulated

WARNING STATEMENTS: PRECAUTIONARY MEASURES No specific warnings under normal use. Avoid temperature extremes during storage

EMERGENCY AND FIRST AID PROCEDURES

First Aid:

If in eye:

Flush immediately with water for 15 minutes.

Consult a physician if irritation persists.

If on skin:

No hazard under normal use.

If vapors inhaled: In case of fire: No hazard under normal use.

Product non-flammable in liquid state. Use

water spray, foam, dry chemical or carbon

dioxide on dried product.

Spill or Leak:

Contain and remove with inert absorbent

Keep spill out of sewers.

HAZARDOUS INGREDIENTS

Level

ACGIH TLV

in product

OSHA PEL

(1994)

Material Name / CAS # None hazardous.

This MSDS is prepared to comply with the OSHA Hazard Communication Standard (29 CFR 1919.1200). Unlisted ingredients are not "Hazardous" per this OSHA Standard and are considered to be trade secrets of Specialty Adhesives, INC.

NE -not established NA -not applicable

OCCUPATIONAL CONTROL PROCEDURES

Eye Protection: Wear sa

Wear safety glasses to reduce the potential for eye contact; chemical safety goggles are appropriate if splashing is likely. Have eye washes available where eye contact can occur.

Skin Protection:

No hazard under normal use.

Respiratory

not normally required.

Protection:

Ventilation:

Standard industrial ventilation.

FIRE PROTECTION

Flash Point/Method:

Non-flammable

Appropriate Extinguishers:

Non-flammable in liquid state; use water spray, foam, dry chemical or carbon dioxide on dried

product.

Special Fire Fighting Persons exposed to products of combustion should wear self-contained breathing apparatus

Procedures:

and full protective equipment.

Unusual Fire and Explosion Hazards: There is the possibility of pressure buildup in closed containers when heated. Water spray may

be used to cool the containers.

REACTIVITY DATA

Stability:

Stable

Incompatibility:

not established

Hazardous Decomposed

Incomplete combustion can yield low

Products:

molecular wt. hydrocarbons, carbon monoxide

Hazardous Polymerization:

will not occur.

EFFECTS OF OVEREXPOSURE

Eyes:

Direct eye contact with the product may cause

irritation

Skin:

Prolonged or repeated contact with liquid

product may cause irritations.

Inhalation:

No hazard under normal use. No hazard under normal use.

Chronic:

Existing Health Conditions Affected by exposure:

No known effects on other illnesses.

NA - not applicable NE- not established

page 3

PHYSICAL DATA

Physical State: White Liquid

Weight per Gallon: 9.1
PH: 4.0- 6.0
Boiling Range: > 200 F
Soluble in Water: Miscible

SPILL, LEAK & DISPOSAL INFORMATION

Spill or Leak Dike if necessary, contain spill with inert absorbent and transfer to containers for

disposal. Keep spilled product out of sewers, watersheds or water systems.

To the best of our knowledge, this product

Waste Disposal: To the best of our knowledge, this product Does not meet the definition of hazardous

waste under EPA Regulations 40 CFR 261. It does not contain any added raw materials with known levels of TCLP constituents as identified in section 261.24 of the above mentioned regulation. State or local regulations may apply if they are different from federal regulations. Check with local officials before disposal. Solidify and dispose of in an approved

landfill.

STORAGE

Protect from freezing - product stability may be affected.

ADDITIONAL INFORMATION:

In storage, monomer vapors will migrate from the emulsion and establish an equilibrium between the headspace in the storage container and the liquid emulsion. Levels in excess of acceptable exposures can accumulate in nonvented headspaces above the emulsion. All procedures appropriate for a confined space entry should be completed prior to performing any work in a bulk storage tank.

REGULATORY INFORMATION

TSCA

All components of this product are registered under the regulations of the Toxic Substances Control Act.

SARA TITLE III

Section 313:

This product contains the following toxic chemical(s) subject to the

reporting requirements of section 313 of

Title III of the Superfund Amendments and Reauthorization

Act of 1986 (SARA) and 40 CFR part 372.

None Contained

This information must be included in all MSDS that are copied and distributed for this material.

NA- not applicable NE- not established



MATERIAL SAFETY DATA SHEET

Product and Company Identification

Product number

0766 005

Material name

Jet Force Wasp & Hornet Killer

Revision date

07-29-2013

Company information

Claire Manufacturing Co. 1005 S. Westgate Drive Addison, IL 60101 United States

Company phone

General Assistance 1-630-543-7600

Emergency telephone US

1-866-836-8855

Emergency telephone outside

1-952-852-4646

US

Version#

02

Supersedes date

07-29-2013

2. Hazards Identification

Emergency overview

DANGER

CONTENTS UNDER PRESSURE.

Aerosol. Pressurized container may explode when exposed to heat or flame. May cause flash fire

or explosion.

Will be easily ignited by heat, spark or flames. Harmful in contact with eyes. Irritating to skin.

This product is considered hazardous under 29 CFR 1910.1200 (Hazard Communication).

Irritating to respiratory system. Prolonged exposure may cause chronic effects.

OSHA regulatory status

Potential health effects

Routes of exposure

Inhalation. Ingestion. Skin contact. Eye contact.

Eyes

Eye contact may result in corneal injury. Contact with eyes may cause irritation. Moderately irritating to the eyes.

Skin

Irritating to skin. Frequent or prolonged contact may defat and dry the skin, leading to discomfort

and dermatitis. Harmful if absorbed through the skin.

Inhalation

Intentional misuse by concentrating and inhaling the product can be harmful or fatal. Irritating to

respiratory system. Prolonged inhalation may be harmful.

Ingestion

Exposure by ingestion of an aerosol is unlikely. Components of the product may be absorbed into

the body by ingestion. May cause delayed lung damage.

Target organs

Blood, Cardiac, Central nervous system, Lungs, Respiratory system.

Chronic effects

Unconsciousness. Shortness of breath. Conjunctiva. Cyanosis (blue tissue condition, nails, lips, and/or skin). May cause central nervous system disorder (e.g., narcosis involving a loss of coordination, weakness, fatigue, mental confusion and blurred vision) and/or damage. Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May cause

delayed lung injury.

Signs and symptoms

Unconsciousness. Discomfort in the chest. Shortness of breath. Corneal damage. Narcosis. Cyanosis (blue tissue condition, nails, lips, and/or skin). Decrease in motor functions. Behavioral changes. Coughing. Conjunctivitis. Irritating to mouth, throat, and stomach. Skin irritation. Defatting of the skin. Rash.

3. Composition / Information on Ingredients

CAS#	Percent
64742-47-8	80 - 90
124-38-9	2.5 - 10
67-63-0	2.5 - 10
	64742-47-8 124-38-9

Product name: Jet Force Wasp & Hornet Killer

Product #: 06209474F Version #: 02 Revision date: 07-29-2013 Issue date: 07-29-2013

Non-hazardous components	CAS#	Percent
d-Phenothrin	26002-80-2	0.1 - 1
Tetramethrin	7696-12-0	0.1 - 1
Other components below reportable levels		1 - 2.5

4. First Aid Measures

First aid procedures

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if

present and easy to do. Continue rinsing. Get medical attention immediately.

Skin contact Get medical attention if irritation develops and persists. Remove and isolate contaminated clothing

and shoes. Wash off immediately with plenty of water for at least 15 minutes.

Inhalation If inhalation of gas/fume/vapor/dust/mist from the material is excessive (air concentration is greater

than the TLV or health effects are noticed), immediately remove the affected person(s) to fresh air. Oxygen or artificial respiration if needed. Do not use mouth-to-mouth method if victim inhaled the substance. Induce artificial respiration with the aid of a pocket mask equipped with a one-way

valve or other proper respiratory medical device, Get medical attention immediately.

Ingestion In the unlikely event of swallowing contact a physician or poison control center. Rinse mouth thoroughly. Do not induce vomiting without advice from poison control center. If vomiting occurs,

keep head low so that stomach content doesn't get into the lungs. If material is ingested, immediately contact a poison control center. If vomiting occurs naturally, have victim lean forward

to reduce risk of aspiration. Do not use mouth-to-mouth method if victim ingested the substance. Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other

proper respiratory medical device.

Notes to physician

Symptoms may be delayed.

General advice Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. If you feel unwell, seek medical advice (show the label where possible).

5. Fire Fighting Measures

Flammable properties Flammable by OSHA criteria. Heat may cause the containers to explode. Vapors may travel

considerable distance to a source of ignition and flash back. Runoff to sewer may cause fire or

explosion hazard.

Extinguishing media

Suitable extinguishing

media

Powder. Alcohol resistant foam. Dry chemicals. Carbon dioxide (CO2).

Unsuitable extinguishing

media

Do not use water jet as an extinguisher, as this will spread the fire.

Protection of firefighters

Specific hazards arising

from the chemical

Protective equipment and precautions for firefighters Fire may produce irritating, corrosive and/or toxic gases.

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. Structural firefighters protective

clothing will only provide limited protection.

Fire fighting

equipment/instructions

In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. Cool containers exposed to heat with water spray and remove container, if no risk is involved. Containers should be cooled with water to prevent vapor pressure build up. For

massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.

Specific methods Use standard firefighting procedures and consider the hazards of other involved materials. Move

container from fire area if it can be done without risk. In the event of fire and/or explosion do not breathe fumes. Self-contained breathing apparatus and full protective clothing must be worn in

case of fire.

6. Accidental Release Measures

Personal precautions Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of

low areas. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. For personal protection, see

section 8 of the MSDS.

Environmental precautions Do not contaminate water.

Methods for containment

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Use water spray to reduce vapors or divert vapor cloud drift. Prevent entry into waterways, sewer, basements or confined areas.

Methods for cleaning up

Should not be released into the environment. Stop the flow of material, if this is without risk. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Isolate area until gas has dispersed. Following product recovery, flush area with water. Scrub the area with detergent and water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the MSDS. After removal flush contaminated area thoroughly with water.

7. Handling and Storage

Handling

Will ignite if exposed to intensive heat or open air. Vapors may form explosive mixtures with air. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe dust/fume/gas/mist/vapors/spray. Do not get this material in contact with eyes. Avoid contact with skin. Avoid prolonged or repeated contact with skin. Avoid prolonged exposure. Use only in area provided with appropriate exhaust ventilation.

Storage

Contents under pressure. The pressure in sealed containers can increase under the influence of heat. Do not expose to heat or store at temperatures above 120°F/49°C as can may burst. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Store in a well-ventilated place. Keep away from food, drink and animal feedingstuffs. Keep in an area equipped with sprinklers. Use care in handling/storage. Store away from incompatible materials (see Section 10 of the MSDS). Level 3 Aerosol.

8. Exposure Controls / Personal Protection

Occupational exposure limits

ACGIH Biological Exposure India Components	ces Type	Value	
Isopropyl Alcohol (CAS 67-63-0)	BEI	40 mg/l	
US. ACGIH Threshold Limit Value	es		
Components	Туре	Value	
Carbon Dioxide (CAS 124-38-9)	STEL	30000 ppm	
	TWA	5000 ppm	
Isopropyl Alcohol (CAS 67-63-0)	STEL	400 ppm	
	TWA	200 ppm	
US. OSHA Table Z-1 Limits for Air	Contaminants (29 CFR 1910.		
Components	Туре	Value	
Carbon Dioxide (CAS 124-38-9)	PEL	9000 mg/m3	
		5000 ppm	
sopropyl Alcohol (CAS 67-63-0)	PEL	980 mg/m3	
		400 ppm	

Engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Personal protective equipment

Eye / face protection Skin protection

Do not get in eyes. Face-shield. Wear safety glasses; chemical goggles (if splashing is possible). Avoid contact with the skin. Wear appropriate chemical resistant clothing. Chemical resistant gloves. The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an

air-supplied respirator.

General hygiene considerations

When using do not smoke. Do not get in eyes. Keep away from food and drink. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove

contaminants.

9. Physical & Chemical Properties

Appearance

Compressed liquefied gas.

Auto-ignition temperature

450.44 °F (232.47 °C) estimated

Boiling point

438,64 °F (225.91 °C) estimated

Color

Colorless.

Flammability limits in air,

12 % estimated

upper, % by volume Flammability limits in air,

0.7 % estimated

lower, % by volume Flash point

212.16 °F (100.09 °C) estimated

Form Odor Aerosol.

Odor threshold

Not available.

Solvent.

pH

Not applicable estimated

Physical state

Gas.

Solubility (water) Specific gravity Not available.

0.829 estimated

Vapor pressure

90 - 110 psig @70F estimated

Other data

Heat of combustion

38.77 kJ/g estimated

10. Chemical Stability & Reactivity Information

Chemical stability

Risk of ignition.

Conditions to avoid

Exposure to air. Heat, flames and sparks. Avoid temperatures exceeding the flash point.

Hazardous decomposition

products

No hazardous decomposition products are known.

Possibility of hazardous

reactions

Hazardous polymerization does not occur.

11. Toxicological Information

Toxicological data

Product	Species	Test Results
Jet Force Wasp & Hornet H	Killer (CAS Mixture)	
Acute		
Dermal		
LD50	Rat	2237 mg/kg
Inhalation		
LC50	Rat	1371.2346 mg/l, 3 Hours, estimated
		6 mg/l/4h
Oral		
LD50	Dog	56453.8906 mg/kg, estimated
	Mouse	35447.2422 mg/kg, estimated
	Rabbit	59.196 g/kg, estimated
	Rat	
		53,8251 g/kg, estimated

Product name: Jet Force Wasp & Hornet Killer

MSD3 US

XPS Print Error

Job name:

(none)

Document name: Page number:

5

Error:

XPS format error (19,4,330)

SAFETY DATA SHEET

1. Identification

Product number 1000000940

JET FORCE WASP & HORNET KILLER Product identifier

Company information Claire Manufacturing Co.

1005 S. Westgate Drive

Addison, IL 60101 United States

General Assistance 1-630-543-7600 Company phone

1-866-836-8855 **Emergency telephone US Emergency telephone outside** 1-952-852-4646

US

01 Version #

Recommended use **PESTICIDE Recommended restrictions** None known.

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1 **Health hazards** Aspiration hazard Category 1 **Environmental hazards** Hazardous to the aquatic environment, acute Category 2

hazard

Hazardous to the aquatic environment,

Category 2

long-term hazard

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Extremely flammable aerosol. May be fatal if swallowed and enters airways.

Precautionary statement

Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open

flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Avoid

release to the environment.

If swallowed: Immediately call a poison center/doctor. Do NOT induce vomiting. Collect spillage. Response Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. **Storage** Dispose of contents/container in accordance with local/regional/national/international regulations. **Disposal**

Hazard(s) not otherwise

classified (HNOC)

None known.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Distillates (Petroleum), Hydrotreated Light		64742-47-8	80 - 90
Carbon Dioxide		124-38-9	2.5 - 10
Isopropyl Alcohol		67-63-0	2.5 - 10
d-Phenothrin		26002-80-2	0.1 - 1

Product name: JET FORCE WASP & HORNET KILLER Product #: 1000000940 Version #: 01 Issue date: 01-26-2015

Chemical name	Common name and synonyms	CAS number	%
Tetramethrin		7696-12-0	0.1 - 1
Other components below reports	Other components below reportable levels		1 - 2.5

#: This substance has workplace exposure limit(s).

vPvB: very persistent and very bioaccumulative substance.

PBT: persistent, bioaccumulative and toxic substance.

4. First-aid measures

InhalationIf symptoms develop move victim to fresh air. Get medical attention if symptoms persist.Skin contactWash off with soap and water. Get medical attention if irritation develops and persists.

Eye contact Rinse with water. Get medical attention if irritation develops and persists.

Ingestion Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If

Aspiration may cause pulmonary edema and pneumonitis.

vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Most important symptoms/effects, acute and

delayed

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.

General information Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

5. Fire-fighting measures

Suitable extinguishing media Unsuitable extinguishing media Alcohol resistant foam. Water fog. Dry chemical powder. Dry chemicals. Carbon dioxide (CO2).

Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

Contents under pressure. Pressurized container may explode when exposed to heat or flame.

Special protective equipment and precautions for firefighters

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

Fire-fighting equipment/instructions

Move containers from fire area if you can do so without risk. Cool containers exposed to heat with water spray and remove container, if no risk is involved. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.

Specific methods

Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not

breathe fumes.

General fire hazards Extremely flammable aerosol.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Use water spray to reduce vapors or divert vapor cloud drift. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground.

Product name: JET FORCE WASP & HORNET KILLER
Product #: 1000000940 Version #: 01 Issue date: 01-26-2015

^{*}Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

7. Handling and storage

Precautions for safe handling

Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Avoid prolonged or repeated contact with skin. Avoid prolonged exposure. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 3 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Store away from incompatible materials (see Section 10 of the SDS). Level 3 Aerosol.

8. Exposure controls/personal protection

Occupational exposure limits

IIS OSHA	Table 7-1	I imits for Air	Contaminants	(29 CFR	1910 1000)
US. USITA	I able 2-1	LIIIIILS IUI AII	Contaminants	123 666	. 1310.10001

Components	Type	Value
Carbon Dioxide (CAS 124-38-9)	PEL	9000 mg/m3
,		5000 ppm
Isopropyl Alcohol (CAS 67-63-0)	PEL	980 mg/m3
		400 ppm
US. ACGIH Threshold Limit Valu	ies	
Components	Туре	Value
Carbon Dioxide (CAS 124-38-9)	STEL	30000 ppm
,	TWA	5000 ppm
Isopropyl Alcohol (CAS 67-63-0)	STEL	400 ppm
,	TWA	200 ppm
US. NIOSH: Pocket Guide to Cho	emical Hazards	
Components	Туре	Value
Carbon Dioxide (CAS 124-38-9)	STEL	54000 mg/m3
,		30000 ppm
	TWA	9000 mg/m3
		5000 ppm
Isopropyl Alcohol (CAS 67-63-0)	STEL	1225 mg/m3
,		500 ppm
	TWA	980 mg/m3
		400 ppm
		• •

Biological limit values

ACGIH Biological Exposure Indices					
Components	Value	Determinant	Specimen	Sampling Time	
Isopropyl Alcohol (CAS 67-63-0)	40 mg/l	Acetone	Urine	*	

^{* -} For sampling details, please see the source document.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Face shield is recommended. Wear safety glasses with side shields (or goggles).

Hand protection Wear appropriate chemical resistant gloves.

Skin protection

Wear suitable protective clothing. Other

Respiratory protection If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an

air-supplied respirator.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

When using do not smoke. Always observe good personal hygiene measures, such as washing General hygiene considerations after handling the material and before eating, drinking, and/or smoking. Routinely wash work

clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Gas. **Form** Aerosol. Colorless. Color Solvent. Odor Odor threshold Not available.

Not available. pН Melting point/freezing point Not available.

Initial boiling point and boiling

range

180.5 °F (82.5 °C) estimated

Flash point 228.2 °F (109.0 °C) estimated

Not available. **Evaporation rate** Not available. Flammability (solid, gas) Upper/lower flammability or explosive limits

Flammability limit - lower

0.5 % estimated

(%)

Flammability limit - upper

(%)

Not available.

Not available. Explosive limit - lower (%) Explosive limit - upper (%) Not available.

90 - 110 psig @70F estimated Vapor pressure

Vapor density Not available. Not available. Relative density

Solubility(ies)

Solubility (water) Not available. Partition coefficient Not available.

(n-octanol/water)

421 °F (216.11 °C) estimated **Auto-ignition temperature**

Decomposition temperature Not available. Not available. **Viscosity**

Other information

Specific gravity 0.826 estimated

10. Stability and reactivity

The product is stable and non-reactive under normal conditions of use, storage and transport. Reactivity

Material is stable under normal conditions. Chemical stability Possibility of hazardous Hazardous polymerization does not occur.

reactions

Conditions to avoid Avoid temperatures exceeding the flash point. Contact with incompatible materials.

Incompatible materials Acids. Strong oxidizing agents. Isocyanates. Chlorine. No hazardous decomposition products are known. Hazardous decomposition

products

Product name: JET FORCE WASP & HORNET KILLER

Product #: 1000000940 Version #: 01 Issue date: 01-26-2015

11. Toxicological information

Information on likely routes of exposure

Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious Ingestion

chemical pneumonia.

Prolonged inhalation may be harmful. Inhalation

No adverse effects due to skin contact are expected. Skin contact Direct contact with eyes may cause temporary irritation. Eye contact Symptoms related to the

physical, chemical and toxicological characteristics Aspiration may cause pulmonary edema and pneumonitis.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways.

Product	Species	Test Results
JET FORCE WASP & HOR	RNET KILLER (CAS Mixture)	
Acute		
Dermal		
LD50	Rat	2237 mg/kg
Inhalation		
LC50	Rat	6 mg/l/4h
Oral		
LD50	Rat	
Components	Species	Test Results
Distillates (Petroleum), Hyd	drotreated Light (CAS 64742-47-8)	
Acute		
Dermal		
LD50	Rabbit	> 2000 mg/kg
		> 2000 mg/kg, 24 Hours
Inhalation		
LC50	Rat	> 7.5 mg/l, 6 Hours
		> 4.6 mg/l, 4 Hours
Oral		
LD50	Rat	> 5000 mg/kg
Isopropyl Alcohol (CAS 67-	-63-0)	
Acute		
Dermal		
LD50	Rabbit	16.4 ml/kg, 24 Hours
Inhalation		
LC50	Rat	> 10000 ppm, 6 Hours
Oral		
LD50	Rat	5.84 g/kg
Tetramethrin (CAS 7696-12	2-0)	
Acute		
Oral		
LD50	Rat	4640 mg/kg

^{*} Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation. Direct contact with eyes may cause temporary irritation. Serious eye damage/eye

irritation

Respiratory or skin sensitization

Respiratory sensitization Not available.

Product name: JET FORCE WASP & HORNET KILLER Product #: 1000000940 Version #: 01 Issue date: 01-26-2015 Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA. Carcinogenicity

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

This product is not expected to cause reproductive or developmental effects. Reproductive toxicity

Species

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Product

Not classified.

Aspiration hazard May be fatal if swallowed and enters airways.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity Toxic to aquatic life with long lasting effects.

Troduct		Opecies	i est i tesuits	
JET FORCE WASP &	HORNET KILLER	(CAS Mixture)		_
Aquatic				
Algae	IC50	Algae	11769 mg/L, 72 Hours	
Crustacea	EC50	Daphnia	629 mg/L, 48 Hours	
Fish	LC50	Fish	48.7193 mg/L, 96 Hours	
Components		Species	Test Results	
Distillates (Petroleum)	, Hydrotreated Ligh	nt (CAS 64742-47-8)		
Aquatic				
Fish	LC50	Rainbow trout,donaldson trout (Oncorhynchus mykiss)	2.9 mg/l, 96 hours	
Isopropyl Alcohol (CA	S 67-63-0)			
Aquatic				
Algae	IC50	Algae	1000.0001 mg/L, 72 Hours	
Crustacea	EC50	Daphnia	13299 mg/L, 48 Hours	
Fish	LC50	Bluegill (Lepomis macrochirus)	> 1400 mg/l, 96 hours	
Tetramethrin (CAS 76	96-12-0)			
Aquatic				
Fish	LC50	Carp (Cyprinus carpio)	0.095 - 0.16 mg/l, 96 hours	

^{*} Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available. Partition coefficient n-octanol / water (log Kow)

Isopropyl Alcohol 0.05 Tetramethrin 4.73

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation

potential, endocrine disruption, global warming potential) are expected from this component.

Test Results

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents

under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international

regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Product name: JET FORCE WASP & HORNET KILLER

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Empty containers should be taken to an approved waste handling site for recycling or disposal. Contaminated packaging

Since emptied containers may retain product residue, follow label warnings even after container is

emptied. Do not re-use empty containers.

14. Transport information

UN number UN1950

Aerosols, flammable **UN proper shipping name**

Transport hazard class(es)

2.1 Class Subsidiary risk None Label(s) 2.1

Packing group Not applicable.

Special precautions for user Read safety instructions, SDS and emergency procedures before handling. Read safety

instructions, SDS and emergency procedures before handling.

Special provisions N82 Packaging exceptions 306 Packaging non bulk None None Packaging bulk

This product meets the exception requirements of section 173.306 as a limited quantity and may be shipped as a limited quantity. Until 12/31/2020, the "Consumer Commodity - ORM-D" marking may still be used in place of the new limited quantity diamond mark for packages of UN 1950 Aerosols. Limited quantities require the limited quantity diamond mark on cartons after 12/31/20 and may be used now in place of the "Consumer Commodity ORM-D" marking and both may be displayed concurrently.

IATA

UN1950 **UN** number

Aerosols, flammable **UN proper shipping name**

Transport hazard class(es)

2.1 Subsidiary risk 2.1 Label(s)

Not applicable. **Packing group**

Yes **Environmental hazards**

Special precautions for user Read safety instructions, SDS and emergency procedures before handling. Read safety

instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo

aircraft

Forbidden.

Forbidden. Cargo aircraft only LTD QTY **Packaging Exceptions**

IMDG

UN number UN1950 **UN** proper shipping name **AEROSOLS**

Transport hazard class(es)

2.1 Class Subsidiary risk Label(s) 2.1

Packing group Not applicable.

Environmental hazards

Marine pollutant Yes

Not available.

Special precautions for user Read safety instructions, SDS and emergency procedures before handling. Read safety

instructions, SDS and emergency procedures before handling.

LTD QTY **Packaging Exceptions** Transport in bulk according to Not applicable.

Annex II of MARPOL 73/78 and

the IBC Code

Product name: JET FORCE WASP & HORNET KILLER

IATA; IMDG



Marine pollutant



15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes

Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous No

chemical

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
d-Phenothrin	26002-80-2	0.1 - 1
Tetramethrin	7696-12-0	0.1 - 1

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act

Not regulated.

(SDWA)

Product name: JET FORCE WASP & HORNET KILLER
Product #: 1000000940 Version #: 01 Issue date: 01-26-2015

Hazard statement

This chemical is a pesticide product registered by the United States Environmental Protection Agency and is subject to certain labeling requirements under federal pesticide law. These requirements differ from the classification criteria and hazard information required for safety data sheets (SDS), and for workplace labels of non-pesticide chemicals. The pesticide label also includes other important information, including directions for use.

CAUTION!

Harmful if absorbed through skin. Moderately irritating to the eyes.

US state regulations

US. Massachusetts RTK - Substance List

Carbon Dioxide (CAS 124-38-9) Isopropyl Alcohol (CAS 67-63-0)

US. New Jersey Worker and Community Right-to-Know Act

Carbon Dioxide (CAS 124-38-9) d-Phenothrin (CAS 26002-80-2) Isopropyl Alcohol (CAS 67-63-0) Tetramethrin (CAS 7696-12-0)

US. Pennsylvania Worker and Community Right-to-Know Law

Carbon Dioxide (CAS 124-38-9) Isopropyl Alcohol (CAS 67-63-0)

US. Rhode Island RTK

d-Phenothrin (CAS 26002-80-2) Isopropyl Alcohol (CAS 67-63-0) Tetramethrin (CAS 7696-12-0)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

Australian Inventory of Chemical Substances (AICS)

International Inventories

Australia

Country(s) or region

	,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,	
Canada	Domestic Substances List (DSL)	No
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
•	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	No
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	No
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s) A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Inventory name

01-26-2015 Issue date

Version # 01

Product #: 1000000940 Version #: 01 Issue date: 01-26-2015

On inventory (yes/no)*

Yes

Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. We cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.

FRSC Chemical Solutions'

SAFETY DATA SHEET

1. Identification

Product identifier Motor Medic Thrust Starting Fluid

Other means of identification

SDS number M3815 Part No. M3815

Tariff code 2909.11.0000

Recommended use Starting Fluid
Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name RSC Chemical Solutions Address 600 Radiator Road

Indian Trail, NC 28079

United States

Telephone Customer Service: (704) 821-7643

Technical: (704) 684-1811

Website www.rscbrands.com E-mail sds@rscbrands.com

Emergency phone number Emergency Telephone: (303) 623-5716

Emergency Contact: RMPDC (877-740-5015)

2. Hazard(s) identification

Physical hazardsFlammable aerosolsCategory 1Health hazardsAcute toxicity, oralCategory 4

Skin corrosion/irritation Category 2
Serious eye damage/eye irritation Category 2B
Carcinogenicity Category 1B

Specific target organ toxicity, single exposure Category 3 narcotic effects

Specific target organ toxicity, repeated

exposure

Environmental hazards Hazardous to the aquatic environment, acute Category 1

hazard

Hazardous to the aquatic environment, Category 1

long-term hazard

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Extremely flammable aerosol. Harmful if swallowed. Causes skin irritation. Causes eye irritation.

May cause drowsiness or dizziness. May cause cancer. Very toxic to aquatic life. Very toxic to

Category 2

aquatic life with long lasting effects.

Material name: Motor Medic Thrust Starting Fluid
M3815 Version #: 05 Revision date: 11-03-2015 Issue date: 05-07-2015

Precautionary statement

Prevention Obtain special instructions before use. Do not handle until all safety precautions have been read

and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection.

Response

If swallowed: Call a poison center/doctor if you feel unwell. If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. Rinse mouth. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash

before reuse. Collect spillage.

Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from Storage

sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Dispose of contents/container in accordance with local/regional/national/international regulations. Disposal

Hazard(s) not otherwise classified (HNOC)

None known.

Supplemental information

81.58% of the mixture consists of component(s) of unknown acute oral toxicity. 26.34% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 26.34% of the mixture consists of component(s) of unknown long-term hazards to the aquatic

environment.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Heptane		142-82-5	70 - < 80
ETHANE, 1,1'-OXYBIS-		60-29-7	10 - < 20
Carbon Dioxide		124-38-9	5 - < 10
Distillates (petroleum), Hydrotreated Light Naphthenic		64742-53-6	< 1
Hydrotreated Heavy Naphthenic Distillate (petroleum)		64742-52-5	< 1

^{*}Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON

CENTER or doctor/physician if you feel unwell.

Skin contact Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get

medical advice/attention. Wash contaminated clothing before reuse.

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if Eye contact

present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists.

Rinse mouth. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Ingestion

Get medical advice/attention if you feel unwell.

Most important symptoms/effects, acute and

delayed

May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of eyes. Exposed individuals may experience eye tearing, redness, and discomfort. Skin irritation. May cause redness and pain.

Indication of immediate medical attention and special treatment needed

General information

Provide general supportive measures and treat symptomatically. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media

Powder. Alcohol resistant foam. Carbon dioxide (CO2).

Unsuitable extinguishing media

Do not use water jet as an extinguisher, as this will spread the fire.

Material name: Motor Medic Thrust Starting Fluid

Specific hazards arising from the chemical

Special protective equipment and precautions for firefighters

Fire fighting equipment/instructions

Specific methods

Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed.

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.

Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not

breathe fumes.

General fire hazards Extremely flammable aerosol.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This material is classified as a water pollutant under the Clean Water Act and should be prevented from contaminating soil or from entering sewage and drainage systems which lead to waterways. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.

7. Handling and storage

Precautions for safe handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 3 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Keep out of the reach of children. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Туре	Value	Form	
Carbon Dioxide (CAS 124-38-9)	PEL	9000 mg/m3		
		5000 ppm		
Distillates (petroleum), Hydrotreated Light Naphthenic (CAS 64742-53-6)	PEL	5 mg/m3	Mist.	
7.7.2.7.2.2		2000 mg/m3		

SDS US

Components	Туре	Value	Form
		500 ppm	
ETHANE, 1,1'-OXYBIS-	PEL	1200 mg/m3	
(CAS 60-29-7)	1	.200	
(0 00 20 .)		400 ppm	
Heptane (CAS 142-82-5)	PEL	2000 mg/m3	
neplane (CAS 142-62-5)	FEL		
in a constant property		500 ppm	in-
Hydrotreated Heavy	PEL	5 mg/m3	Mist.
Naphthenic Distillate			
(petroleum) (CAS			
64742-52-5)		1222	
		2000 mg/m3	
		500 ppm	
US. ACGIH Threshold Limi			
Components	Туре	Value	Form
Carbon Dioxide (CAS	STEL	30000 ppm	
124-38-9)	TIMA	F000	
A. Silver of the State of the St.	TWA	5000 ppm	
Distillates (petroleum),	TWA	5 mg/m3	Inhalable fraction.
Hydrotreated Light			
Naphthenic (CAS			
64742-53-6)	OTE:	F00 ====	
ETHANE, 1,1'-OXYBIS-	STEL	500 ppm	
(CAS 60-29-7)	T1444	100	
	TWA	400 ppm	
Heptane (CAS 142-82-5)	STEL	500 ppm	
	TWA	400 ppm	
Hydrotreated Heavy	TWA	5 mg/m3	Inhalable fraction.
Naphthenic Distillate			
(petroleum) (CAS			
64742-52-5)			
US. NIOSH: Pocket Guide t	o Chemical Hazards		
Components	Туре	Value	Form
Carbon Dioxide (CAS	STEL	54000 mg/m3	
124-38-9)			
		30000 ppm	
	TWA	9000 mg/m3	
		5000 ppm	
Distillates (petroleum),	Ceiling	1800 mg/m3	
Hydrotreated Light	3	3	
Naphthenic (CAS			
64742-53-6)			
	STEL	10 mg/m3	Mist.
Heptane (CAS 142-82-5)	Ceiling	1800 mg/m3	
	309	440 ppm	
	TWA	350 mg/m3	
	IWA		
10.404.004.111	0 ""	85 ppm	
Hydrotreated Heavy Naphthenic Distillate (petroleum) (CAS	Ceiling	1800 mg/m3	
64742-52-5)	CTEL	10 ma/m2	Mint
a minori ilimita control	STEL	10 mg/m3	Mist.
ogical limit values	No biological exposure limits noted for the ing		and Marshard and
ropriate engineering trols	Good general ventilation (typically 10 air chan should be matched to conditions. If applicable or other engineering controls to maintain airbo exposure limits have not been established, materials.	e, use process enclosur orne levels below recor	res, local exhaust ventilat mmended exposure limits

wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Chemical respirator with organic vapor cartridge and full facepiece. Eye/face protection

Skin protection

Hand protection Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove

supplier.

Other Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.

Respiratory protection Chemical respirator with organic vapor cartridge and full facepiece.

Wear appropriate thermal protective clothing, when necessary. Thermal hazards

General hygiene considerations

When using do not smoke. Keep away from food and drink. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

Physical and chemical properties

Liquid. Clear. **Appearance**

Liquid. Physical state Form Aerosol. Color Colorless Ester-like. Odor Not available. Odor threshold Not available.

Melting point/freezing point -189.94 °F (-123.3 °C) estimated -109.3 °F (-78.5 °C) estimated Initial boiling point and boiling

range

Flash point -1.0 °F (-18.3 °C) Tag Closed Cup

Evaporation rate Not available. Flammability (solid, gas) Not applicable. Upper/lower flammability or explosive limits

Flammability limit - lower

1.9 % estimated

Flammability limit - upper

36.5 % estimated

Explosive limit - lower (%) Not available. Not available. Explosive limit - upper (%)

4083.55 hPa estimated Vapor pressure

Not available. Vapor density Relative density Not available.

Solubility(ies)

Solubility (water) Partial Solubility Not available. Partition coefficient

(n-octanol/water)

320 °F (160 °C) estimated Auto-ignition temperature

Not available. **Decomposition temperature** Not available. Viscosity

Other information

5.75 lbs/gal Density **Explosive properties** Not explosive.

Flammable IA estimated Flammability class Heat of combustion (NFPA 30.83 kJ/g estimated

30B)

Oxidizing properties Not oxidizing. Percent volatile 18.42 % estimated

Specific gravity

VOC (Weight %) 93 %

10. Stability and reactivity

ReactivityThe product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous

reactions

No dangerous reaction known under conditions of normal use.

Conditions to avoid Avoid temperatures exceeding the flash point. Contact with incompatible materials.

Incompatible materials Strong oxidizing agents. Aluminum.

Hazardous decomposition

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be

harmful.

Skin contact Causes skin irritation.

Eye contact Causes eye irritation.

Ingestion Harmful if swallowed.

Symptoms related to the physical, chemical and toxicological characteristics

Headache. May cause drowsiness and dizziness. Nausea, vomiting. Irritation of eyes. Exposed individuals may experience eye tearing, redness, and discomfort. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity Harmful if swallowed. Narcotic effects.

Components Species Test Results

ETHANE, 1,1'-OXYBIS- (CAS 60-29-7)

Acute Inhalation

LC50 Rat 32000 ppm, 4 Hours

Oral

LD50 Rat 3230 - 3920 mg/kg

Heptane (CAS 142-82-5)

Acute

Inhalation

LC50 Rat 103 mg/l, 4 Hours LD50 Mouse 75 mg/l, 2 Hours

Skin corrosion/irritation Causes skin irritation.
Serious eve damage/eve Causes eve irritation.

irritation

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity

No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity May cause cancer.

IARC Monographs. Overall Evaluation of Carcinogenicity

ETHANE, 1,1'-OXYBIS- (CAS 60-29-7)

3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

US. National Toxicology Program (NTP) Report on Carcinogens

Distillates (petroleum), Hydrotreated Light Naphthenic Known To Be Human Carcinogen.

(CAS 64742-53-6)

^{*} Estimates for product may be based on additional component data not shown.

Hydrotreated Heavy Naphthenic Distillate (petroleum) Known To Be Human Carcinogen.

(CAS 64742-52-5) Reproductive toxicity

This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity -

single exposure

May cause drowsiness and dizziness.

Specific target organ toxicity -

repeated exposure

Not classified.

Not an aspiration hazard. Aspiration hazard

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity Very toxic to aquatic life with long lasting effects.

Test Results Components Species ETHANE, 1,1'-OXYBIS- (CAS 60-29-7)

Aquatic

LC50 Fish

Fathead minnow (Pimephales promelas) 2560 mg/l, 96 hours

Heptane (CAS 142-82-5)

Aquatic

Fish LC50 Mozambique tilapia (Tilapia

375 mg/l, 96 hours

mossambica)

No data is available on the degradability of this product. Persistence and degradability

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

ETHANE, 1,1'-OXYBIS-0.89 Heptane 4.66

No data available. Mobility in soil

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation

potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents

under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international

regulations.

Local disposal regulations

Dispose in accordance with all applicable regulations.

Hazardous waste code

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging

Since emptied containers may retain product residue, follow label warnings even after container is

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal. Do not re-use empty containers.

14. Transport information

DOT

UN number Not available.

UN proper shipping name Transport hazard class(es) Consumer Commodity

Class ORM-D

Subsidiary risk

Environmental hazards

Packing group

Not applicable.

Marine pollutant Yes

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Material name: Motor Medic Thrust Starting Fluid

M3815 Version #: 05 Revision date: 11-03-2015 Issue date: 05-07-2015

^{*} Estimates for product may be based on additional component data not shown.

Special provisions T75, TP5 Packaging exceptions 306 Packaging non bulk 304 Packaging bulk 314, 315

IATA

UN number UN1950

UN proper shipping name Aerosols, Flammable (Starting Fluid)

Transport hazard class(es)

2.1 Class Subsidiary risk

Not applicable. Packing group

Environmental hazards ERG Code 9L

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo

Allowed.

aircraft

Cargo aircraft only

Allowed.

IMDG

UN number UN1950

UN proper shipping name Aerosols (ILimited QtY)

Transport hazard class(es)

Class 2.1

Subsidiary risk Packing group

Not applicable.

Not established.

Environmental hazards

Marine pollutant Yes **EmS** F-D, S-U

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to

Annex II of MARPOL 73/78 and the IBC Code

IATA; IMDG



Marine pollutant



General information IMDG Regulated Marine Pollutant. DOT Regulated Marine Pollutant.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

ETHANE, 1,1'-OXYBIS- (CAS 60-29-7) Listed. Heptane (CAS 142-82-5) Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - Yes
Fire Hazard - Yes

Pressure Hazard - No Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous No

chemical

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

ETHANE, 1,1'-OXYBIS- (CAS 60-29-7)

Safe Drinking Water Act

Not regulated.

(SDWA)

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

6584

ETHANE, 1,1'-OXYBIS- (CAS 60-29-7)

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

ETHANE, 1.1'-OXYBIS- (CAS 60-29-7) 35 %WV

DEA Exempt Chemical Mixtures Code Number

ETHANE, 1,1'-OXYBIS- (CAS 60-29-7) 6584

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd.

(a))

Distillates (petroleum), Hydrotreated Light Naphthenic (CAS 64742-53-6) Hydrotreated Heavy Naphthenic Distillate (petroleum) (CAS 64742-52-5)

US. Massachusetts RTK - Substance List

Carbon Dioxide (CAS 124-38-9)

Distillates (petroleum), Hydrotreated Light Naphthenic (CAS 64742-53-6)

ETHANE, 1,1'-OXYBIS- (CAS 60-29-7)

Heptane (CAS 142-82-5)

Hydrotreated Heavy Naphthenic Distillate (petroleum) (CAS 64742-52-5)

US. New Jersey Worker and Community Right-to-Know Act

Carbon Dioxide (CAS 124-38-9)

ETHANE, 1,1'-OXYBIS- (CAS 60-29-7)

Heptane (CAS 142-82-5)

US. Pennsylvania Worker and Community Right-to-Know Law

Carbon Dioxide (CAS 124-38-9)

ETHANE, 1,1'-OXYBIS- (CAS 60-29-7)

Heptane (CAS 142-82-5)

US. Rhode Island RTK

ETHANE, 1,1'-OXYBIS- (CAS 60-29-7)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s) A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 05-07-2015 11-03-2015 **Revision date**

Version # 05

Health: 2* HMIS® ratings

Flammability: 4

Physical hazard: 0

NFPA ratings Health: 2

Flammability: 4 Instability: 0

NFPA ratings



The information provided in this Safety Data Sheet is correct to the best of our knowledge, Disclaimer

information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other

materials or in any process, unless specified in the text.

Physical & Chemical Properties: Multiple Properties **Revision Information**

Transport Information: Material Transportation Information

Material name: Motor Medic Thrust Starting Fluid

10/10 M3815 Version #: 05 Revision date: 11-03-2015 Issue date: 05-07-2015

Oatey®

SAFETY DATA SHEET

1. Identification

Product identifier Oatey PVC Heavy Duty Clear or Gray Cement

Other means of identification

SDS number 1102E

Synonyms Part Numbers: Clear 30850, 30863, 30876(TV), 30882, 31008(TV), 31011, 31950, 31951, 31952,

31953 Gray 30349, 31093, 31094, 31095, 31105, 31118, 31978, 31979, 31980, 31981, 32050,

32051, 32052, 32210, 32211

Recommended use Joining PVC Pipes
Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Company Name Oatey Co.

Address 4700 West 160th St.

Cleveland, OH 44135

Telephone 216-267-7100 E-mail info@oatey.com

Transport Emergency Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887)

Emergency First Aid 1-877-740-5015
Contact person MSDS Coordinator

2. Hazard(s) identification

Physical hazards Flammable liquids Category 2
Health hazards Acute toxicity, oral Category 4

Acute toxicity, oral Category 4
Skin corrosion/irritation Category 2

Serious eye damage/eye irritation Category 2A

Specific target organ toxicity, single exposure Category 3 respiratory tract irritation

Specific target organ toxicity, single exposure Category 3 narcotic effects

Aspiration hazard Category 1

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters

airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May

cause drowsiness or dizziness.

Precautionary statement

Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use only outdoors or in a

well-ventilated area. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Wear protective

gloves/protective clothing/eye protection/face protection.

Response Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If

eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash

before reuse. In case of fire: Use appropriate media to extinguish.

Storage Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Oatey PVC Heavy Duty Clear or Gray Cement

SDS US

920700 Version #: 02 Revision date: 15-December-2014 Issue date: 04-August-2014

Hazard(s) not otherwise classified (HNOC)

Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides. Contains a chemical classified by the US EPA as a suspected possible carcinogen.

Supplemental information

Not applicable.

3. Composition/information on ingredients

Mixtures

Chemical name	CAS number	% 30-60	
Furan, Tetrahydro-	109-99-9		
2-Propanone	67-64-1	10-30	
Cyclohexanone	108-94-1	10-30	
Polyvinyl chloride	9002-86-2	10-30	
Methyl ethyl ketone	78-93-3	5-10	
Colloidal silicon dioxide	112945-52-5	1-5	

^{*}Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Eye contact

Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON Inhalation CENTER or doctor/physician if you feel unwell.

Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin Skin contact irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before

> Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs, Ingestion keep head low so that stomach content doesn't get into the lungs. Aspiration may cause

pulmonary edema and pneumonitis.

cause redness and pain.

reuse

Most important symptoms/effects, acute and delayed

Indication of immediate

medical attention and special treatment needed

General information

Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. Vapors have a narcotic effect and may cause headache, fatigue, dizziness and nausea. May

Take off all contaminated clothing immediately. IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media Unsuitable extinguishing media

Specific hazards arising from the chemical

Special protective equipment and precautions for firefighters

Fire fighting equipment/instructions

Specific methods General fire hazards Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).

Do not use water jet as an extinguisher, as this will spread the fire.

Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed.

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk.

Use standard firefighting procedures and consider the hazards of other involved materials.

Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid inhalation of vapors or mists. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Use water spray to reduce vapors or divert vapor cloud drift. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

Environmental precautions

7. Handling and storage Precautions for safe handling

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Do not taste or swallow. Avoid breathing mist or vapor. Avoid contact with skin. Avoid contact with eyes. Avoid prolonged exposure. Avoid contact with clothing. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. When using, do not eat, drink or smoke. Wash hands thoroughly after handling.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in original tightly closed container. Store in a cool, dry place out of direct sunlight. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS). Keep in an area equipped with sprinklers.

.....

Earm

8. Exposure controls/personal protection

Occupational exposure limits

U.S. - OSHA

Components	Туре	Value	Form
Colloidal silicon dioxide (CAS 112945-52-5)	TWA	0.8 mg/m3	Unspecified.
		20 mppcf	Unspecified.
US. OSHA Specifically Regulated	Substances (29 CFR 1910.1001-10	950)	
Components	Туре	Value	
Polyvinyl chloride (CAS 9002-86-2)	STEL	5 ppm	
	TWA	1 ppm	
US. OSHA Table Z-1 Limits for Air	Contaminants (29 CFR 1910.1000		
Components	Туре	Value	Form
2-Propanone (CAS 67-64-1)	PEL	2400 mg/m3	
		1000 ppm	
Cyclohexanone (CAS 108-94-1)	PEL	200 mg/m3	
		50 ppm	
Furan, Tetrahydro- (CAS 109-99-9)	PEL	590 mg/m3	
		200 ppm	

Typo

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Туре	Value	Form
Methyl ethyl ketone (CAS	PEL	590 mg/m3	
78-93-3)		200 ppm	
Polyvinyl chloride (CAS	PEL	5 mg/m3	Respirable fraction.
9002-86-2)		15 mg/m3	Total dust.
US. OSHA Table Z-3 (29 CFR 1910.	1000)	To Highio	rotal duot.
Components	Туре	Value	
Colloidal silicon dioxide	TWA	0.8 mg/m3	
(CAS 112945-52-5)		20 mppcf	
US. ACGIH Threshold Limit Values	i	T. C. C.	
Components	Туре	Value	Form
2-Propanone (CAS 67-64-1)	STEL	750 ppm	
	TWA	500 ppm	
Cyclohexanone (CAS 108-94-1)	STEL	50 ppm	
100 0 1 1)	TWA	20 ppm	
Furan, Tetrahydro- (CAS 109-99-9)	STEL	100 ppm	
	TWA	50 ppm	
Methyl ethyl ketone (CAS 78-93-3)	STEL	300 ppm	
47.27.2.	TWA	200 ppm	
Polyvinyl chloride (CAS 9002-86-2)	TWA	1 mg/m3	Respirable fraction.
U.S NIOSH			
Components	Туре	Value	Form
Colloidal silicon dioxide	REL	6 mg/m3	Unspecified.
(CAS 112945-52-5)			
	ical Hazards		
US. NIOSH: Pocket Guide to Chem		Value	
US. NIOSH: Pocket Guide to Chem Components	Туре	Value	
US. NIOSH: Pocket Guide to Chem Components 2-Propanone (CAS 67-64-1)		590 mg/m3	
US. NIOSH: Pocket Guide to Chem Components 2-Propanone (CAS 67-64-1)	Type TWA	590 mg/m3 250 ppm	
US. NIOSH: Pocket Guide to Chem Components 2-Propanone (CAS 67-64-1) Colloidal silicon dioxide	Туре	590 mg/m3	
US. NIOSH: Pocket Guide to Chem Components 2-Propanone (CAS 67-64-1) Colloidal silicon dioxide (CAS 112945-52-5) Cyclohexanone (CAS	Type TWA	590 mg/m3 250 ppm	
Components 2-Propanone (CAS 67-64-1) Colloidal silicon dioxide (CAS 112945-52-5) Cyclohexanone (CAS	Type TWA TWA	590 mg/m3 250 ppm 6 mg/m3	
Components 2-Propanone (CAS 67-64-1) Colloidal silicon dioxide (CAS 112945-52-5) Cyclohexanone (CAS 108-94-1) Furan, Tetrahydro- (CAS	Type TWA TWA	590 mg/m3 250 ppm 6 mg/m3 100 mg/m3 25 ppm 735 mg/m3	
Components 2-Propanone (CAS 67-64-1) Colloidal silicon dioxide (CAS 112945-52-5) Cyclohexanone (CAS 108-94-1) Furan, Tetrahydro- (CAS	Type TWA TWA TWA	590 mg/m3 250 ppm 6 mg/m3 100 mg/m3 25 ppm	
US. NIOSH: Pocket Guide to Chem Components	Type TWA TWA TWA	590 mg/m3 250 ppm 6 mg/m3 100 mg/m3 25 ppm 735 mg/m3 250 ppm 590 mg/m3	
Components 2-Propanone (CAS 67-64-1) Colloidal silicon dioxide (CAS 112945-52-5) Cyclohexanone (CAS 108-94-1) Furan, Tetrahydro- (CAS 109-99-9)	Type TWA TWA TWA STEL TWA	590 mg/m3 250 ppm 6 mg/m3 100 mg/m3 25 ppm 735 mg/m3 250 ppm 590 mg/m3 200 ppm	
Components 2-Propanone (CAS 67-64-1) Colloidal silicon dioxide (CAS 112945-52-5) Cyclohexanone (CAS 108-94-1) Furan, Tetrahydro- (CAS 109-99-9) Methyl ethyl ketone (CAS	Type TWA TWA TWA STEL	590 mg/m3 250 ppm 6 mg/m3 100 mg/m3 25 ppm 735 mg/m3 250 ppm 590 mg/m3	
Components 2-Propanone (CAS 67-64-1) Colloidal silicon dioxide (CAS 112945-52-5) Cyclohexanone (CAS 108-94-1) Furan, Tetrahydro- (CAS 109-99-9)	Type TWA TWA TWA STEL TWA	590 mg/m3 250 ppm 6 mg/m3 100 mg/m3 25 ppm 735 mg/m3 250 ppm 590 mg/m3 200 ppm	
Components 2-Propanone (CAS 67-64-1) Colloidal silicon dioxide (CAS 112945-52-5) Cyclohexanone (CAS 108-94-1) Furan, Tetrahydro- (CAS 109-99-9) Methyl ethyl ketone (CAS	Type TWA TWA TWA STEL TWA	590 mg/m3 250 ppm 6 mg/m3 100 mg/m3 25 ppm 735 mg/m3 250 ppm 590 mg/m3 200 ppm 885 mg/m3	

Biological limit values

ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time	
2-Propanone (CAS 67-64-	1)50 mg/l	Acetone	Urine	*	
Cyclohexanone (CAS 108-94-1)	80 mg/l	1,2-Cyclohexan ediol, with hydrolysis	Urine	*	
	8 mg/l	Cyclohexanol, with hydrolysis	Urine	•	
Furan, Tetrahydro- (CAS 109-99-9)	2 mg/l	Tetrahydrofura n	Urine	*	
Methyl ethyl ketone (CAS 78-93-3)	2 mg/l	MEK	Urine	*	

^{* -} For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1) Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Furan, Tetrahydro- (CAS 109-99-9)

Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1)

Can be absorbed through the skin.

Appropriate engineering

controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves.

Other Wear appropriate chemical resistant clothing.

limits (where applicable) or to an acceptable level (in countries where exposure limits have not

been established), an approved respirator must be worn.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations When using, do not eat, drink or smoke. Wash hands after handling and before eating.

9. Physical and chemical properties

Appearance Opaque.or Translucent.

Physical state Liquid.

Form Liquid.

Color Gray or Clear.

Odor Solvent.
Odor threshold Not available.
pH Not available.
Melting point/freezing point Not available.

Initial boiling point and boiling

151 °F (66.11 °C)

range

Flash point 14.0 - 23.0 °F (-10.0 - -5.0 °C)

Evaporation rate 5.5 - 8

Oatey PVC Heavy Duty Clear or Gray Cement

920700 Version #: 02 Revision date: 15-December-2014 Issue date: 04-August-2014

Flammability (solid, gas) Not available.

Upper/lower flammability or explosive limits

(%)

Flammability limit - upper

Flammability limit - lower

Not available.

Not available.

(%)

Explosive limit - lower (%) Not available.

Explosive limit - upper (%) Not available.

Vapor pressure 145 mm Hg @ 20 C

Vapor density 2.5

Relative density 0.88 - 0.92

Solubility(ies)

Solubility (water) Negligible

Partition coefficient Not available.

(n-octanol/water)

Auto-ignition temperature Not available.

Decomposition temperature Not available.

Viscosity 1200 - 2500 cP

Other information

Bulk density 7.5 lb/gal

VOC (Weight %) 481 g/l SQACMD Method 304

10. Stability and reactivity

Reactivity The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous

reactions

No dangerous reaction known under conditions of normal use.

Conditions to avoid Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the

flash point. Contact with incompatible materials.

Incompatible materials Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics.

Hazardous decomposition

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May be fatal if swallowed and enters airways. Vapors have a narcotic effect and may cause

headache, fatigue, dizziness and nausea. Prolonged inhalation may be harmful. May cause

irritation to the respiratory system.

Skin contact Causes skin irritation.

Eye contact Causes serious eye irritation.

Ingestion May be fatal if swallowed and enters airways. Harmful if swallowed.

Symptoms related to the physical, chemical and toxicological characteristics Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May

cause redness and pain. Symptoms of overexposure may be headache, dizziness, tiredness,

nausea and vomiting.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects. May cause respiratory irritation.

Components Species Test Results

Cyclohexanone (CAS 108-94-1)

Acute Dermal

LD50 Rabbit 948 mg/kg

Inhalation

LC50 Rat 8000 ppm, 4 hours

Oatey PVC Heavy Duty Clear or Gray Cement

SDS US

920700 Version #: 02 Revision date: 15-December-2014 Issue date: 04-August-2014

Components Species Test Results

Oral

LD50 Rat 1540 mg/kg

Skin corrosion/irritation

Causes skin irritation.

Serious eye damage/eye

irritation

Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Suspected of causing cancer. In 2012 USEPA Integrated Risk Information System (IRIS)

reviewed a two species inhalation lifetime study on THF conducted by NTP (1998). Male rats developed renal tumors and female mice developed liver tumors while neither the female rats nor the male mice showed similar results. Because the carcinogenic mechanisms could not be identified clearly in either species for either tumor, the EPA determined that the male rat and female mouse findings are relevant to the assessment of carcinogenic potential in humans. Therefore, the IRIS review concludes that these data in aggregate indicate that there is "suggestive evidence of carcinogenic potential" following exposure to THF by all routes of exposure. This product contains polyvinyl chloride (PVC) that is not a fabricated product, and is therefore, defined and regulated as a toxic and hazardous substance under 29 C.F.R. §

1910.1017 due to the presumed presence of residual vinyl chloride monomer. The concentrations of residual vinyl chloride calculated to be contained in this product are well below the threshold for

classification in accordance with 29 C.F.R. § 1910.1200.

IARC Monographs. Overall Evaluation of Carcinogenicity

Colloidal silicon dioxide (CAS 112945-52-5)

Cyclohexanone (CAS 108-94-1)

Polyvinyl chloride (CAS 9002-86-2)

3 Not classifiable as to carcinogenicity to humans.
3 Not classifiable as to carcinogenicity to humans.
3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Polyvinyl chloride (CAS 9002-86-2) Cancer

Reproductive toxicity

This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity -

single exposure

Respiratory tract irritation. Narcotic effects.

Specific target organ toxicity -

repeated exposure

Not classified.

Aspiration hazard May be fatal if swallowed and enters airways.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity

The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Components Species Test Results

Cyclohexanone (CAS 108-94-1)

Aquatic

Fish LC50 Fathead minnow (Pimephales promelas) 481 - 578 mg/l, 96 hours

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow) 2-Propanone (CAS 67-64-1)

 2-Propanone (CAS 67-64-1)
 -0.24

 Cyclohexanone (CAS 108-94-1)
 0.81

 Furan, Tetrahydro- (CAS 109-99-9)
 0.46

 Methyl ethyl ketone (CAS 78-93-3)
 0.29

Mobility in soil No data available.

^{*} Estimates for product may be based on additional component data not shown.

^{*} Estimates for product may be based on additional component data not shown.

Other adverse effects

No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material

and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international

regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal.

Since emptied containers may retain product residue, follow label warnings even after container is

emptied.

14. Transport information

DOT

UN number UN1133 UN proper shipping name Adhesives

Transport hazard class(es)

Class 3
Subsidiary risk Label(s) 3
Packing group II

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisions T11, TP1, TP8, TP27

Packaging exceptions 150
Packaging non bulk 201
Packaging bulk 243

IATA

UN number UN1133 UN proper shipping name Adhesives

Transport hazard class(es)

Class 3
Subsidiary risk Packing group II
Environmental hazards No.
ERG Code 3L

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1133 UN proper shipping name ADHESIVES

Transport hazard class(es)

Class 3
Subsidiary risk Packing group ||
Environmental hazards

Marine pollutant No. EmS F-E, S-D

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Not available. Annex II of MARPOL 73/78 and

the IBC Code

Oatey PVC Heavy Duty Clear or Gray Cement

SDS US

920700 Version #: 02 Revision date: 15-December-2014 Issue date: 04-August-2014

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Polyvinyl chloride (CAS 9002-86-2)

Cancer

Central nervous system

Liver Blood Flammability

CERCLA Hazardous Substance List (40 CFR 302.4)

2-Propanone (CAS 67-64-1) LISTED
Cyclohexanone (CAS 108-94-1) LISTED
Furan, Tetrahydro- (CAS 109-99-9) LISTED
Methyl ethyl ketone (CAS 78-93-3) LISTED

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Immediate Hazard - Yes Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous

No

chemical

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act

Not regulated.

(SDWA)

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

2-Propanone (CAS 67-64-1) 6532 Methyl ethyl ketone (CAS 78-93-3) 6714

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

2-Propanone (CAS 67-64-1) 35 %WV Methyl ethyl ketone (CAS 78-93-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

2-Propanone (CAS 67-64-1) 6532 Methyl ethyl ketone (CAS 78-93-3) 6714

US state regulations

US. Massachusetts RTK - Substance List

2-Propanone (CAS 67-64-1)

Colloidal silicon dioxide (CAS 112945-52-5)

Cyclohexanone (CAS 108-94-1) Furan, Tetrahydro- (CAS 109-99-9) Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

2-Propanone (CAS 67-64-1) Cyclohexanone (CAS 108-94-1) Furan, Tetrahydro- (CAS 109-99-9) Methyl ethyl ketone (CAS 78-93-3) Polyvinyl chloride (CAS 9002-86-2)

US. Pennsylvania Worker and Community Right-to-Know Law

2-Propanone (CAS 67-64-1)

Colloidal silicon dioxide (CAS 112945-52-5)

Cyclohexanone (CAS 108-94-1) Furan, Tetrahydro- (CAS 109-99-9) Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

2-Propanone (CAS 67-64-1) Cyclohexanone (CAS 108-94-1) Furan, Tetrahydro- (CAS 109-99-9) Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins. This product contains trace amounts of chemicals known to the state of California to cause cancer. Under normal use conditions, exposure to these chemicals at levels above the State of California "No significant Risk Level" (NSRL) are unlikely. The use of proper personal protective equipment (PPE) and ventilation guidelines noted in Section 8 will minimize exposure levels to these chemicals.

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

^{*}A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 04-August-2014
Revision date 05-December-2014

Version # 02

HMIS® ratings Health: 2

Flammability: 3 Physical hazard: 0

Disclaimer The information in the sheet was written based on the best knowledge and experience currently

available.

Oatey PVC Heavy Duty Clear or Gray Cement

SDS US

920700 Version #: 02 Revision date: 15-December-2014 Issue date: 04-August-2014

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).



SAFETY DATA SHEET

1. Identification

Product identifier Oatey Clear Cleaner

Other means of identification

Product code 1400E

Synonyms Part Numbers: 30766, 30779, 30782, 30795, 30805, 32216, 32217, 32218, 32219

Recommended use Cleaning PVC, CPVC or ABS pipe and fittings

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Company Name Oatey Inc.

Address 4700 West 160th Street

Cleveland, OH 44135

 Telephone
 216-267-7100

 E-mail
 info@oatey.com

Transport Emergency Chemtrec 1-800-424-9300 (Outside the US 1-703-527-3887)

Emergency First Aid 1-877-740-5015
Contact person MSDS Coordinator

2. Hazard(s) identification

 Physical hazards
 Flammable liquids
 Category 2

 Health hazards
 Acute toxicity, oral
 Category 4

 Skin corrosion/irritation
 Category 2

Serious eye damage/eye irritation Category 2A

Specific target organ toxicity, single exposure Category 3 respiratory tract irritation

Specific target organ toxicity, single exposure Category 3 narcotic effects

Aspiration hazard Category 1

OSHA defined hazards

Label elements

Not Classified



Signal word Danger

Hazard statement Highly flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters

airways. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation.

May cause drowsiness or dizziness.

Precautionary statement

Prevention Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly

closed. Ground/bond container and receiving equipment. Use explosion-proof

electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection.

Response If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and

keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes.

Oatey Clear Cleaner SDS # 1400E Version #: 01 Revision date: Issue date: 27-May-2015 Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish.

Store in a well-ventilated place. Keep container tightly closed. Keep cool. Store locked up. Dispose of contents/container in accordance with local/regional/national/international

regulations.

Hazard(s) not otherwise classified (HNOC)

Storage

Disposal

Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis. May form explosive peroxides.

3. Composition/information on ingredients

Mixtures

Chemical name	CAS number	%	
Acetone	67-64-1	75-95	
Cyclohexanone	108-94-1	1-5	
Methy ethyl ketone	78-93-3	0-5	

^{*}Designates that a specific chemical identity and or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a

POISON CENTER or doctor/physician if you feel unwell.

Skin contact Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin

irritation occurs: Get medical advice/attention.

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if

present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. Call a physician or poison control center immediately. Do not induce vomiting. If vomiting occurs,

keep head low so that stomach content doesn't get into the lungs. Aspiration may cause

pulmonary edema and pneumonitis.

Most important symptoms/effects, acute and

delayed
Indication of immediate medical

attention and special treatment

Needed

Ingestion

General information

Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May cause respiratory irritation. Vapors have a narcotic effect and may cause headache, fatigue,

dizziness and nausea. Skin irritation. May cause redness and pain.

Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media Unsuitable extinguishing media Specific hazards arising from

Special protective equipment and precautions for firefighters

Fire-fighting equipment/instructions

the chemical

Specific methods General fire hazards Alcohol resistant foam, Water fog. Dry chemical powder. Carbon dioxide (CO2).

Do not use water jet as an extinguisher, as this will spread the fire.

Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed. Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can

In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk.

Use standard firefighting procedures and consider the hazards of other involved materials. Highly flammable liquid and vapor. This product contains tetrahydrofuran that may form explosive organic peroxide when exposed to air or light or with age.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist

Oatey Clear Cleaner SDS # 1400E Version #: 01 Revision date: Issue date: 27-May-2015

Methods and materials for containment and cleaning up

or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Take precautionary measures against static discharge. Use only non-sparking tools. Keep combustibles (wood, paper, oil, etc.) away from spilled material. This product is miscible in

Large Spills: Stop the flow of material, if this is without risk, Use water spray to reduce vapors or divert vapor cloud drift. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original container for reuse. For waste disposal, see sect. 13 of the SDS.

Environmental precautions

7. Handling and storage

Precautions for safe handling

Avoid discharge into drains, water courses or onto the ground.

Vapors may form explosive mixtures with air. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Components	Туре	Value FORM	
Acetone (CAS 67-64-1)	PEL	2400 mg/m3	
		1000 ppm	
Cyclohexanone (CAS 108-94-1)	PEL	200 mg/m3	
		50 ppm	
Methyl ethyl ketone (CAS 78-93-3)	PEL	590 mg/m3	
		200 pp,	
US. ACGIH Threshold Limit Values			
Components	Туре	Value FORM	
Acetone (CAS 67-64-1)	STEL	750 ppm	
	TWA	500 ppm	
Cyclohexanone (CAS 108-94-1)	STEL	50 ppm	
Methyl ethyl ketone (CAS 78-93-3)	STEL	300 ppm	
	TWA	200 ppm	
US. NIOSH: Pocket Guide to Chemical H	azards		
Components	Туре	Value	

Oatey Clear Cleaner Issue date: 27-May-2015

Acetone (CAS 67-64-1)	TWA	590 mg/m3
		250 ppm
Cyclohexanone (CAS 108-94-1)	TWA	100 mg/m3
		25 ppm
Methyl ethyl ketone (CAS 78-93-3)	STEL	885 mg/m3
		300 ppm
	TWA	590 mg/m3
		200 ppm

Biological limit values

ACGIH Biological Exposure Indices

Exposure guidelines

US - California OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Cyclohexanone (CAS 108-94-1) Skin designation applies.

US - Tennessee OELs: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

US. NIOSH: Pocket Guide to Chemical Hazards

Cyclohexanone (CAS 108-94-1) Can be absorbed through the skin.

Appropriate engineering

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air controls changes per hour) should be used. Ventilation rates should be matched to conditions. If

applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency

shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Face shield is recommended. Wear safety glasses with side shields (or goggles).

Skin protection

Hand Wear appropriate chemical resistant gloves. Other Wear appropriate chemical resistant clothing.

Respiratory protection If engineering controls do not maintain airborne concentrations below recommended exposure

limits (where applicable) or to an acceptable level (in countries where exposure limits have not

been established), an approved respirator must be worn...

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such considerations as washing after handling the material and before eating, drinking, and/or smoking. Routinely

wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid Form Liquid Color Clear Odor Solvent Odor threshold Not available.

Oatey Clear Cleaner SDS US SDS # 1400E Version #: 01 Revision date:

pH Not Applicable
Melting point/freezing point Not available.
Initial boiling point and boiling Not available.
151 °F (66.11 °C)

range

Flash point $0.0 - 4.0 \,^{\circ}\text{F} \, (-18 \, \text{to} \, -15 \,^{\circ}\text{C})$

Evaporation rate 5.5 – 8 Upper/lower flammability or explosive limits

Flammability limit – lower (%) 2.0 Flammability limit – upper (%) 13.0

Explosive limit - lower (%)
Explosive limit - upper (%)
Vapor pressure

Not Available
Not Available
145 mmHq @ 20 C

Vapor density 2.5

Relative density 0.82 +/- 0.02

Solubility(ies)
Solubility (water)
Partition coefficient
Negligible

(n-octanol/water)

Auto-ignition temperature

Decomposition temperature

Viscosity

Not Available

Not Available

>150°C (>302°F)

Not Available

Other information

Bulk Density 6.8 lb/gal

VOC (Weight %) 20g/L SCAQMD 1168/M24

10. Stability and reactivity

Reactivity

The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous

rossibility of flazardou

Conditions to avoid

reaction

No dangerous reaction known under conditions of normal use.

Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the

flash point. Contact with incompatible materials.

Incompatible materials Acids. Strong oxidizing agents. Ammonia. Amines. Isocyanates. Caustics.

Hazardous decomposition

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation May be fatal if swallowed and enters airways. Headache. Nausea, vomiting. May cause irritation

to the respiratory system. Vapors have a narcotic effect and may cause headache, fatigue,

dizziness and nausea. Prolonged inhalation may be harmful.

Skin contact Causes skin irritation.

Eye contact Causes serious eye irritation.

Ingestion May be fatal if swallowed and enters airways. Harmful if swallowed. Harmful if swallowed.

Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a

serious chemical pneumonia.

Symptoms related to the physical, chemical and toxicological characteristics

Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. May

cause respiratory irritation. Skin irritation. May cause redness and pain. Symptoms of

overexposure may be headache, dizziness, tiredness, nausea and vomiting.

Information on likely routes of exposure

Acute Toxicity

Components	Species	Results	
Acetone (CAS 67-64-1)			
Acute			
Dermal			
LD50	Rabbit	20 ml/kg	
Inhalation		1. 11/2	
LC50	Rat	50 mg/l, 8 hours	
Oral			
LD50	Rat	58000 mg/kg	
Ostavi Olsavi Olsavia		CDC LIC	

Oatey Clear Cleaner

SDS # 1400E Version #: 01 Revision date: Issue date: 27-May-2015

Cyclohexanone (108-94-1)

Acute

LD50

Dermal

LD50 Rabbit 948 mg/kg

Inhalation

Rat 8000 ppm, 4 hours

LC50 Oral

Rat 1540 mg/kg

*Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation

Causes skin irritation.

Serious eye damage/eye

Causes serious eye irritation.

irritation

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity

No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity

IARC Mongraphs. Overall Evaluation of Carcingenicity

Cyclohexanone (CAS 108-94-1)

Polyvinyl chloride (CAS 9002-86-2)

3 Not classifiable as to carcinogenicity to humans.
3 Not classifiable as to carcinogenicity to humans.

Silica, amorphous, fumed (CAS 112945-52-5)

3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Polyvinyl chloride (CAS 9002-86-2) Cancer

Reproductive toxicity

This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity

Single exposure Narcotic effects. May cause drowsiness and dizziness. Respiratory tract irritation.

Repeated exposure Not Classified.

Aspiration Hazard May be fatal if swallowed and enters airways.

Chronic effects Prolonged inhalation may be harmful.

Further information None noted.

12. Ecological information

Ecotoxicity The product is not classified as environmentally hazardous. However, this does not

exclude the possibility that large or frequent spills can have a harmful or damaging

effect on the environment.

Components Species Results

Acetone (CAS 67-64-1)

Aquatic

Fish – LC 50 Fathead minnow (Pimephales promelas) >100 mg/l, 96 hours

Cyclohexanone (108-94-1)

Aquatic

Fish – LC 50 Fathead minnow (Pimephales promelas) 481-578 mg/l, 96 hours

Persistence and degradability No data is available on the degradability of this product..

Bio accumulative potential No data is available.

Partition coefficient n-octanol / water (log Kow)
Acetone (CAS 67-64-1) -0.24
Cyclohexanone (CAS 108-94-1) 0.81

Methyl ethyl ketone (CAS 78-93-3) 0.29

Mobility in soil 0.29

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone

creation potential, endocrine disruption, global warming potential) are expected from

this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material

and its container must be disposed of as hazardous waste. Do not allow this material to drain

Oatey Clear Cleaner SDS US SDS # 1400E Version #: 01 Revision date: Issue date: 27-May-2015 Page 6 of 9

into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local, regional, national or

international regulations.

Local disposal regulations

Dispose in accordance with all applicable regulations.

Flammable liquids, n.o.s. (Acetone RQ = 5128 LBS)

Hazardous waste code

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container

14. Transportation information

DOT

UN number UN1993

UN Proper Shipping Name

Transport Hazard class(es)

3 Class Subsidiary risk 3 Label(s) 11

Packing group Special precautions for

user

Read safety instructions, SDS and emergency procedures before handling.

Special provisions IB2, T7, TP1, TP8, TP28

Packaging exceptions 150 Packaging non bulk 202 Packaging bulk 242

IATA

UN number UN1993

UN Proper Shipping Name

Flammable liquid, n.o.s. (Acetone, Cyclohexanone)

Transport hazard class(es)

3 Class Subsidiary risk Packing group 11 **Environmental hazards** No.

Special precautions for

user

ERG Code

Read safety instructions, SDS and emergency procedures before handling.

IMDG

UN number UN1993

UN Proper Shipping Name Flammable liquid, n.o.s. (Acetone, Cyclohexanone)

3H

Transport hazard class(es)

3 Class Subsidiary risk Packing group 11

Environmental hazards

Marine polluntant No. F-E, S-E

Special precautions for

user

Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to. Annex II of MARPOL 73/78 and

Not available.

the IBC Code

Oatey Clear Cleaner SDS # 1400E Version #: 01 Issue date: 27-May-2015 Revision date: Page 7 of 9

15. Regulatory information

U.S. Federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910,1200.

All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not Regulated

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

CERCLA Hazardous Substance List (40 CFR 302.4)

Acetone (CAS 67-64-1) LISTED Cyclohexanone (CAS 108-94-1) LISTED Methyl ethyl ketone (CAS 78-93-3) LISTED

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Immediate Hazard - Yes Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not Listed

SARA 311/312 Hazardous chemical

No

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA)

Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and

Chemical Code Number

Acetone (CAS 67-64-1) 6532 Methyl ethyl ketone (CAS 78-93-3) 6714

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV Methyl ethyl ketone (CAS 78-93-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532 Methyl ethyl ketone (CAS 78-93-3) 6714

US state regulations

US. Massachusetts RTK - Substance List

Acetone (CAS 67-64-1)

Cyclohexanone (CAS 108-94-1) Methyl ethyl ketone (CAS 78-93-3)

US. New Jersey Worker and Community Right-to-Know Act

Acetone (CAS 67-64-1) Cyclohexanone (CAS 108-94-1) Methyl ethyl ketone (CAS 78-93-3)

US. Pennsylvania Worker and Community Right-to-Know Law

Acetone (CAS 67-64-1) Cyclohexanone (CAS 108-94-1)

Methyl ethyl ketone (CAS 78-93-3)

US. Rhode Island RTK

Acetone (CAS 67-64-1) Cyclohexanone (CAS 108-94-1)

Methyl ethyl ketone (CAS 78-93-3)

US. California Proposition 65

Oatey Clear Cleaner SDS US SDS # 1400E Version #: 01 Issue date: 27-May-2015 Revision date:

Page 8 of 9

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

Country(s) or region Inventory name On inventory (yes/no)*

Canada Domestic Substances List (DSL) Yes
United States & Puerto Rico Toxic Substances Control Act (TSCA) Inventory No

*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the

governing country(s).

16. Other information, including date of preparation or last revision

Issue Date 05-27-2015

Revision Date

Version # 01

HMIS Rating Health: 2

Flammability: 3

Physical Hazards: 0

NFPA ratings

230

Disclaimer

HCC Holdings Inc. an Oatey Affiliate cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available.

Oatey Clear Cleaner SDS US



 www.erm.com
 Version: 1.0
 Project No.: 0501429.03
 Client: Fortive
 18 June 2019



Environmental Resources Management 520 Broadhollow Rd, Suite 210 Melville, NY 11747

Project #: Project Name:

0501429 Fortive Corporation Monitoring MacBeth

ERM	Phone: (631) 756-89 Fax: (631) 756-890					Location: Project Manager:	New Windsor, NY Karen Pickering
Sample Location:	Fortive Corporation / Mo	nitoring Former MacI	Beth .			Collector(s):	Daniel D'Arcy
Address:	Former MacBeth , New \	Windsor New York					Mathew Frankel
PID Meter Used: (Model, Serial#)			·	·		Building No:	
(MOUSI, SENAL#) SUMMA Canister Re	ecord:						
SUBSTRUC	TURE SOIL GAS	INDO	OOR AIR (1st Floor)	SUBSTRUC	CTURE SOIL GAS	INDOOR	AIR (1st Floor)
Sample ID:		Sample ID:		Sample ID:		Sample ID:	
SG-a	-031919	AA-3	1-031919	S G1 -	3-031919	AA-3	-031919
Canister Serial No.: Flow Controller Id	A635	Canister Serial No.	A058	Canister Serial No.: Flow Controller Id No:	W 390	Canister Serial No.: Flow Controller Id No:	M004
No:	FC33a	No:	FC 500		FC606	TION CONTROLL IN NO.	MC Ø84
Start Date/Time:	03/19/19	Start Date/Time:	3/19/19	Start Date/Time:	08:30	Start Date/Time:	0835
Start Pressure: (inches Hg)	29	Start Pressure: (inches Hg)	27	Start Pressure: (inches Hg)	29.5	Start Pressure; (inches Hg)	30+(52)
Stop Date/Time:	03/9/19 16:18	Stop Date/Time:	0 <i>3/19/19</i> 16:10	Stop Date/Time:	03/19/19	Stop Date/Time:	03/19/19
Stop Pressure; (inches Hg)	6	Stop Pressure: (inches Hg)	6	Stop Pressure: (inches Hg)	7	Stop Pressure: (inches Hg)	4
Other Sampling Info	rmation:		//-		·	.	1
PID Reading (ppm) Room & as purged		PID Reading (ppm)	0.10-0	PID Reading (ppm) Room & as purged	4.8 800	PID Reading (ppm)	Ø1.
Basement or Crawl Space?	O. 2 ppm	Story/Level	Onlygon	Basement or Crawl Space?	Cacual The	Story/Level	Crand Ehm
Floor Siab Thickness (inches) [if present]	F 001	Room	ORONGET 1007	Floor Slab Thickness (inches) [if present]	Off Boate & Jose	Room	OF TO GOING 1 POZI
Potential Vapor Entry Points Observed?	None	Indoor Air Temp (°F)	64°F	Potential Vapor Entry Points Observed?	See Comments	indoor Air Ternp (°F)	64°F
Ground Surface Condition (Crawl Space Only)		Intake Height Above Floor Level (ft.)	5.0'	Ground Surface Condition (Crawl Space Only)		Intake Height Above Floor Level (fL)	4.5
Noticeable Odor?	N/A	Noticeable Odor?	~/A	Noticeable Odor?	NA	Noticeable Odor?	N/A
Percent O ₂ /CO ₂ /CH ₄	,	Barometric Pressure ("Hg or mb)		Percent O ₂ /CO ₂ /CH ₄	_	Barometric Pressure ("Hg or mb)	
Duplicate Sample?	NO	Duplicate Sample?	NO	Duplicate Sample?	NO	Duplicate Sample?	No
Comments:							
-PID	readings	Fluctual	ed from	0.2 ppm	to 4.7pp	n as	propose
- Poten		or end	rry point	gear SG	/AA-3 10	cotion Expo	sed underblock
tombo	tion wi	All so	door way				
			~				
		1.0					
Signature:	The					4	
originature.							



www.erm.com Version: 1.0 Project No.: 0501429.03 Client: Fortive 18 June 2019



Dayton, NJ 04/15/19

The results set forth herein are provided by SGS North America Inc.

e-Hardcopy 2.0
Automated Report

Technical Report for

ERM, Inc.

Fortive, New Windsor, NY

0501429

SGS Job Number: JC84841

Sampling Date: 03/19/19

Report to:

ERM, Inc.

Mathew.frankel@erm.com

ATTN: Mathew Frankel

Total number of pages in report: 24



Test results contained within this data package meet the requirements of the National Environmental Laboratory Accreditation Program and/or state specific certification programs as applicable.

Brian McGuire General Manager

Client Service contact: Tammy McCloskey 732-329-0200

Certifications: NJ(12129), NY(10983), CA, CT, FL, IL, IN, KS, KY, LA, MA, MD, ME, MN, NC, OH VAP (CL0056), AK (UST-103), AZ (AZ0786), PA, RI, SC, TX, UT, VA, WV, DoD ELAP (ANAB L2248)

This report shall not be reproduced, except in its entirety, without the written approval of SGS. Test results relate only to samples analyzed.

SGS North America Inc. • 2235 Route 130 • Dayton, NJ 08810 • tel: 732-329-0200 • fax: 732-329-3499

SGS

Sections:

Table of Contents

-1-

Section 1: Sample Summary	3
Section 2: Case Narrative/Conformance Summary	4
Section 3: Summary of Hits	5
Section 4: Sample Results	11
4.1: JC84841-1: AA-2-031919	12
4.2: JC84841-2: SG-2-031919	15
4.3: JC84841-3: SG-3-031919	17
4.4: JC84841-4: AA-3-031919	19
Section 5: Misc. Forms	21
5.1: Chain of Custody	22
5.2: Summa Canister and Flow Controller Log	24



Sample Summary

ERM, Inc.

Job No: JC84841

Fortive, New Windsor, NY Project No: 0501429

Sample Number	Collected Date	Time By	Received	Matr Code		Client Sample ID
JC84841-1	03/19/19	16:10 DD	03/20/19	AIR	Indoor Air Comp.	AA-2-031919
JC84841-2	03/19/19	16:18 DD	03/20/19	AIR	Soil Vapor Comp.	SG-2-031919
JC84841-3	03/19/19	16:30 DD	03/20/19	AIR	Soil Vapor Comp.	SG-3-031919
JC84841-4	03/19/19	15:34 DD	03/20/19	AIR	Indoor Air Comp.	AA-3-031919

CASE NARRATIVE / CONFORMANCE SUMMARY

Client: ERM, Inc. Job No JC84841

Site: Fortive, New Windsor, NY Report Date 4/2/2019 5:29:57 PM

On 03/20/2019, 4 Sample(s), 0 Trip Blank(s) and 0 Field Blank(s) were received at SGS North America Inc. A SGS North America Inc. Job Number of JC84841 was assigned to the project. Laboratory sample ID, client sample ID and dates of sample collection are detailed in the report's Results Summary Section.

Specified quality control criteria were achieved for this job except as noted below. For more information, please refer to the analytical results and QC summary pages.

Compounds qualified as out of range in the continuing calibration summary report are acceptable as per method requirements when there is a high bias but the sample result is non-detect.

MS Volatiles By Method TO-15

Matrix: AIR Batch ID: V5W1459

- All samples were analyzed within the recommended method holding time.
- Sample(s) JC83944-1RDUP were used as the QC samples indicated.
- All method blanks for this batch meet method specific criteria.
- V5W1459-BS for Vinyl chloride: High percent recoveries and no associated positive reported in the QC batch.
- JC84841-1 for Methyl Isobutyl Ketone: Associated CCV outside of control limits high.

Matrix: AIR Batch ID: V5W1460

- All samples were analyzed within the recommended method holding time.
- Sample(s) JC84960-1DUP were used as the QC samples indicated.
- All method blanks for this batch meet method specific criteria.
- Sample(s) JC84841-1 have compounds reported with "E" qualifiers indicating estimated value exceeding calibration range.

Matrix: AIR Batch ID: V5W1462

- All samples were analyzed within the recommended method holding time.
- Sample(s) JC85185-6DUP were used as the QC samples indicated.
- All method blanks for this batch meet method specific criteria.
- Sample(s) JC84841-4 have compounds reported with "E" qualifiers indicating estimated value exceeding calibration range.
- V5W1462-BS for Freon 114: High percent recoveries and no associated positive reported in the QC batch.
- V5W1462-BS for Vinyl chloride: High percent recoveries and no associated positive reported in the QC batch.

SGS North America Inc. certifies that data reported for samples received, listed on the associated custody chain or analytical task order, were produced to specifications meeting the Quality System precision, accuracy and completeness objectives except as noted.

Estimated non-standard method measurement uncertainty data is available on request, based on quality control bias and implicit for standard methods. Acceptable uncertainty requires tested parameter quality control data to meet method criteria.

SGS North America Inc. is not responsible for data quality assumptions if partial reports are used and recommends that this report be used in its entirety. Data release is authorized by SGS North America Inc indicated via signature on the report cover

Tuesday, April 02, 2019

Page 1 of 1

Account: ERM, Inc.

Project: Fortive, New Windsor, NY

Lab Sample ID Client Sample ID Analyte	Result/ Qual	RL	MDL	Units	Method
-					
JC84841-1 AA-2-031919					
Acetone	22.9	0.16	0.090	ppbv	TO-15
Benzene	0.94	0.16	0.0095	ppbv	TO-15
Carbon disulfide	0.12 J	0.16	0.019	ppbv	TO-15
Chloromethane	0.69	0.16	0.012	ppbv	TO-15
Carbon tetrachloride	0.082	0.032	0.019	ppbv	TO-15
Cyclohexane	0.48	0.16	0.018	ppbv	TO-15
1,2-Dichloroethane	0.18	0.16	0.017	ppbv	TO-15
Dichlorodifluoromethane	0.55	0.16	0.013	ppbv	TO-15
Ethanol	226 E	2.0	0.87	ppbv	TO-15
Ethylbenzene	6.0	0.16	0.012	ppbv	TO-15
Ethyl Acetate	4.9	0.16	0.030	ppbv	TO-15
4-Ethyltoluene	0.32	0.16	0.024	ppbv	TO-15
Freon 113	0.082	0.080	0.014	ppbv	TO-15
Heptane	4.3	0.16	0.014	ppbv	TO-15
Hexane	1.2	0.16	0.0085	ppbv	TO-15
2-Hexanone	1.4	0.16	0.029	ppbv	TO-15
Isopropyl Alcohol	7.4	0.16	0.052	ppbv	TO-15
Methylene chloride	0.43	0.16	0.012	ppbv	TO-15
Methyl ethyl ketone	5.1	0.16	0.034	ppbv	TO-15
Methyl Isobutyl Ketone ^a	5.1	0.16	0.029	ppbv	TO-15
Methyl Tert Butyl Ether	0.24	0.16	0.015	ppbv	TO-15
Methylmethacrylate	0.63	0.16	0.026	ppbv	TO-15
Styrene	9.0	0.16	0.015	ppbv	TO-15
1,2,4-Trimethylbenzene	0.61	0.16	0.026	ppbv	TO-15
1,3,5-Trimethylbenzene	0.19	0.16	0.027	ppbv	TO-15
2,2,4-Trimethylpentane	0.99	0.16	0.017	ppbv	TO-15
Tertiary Butyl Alcohol	12.2	0.16	0.011	ppbv	TO-15
Tetrachloroethylene	0.67	0.032	0.025	ppbv	TO-15
Tetrahydrofuran	0.55	0.16	0.040	ppbv	TO-15
Toluene	34.9	0.80	0.058	ppbv	TO-15
Trichloroethylene	0.10	0.032	0.015	ppbv	TO-15
Trichlorofluoromethane	2.9	0.080	0.022	ppbv	TO-15
m,p-Xylene	21.5	0.16	0.027	ppbv	TO-15
o-Xylene	11.9	0.16	0.014	ppbv	TO-15
Xylenes (total)	33.4	0.16	0.014	ppbv	TO-15
Acetone	54.4	0.38	0.21	ug/m3	TO-15
Benzene	3.0	0.51	0.030	ug/m3	TO-15
Carbon disulfide	0.37 J	0.50	0.059	ug/m3	TO-15
Chloromethane	1.4	0.33	0.025	ug/m3	TO-15
Carbon tetrachloride	0.52	0.20	0.12	ug/m3	TO-15
Cyclohexane	1.7	0.55	0.062	ug/m3	TO-15
1,2-Dichloroethane	0.73	0.65	0.069	ug/m3	TO-15
Dichlorodifluoromethane	2.7	0.79	0.064	ug/m3	TO-15
2 Italioi odilidoi olilettidile	,	0.77	0.001	wg/1113	10 10

Account: ERM, Inc.

Project: Fortive, New Windsor, NY

Lab Sample ID Client Sample		RL	MDL	Units	Method	
Analyte	Qual	KL	MIDL	Units	Method	
Ethanol	426 E	3.8	1.6	ug/m3	TO-15	
Ethylbenzene	26	0.69	0.052	ug/m3	TO-15	
Ethyl Acetate	18	0.58	0.11	ug/m3	TO-15	
4-Ethyltoluene	1.6	0.79	0.12	ug/m3	TO-15	
Freon 113	0.63	0.61	0.11	ug/m3	TO-15	
Heptane	18	0.66	0.057	ug/m3	TO-15	
Hexane	4.2	0.56	0.030	ug/m3	TO-15	
2-Hexanone	5.7	0.65	0.12	ug/m3	TO-15	
sopropyl Alcohol	18	0.39	0.13	ug/m3	TO-15	
Methylene chloride	1.5	0.56	0.042	ug/m3	TO-15	
Methyl ethyl ketone	15	0.47	0.10	ug/m3	TO-15	
Methyl Isobutyl Ketone ^a	21	0.66	0.12	ug/m3	TO-15	
Methyl Tert Butyl Ether	0.87	0.58	0.054	ug/m3	TO-15	
Methylmethacrylate	2.6	0.66	0.11	ug/m3	TO-15	
Styrene	38	0.68	0.064	ug/m3	TO-15	
1,2,4-Trimethylbenzene	3.0	0.79	0.13	ug/m3	TO-15	
1,3,5-Trimethylbenzene	0.93	0.79	0.13	ug/m3	TO-15	
2,2,4-Trimethylpentane	4.6	0.75	0.079	ug/m3	TO-15	
Tertiary Butyl Alcohol	37.0	0.49	0.033	ug/m3	TO-15	
Tetrachloroethylene	4.5	0.22	0.17	ug/m3	TO-15	
Fetrahydrofuran	1.6	0.47	0.12	ug/m3	TO-15	
Γoluene	132	3.0	0.22	ug/m3	TO-15	
Γrichloroethylene	0.54	0.17	0.081	ug/m3	TO-15	
Frichlorofluoromethane	16	0.45	0.12	ug/m3	TO-15	
m,p-Xylene	93.4	0.69	0.12	ug/m3	TO-15	
o-Xylene	51.7	0.69	0.061	ug/m3	TO-15	
Xylenes (total)	145	0.69	0.061	ug/m3	TO-15	
JC84841-2 SG-2-031919						
Acetone	8.8	0.80	0.45	ppbv	TO-15	
Benzene	0.54 J	0.80	0.048	ppbv	TO-15	
Dichlorodifluoromethane	1.3	0.80	0.066	ppbv	TO-15	
Ethanol	27.4	2.0	0.87	ppbv	TO-15	
Ethylbenzene	2.9	0.80	0.060	ppbv	TO-15	
Ethyl Acetate	0.51 J	0.80	0.15	ppbv	TO-15	
Freon 113	57.7	0.40	0.068	ppbv	TO-15	
Heptane	1.2	0.80	0.070	ppbv	TO-15	
Hexane	0.58 J	0.80	0.042	ppbv	TO-15	
Isopropyl Alcohol	4.8	0.80	0.26	ppbv	TO-15	
Methyl ethyl ketone	3.6	0.80	0.17	ppbv	TO-15	
Styrene	3.3	0.80	0.076	ppbv	TO-15	
1,1,1-Trichloroethane	31.8	0.40	0.13	ppbv	TO-15	
1,2,4-Trimethylbenzene	0.46 J	0.80	0.13	ppbv	TO-15	
-,-,	0.51 J	0.80	0.10	ppbv	TO-15	

Account: JC84841 ERM, Inc.

Project: Fortive, New Windsor, NY

Lab Sample ID Client Sample ID Analyte	Result/ Qual	RL	MDL	Units	Method
Tertiary Rutyl Alcohol	1.5	0.80	0.055	ppbv	TO-15
Tertiary Butyl Alcohol Tetrachloroethylene	0.37	0.80	0.033	ppov ppbv	TO-15
Toluene	17.6	0.10	0.12		TO-15
				ppbv	
Trichloroethylene	0.73 3.3	0.16	0.076	ppbv	TO-15
Trichlorofluoromethane		0.40	0.11	ppbv	TO-15
m,p-Xylene	9.9	0.80	0.14	ppbv	TO-15
o-Xylene	5.6	0.80	0.068	ppbv	TO-15
Xylenes (total)	15.5	0.80	0.068	ppbv	TO-15
Acetone	21	1.9	1.1	ug/m3	TO-15
Benzene	1.7 J	2.6	0.15	ug/m3	TO-15
Dichlorodifluoromethane	6.4	4.0	0.33	ug/m3	TO-15
Ethanol	51.6	3.8	1.6	ug/m3	TO-15
Ethylbenzene	13	3.5	0.26	ug/m3	TO-15
Ethyl Acetate	1.8 J	2.9	0.54	ug/m3	TO-15
Freon 113	442	3.1	0.52	ug/m3	TO-15
Heptane	4.9	3.3	0.29	ug/m3	TO-15
Hexane	2.0 J	2.8	0.15	ug/m3	TO-15
Isopropyl Alcohol	12	2.0	0.64	ug/m3	TO-15
Methyl ethyl ketone	11	2.4	0.50	ug/m3	TO-15
Styrene	14	3.4	0.32	ug/m3	TO-15
1,1,1-Trichloroethane	174	2.2	0.71	ug/m3	TO-15
1,2,4-Trimethylbenzene	2.3 J	3.9	0.64	ug/m3	TO-15
2,2,4-Trimethylpentane	2.4 J	3.7	0.41	ug/m3	TO-15
Tertiary Butyl Alcohol	4.5	2.4	0.17	ug/m3	TO-15
Tetrachloroethylene	2.5	1.1	0.81	ug/m3	TO-15
Toluene	66.3	3.0	0.22	ug/m3	TO-15
Trichloroethylene	3.9	0.86	0.41	ug/m3	TO-15
Trichlorofluoromethane	19	2.2	0.62	ug/m3	TO-15
m,p-Xylene	43	3.5	0.61	ug/m3	TO-15
o-Xylene	24	3.5	0.30	ug/m3	TO-15
Xylenes (total)	67.3	3.5	0.30	ug/m3	TO-15
JC84841-3 SG-3-031919					
Acetone	6.7	0.80	0.45	ppbv	TO-15
Dichlorodifluoromethane	5.7	0.80	0.066	ppbv	TO-15
Ethanol	14.0	2.0	0.87	ppbv	TO-15
Ethylbenzene	4.5	0.80	0.060	ppbv	TO-15
Freon 113	3.7	0.40	0.068	ppbv	TO-15
Heptane	1.0	0.80	0.070	ppbv	TO-15
Hexane	0.50 J	0.80	0.042	ppbv	TO-15
Isopropyl Alcohol	4.4	0.80	0.26	ppbv	TO-15
Methyl ethyl ketone	3.4	0.80	0.20	ppbv	TO-15
* *	6.6	0.80	0.17	ppbv ppbv	TO-15
Styrene 1,1,1-Trichloroethane	8.5				
1, 1, 1-111CHIOLOGHIANE	0.3	0.40	0.13	ppbv	TO-15

Account: JC84841 ERM, Inc.

Project: Fortive, New Windsor, NY

Lab Sample ID Client Sample ID Analyte	Result/ Qual	RL	MDL	Units	Method
1,2,4-Trimethylbenzene	0.56 J	0.80	0.13	ppbv	TO-15
2,2,4-Trimethylpentane	0.40 J	0.80	0.087	ppbv	TO-15
Tertiary Butyl Alcohol	2.5	0.80	0.055	ppbv	TO-15
Tetrachloroethylene	21.6	0.16	0.12	ppbv	TO-15
Toluene	19.9	0.80	0.058	ppbv	TO-15
Trichlorofluoromethane	2.9	0.40	0.11	ppbv	TO-15
m,p-Xylene	16.3	0.80	0.14	ppbv	TO-15
o-Xylene	9.6	0.80	0.068	ppbv	TO-15
Xylenes (total)	25.8	0.80	0.068	ppbv	TO-15
Acetone	16	1.9	1.1	ug/m3	TO-15
Dichlorodifluoromethane	28	4.0	0.33	ug/m3	TO-15
Ethanol	26.4	3.8	1.6	ug/m3	TO-15
Ethylbenzene	20	3.5	0.26	ug/m3	TO-15
Freon 113	28	3.1	0.52	ug/m3	TO-15
Heptane	4.1	3.3	0.29	ug/m3	TO-15
Hexane	1.8 J	2.8	0.15	ug/m3	TO-15
Isopropyl Alcohol	11	2.0	0.64	ug/m3	TO-15
Methyl ethyl ketone	10	2.4	0.50	ug/m3	TO-15
Styrene	28	3.4	0.32	ug/m3	TO-15
1,1,1-Trichloroethane	46	2.2	0.71	ug/m3	TO-15
1,2,4-Trimethylbenzene	2.8 J	3.9	0.71	ug/m3	TO-15
2,2,4-Trimethylpentane	1.9 J	3.7	0.41	ug/m3	TO-15
Tertiary Butyl Alcohol	7.6	2.4	0.41	ug/m3	TO-15
Tetrachloroethylene	146	1.1	0.17	ug/m3	TO-15
Toluene	75.0	3.0	0.31	ug/m3	TO-15
Tottene Trichlorofluoromethane	16	2.2	0.62	ug/m3	TO-15
	70.8	3.5	0.62	-	TO-15
m,p-Xylene				ug/m3	
o-Xylene	42	3.5	0.30	ug/m3	TO-15
Xylenes (total)	112	3.5	0.30	ug/m3	TO-15
JC84841-4 AA-3-031919					
Acetone	10.1	0.16	0.090	ppbv	TO-15
Benzene	0.50	0.16	0.0095	ppbv	TO-15
Chloromethane	0.58	0.16	0.012	ppbv	TO-15
Carbon tetrachloride	0.078	0.032	0.019	ppbv	TO-15
Cyclohexane	0.28	0.16	0.018	ppbv	TO-15
1,2-Dichloroethane	0.11 J	0.16	0.017	ppbv	TO-15
Dichlorodifluoromethane	0.51	0.16	0.013	ppbv	TO-15
cis-1,2-Dichloroethylene	0.72	0.032	0.0094	ppbv	TO-15
Ethanol	79.8 E	0.40	0.17	ppbv	TO-15
Ethylbenzene	2.7	0.16	0.012	ppbv	TO-15
Ethyl Acetate	1.5	0.16	0.030	ppbv	TO-15
4-Ethyltoluene	0.13 J	0.16	0.024	ppbv	TO-15
Heptane	1.9	0.16	0.024	ppbv	TO-15
Heptane	1.9	0.10	0.014	ppov	10-13

Job Number: JC84841 Account: ERM, Inc.

Project: Fortive, New Windsor, NY

Lab Sample ID Client Sample ID Analyte	Result/ Qual	RL	MDL	Units	Method
Hexane	1.0	0.16	0.0085	ppbv	TO-15
2-Hexanone	0.68	0.16	0.029	ppbv	TO-15
Isopropyl Alcohol	4.0	0.16	0.052	ppbv	TO-15
Methylene chloride	1.8	0.16	0.012	ppbv	TO-15
Methyl ethyl ketone	2.9	0.16	0.034	ppbv	TO-15
Methyl Isobutyl Ketone	1.1	0.16	0.029	ppbv	TO-15
Methyl Tert Butyl Ether	0.11 J	0.16	0.015	ppbv	TO-15
Styrene	3.2	0.16	0.015	ppbv	TO-15
1,2,4-Trimethylbenzene	0.28	0.16	0.026	ppbv	TO-15
1,3,5-Trimethylbenzene	0.10 J	0.16	0.027	ppbv	TO-15
2,2,4-Trimethylpentane	0.57	0.16	0.017	ppbv	TO-15
Tertiary Butyl Alcohol	5.8	0.16	0.011	ppbv	TO-15
Tetrachloroethylene	0.58	0.032	0.025	ppbv	TO-15
Tetrahydrofuran	0.20	0.16	0.040	ppbv	TO-15
Toluene	19.3	0.16	0.012	ppbv	TO-15
Trichloroethylene	0.18	0.032	0.015	ppbv	TO-15
Trichlorofluoromethane	0.75	0.080	0.022	ppbv	TO-15
m,p-Xylene	9.0	0.16	0.027	ppbv	TO-15
o-Xylene	5.2	0.16	0.014	ppbv	TO-15
Xylenes (total)	14.1	0.16	0.014	ppbv	TO-15
Acetone	24.0	0.38	0.21	ug/m3	TO-15
Benzene	1.6	0.51	0.030	ug/m3	TO-15
Chloromethane	1.2	0.33	0.025	ug/m3	TO-15
Carbon tetrachloride	0.49	0.20	0.12	ug/m3	TO-15
Cyclohexane	0.96	0.55	0.062	ug/m3	TO-15
1,2-Dichloroethane	0.45 J	0.65	0.069	ug/m3	TO-15
Dichlorodifluoromethane	2.5	0.79	0.064	ug/m3	TO-15
cis-1,2-Dichloroethylene	2.9	0.13	0.037	ug/m3	TO-15
Ethanol	150 E	0.75	0.32	ug/m3	TO-15
Ethylbenzene	12	0.69	0.052	ug/m3	TO-15
Ethyl Acetate	5.4	0.58	0.11	ug/m3	TO-15
4-Ethyltoluene	0.64 J	0.79	0.12	ug/m3	TO-15
Heptane	7.8	0.75	0.057	ug/m3	TO-15
Hexane	3.5	0.56	0.037	ug/m3	TO-15
2-Hexanone	2.8	0.65	0.030	ug/m3	TO-15
	9.8	0.03	0.12	ug/m3	TO-15
Isopropyl Alcohol Methylene chloride	6.3	0.56	0.13		TO-15
Methyl ethyl ketone	8.6	0.30	0.042	ug/m3	
Methyl Isobutyl Ketone	4.5	0.47	0.10	ug/m3	TO-15 TO-15
Methyl Tert Butyl Ether	4.3 0.40 J	0.66		ug/m3	
			0.054	ug/m3	TO-15
Styrene	14	0.68	0.064	ug/m3	TO-15
1,2,4-Trimethylbenzene	1.4	0.79	0.13	ug/m3	TO-15
1,3,5-Trimethylbenzene	0.49 J	0.79	0.13	ug/m3	TO-15
2,2,4-Trimethylpentane	2.7	0.75	0.079	ug/m3	TO-15
Tertiary Butyl Alcohol	18	0.49	0.033	ug/m3	TO-15

Job Number: JC84841 **Account:** ERM, Inc.

Project: Fortive, New Windsor, NY

Lab Sample ID Client Sample ID Analyte	Result/ Qual	RL	MDL	Units	Method
Tetrachloroethylene	3.9	0.22	0.17	ug/m3	TO-15
Tetrahydrofuran	0.59	0.47	0.12	ug/m3	TO-15
Toluene	72.7	0.60	0.045	ug/m3	TO-15
Trichloroethylene	0.97	0.17	0.081	ug/m3	TO-15
Trichlorofluoromethane	4.2	0.45	0.12	ug/m3	TO-15
m,p-Xylene	39	0.69	0.12	ug/m3	TO-15
o-Xylene	23	0.69	0.061	ug/m3	TO-15
Xylenes (total)	61.2	0.69	0.061	ug/m3	TO-15

⁽a) Associated CCV outside of control limits high.



Dayton, NJ

Section 4

Sample Results		
Report of Analysis		

Page 1 of 3

Report of Analysis

Client Sample ID: AA-2-031919 Lab Sample ID:

JC84841-1 **Date Sampled:** 03/19/19 Matrix: **Date Received:** 03/20/19 AIR - Indoor Air Comp. Summa ID: A058 Percent Solids: n/a

Method: TO-15

Fortive, New Windsor, NY Project:

	File ID	DF	Analyzed	By	Prep Date	Prep Batch	Analytical Batch
Run #1	5W35772.D	1	03/27/19 01:14	GP	n/a	n/a	V5W1459
Run #2	5W35787.D	1	03/27/19 17:10	GP	n/a	n/a	V5W1460

	Initial Volume
Run #1	500 ml
Run #2	100 ml

VOA TO15 List

CAS No.	MW	Compound	Result	RL	MDL	Units	Q	Result	RL	MDL	Units
67-64-1	58.08	Acetone	22.9	0.16	0.090	ppbv		54.4	0.38	0.21	ug/m3
106-99-0	54.09	1,3-Butadiene	ND	0.16	0.037			ND	0.35	0.082	ug/m3
71-43-2	78.11	Benzene	0.94	0.16	0.0095			3.0	0.51	0.030	ug/m3
75-27-4	163.8	Bromodichloromethane	ND	0.080	0.021	ppbv		ND	0.54	0.14	ug/m3
75-25-2	252.8	Bromoform	ND	0.032	0.030	ppbv		ND	0.33	0.31	ug/m3
74-83-9	94.94	Bromomethane	ND	0.16	0.018			ND	0.62	0.070	ug/m3
593-60-2	106.9	Bromoethene	ND	0.16	0.018	ppbv		ND	0.70	0.079	ug/m3
100-44-7	126	Benzyl Chloride	ND	0.16	0.045			ND	0.82	0.23	ug/m3
75-15-0	76.14	Carbon disulfide	0.12	0.16	0.019	ppbv	J	0.37	0.50	0.059	ug/m3
108-90-7	112.6	Chlorobenzene	ND	0.16	0.021	ppbv		ND	0.74	0.097	ug/m3
75-00-3	64.52	Chloroethane	ND	0.16	0.039	ppbv		ND	0.42	0.10	ug/m3
67-66-3	119.4	Chloroform	ND	0.16	0.016	ppbv		ND	0.78	0.078	ug/m3
74-87-3	50.49	Chloromethane	0.69	0.16	0.012	ppbv		1.4	0.33	0.025	ug/m3
107-05-1	76.53	3-Chloropropene	ND	0.16	0.032	ppbv		ND	0.50	0.10	ug/m3
95-49-8	126.6	2-Chlorotoluene	ND	0.16	0.020	ppbv		ND	0.83	0.10	ug/m3
56-23-5	153.8	Carbon tetrachloride	0.082	0.032	0.019	ppbv		0.52	0.20	0.12	ug/m3
110-82-7	84.16	Cyclohexane	0.48	0.16	0.018			1.7	0.55	0.062	ug/m3
75-34-3	98.96	1,1-Dichloroethane	ND	0.16	0.0093	3 ppbv		ND	0.65	0.038	ug/m3
75-35-4	96.94	1,1-Dichloroethylene	ND	0.032	0.013			ND	0.13	0.052	ug/m3
106-93-4	187.9	1,2-Dibromoethane	ND	0.080	0.014	ppbv		ND	0.61	0.11	ug/m3
107-06-2	98.96	1,2-Dichloroethane	0.18	0.16	0.017	ppbv		0.73	0.65	0.069	ug/m3
78-87-5	113	1,2-Dichloropropane	ND	0.16	0.015			ND	0.74	0.069	ug/m3
123-91-1	88.12	1,4-Dioxane	ND	0.16	0.042	ppbv		ND	0.58	0.15	ug/m3
75-71-8	120.9	Dichlorodifluoromethane	0.55	0.16	0.013	ppbv		2.7	0.79	0.064	ug/m3
124-48-1	208.3	Dibromochloromethane	ND	0.080	0.027			ND	0.68	0.23	ug/m3
156-60-5	96.94	trans-1,2-Dichloroethylene	ND	0.16	0.0058	3 ppbv		ND	0.63	0.023	ug/m3
156-59-2	96.94	cis-1,2-Dichloroethylene	ND	0.032	0.0094	l ppbv		ND	0.13	0.037	ug/m3
10061-01-5	111	cis-1,3-Dichloropropene	ND	0.16	0.016	ppbv		ND	0.73	0.073	ug/m3
541-73-1	147	m-Dichlorobenzene	ND	0.080	0.015	ppbv		ND	0.48	0.090	ug/m3
95-50-1	147	o-Dichlorobenzene	ND	0.032	0.017			ND	0.19	0.10	ug/m3
106-46-7	147	p-Dichlorobenzene	ND	0.080	0.014	ppbv		ND	0.48	0.084	ug/m3
10061-02-6	111	trans-1,3-Dichloropropene	ND	0.16	0.016	ppbv		ND	0.73	0.073	ug/m3

ND = Not detected MDL = Method Detection Limit

RL = Reporting Limit

E = Indicates value exceeds calibration range

J = Indicates an estimated value

B = Indicates analyte found in associated method blank

Report of Analysis

Client Sample ID: AA-2-031919

Lab Sample ID: JC84841-1 **Date Sampled:** 03/19/19 Matrix: **Date Received:** 03/20/19 AIR - Indoor Air Comp. Summa ID: A058 Percent Solids: n/a

Method: TO-15

Project: Fortive, New Windsor, NY

VOA TO15 List

CAS No.	MW	Compound	Result	RL	MDL	Units	Q	Result	RL	MDL	Units
64-17-5	46.07	Ethanol	226 a	2.0	0.87	ppbv	Е	426 a	3.8	1.6	ug/m3
100-41-4	106.2	Ethylbenzene	6.0	0.16	0.012			26	0.69	0.052	ug/m3
141-78-6	88	Ethyl Acetate	4.9	0.16	0.030			18	0.58	0.11	ug/m3
622-96-8	120.2	4-Ethyltoluene	0.32	0.16	0.024			1.6	0.79	0.12	ug/m3
76-13-1	187.4	Freon 113	0.082	0.080				0.63	0.61	0.11	ug/m3
76-14-2	170.9	Freon 114	ND	0.080				ND	0.56	0.10	ug/m3
142-82-5	100.2	Heptane	4.3	0.16	0.014			18	0.66	0.057	ug/m3
87-68-3	260.8	Hexachlorobutadiene	ND	0.072				ND	0.77	0.38	ug/m3
110-54-3	86.17	Hexane	1.2	0.16	0.0083			4.2	0.56	0.030	ug/m3
591-78-6	100	2-Hexanone	1.4	0.16	0.029			5.7	0.65	0.12	ug/m3
67-63-0	60.1	Isopropyl Alcohol	7.4	0.16	0.052	ppbv		18	0.39	0.13	ug/m3
75-09-2	84.94	Methylene chloride	0.43	0.16	0.012	ppbv		1.5	0.56	0.042	ug/m3
78-93-3	72.11	Methyl ethyl ketone	5.1	0.16	0.034	ppbv		15	0.47	0.10	ug/m3
108-10-1	100.2	Methyl Isobutyl Ketone b	5.1	0.16	0.029	ppbv		21	0.66	0.12	ug/m3
1634-04-4	88.15	Methyl Tert Butyl Ether	0.24	0.16	0.015	ppbv		0.87	0.58	0.054	ug/m3
80-62-6	100.12	Methylmethacrylate	0.63	0.16	0.026	ppbv		2.6	0.66	0.11	ug/m3
115-07-1	42	Propylene	ND	0.40	0.013	ppbv		ND	0.69	0.022	ug/m3
100-42-5	104.1	Styrene	9.0	0.16	0.015	ppbv		38	0.68	0.064	ug/m3
71-55-6	133.4	1,1,1-Trichloroethane	ND	0.080	0.027	ppbv		ND	0.44	0.15	ug/m3
79-34-5	167.9	1,1,2,2-Tetrachloroethane	ND	0.080	0.022	ppbv		ND	0.55	0.15	ug/m3
79-00-5	133.4	1,1,2-Trichloroethane	ND	0.080				ND	0.44	0.13	ug/m3
120-82-1	181.5	1,2,4-Trichlorobenzene	ND	0.080	0.071	ppbv		ND	0.59	0.53	ug/m3
95-63-6	120.2	1,2,4-Trimethylbenzene	0.61	0.16	0.026	ppbv		3.0	0.79	0.13	ug/m3
108-67-8	120.2	1,3,5-Trimethylbenzene	0.19	0.16	0.027	ppbv		0.93	0.79	0.13	ug/m3
540-84-1	114.2	2,2,4-Trimethylpentane	0.99	0.16	0.017	ppbv		4.6	0.75	0.079	ug/m3
75-65-0	74.12	Tertiary Butyl Alcohol	12.2	0.16	0.011	ppbv		37.0	0.49	0.033	ug/m3
127-18-4	165.8	Tetrachloroethylene	0.67	0.032	0.025	ppbv		4.5	0.22	0.17	ug/m3
109-99-9	72.11	Tetrahydrofuran	0.55	0.16	0.040	ppbv		1.6	0.47	0.12	ug/m3
108-88-3	92.14	Toluene	34.9 a	0.80	0.058	ppbv		132 a	3.0	0.22	ug/m3
79-01-6	131.4	Trichloroethylene	0.10		0.015	ppbv		0.54	0.17	0.081	ug/m3
75-69-4	137.4	Trichlorofluoromethane	2.9					16	0.45	0.12	ug/m3
75-01-4	62.5	Vinyl chloride	ND	0.032	0.018	ppbv		ND	0.082	0.046	ug/m3
108-05-4	86	Vinyl Acetate	ND	0.16	0.027	ppbv		ND	0.56	0.095	ug/m3
	106.2	m,p-Xylene	21.5	0.16	0.027	ppbv		93.4	0.69	0.12	ug/m3
95-47-6	106.2	o-Xylene	11.9	0.16	0.014	ppbv		51.7	0.69	0.061	ug/m3
1330-20-7	106.2	Xylenes (total)	33.4	0.16	0.014	ppbv		145	0.69	0.061	ug/m3

CAS No. **Surrogate Recoveries** Run#1 Run# 2 Limits

460-00-4 4-Bromofluorobenzene 88% 103% 65-128%

ND = Not detected MDL = Method Detection Limit

RL = Reporting Limit

E = Indicates value exceeds calibration range

J = Indicates an estimated value

B = Indicates analyte found in associated method blank

Report of Analysis

Page 3 of 3

Client Sample ID: AA-2-031919

Lab Sample ID: JC84841-1 **Date Sampled:** 03/19/19 Matrix: AIR - Indoor Air Comp. Summa ID: A058 **Date Received:** 03/20/19 n/a

Method: TO-15 **Percent Solids:**

Project: Fortive, New Windsor, NY

VOA TO15 List

CAS No. MWCompound Result RLMDL Units Q Result RL**MDL** Units

(a) Result is from Run# 2

(b) Associated CCV outside of control limits high.

ND = Not detected

MDL = Method Detection Limit

RL = Reporting Limit

E = Indicates value exceeds calibration range

J = Indicates an estimated value

B = Indicates analyte found in associated method blank N = Indicates presumptive evidence of a compound





Page 1 of 2

Report of Analysis

Client Sample ID: SG-2-031919

Lab Sample ID:JC84841-2Date Sampled:03/19/19Matrix:AIR - Soil Vapor Comp.Summa ID: A635Date Received:03/20/19Method:TO-15Percent Solids:n/a

Project: Fortive, New Windsor, NY

 File ID
 DF
 Analyzed
 By
 Prep Date
 Prep Batch
 Analytical Batch

 Run #1
 5W35790.D
 1
 03/27/19 19:27 GP
 n/a
 n/a
 V5W1460

Run #2

Initial Volume

Run #1 100 ml

Run #2

VOA TO15 List

CAS No.	MW	Compound	Result	RL	MDL	Units	Q	Result	RL	MDL	Units
67-64-1	58.08	Acetone	8.8	0.80	0.45	ppbv		21	1.9	1.1	ug/m3
106-99-0	54.09	1,3-Butadiene	ND	0.80	0.18	ppbv		ND	1.8	0.40	ug/m3
71-43-2	78.11	Benzene	0.54	0.80	0.048	ppbv	J	1.7	2.6	0.15	ug/m3
75-27-4	163.8	Bromodichloromethane	ND	0.40	0.11	ppbv		ND	2.7	0.74	ug/m3
75-25-2	252.8	Bromoform	ND	0.16	0.15	ppbv		ND	1.7	1.6	ug/m3
74-83-9	94.94	Bromomethane	ND	0.80	0.088	ppbv		ND	3.1	0.34	ug/m3
593-60-2	106.9	Bromoethene	ND	0.80	0.088	ppbv		ND	3.5	0.38	ug/m3
100-44-7	126	Benzyl Chloride	ND	0.80	0.23	ppbv		ND	4.1	1.2	ug/m3
75-15-0	76.14	Carbon disulfide	ND	0.80	0.094	ppbv		ND	2.5	0.29	ug/m3
108-90-7	112.6	Chlorobenzene	ND	0.80	0.10	ppbv		ND	3.7	0.46	ug/m3
75-00-3	64.52	Chloroethane	ND	0.80	0.19	ppbv		ND	2.1	0.50	ug/m3
67-66-3	119.4	Chloroform	ND	0.80	0.080	ppbv		ND	3.9	0.39	ug/m3
74-87-3	50.49	Chloromethane	ND	0.80	0.061	ppbv		ND	1.7	0.13	ug/m3
107-05-1	76.53	3-Chloropropene	ND	0.80	0.16	ppbv		ND	2.5	0.50	ug/m3
95-49-8	126.6	2-Chlorotoluene	ND	0.80	0.10	ppbv		ND	4.1	0.52	ug/m3
56-23-5	153.8	Carbon tetrachloride	ND	0.16	0.094	ppbv		ND	1.0	0.59	ug/m3
110-82-7	84.16	Cyclohexane	ND	0.80	0.088	ppbv		ND	2.8	0.30	ug/m3
75-34-3	98.96	1,1-Dichloroethane	ND	0.80	0.046	ppbv		ND	3.2	0.19	ug/m3
75-35-4	96.94	1,1-Dichloroethylene	ND	0.16	0.067	ppbv		ND	0.63	0.27	ug/m3
106-93-4	187.9	1,2-Dibromoethane	ND	0.40	0.071	ppbv		ND	3.1	0.55	ug/m3
107-06-2	98.96	1,2-Dichloroethane	ND	0.80	0.083	ppbv		ND	3.2	0.34	ug/m3
78-87-5	113	1,2-Dichloropropane	ND	0.80	0.077	ppbv		ND	3.7	0.36	ug/m3
123-91-1	88.12	1,4-Dioxane	ND	0.80	0.21	ppbv		ND	2.9	0.76	ug/m3
75-71-8	120.9	Dichlorodifluoromethane	1.3	0.80	0.066	ppbv		6.4	4.0	0.33	ug/m3
124-48-1	208.3	Dibromochloromethane	ND	0.40	0.13	ppbv		ND	3.4	1.1	ug/m3
156-60-5	96.94	trans-1,2-Dichloroethylene	ND	0.80	0.029	ppbv		ND	3.2	0.11	ug/m3
156-59-2	96.94	cis-1,2-Dichloroethylene	ND	0.16	0.047	ppbv		ND	0.63	0.19	ug/m3
10061-01-5	111	cis-1,3-Dichloropropene	ND	0.80	0.078	ppbv		ND	3.6	0.35	ug/m3
541-73-1	147	m-Dichlorobenzene	ND	0.40	0.076	ppbv		ND	2.4	0.46	ug/m3
95-50-1	147	o-Dichlorobenzene	ND	0.16	0.087	ppbv		ND	0.96	0.52	ug/m3
106-46-7	147	p-Dichlorobenzene	ND	0.40	0.070	ppbv		ND	2.4	0.42	ug/m3
10061-02-6	111	trans-1,3-Dichloropropene	ND	0.80	0.078	ppbv		ND	3.6	0.35	ug/m3

ND = Not detected MDL = Method Detection Limit

RL = Reporting Limit

E = Indicates value exceeds calibration range

J = Indicates an estimated value

B = Indicates analyte found in associated method blank

Report of Analysis

Client Sample ID: SG-2-031919

Lab Sample ID: JC84841-2 **Date Sampled:** 03/19/19 Matrix: **Date Received:** 03/20/19 AIR - Soil Vapor Comp. Summa ID: A635 Percent Solids: n/a

Method: TO-15

Fortive, New Windsor, NY **Project:**

VOA TO15 List

CAS No.	MW	Compound	Result	RL	MDL	Units	Q	Result	RL	MDL	Units
64-17-5	46.07	Ethanol	27.4	2.0	0.87	ppbv		51.6	3.8	1.6	ug/m3
100-41-4	106.2	Ethylbenzene	2.9	0.80	0.060	ppbv		13	3.5	0.26	ug/m3
141-78-6	88	Ethyl Acetate	0.51	0.80	0.15	ppbv	J	1.8	2.9	0.54	ug/m3
622-96-8	120.2	4-Ethyltoluene	ND	0.80	0.12	ppbv		ND	3.9	0.59	ug/m3
76-13-1	187.4	Freon 113	57.7	0.40	0.068	ppbv		442	3.1	0.52	ug/m3
76-14-2	170.9	Freon 114	ND	0.40	0.076	ppbv		ND	2.8	0.53	ug/m3
142-82-5	100.2	Heptane	1.2	0.80	0.070	ppbv		4.9	3.3	0.29	ug/m3
87-68-3	260.8	Hexachlorobutadiene	ND	0.36	0.18	ppbv		ND	3.8	1.9	ug/m3
110-54-3	86.17	Hexane	0.58	0.80	0.042	ppbv	J	2.0	2.8	0.15	ug/m3
591-78-6	100	2-Hexanone	ND	0.80	0.15	ppbv		ND	3.3	0.61	ug/m3
67-63-0	60.1	Isopropyl Alcohol	4.8	0.80	0.26	ppbv		12	2.0	0.64	ug/m3
75-09-2	84.94	Methylene chloride	ND	0.80	0.058	ppbv		ND	2.8	0.20	ug/m3
78-93-3	72.11	Methyl ethyl ketone	3.6	0.80	0.17	ppbv		11	2.4	0.50	ug/m3
108-10-1	100.2	Methyl Isobutyl Ketone	ND	0.80	0.14	ppbv		ND	3.3	0.57	ug/m3
1634-04-4	88.15	Methyl Tert Butyl Ether	ND	0.80	0.077	ppbv		ND	2.9	0.28	ug/m3
80-62-6	100.12	Methylmethacrylate	ND	0.80	0.13	ppbv		ND	3.3	0.53	ug/m3
115-07-1	42	Propylene	ND	2.0	0.064	ppbv		ND	3.4	0.11	ug/m3
100-42-5	104.1	Styrene	3.3	0.80	0.076	ppbv		14	3.4	0.32	ug/m3
71-55-6	133.4	1,1,1-Trichloroethane	31.8	0.40	0.13	ppbv		174	2.2	0.71	ug/m3
79-34-5	167.9	1,1,2,2-Tetrachloroethane	ND	0.40	0.11	ppbv		ND	2.7	0.76	ug/m3
79-00-5	133.4	1,1,2-Trichloroethane	ND	0.40	0.12	ppbv		ND	2.2	0.65	ug/m3
120-82-1	181.5	1,2,4-Trichlorobenzene	ND	0.40	0.35	ppbv		ND	3.0	2.6	ug/m3
95-63-6	120.2	1,2,4-Trimethylbenzene	0.46	0.80	0.13	ppbv	J	2.3	3.9	0.64	ug/m3
108-67-8	120.2	1,3,5-Trimethylbenzene	ND	0.80	0.13	ppbv		ND	3.9	0.64	ug/m3
540-84-1	114.2	2,2,4-Trimethylpentane	0.51	0.80	0.087	ppbv	J	2.4	3.7	0.41	ug/m3
75-65-0	74.12	Tertiary Butyl Alcohol	1.5	0.80	0.055	ppbv		4.5	2.4	0.17	ug/m3
127-18-4	165.8	Tetrachloroethylene	0.37	0.16	0.12	ppbv		2.5	1.1	0.81	ug/m3
109-99-9	72.11	Tetrahydrofuran	ND	0.80	0.20	ppbv		ND	2.4	0.59	ug/m3
108-88-3	92.14	Toluene	17.6	0.80	0.058	ppbv		66.3	3.0	0.22	ug/m3
79-01-6	131.4	Trichloroethylene	0.73	0.16	0.076	ppbv		3.9	0.86	0.41	ug/m3
75-69-4	137.4	Trichlorofluoromethane	3.3	0.40	0.11	ppbv		19	2.2	0.62	ug/m3
75-01-4	62.5	Vinyl chloride	ND	0.16	0.089	ppbv		ND	0.41	0.23	ug/m3
108-05-4	86	Vinyl Acetate	ND	0.80	0.14	ppbv		ND	2.8	0.49	ug/m3
	106.2	m,p-Xylene	9.9	0.80	0.14	ppbv		43	3.5	0.61	ug/m3
95-47-6	106.2	o-Xylene	5.6	0.80	0.068	ppbv		24	3.5	0.30	ug/m3
1330-20-7	106.2	Xylenes (total)	15.5	0.80	0.068	ppbv		67.3	3.5	0.30	ug/m3

CAS No. **Surrogate Recoveries** Run# 1 Run# 2 Limits

460-00-4 4-Bromofluorobenzene 104% 65-128%

ND = Not detected MDL = Method Detection Limit

RL = Reporting Limit

E = Indicates value exceeds calibration range

J = Indicates an estimated value

B = Indicates analyte found in associated method blank

Page 1 of 2

Report of Analysis

Client Sample ID: SG-3-031919

Lab Sample ID:JC84841-3Date Sampled:03/19/19Matrix:AIR - Soil Vapor Comp.Summa ID:M220Date Received:03/20/19Mathed:TO 15Propert Sallidar and Sallidar

Method: TO-15 Percent Solids: n/a

Project: Fortive, New Windsor, NY

File ID DF Analyzed By Prep Date Prep Batch Analytical Batch
Run #1 5W35791.D 1 03/27/19 20:13 GP n/a n/a V5W1460
Run #2

Initial Volume

Run #1 100 ml

Run #2

VOA TO15 List

CAS No.	MW	Compound	Result	RL	MDL	Units Q	Result	RL	MDL	Units
67-64-1	58.08	Acetone	6.7	0.80	0.45	ppbv	16	1.9	1.1	ug/m3
106-99-0	54.09	1,3-Butadiene	ND	0.80	0.18	ppbv	ND	1.8	0.40	ug/m3
71-43-2	78.11	Benzene	ND	0.80	0.048	ppbv	ND	2.6	0.15	ug/m3
75-27-4	163.8	Bromodichloromethane	ND	0.40	0.11	ppbv	ND	2.7	0.74	ug/m3
75-25-2	252.8	Bromoform	ND	0.16	0.15	ppbv	ND	1.7	1.6	ug/m3
74-83-9	94.94	Bromomethane	ND	0.80	0.088	ppbv	ND	3.1	0.34	ug/m3
593-60-2	106.9	Bromoethene	ND	0.80	0.088	ppbv	ND	3.5	0.38	ug/m3
100-44-7	126	Benzyl Chloride	ND	0.80	0.23	ppbv	ND	4.1	1.2	ug/m3
75-15-0	76.14	Carbon disulfide	ND	0.80	0.094	ppbv	ND	2.5	0.29	ug/m3
108-90-7	112.6	Chlorobenzene	ND	0.80	0.10	ppbv	ND	3.7	0.46	ug/m3
75-00-3	64.52	Chloroethane	ND	0.80	0.19	ppbv	ND	2.1	0.50	ug/m3
67-66-3	119.4	Chloroform	ND	0.80	0.080	ppbv	ND	3.9	0.39	ug/m3
74-87-3	50.49	Chloromethane	ND	0.80	0.061	ppbv	ND	1.7	0.13	ug/m3
107-05-1	76.53	3-Chloropropene	ND	0.80	0.16	ppbv	ND	2.5	0.50	ug/m3
95-49-8	126.6	2-Chlorotoluene	ND	0.80	0.10	ppbv	ND	4.1	0.52	ug/m3
56-23-5	153.8	Carbon tetrachloride	ND	0.16	0.094	ppbv	ND	1.0	0.59	ug/m3
110-82-7	84.16	Cyclohexane	ND	0.80	0.088	ppbv	ND	2.8	0.30	ug/m3
75-34-3	98.96	1,1-Dichloroethane	ND	0.80	0.046	ppbv	ND	3.2	0.19	ug/m3
75-35-4	96.94	1,1-Dichloroethylene	ND	0.16	0.067	ppbv	ND	0.63	0.27	ug/m3
106-93-4	187.9	1,2-Dibromoethane	ND	0.40	0.071	ppbv	ND	3.1	0.55	ug/m3
107-06-2	98.96	1,2-Dichloroethane	ND	0.80	0.083	ppbv	ND	3.2	0.34	ug/m3
78-87-5	113	1,2-Dichloropropane	ND	0.80	0.077	ppbv	ND	3.7	0.36	ug/m3
123-91-1	88.12	1,4-Dioxane	ND	0.80	0.21	ppbv	ND	2.9	0.76	ug/m3
75-71-8	120.9	Dichlorodifluoromethane	5.7	0.80	0.066	ppbv	28	4.0	0.33	ug/m3
124-48-1	208.3	Dibromochloromethane	ND	0.40	0.13	ppbv	ND	3.4	1.1	ug/m3
156-60-5	96.94	trans-1,2-Dichloroethylene	ND	0.80	0.029	ppbv	ND	3.2	0.11	ug/m3
156-59-2	96.94	cis-1,2-Dichloroethylene	ND	0.16	0.047	ppbv	ND	0.63	0.19	ug/m3
10061-01-5	111	cis-1,3-Dichloropropene	ND	0.80	0.078	ppbv	ND	3.6	0.35	ug/m3
541-73-1	147	m-Dichlorobenzene	ND	0.40	0.076	ppbv	ND	2.4	0.46	ug/m3
95-50-1	147	o-Dichlorobenzene	ND	0.16	0.087		ND	0.96	0.52	ug/m3
106-46-7	147	p-Dichlorobenzene	ND	0.40	0.070		ND	2.4	0.42	ug/m3
10061-02-6	111	trans-1,3-Dichloropropene	ND	0.80	0.078	ppbv	ND	3.6	0.35	ug/m3

ND = Not detected MDL = Method Detection Limit

RL = Reporting Limit

E = Indicates value exceeds calibration range

J = Indicates an estimated value

B = Indicates analyte found in associated method blank

Report of Analysis

Client Sample ID: SG-3-031919

Lab Sample ID: JC84841-3 **Date Sampled:** 03/19/19 Matrix: **Date Received:** 03/20/19 AIR - Soil Vapor Comp. Summa ID: M220 Percent Solids: n/a

Method: TO-15

Fortive, New Windsor, NY **Project:**

VOA TO15 List

CAS No.	MW	Compound	Result	RL	MDL	Units	Q	Result	RL	MDL	Units
64-17-5	46.07	Ethanol	14.0	2.0	0.87	ppbv		26.4	3.8	1.6	ug/m3
100-41-4	106.2	Ethylbenzene	4.5	0.80	0.060	ppbv		20	3.5	0.26	ug/m3
141-78-6	88	Ethyl Acetate	ND	0.80	0.15	ppbv		ND	2.9	0.54	ug/m3
622-96-8	120.2	4-Ethyltoluene	ND	0.80	0.12	ppbv		ND	3.9	0.59	ug/m3
76-13-1	187.4	Freon 113	3.7	0.40	0.068	ppbv		28	3.1	0.52	ug/m3
76-14-2	170.9	Freon 114	ND	0.40	0.076	ppbv		ND	2.8	0.53	ug/m3
142-82-5	100.2	Heptane	1.0	0.80	0.070	ppbv		4.1	3.3	0.29	ug/m3
87-68-3	260.8	Hexachlorobutadiene	ND	0.36	0.18	ppbv		ND	3.8	1.9	ug/m3
110-54-3	86.17	Hexane	0.50	0.80	0.042	ppbv	J	1.8	2.8	0.15	ug/m3
591-78-6	100	2-Hexanone	ND	0.80	0.15	ppbv		ND	3.3	0.61	ug/m3
67-63-0	60.1	Isopropyl Alcohol	4.4	0.80	0.26	ppbv		11	2.0	0.64	ug/m3
75-09-2	84.94	Methylene chloride	ND	0.80	0.058	ppbv		ND	2.8	0.20	ug/m3
78-93-3	72.11	Methyl ethyl ketone	3.4	0.80	0.17	ppbv		10	2.4	0.50	ug/m3
108-10-1	100.2	Methyl Isobutyl Ketone	ND	0.80	0.14	ppbv		ND	3.3	0.57	ug/m3
1634-04-4	88.15	Methyl Tert Butyl Ether	ND	0.80	0.077	ppbv		ND	2.9	0.28	ug/m3
80-62-6	100.12	Methylmethacrylate	ND	0.80	0.13	ppbv		ND	3.3	0.53	ug/m3
115-07-1	42	Propylene	ND	2.0	0.064	ppbv		ND	3.4	0.11	ug/m3
100-42-5	104.1	Styrene	6.6	0.80	0.076	ppbv		28	3.4	0.32	ug/m3
71-55-6	133.4	1,1,1-Trichloroethane	8.5	0.40	0.13	ppbv		46	2.2	0.71	ug/m3
79-34-5	167.9	1,1,2,2-Tetrachloroethane	ND	0.40	0.11	ppbv		ND	2.7	0.76	ug/m3
79-00-5	133.4	1,1,2-Trichloroethane	ND	0.40	0.12	ppbv		ND	2.2	0.65	ug/m3
120-82-1	181.5	1,2,4-Trichlorobenzene	ND	0.40	0.35	ppbv		ND	3.0	2.6	ug/m3
95-63-6	120.2	1,2,4-Trimethylbenzene	0.56	0.80	0.13	ppbv	J	2.8	3.9	0.64	ug/m3
108-67-8	120.2	1,3,5-Trimethylbenzene	ND	0.80	0.13	ppbv		ND	3.9	0.64	ug/m3
540-84-1	114.2	2,2,4-Trimethylpentane	0.40	0.80	0.087	ppbv	J	1.9	3.7	0.41	ug/m3
75-65-0	74.12	Tertiary Butyl Alcohol	2.5	0.80	0.055	ppbv		7.6	2.4	0.17	ug/m3
127-18-4	165.8	Tetrachloroethylene	21.6	0.16	0.12	ppbv		146	1.1	0.81	ug/m3
109-99-9	72.11	Tetrahydrofuran	ND	0.80	0.20	ppbv		ND	2.4	0.59	ug/m3
108-88-3	92.14	Toluene	19.9	0.80	0.058	ppbv		75.0	3.0	0.22	ug/m3
79-01-6	131.4	Trichloroethylene	ND	0.16	0.076	ppbv		ND	0.86	0.41	ug/m3
75-69-4	137.4	Trichlorofluoromethane	2.9	0.40	0.11	ppbv		16	2.2	0.62	ug/m3
75-01-4	62.5	Vinyl chloride	ND	0.16	0.089	ppbv		ND	0.41	0.23	ug/m3
108-05-4	86	Vinyl Acetate	ND	0.80	0.14	ppbv		ND	2.8	0.49	ug/m3
	106.2	m,p-Xylene	16.3	0.80	0.14	ppbv		70.8	3.5	0.61	ug/m3
95-47-6	106.2	o-Xylene	9.6	0.80	0.068	ppbv		42	3.5	0.30	ug/m3
1330-20-7	106.2	Xylenes (total)	25.8	0.80	0.068	ppbv		112	3.5	0.30	ug/m3

CAS No. **Surrogate Recoveries** Run# 1 Run# 2 Limits

460-00-4 4-Bromofluorobenzene 107% 65-128%

ND = Not detected MDL = Method Detection Limit

RL = Reporting Limit

E = Indicates value exceeds calibration range

J = Indicates an estimated value

B = Indicates analyte found in associated method blank

Page 1 of 2

Report of Analysis

Client Sample ID: AA-3-031919

Lab Sample ID: JC84841-4 **Date Sampled:** 03/19/19 Matrix: AIR - Indoor Air Comp. Summa ID: M004 **Date Received:** 03/20/19

Method: TO-15 Percent Solids: n/a

Project: Fortive, New Windsor, NY

File ID DF **Prep Date Analytical Batch** Analyzed By **Prep Batch** V5W1462 Run #1 5W35851.D 1 03/30/19 02:26 GP n/a n/a Run #2

Initial Volume

Run #1 500 ml

Run #2

VOA TO15 List

CAS No.	MW	Compound	Result	RL	MDL	Units	Q	Result	RL	MDL	Units
67-64-1	58.08	Acetone	10.1	0.16	0.090	ppbv		24.0	0.38	0.21	ug/m3
106-99-0	54.09	1,3-Butadiene	ND	0.16	0.037			ND	0.35	0.082	ug/m3
71-43-2	78.11	Benzene	0.50	0.16	0.009	5 ppbv		1.6	0.51	0.030	ug/m3
75-27-4	163.8	Bromodichloromethane	ND	0.080	0.021	ppbv		ND	0.54	0.14	ug/m3
75-25-2	252.8	Bromoform	ND	0.032	0.030	ppbv		ND	0.33	0.31	ug/m3
74-83-9	94.94	Bromomethane	ND	0.16	0.018	ppbv		ND	0.62	0.070	ug/m3
593-60-2	106.9	Bromoethene	ND	0.16	0.018	ppbv		ND	0.70	0.079	ug/m3
100-44-7	126	Benzyl Chloride	ND	0.16	0.045	ppbv		ND	0.82	0.23	ug/m3
75-15-0	76.14	Carbon disulfide	ND	0.16	0.019	ppbv		ND	0.50	0.059	ug/m3
108-90-7	112.6	Chlorobenzene	ND	0.16	0.021	ppbv		ND	0.74	0.097	ug/m3
75-00-3	64.52	Chloroethane	ND	0.16	0.039	ppbv		ND	0.42	0.10	ug/m3
67-66-3	119.4	Chloroform	ND	0.16	0.016	ppbv		ND	0.78	0.078	ug/m3
74-87-3	50.49	Chloromethane	0.58	0.16	0.012	ppbv		1.2	0.33	0.025	ug/m3
107-05-1	76.53	3-Chloropropene	ND	0.16	0.032	ppbv		ND	0.50	0.10	ug/m3
95-49-8	126.6	2-Chlorotoluene	ND	0.16	0.020	ppbv		ND	0.83	0.10	ug/m3
56-23-5	153.8	Carbon tetrachloride	0.078	0.032	0.019	ppbv		0.49	0.20	0.12	ug/m3
110-82-7	84.16	Cyclohexane	0.28	0.16	0.018	ppbv		0.96	0.55	0.062	ug/m3
75-34-3	98.96	1,1-Dichloroethane	ND	0.16	0.009	3 ppbv		ND	0.65	0.038	ug/m3
75-35-4	96.94	1,1-Dichloroethylene	ND	0.032	0.013	ppbv		ND	0.13	0.052	ug/m3
106-93-4	187.9	1,2-Dibromoethane	ND	0.080	0.014	ppbv		ND	0.61	0.11	ug/m3
107-06-2	98.96	1,2-Dichloroethane	0.11	0.16	0.017	ppbv	J	0.45	0.65	0.069	ug/m3
78-87-5	113	1,2-Dichloropropane	ND	0.16	0.015	ppbv		ND	0.74	0.069	ug/m3
123-91-1	88.12	1,4-Dioxane	ND	0.16	0.042	ppbv		ND	0.58	0.15	ug/m3
75-71-8	120.9	Dichlorodifluoromethane	0.51	0.16	0.013	ppbv		2.5	0.79	0.064	ug/m3
124-48-1	208.3	Dibromochloromethane	ND	0.080	0.027	ppbv		ND	0.68	0.23	ug/m3
156-60-5	96.94	trans-1,2-Dichloroethylene	ND	0.16	0.005	8 ppbv		ND	0.63	0.023	ug/m3
156-59-2	96.94	cis-1,2-Dichloroethylene	0.72	0.032	0.0094	4 ppbv		2.9	0.13	0.037	ug/m3
10061-01-5	111	cis-1,3-Dichloropropene	ND	0.16	0.016	ppbv		ND	0.73	0.073	ug/m3
541-73-1	147	m-Dichlorobenzene	ND	0.080	0.015	ppbv		ND	0.48	0.090	ug/m3
95-50-1	147	o-Dichlorobenzene	ND	0.032	0.017			ND	0.19	0.10	ug/m3
106-46-7	147	p-Dichlorobenzene	ND	0.080	0.014	ppbv		ND	0.48	0.084	ug/m3
10061-02-6	111	trans-1,3-Dichloropropene	ND	0.16	0.016	ppbv		ND	0.73	0.073	ug/m3

ND = Not detected MDL = Method Detection Limit

RL = Reporting Limit

E = Indicates value exceeds calibration range

J = Indicates an estimated value

B = Indicates analyte found in associated method blank

Report of Analysis

Client Sample ID: AA-3-031919

Lab Sample ID: JC84841-4 **Date Sampled:** 03/19/19 Matrix: AIR - Indoor Air Comp. Summa ID: M004 **Date Received:** 03/20/19 Percent Solids: n/a

Method: TO-15

Project: Fortive, New Windsor, NY

VOA TO15 List

CAS No.	MW	Compound	Result	RL	MDL	Units	Q	Result	RL	MDL	Units
64-17-5	46.07	Ethanol	79.8	0.40	0.17	ppbv	Е	150	0.75	0.32	ug/m3
100-41-4	106.2	Ethylbenzene	2.7	0.16	0.012			12	0.69	0.052	ug/m3
141-78-6	88	Ethyl Acetate	1.5	0.16	0.030			5.4	0.58	0.11	ug/m3
622-96-8	120.2	4-Ethyltoluene	0.13	0.16	0.024		J	0.64	0.79	0.12	ug/m3
76-13-1	187.4	Freon 113	ND	0.080	0.014			ND	0.61	0.11	ug/m3
76-14-2	170.9	Freon 114	ND	0.080	0.015	ppbv		ND	0.56	0.10	ug/m3
142-82-5	100.2	Heptane	1.9	0.16	0.014	ppbv		7.8	0.66	0.057	ug/m3
87-68-3	260.8	Hexachlorobutadiene	ND	0.072	0.036	ppbv		ND	0.77	0.38	ug/m3
110-54-3	86.17	Hexane	1.0	0.16	0.0085	ppbv		3.5	0.56	0.030	ug/m3
591-78-6	100	2-Hexanone	0.68	0.16	0.029			2.8	0.65	0.12	ug/m3
67-63-0	60.1	Isopropyl Alcohol	4.0	0.16	0.052	ppbv		9.8	0.39	0.13	ug/m3
75-09-2	84.94	Methylene chloride	1.8	0.16	0.012	ppbv		6.3	0.56	0.042	ug/m3
78-93-3	72.11	Methyl ethyl ketone	2.9	0.16	0.034	ppbv		8.6	0.47	0.10	ug/m3
108-10-1	100.2	Methyl Isobutyl Ketone	1.1	0.16	0.029	ppbv		4.5	0.66	0.12	ug/m3
1634-04-4	88.15	Methyl Tert Butyl Ether	0.11	0.16	0.015	ppbv	J	0.40	0.58	0.054	ug/m3
80-62-6	100.12	Methylmethacrylate	ND	0.16	0.026	ppbv		ND	0.66	0.11	ug/m3
115-07-1	42	Propylene	ND	0.40	0.013	ppbv		ND	0.69	0.022	ug/m3
100-42-5	104.1	Styrene	3.2	0.16	0.015	ppbv		14	0.68	0.064	ug/m3
71-55-6	133.4	1,1,1-Trichloroethane	ND	0.080	0.027	ppbv		ND	0.44	0.15	ug/m3
79-34-5	167.9	1,1,2,2-Tetrachloroethane	ND	0.080	0.022	ppbv		ND	0.55	0.15	ug/m3
79-00-5	133.4	1,1,2-Trichloroethane	ND	0.080	0.024	ppbv		ND	0.44	0.13	ug/m3
120-82-1	181.5	1,2,4-Trichlorobenzene	ND	0.080	0.071	ppbv		ND	0.59	0.53	ug/m3
95-63-6	120.2	1,2,4-Trimethylbenzene	0.28	0.16	0.026	ppbv		1.4	0.79	0.13	ug/m3
108-67-8	120.2	1,3,5-Trimethylbenzene	0.10	0.16	0.027	ppbv	J	0.49	0.79	0.13	ug/m3
540-84-1	114.2	2,2,4-Trimethylpentane	0.57	0.16	0.017	ppbv		2.7	0.75	0.079	ug/m3
75-65-0	74.12	Tertiary Butyl Alcohol	5.8	0.16	0.011	ppbv		18	0.49	0.033	ug/m3
127-18-4	165.8	Tetrachloroethylene	0.58	0.032	0.025	ppbv		3.9	0.22	0.17	ug/m3
109-99-9	72.11	Tetrahydrofuran	0.20	0.16	0.040	ppbv		0.59	0.47	0.12	ug/m3
108-88-3	92.14	Toluene	19.3	0.16	0.012			72.7	0.60	0.045	ug/m3
79-01-6	131.4	Trichloroethylene	0.18	0.032	0.015			0.97	0.17	0.081	ug/m3
75-69-4	137.4	Trichlorofluoromethane	0.75	0.080				4.2	0.45	0.12	ug/m3
75-01-4	62.5	Vinyl chloride	ND	0.032	0.018	ppbv		ND	0.082	0.046	ug/m3
108-05-4	86	Vinyl Acetate	ND	0.16	0.027			ND	0.56	0.095	ug/m3
	106.2	m,p-Xylene	9.0	0.16	0.027	1 1		39	0.69	0.12	ug/m3
95-47-6	106.2	o-Xylene	5.2	0.16	0.014			23	0.69	0.061	ug/m3
1330-20-7	106.2	Xylenes (total)	14.1	0.16	0.014	ppbv		61.2	0.69	0.061	ug/m3

CAS No. **Surrogate Recoveries** Run#1 Run# 2 Limits

460-00-4 4-Bromofluorobenzene 104% 65-128%

ND = Not detected MDL = Method Detection Limit

RL = Reporting Limit

E = Indicates value exceeds calibration range

J = Indicates an estimated value

B = Indicates analyte found in associated method blank

Section 5

Dayton, NJ

Misc. Forms

Custody Documents and Other Forms

Includes the following where applicable:

- Chain of Custody
- Summa Canister and Flow Controller Log

U

	200		AIR		All	R CHA	IN OF	cus	TOD	Υ			PAG		OF				
	000					2235 Rou TEL. 732-32		on, NJ 0881 X 732-329-3			FED-EX Tracki	ing #			# _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _			191	-
	All U.S.	Est- (c. 600		Access to the second	1 (000000000000000000000000000000000000	W	ww.sgs.com/e		10 X			Alexandra C	arameters		00			Analysi	4
Company		porting Information			Project Name	200000000000000000000000000000000000000	oject Inform	auon	VALUE OF		Temperature (F		arameters			Redu	ested	Analysi	4
Company	ERM - Melvil	6				active							Maximum:	4.		1			1
Address	105 Maxes				Street */\		le Brito	is R			40			, ,					1
City	Telalla N	ate Zip	,		City	111	P Dillo	() ID	State		Stop 3	1	Minimum:	43					
Project C	contact E-	mail			Project #	Windso			N /		Atmoshpheric F Start:	ressure (inche	Maximum:			l l	_		1
Ka	Gen Pickesina K	osen. Piekerny 6	ERM.	ion	0	50 14 se Order #	P6				Stop:		Minimum:			1 -1	7		
Phone	631/75-6-8900"	X#			TE TUTCHE	se Order #					Stop.		Millingin.] 🗐	35		1
Samplen	s) Name(s)	ronkel									Other weather of	omment:					M		
	NAME OF TAXABLE PARTY.	Air Type	Sam	pling Equipme	ent Info	8	Start Samp	ling Inform	nation			Stop Sam	oling Inform	nation		5	7		
Lab					Flow		Time	Canister	Interior			Time	Canister	Interior		10	215		
Sample	Find ID / Doint of Collecti	Indoor (I) Soil Vap (SV)	Canister	Canister Size	Controller	Doto	(24hr	Pressure		Sampler	Date	(24hr clock)	Pressure ("Hg)		Sampler Init.	1	Ħ		1
#	Field ID / Point of Collecti	on Ambient (A)	Serial #	6L or 1L	Serial #	3(19	Clock)	37	64	Init.	3/19	1610	6	14	Dr.	V	十	\top	1
<u> </u>	56-2-031919	SV	4635	16	FC-332	3/19	0815	29	64	Do	3/19	1618	6	/ 4	27	m	7	\top	1
2	5 6 - 2 - 23 19 19	SV		1	FC606	3119	0830	1	64	20	3119	1630		64	100		X	=	14
11	1 3 031919	7	W 320	7		3/19		100	1.	20	319		7.	64	132	7	Ť	+	1
٣,	AA-3-031919		100 m	.	mc084	2/19	0835	32	64	SP	1319	1534	17	64	20		+	$\overline{}$	٦v
├					_	8	-	-	-			+	-	-		\vdash	+	1	#
							-	<u> </u>	-		8	-	-			\vdash		45	4
								-					_	<u> </u>	_	Н	\rightarrow	-	4
_					ļ	8	┼		-	-		+	-	-		Н	+	+-	-
<u></u>							-	-	-			+	-	-		Н	+	+	┨
222500	Turnaround Time (Bu	siness days)					Data Delive	rable Inform	ition			a subtraction (c. 1922)	Comments	/ Remarks	<u> </u>				35
	Standard - 15 Days 10 Day	Approved By:				All NJDEP	TO-15 is ma	andatory Fu	II T1					- 1.4					1
	5 Day	Approved by.			-	Comm B		1			11	IITIAL AS	ESSME	NT	4 .0				
	3 Day	Date				Reduced T2 Full T1		-				ABUL VE	BIEICATI	ON					1
	2 Day 1 Day	Date			-	Other:]									
10000000	Other	Samo	e Custody	must be docum	ented below	DKQP report		possession	, includi	ng courier		entory is ver	ified upon i	eceipt in	the Labor	atory	4		
Reinquish	the Laboratory:	ste Tiple: 7/19 15:31	Received By:	No.	73/10		Relinquished		1/		Date Time:	1110	Received By	100	ان عا	/	1	amato at a	1
1/ Relipquist	dill ()	ste 7 lma:	Received By:		11/1	1 1881	Relinquished	By:		}	Date Time:	1110	Received By	<u> </u>	<u>~</u> /	auy	_		1
3 Relinquist		3/20/19 1830	Received By:				4 Custody Seal						4						-
5	eu sy.		5				Juniou, sea	"1153	Ö										1

Form:SM088-03D (revised 2-12-18)

http://www.sgs.com/en/terms-and-conditions

JC84841: Chain of Custody Page 1 of 2

SGS Sample Receipt Summary

Job Number:	JC84841	l	Client	ERM, INC	ORPORATED	Project: FORTIVE, NEW	WINDSOF	R, NY	
Date / Time Received:	3/20/201	9 6:30:0	00 PM	Delivery N	Method:	Airbill #'s:			
Cooler Temps (Raw Me	asured) °	C:							
Cooler Temps (Co	rrected) °	C:							
Cooler Security	Y or	N			Y or N	Sample Integrity - Documentation	<u>Y</u>	or N	
1. Custody Seals Present:	\checkmark		3. COC F		\checkmark	Sample labels present on bottles:	✓		
2. Custody Seals Intact:	\checkmark		4. Smpl Dat	es/Time OK		Container labeling complete:	\checkmark		
Cooler Temperature	_	Y or l	<u>N_</u>			3. Sample container label / COC agree:	V		
1. Temp criteria achieved:	:					Sample Integrity - Condition	<u>Y</u>	or N	
2. Cooler temp verification	n:	N/A		_		Sample recvd within HT:	V		
3. Cooler media:		N/A		_		2. All containers accounted for:	✓		
4. No. Coolers:		N/A		_		3. Condition of sample:		Intact	
Quality Control Preser	vation	Y or	N N/A	<u> </u>		· ·	Υ		NI/A
Trip Blank present / coo	oler:		✓ □			Sample Integrity - Instructions		or N	N/A
2. Trip Blank listed on CO						Analysis requested is clear:	✓	✓	
Samples preserved pro		~				Bottles received for unspecified tests			
		_				Sufficient volume recvd for analysis:	~		✓
4. VOCs headspace free:						Compositing instructions clear:			_
						5. Filtering instructions clear:			✓
Test Strip Lot #s:	pH 1-1	2:	206717		pH 12+: _	208717 Other: (Specify)			
Comments									
014000.00									
SM089-03 Rev. Date 12/7/17									

JC84841: Chain of Custody

Page 2 of 2

Summa Canister and Flow Controller Log

Job Number: JC84841

Account: ERMNYW ERM, Inc. **Project:** Fortive, New Windsor, NY

Received: 03/20/19

SUMMA	CA	NISTI	ERS										
Shipping	g						Receiving						
Summa		Vac	Date		SCC	SCC	Sample	Date		Vac	Pres	Final	Dil
ID	L	"Hg	Out	By	Batch	FileID	Number	In	By	'' Hg	psig	psig	Fact
A058	6	29.4	03/13/19	JT	CP10264	46W10960.D	JC84841-1	03/22/19	JT	6			1
A635	6	29.4	03/13/19	JT	CP10264	46W10960.D	JC84841-2	03/22/19	JT	5			1
M220	6	29.4	03/13/19	JT	CP1026	76W10976.D	JC84841-3	03/22/19	JT	6			1
M004	6	29.4	03/13/19	JT	CP1026	76W10976.D	JC84841-4	03/22/19	JT	0			1

Receiving Flow Date Cc/ Time Date Cc/ Flow Crtl ID Out By min hrs. In By min RPD Equipment Type	Flow Crtl ID Date Out cc/ min Time hrs. Date In cc/ min Flow RPD Equipment Type FC332 03/13/19 JT 9.6 8 03/25/19 JT 10.4 8 Flow Controller FC500 03/13/19 JT 9.6 8 03/25/19 JT 10.2 6.1 Flow Controller	Flow Date Crtl ID Out By min hrs. In By min RPD Equipment Type FC332 03/13/19 JT 9.6 8 03/25/19 JT 10.4 8 Flow Controller	FLOW C	ONTROL	LERS	/ OTH	ER					
Crtl ID Out By min hrs. In By min RPD Equipment Type FC332 03/13/19 JT 9.6 8 03/25/19 JT 10.4 8 Flow Controller	Crtl ID Out By min hrs. In By min RPD Equipment Type FC332 03/13/19 JT 9.6 8 03/25/19 JT 10.4 8 Flow Controller FC500 03/13/19 JT 9.6 8 03/25/19 JT 10.2 6.1 Flow Controller	Crtl ID Out By min hrs. In By min RPD Equipment Type FC332 03/13/19 JT 9.6 8 03/25/19 JT 10.4 8 Flow Controller FC500 03/13/19 JT 9.6 8 03/25/19 JT 10.2 6.1 Flow Controller FC606 03/13/19 JT 9.6 8 03/25/19 JT 10.9 12.7 Flow Controller	Shipping	Ţ				Receivin	g			
FC332 03/13/19 JT 9.6 8 03/25/19 JT 10.4 8 Flow Controller	FC332 03/13/19 JT 9.6 8 03/25/19 JT 10.4 8 Flow Controller FC500 03/13/19 JT 9.6 8 03/25/19 JT 10.2 6.1 Flow Controller	FC332 03/13/19 JT 9.6 8 03/25/19 JT 10.4 8 Flow Controller FC500 03/13/19 JT 9.6 8 03/25/19 JT 10.2 6.1 Flow Controller FC606 03/13/19 JT 9.6 8 03/25/19 JT 10.9 12.7 Flow Controller	Flow	Date		cc/	Time	Date		cc/	Flow	
	FC500 03/13/19 JT 9.6 8 03/25/19 JT 10.2 6.1 Flow Controller	FC500 03/13/19 JT 9.6 8 03/25/19 JT 10.2 6.1 Flow Controller FC606 03/13/19 JT 9.6 8 03/25/19 JT 10.9 12.7 Flow Controller	Crtl ID	Out	$\mathbf{B}\mathbf{y}$	min	hrs.	In	By	min	RPD	Equipment Type
	FC500 03/13/19 JT 9.6 8 03/25/19 JT 10.2 6.1 Flow Controller	FC500 03/13/19 JT 9.6 8 03/25/19 JT 10.2 6.1 Flow Controller FC606 03/13/19 JT 9.6 8 03/25/19 JT 10.9 12.7 Flow Controller	EC222	02/12/10	IT	0.6	Q	02/25/10	IT	10.4	Q	Flow Controller
		FC606 03/13/19 JT 9.6 8 03/25/19 JT 10.9 12.7 Flow Controller		00, 10, 1,				00, 00, 0			~	

SGS Bottle Order(s):

TM-03519-191

Prep Date Room Temp(F) Bar Pres 'Hg 03/13/19 70 29.92

ERM has over 160 offices across the following countries and territories worldwide

Argentina The Netherlands Australia New Zealand Belgium Norway Brazil Panama Canada Peru Chile Poland China Portugal Colombia Puerto Rico France Romania Germany Russia Guyana Singapore Hong Kong South Africa South Korea India Spain Indonesia Ireland Sweden Switzerland Italy Japan Taiwan Tanzania Kazakhstan Kenya Thailand Malaysia UK Mexico US Mozambique Vietnam Myanmar

ERM Inc.

105 Maxess Road

Suite 316

Melville NY 11747

T: 631-756-8900 F: Add fax number

www.erm.com

