

August 31, 2020

Mr. Justin Starr, PG
New York State Department of Environmental Conservation
Division of Environmental Remediation
Remedial Bureau C
625 Broadway
Albany, NY 12233-70134

**Re: National Grid Kingsley Avenue Site
Rome, New York
2020 2nd Quarter OM&M Report**

Dear Mr. Starr:

Enclosed for your review is the 2020 2nd Quarter Operation, Maintenance, and Monitoring (OM&M) Report for the National Grid Rome (Kingsley Avenue) Site. OM&M is being conducted in accordance with the Site Management Plan (SMP) and OM&M Plan issued May 31, 2013. National Grid filed the updated Declaration of Covenants and Restrictions with Oneida County on December 15, 2017. National Grid also submitted the final Site Management Plan to the NYSDEC on January 24, 2018. The NYSDEC provided comments to the SMP and Final Engineering Report on March 3, 2019. National Grid submitted the final SMP and FER on November 30, 2019.

The completed quarterly OM&M activities included:

- A quarterly site inspection;
- Collection of quarterly static water level measurements of site wells;
- Collection and laboratory analysis of quarterly groundwater samples from OU-1 groundwater wells;
- Collection and laboratory analysis of quarterly groundwater extraction system samples; and
- Monitoring and/or collection of light non-aqueous phase liquid and dense non-aqueous phase liquid at site wells.

The groundwater extraction system is operating continuously and discharging to the sanitary sewer under the existing City of Rome Water Pollution Control Authority discharge permit. A chemical treatment system to minimize iron fouling within the

Mr. Justin Starr, PG
August 31, 2020
Page 2 of 2

groundwater extraction manhole, submersible pump, and piping also operates continuously.

If you have any questions regarding the report or the scheduled activities, feel free to contact me at (315) 428-5652.

Very truly yours,

A handwritten signature in black ink, appearing to read 'S. Stucker', with a stylized, elongated tail.

for SPS

Steven P. Stucker, C.P.G.
Lead Environmental Engineer
National Grid

Enclosures

Cc: Devin Shay - Groundwater & Environmental Services, Inc.

National Grid

2020 2nd Quarter Operations, Maintenance, and Monitoring Report



National Grid Rome Former MGP Site
233 Kingsley Avenue
Rome, NY 13440

August 2020

Version 1





2020 2nd Quarter OM&M Report

National Grid Rome Former MGP Site
233 Kingsley Avenue
Rome, NY 13440

Prepared for:
National Grid
300 Erie Boulevard West, C-1
Syracuse, NY 13202

Prepared by:
Groundwater & Environmental Services, Inc.
5 Technology Place, Suite 4
East Syracuse, NY 13057
TEL: 800-220-3069
www.gesonline.com

GES Project:
0603123.134400.221

Date:
August 28, 2020

Devin T. Shay, PG
Program Manager / Principal Hydrogeologist



Table of Contents

1	Introduction	1
1.1	Overview	1
1.2	Site Description	1
1.3	Site History	2
2	Operation, Maintenance, and Monitoring Activities.....	5
2.1	Quarterly Site Inspection.....	5
2.2	Quarterly Static Water Level Measurements	5
2.3	Quarterly Groundwater Monitoring Event.....	5
2.4	Quarterly Light Non-Aqueous Phase Liquid and Dense Non-Aqueous Phase Liquid Monitoring/Collection Event	6
2.5	Quarterly Groundwater Extraction System Discharge Sampling Event	7
2.6	Groundwater Extraction System Discharge Flow and Operation, Maintenance, and Monitoring	7
2.7	Vegetation Management and Snow Removal.....	8
3	Conclusions, Recommendations, and Certifications.....	9
3.1	Conclusions.....	9
3.2	Recommendations	9
3.3	Certifications	10



Figures

- Figure 1 – Site Location Map
- Figure 2 – Site Map
- Figure 3 – Site Map – West
- Figure 4 – Site Map – East
- Figure 5 – Barrier Wall Profile

Tables

- Table 1 – Groundwater Extraction System Discharge Flow
- Table 2 – Site Monitoring Wells
- Table 3 – Historical Groundwater Data
- Table 4 – Groundwater Analytical Data
- Table 5 – Discharge Analytical Data

Appendices

- Appendix A – Field Inspection Report
- Appendix B – Quarterly Gauging Data
- Appendix C – Well Sampling Field Data
- Appendix D – Data Usability Summary Report and Analytical Data



Acronyms

AWQS	Ambient Water Quality Standards	OM&M	Operations, Maintenance, and Monitoring
BTEX	Benzene, Toluene, Ethylbenzene, and Total Xylenes	OU	Operable Unit
DNAPL	Dense Non-Aqueous Phase Liquid	Pace	Pace Analytical Services, LLC
DUSR	Data Usability Summary Report	PAH	Polycyclic Aromatic Hydrocarbons
GES	Groundwater & Environmental Services, Inc.	POTW	Publically Owned Treatment Works
gpm	Gallons per Minute	QA/QC	Quality Assurance / Quality Control
IRM	Interim Remedial Measures	ROD	Record of Decision
LNAPL	Light Non-Aqueous Phase Liquid	SMP	Site Management Plan
MGP	Manufactured Gas Plant	USEPA	United States Environmental Protection Agency
NYSDEC	New York State Department of Environmental Conservation	WPCF	Water Pollution Control Facility



1 Introduction

1.1 Overview

Groundwater & Environmental Services, Inc. (GES) has prepared this 2020 2nd Quarter Operations, Maintenance, and Monitoring Report (OM&M) on behalf of National Grid. This report compiles the OM&M activities completed in the 2nd quarter of 2020 at the Former Kingsley Avenue Manufactured Gas Plant (MGP) Site (the Site), located in Rome, New York. The Site has been classified as a Class 2 inactive hazardous waste disposal site by the New York State Department of Environmental Conservation (NYSDEC) and is identified as Site No. 633043.

In accordance with the Record of Decision (March 2002) and following successful completion of the selected remedy, long-term OM&M is required at the Site. The Site Management Plan (SMP) and Final Engineering Report (FER) for Operable Unit (OU) -1 and OU-2 were submitted to NYSDEC on November 30, 2019.

The following long-term OM&M activities are conducted in accordance with the SMP to monitor the effectiveness of the remediation previously conducted:

- Quarterly inspection of the Site (March, June, September, December);
- Collection of quarterly static water level measurements at the 34 site wells (16 Operable Unit [OU]-1 shallow and deep groundwater wells, eight dense non-aqueous phase liquid (DNAPL) wells, five OU-2 groundwater wells, and five extraction trench monitoring wells);
- Collection of quarterly groundwater samples from the 16 OU-1 shallow and deep groundwater wells and laboratory analysis of samples;
- Monitoring and/or collection of light non-aqueous phase liquid (LNAPL) and DNAPL monitoring at the 34 site wells, as needed. Offsite disposal of collected DNAPL at least once every 12 months;
- Removal of vegetation and snow, as necessary, to allow for access to the Site; and
- Submittal of quarterly OM&M reports to NYSDEC.

The groundwater extraction system is fully operational and discharges to the nearby sanitary sewer under an existing City of Rome Water Pollution Control Facility (WPCF) discharge permit. Discharge water samples are collected and analyzed quarterly for comparison to the permit limits as part of OM&M.

This OM&M Quarterly Report covers OM&M activities conducted during April, May, and June 2020.

1.2 Site Description

The Site is located within the City of Rome, Oneida County, New York. Refer to **Figure 1** for the Site location map. The Site consists of an approximately 22 acre parcel owned by National Grid. MGP operations formerly covered the northern half of the Site. The southern portion of the Site



consists of a National Grid electric substation, where some MGP impacts were left in place due to the inability to excavate on an active substation. National Grid presently operates and maintains a natural gas valving station located adjacent to the terminus of Kingsley Avenue.

The Site is located south of East Dominick Street, bordering a historic commercial and residential district, approximately 2,000 feet north of the confluence of the Mohawk River with the New York State Barge Canal. It is bounded by the Genesee and Mohawk Valley Railroad to the north, and the Mohawk River forms the western boundary of the Site. Whitesboro Street terminates near the southern boundary of the Site. The City of Rome Department of Public Works facility is located to the east and southeast of the Site. Residential properties are located near the Site entrance on Kingsley Avenue.

The Site is relatively flat, with existing grades ranging from 430 to 442 feet above mean sea level. The primary surface water feature in the area is the Mohawk River, which discharges into the Barge Canal approximately 2,000 feet downstream toward the south. The groundwater flow direction in both the water table aquifer (near surface) and deep aquifer (within the overburden above the clay) is toward the south-southwest. Depth to groundwater generally ranges from 2 to 15 feet below ground surface at the Site.

1.3 Site History

The Kingsley Avenue MGP was constructed in 1917. Gas production began at the Site in 1917 and peaked in 1927. Manufactured gas was produced at the Site using the coal gas and water gas processes. Coal carbonization produced coal gas by heating coal in retorts or beehive ovens. The water gas process involved the passage of steam through burning coal. This formed a gaseous mixture that was passed through a super heater into which an oil feed stock was sprayed. In each process, the gas produced was condensed and purified prior to distribution. The production of manufactured gas created many by-products, some of which remain onsite. A dense, oily liquid known as coal tar condensed out of the gas at various stages during its production, purification, and distribution. Although much of the coal tar produced was reused, recovery of the coal tar waste was incomplete. Substantial amounts of coal tar leaked from storage and processing facilities, contaminating surface and subsurface soils, as well as groundwater. Another by-product includes the discarded lime and/or wood chips treated with iron oxides to remove cyanide and sulfur from the gas (known as purifier waste).

By 1930, production of gas at the Kingsley Avenue MGP was limited to emergency capacity, as the supply of gas for the City of Rome came from other facilities. Between 1938 and 1941, the retort house and relief holder were decommissioned. By 1949, gas manufacturing equipment had been removed from the central building. In 1959, the main gas holder was dismantled.

Environmental concerns at the Site caused NYSDEC and the United States Environmental Protection Agency (USEPA) to evaluate the need for investigation and remedial action. Regulators typically define a single site into a number of OUs. An OU, for technical or administrative reasons, can be addressed separately to eliminate or mitigate a release, threat of release, or exposure pathway resulting from the Site contamination. The lead agency, NYSDEC, defined OUs: OU-1 and OU-2. NYSDEC continues to administer the Site under a Consent Order with National Grid. OU-1 includes the former Kingsley Avenue MGP property, the surface soils



of a small contiguous area of undeveloped New York State-owned land along the Mohawk River, and sediments in a backwater area west of the Site. OU-2 includes an approximate 2-acre area between the National Grid property and the eastern shore of the Mohawk River. Additionally, OU-2 includes the area beneath the Mohawk River and property west of the Mohawk River to East Westboro Street. OU-2 encompasses approximately 20 acres of land. Refer to **Figure 2** for a depiction of OU-1 and OU-2.

This report is focused on OU-1. The following provides a general chronology of key events related to OU-1.

- 1987 – USEPA Preliminary Assessment
- 1992 – Preliminary Site Assessment/Interim Remedial Measures (IRM) Work Plan
- May 1994 – Concentrator House IRM
- July 1994 – Start of Remedial Investigation
- January 1995 – Purifier Disposal Area IRM
- July 1998 – Light non-aqueous phase liquid (LNAPL) Removal IRM initiated
- March 1999 – Remedial Investigation Report
- December 2001 – Offsite Remedial Investigation Report complete
- January 2002 – OU-1 Feasibility Study complete
- March 2002 – OU-1 Record of Decision (ROD) issued by NYSDEC
- August 2006 – Remedial Design approved
- August 2007 – Remedial Action started
- December 2010 – Remedial Action completed
- January 2011 – long-term groundwater and LNAPL and DNAPL monitoring commenced
- December 2011 – long-term groundwater extraction system OM&M commenced
- November 2012 – chemical treatment system for the extraction manhole completed

The remedial elements for OU-1 that have been completed include:

- Utility relocation.
- DNAPL and LNAPL source area soil removal and offsite thermal treatment/disposal.
- Purifier waste material removal and offsite disposal.
- River bank soil removal and offsite disposal.
- Demolition and offsite disposal of the MGP tar well and holder foundations.
- Installation of a sheet pile cutoff wall to contain and minimize offsite migration of DNAPL.
- Installation of a groundwater extraction trench with passive recovery pipe along the upgradient side of the wall. The trench includes a series of collection manholes/sumps. Submersible

pumps deliver untreated groundwater to a sanitary manhole under an existing City of Rome WPCF.

- Installation of a 14-acre soil cover in the northern portion of the Site.
- The two foot thick vegetative cover (clean soil above geotextile layer).
- Installation of eight DNAPL collection wells within known source areas.
- Installation of five groundwater monitoring wells along the extraction trench.
- Installation of 16 groundwater monitoring wells to monitor shallow and deep aquifers.
- Installation of five groundwater monitoring wells within the OU-2 area.
- An Environmental Easement has been placed on the property and is included with the final Site Management Plan.

Figure 3 presents the monitoring well locations for the western portion of the Site. **Figure 4** presents monitoring well locations for the eastern portion of the Site.

Following start-up of the groundwater extraction system, it became apparent that iron fouling would be an operational issue. Therefore, National Grid installed a chemical treatment system to help protect the groundwater wells, piping, and submersible pump associated with the groundwater extraction system. As part of the chemical treatment system, a weather-proof structure was installed adjacent to the groundwater pumping manhole and houses a chemical tote and chemical feed pump. An environmental friendly iron inhibitor (REDUX 340) is injected into the pumping manhole to protect the submersible pump, piping, and metering instruments. This chemical is used at similar National Grid sites across central and eastern New York State in order to minimize iron fouling and reduce operation and maintenance costs and has been approved by the City of Rome publicly owned treatment works (POTW). The chemical treatment system became operational in November 2012.

2 Operation, Maintenance, and Monitoring Activities

2.1 Quarterly Site Inspection

GES conducted the 2020 2nd quarter site inspection on June 11, 2020. Inspections are generally conducted in March, June, September, and December of each year. The Site inspection included the Site wells, security perimeter fence/gates, drainage system, vegetation, and the Site access road. In general, the Site was noted to be in compliance during the inspection. Refer to **Appendix A** for the Site Inspection Form.

There are 34 total site wells that were inspected as part of this event. **Figures 3** and **4** show the well locations. **Table 2** details each well in terms of horizontal location, vertical elevation, diameter, material, and screen elevation.

2.2 Quarterly Static Water Level Measurements

Quarterly static water level measurements were collected from the 34 wells on June 11 and 12, 2020. **Table 3** presents historical and recent static water level measurements. Refer to **Appendix B** for the field log sheet with water level measurements.

Prior to the construction of the barrier wall and groundwater extraction trench/system remedy, groundwater generally flowed northwesterly toward the Mohawk River. The remedy was designed and constructed to intercept that groundwater flow pattern and minimize migration of site-related DNAPL from the upgradient side of the barrier wall to the river. To ensure that the barrier wall meets the intent of the remedial action, it was agreed by NYSDEC and National Grid that the long-term compliance mechanism would be to compare the top of steel sheeting barrier wall (generally 435 to 437 feet above sea level) with the groundwater levels immediately upgradient of the barrier wall.

Eight manholes (MH-2, MH-3, MH-4, MH-5, MH-6, MH-6A, MH-7, and MH-8) and ten groundwater monitoring wells (DNAPL-2, DNAPL-3, DNAPL-4, DNAPL-5, DNAPL-6, VTW-1, VTW-2, VTW-3, VTW-4, and VTW-5) were constructed immediately upgradient of the barrier wall within the gravel extraction trench. The static water levels in each of the upgradient groundwater monitoring wells were measured and found to be between 425 and 431 (**Table 3**) feet above sea level since start-up of the groundwater extraction system. Groundwater does not overtop the barrier wall. **Figure 5** presents the groundwater levels compared to the barrier wall profile. Gauging data for all 34 wells and containment data for the 10 upgradient groundwater monitoring wells are presented in **Appendix B**.

2.3 Quarterly Groundwater Monitoring Event

The 2020 2nd quarter groundwater monitoring event was conducted on June 11 and 12, 2020. Sixteen groundwater monitoring wells were sampled (LTMW-D01, LTMW-S01, LTMW-D02, LTMW-S02, LTMW-D03, LTMW-S03, LTMW-D04, LTMW-S04, LTMW-D05, LTMW-S05, LTMW-D06, LTMW-S06, LTMW-S07, LTMW-S08, LTMW-S09, LTMW-S10).



The wells were sampled in accordance with USEPA Low-Flow Groundwater Sampling Procedures [1996]. Purge water was contained and subsequently discharged to the onsite groundwater extraction system which discharges water to the City of Rome WPCF. Field measurements (temperature, pH, oxidation-reduction potential, conductivity, turbidity, dissolved oxygen, and total dissolved solids) were recorded at each well during the sampling using a water quality meter and are presented in **Appendix C**.

In addition to the 16 water samples collected, four quality assurance/quality control (QA/QC) samples were collected, including one Matrix Spike sample, one Matrix Spike Duplicate sample, one field duplicate sample, and one trip blank sample. Twenty total samples were shipped on ice to the Pace Analytical Services, LLC (Pace) of Greensburg, Pennsylvania, for laboratory analysis. Analyses included: polycyclic aromatic hydrocarbons (PAHs) via USEPA Method 8270D; benzene, toluene, ethylbenzene, and total xylenes (BTEX) via USEPA Method 8260C; heavy metals via USEPA Method 200.7; and total cyanide via USEPA Method 335.4.

The analytical results included detections of BTEX, acenaphthene, benzo(a)anthracene, chrysene, cyanide, fluorene, and naphthalene, above the New York State regulatory maximum allowable limits. Analytical results at LTMW-S03 indicated zinc levels above the guidance value provided in NYSDEC's Technical and Operational Guidance Series section 1.1.1. Additionally the analytical results at LTMW-D04 indicated lead levels above the guidance values. A summary of laboratory analytical results is provided in **Table 4**. Of the 16 wells sampled, LTMW-D01, and LTMW-D03 had BTEX concentrations above the New York State Groundwater Ambient Water Quality Standards (AWQS). Results indicated no detections of any compound for LTMW-D02, LTMW-D05, LTMW-S07, and LTMW-S09.

The analytical data report was validated by GES. The primary objective of the data validation is to identify any questionable or invalid laboratory processes or data. The data validator reviewed the summary form information, the raw sample data, and a limited review of associated raw QC data. In summary, sample results are usable as reported. Qualifications are detailed in Table 1 of **Appendix D**, which presents the Data Usability Summary Report (DUSR) including the validated laboratory data.

2.4 Quarterly Light Non-Aqueous Phase Liquid and Dense Non-Aqueous Phase Liquid Monitoring/Collection Event

Each of the 34 wells was monitored for LNAPL and DNAPL in June for this quarter. The gauging data for these events are presented in **Appendix B**. This activity is conducted in conjunction with the collection of static water level measurements. A probe is lowered to the water level in the well and inspected for LNAPL. The probe is then lowered to the bottom of the well and inspected for DNAPL. If LNAPL or DNAPL is discovered in measurable quantities, product is removed from the well using a submersible pump. The removed product/water mixture is subsequently containerized in a properly labeled NYSDOT-approved 55-gallon drum for future offsite disposal. DNAPL in measurable quantities was noted in four site wells: DNAPL-03, MW-OU2-1, MW-OU2-2 and MW-OU2-4.



As part of the NAPL monitoring/collection event, a total of 8 gallons of DNAPL were collected (3 gallons from MW-OU2-1, 4 gallons from MW-OU2-4, and 1 gallon from DNAPL-03) during this quarter.

Since the start of the NAPL monitoring/collection program, a total of 548 gallons of DNAPL have been removed for offsite disposal. Zero gallons of LNAPL have been detected/recovered.

2.5 Quarterly Groundwater Extraction System Discharge Sampling Event

Under an existing City of Rome WPCF discharge permit, quarterly sampling, analysis, and reporting of the groundwater extraction system discharge to the local sewer system is required. A water sample was collected on June 11, 2020, and analyzed by Pace for the permit-specified parameters. No detections above permit limits were noted. **Table 5** provides the analytical results compared to the permit limits.

The analytical data report was validated by GES. The primary objective of the data validation is to identify any questionable or invalid laboratory processes or data. The validator reviewed the summary form information, the raw sample data, and a limited review of associated raw QC data. The review stated that field sample analyte values/reporting limits were usable as reported. The laboratory result for pH is always considered estimated as the EPA recommended short hold time of 15 minutes can only be met by in-field measurements. Qualifications are detailed in Table 1 of **Appendix D**, which presents the Data Usability Summary Report (DUSR) including the validated laboratory data.

2.6 Groundwater Extraction System Discharge Flow and Operation, Maintenance, and Monitoring

The groundwater extraction system consists of a gravel trench, a pumping manhole, dual submersible pumps, and below ground piping. The piping enters the onsite groundwater treatment building where flow measurements, discharge sampling, pressure measurements, and other OM&M activities can be conducted. The piping then continues below ground from the nearby sanitary sewer manhole to the City of Rome WPCF.

A mechanical flow meter is located within the Site building and serves as the recording device for the City of Rome WPCF discharge fees. During the 2020 2nd quarter, approximately 3,513,675 gallons (average flow ~ 28.5 gpm) were discharged. Since the groundwater extraction system was installed, approximately 162 million gallons have been discharged. Below is a summary table for the groundwater extraction system discharge flow:



Table 1 – Groundwater Extraction System Discharge Flow

Time Period	Discharge Flow (gallons)
2010	11,600,000
2011	14,400,000
2012	19,900,000
2013	19,500,000
2014	16,500,000
2015	16,686,700
2016	13,695,010
2017	13,874,930
2018	13,208,189
2019	15,989,356
2020 1 st Quarter	3,775,177
2020 2 nd Quarter	3,513,675
TOTAL	162,643,037

The previous consultant conducted an evaluation of the groundwater extraction system, including inspections of the extraction manhole, submersible pumps, valving/controls, and clean-outs. Iron fouling throughout the system, particularly scaling on the submersible pumps, piping, and metering instruments, had been observed. As such, a chemical scale inhibitor (Redux 340) system, which applies the Redux 340 at the groundwater extraction manhole/submersible pumps, was installed and became operational in November 2012. A heating element located at the pumping manhole was installed in June 2012. Electrical power and building lighting/heating was installed in August/September 2012. Information regarding the environmentally-friendly, iron scale inhibitor was previously provided to the City of Rome POTW. The groundwater treatment system (including pumping station, conveyance piping, and flow meters) was cleaned (water lancing) during September 2012 in order to remove iron scale build-up in advance of the chemical treatment system installation.

2.7 Vegetation Management and Snow Removal

Vegetation management and snow removal activities were conducted during the 2nd quarter 2020 as needed.

3 Conclusions, Recommendations, and Certifications

3.1 Conclusions

Based on data collected from the 2020 2nd quarter OM&M activities, the following conclusions were made:

- Overall, the site is in regulatory compliance. Vegetation maintenance and snow removal was conducted as needed during 2nd quarter 2020.
- Quarterly static water level measurements were collected at ten groundwater monitoring wells upgradient of the steel sheeting barrier within the gravel extraction trench. The static water levels of the upgradient wells (ranging between 425 to 429 feet above sea level) did not overtop the barrier wall (top of wall ranges between 435 to 437 feet above sea level).
- Site groundwater contained detectable concentrations of BTEX, acenaphthene, benzo(a)anthracene, chrysene, cyanide, fluorene, and naphthalene above the New York State regulatory maximum allowable limits. Additionally, analytical results for well LTMW-S03 indicated zinc, and LTMW-D04 indicated lead concentrations above the NYSDEC AWQS guidance values. Seven of the 16 wells (LTMW-D01, LTMW-S01, LTMW-D03, LTMW-S03, LTMW-S04, LTMW-S08, and LTMW-S10) sampled had at least one detection of a site-related constituent above the New York State limits.
- The total quarterly volume of DNAPL collected (8 gallons) was removed from three wells (MW-OU2-1, MW-OU2-4, and DNAPL-03). 549 gallons of DNAPL have been removed from the site wells since the inception of the program. LNAPL has not been observed in any site wells to date.
- The groundwater extraction system operated continuously at an average flow rate of approximately 28.5 gpm, and a quarterly total of 3,513,675 gallons were discharged to the local sanitary sewer in accordance with the City of Rome WPCF discharge permit. A quarterly effluent water sample was collected and analyzed. There were no permit limit exceedances. Since December 2011, approximately 162 million gallons of water have been discharged without any permit limit exceedances.


3.2 Recommendations

It is recommended that all OM&M activities continue.

3.3 Certifications

I certify the following:

- The inspection of the Site to confirm the effectiveness of the institutional and engineering controls required by the remedial program was performed under my direction;
- The institutional controls and engineering controls employed at this site are unchanged from the date the controls were put in place, or last approved by the Department;
- Nothing has occurred that would impair the ability of the controls to protect the public health and environment;
- Nothing has occurred that would constitute a violation or failure to comply with any SMP for this control;
- Access to the Site will continue to be provided to the Department to evaluate the remedy, including access to evaluate the continued maintenance of the controls;
- Use of the Site is compliant with the Declarations of Covenants and Restrictions;
- The engineering control systems are performing as designed and are effective;
- To the best of my knowledge and belief, the work and conclusions described in this certification are in accordance with the requirements of the Site remedial program; and
- The information presented in this report is accurate and complete.

Signature 


Name: Gerald H. Cresap, P.E.
Title: Director of Engineering
Company: Groundwater & Environmental Services, Inc.

8-28-2020
Date





Figures

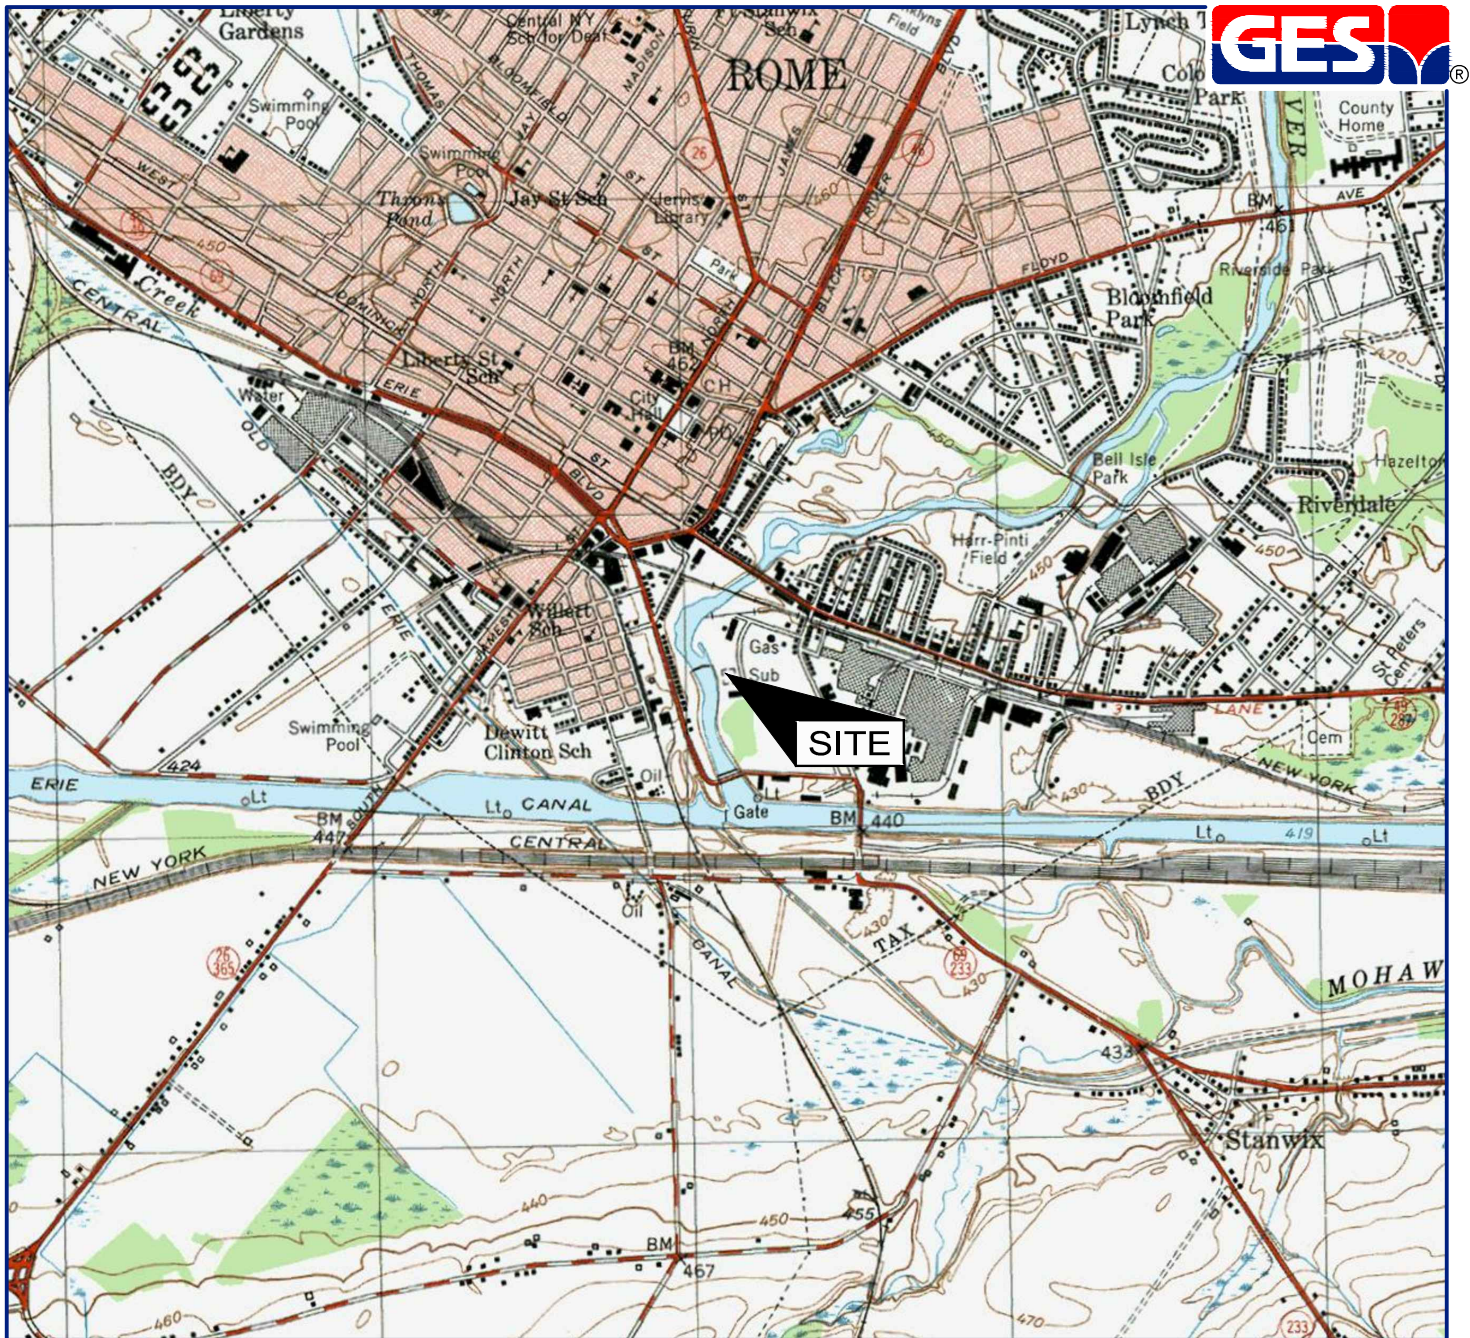

SOURCE: USGS 7.5 MINUTE SERIES
TOPOGRAPHIC QUADRANGLE 1955
ROME, NEW YORK
CONTOUR INTERVAL = 10'




QUADRANGLE LOCATION

DRAFTED BY:
W.G.S.

CHECKED BY:

REVIEWED BY:



SITE LOCATION MAP

**NATIONAL GRID
KINGSLEY AVENUE
ROME, NEW YORK**

Groundwater & Environmental Services, Inc.
5 TECHNOLOGY PLACE, SUITE 4, EAST SYRACUSE, NY 13057

SCALE IN FEET




DATE

10-17-16


FIGURE

1

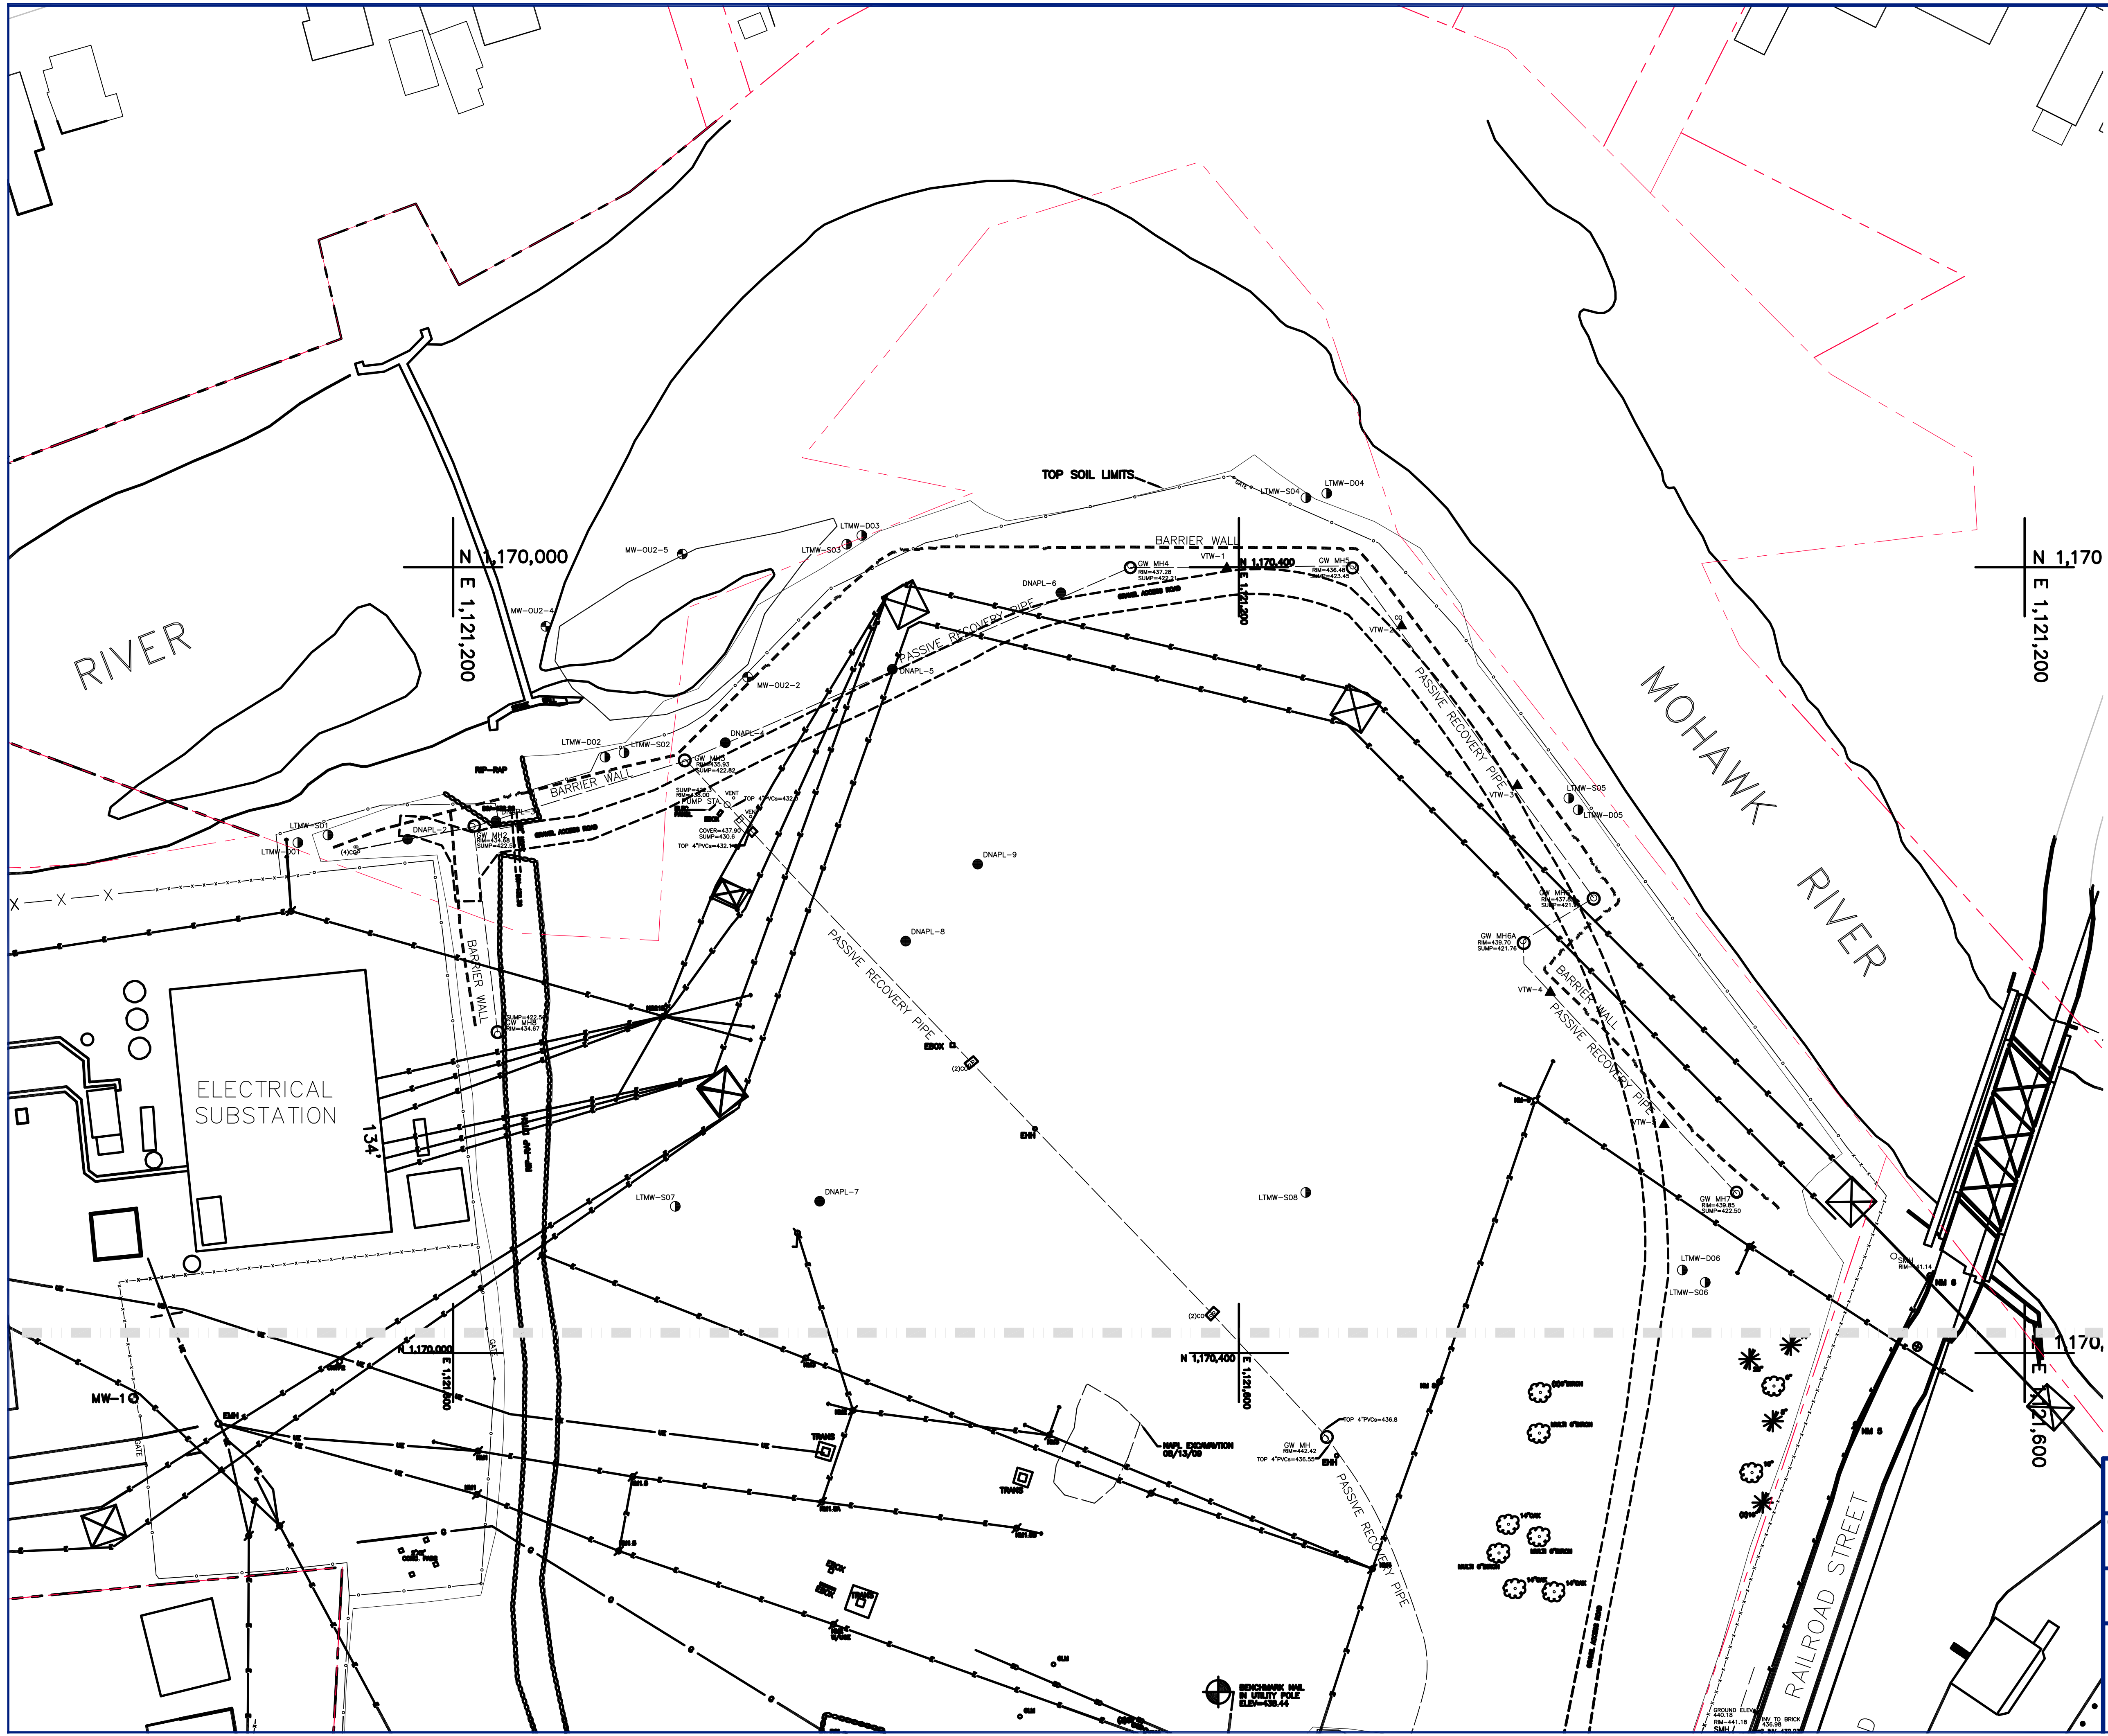



- LEGEND
- PROPERTY BOUNDARY
 - EAST WEST DIVIDE
 - FENCE
 - UTILITY POLE
 - UNDERGROUND ELECTRIC LINE
 - UNDERGROUND GAS LINE
 - OVERHEAD ELECTRIC
 - ELECTRICAL CONDUIT
 - UNDERGROUND WATER LINE
 - LTMW-D01
 - VTW-1
 - MW-OU2-1

WELL	NORTHING	EASTING	CASING	PVC	GROUND
LTMW-S01	1169936.2970	1121336.3233	435.52	435.10	433.2
LTMW-D01	1169920.9810	1121340.1793	434.90	434.80	432.7
LTMW-S02	1170087.0350	1121294.4073	436.79	436.59	434.3
LTMW-D02	1170077.3450	1121296.6553	436.74	436.60	434.2
LTMW-S03	1170200.4014	1121188.2719	431.43	431.29	429.3
LTMW-D03	1170208.0726	1121183.8138	431.27	431.13	429.2
LTMW-S04	1170434.1910	1121184.5883	437.24	437.09	435.6
LTMW-D04	1170444.1690	1121182.3583	437.18	436.88	434.9
LTMW-S05	1170567.9900	1121317.5703	437.92	437.77	435.9
LTMW-D05	1170572.7400	1121323.4973	437.78	437.58	435.7
LTMW-S06	1170637.4230	1121564.0283	441.64	441.52	439.7
LTMW-D06	1170625.7620	1121557.7643	441.70	441.55	440.2
LTMW-S07	1170113.1090	1121525.3273	439.94	439.70	438.0
LTMW-D08	1170434.0830	1121518.2593	443.81	443.63	442.4
LTMW-S09	1170469.4300	1121969.1733	439.78	439.54	437.6
LTMW-D10	1170123.6800	1121817.1213	439.67	439.42	437.4
DNAPL-2	1169976.8400	1121338.4483	436.81	no pipe	434.6
DNAPL-3	1170021.7760	1121329.2613	437.23	no pipe	434.6
DNAPL-4	1170138.5720	1121289.3033	438.50	no pipe	436.3
DNAPL-5	1170223.6230	1121251.9083	440.60	no pipe	438.4
DNAPL-6	1170309.3920	1121212.9643	439.71	no pipe	438.0
DNAPL-7	1170186.6060	1121522.7453	441.46	no pipe	439.4
DNAPL-8	1170230.3820	1121390.3173	441.80	no pipe	439.6
DNAPL-9	1170267.0450	1121351.1333	442.63	no pipe	440.1
MW-OU2-1	1169964.4870	1121322.8873	435.72	435.48	433.5
MW-OU2-2	1170149.8980	1121255.9363	436.40	436.06	433.9
MW-OU2-3					
MW-OU2-4	1170047.2131	1121230.1096			
MW-OU2-5	1170116.6727	1121193.2720			
VTW-1	1170393.9230	1121200.2643	439.74	no pipe	437.7
VTW-2	1170482.8870	1121229.5033	438.33	no pipe	436.1
VTW-3	1170541.8140	1121311.1743	439.44	no pipe	437.1
VTW-4	1170558.5060	1121416.3693	441.59	no pipe	439.3
VTW-5	1170616.4890	1121483.6873	441.79	no pipe	439.8

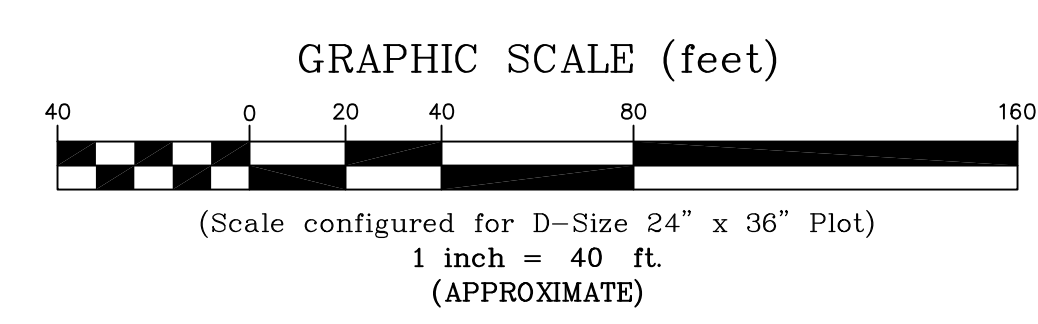

DRAFTED BY: W.G.S.	SITE MAP-WEST	
CHECKED BY:	NATIONAL GRID KINGSLEY AVENUE ROME, NEW YORK	
REVIEWED BY:	Groundwater & Environmental Services, Inc. 5 TECHNOLOGY PLACE, SUITE 4, EAST SYRACUSE, NY 13057	
NORTH	DATE 10-27-16	FIGURE 3

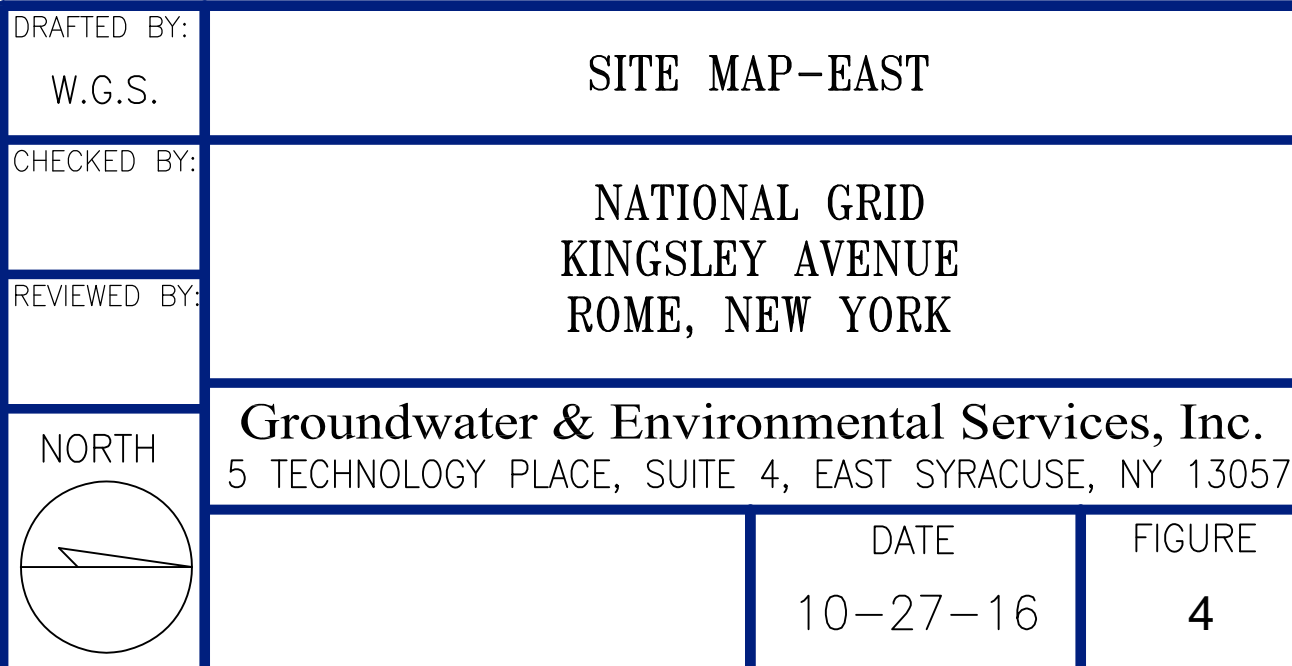

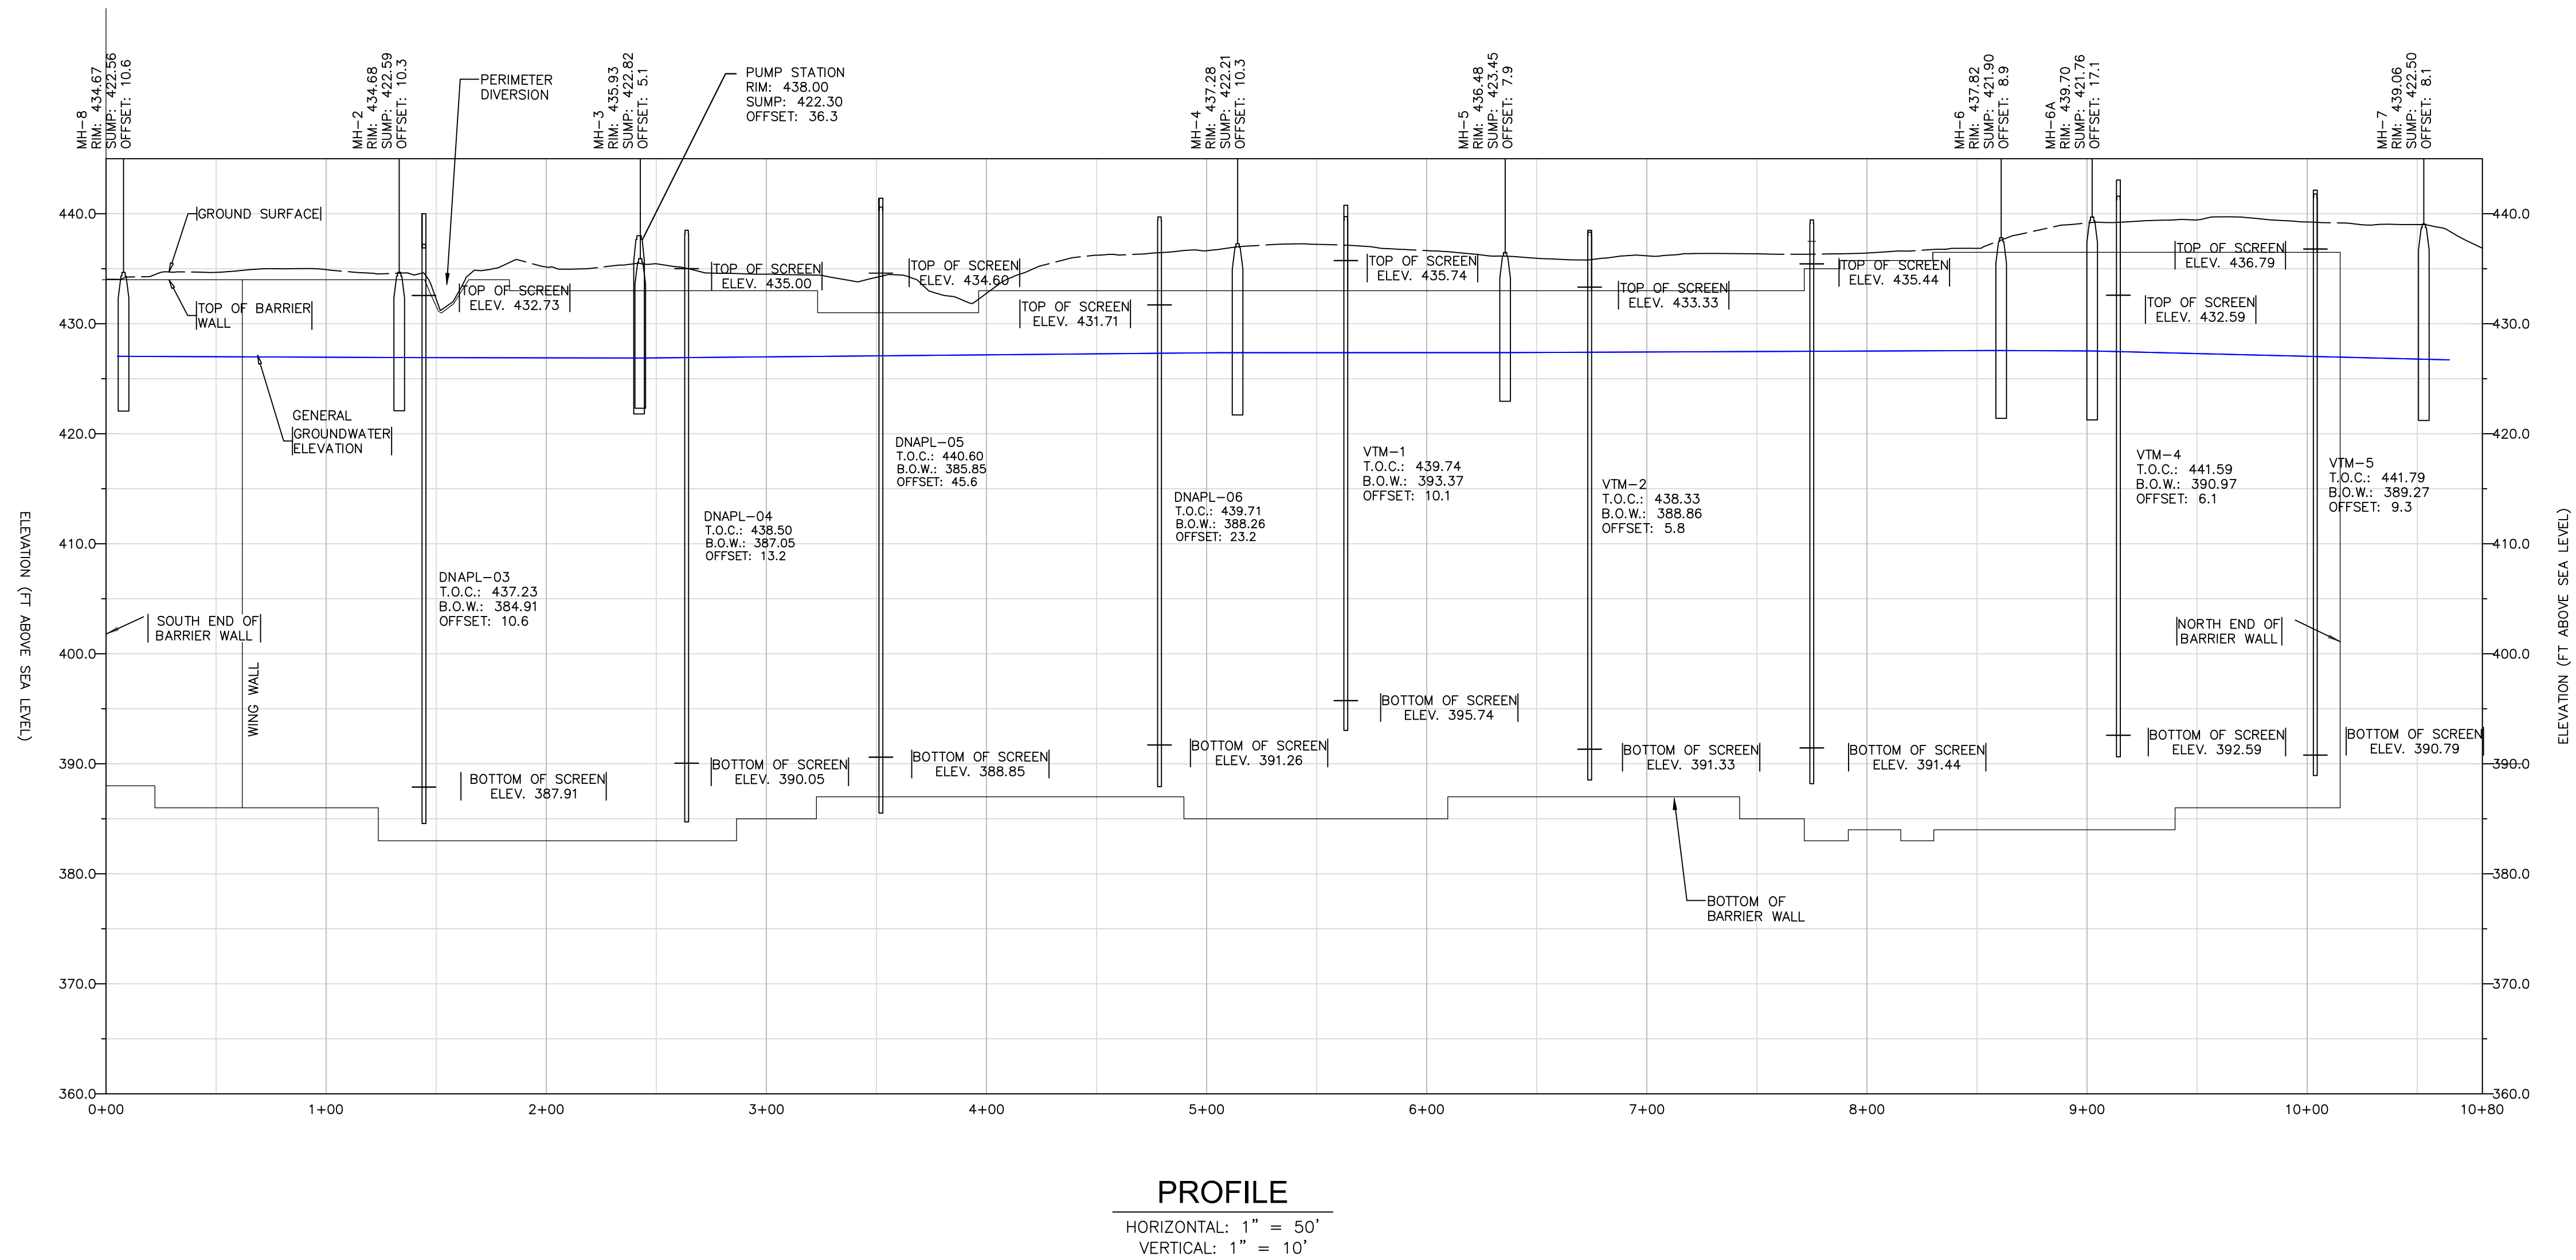

LEGEND

- T.O.C. TOP OF CASING
B.O.W. BOTTOM OF WELL
TOP OF WALL
GROUNDWATER ELEVATION (JUNE 2012)

NOTES:

1. THE DEPTH OF THE BARRIER WALL IS APPROXIMATELY 50 FEET.
2. GROUNDWATER ELEVATION MEASUREMENTS TAKEN JUNE 2012.

DRAFTED BY: W.G.S.	BARRIER WALL PROFILE		
CHECKED BY:	NATIONAL GRID KINGSLEY AVENUE ROME, NEW YORK		
REVIEWED BY:			
NORTH 	Groundwater & Environmental Services, Inc. 300 GATEWAY PARK DRIVE, NORTH SYRACUSE, NY 13212		
		DATE 10-17-16	FIGURE 5



Tables

Table 2
Site Monitoring Wells

Well ID	Northing	Easting	Elevation of Ground	Elevation Top of Outer Casing	Elevation Top of Inner Casing	Nominal Well Diameter (inches)	Well Material	Well Sump Depth (ft)	Depth to Bottom of Well (ft)	Elevation Bottom of Well	Depth to Top Screen (ft)	Elevation Top Screen	Depth to Bottom Screen (ft)	Elevation Bottom Screen	Action
MW-OU2-1	1169964.4870	1121322.8873	433.5	435.72	435.48	4	SS	3.0	46.12	389.36	33.0	402.48	43.0	392.48	Quarterly Inspection; Quarterly Static Water Level Measurement
MW-OU2-2	1170149.8980	1121255.9363	433.9	436.40	436.06	4	SS	3.0	49.60	386.46	39.0	397.06	49.0	387.06	Quarterly Inspection; Quarterly Static Water Level Measurement
MW-OU2-3	1170101.2208	1121177.4485	430.63	433.25	432.96	4	SS	3.0	35.15	397.81	31.0	401.96	41.0	391.96	Quarterly Inspection; Quarterly Static Water Level Measurement (Surveyed in January 2014)
MW-OU2-4	1170149.6326	1121136.1811	430.63	433.05	432.88	4	SS	3.0	38.85	394.03	31.0	401.88	41.0	391.88	Quarterly Inspection; Quarterly Static Water Level Measurement (Surveyed in January 2014)
MW-OU2-5	1170167.9650	1121091.2658	431.23	433.77	433.46	4	SS	3.0	36.34	397.12	31.0	402.46	41.0	392.46	Quarterly Inspection; Quarterly Static Water Level Measurement (Surveyed in January 2014)
DNAPL-02	1169976.8400	1121338.4483	434.6	436.81	NA	6	SS	3.0	50.40	386.41	4.0	432.81	46.0	389.41	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-03	1170021.7760	1121329.2613	434.6	437.23	NA	6	SS	3.0	52.32	384.91	4.5	432.73	46.5	387.91	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-04	1170138.5720	1121289.3033	436.3	438.50	NA	6	SS	3.0	51.45	387.05	3.5	435.00	47.5	390.05	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-05	1170223.6230	1121251.9083	438.4	440.60	NA	6	SS	3.0	54.75	385.85	6.0	434.60	50.0	388.85	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-06	1170309.3920	1121212.9643	438	439.71	NA	6	SS	3.0	51.45	388.26	8.0	431.71	48.0	391.26	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-07	1170186.6060	1121522.7453	439.4	441.46	NA	6	SS	3.0	53.60	387.86	5.0	436.46	55.5	390.86	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-08	1170230.3820	1121390.3173	439.6	441.80	NA	6	SS	3.0	58.01	383.79	7.0	434.80	53.0	386.79	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-09	1170267.0450	1121351.1333	440.1	442.63	NA	6	SS	3.0	57.58	385.05	5.0	437.63	53.2	388.05	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
VTM-1	1170393.9230	1121200.2643	437.7	439.74	NA	6	SS	NA	46.37	393.37	4.0	435.74	44.0	395.74	Quarterly Inspection; Quarterly Static Water Level Measurement
VTM-2	1170482.8870	1121229.5033	436.1	438.33	NA	6	SS	NA	49.47	388.86	5.0	433.33	47.0	391.33	Quarterly Inspection; Quarterly Static Water Level Measurement
VTM-3	1170541.8140	1121311.1743	437.1	439.44	NA	6	SS	NA	50.91	388.53	4.0	435.44	48.0	391.44	Quarterly Inspection; Quarterly Static Water Level Measurement
VTM-4	1170558.5060	1121416.3693	439.3	441.59	NA	6	SS	NA	50.62	390.97	9.0	432.59	49.0	392.59	Quarterly Inspection; Quarterly Static Water Level Measurement
VTM-5	1170616.4890	1121483.6873	439.8	441.79	NA	6	SS	NA	52.52	389.27	5.0	436.79	51.0	390.79	Quarterly Inspection; Quarterly Static Water Level Measurement
LTMW-D01	1169920.9810	1121340.1793	432.7	434.90	434.80	2	PVC	NA	46.84	387.96	34.0	400.80	44.0	390.80	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S01	1169936.2970	1121336.3233	433.2	435.52	435.10	2	PVC	NA	16.92	418.18	5.0	430.10	15.0	420.10	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-D02	1170077.3450	1121296.6853	434.2	436.74	436.60	2	PVC	NA	40.29	396.31	30.0	406.60	40.0	396.60	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S02	1170087.0350	1121294.4073	434.3	436.79	436.59	2	PVC	NA	17.98	418.61	5.0	431.59	15.0	421.59	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-D03	1170208.0726	1121183.8138	429.2	431.27	431.13	2	PVC	NA	40.73	390.40	29.0	402.13	39.0	392.13	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S03	1170200.4014	1121188.2719	429.3	431.43	431.29	2	PVC	NA	13.70	417.59	2.0	429.29	12.0	419.29	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-D04	1170444.7690	1121162.3583	434.9	437.18	436.88	2	PVC	NA	46.36	390.52	34.0	402.88	44.0	392.88	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S04	1170434.1910	1121164.5883	435.6	437.24	437.09	2	PVC	NA	17.26	419.83	5.0	432.09	15.0	422.09	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-D05	1170572.7400	1121323.4973	435.7	437.78	437.58	2	PVC	NA	46.53	391.05	35.0	402.58	45.0	392.58	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S05	1170567.9900	1121317.5703	435.9	437.92	437.77	2	PVC	NA	16.83	420.94	5.0	432.77	15.0	422.77	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-D06	1170625.7620	1121557.7643	440.2	441.70	441.55	2	PVC	NA	52.22	389.33	40.0	401.55	50.0	391.55	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S06	1170637.4230	1121564.0263	439.7	441.64	441.52	2	PVC	NA	17.60	423.92	5.0	436.52	15.0	426.52	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S07	1170113.1090	1121525.3273	438	439.94	439.70	2	PVC	NA	17.82	421.88	5.0	434.70	15.0	424.70	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S08	1170434.0830	1121518.2593	442.4	443.81	443.63	2	PVC	NA	17.39	426.24	5.0	438.63	15.0	428.63	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S09	1170469.4300	1121969.1733	437.6	439.79	439.54	2	PVC	NA	16.92	422.62	5.0	434.54	15.0	424.54	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S10	1170123.6800	1121817.1213	437.4	439.67	439.42	2	PVC	NA	17.18	422.24	5.0	434.42	15.0	424.42	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling

Notes:

- 1) Shallow monitoring wells were sampled with a low flow peristaltic pump with battery ps
- 2) Deep monitoring wells were sampled with a low flow submersible pump with genera
- 3) Static water level measurements were taken from top of inner casing. If the well has no inner casing, the measurement will be taken from the top of outer casing

Table 3
Historical Groundwater Data
Operable Unit 2 Wells

Well			Well			Well			Well			Well		
MW-OU2-1			MW-OU2-2			MW-OU2-3			MW-OU2-4			MW-OU2-5		
TOC = 435.72			TOC = 436.40			TOC = 432.96			TOC = 432.88			TOC = 433.46		
Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.
06/11/20	10.06	425.66	06/11/20	10.82	425.58	06/11/20	7.10	425.86	06/11/20	7.10	425.78	06/11/20	7.75	425.71
03/20/20	8.10	427.62	03/20/20	9.25	427.15	03/20/20	6.40	426.56	03/20/20	5.40	427.48	03/20/20	6.05	427.41
12/05/19	9.20	426.52	12/05/19	10.10	426.30	12/05/19	6.70	426.26	12/05/19	6.68	426.20	12/05/19	7.37	426.09
09/19/19	9.54	426.18	09/19/19	10.90	425.50	09/19/19	6.95	426.01	09/19/19	6.90	425.98	09/19/19	7.60	425.86
06/06/19	8.90	426.82	06/06/19	9.60	426.80	06/06/19	6.18	426.78	06/06/19	6.05	426.83	06/06/19	6.23	427.23
03/21/19	8.65	427.07	03/21/19	9.80	426.60	03/21/19	6.00	426.96	03/21/19	5.90	426.98	03/21/19	6.50	426.96
12/05/18	8.90	426.82	12/05/18	9.05	427.35	12/05/18	5.69	427.27	12/05/18	5.60	427.28	12/05/18	6.25	427.21
09/13/18	9.58	426.14	09/13/18	10.40	426.00	09/13/18	7.02	425.94	09/13/18	7.06	425.82	09/13/18	7.72	425.74
06/07/18	9.53	426.19	06/07/18	10.25	426.15	06/07/18	7.90	425.06	06/07/18	6.90	425.98	06/07/18	7.56	425.90
03/22/18	9.15	426.57	03/22/18	9.85	426.55	03/22/18	6.60	426.36	03/22/18	6.55	426.33	03/22/18	7.20	426.26
12/06/17	9.37	426.35	12/06/17	9.96	426.44	12/06/17	6.60	426.36	12/06/17	6.50	426.38	12/06/17	7.20	426.26
09/01/17	9.53	426.19	09/01/17	10.35	426.05	09/01/17	NM	-	09/01/17	6.98	425.90	09/01/17	7.73	425.73
06/23/17	9.35	426.37	06/23/17	10.02	426.38	06/23/17	7.10	425.86	06/23/17	6.70	426.18	06/23/17	7.15	426.31
03/08/17	8.68	427.04	03/08/17	5.94	430.46	03/08/17	5.93	427.03	03/08/17	5.94	426.94	03/08/17	6.62	426.84
12/15/16	8.91	426.81	12/15/16	9.80	426.60	12/15/16	6.42	426.54	12/15/16	6.35	426.53	12/15/16	7.02	426.44
09/19/16	9.58	426.14	09/19/16	10.52	425.88	09/19/16	7.29	425.67	09/19/16	7.15	425.73	09/19/16	7.84	425.62
06/07/16	9.45	426.27	06/07/16	10.28	426.12	06/07/16	6.95	426.01	06/07/16	6.87	426.01	06/07/16	7.57	425.89
03/07/16	8.45	427.27	03/07/16	9.28	427.12	03/07/16	5.91	427.05	03/07/16	5.82	427.06	03/07/16	6.49	426.97
12/02/15	9.30	426.42	12/02/15	10.19	426.21	12/02/15	6.85	426.11	12/02/15	6.77	426.11	12/02/15	7.44	426.02
09/16/15	9.66	426.06	09/16/15	10.47	425.93	09/16/15	7.15	425.81	09/16/15	7.05	425.83	09/16/15	7.74	425.72
06/03/15	9.34	426.38	06/03/15	9.73	426.67	06/03/15	6.41	426.55	06/03/15	6.34	426.54	06/03/15	6.95	426.51
04/08/15	8.63	427.09	04/08/15	9.29	427.11	04/08/15	6.14	426.82	04/08/15	5.96	426.92	04/08/15	6.98	426.48
12/01/14	9.32	426.40	12/01/14	9.84	426.56	12/01/14	6.49	426.47	12/01/14	6.41	426.47	12/01/14	7.08	426.38
09/10/14	9.49	426.23	09/10/14	9.89	426.51	09/10/14	7.02	425.94	09/10/14	6.95	425.93	09/10/14	7.63	425.83
06/12/14	9.58	426.14	06/12/14	10.33	426.07	06/12/14	6.99	425.97	06/12/14	6.94	425.94	06/12/14	7.63	425.83
03/25/14	9.12	426.60	03/25/14	10.22	426.18	03/25/14	6.75	426.21	03/25/14	6.85	426.03	03/25/14	7.24	426.22
12/12/13	8.47	427.25	12/12/13	9.35	427.05	12/12/13	5.92	427.04	12/12/13	5.84	427.04	12/12/13	6.51	426.95
09/23/13	9.52	426.20	09/23/13	10.32	426.08	09/23/13	7.08	425.88	09/23/13	6.98	425.90	09/23/13	7.63	425.83
06/10/13	8.46	427.26	06/10/13	9.32	427.08	06/10/13	5.78	427.18	06/10/13	5.68	427.20	06/10/13	5.35	428.11
03/27/13	9.30	426.42	03/27/13	10.11	426.29	03/27/13	6.78	426.18	03/27/13	6.95	425.93	03/27/13	7.42	426.04
12/03/12	9.49	426.23	12/03/12	10.33	426.07	12/03/12	7.02	425.94	12/03/12	6.93	425.95	12/03/12	7.70	425.76
09/12/12	9.75	425.97	09/12/12	10.63	425.77	09/12/12	7.32	425.64	09/12/12	7.25	425.63	09/12/12	8.02	425.44
06/18/12	9.51	426.21	06/18/12	10.36	426.04	06/18/12	7.05	425.91	06/18/12	6.95	425.93	06/18/12	7.69	425.77
03/19/12	8.88	426.84	03/19/12	9.79	426.61	03/19/12	6.46	426.50	03/19/12	6.32	426.56	03/19/12	7.13	426.33
12/05/11	9.10	426.62	12/05/11	9.84	426.56	12/05/11	6.72	426.24	12/05/11	6.73	426.15	12/05/11	7.50	425.96
09/26/11	9.31	426.41	09/26/11	10.11	426.29	09/26/11	6.64	426.32	09/26/11	6.68	426.20	09/26/11	7.35	426.11
06/13/11	9.29	426.43	06/13/11	10.07	426.33	06/13/11	6.71	426.25	06/13/11	7.87	425.01	06/13/11	7.33	426.13
03/29/11	8.64	427.08	03/29/11	9.43	426.97	03/29/11	6.04	426.92	03/29/11	5.93	426.95	03/29/11	6.68	426.78

Notes:

TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
El. = Elevation in Feet

Table 3
Historical Groundwater Data
DNAPL Wells

Well	DNAPL-02 TOC = 436.81		Well	DNAPL-03 TOC = 437.23		Well	DNAPL-04 TOC = 438.50		Well	DNAPL-05 TOC = 440.60	
	Date	DTW	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.
06/11/20	10.06	426.75	06/11/20	10.29	426.94	06/11/20	11.67	426.83	06/11/20	13.76	426.84
03/20/20	8.10	428.71	03/20/20	8.55	428.68	03/20/20	9.70	428.80	03/20/20	11.32	429.28
12/05/19	9.20	427.61	12/05/19	9.60	427.63	12/05/19	10.85	427.65	12/05/19	12.92	427.68
09/19/19	9.54	427.27	09/19/19	8.85	428.38	09/19/19	11.14	427.36	09/19/19	13.20	427.40
06/06/19	9.10	427.71	06/06/19	9.25	427.98	06/06/19	10.60	427.90	06/06/19	12.70	427.90
03/21/19	8.20	428.61	03/21/19	8.45	428.78	03/21/19	9.70	428.80	03/21/19	11.80	428.80
12/05/18	8.10	428.71	12/05/18	8.70	428.53	12/05/18	9.65	428.85	12/05/18	11.75	428.85
09/13/18	9.60	427.21	09/13/18	9.70	427.53	09/13/18	11.00	427.50	09/13/18	13.08	427.52
06/07/18	9.70	427.11	06/07/18	10.00	427.23	06/07/18	11.26	427.24	06/07/18	13.34	427.26
03/22/18	9.35	427.46	03/22/18	9.60	427.63	03/22/18	10.90	427.60	03/22/18	12.99	427.61
12/06/17	9.00	427.81	12/06/17	9.31	427.92	12/06/17	10.59	427.91	12/06/17	12.65	427.95
09/01/17	9.75	427.06	09/01/17	10.00	427.23	09/01/17	11.36	427.14	09/01/17	13.44	427.16
06/23/17	9.30	427.51	06/23/17	9.56	427.67	06/23/17	10.90	427.60	06/23/17	13.00	427.60
03/08/17	8.92	427.89	03/08/17	9.19	428.04	03/08/17	10.51	427.99	03/08/17	12.57	428.03
12/15/16	8.33	428.48	12/15/16	8.60	428.63	12/15/16	9.89	428.61	12/15/16	11.98	428.62
09/19/16	9.56	427.25	09/19/16	9.88	427.35	09/19/16	11.20	427.30	09/19/16	13.27	427.33
06/07/16	9.41	427.40	06/07/16	9.73	427.50	06/07/16	11.05	427.45	06/07/16	13.12	427.48
03/07/16	8.45	428.36	03/07/16	8.73	428.50	03/07/16	10.05	428.45	03/07/16	12.10	428.50
12/02/15	9.41	427.40	12/02/15	9.71	427.52	12/02/15	11.01	427.49	12/02/15	13.09	427.51
09/16/15	9.91	426.90	09/16/15	10.21	427.02	09/16/15	11.51	426.99	09/16/15	13.58	427.02
06/03/15	8.33	428.48	06/03/15	8.84	428.39	06/03/15	10.15	428.35	06/03/15	12.24	428.36
04/08/15	8.39	428.42	04/08/15	8.68	428.55	04/08/15	9.96	428.54	04/08/15	12.07	428.53
12/01/14	9.16	427.65	12/01/14	9.45	427.78	12/01/14	10.75	427.75	12/01/14	12.81	427.79
09/10/14	9.25	427.56	09/10/14	9.55	427.68	09/10/14	10.62	427.88	09/10/14	12.70	427.90
06/12/14	9.90	426.91	06/12/14	10.20	427.03	06/12/14	11.41	427.09	06/12/14	13.56	427.04
03/25/14	9.52	427.29	03/25/14	9.81	427.42	03/25/14	11.15	427.35	03/25/14	13.21	427.39
12/12/13	8.71	428.10	12/12/13	9.03	428.20	12/12/13	10.35	428.15	12/12/13	12.41	428.19
09/23/13	9.92	426.89	09/23/13	10.25	426.98	09/23/13	11.56	426.94	09/23/13	13.61	426.99
06/10/13	8.27	428.54	06/10/13	8.62	428.61	06/10/13	9.91	428.59	06/10/13	11.98	428.62
03/27/13	9.51	427.30	03/27/13	9.81	427.42	03/27/13	11.15	427.35	03/27/13	13.21	427.39
12/03/12	9.19	427.62	12/03/12	10.10	427.13	12/03/12	11.45	427.05	12/03/12	13.48	427.12
09/12/12	10.14	426.67	09/12/12	10.48	426.75	09/12/12	11.81	426.69	09/12/12	13.84	426.76
06/18/12	9.46	427.35	06/18/12	9.80	427.43	06/18/12	11.15	427.35	06/18/12	13.24	427.36
03/19/12	9.02	427.79	03/19/12	9.35	427.88	03/19/12	10.69	427.81	03/19/12	12.74	427.86
12/05/11	9.46	427.35	12/05/11	9.79	427.44	12/05/11	11.13	427.37	12/05/11	13.30	427.30
09/26/11	9.36	427.45	09/26/11	9.70	427.53	09/26/11	11.09	427.41	09/26/11	13.08	427.52
06/13/11	9.18	427.63	06/13/11	9.54	427.69	06/13/11	10.84	427.66	06/13/11	12.89	427.71
03/29/11	8.41	428.40	03/29/11	8.72	428.51	03/29/11	10.05	428.45	03/29/11	12.11	428.49

Notes:

TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
El. = Elevation in Feet



Table 3
Historical Groundwater Data
DNAPL Wells

Well	DNAPL-06 TOC = 439.71		Well	DNAPL-07 TOC = 441.46		Well	DNAPL-08 TOC = 441.80		Well	DNAPL-09 TOC = 442.63	
	Date	DTW	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.
06/11/20	12.73	426.98	06/11/20	13.36	428.10	06/11/20	13.85	427.95	06/11/20	14.73	427.90
03/20/20	10.90	428.81	03/20/20	11.80	429.66	03/20/20	12.10	429.70	03/20/20	13.05	429.58
12/05/19	11.96	427.75	12/05/19	12.81	428.65	12/05/19	13.25	428.55	12/05/19	14.15	428.48
09/19/19	12.27	427.44	09/19/19	13.14	428.32	09/19/19	13.58	428.22	09/19/19	14.50	428.13
06/06/19	6.23	433.48	06/06/19	12.25	429.21	06/06/19	12.75	429.05	06/06/19	13.70	428.93
03/21/19	10.90	428.81	03/21/19	11.50	429.96	03/21/19	12.00	429.80	03/21/19	12.90	429.73
12/05/18	10.70	429.01	12/05/18	11.70	429.76	12/05/18	12.10	429.70	12/05/18	13.00	429.63
09/13/18	12.15	427.56	09/13/18	13.20	428.26	09/13/18	13.65	428.15	09/13/18	14.50	428.13
06/07/18	12.33	427.38	06/07/18	13.18	428.28	06/07/18	13.61	428.19	06/07/18	14.50	428.13
03/22/18	12.00	427.71	03/22/18	12.67	428.79	03/22/18	13.16	428.64	03/22/18	14.06	428.57
12/06/17	11.74	427.97	12/06/17	12.55	428.91	12/06/17	13.00	428.80	12/06/17	13.91	428.72
09/01/17	12.40	427.31	09/01/17	13.40	428.06	09/01/17	13.80	428.00	09/01/17	14.69	427.94
06/23/17	11.97	427.74	06/23/17	12.70	428.76	06/23/17	13.15	428.65	06/23/17	14.07	428.56
03/08/17	11.57	428.14	03/08/17	12.37	429.09	03/08/17	12.75	429.05	03/08/17	13.65	428.98
12/15/16	11.05	428.66	12/15/16	10.80	430.66	12/15/16	12.24	429.56	12/15/16	13.15	429.48
09/19/16	12.31	427.40	09/19/16	13.22	428.24	09/19/16	13.64	428.16	09/19/16	14.55	428.08
06/07/16	12.15	427.56	06/07/16	12.98	428.48	06/07/16	13.44	428.36	06/07/16	14.32	428.31
03/07/16	11.17	428.54	03/07/16	11.91	429.55	03/07/16	12.36	429.44	03/07/16	13.25	429.38
12/02/15	12.21	427.50	12/02/15	13.03	428.43	12/02/15	13.49	428.31	12/02/15	14.39	428.24
09/16/15	12.69	427.02	09/16/15	13.32	428.14	09/16/15	13.78	428.02	09/16/15	14.67	427.96
06/03/15	11.36	428.35	06/03/15	11.88	429.58	06/03/15	12.37	429.43	06/03/15	13.29	429.34
04/08/15	11.19	428.52	04/08/15	11.71	429.75	04/08/15	12.19	429.61	04/08/15	13.12	429.51
12/01/14	11.92	427.79	12/01/14	12.55	428.91	12/01/14	12.98	428.82	12/01/14	13.88	428.75
09/10/14	11.76	427.95	09/10/14	12.91	428.55	09/10/14	13.35	428.45	09/10/14	14.29	428.34
06/12/14	12.61	427.10	06/12/14	13.12	428.34	06/12/14	13.60	428.20	06/12/14	14.57	428.06
03/25/14	12.25	427.46	03/25/14	13.01	428.45	03/25/14	13.44	428.36	03/25/14	14.21	428.42
12/12/13	11.51	428.20	12/12/13	12.19	429.27	12/12/13	12.63	429.17	12/12/13	13.51	429.12
09/23/13	12.71	427.00	09/23/13	13.26	428.20	09/23/13	13.75	428.05	09/23/13	13.91	428.72
06/10/13	11.07	428.64	06/10/13	11.85	429.61	06/10/13	12.28	429.52	06/10/13	13.16	429.47
03/27/13	12.31	427.40	03/27/13	12.80	428.66	03/27/13	13.26	428.54	03/27/13	14.20	428.43
12/03/12	12.61	427.10	12/03/12	13.75	427.71	12/03/12	13.71	428.09	12/03/12	14.65	427.98
09/12/12	12.91	426.80	09/12/12	13.76	427.70	09/12/12	14.21	427.59	09/12/12	15.11	427.52
06/18/12	12.28	427.43	06/18/12	13.11	428.35	06/18/12	13.56	428.24	06/18/12	14.47	428.16
03/19/12	11.84	427.87	03/19/12	12.61	428.85	03/19/12	13.95	427.85	03/19/12	13.05	429.58
12/05/11	12.28	427.43	12/05/11	12.88	428.58	12/05/11	13.36	428.44	12/05/11	14.28	428.35
09/26/11	10.18	429.53	09/26/11	12.86	428.60	09/26/11	13.35	428.45	09/26/11	14.25	428.38
06/13/11	11.94	427.77	06/13/11	12.84	428.62	06/13/11	13.27	428.53	06/13/11	14.14	428.49
03/29/11	11.12	428.59	03/29/11	12.25	429.21	03/29/11	12.66	429.14	03/29/11	13.75	428.88

Notes:

TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
EI. = Elevation in Feet

Table 3
Historical Groundwater Data
Trench Wells

Well VTM-1			Well VTM-2			Well VTM-3			Well VTM-4			Well VTM-5		
TOC = 439.74			TOC = 438.33			TOC = 439.44			TOC = 441.59			TOC = 441.79		
Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.
06/11/20	10.06	429.68	06/11/20	10.85	427.48	06/11/20	11.97	427.47	06/11/20	13.85	427.74	06/11/20	14.00	427.79
03/20/20	8.10	431.64	03/20/20	9.10	429.23	03/20/20	10.20	429.24	03/20/20	12.05	429.54	03/20/20	12.15	429.64
12/05/19	9.20	430.54	12/05/19	10.22	428.11	12/05/19	11.39	428.05	12/05/19	13.44	428.15	12/05/19	13.61	428.18
09/19/19	9.54	430.20	09/19/19	10.69	427.64	09/19/19	11.86	427.58	09/19/19	13.68	427.91	09/19/19	13.88	427.91
06/06/19	11.60	428.14	06/06/19	10.00	428.33	06/06/19	11.20	428.24	06/06/19	13.00	428.59	06/06/19	6.23	435.56
03/21/19	10.60	429.14	03/21/19	9.00	429.33	03/21/19	10.20	429.24	03/21/19	12.50	429.09	03/21/19	12.25	429.54
12/05/18	10.55	429.19	12/05/18	8.95	429.38	12/05/18	10.05	429.39	12/05/18	12.00	429.59	12/05/18	12.15	429.64
09/13/18	12.20	427.54	09/13/18	10.65	427.68	09/13/18	11.80	427.64	09/13/18	13.70	427.89	09/13/18	13.85	427.94
06/07/18	12.14	427.60	03/22/18	10.46	427.87	03/22/18	11.62	427.82	06/07/18	13.61	427.98	03/22/18	13.75	428.04
03/22/18	11.86	427.88	03/22/18	10.41	427.92	03/22/18	11.36	428.08	03/22/18	13.31	428.28	03/22/18	13.45	428.34
12/06/17	11.65	428.09	12/06/17	10.07	428.26	12/06/17	11.22	428.22	12/06/17	13.17	428.42	12/06/17	13.32	428.47
09/01/17	12.10	427.64	09/01/17	10.40	427.93	09/01/17	10.55	428.89	09/01/17	13.60	427.99	09/01/17	13.77	428.02
06/23/17	11.80	427.94	06/23/17	10.10	428.23	06/23/17	11.21	428.23	06/23/17	13.15	428.44	06/23/17	13.29	428.50
03/08/17	11.24	428.50	03/08/17	9.52	428.81	03/08/17	10.65	428.79	03/08/17	12.58	429.01	03/08/17	12.76	429.03
12/15/16	10.99	428.75	12/15/16	9.33	429.00	12/15/16	10.49	428.95	12/15/16	12.49	429.10	12/15/16	12.54	429.25
09/19/16	12.23	427.51	09/19/16	10.56	427.77	09/19/16	11.71	427.73	09/19/16	13.65	427.94	09/19/16	13.82	427.97
06/07/16	11.98	427.76	06/07/16	10.29	428.04	06/07/16	11.43	428.01	06/07/16	13.44	428.15	06/07/16	13.61	428.18
03/07/16	10.98	428.76	03/07/16	9.25	429.08	03/07/16	10.36	429.08	03/07/16	12.32	429.27	03/07/16	12.49	429.30
12/02/15	12.12	427.62	12/02/15	10.53	427.80	12/02/15	11.68	427.76	12/02/15	13.58	428.01	12/02/15	13.74	428.05
09/16/15	12.55	427.19	09/16/15	10.75	427.58	09/16/15	11.85	427.59	09/16/15	13.73	427.86	09/16/15	14.67	427.12
06/03/15	11.21	428.53	06/03/15	9.55	428.78	06/03/15	10.72	428.72	06/03/15	12.68	428.91	06/03/15	12.86	428.93
04/08/15	11.06	428.68	04/08/15	9.49	428.84	04/08/15	11.65	427.79	04/08/15	12.65	428.94	04/08/15	12.81	428.98
12/01/14	11.55	428.19	12/01/14	9.79	428.54	12/01/14	10.92	428.52	12/01/14	12.91	428.68	12/01/14	13.09	428.70
09/10/14	11.62	428.12	09/10/14	9.91	428.42	09/10/14	11.10	428.34	09/10/14	13.14	428.45	09/10/14	13.31	428.48
06/12/14	11.94	427.80	06/12/14	10.28	428.05	06/12/14	11.45	427.99	06/12/14	13.48	428.11	06/12/14	13.63	428.16
03/25/14	11.69	428.05	03/25/14	10.01	428.32	03/25/14	11.17	428.27	03/25/14	13.32	428.27	03/25/14	13.35	428.44
12/12/13	10.91	428.83	12/12/13	9.31	429.02	12/12/13	10.46	428.98	12/12/13	12.51	429.08	12/12/13	12.56	429.23
09/23/13	12.19	427.55	09/23/13	10.63	427.70	09/23/13	11.79	427.65	09/23/13	15.75	425.84	09/23/13	13.91	427.88
06/10/13	10.45	429.29	06/10/13	8.75	429.58	06/10/13	9.98	429.46	06/10/13	12.08	429.51	06/10/13	13.16	428.63
03/27/13	11.83	427.91	03/27/13	10.82	427.51	03/27/13	11.48	427.96	03/27/13	13.51	428.08	03/27/13	13.69	428.10
12/03/12	12.31	427.43	12/03/12	10.82	427.51	12/03/12	11.98	427.46	12/03/12	13.84	427.75	12/03/12	14.06	427.73
06/18/12	12.01	427.73	06/18/12	10.46	427.87	06/18/12	11.66	427.78	06/18/12	13.70	427.89	06/18/12	13.89	427.90
03/19/12	11.49	428.25	03/19/12	9.91	428.42	03/19/12	11.11	428.33	03/19/12	13.16	428.43	03/19/12	13.33	428.46
12/05/11	12.01	427.73	12/05/11	10.48	427.85	12/05/11	11.62	427.82	12/05/11	13.61	427.98	12/05/11	13.81	427.98
09/26/11	11.95	427.79	09/26/11	10.41	427.92	09/26/11	11.61	427.83	09/26/11	13.66	427.93	09/26/11	13.82	427.97
06/13/11	11.74	428.00	06/13/11	10.15	428.18	06/13/11	11.32	428.12	06/13/11	13.39	428.20	06/13/11	13.59	428.20
03/29/11	11.02	428.72	03/29/11	9.48	428.85	03/29/11	10.65	428.79	03/29/11	12.81	428.78	03/29/11	12.97	428.82

Notes:

TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
El. = Elevation in Feet

Table 3
Historical Groundwater Data
Operable Unit 1 Wells

Well	LTMW-D01		LTMW-S01		LTMW-D02		LTMW-S02		LTMW-D03		LTMW-S03		LTMW-D04		LTMW-S04	
	TOC =	434.90	TOC =	435.52	TOC =	436.74	TOC =	436.79	TOC =	431.27	TOC =	431.43	TOC =	437.18	TOC =	437.24
Date	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.
06/11/20	10.06	424.84	8.88	426.64	11.69	425.05	10.46	426.33	5.23	426.04	4.28	427.15	10.05	427.13	9.70	427.54
03/20/20	8.10	426.80	8.30	427.22	8.90	427.84	8.20	428.59	3.50	427.77	1.80	429.63	8.25	428.93	7.10	430.14
12/05/19	9.20	425.70	8.47	427.05	10.50	426.24	10.17	426.62	4.93	426.34	3.95	427.48	9.65	427.53	9.39	427.85
09/19/19	9.54	425.36	8.70	426.82	10.60	426.14	10.45	426.34	5.20	426.07	4.20	427.23	9.90	427.28	9.55	427.69
06/06/19	7.80	427.10	8.00	427.52	9.70	427.04	9.33	427.46	4.25	427.02	2.90	428.53	6.23	430.95	8.12	429.12
03/21/19	8.00	426.90	8.20	427.32	10.15	426.59	9.77	427.02	4.45	426.82	3.63	427.80	9.35	427.83	8.90	428.34
12/05/18	7.54	427.36	7.54	427.98	9.29	427.45	8.95	427.84	5.75	425.52	2.40	429.03	8.64	428.54	7.78	429.46
09/13/18	8.81	426.09	8.67	426.85	10.60	426.14	10.36	426.43	5.48	425.79	4.18	427.25	10.02	427.16	9.35	427.89
06/07/18	8.55	426.35	8.70	426.82	10.35	426.39	10.32	426.47	4.32	426.95	4.11	427.32	9.78	427.40	9.48	427.76
03/22/18	8.22	426.68	9.41	426.11	10.21	426.53	9.98	426.81	5.65	425.62	3.60	427.83	9.35	427.83	9.05	428.19
12/06/17	8.17	426.73	8.16	427.36	10.07	426.67	9.61	427.18	4.76	426.51	3.30	428.13	9.35	427.83	8.35	428.89
09/01/17	8.75	426.15	8.74	426.78	10.64	426.10	10.31	426.48	5.23	426.04	4.15	427.28	9.99	427.19	9.50	427.74
06/23/17	8.30	426.60	8.53	426.99	10.45	426.29	10.27	426.52	4.91	426.36	4.05	427.38	9.58	427.60	9.45	427.79
03/08/17	8.13	426.77	8.27	427.25	10.11	426.63	9.79	427.00	4.48	426.79	3.53	427.90	9.00	428.18	8.79	428.45
12/15/16	8.11	426.79	8.02	427.50	10.03	426.71	9.73	427.06	4.55	426.72	3.28	428.15	9.32	427.86	8.41	428.83
09/19/16	8.78	426.12	8.73	426.79	10.70	426.04	10.41	426.38	5.26	426.01	4.25	427.18	10.03	427.15	9.61	427.63
06/07/16	8.56	426.34	7.85	427.67	10.16	426.58	10.21	426.58	4.75	426.52	4.07	427.36	9.47	427.71	9.38	427.86
03/07/16	7.75	427.15	7.18	428.34	9.05	427.69	9.15	427.64	3.69	427.58	2.45	428.98	8.55	428.63	7.85	429.39
12/03/15	7.71	427.19	8.29	427.23	9.85	426.89	9.74	427.05	4.38	426.89	3.51	427.92	9.63	427.55	8.65	428.59
09/16/15	8.30	426.60	8.76	426.76	10.29	426.45	10.32	426.47	4.91	426.36	4.15	427.28	9.69	427.49	9.52	427.72
06/03/15	8.07	426.83	8.03	427.49	10.02	426.72	10.13	426.66	4.45	426.82	3.92	427.51	9.35	427.83	9.27	427.97
04/08/15	7.34	427.56	7.99	427.53	9.58	427.16	9.71	427.08	4.01	427.26	3.54	427.89	8.85	428.33	8.75	428.49
12/01/14	7.94	426.96	8.15	427.37	9.75	426.99	9.64	427.15	4.11	427.16	3.13	428.30	9.09	428.09	8.57	428.67
09/10/14	8.14	426.76	8.12	427.40	9.99	426.75	9.64	427.15	4.58	426.69	3.19	428.24	9.30	427.88	8.70	428.54
06/12/14	8.68	426.22	8.24	427.28	10.57	426.17	10.26	426.53	4.71	426.56	4.11	427.32	9.60	427.58	9.42	427.82
03/25/14	8.22	426.68	8.50	427.02	10.11	426.63	10.19	426.60	4.71	426.56	4.09	427.34	9.56	427.62	9.43	427.81
12/12/13	7.61	427.29	7.64	427.88	9.19	427.55	8.75	428.04	3.97	427.30	1.99	429.44	8.57	428.61	7.45	429.79
09/23/13	8.36	426.54	8.75	426.77	10.28	426.46	10.28	426.51	5.11	426.16	4.05	427.38	9.84	427.34	9.52	427.72
06/10/13	7.17	427.73	7.52	428.00	9.09	427.65	8.73	428.06	3.52	427.75	2.18	429.25	7.99	429.19	6.99	430.25
03/27/13	8.27	426.63	8.64	426.88	10.28	426.46	9.98	426.81	4.84	426.43	3.87	427.56	9.61	427.57	9.36	427.88
12/03/12	8.65	426.25	8.60	426.92	10.42	426.32	9.90	426.89	5.08	426.19	3.80	427.63	9.85	427.33	9.91	427.33
09/12/12	8.84	426.06	8.91	426.61	10.76	425.98	10.35	426.44	5.39	425.88	4.17	427.26	10.20	426.98	9.62	427.62
06/18/12	8.35	426.55	8.61	426.91	10.35	426.39	10.26	426.53	5.10	426.17	4.08	427.35	8.76	428.42	9.48	427.76
03/19/12	8.01	426.89	8.11	427.41	9.92	426.82	9.46	427.33	4.50	426.77	3.04	428.39	9.24	427.94	8.29	428.95
12/05/11	8.16	426.74	8.31	427.21	10.12	426.62	9.61	427.18	4.63	426.64	3.35	428.08	9.39	427.79	8.81	428.43
09/26/11	8.38	426.52	8.45	427.07	10.45	426.29	10.18	426.61	4.71	426.56	3.93	427.50	9.45	427.73	9.44	427.80
06/13/11	7.61	427.29	8.36	427.16	10.27	426.47	9.95	426.84	4.78	426.49	3.75	427.68	9.42	427.76	9.17	428.07
03/28/11	7.83	427.07	7.85	427.67	9.68	427.06	9.43	427.36	4.41	426.86	3.34	428.09	9.07	428.11	8.91	428.33

Notes:

TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
El. = Elevation in Feet

Table 3
Historical Groundwater Data
Operable Unit 1 Wells

Well	LTMW-D05		LTMW-S05		LTMW-D06		LTMW-S06		LTMW-S07		LTMW-S08		LTMW-S09		LTMW-S10	
	TOC =	437.78	TOC =	437.92	TOC =	441.70	TOC =	441.64	TOC =	439.70	TOC =	443.81	TOC =	439.79	TOC =	439.67
Date	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.
06/11/20	9.67	428.11	9.93	427.99	12.61	429.09	13.51	428.13	11.43	428.27	15.95	427.86	10.12	429.67	10.86	428.81
03/20/20	7.50	430.28	7.80	430.12	11.00	430.70	11.70	429.94	9.75	429.95	14.15	429.66	9.00	430.79	9.60	430.07
12/05/19	9.30	428.48	9.73	428.19	12.29	429.41	13.12	428.52	10.80	428.90	15.45	428.36	9.73	430.06	10.29	429.38
09/19/19	9.44	428.34	9.86	428.06	11.45	430.25	13.40	428.24	11.20	428.50	15.80	428.01	10.03	429.76	10.70	428.97
06/06/19	8.35	429.43	8.65	429.27	11.60	430.10	12.55	429.09	10.15	429.55	14.94	428.87	9.26	430.53	9.74	429.93
03/21/19	8.92	428.86	9.38	428.54	11.80	429.90	12.50	429.14	10.08	429.62	14.08	429.73	9.15	430.64	9.52	430.15
12/05/18	8.18	429.60	7.30	430.62	11.10	430.60	11.55	430.09	8.55	431.15	13.90	429.91	8.70	431.09	9.20	430.47
09/13/18	9.67	428.11	9.68	428.24	12.70	429.00	13.35	428.29	11.55	428.15	15.80	428.01	10.23	429.56	10.75	428.92
06/07/18	9.47	428.31	9.64	428.28	12.42	429.28	13.26	428.38	11.06	428.64	15.70	428.11	10.10	429.69	10.64	429.03
03/22/18	8.95	428.83	8.80	429.12	12.10	429.60	12.92	428.72	10.40	429.30	15.30	428.51	9.50	430.29	10.15	429.52
12/06/17	9.02	428.76	9.16	428.76	12.00	429.70	12.25	429.39	10.67	429.03	15.10	428.71	9.58	430.21	10.10	429.57
09/01/17	9.51	428.27	9.60	428.32	12.62	429.08	13.50	428.14	12.60	427.10	15.78	428.03	10.38	429.41	10.96	428.71
06/23/17	9.14	428.64	9.60	428.32	12.07	429.63	12.88	428.76	10.73	428.97	15.22	428.59	12.88	426.91	10.18	429.49
03/08/17	8.26	429.52	7.54	430.38	11.52	430.18	11.78	429.86	10.39	429.31	14.69	429.12	9.21	430.58	9.98	429.69
12/15/16	8.80	428.98	9.00	428.92	12.28	429.42	11.70	429.94	9.89	429.81	14.50	429.31	8.60	431.19	9.30	430.37
09/19/16	9.63	428.15	9.65	428.27	12.61	429.09	13.24	428.40	11.44	428.26	15.59	428.22	9.82	429.97	10.68	428.99
06/07/16	8.82	428.96	9.53	428.39	11.98	429.72	13.03	428.61	11.01	428.69	15.36	428.45	9.81	429.98	10.41	429.26
03/07/16	7.85	429.93	8.27	429.65	11.16	430.54	12.13	429.51	9.94	429.76	14.48	429.33	9.05	430.74	9.65	430.02
12/02/15	8.77	429.01	9.21	428.71	12.31	429.39	13.20	428.44	11.55	428.15	15.67	428.14	10.40	429.39	10.95	428.72
09/16/15	8.97	428.81	9.51	428.41	12.58	429.12	13.25	428.39	11.54	428.16	15.65	428.16	9.89	429.90	10.65	429.02
06/03/15	9.25	428.53	9.41	428.51	12.15	429.55	12.93	428.71	10.81	428.89	15.21	428.60	9.15	430.64	9.93	429.74
04/08/15	8.74	429.04	9.36	428.56	11.67	430.03	12.55	429.09	10.06	429.64	14.85	428.96	8.89	430.90	9.54	430.13
12/01/14	8.28	429.50	8.91	429.01	11.77	429.93	12.49	429.15	10.97	428.73	14.78	429.03	9.31	430.48	9.93	429.74
09/10/14	8.85	428.93	8.97	428.95	11.91	429.79	12.68	428.96	10.96	428.74	15.34	428.47	9.35	430.44	10.29	429.38
06/12/14	9.02	428.76	9.52	428.40	12.28	429.42	13.08	428.56	11.14	428.56	15.34	428.47	9.63	430.16	10.46	429.21
03/25/14	9.03	428.75	8.50	429.42	11.95	429.75	12.81	428.83	10.85	428.85	15.03	428.78	9.11	430.68	9.93	429.74
12/12/13	7.96	429.82	7.85	430.07	11.20	430.50	11.87	429.77	10.16	429.54	14.11	429.70	8.95	430.84	9.63	430.04
09/23/13	8.94	428.84	9.52	428.40	12.36	429.34	13.21	428.43	11.39	428.31	15.46	428.35	9.86	429.93	10.64	429.03
06/10/13	7.55	430.23	7.48	430.44	11.15	430.55	11.78	429.86	10.27	429.43	14.12	429.69	9.43	430.36	10.17	429.50
03/27/13	9.13	428.65	9.45	428.47	12.16	429.54	13.10	428.54	10.92	428.78	15.27	428.54	9.55	430.24	10.31	429.36
12/03/12	9.51	428.27	9.48	428.44	13.43	428.27	12.78	428.86	11.59	428.11	15.72	428.09	10.25	429.54	10.91	428.76
09/12/12	9.76	428.02	9.64	428.28	12.81	428.89	13.69	427.95	11.97	427.73	15.95	427.86	10.58	429.21	11.27	428.40
06/18/12	9.26	428.52	9.51	428.41	12.41	429.29	13.23	428.41	11.31	428.39	15.40	428.41	9.81	429.98	10.56	429.11
03/19/12	8.79	428.99	9.04	428.88	12.12	429.58	12.99	428.65	11.05	428.65	15.19	428.62	9.73	430.06	10.43	429.24
12/05/11	9.02	428.76	9.08	428.84	12.22	429.48	13.04	428.60	10.97	428.73	15.19	428.62	9.58	430.21	10.34	429.33
09/26/11	9.32	428.46	9.53	428.39	12.40	429.30	13.20	428.44	11.01	428.69	15.21	428.60	9.55	430.24	10.31	429.36
06/13/11	8.91	428.87	9.34	428.58	11.99	429.71	12.88	428.76	10.79	428.91	15.03	428.78	9.49	430.30	10.29	429.38
03/28/11	8.08	429.70	9.12	428.80	11.62	430.08	12.41	429.23	10.08	429.62	14.46	429.35	10.14	429.65	9.75	429.92

Notes:

TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
El. = Elevation in Feet

Table 4
Groundwater Analytical Data
LTMW-D01

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/21/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20
Benzene	5	1	1	5,100	1,700	1,500	4,800	1,700	5,310	8,990	5,800	5,290	2,470	4,250	5,460	3,440	3,900	1,410	7,360	6,290	2,370	3,400	4,310	2,060
Toluene	1,000	5	1	1,300	430	340	1,100	340	1,090	2,080	1,320	1,470	809	1,230	1,140	992	1,080	1,740	2,200	1,410	630	876	183	392
Ethylbenzene	700	5	1	84	53	54	82	ND	167	241	145	137	179	177	95.0	119	163	203	202	170	142	222	1,120	96.3
Xylene (total)	10,000	5	2	160	ND	ND	170	ND	176	254	206	201	157	187	135	155	164	214.5	339	229	134.8	180.8	277	134
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	0.59	0.43	0.19	0.10	0.19	0.35	0.18	0.19	0.14	0.40	0.48	0.23	0.21	0.33	0.47	0.16
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	5.0	6.2	0.31	0.11	0.36	7.1	3.1	1.1	1.9	7.1	8.6	2.3	0.51	2.8	5.9	0.17
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	13	ND	ND	14	11	ND	ND	ND	10	ND	ND	15	ND	ND	ND	ND	14	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	0.51	0.35	0.15	ND	ND	0.41	0.17	0.14	0.10	0.30	0.55	0.16	ND	0.20	0.47	0.11
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	97.1	229	ND	ND	ND	7.2	94.6	0.44	0.83	170	381	8.3	ND	4.3	121	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	107	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	6.9	ND	6.8	9.1	ND	ND	ND	9.1	6.2	6.6	9.7
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limits
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S01

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/21/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	1.9	ND	1.9	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	1.2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	68	72	79 E	76	120	125	91.2	69.4	56.4	105	75.1	56.5	68.1	101	64.4	53.1	70.6	69.0	74.5	63.7	46.9
Acenaphthylene	N/A	NA	4.9	4.7	ND	ND	ND	ND	4.1	3	3.2	2.5	3.6	2.7	2.2	3.3	4.4	2.6	2	2.7	3.2	3.3	2.3	1.7
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	0.44	0.38	0.52	0.28	0.40	0.34	0.27	0.37	0.47	0.35	0.25	0.47	0.41	0.44	0.24	0.17
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	16	23	20	20	21	ND	13	55	18	12	15	11	17	19	14	14	16	18	18	25	25
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	4.9	4	3.6	2.8	4.8	3.5	2.4	3.7	6.1	3.6	2.6	3.8	5.4	5.0	2.8	2.7
Fluorene	N/A	0.002	4.9	26	25	23	21	28	34.1	27.6	19.9	12.6	28.5	19.2	15.4	18.1	28.3	15.6	13.6	18	22.9	19.6	14.3	12.7
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	0.2	0.38	0.4	0.15	0.24	0.31	ND	0.23	ND	0.31	0.15	0.26	0.23	0.27	0.25	ND
Phenanthrene	N/A	50	4.9	9.4	ND	ND	ND	ND	0.25	0.74	1.7	ND	0.14	0.20	0.26	0.13	0.20	0.16	0.11	0.41	0.13	0.17	0.13	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	5.0	4.2	3.6	2.7	4.9	3.7	2.5	3.8	6.6	4.4	2.7	3.9	5.7	5.3	3.0	2.9
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	8.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	28	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	11.5

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-D02

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/20/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	3.3	2.2	1.6	ND	2.0	0.97	1.2	1.0	0.91	0.23	0.36	0.25	0.15	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	0.8	0.43	0.39	ND	0.48	0.22	0.29	0.31	0.24	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	110	16	ND	93	85	ND	150	200	ND	160	160	160	150	140	10	140	140	110	ND	130	11
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	0.16	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	6	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	22	110	11	13	61	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S02

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/20/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.13	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	35	190	120	130	150	ND	130	75	73	110	90	60	59	110	10	57	71	70	73	76	64
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	0.15	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	15	15	5.1	ND	7.7	ND	ND	7.6	ND	7.1	7.2	ND	ND	ND	5.1	6.3	ND	9.1
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-D03

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/20/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20
Benzene	5	1	1	9.3	9.3	10	8.9	20	15.9	27.1	10.2	8.5	8.9	9.5	4.7	6.4	5.4	8.4	6.2	9.6	6.2	2.5	3.3	4.6
Toluene	1,000	5	1	3.4	2.2	ND	ND	20	13.9	55	5.9	1.9	1.9	5.4	ND	1.2	2.0	3.9	18.2	5.6	2.0	ND	11.0	2.6
Ethylbenzene	700	5	1	100	87	76	86	58	69.6	23.9	63.7	44	49.0	40.2	26.0	34.1	23.6	22.2	3	20.7	16.5	11.3	ND	11.8
Xylene (total)	10,000	5	2	22	16	16	14	42	30.1	25.7	13.5	5.6	7.5	8.4	4.0	4.4	5.5	6.2	7.1	8.4	1.4	ND	ND	3.4
Acenaphthene	N/A	20	4.9	14	16	12	11	ND	411.9	ND	10.7	3.70	10.2	5.9	5.8	8.3	5.7	6.2	8.0	6.0	7.90	4.3	4.3	6.8
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	34.7	10.6	3.1	2.5	2.2	1.5	1.3	2.0	1.6	2.8	2.2	2.1	1.4	0.89	0.54	1.8
Anthracene	N/A	NA	4.9	5.6	5.4	ND	ND	ND	5.2	ND	5.6	0.3	3.7	2.4	2.2	2.8	2.1	2	2.1	1.6	1.6	0.9	0.45	0.73
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	0.43	ND	0.42	ND	0.40	0.26	0.30	0.34	0.29	0.28	0.4	0.38	0.41	0.26	0.23	0.31
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	0.21	ND	0.25	ND	0.24	0.18	0.17	0.19	0.18	0.16	0.21	0.23	0.25	0.17	0.15	0.18
Cyanide	N/A	200	10	67	78	71	75	93	77	79	84	76	66	78	64	66	62	62	65	72	60	53	67	62
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	6.7	6.6	5.6	6.2	ND	6.2	ND	6.1	2.9	5.9	3.7	4.1	4.7	4.0	3.5	5.1	4.2	5.4	3.2	3.4	4.2
Fluorene	N/A	0.002	4.9	11	10	9.3	7.8	ND	11.5	ND	7.1	13.2	6.2	3.7	3.6	5.1	3.5	3.8	5.1	3.6	4.9	2.8	2.3	4.1
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	9.4	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	47	29	24	13	81	556	284	32.2	0.15	10.0	16.5	3.9	3.7	6.9	12.7	9.8	10.6	3.5	0.5	0.3	13.2
Phenanthrene	N/A	50	4.9	28	30	25	27	25	29.5	1.5	30.3	0.11	24.1	15.2	16.3	18.1	18.1	17.9	19.9	15.2	19.6	8.5	2.9	15.9
Pyrene	N/A	50	4.9	8.9	8.6	7.2	8.3	8.3	8.3	1.2	7.6	2.8	7.6	4.8	5.5	6.0	5.3	5.1	6.6	5.3	6.9	4	4.6	5.5
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S03

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/20/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	11	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	10	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	0.15	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	0.16	0.17	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	0.11	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	7.3	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	30	5.9	5.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	7,300	5,500	4,400	4,600	4,300	4,300	4,600	5,330	4,250	3,740	3,620	4,070	3,660	3,060	5,620	4,040	3,740	3,710	4,160	3,840	3,550

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-D04

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/20/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/06/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	15	14	11.5	10	ND	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	11	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	35.3	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	32
Zinc	N/A	2,000	10	ND	ND	490	490	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S04

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/20/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/06/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	400	800	170	450	600	59	2,000	900	1,200	200	1,300	400	230	220	1,300	860	660	190	120	1,700	440
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	610	140	ND	510	340	23	618	358	108	128	472	472	267	179	230	242	184	156	156	44.4	122

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-D05

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/19/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	13	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S05

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/19/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	5,800	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	1,320	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	145	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	206	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	0.19	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	0.31	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	190	220	160	450	250	16	830	510	570	270	380	430	120	89	260	120	230	65	170	150	110
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	0.15	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	5.4	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	27	ND	ND	19	23	ND	27.5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-D06

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/19/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/06/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	ND	ND	92	ND	ND	ND	ND	ND	ND	ND	ND	11	ND	ND	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	8.1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	0.64	ND	ND	8.1	8.5	8.0	6.0	12.0	10.4	7.3	5.7	ND	9.2	8.8	9.6	7.1
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S06

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/19/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/06/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	32	19	32	66	31	ND	190	79	14	18	64	55	19	110	66	11	54	84	53	82
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	18	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S07

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/21/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.16	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	8.8	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	24	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	96.8	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S08

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/19/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.19	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.21	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.31	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.15	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.26	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.14	ND	ND	ND
Cyanide	N/A	200	10	120	100	100	280	120	120	140	240	16	140	16	200	150	80	250	30	10	62	180	380	110
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.51	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.12	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	0.12	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.26	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.46	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	12.5	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S09

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/19/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.11	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	5.4	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	17	45	ND	ND	10	13	23.2	97.6	24.4	ND	15.3	ND	ND	10.7	27.6	ND	14.3	10.1	ND	12.7	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S10

Parameter	EPA - Maximum Allowable (u/L)	NYSDEC AWQS (u/L)	Reporting Level (u/L)	06/03/15	09/16/15	12/03/15	03/04/16	06/09/16	09/21/16	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	17	36	29	6.3	6.3	23	17.4	3.1	4.30	11.0	6.8	2.3	9.7	11.8	5.7	10.8	5.1	13.60	7.70	8.80	19.30
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	0.9	0.96	0.2	0.23	0.73	0.54	0.20	0.51	0.61	0.39	0.74	0.42	0.67	0.63	0.38	0.63
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	0.17	0.12	0.12	ND	0.11	ND	ND	ND	0.14	ND	0.13	0.11	0.15	0.13	ND	0.11
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	13	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	2.1	1.5	0.5	0.62	2.0	1.4	0.71	1.3	1.8	1.1	1.6	1.3	2.1	1.9	1.1	1.4
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	1.5	1.1	0.17	0.35	1.1	0.73	0.25	0.71	1.0	0.7	1.2	0.6	1.3	1.0	0.8	1.6
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	0.2	0.17	ND	ND	0.20	9.1	ND	ND	1.5	0.37	0.13	ND	ND	1.9
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	1.4	0.94	ND	0.22	0.73	0.43	0.12	0.32	0.76	0.32	0.62	0.26	0.86	0.53	0.39	0.76
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	2.6	1.9	0.45	0.71	2.4	1.7	0.90	1.7	2.3	1.5	2	1.6	2.70	2.40	1.4	1.9
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
u/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS



Table 5
Discharge Analytical Data
Groundwater Extraction System Effluent Concentrations

Parameter	City of Rome WPCF Permit Max Daily Limit (mg/L)	12/03/15	03/07/16	06/06/16	09/12/16	01/05/17	03/09/17	06/07/17	09/21/17	12/06/17	03/27/18	06/07/18	09/13/18	12/06/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20
Benzene	0.13	0.044	0.037	0.063	0.043	0.0393	0.0536	0.0611	0.0360	0.0200	0.0274	0.0315	0.0239	0.0297	0.0618	0.0359	0.0423	0.0527	0.0315	0.034
Ethylbenzene	1.59	0.003	0.0021	0.0049	0.0042	0.0025	0.0045	0.0050	0.0052	0.0019	0.0024	0.0040	0.0024	0.0024	0.0046	0.0047	0.0050	0.0065	0.0042	0.0052
Toluene	1.35	0.0011	0.0038	0.0087	0.0021	0.0019	0.0028	0.0095	ND (<0.001)	0.0017	0.0025	0.0025	0.0037	0.0026	0.0113	0.0058	0.0082	0.0079	0.0056	0.0036
Xylene	1.35	ND (<0.001)	ND (<0.001)	0.0011	ND (<0.001)	ND (<0.001)	ND (<0.0030)	0.0034	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	0.0042	0.0011	0.0011	0.0039	ND (<0.0030)	ND (<0.0030)
Total BTEX	2.87	0.048	0.043	0.078	0.049	0.0437	0.0609	0.0790	0.0412	0.0236	0.0323	0.0380	0.0300	0.0347	0.0777	0.0475	0.0566	0.0710	0.0412	0.0428
Arsenic	0.1	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.0050)	ND (<0.010)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	0.012	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)
Cadmium	0.11	ND (<0.001)	ND (<0.001)	ND (<0.001)	ND (<0.0030)	ND (<0.0025)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	0.0054	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)
Chromium	2.77	ND (<0.0040)	ND (<0.0040)	ND (<0.0040)	ND (<0.0050)	ND (<0.010)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)
Copper	1.3	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.0050)	ND (<0.025)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	0.08	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	0.016
Cyanide	1.2	0.075	0.11	0.11	0.062	ND (<0.010)	0.090	0.084	0.056	0.074	0.069	0.070	0.059	0.086	0.067	0.097	0.083	0.098	0.11	0.079
Lead	1.1	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	0.0071	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)
Mercury	0.2	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)
Nickel	1.9	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.04)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)
Silver	0.43	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0060)	ND (<0.010)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)
Zinc	2.6	0.018	0.018	0.018	ND (<0.010)	0.0241	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	0.13	ND (<0.010)	ND (<0.010)	ND (<0.010)	0.015
Oil & Grease	100	ND (<5.0)	ND (<5.0)	ND (<5.0)	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
CBOD5	250	ND (<2.0)	ND (<2.0)	ND (<2.0)	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
pH	5.5 - 11.5 su	6.98	7.06	6.91	6.8	6.8	6.7	6.9	6.8	6.8	6.8	6.7	6.9	7.1	6.9	6.9	6.9	7	6.9	6.7

Results in mg/L.
mg/L = Milligrams per Liter
WPCF = Water Pollution Control Facility
NS = Not Sampled
NA = Not Analyzed



Appendix A – Field Inspection Report

Field Inspection Report**Former MGP Site****Kingsley Avenue****Rome, New York**Date: 6/11/2020Technician: KLTime: 6:00Weather: Sunny 67

Site Controls				
Fence Condition	GOOD	FAIR	DAMAGED	COMMENTS
Kingsley Ave Gate	GOOD	FAIR	DAMAGED	COMMENTS:
Padlock-NG/GES	OPERATIONAL	NON-OPERATIONAL		COMMENTS:
Railroad Ave Gate	GOOD	FAIR	DAMAGED	COMMENTS:
Padlock-NG/GES	OPERATIONAL	NON-OPERATIONAL		COMMENTS:

Vegetation (Surface Cover System)				
Condition of Grass	GOOD	FAIR	POOR	COMMENTS:
Site Trees	NONE	MINOR	SIGNIFICANT	COMMENTS:
Surface Erosion	NONE	MINOR	SIGNIFICANT	COMMENTS:

Stoned Areas				
Condition of Main Access Road	GOOD	FAIR	POOR	COMMENTS:
Condition of Main Staging Area	GOOD	FAIR	POOR	COMMENTS:
Condition of Rear Turn Around Area	GOOD	FAIR	POOR	COMMENTS:

Drainage Systems				
Rip Rap Area	Culvert	UNOBSTRUCTED	OBSTRUCTED	
	Flow	NONE	LITTLE	SIGNIFICANT
	Outlet Channel	OPERATIONAL	NON-OPERATIONAL	COMMENTS:

Miscellaneous				
Evidence of Trespassing	NO		YES	COMMENTS: see below
Litter	NONE	MINOR	SIGNIFICANT	COMMENTS:

General Comments:

Homeless people had set up a tent city in the OU2 area. Police were called on 6/11/2020 and the people were told they were trespassing and told to leave by the end of the day.

On 6/12/2020 the people were not there but they had left some of there tents and debris. The police were called again. KL/BH removed all the left behind stuff and disposed of it at the dumpster at the Harbor Point Site.



Appendix B – Quarterly Gauging and Containment Data

Quarterly Well Data
Kingsley Avenue, Former MGP Site
Utica, New York

WELL ID.	DTW	DTP	DTB	Comments
MW-OU2-1	9.50	43.80	45.81	Removed 3 gallons of DNAPL
MW-OU2-2	10.82	46.42	47.53	
MW-OU2-3	7.10	NP	34.18	
MW-OU2-4	7.10	35.50	39.55	Removed 4 gallons of DNAPL
MW-OU2-5	7.75	NP	36.01	
DNAPL-02	10.06	NP	50.40	
DNAPL-03	10.29	51.90	52.32	Removed 1 gallons of DNAPL
DNAPL-04	11.67	NP	51.45	
DNAPL-05	13.76	NP	54.75	
DNAPL-06	12.73	NP	51.45	
DNAPL-07	13.36	NP	53.60	
DNAPL-08	13.85	NP	58.01	
DNAPL-09	14.73	NP	57.58	
VTM-1	12.63	NP	46.37	
VTM-2	10.85	NP	49.47	
VTM-3	11.97	NP	50.91	
VTM-4	13.85	NP	50.62	
VTM-5	14.00	NP	52.52	
LTMW-D01	8.70	NP	46.84	
LTMW-S01	8.88	NP	16.92	
LTMW-D02	11.69	NP	40.29	
LTMW-S02	10.46	NP	17.98	
LTMW-D03	5.23	NP	40.73	
LTMW-S03	4.28	NP	13.70	
LTMW-D04	10.05	NP	46.36	
LTMW-S04	9.70	NP	17.26	
LTMW-D05	9.67	NP	46.53	
LTMW-S05	9.93	NP	16.83	
LTMW-D06	12.61	NP	52.22	
LTMW-S06	13.51	NP	17.60	
LTMW-S07	11.43	NP	17.82	
LTMW-S08	15.95	NP	17.39	
LTMW-S09	10.12	NP	16.92	
LTMW-S10	10.86	NP	17.18	

Containment

Well Id.	Elevation	DTW	Water Elevation	Positive Delta
DNAPL-02	436.81	10.06	426.75	7.09
Top Steel Sheet Wall	433.84			
DNAPL-03	437.23	10.29	426.94	4.27
Top Steel Sheet Wall	431.21			
DNAPL-04	438.50	11.67	426.83	5.99
Top Steel Sheet Wall	432.82			
DNAPL-05	440.60	13.76	426.84	3.36
Top Steel Sheet Wall	430.20			
DNAPL-06	439.71	12.73	426.98	6.57
Top Steel Sheet Wall	433.55			
VTM-1	439.74	12.63	427.11	4.71
Top Steel Sheet Wall	431.82			
VTM-2	438.33	10.85	427.48	5.22
Top Steel Sheet Wall	432.70			
VTM-3	439.44	11.97	427.47	9.45
Top Steel Sheet Wall	436.92			
VTM-4	441.59	13.85	427.74	5.80
Top Steel Sheet Wall	433.54			
VTM-5	441.79	14.00	427.79	8.21
Top Steel Sheet Wall	436.00			



Appendix C – Well Sampling Field Data

Well ID	Sample ?	Well Size	DTW	DTP	DTB	Comments
MW-OU2-1	No	4"	9.50	53.80	45.81	Removed 3.0 gallons of DNAPL
MW-OU2-2	No	4"	10.82	46.42	47.53	
MW-OU2-3	No	4"	7.10	NP	34.18	
MW-OU2-4	No	4"	7.10	35.50	39.55	Removed 4.0 gallons of DNAPL
MW-OU2-5	No	4"	7.75	NP	36.01	
DNAPL-02	No	6"	10.06	NP	50.40	
DNAPL-03	No	6"	10.29	51.90	52.32	Removed 1.0 gallons of DNAPL
DNAPL-04	No	6"	11.67	NP	51.45	
DNAPL-05	No	6"	13.76	NP	54.75	
DNAPL-06	No	6"	12.73	NP	54.45	
DNAPL-07	No	6"	13.36	NP	53.60	
DNAPL-08	No	6"	13.85	NP	58.01	
DNAPL-09	No	6"	14.73	NP	57.58	
VTM-1	No	6"	12.63	NP	46.37	
VTM-2	No	6"	10.85	NP	49.47	
VTM-3	No	6"	11.97	NP	50.91	
VTM-4	No	6"	13.85	NP	50.62	
VTM-5	No	6"	14.00	NP	52.52	
LTMW-D01	Yes	2"	8.70	NP	46.84	
LTMW-S01	Yes	2"	8.88	NP	16.96	
LTMW-D02	Yes	2"	11.69	NP	40.29	
LTMW-S02	Yes	2"	10.46	NP	17.98	
LTMW-D03	Yes	2"	5.23	NP	40.73	
LTMW-S03	Yes	2"	4.28	NP	13.70	
LTMW-D04	Yes	2"	10.05	NP	46.36	
LTMW-S04	Yes	2"	9.70	NP	17.26	
LTMW-D05	Yes	2"	9.67	NP	46.53	
LTMW-S05	Yes	2"	9.93	NP	16.83	
LTMW-D06	Yes	2"	12.61	NP	52.22	
LTMW-S06	Yes	2"	13.51	NP	17.60	
LTMW-S07	Yes	2"	11.43	NP	17.82	
LTMW-S08	Yes	2"	15.95	NP	17.39	
LTMW-S09	Yes	2"	10.12	NP	16.92	DUP
LTMW-S10	Yes	2"	10.86	NP	17.18	MS/MSD

DTW -depth to water
DTP -depth to product
DTB -depth to bottom
All from top of casing

Sampling Personnel: KL
Job Number: 0603123-134400-221
Well Id. **LTMW-D01**

Date: 6/11/20
Weather: Clear 70°
Time In: 07:15 Time Out: 07:53

Well Information		TOC	Other
Depth to Water:	(feet)	<u>8.70</u>	
Depth to Bottom:	(feet)	46.84	
Depth to Product:	(feet)	<u>—</u>	
Length of Water Column:	(feet)	<u>38.14</u>	
Volume of Water in Well:	(gal)	<u>6.10</u>	
Three Well Volumes:	(gal)	<u>18.30</u>	

Well Type:	Flushmount	<input type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information	
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input type="checkbox"/>
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>
Average Pumping Rate:	(ml/min) <u>200</u>
Duration of Pumping:	(min) <u>30</u>
Total Volume Removed:	(gal) <u>2</u>
Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	
Horiba U-52 Water Quality Meter Used? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
07:20	9.72	19.21	7.72	-103	0.336	0.0	0.50	0.214
07:25	11.95	17.74	7.72	-141	0.268	0.0	0.00	0.174
07:30	14.60	17.14	7.41	-173	0.266	0.0	0.00	0.173
07:35	16.60	16.97	7.96	-199	0.267	0.0	0.00	0.173
07:40	17.70	16.80	7.78	-195	0.267	0.0	0.00	0.173
07:45	19.20	16.79	7.79	-199	0.266	0.0	0.00	0.173
07:50	19.90	16.54	7.91	-210	0.267	0.0	0.00	0.173

Sampling Information:	
EPA SW-846 Method 8270	SVOC PAH's
EPA SW-846 Method 8260	VOC's BTEX
EPA Method 335.4	Cyanide
EPA Method 200.7	Metals
2 - 1 liter ambers	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Sample ID: LTMW-D01-0620	Duplicate? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Sample Time: <u>07:50</u>	MS/MSD? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Shipped: Pace Courier Pickup <input checked="" type="checkbox"/>	
Drop-off Albany Service Center <input type="checkbox"/>	
Laboratory: Pace Analytical Greensburg, PA	

Sampling Personnel: K
Job Number: 0603123-134400-221
Well Id. **LTMW-S01**

Date: 6/11/20
Weather: Sunny 72
Time In: 0755 Time Out: 0835

Well Information		TOC	Other
Depth to Water:	(feet)	<u>8.88</u>	
Depth to Bottom:	(feet)	16.92	
Depth to Product:	(feet)		
Length of Water Column:	(feet)	<u>8.04</u>	
Volume of Water in Well:	(gal)	<u>1.28</u>	
Three Well Volumes:	(gal)	<u>3.85</u>	

Well Type:	Flushmount	<input type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information		Conversion Factors				
Purging Method:	Bailer	<input type="checkbox"/>	Peristaltic	<input checked="" type="checkbox"/>	Grundfos Pump	<input type="checkbox"/>
Tubing/Bailer Material:	Teflon	<input type="checkbox"/>	Stainless St.	<input type="checkbox"/>	Polyethylene	<input checked="" type="checkbox"/>
Sampling Method:	Bailer	<input type="checkbox"/>	Peristaltic	<input checked="" type="checkbox"/>	Grundfos Pump	<input type="checkbox"/>
Average Pumping Rate:	(ml/min)	<u>200</u>				
Duration of Pumping:	(min)	<u>30</u>				
Total Volume Removed:	(gal)	<u>2</u>				
Did well go dry?		Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>	
Horiba U-52 Water Quality Meter Used?		Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>	

gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47

1 gallon=3.785L=3785mL=1337cu. feet

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
08:00	8.95	14.51	7.21	-148	0.585	0.0	0.00	0.362
08:05	8.96	13.87	6.81	-127	0.655	0.0	0.00	0.419
08:10	8.96	14.13	6.78	-127	0.659	0.0	0.00	0.421
08:15	8.96	14.55	6.74	-126	0.652	0.0	0.00	0.417
08:20	8.96	14.50	6.75	-126	0.655	0.0	0.00	0.417
08:25	8.96	14.47	6.76	-127	0.657	0.0	0.00	0.421
08:30	8.96	14.65	6.72	-127	0.656	0.0	0.00	0.420

Sampling Information:			
EPA SW-846 Method 8270	SVOC PAH's	2 - 1 liter ambers	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA SW-846 Method 8260	VOC's BTEX	3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA Method 335.4	Cyanide	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA Method 200.7	Metals	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Sample ID: LTMW-S01-0620	Duplicate?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Shipped: Pace Courier Pickup <input checked="" type="checkbox"/>
Sample Time: <u>08:30</u>	MS/MSD?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Drop-off Albany Service Center <input type="checkbox"/>
Comments/Notes:		Laboratory: Pace Analytical Greensburg, PA	

Sampling Personnel: BH
Job Number: 0603123-134400-221
Well Id.: LTMW-002-002

Date: 6/11/20
Weather: 80°F, P. Sunny
Time In: 0750 Time Out: 0830

Well Information		TOC	Other
Depth to Water:	(feet)	<u>10.69</u>	
Depth to Bottom:	(feet)	<u>47.98</u>	<u>40.29</u>
Depth to Product:	(feet)	<u>NP</u>	
Length of Water Column:	(feet)	<u>28.60</u>	
Volume of Water in Well:	(gal)	<u>4.5</u>	
Three Well Volumes:	(gal)	<u>13.5</u>	

Well Type: Flushmount ☐ Stick-Up ☒
 Well Locked: Yes ☒ No ☐
 Measuring Point Marked: Yes ☒ No ☐
 Well Material: PVC ☒ SS ☐ Other: ☐
 Well Diameter: 1" ☐ 2" ☒ Other: ☐
 Comments: ☐

Purging Information		Conversion Factors				
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>	gal/ft.	1" ID	2" ID	4" ID	6" ID
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input type="checkbox"/>	of				
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>	water	0.04	0.16	0.66	1.47
Average Pumping Rate:	<u>200</u> (ml/min)	1 gallon=3.785L=3785mL=133.7cu. feet				
Duration of Pumping:	<u>30</u> (min)					
Total Volume Removed:	<u>2</u> (gal)	Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>				
Horiba U-52 Water Quality Meter Used? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>						

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
<u>0755</u>	<u>10.73</u>	<u>19.72</u>	<u>7.16</u>	<u>-123</u>	<u>0.182</u>	<u>4.9</u>	<u>0.00</u>	<u>0.119</u>
<u>0800</u>	<u>11.84</u>	<u>19.74</u>	<u>7.18</u>	<u>-115</u>	<u>0.178</u>	<u>1.8</u>	<u>0.00</u>	<u>0.114</u>
<u>0805</u>	<u>12.08</u>	<u>19.79</u>	<u>7.20</u>	<u>-103</u>	<u>0.145</u>	<u>0.0</u>	<u>0.00</u>	<u>0.094</u>
<u>0810</u>	<u>12.49</u>	<u>19.82</u>	<u>7.09</u>	<u>-92</u>	<u>0.143</u>	<u>0.0</u>	<u>0.00</u>	<u>0.093</u>
<u>0815</u>	<u>12.83</u>	<u>19.89</u>	<u>7.10</u>	<u>-83</u>	<u>0.141</u>	<u>0.0</u>	<u>0.00</u>	<u>0.092</u>
<u>0820</u>	<u>12.86</u>	<u>19.94</u>	<u>7.12</u>	<u>-79</u>	<u>0.145</u>	<u>0.0</u>	<u>0.00</u>	<u>0.094</u>
<u>0825</u>	<u>12.87</u>	<u>20.05</u>	<u>7.00</u>	<u>-66</u>	<u>0.143</u>	<u>0.0</u>	<u>0.00</u>	<u>0.093</u>

Sampling Information:		2 - 1 liter ambers		Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA SW-846 Method 8270	SVOC PAH's	3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA SW-846 Method 8260	VOC's BTEX	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA Method 335.4	Cyanide	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA Method 200.7	Metals			
Sample ID: <u>LTMW-002-0620</u>	Duplicate? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Shipped: Pace Courier Pickup	<input checked="" type="checkbox"/>	
Sample Time: <u>0825</u>	MS/MSD? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Drop-off Albany Service Center	<input type="checkbox"/>	
Comments/Notes:		Laboratory: Pace Analytical	Greensburg, PA	

Sampling Personnel: K
Job Number: 0603123-134400-221
Well Id. LTMW-D03

Date: 6/11/20
Weather: Sunny 80
Time In: 08:40 Time Out: _____

Well Information		TOC	Other
Depth to Water:	(feet)	<u>5.23</u>	
Depth to Bottom:	(feet)	<u>40.73</u>	
Depth to Product:	(feet)	<u>✓</u>	
Length of Water Column:	(feet)	<u>35.5</u>	
Volume of Water in Well:	(gal)	<u>5.68</u>	
Three Well Volumes:	(gal)	<u>17.04</u>	

Well Type:	Flushmount	Stick-Up
Well Locked:	Yes <input checked="" type="checkbox"/>	No <input checked="" type="checkbox"/>
Measuring Point Marked:	Yes <input checked="" type="checkbox"/>	No <input checked="" type="checkbox"/>
Well Material:	PVC <input checked="" type="checkbox"/> SS <input checked="" type="checkbox"/> Other: _____	
Well Diameter:	1" <input checked="" type="checkbox"/> 2" <input checked="" type="checkbox"/> Other: _____	
Comments: _____		

Purging Information		Conversion Factors				
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>	gal/ft.	1" ID	2" ID	4" ID	6" ID
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input checked="" type="checkbox"/>	of				
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>	water	0.04	0.16	0.66	1.47
Average Pumping Rate:	(ml/min) <u>200</u>	1 gallon=3.785L=3785mL=1337cu. feet				
Duration of Pumping:	(min) <u>30</u>					
Total Volume Removed:	(gal) <u>2</u>					
Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>						
Horiba U-52 Water Quality Meter Used? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>						

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
08:45	6.14	20.58	7.12	-139	0.738	0.0	0.06	0.475
08:50	7.74	19.68	7.16	-145	0.799	0.0	0.00	0.512
08:55	8.64	19.47	7.19	-150	0.802	0.0	0.00	0.514
09:00	8	19.39	7.22	-154	0.777	0.0	0.00	0.494
09:05	8.40							
09:10	9.40	19.33	7.29	-158	0.601	0.0	0.00	0.388
09:15	9.58	19.28	7.30	-160	0.621	0.0	0.00	0.387

Sampling Information:		SVOC PAH's		2 - 1 liter ambers		Yes	No
EPA SW-846 Method 8270		VOC's BTEX		3 - 40 ml vials		Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
EPA SW-846 Method 8260		Cyanide		1 - 250 ml plastic		Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
EPA Method 335.4		Metals		1 - 250 ml plastic		Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
EPA Method 200.7							
Sample ID: LTMW-D03-0620	Duplicate?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		Shipped:	Pace Courier Pickup	<input checked="" type="checkbox"/>	
Sample Time: 09:15	MS/MSD?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>			Drop-off Albany Service Center	<input type="checkbox"/>	
Comments/Notes: _____				Laboratory: Pace Analytical Greensburg, PA			

Sampling Personnel: KE

Job Number: 0603123-134400-221

Well Id. LTMW-S03

Date: 6/11/20

Weather: Sunny

Time In: 09:20

Time Out:

Well Information

		TOC	Other
Depth to Water:	(feet)	<u>4.28</u>	
Depth to Bottom:	(feet)	<u>13.70</u>	
Depth to Product:	(feet)	<u>—</u>	
Length of Water Column:	(feet)	<u>9.42</u>	
Volume of Water in Well:	(gal)	<u>1.50</u>	
Three Well Volumes:	(gal)	<u>4.50</u>	

Well Type: Flushmount ☐ Stick-Up ☒
Well Locked: Yes ☒ No ☐
Measuring Point Marked: Yes ☒ No ☐
Well Material: PVC ☒ SS ☐ Other: ☐
Well Diameter: 1" ☐ 2" ☒ Other: ☐
Comments:

Purging Information

Purging Method: ☐ Bailer ☐ Peristaltic ☒ Grundfos Pump ☐
Tubing/Bailer Material: Teflon ☐ Stainless St. ☐ Polyethylene ☒
Sampling Method: Bailer ☐ Peristaltic ☒ Grundfos Pump ☐
Average Pumping Rate: (ml/min) 200
Duration of Pumping: (min) 30
Total Volume Removed: (gal) 2

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47

1 gallon=3.785L=3785mL=1337cu. feet

Did well go dry? Yes ☐ No ☒
Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
<u>09:25</u>	<u>4.30</u>	<u>20.21</u>	<u>6.97</u>	<u>1.27</u>	<u>0.461</u>	<u>59.5</u>	<u>5.45</u>	<u>0.295</u>
<u>09:30</u>	<u>4.30</u>	<u>19.94</u>	<u>6.62</u>	<u>-117</u>	<u>0.412</u>	<u>51.2</u>	<u>3.15</u>	<u>0.268</u>
<u>09:35</u>	<u>4.30</u>	<u>19.92</u>	<u>6.59</u>	<u>-122</u>	<u>0.411</u>	<u>36.1</u>	<u>2.32</u>	<u>0.267</u>
<u>09:40</u>	<u>4.30</u>	<u>20.04</u>	<u>6.59</u>	<u>-122</u>	<u>0.408</u>	<u>29.1</u>	<u>2.08</u>	<u>0.265</u>
<u>09:45</u>	<u>4.30</u>	<u>20.22</u>	<u>6.60</u>	<u>-123</u>	<u>0.397</u>	<u>31.3</u>	<u>0.00</u>	<u>0.258</u>
<u>09:50</u>	<u>4.30</u>	<u>20.28</u>	<u>6.61</u>	<u>-124</u>	<u>0.391</u>	<u>28.2</u>	<u>0.04</u>	<u>0.255</u>
<u>09:55</u>	<u>4.30</u>	<u>20.29</u>	<u>6.58</u>	<u>-122</u>	<u>0.391</u>	<u>26.0</u>	<u>0.00</u>	<u>0.254</u>

Sampling Information:

EPA SW-846 Method 8270
EPA SW-846 Method 8260
EPA Method 335.4
EPA Method 200.7

SVOC PAH's
VOC's BTEX
Cyanide
Metals

2 - 1 liter ambers Yes ☒ No ☐
3 - 40 ml vials Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐

Sample ID: LTMW-S03-0620

Duplicate? Yes ☐ No ☒

Sample Time: 09:55

MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
Drop-off Albany Service Center ☐

Comments/Notes:

Laboratory: Pace Analytical
Greensburg, PA

Sampling Personnel: BJA

Job Number: 0603123-134400-221

Well Id. LTMW-D04

Date: 6/11/20

Weather: 80°F, P. sunny

Time In: 0925

Time Out: 1005

Well Information

		TOC	Other
Depth to Water:	(feet)	10.05	
Depth to Bottom:	(feet)	46.36	
Depth to Product:	(feet)	36.31	
Length of Water Column:	(feet)	36.31	
Volume of Water in Well:	(gal)	5.81	
Three Well Volumes:	(gal)	17.43	

Well Type: Flushmount ☒ Stick-Up ☒
Well Locked: Yes ☒ No ☐
Measuring Point Marked: Yes ☒ No ☐
Well Material: PVC ☒ SS ☐ Other: ☐
Well Diameter: 1" ☒ 2" ☐ Other: ☐
Comments:

Purging Information

Purging Method: ☐ Bailer ☒ Peristaltic ☐ Grundfos Pump
Tubing/Bailer Material: Teflon ☐ Stainless St. ☒ Polyethylene
Sampling Method: Bailer ☐ Peristaltic ☒ Grundfos Pump
Average Pumping Rate: 200 (ml/min)
Duration of Pumping: 30 (min)
Total Volume Removed: 2 (gal)
Did well go dry? Yes ☐ No ☒
Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
0930	10.62	16.74	6.65	109	0.503	4.7	3.92	0.324
0935	10.78	16.46	6.94	84	0.518	3.8	3.95	0.332
0940	10.92	16.65	7.62	39	0.532	0.0	2.07	0.343
0945	11.01	17.39	7.68	-35	0.553	0.0	0.00	0.354
0950	11.03	16.05	7.72	-55	0.574	6.2	0.00	0.367
0955	11.02	16.37	7.76	-76	0.572	0.0	0.00	0.365
1000	11.02	16.32	7.78	-78	0.575	0.0	0.00	0.369

Sampling Information:

EPA SW-846 Method 8270
EPA SW-846 Method 8260
EPA Method 335.4
EPA Method 200.7

SVOC PAH's
VOC's BTEX
Cyanide
Metals

2 - 1 liter ambers Yes ☒ No ☐
3 - 40 ml vials Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐

Sample ID: LTMW-D04-0620

Duplicate? Yes ☐ No ☒

Sample Time: 1000

MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
Drop-off Albany Service Center ☐

Comments/Notes:

Laboratory: Pace Analytical
Greensburg, PA

Sampling Personnel: BA

Job Number: 0603123-134400-221

Well Id. LTMW-S04

Date: 6/11/20

Weather: 80°F, sunny

Time In: 0840

Time Out: 0920

Well Information

		TOC	Other
Depth to Water:	(feet)	9.70	
Depth to Bottom:	(feet)	17.26	
Depth to Product:	(feet)	NP	
Length of Water Column:	(feet)	7.56	
Volume of Water in Well:	(gal)	1.21	
Three Well Volumes:	(gal)	3.63	

Well Type: Flushmount ☒ Stick-Up ☒
 Well Locked: Yes ☒ No ☐
 Measuring Point Marked: Yes ☒ No ☐
 Well Material: PVC ☒ SS ☐ Other: ☐
 Well Diameter: 1" ☐ 2" ☒ Other: ☐
 Comments:

Purging Information

Purging Method: ☐ Bailer ☒ Peristaltic ☐ Grundfos Pump
 Tubing/Bailer Material: Teflon ☐ Stainless St. ☒ Polyethylene
 Sampling Method: Bailer ☐ Peristaltic ☒ Grundfos Pump
 Average Pumping Rate: (ml/min) ☐
 Duration of Pumping: (min) ☐
 Total Volume Removed: (gal) ☐
 Did well go dry? Yes ☐ No ☐
 Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
0845	9.81	21.92	6.51	~6	0.115	566	4.13	0.127
0850	9.88	18.48	6.53	14	0.395	127	1.24	0.259
0855	9.93	17.79	6.41	58	0.389	3.4	0.0	0.253
0900	10.00	14.77	6.40	144	0.371	0.0	0.35	0.241
0905	10.04	14.66	6.38	185	0.360	0.0	0.37	0.234
0910	10.04	15.04	6.36	186	0.365	0.0	0.22	0.238
0915	10.05	15.01	6.36	197	0.371	0.0	0.06	0.241

Sampling Information:

EPA SW-846 Method 8270
 EPA SW-846 Method 8260
 EPA Method 335.4
 EPA Method 200.7

SVOC PAH's
 VOC's BTEX
 Cyanide
 Metals

2 - 1 liter ambers Yes ☒ No ☐
 3 - 40 ml vials Yes ☒ No ☐
 1 - 250 ml plastic Yes ☒ No ☐
 1 - 250 ml plastic Yes ☒ No ☐

Sample ID: LTMW-S04-0620
 Sample Time: 0915

Duplicate? Yes ☐ No ☒
 MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
 Drop-off Albany Service Center ☐

Comments/Notes:

Laboratory: Pace Analytical
 Greensburg, PA

Sampling Personnel: [Signature]
Job Number: 0603123-134400-221
Well Id. LTMW-D05

Date: 6/11/20
Weather: Sunny 79
Time In: 11:00 Time Out: 11:40

Well Information		TOC	Other
Depth to Water:	(feet)	<u>9.67</u>	
Depth to Bottom:	(feet)	<u>46.53</u>	
Depth to Product:	(feet)	<u>—</u>	
Length of Water Column:	(feet)		
Volume of Water in Well:	(gal)		
Three Well Volumes:	(gal)		

Well Type:	Flushmount	<input checked="" type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information	
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/> Grundfos Pump <input type="checkbox"/>
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input type="checkbox"/> Polyethylene <input checked="" type="checkbox"/>
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/> Grundfos Pump <input type="checkbox"/>
Average Pumping Rate:	(ml/min) <u>200</u>
Duration of Pumping:	(min) <u>30</u>
Total Volume Removed:	(gal) <u>2</u>
Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	
Horiba U-52 Water Quality Meter Used? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
11:05	12.55	20.20	7.21	-88	0.267	1.4	0.00	0.173
11:10	14.70	19.68	7.40	-79	0.262	0.0	0.00	0.170
11:15	17.23	19.37	7.58	-88	0.261	0.0	0.37	0.170
11:20	18.00	19.26	7.60	-88	0.262	0.0	1.25	0.170
11:25	19.28	19.08	7.66	-91	0.263	0.0	0.46	0.171
11:30	20.22	19.03	7.68	-91	0.263	0.0	0.14	0.171
11:35	21.08	19.34	7.71	-91	0.259	0.0	0.11	0.170

Sampling Information:	
EPA SW-846 Method 8270	SVOC PAH's
EPA SW-846 Method 8260	VOC's BTEX
EPA Method 335.4	Cyanide
EPA Method 200.7	Metals
2 - 1 liter ambers	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Sample ID: LTMW-D05-0620	Duplicate? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Sample Time: <u>11:35</u>	MS/MSD? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Shipped: Pace Courier Pickup <input checked="" type="checkbox"/>	
Drop-off Albany Service Center <input type="checkbox"/>	
Laboratory: Pace Analytical Greensburg, PA	

Sampling Personnel:

Job Number: 0603123-134400-221

Well Id. LTMW-S05

Date: 6/11/20

Weather: Sunny 75

Time In: 10:20

Time Out: 11:40

Well Information

	TOC	Other
Depth to Water: (feet)	9.83	
Depth to Bottom: (feet)	16.83	
Depth to Product: (feet)		
Length of Water Column: (feet)	6.9	
Volume of Water in Well: (gal)	1.10	
Three Well Volumes: (gal)	3.31	

Well Type: Flushmount ☐ Stick-Up ☒
Well Locked: Yes ☒ No ☐
Measuring Point Marked: Yes ☒ No ☐
Well Material: PVC ☒ SS ☐ Other: ☐
Well Diameter: 1" ☐ 2" ☒ Other: ☐
Comments: ☐

Purging Information

Purging Method: ☐ Bailer ☒ Peristaltic ☐ Grundfos Pump ☐
Tubing/Bailer Material: Teflon ☐ Stainless St. ☒ Polyethylene ☒
Sampling Method: Bailer ☐ Peristaltic ☒ Grundfos Pump ☐
Average Pumping Rate: (ml/min) 200
Duration of Pumping: (min) 30
Total Volume Removed: (gal) 2 Did well go dry? Yes ☐ No ☒
Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
10:25	10.21	23.22	6.67	-116	0.399	23.9	0.41	0.256
10:30	10.53	21.73	6.27	-50	0.347	17.6	0.00	0.225
10:35	10.70	21.32	6.25	-26	0.345	14.7	0.00	0.224
10:40	10.74	20.89	6.15	-7	0.377	12.6	0.00	0.245
10:45	10.74	20.79	6.12	-2	0.390	11.2	0.00	0.254
10:50	10.74	20.47	6.08	9	0.423	10.6	0.00	0.275
10:55	10.74	20.45	6.08	10	0.425	10.8	0.00	0.277

Sampling Information:

EPA SW-846 Method 8270
EPA SW-846 Method 8260
EPA Method 335.4
EPA Method 200.7

SVOC PAH's
VOC's BTEX
Cyanide
Metals

2 - 1 liter ambers Yes ☒ No ☐
3 - 40 ml vials Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐

Sample ID: LTMW-S05-0620

Sample Time: 10:58

Duplicate? Yes ☐ No ☒
MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
Drop-off Albany Service Center ☐

Comments/Notes: ☐

Laboratory: Pace Analytical
Greensburg, PA

Sampling Personnel: BM

Job Number: 0603123-134400-221

Well Id. **LTMW-D06**

Date: 6/11/20

Weather: 80°F, cloudy

Time In: 1100

Time Out: 1140

Well Information

		TOC	Other
Depth to Water:	(feet)	<u>12.61</u>	
Depth to Bottom:	(feet)	<u>52.22</u>	
Depth to Product:	(feet)		
Length of Water Column:	(feet)	<u>39.61</u>	
Volume of Water in Well:	(gal)	<u>6.34</u>	
Three Well Volumes:	(gal)	<u>19.02</u>	

Well Type: Flushmount ☐ Stick-Up ☒
 Well Locked: Yes ☒ No ☐
 Measuring Point Marked: Yes ☒ No ☐
 Well Material: PVC ☒ SS ☐ Other: ☐
 Well Diameter: 1" ☐ 2" ☒ Other: ☐
 Comments:

Purging Information

Purging Method:
 Tubing/Bailer Material:
 Sampling Method:
 Average Pumping Rate: 200 (ml/min)
 Duration of Pumping: 30 (min)
 Total Volume Removed: 2 (gal)
 Did well go dry? Yes ☐ No ☒
 Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
<u>1105</u>	<u>13.05</u>	<u>19.26</u>	<u>7.40</u>	<u>-71</u>	<u>0.501</u>	<u>0.0</u>	<u>0.00</u>	<u>0.323</u>
<u>1110</u>	<u>13.31</u>	<u>17.94</u>	<u>7.48</u>	<u>-70</u>	<u>0.384</u>	<u>0.0</u>	<u>0.00</u>	<u>0.249</u>
<u>1115</u>	<u>13.28</u>	<u>18.56</u>	<u>7.46</u>	<u>-54</u>	<u>0.373</u>	<u>0.0</u>	<u>0.00</u>	<u>0.243</u>
<u>1120</u>	<u>13.27</u>	<u>18.44</u>	<u>7.41</u>	<u>-47</u>	<u>0.378</u>	<u>0.0</u>	<u>0.00</u>	<u>0.246</u>
<u>1125</u>	<u>13.27</u>	<u>18.19</u>	<u>7.40</u>	<u>-42</u>	<u>0.382</u>	<u>0.0</u>	<u>0.00</u>	<u>0.248</u>
<u>1130</u>	<u>13.28</u>	<u>18.22</u>	<u>7.38</u>	<u>-38</u>	<u>0.389</u>	<u>0.0</u>	<u>0.00</u>	<u>0.253</u>
<u>1135</u>	<u>13.26</u>	<u>18.27</u>	<u>7.42</u>	<u>-35</u>	<u>0.396</u>	<u>0.0</u>	<u>0.00</u>	<u>0.257</u>

Sampling Information:

EPA SW-846 Method 8270 SVOC PAH's
 EPA SW-846 Method 8260 VOC's BTEX
 EPA Method 335.4 Cyanide
 EPA Method 200.7 Metals

2 - 1 liter ambers Yes ☒ No ☐
 3 - 40 ml vials Yes ☒ No ☐
 1 - 250 ml plastic Yes ☒ No ☐
 1 - 250 ml plastic Yes ☒ No ☐

Sample ID: **LTMW-D06-0620**

Sample Time: 1135

Duplicate? Yes ☐ No ☒

MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
 Drop-off Albany Service Center ☐

Laboratory: Pace Analytical
Greensburg, PA

Comments/Notes:

Sampling Personnel: ST

Job Number: 0603123-134400-221

Well Id. **LTMW-S06**

Date: 6/11/20

Weather: 80°F, P. sunny

Time In: 1020

Time Out: 1100

Well Information

	TOC	Other
Depth to Water: (feet)	<u>13.51</u>	
Depth to Bottom: (feet)	<u>17.60</u>	
Depth to Product: (feet)		
Length of Water Column: (feet)	<u>4.09</u>	
Volume of Water in Well: (gal)	<u>0.65</u>	
Three Well Volumes: (gal)	<u>1.95</u>	

Well Type: Flushmount ☐ Stick-Up ☒
 Well Locked: Yes ☒ No ☐
 Measuring Point Marked: Yes ☒ No ☐
 Well Material: PVC ☒ SS ☐ Other: ☐
 Well Diameter: 1" ☐ 2" ☒ Other: ☐
 Comments:

Purging Information

Purging Method: ☐ Bailer ☐ Peristaltic ☒ Grundfos Pump ☐
 Tubing/Bailer Material: Teflon ☐ Stainless St. ☐ Polyethylene ☒
 Sampling Method: Bailer ☐ Peristaltic ☒ Grundfos Pump ☐
 Average Pumping Rate: 200 (ml/min)
 Duration of Pumping: 30 (min)
 Total Volume Removed: 2 (gal)
 Did well go dry? Yes ☐ No ☒
 Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
<u>1025</u>	<u>13.58</u>	<u>23.12</u>	<u>7.35</u>	<u>30</u>	<u>0.992</u>	<u>48.7</u>	<u>0.97</u>	<u>0.645</u>
<u>1030</u>	<u>13.60</u>	<u>22.72</u>	<u>6.92</u>	<u>-17</u>	<u>1.15</u>	<u>12.8</u>	<u>0.24</u>	<u>0.740</u>
<u>1035</u>	<u>13.59</u>	<u>20.63</u>	<u>6.67</u>	<u>-15</u>	<u>1.22</u>	<u>2.9</u>	<u>0.34</u>	<u>0.780</u>
<u>1040</u>	<u>13.66</u>	<u>19.30</u>	<u>6.66</u>	<u>-16</u>	<u>1.25</u>	<u>0.0</u>	<u>0.00</u>	<u>0.798</u>
<u>1045</u>	<u>13.66</u>	<u>19.40</u>	<u>6.65</u>	<u>-17</u>	<u>1.28</u>	<u>0.0</u>	<u>0.00</u>	<u>0.814</u>
<u>1050</u>	<u>13.59</u>	<u>18.77</u>	<u>6.64</u>	<u>-16</u>	<u>1.27</u>	<u>0.0</u>	<u>0.00</u>	<u>0.812</u>
<u>1055</u>	<u>13.60</u>	<u>18.44</u>	<u>6.63</u>	<u>-16</u>	<u>1.26</u>	<u>0.0</u>	<u>0.00</u>	<u>0.809</u>

Sampling Information:

EPA SW-846 Method 8270
 EPA SW-846 Method 8260
 EPA Method 335.4
 EPA Method 200.7

SVOC PAH's
 VOC's BTEX
 Cyanide
 Metals

2 - 1 liter ambers Yes ☒ No ☐
 3 - 40 ml vials Yes ☒ No ☐
 1 - 250 ml plastic Yes ☒ No ☐
 1 - 250 ml plastic Yes ☒ No ☐

Sample ID: **LTMW-S06-0620**

Sample Time: 1055

Duplicate? Yes ☐ No ☒
 MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
 Drop-off Albany Service Center ☐

Comments/Notes:

Laboratory: Pace Analytical
 Greensburg, PA

Sampling Personnel: K
Job Number: 0603123-134400-221
Well Id. **LTMW-S07**

Date: 6/6/20
Weather: Clouds
Time In: 11:40 Time Out: _____

Well Information		TOC	Other
Depth to Water:	(feet)	<u>11.43</u>	
Depth to Bottom:	(feet)	17.82	
Depth to Product:	(feet)		
Length of Water Column:	(feet)	<u>6.39</u>	
Volume of Water in Well:	(gal)	<u>1.02</u>	
Three Well Volumes:	(gal)	<u>3.06</u>	

Well Type:	Flushmount	<input type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information		Conversion Factors	
Purging Method:	Bailer <input type="checkbox"/>	Peristaltic	<input checked="" type="checkbox"/>
Tubing/Bailer Material:	Teflon <input type="checkbox"/>	Stainless St.	<input type="checkbox"/>
Sampling Method:	Bailer <input type="checkbox"/>	Peristaltic	<input checked="" type="checkbox"/>
Average Pumping Rate:	(ml/min)	<u>200</u>	
Duration of Pumping:	(min)	<u>30</u>	
Total Volume Removed:	(gal)	<u>2</u>	
Horiba U-52 Water Quality Meter Used?	Yes <input checked="" type="checkbox"/>	No	<input type="checkbox"/>

gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47

1 gallon=3.785L=3785mL=1337cu. feet

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
11:50	11.84	17.87	7.58	-66	0.407	6.8	0.81	0.275
11:55	12.70	14.38	6.57	-68	0.577	0.0	0.00	0.369
12:00	12.92	14.24	6.56	-75	0.585	0.0	0.00	0.374
12:05	13.10	14.01	6.71	-87	0.585	0.0	0.00	0.375
12:10	13.25	13.81	6.68	-88	0.584	0.0	0.00	0.375
12:15	13.40	13.69	6.65	-89	0.584	0.0	0.00	0.374
12:20	13.48	13.61	6.64	-90	0.585	0.0	0.00	0.374

Sampling Information:		Shipped:	
EPA SW-846 Method 8270	SVOC PAH's	2 - 1 liter ambers	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA SW-846 Method 8260	VOC's BTEX	3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA Method 335.4	Cyanide	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA Method 200.7	Metals	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Sample ID: LTMW-S07-0620	Duplicate?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Shipped: Pace Courier Pickup <input checked="" type="checkbox"/>
Sample Time: <u>12:20</u>	MS/MSD?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Drop-off Albany Service Center <input type="checkbox"/>
Comments/Notes:		Laboratory: Pace Analytical Greensburg, PA	

Sampling Personnel: BA

Job Number: 0603123-134400-221

Well Id. **LTMW-S08**

Date: 6/11/20

Weather: 80°F, cloudy

Time In: 1145

Time Out: 1230

Well Information

		TOC	Other
Depth to Water:	(feet)	<u>15.95</u>	
Depth to Bottom:	(feet)	<u>17.39</u>	
Depth to Product:	(feet)	<u>NP</u>	
Length of Water Column:	(feet)	<u>1.46</u>	
Volume of Water in Well:	(gal)	<u>0.24</u>	
Three Well Volumes:	(gal)	<u>0.72</u>	

Well Type:

Flushmount: ☐

Stick-Up: ☒

Well Locked:

Yes ☒

No ☐

Measuring Point Marked:

Yes ☒

No ☐

Well Material:

PVC ☒

SS ☐

Other:

Well Diameter:

1" ☐

2" ☒

Other:

Comments:

Purging Information

Purging Method:

Tubing/Bailer Material:

Sampling Method:

Bailer ☐

Peristaltic ☒

Grundfos Pump ☐

Teflon ☐

Stainless St. ☐

Polyethylene ☒

Bailer ☐

Peristaltic ☒

Grundfos Pump ☐

Average Pumping Rate: 200 (ml/min)

Duration of Pumping: 30 (min)

Total Volume Removed: 2 (gal)

Did well go dry?

Yes ☐

No ☒

Horiba U-52 Water Quality Meter Used?

Yes ☒

No ☐

Conversion Factors

gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47

1 gallon=3.785L=3785mL=1337cu. feet

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
1150	15.98	14.33	7.84	-39	0.429	83.8	7.74	0.291
1155	16.06	20.09	7.51	-26	0.543	116	6.92	0.346
1200	16.14	20.42	6.82	17	0.600	1.5	5.09	0.334
1205	16.21	20.19	6.80	35	0.590	0.0	4.51	0.378
1210	16.22	18.95	6.79	41	0.629	0.0	3.81	0.391
1215	16.21	18.87	6.78	52	0.627	0.0	3.04	0.402
1220	16.22	17.81	6.72	63	0.652	0.0	0.87	0.419

Sampling Information:

EPA SW-846 Method 8270

SVOC PAH's

EPA SW-846 Method 8260

VOC's BTEX

EPA Method 335.4

Cyanide

EPA Method 200.7

Metals

2 - 1 liter ambers

Yes ☒

No ☐

3 - 40 ml vials

Yes ☒

No ☐

1 - 250 ml plastic

Yes ☒

No ☐

1 - 250 ml plastic

Yes ☒

No ☐

Sample ID: **LTMW-S08-0620**

Duplicate?

Yes ☐

No ☒

Sample Time: 1220

MS/MSD?

Yes ☐

No ☒

Shipped:

Pace Courier Pickup

☒

Drop-off Albany Service Center

☐

Comments/Notes:

Laboratory:

Pace Analytical

Greensburg, PA

Sampling Personnel: KL Date: 6/11/20
Job Number: 0603123-134400-221 Weather: Cloudy
Well Id. LTMW-S09 Time In: 12:50 Time Out: 13:40

Well Information		TOC	Other
Depth to Water:	(feet)	<u>10.12</u>	
Depth to Bottom:	(feet)	<u>16.92</u>	
Depth to Product:	(feet)		
Length of Water Column:	(feet)	<u>6.79</u>	
Volume of Water in Well:	(gal)	<u>1.09</u>	
Three Well Volumes:	(gal)	<u>3.25</u>	

Well Type: Flushmount ☐ Stick-Up ☒
Well Locked: Yes ☒ No ☐
Measuring Point Marked: Yes ☒ No ☐
Well Material: PVC ☒ SS ☐ Other: ☐
Well Diameter: 1" ☐ 2" ☒ Other: ☐
Comments:

Purging Information		Conversion Factors				
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>	gal/ft.	1" ID	2" ID	4" ID	6" ID
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input type="checkbox"/>	of				
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>	water	0.04	0.16	0.66	1.47
Average Pumping Rate:	(ml/min) <u>200</u>	1 gallon=3.785L=3785mL=133.7cu. feet				
Duration of Pumping:	(min) <u>30</u>					
Total Volume Removed:	(gal) <u>2</u>					
Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>						
Horiba U-52 Water Quality Meter Used? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>						

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
13:00	10.12	20.39	7.21	-61	0.001	1.91	8.21	0.000
13:05	10.22	20.58	7.19	-5.3	0.001	1.91	8.20	0.526
13:10	10.27	13.22	6.81	-4	0.821	0.0	2.16	0.526
13:15	10.27	12.80	6.83	6	0.831	0.2	2.17	0.532
13:20	10.27	12.83	6.80	14	0.832	0.0	5.99	0.532
13:25	10.27	12.82	6.77	21	0.830	0.0	5.70	0.531
13:30	10.27	12.83	6.75	24	0.829	0.0	5.49	0.529

Sampling Information:

EPA SW-846 Method 8270 SVOC PAH's
EPA SW-846 Method 8260 VOC's BTEX
EPA Method 335.4 Cyanide
EPA Method 200.7 Metals

2 - 1 liter ambers Yes ☒ No ☐
3 - 40 ml vials Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐

Field Duplicate 0620
Sample ID: LTMW-S09-0620 Duplicate? Yes ☒ No ☐
Sample Time: 13:30 MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
Drop-off Albany Service Center ☐

Laboratory: Pace Analytical
Greensburg, PA

Comments/Notes:

Sampling Personnel: BA

Job Number: 0603123-134400-221

Well Id. **LTMW-S10**

Date: 06/11/20

Weather: 75°F, cloudy

Time In: 1300

Time Out: 1340

Well Information

	TOC	Other
Depth to Water: <u>10.86</u> (feet)	<u>10.86</u>	
Depth to Bottom: (feet)	<u>17.18</u>	
Depth to Product: <u>ND</u> (feet)	<u>ND</u>	
Length of Water Column: <u>6.36</u> (feet)	<u>6.32</u>	
Volume of Water in Well: (gal)	<u>1.01</u>	
Three Well Volumes: (gal)	<u>3.03</u>	

Well Type: Flushmount ☐ Stick-Up ☒
Well Locked: Yes ☒ No ☐
Measuring Point Marked: Yes ☒ No ☐
Well Material: PVC ☒ SS ☐ Other: ☐
Well Diameter: 1" ☐ 2" ☒ Other: ☐
Comments: ☐

Purging Information

Purging Method: ☐ Bailer ☐ Peristaltic ☒ Grundfos Pump ☐
Tubing/Bailer Material: Teflon ☐ Stainless St. ☐ Polyethylene ☒
Sampling Method: Bailer ☐ Peristaltic ☒ Grundfos Pump ☐
Average Pumping Rate: 200 (ml/min)
Duration of Pumping: 30 (min)
Total Volume Removed: 2 (gal) Did well go dry? Yes ☐ No ☒
Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
1305	10.92	18.92	6.53	-28	0.954	178	6.79	0.615
1310	11.00	16.03	6.46	-26	1.01	87.1	5.22	0.640
1315	11.03	15.75	6.34	-28	1.03	9.7	3.92	0.657
1320	11.06	14.74	6.29	-26	1.05	11.8	2.36	0.670
1325	11.07	14.95	6.27	-28	1.04	3.0	2.19	0.667
1330	11.07	15.04	6.26	-28	1.04	0.0	1.48	0.665
1335	11.07	15.40	6.26	-31	1.04	0.0	0.64	0.667

Sampling Information:

EPA SW-846 Method 8270
EPA SW-846 Method 8260
EPA Method 335.4
EPA Method 200.7

SVOC PAH's
VOC's BTEX
Cyanide
Metals

2 - 1 liter ambers Yes ☒ No ☐
3 - 40 ml vials Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐

LTMW-S10-MS-0620

LTMW-S10-MSD-0620

Sample ID: LTMW-S10-0620
Sample Time: 1335

Duplicate? Yes ☐ No ☒
MS/MSD? Yes ☒ No ☐

Shipped: Pace Courier Pickup ☒
Drop-off Albany Service Center ☐

Comments/Notes:

Laboratory: Pace Analytical
Greensburg, PA



CHAIN-OF-CUSTODY / Analytical Request Document

The Chain-of-Custody is a LEGAL DOCUMENT. All relevant fields must be completed accurately.

Section A Required Client Information		Section B Required Project Information		Section C Invoice Information		Page: 1 of 2	
Company: GES - Syracuse		Report To: Devin Shely (GES) dshely@gesonline.com		Attention: Accounts Payable via email at ges-invoices@gesonline.com			
Address: 5 Technology Place, Suite 4 East Syracuse, New York 13057		Report To: Tim Beaumont (GES) tbeaumont@gesonline.com		Company Name: Groundwater & Environmental Services, Inc.			
Email To: dshely@gesonline.com		Purchase Order No.		Address: 5 Technology Place, Suite 4, East Syracuse, NY 13057			
Phone: 800.220.5069 / Fax: None		Project Name: National Grid - Rome Kingstley Ave. Site, Rome, NY		Face Quote Reference			
Requested Due Date: TAT - Standard		Project Number: 0603123-134400-221-1106		Face Project Manager: Rachel Christner			
				Quarterly GWS			
Section D Required Client Information SAMPLE ID One Character per box A-Z, 0-9 Samples IDs MUST BE UNIQUE		LAW CODE CODE 56158 56159 56160 56161 56162 56163 56164 56165 56166 56167 56168 56169 56170 56171 56172 56173 56174 56175 56176 56177 56178 56179 56180 56181 56182 56183 56184 56185 56186 56187 56188 56189 56190 56191 56192 56193 56194 56195 56196 56197 56198 56199 56200 56201 56202 56203 56204 56205 56206 56207 56208 56209 56210 56211 56212 56213 56214 56215 56216 56217 56218 56219 56220 56221 56222 56223 56224 56225 56226 56227 56228 56229 56230 56231 56232 56233 56234 56235 56236 56237 56238 56239 56240 56241 56242 56243 56244 56245 56246 56247 56248 56249 56250 56251 56252 56253 56254 56255 56256 56257 56258 56259 56260 56261 56262 56263 56264 56265 56266 56267 56268 56269 56270 56271 56272 56273 56274 56275 56276 56277 56278 56279 56280 56281 56282 56283 56284 56285 56286 56287 56288 56289 56290 56291 56292 56293 56294 56295 56296 56297 56298 56299 56300 56301 56302 56303 56304 56305 56306 56307 56308 56309 56310 56311 56312 56313 56314 56315 56316 56317 56318 56319 56320 56321 56322 56323 56324 56325 56326 56327 56328 56329 56330 56331 56332 56333 56334 56335 56336 56337 56338 56339 56340 56341 56342 56343 56344 56345 56346 56347 56348 56349 56350 56351 56352 56353 56354 56355 56356 56357 56358 56359 56360 56361 56362 56363 56364 56365 56366 56367 56368 56369 56370 56371 56372 56373 56374 56375 56376 56377 56378 56379 56380 56381 56382 56383 56384 56385 56386 56387 56388 56389 56390 56391 56392 56393 56394 56395 56396 56397 56398 56399 56400 56401 56402 56403 56404 56405 56406 56407 56408 56409 56410 56411 56412 56413 56414 56415 56416 56417 56418 56419 56420 56421 56422 56423 56424 56425 56426 56427 56428 56429 56430 56431 56432 56433 56434 56435 56436 56437 56438 56439 56440 56441 56442 56443 56444 56445 56446 56447 56448 56449 56450 56451 56452 56453 56454 56455 56456 56457 56458 56459 56460 56461 56462 56463 56464 56465 56466 56467 56468 56469 56470 56471 56472 56473 56474 56475 56476 56477 56478 56479 56480 56481 56482 56483 56484 56485 56486 56487 56488 56489 56490 56491 56492 56493 56494 56495 56496 56497 56498 56499 56500 56501 56502 56503 56504 56505 56506 56507 56508 56509 56510 56511 56512 56513 56514 56515 56516 56517 56518 56519 56520 56521 56522 56523 56524 56525 56526 56527 56528 56529 56530 56531 56532 56533 56534 56535 56536 56537 56538 56539 56540 56541 56542 56543 56544 56545 56546 56547 56548 56549 56550 56551 56552 56553 56554 56555 56556 56557 56558 56559 56560 56561 56562 56563 56564 56565 56566 56567 56568 56569 56570 56571 56572 56573 56574 56575 56576 56577 56578 56579 56580 56581 56582 56583 56584 56585 56586 56587 56588 56589 56590 56591 56592 56593 56594 56595 56596 56597 56598 56599 56600 56601 56602 56603 56604 56605 56606 56607 56608 56609 56610 56611 56612 56613 56614 56615 56616 56617 56618 56619 56620 56621 56622 56623 56624 56625 56626 56627 56628 56629 56630 56631 56632 56633 56634 56635 56636 56637 56638 56639 56640 56641 56642 56643 56644 56645 56646 56647 56648 56649 56650 56651 56652 56653 56654 56655 56656 56657 56658 56659 56660 56661 56662 56663 56664 56665 56666 56667 56668 56669 56670 56671 56672 56673 56674 56675 56676 56677 56678 56679 56680 56681 56682 56683 56684 56685 56686 56687 56688 56689 56690 56691 56692 56693 56694 56695 56696 56697 56698 56699 56700 56701 56702 56703 56704 56705 56706 56707 56708 56709 56710 56711 56712 56713 56714 56715 56716 56717 56718 56719 56720 56721 56722 56723 56724 56725 56726 56727 56728 56729 56730 56731 56732 56733 56734 56735 56736 56737 56738 56739 56740 56741 56742 56743 56744 56745 56746 56747 56748 56749 56750 56751 56752 56753 56754 56755 56756 56757 56758 56759 56760 56761 56762 56763 56764 56765 56766 56767 56768 56769 56770 56771 56772 56773 56774 56775 56776 56777 56778 56779 56780 56781 56782 56783 56784 56785 56786 56787 56788 56789 56790 56791 56792 56793 56794 56795 56796 56797 56798 56799 56800 56801 56802 56803 56804 56805 56806 56807 56808 56809 56810 56811 56812 56813 56814 56815 56816 56817 56818 56819 56820 56821 56822 56823 56824 56825 56826 56827 56828 56829 56830 56831 56832 56833 56834 56835 56836 56837 56838 56839 56840 56841 56842 56843 56844 56845 56846 56847 56848 56849 56850 56851 56852 56853 56854 56855 56856 56857 56858 56859 56860 56861 56862 56863 56864 56865 56866 56867 56868 56869 56870 56871 56872 56873 56874 56875 56876 56877 56878 56879 56880 56881 56882 56883 56884 56885 56886 56887 56888 56889 56890 56891 56892 56893 56894 56895 56896 56897 56898 56899 56900 56901 56902 56903 56904 56905 56906 56907 56908 56909 56910 56911 56912 56913 56914 56915 56916 56917 56918 56919 56920 56921 56922 56923 56924 56925 56926 56927 56928 56929 56930 56931 56932 56933 56934 56935 56936 56937 56938 56939 56940 56941 56942 56943 56944 56945 56946 56947 56948 56949 56950 56951 56952 56953 56954 56955 56956 56957 56958 56959 56960 56961 56962 56963 56964 56965 56966 56967 56968 56969 56970 56971 56972 56973 56974 56975 56976 56977 56978 56979 56980 56981 56982 56983 56984 56985 56986 56987 56988 56989 56990 56991 56992 56993 56994 56995 56996 56997 56998 56999 57000 57001 57002 57003 57004 57005 57006 57007 57008 57009 57010 57011 57012 57013 57014 57015 57016 57017 57018 57019 57020 57021 57022 57023 57024 57025 57026 57027 57028 57029 57030 57031 57032 57033 57034 57035 57036 57037 57038 57039 57040 57041 57042 57043 57044 57045 57046 57047 57048 57049 57050 57051 57052 57053 57054 57055 57056 57057 57058 57059 57060 57061 57062 57063 57064 57065 57066 57067 57068 57069 57070 57071 57072 57073 57074 57075 57076 57077 57078 57079 57080 57081 57082 57083 57084 57085 57086 57087 57088 57089 57090 57091 57092 57093 57094 57095 57096 57097 57098 57099 57100 57101 57102 57103 57104 57105 57106 57107 57108 57109 57110 57111 57112 57113 57114 57115 57116 57117 57118 57119 57120 57121 57122 57123 57124 57125 57126 57127 57128 57129 57130 57131 57132 57133 57134 57135 57136 57137 57138 57139 57140 57141 57142 57143 57144 57145 57146 57147 57148 57149 57150 57151 57152 57153 57154 57155 57156 57157 57158 57159 57160 57161 57162 57163 57164 57165 57166 57167 57168 57169 57170 57171 57172 57173 57174 57175 57176 57177 57178 57179 57180 57181 57182 57183 57184 57185 57186 57187 57188 57189 57190 57191 57192 57193 57194 57195 57196 57197 57198 57199 57200 57201 57202 57203 57204 57205 57206 57207 57208 57209 57210 57211 57212 57213 57214 57215 57216 57217 57218 57219 57220 57221 57222 57223 57224 57225 57226 57227 57228 57229 57230 57231 57232 57233 57234 57235 57236 57237 57238 57239 57240 57241 57242 57243 57244 57245 57246 57247 57248 57249 57250 57251 57252 57253 57254 57255 57256 57257 57258 57259 57260 57261 57262 57263 57264 57265 57266 57267 57268 57269 57270 57271 57272 57273 57274 57275 57276 57277 57278 57279 57280 57281 57282 57283 57284 57285 57286 57287 57288 57289 57290 57291 57292 57293 57294 57295 57296 57297 57298 57299 57300 57301 57302 57303 57304 57305 57306 57307 57308 57309 57310 57311 57312 57313 57314 57315 57316 57317 57318 57319 57320 57321 57322 57323 57324 57325 57326 57327 57328 57329 57330 57331 57332 57333 57334 57335 57336 57337 57338 57339 57340 57341 57342 57343 57344 57345 57346 57347 57348 57349 57350 57351 57352 57353 57354 57355 57356 57357 57358 57359 57360 57361 57362 57363 57364 57365 57366 57367 57368 57369 57370 57371 57372 57373 57374 57375 57376 57377 57378 57379 57380 57381 57382 57383 57384 57385 57386 57387 57388 57389 57390 57391 57392 57393 57394 57395 57396 57397 57398 57399 57400 57401 57402 57403 57404 57405 57406 57407 57408 57409 57410 57411 57412 57413 57414 57415 57416 57417 57418 57419 57420 57421 57422 57423 57424 57425 57426 57427 57428 57429 57430 57431 57432 57433 57434 57435 57436 57437 57438 57439 57440 57441 57442 57443 57444 57445 57446 57447 57448 57449 57450 57451 57452 57453 57454 57455 57456 57457 57458 57459 57460 57461 57462 57463 57464 57465 57466 57467 57468 57469 57470 57471 57472 57473 57474 57475 57476 57477 57478 57479 57480 57481 57482 57483 57484 57485 57486 57487 57488 57489 57490 57491 57492 57493 57494 57495 57496 57497 57498 57499 57500 57501 57502 57503 57504 57505 57506 57507 57508 57509 57510 57511 57512 57513 57514 57515 57516 57517 57518 57519 57520 57521 57522 57523 57524 57525 57526 57527 57528 57529 57530 57531 57532 57533 57534 57535 57536 57537 57538 57539 57540 57541 57542 57543 57544 57545 57546 57547 57548 57549 57550 57551 57552 57553 57554 57555 57556 57557 57558 57559 57560 57561 57562 57563 57564 57565 57566 57567 57568 57569 57570 57571 57572 57573 57574 57575 57576 57577 57578 57579 57580 57581 57582 57583 57584 57585 57586 57587 57588 57589 57590 57591 57592 57593 57594 57595 57596 57597 57598 57599 57600 57601 57602 57603 57604 57605 57606 57607 57608 57609 57610 57611 57612 57613 57614 57615 57616 57617 57618 57619 57620 57621 57622 57623 57624 57625 57626 57627 57628 57629 57630 57631 57632 57633 57634 57635 57636 57637 57638 57639 57640 57641 57642 57643 57644 57645 57646 57647 57648 57649 57650 57651 57652 57653 57654 57655 57656 57657 57658 57659 57660 57661 57662 57663 57664 57665 57666 57667 57668 57669 57670 57671 57672 57673 57674 57675 57676 57677 57678 57679 57680 57681 57682 57683 57684 57685 57686 57687 57688 57689 57690 57691 57692 57693 57694 57695 57696 57697 57698 57699 57700 57701 57702 57703 57704 57705 57706 57707 57708 57709 57710 57711 57712 57713 57714 57715 57716 57717 57718 57719 57720 57721 57722 57723 57724 57725 57726 57727 57728 57729 57730 57731 57732 57733 57734 57735 57736 57737 57738 57739 57740 57741 57742 57743 57744 57745 57746 57747 57748 57749 57750 57751 57752 57753 57754 57755 57756 57757 57758 57759 57760 57761 57762 57763 57764 57765 57766 57767 57768 57769 57770 57771 57772 57773 57774 57775 57776 57777 57778 57779 57780 57781 57782 57783 57784 57785 57786 57787 57788 57789 57790 57791 57792 57793 57794 57795 57796 57797 57798 57799 57800 57801 57802 57803 57804 57805 57806 57807 57808 57809 57810 57811 57812 57813 57814 57815 57816 57817 57818 57819 57820 57821 57822 57823 578					

CHAIN-OF-CUSTODY / Analytical Request Document
The Chain of Custody is a LEGAL DOCUMENT. All relevant fields must be completed accurately.

Section A Required Client Information Company Name: <u>Groundwater & Environmental Services, Inc.</u> Address: <u>5 Technology Place, Suite 4</u> City: <u>Syracuse, NY 13057</u> Phone: <u>315-438-1100</u> Fax: <u>315-438-1100</u> Project Name: <u>National Grid - Rome Hungary</u> Project Number: <u>0603123-134400-221-1106</u> Requested Date: <u>YAT Standard</u>		Section B Required Project Information Request To: <u>David Shaw (G&E)</u> Email: <u>dshaw@gesonline.com</u> Request To: <u>Tim Beaumont (G&E)</u> Email: <u>tbeaumont@gesonline.com</u> Purchase Order No.: <u></u> Project Name: <u>National Grid - Rome Hungary</u> Site Name: <u>Rome NY</u> Project Number: <u>0603123-134400-221-1106</u>		Section C Service Information Attention: <u>Accounts Payable via email at gas.invoicing@gesonline.com</u> Company Name: <u>Groundwater & Environmental Services, Inc.</u> Address: <u>5 Technology Place, Suite 4, East Syracuse NY 13057</u> Price Quote Reference: <u></u> Price Project Manager: <u>Rachel Christner</u>		REGULATORY AGENCY NPDES: <u></u> GROUND WATER: <u></u> DRINKING WATER: <u></u> UST: <u></u> RCRA: <u></u> THER: <u></u> SITE: <u></u> SA: <u></u> L: <u></u> LOCATION: <u></u> DR: <u></u> AC: <u></u> A: <u></u> HER: <u></u>	
Section D Required Client Information SAMPLE ID One Character per Box A-Z 0-9 Sampler ID MUST BE UNIQUE		COLLECTED COMPOSITE START: <u></u> DATE: <u></u> TIME: <u></u> DATE: <u></u> TIME: <u></u>		Preservatives Unpreserved: <u></u> H ₂ SO ₄ : <u></u> HNO ₃ : <u></u> HCl: <u></u> NaOH: <u></u> Na ₂ S ₂ O ₃ : <u></u> Manganese: <u></u> Other: <u></u>			
MATRIX CODE: <u></u> SAMPLE TYPE: <u></u> GROUND: <u></u> C-Comp: <u></u>		SAMPLE TEMP AT COLLECTION: <u></u> BOB CONTAINERS: <u></u>		Filtered (Y/N): <u></u> Requested Analysis: <u></u>			
LTMW-S07-0620 LTMW-S08-0620 LTMW-S09-0620 LTMW-S10-0620 LTMW-S10-MS0620 LTMW-S10-MSD-0620 Field Duplicate-0620 Trip Blank —END OF RECORD—		WT G WT G WT G WT G WT G WT G WT G WT Lab		17:20 12:20 13:30 13:35 13:35 13:35 13:40			
Additional Comments: <u></u> SAMPLES WILL ARRIVE IN <u>2</u> COOLERS Please send reports to: <u>dshaw@gesonline.com, tbeaumont@gesonline.com</u> <u>gesonline.com, dshaw@gesonline.com</u>		RECEIVED BY AFFILIATION: <u></u> DATE: <u></u> TIME: <u></u> ACCEPTED BY AFFILIATION: <u></u> DATE: <u></u> TIME: <u></u>		SAMPLE CONDITIONS Temp in °C: <u></u> Received on ice: <u></u> Cooled: <u></u> Sealed Cooler: <u></u> Sample Intact: <u></u>			



Appendix D – Data Usability Summary Report and Analytical Data



Groundwater & Environmental Services, Inc.

708 North Main Street, Suite 201
Blacksburg, VA 24060

T. 800.662.5067

August 24, 2020

Devin Shay
Groundwater & Environmental Services, Syracuse
5 Technology Place, Suite 4
East Syracuse, NY 13057

RE: Data Usability Summary Report for National Grid- Rome Kingsley Avenue Site Data Packages Pace Analytical Job Nos. 30367766, 30367791

Groundwater & Environmental Services, Inc. (GES) reviewed two data packages (Laboratory Project Number 30367766, 30367791) from Pace Analytical Services, Inc., for the analysis of an effluent sample and trip blank as well as groundwater samples collected June 11, 2020 from monitoring wells located at the National Grid: Rome Kingsley Avenue Site. Sixteen aqueous samples and a field duplicate are analyzed for BTEX, PAHs, arsenic, lead, zinc pH, and total cyanide. The effluent system sample was processed for TCL volatiles, semi-volatiles, eight metals, mercury and total cyanide. Methodologies utilized are those of the USEPA 200.7, 245.1 and 335.4, SM 4500H+B, the USEPA SW846 methods 8260C/8270D with additional QC requirements of the NYSDEC ASP.

The data are reported as part of a complete full deliverable type B data validation. This usability report is generated from review of the following:

- Laboratory Narrative Discussion
- Custody Documentation
- Holding Times
- Surrogate and Internal Standard Recoveries
- Matrix Spike Recoveries/Duplicate (MS/MSD) Correlations
- Field Duplicate Correlations
- Laboratory Control Sample (LCS)
- Preparation/Calibration Blanks
- Calibration/Low Level Standard Responses
- Instrumental Tunes
- Instrument MDLs
- Sample Quantitation and Identification

The items listed above which show deficiencies are discussed within the text of this narrative.

All of the other items are determined to be acceptable for the DUSR level review.

Table 1 – Data Qualifications

Sample ID	Qualifier	Analyte	Reason for qualification
Effluent	UJ-	2-hexanone	Low MS/MSD Recoveries
		4-Methyl-2-pentanone	
	UJ-	Bromomethane	CCV recovered low
All samples	J	pH	Holding time exceedance
Duplicate	R	Zinc	Not confirmed in original sample

In summary, sample results are usable as reported with the exception of zinc in the duplicate sample. All other non-compliances are noted. The result for pH in all applicable samples was qualified by the laboratory as estimated due to the short hold time of 15 minutes. Qualifications are detailed in Table 1.

The laboratory case narratives and sample identification summary forms are attached to this text, and should be reviewed in conjunction with this report.

BTEX and TCL Volatiles by EPA 8260C/NYSDEC ASP

Sample holding times for groundwater and effluent samples and instrumental tune fragmentations are within acceptance ranges. Surrogate and internal standard recoveries are within required limits. Calibrations standards show acceptable responses within analytical protocol and validation action limits, with the exceptions in the effluent analysis of acetone, where the RF was below criteria, and the continuing calibration recoveries for chloroethane, which recovered high, and bromomethane, which recovered low. All three compounds were non-detect in the effluent, and only bromomethane is qualified as estimated with a possible low bias.

Matrix spike and matrix spike recoveries were within laboratory specified criteria with the exception of low recoveries of 2-Hexanone and 4-Methyl-2-pentanone for the effluent sample. The compounds are considered estimated with a possible low bias. The duplicate correlations of LTMW-S09 were not calculated, as no detections were reported in either sample.

Qualifications are noted in **Table 1**.

PAHs by EPA8270D/NYSDEC ASP

Holding times are met. Instrumental tune fragmentations are within acceptance ranges. Surrogate recoveries are within analytical and validation guidelines, with the exception of the low surrogate recovery of terphenyl-d14 associated with the SVOC analysis of LTMW-S01. Re-extraction of the sample occurred outside of hold time, but also reported non-detect for all analytes. The original surrogate recovery was only slightly below criterium, and the data is reliable. Blanks show no contamination. Calibration standards, both initial and continuing, show acceptable responses within analytical method protocols and validation guidelines. The laboratory control spike recoveries and precision indicate the method is within laboratory control, Matrix spike and matrix spike recoveries using LTMW-S03 reported acenaphthene out-of-specification, however the

original concentration was greater than four times that of the spiking concentration, and recoveries, per EPA guidance, cannot be considered reflective of the method efficacy. No qualifications were required based on the non-compliance. All other compound recoveries were within laboratory-specified criteria. The blind field duplicate correlations of LTMW-S09 fall within guidance limits.

Metals by EPA 200.7/EPA 245.3/NYSDEC ASP

The matrix spikes show acceptable accuracy and precision. The blind field duplicate correlations of LTMW-S09 were not calculated, as the original sample reported no above-reporting-limit detections. The duplicate reported a detection level concentration of zinc, but as it was not confirmed in the original sample, the data is not considered reliable, and should not be considered representative of the sampling location

Instrument performance is compliant, and blanks show no contamination above the reporting limit. The recovery on the post digestion spike of mercury was high out of specification, however, the reported value was non-detect. The potential high bias does not affect non-detect data.

Wet Chemistry-Total Cyanide by 9012B and pH

Review was conducted for method compliance, holding times, transcription, calculations, standard and blank acceptability, accuracy and precision, etc., as applicable to each procedure. All are acceptable for the validated samples, with the exception of a possible high bias for cyanide in LTMW-S10 and the effluent sample noted by high recoveries in the MS/MSD. Only the Effluent had detections above reporting limit, and is qualified as noted in **Table 1**. Calibration standard responses are compliant. Blanks show no detections above the reporting limits.

The pH for the Effluent sample is qualified as estimated due to outlying holding time, as noted in the laboratory case narrative.

All other quality control for total cyanide show acceptable recoveries or correlations. Qualifications are noted in **Table 1**.

Data Package Completeness

Complete NYSDEC Category B deliverables were included in the laboratory data package, all information required for validation of the data is present.

Please do not hesitate to contact me if you have comments or questions regarding this report.

Sincerely,



Bonnie Janowiak, Ph.D.
Senior Chemist

SAMPLE SUMMARY

Project: National Grid - Rome Kingsley

Pace Project No.: 30367791

Lab ID	Sample ID	Matrix	Date Collected	Date Received
30367791001	Effluent System 0620	Water	06/11/20 06:30	06/12/20 09:10
30367791002	Trip Blank	Water	06/11/20 00:01	06/12/20 09:10

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367791

Method: EPA 200.7 Rev. 4.4, 1994

Description: 200.7 Metals, Total

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 19, 2020

General Information:

1 sample was analyzed for EPA 200.7 Rev. 4.4, 1994 by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 200.7 Rev. 4.4, 1994 with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Duplicate Sample:

All duplicate sample results were within method acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367791

Method: EPA 245.1 Rev. 3.0, 1994

Description: 245.1 Mercury

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 19, 2020

General Information:

1 sample was analyzed for EPA 245.1 Rev. 3.0, 1994 by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 245.1 Rev. 3.0, 1994 with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Duplicate Sample:

All duplicate sample results were within method acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367791

Method: EPA 8270D by SIM

Description: 8270D PAH SIM Reduced Volume

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 19, 2020

General Information:

1 sample was analyzed for EPA 8270D by SIM by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 3510C with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Internal Standards:

All internal standards were within QC limits with any exceptions noted below.

Surrogates:

All surrogates were within QC limits with any exceptions noted below.

QC Batch: 401166

ST: Surrogate recovery was above laboratory control limits. Results may be biased high.

- Effluent System 0620 (Lab ID: 30367791001)
 - 2-Fluorobiphenyl (S)
 - Terphenyl-d14 (S)

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

QC Batch: 401166

A matrix spike and/or matrix spike duplicate (MS/MSD) were performed on the following sample(s): 30367766016

ML: Matrix spike recovery and/or matrix spike duplicate recovery was below laboratory control limits. Result may be biased low.

- MS (Lab ID: 1942325)
 - Acenaphthene
- MSD (Lab ID: 1942326)

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367791

Method: EPA 8270D by SIM

Description: 8270D PAH SIM Reduced Volume

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 19, 2020

QC Batch: 401166

A matrix spike and/or matrix spike duplicate (MS/MSD) were performed on the following sample(s): 30367766016

ML: Matrix spike recovery and/or matrix spike duplicate recovery was below laboratory control limits. Result may be biased low.

- Acenaphthene

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367791

Method: EPA 8260C

Description: 8260C MSV

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 19, 2020

General Information:

2 samples were analyzed for EPA 8260C by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

QC Batch: 401266

CH: The continuing calibration for this compound is outside of Pace Analytical acceptance limits. The results may be biased high.

- BLANK (Lab ID: 1942542)
 - Chloroethane
- Effluent System 0620 (Lab ID: 30367791001)
 - Chloroethane
- LCS (Lab ID: 1942543)
 - Chloroethane
- MS (Lab ID: 1942544)
 - Chloroethane
- MSD (Lab ID: 1942545)
 - Chloroethane
- Trip Blank (Lab ID: 30367791002)
 - Chloromethane

CL: The continuing calibration for this compound is outside of Pace Analytical acceptance limits. The results may be biased low.

- BLANK (Lab ID: 1942542)
 - Bromomethane
- Effluent System 0620 (Lab ID: 30367791001)
 - Bromomethane
- LCS (Lab ID: 1942543)
 - Bromomethane
- MS (Lab ID: 1942544)
 - Bromomethane
- MSD (Lab ID: 1942545)
 - Bromomethane
- Trip Blank (Lab ID: 30367791002)
 - Bromomethane

Internal Standards:

All internal standards were within QC limits with any exceptions noted below.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367791

Method: EPA 8260C

Description: 8260C MSV

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 19, 2020

Surrogates:

All surrogates were within QC limits with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

QC Batch: 401266

A matrix spike and/or matrix spike duplicate (MS/MSD) were performed on the following sample(s): 30367791001

ML: Matrix spike recovery and/or matrix spike duplicate recovery was below laboratory control limits. Result may be biased low.

- MS (Lab ID: 1942544)
 - 2-Hexanone
 - 4-Methyl-2-pentanone (MIBK)
- MSD (Lab ID: 1942545)
 - 2-Hexanone
 - 4-Methyl-2-pentanone (MIBK)

Additional Comments:

Analyte Comments:

QC Batch: 401266

1c: The analyte did not meet the method recommended minimum RF.

- BLANK (Lab ID: 1942542)
 - Acetone
- Effluent System 0620 (Lab ID: 30367791001)
 - Acetone
- LCS (Lab ID: 1942543)
 - Acetone
- MS (Lab ID: 1942544)
 - Acetone
- MSD (Lab ID: 1942545)
 - Acetone
- Trip Blank (Lab ID: 30367791002)
 - Acetone

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367791

Method: SM 4500H+B-2011

Description: 4500H+ pH, Electrometric

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 19, 2020

General Information:

1 sample was analyzed for SM 4500H+B-2011 by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

H3: Sample was received or analysis requested beyond the recognized method holding time.

- Effluent System 0620 (Lab ID: 30367791001)

H6: Analysis initiated outside of the 15 minute EPA required holding time.

- Effluent System 0620 (Lab ID: 30367791001)

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Duplicate Sample:

All duplicate sample results were within method acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367791

Method: EPA 335.4

Description: 335.4 Cyanide, Total

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 19, 2020

General Information:

1 sample was analyzed for EPA 335.4 by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 335.4 with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Additional Comments:

This data package has been reviewed for quality and completeness and is approved for release.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

SAMPLE SUMMARY

Project: National Grid - Rome Kingsley

Pace Project No.: 30367766

Lab ID	Sample ID	Matrix	Date Collected	Date Received
30367766001	LTMW-D01-0620	Water	06/11/20 07:50	06/12/20 09:10
30367766002	LTMW-S01-0620	Water	06/11/20 08:30	06/12/20 09:10
30367766003	LTMW-D02-0620	Water	06/11/20 08:25	06/12/20 09:10
30367766004	LTMW-S02-0620	Water	06/11/20 07:50	06/12/20 09:10
30367766005	LTMW-D03-0620	Water	06/11/20 09:15	06/12/20 09:10
30367766006	LTMW-S03-0620	Water	06/11/20 09:55	06/12/20 09:10
30367766007	LTMW-D04-0620	Water	06/11/20 10:00	06/12/20 09:10
30367766008	LTMW-S04-0620	Water	06/11/20 09:15	06/12/20 09:10
30367766009	LTMW-D05-0620	Water	06/11/20 11:35	06/12/20 09:10
30367766010	LTMW-S05-0620	Water	06/11/20 10:55	06/12/20 09:10
30367766011	LTMW-D06-0620	Water	06/11/20 11:35	06/12/20 09:10
30367766012	LTMW-S06-0620	Water	06/11/20 10:55	06/12/20 09:10
30367766013	LTMW-S07-0620	Water	06/11/20 12:20	06/12/20 09:10
30367766014	LTMW-S08-0620	Water	06/11/20 12:20	06/12/20 09:10
30367766015	LTMW-S09-0620	Water	06/11/20 13:30	06/12/20 09:10
30367766016	LTMW-S10-0620	Water	06/11/20 13:35	06/12/20 09:10
30367766017	LTMW-S10-MS0620	Water	06/11/20 13:35	06/12/20 09:10
30367766018	LTMW-S10-MSD0620	Water	06/11/20 13:35	06/12/20 09:10
30367766019	Field Duplicate	Water	06/11/20 00:01	06/12/20 09:10
30367766020	Trip Blank	Water	06/11/20 13:40	06/12/20 09:10

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367766

Method: EPA 200.7 Rev. 4.4, 1994

Description: 200.7 Metals, Total

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 22, 2020

General Information:

17 samples were analyzed for EPA 200.7 Rev. 4.4, 1994 by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 200.7 Rev. 4.4, 1994 with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Duplicate Sample:

All duplicate sample results were within method acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367766

Method: EPA 8270D by SIM

Description: 8270D PAH SIM Reduced Volume

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 22, 2020

General Information:

19 samples were analyzed for EPA 8270D by SIM by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 3510C with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Internal Standards:

All internal standards were within QC limits with any exceptions noted below.

Surrogates:

All surrogates were within QC limits with any exceptions noted below.

QC Batch: 401166

SR: Surrogate recovery was below laboratory control limits. Results may be biased low.

- LTMW-S01-0620 (Lab ID: 30367766002)
- Terphenyl-d14 (S)

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

QC Batch: 401166

A matrix spike and/or matrix spike duplicate (MS/MSD) were performed on the following sample(s): 30367766016

ML: Matrix spike recovery and/or matrix spike duplicate recovery was below laboratory control limits. Result may be biased low.

- MS (Lab ID: 1942325)
 - Acenaphthene
- MSD (Lab ID: 1942326)
 - Acenaphthene

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367766

Method: EPA 8270D by SIM

Description: 8270D PAH SIM Reduced Volume

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 22, 2020

Additional Comments:

Analyte Comments:

QC Batch: 401166

1c: This sample was re-extracted past the method required holding time. Surrogate recovery in the re-extract was acceptable and the re-extract results were comparable to the original results. The original, in hold, results are reported.

- LTMW-S01-0620 (Lab ID: 30367766002)
- Terphenyl-d14 (S)

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367766

Method: EPA 8260C

Description: 8260C MSV

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 22, 2020

General Information:

20 samples were analyzed for EPA 8260C by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Internal Standards:

All internal standards were within QC limits with any exceptions noted below.

Surrogates:

All surrogates were within QC limits with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30367766

Method: EPA 335.4

Description: 335.4 Cyanide, Total

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: June 22, 2020

General Information:

19 samples were analyzed for EPA 335.4 by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 335.4 with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Additional Comments:

This data package has been reviewed for quality and completeness and is approved for release.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.