

March 3, 2022

Mr. Justin Starr, PG
New York State Department of Environmental Conservation
Division of Environmental Remediation
Remedial Bureau C
625 Broadway
Albany, NY 12233-70134

**Re: National Grid Kingsley Avenue Site
Rome, New York
2021 4th Quarter OM&M Report**

Dear Mr. Starr:

Enclosed for your review is the 2021 4th Quarter Operation, Maintenance, and Monitoring (OM&M) Report for the National Grid Rome (Kingsley Avenue) Site. OM&M is being conducted in accordance with the Site Management Plan (SMP). National Grid submitted the SMP and Final Engineering Report (FER) on November 30, 2019. The NYSDEC approved the SMP and FER on May 8, 2020.

The completed quarterly OM&M activities included:

- A quarterly site inspection;
- Collection of quarterly static water level measurements of site wells;
- Collection and laboratory analysis of quarterly groundwater samples from OU-1 groundwater wells;
- Collection and laboratory analysis of quarterly groundwater extraction system samples; and
- Monitoring and/or collection of light non-aqueous phase liquid and dense non-aqueous phase liquid at site wells.

The groundwater extraction system is operating continuously and discharging to the sanitary sewer under the existing City of Rome Water Pollution Control Authority discharge permit. A chemical treatment system to minimize iron fouling within the groundwater extraction manhole, submersible pump, and piping also operates continuously.

Mr. Justin Starr, PG
March 3, 2022
Page 2 of 2

If you have any questions regarding the report or the scheduled activities, feel free to contact me at (315) 428-5652.

Very truly yours,

A handwritten signature in black ink, appearing to be 'S. Stucker', written in a cursive style.

for SPS

Steven P. Stucker, C.P.G.
Lead Environmental Engineer
National Grid

Enclosures

Cc: Devin Shay - Groundwater & Environmental Services, Inc.

National Grid

2021 4th Quarter Operations, Maintenance, and Monitoring Report



National Grid Rome Former MGP Site
233 Kingsley Avenue
Rome, NY 13440

March 2022

Version 1





2021 4th Quarter OM&M Report

National Grid Rome Former MGP Site
233 Kingsley Avenue
Rome, NY 13440

Prepared for:
National Grid
300 Erie Boulevard West, C-1
Syracuse, NY 13202

Prepared by:
Groundwater & Environmental Services, Inc.
6780 Northern Boulevard, Suite 100
East Syracuse, NY 13057
TEL: 800-220-3069
www.gesonline.com

GES Project:
0603275.134400.221

Date:
March 3, 2022

Devin T. Shay, PG
Program Manager / Principal Hydrogeologist



Table of Contents

1	Introduction	1
1.1	Overview	1
1.2	Site Description	1
1.3	Site History	2
2	Operation, Maintenance, and Monitoring Activities.....	5
2.1	Quarterly Site Inspection.....	5
2.2	Quarterly Static Water Level Measurements	5
2.3	Quarterly Groundwater Monitoring Event.....	5
2.4	Quarterly Light Non-Aqueous Phase Liquid and Dense Non-Aqueous Phase Liquid Monitoring/Collection Event	6
2.5	Quarterly Groundwater Extraction System Discharge Sampling Event	7
2.6	Groundwater Extraction System Discharge Flow and Operation, Maintenance, and Monitoring	7
2.7	Vegetation Management and Snow Removal.....	8
3	Conclusions, Recommendations, and Certifications.....	9
3.1	Conclusions.....	9
3.2	Recommendations	9
3.3	Certifications	10



Figures

- Figure 1 – Site Location Map
- Figure 2 – Site Map
- Figure 3 – Site Map – West
- Figure 4 – Site Map – East
- Figure 5 – Barrier Wall Profile

Tables

- Table 1 – Groundwater Extraction System Discharge Flow
- Table 2 – Site Monitoring Wells
- Table 3 – Historical Groundwater Data
- Table 4 – Groundwater Analytical Data
- Table 5 – Discharge Analytical Data

Appendices

- Appendix A – Field Inspection Report
- Appendix B – Quarterly Gauging Data
- Appendix C – Well Sampling Field Data
- Appendix D – Data Usability Summary Report and Analytical Data



Acronyms

AWQS	Ambient Water Quality Standards	OM&M	Operations, Maintenance, and Monitoring
BTEX	Benzene, Toluene, Ethylbenzene, and Total Xylenes	OU	Operable Unit
DNAPL	Dense Non-Aqueous Phase Liquid	Pace	Pace Analytical Services, LLC
DUSR	Data Usability Summary Report	PAH	Polycyclic Aromatic Hydrocarbons
GES	Groundwater & Environmental Services, Inc.	POTW	Publically Owned Treatment Works
gpm	Gallons per Minute	QA/QC	Quality Assurance / Quality Control
IRM	Interim Remedial Measures	ROD	Record of Decision
LNAPL	Light Non-Aqueous Phase Liquid	SMP	Site Management Plan
MGP	Manufactured Gas Plant	USEPA	United States Environmental Protection Agency
NYSDEC	New York State Department of Environmental Conservation	WPCF	Water Pollution Control Facility



1 Introduction

1.1 Overview

Groundwater & Environmental Services, Inc. (GES) has prepared this 2021 4th Quarter Operations, Maintenance, and Monitoring Report (OM&M) on behalf of National Grid. This report compiles the OM&M activities completed in the 4th quarter of 2021 at the Former Kingsley Avenue Manufactured Gas Plant (MGP) Site (the Site), located in Rome, New York. The Site has been classified as a Class 2 inactive hazardous waste disposal site by the New York State Department of Environmental Conservation (NYSDEC) and is identified as Site No. 633043.

In accordance with the Record of Decision (March 2002) and following successful completion of the selected remedy, long-term OM&M is required at the Site. The Site Management Plan (SMP) and Final Engineering Report (FER) for Operable Unit (OU) -1 and OU-2 were submitted to NYSDEC on November 30, 2019. The NYSDEC approved the SMP and the FER on May 8, 2020.

The following long-term OM&M activities are conducted in accordance with the SMP to monitor the effectiveness of the remediation previously conducted:

- Quarterly inspection of the Site (March, June, September, December);
- Collection of quarterly static water level measurements at the 34 site wells (16 Operable Unit [OU]-1 shallow and deep groundwater wells, eight dense non-aqueous phase liquid (DNAPL) wells, five OU-2 groundwater wells, and five extraction trench monitoring wells);
- Collection of quarterly groundwater samples from the 16 OU-1 shallow and deep groundwater wells and laboratory analysis of samples;
- Monitoring and/or collection of light non-aqueous phase liquid (LNAPL) and DNAPL monitoring at the 34 site wells, as needed. Offsite disposal of collected DNAPL at least once every 12 months;
- Removal of vegetation and snow, as necessary, to allow for access to the Site; and
- Submittal of quarterly OM&M reports to NYSDEC.

The groundwater extraction system is fully operational and discharges to the nearby sanitary sewer under an existing City of Rome Water Pollution Control Facility (WPCF) discharge permit. Discharge water samples are collected and analyzed quarterly for comparison to the permit limits as part of OM&M.

This OM&M Quarterly Report covers OM&M activities conducted during October, November, and December 2021.

1.2 Site Description

The Site is located within the City of Rome, Oneida County, New York. Refer to **Figure 1** for the Site location map. The Site consists of an approximately 22 acre parcel owned by National Grid.



MGP operations formerly covered the northern half of the Site. The southern portion of the Site consists of a National Grid electric substation, where some MGP impacts were left in place due to the inability to excavate on an active substation. National Grid presently operates and maintains a natural gas valving station located adjacent to the terminus of Kingsley Avenue.

The Site is located south of East Dominick Street, bordering a historic commercial and residential district, approximately 2,000 feet north of the confluence of the Mohawk River with the New York State Barge Canal. It is bounded by the Genesee and Mohawk Valley Railroad to the north, and the Mohawk River forms the western boundary of the Site. Whitesboro Street terminates near the southern boundary of the Site. The City of Rome Department of Public Works facility is located to the east and southeast of the Site. Residential properties are located near the Site entrance on Kingsley Avenue.

The Site is relatively flat, with existing grades ranging from 430 to 442 feet above mean sea level. The primary surface water feature in the area is the Mohawk River, which discharges into the Barge Canal approximately 2,000 feet downstream toward the south. The groundwater flow direction in both the water table aquifer (near surface) and deep aquifer (within the overburden above the clay) is toward the south-southwest. Depth to groundwater generally ranges from 2 to 15 feet below ground surface at the Site.

1.3 Site History

The Kingsley Avenue MGP was constructed in 1917. Gas production began at the Site in 1917 and peaked in 1927. Manufactured gas was produced at the Site using the coal gas and water gas processes. Coal carbonization produced coal gas by heating coal in retorts or beehive ovens. The water gas process involved the passage of steam through burning coal. This formed a gaseous mixture that was passed through a super heater into which an oil feed stock was sprayed. In each process, the gas produced was condensed and purified prior to distribution. The production of manufactured gas created many by-products, some of which remain onsite. A dense, oily liquid known as coal tar condensed out of the gas at various stages during its production, purification, and distribution. Although much of the coal tar produced was reused, recovery of the coal tar waste was incomplete. Substantial amounts of coal tar leaked from storage and processing facilities, contaminating surface and subsurface soils, as well as groundwater. Another by-product includes the discarded lime and/or wood chips treated with iron oxides to remove cyanide and sulfur from the gas (known as purifier waste).

By 1930, production of gas at the Kingsley Avenue MGP was limited to emergency capacity, as the supply of gas for the City of Rome came from other facilities. Between 1938 and 1941, the retort house and relief holder were decommissioned. By 1949, gas manufacturing equipment had been removed from the central building. In 1959, the main gas holder was dismantled.

Environmental concerns at the Site caused NYSDEC and the United States Environmental Protection Agency (USEPA) to evaluate the need for investigation and remedial action. Regulators typically define a single site into a number of OUs. An OU, for technical or administrative reasons, can be addressed separately to eliminate or mitigate a release, threat of release, or exposure pathway resulting from the Site contamination. The lead agency, NYSDEC, defined OUs: OU-1 and OU-2. NYSDEC continues to administer the Site under a Consent Order



with National Grid. OU-1 includes the former Kingsley Avenue MGP property, the surface soils of a small contiguous area of undeveloped New York State-owned land along the Mohawk River, and sediments in a backwater area west of the Site. OU-2 includes an approximate 2-acre area between the National Grid property and the eastern shore of the Mohawk River. Additionally, OU-2 includes the area beneath the Mohawk River and property west of the Mohawk River to East Westboro Street. OU-2 encompasses approximately 20 acres of land. Refer to **Figure 2** for a depiction of OU-1 and OU-2.

This report is focused on OU-1. The following provides a general chronology of key events related to OU-1.

- 1987 – USEPA Preliminary Assessment
- 1992 – Preliminary Site Assessment/Interim Remedial Measures (IRM) Work Plan
- May 1994 – Concentrator House IRM
- July 1994 – Start of Remedial Investigation
- January 1995 – Purifier Disposal Area IRM
- July 1998 – Light non-aqueous phase liquid (LNAPL) Removal IRM initiated
- March 1999 – Remedial Investigation Report
- December 2001 – Offsite Remedial Investigation Report complete
- January 2002 – OU-1 Feasibility Study complete
- March 2002 – OU-1 Record of Decision (ROD) issued by NYSDEC
- August 2006 – Remedial Design approved
- August 2007 – Remedial Action started
- December 2010 – Remedial Action completed
- January 2011 – long-term groundwater and LNAPL and DNAPL monitoring commenced
- December 2011 – long-term groundwater extraction system OM&M commenced
- November 2012 – chemical treatment system for the extraction manhole completed

The remedial elements for OU-1 that have been completed include:

- Utility relocation.
- DNAPL and LNAPL source area soil removal and offsite thermal treatment/disposal.
- Purifier waste material removal and offsite disposal.
- River bank soil removal and offsite disposal.
- Demolition and offsite disposal of the MGP tar well and holder foundations.
- Installation of a sheet pile cutoff wall to contain and minimize offsite migration of DNAPL.

- Installation of a groundwater extraction trench with passive recovery pipe along the upgradient side of the wall. The trench includes a series of collection manholes/sumps. Submersible pumps deliver untreated groundwater to a sanitary manhole under an existing City of Rome WPCF.
- Installation of a 14-acre soil cover in the northern portion of the Site.
- The two foot thick vegetative cover (clean soil above geotextile layer).
- Installation of eight DNAPL collection wells within known source areas.
- Installation of five groundwater monitoring wells along the extraction trench.
- Installation of 16 groundwater monitoring wells to monitor shallow and deep aquifers.
- Installation of five groundwater monitoring wells within the OU-2 area.
- An Environmental Easement has been placed on the property and is included with the final Site Management Plan.

Figure 3 presents the monitoring well locations for the western portion of the Site. **Figure 4** presents monitoring well locations for the eastern portion of the Site.

Following start-up of the groundwater extraction system, it became apparent that iron fouling would be an operational issue. Therefore, National Grid installed a chemical treatment system to help protect the groundwater wells, piping, and submersible pump associated with the groundwater extraction system. As part of the chemical treatment system, a weather-proof structure was installed adjacent to the groundwater pumping manhole and houses a chemical tote and chemical feed pump. An environmental friendly iron inhibitor (REDUX 340) is injected into the pumping manhole to protect the submersible pump, piping, and metering instruments. This chemical is used at similar National Grid sites across central and eastern New York State in order to minimize iron fouling and reduce operation and maintenance costs and has been approved by the City of Rome publicly owned treatment works (POTW). The chemical treatment system became operational in November 2012.

2 Operation, Maintenance, and Monitoring Activities

2.1 Quarterly Site Inspection

GES conducted the 2021 4th quarter site inspection on December 3, 2021. Inspections are generally conducted in March, June, September, and December of each year. The Site inspection included the Site wells, security perimeter fence/gates, drainage system, vegetation, and the Site access road. In general, the Site was noted to be in compliance during the inspection. Refer to **Appendix A** for the Site Inspection Form.

There are 34 total site wells that were inspected as part of this event. **Figures 3** and **4** show the well locations. **Table 2** details each well in terms of horizontal location, vertical elevation, diameter, material, and screen elevation.

2.2 Quarterly Static Water Level Measurements

Quarterly static water level measurements were collected from the 34 wells on December 2 and 3, 2021. **Table 3** presents historical and recent static water level measurements. Refer to **Appendix B** for the field log sheet with water level measurements.

Prior to the construction of the barrier wall and groundwater extraction trench/system remedy, groundwater generally flowed northwesterly toward the Mohawk River. The remedy was designed and constructed to intercept that groundwater flow pattern and minimize migration of site-related DNAPL from the upgradient side of the barrier wall to the river. To ensure that the barrier wall meets the intent of the remedial action, it was agreed by NYSDEC and National Grid that the long-term compliance mechanism would be to compare the top of steel sheeting barrier wall (generally 435 to 437 feet above sea level) with the groundwater levels immediately upgradient of the barrier wall.

Eight manholes (MH-2, MH-3, MH-4, MH-5, MH-6, MH-6A, MH-7, and MH-8) and ten groundwater monitoring wells (DNAPL-2, DNAPL-3, DNAPL-4, DNAPL-5, DNAPL-6, VTW-1, VTW-2, VTW-3, VTW-4, and VTW-5) were constructed immediately upgradient of the barrier wall within the gravel extraction trench. The static water levels in each of the upgradient groundwater monitoring wells were measured and found to be between 425 and 435 (**Table 3**) feet above sea level since start-up of the groundwater extraction system. Groundwater does not overtop the barrier wall. **Figure 5** presents the groundwater levels compared to the barrier wall profile. Gauging data for all 34 wells and containment data for the 10 upgradient groundwater monitoring wells are presented in **Appendix B**.

2.3 Quarterly Groundwater Monitoring Event

The 2021 4th quarter groundwater monitoring event was conducted on December 2 and 3, 2021. Sixteen groundwater monitoring wells were sampled (LTMW-D01, LTMW-S01, LTMW-D02, LTMW-S02, LTMW-D03, LTMW-S03, LTMW-D04, LTMW-S04, LTMW-D05, LTMW-S05, LTMW-D06, LTMW-S06, LTMW-S07, LTMW-S08, LTMW-S09, LTMW-S10).



The wells were sampled in accordance with USEPA Low-Flow Groundwater Sampling Procedures [1996]. Purge water was contained and subsequently discharged to the onsite groundwater extraction system which discharges water to the City of Rome WPCF. Field measurements (temperature, pH, oxidation-reduction potential, conductivity, turbidity, dissolved oxygen, and total dissolved solids) were recorded at each well during the sampling using a water quality meter and are presented in **Appendix C**.

In addition to the 16 water samples collected, four quality assurance/quality control (QA/QC) samples were collected, including one Matrix Spike sample, one Matrix Spike Duplicate sample, one field duplicate sample, and one trip blank sample. Twenty total samples were shipped on ice to the Pace Analytical Services, LLC (Pace) of Greensburg, Pennsylvania, for laboratory analysis. Analyses included: polycyclic aromatic hydrocarbons (PAHs) via USEPA Method 8270D; benzene, toluene, ethylbenzene, and total xylenes (BTEX) via USEPA Method 8260C; heavy metals via USEPA Method 200.7; and total cyanide via USEPA Method 335.4.

The analytical results included detections of BTEX, acenaphthene, benzo(a)anthracene, chrysene, cyanide, fluorene, and zinc above the New York State regulatory maximum allowable limits. A summary of laboratory analytical results is provided in **Table 4**. Zinc levels above the guidance value provided in NYSDEC's Technical and Operational Guidance Series section 1.1.1. were only observed at LTMW-S03. Of the 16 wells sampled, two (2) wells (LTMW-D01 and LTMW-D03) had BTEX concentrations above the New York State Groundwater Ambient Water Quality Standards (AWQS) and four (4) wells (LTMW-D01, LTMW-S01, LTMW-D03, and LTMW-S03) had semi-volatile organic compound detections above the AWQS. Cyanide concentrations were detected above the AWQS in LTMW-S04 and LTMW-S08. Results indicated no detections of any compound for LTMW-D04, LTMW-D05, LTMW-D06, LTMW-S07, LTMW-S09, and LTMW-S10.

The analytical data report was validated by GES. The primary objective of the data validation is to identify any questionable or invalid laboratory processes or data. The data validator reviewed the summary form information, the raw sample data, and a limited review of associated raw QC data. In summary, sample results are usable as reported. Qualifications are detailed in Table 1 of **Appendix D**, which presents the Data Usability Summary Report (DUSR) including the validated laboratory data.

2.4 Quarterly Light Non-Aqueous Phase Liquid and Dense Non-Aqueous Phase Liquid Monitoring/Collection Event

Each of the 34 wells was monitored for LNAPL and DNAPL in December for this quarter. The gauging data for these events are presented in **Appendix B**. This activity is conducted in conjunction with the collection of static water level measurements. A probe is lowered to the water level in the well and inspected for LNAPL. The probe is then lowered to the bottom of the well and inspected for DNAPL. If LNAPL or DNAPL is discovered in measurable quantities, product is removed from the well using a submersible pump. The removed product/water mixture is subsequently containerized in a properly labeled NYSDOT-approved 55-gallon drum for future offsite disposal. DNAPL in measurable quantities was noted in two site wells: MW-OU2-1, and MW-OU2-4.



As part of the NAPL monitoring/collection event, a total of 5.0 gallons of DNAPL were collected (2.0 gallons from MW-OU2-1, and 3.0 gallons from MW-OU2-4) during this quarter.

Since the start of the NAPL monitoring/collection program, a total of approximately 595 gallons of DNAPL have been removed for offsite disposal. Zero gallons of LNAPL have been detected/recovered.

2.5 Quarterly Groundwater Extraction System Discharge Sampling Event

Under an existing City of Rome WPCF discharge permit, quarterly sampling, analysis, and reporting of the groundwater extraction system discharge to the local sewer system is required. A water sample was collected December 2, 2021, and analyzed by Pace for the permit-specified parameters. No detections above permit limits were noted. **Table 5** provides the analytical results compared to the permit limits.

The analytical data report was validated by GES. The primary objective of the data validation is to identify any questionable or invalid laboratory processes or data. The validator reviewed the summary form information, the raw sample data, and a limited review of associated raw QC data. The review stated that field sample analyte values/reporting limits were usable as reported. The laboratory result for pH is always considered estimated as the EPA recommended short hold time of 15 minutes can only be met by in-field measurements. Qualifications are detailed in Table 1 of **Appendix D**, which presents the Data Usability Summary Report (DUSR) including the validated laboratory data.

2.6 Groundwater Extraction System Discharge Flow and Operation, Maintenance, and Monitoring

The groundwater extraction system consists of a gravel trench, a pumping manhole, dual submersible pumps, and below ground piping. The piping enters the onsite groundwater treatment building where flow measurements, discharge sampling, pressure measurements, and other OM&M activities can be conducted. The piping then continues below ground from the nearby sanitary sewer manhole to the City of Rome WPCF.

A mechanical flow meter is located within the Site building and serves as the recording device for the effluent water. During this reporting period, 3,209,594 gallons (average flow ~ 24.6 gpm) were discharged. Since the groundwater extraction system was installed, approximately 182.1 million gallons have been discharged. Below is a summary table for the groundwater extraction system discharge flow:



Table 1 – Groundwater Extraction System Discharge Flow

Time Period	Discharge Flow (gallons)
2010	11,600,000
2011	14,400,000
2012	19,900,000
2013	19,500,000
2014	16,500,000
2015	16,686,700
2016	13,695,010
2017	13,874,930
2018	13,208,189
2019	15,989,356
2020	13,710,857
2021 1 st Quarter	3,337,395
2021 2 nd Quarter	3,105,148
2021 3 rd Quarter	3,430,816
2021 4 th Quarter	3,209,594
TOTAL	182,147,995

The previous consultant conducted an evaluation of the groundwater extraction system, including inspections of the extraction manhole, submersible pumps, valving/controls, and clean-outs. Iron fouling throughout the system, particularly scaling on the submersible pumps, piping, and metering instruments, had been observed. As such, a chemical scale inhibitor (Redux 340) system, which applies the Redux 340 at the groundwater extraction manhole/submersible pumps, was installed and became operational in November 2012. A heating element located at the pumping manhole was installed in June 2012. Electrical power and building lighting/heating was installed in August/September 2012. Information regarding the environmentally-friendly, iron scale inhibitor was previously provided to the City of Rome POTW. The groundwater treatment system (including pumping station, conveyance piping, and flow meters) was cleaned (water lancing) during September 2012 in order to remove iron scale build-up in advance of the chemical treatment system installation.

2.7 Vegetation Management and Snow Removal

Vegetation management activities were conducted during the 4th quarter 2021 as needed.

3 Conclusions, Recommendations, and Certifications

3.1 Conclusions

Based on data collected from the 2021 4th quarter OM&M activities, the following conclusions were made:

- Overall, the site is in regulatory compliance. Vegetation maintenance was conducted as needed during 4th quarter 2021.
- Quarterly static water level measurements were collected at ten groundwater monitoring wells upgradient of the steel sheeting barrier within the gravel extraction trench. The static water levels of the upgradient wells (ranging between 425 to 429 feet above sea level) did not overtop the barrier wall (top of wall ranges between 435 to 437 feet above sea level).
- Site groundwater contained detectable concentrations of BTEX, acenaphthene, benzo(a)anthracene, chrysene, cyanide, and fluorene above the New York State regulatory maximum allowable limits. Additionally, analytical results for well LTMW-S03 indicated zinc above the NYSDEC AWQS guidance values. Six (6) of the 16 wells (LTMW-D01, LTMW-S01, LTMW-D03, LTMW-S03, LTMW-S04, and LTMW-S08) sampled had at least one detection of a site-related constituent above the New York State limits.
- The total quarterly volume of DNAPL collected (5.0 gallons) was removed from two wells (MW-OU2-1 and MW-OU2-4). Approximately 595 gallons of DNAPL have been removed from the site wells since the inception of the program. LNAPL has not been observed in any site wells to date.
- The groundwater extraction system operated continuously at an average flow rate of approximately 24.6 gpm, and a quarterly total of 3,209,594 gallons were discharged to the local sanitary sewer in accordance with the City of Rome WPCF discharge permit. A quarterly effluent water sample was collected and analyzed. There were no permit limit exceedances. Since December 2011, approximately 182.1 million gallons of water have been discharged without any permit limit exceedances.


3.2 Recommendations

It is recommended that all OM&M activities continue.

3.3 Certifications

I certify the following:

- The inspection of the Site to confirm the effectiveness of the institutional and engineering controls required by the remedial program was performed under my direction;
- The institutional controls and engineering controls employed at this site are unchanged from the date the controls were put in place, or last approved by the Department;
- Nothing has occurred that would impair the ability of the controls to protect the public health and environment;
- Nothing has occurred that would constitute a violation or failure to comply with any SMP for this control;
- Access to the Site will continue to be provided to the Department to evaluate the remedy, including access to evaluate the continued maintenance of the controls;
- Use of the Site is compliant with the Declarations of Covenants and Restrictions;
- The engineering control systems are performing as designed and are effective;
- To the best of my knowledge and belief, the work and conclusions described in this certification are in accordance with the requirements of the Site remedial program; and
- The information presented in this report is accurate and complete.



Signature

Name: Gerald H. Cresap, P.E.

Title: Director of Engineering


Company: Groundwater & Environmental Services, Inc.



3-2-2022
Date



Figures

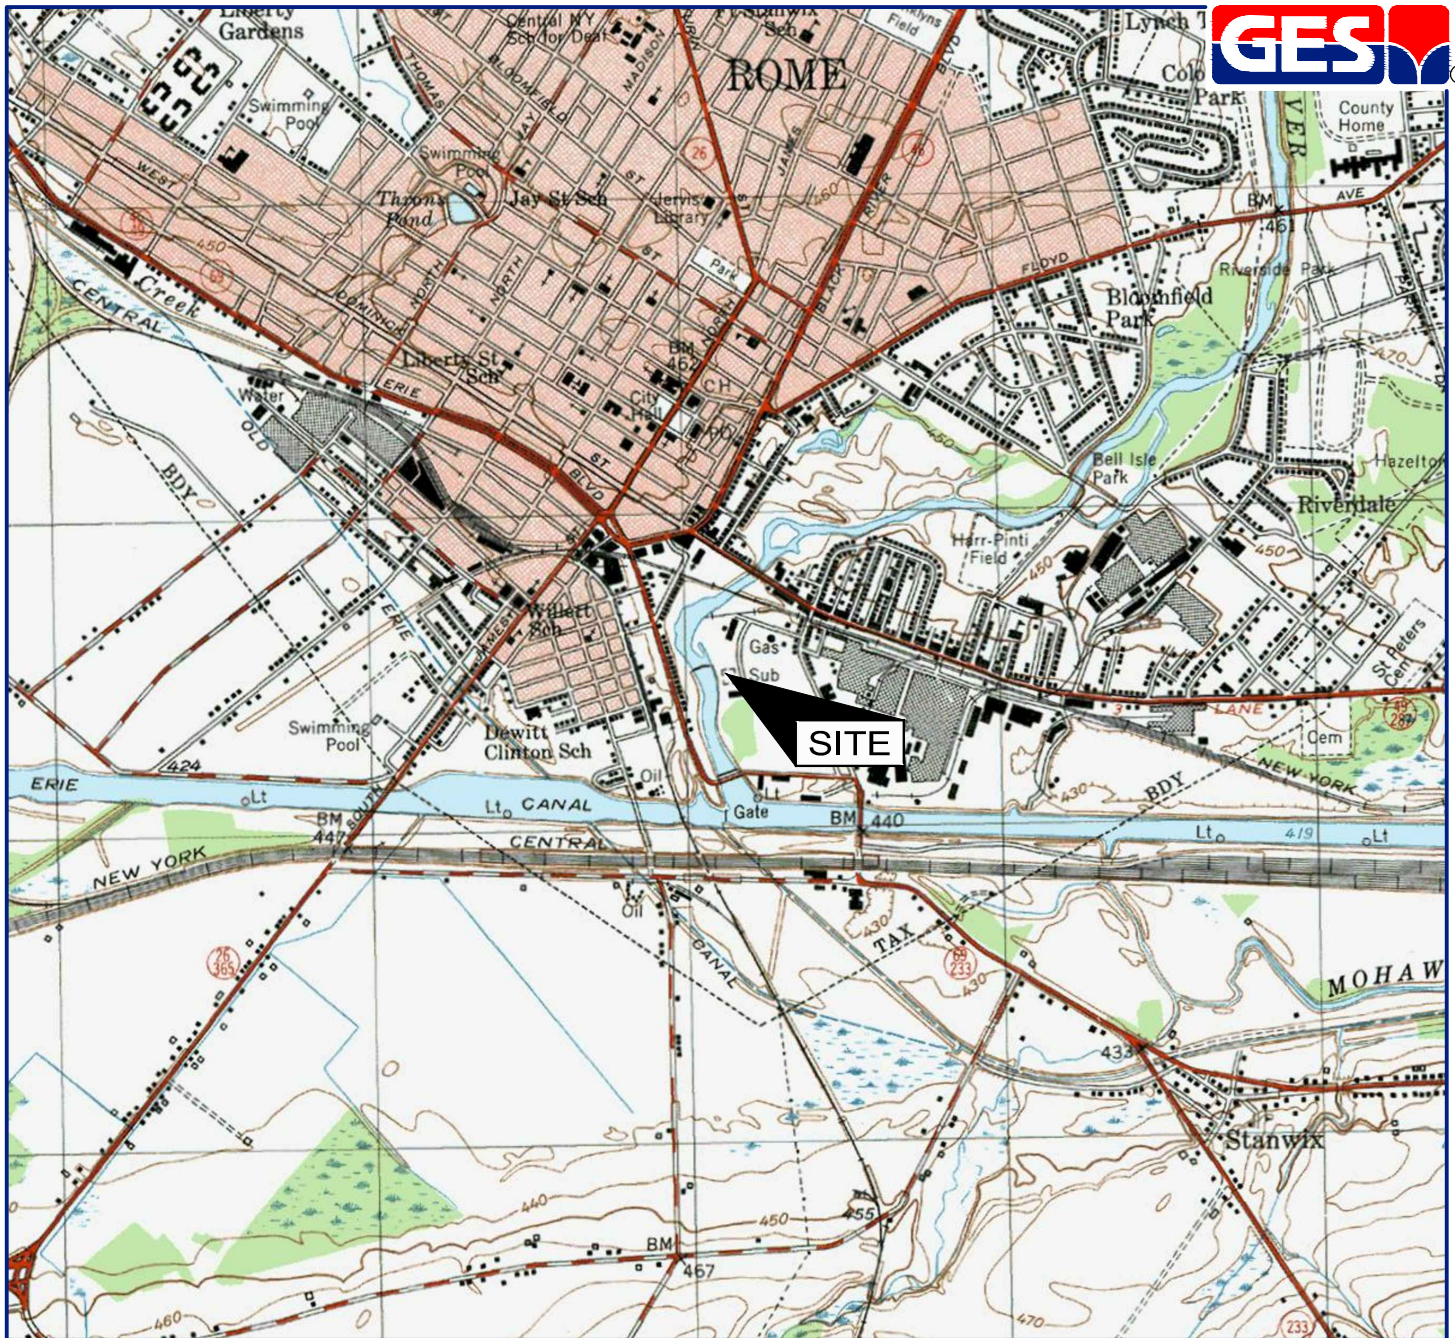



SOURCE: USGS 7.5 MINUTE SERIES
TOPOGRAPHIC QUADRANGLE 1955
ROME, NEW YORK
CONTOUR INTERVAL = 10'




QUADRANGLE LOCATION

DRAFTED BY: W.G.S.	SITE LOCATION MAP		
CHECKED BY:	NATIONAL GRID KINGSLEY AVENUE ROME, NEW YORK		
REVIEWED BY:			
NORTH 	Groundwater & Environmental Services, Inc. 5 TECHNOLOGY PLACE, SUITE 4, EAST SYRACUSE, NY 13057		
	SCALE IN FEET 	DATE 10-17-16	FIGURE 1

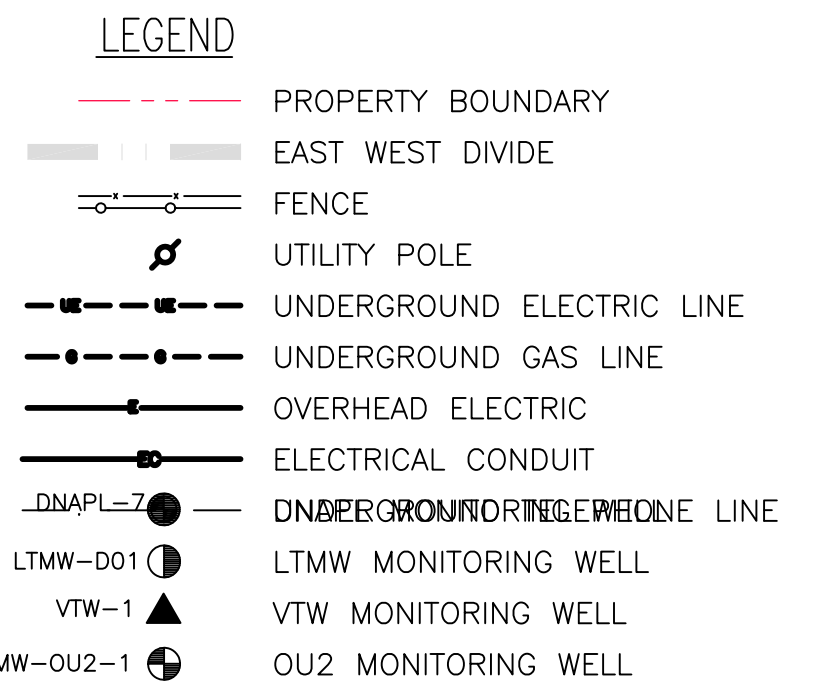

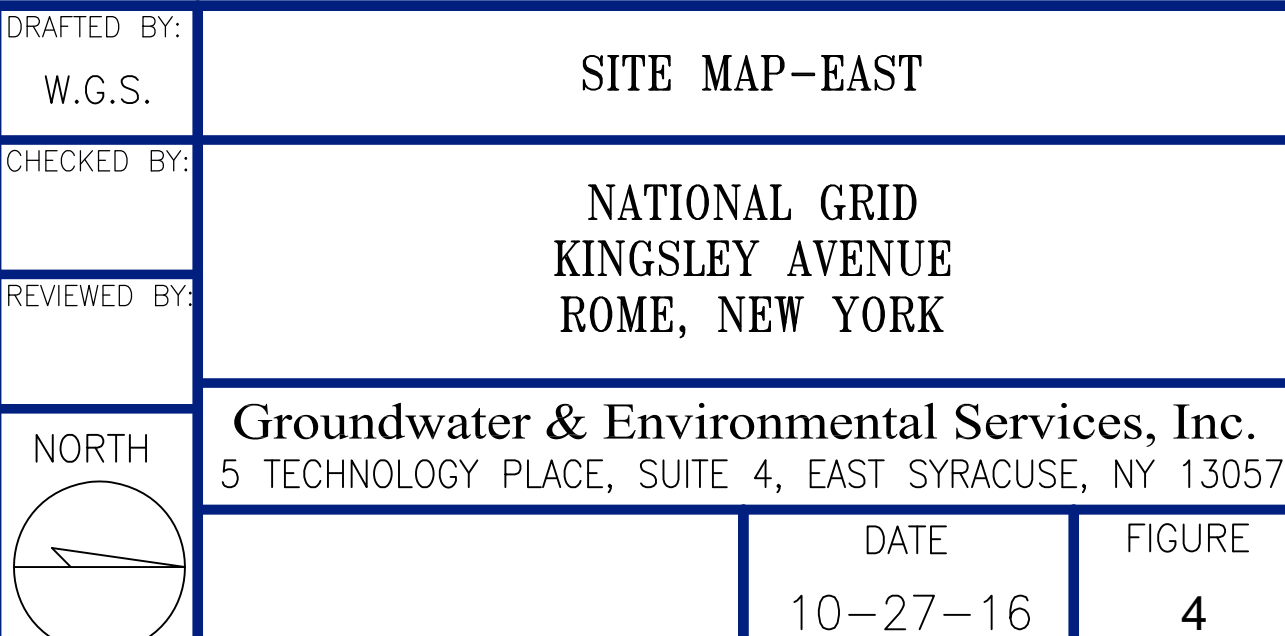

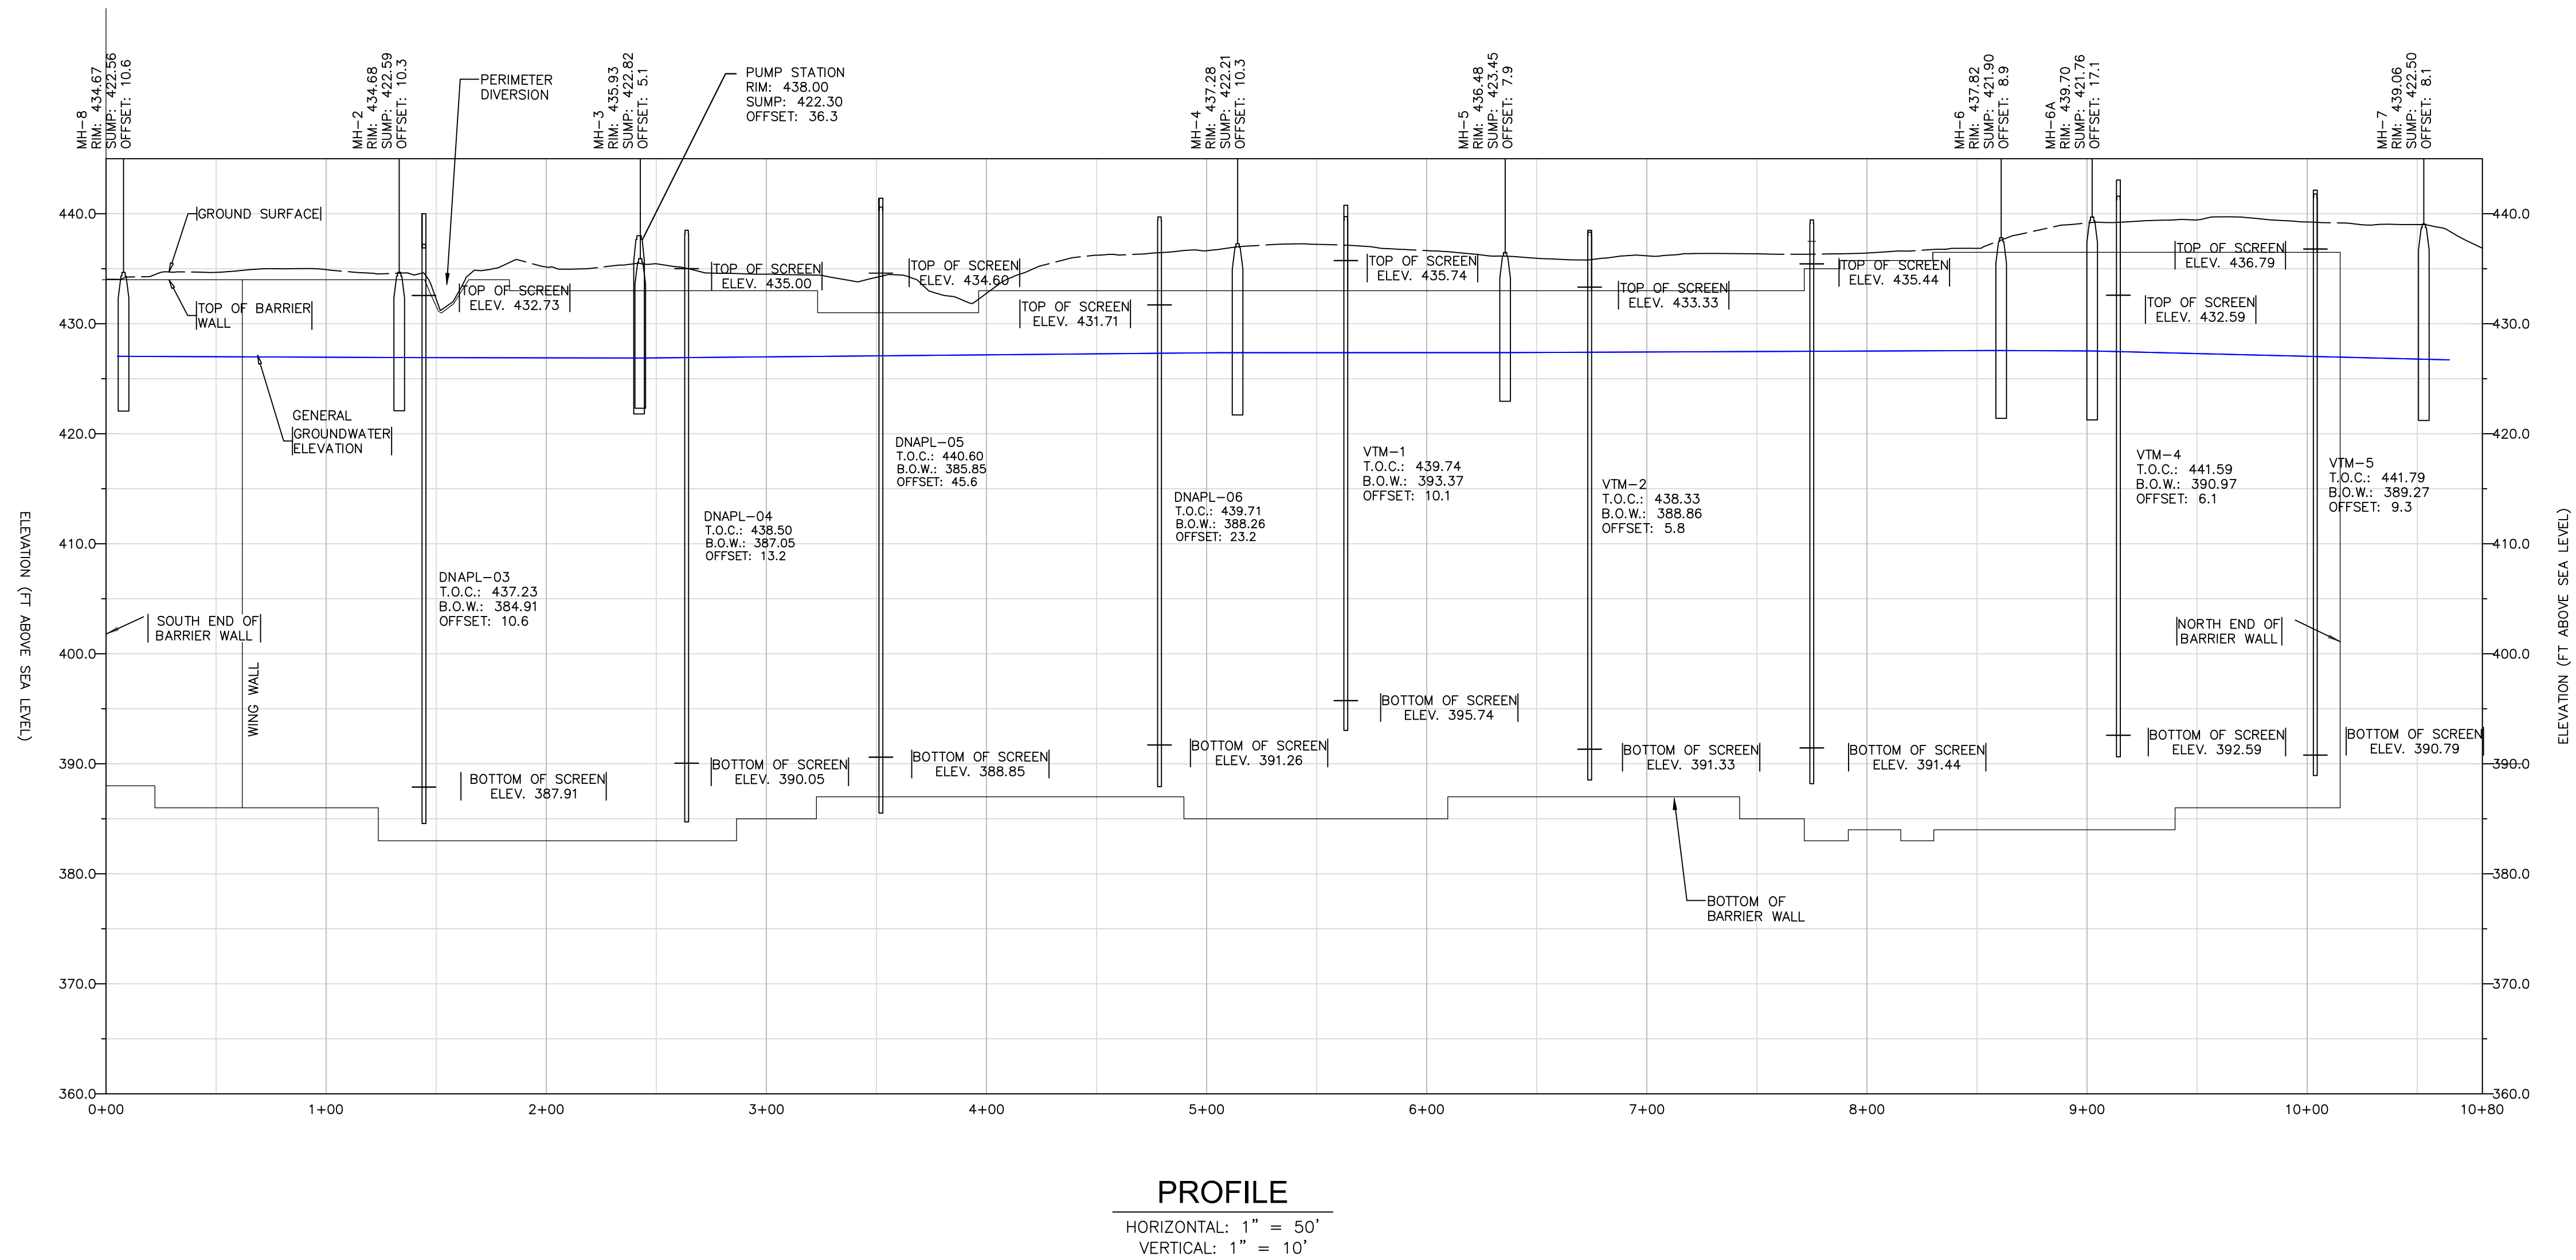

- LEGEND
- T.O.C. TOP OF CASING
 - B.O.W. BOTTOM OF WELL
 - TOP OF WALL
 - GROUNDWATER ELEVATION (JUNE 2012)

- NOTES:
- THE DEPTH OF THE BARRIER WALL IS APPROXIMATELY 50 FEET.
 - GROUNDWATER ELEVATION MEASUREMENTS TAKEN JUNE 2012.

DRAFTED BY:	BARRIER WALL PROFILE		
W.G.S.			
CHECKED BY:	NATIONAL GRID		
	KINGSLEY AVENUE		
REVIEWED BY:	ROME, NEW YORK		
NORTH	Groundwater & Environmental Services, Inc.		
	300 GATEWAY PARK DRIVE, NORTH SYRACUSE, NY 13212		
	DATE	FIGURE	
	10-17-16	5	



Tables

Table 2
Site Monitoring Wells

Well ID	Northing	Easting	Elevation of Ground	Elevation Top of Outer Casing	Elevation Top of Inner Casing	Nominal Well Diameter (inches)	Well Material	Well Sump Depth (ft)	Depth to Bottom of Well (ft)	Elevation Bottom of Well	Depth to Top Screen (ft)	Elevation Top Screen	Depth to Bottom Screen (ft)	Elevation Bottom Screen	Action
MW-OU2-1	1169964.4870	1121322.8873	433.5	435.72	435.48	4	SS	3.0	46.12	389.36	33.0	402.48	43.0	392.48	Quarterly Inspection; Quarterly Static Water Level Measurement
MW-OU2-2	1170149.8980	1121255.9363	433.9	436.40	436.06	4	SS	3.0	49.60	386.46	39.0	397.06	49.0	387.06	Quarterly Inspection; Quarterly Static Water Level Measurement
MW-OU2-3	1170101.2208	1121177.4485	430.63	433.25	432.96	4	SS	3.0	35.15	397.81	31.0	401.96	41.0	391.96	Quarterly Inspection; Quarterly Static Water Level Measurement (Surveyed in January 2014)
MW-OU2-4	1170149.6326	1121136.1811	430.63	433.05	432.88	4	SS	3.0	38.85	394.03	31.0	401.88	41.0	391.88	Quarterly Inspection; Quarterly Static Water Level Measurement (Surveyed in January 2014)
MW-OU2-5	1170167.9650	1121091.2658	431.23	433.77	433.46	4	SS	3.0	36.34	397.12	31.0	402.46	41.0	392.46	Quarterly Inspection; Quarterly Static Water Level Measurement (Surveyed in January 2014)
DNAPL-02	1169976.8400	1121338.4483	434.6	436.81	NA	6	SS	3.0	50.40	386.41	4.0	432.81	46.0	389.41	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-03	1170021.7760	1121329.2613	434.6	437.23	NA	6	SS	3.0	52.32	384.91	4.5	432.73	46.5	387.91	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-04	1170138.5720	1121289.3033	436.3	438.50	NA	6	SS	3.0	51.45	387.05	3.5	435.00	47.5	390.05	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-05	1170223.6230	1121251.9083	438.4	440.60	NA	6	SS	3.0	54.75	385.85	6.0	434.60	50.0	388.85	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-06	1170309.3920	1121212.9643	438	439.71	NA	6	SS	3.0	51.45	388.26	8.0	431.71	48.0	391.26	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-07	1170186.6060	1121522.7453	439.4	441.46	NA	6	SS	3.0	53.60	387.86	5.0	436.46	55.5	390.86	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-08	1170230.3820	1121390.3173	439.6	441.80	NA	6	SS	3.0	58.01	383.79	7.0	434.80	53.0	386.79	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
DNAPL-09	1170267.0450	1121351.1333	440.1	442.63	NA	6	SS	3.0	57.58	385.05	5.0	437.63	53.2	388.05	Quarterly Inspection; Quarterly Static Water Level Measurement; DNAPL Monitoring/Collection
VTM-1	1170393.9230	1121200.2643	437.7	439.74	NA	6	SS	NA	46.37	393.37	4.0	435.74	44.0	395.74	Quarterly Inspection; Quarterly Static Water Level Measurement
VTM-2	1170482.8870	1121229.5033	436.1	438.33	NA	6	SS	NA	49.47	388.86	5.0	433.33	47.0	391.33	Quarterly Inspection; Quarterly Static Water Level Measurement
VTM-3	1170541.8140	1121311.1743	437.1	439.44	NA	6	SS	NA	50.91	388.53	4.0	435.44	48.0	391.44	Quarterly Inspection; Quarterly Static Water Level Measurement
VTM-4	1170558.5060	1121416.3693	439.3	441.59	NA	6	SS	NA	50.62	390.97	9.0	432.59	49.0	392.59	Quarterly Inspection; Quarterly Static Water Level Measurement
VTM-5	1170616.4890	1121483.6873	439.8	441.79	NA	6	SS	NA	52.52	389.27	5.0	436.79	51.0	390.79	Quarterly Inspection; Quarterly Static Water Level Measurement
LTMW-D01	1169920.9810	1121340.1793	432.7	434.90	434.80	2	PVC	NA	46.84	387.96	34.0	400.80	44.0	390.80	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S01	1169936.2970	1121336.3233	433.2	435.52	435.10	2	PVC	NA	16.92	418.18	5.0	430.10	15.0	420.10	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-D02	1170077.3450	1121296.6853	434.2	436.74	436.60	2	PVC	NA	40.29	396.31	30.0	406.60	40.0	396.60	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S02	1170087.0350	1121294.4073	434.3	436.79	436.59	2	PVC	NA	17.98	418.61	5.0	431.59	15.0	421.59	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-D03	1170208.0726	1121183.8138	429.2	431.27	431.13	2	PVC	NA	40.73	390.40	29.0	402.13	39.0	392.13	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S03	1170200.4014	1121188.2719	429.3	431.43	431.29	2	PVC	NA	13.70	417.59	2.0	429.29	12.0	419.29	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-D04	1170444.7690	1121162.3583	434.9	437.18	436.88	2	PVC	NA	46.36	390.52	34.0	402.88	44.0	392.88	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S04	1170434.1910	1121164.5883	435.6	437.24	437.09	2	PVC	NA	17.26	419.83	5.0	432.09	15.0	422.09	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-D05	1170572.7400	1121323.4973	435.7	437.78	437.58	2	PVC	NA	46.53	391.05	35.0	402.58	45.0	392.58	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S05	1170567.9900	1121317.5703	435.9	437.92	437.77	2	PVC	NA	16.83	420.94	5.0	432.77	15.0	422.77	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-D06	1170625.7620	1121557.7643	440.2	441.70	441.55	2	PVC	NA	52.22	389.33	40.0	401.55	50.0	391.55	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S06	1170637.4230	1121564.0263	439.7	441.64	441.52	2	PVC	NA	17.60	423.92	5.0	436.52	15.0	426.52	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S07	1170113.1090	1121525.3273	438	439.94	439.70	2	PVC	NA	17.82	421.88	5.0	434.70	15.0	424.70	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S08	1170434.0830	1121518.2593	442.4	443.81	443.63	2	PVC	NA	17.39	426.24	5.0	438.63	15.0	428.63	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S09	1170469.4300	1121969.1733	437.6	439.79	439.54	2	PVC	NA	16.92	422.62	5.0	434.54	15.0	424.54	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling
LTMW-S10	1170123.6800	1121817.1213	437.4	439.67	439.42	2	PVC	NA	17.18	422.24	5.0	434.42	15.0	424.42	Quarterly Inspection; Quarterly Static Water Level Measurement; Quarterly Sampling

Notes:

- 1) Shallow monitoring wells were sampled with a low flow peristaltic pump with battery pack
- 2) Deep monitoring wells were sampled with a low flow submersible pump with generator
- 3) Static water level measurements were taken from top of inner casing. If the well has no inner casing, the measurement will be taken from the top of outer casing

Table 3

Historical Groundwater Data
Operable Unit 2 Wells

Well			Well			Well			Well			Well		
MW-OU2-1			MW-OU2-2			MW-OU2-3			MW-OU2-4			MW-OU2-5		
TOC = 435.72			TOC = 436.40			TOC = 432.96			TOC = 432.88			TOC = 433.46		
Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.
12/03/21	8.95	426.77	12/03/21	9.93	426.47	12/03/21	6.50	426.46	12/03/21	6.45	426.43	12/03/21	7.05	426.41
09/22/21	4.35	431.37	09/22/21	10.25	426.15	09/22/21	6.92	426.04	09/22/21	6.89	425.99	09/22/21	7.62	425.84
06/09/21	10.34	425.38	06/09/21	9.45	426.95	06/09/21	7.03	425.93	06/09/21	6.98	425.90	06/09/21	7.89	425.57
03/18/21	9.29	426.43	03/18/21	10.16	426.24	03/18/21	6.87	426.09	03/18/21	6.81	426.07	03/18/21	7.53	425.93
12/03/20	9.40	426.32	12/03/20	10.29	426.11	12/03/20	6.91	426.05	12/03/20	6.88	426.00	12/03/20	7.59	425.87
09/11/20	9.66	426.06	09/11/20	10.62	425.78	09/11/20	7.25	425.71	09/11/20	7.20	425.68	09/11/20	7.91	425.55
06/11/20	10.06	425.66	06/11/20	10.82	425.58	06/11/20	7.10	425.86	06/11/20	7.10	425.78	06/11/20	7.75	425.71
03/20/20	8.10	427.62	03/20/20	9.25	427.15	03/20/20	6.40	426.56	03/20/20	5.40	427.48	03/20/20	6.05	427.41
12/05/19	9.20	426.52	12/05/19	10.10	426.30	12/05/19	6.70	426.26	12/05/19	6.68	426.20	12/05/19	7.37	426.09
09/19/19	9.54	426.18	09/19/19	10.90	425.50	09/19/19	6.95	426.01	09/19/19	6.90	425.98	09/19/19	7.60	425.86
06/06/19	8.90	426.82	06/06/19	9.60	426.80	06/06/19	6.18	426.78	06/06/19	6.05	426.83	06/06/19	6.23	427.23
03/21/19	8.65	427.07	03/21/19	9.80	426.60	03/21/19	6.00	426.96	03/21/19	5.90	426.98	03/21/19	6.50	426.96
12/05/18	8.90	426.82	12/05/18	9.05	427.35	12/05/18	5.69	427.27	12/05/18	5.60	427.28	12/05/18	6.25	427.21
09/13/18	9.58	426.14	09/13/18	10.40	426.00	09/13/18	7.02	425.94	09/13/18	7.06	425.82	09/13/18	7.72	425.74
06/07/18	9.53	426.19	06/07/18	10.25	426.15	06/07/18	7.90	425.06	06/07/18	6.90	425.98	06/07/18	7.56	425.90
03/22/18	9.15	426.57	03/22/18	9.85	426.55	03/22/18	6.60	426.36	03/22/18	6.55	426.33	03/22/18	7.20	426.26
12/06/17	9.37	426.35	12/06/17	9.96	426.44	12/06/17	6.60	426.36	12/06/17	6.50	426.38	12/06/17	7.20	426.26
09/01/17	9.53	426.19	09/01/17	10.35	426.05	09/01/17	NM	-	09/01/17	6.98	425.90	09/01/17	7.73	425.73
06/23/17	9.35	426.37	06/23/17	10.02	426.38	06/23/17	7.10	425.86	06/23/17	6.70	426.18	06/23/17	7.15	426.31
03/08/17	8.68	427.04	03/08/17	5.94	430.46	03/08/17	5.93	427.03	03/08/17	5.94	426.94	03/08/17	6.62	426.84
12/15/16	8.91	426.81	12/15/16	9.80	426.60	12/15/16	6.42	426.54	12/15/16	6.35	426.53	12/15/16	7.02	426.44
09/19/16	9.58	426.14	09/19/16	10.52	425.88	09/19/16	7.29	425.67	09/19/16	7.15	425.73	09/19/16	7.84	425.62
06/07/16	9.45	426.27	06/07/16	10.28	426.12	06/07/16	6.95	426.01	06/07/16	6.87	426.01	06/07/16	7.57	425.89
03/07/16	8.45	427.27	03/07/16	9.28	427.12	03/07/16	5.91	427.05	03/07/16	5.82	427.06	03/07/16	6.49	426.97
12/02/15	9.30	426.42	12/02/15	10.19	426.21	12/02/15	6.85	426.11	12/02/15	6.77	426.11	12/02/15	7.44	426.02
09/16/15	9.66	426.06	09/16/15	10.47	425.93	09/16/15	7.15	425.81	09/16/15	7.05	425.83	09/16/15	7.74	425.72
06/03/15	9.34	426.38	06/03/15	9.73	426.67	06/03/15	6.41	426.55	06/03/15	6.34	426.54	06/03/15	6.95	426.51
04/08/15	8.63	427.09	04/08/15	9.29	427.11	04/08/15	6.14	426.82	04/08/15	5.96	426.92	04/08/15	6.98	426.48
12/01/14	9.32	426.40	12/01/14	9.84	426.56	12/01/14	6.49	426.47	12/01/14	6.41	426.47	12/01/14	7.08	426.38
09/10/14	9.49	426.23	09/10/14	9.89	426.51	09/10/14	7.02	425.94	09/10/14	6.95	425.93	09/10/14	7.63	425.83
06/12/14	9.58	426.14	06/12/14	10.33	426.07	06/12/14	6.99	425.97	06/12/14	6.94	425.94	06/12/14	7.63	425.83
03/25/14	9.12	426.60	03/25/14	10.22	426.18	03/25/14	6.75	426.21	03/25/14	6.85	426.03	03/25/14	7.24	426.22
12/12/13	8.47	427.25	12/12/13	9.35	427.05	12/12/13	5.92	427.04	12/12/13	5.84	427.04	12/12/13	6.51	426.95
09/23/13	9.52	426.20	09/23/13	10.32	426.08	09/23/13	7.08	425.88	09/23/13	6.98	425.90	09/23/13	7.63	425.83
06/10/13	8.46	427.26	06/10/13	9.32	427.08	06/10/13	5.78	427.18	06/10/13	5.68	427.20	06/10/13	5.35	428.11
03/27/13	9.30	426.42	03/27/13	10.11	426.29	03/27/13	6.78	426.18	03/27/13	6.95	425.93	03/27/13	7.42	426.04
12/03/12	9.49	426.23	12/03/12	10.33	426.07	12/03/12	7.02	425.94	12/03/12	6.93	425.95	12/03/12	7.70	425.76
09/12/12	9.75	425.97	09/12/12	10.63	425.77	09/12/12	7.32	425.64	09/12/12	7.25	425.63	09/12/12	8.02	425.44
06/18/12	9.51	426.21	06/18/12	10.36	426.04	06/18/12	7.05	425.91	06/18/12	6.95	425.93	06/18/12	7.69	425.77
03/19/12	8.88	426.84	03/19/12	9.79	426.61	03/19/12	6.46	426.50	03/19/12	6.32	426.56	03/19/12	7.13	426.33
12/05/11	9.10	426.62	12/05/11	9.84	426.56	12/05/11	6.72	426.24	12/05/11	6.73	426.15	12/05/11	7.50	425.96
09/26/11	9.31	426.41	09/26/11	10.11	426.29	09/26/11	6.64	426.32	09/26/11	6.68	426.20	09/26/11	7.35	426.11
06/13/11	9.29	426.43	06/13/11	10.07	426.33	06/13/11	6.71	426.25	06/13/11	7.87	425.01	06/13/11	7.33	426.13
03/29/11	8.64	427.08	03/29/11	9.43	426.97	03/29/11	6.04	426.92	03/29/11	5.93	426.95	03/29/11	6.68	426.78

Notes:

TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
El. = Elevation in Feet

Table 3
Historical Groundwater Data
DNAPL Wells

Well			Well			Well			Well		
DNAPL-02			DNAPL-03			DNAPL-04			DNAPL-05		
Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.
12/03/21	9.08	427.73	12/03/21	9.38	427.85	12/03/21	10.56	427.94	12/03/21	12.73	427.87
09/22/21	9.69	427.12	09/22/21	9.06	428.17	09/22/21	11.23	427.27	09/22/21	13.36	427.24
06/09/21	9.43	427.38	06/09/21	9.72	427.51	06/09/21	10.98	427.52	06/09/21	13.12	427.48
03/18/21	9.32	427.49	03/18/21	9.54	427.69	03/18/21	10.77	427.73	03/18/21	13.96	426.64
12/03/20	9.40	427.41	12/03/20	9.76	427.47	12/03/20	10.90	427.60	12/03/20	13.05	427.55
09/11/20	7.95	428.86	09/11/20	9.35	427.88	09/11/20	11.65	426.85	09/11/20	13.13	427.47
06/11/20	10.06	426.75	06/11/20	10.29	426.94	06/11/20	11.67	426.83	06/11/20	13.76	426.84
03/20/20	8.10	428.71	03/20/20	8.55	428.68	03/20/20	9.70	428.80	03/20/20	11.32	429.28
12/05/19	9.20	427.61	12/05/19	9.60	427.63	12/05/19	10.85	427.65	12/05/19	12.92	427.68
09/19/19	9.54	427.27	09/19/19	8.85	428.38	09/19/19	11.14	427.36	09/19/19	13.20	427.40
06/06/19	9.10	427.71	06/06/19	9.25	427.98	06/06/19	10.60	427.90	06/06/19	12.70	427.90
03/21/19	8.20	428.61	03/21/19	8.45	428.78	03/21/19	9.70	428.80	03/21/19	11.80	428.80
12/05/18	8.10	428.71	12/05/18	8.70	428.53	12/05/18	9.65	428.85	12/05/18	11.75	428.85
09/13/18	9.60	427.21	09/13/18	9.70	427.53	09/13/18	11.00	427.50	09/13/18	13.08	427.52
06/07/18	9.70	427.11	06/07/18	10.00	427.23	06/07/18	11.26	427.24	06/07/18	13.34	427.26
03/22/18	9.35	427.46	03/22/18	9.60	427.63	03/22/18	10.90	427.60	03/22/18	12.99	427.61
12/06/17	9.00	427.81	12/06/17	9.31	427.92	12/06/17	10.59	427.91	12/06/17	12.65	427.95
09/01/17	9.75	427.06	09/01/17	10.00	427.23	09/01/17	11.36	427.14	09/01/17	13.44	427.16
06/23/17	9.30	427.51	06/23/17	9.56	427.67	06/23/17	10.90	427.60	06/23/17	13.00	427.60
03/08/17	8.92	427.89	03/08/17	9.19	428.04	03/08/17	10.51	427.99	03/08/17	12.57	428.03
12/15/16	8.33	428.48	12/15/16	8.60	428.63	12/15/16	9.89	428.61	12/15/16	11.98	428.62
09/19/16	9.56	427.25	09/19/16	9.88	427.35	09/19/16	11.20	427.30	09/19/16	13.27	427.33
06/07/16	9.41	427.40	06/07/16	9.73	427.50	06/07/16	11.05	427.45	06/07/16	13.12	427.48
03/07/16	8.45	428.36	03/07/16	8.73	428.50	03/07/16	10.05	428.45	03/07/16	12.10	428.50
12/02/15	9.41	427.40	12/02/15	9.71	427.52	12/02/15	11.01	427.49	12/02/15	13.09	427.51
09/16/15	9.91	426.90	09/16/15	10.21	427.02	09/16/15	11.51	426.99	09/16/15	13.58	427.02
06/03/15	8.33	428.48	06/03/15	8.84	428.39	06/03/15	10.15	428.35	06/03/15	12.24	428.36
04/08/15	8.39	428.42	04/08/15	8.68	428.55	04/08/15	9.96	428.54	04/08/15	12.07	428.53
12/01/14	9.16	427.65	12/01/14	9.45	427.78	12/01/14	10.75	427.75	12/01/14	12.81	427.79
09/10/14	9.25	427.56	09/10/14	9.55	427.68	09/10/14	10.62	427.88	09/10/14	12.70	427.90
06/12/14	9.90	426.91	06/12/14	10.20	427.03	06/12/14	11.41	427.09	06/12/14	13.56	427.04
03/25/14	9.52	427.29	03/25/14	9.81	427.42	03/25/14	11.15	427.35	03/25/14	13.21	427.39
12/12/13	8.71	428.10	12/12/13	9.03	428.20	12/12/13	10.35	428.15	12/12/13	12.41	428.19
09/23/13	9.92	426.89	09/23/13	10.25	426.98	09/23/13	11.56	426.94	09/23/13	13.61	426.99
06/10/13	8.27	428.54	06/10/13	8.62	428.61	06/10/13	9.91	428.59	06/10/13	11.98	428.62
03/27/13	9.51	427.30	03/27/13	9.81	427.42	03/27/13	11.15	427.35	03/27/13	13.21	427.39
12/03/12	9.19	427.62	12/03/12	10.10	427.13	12/03/12	11.45	427.05	12/03/12	13.48	427.12
09/12/12	10.14	426.67	09/12/12	10.48	426.75	09/12/12	11.81	426.69	09/12/12	13.84	426.76
06/18/12	9.46	427.35	06/18/12	9.80	427.43	06/18/12	11.15	427.35	06/18/12	13.24	427.36
03/19/12	9.02	427.79	03/19/12	9.35	427.88	03/19/12	10.69	427.81	03/19/12	12.74	427.86
12/05/11	9.46	427.35	12/05/11	9.79	427.44	12/05/11	11.13	427.37	12/05/11	13.30	427.30
09/26/11	9.36	427.45	09/26/11	9.70	427.53	09/26/11	11.09	427.41	09/26/11	13.08	427.52
06/13/11	9.18	427.63	06/13/11	9.54	427.69	06/13/11	10.84	427.66	06/13/11	12.89	427.71
03/29/11	8.41	428.40	03/29/11	8.72	428.51	03/29/11	10.05	428.45	03/29/11	12.11	428.49

Notes:
 TOC = Top of Inner Well Casing Elevation in Feet
 DTW = Depth to Water from Top of Casing in Feet
 El. = Elevation in Feet

Table 3
Historical Groundwater Data
DNAPL Wells

Well	DNAPL-06		Well	DNAPL-07		Well	DNAPL-08		Well	DNAPL-09	
	TOC =	439.71		TOC =	441.46		TOC =	441.80		TOC =	442.63
Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.
12/03/21	11.86	427.85	12/03/21	12.21	429.25	12/03/21	12.89	428.91	12/03/21	13.8	428.83
09/22/21	12.47	427.24	09/22/21	12.86	428.60	09/22/21	13.39	428.41	09/22/21	14.33	428.30
06/09/21	12.24	427.47	06/09/21	12.78	428.68	06/09/21	13.29	428.51	06/09/21	14.19	428.44
03/18/21	12.06	427.65	03/18/21	12.56	428.90	03/18/21	13.04	428.76	03/18/21	13.95	428.68
12/03/20	12.16	427.55	12/03/20	12.91	428.55	12/03/20	13.28	428.52	12/03/20	14.19	428.44
09/11/20	12.80	426.91	09/11/20	13.57	427.89	09/11/20	14.02	427.78	09/11/20	14.82	427.81
06/11/20	12.73	426.98	06/11/20	13.36	428.10	06/11/20	13.85	427.95	06/11/20	14.73	427.90
03/20/20	10.90	428.81	03/20/20	11.80	429.66	03/20/20	12.10	429.70	03/20/20	13.05	429.58
12/05/19	11.96	427.75	12/05/19	12.81	428.65	12/05/19	13.25	428.55	12/05/19	14.15	428.48
09/19/19	12.27	427.44	09/19/19	13.14	428.32	09/19/19	13.58	428.22	09/19/19	14.50	428.13
06/06/19	6.23	433.48	06/06/19	12.25	429.21	06/06/19	12.75	429.05	06/06/19	13.70	428.93
03/21/19	10.90	428.81	03/21/19	11.50	429.96	03/21/19	12.00	429.80	03/21/19	12.90	429.73
12/05/18	10.70	429.01	12/05/18	11.70	429.76	12/05/18	12.10	429.70	12/05/18	13.00	429.63
09/13/18	12.15	427.56	09/13/18	13.20	428.26	09/13/18	13.65	428.15	09/13/18	14.50	428.13
06/07/18	12.33	427.38	06/07/18	13.18	428.28	06/07/18	13.61	428.19	06/07/18	14.50	428.13
03/22/18	12.00	427.71	03/22/18	12.67	428.79	03/22/18	13.16	428.64	03/22/18	14.06	428.57
12/06/17	11.74	427.97	12/06/17	12.55	428.91	12/06/17	13.00	428.80	12/06/17	13.91	428.72
09/01/17	12.40	427.31	09/01/17	13.40	428.06	09/01/17	13.80	428.00	09/01/17	14.69	427.94
06/23/17	11.97	427.74	06/23/17	12.70	428.76	06/23/17	13.15	428.65	06/23/17	14.07	428.56
03/08/17	11.57	428.14	03/08/17	12.37	429.09	03/08/17	12.75	429.05	03/08/17	13.65	428.98
12/15/16	11.05	428.66	12/15/16	10.80	430.66	12/15/16	12.24	429.56	12/15/16	13.15	429.48
09/19/16	12.31	427.40	09/19/16	13.22	428.24	09/19/16	13.64	428.16	09/19/16	14.55	428.08
06/07/16	12.15	427.56	06/07/16	12.98	428.48	06/07/16	13.44	428.36	06/07/16	14.32	428.31
03/07/16	11.17	428.54	03/07/16	11.91	429.55	03/07/16	12.36	429.44	03/07/16	13.25	429.38
12/02/15	12.21	427.50	12/02/15	13.03	428.43	12/02/15	13.49	428.31	12/02/15	14.39	428.24
09/16/15	12.69	427.02	09/16/15	13.32	428.14	09/16/15	13.78	428.02	09/16/15	14.67	427.96
06/03/15	11.36	428.35	06/03/15	11.88	429.58	06/03/15	12.37	429.43	06/03/15	13.29	429.34
04/08/15	11.19	428.52	04/08/15	11.71	429.75	04/08/15	12.19	429.61	04/08/15	13.12	429.51
12/01/14	11.92	427.79	12/01/14	12.55	428.91	12/01/14	12.98	428.82	12/01/14	13.88	428.75
09/10/14	11.76	427.95	09/10/14	12.91	428.55	09/10/14	13.35	428.45	09/10/14	14.29	428.34
06/12/14	12.61	427.10	06/12/14	13.12	428.34	06/12/14	13.60	428.20	06/12/14	14.57	428.06
03/25/14	12.25	427.46	03/25/14	13.01	428.45	03/25/14	13.44	428.36	03/25/14	14.21	428.42
12/12/13	11.51	428.20	12/12/13	12.19	429.27	12/12/13	12.63	429.17	12/12/13	13.51	429.12
09/23/13	12.71	427.00	09/23/13	13.26	428.20	09/23/13	13.75	428.05	09/23/13	13.91	428.72
06/10/13	11.07	428.64	06/10/13	11.85	429.61	06/10/13	12.28	429.52	06/10/13	13.16	429.47
03/27/13	12.31	427.40	03/27/13	12.80	428.66	03/27/13	13.26	428.54	03/27/13	14.20	428.43
12/03/12	12.61	427.10	12/03/12	13.75	427.71	12/03/12	13.71	428.09	12/03/12	14.65	427.98
09/12/12	12.91	426.80	09/12/12	13.76	427.70	09/12/12	14.21	427.59	09/12/12	15.11	427.52
06/18/12	12.28	427.43	06/18/12	13.11	428.35	06/18/12	13.56	428.24	06/18/12	14.47	428.16
03/19/12	11.84	427.87	03/19/12	12.61	428.85	03/19/12	13.95	427.85	03/19/12	13.05	429.58
12/05/11	12.28	427.43	12/05/11	12.88	428.58	12/05/11	13.36	428.44	12/05/11	14.28	428.35
09/26/11	10.18	429.53	09/26/11	12.86	428.60	09/26/11	13.35	428.45	09/26/11	14.25	428.38
06/13/11	11.94	427.77	06/13/11	12.84	428.62	06/13/11	13.27	428.53	06/13/11	14.14	428.49
03/29/11	11.12	428.59	03/29/11	12.25	429.21	03/29/11	12.66	429.14	03/29/11	13.75	428.88

Notes:
TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
El. = Elevation in Feet

Table 3
Historical Groundwater Data
Trench Wells

Well	VTM-1		Well	VTM-2		Well	VTM-3		Well	VTM-4		Well	VTM-5	
	TOC =	439.74		TOC =	438.33		TOC =	439.44		TOC =	441.59		TOC =	441.79
Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.	Date	DTW	Water El.
12/03/21	11.62	428.12	12/03/21	10.01	428.32	12/03/21	11.16	428.28	12/03/21	13.03	428.56	12/03/21	13.15	428.64
09/22/21	12.28	427.46	09/22/21	10.73	427.60	09/22/21	11.8	427.64	09/22/21	13.64	427.95	09/22/21	13.74	428.05
06/09/21	12.10	427.64	06/09/21	10.57	427.76	06/09/21	11.74	427.70	06/09/21	13.54	428.05	06/09/21	13.68	428.11
03/18/21	11.71	428.03	03/18/21	10.11	428.22	03/18/21	11.27	428.17	03/18/21	13.24	428.35	03/18/21	13.39	428.40
12/03/20	12.02	427.72	12/03/20	10.54	427.79	12/03/20	11.70	427.74	12/03/20	13.54	428.05	12/03/20	13.62	428.17
09/11/20	12.73	427.01	09/11/20	11.18	427.15	09/11/20	12.22	427.22	09/11/20	14.07	427.52	09/11/20	14.26	427.53
06/11/20	10.06	429.68	06/11/20	10.85	427.48	06/11/20	11.97	427.47	06/11/20	13.85	427.74	06/11/20	14.00	427.79
03/20/20	8.10	431.64	03/20/20	9.10	429.23	03/20/20	10.20	429.24	03/20/20	12.05	429.54	03/20/20	12.15	429.64
12/05/19	9.20	430.54	12/05/19	10.22	428.11	12/05/19	11.39	428.05	12/05/19	13.44	428.15	12/05/19	13.61	428.18
09/19/19	9.54	430.20	09/19/19	10.69	427.64	09/19/19	11.86	427.58	09/19/19	13.68	427.91	09/19/19	13.88	427.91
06/06/19	11.60	428.14	06/06/19	10.00	428.33	06/06/19	11.20	428.24	06/06/19	13.00	428.59	06/06/19	6.23	435.56
03/21/19	10.60	429.14	03/21/19	9.00	429.33	03/21/19	10.20	429.24	03/21/19	12.50	429.09	03/21/19	12.25	429.54
12/05/18	10.55	429.19	12/05/18	8.95	429.38	12/05/18	10.05	429.39	12/05/18	12.00	429.59	12/05/18	12.15	429.64
09/13/18	12.20	427.54	09/13/18	10.65	427.68	09/13/18	11.80	427.64	09/13/18	13.70	427.89	09/13/18	13.85	427.94
06/07/18	12.14	427.60	03/22/18	10.46	427.87	03/22/18	11.62	427.82	06/07/18	13.61	427.98	03/22/18	13.75	428.04
03/22/18	11.86	427.88	03/22/18	10.41	427.92	03/22/18	11.36	428.08	03/22/18	13.31	428.28	03/22/18	13.45	428.34
12/06/17	11.65	428.09	12/06/17	10.07	428.26	12/06/17	11.22	428.22	12/06/17	13.17	428.42	12/06/17	13.32	428.47
09/01/17	12.10	427.64	09/01/17	10.40	427.93	09/01/17	10.55	428.89	09/01/17	13.60	427.99	09/01/17	13.77	428.02
06/23/17	11.80	427.94	06/23/17	10.10	428.23	06/23/17	11.21	428.23	06/23/17	13.15	428.44	06/23/17	13.29	428.50
03/08/17	11.24	428.50	03/08/17	9.52	428.81	03/08/17	10.65	428.79	03/08/17	12.58	429.01	03/08/17	12.76	429.03
12/15/16	10.99	428.75	12/15/16	9.33	429.00	12/15/16	10.49	428.95	12/15/16	12.49	429.10	12/15/16	12.54	429.25
09/19/16	12.23	427.51	09/19/16	10.56	427.77	09/19/16	11.71	427.73	09/19/16	13.65	427.94	09/19/16	13.82	427.97
06/07/16	11.98	427.76	06/07/16	10.29	428.04	06/07/16	11.43	428.01	06/07/16	13.44	428.15	06/07/16	13.61	428.18
03/07/16	10.98	428.76	03/07/16	9.25	429.08	03/07/16	10.36	429.08	03/07/16	12.32	429.27	03/07/16	12.49	429.30
12/02/15	12.12	427.62	12/02/15	10.53	427.80	12/02/15	11.68	427.76	12/02/15	13.58	428.01	12/02/15	13.74	428.05
09/16/15	12.55	427.19	09/16/15	10.75	427.58	09/16/15	11.85	427.59	09/16/15	13.73	427.86	09/16/15	14.67	427.12
06/03/15	11.21	428.53	06/03/15	9.55	428.78	06/03/15	10.72	428.72	06/03/15	12.68	428.91	06/03/15	12.86	428.93
04/08/15	11.06	428.68	04/08/15	9.49	428.84	04/08/15	11.65	427.79	04/08/15	12.65	428.94	04/08/15	12.81	428.98
12/01/14	11.55	428.19	12/01/14	9.79	428.54	12/01/14	10.92	428.52	12/01/14	12.91	428.68	12/01/14	13.09	428.70
09/10/14	11.62	428.12	09/10/14	9.91	428.42	09/10/14	11.10	428.34	09/10/14	13.14	428.45	09/10/14	13.31	428.48
06/12/14	11.94	427.80	06/12/14	10.28	428.05	06/12/14	11.45	427.99	06/12/14	13.48	428.11	06/12/14	13.63	428.16
03/25/14	11.69	428.05	03/25/14	10.01	428.32	03/25/14	11.17	428.27	03/25/14	13.32	428.27	03/25/14	13.35	428.44
12/12/13	10.91	428.83	12/12/13	9.31	429.02	12/12/13	10.46	428.98	12/12/13	12.51	429.08	12/12/13	12.56	429.23
09/23/13	12.19	427.55	09/23/13	10.63	427.70	09/23/13	11.79	427.65	09/23/13	15.75	425.84	09/23/13	13.91	427.88
06/10/13	10.45	429.29	06/10/13	8.75	429.58	06/10/13	9.98	429.46	06/10/13	12.08	429.51	06/10/13	13.16	428.63
03/27/13	11.83	427.91	03/27/13	10.82	427.51	03/27/13	11.48	427.96	03/27/13	13.51	428.08	03/27/13	13.69	428.10
12/03/12	12.31	427.43	12/03/12	10.82	427.51	12/03/12	11.98	427.46	12/03/12	13.84	427.75	12/03/12	14.06	427.73
06/18/12	12.01	427.73	06/18/12	10.46	427.87	06/18/12	11.66	427.78	06/18/12	13.70	427.89	06/18/12	13.89	427.90
03/19/12	11.49	428.25	03/19/12	9.91	428.42	03/19/12	11.11	428.33	03/19/12	13.16	428.43	03/19/12	13.33	428.46
12/05/11	12.01	427.73	12/05/11	10.48	427.85	12/05/11	11.62	427.82	12/05/11	13.61	427.98	12/05/11	13.81	427.98
09/26/11	11.95	427.79	09/26/11	10.41	427.92	09/26/11	11.61	427.83	09/26/11	13.66	427.93	09/26/11	13.82	427.97
06/13/11	11.74	428.00	06/13/11	10.15	428.18	06/13/11	11.32	428.12	06/13/11	13.39	428.20	06/13/11	13.59	428.20
03/29/11	11.02	428.72	03/29/11	9.48	428.85	03/29/11	10.65	428.79	03/29/11	12.81	428.78	03/29/11	12.97	428.82

Notes:
TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
El. = Elevation in Feet

Table 3
Historical Groundwater Data
Operable Unit 1 Wells

Well	LTMW-D01		LTMW-S01		LTMW-D02		LTMW-S02		LTMW-D03		LTMW-S03		LTMW-D04		LTMW-S04	
	TOC =	434.90	TOC =	435.52	TOC =	436.74	TOC =	436.79	TOC =	431.27	TOC =	431.43	TOC =	437.18	TOC =	437.24
Date	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.
12/03/21	8.18	426.72	8.28	427.24	10.17	426.57	9.91	426.88	4.69	426.58	3.62	427.81	9.57	427.61	9.27	427.97
09/22/21	8.63	426.27	8.82	426.70	10.83	425.91	10.62	426.17	5.28	425.99	4.57	426.86	10.54	426.64	10.13	427.11
06/09/21	8.58	426.32	8.68	426.84	10.67	426.07	9.59	427.20	7.33	423.94	4.27	427.16	9.94	427.24	9.64	427.60
03/18/21	8.55	426.35	8.58	426.94	10.57	426.17	10.31	426.48	5.03	426.24	4.13	427.30	9.81	427.37	9.54	427.70
12/03/20	8.80	426.10	8.60	426.92	10.60	426.14	10.38	426.41	5.15	426.12	4.15	427.28	9.75	427.43	9.44	427.80
09/11/20	8.85	426.05	8.85	426.67	10.77	425.97	10.45	426.34	6.46	424.81	4.30	427.13	10.25	426.93	9.68	427.56
06/11/20	10.06	424.84	8.88	426.64	11.69	425.05	10.46	426.33	5.23	426.04	4.28	427.15	10.05	427.13	9.70	427.54
03/20/20	8.10	426.80	8.30	427.22	8.90	427.84	8.20	428.59	3.50	427.77	1.80	429.63	8.25	428.93	7.10	430.14
12/05/19	9.20	425.70	8.47	427.05	10.50	426.24	10.17	426.62	4.93	426.34	3.95	427.48	9.65	427.53	9.39	427.85
09/19/19	9.54	425.36	8.70	426.82	10.60	426.14	10.45	426.34	5.20	426.07	4.20	427.23	9.90	427.28	9.55	427.69
06/06/19	7.80	427.10	8.00	427.52	9.70	427.04	9.33	427.46	4.25	427.02	2.90	428.53	6.23	430.95	8.12	429.12
03/21/19	8.00	426.90	8.20	427.32	10.15	426.59	9.77	427.02	4.45	426.82	3.63	427.80	9.35	427.83	8.90	428.34
12/05/18	7.54	427.36	7.54	427.98	9.29	427.45	8.95	427.84	5.75	425.52	2.40	429.03	8.64	428.54	7.78	429.46
09/13/18	8.81	426.09	8.67	426.85	10.60	426.14	10.36	426.43	5.48	425.79	4.18	427.25	10.02	427.16	9.35	427.89
06/07/18	8.55	426.35	8.70	426.82	10.35	426.39	10.32	426.47	4.32	426.95	4.11	427.32	9.78	427.40	9.48	427.76
03/22/18	8.22	426.68	9.41	426.11	10.21	426.53	9.98	426.81	5.65	425.62	3.60	427.83	9.35	427.83	9.05	428.19
12/06/17	8.17	426.73	8.16	427.36	10.07	426.67	9.61	427.18	4.76	426.51	3.30	428.13	9.35	427.83	8.35	428.89
09/01/17	8.75	426.15	8.74	426.78	10.64	426.10	10.31	426.48	5.23	426.04	4.15	427.28	9.99	427.19	9.50	427.74
06/23/17	8.30	426.60	8.53	426.99	10.45	426.29	10.27	426.52	4.91	426.36	4.05	427.38	9.58	427.60	9.45	427.79
03/08/17	8.13	426.77	8.27	427.25	10.11	426.63	9.79	427.00	4.48	426.79	3.53	427.90	9.00	428.18	8.79	428.45
12/15/16	8.11	426.79	8.02	427.50	10.03	426.71	9.73	427.06	4.55	426.72	3.28	428.15	9.32	427.86	8.41	428.83
09/19/16	8.78	426.12	8.73	426.79	10.70	426.04	10.41	426.38	5.26	426.01	4.25	427.18	10.03	427.15	9.61	427.63
06/07/16	8.56	426.34	7.85	427.67	10.16	426.58	10.21	426.58	4.75	426.52	4.07	427.36	9.47	427.71	9.38	427.86
03/07/16	7.75	427.15	7.18	428.34	9.05	427.69	9.15	427.64	3.69	427.58	2.45	428.98	8.55	428.63	7.85	429.39
12/03/15	7.71	427.19	8.29	427.23	9.85	426.89	9.74	427.05	4.38	426.89	3.51	427.92	9.63	427.55	8.65	428.59
09/16/15	8.30	426.60	8.76	426.76	10.29	426.45	10.32	426.47	4.91	426.36	4.15	427.28	9.69	427.49	9.52	427.72
06/03/15	8.07	426.83	8.03	427.49	10.02	426.72	10.13	426.66	4.45	426.82	3.92	427.51	9.35	427.83	9.27	427.97
04/08/15	7.34	427.56	7.99	427.53	9.58	427.16	9.71	427.08	4.01	427.26	3.54	427.89	8.85	428.33	8.75	428.49
12/01/14	7.94	426.96	8.15	427.37	9.75	426.99	9.64	427.15	4.11	427.16	3.13	428.30	9.09	428.09	8.57	428.67
09/10/14	8.14	426.76	8.12	427.40	9.99	426.75	9.64	427.15	4.58	426.69	3.19	428.24	9.30	427.88	8.70	428.54
06/12/14	8.68	426.22	8.24	427.28	10.57	426.17	10.26	426.53	4.71	426.56	4.11	427.32	9.60	427.58	9.42	427.82
03/25/14	8.22	426.68	8.50	427.02	10.11	426.63	10.19	426.60	4.71	426.56	4.09	427.34	9.56	427.62	9.43	427.81
12/12/13	7.61	427.29	7.64	427.88	9.19	427.55	8.75	428.04	3.97	427.30	1.99	429.44	8.57	428.61	7.45	429.79
09/23/13	8.36	426.54	8.75	426.77	10.28	426.46	10.28	426.51	5.11	426.16	4.05	427.38	9.84	427.34	9.52	427.72
06/10/13	7.17	427.73	7.52	428.00	9.09	427.65	8.73	428.06	3.52	427.75	2.18	429.25	7.99	429.19	6.99	430.25
03/27/13	8.27	426.63	8.64	426.88	10.28	426.46	9.98	426.81	4.84	426.43	3.87	427.56	9.61	427.57	9.36	427.88
12/03/12	8.65	426.25	8.60	426.92	10.42	426.32	9.90	426.89	5.08	426.19	3.80	427.63	9.85	427.33	9.91	427.33
09/12/12	8.84	426.06	8.91	426.61	10.76	425.98	10.35	426.44	5.39	425.88	4.17	427.26	10.20	426.98	9.62	427.62
06/18/12	8.35	426.55	8.61	426.91	10.35	426.39	10.26	426.53	5.10	426.17	4.08	427.35	8.76	428.42	9.48	427.76
03/19/12	8.01	426.89	8.11	427.41	9.92	426.82	9.46	427.33	4.50	426.77	3.04	428.39	9.24	427.94	8.29	428.95
12/05/11	8.16	426.74	8.31	427.21	10.12	426.62	9.61	427.18	4.63	426.64	3.35	428.08	9.39	427.79	8.81	428.43
09/26/11	8.38	426.52	8.45	427.07	10.45	426.29	10.18	426.61	4.71	426.56	3.93	427.50	9.45	427.73	9.44	427.80
06/13/11	7.61	427.29	8.36	427.16	10.27	426.47	9.95	426.84	4.78	426.49	3.75	427.68	9.42	427.76	9.17	428.07
03/28/11	7.83	427.07	7.85	427.67	9.68	427.06	9.43	427.36	4.41	426.86	3.34	428.09	9.07	428.11	8.91	428.33

Notes:
TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
El. = Elevation in Feet

Table 3
Historical Groundwater Data
Operable Unit 1 Wells

Well	LTMW-D05		LTMW-S05		LTMW-D06		LTMW-S06		LTMW-S07		LTMW-S08		LTMW-S09		LTMW-S10	
	TOC =	437.78	TOC =	437.92	TOC =	441.70	TOC =	441.64	TOC =	439.70	TOC =	443.81	TOC =	439.79	TOC =	439.67
Date	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.	DTW	Water El.
12/03/21	9.10	428.68	9.78	428.14	12.08	429.62	12.81	428.83	10.31	429.39	15.14	428.67	9.32	430.47	9.89	429.78
09/22/21	9.75	428.03	10.71	427.21	12.55	429.15	13.44	428.20	11.13	428.57	15.78	428.03	9.29	430.50	10.37	429.30
06/09/21	9.58	428.20	9.90	428.02	12.44	429.26	13.22	428.42	10.88	428.82	15.59	428.22	9.55	430.24	9.75	429.92
03/18/21	9.07	428.71	9.85	428.07	12.25	429.45	13.00	428.64	11.04	428.66	15.27	428.54	9.37	430.42	9.95	429.72
12/03/20	9.60	428.18	10.79	427.13	12.45	429.25	13.20	428.44	10.97	428.73	15.58	428.23	9.82	429.97	10.30	429.37
09/11/20	10.82	426.96	9.95	427.97	12.90	428.80	13.65	427.99	11.70	428.00	16.60	427.21	10.55	429.24	11.07	428.60
06/11/20	9.67	428.11	9.93	427.99	12.61	429.09	13.51	428.13	11.43	428.27	15.95	427.86	10.12	429.67	10.86	428.81
03/20/20	7.50	430.28	7.80	430.12	11.00	430.70	11.70	429.94	9.75	429.95	14.15	429.66	9.00	430.79	9.60	430.07
12/05/19	9.30	428.48	9.73	428.19	12.29	429.41	13.12	428.52	10.80	428.90	15.45	428.36	9.73	430.06	10.29	429.38
09/19/19	9.44	428.34	9.86	428.06	11.45	430.25	13.40	428.24	11.20	428.50	15.80	428.01	10.03	429.76	10.70	428.97
06/06/19	8.35	429.43	8.65	429.27	11.60	430.10	12.55	429.09	10.15	429.55	14.94	428.87	9.26	430.53	9.74	429.93
03/21/19	8.92	428.86	9.38	428.54	11.80	429.90	12.50	429.14	10.08	429.62	14.08	429.73	9.15	430.64	9.52	430.15
12/05/18	8.18	429.60	7.30	430.62	11.10	430.60	11.55	430.09	8.55	431.15	13.90	429.91	8.70	431.09	9.20	430.47
09/13/18	9.67	428.11	9.68	428.24	12.70	429.00	13.35	428.29	11.55	428.15	15.80	428.01	10.23	429.56	10.75	428.92
06/07/18	9.47	428.31	9.64	428.28	12.42	429.28	13.26	428.38	11.06	428.64	15.70	428.11	10.10	429.69	10.64	429.03
03/22/18	8.95	428.83	8.80	429.12	12.10	429.60	12.92	428.72	10.40	429.30	15.30	428.51	9.50	430.29	10.15	429.52
12/06/17	9.02	428.76	9.16	428.76	12.00	429.70	12.25	429.39	10.67	429.03	15.10	428.71	9.58	430.21	10.10	429.57
09/01/17	9.51	428.27	9.60	428.32	12.62	429.08	13.50	428.14	12.60	427.10	15.78	428.03	10.38	429.41	10.96	428.71
06/23/17	9.14	428.64	9.60	428.32	12.07	429.63	12.88	428.76	10.73	428.97	15.22	428.59	12.88	426.91	10.18	429.49
03/08/17	8.26	429.52	7.54	430.38	11.52	430.18	11.78	429.86	10.39	429.31	14.69	429.12	9.21	430.58	9.98	429.69
12/15/16	8.80	428.98	9.00	428.92	12.28	429.42	11.70	429.94	9.89	429.81	14.50	429.31	8.60	431.19	9.30	430.37
09/19/16	9.63	428.15	9.65	428.27	12.61	429.09	13.24	428.40	11.44	428.26	15.59	428.22	9.82	429.97	10.68	428.99
06/07/16	8.82	428.96	9.53	428.39	11.98	429.72	13.03	428.61	11.01	428.69	15.36	428.45	9.81	429.98	10.41	429.26
03/07/16	7.85	429.93	8.27	429.65	11.16	430.54	12.13	429.51	9.94	429.76	14.48	429.33	9.05	430.74	9.65	430.02
12/02/15	8.77	429.01	9.21	428.71	12.31	429.39	13.20	428.44	11.55	428.15	15.67	428.14	10.40	429.39	10.95	428.72
09/16/15	8.97	428.81	9.51	428.41	12.58	429.12	13.25	428.39	11.54	428.16	15.65	428.16	9.89	429.90	10.65	429.02
06/03/15	9.25	428.53	9.41	428.51	12.15	429.55	12.93	428.71	10.81	428.89	15.21	428.60	9.15	430.64	9.93	429.74
04/08/15	8.74	429.04	9.36	428.56	11.67	430.03	12.55	429.09	10.06	429.64	14.85	428.96	8.89	430.90	9.54	430.13
12/01/14	8.28	429.50	8.91	429.01	11.77	429.93	12.49	429.15	10.97	428.73	14.78	429.03	9.31	430.48	9.93	429.74
09/10/14	8.85	428.93	8.97	428.95	11.91	429.79	12.68	428.96	10.96	428.74	15.34	428.47	9.35	430.44	10.29	429.38
06/12/14	9.02	428.76	9.52	428.40	12.28	429.42	13.08	428.56	11.14	428.56	15.34	428.47	9.63	430.16	10.46	429.21
03/25/14	9.03	428.75	8.50	429.42	11.95	429.75	12.81	428.83	10.85	428.85	15.03	428.78	9.11	430.68	9.93	429.74
12/12/13	7.96	429.82	7.85	430.07	11.20	430.50	11.87	429.77	10.16	429.54	14.11	429.70	8.95	430.84	9.63	430.04
09/23/13	8.94	428.84	9.52	428.40	12.36	429.34	13.21	428.43	11.39	428.31	15.46	428.35	9.86	429.93	10.64	429.03
06/10/13	7.55	430.23	7.48	430.44	11.15	430.55	11.78	429.86	10.27	429.43	14.12	429.69	9.43	430.36	10.17	429.50
03/27/13	9.13	428.65	9.45	428.47	12.16	429.54	13.10	428.54	10.92	428.78	15.27	428.54	9.55	430.24	10.31	429.36
12/03/12	9.51	428.27	9.48	428.44	13.43	428.27	12.78	428.86	11.59	428.11	15.72	428.09	10.25	429.54	10.91	428.76
09/12/12	9.76	428.02	9.64	428.28	12.81	428.89	13.69	427.95	11.97	427.73	15.95	427.86	10.58	429.21	11.27	428.40
06/18/12	9.26	428.52	9.51	428.41	12.41	429.29	13.23	428.41	11.31	428.39	15.40	428.41	9.81	429.98	10.56	429.11
03/19/12	8.79	428.99	9.04	428.88	12.12	429.58	12.99	428.65	11.05	428.65	15.19	428.62	9.73	430.06	10.43	429.24
12/05/11	9.02	428.76	9.08	428.84	12.22	429.48	13.04	428.60	10.97	428.73	15.19	428.62	9.58	430.21	10.34	429.33
09/26/11	9.32	428.46	9.53	428.39	12.40	429.30	13.20	428.44	11.01	428.69	15.21	428.60	9.55	430.24	10.31	429.36
06/13/11	8.91	428.87	9.34	428.58	11.99	429.71	12.88	428.76	10.79	428.91	15.03	428.78	9.49	430.30	10.29	429.38
03/28/11	8.08	429.70	9.12	428.80	11.62	430.08	12.41	429.23	10.08	429.62	14.46	429.35	10.14	429.65	9.75	429.92

Notes:
TOC = Top of Inner Well Casing Elevation in Feet
DTW = Depth to Water from Top of Casing in Feet
El. = Elevation in Feet

Table 4
Groundwater Analytical Data
LTMW-D01

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20	09/10/20	12/03/20	03/18/21	06/10/21	09/23/21	12/02/21
Benzene	5	1	1	8,990	5,800	5,290	2,470	4,250	5,460	3,440	3,900	1,410	7,360	6,290	2,370	3,400	4,310	2,060	1,600	3,400	4,780	2,720	4,670	3,360
Toluene	1,000	5	1	2,080	1,320	1,470	809	1,230	1,140	992	1,080	1,740	2,200	1,410	630	876	183	392	202	247	727	172	532	291
Ethylbenzene	700	5	1	241	145	137	179	177	95.0	119	163	203	202	170	142	222	1,120	96.3	101	179	195	106	247	238
Xylene (total)	10,000	5	2	254	206	201	157	187	135	155	164	214.5	339	229	134.8	180.8	277	134	109	152	209	135	205	175.8
Acenaphthene	N/A	20	4.9	0.43	0.19	0.10	0.19	0.35	0.18	0.19	0.14	0.40	0.48	0.23	0.21	0.33	0.47	0.16	0.22	0.36	0.44	0.30	0.51	0.57
Acenaphthylene	N/A	NA	4.9	6.2	0.31	0.11	0.36	7.1	3.1	1.1	1.9	7.1	8.6	2.3	0.51	2.8	5.9	0.17	1.5	4.4	3.9	1.4	2.4	1.7
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	14	11	ND	ND	ND	10	ND	ND	15	ND	ND	ND	ND	14	ND	ND	12	5.65	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	0.35	0.15	ND	ND	0.41	0.17	0.14	0.10	0.30	0.55	0.16	ND	0.20	0.47	0.11	0.12	0.24	0.28	0.17	0.23	0.22
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	229	ND	ND	ND	7.2	94.6	0.44	0.83	170	381	8.3	ND	4.3	121	ND	0.17	20.6	14.9	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	107	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	6.9	ND	6.8	9.1	ND	ND	ND	9.1	6.2	6.6	9.7	8.1	8.6	6.6	10.6	10.5	11.1
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limits
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S01

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20	09/10/20	12/03/20	03/18/21	06/10/21	09/23/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	1.9	ND	1.9	ND	ND	1.2	ND	ND	2.3	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	1.2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	91.2	69.4	56.4	105	75.1	56.5	68.1	101	64.4	53.1	70.6	69.0	74.5	63.7	46.9	88.3	108.0	95.3	102	98	94.3
Acenaphthylene	N/A	NA	4.9	3	3.2	2.5	3.6	2.7	2.2	3.3	4.4	2.6	2	2.7	3.2	3.3	2.3	1.7	3.3	4.3	3.5	4.0	4.0	3.4
Anthracene	N/A	NA	4.9	0.38	0.52	0.28	0.40	0.34	0.27	0.37	0.47	0.35	0.25	0.47	0.41	0.44	0.24	0.17	0.4	0.4	0.34	0.35	0.41	0.31
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	13	55	18	12	15	11	17	19	14	14	16	18	18	25	25	26	19	11.6	14	24	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	4	3.6	2.8	4.8	3.5	2.4	3.7	6.1	3.6	2.6	3.8	5.4	5.0	2.8	2.7	5.4	5.7	3.9	5.0	6.0	4.7
Fluorene	N/A	0.002	4.9	27.6	19.9	12.6	28.5	19.2	15.4	18.1	28.3	15.6	13.6	18	22.9	19.6	14.3	12.7	26.1	29.7	26.6	28.6	30.4	23.3
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	0.38	0.4	0.15	0.24	0.31	ND	0.23	ND	0.31	0.15	0.26	0.23	0.27	0.25	ND	0.16	0.3	0.29	0.28	0.2	0.19
Phenanthrene	N/A	50	4.9	0.74	1.7	ND	0.14	0.20	0.26	0.13	0.20	0.16	0.11	0.41	0.13	0.17	0.13	ND	0.16	0.17	0.17	0.14	0.13	0.13
Pyrene	N/A	50	4.9	4.2	3.6	2.7	4.9	3.7	2.5	3.8	6.6	4.4	2.7	3.9	5.7	5.3	3.0	2.9	5.7	6.1	4.3	5.2	6.2	5.2
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	11.5	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-D02

Parameter	EPA - Maximum Allowable (u/L)	NYSDEC AWQS (u/L)	Reporting Level (u/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20	09/10/20	12/03/20	03/18/21	06/09/21	09/22/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	2.2	1.6	ND	2.0	0.97	1.2	1.0	0.91	0.23	0.36	0.25	0.15	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	0.43	0.39	ND	0.48	0.22	0.29	0.31	0.24	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	150	200	ND	160	160	160	150	140	10	140	140	110	ND	130	11	ND	140	82.7	12	26	78
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
u/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S02

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20	09/10/20	12/03/20	03/18/21	06/09/21	09/22/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	0.13	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	130	75	73	110	90	60	59	110	10	57	71	70	73	76	64	94	96	46.4	82	68	57
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	7.7	ND	ND	7.6	ND	7.1	7.2	ND	ND	ND	5.1	6.3	ND	9.1	7.2	7.5	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-D03

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20	09/10/20	12/03/20	03/18/21	06/10/21	09/23/21	12/02/21
Benzene	5	1	1	27.1	10.2	8.5	8.9	9.5	4.7	6.4	5.4	8.4	6.2	9.6	6.2	2.5	3.3	4.6	2.5	5.0	3.0	4.4	4.7	3.5
Toluene	1,000	5	1	55	5.9	1.9	1.9	5.4	ND	1.2	2.0	3.9	18.2	5.6	2.0	ND	11.0	2.6	ND	ND	ND	3.1	1.2	ND
Ethylbenzene	700	5	1	23.9	63.7	44	49.0	40.2	26.0	34.1	23.6	22.2	3	20.7	16.5	11.3	ND	11.8	10.4	10.4	8.2	6.0	6.6	6.8
Xylene (total)	10,000	5	2	25.7	13.5	5.6	7.5	8.4	4.0	4.4	5.5	6.2	7.1	8.4	1.4	ND	ND	3.4	ND	ND	ND	3.5	ND	ND
Acenaphthene	N/A	20	4.9	ND	10.7	3.70	10.2	5.9	5.8	8.3	5.7	6.2	8.0	6.0	7.90	4.3	4.3	6.8	5.4	8.8	2.4	6.5	5.4	6.8
Acenaphthylene	N/A	NA	4.9	10.6	3.1	2.5	2.2	1.5	1.3	2.0	1.6	2.8	2.2	2.1	1.4	0.89	0.54	1.8	1.9	1.5	0.29	0.33	0.49	0.56
Anthracene	N/A	NA	4.9	ND	5.6	0.3	3.7	2.4	2.2	2.8	2.1	2	2.1	1.6	1.6	0.9	0.45	0.73	2.80	0.68	0.32	0.50	ND	0.26
Benzo(a)anthracene	N/A	0.002	4.9	ND	0.42	ND	0.40	0.26	0.30	0.34	0.29	0.28	0.4	0.38	0.41	0.26	0.23	0.31	3.6	0.45	0.29	0.30	0.29	0.27
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.4	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	1.7	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.8	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.68	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	0.25	ND	0.24	0.18	0.17	0.19	0.18	0.16	0.21	0.23	0.25	0.17	0.15	0.18	2.10	0.24	0.19	0.18	0.17	0.17
Cyanide	N/A	200	10	79	84	76	66	78	64	66	62	62	65	72	60	53	67	62	63	58	55.7	50	49	43
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.2	5.4	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	6.1	2.9	5.9	3.7	4.1	4.7	4.0	3.5	5.1	4.2	5.4	3.2	3.4	4.2	12.3	5.6	3.9	4.2	3.7	4.0
Fluorene	N/A	0.002	4.9	ND	7.1	13.2	6.2	3.7	3.6	5.1	3.5	3.8	5.1	3.6	4.9	2.8	2.3	4.1	5.2	5.6	3.0	4.1	3.4	3.7
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	9.4	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.68	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	284	32.2	0.15	10.0	16.5	3.9	3.7	6.9	12.7	9.8	10.6	3.5	0.5	0.3	13.2	2.5	8.1	ND	0.11	0.70	2.90
Phenanthrene	N/A	50	4.9	1.5	30.3	0.11	24.1	15.2	16.3	18.1	18.1	17.9	19.9	15.2	19.6	8.5	2.9	15.9	22.2	20.1	8.7	15.3	12.8	14.5
Pyrene	N/A	50	4.9	1.2	7.6	2.8	7.6	4.8	5.5	6.0	5.3	5.1	6.6	5.3	6.9	4	4.6	5.5	17.4	7.0	3.4	5.3	4.7	5.2
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	17	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S03

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20	09/10/20	12/03/20	03/18/21	06/10/21	09/23/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.13	ND	0.14	0.26
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	10	ND	ND	ND	ND	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	0.15	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.099
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	0.17	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.11	ND	0.23	0.39
Phenanthrene	N/A	50	4.9	ND	0.11	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.12	ND	0.11	0.21
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	7.3	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	4,600	5,330	4,250	3,740	3,620	4,070	3,660	3,060	5,620	4,040	3,740	3,710	4,160	3,840	3,550	3,160	3,640	4,180	3,580	3,470	4,390

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-D04

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/06/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20	09/10/20	12/03/20	03/18/21	06/10/21	09/23/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	11	ND	ND	ND	ND	ND	19	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	35.3	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	22.5	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	32	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S04

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/06/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20	09/10/20	12/03/20	03/18/21	06/10/21	09/23/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	2,000	900	1,200	200	1,300	400	230	220	1,300	860	660	190	120	1,700	440	470	1,700	801	570	620	2,500
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	618	358	108	128	472	472	267	179	230	242	184	156	156	44.4	122	113	384	222	217	45.8	160

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-D05

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20	09/10/20	12/03/20	03/18/21	06/09/21	09/22/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S05

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20	09/10/20	12/03/20	03/18/21	06/09/21	09/22/21	12/02/21
Benzene	5	1	1	ND	5,800	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	1,320	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	145	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	206	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	0.19	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	0.31	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	830	510	570	270	380	430	120	89	260	120	230	65	170	150	110	110	76	44.8	94	110	120
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	0.15	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	5.4	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	27.5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	18.6	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-D06

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/06/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20	09/10/20	12/03/20	03/18/21	06/09/21	09/22/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	92	ND	ND	ND	ND	ND	ND	ND	ND	ND	11	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	8.1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	8.1	8.5	8.0	6.0	12.0	10.4	7.3	5.7	ND	9.2	8.8	9.6	7.1	7.5	8.8	8.1	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S06

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/06/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20	09/10/20	12/03/20	03/18/21	06/09/21	09/22/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	190	79	14	18	64	55	19	110	66	11	54	84	53	82	40	72	77.7	73	120	130
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S07

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20	09/10/20	12/03/20	03/18/21	06/09/21	09/23/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	1.1	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	0.16	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	8.8	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	24	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	96.8	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S08

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20	09/10/20	12/03/20	03/18/21	06/09/21	09/22/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.19	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.21	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.31	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.15	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.26	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.14	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	140	240	16	140	16	200	150	80	250	30	10	62	180	380	110	110	180	ND	160	110	250
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.51	ND	ND	ND	0.13	0.12	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.12	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	0.12	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.26	ND	ND	ND	ND	0.15	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.46	ND	ND	ND	0.11	0.14	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	12.5	ND	ND	ND	ND	ND	ND	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S09

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20	09/10/20	12/03/20	03/18/21	06/09/21	09/22/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthylene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Anthracene	N/A	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Phenanthrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	0.11	ND	ND	ND	ND	ND	ND	ND	ND
Pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	23.2	97.6	24.4	ND	15.3	ND	ND	10.7	27.6	ND	14.3	10.1	ND	12.7	ND	ND	10.3	17.5	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS

Table 4
Groundwater Analytical Data
LTMW-S10

Parameter	EPA - Maximum Allowable (µg/L)	NYSDEC AWQS (µg/L)	Reporting Level (µg/L)	12/07/16	03/08/17	06/07/17	09/21/17	12/06/17	03/21/18	06/07/18	09/13/18	12/05/18	03/21/19	06/06/19	09/19/19	12/05/19	03/18/20	06/11/20	09/10/20	12/03/20	03/18/21	06/09/21	09/22/21	12/02/21
Benzene	5	1	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	1,000	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	700	5	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (total)	10,000	5	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acenaphthene	N/A	20	4.9	17.4	3.1	4.30	11.0	6.8	2.3	9.7	11.8	5.7	10.8	5.1	13.60	7.70	8.80	19.30	18.10	ND	0.12	12.5	10.0	ND
Acenaphthylene	N/A	NA	4.9	0.96	0.2	0.23	0.73	0.54	0.20	0.51	0.61	0.39	0.74	0.42	0.67	0.63	0.38	0.63	0.64	ND	ND	0.28	0.35	ND
Anthracene	N/A	NA	4.9	0.12	0.12	ND	0.11	ND	ND	ND	0.14	ND	0.13	0.11	0.15	0.13	ND	0.11	0.16	ND	ND	ND	ND	ND
Benzo(a)anthracene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(a)pyrene	N/A	ND	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(b)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(g,h,i)perylene	0.2	NA	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Benzo(k)fluoranthene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chrysene	N/A	0.002	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyanide	N/A	200	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	13	ND	ND	ND	ND	ND	ND	ND
Dibenzo(a,h)anthracene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Fluoranthene	N/A	50	4.9	1.5	0.5	0.62	2.0	1.4	0.71	1.3	1.8	1.1	1.6	1.3	2.1	1.9	1.1	1.4	1.4	ND	ND	ND	ND	ND
Fluorene	N/A	0.002	4.9	1.1	0.17	0.35	1.1	0.73	0.25	0.71	1.0	0.7	1.2	0.6	1.3	1.0	0.8	1.6	1.5	ND	ND	0.75	0.63	ND
Indeno(1,2,3-cd)pyrene	N/A	50	4.9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Naphthalene	N/A	10	4.9	ND	0.2	0.17	ND	ND	0.20	9.1	ND	ND	1.5	0.37	0.13	ND	ND	1.9	ND	ND	ND	0.29	0.37	ND
Phenanthrene	N/A	50	4.9	0.94	ND	0.22	0.73	0.43	0.12	0.32	0.76	0.32	0.62	0.26	0.86	0.53	0.39	0.76	0.58	ND	ND	0.15	ND	ND
Pyrene	N/A	50	4.9	1.9	0.45	0.71	2.4	1.7	0.90	1.7	2.3	1.5	2	1.6	2.70	2.40	1.4	1.9	1.8	ND	ND	ND	ND	ND
Arsenic	N/A	25	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Lead	N/A	25	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Zinc	N/A	2,000	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	17.9	ND	ND	ND

EPA = Environmental Protection Agency
NYSDEC = New York State Department of Environmental Conservation
AWQS = Ambient Water Quality Standards
µg/L = Micrograms per Liter
ND = Not detected above laboratory reporting limit
H = Quantitated using peak height rather than peak area
J = Estimated Concentration Value
Bolded = values indicate exceedance of the NYSDEC AWQS



Table 5
Discharge Analytical Data
Groundwater Extraction System Effluent Concentrations

Parameter	City of Rome WPCF Permit Max Daily Limit (mg/L)	09/21/17	12/06/17	03/27/18	06/07/18	09/13/18	12/06/18	03/21/19	06/06/19	09/19/19	12/05/19	03/19/20	06/11/20	09/10/20	12/04/20	03/18/21	06/09/21	09/23/21	12/02/21
Benzene	0.13	0.0360	0.0200	0.0274	0.0315	0.0239	0.0297	0.0618	0.0359	0.0423	0.0527	0.0315	0.034	0.0254	0.0499	0.0881	0.0761	0.0608	0.0709
Ethylbenzene	1.59	0.0052	0.0019	0.0024	0.0040	0.0024	0.0024	0.0046	0.0047	0.0050	0.0065	0.0042	0.0052	0.0041	0.0056	0.0070	0.0081	0.0064	0.0067
Toluene	1.35	ND (<0.001)	0.0017	0.0025	0.0025	0.0037	0.0026	0.0113	0.0058	0.0082	0.0079	0.0056	0.0036	0.002	0.0048	0.0217	0.0112	0.0084	0.0077
Xylene	1.35	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	0.0042	0.0011	0.0011	0.0039	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	0.0058	0.0053	0.0036	0.0038
Total BTEX	2.87	0.0412	0.0236	0.0323	0.0380	0.0300	0.0347	0.0777	0.0475	0.0566	0.0710	0.0412	0.0428	0.0315	0.0602	0.1230	0.1007	0.0792	0.0891
Arsenic	0.1	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	0.012	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.010)	ND (<0.010)	ND (<0.010)
Cadmium	0.11	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	0.0054	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.0030)	ND (<0.002)	ND (<0.0025)	ND (<0.0025)
Chromium	2.77	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.010)	ND (<0.010)	ND (<0.010)
Copper	1.3	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	0.08	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	0.016	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.010)	ND (<0.025)	ND (<0.025)
Cyanide	1.2	0.056	0.074	0.069	0.070	0.059	0.086	0.067	0.097	0.083	0.098	0.11	0.079	0.076	0.078	0.0637	0.050	0.060	ND (<0.010)
Lead	1.1	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	0.0071	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.0050)	ND (<0.005)	ND (<0.005)	ND (<0.005)
Mercury	0.2	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)	ND (<0.00020)
Nickel	1.9	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.040)	ND (<0.040)
Silver	0.43	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.0060)	ND (<0.005)	ND (<0.010)	ND (<0.010)
Zinc	2.6	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.010)	0.13	ND (<0.010)	ND (<0.010)	ND (<0.010)	0.015	ND (<0.010)	ND (<0.010)	ND (<0.010)	ND (<0.50)	ND (<0.020)	ND (<0.020)
pH	5.5 - 11.5 SU	6.8	6.8	6.8	6.7	6.9	7.1	6.9	6.9	6.9	7	6.9	6.7	6.9	6.8	7.7	6.9	6.9	7.1

Results in mg/L.
mg/L = Milligrams per Liter
WPCF = Water Pollution Control Facility
NS = Not Sampled
NA = Not Analyzed
SU = Standard Units



Appendix A – Field Inspection Report

Field Inspection Report**Former MGP Site****Kingsley Avenue****Rome, New York**Date: 12/3/2021Technician: KLTime: 7:30Weather: Cloudy 35**Site Controls**

Fence Condition	GOOD	FAIR	DAMAGED	COMMENTS:
Kingsley Ave Gate	GOOD	FAIR	DAMAGED	COMMENTS:
Padlock-NG/GES	OPERATIONAL	NON-OPERATIONAL		COMMENTS:
Railroad Ave Gate	GOOD	FAIR	DAMAGED	COMMENTS:
Padlock-NG/GES	OPERATIONAL	NON-OPERATIONAL		COMMENTS:

Vegetation (Surface Cover System)

Condition of Grass	GOOD	FAIR	POOR	COMMENTS:
Site Trees	NONE	MINOR	SIGNIFICANT	COMMENTS:
Surface Erosion	NONE	MINOR	SIGNIFICANT	COMMENTS:

Stoned Areas

Condition of Main Access Road	GOOD	FAIR	POOR	COMMENTS:
Condition of Main Staging Area	GOOD	FAIR	POOR	COMMENTS:
Condition of Rear Turn Around Area	GOOD	FAIR	POOR	COMMENTS:

Drainage Systems

Rip Rap Area	Culvert	UNOBSTRUCTED	OBSTRUCTED	
	Flow	NONE	LITTLE	SIGNIFICANT
	Outlet Channel	OPERATIONAL	NON-OPERATIONAL	COMMENTS:

Miscellaneous

Evidence of Trespassing	NO	YES	COMMENTS:
Litter	NONE	MINOR	SIGNIFICANT

General Comments:



Appendix B – Quarterly Gauging and Containment Data

Quarterly Well Data
Kingsley Avenue, Former MGP Site
Utica, New York

WELL ID.	DTW	DTP	DTB	Comments
MW-OU2-1	8.95	43.20	45.81	Removed 2 gallons of DNAPL
MW-OU2-2	9.93	NP	47.53	trace on probe
MW-OU2-3	6.50	NP	34.18	
MW-OU2-4	6.45	35.05	39.55	Removed 3.0 gallons of DNAPL
MW-OU2-5	7.05	NP	36.01	
DNAPL-02	9.08	NP	50.40	
DNAPL-03	9.38	NP	52.32	trace on probe
DNAPL-04	10.56	NP	51.45	
DNAPL-05	12.73	NP	54.75	
DNAPL-06	11.86	NP	51.45	
DNAPL-07	12.21	NP	53.60	
DNAPL-08	12.89	NP	58.01	
DNAPL-09	13.80	NP	57.58	
VTM-1	11.62	NP	46.37	
VTM-2	10.01	NP	49.47	
VTM-3	11.16	NP	50.91	
VTM-4	13.03	NP	50.62	
VTM-5	13.15	NP	52.52	
LTMW-D01	8.18	NP	46.84	
LTMW-S01	8.28	NP	16.92	
LTMW-D02	10.17	NP	40.29	
LTMW-S02	9.91	NP	17.98	
LTMW-D03	4.69	NP	40.73	
LTMW-S03	3.62	NP	13.70	
LTMW-D04	9.57	NP	46.36	
LTMW-S04	9.27	NP	17.26	
LTMW-D05	9.10	NP	46.53	
LTMW-S05	9.78	NP	16.83	
LTMW-D06	12.08	NP	52.22	
LTMW-S06	12.81	NP	17.60	
LTMW-S07	10.31	NP	17.82	
LTMW-S08	15.14	NP	17.39	
LTMW-S09	9.32	NP	16.92	
LTMW-S10	9.89	NP	17.18	

Containment

Well Id.	Elevation	DTW	Water Elevation	Positive Delta
DNAPL-02	436.81	9.08	427.73	6.11
Top Steel Sheet Wall	433.84			
DNAPL-03	437.23	9.38	427.85	3.36
Top Steel Sheet Wall	431.21			
DNAPL-04	438.50	10.56	427.94	4.88
Top Steel Sheet Wall	432.82			
DNAPL-05	440.60	12.73	427.87	2.33
Top Steel Sheet Wall	430.20			
DNAPL-06	439.71	11.86	427.85	5.70
Top Steel Sheet Wall	433.55			
VTM-1	439.74	11.62	428.12	3.70
Top Steel Sheet Wall	431.82			
VTM-2	438.33	10.01	428.32	4.38
Top Steel Sheet Wall	432.70			
VTM-3	439.44	11.16	428.28	8.64
Top Steel Sheet Wall	436.92			
VTM-4	441.59	13.03	428.56	4.98
Top Steel Sheet Wall	433.54			
VTM-5	441.79	13.15	428.64	7.36
Top Steel Sheet Wall	436.00			



Appendix C – Well Sampling Field Data

Well ID	Sample ?	Well Size	DTW	DTP	DTB	Comments
MW-OU2-1	No	4"	8.95	43.20	45.81	2 gallons DNAPL Removed
MW-OU2-2	No	4"	9.83	Free	47.53	
MW-OU2-3	No	4"	6.50	-	34.18	
MW-OU2-4	No	4"	6.45	33.23	39.55	
MW-OU2-5	No	4"	7.05	-	36.01	
DNAPL-02	No	6"	9.08	-	50.40	
DNAPL-03	No	6"	9.38	Free	52.32	
DNAPL-04	No	6"	10.56	-	51.45	
DNAPL-05	No	6"	12.73	-	54.75	
DNAPL-06	No	6"	11.86	-	51.45	
DNAPL-07	No	6"	12.21	-	53.60	
DNAPL-08	No	6"	12.89	-	58.01	
DNAPL-09	No	6"	13.80	-	57.58	
VTM-1	No	6"	11.62	-	46.37	
VTM-2	No	6"	10.01	-	49.47	
VTM-3	No	6"	11.16	-	50.91	
VTM-4	No	6"	13.03	-	50.62	
VTM-5	No	6"	13.15	-	52.52	
LTMW-D01	Yes	2"	8.18		46.84	
LTMW-S01	Yes	2"	8.28		16.92	
LTMW-D02	Yes	2"	10.17		40.29	
LTMW-S02	Yes	2"	9.91		17.98	
LTMW-D03	Yes	2"	4.69		40.73	
LTMW-S03	Yes	2"	9.57	3.62	13.70	
LTMW-D04	Yes	2"	9.57		46.36	
LTMW-S04	Yes	2"	9.27		17.26	
LTMW-D05	Yes	2"	9.10		46.53	
LTMW-S05	Yes	2"	9.78		16.83	
LTMW-D06	Yes	2"	12.08		52.22	
LTMW-S06	Yes	2"	12.81		17.60	
LTMW-S07	Yes	2"	10.31		17.82	
LTMW-S08	Yes	2"	15.14		17.39	
LTMW-S09	Yes	2"	9.32		16.92	Dup
LTMW-S10	Yes	2"	9.89		17.18	MS/MSD

DTW -depth to water
DTP -depth to product
DTB -depth to bottom
All from top of casing

Sampling Personnel: HL
Job Number: 0603275-134400-221
Well Id. LTMW-D01

Date: 12/2/21
Weather: Cloudy 39
Time In: 09:00 Time Out: _____

Well Information		TOC	Other
Depth to Water:	(feet)	<u>8.18</u>	
Depth to Bottom:	(feet)	<u>46.84</u>	
Depth to Product:	(feet)	<u>—</u>	
Length of Water Column:	(feet)	<u>38.66</u>	
Volume of Water in Well:	(gal)	<u>6.18</u>	
Three Well Volumes:	(gal)	<u>18.55</u>	

Well Type: Flushmount ☐ Stick-Up ☒
Well Locked: Yes ☒ No ☐
Measuring Point Marked: Yes ☒ No ☐
Well Material: PVC ☒ SS ☐ Other: _____
Well Diameter: 1" ☐ 2" ☒ Other: _____
Comments: _____

Purging Information

Purging Method: _____
Tubing/Bailer Material: _____
Sampling Method: _____
Average Pumping Rate: (ml/min) 200
Duration of Pumping: (min) 30
Total Volume Removed: (gal) 2 Did well go dry? Yes ☐ No ☒
Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=133.7cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
<u>9:10</u>	<u>9.12</u>	<u>12.10</u>	<u>8.81</u>	<u>-84</u>	<u>0.405</u>	<u>0.0</u>	<u>1.11</u>	<u>0.265</u>
<u>09:15</u>	<u>10.18</u>	<u>12.63</u>	<u>8.95</u>	<u>-162</u>	<u>0.379</u>	<u>0.0</u>	<u>0.16</u>	<u>0.246</u>
<u>09:20</u>	<u>11.35</u>	<u>12.70</u>	<u>9.01</u>	<u>-177</u>	<u>0.371</u>	<u>0.0</u>	<u>0.00</u>	<u>0.241</u>
<u>09:25</u>	<u>12.22</u>	<u>12.79</u>	<u>9.01</u>	<u>-184</u>	<u>0.366</u>	<u>0.0</u>	<u>0.00</u>	<u>0.238</u>
<u>09:30</u>	<u>14.24</u>	<u>12.78</u>	<u>8.99</u>	<u>-189</u>	<u>0.366</u>	<u>0.0</u>	<u>0.00</u>	<u>0.238</u>
<u>09:35</u>	<u>15.13</u>	<u>12.80</u>	<u>9.00</u>	<u>-191</u>	<u>0.366</u>	<u>0.0</u>	<u>0.00</u>	<u>0.238</u>
<u>09:40</u>	<u>16.12</u>	<u>12.81</u>	<u>8.98</u>	<u>-193</u>	<u>0.366</u>	<u>0.0</u>	<u>0.00</u>	<u>0.238</u>

Sampling Information:

EPA SW-846 Method 8270 SVOC PAH's
EPA SW-846 Method 8260 VOC's BTEX
EPA Method 335.4 Cyanide
EPA Method 200.7 Metals

2 - 100ml ambers Yes ☒ No ☐
3 - 40 ml vials Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐

Sample ID: LTMW-D01-1221 Duplicate? Yes ☐ No ☒
Sample Time: 09:40 MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
Drop-off Albany Service Center ☐

Laboratory: Pace Analytical
Greensburg, PA

Comments/Notes: _____

Sampling Personnel: ✓
Job Number: 0603275-134400-221
Well Id. LTMW-S01

Date: 12/2/21
Weather: Cloudy 39
Time In: 09:45 Time Out:

Well Information		TOC	Other
Depth to Water:	(feet)	8.29	
Depth to Bottom:	(feet)	16.92	
Depth to Product:	(feet)		
Length of Water Column:	(feet)	8.64	
Volume of Water in Well:	(gal)	1.38	
Three Well Volumes:	(gal)	4.14	

Well Type:	Flushmount	<input checked="" type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information		Conversion Factors	
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>	gal/ft. of water	1" ID 2" ID 4" ID 6" ID
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input checked="" type="checkbox"/>		0.04 0.16 0.66 1.47
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>		1 gallon=3.785L=3785mL=133.7cu. feet
Average Pumping Rate:	(ml/min) 200	Grundfos Pump	<input type="checkbox"/>
Duration of Pumping:	(min) 30	Polyethylene	<input checked="" type="checkbox"/>
Total Volume Removed:	(gal) 2	Grundfos Pump	<input type="checkbox"/>
Horiba U-52 Water Quality Meter Used?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	Did well go dry?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
09:50	8.33	12.50	8.82	-133	0.373	41.9	0.00	0.247
09:55	8.38	13.29	8.06	-104	0.740	14.6	0.00	0.473
10:00	8.38	13.21	7.94	-104	0.800	1.2	0.00	0.511
10:05	8.38	13.28	7.88	-103	0.801	0.0	0.00	0.515
10:10	8.38	13.33	7.85	-104	0.823	0.0	0.00	0.527
10:15	8.38	13.36	7.82	-104	0.824	0.0	0.00	0.528
10:20	8.38	13.38	7.79	-104	0.824	0.0	0.00	0.527

Sampling Information:		2 - 100ml ambers		Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA SW-846 Method 8270	SVOC PAH's	3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA SW-846 Method 8260	VOC's BTEX	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA Method 335.4	Cyanide	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA Method 200.7	Metals			
Sample ID: LTMW-S01-1221	Duplicate? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Shipped: Pace Courier Pickup	<input checked="" type="checkbox"/>	
Sample Time: 10:20	MS/MSD? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Drop-off Albany Service Center	<input type="checkbox"/>	
Comments/Notes:		Laboratory: Pace Analytical	Greensburg, PA	

Sampling Personnel: Peter Lynn
Job Number: 0603275-134400-221
Well Id. LTMW-D02

Date: 12/2/11
Weather: 40 overcast
Time In: 1346 Time Out: 1425

Well Information		TOC	Other
Depth to Water:	(feet)	<u>10.17</u>	
Depth to Bottom:	(feet)	<u>40.29</u>	<u>36.50</u>
Depth to Product:	(feet)	<u>-</u>	
Length of Water Column:	(feet)	<u>30.12</u>	
Volume of Water in Well:	(gal)	<u>4.81</u>	
Three Well Volumes:	(gal)	<u>14.45</u>	<u>14.45</u>

Well Type: Flushmount ☐ Stick-Up ☒
Well Locked: Yes ☒ No ☐
Measuring Point Marked: Yes ☒ No ☐
Well Material: PVC ☒ SS ☐ Other: ☐
Well Diameter: 1" ☐ 2" ☒ Other: ☐
Comments: ☐

Purging Information

Purging Method: ☐ Bailer ☒ Peristaltic ☐ Grundfos Pump ☐
Tubing/Bailer Material: ☐ Teflon ☒ Stainless St. ☐ Polyethylene ☒
Sampling Method: ☐ Bailer ☒ Peristaltic ☐ Grundfos Pump ☐
Average Pumping Rate: (ml/min) 200
Duration of Pumping: (min) 20
Total Volume Removed: (gal) 2 Did well go dry? Yes ☐ No ☒
Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
<u>1350</u>	<u>11.63</u>	<u>12.48</u>	<u>7.33</u>	<u>-36</u>	<u>0.176</u>	<u>7.1</u>	<u>2.40</u>	<u>0.114</u>
<u>1355</u>	<u>11.99</u>	<u>12.37</u>	<u>7.21</u>	<u>-24</u>	<u>.162</u>	<u>1.8</u>	<u>2.00</u>	<u>.105</u>
<u>1400</u>	<u>12.16</u>	<u>12.32</u>	<u>7.17</u>	<u>-39</u>	<u>.157</u>	<u>0.0</u>	<u>1.46</u>	<u>.102</u>
<u>1405</u>	<u>12.23</u>	<u>12.30</u>	<u>7.16</u>	<u>-47</u>	<u>.156</u>	<u>0.0</u>	<u>1.25</u>	<u>.101</u>
<u>1410</u>	<u>12.30</u>	<u>12.26</u>	<u>7.15</u>	<u>-53</u>	<u>.154</u>	<u>0.0</u>	<u>0.99</u>	<u>.100</u>
<u>1415</u>	<u>12.37</u>	<u>12.27</u>	<u>7.15</u>	<u>-57</u>	<u>.152</u>	<u>0.0</u>	<u>0.93</u>	<u>.099</u>
<u>1420</u>	<u>12.43</u>	<u>12.21</u>	<u>7.16</u>	<u>-60</u>	<u>.150</u>	<u>0.0</u>	<u>0.87</u>	<u>.097</u>

Sampling Information:

EPA SW-846 Method 8270 SVOC PAH's
EPA SW-846 Method 8260 VOC's BTEX
EPA Method 335.4 Cyanide
EPA Method 200.7 Metals

2 - 100ml ambers Yes ☒ No ☐
3 - 40 ml vials Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐

Sample ID: LTMW-D02-1221 Duplicate? Yes ☐ No ☒
Sample Time: 1420 MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
Drop-off Albany Service Center ☐

Laboratory: Pace Analytical
Greensburg, PA

Comments/Notes:

Sampling Personnel: Peter Lyon
Job Number: 0603275-134400-221
Well Id. LTMW-S02

Date: 12/2/21
Weather: 40° Cloudy
Time In: 1428 Time Out: 1505

Well Information		TOC	Other
Depth to Water:	(feet)	<u>9.91</u>	
Depth to Bottom:	(feet)	<u>17.98</u>	<u>18.00</u>
Depth to Product:	(feet)	<u>-</u>	
Length of Water Column:	(feet)	<u>8.07</u>	
Volume of Water in Well:	(gal)	<u>1.29</u>	
Three Well Volumes:	(gal)	<u>3.87</u>	

Well Type:	Flushmount	<input type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information		Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/> Teflon <input type="checkbox"/> Stainless St. <input type="checkbox"/> Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>		Grundfos Pump <input type="checkbox"/> Polyethylene <input checked="" type="checkbox"/> Grundfos Pump <input type="checkbox"/>
Purging Method:				
Tubing/Bailer Material:				
Sampling Method:				
Average Pumping Rate:	(ml/min)	<u>200</u>		
Duration of Pumping:	(min)	<u>30</u>		
Total Volume Removed:	(gal)	<u>2</u>	Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	
Horiba U-52 Water Quality Meter Used?		Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>		

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
1430	10.12	12.61	6.87	-84	.790	30.1	2.55	.505
1435	10.12	12.78	6.85	-95	.786	15.2	0.84	.503
1440	10.11	12.71	6.84	-108	.780	66.1	0.62	.499
1445	10.11	12.78	6.83	-114	.774	39.3	0.64	.495
1450	10.11	12.79	6.82	-116	.771	30.0	0.66	.493
1455	10.11	12.79	6.82	-116	.786	27.6	0.66	.492
1500	10.11	12.78	6.82	-116	.766	33.8	0.67	.490

Sampling Information:		EPA SW-846 Method 8270 EPA SW-846 Method 8260 EPA Method 335.4 EPA Method 200.7		SVOC PAH's VOC's BTEX Cyanide Metals	2 - 100ml ambers 3 - 40 ml vials 1 - 250 ml plastic 1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Sample ID:	<u>LTMW-S02-1221</u>	Duplicate?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Shipped: Pace Courier Pickup <input checked="" type="checkbox"/>		
Sample Time:	<u>1500</u>	MS/MSD?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Drop-off Albany Service Center <input type="checkbox"/>		
Comments/Notes:				Laboratory: Pace Analytical Greensburg, PA		

Sampling Personnel: K
Job Number: 0603275-134400-221
Well Id. LTMW-D03

Date: 12/2/21
Weather: Clear 39
Time In: 10:40 Time Out: _____

Well Information		TOC	Other
Depth to Water:	(feet)	4.69	
Depth to Bottom:	(feet)	40.73	
Depth to Product:	(feet)		
Length of Water Column:	(feet)	20.04	
Volume of Water in Well:	(gal)	3.76	
Three Well Volumes:	(gal)	17.29	

Well Type: Flushmount ☐ Stick-Up ☒
Well Locked: Yes ☒ No ☐
Measuring Point Marked: Yes ☒ No ☐
Well Material: PVC ☒ SS ☐ Other: _____
Well Diameter: 1" ☐ 2" ☒ Other: _____
Comments: _____

Purging Information

Purging Method: _____
Tubing/Bailer Material: _____
Sampling Method: _____
Average Pumping Rate: (ml/min) 2.00
Duration of Pumping: (min) 30
Total Volume Removed: (gal) 7 Did well go dry? Yes ☐ No ☒
Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=133.7cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
10:45	5.55	11.92	8.15	-102	0.845	0.0	0.86	0.591
10:50	6.65	11.13	8.38	-113	0.919	0.0	0.00	0.580
10:55	7.10	10.97	8.46	-117	0.941	0.0	0.00	0.602
11:00	7.68	10.76	8.47	-118	0.961	0.0	0.00	0.617
11:05	8.09	10.70	8.47	-125	0.969	0.0	0.00	0.620
11:10	8.52	10.71	8.54	-127	0.833	0.0	0.00	0.532
11:15	9.02	10.71	8.56	-128	0.839	0.0	0.00	0.537

Sampling Information:

EPA SW-846 Method 8270 SVOC PAH's
EPA SW-846 Method 8260 VOC's BTEX
EPA Method 335.4 Cyanide
EPA Method 200.7 Metals

2 - 100ml ambers Yes ☒ No ☐
3 - 40 ml vials Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐

Sample ID: LTMW-D03-1221 Duplicate? Yes ☐ No ☒
Sample Time: 11:15 MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
Drop-off Albany Service Center ☐

Comments/Notes: _____

Laboratory: Pace Analytical
Greensburg, PA

Sampling Personnel: JK
Job Number: 0603275-134400-221
Well Id. **LTMW-S03**

Date: 12/2/21
Weather: Cloudy
Time In: 11:25 Time Out: 12:00

Well Information		TOC	Other
Depth to Water:	(feet)	<u>3.62</u>	
Depth to Bottom:	(feet)	<u>13.70</u>	
Depth to Product:	(feet)	<u>—</u>	
Length of Water Column:	(feet)	<u>10.08</u>	
Volume of Water in Well:	(gal)	<u>1.61</u>	
Three Well Volumes:	(gal)	<u>4.83</u>	

Well Type:	Flushmount <input type="checkbox"/>	Stick-Up <input checked="" type="checkbox"/>
Well Locked:	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Measuring Point Marked:	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Well Material:	PVC <input checked="" type="checkbox"/> SS <input type="checkbox"/>	Other: <input type="text"/>
Well Diameter:	1" <input type="checkbox"/> 2" <input checked="" type="checkbox"/>	Other: <input type="text"/>
Comments: <input type="text"/>		

Purging Information		Conversion Factors				
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>	gal/ft.	1" ID	2" ID	4" ID	6" ID
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input type="checkbox"/>	of				
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>	water	0.04	0.16	0.66	1.47
Average Pumping Rate:	(ml/min) <u>200</u>	1 gallon=3.785L=3785mL=133.7cu. feet				
Duration of Pumping:	(min) <u>30</u>					
Total Volume Removed:	(gal) <u>—</u>					
Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>						
Horiba U-52 Water Quality Meter Used? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>						

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
11:25	3.65	11.21	7.56	-61	0.000	209	0.62	0.044
11:30	3.65	10.23	8.10	-51	0.606	0.0	2.10	0.421
11:35	3.65	10.28	7.94	-50	0.589	166	0.48	0.372
11:40	3.65	10.20	7.84	-52	0.545	194	0.03	0.349
11:45	3.65	10.15	7.82	-54	0.540	184	0.04	0.345
11:50	3.65	10.15	7.79	-54	0.539	170	0.00	0.345
11:55	3.65	10.25	7.80	-57	0.539	150	0.00	0.345

Sampling Information:		2 - 100ml ambers		Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA SW-846 Method 8270	SVOC PAH's	3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA SW-846 Method 8260	VOC's BTEX	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA Method 335.4	Cyanide	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA Method 200.7	Metals			
Sample ID: LTMW-S03-1221	Duplicate? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Shipped: Pace Courier Pickup <input checked="" type="checkbox"/>		
Sample Time: <u>11:55</u>	MS/MSD? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Drop-off Albany Service Center <input type="checkbox"/>		
Comments/Notes: <input type="text"/>		Laboratory: Pace Analytical Greensburg, PA		

Sampling Personnel: Peters, L.
Job Number: 0603275-134400-221
Well Id. LTMW-D04

Date: 12/02/21
Weather: 39° Heavy Rain
Time In: 1100 Time Out: 1140

Well Information		TOC	Other
Depth to Water:	(feet)	<u>9.57</u>	
Depth to Bottom:	(feet)	<u>46.36</u>	<u>46.20</u>
Depth to Product:	(feet)	<u>-</u>	
Length of Water Column:	(feet)	<u>36.79</u>	
Volume of Water in Well:	(gal)	<u>5.88</u>	
Three Well Volumes:	(gal)	<u>17.65</u>	

Well Type:	Flushmount	<input checked="" type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information		Conversion Factors	
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>	gal/ft. of water	1" ID 2" ID 4" ID 6" ID
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input checked="" type="checkbox"/>		0.04 0.16 0.66 1.47
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/>		
Average Pumping Rate:	(ml/min)		1 gallon=3.785L=3785mL=133.7cu. feet
Duration of Pumping:	(min)		
Total Volume Removed:	(gal)	Did well go dry?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Horiba U-52 Water Quality Meter Used?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>		

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
1105	10.30	11.72	6.34	186	.612	47.5	8.90	.401
1116	10.26	11.05	7.69	193	.628	11.3	1.91	.401
1115	10.41	11.02	7.74	202	.625	2.1	0.94	.400
1120	10.32	10.99	7.74	128	.681	0.3	0.87	.438
1125	10.31	10.97	7.79	-31	.720	1.2	.82	.461
1130	10.32	10.92	7.81	-66	.730	0.0	.76	.468
1135	10.31	10.89	7.81	-79	.732	0.0	.81	.468

Sampling Information:		2 - 100ml ambers		Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA SW-846 Method 8270	SVOC PAH's	3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA SW-846 Method 8260	VOC's BTEX	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA Method 335.4	Cyanide	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
EPA Method 200.7	Metals			
Sample ID: <u>LTMW-D04-1221</u>	Duplicate? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Shipped: Pace Courier Pickup	<input checked="" type="checkbox"/>	
Sample Time: <u>1135</u>	MS/MSD? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Drop-off Albany Service Center	<input type="checkbox"/>	
Comments/Notes:		Laboratory: Pace Analytical	Greensburg, PA	

Sampling Personnel: Peter Lyon

Job Number: 0603275-134400-221

Well Id. LTMW-S04

Date: 12/2/21

Weather: 40° overcast

Time In: 1150

Time Out: 1230

Well Id. **LTMW-S04**

Well Information

		TOC	Other
Depth to Water:	(feet)	9.27	
Depth to Bottom:	(feet)	17.26	17.25
Depth to Product:	(feet)	—	
Length of Water Column:	(feet)	2.99	
Volume of Water in Well:	(gal)	1.22	
Three Well Volumes:	(gal)	3.83	

Well Type: Flushmount ☐ Stick-Up ☒

Well Locked: Yes ☒ No ☐

Measuring Point Marked: Yes ☒ No ☐

Well Material: PVC ☒ SS ☐ Other: _____

Well Diameter: 1" ☐ 2" ☒ Other: _____

Comments: _____

Purging Information		Conversion Factors			
Purging Method:		Bailer	<input type="checkbox"/>	Peristaltic	<input checked="" type="checkbox"/>
Tubing/Bailer Material:		Teflon	<input type="checkbox"/>	Stainless St.	<input type="checkbox"/>
Sampling Method:		Bailer	<input type="checkbox"/>	Peristaltic	<input checked="" type="checkbox"/>
Average Pumping Rate:	(ml/min)	Grundfos Pump <input type="checkbox"/>			
Duration of Pumping:	(min)	Polyethylene <input checked="" type="checkbox"/>			
Total Volume Removed:	(gal)	Grundfos Pump <input type="checkbox"/>			
Horiba U-52 Water Quality Meter Used?		Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>			
		Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>			

1 gallon = 3.785L = 3785mL = 133.7 cu. feet

[illegible]

Sampling Information:			
EPA SW-846 Method 8270	SVOC PAH's	2 - 100ml ambers	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA SW-846 Method 8260	VOC's BTEX	3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA Method 335.4	Cyanide	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA Method 200.7	Metals	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Sample ID: <u>LTMW-S04-1221</u>		Shipped: <u>Pace Courier Pickup</u>	
Duplicate? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		Drop-off Albany Service Center <input type="checkbox"/>	
Sample Time: <u>1225</u>		Laboratory: <u>Pace Analytical</u>	
MS/MSD? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		<u>Greensburg, PA</u>	
Comments/Notes:			

Sampling Personnel: KL
Job Number: 0603275-134400-221
Well Id. **LTMW-D05**

Date: 12/2/21
Weather: Cloudy 59
Time In: 09:45 Time Out: _____

Well Information		TOC	Other
Depth to Water:	(feet)	<u>9.10</u>	
Depth to Bottom:	(feet)	<u>46.53</u>	
Depth to Product:	(feet)	<u>✓</u>	
Length of Water Column:	(feet)	<u>37.43</u>	
Volume of Water in Well:	(gal)	<u>5.48</u>	
Three Well Volumes:	(gal)	<u>17.94</u>	

Well Type: Flushmount ☐ Stick-Up ☒
Well Locked: Yes ☒ No ☐
Measuring Point Marked: Yes ☒ No ☐
Well Material: PVC ☒ SS ☐ Other: _____
Well Diameter: 1" ☐ 2" ☒ Other: _____
Comments: _____

Purging Information

Purging Method: _____
Tubing/Bailer Material: _____
Sampling Method: _____
Average Pumping Rate: (ml/min) 200
Duration of Pumping: (min) 30
Total Volume Removed: (gal) 2
Did well go dry? Yes ☐ No ☒
Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
12:50	9.65	12.03	7.43	77	0.2670	1.3	0.77	0.391
12:55	11.65	12.11	7.90	44	0.361	0.0	0.62	0.234
13:00	12.23	12.13	8.10	50	0.344	0.0	0.59	0.224
13:05	13.50	12.16	8.26	60	0.336	0.0	0.62	0.218
13:10	14.25	12.18	8.32	65	0.333	0.0	0.55	0.216
13:15	14.75	12.18	8.34	64	0.332	0.0	0.41	0.216
13:20	15.30	12.17	8.35	59	0.330	0.0	0.25	0.215

Sampling Information:

EPA SW-846 Method 8270 SVOC PAH's
EPA SW-846 Method 8260 VOC's BTEX
EPA Method 335.4 Cyanide
EPA Method 200.7 Metals

2 - 100ml ambers Yes ☒ No ☐
3 - 40 ml vials Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐

Sample ID: **LTMW-D05-1221** Duplicate? Yes ☐ No ☒
Sample Time: 13:20 MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
Drop-off Albany Service Center ☐

Laboratory: Pace Analytical
Greensburg, PA

Comments/Notes: _____

Sampling Personnel: KE
Job Number: 0603275-134400-221
Well Id. **LTMW-S05**

Date: 12/2/21
Weather: Cloudy 39
Time In: 12:05 Time Out: _____

Well Information		TOC	Other
Depth to Water:	(feet)	9.78	
Depth to Bottom:	(feet)	16.83	
Depth to Product:	(feet)	~	
Length of Water Column:	(feet)		
Volume of Water in Well:	(gal)		
Three Well Volumes:	(gal)		

Well Type:	Flushmount	<input type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information		Conversion Factors				
Purging Method:	Bailer	<input type="checkbox"/>	Peristaltic	<input checked="" type="checkbox"/>	Grundfos Pump	<input type="checkbox"/>
Tubing/Bailer Material:	Teflon	<input type="checkbox"/>	Stainless St.	<input type="checkbox"/>	Polyethylene	<input checked="" type="checkbox"/>
Sampling Method:	Bailer	<input type="checkbox"/>	Peristaltic	<input checked="" type="checkbox"/>	Grundfos Pump	<input type="checkbox"/>
Average Pumping Rate:	(ml/min)	2.00				
Duration of Pumping:	(min)	30				
Total Volume Removed:	(gal)	~				
Did well go dry?		Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>	
Horiba U-52 Water Quality Meter Used?		Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>	

gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47

1 gallon=3.785L=3785mL=1337cu. feet

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
12:10	9.92	10.72	7.86	53	0.528	1.36	0.50	0.338
12:15	10.00	11.05	7.58	37	0.566	3.1	0.28	0.357
12:20	10.00	11.29	7.52	68	0.564	6.0	0.11	0.361
12:25	10.00	11.67	7.47	97	0.563	0.9	0.00	0.361
12:30	10.00	11.72	7.45	100	0.565	0.0	0.00	0.362
12:35	10.00	11.84	7.43	102	0.565	0.0	0.00	0.362
12:40	10.00	11.93	7.41	101	0.566	0.0	0.00	0.362

Sampling Information:		2 - 100ml ambers		Yes <th><input checked="" type="checkbox"/> <th>No <th><input type="checkbox"/> </th></th></th>	<input checked="" type="checkbox"/> <th>No <th><input type="checkbox"/> </th></th>	No <th><input type="checkbox"/> </th>	<input type="checkbox"/>
EPA SW-846 Method 8270	SVOC PAH's	3 - 40 ml vials	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>	
EPA SW-846 Method 8260	VOC's BTEX	1 - 250 ml plastic	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>	
EPA Method 335.4	Cyanide	1 - 250 ml plastic	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>	
EPA Method 200.7	Metals						
Sample ID: LTMW-S05-1221	Duplicate?	Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>		
Sample Time: <u>12:40</u>	MS/MSD?	Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>		
Shipped: Pace Courier Pickup		Drop-off Albany Service Center		<input checked="" type="checkbox"/>			
Laboratory: Pace Analytical		Greensburg, PA					
Comments/Notes:							

Sampling Personnel: K
Job Number: 0603275-134400-221
Well Id. **LTMW-S06**

Date: 12/2/21
Weather: Clear, 39
Time In: 14:10 Time Out: _____

Well Information		TOC	Other
Depth to Water:	(feet)	<u>12.81</u>	
Depth to Bottom:	(feet)	<u>17.60</u>	
Depth to Product:	(feet)	<u>✓</u>	
Length of Water Column:	(feet)		
Volume of Water in Well:	(gal)		
Three Well Volumes:	(gal)		

Well Type: Flushmount ☐ Stick-Up ☒
Well Locked: Yes ☒ No ☐
Measuring Point Marked: Yes ☒ No ☐
Well Material: PVC ☒ SS ☐ Other: _____
Well Diameter: 1" ☐ 2" ☒ Other: _____
Comments: _____

Purging Information

Purging Method: _____
Tubing/Bailer Material: _____
Sampling Method: _____
Average Pumping Rate: (ml/min) 200
Duration of Pumping: (min) 30
Total Volume Removed: (gal) 2
Did well go dry? Yes ☐ No ☒
Horiba U-52 Water Quality Meter Used? Yes ☒ No ☐

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
<u>14:15</u>	<u>12.98</u>	<u>13.21</u>	<u>7.28</u>	<u>51</u>	<u>0.969</u>	<u>27.7</u>	<u>1.03</u>	<u>0.557</u>
<u>14:20</u>	<u>12.98</u>	<u>13.36</u>	<u>7.02</u>	<u>-1</u>	<u>0.947</u>	<u>11.4</u>	<u>0.39</u>	<u>0.607</u>
<u>14:25</u>	<u>12.98</u>	<u>13.58</u>	<u>7.08</u>	<u>-6</u>	<u>0.975</u>	<u>0.00</u>	<u>0.00</u>	<u>0.629</u>
<u>14:30</u>	<u>12.98</u>	<u>13.59</u>	<u>7.08</u>	<u>-7</u>	<u>0.978</u>	<u>0.0</u>	<u>0.00</u>	<u>0.626</u>
<u>14:35</u>	<u>12.98</u>	<u>13.60</u>	<u>7.08</u>	<u>-7</u>	<u>0.982</u>	<u>0.0</u>	<u>0.00</u>	<u>0.628</u>
<u>14:40</u>	<u>12.98</u>	<u>13.61</u>	<u>7.08</u>	<u>-8</u>	<u>0.984</u>	<u>0.0</u>	<u>0.00</u>	<u>0.630</u>
<u>14:45</u>	<u>12.98</u>	<u>13.61</u>	<u>7.07</u>	<u>-8</u>	<u>0.984</u>	<u>0.0</u>	<u>0.00</u>	<u>0.630</u>

Sampling Information:

EPA SW-846 Method 8270 SVOC PAH's
EPA SW-846 Method 8260 VOC's BTEX
EPA Method 335.4 Cyanide
EPA Method 200.7 Metals

2 - 100ml ambers Yes ☒ No ☐
3 - 40 ml vials Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐
1 - 250 ml plastic Yes ☒ No ☐

Sample ID: **LTMW-S06-1221** Duplicate? Yes ☐ No ☒
Sample Time: 14:45 MS/MSD? Yes ☐ No ☒

Shipped: Pace Courier Pickup ☒
Drop-off Albany Service Center ☐

Comments/Notes: _____

Laboratory: Pace Analytical
Greensburg, PA

Sampling Personnel: Peter Lyon
Job Number: 0603275-134400-221
Well Id. LTMW-S07

Date: 12/2/21
Weather: 40° overcast
Time In: 1253 Time Out: 1330

Well Information		TOC	Other
Depth to Water:	(feet)	<u>10.31</u>	
Depth to Bottom:	(feet)	<u>17.82</u>	<u>17.60</u>
Depth to Product:	(feet)	<u>-</u>	
Length of Water Column:	(feet)	<u>7.51</u>	
Volume of Water in Well:	(gal)	<u>1.20</u>	
Three Well Volumes:	(gal)	<u>3.60</u>	

Well Type:	Flushmount	<input checked="" type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information	
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/> Grundfos Pump <input type="checkbox"/>
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input type="checkbox"/> Polyethylene <input checked="" type="checkbox"/>
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/> Grundfos Pump <input type="checkbox"/>
Average Pumping Rate:	(ml/min) <u>200</u>
Duration of Pumping:	(min) <u>30</u>
Total Volume Removed:	(gal) <u>2</u>
Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	
Horiba U-52 Water Quality Meter Used? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=133.7cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
1255	11.23	12.28	6.97	-72	.800	4.3	2.32	.512
1300	11.45	12.99	6.97	-123	.798	0.5	0.89	.511
1305	11.55	13.06	6.96	-132	.808	0.4	0.94	.514
1310	11.66	13.12	6.94	-135	.811	0.0	0.87	.519
1315	11.76	13.12	6.94	-137	.812	0.0	0.84	.520
1320	11.81	13.16	6.93	-137	.815	0.0	0.78	.521
1325	11.89	13.20	6.92	-137	.815	0.0	0.82	.522

Sampling Information:	
EPA SW-846 Method 8270	SVOC PAH's
EPA SW-846 Method 8260	VOC's BTEX
EPA Method 335.4	Cyanide
EPA Method 200.7	Metals
Sample ID: <u>LTMW-S07-1221</u>	Duplicate? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Sample Time: <u>13.25</u>	MS/MSD? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Comments/Notes:	
Shipped: Pace Courier Pickup <input checked="" type="checkbox"/> Drop-off Albany Service Center <input type="checkbox"/>	
Laboratory: Pace Analytical Greensburg, PA	

Sampling Personnel: Peter Lyon
Job Number: 0603275-134400-221
Well Id. LTMW-S08

Date: 12/02/21
Weather: 39° overcast
Time In: 1018 Time Out: 1100

Well Information		TOC	Other
Depth to Water:	(feet)	<u>15.14</u>	
Depth to Bottom:	(feet)	<u>17.39</u>	<u>17.30</u>
Depth to Product:	(feet)	<u>—</u>	
Length of Water Column:	(feet)	<u>2.25</u>	
Volume of Water in Well:	(gal)	<u>0.36</u>	
Three Well Volumes:	(gal)	<u>1.08</u>	

Well Type:	Flushmount	<input type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information	
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/> Grundfos Pump <input type="checkbox"/>
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input type="checkbox"/> Polyethylene <input checked="" type="checkbox"/>
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/> Grundfos Pump <input type="checkbox"/>
Average Pumping Rate:	(ml/min) <u>200</u>
Duration of Pumping:	(min) <u>30</u>
Total Volume Removed:	(gal) <u>2</u>
Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	
Horiba U-52 Water Quality Meter Used? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=133.7cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
1020	15.21	11.40	6.85	113	.522	55.2	11.50	.327
1025	15.21	11.53	6.80	101	.482	50.2	6.03	.313
1030	15.24	11.92	6.75	131	.530	29.3	3.73	.339
1035	15.25	11.97	6.75	136	.548	27.3	4.01	.352
1040	15.23	11.96	6.75	140	.568	19.4	2.87	.365
1045	15.23	11.93	6.75	134	.599	13.9	2.42	.384
1050	15.23	11.87	6.75	126	.616	12.5	2.79	.395

Sampling Information:	
EPA SW-846 Method 8270	SVOC PAH's
EPA SW-846 Method 8260	VOC's BTEX
EPA Method 335.4	Cyanide
EPA Method 200.7	Metals
2 - 100ml ambers	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Sample ID: <u>LTMW-S08-1221</u>	Duplicate? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Sample Time: <u>1050</u>	MS/MSD? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Shipped: Pace Courier Pickup <input checked="" type="checkbox"/>	
Drop-off Albany Service Center <input type="checkbox"/>	
Laboratory: Pace Analytical Greensburg, PA	
Comments/Notes:	

Sampling Personnel: K
Job Number: 0603275-134400-221
Well Id. **LTMW-S09**

Date: 12/2/9
Weather: Cloudy
Time In: 13:25 Time Out:

Well Information		TOC	Other
Depth to Water:	(feet)	<u>9.32</u>	
Depth to Bottom:	(feet)	16.92	
Depth to Product:	(feet)		
Length of Water Column:	(feet)	<u>7.6</u>	
Volume of Water in Well:	(gal)	<u>1.21</u>	
Three Well Volumes:	(gal)	<u>3.64</u>	

Well Type:	Flushmount	<input checked="" type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information	
Purging Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/> Grundfos Pump <input type="checkbox"/>
Tubing/Bailer Material:	Teflon <input type="checkbox"/> Stainless St. <input type="checkbox"/> Polyethylene <input checked="" type="checkbox"/>
Sampling Method:	Bailer <input type="checkbox"/> Peristaltic <input checked="" type="checkbox"/> Grundfos Pump <input type="checkbox"/>
Average Pumping Rate:	(ml/min) <u>205</u>
Duration of Pumping:	(min) <u>30</u>
Total Volume Removed:	(gal) <u>2</u>
Did well go dry? Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	
Horiba U-52 Water Quality Meter Used? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=1337cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
13:25	9.49	12.14	7.99	127	0.665	87.3	2.77	0.428
13:33	9.50	12.25	7.44	142	0.727	3.6	1.77	0.464
13:40	9.50	12.35	7.57	146	0.744	0.0	1.67	0.474
13:45	9.50	12.53	7.49	151	0.787	0.0	1.28	0.501
13:50	9.50	12.65	7.44	154	0.807	0.0	1.24	0.518
13:55	9.50	12.82	7.41	157	0.843	0.0	1.11	0.540
14:00	9.50	12.89	7.40	159	0.849	0.0	0.91	0.543

Sampling Information:			
EPA SW-846 Method 8270	SVOC PAH's	4 - 100ml ambers	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA SW-846 Method 8260	VOC's BTEX	3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA Method 335.4	Cyanide	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA Method 200.7	Metals	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Field Duplicate 1221			
Sample ID: LTMW-S09-1221	Duplicate?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	Shipped: Pace Courier Pickup <input checked="" type="checkbox"/>
Sample Time: <u>14:00</u>	MS/MSD?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Drop-off Albany Service Center <input type="checkbox"/>
Comments/Notes:		Laboratory: Pace Analytical Greensburg, PA	

Sampling Personnel: Peter Lyon
Job Number: 0603275-134400-221
Well Id. LTMW-S10

Date: 12/02/21
Weather: 39° overcast
Time In: 0914 Time Out: 0950

Well Information			TOC	Other
Depth to Water:	(feet)	<u>9.89</u>		
Depth to Bottom:	(feet)	<u>17.18</u>	<u>12.15</u>	
Depth to Product:	(feet)	<u>—</u>		
Length of Water Column:	(feet)	<u>8.29</u>		
Volume of Water in Well:	(gal)	<u>1.32</u>		
Three Well Volumes:	(gal)	<u>3.97</u>		

Well Type:	Flushmount	<input type="checkbox"/>	Stick-Up	<input checked="" type="checkbox"/>
Well Locked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Measuring Point Marked:	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
Well Material:	PVC	<input checked="" type="checkbox"/>	SS	<input type="checkbox"/>
Well Diameter:	1"	<input type="checkbox"/>	2"	<input checked="" type="checkbox"/>
Comments:				

Purging Information					
Purging Method:	Bailer	<input type="checkbox"/>	Peristaltic	<input checked="" type="checkbox"/>	
Tubing/Bailer Material:	Teflon	<input type="checkbox"/>	Stainless St.	<input type="checkbox"/>	
Sampling Method:	Bailer	<input type="checkbox"/>	Peristaltic	<input checked="" type="checkbox"/>	
Average Pumping Rate:	(ml/min)	<u>200</u>	Grundfos Pump	<input type="checkbox"/>	
Duration of Pumping:	(min)	<u>30</u>	Polyethylene	<input checked="" type="checkbox"/>	
Total Volume Removed:	(gal)	<u>2</u>	Grundfos Pump	<input type="checkbox"/>	
Did well go dry?		Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>
Horiba U-52 Water Quality Meter Used?		Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>

Conversion Factors				
gal/ft. of water	1" ID	2" ID	4" ID	6" ID
	0.04	0.16	0.66	1.47
1 gallon=3.785L=3785mL=133.7cu. feet				

Time	DTW (feet)	Temp (°C)	pH	ORP (mV)	Conductivity (mS/cm)	Turbidity (NTU)	DO (mg/L)	TDS (g/L)
0915	10.20	9.37	7.66	203	.986	34.8	8.59	0.629
0920	10.31	11.29	6.95	199	.983	25.4	6.90	0.629
0925	10.42	11.54	6.92	183	.983	119	6.86	0.629
0930	10.51	11.73	6.92	180	.981	58.2	6.55	0.628
0935	10.60	12.27	6.91	178	.983	9.5	6.27	0.629
0940	10.61	12.07	6.90	175	.981	13.0	6.04	0.627
0945	10.61	12.08	6.90	177	.983	6.8	5.77	0.629

Sampling Information:			
EPA SW-846 Method 8270	SVOC PAH's	6 - 100ml ambers	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA SW-846 Method 8260	VOC's BTEX	3 - 40 ml vials	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA Method 335.4	Cyanide	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
EPA Method 200.7	Metals	1 - 250 ml plastic	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
LTMW-S10-MS-1221	LTMW-S10-MSD-1221		
Sample ID: <u>LTMW-S10-1221</u>	Duplicate?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	Shipped: <u>Pace Courier Pickup</u>
Sample Time: <u>0945</u>	MS/MSD?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	Drop-off Albany Service Center <input type="checkbox"/>
Comments/Notes:		Laboratory: <u>Pace Analytical</u> <u>Greensburg, PA</u>	



CHAIN-OF-CUSTODY / Analytical Request Document

The Chain-of-Custody is a LEGAL DOCUMENT. All relevant fields must be completed accurately.

Page: 1 of 2

Section A

Required Client Information:

Company: GES - Syracuse
Address: 6780 Northern BLVD, Suite 100
East Syracuse, New York 13057
Email To: dshay@gesonline.com
Phone: 800.220.3059 Fax: None
Requested Due Date/TAT: Standard

Section B

Required Project Information:

Report To: Devin Shay (GES)
dshay@gesonline.com
Report To: Tim Beaumont (GES)
tbeaumont@gesonline.com
Purchase Order No.:
Project Name: National Grid - Rome
Kingsley Ave. Site, Rome, NY
Project Number:
0603275-134400-221-1106

Section C

Invoice Information:

Attention: Accounts Payable via email at ges-invoices@gesonline.com
Company Name: Groundwater & Environmental Services, Inc.
Address: 5 Technology Place, Suite 4, East Syracuse, NY 13057
Pace Quote Reference:
Pace Project Manager: Rachel Christner

REGULATORY AGENCY

NPDES GROUND WATER DRINKING WATER

UST RCRA OTHER

SITE

GA

IL

IN

IT

MA

MD

MI

MO

MT

NE

NH

LOCATION

OH

SC

VA

WI

WV

WY

Other

Filtered (Y/N)

Requested Analysis:

PTX (828C)
SVOCs (PAHs (8270))
Organics (8284)
Metals (8284)
Pb (8284)
Cu (8284)
Zn (8284)
Cd (8284)
Mn (8284)
Fe (8284)
Ni (8284)
Cr (8284)
Co (8284)
Mg (8284)
Ca (8284)
Na (8284)
K (8284)
Cl (8284)
F (8284)
Br (8284)
I (8284)
S (8284)
P (8284)
B (8284)
Al (8284)
Si (8284)
Mg (8284)
Ca (8284)
Na (8284)
K (8284)
Cl (8284)
F (8284)
Br (8284)
I (8284)
S (8284)
P (8284)
B (8284)
Al (8284)
Si (8284)

Pace Project Number Lab I.D.

ITEM #	Section D Required Client Information		MATRIX CODE	SAMPLE TYPE	G-GRAB	C-COMP	COLLECTED				SAMPLE TEMP AT COLLECTION	#OF CONTAINERS	Preservatives										Requested Analysis:												
	SAMPLE ID						DATE		TIME				COMPOSITE START		GRAB		Unpreserved	H ₂ SO ₄	HNO ₃	HCl	NaOH	Na ₂ SO ₄		Methanol	Other	Pace Project Number Lab I.D.									
Valid Matrix Codes		CODE																																	
MATRIX		OW																																	
DRINKING WATER		WT																																	
WATER		WW																																	
WASTEWATER		P																																	
PRODUCT		O																																	
SOLID		C																																	
OIL		O																																	
WIPE		W																																	
AIR		A																																	
OTHER		O																																	
TISUE		T																																	

1	LTMW-D01-1221	WT	G				09:40		7	2	1	3	1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
---	---------------	----	---	--	--	--	-------	--	---	---	---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Additional Comments:

SAMPLES WILL ARRIVE IN

COOLERS.

Please send reports to: dshay@gesonline.com, tbeaumont@gesonline.com

NERegion@gesonline.com, ges@equisonline.com

SPECIFIC EDD NAME:

NGRome-lab1 ber.28351.EQEDD.zip

RELINQUISHED BY / AFFILIATION:

DATE

TIME

ACCEPTED BY / AFFILIATION:

DATE

TIME

SAMPLE CONDITIONS

Temp in °C	Received on Ice	Custody Sealed Cooler	Samples Intact
Y/N	Y/N	Y/N	Y/N
Y/N	Y/N	Y/N	Y/N
Y/N	Y/N	Y/N	Y/N
Y/N	Y/N	Y/N	Y/N

SAMPLER NAME AND SIGNATURE

PRINT NAME OF SAMPLER:

SIGNATURE OF SAMPLER:

DATE SIGNATURE / DAY / YEAR



Appendix D – Data Usability Summary Report and Analytical Data



Groundwater & Environmental Services, Inc.

708 North Main Street, Suite 201
Blacksburg, VA 24060

T. 800.662.5067

February 14, 2022

Devin Shay
Groundwater & Environmental Services, Syracuse
6780 Northern Blvd., Suite 100
East Syracuse, NY 13057.

RE: Data Usability Summary Report for National Grid- Rome Kingsley Avenue Site Data Packages Pace Analytical Job Nos. 30453471, 30453473

Groundwater & Environmental Services, Inc. (GES) reviewed two data packages (Laboratory Project Number 30453471, 30453473) from Pace Analytical Services, Inc., for the analysis of an effluent sample and trip blank as well as groundwater samples collected in December 2021 from monitoring wells located at the National Grid: Rome Kingsley Avenue Site. Sixteen aqueous samples and a field duplicate were analyzed for BTEX, PAHs, arsenic, lead, zinc, and total cyanide. The effluent system sample was processed for volatiles, eight metals, mercury, pH and total cyanide. Methodologies utilized are those of the USEPA 200.7, 335.4, SM 4500H+B, the USEPA SW846 methods 8260C/8270D(SIM) with additional QC requirements of the NYSDEC ASP.

The data are reported as part of a complete full deliverable type B data validation. This usability report is generated from review of the following:

- Laboratory Narrative Discussion
- Custody Documentation
- Holding Times
- Surrogate and Internal Standard Recoveries
- Matrix Spike Recoveries/Duplicate (MS/MSD) Correlations
- Field Duplicate Correlations
- Laboratory Control Sample (LCS)
- Preparation/Calibration Blanks
- Calibration/Low Level Standard Responses
- Instrumental Tunes
- Instrument MDLs
- Sample Quantitation and Identification

The items listed above which show deficiencies are discussed within the text of this narrative.

All of the other items are determined to be acceptable for the DUSR level review.

Table 1 – Data Qualifications

Sample ID	Qualifier	Analyte	Reason for qualification
	J	pH	Analyzed after holding time
Effluent	J	Acetone	Low RRF
	J	Bromomethane	RPD>30%
LTMW-S01	UJ-	Cyanide	Low MS/MSD recovery

In summary, sample results are usable as reported, with non-compliances noted. The result for pH in all applicable samples was qualified by the laboratory as estimated due to the short hold time of 15 minutes. Qualifications are detailed in Table 1.

The laboratory case narratives and sample identification summary forms are attached to this text, and should be reviewed in conjunction with this report.

Custody Documentation

- All samples arrived within the EPA acceptable range of $4^{\circ}\text{C} \pm 2^{\circ}\text{C}$.

BTEX and TCL Volatiles by EPA 8260C/NYSDEC ASP

Sample holding times for groundwater and effluent samples and instrumental tune fragmentations are within acceptance ranges. Surrogate and internal standard recoveries are within required limits.

The relative response factor for acetone in the initial calibration associated with the analysis of the effluent sample was below minimum requirements. Acetone is qualified as estimated in all associated samples. Calibrations standards show acceptable responses within analytical protocol and validation action limits with the exception of high recovery for non-detected analytes associated with the effluent and effluent samples. The compounds were not reported above detections limit; no qualification was required.

The LCS associated with the effluent samples reported high recoveries for acetone, chloroethane, and vinyl chloride. The sample did not report positive detections for these compounds, and no data is qualified.

Matrix spike and matrix spike recoveries were within laboratory specified criteria with the following exceptions:

- For the MS/MSD associated with the effluent sample, RPDs were out of specification for bromomethane.

- For the MS/MSD associated with the effluent sample, recoveries were low in the below analytes:
 - 2-Hexanone
 - MIBK

There were no positive detections of the above analytes in the effluent sample, and the data is not affected.

PAHs by EPA8270D/NYSDEC ASP

Holding times are met. Instrumental tune fragmentations are within acceptance ranges. Surrogate recoveries are within analytical and validation guidelines. Blanks show no contamination. Calibration standards, both initial and continuing, show acceptable responses within analytical method protocols and validation guidelines with the following exceptions:

The blind field duplicate correlations of LTMW-S09 were not calculated, as there were no detections above reporting limit.

The laboratory control spike recoveries and precision indicate the method is within laboratory control, with the exception of a high recovery for Dibenz(a,h)anthracene. The samples were not detected for this analyte, and the high bias does not affect reported results. Matrix spike and matrix spike recoveries were within laboratory specified criteria or, with the exception of a variety of high recoveries for analytes that did not have associated positive detections in the samples. Naphthalene in the effluent sample reported a high recovery in the MSD. The detected concentration for this analyte is qualified as estimated with a possible high bias.

Benzo(b)fluoranthene and Benzo(k)fluoranthene are not sufficiently separated in the chromatogram, and should be noted that any quantification is qualified as estimated.

Metals by EPA 200.7/EPA 245.3/NYSDEC ASP

The matrix spikes and post digestion spikes show acceptable accuracy and precision. Initial and continuing calibration recoveries were within criteria. CRDL Check standard recoveries were within criteria, and there was no indication of any interfering component affecting the data. The blind field duplicate correlations of LTMW-S09 were not calculated, as there were no detections above reporting limit.

Instrument performance is compliant, and blanks show no contamination above the reporting limit.

Wet Chemistry-Total Cyanide by 9012B and pH

Review was conducted for method compliance, holding times, transcription, calculations, standard and blank acceptability, accuracy and precision, etc., as applicable to each procedure. All are acceptable for the validated sample. Calibration standard responses are compliant. Blanks show no detections above the reporting limits.

The pH for the Effluent sample is qualified as estimated due to outlying holding time, as noted in the laboratory case narrative.

The recoveries for cyanide in the MS/MSD associated with the LTMW-S01-1221 reported low. Cyanide is qualified as estimated with a possible low bias.

All other associated matrix spikes and/or laboratory duplicates of total cyanide show acceptable recoveries. Qualifications are noted in Table 1.

Data Package Completeness

Complete NYSDEC Category B deliverables were included in the laboratory data package, all information required for validation of the data is present.

Please do not hesitate to contact me if you have comments or questions regarding this report.

Sincerely,

A handwritten signature in blue ink, reading 'B Janowiak', with a long horizontal flourish extending to the right.

Bonnie Janowiak, Ph.D.
Senior Chemist

SAMPLE SUMMARY

Project: National Grid - Rome Kingsley

Pace Project No.: 30453473

Lab ID	Sample ID	Matrix	Date Collected	Date Received
30453473001	LTMW-D01-1221	Water	12/02/21 09:40	12/04/21 09:54
30453473002	LTMW-S01-1221	Water	12/02/21 10:20	12/04/21 09:54
30453473003	LTMW-D02-1221	Water	12/02/21 14:20	12/04/21 09:54
30453473004	LTMW-S02-1221	Water	12/02/21 15:00	12/04/21 09:54
30453473005	LTMW-D03-1221	Water	12/02/21 11:15	12/04/21 09:54
30453473006	LTMW-S03-1221	Water	12/02/21 11:55	12/04/21 09:54
30453473007	LTMW-D04-1221	Water	12/02/21 11:35	12/04/21 09:54
30453473008	LTMW-S04-1221	Water	12/02/21 12:25	12/04/21 09:54
30453473009	LTMW-D05-1221	Water	12/02/21 13:20	12/04/21 09:54
30453473010	LTMW-S05-1221	Water	12/02/21 12:40	12/04/21 09:54
30453473011	LTMW-D06-1221	Water	12/02/21 15:25	12/04/21 09:54
30453473012	LTMW-S06-1221	Water	12/02/21 14:45	12/04/21 09:54
30453473013	LTMW-S07-1221	Water	12/02/21 13:25	12/04/21 09:54
30453473014	LTMW-S08-1221	Water	12/02/21 10:50	12/04/21 09:54
30453473015	LTMW-S09-1221	Water	12/02/21 14:00	12/04/21 09:54
30453473016	LTMW-S10-1221	Water	12/02/21 09:45	12/04/21 09:54
30453473017	LTMW-S10-MS-1221	Water	12/02/21 09:45	12/04/21 09:54
30453473018	LTMW-S10-MSD-1221	Water	12/02/21 09:45	12/04/21 09:54
30453473019	Field Duplicate-1221	Water	12/02/21 00:01	12/04/21 09:54
30453473020	Trip Blank	Water	12/02/21 00:01	12/04/21 09:54

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453473

Method: EPA 200.7

Description: 200.7 Metals, Total

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 20, 2021

General Information:

19 samples were analyzed for EPA 200.7 by Pace Analytical Services Long Island. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 200.7 with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Duplicate Sample:

All duplicate sample results were within method acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453473

Method: EPA 8270D by SIM

Description: 8270D PAH SIM Reduced Volume

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 20, 2021

General Information:

19 samples were analyzed for EPA 8270D by SIM by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 3510C with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Internal Standards:

All internal standards were within QC limits with any exceptions noted below.

Surrogates:

All surrogates were within QC limits with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453473

Method: EPA 8260C

Description: 8260C MSV

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 20, 2021

General Information:

20 samples were analyzed for EPA 8260C by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Internal Standards:

All internal standards were within QC limits with any exceptions noted below.

Surrogates:

All surrogates were within QC limits with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453473

Method: EPA 335.4

Description: 335.4 Cyanide, Total

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 20, 2021

General Information:

19 samples were analyzed for EPA 335.4 by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 335.4 with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

QC Batch: 475175

A matrix spike and/or matrix spike duplicate (MS/MSD) were performed on the following sample(s): 30448505005,30453473002

ML: Matrix spike recovery and/or matrix spike duplicate recovery was below laboratory control limits. Result may be biased low.

- MS (Lab ID: 2295521)
 - Cyanide
- MS (Lab ID: 2295690)
 - Cyanide
- MSD (Lab ID: 2295522)
 - Cyanide
- MSD (Lab ID: 2295691)
 - Cyanide

QC Batch: 475541

A matrix spike and/or matrix spike duplicate (MS/MSD) were performed on the following sample(s): 30453473010,30453473019

MH: Matrix spike recovery and/or matrix spike duplicate recovery was above laboratory control limits. Result may be biased high.

- MS (Lab ID: 2297147)
 - Cyanide

QC Batch: 476140

A matrix spike and/or matrix spike duplicate (MS/MSD) were performed on the following sample(s): 30453473016,30454588001

ML: Matrix spike recovery and/or matrix spike duplicate recovery was below laboratory control limits. Result may be biased low.

- MS (Lab ID: 2299934)
 - Cyanide

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453473

Method: EPA 335.4

Description: 335.4 Cyanide, Total

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 20, 2021

Additional Comments:

This data package has been reviewed for quality and completeness and is approved for release.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

SAMPLE SUMMARY

Project: National Grid - Rome Kingsley

Pace Project No.: 30453471

Lab ID	Sample ID	Matrix	Date Collected	Date Received
30453471001	Effluent System 1221	Water	12/02/21 08:00	12/04/21 09:54
30453471002	Trip Blank	Water	12/02/21 00:01	12/04/21 09:54

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453471

Method: EPA 200.7

Description: 200.7 Metals, Total

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 27, 2021

General Information:

1 sample was analyzed for EPA 200.7 by Pace Analytical Services Long Island. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 200.7 with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

QC Batch: 236835

A matrix spike and/or matrix spike duplicate (MS/MSD) were performed on the following sample(s): 70197395001,70197480001

M1: Matrix spike recovery exceeded QC limits. Batch accepted based on laboratory control sample (LCS) recovery.

- MS (Lab ID: 1195792)
- Copper

Duplicate Sample:

All duplicate sample results were within method acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453471

Method: EPA 245.1

Description: 245.1 Mercury

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 27, 2021

General Information:

1 sample was analyzed for EPA 245.1 by Pace Analytical Services Long Island. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 245.1 with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Duplicate Sample:

All duplicate sample results were within method acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453471

Method: EPA 8270D by SIM

Description: 8270D PAH SIM Reduced Volume

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 27, 2021

General Information:

1 sample was analyzed for EPA 8270D by SIM by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 3510C with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

Internal Standards:

All internal standards were within QC limits with any exceptions noted below.

Surrogates:

All surrogates were within QC limits with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453471

Method: EPA 8260C

Description: 8260C MSV

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 27, 2021

General Information:

2 samples were analyzed for EPA 8260C by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Initial Calibrations (including MS Tune as applicable):

All criteria were within method requirements with any exceptions noted below.

Continuing Calibration:

All criteria were within method requirements with any exceptions noted below.

QC Batch: 476526

CH: The continuing calibration for this compound is outside of Pace Analytical acceptance limits. The results may be biased high.

- BLANK (Lab ID: 2301993)
 - Chloroethane
 - Vinyl chloride
- Effluent System 1221 (Lab ID: 30453471001)
 - Chloroethane
 - Vinyl chloride
- LCS (Lab ID: 2301994)
 - Chloroethane
 - Vinyl chloride
- MS (Lab ID: 2302812)
 - Chloroethane
 - Vinyl chloride
- MSD (Lab ID: 2302813)
 - Chloroethane
 - Vinyl chloride
- Trip Blank (Lab ID: 30453471002)
 - Chloroethane
 - Vinyl chloride

Internal Standards:

All internal standards were within QC limits with any exceptions noted below.

Surrogates:

All surrogates were within QC limits with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453471

Method: EPA 8260C

Description: 8260C MSV

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 27, 2021

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

QC Batch: 476526

L1: Analyte recovery in the laboratory control sample (LCS) was above QC limits. Results for this analyte in associated samples may be biased high.

- LCS (Lab ID: 2301994)
 - 1,1,2,2-Tetrachloroethane
 - Chloroethane
 - Vinyl chloride

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

QC Batch: 476526

A matrix spike and/or matrix spike duplicate (MS/MSD) were performed on the following sample(s): 30453471001

ML: Matrix spike recovery and/or matrix spike duplicate recovery was below laboratory control limits. Result may be biased low.

- MS (Lab ID: 2302812)
 - 2-Hexanone
 - 4-Methyl-2-pentanone (MIBK)
- MSD (Lab ID: 2302813)
 - 2-Hexanone
 - 4-Methyl-2-pentanone (MIBK)

R1: RPD value was outside control limits.

- MSD (Lab ID: 2302813)
 - Bromomethane

Additional Comments:

Analyte Comments:

QC Batch: 476526

1c: The analyte did not meet the method recommended minimum RF.

- BLANK (Lab ID: 2301993)
 - Acetone
- Effluent System 1221 (Lab ID: 30453471001)
 - Acetone
- LCS (Lab ID: 2301994)
 - Acetone
- MS (Lab ID: 2302812)
 - Acetone
- MSD (Lab ID: 2302813)
 - Acetone
- Trip Blank (Lab ID: 30453471002)
 - Acetone

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453471

Method: SM 4500H+B-2011

Description: 4500H+ pH, Electrometric

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 27, 2021

General Information:

1 sample was analyzed for SM 4500H+B-2011 by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

H3: Sample was received or analysis requested beyond the recognized method holding time.

- Effluent System 1221 (Lab ID: 30453471001)

H6: Analysis initiated outside of the 15 minute EPA required holding time.

- Effluent System 1221 (Lab ID: 30453471001)

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

Duplicate Sample:

All duplicate sample results were within method acceptance criteria with any exceptions noted below.

Additional Comments:

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

PROJECT NARRATIVE

Project: National Grid - Rome Kingsley

Pace Project No.: 30453471

Method: EPA 335.4

Description: 335.4 Cyanide, Total

Client: Groundwater & Environmental Services, Inc. (Syracuse)

Date: December 27, 2021

General Information:

1 sample was analyzed for EPA 335.4 by Pace Analytical Services Greensburg. All samples were received in acceptable condition with any exceptions noted below or on the chain-of custody and/or the sample condition upon receipt form (SCUR) attached at the end of this report.

Hold Time:

The samples were analyzed within the method required hold times with any exceptions noted below.

Sample Preparation:

The samples were prepared in accordance with EPA 335.4 with any exceptions noted below.

Method Blank:

All analytes were below the report limit in the method blank, where applicable, with any exceptions noted below.

Laboratory Control Spike:

All laboratory control spike compounds were within QC limits with any exceptions noted below.

Matrix Spikes:

All percent recoveries and relative percent differences (RPDs) were within acceptance criteria with any exceptions noted below.

QC Batch: 475175

A matrix spike and/or matrix spike duplicate (MS/MSD) were performed on the following sample(s): 30448505005,30453473002

ML: Matrix spike recovery and/or matrix spike duplicate recovery was below laboratory control limits. Result may be biased low.

- MS (Lab ID: 2295521)
 - Cyanide
- MS (Lab ID: 2295690)
 - Cyanide
- MSD (Lab ID: 2295522)
 - Cyanide
- MSD (Lab ID: 2295691)
 - Cyanide

Additional Comments:

This data package has been reviewed for quality and completeness and is approved for release.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.