



RECORD OF DECISION

Endicott Well Field

Village of Endicott, Broome County, New York 704008

United States Environmental Protection Agency Region II New York, New York September 1992

DECLARATION FOR THE RECORD OF DECISION

SITE NAME AND LOCATION

Endicott Well Field Site

Village of Endicott, Broome County, New York

STATEMENT OF BASIS AND PURPOSE

This decision document presents the selected remedial action for the Endicott Well Field Site (the "Site"), which was chosen in accordance with the requirements of the Comprehensive Environmental Response, Compensation, and Liability Act of 1980, as amended ("CERCLA"), and the National Oil and Hazardous Substances Pollution Contingency Plan ("NCP"). This decision document explains the factual and legal basis for selecting the remedy for this Site.

The New York State Department of Environmental Conservation ("NYSDEC") concurs with the selected remedy. A letter of concurrence from NYSDEC is attached to this document (Appendix IV).

The information supporting this remedial action decision is contained in the Administrative Record file for this Site. The index to the Administrative Record file is attached (Appendix III).

ASSESSMENT OF THE SITE

Actual or threatened releases of hazardous substances from this Site, if not addressed by implementing the response action selected by this Record of Decision ("ROD"), may present an imminent and substantial endangerment to public health, welfare, or the environment.

DESCRIPTION OF THE SELECTED REMEDY

This operable unit ("OU") is OU #2, the third and final OU planned for the Site. EPA issued RODs for OU #1 and OU #3 in September 1987 and March 1991, respectively. The ROD for OU #1 addressed ground water contamination at the ranney well public water supply system, which was the immediate threat to human health posed by the Site, by requiring the installation of an air stripper on the ranney well and continued extraction and treatment of contaminated ground water using the existing purge well on the En-Joie Golf Course. The ROD for OU #3 provided additional ground water control and treatment by requiring the use of a supplemental purge well. This OU #2 ROD addresses the source of ground water contamination, identified as the Endicott Landfill ("Landfill #1" or the "Landfill"),

through landfill capping, gas venting, and control and treatment of the leachate seep. Long term management will be required to maintain these systems.

The major components of the selected remedy include the following:

- * Capping the majority of the surface of Landfill #1 with a low permeability soil barrier cap, with a variance of 6NYCRR Part 360 requirements, to allow for a minimum of 12 inches of protective barrier fill with a permeability of 10⁻⁵ cm/sec or less; in a ridge and swale configuration, with ridges having slopes of 4 percent and synthetic liner in the swales;
- * Capping with bituminous (asphalt) caps the 6-acre parcel of Landfill #1 where the Village of Endicott has a permitted yard waste composting facility and the 8-acre Controlled Activity Area (CAA) of the Tri-Cities Airport regulated by the Federal Aviation Administration;
- * Performing an explosive gas investigation and installing a gas venting system, as necessary, based on the results of a landfill gas investigation. A passive system with one vent per acre is envisioned, but this will be further evaluated during the remedial design phase;
- * Collecting, treating, and disposing the leachate seep into the Susquehanna River or to a publicly owned treatment works. If installation of the cap reduces leachate generation to the extent that the seep no longer exists, this may not be warranted. The specific treatment and disposal option will be further evaluated during the remedial design phase, based on implementability;
- * Recommending that institutional controls be established in the form of deed restrictions on future uses of Landfill #1;
- * Fencing or other acceptable access restrictions to ensure protection of the Landfill #1 cap;
- * Performing long term operation and maintenance of the Landfill #1 cap, gas venting, and leachate systems to provide for inspections and repairs;
- * Performing long term air and water quality monitoring;
- * Evaluating Site conditions at least once every five years to determine if a modification to the selected remedy is necessary.

Remediation of ground water is expected to be achieved by continued operation and maintenance of the ground water collection and treatment remedial measures already selected for the Site, which are the air stripper at the ranney well, the existing purge well, and the supplemental purge well.

DECLARATION OF STATUTORY DETERMINATIONS

The selected remedy is protective of human health and the environment, complies with Federal and State requirements that are legally applicable or relevant and appropriate to the remedial action and is cost effective. The selected remedy utilizes permanent solutions and alternative treatment (or resource recovery) technologies to the maximum extent practicable. Due to the large size of Landfill #1 and the absence of hot spots representing major sources of contamination, Landfill #1 could not practicably be excavated and treated. Therefore, the selected remedy does not satisfy the statutory preference for treatment as a principal element of the remedy with respect to source control.

Because the selected remedy will result in hazardous substances remaining on-site above health-based levels, a review will be conducted within five years after commencement of the remedial action to ensure that the remedy continues to provide adequate protection of human health and the environment.

Constantine Sidamon-Eristoff

Regional Administrator

7 30 1V

RECORD OF DECISION DECISION SUMMARY

Endicott Well Field Village of Endicott, Broome County, New York

United States Environmental Protection Agency Region II New York, New York

TABLE OF CONTENTS

PAGE

SITE HISTORY AND ENFORCEMENT ACTIVITIES	
HIGHLIGHTS OF COMMUNITY PARTICIPATION	
SCOPE AND ROLE OF OPERABLE UNIT	
SUMMARY OF SITE CHARACTERISTICS	
SUMMARY OF SITE RISKS	
DESCRIPTION OF REMEDIAL ALTERNATIVES	
SUMMARY OF COMPARATIVE ANALYSIS OF ALTERNATIVES	
SELECTED REMEDY	
STATUTORY DETERMINATIONS	
DOCUMENTATION OF SIGNIFICANT CHANGES	
<u>ATTACHMENTS</u>	
APPENDIX I. FIGURES	

- - Figure 1: Site Location Figure 2: Endicott Landfill
 - Figure 3: Wetlands (east bank of Nanticoke Creek and north bank of Susquehanna River east of Nanticoke Creek
 - Figure 4: Wetlands (west bank of Nanticoke and north bank of Susquehanna River west of Nanticoke Creek)

APPENDIX II. TABLES

Table [a]: Indicator Contaminants of Potential Concern

Table [b]: Summary of Chemical Compounds (Detects and Undetects)

Table [c]: Exposure Pathway Analysis

Table [d]: Toxicity Data for Noncarcinogenic and Potential Carcinogenic Effects Dose Response Evaluation

Table [e]: Risk Levels and HI Values, Summary Across Exposure Pathways, Present/Future Use, Resident Adults

Table [f]: Risk Levels and HI Values, Summary Across Exposure Pathways, Present/Future Use, Resident Children

Table [g]: Risk Levels and HI Values, Future Use, Construction Workers

Table [h]: Sources of Uncertainty in Endicott Risk Assessment

Table [i]: Maximum Contaminant Levels (Federal and more stringent State standards)

APPENDIX III. INDEX TO ADMINISTRATIVE RECORD FILE

APPENDIX IV. STATE LETTER OF CONCURRENCE

APPENDIX V. RESPONSIVENESS SUMMARY

SITE NAME, LOCATION AND DESCRIPTION

The Endicott Well Field Superfund Site (the "Site") is located on South Grippen Street at the western end of the Village of Endicott, New York (Figure 1). The Site consists of the ranney well, which is a municipal drinking water well, and its zone of influence on area ground water. The boundaries of this area have been generally delineated by Main Street to the north, the eastern boundary of the En-Joie Golf Course to the east, the Susquehanna River to the south, and the Tri-Cities Airport and Airport Road to the west.

The Site is composed primarily of flat to gently rolling open land associated with the En-Joie Golf Course, facilities of the Village of Endicott Sewage Treatment Plant (STP), and the Endicott Landfill #1). A portion of Landfill #1 adjacent to the Tri-Cities Airport extends into an approximately 8-acre area designated by the Federal Aviation Administration (FAA) as the Controlled Activity Area (CAA), which includes the Runway Object Free Area (ROFA) (Figure 2). A 6-acre parcel on Landfill #1 near the entrance to the STP is currently permitted for use by the Village of Endicott to compost yard waste (Figure 2); approximately 2 acres of the composting area are paved. There are two inactive landfills (Landfill #2 and Landfill #3) and a few industrial tracts north of the Site. Private homes are not located within the Site.

The Susquehanna River flows to the west along the southern boundary of the Site. The southerly flowing Nanticoke Creek is a tributary to the Susquehanna River and generally bisects the Site. Dead Creek, an intermittent stream, originally flowed across Landfill #1 into the Susquehanna River. In the early 1970's, the creek was rerouted by the Village of Endicott to flow into Nanticoke Creek and the abandoned portion of the creek bed was filled in. Several man-made ponds on the En-Joie Golf Course are kept filled by water treated and discharged from the existing purge well, golf course irrigation, and precipitation. Excess water is ultimately discharged into Nanticoke Creek under a New York State Pollutant Discharge Elimination System (SPDES) permit, which requires monthly sampling and analysis of water from the existing purge well, the pond discharge, and three monitoring wells.

SITE HISTORY AND ENFORCEMENT ACTIVITIES

The ranney well provides approximately 47 percent of the total water supply to the Village of Endicott Municipal system. It operated without major problems until May 1981, when the EPA detected vinyl chloride and trace amounts of other volatile organic compounds (VOCs) in the well discharge. Subsequent sampling by the EPA and the New York State Department of Health confirmed EPA's initial findings and, as a result, four of the lateral supply lines to the well were closed, and diffused air aeration equipment was installed to reduce the levels of VOCs.

Additional studies were undertaken by the New York State Department of Environmental Conservation (NYSDEC) Division of Water beginning in April 1983. The first study included the installation of nine monitoring wells and the sampling and analysis of ground water from selected wells. A pump test was also performed in September 1983 by turning off the ranney well for a period of 24 hours and measuring recovery rates in nearby monitoring

wells. The results of this study indicated that the source of contamination was located either west or northwest of the ranney well.

Based on the results of these investigations, in July 1984, a purge well designed to pump approximately 600 gallons per minute and three additional monitoring wells were installed on the En-Joie Golf Course to intercept and monitor ground water contamination before it reached the ranney well. Water from this purge well is pumped to the golf course pond system where it is aerated before it is ultimately discharged to Nanticoke Creek.

The Site was proposed on the EPA's National Priorities List (NPL) on October 15, 1984 and final NPL listing occurred on June 10, 1986. Since that time, the Site has been divided into three smaller units called operable units (OUs). In July 1987, contractors for NYSDEC, under a cooperative agreement with EPA, completed an RI/FS at the Site that investigated the nature and extent of contamination at the ranney well (OU #1). On September 25, 1987, EPA issued a Record of Decision (ROD) that selected air stripping at the ranney well and the continued use of the existing purge well system to ensure that the community is prevented from drinking contaminated ground water, which is the immediate risk that was posed by the Site. Construction of the air stripping tower at the ranney well was completed by the Village of Endicott in the Fall of 1991. This remedial action is being implemented pursuant to a Consent Decree entered into by the EPA, the Town of Union, and the Village of Endicott, which was entered in U.S. District Court for the Northern District of New York on January 10, 1989.

The RI/FS concluded that the information obtained then was inadequate to confirm the source(s) of the VOCs in the ground water at the ranney well. Therefore, in the 1987 ROD, EPA also required that a supplemental RI/FS be initiated to further investigate the nature and extent of contamination in suspected source areas and to evaluate possible source control measures. The supplemental RI/FS work, which is the subject of this ROD, constitutes OU #2.

On September 19, 1988, EPA, International Business Machines (IBM), the Village of Endicott, and the Town of Union entered into an Administrative Order on Consent for implementation of the supplemental RI/FS. The RI/FS activities were undertaken in two phases and were performed by IBM through its consultants, Lozier/Groundwater Associates, Inc.

The RI Report for the Phase I study was approved by EPA in November 1990. The results of Phase I indicated that additional remedial measures were needed to control the plume of contaminated ground water emanating from Landfill #1. Therefore, EPA established OU #3 and in March 1991 issued a ROD, for interim action, selecting extraction through a supplemental purge well and treatment of contaminated ground water. The OU #3 work is being performed by the Village of Endicott, through its consultant Malcolm Pirnie, Inc., pursuant to a Consent Decree entered into by the EPA, Endicott Johnson Corp., the Village of Endicott, the Town of Union, and George Industries, Inc. This Consent Decree was entered in U.S. District Court for the Northern District of New York on January 7, 1992. EPA approved the 35% design for the supplemental purge well in July 1992 and expects to approve the final design by March 1993.

HIGHLIGHTS OF COMMUNITY PARTICIPATION

The RI report, FS report, and the Proposed Plan for OU #2 for the Site were released to the public for comment on August 28, 1992. These documents were made available to the public in the administrative record file at the EPA Records Center in Region II, New York and the local information repository at the Village of Endicott Clerk's Office, Municipal Building, 1009 East Main Street, Endicott, New York 13760. The notice of availability for the above-referenced documents was published in the <u>Binghampton Press</u> on August 28, 1992. The public comment period on these documents was held from August 28, 1992 to September 26, 1992.

On September 15, 1992, EPA conducted a public meeting for OU #2 at the Village of Endicott Municipal Building to inform local officials and interested citizens about the Superfund process, to review current and planned remedial activities at the Site, and to respond to any questions from area residents and other attendees.

Responses to the comments received at the public meeting and in writing during the public comment period are included in the Responsiveness Summary, which is included as Appendix V of this ROD.

SCOPE AND ROLE OF OPERABLE UNIT

EPA has separated the response actions at the Site into three distinct units called operable units (OUs). This ROD is for OU #2, the third and final operable unit planned for the site. OU #1 provided the community with a safe and reliable supply of drinking water by requiring installation of an air stripper at the ranney well to prevent ingestion of contaminated ground water. OU #1 also addressed control and treatment of contaminated ground water through continued use of a purge well. OU #3 addressed remediation of the contaminated ground water by requiring extraction and treatment through a supplemental purge well. This OU #2 ROD addresses the source of the contaminated ground water, which is the Landfill #1.

The lead agency for this operable unit is the U.S. Environmental Protection Agency. The support agency is the New York State Department of Environmental Conservation.

REMEDIAL ACTION OBJECTIVES

Remedial action objectives are specific goals to protect human health and the environment; they specify the contaminant(s) of concern, the exposure route(s), receptor(s), and acceptable contaminant level(s) for each exposure route. These objectives are based on available information and standards such as applicable, or relevant and appropriate requirements (ARARs) and risk-based levels established in the risk assessment.

The following remedial action objectives were established:

- * Ground water control to prevent migration of the VOC-contaminated plume;
- * Remediation of contaminated ground water emanating from Landfill #1 to drinkable levels;
- * Landfill waste containment and control of associated landfill gas;
- * Control and treatment of the leachate seep to levels acceptable for proper disposal.

SUMMARY OF SITE CHARACTERISTICS

The Remedial Investigation was conducted in two phases. EPA issued the ROD for OU #3 upon completion of Phase I. The field activities for Phase II were conducted following approval of the final Phase II scope of work in May 1991 and included the drilling of soil borings, the installation of 12 monitoring wells and five (5) monitoring points, test pitting, drum sampling, and leachate and ground water sampling. This ROD is based upon data presented in the Remedial Investigation Report, which incorporated both Phase I and Phase II data.

The results of the Remedial Investigation indicated the following:

A. Geology and Hydrology

The Site is located in the Susquehanna River Valley. Valley walls of bedrock have been filled up with unconsolidated sediments. The bedrock consists primarily of Upper Devonian interbedded shales and siltstones. A bedrock knob, known locally as Round Top Hill, crops out to the east of the Site. Ground water flow within the bedrock is restricted by the fine-grained nature of the siltstones and shales; fractures and joints would be expected to yield a limited quantity of poor quality ground water. The bedrock is overlain by more than 100 feet of unconsolidated glacial and alluvial deposits. The glacial sediments consist of a dense heterogeneous till and fine-grained lacustrine sediments overlain by coarse-grained outwash and ice contact deposits. Recent alluvial sediments at the Site consist of interbedded sands, silts, and clays deposited by the Susquehanna River, Nanticoke Creek, and Dead Creek.

The base of the aquifer has been defined as the top of the till and, where present, the lacustrine sediments. The ice contact and outwash deposits make up the aquifer, which serves as an abundant source of ground water. At the Site, the thickness of the aquifer ranges from less than 40 to more than 140 feet. Under non-pumping conditions the ground water flow in the aquifer is from the northeast to the southwest. However, ground water flow at the Site has been locally reversed to a southeastern direction under the combined influence of the ranney well and existing purge well, which have pumping rates of 3,700 gpm and 600 gpm, respectively.

B. Chemical Characteristics

- * A ground water plume containing VOCs is migrating from Landfill #1 eastward under the combined pumping influence of the ranney well and existing purge well. The primary VOCs identified are chloroethane (up to 2.9 parts per million [ppm]), 1,2-dichloroethene (up to 2.7 ppm), and vinyl chloride (up to 130 parts per billion [ppb]).
- * A leachate seep at location LF-1-5 emanates from Landfill #1 in the vicinity of the former Dead Creek channel, on the southeastern edge of the landfill. Flow ranges from approximately 5 gallons per minute to no flow during dry periods. The leachate seep is contaminated primarily with VOCs, mostly chloroethane and chlorobenzene, up to almost 1 ppm.
- * Air/landfill gas sampling results indicated the presence of VOCs, primarily benzene, toluene, and xylene, in the soil gas at several locations across Landfill #1. Methane is passively dissipating from the entire Landfill #1.
- * Subsurface soil samples collected from soil borings, test pits, and monitoring well borings showed that VOCs are present in the wastes of Landfill #1. The VOC contamination occurs at various depths and locations within the landfill and no specific areas of contamination ("hot spots") were identified.
- * Surface water sampling of the Susquehanna River, Nanticoke Creek and Dead Creek did not detect any contamination. VOCs were detected in samples taken from the golf course pond, which receives discharge from the existing purge well. The discharge from the pond to Nanticoke Creek is currently permitted by NYSDEC.
- * Sediment samples were collected concurrently with the surface water samples, at the same locations. No significant VOC concentrations were detected at the sediment sampling locations.

C. Sensitive Environments

Wetlands were identified at the site on the floodplains along the east and west banks of Nanticoke Creek and on the north bank of the Susquehanna River (Figures 3 and 4). A small area (0.6 acres) of man-made wetlands was identified on Landfill #1 just south of the STP. The majority of Landfill #1 is within the 100-year floodplain (\pm 829 feet elevation) and in the floodway of the Susquehanna River.

An endangered species evaluation was completed to assess the potential existence of endangered species or their critical habitats at the Site. No State or Federal-designated endangered species of plants or animals are known to exist at the Site.

SUMMARY OF SITE RISKS

EPA conducted a baseline risk assessment to evaluate the potential risks to human health and the environment associated with the Endicott Well Field Site in its current state. The baseline risk assessment began with selecting contaminants of concern that would be representative of Site risks. Contaminants of concern for human health receptors included VOCs, semi-volatile organic compounds, and metals in various media, and are listed in Table [a]. Information of concentration levels detected for each contaminant is listed in Table [b]. Several of the contaminants, such as vinyl chloride, carcinogenic polycyclic aromatic hydrocarbons (PAHs) and arsenic are known to cause cancer in laboratory animals and are suspected or known to be human carcinogens.

The baseline risk assessment evaluated the health effects that could result from exposure to contamination as a result of inhalation, ingestion, or dermal contact. Current use and future use, based on proposed construction at the Site, were considered. The reasonable maximum exposure was evaluated. The baseline risk assessment evaluated a total of 20 pathways, which are listed in Table [c].

Under current EPA guidelines, the likelihood of carcinogenic (cancer-causing) and noncarcinogenic effects due to exposure to site chemicals are considered separately. It was assumed that the toxic effects of the site-related chemicals would be additive. Thus, carcinogenic and noncarcinogenic risks associated with exposures to individual compounds of concern were summed to indicate the potential risks associated with mixtures of potential carcinogens and noncarcinogens, respectively.

For known or suspected carcinogens, EPA considers excess upper-bound individual lifetime cancer risks of between 10⁻⁴ to 10⁻⁶ to be acceptable. This range indicates that an individual has approximately a one in ten thousand to one in a million chance of developing cancer as a result of site-related exposure to a carcinogen over a 70-year period under specific exposure conditions at the Site.

The results of the baseline risk assessment are contained in the <u>Final Risk Assessment Report</u>. RI/FS Oversight, Endicott Well Field Site, Endicott, New York, dated June 1992, which was prepared by Ebasco Services, Inc. under contract to EPA. These results indicate that ingestion of contaminated ground water at the Site is the primary pathway of concern. Excess carcinogenic risks of 1 x 10⁻³ for resident adults and 4 x 10⁻⁴ for children were calculated for the present and future use scenario. These risk numbers mean that 1 additional adult in 1000 and 4 additional children in 10,000 who drink ground water from the Site would be at risk of developing cancer if the Site is not remediated. The carcinogenic risk to adult residents from ingestion of contaminated ground water is greater than EPA's acceptable risk range. The excess risk at the Site is primarily due to vinyl chloride, carcinogenic PAHs, total PCBs, and the metals arsenic and beryllium. Of these compounds, the presence of PCBs was not confirmed by subsequent ground water sampling, the carcinogenic PAHs were detected in subsurface soils and sediment but not in ground water samples, and beryllium was detected in unfiltered but not in filtered ground water samples. The risk calculations used various conservative assumptions about the

likelihood of a person being exposed to contaminants, such as drinking untreated ground water from the Site. A complete listing of excess cancer risk for each exposure pathway considered is presented in Tables [e], [f], and [g].

Potential carcinogenic risks were evaluated using the cancer slope factors developed by EPA for the contaminants of concern. Cancer slope factors (SFs) have been developed by EPA's Carcinogenic Risk Assessment Verification Endeavor for estimating excess lifetime cancer risks associated with exposure to potentially carcinogenic chemicals. SFs, which are expressed in units of (mg/kg-day)⁻¹, are multiplied by the estimated intake of a potential carcinogen, in mg/kg-day, to generate an upper-bound estimate of the excess lifetime cancer risk associated with exposure to the compound at that intake level. The term "upper bound" reflects the conservative estimate of the risks calculated from the SF. Use of this approach makes the underestimation of the risk highly unlikely. The SFs for the compounds of concern are presented in Table [d].

Noncarcinogenic risks were assessed using a hazard index (HI) approach. EPA has developed reference doses (RfDs), expressed in units of mg/kg-day, which are estimates of daily exposure levels for humans (including sensitive individuals) that are thought to be safe over a lifetime. Estimated intakes of chemicals from environmental media (e.g., the amount of a chemical ingested from contaminated drinking water) are compared to the RfD to derive the hazard quotient for the contaminant in the particular medium. The HI is obtained by adding the hazard quotients for all compounds across all media that could impact a particular receptor population.

An HI greater than 1 indicates the potential for noncarcinogenic health effects to occur as a result of site-related exposures. The HI provides a useful means of assessing the potential significance of multiple contaminant exposures within a single medium or across media. The RfDs for the compounds of concern at the Endicott Well Field Site are presented in Table [d]. A summary of the noncarcinogenic risks associated with these chemicals across various exposure pathways is found in Table [e] for resident adults, Table [f] for resident children, and Table [g] for construction workers.

The HI for noncarcinogenic effects from ingestion of ground water (reasonable maximum exposure) is 14 for adult residents, 28 for children, and 5 for future construction workers (see Tables [e], [f], and [g], respectively). Therefore, noncarcinogenic effects may occur from the exposure routes evaluated in the Risk Assessment. The noncarcinogenic risk was attributable to several compounds, including the metals manganese, vanadium, and antimony. Of these metals, only manganese was detected in filtered samples and its water quality standard is based on aesthetic rather than health-based considerations.

Ecological Risk Assessment

Ecological assessments of the adverse effects of contaminants on ecosystems are conducted using exposure and toxicity data to estimate the potential impact on the ecosystem. Surface water and sediment samples collected from the Susquehanna River,

Nanticoke Creek, and Dead Creek showed no significant concentrations of VOCs. Therefore, it appears that the Site is not adversely impacting ecological receptors.

Uncertainties

The quantitative assessment of health effects at hazardous waste sites is inherently uncertain. This uncertainty arises from the need to predict potential future health impacts in the absence of observed health effects and on the basis of limited data concerning contaminant levels, transport mechanisms, receptor behavior, and the toxicologic behavior of the chemicals present. The major sources of uncertainty in the Endicott Well Field risk assessment are listed in Table [h]. However, it is highly unlikely that risks related to the Site would be underestimated, because EPA uses conservative assumptions in its risk assessments.

Based on the results of the risk assessment, EPA has determined that actual or threatened releases of hazardous substances from the Endicott Well Field Site, if not addressed by the selected remedy or one of the other active measures considered, may present a current or potential threat to public health, welfare or the environment.

DESCRIPTION OF REMEDIAL ALTERNATIVES

CERCLA requires that each selected site remedy be protective of human health and the environment, be cost effective, comply with other statutory laws, and utilize permanent solutions, alternative treatment technologies and resource recovery alternatives to the maximum extent practicable. In addition, the statute includes a preference for the use of treatment as a principal element for the reduction of toxicity, mobility, or volume of the hazardous substances.

This ROD evaluates in detail five (5) remedial alternatives for addressing the contamination associated with the Endicott Well Field Site. The construction time provided for each alternative is the time that would be required to construct or implement the remedy and does not include the time required to design the remedy, negotiate with the potentially responsible parties, or procure contracts for design and construction.

These alternatives are:

ALTERNATIVE 1: NO ACTION

CERCLA requires that the "no-action" alternative be considered as a baseline for comparison with other alternatives. Under this alternative, no action would be taken to contain wastes, reduce infiltration into Landfill #1, eliminate areas of exposed waste, or control and treat leachate discharging from the landfill. Because this alternative would result in contaminants remaining on-site, CERCLA requires that the Site conditions be reviewed at least once every five years.

Capital Cost: \$ 0
O & M Cost: \$ 0/yr
Present Worth Cost: \$ 0
Construction Time: None

ALTERNATIVE 2: INSTITUTIONAL CONTROLS

This alternative would consist of deed and access restrictions. The deed restrictions would be designed to prevent direct contact with the subsurface waste material in Landfill #1 by limiting future Site use. Access would be restricted by the construction of a six-foot high chain link fence, approximately 8,000 feet long, around most of Landfill #1. A six-foot frangible (break-away) wooden fence would be constructed around the Tri-Cities Airport ROFA, in coordination with the FAA and airport management. Access to the landfill by authorized personnel would be through one or more 20-foot wide lockable gates. No remedial action would be taken with regard to the leachate seep. Five-year site reviews would again be required.

Capital Cost: \$ 214,700
O & M Cost: \$ 7,800/yr
Present Worth Cost: \$ 390,900
Construction Time: 6 months

ALTERNATIVE 3: NATIVE SOIL CAP

This alternative would include the deed restrictions and fencing described in Alternative 2 above with the addition of the following remedial measures:

- Filling of depressions with an estimated 50,000 cubic yards (CY) of suitable off-site clean fill;
- Landfill gas migration monitoring;
- * Addition of soil to cover exposed areas; and
- * One of three leachate options:
 - Option B Collection and treatment by air stripper and SPDES-permitted discharge to the Susquehanna River
 - Option C Collection and trucking to publicly owned treatment works (POTW) for treatment and disposal, or
 - Option D Collection and piping to POTW for treatment and disposal.

This alternative would require the backfilling of approximately 0.6 acre of the man-made wetlands area within the limits of landfill waste. The native soil cap would not extend into the CAA of the Tri-Cities Airport. Leachate Options C and D may require treatment prior to acceptance by the POTW. Five-year site reviews and deed and access restrictions would also be included. Fencing is included in this alternative to prevent unauthorized access to the landfill to protect the cap.

Capital Cost: 3/B \$ 2,968,600

3/C 2,845,800 3/D 2,882,700 O & M Cost: 3/B \$ 132,500/yr 3/C 139,300 3/D 121,600 Present Worth Cost: 3/B \$ 5,080,900

• 3/C 5,062,500

3/D 4,875,700

Construction Time: 1 year

ALTERNATIVE 4: LOW PERMEABILITY BARRIER CAP CONSISTENT WITH 6NYCRR PART 360

For this alternative, a low permeability barrier cap and gas venting system would be constructed over Landfill #1 consistent with NYSDEC regulations for municipal landfills (6NYCRR Part 360 Section 360-2.15). The cap would cover the limits of the landfill waste, including the compost area but not the CAA. The Site would be regraded to a 4 percent slope by the addition of suitable off-site clean fill. This would elevate the middle of Landfill #1 to about 25 feet higher than the adjacent Tri-Cities Airport runway. Approximately 0.6 acre of man-made wetlands would be backfilled. Deed restrictions, fencing, landfill gas venting, five year site reviews, and one of the three leachate seep collection, treatment, and disposal options described in Alternative 3 would be included. The cap system would consist of the following:

- * 6 inches of top soil (estimated 55,000 CY)
- * 24 inches of protective barrier fill (estimated 219,000 CY)
- * 40-mil thick geosynthetic membrane liner
- * 2 layers of filter fabric
- * a gas venting layer (1 foot of gravel with a minimum permeability of 1 x 10⁻³ cm/sec) and gas venting risers (minimum one vent per acre)
- * soil fill of varying thickness to establish a 4 percent slope (estimated 970,000 CY)

Capital Cost: 4/B \$ 39,384,600 4/C 39,261,800 4/D 39,298,700

O & M Cost: 4/B \$ 381,300/yr 4/C 388,100 4/D 370,400

Present Worth Cost: 4/B \$ 45,202,600

4/C 45,184,200 4/D 44.997,400

Construction Time: 1 1/2 years

ALTERNATIVE 5A: LOW PERMEABILITY BARRIER CAP WITH 6NYCRR PART 360 VARIANCE

This alternative would consist of a low permeability cap on Landfill #1, placed over a series of ridges and swales in a terraced or "washboard" design. The ridges would have a 4 percent slope to promote drainage. The Tri-Cities Airport CAA and the compost area would be covered by bituminous (asphalt) caps, having 2 percent and 1 percent slopes, respectively. Deed restrictions, fencing, landfill gas venting, five year site reviews, and one of the three leachate seep collection, treatment, and disposal options described in Alternative 3 would be included. The cap would consist of the following components:

- * 6 inches topsoil
- * 12 inches protective barrier fill with a permeability of 10⁻⁵ cm/sec or lower
- * synthetic liner in swales
- * passive gas venting system (gas venting layer and a minimum of one vent per acre)

Capital Cost: 5A/B \$ 12,833,100 5A/C 12,710,300

5A/D 12,747,200

O & M Cost: 5A/B \$ 258,900/yr

265,700 5A/C 5A/D 248,000

Present Worth Cost: 5A/B \$ 16,889,400

5A/C 16,871,000 5A/D 16,684,200

Construction Time: 1 1/2 years

SUMMARY OF COMPARATIVE ANALYSIS OF ALTERNATIVES

During the detailed evaluation of remedial alternatives, each alternative was assessed utilizing nine evaluation criteria as set forth in the NCP and OSWER Directive 9355.3-01. These criteria were developed to address the requirements of Section 121 of CERCLA to ensure all important factors are considered in remedy selection decisions.

The following "threshold" criteria are the most important, and must be satisfied by any alternative in order to be eligible for selection:

- Overall protection of human health and the environment addresses whether or not a remedy provides adequate protection and describes how risks posed through each exposure pathway (based on a reasonable maximum exposure scenario) are eliminated, reduced, or controlled through treatment, engineering controls, or institutional controls.
- 2. Compliance with ARARs addresses whether or not a remedy would meet all of the applicable, or relevant and appropriate requirements of Federal and State environmental statutes and requirements or provide grounds for invoking a waiver.

The following "primary balancing" criteria are used to make comparisons and to identify the major trade-offs between alternatives:

- 3. Long-term effectiveness and permanence refers to the ability of a remedy to maintain reliable protection of human health and the environment over time, once cleanup goals have been met. It also addresses the magnitude and effectiveness of the measures that may be required to manage the risk posed by treatment residuals and/or untreated wastes.
- 4. Reduction of toxicity, mobility, or volume through treatment is the anticipated performance of a remedial technology, with respect to these parameters, that a remedy may employ.
- 5. Short-term effectiveness addresses the period of time needed to achieve protection and any adverse impacts on human health and the environment that may be posed during the construction and implementation periods until cleanup goals are achieved.
- 6. *Implementability* is the technical and administrative feasibility of a remedy, including the availability of materials and services needed.
- 7. Cost includes estimated capital and operation and maintenance costs, and the present-worth costs.

The following "modifying" criteria are considered fully after the formal public comment period on the Proposed Plan is complete:

- 8. State acceptance indicates whether, based on its review of the RI/FS and the Proposed Plan, the State supports, opposes, and/or has identified any reservations with the preferred alternative.
- 9. Community acceptance refers to the public's general response to the alternatives described in the Proposed Plan and the RI/FS reports. Factors of community

acceptance to be discussed include support, reservation, and opposition by the community.

Following is a comparative analysis of the remedial alternatives based upon the evaluation criteria noted above.

Overall Protection of Human Health and the Environment

Alternatives 3, 4, and 5A would provide permanent overall protection of human health and the environment by containing waste with a landfill cap; controlling landfill gas through monitoring or venting, as appropriate; and controlling and treating the leachate seep. Alternatives 4 and 5A, which include a low permeability barrier cap, are more effective in achieving these remedial objectives.

Alternative 1 (No Action) and Alternative 2 (Institutional Controls) are not protective of human health and the environment because they do not minimize infiltration into the landfill, thereby preventing further leaching of contaminants into the aquifer. In addition, Alternatives 1 and 2 do not provide control or treatment of the leachate seep. Therefore, Alternatives 1 and 2 were eliminated from consideration and will not be discussed further.

o <u>Compliance with ARARs</u>

Chemical-specific ARARs identified for ground water include the more stringent of Federal and State maximum contaminant levels (MCLs) (Table [i]). Examples of these levels are 5 ppb for chloroethane, 5 ppb for 1,2-dichloroethene, 2 ppb for vinyl chloride, and 50 ppb for arsenic. Chemical-specific ARARs for ground water are expected to be met by continued operation and maintenance of the ground water collection and treatment remedial measures already selected for the Site, which are the air stripper at the ranney well, the existing purge well, and the supplemental purge well.

Action-specific ARARs include 6NYCRR Part 360 requirements for closure and post-closure of municipal landfills and the NYSDEC State Pollutant Discharge Elimination System (SPDES) program. The Part 360 regulations require that the landfill cap promote runoff, minimize infiltration, and maintain vegetative growth for slope stability. Typically, this is accomplished through a final cover system consisting of a 12-inch thick gas venting layer overlain by an 18-inch thick low permeability barrier layer or geosynthetic membrane layer placed on a slope of 4 percent, a 24-inch thick barrier protection layer, and a 6-inch thick topsoil layer.

Alternative 4 is consistent with the cap design and slope requirements as specified in 6NYCRR Part 360. Alternative 5A complies with Part 360 by invoking the variance provisions set forth in 6NYCRR Part 360-1.7(c), based on site-specific conditions (location of the landfill within the 100-year floodplain and floodway of the Susquehanna River and adjacent to the Tri-Cities Airport) and economic considerations. Alternative 5A contains a variance to Section 360-2.15(b): Landfill closure and post-closure criteria, which specifies

that the final cover system must meet the requirements of Section 360-2.13(p): Gas venting layer, Section 360-2.13(q): Low permeability barrier soil cover or Section 360-2.13(r): Geomembrane cover, and Section 360-2.13(s): Topsoil. Specifically, Alternative 5A invokes a variance to Sections 360-2.13(q)(2)(i) and (iii) for the majority of the landfill and a variance to Sections 360-2.13(p),(q), and (s) for the CAA and yard waste composting portions of the landfill.

Section 360-2.15(a)(1)(i), regarding a hydrogeologic investigation, and Section 360-2.15(c), regarding a surface leachate investigation, have already been complied with as part of the OU #2 RI/FS. Alternative 3 would not promote runoff or minimize infiltration sufficiently to meet the requirements of 6NYCRR Part 360.

The options for leachate collection, treatment and disposal considered under Alternatives 3, 4, and 5A would be designed to ensure compliance with their associated ARARs, including SPDES limits for discharge to surface water and air emission standards for an air stripper.

Location-specific ARARs include the Federal Protection of Wetlands Executive Order (E.O. 11990), the Federal Flood Plains Management and Executive Order (E.O. 11988), the New York State Floodplain Management Criteria for State Projects (6NYCRR Part 502 Section 16), and the Federal Aviation Regulations 49 C.F.R. Part 77: Objects Affecting Navigable Airspace. The 6NYCRR Part 502 regulations require than an hydraulic evaluation be performed during remedial design to assess the modification of the Susquehanna River floodway caused by the landfill cap. The FAA regulates construction within the CAA and requires notice of proposed construction having a slope greater than 1 percent within 20,000 feet of an airport that has a runway longer than 3,200 feet, such as the Tri-Cities Airport. Alternatives 3, 4 and 5A would result in the backfilling of approximately 1/2 acre of man-made wetlands and modification of the Susquehanna River floodway and the navigable airspace of the Tri-Cities Airport. Compliance with these ARARs is expected to be achievable for Alternatives 3, 4, and 5A.

Long-Term Effectiveness and Permanence

A landfill cap is considered a reliable remedial measure that, when properly designed and installed, provides a high level of protection. Of the three alternatives considered in detail, Alternative 3 would be the least reliable in protecting human health and the environment, because it allows precipitation to infiltrate through the landfill. Alternative 5A would be much more reliable, because it utilizes a low permeability barrier layer to restrict infiltration. Alternative 4 is expected to be slightly more effective in the long-term than Alternative 5A, because it meets the most stringent standards for a low permeability cap.

Post-closure operation and maintenance requirements would ensure the continued effectiveness of the landfill cap, landfill gas control system, and any of the three leachate system options.

o <u>Reduction in Toxicity, Mobility, or Volume</u>

None of the alternatives proposed reduces the toxicity or volume of landfill waste. Compared to Alternative 3, Alternatives 4 and 5A provide greater reduction in mobility and volume of contaminants by restricting infiltration through a low permeability landfill cap, which would reduce the further leaching of contaminants to ground water (leachate would still be generated when the Susquehanna River rises during flooding). Alternative 3 would be designed to allow, rather than restrict, the mobility of contaminants by allowing precipitation to infiltrate through the landfill and flush contaminants into the ground water, which would then be intercepted by the ranney well and the purge wells.

Options B, C, and D for leachate seep collection, treatment, and discharge considered for Alternatives 3, 4, and 5A would all effectively reduce the toxicity, mobility, and volume of contaminants in the leachate seep.

o <u>Short-Term Effectiveness</u>

There are limited short-term risks associated with Alternatives 3, 4, and 5A. These alternatives include caps, which would involve clearing, grubbing, and regrading of Landfill #1. Increase in traffic flow along local roads would be the greatest for Alternative 4, because it requires transportation of a total of 66,100 truckloads of soil, as compared to 11,710 truckloads for Alternative 5A and 3,700 for Alternative 3. This traffic would raise dust and increase noise levels locally. However, this activity is expected to be of short duration and proper construction techniques and operational procedures would minimize these impacts.

Short-term risks to workers could be increased to the extent that surficial wastes are encountered during landfill capping activities. However, these risks are not expected to be significant-based on EPA's risk assessment, which calculated an acceptable risk for dermal contact to landfill wastes. In addition, this risk would be minimized through the use of personal protection equipment. Once the surface soils are covered, these short-term impacts to the community, workers, and the environment would no longer be present.

Alternatives 4 and 5A are more effective in the short term than Alternative 3 because they limit leachate production, allowing more effective clean-up of ground water. Alternative 3 does not limit leachate production and is therefore not as protective of human health and the environment over the short term. Alternative 3 can be implemented the most quickly, in 1 year, while Alternatives 4 and 5A are estimated to each take 1 1/2 years.

o <u>Implementability</u>

Alternatives 3, 4, and 5A are implementable from an engineering standpoint and utilize commercially available products and accessible technology. Construction methods for capping are well established, although some technical problems may be encountered at particularly large construction projects such as this. The potential for design and construction problems would be reduced under Alternative 3, because the soil cap would

not require installation of a synthetic impermeable barrier. The synthetic liner specified in Alternatives 4 and 5A requires special handling during installation to ensure integrity. Alternatives 4 and 5A are technically and administratively feasible. Alternative 3 is technically, but is not administratively feasible because it is not an acceptable variance to the NYS landfill closure requirements.

The treatment of the leachate seep under Options B, C, or D is implementable. Discharge of the treated leachate to the Susquehanna River (Option B) would require a SPDES permit, which is considered feasible based on the existing permit for purge well discharge to Nanticoke Creek. Discharge of the leachate to a local POTW, either by trucking (Option C) or piping (Option D), would require revision of the existing SPDES permit or pretreatment of the leachate to remove inorganics prior to discharge. However, Options C and D may present implementability problems if the local POTW chooses not to accept the leachate.

Alternative 3 would be easier to implement than Alternatives 4 and 5A, because it would not require more than a 1 percent slope to the landfill cap. A slope greater than 1 percent would require coordination with the FAA and airport management, as well as formal notice of construction affecting navigable airspace.

o <u>Cost</u>

Alternative 3 has the lowest capital and O & M costs, resulting in a net present worth of \$4.9 to 5.1 million, because it uses the existing vegetative cover and minimal fill. Alternative 5A has an intermediate cost with a net present worth of \$16.7 to 16.9 million, because it utilizes a low permeability barrier cap placed over soils in a terraced or "washboard" design to attain the 4 percent slope. Alternative 4 has the highest cost, with a net present worth of \$45.1 to \$45.3 million, because it would use an estimated 970,000 CY to create a base for the langfill cap that has a 4 percent slope.

The costs to implement leachate Options B, C, and D are comparable; net present worth costs for each are all within \$1.4 to \$1.6 million.

o <u>State Acceptance</u>

The State of New York concurs with the selected remedy.

o <u>Community Acceptance</u>

[Describe the public's general response to the alternatives described in the Proposed Plan and the RI/FS reports. Factors of community acceptance to be discussed include support, reservation, and opposition by the community.]

SELECTED REMEDY

Based upon consideration of the requirements of CERCLA, the detailed analysis of the alternatives, and public comments, EPA has determined, in consultation with NYSDEC, that Alternative 5A is the appropriate remedy for the Site.

The major components of the selected remedy are as follows:

- * Capping the majority of the landfill surface with a low permeability barrier cap, with a variance of 6NYCRR Part 360 requirements, to allow for a minimum of 12 inches of protective barrier fill with a permeability of 10⁻⁵ cm/sec or less; in a ridge and swale configuration, with ridges having slopes of 4 percent and synthetic liner in the swales;
- * Capping with bituminous (asphalt) caps the 6-acre parcel of the landfill where the Village of Endicott has a permitted yard waste composting facility and the 8-acre Controlled Activity Area (CAA) of the Tri-Cities Airport regulated by the Federal Aviation Administration;
- * Performing an explosive gas investigation and installation of a gas venting system, as necessary, based on the results of the landfill gas investigation (a passive system with one vent per acre is envisioned, but this will be further evaluated during remedial design);
- * Collecting, treating, and disposing of the leachate seep by treating at an air stripper and discharging to the Susquehanna River or piping or trucking to a publicly owned treatment works for treatment and disposal (if installation of the cap reduces leachate generation to the extent that the seep no longer exists, this may not be warranted). The specific treatment and disposal option will be further evaluated in remedial design, based on implementibility;
- * Recommending that institutional controls in the form of deed restrictions on future uses of the landfill and fencing or other acceptable access restrictions be established to ensure protection of the landfill cap;
- * Performing long-term maintenance and operation of the landfill cap, gas venting, and leachate systems to provide for inspections and repairs;
- * Performing long-term air and water quality monitoring;
- * Evaluating Site conditions at least once every five years to determine if a modification to the selected alternative is necessary.

Remediation of ground water is expected to be achieved by continued operation and maintenance of the ground water collection and treatment remedial measures already selected for the Site, which are the air stripper at the ranney well, the purge well, and the supplemental purge well.

The selected alternative achieves the ARARs more quickly, or as quickly, and at less cost than the other options. Therefore, the selected alternative provides the best balance of trade-offs among alternatives with respect to the evaluating criteria. EPA and NYSDEC believe that the selected alternative will be protective of human health and the environment, will comply with ARARs, will be cost effective, and will utilize permanent solutions and alternative treatment technologies or resource recovery technologies to the maximum extent practicable.

The selected remedy is protective of human health and the environment, complies with Federal and State requirements that are legally applicable or relevant and appropriate to the remedial action, and is cost effective. The selected remedy utilizes permanent solutions and alternative treatment (or resource recovery) technologies to the maximum extent practicable. Due to the large size of the landfill and the absence of hot spots representing major sources of contamination, the landfill could not practicably be excavated and treated. Therefore, this remedy does not satisfy the statutory preference for treatment as a principal element of the remedy with respect to source control.

Because the selected remedy will result in hazardous substances remaining on-site above health-based levels, a review will be conducted within five years after commencement of remedial action to ensure that the remedy continues to provide adequate protection of human health and the environment.

STATUTORY DETERMINATIONS

Under its legal authorities, EPA's primary responsibility at Superfund sites is to undertake remedial actions that are protective of human health and the environment. In addition, Section 121 of CERCLA establishes several other statutory requirements and preferences. These specify that when complete, the selected remedial action for this Site must comply with applicable or relevant and appropriate environmental standards established under Federal and State environmental laws unless a statutory waiver is justified. The selected remedy also must be cost effective and utilize permanent solutions and alternative treatment technologies or resource-recovery technologies to the maximum extent practicable. Finally, the statute includes a preference for remedies that employ treatment that permanently and significantly reduce the volume, toxicity, or mobility of hazardous wastes, as available. The following sections discuss how the selected remedy meets these statutory requirements.

Protection of Human Health and the Environment

The selected remedy will provide permanent overall protection of human health and the environment by containing waste with a landfill cap, by controlling landfill gas through monitoring and venting, and by controlling and treating the leachate seep. By reducing leachate production, the remedy limits further contamination of the ground water and thereby builds upon the RODs for OU #1 and OU #3, which required use of the air stripper

at the ranney well, treatment at the existing purge well, and treatment at the supplemental purge well to remediate ground water.

Compliance with ARARs

The selected remedy will comply with all Federal and State ARARs. Chemical-specific ARARs identified for ground water include the more stringent of Federal and State maximum contaminant levels (MCLs), which are expected to be met by the continued operation and maintenance of the ground water collection and treatment remedial measures already selected for the Site, which are the air stripper at the ranney well, the purge well, and the supplemental purge well.

Action-specific ARARs include 6NYCRR Part 360 requirements for closure and post-closure of municipal landfills and the NYSDEC State Pollutant Discharge Elimination System (SPDES). The Part 360 regulations require that the landfill cap promote runoff, minimize infiltration, and maintain vegetative growth for slope stability. The selected remedy complies with Part 360 by invoking the variance provisions set forth in 6NYCRR Part 360-1.7(c), based on site-specific conditions and economic considerations. The selected remedy invokes a variance to Section 360-2.15(b): Landfill closure and post-closure criteria, which requires that the final cover system comply with Sections 360-2.13(p), (g) or (r), and (s). Specifically, the selected remedy invokes a variance to Sections 360-2.13(q)(2)(i) and (iii) for the majority of the landfill and a variance to Sections 360-2.13(p),(q), and (s) for the CAA and yard waste composting portions of the landfill. In addition, Section 360-2.15(a)(1)(i), regarding a hydrogeologic investigation, and Section 360-2.15(c), regarding a surface leachate investigation, have already been complied with as part of the OU #2 RI/FS. Leachate seep collection, treatment and disposal will be designed to ensure compliance with their associated ARARs, including SPDES for discharge to surface water and air emission standards for an air stripper.

Location-specific ARARs include the Federal Protection of Wetlands Executive Order (E.O. 11990), the Federal Flood Plains Management and Executive Order (E.O. 11988), the New York State Floodplain Management Criteria for State Projects (6NYCRR Part 502 Section 16), and the Federal Aviation Regulations 49 C.F.R. Part 77: Objects Affecting Navigable Airspace. The 6NYCRR Part 502 regulations require than an hydraulic evaluation be performed during remedial design to assess the modification of the Susquehanna River floodway caused by the landfill cap. The FAA regulates construction within the CAA and requires notice of proposed construction having a slope greater than 1 percent within 20,000 feet of the Tri-Cities Airport. The selected remedy will result in the backfilling of approximately 1/2 acre of man-made wetlands and modification of the Susquehanna River floodway and the navigable airspace of the Tri-Cities Airport. The selected remedy will achieve compliance with these ARARs.

Cost Effectiveness

The selected remedy affords overall effectiveness proportionate to its costs, because it uses a terraced or "washboard" design to attain a 4 percent slope to promote runoff, thereby reducing infiltration and leachate generation.

<u>Utilization of Permanent Solutions and Alternative Treatment Technologies to the Maximum Extent Practicable</u>

The selected remedy utilizes permanent solutions and treatment technologies to the maximum extent practicable. The remedy provides the best balance of tradeoffs among the alternatives with respect to the evaluation criteria.

Preference for Treatment as a Principal Element

The statutory preference for remedies that employ treatment as a principal element cannot be satisfied for the landfill itself, because treatment of the landfill material is not practicable. The size of the landfill and the fact that there are no identified hot spots that represent major sources of contamination preclude a remedy in which contaminants could be excavated and treated effectively. The remedies selected for the two previous OUs include treatment of contaminated ground water and, therefore, satisfy the preference for treatment. In addition, this selected remedy calls for treatment of the leachate seep at the Site and, hence, satisfies the preference for treatment for this portion of the remedy.

DOCUMENTATION OF SIGNIFICANT CHANGES


There are no significant changes from the preferred alternative presented in the Proposed Plan.


APPENDIX I


FIGURES

Figures

- Figure 1 Site Location
- Figure 2 Endicott Landfill
- Figure 3 Wetlands (east bank of Nanticoke Creek and north bank of Susquehanna River east of Nanticoke Creek
- Figure 4 Wetlands (west bank of Nanticoke and north bank of Susquehanna River west of Nanticoke Creek)

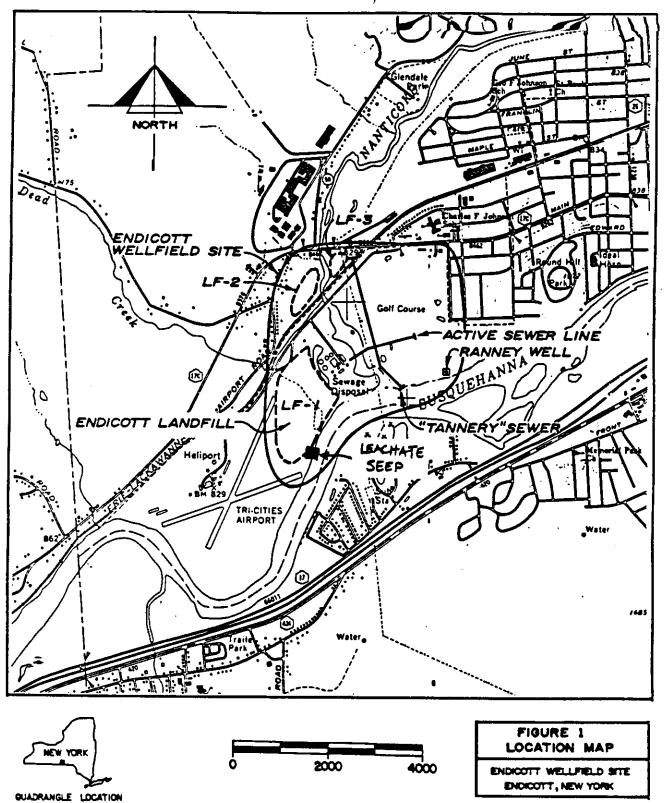

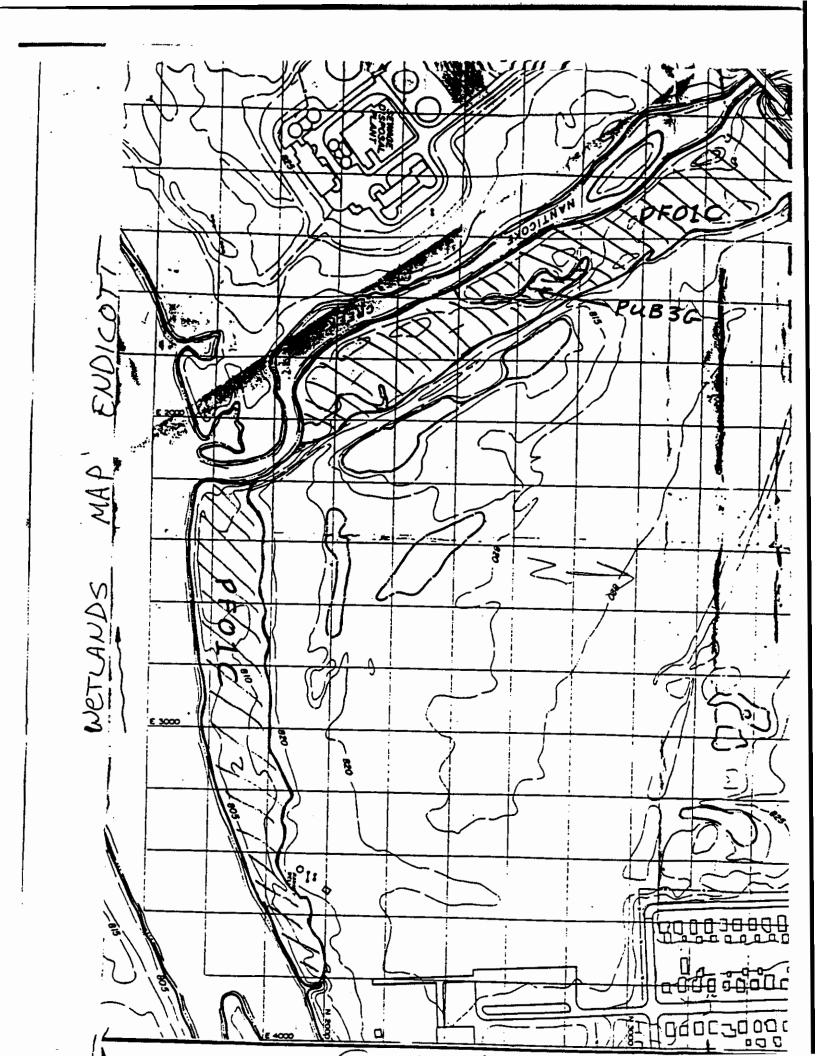

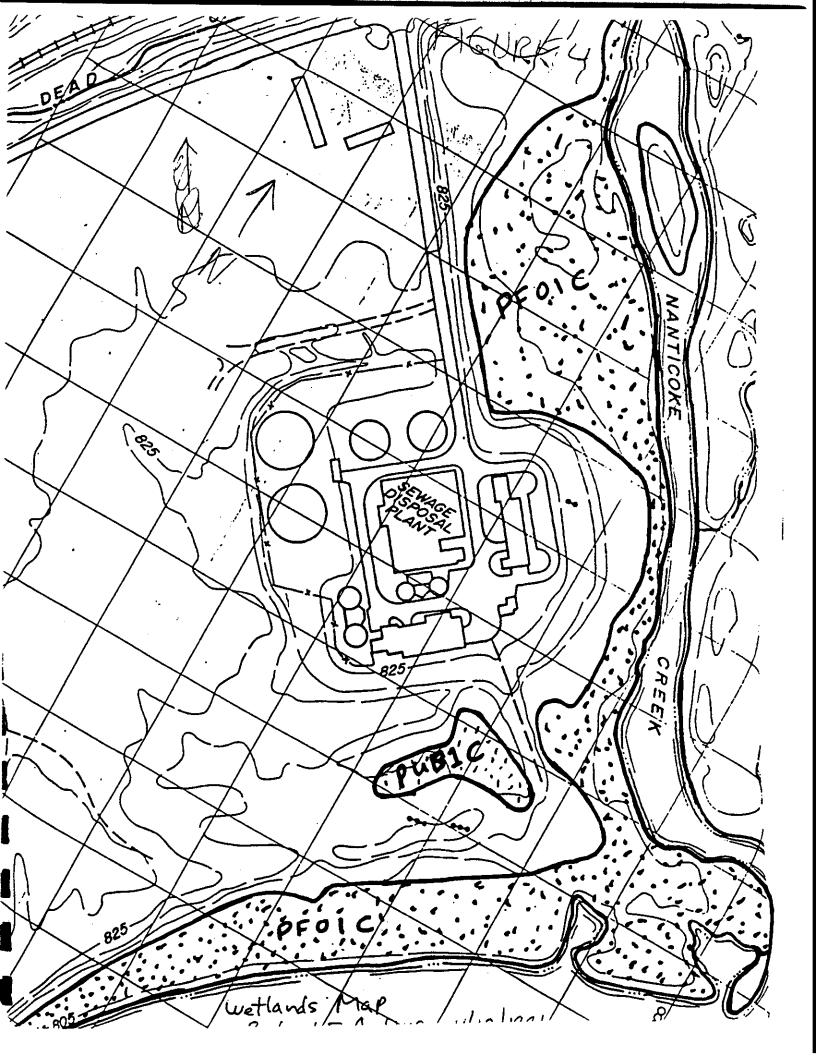

APPENDIX II

TABLES

Tables

- Table [a]: Indicator Contaminants of Potential Concern
- Table [b]: Summary of Chemical Compounds (Detects and Undetects)
- Table [c]: Exposure Pathway Analysis
- Table [d]: Toxicity Data for Noncarcinogenic and Potential Carcinogenic Effects Dose Response Evaluation
- Table [e]: Risk Levels and HI Values, Summary Across Exposure Pathways, Present/Future Use, Resident Adults
- Table [f]: Risk Levels and HI Values, Summary Across Exposure Pathways, Present/Future Use, Resident Children
- Table [g]: Risk Levels and HI Values, Future Use, Construction Workers
- Table [h]: Sources of Uncertainty in Endicott Risk Assessment
- Table [i]: Maximum Contaminant Levels (Federal and more stringent State standards)

MOLE

TABLE 2-1
ENDICOTT WELLFIELD SITE
INDICATOR CONTAMINANTS OF POTENTIAL CONCERN

BY MATRIX

Chemicals Subsurface Soll Volatiles: Acetone X Benzene X 2-Butanone X Carbon Disutifide X Chlorobenzene X Chlorobenzene X Chlorobenzene X	Pond Water S	Surface Water	Sediments	Ground Water	Indicator	.No.	-Yes
Acetone Benzene 2-Butanone Carbon Disuffide Chlordenzene					Contaminant	Justification	dustification
Acetone Benzene 2-Butanone Carbon Disuffide Chlorobenzene							
ne Hsuffide Trane		×	×	×	>		œ
	•			×	>		5.68
	•			×	>	•	•
			•	×	Z	1,3.4	
> Chloroffers	•		•	×	>	•	60
	•				>		· w
1,1-Dichloroethene X	×	•.	•	×	z	1,3.4	
1,2-Dichloroethane X				×	>	•	g
1,1-Dichloroethene				×	>	•	6.7.8
trans-1,2-Dichloroethene				×	>	•	7.8
trans-1,3-Dichloropropena	•			×	>		ω.
Ethylbenzene X	•	•		×	>	•	60
2-Hexanone X	•			×	z	~	•
Methylene Chloride X	×	×	×	×	>	:	8.8
4-Methyl-2-Pentanone X			•		>		. c o
Styrene				•	>	•	9
Tetrachloroethene X		•	•	×	>		6,7,8
1,1,2,2-Tetrachloroethane X	•		•	•	>		ø
Tolbene				×	>		80
Total Xylenes X		•		×	>	•	80
1,1,1-Trichloroethane X			,	×	z	1,3,4	
1,1,2-Trichloroethane X			•	•	>	•	9
Trichloroethene	•	•	•	×	>		8'9
Vinyl Acetate				×	z	1,3,4	
Viryl Chloride X	×			×	>	•	5,6

TABLE 2-1
ENDICOTT WELLFIELD SITE
INDICATOR CONTAMINANTS OF POTENTIAL CONCERN

BY MATRIX

Chemi	icals Votatiles;	Subsurface Soil	Pond Water	Surface Water	Sediments	Ground Water	Indicator Contaminant	"No" Justification	"Yes" Justification
Seattle.	Voigues, Benzolc Acid	x				x	v		
			•	•	-	X	¥	-	8
	Bis(2-ethylhexyl)phthalate	X	-	-	X	X	Υ	-	6,7,8
	Butyl benzyl phthalate	X	-	•	-	X	Υ .	-	8
	4-Chloro-3-Methylphenol	X	•	•	•	X	N	2	•
	2-Chlorophenol	•	-	•	-	X	N	2	-
	1,2-Dichlorobenzene	-	-	•	-	X	, N	2	-
	1,3-Dichlorobenzene	X	-	-		•	, N	2	
	1,4-Dichlorobenzena	X	•	•	-	X	Y	-	6,8
	3,3-Dichlorobenzidine	X	•	-	-	-	Y	-	6,7
	Diethylphthalate	X	-	-	-	X	Y	•	. 8
	2,4-Dimethylphenol	X	•	•	-	x	Y	•	7
	Dimethylphthalate	•	· -	-	-	X	Y	-	8 .
	Di-ri-butyl phthalate	x	•	•	x	X	Y	-	8
	Di-n-octyl phthalate	X	•	•	-	•	Y	•	7,8
	Hexachloroethane	X	•	•	-	X	"Y	•	6
	2-Methylnaphthalene	X	•	•	•	X	N.	2	•
	2-Methylphenol	x	•,	•	•	•	N	2	-
	4-Methylphenol	X	•	-	x	X	Y	-	8
	3-Nitroaniline	•	•	•	-	X	Y	-	8
	4-Nitroaniline	X	•	•	•	•	N	2	-
	n-Nitrosodipropylamine	X	-	•	x	•	Y	•	6,7
	n-Nitrosodiphenylamine	x	•	•	•	•	Y	•	6,8
	Pentachlorophenol	x	•	•	-	•	Y	•	6,8
	Phenol	x	•	-	-	X	Y	-	8
	2,2,4-Trichlorobenzene	x	•	-	-	•	N	2	•

.

TABLE 2-1
ENDICOTT WELLFIELD SITE
INDICATOR CONTAMINANTS OF POTENTIAL CONCERN

BY MATRIX

Chemicals	Subsurface Soll	Pond Water	Surface Water	Sediments	Ground Water	Indicator	No.	763
Carchogenic PAHs						Contaminant	Justification	Justification
Benzo(a)anthracene	×		•	×	•	>	•	et (c
Benzo(a)pyrene	×	•		×	•	>	•) e
Benzo(b)Fluoranthene	×		•	×	•	>	•) .
Benzo(k)Fluoranthene	×		•	×		· >	•	o
Chrysene	×	•	•	×	•	· >		o u
Olbenzo(a,h)anthracene	×	•	,	•		• 2		ė,
Indeno(1,2,3-cd-pyrene)	×	•		×	•	: ≻	, ,	, eg
Noncerchogenic PAHs								•
Acenaphthene	×	•	•	•	•	>		c
Acenaphthylene	×	•		•	•	· z		Ď
Anthracene	×	•	•	×	×	: >	۷ ،	
Benzo(g,h,!)pyrene	•	•	•	×		· 2:		o .
Dibenzofuran	×	•	•	•	×	: z	,	
Fluoranthene	×		•	×		: >		· a
Fluorene	×	•	•	•	•	· >-		, e
Naphthalene	×	,	•	•	•	· >		o ee
Phenentrene	•	•	•	×	r	. 2	٥	•
Pyrene	×	•		×	•	: >		c

TABLE 2-1
ENDICOTT WELLFIELD SITE
INDICATOR CONTAMINANTS OF POTENTIAL CONCERN

BY MATRIX

Chemicals	Subsurface Soll	Pond Water	Surface Water	Sediments	Ground Water	ydealpri		i
PCBs And Pesticide:						Contaminant	Justification	Justification
Aldrin	×							
Alpha-BHC.	: >	•	•	•	×	>	•	ď
Beta-BHC	: ×		•	•	•	Z	2	<u>}</u> ,
Delta-BHC	< >	• 1	•	•		>	1	e e
Gamma-BHC	< >	•	•		•	z	~	3 '
Chlordane(1)	< >	•		•	•	z	i ~	
Aloha Chlordana	< >	•	•	•	×	>		
Gamma Chlordane	< >	•	•		×	>	. ,	6 a
4.4-000	< >-	•	•	•	•	≻	•	o e
4.4.DDE	< >	•	•		•	>	•	
4,4-DDT	< >-	•	•	•	×	>	•	
Dieldrin	< >	•	•	•	•	>		
Endosulfan (2)	< >	•			×	>	•	. d
Endosuffan I	< >	•	•	•		>	•) a
Endosultan 11	< ×	•	•		×	>	•	> α
Endosultan Sulfate	< >	•	•		×	z	1,3,4	, ,
Endrin	< >		•	•	×	z	2	• •
Endrin Ketone	· ×	• 1		•	×	>	•	œ
Heptachlor	: >	•	•		•	z	2	, ,
Heptachlor Epoxide	< ×		•		×	>	•	- C
Methoxychlor	< ×	• ,	•		×	> -	•) (
	:		•		×	> -	•	÷ 60
Total PCBs (3)								
Arodor 1242	>							
Arodor 1248	< >	•	•	•	×	>	•	ď
Arodor 1254	< ×		•	•	•	>	•	. 6
Arodor 1260	×		• •	• .	×	> :	•	6,8
				•	•	>	,	9

INDICATOR CONTAMINANTS OF POTENTIAL CONCERN ENDICOTT WELLFIELD SITE TABLE 2-1

BY MATRIX

Chemicals	Subsurface Soll	Pond Water	Surface Water	Sediments	Ground Water	Indicator	-No-	_Yes_
(norganics:							I Constant	
Atuminum	×			•	×	z	8	
Antimony	×	•	,	•	×	>	•	7
Arsenic	×		•	•	×	>		6.7.8
Bartum	×	×	•	×	×	>		7.8
Beryflum	×		•		×	>		6.7.8
Cadmium	×		•	•	×	>		6.7.8
Caldum	×	×	×	×	×	z	~	•
Chromlum	×		•	•	×	>	•	7,8
Cobet	×	•			×	z	. ~	
Copper	×	•	•		×	z	8	•
lron	×	×	×	×	×	z	8	•
Leed	×			×	×	z	8	
Megnestum	×	×		×	×	z	8	
Manganese	×	×	•	×	×	>		7,8
Mercury	•	•	•	•	×	>		7.8
Nickel (1)	×	•	•	×	×	> -		5,7,8
Potasslum	×		•	•	×	z	N	
Silver		•		×	×	>-	•	60
Sodium	×	•	•	•	×	z	8	•
Vanadtum	×	•	•	٠	×	>		7,8
Zhc	×	×	×	×	×	>		7,8

indicates the contaminant was detected in the matrix.

Indicates the contaminant was not detected in the metrix.

Both trivations and hexavalent chromitum are considered atthough justification 5, 6 and 7 refer to hexavalent chromitum only

Contaminant does not contribute 0.1% to the total risk for the matrix using the toxicity screening analysis.

EPA approved toxicity indices do not exist to quantitatively evaluate the contaminant.

Contaminant does not exceed a 5% frequency of detection.

Contaminant is not a Group A carcinogen.

Contaminant is a Group A carchogen.

Contaminant is a carchogen (or potential) with detections above 1 ug/l (groundwater and surface water) or 1 mg/kg (subsurface soil, surface soils and sediments-inorganic) or 1 ug/kg (surface soll, subsurface solls and sediments - organics).

Contaminant contributes 0.1% or more to the total risk for the matrix using the toxicity screening analysis.

Contaminant exceeds a 5% frequency of detection in one or more matrices.

All Aroctor concentrations are summed and evaluated as total PCBs. ËËËË

Essential and nonessential elements (aluminum, calclum, magnestum, potassium, and sodium) are not evaluated.

1.5

1.5

₹29.E

119.5

B27.5

961'7

727.8

000.1

1,000

000.2

1,000

809.5

1.500

1,000

002.0

005.0

005.0

002.0

00610

002.0

7.992

4,622

990'7

4.260

6'172

186,11

1.353

1.222

1.042

1,064

466'1

1.224

1,000

1,000

1,000

1,000

1,000

TOTAL XYLENES

3H3U101

MOSE: (X)" IN 62% CI COFFINN" (MOSCYLES AVERE 12 CREVIEW LOWLENDE CONCENTRALION: (,)" VZIENJENZ" INDICYTE 1NY 1NE MYMBEN ON OCCUMBENCES 12 100 SWOFF 10 VITON CHICATORY

9-2-MM 000-061

E-88-484 000,55

2-11-M3 DOS'O

4-15-M 009'0

0,750 MJ 27 4

2.E.M 002.0

0.300 MJ-2-3

9-\$1-M3 009'0

41.0

81.0

57'0 0

311	018.5	1,000	002.0	757"7	560°l	000°i	\$ - Z - MM	000.0€	2-59-196	005.0	70.0	0	•	161	12	902	E INVLOENZENE
2.3	128.S	005°L	002.0	217"9	188.1	005°L	9-11-114	900.1	9-P\$2- 7 M	009.0	50.0	0	٤	202	\$	702	CARBON DISULTIDE
3.5	510.£	2,000	009.0	810.2	1"296	000.f	7-72-191	18.000	9-5-83	005.0	12.0	0	92	EYL	63	902	3x3Zx36
3.7	666.5	052'7	2.500	927.6f	291.3	2.500	MI-228-4	000.012	5-85-43	2,000	71°0	6	Ł	841	58	207	3MOT 30A
5.2	3,242	2.500	000.1	245.01	2,113	002.f	£-P9-MH	2,000	101-5-3	3,000	10.0	0	0	507	Z	902	4-WETHYL-2-PENTANDME
5'5	658.S	2.500	2.500	178.21	257.2	2.500	L-39-M	11,000	[- 19 - 7h	000.11	00.0	0	G	502	L	506	2-NEXVIONE
£19	289.5	002.5	2.500	996°021	2.699	2,500	EN-15-1	\$2000,000	1-51-111	900.9	10.0	0	0	506	£	202	S-BUTAMONE
i														•			(enlisatov betamagolak-nok)
				-						•							
İ								000.4582	_	83.400	<=====================================	JATO	12				
5.9	3.936	2.500	009.0	125.7	192-1	000.f	Z-P\$1-7M	000.011	7-82-M	005.0	6.33	0	21	9£1	29	203	AINAL CHECKIDE .
0.8	502. 2	2,000	002.0	197.01	£7₹.f	1,000	9-5-101	100.000	·9·2·e	005.0	55.0	0	SL	25L	S٧	202	11/1CM OROE THENE
8°3	051.S	002.0	0.500	2.184	121.0	005.0	EN-8-3	000.1	£4-8-3	1,000	00.0	0	C	SOZ		902	TRANS-1,3-61CHLOROPROPENE
5~5	3.914	1,000	0.500	056.7	1,152	055.0	I-11-N3	99,000	M1-52-4	009'0	St.0	0	11	100	81	BIL	TANKS-1,2-DICHLOROETHENE
U^L	2.754	000.1	002.0	485.4	960° l	000.f	£411-2	13.000	1-5-7M	3,000	0.03	0	Q	661	2	209	TETRACHLOROETHENE
915	\$27.8	000°7	000.1	8.936	2.633	2.000	M-23-6	000.815 .	し・ケーガヨ	005.0	98.0	0	61	52	781	202	METHYLENE CHLORIDE
292€	887.8	002.81	050.0	184.27	227.5	000.1	9-2-PM	2000,000	Z-901-700	009.0	97*0	0	8	101	90	281	CHLOROETHANE
1.2	3.621	1,000	005.0	066.1	1-328	000.1	MI-1-3	190,000	EN-12-5	009.0	55.0	0	71	424	97	502	CHLOROBENZENE
5"1																	

1) Aplatite (NOA) alliation ()

(Maingenated Volatiles)

1,2-b1chcoroeThANE

1,1-51CMLOROETHENE

1,1-bickLokoETkAkE

1,1,1-TRICILOROETHANE

SE

28

502

902

503

202

902

500

150

502

161

711

ςz

Žί 115 ΣL

26

32

SI 691

TIMES \$3440 DEA" 31118419 CONCENTRATION QUARTILE NV 3H MOLIARIN 30MOD CONCENTRATION SAMPLE ID AVE TO OCCUR DETECT EST REJECT DETECT CONCENTRATION SAMPLE ID ONLID MICE 13 XSG "GNONIS # Jadii 83001 3181 34033 MATG3M 03133130 93123136 -100 **HUMIXAN** MANINIM

5-5-MM 000'91

8-89-1M 000.005

\$10,000 MJ-25-6

1.000 EV-15-3

CROIMO MATER SCHONNER OF CHEMICAL COMPOUNDS (DETECTS + UNDETECTS/2) 3112 01311113W 1T0310K3

3.1

1.1

7.5

5.5

EMDICOTT WELLFIELD SITE SLAWARY OF CHEMICAL COMPOINDS (DETECTS + UNDETECTS/2) CACUMO WATER

PAG

CONFICTINO	VALTD	OCCUM D	UNI: DETECT 6	EST REJ	UN. VALTO OCCUR DETECT EST NEJECT DETECT	NININGN DETECTED CONCENTRATION	. SAMPLE 10	MAKIMIM DETECTED CONCENTRATION	SAMPLE 10	NEDIAN CONCENTRATION	GEOMETRIC	MEAN	LOVER	UPPER	STNDRO.	
VINTL ACETATE	8	-	11		0 0.03	3.000 EV-7-1	EW-7-1	26.000	1-02-71	2.500	2.841			DOWN IN	0EV.	II Wadan
				101	TOTAL BEETS	27.700		23682.000								<u>.</u>
[] Bose Heutral Acid (BNA) ug/L	76															
C Phenole 3 2,4-01METHYLPHENOL 2-CHLOROPHENOL 4-CHLORO-3-NETHLYPHENOL 4-METHYLPHENOL PHENOL	***	4	32238	4 p	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	3.000 2.000 3.000 1.000	M-23-4 M-7-2 M-7-2 M-3-4 M-26-4	8.000 2.000 3.000 10.000	M4-7-2 M4-7-2 M4-7-2 M4-7-2 M4-7-2 M4-2-4	5.000 5.000 5.000 5.000 5.000	4,927 4,937 4,836 4,816 156,3	4.958 4.958 5.972 6.917 4.556	5,000 5,000 5,000 5,000 5,000	5.000 5.000 6.000 7.000 8.000	1.125	9. 2 50. 2 50. 2 50. 3
				TOTAL	****	10.000		29.000								
(Polycyclic Arcmetic Bydrocerbons) 2-WINTLANDINGERE 72 ACEMANTHENE 72 INDEMOLI,2,3-COIPTRENE 72 MARHIMALENE 72	, c c c c	n	8 2 2 8	N 1 1 N	20.000		23-4 23-4 23-4 23-4		M-7-2 M-3-1 M-23-4 M-7-2	5.000 5.000 5.000 5.000	4.840 4.985 5.013 5.040	4,986 4,986 5.014 5.167	5.000 5.000 5.000 5.000	5.000 5.000 5.000 5.000	1.221 1.027 1.022 1.223	5.14 5.01 5.03 5.35
(Benzame) 1,2-bicm.cncmenzene	z	•	3	4		2.000 MJ:22s-4	H-22s-4	30.000 5.000 ma.?-2	W. 7.2	8.000	4.810	1987	908.°¢	900 °	 8-	\$

EBASCO F-111 06/17/92

EMDICOTT WELLFIELD SITE SUPPLARY OF CHEMICAL COMPOUNDS (DETECTS + UNDETECTS/2) GROUND MATER

COMPOUND	VAL ID		UM- DETECT	EST (REJECT	FREQ I DETECT	MINIMUM DETECTED CONCENTRATION	SAMPLE ID	MAKINUM DETECTED CONCENTRATION	SAMPLE ID	MED FAN CONCENTRATION	GECMETRIC MEAN	MEAN CONCENTRATION	LOWER CRIARTILE	UPPER QUARITLE	STHORD. DEV.	95% CI UPPER LIMIT
1,4-DICHLOROBENZENE	n	7	65	7	0	0.10	1,000	MV-22s-4	6.000	MJ-23-4	5.000	4.697	4.806	5.000	5.000	1.290	5.1
				ī	IOTAL	****	3.000		11,000								
(Phthalata Esters)																	
BENZOIC ACID	51	5	46	5	0	9.10	4,000	MV-20-1	28.000	MJ-6s-2	25.000	22.146	23.529	25.000	25.000	1.550	27.3i
DIS[2-ETHYLHEXYL]PHTHALATE	71	45	26	23	e	0.63	1.000	MP+3-4	740,000	EW-12-1	5,000	7,197	20.606	5.000	10,000	2,730	16.24
BUTYL BENZYL PHIMALATE	72	1	71	1	0	0.01	5,000	MI-2-1	5.000	Mr-2-1	5,000	5,000	5.000	5.000	5,000	1,000	5,0
01-n-BUTYLPHTHALATE	72	7	65	4	O	0.10	1,800	MI-24-4	50.000	Mr-25d-4	5.000	4.933	5.764	5.000	5.000	1.632	6.20
BI-m-DCTYL PHINALATE	72	7	65	4	0	0.10	3.000	NU-6d-1	48.000	EW-12-1	5,000	5.387	6.153	5.000	5,000	1,449	6.2
BIETRYLPHTHALATE	72	6	66	6	0	0.08	1.000	IIP+1+4	6.000	MJ-7-2	5.000	4.570	4.778	5.000	5.000	1.452	5.30
DIMETHYL PHYNALATE	72	4	68	4	0	0.06	1.000	IP-3-4	2.000	Ma-25d-4	5.000	4.661	4.806	5,000	5.000	1.354	5.21
				7	IOTAL	****	16,000		879.000					•			•
[] Pesticide/Polychlorineted	i Bipheny	i (PE	ST/PCB) u	1/ L												
(Pesticides)													-	•			
4-4-000	72	2	70	. 1	0	0.03	0.055	#M-28-6-T	0.180	MI-28-4	0.050	0.052	0.053	0.050	0.050	1.170	0.0
4-4-DDE	72	1	71	1	0	0.01	0.006	M-21-4	0.006	HV-21-4	0.050	0.049	0.050	0.050	0.050	1,292	0.0
4-4-801	72	3	69	2	0	0.04	0.007	MJ-22s-4	0.110	MV-9d-1	0.050	0.049	0.050	0.050	0.050	1.386	0.0
ALDRIN	72	2	70	2	0	0.03	0.005	MJ-21-5	. 0.023	MV-21-4	0.025	0.025	0.025	0.025	0.025	1.216	0.0
ALPIKA CINLORDAME	72	1	71	1	0	0.01	0.010	MJ-21-4	0.010	MV-21-4	0.250	0.124	0.181	0.027	0.250	2.928	0.3
	72	2	70	2	0	0.03	0.003	10-1-4	0.011	MV-21-4	0.025	0.024	0.025	0.025	0.025	1.314	0.0
ALPRA-BIC				_	_	0.03	0.01%	MI-21-6-T	0.015	MV-26-4	0.050	0.049	0.050	0.050	0.050	1.246	0.0
ALPHA-BHC DIELDRIN	72	2	70	2	0	0.03											
		2 3	70 69	3	0	0.04		IIP-3-4	0.028	HP-5-4	0.025	0.024	0.025	0.025	0,025	1.231	0.0
DIELORIN	72				-		0.007	MP+3+4 MM+26+4		HP-5-4 HV-26-4	0.025 0.050	0.024 0.051	0.025 0.051	0.025 0.050	0.025 0.050		0.0 0.0
DIELDRIN ENDOSLIFAN I	72 72	3	69	3	0	0.04	0.007 0.055		0.055							1.231 1.052 1.355	0.0 0.0 0.0

EBASCO F-111 06/17/92

ENDICOTY WELLFIELD SITE SUPPLARY OF CHEMICAL COMPOUNDS (DETECTS + UNDETECTS/2)

							HINIMUM		MAXIMA								
		,	UM-			FREQ	DETECTED		DETECTED		MEDIAN	GEOMETRIC	MEAN	LOWER	UPPER	STHORD.	95% CI
COMPOUND	VAL ID	OCCUR F	DETECT 1	EST	REJECT	DETECT	CONCENTRATION	SAMPLE ID	CONCENTRATION	SAMPLE ID	CONCENTRATION	MEAN	CONCENTRATION	QUARTILE	QUARTILE	DEV.	UPPER LIF
MEPTACHLOR	72	8	64	7	0	0.11	0.003	94-24-4	0.100	192-25d-4	0,025	0.023	0.025	0.025	0.025	1.626	
NEPTACHLOR EPOXIDE	72	2	<i>7</i> 0	2	. 0	0.03	0.004	MJ-23-4	0.014	MJ-22s-4	0.025	0.025	0.025	0.025	0.025	1.263	(
METHOXYCHLOR	72	4	68	4	. 0	0.06	0.011	M-26-4	0.032	IM-23-4	0.250	0.220	0.241	0,250	0.250	1.827	ι
					TOTAL	****	0.186		0.597								
(PCBs)	_			_													
AROCLOR 1242	72	1	71	0	0	0.01		#M-7-2		M-7-2	0.250	0.329	0.433	0.250	0,500	1.663	t
AROCLOR 1254	72	3	69	0	0	0.04	1.300	MV-21-4	6.700	Hu-7-2	0,500	0.551	0.669	0.500	0.500	1.523	(
					TOTAL	****	8.600	ŧ	14.000								
[] Inorganic (EHORG) ' U	78 78	76	2	•		0.97	213.000	1 NV-1-1	129000.000	M-10e-2	8290.000	5223.769	20883.295	1180,000	28500,000	8,263	13435:
ANT SHORY	78	1	\bar{n}	0	,	0.01	=	EV-7-1		EW-7-1	10.500	13.438	14.621	10.500	16.500	1.411	13435:
ARSENIC	35	8	27	0	. 0	0.23		EW-6-1		EV-12-1	1.500	3,015	6.197	1.500	2.750	2.974	,. (
BARTUN	58	58	0	0	. 0	1,00		PURGE-1		EW-12-6-T	551,500	588.686	875.724	380.000	746.000	2.082	94
DERYLLIUM	55	1	54	0	. 0	0.02		MJ-26-4-1		MJ-26-4-T	0.500	0.522	0.584	0.500	0.500	1.368	
CADRILIN	83	4	79	D	. 0	0.05		M-28-4-T		EW-11-1	2.500	2.518	2.594	2,500	2,500	1.240	
CALCIUM	85	85	0	•	•	1,00	16400.000	MV-30-4-1	350000,000	MV-15s-T	102000.000	95572.243	112944.706	68150,000	145000.000	1.845	13197
CHRONIUN	55	33	22	0	•	0.60	10.400	MJ-9s-1	195,000	MJ-10e-2	16.300	12.760	32.205	2.500	39.050	4,419	6
COBALT	29	10	19	0	•	0.34	53.500	EW-9-1	175.000	MJ-10s-2	3,000	7.511	34.124	1.500	76.350	6.457	18
COPPER	62	50	12	0	0	0.81	25,300	MV-11-3	422.000	MV-11-2	50,700	38.002	87.623	26.600	112.000	5.018	27
ERON	68	68	0	0	•	1.00	135.000	EW-11-1	303000.000	Mr-10s-2	22550.000	14626.628	51929,441	2510,000	88000.000	7.328	25116
LEAD	36	29	7	0		0.81	3.700	MJ-8s-1	92,000	NA-19-3	11.600	11.131	24.514	5.500	39.700	4.452	7
MAGNESIUM	62	82	•	•	•	1.00	5340.000	W-5-4-1	68600.000	164-229-4-1	23500.000	23126.939	26877.439	18900.000	32600.000	1,758	3062
MAINGANE SE	77	77	0	0	0	1.00	28.500	M/-8d-1	24300.000	MJ-19-2	2740.000	2296.113	4906.875	1190,000	5350.000	4.103	991
MERCURY	. 82	12	70	0		0.15	0.230	MJ-22s-4-T	1.400	MJ-7-1	0.100	0.126	0.172	0,100	0.100	1.834	

EBASCO F-111 06/17/92

; EMPLOJT WELLFIELD STIE SUMMARY OF CHEMICAL COMPOUNDS (DETECTS + UMDETECTS/2) GACHMO MATER

CONFOUND	UNI- FREG VALID OCCUR DETECT EST REJECT DETECT	FREG DETECT	HINIMAN DETECTED CONCENTRATION SAMPLE ID	MAKIMUM DETECTED CONCENTRATION SAMPLE ID	MEDIAN CONCENTRATION	GEOMETRIC Mean	MEAN CONCRETENTION	LOVER	a sadan	STWDRD.	98 CI
HICKEL POTASSIUR SODIUM VARADIUM ZINC	75 42 33 0 67 67 11 0 0 19 13 6 0 0	0.56 1.00 1.00	41.800 MJ-91-6-T 5350.000 EV-15-3 5190.000 MJ-91-6-T 51.200 MJ-24-T 21.000 MJ-104-1	352,000 NW-10s-2 7700,000 NW-6s-1 7-85-00 NW-6s-1 1-87-00 NW-25s-4-1 12500,000 NP-25s-4-1	\$3,100 10235,000 26400,000 \$9,500 190,000	41.203 7953.354 21785.846 22.548	66,899 13912,321 32776,716 52,200	14.500 6160.000 16600.000 2.750	90.600 16900.000 28550.000 62.350		26031 32547 733
	TOTAL	Î	33187.530	15962£2 and			000:000	79.000	310.500		Şê.

18ASCO F-111 n3/16/92

EMDICOTT WELFIFLD SITE SLAWART OF CHENICAL COMPUSACY (DETECTS + UNDETECTS/2) PINCE SAMPLES ONLY

QN DONO.	4 A		SK ·	FS1	נים אנים נים של המינים	UN: FREO VALID OCCIAN DE FECT EST REJECT DETECT	MINIMUM DETECTED CONTRATED	1 de 1	MAXIMUM DETECTED	4	MEDIAN	GEOVETRIC	PE ALI	lover	neer r	STIEBED.		
													CONCERNIENTED		CONTRICT.	.	CARR LIMIT	
il Volatile (VOA) ug/L																		
(Nalogenated Volatiles)																		
1, 1-01 CM CHCE THANE	◄	4	Þ	•	•	8	7.000		9.000	PLACE - 2	5.500	4.94	2.000	5.000	9.000	1.181	6.981 x	
F HL CHOE THAME	~	~	0	•	•	-	44.000		49.000	PLRICE:3	49.000	46.288	46.333	000.0	000.0	- 5	\$1.497 K	
METHYLENE CALORIDE	4	•	•	0	•	8	0.70	PURGE - 2	14.000	PURCE - 6	7.500	1.769	4.175	1.000	14.000	4.012	31191283,093 x	
TRANS-1, 2-DICHLOROETHENE	~	-	-	•	•	0.50	35.000	PURICE - 1	35.000	PURGE - 1	35.000	5.916	18.000	0.000	0.000	12.354		
TR JCHLOROE THENE	•	-	•	-	•	2	0.600	PURCE - 2	0.600	PURGE - 2	1.000	0.800	006'0	1.000	1.000	<u>.</u>		
VINTL CHICKIDE	~	~	•	•	•	÷.	35.000	PURGE -6	39.000	PURCE - 3	39,000	37.284	37.333	0.000	00.000	1.058	•	
					TOTAL	î	119.300		143.600									
(Non-Nalogenated Volatiles) NEWZEWE	•	-	•	-	•	g.2	0.600	PURGE-2	0.600	PURGE - 2	1.000	0.800	0.400	1.000	1.000	 ¥	1.66.1	
					TOTAL	Î	0.600		0,600									
																-		
[] Inorganic (INCRG) ug/L											•							
BARIUM	-	-	0	•	•	8.	206.000	PURSE-1	206.000	NRGE-1	000.0	206.000	206,000	0.00	0.00	- 900	X	
CALCTUM	-	-	•	•	•	8.	91800.000	PURGE - 1	91800.000	PURGE-1	0.000	91800.000	91800,000	0.00	0.000	1.000		
IRON	-	-	•	•	•	. 8	1310.000	PURCE:1	1310.000	PURGE - 1	000.0	1310.000	1310.000	0.00	0.000	1,000	* **********	
MACINE S TUDA	-	-	•	•	•	9 .	19400.000	PURGE-1	19400.000	PURGE-1	0.00	19400,000	194.00,000	0.000	0.000	1.000	×	
MANGANESE	-	-	•	0	•	8		PURGE-1	1290.000	PURGE-1	9.00	1290,000	1290.000	0.00	000.0	1.000	X	
SCOLUM	-	-	•	•	•	÷.	24400.000	PURGE - 1	24400.000	MAGE-1	0.000	24400.000	24400.000	9.000	0.000	1.000	X	
					TOTAL	Î	136406,000		138406.000									

NOTE: (X), IN 95% CT COLUMY, INDICATES VALUE IS GREATER THAN MAXIMUM CONCENTRATION; (*), ASTERISKS, INDICATE THAT THE NUMBER OF OCCURRENCES IS TOO SMALL TO ALLOW CALCULATION

1 MASCO F-111

EMDICOTT VELLIFIED STE SUMMARY OF CHEMICAL COMPOUNDS (DETECTS + UNDETECTS/2) SUMTACE MATER (WITHOUT GOLF COMPSE POND SAMPLES)

			Š			5]41	MINIMIN DETECTED		MAKEMEM DETECIED		ME DIAM	GEORETRIC	# #	tores	UPPER	STHORO.	95 % C1
COPPUIND	VALID	OCCU.	DE 16C1	2	REJECT	VALID OCCUM DETECT EST REJECT DETECT	CONCENTRATION SAMPLE	SAMPLE 10	CONCENTRATION	SAMPLE 10	CONCENTRATION	PE AN	CONCENTRATION	QUART FLE	QUARTILE	9£ v.	UPPER LINIT
Il volatile (vok) ug/L																	
t Natogenated Volatites) MEINYLENE CHLORIDE	8	¥	•	m	•	£.	0.500	0,500 SW-#11-2	11.000	54-07-2	2.500	1.926	2.850	1.000	900'7	2.627	5.642
					TOTAL	TOTAL	0.500		11.000								
(Non-Nalogenated Volatiles) ACEIONE	۶ -	-	2	-	•	6.9	3.000	3.000 SV-N1-2	3.000	5.1#-8	5.000	3.568	3.73	2.500	\$.000	1.617	4.437 x
					TOTAL	101AL	3.000		3.000								
1) Inorganic (180KG) ug/L																	
AL UNITRUM	~ ;	^	-	-	0 0	8 8	235,000	50-811-1	99.000	\$4.55·1	438,000	378.6%	406.200	335.000		1.511	757.846 X
CALCIUM	2 ~	2 ~		-	•	3 8	281.000	Z-11-12	567.000	26-55-1	266.000	487.564	520.286	378.500	249.000	1.48	760.183
HANGAMESE	٠	•	-	•	•	0.99	20,300		139.000	54·113·1	43.600	26.237		28.050	24.200		2629.645 x
21110	~	-	-	-	•	8.	26.700	SV-183-1	58.700	SV-113-1	\$8.70	5.418	99°£	0.00	0000	29.072	7695259586.32 K
					101AL	TOTAL SESSE	13495.000	•	23552.700								

MOTE: (X), IN 95% CI COLUMN, INDICATES VALUE IS GREATER THAN MAXINGS CONCENTRATION; (*), ASTERISAS, INDICATE THAT THE MUMBER OF OCCURRENCES IS TOO SWALL TO ALLOW CALCULATION

26/11/50 131-4 035484

	SURFACE MATER		
	icyr comeonwae (DEIEcia + Ampelecia/5)	OL CHENI	i ilatelii;
)A9	ENDICOLL MEFFELEFD 211E		

								121793,300		35110,000	<=***	JAT	01				
X **** ******	110.81	000.0	000.0	EE8'07	12.293	62.300	1-94-AS	92*200	L-EN-AS	901,82	£9°0	0	0	١,	z	٤	SINC
X 130.43125	\$08.8	006,18	805.85	157,150	38.324	050.23	1-84-AS	000'0911	1-010-NS	20,300	04.0	0	0	1	6	91	HVHCVIIE 2E
X	900.f	900.0	906.6	21400,800	21400,000	000.0	1-94-75	21700 000	1-84-85	21100.000	00 °L	0	0	0	ı.	ŧ	MRIS3N9Wi
£49°£)L	957'1	000.928	000.663	216,358	361.802	906.992	L-SS-AS	000,748	1-14-85	281,000	1.00	0	0	ø	8	9	NONI
342/ 3 8 ° 400	991.1	000,00781	13220,000	581.81955	928,54191	11500,000	1-84-AS	000100126	L-LLM-AS	12400,000	90,1	0	0	0	11	11	MUTOJAO
X *********	900.f	000.0	000.0	900.215	900.215	900.0	1-94-75	200,215	1-84-AS	212,000	00,1	0	0	0	ı	l l	PESTRAN
x 918.41	112.1	\$63,000	222,000	902.804	378.654	428,600	1-53-R5	000'899	L-LIM-MS	000,225	00.f	0	0	•	\$	\$	MINITIA
																	J/gu (18081) sinegroni ()
•								3.000		000.0	<# # 26	JAT	DΙ			-	
x 165.2	217"1	000.8	\$.500	TIT.E	012.2	900.2	Z-LN-MS	900.8	S-IH-AS	000.£	90*0	. 0	ı	22	ı	ξΣ	(sellitatiov betanagolatinati) 3mo132A
								33.000		002.21	<12225 -	JATO	01				
BYE.R	185.5	000.2	000.1	31206	5,496	000.2	2-84-AS	000'1	5-84-NS	000'7	60.0	0	0	12	z	52	VINTE ENLORIDE
277"5	2,544	000*1	000.f	000.₹	£11,S	3,000	S-10-W	000.11	S-114-WS	005.0	72.0	0	٤	9	21	53	HETHYLENE CHECKIDE
595.9	891.5	2,000	1,000	287. E	959°Z	000.2	Z-94·75	13.000	£-84-NS	9,000	60.0	0	0	12	2	52	CINE OPPOET MANE
x 105.5	052.1	2,500	000.1	108.1	979"1	002.5	£-04-AS	\$,000	2-8d-ns	2,000	60.0	0	0	12	2	£5	(matogenated Volatiles)
										4							J/gu (MOY) siliselov ()
13 #29 11H1 J #3990	STNDRD.	3344C 37111WHD		MEAN CONCENTRATION		MEDIAN CONCENTRATION	di 3Jaws	MAKEMEN DETECTED CONCENTRATEON	SWELE 10	DETECTED CONCENTRATION	P381 133130	10363	18 1S	10313		0 QL1VA	COMECUE

HOLE: (X)" IN 958 CL COLUM, INDICATES VALUE IS GREATER THAN MAKINUM CONCENTRATION; (*), ASTERISKS, INDICATE THAT THE HUMBER OF OCCURRENCES IS TOO SMALL TO ALLOW CALCULATION

EMPLICATI VELLETELB SITE STANDARY OF CHEMICAL COMPOUNDS (DETECTS + UNDETECTS/2) SURFACE WATER (GOLF COUNSE POND SAMPLES ONLY)

FBASCO F-1111 03/11/92

Фираноз	VALID OCCUR DETECT EST REJECT DETECT	MIEG DE	MINIMUM DETECTED CONCENTABLION SAMPLE TD	MAXIMINE DETECTED CONCENTRATION SAMPLE 1D	MEDIAN GEON CONCENTRATION MEAN	GEORETHIC MEAN	ME ANI CONCENTRATION	LOWER	UPPER	STHORD. DEV.	95% CI UPPER LIMIT
(Naloperated Volatiles) (, naloperated Volatiles) 1, 1-bich obcethane CM, OROGENANE MEINTLEWE CHLORIDE VINTL CHLORIDE	3 2 1 0 0 0.67 3 2 1 0 0 0.67 3 3 0 0 0 1.00 3 2 1 0 0 0.67	6.0	2,000 SV-86-2 9,000 SV-86-3 3,000 SV-86-1 4,000 SV-86-1 18,000	2,000 S4-P8-3 13,000 S4-P8-2 5,000 S4-P8-2 7,000 S4-P8-2	2.500 13.000 5.000 7.000	2.154 8.363 3.915 5.192	2.167 9.000 4.000 5.333	6.600 6.000 0.000 0.000	9000 0.0000 0.0000 0.0000	1,138 1,619 1,292 1,325	2.933 X 65.927 X 6.513 X 12.749 X
SARTUM CALCIUM INCHESTUM MAGNESTUM MANIGAMESE ZINC	1 1 0 0 0 1.00 1 1 0 0 0 1.00 1 1 0 0 0 1.00 1 1 0 0 0 1.00 1 1 0 0 0 1.00 1 1 0 0 0 1.00	İ	215,000 SW-P6-1 97400,000 SW-P6-1 633,000 SW-P6-1 1160,000 SW-P6-1 63,300 SW-P6-1 63,300 SW-P6-1	215,000 SW-PB-1 97400.000 SW-PB-1 633,000 SW-PB-1 21400.000 SW-PB-1 63,300 SW-PB-1 63,300 SW-PB-1	6.000 6.000 6.000 6.000 6.000	215, 800 97400, 000 633, 000 21400, 000 1160, 000 63, 300	215.800 97400.000 633.000 21400.000 1164.000 63.300	9.000 0.000 0.000 0.000 0.000 0.000	000.0 000.0 000.0 000.0 000.0	1.000 1.000 1.000 1.000 1.000	M M M M M M M M M M M M M M M M M M M

HOTE: (X), IN 95% C! COLUM, INDICATES VALUE IS GREATER THAN MAXIMAN CONCENTRATION; (*), ASTERISMS, INDICATE THAT THE NUMBER OF OCCURRENCES IS TOO SWALL TO ALLOW CALCULATION

•

SUPPLARY OF CHEMICAL COMPOUNDS (DETECTS + UNDETECTS/2) ENDICOTT WELLFIELD SITE SECTIVENT SAMPLES

..

PAGE 1

UPPER LINIT 95X CI STROPP. ě. UPPER GLART ELE MEAN LOWER CONCENTRATION QUARTILE GEOVETRIC MEDIAK CONCENTRATION 2 SMP.E CONCENTRATION DETECTED MAXIME SAMPLE 10 VALID OCCUR DETECT EST REJECT DETECT CONCENTRATION DETECTED HIRINGH FREG Ė 1) Voletite (VOA) ug/kg CHAPCING

4,560 x 30,458 61.071 1.53 2.202 29,000 43.000 3.500 17.000 3.8 3.5 3.5 3.5 41.116 3.714 30.000 4.000 25.000 33.000 \$£0·11·1 %-5×-5× 180.000 SED-55-1 78.000 77.000 180,000 9.000 \$50-010-2 SED-111-1 SED-112-2 1.000 1.000 12.000 9.000 0.93 TOTAL TOTAL 0 ≂ • - 2 2 22 2 (Non-Halogenated Volatiles) (Malogenated Volatiles) WINTLEME CALORIDE TH ORDFORM

() Sase Neutral Acid (BMA) ug/kg

296.761 m 252.821 m 239.114 243.046 279.279 # 255.545 254.182 x 7.7 1.500 1.39 1.36 1.36 1.412 252.500 237.500 215.000 215.000 217.500 252,500 210.000 155.000 165.000 167.500 210.000 200,000 184.909 189.455 205.000 224.182 201.091 209.455 233.182 173.91 172.74 161.047 198.657 216.051 191.728 230.963 220.000 215.000 215.000 215.000 250.000 215.000 250.000 50 St. 1 190.000 \$50-54-1 \$60.\$4.0 \$60.\$4.1 5ED-112-1 X0-55-1 XED-54-1 190.000 766,000 256,000 280,000 91,000 286,000 **2**.88 \$60.58.1 \$60.62.1 190,000 SEB-\$4-1 SED-56-1 SED-83-1 SED-112-1 190,000 69.000 79.000 136.000 91.000 87.000 89.000 9.9 0.45 X 8 3 **** • 무 (Polycycile Argmetic Mydrocerbons) ===== RENZOTES FLUCKANTHENE BENZOIG, M, LIPERYLENE BENZOIR JFLUCRAFINENE BENZO (6) ANT HRACENE (Phenola)
4-METHYLPHEHOL DENZO(a)PTRENE ANTIMACENE

OCCUPATE NCES 8 THE HUMBER NOTE: (X), IN 95% C1 COLUMN, INDICATES VALUE IS GREATER TRAN MAXINGN CONCENTRATION; (*), ASTERISKS, INDICATE TRAT

18 TOD SWALL TO ALLOW CALCULATION

EMDICOTI MELLFIELD SITE SLIBMART OF CHEMICAL COMPCUMDS (DETECTS + UMDETECTS/2) SEDIMENT SAMPLES

r 84 9CD f - 111

							HINIMEN		HAXIMA									
			Ė			FREG	DETECTED		06165160		MEDIAM	GEOVETRIC	KA	LONER	5	UPPER	STHORD.	95X CI
COMPONIO	VALID	VALID OCCUR DETECT EST REJECT DETECT	DE TECT	EST R	E JECT	DETECT	CONCENTRATION	SAMPLE 10	CONCENTRATION	SAPPLE 10	CONCENTRATION	KAR	CONCENTRATION	TON CHARTILE		GUANTILE	DEV.	UPPER LINIT
CHEASENE	=	•	^	-	0	3	₩.000	1-95-035	210.000	X0-X-1	215.000	181.582	191.273		167.500	215.000	1.4.74	245,886.1
F LUCRANT WRE WE	=	•	•	•	•	0.45	900.000	SED-08-1	1500,000	1.98-03	220.000	240.25	332.72	.,	200.000	240.000	2.121	606.916
INDEHOLI, 2, 3.CD] PYRENE	=	-	5	-	•	6.0	94.000	\$50-54-1	64.000	-	250.000	214.465	223.545		210.000	252.500	1.400	283, 383
FHE HANTHRENE	=	•	-	4	•	0.36	62.000	\$50.56-1	330.000	_	215.000	166.708	24.55		200.000	217.500	1.648	300.351
PTREME.	=	•		•	•	0.36	49.000	\$ED-111-1	230.000	SED-112-1	215.000	151.049	177.818		140.000	215.000	2.017	352.605 1
	-			_	TOTAL	•	894.000		3510.000									
(Phthalate Esters)	=	•	4	•	•	3	3	GD.81.1	8	. 70	\$	***	•		1	;	į	
DI - m-BUTYLPHTHALATE	=	~	•	~	•	9.18	70,000		310.000		260.000	264.402	27.27		215.000	260.000	1.35	339.424
				-	10fAL	Î	724 000		000 0101									
				•														
(Others)																		
N-NSTROSCO I PHENY LANINE	=	-	2	-	•	8.0	69 .000	69.000 SED-\$4-1	69.00	¥0·¥·1	250.000	210.664	222.162		210.000	252.500	1.480	294.644
				-	101A - ****	Î	99.69		69.000				,					
il inorganic (1808G) mg/kg																		
ALUMINUM	=	=	•	•	•	8.	900.0649	1.12.036	14,300,000	X0.76.1	11000.000	10534.862	10759.091	_,	9300.008	11250.000	1.24	12366.75
BARTON	•	•	•	6	•	8	87.200	SED-010-1	108,000	SED-P8-1	99.900	71.840	73.57		62.93	67.150	1.75	89.834
- BERTLIUM	٠	-	•	•	•	-1	1.500	\$20-14-1	1.500	\$50 · PB · 1	0.155	0.182	•	9.792	0.12B	0.167	2.235	0.665
CALCIUM	•	=	•	•	•	8.	1180.000	\$0.010-1	7140.000	SED-113-1	1870.000	1975.186	2334.23		1520,000	2090.000	7.7	€023.802
CHROMIUM	=	Ξ	•	•	•	8.	12.600	XED-111-1	225.000	XD-54-1	16.600	20.851	35.736		14.650	17.150	2.28	61.370
COBALT	•	4	۰	•	•	8.	14.000	SED-811-1	16.300	\$£0-07-1	15.800	15.178	15.20		15.200	16.300	1.064	16.791
I ROM	Ξ	Ξ	•	•	•	8	16200.000	X0-X-1	37000,000	SED-07-1	26200.000	25274.613	26345,455		21050.000	28200,000	3	12504.819

Affi (E) if AZY Cf Carinn' imiteres edita ... werene

34 4 4

ć 1.

. .

7.

April 1997 to Shire

No. 8 . Company of the State of

61

\$. ·

h. 1-

26 C 15

Park Inc.

In it is

als . . . t . . .

			·									·					
270.02 818.2 184.201	518.5	097.0	005.05 062.0 092.00	511.25 872.0 215.86	005.85 025.0 105.01	l -95 -035 l -95 -035 l -60-035	11,300	L - \$5 - 63\$ L - 95 - 03\$ L - 2N - 03\$	11,500	٠.	0	0	0 6	ı	11 01 11	13	20112 2015 2016

1-010-035 000'966

1-95-035 005.46

1-60-035 000-0783

CONCENTRATION SAMPLE ID

SEDIMENT SAMPLES AMANYST OF CHEMICAL COMPONES (DETECTS + UNDETECTS/2)

ENDICOTT MELLFTELD STIE

03123130

MINITARY

2 . 15 Say 15

1 10000000

. 1

66.177

('9

Ai Y

... . N.

. . .

Sec. 15.

...

٠,٠٠

.

525 1

3.7

1 :

OWNER

Ç ...

in .5 a

321,000

3510,000

969.415

\$\$7"\$\$9\$

18.500

CONCENTRATION GUMBILLE

#3701

158.853

906.152E

218134039

627'21

MY 304

000'867

000'0509

19,200

CONCENTRATION NEAR

MAIGE

BYCE 2

126.136

151 9919

TIMIT #3440

137,85

1.700

1.258

STINDRD, 95% CI

*A30

005,812

00010609

37118900

#344N

19.300

1471

9-31-19

3 to 4. 1

. 31 .

44.5

121.8

10475

. ...

136 % 12 Y

12 64

26/91/511 111-# 035VB I

HVNCVNE 2E

HYCHE 210M

OWND4HD)

QV 3 1

1-55-035 000.951

1.42-032 000.0025

1-55-035 00212

VALID OCCUR DETECT EST REJECT DETECT CONCENTRATION SAMPLE 10

0381

03133130

MEMINING NA

44

- 100

ENDRIN KETOME

ENDICOTT WELLFIELD STRE SUMMARY OF CHEMICAL COMPOUNDS (DETECTS + LANDETECTS/2) SUBSURFACE SOIL

r OHPOUND	VAL ID		M- PETECT	EST	REJEC	L DE LEC.	MINIMUM DETECTED CONCENTRATION	SAMPLE ID	MAXIMUM DETECTED CONCENTRATION	SAMPLE 10	PEDIAN CONCENTRATION	GEORETRIC TEAN	MEAN CONCENTRATION	LOWER GUARTILE	UPPER QUARTILE	STMDRP. DEV.	95% CI UPPER LIMIT
DIETHTLPHTHALATE	47	8	39	-8	-0	0.17	43.000	SBIN-27-12	500,000	19-1-5	205.000	238,905	455,681	190.000	215,000	2.346	459.573
				,	TOTAL	****	258.000		90630,000								
(Others)														*** ***	170.000	1.910	527.6 /9
3,31-DICHLOROBENZEDINE	47	1	46	1	•	9.02		SMMJ-22-14		\$20W-22-14	375,000	350, 167	468.936	210.000	420,000 1000,000	2.258	1516,144
- MITROANILINE	47	1	46	1	0	0.62		SB-7-14		\$2-7-14	900,000	824.664	1336,936	500.000 195.000	215,000	2.104	424,210
I I I TROSO-DEPROPTE ANTWE	47	5	45	2	0	0.04		SB - 7 - 14	400,000	SR-6-14	210,000	252,616	448.340	192,500	215,000	2.150	430.257
I · WETROSODIPHENYEAHINE	47	3	44	3	0	0.06	77,000	58-7-14	610,000	58-6-14	205.000	250.395	450,170	192.300	213.000	2.1,0	430.2%
				•	TOTAL	****	3105,000		3971,000								
					IUIAL		3103,000		2311.000					•			
		rt (PE) u	#/ kg					ems. 34. 14	a son	4 715	7.121		9,600	2.662	10.47
Pesticides) -6-900	47		39			0.17	0.200	5804-24-14 5004-24-14	37,000		8.500 4.300			2.125		2.662 2.654	
: Pesticides }	47 47	rt c PE B 7	39 40) u	#/ kg	9.17 1 0.15	0. 26 0 0.260	SBM1-24-14	37,600 18,000	TP-5-4	4,300	3,910	5.664	2.125 2.075	9,500	2.654	8.92
Pesticides)6-8086-90E6-90T	47 47 46		39 40 39) u	#/ kg	9 0.17 9 0.15 9 0.15	0.200 0.260 0.250	58-1-14 58-1-14	37,000 18,000 17,000	1P-5-4 58/4-25-14	4,300 3,850	3.910 3.854	5.664 5.466	2.125	9,500 9,500		8.92) 9.63
: Pesticides } L-6-900 L-4-90E L-4-90T ALDRIM	47 47 46		45 40 36) u	#/ kg	0.17 0.15 0.15	0.200 0.260 0.250 0.180	584-24-14 58-1-14 58-8-14	37,000 16,000 17,000 1,600	1P-5-6 58/4-25-14 58-7-14	4,300 3,850 1,450	3,910 3,854 2,017	5,684 5,488 2,723	2.125 2.075 2.050 1.050	9,500 9,500 4,750	2.654 2.734	8.92; 9.63; 3.82;
: Pesticides } L-6-900 L-4-90E L-4-90T ALDRIM	47 47 46 46	8 7 7 4	39 40 39 42 38) u	#/ tg	0.17 0.19 0.19 0.19	0.260 0.260 0.250 0.180 0.180	SBM-24-14 SB-1-14 SB-8-14 SBM-24-14	37,000 16,000 17,000 1,600	TP-5-4 SMW-25-14 SB-7-14 TP-5-6	4,300 3,850 1,456 9,900	3.910 3.854 2.017 4.710	5.684 5.688 2.723 22.342	2.125 2.075 2.050 1.050 1.100	9,500 9,500 4,750 47,500	2.654 2.734 2.309 6.500	8,92) 9,63) 3,82) 112,08)
: Pesticides } i-6-900 i-6-90E i-6-90E i-6-90E iLDRIM ALPRA CHLORDANE ALPRA PHA-9HC	47 47 46 46 46	8 7 7 4 8	39 40 39 42 38 37) u	/p/tg	0.17 0.15 0.15 0.15 0.09	0.260 0.260 0.250 0.180 0.180 0.190	\$844-24-14 \$8-1-14 \$8-8-14 \$844-24-14 \$8-1-14	37,000 18,000 17,000 1,600 13,000 1,400	TP-5-6 SBW-23-14 SB-7-16 TP-5-6 TP-4-6	6,300 3,850 1,650 9,900 1,300	3,910 3,854 2,017 4,710 1,762	5.664 5.466 2.723 22.342 2.566	2.125 2.075 2.050 1.050 1,100	9,500 9,500 4,750 47,500 4,675	2.654 2.734 2.309 6.500	8.92; 9.63; 3.82; 112.08; 3.94;
(Pesticides) L-6-900 L-6-90E L-6-90T ALDRIM ALPHA CHLORDANE ALPHA-9HC RETA-BHC	47 47 46 46 46 47	# 7 7 4 6 10 3	39 40 39 42 38 37) u	#/ tg	0.17 0.19 0.15 0.15 0.17 0.17	0.260 0.260 0.250 0.160 0.160 0.190	\$841-24-14 \$8-1-14 \$8-8-14 \$841-24-14 \$8-1-14 \$P-1-5	37,000 18,000 17,000 1,600 13,000 1,400 2,600	TP-5-6 sww-23-14 sa-7-14 TP-5-6 TP-4-6 TP-5-6	4,300 3,850 1,650 9,900 1,300 2,300	3,910 3,854 2,017 4,710 1,762 2,174	5.664 5.666 2.725 22.342 2.566 2.783	2.125 2.075 2.050 1.050 1.100 1.050	9,500 9,500 4,750 47,500 4,675 4,675	2.654 2.734 2.309 6.500 2.615	8.92; 9.63; 3.82; 112.08; 3.94; 3.59;
: Pesticides)4-8004-90E4-90E4-90E4-90E ALPHA CHLORDANE ALPHA-SHC RETA-BHC DELTA-BHC	47 47 46 46 46 47 47	8 7 7 4 8 10 3	39 40 39 42 30 37 44) u	/p/tg	0.17 0.19 0.15 0.15 0.07 0.17 0.21	0.260 0.260 0.250 0.180 0.180 0.190 2.300	\$864-24-14 \$8-1-14 \$8-8-14 \$804-24-14 \$8-1-14 \$77-1-5 \$77-2-5	37,000 18,000 17,000 1,600 13,000 1,400 2,600 0,440	1P-3-6 SMM-23-14 SM-7-14 1P-5-6 1P-4-6 1P-5-6	4,300 3,850 1,650 9,900 1,300 2,300	3,910 3,854 2,017 4,710 1,762 2,174 2,049	5.664 5.666 2.773 22.342 2.566 2.783 2.743	2.125 2.075 2.050 1.050 1.100 1.050 1.075	9,500 9,500 4,750 47,500 4,675 4,675	2.654 2.734 2.309 6.500 2.615 2.074 2.266	8.92; 9.63; 3.82; 112.08; 3.94; 3.59; 3.79;
(Pesticides)4-8004-90E4-90T ALDRIM ALPHA CHLORDANE ALPHA-BHC BETA-BHC DELTA-BHC DIELDRIM	47 46 46 46 47 47 46	# 7 7 4 6 10 3	39 40 39 42 38 37 44 44 39	3 6 4 4 10 3	##/*# 0 0 0 0 0	0.17 0.19 0.19 0.17 0.17 0.21 0.21 0.00	0.260 0.260 0.250 0.180 0.180 0.190 2.300 0.270	\$844-24-14 \$8-1-14 \$8-8-14 \$804-24-14 \$8-1-16 \$77-1-5 \$77-2-5 \$884-23-14	37,000 18,000 17,000 1,400 13,000 2,400 0,440	1P-3-4 SMM-23-14 SB-7-14 1P-5-6 1P-4-6 1P-5-6 1P-4-6 SMM-26-14	4,300 3,450 1,450 9,900 1,300 2,300 1,950 5,200	3.910 3.854 2.017 4.710 1.762 2.174 2.049 4.063	5.664 5.466 2.723 22.342 2.566 2.763 2.743 5.735	2.125 2.075 2.050 1.050 1.100 1.050 1.075 1.050 2.100	9,500 9,500 4,750 47,500 4,675 4,675 4,750 9,500	2.654 2.734 2.309 6.500 2.615 2.074 2.268 2.696	8,92; 9,63; 3,82; 112,08; 3,94; 3,59; 3,79; 9,50
(Pesticides) L-6-800 L-4-80E L-4-80E ALBRIS ALBRIS ALPMA CHICHDANE ALPMA-BHC BETA-BHC DELTA-BHC DIELDRIN FHOOSULFAN I	47 46 46 46 47 47 46 46	8 7 7 4 8 10 3	39 40 39 42 38 37 44 44 39 43) u	##/*# 0 0 0 0 0	9.17 9.19 9.015 9.015 9.21 9.21 9.00 9.01	0.260 0.260 0.250 0.180 0.190 2.300 0.270 0.160 0.280	SBM-24-14 SB-1-14 SB-8-14 SBM-24-14 SB-1-14 TP-1-5 TP-2-5 SBM-23-14 SB-7-14	37,000 18,000 17,000 1,600 13,000 1,400 2,600 0,440 15,008 0,780	19-5-4 sum-25-14 su-7-14 19-5-6 19-5-6 19-6-6 sum-26-14	4,300 3,450 1,456 9,900 1,300 2,300 1,750 5,200	3.910 3.854 2.017 4.710 1.762 2.174 2.049 4.063 1.977	5.664 5.466 2.723 22.342 2.504 2.763 2.743 5.735 2.443	2.125 2.075 2.050 1.050 1.050 1.050 1.075 1.050 2.100	9,500 9,500 4,750 47,500 4,675 4,675 9,500 4,675	2.654 2.734 2.309 6.500 2.615 2.074 2.268 2.696	8,92; 9,63; 3,82; 112,08; 3,94; 3,59; 3,79; 9,50; 3,77;
I) Pesticide/Polychlorinsto (Pesticides) 6-6-900 6-6-90T ALDRIM ALDRIM CHLORDANE ALDRIA CHLORDANE ALDRIA-BNC DELTA-BNC DELTA-BNC DELTA-BNC DELTA-BNC DELTA-BNC DELTA-BNC DELTA-BNC DELTA-BNC DELTA-BNC	47 46 46 46 47 47 46 46 47	8 7 7 4 8 10 3 2 7 4	39 40 39 42 38 37 44 44 39 43	3 6 6 4 4 4 10 3 2 2 5 4 4 1 1	##/*# 0 0 0 0 0	9.17 9.19 9.019 9.019 9.21 9.21 9.00 9.019	0.200 0.260 0.250 0.180 0.190 2.300 0.270 0.160 0.280	SBN4-24-14 SB-1-14 SB-8-14 SBN4-24-14 SB-1-14 TP-1-5 TP-2-5 SBN4-25-14 SBN4-26-14	37,000 18,000 17,000 1,600 13,000 2,600 0,440 13,000 0,780	TP-5-6 SMM-25-14 SM-7-16 TP-5-6 TP-4-6 TP-5-6 TP-4-6 SMM-26-14 SMM-26-14	4,300 3,450 1,450 9,900 1,300 2,300 1,950 5,200	3,910 3,854 2,017 4,710 1,762 2,174 2,049 4,063 1,977 4,137	5.664 5.466 2.723 22.342 2.504 2.703 2.743 5.735 2.493	2.125 2.075 2.050 1.050 1.050 1.075 1.050 2.100 1.050	9,500 9,500 4,758 47,500 4,675 4,675 4,750 9,500 4,675 9,500	2.654 2.734 2.309 6.500 2.615 2.074 2.268 2.696 2.332	8,92; 9,63; 3,82; 112,08; 3,54; 3,59; 9,50; 3,77; 7,252
(Pesticides) 4-4-906 4-4-90E 4-4-90F ALDRIN ALDRIN ENLORDANE ALPMA-ENC BETA-BNC DELTA-BNC DELTA-BNC DELTA-BNC	47 46 46 46 47 47 46 46	8 7 7 4 8 10 3	39 40 39 42 38 37 44 44 39 43	3 6 4 4 10 3	##/*# 0 0 0 0 0	9.17 9.15 9.15 9.015 9.017 9.01 9.01 9.01 9.01 9.01	0.260 0.260 0.250 0.150 0.190 2.300 0.270 0.160 0.280 1.400	\$81-14 \$8-1-14 \$8-8-14 \$88-1-14 \$8-1-14 \$P-1-5 \$P-2-5 \$88-2-14 \$8-7-14 \$804-25-14	37,000 18,000 17,000 1,600 13,000 1,400 2,600 0,440 15,008 0,780	19-5-4 sum-25-14 su-7-14 19-5-6 19-5-6 19-6-6 sum-26-14	4,300 3,850 1,456 9,900 1,300 2,300 1,950 5,200 1,700 2,750	3,910 3,854 2,017 4,710 1,762 2,174 2,049 4,063 1,977 4,137 3,874	5.664 5.666 2.723 22.542 2.504 2.783 2.743 5.755 2.693 5.572	2.125 2.075 2.050 1.050 1.050 1.050 2.100 1.050 2.100 2.075	9.500 9.500 4.758 47.500 4.675 4.675 9.500 9.500 9.500	2.654 2.734 2.309 6.500 2.615 2.074 2.268 2.696 2.332 2.178	8,92; 9,63; 3,82; 112,08; 3,94; 3,59; 9,50; 3,77; 7,25; 9,11;

EMPLOOT WELLFIELD SITE SUMMAY OF CHEMICAL COMPOUNDS (DETECTS + UNDETECTS/2) SUBSURFACE SOIL

PAGE 5

95X CI 99X CI	136.656 x 4.918 x 3.655 x 3.869 x 40.913 x	795,749 Tab. 496 TO .963 K
STADATO. DEV.	7.103 2.932 2.234 2.367 2.367	1.537 3.059 2.111
UPPER	48,000 4,800 4,673 4,730 46,730	47.750 100.000 95.000
LOVER	1,100 1,050 1,050 1,050	21.000 21.500 21.000
NEAN CONCENTRATION	22.854 2.694 2.706 2.710 26.704	35.002 126.811 54.777
GOTTRIC	6.407 1.760 2.034 1.964 19.035	. E. 20.3 6.24 711.7
MEDIAN CONCENTRATION	7,350 1,875 1,700 1,550 17,000	42,000 90,000 33,500
	9.000 \$8-5.14 0.740 \$8-7.14 1.000 \$884-26-14 3.100 \$8-6.14 19.000 \$8-6.14	69.000 sanu-27-12 960.000 19-5-6 21.000 58-2-14 1056.000
<u>e</u> ·	0.097 \$8:1-14 0.230 \$8:2-14 0.200 \$8:4-14 0.900 \$8:7-14	69.000 sanu-27-12 6.500 19-5-10 21.000 sa.2-14 96.500
	47 37 7 0 0.16 46 7 39 6 0 0.15 47 6 41 6 0 0.13	47 1 46 0 0 0.02 47 12 35 3 0 0.36 47 1 46 1 0 0.02
COMPCUMD CAMPA CPLOPAME CAMPA - BHC	MEPTACHICRE METHORYCHICRE	(PCIB) AMOCLOR 1248 AMOCLOR 1254 AMOCLOR 1260

Il Inorganic (HORG) mg/kg

1409-289 7-884 19-384 1-602 7-602 7-18-3817, 094 91, 204 96, 720 3247, 204 42, 410
1,992 2,041 1,055 3,005 2,009 3,265 1,193 2,167 1,603 1,445
112.00.002 113.500 113.500 102.535 103.0000 103.00000 103.00000 103.0000 103.0000 103.0000 103.0000 103.0000 103.0000 1
9966 .000 3.800 77.300 6.110 6.500 15.800 15.700 15.700 16.200 21950 .000 6.550
12019-149 3-490 196-403 0-519 1-140 13302-500 131-155 15.285 61.161 280302.710 15.800
11055.535 6.466 10.25 0.75 0.75 27.97 15.065 16.15 16.15 16.11 16.17 16.
12500.000 5.000 87.200 6.160 6.460 4.185.000 71.400 21.400 12.200 3710.000
24,000,000 samu-26-14, 21,700 19-1-5 2000,000 19-3-4 3,500 10-1-5 6,510,000 10-1-5 65100,000 10-1-5 701,000 19-1-5 15,000 10-2-45 701,000 19-1-5 15,000,000 samu-22-14, 55,200 10-1-6
1430,000 \$8+1-14 2,800 \$8+1-14 90,900 RM-3-30 0,730 RM-94-20 1,700 S8RM-22-14 1340,000 RM-5-15 7,300 RM-15-10 11,700 RM-13-30 11,000 RM-12-25 7470,000 88-1-14 3,500 RM-154-18
47 47 47 6 0
ALURIUM ANSERIC BANTUM COORAL CACTUM

SUPPARY OF CHEMICAL COMPOLADS (DETECTS + UNDETECTS/2) SUBSURFACE SOIL

g	WALTE OCC		15 ES	HE SECT	UM. FREG		SAPLE 10	MATHUM DETECTED CONCENTRATION	SAPPLE 10	MEDIAN CONCENTRATION	GEOVETRIC	2 N	CONFR	UPPER	STADAD. DEV.	95% C! UPPER L INIT
	9 3	9 9	.		8 8	115.000	M-1-14	1450.000	SBM4-22-14	467.500	435.513	17.13	366.000	ł	1	545.358
	=	•		-	3.		51 - 12 - Mars	2320.000	1 104-15	1455.000			21.400	27.600	1.501	30.947
	T	~	•	•	0.15		M-2-45	2000.000	38-1-14	186.500			181.250			2012.6/4 #
	× 1	3 2 92		• ·	8 :		M. 18 20	30.000	31-92-74 45	17.100			14.600			18.57
	\$	È.	.		8	20.600	Z-1-7	1460.000	7P·1·5	91.000			66.450			249.062
				total.	fotal sees	13930.630		258531.500								

IMBLE LEJ

TABLE 3-1 Endicott Wellfield Exposure Pathway Analysis

Pathway	Receptor	Timeframe Evaluated	·	Degree o Assessm		Rationale for Selection or Exclusion
GROUND WATER		Present	Future	Quant.	Qual.	
Ingestion	Adult/child resident Construction Worker	Yes No	Yes Yes	X X		Affected aquifer is public water supply source. Private wells are in use. Construction workers expected to drink local water during time on job site.
Inhalation	Adult/child resident Construction Worker	Yes No	Yes Yes	X	x	Volatile organics are present in water supply aquifer. Exposure to workers expected to be minimal.
Dermal Contact	Adult/child resident Construction Worker	Yes No	Yes Yes	X	×	Contaminants are present in water supply aquifer. Exposure to workers expected to be minimal.
SURFACE WATER						
Ingestion	Adult/child recreation	Yes	Yes	X		Incidental ingestion during swimming/wading.
Inhalation	Adult recreation(golfers) Other adult recreation Child recreation	Yes No No	Yes No No	X		VOCs detected only in golf course ponds. No significant levels of VOCs detected in other surface water bodies.
Dermal Contact	Adult/child recreation	Yes	Yes	x		Direct contact during swimming/wading.
Fish Consumption	Sub-population	Yes	Yes		x	No biota sampling. Evaluated potential for bioaccumulation.

Table 3-1 Endicott Wellfield Exposure Pathway Analysis

Pathway	Receptor	Timeframe Evaluated	·	Degree o Assessm		Rationale for Selection or Exclusion
		Present	Future	Quant.	Qual.	
SEDIMENT						
Ingestion	Adult/Child recreation	No	No			Sediment ingestion assumed not to occur. Not included in scope of work.
Inhalation	Adult/Child Recreation	No	No			No volatile contaminants detected in sediment.
Dermal Contact	Adult/Child Recreation	Yes	Yes	X		Dermal contact assumed to occur.
SURFACE SOIL						
Ingestion	Adult/child resident	No	No			No surface soil samples taken. Future residential development unlikely.
	Adult/child recreation Adult worker	Yes No	Yes Yes		X X	See above. Contact with surface soil at proposed golf course unlikely.
Inhalation	Adult/child resident	No	No			No surface soil samples taken. Future residential development unlikely.
	Adult/child recreation Adult worker	Yes No	Yes Yes		X X	See above. Contact with surface soil at landfill or proposed golf course unlikely.

e i

, ,

1 1

1 1 1

1 1 1 1

: : 6 4

- 1 1

1 4 1 4 1

Table 3-1
Endicott Wellfield Exposure Pathway Analysis

Pathway	Receptor	Timeframe Evaluated	e*	Degree d Assessn		Rationale for Selection or Exclusion
		Present	Future	Quant.	Qual.	
Dermal Contact	Adult/child resident	No	No			No surface soil samples taken. Future
	Adult/child recreation Adult worker	Yes No	Yes Yes	,	X X	residential development unlikely. See above. Contact with surface soil at proposed golf course unlikely.
SUBSURFACE SOIL	WASTE					-
Ingestion	Adult/child resident (trespasser)	No	No			Occupational incidental ingestion of soil during proposed highway construction.
	, Construction Worker	No	Yes	x		proposed inglivialy estimated.
Inhalation	Adult/child resident (trespasser)	No	No			Occupational inhalation of dusts/VOCs during proposed highway construction.
	Construction Worker	No	Yes	X		
Dermal contact	Adult/child resident (trespasser)	No	No ·			Occupational direct contact with subsurface soil during proposed highway construction.
	Construction Worker	No	Yes	X		g proposou ingiting, continuous.

TABLE 4-1
ENDICOTT WELLFIELD SITE
TOXICITY DATA FOR NONCARCINOGENIC
AND POTENTIAL CARCINOGENIC EFFECTS
DOSE RESPONSE EVALUATION

		Reference Dose		nogeri Reference Dose			Slope Factor	100 1 1 1	
hemical Name	RfD(oral)	RfD(inhalation)	RID (oral sub)	RfD(Initialation, sub)	Oral SF	Welght	Inhalation SF	Weight	Compound
	(mg/Kg-day)	(mg/Kg-day)	(mg/Kg-day)	(mg/Kg-day)	(mg/Kg-day)-1		(mg/Kg-day)-1		w/o Criteria
laties:									
Acetone	1.00E-01	NA	1.00E+00	NA	NA	D	NA	D	2-Hexanon
Benzene	NA	NA .	NA	NA	2.90E-02	Α	2.90E-02	Α	
2-Butanone	5.00E-02	9.00E-02	5.00E-01	9.00E-01	NA	D	NA	Ð	
Carbon Disulfide	1.00E-01	1.00E-02	1.00E-01	ND	NA	NA	NA	NA	
Chlorobenzene	2.00E-02	5.00E-03	2.00E-01	5.00E-02	NA	D	NA	Ð	
Chloroethene	NA	2.90E+00	NA	2.90E+00	NA	NA	NA	NA	
Chloroform	1.00E-02	NA .	1.00E+00	NA	6.10E-03	B2	8.10E-02	B2	
1,1-Dichloroethane*	1.00E-01	1,00E-01	1.00E+00	1.00E+00	NA	C	NA	С	
1,2-Dichlorgethane	NA	NA	NA	NA	9.10E-02	B2	9.10E-02	B 2	
1,1-Dichlorcethene	9.00E-03	ND	9.00E-03	ND	6.00E-01	С	1.20E+00	C	
Trans -1,2- Dichloroethene*	2.00E-02	ND	2.00E-01	ND	NA	NA	NA	NA	
Trans-1,3-Dichloropropene*	3.00E-04	2.00E-02	3.00E-03	2.00E-02	1.80E-01	B 2	1.30E-01	B2	
Ethylbenzene	1.00E-01	2.90E-01	1.00E+00	2.90E-01	NA	D	NA	D	
Methylene Chloride	6.00E-02	8.60E-01	6.00E-02	8.60E-01	7.50E-03	82	1.65E-03	B2	
4-Methyl-2-pentanone	5.00E-02	2.00E-02	NA	NA	NA	NA	NA .	NA	
Styrene	2.00E-01	ND	2.00E+00	ND	3.00E-02	B 2	2.00E-03	B2	
Tetrachloroethene	1.00E-02	NA	1.00E-01	NA	5,10E-02	B2	1.80E-03	B2	
1,1,2,2-Tetrachloroethane	NA	NA	NA	NA NA	2.00E-01	С	2.00E-01	C	
Toluene	2.00E-01	2.00E+00	2.00E+00	2.70E-01	NA	D.	NA	D	
Total Xylenes	2.00E+00	8.60E-02	4,00E+00	8.60E-02	NA	D	NA.	Ď	
1,1,1-Trichioroethane	9.00E-02	3.00E-01	9.00E-01	3,00E+00	NA	D	NA.	D	
1,1,2-Trichloroethane*	4.00E-03	ND	NA	NA	5.70E-02	Č	5.70E-02	Č .	
Trichtoroethene*	NA	NA	NA	NA.	1.10E-02	B2	1.70E-02	B2	
Vinyi Chloride	NA	NA	NA	NA	1.90E+00	A	2.90E-01	A	
Vinyl Acetate	1.00E+00	2.00E-01	1.00E+00	2.00E-01	NA NA	NA.	NA	NA NA	

1117/22 15-

TABLE 4-1

ENDICOTT WELLFIELD SITE
TOXICITY DATA FOR MONCARCINGENIC
AND POTENTIAL CARCINGENIC EFFECTS
DOSE RESPONSE EVALUATION

A Company of State of		Slope Fector	ueboupæ	9	ecol acresion Reference Dose	Subahrania Nancera	Reference Dose	Nonoardinogen	
Compounds	Meight	42 nobaledni	Weight	S ISIO	(due ,nobeledni)OtA	(due lato) OIA	(notisiadal)OhFl	(Isro)OIR	Chambol Nembrio
W/O Cifferia	•	յ-(մեր-ճչկչեա)		(w8\x8-qsk)-1	(wâ\kB-qek)	(mg/Kg-day)	(mg/Kg-day)	(шаука-дах)	South Adapted.
Acenaphtrylene	a	٧N	Q.	AN	٧N	4.00E+00	AN	4.00E+00	Beuzolc Acid Semi-Volatiles;
enetyne9(f,ñ,ĝ)osne8	BS	٧N	95	1.40E-02	AN	2.00E-02	AN	2.00E-02	etalertrick(lyxerllyrthe-S)ele
S-Chloronaphthalene	3	ΨN	0	AN	QN	2.00E+00	an .	2.00E-01	Butyl benzyl phinalate
4-Chloro-3-Methylphenc	3	AN	0	2.40E-02	٧N	AN	2.00E-01	AN	eneznedovolrbiQ-A, t
nandi (nam a alama a	58	٧N	BS	4.50E-01	٧N	YN	AN	٧N	enibiznedovokbiCI-E, E
enexnedonolribl@-£,1	a	٧N	a	₩	٧N	8.00E+00	QN	8.00E-01	Diethylphtratate
	ΑN	∀N	AN	AN	QN	2.00E-01	ON CH	2,00E-02	
2-Methyinaphithalane 3-Nitroaniilne	a	AN	Q.	AN	AN	1.00E+00	YN .	1.00E-01	Z,4-Dimethylphenol Di-n-butyl phthalate
entineatil-	AN	AN	AN	AN	AN	2,00E-02	an	2.005-02	DJ-U-ock) bygjalapa
enendrisneriq	0	1.40E-02	9	1.40E-02	QN	1.00E-02	an	1,005-03	Hexachloroethere*
2,2,4-Trichlorobenzene	9	AN	0	AN	AN	∀N	٧N	\$.00E-02	S-Weithylphenol
	9	٧N	9	ΨN	AN	ΥN	AN	5.00E-02	
	85	٧N	85	00+∃00.Y	٧N	AN	AN	٧N	"enimalyqoxqlbocoxin-n
	85	ΥN	85	€0-306.≯	VN .	٧N	AN	AN	enimatyneriqfbocotili-n
	85	ON	85	1.205.01	AN	3.00E-02	QN	3.00E-02	Pentachioropherol*
	a	AN	a	ΨN	ΑN	10-300.8	GN	10-300.8	loneriq
									Carcinogenic PAHs
	85	6.10E+00	28	10+3&1.1	٧N	YN	AN	, VN	Benzo(a)pyrene
			,						Moncarcinogenic PAHs
	a	VN	a	₩N	VN	6.00E-01	٧N	S.00E-02	enertridenesA
	q	٧N	a	٧N	∀N	3.00E+00	٧N	3.00E-01	enecentinA.
	VΝ	٧N	ΑN	٧N	AN	10-300.	VΝ	4.00E-02	enentinarou(T
	a	¥N	a	VN	٧N	4.00E-01	AN	4.00E-02	enevou(-)
	a	VN	a	AN	ΨN	4.00E-02	AN	4.00€-03	enelertriqeM
	a	. VN	G	ΑN	AN	3.00E-01	AN	3.00E-02	Pyrene

TABLE 4-1
ENDICOTT WELLFIELD SITE
TOXICITY DATA FOR NONCARCINOGENIC
AND POTENTIAL CARCINOGENIC EFFECTS
DOSE RESPONSE EVALUATION

建筑性 植物 名为公内人工	Noncerdnogen	Reference Dose	Subchronio Noncerci	nogen Reference Dose		erdnogen	Slope Factor	* ****	
Chamical Name	RfD(oral)	RfD(inhalation)	RfD (oral sub)	RfD(Inhalation, sub)	Oral SF	Weight	Inhalation SF	Weight	Compounds
	(mg/Kg-day)	(mg/Kg-day)	(mg/Kg-day)	(mg/Kg-day)	(mg/Kg-day)-1		(mg/Kg-day)-1		w/o Criteria
PCBs And Pesticide:									
Aldrin	3.00E-05	NA	3.00E-05	NA	1.70E+01	B2	1.70E+01	B2	Alpha-BHC
Beta-BHC	NA	NA	NA	NA	1.80E+00	C	1.80E+00	Ç	Delte-BHC
Chlordane(1)	6.00E-05	ND	6.00E-05	ND	1.30E+00	B2	1.30E+00	B2	Endodulfan Sulfante
4,4'-DDD	NA NA	NA	NA	NA	2.40E-01	B2	NA	B2	Endrin Ketone
4,4'-DDE	NA -	NA	NA	NA	3.40E-01	B2	NA	B2	Gamma-BHC
4,4'-DDT	5.00E-04	ND	5.00E-04	NA	3.40E-01	B2	3,40E-01	B2	
Dieldrin	5.00E-05	ND	5.00E-05	NA	1.60E+01	B2	1.60E+01	B2	
Endosulfan (2)	5.00E-05	ND	1.00E-04	NA	NA	NA	NA	NA	
Endrin	3.00E-04	ND	5.00E-04	NA ·	NA	D	NA	D.	
Heptachlor*	5.00E-04	ND	5.00E-04	NA	4.50E+00	B2	4.50E+00	B2	
Heptachlor Epoxide	1.30E-05	NA	5.00E-04	NA	9.10E+00	B2	9.10E+00	B2	
Methoxychlor	5.00E-03	ND	5.00E-03	NA	NA	D	NA	D	
Total PCBs (3)	NA	ND	NA	NA	7.70E+00	B2	NA	B2	

^{(1).} Alpha Chlordane and Gemma chlordane are evaluated as chlordane

⁽²⁾ Endosulfan I and Endosulfan II are evaluated as endosulfan

⁽³⁾ Alli PCBs are evaluated as Aroclor 1260

TABLE 4-1
ENDICOTT WELLFIELD SITE
TOXICITY DATA FOR NONCARCINOGENIC
AND POTENTIAL CARCINOGENIC EFFECTS
DOSE RESPONSE EVALUATION

	Nohoardnogen	Reference Dose	Subchronio Noncard	nogen Reference Dose		ardnogen	Slope Factor		The second second
Chamical Name	RfD(oral) (mg/Kg-day)	RfD(inhalation) (mg/Kg-day)	RfD (oral sub) (mg/Kg-day)	RfD(inhalation, sub) (mg/Kg-day)	Oral SF (mg/Kg-day)-1	Weight	Inhalation SF (mg/Kg-day)-1	Weight	Compounds w/o Criteria
Inorganics:									
Antimony	4.00E-04	NA	4.00E-04	NA NA	NA	NA	NA	NA	
Arsenic	1,00E-03	NA	1.00E-03	NA	1.75E+00	A	1.50E+01	A	Atuminium
Barlum	7.00E-02	1.00E-04	5.00E-02	1.00E-03	NA	NA	NA	NA	Calclum
Beryllum	5.00E-03	ND	5.00E-03	NA	4.30E+00	B2	8.40E+00	B2	Cobalt
Cadmium	1.00E-03food	NA	NA	NA	NA	B1	6.30E+00	Bi	Copper
	5.00E-04water								Iron
Chromium (III)	1.00E+00	2.00E-06	1.00E+01	2.00E-05	NA	NA ·	NA	NA	Lead
Chromium (VI)	5.00E-03	2.00E-06	2.00E-02	2.00E-05	NA	NA	4.20E+01	A	Magnesium
Manganese	1.00E-01	4.00E-04	1.00E-01	1.10E-04	NA	D	NA	. D	Potassium
Mercury	3.00E-04	8.60E-05	3.00E-04	8.60E-05	NA	Ð	NA	D	Sodium
Nickel (1)	2.00E-02	NA	2.00E-02	ND	NA	A	8.40E-01	A	
Silver	3.00E-03	NA	0.003*	NA	NA	D	NA	D	
Vanadium	7.00E-03	NA	7.00E-03	NA	NA	NA	NA	NA	
Zinc	2.00E-01	NA	2.00E-01	NA	NA	D	NA	D	

EPA Weight of Evidence Classifications are as follows:

Note:

Group A:- Human Carcine	ogen. Sufficient evidence from epidemiologic studies to support a causal association between exposure and cancer.
-------------------------	---

Group B1: Probable Human Carcinogen. Limited evidence of carcinogenicity in human from epidemiological studies.

Group B2:- Probable Human Carcinogen. Sufficient evidence of carcinogenicity in animals, Inadequate evidence of carcinogenicity in humans.

Group C:- Possible Human Carcinogen. Limited evidence of carcinogenicity in animals.

Group D:- Not Classified. Inadequate ebedence of carcinogenicity in animals.

All toxicity Values unless otherwise noted are from integrated Risk Information System (IRIS) June 1991 sessions.

* Toxicity values are from Health Effects Assessment Summary Tables (HEAST)-1991 Annual (USEPA, 1991).

NA :Not Available ND : Not Detected

(1) The oral RfD represents the soluble salt form of nickel. The inhalation SF represents the nickel refinery dust form of the chemical for conservatism.

Table 5-25
Endicott Wellfield Site
Risk Levels and Hazard Index Values
Summary Across Exposure Pathways
Present/Future Use Scenarios - Resident Adults

Present/Future Use Scenarios: Adult Residents	Carcinogenic Risk Levels Reasonable Maximum Exposure	Noncarcinogenic Hazard Index Values Reasonable Maximum Exposure
1) Exposure to Ground Water		
Inhalation	7.90E-05	1.00E-01
Ingestion	1.11E-03	1.36E+01
Dermal Contact	3.74E-06	5.20E-02
2) Exposure to Creek/River Water	•	
Ingestion	2.66E-08	2.60E-03
Dermal Contact	2.69E-10	4.89E-06
4) Exposure to Sediment		
Dermal Contact	9.70E-07	1.04E-02

Total health Risk = Ground water ingestion + Ground water volatile inhalation + Ground water dermal contact +

River/Creek water ingestion + River/Creek water dermal contact + Golf Course Pond volatile inhalation +

River/Creek sediment dermal contact

SUMMATION RESULTS

Carcinogens

Reasonable Maximum Exposure = 1.19E-03

Noncarcinogens

Reasonable Maximum Exposure = 1.38E+01

Present/Future Use Scenarios - Resident Children Summary Across Exposure Pathways Risk Levels and Hazard Index Values **Endicott Wellfield Site Table 5-26**

Noncarcinogenic Hazard Index Values Reasonable Maximum Exposure	2.15E-01 2.83E+01 6.86E-02	7.24E-03 6.45E-06	9.72E-03
Carcinogenic Risk Levels Reasonable Maximum Exposure	1.69E-05 4.44E-04 1.03E-06	1.48E-08 2.36E-11	1.80E-07
Present/Future Use Scenarios: Child Residents	Exposure to Ground Water Inhalation Ingestion Dermal Contact	 Exposure to Creek/River Water Ingestion Dermal Contact 	 Exposure to Sediment Dermal Contact

Total health risk = Ground water ingestion + Ground water volatile inhalation + Ground water dermal Contact + River/Creek water ingestion + River/Creek water dermal contact +

SUMMATION RESULTS

Carcinogens Reasonable Maximum Exposure =

4.62E-04

Reasonable Maximum Exposure = Noncarcinogens

2.86E+01

ITHINK LIGHT

Table 5-27
Endicott Wellfield Site
Risk Levels and Hazard Index Values
Summary Across Exposure Pathways
Future Use Scenario - Construction Workers

Future Use Scenario:	Construction Workers

Carcinogenic Risk Levels Reasonable Maximum Exposure

Noncarcinogenic Hazard Index Values Reasonable Maximum Exposure

1) Exposure to Ground Water

Ingestion

3.97E-05

4.79E+00

2) Exposure to Subsurface Soil/Waste

Ingestion Inhalation Dermal Contact

2.64E-06 5.52E-09 2.36E-06

2.29E-02 8.50E-04

3.30E-03

Total health risk = Ground water ingestion + subsurface soil ingestion + subsurface soil dermal contact

SUMMATION RESULTS

Carcinogens

Reasonable Maximum Exposure = 4.47E-05

Noncarcinogens

Reasonable Maximum Exposure = 4.82E+00

TABLE 6-1 Endicott Wellfield Site Sources of Uncertainty in the Risk Assessment

	·	
Source of Uncertainty	Likely Magnitude of Uncertainty	Level of Bias Introduced
1. Sampling/Analytical Procedures		
Reasonable maximum case exposure point concentrations calculated using 95% UCLs on the geometric mean of all analyses.	Low to moderate	Slight downward bias.
Highest contaminant levels used to develop reasonable maximum case exposure estimates when exceeded by 95% UCL.	Low	Gives realistic contaminant level for calculation of reasonable maximum risk.
Contaminant levels from borings into landfill materials used to develop subsurface soil pathways.	Moderate	Moderate upward bias of exposure estimates.
2. Exposure/Intake Assessment Methods		
Potential for varying future land use.	Low	Slight upward bias, highway construction would likely result in greater exposures than golf course development. No residential use expected.
Particulate generation and transport	Moderate to high; estimates of hard to a quantify conditions, processes and	Moderate upward bias of exposure estimates.

parameters are required.

TASLE [h]

Table 6-1
Endicott Wellfield Site
Sources of Uncertainty in the Risk Assessment

chloroethane, and other chemicals.

	·	•
Exposure estimates assume contaminants are conservative over time	Moderate for future use scenario exposures	Slight to moderate upward bias for future scenarios; landfill contaminant output may
Estimates of physiological, behavioral parameters for receptors	Low - parameters are defined for special populations	Slight, if any.
Estimates of exposure frequency/duration	Low to moderate - scenarios incorporate ranges of uncertainties concerning likely exposures	Slight upward bias.
Estimates of contaminant contact rates, intake factors.	Moderate	Moderate upward bias for soil ingestion and inhalation, dermal contact likely conservative.
Use of model to calculate golfer exposure to volatile contaminants.	Moderate	Moderate upward bias.
3. Toxicologic/Risk Characterization Methods	S	
RfD/CDI ratios to characterize non-cancer health effects.	Moderate to high - data supporting RfD developments are highly variable; uncertainty factors vary by orders of magnitude.	RfDs are likely to be defined conserva- tively for most pollutants.
Lack of toxicity criteria for lead,	Low to moderate; concentrations and	Calculated risks for media may be

distribution of chemicals in site matrices vary;

potential health effects vary.

understated.

Table 6-1
Endicott Wellfield Site
Sources of Uncertainty in the Risk Assessment

Speciation of Chromium - 95% Cr III to 5% Cr VI ratio.

Moderate

SFs, linear low-dose model to assess cancer risks.

Moderate to high - most SFs are derived from animal bioassay data.

Assumption that effects of multiple contaminant exposures are additive.

Low to moderate.

Unknown - inadequate data on speciation of chromium on-site.

Likely upward bias; SFs are 95% UCLs of cancer risk slopes.

Unknown if synergies or antagonisms exist among contaminants.

TABLE 2-1

CHEMICAL-SPECIFIC ARARS

Chemical	SDWA ^(a) MCLs	SDWA ^(a) MCLGs	N.Y. ^(b) MCLs	N.Y. Ground Water ^(c) Quality Criteria	N.Y. Surface Water ^(d) Quality Criteria
	mg/l	mg/l	mg/l	ug/l	ug/l
VOLATILES:	,	-	•	•	_
	4-1				
Acetone	(e)		0.05(f)		
Benzene 2 Ditangan	0.005	0	0.005(g)	0.7	0.7
2-Butanone	***	-	0.05(f)		
Chlorobenzene		 .	0.005(g)	5(h)	5A/20H(i)
Dibromochloromethane		 .	0.1(j)	0.1(j)	••
1,2-Dichloroethane	0.005	0	0.005(g)	5(h)	0.8
1,1-Dichloroethene	0.007	0.007	0.005(g)	5(h)	· +-
trans-1,2-Dichloroethene	0.1	0.1	0.005(g)	5(h)	 ,
trans-1,3-Dichloropropene	. ••		0.005(g)	5(h)	••
Ethylbenzene	0.7	0.7	0.005(g)	5(h)	
Methylene Chloride(k)	0.005	0	0.005(g)	5(h)	••
4-Methyl-2-Pentanone	**		0.05(f)	•	
Tetrachioroethene	0.005	0	0.005(g)	5(h)	••
Toluene	1	1	0.005(g)	5(h)	
Total Xylenes	10	10	0.005(g)	5(h)	••
Trichloroethene	0.005	0	0.005(g)	5(h)	
Vinyi Chloride	0.002	0	0.002	ž	••
SEMIVOLATILES:					
Benzoic Acid	•=		0.05(f)		••
Bis(2-ethylhexyl)phthalate	••	••	0.05(f)	50	0.6
Butyl benzyl phthalate(k)	0.1	0	0.05(f)	••	••
1,4-Dichlorobenzene	0.075	0.075	0.005(g)	4.7	5A/30 H(i)
Diethylphthalate	••		0.05(f)	••	
2,4-Dimethylphenol	••		0.05(f)	1(1)	5A/1H(m)
Dimethylphthalate	==		0.05(f)	***	
Di-n-butyl phthalate	••		0.05(1)	50	••
Hexachloroethane	••	•	0.005(g)	5(h)	••
4-Methylphenol	••	••	0.05(f)	1(1)	5A/1H(m)
3-Nitroaniline			0.005(g)	5(h)	5/4 TT ((11)
Phenoi:					5A/11/(m)
Carcinogenic PAHs(k)	0.0002	0	0.05(f)	1(I) ND (0.0)	5A/1H(i,m)
Anthracene		·	0.05(f) 0.05(f)	ND (n,o) 	
PCBs and Pesticipes:	•				
Aldrin			0.05/0	ND	0.004
	2 222		0.05(f)	ND 0.1	0.001
Chlordane	0.002	0	0.05(f)	0.1	0.001A/0.01H(i)
4,4-DDE			0.05(f)	ND	0.004
Dieldrin Endanska			0.05(f)	ND	0.001
Endosulfan		-	0.05(f)		0.009
Endrin(k)	0.002	0.002	0.0002	ND	0.2(p)
Heptachlor _	0.0004	0	0.05(f)	ND	0.001A/0.009H(i
Heptachlor Epoxide	0.0002	0	0.05(f)	ND	0.001A/0.009 H(
Total PCBs	0.0005	0	0.05(f)	0.1	0.001A/0.01 H(i

TABLE 2-1 (Continued)

Chemical	SDWA(a) MCLs	SDWA ^(a) MCLGs	N.Y. ^(b) MCLs	N.Y. Ground Water ^(c) Quality Criteria	N.Y. Surface Water ^(d) Quality Criteria
	mg/l	mg/l	mg/l	ug/l	ug/l
INORGANICS:					
Antimony(k)	0.01/0.005	0.003		••	••
Arsenic	0.05		0.05	25	50
Barium	2(q)	2(q)	1.0	1000	1000
Beryllium(k)	0.001	ò		••	11/1100(r)
Cadmium	0.005	0.005	0.01	10	*/10(s)
Chromium	0.1	0.1	0.05	50	50
Lead(t)	0.05		0.05	25	*/50(u)
Manganese	0.05(v)		0.3(v)	300(w)	30Ò
Mercury	0.002	0.002	0.002	2	2
Nickel(k)	0.1	0.1	-	-	(x)
Silver	0.05(v)	••	0.05	50	0.1A(y)/50 H(i)

- a. Federal Safe Drinking Water Act (SDWA), maximum contaminant levels (MCLs) and maximum contaminant level goals (MCLGs), 40 CFR 141.
- b. New York Public Water Supply Regulations, MCLs, 10 NYCRR 5.
- c. New York Class GA groundwater quality criteria; taken from Table 1 in 6 NYCRR 703.5
- d. New York Class A/AA surface water quality criteria; taken from Table 1 in 6 NYCRR 703.5
- e. "--" denotes "not listed."
- f. A N.Y. MCL of 0.005 mg/l is assumed, because this compound is classified as a principal organic contaminant (10 NYCRR 5-1.1) and has no specific N.Y. MCL (10 NYCRR 5-1.52).
- g. Because this compound has no specific N.Y. MCL (10 NYCRR 5-1.52) and is not classified as a principal organic contaminant (10 NYCRR 5-1.1), the N.Y. MCL for unspecified organic contaminants of 0.05 mg/l is assumed (10 NYCRR 5-1.52).
- h. A standard for principal organic contaminants of 5 ug/l is given for those compounds classified as such (6 NYCRR 702.1) and are not listed in Table 1 of 6 NYCRR 703.5.
- i. "A" follows the aquatic life criterion; "H" follows the human health criterion.
- j. Total tribalomethanes.
- k. SDWA MCL and MCLG values shown are proposed; current promulgated MCL and MCLG values do not exist.
- 1. A level of 1 ug/l is the standard for total phenolic compounds.
- m. The criterion based on toxicity to aquatic life (5 ug/l) is that for total unchlorinated phenols. The criterion based on human toxicity (1 ug/l) is that for total phenols.
- n. Criteria for benzo(a)pyrene are used to represent carcinogenic PAHs.
- o.. "ND" means "not detectable" using the prescribed analytical method (6 NYCRR 700).
- p. A value of 0.002 ug/l is given if estimated bioaccumulation is considered in the derivation of the criterion.
- q. The proposed MCL and MCLG for barium is 2 mg/l. The current MCL is 1 mg/l.
- r. 11 ug/l when hardness is less than or equal to 75 ppm. 1100 ug/l when hardness is greater than 75 ppm.
- s. The surface water criterion based on toxicity to aquatic life (*) is exp (0.7852 [In (ppm hardness)] 3.490). The human health criterion is 10 ug/l.
- t. Effective December 8, 1992, a treatment technique will be used in lieu of an MCL, and the MCLG will be zero.
- u. The criterion based on toxicity to aquatic life (*) is exp (1.266 [ln (ppm hardness)] 4.661). The criterion for human toxicity is 50 ug/l.
- v. Secondary MCL based on aesthetic qualities instead of health-based considerations; not promulgated.
- w. The groundwater criterion for iron and manganese combined is 500 ug/l.
- x. The surface water criterion for nickel is exp (0.76 [ln (ppm hardness)] + 1.06).
- y. Applies to ionic silver.

APPENDIX III ADMINISTRATIVE RECORD INDEX

Documents Added to the Endicott Wellfield Superfund Site Administrative Record File

General Documents:

OSWER Directive 9355.3-11FS, Streamlining the RI/FS for CERCLA Municipal Landfill Sites

OSWER Directive 9355.0-30, Role of the Baseline Risk Assessment in Superfund Remedy Selection Decisions, dated April 22, 1991

Site-specific Documents:

March 13, 1991 letter from Louis DeRose of FAA to Dennis Whittaker of IBM, regarding fence within Runway Object Free Area (ROFA) of Tri-Cities Airport

June 25, 1991 letter from Carole Petersen of EPA to FAA, regarding ROFA fence

October 7, 1991 letter from Anthony Spera of the FAA to Dennis Whittaker of IBM, regarding ROFA fence

Remedial Investigation Report, dated February 1992

Sampling Report from EPA Edison, dated April 30, 1992

May 4, 1992 letter from EPA to Dennis Whittaker of IBM, conditionally approving Remedial Investigation Report

EPA Final Risk Assessment, dated June 1992 (Ebasco)

Environmental Review Report (supplement to RI Report), dated June 1992

June 29, 1992 Preliminary Screening Letter from IBM to EPA

Feasibility Study Report, dated July 1992

August 5, 1992 letter from Malcolm Pirnie, Inc. to Eugene Kudgus, Village of Endicott, commenting on IBM's Preliminary Screening

Feasibility Study Addendum, dated August 19, 1992 (Alternative 5)

Feasibility Study Addendum Letter Report, dated August 19, 1992 (Alternative 5A)

EPA statement for front of FS Report (recommendation in FS is not EPA's preferred remedy; EPA policy is for EPA to perform risk assessments)

Proposed Plan, dated August 1992

August 26, 1992 letter from NYSDEC to EPA concurring on Proposed Plan

August 31, 1992 letter from EPA to Tom Morris of IBM, approving Environmental Review Report

APPENDIX IV STATE LETTER OF CONCURRENCE

APPENDIX V RESPONSIVENESS SUMMARY