Lindley South Landfill STEUBEN COUNTY, NEW YORK

Site Management Plan

NYSDEC Site Number: 8-51-008

Prepared for: Steuben County Department of Public Works 3 East Pulteney Square Bath, New York 14810

Prepared by:

Barton & Loguidice, P.C. Engineers • Environmental Scientists • Planners • Landscape Designers 290 Elwood Davis Road P. O. Box 3107 Syracuse, New York 13220

Revisions to Final Approved Site Management Plan:

Revision #	Submitted Date	Summary of Revision	DEC Approval Date
	· · · · ·		



Engineers • Environmental Scientists • Planners • Landscape Architects 290 Elwood Davis Road, Box 3107, Syracuse, New York 13220

R recycled paper

Table of Contents

<u>Sectio</u>	<u>n</u>	Pa	<u>ge</u>
1.0	Introdu 1.1	uction and Description of Remedial Program Introduction 1.1.1 General 1.1.2 Purpose 1.1.3 Revisions	1 1 2
	1.2	Site Background 1.2.1 Site Location and Description 1.2.2 Site History 1.2.3 Geologic Condition	5 5
	1.3 1.4	Summary of Remedial Investigation Findings Summary of Remedial Actions	
2.0	Engine 2.1	eering and Institutional Control Plan Introduction 2.1.1 General 2.1.2 Purpose	10 10
	2.2	 2.1.2 Purpose Engineering Controls 2.2.1 Engineering Control Systems 2.2.1.1 Engineered Cap 2.2.1.2 Leachate Collection 	11 11 11
	2.3 2.4	Institutional Controls Inspections and Notifications 2.4.1 Inspections 2.4.2 Notifications	12 14 14
	2.5	Contingency Plan	16
3.0	Site M	Ionitoring Plan	17
4.0	Opera 4.1	tion and Maintenance Plan Excavation Work Plan	18 18
5.0	Inspec 5.1 5.2 5.3 5.4	ctions, Reporting and Certifications Site Inspections 5.1.1 Inspection Frequency 5.1.2 Inspection Forms, Sampling Data, and Maintenance Reports 5.1.3 Evaluation of Records and Reporting Certification of Engineering and Institutional Controls Periodic Review Report Corrective Measures Plan	19 19 19 19 20 23

.

Table of Contents – Continued

List of Appendices

Appendix A – Declaration of Covenants and Restrictions

Appendix B - Post-Closure Monitoring and Maintenance Operations Manual

Appendix C – Excavation Work Plan

Appendix D – Landfill Inspection Log

List of Figures

Figure 1 – Site Plan

1.0 Introduction and Description of Remedial Program

1.1 Introduction

This document is required as an element of the remedial program at closed Lindley South Landfill (hereinafter referred to as the "Site") under the New York State (NYS) Inactive Hazardous Waste Disposal Site Remedial Program administered by New York State Department of Environmental Conservation (NYSDEC). The site was remediated in accordance with:

- Order on Consent Index B8-0376-91-06 4/7/1995 Remedial Program w/IRM
- Order on Consent Index B8-1575-86-07 7/30/1986 Leachate
 Collection System

1.1.1 General

Steuben County entered into an Order on Consent with the NYSDEC to remediate an approximate 16 acre property located in Lindley, Steuben County, New York. This Order on Consent required the Remedial Party, Steuben County, to investigate and remediate contaminated media at the site. A figure showing the site location and boundaries of the Site is provided in Figure 1. The boundaries of the site are more fully described in the metes and bounds site description that is part of the Declaration of Covenants and Restrictions, which is included in Appendix A.

This Site Management Plan (SMP) was prepared to manage remaining contamination at the site until the Environmental Deed restriction is extinguished in accordance with ECL Article 71, Title 36. All reports associated with the site can be viewed by contacting the NYSDEC or its successor agency managing environmental issues in New York State.

This SMP was prepared by Barton & Loguidice, P.C., on behalf of Steuben County, in accordance with the requirements in NYSDEC DER-10 Technical Guidance for Site Investigation and Remediation, dated May 3, 2010, and the guidelines provided by NYSDEC. This SMP addresses the means for implementing the Institutional Controls (ICs) and Engineering Controls (ECs) that are required by the environmental deed restriction for the site.

1.1.2 Purpose

Engineering Controls have been incorporated into the site remedy to control exposure to remaining contamination during the use of the site to ensure protection of public health and the environment. An environmental deed restriction granted to the NYSDEC, and recorded with the Steuben County Clerk, will require compliance with this SMP and all ECs and ICs placed on the site. The ICs place restrictions on site use, and mandate operation, maintenance, monitoring and reporting measures for all ECs and ICs. This SMP specifies the methods necessary to ensure compliance with all ECs and ICs required by the environmental deed restriction for contamination that remains at the site. This plan has been approved by the NYSDEC, and compliance with this plan is required by the grantor of the environmental deed restriction and the grantor's successors and assigns. This SMP may only be revised with the written approval of the NYSDEC.

This SMP provides a detailed description of all procedures required to manage remaining contamination at the site after completion of the Remedial Action, including: (1) implementation and management of all Engineering and Institutional Controls; (2) media monitoring; (3) operation and maintenance of all treatment, collection, containment, or recovery systems; (4) performance of periodic inspections, certification of results, and submittal of Periodic Review Reports; and (5) defining criteria for termination of treatment system operations.

To address these needs, this SMP includes three plans: (1) an Engineering and Institutional Control Plan for implementation and management of EC/ICs; (2) a Monitoring Plan for implementation of Site Monitoring; (3) an Operation and Maintenance Plan for implementation of remedial collection, containment, treatment, and recovery systems.

This plan also includes a description of Periodic Review Reports for the periodic submittal of data, information, recommendations, and certifications to NYSDEC.

It is important to note that:

 This SMP details the site-specific implementation procedures that are required by the environmental deed restriction. Failure to properly implement the SMP is a violation of the environmental deed restriction, a violation of Environmental Conservation Law, 6NYCRR Part 375 and the Order on Consent identified above for the site, and thereby subject to applicable penalties.

1.1.3 Revisions

Revisions to this plan will be proposed in writing to the NYSDEC's project manager. In accordance with the environmental deed restriction for the site, the NYSDEC will provide a notice of any approved changes to the SMP, and append these notices to the SMP that is retained in its files.

1.2 Site Background

The Lindley Landfill has been owned by the Town of Lindley and operated by the Steuben County Highway Department since initial operations began in 1977. The landfill was operated until 1983, at which time operations were shifted to the Lindley North landfill. During its operating history, the Lindley site accepted both municipal and industrial wastes from within Steuben County. These industrial wastes included lead dusts and other inorganics from Corning Glass Works.

During the site's operating period, leachate (surface water or groundwater which is contaminated from contact with landfill waste) problems were evident and leachate was observed flowing to an adjacent stream which serves as a tributary to Glendening Creek. Beginning in 1978, efforts were undertaken to limit groundwater flow onto the site. In 1984 a study was initiated by Steuben County to identified methods of leachate control at the site. In 1986 a leachate collection system was installed to control leachate outbreaks from the landfill. This system consisted of the installation of a leachate collection trench within the waste mass, along with a 5,000 gallon leachate storage tank. Two pre- existing groundwater interceptor drains outside the limits of the waste were also connected to the collection system and tank. In 1988 and 1989 additional groundwater and leachate studies were performed. These studies concluded that several thousand gallons of groundwater flow into the site daily, contacting the waste and producing leachate. In 1989, Steuben County installed additional groundwater diversion systems around the south and west sides of the site in order to reduce leachate generation.

In 1989 and 1990 Phase I and Phase II investigations were performed at the site on behalf of the NYSDEC. The Phase II investigation identified impacts to groundwater and nearby surface water from the site.

1.2.1 Site Location and Description

The site is located in the Lindley, Steuben County, New York. The site is an approximately 16-acre area bounded by Gibson Road to the north (see Figure 1) and surrounded by woodlands to the north, east and west. The boundaries of the site are more fully described in Appendix A.

1.2.2 Site History

Since initial landfill operations began the Site has been owned by the Town of Lindley and operated by the Steuben County Highway Department. Municipal solid wastes were accepted from eleven (11) towns within Steuben County.

In January 1989 a Phase I investigation report was completed by Engineering-Science on behalf of NYSDEC, which summarized site conditions and assessed the hazard to human health and the environmental caused by the existing condition of the site. The Phase I Investigation recommended a Phase II investigation to be completed.

From June 1989 to April 1990, a Phase II investigation was conducted by NYSDEC. The Phase II investigation confirmed that hazardous waste was disposed of at the site and that contaminants were migrating from the site. The Phase II investigation indicated that the primary source of local groundwater and surface water contamination was due to the large volume of leachate generated within the landfill mass. The landfill had an existing retro-fitted leachate collection system, but it was only estimated to collect half of the leachate generated by the landfill.

The County conducted an Interim Remedial Measure (IRM) to better manage leachate generation at the Site. An IRM Work Plan was approved in October 1995 and the IRM Design was approved in September 1996. The County subsequently installed a 75,000-gallon leachate storage tank and loading facility. Leachate generated at the Site is treated at the Steuben County Wastewater Treatment Plant located at the New Bath Landfill facility in Bath New York.

A Remedial Investigation/ Feasibility Study (RI/FS) was completed by C&S Engineers, Inc. on behalf of Steuben County was completed from November 1995 through April 1996.

Based on the findings associated with the RI/FS, in February 1998 the Department issued a Record of Decision for the Site which selected a containment remedy for the Site. The major components of the ROD include:

- Continued removal and off-site treatment of leachate using the existing leachate collection storage systems.
- Design and construction of a low permeability cover system meeting 6 NYCRR Part 360 requirements to significantly reduce infiltration into the wastes.
- A long term operation and maintenance plan for the cover system.
- A long term monitoring plan which will allow the effectiveness of the remedy to be monitored.
- A contingency for the future design and construction of additional groundwater controls, if the cover system alone does not reduce leachate generation rates to manageable levels.
- Deed restrictions will be pursued to prevent future uses of the site which are incompatible with the selected remedy.

1.2.3 Geologic Condition

The overburden (above bedrock) soils in the vicinity of the site consist of a thin topsoil, sand, and silt layer over a relatively thick layer (extending 45-75 feet below grade) of glacial till. The glacial till unit is relatively compact and contains silt, clay, embedded gravel, cobbles, and numerous boulders. The till in the area overlays bedrock which typically consists of interbedded sandstone and shale.

The site monitoring network consists of one (1) bedrock monitoring well and six (6) overburden monitoring wells. The overburden groundwater is typically encountered within fifteen (15) feet below the ground surface. Based upon groundwater elevations obtained from the monitoring wells located in and around the landfills on both the north and south sides of Gibson road, overburden groundwater generally follows the topography of the land and converges toward a tributary of Glendening Creek. On the south side of Gibson road (at the site), overburden groundwater flow is generally to the east and northeast. On the north side of Gibson road, overburden groundwater is generally toward the south and east. The groundwater elevations in the bedrock wells indicate that a minor downward vertical hydraulic gradient is present at the site.

1.3 <u>Summary of Remedial Investigation Findings</u>

A Remedial Investigation (RI) was performed to characterize the nature and extent of contamination at the site. The RI activities consisted of the following:

Soil borings and test trenching to more precisely define the limits of waste;

- Investigations to determine potential for landfill gas migration and gas hazard potential;
- Groundwater monitoring well installation and sampling;
- Residential drinking water well sampling;
- Environmental sampling of surface water and sediment in runoff ditches and adjacent stream (the tributary to Glendening Creek);
- A health risk assessment of site groundwater contaminant migration;
- A Fish and Wildlife Impact Analysis to evaluate potential site impacts to the surrounding ecology; and
- Geophysical investigations and excavations to investigate reported disposal of drums.

1.4 <u>Summary of Remedial Actions</u>

The site was remediated in accordance with the NYSDEC-approved Interim Remedial Measure Work Plan dated September 1995 and the Engineered Cap Engineering Report and QA/QC Plan dated December 1997.

The following is a summary of the Remedial Remedy performed at the site:

The elements of the proposed remedy are as follows:

- 1. Continued removal and off-site treatment of leachate using the existing leachate collection and storage systems.
- Design and construction of a low permeability cover system in accordance with 6NYCRR Part 360, which will also include gas venting systems.

- A long term Operation and Maintenance (O&M) plan will be prepared (See Appendix B). O&M activities anticipated include periodic mowing of vegetation and repairs of the cover, gas vent, etc. as necessary.
- 4. A long term monitoring program will be instituted. This program will allow the effectiveness of the selected remedy to be monitored and will be a component of the operation and maintenance for the site. On-site and adjacent groundwater will be periodically sampled. In addition, a homeowner well sampling program will be implemented.
- 5 Monitoring of leachate generation rates will be performed after completion of the cover system. It is expected that leachate rates will be reduced to manageable levels after the cover system is completed. However, should leachate generation continue at unmanageable rates, additional groundwater controls will be reevaluated. This contingency would allow for the future design and construction of additional groundwater controls, if necessary, to ensure the remedy selected will function effectively.
- 6. Deed restrictions will be pursued to prevent future uses of the site which are incompatible with the proposed remedy.
- 7. Installation and maintenance of a perimeter security fence to limit Site access.

2.0 Engineering and Institutional Control Plan

2.1 Introduction

2.1.1 General

Since remaining contamination leachate exists at the site, Engineering Controls and Institutional Controls (EC/ICs) are required to protect human health and the environment. This Engineering and Institutional Control Plan describes the procedures for the implementation and management of all EC/ICs at the site. The EC/IC Plan is one component of the SMP and is subject to revision by NYSDEC.

2.1.2 Purpose

This plan provides:

- A description of all EC/ICs on the site;
- The basic implementation and intended role of each EC/IC;
- A description of the key components of the ICs set forth in the environmental deed restriction;
- A description of the features to be evaluated during each required inspection and periodic review;
- A description of plans and procedures to be followed for implementation of EC/ICs, and
- Any other provisions necessary to identify or establish methods for implementing the EC/ICs required by the site remedy, as determined by the NYSDEC.

2.2 Engineering Controls

2.2.1 Engineering Control Systems

2.2.1.1 Engineered Cap

Exposure to remaining contamination at the site is prevented by an engineered cap cover system placed over the landfill mass. The cap system is comprised of various layers of soil and geosynthetic materials. The cap system has a nominal thickness of 2.5 feet and consists of the following:

- Six inch topsoil layer with established vegetation;
- 24 inch clay barrier protection layer;
- Geocomposite drainage layer;
- Geomembrane 40-mil textured geosynthetic liner barrier layer; and
- Nonwoven geotextile fabric.

Other cap substructures consist of:

- Granular gas venting trenches; and
- Existing intermediate cover.

Procedures for the inspection and maintenance of this cover are provided in the Post-Closure Monitoring and Maintenance Operations Manual included as Appendix B of this SMP.

2.2.1.2 Leachate Collection

An IRM consisting of additional leachate storage and handling facilities. An IRM workplan was approved by the NYSDEC in October 1995, and the IRM design was approved in September 1996. Construction of the new 75,000 gallon leachate storage tank and loading facility was completed and the new leachate storage and handling facilities are operational. Leachate is currently sampled on an annual basis. Leachate generation quantities are maintained by the County. Leachate is currently manifested and hauled to the County Wastewater Treatment Plant located at the New Bath Landfill Facility, Bath, New York for treatment.

2.3 Institutional Controls

A series of Institutional Controls is required by the ROD to: (1) implement, maintain and monitor Engineering Control systems; (2) prevent future exposure to remaining contamination by controlling disturbances of the subsurface contamination; and, (3) limit the use and development of the site per a deed restriction. Adherence to these Institutional Controls on the site is required by the Environmental Deed restriction and will be implemented under this Site Management Plan. These Institutional Controls are:

- Long-term operation and maintenance plan for the cover system
- Long-term monitoring plan which will allow the effectiveness of the remedy to be monitored;
- A contingency for the future design and construction of additional groundwater controls, if the cover system alone does not reduce leachate generation rates at manageable levels.
- Deed restrictions will be pursued to prevent future uses of the site which are incompatible with the selected remedy. Compliance with

the Environmental Deed restriction and this SMP by the Grantor and the Grantor's successors and assigns;

- All Engineering Controls must be operated and maintained as specified in this SMP;
- All Engineering Controls on the Controlled Property must be inspected at a frequency and in a manner defined in the SMP.
- Groundwater and other environmental or public health monitoring must be performed as defined in this SMP;
- Data and information pertinent to Site Management of the Controlled Property must be reported at the frequency and in a manner defined in this SMP.

Institutional Controls identified in the Environmental Deed restriction may not be discontinued without an amendment to or extinguishment of the Environmental Deed restriction.

The site has a series of Institutional Controls in the form of site restrictions. Adherence to these Institutional Controls is required by the Environmental Deed restriction. Site restrictions that apply to the Controlled Property are:

- All future activities on the property that will disturb remaining contaminated material must be conducted in accordance with this SMP;
- The use of the groundwater underlying the property is prohibited without treatment rendering it safe for intended use.

2.4 Inspections and Notifications

2.4.1 Inspections

Inspections of all remedial components installed at the site will be conducted at the frequency specified in the SMP Monitoring Plan schedule. A comprehensive site-wide inspection will be conducted annually, regardless of the frequency of the Periodic Review Report. The inspections will be conducted separately from the site environmental monitoring activities. The inspections will determine and document the following:

- Whether Engineering Controls continue to perform as designed;
- If these controls continue to be protective of human health and the environment;
- Compliance with requirements of this SMP and the Environmental Deed restriction;
- Achievement of remedial performance criteria;
- If site records are complete and up to date; and
- Changes, or needed changes, to the remedial or monitoring system.

Inspections will be conducted in accordance with the procedures set forth in Section 3 of the Post-Closure Monitoring and Maintenance Operation Manual (Appendix B). The reporting requirements are outlined in the Periodic Review Reporting section of this plan (Section 5).

If an emergency, such as a natural disaster or an unforeseen failure of any of the ECs occurs, an inspection of the site will be conducted within 5 days of the event to verify the effectiveness of the EC/ICs implemented at the site by a qualified environmental professional as determined by NYSDEC.

2.4.2 Notifications

Notifications will be submitted by the property owner to the NYSDEC as needed for the following reasons:

- 60-day advance notice of any proposed changes in site use that are required under the terms of the Order on Consent.
- Notice within 48-hours of any damage or defect to the foundations structures that reduces or has the potential to reduce the effectiveness of other Engineering Controls and likewise any action to be taken to mitigate the damage or defect.
- Verbal notice by noon of the following day of any emergency, such as a fire, flood, or earthquake that reduces or has the potential to reduce the effectiveness of Engineering Controls in place at the site, with written confirmation within 7 days that includes a summary of actions taken, or to be taken, and the potential impact to the environment and the public.
- Follow-up status reports on actions taken to respond to any emergency event requiring ongoing responsive action shall be submitted to the NYSDEC within 45 days and shall describe and document actions taken to restore the effectiveness of the ECs.

Any change in the ownership of the site or the responsibility for implementing this SMP will include the following notifications:

- At least 60 days prior to the change, the NYSDEC will be notified in writing of the proposed change. This will include a certification that the prospective purchaser has been provided with a copy of the Order on Consent, and all approved work plans and reports, including this SMP
- Within 15 days after the transfer of all or part of the site, the new owner's name, contact representative, and contact information will be confirmed in writing.

2.5 <u>Contingency Plan</u>

A Contingency Plan is included as Section 4 of the Post-Closure Monitoring and Maintenance Operation Manual (Appendix B). Emergency contacts for the Site are included below:

Emergency Contacts	
Steve Orcutt - Assistant Commissioner, Solid Waste and Recycling	(607) 664-2460
Rich Bills - Assistant Landfill Supervisor	(607) 776-2361
NYSDEC Region 8	585-226-2466
NYSDEC Spill Hotline	800-457-7362
NYSDOH	(585) 423-8014

3.0 Site Monitoring Plan

The Post-Closure Environmental Monitoring Plan is included as Section 2 of of the Post-Closure Monitoring and Maintenance Operation Manual (Appendix B).

The current sampling frequency and requirements are included in the following schedule

Lindley South Landfill Post-Closure Sampling Schedule (2009 - 2020)					
Year	First Quarter	Second Quarter	Third Quarter	Fourth Quarter	
2009	-	R	R	В	
2010	SNR	R	SNR	SNR	
2011	SNR	SNR	SNR	R	
2012	SNR	В	SNR	SNR	
2013	SNR	SNR	SNR	R	
2014	SNR	R	SNR	SNR	
2015	SNR	SNR	SNR	В	
2016	SNR	R	SNR	SNR	
2017	SNR	SNR	SNR	R	
2018	SNR	В	SNR	SNR	
2019	SNR	SNR	SNR	R	
2020	SNR	R	SNR	SNR	

Notes:

R = 1998 Part 360 Routine Parameters

B = 1998 Part 360 Baseline Parameters

SNR = Sampling Not Required

The proposed sampling schedule applies to all of the current monitoring locations: MW-1, MW-2S, MW-2D, MW-3, MW-4, GW-1, MW-4, SW-1, SW-2, SW-4 and SW-7.

Sampling events will include perimeter gas monitoring and landfill inspections. Site perimeter gas monitoring will occur on a quarterly basis until 2012 and then will be completed on an annual basis. There are a total of ten (10) permanent perimeter gas monitoring points (GP-1-GP-10). The proposed sampling schedule may be modified at any time by NYSDEC.

All analytical data will be submitted in an approved Electronic Deliverable Data (EDD) format into the NYSDEC EQuIS Database.

4.0 Operation and Maintenance Plan

The Post-Closure Maintenance Operations Plan is included as Section 3 of the Post-Closure Monitoring and Maintenance Operation Manual (Appendix B).

4.1 Excavation Work Plan

Since the Post-Closure Monitoring and Maintenance Operations Manual was completed and approved by NYSDEC, an Excavation Work Plan has been completed and is included in Appendix C. The Excavation Work Plan identifies procedure to be followed in case the need arises to excavate soils at the Site (i.e. cap repairs, maintenance activities).

5.0 Inspections, Reporting and Certifications

5.1 Site Inspections

5.1.1 Inspection Frequency

At a minimum, a site-wide inspection will be conducted annually. Inspections of remedial components will also be conducted when a breakdown of any treatment system component has occurred or whenever a severe condition has taken place, such as an erosion or flooding event that may affect the ECs.

5.1.2 Inspection Forms, Sampling Data, and Maintenance Reports

All inspections and monitoring events will be recorded on the appropriate forms for their respective system (i.e. field data forms, chain of custody records, gas monitoring logs). Additionally, a general site-wide inspection form will be completed during the site-wide inspection (see Appendix B Section 3). These forms are subject to NYSDEC revision.

All applicable inspection forms and other records, including all media sampling data and system maintenance reports, generated for the site during the reporting period will be provided in electronic format in the Periodic Review Report.

5.1.3 Evaluation of Records and Reporting

The results of the inspection and site monitoring data will be evaluated as part of the EC/IC certification to confirm that the:

- EC/ICs are in place, are performing properly, and remain effective;
- The Monitoring Plan is being implemented;

- Operation and maintenance activities are being conducted properly; and, based on the above items; and
- The site remedy continues to be protective of public health and the environment and is performing as designed.

5.2 <u>Certification of Engineering and Institutional Controls</u>

After the last inspection of the reporting period, a Professional Engineer licensed to practice in New York State will prepare the following certification:

For each institutional or engineering control identified for the site, I certify that all of the following statements are true:

- The inspection of the site to confirm the effectiveness of the institutional and engineering controls required by the remedial program was performed under my direction;
- The institutional control and/or engineering control employed at this site is unchanged from the date the control was put in place, or last approved by the Department;
- Nothing has occurred that would impair the ability of the control to protect the public health and environment;
- Nothing has occurred that would constitute a violation or failure to comply with any site management plan for this control;
- Access to the site will continue to be provided to the Department to evaluate the remedy, including access to evaluate the continued maintenance of this control;
- If a financial assurance mechanism is required under the oversight document for the site, the mechanism remains

valid and sufficient for the intended purpose under the document;

- Use of the site is compliant with the environmental deed restriction;
- The engineering control systems are performing as designed and are effective;
- To the best of my knowledge and belief, the work and conclusions described in this certification are in accordance with the requirements of the site remedial program; and
- The information presented in this report is accurate and complete.
- I certify that all information and statements in this certification form are true. I understand that a false statement made herein is punishable as a Class "A" misdemeanor, pursuant to Section 210.45 of the Penal Law.
 I, [name], of [business address], am certifying as Owner's Designated Site Representative I have been authorized and designated by all site owners to sign this certification for the site.

The signed certification will be included in the Periodic Review Report described below.

For each institutional identified for the site, I certify that all of the following statements are true:

 The institutional control employed at this site is unchanged from the date the control was put in place, or last approved by the Department;

- Nothing has occurred that would impair the ability of the control to protect the public health and environment;
- Nothing has occurred that would constitute a violation or failure to comply with any site management plan for this control;
- Access to the site will continue to be provided to the Department to evaluate the remedy, including access to evaluate the continued maintenance of this control;
- If a financial assurance mechanism is required under the oversight document for the site, the mechanism remains valid and sufficient for the intended purpose under the document;
- Use of the site is compliant with the environmental deed restriction.
- The information presented in this report is accurate and complete.
- I certify that all information and statements in this certification form are true. I understand that a false statement made herein is punishable as a Class "A" misdemeanor, pursuant to Section 210.45 of the Penal Law.
 I, [name], of [business address], am certifying as Owner's Designated Site Representative and I have been authorized and designated by all site owners to sign this certification for the site.

5.3 Periodic Review Report

A Periodic Review Report will be submitted to the Department every year, beginning 18 months after the Certificate of Completion or equivalent document, e.g., Satisfactory Completion Letter, No Further Action Letter, etc., is issued. In the event that the site is subdivided into separate parcels with different ownership, a single Periodic Review Report will be prepared that addresses the site described in Appendix A (Declaration of Covenants and Restrictions). The report will be prepared in accordance with NYSDEC DER-10 and submitted within 45 days of the end of each certification period. Media sampling results will also incorporated into the Periodic Review Report. The report will include:

- Identification, assessment and certification of all ECs/ICs required by the remedy for the site;
- Results of the required annual site inspections and severe condition inspections, if applicable;
- All applicable inspection forms and other records generated for the site during the reporting period in electronic format;
- All leachate generation and hauling records during the reporting period;
- Data summary tables and graphical representations of contaminants of concern by media, which include a listing of all compounds analyzed, along with the applicable standards, with all exceedances highlighted. These will include a presentation of past data as part of an evaluation of contaminant concentration trends;
- Results of all analyses, copies of all laboratory data sheets, and the required laboratory data deliverables for all samples collected during the reporting period will be submitted electronically in a NYSDEC-approved format;

- A site evaluation, which includes the following:
 - The compliance of the remedy with the requirements of the site-specific ROD;
 - The operation and the effectiveness of all treatment units, etc., including identification of any needed repairs or modifications;
 - Any new conclusions or observations regarding site contamination based on inspections or data generated by the Monitoring Plan for the media being monitored;
 - An annual overview of the leachate collection and transportation including a review of the annual leachate generation compared to historical data.
 - Recommendations regarding any necessary changes to the remedy and/or Monitoring Plan; and
 - The overall performance and effectiveness of the remedy.

The Periodic Review Report will be submitted, in hard-copy format, to the NYSDEC Central Office.

5.4 Corrective Measures Plan

If any component of the remedy is found to have failed, or if the periodic certification cannot be provided due to the failure of an institutional or engineering control, a corrective measures plan will be submitted to the NYSDEC for approval. This plan will explain the failure and provide the details and schedule for performing work necessary to correct the failure. Unless an emergency condition exists, no work will be performed pursuant to the corrective measures plan until it is approved by the NYSDEC.

Appendix A

Declaration of Covenants and Restrictions

Judith M. Hunter, County Clerk **3 East Pulteney Square** Bath, NY 14810 (607) 664-2564

Steuben County Clerk Recording Cover Sheet

Received From : STEVE ORCUTT

· •

Return To: STEVE ORCUTT **PUBLIC WORKS**

> Mothed Detu

		Method Returned : COURIER
First GRANTOR		
STEUBEN COUNTY		
First GRANTEE		
	**************************************	· .
Index Type : Deeds		
Book: 2433	Page: 1	
Type of Instrument : Dec	laration	
Type of Transaction : Mis	sc Deed Doc - No Fee - No	
Tp584 Recording Fee :	\$0.00	
Recording Pages :	5	
Recording Pages .		· · · · ·
•••••	Reco	rded Information
		State of New York
		County of Steuben
		I hereby certify that the within and foregoing was
		recorded in the Clerk's office for Steuben County, New York
		On (Recorded Date) : 05/03/2013
		At (Recorded Time) : 11:46:37 AM
		Jusite M. Thuster
Doc ID - 006658170005		Judith M. Hunter, County Clerk

This sheet constitutes the Clerks endorsement required by Section 319 of Real Property Law of the State of New York and conforms to Steuben County Local Law # 10 of 2003. DO NOT DETACH

DECLARATION of COVENANTS and RESTRICTIONS

THIS COVENANT is made the 36^{+} day of 20 20 3 by Steuben County, a municipality of the State of New York and having an office for the transaction of business at 3 E. Pulteney Square, Bath, NY 14810.

WHEREAS, Lindley Landfill is the subject of an Order on Consent executed by Steuben County as part of the New York State Department of Environmental Conservation's (the "Department's) State Superfund Program, namely that parcel of real property located on 8676 Gibson Rd. in the Town of Lindley, County of Steuben, State of New York, which is part of lands conveyed by Town of Lindley to County of Steuben by deed dated October 8, 1996 and recorded in the Steuben County Clerk's Office in Liber and Page 1506 and 274, and being more particularly described in Appendix "A," attached to this declaration and made a part hereof, and hereinafter referred to as "the Property"; and

WHEREAS, the Department approved a remedy to eliminate or mitigate all significant threats to the environment presented by the contamination disposed at the Property and such remedy requires that the Property be subject to restrictive covenants.

NOW, THEREFORE, Steuben County, for itself and its successors and/or assigns, covenants that:

First, the Property subject to this Declaration of Covenants and Restrictions is as shown on a map attached to this declaration as Appendix "B" and made a part hereof.

Second, unless prior written approval by the Department or, if the Department shall no longer exist, any New York State agency or agencies subsequently created to protect the environment of the State and the health of the State's citizens, hereinafter referred to as "the Relevant Agency," is first obtained, where contamination remains at the Property subject to the provisions of the Site Management Plan ("SMP"), there shall be no construction, use or occupancy of the Property that results in the disturbance or excavation of the Property which threatens the integrity of the engineering controls or which results in unacceptable human exposure to contaminated soils.

Third, the owner of the Property shall not disturb, remove, or otherwise interfere with the installation, use, operation, and maintenance of engineering controls required for the Remedy, which are described in the SMP, unless in each instance the owner first obtains a written waiver of such prohibition from the Department or Relevant Agency.

Fourth, the owner of the Property shall prohibit the Property from ever being used for purposes other than for its current use as a landfill without the express written waiver of such prohibition by the Department or Relevant Agency. Fifth, the owner of the Property shall prohibit the use of the groundwater underlying the Property without treatment rendering it safe for drinking water or industrial purposes, as appropriate, unless the user first obtains permission to do so from the Department or Relevant Agency.

Sixth, the owner of the Property shall provide a periodic certification, prepared and submitted by a professional engineer or environmental professional acceptable to the Department or Relevant Agency, which will certify that the institutional and engineering controls put in place are unchanged from the previous certification, comply with the SMP, and have not been impaired.

Seventh, the owner of the Property shall continue in full force and effect any institutional and engineering controls required for the Remedy and maintain such controls, unless the owner first obtains permission to discontinue such controls from the Department or Relevant Agency, in compliance with the approved SMP, which is incorporated and made enforceable hereto, subject to modifications as approved by the Department or Relevant Agency.

Eighth, this Declaration is and shall be deemed a covenant that shall run with the land and shall be binding upon all future owners of the Property, and shall provide that the owner and its successors and assigns consent to enforcement by the Department or Relevant Agency of the prohibitions and restrictions that the Order on Consent requires to be recorded, and hereby covenant not to contest the authority of the Department or Relevant Agency to seek enforcement.

Ninth, any deed of conveyance of the Property, or any portion thereof, shall recite, unless the Department or Relevant Agency has consented to the termination of such covenants and restrictions, that said conveyance is subject to this Declaration of Covenants and Restrictions.

IN WITNESS WHEREOF, the undersigned has executed this instrument the day written below.

Print Name:

Title: COUNTY AdmissTRATE Date: 4/30/2013

)

STATE OF NEW YORK

) s.s.:

On the 30^{+1} day of <u>APPIL</u>, in the year 2013 before me, the undersigned, personally appeared <u>APPIL</u>, personally known to me or proved to me on the basis of satisfactory evidence to be the individual(s) whose name is (are) subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their capacity(ies), and that by his/her/their signature(s) on the instrument, the individual(s), or the person upon behalf of which the individual(s) acted, executed the instrument.

Jonne Duna

Notary Public State of New York

YVONNE ERWAY Notary Public, State of New York Registration #01ER6153706 Certified in Steuben County Commission expires: October 16, 20_14

SUGGESTED DEED DESCRIPTION

LANDS OF COUNTY OF STEUBEN

ALL THAT TRACT OR PARCEL OF LAND situate in the Town of Lindley, Township 1 Range 2, Portion of the Anthony Tract and the Middle Ridge Tract, County of Steuben and State of New York bounded and described as follows:

Beginning at a point in the centerline of Gibson Road on the east line of Watterson as recorded in Liber 2196 Page 29;

Thence the following courses along the centerline of Gibson Road:

South 85°29'20" East - 35.91 feet to a point'

South 77°12'44" East – 1463.31 feet to a point;

South 79°36'45" East – 105.77 feet to a point;

South 84°24'33" East – 116.98 feet to a point on the west line of Smith as recorded in Liber 1825 Page 271;


Thence South 11°06'39" West along the west line of said Smith a distance of 24.62 feet to an iron pipe and continuing along the same above described course a distance of 386.67 feet for a total distance of 411.29 feet to an iron pin;

Thence North 79°17'04" West along the north line of Wagner and Schroeder as recorded in Liber 1321 Page 150 a distance of 1721.20 feet to an iron pipe;

Thence North 11°11'17" East along the east line of said Watterson a distance of 423.77 feet to an iron pipe and continuing along the same above described course a distance of 25.50 feet for a total distance of 449.27 feet to the point of beginning. Comprising an area of 16.758 acres. All as more fully shown on a survey map entitled "Plan of Lands of County of Steuben" surveyed by McConnell & Muller Land Surveyors dated July 31, 2012 as Job No. 4732.

Subject to all rights of ways and/or easements of record.

Being a portion of the premises deeded by Town of Lindley to County of Steuben dated October 8, 1996 recorded in Liber 1506 Page 274.

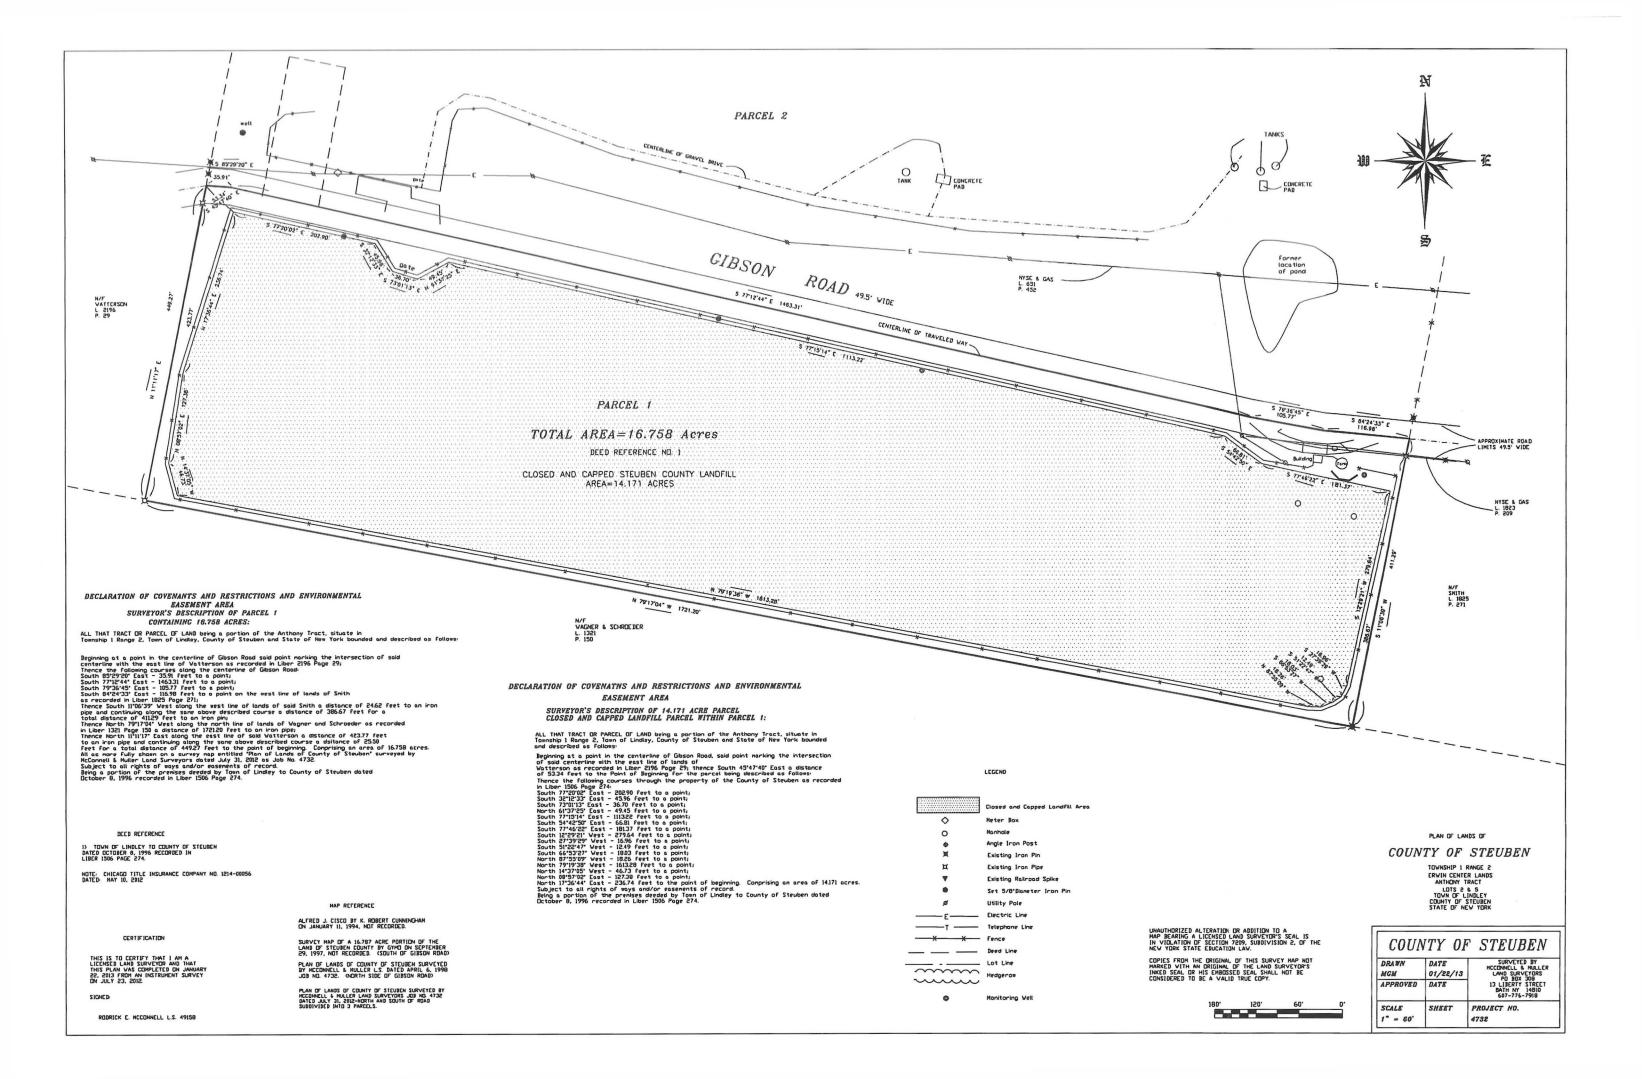

Appendix B

Post-Closure Monitoring and Maintenance Operations Manual



Engineers, Inc.

LINDLEY SOUTH LANDFILL ENGINEERED CAP SITE No. 851008 STEUBEN COUNTY, NEW YORK

Í

- in

 \square

D

POST-CLOSURE MONITORING AND MAINTENANCE OPERATIONS MANUAL

OCTOBER 1997 REVISED SEPTEMBER 1998 REVISED APRIL 1999

LINDLEY SOUTH LANDFILL ENGINEERED CAP SITE No.851008 STEUBEN COUNTY, NEW YORK

POST-CLOSURE MONITORING AND MAINTENANCE OPERATIONS MANUAL



N.

C&S Engineers, Inc. 1099 AIRPORT BOULEVARD NORTH SYRACUSE, NEW YORK 13212 (315) 455-2000

> OCTOBER 1997 REVISED SEPTEMBER 1998 REVISED APRIL 1999

LINDLEY SOUTH LANDFILL CLOSURE POST-CLOSURE MONITORING AND MAINTENANCE OPERATIONS MANUAL

Í

Ê

Ń

TABLE OF CONTENTS

SECTION 1	- INTRODUCTION			
1.1	General			
1.2	Site Description			
1.3	Site History			
SECTION 2	- POST-CLOSURE ENVIRONMENTAL MONITORING PLAN			
2.1	Introduction			
2.2	Environmental Monitoring Points 2-1			
	2.2.1 Groundwater Monitoring Wells 2-1			
	2.2.2 Surface Water Sampling Points 2-2			
	2.2.3 Landfill Gas Monitoring Points 2-2			
	2.2.4 Residential Water Well Monitoring 2-3			
2.3	General Field Sampling Equipment			
2.4	Sampling Protocols and Methods of Sample Collection 2-4			
	2.4.1 Groundwater Monitoring Wells 2-5			
	2.4.2 Surface Water Sampling Points 2-7			
	2.4.3 Landfill Gas Monitoring 2-8			
2.5	Field Parameters			
2.6	Sample Preservation			
2.7	Chain-of-Custody Documentation			
2.8	Sample Identification 2-12			
2.9	Analyses to be Performed 2-12			
2.10	Analytical Methodologies 2-13			
2.11	Reporting and Remedial Objective Requirements			
2.12	Contingency Water Quality Monitoring Plan 2-15			
SECTION 3	- POST-CLOSURE MAINTENANCE OPERATIONS PLAN			
3.1	General			
3.2	Site Maintenance Schedule			
3.3	Final Grades and Side Slopes 3-3			
3.4	Drainage and Erosion Control 3-3			
3.5	Vegetative Cover Maintenance			
3.6	Environmental and Facility Monitoring 3-5			
	3.6.1 Groundwater Monitoring Wells 3-5			
	3.6.2 Benchmarks 3-6			
	3.6.3 Gas Vents			
3.7	Settlement and Subsidence 3-7			

LINDLEY SOUTH LANDFILL CLOSURE POST-CLOSURE MONITORING AND MAINTENANCE OPERATIONS MANUAL

TABLE OF CONTENTS (Cont.)

SECTION 4 - CONTINGENCY PLAN

4.1	Introduction
4.2	Emergency Coordinator and Alternates 4-1
4.3	Responsibilities
	4.3.1 On-Site
	4.3.2 Off-Site
	4.3.3 Emergency Coordinator
	4.3.4 Emergency Response Team Members 4-4
4.4	Implementation of the Contingency Plan 4-5
4.5	Non-Critical Incidents 4-6
4.6	Emergency Response Procedures
	4.6.1 Notification
	4.6.2 General Information
	4.6.3 Emergency Notification List
4.7	Specific Process Control Procedures 4-7
	4.7.1 Fire
	4.7.2 Landfill Gas
	4.7.3 Structural Failure
	4.7.4 Groundwater Contamination
	4.7.5 Surface Water Contamination
	4.7.6 Odors
	4.7.7 Vectors
	4.7.8 Equipment Breakdown
4.8	Emergency Equipment
4.0	4.8.1 Location of Emergency Equipment
	4.6.1 Location of Emergency Equipment
4.0	4.8.2 Emergency Organization Drill 4-12
4.9	Evacuation Procedures 4-13
4.10	Required Reports

PAGE

LINDLEY SOUTH LANDFILL CLOSURE POST-CLOSURE MONITORING AND MAINTENANCE OPERATIONS MANUAL

TABLE OF CONTENTS

(Cont.)

FIGURES

FIGURE 1 - Existing Site Plan
FIGURE 2 - Environmental Monitoring Plan
FIGURE 2A - Landfill Gas Monitoring Plan
FIGURE 3 - Residential Water Well Property Locations

APPENDICES

APPENDIX A - Boring Logs
Health & Safety Plan Notification of Applicability
Health & Safety Plan
APPENDIX B - Suggested Report Forms
APPENDIX C - Sampling, Preservation, and Holding Time Criteria
APPENDIX D- Part 360 Expanded, Baseline, and Routine Parameter Lists;
Class GA and Class C Water Quality Standards; and Historical

Analytical Data

SECTION 1

SECTION 1

INTRODUCTION

1.1 General

This Post-Closure Landfill Monitoring and Maintenance Operations Manual has been prepared consistent with the requirements established in 6NYCRR Part 360-2.15(i)(7). This manual describes the post-closure activities and procedures that should be utilized by landfill personnel to provide that the facility is maintained with minimal environmental impacts. As such, the manual contains, in addition to this introductory section, the following:

Section 2 - Post-Closure Environmental Monitoring Plan: includes details on the duration and frequency of the post-closure monitoring activities and locations of monitoring points. Additionally, this section describes the methods and procedures for sample collection, handling, analysis, and chain of custody documentation.

Section 3 - Post-Closure Maintenance Operations Plan: describes post-closure inspection and corrective action activities which should occur concurrent with the post-closure environmental monitoring program.

Section 4 - Contingency Plan: describes predetermined courses of action to be taken should potentially harmful or environmentally threatening situations occur during the closure and post-closure maintenance of the landfill.

The procedures included within these sections shall be performed on a regular basis so that the facility is maintained in an environmentally sound manner during the closure and post-closure period.

It should be noted that this Post-Closure (Environmental) Monitoring and Maintenance Operations manual is separate from the previously prepared Lindley South Landfill leachate storage and transfer station Operation and Maintenance (O&M) manual.

This Manual is generally organized to cover topics in the chronological order that will be encountered in the maintenance operation, such as development and construction of the final cover system, landfill environmental monitoring, and closure and post-closure maintenance. Personnel can refer to specific items by locating them in the Table of Contents which is organized by major topics for easy reference. Personnel shall periodically review the manual to assure conformance to the requirements established in 6NYCRR Part 360. If maintenance procedures must be modified, this Manual shall be revised to reflect the changes.

1.2 Site Description

The Lindley South Landfill, which is located on Gibson Road, in the Town of Lindley, Steuben County, is approximately 12 acres in size, with dimensions of approximately 320 feet wide (north-south) and approximately 1,650 feet long (east-west). The general area proximate to the site is rural, with adjacent properties consisting of primarily forest land and farmland. The landfill is located along the lower portion of a long sloping hillside, with surface water and groundwater generally draining to the northeast. Landfill operations are currently active at the Lindley North Landfill, which is located immediately north of the inactive Lindley South Landfill, across Gibson Road. Figure 1 is a site plan showing existing features.

1.3 Site History

The Lindley South Landfill began operations in 1977 and continued through 1983 when capacity was reached. The total quantity of fill and cover material at the Lindley South Landfill site is reported to be approximately 336,767 cubic yards. Fill at the site averages approximately 20 feet in height above the natural grade with a maximum height of 30 feet at the center of the site in the form of an east-west oriented ridge. Upon completion of the landfill operations, a 2-foot thick cap of natural material, obtained from the North Landfill area, was placed over the landfill and seeded. Although the landfill is unlined and there were no leachate collection, removal, or storage provisions incorporated into the landfill's original construction, a retrofitted leachate collection system, an intermediate cap, and a relatively complete vegetative cover are currently in-place over the Lindley South Landfill.

Since initial landfill operations began, the landfill has been owned by the Town of Lindley and operated by the Steuben County Highway Department. Municipal solid wastes were accepted from 11 towns within Steuben County while industrial wastes were previously accepted from Corning Glass Works from 1979 to 1980. In general, industrial wastes included heavy metals, such as lead and other inorganic matter, from Corning Glass Works manufacturing operations. The disposal of wastes at the site was completed with the written approval of the New York State Department of Environmental Conservation (NYSDEC) and generally in accordance with accepted practices at the time. (Cherill 1985).

Routine site inspections by the NYSDEC frequently reported leachate outbreaks flowing indirectly into a local unnamed stream (apparently the Tributary to Glendening Creek). In 1979, a local resident had complained that leachate, migrating from the landfill to a local stream, had subsequently caused adverse health impacts on farm animals, while other complaints faulted landfill leachate contamination, to the local groundwater supply, as a reason for human illnesses.

In 1983, the NYSDEC performed sampling and analysis of leachate from the landfill which identified elevated levels of zinc and sulfur. In 1984, a study was initiated by Steuben County to identify supplemental methods of leachate control at the site. The study recommended that a retrofitted leachate collection system be installed in the landfill. In 1985, samples of the leachate were collected and analyzed by General Testing Corporation, which identified detectable concentrations of aromatic and halogenated organic compounds.

In addition to the above items and the recently completed Remedial Investigation (RI), a number of other studies have been performed at the Lindley South Landfill over its history. In September 1988, H&A of New York was contracted to install three water level piezometers at the landfill in order to evaluate groundwater underflow conditions by periodic rounds of water level measurements. Water levels obtained from the piezometers indicated a groundwater flow direction to the northeast at a gradient of approximately 0.061 feet per foot. A study by Hunt Engineers and Architects, in 1989 was performed to evaluate the causes of leachate generation and provide recommend methods to reduce the volume of leachate generated.

The study concluded that approximately 2,800 gallons of groundwater flows into the landfill each day, regardless of weather conditions, and that groundwater contributes to nearly half of the leachate removed from the collection system. The study's recommendations included the installation of a groundwater control system on the south side of the landfill to reduce groundwater flow into the fill material. Dependent on the efficiency of the control system in reducing leachate generation, the study also recommended the installation of a synthetic liner cover system. Subsequent to the 1989 study, Steuben County forces installed groundwater drainage systems around the South and West sides of the site.

ZECLION 5

SECTION 2

ENVIRONMENTAL MONITORING PLAN

2.1 Introduction

This Environmental Monitoring Plan (EMP) is intended to provide information related to postclosure environmental monitoring for the Lindley South Landfill. This EMP will describe the proposed on-site and off-site monitoring including the specific monitoring points, sampling schedule, methods of sample collection, preservation analysis, documentation, and reporting. The EMP also describes conditions and schedules under which the existing and contingency water quality monitoring plans would be implemented. This EMP was prepared using 6NYCRR Part 360 <u>Solid Waste Management Facilities</u> (NYSDEC) as a guidance document as well as other information including the results of the Remedial Investigation completed by C&S in 1997. This EMP should be used to provide guidance for environmental monitoring during post-closure. The EMP should be periodically reviewed and updated in order to address revised or new regulations and requirements concerning the program.

2.2 Environmental Monitoring Points

Environmental monitoring points have been established at locations proximate to the landfill which consist of groundwater, surface water, and leachate sampling locations. These monitoring points have been established in consultation with the NYSDEC for the purpose of assessing water quality of the site and surrounding area.

2.2.1 Groundwater Monitoring Wells

The groundwater monitoring network for the Lindley South Landfill consists of 10 groundwater monitoring wells and 1 piezometer located throughout the site. Post-Closure environmental monitoring will be completed at the 7 monitoring wells listed in the following table. The location of the monitoring wells scheduled for post-closure monitoring are shown on Figure 2, while boring logs for the monitoring wells are included within Appendix A.

Well	Top of PVC	Depth to	Screen			
Location	Elevation	Well Bottom	Interval			
Shallow Monitoring Wells						
MW-1	1463.97	30.0'	10.0-30.0'			
MW-2S	1460.37	28.5'	8.0-28.0'			
MŴ-3	1486.59	25.5'	5.0-25.0'			
MW-4	1515.01	26.7'	6.0-26.0'			
GW-1	1544.44	55.4'	45.4-55.4'			
GW-4	1482.67	48.0'	32.5-47.5'			
Deep Monitoring Wells						
MW-2D	1460.08	97.0'	86.7-96.7'			

2.2.2 Surface Water Sampling Points

Post-Closure surface water monitoring will be completed at 4 locations within the nearby tributary to Glendening Creek including upstream location SW-1, immediate downstream locations SW-2 and SW-4, and a remote downstream location SW-7. The location of the surface water monitoring points are shown on Figure 2.

2.2.3 Landfill Gas Monitoring Points

During the completion of remedial investigations at the site, the presence of explosive or volatile organic compound gases was not revealed at 21 temporary subgrade explosive gas monitoring locations, due primarily to the dense and fine grained nature of the glacial till soils which surrounds and underlies the landfill waste mass. Since the means for outward gas migration at the landfill appears to be minimal, it is planned that post-closure monitoring for landfill gases be accordingly completed on a semi-annual basis along the landfill perimeter, at the ground elevation at 15 to 20 pre-staked landfill cap perimeter locations, as shown in Figure 2A.

Landfill gas monitoring will include the direct reading measurement of percent LEL(percent lower explosive limit), as well as incidental parameters including percent oxygen, carbon monoxide concentration, and hydrogen sulfide concentration, using a *GasTech Safe-T-Mate GT-400 gas meter*. Monitoring for total volatile organic vapors will also be completed, using a *Mini-Rae photoionization detector*.

2.2.4 Residential Water Well Monitoring

Historically, Steuben County has implemented an annual residential well water sampling and analysis program, on an alternating basis, for a number of local private residential wells located in the general vicinity of the Lindley South Landfill. Consistent with these previous efforts, Steuben County has indicated that an annual residential well water monitoring program will be maintained for local private residential wells in the future. Residential water well monitoring will be completed on an annual basis, as part of the Post-Closure Environmental Monitoring Program. Annual residential well water sampling will be completed on an alternating basis as determined by the County, for the residences (locations shown on Figure 3) included within the following list.

Residence	Figure 3 Location
Judy Randall (well depth $=105'$)	Α
Hammond Sly	В
Joe Hale (well depth = $176'$)	С
Terrance Rhodes (well depth $=250'$)	D
John & Pat Errington (well depth =170')	E
Dave & Nancy Fuller	F
William & Joyce Rhodes	G

Residential water well sampling will be completed for parameters included within the 6NYCRR Part 360 baseline list. Upon receipt, copies of the laboratory data will be submitted to Steuben County for distribution to the appropriate residents.

2.3 General Field Sampling Equipment

Field sampling equipment shall be manufactured of inert materials and designed to obtain samples with minimal agitation and contact with the atmosphere. The equipment shall be cleaned at the laboratory or other appropriate location and checked before use. It shall be protected during transportation to avoid contamination. Prior to sampling, all equipment shall be procured and accommodations for sample container delivery and sample shipment shall be made. The following is a list of general equipment that should be utilized during sampling events.

General Sampling Equipment:

- Chain of Custody Forms
- · Field Log Book and Field Record Sheets
- Engineers Tape and Folding Ruler with 0.01 Foot Intervals
- Face-Safety Shield, Latex Gloves and Respirators
- Tyvek Coveralls and Boots
- Conductivity Meter with Calibrations Standards
- pH and Eh meters (portable electronic); pH paper;
- Thermometer (portable Hand-Held)
- Biodegradable Phosphate-Free Detergent
- Coolers (with ice), Sample Bottles, and Aluminum Foil
- Duct and Filament Tape
- Paper Towels, Large Plastic Sheets and Decontamination Cloths
- Tap, Deionized, and Distilled Water
- Laboratory Grade Hexane
- 5 Gallon Wash Buckets

2.4 Sampling Protocols and Methods of Sample Collection

A Health and Safety Plan has been included within Appendix A for use and/or informational purposes as part of the Post-Closure Environmental Monitoring Program. Prior to initiation of the Post-Closure environmental monitoring program, a tour-introduction of the site to applicable sampling/laboratory personnel, as well as local Police and Fire Department personnel, shall be provided. Proper sample collection, preservation, handling, and analysis procedures must be followed in order to maintain sample integrity. The following protocols are designed to collect representative samples and maintain adequate QA/QC.

2.4.1 Groundwater Monitoring Wells

The monitoring wells to be sampled as part of the EMP are constructed of 2" diameter PVC riser pipe with a protective steel casing. Each of the site specific monitoring wells are presently equipped with dedicated PVC bailers. Water level elevations shall be recorded from each well location. Water elevations shall be identified for each well prior to purging and sampling. Measurements shall be taken from a point on the top of PVC riser pipe or on some other known point. The water level data shall be used to update the groundwater contour map. Water level measurements shall be obtained using an electronic measuring device. Other specific information for the well shall also be recorded. This includes the total depth of the well, distance from top of protective casing to the standing water, distance from top of protective casing to scribed mark on well casing, and surveyed land elevation. All measurements shall be taken within a 24 hour period to obtain consistent elevations and shall be recorded on the Monitoring Well Data Sheets. The procedure for measuring water levels in the monitoring wells is described below.

• Unlock and remove the well cap. Measure water level to nearest 0.01 foot with an electronic water level indicator. The water level indicator shall be decontaminated before moving to next well. The tape and cable are decontaminated by washing in a bucket of distilled water with a biodegradable, phosphate-free detergent solution, followed by a rinse with distilled water.

Standing water in the well shall be evacuated or purged prior to collecting a sample. It is reasonable to assume that removing 3 to 5 times the well volume of water in the well should replace standing water with formation water. Thus, prior to sampling, the sampling team shall purge the well by removing 3 to 5 times the well volume of water. Calculate the necessary volume of water to be removed as follows:

- Determine the length of the well from well boring logs = A (in feet).
- Measure the distance from the top of the well to the water level = B (in feet).
- Calculate the length of water column in the well = L (in feet) = A-B.
- Determine the diameter of the well = D (in inches).

Use the following equation to calculate one well volume of water:

- V = one well volume in GALLONS.
- D = diameter of well in INCHES.
- L = length of standing water in well in FEET.

 $V = D^2 * L * 0.041$

Note: The above equation factors in the conversion from inches to feet for the well diameter, cubic feet to gallons, and the constant pi (3.14). Multiply V times 3 to 5 to determine the total volume to be evacuated.

Determine the volume of water the bailer can hold. Divide the evacuation volume by the bailer volume to obtain the number of bails of water to be removed from the well. Record this on the Monitoring Well Data Sheet. Attach the polypropylene rope to the sample bailer then purge the well. A different dedicated rope shall be used for each well. After the calculated volume of water has been removed, the well shall be allowed to recover for 24 hours before samples are collected. The following procedures will be used for the subsequent collection of groundwater samples from the monitoring wells:

- 1. Prepare the Monitoring Well Data (Appendix B) and Chain-of-Custody sheets for each well. (Monitoring well logs are included within Appendix B);
- 2. Calibrate the field measurement instruments (pH, Eh, conductivity, turbidity) according to the instrument manufacturer's procedures for calibration;
- 3. Unlock and remove well cap;
- 4. Measure and record the depth to water from the top of the PVC riser pipe using a previously decontaminated electronic water level indicator;
- 5. With a dedicated PVC bailer, remove one bailer volume of well water and measure and record the initial pH, conductivity, temperature, and Eh. The bailer should be gently lowered into the well just enough to submerge the bailer below the top of the water level, and then gently remove the bailer. This procedure should be used to purge the well of at least 3 to 5 well volumes of water with the purged water discharged to a container and disposed of within leachate sump LS-3 located within the limits of the landfill liner system. This approach to well purging is used in an attempt to minimize the re-suspension of silt which may be present within the well. The 3 to 5 well volumes are computed using the calculated water volume of the well based upon the height of the column within the riser pipe and the diameter of the riser pipe. In cases where a low well volume is encountered, an additional allowance should be made for the sand pack volume of the bore hole;
- 6. If the well should go dry prior to purging the required 3 to 5 well volumes, allow an appropriate amount of time for the well to recover. If the required 3 to 5 well volumes cannot be purged from the well within a 24 hour period, due to poor well recharge proceed to sample the well within the 24 hours of initiation of well purging activities;

8.

9.

- 7. If/when expanded parameters sampling is being performed, immediately collect those samples intended for volatile, semi-volatiles, and PCB/pesticide analysis. Otherwise, remove the bailer and secure the well for sampling on the following day;
 - Collect the groundwater samples for laboratory and field parameters using the same bailer handling procedures as what was followed during well purging. If the field turbidity value is greater than 50 NTU's, it may be appropriate to additionally collect a duplicate sample(s) for soluble metals analysis;
 - If duplicate metals samples are collected for filtration and subsequent analysis of soluble metals (i.e., soluble metals of concern), proceed to filter such samples using appropriate filtration devices and membranes. The media used in the filtration should have been previously prepared by acid washing, subsequent rinsing with distilled water, and checked for neutral pH. The filtration device should be rinsed with nitric acid followed by a distilled water rinse and air dried between each use. If duplicate samples were collected for soluble metals analysis, a filter blank QC sample must be collected and analyzed for the respective routine or baseline parameter metals. When expanded parameter organic sample collection and analysis is performed, a trip blank for each day baseline parameter samples are collected, must accompany the samples in the field and must be analyzed for the respective baseline parameter organic;
- 10. Check pH of samples collected for total metals, ammonia, COD, cyanide, hardness, TKN, TOC, and phenols using pH paper to ensure that samples are preserved below a pH of 2.
- 11. Record on the Monitoring Well Data (Appendix B) and Chain-of-Custody sheets any pertinent information including sample appearance (color, odor, turbidity), adverse conditions related to the well installation, weather, needed maintenance, etc.;
- 12. Lock the well and decontaminate the sampling equipment (if necessary) which will be reused for sampling of other monitoring points, using appropriate and acceptable decontamination methods (i.e., which may include acid washing of filtration equipment, etc.).

Appendix C includes a listing of the requirements for sample containers, preservation techniques, and maximum holding times for the host of various routine, baseline, and expanded parameters.

2.4.2 Surface Water Sampling Points

Each of the surface water sampling points will be sampled by use of an intermediate sampling container (glass jar), either handheld or attached to an extension arm. The samples will be poured from the intermediate sampler into each of the sample collection bottles. The following procedures will be followed for the collection of the surface water samples:

- Prepare the Chain-of-Custody sheets for each surface water sampling points;
 Calibrate the field measurement instruments (pH, Eh, conductivity, turbid)
 - Calibrate the field measurement instruments (pH, Eh, conductivity, turbidity, dissolved oxygen) according to the instrument manufacturer's procedures for calibration;
- 3. The surface water samples should be collected in a downstream to upstream progression;
- 4. Rinse the intermediate sampling container at least three times with the surface water to be sampled, prior to sample collection;
- 5. The surface water samples should be collected with the intermediate sampling container in such a manner as to minimize re-suspension of bottom sediment. Collect the surface water samples for laboratory and field analyses as close to the center of the stream as possible.
- 6. When analysis is performed for organic parameters, a trip blank for each day of sampling must accompany the samples in the field and be analyzed;
- 7. Check pH of samples collected for total metals, ammonia, COD, cyanide, hardness, TKN, TOC, and phenols using pH paper to ensure that samples are preserved below a pH of 2.
- 8. Record on the Chain-of-Custody sheets any pertinent information including sample appearance (color, odor, turbidity), weather, adverse conditions related to the sampling point, etc; and
- 9. Decontaminate the sampling equipment which will be reused for sampling of other monitoring points, using appropriate and acceptable decontamination methods.

Appendix C includes a listing of the requirements for sample containers, preservation techniques, and maximum holding times for the host of various routine, baseline, and expanded parameters.

2.4.3 Landfill Gas Monitoring

As previously described, post closure landfill gas monitoring will include the measurement of explosive gases at 15 to 20 pre-staked landfill cap perimeter locations during each monitoring event. Landfill gas monitoring shall be completed, concurrently during postclosure groundwater and surface water monitoring tasks, utilizing a multi-gas meter. The following procedures will be followed for the measurement of landfill gases at each of the landfill site:

- 1. Prepare Landfill Gas Monitoring Record Sheets (Appendix B);
- 2. Calibrate multi-gas meter prior to site arrival according to the manufacturers procedures for calibration;
- 3. Gas measurements shall be consistently taken at 15-20 pre-staked locations proximate to the perimeter of the landfill cap;

- 4. Prior to each gas measurement, the multi-gas meter shall be purged by assessing background ambient air quality for a minimum duration of one minute;
- 5. Gas measurements shall be completed for parameters including, percent LEL (lower explosive limit), percent oxygen, carbon monoxide concentration, and hydrogen sulfide concentration, with subsequent readings logged on the Landfill Gas Monitoring Record Sheets (Appendix B).
- 6. The results of each gas monitoring event shall be listed and interpreted within subsequent post-closure monitoring reports.

2.5 Field Parameters

Immediately after the well has been purged, field parameters shall be measured. Field parameters are measured by the field sampling team prior to and after samples are collected for laboratory analysis. It is important to measure the field parameters before and after laboratory analysis so as to evaluate the stability of the groundwater. All field test equipment shall be calibrated at the beginning of each sample day, and shall be checked and re-calibrated according to the manufacturer's specifications. Calibration information shall be reported with the analytical results. Parameters which are to be measured in the field include specific conductance, temperature, pH, turbidity, and Eh.

Specific Conductance

Electrical conductance or conductivity is the ability of a substance to conduct an electrical current. By definition, conductance is the reciprocal of resistance. Thus, the units for conductance are reported as reciprocal ohms or mhos. To avoid inconvenient decimals, data shall be reported in micromhos. Specific conductance shall be measured using a portable electronic instrument made for measuring specific conductance and shall be recorded on the Monitoring Well Data Sheet (Appendix B). The manufacturer's instruction for calibration, operation, and maintenance of the instrument shall be followed.

Temperature

The temperature of the recovered groundwater shall be measured with a portable hand held thermometer and recorded on the Monitoring Well Data Sheet (Appendix B). The thermometer used should be capable of measuring temperature to an accuracy of 0.5° F. The manufacturer's instructions for calibration, operation, and maintenance of the instrument shall be followed.

pН

The notation "pH" is used to represent the hydrogen-ion concentration and is the negative base 10 log of the hydrogen-ion activity in moles per liter. Although it is a concentration measurement, the pH is generally taken to mean hydrogen-ion activity rather than concentration and is reported in Standard Units (SU). The pH of the groundwater shall be measured with a portable electronic pH meter. The instrument shall be calibrated daily with standard known pH solutions. The pH meter should be capable of measuring pH to an accuracy of 0.05 standard pH units. The manufacturers instructions for calibration, operation, and maintenance of the instrument shall be followed. The pH reading shall be recorded on the Monitoring Well Data Sheet (Appendix B).

Redox Potential (Eh)

The term redox potential (Eh) is used to represent the relative intensity of oxidizing or reducing conditions in solutions. Groundwater in contact with air can be expected to show effects from oxygen. Measurements on reducing systems such as groundwater containing ferrous or ferric iron are meaningful only if oxygen is very carefully excluded from all parts of the sampling and measuring system. Eh measurements of pumped groundwater that has not contacted air requires special equipment and great care. Eh shall be measured using a portable, electronic Eh meter. The manufacturer's instructions for calibration, operation, and maintenance of the Redox Potential meter (tester), such as a "ORP Testr," meter shall be followed (an example of the calibration, maintenance, and operation instructions for the ORP Testr is included within Appendix C). The Eh reading shall be recorded on the Monitoring Well Data Sheet (Appendix B).

2.6 Sample Preservation

Many of the collected samples require preservation by chemical additives. For convenience purposes and QA/QC considerations, these preservatives are often added to the sample bottles in the laboratory, prior to sample collection. This approach reduces the amount of sample handling in the field and allows for more uniformity in sample preparation. The addition of chemical preservatives to the samples is dependent upon the type of analysis to be performed and the analytical methods to be employed. The laboratory should provide the needed information pertaining to the proper procedures for preservation of samples. Preservation techniques, container types, and holding times will be consistent with the most recent version on NYSDEC QA/QC protocols, as listed in Appendix C.

2.7 Chain-of-Custody Documentation

All samples collected as part of the EMP at the landfill must be in the custody of an approved person from the time the sample is collected until the sample is analyzed for the last time. This custody must be documented on a Chain-of-Custody form which must accompany the sample at all times. The person who is responsible for collecting the sample must sign their name and record the time and date of sample collection. If the sample is transported to the laboratory by someone other than the sampler, the courier must retain custody of the sample and the Chain-of-Custody form must have their signed name and the time and date of acceptance. This Chain-of-Custody must be maintained if sample analysis is to be subcontracted to a laboratory other than the prime. Finally, the signed Chain-of-Custody sheet must be included with the sample data report submitted to the engineer and subsequently to the NYSDEC. A Chain-of-Custody sheet must be completed for each set of sample bottles including QA/QC samples, collected from each environmental sampling point. The Chain-of-Custody sheets must also include information related to sample characterization. At a minimum, the Sample Characterization/Chain-of-Custody Sheet must include the following information; 1) Full laboratory name and address; 2) Job name/location/designation; 3) Sample name/designation

Monitoring Wells only

Date of well evacuation Well depth Depth to water (from top of riser pipe) Well volume Volume of water evacuated Method of well evacuation Field parameters (pH, temperature, color, appearance, etc.,) at the start and end of evacuation

All samples

Date and time of sampling Method of sample collection (grab, composite, etc.,) Field parameters (pH, Eh, temperature, conductivity, appearance, color, etc.,) Sample preservatives Analyses to be performed Field notes stating any relevant information Chain-of-Custody signature lines including spaces for date and time

2.8 Sample Identification

Sample identification documents shall be prepared to maintain sample identification. All samples shall be identified with a sample label. Identification labels shall be properly filled out and placed on the sample container after each sample is collected. Identification labels shall be consistent and similarly filled out for each sample collected and shall be consistent for all sampling rounds. The sample Identification tag or label shall include the following information:

- Project Name (ex. Lindley South Landfill Post-Closure Monitoring)
- Sample Identifier (ex. MW-1)
- Sample Type (ex. groundwater)
- Sample Collectors Name (in full)
- Sampling Date (mm/dd/yy)
- Sampling Time (hour:min)

Each sample shall be assigned a unique identifier which shall be the alphanumeric associated with the sampling location. For example, the groundwater sample identifier shall be used to track the sample through all subsequent handling, analysis, data reduction, and reporting procedures.

2.9 Analyses to be Performed

In accordance with correspondence from project specific NYSDEC personnel, quarterly Post-Closure groundwater and surface water monitoring at the Lindley South Landfill shall be completed for 6NYCRR Part 360 baseline parameters (1-quarter) and Part 360 routine parameters (3-quarters). As previously mentioned, residential water well monitoring shall be completed for Part 360 baseline parameters on an annual basis. The environmental and facility monitoring points shall be maintained during post-closure for a period of 30 years. The baseline and routine parameter lists, as identified in the 6NYCRR Part 360 Regulations (NYSDEC 1993), is presented in Appendix D. After the first five years of monitoring are complete, the County may request that NYSDEC modify the monitoring program.

2.10 Analytical Methodologies

Baseline and Routine parameter analysis of the samples collected during the Post-Closure Environmental Monitoring Program will be conducted according to New York State Department of Health (NYSDOH), 6NYCRR Part 360 NYSDEC (Oct. 1993), or United States Environmental Protection Agency (USEPA) accepted methodologies as listed in 6NYCRR Part 360-2.11(d)(6). Many of the leachate indicator parameters may also be analyzed according to methods described in "Standard Methods for the Examination of Water and Wastewater" (1989). It should be noted that many of the parameters may be analyzed by more than one acceptable methodology. Appendix D contains a representative list of analytical methods, representative method detection limits (MDLs), and the Chemical Abstract Service (CAS) numbers assigned to the specified parameters.

2.11 Reporting and Remedial Objective Requirements

Environmental Monitoring Reports will be submitted to the NYSDEC on an annual basis, after receipt of the analytical data results from the corresponding annual monitoring event. The report is intended to summarize the analytical data results for the sampling round, provide interpretations of such results, and report the observance of exceedences of NYSDEC water quality standards or guidance values (NYSDEC, 1991a).

The quarterly monitoring reports shall present the following information:

- Analytical data reports indicating the monitoring point designation of upgradient monitoring wells, date of sample collection, analytical results, QA/QC notations, method detection limits (MDLs), and Chemical Abstract Service (CAS) numbers for applicable parameters;
- A summary of the contraventions of NYSDEC water quality standards and guidance values, if any. Tables shall include units of measure, a column of action levels, descriptive sample IDs, and current and previous sample results tabulated for trend analysis;

h

- Tables or graphical representations comparing current and existing water quality, and upgradient and downgradient water quality which may include the use of Piper plots, Stiff diagrams, tables, or other analyses. Tables shall include units of measure, a column of action levels, descriptive sample IDs, and current and previous sample results tabulated for trend analysis;
- Listings of parameters determined to be above background conditions or statistically determined trigger values; and
- Interpretation and discussion of the environmental monitoring analytical results and recommendations for modifications to the Environmental Monitoring Plan based upon the observed exceedences of NYSDEC water quality standards and guidance values (NYSDEC, 1991a) or statistically determined trigger values.

Although it is usually preferred that Remedial Objectives or Action Levels be outlined prior to initiating Post-Closure monitoring, it should be noted that only a limited number of previous monitoring events have been conducted at the landfill. As such, it is planned that initial post-closure monitoring event data be assessed utilizing comparisons with 1) NYSDEC Water Quality Standards; 2) Background-Upgradient/Upstream data; and 3) Historical Data General Comparisons, at least until five rounds of historical monitoring data have been compiled (including the data generated as part of the two RI sampling events). A listing of the applicable NYSDEC Water Quality Standards (for routine and baseline list parameters), site specific Background-Upgradient/Upstream data, and Historical RI data, which will utilized to initially assess Post-Closure groundwater and surface water quality, are included within Appendix D.

It is intended that statistical trigger levels, based on historical and background data, be established in the near future when at least three additional rounds of environmental monitoring data have been obtained. Together with NYSDEC Water Quality Standards and Guidance Values, the statistical trigger levels will be utilized as Remedial Action Levels, to indicate the need for contingency monitoring and/or remediation at the site. As previously mentioned, it is planned that initial post-closure monitoring event data be assessed utilizing comparisons with 1) NYSDEC Water Quality Standards; 2) Background-Upgradient/Upstream data; and 3) Historical Data General Comparisons, at least until five rounds of historical monitoring data have been compiled. Copies of the landfill monitoring reports, and associated correspondence, will be provided to:

Ms. Mary Jane Peachey New York State Department of Environmental Conservation Region 8 Regional Hazardous Waste Engineer 6274 East Avon-Lima Road Avon, New York 14414

2.12 Contingency Water Quality Monitoring Plan

The Contingency Water Quality Monitoring Plan (CWQMP) describes what actions should be taken with regard to the EMP, in the event that contamination is detected at certain environmental monitoring points. The environmental monitoring points subject to the CWQMP are the groundwater monitoring wells and surface water monitoring locations.

The determination of contamination may be made from the following criteria:

- Detection of an analyte above background concentrations;
- · Detection of an analyte in exceedence of NYSDEC groundwater standards; and/or
- Determination of statistically significant increases in parameter concentrations between upgradient and downgradient conditions.

It should be noted that the detection of most metal parameters at elevated concentrations may be due to elevated sample turbidity. If elevated metal parameters meet any of the above criteria, and the sample turbidity is observed to be relatively high, additional assessment information can be determined through the analysis of filtered metals analysis. The filtered metal parameter concentration should then be subjected to the above mentioned criteria.

If significant or above background contamination by one or more of the baseline or routine parameters is determined at a groundwater or surface water monitoring point, then the affected monitoring point must be sampled for the parameter(s) of concern during a subsequent contingency sampling round within 3 months.

Subsequent sampling for parameters of concern must be conducted quarterly at the affected monitoring point until such time that it can be shown to the NYSDEC that the elevated parameter is not landfill-derived or that the release of the parameter from the landfill has been remediated.

If contamination, above background and above historical statistical trigger levels, by any toxic metal (antimony, arsenic, beryllium, barium, cadmium, chromium, chromium VI, copper, lead, mercury, nickel, selenium, silver, thallium, or zinc), cyanide, or volatile organic compound is determined at a groundwater or surface water monitoring point, the affected environmental monitoring point must be sampled for Part 360 expanded parameters during a contingency sampling round, following the monitoring event of occurrence. The contingency sampling must be followed until such time that it can be shown to the NYSDEC that the recently identified elevated parameter is not landfill-derived or that the release of the parameter from the landfill has been remediated. The cessation of contingency sampling is subject to NYSDEC approval. In instances where the existing water quality monitoring points, a trigger level will be established as part of the CWQMP which will specify a parameter concentration level which will serve as an action level before the CWQMP would be implemented. This statistical test would determine the acceptable range of the parameter concentration for a specified confidence level of 95%, as determined by a t-Test statistical analysis.

As previously noted, until at three additional monitoring events have been completed and a historical statistical database can be accordingly established, post-closure monitoring data will include a review and assessment of the analytical data as compared to 1) NYSDEC Water Quality Standards; 2) Background vs Downgradient/Downstream Data; and 3) Historical Data to determine potential impacts and the subsequent need for contingency monitoring. It is intended that statistical trigger levels, based on historical and background data, be established in the near future when at least three additional rounds of environmental monitoring data have been obtained. Together with NYSDEC Water Quality Standards and Guidance Values, the statistical trigger levels will be utilized as Remedial Action Levels, to indicate the need for contingency monitoring and/or remediation at the site.

SECTION 3

ŧ

J.

,

2

i i i

ļ

ŝ

nin k

4

SECTION 3

POST-CLOSURE MAINTENANCE OPERATIONS PLAN

The Post-Closure Maintenance Operations Plan describes the procedures that will be utilized by Steuben County to provide proper maintenance of the facility and meet the applicable requirements of 6NYCRR Part 360 for a minimum period of 30 years after landfill closure.

3.1 GENERAL

The general site plan is shown on Figure 1. The site, consisting of a south and north landfill with the south landfill being closed and covered in accordance with the Engineering Plans and Specifications. The final cover system is a series of continuous layers of soil and geosynthetics placed over the existing cover material of the landfill, which serves to restrict infiltration of precipitation, support vegetation, control landfill gas and leachate, and promote surface drainage without erosion of the final cover system. The final cover system, starting at the surface, consists of 6 inches of topsoil, a barrier protection layer of 24-inches of soil, a geocomposite drainage layer, a geomembrane with a minimum thickness of 40 mils, a geotextile layer, and granular gas venting trenches. The topsoil layer is an uncompacted layer of soil suitable for vegetative growth. Combined with the barrier protection layer, the topsoil layer should provide an adequate root zone.

A geomembrane with a minimum thickness of 40 mils and a maximum coefficient of permeability of 1×10^{-12} cm/sec was installed as the low permeability barrier layer. A geocomposite drainage layer was placed between the barrier protection layer and the geomembrane to prevent liquid build-up on the geomembrane. The gas venting system consists of a series of stone filled trenches and risers that circumscribe the landfill. The gas venting system provides for the movement of landfill gas to the venting risers. The granular material used in this system consists of a NYSDOT No. 2 coarse aggregate meeting the requirements of NYSDOT Standard Specification Section 703-02.

3.2 SITE MAINTENANCE SCHEDULE

Annual post-closure inspection and corrective action activities will be conducted on a quarterly basis. The inspections will be scheduled to coincide with the quarterly inspections of the leachate storage facility, thus performing an integrated inspection of the overall South Landfill facility. Additionally, inspection activities will occur after heavy rain events which may be suspected of endangering the integrity of the cover system or drainage structures.

Inspections will encompass the closed landfill, the drainage systems, service road, and perimeter fence. The inspections will be performed by qualified personnel experienced in the construction and function of a multi-layered cover system, and are familiar with the history as well as the ongoing activities at the site.

Vehicular traffic on the landfill will be limited to the service road only, and will be restricted in size to pick-up trucks and smaller vehicles.

Inspection

The landfill cover system will be evaluated for overall integrity, as well as for other parameters as identified in Subsections 3.4 through 3.7 below. The service road will be inspected for differential settlement, rutting, or erosion. The perimeter chain link fence will be inspected for breaches in the fencing fabric, stability of fence posts, and for operability of the gates.

Corrective Action

When necessary, corrective actions will be performed in accordance with Subsections 3.4 through 3.7 below, and as identified herein. Repairs to geosynthetic liner components will be made by authorized service representatives of the respective manufacturers.

If, during the quarterly inspections, excessive leachate seepage is observed, the area and the extent of the seepage will be documented. A plan to mitigate the seepage and remediate the area will be prepared and forwarded to the NYSDEC for review and approval. When possible, remedial efforts will involve routing the seepage into the existing leachate collection system.

Repairs to the systems constituting the closed landfill site, including the cover system, service road, drainage systems and perimeter fence, will be made in conformance with the engineering plans and specifications for the landfill closure.

3.3 FINAL GRADES AND SIDE SLOPES

The final grading plan is shown on Figure 2. The final cover system has a minimum slope of 4 percent and a maximum slope of 33 percent in conformance with 6NYCRR, Part 360-2.13 (q)(2)(ii).

3.4 DRAINAGE AND EROSION CONTROL

Proper drainage and erosion control is necessary to maintain the integrity of the final cover system. Proper drainage design should minimize surface soil erosion, control peak rates of runoff, and prevent ponding. The final landfill grading plan has been designed to enhance proper surface drainage and direct the runoff to storm water management facilities.

Landfill slopes were designed and constructed as noted in Subsection 3.3 above. The minimum 4 percent slope will promote surface water runoff and minimize ponding. A designed maximum slope of 33 percent, along with the vegetative mix selected, will restrain surface flow velocities and minimize surface soil erosion or scouring.

The drainage control facilities consist of a perimeter drainage system located just inside the property boundaries. The system collects surface water from the site, directs the collected run-off toward Gibson Road on the east and west sides of the landfill, and discharges into the existing drainage channel along Gibson Road. The perimeter channels will cut off run-on to the final cover system from off site, and will prevent site run-off to adjacent properties. The perimeter drainage system was designed and constructed to withstand a peak discharge of a 24-hour, 25-year frequency storm. Synthetic erosion control matting and stone riprap were placed in those areas

where channel velocities for the design peak discharge storm are anticipated to exceed the maximum non-erosive velocity for a vegetated earthen channel.

Inspection

The surface of the closed landfill will be inspected for erosion damage, particularly on the steeper sideslopes and around drainage structures. Personnel will look for damage such as rutting or washouts. The perimeter drainage system will be inspected for breaches in the drainage channels; and for system blockage due to debris build-up, sediment deposits, erosion or excessive vegetative growth. The integrity of the erosion control matting and riprap will also be examined.

Corrective Action

In the event that erosion damage is noted, corrective actions will be implemented. Minor erosion to the cover soil system will be repaired by installing the appropriate cover layer material and reestablishing vegetation. Areas which exhibit chronic erosion will be remediated by re-grading, installing supplemental erosion control materials, or diverting runoff from the area. The perimeter drainage system will be graded and maintained to be consistent with the originally constructed slopes. Erosion control materials will be repaired or replaced as necessary. Sediment and debris build-up in the drainage channels, particularly at culvert inlets, will be removed by hand digging to prevent damage to the channel's vegetative growth or synthetic erosion control material. More detailed remedial measures will be determined by the circumstances causing the erosion.

3.5 VEGETATIVE COVER MAINTENANCE

Cover vegetation will be maintained during the post-closure period for a minimum of 30 years. Vegetative cover will be established and maintained on the exposed final cover material within four months after placement of the final cover system. If this cannot be achieved due to seasonal constraints, measures such as installing geotextile coverings will be taken to maintain the integrity of the final cover system before the establishment of vegetative cover. After the vegetative cover is established, the cover will be mowed at least twice annually, or as necessary to control the growth of wild and deep-rooted vegetative species and to reduce the potential for introducing vector habitats.

Inspection

In order to prevent erosion of the final cover material, it is necessary to maintain the proper density and condition of the vegetative cover. Therefore, the condition of the vegetative cover will be evaluated during routine inspections. Investigations during the wet months will look for washouts of vegetation, while investigations during the dry months will look for signs of deterioration due to drought conditions. The inspection will also be performed to observe whether any brush or trees are becoming established on the landfill cover system.

Corrective Actions

When vegetation needs improvement, additional soil, seed and/or fertilizer will be applied as necessary. No herbicides or pesticides shall be used on the landfill cover. The seed mixture applied will be the same as that applied during initial seeding, unless it has been determined that the original mixture is not appropriate for the landfill conditions. If brush or tree growth is found, it will be cut at ground level and the cuttings removed.

3.6 ENVIRONMENTAL AND FACILITY MONITORING

Environmental and Facility monitoring points will be maintained and sampled during the postclosure period for a minimum of 30 years. Quarterly monitoring, including routine parameter list (three quarters) and baseline parameter list (one quarter) sampling, will be performed on the groundwater and surface water samples for a minimum of five years, after which time the County may request that NYSDEC revise the sampling frequency. Quarterly and annual summary reports of the results of the environmental and facility monitoring will be developed. A detailed description of the monitoring activities is included in Section 2 of this Post-Closure Environmental Monitoring Plan.

3.6.1 Groundwater Monitoring Wells

Inspection

During each quarterly site visit, the groundwater monitoring wells will be inspected. This inspection will include an evaluation of the integrity of the outer protective casing and concrete pad; the integrity of the inner well casing; the working condition of the well cap

and lock; whether the well cap is securely locked; and the legibility of the well identification number.

Corrective Action

Maintaining the integrity of the groundwater monitoring wells is of paramount importance. Deficiencies in well integrity will be addressed by landfill personnel as soon as practicable. If damage is significant, a well installation contractor will be contacted for consultation and remedial measures.

3.6.2 Benchmarks

The benchmarks are the top of PVC risers for monitoring wells MW-1, MW-2S, MW-2D, MW-3, MW-4, GW-1 and GW-4.

Inspection

Settlement information is necessary to evaluate the integrity of the closure system. Thus, it is important to maintain the integrity of the reference benchmarks. Therefore, during each inspection, the reference benchmarks will be inspected.

Corrective Action

If problems with the reference benchmarks are discovered, they will be corrected as soon as practicable by resurveying to establish their new locations or elevations.

3.6.3 Gas Vents

Inspection

During each inspection, the gas vents will be inspected. This inspection will include an evaluation of the integrity of the vent riser for such things as cracks, breaks, displacement, settlement, or loose or missing screens.

Corrective Action

Deficiencies in the gas vents will be corrected as soon as practicable. If the riser has been displaced or has settled, the cause of the displacement or settlement will be determined and corrected appropriately.

3.7 SETTLEMENT AND SUBSIDENCE

Inspection

Settlement and subsidence will be monitored during the post-closure period. Investigations will include a visual inspection to identify readily discernible areas where settlement or subsidence has occurred.

Corrective Action

If minor localized areas of settlement are found, they will be corrected by the application of additional cover material and re-vegetated. If settlement is significant or areas of subsidence are noted, an investigation will be initiated to identify the cause of the problem and any potential damage to the cover system. If necessary, regrading will be conducted to maintain drainage and erosion control.

SECTION 4

ò

3

4

-

نيد

d.

SECTION 4

CONTINGENCY PLAN

4.1 INTRODUCTION

The purpose of a Contingency Plan, as required by 6NYCRR Part 360 Regulations, is to set forth an organized, planned and coordinated, technically and financially feasible, predetermined course of action to be taken when potentially harmful or environmentally threatening situations occur during the closure and post-closure operation of a landfill. The County shall be prepared to respond to problems that may be experienced during the post-closure period, including extraordinary, or possible "worst case" situations that may develop.

The Contingency Plan is an integral part of the Post-Closure Monitoring and Maintenance Operations Manual and is to be used by County personnel in responding to potentially harmful or environmentally threatening situations. It is designed to be used by the personnel responsible for post-closure maintenance of the landfill and is to be kept readily accessible. Maintenance personnel shall become familiar with identifying situations requiring contingency action and shall be instructed in the appropriate response.

4.2 EMERGENCY COORDINATOR AND ALTERNATES

The following is a List of Emergency Coordinators and Alternates:

	<u>Telephone</u>	
Emergency Coordinator:	Assistant Commissioner (Landfill)	(607) 776-9631
Alternate:	Commissioner of Public Works	(607) 776-9631

4.3 **RESPONSIBILITIES**

4.3.1 On-Site

The Assistant Commissioner will be in charge of the activities carried out at the Lindley South Landfill. He has primary responsibility for insuring that this Contingency Plan is implemented as described. He has the responsibility and authority to implement the provisions of the Contingency Plan and is the primary emergency coordinator. Secondary responsibility in his absence is assigned to the alternate emergency coordinator listed in Subsection 4.2. Selected County personnel have been designated as emergency response team members and are responsible for carrying out the details of the implementation program as directed by the Emergency Coordinator. Each of the individuals shall be thoroughly instructed in the implementation of the Contingency Plan and shall participate in both on-site and off-site training programs.

4.3.2 Off-Site

In the event of an emergency requiring assistance from off-site, such as fire, ambulance, etc., the "911" Steuben County Emergency Response System will be utilized to obtain the specific emergency response services needed.

4.3.3 Emergency Coordinator

The Assistant Commissioner is responsible for implementation of this Contingency Plan, establishment and supervision of the emergency response team, and conducting training programs for personnel assigned duties on the emergency response team.

- A. Responsibilities of the Emergency Coordinator BEFORE the emergency include the following:
 - Insure there is an alternate emergency coordinator ready to take over in his absence who is fully trained and capable of implementing this contingency plan;
 - Be familiar with the physical layout of the facility and the operations carried out in each part of the facility;

- Develop an understanding of the emergency response organization and insure adequate staffing of the emergency response teams;
- Provide training for all members of the emergency response organization to ensure that all members know and understand their assigned responsibilities before, during, and after an emergency;
- Conduct regularly scheduled drills, meetings, and demonstrations to update training and evaluate performance of the emergency response team; and
- Establish close cooperation with local fire departments, including regularly scheduled visits to the site and briefing on potential hazards and facility emergency response procedures.
- B. Responsibilities of the Emergency Coordinator DURING an emergency include the following:
 - Direct and coordinate the emergency response team;
 - Determine if assistance of emergency services are needed, and contact them for assistance if needed;
 - Coordinate the efforts of the on-site emergency response team with off-site emergency response agencies;
 - Supervise the evacuation of non-essential personnel from the area of the emergency, if required; and
 - Assess possible hazards to human health or the environment that may result from a fire or explosion, considering both direct and indirect effects. The assessment shall include considerations of the effects of toxic, irritating, or asphyxiating gases, hazardous surface run-off due to water or chemical agents used to control fires, etc.
- C. Responsibilities of the Emergency Coordination AFTER the emergency include the following:
 - Assure that emergency situations will be thoroughly addressed;
 - Supervise post emergency surveillance of any affected areas to insure that the emergency situation does not redevelop;
 - Supervise post emergency clean-up and establishment of normal facility conditions;

- Supervise the restoration of emergency equipment and materials into a state of readiness (clean equipment, re-stock supplies which have been used in this emergency, etc.);
- Advise appropriate authorities when the emergency is over;
- Determine the cause of the emergency (employees who were near the scene should be questioned independently regarding their knowledge or observations of incidents preceding the emergency);
- Assess the effectiveness of, and modify if necessary, existing conditions to prevent future emergencies from similar causes;
- Modify existing emergency response procedures, if required;
- Record all actions taken under the Contingency Plan in the facility operating records;
- Notify the appropriate regulatory agencies as required by regulation; and
- Submit reports to the NYSDEC as described in Subsection 4.11 of this plan.

4.3.4 Emergency Response Team Members

A minimum of two County employees, one of whom shall be a qualified equipment operator,

shall be assigned to the emergency response team.

- A. Responsibilities of the Emergency Response Team BEFORE the emergency include the following:
 - Participate in scheduled training programs, drills and demonstrations to develop requisite emergency response skills;
 - Become familiar with start-up and operation of all emergency equipment maintained for use in an emergency; and
 - Become familiar with the location, use, and availability of stocks of supplies and materials maintained for use during an emergency.
- B. Responsibilities of the Emergency Response Team DURING the emergency include the following:
 - Upon notification of an emergency, team members shall proceed to the landfill with their equipment. If the equipment is required to remove materials or trench and dike around the scene of the emergency, proceed as directed by the Emergency

Coordinator.

- If the equipment is not required, park it in a safe place away from the scene of activity without obstructing access to the scene. Perform duties as assigned by the Emergency Coordinator.
- C. Responsibilities of the Emergency Response Team AFTER the emergency include the following:
 - Assist in the clean-up of the emergency response area and restoration of the site.
 - Stand safety watch, if required.

4.4 IMPLEMENTATION OF THE CONTINGENCY PLAN

The Contingency Plan shall be implemented in the following situations if a threat to human health or the environment is evident:

- A. Fire and/or explosion
 - A fire that could cause the release of toxic or explosive gases or materials;
 - A fire that spreads and could possibly ignite materials at other locations on-site or could cause heat-induced explosions;
 - A fire that could possibly spread to off-site areas;
 - Use of water or water and chemical fire suppressant that could result in contaminated runoff;
 - An imminent danger exists that an explosion could occur, causing a safety hazard due to flying fragments or shock waves;
 - An imminent danger exists that an explosion could ignite equipment at the facility;
 - An imminent danger exists that an explosion could result in release of leachate off-site; or
 - An explosion has occurred.
- B. Spills or material release
 - A spill that could result in release of flammable liquids or vapors, thus causing a fire or gas explosion hazard;

- A spill that can be contained on-site, but where the potential exists for groundwater contamination; or
- A spill that cannot be contained on-site, resulting in off-site soil contamination and/or ground or surface water pollution.
- C. Leachate Migration or Impacts to Local Groundwater or Surface Water
 - Evidence of leachate migration or additional outbreaks from the landfill.
 - Evidence of groundwater impacts which exceed historical conditions and/or background conditions; or

4.5 NON-CRITICAL INCIDENTS

This plan shall not be implemented for incidents which occur within the normal maintenance operations plan. Situations which occur in these areas are handled via routine operational procedures.

4.6 EMERGENCY RESPONSE PROCEDURES

4.6.1 Notification

In the event of any emergency at the Lindley South Landfill site, immediately contact the appropriate personnel according to the list presented in Subsection 4.2. Prior to calling, the party reporting the emergency should make note of where on the site the emergency is.

4.6.2 General Information

Communication is required for successful operation of a Contingency Plan. Successful communication should help ensure expeditious mustering of all personnel involved. Effective maintenance of a communication system during the emergency period is always important. The Emergency Coordinator or his Alternate will be notified by telephone or two-way radio when an emergency exists. All communication equipment should be periodically checked to make sure it is in good working condition and all defective communication equipment shall be repaired or replaced if necessary.

4.6.3 Emergency Notification List

In the event of an emergency, designated personnel shall be called as listed in Subsection 4.2. If the listed Emergency Coordinator cannot be reached, the Alternate shall be called.

4.7 SPECIFIC PROCESS CONTROL PROCEDURES

4.7.1 Fire

The likelihood of a fire at a closed landfill is relatively low. The intermediate cover consists of a minimum of 12 inches of compacted soil which in turn is overlain by the final cover system. This total system should be effective at sealing the landfill and thereby substantially reducing the possibility of spontaneous combustion. Additional fire prevention measures which should be taken for the closed landfill include:

- Designation of the closed landfill area as a "No Smoking" zone;
- Do not allow fires or open burning within 200 feet of the closed landfill area;
- Perform proper routine inspection of the gas venting system to document that the system properly vents gases and minimizes migrations of explosive gas from the site; and
- Perform routine inspection of the final cover system integrity to detect cover rupture which could allow waste to be exposed. Such exposure could provide an avenue for air to enter the waste mass to support combustion.

While the possibility of a fire at the closed landfill should be relatively low, provisions shall be made with the Local Fire Department to respond should a fire occur. Though the Emergency Response Team would have primary responsibility for responding to the emergency, the fire department would have responsibility for conducting the actual firefighting efforts. The Emergency Response Team would be available to assist in the firefighting effort by supplying and placing soil to help smother the fire or by containing runoff that may be contaminated due to the firefighting effort. After completion of the firefighting efforts, the Emergency Response team, with the assistance of a Contractor, would undertake necessary site restoration work, such as repairs to the final cover system and cleaning and returning equipment that does not belong to the fire department.

4.7.2 Landfill Gas

Gases are produced by the decomposition of organic matter in solid waste. The primary gases of decomposition are methane and carbon dioxide. Some nitrogen and oxygen and traces of hydrogen sulfide, ammonia, hydrogen, gaseous hydrocarbons, and volatile organic species are sometimes found in landfills. The amount and composition of gases produced depends on the quantity and characteristics of the wastes deposited, the amount of moisture present, and various other factors. Compaction of the refuse, which increases the density of the landfill, may decrease the rate of water infiltration into the landfill, which slows the ability of bacteria to biodegrade the waste. As a result, when waste is densely compacted, gas will be produced at lower rates over longer periods of time. Methane, like carbon dioxide, is odorless but unlike carbon dioxide, methane is relatively insoluble in water. In addition, methane is explosive at an atmospheric concentration of 5 to 15 percent by volume. Gas vents shall be constructed through the final cover layers to provide passive venting of landfill gases. These vents shall be constructed as part of the final cover system of the landfill. The monitoring and detection of landfill gases should be an important aspect of post-closure operations. Periodic testing for landfill gases shall be performed as part of the Maintenance Operations procedures at the following locations:

- Groundwater monitoring wells;
- · Gas vents; and
- Perimeter of solid waste mass.

4.7.3 Structural Failure

Structural failures at the landfill could include:

- Landfill side slope failure;
- Sliding failure between layers of cover components; and
- Subsidence.

If a side slope failure were to occur, the following procedures shall be implemented:

• Contain and isolate sloughed materials which may be contaminated;

- If warranted, reinforce the failed area with additional embankment materials to prevent expansion of the failure;
- Contain liquids from the sloughed material which may be migrating away from the facility;
- If the failure allowed material to slough outside the limits of the landfill, construction of a temporary earthen berm around the affected material may be warranted to help contain waste and liquids;
- Should precipitation accumulate within the failed area, implement procedures to minimize infiltration of precipitation into the facility;
- Temporarily cover the failed area with on-site soils, and grade to drain to reduce infiltration of precipitation into the failed area;
- Construct temporary berms as necessary to divert surface runoff from the failed area;
- Once the system is under control, solicit opinions from consultants and other experts on repair and remediation of the failure and obtain concurrence from the NYSDEC prior to initiation of corrective action; and
- Groundwater and surface water monitoring should be performed on a regular basis to permit prompt evaluation with regard to water quality contravention.

Sliding failure between layers of cover components is not expected to occur. However, if such a failure should occur on a large scale, corrective action similar to the procedures outlined above for landfill side slope failure shall be taken. If such a failure should occur on a small scale, the County may elect to promptly repair the failure by quickly replacing the failed materials in kind in the field and returning the cover system to its original lines and grades. The cause of any failure should be investigated to prevent its recurrence.

A subsidence failure could be caused by settling of the waste due to decomposition of wastes in the landfill and time deformation of the waste under the load of the material on top of it. Minor subsidence can be expected to occur at any landfill facility. Major subsidence is not expected to occur at a landfill when the waste and cover materials are compacted. A minor subsidence prior to final capping could be corrected by the addition of cover material to return the area to its design grade if deemed necessary. A major subsidence shall be corrected in a manner similar to the steps for handling a landfill sideslope failure. The cause of the subsidence shall be investigated so that measures can be devised to reduce the potential for future major subsidence.

4.7.4 Groundwater Contamination

If the post-closure environmental monitoring plan indicates groundwater contamination by one or more of the routine or baseline parameters, then a contingency water quality monitoring program shall be implemented. The contingency water quality monitoring plan shall be conducted in accordance with Subsection 2.10 of this manual and with 6NYCRR Part 360-2.11(c)(4)(iii). In general, if the aforementioned procedures at the landfill indicate further investigation is warranted, the following remedial actions shall be initiated:

- Prepare a program to determine the source and extent of contamination, to be submitted to the NYSDEC within four weeks after receipt of the confirming water analysis;
- Implement the program upon approval by the NYSDEC and complete necessary investigations. Prepare a report presenting the findings and conclusions, making recommendations for future actions including a time schedule for completing remedial work;
- If remedial construction is required, prepare final plans and specifications, following the NYSDEC approval of the remedial action report; and
- Implement remedial construction after NYSDEC approval of the final plans and specifications, in accordance with the approved time schedule.

4.7.5 Surface Water Contamination

In the event the analytical results of the surface water samples indicate that the background water quality levels or that 6NYCRR Part 701 surface water quality standards have been exceeded, or if contamination by one or more of the routine or baseline parameters is found, then the contingency water quality program shall be implemented. The contingency water quality monitoring plan shall be conducted in accordance with Subsection 2.10 of this manual and with 6NYCRR Part 360-2.11(c)(4)(iii). If the procedure outlined above indicates contamination is partially or completely due to the closed landfill, then the following remedial procedures shall be initiated:

- An attempt shall be made to determine the source of contamination by examining the landfill side slopes and existing drainage patterns in and around the landfill site for visible evidence of leachate contamination;
- Repairs shall be made to the final cover system wherever identified leachate seeps occur on the landfill;
- Eroded areas shall be regraded, gullies filled, and the repaired area reseeded;
- If the number of seeps becomes a problem, an investigation shall be done to determine the cause and the desired comprehensive remedial action objectives; and
- Concurrent with the immediate on-site activities, the County shall retain a consultant to study the feasibility of and develop treatment processes for, the specific contaminant or contaminants that are elevated above the allowable levels in the surface water.

4.7.6 Odors

The primary sources of odors at a landfill are the putrescible portions of the municipal refuse received at the site. The relative isolation and buffering of the site should control most, if not all, odors emanating from the site, by affording distance for them to dissipate. Should odors become an off-site problem after installation of the final cover system, the physical source of the odors shall be investigated to confirm that they are being emitted by the landfill and not some other source. If the odors are suspected to be from the landfill, the route of the odors travelling off-site shall be investigated. The anticipated path of odor emission would be from the cover system's gas vents and subsequently moving off-site with prevailing wind currents. Should this be the case, a study of the vented landfill gases shall be conducted to determine the composition of the gases and what methods are suitable for odor control and elimination. A less likely path for odor emission is through the soil around the perimeter of the closed landfill. If odors attributable to the closed landfill become a problem and are not being emitted by the gas venting system, the possibility of emission by migration of gas through the soil shall be investigated.

4.7.7 Vectors

Vectors are any animals or insects that may carry diseases or otherwise cause a nuisance or property damage. Part of the routine inspection of the final cover system shall be for evidence of damage to the final cover system caused by vectors. This will primarily consist of burrows dug by animals such as rabbits, groundhogs and the like. Insects should not be a problem due to the final cover system, which should prevent their penetration into the former landfill. Birds should not pose a problem due to the thick final cover system which would prevent them from gaining access to the waste. In the event a problem develops with vectors, an extermination program shall be developed and implemented by a New York State certified extermination company retained to perform this task. Such a program must be in strict conformance with the requirements of the NYSDEC and NYS Department of Health.

4.7.8 Equipment Breakdown

As there would normally be no operating equipment at the closed landfill, equipment breakdown should not be a problem.

4.8 EMERGENCY EQUIPMENT

4.8.1 Location of Emergency Equipment

Location of emergency equipment shall be at the Landfill Maintenance Building.

4.8.2 Emergency Organization Drill

A simulated fire emergency shall be conducted on an annual basis to provide opportunity to test the response of the emergency organization, evaluate effectiveness of the training program, and observe the performance of individual members of the emergency organization. Results of each scheduled drill shall be documented accordingly. Training shall be augmented as indicated to remedy deficiencies discovered through the drills.

4.9 EVACUATION PROCEDURES

The need to evacuate the site or local area shall be determined by the Emergency Coordinator. Should the landfill site need to be evacuated, members of the emergency response team would be assigned to direct anybody on-site not involved with responding to the emergency to a remote area and then secure access to the landfill site. Should neighboring homes also need to be evacuated, the Emergency Coordinator shall contact the County Police and Local Fire Departments for assistance. Members of the emergency response team could also be assigned to notify and assist residents in evacuating their homes.

4.10 REQUIRED REPORTS

With any fire, spill, or personal injury or property damage, a report shall be filed for future record. Suggested forms are included in Appendix B. A thorough investigation of each of these occurrences should be performed to identify the cause and to develop appropriate measures that should prevent or minimize reoccurrence of the incidents. As soon as practicable after an emergency situation has been cleared up, all employees involved in the incident who were working in the vicinity should be questioned individually to learn all available facts.

The appropriate forms shall be completed. Additional sheets may be required to record pertinent information or to detail necessary corrective action. Completion of this investigation does not supersede the requirements for notification to appropriate regulatory agencies. The Emergency Coordinator shall note the time, date, and details of any incident that requires implementation of the Contingency Plan. Within 15 days after the incident, the Emergency Coordinator, shall submit a written report of the incident to the NYSDEC which includes:

- Name, address, and telephone number of the owner or operator;
- Name, address, and telephone number of the facility;
- Date, time, and type of incident (i.e., fire, explosion);
- Name and quantity of materials involved;
- The extent of injuries, if any;
- An assessment of actual or potential hazards to human health or the environment, where this is applicable; and
- Estimated quantity and disposition of recovered material that resulted from the incident.

Ms. Mary Jane Peachey New York State Department of Environmental Conservation Region 8; Regional Hazardous Waste Engineer 6274 East Avon-Lima Road Avon, New York 14414

FIGURES

Ń

-

-

FIGURE - 1

SITE PLAN

.

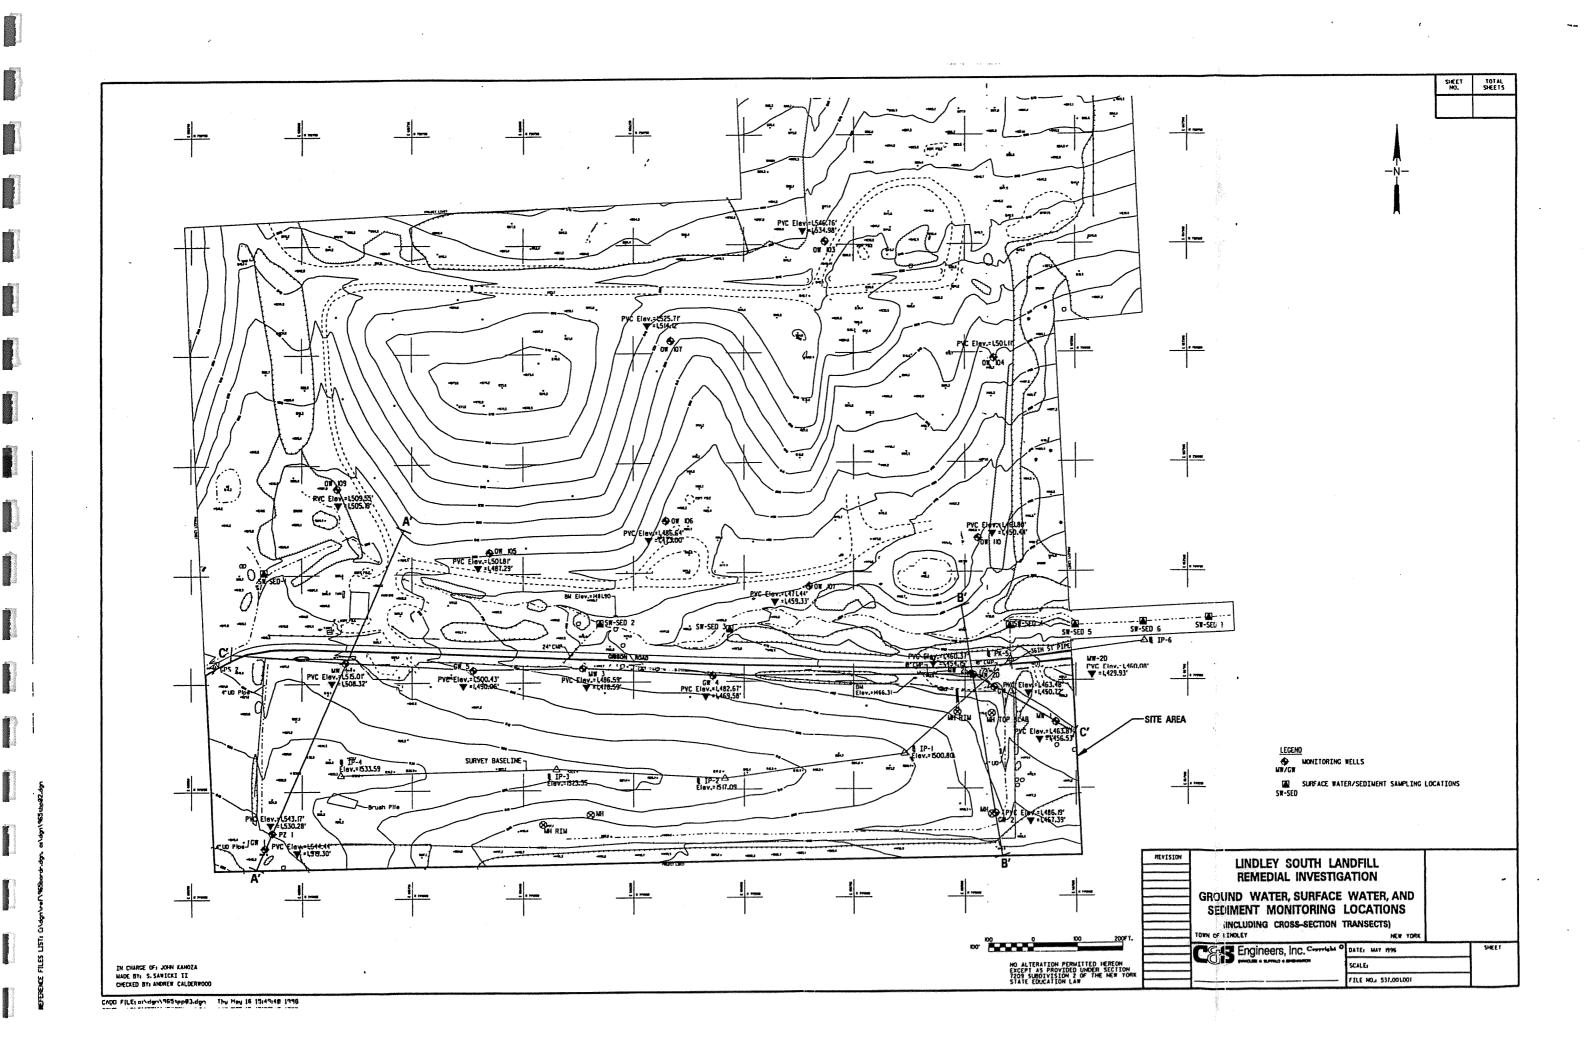


FIGURE - 2

D

 $\square D$

D

Ĺ

Í

Ń

Í

ENVIRONMENTAL MONITORING PLAN

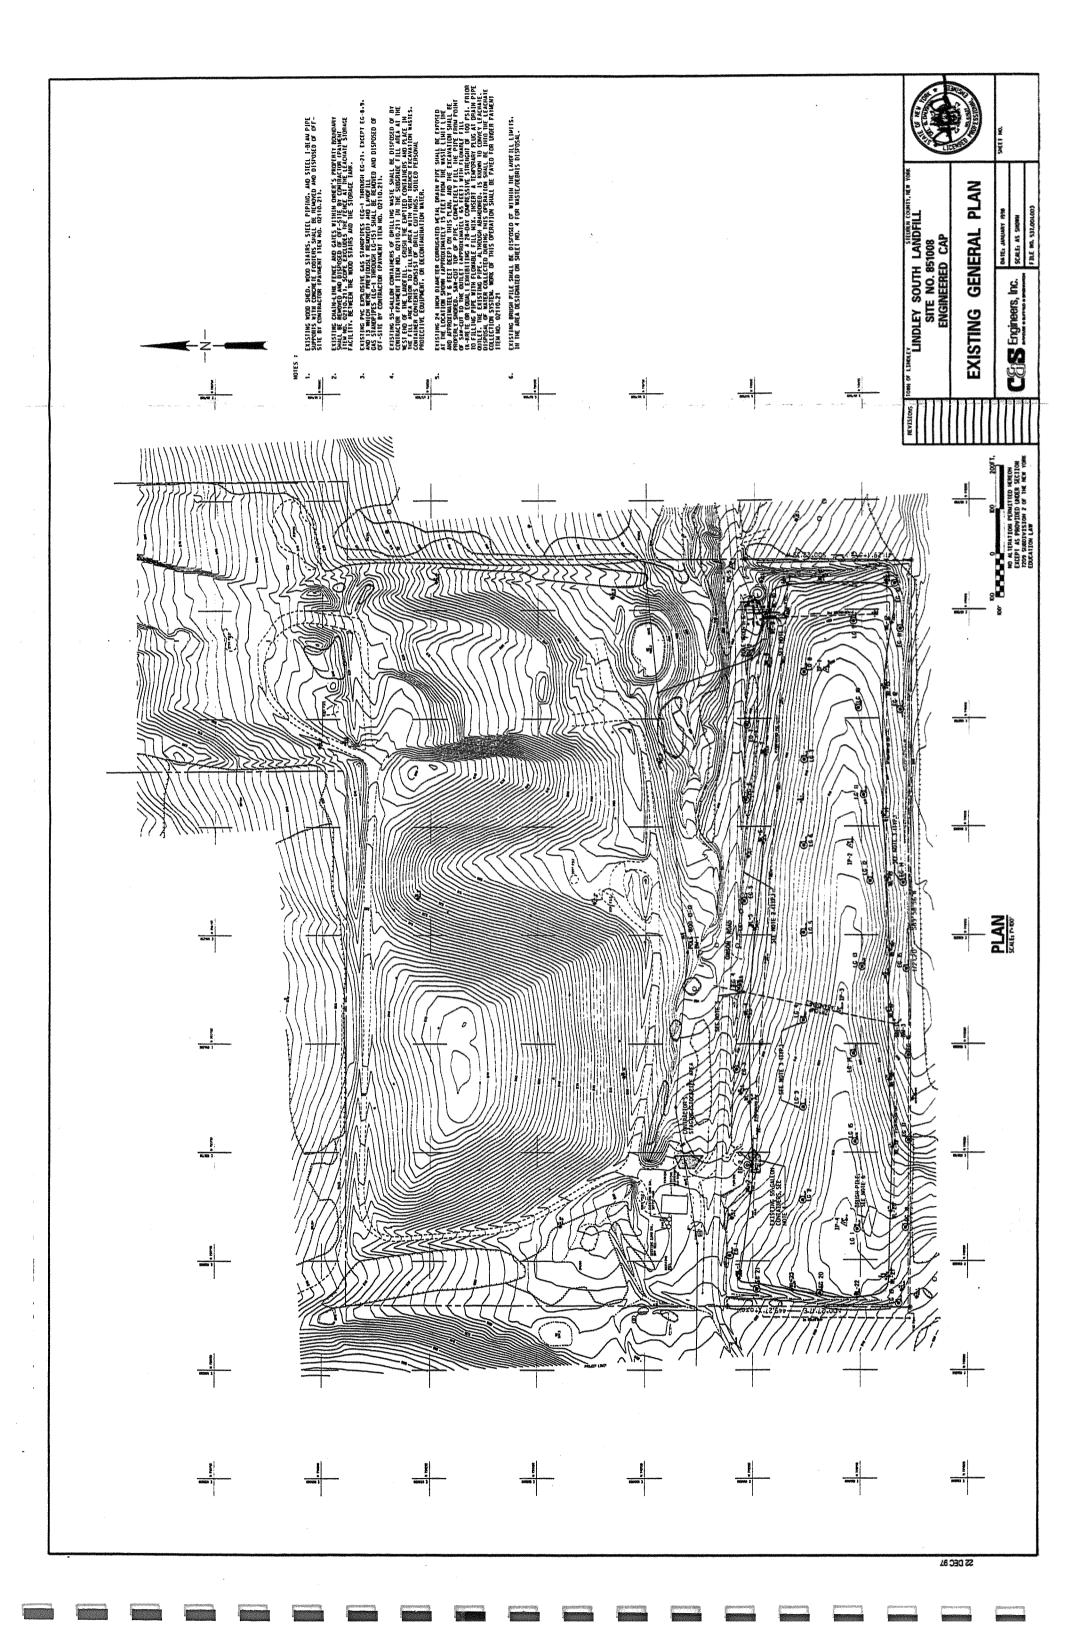


FIGURE - 2A

Ń.

ľ

D

Ď

ſ,

Ĺ

Í

Ď

LANDFILL GAS MONITORING PLAN

.

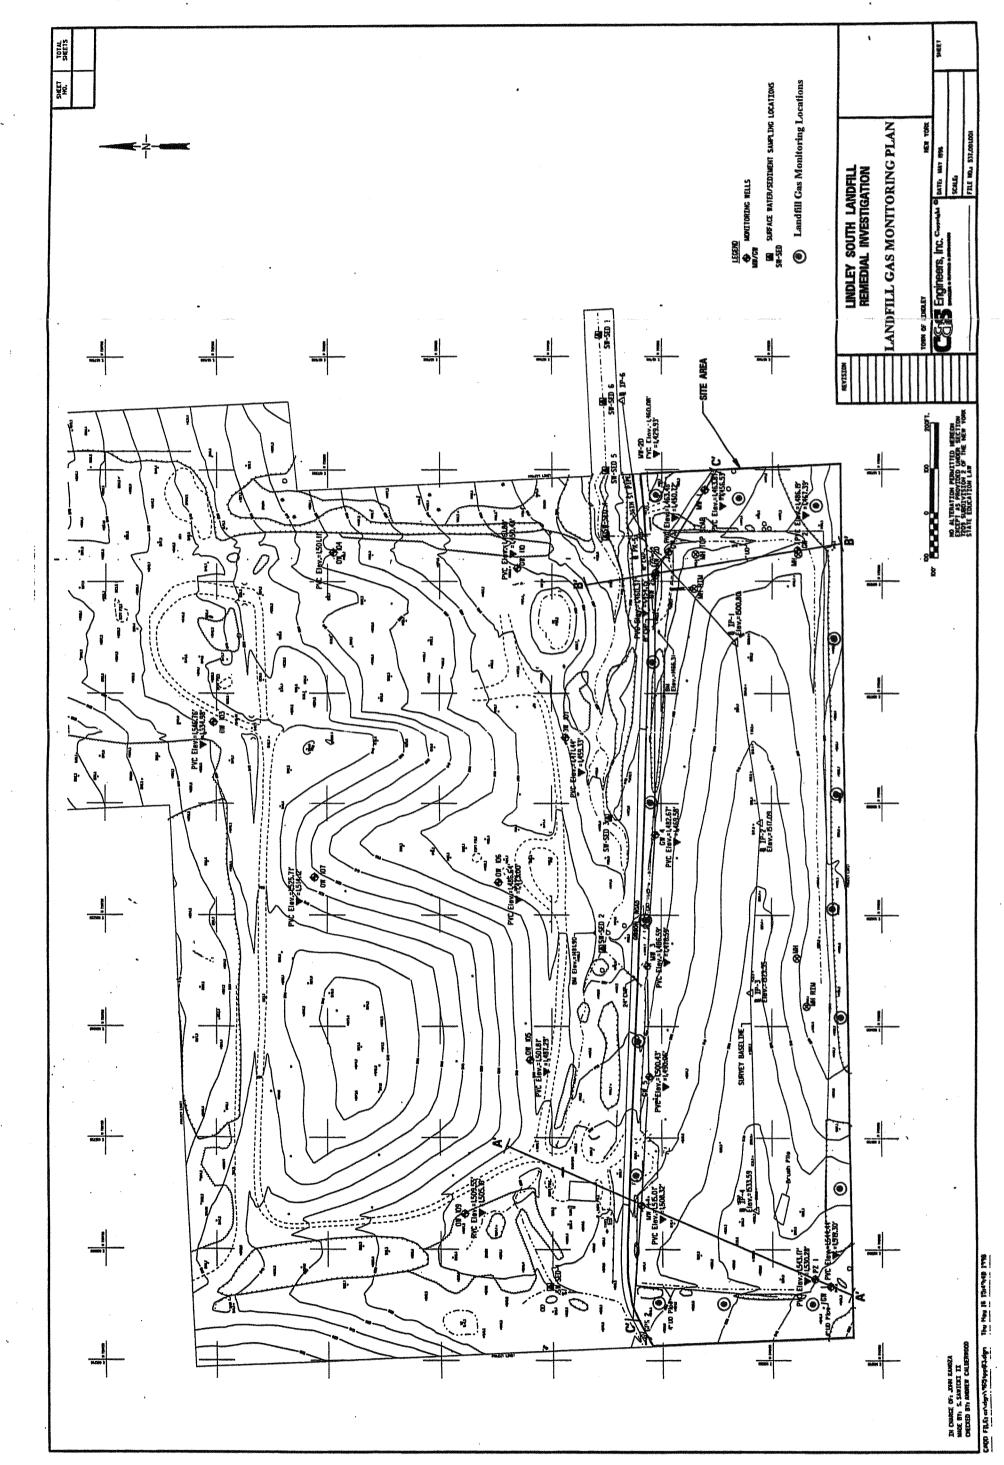




FIGURE - 3

Í

E

Í.


Ď

Ń

Í.

Ń

RESIDENTIAL WATER WELL PROPERTY LOCATIONS

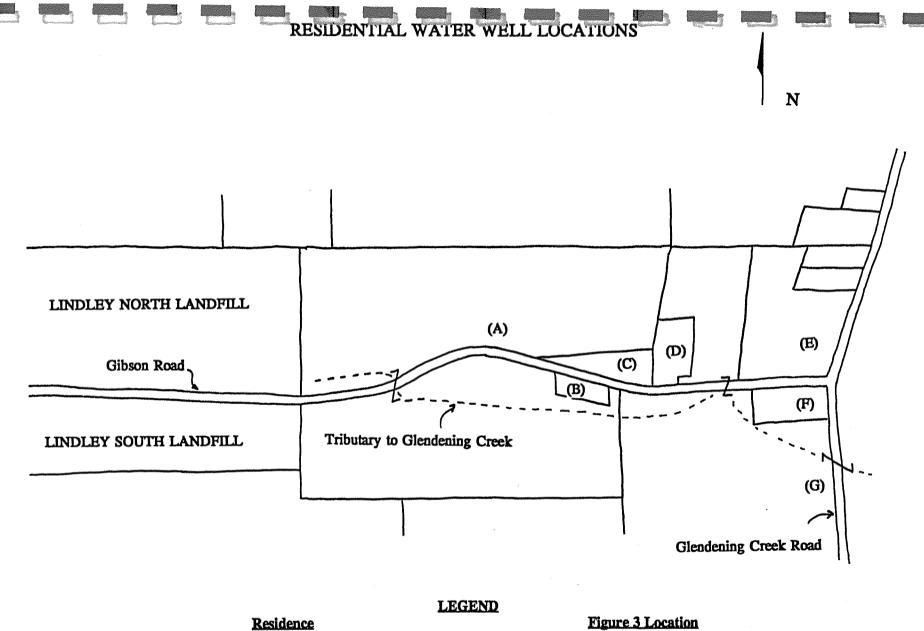

Residence	Figur
Judy Randall (well depth $=105'$)	
Hammond Sly	
Joe Hale (well depth $= 176'$)	
Terrance Rhodes (well depth =250')	
John & Pat Errington (well depth = 170')	
Dave & Nancy Fuller	
William & Joyce Rhodes	

· . • •

A

BCDEFG


APPENDIX - A

a out outpersonality

-

1

Boring Logs and Health & Safety Plan



BORING LOGS

•


Ď

þ


Ď

Í.


Í

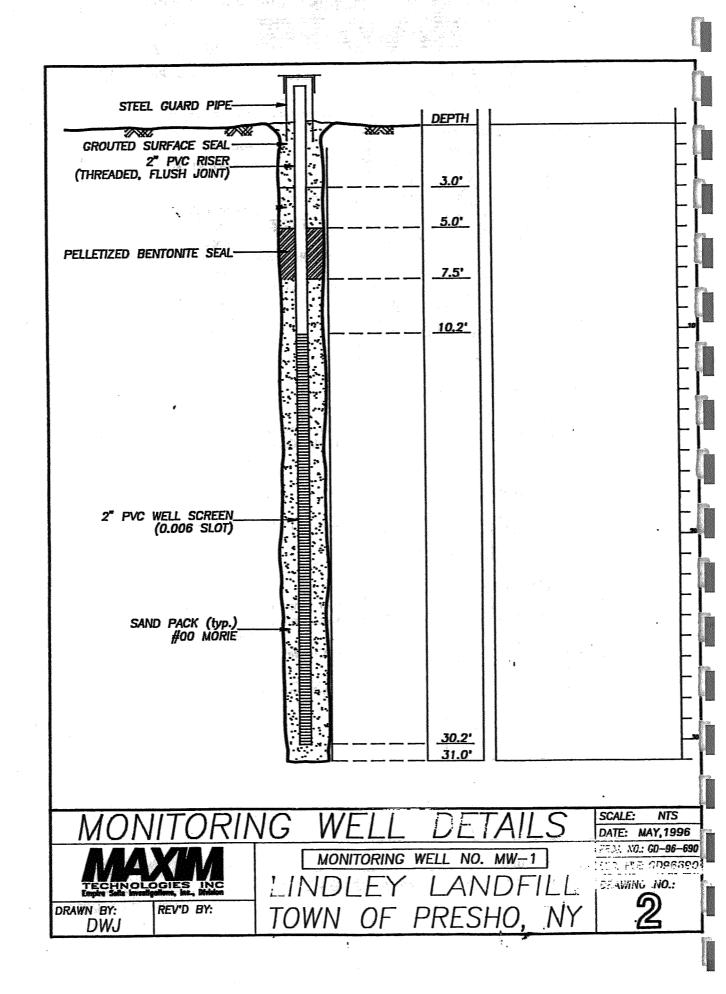


Ì

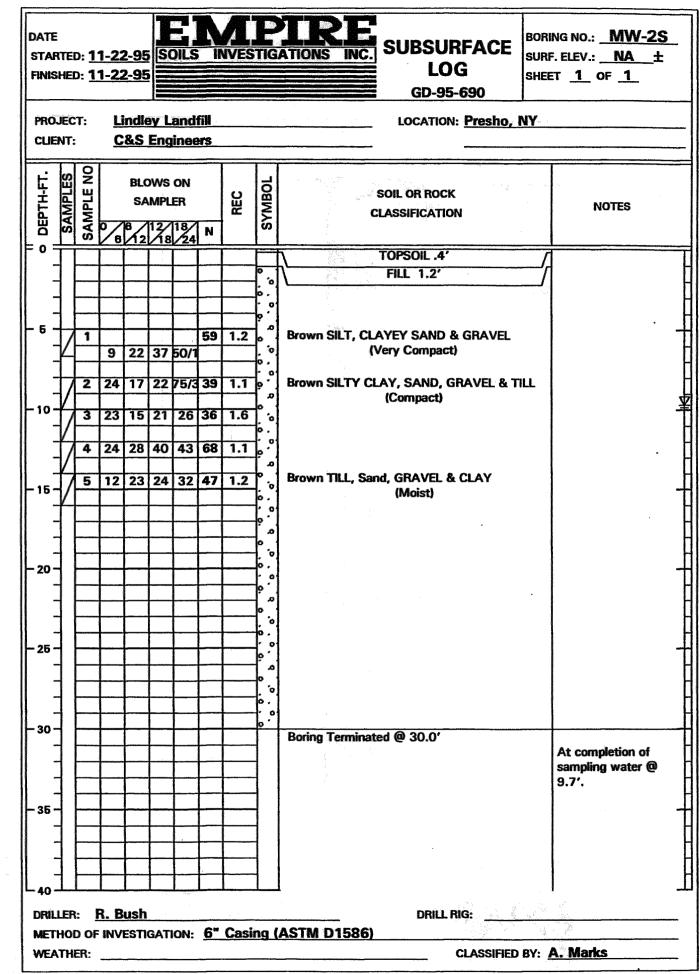

[a]a the the second se

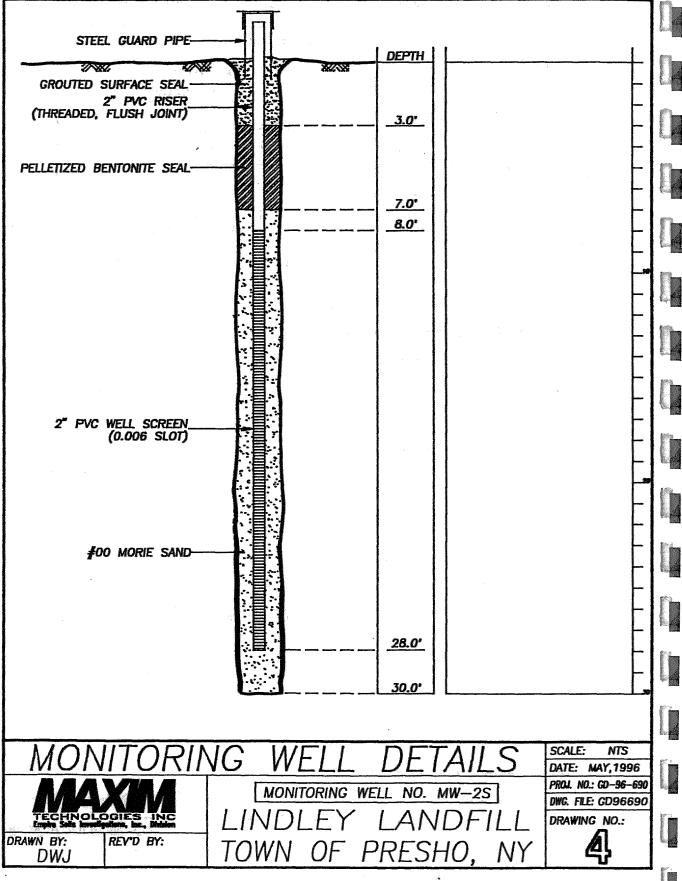



	10 6 17 22 1.2 0 CLAV changed to Light Grav 10 6 17 22 25 22 47 1.0 0 Brown CLAV, SILT, embedded GRAVEL. 10 7 32 56 35 41 91 7 0 Brown CLAV, SILT, embedded GRAVEL. 10 12 11 12 21<	
NOTES	5 O DEPTH-FT. SAMPLES SAMPLE NO SAMPLE NO SYMBOL Brown SILT, CLAY, GRAVEL (Loose) Firm-Moist (Loose) Very Compact Very Compact	
Boring No.: <u>MW</u> -2D Surf. Elev.: <u>NA</u> Sheet <u>1</u> of <u>3</u> VY	DATE EINISTICATIONS INC. SUBSURFACE BQ STARTED: 11-7-95 SOILS INVESTIGATIONS INC. SUBSURFACE SUBSURFACE	

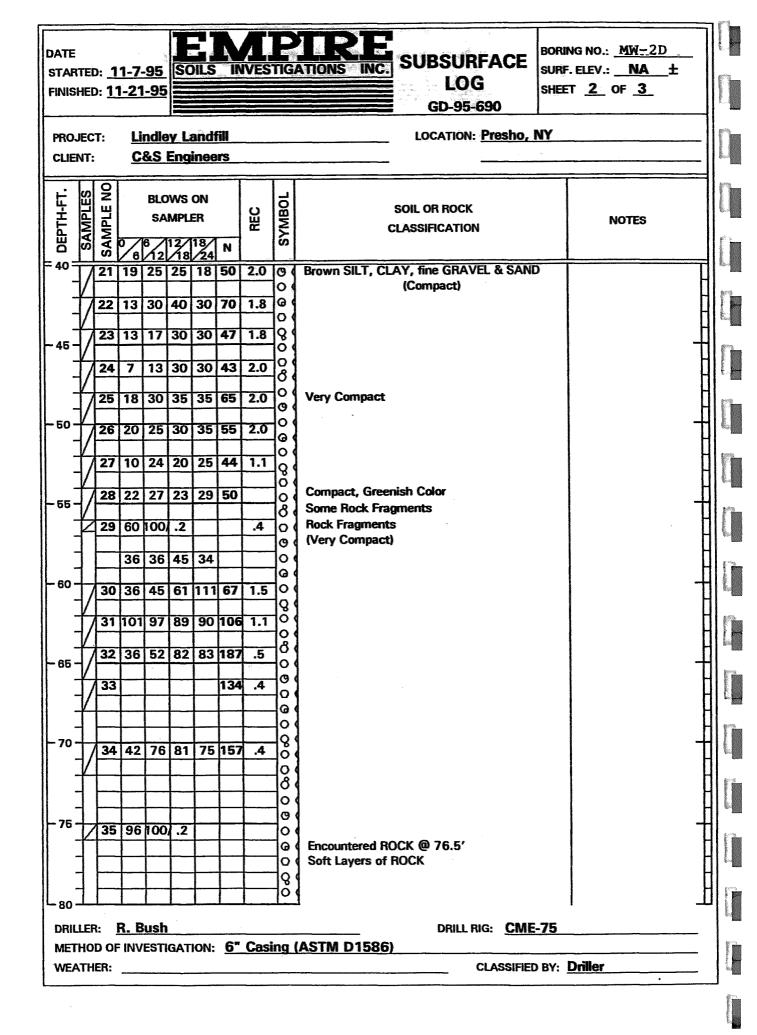


PRO CLIE	.41					and inee		19 X 12 B	. 1v -	GD-95-690 LOCATION: Presho, NY			
DEPTH-FT.	SAMPLES	MPLE NO	SAMPLER					REC	SYMBOL	SOIL OR ROCK CLASSIFICATION	NOTES		
ם 80:	1	SA	6	12	18	18/ /24	N						
- 00									00	RUN #1: 82'-84' RQD - 37.5%	0		
-			100/	.2						Rec. 4.7' Shale, Gray, medium hard to soft			
-	1							÷	0	RUN #2: 87'-92'			
- 85 -	1								18	RQD - 91.2% Rec. 5.0' Shale, medium Gray medium hard			
-	$\left \right $								8	RUN #3: 92'-97'			
-	1								00	RQD - 44.0% Rec. 5.0' Shale @ 94.3'			
- - 90 -	1								6				
			 			 			6		4		
-									10	5			
-	1								8				
- 96 -	1								0				
			ļ	ļ	 	 	L		<u>]</u> 8				
-	$\left \right $								10	Boring Terminated @ 97.0'			
-	1								1				
-100-									1		With casing @ 82', waterlevel @ 30.5'		
•									1				
]		ate		
-105	4				ļ	<u> </u>	<u> </u>	İ	4				
	+								1				
•	1								1				
-110	4	 	<u> </u>	 	 	<u> </u>	<u> </u>	<u> </u>	4				
	-		┼	<u> </u>		┼──	<u> </u>	 	+				
	1	 	+	<u> </u>		1			1	$\frac{1}{2} \sum_{i=1}^{n} \frac{1}{2} \sum_{i=1}^{n} \frac{1}$			
]]				
-115	-	<u> </u>	 	ļ	 	┝──	ļ	ļ	4				
	-	 	<u> </u>	┣	┞		┣—	 	-				
	4	}	+	┼──	┟──	┼──	├	1	1				
•].	· - 5.5]				
-120			1										


Ð

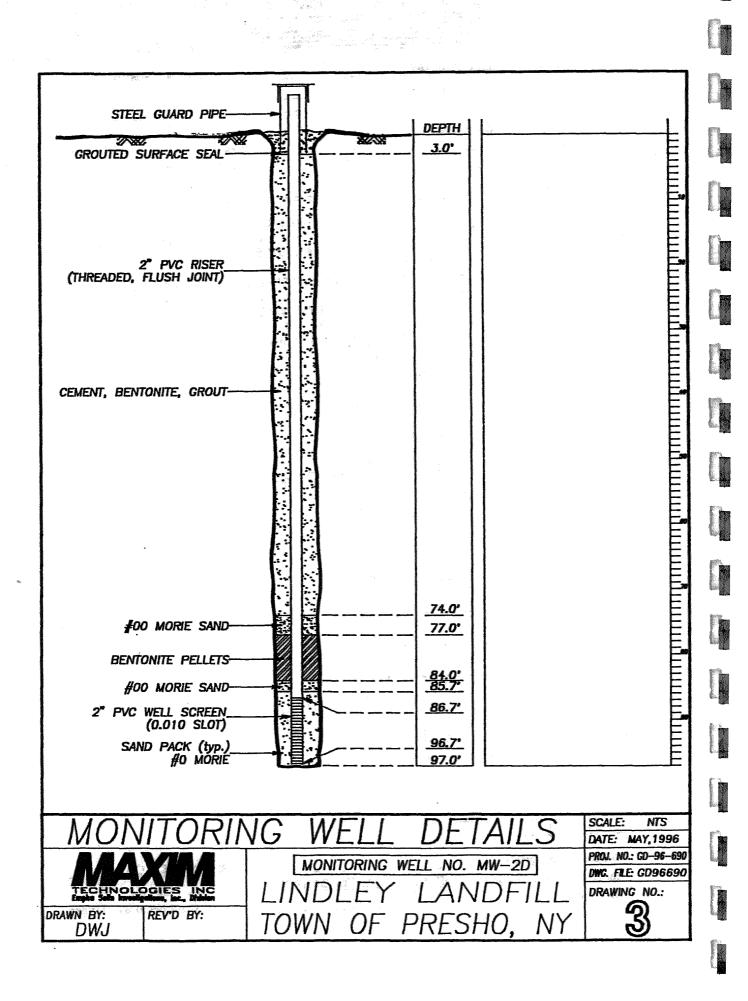

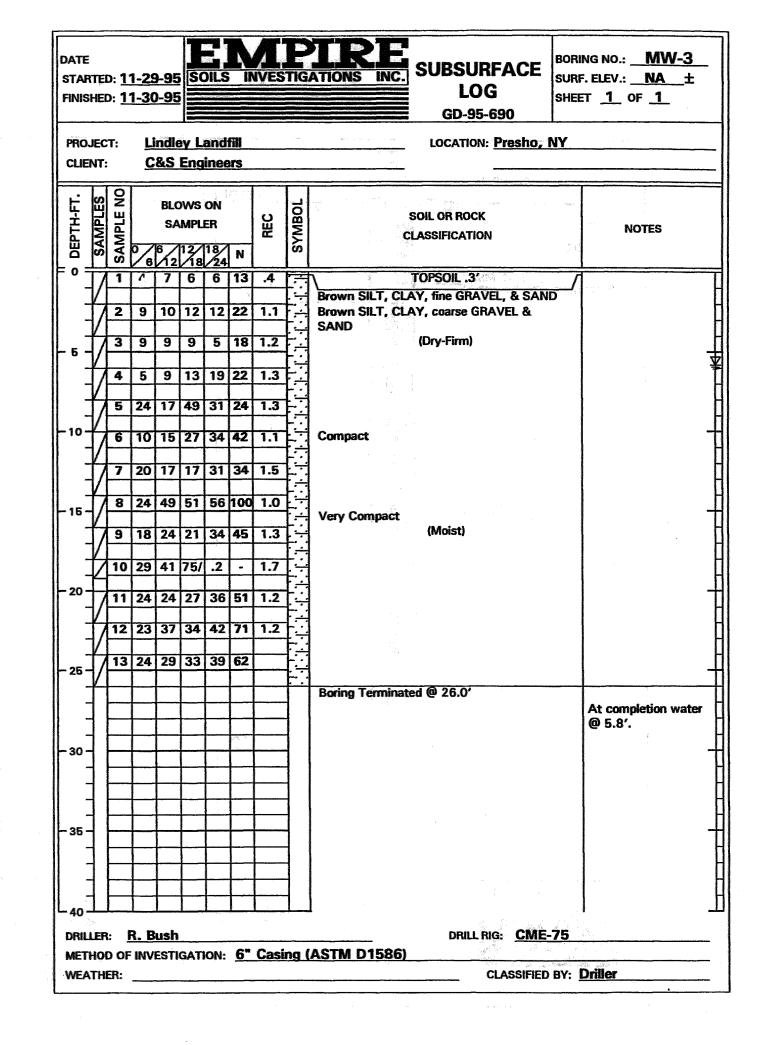


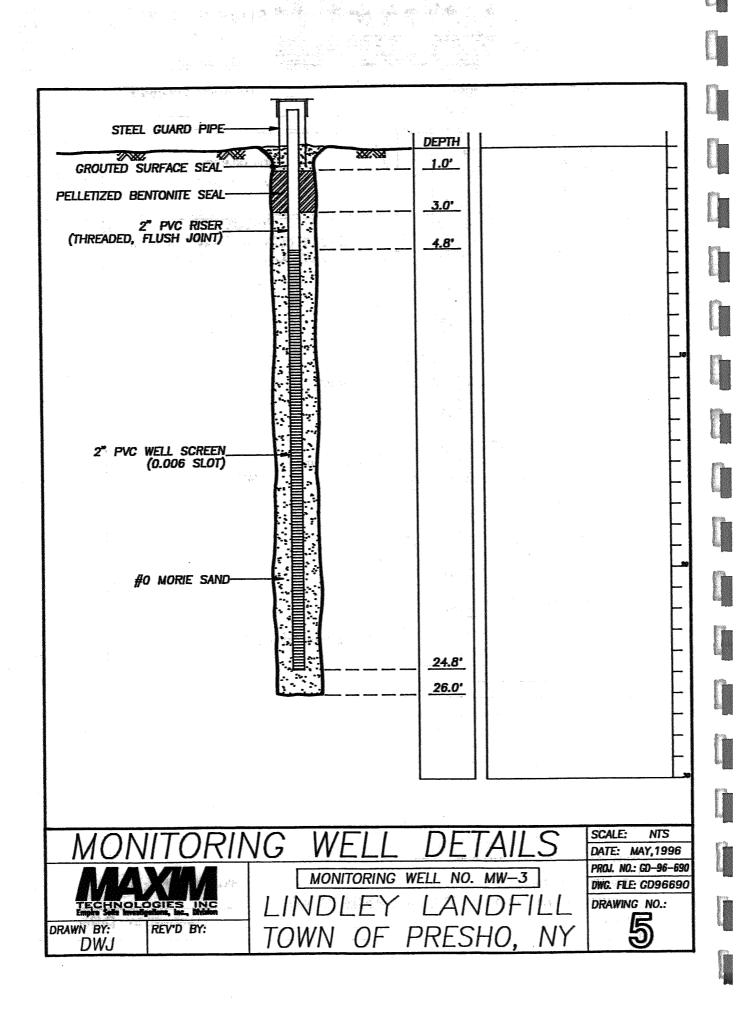


driller: <u>R.</u> Method of In Weather:		- 20 - 11 20 - 11 22 - 12 20 - 25 - 13 10	-10 - 6 23 -16 - 10 -16 - 8 28 -16 - 9 12	▲ W N →	DEPTH-FT.	FINISHED: 11-28-95 FROJECT: Lindle CLIENT: C&S I
driller: <u>R. Bush</u> Method of Investigation: <u>6" Casing</u> Weather:		20 20 29 28 49 1.0 22 25 14 21 39 .8 20 30 25 18 55 1.0 10 9 11 15 20 .8	13 13 17 39 1.2 30 27 37 57 1.3 13 13 17 26 1.2 13 13 17 26 1.2 31 22 27 53 1.5 25 17 23 42 -	2 3 3 4 6 1.1 5 17 16 15 33 1.3 14 14 13 12 27 1.5 23 30 27 37 25 1.5	AMPLER 12 118 18 24 N REC	28-95
Casing (ASTM D1586) Casing (ASTM D1586) CLASSIFIED BY:	Boring Terminated @ 27.0'	Brown CLAY, SILT, SAND & GRAVEL (Compact)	Brown SILTY CLAY, TILL Wet	TOPSOIL .3' Brown SILT, CLAY, SAND & GRAVEL (Loose) SILTY, SAND GRAVEL & CLAY (Firm)		LOG GD-95-690 LOCATION: Presho, NY
75 Bř: Driller	 With hole @ 16.0', waterlevel @ 5.8'.				NOTES	SHEET <u>1</u> OF <u>1</u>

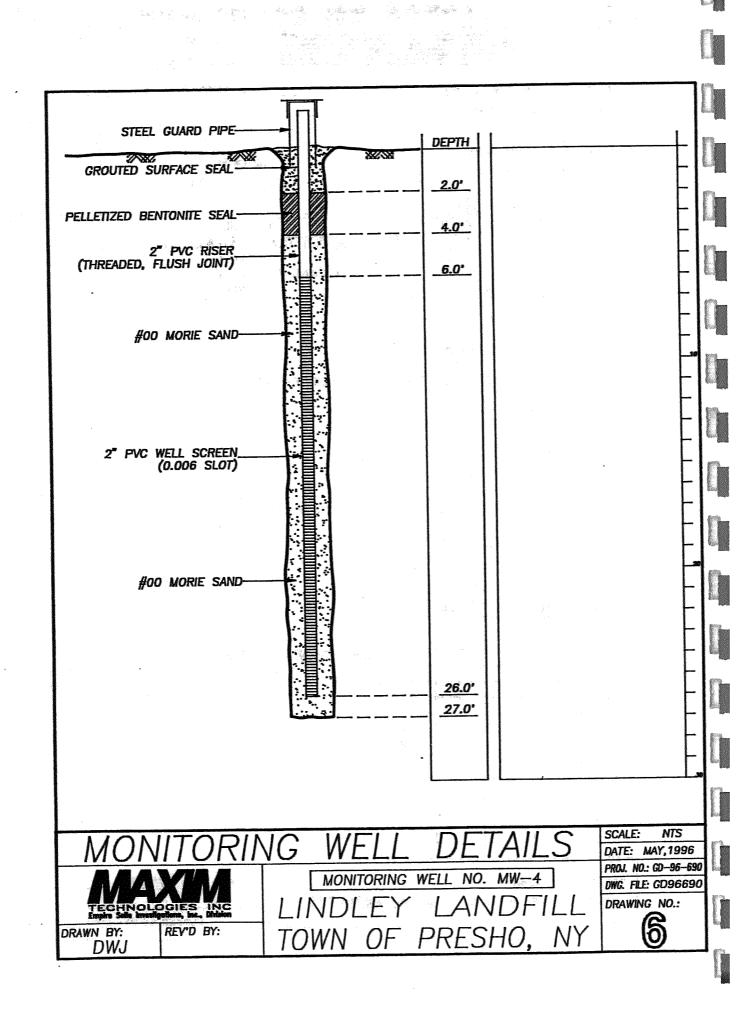

 $\mathbf{v}_{i_{j}}^{i_{j}} \in \mathbb{R}^{n_{i_{j}}}_{p_{i_{j}}} \times \mathbb{R}^{n_{i_{j}}}_{p_{i_{j}}}$

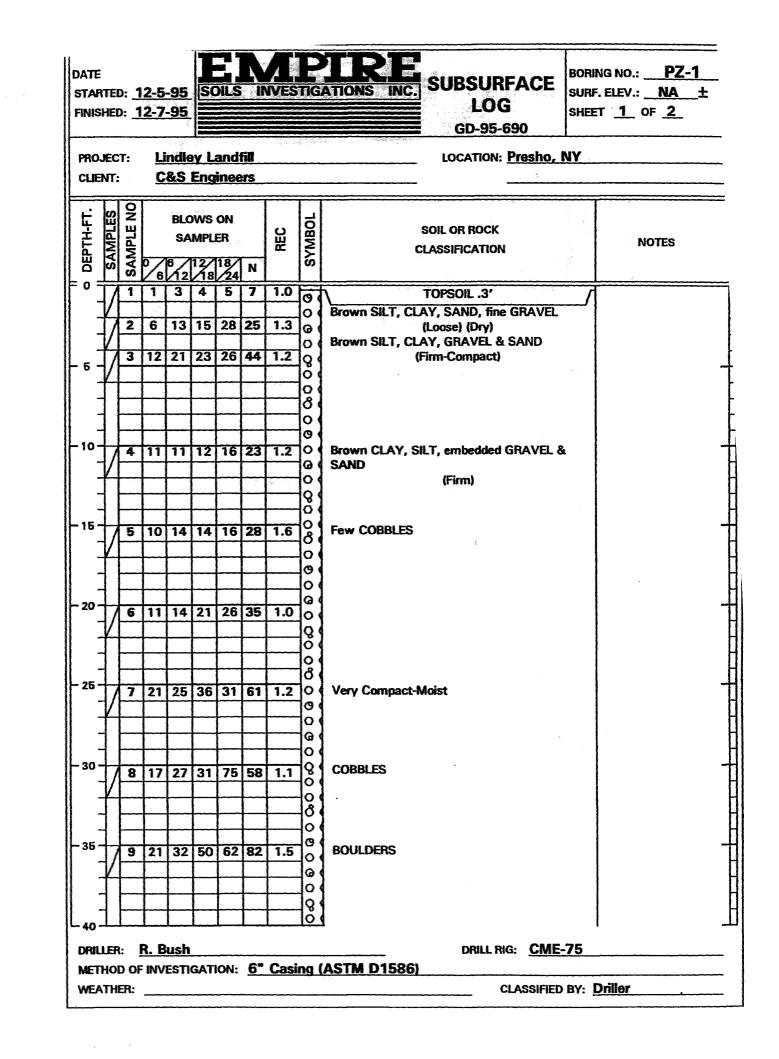

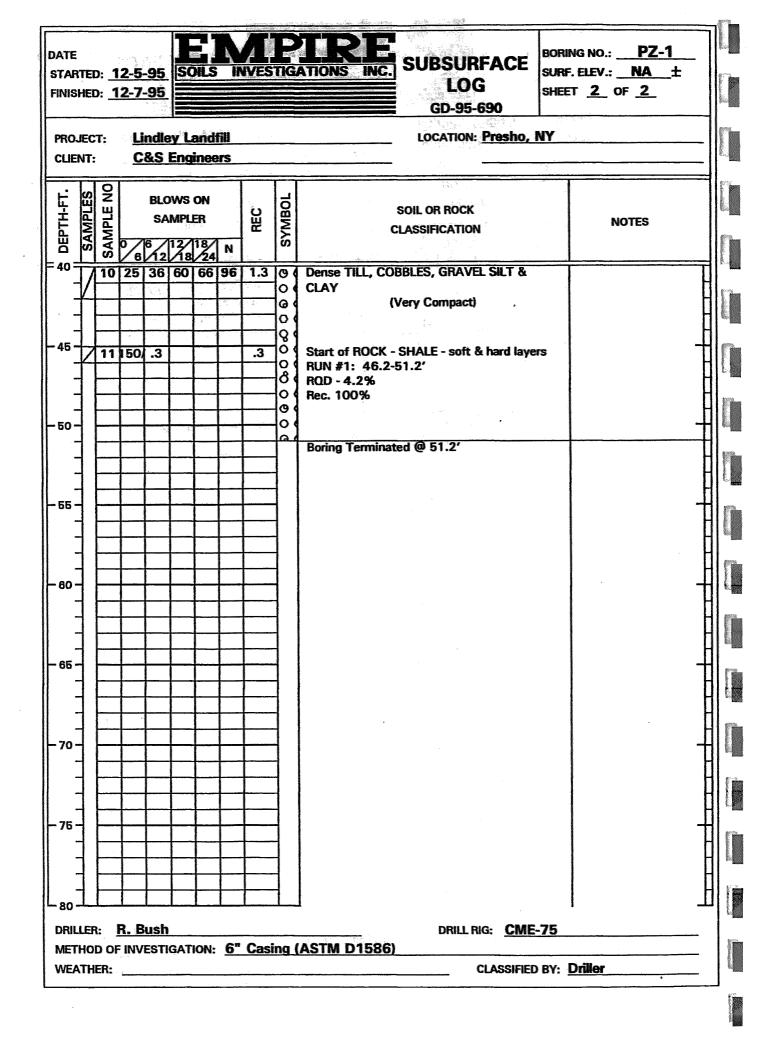

	1LS scale: NTS Date: May, 1996 Prou. No.: 60-96-690 DING. FILE: 6096690 DING. FILE: 6096690 DING. RUE: 00.:
STEEL GUARD PIPE DEFTH GROUTED SURFACE SELL JOETH CROUTED SURFACE SELL JOETH PELLITIZED BENTONIE SELL JOE PELLITIZED BENTONIE SELL JOE POO NORE SUND JOE	PIEZOMETER DETAI MAXM ELECTIVOLEY LA UD DWU BY: REV'D BY: TOWN OF PRESHU

HEALTH & SAFETY PLAN

.

Í.

[]

NOTIFICATION OF APPLICABILITY

The following Health and Safety Plan was prepared by C&S Engineers, Inc., in May 1998 for their employees and certified specifically for the administration and inspection of the Lindley South Landfill closure construction performed from June 1998 through October 1998.

Future activities at the site must be performed in accordance with individual site-specific Health and Safety Plans prepared by each contractor entering the site. The use of any portion of the following Health and Safety Plan in connection with any such future activity, or incorporation of any part of this plan into any other document without the express written consent of C&S Engineers, Inc., is strictly prohibited.

C \$ 5 Engineers, Inc. 5-10-99

A - 1



Engineers, Inc.

LINDLEY SOUTH LANDFILL ENGINEERED CAP STEUBEN COUNTY, NEW YORK

HEALTH AND SAFETY PLAN

٢

- 1

MAY 1998

Michel

Michael L. Howe, CIH

LINDLEY SOUTH LANDFILL ENGINEERED CAP STEUBEN COUNTY, NEW YORK

P

Ê

R.

HEALTH AND SAFETY PLAN

C&S ENGINEERS, INC. 1099 AIRPORT BOULEVARD NORTH SYRACUSE, NEW YORK 13212 (315) 455-2000

MAY 1998

TABLE OF CONTENTS

Page No.

.

SECTION 1 — GENERAL INFORMATION	1
 SECTION 2 — HEALTH AND SAFETY PERSONNEL 2.1 Health and Safety Personnel Designations 2.2 Project Manager (PM) 2.3 Health and Safety Officer (HSO) 2.4 Emergency Coordinator 	2
SECTION 3 — PERTINENT SITE INFORMATION	2
SECTION 4 – HAZARD ASSESSMENT AND HAZARD COMMUNICATION	3
 SECTION 5 — TRAINING 5.1 Basic Training Required 5.2 Advanced Training 5.3 Site-Specific Training 5.4 Safety Briefings 5.5 First Aid and CPR 	5
SECTION 6 – ZONES 6.1 Site Zones 6.1.1 Work Zone (Exclusion Zone) 6.1.2 Contamination Reduction Zone 6.1.3 Support Zone	6
SECTION 7 — PERSONAL PROTECTIVE EQUIPMENT 7.1 General 7.2 Personal Protective Equipment - Specific	7
 SECTION 8 — MONITORING PROCEDURES 8.1 Monitoring During Site Operations 8.2 Personnel Monitoring Procedures 8.3 Medical Surveillance Procedures for Evidence of Personal Exposure 8.4 Heat Stress Monitoring 	9
SECTION 9 – COMMUNICATIONS	9
SECTION 10 — SAFETY CONSIDERATIONS FOR SITE OPERATIONS 10.1 General 10.2 Field Operations 10.2.1 Intrusive Operations 10.2.2 Excavation Trenching	9

TABLE OF CONTENTS

Page No.

ECTION 11 - DECONTAMINATION PROCEDURES 11
ECTION 12 — DISPOSAL PROCEDURES
SCTION 13 – EMERGENCY PLAN 13 13.1 Emergency Coordinator 13.2 Evacuation 13.2 Evacuation 13.3 Potential or Actual Fire or Explosion 13.4 Environmental Incident (spread or release of contamination) 13.5 Personnel Injury 13.6 Personnel Exposure 13.7 Adverse Weather Conditions
13.7 Adverse weather Conditions 13.8 Incident Investigation and Reporting
ECTION 14 COMMUNITY RELATIONS
$\mathbf{ECTION} \ 15 - \mathbf{AUTHORIZATIONS} \ 14$

APPENDICES

APPENDIX A — ANALYTICAL DATA

APPENDIX B — MATERIAL SAFETY DATA SHEETS (MSDS)

APPENDIX C — GUIDANCE ON HEAT STRESS CONTROL

APPENDIX D — GUIDANCE ON SITE COMMUNICATIONS

APPENDIX E --- GUIDANCE ON EXCAVATION/TRENCHING OPERATIONS

APPENDIX F - GUIDANCE ON INCIDENT INVESTIGATION AND REPORTING

SECTION 1 – GENERAL INFORMATION

The Health and Safety Plan (HASP) described in this document will address health and safety considerations for all those activities that personnel employed by C&S Engineers, Inc., may be engaged in during construction of the engineered cap at the Lindley South Landfill in Steuben County, New York, and will be implemented by the Health and Safety Officer (HSO) during site work.

Compliance with this HASP is required of all C&S personnel who enter this site. The content of the HASP may change or undergo revision based upon additional information made available to the health, safety, and training (H&S) committee, monitoring results or changes in the technical scope of work. Any changes proposed must be reviewed by the H&S committee. This HASP was written specifically for those employees of C&S Engineers, Inc., and is not intended for use by others.

The construction contractor for the project is Tug Hill Construction, Inc., of Felts Mills, New York. All site control and project safety issues shall be coordinated through the construction contractor.

Responsibilities

Project Manager: Work Phone: (315) 455-2000

Site Health and Safety Officer: Work Phone: (607) 523-8873

Emergency Coordinator: Work Phone: (607) 523-8892 James Dickens (C&S Engineers, Inc.)

John Virginia (C&S Engineers, Inc.)

John Virginia (C&S Engineers, Inc.)

Emergency Phone Numbers

 Fire Department:
 (607)-937-5403

 Ambulance:
 (607)-936-4177

 Police:
 (607)-962-2112

 Hospital:
 (607)-937-7265

 (607)-737-7806
 (607)-737-7806

 Poison Control Center:
 (800) 822-9761

 Oil Spills and Hazardous Material Spills:
 (800) 457-7362

SECTION 2 — HEALTH AND SAFETY PERSONNEL

2.1 Health and Safety Personnel Designations

The following information briefly describes the health and safety designations and general responsibilities which may be employed for the Lindley South Landfill engineered cap construction project.

2.2 Project Manager (PM)

The PM is responsible for the overall project including the implementation of the HASP. Specifically, this includes allocating adequate manpower, equipment, and time resources to conduct site activities safely.

2.3 Health and Safety Officer (HSO)

The HSO is the person on-site responsible for assuring that personnel under direction comply with the requirements of the HASP and that personal protective equipment needed for site work is available.

2.4 Emergency Coordinator

The Emergency Coordinator is responsible for implementation of the Emergency Plan as presented in Section 13 of this HASP, establishment and supervision of the emergency response team, and conducting training programs for personnel assigned duties on the emergency response team.

SECTION 3 — PERTINENT SITE INFORMATION

3.1 Site Description

The Town of Lindley Landfill is a total of 123 acres in size and is located in the Town of Lindley, Steuben County, New York. The Lindley South Landfill is a 16 acre section of the overall landfill, situated on the south side of Gibson Road and approximately 4,000 feet west of Glendenning Creek Road.

The engineered cap construction project is a heavy civil construction project involving the installation of a synthetic liner cover, a gas venting system, and soil protective/topsoil layers. The project includes the installation of a gravel service road and a perimeter fence.

3.2 Site History

Waste disposal operations began at the Lindley South Landfill in 1977. Disposal methods were reportedly with written approval of NYSDEC and generally in accordance with accepted practices at that time. Municipal solid waste material was accepted at the site from 11 towns within Steuben County between 1977 and 1983. In addition to municipal waste material, industrial waste was

reportedly disposed of by the Corning Glass Works Company during 1979 and 1980, including lead fines, calcium fluoride sludge, and asbestos material. All landfill activities were stopped at the site in 1983 when the maximum capacity of the landfill was reached. Upon completion of the landfill activity, a 2 foot thick cap of natural material from the site was placed and seeded.

Although the landfill is unlined and there were no leachate collection, removal, or storage provisions incorporated into the landfill's original construction, a retrofitted leachate collection and storage system was installed in 1986. The system consists of 8-inch diameter perforated PVC piping enclosed in crushed stone buried within the waste mass along the North and East edges of the landfill, and interconnecting with the existing French drain system previously installed in 1978 along the south side of the landfill.

As a result of a Phase II site investigation completed in 1990, which identified potential leachate contamination and migration proximate to the site, the Lindley South Landfill was subsequently classified by the NYSDEC as a Class 2 Site (Site No. #851008) on the New York State Registry of Inactive Hazardous Waste Sites. In April 1995, Steuben County entered into an Order on Consent for the completion of a Remedial Investigation/Feasibility Study and appropriate remedial efforts at the site. This project is being performed as a result of the Remedial Investigation/Feasibility Study findings.

SECTION 4 – HAZARD ASSESSMENT AND HAZARD COMMUNICATION

The most likely routes of exposure during construction activities include skin absorption and inhalation due to exposure to leachate and gases, and limited exposure to waste, during site intrusive activities. The chemical hazards which may be associated with site activities were determined through examination of historical analytical data from groundwater, surface water, sediments, leachate, and air emission samples. A copy of the analytical data is presented in Appendix A and available Material Safety Data Sheets (MSDS) for these parameters are provided in Appendix B.

Mechanical hazards associated with heavy equipment must be recognized at the site. Additionally, physical hazards must be recognized. The ground surface may be littered with sharp objects such as scrap metal and glass, and the possibility of tripping or falling exists in most areas. During warm weather, contacts with vectors such as bees or wasps is also a concern.

It is assumed that site workers have the potential to be exposed to concentrations of hazardous substances. Relatively low concentrations of several hazardous substances have been identified in various media samples obtained from the site, including leachate, sediments, groundwater, surface water, and air. It is difficult to draw a correlation between the concentrations of contaminants found in one media and the potential for exposure to these contaminants to site workers. However, their presence may indicate that some potential for exposure to these compounds exist, and the requirements for protective measures and monitoring of exposure is based on this potential. Pertinent information regarding various hazardous substances identified is discussed below.

Benzene, CAS number 71-43-2—Benzene in its pure form is a colorless liquid with an aromatic odor. It is flammable and highly toxic. It is not expected that benzene will be present in a pure form but rather in low concentrations in the parts per billion range in the landfill. Benzene is classified as a potential human carcinogen be the American Conference of Governmental Hygienists (ACGIH). Exposure occurs primarily by inhalation and by skin absorption to a lesser degree. The federal Occupational Safety and Health Administration (OSHA) regulates worker exposure to benzene. Employers must assure that no employee is exposed to an airborne concentration of benzene in excess of one part of benzene per million parts of air (1 ppm) as an 8-hour time weighted average (TWA). In addition, no employee shall be exposed to an airborne concentration of benzene in excess of five (5) ppm as averaged over any 15 minute period. This limit is referred to as the Short-term Exposure Limit (STEL).

Toluene, CAS number 108-88-3—Toluene is a colorless liquid with an odor similar to benzene. It is flammable with explosive limits in air of 1.1 - 7.1%. It is toxic by inhalation, ingestion and skin absorption. Exposure to high concentrations in air cause central nervous system depression. It is expected that if toluene is present, it will be in low concentrations in the parts per billion range in the landfill. OSHA limits airborne exposure to 200 ppm as an eight hour TWA and to 300 ppm as a ceiling limit. OSHA has also established a 500 ppm 10-minute maximum peak. The ACGIH recommends that exposure be limited to 50 ppm as an eight-hour TWA.

Methylene Chloride, CAS number 75-09-2—(synonym: dichloromethane) Methylene Chloride is a colorless, volatile liquid with a penetrating ether-like odor. It is an eye, skin, and respiratory tract irritant. It is also a mild central nervous system depressant with exposure generally occurring through inhalation. Methylene chloride is a suspected human carcinogen. OSHA limits exposure to 25 ppm as an eight-hour TWA, and to 125 ppm as a STEL. The ACGIH recommends that exposure be limited to 50 ppm as an eight-hour TWA. If methylene chloride is present at the landfill, the airborne concentrations are expected to be very low or not detectable.

Trichloroethene, CAS number 79-01-6—(synonym: Trichloroethylene) Trichloroethene is a nonflammable mobile gas with a characteristic odor resembling that of chloroform. Moderate exposure can cause symptoms similar to alcohol inebriation. High concentrations of Trichloroethene can cause a narcotic effect. Trichloroethane has been found to induce hepocellular carcinomas. Heavy exposure has also been found to cause death by ventricular fibrillation. OSHA limits exposure to 100 ppm as an eight-hour TWA, with a ceiling limit of 200 ppm and a 300 ppm 5-minute maximum peak in any two hour period. ACGIH recommends exposure be limited to 50 ppm as an eight-hour TWA.

1,2-Dichloroethane, CAS number 107-06-2—(synonym: Ethylene Dichloride) 1,2-Dichloroethane has a characteristic pleasant odor and a sweet taste. Vapors of 1,2-Dichloroethane have been found to be irritating to the lungs and eyes and may disturb balance cause abdominal cramping. This substance has been listed as a carcinogen by the USEPA. OSHA limits exposure to 50 ppm as an eight-hour TWA, with a ceiling limit of 100 ppm and a 200 ppm 5-minute maximum peak in any three hour period. ACGIH recommends exposure be limited to 10 ppm as an eight-hour TWA.

Acetone, CAS number 67-64-1 (synonym - dimethylketone; 2-propanone). Acetone is a colorless

volatile liquid with a pungent odor and sweetish taste. Acetone is extremely flammable and is considered a fire risk and is generally characterized by low to moderate toxicity by ingestion and inhalation. Prolonged or repeated topical use may cause dryness. Inhalation may produce headache, fatigue, excitement, bronchial irritation, and in large amounts narcosis. OSHA limits exposure to 1000 ppm as an eight-hour TWA. ACGIH recommends exposure be limited to 500 ppm as an eight-hour TWA.

2-Butanone, CAS number 78-93-1 (synonym - methyl ethyl ketone). 2-Butanone is a colorless liquid with an acetone-like odor and is a narcotic by inhalation. 2-Butanone should be considered a fire risk. OSHA limits exposure to 200 ppm as an eight-hour TWA.

Tetrachloroethene, CAS 127-18-4—(synonym: Tetrachloroethylene). Tetrachlorethane is a colorless nonflammable liquid with a an ethereal odor. In high concentrations tetrachlorethane can have a narcotic effect and can cause a defatting effect on the skin leading to dermatitis. OSHA limits exposure to 100 ppm as an eight-hour TWA, with a ceiling limit of 200 ppm and a 300 ppm 5-minute maximum peak in any three hour period. ACGIH recommends exposure be limited to 25 ppm as an eight-hour TWA.

PCB (Aroclor). PCBs are highly toxic colorless liquids. PCBs induce toxic effects in humans including chloracne, pigmentation of skin and nails, excessive eye discharge, swelling of eyelids, distinctive hair follicles, and gastrointestinal disturbances. PCB's have been listed as carcinogens by the USEPA and may also cause liver damage.

Cresol, CAS 1319-77-3—(synonym: 4 - Methylphenol). Cresol is a colorless or pinkish liquid with a sweet, tarry odor similar to phenol or creosote. It is eye, skin and respiratory tract irritant. It is a central nervous system depressant and a poison with exposure generally occurring through inhalation or skin absorption. OSHA limits airborne exposure to 5 ppm as an eight hour TWA. Exposure exceeding this limit may cause breathing difficulty, mental confusion and eventually lead to respiratory failure.

Lead, CAS 7439-92-1. Metallic lead is a heavy, ductile, soft gray solid. OSHA considers "Lead" to mean metallic lead, all inorganic lead compounds such as lead oxides and lead salts, and a class of organic lead compounds called soaps. All other organic lead compounds are excluded from this definition. Lead is a central nervous system poison with exposure generally occurring through inhalation or ingestion of lead bearing dusts. Symptoms of lead poisoning include weakness, insomnia, anemia, abdominal pain and tremors. OSHA limits exposure to lead to 0.050 mg/m³ as an eight hour TWA, and an action limit of 0.030 mg/m³.

SECTION 5 — TRAINING

5.1 Basic Training Required

Completion of the 40-hour Health and Safety Training for Hazardous Waste Operations and three days on the job training under the supervision of a qualified person is required for all employees who will

perform work in areas where the potential for a toxic exposure exists.

5.2 Advanced Training

Advanced training, as necessary, will be provided to any personnel who will be expected to perform site work utilizing Level A protection or other specialized operation to be undertaken at the site.

5.3 Site-Specific Training

Training will be provided that specifically addresses the activities, procedures, monitoring, and equipment for the site operations prior to going on site. Training will include familiarization with site and facility layout, known and potential hazards, and emergency services at the site, and details of the provisions contained within this HASP. This training will also allow field workers to clarify anything they do not understand and to reinforce their responsibilities regarding safety and operations for their particular activity.

5.4 Safety Briefings

C&S project personnel will be given briefings by the HSO on a daily or as needed basis to further assist site personnel in conducting their activities safely. Pertinent information will be provided when new operations are to be conducted. Changes in work practices must be implemented due to new information made available, or if site or environmental conditions change. Briefings will also be given to facilitate conformance with prescribed safety practices. When conformance with these practices is not being followed, or if deficiencies are identified during safety audits the project manager will be notified.

5.5 First Aid and CPR

The HSO will identify those individuals requiring this training in order to oversee emergency treatment if so required during field activities. It is expected that a selected number of field workers will have First Aid training and some members of the field team will have CPR training. These courses will be consistent with the requirements of the American Red Cross Association.

SECTION 6 — ZONES

6.1 Site Zones

Three types of site activity zones are identified for the engineered cap construction activities, including the Work Zone, Contamination Reduction Zone, and the Support Zone.

6.1.1 Work Zone (Exclusion Zone)

The Work Zone, or exclusion zone, is the area where contamination is known to be or likely to be present or area where activity is being conducted which has the potential to cause harm. The

Work Zone will be any area of intrusive activity. It is anticipated that the location of the Work Zone will change as construction activities progress. No one may enter the Work Zone without the necessary protective equipment and without permission from the HSO.

6.1.2 Contamination Reduction Zone

The Contamination Reduction Zone is the area where personal and equipment decontamination will be conducted.

6.1.3 Support Zone

The Support Zone is considered the uncontaminated area. This area may include the C&S trailer command post or pre-work area which will provide for communications and emergency response. Appropriate safety and support equipment also will be located in this zone.

SECTION 7 – PERSONAL PROTECTIVE EQUIPMENT

7.1 General

The level of protection to be worn by field personnel will be defined and controlled by the HSO. Depending upon the type and levels of waste material present at the site, varying degrees of protective equipment will be needed. If the possible hazards are unknown, a reasonable level of protection will be taken until sampling and monitoring results can ascertain potential risks. The levels of protection listed below are based on USEPA Guidelines. A list of the appropriate clothing for each level is also provided.

<u>Level A</u> protection must be worn when a reasonable determination has been made that the highest available level of respiratory, skin, eye, and mucous membrane protection is needed. It should be noted that while Level A provides maximum available protection, it does not protect against all possible hazards. Consideration of the <u>heat stress</u> that can arise from wearing Level A protection should also enter into the decision making process.

Level A protection includes:

- Open Circuit, pressure-demand SCBA
- Totally encapsulated chemical resistant suit
- Gloves, inner (surgical type)
- Gloves, outer, chemical protective
- Boots, chemical protective

<u>Level B</u> protection must be used when the highest level of respiratory protection is needed, but hazardous material exposure to the few unprotected areas of the body (i.e., the back of the neck) is unlikely.

Level B protection includes:

- Open circuit, pressure-demand SCBA or pressure airline with escape air bottle
- Chemical protective clothing: Overalls and long sleeved jacket; disposal chemical resistant coveralls; coveralls; one or two piece chemical splash suit with hood
- Gloves, inner (surgical type)
- Gloves, outer, chemical protective
- Boots, chemical protective

<u>Level C</u> protection will be used when the required level of respiratory protection is known, or reasonably assumed, to be not greater than the level of protection afforded by air purifying respirators; and hazardous materials exposure to the few unprotected areas of the body (i.e., the back of the neck) is unlikely.

Level C protection includes:

- Full or half face air-purifying respirator
- Chemical protective clothing: Overalls and long-sleeve jacket; disposable chemical resistant coveralls; coveralls; one or two piece chemical splash suit
- Gloves, inner (surgical type)
- Gloves, outer, chemical protective
- Boots, chemical protective

<u>Level D</u> is the basic work uniform. It cannot be worn on any site where respiratory or skin hazards exist.

Level D protection includes:

- Safety boots/shoes
- Safety glasses
- Hard Hat with optional face shield

Note that the use of SCBA and airline equipment is contingent upon the user receiving special training in the proper use and maintenance of such equipment.

7.2 Personal Protective Equipment - Specific

Level D with some modification will be required when working in the work zone on this site. In addition to the basic work uniform specified by Level D protection, chemical protective gloves with a surgical type inner liner will be required when contact with soil, leachate or landfill material is likely. An upgrade to a higher level (Level C) of protection may occur if determined necessary by the HSO.

SECTION 8 — MONITORING PROCEDURES

8.1 Monitoring During Site Operations

All site environmental monitoring and meteorological monitoring of climatic conditions will be performed by the construction contractor in accordance with Section 8 of the contractor's Site Specific Health and Safety Plan.

8.2 Personnel Monitoring Procedures

Monitoring of C&S personnel may be performed as a contingency measure in the event that VOC concentrations are consistently above the established action level for the project, as identified in the contractor's Site Specific Health and Safety Plan. If the concentration of VOCs is above this action level, then amendments to the HASP must be made before work can continue at the site.

8.3 Medical Surveillance Procedures for Evidence of Personal Exposure

All C&S Engineers Inc. personnel who will be performing field work at the site must be medically qualified. Additional medical testing may be required by the HSO in consultation with the company physician if an overt exposure or accident occurs, or if other site conditions warrant further medical surveillance.

8.4 Heat Stress Monitoring

It is anticipated that heat stress may be a concern. Guidance relating to heat stress control is presented in Appendix C of this HASP.

SECTION 9 – COMMUNICATIONS

A telephone will be located in the C&S trailer for communication with emergency support services/facilities. Guidance relating to site communications which may be implemented depending on conditions and circumstances is presented in Appendix D of this HASP.

SECTION 10 — SAFETY CONSIDERATIONS FOR SITE OPERATIONS

10.1 General

Standard safe work practices that will be followed include:

- Do not climb over/under drums, or other obstacles.
- Do not enter the work zone alone.

- Practice contamination avoidance, on and off-site.
- Plan activities ahead of time, use caution when conducting concurrently running activities.
- No eating, drinking, chewing or smoking is permitted in work zones.
- Due to the unknown nature of waste placement at the site, extreme caution should be practiced during excavation activities.
- Apply immediate first aid to any and all cuts, scratches, abrasions, etc.
- Be alert to your own physical condition. Watch your buddy for signs of fatigue, exposure, etc.
- A work/rest regimen will be initiated when ambient temperatures and protective clothing create a potential heat stress situation.
- No work will be conducted without adequate natural light or without appropriate supervision.
- Task safety briefings will be held prior to onset of task work.
- Ignition of flammable liquids within or through improvised heating devices (barrels, etc.) or space heaters is forbidden.
- Entry into areas of spaces where toxic or explosive concentrations of gases or dust may exist without proper equipment is prohibited.
- Any injury or unusual health effect must be reported to the site health and safety officer.
- Prevent splashing or spilling of potentially contaminated materials.
- Use of contact lenses is prohibited while on site.
- Beards and other facial hair that would impair the effectiveness of respiratory protection are prohibited.
- Field crew members should be familiar with the physical characteristics of the work, including:
 - Wind direction in relation to potential hazardous sources
 - Accessibility to co-workers, equipment, and vehicles
 - Communication
 - Hot Zones (areas of known or suspected contamination)
 - Site Access
 - Nearest water sources
- The number of personnel and equipment in potentially contaminated areas should be minimized consistent with site operations.

10.2 Field Operations

10.2.1 Intrusive Operations

An HSO or designee will be present on-site during all intrusive work, e.g., drilling operations, excavations, trenching, and will provide monitoring to oversee that appropriate levels of protection and safety procedures are utilized by C&S Engineers, Inc., personnel.

The use of salamanders or other equipment with an open flame is prohibited and the use of protective clothing especially hard hats and boots, will be required during drilling or other heavy equipment operations. All contaminated equipment, e.g., augers, split spoons, drill pipe, backhoe, bucket, etc., will be placed on liner material when not in use, or when awaiting and during steam cleaning.

Communications will be maintained at all times.

10.2.2 Excavation Trenching

Guidance relating to safe work practices for C&S Engineers, Inc., employees regarding excavating/trenching operation is presented in Appendix E of this HASP.

SECTION 11 — DECONTAMINATION PROCEDURES

Decontamination involves physically removing contaminants and/or converting them chemically into innocuous substances. Only general guidance can be given on methods and techniques for decontamination. Decontamination methods will include:

- Removal and disposal of protective equipment
- Removal and thorough cleaning of protective equipment with detergent and water
- Thorough cleansing of the face and hands with soap and warm water

Decontamination procedures are designed to:

- Remove contaminants.
- Avoid spreading the contamination from the work zone.
- Avoid exposing unprotected personnel outside of the work zone to contaminants.

Contamination avoidance is the first and best method for preventing spread of contamination from a hazardous site. Each person involved in site operations must practice the basic methods of contamination avoidance listed below. Additional precautions may be required in the HASP.

- Know the limitations of all protective equipment being used.
- Do not enter a contaminated area unless it is necessary to carry out a specific objective.
- When in a contaminated area, avoid touching anything unnecessarily.

- Walk around pools of liquids, discolored areas, or any area that shows evidence of possible contamination.
- Walk upwind of contamination, if possible.
- Do not sit or lean against anything in a contaminated area. If you must kneel (e.g., to take samples), use a plastic ground sheet.
- If at all possible, do not set sampling equipment directly on contaminated areas. Place equipment on a protective cover such as a ground cloth.
- Use the proper tools necessary to safely conduct the work.

Specific methods that may reduce the chance of contamination are:

- Use of remote sampling techniques.
- Opening containers by non-manual means.
- Bagging monitoring instruments.
- Use of drum grapplers.
- Watering down dusty areas.

Equipment which will need to be decontaminated includes tools, monitoring equipment, and personal protective equipment. Items to be decontaminated will be brushed off, rinsed, and dropped into a plastic container supplied for that purpose. They will then be washed with a detergent solution and rinsed with clean water. Monitoring instruments will be wrapped in plastic bags prior to entering the field in order to reduce the potential for contamination. Instrumentation that is contaminated during field operations will be carefully wiped down.

Heavy equipment, if utilized for operations where it may be contaminated, will have prescribed decontamination procedures to prevent hazardous materials from potentially leaving the site. The onsite contractor will be responsible for decontaminating all construction equipment prior to demobilization.

SECTION 12 — DISPOSAL PROCEDURES

All discarded materials, waste materials, or other objects shall be handled in such a way as to reduce or eliminate the potential for spreading contamination, creating a sanitary hazard, or causing litter to be left on-site. All potentially contaminated materials, e.g., clothing, gloves, etc., will be bagged or drummed as necessary and segregated for proper disposal. All contaminated waste materials shall be disposed of as required by the provisions included in the contract and consistent with regulatory provisions.

All non-contaminated materials shall be collected and bagged for appropriate disposal.

SECTION 13 — EMERGENCY PLAN

As a result of the hazards at the site, and the conditions under which operations are conducted, there is the possibility of emergency situations. This section has established procedures for the implementation of an emergency plan.

13.1 Emergency Coordinator

The Site Emergency Coordinator is John Virginia, C&S Resident Project Representative.

The Site Emergency Coordinator shall implement the emergency plan whenever conditions at the site warrant such action. The Site Emergency Coordinator will be responsible for assuring the evacuation, emergency treatment, emergency transport of site personnel as necessary, and notification of emergency response units (refer to phone listing in the beginning of this HASP) and the appropriate management staff.

13.2 Evacuation

In the event of an emergency situation, such as fire, explosion, significant release of toxic gases, etc., all personnel will evacuate and assemble in a designated assembly area (most likely the project trailer). The Emergency Coordinator will have authority to contact outside services as required. Under no circumstances will incoming personnel or visitors be allowed to proceed into the area once the emergency signal has been given. The Emergency Coordinator must see that access for emergency equipment is provided and that all ignition sources have been shut down once the alarm has been sounded.

Once the safety of all personnel is established, the Fire Department and other emergency response groups will be notified by telephone of the emergency.

13.3 Potential or Actual Fire or Explosion

Immediately evacuate the site and notify local fire and police departments, and other appropriate emergency response groups, if LEL values are above 25% in the work zone or if an actual fire or explosion has taken place.

13.4 Environmental Incident (spread or release of contamination)

Control or stop the spread of contamination if possible. Notify the Emergency Coordinator and the Project Manager. Other appropriate response groups will be notified as appropriate.

13.5 Personnel Injury

Emergency first aid shall be applied on-site as necessary. Then, decontaminate (en route if necessary) and transport the individual to nearest medical facility if needed.

The ambulance/rescue squad shall be contacted for transport as necessary in an emergency. The directions to the hospital and a map are found in Figure 1.

13.6 Personnel Exposure

Skin Contact:	Use copious amounts of soap and water. Wash/rinse affected area thoroughly, then provide appropriate medical attention. Eyes should be thoroughly rinsed with water for at least 15 minutes.
Inhalation:	Move to fresh air and/or, if necessary, decontaminate and transport to emergency medical facility.
$(1-\delta_{1})^{2} = (1-\delta_{1})^{2} = (1-\delta_{1})^{2$	and the second secon
Ingestion:	Contact the Poison Control Center, decontaminate and transport to emergency medical facility.
Puncture Wound/	
Laceration:	Decontaminate, if possible, and transport to emergency medical facility. HSO will provide medical data sheets to medical personnel as requested.

13.7 Adverse Weather Conditions

In the event of adverse weather conditions, the HSO will determine if work can continue without sacrificing the health and safety of C&S field workers.

13.8 Incident Investigation and Reporting


In the event of an incident, procedures discussed in the C&S incident investigation and reporting policy, which is presented in Appendix F of this HASP, shall be followed.


SECTION 14 -- COMMUNITY RELATIONS

Community relations may be a sensitive matter. All C&S employees should be aware of issues associated with this specific site. Conversations with community members not involved in activities at the site should be limited. Conversations between site workers off the site, in restaurants, etc., should not include discussions of the potential hazards on the site nor should negative statements be made regarding the site.

SECTION 15 — AUTHORIZATIONS

C&S personnel authorized to enter the Site while operations are being conducted must be approved by the HSO. Authorization will involve completion of appropriate training courses, medical examination requirements, and review of this HASP. No C&S personnel should enter the work zone alone. Each C&S employee should check in with the HSO or Project Manager prior to entering the work zones.

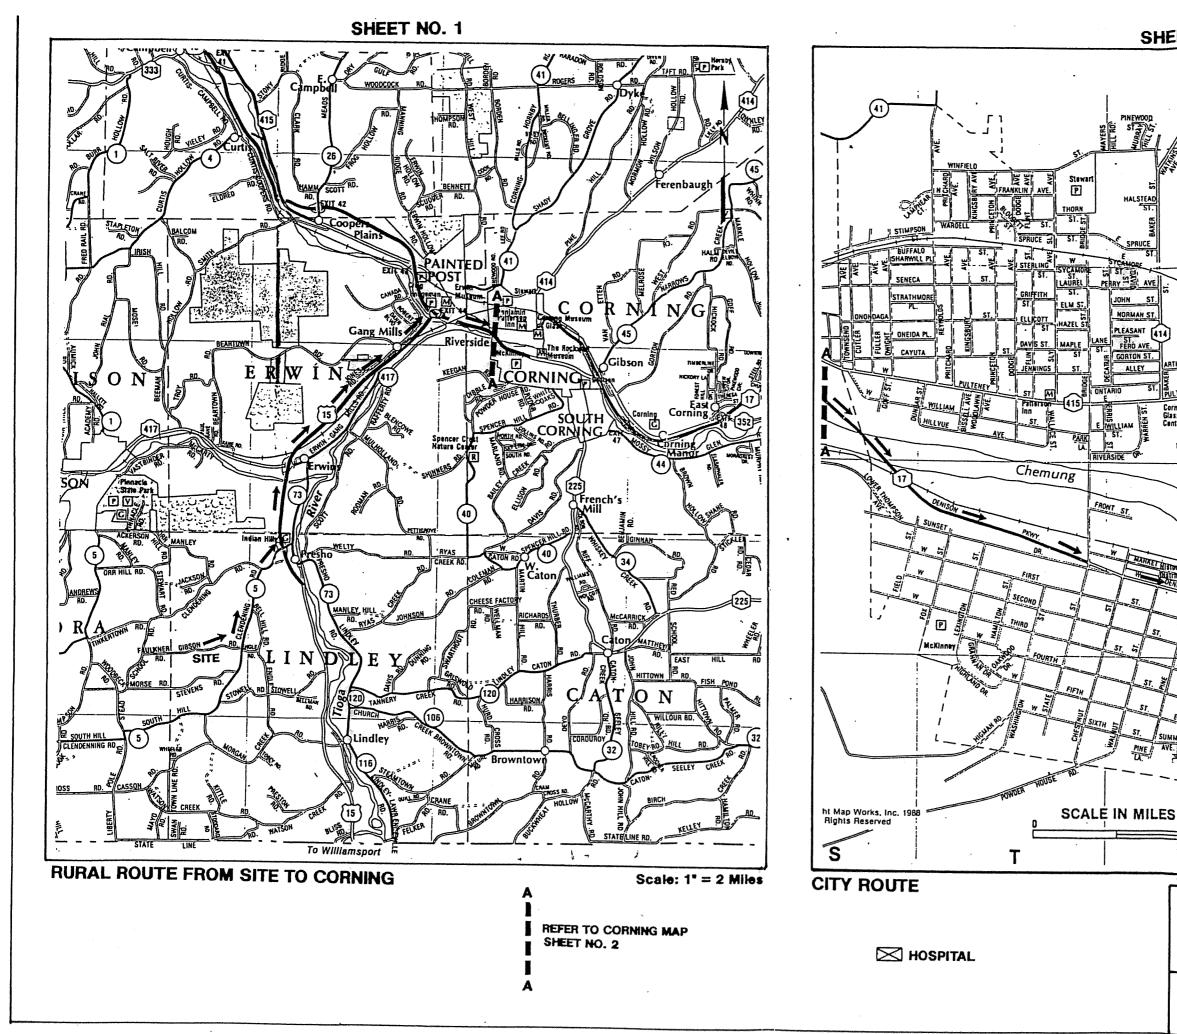

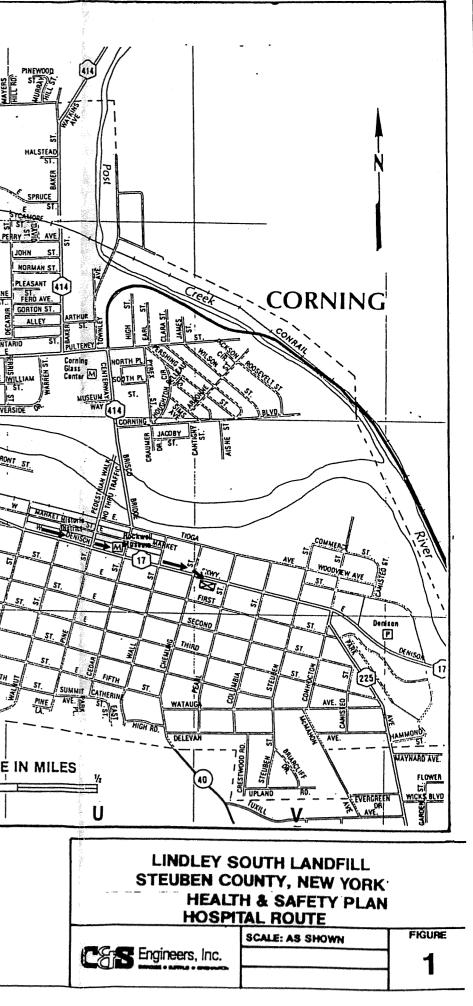

APPENDIX A

M

Í

Í

ANALYTICAL DATA

Town of Lindley - Steuben County

.

Phase II Investigations - Filtered Metals

		Class GA	Class GA	•	Grou	ndwater Sa	mples		Leachate	Surfa	ce Water Sa	mples
Parameters	Units	Standard	Guidance	GW-1	GW-2	GW-3	GW-4	GW-5	L-4	SW-5	SW-6	SW-7
Aluminum	ug/l	100		156	100	100	100	100	6090	1180	515000	1640
Antimony	ug/l		3	60	60	60	60	60	60	60	60	60
Arsenic	ug/l	25		5	5	5	5	12.7	16	5.	78.1	10.6
Barium	ug/l	1000		52	82	115	25	254	1080	51.1	8110	863
Beryllium	ug/l		3	2	2	2	2	2	2	2	28	2
Cadmium	ug/l	10		5	5	5	5	5	111	5	2111	5.4
Calcium	ug/i			86400	59200	75200	245000	234000	1620000	84500	610000	354000
Chromium	ug/i	50		10	· 10	10	10	10	82	10	635	13
Cobalt	ug/l	5		10	10	10	10	10	70.2	10	535	13
Copper	ug/l	200		10	10	10	10	10	10	16.6	1150	10
Iron	ug/l	300		614	227	86	43	8750	895000	2180	1610000	72200
Lead	ug/l	25		5	5	5	5	5	13.8	5	5130	10.3
Magnesium	ug/l		35000	32300	54700	37300	68400	62500	337000	13100	255000	84100
Manganese	ug/l	300		1100	620	693	2410	25400	66700	62.7	44900	30200
Mercury	ug/l	2		0.2	0.2	0.2	0.2	0.2	0.2	0.2	1.3	0.2
Nickel	ug/l			15	15	15	15	15	215	15	1080	19
Potassium	ug/l			3960	2970	18500	3620	1290	350000	1720	56300	39300
Selenium	ug/l	10		5	5	5	5	50	5	5	50	5
Silver	ug/l	50		10	10	10	10	10	10	10 - 20	10 😒	10
Sodium	ug/l	20000		29700	17000	31900	78400	30600	1060000	5420	56300	152000
Thallium	ug/l			5	5	5	5	5	5	5	5	5
Vanadium	ug/l			10	10	10.6	10	10	310	10	789	20
Zinc	ug/l	300		11	20	15.6	25	19	1970	18.7	28900	236

٠

.

Town of Lindley Landfill - Steuben County

Phase II Investigations - Volatile Organic Data

	Class GA	Class GA		Groundw	ater Monitor	ing Wells		Leachate	Leachate Surface Water Samples				
Parameter	Standard	Guidance	GW-1	GW-2	GW-3	GW-4	<u>GW-5</u>	L-4	<u>SW-5</u>		SW-7	SW-8	
units			ug/i	l\gu	ug/i	ug/l	ug/i	ug/l	ug/l	ug/l	ug/i	ug/l	
Methylene Chloride	5		4	5	8	6	20	1800	5	18	280	7	
Acetone			12	32	16	33	120	9600	8	150	1000	94	
1,1-Dichloroethene	5						~~	2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 -		10	ini Çeti		
1,1-Dichloroethane	5						11						
Carbon Disulfide										5		96	
Total 1,2-Dichloroethene						i.							
2-Butanone				48			340	23000		250	2600	130	
1,2-Dichloroethane	5			· ·	10			1.11	a di seconda				
1,1,1-Trichloroethane	5								1. S.		1. N. 1.		
Carbon Tetrachloride	5												
Trichloroethene	5					1				ê.			
Benzene	0.7									2 S F			
2-Methyl-2-Pentanone	5								ļ				
Tetrachloroethene	5												
Toluene	5						8	450	ай. С	9		17	
Chlorobenzene	5		1941 - 1					e de la companya de				s di	
Total Xylenes	5					{				14			
Ethylbenzene	5											2 ·	
Phenol	1					1	3	460		2	15	8 2	
2-Methylphenol							2	54		a.			
4-Methyiphenol								5400		31	600		
Benzoic Acid					1		36		x.	12	650		
Diethylphthalate		50	Į				2	320		2	16		
4,4-DDE			а. С		0.06	1							
4,4-DDD	1				0.02								
4,4-DDT					0.1	1						F	
Arocior 1248				3.4									
Bis(2-ethylhexyl)phthalate	50		11	6	13	the same of the	14		9	12	6	680	

•

Town of Lindley South Landfill Phase II Investigations - Volatile Organic Data

É,

..

	Air	Monitoring Samp	les
Parameter	Vent-7	Vent-8	GW-3
Units	ug/Cu. M.	ug/Cu. M.	ug/Cu. M.
Methylene Chloride	4500	4200	3.3
Acetone	870	560	.36
1,1-Dichloroethene	9.6		
1,1-Dichloroethane	830	770	
Carbon Disulfide			
Total 1,2-Dichloroethene	79	62	
2-Butanone	1100	1800	6.6
1,2-Dichloroethane	22	19	•
1,1,1-Trichloroethane	200	89	1.1
Carbon Tetrachloride			0.5
Trichloroethene	1100	840	
Benzene	59	51	1.5
2-Methyl-2-Pentanone		98	
Tetrachloroethene	850	690	
Toluene	1100	1520	2.2
Chlorobenzene		27	
Total Xylenes	570	940	2.3
Ethylbenzene	. 110	170	4.3

Parameters	Units	GA Standard	L-1 .	L-1	L-2	L-2	L-3	L-3
	Date	Sampled	01/23/95	04/18/95	01/23/95	04/18/95	01/23/95	04/18/95
NO3/NO2	mg/l	10	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Alk.	mg/l		1300	1800	930	520	990	810
Chloride	mg/l	250	160	240	100 👌	610	150	220
COD	mg/1		1500	1900	680	[.] 700	940	1000
NH3	mg/l	2.0	33	44	31	74	0.6	<0.5
Sulfate	mg/l	250	12	10	14	<10	6	39
TDS	mg/l	500	2200	4000	1200	2200	2800	4200
TOC	mg/l		250	560	220	460	460	640
Phenol	mg/l	0,001	0.56	0,18	< 0.005	0.24	0.34	< 0.05
Cadmium	mg/l	0.01	< 0.005	< 0.005	< 0.005	0.008	< 0.005	< 0.00
Calcium	mg/l		150	190	150	230	110	120
Iron	mg/l	0.3	31	38	62	93	1.9	1.5
Lead	mg/l	0,025	0.008	0.014	0.019	0.011	0.017	0.018
Mg	mg/l	35	58	83	39	66	45	59
Mn	mg/l	0.3	3.1	4,3	4.4	5.9	1.8	0.96
K	mg/l		46	75	24	64	12	17
Sodium	mg/l	20	170	380	63	160	200	320
Hardness	mg/l		610	820	540	850	460	540

(de))); **(16**

Quarterly Leachate Analytical Data - Water Quality and Metal Parameters

Parameters	Units	GA Standard	SW-1	SW-1	SW-2	SW-2	SW-3	SW-3
Date		Sampled	01/23/95	04/17/95	01/23/95	04/17/95	01/23/95	04/17/95
NO3/NO2	mg/l	10	<0.2	<0.2	0.3	<0.2	<0.3	0.2
Alk.	mg/l		120	96	64	69	<100	130
Chloride	mg/l	250	6	8	22	24	23	35
COD	mg/l		<20	<20	<20	<20	110	140
NH3	mg/l	2	<0.5	<0.5	0.5	0.5	5.1	0.7
Sulfate	mg/l	250	<5	11	17	25	13	26
TDS	mg/l	500	130	150	110	160	240	340
тос	mg/l		3	5	3	8	23	43
Phenol	mg/l	0.001	<0.005	<0.005	<0.005	<0.005	<0.005	<0.005
Cadmium	mg/l	0.01	<0.005	<0.005	<0.005	<0.005	<0.005	<0.005
Calcium	mg/l		27	26	22	23	26	32
Iron	mg/l	0,3	0.56	0.45	0.87	0.87	4.9	2.2
Lead	mg/l	0.025	0.013	0.001	0.009	<0.001	0.011	0.002
Mg	mg/l	35	4.8	5	5	5.7	7	9.1
Mn	mg/i	0,3	0.04	0.05	0.04	0.03	0.11	0.15
κ	mg/l		1.5	1.1	1.5	1.3	3.2	2.2

6.7

87

7.5

86

9.3

76

13

81

20

Sodium

Hardness

mg/l

mg/l

25

120

.

15

94

Quarterly Surface Water Analytical Data

APPENDIX B

.

Ń

Ń

Ń

<u>Î</u>

f

in the second

ſ

MATERIAL SAFETY DATA SHEETS (MSDS)

													Louis and the second			
RE	EQUERTE	R: BURKI	IART, MIKI	E	ACC02610	DATA CUC	•	20/98 F	PAGE 1							:)
02	Benzer 2610	12								илин <u>19</u> 17 - Улас Колсон (1917) Э						_1
		AAAA SEC	TION 1 -	CHEKICAL	PRODUCT	AND COMPA	NY IDENTI	FICATIO	IN ****							1
HE Ca	atalog S79	ne: Benzi Numbersi 1920ACS, 15500, B2	8243 4.	824 3-4, 8 11 1, 841	2434, 824 1 4, 8411	5 4, 8245 -1. 8411-	500, 824 4, 84111	45-4, B2 , 84114	245-300, B , 8414-1	2454						یں۔ اب
	y no symi Bet	51 189], ca;	al maphth	a, cycloh Fisher S 1 Reager	exatriene cientific	, pheny]									ŗ	ي.
Et Fi	nergen(or CHE)	y Number TREC as	sistance.	201-796-7 201-796-7 call: 80	100		?7-3887		•							ال.
4.		****	SECTION 2	- COMPOS	ITION, IN	FORMATION	I ON INGRI	EDIENTS	****							ار
j.	(CASA			hemical N			X	EINECS				ł			
+- +-		71-43-2			r bit wa tsi ing the age of the sit			>99¥	200-753	-7 +						-*
		Risk I	d Symbols Phrases:	11 45 48/	23/24/25									,		
			**** 5	ECTION 3	- HAZAROS	IDENTIFI	ICATION A	***								•
D	anopri	Fitzene	ly flamna	Flash Po	ERGENCY O Dinti 12 d Id. Harmfa Skin. Aspi Scis. Nay	eg F. 1 if inh:	led, May	ba ison! Ni	ן אין אין אין אין אין אין אין אין אין אין							-
1 C. a	rritat ause r boorna	ion, May eproduct litles, 1	cause re ive, and f Harmful d	spiratory etal effe r fatal i	/ and dige ects, Canc if swallow	stive tra er:hazarc med.	ict irrit: 3. Nay≈cal	ation, 7 ise blog	iay od		·	•				•
	arget" yslem.	urgans:	01000, C e	DCT21 NBI	veus syst	en, pone	marr q w,	inna ve								-
						9 ^{- 1}										
						•	• 2.									2
						•										

··· -

.

. .

#775 P.70/

13:00

1998,05-20

8608

490

412

FROM : FISHER SCIENTIFIC

-

÷

. .

Potential Health Effects Eye: Causes eye irritation. May cause slight transient injury. Skin: Causes skin irritation. May be absorbed through the skin in harmful anounts. Direct contact with the liquid may cause erythema and vesiculation. Prolonged or repeated contact has been associated with the development of a dry scaly dermatitis or with secondary infections. Ingestion: Aspiration hazard. Nay cause central nervous system depression, characterized by excitement, followed by headache, dizziness, drousiness, and nausea. Advanced stages may cause collapse, unconsciousness, come and possible death due to respiratory failure. Hay cause effects similar to those for inhalation exposure. Aspiration of material into the lungs may cause chemical pneumonitis, which may be fatal. Inhalation: May cause respiratory tract irritation. May cause adverse central nervous system effects including headache, convulsions, and possible death. May cause drousiness, unconsciousness, and central nervous system depression. Central nervous system affects may include confusion, ataxia, vertigo, tinnitus, weakness, disorientation, lethargy, drousiness, and finally coma. Exposure may lead to irreversible bone marrow injury. Exposure may lead to aplastic anenia. Chronics Possible cancer hazard based on tests with laboratory animals. Prolonged or repeated exposure may cause adverse reproductive effects. May cause bone marrow abnormalities with damage to blood forming tissues. Hay cause anenia and other blood cell abnormalities. Chronic exposure has been associated with an increased incidence of leukemia and multiple nyelomas. Immunodepressive effects have been reported. Animal studies have reported feistexicity (growth retardation) and teratogenicity (exencephaly, angulated ribs, dilated brain ventricles). **** SECTION 4 - FIRST AID MEASURES ****

Eyesi

Flush eyes with plenty of water for at least 15 minutes, accasionally lifting the upper and lower lids, Get medical aid

レゴト

Ľ

#775

13:00

20

1998, 05-

8608

innedictely,

Skin:

Get medical aid immediately, Immediately flush skin with plenty of scap and water for at least 15 minutes while removing contaminated clothing and shoes.

Ingestion:

Do NDT induce vomiting. If victim is conscious and alert, give 2-4 cupfuls of milk or water. Never give anything by mouth to an uncanscious person. Possible aspiration hazard, Get medical aid immediately.

Inhalation;

Bet medical aid immediately. Remove from exposure to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen.

Notes to Physiciani

Treat symptomatically and supportively.

**** SECTION 5 - FIRE FIGHTING HEASURES ****

Beneral Information:

Containers can build up pressure if exposed to heat and/or fire. As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIDSH (approved or equivalent), and full protective gear. Water runoff can cause environmental damage. Dike and collect water used to fight fire. Vapors can travel to a seurce of ignition and flash back. Extremely flammable. Material will readily ignite at room temperature. Use water spray to keep fire-exposed containers cool. Containers may explode in the heat of a fire. Vapors may be heavier than air. They can spread along the ground and collect in low or confined areas. Vapors may form an explosive mixtore with air.

Extinguishing Media

Use water spray to cool fire-exposed containers. Water may be ineffective. On NOT use straight streams of water. For large fires, use water spray, fog or regular foam. For small fires, use dry chemical, carbon dioxide, water spray or regular foam. Cool containers with flooding quantities of water until well after fire in out.

Autoignition Temperature: 1044 deg F (562,22 deg C) Flash Point: 12 deg F (-11.11 deg C) NFPA Rating: health-2; flanmability-3; reactivity-0 Explosion Limits, Lower: 1.3X Upper: 7.1X

FROM

ທ

ţ

5

m

1998, 05-20

8608

490

412

5....

**** SECTION 6 - ACCIDENTAL RELEASE MEASURES ****

ACC02610

General Information: Use proper personal protective equipment as indicated in Section B.

Spills/Leaks:

Use water spray to dilute spill to a non-flammable mixture, Avoid runoff into storm severs and ditches which lead to waterways. Use water spray to disperse the gas/vapor, Remove all sources of ignition. Absort spill using an absorbent, non-combustible material such as earth, sand, or verbicalite. A vapor suppressing feam may be used to reduce vapors.

++++ SECTION 7 - HANDLING and STORAGE ++++

Handling:

Wash theraughly after handling. Remove contaminated clothing and wash before reuse. Ground and bond containers when transferring material. Do not get in eyes, on skin, or on clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Keep container tightly closed. Avoid contact with heat, sparks and flame. Do not ingest or inhale. Use only in a chemical fume hood. Go not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames.

Storage:

Reep away from heat, sparks, and flame. Keep away from sources of ignition. Store in a tightly closed container. Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances.

**** SECTION 8 - EXPUSURE CONTROLS, PERSONAL PROTECTION ****

Engineering Controls;

Use only under a chemical fune hoad,

Exposare Limits . OSHA - Final PELs ACGIH NIDSH Chenical Name 0.5 ppm / 1.6 mg/m3; 2.5 ppm STEL; 8 mg/m3 0.1 ppm TWA; 10 ppm TWA (apply Benzene NIOSH Potential only to exempt Occupational industry STEL Carcinogen - see segments); 1 p

8608

ň

۸

6

ň

00

1998,05-

REQUESTER: BURKHART, MIKE ACC02610 05/20/98 PAGE . 5

TELI 0.5 ppm TUA Appendix A 50 ppm IOLH (not considering action link carcinogenic Cancer haz t) ard) Flanuabl e (see 2 9 CFR 19 effects) 10.1028)

OSHA Vacated PELsi Benzenei

10 ppm TWA (upless specified in 1910,1028)

Personal Protective Equipment

Eyesi

Vear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133.

.

 \odot

្ចា

لر

Skint

Wear appropriate protective gloves to prevent skin. exposure.

Clething:

Wear appropriate protective clothing to prevent skin exposure.

Respirators:

Follow the DSHA respirator regulations found in 29CFR 1910.134. Always use a NIOSH-approved respirator when hecessary.

**** SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES ****

Physical State:	Liquid
Appearance	colourless
Ddor:	sweetish odor - arematic odor
pHi	Not available.
Vaper Pressure:	100 mm Hg
Vapor Density:	2.7 (Air=1)
Evaporation Rate:	2.7 (Air=1) 2.8 (Ether=1)
Visconity:	0.647mPa at 200
Boiling Peint	176 deg F
Freezing/Melting Points	42 deg F
Decemposition Temperatures	Not available.

Q.

ທ

₩ #

3:02

-

1998, ØS-20

490 8098

REQUESTER: BURKHART, MIKE

5 P.75,

80

M

1998, 05-20

8608

490

412

SCIENTIFIC

: FISHER

FROM

Sites Specific Gravity/Density: 0.88 Nolecular Formula: C6H6 Nolecular Veight: 78.0	1
unteraim, merditri 1016	76

**** SECTION 10 - STABILITY AND REACTIVITY ****

Chenical Stability:

Stable under normal temperatures and pressures. Conditions to Avoid:

Incompatible materials, ignition sources, excess heat. Incompatibilities with Other Materials:

Benzene is incompatible with arsenic pentafluoride + potassion methoxide, diborane, hydragen + raney nickel, interhalogens, oridants, pranium hexafluoride, bromine pentafluoride, chlorine, chlorine trifluoride, chronic anhydride, nitryl perchlorate, oxygen, ozone, perchlorates; perchloryl fluoride + aluminum chloride, permanganates + sulfuric acid, potassium peroxide and silver perchlorate, indine heptafluoride, and dioxygen difluoride. Hazardous Decomposition Products: Irritating and toxic fumes and gases.

Hazardous Polymerization: Has not been reported.

**** SECTION 11 - TOXICOLOGICAL INFORMATION ****

RTECS#:

CAS4 71-43-21 CY1400000

L050/LC501

CAS¢ 71-43-2: Inhelation, mease: LC50 =9980 ppm; Inhelation, rat: LC50 =10000 ppm/7H; Oral, nouse: LD50 = 4700 mg/kg; Oral, rat: L050 = 930 mg/kg; Skin, rabbit: L050 = >9400 mg/kg. Carcinogenicity:

Benzene -

ACGIH: Al-confirmed human carcinogeu

California: carcinogen - initial date 2/27/87

NJOSH: accupational carcinogen

- NTP: Known carcinogen
- OSHA: Select carcinogen
- IARC: Group 1 carcinogen

Epidemiology:

IARC has concluded that epidemiological studies have establi shed the relationship between benzene exposure and the dev elopment of acute myelogenous leukemia, and that there is

, i	REQUERTERI BURKHART, KIKE ACC02610 05/20/98 PAGE 7			i ang sa	 ر.
	eufficient suidance that benear is corrinogenic to human stadies have demonstrated fetoxicity (growth retardation) and teratogenicity (exencephaly, angulated ribs, dilated brain ventricles).				:
•	Teratogenicity: Experimental teratogen, Animal studies have demonstrated fetoxicity (growth retardation) and teratogenicity (exencephaly, angulated ribs, dilated brain ventricles).				-'
	Reproductive Effects) Experimental reproductive effects have been reported. Neurotoxicity: No information available. Kutagenicity:				!
	Chremosomal aberrations have been noted in animal tests. Other Studies: Please refer to RTECS CY1400000 for additional data.				ار
	**** SECTION 12 - ECOLOGICAL INFORMATION **** Ecotoxicity:				-
	Hinnow (distilled water) lethal, 5 ppm/6H, Sunfish (tap water) TLH=20 gpm/24H, Striped bass TLm96=100-10 ppm. Environmental Fate: No information reported. Physical/Chemical: No information available. Other:		ł		
	None. +*** SECTION 13 - DISPOSAL CONSIDERATIONS ****				
	Dispose of in a manner consistent with federal, state, and local regulations. RCRA D-Series Maximum Concentration of Contaminants: CAS# 71-43-2: waste number DO18; regulatory level =				
	0.5 mg/L. RCRA D-Series Chronic Toxicity Reference Levels: CAS# 71-43-2: chronic toxicity reference level = 0.005 mg/L.				
•	RČRA F-Series: None listed. RCRA P-Series: None listed. RCRA U-Series: CAS‡ 71-43-2; waste number U019 (Ignitable waste: Toxic waste). CAS‡ 71-43-2 is banned from land disposal according				
	LASV /1-43-2 15 Danked trom 1900 Disposal according				
					-
					. *

•

. .. S. S. Da

412 490 8098

#775 P.76/79

13:03

1998,05-20

..

**** SECTION 14 - TRANSPORT INFORMATION ****

US DOT	
Shipping Name:	
Hazard Classi	3
UN Numberi	ÜN1114
Packing Group:	
INO	
No information	availahla.
IATA	
No information	available.
RID/ADR	
No information	auaitahta
Canadian TOG	eteriete)
	DEMTENE
Shipping Name:	SENLENE
Hazard Classi	3(7,2)
UN Number:	UN2114

Other Information: FLASHPOINT -11

**** SECTION 15 - REGULATORY INFORMATION ****

. . . .

. . .

· · .

US FEDERAL TSCA

....

CASt 71-43-2 is listed on the TSCA inventory.

Health & Safety Reporting List

Hone of the chemicals are in the Health & Safety Reporting List.

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule. Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

Home of the chemicals in this material have a SNUR under TSCA. SARA

Section 302 (RD)

final RQ = 10 pounds (4.54 kg); receives an adjustable RQ of 10 pounds Section 302 (TPQ)

Hone of the chemicals in this product have a TPQ,

SARA Codes CAS Ø 71-43-2: acute, chronic, flammable, Section 313

This material contains Benzene (CAS4 71-43-2, >99%), which is subject

975 Jan 34

n.

ហ

M

m

1998,05-20

1

)

			a an
	REQUESTER: SURKHART, MIKE ACCO2610 05/20/98 PAGE 9		<u> </u>
و	40 CFR Part 373.	and the second	
ě	Clean Air Acti		, I
۵.	CAS# 71-43-2 is listed as a hazardous air pollutant (HAP). This material does not contain any Class 1 Ozone depletors.		
ŝ	This material does not contain any Class 2 Ozone depletors,		
₩	Clean Water Act: CASE 71-43-2 is listed as a Hazardous Babstance under the CWA.		ار
	CAS# 71-43-2 is listed as a Priority Pollutant under the Clean Water Act.		
50	CAS# 71-43-2 is listed as a Toxic Pollutant under the Clean Nater)
13	Act. OSHA:		
	None of the chemicals in this product are considered highly hazardous by OSHA.		
S N	STATE		١.
1	Benzene can be found on the following state right to know lists: California, New Jersey, Florida, Pennsylvania, Hinnesota,		
а S	Hassachusetts. The following statement(s) is(are) made in order to comply with		_!
8661	the California Safe Orinking Water Act:		
	WARNING: This product contains Benzene, a chemical known to the state of California to cause cancer.		
	Californía Ho Significant Risk Level; CAS\$ 71-43-2; na significant risk level = 7 ug/day	. '	
	European/International Regulations European Labeling in Accordance with EC Directives		
	Hazard Symbols: T F		~
m	Risk Phrases: R 11 Highly flammable.		
8608	R 45. Nay cause cancer, R 48/23/24/25 "Toxic Ladanger" of serious damage to		**
S S	health by prolonged exposure through inhalation; contact with skin and if swallowed.		
4 0	Safety Phrasesi		
412	S 45 In case of accident of if you feel unvell, seek nedical advice inmediately (show the label where		
Ч	passible). S 53 Avuid exposure - obtain special instructions		
	before use.	-	
	WGK (Nater Danger/Protection) CAS\$ 71-43-2: 3		
	Canada		

.

1

•••

δ,

n

40

13:1

80

-38, <u>85</u>-

8608

4004

412

FROM : FISHER SCIENTIFIC

1

CASA 21-42-2 is listed on Cunsde & DSL/RUSE LIST.

This product has a UHMIS classification of 82, D2A.

ACC02610.

CAS# 71-43-2 is not listed on Canada's Ingredient Disclosure List. Exposure Limits

CAS4 71-43-2:. DEL-AUSTRALIA:TWA 5 ppm (16 mg/m3);Carcinggen. DEL-BEL GIUM:TWA 10 ppm (32 mg/m3);Carcinogen JAN9. DEL-CZECHOSLOVAKIA:TWA 10 mg/m3;STEL 20 mg/m3. DEL-DENMARK:TWA 5 ppm (16 ng/m3);Skin;Carcinagen? ?DEL-FINLAND:TWA 5 ppm (15 mg/m3);STEL 10 ppm (30 mg/m3);Skin;Carcinagen? OEL-FINLAND:TWA 5 ppm (15 mg/m3);Carcinogen. DEL-GERMANY;Skin;Carcinagen. DEL-HUNGARY:STEL 5 mg/m3;Gkin;Carcinogen. DEL-GERMANY;Skin;Carcinagen. DEL-HUNGARY:STEL 5 mg/m3;Gkin;Carcinogen. DEL-TNDIA:TWA 10 ppm (30 mg/ m3);Carcinogen. DEL-JAPAN:TWA 10 ppm (32 mg/m3);StEL 25 ppm (80 mg/m3); CAR. DEL-THE NETHERLANDS:TWA 10 ppm (30 mg/m3);Skin. DEL-THE PHILIPPI NES:TWA 25 ppm (80 mg/m3);Skin. DEL-PDLAND:TWA 30 mg/m3;Skin. DEL-RUSS IA:TWA 10 ppm (5 mg/m3);StEL 5 ppm (16 mg/m3);Skin;CAR. DEL-SWEDEN;TW A 1 ppm (3 mg/m3);STEL 5 ppm (16 mg/m3);Skin;CAR. DEL-SWEDEN;TW A 1 ppm (3 mg/m3);StEL 5 ppm (16 mg/m3);Skin;CAR. DEL-SWEDEN;TW A 1 ppm (3 mg/m3);StEL 5 ppm (16 mg/m3);Skin;CAR. DEL-SWEDEN;TW A 1 ppm (3 mg/m3);StEL 5 ppm (16 mg/m3);Skin;CAR. DEL-SWEDEN;TW A 1 ppm (3 mg/m3);StEL 5 ppm (16 mg/m3);Skin;CAR. DEL-SWEDEN;TW A 1 ppm (3 mg/m3);StEL 5 ppm (16 mg/m3);Skin;CAR. DEL-SWEDEN;TW A 1 ppm (3 mg/m3);Stel 5 ppm (16 mg/m3);Skin;CAR. DEL-SWEDEN;TW A 1 ppm (3 mg/m3);Stel 5 ppm (16 mg/m3);Skin;CAR. DEL-SWEDEN;TW A 1 ppm (3 mg/m3);Stel 5 ppm (16 mg/m3);Skin;CAR. DEL-SWEDEN;TW A 1 ppm (3 mg/m3);DEL-TURKEY;TWA 20 ppm (64 mg/m3);Skin. DEL-UNITE D KINGDOH:TWA 10 ppm (30 mg/m3). DEL IN BULGARIA, COLOMBIA, JGROAN, KO REA check ACGIH TLV. DEL IN NEW ZEALAND, SINGAPORE, VIETNAM check ACGI

**** SECTION 16 - ADDITIONAL INFORMATION ****

MSDS Creation Date: 1/05/1995 Revision #17 Date: 12/12/1997

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no way shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary; damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.

1010	lene	·				
23590				•		
	#### SECT	IDN 1 - CHENICAL PRODUCT AND COMPAN	Y IDENTIFICATI	ON ++++		
	lane: Toluen 1g Numbers:	e				
	80229, S802 197290RS-200 1289-4, T290 1290RS200, T	29-1, 580229-2, 580229HPLC, 6802295 , 8PT290RS-28, 8PT290RS-50, 8W16710 1, T290 4, T290-1, T290-4, T2901 290R528, T290R550, T2906K 1, T2905K 05K4, T2905S115, T2914, T291-4, T2	06, NC9475555, 12904, 1290J4, 4, 1290SK-1.	SB02292NF, T290R5115, T2905K-4.		
	12914LDT010, 1323 20, T32	0584, T29055115, T291 4, T291-4, T2 T291J4, T313 4, T313-4, T3134, T31 3_4, T323-20, T323-4, T32320, T3234	35K 4, T3135K- , T324 1, T324	4, T3135K4, 20, T324 200,		
	1324 4, 1324 132420, 1324 1324FB200, 1 1324FB200, 1 1324FB115, 1 13245K 4, 13 13245550, 13	500, T324-1, T324-20, T324-200, T3 20 001, T324200, T32420001, T3244, 324FB50, T324J4, T324RB115, T324RB1 324RS200, T324RS28, T324RS50, T324S 24SK-4, T324SK4, T324SK4LC, T324SS1 26S20, T330 4, T330-4, T3304	124-4, 1324-500 1324500, 1324F 9, 132488200,	, T3241, 8115, T324F819 T324R050.		
Synony J Compa	Nethacide, m	ethylbenzene, nethylbenzol, phenylm atiom: Fisher Scientific 1 Reagent Lane Fairlawn, NJ 07410	bethane, tøluol	•		
Energ Far Cl	nformation, ency Number: HEMTREC assi nternational	call: 201-796-7100	-3887			
	**** SE	CTION 2 - COMPOSITION, INFORMATION	DN INGREDIENTS	****		
1	CA5ŧ	Chemical Name	X	EINECS		
		Benzene, nethyl-	>99	203-625-9		

.

.

·

FROM : FISHER SCIENTIFIC

••

·)

1

EMERGENCY OVERVIEN

Appearance: colourless. Flash Point: 40 deg F. Danger! Flannable liquid. Hay cause skin irritation. Harnful if inhaled. This substance has caused adverse reproductive and fetal effects in animals. Hay cause central nervous system depression. Aspiration hazard. Hay be absorbed through the skin. Poison! Hay cause liver and kidbey damage. Causes digestive and respiratory tract irritation. Harnful or fatal if swallawed. Causes eye irritation and possible transient injury. Target Organs: Kidbeys, central agrous system, liver.

Potential Health Effects Eye:

Causes eye irritation. May result in corneal injury. Vapors may cause eye irritation.

Skin:

-

P.61,

#775 1

12:56

1998.05-20

8608

490

412

SCIENT IFIC

: FISHER

FROM

Hay cause skin irritation. Prelenged and/or repeated contact may

cause irritation and/or dermatitis. May be absorbed through the skin. Ingestion

Aspiration hazard. May cause irritation of the digestive tract. May cause effects similar to those for inhalation exposure. Aspiration of material into the luggs may cause chemical pheumonitis, which may be fatal.

Inhalation:

Inhalation of high concentrations may cause central nervous system effects characterized by headache, dizziness, unconsciousness and comp. Inhalation of vapor may cause respiratory (ract irritation. May cause liver and kidney damage. Vapors may cause dizziness or suffocation. Overerposure may cause dizziness, tremors, restlessness, rapid heart beat, increased blood pressure, hallucinations, acidosis, kidney failure,

Chronic:

Prolonged or repeated skip contact may cause dermatitis. May cause cardiac sensitization and severa heart abnormalities. May cause liver and kidney damage.

**** SECTION 4 - FIRST AID HEASURES ****

Eyesi

Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower lids. Get medical ald immediately. 32101 Flush skin with plenty of soap and water for at least 15 minutes while removing contaminated clothing and shoes. Get medical aid if irritation develops or persists.

Ingestion

Do NOT induce veniting. If victim is conscious and alert, give 2-4 cupfuls of milk or water. Never give anything by mouth to an uncenscious person. Possible aspiration hazard. Bet modical aid innediately.

Inhalation:

5

Ň

ģ

8608

8

SCIENTIFIC

: FISHER

Get medical aid immediately. Remove from exposure to fresh air immediately. If not breathing, give artificial respiration, If breathing is difficult, give oxygen. Notes to Physician:

Causes cardiac sensitization to endogenous catelchelamines which may lead to cardiac arrhythmias. Do NOT use adrenergic agents such as epinephrine or pseudoepinephrine.

AAAA SECTION 5 - FIRE FIGHTING MEASURES AAAA

General Information:

Containers can build up pressure if exposed to heat and/or fire. As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved ar equivalent), and full protective gear. Water runoff can cause environmental damage. Dike and collect water used to fight fire. Vapors may form an explosive mixture with air. Vapors can travel to a source of ignition and flash back. Flannable Liquid, Can release vapors that form explosive nixtores at temperatures above the flashpoint. Use water spray to keep fire-exposed containers cool. Water may be ineffective. Haterial is lighter than water and a fire may be spread by the use of water. Vapors may be heavier than air. They can spread along the ground and collect in low pr confined areas. Containers may explode when heated.

Extinguishing Media:

Use water spray to cool fire exposed containers, Nater may be ineffective, On NOT use straight streams of water. For small fires, use dry chemical, carbon dioxide, water spray or regular foam. Cool containers with flooding quantities of water until well after fire is out. For large fires, use water spray, fog or regular feam. Autoignitian Temperature: 896 deg F (480.00 deg C)

Flash Point: 40 deg F (4.44 deg C) NFPA Rating: health-2; flammability-3; reactivity-0

Leader birthe Upper: 7.1

**** SECTION 6 - ACCIDENTAL RELEASE HEASURES ****

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks:

Avoid runoff into storp severs and ditches which lead to waterways. Remove all sources of ignition. Absorb spill using an absorbent, non-combustible material such as earth, sand, or vermiculite. A vapor suppressing foam may be used to reduce vapors. Water spray may reduce vaper but may not prevent ignition in closed spaces.

**** SECTION 7 - HANOLING and STORAGE ****

Handling:

Wash thoroughly after handling, Use with adequate ventilation. Ground and bond containers when transferring material. Avoid contact with eyes, skin, and clothing. Empty containers retain product vith eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Keep container tightly closed. Avoid costact with heat, sparks and flame. Avoid ingestion and inhalation. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or apen flames.

Storage:

Keep away from heat, sparks, and flame. Keep away from sources of ignition. Store in a tightly closed container. Store in a cool, dry, well-ventilated area away from incompatible substances.

**** SECTION 8 - EXPOSURE CONTROLS, PERSONAL PROTECTION ****

Engineering Controls:

Use adequate general or local enhaust ventilation to keep airborne concentrations below the permissible exposure limits.

Exposure Limits

Chemical Name	ACGIH	NIOSK	IOSHA - Final PELS
Benzene, pethy]-	50 ppm 188 mg/m3	100 ppm TWA; 375 ng/m3 TWA 500 ppm IDLH	200 ppn TWA; C 300 ppn; C 300 ppm

a #775 6 Ň

1998, 05-20

63/79

FROM

 \cdot

*****	KE ACC23590 05/20/98 PAGF 5	· •		
4				
OSHA Vacated PELs: 8enzene, neth 100 ppm TWA;	yl-1 ,			
Personal Protectiv	e Equipment			
Eyes:				
	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133.			
Clothing	Uear appropriate protective gloves to prevent skin exposure,			
	Wear appropriate protective clothing to prevent skin exposure.			
	Follow the OSHA respirator regulations found in 29CFR 1910.134. Always use a NIOSH-approved respirator when necessary.			
**** SECTI	ON 9 - PHYSICAL AND CHEMICAL PROPERTIES ****		, .	
Physical State: Appearance: Odor: pH: Usean Processor	Liquid colourless sweetish odor - pleasant odor Not available.			
Vapør Pressure: Vapor Densily: Evaporation Rate: Viscosity: Diitan Diita.	10 mm Hg 3.1 (Air=1) 2.4 (Butyl acetate=1) 0.59 cP at 68F.			
Boiling Point: Freeing/Melting Point: Decomposition Temperatu Solubility: Specific Gravity/Densit Molecular Formula:	re: Not available. 20.6 mg/L H2O at 68F.		•	

**** SECTION 10 - STABILITY AND REACTIVITY ****

.

8 4 a. #775 !

12:58

1998, ØS-20

450 8098

412

SCIENTIFIC

: FISHER

FROM . •*

	· · · ·	د. مستخلفها مراجع بالاقتصارية مطرح المعرب الأراب المعرب المعرف المراجع المعرف المعرف المعرف المعرف مع المعرف مع ال المعرف المعرف
•	REQUENTER: BURKHART, HIKE ACC23590 05/20/98 PAPE 6	ر.
	Chemical Stability: Stable under normal temperatures and pressures,	
	Conditions to Avoid: Incompatible materials, ignition sources, excess heat.	
	Incompatibilities with Other Materials:	
• •	Ntrogeo tetroxide, nitric acid + sulfuric acid, silver perchlorato, streng oxidizers, sodium dilfuoride, .	
	Hazardous Decomposition Products: Carbon monoxide, carbon dioxide.	
	Hazardous Polymerization: Has not been reported.	ر
	**** SECTION 11 - TOXICOLOGICAL INFORMATION ****	
	RTECS#: CAS4 108-88-3: XS5250000	i
	L050/LC50: CA50 108-88-3: Inhalation, monse: LC50 =400 ppm/24H; Inhalation,	
	rat: LC50 =49 gm/m3/4H; Oral, rat: L050 = 636 mg/kg; Skin, rabbit:	
	L050 = 12124 mg/kg. Carcinogenicity:	·
	Benzene, methyl ACGIH: A4 - Not Classifiable as a Human Carcinegen	•
	IARC: Graup 3 carcinogen Epidemiology:	
	No information available. Teratogenicity:	
	Specific developmental abnormalities included cranidfacial effects involving the nose and tongue, musculoskeletal effects, urogenital	
	and metabolic effects in studies on mice and rats by the inhalation and oral routes of exposure. Some evidence of fetotoxicity with	
	reduced fetal weight and retarded skeletal development has been reported in nice and rats.	
	Reproductive Effects: Effects on fertility such as abortion were reported in rabbits by	
	inhalation. Paternal effects were noted in rats by inhalation. These	
	effects involved the testes, spern dact and epididymis. Neurotoxicity:	
	No information available. Nutagenicity:	
•	No information available. Other Studies:	
	Nane.	
		-
	₽ 4	•··

FROM : FISHER SCIENTIFIC

••

all the second		nationappen i Madaga en et	, manipul angunanga di Karan	Abalada -
<u>ل</u>	REQUESTER: BURKHART, MIKE ACC23590 05/20/98 PAGE 7)
-	Ecotomicity: Bluegill LC50=17 mg/L/24H Shrimp LC50=4.3 ppm/96H Fathead minnow LC50=36.2 mg/L/96H Sunfish (fresh water) TLm=1180 mg/L/96H Environmental Fate: From soil, substance evaporates and is microbially biodegraded. In water, substance volatilizes and biodegrades. Physical/Chemical: Physical/Chemically produced hydroxyl radicals degrade substance. Other: Nome.		•	
	**** SECTION 13 - DISPOSAL CONSIDERATIONS ****			
-	Dispose of in a manner consistent with federal, state, and local regulations. RCRA D-Series Maximum Concentration of Contaminants: None listed. RCRA D-Series Chronic Toxicity Reference Levels: None Listed. RCRA F-Series: None listed. RCRA P-Series: None listed. RCRA U-Series: CAS# 108-88-3: Waste number U220. CAS# 108-88-3 is banned from land disposal according		•	

**** SECTION 14 - TRANSPORT INFORMATION ****

.1

ار

ر_ا

J

412 490 8098

te RCRA.

IND

LATA

US DOT Shipping Name: TOLUEHE Hazard Class: 3 UN Number: UN1294 Packing Group: II

No information available, No information available, Casadian TOG Shipping Name: TOLUENE Hazard Class: 3(9.2) UN Number: UN1294

No information available.

No information available.

ģ D. #775

12:58

1998,05-20

<u>_</u>1

J

.7

1

		· .	L	
	Uther Information: FEASHPUINT 4 L		۰, و بي	
	**** SECTION 15 - REGULATORY INFORMATION ****	· · · · · · · · · · · · · · · · · · ·		
US F	EDERAL	,		
	TSCA CAS# 10B-88-3 is listed on the TSCA inventory.			
	Health & Safety Reporting List CAS\$ 108-88-3: Effective Date: October 4, 1982; Sooset Date: Chemical Test Rules	October 4		
	None of the chemicals in this product are under a Chemical Te Section 12b	est Rule,		
	None of the chemicals are listed under TBCA Section 12b. TSCA Significant New Use Rule			
	None of the chemicals in this material have a SNUR under TSCA SARA	.		
	Section 302 (RQ) final RQ = 1000 pounds (454 kg)			
	Section 302 (TPQ) None of the chemicals in this product have a TPQ.	• .		
	SARA Codes CAS 4 108-88-3; acute; flammable.	•		
	Section 313 This material contains Benzene, methyl- (CAS4 108-88-3, >99%)) which		
	is subject to the reporting requirements of Section 313 of SA III and 40 CFR Part 373.	RA TILIE	· · ·	
	Clean Air Act: CAS\$ 108-BB-3 is listed as a hazardous air pollutant (HAP).			
	This material does not contain any Class 1 Dzone depletors. This material does not contain any Class 2 Dzone depletors.			
	Clean Water Act:	14		
	CASM 10B-88-3 is listed as a Hazardows Substance under the CW CASM 10B-88-3 is listed as a Priority Pollutant under the Cle Act.			
	CAS# 10B-BU-3 is listed as a Toxic Pollutant under the Clean Act.	Water		
	OSHAI			
	None of the chemicals in this product are considered highly h by OSHA.	1azaroou 5		
STAT	IE Benzene, methyl- can be found on the fullowing state right to know			
·	lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.			

#775 P.67/79 1 '

12:59

1998, Ø5-20 :

412 490 8098

check ACGI TLV

Wenderico, fils product contains Benzeme, methyl-, a chemical known co the state of California to cause birth defects or other reproductive harn. Califernia No Significant Risk Level; None of the chemicals in this product are listed, European/International Regulations European Labeling in Accordance with EC Directives Hazard Symbols: XN F Risk Phrases: R 11 Highly flammable. R 20 Harmfol by inhalation, Safety Phrasesi S 16 Keep away from sources of ignition - No snoking. S 25 Avoid contact with eyes. S 29 Do not empty into drains. S 33 Take precautionary measures against static discharges. WGK (Water Danger/Protection) CAS# 108-88-3: 2 Canada CAS# 108-88-3 is listed on Canada's DSL/NDSL List. This product has a WHMIS classification of 82, 028. CAS# 108-88-3 is not listed on Canada's Ingredient Disclosure List. Exposure Limits CAS# 109-88-3; OEL-AUSTRALIA;TWA 100 ppm (375 mg/m3);STEL 150 ppm (5 60 mg/m3), DEL-BELGIUMITWA 100 ppm (377 mg/m3);STEL 150 ppm (565 mg/m3), 0 DEL-CZECHOSLOVAKIA:TWA 200 mg/m3;STEL 1000 mg/m3, DEL-DENMARK;TWA 5 0 ppm (190 mg/m3);Skin. DEL-FINLAND:TWA 100 ppm (375 mg/m3);STEL 150 pp m;Skin, DEL-FRANCE:TWA 100 ppm (375 mg/m3);STEL 150 ppm (560 mg/m3). DEL-GERMANY:TWA 100 ppm (380 mg/m3), DEL-HUNGARY:TWA 100 mg/m3;STEL 30 0 mg/m3;Skin. DEL-JAPAN;TWA 100 ppm (380 mg/m3). DEL-THE NETHERLANDS;T WA 100 ppm (375 mg/m3);Skin. DEL-THE PHILIPPINES:TWA 100 ppm (375 mg/m 3), DEL-POLAND;TWA 100 mg/m3, DEL-THE PHILIPPINES:TWA 100 ppm (375 mg/m 3), DEL-POLAND;TWA 100 mg/m3, DEL-TWE SIA;TWA 100 ppm;STEL 50 mg/m3 L-SWEDEN:TWA 50 ppm (200 mg/m3);STEL 100 ppm (400 mg/m3);Skin. DEL-SWI TZERLAND;TWA 100 ppm (380 mg/m3);STEL 500 ppm, DEL-THAILAND;TWA 200 pp m;STEL 300 ppm. DEL-TURKEY;TWA 200 ppm (750 mg/m3). DEL-UNITED KINGDOM ;TWA 100 ppm (375 mg/m3);STEL 150 ppm;Skin. DEL-SWI TWA 100 ppm (375 mg/m3);STEL 150 ppm;Skin. DEL-TWAILAND;TWA 200 pp m;STEL 300 ppm. 0EL-TURKEY;TWA 200 ppm (750 mg/m3). DEL-UNITED KINGDOM ;TWA 100 ppm (375 mg/m3);STEL 150 ppm;Skin. DEL-WITED KINGDAN; TWA 100 ppm (375 mg/m3);STEL 150 ppm;Skin. DEL-UNITED KINGDAN; CAS# 109-88-31, OEL-AUSTRALIA; TNA 100 ppm (375 mg/m3); STEL 150 ppm (5

++++ SECTION 16 - ADDITIONAL INFORMATION ++++

JORDAN, KOREA CHECK ACGIH TLV. DEL IN NEW ZEALAND, SINGAPORE, VIETNAH

FROM

ġ

۵.

#775

ព្រ Ň

202

1998, 05-

8608

490

P.69/

#775

13:00

998, 05-20

8608

NOUS Greatien Date: 1704/1995 Revision #24 Date: 12/12/1997

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no way shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits ar any special, indirect, incidental, consequential or exemplary damages, housever arising, even if Fisher has been advised of the possibility of such damages. **HSDS Name: Oichloromethane** Catalog Numbers;

S Name: Dichloromethane log Numbers: S71971, S71971-1, S80084, S80084-1, S80084-2SPEC, S80084HPLC, S80084SPEC, 01424L0T013, 01424L0T014, 0142R550, 0143RS115, 0143R5200, 0143R528, 0143R550, BP1186 4, BP1186-4, BP11864, BP11864 001, BP11864501, BP1186K5115 BP1186RS200, 8P1186K528, BP1186K515, BP1186S9200, BP1186K5200, BP1186SS 30, BP1186S5 50, BP1186S515, BP1186S9200, BP1186S528, BP1186S530, BP1186RS50, BP1186K520, BP1186S515, BP1186S9200, BP1186S528, BP1186S530, BP1186S50, DP143RS-115, 6P0143RS-200, BP1143RS-28, BP0143RS-50, BW4250RT50, 0123-1, D142 4, D142-4, D1424, D1424LDT011, D1424L0T012, D1425S115, 01425S200, 01425S20, 01425S50, D143 1, 0143 4, D143-1, D143-4, D1435, D14354, D14354, D1434L0T002, D14355-11, D143554, D14355-20, D14355-20, D14355-30, 014355-50, D14355-30, D150550, D1505 1, D150 4, D150-4, D15054, D1504, D1504, D15055 10, U13555 50, D15055200, D150530, D1505550, D150 4, D1501, D1504, D1504, D15058 1, D15058 4, D150585-1, D150585-115, D1505520, D15055-200, D15055-30, D15055520, D15055200, D1505530, D1505550, D151 1, D151 4, D151-1, D151-4, D1511, D1514, D1514002, D1514003, D1514004, D1514L07052, D1514L07039, D1514L07036, D1514L07039, D1514L07039, D1514L07040, D1514L07052, D1514L07031, D1544L07036, D1514L07039, D1514L07039, D1514L07040, D1515115, D15155200, D1515520, D155250, D152-4, D154 4, D1544, D1544L07009, 01544L07031, D1544L07038, O1544L07039, D3514L07047, D1514L0709, D1514L07031, D1544L07038, D1514L07039, D3514L07047, D1515115, D375197, D377200, D37200, D37200, D37, 200 001, D37200, D1378500, D37785-115, D3785200, D377850, D37850, D37850, D3785115, D3785200, D378550, D3785115, D3785200, D378520, D378550, D37854 4, D37584 4, D37584, D3785115, D3785200, D378520, D37850, D37854, D3758520, D378550, D3785115, D3785200, D378520, D37850, D37854, D3758200, D378550, D3785115, D3785200, D378520, D378520, D37854, D3758520, D3785200, D378550, D3785115, D3785200, D378520, D378520, D37854, D3758520, D37854, D3758200, D3785115, D3785200, D3785200, D378550, D37854, D37585200,

Synenyms:

Hethylene chloride, methylene dichloride, freon30 Company Identification: Fisher Scientific 1 Reagent Lane

Fairlawn, NJ 07410

SCIENTIFIC

: FISHER

FROM ι.

23 12

> 20 ŝ

1998.

REQUESTER: BURKHART, MIKE ACC14930

For International CALL: 201-778-7100 Emergency Kumber: 201-796-7100 For CHENTREC assistance, call: 800-424-9300 For International CHEMIREC assistance, call: 703-527-3887

A*** SECTION 2 - COMPOSITION, INFORMATION ON INGREDIENTS ****

CASI	Chemical Name	. X	EINECSI
75-09-2	Kethanz, dichlero-	100	200-838-9

Hazard Symbols: XN

Risk Phrases: 40

+*** SECTION 3 - HAZARDS IDENTIFICATION ****

ENERGENCY OVERVIEW

Appearance: colourless. Caution! May cause respiratory tract irritation. May cause digestive tract irritation. May be harmful if swallowed. May cause central nervous system depression. May be absorbed through the skin. May cause fetal effects based upon animal studies; May cause reproductive effects based upon animal studies. May cause severe eye and skin irritation with possible burns. May cause cancer based on animal studies. May be harmful if inhaled. Target Organs: Blood, central nervous system.

Potential Health Effects

Eyei

Contact with eyes may cause severe irritation, and possible eye burns.

Skin:

May be absarbed through the skin. Causes irritation with burning pain, itching, and redness. Proloaged exposure may result in skin burns.

Ingestion

May cause irritation of the digestive tract. May cause central nervous system depression, characterized by excitement, followed by headache, dizziness, drousiness, and neusea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure.

Inhalation:

: FISHER

MONT

ព

#775

2:52

1998, 05-20

8608

490

Inhibition of high concentrations may cause central nervous system effects characterized by headache, dizziness, unconsciousness and coma. Causes respiratory tract irritation, May cause blood changes, Dverexposure may cause an increase in carbaxyhemoglobin levels in the blood.

Chronic:

Possible cancer hazard based on tests with laboratory animals. Prelonged or repeated skin contact may cause dermatitis. Hay cause fetal effects.

AA+A SECTION 4 - FIRST AID MEASURES +4+4

Eyesi

Innediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower lids. Get medical aid innediately.

Skini

Get modical aid. Inmediately flush skin with plenty of soap and water for at least 15 minutes while removing contaminated clothing and shoes.

Ingestion:

If victim is conscious and alert, give 2-4 cupfuls of milk or vater. Never give anything by mouth to an unconscious person. Bet medical aid immediately.

Inhalation

Get medical aid immediately. Remove from exposure to fresh sir immediately. If not breathing, give artificial respiration. If breathing is difficult, give axygen.

Notes to Physician:

Treat symptomatically and supportively.

A+A+ SECTION 5 - FIRE FIGHTING MEASURES ++++

General Informations

As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Vapors mixed with air in proper proportion will propagate a flame.

Extinguishing Nedia:

In case of fire, use water, dry chemical, chemical foam, or alcohol-resistant foam. Use water spray to cool fire-exposed certainers.

Autoignition Temperature: 1033 deg F (556.11 deg C)

SCIENTIFIC

: FISHER

FROM

8608

Ń

iõ.

'n

ß

Ň

1998,05-20

J

Buigh Painte Not appliesble.

NFPA Rating: health-2; flammability-1; reactivity-0 Explosion Limits, Lower: 15.1 @ 1030C Upper: 17.3 @ 1480C

**** SECTION 6 - ACCIDENTAL RELEASE MEASURES ****

ACC14930

General Information: Use proper personal pretective equipment as indicated in Section 8.

Spills/Leaks:

Absorb spill with inert material, (e.g., dry sand or earth), then place into a chemical waste container.

**** SECTION 7 - HANDLING and STORAGE ****

Handlingı

Wash thoroughly after handling. Use with adequate ventilation. Avoid contact with eyes, skin, and clothing. Keep container tightly closed. Avoid ingestion and inhalation.

Storage

Store in a tightly closed container, Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances.

**** SECTION B - EXPOSURE CONTROLS, PERSONAL PROTECTION ****

Engineering Controls

Use adequate general or local exhaust ventilation to keep airborne concentrations below the permissible exposure limits.

ACGIH NIDSH OSHA - Final PELS Chemical Name _____ 150 ppm ; 174 NIOSH Potential Methane, dichloro-25 ppm TVA: 125 ppm STEL (15 min ng/13 Decupational Carcinggen - see Appendix A 2300 TWA); 25 ppm TW A (8 hr.); 125 ppn STEL (15 min; ppm IDLH that 12.5 ppm Act considering); carcinogenic ion Level (see effects) 29 CFR 19 10.1051

Exposure Limits

12

1998, 05-20

J

OSHA Vacated PELs: Methane, dichloro-: 500 ppm TWA

Personal Protective Equipment

Eyes:

Wear appropriate protective eyeglasses or chemical safety goggles as described by USHA's eye and face protection regulations in 29 CFR 1910.133.

Skini

. Near appropriate protective gloves to prevent skin exposure.

Clothings

Vear appropriate protective clothing to prevent skin exposure,

Respirators

Follow the OSHA respirator regulations found in 29CFR 1910.134. Always use a NIOSH-approved respirator when Accessary.

**** SECTION 9 - PHYSICAL AND CHENICAL PROPERTIES ****

Physical State:	Liquid
Appearances	colourless
Odpr:	ethereal odor
pHI	Not available.
pHi Vapor Pressurei	350 mm Hg Q 20
Vapor Densily:	2.9 (Air=1)
Evaporation Rate:	Not available.
Viscasity:	Not available.
Boiling Point:	104 deg F
Freezing/Melting Paints	-142 deg F
Decomposition Temperatures	Not available,
Solubility:	Noderately soluble in water
Specific Gravity/Density:	1.33 (Water=1)
Molecular Formula:	CH2C12
	84.92
-	

**** SECTION 10 - STABILITY AND REACTIVITY ****

SCIENTIFIC

: FISHER

FROM

ហ

10

÷

12:53

20

1998,05-

REQUESTER: BURKHART, MIKE	ACC14930 05/20/98 PAGF 6)	J.
trenical Stability: Stable. Conditions to Avoid: Inconstible materi	ials, stroog oxidants.			
Inconpatibilities with Inconpatible with nitrogen tetrakide sadium-patassium a	other Materials) strang oxidizers. Can react dangerously with , liquid oxygen, potassium, sodium, lloys, lithiam, potassium hydroxide with urea, potassium t-butoxide, and finely powdered			-!
aluminum and magne materials and liqu Hazardaus Decomposition Hydrogen chloride,	sion. sccurred with with mixtures of this id ammonia or dimethylaminopropylamine.			.
	11 - TOXICOLOGICAL INFORMATION ****			
RTECS4: CAS# 75-09-2: PA80 L050/L0501	50000			
CAS# 75-09-21 Inha rat: LC50 =88 gm/m Carcinggnicity: Kethane, dichloro-	lation, muser LC50 =14400 ppm/7H; Inhalation. 3/30H; Oral, rat: LD50 = 1600 ny/kg. nimal Carcinogen	•		ļ
California: carcin NIOSH: occupa NTP: Suspec OSHA: Possib	ogen - initial date 4/1/88 tional carcinogen t carcinogen le Select carcinogen			1
Epideniology: Hø data available.	28 carcinogen			. '
Teratogenicity: No data available. Reproduclive Effects: No data available.		• .		· .
Neurotoricity; No data available. Kutagenicity;				
He data available. Dther Studies: Ne data available.		•		
				·
				•

FROM : FISHER SCIENTIFIC

٠. .

..

μ Γ

#775 P.55/

12:54

1998,05-20 !

	REQUESTER; BURKHART, KIXE ACC14930 05/20/98 PAGE 7		ز.
62/	**** SECTION 12 - ECOLODICAL INFORMATION ****		
0 0 0 0 0	Ecotoxicity: This chemical has a enderate potential to affect some aquatic , organisms, it is resistant to biodegradation, and has a low potential		1
i2.2.#	ta persist in the aquatic environment, 96-hr. EC50 (loss of equilibrium), Fathead minnow: 99mg/L; 96-hr. EC10: 66.3 mg/L, Bluegill sunfish: 96-hr. LC50=220 mg/L; Water flea: 24-hr. LC50=2270 mg/L; No observed effect level:1550 mg/L.		الي.
12:54	Environmental Fate: This material is not likely to bioconcentrate. Physical/Chemical: Not available.		ار
	Other: Not available.		1
25-20 ,	**** SECTION 13 - DISPOSAL CONSIDERATIONS ****		<u>ب</u>
1998, ØS-20	Oispose of in a manner consistent with federal, state, and local regulations. RCRA D-Series Maxinum Concentration of Contaminants: None listed.		_*
rl.	RCRA B-Series Chronic Toxicity Reference Levels: None		
	listed. RCRA F-Series: None listed. RCRA P-Series: None listed. RCRA U-Series: CAS‡ 75-09-2; waste number U080. CAS‡ 75-09-2 is banned from land disposal according	·	_/
	to RCRA.		
8608	A*** SECTION 14 - TRANSPORT INFORMATION ****		. '
490 8	US DOT Shipping Name: DICHLORDMETHANE Hazard Class: 6.1		
412 4	UN Number: UN1593 Packing Group: III IMD		-
•	No information available. IATA No information available.		
	RID/ADR No infernation available, Canadian TDB		- `
<i>.</i> .			
E IC	· 		-
E Lug			
SCIENTIFIC			

· ·

· · ·

Chine .

~

62	REQUESTER: BURKHART, NIKE ACC14930 05/20/98 PAPE 8		<u> </u>
Р.57	Hazard Class: 6.1 UN Number: UN1593		
4 S27#	**** SECTION 15 - REGULATORY INFORMATION ****		
L _	US FEDERAL TSCA		ار
12:54	CAS# 75-09-2 is listed on the TSCA inventory. Health & Safety Reporting List CAS# 73-09-2: Effective Date: October 4, 1982; Sunset Date: October 4, Chemical Test Rules		ر
-	None of the chemicals in this product are under a Chemical Test Rule. Section 12b		
82 - 20 - 20	None of the chemicals are listed under TSCA Section 12b. TSCA Significant New Use Rule None of the chemicals in this material have a SNUR under TSCA. SARA	· · ·	1
1998,05-20	Section 302 (RQ) final RQ==_1000_pounds (454 kg) Section 302 (TPQ)		_ *
~	None of the chemicals in this product have a TPQ. SARA Codes CAS # 75-09-2: acute, chramic. Section 313	•	•
	This naterial contains Methane, dichloro- (CAS4 75-09-2, 100%),which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.		
8608 86	Clean Air Act: CASO 75-07-2 is listed as a hazardous air pollutant (HAP). This material does not contain any Class 1 Ozone depletors. This material does not contain any Class 2 Ozone depletors.	· · ·	
N 490	Clean Water Act: None of the chemicals in this product are listed as Hazardbus Substances under the CWA. CAS# 75-09-2 is listed as a Priority Pollotant onder the Clean Water		
412	Act. None of the chemicals in this product are listed as Toxic Pellutants under the CVA.		
•	OSHAT None of the chemicals in this product are considered highly hazardous by OSHA.	·	•
	STATE		
TIFIC			
SCIEN			
FISHER SCIENTIF			
FROM			

lists/ California, New Jersey, Florida, Pennsylvania, Minnesota, Hassachusetts. The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act: UARNING: This product centains Methane, dichloro-, a chemical known to the state of California to cause cancer. California Ng Significant Risk Level: CAS4 75-09-21 no significant risk level = 50 ug/day European/International Regulations European Labeling in Accordance with EC Directives Hazard Symbols: XN Risk Phrasesi R 40 Possible risks of irreversible effects. Safety Phrases: S 24/25 Avoid contact with skin and eyes. S 36/37 Wear suitable protective clothing and glaves. S 23C Do not breathe vapour, WGR (Water Danger/Protection) CAS# 75-09-2: 2 Canada CAS# 75-09-2 is listed on Canada's DSL/NDSL List. This product has a WHMIS classification of D18, D2A. CAS# 75-09-2 is not listed on Canada's Ingredient Disclosure List. Exposure Limits re Limits CAS# 75-09-2;. DEL-AUSTRALIA:TWA 100 ppm (350 mg/m3);Carcinogen. DEL-AUSTRIA:TWA 100 ppm (360 ng/m3). DEL-BELGIUM:TWA 50 ppm (174 mg/m3);Ca rcinogen. DEL-CZECHOSLOVAKIA:TWA 500 mg/m3;STEL 2500 ng/m3. DEL-DENMAR K:TWA 50 ppm (175 mg/m3);Skin;Carcinoge. DEL-FINLAND:TWA 100 ppm (350 mg/m3);STEL 250 ppm (B70 mg/m3). DEL-FRANCE:TWA 100 ppm (360 mg/m3);ST EL 500 ppm (1800 mg/m3). DEL-GERMANY:TWA 100 ppm (360 mg/m3);Carcinoge n. DEL-HUNGARY:STEL 10 mg/m3;Carcinogea. DEL-JAPAN:TWA 100 ppm (350 mg/m3); OEL-THE NETHERLANDS:TWA 100 ppm (350 mg/m3);STEL 500 ppm. OEL-TH E PHILIPINES:TWA 500 ppm (1740 mg/m3), DEL-PDLAND:TWA 50 mg/m3. DEL-TH E PHILIPINES:TWA 500 ppm (1740 mg/m3), DEL-SWEDEN:TWA 350 ppm (120 mg/m3);STEL 70 ppm (25 mg/m3);Stel 500 mg/m3;STEL 500 mg/m3);STEL 500 ppm. DEL-THAILAND:TWA 500 mg/m3;STEL 1000 ma/m3. DEL-TURKEY:TWA 50 500 PPM, DEL-THAILANDITWA 500 mg/m3/STEL 1000 mg/m3. DEL-TURKEYITWA 50 0 ppm (1740 mg/m3), DEL-UNITED KINGDOMITWA 100 ppm (350 mg/m3) STEL 25 O PPB. DEL IN BULGARIA, COLOHBIA, JORDAN, KOREA check ACGIH TLV. DEL I N NEW ZEALAND, SINGAPORE, VIETNAM check ACGI TLV

ACC14930

Wethane, dichloro- can be found on the following state right to know

**** SECTION 16 - ADDITIONAL INFORMATION ****

FROM

ß

ព

Ň

02-20 .

998.

8608

	NSOS Creation Date: 1/11/1995 Revision #50 Date: 12/12/1997	
	The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of	
•		ر
	merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular perposes. In no way shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, houseever arising, even if Fisher has been advised of the possibility of such damages.	J
•		ار
		J
		•
×		
		J.
		2
		امر.
•		
		 '
		A

Trichlørsethylene 23850	
**** SECTION 1 - CHENICAL PRODUCT AND CONPANY IDENTIFICATION ****	
NSOS Name: Trichloroethylene	
Cataleg Numbers: 580327ACS-1, 580327ACS-2, NC9323848, 580232, 580237ACS-1, 580237AC5-2, T340 4, T340-4, T3404, T341 20, T341 4, T341 500, T341-20, T341-4, T341-500 T34120, T3414, T341500, T341J4, T403 4, T403-4, T4034 Symmityps:	
Ethylene trichloride, tricleme, trichloroethene, benzinol cecolene Company Identification: Fisher Scientific 1 Reagent Lane Fairlaun, NJ 07410	
For information, call: 201-796-7100 Emergency Number: 201-796-7100 For CHENTREC assistance, call: 800-424-9300 For International CHENTREC assistance, call: 703-527-3887	

79-01-6 Trichloroethylene 100 201-167-4 ----

Hazard Symbols: XN Risk Phrases: 40 52/53

<u>و</u>۲. Ŕ

#775

4 in.

02-20

1998,

8608

490

412

FISHER SCIENTIFIC

FROM

**** SECTION 3 - HAZARDS IDENTIFICATION ****

EMERGENCY OVERVIEW

Appearance: clear, colorless, Warning! Kay cause central nervous system depression, Aspiration hazard. May cause liver damage. May cause reproductive effects based open animal studies. Causes eye and skin irritation. May cause respiratory and digestive tract irritation: May cause cancer based on animal studies. Potential cancer hazard. Target Organs: Central nervous system, liver.

Peterbudi Haalth Effecte

Eye: Causes moderate eye irritation. Kay result in corneal injury. Contact produces irritation, tearing, and burning paim. Skin:

Causes mild skin irritation. Prolonged and/or repeated contact may cause defatting of the skin and dematitis. May cause peripheral nervous system function impairment including persistent neuritis, and tenporary loss of touch. Damage to the liver and other organs has been observed in workers who have been overexposed.

Ingestianı

Б

۵

4

ï

1998,05-20

8608

490

412

SCIENTIFIC

: FISHER

FROM

Aspiration hazard. May cause irritation of the digestive tract. Aspiration of material into the lungs may cause chemical pneumonitis, which may be fatal.

Inhalation:

Inhalation of high concentrations may cause central nervous system effects characterized by headache, dizziness, unconsciousness and coma. May cause respiratory tract irritation. May cause liver abnormalities. May be harmful if inhaled. May cause peripheral aervous system effects.

Chronic:

Passible cancer hazard based an tests with laboratory animals. Chronic inhalation may cause effects similar to those of acute inhalation. Prolonged or repeated skin contact may cause defatting and dermatitis. May cause peripheral nervous system function impairment including persistent neuritis, and temporary loss of touch. Damage to the liver and other organs has been observed in workers who have been overexposed.

**** SECTION 4 - FIRST AID NEASURES ****

Eyest

Innediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower lids. Get medical aid innediately.

Skinı

Get medical aid if irritation develops or persists. Flush skin with plenty of scap and water.

Ingestion

If victim is conscious and alert, give 2-4 cupfuls of milk er water. Never give paything by mouth to an unconscious person. Possible aspiration hazard. Get medical aid immediately. Inhalation:

Get medical aid immediately. Remove from exposure to fresh air inmediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Notes to Physician:

ACC23850

Treat symptomatically and supportively.

**** SECTION 5 - FIRE FIGHTING NEASURES ****

General Information:

As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Vapors can travel to a source of ignition and flash back. Combustion generates toxic fumes. Containers may explode in the heat of a fire. Extinguishing Media:

Use water spray to cool fire-expased containers. In case of fire use water spray, dry chemical, carbon dioxide, or chemical foam. Autoignilion Temperature: 778 deg F (414.44 deg C) Flash Point: Not applicable. NFPA Rating: health-2; flammability-1; reactivity-0 Explosion Limits, Lower: 12.5

Upper: 90.0

**** SECTION 6 - ACCIDENTAL RELEASE HEASURES ****

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks

Absorb spill with inert material, (e.g., dry sand or earth), then place into a chemical waste container. Remove all sources of ignition. Provide ventilation.

A+++ SECTION 7 - HANDLING and STORAGE ++++

Handling:

Wash thoroughly after handling, Use only in a well ventilated area. Ground and bond containers when transferring material. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Avoid ingestion and inhalation. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames.

Storage:

Ŕ

#77

12:44

1998,05-20

8608

400

Reep away from sources of ignition, Store in a tigntly closed container. Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances.

**** SECTION 8 - EXPOSURE CONTROLS, PERSONAL PROTECTION ****

Engineering Controls: Use adequate general or local exhaust ventilation to keep airborne concentrations below the permissible exposure limits.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
Trichloroelhylene	50 ppm ; 269 mg/m3; 100 ppm STEL; 537 ng/m3 STEL	NIOSH Potential Occupational Carcinogen - see Appendix C for sup plementary exposure limits 1000 ppm IOLH (not considering carcinogenic effects)	100 ppm TWA; C 200 ppm; C 200 ppm

DSHA Vacated PELs:

Trichlargethylene:

50 ppm TUA; 270 mg/m3 TUA

Personal Protective Equipment

Eyesi

Wear appropriate protective eyeglasses or chemical safety goggles as described by DSHA's eye and face protection regulations in 29 CFR 1910.133.

Skini

Wear appropriate protective gloves to prevent skin exposure.

Clothing:

Wear appropriate protective clothing to prevent skin exposure.

8628

-50

P.33/

#775

12:45

1998, 05-20

FROM

in the second se		l Vice - Holing Very P
_` م	REQUERTER: BURKHART, MIKE ACC23850 05/20/98 PAGE 5)
P.34/7	Respirators: Follow the OSHA respirator regulations found in 29CFR 1910,134, Always use a NIOSH-approved respirator when necessary.	
5775	**** SECTION 9 - PHYSICAL AND CHENICAL PROPERTIES ****	1
4 N # *	Physical State: Liquid Appearance: clear, cnlorlæss Odor: sweetish odor - chloraform-like pH: Not available.	
13	Vaper Pressure: 58 mm Hg @20C Vapor Density: 4.53 Evaporation Rate: 0.69 (CC14=1)	_!
0 5 - 20	Viscosity: 0.0055 poise Boiling Point: 189 deg F Freezing/Melting Point: -121 deg F Decomposition Temperature: Not available.	1
1998,05	Solubility: Insoluble in water, Specific Gravity/Density: 1.47 (water=1) Holecular Formula: C2HC13 Holecular Weight: 131.366	2
·	++++ SECTION 10 - STABILITY AND REACTIVITY ++++	-'
•/	Chemical Stability; Stable under normal temperatures and pressures. Conditions to Avoid: Incompatible materials, ignition sources, exidizers.	لمس
8608 . Ø	Incompatible materials, ignition sources, exidizers. Incompatibilities with Other Materials: Alkalis (sodium hydroxide), chemically active metals (aluminum, berylliun, lithium, magnesium), epoxies and exidants. Can react violently with aluminum, barium, lithium, magnesium, liquid exygen, orone, potassium hydroxide, petassium nitrate, sodium, sodium hydroxide, titanium, and nitrogen dioxide. Reacts with water under heat and pressure to form hydrogen chloride gas.	·
412 490		
	Hydrogen chloride, carbon dioxide, chloride fumes. Hazardous Polymerization: Has not been reported.	-
•	**** SECTION 11 - TOXICOLOGICAL INFORMATION ****	
	RTECS#1	
ប		
	\cdot	-
С И И		
LINICHER 		
π Σ		
FR.		- `

۰.

.

 \mathbf{i}

_)

ړ

1


Į.

1

-)
÷ —	CR34 79-01-81 KX4330000	
ЦС ЦС	L050/LC50; CAS# 79-91-6; Inhalation, mouse: LC50 =8450 ppm/4H; Dral, mouse:	
0	LOSO = 2402 mg/kg Oral, rati $LOSO = 5650 mg/kg$ Skin, rabbit; $LOSO =$	
ທ)20 gm/kg,	
F	Carcinogenicity: Trichlorsethylene -	
* _	ACEIH: AS-not suspected as a human carcinogen	
	Califernia: carcinogen - initial date 4/1/88	
4	NIOSH) occupational carcinogen OSHAI fossible Select carcinogen	
N -	IARCI Group 2A carcinagen	
-	Epidemio logy (
	Suspected carcinogen with experimental carcinogenic, tumorig	
- 3	enic, and teratogenic data. Teratogenicity:	
i un	No information available.	
8	Reproductive Effects: Experimental reproductive effects have been observed.	
8 -	Neurotoxicity!	
5	No information available.	
	Nutagenicity	
•	Human nutation data has been reported. IARC and the National Toxicology Program (NTP) stated that variability in the mutagencity	
	test results with thichloroethylene may be due to the presence of	•
	variaas stabilizers used in TCE which are mutagens (e.g. epaxybutane, epichlorahydrin).	
-	Other Studies	
	None.	
8608	++++ SECTION 12 - ECOLOGICAL INFORMATION ++++	
B B		
Ø	Ecoloxicity:	
4	Blwegill sunfish, LO50= 44,700 yg/L/96Hr. Fathead minnow, LC50=40.7 ng/L/96Hr.	
N N	Environmental Fater	
4	In mir, substance is photoaxidized and is reparted to form phosgene, dichlorpacety1 chloride, and formy1 chloride. In water, it	

dichloroacetyl chloride, a evaporatos rapidly. Physical/Chemical: No information available. Other: None.

.

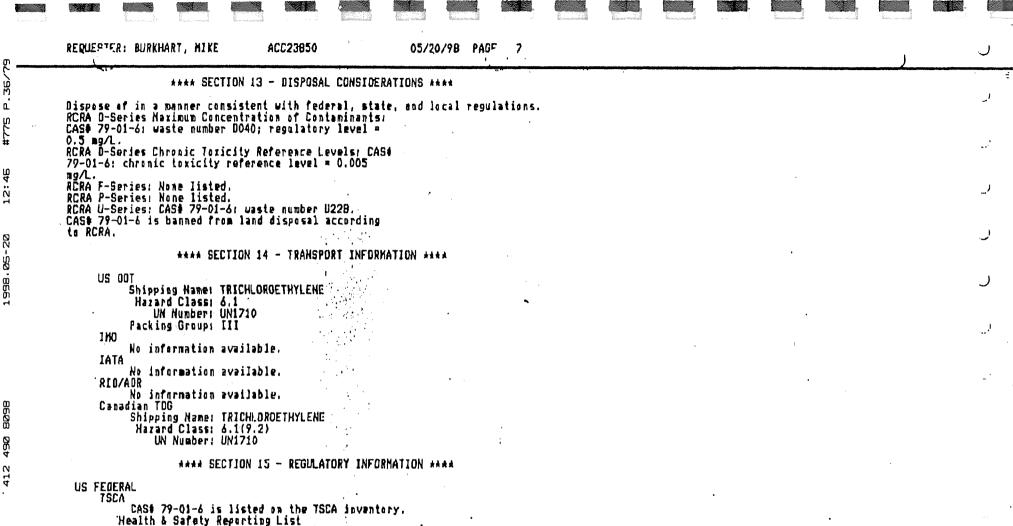

None of the chemicals are on the Health & Safety Reporting List. Chemical Test Rules None of the chemicals in this product are under a Chemical Test Rule.

		. <u>-</u>
~	REQUEPTER: BURKHART, KIKE ACC23850 05/20/98 PAGE 8	J
Р. 37/72 -	Section 12b None of the chemicals are listed ander TSCA Section 12b. TSCA Significant New Use Rule None of the chemicals in this material have a SNUR under TSCA:	ال
#775 (SARA Section 302 (RQ) final RQ = 100 pounds (45,4 kg) Section 302 (TPQ)	(.
12:46	None of the chemicals in this product have a TPQ. SARA Codes CAS # 79-01-6: acute, chronic, reactive. Section 313 This painting total contains total particulars (CAS# 79-01-6: 100%) which	ر -
0 N	This material contains Trichloroethylene (CAS# 79-01-6, 100X),which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373. Clean Air Act: PACE 120-01-6 is listed as a basadowy air collutant (MAR))
1998, ØS -	CAS# 79-01-6 is listed as a hazardous air pollutant (HAP). This material does not contain any Class 1 Ozone depletors. This material does not contain any Class 2 Ozone depletors. Clean Water Act: CAS# 79-01-6 is listed as a Hazardous Substance under the CWA.	J
	CAS# 79-01-6 is listed as a Priority Pollutant under the Clean Water Act. CAS# 79-01-6 is listed as a Toxic Pollutant under the Clean Water Act.	J
	OSHAI None of the chemicals in this product are considered highly hazardous by DSHA. STATE	
8608 8	Trichloroethylene can be found on the following state right to know Lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts. The following statement(s) is(are) made in order to comply with	
412 490	the California Safe Drinking Water Act: WARNING: This product contains Trichloroethylene, a chemical known to the state of California to cause cancer.	
	California No Significant Risk Level: CAS# 79-01-6: ingestion: no significant risk level = 50 ug/daý; inhalat European/International Regulations European Labeling in Accordance with EC Directives Hazard Symbols: XN Risk Phrases: R 40 Possible risks of irreversible effects.	
SCIENTIFIC		
FISHER S		
FROM :		

.

, .

2.52/33 Hermfel to equatic organisms, may cause long-term adverse effects in the aquatic environment. Safety Phrasesi	
 S 23 Do not inhale gas/fumes/vapour/spray. S 36/37 Wear suitable protective clothing and gloves. S 61 Avoid release to the environment. Refer to special instructions/Safety data sheets. WGK (Water Danger/Protection) CASt 79-01-6: 3	
Canada CAS4 79-01-6 is listed on Canada's DSL/NDSL List. This product has a WHMIS classification of D1B, D2B. CAS4 79-01-6 is not listed on Canada's Ingredient Disclosure List. Exposure Limits	
CASW 79-01-61. CEL-AUSTRALIA:TWA SC ppm (270 mg/m3);STEL 200 ppm (108 0 mg/m3). OEL-BELCIUM:TWA 50 ppm (269 mg/m3);STEL 200 ppm (1070 mg/m3) . OEL-CZECHOSLOVAKIA:TWA 250 mg/m3;STEL 1250 mg/m3. OEL-DENKARK:TWA 30 ppm (160 ng/m3). OEL-FINLAND:TWA 30 ppm (160 mg/m3);STEL 45 ppm (240 mg/m3);Skin. OEL-FRANCE:TWA 75 ppm (405 mg/m3);STEL 200 ppm (1080 mg/m 3). DEL-DERMANY:TWA 50 ppm (270 mg/m3);Carcinogen. OEL-HUNGARY:TWA 10 ng/m3;STEL 40 mg/m3. OEL-JAPAN:TWA 50 ppm (270 mg/m3). OEL-THE NETHERL ANDS:TWA 35 ppm (190 mg/m3);STEL 100 ppm. OEL-THE PHILIPPINES:TWA 100 ppm (535 mg/m3). DEL-POLAND:TWA 50 ng/m3. OEL-THE PHILIPPINES:TWA 100 ppm (535 mg/m3). DEL-POLAND:TWA 50 ng/m3. OEL-RUSSIA:TWA 50 ppm;STEL 1 0 ng/m3. OEL-SWEDEN:TWA 10 ppm (50 ng/m3);STEL 25 ppm (140 mg/m3). OEL -THAILAND:TWA 100 ppm;STEL 200 ppm. 0EL-TURKEY:TWA 100 ppm (535 mg/m3) . OEL-UNITED KINDODH:TWA 100 ppm (535 mg/m3);STEL 150 ppm;Skin. OEL IN BULGARIA, COLOMBIA, JORDAN, KDREA check ACGIH TLV. OEL IN NEW ZEALAND , SINGAPORE, VIETNAM check ACGI TLV	
**** SECTION 16 - ADDITIONAL INFORMATION ****	
HSDS Creation Date: 2/10/1995 Revision #15 Date: 12/12/1997	

ر

J

ار

ر

. !

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no way shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of

#775 P.38

4

12:

1998,05-20

8608

490

412

FROM : FISHER SCIENTIFIC

...

	the possibility of such damages.	
)
		`ب_ '
•	에는 것이 있는 것이 있는 것이 가지 않는 것이 있다. 이상에 가지 않는 것이 있는 것이 가 같은 것이 있는 것이 있는 것이 같은 것이 있는 것 같은 것이 같은 것이 있는 것	
		-
		یر بر ا

••

				a contract dama	Hulashari a sanahari ya	a contraction of the second se	Lange generation	Erenay - ang
- m	REQUESTER: BURKHART, NIKE ACCO9390	05/20/98 P	AGE 1			l		Ċ
P.40/79	1,2-Dichloroethane 09390	X T N T						* 1
#775 (**** SECTION 1 - CHENICAL PRODUCT AND COMPANY 1	IDENTIFICATIO	N ****					,
¥ _	HSDS Name: 1,2-Dichlaroethane Catalog Numbers:							5
12:47 i	\$79997, \$79997\$PEC, 8P1100-500, E175 20, E175 4, E E175-500, E17520, E1754, E1754LC, E175500, E175J4, Synonyms:		25-20, E175-4, 20-4, E1904),
	Ethylene dichloride, 1,2- ethylene dichloride, gly dichloride,ethane 1,2-dichloro- Company Identification: Fisher Scientific 1 Reagent Lame Fairlawn, NJ 07410	YC0 I						J
1998, ØS-20	For information, call: 201-796-7100 Emergency Number: 201-796-7100 For CHENTREC assistance, call: 800-424-9300 For International CHENTREC assistance, call: 703-327-30	887						ر
۰.	**** SECTION 2 - COMPOSITION, INFORMATION DN		****		ł .		•	2
	CASI Chemical Name	X	EINECS					i
) 107-06-2 Ethanæ, 1,2-dichlæra-	100	203-458-1				•	-
8608	Hazard Symbols: T F Risk Phrases: 11 22 36/37/38 45							
490	**** SECTION 3 - HAZARD9 IDENTIFICAT	10N ****	, . , .					
4 S14	EHERGENCY OVERVIEW Appearance: colourless, Flash Point; S0 F. Warning! Flammable liquid, May cause central nervous sy depression, May cause liver and kidney damage. Causes o respiratory tract irritation. May cause severe eye and irritation with possible burns. May cause cancer based	ystem digestive and skin on animal	I	· .				
	 studies. Target Organs: Kidneys, central nervous system, liver. 							
۰.								
FROM :FISHER SCIENTIFIC								
۵. ۲. ۲.								•
υ. Ω								
<u>۳</u> ۵۲								,
μ. Σ								
FRO /	····							

.

.

1998, 05-20

۰.

m

#775 P.41/

12:48

. 1998,05-20

8608

412 490

FROM : FISHER SCIENTIFIC

-

.

			and the second se	
	lealth Errects			
Eyei	and width Manual an owner second burns and seadble			
	Contact with liquid or vapor causes severe burns and possible			
Skint	irreversible eye damage. Vapors nay cause eye irritation.			
	xposure may cause irritation and possible burns. Kay be absorbed			
	through the skin.			
Ieges				
	lay cause central nervous system depression, kidney damage, and			
	liver damage. May cause gastrointestinal irritation with nausea, vomiting and diarrhea. May cause effects similar to those for			
	ibhalation exposure.			
	ation:			
	Inhalation of high concentrations may cause central nervous system			
	effects characterized by headache, dizziness, unconsciousness and			
	come. Causes respiratory tract irritation. Kay cause liver and kidney			
	lamage.		•	
Chron				
	Possible cancer hazard based on tests with laboratory animals.			
	Prolonged or repeated skin contact may cause dermatitis. Prolonged or			
	repeated eye contact may cause conjunctivitis. May cause liver and			
	tioney demege, and the second conjunctive and the second construction of th			
	venuél nemaleté szere szerelő televező ésete szere veltése szerelő a szerelő szerelő szerelő szerelő szerelő s			
	**** SECTION 4 - FIRST AID MEASURES ****			
			1	•
Eyes:	in the second			
	Innediately flush eyes with plenty of water for at least 15 minutes,			
	occasionally lifting the upper and lower lids. Get medical aid	•		
	immediately.			
Skint				
	Get medical aid. Flush skin with plenty of scap and water for at			
	least 15 minutes while removing contaminated clothing and shoes.			
Inges	tion: Hereita de la companya de la c			
	If victim is conscious and alert, give 2-4 cupfuls of milk or water.			
	Get medical aid immediately.			
	ation Republic Providence State (State State Stat			
	Get medical aid immediately. Remove from exposure to fresh air			
	Innediately. If not breathing, give artificial respiration. If			
- 2 ¹	breathing is difficult, give caygen.			
	to Physiciani			
	Treat symptomatically and supportively.			
Antid				
	Hone reported,			

		and advantaged from the second s		tainer the second terms	
r m	REQUERTER: BURKHART, KIKE ACC09390 05/20/98 PAGE 3			·)	J
57/2	**** SECTION 5 - FIRE FIGHTING MEASURES ****				,
775 P.4	General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSKA/NIDSK (approved or equivalent), and full protective gear. Vapors can travel to a source of ignition and flash				_ ' ,
12:48 #	back. Extinguishing Media: For small fires, use dry chemical, carbon dioxide, water spray or alcohol-resistant foam. Use water spray to cool fire-exposed containers. Water may be ineffective. Autoignition Temperature: 775 deg F (412.78 deg C)				لہ
5-20	Flash Point: 58 deg F (14.44 deg C) NFPA Rating: health-2; flanmability-3; reactivity-0 Explosion Limits, Lower: 6.2 Upper: 15.9				Э
18, Ø5	**** SECTION 6 - ACCIDENTAL RELEASE HEASURES ****				
1998	General Information: Use proper personal protective equipment as indicated in Section 8. Spills/Leaks:				,
	Absorb spill with inert material, (e.g., dry sand or earth), then place into a chemical waste container. Remove all sources of ignition. Use a spark-proof tool.		• I		
	**** SECTION 7 - HANDLING and STORAGE ****			•	
412 490 8098	Handling: Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use only in a well ventilated area. Use with adequate ventilation. Do not get on skin and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangeraus. Xeep container tightly closed. Avoid contact with heat, sparks and flame. Do not ingest or inhale. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames.				-
	Storage; Keep away from heat, sparks, and flame. Store in a tightly closed container. Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances.				
					-
SCIENTIFIC					
: FISHER		•			•

FROM : FISHER SCIENTIFIC

•

EXPOSURE CONTROLS, PERSONAL PROTECTION JECTION D

Engineering Controls: Local exhaust ventilation may be necessary to control any air contaminants to within their TLVs during the use of this product.

3

Exposure Limits Chemical Name ACGIH NIDSH OSHA - Final PELS 1 ppm TVA; 4 ng/m3 TVA; NIOSH 50 ppm TWA: C 100 Ethane, 1,2-dichler 10 ppm ; 40 mg/m3 ppm; C 100 ppm 0-Potential Occupational Carcinogen - see Appendix A ; see Appendix C for supplementary exposure limits SO ppm IDLH (not considering carcinogenic

OSHA Vacated PELs: Ethane, 1,2-dichloro-:

1 ppm TUA; 4 mg/m3 TUA

Personal Protective Equipment

Eyes:

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133.

Skint

Wear appropriate protective ployes to prevent skin exposure,

effects)

Clethingr

Wear appropriate protective clothing to prevent skin exposure.

Ruspirators:

Follow the OSHA respirator regulations found in 29CFR

a. #775 12:49 1998, 05-20

43

	REQUERTERI BURKHART, MIKE	ACC09390 05/20/98	•				ر.
		134. Always use a Niusk-approved res sary.	pirater Unen				•
	**** SECTION 9	- PHYSICAL AND CHEMICAL PROPERTIES *	khi .				'م.
	Appearance: Odor: pH:	Liquid colaurless chloroform-like Nat available	·				Ĵ
	Vapor Density: Evaporatian Rate: Viscosity:	66 mm Hg Q 20 C 3.5 (Air=1) 0.3 (Buty] acstate=1) Not available.					J
	Freezing/Melting Point: Decomposition Temperature: Solubility:	181 deg F -31.9 deg F Not available, Silghtly soluble in water					.,l
	Holecular Fermula:	1,26 (Water=1) C2H4C12 98,934					ı
	++++ SECTIO	N 10 - STABILITY AND REACTIVITY ****					
	Chemical Stability: Stable,			•	I		
	' sparks.	ials, ignition sources, excess heat,	electrical			•	ل
	bases, roganic per acid. Explosions i and Jiquid anmonia Hazardous Decomposition Hydrogen chloride	with strong oxidizers, aluminum, keto oxides, alkali metals, reducing agen nave occurred with with mixtures of t o or dimethylamisopropylamine. n Products: , carbon monoxide, carbon dioxide,	ts or nitric				
		on: Has not been reported.			•		•
		<pre># 11 - TOXICOLOGICAL INFORMATION ****</pre>					
٠	RTECS#1 CAS# 107-06-21 R1(0525000	•				
	LD50/LC501 CAS4 107-06-2: Ini	alation, rat: LC50 =1000 ppm/7H; Dra	1. mozse: 1050		,		

٠

.

- 1

. ·

#775 P.44/79

12:49

1998,05-20

.412 490 8098

÷

•

Carcinogenicity:

Ethane, 1,2-dichloro- -ACBIH: A4 - Not Classifiable as a Human Carcinogew Califernia: carcinogen - initial date 10/1/87 NIOSH: occupational carcinogen NTP: Suspect carcinogen DSHA: Possible Select carcinogen IARC: Group 28 carcinogen Epidemiology: No data available. Teratogenicity May cause decreased fertility and other adverse effects in pregnast female rats and the progeny of the first generation, but not of the second, by giving them repeated 4-hr/day exposures to 57 mg/m3. Death, Ihl-rat, TCLo=20100 ug/n3/1H (female 7-140 post); Stanted fetus, Gral-rat, TDLo=1260 mg/kg (6-150 preg) Developmental abnormalities; Craniofacial, Ihl-mouse, TCLo=100 ppm/7H (female 6-150 post); Musculoskeletal, Oral-rat, TDLo=1260 mg/kg (6-150 preg) Reproductive Effects: No data available. Negratoxicity: No data available. Kutagenicity This material may have motagenic potential at high concentrations, but the relationship of mutagenesis and carcinogenic effect is not yet clear because activity for the two responses is not consistent between organs or species. Other Studies: None, **** SECTION 12 - ECOLOGICAL INFORMATION **** Ecotoxicity:

ACC09390

mg/kg; Skin, rabbit: L050 = 2800 ng/kg.

= 413 Mg/kg) Ufal, Fabbit: LUSU = B60 Mg/kg; Ufal, Fat: LUSU = 6/0

This chemical is expected to cause little exygen depletion in aquatic systems. It has a low potential to affect aquatic organisms. Sheepshead minnow: 24-,48-, and 96-hr. LC50=8T130 mg/L,LT320 mg/L; Bluegill sunfish: 96-hr. LC50=550 mg/L/; Water flea: 24-and 48-hr.LC50=250 mg/L and 220mg/L; Bribe shrimp: 24-hr.LC50=320 mg/L. Environmental Fater This material is not likely to bioconcentrate.

Physical/Chemical:

FROM

8228

490

412

ŋ

ra a la constante la constante la constante				
_ :	REQUESTER: BURKHART, NIKE ACCOP390 05/20/98 PAGE 7		· ,	
	Other: None.			
	**** SECTION 13 - DISPOSAL CONSIDERATIONS ****			
	Dispose of in a manner consistent with federal, state, and local regulations. RCRA D-Series Maximum Concentration of Contaminants: CASE 107-06-2: waste number DO28; regulatory level ::			,
	0.5 mg/L. RCRA D-Series Chronic Toxicity Reference Levels: CAS# 107-06-2: chronic toxicity reference level = 0.005 mg/L.			
	RCRA F-Series: None listed, RCRA P-Series: None listed, RCRA U-Series: CAS\$ 107-06-2; waste nomber U077, CAS\$ 107-06-2 is banned from land disposal according to RCRA.			
	AAAA SECTION 14 - TRANSPORT INFORMATION ****			
	US DOT Shipping Name: ETHYLENE DICHLORIDE-POISON Hazard Class: 3 UN Number: UN1184	•		
	Packing Group: II IMO Ho information available.			
	IATA No information available. RID/ADR No information available.			
	Canadian TDG Shipping Name: ETHYLENE DICHLORIDE Hazard Class: 3(6,1)(9,2) UN Number: UN1184			
	Other Information: FLASHPOINT 13 C			
	**** SECTION 15 - REGULATORY INFORMATION ****	•		
•	US FEDERAL TSCA CAS‡ 107-06-2 is listed on the TSCA inventory.			
	·			
	tin and the second s			

.

`**-** - '

)

HEALCH & SATELY REPORTING LISC CAS# 107-06-21 Effective Date: June 1, 1987; Sunset Date: June 1, 1997 Chemical Test Rules None of the chemicals in this product are under a Chemical Test Rule. Section 12b None of the chemicals are listed under TSCA Section 12b. TSCA Significant New Use Rule None of the chemicals in this material have a SNUR under TSCA. SARA Section 302 (RQ) fipal RQ = 100 pounds (45.4 kg) Section 302 (TPQ) None of the chemicals in this product have a TPQ. SARA Codes CAS # 107-06-2: acute, chronic, flammable. Section 313 This material ceptains Ethane, 1,2-dichloro- (CAS# 107-06-2, 100%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373. Clean Air Acti CAS# 107-06-2 is listed as a hazardous air pollutant (HAP). This material does not contain any Class 1 Ozone depletors. This material does not contain any Class 2 Ozone depletors, Clean Nater Acti CASH 107-06-2 is listed as a Hazardous Substance under the CWA. CAS# 107-06-2 is listed as a Priority Pollutant under the Clean Water Act. CAS# 107-06-2 is listed as a Taxic Pollutant under the Clean Water Act. OSHA1 None of the chemicals in this product are considered highly hazardous by OSHA. STATE Ethane, 1,2-dichloro- can be found on the following state right to knou lists, California, New Jersey, Florida, Pennsylvania, Minnesata, Hassachusetts. The following statement(s) is(are) made in order to comply with the California Safe Orinking Water Act: WARNIMMI This product contains Elhang, 1,2-dichloro-, a chemical known to the state of California to cause cancer. California No Significant Risk Level: CAS# 107-06-2; no significant risk level = 10 ug/day European/International Regulations

σ

n.

ı٨

h ...

g

Ň -

998, 05-20

Ē

8608

490

N

ഫ്

#775

រី

12:

1998,05-20

8608

490

412

FISHER SCIENTIFIC

FROM

]

_!

u u	I J DIKE	HLCVY370	vo/2	V/98 PAOP 7	
U Hazard Sy Risi Phra Safety Pi WGK (Water Dang CASJ 107 Canada	ring in Acco rubols: T F ases; R 22 H R 36/37 and ski R 45 H hrases; S 45 I nedical possibl S 53 A before er/Protectio -06-21 3	ruance with EC ighly flammable armful if sual /38 Irritating n. ay cause cancer n case of accic advice inmedia e). void exposure - use. n)	Directives oved. to eyes, respi , dent of if you f ately (show the obtain special	ratory system eel unwell, seek label vhere instructions	
CAS# 107 This pro CAS# 107 Exposure Limits CAS# 107 USTRALIA -BELGIUM OEL-FINL CE:TWA 10 g/m3;Car TWA 50 p L-RUSSIA m3);Skin /m3}, OE	duct has a W -06-2: DEL ITWA 10 PPN ITWA 10 PPN ANDITWA 10 P O PPN (40 mg cinogen. DEL Pm (200 mg/r ITWA 10 PPN, ICAR. DEL-SW L-TURKEY:TWA	HMIS classifica listed on Cana (40 mg/m3), OEL (40 mg/m3), OEL pm (40 mg/m3), DEL pm (40 mg/m3), /m3), DEL-GERM/ -JAPAN,TWA 10 (3), OEL-THE PHJ DEL-SWEDEN,TWA JITZERLAND,TWA 15 50 ppm (200 mg	of Egypt:1WA 5 -AUSTRIA:TWA 20 -DENMARK:TWA 1 STEL 20 ppm (80 AVY;Carcinogen ppm (40 mg/m3). ILIPPINES:TWA 50 A 1 ppm (4 mg/m3) 10 ppm (4 mg/m3) 10 ppm (4 mg/m3) 10 ppm (4 mg/m3) 10 ppm (4 mg/m3)		L-A OCL RAN DS: OE mg PPm
KOREA ch Coi tlv	eck ACDIH TL	V. DEL IN NEW 2	EALAND, SINGAPO	RE, VIETNAM check	A

A+++ SECTION 16 - ADDITIONAL INFORMATION ++++

HSOS Creation Date: 1/10/1995 Revision 411 Date: 12/12/1997

The information above is believed to be accurate and represents the best information corrently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users

	Suculd make their own investigations to determine the suitability of the information for their particular purposes. In no way shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howspever arising, even if Fisher has been advised of the possibility of such damages.			
,				
		· ·		
			·	-
				•
-			A	

HANN MATERIAL SAFETY DATA SHEET AND

ACC00140

Acetone 00140

'n

2:35

998, ØS-20

8098

490

N

SCIENTIFIC

: FISHER

FROM

SECTION 1 - CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

NSDS Name: Acetone Catalog Numbers:

AC177170200, AC400100025, AC400100040, AC423240040, AC423240200, S70090, S70091-1, S7025, A11 1, A11 20, A11 200, A11 4, A11-1, A11-20, A11-200, A11-4, A111, A11200, A114, A115 4, A115-4, A1154, A16F-15AL, A16P 4, A16P-4 A16P4, A165 20, A165 20 001, A165 4, A16S-20, A16S-4, A16S20, A16520001, A1654, A1654LC, A18 1, A18 20, A18 200, A18 200 001, A18 4, A18 500, A18-1, A18-20, A18-200, A18-4, A18-500, A181, A18500, A18200, A18200001, A1820LC, A1820LDT003, A184, A184LC, A184LUT001, A18500, A18200, A18200001, A1880LC, A1880LT003, A184, A184LC, A184LUT001, A18500, A18720, A18750, A188515, A188819, A1688200, A18850, A1885115, A1885200, A188529, A188550, A185 4, A185-4, A1854, A185K 4, A185K-4, A185K4, A185K4LC, A1855 200, A1855 50, A185-115, A1855-200, A1885-30, A1885-50, A1855200, A18550, A19 1, A19 4, A19-1, A19-4, A191, A194, A20-1, A40 4, A40-4, A404, A404L0T007, A404L0T008 A404L0T009, A928 4, A9284, A729 4, A729-1, A729-4, A7294L0T018, A7294L0T001, A7294L0T012, A7294L0T014, A7294L0T017, A7294L0T018, A7294L0T001, A7294L0T021, A7294L0T022, A7294L0T024, A7295200, A7295520, A79295200, A7297528, A7278550, A72955115, A74755200, A72955200, A7295528, A7275550, A730-4, A946 4, A946-4, A946F8200, A74688115, A9449815, A9448850, A749 1, A749 4, A74971, A74955-200, A7468815, A74955-20, A74975550, A746755-115, A7455-20, A747955-200, A74575520, A74575530, A74755515, A747555-115, A74755-20, A747955-200, A74575530, A74795550, A747555-10, A746785-115, A74758-4, A74755-200, A747555-30, A747555-30, A74755515, A74755200, A74758-4, A74755-200, A7457553, QUANT00184, S70091, S70091HPLC, S7009158EC

Synonyns:

Dimethylforbaldehyde, dimethyl ketone, 2-propanone, pyroacetic acid, pyroacetic ether Company Identification: Fisher Scientific

i Reagent Lane Fairlawn, NJ 07410 For information, call: 201-796-7100 Emergency Number: 201-796-7100 For CHEMTREC assistance, call: 800-424-9300 For International CHEMTREC assistance, call: 703-527-3887 **** SECTION 2 - COMPOSITION, INFORMATION ON INGREDIENTS ****

CAS‡	Chemical Name	×	EINECS
67-64-1	2-propanone	99	200-662-2

Hazard Symbols: F Risk Phrases: 11

**** SECTION 3 - HAZARDS IDENTIFICATION ****

EMERGENCY OVERVIEW

Appearance: colourless, Flash Point: -4 deg F. Danger! Extremely flammable liquid. May cause central nervous system depression. Hay cause liver and kidney damage. Causes eye and skin irritation. Gauses digestive and respiratory tract irritation. Target Drgans: Kidneys, central nervous system, liver, respiratory system

Potential Health Effects

Eye: Preduces irritation, characterized by a burning sensation, redness, tearing, inflammation, and possible corneal injury.

Skint

Exposure may cause irritation characterized by redness, drypess, and inflammation.

Ingestion:

May cause irritation of the digestive tract. May cause central nervous system depression, kidney damage, and liver damage. Symptoms may include: headache, ercitement, fatigue, nausea, vomiting, stupor, and cona.

Inhalation

Inhalation of high concentrations may cause central nervous system effects characterized by headache, dizziness, unconsciousness and come. Causes respiratory tract irritation. May cause liver and kidney damage. May cause motor incoordination and speech abnormalities.

Chronicr

Prolonged or repeated skin contact may cause dermatitis. Chronic inhalation may cause effects similar to those of acute inhalation.

**** SECTION 4 - FIRST AID MEASURES ****

FROM : FISHER

õ

5 ۵. #775

Β Ň.-

998, ØS-20

H.

8608

490

REQUES	ETER: BURKHART, KIKE ACCOOL40. 05/20/98 PAGE 3	 •
	Eyes: Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower lids, Get medical aid immediately.	
_	Skip: Flush skin with plenty of soap and water for at least 15 minutes while removing contaminated clothing and shoes. Get medical aid if irritation develops or persists.	
	Ingestion: If victim is conscious and alert, give 2-4 cupfuls of milk or water. Get medical aid immediately. Inhalation:	
ት	Get nedical aid immediately, Renove from exposure to fresh air immediately, If not breathing, give artificial respiration. If breathing is difficult, give axygen, Notes to Physician: Treat symptomatically and supportively.	
	**** SECTION 5 - FIRE FIGHTING NEASURES ****	
	General Information: Containers can build up pressure if exposed to heat and/or fire. As in any fire, wear a self-contained breathing apparatus in pressure-demand, HSHA/NIOSH (approved or equivalent), and full protective gear. Vapors can travel to a source of ignition and flash back. Use water spray to keep fire-exposed containers cool. Extinguishing Media: For small fires, use dry chemical, carbon dioxide, water spray or alcohol-resistant foam. For large fires, use water spray, fog, or	
F	alcohol-resistant foam. Autoignition Temperature: 869 deg F (465.00 deg C) Flash Point: -4 deg F (-20.00 deg C) NFPA Rating: health-1; flammability-3; reactivity-0 Explosion Limits, Lower: 2.5 Upper: 12.8	
	**** SECTION 6 - ACCIDENTAL RELEASE MEASURES ****	
	General Information: Use proper personal protective equipment as indicated in Section 8. Spills/Leaks: Absorb spill with inert naterial, (e.g., dry sand or earth), then	

,

· . :

-

-

#775 P.13/79

12:36 :

1998, ØS-2Ø

412 490 8098

·

J

place into a chemical waste container. Were appropriate provers clothing to minimize contact with skin. Remove all sources of ignition.

**** SECTION 7 - HANDLING and STORAGE ****

Handling:

÷.,

Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation, Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames.

1.2

Starage:

Keep away from sources of ignition. Store in a tightly closed container.

**** SECTION B - EXPOSURE CONTROLS, PERSONAL PROTECTION ****

Engineering Controls

Use process enclosure, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits.

Expessive Limits

Chemical Name	ACGIN	NIDSH	OSHA - Final PELs
2-propanene	500 ppm / 1188 mg/m3; 750 ppm STEL; 1782 mg/m3 STEL	250 ppm TWA; 590 mg/m3 TWA 2500 ppm IDLH (lower explosive level)	1000 ррл ТИА; 2400 mg/m3 ТИА

OSHA Vacated PELs: 2-propanents

750 ppg TVA: 1800 mg/m3 TVA

Personal Protective Equipment

Eyesi

Vear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face

FROM : FISHER

9

۵

490

412

1998, 05-20

 REQUERTERI BURKHART, MJ	KE ACCO0140 05/20/98 PAGF 5	არიაკვე ნების რო აკლ მცნეს აკეთვე მში ა _{ნდე} კების ოთანის. • .	
Skin; Clothing; Respirators;	Protection regulations in 27 CPR 1910.133. Wear appropriate protective gloves to prevent skin exposure. Wear appropriate protective clothing to prevent skin exposure. Follow the OSHA respirator regulations found in 29CFK 1910.134. Always use a NIDSH-approved respirator when necessary.		
**** SECT: Physical State: Appearance: Ddar: pH: Vapor Pressure: Vapor Density: Evaporation Rate: Viscosity: Boiling Point: Freezing/Melting Point Decomposition Temperate Solubility: Specific Gravity/Densi Molecular Formula: Molecular Weight:	are: Nøt available. Soluble,	1	
****	SECTION 10 - STABILITY AND REACTIVITY ****		

<u>ر</u>

.

ر

Chenical Stability: Stable, Conditions to Avoid: High temperatures, temperatures above 220&C. Incompatibilities with Other Materials: Forms explosive mixtures with hydragen peroxide, acetic acid, mitric acid, mitric acid+sulfuric acid, chromic anhydride, chromyl chloride, mitrosyl chloride, hesachloromelamine, mitrosyl perchlorate, mitryl perchlorate, permenosulfuric acid, thiodiglycol+hydrogen peroxide. Hazardous Decomposition Products:

p

P. 15/

#775

12:37

1998, ØS-20

8608

490

412

FISHER SCIENTIFIC

FROM

.

2

Hazardous Polymerization: Has not been reported.

**** SECTION 11 - TOXICOLOGICAL INFORMATION ****

ACC00140

RTECS

16/

#775 P

F

Ň

1998, 05-20

8608

490

412

SCIENTIFIC

: FISHER

FROM

. .

CAS4 67-64-11 AL3150000

CAS# 67-64-1; Inhalation, rat; LC50 =50100 mg/m3/8H; Oral, mouse; LD50 = 3 gm/kg; Oral, rabbit; LD50 = 5340 mg/kg; Oral, rat; LD50 = 5800 mg/kg; Skin, rabbit; LD50 = 20 gm/kg.

Carcinogenicity:

2-propanone -

ACGIH: A4 - Not Classifiable as a Human Carcinogen

Epidemiology: No information available.

Teratogenicity:

Ne information available.

Reproductive Effects:

Fertility: post-implantation mortality. Inl, mam: TCL0=31500 ug/m3/24H (1-130 preg)

Neurolexicity

No information available.

Kutagenicity: Cytogenetic analysis: hanster fibroblast, 40 g/L Sex chromosome loss/nan-disjunction: S.cerevisiae, 47600 ppn Other Studies:

None,

**** SECTION 12 - ECOLOGICAL INFORMATION ****

Ecotoxicity

Rainbau trout LC50=5540 mg/L/96H Sunfish (tap water), death at 14250 ppm/24H Mosquito fish (turbid water) TLm=13000 ppm/48H

Environmental Fate:

Volatilizes, leeches, and biodegrades when released to soil.

Physical/Chemical: No information available.

Other:

· Hone,

**** SECTION 13 - DISPOSAL CONSIDERATIONS ****

Hann listed.	Centralion of L	enteminants.	1				
RCRA D-Series Chronic Tex listed.		Levels: No	n e	۱			
RCRA P-Series: None liste RCRA U-Series: CAS# 67-64	d.	r U002					
Dipose of in a manner consistent with rederal; state, and incal regutations. RERA D-Series Harimun Concentration of Cantaminants: Name listed. RERA D-Series: None listed. RERA U-Series: None listed. RERA U-Series: None listed. RERA U-Series: CASE 67-64-1: waste number U002 (Ignitable waste). CASE 67-64-1 is banned from land disposal according to RERA. #### SECTION 14 - TRANSPORT INFORMATION #### US DOI Shipping Name: ACETONE Hazard Class: 3 UN Number: UNIOPO Packing Group: II INO Shipping Name: ACETONE Hazard Class: 3.1 UN Number: 1090 Packing Group: 2 IATA Shipping Name: ACETONE Hazard Class: 3 UN Number: 1090 Packing Group: 2 RID/ADR Shipping Name: ACETONE Hazard Class: 3 UN Number: 1090 Canadian IDG Shipping Name: ACETONE Haz							
**** SE	CTION 14 - TRAN	SPORT INFOR	NATION ###	A -			
Shipping Hane:	ACETONE	· · · ·					
UN Number: Packing Group:	UN1090						
Shipping Name: Hazard Class: UN Number:	3.1 · 1090			•			
IATA		• •					
Hazard Class: UN Number: Packing Group:	3 1090 ·	:					
Shipping Namer Dangerous Goods Coder	3(3B)	• .					
Canadian TDG Shipping Namer Hazard Classi	ACETONE	•		i			
UN Number: Other Information:	UN1090 FLASHPOINT -20	C		•			
	CTION 15 - PERI						

.

.

••

#775 P.17/79

12:38

1998,05-20

412 490 8098

-

REQUERTER: BURKHART, HIKE ACCOOLAO 05/20/98 PAGE 0	ل
CASE 07-04-1 is listed on the ISCA inventory. Health & Safety Reporting List	
None of the chemicals are on the Health & Safety Reporting List.	
Chemical Test Rules	
None of the chemicals in this product are under a Chemical Test Rule. Section 12b	
CAS# 67-64-1; export notification required - Section 4	
TSCA Significant New Use Rule None of the chemicals in this material have a SNUR under TSCA.	
SARA	*
Section 302 (RQ)	·
final $Rq = 5000$ pounds (2270 kg)	
Section 302 (TPQ) None of the chemicals in this product have a TPQ.	
SARA Codes	
CAS # 67-64-1: acute, chronic, flammable, sudden release of pressure.	
Section 313 No chemicals are reportable under Section 313.	
Clean Air Act;	
This naterial does not contain any hazardoùs air pollutants.	
This material does not contain any Class 1 Ozone depletorn. This material does not contain any Class 2 Ozone depletors.	
Clean Vater Act	
None of the chemicals in this product are listed as Hazardous	
Substances under the CWA. None of the chemicals in this product are listed as Priority	
Pollutants under the CVA.	
None of the chemicals in this product are listed as Toxic Pollutants under the CWA.	
OSHA1	
None of the chemicals in this product are considered highly hazardous	
by OSHA.	
2-propanone can be found on the following state right to know lists:	
California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts	
California No Significant Risk Level:	
None of the chamicals in this product are listed.	
European/International Regulations European Labeling in Accordance with EC Directives	
Hatard Symbols: F	
Risk Phrases:	,
R 11 Highly flammable.	

, Manager Street, or

·, ·

e de la constance de la constan Esta de la constance de la const

-oteroanterry

FROM : FISHER SCIENTIFIC

6 Q.

`.

••

14

#775 P.18/79

12:38

1998, 05-20

412 490 8098

Safety Phrasest S 16 Keep away from sources of ignition - No smoking.

S 33 Take precautionary measures against static .

discharges.

5.9 Keep container in a well-ventilated place.

S 23C Do not breathe vapour.

ACC00140

W6K (Water Danger/Protection)

CAS# 67-64-11 0

Cənədə

CA5# 67-64-1 is listed on Canada's DSL/NDSL List.

This product has a WHMIS classification of B2, D2B.

CAS# 67-64-1 is not listed on Canada's Ingredient Disclosure List, Exposure Limits

CASU 67-64-1:. DEL-AUSTRALIA:TWA 500 PPD (1185 mg/m3);STEL 1000 PPD, DEL-AUSTRIA:TWA 750 PPM (1780 mg/m3), DEL-BELGIUN:TWA 750 PPM (1780 mg/r3);STEL 1000 PP. DEL-CZECHOSLOVAKIA:TWA 800 mg/m3;STEL 4000 mg/m3. D EL-DENMARK:TWA 250 PPM (600 mg/m3), DEL-FINLAND:TWA 500 PPM (1200 mg/m3. D EL-DENMARK:TWA 250 PPM (600 mg/m3), DEL-FINLAND:TWA 500 PPM (1200 mg/m3. D GL-JAPANY:TWA 1000 PPM (2400 mg/m3), DEL-HUNGARY:TWA 600 mg/m3;STEL 120 O mg/m3, DEL-INDIA:TWA 750 PPM (1780 mg/m3);STEL 120 O mg/m3, DEL-INDIA:TWA 750 PPM (1780 mg/m3);STEL 120 D mg/m3, DEL-INDIA:TWA 750 PPM (1780 mg/m3);STEL 120 D mg/m3), DEL-JAPAN:TWA 200 PPM (470 mg/m3), DEL-THE NETHERLANDS;TWA 750 PPM (1780 mg/m3) JAN9, DEL-THE PHILIPPINES:TWA 1000 PPM (2400 mg/m3), DEL-P DLAND:TWA 200 mg/m3, DEL-RUSSIA:TWA 200 PPM;STEL 200 mg/m3, DEL-SWEDEN :TWA 250 PPM (600 mg/m3);STEL 500 PPM (1200 mg/m3), DEL-SWEDEN :TWA 250 PPM (1780 mg/m3);STEL 500 PPM (2400 mg/m3), DEL-SWEDEN :TWA 250 PPM (1780 mg/m3);STEL 500 PPM (1200 mg/m3), DEL-SWEDEN :TWA 250 PPM (1780 mg/m3);STEL 500 PPM (1200 mg/m3), DEL-SWEDEN :TWA 250 PPM (1780 mg/m3);STEL 500 PPM (1200 mg/m3), DEL-SWEDEN :TWA 250 PPM (1780 mg/m3);STEL 500 PPM (1200 mg/m3), DEL-SWEDEN :TWA 250 PPM (1780 mg/m3);STEL 500 PPM (1200 mg/m3), DEL-SWEDEN :TWA 250 PPM (1780 mg/m3);STEL 500 PPM (2400 mg/m3), DEL-SWEDEN :TWA 250 PPM (1780 mg/m3);STEL 500 PPM (2400 mg/m3), DEL-SWEDEN :TWA 250 PPM (1780 mg/m3);STEL 500 PPM (2400 mg/m3), DEL-SWEDEN :TWA 1000M:TWA 1000 PPM (2400 mg/m3);STEL 1250 PPM. DEL IN BULGARIA, C DLONBIA, JORDAN, KOREA check ACGIH TLV. DEL IN NEW ZEALAND, SINGAPORE, VIETNAN check ACGI TLY

SECTION 16 - ADDITIONAL INFORMATION

NSOS Creation Date: 11/30/1994 Revision 440 Date: 12/12/1997

The information above is believed to be accurate and represents the best information currently available to us. However, we make no varranty of merchantability or any other varranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no way shall Fisher be liable for any claims, losses, or danages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary danages, howsover arising, even if Fisher has been advised of

σ

۵

#775

田内

N

05-20

1998,

	CIP PESSIBILITY OF SUCH C	12K8985;					
					·		
		• •					
	• · · · · · · · · · · · · · · · · · · ·						
		Ale gran de la composition de la composit	•				
	· · · ·						
		•					
			:				
					-		
	· · · · ·			·			
٠							
	•						
	•						
		: .			•		

Nethyl Ethyl Ketone 14460

**** SECTION 1 - CHEMICAL PRODUCT AND COMPANY IDENTIFICATION ****

HSOS Name: Hethyl Ethyl Ketone

Catalog Numbersi

N

n

#775

12:39

05-20

-

8608

412 490

SCIENTIFIC

: FISHER

FROM

AC149670200, AC149670250, S80081, DP209R8-115, BP209R8-19, BP209R8-200, 8P209R8-50, BP209R5-200, BP209R5-50, BPM209R8-115, BPM209R8-19, BPM209R8-200, BPM209R8-50, BPM209R5-200, BPM209R5-28, BPM209R5-50, DWM2084, H209R8115, H209R819, H209R8200, H208 1, H208 20, H208 4, H208-1, H208-20, N208-4, K2081, M20820, N2084, M209 1, M209 20, M209 4, M209 500, M209-1, H209-20, M209-200, K209-4, N209-500, K2091, M20920, K209200, H20920LC, H2094, M209500, H209F8115, M209F819, H209F8200, M209F850, K209R8115, M209R819, M209R8200, K209F8115, M209F8200, M209F850, N209F8115, M209R819, M209F8200, K209F8115, M209R5200, M209R550, N209S 4, M209G-4, M209S4, M209S5115, M209S5200, M209S520

Synonyms:

2-Batanone, ethyl methyl ketone, MEK, methylacetone, 2-axobutane. Company Identification: Fisher Scientific 1 Reagent Lane Fairlawn, NJ 07410 For information, call: 201-796-7100

Emergency Number: 201-796-7100 Far CHENTREC assistance, call: 800-424-9300 For International CHENTREC assistance, call: 703-527-3887

******** SECTION 2 - COMPOSITION, INFORMATION ON INGREDIENTS ****

.			
CASŧ	Chemical Name	X	· EINECS#
78-93-3	Hethy] ethy] ketone	>99X	201-159-0
V			

Hazard Symbols: XI F Risk Phrases: 11 36/37

++++ SECTION 3 - HAZARDS IDENTIFICATION ++++

EMERGENCY OVERVIEW Appearance: Not available, Flash Point: -7 deg C, Danger! Extremely flammable liquid. May cause respiratory tract

ì

IPPITATION. May cause central nervous system effects. May cause severe eye and skin irritation with possible burns. May cause digestive tract irritation with nausea, voniting, and diarrhea. May cause fetal effects. Target Organs: Central nervous system,

Potential Health Effects

Eyei

<u>ور</u>

P. 22/

#775

12:40

1998,05-20

8608

60 60 60

412

Caases eye irritation. Nay result in corneal injury. Skin:

Hay be absorbed through the skin in harmfol amounts. Prolenged and/or repeated contact may cause irritation and/or dermatitis. Ingestion:

May cause irritation of the digestive tract. Nay cause central nervous system depression, characterized by excitement, followed by headache, dizziness, dreusiness, and nausea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure.

Inhalation:

Inhalation of high concentrations may cause central nervous system effects characterized by headache, dizziness, unconsciousness and coma, Causes respiratory tract irritation. Irritation may lead to chemical pneumonitis and pulmonary edema. May cause numbress in the extremities.

Chronic:

Chronic inhalation may cause effects similar to those of acute inhalation. Prolonged or repeated skin contact may cause defatting and dermatitis.

**** SECTION 4 - FIRST AID MEASURES ****

Eyesi

Flush eyes with plenty of water for at least 15 minutes,

occasionally lifting the upper and lower lids. Oet medical aid immediately. Do NUT allow victim to rub or keep eyes closed.

Skin:

Get medical aid. Rinse area with large amounts of water for at least 15 minutes. Remove contaminated clothing and shoes.

Ingestion

If victim is conscious and alert, give 2-4 cupfuls of milk or water. Get medical aid immediately.

Inhalation:

Get nedical aid innediately. Remove from exposure to fresh air

immediately. If not breathing, give artificial respiration.""IT breathing is difficult, give oxygen. Notes to Physician:

Treat symptomatically and supportively.

A*** SECTION 5 - FIRE FIGHTING MEASURES ****

General Information:

As in any fire, wear a self-centained breathing apparatus in pressure-denand, MSHA/NIOSH (approved or equivalent), and full protective gear, Vapors can travel to a source of ignition and flash baci. Flammable Liquid. Can release vapors that form explosive mixtures at temperatures above the flashpoint. Water may be ineffective. Material is lighter than water and a fire may be spread by the use of water.

Extinguishing Media:

For small fires, use dry chemical, carbon dioxide, water spray or alcohol-resistant foab. For large fires, use water spray, fog, or alcehol-resistant foan.

Autsignition Temperature: 404 deg C (759,20 deg F)

Flash Points -7 deg C (19.40 deg F) NFPA Ratings health-1; flammability-3; reactivity-0

Explosies Limits, Lover: 1.80 vol X Upper: 11.50 vol X

**** SECTION 6 - ACCIDENTAL RELEASE NEASURES ****

General Information: Use proper personal/protective equipment as indicated in Section 8.

Spills/Lenks:

Absirb spill with inert material, (e.g., dry sand or earth), then place into a chemical waste container. Clean up spills immediately, observing precautions in the Protective Equipment section. Use a spark-proof tool.

**** SECTION 7 - HANDLIND and STORAGE ****

Handling

Use only in a well ventilated area, Ground and bond containers when transferring material. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Keep container tightly closed. Avoid contact with heat, sparks and flame. Avoid ingestion and inhalation. Do not

MN

Ľ.

F

12:40

1998,05-20

8608

490

41N

₽°	REQUERTER: BURKHART,	NIKE ACC1446	0 05/2	0/98 PAR 4				
5 P.24/79	pressurize, cut, weld, braze, solder, drill, grind, or expose empty cantainers to heat, sparks or open flames. Storage: Store in a cool, dry, well-ventilated area away from incompatible substances. Flammables-area.							
L/ #	**** SECTIO	A*** SECTION B - EXPOSURE CONTROLS, PERSONAL PROTECTION ****						
14:	Engineering Cont Use adequat concentrati	e general or local	exhaust ventilation ssible exposure lini	to keep airborne ts.				
1		Expesur	e Limits					
0 - N	Chemical Name	ACGIH	NIDSH	DSHA - Final PELS				
998, ø5-2 -	Methyl ethyl ketone	200 ppm ; 590 mg/m3; 300 ppm STEL; 885 mg/m3 STEL	200 ррв ТЫА; 590 вд/тэ ТЫА 3000 ррв IDLH	200 ppm TUA; 590 ng/n3 TUA				
T	OSHA Vacated PEL Hethyl ethy 200 ppm TUA			· · · ·				
	Personal Protect	ive Equipment		•				
490 8098	Gyes Skin	Wear appropriate safety soggles as protection regula	protective eyeglasse described by OSHA's tions in 29 CFR 1910 protective gloves to	eye and facu .133.				
112	Clathing		· · ·					

 \mathbf{O}

١

_

1.1

Wear appropriate protective clothing to prevent skimexposure.

. .

Respirators:

4

FROM : FISHER SCIENTIFIC

Follow the OSHA respirator regulations found in 29CFR 1910.134. Always use a NIOSH-approved respirator when necessary. 05/20/98 PAGE

5

AA#A SECTION Y - PHYSICAL AND CHEMICAL PROPERTIES ####

ACC14460

Physical State: Liguid Not available. Appearance: sweetish odor - alcohol-like Ddor: pHi Not available. Vapor Pressure: 71.2 mm Hg 2.5 (Air=1) Vaper Density 2.7 (Ether=1) Evaporation Rate: Viscosity: 0.42 mPas 15 de Boiling Points BO deg C @ 760.00mm Hg Freezing/Nelling Point: -87 deg C Decomposition Temperature: Not available, Solubility: wiscible with oils Spacific Gravity/Density: .8050g/cm3 Nolecular Formula: CAHBO Nolecular Weight: .72.11

**** SECTION 10 - STABILITY AND REACTIVITY ****

Chemical Stability

Stable at room temperature is closed containers under normal storage and handling conditions, Conditions to Avoid:

Incompatible materials, ignition sources, excess heat. Incompatibilities with Other Materials:

Abines, annonia, caustics, chloroform + alkali, chlorosolfonic acid, copper, hydrogen peroxide + nitric acid, inorganic acids, isocyanates, potassium-1-butoxide, 2-prepanol, pyridines, strong oxidizers, and fuming sulfuric acid. Hazardoos Decomposition Products:

Carbon monoxide, carbon dioxide. Hazardous Polymerization: Has not been reported.

**** SECTION 11 - TOXICOLOGICAL INFORMATION ****

RTECS#:

C45# 78-93-3: EL6475000

L050/LC501

CAS# 78-93-3; Inhalation, mouse; LC50 =40 gm/m3/2H; Inhalation, rat; LC50 =23500 mg/m3/8H; Oral, mouse: L050 = 4050 mg/kg; Dral, rat; L050 = 2737 mg/kg; Skin, rabbit; L050 = 6480 mg/kg; Carcinogenicity

ENTIFI

SCI

: FISHER

FROM

8608

#775

4

Ň

05-20

998.

-

HELNYI ELNYI KELUNE Not listed by ACGIH, IARC, NIDSH, NTP, or OSHA.

ACC14460

Epidemiology No infermation available.

Teratagenicity:

Ebbryo or Fetus: fetotexicity, ihl-rat TCLe=1000 ppm. Specific Developmental Abnormalities: craniofacial and urogenital, ihl-rat

"ICLs=3000 ppm/7H; musculoskeletal, ihl-rat TCLs=1000 ppm,

Reproductive Effects:

No information available.

Neurotoxicity

No information available.

Mutagenicity:

Sex chromosome loss/non-disjunction; S. cerevisiae 33800 ppn. Other Studies

Hane,

**** SECTION 12 - ECOLOGICAL INFORMATION ****

Ecataricity:

Fathead minnow LC50=3220 mg/L/96H 8luegill TLm=5640 to 1690 mg/L/24 to 96H

Environmental Fate:

Substance evaporates in water with T1/2= 3D (rivers) to 12D (lakes). Substance is not expected to bioconcentrate in aquatic organisms. Physical/Chemical:

Substance photodegrades in air with T1/2 = 2.3 days.

Otheri Nane.

**** SECTION 13 - DISPOSAL CONSIDERATIONS ****

Dispose of in a mannen consistent with federal, state, and local regulations. RCRA D-Series Maximum Concentration of Contaminants: CAS# 78-93-3: waste number D035; regulatory level = 200.0 mg/L. RCRA D-Series Chronic Toxicity Reference Levels: CAS# 78-93-3: chronic toxicity reference level = 2 ng/L, RCRA F-Series: None listed. RCRA P-Series: None listed. RCRA U-Series: CAS# 78-93-3: waste number U159 (Ignitable waste; Toxic waste).

CAS# 78-93-3 is banned from land disposal according

ЗŐ

۵

#775

4

Ň

998, 05-20

8608

490

412

: FISHER

FROM

REQUESTER	BURKHART,	NJ KE	ACC14460	05/20/98	PAGF	, 7	
to ADINT					l	•	

**** SECTION 14 - TRANSPORT INFORMATION ****

US DOT

Shipping Name: ETHYL METHYL KETONE Hazard Class: 3 UN Number: 1193 Packing Group: II INO Shipping Name: ETHYL NETHYL KETONE Hazard Classi 3.2 UN Number: 1193 Packing Group: II ΙΑΤΑ Shipping Namer ETHYL METHYL KETONE : Hazard Class: 3 10 UN Number: 1193 Packing Groups II RIO/ADR Shipping Name: ETHYL METHYL KETONE Dangerous Goods Code: 3(38) UN Number: 1193 Canadian TDG Shipping Name: KETHYL ETHYL KETONE Hazard Classi 3 UN Number: UN1193 Other Information: FLASHPOINT -9C

**** SECTION 15 - REGULATORY INFORMATION ****

. .

US FEDERAL

TSCA CAS# 78-93-3 is listed on the TSCA inventory. Health & Safety Reporting List CAS# 78-93-3: Effective Date: October 4, 1982; Sunset Date: October 4, Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule. Section 12b

None of the chemicals are listed under TBCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

SARA

A.

÷

12:42

Section 302 (Re) final RQ = 5000 pounds (2270 kg)

Section 302 (TPO)

None of the chemicals in this product have a TPQ.

ACC14460

SARA Codes CAS # 78-93-3; acute, flanmable,

Section 313

This material contains Hethyl ethyl ketone (CAS# 78-93-3, >99%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

Clean Air Acti

CAS# 78-93-3 is listed as a hazardaus air pollutant (HAP).

This naterial does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors. Clean Nater Acti

None of the chemicals in this product are listed as Hazardous Substances under the CVA.

None of the chemicals in this product are listed as Priority

Pollutants under the CWA.

Hone of the chemicals in this product are listed as Toxic Pollutants under the CWA.

DSHA1

None of the chemicals in this product are considered highly hazardous by OSHA,

STATE

Hethylethylaketone can be found on the following state right to know lists: California, New Jersey, Florida, Pennsylvania, Minnesota, **Hassachusetts**. California No Significant Risk Level:

None of the chemicals in this product are listed.

European/International Regulations

European Labeling in Accordance with EC Directives Hazard Symbols: XI F

Risk Phrases:

R 11 Highly flammable.

R 36/37 Irritating to eyes and respiratory system.

Safety Phrasesi

S-16 Keep away from sources of ignition - No snoking.

S 25 Avoid contact with eyes,

S 33 Take precautionary measures against static

discharges.

S 9 Keep container in a well-ventilated place.

ĝ

Ľ.

775

4

Ň

1998, 05-20

8608

490

412

UR Weter Genger/frotection)

CAS# 78-93-3: 1 Canada

866

8098

490

IENT IFIC

Ω,

MON

CAS# 78-93-3 is listed on Canada's DSL/NDSL List.

This product has a WHMIS classification of 82, D28.

ACC14460 /

CAS# 78-93-3 is not listed on Canada's Ingredient Disclosure List, Exposure Limits

CAS® 78-93-3: OEL-AUSTRALIA:TWA 150 ppn (445 mg/m3);STEL 300 ppm (89 0 mg/m3); DEL-AUSTRIA:TWA 200 ppn (590 mg/m3); DEL-8ELGIUM:TWA 200 ppn (590 mg/m3);STEL 300 ppm (885 mg/m3); DEL-DENMARK:TWA 100 ppm (290 mg /m3);SKin, DEL-FINLAND:TWA 150 ppn (440 mg/m3);STEL 190 ppm;Skin, DEL-FRANCE:TWA 200 ppm (600 mg/m3);SKin, DEL-GERMANY:TWA 200 ppm (590 mg/m 3); DEL-HUNGARY:TWA 200 mg/m3);Stel 600 mg/m3, OEL-INDIA:TWA 200 ppm (5 90 mg/m3);STEL 300 ppm (685 mg/m3), DEL-JAPAN:TWA 200 ppm (550 mg/m3); 70EL-THE NETHERLAND:TWA 200 ppm (590 mg/m3), OEL-THE PHILIPPINES:TWA 200 ppm (S90 mg/m3), DEL-POLAND:TWA 200 mg/m3), OEL-THE PHILIPPINES:TWA 200 ppm (S90 mg/m3), DEL-POLAND:TWA 200 mg/m3); STEL 100 ppm (300 mg /m3), OEL-SWITZERLAND:TWA 200 ppm (550 mg/m3); STEL 100 ppm (300 mg /m3), OEL-SWITZERLAND:TWA 200 ppm (550 mg/m3); STEL 100 ppm (300 mg /m3), OEL-SWITZERLAND:TWA 200 ppm (550 mg/m3); STEL 100 ppm (300 mg /m3), OEL-SWITZERLAND:TWA 200 ppm (550 mg/m3); STEL 100 ppm (300 mg /m3); DEL-SWITZERLAND:TWA 200 ppm (550 mg/m3); STEL 100 ppm (300 mg /m3); DEL-SWITZERLAND:TWA 200 ppm (550 mg/m3); STEL 100 ppm (300 mg /m3); DEL-SWITZERLAND:TWA 200 ppm (500 mg/m3); STEL 100 ppm (300 mg /m3); DEL-SWITZERLAND:TWA 200 ppm (500 mg/m3); STEL 100 ppm (300 mg /m3); DEL-SWITZERLAND:TWA 200 ppm (500 mg/m3); STEL 100 ppm (300 mg /m3); DEL-SWITZERLAND:TWA 200 ppm (500 mg/m3); STEL 100 ppm (300 mg /m3); STEL 300 ppm, DEL IN BULGARTA; COLOHBIA, JORDAN, KOREA check ACGIH TLV? ?OEL 1N NEW ZEALAND; SINGAPORE, VIETNAH check ACBI TLV

**** SECTION 16 - ADDITIONAL INFORMATION ****

KSDS Creation Date: 12/28/1994 Revision #5 Date: 12/12/1997

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or inplied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no way shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsnever arising, even if Fisher has been advised of the possibility of such damages. 7

**** SECTION 14 - TRANSPORT INFORMATION ****

ACC14460

US DOT

ACINH .

Shipping Name: ETHYL METHYL KETONE Hazard Class: 3 UN Numberi 1193 Packing Group: II IND Shipping Name: ETHYL NETHYL KETONE Hazard Class: 3.2 UN Number: 1193 . . . Packing Group: II ΙΑΤΑ Shipping Namer ETHYL METHYL KETONE : Hazard Classi 3 UN Number: 1193 $\sim 10^{-10}$ Packing Groups II RIO/ADR Shipping Name: ETHYL METHYL KETONE Dangerous Goods Code: 3(38) UN Number: 1193 Canadian TDG Shipping Name: KETHYL ETHYL KETONE Hazard Classi 3 UN Number: UN1193 Other Information: FLASHPOINT -9C

**** SECTION 15 - REGULATORY INFORMATION ****

US FEDERAL TSCA

CAS# 78-93-3 is listed on the TSCA inventory.

Health & Safety Reporting List CAS# 78-93-3: Effective Date: October 4, 1982; Sunset Date: October 4, Chemical Test Rules

'None of the chemicals in this product are under a Chemical Test Rule. Section 12b

None of the chemicals are listed under TBCA Section 12b, TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA. SARA

Ň

۱n ¥

Å

12

P.28/79

#775

12:42

· 1998, ØS-20

412 490 8098

FROM : FISHER SCIENTIFIC

....

...

-

٦

.

1

	final RQ = 5000 paunds (2270 kg)
	Section 302 (TPQ)
	None of the chemicals in this product have a TPQ,
•	SARA Codes
	CAS # 78-93-3; acute, flanmable. Section 313
	This material contains Kethyl ethyl ketone (CAS# 78-93-3,)99%),which
	is subject to the reporting requirements of Section 313 of SARA Title
	III and 40 CFR Part 373.
	Cleap Air Acti
	CAS# 78-93-3 is listed as a hazardaus air pollutant (HAP).
	This material does not contain any Class 1 Ozone depletors. This material daes not contain any Class 2 Ozone depletors.
	Clean Water Acti
	None of the chemicals in this product are listed as Hazardous
	Substances under the CVA.
	Hone of the chemicals in this preduct are listed as Priority
	Pollutants under the CWA.
	None of the chemicals in this product are listed as Toxic Pollutants under the CWA.
	None of the chemicals in this product are considered highly hazardous
	by JOSKA , Find Ala Anno 1977 Anno 1977 Anno 1977 Anno 1978 Anno 1978 Anno 1978
STA	
	Hethyl ethyl ketone can be found on the following state right to knov Lists: California, New Jersey, Florida, Pennsylvania, Kinnesota,
	Hassachusetts.
	California No Significant Risk Level:
F	None of the chemicals in this product are listed.
EUI	opean/International Regulations European Labeling in Accordance with EC Directives
	Kazard Symbolst XI F
	Risk Phrases:
	R 11 Highly flammable.
	R 36/37 Irritating to eyes and respiratory system.
	Safety Phrases: 5-16 Keep away from sources of ignition - No
	s south and the southers of the southers of the southers and the southers an
	S 25 Avoid contact with eyes,
	S 33 Take precautionary measures against static
	discharges

discharges. S 9 Keep container in a well-ventilated place.

ACC14460







Use your web browser's "Back" key to return to previous topic.

Tetrachloroethylene

**** MATERIAL SAFETY DATA SHEET ****

Tetrachloroethylene 22900

22900

**** SECTION 1 - CHEMICAL PRODUCT AND COMPANY IDENTIFICATION ****

MSDS Name: Tetrachloroethylene

Catalog Numbers: C182 20, C182 4, C182-20, C182-4, C18220, C1824, O4586 4, O4586-4, O45864 Synonyms: Ethylene tetrachloride; Tetrachlorethylene; Perchloroethylene;

Perchlorethylene Company Identification: Fisher Scientific

1 Reagent Lane Fairlawn, NJ 07410 For information, call: 201-796-7100 Emergency Number: 201-796-7100 For CHEMTREC assistance, call: 800-424-9300 For International CHEMTREC assistance, call: 703-527-3887

**** SECTION 2 - COMPOSITION, INFORMATION ON INGREDIENTS ****

+ CAS#	Chemical Name	+	-++ EINECS#
127-18-4	Tetrachloroethylene	99+	204-825-9

Hazard Symbols: XN N Risk Phrases: 40 51/53

**** SECTION 3 - HAZARDS IDENTIFICATION ****

EMERGENCY OVERVIEW

Appearance: clear, colorless. Caution! Irritant. May cause central nervous system depression. May cause respiratory and digestive tract irritation. May cause liver and kidney damage. May cause severe eye and skin irritation with possible burns. May cause reproductive and fetal effects. May cause cancer based on animal studies. Target Organs: Kidneys, central nervous system, liver. Potential Health Effects Eye: Contact with eyes may cause severe irritation, and possible eye burns. Skin: May cause severe irritation and possible burns. Ingestion: May cause central nervous system depression, kidney damage, and liver damage. Symptoms may include: headache, excitement, fatigue, nausea, vomiting, stupor, and coma. May cause gastrointestinal irritation with nausea, vomiting and diarrhea. Inhalation: Inhalation of vapor may cause respiratory tract irritation. May cause central nervous system effects including vertigo, anxiety, depression, muscle incoordination, and emotional instability. Chronic: Possible cancer hazard based on tests with laboratory animals. Prolonged or repeated skin contact may cause defatting and dermatitis. May cause respiratory tract cancer. May cause adverse nervous system effects including muscle tremors and incoordination. May cause liver and kidney damage. May cause reproductive and fetal effects. **** SECTION 4 - FIRST AID MEASURES **** Eyes: Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower lids. Get medical aid. Skin: Get medical aid if irritation develops or persists. Wash clothing before reuse. Flush skin with plenty of soap and water. Ingestion: If victim is conscious and alert, give 2-4 cupfuls of milk or water. Never give anything by mouth to an unconscious person. Get medical aid. Inhalation: Remove from exposure to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid. Notes to Physician: Treat symptomatically and supportively. **** SECTION 5 - FIRE FIGHTING MEASURES **** General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Containers may explode in the heat of a fire. Vapors may be heavier than air. They can spread along the ground and collect in low or confined areas. Extinguishing Media: Substance is noncombustible; use agent most appropriate to extinguish surrounding fire. For small fires, use dry chemical, carbon dioxide, or water spray. For large fires, use dry chemical, carbon dioxide, alcohol-resistant foam, or water spray. Cool containers with flooding quantities of water until well after fire is out. Autoignition Temperature: Not applicable. Flash Point: Not applicable. NFPA Rating: health-2; flammability-0; reactivity-0 Explosion Limits, Lower: Not available. Upper: Not available. **** SECTION 6 - ACCIDENTAL RELEASE MEASURES ****

**** SECTION 6 - ACCIDENTAL RELEASE MEASURES ****

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks:

Absorb spill with inert material, (e.g., dry sand or earth), then place into a chemical waste container. Avoid runoff into storm sewers and ditches which lead to waterways. Clean up spills immediately, observing precautions in the Protective Equipment section. Flush down the spill with a large amount of water. Remove all sources of ignition. Use a spark-proof tool. Provide ventilation.

**** SECTION 7 - HANDLING and STORAGE ****

Handling:

Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation. Do not reuse this container. Avoid breathing vapors from heated material. Avoid contact with skin and eyes. Keep container tightly closed. Keep away from flames and other sources of high temperatures that may cause material to form vapors or mists.

Storage:

Keep away from heat and flame. Store in a cool, dry place. Keep containers tightly closed.

**** SECTION 8 - EXPOSURE CONTROLS, PERSONAL PROTECTION ****

Engineering Controls:

Use process enclosure, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits.

Exposure Limits

Chemical Name | ACGIH | NIOSH |OSHA - Final PELs| | Tetrachloroethylene25 ppm ; 170|NIOSH Potential|100 ppm TWA; C|| mg/m3; 100 ppm|Occupational| 200 ppm; C 200 | | Carcinogen - see | ppm |STEL; 685 mg/m3 STEL Appendix A; minimize | workplace odo r | exposure |concentrations | limit number of | workers exposed |150 ppm IDLH (not | |considering |carcinogenic | effects)

OSHA Vacated PELs: Tetrachloroethylene: 25 ppm TWA; 170 mg/m3 TWA

Personal Protective Equipment

Eyes:

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133.

Skin:

Wear appropriate protective gloves to prevent skin

exposure. Clothing: Wear appropriate protective clothing to prevent skin exposure. Respirators: A respiratory protection program that meets OSHA's 29 CFR |1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use. **** SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES **** Physical State: Liquid clear, colorless Appearance: sweetish odor Odor: 1 Not available. pH: 15.8 mm Hg Vapor Pressure: 5.2 Vapor Density: 8.0 Evaporation Rate: 9 (ether=100) Viscosity: 0.89 mPa s 20 d 121 deg C Boiling Point: Freezing/Melting Point: -22.3 deg C Decomposition Temperature: 150 deg C Solubility: Nearly insoluble in water. Specific Gravity/Density: 1.623 Molecular Formula: C2C14 Molecular Weight: 165.812 **** SECTION 10 - STABILITY AND REACTIVITY **** Chemical Stability: Stable under normal temperatures and pressures. Conditions to Avoid: Incompatible materials, excess heat. Incompatibilities with Other Materials: Strong bases, metals, liquid oxygen, dinitrogen tetroxide. Hazardous Decomposition Products: Hydrogen chloride, phosgene, carbon monoxide, carbon dioxide. Hazardous Polymerization: Will not occur. **** SECTION 11 - TOXICOLOGICAL INFORMATION **** RTECS#: CAS# 127-18-4: KX3850000 LD50/LC50: CAS# 127-18-4: Inhalation, mouse: LC50 =5200 ppm/4H; Inhalation, rat: LC50 =34200 mg/m3/8H; Oral, mouse: LD50 = 8100 mg/kg; Oral, rat: LD50 = 2629 mg/kg.Carcinogenicity: Tetrachloroethylene -ACGIH: A3-animal carcinogen California: carcinogen - initial date 4/1/88 NIOSH: occupational carcinogen NTP: Suspect carcinogen OSHA: Possible Select carcinogen IARC: Group 2A carcinogen Epidemiology: Epidemiologic studies have given inconsistent results. Studi es have shown that tetrachloroethylene has not caused canc er in exposed workers. The studies have serious weakne sses such as mixed exposures. In tests with rats and mice, i t appeared that tissue destruction or peroxisome prolifera tion rather than genetic mechanisms were the cause of

the observed increases in normally occurring cancers. The oral mouse TDLo that was tumorigenic was 195 gm/kg/50W-I. Teratogenicity: Has caused musculoskeletal abnormalities. Has caused morphological transformation at a dose of 97mol/L in a study using rat embryos. **Reproductive Effects:** Has caused behavioral, biochemical, and metabolic effects on newborn rats when the mother was exposed to the TCLo of 900 ppm/7H at 7-13 days after conception. A dose of 300 ppm/7H 6-15 days after conception caused post-implantation mortality. Neurotoxicity: No information available. Mutagenicity: Not mutagenic in Escherichia coli. No mutagenic effects were seen in rat liver after exposure at 200 ppm for 10 weeks. No chromosome changes were seen in the bone marrow cells of exposed mice. Other Studies: A case of 'obstructive jaundice' in a 6-week old infant has been attributed to tetrachloroethylene in breast milk. **** SECTION 12 - ECOLOGICAL INFORMATION **** Ecotoxicity: Not available. Environmental Fate: In soil, substance will rapidly evaporate. In water, it will evaporate. In air, it can be expected to exist in the vapor phase. Physical/Chemical: Not available. Other: Not available. **** SECTION 13 - DISPOSAL CONSIDERATIONS **** Dispose of in a manner consistent with federal, state, and local regulations. RCRA D-Series Maximum Concentration of Contaminants: CAS# 127-18-4: waste number D039; regulatory level = 0.7 mg/L. RCRA D-Series Chronic Toxicity Reference Levels: CAS# 127-18-4: chronic toxicity reference level = 0.007 mg/L. RCRA F-Series: None listed. RCRA P-Series: None listed. RCRA U-Series: CAS# 127-18-4: waste number U210. CAS# 127-18-4 is banned from land disposal according to RCRA. **** SECTION 14 - TRANSPORT INFORMATION **** US DOT Shipping Name: TETRACHLOROETHYLENE Hazard Class: 6.1 UN Number: UN1897 Packing Group: III IMO No information available. TATA No information available. RID/ADR No information available. Canadian TDG Shipping Name: TETRACHLOROETHYLENE Hazard Class: 6.1

UN Number: UN1897 **** SECTION 15 - REGULATORY INFORMATION **** US FEDERAL TSCA CAS# 127-18-4 is listed on the TSCA inventory. Health & Safety Reporting List CAS# 127-18-4: Effective Date: June 1, 1987; Sunset Date: June 1, 1997 Chemical Test Rules None of the chemicals in this product are under a Chemical Test Rule. Section 12b None of the chemicals are listed under TSCA Section 12b. TSCA Significant New Use Rule None of the chemicals in this material have a SNUR under TSCA. SARA Section 302 (RQ) final RQ = 100 pounds (45.4 kg) Section 302 (TPQ) None of the chemicals in this product have a TPQ. SARA Codes CAS # 127-18-4: acute. Section 313 This material contains Tetrachloroethylene (CAS# 127-18-4, 99+%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373. Clean Air Act: CAS# 127-18-4 is listed as a hazardous air pollutant (HAP). This material does not contain any Class 1 Ozone depletors. This material does not contain any Class 2 Ozone depletors. Clean Water Act: None of the chemicals in this product are listed as Hazardous Substances under the CWA. CAS# 127-18-4 is listed as a Priority Pollutant under the Clean Water Act. CAS# 127-18-4 is listed as a Toxic Pollutant under the Clean Water Act. OSHA: None of the chemicals in this product are considered highly hazardous by OSHA. STATE Tetrachloroethylene can be found on the following state right to know lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts. The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act: WARNING: This product contains Tetrachloroethylene, a chemical known to the state of California to cause cancer. California No Significant Risk Level: CAS# 127-18-4: no significant risk level = 14 ug/day European/International Regulations European Labeling in Accordance with EC Directives Hazard Symbols: XN N Risk Phrases: R 40 Possible risks of irreversible effects. R 51/53 Toxic to aquatic organisms; may cause long-term adverse effects in the aquatic environment. Safety Phrases: S 23 Do not inhale gas/fumes/vapour/spray. S 36/37 Wear suitable protective clothing and gloves. S 61 Avoid release to the environment. Refer to special instructions/Safety data sheets.

WGK (Water Danger/Protection)	
CAS# 127-18-4: 3	·
Canada	
CAS# 127-18-4 is listed on Canada's DSL/NDSL List.	
This product has a WHMIS classification of D1B, D2A.	
CAS# 127-18-4 is not listed on Canada's Ingredient Disclosure List.	
Exposure Limits	
CACH 127.19 A. OFT ADAD Donublic of Examt (TWA 5 nom (25 mg/m2) (Skir	~

CAS# 127-18-4:. OEL-ARAB Republic of Egypt:TWA 5 ppm (35 mg/m3);Skin

A 50 ppm (339 mg/m3);STEL 200 ppm (1368 mg/m3). OEL-CZECHOSLOVAKIA:TWA 250 mg/m3;STEL 1250 mg/m3. OEL-DENMARK:TWA 30 ppm (200 mg/m3);Skin. O EL-FINLAND:TWA 50 ppm (335 mg/m3);STEL 75 ppm (520 mg/m3);Skin. OEL-FR ANCE:TWA 50 ppm (335 mg/m3). OEL-GERMANY:TWA 50 ppm (345 mg/m3);Carcin ogen. OEL-HUNGARY:STEL 50 mg/m3;Skin;Carcinogen. OEL-JAPAN:TWA 50 ppm (340 mg/m3). OEL-THE NETHERLANDS:TWA 35 ppm (240 mg/m3);Skin. OEL-THE PHILIPPINES:TWA 100 ppm (670 mg/m3). OEL-POLAND:TWA 60 mg/m3. OEL-RUSS IA:TWA 50 ppm;STEL 10 mg/m3. OEL-SWEDEN:TWA 10 ppm (70 mg/m3);STEL 25 ppm (170 mg/m3). OEL-SWITZERLAND:TWA 50 ppm (345 mg/m3);STEL 100 ppm;S kin. OEL-THAILAND:TWA 100 ppm;STEL 200 ppm. OEL-UNITED KINGDOM:TWA 50 ppm (335 mg/m3);STEL 15 ppm. OEL IN BULGARIA, COLOMBIA, JORDAN, KOREA check ACGIH TLV. OEL IN NEW ZEALAND, SINGAPORE, VIETNAM check ACGI TLV

**** SECTION 16 - ADDITIONAL INFORMATION ****

MSDS Creation Date: 4/07/1995 Revision #11 Date: 12/12/1997

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no way shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.

	anth-	7.0.00							Polyserizstics	310022279
			by a short	5608 - 00th .					Decompacition Pr	
25	Kerror	25 ref			154 - 100			ersibizo	provie strong	
Ľ			Let way	910474	y mu	1 11		•	-idste	5tability:
	<u></u>	17 L2	-5 440	L <u>/9/</u> 9X	N xa7 ').	- 3804	L	Navjor Solven	REACTIVITY JAR	ECLION AL
ata oxi	9 - 718 Azı	ETT OJ BVDI	naled, rea	i ti "mater. It i	53 unquy SI	iożąoz A:			ja case of eye if necessary, l	IOIA TZAIT
			, beb	iavs și bludi 1:	כמונפר	diethą <u>†</u> :	sedous - direc	sed barablem	as elouid be co	oimenta liñ
							(2)20906 12	sqater neotes	arcinogea(s) ar tiont	Contains c Toxic; irr
							1006	ong no r ataw	OTATAN HITATAN	ECTION Y
				kgå*	ça tatan t	wqer, pr	ry chanted po	t ebixaid n	oques respon buy	datuquitz3
#1917	lendaro 16.	rire Haza	C	195 FIEN	7.4 (13.	1	34257 tquet m	aisinpl-osu#	1.25	aiog desig
						LN	onto for solve	UNALAH NOIR	FIRE AND EXPLO	ECTION IV
							AVM 17060	pţ	spil zestastiga	Appearance
3* *	1999 - 1999 1999 - 1999	a an s Saisteacha	atáuloz : _T	Hater Solubilit	• • •	r:; :	Vapor Bensich	J.Z*SZ i	eure: 100 anily 6	Vapor Pres
				197.0 :YJLERAG			J.8'97 13470	9 GALILON	3789- :3Ai	Nelting Po
			lan si Vi V	se vyn, yr stan					ATAG JADIETA	
				AS quare JMAI - con 111 elfit AM				- ј :вабовто.	iso i quoni filli	- 3
DON12763			CAPCUNDAEN:		1. J 1. B					- V :sapoj
na v Sv i		N/A N/A	¥л	ק/גם מרפז רפל אניג מרפז רפל				al seconda	46 (LCB TS48) opol (aetysuot)	Araciar 12
1920 - A San Ing 19 19 19 19 19 19 19 19 19 19 19 19 19	econt 35 c	N/A N/A	¥л	d/kg aral rat	1 15*200			al seconda	46 {LCB TS48) opot {#4£ysuot)	Araciar 12
11. A 11. 12. 13. 14. 14. 14. 14. 14. 14. 14. 14. 14. 14	etant 28 c 800 bbs 900 bbs 90818 1	0 - 1982 X00 bbw 06979 6ET	#\V \$C1400000 \$1EC2 #	arika oral rat	1 15°200	Lir Ser a	T-45-29000 \$ 573	REDIENLE	48 (PCE L246) (Jonadyae) (do (1995, 895)	ECTION 11 Genevert Arocior 12
11. A 11. 12. 13. 14. 14. 14. 14. 14. 14. 14. 14. 14. 14	etant 28 a M/A 200 bbs M/A	D - 1982 500 bbw 02319 6E1	arv Scitococo Kiecz a	ye'i tan giyan fe'i tan giyan	1 13 ⁺ 400		T-45-29000 \$ 573	#DIENL2 1750101}	48 (PCE L246) (Jonadyae) (do (1995, 895)	Solvent: • Solvent for sic for sic for sic for sic
11. A 11. 12. 13. 14. 14. 14. 14. 14. 14. 14. 14. 14. 14	6reup 28.6	D - 1982 500 bbw 02319 6E1	R\V LC14000000 NIEC2 8	jes (eso Si/b	1 13 ⁺ 400		T-95-29000 6 803 6 803	EDIENLZ sjcouoj } wsw:	Tydaaa) (onedda (Lonadaea) (odo (BUT 2009space) (BUT 2009space) (BUT 2005space)	Cetalog Nu Solventi e Gemponent hethyl alc
い。 5 5 5 5 5 5 5 5 5 5 5 5 5	6reup 28.4	D - 1982 500 bbw 92419 6E1	KUECZ *	jes (eso Si/b	1 13 ⁺ 400	₩ 5 18 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 10 10 10 10 10 10 10 10 10 10 10 10	T-95-29000 6 803 6 803	EDIENL2 sycopoy) Hans: Leicolich	46 (PCE LZ46) 46 (PCE LZ46) 46 (Bethyl 46 (PCC) (Bethyl 86 PCC) 46 PCC 46 PCC 4	ECTION I Component Solvent: Solvent: Solvent: Solvent
E FA COQE byec byec byec byec byec byec byec byec	etang 28 (4/4 200 pp= 17 17 17 17 17 17 17 17 17 17 17 17 17	100 200 ppm 200 ppm	KUECZ *	. JEJ (EJD BY/Au JeJ (EJD BY/Au	1 13 ⁺ 400	₩ 5 18 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 19 10 10 10 10 10 10 10 10 10 10 10 10 10	00077-54-1 523 8521 1248	EDIENL2 sycopoy) Hans: Leicolich	46 (FCE 1246) obol (sethenol) Hrimpolic Incert Bers PP-340 Bers PP-340 PROBUCT Incert 78	ACTION 1 COMPONENT SOLVENT SOLVENT SOLVENT SOLVENT SOLVENT SOLVENT MERCLOF 12 MERCLOF 12 MER
ع ۲۸ (۲۹۹ ۵۷۹۵ ۲۹ (۱۹۹۵) ۲۹ (۱۹۹۵)	6reup 28. 44 200 pp= 200 pp= 2	100 200 ppm 200 ppm	879 501400000 811EC2 8 811EC2 8	. JEJ (EJD BY/Au JeJ (EJD BY/Au	1 13 ⁺ 800	₩	00077-54-1 523 8521 1248	EDIENTS (LAST UP) (FICATION (LAPE: Aller: STAJION	46 (FCE 1246) obol (sethenol) Hrimpolic Incert Bers PP-340 Bers PP-340 PROBUCT Incert 78	Catalog Nu Solvent: • Solvent ECTION 11 Component Menclor 12
9 	ecant 28 c 4/4 300 bb 700 bb 700 bb 700 bb 700 bb 700 bb 700 bb	100 200 ppm 200 ppm	#\V \{C1400000 \{XIEC2 \} \{XIEC2 \} E\S* bb-240	CATALOG NUMB	1 13 ⁺ 800	₩	00073-27-7 5763 # 4160: 03/18/17	EDIENTS (LAST UP) (FICATION (LAPE: Aller: STAJION	46 (FCE 1246) obol (sethenol) Hrimpolic Incert Bers PP-340 Bers PP-340 PROBUCT Incert 78	titis Scientific turis Scientific turis Science Scitch I Scitch I

	6 X	4	8348-6	14	
	2076-188-10h		5608-0	西市 - 七月 。	-
2	Herroris reym.	2	Moysey your		
	miles	4	9.10	A hundred	M al
	hand LZ-Sa		1787	exolv xan	1-180

.

ł

		· · · · · · · · · · · · · · · · · · ·				
		1. s. i				
				•	• .	
		·····				
H	· ·					
	ſ				teved to be correct, but does not pur 1. ULTRA SCIENTIFIC, INC. Shall not 1.	
1	1				uli mi benimit sneeraan beant yd basu	
)			· ·	Bur connexts	SECTION IN SPECIAL PRECAUTI
4	*				Droved safety equipment. Near chemic Mar a rubber apros to prevent contac	
Į.					3209072 ONA BULJUNAH NI NJXAT ;	
) li	1	i bma sili tederol, state and	afterburner and scrubber. Gheer w	ne din incinerator cquipped with an ving disposi.	
					vermiculite or send. myolyed, mpills or li vy de placed in a plastic bag and nor vermiculite or send.	a sittad na
				· · ·	SBURG33	אנדר פא רפאג גאפנדר פא רפאג גאפ
	5		344	CATALOB NUMBER: PP-340	L991 LP041ED: 09/18/1997	B461/12/50 =31W
		33	18 (sector)		entre anté des transmis de la milita de contactions	(401) 294-9460 ULTRA Scientific
3000				V DATA SHEET	rtəfar lainətan	

.

.9					1 V 5	NTERIAL	E Marine a	-1858 12:50	-22- 50
kingstow 250 S	North								107) 501-0100 1189 20140174
		E MINDEB! 66-220	OJATAJ		Lb	VTED, 09/18/19	Man 1847	86	61/ <i>12/</i> 50 = 314
				•			IFICATION	PRODUCT IDENT	ECLEOR I
			•					•	
		-							A 1.
		. C4314							
	2a/pa 2.0	viela V/H - 7ė	. 1810. 61/6s	S6ZT					
rap. 67 c	na 38AI - E 9 aimphils:	empositansa AS qu) ~ H (bauagena II	C - 1MC Ero	tuabou					
							LINEATOS BOJ	PHYSICAL DATA	III MULLOS
	ni i i					J*8.48 (Jnja	eiling Po	3.84- :3=;	a9 paist ok
		uldulos (ysilidu	1972H		111 :	Vapor Density	and the second		n in de la compañía. Na traisteoirtí a compañía de la com
		. , , , , ,	₩1 • ₩	. ,3		•			
13530803	191626n 9)1.	T 1971					_		
•			. f= .##		-				ECTION V
						ct agent(s)	concer suspen	อาการของสาวาร	y 20163003
			•					1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Toxic; 1רר
		, bydided,	g p[mois]>tj	noo le	oizydd f	ardaus - direc	ised berebien	m wd bluede ele	siesta (14
dir – gå	Ne ço ilezy	i inhalad, rem	,193am to sta	nowe s	y cohijon				EIRST AID:
			*						IN NOILC
								şldsje	****
	2 025 2 025 2 025 2 025 2 02 2 00 2 00 2	2 052 2 072 2 072 2 072 2 072 2 073 2 0 2 073 2 073 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	H E E T Rorfe Lingsfor E HUNGER, PP-350 11 compound H - California Prop. 63 c whilitys soluble 12 36.0 Fire Hazard: Combusting 13 36.0 Fire Hazard: combusting 14 California Prop. 63 c 15 36.0 Fire Hazard: combusting 15 36.0 Fire Hazard: combusting 15 36.0 Fire Hazard: combusting 15 36.0 Fire Hazard: combusting 16 27910 17 200 18 200 19 20 19 20 19 20 10	D A T A S H E E T 20 25 20 25 20 25 20 25 20 25 20 26 20 2	ETY DATA SHEET 2005 Rorth Lingston Contactor Number: PP-350 Rorth Lingston Contactor Number: PP-350 Rige 5 - JAMC Group 2A Carthogam; B - IANC Group 2B ca 12,900 mg/kg oral rat PCLA00000 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA00000 200 ppa 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA00000 200 ppa 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA00000 200 ppa 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA00000 200 ppa 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA00000 200 ppa 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA00000 200 ppa 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA00000 200 ppa 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA0000 200 ppa 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA00000 200 ppa 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA0000 200 ppa 200 ppa 200 ppa 200 ppa 200 ppa 200 ppa 200 ppa 12,900 mg/kg oral rat PCLA0000 200 ppa 200 p	5 Α F E T Y D A T A G A F E T 200 70 70 70 70 70 70 70 71 70 71 70 71 70 71 70 71 70 71 70 71 70 71 70 71 71 71 71 71 71 71 71 72 73 74 74 75 76 77 71 71 73 74 74 74 75 76 77 76 76 76 76 76 <tr< td=""><td>TENIAL SAFETY DATA SHEET 230 S 230 S</td><td>NATERIAL SAFETY DATA SAEET NATERIAL SAFETY DATA SAEET North Light Same North Light Same Same North Light Same</td><td>1 Constraints <td< td=""></td<></td></tr<>	TENIAL SAFETY DATA SHEET 230 S 230 S	NATERIAL SAFETY DATA SAEET NATERIAL SAFETY DATA SAEET North Light Same North Light Same Same North Light Same	1 Constraints Constraints <td< td=""></td<>

.

li

T

An estadous Polynerization Products np

- City

an index

A subset

NATERIAL SAFETY DATA SHEET

DATE: 05/27/1998	LAST UPDATED: 09/18/1997	CATALOG NURBER: PP-350	PAGE 2
(401) 294-9400			North Kingstown, RI 01852
WLTRA Scientific			239 Saith Street
Construction construction construction of the second construction of the s	9725555525569 <u>066555566555555556</u> 585755555696	wite 56553 = 523 36 65552322222220036553253	

SECTION VII SPILL OR LEAK PROCEDURES

Spills or leaks: Bue to the small quantity involved, spills or leaks should not pose a significant problem. A leaking appull or bottle may be placed in a plastic bag and normal disposal procedures followed. Liquid samples may be absorbed on vermiculite or wand.

Waste disposal: Burn in a chemical incinerator equipped with an afterburner and scrubber. Observe all faferal, state and local laws concerning disposal.

SECTION VIII PRECAUTIONS TO BE TAKEN IN HANDLING AND STORAGE

Use appropriate OHSA/HSAA approved safety equipment. Noar chemical goggles, face shield, gloves and chemical resistant clothing such as a laboratory coat and/or a rubber aprom to prevent contact with eyes, skin, and clothing. Geep tightly closed and store in a cool dry place.

SECTION II SPECIAL PRECAUTIONS AND CONVENTS

This naterial should only be used by those persons trained in the safe handling of hazardous chemicals.

The above information is believed to be correct, but does not purport to be all inclusive. This data should be used only as a guide in bandling the material. ULTRA SCIENTIFIC, INC. shall not be held liable for any damage regulting from bandling or from contact with the above product.

P.04

BAKER - M-CRESOL, F842

J T.BAKER -- M-CRESOL, F842 MATERIAL SAFETY DATA SHEET NSN: 681000N041610 Manufacturer's CAGE: 70829 Part No. Indicator: A Part Number/Trade Name: M-CRESOL, F842 General Information Company's Name: J T BAKER INC Company's Street: 222 RED SCHOOL LANE Company's City: PHILLIPSBURG Company's State: NJ Company's Country: US Company's Zip Code: 08865-2219 Company's Emerg Ph #: 908-859-2151;800-424-9300(CHEMTREC) Company's Info Ph #: 800-582-2537 Record No. For Safety Entry: 001 Tot Safety Entries This Stk#: 001 Status: SMJ Date MSDS Prepared: 01MAY89 Safety Data Review Date: 28JUL93 MSDS Serial Number: BRLPK Hazard Characteristic Code: NK zwozzanie zwane zach kana kate Ingredients/Identity Information No standard - Angeland - Angela National Standard Proprietary: NO Ingredient: M-CRESOL (SARA III) Ingredient Sequence Number: 01 Percent: 90-100 NIOSH (RTECS) Number: GO6125000 CAS Number: 108-39-4 OSHA PEL: 5 PPM, S ACGIH TLV: N/K (FP N) Physical/Chemical Characteristics Appearance And Odor: COLORLESS TO YELLOW LIQUID. PHENOLIC ODOR. Boiling Point: 395F,202C Melting Point: 53.0F,11.7C Vapor Pressure (MM Hg/70 F): 0.1 (20C) Vapor Density (Air=1): 3.7 Specific Gravity: 1.03 (H*20=1) Evaporation Rate And Ref: N/A Solubility In Water: MODERATE (1-10%) Percent Volatiles By Volume: N/A pH: N/A Fire and Explosion Hazard Data Flash Point: 187F,86C Flash Point Method: CC Lower Explosive Limit: 1.18 Upper Explosive Limit: 1.48 Extinguishing Media: USE WATER SPRAY, CARBON DIOXIDE, DRY CHEMICAL OR ORDINARY FOAM. Special Fire Fighting Proc: USE NIOSH/MSHA APPRVD SCBA AND FULL PROTECTIVE EQUIP (FP N). MOVE CONTRS FROM FIRE AREA IF IT CAN BE DONE W/OUT RISK. USE WATER TO KEEP FIRE-EXPOS CNTRS COOL. Unusual Fire And Expl Hazrds: VAPS MAY FLOW ALONG SURFACES TO DISTANT IGNITION SOURCES & FLASH BACK. CLOSED CONTRS EXPOSED TO HEAT MAY EXPLODE. CONTACT W/STRONG OXIDIZERS MAY CAUSE FIRE.

Reactivity Data الاختاج وجوالا بالجاج والموال والمتحول وموالي والموالي والموالي والموالي والموالي والموالي والموالي و Stability: YES Cond To Avoid (Stability): HEAT, FLAME, OTHER SOURCES OF IGNITION, LIGHT. Materials To Avoid: STRONG OXIDIZING AGENTS. Hazardous Decomp Products: CARBON MONOXIDE AND CARBON DIOXIDE Hazardous Poly Occur: NO Conditions To Avoid (Poly): NOT RELEVANT. Health Hazard Data ____ LD50-LC50 Mixture: LD50: (ORAL, RAT): 242 MG/KG Route Of Entry - Inhalation: YES Route Of Entry - Skin: YES Route Of Entry - Ingestion: NO Health Haz Acute And Chronic: TARGET ORGANS:NASAL SEPTUM, RESP SYS, LIVER, KIDNEYS, EYES, SKIN. ACUTE: INHAL: HDCH, NAUS, VOMIT, DIZZ, DROW, IRRIT OF SEV IRRIT/BURNS. SKIN ABSORPTION: DERM. INGEST: HARMFUL & MAY BE FATAL, NAUS, VOMIT, GI IRRIT, BURNS TO MOUTH (EFTS OF OVEREXP) Carcinogenicity - NTP: NO Carcinogenicity - IARC: NO Carcinogenicity - OSHA: NO Explanation Carcinogenicity: NOT RELEVANT. Signs/Symptoms Of Overexp: HLTH HAZ: & THROAT. CHRONIC EFTS: DAMAGE TO LIVER, KIDNEYS, LUNGS, BLOOD, CENTRAL NERVOUS SYSTEM. Med Cond Aggravated By Exp: NONE IDENTIFIED. Emergency/First Aid Proc: INGEST:CALL MD. IF SWALLOWED, DO NOT INDUCE VOMIT. IF CONSCIOUS GIVE WATER, MILK/MILK OF MAGNESIA. INHAL: REMOVE TO IN CASE OF CNTCT, IMMED FLUSH SKIN W/PLENTY OF WATER (DELUGE SHOWER) FOR @ LEAST 15 MINS WHILE REMOVING CONTAMD CLTHNG & SHOES. WASH CLTHG BEFORE RE-USE. EYES: IMMED FLUSH W/PLENTY OF WATER FOR @ LEAST 15 MINS. Precautions for Safe Handling and Use Steps If Matl Released/Spill: WEAR NIOSH/MSHA APPRVD SCBA & FULL PROT CLTHG. SHUT OFF IGNIT SOURCES; NO FLARES, SMKG/FLAMES IN AREA. STOP LEAK IF CAN DO W/OUT RISK. USE WATER SPRAY TO REDUCE VAPS. TAKE UP W/SAND/OTHER NON-COMBUST ABSORB MATL & PLACE INTO CONTR FOR LATER (SUPDAT)

Neutralizing Agent: J T BAKER SOLUSORB(R) SOLVENT ABSORBENT RECOMMENDED FOR SPILLS OF THIS PRODUCT.

Waste Disposal Method: DISPOSE IN ACCORDANCE WITH ALL APPLICABLE FEDERAL, STATE, AND LOCAL ENVIRONMENTAL REGULATIONS.

Precautions-Handling/Storing: KEEP CONTR TIGHTLY CLOSED. STORE IN COOL, DRY, WELL-VENTILATED, FLAMMABLE LIQUID STORAGE AREA/CABINET. STORE IN LIGHT-RESISTANT CONTAINERS.

Other Precautions: PRODUCT MAY SOLIDIFY AT ROOM TEMPERATURE. KEEP AWAY FROM HEAT, SPARKS, FLAME. HARMFUL IF SWALLOWED, INHALED OR ABSORBED THROUGH SKIN.

Control Measures

Respiratory Protection: NIOSH/MSHA APPRVD RESP PROT REQ IF AIRBORNE CONC EXCEEDS TLV. AT CONCS UP TO 250 PPM, CHEM CARTRIDGE RESP W/ ORGANIC VAP CARTRIDGE & DUST/MIST FILTER IS RECOMMENDED. ABOVE THIS LEVEL, A NIOSH/MSHA APPRVD SCBA IS RECOMMENDED. Ventilation: USE GENERAL OR LOCAL EXHAUST VENTILATION TO MEET TLV REQUIREMENTS. Protective Gloves: RUBBER GLOVES. Eye Protection: CHEM WORK GOGG W/FULL LGTH FSHLD (FP N) Other Protective Equipment: EMER EYE BATH & DELUGE SHOWER (FP N). UNIFORM, PROTECTIVE SUIT RECOMMENDED. Work Hygienic Practices: WASH THOROUGHLY AFTER HANDLING.

.

•

,

I

Suppl.	Safet =====	су & =====	Health	Data:	SPILL			FLUSH		W/WATER.
					Fransp	ortati	on Dat	a =======		
======										
					Dis ======	posal ======	Data ======			
		*****				oel Da	ta			د خری های کر خرار کر خری کی کر کر کر کر کر ک
Label I	cal Re Date:	eview 19AP	Date:	28JUL	93					
Chronic	Name: Haza	M-Card:		F842				•		
	Health	n Haz	GER! ard-Sev evere:		K					
Reactiv	vity H	Hazar	rate: 1 d-Slig	nt: X						
SPARKS SKIN. 2	& FLA ACUTE:	AME. INHA	TARGET L:HDCH	ORGAN NAUS	S:NASA , VOMI	L SEPT F, DIZ	UM, RE Z, DRO	SP SYS, W, IRRI	LIV T OF	AWAY FROM HEAT, ER, KIDNEYS, EYES, UPPER RESP TRACT,
SKIN A	BSORP: BURNS	FION: S TO	DERMAT	. INGE	ST:HAR	MFUL &	MAY B	E FATAI	, NA	EV IRRIT/BURNS. US, VOMIT, GI DNEYS, LUNGS,
Protect		-								
Protect										
Protect			BAKER	TNC						
			2 RED		LANE					
			LIPSBU							
Label S										
			08865-2	2219						
Label (. 207	0 5 0 0 1	51.000	404 0	-		C)
ларет І	merge	ency	Number	: 201-	039-21	21,800	-424-9	300 (CHE	TWI.KE	C)

.											
	REQUEPTER: BURKHA	RT, NIKE	ACC12510 Erial Overty Oata D	(HEET-AM	05/20/98 P	- the second	 			,)
-	Lead 12510					1			·····	•	J
	**** SECT	ION 1 - CHEMI	CAL PRODUCT AND CON	PANY IDE	ENTIFICATIO	N ++++					
~	HSOS Name: Lead Catalog Numbers:	• '									ال
-	671957.6719	57-1, S75257, 46500, L27 1L	580049, L18 500, L B, L27-1LB, L271L8,	18-500, \$719571	L18500, L2 1	46 500,					ال.
-	Company Identific For information.	i Rea Fairl call: 201-79	gent Lane awn, NJ 07410 6-7100								ار
-	Emergency Number: For CHENTREC assi For International	201-79 stance, call: CHEMTREC ass	800-424-9300 Istance, call: 703-								Å.
	**** SE	CTION 2 - COH	POSITION, INFORMATI	ON ON IN	VGREDIENTS	***			•		ز
•	CAS#	•	Chemical Name		X	EINECS		.			-
	7439-92-1	LEAD			99,8	231-100-4			· ·		I.
	•	AAAA SECTION	3 - HAZARDS IDENTI	FICATIO	N ++++						
· •.		一 2011年月 1日 - 報道市市大学	ENERGENCY OVERVIEN								
	absorbed through respiratory and d effects, Causes e	e central ner the skin, Hay ligestive trac ye and skin i	very gray. voos system depress cause kidney damag t irritation. Can c rritation. May caus l nervoos system, b	e. May (ause rej e fetal	cause productive effects.	; s,					. ×
	Potestial Health Eye:	Effects				•					•
·-		eye irritatio	D.								

.

.

#775 P.02/79

12:32

1998, ØS-2Ø

412 490 8098

FROM :FISHER SCIENTIFIC

.

•

•)

Ingestion:

Causes gastrointestinal irritation with nausea, vomiting and diarrhea.

ACC12510

Kany lead compounds can cause texic effects in the blood-forming organs, kidneys, and central nervous system. Hay cause metal taste, muscle pain/weakness, and convulsions.

Inhalation

Nay cause respiratory tract irritation. Inhalation of fumes may cause metal fume fever, which is characterized by flu-like symptoms with metallic taste, fever, chills, cough, weakness, chest pain, muscle pain and increased white blood cell count. May cause effects similar to those described for ingestion.

Chronic:

Chronic exposure to lead may result in plumbism which is characterized by lead line in gum, headache, muscle weakness, mental changes,

**** SECTION 4 - FIRST AID MEASURES ****

Eyest

Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lover lids. Get medical aid.

Skint

Get medical aid. Immediately flush skin with plenty of scap and water for at least 15 minutes while removing contaminated clothing and shoes. Discard contaminated clothing in a manner which limits further exposure.

Ingestioni

If victim is conscious and alert, give 2-4 cupfuls of milk or water. Never give anything by mouth to an unconscious person. Get medical aid immediately. Do NOT induce vomiting. Allow the victim to rinse his nouth and then to drink 2-4 cupfuls of water, and seek medical advice.

Inhalation

Remove from exposure to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician:

Treat symptomatically and supportively.

Antidoter

The use of Dimercaprol or BAL (British Anti-Lewisite) as a chelating

P.03/

#775

12:32

1998, ØS-20

8608

490

412

9

ď.

#775

R

998, 05-20

8608

490

N

4

SCIENT IFIC

: FISHER

FROM

N -

agent should be determined by qualified medical personnel. The use of d-Penicillamine as a chelating agent should be determined by qualified medical personnel. The use of Calcium disodium EDIA as a chelating agent should be determined by qualified medical personnel.

**** SECTION 5 - FIRE FIGHTING MEASURES ****

General Information:

As in any fire, wear a self-contained breathing apparatus in pressure-demand, NSHA/NIOSH (approved or equivalent), and full protective gear, Dust can be an explosion hazard when exposed to heat or flame.

Extinguishing Nedia:

For small fires, use water spray, dry chemical, carbon dioxide or. chemical foam.

Autsignition Temperature: Net available.

Flash Point; Not available.

NFPA Rating: Nat published.

Explosion Limits, Lower: Not available.

Upperi Not available.

A*** SECTION 6 - ACCIDENTAL RELEASE NEASURES ****

General Information: Use proper personal protective equipment as indicated in Section B.

Spills/Leaks:

Vacuum or sweep up material and place into a suitable disposal container. Sweep up, then place into a suitable container for disposal. Avoid generating dusty conditions.

**** SECTION 7 - HANDLING and STORAGE ****

Haidling:

Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation. Avoid contact with eyes, skin, and clothing. Avoid ingestion and inhalation.

Storagei

Store in a cool, dry place. Keep from contact with oxidiring materials.

SECTION B - EXPOSURE CONTROLS, PERSONAL PROTECTION

Engineering Controls:

REQUEFTER: BURKHART, HIKE

Use adequate general or local exhibits vertilation to keep alloorne concentrations below the permissible exposure lipits.

05/20/98 PAGE.

- 4

	Expasi	ure Limitu	
Chemical Name	ACGIH	NIDSH	OSHA - Final PELS
LEAD	0.05 mg/m3	as Pb; 0.100 mg/m3 TWA; see Appendix C for supplementary exposure limits as Pb; 100 mg/m3 IDLH	as Pb: 50 ug/m3 TWA PEL; 30 ug/m 3 actisn level; Poison (see 29 CFR 1910.102 5)

ACC12510

DSNA Vacated PELs: LEAD:

No OSHA Vacated PELs are listed for this chemical.

Personal Protective Equipment

Eyes:

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133.

Skiar

Wear appropriate protective gloves and clothing to prevent skin exposure.

Clathing

Wear appropriate protective clothing to prevent skin exposure.

Respirators:

Follow the OSHA respirator regulations found in 29CFR 1910.134. Always use a NIOSH-approved respirator when necessary.

**** SECTION 9 - PHYSICAL AND CHEHICAL PROPERTIES ****

Physical State:	Solid
Appearances	bluish white, silvery gray
Ddars	None reported
pH1	Not applicable.

FROM

P.05/79

REQUERTER: BURKHART, MIKE

ACC12510

05/20/98 PAGE 5

Vapor rressure: Vapor Density: Evaporation Rate: Viscosity: Boiling Point: Freezing/Helting Point: Decomposition Temperature: Solubility: Specific Gravity/Density:	Not available. Not available. Not applicable. 1740 deg C 327.4 deg C Not available. Insoluble in water. 11.3
Nolecular Formula: Nolecular Verght:	Pb 207.2

**** SECTION 10 - STABILITY AND REACTIVITY ****

Chenical Stability: Stable under normal temperatures and pressures. Conditions to Avoid: . Strong oxidants. Incompatibilities with Other Haterials: Strong exidizing agents. Hazardaus Decomposition Products: Lead/lead bxides. Hazardous Polymerization; Has not been reported.

**** SECTION 11 - TOXICOLOGICAL INFORMATION ****

RTECS#: CAS# 7439-92-1: 0F7525000

L050/LC501 Not available. Carcinogenicity LEAD .

ACBIH; elemental, as Pb; A3 — animal carcinogen California: carcinogen - initial date 10/1/92 OSHA: Possible Select carcinogen IARC: Group 2B carcinogen

Epidemialogy:

There are several reports that certain lead compounds admini stered to animals in high doses are carcinogenic, primarily producing renal tumors. Salts demonstrating carcinogenic ity in animals are usually soluble salts. Epidemiologica 1 studies have not shown a relationship between lead exposur e and the incidence of cancer in lead workers. However,

FROM

P.06/79

ប្រ

2:33

1998,05-20

8608

490

412

6

.

1 .

ane study of read-exposed workers demonstrated a	
statistically significant elevation in the standardized mor	
tality ratio for gastric and lung cancer in battery plan	
t workers only.	
Teratogenicity:	
Lead penetrates the placental barrier and has caused fetal	
abnornalities in animals. Excessive exposure to lead during	
pregnancy has caused neurological disorders in infants.	
Reproductive Effects:	
Reproductive effects from lead have been documented in animals and	
human beings of both sexes. In battery workmen with a mean exposure	
of 8.5 years to lead, there was an increased frequency of spern	
abnormalities as compared with a control group.	
Neurotoxicity:	
Subtle neurologic effects have been demonstrated with relati	
vely low blood levels of lead. The performance of lead wor	
kers on variousneurophysiological tests was mildly redu	
ced when compared with a control group. Anxiety, depre	
ced when compared with a control group, Anxiety, depre ssion, poor concentration, forgetfulness, mild	
reductions in motor and sensory merve conduction velociitie	
s have been documented in lead-exposed workers.	
Hutagenicity is a management of the second	
No data available.	
Other Studies:	
No data available.	

++++ SECTION 12 - ECOLOGICAL INFORMATION ++++

ACC12510

.....

Ecotoricity: Nat available. Environmental Fate: Not available. Physical/Chemical: Not available.


.

Other: Not available.

**** SECTION 13 - DISPOSAL CONSIDERATIONS ****

Dispase of in a manner consistent with federal, state, and local regulations. RCRA D-Series Naximum Concentration of Contaminants: CAS4 7439-92-1: Waste number DOOB; regulatory level = 5.0 ng/L.

.

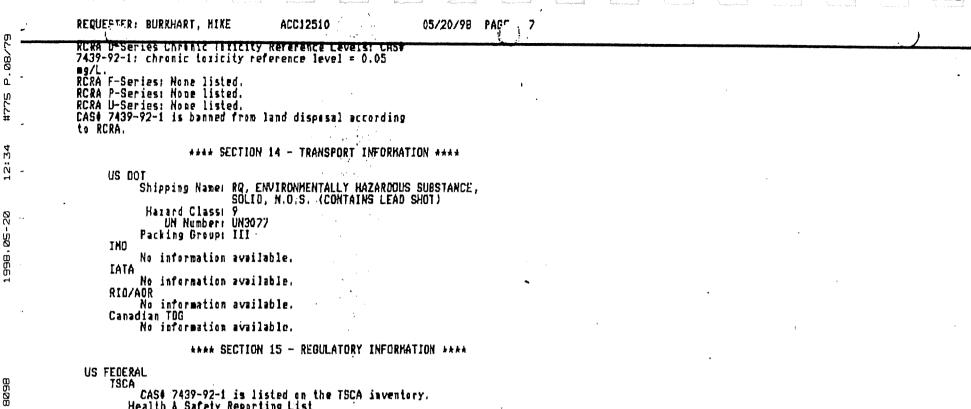

CAS# 7439-92-1 is listed on the TSCA inventory. Health & Safety Reporting List

None of the chemicals are on the Health & Safety Reporting List.

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule. Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule None of the chemicals in this material have a SNUR under TSCA.

SARA

490

412

SCIENTIFIC

: FISHER

FROM

Section 302 (RQ) final RQ = 10 pounds (4.54 kg) Section 302 (TPQ)

40 CFR Part 373. Clean Air Act:

CAS# 7439-92-1 listed as LEAD COMPOUNDS is listed as a hazardous air pollutant (HAP).

This material does not contain any Class 1 Drone depleters.

This material does not contain any Class 2 Grone depletors. Clean Water Act:

None of the chemicals in this product are listed as Hazardous Substances under the CNA.

CAS# 7439-92-1 is listed as a Priority Pollutant under the Clean Water Act.

CAS# 7439-92-1 is listed as a Toxic Pollutant under the Clean Water Act.

OSHAI

None of the chemicals in this product are considered highly hazardous ·by OSHA.

STATE

LEAD can be found on the following state right to know lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.

The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act;

WARNING: This product contains LEAD, a chemical known to the state of California to cause cancer.

WARNING: This product contains LEAD, a chemical known to the state of California to cause birth defects or other reproductive harm.

California No Significant Risk Level

CAS# 7439-92-1: NOEL = 0.5 ug/day

European/International Regulations

European Labeling in Accordance with EC Directives Hazard Symbols: Not available.

Risk Phrases:

Safety Phrasesi

NGK (Water Danger/Protection)

CAS# 7439-92-11

Canada

CAS# 7439-92-1 is listed on Canada's DSL/NDSL List.

FROM

79

#775 P.09/

12:34

1998,05-20

.

CAS# 7439-92-1 is not listed on Canada's Ingredient Disclosure List.

Exposure Limits CAS# 7439-92-1:. OEL-FRANCE:TVA 150 mg/m3. DEL-GERMANY:TVA 0..1 mg/m3? ?DEL-POLAND:TWA 0.05 mg/m3

**** SECTION 16 - ADDITIONAL INFORMATION ****

NSOS Creation Date: 9/28/1995 Revision #16 Date: 12/12/1997

The infermation above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no way shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.

SCIENTIFIC

: FISHER

FROM

50

20,10

Ľ.

#775

12:35

1998, 05-20

APPENDIX C

B

GUIDANCE ON HEAT STRESS CONTROL

<

C&S Engineers, Inc. Health & Safety Guideline #15 Heat Stress Control

4

Ń

Terin (

TABLE OF CONTENTS

1.0	Purpose	1
2.0	Scope	1
3.0	DEFINITIONS	1
4.0	Responsibilities	1
5.0	Guidelines	2
	5.1 Effects of Heat Stress	
	5.2 First Aid/ Medical Treatment	3
	5.3 Heat Stress Prevention	3
	5.4 Heat Stress Monitoring	4
	5.5 Work-Rest Regimen	
	5.6 Biological Monitoring	4
6.0	References	, 5
7.0	ATTACHMENTS	, 5

C&S ENGINEERS, INC. HEAT STRESS CONTROL

1.0 PURPOSE

To establish procedures for the implementation and operation of a heat stress prevention, evaluation, and response program.

2.0 SCOPE

Applies to all activity where employees may be exposed to environments exceeding 71 degrees Fahrenheit (WBGT) performing Levels C and B work, and environments exceeding 77 degrees Fahrenheit (WBGT) for Level D work.

3.0 DEFINITIONS

Acclimatization — Acclimatization is the process of the body becoming accustomed to extremes in temperature.

ACGIH TLV 1997 — Heat Stress Threshold Limit Values (TLVs) are intended to protect workers from the severest effects of heat stress and heat injury and to describe exposures to hot working conditions under which it is believed that nearly all workers can be repeatedly exposed without adverse health effects. The TLV objective is to prevent the deep body core temperature from exceeding $38^{\circ}C$ (100.4°F).

Wet-Bulb Globe Temperature (WBGT) — This is the simplest and most suitable technique to measure the environmental factors associated with heat stress. The value is calculated by using the equations shown in Appendix A.

Work/Rest Regimen — This is a ratio of time spent working versus time spent resting. The ratio applies to one (1) hour periods. For example, a work/rest regiment of 75% work, 25% rest corresponds to 45 minutes work, 15 minutes rest each hour.

4.0 **RESPONSIBILITIES**

Employees — All employees must be alert to signs of development of symptoms of heat stress in themselves and in those working with them. They must also be aware of emergency corrective action.

Health and Safety Coordinator (HSC) — The HSC is responsible for establishing and enforcing the work/rest regimen to control heat stress.

5.0 GUIDELINES

Acclimatization to heat involves a series of physiological and psychological adjustments that occur in an individual during his/her first week of exposure to hot environmental conditions. The work-rest regimen in this procedure is valid for acclimated workers who are physically fit.

5.1 Effects of Heat Stress

Hot weather can cause physical discomfort, loss of efficiency, and personal injury. Wearing personal protective equipment puts a worker at considerable risk of developing heat stress because protective clothing decreases natural body ventilation. Heat stress is probably one of the most common (and potentially serious) illnesses at hazardous waste sites. Regular monitoring and preventive measures are essential to the health and safety of personnel conducting field work.

Early symptoms of heat stress may include fatigue, irritability, anxiety, and decreased concentration, dexterity, or movement. If not recognized or treated, heat stress may be serious, even fatal.

Heat-related problems include:

- 1. **Heat Rash** caused by continuous exposure to hot and humid air and aggravation of the skin by chafing clothes. As well as being a nuisance, this decreases the ability to tolerate heat.
- 2. Heat Cramps caused by profuse perspiration with inadequate fluid intake and chemical replacement (especially salts). Signs: muscle spasm and pain in the extremities and abdomen.
- 3. Heat Exhaustion caused by increased stress on various organs to meet increased demands for body cooling. Signs: shallow breathing; pale, cool, moist skin; profuse sweating; dizziness; fatigue.
- 4. **Heat Stroke** the most severe form of heat stress. Heat stroke is considered an Immediately Dangerous to Life or Health (IDLH) condition and as such must be treated as an emergency. Any person suffering from heat stroke must be cooled down immediately and brought to a hospital. Decontamination procedures should not be implemented. Signs and symptoms are: red, hot, dry skin; no perspiration; nausea; dizziness and confusion; strong, rapid pulse; coma.

It is important to note that individuals vary in their susceptibility and their reactions to heat-related conditions. Factors that may predispose someone to a heat condition include:

- Lack of physical fitness
- Lack of acclimatization
- Age
- Dehydration
- Obesity

- Alcohol and drug use
- Infection
- Sunburn
- Diarrhea
- Chronic disease

5.2 First Aid/Medical Treatment

The following first aid and medical treatments are recommended. First aid training is recommended.

- 1. **Heat Rash** Apply mild drying lotions and use cool, dry sleeping quarters to allow skin to dry between heat exposures.
- 2. **Heat Cramps** Administer commercially-available electrolyte-balanced liquids. Seek medical attention if serious.
- 3. **Heat Exhaustion** Remove to cooler environment; rest in reclining position. Drink plenty of fluids.
- 4. **Heat Stroke** Immediate and rapid cooling by immersion in chilled water with massage, or wrapping in wet sheet and fanning. These steps are to be taken while waiting for emergency response to arrive, or while transporting the victim to an emergency medical facility. This is a **life-threatening** situation.

5.3 Heat Stress Prevention

One or more of the following will help prevent or reduce heat stress:

- 1. Drinking water shall be available to employees to encourage frequent small drinks (i.e., one cup every 15-20 minutes {about 150 ml or 1/4 pint}). The water shall be kept reasonably cool (55-60°F) and shall be placed outside the contaminated areas. Employees shall be encouraged to salt their foods and maintain well-balanced diets. If employees are unacclimatized, a commercially available product such as Gatorade or Exceed may be used for electrolyte replacement.
- 2. Cooling devices may be used to aid natural body ventilation. These devices, however, add weight, and their use should be balanced against worker efficiency.
- 3. Long cotton underwear should be worn. It acts as a wick to help absorb moisture and protect the skin from direct contact with heat-absorbing protective clothing.
- 4. Provide air-conditioned shelter or shaded areas to protect employees during rest periods.
- 5. Install mobile showers and/or hose-down facilities to reduce body temperature and cool protective clothing.
- 6. Conduct operations in the early morning or evening.
- 7. Rotate shifts of workers.
- 8. Add additional employees to work teams.
- 9. Mandate work slowdowns.
- 10. Good hygienic standards must be maintained by frequent change of clothing and daily showering. Clothing should be permitted to dry during rest periods.

- 11. Employees shall be instructed in hot weather procedures. The training program shall include, as a minimum, instruction in:
 - a. Proper cooling procedures and appropriate first aid treatment.
 - b. Proper clothing practices.
 - c. Proper eating and drinking habits.
 - d. Recognition of impending heat exhaustion.
 - e. Recognition of signs and symptoms of impending heat stroke.
 - f. Safe work practices.

5.4 Heat Stress Monitoring

Specific procedures will be established by the HSC and/or in the site specific HASP. Appendices A and B discuss the use of WBGT values.

5.5 Work-Rest Regimen

A work-rest regimen will be established for field work where personnel may be exposed to environments exceeding 77 degrees Fahrenheit (WBGT) for Level D work and environments exceeding 71 degrees Fahrenheit (WBGT) for Levels C and B work. The American Conference of Governmental Industrial Hygienists' TLV Heat Stress Threshold Limit Values will be used as a guideline.

If any heat stress symptoms are identified by the employee or buddy, the HSC should be notified immediately and all work activity should cease until the situation is corrected.

5.6 Biological Monitoring

Always monitor signs and symptoms of heat-stressed employees. When WBGT-TLV criteria are exceeded or water vapor impermeable clothing is worn, discontinue any environmentally-induced or activity-induced heat stress for a person when:

- Sustained heart rate is greater than 160 beats per minute for those under age 35; 140 beats for 35 years of age and older.
- Deep body temperature is more than 100° F.
- Blood pressure falls more than 40 torr in about 3.5 minutes.
- There are complaints of sudden and severe fatigue, nausea, dizziness, lightheadedness, or fainting.
- There are periods of inexplicable irritability, malaise, or flu-like symptoms.
- Sweating stops and the skin becomes hot and dry.
- Daily urinary sodium ion excretion is less than 50 mmoles.

6.0 **References**

Ø.

.

ACGIH TLV Booklet, 1997

7.0 ATTACHMENTS

TABLE 1	_	Permissible Heat Exposure Threshold Limit Values
APPENDIX A	—	Wet-Bulb Globe Temperature Index
APPENDIX B	—	Manual Measurement of WBGT Factors

TABLE 1

PERMISSIBLE HEAT EXPOSURE THRESHOLD LIMIT VALUES

INTENDED CHANGES LISTED

(values are given in °F WBGT)

WORK LOAD

Work-Rest Regimen	Light	Moderate	Heavy
Continuous Work	86	80	77
75% Work 25% Rest, Each Hour	87	82.5	79
50% Work 50% Rest, Each Hour	89	85	82.5
25% Work 75% Rest, Each Hour	89.5	88	86

Water vapor impermeable or thermally insulating clothing, encapsulating suits, and similar convective and evaporative barriers can severely restrict heat loss and produce life-threatening heat strain, even when the ambient air temperature, radiant heat, and humidity are low. Whenever employees wear such restrictive clothing, it is essential that extra caution be exercised. Project managers and supervisors must evaluate heat stress conditions at each job site, taking into account specific job activities, protective clothing being used, and WBGT readings.

APPENDIX A

WET-BULB GLOBE TEMPERATURE INDEX

A baseline work-rest regimen is selected using the WBGT procedure. The WBGT in conjunction with the work load required to perform each task is used to determine work-rest regimen. Light work examples include such tasks as sitting or standing to control machines or performing light hand or arm work. Moderate work includes walking about in coated coveralls and respirators doing moderate lifting and pushing. Heavy work corresponds to pick and shovel-type work or the use of full body protective clothing. *It must be assumed that any activity involving this type of clothing will be considered heavy work.*

In order to determine the WBGT the following equations are used:

I	Outdoors	with	sola	r load:	;				
	WBGT	=	0.7	NWB	+	0.2 GT	+ 0).1]	DB

- Indoors or outdoors with no solar load:
 WBGT = 0.7 NWB + 0.3 GT
 - NWB=Natural Wet-Bulb TemperatureDB=Dry-Bulb TemperatureGT=Globe Thermometer Temperature

The factors involved in the above equations can be measured using a direct reading instrument or manually measuring each factor.

- An example of a direct-reading heat stress monitor is the Reuter-Stokes Wibget No. RSS-214 heat stress monitor.
- Measurement of the individual factors requires the following equipment:
 - ~ Dry-bulb thermometer
 - ~ Natural wet-bulb thermometer
 - ~ Globe thermometer
 - ~ Stand

APPENDIX B

MANUAL MEASUREMENT OF WBGT FACTORS

The range of the dry and the natural wet-bulb thermometers shall be -5° C to 50° C with an accuracy of 0.5° C. The dry-bulb thermometer must be shielded from the sun and the other radiant surfaces of the environment without restricting the airflow around the bulb. The wick of the natural wet-bulb thermometer shall be kept wet with distilled water for at least 1/2 hour before the temperature reading is made. It is not enough to immerse the other end of the wick into a reservoir of distilled water and wait until the whole wick becomes wet by capillary action. The wick shall be wetted by direct application of water from a syringe 1/2 hour before each reading. The wick shall extend over the bulb of the thermometer, covering the stem about one additional bulb length. The wick should always be clean and new wicks shall be washed before using.

A globe thermometer, consisting of a 15 cm (6-inch) diameter hollow copper sphere painted on the outside with a matted black finish or equivalent, shall be used. The bulb or sensor of a thermometer (range -5° C to 100 C with an accuracy of 0.5° C) must be fixed in the center of the sphere. The globe thermometer shall be exposed at least 25 minutes before it is read.

A stand shall be used to suspend the three thermometers so that they do not restrict free airflow around the bulbs.

It is permissible to use any other type of temperature sensor that gives a reading identical to that of a mercury thermometer under the same conditions.

The thermometers must be placed so that the readings are representative of the condition where the employees work or rest, respectively. All readings shall be recorded on the site log.

In many cases WBGT is the simplest and most suitable technique to measure heat. However, this system is only valid for light summer clothing. When special personal protective clothing is required for performing a particular job, the worker's heat tolerance is reduced and the permissible heat exposure limits are not applicable because this clothing is heavier, impedes sweat evaporation, and/or has higher insulation value.

APPENDIX D

GUIDANCE ON SITE COMMUNICATIONS

C&S Engineers, Inc. Health & Safety Guideline #13 Site Communications

No.

TABLE OF CONTENTS

1.0	Purpose	. 1				
2.0	Scope	, 1				
3.0	DEFINITIONS					
4.0	Responsibilities					
5.0	GUIDELINES 5.1 On-Site Communications 5.2 Off-Site Communications	. 1 . 1 . 2				
6.0	References	. 2				
7.0	Attachments	. 2				

C&S ENGINEERS, INC. SITE COMMUNICATIONS

1.0 PURPOSE

This guideline contains information and requirements necessary to make sure field activities are conducted with adequate provision for communications among field personnel and to emergency agencies.

2.0 SCOPE

The guideline applies to all field activities conducted by C&S. Additional provisions for communications will be addressed in each Site-Specific Health and Safety Plan (HASP), as needed. Field communications must be provided not only to make sure field personnel can communicate with one another, but also to contact off-site technical and emergency assistance.

3.0 DEFINITIONS

None

4.0 **Responsibilities**

Employees — All employees are responsible for knowing and using the specified communications to make sure field work is safely completed and/or to respond to emergencies.

Health and Safety Coordinator (HSC) — The HSC is responsible for determining the proper methods of communication required at a particular site; for training site personnel in the use of these communications; and for providing and maintaining the communications as specified.

5.0 GUIDELINES

5.1 **On-Site Communications**

Each person shall be able to communicate with other personnel at all times. This communication may be via sound (air horn), electronic (two-way radio, bullhorn, etc.), or visual means.

A set of hand signals shall be designated and agreed upon by all personnel at each site activity, for use in case electronic communications fail. The site-specific training shall include explanation of the following standard hand signals:

Signal Hand gripping throat

Grip partner's wrist or place both hands around waist

Hands on top of head

Thumbs up

Thumbs down

Meaning Out of air; can't breath

Leave area immediately

Need assistance

OK; I'm all right; I understand No; negative

Whichever communication system is selected as a primary system, a backup system must be provided. For example, hand signals may be used as a backup if radio communications fail. All internal systems should be:

- Clearly understood by all personnel
- Checked and practiced daily
- Intrinsically safe (spark-free)

A special set of emergency signals should be set up. These should be:

- Different from ordinary signals
- Brief and exact
- Limited in number so that they are easily remembered

When designing and practicing communication systems, remember that:

- Background noise on site will interfere with talking and listening
- Wearing personal protective equipment will impede hearing and limit vision (i.e., the ability to recognize hand and body signals)
- Inexperienced radio users may need practice in speaking clearly

5.2 Off-Site Communications

Every field task shall provide for off-site communications to be able to contact local emergency agencies. Acceptable methods include mobile telephone, radio (CB, other) on a frequency monitored by emergency agencies; on-site telephone (portable or land-line); or a phone (booth or private home) within one-mile of the site. Where a private home phone is to be used, personnel shall make sure access to the home is guaranteed by the owner. Explicit directions and a map shall be prominently displayed. Adequate change shall be conveniently provided where a phone booth is specified for off-site communications.

6.0 REFERENCES None

7.0 ATTACHMENTS None

APPENDIX E

GUIDANCE ON EXCAVATION/TRENCHING OPERATIONS

38

C&S Engineers, Inc. Health & Safety Guideline No. 14 Excavation/Trenching Operations

Ŕ

TABLE OF CONTENTS

1.0	PURPOSE	1
	SCOPE	
3.0	DEFINITIONS	1
4.0	RESPONSIBILITY	1
5.0	Guidelines	1
5.	1 HAZARDS ASSOCIATED WITH EXCAVATION/TRENCHING	1
5.	2 PROCEDURES PRIOR TO EXCAVATION	1
	3 PROCEDURES FOR DOING THE EXCAVATION	
5.	4 ENTERING THE EXCAVATION	3
6.0	REFERENCES	3
7.0	ATTACHMENTS	3

C&S ENGINEERS, INC. EXCAVATION/TRENCHING OPERATIONS

1.0 PURPOSE

To establish safe operating procedures for excavation/trenching operations at C&S work sites.

2.0 SCOPE

Applies to all C&S activity where excavation or trenching operations take place.

3.0 **DEFINITIONS**

Excavation — Any manmade cavity or depression in the earth's surface, including its sides, walls, or faces, formed by earth removal and producing unsupported earth conditions by reasons of the excavation.

Trench — A narrow excavation made below the surface of the ground. In general, the depth is greater than the width, but the width of a trench is not greater than 15 feet.

4.0 **RESPONSIBILITY**

Employees — All employees must understand and follow the procedures outlined in this guideline during all excavation and trenching operations.

Health and Safety Coordinator (HSC) — The HSC is responsible for ensuring that these procedures are implemented at each work site.

5.0 GUIDELINES

5.1 Hazards Associated With Excavation/Trenching

The principal hazards associated with excavation/trenching are:

- Suffocation, crushing, or other injury from falling material.
- Damage/failure of installed underground services and consequent hazards.
- Tripping, slipping, or falling.
- Possibility of explosive, flammable, toxic, or oxygen-deficient atmosphere in excavation.

5.2 Procedures Prior to Excavation

- 1. Underground utilities
 - Determine the presence and location of any underground chemical or utility pipes, electrical, telephone, or instrument wire or cables.
 - Identify the location of underground services by stakes or markers.

H&S Guideline No. 14

Rev: 1

- De-energize or isolate underground services during excavation. If not possible, or if location is not definite, method of excavation shall be established to minimize hazards by such means as:
 - 1) Use of hand tools in area of underground services.
 - 2) Insulating personnel and equipment from possible electrical contact.
 - 3) Use of tools or equipment that will reduce possibility of damage to underground services and hazard to worker.
- 2. Identify Excavation Area
 - Areas to be excavated shall be identified and segregated by means of barricades, ropes, and/or signs to prevent access of unauthorized personnel and equipment. Suitable means shall be provided to make barriers visible at all times.
- 3. Surface Water
 - Provide means of diverting surface water from excavation.
- 4. Shoring/ Bracing
 - Shoring or bracing that may be required for installed equipment adjacent to the excavation shall be designed by a competent person.
 - 5. Structural Ramps
 - Structural ramps that are used solely by employees as a means of access to or egress from the excavation shall be designed by a competent person.
- 5.3 Procedures For Doing The Excavation
 - Determine the need for shoring/sloping the type of soil will establish the need for shoring, slope of the excavation, support systems, and equipment to be used. The soil condition may change as the excavation proceeds. Appendices A, B, C, D, E, and F of the OSHA Excavation Regulation, 29 CFR 1926 Subpart P (Attachment 1), are to be used in defining shoring and sloping requirements.
 - 2. Mobile equipment For safe use of mobile industrial equipment in or near the excavation, the load carrying capacity of soil shall be established and suitable protection against collapse of soil provided by the use of mats, barricades, restricting the location of equipment, or shoring.
 - 3. Excavated material (spoil) shall be stored at least two (2) feet from the edge of the excavation.
 - 4. All trench (vertical sides) excavations greater than five (5) feet deep shall be shored.

- 5. Ladders or other means of access to or egress from excavations shall be provided at a maximum spacing of:
 - 1) 100 feet on the perimeter of open excavations, and
 - 2) 25 feet for trench excavations greater than four (4) feet in depth.
- 6. The excavation shall be inspected daily for changes in conditions, including the presence of ground water, change in soil condition, or effects of weather such as rain or freeze. A safe means of continuing the work shall be established based on changes in condition.
- 7. Appropriate monitoring for gas, toxic, or flammable materials will be conducted to establish the need for respiratory equipment, ventilation, or other measures required to continue the excavation safely.
- 8. Adequate means of dewatering the excavation shall be provided as required.
- 9. A signal person shall be provided to direct powered equipment if working in the excavation with other personnel.
- 10. A signal person shall be provided when backfilling excavations to direct powered equipment working in the excavation with other personnel.
- 11. Warning vests will be worn when employees are exposed to public vehicular traffic.
- 12. Employees shall stand away from vehicles being loaded or unloaded, and shall not be permitted underneath loads handled by lifting or dragging equipment.
- 13. Emergency rescue equipment, such as breathing apparatus, a safety harness and line, or a basket stretcher, shall be readily available if hazardous atmospheric conditions exist or may be expected to develop. The specifics will be determined by the HSC/HSM.
- 14. Walkways or bridges with standard guardrail shall be provided where employees or equipment are required or permitted to cross over excavations.

5.4 Entering the Excavation

No C&S Engineers employee shall enter an excavation which fails to meet the requirements of Section 5.3 of this guideline.

6.0 **REFERENCES**

29 CFR 1926, Subpart P - Excavations

7.0 ATTACHMENTS 29 CFR 1926, Subpart P, Appendices A, B, C, D, E, and F

H&S Guideline No. 14

Page 3

APPENDIX F

R

Π

Ĩ

GUIDANCE ON INCIDENT INVESTIGATION AND REPORTING

C&S Engineers, Inc. Health & Safety Guideline #2 Incident Investigation & Reporting

TABLE OF CONTENTS

.

1.0	Purpose	1
2.0	Scope	1
3.0	DEFINITIONS	1
4.0	Responsibilities	2
5.0	GUIDELINES 5.1 Incident Investigation 5.2 Incident Report 5.3 Incident Follow-up Report 5.4 Reporting of Fatalities or Multiple Hospitalization Accidents 5.5 OSHA 200 Summary Form 5.6 OSHA 200S 5.7 Access to OSHA Records	2 3 3 3 3 3 3 3 4
6.0	References	4
7.0	Attachments	4

C&S ENGINEERS, INC. INCIDENT INVESTIGATION AND REPORTING

1.0 PURPOSE

To prevent the occurrence or reoccurrence of accidents on C&S Engineers work sites and to establish a procedure for investigation and reporting of incidents occurring in, or related to C&S Engineers' work activities.

2.0 SCOPE

Applies to all incidents related to C&S Engineers' work activities.

3.0 DEFINITIONS

Accident - An undesired event resulting in personal injury and/or property damage, and/or equipment failure.

Fatality - An injury resulting in death of the individual.

Incident - Any occurrence which results in, or could potentially result in, the need for medical care or property damage. Such incidents shall include lost time accidents or illness, medical treatment cases, unplanned exposure to toxic materials or any other significant occurrence resulting in property damage or in "near misses."

Incidence Rate - the number of injuries, illnesses, or lost workdays related to a common exposure base of 100 full-time workers. The rate is calculated as:

N/EH x 200,000

N = number of injuries and illnesses or lost workday cases; EH = total hours worked by all associates during calendar year. 200,000 = base for 100 full-time equivalent workers (working 40 hours per week, 50 weeks per year).

Injury - An injury such as a cut, fracture, sprain, amputation, etc. which results from a work accident or from a single instantaneous event in the work environment.

Lost Workday Case - A lost workday case occurs when an injured or ill employee experiences days away from work beginning with the next scheduled work day. Lost workday cases do not occur unless the employee is effected beyond the day of injury or onset of illness.

Recordable Illness - An illness that results from the course of employment and must be entered on the OSHA 200 Log and Summary of Occupational Injuries and Illnesses. These illnesses require medical treatment and evaluation of work related injury. For example, dermatitis, bronchitis, irritation of eyes, nose, and throat can result from work and non-work related incidents.

Recordable Injury - An injury that results from the course of employment must be entered on the OSHA 200 Log and Summary of Occupational Injuries and Illnesses(the "OSHA 200 Log"). These injuries require medical treatment; may involve loss of consciousness; may result in restriction of work or motion or transfer to another job; or result in a fatality.

Near Miss - An incident which, if occurring at a different time or in a different personnel or equipment configuration, would have resulted in an incident.

4.0 **RESPONSIBILITIES**

Employees - It shall be the responsibility of all C&S Engineers employees to report all incidents as soon as possible to the HSC, regardless of the severity.

Human Resources - Has overall responsibility for maintaining accident/incident reporting and investigations according to current regulations and recording injuries/ illness on the OSHA 200 Log and Summary of Occupational Injuries and Illnesses and posting the OSHA 200 Log.

Health and Safety Coordinator (HSC) - It is the responsibility of the HSC to investigate and prepare an appropriate report of all accidents, illnesses, and incidents occurring on or related to C&S work.. The HSC shall complete Attachment A within 24 hours of the incident occurrence.

Health and Safety Manager (HSM) - It is the responsibility of the HSM to investigate and prepare an appropriate report of all lost time injuries and illnesses and significant incidents occurring on C&S's property or related to C&S. The HSM shall maintain the OSHA 200 Log.

Project Managers (PM) - It shall be the PM's responsibility to promptly correct any deficiencies in personnel, training, actions, or any site or equipment deficiencies that were determined to cause or contribute to the incident investigated.

5.0 GUIDELINES

5.1 Incident Investigation

The HSC will immediately investigate the circumstances surrounding the incident and will make recommendations to prevent reoccurrence. The HSM shall be immediately notified by telephone if a serious accident/incident occurs. The incident shall be evaluated to determine whether it is OSHA recordable. If the incident is determined to be OSHA 200 recordable, it shall be entered on the OSHA 200 Log.

The following minimum information should be gathered in an accident investigation.

- Where and when the accident occurred
- Who and what were involved, operating personnel and witnesses
- How the accident or illness exposure occurred
- List of objects or substances involved
- The nature of the injury or illness and the part(s) of the body affected
- Discussion of the causes, and recommendations for prevention of recurrence.

5.2 Incident Report

The completed incident report must be completed by the HSC within 24 hours of the incident and distributed to the PM, HSM, and Human Resources. This form shall be maintained by Human Resources for at least five years for all OSHA recordable cases. This form serves as an equivalent to the OSHA 101 Supplementary Record of Occupational Injuries and Illnesses.

5.3 Incident Follow-up Report

The Incident Follow-up Report (Attachment B) shall be distributed with the Incident Report within one week of the incident. Delay in filing this report shall be explained in a brief memorandum.

5.4 Reporting of Fatalities or Multiple Hospitalization Accidents

Fatalities or accidents resulting in the hospitalization of five or more employees must be reported to OSHA verbally or in writing within 48 hours. The report must contain: 1) circumstances surrounding the accident(s); 2) the number of fatalities; and 3) the extent of any injuries.

5.5 OSHA 200 Summary Form

Recordable cases must be entered on the log within six workdays of receipt of the information that a recordable case has occurred. The OSHA log must be kept updated to within 45 calendar days.

OSHA 200 forms must be updated during the 5 year retention period, if there is a change in the extent or outcome of an injury or illness which affects an entry on a log. If a change is necessary, the original entry should be lined out and a corrected entry made on that log. New entries should be made for previously unrecorded cases that are discovered or for cases that initially weren't recorded but were found to be recordable after the end of the year. Log totals should also be modified to reflect these changes.

5.5.1 Posting

The log must be summarized at the end of the calendar year and the summary must be posted from February 1 through March 1.

5.6 OSHA 200S

Facilities selected by the Bureau of Labor Statistics (BLS) to participate in surveys of occupational injuries and illnesses will receive the OSHA 200S. The data from the annual summary on the OSHA 200 Log should be transferred to the OSHA 200S, other requested information provided and the form returned as instructed by the BLS.

5.7 Access to OSHA Records

All OSHA records (accident reporting forms and OSHA 200) shall be available for inspection and copying by authorized federal and state government officials.

Employees, former employees, and their representatives must be given access for inspection and copying to only the log, OSHA 200 Log, for the establishment in which the employee currently works or formerly worked.

6.0 **REFERENCES**

29 CFR Part 1904

7.0 ATTACHMENTS

Attachment A - Incident Investigation Form Attachment B - Incident Follow-up Report Attachment C - Establishing Recordability

ATTACHMENT A INCIDENT INVESTIGATION FORM

Accident investigation should include:

9

Location Time of Day Accident Type Victim Nature of Injury Released Injury Hazardous Material Unsafe Acts Unsafe Conditions Policies, Decisions Personal Factors

ATTACHMENT B

INCIDENT FOLLOW-UP REPORT

Date
Date of Incident:
Site:
Brief description of incident:
Outcome of incident:
Physician's recommendations:
Date the injured employee returned to work:

ATTACH ANY ADDITIONAL INFORMATION TO THIS FORM

.

ATTACHMENT C

ESTABLISHING RECORDABILITY

1. Deciding whether to record a case and how to classify the case.

Determine whether a fatality, injury, or illness is recordable.

A fatality is recordable if it:

results from employment

An injury is recordable if it:

- results from employment and
- requires medical treatment beyond first aid, or
- results in restricted work activity, or
- results in a lost workday

An illness is recordable if it:

results from employment

2. Definition of "Resulting from Employment"

For recordability purposes, "resulting from employment" means the injury or illness results from an event or exposure in the work environment. The work environment is primarily composed of the employer's premises and other locations where employees are engaged in work-related activities or are present as a condition of their employment.

The employer's premises include company rest rooms, hallways, and cafeterias. Injuries occurring in these places are generally considered work-related.

The employer's premises EXCLUDE employer-controlled ball fields, tennis courts, golf courses, parks, swimming pools, gyms, and other similar recreational facilities used by employees on a voluntary basis for their own benefit, primarily during off-work hours.

Company parking facilities are generally not considered part of the employer's premises for OSHA recordkeeping purposes. Therefore, injuries to employee's occurring on these parking lots are not presumed to be work-related, and are not recordable unless the employee was engaged in some work-related activity when he/she was injured.

Employees who travel on company business are considered to be engaged in work-related activities all the time they spend in the interest of the company. This includes travel to and from customer contacts, and entertaining or being entertained for purposes of promoting or discussing business. Incidents occurring during normal living activities (eating, sleeping, recreation) or if the employee deviates from a reasonably direct route of travel are not considered OSHA recordable.

3. Distinction between Medical Treatment and First Aid.

"First aid" means any one-time treatment, and any follow-up visit for the purpose of observation, of minor scratches, cuts, burns, splinters, etc., which do not ordinarily require medical care. Such one time treatment and follow-up visit for the purpose of observation are considered first aid even though provided by a physician or other licensed professional medical care provider.

Injuries are not minor if:

- a) They must be treated only by a physician or other licensed medical personnel;
- b) They impair bodily function (i.e., normal use of senses, limbs, etc.);
- c) They result in damage to physical structure of a nonsuperficial nature (e.g., fractures); or
- d) They involve complications requiring follow-up medical treatment.

APPENDIX - B

Suggested Report Forms

LINDLEY SOUTH CLOSED LANDFILL MONITORING WELL DATA SHEET

B

6

WELL#	DATE	TIME	GROUND ELEV.	TOP OF PVC ELEV	WELL DEPTH	WATER DEPTH	WATER ELEV.
MW-1							
MW-2S							
MW-3							
MW-4							
GW-1							
GW-4							
MW-2D							

LINDLEY SOUTH LANDFILL LANDFILL GAS MONITORING RECORD SHEET DATE:

Gas Vent	%LEL	%O ₂	CO (ppm)	H ₂ S (ppm)	Observations/ Vent Integrity	
Background						
G-1			-			
G-2						
G-3						
G-4		1				ľ
G-5						
G-6						
G-7						J
G-8						
G-9						ľ
G-10						ļ
G-11						
G-12						
G-13						
G-14						
G-15						
		name ^t Mandé en angeles déter				-
Background		····				T

•

Weather Conditions:

LINDLEY SOUTH LANDFILL - STEUBEN COUNTY POST-CLOSURE FIELD INSPECTION REPORT FORM

DATE: INSPECTOR:

Entrance Driveway & Service Road Conditions	good	fair	poor	
Culverts	good	fair	poor	
Trespass Sign Conditions	good	fair	poor	<u> </u>
Fence/Gate Conditions	good	fair	poor	locked
Drainage Channels	clear	sediment	plugged	
Perimeter Drains	clear	sediment	plugged	<u> </u>
Evidence of Trespass	yes	no		
Evidence of Vehicle Use	yes	no		······································

		no	where	
Jncovered Areas	yes	no	where	
/egetative Cover Conditions	good	fair	poor	
Evidence of Vectors	yes	no	where	
Evidence of Erosion	yes	no	where	
Evidence of Ponded Water	yes	no	where	
Evidence of Leachate Seepage	yes	no	where	
Dther				

Gas Vents	secure	damaged	
Monitoring Wells/Piezometer	secure	damaged	
Surface Water Monitoring Locations	flowing	blocked	

Į.

COMMENTS

CORRECTIVE MEASURES



L____

Fire Prevention Control & Countermeasure Program Fire Investigation Report

Location of Fire	
Date Fire Occurred	Time
Material Involved	
What Work Was Being Perf	formed When Fire Occurred
What Happened	
Employees Involved	Others Involved
Environmental Damage?	o Control The Fire And Prevent Personal Injury Or
The Fire Occurred?	cedures And Safety Requirements Being Followed WhenIf Not, Explain
	outed to Cause This Incident
Recommendations To Preve	ent a Recurrence or Similar Fire
Investigated By	Date

Spill Prevention Control & Countermeasure Program Spill Investigation Report

Ţ

44

Location of Spill		<u> </u>
Date Spill Occurred	Time	
Material Involved		
What Work Was Being P	Performed When Spill Occurred	
What Happened	·	
Employees Involved	Others Involved	
	To Control The Spill And Prevent Personal Injury Or	
Were Proper Operating I	Procedures And Safety Requirements Being Followed When If Not, Explain	
What Other Factors Cont	tributed to Cause This Incident	
Recommendations To Pr	event a Recurrence or Similar Spill	
Investigated By	Date	

•

Personal Injury or Property Damage Investigation Report

Location	
Date Occurred	_ Time
Material/Equipment Involved _	
What Work Was Being Perforr	ned
What Happened	
Employees Involved	Others Involved
	event Environmental Damage
	ures And Safety Requirements Being Followed When
The Accident Occurred?	_ If Not, Explain
What Other Factors Contribute	ed to Cause This Incident
Recommendations To Prevent	a Recurrence or Similar Incident
Investigated By	Date

T

Fire Prevention Control & Countermeasure Program Emergency Organization Drill Report

Date Drill Held Scheduled Time
Location of Drill
Objective of Drill
Structure of Drill
Response Time Duration of Drill
Number of Participants Scheduled
Names of Participants Leader
Evaluation of Drill
Response Time
Objective Met
Elapsed Time to Achieve Goal
Attitude of
Participants
Suggestions for Improvement of Future Drills
Report Prepared By
Date Prepared
,

•

APPENDIX	PAGE	OF	
GROUNDWATER SAMPLING LOG SHEET			Ч
DATE			
LOCATION ACTIVITY START END			1
ID FIELD QC DATA: I FIELD DUPLICATE COLLECTED DUP ID	•• 3	-	0
WATER LEVEL / WELL DATA			,
	ELL DIFF.	FT	I I
WELL DEPTH TOP OF DEFINE WELL DIA. 2 INCH WELL INTEGRIT WELL DIA. 2 INCH WELL INTEGRIT 4 INCH PROT. CASING DEPTH TO FT WELL DEPTH 6 INCH CONCRETE COLL WATER FT WELL DEPTH 0 THER:	SECURE		
HEIGHT OF16 GAL/FT (Z IN) GAL/VOL ANBIENT AIR VO/		PPM	
WATER COLUMN FT X 4.65 GAL/FT (4 IN)= 1.5 GAL/FT (6 IN) GAL/FT (_IN) WELL MOUTH		ррн	ļ
	SAMPLE OBS	ERVATIONS	
PURGE VOLUME QGAL QGAL QGAL QGAL QGAL			ų
TEMP, DEG C			
DH, UNITS			Ļ
SPECIFIC CONDUCTIVITY unhos/ca			
	OTHER (SEE NOTES)	ĥ
EQUIPMENT DOCUMENTATION PURGING SAMPLING EQUIPMENT ID PERISTALTIC PUMP ISCO # SUBMERSIBLE PUMP KECK # BAILER I2" I1" # PVC/SILICON TUBING POTABLE VATER AIR LIFT NONE WATERRA IN-LINE FILTER PRESS/VAC FILTER GED	3E 3E		
ANALYTICAL PARAMETERS METHOD FILTERED PRESERVATION VOLUME SAMPLE SAMPLE BOTTLE MUMBER METHOD REQUIRED COLLECTED	ID NUMBERS		
NOTES			
SIGNATURE:			

	SURF	FACE WATER/AIR S	SAMPLING LO	G SHEET_	
SAMPLER (pr	rint):				
SAMPLER (si	gnature):				

		ļ			
1. Surface Rui	noff Water Sam	pling		•	
Sample Location Number	Sample Time	pН	Temp.	Physica	al Observations
_	• • • • • • • • • • • • • • • • • • •				
		<u></u>	<u></u>		
2. Ambient Air Wind D	Sampling				
Sample Location Number	Sample Time	Upwind (U) or Downwind (D)	10.2 eV Lamp Reading (ppm)	11.7 eV Lamp Reading ⁻ (ppm)	Comments
			······································		

.	· · · · · · · · · · · · · · · · · · ·				
 		······································		<u></u>	
		<u></u>			
-					
					-

P

Ď

Ú

Ĩ


•

Chain of Custody Record


.

Phone #		i	Telefax #	<u> </u>			Contact Person:		Project #:				
Client:		:	Phone #	e de la companya de l				s					
Addreas:			Telefax	<u>#</u>			4			Client's Si	te I.D.;		
	Client's Sa		ization:						100	Client's Pr stainers	oject I.D.:		- I m
Sample Number	Identificat	ions	Date	Sample Time	grab	rpe comp.	MECTIX	Added	*	size/type	Analyse		Preserv Check
				· ·		, 				· · · · · · · · · · · · · · · · · · ·			
											· · · · ·		
												•	
			T								nnnn an tha an		
									1				
and the second									1				
												<u></u>	
****	_								┢╴				
		;									anan-manananan katalan anan ana ana ana ana ana ana ana an		
Notes and Hazard 1	dentification	18:					Casto	y Transt	era				0
				Contain Bent B Contain	71		*******			t e :		Date	Time
				Receiv		1				and the second statement of the second statement of the second statement of the second statement of the second			_
•		1 		Sample	d By:				Rec	ceived By;	naula a succession da da ana sa ka mana		
•				Reling	uishe	Вуі		a di sa	Rei	ceived By:	n an		
b 1		,		Reling	uishe	By:		Receive	d Éc	or Lab By:	anna an an an 10 anna 11 anna 11 an		

(*************************************			
- -		Project : Client:	
Weil ID	Sampled for:	Routine	Baseline Other
Diameter		Cap: outside	inside
Well Depth	i Static Water	Well Locked	yes no
H2O Column	Level Type of V		
Conversion Wel Volume		Standpipe	Flush Mount
# of Volumes to Evacuate			
Ant. to Evac.	Well Volume	Date/Time Evacuated	d:
Evacuated Bottom Type:		Date/Time Sampled: Date/Time VOC's Sa	mpled:
Hard Soft _	Before Sa	Field Rea	Atter Sampling
Semi-hard Semi-soft	Religio Date	3	Date Time
Weather Conditions:	ch Temp	-	eh Temp
	рн		pH
Sampled by: Print	Cond. Turb.		Cond. Turb.
Gunnents:	D.O.		D.O.
	Appearance	28	Арреагалсе

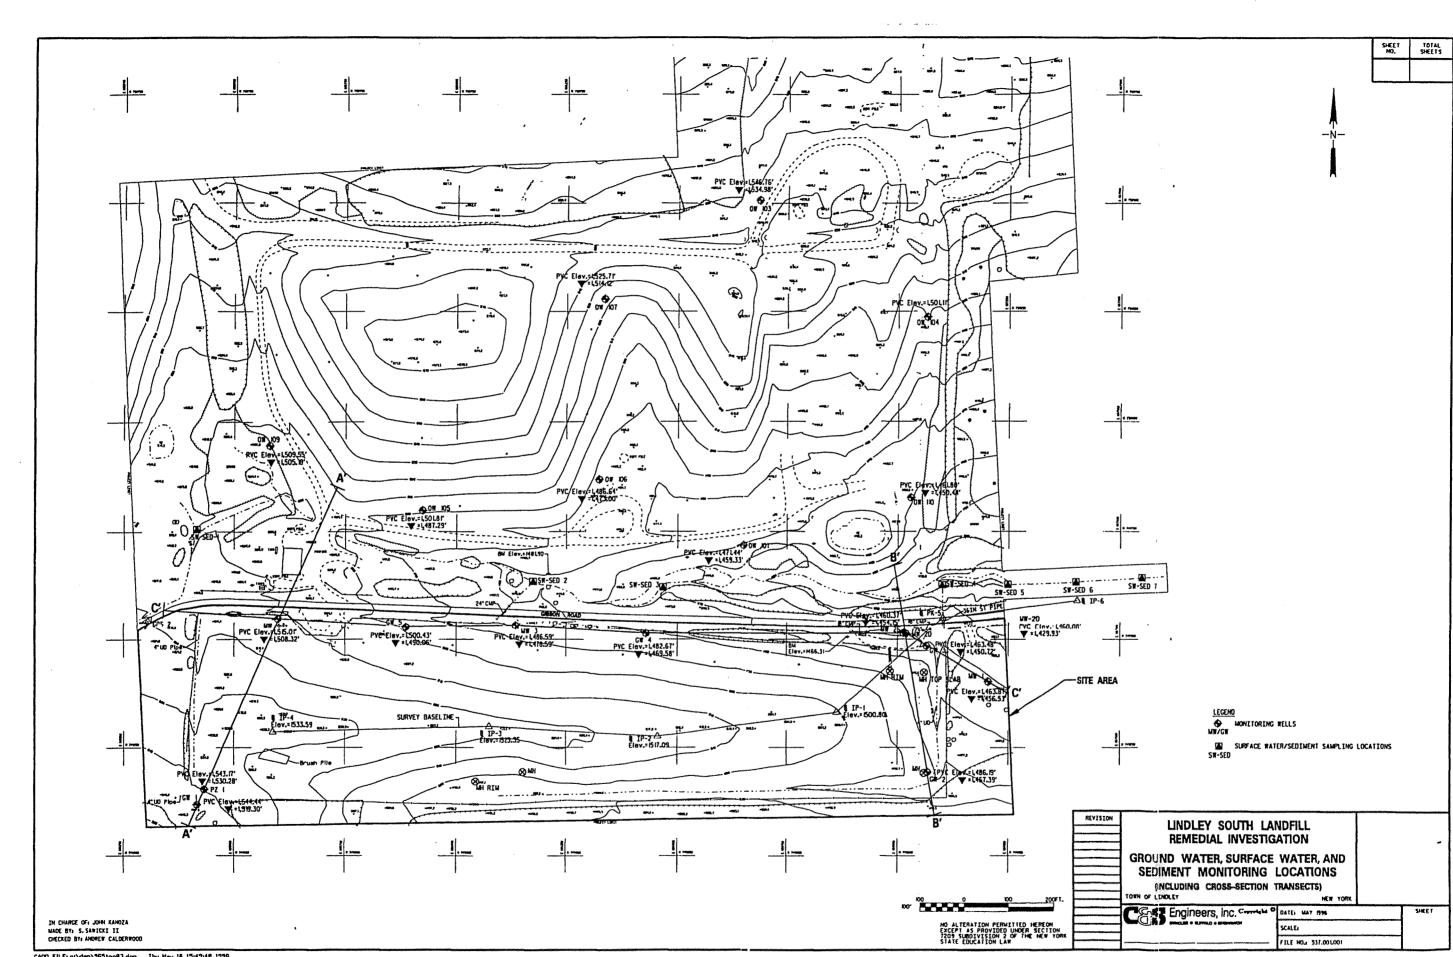

CADD FILEI alldan 165 10093.dgn Thu Hay 16 15149148 1998



ì

•

1

í

ł

. . . . v

VUI MAINU

ORPTestr[~]

Microprocessor Based Packel Size ORP Tester

BEFORE FIRST USE: Remove plastic strips between batteries and contacts if present (see lvox side panels). Do not be alarmed if white crystals form around the cap. They are normalized will discolve during CONDMING.

CALTION: TO ANDRE CREES CONTAMBIATION RETWEEN SAMPLES, NEVER DURENSK THE ELECTROPE ADDVE THE CHADE RANT!

CONDITIONING: Believe first use, remove cap and rinse the electrode in water to dissolve any crystals and activate the electrode.

CAUBRATION: Calibration is not necessary unless exact readout agreement with a work standard and at a specific ORP value is needed. To achieve this, use the following procedure: Select a solution sample from the actual process as near the critical ORP value as possible. Dip the electrode from the work standard and the conditioned ORPTestr into this solution for 2 to 5 minutes until the readings stabilize. Note the reading of the standard.


standard. Press the ORPTestr CAUCON button, Display will flash "CA", then the ORP reading. If work standard reading is higher, press the HOLDINC button until the display reads the same value as the work standard. If work standard reads lower, continue pressing the HOLDINC button until the value displayed scrolls around to the standard, is write, Press CAUCON. "CO" is displayed and offset adjustment is complete. This offset adjustment defaults to factory calibration when batteries are removed/replaced.

- ORP TESTING • Renkive cap. Press ON/OFF batton to turn tat.
 - * Dip the electrode 1/2" to 1" into test solution and stir once.
- * Allow the reading to stabilize 2 to 5 min.
- Press "wan" burnon if you wish to hold the reading ("Ho" will be displayed momentarily). Press it again to release it ("He" will be displayed momentarily).
- · Press the ON/OFF button to shut off.
- " THERE IS AN AUTOMATIC SHUT-OFF AFTER \$5 MUNUTES TO CONSERVE RATTERIES!

CHANGING BATTERIES: Flip up battery compartment lid (see box side panels). Replace batteries with fresh ones noting polarity as shown in battery compartment.

SPECIFICATIONS

Resolution	5 mV
Accuracy	±S mV repeatability
Offset Adjust.	±150 mV-brings ORP into agreement
	with your work standard.
Operating Temp.	32 to 122°F. 0 to 50°C.
Battery/Life	3pcs. 1.4V Eveready EP675HP/ 100 hrs
	(Silver Oxide battery may be substituted;
	use model 303. Typical life=70 hrs.)
Welled Materiak	
	thermoplastic polyester
Size (meter enty)	5.9"L x 1.65"W x 0.94"11
	3.25 az (92 gm)
SEE SIDE PANE	FOR ETROR MESSAGE EXPLANATIONS

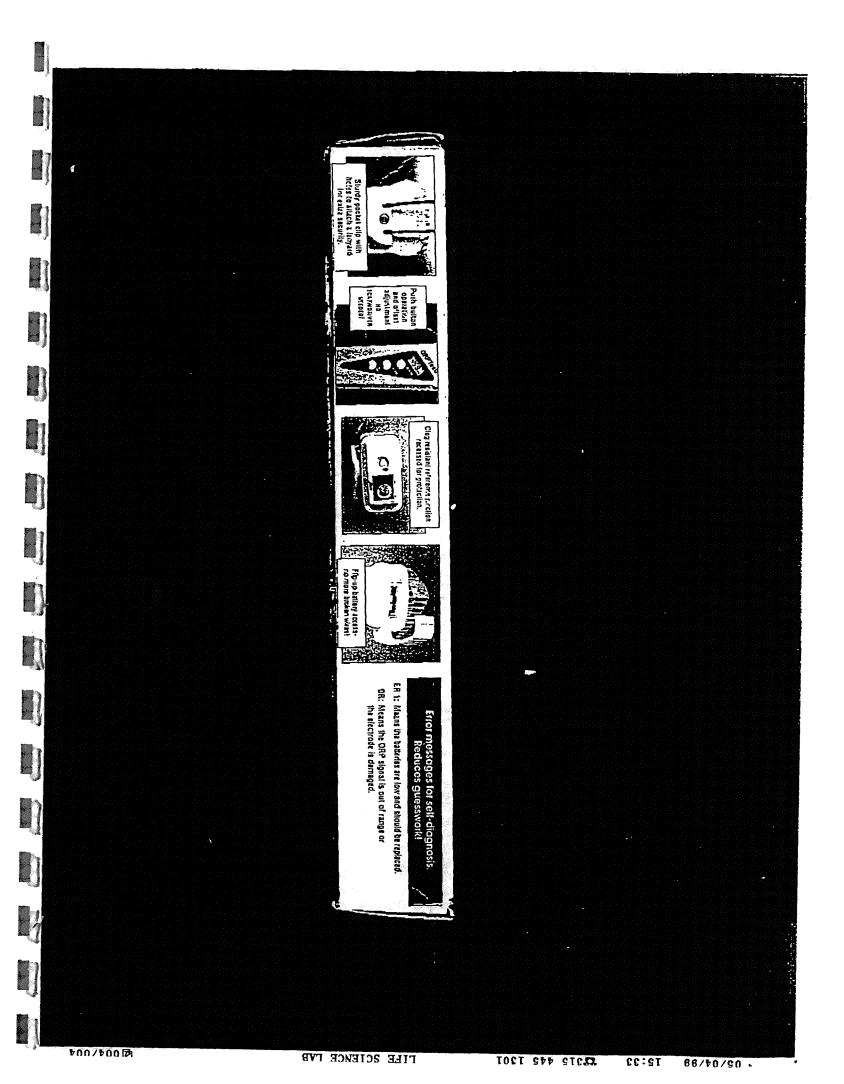

APPENDIX - C

Sampling, Preservation, and Holding Time Criteria

ENVIRONMENTAL LABORATORY APPROVAL PROGRAM · CERTIFICATION MANUAL

SUBJECT		DATE	PAGE	ITEM NO.		
Sample Collection: Requisitor for Environmental Analys		11/3/97	1 of 7	242		
ANALYTE	CONTAINE	<u>ER PRE</u>	SERVATION	MAXIMUM <u>HOLDING TIME</u>		
Bacteriological Tests:	•					
Coliform, Total and Fecal	P,G	Coo	I, 4℃	6 hours		
Coliform, Total and Fecal in chlorinated samples	P,G		I 4ºC, 0.008% S₂O₃	6 hours		
Standard Plate Counts	P,G		14°C, 0.008%	6 hours		
Inorganic Tests:		Ndzi	S₂O₃			
Acidity	P,G	com the	arate bottle pletely filled to exclusion of Cool, 4°C	14 days o		
Alkalinity	P,G	com the	arate bottle pletely filled to exclusion of Cool, 4°C	14 days		
Ammonia	P,G		I, 4°C, H₂SO₄ H<2	28 days		
Biochemical oxygen demand	P,G	Coo	l, 4°C	48 hours		
Bromide	P.G	Non	e	28 days		
Biochemical oxygen demand, carbonaceous	P,G	Coo	l, 4°C	48 hours		
Chemical oxygen demand	P,G		I, 4°C, H₂SO₄ H<2	28 days		
Chloride	P ,G	Non	e	28 days		
Color	P,G	Coo	l, 4°C	48 hours		

I,

Í

ſ

٠

₩003/008 .

. •

MAXIMUM

ENVIRONMENTAL LABORATORY APPROVAL PROGRAM CERTIFICATION MANUAL

SUBJECT	DATE	PAGE	ITEM NO.
Sample Collection: Requirements for Environmental Analyses/Water	11/1/95	2 of 7	242

.

ANALYTE	<u>CONTAINER</u>	PRESERVATION	HOLDING TIME
Cyanide, total and amenable to chlorination	P,G	Cool, 4°C, NaOH to pH>12, 0.6g ascorbic acid	14 days
Fluoride	Р	None	28 days
Hardness	P,G .	HNO₃ to pH<2 H₂SO₄ to pH<2	6 months
Hydrogen ion (pH)	P,G	None	Analyze immediately
Kjeldahl and organic nitrogen	P,G	Cool, 4°C, H ₂ SO ₄ to pH<2	28 days
Metals, except boron, chromium VI and mercury	P,G	HNO₃ to pH<2	6 months
Boron	P, Quartz	HNO ₃ to pH<2	6 months
Chromium VI	P,G	Cool, 4°C	24 hours
Mercury	P,G	HNO ₃ to pH<2	28 days
Nitrate -	P,G	Cool, 4°C	48 hours
Nitrate-nitrite	P,G	Cool, 4°C, H ₂ SO ₄ to pH<2	28 days
Nitrite	P,G	Cool, 4°C	48 hours
Oil and Grease	G	Cool, 4°C, Hcl or H₂SO₄ to pH<2	28 days
Organic carbon	P.G	Cool, 4° C, Hcl or H ₃ PO ₄ , or H ₂ SO ₄ to pH<2	28 days
Orthophosphate	P,G	Filter immediately, Cool, 4°C	48 hours

Q

Ĩ I

1

Π

Ĩ

۰ ــ

- ENVIRONMENTAL LABORATORY APPROVAL PROGRAM CERTIFICATION MANUAL

SUBJECT	DATE	PAGE	
Sample Collection: Requirements for Environmental Analyses/Water	11/1/95	3 of 7	242

MAXIMUM

ANALYTE	CONTAINER	PRESERVATION	HOLDING
Phenols	G	Cool, 4°C H₂SO₄ to pH<2	28 days
Phosphorus (elemental)	G	Cool, 4°C	48 hours
Phosphorus, total	P,G	Cool, 4°C, H ₂ SO, to pH<2	28 days
Residue, Total	P,G	Cool, 4°C	7 days
Residue, Filterable	P,G	Cool, 4°C	7 days
Residue, Nonfilterable	P,G	Cool, 4°C	7 days
Residue, Volatile	P,G	Cool, 4°C	7 days
Silica	P, Quartz	Cool. 4°C	28 days
Specific Conductance	P,G	Cool, 4°C	28 days
Sulfate	P,G	Cool, 4°C	28 days
Sulfide	P,G	Cool, 4°C, add zinc acetate plus sodium hydroxide to pH>9	7 days
Surfactants	P,G	Cool, 4°C	48 hours
Temperature	P,G	None	Analyze Immediately
Organic Tests:			
Purgeable Halocarbons plus Benzyl Chloride and	G, Teflon- lined septum	Cool, 4°C, Ascorbic Acid (25	14 days

l.

Epichlorohydrin

Ascorbic Acid (25 mg/40 ml) for residual chlorine

- ENVIRONMENTAL LABORATORY APPROVAL PROGRAM CERTIFICATION MANUAL

163 V V U / V V U

.

MAXIMUM

Į.

P

Ę.

F

Í

SUBJECT	DATE	PAGE	
Sample Collection: Requirements for Environmental Analyses/Water	6/1/95	4 of 7	242

ANALYTE	CONTAINER	PRESERVATION	HOLDING
Purgeable Aromatics	G, Teflon- lined septum	Cool, 4° C, 0.008% Na ₂ S ₂ O ₃ for residual chlorine	14 days
		Preserve as above and HCI to pH<2	14 days
Acrolein and Acrylonitrile	G, Teflon- lined septum	Cool, 4°C, 0.008% Na ₂ S ₂ O ₃ for residual chlorine	14 days for acrylonitrile, 3 days for acrolein
		Preserve as above and pH to 4-5	14 days
Phenols	G, Teflon- lined cap	Cool, 4°C, 0.008% Na ₂ S ₂ O ₃ for residual chlorine	7 days until extraction 40 days after extraction
Benzidines	G, Teflon- lined cap	Cool, 4°C, 0.008% Na ₂ S ₂ O ₃ for residual chlorine	7 days until extraction 7 days after extraction if stored under inert gas
Phthalate Esters	G, Teflon- lined cap	Cool, 4°C	7 days until extraction 40 days after extraction

ENVIRONMENTAL LABORATORY APPROVAL PROGRAM **CERTIFICATION MANUAL**

SUBJECT	DATE	PAGE	ITEM NO.
Sample Collection: Requirements for Environmental Analyses/Water	6/1/95	5 of 7	242

ANALYTE	CONTAINER	PRESERVATION	HOLDING
Nitrosamines	G, Teflon- lined cap	Cool, 4°C, store in dark, 0.008% Na ₂ S ₂ O ₃ for residual chlorine. For diphenylnitros- amine add 0.008% Na ₂ S ₂ O ₃ and adjust pH 7-10 with NaOH within 24 hours of sampling	7 days until extraction 40 days after extraction
Nitroaromatics and Isophorone	G, Teflon- lined cap	Cool, 4°C, 0.008% Na ₂ S ₂ O ₃ for residual chlorine, store in dark	7 days until extraction 40 days after extraction
PCBs	G, Teflon- lined cap	Cool, 4°C	7 days until extraction 40 days after extraction
Pesticides	G, Teflon- lined cap	Cool, 4°C	72 hours
		Cool, 4°C, pH 5-9, 0.008% $Na_2S_2O_3$ for residual chlorine if aldrin is to be determined	7 days until extraction 40 days after extraction
Polynuclear Aromatic Hydrocarbons	G, Teflon- lined cap	Cool, 4°C, 0.08% Na ₂ S ₂ O ₃ for residual chlorine only, store in dark	7 days until extraction 40 days after extraction

MAXIMUM

ENVIRONMENTAL LABORATORY APPROVAL PROGRAM CERTIFICATION MANUAL

-- ----

--

aej v 0 f / V V U

MAXIMUM

P

22

-

SUBJECT	DATE	PAGE	ITEM NO.
Sample Collection: Requirements for Environmental Analyses/Water	6/1/95	6 of 7	242

ANALYTE	CONTAINER	PRESERVATION	HOLDING
Haloethers	G, Teflon- lined cap	Cool, 4°C, 0.008% $Na_2S_2O_3$ for residual chlorine only	7 days until extraction 40 days after extraction
Chlorinated Hydrocarbons	G, Teflon- lined cap	Cool, 4°C	7 days until extraction 40 days after extraction
2,3,7,8-Tetrachlorodi- benzo-p-Dioxin	G, Teflon- lined cap	Cool, 4°C, 0.008% Na ₂ S ₂ O ₃ for residual chlorine only	7 days until extraction 40 days after extraction
Radiological Tests:			
Gross Alpha	P,G	HCL or HNO3 to pH<2	6 months
Gross Beta	P,G	HCL or HNO3 to pH<2	6 months
Strontium-89	P,G	HCL or HNO ₃ to pH<2	6 months
Strontium-90	P,G	HCL or HNO ₃ to pH<2	6 months
Radium-226	P,G	HCL or HNO ₃ to pH<2	6 months
Radium-228	P,G	HCL or HNO ₃ to pH<2	6 months
Radon-222	glass with teflon-lined septum	Cool, 4°C	4 days

ENVIRONMENTAL LABORATORY APPROVAL PROGRAM CERTIFICATION MANUAL

SUBJECT	DATE	PAGE	ITEM NO.
Sample Collection: Requirements for Environmental Analyses/Water	6/1/95	7 of 7	242

...

j

ANALYTE	CONTAINER	PRESERVATION	MAXIMUM HOLDING <u>TIME</u>
Radioactive Cesium	P,G	HCL to pH<2	6 months
lodine-131	P,G	None	7 days
Tritium	G	None	6 months
Uranium	P,G	HCL or HNO ₃ to pH<2	6 months
Photon Emitters	P,G	HCL or HNO3 to pH<2	6 months
Microscopical Tests:			
Asbestos	P	Cool to 4°C	48 hours
		20 mg/l Hg as HgCl₂	6 months

Lindley South Landfill - RI/FS Groundwater Monitoring Well GW-4 Field Duplicate Comparison

·		<u> </u>	Dupe	%RPD
Parameter	Units	GW-4	GW-4	
alpha -BHC	ug/l	< 0.05	< 0.05	NA
beta-BHC	ug/1	< 0.05	< 0.05	NA
delta-BHC	ug/1	< 0.05	< 0.05	NA
gamma-BHC(Lindane)	ug/l	< 0.05	< 0.05	NA
Heptachlor	ug/l	< 0.05	< 0.05	NA
Aldrin	ug/l	< 0.05	< 0.05	NA
Heptachlor epoxide	ug/l	< 0.05	< 0.05	NA
Endosulfan I	ug/l	< 0.05	< 0.05	NA
Dieldrin	ug/l	<0.10	<0.10	NA
4,4' -DDE	ug/l	<0.10	<0.10	NA
Endrin	ug/l	<0.10	<0.10	NA
Endosulfan II	ug/l	<0.10	<0.10	NA
4,4'-DDD	ug/l	< 0.10	< 0.10	NA
Endosulfan Sulfate	ug/l	<0.10	< 0.10	NA
4,4'-DDT	ug/l	<0.10	< 0.10	NA
Methoxychlor	ug/l	< 0.50	< 0.50	NA
Endrin Ketone	ug/l	< 0.10	<0.10	NA
Endrin Aldehyde	ug/l	<0.10	< 0.10	NA
alpha-chlordane	ug/l	< 0.05	< 0.05	NA
gamma-chlordane	ug/l	< 0.05	< 0.05	NA
Toxaphene	ug/l	<5.0	<5.0	NA
Aroclor 1016	ug/l	<1.0	<1.0	NA
Aroclor 1221	ug/l	<2.0	<2.0	NA
Aroclor 1232	ug/l	<1.0	<1.0	NA
Aroclor 1242	ug/l	<1.0	<1.0	NA
Aroclor 1248	ug/l	<1.0	<1.0	NA
Aroclor 1254	ug/l	<1.0	<1.0	NA
Aroclor 1260	ug/l	<1.0	<1.0	NA

Laboratory Duplicate Results GW-4

. .

	Sample	Duplicate	RPD
Parameter	Concentration	Concentration	,
Units	ug/l	ug/l	
Aluminum	31450	30940	1,6
Antimony	<29	<29	NA
Arsenic	23.3	13.7	51.9
Barium	319.1	312.5	2.1
Beryllium	3.049	3.049	0.0
Cadmium	<2	<2	NA
Calcium	282900	282800	0.0
Chromium	44.99	48.06	6.6
Cobalt	45.16	43.56	3.6
Copper	96.51	92.72	4.0
Iron	82850	82400	0.5
Lead	112	48.6	79.0
Magnesium	105600	104800	0.8
Manganese	5157	5150	0.1
Mercury	0.2	0.2	0.0
Nickel	85.58	85.12	0.5
Potassium	5370	4714	13.0
Selenium	<14	<2.8	NA
Silver	<5.6	<5.6	NA
Sodium	99150	90680	8.9
Thallium	<4	<4	NA
Vanadium	12.42	11.76	5.5
Zinc	222.8	221.6	0.5
Boron			NA

NA - Cannot perform a relative percent difference on values which are below method detection limits.

.

Table C. Lindley South Landfill RI/FSPCB/Pesticide CompoundsResidential Well Water Samples

Ŕ

Î

İ.

Parameter	Units	RW-1	RW-2
Date Received	····	12/16/95	12/16/95
Date Extracted		12/18/95	12/18/95
Date Analyzed		12/28/95	12/28/95
alpha -BHC	ug/i	< 0.05	< 0.05
beta-BHC	ug/l	< 0.05	< 0.05
delta-BHC	ug/l	< 0.05	< 0.05
gamma-BHC(Lindane)	ug/l	< 0.05	< 0.05
Heptachlor	ug/l	< 0.05	< 0.05
Aldrin	ug/l	< 0.05	< 0.05
Heptachlor epoxide	ug/l	< 0.05	< 0.05
Endosulfan I	ug/l	< 0.05	< 0.05
Dieldrin	ug/l	< 0.10	< 0.10
4,4' -DDE	ug/l	< 0.10	< 0.10
Endrin	ug/l	< 0.10	< 0.10
Endosulfan II	ug/l	< 0.10	< 0.10
4,4'-DDD	ug/l	< 0.10	< 0.10
Endosulfan Sulfate	ug/l	< 0.10	< 0.10
4,4'-DDT	ug/l	< 0.10	< 0.10
Methoxychlor	ug/l	< 0.50	< 0.50
Endrin Ketone	ug/l	< 0.10	< 0.10
Endrin Aldehyde	ug/l	< 0.10	< 0.10
alpha-chlordane	ug/l	< 0.05	< 0.05
gamma-chlordane	ug/l	< 0.05	< 0.05
Toxaphene	ug/l	<5.0	<5.0
Aroclor 1016	ug/l	<1.0	<1.0
Aroclor 1221	ug/l	<2.0	<2.0
Aroclor 1232	ug/l	<1.0	<1.0
Aroclor 1242	ug/l	<1.0	<1.0
Aroclor 1248	ug/l	<1.0	<1.0
Aroclor 1254	ug/l	<1.0	<1.0
Aroclor 1260	ug/l	<1.0	<1.0

Table D. Lindley South Landfill RI/FSInorganic ParametersResidential Well Water Samples

		Class GA	DIN 4	DIVA
Parameter	Units	Standard/Guidance	<u>RW-1</u>	<u>RW-2</u>
Hardness	mg CaCO3/1		9	<5
Total Cyanide	ug/l	100	<10	<10
Aluminum	ug/l		<80.9	<80.9
Antimony	ug/l	3	<29.0	57.5
Arsenic	ug/l	25	<6.5	<6.5
Barium	ug/l	1000	25	<3.9
Beryllium	ug/l	3	< 0.90	< 0.90
Cadmium	ug/l	10	<2.0	<2.0
Calcium	ug/1		2460	688
Chromium	ug/l	50	<5.3	<5.3
Cobalt	ug/1		<11.3	<11.3
Copper	ug/l	200	13.1	15.6
Iron	ug/l	300	62.3	24.1
Lead	ug/l	25	<2.1	<2.1
Magnesium	ug/l	35000	731	<312
Manganese	ug/l	300	4.5	<2.9
Mercury	ug/l	2	0.2	0.2
Nickel	ug/l		<14.3	< 14.3
Potassium	ug/l		<456	<456 ·,
Selenium	ug/l	10	<2.8	<2.8
Silver	ug/l	50	<5.6	< 5.6
Sodium	ug/l	20000	245000	257000
Thallium	ug/l	4	<4.0	<4.0
Vanadium	ug/l		<8.2	<8.2
Zinc	ug/l	300	15.8	12.6
Boron	ug/l	1000	NR	NR

Table A. Lindley South Landfill RI/FSVolatile Organic AnalysisTrip Blank Samples

Parameter	Units	Trip Blank SDG-1	Trip Blank SDG-2
Date Received		12/16/95	12/16/95
Date Analyzed		12/22/95	12/22/95
Chloromethane	ug/l	<10	<10
Bromomethane	ug/l	<10	<10
Vinyl Chloride	ug/l	<10	<10
Chloroethane	ug/l	<10	<10
Methylene Chloride	ug/1	<10	<10
Acetone	ug/l	<10	<10
Carbon Disulfide	ug/l	<10	<10
1,1-Dichloroethene	ug/l	<10	<10
1,1-Dichloroethane	ug/l	<10	<10
1,2-Dichloroethene - trans	ug/l	<10	<10
Chloroform	ug/l	<10	<10
1,2-Dichloroethane	ug/l	<10	<10
2-Butanone	ug/l	<10	<10
1,1,1-Trichloroethane	ug/l	<10	<10
Carbon Tetrachloride	ug/l	<10	<10
Bromodichloromethane	ug/1	<10	<10
1,2-Dichloropropane	ug/l	<10	<10
cis-1,3-Dichloropropene	ug/l	<10	<10
Trichloroethene	ug/l	<10	<10
Dibromochloromethane	ug/l	<10	<10
1,1,2-Trichloroethane	ug/l	<10	<10
Benzene	ug/1	<10	<10
trans-1,3-Dichloropropene	ug/l	<10	<10
Bromoform	ug/l	<10	< 10
4-Methyl-2-Pentanone	ug/l	<10	<10
2-Hexanone	ug/l	<10	<10
Tetrachloroethane	ug/1	<10	<10
1,1,2,2-Tetrachloroethane	ug/l	<10	<10
Toluene	ug/l	<10	<10
Chlorobenzene	ug/l	<10	<10
Ethylbenzene	ug/l	<10	<10
Styrene	ug/l	<10	<10
Xylenes (Total)	ug/l	<10	<10
1,2-Dichloroethene-cis	ug/1	<10	<10
Number of TICS* Identified		0	0

* - Tentatively Identified Compounds

Í

		T	dupe	%RPD
Parameter	Units	SED-3	SED-3	
Aluminum	mg/kg	6260	3830	24.08
Antimony	mg/kg	<8.8	<9.2	NA
Arsenic	mg/kg	5.7	5.9	1.72
Barium	mg/kg	68.5	38.3	28.28
Beryllium	mg/kg	0.45	< 0.29	NA
Cadmium	mg/kg	< 0.64	< 0.67	NA
Calcium	mg/kg	1870	1390	14.72
Chromium	mg/kg	9.4	7.3	12.57
Cobalt	mg/kg	7.6	5	20.63
Copper	mg/kg	8.1	9.1	5.81
Iron	mg/kg	14800	9320	22.72
Lead	mg/kg	31.2	1.8	89.09
Magnesium	mg/kg	2040	1340	20.71
Manganese	mg/kg	851	176	65.73
Mercury	mg/kg	< 0.15	< 0.16	NA
Nickel	mg/kg	14.7	10.7	15.75
Potassium	mg/kg	229	<145	NA
Selenium	mg/kg	< 0.85	< 0.89	NA
Silver	mg/kg	<1.7	<1.8	NA
Sodium	mg/kg	248	221	5.76
Thallium	mg/kg	<1.2	6.9	NA
Vanadium	mg/kg	3.9	3	13.04
Zinc	mg/kg	65.8	46.9	16.77
Total Cyanide	mg/kg	<1.5	<1.6	NA

Ż

			dupe	%RPD
Parameter	Units	SED-3	SED-3	
Chloromethane	ug/kg	<15	<16	NA
Bromomethane	ug/kg	<15	<16	NA
Vinyl Chloride	ug/kg	<15	<16	NA
Chloroethane	ug/kg	<15	<16	NA
Methylene Chloride	ug/kg	7 (J)	9 (J)	12.5
Acetone	ug/kg	36	<16	NA
Carbon Disulfide	ug/kg	<15	<16	NA
1,1-Dichloroethene	ug/kg	<15	<16	NA
1,1-Dichloroethane	ug/kg	<15	<16	NA
1,2-Dichloroethene - trans	ug/kg	<15	<16	NA
Chloroform	ug/kg	<15	<16	NA
1,2-Dichloroethane	ug/kg	<15	<16	NA
2-Butanone	ug/kg	<15	<16	NA
1,1,1-Trichloroethane	ug/kg	<15	<16	NA
Carbon Tetrachloride	ug/kg	<15	<16	NA
Bromodichloromethane	ug/kg	<15	<16	NA
1,2-Dichloropropane	ug/kg	<15	<16	NA
cis-1,3-Dichloropropene	ug/kg	<15	<16	NA
Trichloroethene	ug/kg	<15	<16	NA
Dibromochloromethane	ug/kg	<15	<16	NA
1,1,2-Trichloroethane	ug/kg	<15	<16	NA
Benzene	ug/kg	<15	<16	NA
trans-1,3-Dichloropropene	ug/kg	<15	<16	NA
Bromoform	ug/kg	<15	<16	NA
4-Methyl-2-Pentanone	ug/kg	<15	<16	NA
2-Hexanone	ug/kg	<15	<16	NA
Tetrachloroethane	ug/kg	<15	<16	NA
1,1,2,2-Tetrachloroethane	ug/kg	<15	<16	NA
Toluene	ug/kg	<15	<16	NA
Chlorobenzene	ug/kg	<15	<16	NA
Ethylbenzene	ug/kg	<15	<16	NA
Styrene	ug/kg	<15	<16	NA
Xylenes (Total)	ug/kg	<15	<16	NA
1,2-Dichloroethene-cis	ug/kg	<15	<16	NA

F

		T	dupe	%RPD
Parameter	Units	SED-3	SED-3	
Phenol	ug/kg	<510	<530	NA
bis(2-chloroethyl)ether	ug/kg	<510	<530	NA
2-chlorophenol	ug/kg	<510	<530	NA
1,3-Dichlorobenzene	ug/kg	<510	<530	NA
1,4-Dichlorobenzene	ug/kg	<510	100 (J)	NA
1,2-Dichlorobenzene	ug/kg	<510	<530	NA
2-methylphenol	ug/kg	<510	<530	NA
2,2-oxybis(1-chloropropane)	ug/kg	<510	<530	NA
4-methylphenol	ug/kg	<510	<530	NA
N-nitroso-di-n-proplyamine	ug/kg	<510	<530	NA
hexachloroethane	ug/kg	<510	<530	NA
nitrobenzene	ug/kg	<510	<530	NA
isophorone	ug/kg	<510	<530	NA
2-nitrophenol	ug/kg	<510	<530	NA
2,4-Dimethylphenol	ug/kg	<510	<530	NA
bis(2-chloroethoxy)methane	ug/kg	<510	<530	NA
2,4-dichlorophenol	ug/kg	<510	<530	NA
1,2,4-trichlorobenzene	ug/kg	<510	<530	NA
naphthalene	ug/kg	<510	<530	NA
4-chloroaniline	ug/kg	<510	<530	NA
hexachlorobutadiene	ug/kg	<510	<530	NA
4-chloro-3-methylphenol	ug/kg	<510	<530	NA
2-methylnaphthalene	ug/kg	<510	<530	NA
Hexachlorocyclopentadiene	ug/kg	<510	<530	NA
2,4,6-trichlorophenol	ug/kg	<510	<530	NA
2,4,5-trichlorophenol	ug/kg	<1300	<1300	NA
2-chloronaphthalene	ug/kg	<510	<530	NA
2-nitroaniline	ug/kg	<1300	<1300	NA
dimethyl phthalate	ug/kg	<510	<530	NA
acenaphthylene	ug/kg	<510	<530	NA
2,6-dinitrotoluene	ug/kg	<510	<530	NA
3-nitroaniline	ug/kg	<1300	<1300	NA
acenaphthene	ug/kg	<510	<530	NA

4

Í

ŧ

			dupe	%RPD
Parameter	Units	SED-3	SED-3	
2,4-dinitrophenol	ug/kg	<1300	<1300	NA
4-nitrophenol	ug/kg	<1300	<1300	NA
dibenzofuran	ug/kg	<510	<530	NA
2,4-dinitrotoluene	ug/kg	<510	<530	NA
diethylphthalate	ug/kg	<510	<530	NA
4-chlorophenyl-phenylether	ug/kg	<510	<530	NA
fluorene	ug/kg	<510	<530	NA
4-nitroaniline	ug/kg	<1300	<1300	NA
4,6-dinitro-2-methylphenol	ug/kg	<1300	<1300	NA
N-Nitrosodiphenylamine	ug/kg	<510	<530	NA
4-bromophenyl-phenylether	ug/kg	<510	<530	NA
hexachlorobenzene	ug/kg	<510	<530	NA
pentachlorophenol	ug/kg	<1300	<1300	NA
phenanthrene	ug/kg	34 (J)	<530	NA
anthracene	ug/kg	<510	<530	NA
carbozole	ug/kg	<510	<530	NA
Di-n-butylphthalate	ug/kg	<510	<530	NA
Fluoranthene	ug/kg	<510	<530	NA
pyrene	ug/kg	<510	<530	NA
butylbenzylphthalate	ug/kg	<510	<530	NA
3,3-dichlorobenzidine	ug/kg	<510	<530	NA
benzo(a)anthracene	ug/kg	<510	<530	NA
chrysene	ug/kg	<510	<530	NA
bis(2-ethylhexyl)phthalate	ug/kg	210 (Л)	150 (Ј)	16.67
Di-n-octyl phthalate	ug/kg	<510	<530	NA
benzo(b)fluoranthene	ug/kg	<510	<530	NA

. .

· · · · · · · · · · · · · · · · · · ·			dupe	%RPD
Parameter	Units	SED-3	SED-3	
benzo(k)fluoranthene	ug/kg	<510	<530	NA
benzo(a)pyrene	ug/kg	<510	<530	NA
Indeno(1,2,3-cd)pyrene	ug/kg	<510	<530	NA
dibenzo(a,h)anthracene	ug/kg	<510	<530	NA
benzo(g,h,i)perylene	ug/kg	<510	<530	NA
alpha -BHC	ug/kg	<2.5	<2.6	NA
beta-BHC	ug/kg	<2.5	<2.6	NA
delta-BHC	ug/kg	<2.5	<2.6	NA
gamma-BHC(Lindane)	ug/kg	<2.5	<2.6	NA
Heptachlor	ug/kg	<2.5	<2.6	NA
Aldrin	ug/kg	<2.5	<2.6	NA
Heptachlor epoxide	ug/kg	<2.5	<2.6	NA
Endosulfan I	ug/kg	<2.5	<2.6	NA
Dieldrin	ug/kg	0.13 (J)	0.14 (J)	3.70
4,4' -DDE	ug/kg	0.19 (Л)	0.22 (J)	7.32
Endrin	ug/kg	<5.1	<5.3	NA
Endosulfan II	ug/kg	<5.1	<5.3	NA
4,4'-DDD	ug/kg	<5.1	<5.3	NA
Endosulfan Sulfate	ug/kg	0.17 (J)	0.17 (J)	0.00
4,4'-DDT	ug/kg	<5.1	0.23 (J)	NA
Methoxychlor	ug/kg	<25	26	NA
Endrin Ketone	ug/kg	<5.1	< 5.3	NA
Endrin Aldehyde	ug/kg	<5.1	<5.3	NA
alpha-chlordane	ug/kg	<2.5	0.22 (J)	NA
gamma-chlordane	ug/kg	<2.5	<2.6	NA
Toxaphene	ug/kg	<250	<260	NA
Aroclor 1016	ug/kg	<51	<53	NA
Aroclor 1221	ug/kg	<100	<110	NA
Aroclor 1232	ug/kg	<51	<53	NA
Aroclor 1242	ug/kg	<51	<53	NA
Aroclor 1248	ug/kg	<51	<53	NA
Aroclor 1254	ug/kg	<51	<53	NA
Aroclor 1260	ug/kg	<51	<53	NA

NA - Cannot perform a relative percent difference on values who are below method detection limits

Page 5 of 5

Laboratory Duplicate Results SED-3

	Sample	Duplicate	RPD
Parameter	Concentration	Concentration	
Units	mg/kg	mg/kg	
Aluminum	6260.60	6293.94	0.5
Antimony	<8.79	< 8.79	NA
Arsenic	5.67	6.15	8.2
Barium	68.52	68.52	0.0
Beryllium	0.45	0.35	25.0
Cadmium	< 0.64	< 0.64	NA
Calcium	1873.64	1867.88	0.3
Chromium	9.45	9.20	2.6
Cobalt	7.60	7.95	4.5
Copper	8.09	7.81	3.5
Iron	14796.97	14869.70	0.5
Lead	31.18	13.39	79.8
Magnesium	2044.85	2059.70	0.7
Manganese	850.61	854.85	0.5
Mercury	<0.15	< 0.15	NA
Nickel	14.73	15.12	2.6
Potassium	228.91	239.30	4.4
Selenium	< 0.85	< 0.85	NA
Silver	<1.73	<1.73	NA
Sodium	247.82	247.67	0.1
Thallium	<1.21	<1.21	NA
Vanadium	3.87	4.52	15.4
Zinc	65.82	64.61	1.9

NA - Cannot perform a relative percent difference on values which are

below method detection limits.

Ŕ

.

Lindley South Landfill - RI/FS Groundwater Monitoring Well GW-4 Field Duplicate Comparison

4

1

7

			Dupe	%RPD
Parameter	Units	GW-4	GW-4	
Hardness	mg CaCO3/1	1265	1143	5.07
Turbidity	NTU	>1000		
TDS	. ug/1	160000		
Alkalinity	ug/1	290000		
Chloride	ug/l	4000		
Sulfate	ug/l	1170000		
Total Cyanide	ug/l	<10	<10	NA
Ammonia - N	ug/l	238		
COD	ug/l	6300		
TOC	ug/l	2200		
Aluminum	ug/l	34700	31400	4.99
Antimony	ug/l	<29.0	<29.0	NA
Arsenic	ug/l	35	23.3	20
Barium	ug/l	402	319	11.51
Beryllium	ug/l	4	3	14.29
Cadmium	ug/l	<2.0	<2.0	NA
Calcium	ug/l	317000	283000	5.67
Chromium	ug/l	53.7	45	8.81
Cobalt	ug/l	58	45.2	12.40
Copper	ug/l	86.8	96.5	5.29
Iron	ug/l	99300	82800	9.06
Lead	ug/l	102	112	4.67
Magnesium	ug/l	115000	106000	4.07
Manganese	ug/l	6280	5160	9.79
Mercury	ug/l	0.2	0.2	0.00
Nickel	ug/l	106	85.6	10.65
Potassium	ug/1	5750	5370	3.42
Selenium	ug/l	<14.0	<14.0	NA
Silver	ug/l	<5.6	< 5.6	NA
Sodium	ug/l	102000	99200	1.39
Thallium	ug/l	<4.0	<4.0	NA
Vanadium	ug/l	12.4	12.4	0.00
Zinc	ug/l	264	223	8.42

Lindley South Landfill - RI/FS Surface Water Sampling Point SW-3 Field Duplicate Comparison

			Dupe	%RPD
Parameter	Units	<u>SW-3</u>	SW-3	
Hardness	mg CaCO3/1	178	192	3.78
Turbidity	NTU	14	14	0.00
TDS	ug/l	280000	288000	1.41
Alkalinity	ug/l	112000	116000	1.75
Chloride	ug/l	60000	61000	0.83
Sulfate	ug/l	40000	40000	0.00
Total Cyanide	ug/l	< 10	<10	NA
Ammonia - N	ug/l	<100	<100	NA
COD	ug/l	< 5000	<5000	NA
TOC	ug/l	3700	3400	4.23
Aluminum	ug/l	495	577	7.65
Antimony	ug/1	<29.0	<29.0	NA
Arsenic	ug/l	< 6.5	< 6.5	NA
Barium	ug/l	49.7	55.1	5.15
Beryllium	ug/l	< 0.90	< 0.90	NA
Cadmium	ug/l	<2.0	<2.0	NA
Calcium	ug/l	50300	53700	3.27
Chromium	ug/l	<5.3	< 5.3	NA
Cobalt	ug/1	<11.3	<11.3	NA
Copper	ug/l	22.8	19.8	7.04
Iron	ug/l	1220	1410	7.22
Lead	ug/l	3.7	3.6	1.37
Magnesium	ug/l	12800	14100	4.83
Manganese	ug/l	148	160	3.90
Mercury	ug/1	0.2	< 0.2	NA
Nickel	ug/l	<14.3	<14.3	NA
Potassium	ug/l	1830	1960	3.43
Selenium	ug/l	<2.8	<2.8	NA
Silver	ug/l	< 5.6	< 5.6	NA
Sodium	ug/l	35800	40300	5.91
Thallium	ug/l	<4.0	<4.0	NA
Vanadium	ug/l	<8.2	< 8.2	NA
Zinc	ug/l	35.4	36.7	1.80

7

ine.

Lindley South Landfill - RI/FS Groundwater Monitoring Well GW-4 Field Duplicate Comparison

•

			Dupe	%RPD
Parameter	Units	<u>GW-4</u>	GW-4	
romethane	ug/l	<10	<10	NA
Bromomethane	ug/l	<10	<10	NA
Vinyl Chloride	ug/l	<10	<10	NA
Chloroethane	ug/l	<10	<10	NA
Methylene Chloride	ug/l	<10	<10	NA
Acetone	ug/l	<10	<10	NA
Carbon Disulfide	ug/l	<10	<10	NA
1,1-Dichloroethene	ug/l	<10	<10	NA
1,1-Dichloroethane	ug/l	<10	<10	NA
1,2-Dichloroethene - trans	ug/l	<10	<10	NA
Chloroform	ug/l	<10	<10	NA
1,2-Dichloroethane	ug/l	<10	<10	NA
2-Butanone	ug/l	<10	<10	NA
1,1,1-Trichloroethane	ug/l	<10	<10	NA
Carbon Tetrachloride	ug/l	<10	<10	NA
Bromodichloromethane	ug/l	<10	<10	NA
1,2-Dichloropropane	ug/l	<10	<10	NA
cis-1,3-Dichloropropene	ug/l	<10	<10	NA
Trichloroethene	ug/l	<10	<10	NA
Dibromochloromethane	ug/l	<10	<10	NA
1,1,2-Trichloroethane	ug/l	<10	<10	NA
Benzene	ug/l	<10	<10	NA
rans-1,3-Dichloropropene	ug/l	<10	<10	NA
Bromoform	ug/l	<10	<10	NA
4-Methyl-2-Pentanone	ug/l	<10	< 10	NA
2-Hexanone	ug/l	<10	< 10	NA
Tetrachloroethane	ug/l	<10	< 10	NA
1,1,2,2-Tetrachloroethane	ug/l	<10	< 10	NA
Toluene	ug/1	<10	<10	NA
Chlorobenzene	ug/1	<10	<10	NA
Ethylbenzene	ug/l	<10	< 10	NA
Styrene	ug/l	<10	< 10	NA
Xylenes (Total)	ug/l	<10	<10	NA
1,2-Dichloroethene-cis	ug/l	<10	< 10	NA

NA - Cannot perform a relative percent difference on values who are below method detection limits

. .

Lindley South Landfill - RI/FS Surface Water Sampling Point SW-3 Field Duplicate Comparison

· .	T	T	Dupe	%RPD
Parameter	Units	SW-3	SW-3	
Chloromethane	ug/l	<10	<10	NA
Bromomethane	ug/l	<10	<10	NA
Vinyl Chloride	ug/l	<10	<10	NA
Chloroethane	ug/l	<10	<10	NA
Methylene Chloride	ug/l	<10	<10	NA
Acetone	ug/l	<10	<10	NA
Carbon Disulfide	ug/l	<10	· <10	NA
1,1-Dichloroethene	ug/l	<10	<10	NA
1,1-Dichloroethane	ug/l	<10	<10	NA
1,2-Dichloroethene - trans	ug/l	<10	<10	NA
Chloroform	ug/l	<10	<10	NA
1,2-Dichloroethane	ug/l	<10	<10	NA
2-Butanone	ug/l	<10	<10	NA
1,1,1-Trichloroethane	ug/l	<10	<10	NA
Carbon Tetrachloride	ug/l	<10	<10	NA
Bromodichloromethane	ug/1	<10	<10	NA
1,2-Dichloropropane	ug/l	<10	<10	NA
cis-1,3-Dichloropropene	ug/l	<10	<10	NA
Trichloroethene	ug/l	<10	<10	NA
Dibromochloromethane	ug/l	<10	<10	NA
1,1,2-Trichloroethane	ug/l	<10	<10	NA
Benzene	ug/l	<10	<10	NA
trans-1,3-Dichloropropene	ug/l	<10	<10	NA
Bromoform	ug/l	<10	<10	NA
4-Methyl-2-Pentanone	ug/l	<10	<10	NA
2-Hexanone	ug/l	<10	<10	NA
Tetrachloroethane	ug/1	< 10	<10	NA
1,1,2,2-Tetrachloroethane	ug/l	<10	<10	NA
Toluene	ug/l	< 10	<10	NA
Chlorobenzene	ug/l	<10	<10	NA
Ethylbenzene	ug/l	<10	<10	NA
Styrene	ug/l	<10	<10	NA
Xylenes (Total)	ug/l	<10	<10	NA
1,2-Dichloroethene-cis	ug/l	<10	<10	NA

P

Ú

.

Lindley South Landfill - RI/FS Groundwater Monitoring Well GW-4 Field Duplicate Comparison

t i

-

			Dupe	%RPD
Parameter	Units	GW-4	GW-4	<u></u>
Phenol	ug/l	<10	<10	NA
bis(2-chloroethyl)ether	ug/l	<10	<10	NA
2-chlorophenol	ug/l	<10	<10	NA
1,3-Dichlorobenzene	ug/1	<10	<10	NA
1,4-Dichlorobenzene	ug/l	<10	<10	NA
1,2-Dichlorobenzene	ug/l	<10	<10	NA
2-methylphenol	ug/l	<10	<10	NA
2,2-oxybis(1-chloropropane	ug/l	<10	<10	NA
4-methylphenol	ug/l	<10	<10	NA
N-nitroso-di-n-proplyamine	ug/l	<10	<10	NA
hexachloroethane	ug/l	<10	<10	NA
nitrobenzene	ug/l	<10	<10	NA
isophorone	ug/l	<10	<10	NA
2-nitrophenol	ug/l	<10	<10	NA
2,4-Dimethylphenol	ug/l	<10	<10	NA
bis(2-chloroethoxy)methane	ug/l	<10	<10	NA
2,4-dichlorophenol	ug/l	<10	<10	NA
1,2,4-trichlorobenzene	ug/l	<10	<10	NA
naphthalene	ug/1	<10	<10	NA
4-chloroaniline	ug/l	<10	<10	NA
hexachlorobutadiene	ug/l	<10	<10	NA
4-chloro-3-methylphenol	ug/l	<10	<10	NA
2-methylnaphthalene	ug/l	<10	<10	NA
Hexachlorocyclopentadiene	ug/l	<10	<10	NA
2,4,6-trichlorophenol	ug/l	<10	<10	NA
2,4,5-trichlorophenol	ug/1	<25	<25	NA
2-chloronaphthalene	ug/l	<10	<10	NA
2-nitroaniline	ug/l	<25	<25	NA
dimethyl phthalate	ug/l	<10	<10	NA
acenaphthylene	ug/1	<10	<10	NA
2,6-dinitrotoluene	ug/l	<10	< 10	NA
3-nitroaniline	ug/l	<25	<25	NA
acenaphthene	ug/l	<10	< 10	NA

Lindley South Landfill - RI/FS Surface Water Sampling Point SW-3 Field Duplicate Comparison

Parameter	Units	SW-3	Dupe SW-3	%RPD
Phenol	ug/l	<10	<10	NA
bis(2-chloroethyl)ether	ug/l	<10	<10	NA
2-chlorophenol	ug/l	<10	<10	NA
1,3-Dichlorobenzene	ug/l	<10	<10	NA
1,4-Dichlorobenzene	ug/l	<10	<10	NA
1,2-Dichlorobenzene	ug/l	<10	<10	NA
2-methylphenol	ug/l	< 10	<10	NA
2,2-oxybis(1-chloropropane)	ug/l	<10	<10	NA
4-methylphenol	ug/l	<10	<10	NA
N-nitroso-di-n-proplyamine	ug/1	<10	<10	NA
hexachloroethane	ug/l	<10	<10	NA
nitrobenzene	ug/l	<10	<10	NA
isophorone	ug/l	<10	<10	NA
2-nitrophenol	ug/l	<10	<10	NA
2,4-Dimethylphenol	ug/l	<10	<10	NA
bis(2-chloroethoxy)methane	ug/l	<10	<10	NA
2,4-dichlorophenol	ug/l	<10	<10	NA
1,2,4-trichlorobenzene	ug/l	<10	< 10	NA
naphthalene	ug/1	< 10	<10	NA
4-chloroaniline	ug/l	<10	<10	NA
hexachlorobutadiene	ug/l	< 10	<10	NA
4-chloro-3-methylphenol	ug/l	<10	<10	NA
2-methylnaphthalene	ug/l	< 10	<10	NA
Hexachlorocyclopentadiene	ug/1 -	<10	<10	NA
2,4,6-trichlorophenol	ug/1	< 10	<10	NA
2,4,5-trichlorophenol	ug/l	<25	<25	NA
2-chloronaphthalene	ug/l	< 10	<10	NA
2-nitroaniline	ug/1	<25	<25	NA
dimethyl phthalate	ug/l	<10	< 10	NA
acenaphthylene	ug/l	<10	<10	NA
2,6-dinitrotoluene	ug/1	<10	< 10	NA
3-nitroaniline	ug/l	<25	<25	NA
acenaphthene	ug/l	<10	<10	NA

Lindley South Landfill - RI/FS Groundwater Monitoring Well GW-4 Field Duplicate Comparison

			Dupe	%RPD
Parameter	Units	GW-4	GW-4	
2,4-dinitrophenol	ug/l	<25	<25	NA
4-nitrophenol	ug/l	<25	<25	NA
dibenzofuran	ug/l	<10	<10	NA
2,4-dinitrotoluene	ug/l	<10	<10	NA
diethylphthalate	ug/l	<10	<10	NA
4-chlorophenyl-phenylether	ug/l	<10	<10	NA
fluorene	ug/l	<10	<10	NA
4-nitroaniline	ug/l	<25	<25	NA
4,6-dinitro-2-methylphenol	ug/l	<25	<25	NA
N-Nitrosodiphenylamine	ug/l	<10	<10	NA
4-bromophenyl-phenylether	ug/l	<10	<10	NA
hexachlorobenzene	ug/l	<10	<10	NA
pentachlorophenol	ug/1	<25	<25	NA
phenanthrene	ug/l	<10	<10	NA
anthracene	ug/l	<10	<10	NA
carbozole	ug/l	<10	<10	NA
Di-n-butylphthalate	ug/l	<10	<10	NA
Fluoranthene	ug/l	<10	<10	NA
pyrene	ug/l	<10	<10	NA
butylbenzylphthalate	ug/l	<10	<10	NA
3,3-dichlorobenzidine	ug/l	<10	<10	NA
benzo(a)anthracene	ug/l	<10	<10	NA
chrysene	ug/l	<10	<10	NA
bis(2-ethylhexyl)phthalate	ug/l	<10	3 (J)	NA
Di-n-octyl phthalate	ug/l	<10	<10	NA
benzo(b)fluoranthene	ug/1	<10	<10	NA
benzo(k)fluoranthene	ug/1	<10	<10	NA
benzo(a)pyrene	ug/1	<10	<10	NA
Indeno(1,2,3-cd)pyrene	ug/1	<10	<10	NA
dibenzo(a,h)anthracene	ug/l	<10	<10	NA
benzo(g,h,i)perylene	ug/l	<10	<10	NA

Lindley South Landfill - RI/FS Surface Water Sampling Point SW-3 Field Duplicate Comparison

Ţ

Ø

Ŕ

.

4.

			Dupe	%RPD
Parameter	Units	SW-3	SW-3	
2,4-dinitrophenol	ug/l	<25	<25	NA
4-nitrophenol	ug/l	<25	<25	NA
dibenzofuran	ug/1	<10	<10	NA
2,4-dinitrotoluene	ug/l	<10	<10	NA
diethylphthalate	ug/l	<10	<10	NA
4-chlorophenyl-phenylether	ug/l	<10	<10	NA
fluorene	ug/l	<10	<10	NA
4-nitroaniline	ug/l	<25	<25	NA
4,6-dinitro-2-methylphenol	ug/l	<25	<25	NA
N-Nitrosodiphenylamine	ug/l	<10	<10	NA
4-bromophenyl-phenylether	ug/l	<10	<10	NA
hexachlorobenzene	ug/l	<10	<10	NA
pentachlorophenol	ug/l	<25	<25	NA
phenanthrene	ug/l	< 10	<10	NA
anthracene	ug/l	< 10	<10	NA
carbozole	ug/l	<10	<10	NA
Di-n-butylphthalate	ug/l	<10	<10	NA
Fluoranthene	ug/l	<10	<10	NA
pyrene	ug/l	< 10	<10	NA
butylbenzylphthalate	ug/l	<10	<10	NA
3,3-dichlorobenzidine	ug/l	<10	<10	NA
benzo(a)anthracene	ug/1	<10	< 10	NA
chrysene	ug/l	<10	<10	NA
bis(2-ethylhexyl)phthalate	ug/1	8 (J)	7 (J)	6.67
Di-n-octyl phthalate	ug/l	<10	<10	NA
benzo(b)fluoranthene	ug/l	< 10	< 10	NA

Lindley South Landfill - RI/FS Surface Water Sampling Point SW-3 Field Duplicate Comparison

-			Dupe	%RPD
Parameter	Units	SW-3	SW-3	
benzo(k)fluoranthene	ug/l	<10	<10	NA
benzo(a)pyrene	ug/1	<10	<10	NA
Indeno(1,2,3-cd)pyrene	ug/1	<10	<10	NA
dibenzo(a,h)anthracene	ug/l	<10	<10	NA
benzo(g,h,i)perylene	ug/l	<10	<10	NA
alpha -BHC	ug/l	< 0.05	< 0.05	NA
beta-BHC	ug/l	< 0.05	< 0.05	NA
delta-BHC	ug/l	< 0.05	< 0.05	NA
gamma-BHC(Lindane)	ug/l	< 0.05	< 0.05	NA
Heptachlor	ug/l	< 0.05	< 0.05	NA
Aldrin	ug/l	< 0.05	< 0.05	NA
Heptachlor epoxide	ug/l	< 0.05	< 0.05	NA
Endosulfan I	ug/l	< 0.05	< 0.05	NA
Dieldrin	ug/l	< 0.10	< 0.10	NA
4,4' -DDE	ug/l	< 0.10	<0.10	NA
Endrin	ug/l	< 0.10	<0.10	NA
Endosulfan II	ug/l	< 0.10	<0.10	NA
4,4'-DDD	ug/l	< 0.10	<0.10	NA
Endosulfan Sulfate	ug/l	< 0.10	<0.10	NA
4,4'-DDT	ug/1	< 0.10	<0.10	NA
Methoxychlor	ug/1	< 0.50	< 0.50	NA
Endrin Ketone	ug/1	< 0.10	<0.10	NA
Endrin Aldehyde	ug/l	< 0.10	< 0.10	NA
alpha-chlordane	ug/l	< 0.05	< 0.05	NA
gamma-chlordane	ug/l	< 0.05	< 0.05	NA
Toxaphene	ug/l	<5.0	<5.0	NA
Aroclor 1016	ug/l	<1.0	<1.0	NA
Aroclor 1221	ug/l	<2.0	<2.0	NA
Aroclor 1232	ug/l	<1.0	<1.0	NA
Aroclor 1242	ug/l	<1.0	<1.0	NA
Aroclor 1248	-	<1.0	<1.0	NA
Aroclor 1254	-	<1.0	<1.0	NA
Aroclor 1260	-	1		1
Aroclor 1254	ug/l ug/l ug/l		1	1

; ,

ŧ.

į.,

NA - Cannot perform a relative percent difference on values who are below method detection limits

APPENDIX - D

-PART 360 Expanded, Baseline, and Routine Parameter Lists; -Class GA and Class C Water Quality Standards; and -Historical Analytical Data LANDFILLS

•

WATER QUALIT (ANALYSIS TABLES

ROUTINE PARAMETERS¹

			le la constante de la constante
Common Name ²	CAS RN³	Suggested Methods	PQL⁴ (μg/1)
Field Parameters:			
Static water level (in wells and sumps) Specific Conductance Temperature Floaters or Sinkers ⁵ pH		9050 9040 9041	
Eh Dissolved Oxygen ⁶ Field Observations ⁷ Turbidity		180.1	
Leachate Indicators:			
Total Kjeldahl Nitrogen		351.1 351.2 351.3	60
Ammonia	7 564-41-7	351.4 350.1 350.2	200 60
Nitrate Chemical Oxygen Demand		350.3 9200 410.1 410.2 410.3	100 50000 50000 50000 80000
Biochemical Oxygen Demand (BOD ₅)		410.4 405.1	2000
Total Organic Carbon Total Dissolved Solids Sulfate		9060 160.1 9035 9036 9038	40000
Alkalinity		310.1 310.2	20000 6000
Phenols Chloride	108-95-2	8040 9250 9251 9252	
Bromide Total hardness as CaCO ₃		320.1 130.1 130.2	2000 20000 30000



Common Name ²	CAS RN ³	Suggested Methods	PQL⁴ (µg/1)
Inorganic Parameters:	· · ·		
Cadmium	(Total)	6010 7130 7131	40 50 1
Calcium Iron	(Total) (Total)	7140 7380 7381	40 100 4
Lead	(Total)	6010 7420 7421	400 1000 10
Magnesium Manganese	(Total) (Total)	7450 7460 7461	4 40 0.8
Potassium Sodium	(Total) (Total)	7610 7770	40 8

ROUTINE PARAMETERS¹

2-28

The department may modify this list as necessary.

Notes

'This list contains parameters for which possible analytical procedures are provided in EPA Report SW-846 <u>Test Methods for Evaluating Solid Waste</u>, third edition, November 1986, as revised December 1987, and <u>Methods for Chemical Analysis of Water and Wastes</u>, USEPA-600/4-79-020, March, 1979. The regulatory requirements pertain only to the list of parameters; the right hand columns (Methods and PQL) are given for informational purposes only. See also footnote 4.

²Common names are those widely used in government regulations, scientific publications, and commerce; synonyms exist for many chemicals.

³Chemical Abstracts Service Registry Number. Where "Total" is entered, all species in the groundwater that contain this element are included.

⁴Practical Quantitation Limits (PQLs) are the lowest concentrations of analytes in groundwaters that can be reliably determined within specified limits of precision and accuracy by the indicated methods under routine laboratory operating conditions. The PQLs listed are generally stated to one significant figure. PQLs are based on 5 ml samples for volatile organics and 1 L samples for semivolatile organics. CAUTION: The PQL values in many cases are based only on a general estimate for the method and not on a determination for individual compounds; PQLs are not a part of the regulation.

⁵Any floaters or sinkers found must be analyzed separately for baseline parameters.

"Surface water only.

'Any unusual conditions (colors, odors, surface sheens, etc.) noticed during well development, purging, or sampling must be reported.

LANDFILLS

BASELINE PARAMETERS¹

Common Name²	CAS RN ³	Suggested Methods	PQL⁴ (µg/1)
Field Parameters:			
Static water level (in wells and sumps) Specific Conductance Temperature Floaters or Sinkers ⁵ pH		9050 9040 9041	
Eh Dissolved Oxygen ⁶ Field Observations ⁷ Turbidity		180.1	
Leachate Indicators:			
Total Kjeldahl Nitrogen		351.1 351.2 351.3	60
Ammonia	7664-41-7	351.3 351.4 350.1 350.2 350.3	200 60 100
Nitrate Chemical Oxygen Demand		9200 410.1 410.2 410.3 410.4	50000 50000 50000 80000
Biochemical Oxygen Demand (BOD₅)		405.1	2000
Total Organic Carbon Total Dissolved Solids Sulfate		9060 160.1 9035 9036 9038	40000
Alkalinity		310.1 310.2	20000 6000
Phenols Chloride	108-95-2	8040 9250 9251 9252	
Bromide Total hardness as CaCO ₃	24959-67-9	320.1 130.1 130.2	2000 20000 30000
Color		110.1 110.2 110.3	80



Ì


BASELINE PARAMETERS¹

BASELINE PARAMETERS						
Common Name ²	CAS RN ³	Suggested Methods	PQL⁴ (µg/1)			
Boron	7440-42-8					
Inorganic Parameters:						
•1	(Tatal)	7020	10			
Aluminum	(Total)	6010	300			
Antimony	(Total)					
		7040 7041	2000			
	(Tabal)		30			
Arsenic	(Total)	6010	500			
		7060	10			
	·~ · · · ·	7061	20			
Barium	(Total)	6010	20			
	·- · · ·	7080	1000			
Beryllium	(Total)	6010	3			
		7090	50			
		7091	2			
Cadmium	(Total)	6010	40			
		7130	50			
		7131	1			
Calcium	(Total)	7140	40			
Chromium	(Total)	6010	70			
		7190	500			
		7191	10			
Chromium (Hexavalent) [*]	18540-29-9	7195				
		7196	600			
		7197	30			
		7198				
Cobalt	(Total)	6010	70			
		7200	500			
		7201	10			
Copper	(Total)	6010	60			
		7210	200			
		7211	10			
Cyanide	(Total)	9010	200			
Iron	(Total)	7380	100			
		7381	4			
Lead	(Total)	6010	400			
		7420	1000			
		7421	10			
Magnesium	(Total)	7450	4			
Manganese	(Total)	7460	40			
	()	7461	0.8			
Mercury	(Total)	7470	2			
Nickel	(Total)	6010	150			
		7520	400			
Potassium	(Total)	7610	40			
TULQJJIUIII		1 /010	<u></u>			

LANDFILLS

BASELINE PARAMETER	S1
--------------------	----

BASELINE PARAMETERS				
Common Name ²	CAS RN ³	Suggested Methods	PQL⁴ (µg/1)	
Selenium	(Total)	6010 7740	750 20 20	
Silver	(Total)	7741 6010 7760	70 100	
Sodium Thallium	(Total) (Total)	7761 7770 6010	10 8 400	
Vanadium	(Total)	7840 7841 6010	1000 10 80	
Zinc	(Total)	7910 7911 6010	2000 40 20 50	
		7950 7951	0.5	
Organic Parameters:				
Acetone Acrylonitrile	67-64-1 107-13-1	8260 8030	100 5 200	
Benzene	71-43-2	8260 8020 8021	2 0.1	
Bromochloromethane	74-97-5	8260 8021 8260	5 0.1 5	
Bromodichloromethane	75-27-4	8010 8021 8260	1 0.2 5	
Bromoform; Tribromomethane	75-25-2	8010 8021	2 15	
Carbon disulfide Carbon tetrachloride	75-15-0 56-23-5	8260 8260 8010	5 100 1	
Chlorobenzene	108-90-7	8021 8260 8010	0.1 10 2	
		8020 8021	2 0.1	
Chloroethane; Ethyl chloride	, 75-00-3	8260 8010 8021	5 5 1	



BASELINE PARAMETERS¹

BASELINE PARAMETERS					
Common Name ²	CAS RN ³	Suggested Methods	PQL⁴ (µg/1)		
Chloroform; Trichloromethane	67-66-3	8010 8021	0.5 0.2		
Dibromochloromethane; Chlorodibromomethane	124-48-1	8260 8010 8021	5 1 0.3		
1,2-Dibromo-3-chloropro- pane; DBCP	96-12-8	8260 8011 8021	5 0.1 30		
1,2-Dibromoethane; Ethyl- ene dibromide; EDB	106-93-4	8260 8011 8021	25 0.1 10		
o-Dichlorobenzene; 1,2-Dichlorobenzene	95-50-1	8260 8010 8020	5 2 5		
		8021 8120 8260 8270	0.5 10 5 10		
p-Dichlorobenzene; 1,4-Dichlorobenzene	106-46-7	8010 8020 8021	2 5 0.1		
		8120 8260 8270	15 5 10		
trans-1,4-Dichloro-2-bu-					
tene	110-57-6	8260	100		
1,1-Dichloroethane;	75-34-3	8010			
Ethylidene chloride		8021	0.5 5		
1 2 Dichlonoothano.	107-06-2	8260 8010	0.5		
1,2-Dichloroethane; Ethylene dichloride	107-00-2	8021	0.3		
Ethyrene urthforfide		8260	5		
1,1-Dichloroethylene;	75-35-4	8010	1		
1,1-Dichloroethene;		8021	0.5		
Vinylidene chloride		8260	5		
cis-1,2-Dichloroethylene;	156-59-2	8021	0.2		
cis-1,2-Dichloroethene		8260	5		
trans-1,2-Dichloroethyl-	156-60-5	8010	1		
ene; trans-1,2-Dichloro-		8021	0.5		
ethene		8260	5		
1,2-Dichloropropane; Pro-	78-87-5	8010	0.5		
pylene dichloride		8021	0.05		
ais 1.2 Dichlemennene	10061-01-5	8260 8010	5 20		
cis-1,3-Dichloropropene	10001-01-5	8260	10		
trans-1,3-Dichloropropene.	10061-02-6	8010 8260	10 5 10		



Bł	łS	EL	IN	Ε	PA	RA	ME	TERS ¹

DAJL	LINE PARAMETER	()	
Common Name ²	CAS RN ³	Suggested Methods	PQL⁴ (µg/1)
Ethylbenzene	100-41-4	8020 8221 8260	2 0.05 5
2-Hexanone; Methyl butyl		8200	5
ketone	591-78-6	8260	50
Methyl bromide; Bromo-	74-83-9	8010	20
methane		8021	10
Methyl chloride; Chloro-	74-87-3	8010	1
methane		8021	0.3
Methylene bromide; Dibro-	74-95-3	8010	15 20
momethane		8021 8260	10
Methylene chloride;	75-09-2	8010	5
Dichloromethane	r J-0 <i>3-L</i>	8021	0.2
Dichiolome on and the transmission		8260	10
Methyl ethyl ketone; MEK;	78-93-3	8015	10
2-Butanone		8260	100
Methyl iodide; Iodomethane	74-88-4	8010	40
-		8260	10
4-Methy1-2-pentanone;	108-10-1	8015	5
Methyl isobutyl ketone	100 10 5	8260	100
Styrene	100-42-5	8020	1 0.1
		8021 8260	10
1,1,1,2-Tetrachloroethane.	630-20-6	8010	5
1,1,1,2-Tett attribut betildile.	030-20-0	8021	0.05
		8260	5
1,1,2,2-Tetrachloroethane.	79-34-5	8010	0.5
-,-,-,-		8021	0.1
		8260	5
Tetrachloroethylene; Tet-	127-18-4	8010	0.5
rachloroethene; Per-		8021	0.5
chloroethylene		8260	5
Toluene	108-88-3	8020	2 0.1
		8021 8260	5
1,1,1-Trichloroethane;	71-55-6	8010	0.3
Methylchloroform	/1-55-0	8021	0.3
netny (1110) 010181		8260	5
1,1,2-Trichloroethane	79-00-5	8010	0.2
,,		8260	5
Trichloroethylene; Tri-	79-01-6	8010	
chloroethene		8021	0.2
		8260	5
Trichlorofluoromethane;	75-69-4	8010	10
CFC-11		8021	0.3
		8260	5



Common Name ²	CAS RN ³	Suggested Methods	PQL⁴ (µg/1)
1,2,3-Trichloropropane	96-18-4	8010 8021 8260	10 5 15
Vinyl acetate Vinyl chloride; Chloro- ethene	108-05-4 75-01-4	8260 8010 8021	50 2 0.4
Xylenes	1330-20-7	8260 8020 8021 8260	10 5 0.2 5

BASELINE PARAMETERS¹

The department may modify this list as necessary.

Notes

'This list contains 47 volatile organics for which possible analytical procedures provided in EPA Report SW-846 Test Methods for Evaluating Solid Waste, third edition, November 1986, as revised December 1987, includes Method 8260; 25 metals for which SW-846 provides either Method 6010 or a method from the 7000 series of methods; and additional parameters for which possible procedures are provided in <u>Methods for Chemical Analysis of Water and Wastes</u>, USEPA-600/4-79-020, March, 1979. The regulatory requirements pertain only to the list of parameters; the right hand columns (Methods and PQL) are given for informational purposes only. See also footnote 4.

²Common names are those widely used in government regulations, scientific publications, and commerce; synonyms exist for many chemicals.

³Chemical Abstracts Service Registry Number. Where "Total" is entered, all species in the groundwater that contain this element are included.

⁴Practical Quantitation Limits (PQLs) are the lowest concentrations of analytes in groundwaters that can be reliably determined within specified limits of precision and accuracy by the indicated methods under routine laboratory operating conditions. The PQLs listed are generally stated to one significant figure. PQLs are based on 5 ml samples for volatile organics and 1 L samples for semivolatile organics. CAUTION: The PQL values in many cases are based only on a general estimate for the method and not on a determination for individual compounds; PQLs are not a part of the regulation.

⁵Any floaters or sinkers found must be analyzed separately for baseline parameters.

*Surface water only.

'Any unusual conditions (colors, odors, surface sheens, etc.) noticed during well development, purging, or sampling must be reported.

The department may waive the requirement to analyze Hexavalent Chromium provided that Total and Hexavalent and Trivalent Chromium values do not exceed 0.05 mg/l.

EXPANDED PARAMETERS ¹					
Common Name ²	CAS RN ³	Suggested Methods ⁴	PQL⁵ (µg/l)		
Field Parameters:		Mechods	<u></u>		
Static water level (in wells and sumps) Specific Conductance Temperature Floaters or Sinkers ⁶ pH Eh Dissolved Oxygen ⁷ Field Observations ⁸		9050 9040 9041			
Turbidity		180.1			
Leachate Indicators: Total Kjeldahl Nitrogen Ammonia Nitrate	7664-41-7	351.1 351.2 351.3 351.4 350.1	60 200 60 100		
Chemical Oxygen Demand Biochemical Oxygen Demand (BOD ₅) Total Organic Carbon Total Dissolved Solids Sulfate		350.2 350.3 9200 410.1 410.2 410.3 410.4 405.1	50000 50000 50000 80000 2000		
Alkalinity Phenols Chloride Bromide Total hardness as CaCO ₃	108-95-2 24959-67-9	9060 160.1 9035 9036 9038 310.1 310.2 8040 9250	20000 6000 2000		
		9251 9252 320.1 130.1 130.2	20000 30000		

٠

EXPANDED PARAMETERS¹

P

Ń

Í

Ê

Á

Í

Í

Á

Ó

Ó

B

Í

.

	NDED PARAMETER		
Common Name ²	CAS RN3	Suggested	PQL⁵ (µg/l)
		Methods ⁴	(µg/1)
Color		110.1 110.2	
Boron	7440-42-8	110.3	80
Inorganic Parameters:			
Aluminum Antimony	(Total) (Total)	7020 6010 7040	10 300 2000
Arsenic	(Total)	7041 6010 7060	30 500 10
Barium Beryllium	(Total)	7061 6010 7080	20 20 1000
Derytttum	(Total)	6010 7090	3 50
Cadmium	(Total)	7091 6010 7130	2 40 50
Calcium Chromium	(Total) (Total)	7131 7140 6010	1 40 70
Chromium (Hexavalent)*	18540-29-9	7190 7191 7195 7196	500 10 600
Cobalt	(Total)	7197 7198 6010 7200	30 70 500
Copper	(Total)	7201 6010 7210	10 60 200
Cyanide Iron	(Total) (Total)	7211 9010 7380	10 200 100
Lead	(Total)	7381 6010 7420	400 400 1000
Magnesium Manganese	(Total) (Total)	7421 7450 7460	10 10 4 40
Mercury	(Total)	7461 7470	0.8 2

EXPANDED PARAMETERS¹

H

EXPANDED PARAMETERS'					
Common Name ²	CAS RN3	Suggested	PQL ⁵		
		Methods ⁴	(µg/l)		
Nickel	(Total)	6010 7520	150 400		
Potassium Selenium	(Total)	7610 6010	40 750		
	(Total)	7740 7741	20 20		
Silver	(Total)	6010	70 100		
Sodium	(Total)	7760 7761 7770	10 8 4000		
Sulfide Thallium	18496-25- 8	9030 6010	4000 400 1000		
Tin	(Total)	7840	10 40		
Vanadium	(Total)	6010 6010	80 2000 40		
Zinc	(Total)	7910 7911 6010	20 50		
	(Total)	7950 7951	0.5		
Organic Parameters:	·				
Acenaphthene	83-32-9	8100 8270	200 10		
Acenaphthylene	208-96-8	8100 8270	200 10		
Acetone Acetonitrile; Methyl	67-64-1	8260	100		
cyanide	75-05-8 98-86-2	8015 8270	100 10		
Acetophenone 2-Acetylaminofluorene; 2-AAF	53-96-3 107-02-8	8270 8030	20 5		
Acrolein	107-13-1	8260 8030	100 5		
Acrylonitrile	309-00-2	8260 8080	200 0.05		
Aldrin	107-05-1	8270 8010	10 5		
Allyl chloride	92-67-1	8260 8270	10 20		
4-Aminobiphenyl Anthracene	120-12-7	8100 8270	200 10		
			I		

.

EXPANDED PARAMETERS¹

Í

Í

EXPA	NDED PARAMETER	5	
Common Name ²	CAS RN3	Suggested	PQL ⁵
		Methods ⁴	(µg/l)
Benzene	71-43-2	8020	2
		8021	0.1
		8260	5
Benzo[a]anthracene;	56-55-3	8100	200
Benzanthracene		8270	10
Benzo[b]fluoranthene	205-99-2	8100	200
		8270	10
Benzo[k]fluoranthene	207-08-9	8100	200
		8270	10
Benzo[ghi]perylene	191-24-2	8100	200
		8270	10
Benzo[a]pyrene	50-32-8	8100	200
Denzolajpyrenettittittitti		8270	10
Benzyl alcohol	100-51-6	8270	20
alpha-BHC	319-84-6	8080	0.05
	515 61 6	8270	10
beta-BHC	319-85-7	8080	0.05
Deca-bite	515 05 1	8270	20
delta-BHC	319-86-8	8080	0.1
	519-00-0	8270	20
DUC. Lindene	58-89-9	8080	0.05
gamma-BHC; Lindane	30-09-9	8270	20
	111 01 1	8110	20
Bis(2-chloroethoxy)methane	111-91-1	1	
		8270	10
Bis(2-chloroethyl) ether;	111-44-4	8110	3
Dichloroethyl ether		8270	10
Bis-(2-chloro-1-methyl-	108-60-1	8110	10
ethyl) ether; 2,2 ^I -Di-		8270	10
chlorodiisopropyl			
ether; DCIP, See note			
9	117-81-7	8060	20
Bis(2-ethylhexyl)phthalate	74-97-5	8021	0.1
Bromochloromethane;		8260	5
Chlorobromomethane	75-27-4	8010	1
Bromodichloromethane;		8021	0.2
		8260	5
Dibromochloromethane	75-25-2	8010	2
Bromoform; Tribromomethane		8021	15
		8260	5
	101-55-3	8110	25
4-Bromophenyl phenyl ether	· · ·	8270	10
	85-68-7	8060	5
Butyl benzyl phthalate;		8270	10
Benzyl butyl phthalate	75-15-0	8260	100
Carbon disulfide	56-23-5	8010	1
Carbon tetrachloride		8021	0.1
		8260	10
	L	1	I

EXPANDED PARAMETERS¹

B

0

t I

Ì

.

Ethyl chloride 67-66-3 8021 10 Chloroform; Trichloromethane 91-58-7 8260 0.5 2-Chloronaphthalene 91-58-7 8260 10 2-Chlorophenol 95-57-8 8270 5 2-Chlorophenol 95-57-8 8270 5 2-Chlorophenol 95-57-8 8270 5 2-Chlorophenol 95-57-8 8270 50 2-Chlorophenol 95-57-8 8270 50 2-Chlorophenol 95-57-8 8270 40 4-Chlorophenyl 8110 10 10 phenyl ether 126-99-8 8270 50 Chloroprene 126-99-8 8270 10 m-Cresol; 3-methylphenol 95-48-7 8270 10 p-Cresol; 4-methylphenol 94-75-7 8270 10 acid 72-55-9 8080 0.11 acid 72-55-9 8080 0.10 4, 4 ¹ -DDT 8270 10 10 bibenz(a,h) anthracene 8270<	EXPA	NDED PARAMETER	.S*	
Methods* Methods* Chlordane See Note 10 8080 0.1 p-Chloroaniline 106-47-8 8270 20 Chlorobenzene 108-90- 8010 2 7 8020 0.1 generation 108-90- 8010 2 7 8020 0.1 Chlorobenzilate 510-15-6 8260 10 p-Chloro-m-cresol; 59-50-7 8270 5 4-Chloro-3-methylphenol. 75-00-3 8270 5 Chloroform; 8010 1 1 Ethyl chloride 8021 10 0 2-Chloronaphthalene 91-58-7 8260 10 2-Chlorophenol 91-58-7 8270 50 Chlorophenyl 8110 10 10 phenyl ether 95-57-8 8270 50 Chlorophenyl 126-99-8 8270 50 Chlorophenyl 8100 10 10	Common Name ²	CAS RN ³	Suggested	
p-Chloroaniline 106-47-8 8270 20 chlorobenzene 108-90- 8010 2 7 8020 0.1 Bolio 2 20 Chlorobenzilate 510-15-6 8260 10 p-Chloro-m-cresol; 59-50-7 8270 5 Chlorobenzilate 510-15-6 8260 10 p-Chloro-m-cresol; 59-50-7 8270 5 Chlorobenzilate 510-15-6 8260 10 p-Chloro-a-methylphenol. 75-00-3 8270 5 Chloroform; 8010 1 10 Ethyl chloride 8010 0.2 5 Chloroform; 91-58-7 8260 10 2-Chloronaphthalene 91-58-7 8270 50 2-Chlorophenol 91-58-7 8270 50 2-Chlorophenol 8010 20 20 4-Chlorophenyl 116-99-8 8270 50 phenyl ether 106-44-5 8270 10 0-Cresol; 3-methylphenol<			Methods ⁴	(µg/1)
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	Chlordane	See Note 10		
Chlorobenzene	n Chlanasnilina	106 17 0	1 1	
780200.1Chlorobenzilate510-15-6826010p-Chloro-m-cresol;510-15-68260104-Chloro-3-methylphenol.75-00-382705Chloroethane;80101Ethyl chloride802110Chloroform;80100.2Trichloromethane91-58-782602-Chlorophenol91-58-782602-Chlorophenol95-57-882702-Chlorophenol95-57-882702-Chlorophenol95-57-882702-Chlorophenol126-99-882704-Chlorophenyl126-99-88270phenyl ether126-99-88270Chloroprene95-57-7100-Cresol; 3-methylphenol95-48-782700-Cresol; 2-methylphenol94-75-7100-Cresol; 4-methylphenol94-75-710106-44-5827010106-44-58270104, 4 ¹ -DDT72-55-980804, 4 ¹ -DDT50-29-380804, 4 ¹ -DDT2303-16-480801122-64-9810010Dibenzofuran124-48-18270Dibenzofuran82701053-70-382701053-70-382701053-70-382701053-70-3827010124-48-1827010124-48-182701124-48-18270 <td></td> <td></td> <td></td> <td></td>				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Childiobenzene		0010	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$,	8020	
$\begin{array}{c c c c c c c c c c c c c c c c c c c $				
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	Chlorobenzilate	510-15-6	8260	10
4 -Chloro-3-methylphenol. Chloroethane; Ethyl chloride $75-00-3$ 8040 8010 20 			8270	5
Chloroethane; 8010 1 Ethyl chloride 67-66-3 8021 10 Chloroform; 91-58-7 8260 0.5 Trichloromethane 91-58-7 8260 10 2-Chloronaphthalene 91-58-7 8260 10 2-Chlorophenol 95-57-8 8270 5 2-Chlorophenol 95-57-8 8270 5 2-Chlorophenol 7005-72-3 8270 50 2-Chlorophenol 126-99-8 8270 50 Chloroprene 126-99-8 8270 50 Chloroprene 126-99-8 8270 50 Chloroprene 126-99-8 8270 10 0-Cresol; 3-methylphenol 95-48-7 8270 10 0-Cresol; 4-methylphenol 106-44-5 8270 10 0-Cresol; 4-methylphenol 106-44-5 8270 10 10 94-75-7 0.1 10 10 2,4-D; 2,4-Dichlorophen- 94-75-7 0.1 10 4,4 ¹ -DDT 50-29-3 808	F		8040	20
Chloroethane; 8010 1 Ethyl chloride 67-66-3 8260 10 Chloroform; 91-58-7 8021 5 Trichloromethane 91-58-7 8260 10 2-Chloronaphthalene 91-58-7 8260 10 2-Chlorophenol 91-58-7 8270 5 2-Chlorophenol 95-57-8 8270 5 2-Chlorophenyl 8110 10 0 phenyl ether 126-99-8 8270 50 Chloroprene 218-01-9 8260 200 Chrysene 106-39-4 8270 10 p-Cresol; 3-methylphenol 106-44-5 8270 10 p-Cresol; 4-methylphenol 106-44-5 8270 10 p-Cresol; 4-methylphenol 106-44-5 8270 10 acid 72-55-9 8080 0.05 4, 4 ¹ -DDD 72-55-9 8080 0.11 acid 50-29-3 8080 0.1 132-64-9 8100 10 Dibenzofuran	4-Chloro-3-methylphenol.	75-00-3	8270	5
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Chloroethane;	,	8010	1
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Ethyl chloride		8021	10
Trichloromethane $91-58-7$ 8021 5 2-Chloronaphthalene $91-58-7$ 8260 10 2-Chlorophenol $95-57-8$ 8270 5 2-Chlorophenol $95-57-8$ 8270 5 2-Chlorophenol $7005-72-3$ 8270 40 4-Chlorophenyl 8110 10 phenyl ether $126-99-8$ 8270 50 Chloroprene $126-99-8$ 8270 50 Chrysene $126-99-8$ 8270 10 m-Cresol; 3-methylphenol $95-48-7$ 8270 10 o-Cresol; 2-methylphenol $106-44-5$ 8270 10 p-Cresol; 4-methylphenol $94-75-7$ 10 0.1 $2, 4-D; 2, 4-Dichlorophen-94-75-70.10.1acid72-55-980800054, 4^1-DDT50-29-380800.1billate53-70-3827010Dibenz[a,h]anthracene132-64-9810010Dibenzofuran124-48-182701Dibenzofuran8010553-70-38270Chlorodibromomethane;8010550-39$	-	67-66-3	8260	0.5
111 Child Formula (11111) $91-58-7$ 8260 10 2-Chloronaphthalene $95-57-8$ 8270 5 2-Chlorophenol $95-57-8$ 8270 5 2-Chlorophenol $7005-72-3$ 8270 40 4-Chlorophenyl $126-99-8$ 8270 50 chloroprene $126-99-8$ 8270 50 Chloroprene $126-99-8$ 8270 50 Chloroprene $126-99-8$ 8270 50 Chrysene $126-99-8$ 8270 50 chloroprene $126-99-8$ 8270 10 m-Cresol; 3-methylphenol $95-48-7$ 8270 10 p-Cresol; 4-methylphenol $95-48-7$ 8270 10 p-Cresol; 4-methylphenol $95-48-7$ 8270 10 p-Cresol; 2-methylphenol $106-44-5$ 8270 10 p-Cresol; 4-methylphenol $94-75-7$ 0.1 10 $acid72-55-980800.054, 4^1-DDE4, 4^1-DDE50-29-380800.14, 4^1-DDT53-70-3827010Dibenz(a,h)anthracene132-64-9810010Dibenzofuran124-48-182701Dibenzofuran8270110Dibenzofuran8270110Dibenzofuran8270110Dibenzofuran8270110Dibenzofuran$	Chloroform;		8010	0.2
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	Trichloromethane			5
2-Chlorophenol $95-57-8$ 8270 5 2-Chlorophenol $7005-72-3$ 8040 10 4 -Chlorophenyl 8110 10 phenyl ether $126-99-8$ 8270 50 Chloroprene $126-99-8$ 8270 50 Chrysene 8010 20 Chrysene 8100 10 m-Cresol; 3-methylphenol $95-48-7$ 8270 o-Cresol; 2-methylphenol $106-44-5$ 8270 p-Cresol; 4-methylphenol $94-75-7$ 01 oxyacetic $72-55-9$ 8080 0.05 $4, 4^1$ -DDE $72-55-9$ 8080 0.05 $4, 4^1$ -DDT $50-29-3$ 8080 0.11 Diallate $53-70-3$ 8270 10 Dibenzofuran $132-64-9$ 8100 10 Dibenzofuran $124-48-1$ 8270 10 Chlorodibromomethane; 8021 $50-29-3$		91-58-7		
2-Chlorophenol 8040 10 4-Chlorophenyl 8110 10 phenyl ether 126-99-8 8270 50 Chloroprene 8010 20 Chrysene 8100 10 m-Cresol; 3-methylphenol 95-48-7 8270 10 o-Cresol; 2-methylphenol 95-48-7 8270 10 o-Cresol; 4-methylphenol 94-75-7 01 01 2,4-D; 2,4-Dichlorophen- 94-75-7 0.1 01 oxyacetic 72-55-9 8080 0.05 0.1 acid 72-55-9 8080 0.05 0.1 4,4 ¹ -DDD 50-29-3 8080 0.05 0.1 biallate 53-70-3 8270 10 0 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibenzofuran 132-64-9 8100 10 Dibenzofuran 132-64-9 8001 10 Dibenzofuran 8270 10 10 Chlorodibromomethane; 8270 10 10	2-Chloronaphthalene		1 1	
4-Chlorophenyl phenyl ether $7005-72-3$ 8110 8270 $126-99-8$ 40 8110 $126-99-8$ Chloroprene 8010 20 20 200 $Chrysene$		95-57-8	1	
4-Chlorophenyl phenyl ether 8110 10 phenyl ether 126-99-8 8270 50 Chloroprene 218-01-9 8260 200 Chrysene 8100 10 10 m-Cresol; 3-methylphenol 95-48-7 8270 10 o-Cresol; 2-methylphenol 95-48-7 8270 10 p-Cresol; 4-methylphenol 94-75-7 8270 10 z, 4-D; 2, 4-Dichlorophen- oxyacetic 94-75-7 10 10 acid 72-55-9 8080 0.05 4, 4 ¹ -DDD 72-55-9 8080 0.1 biallate 50-29-3 8080 0.1 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibenzofuran 132-64-9 8100 10 Dibenzofuran 124-48-1 8270 1 Diboromochloromethane; 8010 5 5	2-Chlorophenol			-
phenyl ether 126-99-8 8270 50 Chloroprene 218-01-9 8260 200 Chrysene 108-39-4 8270 10 m-Cresol; 3-methylphenol 95-48-7 8270 10 o-Cresol; 2-methylphenol 106-44-5 8270 10 p-Cresol; 4-methylphenol 94-75-7 8270 10 z,4-D; 2,4-Dichlorophen- 94-75-7 0.1 0.1 oxyacetic 72-54-8 8150 10 acid 72-55-9 8080 0.05 4,4 ¹ -DDD 50-29-3 8080 0.1 bienz[a,h]anthracene 132-64-9 8100 10 Dibenzofuran 132-64-9 8100 10 Dibromochloromethane; 8270 1 10 Chlorodibromomethane 8010 5 5		7005-72-3		
Chloroprene 8010 20 Chrysene 218-01-9 8260 200 m-Cresol; 3-methylphenol 108-39-4 8270 10 o-Cresol; 2-methylphenol 95-48-7 8270 10 p-Cresol; 4-methylphenol 106-44-5 8270 10 x-10; 2, 4-Dichlorophen- 94-75-7 0.1 0 oxyacetic 72-55-9 8080 0.05 4, 4 ¹ -DDD 72-55-9 8080 0.1 4, 4 ¹ -DDT 50-29-3 8080 0.1 Diallate 53-70-3 8270 10 Dibenz[a,h]anthracene 132-64-9 8100 10 Diberzofuran 124-48-1 8270 1 Dibromochloromethane; 8010 5 5				
218-01-9 8260 200 Chrysene		126-99-8	1 7 1	
Chrysene 108-39-4 8100 10 m-Cresol; 3-methylphenol 95-48-7 8270 10 o-Cresol; 2-methylphenol 106-44-5 8270 10 p-Cresol; 4-methylphenol 106-44-5 8270 10 2,4-D; 2,4-Dichlorophen- 94-75-7 10 oxyacetic 72-54-8 0.1 acid 72-55-9 8080 0.055 4,4 ¹ -DDD 72-55-9 8080 0.1 4,4 ¹ -DDT 50-29-3 8080 0.1 biallate 53-70-3 8270 10 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibromochloromethane; 124-48-1 8270 1 Dibromochloromethane; 8010 5 5	Chloroprene		1	
108-39-4 8270 10 m-Cresol; 3-methylphenol 95-48-7 8270 10 o-Cresol; 2-methylphenol 106-44-5 8270 10 p-Cresol; 4-methylphenol 94-75-7 10 0.1 acid 94-75-7 0.1 0 acid 72-55-9 8080 0.055 4,4 ¹ -DDD 72-55-9 8080 0.1 4,4 ¹ -DDT 50-29-3 8080 0.1 bibenz[a,h]anthracene 132-64-9 8100 10 Dibenzofuran 132-64-9 8100 10 Dibromochloromethane; 8270 0.3 8010 5		218-01-9		
m-Cresol; 3-methylphenol 95-48-7 8270 10 o-Cresol; 2-methylphenol 106-44-5 8270 10 p-Cresol; 4-methylphenol 94-75-7 10 10 2,4-D; 2,4-Dichlorophen- 94-75-7 0.1 10 oxyacetic 72-54-8 0.1 10 acid 72-55-9 8080 0.05 4,4 ¹ -DDD 50-29-3 8080 0.1 4,4 ¹ -DDT 50-29-3 8080 0.1 billate 53-70-3 8270 10 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibenzofuran 124-48-1 8270 1 Dibromochloromethane; 8010 5 5	Chrysene	100.00.4		
o-Cresol; 2-methylphenol 106-44-5 8270 10 p-Cresol; 4-methylphenol 94-75-7 10 oxyacetic 72-54-8 0.1 acid 72-55-9 8080 0.05 4,4 ¹ -DDD 72-55-9 8080 0.1 4,4 ¹ -DDT 50-29-3 8080 0.1 biallate 2303-16-4 8080 10 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibromochloromethane; 124-48-1 8270 10				_
p-Cresol; 4-methylphenol 8270 2,4-D; 2,4-Dichlorophen- 94-75-7 oxyacetic 72-54-8 acid 72-55-9 4,4 ¹ -DDD 72-55-9 4,4 ¹ -DDT 50-29-3 0x800 0.1 4,4 ¹ -DDT 50-29-3 8080 0.1 10 50-29-3 10 8270 10 10 11 2303-16-4 12 8270 10 10 132-64-9 8100 10 10 10 10 11 11 12 12 132-64-9 8100 10 10 10 10 11 11 11 11 11 11 11 11 11 11 11 11 11 11 11 11 11 11 11 11 11 11				
2, 4-D; 2, 4-Dichlorophen- oxyacetic 94-75-7 72-54-8 10 acid 72-55-9 8080 0.05 4, 4 ¹ -DDD 72-55-9 8080 0.1 4, 4 ¹ -DDT 50-29-3 8080 0.1 biallate 53-70-3 8270 10 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibromochloromethane; 124-48-1 8270 1 Chlorodibromomethane 8010 5		100-44-5		TO
oxyacetic 72-54-8 0.1 acid 72-55-9 8080 0.05 4,4 ¹ -DDE 72-55-9 8080 0.1 4,4 ¹ -DDT 50-29-3 8080 0.1 biallate 2303-16-4 8080 10 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibenzofuran 132-64-9 8100 10 Dibromochloromethane; 8270 0.3 8010 5		01-75-7	6270	10
acid 8150 10 4,4 ¹ -DDD 72-55-9 8080 0.05 4,4 ¹ -DDT 50-29-3 8080 0.1 4,4 ¹ -DDT 50-29-3 8080 0.1 biallate 2303-16-4 8080 10 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibenzofuran 124-48-1 8270 1 Dibromochloromethane; 8010 5 5		1 -		_
$4, 4^1 - DDD$ $72 - 55 - 9$ 8080 0.05 $4, 4^1 - DDE$ $50 - 29 - 3$ 8080 0.1 $4, 4^1 - DDT$ $50 - 29 - 3$ 8080 0.1 $4, 4^1 - DDT$ $2303 - 16 - 4$ 8270 10 $Diallate$ $53 - 70 - 3$ 8270 200 $Dibenz[a, h] anthracene132 - 64 - 9810010Dibenzofuran124 - 48 - 182701Dibromochloromethane;80105Chlorodibromomethane80215$	-	12 54 0	8150	• • =
4,4 ¹ -DDE 8270 10 4,4 ¹ -DDT 50-29-3 8080 0.1 4,4 ¹ -DDT 2303-16-4 8080 10 Diallate 53-70-3 8270 200 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibenzofuran 124-48-1 8270 1 Dibromochloromethane; 8010 5 Chlorodibromomethane 8021 5		72-55-9		
50-29-3 8080 0.1 4,4 ¹ -DDT 2303-16-4 8270 10 Diallate 53-70-3 8270 200 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibenzofuran 124-48-1 8270 1 Dibromochloromethane; 8010 5				
4,4 ¹ -DDT 8270 10 Diallate 2303-16-4 8080 10 Dibenz[a,h]anthracene 53-70-3 8270 200 Dibenzofuran 132-64-9 8100 10 Dibromochloromethane; 8270 0.3 8010 5 Chlorodibromomethane 8021 5 5	· · · · · · · · · · · · · · · · · · ·	50-29-3		
Diallate 2303-16-4 8080 10 Dibenz[a,h]anthracene 53-70-3 8270 200 Dibenzofuran 132-64-9 8100 10 Dibromochloromethane; 124-48-1 8270 1 Chlorodibromomethane 8010 5	$4 \cdot 4^{1} - DDT$		1	
Diallate 53-70-3 8270 200 Dibenz[a,h]anthracene 132-64-9 8100 10 Dibenzofuran 124-48-1 8270 1 Dibromochloromethane; 8010 5 Chlorodibromomethane 8021	.,	2303-16-4	1	
Dibenz[a,h]anthracene 8270 10 132-64-9 8100 10 Dibenzofuran 124-48-1 8270 1 Dibromochloromethane; 8010 5 Chlorodibromomethane 8021 8021	Diallate	1		
132-64-9 8100 10 Dibenzofuran 124-48-1 8270 1 Dibromochloromethane; 8270 0.3 8010 5 Chlorodibromomethane 8021 5 1				
Dibenzofuran 124-48-1 8270 1 Dibromochloromethane; 8270 0.3 8010 5 Chlorodibromomethane 8021 8021 5		132-64-9		10
Dibromochloromethane; 8270 0.3 8010 5 Chlorodibromomethane 8021	Dibenzofuran		8270	ł
80105Chlorodibromomethane8021				0.3
			8010	5
	Chlorodibromomethane		8021	
			8260	

.

EXPANDED PARAMETERS¹

	NDED PARAMETER		
Common Name ²	CAS RN ³	Suggested	PQL ⁵
		Methods ⁴	(µg/l)
1,2-Dibromo-3-chloro- propane; DBCP	96-12-8	8011 8021	0.1 30
1,2-Dibromoethane; Ethylene dibromide; EDB.	106-93-4	8260 8011 8021	25 0.1 10
Di-n-butyl phthalate o-Dichlorobenzene;	84-74-2	8260 . 8060	5 5 10
1,2-Dichlorobenzene	95-50-1	8270 8010	2
		8020 8021 8120	0.5
<pre>m-Dichlorobenzene; 1,3-Dichlorobenzene</pre>	541-73-1	8260 8270 8010	10 5 5
		8020 8021 8120	0.2 10 5
p-Dichlorobenzene; 1,4-dichlorobenzene	106-46-7	8260 8270 8010	10 2 5
		8020 8021 8120	0.1 15 5
3,3 ¹ -Dichlorobenzidine trans-1,4-Dichloro- 2-butene	91-94-1	8260 8270 8270	10 20
Dichlorodifluoromethane; CFC	110-57-6 75-71-8	8260	100 0.5
12 1,1-Dichloroethane; Ethyldidene chloride	75-34-3	8021 8260 8010	5 1 0.5
1,2-Dichloroethane; Ethylene dichloride	107-06-2	8021 8260 8010	5 0.5 0.3
<pre>1,1-Dichloroethylene; 1,1-Dichloroethene; Vinylidene</pre>	75-35-4	8021 8260 8010	5 1 0.5
<pre>chloride cis-1,2-Dichloroethylene; cis-1,2-Dichloroethene</pre>	156-59-2	8021 8260 8021	5 0.2 5
trans-1,2-Dichloroethylene trans-1,2-Dichloroethene	156-60-5	8260 8010	1 0.5
2,4-Dichlorophenol	120-83-2	8021 8260 8040	5 5 10
		8270	

EXPANDED PARAMETERS¹

F

Í

ſ

.

EXPANDED PARAMETERS ¹					
Common Name ²	CAS RN ³	Suggested	PQL ⁵		
		Methods ⁴	(µg/l)		
2,6-Dichlorophenol	87-65-0	8270	10		
1,2-Dichloropropane;	78-87-5	8010	0.5		
Propylene		8021	0.05		
dichloride		8260	5		
1,3-Dichloropropane;	142-28-9	8021	0.3		
Trimethylene dichloride.		8260	5		
2,2-Dichloropropane;	594-20-7	8021	0.5		
Isopropylidene		8260	15		
chloride.	563-58-6	8021	0.2		
1,1-Dichloropropene		8260	5		
cis-1,3-Dichloropropene	10061-01-5	8010	20		
CIS 1/S BIGHIOIOPIOPENEIII		8260	10		
trans-1,3-Dichloropropene.	10061-02-6	8010	5		
cluis 175 bientoropropenet		8260	10		
Dieldrin	60-57-1	8080	0.05		
Dicidiim		8270	10		
Diethyl phthalate	84-66-2	8060	5		
Dictingi phenaiace	01 00 2	8270	10		
0,0-Diethyl 0-2-pyrazinyl	297-97-2	8141	5		
phosphorothioate;	201 01 2	8270	20		
phosphorocatouce,					
Thionazin	60-51-5	8141	3		
Dimethoate		8270	20		
p-(Dimethylamino)azo-					
benzene	60-11-7	8270	10		
7,12-Dimethylbenz[a]-		1			
	57-97-6	8270	10		
anthracene	119-93-7	8270	10		
3,3 ¹ -Dimethylbenzidine	105-67-9	8040	5		
2,4-Dimethylphenol;		8270	10		
m-Xylenol	131-11-3	8060	5		
Dimethyl phthalate		8270	10		
m-Dinitrobenzene	99-65-0	8270	20		
4,6-Dinitro-o-cresol 4,6-	534-52-1	8040	150		
Dinitro-2-		8270	50		
methylphenol	51-28-5	8040	150		
2,4-Dinitrophenol		8270	50		
2,4-Dinitrotoluene	121-14-2	8090	0.2		
		8270	10		
2,6-Dinitrotoluene	606-20-2	8090	0.1		
2,5 Dimitiotordene		8270	10		
Dinoseb; DNBP; 2-sec-	88-85-7	8150	1		
Butyl-4,6-dinitrophenol.		8270	20		
Di-n-octyl phthalate	117-84-0	8060	30		
DI-H-OCCYI PHEMATACE	11, 04 0	8270	10		

EXPANDED PARAMETERS¹

Û

6

EXPANDED PARAMETERS					
Common Name ²	CAS RN ³	Suggested	PQL ⁵		
		Methods ⁴	(µg/l)		
Diphenylamine	122-39-4 298-04-4	8270 8140	10 2		
Disulfoton	298-04-4	8140	0.5		
Endosulfan I	959-98-8	8270 8080	10 0.1		
Endosulfan II	929-90-0	8270	20		
Endosulfan sulfate	33213-65-9	8080 8270	0.05 20		
Endosulian sullace	1031-07-8	8080	0.5		
Endrin aldehyde	72-20-8	8270 8080	10		
Ethylbenzene		8270	20		
	7421-93-4	8080	0.2		
Ethyl methacrylate	100-41-4	8270	2		
Ethyl methanesulfonate		8020 8221	0.05		
Famphur	97-63-2	8260	5		
Fluoranthene	·	8015 8260	10 10		
Fluorene	62-50-0	8270	20		
Heptachlor	52-85-	8270	20 200		
-	206-44-0	8270	10		
Heptachlor epoxide	86-73-7	8100 8270	200 10		
Hexachlorobenzene		8100	0.05		
Hexachlorobutadiene	76-44-8	8270 8080	10		
	1024-57-3	8270	10		
Hexachlorocyclopentadiene.	118-74-1	8080 8270	0.5		
		8120	0.5		
Hexachloroethane	87-68-3	8270 8021	10		
	77 47 4	8120	10		
Hexachloropropene	77-47-4	8260 8270	10		
2-Hexanone; Methyl butyl	67 70 1	8120	0.5		
ketone	67-72-1	8270 8120	10		
Indeno(1,2,3-cd)pyrene	1888-71-7	8260 8270	10		
	1008-/1-/	8270	50		
	591-78-6 193-39-5	8260	200 10		
	T32-23-2	8100			
		8270			

EXPANDED PARAMETERS¹

Î

EXPANDED PARAMETERS'			
Common Name ²	CAS RN3	Suggested	PQL ⁵
		Methods ⁴	(µg/l)
Isobutyl alcohol	78-83-1	8015 8240	50 100
Isodrin	465-73-6	8270 8260	20 10
Isophorone	78-59-1	8090 8270	60 10
Isosafrole	120-58-1	8270	10
Kepone	143-50-0	8270	20 5
Methacrylonitrile	126-98-	8015 8260	100
Methapyrilene	,	8270	100
Methoxychlor	91-80-5	8080	2
-	72-43-5	8270	10
Methyl bromide;		8010	20
Bromomethane	74-83-9	8021	10
Methyl chloride;	74-87-3	8010 8021	1 0.3
Chloromethane	/4-8/-5	8270	10
3-Methylcholanthrene	56-49-5	8015	10
Methyl ethyl ketone; MEK;	78-93-3	8260	100
2-Butanone		8010	40
Methyl iodide; Iodomethane	74-88-4	8260	10
-		8015	2
Methyl methacrylate	80-62-6	8260	30
		8270	10
Methyl methanesulfonate	66-27-3	8270	10
2-Methylnaphthalene Methyl parathion;	91-57-6 298-00-0	8140 8141	
Parathion	200 00 0	8270	10
methyl		8015	5
4-Methyl-2-pentanone;	108-10-1	8260	100
Methyl isobutyl ketone		8010	15
Methylene bromide;	74-95-3	8021	20
		8260	10
Dibromomethane		8010	5
Methylene chloride;	75-09-2	8021	0.2
Dichloromethane		8260 8021	0.5
Naphthalene	91-20-3	8100	200
naprenaterie		8260	5
		8270	10
		8270	10
1,4-Naphthoquinone	130-15-4		10
1-Naphthylamine	134-32-	8270	10
2-Naphthylamine	7	8270	
o-Nitroaniline;	91-59-8	0.070	50
2-Nitroaniline	88-74-4	8270	

.

EXPANDED PARAMETERS¹

Ó

EXPA	NDED PARAMETER	.S	
Common Name ²	CAS RN3	Suggested	PQL ⁵
		Methods ⁴	(µg/l)
		meenous	
m-Nitroaniline;			
3-Nitroanile	99-09-2	8270	50
p-Nitroaniline;			
-	100-01-6	8270	20
4-Nitroaniline	98-95-	8090	40
Nitrobenzene	3	8270	10
	88-75-5	8040	5
o-Nitrophenol;		8270	10
2-Nitrophenol	100-02-7	8040	10 50
p-Nitrophenol;	004 16 2	8270	10
4-	924-16-3 55-18-	8270 8270	20
Nitrophenol	5	8070	20
N-Nitrosodi-n-butylamine	62-75-9	8070	5
N-Nitrosodiethylamine N-Nitrosodimethylamine	86-30-6	0070	
N-Nitrosodiphenylamine	00 50 0		
N-Nitrosodipropylamine;			
N-Nitroso-N-dipropyl-		8070	10
amine; Di-n-propylni-	621-64-7	8270	10
	10595-95-6	8270	20
trosamine	100-75-4	8270	40
N-Nitrosomethylethalamine.	930-55-2	8270	10
N-Nitrosopiperidine	99-55-	8141	0.5
N-Nitrosopyrrolidine	8	8270	10
5-Nitro-o-toluidine	56-38-2	8270	10
Parathion		8270	20
	608-93-5 82-68-8	8040 8270	50
Pentachlorobenzene	87-86-	8270	20
Pentachloronitrobenzene Pentachlorophenol	5	8100	200
rentachiorophenor	5	8270	10
Phenacetin	62-44-2	8040	1
Phenanthrene	85-01-8	8270	10
		8140	2
Phenol	108-95-2	8141	0.5
p-Phenylenediamine	106-50-3	8270	10
Phorate	298-02-2	8080	50
		8270	200
		8280	0.01
Polychlorinated biphenyls;	See Note 11		
PCB's; Aroclors		8280	0.01
Polychlorinated dibenzo-p-	See Note 12		1.0
dioxins; PCDD's		8270	10
Polychlorinated dibenzo-	See Note 13	8015	60 150
furans; PCDF's	23950-58-5	8260 8100	200
Pronamide	107-12-	8100	10
Propionitrile;	0	0270	
Ethyl cyanide			
Pyrene	129-00-0		
- <u>-</u> <u>-</u> <u>-</u> <u>-</u> <u>-</u> <u>-</u> <u>-</u> <u>-</u> <u>-</u> <u>-</u>	120 00 0		
	1	<u> </u>	1

EXPANDED PARAMETERS¹

F

ľ

•

EXPANDED PARAMETERS					
Common Name ²	CAS RN3	Suggested	PQL ⁵		
		Methods ⁴	(µg/l)		
Safrole Silvex; 2,4,5-TP Styrene	94-59-7 93-72-1 100-42- 5	8270 8150 8020 8021 8260	10 2 1 0.1 10		
2,4,5-T; 2,4,5-trichloro- phenoxyacetic acid 1,2,4,5-Tetrachlorobenzene 2,3,7,8-Tetrachlorodi- benzo-p-dioxin;	93-76-5 95-94-3	8150 8270	2 10		
2,3,7,8-TCDD 1,1,1,2-Tetrachloroethane.	1746-01-6 630-20-	8280 8010 8021 8260	0.005 5 0.05 5		
1,1,2,2-Tetrachloroethane.	79-34-5	8010 8021 8260 8010	0.5 0.1 5 0.5		
Tetrachloroethylene; Tetrachloroethene; Perchloroethylene	127-18-4	8010 8021 8260 8270	0.5 0.5 5 10		
2,3,4,6-Tetrachlorophenol. Toluene	58-90-2 108-88- 3	8020 8021 8260 8270	2 0.1 5 10		
o-Toluidine Toxaphene 1,2,4-Trichlorobenzene	95-53-4 See Note 14 120-82- 1	8080 8021 8120 8260 8270 8010	2 0.3 0.5 10 10 0.3		
<pre>1,1,1-Trichloroethane; Methylchloroform 1,1,2-Trichloroethane</pre>	71-55-6	8021 8260 8010 8260	0.3 5 0.2 5		
Trichloroethylene; Trichloroethene	79-00-5	8010 8021 8260	1 0.2 5		
Trichlorofluoromethane;	79-01-6	8010 8021	10 0.3		
CFC-11 2,4,5-Trichlorophenol	75-69-4	8260 8270 8040	5 10 5		
2,4,6-Trichlorophenol 1,2,3-Trichloropropane	95-95-4 88-06-2	8270 8010 8021	10 10 5		
1,2,5 IIICHIOLOPIOPAHE	96-18-4	8260	15		

EXPANDED PARAMETERS¹

Ø

1

EXPANDED PARAMETERS				
Common Name ²	CAS RN ³	Suggested	PQL ⁵	
		Methods ⁴	(µg/l)	
0,0,0-Triethyl phosphoro- thioate sym-Trinitrobenzene Vinyl acetate Vinyl chloride; Chloroethene Xylene (total)	126-68-1 99-35-4 108-05-4 75-01- 4 See Note 15	8270 8270 8260 8010 8021 8260 8020 8021 8260	10 10 50 2 0.4 10 5 0.2 5	

EXPANDED PARAMETERS¹

P

The department may modify this list as necessary.

EXPANDED PARAMETERS¹

Notes

 1 The regulatory requirements pertain only to the list of substances; the right hand columns (Methods and PQL) are given for informational purposes only. See also footnotes 5 and 6.

²Common names are those widely used in government regulations, scientific publications, and commerce; synonyms exist for many chemicals.

³Chemical Abstracts Service registry number. Where "Total" is entered, all species in the groundwater that contain this element are included.

⁴Suggested Methods refer to analytical procedure numbers used in EPA Report SW-846 Test Methods for Evaluating Solid Waste, third edition, November 1986, as revised, December 1987 and Methods for Chemical Analysis of Water and Wastes, USEPA-600-4/79-020, March, 1979. CAUTION: The methods listed are representative procedures and may not always be the most suitable method(s) for monitoring an analyte under the regulations.

⁵Practical Quantitation Limits (PQLs) are the lowest concentrations of analytes in groundwaters that can be reliably determined within specified limits of precision and accuracy by the indicated methods under routine laboratory operating conditions. The PQLs listed are generally stated to one significant figure. PQLs are based on 5 ml samples for volatile organics and 1 L samples for semivolatile organics. CAUTION: The PQL values in many cases are based only on a general estimate for the method and not on a determination for individual compounds; PQLs are not a part of the regulation.

⁶Any floaters or sinkers found must be analyzed separately for baseline parameters.

'Surface water only.

⁴Any unusual conditions (colors, odors, surface sheens, etc.) noticed during well development, purging, or sampling must be reported.

'This substance is often called Bis(2-chloroisopropyl) ether, the name Chemical Abstracts Service applies to its noncommercial isomer, Propane, 2,2"-oxybis(2-chloro- (CAS RM 39638-32-9).

¹⁰Chlordane: This entry includes alpha-chlordane (CAS RN 5103-71-9), beta-chlordane (CAS RN 5103-74-2), gamma-chlordane (CAS RN 5566-34-7), and constituents of chlordane (CAS RN 57-74-9 and CAS RN 12789-03-6). PQL shown is for technical chlordane. PQLs of specific isomers are about 20 µg/l by method 8270.

¹¹Polychlorinated biphenyls (CAS RN 1336-36-3): This category contains congener chemicals, including constituents of Aroclor 1016 (CAS RN 12674-11-2), Aroclor 1221 (CAS RN 11104-28-2), Aroclor 1232 (CAS RN 11141-16-5), Aroclor 1242 (CAS RN 53469-21-9), Aroclor 1248 (CAS RN 12672-29-6), Aroclor 1254 (CAS RN 11097-69-1), and Aroclor 1260 (CAS RN 11096-82-5). The PQL shown is an average value for PCB congeners.

¹²Polychlorinated dibenzo-p-dioxins: This category contains congener chemicals, including tetrachlorodibenzo-pdioxins (see also 2,3,7,8-TCDD), pentachlorodibenzo-p-dioxins, and hexachlorodibenzo-p-dioxins. The PQL shown is an average value for PCDD congeners. Upon request of the applicant, the department may waive the requirement to analyze for dioxins, where appropriate.

¹³Polychlorinated dibenzofurans: This category contains congener chemicals, including tetrachlrodibenzofurans, pentachlorodibenzofurans, and hexachlorodibenzofurans. The PQL shown is an average value for PCDF congeners. Upon request of the applicant, the department may waive the requirement to analyze for furans, where appropriate.

¹⁴Toxaphene: This entry includes congener chemicals contained in technical toxaphene (CAS RN 8001-35-2), i.e., chlorinated camphene.

¹⁵Xylene (total): This entry includes o-xylene (CAS RN 96-47-6), m-xylene (CAS RN 108-38-3), p-xylene (CAS RN 106-42-3), and unspecified xylenes (dimethylbenzenes) (CAS RN 1330-20-7). PQLs for method 8021 are 0.2 for o-xylene and 0.1 for m- or p-xylene. The PQL for m-xylene is 2.0 µg/L by method 8020 or 8260.

"The department may waive the requirement to analyze Hexavalent Chromium provided that Total and Hexavalent and

Methods, Detection Limits, and Chemical Abstract Service Numbers

•

Methods, Detection Limits,	and Unemittar input.		(`m
Barameter	Method	Let. Limit CAS#	
Static Water Level	7/150 11	2 3 12 500	
pH	E(150.1)	2.0-12.5SU	1
Temperature	E(170.1)	1umhos/cm	
Field Specific Conductivity	E(120.1)		×
Field Turbidity	E(180.1)	0.02NTU	i per
Field Eh	7/000 11	1 /7	
Field Dissolved Oxygen	E(360.1)	1mg/1	a\$27.5125-
BOD5	E(405.1)	2mg/1	1
Nitrate-Nitrogen	E(353.1)	0.2 mg/1	and a second
Hexavalent Chromium	SM14(307B)	0.10 mg/1	
Turbidity	E(180.1)	0.02NTU	
Total Alkalinity	E(310.2)	10mg/1CaCO3	i jere
Color	E(110.2)	1Unit	
Total Dissolved Solids	E(160)	1mg/1	Cim
Sulfate	E(375.4)	5mg/1	
Chloride	E(325.3)	1mg/1	\$ 1.64
Total Kjeldahl Nitrogen	E(351.2)	0.5 mg/1	8 mm
Ammonia-Nitrogen	E(350.1)	0.5mg/1	
TOC	E(415.1)	1mg/1	C.
COD	Hach(8000)	20mg/1	atorio.
Calculated Hardness	EPA(200.7)		e 🚺
Total Cyanide	E(335.2)	0.01mg/1 57-12-	16. Balance
Total Phenols	E(420.1)	0.005mg/1 108-95	
Total Boron	EPA(212.3)	0.1mg/1 7440-4	2
Total Aluminum	EPA(200.7)	0.5mg/1 7429-9	-0-5
Dissolved Aluminum	EPA(200.7)	0.5mg/1	
Total Antimony by furnace method	E(204.2)	0.003mg/1 7440-3	-00
Dissolved Antimony by furnace method	E(204.2)	0.003mg/1 0.001mg/1 7440-3	
Total Arsenic by furnace method	E(206.2)		30-∠ °₩
Dissolved Arsenic by furnace method	E(206.2)	0.001 mg/l	20 2 🖳
Total Barium	EPA(200.7)	0.3mg/1 7440-3	59-5
Dissolved Barium	EPA(200.7)	0.3 mg/1	41 7
Total Beryllium	EPA(200.7)	0.005mg/1 7440-4	77-1
Dissolved Peryllium	EPA(200.7)	0.005mg/1 0.005mg/1 7440-4	42 0
Total Cadmium	EPA(200.7)		±0-3
Dissolved Cadmium	EPA(200.7)	0.005 mg/l	70.2
Total Calcium	EPA(200.7)	0.05mg/1 7440-'	10-2
Dissolved Calcium	EPA(200.7)	0.05mg/1 0.05mg/1 7440-4	47.3
Total Chromium	EPA(200.7)		41-0
Dissolved Chromium	EPA(200.7)	0.05 mg/1	50_9
Total Copper	EPA(200.7)	0.02mg/1 7440-	50-0
Dissolved Copper	EPA(200.7)	0.02mg/1 0.03mg/1 7439-4	90_£
Total Iron	EPA(200.7)		55-0
Dissolved Iron	EPA(200.7)	0.03mg/1 0.001mg/1 7439-9	02-1
Total Lead by furnace method	E(239.2)		52-1 🦷
Dissolved Lead by furnace method	E(239.2)	0.001 mg/l	05_4
Total Magnesium	EPA(200.7)	0.05mg/1 7439-9	27-2
Dissolved Magnesium	EPA(200.7)	0.05 mg/1 0.02 mz/1 7439-0	06-5
Total Manganese	EPA(200.7)	0.02 mg/1 7439-1	
Dissolved Manganese	EPA(200.7)	0.02mg/1 0.0004mg/1 7439-5	97-6
Total Mercury	E(245.1)		21-0
Dissolved Mercury	E(245.1)	0.0004mg/1	
			Marco By

Page 2 of 6

•

	-		
Total Nickel	EPA(200.7)	0.03 mg/l	7440-02-0
Dissolved Nickel	EPA(200.7)	0.03 mg/1	1-1-0-02-0
Total Potassium	E(258.1)	0.05 mg/1	7440-09-7
Dissolved Potassium	E(258.1)	0.05 mg/1	1440-03-1
Total Selenium by furnace method	E(238.1) E(270.2)	-	7782-49-2
-	•	0.001 mg/l	1102-49-2
Dissolved Selenium by furnace method	E(270.2)	0.001 mg/l	7440 00 4
Total Silver	EPA(200.7)	0.05 mg/1	7440-22-4
Dissolved Silver	EPA(200.7)	0.05 mg/1	7440 02 5
Total Sodium	E(273.1)	0.5 mg/1	7440-23-5
Dissolved Sodium	E(273.1)	0.5 mg/1	7440 00 0
Total Thallium by furnace method	E(279.2)	0.003 mg/1	7440-28-0
Dissolved Thallium by furnace method	E(279.2)	0.003 mg/1	.
Total Zinc	EPA(200.7)	0.01 mg/l	7440-66-6
Dissolved Zinc	EPA(200.7)	0.01 mg/l	
EPA 601			
Bromodichloromethane	E(601)	1ug/1	75-27-4
Bromoform	E(601)	lug/l	75-25-2
Bromomethane	E(601)	1ug/1	74-83-9
Carbon Tetrachloride	E(601)	1ug/1	56-23-5
Chlorobenzene	E(601)	1ug/1	108-90-7
Chloroethane	E(601)	lug/l	75-00-3
2-Chloroethylvinyl Ether	E(601)	1ug/1	100-75-8
Chloroform	E(601)	lug/l	67-66-3
Chloromethane	E(601)-	lug/l	74-87-3
Dibromochloromethane	E(601)	1 ug/l	124-48-1
1,2-Dichlorobenzene	E(601)	lug/l	95-50-1
1,3-Dichlorobenzene	E(601)	lug/l	541-73-1
1,4-Dichlorobenzene	E(601)	1 ug/l	106-46-7
Dichlorodifluoromethane	E(601)	lug/l	75-71-8
1,1-Dichloroethane	E(601)	lug/l	75-34-3
1.2-Dichloroethane	E(601)	lug/l	107-06-2
1,1-Dichloroethene	E(601)	lug/l	75-35-4
trans-1,2-Dichloroethene	E(601)	lug/l	156-60-5
1,2-Dichloropropane	E(601)	lug/l	78-87-5
cis-1,3-Dichloropropene	E(601)	lug/l	10061-01-5
trans-1,3-Dichloropropene	E(601)	lug/l	10061-02-6
Methylene Chloride	E(601)	1 ug/1	75-09-02
1,1,2,2-Tetrachloroethane	E(601)	lug/l	79-34-5
Tetrachloroethene	E(601)	lug/l	127-18-4
1.1.1-Trichloroethane	E(601)	lug/l	71-55-6
	E(601)	-	79-00-5
1,1,2-Trichloroethane	E(601) E(601)	lug/l	79-01-6
Trichloroethene	-	lug/l	79-69-4
Trichlorofluoromethane	E(601)	lug/l	75-01-4
Vinyl Chloride	E(601)	1ug/1	10-01-4

•

.

.

Í

.

.

-

Page 3 of 6

		_	~	
EPA 602				
Benzene	E(602)	1ug/1	71-43-2	
Chlorobenzene	E(602)	1 ug/1	108-90-7 🛛 🍟	
1,2-Dichlorobenzene	E(602)	lug/l	95-50-1	
1,3-Dichlorobenzene	E(602)	lug/l	541-73-1	
1,4-Dichlorobenzene	E(602)	lug/l	106-46-7	
Ethylbensene	E(602)	lug/l	100-41-4	
Toluene	E(602)	lug/l	108-88-3	
m-Xylene	E(602)	1ug/1	108-38-3	
p-Xylene	E(602)	1 ug/1	106-42-3	
o-Xylene	E(602)	lug/l	95-47-6	
EPA 624			74 07 0	
Chloromethane	E(624)	3ug/1	74-87-3	í –
Bromomethane	E(624)	3ug/1	74-83-9	_
Vinyl Chloride	E(624)	3ug/1	75-01-4	
Chloroethane	E(624)	3ug/1	75-00-3	- Configuration
Methylene Chloride	E(624)	3ug/1	75-09-2	
Trichlorofluoromethane	E(624)	3ug/l	75-69-4	
1,1-Dichloroethylene	E(624)	3ug/l	75-35-4	
t-1,2-Dichloroethylene	E(624)	3ug/l	156-60-5	•
1,1-Dichloroethane	E(624)	3ug/l	75-34-3 🎧	a.
Chloroform	E(624)	3ug/1	67-66-3	
1,2-Dichloroethane	E(624)	3ug/1	107-06-2	
1,1,1-Trichloroethane	E(624).	3ug/1	71-55-6	
Benzene	E(624)	3ug/1	71-43-2	
Carbon Tetrachloride	E(624)	3ug/1	56-23-5 📲	
1,2-Dichloropropane	E(624)	3ug/1	78-87-5	
Bromodichloromethane	E(624)	3ug/1	75-27-4	
Trichloroethylene	E(624)	3ug/1	79-01-6	
c-1,3-Dichloropropropene	E(624)	3ug/1	10061-01-5	
t-1, 3-Dichloropropropene	E(624)	3ug/1	10061-02-6	
1,1,2-Trichloroethane	E(624)	Jug/1	79-00-5	相影
Toluene	E(624)	Jug/1	108-88-3	
Dibromochloromethane	E(624)	3ug/1	124_48_1	256
Tetrachloroethylene	E(624)	Jug/1	127-18-4	
	E(624)	3ug/1	110-75-8	
2-Chlorcethylvinyl Ether	E(624)	3ug/1	108-90-7	
Chlorobenzene	E(624)	3ug/1	100-41-4	
Ethylbenzene	E(624)	3ug/1	75-25-2	10.0
Bromoform	E(624) E(624)	3ug/1	79-34-5	
1,1,2,2-Tetrachloroethane		3ug/1		T
1,2-Dichlorobenzene	E(624)		95-50-1 541-73-1	
1,3-Dichlorobenzene	E(624)	3ug/1	106-46-7	y di tati
1,4-Dichlorobenzene	E(624)	3ug/1	1330-20-7	
Total Xylenes	E(624)	3ug/1	1000-20-1	
			\$	

8 to 4 speq

٠

9-68-e6t	I/SuDI	E(932)	
8-26-05	T/Bug	E(625)	ECUEC(U) LALGUG
6-80-702	T/Bug	E(625)	Benzo(k)Fluoranthene
2-66-902	T/Eng	E(625)	Benzo(b)Fluoranthene
117-84-0	T/Bug	E(822)	Di-n-octyl Fhithalate
7-18-711	T/Sug	E(822)	Bis(2-ethylhexyl)Fithalate
2-22-99	T/Bng	E(625)	ensogration (p) caned
518-01-6	T/Sng	E(822)	Chrysene
1-76-16	T/Sing	E(625)	5,5-Dichlorobenzidine
7-89-28	T/Sing	E(625)	Butyl Fenryl Futhalate
0-00-621	T/Eng	E(622)	Fyrene
9-78-26	T/Bng	E(622)	Benzidine
506-44-0	T/ang	E(625)	Fluoranthene
2-47-48	T/Sng	E(625)	Di-n-butyl Fithalate
•	T/Bug	E(622)	Anthracene
150-17-4 15-01-8	T/Eng	E(622)	Fhenanthrene
-	T/Bud	E(622) E(622)	Нехасплоторелзелье
1-47-811	T/Bug	E(622)	4-Bronophenylphenyl Ether
101-22-3		E(625)	N-Nitrosodiphenylamine
9-02-98	T/Suc	E(625) E(622)	4-Chlorophenylphenyl Ether
2005-72-3	T/2003		Diethyl Phthalate
2-99-48	T/Bug	E(625)	Fluorene
7-57-38	T/2005	E(625)	2,4-Dinitrotoluene
121-14-2	1/aug	E(625)	
6-26-68	T/Buc	E(625)	Acenaphthene
2-02-909	518/J	E(625)	2,6-Dinitrotoluene
208- 96 -8	I/aug	E(625)	Acenaphthylene
131-11-2	1/Bug	E(625)	Dimethylphthalate
7-58-Te	T/Bug	E(625)	S-Chlororaphthalene
ヤームヤームム	I/Buč	E(625).	Hexachlorocyclopentadiene
5-89-78	T/Bud	E(625)	Hexachlorobutadiene
6-02-16	1/Bud	E(625)	Saphthalene
1-28-021	T/Bud	E(625)	<pre>snsensdoroIdptrT-4.5.1</pre>
I-I6-III	T/Buc	E(625)	Bis(2-chloroethoxy)Methane
1-69-84	T/Bud	E(625)	90010402I
2-79-129	T/Euc	E(622)	enimelygorgibozortiN-N
2-96-86	T/ang	E(625)	Supersense of the series of th
1-27-78	T/Bug	E(625)	Hexachloroethane
1-09-801	T/Eng	E(C22)	Bis(2-chloroisopropy)Ether
1-09-96	T/Bng	E(625)	suscederoldoid-S,1
2-97-901	T/Buc	E(832)	f.4-Dichlorobensene
I-EL-IDG	T/Bud	E(629)	1, 3-Dichlorobenzene
	T/Sng	E(622)	Bis(2-chloroethyl)Ether
9-98-28	1/2001	E(625)	Pentachlorophenol
1-29-469	T/Subs	E(625)	2-Methyl-4,6-Dinitrophenol
7-20-001	T/anng	E(625) E(625)	4-Nitrophenol
2-82-19	T/2003	E(625)	2,4-Dinitrophenol
2-90-88 3-86-63	T/Bud	E(625)	2,4,6-Trichlorophenol
		E(625) E(622)	4-Chloro-3-Methylphenol
L-09-69	T/Suc	E(625) E(625)	2,4-Dichlorophanol
120-83-2	T/Buc	(629)E	2,4-Dimethylphenol
6-29-901	I/BUG		2-4-Discrete indication
6-75-88	T/Sug	E(625) E(625)	2-Cilorophenol
8-72-26	T/Eng	E(625)	
108-95-2	T/Buč	E(932)	Lonard Lonard
	•		629 Va

E(622)

E(622)

E(625)

161-34-3

23-70-3

T/EngI

I/SnDI

I/Sn0I

34 M

Senco(ghi)Pervlene

SEA AGE

Dipenso(a, h) Anthracene

enervy(bo-6,2,1)ouebnI

Page 5 of 6

•

			•
		.•	
EPA 608			122
EHC (a-isomer)	E(608)	lug/l	319-84-6
BHC (g-isomer)	E(608)	lug/l	58-89-9
	E(608)	lug/l	319-85-7
BHC (b-isomer)			76-44-8
Heptachlor	E(608)	lug/l	
BHC (d-isomer)	E(608)	lug/l	319-86-8
Aldrin	E(608)	1ug/1	309-00-2
Heptachlor Epoxide	E(608)	10ug/l	1024-57-3
Endosulfan (a-isomer)	E(608)	lug/l	959-98-8
Dieldrin	E(608)	1 ug/1	60-57-1
•	E(608)	lug/l	72-55-9
4,4'-DDE			72-54-8
4,4'-DDD	E(608)	lug/l	
Endrin	E(608)	lug/l	72-20-8
Endosulfan (b-isomer)	E(608)	lug/l	33213-65-9
4,4 -DDT	E(608)	lug/l	50-29-3
Endrin Aldehyde	E(608)	3ug/1	7421-93-4
-	E(608)	10ug/1	1031-07-8
Endosulfan Sulfate	-		57-74-9
Chlordane	E(608)	3ug/1	
Toxaphene	E(608)	5ug/1	8001-35-2
Aroclor 1016	E(608)	lug/l	12674-11-2
Aroclor 1221	E(608)	1ug/1	11104-28-2
Aroclor 1232	E(608)	lug/l	11141-16-5
	E(608)	lug/l	53469-21-9
Aroclor 1242		_	12672-29-6
Aroclor 1248	E(608)	1ug/1	11097-69-1
Aroclor 1254	E(608).	1ug/1	
Aroclor 1260	E(608)	1ug/1	11096-82-5
1,2-Diphenylhydrazine	E(625)	5ug/1	meredi
N-Nitrosodimethylamine	E(625)	5ug/1	Γ.
•	E(625)	50ug/1	
Benzidine	E(023)	JUUE/ I	Urisoft.
	F(625)	10.00/1	
2,3,7,8-TCDD	E(625)	10ug/1	1
	Section 17		(
Bis(chloromethyl)Ether	E(624)	100ug/1	
			1
TCLP Arsenic	EPA(200.7)	0.5 mg/1	
	EPA(200.7)	0.3 mg/1	R. A. St. C.
TCLP Barium	-		
TCLP Cadmium	EPA(200.7)	0.005 mg/l	
TCLP Chromium	EPA(200.7)	0.05 mg/1	
TCLP Lead	EPA(200.7)	0.1mg/l	* - 🙀
TCLP Mercury	E(245.1)	0.0004 mg/1	×
TCLP Selenium	EPA(200.7)	0.5 mg/1	
	EPA(200.7)	0.05 mg/1	(Theorem
TCLP Silver	BLA(200.1)		
			Í 🛤
EPA 8270 (TCLP Semi-Volatiles)			
o-Cresol	E(8270)	50 ug/1	
m-Cresol	E(8270)	50ug/1	
p-Cresol	E(8270)	50ug/1	1
Nitrobenzene	E(8270)	50 ug/1	
•	E(8270)	100 kg/l	•
Pentachlorophenol		•	
Pyridine	E(8270)	50ug/1	
) 🖬

•

.

ł

.,

Page 6 of 6

		÷.
2,4,5-Trichlorophenol	E(8270)	50ug/1
2,4,6-Trichlorophenol	E(8270)	50 ug/1
2,4-Dinitrotoluene	E(8270)	50 ug/1
Hexachlorobenzene	E(8270)	50ug/1
Hexachlorobutadiene	E(8270)	50ug/1
Hexachloroethane	E(8270)	50 ug/1
	_(
EPA 8240 (TCLP Volatiles)		
Carbon Tetrachloride	E(8240)	30ug/1
Chlorobenzene	E(8240)	30ug/1
Methyl Ethyl Ketone	E(8240)	100ug/1
Tetrachloroethylene	E(8240)	30ug/1
Trichloroethylene	E(8240)	30ug/1
Benzene	E(8240)	30ug/1
Chloroform	E(8240)	30ug/1
1,2-Dichloroethane	E(8240)	30ug/1
1,1-Dichloroethylene	E(8240)	30ug/1
1,4-Dichlorobenzene	E(8240)	30 ug/1
Vinyl Chloride	E(8240)	30ug/1
ATTAL CUTOLIDE	E(024())	JUUE/ I
EPA 3150 (TCLP Herbicides)		
2.4-D	E(8150)	100 ug/1
2,4,5-TP	E(8150)	10ug/1
21310 12	2(0200)	1000
EPA 8080 (TCLP Pesticides)		
Chlordane	E(8080)	20 ug/1
Endrin	E(8080)	15ug/1
Heptachlor	E(8080)	6ug/1
Lindane	E(8080)	15ug/1
Methoxychlor	E(8080)	15ug/1
Toxaphene	E(8080)	50ug/1
Heptachlor Epoxide	E(8080)	6ug/1
HERMINI EKVINE	ECOOCI	Vvo/ +

The QA/QC protocols were followed according to the methods documented above.

Method Reference Key:

- SM14 = "Standard Methods for the Examination of Water and Wastewater," 14th Edition 1976.
- E = "Methods for Chemical Analysis of Water and Wastes," U.S. Environmental Protect Agency, EPA-600/4-79-020, March 1979.
- EPA = "Part VIII Environmental Protection Agency 40 CFR, Part 136, Guidelines Establishing Test Procedures for the Analysis of Pollutants Under the Clean Act; Final Rule and Interim Final Rule and Proposed Rule, October 26, 1984."

Hach = Hach Handbook of Water Analysis, 1979, Hach Chemical Corp.

GROUNDWATER ANALYTICAL DATA - INORGANIC AND METAL PARAMETERS

Parameter	Units	Class GA Standard	Class GA Guidance	
Sample Collection Date				
pH	S.U.	6.5-8.5		
Eh	m.volts			
Specific Conductivity	umho/cm			
Dissolved Oxygen	mg/l			
TKN	mg/l	-		
Ammonia	mg/l	2		
Nitrate	mg/l	10		
COD	mg/l			
BOD-5	mg/l			
TOC	mg/l	500		
Total Dissolved Soilds	mg/l			
Sulfate	mg/l	250		
Alkalinity	mg/l	0.001		
Phenols Chloride	mg/l	250		
Hardness	mg/l	214		
Turbidity	mg/l NTU			
Color	Color Units			
Boron	mg/l	1		
Total Cyanide	mg/l	0.1		
Potassium	mg/l	v		
Sodium	mg/l	20		
Iron	mg/l	0.3		
Iron (soluble)	mg/l	0.3		
Manganese	mg/l	0.3		
Manganese (soluble)	mg/l	0.3		
Magnesium	mg/l		35	
Lead	mg/l	0.025		
Cadmium	mg/l	0.01		
Aluminum	mg/l			
Calcium	mg/l			
Antimony	mg/l		0.003	
Arsenic	mg/l	0.025		
Beryllium	mg/l	0.003		
Barium	mg/l	1		
Total Chromium	mg/l	0.05		
Hexavalent Chromium	mg/l	0.05		
Copper	mg/l	0.2		
Mercury	mg/l	0.002		
Nickel	mg/i			
Selenium	mg/l	0.01		
Silver	mg/l	0.05		
Thallium	mg/l	0.004		
Zinc	mg/l	0.3		

GROUNDWATER ANALYTICAL DATA - VOLATILE ORGANIC PARAMETERS

ſ

P

		Class GA	Class GA
Parameter	Units	Standard	Guidance
Sample Collection Date			
EPA 601/602			
Benzene	ug/l	0.7	
Bromodichloromethane	ug/l	50	
Bromoform	ug/l		50
Bromomethane	ug/l	5	
Carbon Tetrachloride	ug/l	5	
Chlorobenzene	ug/l	5	
Chloroethane	ug/l	5	
2-Chloroethylvinylether	ug/l	5	
Chloroform	ug/l	7	
Chloromethane	ug/l	5	
Dibromochloromethane	ug/l		50
1,2-Dichlorobenzene	ug/l	5	
1,3-Dichlorobenzene	ug/l	5	
1,4-Dichlorobenzene	ug/l	4.7	
Dichlorofluoromethane	ug/l		
1,1-Dichloroethane	ug/l	5	
1,2-Dichloroethane	ug/l	5	
1,1-Dichloroethene	ug/l		
trans1,2-dichloroethene	ug/l		1
1,2-Dichloropropane	ug/l		50
cis-1,3-Dichloropropene	ug/l	5	
trans-1,3-Dichloropropene	ug/l	5	1
Ethylbenzene	ug/l	5	
Methylene Chloride	ug/l	5	1
1,1,2,2-Tetrachloroethane	ug/l	5	
Tetrachloroethene	ug/l	5	
Toluene	ug/l	5	1
1,1,1-Trichloroethane	ug/1	5	
1,1,2-Trichloroethane	ug/l	5	1
Trichloroethene	ug/l	5	
Trichlorofluoromethane	ug/l		
Vinyl Chloride	ug/l		1
Total-Xylene	ug/l	5	

Parameter	Units	Class C	Class C	
Sample Collection Date		Standard	Guidance	
Specific Conductance	umhos/cm			
Temperature	deg C			
pH	SU	6.5-8.5		
Eh	mV			
Turbidity	NTU			
TKN	mg/l			
Ammonia	mg/l			
Nitrate	mg/l			
COD	mg/l			
BOD	mg/l			
TOC	mg/l			
TDS	mg/l	500		
Sulfate	mg/l			
Alkalinity	mg/l			
Chloride	mg/l	-		
Phenols	mg/l	0.005		
Hardness	mg/l			
Color	CU			
Total Cyanide	mg/l	0.0052		
Boron	mg/l	10		
Antimony	mg/l			
Arsenic	mg/l			
Beryllium	mg/l	1		
Barium	mg/l			
Cadmium	mg/l	*		
Chromium	mg/l	**		
Hexavalent Chromium	mg/l	0.011		
Copper	mg/l	***		
Lead	mg/l	****		
Mercury	mg/l		0.0002	
Nickel	mg/l	****		
Selenium	mg/l	0.001		
Silver	mg/l	0.0001		
Thallium	mg/l	0.008		
Zinc	mg/l	0.3		
Potassium	mg/l			
Sodium	mg/l			1
Iron	mg/l	0.3		
Manganese	mg/l			
Magnesium	mg/l			
Aluminum	mg/l			
Calcium	mg/l			

Surface Water Analytical Data - Baseline Parameters

* exp(0.7852 {ln (hardness)}-3.490 ** exp(0.819 {ln (hardness)}+1.561 *** exp(0.8545 {ln (hardness)}-1.465 **** exp(1.266 {ln (hardness)}-4.661 ***** exp(0.76 {ln (hardness)+1.06

<u>___</u>

GENERAL.WK4

Surface Water Analytical Data - Organic Parameters

6

Π

		Class C	Class C
Parameter	Units	Standard	Guidance
Sample Collection Date			
Acetone	ug/l		
Acrylonitrile	ug/l	5	
Benzene	ug/l	0.7	
Bromochloromethane	ug/l		50
Bromodichloromethane	ug/l		
Bromoform	ug/l		50
Bromomethane	ug/l		
2-Butanone	ug/l		
Carbon Disulfide	ug/l		
Carbon Tetrachloride	ug/l	5	
Chlorobenzene	ug/l	5	
Chloroethane	ug/l		
Chloromethane	ug/l		
Chloroform	ug/l	7	
			50
Dibromochloromethane	ug/l		
1,2-Dibromo-3-chloropropane	ug/l		
1,2-Dibromoethane	ug/1		
Dibromomethane	ug/1	4.7	
1,2-Dichlorobenzene	ug/l		
1,4-Dichlorobenzene	ug/l	4.7	
Trans-1,4-Dichloro-2-Butene	ug/l	_	
1,1-Dichloroethane	ug/l	5	
1,2-Dichloroethane	ug/l	5	
1,1-Dichloroethene	ug/l	5	
cis-1,2-Dichloroethene	ug/l	5 5 5	
trans-1,2-Dichloroethene	ug/l	5	
1,2-Dichloropropane	ug/l	5	
cis-1,3-Dichloropropene	ug/l		
t-1,3-Dichloropropene	ug/l		
Ethylbenzene	ug/l	5	
2-Hexanone	ug/l		50
Iodomethane	ug/l		
Methylene Chloride	ug/l		
4-Methyl-2-Pentanone	ug/l		
Styrene	ug/l	5	
1,1,1,2-Tetrachloroethane	ug/l	5	
1,1,2,2-Tetrachloroethane	ug/l	5 5	
Tetrachloroethene	ug/l	Š	
Toluene	ug/l	5 5	
		5	
1,1,1-Trichloroethane	ug/l		
1,1,2-Trichloroethane	ug/l	5	
Trichloroethene	ug/l	5	
Trichlorofluoromethane	ug/l	5	
1,2,3-Trichloropropane	ug/l		
Vinyl Acetate	ug/l		
Vinyl Chloride	ug/l	2	
Total-Xylene	ug/l	5	

Table A. Lindley South Landfill RI/FS Volatile Organic Compounds Sediment Samples

Parameter	Criterion Aquatic (Chronic Texicity)	Criterion Health	Criterion Wildlife	Units	SED-1	SED-2	SED-3	dupe SED-3	SED-4	SED-5	SED-6	SED-7
Date Received					12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95
Date Analyzed					12/19/95	12/19/95	12/19/95	12/20/95	12/20/95	12/20/95	12/20/95	12/20/95
Chloromethane				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
Bromomethane				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
Vinyl Chloride				ug/kg	< 12	<20	<15	<16	< 12	<11	<12	<11
Chloroethane				ug/kg	< 12	<20	<15	<16	<12	<11	<12	<11
Methylene Chloride	•1			ug/kg	6 (J)	10 (7)	7 (J)	9 (J)	60	<11	7 (J)	6 (J)
Acetone	*2			ug/kg	10 (7)	73	36	<16	<12	<11	<12	<11
Carbon Disulfide				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
1,1-Dichloroethene				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
1,1-Dichloroethane				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
1,2-Dichloroethene - trans				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
Chloroform				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
1,2-Dichloroethane				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
2-Butanone				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
1,1,1-Trichloroethane				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
Carbon Tetrachloride				ug/kg	<12	<20	<15	< 16	<12	<11	<12	<11
Bromodichloromethane				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
1,2-Dichloropropane				ug/kg	<12	<20	<15	<16	< 12	<11	<12	<11
cis-1,3-Dichloropropene				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
Trichloroethene				ug/kg	<12	<20	<15	< 16	<12	<11	<12	<11
Dibromochloromethane				ug/kg	<12	<20	<15	<16	< 12	<11	<12	<11
1,1,2-Trichloroethane				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
Benzene				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
trans-1,3-Dichloropropene				ug/kg	<12	<20	<15	< 16	<12	<11	<12	<11
Bromoform				ug/kg	<12	<20	<15	<16	< 12	<11	< 12	<11
4-Methyl-2-Pentanone				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
2-Hexanone				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
Tetrachloroethane				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
1,1,2,2-Tetrachloroethane				ug/kg	<12	<20	<15	<16	< 12	<11	<12	<11
Toluene				ug/kg	<12	<20	<15	<16	< 12	<11	<12	<11
Chlorobenzene				ug/kg	<12	<20	<15	<16	< 12	<11	<12	<11
Ethylbenzene				ug/kg	<12	<20	<15	<16	< 12	<11	<12	<11
Styrene				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
Xylenes (Total)				ug/kg	<12	<20	<15	<16	<12	<11	< 12	<11
1,2-Dichloroethene-cis				ug/kg	<12	<20	<15	<16	<12	<11	<12	<11
Number of TICS* Identified					0		0	0	0	0	. (0

* - Tentatively Identified Compounds

J = Result is an Estimated Result Below the Reporting Limit or a Tentatively Identified Compound

*1 - Presence Generally a result of Laboratory Contamination, Sediment Criterion does not Exist.

*2 - Presence Generally a result of Laboratory Contamination., Sediment Criterion does not Exist

Table B. Lindley South Landfill RI/FS Semivolatile Organic Compounds Sediment Samples

.

	1	Criterion	Criterion	Criterion	I						······································	
Parameter	Units	Human	Aquatic	Wildlife	SED-1	SED-2	SED-3	dupe SED-3	SED-4	SED-5	SED-6	SED-7
rarameter	Units	Health	-	whome	SED-I	SED-2	SED-3	8ED-3	SED-4	SED-5	SED-0	SED-/
Date Received		neann	(Chronic Toxicity)		12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95
Date Extracted					12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95
Date Analyzed					01/15/96	01/16/96	01/15/96	01/16/96	01/15/96	01/15/96	01/15/96	01/15/96
Phenol	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
bis(2-chloroethyl)ether	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2-chlorophenol	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
1,3-Dichlorobenzene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
1.4-Dichlorobenzene	ug/kg		12000		84 (J)	130 (Л)	<510	100 (J)	130 (/)	120 (7)	88 (J)	87 (J)
1.2-Dichlorobenzene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2-methylphenol	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2.2-oxybis(1-chloropropane)	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
4-methylphenol	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
N-nitroso-di-n-proplyamine	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
hexachloroethane	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
nitrobenzene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
isophorone	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2-nitrophenol	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2,4-Dimethylphenol	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
bis(2-chloroethoxy)methane	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2,4-dichlorophenol	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
1,2,4-trichlorobenzene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
naphthalene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
4-chloroaniline	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
hexachlorobutadiene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
4-chloro-3-methylphenol	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2-methyinaphthalene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
Hexachlorocyclopentadiene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2,4,6-trichlorophenol	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2,4,5-trichlorophenol	ug/kg				<1000	<1700	<1300	<1300	<1000	<960	<990	<910
2-chloronaphthalene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2-nitroaniline	ug/kg				<1000	<1700	<1300	<1300	<1000	<960	<990	<910
dimethyl phthalate	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
scenaphthylene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2,6-dinitrotoluene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
3-nitroaniline	ug/kg				<1000	<1700	<1300	<1300	<1000	<960	<990	<910
acenaphthene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360

<u>Ś</u>

.

9 . M

Page 1 of 2

Table B. Lindley South Landfill RI/FS Semivolatile Organic Compounds Sediment Samples

Parameter	Units	Criterion Human Health	Criterion Aquatic (Chronk: Toxkty)	Criterion Wildlife	SED-1	SED-2	SED-3	dupe SED-3	SED-4	SED-5	SED-6	SED-7
Date Received					12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95
Date Extracted	L				12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95
Date Analyzed					01/15/96	01/16/96	01/15/96	01/16/96	01/15/96	01/15/96	01/15/96	01/15/96
2,4-dinitrophenol	ug/kg				<1000	<1700	<1300	<1300	<1000	<960	<990	<910
4-nitrophenol	ug/kg				<1000	<1700	<1300	<1300	<1000	<960	<990	<910
dibenzofuran	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
2,4-dinitrotoluene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
diethylphthalate	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
4-chlorophenyl-phenylether	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
fluorene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
4-nitroaniline	ug/kg				<1000	<1700	<1300	<1300	<1000	<960	<990	<910
4,6-dinitro-2-methylphenol	ug/kg				<1000	<1700	<1300	<1300	<1000	<960	<990	<910
N-Nitrosodiphenylamine	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
4-bromophenyl-phenylether	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
hexachlorobenzene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
pentachlorophenol	ug/kg				<1000	<1700	<1300	<1300	<1000	<960	<990	<910
phenanthrene	ug/kg		120000		<410	86 (J)	34 (J)	<530	<420	<380	<400	<360
anthracene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
carbozole	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
Di-n-butylphthalate	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
Fluoranthene	ug/kg		1020000		<410	74 (J)	<510	<530	<420	<380	<400	<360
pyrene	ug/kg				<410	130 (J)	<510	<530	<420	<380	<400	<360
butylbenzylphthalate	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
3,3-dichlorobenzidine	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
benzo(a)anthracene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
chrysene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
bis(2-ethylhexyl)phthalate	ug/kg		199500		79 (J)	360 (J)	210 (J)	150 (J)	170 (J)	170 (J)	180 (J)	87 (J)
Di-n-octyl phthalate	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
benzo(b)fluoranthene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
benzo(k)fluoranthene	ug/kg				<410	<670	<510	<530	< 420	<380	<400	<360
benzo(a)pyrene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
Indeno(1,2,3-cd)pyrene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
dibenzo(a,h)anthracene	ug/kg				<410	<670	<510	<530	<420	<380	<400	<360
benzo(g,h,i)perylene	ug/kg				<410	<670	< 510	<530	<420	<380	<400	<360
Number of TICS ⁺ Identified					9	20	15	14	15	13	13	9

* - Tentatively Identified Compounds

J = Result is an Estimated Result Below the Reporting Limit or a Tentatively Identified Compound

Table C. Lindley South Landfill RI/FSPCB/Pesticide CompoundsSediment Samples

Parameter	Units	Criterion Human Health	Criterion Aquatic (Chronic Toxicity)	Criterion Wildlife	SED-1	SED-2	SED-3	dupe SED-3	SED-4	SED-5	SED-6	SED-7
Date Received					<u>12/14/95</u>	<u>12/14/95</u>	<u>12/14/95</u>	12/14/95	12/14/95	12/14/95	12/14/95	<u>12/14/95</u>
Date Extracted					12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	<u>12/14/95</u>
Date Analyzed					12/27/95	12/27/95	<u>12/27/95</u>	12/27/95	12/27/95	12/27/95	12/27/95	12/27/95
alpha -BHC	ug/kg				<2.1	<3.3	<2.5	<2.6	<2.1	<1.9	<2.0	<1.8
beta-BHC	ug/kg				<2.1	<3.3	<2.5	<2.6	<2.1	<1.9	<2.0	<1.8
delta-BHC	ug/kg				<2.1	<3.3	<2.5	<2.6	<2.1	<1.9	<2.0	<1.8
gamma-BHC(Lindane)	ug/kg				<2.1	<3.3	<2.5	<2.6	<2.1	<1.9	<2.0	<1.8
Heptachlor	ug/kg				<2.1	<3.3	<2.5	<2.6	<2.1	<1.9	<2.0	<1.8
Aldrin	ug/kg	100		770	<2.1	0.15 (J)	<2.5	<2.6	<2.1	<1.9	<2.0	<1.8
Heptachlor epoxide	ug/kg	0.8	100	30	<2.1	0.25 (J)	<2.5	<2.6	<2.1	<1.9	<2.0	<1.8
Endosulfan I	ug/kg		30		<2.1	<3.3	<2.5	<2.6	0.062 (J)	<1.9	<2.0	<1.8
Dieldrin	ug/kg	100		770	<4.1	0.19 (J)	0.13 (J)	0.14 (J)	0.13 (J)	0.097 (J)	<4.0	<3.6
4,4' -DDE	ug/kg	10		1000	<4.1	<6.7	0.19 (J)	0.22 (J)	0.13 (J)	<3.8	<2.0	<3.6
Endrin	ug/kg	800	4000	800	<4.1	<6.7	<5.1	< 5.3	0.091 (J)	0.46 (J)	<2.0	<3.6
Endosulfan II	ug/kg				<4.1	<6.7	<5.1	< 5.3	<4.2	<3.8	<2.0	<3.6
4,4'-DDD	ug/kg	10		1000	<4.1	<6.7	<5.1	< 5.3	0.066 (J)	0.27 (J)	<2.0	<3.6
Endosulfan Sulfate	ug/kg				<4.1	<6.7	0.17 (J)	0.17 (J)	0.41 (J)	0.58 (J)	<2.0	<3.6
4,4'-DDT	ug/kg	10	1000	1000	<4.1	0.16 (J)	<5.1	0.23 (J)	<4.2	<3.8	<2.0	<3.6
Methoxychlor	ug/kg		600		<21	3.7 (J)	<25	26	<21	< 19	<20	<18
Endrin Ketone	ug/kg				<4.1	0.29 (J)	<5.1	<5.3	<4.2	<3.8	<4.0	<3.6
Endrin Aldehyde	ug/kg				<4.1	<6.7	<5.1	< 5.3	<4.2	<3.8	<4.0	<3.6
alpha-chlordane	ug/kg	1	30	6	<2.1	<3.3	<2.5	0.22 (J)	<2.1	<1.9	<2.0	<1.8
gamma-chlordane	ug/kg	1	30	6	<2.1	<3.3	<2.5	<2.6	<2.1	<1.9	<2.0	<1.8
Toxaphene	ug/kg				<210	<330	<250	<260	<210	<190	<200	<180
Aroclor 1016	ug/kg				<41	<67	<51	<53	<42	<38	<40	<36
Aroclor 1221	ug/kg				<82	<130	<100	<110	<83	<77	<79	<72
Aroclor 1232	ug/kg				<41	<67	<51	<53	<42	<38	<40	<36
Aroclor 1242	ug/kg				<41	<67	<51	<53	<42	<38	<40	<36
Aroclor 1248	ug/kg				<41	<67	<51	<53	<42	<38	<40	<36
Aroclor 1254	ug/kg				<41	<67	<51	<53	<42	<38	<40	<36
Aroclor 1260	ug/kg				<41	<67	<51	<53	<42	<38	<40	<36

J = Result is an Estimated Result Below the Reporting Limit or a Tentatively Identified Compound

•

Table D. Lindley South Landfill RI/FSInorganic ParametersSediment Samples

		Metals			••••••••••••••••••••••••••••••••••••••	dupe			·····	
Parameter	Units	Criterion	SED-1	SED-2	SED-3	SED-3	SED-4	SED-5	SED-6	SED-7
Date Received			12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95
Aluminum	mg/kg		11500	2290	6260	3830	7360	7210	4060	8460
Antimony	mg/kg	2 6	<7.2	<11.6	< 8.8	<9.2	<7.2	< 6.7	<6.9	< 6.3
Arsenic	mg/kg	6	7.6	5.2	5.7	5.9	6	6.2	4	10.3
Barium	mg/kg		97.4	16.8	68.5	38.3	63.4	52	30.7	54.9
Beryllium	mg/kg		0.73	< 0.36	0.45	< 0.29	0.49	0.53	0.31	0.68
Cadmium	mg/kg	0.6	< 0.52	< 0.84	< 0.64	< 0.67	< 0.52	< 0.48	< 0.50	< 0.46
Calcium	mg/kg		2580	1850	1870	1390	1880	3050	4310	5310
Chromium	mg/kg	26	17.2	4.2	9.4	7.3	10.1	11.7	6.7	13.8
Cobalt	mg/kg		11.9	<4.6	7.6	5	7.9	9.4	5.7	11.3
Copper	mg/kg	16	14.3	5	8.1	9.1	7.6	7.7	4.9	10.4
Iron	mg/kg	2.0 %	27700	5140	14800	9320	15800	21100	13200	26900
Lead	mg/kg	31	47.7	164	31.2	1.8	61.5	64.4	35.2	29.7
Magnesium	mg/kg		4010	896	2040	1340	2360	3660	1700	4830
Manganese	mg/kg	460	485	115	851	176	504	383	367	320
Mercury	mg/kg	0.15	< 0.12	< 0.20	< 0.15	<0.16	< 0.12	< 0.11	< 0.12	
Nickel	mg/kg	16	28.4	<5.8	14.7	10.7	16.7	19.5	9.6	22.1
Potassium	mg/kg		1250	<182	229	< 145	612	191	< 109	243
Selenium	mg/kg		< 0.69	<1.1	< 0.85	< 0.89	< 0.70	< 0.64	< 0.67	< 0.61
Silver	mg/kg	1	<1.4	<2.3	<1.7	<1.8	<1.4	<1.3	<1.4	<1.2
Sodium	mg/kg		217	348	248	221	210	202	< 140	142
Thallium	mg/kg		< 0.99	<1.6	<1.2	6.9	<1.0	< 0.92	< 0.95	< 0.87
Vanadium	mg/kg		8.2	<3.3	3.9	3	5.6	4.1	2.8	3.1
Zinc	mg/kg	120	59.1	40.1	65.8	46.9	38.6	45.7	24.3	55.9
Molybdenum	mg/kg		NR	NR	NR	NR	NR	NR	NR	NR
Total Cyanide	mg/kg		< 1.2	<2.0	< 1.5	<1.6	<1.2	<1.1	<1.2	<1.1

NR - Not Required

Lindley South Landfill RI/FS Semivolatile Organic Analysis Tentatively Identified Compounds (TICs)

					,			<u></u>	
Parameter	Units	SED-1	SED-2	SED-3	SED-3Dupe	SED-4	SED-5	SED-6	SED-7
Date Received		12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95	12/14/95
Date Extracted		12/14/95	12/14/95	12/14/95	12/14/95	<u>12/14/95</u>	12/14/95	12/14/95	12/14/95
Date Analyzed		01/15/96	01/16/95	01/15/96	01/16/95	01/15/96	01/15/96	01/15/96	01/15/96
Aldol Condensate	ug/kg	1000 J	30000 J	10000 J	20000 J	20000 J	2 Cmpds	20000 J	20000
Unknown	ug/kg	4 Cmpds	4 Cmpds	2 Cmpds	5 Cmpds	4 Cmpds	4 Cmpds	7 Cmpds	3 Cmpds
Unknown Oxygenated Compound	ug/kg	1 Cmpd	2 Cmpds	2 Cmpds	2 Cmpds	3 Cmpds	2 Cmpds	3 Cmpds	2 Cmpds
Unknown Oxyenated Aromatic	ug/kg	1 Cmpd				1 Cmpd	1 Cmpd	1 Cmpd	1 Cmpd
Unknown Alkane	ug/kg	2 Cmpds	3 Cmpds	5 Cmpds	3 Cmpds	2 Cmpds			2 Cmpds
Unknown Carboxylic Acid	ug/kg		4 Cmpds	1 Cmpd		1 Cmpd			
Unknown Hydrocarbon	ug/kg		i Cmpd			2 Cmpds	1 Cmpd		
Unknown Sterol	ug/kg		3 Cmpds	2 Cmpds	1 Cmpd				
Ergost-5-en-3-ol (beta)	ug/kg		3000 J						
Column Bleed	ug/kg		1 Cmpd		1 Cmpd	l Cmpd	1 Cmpd		
Unknown Aromatic	ug/kg			1 Cmpd					
Hexadecanoic Acid (9CI)	ug/kg			900 J	600 J				
Unknown Phthalate	ug/kg						1 Cmpd	1 Cmpd	
Sulfur, mol. (s8)	ug/kg						1 Cmpd		
Total Number of TICs		9	20	15	14	15	13	13	9

Unknown compounds are denoted by the number of different unknowns identified from samples collected at the specific locations

,

Table A. Lindley South Landfill RI/FSVolatile Organic CompoundsSurface Water Samples

					Dupe			an an an an an an an an an an an an an a	
Parameter	Units	SW-1	SW-2	<u>SW-3</u>	<u>SW-3</u>	<u>SW-4</u>	SW-5	<u>SW-6</u>	SW-7
Date Received		12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95
Date Analyzed		12/22/95	12/22/95	12/22/95	12/22/95	12/22/95	12/20/95	12/22/95	12/22/95
Chloromethane	ug/l	<10	<10	< 10	< 10	< 10	< 10	< 10	<10
Bromomethane	ug/l	<10	<10	< 10	< 10	< 10	< 10	< 10	<10
Vinyl Chloride	ug/l	<10	<10	<10	< 10	< 10	< 10	< 10	<10
Chloroethane	ug/l	< 10	<10	< 10	< 10	< 10	<10	< 10	<10
Methylene Chloride	ug/l	<10	<10	< 10	< 10	<10	< 10	<10	<10
Acetone	ug/l	<10	<10	< 10	< 10	< 10	<10	<10	<10
Carbon Disulfide	ug/l	<10	<10	< 10	<10	<10	<10	<10	<10
1,1-Dichloroethene	ug/l	<10	<10	< 10	<10	<10	<10	<10	<10
1,1-Dichloroethane	ug/l	<10	<10	< 10	< 10	< 10	· <10	<10	<10
1,2-Dichloroethene - trans	ug/l	<10	<10	< 10	<10	<10	<10	<10	<10
Chloroform	ug/l	<10	<10	< 10	< 10	<10	<10	<10	<10
1,2-Dichloroethane	ug/l	<10	<10	<10	< 10	<10	<10	<10	<10
2-Butanone	ug/l	<10	<10	<10	<10	<10	<10	<10	<10
1,1,1-Trichloroethane	ug/l	<10	<10	<10	<10	< 10	<10	< 10	<10
Carbon Tetrachloride	ug/l	<10	<10	< 10	<10	<10	<10	<10	<10
Bromodichloromethane	ug/l	<10	<10	< 10	<10	<10	<10	<10	<10
1,2-Dichloropropane	ug/l	<10	<10	<10	<10	<10	<10	<10	<10
cis-1,3-Dichloropropene	ug/l	< 10	<10	<10	<10	< 10	< 10	< 10	<10
Trichloroethene	ug/l	<10	<10	<10	<10	< 10	<10	<10	<10
Dibromochloromethane	ug/l	<10	<10	<10	<10	<10	<10	< 10	<10
1,1,2-Trichloroethane	ug/l	<10	<10	< 10	<10	< 10	<10	< 10	<10
Benzene	ug/l	<10	< 10	< 10	<10	<10	<10	<10	<10
trans-1,3-Dichloropropene	ug/l	<10	<10	< 10	<10	< 10	<10	· <10	<10 ,
Bromoform	ug/l	<10	<10	< 10	<10	<10	< 10	<10	<10
4-Methyl-2-Pentanone	ug/l	<10	< 10	<10	<10	< 10	<10	<10	<10
2-Hexanone	ug/l	<10	< 10	< 10	<10	<10	< 10	<10	<10
Tetrachloroethane	ug/l	<10	<10	<10	<10	< 10	<10	< 10	<10 ·
1,1,2,2-Tetrachloroethane	ug/l	<10	<10	< 10	<10	<10	<10	<10	<10
Toluene	ug/l	< 10	<10	< 10	< 10	< 10	<10	< 10	<10
Chlorobenzene	ug/l	< 10	<10	< 10	<10	< 10	< 10	< 10	<10
Ethylbenzene	ug/l	< 10	<10	< 10	<10	<10	< 10	<10	<10
Styrene	ug/l	< 10	<10	< 10	<10	< 10	<10	<10	<10
Xylenes (Total)	ug/l	<10	<10	< 10	< 10	<10	< 10	< 10	<10
1,2-Dichloroethene-cis	ug/l	< 10	< 10	< 10	< 10	< 10	< 10	<10	<10
Number of TICS* Identified		0	0	0	0	0	0	0	0

, -

* - Tentatively Identified Compounds

Table B. Lindley South Landfill RI/FSSemivolatile Organic CompoundsSurface Water Samples

. .

÷

.

·		Class C	Ι			Dupe				
Parameter	Units	Standard/Guidance	<u>SW-1</u>	<u>SW-2</u>	SW-3	<u>SW-3</u>	<u>SW-4</u>	<u>SW-5</u>	<u></u>	<u>SW-7</u>
Date Received		a de la companya de l	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95
Date Extracted		<u></u>	12/17/95	12/17/95	12/18/95	12/18/95	12/16/95	<u>12/18/95</u>	12/18/95	12/16/95
Date Analyzed			01/11/96	01/11/96	01/12/96	01/12/96	01/11/96	01/12/96	01/12/96	01/11/96
Phenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
bis(2-chloroethyl)ether	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2-chlorophenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,3-Dichlorobenzene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,4-Dichlorobenzene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,2-Dichlorobenzene.	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2-methylphenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,2-oxybis(1-chloropropane)	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-methylphenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
N-nitroso-di-n-proplyamine	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
hexachloroethane	ug/l		<10	<10	<10	<10	<10	<10	< 10	<10
nitrobenzene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
isophorone	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2-nitrophenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,4-Dimethylphenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
bis(2-chloroethoxy)methane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,4-dichlorophenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,2,4-trichlorobenzene	ug/1		<10	<10	<10	<10	<10	<10	<10	<10
naphthalene	ug/l		<10	<10	<10	<10	<10	< 10	<10	<10
4-chloroaniline	ug/l	and the second second reaction of the	<10	< 10	<10	<10	<10	<10	<10	<10
hexachlorobutadiene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-chioro-3-methylphenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2-methylnaphthalene	• ug/l		<10	<10	<10	<10	<10	· <10	<10	<10
Hexachlorocyclopentadiene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,4,6-trichlorophenol	ug/l		<10	< 10	<10	<10	<10	<10	<10	<10
2,4,5-trichlorophenol	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
2-chloronaphthalene	ug/l		<10	<10	· <10	<10	<10	<10	<10 .	<10
2-nitroaniline	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
dimethyl phthalate	ug/l		<10	<10	<10	<10	<10	<10	- <10	<10
acenaphthylene	ug/l		<10	<10	<10	<10	<10	<10	< 10	<10
2,6-dinitrotoluene	ug/l		<10	< 10	<10	<10	<10	<10	<10	<10
3-nitroaniline	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
acenaphthene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10

Page 1 of 2

Table B. Lindley South Landfill RI/FSSemivolatile Organic CompoundsSurface Water Samples

	T	Class C	[Dupe				
Parameter	Units	Standard/Guidance	SW-1	SW-2	<u>SW-3</u>	SW-3	SW-4	SW-5	<u>SW-6</u>	SW-7
Date Received			12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95
Date Extracted			12/17/95	12/17/95	12/18/95	12/18/95	12/16/95	12/18/95	12/18/95	12/16/95
Date Analyzed			01/11/96	01/11/96	01/12/96	01/12/96	01/11/96	01/12/96	01/12/96	01/11/96
2,4-dinitrophenol	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
4-nitrophenol	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
dibenzofuran	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,4-dinitrotoluene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
diethylphthalate	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-chlorophenyl-phenylether	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
fluorene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-nitroaniline	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
4,6-dinitro-2-methylphenol	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
N-Nitrosodiphenylamine	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-bromophenyl-phenylether	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
hexachlorobenzene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
pentachlorophenol	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
phenanthrene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
anthracene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
carbozole	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Di-n-butylphthalate	ug/l	50	<10	<10	<10	<10	9 (J)	<10	<10	<10
Fluoranthene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
pyrene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
butylbenzylphthalate	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
3,3-dichlorobenzidine	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
benzo(a)anthracene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
chrysene	ug/l		<10	<10	<10	<10	<10	· <10	<10	<10
bis(2-ethylhexyl)phthalate	ug/l	50	3 ()	10	8 (J)	7()	20)	8 (J)	<10	10
Di-n-octyl phthalate	ug/i		<10	<10	<10	< 10	<10	<10	<10	<10
benzo(b)fluoranthene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
benzo(k)fluoranthene	ug/l		<10	<10	· <10	<10	<10	<10	<10	<10
benzo(a)pyrene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Indeno(1,2,3-cd)pyrene	ug/l		<10	<10	<10	<10	<10	< 10	<10	<10
dibenzo(a,h)anthracene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
benzo(g,h,i)perylene	ug/l		<10	<10	<10	< 10	<10	<10	< 10	<10
Number of TICS* Identified	Ľ.		4	1	1	0	4	0	2	1

* - Tentatively Identified Compounds J = Result is an Estimated Result Below the Reporting Limit or a Tentatively Identified Compound

Table C. Lindley South Landfill RI/FS PCB/Pesticide Compounds Surface Water Samples

.

-					Dupe	<u></u>			
Parameter	Units	SW-1	SW-2	SW-3	SW-3	SW-4	SW-5	<u>SW-6</u>	SW-7
Date Received		12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95
Date Extracted		12/18/95	12/18/95	12/18/95	12/18/95	12/18/95	12/18/95	12/18/95	12/18/95
Date Analyzed		12/27/95	12/27/95	12/27/95	12/27/95	12/27/95	12/27/95	12/28/95	12/28/95
alpha -BHC	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
beta-BHC	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	<0.05	< 0.05	< 0.05
delta-BHC	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	<0.05	< 0.05	< 0.05
gamma-BHC(Lindane)	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	<0.05	<0.05	< 0.05
Heptachlor	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	<0.05	<0.05	<0.05
Aldrin	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Heptachlor epoxide	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	<0.05
Endosulfan I	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dieldrin	ug/l	< 0.10	<0.10	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10
4,4' -DDE	ug/l	< 0.10	<0.10	<0.10	<0.10	< 0.10	<0.10	<0.10	<0.10
Endrin	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
Endosulfan II	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
4,4'-DDD	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
Endosulfan Sulfate	ug/l	< 0.10	<0,10	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10
4,4'-DDT	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
Methoxychlor	ug/l	< 0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50	<0.50
Endrin Ketone	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
Endrin Aldehyde	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
alpha-chlordane	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
gamma-chlordane	ug/l	< 0.05	< 0.05	< 0.05	· <0.05	< 0.05	< 0.05	<0.05	< 0.05
Toxaphene	ug/l	<5.0	<5.0	< 5.0	<5.0	<5.0	<5.0	<5.0	<5.0
Aroclor 1016	ug/l	<1.0	< 1.0	< 1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Aroclor 1221	ug/l	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
Aroclor 1232	ug/l	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Aroclor 1242	ug/l	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Aroclor 1248	ug/l	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Aroclor 1254	ug/l	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Aroclor 1260	ug/l	<1.0	< 1.0	<1.0	<1.0	<1.0	<1.0	< 1.0	<1.0

•

			Surfa	ce Water S	amples					
Parameter	Units	Class C Standard/Guidance	SW-1	SW-2	SW-3	Dupe SW-3	SW-4	SW-5	SW-6	SW-7
Hardness	mg CaCO3/1		221	189	178	192	144	176	178	226
Turbidity	NTU		29	>1000	14	14	42	2.3	6	290
TDS	ug/l	500000	330000	328000	280000	288000	163000	233000	243000	265000
Alkalinity	ug/1	200000	120000	110000	112000	116000	105000	120000	120000	120000
Chloride	ug/l		45000	100000	60000	61000	5000	3000	28000	4000
Sulfate	ug/l		80000	30000	40000	40000	25000	3000	30000	100000
Total Cyanide	ug/l	5.2	<10	<10	<10	<10	<10	<10	<10	<10
Ammonia - N	ug/l	*1	<100	<100	<100	<100	<100	<100	<100	<100
COD	ug/l	•	26700	29100	< 5000	< 5000	<5000	5300	10200	< 5000
тос	ug/l		11800	5800	3700	3400	3100	4500	4600	2000
Aluminum	ug/l		1170	7710	495	577	1870	172	235	2550
Antimony	ug/l		<29.0	<29.0	<29.0	<29.0	<29.0	<29.0	<29.0	<29.0
Arsenic	ug/l	190	<6.5	18.1	<6.5	<6.5	< 6.5	<6.5	<6.5	<6.5
Barium	ug/l		112	177	49.7	55.1	46.8	42.4	42.4	58.4
Beryllium	ug/l	*2	< 0.90	< 0.90	< 0.90	< 0.90	< 0.90	< 0.90	< 0.90	< 0.90
Cadmium	ug/l	*3	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
Calcium	ug/1	-	61800	51300	50300	53700	42400	50100	50500	53700
Chromium	ug/l	*4	< 5.3	6.6	< 5.3	<5.3	<5.3	< 5.3	< 5.3	< 5.3
Cobalt	ug/l	5	<11.3	<11.3	<11.3	<11.3	<11.3	<11.3	<11.3	<11.3
Copper	ug/l	*5	30.4	35.4	22.8	19.8	18.1	15.2	11.4	11.4
Iron	ug/l	300	2450	24200	1220	1410	4080	294	391	5320
Lead	ug/l	*6	51.2	47.2	3.7	3.6	4.4	<2.1	<2.1	4.8
Magnesium	ug/l	·	16100	14700	12800	14100	9170	12300	12500	22400
Mangancec	ug/l		643	1570	148	160	132	79.4	45.2	227
Mercury	ug/l	0.2	0.2	0.2	0.2	< 0.2	0.2	0.2	0.2	0,2
Nickel	ug/l	*7	<14.3	17.9	<14.3	<14.3	<14.3	<14.3	<14.3	<14.3
Potassium	ug/l		13700	2520	1830	1960	988	1330	1290	1020
Selenium	ug/l		<2.8	<2.8	<2.8	<2.8	<2.8	<2.8	<2.8	<2.8
Silver	ug/1	0,1	<5.6	< 5.6	< 5.6	<5.6	<5.6	<5.6	< 5.6	<5.6
Sodium	ug/l		19800	70500	35800	40300	5680	21000	21500	11400
Thallium	ug/l	8	<4.0	<4.0	<4.0	·<4.0	<4.0	<4.0	<4.0	<4.0
Vanadium	ug/l	14	<8.2	<8.2	< 8.2	<8.2	<8.2	<8.2	<8.2	<8.2
Zinc	ug/l	30	36.4	102	35.4	36.7	36.7	35	24.8	26.4
Boron	ug/1	10000	NR	NR	NR	NR	NR	NR	NR	NR

1

1 -

Table D. Lindley South Landfill RI/FS Inorganic Parameters Surface Water Samples

*1 - Dependent upon sample temperature and pH (see reg)

*2 - 0.011 mg/l when hardness < 75 mg/l; 1.10 mg/l when hardness > 75 mg/l

+3 - exp(0.7852[ln(handness)]-3.490)

*4 - exp(0.819[ln(hardness)]+1.561)

*5 - exp(0.8545[in(hardness)]-1.465)

*6 - exp(1.266[ln(hardness)]-4.661)

*7 - exp(0.76[in(hardness)]+1.06

Lindley South Landfill RI/FS Semivolatile Organic Analysis Tentatively Identified Compounds (TICs)

			[1	l l						
Parameter	Units	GW-1	GW-4	MW-2D	MW-2S	MW-3	MW-4	RW-1	SW-1	SW-2	SW-3	SW-4	SW-6	SW-7
Date Received	2 2	12/16/95	12/16/95		·			12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95
Date Extracted		Contraction of the local division of the loc	12/17/95	And the owner of the owner of the owner of the owner of the owner of the owner of the owner owner owner owner o	the second second second second second second second second second second second second second second second s				States and states and states	and the second second second			2	
Date Analyzed		01/12/96	01/12/96	01/12/96	01/12/96	01/12/96	01/12/96	01/12/96	01/11/96	01/11/96	01/12/96	01/11/96	01/12/96	01/11/96
Unknown Concentration Range (1 ug/l - 10 ug/l)	ug/l	2 cmpds	1 cmpd		6 cmpds		1 cmpd		1 cmpd		1 cmpd	1 cmpd		
Unknown Concentration Range (11 ug/l - 20 ug/l)	ug/l				2 cmpda									
Unknown Concentration Range (21 ug/l - 30 ug/l)	ug/l						}							
Unknown Concentration Range (31 ug/l - 40 ug/l)	ug/l													
Unknown Concentration Range (41 ug/l - 50 ug/l)	ug/l											· ·		
Unknown Oxygenated Compounds (1 ug/l - 10 ug/l)	ug/l	2 cmpds		1 cmpd	4 cmpds		1 cmpd	1 cmpd				1 cmpd	2 cmpd	1 cmpd
Unknown Oxygenated Compounds (11 ug/l - 20 ug/l)	ug/l				1 cmpd									
Unknown Oxygenated Compounds (21 ug/l - 30 ug/l)	ug/l				1 cmpd									
Unknown Oxygenated Compounds (31 ug/l - 40 ug/l)	ug/l				1 cmpd									
Unknown Oxygen : Compounds (41 ug/l - 50 ug/l)	ug/l													
Unknown Aromatic	ug/l				8 J									
Bicyclo(2.2.1)heptan-2-one	ug/l	. '			50 J							•		
Sulfur, mol (s8) (8CI9CI)	ug/l					7 J								
Unknown Alkane, Concentration Range (1 - 10 ug/l)	ug/l			-					1 cmpd	1 cmpd		2 cmpd		
Unknown Alkane, Concentration Range (11 - 20 ug/l)	ug/l	х. н.							1 cmpd	ļ	ļ	. -		1
Unknown Alkane, Concentration Range (21 - 30 ug/l)	ug/l										.			
Unknown Alkane, Concentration Range (31 - 40 ug/l)	ug/l								1 cmpd				1	
Unknown Alkane, Concentration Range (41 - 50 ug/l)	ug/i							<u> </u>				<u> </u>		<u>l</u>
Total Number of TICs		4		1	17	1	2	1	4	1	1	4	2	<u> </u>

Unknown compounds are denoted by the number of different unknowns identified from samples collected at the specific locations

LINDLEY SOUTH LANDFILL: REMDIAL INVESTIGATION - GROUNDWATER ELEVATIONS

	[DECEMBER 1995		
Well	Top of Cap Elevation	Top of PVC Elevation	Depth to Water 12/13/95	Water Elevation 12/13/95
MW-1	1464.11	1463.97	7.44	· 1456.53
MW-2D	1460.21	1460.08	30.15	1429.93
MW-2S	1460.51	1460.37	6.22	1454.15
MW-3	1486.80	1486.59	8.00	1478.59
MW-4	1515.16	1515.01	6.69	1508.32
PZ-1	1543.66	1543.17	12.89	1530.28
GW-1	1544.64	1544.44	25.14	1519.30
GW-2	1486.59	1486.19	18.80	1467.39
GW-3	1463.87	1463.48	12.76	1450.72
GW-4	1482.77	1482.67	13.09	1469.58
GW-5	1500.64	1500.43	10.37	1490.0
OW-101	1471.64	1471.44	12.11	1459.3
OW-103	1547.25	1546.76	11.78	1534.9
OW-104	1502.09	1501.11		
OW-105	1503.11	1501.81	14.52	1487.29
OW-106	1487.28	1486.64	13.64	1473.00
OW-107	1525.80	1525.71	11.59	1514.1
OW-109	1509.82	1509.55	4.36	1505.1
OW-110	1462.20	1461.80	11.36	1450.4

Ó

APRIL	18.	1996	
AFRIL		1330	

		APRIL 18, 1990			
Well	Top of Cap Elevation	Top of PVC Elevation	Depth to Water	Water Elevation	Elev. Change Since 12/95
MW-1	1464.11	1463.97	4.69	1459.28	-2.75
MW-2D	1460.21	1460.08	29.25	1430.83	-0.9
MW-2S	1460.51	1460.37	5.05	1455.32	-1.17
MW-3	1486.80	1486.59	7.66	1478.93	-0.34
MW-4	1515.16	1515.01	5.08	1509.93	-1.61
PZ-1	1543.66	1543.17	7.94	1535.23	-4.95
GW-1	1544.64	1544.44	obstruction		
GW-2	1486.59	1486.19	14.73	1471.46	-4.07
GW-3	1463.87	1463.48			
GW-4	1482.77	1482.67	15.12	1467.55	2.03
GW–5	1500.64	1500.43	8.94	1491.49	-1.43
OW-101	1471.64	1471.44	7.67	1463.77	-4.44
OW-103	1547.25	1546.76	7.75	1539.01	-4.03
OW-104	1502.09	1501.11	9.06	1492.05	
OW-105	1503.11	1501.81	13.64	1488.17	-0.88
OW-106	1487.28	1486.64	12.26	1474.38	-1.38
OW-107	1525.80	1525.71	8.73	1516.98	-2.86
OW-109	1509.82	1509.55	4.63	1504.92	.0.27
OW-110	1462.20	1461.80	5.64	1456.16	-5.72

Table A. Lindley South Landfill RI/FS Volatile Organic Compounds Groundwater Samples

· · · · · · · · · · · · · · · · · · ·		Class GA			Dupe					
Parameter	Units	Standards	GW-1	<u>GW-4</u>	GW-4	<u>MW-1</u>	MW-2D	MW-2S	<u>MW-3</u>	MW-4
Date Received		I	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95
Date Analyzed		1	12/22/95	12/22/95	12/22/95	12/22/95	12/22/95	12/20/95	12/22/95	12/22/95
Chloromethane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Bromomethane	ug/l		<10	· <10	<10	<10	<10	<10	<10	<10
Vinyl Chloride	ug/l		<10	<10	<10	<10	< 10	<10	<10	<10
Chloroethane	ug/l		<10	<10	<10	<10	< 10	<10	<10	<10
Methylene Chloride	ug/l	5	<10	<10	<10	<10	<10	4 (J)	<10	<10
Acetone	' ug/l		<10	<10	<10	<10	<10	7 ()	<10	<10
Carbon Disulfide	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,1-Dichloroethene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,1-Dichloroethane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,2-Dichloroethene - trans	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Chloroform	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,2-Dichloroethane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2-Butanone	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,1,1-Trichloroethane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Carbon Tetrachloride	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Bromodichloromethane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,2-Dichloropropane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
cis-1,3-Dichloropropene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Trichloroethene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Dibromochloromethane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,1,2-Trichloroethane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Benzene	ug/1		<10	<10	<10	<10	<10	<10	<10	_ <10
trans-1,3-Dichloropropene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Bromoform	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-Methyl-2-Pentanone	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2-Hexanone	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Tetrachloroethane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,1,2,2-Tetrachloroethane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Toluene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Chlorobenzene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Ethylbenzene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Styrene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Xylenes (Total)	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,2-Dichloroethene-cis	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Number of TICS* Identified			0	0	0	0	0	0	0	0

* - Tentatively Identified Compounds

J = Result is an Estimated Result Below the Reporting Limit or a Tentatively Identified Compound

. •

~	Semiv	Table B.
Groundwater Samples	Semivolatile Organic Compounds	Fable B. Lindley South Landfill RI/F S
amples	Compounds	Landfill RI/FS

8

.

Parameter	Units	Class GA Standard/Guidance	GW-1	GW-4	GW4	MW-1	MW-2D	MW-2S	MW-3	MW4
Date Received			12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95
Date Extracted			12/18/95	12/17/95	12/16/95	12/17/95	12/18/95	12/17/95	12/17/95	12/17/95
Date Analyzed			01/12/96	01/12/96	01/12/96	01/11/96	01/12/96	01/12/96	01/12/96	01/12/96
Phenol	ng/l		·<10	<10	<10	<10	<10	<10	<10	<10
bis(2-chloroethyl)ether	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2-chlorophenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,3-Dichlorobenzene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,4-Dichlorobenzene	· ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,2-Dichlorobenzene	ug/1		<10	<10	<10	<10	<10	<10	<10	<10
2-methylphenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,2-oxybis(1-chloropropane)	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-methylphenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
N-nitroso-di-n-proplyamine	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
hexachloroethane	ug/l	•	<10	<10	<10	< 10	<10	<10	<10	<10
nitrobenzene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
isophorone	l/gu		<10	<10	<10	<10	<10	<10	<10	<10
2-nitrophenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,4-Dimethylphenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
bis(2-chloroethoxy)methane	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,4-dichlorophenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
1,2,4-trichlorobenzene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
naphthalene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-chloroaniline	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
hexachlorobutadiene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-chloro-3-methylphenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2-methylnaphthalene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Hexachlorocyclopentadiene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,4,6-trichlorophenol	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,4,5-trichlorophenol	ug/l		<25	<25	<25	<25	<25	<25	< 25	<25
2-chloronaphthalene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2-nitroaniline	ug/l		<25	<25	<25	< 25	<25	< 25	<25	~ 25
dimethyl phthalate	ug/l	•	<10	<10	<10	<10	<10	<10	<10	<10
acenaphthylene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,6-dinitrotoluene	Ngu		<10	<10	<10	<10	<10	<10	<10	<10
a mineralitar	I/an		<25	۲2 ۲			<u>2</u>	<25	۲2 ۲۷	27 2
					<25	<25	ĺ			

Page 1 of 2

Table B. Lindley South Landfill RI/FS Semivolatile Organic Compounds Groundwater Samples

·		Class GA			Dupe				·····	
Parameter	Units	Standard/Guidance	<u>GW-1</u>	GW-4	GW-4	<u>MW-1</u>	<u>MW-2D</u>	<u>MW-2S</u>	<u></u>	MW-4
Date Received			12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95
Date Extracted			12/18/95	12/17/95	12/16/95	12/17/95	12/18/95	12/17/95	12/17/95	12/17/95
Date Analyzed			01/12/96	01/12/96	01/12/96	01/11/96	01/12/96	01/12/96	01/12/96	01/12/96
2,4-dinitrophenol	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
4-nitrophenol	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
dibenzofuran	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
2,4-dinitrotoluene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
dicthylphthalate .	ug/l	50	<10	<10	<10	<10	<10	16	<10	<10
4-chlorophenyl-phenylether	ug/l		<10	<10	<10	<10	<10	<10	· <10	<10
fluorene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-nitroaniline	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
4,6-dinitro-2-methylphenol	ug/l		<25	<25	<25	<25	<25	<25	. <25	<25
N-Nitrosodiphenylamine	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
4-bromophenyl-phenylether	ug/l		<10	<10	<10	. <10	<10	<10	<10	<10
hexachlorobenzene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
pentachlorophenol	ug/l		<25	<25	<25	<25	<25	<25	<25	<25
phenanthrene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
anthracene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
carbozole	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Di-n-butylphthalate	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Fluoranthene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
pyrene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
butylbenzylphthalate	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
3,3-dichlorobenzidine	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
benzo(a)anthracene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
chrysene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
bis(2-ethylhexyl)phthalate	ug/l	50	2 (J)	<10	3 (J)	<10	1 ()	2 (J)	6 (D)	2 (J)
Di-n-octyl phthalate	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
benzo(b)fluoranthene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
benzo(k)fluoranthene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
benzo(a)pyrene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
Indeno(1,2,3-cd)pyrene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
dibenzo(a,h)anthracene	ug/l		<10	<10	<10	<10	<10	<10	<10	<10
benzo(g,h,i)perylene	ug/l		<10	< 10	<10	<10	<10	<10	<10	<10
Number of TICS+ Identified			4	1	0	0	1	17	1	2

19.00 M

;

* - Tentatively Identified Compounds J = Result is an Estimated Result Below the Reporting Limit or a Tentatively Identified Compound

. . .

Table C. Lindley South Landfill RI/FSPCB/Pesticide CompoundsGroundwater Samples

-

· ·				Dupe			<u> </u>		
Parameter	Units	GW-1	GW-4	GW-4	<u>MW-1</u>	MW-2D	MW-2S	MW-3	MW-4
Date Received		12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95	12/16/95
Date Extracted		12/18/95	12/18/95	12/18/95	12/18/95	12/18/95	12/18/95	12/18/95	12/18/95
Date Analyzed		12/28/95	12/28/95	12/28/95	12/28/95	12/28/95	12/28/95	12/28/95	12/28/95
alpha -BHC	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
beta-BHC	ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
delta-BHC	· ug/l	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
gamma-BHC(Lindane)	ug/l	< 0.05	<0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Heptachlor	ug/l	< 0.05	<0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Aldrin	ug/l	< 0.05	<0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Heptachlor epoxide	ug/l	< 0.05	<0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Endosulfan I	ug/l	< 0.05	<0.05	<0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dieldrin	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	< 0.10	<0.10	<0.10
4,4' -DDE	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
Endrin	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
Endosulfan II	ug/l	<0.10	<0.10	<0.10	<0.10	< 0.10	<0.10	<0.10	<0.10
4,4'-DDD	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	< 0.10	<0.10	<0.10
Endosulfan Sulfate	ug/l	< 0.10	<0.10	<0.10	< 0.10	<0.10	<0.10	<0.10	< 0.10
4,4'-DDT	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
Methoxychlor	ug/l	< 0.50	<0.50	< 0.50	< 0.50	<0.50	< 0.50	<0.50	< 0.50
Endrin Ketone	ug/l	< 0.10	<0.10	<0.10	< 0.10	<0.10	< 0.10	<0.10	<0.10
Endrin Aldehyde	ug/l	< 0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
alpha-chlordane	ug/l	< 0.05	<0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
gamma-chlordane	ug/l	< 0.05	<0.05	< 0.05	<0.05	< 0.05	< 0.05	< 0.05	< 0.05
Toxaphene	ug/l	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0
Aroclor 1016	ug/l	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Aroclor 1221	ug/l	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
Aroclor 1232	ug/l	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Aroclor 1242	ug/l	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Aroclor 1248	ug/l	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Aroclor 1254	ug/l	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Aroclor 1260	ug/l	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0

Table D. Lindley South Landfill RI/FSInorganic ParametersGroundwater Samples

.

		Class GA	1		Dupe				-	
Parameter	Units	Standard/Guidance	GW-1	GW-4	GW-4	MW-1	MW-2D	MW-2S	MW-3	MW-4
Hardness	mg CaCO3/1		388	1265	1143	261	294	918	613	497
Turbidity	NTU		140	>1000		>1000	14	670	>1000	> 1000
TDS	ug/l	500000	425000	1600000		235000	485000	1390000	443000	483000
Alkalinity	ug/l		385000	290000		190000	268000	610000	310000	390000
Chloride	ug/l	250000	1000	4000		3700	6000	500000	20000	10000
Sulfate	ug/l	250000	44000	1170000		23000	174000	20000	35000	22000
Total Cyanide	ug/1	100	<10	<10	<10	<10	<10	· <10	<10	<10
Ammonia - N	ug/l	2000	152	238		<100	<100	<100	<100	<100
COD	ug/1		< 5000	6300		< 5000	< 5000	8100	< 5000	< 5000
TOC	ug/l		2200	2200		2600	4700	6700	5700	2700
Ahumimum	ug/l		2280	34700	31400	9100	285	2720 ·	46900	10800
Antimony	ug/l	3	<29.0	<29.0	<29.0	<29.0	<29.0	<29.0	<29.0	<29.0
Arsenic	ug/l	25	<6.5	35	23.3	< 6.5	26.1	< 6.5	12.7	26.5
Barium	ug/l	1000	61.6	402	319	184	101	320	1230	250
Beryllium	ug/1	3	<0.90	4	3	1.2	<0.90	<0.90	4.9	1.5
Cadmium	ug/l	10	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	· <2.0	<2.0
Calcium	ug/l		94000	317000	283000	66500	71000	224000	139000	132000
Chromium	ug/i	50	<5.3	53.7	45	23.5	<5.3	<5.3	69.5	15.8
Cobalt	ug/l		<11.3	58	45.2	<11.3	<11.3	<11.3	67.8	11.7
Copper	ug/1	200	14.3	86.8	96.5	33.7	11	15.1	106	34.2
Iron	ug/l	300	5710	99300	82800	21800	485	7020	97500	24500
Lead	ug/1	25	122	102	112	17.7	<2.1	3.9	132	18.8
Magnesium	ug/l	35000	37/200	115000	106000	23000	28300	87100	64500	40700
Manganese	ug/l	300	1250	6280	5160	639	538	3320	4700	694
Morcury	ug/l	2	0.2	0.2	0.2	<0.20	<0.20	0.2	0.2	< 0.20
Nickel	ug/l		<14.3	106	85.6	24.9	<14.3	28	127	17.3
Potassium	ug/l		2580	5750	5370	2490	1170	2650	8120	2900
Selenium	ug/l	10	<2.8	<14.0	<14.0	<2.8	<14.0	<2.8	<2.8	<2.8
Silver	ug/l	50	< 5.6	< 5.6	<5.6	<5.6	<5.6	<5.6	<5.6	<5.6
Sodium	ug/l	20000	31900	102000	99200	8780	76600	178000	24600	14100
Thallium	ug/1	4	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0
Vanadium	ug/l		<8.2	12.4	12.4	<8.2	<8.2	<8.2	36	<8.2
Zinc	ug/l	300	56	264	223	67.7	14.8	29.7	616	87.4
Boron	ug/l	1000	NR	<u>NR</u>	NR	NR	NR	NR	NR	NR

1

ায় ব

NR - Not Required

٠.

: .

•	с
LINDLEY SOUTH LANDFILL REMEDIAL IN	NVESTIGATION: HYDROGEOCHEMICAL COMPARISON

•

P

Ŕ

Ì

6

Ì

A

ſ

							•		
MONITORING	WELLS		CATIONS				ANIONS		
		Na + K	Mg	Ca	Total + mequiv/l	G-	SO4	CO3 + HCO3	Total – mequiv/l
Well GW-1	mg/l	34.48	37.20	94.00		1.00	44.00	425.00	
	mequiv/l	1.44	3.07	4.69		0.03	0.92	7.63	a de la compañía.
	%	15.65%	33.40%	50.96%	9.20	0.33%	10.69%		8.58
Well GW-4	mg/i	107.75	115.00	317.00		4.00	1170.00	290.00	a gara
	mequiv/i	4.50	9.50	15.82		0.11	24.37	5.21	
	%	15.09%	31.87%	53.04%	29.82	0.38%	82.08%		29.69
Well MW-1		44 07		66 50		0.70	00.00	400.00	
VVCII MIVV-I	mg/l	11.27	23.00	66.50 3.32		3.70	23.00	190.00	
	mequiv/l %	0.47 8.28%	33.40%	3.32 58.32%	5.69	0.10 2.61%	0.48 11.99%	3.41 85.40%	3.99
		0.2074			0.00	2.0170	11.5070	00.4070	0.00
Well MW-2S	mg/l	180.65	87.10	224.00		500.00	20.00	610.00	
•	mequiv/i	7.55	7.20	11.18		14.11	0.42	10.95	
÷.	%	29.12%	27.77%	43.12%	25.92	55.38%	1.63%	42.99%	25.48
Weil MW-3	mg/l	32.72	64.50	139.00		20.00	35.00	310.00	
	nequiv/i	1.37	5.33	6.93		0.56	0.73	5.57	
	%	10.03%	39.10%	50.88%	13.63	8.23%	10.63%	1	6.86
		47.05	10.70	100.00		10.00	00.00		19-1-
Well MW-4	mg/l	17.00	40.70	132.00		10.00	22.00	390.00	
	mequiv/1 %	0.71 6.66%	3.36 31.55%	6.59 61.79%	10.66	0.28 3.64%	0.46 5.92%	7.00 90.44%	7.74
			31.0070			0.0470	4.74 70		
Well MW-2D	mg/i	<i>11.11</i>	28.30	71.00		6.00	174.00	268.00	
	mequiv/l	3.25	2.34	3.54		0.17	3.62	4.81	
	%	35.59%	25.61%	38.80%	9.13	1.97%	42.11%	55.92%	8.60

•

--

Table A. Lindley South Landfill RI/FS Volatile Organic Compounds Residential Well Water Samples

2010	TT-94-	RW-1	RW-2	
Parameter	Units	<u>12/16/95</u>	<u> </u>	
Date Received		12/22/95		
Date Analyzed		<10	<10	
Chloromethane	ug/1	<10 <10	<10	
Bromomethane	ug/1		<10	
Vinyl Chloride	ug/l	<10	<10	
Chloroethane	ug/l	<10		
Methylene Chloride	ug/l	<10	<10	
Acetone	ug/l	<10	<10	
Carbon Disulfide	ug/l	<10	<10	
1,1-Dichloroethene	ug/1	<10	<10	
1,1-Dichloroethane	ug/l	<10	<10	
1,2-Dichloroethene - trans	ug/l	<10	<10	
Chloroform	ug/1	<10	<10	
1,2-Dichloroethane	ug/l	<10	<10	
2-Butanone	ug/l	<10	<10	
1,1,1-Trichloroethane	ug/l	<10	<10	
Carbon Tetrachloride	ug/l	<10	<10	
Bromodichloromethane	ug/l	<10	<10	
1,2-Dichloropropane	ug/l	<10	<10	
cis-1,3-Dichloropropene	ug/l	<10	<10	
Trichloroethene	ug/1	<10	<10	
Dibromochloromethane	ug/l	<10	<10	
1,1,2-Trichloroethane	ug/l	<10	<10	
Benzene	ug/l	<10	<10	
trans-1,3-Dichloropropene	ug/l	<10	<10	
Bromoform	ug/l	<10	<10	
4-Methyl-2-Pentanone	ug/l	<10	<10	
2-Hexanone	ug/l	<10	<10	
Tetrachloroethane	ug/l	<10	<10	
1,1,2,2-Tetrachloroethane	ug/l	<10	<10	
Toluene	ug/l	<10	< 10	
Chlorobenzene	ug/l	<10	<10	
Ethylbenzene	ug/l	< 10	<10	
Styrene	ug/l	<10	<10	
Xylenes (Total)	ug/l	< 10	< 10	
1,2-Dichloroethene-cis	ug/l	< 10	< 10	
Number of TICS* Identified		0	0	

-

_

* - Tentatively Identified Compounds

Table B. Lindley South Landfill RI/FSSemivolatile Organic CompoundsResidential Well Water Samples

· · · · · · · · · · · · · · · · · · ·		Class GA		•
Parameter	Units	Standard/Guidance	RW-1	<u>RW-2</u>
Date Received			12/16/95	12/16/95
Date Extracted			12/18/95	12/16/95
Date Analyzed			01/12/96	01/12/96
Phenol	ug/l		<10	<10
bis(2-chloroethyl)ether	ug/l		<10	<10
2-chlorophenol	ug/l		<10	<10
1,3-Dichlorobenzene	ug/l		<10	<10
1,4-Dichlorobenzene	ug/l		<10	<10
1,2-Dichlorobenzene	ug/l		<10	<10
2-methylphenol	ug/l		<10	<10
2,2-oxybis(1-chloropropane)	ug/l		<10	< 10
4-methylphenol	ug/l		<10	<10
N-nitroso-di-n-proplyamine	ug/l		<10	<10
hexachloroethane	ug/l		<10	<10
nitrobenzene	ug/l		<10	<10
isophorone	ug/l		<10	<10
2-nitrophenol	ug/l		<10	<10
2,4-Dimethylphenol	ug/l		<10	<10
bis(2-chloroethoxy)methane	ug/l		<10	<10
2,4-dichlorophenol	ug/l		<10	<10
1,2,4-trichlorobenzene	ug/l		<10	<10
naphthalene	ug/1		<10	<10
4-chloroaniline	ug/l		<10	<10
hexachlorobutadiene	ug/1		<10	<10
4-chloro-3-methylphenol	ug/l		<10	<10
2-methylnaphthalene	ug/l		<10	<10
Hexachlorocyclopentadiene	ug/l		<10	<10
2,4,6-trichlorophenol	ug/l		<10	< 10
2,4,5-trichlorophenol	ug/l		<25	<25
2-chloronaphthalene	ug/1		<10	<10
2-nitroaniline	ug/l		<25	<25
dimethyl phthalate	ug/l		<10	<10
acenaphthylene	ug/l		<10	<10
2,6-dinitrotoluene	ug/l		<10	<10
3-nitroaniline	ug/l		<25	<25
acenaphthene	ug/l		<10	< 10

Table B. Lindley South Landfill RI/FSSemivolatile Organic CompoundsResidential Well Water Samples

		Class GA		•
Parameter	Units	Standard/Guidance	<u>RW-1</u>	<u></u>
Date Received			12/16/95	12/16/95
Date Extracted			12/18/95	12/16/95
Date Analyzed		and the second second second second second second second second second second second second second second second	01/12/96	01/12/96
2,4-dinitrophenol	ug/l		<25	<25
4-nitrophenol	ug/l		<25	<25
dibenzofuran	ug/l		<10	<10 🔱
2,4-dinitrotoluene	ug/l		<10	<10 🗼
diethylphthalate	ug/l	50	<10	<10
4-chlorophenyl-phenylether	ug/l		<10	<10
fluorene	ug/l		<10	<10
4-nitroaniline	ug/l		<25	<25
4,6-dinitro-2-methylphenol	ug/l		<25	<25 🌵
N-Nitrosodiphenylamine	ug/l		<10	<10
4-bromophenyl-phenylether	ug/l		<10	<10
hexachlorobenzene	ug/l		<10	<10
pentachlorophenol	ug/l		<25	<25
phenanthrene	ug/l		<10	<10
anthracene	ug/l		<10	<10
carbozole	ug/1		<10	<10
Di-n-butylphthalate	ug/l		<10	<10
Fluoranthene	ug/l		<10	<10
pyrene	ug/l		<10	<10 👘
butylbenzylphthalate	ug/1		<10	<10
3,3-dichlorobenzidine	ug/l		<10	<10
benzo(a)anthracene	ug/l		<10	<10
chrysene	ug/l		<10	<10
bis(2-ethylhexyl)phthalate	ug/l	50	2(J)	3 (J)
Di-n-octyl phthalate	ug/1		<10	<10
benzo(b)fluoranthene	ug/l		<10	<10
benzo(k)fluoranthene	ug/l		<10	<10
benzo(a)pyrene	ug/l		<10	<10
Indeno(1,2,3-cd)pyrene	ug/l		<10	<10
dibenzo(a,h)anthracene	ug/l		<10	<10
benzo(g,h,i)perylene	ug/l		<10	<10
Number of TICS [*] Identified			1	0

* - Tentatively Identified Compounds

J = Result is an Estimated Result Below the Reporting Limit or a Tentatively Identified Compound

Volatile Matrix Spike/Matrix Spike Duplicate Recovery SED-3

	Spike	Sample	MS	MS	QC Limits
Compound	Added	Concentration	Concentration	% Recovery	Rec.
Units		ug/kg	ug/kg	%	%
1,1 Dichloroethene	79	0	74	93	59-172
Trichloroethene	79	0	80	101	62-137
Benzene	79	0	75	95 ·	66-142
Toluene	· 79	0	78	98	59-139
Chlorobenzene	79	0	86	108	60-133

	Spike		MSD MSD %		QC Limits		
Compound	Added	Concentration	Recovery	RPD	RPD	REC	
Units		ug/kg	%	%			
1,1 Dichloroethene	76	72	95	2	22	59-172	
Trichloroethene	76	75	99	2	24	62-137	
Benzene	76	73	96	1	21	66-142	
Toluene	76	76	100	2	21	59-139	
Chlorobenzene	76	85	112	4	21	60-133	

	T								-	
		BAGE STORE	8							

Duplicate Results/Matrix Spike Recoveries

	:		Sample	Duplicate		
Location	Parameter	Limit	Concentration	Concentration	RPD	
			mg/kg	mg/kg	%	
SED-3	Cyanide	20	<1.5	<1.5	<1	

		Control	Spiked Sample	Sample	Spike	%
Location	Parameter	Limit	Recovery	Result	Added	R
			%	mg/kg		
SED-3	Cyanide	75-125	330	10	250	132

Semi-Volatile Matrix Spike/Matrix Spike Duplicate Recovery SED-1

Compound	Spike Added	Sample Concentration	MS Concentration	MS % Recovery	QC Limits Rec.
Units		ug/kg	ug/kg	%	%
Phenol	2500	0	1000	40	26-90
2-Chlorophenol	2500	0.	1200	48	25-102
1,4-Dichlorobenzene	1667	0	750	45	28-104
N-nitroso-Di-n-propylamine	1667	0	820	49	41-126
1,2,4-Trichlorobenzene	1667	0	890	53	38-107
4-Chloro-3-methylphenol	2500	0	1400	56	26-103
Acenaphthene	1667	0	1000	60	31-137
4-Nitrophenol	2500	0	950	38	11-114
2,4-Dinitrotoluene	1667	0	940	56	28-89
Pentachlorophenol	2500	0	270	.11	17-109
Pyrene	1667	0	1700	102	35-142

-

	Spike	MSD	MSD %	%	QCI	imits
Compound	Added	Concentration	Recovery	RPD	RPD	REC
Units		ug/kg	%	%	%	%
Phenol	3788	1600	42	5	35	26-90
2-Chlorophenol	3788	1700	45	6	50	25-102
1,4-Dichlorobenzene	2525	1200	48	6	27	28-104
N-nitroso-Di-n-propylamine	2525	1200	48	2	38	41-126
1,2,4-Trichlorobenzene	2525	1300	51	4	23	38-107
4-Chloro-3-methylphenol	3788	2100	55	2	33	26-103
Acenaphthene	2525	1600	63	5	19	31-137
4-Nitrophenol	3788	1500	40	5	50	11-114
2,4-Dinitrotoluene	2525	1500	59	5	47	28-89
Pentachlorophenol	3788	440	12	9	47	17-109
Pyrene	2525	1900	75	31	36	35-142

Pesticide Matrix Spike/Matrix Spike Duplicate SED-1

Compound	Spike Added	Sample Concentration	MS Concentration	MS % Rec.	QC Limits Rec.
Units	ug/kg	ug/kg	ug/kg	%	%
gamma-BHC (Lindane)	16.0	0.0	10	62	46-127
Heptachlor	25.0	0.0	17	68	35-130
Aldrin	25.0	0.0	19	76	34-132
Dieldrin	50.0	0.13	34	68	31-134
Endrin	50.0	0.0	30	60	42-139
4,4'-DDT	50.0	0.0	24	48	23-134

	Spike MSD		MSD	%	QC Limits		
Compound	Added	Concentration	% Rec.	RPD	RPD	REC.	
Units	ug/kg	ug/kg	%	%	%	%	
gamma-BHC (Lindane)	16.0	10.0	62	0	50	46-127	
Heptachlor	25.0	18.0	72	6	31	35-130	
Aldrin	25.0	20.0	80	5	43	34-132	
Dieldrin	50.0	35.0	70	3	38	31-134	
Endrin	50.0	32.0	64	7	45	42-139	
4,4'-DDT	50.0	24.0	48	0	50	23-134	



Duplicate Results/Matrix Spike Recoveries

ł			Control	Sample	Duplicate	
Location	Parameter	Units	Limit	Concentration	Concentration	RPD
GW-4	Alkalinity	ug/l	20	330000	310000	6.2

Location	Parameter	Units	Control Limit	Spiked Sample Recovery	Sample Result	Spike Added	% R
GW-4	Ammonia	ug/l	75-125	1040	238	1000	80 ·
GW-4	COD	ug/l	75-125	25600	6300	20000	96
GW-4	Cyanide	ug/l	75-125	86	<10	100	86
GW-4	Chloride	ug/l	75-125	22800	4000	20000	94
GW-4	Sulfate	ug/l	75-125	1270000	1170000	100000	100
GW-4	TOC	ug/l	75-125	45000	2200	40000	107
MW-3	Alkalinity	ug/l	75-125	930000	330000	500000	120

Volatile Matrix Spike/Matrix Spike Duplicate Recovery GW-4

· .	Spike	Sample	MS	MS	QC Limits
Compound	Added	Concentration	Concentration	% Recovery	Rec.
Units		ug/l	ug/l	%	%
1,1 Dichloroethene	50	0.	45	90	61-145
Trichloroethene	50	0	60	120	71-120
Benzene	50	0	48	96	76-127
Toluene	50	0	49	98	76-125
Chlorobenzene	50	0	58	116	75-130

· ·

:

7E 1

1

	Spike	MSD MSD %		%	QC Limits		
Compound	Added	Concentration	Recovery	RPD	RPD	REC	
Units		ug/l	%	%			
1,1 Dichloroethene	50	45	90	0	14	61-145	
Trichloroethene	50	59	118	2	14	71-120	
Benzene	50	47	94	2	11	76-127	
Toluene	50	50	100	2	13	76-125	
Chlorobenzene	50	60	120	3	13	75-130	

-

Const.

10.

Semi-Volatile Matrix Spike/Matrix Spike Duplicate Recovery GW-4

Compound	Spike Added	Sample Concentration	MS Concentration	MS Ø Decement	QC Limits
Units	Auucu	ug/l	ug/l	% Recovery %	Rec.
Phenol	75	0	24	32	12-110
2-Chlorophenol	75	0	27	36	27-123
1,4-Dichlorobenzene	50	0	15	30	36-97
N-nitroso-Di-n-propylamine	50	0	18	36	41-116
1,2,4-Trichlorobenzene	50	0	17	34	39-98
4-Chloro-3-methylphenol	75	0	35	47	23-97
Acenaphthene	50	0	26	52	46-118
4-Nitrophenol	75	0	45	60	10-80
2,4-Dinitrotoluene	50	0	27	54	24-96
Pentachlorophenol	75	0	55	73	9-103
Pyrene	50	0	34	68	26-127

.

	Spike	MSD	MSD %	%	QC Limits		
Compound	Added	Concentration	Recovery	RPD	RPD	REC	
Units		ug/l	%	%	%	%	
Phenol	75	25	33	3	42	12-110	
2-Chlorophenol	75	30	40	11	40	27-123	
1,4-Dichlorobenzene	50	21	42	33	28	36-97	
N-nitroso-Di-n-propylamine	50	18	36	0	38	41-116	
1,2,4-Trichlorobenzene	50	23	46	30	28	39-98	
4-Chloro-3-methylphenol	75	36	48	2	42	23-97	
Acenaphthene	50	29	58	11	31	46-118	
4-Nitrophenol	75	42	56	· 7	50	10-80	
2,4-Dinitrotoluene	50	29	58	7	38	24-96	
Pentachlorophenol	75	48	64	13	50	9-103	
Pyrene	50	43	86	23	31	26-127	

Pesticide Matrix Spike/Matrix Spike Duplicate GW-4

	Spike	Sample	MS	MS	QC
Compound	Added	Concentration	Concentration	% Rec.	Limits Rec.
Units	ug/l	ug/l	ug/l	%	%
gamma-BHC (Lindane)	0.3	0.0	0.22	69	56-123
Heptachlor	0.5	0.0	0.35	70	40-131
Aldrin	0.5	0.0	0.39	78	40-120
Dieldrin	1.0	0.0	0.71	71	52-126
Endrin	1.0	0.0	0.67	67	56-121
4,4'-DDT	1.0	0.0	0.58	58	38-127

. (7

	Spike	MSD	MSD	%	QC Limits	
Compound	Added	Concentration	% Rec.	RPD	RPD	REC.
Units	ug/l	ug/l	%	%	%	%
gamma-BHC (Lindane)	0.3	0.2	69	0	15	56-123
Heptachlor	0.5	0.4	70	0	20	40-131
Aldrin	0.5	0.4	80	3	22	40-120
Dieldrin	1.0	0.8	75	5	18	52-126
Endrin	1.0	0.7	70	4	21	56-121
4,4'-DDT	1.0	0.6	60	3	27	38-127

Table A. Lindley South Landfill RI/FSInorganic ParametersSediment Samples

		Metals			Dupe
Parameter	Units	Criterion	SED-1	SED-7	SED-7
Date Received			11/15/96	11/15/96	11/15/96
Aluminum	mg/kg		18000	8190	13670
Antimony	mg/kg	2	<8.2	< 6.8	<6.8
Arsenic	mg/kg	6	29.1	7.9	13
Barium	mg/kg	86	172	45.8	72.7
Beryllium	mg/kg		1.4	0.46	0.85
Cadmium	mg/kg	0.6	< 0.65	<0.54	<0.54
Calcium	mg/kg		3250	3400	13850
Chromium	mg/kg	26	20.8	12.3	20.1
Cobalt	mg/kg		15.7	8.4	15
Copper	mg/kg	16	116	108	121
Iron	mg/kg	2.0 %	46700	25900	41790
Lead	mg/kg	31	36	19.6	26.9
Magnesium	mg/kg		3710	3410	5334
Manganese	mg/kg	460	1920	305	625
Mercury	mg/kg	0.15	< 0.14	< 0.11	<0.11
Nickel	mg/kg	16	25.5	21.2	35.6
Sodium	mg/kg		<397	<330	<330
Selenium	mg/kg		< 0.92	<0.76	<0.76
Silver	mg/kg	1	<1.2	< 0.97	<0.97
Potassium	mg/kg		1390	<413	867
Thallium	mg/kg		<2.4	<2.0	<2.0
Vanadium	mg/kg		19.5	2.9	9.3
Zinc	mg/kg	120	67.9	40.8	71.1
Molybdenum	mg/kg		NR	NR	NR
TOC	ug/g		38000	2750	

NR - Not Required

Table A. Lindley South Landfill RI/FSVolatile Organic CompoundsSurface Water Samples

Parameter	Units	SW-1	SW-2	SW-4	SW-7
Date Received		11/16/96	11/16/96	11/16/96	11/16/96
Date Anglyzed		11/18/96	11/18/96	11/18/96	11/20/96
Chloromethane	ug/l	< 10	< 10	<10	<10
Bromomethane	ug/l	< 10	< 10	< 10	< 10
Vinyl Chloride	ug/l	< 10	< 10	< 10	< 10
Chloroethane	ug/l	< 10	< 10	< 10	< 10
Methylene Chloride	ug/l	<10	< 10	<10	<10
Acetone	ug/l	< 10	< 10	< 10	<10
Carbon Disulfide	ug/l	<10	< 10	<10	<10
1,1-Dichloroethene	ug/l	<10	< 10	< 10	<10
1,1-Dichloroethane	ug/l	< 10	< 10	< 10	< 10
1,2-Dichloroethene - trans	ug/l	< 10	< 10	< 10	<10
Chloroform	ug/l	< 10	< 10	< 10	< 10
1,2-Dichloroethane	ug/l	< 10	< 10	< 10	<10
2-Butanone	ug/l	<10	< 10	< 10	<10
1,1,1-Trichloroethane	ug/l	<10	< 10	< 10	< 10
Carbon Tetrachloride	ug/l	< 10	< 10	< 10	<10
Bromodichloromethane	ug/l	< 10	< 10	< 10	< 10
1,2-Dichloropropane	ug/l	< 10	< 10	< 10	<10
cis-1,3-Dichloropropene	ug/l	<10	< 10	< 10	<10
Trichloroethene	ug/l	< 10	< 10	< 10	<10
Dibromochloromethane	ug/l	< 10	< 10	< 10	< 10
1,1,2-Trichloroethane	ug/l	<10	< 10	< 10	< 10
Benzene	ug/l	< 10	< 10	<10	< 10
trans-1,3-Dichloropropene	ug/l	<10	< 10	< 10	< 10
Bromoform	ug/l	<10	< 10	< 10	<10
4-Methyl-2-Pentanone	ug/1	<10	< 10	< 10	< 10
2-Hexanone	ug/l	<10	< 10	< 10	<10
Tetrachloroethane	ug/l	<10	< 10	< 10	< 10
1,1,2,2-Tetrachloroethane	ug/l	<10	< 10	< 10	< 10
Toluene	ug/l	<10	< 10	< 10	< 10
Chlorobenzene	ug/l	< 10	< 10	< 10	<10
Ethylbenzene	ug/l	< 10	< 10	< 10	<10
Styrene	ug/l	< 10	< 10	< 10	< 10
Xylenes (Total)	ug/l	< 10	< 10	< 10	<10
1,2-Dichloroethene-cis	ug/1	< 10	< 10	< 10	<10
Number of TICS* Identified		0	0	0	0

* - Tentatively Identified Compounds

Table B. Lindley South Landfill RI/FSInorganic ParametersSurface Water Samples

		Class C				
Parameter	Units	Standard/Guidance	SW-1	SW-2	SW-4	SW-7
pH			7.3	7.4	7.5	7.5
TDS	ug/l	500000	. 145000	105000	115000	123000
Aluminum	ug/l		405	131	230	167
Antimony	ug/l		< 30.4	<30.4	<30.4	<30.4
Arsenic	ug/l	190	< 5.2	< 5.2	<5.2	<5.2
Barium	'ug/l		24	21.1	30.8	22.6
Beryllium	ug/l	*2	<0.70	<0.70	< 0.70	<0.70
Cadmium	ug/l	*3	<2.4	<2.4	<2.4	<2.4
Calcium	ug/l		31800	30000	34900	33500
Chromium	ug/l	*4	<5.7	<5.7	<5.7	<5.7
Cobalt	ug/l	5	<8.7	<8.7	<8.7	<8.7
Copper	ug/l	*5	11.3	8.8	<5.8	< 5.8
Iron	ug/l	300	613	172	359	204
Lead	ug/l	*6	<2.3	<2.3	<2.3	<2.3
Magnesium	ug/l		8910	7340	8100	8110
Manganese	ug/l		29	39.5	95	18.6
Mercury	ug/l	0.2	< 0.08	< 0.08	< 0.08	< 0.08
Nickel	ug/l	*7	18.6	<11.8	14.4	16
Potassium	ug/l		17900	14000	14600	13500
Selenium	ug/l	1	<3.4	<3.4	<3.4	<3.4
Silver	ug/l	0.1	<4.3	<4.3	<4.3	<4.3
Sodium	ug/l		< 1840	< 1840	< 1840	<1840
Thallium	ug/l	8	<5.8	< 5.8	<5.8	< 5.8
Vanadium	ug/l	14	<8.1	<8.1	<8.1	<8.1
Zinc	ug/l	30	3.5	<2.0	2.8	<2.0
Boron	ug/l	10000				

1.

• •

*1 - Dependent upon sample temperature and pH (see reg)

*2 - 0.011 mg/l when hardness < 75 mg/l; 1.10 mg/l when hardness > 75 mg/l

*3 - exp(0.7852[ln(hardness)]-3.490)

*4 - exp(0.819[ln(hardness)]+1.561)

*5 - exp(0.8545[ln(hardness)]-1.465)

*6 - exp(1.266[ln(hardness)]-4.661)

*7 - exp(0.76[ln(hardness)]+1.06

Table A. Lindley South Landfill RI/FS **Volatile Organic Compounds Groundwater Samples**

·		Class GA						Dupe	
Parameter	Units	Standards	<u>GW-1</u>	<u>MW-1</u>	MW-2D	<u>MW-2S</u>	<u>MW-3</u>	<u>MW-3</u>	<u>MW-4</u>
Date Received			11/16/96	11/16/96	11/16/96	11/16/96	11/16/96	<u>11/16/96</u> 11/18/96	<u>11/16/96</u> 11/18/96
Date Analyzed			<u>11/18/96</u> <10	<u>11/18/96</u> <10	11/18/96	<u>11/18/96</u> <10	<u>11/18/96</u> <10	<10	<10
Chloromethane	ug/l				<10		<10	<10	<10
Bromomethane	ug/1		<10 <10	` <10 <10	<10 <10	<10 <10	<10	< 10	<10
Vinyl Chloride	ug/l						<10	<10	<10
Chloroethane	ug/l	5	<10	<10 <10	<10 <10	<10 <10	<10	< 10	<10
Methylene Chloride	ug/l	2	<10 <10	<10	<10 <10	<10	<10	< 10	<10
Acetone	ug/l					<10	<10	<10	<10
Carbon Disulfide	ug/l		<10	<10	<10		<10	<10	<10
1,1-Dichloroethene	ug/1		<10	<10	<10	<10 5 (J)	<10	<10	<10
1,1-Dichloroethane	ug/1		<10	<10	<10	<10	<10	<10	<10
1,2-Dichloroethene - trans	ug/l		<10	<10	<10	<10	<10	< 10	<10
Chloroform	ug/l		<10	<10	<10	<10	<10	<10	<10
1,2-Dichloroethane	ug/l		<10	<10	<10		<10	<10	<10
2-Butanone	ug/l		<10	<10	<10 <10	<10 <10	<10	< 10	<10
1,1,1-Trichloroethane	ug/l		<10	<10		<10	<10	< 10	<10
Carbon Tetrachloride	ug/l		<10	<10	<10		<10	< 10	<10
Bromodichloromethane	ug/l		<10	<10	<10	<10	<10	< 10	<10
1,2-Dichloropropane	ug/l		<10	<10	<10	<10		< 10	<10
cis-1,3-Dichloropropene	ug/l		<10	<10	<10	<10	<10		<10
Trichloroethene	ug/l		<10	<10	<10	<10	<10	<10	
Dibromochloromethane	ug/l		<10	<10	<10	<10	<10	<10	<10
1,1,2-Trichloroethane	ug/i		<10	<10	<10	<10	<10	<10	<10
Benzene	ug/l		<10	<10	<10	<10	<10	<10	<10
trans-1,3-Dichloropropene	ug/l		<10	<10	<10	<10	<10	<10	<10
Bromoform	ug/l		<10	<10	<10	<10	<10	<10	<10
4-Methyl-2-Pentanone	ug/l		<10	<10	<10	<10	<10	<10	<10
2-Hexanone	ug/l		<10	<10	<10	<10	<10	<10	<10
Tetrachloroethane	ug/l		<10	<10	<10	<10	<10	<10	<10
1,1,2,2-Tetrachloroethane	ug/l		<10	<10	<10	<10	<10	<10	<10
Toluene	ug/l		<10	<10	<10	<10	<10	<10	<10
Chlorobenzene	ug/l		<10	<10	<10	<10	<10	<10	<10
Ethylbenzene	ug/l		<10	<10	<10	<10	<10	<10	<10
Styrene	ug/1		<10	<10	<10	<10	<10	<10	<10
Xylenes (Total)	ug/l		<10	<10	<10	<10	<10	<10	<10
1,2-Dichloroethene-cis	ug/l		<10	<10	<10	<10	<10	<10	<10
Number of TICS* Identified			0	0	0	0	0	0	<u> </u>

and the second

* - Tentatively Identified Compounds I = _____t is a _____imate____ult B____the P____ting Limit or a _____totatively_Identified Compound

. :

7

.

: .

		Class GA	1					Dupe	
Parameter	Units	Standard/Guidance	GW-1	MW-1	MW-2D	MW-2S	MW-3	MW-3	MW-4
TDS	ug/l	500000	395000	198000	523000	1170000	465000		465000
Aluminum	ug/l		466	14300	391	441	24200	40800	310
Antimony	ug/l	3	<30.4	< 30.4	< 30.4	< 30.4	<30.4	<30.4	< 30.4
Arsenic	ug/l	25	< 5.2	< 5.2	31.8	8	24.7	29.4	<5.2
Barium	ug/l	1000	57.7	1410	221	285	2610	4090	99.5
Beryllium	.ug/l	3	<0.70	3.1	< 0.70	<0.70	6.9	9.7	<0.70
Cadmium	ug/l	10	<2.4	<2.4	<2.4	<2.4	<2.4	<2.4	<2.4
Calcium	ug/l		108000	199000	93500	241000	241000	390000	168000
Chromium	ug/l	50	< 5.7	34.7	< 5.7	<5.7	14.4	23.7	<5.7
Cobalt	ug/l		8.8	51.5	<8.7	<8.7	68.7	110	<8.7
Copper	ug/l	200	13.8	120	8.1	< 5.8	159	177	22
Iron	ug/l	300	964	42100	1000	4980	24600	41500	106
Lead	ug/l	25	16	2.5	4.5	2.8	87.1	163	2.7
Magnesium	ug/l	35000	37900	36400	32600	98000	103000	11190000	41800
Manganese	ug/l	300	1260	3890	815	3680	5480	9150	89
Mercury	ug/l	2	< 0.08	< 0.08	< 0.08	< 0.08	<0.08	0.41	< 0.08
Nickel	ug/l		16.5	97.7	12.1	41.8	51.7	74.5	13.4
Potassium	ug/l		28300	9850	69300	91800	28300	26500	11500
Selenium	ug/l	10	<3.4	<3.4	<3.4	<3.4	<3.4	<3.4	<3.4
Silver	ug/l	50	<4.3	<4.3	<4.3	<4.3	<4.3	<4.3	<4.3
Sodium	ug/l	20000	<1840	< 1840	<1840	<1840	4280	5690	< 1840
Thallium	ug/l	4	< 5.8	< 5.8	< 5.8	< 5.8	<5.8	< 5.8	< 5.8
Vanadium	ug/l		< 8.1	11.6	< 8.1	< 8.1	48.9	70.4	<8.1
Zinc	ug/l	300	6.5	114	13.2	<2.0	385	613	7.8
Boron	ug/l	1000							, , <u>, , , , , , , , , , , , , , , , , </u>

,

Table B. Lindley South Landfill RI/FSInorganic ParametersGroundwater Samples

NR - Not Required

:

Table A. Lindley South Landfill RI/FS Volatile Organic Compounds Residential Well Water Samples

D auraan adam	¥7-4-	RW-1	RW-3	RW-4	Dupe RW-4
Parameter	Units	<u> </u>	<u> </u>	11/16/96	11/16/96
L. · <u>Received</u>		11/20/96	<u> </u>	11/18/96	11/18/96
Des Analyzed		<10	<10	<10	<10
Chloromethane	ug/l	<10	<10	<10	<10
Bromomethane	ug/l	<10	<10	<10	<10
Vinyl Chloride	ug/1	<10	<10	<10	<10
Chloroethane	ug/1	<10	<10	<10	<10
Methylene Chloride	ug/l	<10	<10	< 10	<10
	ug/l	<10	<10	<10	<10
Carbon Disulfide	ug/l	<10	< 10	<10	<10
1,1-Dichloroethene	ug/l			<10	<10
1,1-Dichloroethane	ug/l	<10	<10	<10	<10
1,2-Dichloroethene - trans	ug/1	<10 <10	<10 <10	<10	<10
Chloroform	ug/l	1		<10	<10
1,2-Dichloroethane	ug/l	<10	<10	<10	<10
2-Butanone	ug/l	<10	<10	<10	<10
1,1,1-Trichloroethane	ug/l	<10	<10		<10
Carbon Tetrachloride	ug/l	<10	<10	< 10	
Bromodichloromethane	ug/l	<10	<10	<10	<10
1,2-Dichloropropane	ug/l	<10	< 10	<10	<10
cis-1,3-Dichloropropene	ug/l	<10	<10	<10	<10
Trichloroethene	ug/l	<10	<10	<10	<10
Dibromochloromethane	ug/l	<10	<10	<10	<10
1,1,2-Trichloroethane	ug/l	<10	<10	<10	<10
Benzene	ug/l	<10	<10	<10	<10
trans-1,3-Dichloropropene	ug/l	<10	<10	<10	<10
Bromoform	ug/l	<10	<10	<10	<10
4-Methyl-2-Pentanone	ug/l	<10	<10	<10	<10
2-Hexanone	ug/l	<10	<10	<10	<10
Tetrachloroethane	ug/l	<10	<10	< 10	<10
1,1,2,2-Tetrachloroethane	ug/l	<10	<10	< 10	<10
Toluene	ug/l	<10	<10	<10	<10
Chlorobenzene	ug/l	<10	<10	<10	<10
Ethylbenzene	ug/l	<10	<10	< 10	<10
Styrene	ug/l	<10	<10	<10	<10
Xylenes (Total)	ug/l	<10	<10	<10	<10
1,2-Dichloroethene-cis	ug/1	<10	<10	< 10	<10
Number of TICS* Identified		0	0	0	0

* - Tentatively Identified Compounds

Table B. Lindley South Landfill RI/FS Semivolatile Organic Compounds Residential Well Water Samples

٠

. •

₹.

		Class GA			Dupe	SIY
Parameter	Units	Standard/Guidance	<u>RW-1</u>	<u>RW-3</u>		<u>RW-4</u>
Date Received			11/16/96	11/16/96	11/16/96	11/16/96
Date Extracted		I	11/19/96	11/19/96	11/19/96	11/19/96
Date Analyzed			12/03/96	12/03/96	12/03/96	12/03/96
Phenol	ug/l		<10	<10	<10	<10
bis(2-chloroethyl)ether	ug/l		<10	<10	<10	<10
2-chlorophenol	ug/l		<10	<10	<10	<10
1,3-Dichlorobenzene	ug/l		<10	<10	<10	<10
1,4-Dichlorobenzene	ug/l		<10	<10	<10	<10
1,2-Dichlorobenzene	ug/l		<10	<10	<10	<10
2-methylphenol	ug/l		<10	<10	<10	<10
2,2-oxybis(1-chloropropane)	ug/l		<10	<10	<10	<10
4-methylphenol	ug/l		<10	<10	<10	<10
N-nitroso-di-n-proplyamine	ug/l		<10	<10	<10	<10
hexachloroethane	ug/l		<10	<10	<10	<10
nitrobenzene	ug/l		<10	<10	<10	<10
isophorone	ug/l		<10	<10	<10	<10
2-nitrophenol	ug/l		<10	<10	<10	<10
2,4-Dimethylphenol	ug/l		<10	<10	<10	<10
bis(2-chloroethoxy)methane	ug/l		<10	<10	<10	<10
2,4-dichlorophenol	ug/l		<10	<10	<10	<10
1,2,4-trichlorobenzene	ug/l		<10	<10	<10	<10
naphthalene	ug/l		<10	<10	<10	<10
4-chloroaniline	ug/l		<10	<10	<10	<10
hexachlorobutadiene	ug/l		<10	<10	<10	<10
4-chloro-3-methylphenol	ug/l		<10	<10	<10	<10
2-methylnaphthalene	ug/l		<10	<10	<10	<10
Hexachlorocyclopentadiene	ug/l		<10	<10	<10	<10
2,4,6-trichlorophenol	ug/l		<10	<10	<10	<10
2,4,5-trichlorophenol	ug/l		<25	<25	<25	<25
2-chloronaphthalene	ug/l		<10	<10	<10	<10
2-nitroaniline	ug/l		<25	<25	<25	<25
dimethyl phthalate	ug/l		<10	<10	<10	<10
acenaphthylene	ug/l		<10	<10	<10	<10
2,6-dinitrotoluene	ug/l		<10	<10	<10	<10
3-nitroaniline	ug/l		<25	<25	<25	<25
acenaphthene	ug/l		<10	<10	<10	<10

Table B. Lindley South Landfill RI/FSSemivolatile Organic CompoundsResidential Well Water Samples

						(6
<u></u>		Class GA			Dupe	SIY
Parameter	Units	Standard/Guidance	RW-1	RW-3	<u>RW-4</u>	RW-
Date Received			11/16/96	11/16/96	11/16/96	11/16/5
Date Extracted			11/19/96	11/19/96	11/19/96	11/19/96
Date Analyzed		ing at an and	12/03/96	12/03/96	12/03/96	12/03/96
2,4-dinitrophenol	ug/l		<25	<25	<25	<25
4-nitrophenol	ug/1		<25	<25	<25	<25
dibenzofuran	ug/l		<10	<10	<10	<10
2,4-dinitrotoluene	ug/l		<10	<10	<10	<10
diethylphthalate	ug/l	50	<10	<10	<10	<10
4-chlorophenyl-phenylether	ug/l		<10	<10	<10	<10
fluorene	ug/l		<10	<10	<10	<10
4-nitroaniline	ug/l		<25	<25	<25	<25
4,6-dinitro-2-methylphenol	ug/l		<25	<25	<25	<25
N-Nitrosodiphenylamine	ug/l		<10	<10	<10	<10
4-bromophenyl-phenylether	ug/1		<10	<10	<10	<10
hexachlorobenzene	ug/l		<10	<10	<10	<10
pentachlorophenol	ug/l		<25	<25	<25	<25
phenanthrene	ug/l		<10	<10	<10	<10
anthracene	ug/l		<10	<10	<10	<10
carbozole	ug/l		<10	<10	<10	<10
Di-n-butylphthalate	ug/l		<10	<10	<10	70 1
Fluoranthene	ug/l		<10	<10	<10	<10
pyrene	ug/l		<10	<10	<10	<10
butylbenzylphthalate	ug/l		<10	<10	<10	<10
3,3-dichlorobenzidine	ug/l		<10	<10	<10	<10
benzo(a)anthracene	ug/l		<10	<10	<10	<10
chrysene	ug/l		<10	<10	<10	<10
bis(2-ethylhexyl)phthalate	ug/l	50	<10	2 (B, J)	6 (B, J)	3 (B, J) -
Di-n-octyl phthalate	ug/l		<10	<10	<10	<10
benzo(b)fluoranthene	ug/l		<10	<10	<10	<10
benzo(k)fluoranthene	ug/l		<10	<10	<10	<10
benzo(a)pyrene	ug/l		<10	<10	<10	<10
Indeno(1,2,3-cd)pyrene	ug/l		<10	<10	<10	<10
dibenzo(a,h)anthracene	ug/l		<10	<10	<10	<10
benzo(g,h,i)perylene	ug/l		<10	<10	<10	<10
Number of TICS* Identified			1	0	1	0

199 199

* - Tentatively Identified Compounds

٠.

J = Result is an Estimated Result Below the Reporting Limit or a Tentatively Identified Compound

Table A. Lindley South Landfill RI/FS Volatile Organic Analysis Trip Blank Samples

	TT 1 /	Trip
Parameter	Units	Blank
Date Received		11/16/96
Date Analyzed		11/18/96
Chloromethane	ug/l	<10
Bromomethane	ug/l	<10
Vinyl Chloride	ug/l	<10
Chloroethane	ug/l	<10
Methylene Chloride	ug/l	<10
Acetone	ug/l	<10
Carbon Disulfide	ug/l	<10
1,1-Dichloroethene	ug/l	<10
1,1-Dichloroethane	ug/l	<10
1,2-Dichloroethene - trans	ug/l	<10
Chloroform	ug/l	<10
1,2-Dichloroethane	ug/l	<10
2-Butanone	ug/l	<10
1,1,1-Trichloroethane	ug/l	<10
Carbon Tetrachloride	ug/l	<10
Bromodichloromethane	ug/l	<10
1,2-Dichloropropane	ug/1	<10
cis-1,3-Dichloropropene	ug/l	<10
Trichloroethene	ug/l	<10
Dibromochloromethane	ug/l	<10
1,1,2-Trichloroethane	ug/l	<10
Benzene	ug/l	<10
trans-1,3-Dichloropropene	ug/l	<10
Bromoform	ug/l	<10
4-Methyl-2-Pentanone	ug/l	<10
2-Hexanone	ug/1	<10
Tetrachloroethane	ug/l	<10
1,1,2,2-Tetrachloroethane	ug/l	<10
Toluene	ug/l	<10
Chlorobenzene	ug/l	<10
Ethylbenzene	ug/l	<10
Styrene	ug/l	<10
Xylenes (Total)	ug/l	<10
1,2-Dichloroethene-cis	ug/l	<10
Number of TICS* Identified		0

* - Tentatively Identified Compounds

. ..

Lindley South Landfill RI/FS Groundwater Sampling Point MW-3 Field Duplicate Comparison

			Dupe	%RPD
Parameter	Units	MW-3	MW-3	
TDS	ug/l	465000	· ·	NA
Aluminum	ug/l	24200	40800	25.54
Antimony	ug/l	<30.4	<30.4	NA
Arsenic	ug/l	24.7	29.4	8.69
Barium	ug/l	2610	4090	22.09
Beryllium	ug/l	6.9	9.7	16.87
Cadmium	ug/l	<2.4	<2.4	NA
Calcium	ug/l	241000	390000	23.61
Chromium	ug/l	14.4	23.7	24.41
Cobalt	ug/1	68.7	110	23.11
Copper	ug/l	159	177	5.36
Iron	ug/l	24600	41500	25.57
Lead	ug/l	87.1	163	30.35
Magnesium	ug/l	103000	119000	7.21
Manganese	ug/l	5480	9150	25.09
Mercury	ug/l	< 0.08	0.41	100.00
Nickel	ug/l	51.7	74.5	18.07
Potassium	ug/l	28300	26500	3.28
Selenium	ug/l	<3.4	<3.4	NA
Silver	ug/l	<4.3	<4.3	NA
Sodium	ug/l	4280	5690	14.14
Thallium	ug/l	<5.8	< 5.8	NA
Vanadium	ug/l	48.9	70.4	18.02
Zinc	ug/l	385	613	22.85
Boron	ug/l			NA
Volatile Organic Compounds (1)	ug/l	< 10	< 10	NA

(1) Note: All of the volatile organic compounds were identified below their respective method detection limits for both the original sample and field duplicate sample.

Lindley South Landfill - RI/FS Sediment Sampling Point SED-7 Field Duplicate Comparison

·		Ţ	dupe	%RPD
Parameter	Units	SED-7	SED-7	
Aluminum	mg/kg	8190	13670	50.10
Antimony	mg/kg	< 6.8	<6.8	NA
Arsenic	mg/kg	7.9	13	49.20
Barium	mg/kg	45.8	72.7	45.50
Beryllium	mg/kg	0.46	0.85	59.50
Cadmium	mg/kg	< 0.54	< 0.54	NA
Calcium	mg/kg	3400	13850	121.20
Chromium	mg/kg	12.3	20.1	48.30
Cobalt	mg/kg	8.4	15	56.90
Copper	mg/kg	108	121	11.30
Iron	mg/kg	25900	41790	47.10
Lead	mg/kg	19.6	26.9	31.30
Magnesium	mg/kg	3410	5334	44.00
Manganese	mg/kg	305	625	68.90
Mercury	mg/kg	<0.11	<0.11	NA
Nickel	mg/kg	21.2	35.6	50.60
Sodium	mg/kg	<330	<330	NA
Selenium	mg/kg	<0.76	< 0.76	NA
Silver	mg/kg	<0.97	<0.97	NA
Postassium	mg/kg	<413	867	200.00
Thallium	mg/kg	<2.0	<2.0	NA
Vanadium	mg/kg	2.9	9.3	104.80
Zinc	mg/kg	40.8	71.1	54.20
TOC	ug/g	2750	2784	1.20

÷.

Lindley South Landfill RI/FS Residential Sampling Point RW-4 Field Duplicate Comparison

· · · · · · · · · · · · · · · · · · ·		<u></u>	Dupe	% RPD
Parameter	Units	<u>RW-4</u>	<u>RW-4</u>	
Hardness	mg CaCO3/1			
Total Cyanide	ug/1	<10	<10	NA
Aluminum	ug/1	239	215	5.29
Antimony	ug/l	<30.4	<30.4	NA
Arsenic	ug/l	<5.2	<5.2	NA
Barium	ug/l	2180	2110	1.63
Beryllium	ug/l	< 0.70	< 0.70	NA
Cadmium	ug/l	<2.4	<2.4	NA
Calcium	ug/l	90600	87900	1.51
Chromium	ug/l	<5.7	<5.7	NA
Cobalt	ug/l	<8.7	<8.7	NA
Copper	ug/l	13.2	6.3	35.38
Iron	ug/l	994	968	1.33
Lead	ug/l	3.7	3.2	7.25
Magnesium	ug/l	29500	28500	1.72
Manganese	ug/l	227	220	1.57
Mercury	ug/l	0.12	< 0.08	33.33
Nickel	ug/l	14	<11.8	15.71
Potassium	ug/l	54200	53000	1.12
Selenium	ug/l	<3.4	<3.4	NA
Silver	ug/l	<4.3	<4.3	NA
Sodium	ug/l	<1840	<1840	NA
Thallium	ug/1	< 5.8	<5.8	NA
Vanadium	ug/l	<8.1	< 8.1	NA
Zinc	ug/1	35.1	23.6	19.59
Boron	ug/l			NA
PCBs	ug/l	*	*	NA
Volatile Organic Compounds	ug/l	*	*	NA
Di-n-butylphthalate	ug/1	<10	7 (J)	17.65
bis(2-ethylhexyl)phthalate	ug/l	6 (B, J)	3 (B, J)	33.33

* Note all of the samples analyzed for PCBs and Volatile Organic Compounds were identified below their respective method detection limits for the both the original and field duplicate samples

Laboratory Duplicate Results MW-1

	Control	RPD
Parameter	Limit	·
Units		%
Aluminum		0.1
Antimony		NA
Arsenic		200.0
Barium		0.4
Beryllium		· 0.0
Cadmium		NA
Calcium		0.3
Chromium	10.0	15.4
Cobalt	50.0	8.2
Copper	25.0	3.2
Iron		0.4
Lead	3.0	189.5
Magnesium		0.3
Manganese		0.3
Mercury		NA
Nickel	40.0	3.0
Sodium	5000.0	0.3
Selenium		NA
Silver		NA
Potassium		NA
Thallium		NA
Vanadium		30.3
Zinc		4.9

NA - Cannot perform a relative percent difference on values which are

below method detection limits.

Ĺ

Laboratory Duplicate Results RW-3

	Control	RPD
Parameter	Limit	
Units		%
Aluminum	200	1.6
Antimony		NA
Arsenic		NA
Barium		0.0
Beryllium		NA
Cadmium		NA
Calcium		1.4
Chromium		NA
Cobalt		NA
Copper	25.0	124.5
Iron	100.0	7.4
Lead	3.0	200.0
Magnesium		0.5
Manganese		6.4
Mercury		NA
Nickel		200.0
Sodium		0.3
Selenium		NA
Silver		NA
Potassium		NA
Thallium		NA
Vanadium		NA
Zinc		23.2

NA - Cannot perform a relative percent difference on values which are below method detection limits.

Matrix Spike Recoveries SED-7

······			Spiked Sample	Sample	%
Location	Parameter	Units	Recovery	Result	R
SED-7	Aluminum	mg/kg	1040		
SED-7	Antimony	mg/kg	< 6.8	<6.8	0
SED-7	Arsenic	mg/kg	24.2	7.9	182.3
SED-7	Barium	mg/kg	520	45.8	105.6
SED-7	Beryllium	mg/kg	12.1	0.46	103.3
SED-7	Cadmium	mg/kg	12.7	< 0.54	112.7
SED-7	Calcium	mg/kg			
SED-7	Chromium	mg/kg	63.6	12.3	114.2
SED-7	Cobalt	mg/kg	128	8.4	106.4
SED-7	Copper	mg/kg	154	108	80.8
SED-7	Iron	mg/kg	37028	25900	4973
SED-7	Lead	mg/kg	159	19.6	124
SED-7	Magnesium	mg/kg			
SED-7	Manganese	mg/kg	660	305	316.2
SED-7	Mercury	mg/kg	0.71	< 0.11	127.4
SED-7	Nickel	mg/kg	145	21.2	109.9
SED-7	Sodium	mg/kg			
SED-7	Selenium	mg/kg	2.3	< 0.76	101.9
SED-7	Silver	mg/kg	< 0.97	< 0.97	0
SED-7	Potassium	mg/kg			
SED-7	Thallium	mg/kg	11.4	<2.0	126.7
SED-7	Vanadium	mg/kg	122	2.9	105.7
SED-7	Zinc	mg/kg	167	40.8	112.7
SED-7	Molybdenum	mg/kg	NR	NR	NR
SED-7	TOC	ug/g	10452	2750	128

242

4

ŧ.

Duplicate Results/Matrix Spike Recoveries

Location	Parameter	Units	Contrel Limit	RPD
RW-3	Cyanide	ug/l	20 🛔	
MW-1	TDS	ug/l	20	5.2
SW-7	pH	ug/l	20 🗐	<1

r T			Control	Spike	%
	D	T . 1 4.4	Limit	Added	R
Location	Parameter	Units	75-125	100	89
RW-3	Cyanide	ug/l	75-12	2000	45.7
MW-1	Aluminum	. ug/l	75-125	500	57.5
MW-1	Antimony	ug/l	75-125	40	107.2
MW-1	Arsenic Barium	ug/1	75-125	2000	90.9
MW-1	Beryllium	ug/l	75-125	50	106.4
MW-1 MW-1	Cadmium	ug/1	75-125	50	106.9
MW-1 MW-1	Calcium	ug/l ug/l	75-125		100.5
MW-1 MW-1	Chromium	ug/l	75-125	200	105.5
MW-1 MW-1	Cobalt	ug/l	75-125	500	104.3
MW-1 MW-1		ug/l	75-125	250	91.2
MW-1 MW-1	Copper Iron		75-125	1000	-238.3
MW-1 MW-1	Lead	ug/1	75-125	20	668.8
MW-1 MW-1		ug/1	75-125	20	000.0
1	Magnesium	ug/l	75-125	500	27.6
MW-1	Manganese	ug/l	75-125	1	33.2
MW-1	Mercury Nickel	ug/1	75-125	500	102.8
MW-1 MW-1		ug/l	75-125	300	102.0
MW-1 MW-1	Sodium Selenium	ug/l	75-125	10	96
MW-1 MW-1	Silver	ug/l	75-125	50	57.6
MW-1 MW-1	Potassium	ug/l	75-125	50	57.0
	Thallium	ug/l	75-125	50	96
MW-1	Vanadium	ug/l	75-125	500	96.8
MW-1 MW-1	Zinc	ug/l	75-125	500	94.3
1	Aluminum	ug/l	75-125	2000	98.9
RW-3		ug/l	75-125	500	108.3
RW-3	Antimony	ug/l	······································	40	108.5
RW-3	Arsenic	ug/l	75-125	80933	
RW-3	Barium	ug/l	75-125	2000	101.8
RW-3	Beryllium	ug/l	75-125	50	116.7
RW-3	Cadmium	ug/l	75-125	50	140.4
RW-3	Calcium	ug/l	75-125		110 5
RW-3	Chromium	ug/l	75-125	200	113.5
RW-3	Cobalt	ug/l	75-125	500	111.8
RW-3	Copper	ug/l	75-125	250	111.9
RW-3	Iron	ug/l	75-125	1000	110
RW-3	Lead	ug/l	75-125	20	79.4
RW-3	Magnesium	ug/l	75-125		100.1
RW-3	Manganese	ug/l	75-125	500	108.4
RW-3	Mercury	ug/l	75-125		91.8
RW-3	Nickel	ug/l	75-125	500	113.4
RW-3	Sodium	ug/l	75-125		
RW-3	Selenium	ug/l	75-125	10	70
RW-3	Silver	ug/l	75-125	50	97.3
RW-3	Potassium	ug/l	75-125		
RW-3	Thallium	ug/l	75-125	50	90.4
RW-3	Vanadium	ug/l	75-125	500	114
RW-3	Zinc	ug/l	75-125	500	111.3

Pesticide Matrix Spike/Matrix Spike Duplicate RW-3

Compound	Spike Added	Sample Concentration	MS Concentration	MS % Rec.	QC Limits Rec.
Units	ug/l	ug/l	ug/l	%	96
gamma-BHC (Lindane)	0.5	0.0	0.42	84	56-123
Heptachlor	0.5	0.0	0.43	86	40-131
Aldrin	0.5	0.0	0.41	82	40-120
Dieldrin	1.0	0.0	0.86	86	52-126
Endrin	1.0	0.0	0.88	88	56-121
4,4'-DDT	1.0	0.0	0.88	88	38-127

. (7

	Spike	MSD	MSD	%	QC	Limits
Compound	Added	Concentration	% Rec.	RPD	RPD	REC.
Units	ug/l	ug/l	%	%	%	%
gamma-BHC (Lindane)	0.5	0.41	82	2	15	56-123
Heptachlor	0.5	0.38	76	12	20	40-131
Aldrin	0.5	0.41	82	0	22	40-120
Dieldrin	1.0	0.89	89	3	18	52-126
Endrin	1.0	0.99	99	12	21	56-121
4,4'-DDT	1.0	0.85	85	3	27	38-127

Compound	Spike Added	Sample Concentration	MS Concentration	MS % Recovery	QC Limits
Units	•	ug/l	ug/l		Rec.
Phenol	75	0	47	%	%
2-Chlorophenol	75	o ·		63	12-110
1,4-Dichlorobenzene	50	0	47	63	27-123
N-nitroso-Di-n-propylamine	50	U	27	54	36-97
1,2,4-Trichlorobenzene		0	26	52	41-116
4-Chloro-3-methylphenol	50	0	33	66	39-98
	75	0	60	80	
Acenaphthene	50	0	35		23-97
4-Nitrophenol	75	0	57	70	46-118
2,4-Dinitrotoluene	50	0		76	10-80
Pentachlorophenol	75	-	49	98	24-96
Pyrene	50	0	65	87	9-103
		0	50	100	26-127

. .

*

Semi-Volatile Matrix Spike/Matrix Spike Duplicate Recovery RW-3

and the c

. .

Compound	Spike Added	MSD Concentration	MSD %	%	QC	Limits
Units			Recovery	RPD	RPD	REC
Phenol	75	ug/l	%	%	%	%
	75	45	60	5	42	
2-Chlorophenol	75	50	67	6		12-110
1,4-Dichlorobenzene	50	32	64	-	40	27-123
N-nitroso-Di-n-propylamine	50	25		17	28	36-97
1,2,4-Trichlorobenzene	50	38	50	4	38	41-116
4-Chloro-3-methylphenol	75		76	14	28	39-98
Acenaphthene		54	72	11	42	23-97
-	50	35	70	0	31	ana ang ang ang ang ang ang ang ang ang
4-Nitrophenol	75	63	83	9		46-118
2,4-Dinitrotoluene	50	46	92	. 9	50	10-80
Pentachlorophenol	75	61		6	38	24-96
Pyrene	50		81	7	50	9-103
	50	51	102	2	31	26-127

Volatile Matrix Spike/Matrix Spike Duplicate Recovery RW-3

	Spike	Sample	MS	MS	QC Limits
Compound	Added	Concentration	Concentration	% Recovery	Rec.
Units		ug/l	ug/l	%	%
1,1 Dichloroethene	50	0	62	124	61-145
Trichloroethene	50	. 0	53	106	71-120
Benzene	50	0	56	112	76-127
Toluene	50	0	52	104	76-125
Chlorobenzene	50	0	55	110	75-130

. i ,

	Spike	MSD	MSD %	%	QCI	Limits
Compound	Added	Concentration	Recovery	RPD	RPD	REC
Units		ug/l	%	%		•
1,1 Dichloroethene	50	64	128	3.2	14	61-145
Trichloroethene	50	56	112	5.5	14	71-120
Benzene	50	58	116	3.5	11	76-127
Toluene	50	55	110	5.6	13	76-125
Chlorobenzene	50	57	114	3.6	13	75-130

Volatile Matrix Spike/Matrix Spike Duplicate Recovery MW-1

	Spike	Sample	MS	MS	QC Limits
Compound	Added	Concentration	Concentration	% Recovery	Rec.
Units		ug/l	ug/l	%	%
1,1 Dichloroethene	50	0	57	114	61-145
Trichloroethene	50	0	51	102	71-120
Benzene	50	0	53	106	76-127
Toluene	50	0	50	100	76-125
Chlorobenzene	50	0	52	104	75-130

.

	Spike	MSD	MSD %	. %	QC L	imits
Compound	Added	Concentration	Recovery	RPD	RPD	REC
Units		ug/l	%	%		
1,1 Dichloroethene	50	57	114	0	14	61-145
Trichloroethene	50	52	104	2	14	71-120
Benzene	50	55	110	4	11	76-127
Toluene	50	51	102	2	13	76-125
Chlorobenzene	50	54	108	4	13	75-130

Appendix C

Excavation Work Plan

Lindley South Landfill Steuben County, New York

Excavation Work Plan

March 2013

Lindley South Landfill Steuben County, New York

Excavation Work Plan

March 2013

Prepared for:

Steuben County Department of Public Works Bath, New York

Prepared by: Barton & Loguidice, P.C. Engineers • Environmental Scientists • Planners • Landscape Designers 290 Elwood Davis Road P. O. Box 3107 Syracuse, New York 13220

Table of Contents

<u>Sectio</u>	on Page
1.0	Notification1
2.0	Soil Screening Methods
3.0	Stockpile Methods5
4.0	Materials Excavation and Load Out6
5.0	Materials Transport Off-Site7
6.0	Materials Disposal Off-Site9
7.0	Materials Reuse On-Site
8.0	Fluids Management11
9.0	Cover System Restoration12
10.0	Backfill from Off-Site Sources13
11.0	Stormwater Pollution Prevention14
12.0	Contingency Plan16
13.0	Community Air Monitoring Plan17 13.1 Air Monitoring Procedures17
14.0	Odor Control Plan21
15.0	Dust Control Plan22
16.0	Other Nuisances

<u>Tables</u>

Table 1. M	Ionitoring Protocols and	Contaminant Action	Levels20
------------	--------------------------	---------------------------	----------

1.0 Notification

At least 7 days prior to the start of any activity that is anticipated to encounter remaining contamination, the site owner or their representative will notify the Department provided that such advance notice will not be required in the event of an emergency and as long as a follow-up description of the work is provided within 48 hours. This notification will be made to the most current NYSDEC Project Manager. At this time it is the following:

Valerie Woodward Engineering Geologist 625 Broadway, 12th Floor Albany, New York 12233-7016

Bart Putzig, P.E. Regional Hazardous Waste Remediation Engineer NYSDEC Region 8 6274 Avon-Lima Road Avon, New York 14414-9519

This notification will include:

- A detailed description of the work to be performed, including the location and areal extent, plans for site re-grading, intrusive elements or utilities to be installed below the soil cover, estimated volumes of contaminated soil to be excavated and any work that may impact an engineering control;
- A summary of environmental conditions anticipated in the work areas, including the nature and concentration levels of contaminants of concern, potential presence of grossly contaminated media, and plans for any pre- construction sampling;
- A schedule for the work, detailing the start and completion of all intrusive work;
- A summary of the applicable components of this EWP;

- A statement that the work will be performed in compliance with this EWP and 29 CFR 1910.120;
- A copy of the contractor's health and safety plan, in electronic format;
- Identification of disposal facilities for potential waste streams;
- Identification of sources of any anticipated backfill, along with all required chemical testing results.

2.0 Soil Screening Methods

Excavated soils are only believed to be from cap repair activities from areas with the landfill cap area. Excavated soils will undergo instrument based and field identification screening. Instrument based screening will consist of utilizing a photoionization detector (PID), and field identification screening will be based on visual and olfactory observations. Screening will be conducted from the excavator bucket on successive 2-foot lifts of soil removed from the excavation. This soil will be segregated as follows:

- Material that requires analytical testing:
 - Soils generated from areas anticipated to contain remaining contamination with PID readings equal or greater to 50 ppm or that exhibit potential contamination through field identification screening. All soil that requires testing will be stockpiled in accordance with Section 3.0.
- Material that requires off-site disposal under the criteria identified in Section 7.0:
 - Soils that required analytical testing based on the results of instrument based and field identification screening and were determined to have contaminant concentrations in excess of Part 375 Protection of Groundwater Standards. Sampling and analytical testing will be conducted as outlined in Section 7.0.
- Material that can be returned to the subsurface under the criteria identified in Section 7.0:
 - Soil for which PID readings were less than 50 ppm and did not exhibit signs of contamination through field identification screening
 - Soils that were tested and had concentrations less than Part 375
 Protection of Groundwater Standards. These soils must be

replaced in- kind, and not at a different depth from which they were removed.

Soils outside of the "Limits of Remaining Contamination" shown on Figure 2 in the SMP can be assumed to be clean. Instrument based screening is not required to be conducted in areas outside of the "Limits of Remaining Contamination". However, if field identification screening identifies new areas of contamination, then testing will be conducted as outlined above.

3.0 Stockpile Methods

Soil stockpiles will be continuously encircled with a berm and/or silt fence. Straw bales will be used as needed near catch basins, surface waters and other discharge points.

Stockpiles will be kept covered at all times with minimum 6-mil reinforced plastic sheeting, and covered with the same. The cover will be weighted with sandbags, tires, rope, or other means which do not penetrate the membrane. Stockpiles will be routinely inspected and damaged covers will be promptly replaced.

Stockpiles will be inspected at a minimum once each week and after every storm event. Results of inspections will be recorded in a logbook and maintained at the site and available for inspection by NYSDEC.

4.0 Materials Excavation and Load Out

A qualified environmental professional or person under their supervision will oversee all invasive work from areas anticipated to contain contamination and the excavation and load-out of all material that requires testing as outlined in Section 2.0.

The owner of the property and its contractors are solely responsible for safe execution of all invasive and other work performed under this Plan. The presence of utilities and easements on the site will be investigated prior to the start of subsurface work. Dig Safely NY will be contacted in accordance with State and Local utility clearance requirements. It will be determined whether a risk or impediment to the planned work under this SMP is posed by utilities or easements on the site.

Loaded vehicles leaving the site will be appropriately lined, tarped, securely covered, manifested, and placarded in accordance with appropriate Federal, State, local, and NYSDOT requirements (and all other applicable transportation requirements).

Locations where vehicles enter or exit the site shall be inspected daily for evidence of off-site soil tracking.

5.0 Materials Transport Off-Site

All transport of materials will be performed by licensed haulers in accordance with appropriate local, State, and Federal regulations, including 6 NYCRR Part 364. Haulers will be appropriately licensed and trucks properly placarded. Copies of operating permits for the waste disposal facility; waste transporter permits for all vehicles utilized for transporting; sampling and analysis requirements of the disposal facility; and the certified scale house weigh tickets will be required to be submitted.

Material transported by trucks exiting the site will be secured with tight-fitting covers. Loose-fitting canvas-type truck covers will be prohibited. If loads contain wet material capable of producing free liquid, truck liners will be used. Truck transport routes are as follows:

To get to New Bath Landfill:

٠	Depart Gibson Road toward Stowell Road	0.7 miles
•	Turn Left onto Clendenning Road/ CR-5	2.4 miles
•	Take ramp left and follow signs for US-15 North	5.7 miles
•	Take ramp left for RT-86 West toward Rochester	19.4 miles
•	At exit 38, take ramp right for RT-54 toward Hammondsport/ Bath	0.2 miles
•	Turn right onto RT-54/ W Washington St	0.1 miles
•	Bear right onto W Morris Street	0.4 miles
•	Turn right onto Railroad Avenue	292 feet
•	Road name changes to Cohocton Street	0.1 miles
•	Turn right onto Cameron St/ CR-10	1.7 miles
•	Turn right onto Turnpike Road arrive at New Bath Landfill	79 Feet

All trucks loaded with site materials will exit the vicinity of the site using only approved truck routes. Additional caution must be exercised, and any spills must be promptly managed and remedied. This is the most appropriate route and takes into account: (a) limiting transport through residential areas and past sensitive sites; (b) use of city mapped truck routes; (c) prohibiting off-site queuing of trucks entering the facility; (d) limiting total distance to major highways; (e) promoting safety in access to highways; and (f) overall safety in transport.

Trucks will be prohibited from stopping and idling in the neighborhood outside the project site.

Egress points for truck and equipment transport from the site will be kept clean of dirt and other materials during site remediation and development.

Queuing of trucks will be performed on-site in order to minimize offsite disturbance. Off-site queuing will be prohibited.

6.0 Materials Disposal Off-Site

All material that is deemed to require off-site disposal as determined by methods outlined in Section 2.0 will be transported and disposed in accordance with all local, State (including 6NYCRR Part 360) and Federal regulations. Based upon the site history and investigation to date, it is unlikely that on-site soils contain hazardous waste characteristics. However, contractors working on the site shall be responsible for assessing material coming out of the ground and making hazardous waste determinations pursuant to State and Federal regulations. All soil waste characterization testing will be provided prior to offsite disposal of any soil. If disposal of soil/fill from this site is proposed for unregulated off-site disposal (i.e. clean soil removed for development purposes), a formal request with an associated plan will be made to the NYSDEC. Unregulated off-site management of materials from this site will not occur without formal NYSDEC approval.

Off-site disposal locations for excavated soils will be identified in the preexcavation notification. This will include estimated quantities and a breakdown by class of disposal facility if appropriate, i.e. hazardous waste disposal facility, solid waste landfill, petroleum treatment facility, C/D recycling facility, etc. Actual disposal quantities and associated documentation will be reported to the NYSDEC in the Periodic Review Report. This documentation will include: waste profiles, test results, facility acceptance letters, manifests, bills of lading and facility receipts.

7.0 Materials Reuse On-Site

All material requiring testing, as outlined in Section 2.0, that is generated from areas within the landfill cap area shall be sampled and analyzed by an analytical laboratory approved by NYSDEC if determined to be reused. Results shall be compared to NYSDEC Part 375 Protection of Groundwater Standards to determine suitability for on-site reuse. Samples shall be collected in accordance with DER-10 and analysis shall be the full list of analytes (TCL volatiles and semi-volatiles) contained in NYSDEC Part 375 at the time of excavation. All excavated soil shall be stockpiled as described in Section 3.0 pending analysis or reuse.

Soil generated from below the landfill cap from repair measures can be replaced in-kind as long as engineering/institutional controls are in-place without regard for whether concentrations would exceed Part 375 Protection of Groundwater Standards.

Soil generated from areas outside of the "Limits of Remaining Contamination" are assumed to be clean, and can be reused without additional testing as long as there are no signs of contamination through field identification screening. Any structural demolition material proposed for reuse on-site will be sampled for asbestos and the results will be reported to the NYSDEC for acceptance. Concrete crushing or processing on-site will not be performed without prior NYSDEC approval. Organic matter (wood, roots, stumps, etc.) or other solid waste derived from clearing and grubbing of the site will not be reused on-site.

8.0 Fluids Management

All liquids to be removed from the site, including excavation dewatering and groundwater monitoring well purge and development waters, will be handled, transported and disposed in accordance with applicable local, State, and Federal regulations. Dewatering, purge and development fluids will not be recharged back to the land surface or subsurface of the site, but will be managed off-site.

Discharge of water generated during large-scale construction activities to surface waters (i.e., a local pond, stream or river) will be performed under a SPDES permit.

9.0 Cover System Restoration

After the completion of any invasive activities the cover system will be restored in a manner that complies with the Site Management Plan. The demarcation layer, consisting of orange snow fencing material or equivalent material will be replaced to provide a visual reference to the top of the 'Anticipated Remaining Contamination Zone', the zone that requires adherence to special conditions for disturbance of areas anticipated to contain remaining contaminated soils defined in this Site Management Plan. If the type of cover system changes from that which exists prior to the excavation, this will constitute a modification of the cover element of the remedy and the upper surface of the "Anticipated Remaining Contamination Zone". A figure showing the modified surface will be included in the subsequent Periodic Review Report and in any updates to the Site Management Plan.

10.0 Backfill from Off-Site Sources

All materials proposed for import onto the site will be approved by the qualified environmental professional and will be in compliance with provisions in this SMP prior to receipt at the site. Source areas must be reviewed for current and past use and soil shall be sampled at an appropriate frequency to determine whether there is presence of TAL metals, TCL volatiles and semi-volatiles, dioxins/furans, and PCBs. Material from industrial sites, spill sites, or other environmental remediation sites or potentially contaminated sites will not be imported to the site.

All imported soils will meet the backfill and cover soil quality standards established in 6NYCRR 375-6.7(d). Soil material shall be free of debris, roots, wood, scrap material, vegetable matter, refuse, soft unsound particles, frozen, deleterious, or objectionable materials. Soils that meet 'exempt' fill requirements under 6 NYCRR Part 360, but do not meet backfill or cover soil objectives for this site, will not be imported onto the site without prior approval by NYSDEC. Solid waste will not be imported onto the site.

Trucks entering the site with imported soils will be securely covered with tight fitting covers. Imported soils will be stockpiled separately from excavated materials and covered to prevent dust releases.

11.0 Stormwater Pollution Prevention

If the NYSDEC determines that a Stormwater Pollution Prevention Plan is applicable, the following conditions shall be adhered to (in addition to other conditions required by the NYSDEC):

- Barriers and hay bale checks will be installed and inspected once a week and after every storm event. Results of inspections will be recorded in a logbook and maintained at the site and available for inspection by NYSDEC. All necessary repairs shall be made immediately.
- Accumulated sediments will be removed as required to keep the barrier and hay bale check functional.
- All undercutting or erosion of the silt fence toe anchor shall be repaired immediately with appropriate backfill materials.
- Manufacturer's recommendations will be followed for replacing silt fencing damaged due to weathering.
- Erosion and sediment control measures identified in the SMP shall be observed to ensure that they are operating correctly. Where discharge locations or points are accessible, they shall be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to receiving waters.
- Silt fencing, straw wattles, fiber rolls, or hay bales will be installed around the entire perimeter of the construction area.
- Sediment shall not be tracked onto adjacent roadways. Erosion and sediment control measures will include dust control and a stabilized construction entrance, as well as catch basin inlet protection on adjacent roadways where inlet grates are located.
- Any sediment or dust tracked onto local or state roadways will be promptly removed and properly disposed of.

- Any materials that pose potential for stormwater pollution (fuel canisters, lubricants, etc) will be stored inside or under cover.
- All erosion and sediment control measures will be installed in accordance with the most recent version of the NYS Blue Book (New York State Standards and Specifications for Erosion and Sediment Control).
- Inspections will be required per the most recent SPDES General Permit, and shall be conducted by a qualified inspector per NYSDEC requirements.

If the cumulative disturbance is over 1 acre (including clearing and grubbing), adherence to NYSDEC guidelines is required as is attainment of the proper SPDES General Permit for Stormwater Discharges from Construction Activity by submission of a Notice of Intent (NOI) to the Department and preparation of a stormwater pollution prevention plan (SWPPP). The SWPPP shall be prepared for the proposed site work by a qualified professional per NYSDEC requirements. All elements required to be in the SWPPP are identified in the SPDES General Permit. Items required for recordkeeping and posting at the site are identified in the SPDES General Permit as well, and this must be adhered to. The owner/operator can file a Notice of Termination (NOT) with the NYSDEC once site work is complete and the site is stabilized.

A copy of the applicable SPDES General Permit and necessary forms can be obtained from NYSDEC website or from the regional office.

12.0 Contingency Plan

If underground tanks or other previously unidentified contaminant sources are found during post-remedial subsurface excavations or development related construction, excavation activities will be suspended until sufficient equipment is mobilized to address the condition.

Sampling will be performed on product, sediment and surrounding soils, etc. as necessary to determine the nature of the material and proper disposal method. Chemical analysis will be performed for full a full list of analytes (TAL metals; TCL volatiles and semi-volatiles, TCL pesticides and PCBs), unless the site history and previous sampling results provide a sufficient justification to limit the list of analytes. In this case, a reduced list of analytes will be proposed to the NYSDEC for approval prior to sampling.

Identification of unknown or unexpected contaminated media identified by screening during invasive site work will be promptly communicated by phone to NYSDEC's Project Manager. Reportable quantities of petroleum product will also be reported to the NYSDEC spills hotline. These findings will be also included in the periodic reports prepared pursuant to Section 5 of the SMP.

13.0 Community Air Monitoring Plan

13.1 Air Monitoring Procedures

The Project Manager or designee will conduct air monitoring in accordance with the New York State Department of Health (NYSDOH) Community Air Monitoring Plan. Direct reading instruments will be calibrated in accordance with manufacturer's requirements and the results of the calibration will be documented.

This Community Air Monitoring Plan (CAMP) sets forth the procedures for performing real-time monitoring for volatile organic compounds (VOCs) and particulates (i.e., dust) at the downwind perimeter of each designated work area with respect to specific activities to be completed as part of the remedial investigation. The CAMP is not intended for use in establishing action levels for worker respiratory protection. Rather, its intent is to provide a measure of protection for the downwind community (i.e., off-site receptors including residences and businesses, and on-site or nearby workers not directly involved with the subject work activities) from potential airborne contaminant releases as a direct result of investigative and remedial work activities. The action levels specified herein require increased monitoring, corrective actions to abate emissions, and/or work shutdown. Additionally, the CAMP helps to confirm that work activities did not spread contamination off-site through the air.

Continuous monitoring will be required for all subsurface intrusive activities as determined by a qualified environmental professional. Subsurface intrusive activities include, but are not limited to, soil excavation and handling, and test pitting or trenching.

Periodic monitoring for VOCs will also be required during non-intrusive activities such as the collection of surface soil and sediment samples or the collection of groundwater samples from existing monitoring wells. "Periodic" monitoring during surface soil, sediment, and groundwater sample collection activities will consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well bailing/purging, and taking a reading prior to leaving a sample location. In some instances, depending upon the proximity of potentially exposed individuals, continuous monitoring may be required during sampling activities.

VOCs will be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis. Upwind concentrations will be measured at the start of each workday and periodically thereafter to establish background conditions.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds five (5) parts per million (ppm) above background for the 15minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below five (5) ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shut down.

All 15-minute readings will be recorded and available for New York State Department of Environmental Conservation (NYSDEC) and NYSDOH personnel to review. Instantaneous readings, if any, used for decision making purposes will also be recorded.

Particulate concentrations will also be monitored continuously at the upwind and downwind perimeters of the exclusion zone or work area. The particulate monitoring will be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment will be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration will be visually assessed during all work activities.

- If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m³) greater than background (upwind perimeter) for the 15- minute period or if airborne dust is observed leaving the work area, then dust suppression techniques will be employed. Work may continue with dust suppression techniques if downwind PM-10 particulate levels do not exceed 150 mcg/m³ above the upwind level and if no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than 150 mcg/m³ above the upwind level, work must be stopped and a re-evaluation of activities initiated. Work can resume if dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within 150 mcg/m³ of the upwind level and in preventing visible dust migration.

All readings will be recorded and available for NYSDEC and NYSDOH personnel to review.

			Breathing Zone* Action Level Concentrations	
Contaminant/ Atmospheric Condition	Monitoring Equipment	Monitoring Protocol	Monitored Level for Mandatory Respirator Use**	Monitored Level for Mandatory Work Stoppages***
VOCs	Photoionization detector (PID) with an 11.7 eV lamp	Initially readings will be recorded every 15 minutes. If no sustained readings are obtained in the breathing zone, readings will be recorded every 30 minutes.	5 ppm above background	25 ppm above background
Particulates	MiniRam or Dusttrak or Equivalent	Three times daily when work is being conducted that can generate dust, e.g. monitoring well installation, test pits		150 ug/m ^o at fence line (institute engineering controls t control dust) per NYSDEC TAGM 4031
*Monitoring performed in the breathing zone for sustained readings of 5 minutes or more. Monitor source first; if the source is near or above the action level concentration, monitor in the breathing zone. **Monitored levels will require the use of approved respiratory protection specified in the Health and Safety Plan. ***Consult the Project Manager.				

These air sampling locations will be adjusted on a daily or more frequent basis based on actual wind directions to provide an upwind and at least two downwind monitoring stations. Fixed monitoring stations shall be located at the northern and eastern site perimeters, regardless of wind direction, as there are potential sensitive receptors in those vicinities.

Exceedances of action levels listed in the CAMP will be reported to NYSDEC and NYSDOH Project Managers.

14.0 Odor Control Plan

This odor control plan is capable of controlling emissions of nuisance odors off- site. If nuisance odors are identified at the site boundary, or if odor complaints are received, work will be halted and the source of odors will be identified and corrected. Work will not resume until all nuisance odors have been abated. NYSDEC and NYSDOH will be notified of all odor events and of any other complaints about the project. Implementation of all odor controls, including the halt of work, is the responsibility of the property owner's Remediation Engineer, and any measures that are implemented will be discussed in the Periodic Review Report.

All necessary means will be employed to prevent on- and off-site nuisances. At a minimum, these measures will include: (a) limiting the area of open excavations and size of soil stockpiles; (b) shrouding open excavations with tarps and other covers; and (c) using foams to cover exposed odorous soils. If odors develop and cannot be otherwise controlled, additional means to eliminate odor nuisances will include: (d) direct load-out of soils to trucks for off-site disposal; (e) use of chemical odorants in spray or misting systems; and, (f) use of staff to monitor odors in surrounding neighborhoods.

If nuisance odors develop during intrusive work that cannot be corrected, or where the control of nuisance odors cannot otherwise be achieved due to on-site conditions or close proximity to sensitive receptors, odor control will be achieved by sheltering the excavation and handling areas in a temporary containment structure equipped with appropriate air venting/filtering systems.

15.0 Dust Control Plan

A dust suppression plan that addresses dust management during invasive on- site work will include, at a minimum, the items listed below:

- Dust suppression will be achieved through the use of a dedicated onsite water truck for road wetting. The truck will be equipped with a water cannon capable of spraying water directly onto off-road areas including excavations and stockpiles.
- Clearing and grubbing of larger sites will be done in stages to limit the area of exposed, unvegetated soils vulnerable to dust production.
- Gravel will be used on roadways to provide a clean and dust-free road surface.
- On-site roads will be limited in total area to minimize the area required for water truck sprinkling.

16.0 Other Nuisances

If necessary, a plan for rodent control will be developed and utilized by the contractor prior to and during site clearing and site grubbing, and during all remedial work.

A plan will be developed and utilized by the contractor for all remedial work to ensure compliance with local noise control ordinances. Appendix D

Landfill Inspection Log

LINDLEY SOUTH LANDFILL - STEUBEN COUNTY POST-CLOSURE FIELD INSPECTION REPORT FORM

DATE: **INSPECTOR:**

Entrance Driveway & Service Road Conditions	good	fair	poor	
Culverts	good .	fair	poor	
Trespass Sign Conditions	good	fair	poor	
Fence/Gate Conditions	good	fair	poor	locked
Drainage Channels	clear	sediment	plugged	
Perimeter Drains	clear	sediment	plugged	
Evidence of Trespass	yes	no		
Evidence of Vehicle Use	yes	no		

LANDFILL CAP AREA				
Unauthorized Materials Present	yes	no	where	
Uncovered Areas	yes	no	where	
Vegetative Cover Conditions	good	fair	poor	
Evidence of Vectors	yes	no	where	
Evidence of Erosion	yes	no	where	
Evidence of Ponded Water	yes	no	where	
Evidence of Leachate Seepage	yes	no	where	
Other				

MONITORING LOCATIONS			
Gas Vents	secure	damaged	
Monitoring Wells/Piezometer	secure	damaged	
Surface Water Monitoring Locations	flowing	blocked	
Other			

COMMENTS

CORRECTIVE MEASURES

Figure 1

Site Plan

