

Atlantic Richfield Company

Eric J. Larson
Operations Project Manager

1 West Pennsylvania Avenue
Suite 440
Towson, MD 21204
Phone: (410) 825-2880
Cell: (443) 807-6233
E-mail: eric.larson@bp.com

October 5, 2010

Mr. Michael J. Negrelli
Remedial Project Manager
U.S. Environmental Protection Agency
Region 2
290 Broadway Avenue
NYC SB2 – 20th Floor
New York, NY 10007-1866


**2009 Annual Report of Operations and Maintenance Activities
Partial River Channelization Project
Former Sinclair Refinery Site, Operable Unit 1
Wellsville, New York**

Dear Mike:

Enclosed are two copies of the *2009 Annual Report of Operations and Maintenance Activities* for the Partial River Channelization Project at the Former Sinclair Refinery Site, Operable Unit 1 (OU1) in Wellsville, New York. The report presents a discussion of the operation and maintenance activities that occurred for this OU1 project during 2009.

If you have any questions regarding this submittal, please do not hesitate to contact me at 443-807-6233.

Sincerely,

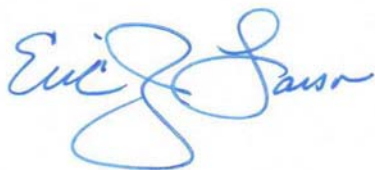

Eric J. Larson
Operations Project Manager

Enclosures

Cc: (with attachments)
Maurice Moore, NYSDEC
Martin Schmidt, URS
Jerry Palmer, On-Site Technical Services
David A. Howe Public Library, Wellsville NY

A BP affiliated company



2009 ANNUAL REPORT OF OPERATIONS AND MAINTENANCE ACTIVITIES

PARTIAL RIVER CHANNELIZATION PROJECT FORMER SINCLAIR REFINERY SITE WELLSVILLE, NEW YORK



Prepared For

Atlantic Richfield Company
A BP affiliated company
28100 Torch Parkway, MC 2S
Warrenville, IL 60555-3938

Prepared By

On-Site Technical Services, Inc.
72 Railroad Avenue
Wellsville, New York 14895

TABLE OF CONTENTS

1.0	OVERVIEW	1
1.1	INTRODUCTION	1
1.2	PROJECT BACKGROUND	1
1.3	REPORT FORMAT	1
2.0	OPERATION, MAINTENANCE AND REPORTING REQUIREMENTS	2
2.1	OPERATIONS REQUIREMENTS	2
2.2	MAINTENANCE REQUIREMENTS	3
2.3	REPORTS	3
3.0	2009 ROUTINE OPERATIONS AND MAINTENANCE ACTIVITIES	4
3.1	OVERVIEW OF 2009 ROUTINE OPERATIONS AND MAINTENANCE	4
3.2	ROUTINE OPERATIONS	4
3.3	ROUTINE MAINTENANCE	5
4.0	GENESEE RIVER FLOOD INSPECTION	6
5.0	SUMMARY	7
6.0	OTHER ISSUES	7

Tables

Table 1 – Genesee River Dike Surveyed Elevations 1992 to 2001, 2006

Table 2 – 2009 Daily Average Stage and Discharge Genesee River at Wellsville, New York

Figures

Figure 1 – Site Location

Figure 2 – East Bank & West Dike Station Locations

Figure 3 – Genesee River Daily Discharge and Stage

Appendices

Appendix A – CD containing electronic copy of this report

Appendix B – June 27, 2005 Correspondence

Appendix C – Letter dated November 8, 2002 from EPA to Atlantic Richfield Company
documenting revisions to the operations and maintenance requirements

Appendix D – Annual Flow Inspection Checklists and Photographs

1.0 OVERVIEW

1.1 Introduction

This document presents a summary of the 2009 operation and maintenance activities for the Partial River Channelization Project at the Former Sinclair Refinery Site Operable Unit 1 (OU-1) located in Wellsville, New York (Figure 1). Operation and maintenance (O&M) procedures for this project are detailed in the *Operations and Maintenance Plan for the Partial River Channelization on the Genesee River, Wellsville, New York* (O&M Plan); dated April 1992, and prepared by Ebasco Services. An electronic copy of this report is included as Appendix A.

1.2 Project Background

A Consent Decree, effective May 19, 1989, between Atlantic Richfield Company (AR) and the United States Environmental Protection Agency (USEPA) outlined, in part, that AR protect the Central Elevated Landfill Area (CELA), and the smaller South Landfill Area (SLA) from inundation and erosion. A dike was constructed on the west bank of the river to protect the CELA and SLA from erosion and inundation by floodwater. The west dike is designed to protect against erosion and overtopping up to the 100-year flood elevation. Bank construction and bank riprap stabilization of the east bank of the river was performed to protect against erosion. The east bank stabilization is designed to protect the east bank from erosion up to the bank full flood condition of the river. Figure 2 shows the east bank and west dike station locations used in construction and in referencing for this project.

The Consent Decree outlines that AR maintains the Partial River Channelization Project in accordance with the procedures detailed in the above referenced O&M Plan. The O&M Plan contains details related to the project background and construction history.

1.3 Report Format

As previously stated, this report is being submitted to document the operations and maintenance activities that were conducted in 2009 and to meet the requirements of the Consent Decree. The remainder of this report is organized as follows:

- Section 2 outlines the approved requirements for operations, maintenance and reporting;
- Section 3 details the routine operation and maintenance activities performed during 2009;
- Section 4 discusses Genesee River flood inspections conducted in 2009;
- Section 5 summarizes 2009 project activities; and
- Section 6 describes other issues pertaining to the project.

2.0 OPERATION, MAINTENANCE AND REPORTING REQUIREMENTS

The purpose of this section is to specify the currently approved operations, maintenance and report requirements. The requirements are outlined in the O&M Plan and in subsequent correspondence between USEPA and AR.

2.1 Operations Requirements

The O&M Plan requires that specific routine inspections be conducted. In addition, the O&M Plan requires additional inspections in the event that certain river flow conditions exist. The inspections are conducted using checklists included in the O&M Plan. The operations requirements are described below.

- Annual visual inspection (for sloughing, erosion, etc.) during a low river flow period, which is defined as a flow rate of less than 180 cubic feet per second (cfs). Low flow conditions typically occur between June and October.
- Visual inspection after each major flood (i.e. 4,500 cfs), which can occur during any season of the year. A major flood is defined as when water in the river (east bank between stations 1+65 and 6+67) approaches the top of the east bank (Elevation 1496.00 ft above mean sea level [amsl]). Also, discharge data from United States Geological Survey (USGS) gaging station 04221000, which is located approximately 1.8 miles downstream from the project site is used to verify the flood conditions and as a source for establishing a database for identifying flood conditions.
- The 1992 O&M plan required an annual check of the soil pH (maintained above 5.8) along the west dike during a period of low flow. Pursuant to USEPA's June 27, 2005 correspondence (Appendix B), the requirement for soil pH testing was modified to every 3 years as part of the agronomic soil testing. Soil agronomic testing was conducted in 2006.
- Annual visual inspection with photographs (during a low flow period) of the riverbed where sediment removal was performed to control and improve river flow condition (opposite west dike station 20+00), to check for shoaling.
- A patrol and visual inspection during each high water event for any damage that may jeopardize the integrity of the dike and protection of the landfill (provided safe conditions exist).
- A survey of the dike profile/cross section every 200 feet and at every slope transition during a low flow period by a licensed surveyor to determine dike settlement and changes in cross sections. The O&M Plan states that the frequency of the surveys will be based on significant changes to the survey data. The O&M Plan also outlines an annual survey of the riverbed at the toe of the slopes during a low flow period, to check for displacement or unusual settlement of the riprap slope protection. The dike survey

frequency was changed in 2002 to one survey every five years; this change is documented in a letter from USEPA to Terry Moore dated November 8, 2002 and included as Appendix C. A survey was conducted in 2006 and the next survey is scheduled for 2011.

2.2 Maintenance Requirements

The O&M Plan requires that AR perform such maintenance and inspections as may be necessary to assure the serviceability of the dikes and the 100-year flood protection of the CELA. Routine maintenance requirements to preserve the integrity of the dikes and landfill are detailed below. Additional maintenance activities may be required if conditions identified during inspections warrant.

- Along the west bank dike, lime application will be applied as necessary to maintain soil pH above 5.8.
- Along the west slope of the west dike, fertilizer will be applied as needed, based on the agronomic soil test performed every three years. An agronomic soil test was completed in 2006 and the next agronomic soil test is scheduled for 2009.
- Along the west bank dike, vegetation will be mowed when turf reaches a height of more than six inches. Mowing will not be closer than four inches to the ground in order to promote vigor and control woody plants and other noxious weeds. Vegetation should be allowed to attain a height of eight to twelve inches prior to the onset of winter.
- Remove woody growth, other than tall grass and vegetation, from both dikes annually.
- Maintenance of the road on the top of the west dike. Maintenance includes the repair of the roadway due to water ponding, removal of woody growth other than grass and aggregate replacement due to ruts, to preserve the six inch surface requirement.

2.3 Reports

The currently approved O&M Plan outlines the following reports and notifications.

- AR will notify the USEPA 14 days prior to annual inspections.
- The USEPA will be notified of any corrective actions requiring more than 30 days to complete.
- An annual summary report of O&M activities for the previous year will be submitted to the USEPA and New York State Department of Environmental Conservation (NYSDEC) by December 31 of the following year.

3.0 2009 ROUTINE OPERATIONS AND MAINTENANCE ACTIVITIES

3.1 Overview of 2009 Routine Operations and Maintenance

Operations and maintenance activities conducted during 2009 included east bank and west dike low flow inspections, a post high water event inspection and minimal woody growth removal. No significant operations or maintenance issues were identified in 2009.

3.2 Routine Operations

Annual Visual Inspections

East bank, west dike and river bed low flow inspections were conducted on April 28, 2009. No significant issues were noted during the inspection. No corrective action requiring greater than 30 days to complete occurred in 2009.

A summary of the annual low flow dike inspection findings is provided below. At the time of the low flow inspection, the river gage height was 4.68 ft, approximately 163.22 cfs, which is below the O&M plan requirement of less than 180 cfs. Completed inspection checklists and inspection photographs are presented in Appendix D of this report. A summary of the annual low flow east bank and west dike inspections is provided below.

- No observed settlement, sloughing or loss of grade, with the exception of minor riprap displacement/scouring at the toe of West Dike Station 12+00.
- No observed caving on either side of dike.
- No evidence of seepage, saturated areas, or sand boils.
- No evidence of riprap displacement or unusual settlement was observed at the toe of the riprap slope protection (except as noted above).
- Access roads were in good condition.
- No evidence of unauthorized traffic.
- Minimal accumulation of drift, trash or debris.
- Vegetative cover in good condition.
- Woody growth present during inspection.
- No evidence of unauthorized excavation, loose sod, or sod removal.
- No evidence of fires or vandalism.
- Routine mowing completed to date.
- No shoaling observed in the channel opposite west dike station 20+00.

Soil pH/Agronomic Testing

The soil pH was last checked on September 19, 2009; the soil pH was 7.8-8.0 standard units. No application of lime or fertilizer has been necessary. As described in Section 2.1,

soil pH testing is now required every three years as part of agronomic testing. The next scheduled event will occur in 2012.

Surveys

As outlined in the O&M Plan, surveys of the east bank and west dike were performed by a New York State Licensed Surveyor annually from 1992 through 2001 and then again in 2006. The 1992 and 1993 surveys were conducted by Douglas C. Meyers, P.C. of Arcade, New York. James B. Ball, L.S. of Wellsville, New York completed the surveys from 1994 through 2001, and 2006. The 1992 to 2001, and 2006, dike survey data is included as Table 1 for reference. A detailed review of the surveys completed between 1992 and 2001 was completed as part of the 2001 annual report preparation. Based on the review of this 10-year period of annual survey data, no significant settlement occurred to the dikes. The O&M plan states that the frequency of surveys will be based on significant changes to the survey data. Review of the 10 years of survey data revealed that significant changes are more easily identified with visual surveys. Approval to modify the survey frequency from annually to every five years was granted in a letter dated November 8, 2002 from USEPA to Mr. Terry Moore, AR (Appendix C). The next survey is scheduled for 2011. The 2006 dike survey and subsequent inspections have shown that the dikes appear in generally good condition with minor scouring with riprap displacement at and around the toe of the slope at the West Dike Station 12+00. This area continues to be monitored.

3.3 Routine Maintenance

Lime/Fertilizer Application

Lime applications are required to maintain soil pH above 5.8. Fertilizer is applied as needed based upon agronomic soil testing. Soil testing, including pH and agronomic testing, is conducted every three years. The soil testing was completed in 2006 and no application of lime or fertilizer was needed; the next soil testing and possible applications of lime or fertilizer will be in 2012.

Woody Growth Removal

Minimal woody growth removal at the east bank and top of west dike were completed in 2009. Alternate approaches to woody growth removal are being considered for 2010 and are discussed in Section 6 of this report.

Roadway Maintenance

Maintenance including repair of the roadway on the top of the dike due to water ponding, removal of woody growth and aggregate replacement due to ruts is conducted when

appropriate. Based upon routine inspections conducted in 2009, no roadway maintenance was necessary.

4.0 GENESEE RIVER FLOOD INSPECTION

The Genesee River is northerly flowing and located along the east side of the Former Sinclair Refinery Site. A USGS, Water Resources Division river gaging station is located on the Genesee River approximately 1.8 miles down stream of the partial river channelization site. The station identification number is 04221000. The automatic gage measures water height (stage) and the USGS has developed an expanded rating table to correlate water height with stream flow (discharge).

The O&M Plan states that visual inspections will be made after each major flood (i.e. 4500 cfs). Major floods are defined in the O&M plan as when the water elevation in the river approaches the top of the east bank between stations 1+65 and 6+67 (elevation of 1,496 ft amsl). The USGS has defined flood stage to be a gage height of 11 ft, which equates to a flow of 8907 cfs. Based on historical measures, a flow greater than 7,000 cfs (gage height > 10 ft) is required for the water level to approach the top of the east bank.

Provisional 2009 gage height and stream flow data from the USGS river gaging station are included in this report. Provisional data is subject to change by the USGS. The 2009 daily average stage and discharge data is presented in tabular form as Table 2 and graphically as Figure 3.

There was one event in 2009 which resulted in a flow that exceeded a daily average of 4500 cfs. The event occurred on March 9, 2009 and included a daily average flow of 4583.68 cfs and a daily average gage height of 8.51 ft. A high water inspection was completed on March 24, 2009 with details of the inspection provided below. No damage was observed to the project area.

Post High Water Inspection, March 24, 2009 – East Bank and West Dike

A summary of the post high water dike inspection findings completed on March 24, 2009 are provided below. Completed inspection checklists and inspection photographs are presented in Appendix D of this report.

- No settlement, sloughing or loss of grade with the exception of minor riprap displacement/scouring at the toe of West Dike Station 12+00.
- No caving on either side of the dike.
- No seepage, saturated areas, or sand boils.
- No evidence of riprap displacement or unusual settlement (except as noted above).

- Access roads are in good condition.
- No evidence of unauthorized traffic.
- Minimal accumulation of drift, trash or debris.
- Vegetative cover in good condition.
- Woody growth present.
- No unauthorized excavation, loose sod, or sod removal.
- No evidence of burrowing animals.
- No evidence of fires or vandalism.
- No shoaling in the channel.

5.0 SUMMARY

Based on the results of inspections and observations over the past year, no evidence of significant deterioration, erosion and/or settlement at the Partial River Channelization Project site was noted. The toe area at and around west dike station 12+00 does show signs of minor scouring with minor riprap displacement. This observation was first made in 2006 and the area continues to be monitored. Routine maintenance was conducted; no additional maintenance was required or conducted in 2009.

6.0 OTHER ISSUES

Due to safety concerns related to woody growth removal techniques which have traditionally involved traversing the riverbanks, the manner in which growth is removed has been re-evaluated. Due to the steepness and potential instability of the rip-rap which covers both the east bank and the west dike, the following approach is recommended: Manual removal (loppers) will be conducted along the top of each slope where footing is safe, thereby eliminating the risks associated with traversing the slopes. In addition, a tractor mounted boom mower may be employed along the top of the west dike which will allow greater reach. This mower cannot be utilized on the east bank due to access restrictions.

Table 1

Genesee River Dike Surveyed Elevations (1992-2006)
Former Sinclair Refinery Site (OU-1)
Wellsville, New York
(ft amsl)

Station & Distance From Baseline	Location Description	1992 Elevation	1993 Elevation	1994 Elevation	1995 Elevation	1996 Elevation	1997 Elevation	1998 Elevation	1999 Elevation	2000 Elevation	2001 Elevation	2006 Elevation	Change From 1992 to 2006	Change From 1993 to 2006	Change From 1999 to 2006	Change From 2000 to 2006	Change from 2001 to 2006	Average Elevation
East Dike Station 0+00																		
E000-55.0	Ground Surface		1499.42	1499.73	1499.41	1499.44	1499.45	1499.51	1499.54	1499.43	1499.52	1499.39		-0.03	-0.15	-0.04	-0.13	1499.48
E000-35.0	Slope Break	1499.80	1499.64	1499.73	1499.77	1499.75	1499.76	1499.81	1499.81	1499.79	1499.76	1499.78	-0.02	0.14	-0.03	-0.01	0.02	1499.76
E000-30.4	Start Riprap	1500.30	1500.27	1500.38	1500.31	1500.23	1500.26	1500.31	1500.31	1500.26	1500.26	1500.26	-0.04	-0.01	-0.05	0.00	0.00	1500.29
E000-19.5	Slope Crest	1500.15	1500.12	1500.24	1500.14	1500.10	1500.10	1500.18	1500.18	1500.14	1500.14	1500.10	-0.05	-0.02	-0.08	-0.04	-0.04	1500.14
E000-1	Slope Surface	1492.15	1492.75	1492.87	1492.72	1492.98	1492.73	1492.99	1493.29	1493.12	1492.96	1492.18	0.03	-0.57	-1.11	-0.94	-0.78	1492.79
East Dike Station 2+00																		
E200-55.0	Ground Surface		1496.45	1496.44	1496.41	1496.47	1496.47	1496.52	1496.56	1496.59	1496.53	1496.56		0.11	0.00	-0.03	0.03	1496.50
E200-35.0	Slope Break		1496.27	1496.31	1496.33	1496.33	1496.34	1496.39	1496.39	1496.36	1496.33	1496.35		0.08	-0.04	-0.01	0.02	1496.34
E200-26.2	Start Riprap	1496.30	1496.24	1496.33	1496.28	1496.24	1496.26	1496.33	1496.31	1496.28	1496.27	1496.24	-0.06	0.00	-0.07	-0.04	-0.03	1496.28
E200-14.5	Slope Crest	1496.45	1496.42	1496.52	1496.47	1496.44	1496.45	1496.50	1496.48	1496.43	1496.43	1496.43	-0.02	0.01	-0.05	0.00	0.00	1496.46
E200-5.6	Slope Surface	1492.70	1492.62	1492.78	1492.73	1492.72	1492.73	1492.80	1492.78	1492.75	1492.74	1492.92	0.22	0.30	0.14	0.17	0.18	1492.75
East Dike Station 4+00																		
E400-55.0	Ground Surface		1496.39	1496.45	1496.39	1496.46	1496.43	1496.47	1496.52	1496.55	1496.41	1496.55		0.16	0.03	0.00	0.14	1496.46
E400-35.0	Slope Break	1496.30	1496.18	1496.33	1496.38	1496.38	1496.37	1496.40	1496.40	1496.38	1496.34	1496.41	0.11	0.23	0.01	0.03	0.07	1496.35
E400-26.6	Start Riprap	1495.90	1495.83	1495.88	1495.88	1495.91	1495.89	1495.93	1495.92	1495.89	1495.85	1495.99	0.09	0.16	0.07	0.10	0.14	1495.90
E400-14.0	Slope Crest	1495.50	1495.46	1495.33	1495.50	1495.52	1495.49	1495.54	1495.53	1495.50	1495.49	1495.60	0.10	0.14	0.07	0.10	0.11	1495.50
E400-6.5	Slope Surface	1492.50	1492.51	1492.58	1492.58	1492.59	1492.52	1492.57	1492.58	1492.59	1492.50	1492.93	0.43	0.42	0.35	0.34	0.43	1492.59
East Dike Station 6+00																		
E600-55.0	Ground Surface		1496.21	1496.20	1496.18	1496.21	1496.21	1496.27	1496.25	1496.36	1496.26	1496.39		0.18	0.14	0.03	0.13	1496.25
E600-35.0	Slope Break	1496.05	1496.05	1496.07	1496.12	1496.12	1496.08	1496.13	1496.13	1496.12	1496.10	1496.12	0.07	0.07	-0.01	0.00	0.02	1496.10
E600-22.6	Start Riprap	1496.45	1496.36	1496.46	1496.12	1496.45	1496.36	1496.42	1496.40	1496.38	1496.39	1495.92	-0.53	-0.44	-0.48	-0.46	-0.47	1496.34
E600-13.7	Slope Crest	1496.10	1496.07	1496.09	1496.10	1496.06	1496.01	1496.08	1496.06	1496.04	1496.03	1496.03	-0.07	-0.04	-0.03	-0.01	0.00	1496.06
E600-4.7	Slope Surface	1492.35	1492.26	1492.29	1492.30	1492.26	1492.19	1492.22	1492.21	1492.15	1492.12	1492.63	0.28	0.37	0.42	0.48	0.51	1492.27
East Dike Station 8+00																		
E800-55.0	Ground Surface		1497.20	1497.28	1497.22	1497.19	1497.32	1497.31	1497.34	1497.35	1497.26	1497.36		0.16	0.02	0.01	0.10	1497.28
E800-35.0	Slope Break	1496.80	1496.73	1496.84	1496.87	1496.87	1496.91	1496.95	1496.92	1496.91	1496.93	1496.93	0.13	0.20	-0.02	0.01	0.02	1496.88
E800-18.7	Start Riprap	1496.80	1496.77	1496.91	1496.84	1496.78	1496.82	1496.86	1496.85	1496.81	1496.81	1496.83	0.03	0.06	-0.02	0.02	0.02	1496.83
E800-10.3	Slope Crest	1496.20	1496.12	1496.25	1496.18	1496.25	1496.29	1496.34	1496.32	1496.27	1496.28	1496.29	0.09	0.17	-0.03	0.02	0.01	1496.25
E800-2.5	Slope Surface	1493.10	1493.14	1493.28	1493.21	1493.16	1493.20	1493.21	1493.20	1493.16	1493.11	1493.23	0.13	0.09	0.03	0.07	0.12	1493.18
East Dike Station 10+00																		
E1000-55.0	Ground Surface		1499.08	1499.16	1499.07	1499.06	1499.11	1499.15	1499.20	1499.17	1499.12	1499.11		0.03	-0.09	-0.06	-0.01	1499.12
E1000-32.0	Slope Break	1498.50	1498.47	1498.58	1498.60	1498.53	1498.52	1498.56	1498.56	1498.54	1498.53	1498.50	0.00	0.03	-0.06	-0.04	-0.03	1498.54
E1000-29.0	Slope Break	1499.00	1498.95	1499.01	1499.06	1499.03	1499.07	1499.09	1499.09	1499.08	1499.06	1499.10	0.10	0.15	0.01	0.02	0.04	1499.05
E1000-27.6	Start Riprap	1499.00	1498.97	1498.98	1499.04	1499.00	1499.03	1499.02	1499.07	1499.03	1499.00	1498.95	-0.05	-0.02	-0.12	-0.08	-0.05	1499.01
E1000-18.4	Slope Crest	1498.95	1498.91	1499.03	1498.97	1498.93	1498.94	1498.95	1498.96	1498.96	1498.94	1498.94	-0.01	0.03	-0.02	-0.02	0.00	1498.95
E1000-5.2	Slope Surface	1493.35	1493.06	1493.17	1493.11	1493.09	1493.11	1493.11	1493.12	1493.11	1493.08	1493.29	-0.06	0.23	0.17	0.18	0.21	1493.15

Notes: Negative change indicates a decrease in elevation.
Positive change indicates an increase in elevation.

Table 1

Genesee River Dike Surveyed Elevations (1992-2006)
Former Sinclair Refinery Site (OU-1)
Wellsville, New York
(ft amsl)

Station & Distance From Baseline	Location Description	1992 Elevation	1993 Elevation	1994 Elevation	1995 Elevation	1996 Elevation	1997 Elevation	1998 Elevation	1999 Elevation	2000 Elevation	2001 Elevation	2006 Elevation	Change From 1992 to 2006	Change From 1993 to 2006	Change From 1999 to 2006	Change From 2000 to 2006	Change from 2001 to 2006	Average Elevation
East Dike Station 12+00																		
E1200-55.0	Ground Surface		1500.18	1500.26	1500.24	1500.21	1500.23	1500.30	1500.33	1500.32	1500.29	1500.28		0.10	-0.05	-0.04	-0.01	1500.26
E1200-35.0	Slope Break	1499.25	1499.17	1499.06	1499.23	1499.22	1499.27	1499.27	1499.26	1499.29	1499.25	1499.24	-0.01	0.07	-0.02	-0.05	-0.01	1499.22
E1200-29.0	Slope Break					1499.38	1499.35	1499.40	1499.40	1499.37	1499.36	1499.34			-0.06	-0.03	-0.02	1499.37
E1200-27.7	Start Riprap	1499.25	1499.23	1499.38	1499.35	1499.38	1499.20	1499.35	1499.32	1499.36	1499.34	1499.29	0.04	0.06	-0.03	-0.07	-0.05	1499.31
E1200-17.7	Slope Crest	1499.35	1499.27	1499.28	1499.31	1499.28	1499.25	1499.31	1499.30	1499.28	1499.24	1499.24	-0.11	-0.03	-0.06	-0.04	0.00	1499.28
E1200-4.5	Slope Surface	1493.80	1493.85	1493.99	1494.03	1494.03	1494.04	1494.09	1494.11	1494.07	1494.07	1494.29	0.49	0.44	0.18	0.22	0.22	1494.03
East Dike Station 14+00																		
E1400-55.0	Ground Surface		1499.55	1499.75	1499.57	1499.58	1499.61	1499.59	1499.63	1499.67	1499.67	1499.61		0.06	-0.02	-0.06	-0.06	1499.62
E1400-35.0	Slope Break	1499.30	1499.33	1499.46	1499.32	1499.37	1499.37	1499.30	1499.35	1499.43	1499.34	1499.33	0.03	0.00	-0.02	-0.10	-0.01	1499.35
E1400-28.0	Slope Break	1499.55	1499.55	1499.62	1499.65	1499.67	1499.69	1499.69	1499.69	1499.69	1499.67	1499.69	0.14	0.14	0.00	0.00	0.02	1499.65
E1400-25.5	Start Riprap	1499.10	1499.12	1499.17	1499.15	1499.16	1499.42	1499.43	1499.58	1499.58	1499.50	1499.11	0.01	-0.01	-0.47	-0.39	-0.34	1499.29
E1400-15.0	Slope Crest	1499.35	1499.32	1499.52	1499.35	1499.34	1499.34	1499.35	1499.34	1499.34	1499.31	1499.24	-0.11	-0.08	-0.10	-0.10	-0.07	1499.35
E1400-3.8	Slope Surface	1494.90	1494.88	1495.12	1494.96	1494.92	1494.91	1494.91	1494.86	1494.78	1494.77	1494.75	-0.15	-0.13	-0.11	-0.03	-0.02	1494.89
East Dike Station 16+00																		
E1600-55.0	Ground Surface		1499.23	1499.30	1499.31	1499.23	1499.34	1499.32	1499.34	1499.25	1499.32	1499.29		0.06	-0.05	0.04	-0.03	1499.29
E1600-35.0	Slope Break		1498.90	1498.92	1498.97	1498.97	1499.01	1498.98	1499.00	1498.96	1498.96	1498.98		0.08	-0.02	0.02	0.02	1498.97
E1600-28.0	Slope Break	1499.05	1499.10	1499.13	1499.16	1499.16	1499.18	1499.20	1499.20	1499.19	1499.17	1499.16	0.11	0.06	-0.04	-0.03	-0.01	1499.15
E1600-26.4	Start Riprap	1499.55	1499.53	1499.58	1499.41	1499.50	1499.40	1499.46	1499.35	1499.40	1499.39	1499.36	-0.19	-0.17	0.01	-0.04	-0.03	1499.45
E1600-14.7	Slope Crest	1498.95	1498.91	1498.97	1498.93	1498.93	1498.94	1498.98	1498.94	1498.90	1498.88	1498.83	-0.12	-0.08	-0.11	-0.07	-0.05	1498.92
E1600-5.2	Slope Surface	1494.30	1494.44	1494.48	1494.47	1494.43	1494.41	1494.45	1494.41	1494.37	1494.36	1494.34	0.04	-0.10	-0.07	-0.03	-0.02	1494.41
East Dike Station 18+00																		
E1800-55.0	Ground Surface		1500.09	1499.90	1499.92	1500.17	1500.25	1500.22	1500.12	1500.18	1500.18	1500.11		0.02	-0.01	-0.07	-0.07	1500.11
E1800-35.0	Slope Break	1499.60	1499.59	1499.49	1499.51	1499.62	1499.65	1499.67	1499.70	1499.77	1499.63	1499.69	0.09	0.10	-0.01	-0.08	0.06	1499.63
E1800-25.0	Slope Break				1499.57	1499.57	1499.57	1499.60	1499.60	1499.59	1499.56	1499.59			-0.01	0.00	0.03	1499.58
E1800-23.4	Start Riprap	1499.50	1499.48	1499.56	1499.57	1499.55	1499.49	1499.57	1499.52	1499.57	1499.54	1499.69	0.19	0.21	0.17	0.12	0.15	1499.55
E1800-13.9	Slope Crest	1499.15	1499.12	1499.07	1499.19	1499.14	1499.15	1499.16	1499.16	1499.16	1499.11	1499.14	-0.01	0.02	-0.02	-0.02	0.03	1499.14
E1800-5.7	Slope Surface	1496.10	1495.13	1495.09	1495.21	1495.20	1495.15	1495.16	1495.18	1495.17	1495.11	1495.13	-0.97	0.00	-0.05	-0.04	0.02	1495.24
West Dike Station 0+00																		
W000-39.5	River Side	1492.06	1492.10	1492.07	1492.08	1492.10												1492.08
W000-38.3	River Side											1489.67						1489.67
W000-36.0	River Side						1491.87	1492.08	1492.04	1492.14	1492.03							1492.03
W000-9.7	River Side	1506.16	1506.11	1506.11	1506.12	1506.10	1506.05											1506.11
W000-6.4	River Side							1505.93	1506.10	1506.08	1506.01	1506.00			-0.10	-0.08	-0.01	1506.02
W000-0	Baseline	1505.86	1505.86	1505.88	1505.91	1505.91	1505.88	1505.90	1505.91	1505.89	1505.90	1505.88	0.02	0.02	-0.03	-0.01	-0.02	1505.89
W000-4.4	Swale Side										1505.77	1505.87					0.10	1505.82
W000-31.3	Swale Side	1492.06	1492.00	1492.10	1492.09	1492.09	1492.98	1493.14	1493.11	1492.90	1492.95	1492.72	0.66	0.72	-0.39	-0.18	-0.23	1492.56
W000-40	Swale Side	1490.51	1490.59	1490.47	1490.52	1490.66	1490.75	1491.20	1491.17	1490.67	1491.27	1491.12	0.61	0.53	-0.05	0.45	-0.15	1490.81

Notes: Negative change indicates a decrease in elevation.
Positive change indicates an increase in elevation.

Table 1

Genesee River Dike Surveyed Elevations (1992-2006)
Former Sinclair Refinery Site (OU-1)
Wellsville, New York
(ft amsl)

Station & Distance From Baseline	Location Description	1992 Elevation	1993 Elevation	1994 Elevation	1995 Elevation	1996 Elevation	1997 Elevation	1998 Elevation	1999 Elevation	2000 Elevation	2001 Elevation	2006 Elevation	Change From 1992 to 2006	Change From 1993 to 2006	Change From 1999 to 2006	Change From 2000 to 2006	Change from 2001 to 2006	Average Elevation
West Dike Station 2+00																		
W200-46.7	River Side	1491.76	1491.76	1491.73	1491.84	1491.79	1491.89	1492.34	1491.76	1491.80	1491.78	1491.60	-0.16	-0.16	-0.16	-0.20	-0.18	1491.82
W200-7.3	River Side	1506.46	1506.48	1506.42	1506.48	1506.45	1506.58	1506.64	1506.61	1506.56	1506.65	1506.65	0.19	0.17	0.04	0.09	0.00	1506.54
W200-0	Baseline	1506.81	1506.77	1506.81	1506.83	1506.83	1506.81	1506.81	1506.82	1506.82	1506.82	1506.82	0.01	0.05	0.00	0.00	0.00	1506.81
W200-9.5	Swale Side	1506.26	1506.25	1506.22	1506.15	1506.10	1506.20	1506.10	1506.13	1506.29	1506.20	1506.14	-0.12	-0.11	0.01	-0.15	-0.06	1506.19
W200-18	Swale Side		1502.73	1502.63	1502.75	1502.62	1502.61	1502.47	1502.55	1502.78	1502.68	1502.57		-0.16	0.02	-0.21	-0.11	1502.64
W200-30.8	Swale Side	1498.56	1501.77	1501.64	1501.66	1501.69	1501.53	1501.39	1501.68	1501.78	1501.85	1501.56	3.00	-0.21	-0.12	-0.22	-0.29	1501.37
West Dike Station 4+00																		
W400-90	River Side	1491.46																1491.46
W400-82.1	River Side		1491.42	1491.50	1491.44	1491.40	1491.51	1491.44	1491.36	1490.98	1491.36							1491.38
W400-79.7	River Side	1496.11	1496.11															1496.11
W400-74.1	River Side		1495.70	1497.34	1495.77	1495.75	1495.73	1495.74	1495.68	1495.68	1495.68	1495.63		-0.07	-0.05	-0.05	-0.05	1495.87
W400-64.7	River Side	1497.56																1497.56
W400-59.9	River Side		1497.37	1498.33	1497.44	1497.42	1497.40	1497.42	1497.38	1497.37	1497.41	1497.40		0.03	0.02	0.03	-0.01	1497.49
W400-49.2	River Side	1498.16																1498.16
W400-47.5	River Side		1498.35	1498.33	1498.42	1498.39	1498.38	1498.38	1498.36	1498.36	1498.38	1498.38		0.03	0.02	0.02	0.00	1498.37
W400-6.9	River Side	1506.96	1506.91	1506.79	1506.78	1506.79	1506.67	1506.69	1506.77	1506.85	1506.77	1506.84	-0.12	-0.07	0.07	-0.01	0.07	1506.80
W400-0	Baseline	1506.96	1506.91	1506.93	1506.96	1506.96	1506.95	1506.96	1506.97	1506.97	1506.97	1506.96	0.00	0.05	-0.01	-0.01	-0.01	1506.95
W400-5.8	CELA Side				1506.90	1506.88	1506.84	1506.93	1506.92	1507.00	1506.93	1506.91			-0.01	-0.09	-0.02	1506.91
W400-6.0	CELA Side	1507.01	1507.00	1507.00														1507.00
W400-18.0	CELA Side		1501.48	1501.38	1501.47	1501.46	1501.49	1501.48	1501.48	1501.44	1501.49	1501.53		0.05	0.05	0.09	0.04	1501.47
W400-24.2	CELA Side	1499.46																1499.46
W400-31.6	CELA Side	1498.71	1498.66	1498.64	1498.72	1498.69	1498.69	1498.69	1498.68	1498.67	1498.70							1498.69
West Dike Station 6+00																		
W600-68.4	River Side	1497.16	1497.21	1496.90	1497.16	1497.25	1497.12	1497.20	1497.16	1497.14	1497.14	1497.15	-0.01	-0.06	-0.01	0.01	0.01	1497.14
W600-47.5	River Side	1498.46	1498.50	1498.45	1498.52	1498.58	1498.56	1498.60	1498.58	1498.52	1498.45	1498.58	0.12	0.08	0.00	0.06	0.13	1498.53
W600-31.3	River Side	1498.31	1498.36	1498.29	1498.37	1498.34	1498.32	1498.37	1498.34	1498.30	1498.34	1498.34	0.03	-0.02	0.00	0.04	0.00	1498.33
W600-8.0	River Side	1507.01	1507.00	1506.93	1506.98	1506.93	1506.90	1506.85	1506.91	1506.87	1506.86	1506.76	-0.25	-0.24	-0.15	-0.11	-0.10	1506.91
W600-0	Baseline	1506.96	1506.92	1506.91	1506.95	1506.95	1506.93	1506.97	1506.96	1506.95	1506.95	1506.96	0.00	0.04	0.00	0.01	0.01	1506.95
W600-5.4	CELA Side	1506.96	1507.05	1506.83	1506.88	1506.90	1506.89	1506.85	1506.92	1506.90	1507.03	1506.92	-0.04	-0.13	0.00	0.02	-0.11	1506.92
W600-16.2	CELA Side		1500.66	1500.56	1500.61	1500.42	1500.54	1500.58	1500.22	1500.54	1500.53	1500.77		0.11	0.55	0.23	0.24	1500.54
W600-16.7	CELA Side	1501.01																1501.01
West Dike Station 8+00																		
W800-55.0	River Side		1499.38	1499.17	1499.26	1499.29	1499.41	1499.39	1499.31	1499.46	1499.26	1499.33		-0.05	0.02	-0.13	0.07	1499.33
W800-49.0	River Side	1499.47	1499.48	1499.33	1499.40	1499.39	1499.35	1499.57	1499.42	1499.46	1499.46	1499.46	-0.01	-0.02	0.04	0.00	0.00	1499.44
W800-46.0	River Side	1498.87	1498.84	1499.13	1499.19	1499.14	1499.18	1499.20	1499.19	1499.16	1499.17	1499.24	0.37	0.40	0.05	0.08	0.07	1499.12
W800-28.8	River Side	1499.62	1499.61	1499.55	1499.62	1499.58	1499.60	1499.60	1499.60	1499.61	1499.61	1499.68	0.06	0.07	0.08	0.07	0.07	1499.61

Notes: Negative change indicates a decrease in elevation.
Positive change indicates an increase in elevation.

Table 1

Genesee River Dike Surveyed Elevations (1992-2006)
Former Sinclair Refinery Site (OU-1)
Wellsville, New York
(ft amsl)

Station & Distance From Baseline	Location Description	1992 Elevation	1993 Elevation	1994 Elevation	1995 Elevation	1996 Elevation	1997 Elevation	1998 Elevation	1999 Elevation	2000 Elevation	2001 Elevation	2006 Elevation	Change From 1992 to 2006	Change From 1993 to 2006	Change From 1999 to 2006	Change From 2000 to 2006	Change from 2001 to 2006	Average Elevation
West Dike Station 8+00 Continued																		
W800-7.5	River Side	1507.12	1507.02	1506.88	1506.99	1506.91	1506.93	1506.91	1506.90	1506.87	1506.83	1506.84	-0.28	-0.18	-0.06	-0.03	0.01	1506.93
W800-0	Baseline	1507.12	1507.02	1507.00	1507.00	1507.00	1507.02	1507.00	1507.00	1507.00	1507.01	1507.06	-0.06	0.04	0.06	0.06	0.05	1507.02
W800-7.3	CELA Side	1507.17	1507.08	1506.96	1506.97	1506.85	1507.00	1506.96	1507.02	1507.09	1507.06	1507.04	-0.13	-0.04	0.02	-0.05	-0.02	1507.02
W800-14.0	CELA Side		1502.43	1502.30	1502.37	1502.31	1502.20	1502.34	1502.20	1502.33	1502.28	1502.36		-0.07	0.16	0.03	0.08	1502.31
W800-15.5	CELA Side	1503.27	1503.27	1502.15	1502.30	1502.21	1502.22	1502.21	1502.15	1502.09	1502.19	1502.00	-1.27	-1.27	-0.15	-0.09	-0.19	1502.37
West Dike Station 10+00																		
W1000-64.5	River Side	1497.07	1497.08	1496.96	1496.96	1497.16	1497.18	1497.32	1497.22	1497.45	1497.27	1497.21	0.14	0.13	-0.01	-0.24	-0.06	1497.17
W1000-57.5	River Side	1496.22	1496.27	1496.11	1496.10	1496.32	1496.22	1496.28	1496.32	1496.43	1496.34	1496.21	-0.01	-0.06	-0.11	-0.22	-0.13	1496.26
W1000-54.5	River Side	1495.57	1495.57	1495.52	1495.52	1495.88	1495.91	1495.85	1495.84	1495.96	1495.93	1495.92	0.35	0.35	0.08	-0.04	-0.01	1495.77
W1000-38.8	River Side	1495.22	1495.27	1495.22	1495.28	1495.25	1495.25	1495.23	1495.25	1495.23	1495.25	1495.27	0.05	0.00	0.02	0.04	0.02	1495.25
W1000-7.2	River Side	1507.22	1507.02	1506.98	1506.79	1506.69	1506.77	1506.73	1507.08	1506.78	1506.73	1506.74	-0.48	-0.28	-0.34	-0.04	0.01	1506.87
W1000-0	Baseline	1507.22	1507.02	1507.15	1507.15	1507.15	1507.16	1507.15	1507.16	1507.15	1507.17	1507.16	-0.06	0.14	0.00	0.01	-0.01	1507.15
W1000-5.6	CELA Side	1507.32	1507.29	1507.28	1507.23	1507.21	1507.19	1507.14	1507.27	1507.26	1507.20	1507.31	-0.01	0.02	0.04	0.05	0.11	1507.25
W1000-13.3	CELA Side	1503.32	1502.99	1502.90	1502.85	1502.86	1502.73	1502.82	1502.90	1502.87	1502.90	1502.90	-0.42	-0.09	0.00	0.03	0.00	1502.91
W1000-14.7	CELA Side		1502.70	1502.66	1502.64	1502.59	1502.57	1502.25	1502.57	1502.54	1502.56	1502.29		-0.41	-0.28	-0.25	-0.27	1502.54
West Dike Station 12+00																		
W1200-89.0	River Side					1494.95	1492.95	1493.22	1493.27	1493.01	1493.08							1493.41
W1200-87.0	River Side					1492.11	1491.90	1492.18	1491.89	1491.45	1491.79							1491.89
W1200-84.0	River Side	1495.17	1495.29	1495.18	1495.23							1491.57						1494.49
W1200-75.5	River Side	1495.17	1494.95	1494.63	1494.56													1494.83
W1200-74.0	River Side	1493.32	1493.22	1493.05	1492.97	1490.10												1492.53
W1200-70.0	River Side										1495.22	1495.14						1495.18
W1200-68.5	River Side		1491.70															1491.70
W1200-62.3	River Side	1494.22	1494.21	1494.14	1494.19							1492.35						1493.82
W1200-60.4	River Side					1493.91	1493.82	1494.14	1494.08	1494.04	1494.03							1494.00
W1200-60.3	River Side											1495.41						1495.41
W1200-44.2	River Side	1493.67	1493.67	1494.00	1493.52	1494.06	1493.82	1494.10	1494.10	1494.05	1494.07	1494.08	0.41	0.41	-0.02	0.03	0.01	1493.92
W1200-8.0	River Side	1508.07	1507.95	1507.75	1507.73	1507.60	1507.74	1507.73	1507.72	1507.79	1507.79	1507.61	-0.46	-0.34	-0.12	-0.11	-0.18	1507.77
W1200-0	Baseline	1508.17	1508.10	1508.10	1508.11	1508.11	1508.11	1508.12	1508.13	1508.11	1508.09	1508.08	-0.09	-0.02	-0.05	-0.03	-0.01	1508.11
W1200-5.7	CELA Side	1508.17																1508.17
W1200-6.0	CELA Side		1508.11	1508.01	1507.91	1508.00	1508.07	1507.86	1508.05	1507.91	1507.87	1508.00		-0.11	-0.05	0.09	0.13	1507.98
W1200-13.4	CELA Side		1504.40	1504.34	1504.34	1504.29	1504.26	1504.25	1504.26	1504.42	1504.32	1504.33		-0.07	0.07	-0.09	0.01	1504.32
W1200-15.5	CELA Side	1503.52	1504.42	1504.30	1504.13	1504.05	1503.99	1504.06	1504.05	1504.08	1504.05	1503.89	0.37	-0.53	-0.16	-0.19	-0.16	1504.05
West Dike Station 14+00																		
W1400-83.0	River Side	1496.92	1496.88	1496.88	1496.90	1496.88												1496.89
W1400-73.5	River Side	1497.62	1497.68	1497.68	1497.70	1497.68												1497.67
W1400-70.0	River Side	1495.12	1495.23	1495.41	1495.53	1495.06	1495.18	1495.17	1495.18	1495.20	1495.22	1495.14	0.02	-0.09	-0.04	-0.06	-0.08	1495.22
W1400-60.3	River Side	1495.47	1495.46	1495.43	1495.52	1495.46	1495.46	1495.47	1495.49	1495.44	1495.48	1495.41	-0.06	-0.05	-0.08	-0.03	-0.07	1495.46
W1400-53.4	River Side	1494.87	1494.85	1494.81	1495.01	1495.33	1495.20	1495.06	1495.11	1495.44	1494.99	1495.10	0.23	0.25	-0.01	-0.34	0.11	1495.07

Notes: Negative change indicates a decrease in elevation.
Positive change indicates an increase in elevation.

Table 1

Genesee River Dike Surveyed Elevations (1992-2006)
Former Sinclair Refinery Site (OU-1)
Wellsville, New York
(ft amsl)

Station & Distance From Baseline	Location Description	1992 Elevation	1993 Elevation	1994 Elevation	1995 Elevation	1996 Elevation	1997 Elevation	1998 Elevation	1999 Elevation	2000 Elevation	2001 Elevation	2006 Elevation	Change From 1992 to 2006	Change From 1993 to 2006	Change From 1999 to 2006	Change From 2000 to 2006	Change from 2001 to 2006	Average Elevation
West Dike Station 14+00 Continued																		
W1400-41.6	River Side	1494.47	1494.50	1494.42	1494.52	1494.51	1494.51	1494.46	1494.47	1494.46	1494.48	1494.99	0.52	0.49	0.52	0.53	0.51	1494.53
W1400-7.0	River Side	1508.57	1508.50	1508.42	1508.47	1508.42	1508.14	1508.39	1508.38	1508.40	1508.42	1508.39	-0.18	-0.11	0.01	-0.01	-0.03	1508.41
W1400-0	Baseline	1508.37	1508.27	1508.26	1508.30	1508.28	1508.27	1508.25	1508.29	1508.28	1508.29	1508.28	-0.09	0.01	-0.01	0.00	-0.01	1508.29
W1400-6.2	CELA Side	1508.42																1508.42
W1400-6.3	CELA Side		1508.31	1508.29	1508.17	1508.15	1508.21	1508.18	1508.22	1508.25	1508.24	1508.37		0.06	0.15	0.12	0.13	1508.24
W1400-12.5	CELA Side		1505.10	1505.01	1505.06	1504.96	1504.74	1504.69	1504.97	1504.95	1504.85	1504.87		-0.23	-0.10	-0.08	0.02	1504.92
W1400-17.0	CELA Side	1502.87	1504.48	1504.35	1504.42	1504.03	1504.04	1504.01	1504.05	1504.03	1504.12	1504.15	1.28	-0.33	0.10	0.12	0.03	1504.05
West Dike Station 16+00																		
W1600-76.0	River Side	1496.95	1496.82	1496.75	1496.69	1496.86	1496.84	1497.06	1496.99	1497.26	1497.16	1497.55	0.60	0.73	0.56	0.29	0.39	1496.99
W1600-58.0	River Side	1496.80	1496.82	1496.24	1496.85	1496.71	1496.98	1496.73	1497.12	1497.35	1497.93	1497.25	0.45	0.43	0.13	-0.10	-0.68	1496.98
W1600-41.2	River Side	1496.60	1496.60	1496.47	1496.76	1496.90	1496.94	1497.01	1497.14	1497.41	1497.21	1497.51	0.91	0.91	0.37	0.10	0.30	1496.96
W1600-6.6	River Side	1509.45	1509.41	1509.36	1509.40	1509.32	1509.31	1509.32	1509.29	1509.24	1509.27	1509.23	-0.22	-0.18	-0.06	-0.01	-0.04	1509.33
W1600-0	Baseline	1508.85	1508.74	1508.74	1508.79	1508.79	1508.78	1508.79	1508.79	1508.76	1508.76	1508.75	-0.10	0.01	-0.04	-0.01	-0.01	1508.78
W1600-8.3	CELA Side	1508.75	1508.72	1508.67	1508.66	1508.73	1508.61	1508.65	1508.67	1508.66	1508.69	1508.78	0.03	0.06	0.11	0.12	0.09	1508.69
W1600-14.0	CELA Side		1506.38	1506.32	1506.33	1506.27	1505.93	1506.25	1506.23	1506.19	1506.12	1506.07		-0.31	-0.16	-0.12	-0.05	1506.21
W1600-19.2	CELA Side	1503.25	1505.62	1505.56	1505.60	1505.54	1505.33	1505.55	1505.50	1505.32	1505.46	1505.47	2.22	-0.15	-0.03	0.15	0.01	1505.29
West Dike Station 18+00																		
W1800-56.0	River Side	1495.45																1495.45
W1800-52.4	River Side											1495.21						1495.21
W1800-52.3	River Side	1496.10	1496.13	1495.73														1495.99
W1800-51.8	River Side				1496.10	1496.10	1495.43	1495.97	1495.94	1496.25	1495.90							1495.96
W1800-43.0	River Side	1497.65	1497.65	1497.58	1497.63	1497.58	1497.95	1497.79	1497.80	1497.80	1497.80	1497.74	0.09	0.09	-0.06	-0.06	-0.06	1497.72
W1800-27.0	River Side	1502.85	1502.87	1502.76	1502.85	1502.77	1502.80	1502.82	1502.77	1502.72	1502.71	1502.31	-0.54	-0.56	-0.46	-0.41	-0.40	1502.75
W1800-20.7	River Side	1503.60	1503.66	1503.40	1503.61	1503.59	1503.51	1503.51	1503.47	1503.64	1503.47	1503.48	-0.12	-0.18	0.01	-0.16	0.01	1503.54
W1800-6.3	River Side	1509.65	1509.65	1509.53	1509.56	1509.47	1509.47	1509.46	1509.46	1509.45	1509.45	1509.41	-0.24	-0.24	-0.05	-0.04	-0.04	1509.51
W1800-0	Baseline	1508.95	1508.98	1508.70	1508.72	1508.70	1508.74	1508.75	1508.75	1508.74	1508.74	1508.73	-0.22	-0.25	-0.02	-0.01	-0.01	1508.77
W1800-7.5	CELA Side	1509.10	1509.07	1508.69	1508.88	1508.73	1508.88	1508.83	1508.77	1508.85	1508.84	1508.83	-0.27	-0.24	0.06	-0.02	-0.01	1508.86
W1800-14.5	CELA Side		1505.90	1506.10	1506.12	1506.07	1506.09	1506.07	1506.03	1506.03	1506.02	1505.78		-0.12	-0.25	-0.25	-0.24	1506.02
W1800-17.4	CELA Side	1503.85	1505.84	1505.78	1505.81	1505.76	1505.74	1505.69	1505.73	1505.72	1505.72	1505.39	1.54	-0.45	-0.34	-0.33	-0.33	1505.55
West Dike Station 20+00																		
W2000-196.0	River Side	1501.76																1501.76
W2000-179.0	River Side	1496.31																1496.31
W2000-177.5	River Side				1496.39													1496.39
W2000-150.0	River Side	1495.91																1495.91
W2000-135.0	River Side	1495.21																1495.21
W2000-126.6	River Side				1496.00													1496.00
W2000-107.0	River Side	1495.31																1495.31
W2000-104.7	River Side				1495.16													1495.16

Notes: Negative change indicates a decrease in elevation.
Positive change indicates an increase in elevation.

Table 1

Genesee River Dike Surveyed Elevations (1992-2006)
Former Sinclair Refinery Site (OU-1)
Wellsville, New York
(ft amsl)

Station & Distance From Baseline	Location Description	1992 Elevation	1993 Elevation	1994 Elevation	1995 Elevation	1996 Elevation	1997 Elevation	1998 Elevation	1999 Elevation	2000 Elevation	2001 Elevation	2006 Elevation	Change From 1992 to 2006	Change From 1993 to 2006	Change From 1999 to 2006	Change From 2000 to 2006	Change from 2001 to 2006	Average Elevation
West Dike Station 20+00 Continued																		
W2000-90.0	River Side	1494.01			1494.01													1494.01
W2000-77.9	River Side				1493.42													1493.42
W2000-62.9	River Side				1492.36													1492.36
W2000-56.0	River Side	1493.21	1493.21		1494.06													1493.49
W2000-52.0	River Side	1495.96	1496.00	1495.46	1496.00	1495.96	1495.93	1495.66	1495.69	1496.24	1495.62							1495.85
W2000-42.8	River Side	1496.26	1496.39	1496.57	1496.69	1496.80	1497.05	1497.08	1497.19	1497.39	1497.04							1496.85
W2000-19.6	River Side	1504.71	1504.72	1504.25	1504.64	1504.63	1504.63	1504.60	1504.64	1504.60	1504.59							1504.60
W2000-5.8	River Side	1509.71	1509.78	1509.68	1509.75	1509.65	1509.59	1509.52	1509.55	1509.52	1509.51	1509.54	-0.17	-0.24	-0.01	0.02	0.03	1509.62
W2000-0	Baseline	1509.31	1509.31	1509.24	1509.26	1509.26	1509.23	1509.23	1509.25	1509.25	1509.23	1509.24	-0.07	-0.07	-0.01	-0.01	0.01	1509.26
W2000-8.0	CELA Side	1509.36																1509.36
W2000-9.0	CELA Side		1509.14	1508.93	1509.03	1508.90	1508.89	1509.01	1509.06	1509.09	1509.03	1509.08		-0.06	0.02	-0.01	0.05	1509.02
W2000-16.4	CELA Side		1505.42	1505.42	1505.33	1505.26	1505.38	1505.35	1505.39	1505.40	1505.79	1505.20		-0.22	-0.19	-0.20	-0.59	1505.39
W2000-19.4	CELA Side	1503.56	1505.05	1505.06	1504.99	1504.87	1504.93	1504.95	1504.97	1504.87	1504.90	1504.84	1.28	-0.21	-0.13	-0.03	-0.06	1504.82
West Dike Station 22+00																		
W2200-65.0	River Side	1494.71	1494.81	1494.81	1494.71													1494.76
W2200-55.0	River Side	1495.56	1495.62	1495.42	1496.51	1495.47	1496.02	1496.36	1496.20	1496.48	1496.37							1496.00
W2200-49.0	River Side	1498.41	1498.43	1498.37	1498.40	1498.34	1498.30	1498.33	1498.32	1498.33	1498.33	1498.30	-0.11	-0.13	-0.02	-0.03	-0.03	1498.35
W2200-40.6	River Side	1498.51	1498.55	1498.76	1498.66	1498.90	1498.74	1498.64	1498.73	1498.71	1498.67	1498.76	0.25	0.21	0.03	0.05	0.09	1498.69
W2200-19.8	River Side	1504.56	1504.55	1504.51	1505.00	1504.56	1505.06	1505.05	1505.00	1504.99	1505.02	1505.01	0.45	0.46	0.01	0.02	-0.01	1504.85
W2200-6.3	River Side	1509.96	1509.99	1509.84	1510.02	1510.05	1510.03	1510.01	1510.01	1509.98	1509.98	1509.92	-0.04	-0.07	-0.09	-0.06	-0.06	1509.98
W2200-0	Baseline	1509.96	1509.88	1509.85	1509.88	1509.86	1509.85	1509.85	1509.86	1509.85	1509.83	1509.82	-0.14	-0.06	-0.04	-0.03	-0.01	1509.86
W2200-7.3	CELA Side	1509.69	1509.73	1509.64	1509.66	1509.67	1509.63	1509.69	1509.76	1509.72	1509.67	1509.60	-0.09	-0.13	-0.16	-0.12	-0.07	1509.68
W2200-16.6	CELA Side	1504.66		1504.51	1504.62	1504.53	1504.55	1504.62	1504.63	1504.55	1504.62	1504.63	-0.03		0.00	0.08	0.01	1504.59
W2200-17.7	CELA Side	1504.31	1504.58	1504.47	1504.34	1504.58	1504.54	1504.59	1504.56	1504.59	1504.52	1504.52	0.21	-0.06	-0.04	-0.07	0.00	1504.51
													Maximum Change	3.00	0.91	0.56	0.53	0.51
													Minimum Change	-1.27	-1.27	-1.11	-0.94	-0.78
													Average Change	0.09	0.01	-0.02	-0.02	-0.01

Notes: Negative change indicates a decrease in elevation.
Positive change indicates an increase in elevation.

Table 2

**2009 Daily Average Stage and Discharge
Genesee River at Wellsville, New York
USGS Station 04221000**

Date	Stage (ft)	Discharge (cu ft/sec)
1/1/2009	5.43	597.77
1/2/2009	5.40	556.17
1/3/2009	5.30	494.21
1/4/2009	5.19	432.25
1/5/2009	5.16	419.06
1/6/2009	5.03	314.53
1/7/2009	5.06	359.64
1/8/2009	5.04	347.84
1/9/2009	4.96	300.36
1/10/2009	4.89	262.50
1/11/2009	4.90	233.98
1/12/2009	4.91	215.39
1/13/2009	4.84	200.00
1/14/2009	4.74	180.00
1/15/2009	4.75	175.00
1/16/2009	4.72	160.00
1/17/2009	4.74	155.00
1/18/2009	4.84	160.15
1/19/2009	4.85	170.00
1/20/2009	4.81	180.00
1/21/2009	4.77	160.00
1/22/2009	4.73	150.00
1/23/2009	4.69	140.00
1/24/2009	4.66	130.07
1/25/2009	4.59	120.00
1/26/2009	4.67	110.00
1/27/2009	4.68	104.51
1/28/2009	4.71	98.00
1/29/2009	4.69	99.67
1/30/2009	4.62	110.00
1/31/2009	4.59	99.67
2/1/2009	4.57	110.00
2/2/2009	4.56	116.97
2/3/2009	4.54	110.23
2/4/2009	4.53	104.50
2/5/2009	4.55	100.00
2/6/2009	4.65	98.00
2/7/2009	4.61	110.00
2/8/2009	5.98	339.67
2/9/2009	6.37	480.00
2/10/2009	5.62	600.00
2/11/2009	6.66	1400.00
2/12/2009	8.42	4412.60
2/13/2009	6.68	1846.02
2/14/2009	6.04	1123.42
2/15/2009	5.77	865.17
2/16/2009	5.54	672.21
2/17/2009	5.37	552.87
2/18/2009	5.31	457.15
2/19/2009	5.26	404.94
2/20/2009	5.11	360.19
2/21/2009	5.10	307.99
2/22/2009	5.04	278.15
2/23/2009	4.97	248.32
2/24/2009	4.98	233.41
2/25/2009	4.98	233.41
2/26/2009	4.95	322.90

Date	Stage (ft)	Discharge (cu ft/sec)
2/27/2009	6.02	1233.49
2/28/2009	6.10	1218.59
3/1/2009	5.50	646.12
3/2/2009	5.31	480.71
3/3/2009	5.24	397.48
3/4/2009	5.32	404.94
3/5/2009	5.26	397.48
3/6/2009	5.20	464.61
3/7/2009	5.56	698.44
3/8/2009	6.58	1768.29
3/9/2009	8.51	4583.68
3/10/2009	6.81	2004.59
3/11/2009	7.17	2503.28
3/12/2009	6.21	1297.92
3/13/2009	5.88	965.63
3/14/2009	5.70	810.51
3/15/2009	5.57	701.73
3/16/2009	5.45	609.96
3/17/2009	5.36	544.86
3/18/2009	5.28	496.17
3/19/2009	5.38	560.45
3/20/2009	5.24	467.35
3/21/2009	5.13	398.89
3/22/2009	5.10	377.77
3/23/2009	5.03	337.42
3/24/2009	4.96	301.26
3/25/2009	4.96	303.26
3/26/2009	5.00	323.49
3/27/2009	5.10	378.69
3/28/2009	4.98	312.13
3/29/2009	4.97	306.90
3/30/2009	4.98	312.24
3/31/2009	4.91	276.25
4/1/2009	4.91	273.38
4/2/2009	4.93	283.30
4/3/2009	5.00	327.59
4/4/2009	5.43	599.82
4/5/2009	5.19	435.45
4/6/2009	5.22	453.19
4/7/2009	5.20	444.26
4/8/2009	5.16	414.91
4/9/2009	5.11	384.40
4/10/2009	5.06	357.67
4/11/2009	5.17	422.58
4/12/2009	5.03	340.47
4/13/2009	4.98	311.48
4/14/2009	4.96	303.50
4/15/2009	4.99	316.85
4/16/2009	4.93	284.61
4/17/2009	4.87	255.16
4/18/2009	4.84	239.17
4/19/2009	4.82	226.93
4/20/2009	4.89	266.08
4/21/2009	4.91	273.53
4/22/2009	4.86	250.60
4/23/2009	4.85	244.85
4/24/2009	4.80	217.66

Date	Stage (ft)	Discharge (cu ft/sec)
4/25/2009	4.76	199.47
4/26/2009	4.72	181.98
4/27/2009	4.69	168.44
4/28/2009	4.68	163.22
4/29/2009	4.73	184.95
4/30/2009	4.68	164.07
5/1/2009	4.74	189.91
5/2/2009	4.95	297.02
5/3/2009	4.79	214.35
5/4/2009	4.74	189.68
5/5/2009	4.71	178.38
5/6/2009	4.71	176.34
5/7/2009	4.82	228.04
5/8/2009	4.77	205.90
5/9/2009	4.80	218.05
5/10/2009	4.75	195.12
5/11/2009	4.70	171.78
5/12/2009	4.67	160.41
5/13/2009	4.65	152.24
5/14/2009	4.65	153.79
5/15/2009	4.66	157.70
5/16/2009	4.71	179.39
5/17/2009	4.92	280.10
5/18/2009	4.71	178.22
5/19/2009	4.65	154.27
5/20/2009	4.62	141.00
5/21/2009	4.59	128.05
5/22/2009	4.56	117.44
5/23/2009	4.54	109.24
5/24/2009	4.52	103.74
5/25/2009	4.51	96.87
5/26/2009	4.52	100.86
5/27/2009	4.70	175.16
5/28/2009	4.73	218.61
5/29/2009	6.42	1578.08
5/30/2009	5.36	545.86
5/31/2009	5.12	389.91
6/1/2009	4.98	311.93
6/2/2009	4.91	274.78
6/3/2009	4.85	244.82
6/4/2009	4.79	213.48
6/5/2009	4.72	183.76
6/6/2009	4.70	173.44
6/7/2009	4.65	151.00
6/8/2009	4.65	151.31
6/9/2009	4.79	214.03
6/10/2009	4.64	149.16
6/11/2009	4.66	160.19
6/12/2009	5.10	384.19
6/13/2009	4.79	216.08
6/14/2009	4.69	170.49
6/15/2009	4.63	144.87
6/16/2009	4.59	128.24
6/17/2009	4.67	166.78
6/18/2009	5.19	437.34
6/19/2009	4.91	274.74
6/20/2009	6.34	1835.22

Date	Stage (ft)	Discharge (cu ft/sec)
6/21/2009	7.12	2447.92
6/22/2009	6.10	1183.29
6/23/2009	5.66	771.40
6/24/2009	5.41	581.17
6/25/2009	5.25	470.58
6/26/2009	5.48	651.75
6/27/2009	5.42	597.34
6/28/2009	5.16	420.23
6/29/2009	5.26	482.08
6/30/2009		629.00
7/1/2009	5.40	578.11
7/2/2009	5.51	652.24
7/3/2009	5.28	493.05
7/4/2009	5.16	414.60
7/5/2009	5.04	348.42
7/6/2009	4.96	303.73
7/7/2009	4.91	272.32
7/8/2009	4.83	234.61
7/9/2009	4.78	210.02
7/10/2009	4.73	184.77
7/11/2009	4.81	232.00
7/12/2009	5.03	342.28
7/13/2009	4.74	192.29
7/14/2009	4.66	155.57
7/15/2009	4.62	138.51
7/16/2009	4.59	128.88
7/17/2009	4.58	125.37
7/18/2009	4.60	131.43
7/19/2009	4.56	118.34
7/20/2009	4.52	103.49
7/21/2009	4.53	107.14
7/22/2009	4.58	125.56
7/23/2009	4.55	112.39
7/24/2009	4.53	105.85
7/25/2009	4.53	104.83
7/26/2009	4.56	118.44
7/27/2009	4.88	264.06
7/28/2009	4.61	135.34
7/29/2009	4.65	159.58
7/30/2009	5.18	437.81
7/31/2009	5.00	329.01
8/1/2009	4.94	293.30
8/2/2009	4.82	228.14
8/3/2009	4.78	211.08
8/4/2009	4.69	168.20
8/5/2009	4.69	171.34
8/6/2009	4.61	137.92
8/7/2009	4.58	124.60
8/8/2009	4.54	111.04
8/9/2009	5.43	635.47
8/10/2009	6.04	1149.75
8/11/2009	5.36	552.80
8/12/2009	5.60	774.38
8/13/2009	5.53	682.33
8/14/2009	5.16	416.02
8/15/2009	5.02	331.67
8/16/2009	4.91	274.73

Table 2

**2009 Daily Average Stage and Discharge
Genesee River at Wellsville, New York
USGS Station 04221000**

Date	Stage (ft)	Discharge (cu ft/sec)
8/17/2009	4.82	230.46
8/18/2009	4.82	229.73
8/19/2009	4.92	281.14
8/20/2009	4.82	228.87
8/21/2009	5.72	879.71
8/22/2009	5.37	563.34
8/23/2009	5.03	337.35
8/24/2009	4.90	268.81
8/25/2009	4.81	224.06
8/26/2009	4.78	209.98
8/27/2009	4.82	227.17
8/28/2009	4.72	182.72
8/29/2009	4.80	218.89
8/30/2009	4.78	210.29
8/31/2009	4.71	178.64
9/1/2009	4.64	149.69
9/2/2009	4.60	133.03
9/3/2009	4.57	120.20
9/4/2009	4.54	110.85
9/5/2009	4.52	103.30
9/6/2009	4.50	95.46
9/7/2009	4.48	89.87
9/8/2009	4.48	89.16
9/9/2009	4.47	84.24
9/10/2009	4.45	77.68
9/11/2009	4.44	74.68
9/12/2009	4.48	87.01
9/13/2009	4.46	82.03
9/14/2009	4.43	71.59
9/15/2009	4.41	66.01
9/16/2009	4.40	63.14
9/17/2009	4.39	60.22
9/18/2009	4.39	59.05
9/19/2009	4.38	56.30
9/20/2009	4.36	52.81
9/21/2009	4.36	50.28
9/22/2009	4.36	51.85
9/23/2009	4.39	59.88
9/24/2009	4.39	58.89
9/25/2009	4.37	53.83
9/26/2009	4.36	51.02
9/27/2009	4.56	121.40
9/28/2009	4.71	176.30
9/29/2009	4.64	149.85
9/30/2009	4.58	124.50
10/1/2009	4.53	104.36
10/2/2009	4.52	100.65
10/3/2009	4.80	219.68
10/4/2009	4.62	140.61
10/5/2009	4.54	109.24
10/6/2009	4.50	95.97
10/7/2009	4.51	97.72
10/8/2009	4.55	112.75
10/9/2009	4.52	102.35
10/10/2009	4.66	155.78
10/11/2009	4.60	134.09
10/12/2009	4.53	106.44


Date	Stage (ft)	Discharge (cu ft/sec)
10/13/2009	4.51	99.56
10/14/2009	4.50	96.69
10/15/2009	4.50	95.92
10/16/2009	4.59	128.87
10/17/2009	4.76	203.18
10/18/2009	4.92	278.93
10/19/2009	4.87	252.49
10/20/2009	4.76	202.28
10/21/2009	4.73	186.11
10/22/2009	4.70	175.07
10/23/2009	4.69	169.76
10/24/2009	5.12	405.36
10/25/2009	5.13	400.55
10/26/2009	4.93	282.94
10/27/2009	4.88	258.41
10/28/2009	5.33	553.65
10/29/2009	5.30	507.94
10/30/2009	5.11	385.15
10/31/2009	5.10	381.73
11/1/2009	5.07	361.92
11/2/2009	4.97	308.50
11/3/2009	4.92	282.09
11/4/2009	4.88	261.35
11/5/2009	4.86	246.98
11/6/2009	4.86	250.88
11/7/2009	4.81	224.07
11/8/2009	4.77	207.34
11/9/2009	4.73	187.75
11/10/2009	4.70	175.22
11/11/2009	4.68	164.67
11/12/2009	4.66	154.90
11/13/2009	4.64	148.65
11/14/2009	4.63	145.72
11/15/2009	4.63	143.24
11/16/2009	4.60	133.19
11/17/2009	4.58	125.35
11/18/2009	4.57	118.84
11/19/2009	4.61	135.49
11/20/2009	5.05	351.36
11/21/2009	4.81	222.14
11/22/2009	4.73	185.76
11/23/2009	4.69	168.96
11/24/2009	4.74	189.85
11/25/2009	4.78	209.93
11/26/2009	4.78	208.90
11/27/2009	4.80	218.11
11/28/2009	4.86	251.01
11/29/2009	4.85	242.66
11/30/2009	4.91	275.41
12/1/2009	4.91	276.51
12/2/2009	4.88	260.23
12/3/2009	5.74	884.12
12/4/2009	5.48	631.61
12/5/2009	5.32	517.64
12/6/2009	5.24	467.02
12/7/2009	5.15	412.59
12/8/2009	5.10	381.47

Date	Stage (ft)	Discharge (cu ft/sec)
12/9/2009	5.24	476.01
12/10/2009	5.53	675.43
12/11/2009	5.11	390.16
12/12/2009	5.11	360.00
12/13/2009	5.15	360.00
12/14/2009	5.24	466.85
12/15/2009	5.42	589.50
12/16/2009	5.34	533.28
12/17/2009	5.19	405.00
12/18/2009	5.15	369.00
12/19/2009	5.13	381.00
12/20/2009	5.09	340.00
12/21/2009	4.99	318.31
12/22/2009	4.96	300.00
12/23/2009	4.94	285.00
12/24/2009	4.95	293.81
12/25/2009	4.94	260.00
12/26/2009	5.90	1082.18
12/27/2009	6.19	1308.34
12/28/2009	5.64	752.06
12/29/2009	5.41	583.17
12/30/2009	5.38	530.00
12/31/2009	5.29	498.57

Note:

Provisional data provided by
USGS and is subject to change.

Site Location

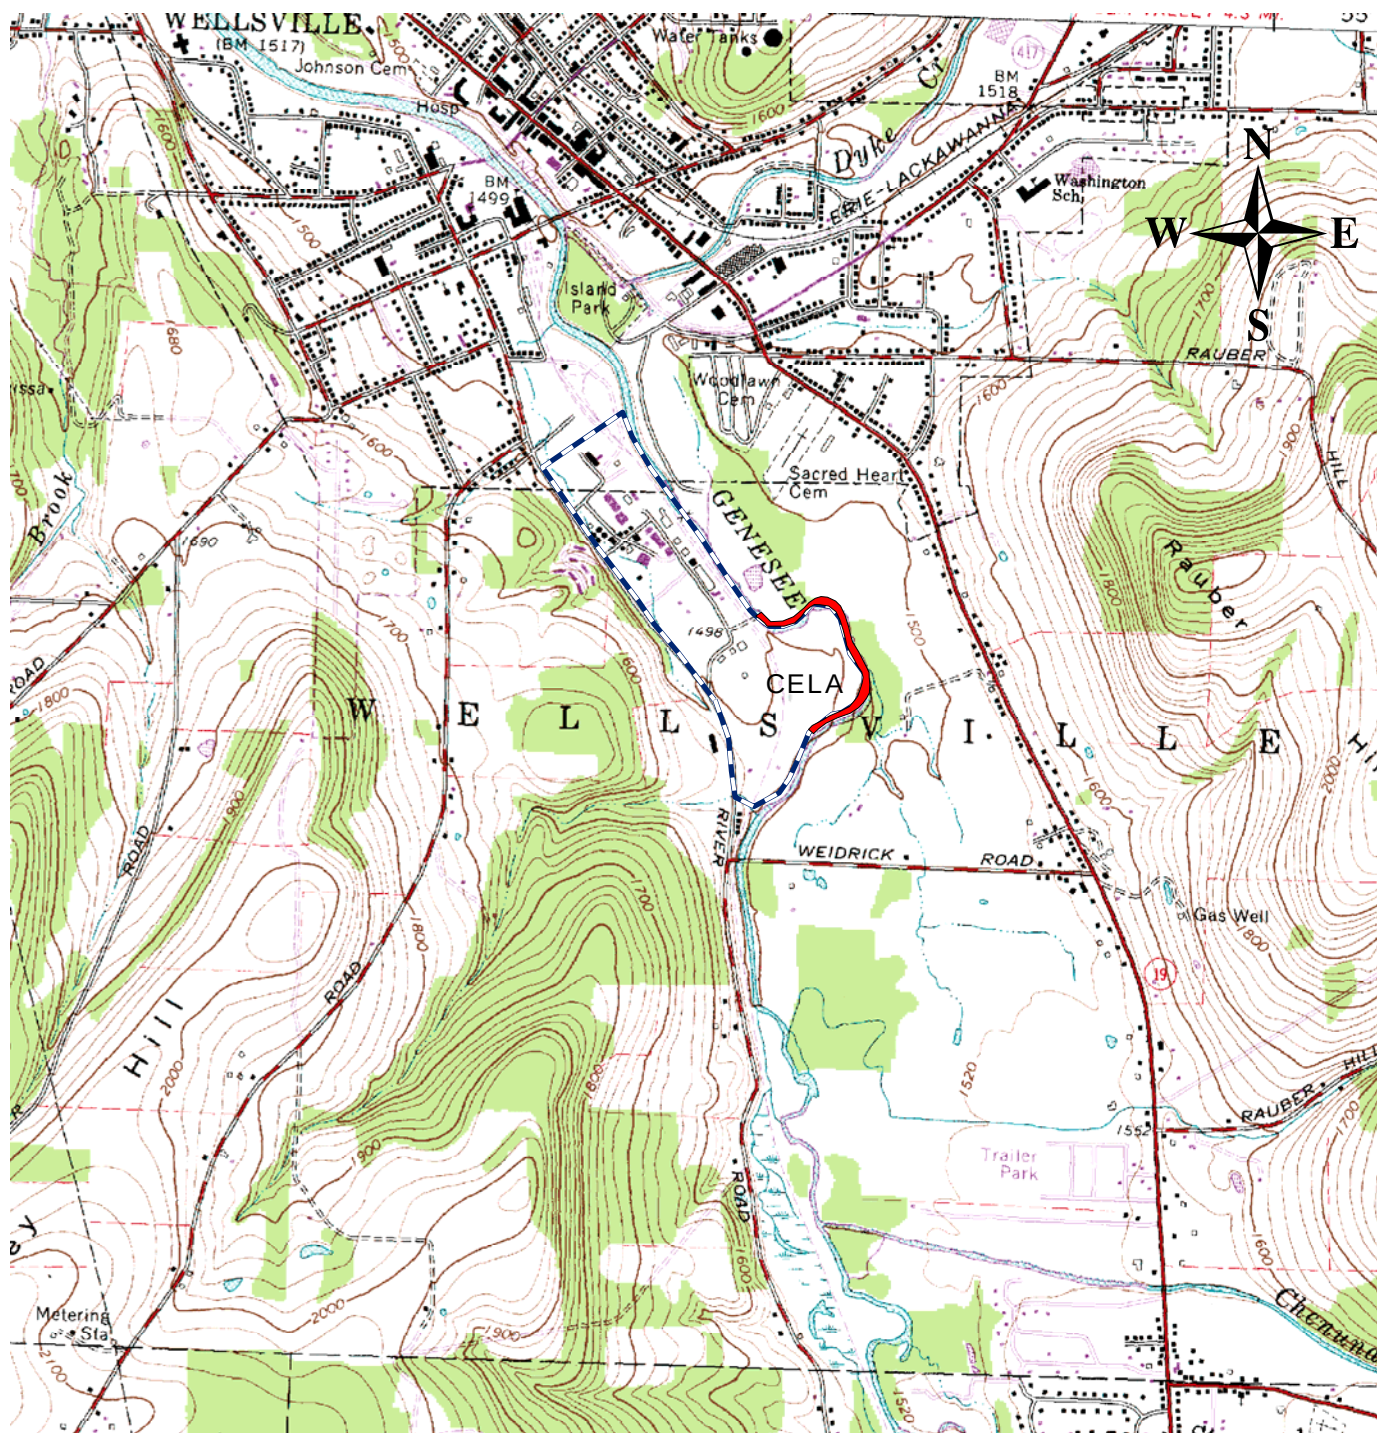

Source: Wellsville South New York USGS 7.5 Minute Topographic Quadrangle, 1965, Photorevised 1978

Legend



Approximate Site Boundary



Approximate Area of River Channelization

2,000 1,000 0 2,000
Feet

1 inch = 2,000 feet




ON-SITE TECHNICAL SERVICES, INC.

72 Railroad Avenue Wellsville, NY 14895

FIGURE NO.	1
PROJECT	WELLSVILLE OU-1
DOCUMENT	2009 RIVER REPORT
FILE NO.	SITELOC.MXD


EAST BANK & WEST DIKE STATION AND SURVEY CROSS-SECTION LOCATIONS

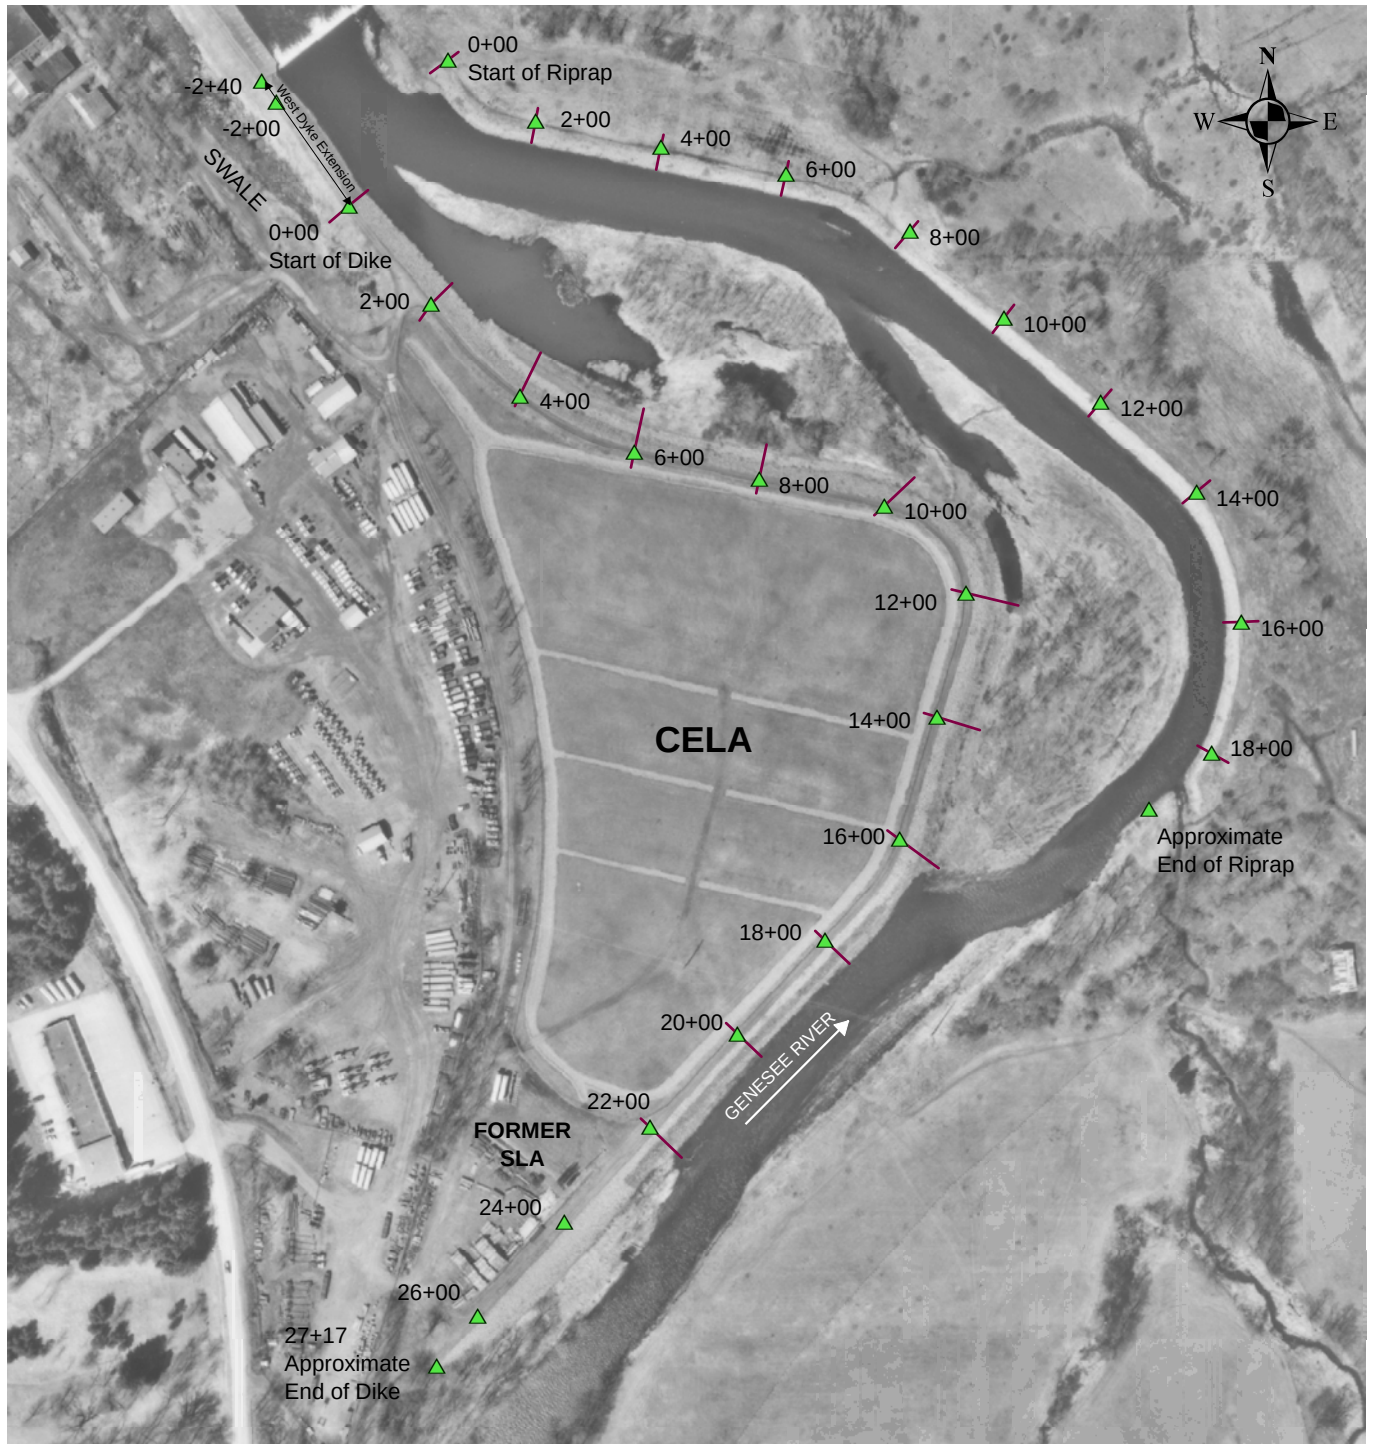

1999 Aerial Photograph

Legend

- ▲ Approximate Location of Dike Station
- Dike Survey Cross-Section Location




ON-SITE TECHNICAL SERVICES, INC.

72 Railroad Avenue Wellsville, NY 14895

FIGURE NO.	2
PROJECT	WELLSVILLE OU-1
DOCUMENT	2009 RIVER REPORT
FILE NO.	DIKE.MXD

Figure 3
Genesee River Daily Average Discharge and Stage
Wellsville, New York

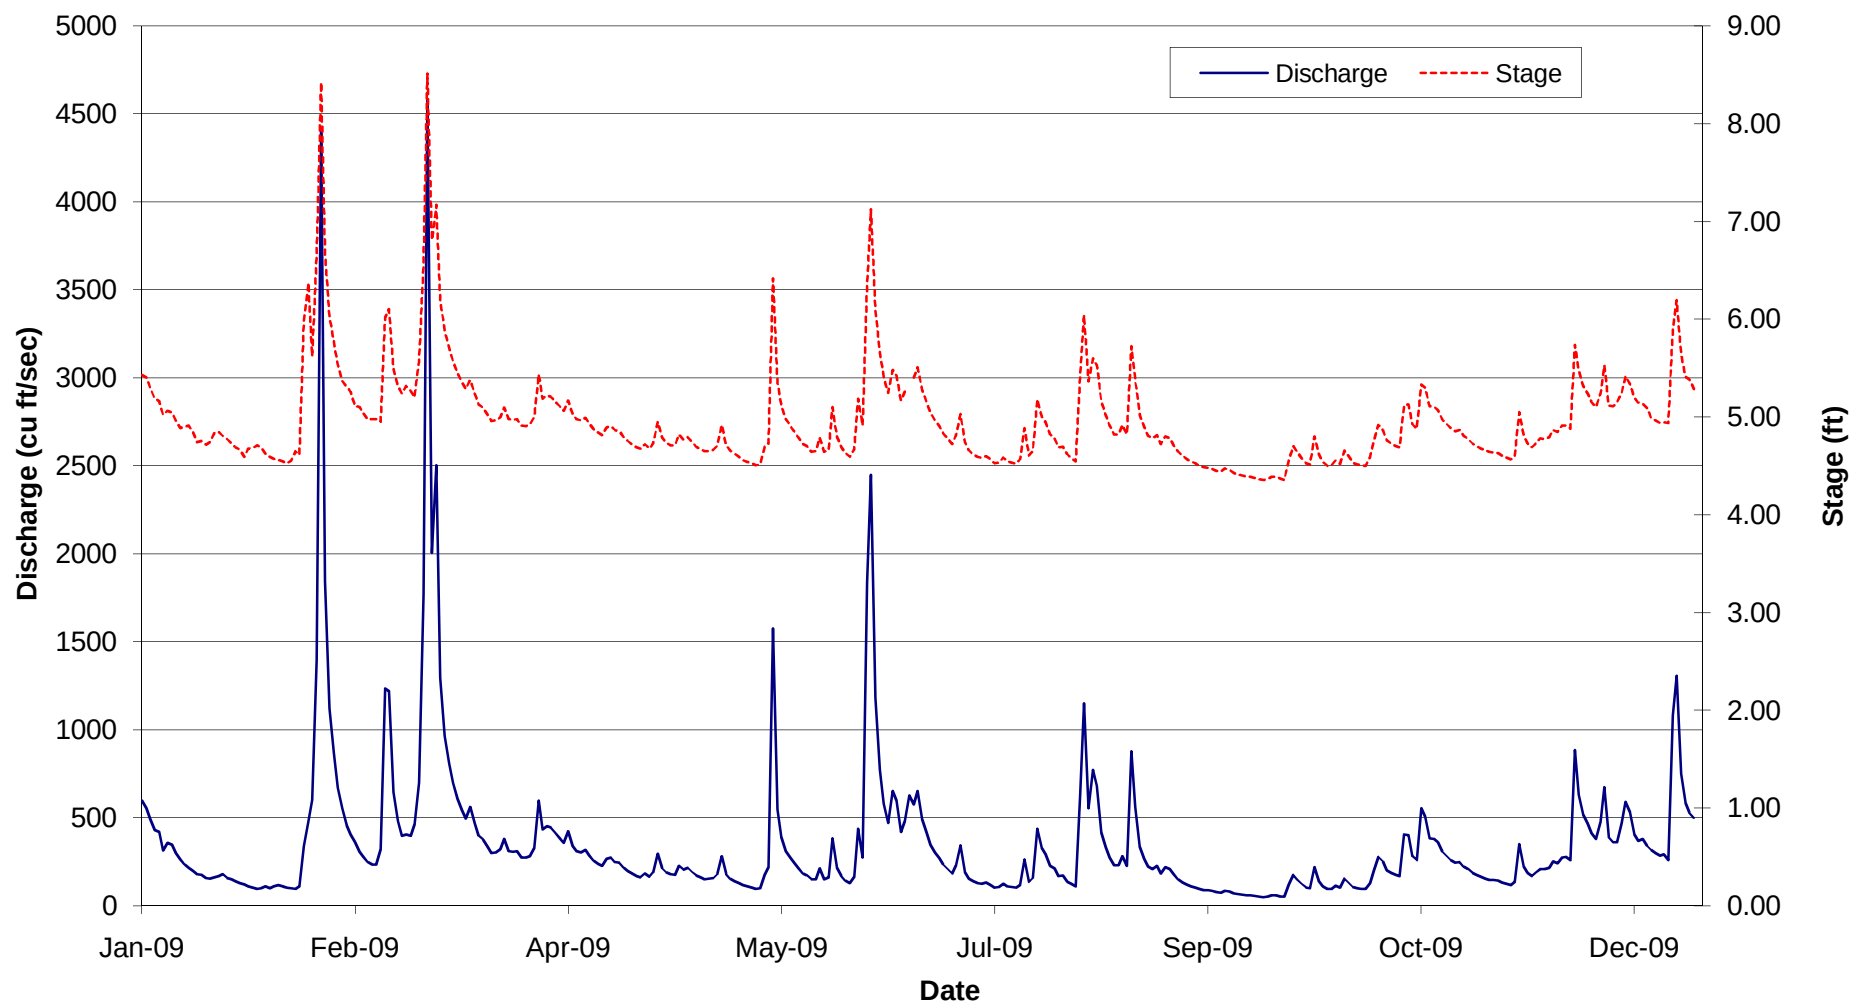

Note: Provisional data provided by USGS from the Wellsville, New York gauge station and is subject to revision

-----Original Message-----

From: Negrelli.Mike@epamail.epa.gov
[mailto:Negrelli.Mike@epamail.epa.gov]
Sent: Monday, June 27, 2005 4:08 PM
To: Hufford, Walter
Cc: mfmooore@gw.dec.state.ny.us
Subject: OUI Monitoring

Walt-

After discussion with Maurice, we agree to ARCO's proposal to suspend SVOC analysis from the CELA monitoring program as they have been non-detect since 1998. However, EPA reserves the right to have SVOC analysis resume should conditions at the CELA change at some point in the future that would lead us to believe the analysis should be resumed. Further, I believe we have previously agreed to your request to changing the soil pH analysis from annually to every three years, both in the CELA monitoring program and partial river channelization monitoring program. Please inform Jerry Palmer and Jon Brandis at On-Site Health and Safety of this determination.

If you have any questions on this matter, please do not hesitate to contact me.



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
REGION 2
290 BROADWAY
NEW YORK, NY 10007-1868

NYC 0 2302

BY FEDEX

Terry Moore
Environmental Manager
BP/ARCO Environmental Remediation, L.L.C.
1701 Summit Avenue, Suite 2
Plano, TX 75074

Re: Sinclair Refinery Site, Wellsville, New York

Dear Mr. Moore:

This letter is in response to the Atlantic Richfield Company's ("ARCO's") letter to the U.S. Environmental Protection Agency ("EPA"), dated April 24, 2002, regarding proposed modifications to certain Operation and Maintenance (O&M) requirements for the first operable unit (OU1) at the Sinclair Refinery site in Wellsville, New York. Specifically, ARCO's letter requests modifications to the frequency of elevation surveys of the river channel and banks associated with OU1 and discontinuation of analyzing dissolved metals in the annual ground water sampling (total metals will continue to be analyzed).

ARCO notes that the O&M Manual for OU1 states that the frequency of surveying of cross sections of the dikes will depend on significant changes in surveying data. (the elevation surveys of the river bed have no corresponding mention of changing the frequency based on observations). Surveys performed by ARCO annually for the past ten years have indicated no significant changes in survey data for either the dike cross sections or river bed. Accordingly, EPA approves modifying the survey frequency from annually to every five years. As ARCO notes in its letter, annual inspections and periodic patrols following high water events shall continue.

ARCO also requests a discontinuation of the analysis for dissolved metals in the annual ground water sampling. This request is based on recent sampling events showing metals to be below MCLs and a good correlation between dissolved and total metals concentrations (ARCO will continue to perform total metals analysis annually). Therefore, EPA approves of ARCO's proposal to discontinue dissolved metals analysis in the annual ground water sampling at OU1. However, at the request of the New York State Department of Environmental Conservation (NYSDEC), this approval shall be effective starting with the 2003 annual sampling event in order to allow the NYSDEC to collect split samples during the 2002 sampling event. Please contact Maurice Moore at the NYSDEC regional office (716-851-7220) at least two weeks prior to the sampling event in order to make arrangements.

Internet Address (URL) • <http://www.epa.gov>

Recycled/Recyclable • Printed with Vegetable Oil Based Inks on Recycled Paper (Minimum 50% Postconsumer content)


11/13/02 12:17

TX/RX NO.5409

P.004

If you have any questions on this matter, please contact me at (212) 637-4278 or by email at negrelli.mike@epa.gov.

Sincerely yours,



Michael J. Negrelli
Remedial Project Manager
New York Remediation Branch

cc: Wayne Mizerak - NYSDEC
Maurice Moore - NYSDEC/R.9

SINCLAIR REFINERY SITE
PARTIAL RIVER CHANNELIZATION
GENESEE RIVER
WELLSVILLE, NEW YORK

APPENDIX A

INSPECTION CHECKLIST

Inspection By: S. Watson K. Dye Sheet 1 of 2

Title: Field Tech Date: 3-24-09

Verified By: _____

Title: _____ Date: _____

Type of Inspection (check only one):

- ☐ Annual during low flow.
☒ Immediately after a high water period.
☐ Other (explain)

Dike Station 0+00 to 18+00 (East/West) EAST

Item Description	Condition*/Remarks
1. Settlement, sloughing or, ✓ loss of grade.	
2. Caving (either side of dike) ✓	
3. Seepage, saturated areas, ✓ or sand boils.	
4. Riprap slope protection- evidence of displacement ✓ or unusual settlement, woody growth in riprap.	
5. Access roads ✓	
6. Unauthorized traffic ✓	

* Indicate satisfactory condition with a check; briefly describe conditions other than satisfactory; use additional sheets if more space is needed.

Observations and recommendations:

SINCLAIR REFINERY SITE
PARTIAL RIVER CHANNELIZATION
GENESEE RIVER
WELLSVILLE, NEW YORK

APPENDIX A

INSPECTION CHECKLIST

Inspection By: S. Watson K. Dye Sheet 2 of 2

Title: Field Tech Date: 3-24-09

Verified By: _____

Title: _____ Date: _____

Type of Inspection (check only one):

- ☐ Annual during low flow.
☒ Immediately after a high water period.
☐ Other (explain)

Dike Station 0+00 to 18+00 (East/West) EAST

Item Description	Condition*/Remarks
7. Accumulation of drift, trash, and debris. ✓	
8. Vegetative cover including soil pH check ✓	
9. Weeds or undesirable vegetation. ✓	
10. Unauthorized excavation, loose backfill or sod removal. ✓	
11. Burrowing animals. ✓	
12. Evidence of fires/vandalism ✓	
13. Routine mowing ✓	
14. Shoaling check (photograph) ✓	

* Indicate satisfactory condition with a check; briefly describe conditions other than satisfactory; use additional sheets if more space is needed.

Observations and recommendations:

SINCLAIR REFINERY SITE
PARTIAL RIVER CHANNELIZATION
GENESEE RIVER
WELLSVILLE, NEW YORK

APPENDIX A

INSPECTION CHECKLIST

Inspection By: S. Watson K. Dye Sheet 1 of 2

Title: Field Tech Date: 3-24-09

Verified By: _____

Title: _____ Date: _____

Type of Inspection (check only one):

- ☐ Annual during low flow.
☒ Immediately after a high water period.
☐ Other (explain)

Dike Station -2+40 to 26+00 (East/West) west

Item Description	Condition*/Remarks
1. Settlement, sloughing or, ✓ loss of grade.	
2. Caving (either side of dike) ✓	
3. Seepage, saturated areas, ✓ or sand boils.	
4. Riprap slope protection- ✓ evidence of displacement or unusual settlement, woody growth in riprap.	
5. Access roads ✓	
6. Unauthorized traffic ✓	

* Indicate satisfactory condition with a check; briefly describe conditions other than satisfactory; use additional sheets if more space is needed.

Observations and recommendations:

SINCLAIR REFINERY SITE
PARTIAL RIVER CHANNELIZATION
GENESEE RIVER
WELLSVILLE, NEW YORK

APPENDIX A

INSPECTION CHECKLIST

Inspection By: S. Watson K. Dye Sheet 2 of 2

Title: Field Tech Date: 3-24-09

Verified By: _____

Title: _____ Date: _____

Type of Inspection (check only one):

- ☐ Annual during low flow.
☒ Immediately after a high water period.
☐ Other (explain)

Dike Station -2+40 to 26+00 (East West) West

Item Description	Condition*/Remarks
7. Accumulation of drift, ✓ trash, and debris.	
8. Vegetative cover including ✓ soil pH check	
9. Weeds or undesirable ✓ vegetation.	
10. Unauthorized excavation, ✓ loose backfill or sod removal.	
11. Burrowing animals. ✓	
12. Evidence of fires/vandalism ✓	
13. Routine mowing ✓	
14. Shoaling check (photograph) ✓	

* Indicate satisfactory condition with a check; briefly describe conditions other than satisfactory; use additional sheets if more space is needed.

Observations and recommendations:



6+00 facing north



16+00 facing south

SINCLAIR REFINERY SITE
PARTIAL RIVER CHANNELIZATION
GENESEE RIVER
WELLSVILLE, NEW YORK

APPENDIX A

INSPECTION CHECKLIST

Inspection By: S. Watson Sheet 1 of 2

Title: _____ Date: 4/28/09

Verified By: _____

Title: _____ Date: _____

Type of Inspection (check only one):

- ☒ Annual during low flow.
☐ Immediately after a high water period.
☐ Other (explain)

Dike Station -2+40 to 26+00 (East/West) _____

Item Description	Condition*/Remarks
1. Settlement, sloughing or, ✓ loss of grade.	
2. Caving (either side of dike) ✓	
3. Seepage, saturated areas, ✓ or sand boils.	
4. Riprap slope protection- ✓ evidence of displacement or unusual settlement, woody growth in riprap.	
5. Access roads ✓	
6. Unauthorized traffic ✓	

* Indicate satisfactory condition with a check; briefly describe conditions other than satisfactory; use additional sheets if more space is needed.

Observations and recommendations:

SINCLAIR REFINERY SITE
PARTIAL RIVER CHANNELIZATION
GENESEE RIVER
WELLSVILLE, NEW YORK

APPENDIX A

INSPECTION CHECKLIST

Inspection By: S. Watson Sheet 2 of 2

Title: _____ Date: 4/28/09

Verified By: _____

Title: _____ Date: _____

Type of Inspection (check only one):

- ☒ Annual during low flow.
☐ Immediately after a high water period.
☐ Other (explain)

Dike Station -2+40 to 26+00 (East/West) West

<u>Item Description</u>	<u>Condition*/Remarks</u>
7. Accumulation of drift, trash, and debris. ✓	
8. Vegetative cover including soil pH check <i>NA</i> ✓	
9. Weeds or undesirable vegetation. ✓	
10. Unauthorized excavation, loose backfill or sod removal. ✓	
11. Burrowing animals. ✓	
12. Evidence of fires/vandalism ✓	
13. Routine mowing ✓	
14. Shoaling check (photograph) ✓	

* Indicate satisfactory condition with a check; briefly describe conditions other than satisfactory; use additional sheets if more space is needed.

Observations and recommendations:

SINCLAIR REFINERY SITE
PARTIAL RIVER CHANNELIZATION
GENESEE RIVER
WELLSVILLE, NEW YORK

APPENDIX A

INSPECTION CHECKLIST

Inspection By: S. Watson Sheet 1 of 2

Title: _____ Date: 4/28/09

Verified By: _____

Title: _____ Date: _____

Type of Inspection (check only one):

- ☒ Annual during low flow.
☐ Immediately after a high water period.
☐ Other (explain)

Dike Station 0+00 to 18+00 (East/West) EAST

Item Description	Condition*/Remarks
1. Settlement, sloughing or, ✓ loss of grade.	
2. Caving (either side of dike) ✓	
3. Seepage, saturated areas, ✓ or sand boils.	
4. Riprap slope protection- ✓ evidence of displacement or unusual settlement, woody growth in riprap.	
5. Access roads ✓	
6. Unauthorized traffic ✓	

* Indicate satisfactory condition with a check; briefly describe conditions other than satisfactory; use additional sheets if more space is needed.

Observations and recommendations:

SINCLAIR REFINERY SITE
PARTIAL RIVER CHANNELIZATION
GENESEE RIVER
WELLSVILLE, NEW YORK

APPENDIX A

INSPECTION CHECKLIST

Inspection By: S. Watson Sheet 2 of 2

Title: _____ Date: 4/28/09

Verified By: _____

Title: _____ Date: _____

Type of Inspection (check only one):

- ☒ Annual during low flow.
☐ Immediately after a high water period.
☐ Other (explain)

Dike Station 0+00 to 18+00 (East/West) EAST

<u>Item Description</u>	<u>Condition*/Remarks</u>
7. Accumulation of drift, ✓ trash, and debris.	
8. Vegetative cover including ✓ soil pH check NA	
9. Weeds or undesirable ✓ vegetation.	
10. Unauthorized excavation, ✓ loose backfill or sod removal.	
11. Burrowing animals. ✓	
12. Evidence of fires/vandalism ✓	
13. Routine mowing ✓	
14. Shoaling check (photograph) ✓	

* Indicate satisfactory condition with a check; briefly describe conditions other than satisfactory; use additional sheets if more space is needed.

Observations and recommendations:



0+00 facing south



4+00 facing north