

The electronic version of this file/report should have the file name:

Type of document.Spill Number.Year-Month.File Year-Year or Report name.pdf

letter. _____ . _____ - _____ .File spillfile _____ .pdf

report. hw 905020 . 1993 - 02-01 . SUPPORTING DOCUMENTS .pdf
FOR PRELIMINARY SITE ASSESSMENT

Project Site numbers will be proceeded by the following:

Municipal Brownfields - b

Superfund - hw

Spills - sp

ERP - e

VCP - v

BCP - c

non-releasable - put .nf.pdf

Example: letter.sp9875693.1998-01.Filespillfile.nf.pdf

905020

Added
12/28/95

SUPPORTING DOCUMENTS FOR ENGINEERING INVESTIGATIONS AT INACTIVE HAZARDOUS WASTE SITES

DRAFT

PRELIMINARY SITE ASSESSMENT

Michael Wolfer Site No. 905020

^{Village} City of Delevan Cattaraugus County

2/93



Prepared for:

New York State Department of Environmental Conservation

50 Wolf Road, Albany, New York 12233
Thomas C. Jorling, *Commissioner*

Division of Hazardous Waste Remediation
Michael J. O'Toole, Jr., *Director*

By:

DUNN GEOSCIENCE ENGINEERING COMPANY, P.C.

In association with

TAMS CONSULTANTS, INC.

SUPPORTING DOCUMENTS FOR
ENGINEERING INVESTIGATIONS AT
INACTIVE HAZARDOUS WASTE SITES
IN THE STATE OF NEW YORK

PRELIMINARY SITE ASSESSMENT
MICHAEL WOLFER SITE

NYS Site Number 905020
Town of Delevan
Cattaraugus County
New York State

Prepared for:

NEW YORK STATE
DEPARTMENT OF ENVIRONMENTAL CONSERVATION
Division of Hazardous Waste Remediation
50 Wolf Road
Albany, New York 12233-7010

Prepared by:

DUNN GEOSCIENCE ENGINEERING COMPANY, P.C.
12 Metro Park Road
Albany, New York 12205

In Association With:

TAMS CONSULTANTS, INC.
300 Broadacres Drive
Bloomfield, New Jersey 07003

Date:

February 1993

PRELIMINARY SITE ASSESSMENT REPORT

TABLE OF CONTENTS

	PAGE
1.0 INTRODUCTION	1
2.0 SITE ASSESSMENT	3
2.1 Site History	3
2.2 Site Topography	6
2.3 Geology	6
2.3.1 Physiography	6
2.3.2 Surficial Deposits	6
2.3.3 Bedrock	7
2.4 Hydrogeology	7
2.4.1 Groundwater	7
2.5 Proximity to Potential Receptors	8
2.5.1 Surface Water	8
2.5.2 Population	8
2.5.3 Agricultural Land	8
2.5.4 Commercial Land	8
3.0 TASK DISCUSSION	9
3.1 Task 1 - Data and Records Search	9
3.1.1 Previous Investigations	9
3.2 Task 2	9
3.2.1 Work Plan	9
3.2.2 Site Specific Documents	10
3.3 Task 3 - Non-Intrusive Investigations	10
3.3.1 Geophysical Survey	10
3.3.2 Soil Gas Survey	10
3.3.3 Initial Environmental Sampling	15
4.0 RESULTS OF INVESTIGATION	18
5.0 CONCLUSIONS	29
6.0 RECOMMENDATION	30

LIST OF FIGURES

Figure ES-1	Site Location Map
Figure ES-2	Site Features Map
Figure 1	Site Location Map
Figure 2	Site Features Map
Figure 3	Soil Gas Sample Location Map
Figure 4	Surficial Soil Sample Locations

LIST OF TABLES

Table 1	Soil Gas Library
Table 2	Soil Gas Results
Table 3	Analytical Results - Organics
Table 4	Analytical Results - Inorganics
Figure 5	Background Soil Elemental Concentrations

APPENDICES

Appendix

A	List of References
B	Documents Cited
C	Color Photographs
D	EPA 2070-13 Form
E	Proposed Updated NYS Registry Form

SUPPORTING DOCUMENTATION

SECTION

1	References
2	Documents Cited
3	Soil Gas Survey-Field G.C. Chromatograms
4	Data Validation Report

SECTION 1

REFERENCES

LIST OF REFERENCES

- A-1 Broughton, J.G., Fisher, D.W., Isachsen, Y.W. Rickard, L.V., 1976, Geology of New York State - A Short Account, Educational Leaflet 20. The University of the State of New York/The State Education Department, NYS Museum and Science Service, Albany, New York.
- A-2 Frimpter, M.H., 1974, Groundwater Resources, Allegheny River Basin and Part of the Lake Erie Basin, New York, New York State Department of Environmental Conservation, Albany, New York.
- A-3 Pearson, C.S., J.C. Bryant, and W. Secor, 1940, Soil Survey Cattaraugus County, New York, USDA Bureau of Plant Industry, Cornell University Agricultural Experiment Station, Ithaca, New York.
- A-4 Rickard and Fisher, 1988. Geologic Map of New York - Niagara Street.
- A-5 Rickard and Fisher, 1970. Geologic Map of New York - Niagara Street.
- A-6 Recra Environmental, Inc. November 1987, Preliminary Site Characterization, Boehmer Property Site, NYSDEC No. 905016.
- A-7 Lenz and Riecker, 1967, State of New York Official Compilation of Codes, Rules and Regulations, Title 6 NYCRR Conservation, published for the Department of State.
- A-8 Federal Emergency Management Agency (FEMA), Flood Insurance Rate Map, Town of Machias, New York, Cattaraugus County, Community Panel Number 360084-0010B, August 20, 1982.
- A-9 Ecology and Environment Engineering, P.C., August 1989, Phase I Investigation, Boehmer Property, Site Number 905016, Town of Machias, Cattaraugus County.

REFERENCE A-1

Geology of New York State

adapted from the text of
"Geologic Map of New York State"
by J. G. Broughton, D. W. Fisher,
Y. W. Isachsen, L. V. Rickard

REPRINTED 1976

EDUCATIONAL LEAFLET 20

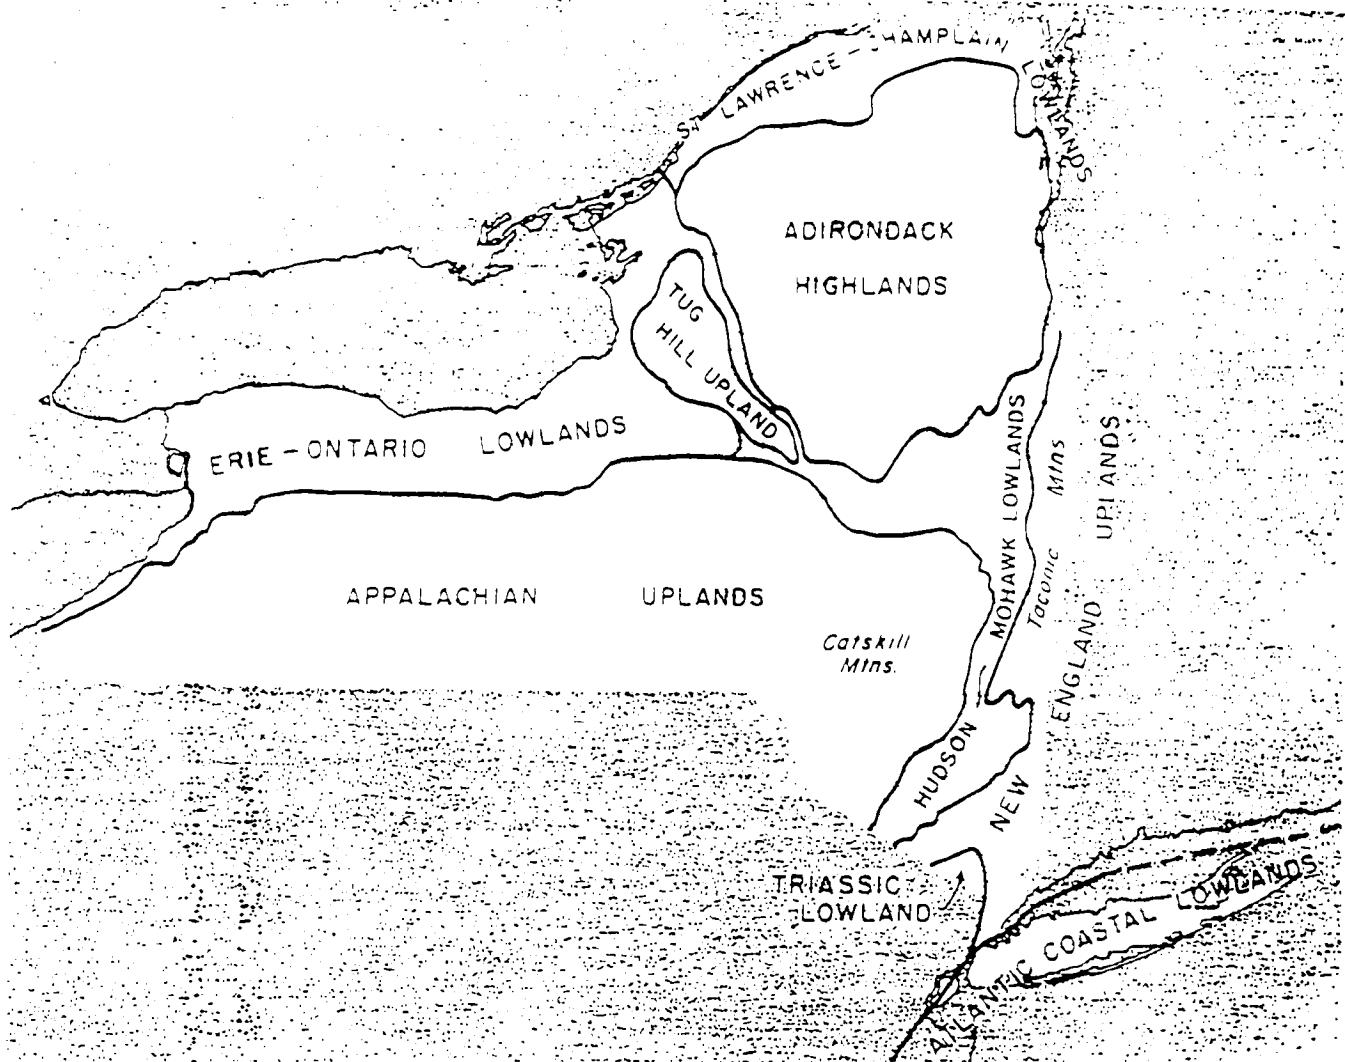


FIGURE 19. Physiographic provinces of New York, based on relief and geology (Modified after G. B. Cressey, 1952)

Cenozoic Era

PHYSIOGRAPHIC PROVINCES AND TERTIARY HISTORY

The physiographic provinces of New York are shown in figure 19. Modern landscapes of the State were shaped largely during the Cenozoic Era, the most recent 65 million years of geologic history. Although the overall features later would be modified and blurred by glaciation, the broad outlines of modern mountain, valley, and plain first were carved by the unremitting rush of water to the earlier Cenozoic seas.

The long sequence of erosion presumably began with the arching of the Jurassic Fall Zone erosion surface in

mid-Cretaceous time. As its eastern flank dipped beneath the encroaching Atlantic Ocean to receive Coastal Plain deposits, the axis domed sufficiently to initiate the sculpture of the Appalachians and Adirondacks. Few, if any of today's land forms can be traced so far back, however. Most researchers believe that all the exposed remnants of the dissected Fall Zone surface were obliterated by subsequent erosion.

South of New York, at least a partial record of Tertiary geology persists in the Coastal Plain deposits. In addition to a sedimentary record, datable igneous intrusions cut rocks of varying degrees of deformation in the western states. But in New York, no such tangible evidence of Cenozoic events exists. The Coastal Plains sediments derived from the long-continued degradation of New York and New England now rest on the Continental

REFERENCE A-2

✓ 5/14/74

Ground-Water Resources, Allegheny River Basin and Part of the Lake Erie Basin, New York

By
Michael H. Frimpter
U.S. Geological Survey



Allegheny River Basin
Regional Water Resources
Planning Board

ARB-2
1974

GROUND-WATER RESOURCES,
ALLEGHENY RIVER BASIN AND PART OF THE
LAKE ERIE BASIN, NEW YORK

Prepared for the
ALLEGHENY RIVER BASIN REGIONAL WATER RESOURCES
PLANNING BOARD

By

Michael H. Frimpter

UNITED STATES DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

in cooperation with
NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION

STATE OF NEW YORK
— DEPARTMENT OF ENVIRONMENTAL CONSERVATION

Basin Planning Report ARB-2
1974

INTRODUCTION

Abundant ground-water resources in the New York part of the Allegheny River basin are an asset to the development of southwestern New York. Much of the water used for municipal, industrial, and private supplies in this basin is obtained from wells and springs. The adjacent Lake Erie drainage basin in Chautauqua County is not as well endowed with ground water, and nearly all municipal and industrial supplies in this area depend on artificial surface-water reservoirs or on Lake Erie.

In the past, development of the area was concentrated in the major valleys where the land is most suitable for cultivation and construction and where ground water is most plentiful. Today cities and villages are expanding within the valley areas, and some are beginning to expand beyond the limits of the valleys. Suburbanization is occurring near some of the larger industrial centers such as Dunkirk, Jamestown, and Olean. Distribution and quality of the water will influence future population movement and industrial development in the area.

Irregular distribution of ground-water availability in the study area is an important feature of the resource. Nearly all the ground water available in quantities sufficient to sustain municipal and industrial water supplies is in the major valleys of the Allegheny River basin. In upland areas, only moderate to meager supplies of ground water are available for supply to individual homes or farms.

Problems with water quality are superimposed on the problem of geographical distribution of the water. Much of the small amount of available ground water underlying the Lake Erie Plain is too salty for most purposes. In this area, ground water from depths greater than about 50 feet is too salty for domestic use. This saltiness is due to connate water (water entrapped in the rock forming sediments when they were deposited in an ancient sea). Concentrations of iron and manganese in water from some aquifers is sufficiently high to require treatment before domestic use. Man's pollution of ground water with organic wastes and chemicals has also reduced the availability of good-quality water. Oil-field brine is a pollutant of ground water in and near active oil fields in the Allegheny River basin. Some of the aquifers with the largest potential yields in southwestern New York are particularly susceptible to pollution.

Water levels are declining in some aquifers because pumpage from them exceeds recharge. Declining water levels in the Jamestown aquifer caused concern about the adequacy of the Jamestown water supply. This concern led the city of Jamestown into a cooperative agreement with the U.S. Geological Survey to study the ground-water resources of the Jamestown area (Crain, 1966).

Purpose and Scope

The purpose of this report is to describe and evaluate geologic and hydrologic conditions controlling the ground-water resources of southwestern New York State as a guide for regional planning and management of the area's water resources. Specific attention was given to the determination of possible perennial yields of ground water from the major aquifers. Distribution of the aquifers, their estimated perennial yields, and estimated yields of wells tapping them are shown on maps; geohydrology of the major aquifers is described and illustrated.

The area studied includes the parts of Allegany, Cattaraugus, and Chautauqua Counties in the Allegheny River drainage basin and the part of the Lake Erie drainage within Chautauqua County, exclusive of Cattaraugus Creek basin (fig. 1). This area includes 2,200 square miles bounded by Cattaraugus and Genesee basins on the north and east, by Lake Erie on the northwest, and by the Commonwealth of Pennsylvania on the west and south. Major centers of population in the area are Dunkirk, Jamestown, Olean, and Salamanca.

Most of the area lies within the Appalachian Plateau physiographic province, except for a narrow 2- to 5-mile wide belt along the Lake Erie shore and in the Great Lake section of the Central Lowland east of the Mississippi physiographic province (Fenneman, 1938, pl. IV).

Hydrologic Data

Geologic mapping and collection of hydrologic information were done in 1967. Records of 452 wells and 5 springs are included in tables 4 and 5, respectively. Lithologic logs from 176 selected wells and test borings are shown in table 6, and chemical analyses of 73 representative samples of ground water are given in table 7.

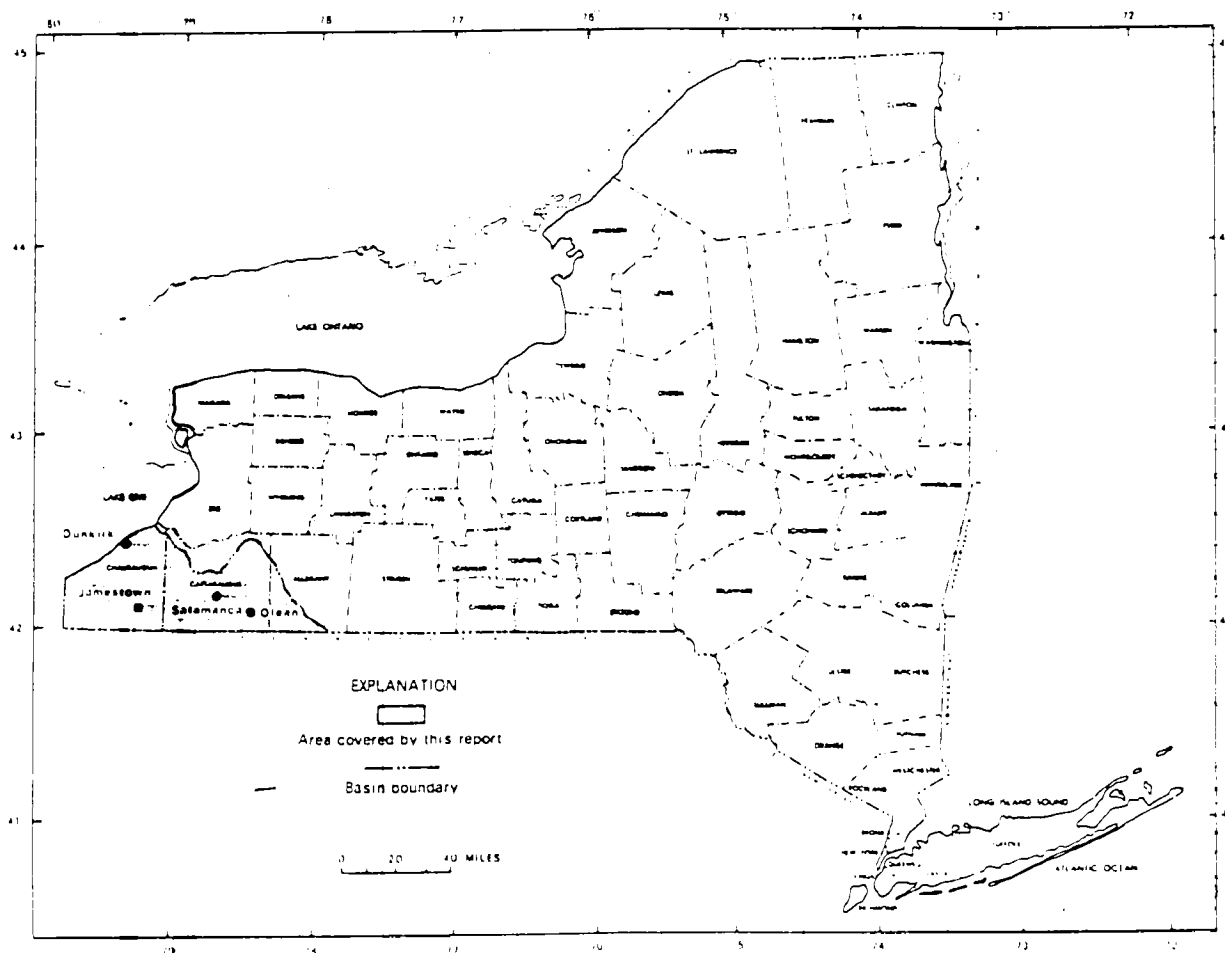


Figure 1.--Location of study area.

Numbering and Location System

Well, spring, and test-hole basic data used in the preparation of this report are identified by latitude, longitude, and a sequential number or letter. These identification numbers allow location of the well, spring, or test hole to within 1-second accuracy (about 100 feet in the study area) on U.S. Geological Survey 1:24,000 scale topographic maps (fig. 2). Further identification within a 1-second quadrangle is by a sequential number for wells and springs or a sequential letter for test holes. Identification number 420004N0781647.1, for example, locates well sequential number 1 in a 1-second quadrangle between latitudes 42°00'04" N. and 42°00'05" N. and between longitudes 78°16'47" W. and 78°16'48" W.

Previous Investigations

A report on the ground-water resources in the area around Jamestown (Crain, 1966) deals principally with hydrology and perennial yield of the Jamestown aquifer. Very little new information pertaining to ground water in the Jamestown area has become available since the publication of Crain's report, and no attempt was made to supply additional estimates of ground-water availability for that area.

A description of the ground water in the Allegany State Park (Thwaites, 1932) provides historical information on the quality of ground water and construction of wells and springs in the park area.

Acknowledgments

This report was prepared in cooperation with the New York State Department of Environmental Conservation, for the Allegheny River Basin Regional Water Resources Planning Board. U.S. Geological Survey studies of surface-water resources and quality of surface water were made concurrently with this study under the same cooperative agreement. Well records from previous U.S. Geological Survey inventories of ground-water supplies were particularly valuable to the study.

The investigation was made under the direct supervision of Albert M. LaSala, Jr., former Chief, Areal Studies Section, and under the general supervision of Gerald G. Parker, former District Chief, U.S. Geological Survey, Albany, New York. Ronald R. Shields prepared the part of this report pertaining to ground water as part of the hydrologic cycle. Lynn E. Johnson and Richard E. Krause collected well data and ground-water samples for the project during 1967, and Willard S. Winslow, Jr., collected many useful well records during the mid-1940's.

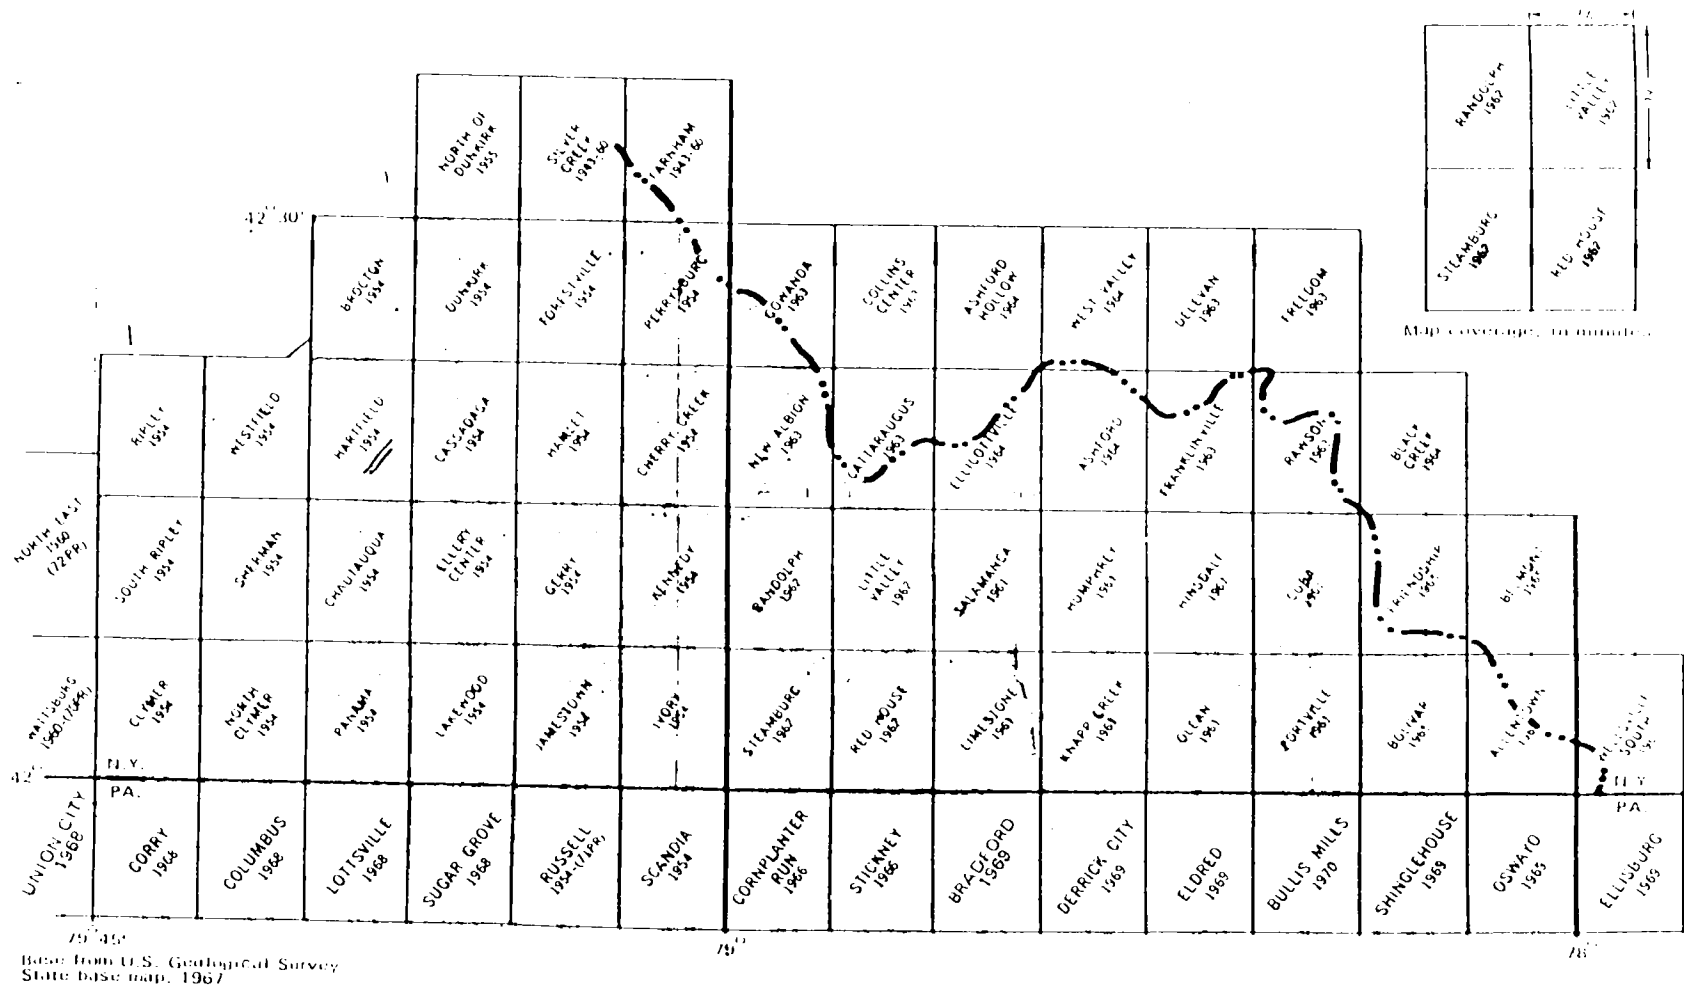


Figure 2.--Index to U.S. Geological Survey topographic maps, as of October 1972, covering the Allegheny River basin, New York.


Locations (latitude-longitude) in this report can be plotted on appropriate U.S. Geological Survey topographic maps. These maps are currently priced at \$.75 a copy. They may be ordered from the Branch of Distribution, U.S. Geological Survey, 1200 South Eads Street, Arlington, Virginia 22202.

GEOLOGIC SETTING

Bedrock at and near the land surface in the study area is of Devonian age and consists predominantly of gray and black shale with interbedded layers of gray siltstone and sandstone (fig. 3). These rocks were deposited in a shallow sea about 350 million years ago. Layers of shale, siltstone, and sandstone dip very gently to the south, and rock layers that crop out in the northern part of the area are at great depth near the New York-Pennsylvania boundary to the south. For example, the Bradford First sand (sandstone), which is penetrated by oil wells at a depth of about 1,200 feet at Knapp Creek, is equivalent to a layer that crops out near Cuba, 18 miles to the north-northeast. Oil seepage to the surface from this layer, near Cuba, forms the famous Seneca Indian Oil Spring.



Figure 3.--Eastward view of gently dipping shale and sandstone bedrock near Irvine Mills.

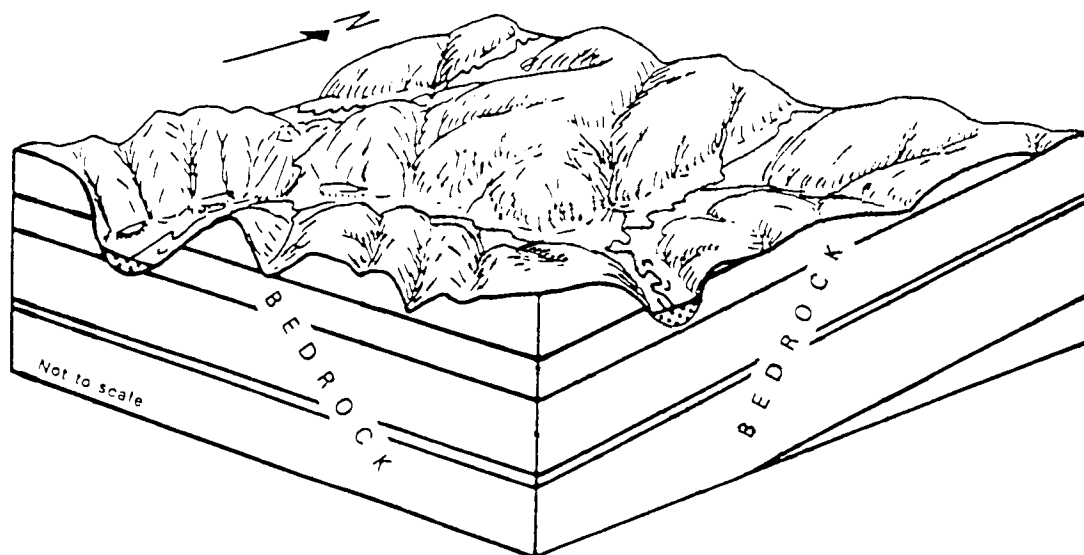

EXPLANATION



Thick unconsolidated deposits

Figure 4.--Mature dissected Allegheny Plateau.

Most of the area is a dissected plateau in a mature stage of development as indicated by the sharp divides between valleys (fig. 4). The plateau ends in an irregular escarpment at the Lake Erie Plain, a few miles southeast of Lake Erie. The Lake Erie Plain is a narrow belt of nearly flat land, sloping gently from the base of the escarpment, about 800 feet above sea level, to the lake shore, about 570 feet above sea level. Nearly all the rocks exposed at land surface in the study area are of Devonian age, but small areas of rocks of Mississippian and Pennsylvanian age are exposed on the hilltops near the New York-Pennsylvania State line at altitudes of about 2,300 feet. Detailed descriptions of the bedrock geology in the study area have been made by Lobeck (1927) and Tesmer (1963), and the locations of the geologic formations are shown on the geologic map of New York State (Broughton and others, 1962).

A mantle of unconsolidated deposits covers nearly all the bedrock in the area (fig. 5). In most localities, the mantle is thin on hilltops and hillsides and is thickest in the larger valleys. Most of the available, good-quality ground water is in thick, unconsolidated deposits in the valleys.

Most of the study area was covered at least twice by continental glaciers during the Pleistocene Epoch (between about 1 million and 10 thousand years ago). The glaciers moved from Canada southward across the area. Rock fragments embedded in the ice abraded the bedrock, and additional rock fragments and soils became incorporated in the ice sheets. Hilltops were rounded, and valleys parallel to the direction of ice movement were deepened by glacial erosion.

Before the advance of the glaciers, the topography of the area was probably similar to that in Allegany State Park, south of Salamanca. The south-central part of the study area near Salamanca, in which the park lies, is the only part of New York State that was not glaciated (MacClintock and Apfel, 1944). There is little flat land in this nonglaciated area, and all its streams are in deep V-shaped valleys separated by sharp ridges.

As the glaciers melted from the area, morainal ridges were formed at edges of the ice by the deposition of soil and rock fragments where ice fronts were stationary. Some moraines may have been pushed short distances from their original sites by minor readvances of the ice fronts.

Glaciation is responsible for derangement of the surface drainage system of the area. Most of the preglacial drainage channels were dammed by glacial ice or moraines. Such damming caused lakes to form in some places and diverted some streams to new channels. Before glaciation, most of the streams in the area drained toward the north; however, areal drainage has been southward since Pleistocene time. Examples of drainage disruptions (stream piracy) are given in the remainder of this section.


Prior to glaciation two branches of the ancestral Allegheny River met at the site of the abandoned hamlet of Cold Spring and flowed northwest through Little Conewango Creek valley, the upper part of Conewango Creek valley, past the present locations of Dayton and Gowanda (fig. 5), and northward to Lake Erie. A moraine deposited in the ancestral Allegheny River valley between Randolph and Cold Spring formed a dam between Conewango Creek and the present Allegheny River (fig. 6). This moraine blocked drainage and dammed the Allegheny River to form a deep sinuous lake that spilled over a divide at Kinzua in Pennsylvania into a tributary of the Ohio River. A gap that the stream rapidly cut in the soft bedrock at Kinzua allowed the lake to drain completely. Consequently, the upper Allegheny River is now part of the Ohio River drainage system.


As the glacial ice receded to the Allegheny Plateau escarpment, large fingerlike lakes formed in the present valleys of Conewango Creek, Cassadaga Creek, and Chautauqua Lake. The moraine near Randolph prevented these lakes from draining southward into the Allegheny River, whereas the glacial ice itself prevented northward drainage. Because great amounts of silt and clay were deposited in the lakes, today the Cassadaga and Conewango Creek valleys are land; and more than half of Chautauqua Lake is less than 20 feet deep.


Ancestral Beaver Meadows Creek, Ischua Creek, and Oil Creek drained to the north; but their valleys were also dammed by glacial ice. The ice front remained at the north ends of these valleys long enough to build sizeable moraines that presently form drainage divides at Mayville, Cassadaga, Dayton, Lime Lake, Rawson, and at other, less prominent locations. The ice blocked drainage to the north, and lakes were formed. Because the melting glacier produced more water than the valleys could hold, the lakes spilled over divides to the south into tributaries of the Allegheny River and eventually drained in a manner similar to that of the Allegheny River. At Lime Lake, sediment-laden melt water discharged from the glacier into Ischua Creek valley and deposited beds of nearly horizontally layered sand and gravel. These beds were partly removed by erosion when the lake drained to the south.


EXPLANATION
SURFICIAL DEPOSITS


Sand or interbedded sand and gravel


Silt, clay, or silt and clay


Till mixed with sand and gravel,
and silt and clay. These deposits
were usually formed as glacial
moraines.


Glacial till or bedrock


Areas that have not been glaciated
and whose surficial deposits have
been derived from weathering of the
underlying bedrock.

Contact

Southern limit of Wisconsin glaciation

Basin boundary

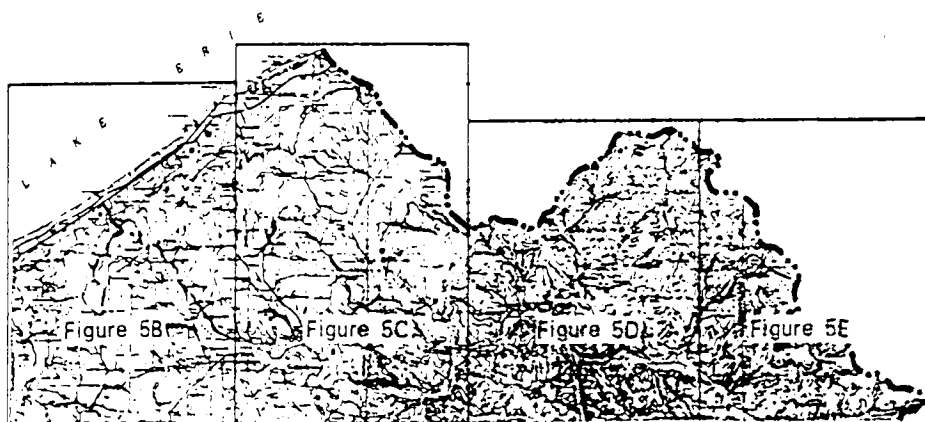


Figure 5A.--Surficial geology, Allegheny River basin, New York.
(Geology for Chautauqua County adapted from
E. H. Muller, 1963. Geology for remainder
of basin by M. H. Frimpter, 1967.)


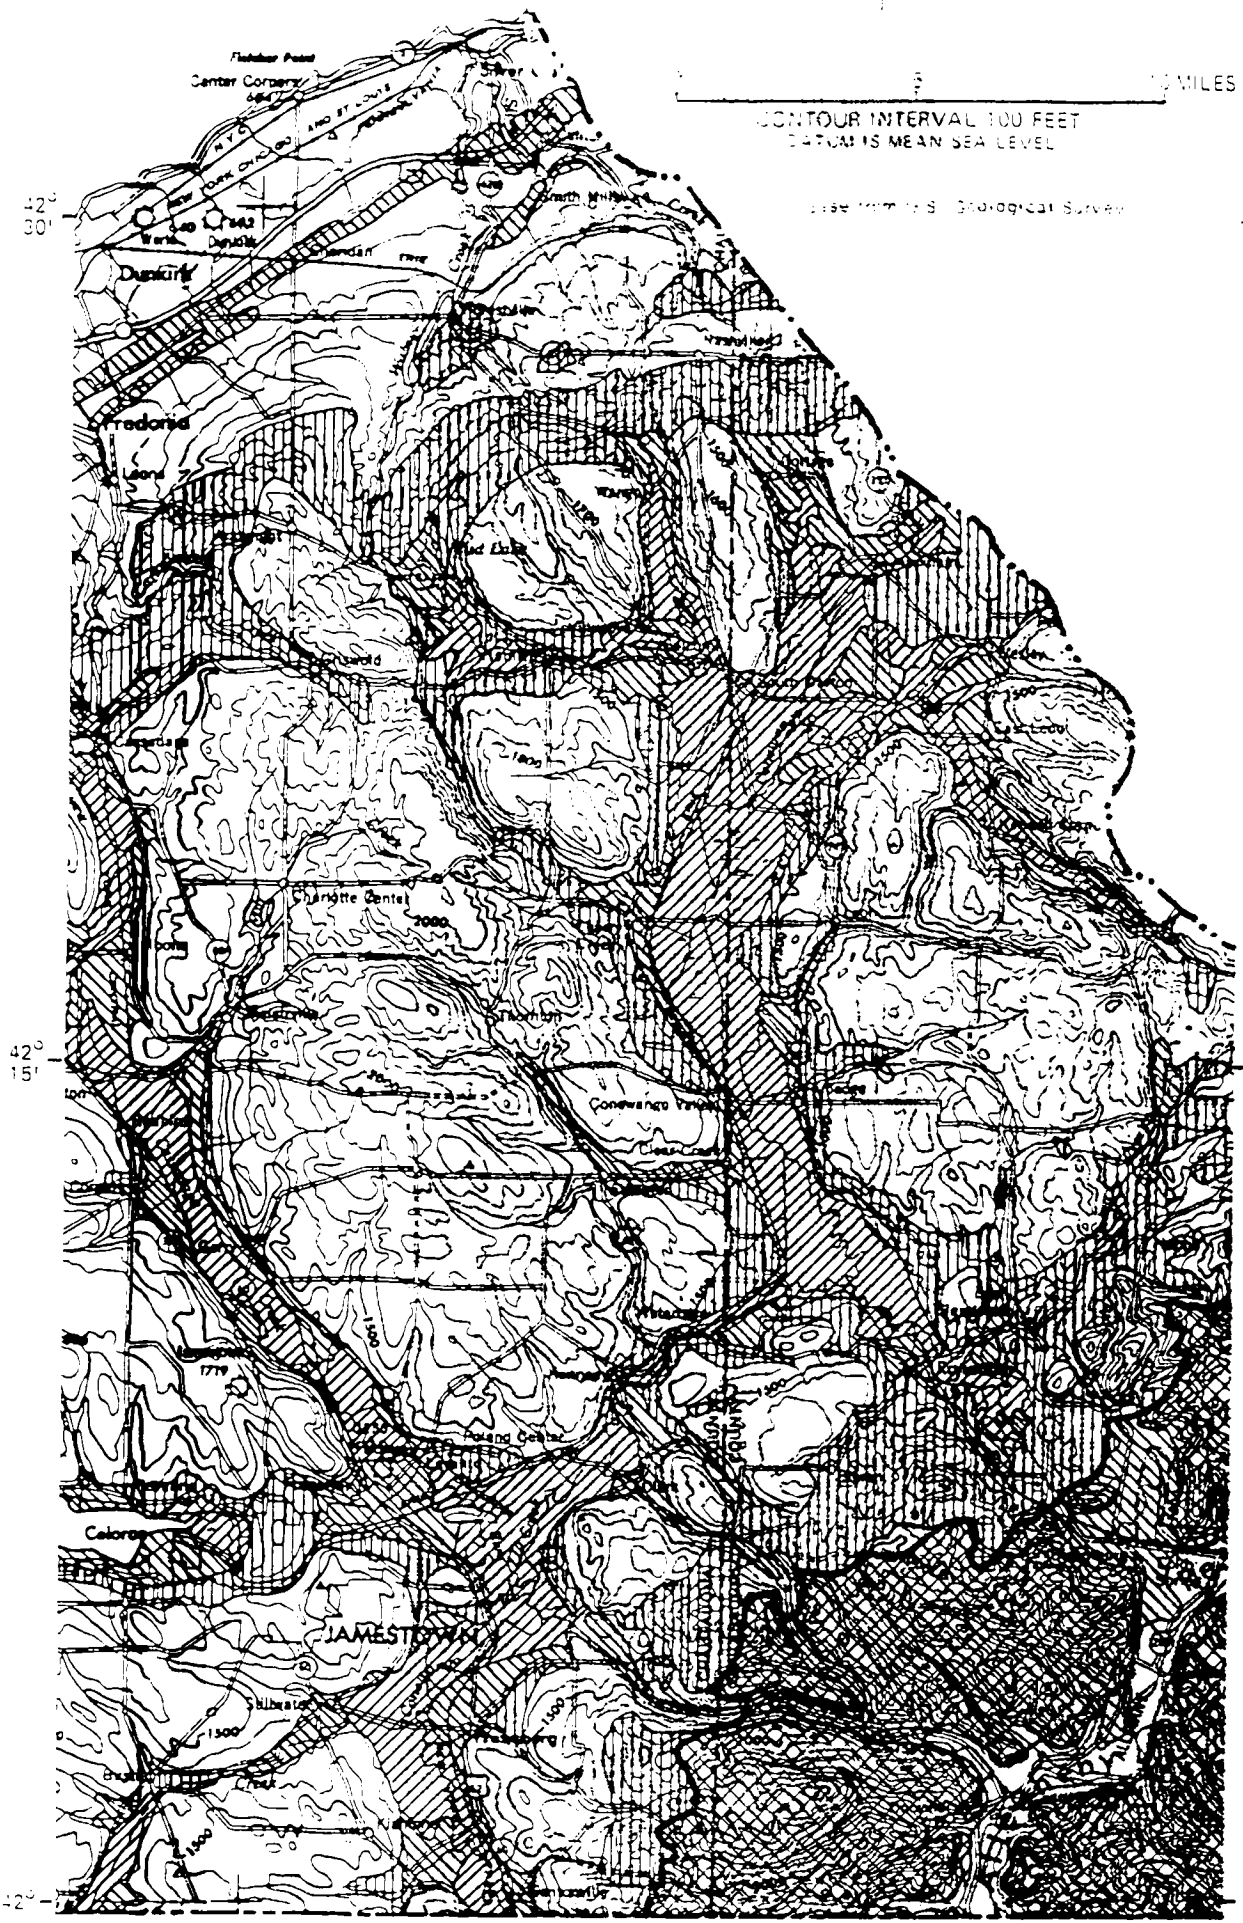


Figure 50.--Surficial geology, Allegheny River basin, New York
 (western-central part).

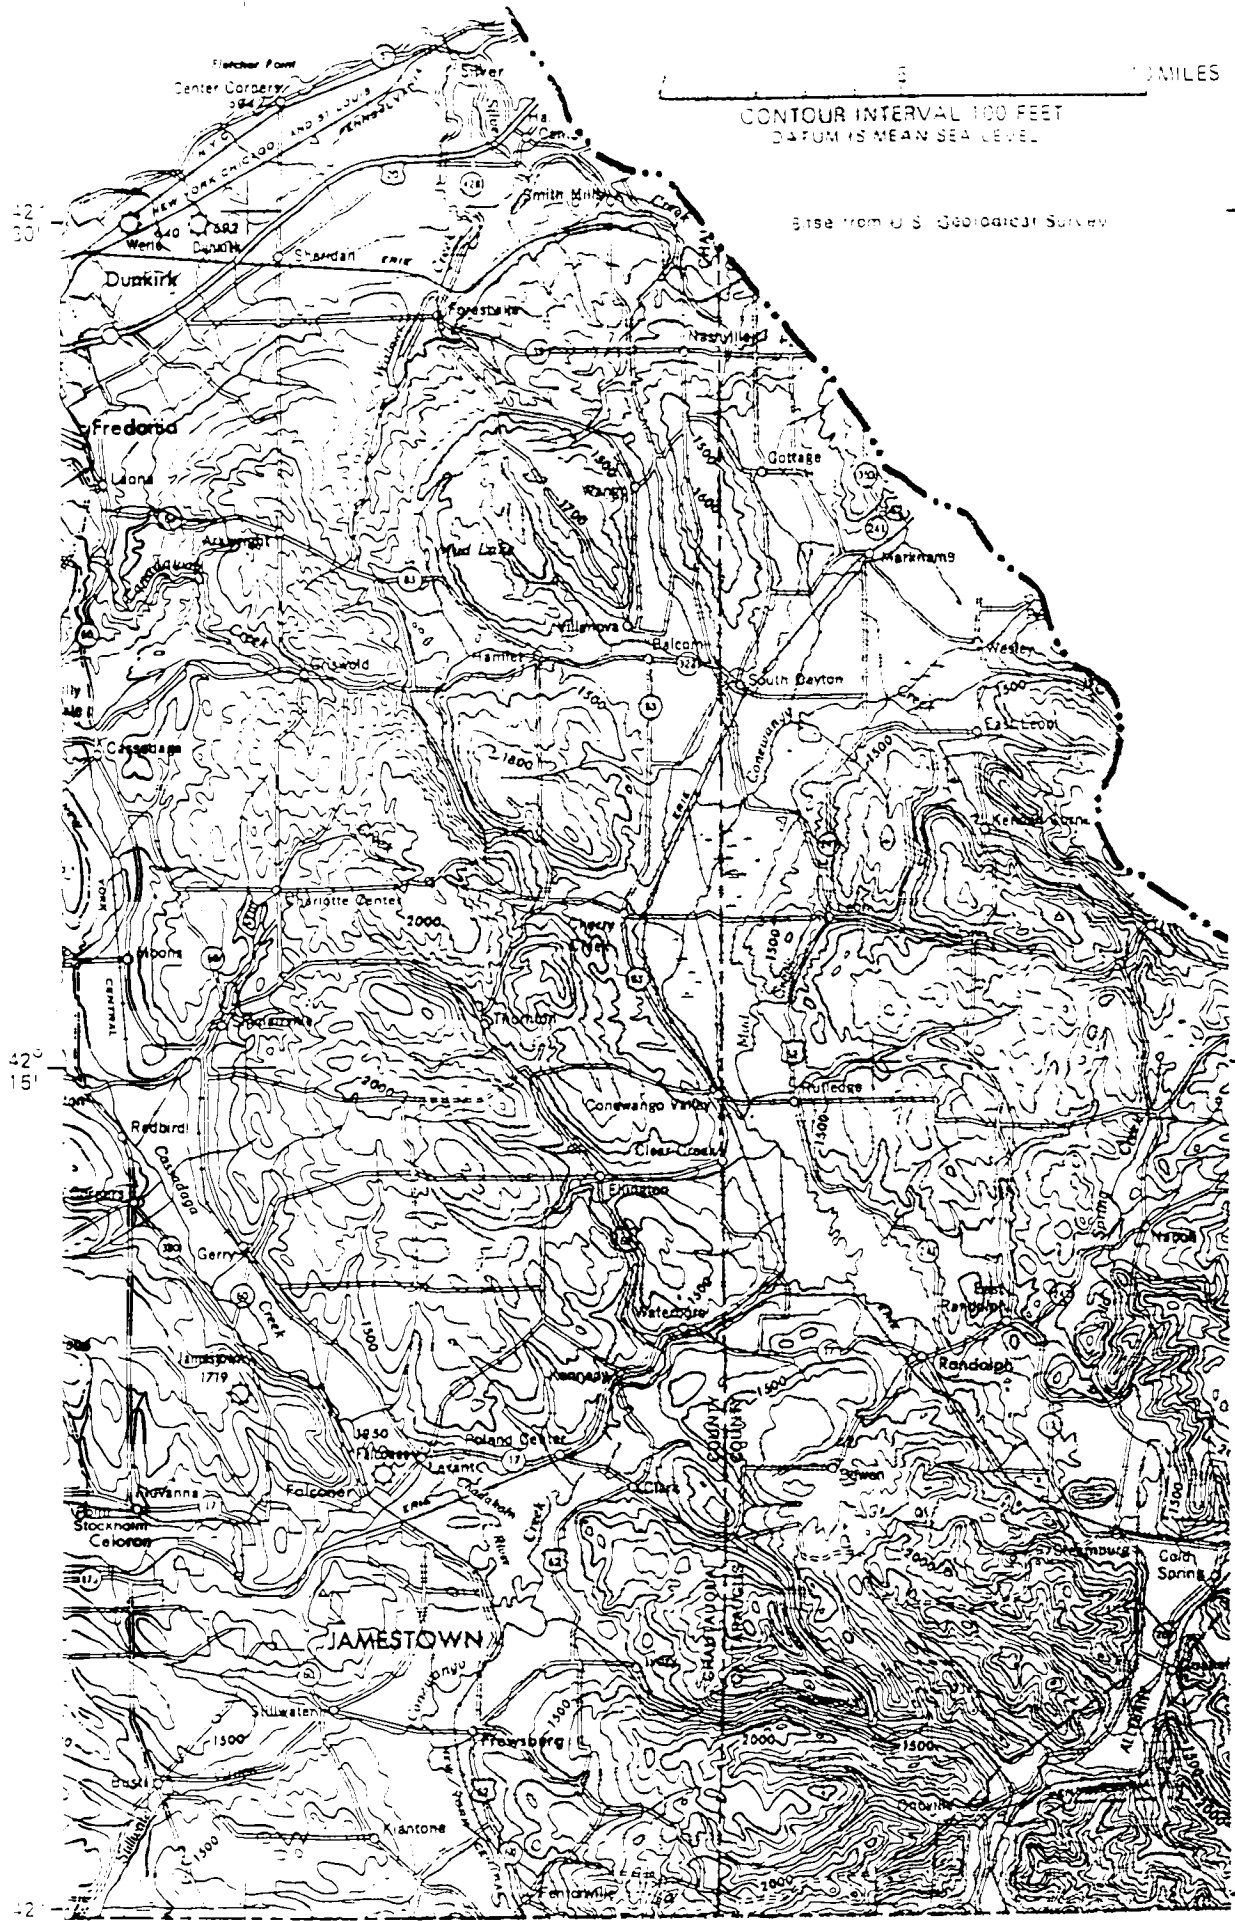

CONTOUR INTERVAL 100 FEET
 DATUM IS MEAN SEA LEVEL

Base from U. S. Geological Survey

42° 30'

42° 15'

42°

79° 15'

BASE MAP FOR FIGURE 5C

79° 00'

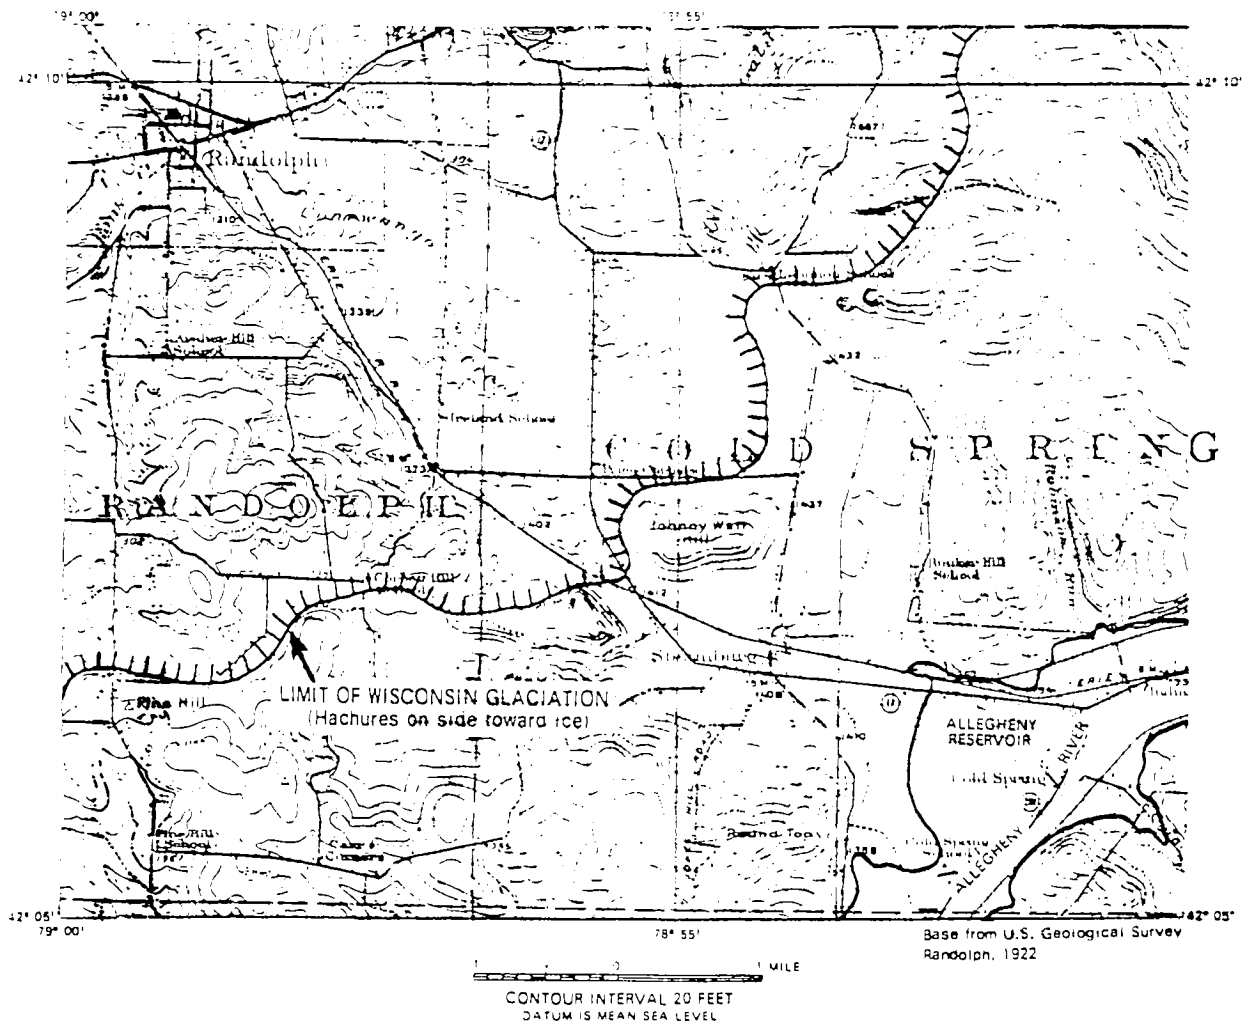


Figure 6.--Location of moraine blocking ancestral Allegheny River valley.

GROUND WATER AS PART OF THE HYDROLOGIC CYCLE

Ground water in the area is derived from precipitation. There are three paths by which water from precipitation may leave the area: (1) over the land surface, (2) through the ground, and (3) back to the atmosphere through evapotranspiration. In the first path, precipitation runs off the land surface directly into streams. In the second path, it infiltrates the soil where some of the water is temporarily retained as soil moisture and the rest percolates downward, through the zone of aeration, to the water table (upper limit of the zone of saturation). Then as ground water, it moves laterally to discharge into lakes and streams. The third path is evapotranspiration from vegetation and land and water surfaces. The pattern of subsurface water circulation is shown in figure 7.

Estimates of the average annual water budget for the study area can be made with the equation $P = R + L + Sg$ (1)

where P = precipitation on the area
 R = runoff from the area
 L = water loss by evapotranspiration from the area
 Sg = change in ground-water storage

Assuming that the change in ground-water storage is negligible in comparison to total inflow and outflow for the 30-year period (1931-60),

$Sg = 0$, and equation (1) may be simplified to:

$$P = R + L \quad (2)$$

Average annual precipitation for this period in the Allegheny River basin is 41 inches, and runoff is 22 inches. By substituting these data in equation (2), one can calculate that the estimate of average annual evapotranspiration in the Allegheny River basin is 19 inches.

The ground-water budget for an area can be developed by determining how much of the water is circulated through the ground-water system, using the following equation:

$$Pg = Rg + ETg + U \quad (3)$$

where Pg = ground-water recharge
 Rg = ground-water discharge to streams
 ETg = ground-water evapotranspiration
 U = Subsurface outflow or inflow

Under natural conditions, aquifers of the study area are recharged by either direct infiltration from precipitation or leakage from streams that cross the aquifers. The natural rate of recharge is controlled primarily by the vertical permeability of the materials between land surface and the aquifers and also by the capacity of the aquifers to transmit water laterally away from the intake areas.

Using the general procedures outlined in a water-budget study by Rasmussen and Andreasen (1959, p. 93-97), the average annual ground-water

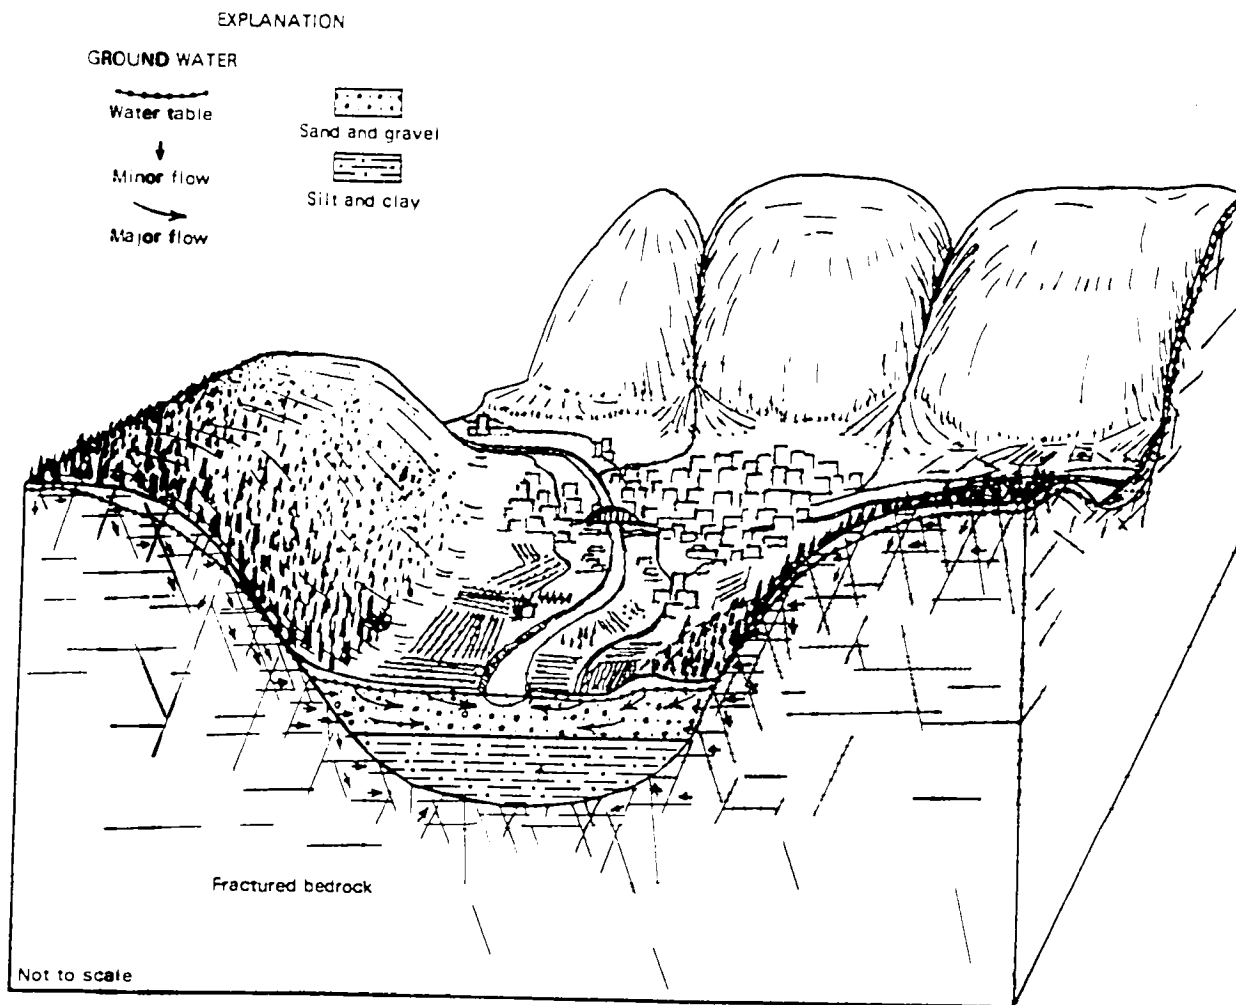


Figure 7.--Westward view of ground-water circulation near Olean.

recharge for the Allegheny basin, New York, from 1950 to 1964 was estimated to be 0.6 mgd (million gallon per day) per square mile. Ground-water discharge (R_g) was estimated to be 9.3 inches by separation of streamflow hydrographs into ground-water and streamflow components in the manner described by Meinzer and Stearns (1929, p. 107-113). By comparing ground-water runoff for various ground-water stages during both the growing season and the nongrowing season, a method described by Schicht and Walton (1961), the evapotranspiration of ground water (ET_g) was estimated to be 3.3 inches. Underflow is assumed small enough to be considered negligible. The recharge estimate was determined by use of equation (3) as follows:

$$\begin{aligned}
 P_g &= R_g + ET_g \\
 P_g &= 9.3 \text{ inches} + 3.3 \text{ inches} \\
 P_g &= 12.6 \text{ inches (0.6 mgd per sq mi)}
 \end{aligned}$$

The estimated ground-water recharge amounts to approximately 30 percent of the average annual precipitation.

Because of the absence of significant aquifers and the lack of detailed runoff data for the Lake Erie basin, a water budget for that basin was not

prepared. Considering the general absence of permeable geologic formations on the Lake Erie Plain, ground-water recharge there is probably substantially less than the 12 to 13 inches estimated for the Allegheny River basin.

Figures developed in water-budget studies are based on a period of years, and individual years may vary considerably from the average. Furthermore, ground-water recharge takes place only when precipitation exceeds evapotranspiration and soil-moisture requirements and when the ground is not frozen. Consequently, the figures are broad approximations.

Hydrographs of water levels from observation wells are useful to illustrate the natural patterns of ground-water recharge and subsequent ground-water discharge. A 19-year hydrograph of a well in a water-table aquifer near Panama demonstrates seasonal fluctuations of water levels (fig. 8). A rising water table shows recharge to be greater than discharge during the non-growing season, from November to April. From April through October (growing season) aquifer discharge exceeds aquifer recharge because most of the precipitation reaching the land surface is returned to the atmosphere through evapotranspiration.

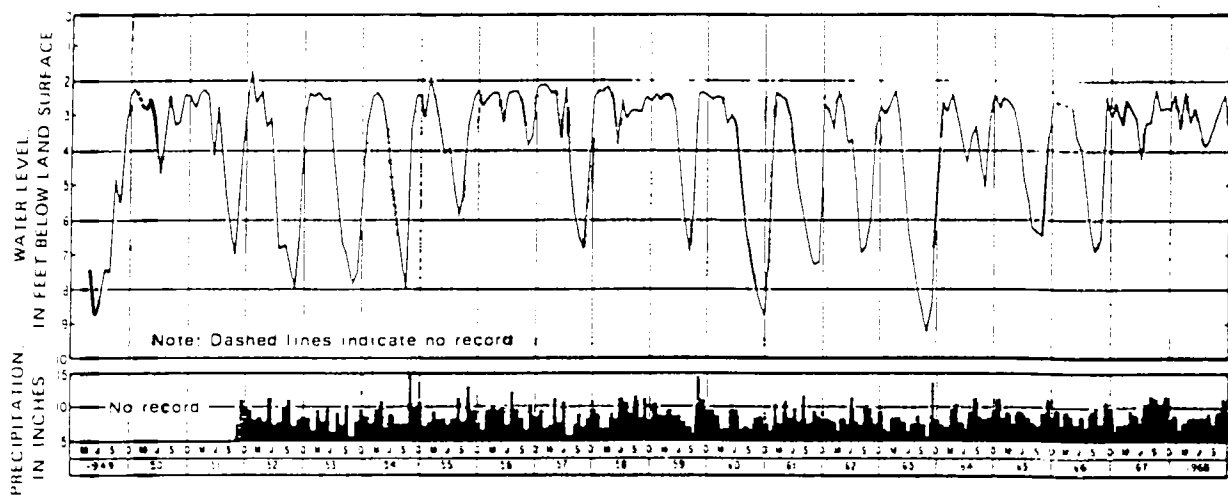


Figure 8.--Seasonal water-level fluctuations near Panama and monthly precipitation at Sherman.

OCCURRENCE OF GROUND WATER IN BEDROCK

Drilled wells tapping shale, siltstone, and sandstone (consolidated sediments) in most of the study area generally yield adequate quantities of good-quality ground water to supply rural homes. Only on the Lake Erie Plain and in the deep bedrock valleys of the plateau is the ground water too mineralized for domestic use. Objectionable concentrations of sodium, chloride, natural gas, and petroleum are carried by ground water in these areas. Shallow bedrock wells (less than about 50-feet deep) on the Lake Erie Plain may yield enough water of satisfactory quality to supply a home, but wells deeper than 50 feet usually yield salt water.

Regional ground-water circulation from the Allegheny Plateau area to the lower Lake Erie Plain is considered to be negligible. A significant circulation would have flushed the petroleum and the brine from the system in the past.

Ground water occurs in the pores of a rock; these pores may be classified as primary or secondary in origin. Primary porosity is developed at the same time the rock is formed. The primary pores in the rocks of the area studied are the void spaces between the grains of the sediment and are analogous to the spaces between marbles in a bag. Secondary porosity develops after the rock solidifies as cracks or fractures called joints.

The average primary porosity of the Bradford Third sand (the principal oil-bearing sandstone in the area) is about 14.5 percent, and its average permeability is a little less than 0.1 gallon per day per square foot (Fettke, 1938, p. 226). The low primary porosity and resultant low permeability of the consolidated rock in the study area as exemplified by the oil-bearing sandstone precludes the possibility of tapping consolidated rocks for large quantities of water.

Ground water obtained in usable quantities from the consolidated rocks occurs in the fractures or joints (secondary porosity). The more fractured and jointed the rock, the more open space it has to contain and transmit water. Horizontal or bedding-plane joints are very common in the study area, but they usually are tightly closed owing to the weight of the overlying rocks. However, at shallow depths or below competent beds of sandstone, these joints may be open and may carry water. Figure 3 is a photograph of an open bedding-plane joint from which water seeps and nourishes vinelike vegetation (above the automobile).

Wells in bedrock usually obtain most of their water directly from the horizontal joints because they intersect more horizontal than vertical joints. Horizontal joints in road cuts and other excavations seem to carry water, whereas the vertical joints seem to be dry because they are drained at the face of the excavation. (See figure 9.)

Although not as numerous as horizontal joints, steep-angle or vertical joints are very important in the area. These joints are more apt to remain open, even in less competent material such as shale, and to greater depths than the horizontal joints. Most importantly, the vertical joints act as conduits carrying recharge water from the surface down to the horizontal joints and form a three-dimensional network with the horizontal joints to transmit and store water below the water table.

Joint systems in the vicinity of Allegheny State Park were recognized and described by Lobeck (1927, p. 93-96). He reported the parallelism of the vertical joints and the stream-valley orientation due to the adjustment of the streams to the zones of least resistance to erosion (the joints). Wells tapping consolidated aquifers in these valleys generally yield more water than those on hills. This is partly due to the greater number of joints in the valleys.

Also, wells tapping bedrock usually yield more water in valleys than on hills because the water table is nearer land surface in the valleys than it is on the hills and wells of equal length penetrate more water-saturated, jointed rock in the valleys. Furthermore, many streams in the valleys are sources of recharge; in most localities no recharge from streams occurs on the hills. Ground-water levels vary only a few feet throughout the year in valley bottoms, whereas water-level fluctuations in the hills may vary as much as a few tens of feet.

The average depth of 98 wells reported to tap bedrock for domestic supplies is 96 feet (table 4). Yields reported for 34 of these wells average 12 gpm (gallons per minute). The average depth of 28 wells drilled in bedrock for municipal, industrial, commercial, and other uses is 146 feet (table 4), and their average yield is 54 gpm. The difference in yield between these two groups of wells is not solely dependent on their differences in depth. The wells drilled for high yield are located more carefully than those drilled for domestic supplies, and they differ in construction and development.

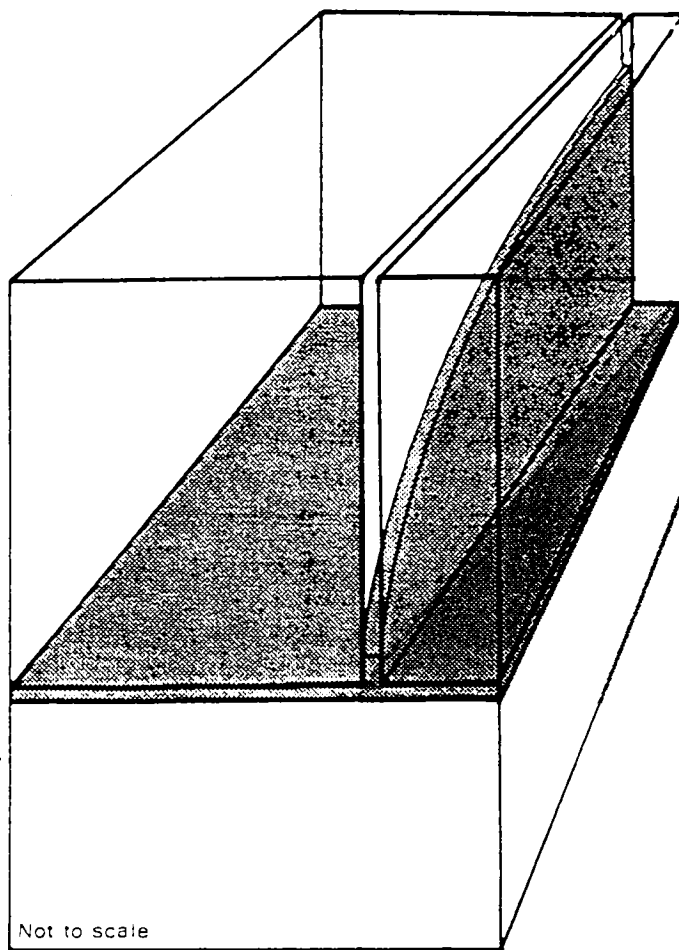


Figure 9.--Ground water (shaded area) in horizontal and vertical joints in bedrock.

OCCURRENCE OF GROUND WATER IN UNCONSOLIDATED AQUIFERS

Unconsolidated sediments comprise both the best and the poorest of the aquifers in southwestern New York (fig. 10). Coarse sand and gravel deposits are highly permeable and are capable of high yields. Compared to these deposits, clay is relatively impermeable and yields insignificant amounts of water to wells.

Most of the unconsolidated sediments were deposited during the last period of glaciation. Vast amounts of water and rock fragments were discharged from the melting glacier, and low-lying areas were flooded and were laden with sediments ranging in texture from clay to coarse gravel. In upland areas, most of the glacially derived sediments are deposits of till. Till is composed of unsorted clay, silt, sand, gravel, cobbles, and boulders in random mixtures. Conditions for deposition of till, outwash deposits, and lacustrine clay and silt coexisted at the edges of static-ice fronts, where moraines composed of mixtures of these materials were deposited. These moraines in the study area are mapped as "mixed deposits" (fig. 5).

Residual deposits formed from weathered bedrock in the nonglaciated part of the study area are similar to till in composition and hydrologic properties. Stream-laid deposits of sand and gravel occur in valleys in this area and are hydrologically comparable to outwash.

Thick, saturated, deposits of sand and gravel outwash in valleys (figs. 5 and 10) comprise the most productive aquifers in the study area. These deposits generally contain little interstitial clay and silt, and they are the most permeable of the water-yielding units in the area. The recharge potential of outwash deposits is the highest of all aquifers in the area because of their positions in valley bottoms. Outwash deposits are usually the most reliable aquifers because of their higher permeability and greater recharge potential. Yields of more than 1,500 gpm have been obtained in the study area from properly constructed wells screened in outwash. Stream-laid deposits of sand and gravel in the nonglaciated area derived from local rocks are similar to outwash, but they are mostly of small areal extent.

Deposits of till are usually of low permeability, and they do not yield large quantities of water. However, these deposits can usually supply individual homes and small farms from large-diameter (3 or more feet) wells. Such wells are usually shallow and frequently become dry in periods of drought; furthermore, they are easily polluted.


Many of the moraine deposits lie above the water table, especially where the deposits were left as ridges and hummocks. Where these deposits lie below the water table, intercalated sand and gravel lenses are capable of yielding small to moderate amounts of water. Yields from the moraines are variable, but in many localities, depending on the composition and the location of the saturated morainal material, they are capable of supplying individual homes and small farms from small-diameter driven wells or large-diameter dug wells.

Lake deposits of clay and silt in the area have low permeability and are not considered as aquifers. Clay and silt deposits may confine water under artesian pressure in underlying aquifers.

EXPLANATION

Estimated yield to individual wells tapping the most productive aquifer underlying each area. Yields are based on permeability, thickness, topographic position, and reported yields of existing wells. Several areas have more than one aquifer, but only the yield of the most productive one is indicated.

YIELD, IN GALLONS PER MINUTE



0.1 to 20

These aquifers consist of glacial till, bedrock, and very small deposits of sand and gravel. Open-hole drilled wells are constructed in the bedrock. Large-diameter open-jointed field stone wells are constructed in the glacial till and shallow sand and gravel deposits. Well points are also used to tap the small sand and gravel deposits.



5 to 50

Sand and gravel aquifers of slight thickness, including moraines, both water table and artesian. These are tapped by fully penetrating screened wells, generally 6 inches or less in diameter.



25 to 250

Sand and gravel aquifers, either water table or artesian. These deposits are tapped by fully penetrating screened wells generally 12 inches or less in diameter.



250 to more than 1000

Very permeable sand and gravel aquifers, either water table or artesian. Thickness of the water-table aquifers is generally more than 20 feet and of the artesian aquifers is generally less than 20 feet. These are tapped by fully penetrating screened wells, generally 10 inches or more in diameter.

— — — — —
Area boundary

- - - - -
Basin boundary

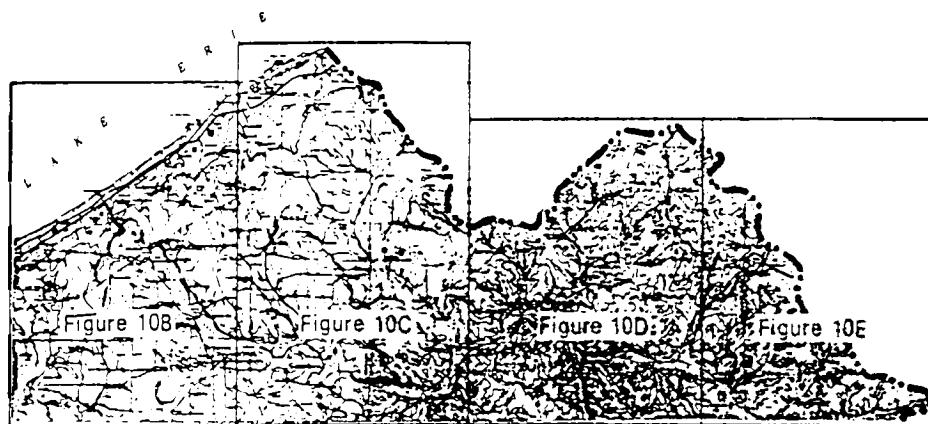


Figure 10A.--Ground-water availability, Allegheny River basin, New York.

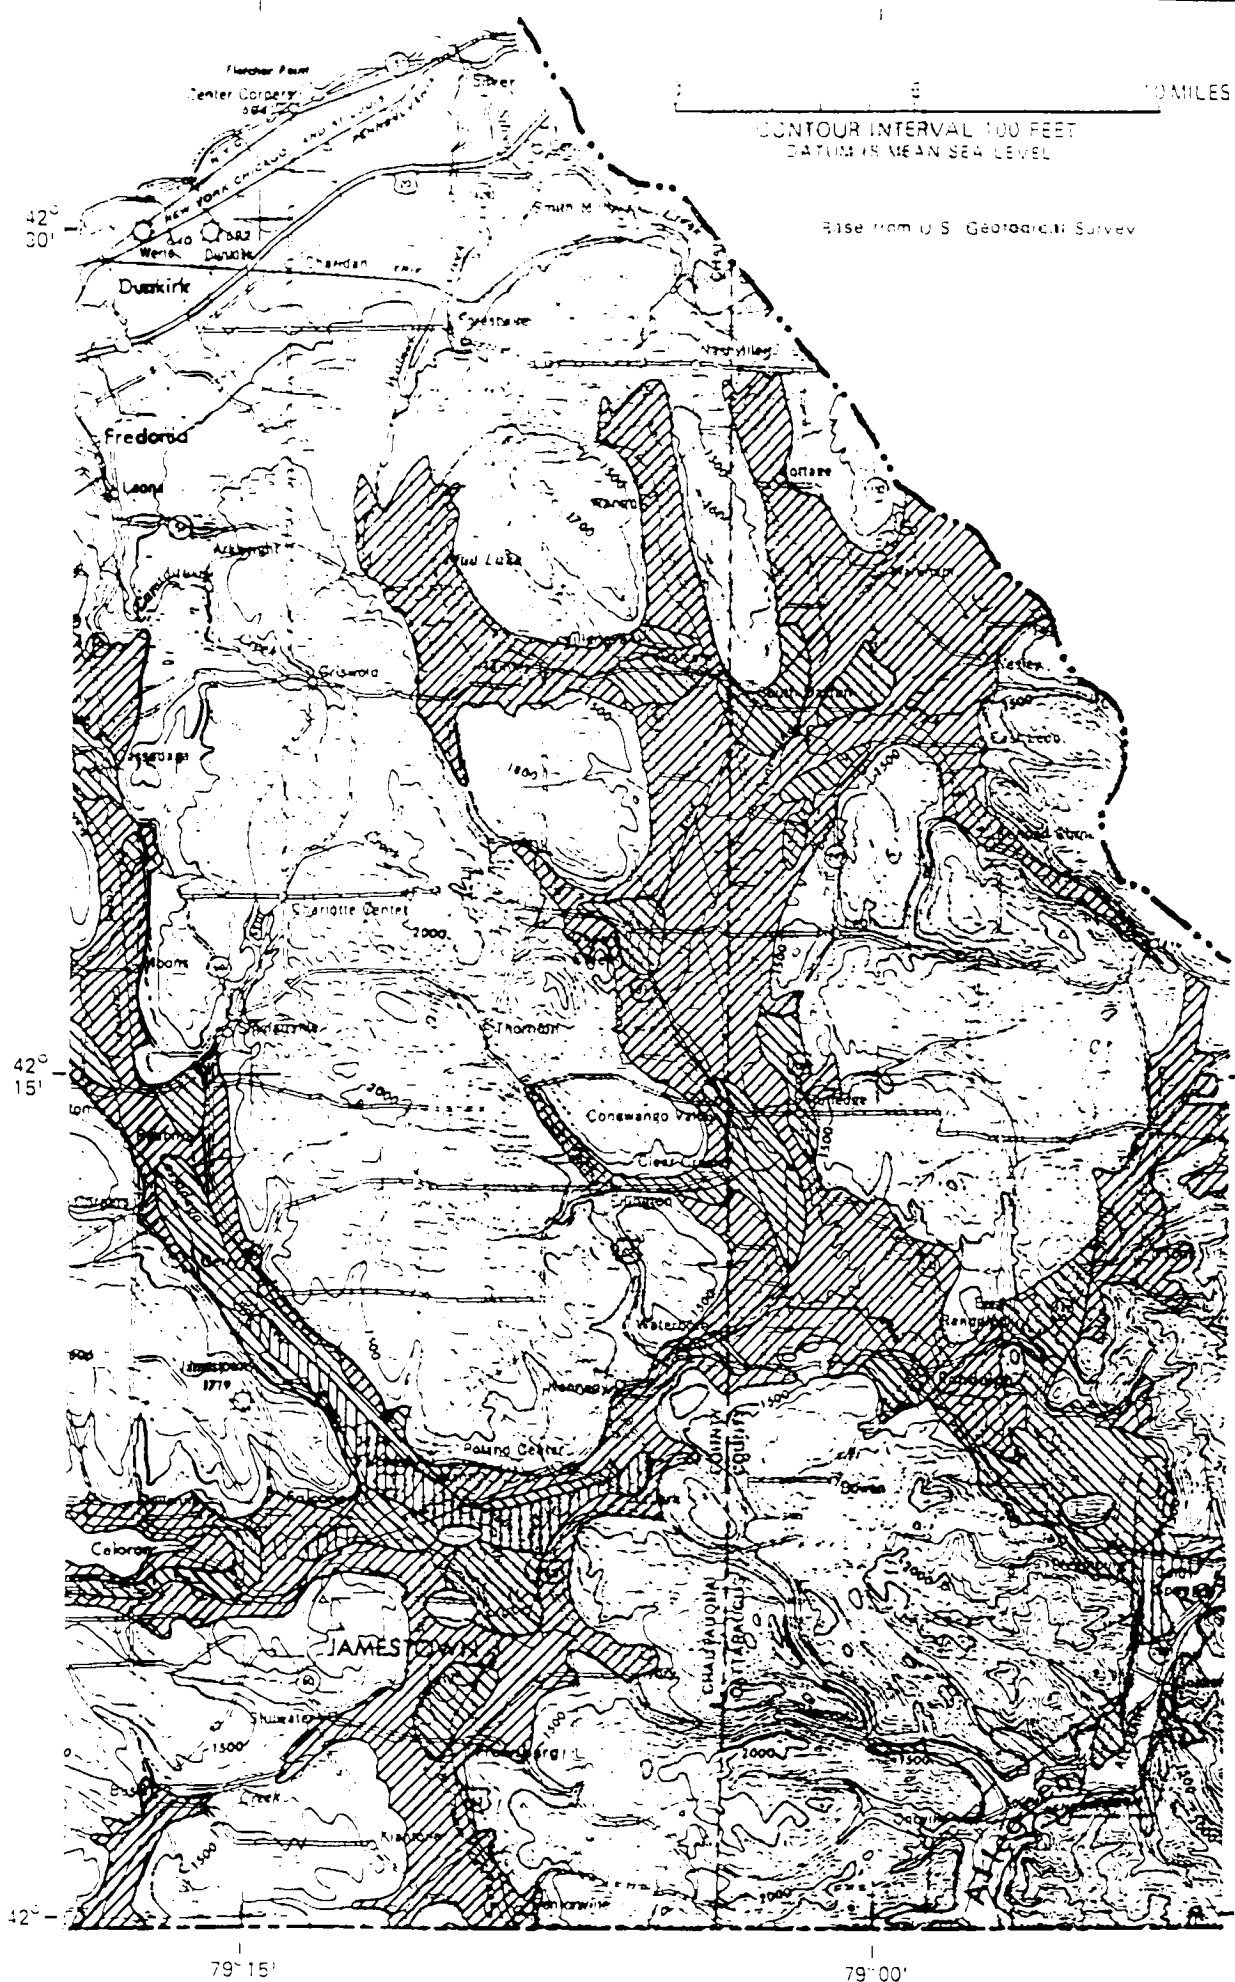


Figure 10C.--Ground-water availability, Allegheny River basin, New York (western-central part).



5 MILES
 CONTOUR INTERVAL 100 FEET
 DATUM IS MEAN SEA LEVEL

Base from U.S. Geological Survey

42° 30'

42° 15'

42°

79° 15'

79° 00'

BASE MAP FOR FIGURE 10C

Elongate deposits of sand and gravel running parallel to the Lake Erie shore consist of about 25 feet of sand and gravel and form a beach ridge. These deposits are not an important aquifer because water is not retained but drains rapidly toward Lake Erie. Only a very small thickness of the deposits is saturated. Locally, these deposits may serve as a source of water for domestic or stock uses.

Because the lithology (and hence the permeability) of the unconsolidated aquifers in the study area varies both vertically and horizontally, detailed estimates of ground-water availability from small segments of aquifers are not shown in figure 10 nor are they discussed in the text. Additional subsurface geologic and hydrologic data will be required before well-field development or well-field planning are undertaken. Arbitrarily placed wells of accumulative capacity equal to the aquifer yields presented in this report may not necessarily yield the total estimated aquifer yield when pumped simultaneously. A basic knowledge of well and aquifer hydraulics is assumed in presenting the potential aquifer-yield and well-yield data in the text and in figure 10. For information pertaining to the engineering aspects of well-spacing and location, the reader is referred to Meinzer (1923 and 1932), Heath and Trainer (1968), and Todd (1959).

The major unconsolidated aquifers of the Allegheny River basin in New York are described, and their potential yields are estimated in the remainder of this section of this report. These estimates represent the yields of the aquifers that could be sustained indefinitely. They are based on individual aquifer storage volume with complete recharge during each annual spring thaw and on the induced stream infiltration that would result from ground-water withdrawal. This method is applied because of the varying geohydrologic conditions existing in the aquifers in this section of New York State.

Aquifer discharge, measured as stream base flow, is complexly related to aquifer recharge in the Allegheny River basin and cannot be used as a direct estimate of potential ground-water yield as has been done in other areas of New York State. For example, because of the high permeability of valley aquifers and relatively steep valley gradients in lower Fivemile and Great Valley Creek valleys, both Fivemile and Great Valley Creeks lose rather than gain water when other streams of the area are in base-flow condition. Base-flow-stream discharge as a measure of aquifer recharge in these and other stream valleys in this study area would be misleading, and maps showing base-flow discharge are therefore not included in this presentation.

Aquifers in the Allegheny River Valley

A brief review of the Pleistocene geologic history of the Allegheny River valley helps explain the geologic framework of the valley. Before Pleistocene glaciation, the Allegheny River flowed northward and cut a steep-walled valley in shale and sandstone bedrock. The stream flowed northward through the present upper Conewango and lower Cattaraugus valleys, as part of the St. Lawrence drainage system. Advance of the glacial ice dammed this drainage and formed a long sinuous lake in the valley with a surface altitude of about 1,480 feet above present sea level. An approximately 211-foot

thickness of clay and silt was deposited in the lake, and deltas of sand and gravel were deposited where streams entered the lake. To the south, the lake spilled over a divide near Kinzua, Pennsylvania; and the outflow eroded a channel to the Ohio River drainage system through which the lake drained. The glacier then advanced into the Allegheny River valley where it deposited large quantities of sand, gravel, and silt to form stratified valley-train deposits of more than 300-foot thickness at some places. After the Allegheny River subsequently cut through about 180 feet of these deposits near Quaker Bridge and Onoville, only a few high terraces along the valley sides remained.

Sand and gravel deposits extend from about 40 to 100 feet below the present river level and rest on as much as 200 feet of clay and silt. The sand and gravel deposits are generally thicker downstream and westward than they are upstream and eastward. Saturated sand and gravel deposits extend both upvalley and downvalley from Olean and constitute the most extensive high-yield aquifer in the study area (figs. 5 and 10). This aquifer is about as wide as the valley floor, averages about 80 feet in thickness, and extends from the Allegheny Reservoir, near Salamanca, upvalley into Pennsylvania. Typical geologic sections through the valley are shown in figures 11 and 12.

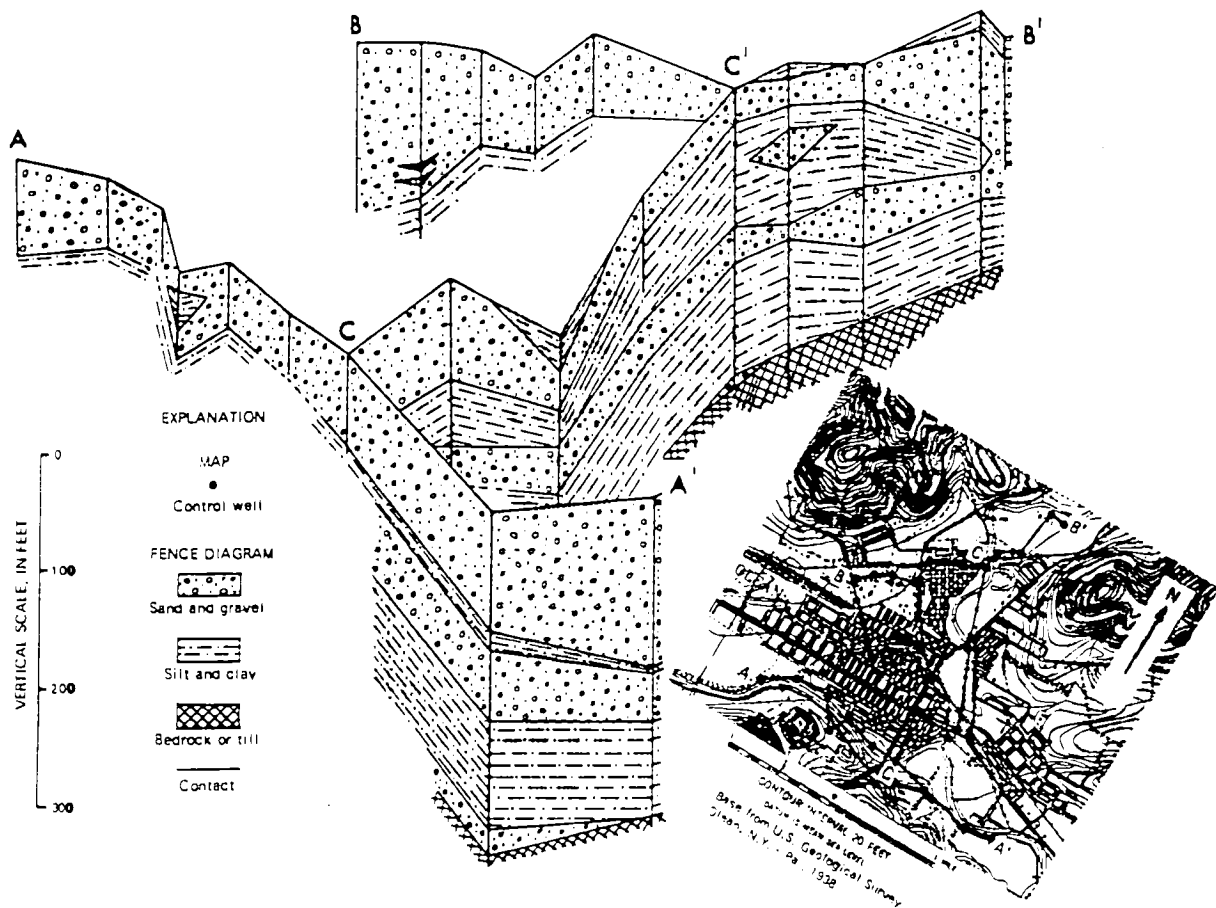


Figure 11.--Lithology of deposits at Olean.

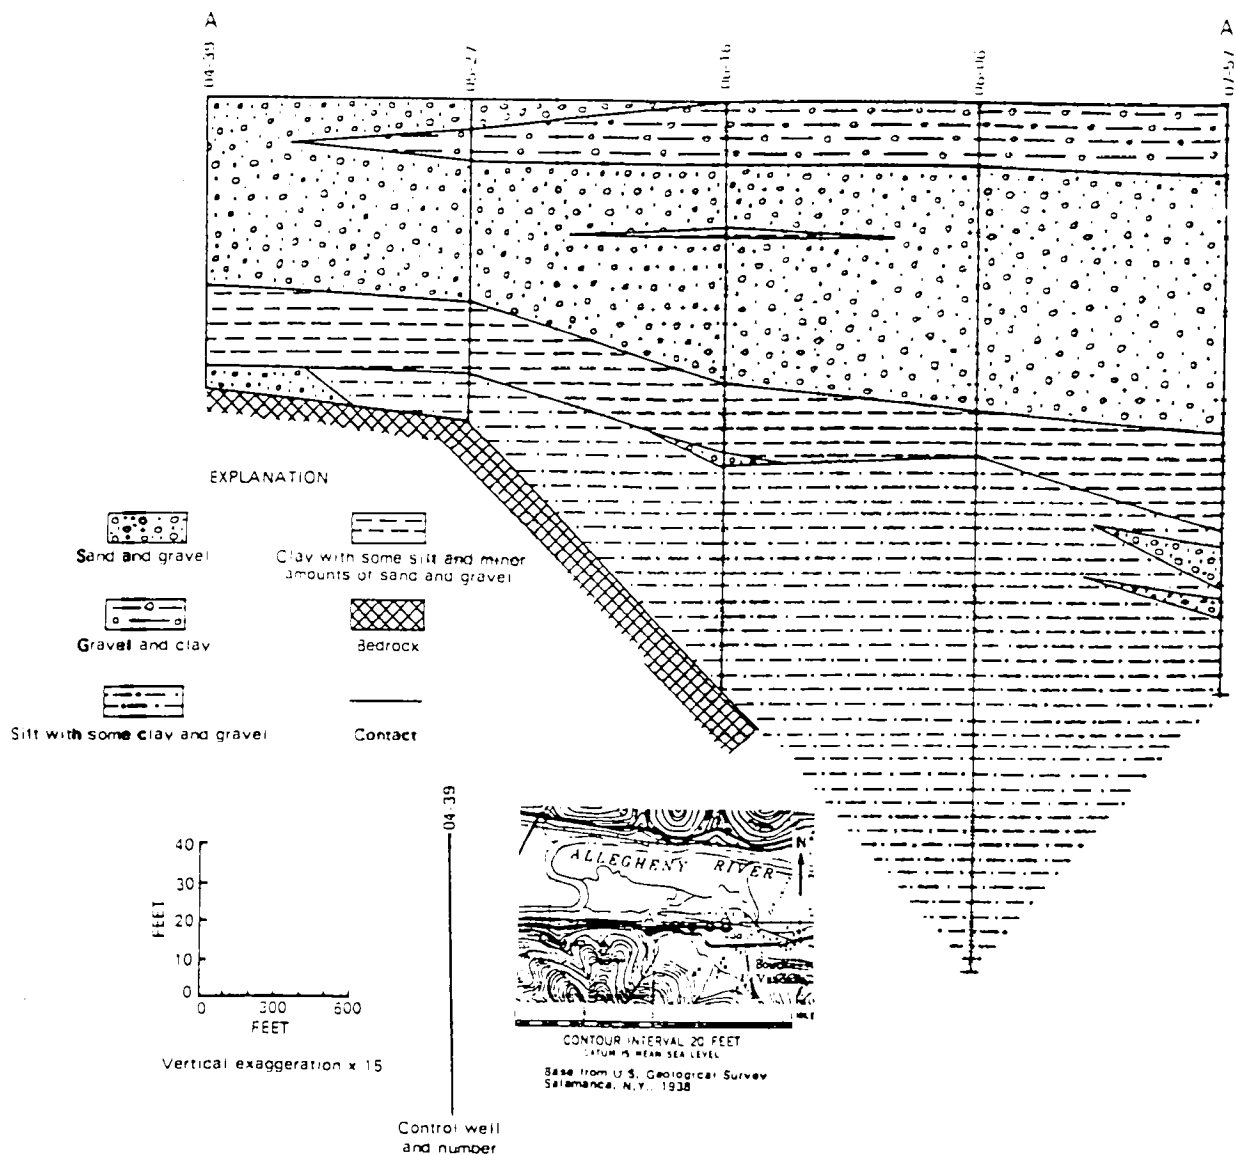


Figure 12.--Allegheny River valley near South Vandalia.

Because of lithologic variations, the aquifer permeability varies both horizontally and vertically. Some of the most permeable layers of the aquifer yield water at exceptionally high rates, as is evidenced by numerous screened wells that yield more than 1,000 gpm. Although depths to the most permeable parts of the aquifer may vary from place to place, the entire thickness of sand and gravel may be considered part of the aquifer and capable of yielding water.

The saturated unconsolidated deposits in the Allegheny River valley of the report area comprise a ground-water reservoir of about 20 square miles in area by an average of 80 feet in thickness. The amount of water stored in the deposits, using a specific yield (amount of water that can be drained by gravity from a given volume of material) of 20 percent, is about 65 billion gallons.

Under natural conditions, storage in the aquifer fluctuates only slightly. During summer and early fall, when the evapotranspiration rate is high, ground water discharging from aquifer storage constitutes the major source of the flow of the Allegheny River. During early spring, when streamflow is abundant and the evapotranspiration rate is low, the aquifer is recharged. However, because the aquifer is already nearly filled to capacity and the remaining storage capacity is rapidly replenished, most of the potential recharge is rejected and flows out of the study area. Much of this spring runoff might be stored in reservoirs for use during summer and fall when water is not so plentiful. The aquifer in the Allegheny River valley is a reservoir that could be available for this purpose.

Management of storage in the Allegheny River valley aquifer would significantly add to the area's water supply. To take advantage of the tremendous storage capacity of the aquifer, storage must be available for recharge during the period of abundant water in the spring. Greater lowering of the water table, by increased withdrawal and use of ground water to supply more industrial and municipal needs during the relatively dry period (about 200 days) from spring to fall, could make such storage space available.

Utilization of the storage capacity of the Allegheny River valley aquifer can be illustrated by computing yield from storage while temporarily ignoring potential-induced stream infiltration and assuming that 30 feet of the aquifer is dewatered in the 200-day period. The 30-foot average depth of dewatering is one-half the available drawdown in wells with screen open to the bottom 20 feet of an aquifer that is 80 feet thick. Excluding recharge during the period, approximately 170×10^8 cubic feet of aquifer would be dewatered; and a yield of 255×10^8 gallons of water (an average of about 120 mgd) would be obtained. During the remaining 165 days of the year, this volume of water would be replaced by recharge from the increased flow in the Allegheny River.

In addition to the 128 mgd drawn from aquifer storage, inflow from the Allegheny River and its tributaries is available as surface water or as ground water through induced infiltration. Inflows from the major tributaries and headwaters of the Allegheny River that are expected to be equaled or exceeded 90 percent of the time in average years (R. R. Shields, written commun., 1969) are:

	<u>Cubic feet per second</u>
Allegheny River at Eldred, Pa.	74
Oswayo Creek near Mill Grove, N.Y.	20
Olean Creek near Olean, N.Y.	26
Tunungwant Creek at Limestone, N.Y.	<u>24</u>
TOTAL	144 (93 mgd)

The 93 mgd streamflow during average years, or less during dry years, could be induced to recharge the aquifer through the Allegheny River streambed, which has an approximate area of about 44×10^6 square feet (32 miles long by 260 feet wide). With hypothetical withdrawal wells placed close enough to the Allegheny River to produce a maximum hydraulic gradient of 1 foot per foot, the minimum average streambed permeability necessary to induce infiltration of 93 mgd can be computed by Darcy's law, $P = \frac{Q}{TA}$:

where Q = quantity, in gallons per day
 P = permeability of the streambed, in gallons per
 day per square foot
 l = hydraulic gradient, in feet per foot
 A = area, in square feet

$$P = \frac{Q}{lA}$$

$$P = \frac{93 \times 10^6}{1 \times 44 \times 10^6}$$

$$P = 2.1 \text{ gpd per ft}^2$$

This permeability is much lower than the expected 20 gpd per ft² (gallons per day per square foot) average permeability of the streambed material (Todd, 1959).

The 128 mgd from storage and the conservative estimate of 93 mgd of possible induced stream infiltration give a total of about 220 mgd of ground water available from the Allegheny River valley aquifer during the season when water is normally in shortest supply and in greatest demand. Induced infiltration of 93 mgd would be expected to cause the river to go dry 10 percent of the time in an average year and more than 10 percent in dry years. In addition to the stream inflows given, enough water flows through the Allegheny River near Salamanca 50 percent of the time to recharge the aquifer at an estimated induced infiltration rate of 880 mgd. This potential infiltration capacity, computed by Darcy's law, is based on a streambed permeability of 20 gpd per ft² and a maximum hydraulic gradient of 1 foot per foot. Because the potential induced infiltration is 880 mgd 50 percent of the time and the storage capacity of the reservoir can sustain a withdrawal of 128 mgd for 200 consecutive days, the ground-water yield of 220 mgd is considered a reasonable minimum estimate of the aquifer's potential yield.

The withdrawal figures are based on management practices of solely pumping from the existing surface- and ground-water reservoir system and are not dependent on return flow. Used water is or can be returned to the reservoir locally through septic tanks, cesspools, the riverbed, or other means. However, excessive recycling of such water could impair water quality in the aquifer. For yields exceeding 220 mgd, water-management and economic factors, rather than hydrology, are the dominant factors controlling the water yield of this river-aquifer system.

Production of ground water from the Allegheny River valley aquifer has been significant since about 1946. From 1946 to 1953, the Felmont Oil Corporation (formerly Case Pomeroy and Company, Inc.) withdrew more than 4.6 mgd from this aquifer for use in the water-flood method for the secondary recovery of petroleum at the Bradford oil field, in Pennsylvania. Production from the Felmont Oil Corporation's water-well field is shown in figure 13. This well field is on the south side of the Allegheny River, near Olean. Water from this field is no longer used in the secondary recovery of petroleum, but about 7 mgd is pumped to chemical plants in North Olean.

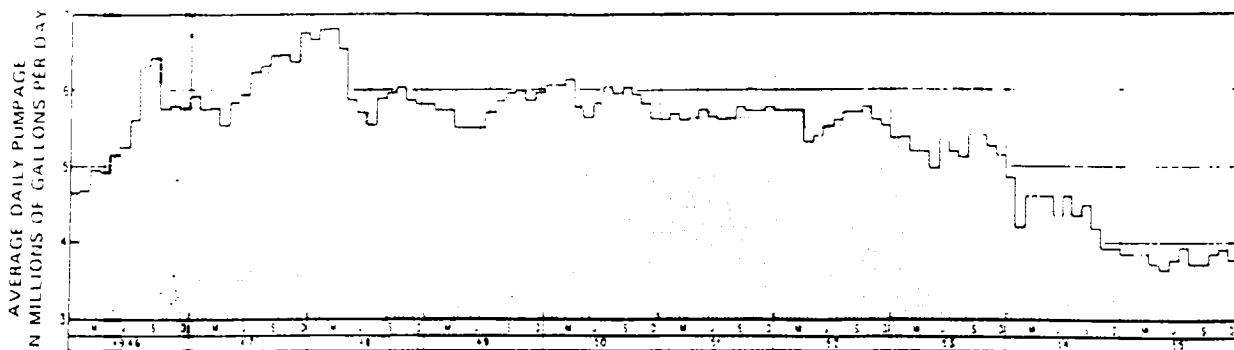


Figure 13.--Ground-water pumpage from Felmont Oil Corporation water-well field south of the Allegheny River.

Another field of six water wells owned by Felmont Oil Corporation was completed in 1966 at the chemical plants north of the Allegheny River. This well field produces an additional 7 mgd. In the fall of 1968, the Felmont Oil Corporation began testing the aquifer for additional wells near Olean.

The Pennzoil Company (formerly South Penn Oil Co.) operates water wells in the Allegheny River valley at South Vandalia. The water produced there is injected into an oil-bearing sandstone for secondary recovery of petroleum in the area of Chipmunk Creek Valley.

The highest-yielding water well at South Vandalia taps two separate sand and gravel aquifers and was pumped at 1,000 gpm with 20 feet of draw-down. Almost all the wells in the two water-well fields operated by Felmont Oil Corporation have been pumped at 1,000 gpm or more. Felmont well 420404N0782836.2 (table 4) reportedly yielded 1,420 gpm with 4 feet of draw-down. Test wells drilled in the Allegheny River valley, for the city of Olean, tapped the Allegheny River valley aquifer; and water-supply wells for Salamanca and the village of Allegany, as well as the wells supplying numerous small industrial and commercial establishments, also tap the Allegheny River valley aquifer. The ability of this aquifer to yield large quantities of water is well established.

Some wells tapping the Allegheny River valley aquifer have yielded hard water, and some have yielded iron-bearing water. Water quality is not uniform throughout the aquifer, and additional exploration is needed to define a quality-distribution pattern for the aquifer's water.

Aquifers in the Valleys of Conewango Creek Drainage Basin

This section describes the geologic framework and the hydrology of the three major stream valleys.

Aquifers in Chautauqua Lake, Cassadaga Creek, and Conewango Creek valleys have been described in detail by Crain (1966). During the advance of the glacier, the ice abraded, eroded, and enlarged these three valleys. As the glacier retreated, drainage from the valleys was blocked on the south by moraines and on the north by glacial ice and long deep lakes formed in the

CONCLUSIONS AND RECOMMENDATIONS

Ground water is available in sufficient quantities for industrial and public supply in the Allegheny River basin, primarily from unconsolidated aquifers in the valleys of the Allegheny Plateau. Lesser amounts of ground water, mostly in bedrock, in the uplands of the plateau are usually available for individual-home supply. Meager quantities of ground water, generally adequate for small domestic supplies, are available only from shallow depths in bedrock on the Lake Erie Plain.

The most productive aquifer in the study area is a water-table aquifer consisting of sand and gravel in the Allegheny River valley, upstream from the Allegheny Reservoir at Salamanca. This aquifer has a potential natural yield of more than 220 mgd, although such a large withdrawal would probably cause the river to go dry 10 percent of the time in average years and more than 10 percent in dry years. Smaller unconsolidated aquifers in both the fully and the partially glaciated tributary stream valleys of the Allegheny River drainage system can supply water needs for light industrial and public supplies.

Ground-water supplies are less adequate and are more expensive to develop in the western part of the Allegheny River basin than in the eastern part because significant aquifers in the western part are generally deep and artesian.

Bedrock aquifers in the area generally yield small quantities of ground water from bedding planes, fractures, and joints. In the upland areas, wells tapping bedrock usually yield enough water for home or farm supplies. Only on the Lake Erie Plain, and at depth in some valleys, is the bedrock aquifer unreliable as a water source. In these locations, water from bedrock is commonly too salty to be acceptable for domestic supply. In the valley areas, however, supplies of good-quality water can be obtained from unconsolidated aquifers.

Ground-water reserves in the New York part of the Allegheny River basin are estimated to be sufficient to supply the probable population of the area for many decades. The aquifers capable of yielding sufficient quantities of water are near the present urban centers and the areas of probable population and industrial growth. However, on the Lake Erie Plain, there are no aquifers capable of sustaining municipal or industrial water supplies.

One of the most significant potential problems associated with the area's aquifers is ground-water pollution. Aquifers underlie villages and cities in the area, and the increasing wastes from urban and industrial growth are likely to continue to be concentrated over the aquifers. The spatial relationship of water reservoirs (aquifers) and waste disposal poses a serious threat of pollution to the water supplies tapping these reservoirs.

This report is based mainly on geologic and hydrologic data available through 1967. As development of the study area proceeds and the need for water increases, more detailed subsurface geologic and hydrologic data will become available. Future studies, using these additional data, will enable refinement of the geohydrologic models and relationships presented in this report. Exploratory drilling and aquifer testing will most likely be required for future development of individual supplies. The information developed from such work is invaluable for continuing water-resources appraisal and development plans. Continual collection and central storage geohydrologic data would be advantageous for efficient maintenance of the information needed for planning and management of the area's ground-water resources.

SELECTED REFERENCES

- Aultman, W. W., 1958, Synthetic detergents as a factor in water softening economics: Jour. Am. Water Works Assoc., v. 50, no. 10, p. 1353-1362.
- Beetem, W. A., 1954, Chemical quality of water resources of the Conewango Creek basin: New York State Dept. Commerce Bull. 1, 58 p.
- Brashears, M. L., Jr., 1941, Ground-water temperature on Long Island, N.Y., as affected by recharge of warm water: Econ. Geology, v. 36, no. 8, p. 811-828.
- Brewer, Charles, Jr., 1933, Oil and gas geology of the Allegany State Park: New York State Mus. Circ. 10, 22 p.
- Broughton, J. G., and others, 1962, Geologic map of New York, 1961: New York State Mus. and Sci. Service, Geol. Survey, Map and Chart Ser. no. 5.
- Cochran, K. R., and others, 1957, The secondary recovery of oil by water-flooding, in New York State Geol. Assoc. Guidebook, twenty-ninth annual meeting, Wellsville, N.Y., p. 39-49.
- Comly, H. H., 1945, Cyanosis in infants caused by nitrates in well water: Am. Med. Assoc. Jour., v. 129, no. 2, p. 112-116.
- Crain, L. J., 1966, Ground-water resources of the Jamestown area, New York, with emphasis on the hydrology of the major stream valleys: New York State Water Resources Comm. Bull. 58, 167 p.
- _____, 1969, Ground-water pollution from natural gas and oil production in New York: New York State Water Resources Comm. Rept. Inv. RI-5, 15 p.
- Dethier, B. E., 1966, Precipitation in New York State: Cornell Univ. Agr. Expt. Sta. Bull. 1009, 78 p.
- Durfor, C. N., and Becker, Edith, 1964, Chemical quality of public water supplies of the United States and Puerto Rico, 1962: U.S. Geol. Survey Hydrol. Inv. Atlas HA-200.
- Fairchild, H. L., 1925, The Susquehanna River in New York and evolution of western New York drainage: New York State Mus. Bull. 256, 99 p.
- Federal Water Pollution Control Administration, 1967, Biology of water pollution: U.S. Dept. Interior, 290 p.
- Fenneman, N. M., 1938, Physiography of eastern United States: New York, McGraw-Hill Book Co., Inc., 714 p.
- Fettke, C. R., 1938, The Bradford Oil Field, Pennsylvania and New York: Pennsylvania Geol. Survey 4th Ser. Bull. M21, 454 p.

- Fisher, D. W., and others, 1962, Geologic map of New York, 1961: New York State Mus. and Sci. Service, Geol. Survey, Map and Chart Ser. no. 5 (Niagara sheet, scale 1:250,000).
- Frimpter, M. H., 1973, Chemical quality of streams, Allegheny River basin and part of the Lake Erie Basin, New York: New York State Dept. Environmental Conserv., Basin Planning Rept. ARB-3, 79 p.
- Heath, R. C., 1964, Ground water in New York: New York State Water Resources Comm. Bull. GW-51.
- Heath, R. C., and Trainer, F. W., 1968, Introduction to ground-water hydrology: New York, John Wiley and Sons, Inc., 284 p.
- Hem, J. D., 1959, Study and interpretation of the chemical characteristics of natural water: U.S. Geol. Survey Water-Supply Paper 1473, 269 p.
- Herrick, J. P., 1949, Empire oil, the story of oil in New York State: New York, Dodd Mead and Co., 474 p.
- Kreidler, W. L., 1953, History, geology, and future possibilities of gas and oil in New York State: New York State Mus. Circ. 33, 58 p.
- _____, 1963, Selected deep wells and areas of gas production in western New York: New York State Mus. and Sci. Service Bull. 390, 404 p.
- Leggette, R. M., 1936, Ground water in northwestern Pennsylvania: Pennsylvania Geol. Survey 4th Ser. Bull. W3, 215 p.
- Lobeck, A. K., 1927, A popular guide to the geology and physiography of Allegany State Park: New York State Mus. Handb. 1, 288 p.
- MacClintock, Paul, and Apfel, E. T., 1944, Correlation of the drifts of the Salamanca re-entrant, New York: Geol. Soc. America Bull. v. 55, no. 10, p. 1143-1164.
- McKee, J. E., and Wolf, H. W., eds., 1963, Water quality criteria: California Water Quality Control Board, Pub. 3-A, 548 p.
- Meinzer, O. E., 1923, Outline of ground-water hydrology: U.S. Geol. Survey Water-Supply Paper 494, 71 p.
- _____, 1932, Outline of methods for estimating ground-water supplies: U.S. Geol. Survey Water-Supply Paper 638-C, 144 p.
- Meinzer, O. E., and Stearns, N. D., 1929, A study of ground water in the Pomperaug basin, Conn., with special reference to intake and discharge: U.S. Geol. Survey Water-Supply Paper 597-B, p. 73-146.
- Morrison, T. M., and others, 1916, Soil survey of Chautauqua County, New York: U.S. Dept. Agriculture, 60 p.

- Muller, E. H., 1963, Geology of Chautauqua County, New York, Part II, Pleistocene geology: New York State Mus. and Sci. Service Bull. 392, 60 p.
- New York State Department of Health, 1960, Public water supply data: Bureau Environmental Sanitation Bull. 19, 186 p.
- Pauszek, F. H., 1956, Chemical quality of water resources in the Allegheny River and Chemung River basins, New York, 1953-54: New York State Dept. Commerce Bull. 2, 44 p.
- Pearson, C. S., and Cline, M. G., 1956, Soil survey of Allegany County, New York: U.S. Dept. Agriculture Ser. 1942, no. 12, 141 p.
- Pearson, C. S., and others, 1940, Soil survey of Cattaraugus County, New York: U.S. Dept. Agr. Ser. 1935, no. 12, 65 p.
- Perlmutter, N. M., Lieber, Maxim, and Frauenthal, H. L., 1963, Movement of waterborne cadmium and hexavalent chromium wastes in South Farmingdale, Nassau County, Long Island, New York: U.S. Geol. Survey Prof. Paper 475-C, art. 105, p. 179-184.
- Rasmussen, W. C., and Andreasen, G. E., 1959, Hydrologic budget of the Beaverdam Creek basin, Maryland: U.S. Geol. Survey Water-Supply Paper 1472, 106 p.
- Rainwater, F. H., and Thatcher, L. L., 1960, Methods of collection and analysis of water samples: U.S. Geol. Survey Water-Supply Paper 1454, 301 p.
- Schicht, R. J., and Walton, W. C., 1961, Hydrologic budgets for three small watersheds in Illinois: Illinois State Water Survey Rept. Inv. 40, 40 p.
- Tesmer, I. H., 1963, Geology of Chautauqua County, New York, Part I, Stratigraphy and paleontology (Upper Devonian): New York State Mus. and Sci. Service Bull. 391, 65 p.
- Thwaites, F. T., 1935, Ground water supplies of Allegany State Park, 1932: New York State Mus. Circ. 11, 62 p.
- Todd, D. K., 1959, Ground water hydrology: New York, John Wiley and Sons, Inc., 336 p.
- U.S. Public Health Service, 1962, Drinking water standards: U.S. Public Health Service Pub. No. 956, 61 p.

Table 4.--Records of selected wells in the Allegheny River basin
and part of the Lake Erie basin, New York

EXPLANATION

For explanation of well number and location see section, "Numbering and Location System."
All depths and altitudes are rounded to the nearest foot.

Well finish:

- F - Gravel wall, perforated or slotted casing
- G - Gravel wall, commercial screen
- Q - Open end
- P - Perforated or slotted casing
- S - Screen
- T - Sand point
- W - Walled or shored
- X - Open hole in aquifer (generally cased to aquifer)

Water-bearing material:

- UNCLFD - Unclassified
- SED - Sediment
- UNCONSOL - Unconsolidated
- FRACT - Fractured
- JOINT - Jointed

Use:

A - Air conditioning	N - Industrial
B - Bottling	P - Public supply
C - Commercial	S - Stock supply
F - Fire protection	T - Institutional
H - Domestic	U - Unused
I - Irrigation	Z - Other

Table 4.--Records of selected wells in the Allegheny River basin and part of the Lake Erie basin, New York (Continued)

WELL LOCATION (LAT.-LONG.)	OWNER	WELL DEPTH (FT)	CASING DIAM- ETER (IN)	WELL FINISH	CASING DEPTH (FT)	DEPTH TO CONSL. ROCK (FT)	WATER-BEARING MATERIAL	ALTITUDE (FT)	WATER LEVEL BELOW LAND SURFACE (FT)	DATE OF WATER- LEVEL MEAS.	YIELD (GPM)	USE
ALLEGANY COUNTY												
420004N0781647.1	HILL WALTER	135	--	P	--	--	SAND AND GRAVEL	1457	15	--	--	H
420012N0781440.1	WATERMAN DALE	32	6	P	--	--	SAND AND GRAVEL	1480	11	--	--	H
420023N0780657.1	OLMSTEAD RICHA	90	6	X	85	85	SHALY OR SLATY SANDSTONE	1535	20	--	--	H
420033N0780402.1	WILSON	110	6	X	90	90	SHALY OR SLATY SANDSTONE	1547	30	--	--	H
420043N0780136.1	MADISON CLIFFOR	74	6	X	73	--	SAND AND GRAVEL	1587	34	--	--	H
420044N0780327.1	JOHNSON RUSSEL	80	6	O	80	100	SAND AND GRAVEL	1555	14	--	25	H
420116N0781321.1	KINNEY H A	335	7	X	265	--	SHALY OR SLATY SANDSTONE	1508	10	--	--	H
420128N0781330.1	HAZARD LYLE	106	6	X	--	48	SHALY OR SLATY SANDSTONE	1560	71	--	15	H
420227N0781133.1	MESSER OIL CORP	85	6	X	85	--	FINE SAND AND GRAVEL	1560	--	--	--	N
420235N0781144.1	MESSER OIL CORP	85	10	S	70	--	FINE SAND AND GRAVEL	1540	4	8-47	900	H
420240N0781142.1	MESSER OIL CORP	93	10	S	--	--	SAND AND GRAVEL	1540	--	--	900	N
420256N0781055.1	COHLES MAE	72	--	--	--	--	SAND AND GRAVEL	1600	--	--	--	H
420327N0781825.1	ESHELMAN CHARLE	97	6	X	77	--	SHALY OR SLATY SANDSTONE	1510	22	--	--	H
420346N0781020.1	BOLIVAR VILLAGE	110	--	S	--	--	SAND AND GRAVEL	1581	--	--	--	P
420346N0781022.1	BOLIVAR VILLAGE	120	--	--	--	--	SAND AND GRAVEL	1581	--	--	--	P
420347N0780914.1	PAYNE DAVE	252	6	X	--	--	SHALY OR SLATY SANDSTONE	1753	--	--	--	H
420349N0780917.1	CARR PAUL	232	7	X	--	--	SHALY OR SLATY SANDSTONE	1730	--	--	--	H
420409N0781647.1	BOY RAY	20	36	W	0	--	SAND AND GRAVEL	1560	12	--	--	H
420431N0780436.1	MESSER OIL CORP	253	10	X	75	--	SHALY OR SLATY SANDSTONE	1900	33	12-39	100	H
420434N0780712.1	MAINS WILLIAM	140	--	--	--	--	SHALY OR SLATY SANDSTONE	1862	--	--	--	H
420438N0781734.1	RIXBY LEO	74	4	O	74	--	SAND AND GRAVEL	1537	9	--	--	H
420441N0780640.1	GRISHOOD SAMUEL	300	6	X	--	--	SHALY OR SLATY SANDSTONE	2095	--	--	--	H
420447N0781530.1	MESSER OIL CORP	227	10	X	134	--	SHALY OR SLATY SANDSTONE	1560	20	3-39	50	H
420448N0780938.1	PUTNAM FRANK	300	4	X	--	--	SHALY OR SLATY SANDSTONE	1640	0	--	--	H
420509N0781550.1	MESSER OIL CORP	276	8	P	87	--	SHALY OR SLATY SANDSTONE	--	2	--	110	H
420534N0780914.1	MESSER OIL CORP	279	10	X	31	--	SHALY OR SLATY SANDSTONE	1660	5	8-42	125	N
420542N0781728.1	BOY SCOUTS AMER	65	6	O	65	--	SAND AND GRAVEL	1680	6	--	7	H
420547N0781723.1	BOY SCOUTS AMER	262	5	X	204	--	SHALY OR SLATY SANDSTONE	1690	--	--	--	H
420610N0781507.1	SMITH KENNETH	120	6	X	115	--	SHALY OR SLATY SANDSTONE	1580	15	--	--	H
420640N0780756.1	FAULKNER JOHN	65	6	X	20	--	SHALY OR SLATY SANDSTONE	1861	30	--	--	H
420645N0781458.1	ANDRUSS JOHN	58	2	O	58	--	SAND AND GRAVEL	1502	27	--	--	H
420737N0781435.1	LIVE LEON H	110	6	P	104	--	SAND AND GRAVEL	1545	2	--	--	H
420743N0781433.1	HEWITT GENE	13	24	W	0	--	SAND AND GRAVEL	1595	8	9-67	--	H
421023N0781644.1	MARSH DEAN	40	1	T	40	--	SAND	1680	7	--	--	H
421123N0781553.1	BAKER BRIAN	50	2	X	24	24	SEDIMENTARY ROCK, UNCLFD	1650	--	--	--	H
421156N0781631.1	CHIBA CHEESE CO	52	4	X	24	24	SEDIMENTARY ROCK, UNCLFD	1560	11	--	--	H
421201N0781632.1	CHIBA VILLAGE	285	4	X	230	--	SHALY OR SLATY SANDSTONE	1562	--	--	100	H
421244N0781616.1	CHIBA VILLAGE	59	12	S	49	--	SAND AND GRAVEL	1508	34	9-67	450	P
421314N0781658.1	CHIBA VILLAGE	85	8	S	77	--	SAND AND GRAVEL	1482	--	--	300	P
421347N0781639.1	GURNSEY PRODUCT	28	6	O	28	--	UNCONSOL SED	1495	16	--	--	C
421436N0781623.1	HENRIK GEORGE	94	6	O	94	--	UNCONSOL SED	1520	30	--	--	H
421444N0781534.1	BENJAMIN	29	5	O	29	--	UNCONSOL SED	1510	7	--	--	H
421534N0781802.1	TAYLOR ROY	60	6	O	60	--	UNCONSOL SED	1520	14	--	--	S
421838N0781826.1	OTTO HANNA	20	36	W	0	--	SAND AND GRAVEL	1630	10	--	--	O

REFERENCE A-3

S
591
G3803.C2

ECOLOGY & ENVIRONMENT INC.

1122 UNION RD.

Issued March 1940

No. 12 WEST SENECA, N. Y. 14224

Soil Survey

Cattaraugus County New York

By

C. S. PEARSON, in Charge

J. C. BRYANT and WILBER SECOR

Cornell University Agricultural Experiment Station

and

S. R. BAGON, CLARENCE LOUNSBURY

W. J. CAMP, and C. B. BEADLES

United States Department
of Agriculture



UNITED STATES DEPARTMENT OF AGRICULTURE
BUREAU OF PLANT INDUSTRY

In cooperation with the

Cornell University Agricultural Experiment Station

For sale by the SUPERINTENDENT OF DOCUMENTS, WASHINGTON, D. C.

Price 40 cents

vantage of an average frost-free season that is from 1 to 2 weeks longer than on the higher upland soils. Variations in texture and drainage, however, cause as wide a range in agricultural value of the soils of the lowlands as in the agricultural value of the soils of the uplands.

Even though the agriculture consists principally of dairying, the opportunity for diversification of crops is greater than in the uplands. In unfavorable seasons, as when rainfall is below normal, emergency crops can be grown with greater success than on any of the soils of the uplands. Transportation facilities also are superior on the soils of the lowlands. All these factors contribute to a more prosperous type of farming in the numerous valleys and lowlands, as compared with the uplands.

The soils of the lowlands occur on two main types of land forms: (1) Terraces, outwash plains, deltas, and lake plains; and (2) first bottoms and flood plains. Smaller subgroups are indicated on the basis of drainage conditions, as is done with the soils of the uplands.

WELL-DRAINED SOILS OF OLDER OUTWASH MATERIALS AND LAKE DEPOSITS

This subgroup includes members of the Chenango, Unadilla, Otisville, and Mentor series. The first three occupy terrace, or bench, positions and include some of the most highly prized soils of the county. The Chenango soils occur in all the larger valleys north of the section occupied by Dekalb soils. The Mentor soil, which is of minor extent, includes the steep faces of the terraces and certain hummocky areas of stratified drift with kettle-and-kame topography.

These soils are characterized by their grayish-brown friable surface soils and by the bedded sands and gravel of the lower subsoil layers and substrata. The Chenango and Otisville soils are gravelly, but the Unadilla soils are, for the most part, free from gravel. The latter are distinguished also by their bright-yellow or richer brown color, an inheritance from the Dekalb soils, from which they are washed. They are not so productive as the Chenango soils. With the exception of the Otisville soils, the soils of this group have very favorable relief for agriculture. Drainage is excellent, and cultivation can be carried on under a wide range of moisture conditions.

The sale of dairy products accounts for most of the income of farmers located on these soils. Such crops as hay, silage corn, and oats are the most important, but practically all of the alfalfa and considerable of the other specialized crops, including vegetables and small fruits, are produced on the Chenango soils. More than half of the total acreage of Unadilla soils is included in the Allegany Indian Reservation, where very little of the land is under cultivation. The few acres under lease to white farmers in the vicinity of Salamanca give evidence that the soils will produce well under proper management.

Chenango gravelly loam.—Chenango gravelly loam has an 8-inch surface layer of brown or grayish-brown loose mellow gravelly loam. The subsurface material, to a depth of 20 inches, is brownish-yellow or grayish-yellow firm silt loam or gravelly silt loam. Below this in many places is a slightly compact layer composed of dark brown mixed sand and gravel loosely cemented by an infiltration of silt

from 2 to 3 feet into the sand and gravel substratum that underlies the soil, which, at a depth ranging from 3 to 4 feet, generally is bedded or stratified.

This soil as a whole is fairly uniform. Slight variations in texture, thickness of horizons, and quantity of gravel in the surface horizon, however, do occur. The gravel consists mostly of water-worn rounded material, derived mainly from local shales and sandstone, with variable quantities of foreign crystalline materials, and nowhere is it so abundant as to interfere seriously with the preparation of the seedbed. The soil is rather strongly acid in the surface soil and subsoil, but a few limestone pebbles are present in many places at a depth ranging from 6 to 8 feet.

The most extensive areas of Chenango gravelly loam are along Cattaraugus Creek, especially near Gowanda and north of Delevan, and along Slab City Creek in Dayton Town. The total area of this soil is 31 square miles.

The land is level or slightly undulating, and this relief is characteristic of deposits, laid down by water as stream terraces, outwash plains, and deltas, that represent the parent material of the Chenango soils. Drainage is excellent and may be excessive in areas where the gravel content is high.

Acre yields of the main crops grown on Chenango gravelly loam are: Timothy and clover, from 1½ to 2 tons; oats, 40 bushels; silage corn, 8 to 10 tons; and alfalfa, 2 to 3 tons. The soil is physically well adapted to the production of alfalfa, but, because of its acid reaction, some form of lime is necessary for success. The soil warms early in the spring and can be worked almost as soon as the frost leaves the ground—reasons that make this a good soil for the production of potatoes, vegetables, and canning crops. The acreage of such crops, although low at present, is increasing annually. There is a canning factory at South Dayton, and some of the produce is trucked to canneries in Erie County.


The most common rotation is corn, oats, and hay for 2 or 3 years or longer if alfalfa is substituted for the usual timothy and medium red clover. Phosphate fertilizer is applied to land for corn and oats and lime to that for the new alfalfa seedings. Complete fertilizers are used to some extent on the specialized crops.

Practically all the land is under cultivation, with 50 percent of the area devoted to hay, 10 percent to oats, 10 percent to corn, 5 percent to pasture, and the rest to such crops as grapes, other small fruits, and vegetables.

Chenango gravelly silt loam.—Chenango gravelly silt loam, as the name signifies, has a heavier textured surface layer than the gravelly loam. The distinction between these two soils, however, is not very marked, and wherever they are associated the boundary drawn between them is more or less arbitrary. The profiles, aside from the texture of the surface layers, are identical, as are the mode of deposition of the parent material, relief, and reaction. The brown or gray-brown surface layer and the yellowish-brown silty subsurface layer, which overlies bedded sand and gravel, are characteristic of Chenango soils in general.

This soil has its most typical and extensive development in the

REFERENCE A-4

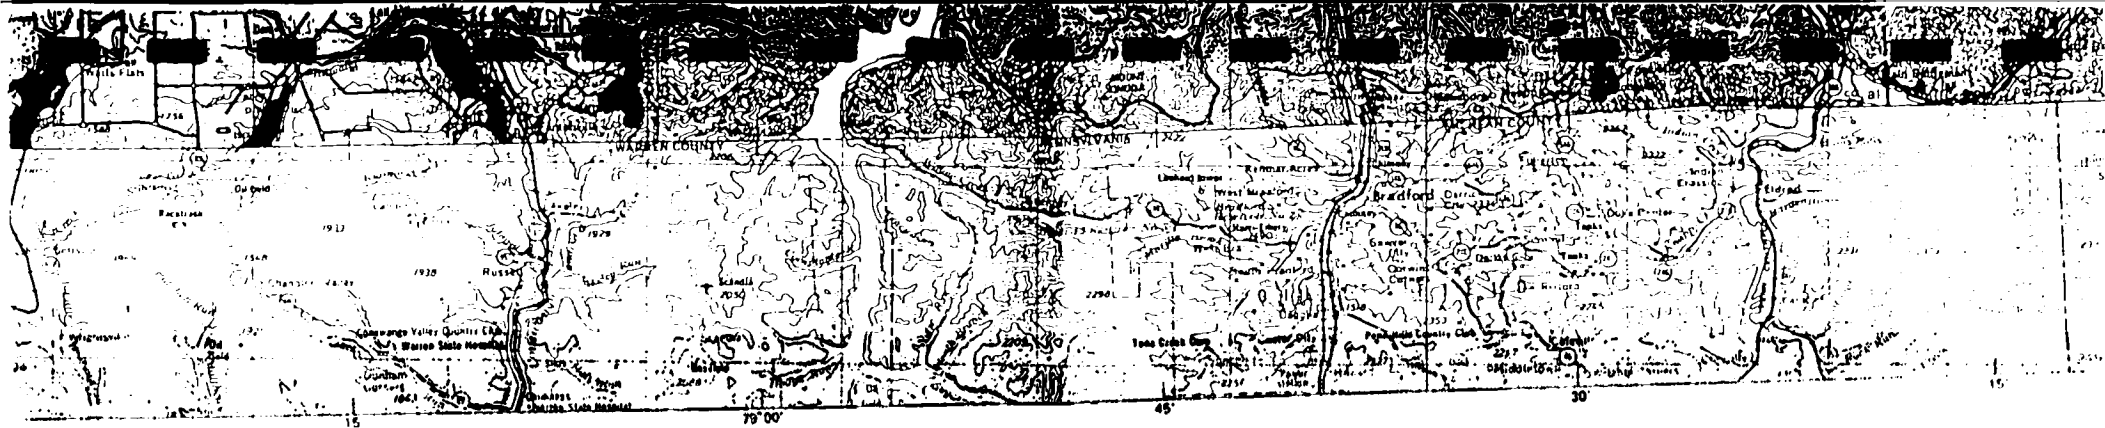


SURFICIAL GEOLOGIC MAP OF NEW YORK


NIAGARA SHEET

Compiled and Edited by Donald H. Cadwell

1988




Scale 1:250,000
CONTOUR INTERVAL 100 FEET
1948 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 11°
CENTER OF THE WEST EDGE TO 13° 00' WESTERLY FOR THE CEN
MEAN ANNUAL CHANGE IS NEGLIGIBLE

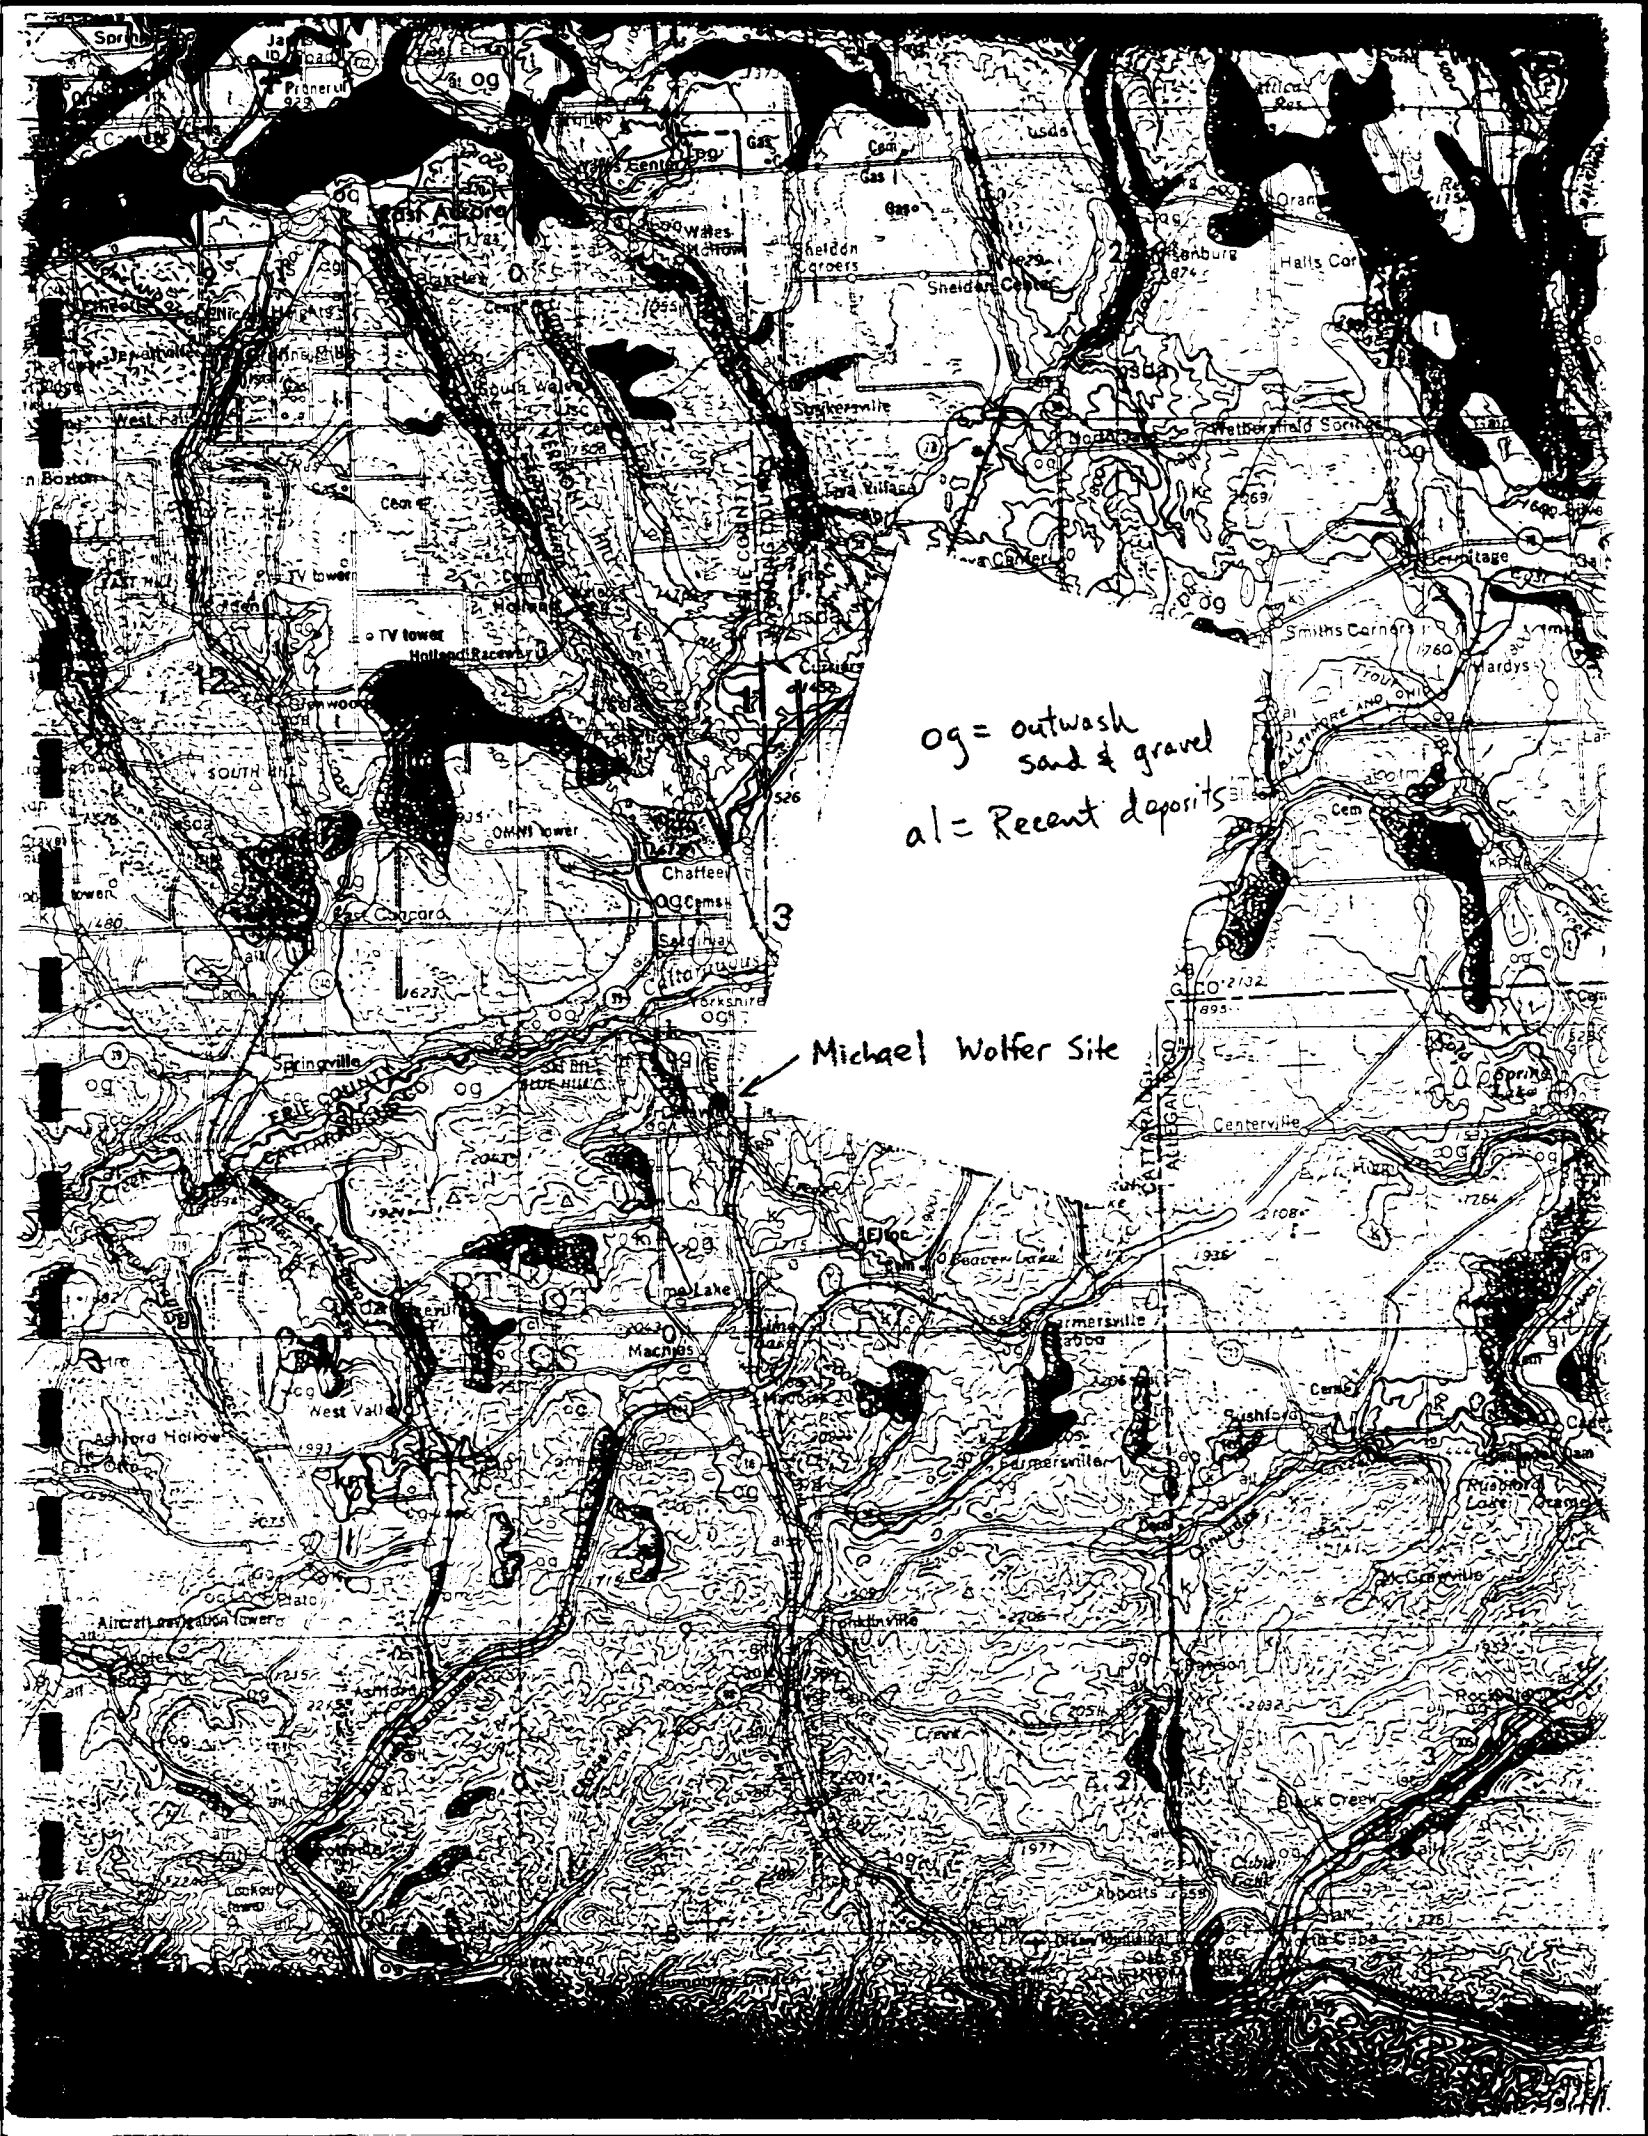

og = outwash
sand & gravel
al = Recent deposits

Michael Wolfer Site

3

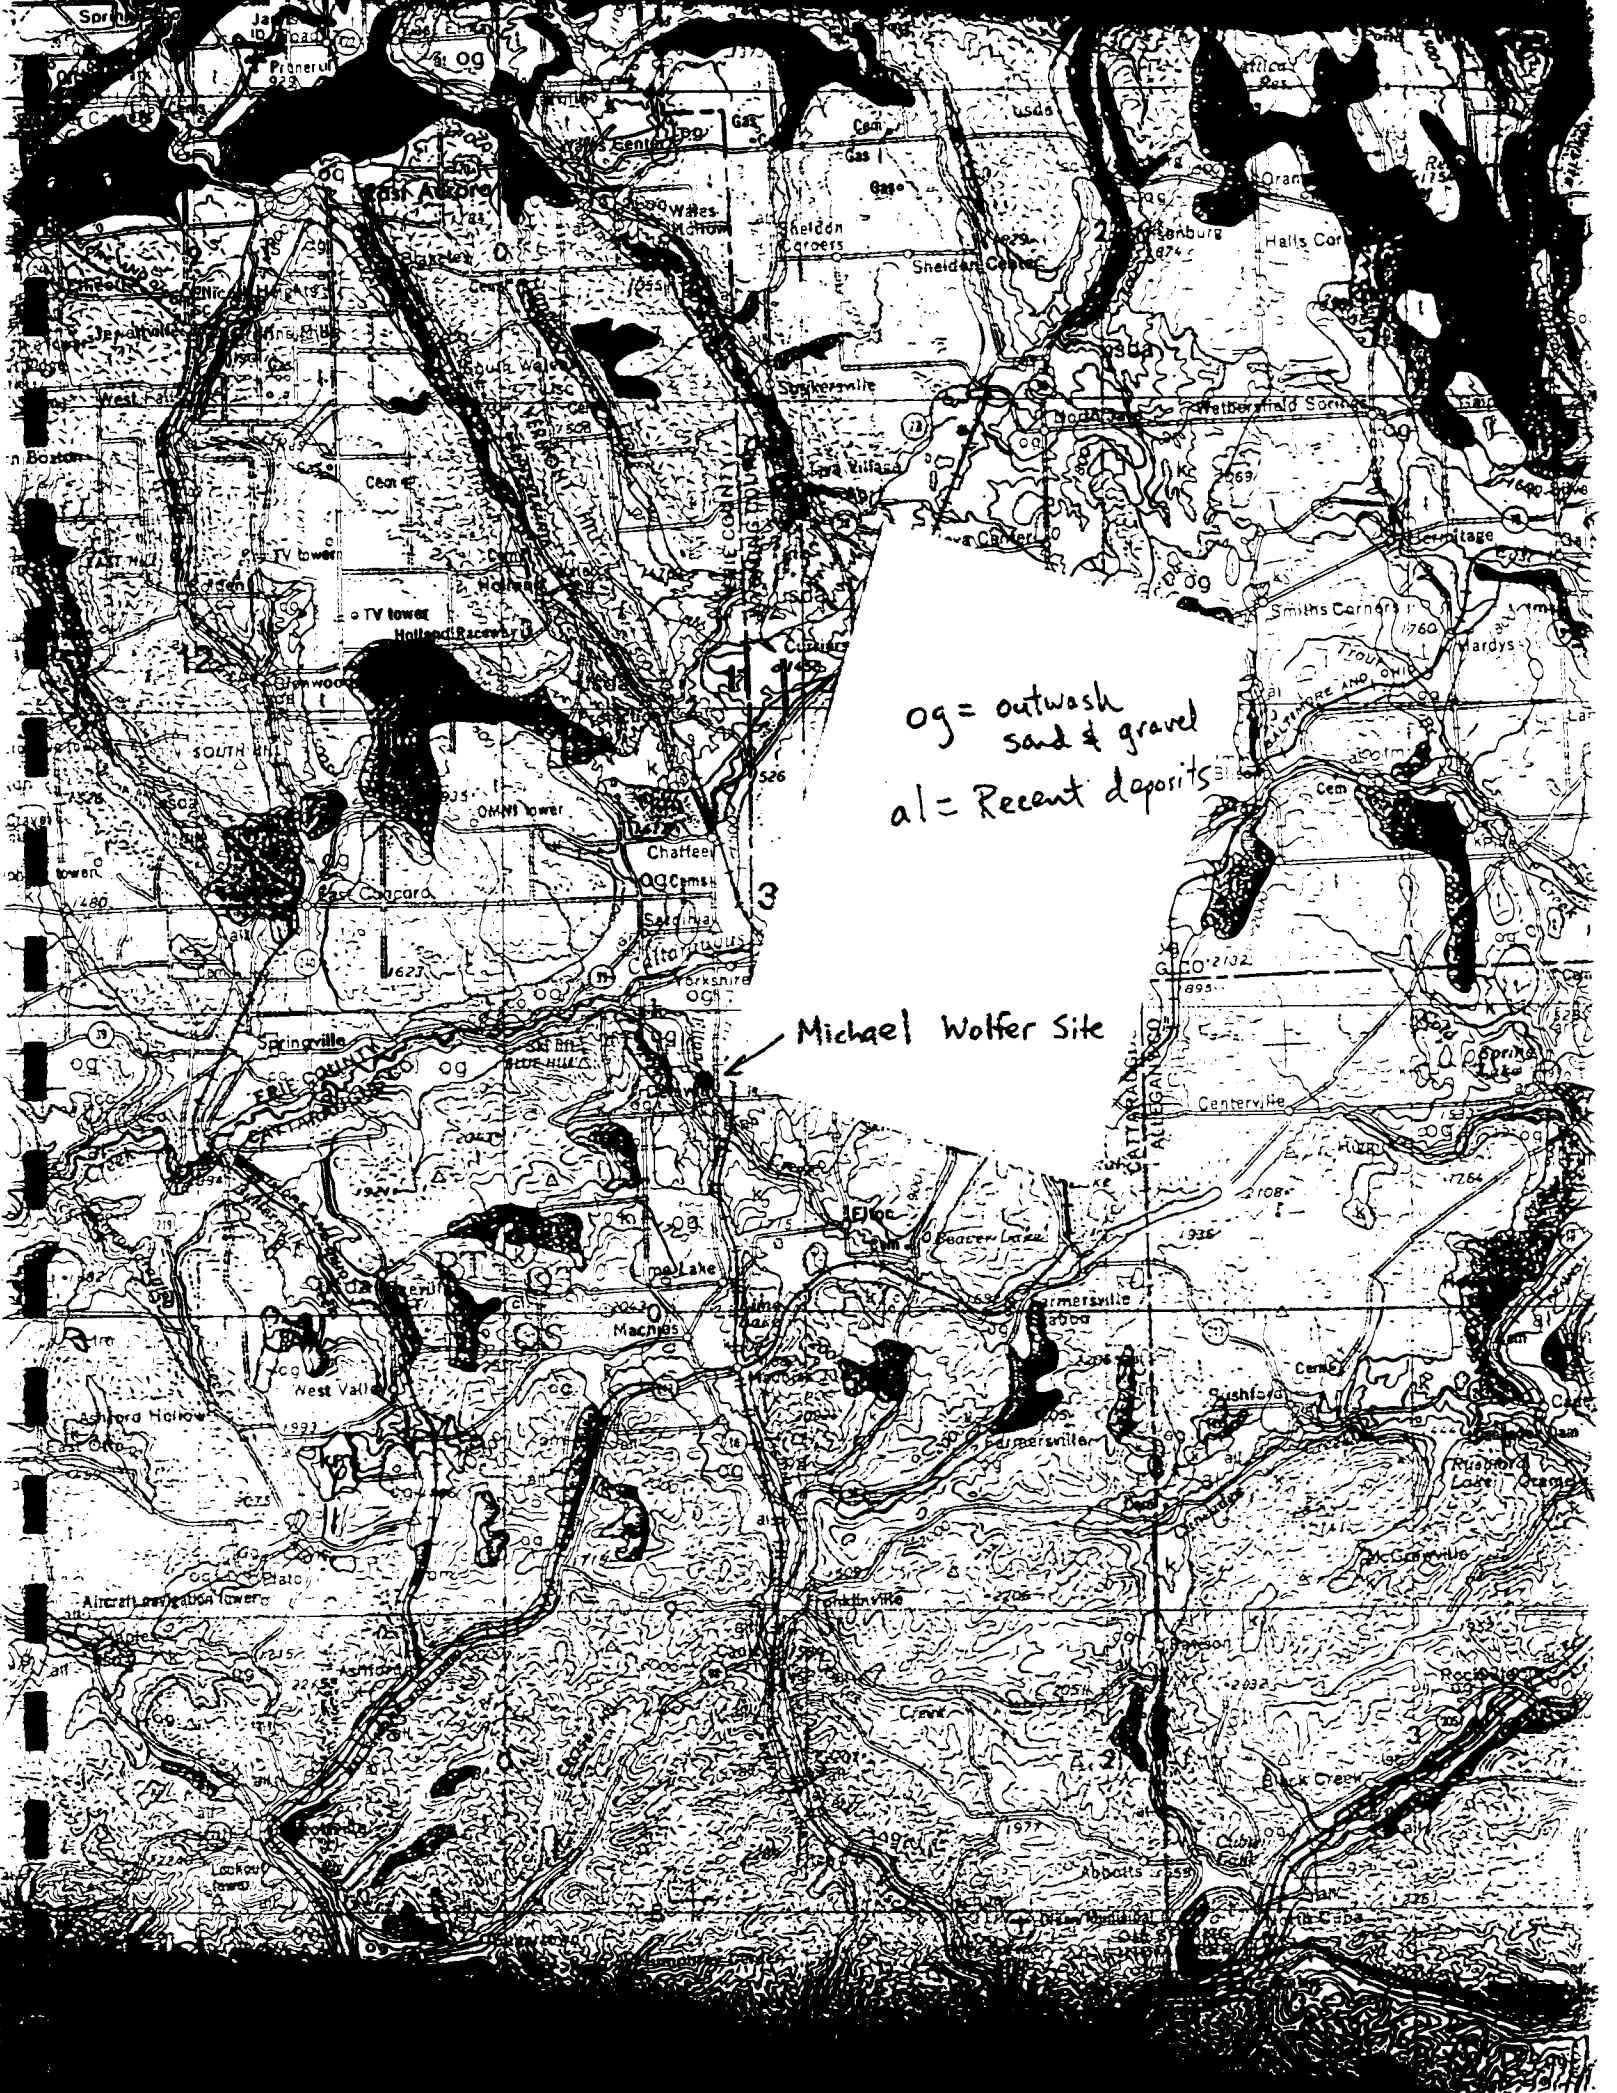



EXPLANATION

al — Recent deposits
Generally confined to floodplains within a valley, oxidized, non-calcareous, fine sand to gravel, in larger valleys may be overlain by silt, subject to frequent flooding, thickness 1-10 meters.

all — Alluvial fan
Fan shaped accumulations, poorly stratified silt, sand and boulders, at the foot of steep slopes, generally permeable.

co — Colluvium
Mixture of sediments, deposited by mass wasting, thickness generally 1-3 meters.

col — Colluvial fan
Fan shaped accumulation, mixture of sediments, at mouths of gulches, thickness generally 1-3 meters.

cd — Colluvial diamicton
Mixture of sediments, unique to region beyond Wisconsinan glacial limit, rebedded saprolite and glacial debris, may be old (Illinoian) drift, homogenized by varying degrees of colluviation, bedrock may sporadically crop out or be within 1-3 meters of the surface.

pm — Swamp deposits
Peat-muck, organic silt and sand in poorly drained areas, non-oxidized, may overlay marl and late silts, potential land instability, thickness generally 2-20 meters.

ls — Lacustrine beach
Generally well sorted sand and gravel, stratified, permeable and well drained, deposited at a lake shoreline, generally non-calcareous, may have wave-widened lag gravel, thickness variable (1-3 meters).

ld — Lacustrine delta
Coarse to fine gravel and sand, stratified, generally well sorted, deposited at a lake shoreline, thickness variable (3-15 meters).

lc — Lacustrine silt and clay
Generally laminated silt and clay, deposited in proglacial lakes, generally calcareous, potential land instability, thickness variable (up to 100 meters); stipple overprint where bedrock is within 1-3 meters of the surface.

ls — Lacustrine sand
Sand deposits associated with large bodies of water, generally a near-shore deposit or near a sand source, well sorted, stratified, generally quartz sand, thickness variable (2-20 meters).

og — Outwash sand and gravel
Coarse to fine gravel with sand, proglacial fluvial deposition, well rounded and stratified, generally finer texture away from ice border, may be caked beyond Wisconsinan glacial limit, thickness variable (2-20 meters).

fg — Fluvial gravel
Same as outwash sand and gravel, except deposition farther from glacier, age uncertain.

k — Kame deposits
Includes kames, eskers, kame terraces, kame deltas, coarse to fine gravel and/or sand, deposition adjacent to ice (if at ice margin, relief is below elevation of associated outwash), lateral variability in sorting, coarseness and thickness, may be caked beyond Wisconsinan glacial limit, thickness variable (10-30 meters).

usda — Undifferentiated stratified drift assemblage
Dominantly clay, silt and sand, limited gravel and diamicton, stratification includes undisturbed and deformed laminations, ice contact structures, lenticular, discontinuous bodies of gravel and flow till, may represent dead-ice, disintegration and local ice-contact lake deposits in ice-marginal and subglacial environments, thickness variable (3-30 meters).

kmo — Kame moraine
Variable texture (size and sorting) from boulders to sand, deposition at an ice margin during deglaciation, relief is above elevation of associated outwash.

Site	Name, Town
1	Otto Otto
2	Clear Creek Collins
3	Nichols Bk Sardinia
4	Winter Gulf N. Collins
5	Lewiston Lewiston
6	Malloy Newfane
7	Houghton Bog Springville
8	Byron Byron
9	Sheridan Forestville
10	Marilla E. Aurora
11	Protection Arcade
12	Colden Colden
13	The Gulf Lockport
14	Soyers Grovetland
15	Macaulay Site Geneseo
1.	Blackmo theas, S
2.	Buckley, Radocant
3.	Calkin, P York, Oh.
4.	Crane, H Supperm
5.	Hartage, male of N.
6.	Heubach v. 40, p. 3.
7.	Hollands, M.S. thes




- og
 og — Outwash sand and gravel
 Coarse to fine gravel with sand,
 proglacial fluvial deposition,
 well rounded and stratified,
 generally finer texture away from ice border.
 may be calcareous beyond Wisconsinan glacial limit,
 thickness variable (2-20 meters).
- tg
 tg — Fluvial gravel
 Same as outwash sand and gravel,
 except deposition farther from glacier,
 age uncertain.
- k
 k — Kame deposit
 Includes kames, eskers, kame terraces, kame deltas,
 coarse to fine gravel and/or sand,
 deposition adjacent to ice (if at ice margin, relief is below elevation of associated outwash),
 lateral variability in sorting, coarseness and thickness,
 may be calcareous beyond Wisconsinan glacial limit,
 thickness variable (10-30 meters).
- usda
 usda — Undifferentiated stratified drift assemblage
 Dominantly clay, silt and sand,
 limited gravel and diamiction,
 stratification includes undisturbed and deformed laminations,
 ice contact structures,
 lenticular, discontinuous bodies of gravel and flow till,
 may represent dead-ice, disintegration and local ice-contact lake deposits in ice-marginal and subglacial
 environments,
 thickness variable (3-30 meters).
- km — Kame moraine
 Variable texture (size and sorting) from boulders to sand,
 deposition at an ice margin during deglaciation,
 relief is above elevation of associated outwash,
 locally cemented with calcareous cement,
 thickness variable (10-30 meters).
- tm — Till moraine
 More variably sorted than till,
 generally more permeable than till,
 deposition adjacent to ice,
 more variably drained,
 may include ablation till,
 thickness variable (10-30 meters).
- t
 t — Till
 Variable texture (e.g. clay, silt-clay, boulder clay),
 usually poorly sorted diamict,
 deposition beneath glacier ice,
 relatively impermeable (loamy matrix),
 variable class content — ranging from abundant well-rounded diverse lithologies in valley tills to
 relatively angular, more limited lithologies in upland tills, tends to be sandy in areas underlain by gneiss
 or sandstone,
 potential land instability on steep slopes,
 thickness variable (5-30 meters).
- r — Bedrock
 Exposed or generally within 1 meter of the surface.
- Bedrock stipple overprint
 Bedrock may be within 1-3 meters of the surface,
 may sporadically crop out,
 variable mantle of rock debris and glacial till.

MAP SYMBOLS

- Contact
- Glacial meltwater channel
- Dated radiocarbon locality
- Esker

REFERENCE A-5

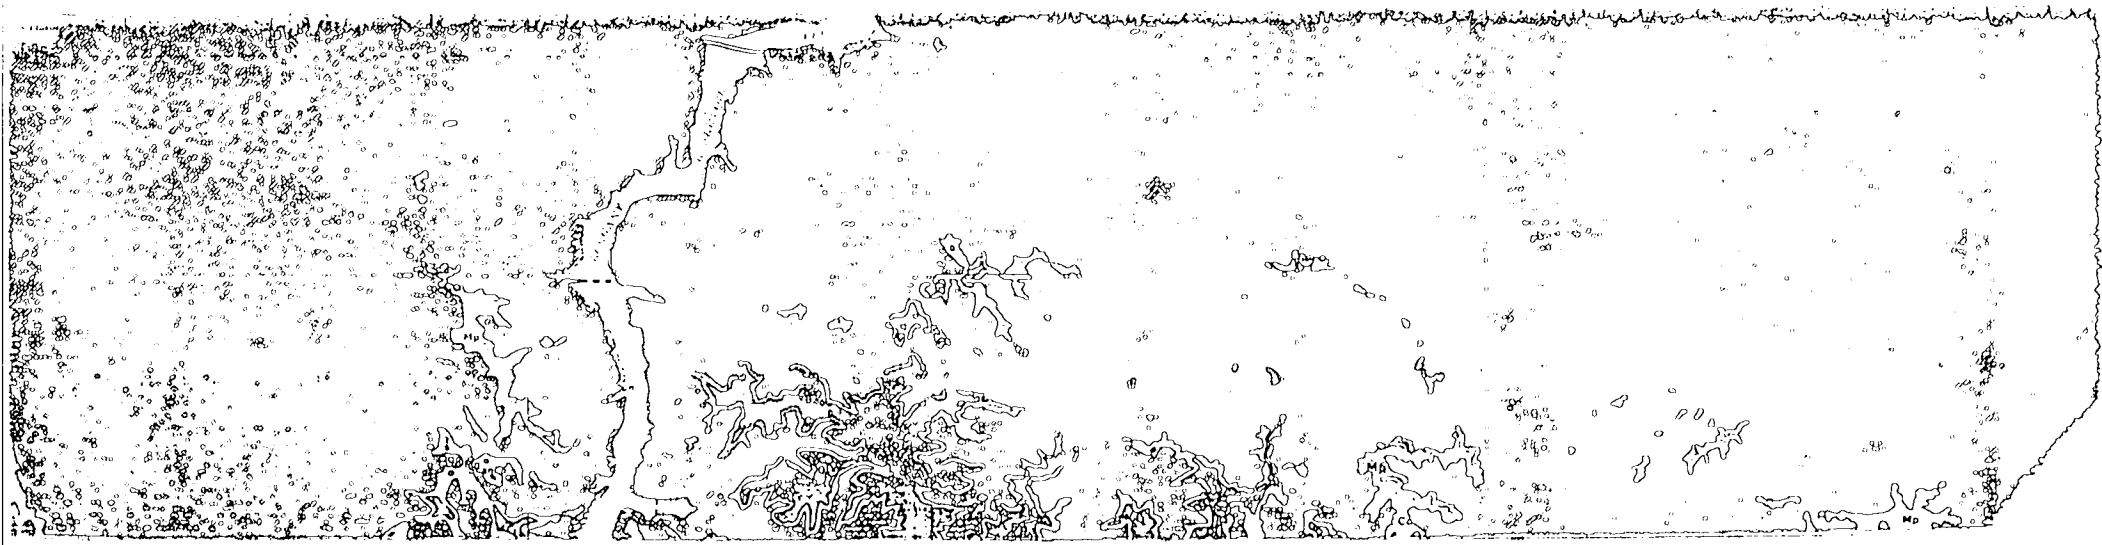


GEOLOGIC MAP OF NEW YORK


1970

Niagara Sheet

COMPILED AND EDITED BY
LAWRENCE V. MERRILL
DONALD E. TAYLOR
March, 1970

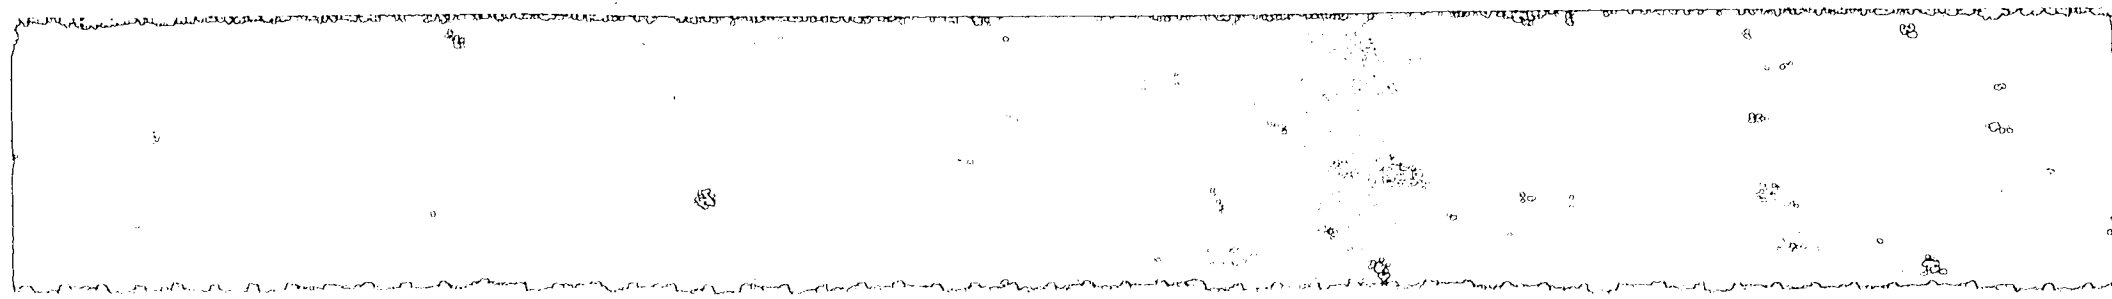

MICHAEL WOLFER SITE
Dcy = Machias Fm.

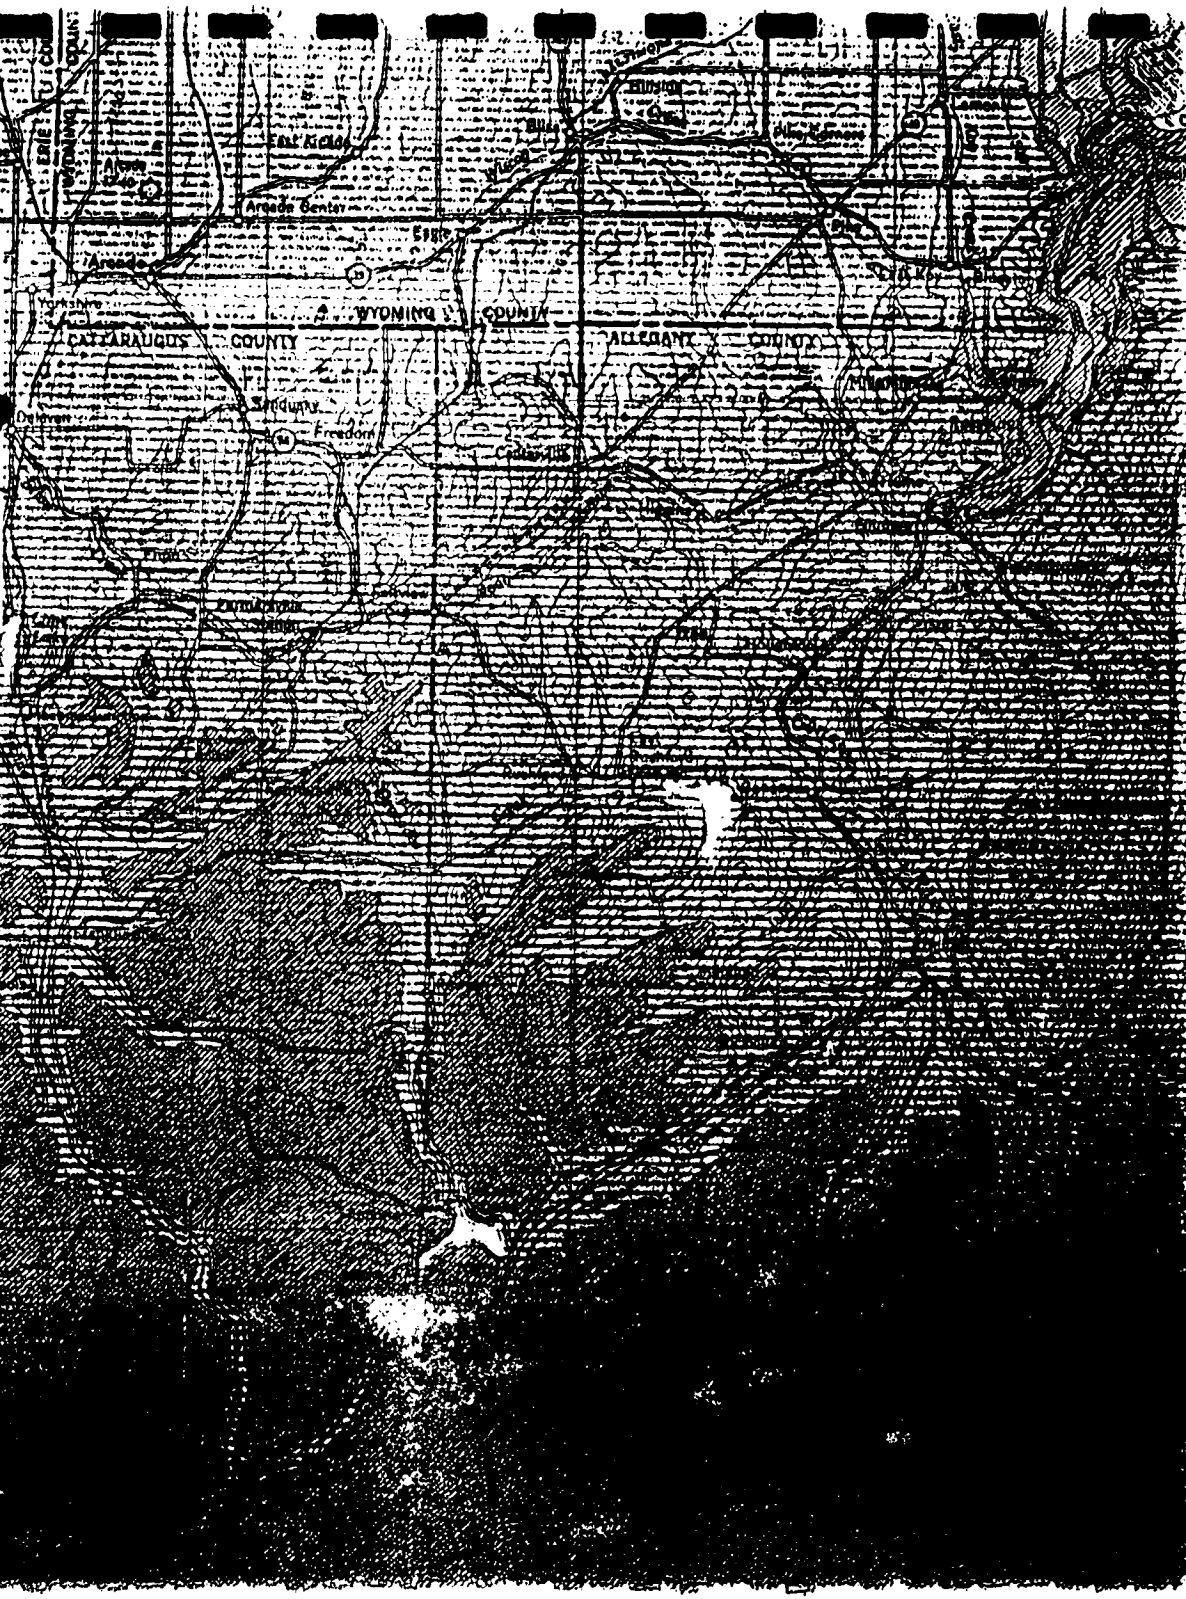

LEGEND


NOTE: Where the uniformity of lithology and availability of pattern combinations permit, the dominant lithology of a mapping unit is symbolized as follows:

Cross-hatch patterns:
rhombic grid—oolites
rectangular grid—limestones

Line patterns:
straight—pelitic rocks, shales, shales interbedded with siltstones and sandstones

Stipple patterns:
regular red—quartz sandstones and quartzites
random red—non-marine sedimentary rocks

An irregular lower margin on the "color boxes" signifies that the unit has an unconformable relationship with subjacent units, however not necessarily with the next unit listed. Wavy lines signify parallel unconformities, sawtooth lines signify angular unconformities.

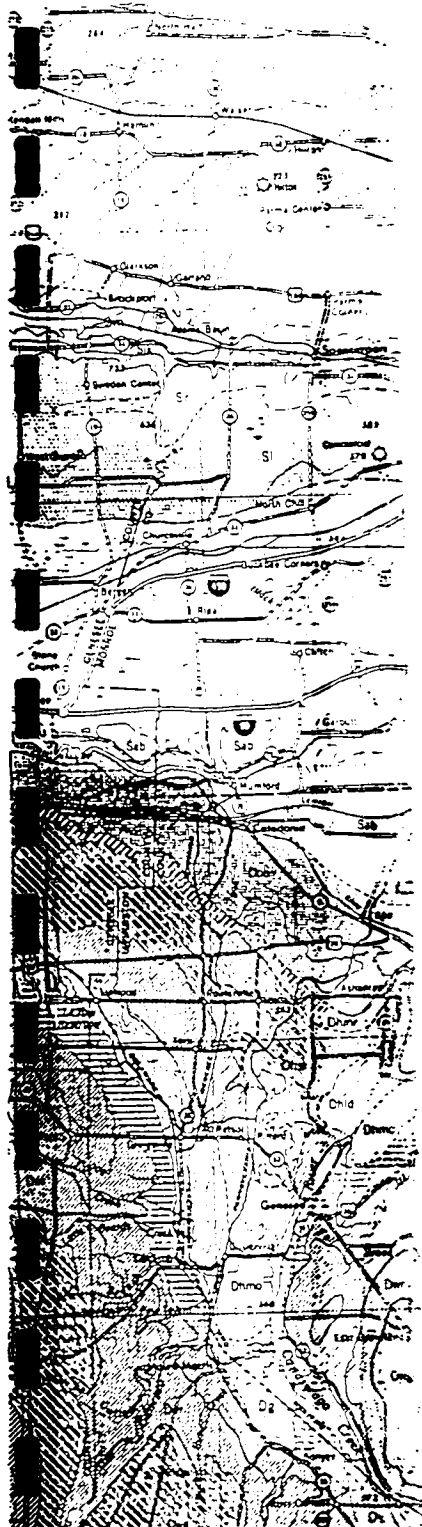


Lower
Mississippian
Pennsylvanian

Upper Devonian


PALEOZOIC

Middle Devonian

Carboniferous




POTTSVILLE GROUP
Connoquenessing Formation—sandstone, shale; Slick
on Formation—shale, sandstone, conglomerate; Dean
Conglomerate 50-100 ft. (15-30 m.)



PICOHO GROUP
Cuyahoga Formation—shale, sandstone; Corey Sand-
stone; Knapp Formation 60-100 ft. (20-30 m.)—
shale, conglomerate




CONEWANGO GROUP
450-650 ft. (140-200 m.)
Oswayo and Venango Formations—shale, siltstone;
sandstone, replaced eastwardly by Cattaraugus For-
mation—shale, sandstone, conglomerate.




CONNEAUT GROUP
250-600 ft. (75-200 m.)
In west, bilkott and Dexterville Formations—shale,
siltstone.
In east, Germania Formation—shale, sandstone;
Whitesville Formation—shale, sandstone; Mansdale
Sandstone; Wellsville Formation—shale, sandstone;
Cuba Sandstone.




CANADAWAY GROUP
700-1200 ft. (210-370 m.)
Northeast Shale; Staunton Siltstone;
Westfield Shale; Leona Siltstone;
Cawanga, South Wales, and Dunkirk Shales;
Machus Formation—shale, siltstone; Rushford
Sandstone; Canada, Canada, and Hume Shales;
Catasara Sandstone; South Wales, and Dunkirk
Shales.




JAVA GROUP
100-200 ft. (30-60 m.)
Hanover Shale; Wiscoy Formation—sandstone, shale;
Pipe Creek Shale




WEST FALLS GROUP
400-950 ft. (120-290 m.)
Angola and Rhinestreet Shales;
Nunda Formation—sandstone, shale;
West Hill and Gardeau Formations—shale, siltstone;
Rorick, Glen Shale, upper Beers Hill Shale; Grimes
Siltstone;
lower Beers Hill Shale; Dunn Hill, Milford, and
Moreland Shales




SONYEA GROUP
50-200 ft. (15-60 m.)
Cushawaga and Middlesex Shales




GENESSE GROUP
20-150 ft. (3-45 m.)
West River Shale; Genesee Limestone; Penn Yan
and Venesee Shales; North Evans Limestone



HAMILTON GROUP
200-500 ft. (60-150 m.)
Moscow Formation—Windom and Washong Shales;
Mentain Limestone Members;
Ludlowville Formation—Geop Run Shale; Tonawanda
Limestone; Waukegan and Leeward Shales; Center
Field Limestone Members;
Skaneateles Formation—Levanna Shale; Stafford
Limestone Members;
Marengo Formation—Catskill Shale Mem.



ONDAGA AND BOIS BLANC LIMESTONE
150 ft. (45 m.)
In New York: Onondaga Limestone—Seneca, Mills
house, Liberty, and Clarence Limestone Members;
Edgehill, Cheny Limestone Member; local coral
bioherms; Bois Blanc Limestone—Seneca (this is
continued...)
In Ontario: Dundee Limestone; Lucas Formation—
Seneca Limestone; Seneca; Amherstburg; etc.

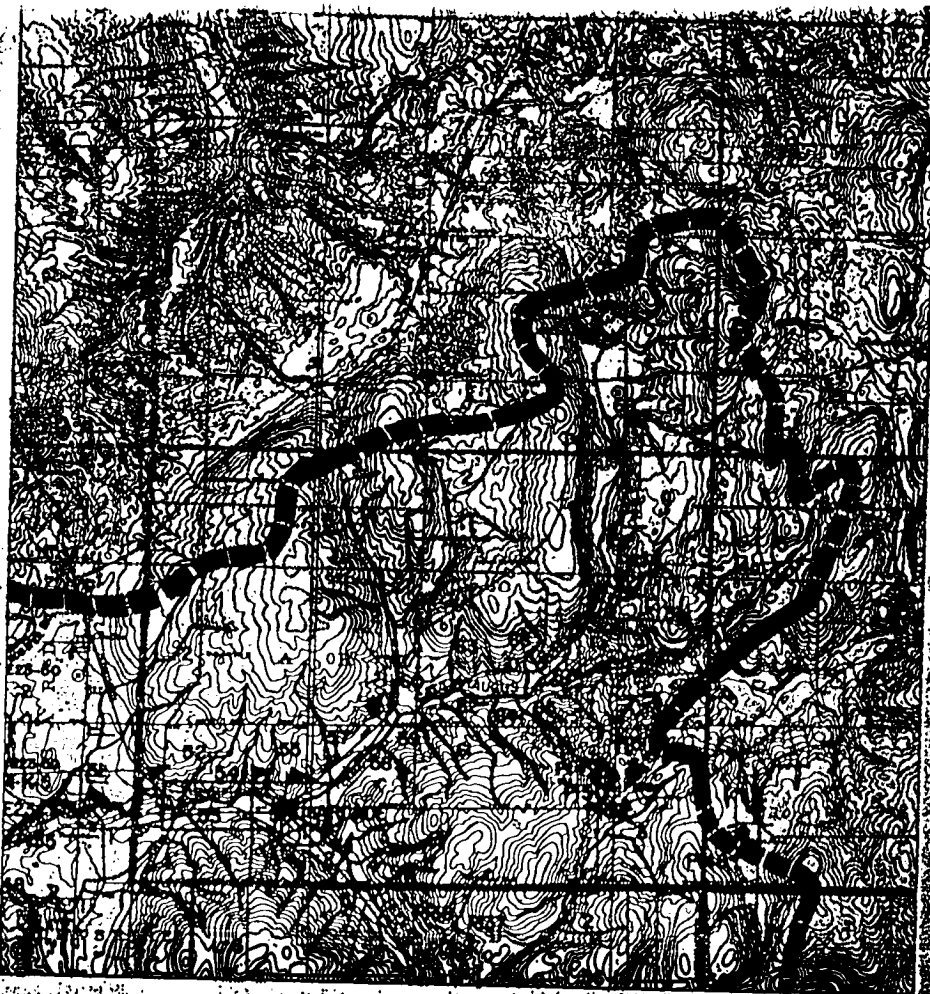

SCALE IN MILES

1/2 0

MAP K-6

1698 CN 10-15-66

REFERENCE A-6



RECRA ENVIRONMENTAL, INC.

Chemical Waste Analysis, Prevention and Control

3/6422

PRELIMINARY SITE CHARACTERIZATION

MICHAEL WOLFER
NYSDEC NO. 905020

DRAFT

Prepared For:

Motorola Inc.
1303 Algonquin Road
Schaumburg, IL 60196

Prepared By:

Recra Environmental, Inc.
Audubon Business Centre
10 Hazelwood Drive, Suite No. 106
Amherst, NY 14150

RECEIVED

November, 1987

REFERENCE A-7

ENGINEERING INVESTIGATIONS AT INACTIVE HAZARDOUS WASTE SITES

PHASE I INVESTIGATION

**MICHAEL WOLFER, SITE NUMBER 905020
VILLAGE OF DELEVAN, CATTARAUGUS COUNTY**

February 1990



Prepared for:

**New York State Department
of Environmental Conservation**

50 Wolf Road, Albany, New York 12233

Thomas C. Jorling, Commissioner

Division of Hazardous Waste Remediation

Michael J. O'Toole, Jr., P.E., Director

Prepared by:

Ecology and Environment Engineering, P.C.

REFERENCE A-8

STATE OF NEW YORK

OFFICIAL COMPILATION

OF

CODES, RULES AND REGULATIONS

MARIO M. CUOMO
Governor

GAIL S. SHAFFER
Secretary of State

Published by
DEPARTMENT OF STATE
162 Washington Avenue
Albany, New York 12231

TABLE I (cont'd)

Item No.	Waters Index Number	Name	Description	Map Ref. No.	Class	Standards
115	E 23-48 portion	Elton Creek	From trib. 3 to trib. 6	L-6	C	C(T)
116	E 23-48 portion	Elton Creek	From trib. 6 to trib. 15.	L-6	C	C(T)
117	E 23-48 portion	Elton Creek	From trib. 15 to source.	L-6	C	C(T)
118	E 23-23-1	Stony Creek	From mouth to source.	K-5 L-5	C	C(TS)
119	E 23-48-1-1, 2 3	Tributaries of Stony Creek		K-5	D	D
120	E 23-48-2 portion	Tributary of Elton Creek	Mouth to trib. 1.	K-6	C	C(T)
121	E 23-48-2 portion	Tributary of Elton Creek	From trib. 1 to source.	K-6 L-6	D	D
122	E 23-48-2-1 portion	Tributary of tributary of Elton Creek	Mouth to point 0.7 mile up- stream from mouth.	K-6	C	C(T)
123	E 23-48-2-1	Tributary of tributary of Elton Creek	From 0.7 mile upstream from mouth to source.	K-6	D	D
124	E 23-48-2-1-1	Tributary of tributary of tributary of Elton Creek		K-6	D	D

TABLE I (cont'd)

Item No.	Waters Index Number	Name	Description	Map Ref. No.	Class	Standards
125	E 23-48-2-2 and tribs., 3	Tributary of trib. 2 of Elton Creek		L-6	D	D
126	E 23-48-3 portion including P 127	Lime Lake Outlet	Mouth to P 127.	L-6	C	C(TS)
127	E 23-48-3	Lime Lake Outlet	From P 127 to P 130 (Lime Lake).	L-6	C	C(TS)
128	E 23-48-3-1	Tributary of Lime Lake Outlet		L-6	C	C(T)
129	E 23-48-3-1-1	Tributary of trib. 1 of Lime Lake Outlet		L-6	D	
130	E 23-48-3-2	McKinstry Creek		L-5		
131	E 23-48-3-2-1a	Tributary of McKinstry Creek				
132	E 23-48-3-2-1 and tribs.	Tributary of McKinstry Creek				

5 838.6

TITLE 8 CONSERVATION

CHAPTER X DIVISION OF SOURCES

5 838.6

C(TS)

116	E 23-48 portion	Elton Creek	From trib. 6 to trib. 15.	L-6	C	C(T)
117	E 23-48 portion	Elton Creek	From trib. 15 to source.	L-6	C	C(T)
118	E 23-28-1	Stony Creek	From mouth to source.	K-5 L-5	C	C(TS)
119	E 23-48-1-1, 2 3	Tributaries of Stony Creek		K-5	D	D
120	E 23-48-2 portion	Tributary of Elton Creek	Mouth to trib. 1.	K-6	C	C(T)
121	E 23-48-2 portion	Tributary of Elton Creek	From trib. 1 to source.	K-6 L-6	D	D
122	E 23-48-2-1 portion	Tributary of tributary of Elton Creek	Mouth to point 0.7 mile up- stream from mouth.	K-6	C	C(T)
123	E 23-48-2-1	Tributary of tributary of Elton Creek	From 0.7 mile upstream from mouth to source.	K-6	D	D
124	E 23-48-2-1-1	Tributary of tributary of tributary of Elton Creek		K-6	D	D

TABLE I (cont'd)

Item No.	Waters Index Number	Name	Description	Map Ref. No.	Class	Standards
				L-6	D	D
125	E 23-48-2-2 and tribs., 3	Tributary of trib. 2 of Elton Creek		L-6	C	C(TS)
126	E 23-48-3 portion including P 127	Lime Lake Outlet	Mouth to P 127.	L-6	C	C(TS)
127	E 23-48-3	Lime Lake Outlet	From P 127 to P 130 (Lime Lake).	L-6	C	C(T)
128	E 23-48-3-1.	Tributary of Lime Lake Outlet		L-6	D	D
129	E 23-48-3-1-1	Tributary of trib. 1 of Lime Lake Outlet		L-5 L-6	C	C(TS)
130	E 23-48-3-2	McKinstry Creek		L-6	D	D
131	E 23-48-3-2-1a	Tributary of McKinstry Creek		L-5 L-6	C	C(T)
132	E 23-48-3-2-1 and tribs.	Tributary of McKinstry Creek		L-5	C	C(T)
133	E 23-48-3-2-2, 3, 4	Tributaries of McKinstry Creek		L-6	D	D
134	E 23-48-3-P 128, P 129	Unnamed ponds				

Item No.	Waters Index Number	Name	Description	Map Ref. No.	Class	Stand.
100	E 23-32-P 117	Unnamed pond		K-5sw	B	
101	E 23-32-3 and trib.	Tributary of Spring Brook		K-5sw	D	
102	E 23-32-P 118	East Concord Pond		K-5sw	D	
103	E 23-32-4 including P 118a through P 118c	Tributary of Spring Brook		K-5sw	C	
104	E 23-32-P 118d through P 118h	Unnamed ponds		K-5sw	D	
105	E 23-33 portion	Buttermilk Creek	Mouth to tributary 7	L-5	D	
105.1	E-23-33 portion	Buttermilk Creek	From tributary 7 upstream 1.0 mile	L-5	C	
105.2	E-23-33 portion	Buttermilk Creek	From 1.0 mile upstream of trib. 7 to source	L-5	D	
106	E 23-33-1 and trib., 2 and trib., 3, 4 and trib., 6 and trib., 6a	Tributaries of Buttermilk Creek		L-5	D	
106.1	E-23-33-5	Gooseneck Creek	Mouth to source	L-5	C	
106.2	E-23-33-5-1, 2 and trib., 3	Trib. of Gooseneck Creek		L-5	D	
107	E 23-33-7 and trib.	Indian Creek		L-5	C	

TABLE I (cont'd)

Item No.	Waters Index Number	Name	Description	Map Ref. No.	Class	Stand.
108	E 23-P 118i	Unnamed pond		K-5sw	D	D
109	E 23-34	Stony Brook		L-5	D	D
110	E-23-34a	Tributary of Cattaraugus Creek	Mouth to source (P123)	L-5 K-5sw	C	C(TS)
110.1	E-23-34a-P119, P119a, P119b, P119c, P121, P122	Unnamed Ponds		K-5sw	D	D
111	E 23-34-P 123	Peterson's Pond		K-5sw	B	B
112	E 23-34a-P 124, P 125, P 125a, P 125b, P 126	Unnamed group of ponds		K-5sw	D	D
113	E 23-35 and trib., including P 126a through P 126k, 36 and trib., 37 and trib., including P 126L through P 126n, 38, 38a, 39, 40, 41, 42, 43, 44 and trib., 45, 46, 47	Tributaries of Cattaraugus Creek		K-5 L-5 K-5sw	D	D
114	E 23-48 portion	Elton Creek	Mouth to trib. 3.	K-5 K-6 L-6	C	C(TS)


FRANKLINVILLE



SCALE IN MILES
1/2 0

MAP L-6

REFERENCE A-9

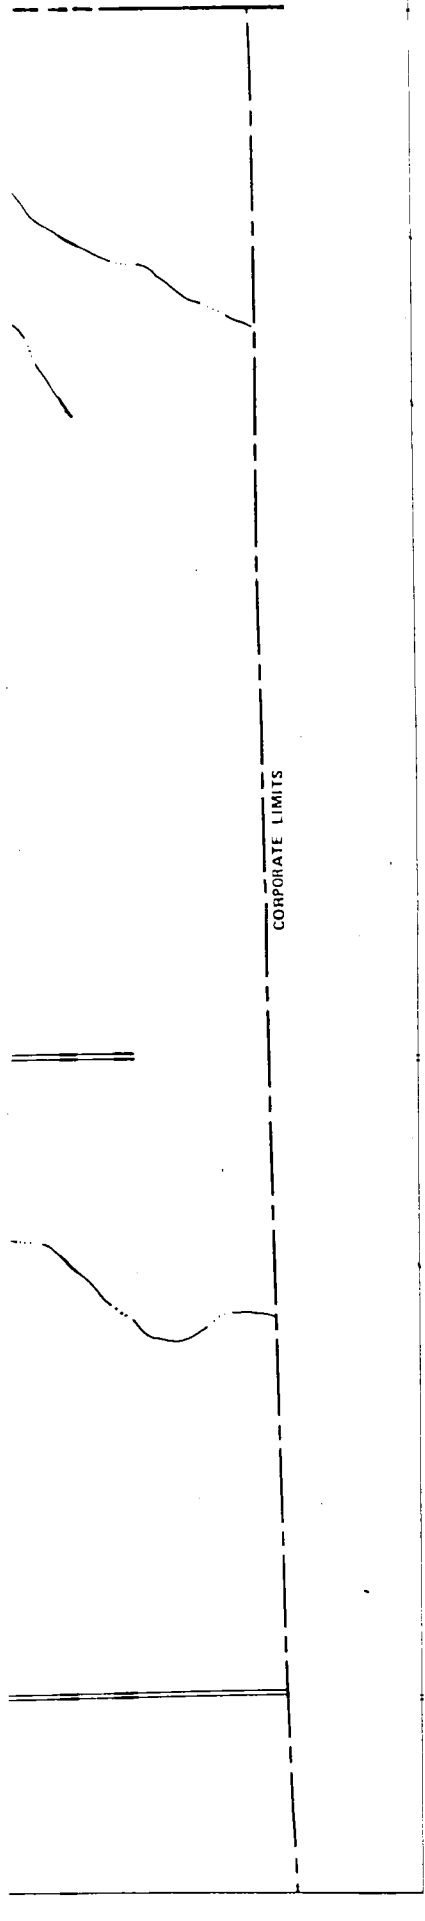

CORPORATE LIMITS

INITIAL IDENTIFICATION:

APRIL 11, 1975

FLOOD HAZARD BOUNDARY MAP REVISIONS:

DECEMBER 16, 1977

FLOOD INSURANCE RATE MAP EFFECTIVE:

MAY 25, 1984

FLOOD INSURANCE RATE MAP REVISIONS:

Refer to the FLOOD INSURANCE RATE MAP EFFECTIVE date shown on this map to determine when actuarial rates apply to structures in the zones where elevations or depths have been established.

To determine if flood insurance is available in this community contact your insurance agent, or call the National Flood Insurance Program, at (800) 638-6620.



APPROXIMATE SCALE



NATIONAL FLOOD INSURANCE PROGRAM

FIRM
FLOOD INSURANCE RATE MAP

TOWN OF
YORKSHIRE, NEW YORK
CATTARAUGUS COUNTY

PANEL 2 OF 4
(SEE MAP INDEX FOR PANELS NOT PRINTED)

COMMUNITY-PANEL NUMBER
361104 0002 B

EFFECTIVE DATE:
MAY 25, 1984



Federal Emergency Management Agency

ZONE C



ZONE C

Zone Designations*

Base Flood Elevation Line
With Elevation in Feet**

57.3

Base Flood Elevation in Feet
Where Uniform Within Zone**

1EL 9871

Elevation Reference Mark

RM7x

Zone D Boundary

River Mile

M1.5

**Referenced to the National Geodetic Vertical Datum of 1929

*EXPLANATION OF ZONE DESIGNATIONS

A flood insurance map displays the zone designations for a community according to areas of designated flood hazards. The zone designations used by FEMA are:

ZONE	EXPLANATION
A	Areas of 100-year flood; base flood elevations and flood hazard factors not determined.
AD	Areas of 100-year shallow flooding where depths are between one (1) and three (3) feet; average depths of inundation are shown, but no flood hazard factors are determined.
AH	Areas of 100-year shallow flooding where depths are between one (1) and three (3) feet; base flood elevations are shown, but no flood hazard factors are determined.
A1-A30	Areas of 100-year flood; base flood elevations and flood hazard factors determined.
A99	Areas of 100-year flood to be protected by flood protection system under construction; base flood elevations and flood hazard factors not determined.
B	Areas between limits of the 100-year flood and 500-year flood; or certain areas subject to 100-year flooding with average depths less than one (1) foot or where the contributing drainage area is less than one square mile; or areas protected by levees from the base flood. (Medium shading)
C	Areas of minimal flooding. (No shading)
D	Areas of undetermined, but possible, flood hazards.
V	Areas of 100-year coastal flood with velocity (wave action); base flood elevations and flood hazard factors not determined.
V1-V30	Areas of 100-year coastal flood with velocity (wave action); base flood elevations and flood hazard factors determined.

NOTES TO USER

Certain areas not in the special flood hazard areas (zones A and V) may be protected by flood control structures.

This map is for flood insurance purposes only; it does not necessarily show all areas subject to flooding in the community or all planimetric features outside special flood hazard areas.

INITIAL IDENTIFICATION:

APRIL 11, 1975


FLOOD HAZARD BOUNDARY MAP REVISIONS:

DECEMBER 18, 1977

FLOOD INSURANCE RATE MAP EFFECTIVE:

MAY 25, 1984

FLOOD INSURANCE RATE MAP REVISIONS:

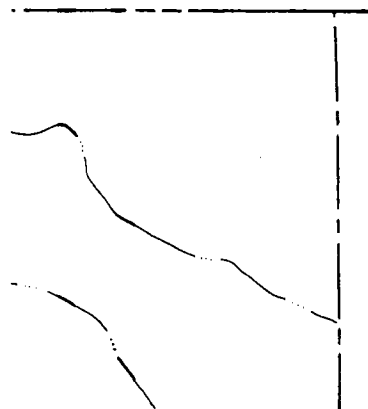

ATE LIMITS


Refer to the FLOOD INSURANCE RATE MAP EFFECTIVE date shown on this map to determine when actuarial rates apply to structures in the zones where elevations or depths have been established.

To determine if flood insurance is available in this community contact your insurance agent, or call the National Flood Insurance Program, at (800) 638-6620.



APPROXIMATE SCALE

800 0 800 FEET

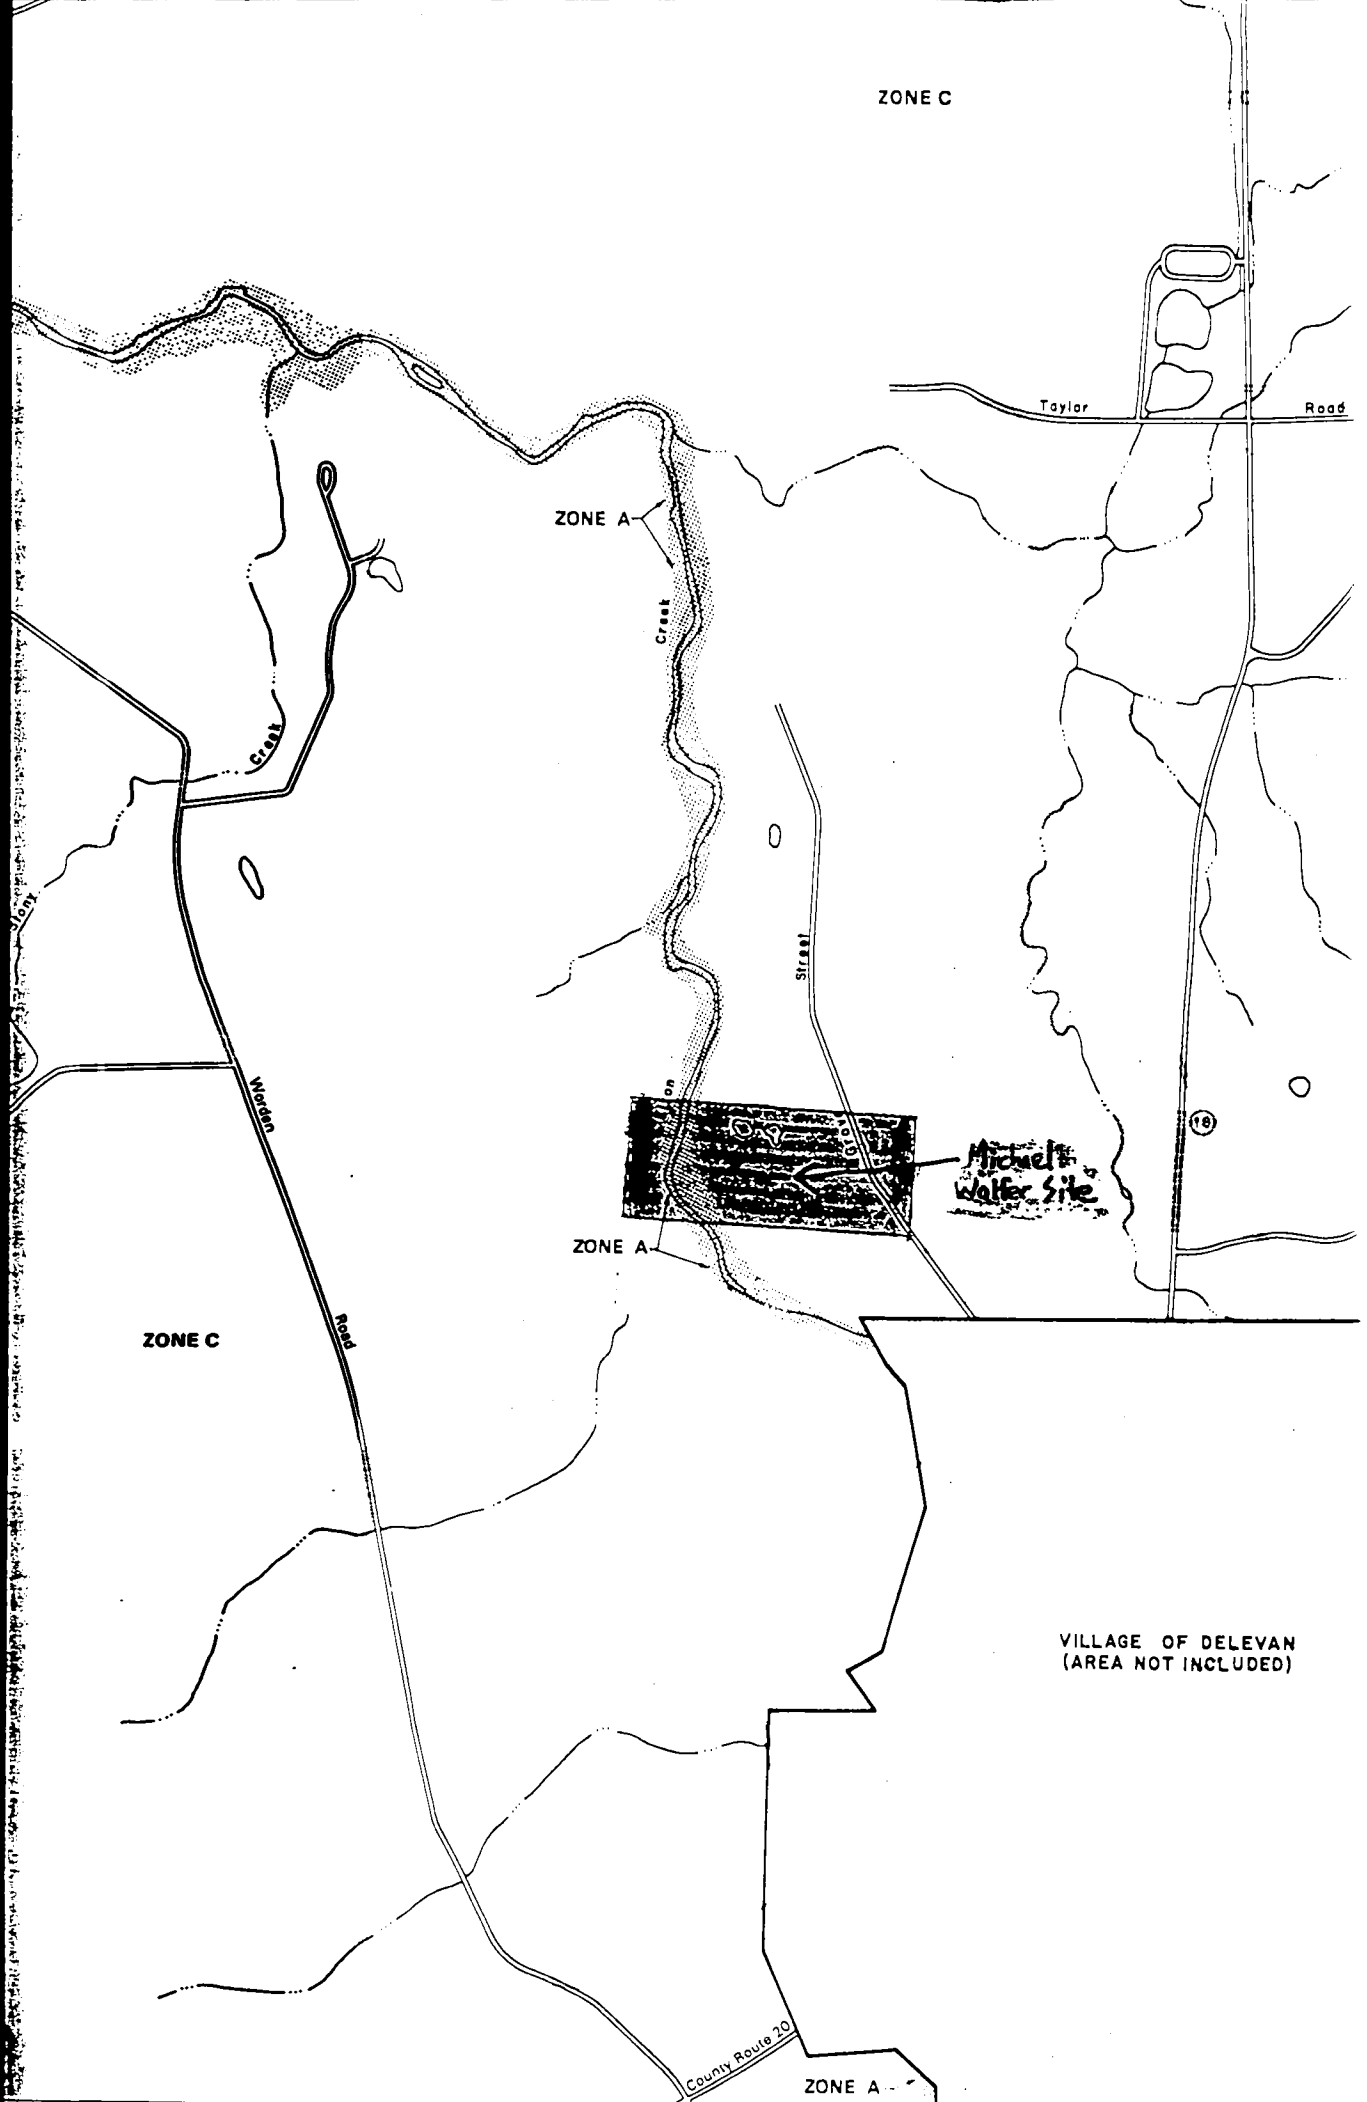

ZONE C

Taylor Road

ZONE A

Creek

Creek

Street

Michael Walter Site

18

ZONE A

ZONE C

Western Road

VILLAGE OF DELEVAN
(AREA NOT INCLUDED)

County Route 20

ZONE A

SECTION 2

DOCUMENTS CITED

LIST OF DOCUMENTS CITED

- B-1 Cattaraugus County Department of Health Correspondence
- B-2 New York State Department of Environmental Conservation Correspondence

DOCUMENT B-1

Jack McMahon, DEC - BRO

October 3, 1978

Chester Halgas

Motorola Industrial Waste Disposal

The following is a report on our activities concerning the subject waste from the Motorola plant in Arcade which found its way to various locations in north-eastern Cattaraugus County.

On September 19, 1978, Mr. Dan Pascarella of our office observed 97 drums on the old Machias Town sanitary landfill site. He investigated the matter and wrote the attached report which was referred to Kevin Hintz of your Department. On or about September 25th, Mr. Reisner of this office brought to my attention that more drums were in the area. I then contacted Mr. George Wyllie, chief industrial engineer at Motorola, to more specifically determine the nature of the wastes.

Through subsequent field investigations by Messrs. Pascarella and Reisner, it was determined by September 29, 1978, that approximately 2500 drums of industrial waste from Motorola had been placed in Cattaraugus County by three unregistered waste haulers at the following locations.

Prior to May of 1976, apparently all of the wastes had been hauled by Community Disposal Services to their landfill in Erie County. At that time, they went out of business and waste was then hauled by William Ballard, Osmon Road, Freedom Town, Cattaraugus County (492-2113) from May 1976 to May of 1977. During that time, he took approximately 1,000 drums which were given to the Preivity Auto Wrecking yard on Galen Hill Road, Freedom Town, which is located approximately $\frac{1}{2}$ mile south from the intersection with Route #98. All of these drums had been emptied by Mr. Preivity on his property. He has a private well for his house and business on the property. No other water supplies are in the immediate area, and it is doubtful if any appreciable amount of waste found its way into Clear Creek, a protected trout stream, approximately $\frac{1}{2}$ mile to the north of the dumping site. Reportedly, the waste materials were used to oil roads, and the drums were used to support junk cars.

From May 1977 to March 1978, approximately 1,000 drums were taken by a Donald Tillinghast, 18 Yacht Club Drive, Machias (353-8826) to the following locations: From May to winter, approximately 600-800 drums were deposited at Tidde's Junkyard on County Road #72, several hundred yards west of the Big N Plaza at Yorkshire Corners. Mr. Tidde's reported that he gave away approximately 100 of these drums which are unaccounted for except for 20 which went to Michael Wolfer in Delevan. Approximately 50% of the drums at Tidde's Junkyard had been spilled or opened and a considerable amount of spillage exists on the property. Nearby residences and businesses are served by the Yorkshire Town public water supply, and there appears to be no threat from a water supply standpoint. The site of the drums is very flat and it is doubtful if appreciable amounts of the waste got into Cattaraugus Creek which is approximately $\frac{1}{2}$ mile away. Apparently the winter weather precluded dumping of the drums at Tidde's Junkyard and reportedly Mr. Tillinghast gave 20 drums to Camp Arrowhead on Route #16, Yorkshire Town, which were later buried. He also gave approximately 100 drums to Norman Rogers who used them for fill on his property, approximately $\frac{1}{2}$ mile east of the Village of Delevan on California Road. 13 drums were given to Terwilliger Excavation in Franklinville which are still intact, and 13 drums were dumped on the Boehmer property on Route #16, Machias, directly across

and approximately 225' distant from the new Town of Machias and County Infirmary well. At the Bouinier site, more than half of the drums had been spilled. It is further reported that some unknown quantity of drums were dumped and covered in a ravine on the south side of Route #242 just west of its junction with Route #16. In addition, 97 drums had been dumped at the aforementioned Machias landfill site, which is no longer in operation there. A number of the drums had been spilled and significant amount of spilled wastes are on the site. Fortunately, except for the 20 drums mentioned above, no other water supplies appear to be possibly affected, and the aforementioned spillages are not in locations where appreciable overland flow of the wastes to streams would occur.

From March 1978 to the end of September when Motorola discontinued allowing private haulers to take these wastes, approximately 600 drums were taken by a Dan Griswold, Reynolds Road, Franklinville (676-2403) to the Town of Machias gravel pit on Very Road, located approximately one mile south of the intersection of Very Road and County Road #16, which is slightly more than two miles directly west of the hamlet of Machias. At this location, approximately one-half of the drums had been emptied, and it is reported that the Town of Machias used these waste material in oiling some of the Town roads. However, we have been unable to verify this report, and the Town Supervisor has stated that she knew nothing of the storage or the use of this material.

On Thursday, September 28th, the writer toured several of the sites with Messrs. Vought and Wylie of Motorola and Mr. Reiser of this office. The Motorola representatives indicated that most, if not all, of the drums came from their plant. The drums are mainly identified by the product that they contained when they were shipped to Motorola and are largely characterized by the names of the chemicals, e.g. Magnolia Chemical, chloroethane, freon, etc. The newer drums have waste labels affixed to them by Motorola.

Motorola uses the following products which may in some part be discarded as industrial waste: Machining oils (Hamidraw D21-HV, GM Industries Limited 991, and HM 1301 DC), epoxies, epoxy solvent (Dibutylphthalate), flux, flux thinner (Alpha Metals 810), degreasers, polyurethane varnishes, Toluene, Xylene, Freon, dilute hydrochloric acid, metal grindings and metal. Motorola is to prepare a report stating the relative amounts of these products which may find their way into the industrial waste.

Investigation with suppliers and manufacturers revealed that many of the products are proprietary and that the exact content was not revealed to Motorola. The contents as reported by the suppliers and manufacturers are:

Hamidraw D21-HV - Harry Miller Corp., Philadelphia, PA (215-324-4000). Sulfanated petroleum oil 19.6% by weight; petroleum oil, 19.4%; chlorinated petroleum wax, 4.5%; lead tallate solution, 19.7% (75% kerosene and 25% lead tallate. % lead in lead tallate is 42%); Butyl Carbitol, 3% (the solution has a pH of 9.5 and the manufacturer advises handling with care. D21-HV is used in its undiluted form and also a 50% dilution with water at Motorola.

HM 1301 DC is also made by Harry Miller Corp. and contains: Mineral oil, 65%; sodium petroleum sulfonate, 14%; lead tallate, 19%; ethyloxylated alcohol, 2%.

October 3, 1978

The epoxy formulations used were obtained from a previous supplier, Hysol of Olean, New York, who reports that the epoxy resin is approximately a 400 molecular weight diglycidyl ether of bisphenol A plus 5% cresyl glycidyl ether. The hardener is a polyoxypropylene diamine.

The machine oil 991 supplied by GM Industries Limited in Tonawanda (693-6050) consists of the following: Tall oil, 10%; polysperm oil, 3%; sodium petroleum sulfonates, 7%; stearic acid, .3%; triethanolamine, 4.5%; hexylene glycol, 4%; Union Carbide U con LB 65, 2% (a proprietary compound which is a poly alkaline glycol); plant oil, .5%; emulsifier, .5%; chlorinated paraffin wax, 2%; petroleum oil, 15%; tetrasodium EDTA, .75%; biocide solution, 1.4% (solution of 18.5% 2', dihydroxy; 5' 5' dichloro-diphenyl methane, 6.7% of 50% sodium hydroxide and the rest water); Blue dye, .015%; water, 45.5%.

The flux is Alpha Metals, New Jersey (201-434-6778) and consists of a gum resin, an organic activator and a terpene alcohol solvent blend. The flux thinner is Alpha Metals 810 and a blend of alcohol and terpene solvent. No one was available who could give an exact formulation.

The degreasers used are trichloroethene and trichloroethylene.

The waste also contains metal grindings and machining wastes together with paper cups and rags, presumably from the epoxy casting process.

A literature review of the toxicity of the above chemicals indicates that practically all of them are mildly to moderately toxic, except for the biocide and lead. Fortunately, most of the spillage has occurred in environmentally insensitive areas except for the possible involvement of two water supplies. This Department plans to sample these two supplies together with any others that may be reasonably close to the two spillages, and have the samples analyzed for lead. It is the writer's opinion that lead will travel to the ground waters more quickly than any of the other chemicals and that it would therefore be a good indicator chemical.

In the writer's opinion, the spillages present a moderate environmental hazard that at this time, aside from the possible aforementioned affect on water supplies, poses no public health problem because of the remoteness and nature of the sites. The question of what to do with the spillages is therefore more properly the responsibility of the Department of Environmental Conservation, as is the matter of the three unregistered industrial waste haulers.

There are approximately 800 intact drums of Motorola's industrial waste at the aforementioned sites. Because of their nature and the potential deleterious environmental effects, they should be moved to a satisfactory disposal area. In this regard, this office has requested Motorola to move the intact drums. It is anticipated that they will be making a decision in the very near future.

Although ignorance of the exact nature of these chemicals is not a good excuse, it must be pointed out that in the opinion of the writer, neither Motorola nor the three haulers had any good indication as to the wastes' actual content.

CRH:PM

Attachment

CC: Machias Office

William Bruyere, Plant Manager, Motorola

Memo: Jaspal Walia
DEC
600 Delaware Ave
Buffalo, NY 14202

Date: 02/24/88

cc: Linda Rusin
SHD
584 Delaware Avenue
Buffalo, NY 14202

CCHD, Olean Office

RE: Review of Motorola Sites in Cattaraugus Cty.

The Department recommends that water supplies on, and adjacent to, all sites be sampled appropriately for Part 5 constituents and 502.1. After review of the sampling results, a determination should be made regarding future sampling frequency and constituents to be analyzed. If the State Health Department can make available laboratory facilities to do the testing, we can provide the sampling contingent on work load.

Site maps are enclosed with the approximate location of wells which should be sampled.

Following are specific comments on each site:

Terwilliger:

The barrels should be removed from the site.

Route 242:

We have the results of the 502.1 collected on 11/30/87.
Results show no contaminant levels of concern.

Boehmer Site:

Location of Machias Municipal and on site private well should be included in report. This site is not in the Allegheny River Basin.

Machias Landfill:

Report should show area which is served by private wells and municipal water. This site is probably on a ground water divide. More work is needed to determine which way the ground water flows. This could vary depending on the time of the year.

Rogers Site:

This site is not in the Allegheny River Basin. Mention is made of the Elton Farm Dump, shouldn't this site be located and investigated?

Wolfer Site:


The Delevan Springs are upstream and draw from an aquifer far removed from this site. The site is not in the Allegheny River Basin.

Arrowhead:

DEC officials should have knowledge of dump location on this site when they supervised closure of the dump in 1982. This site is not in the Allegheny River Basin.

RHJ/smw

WOLFER SITE ROGER'S SITE

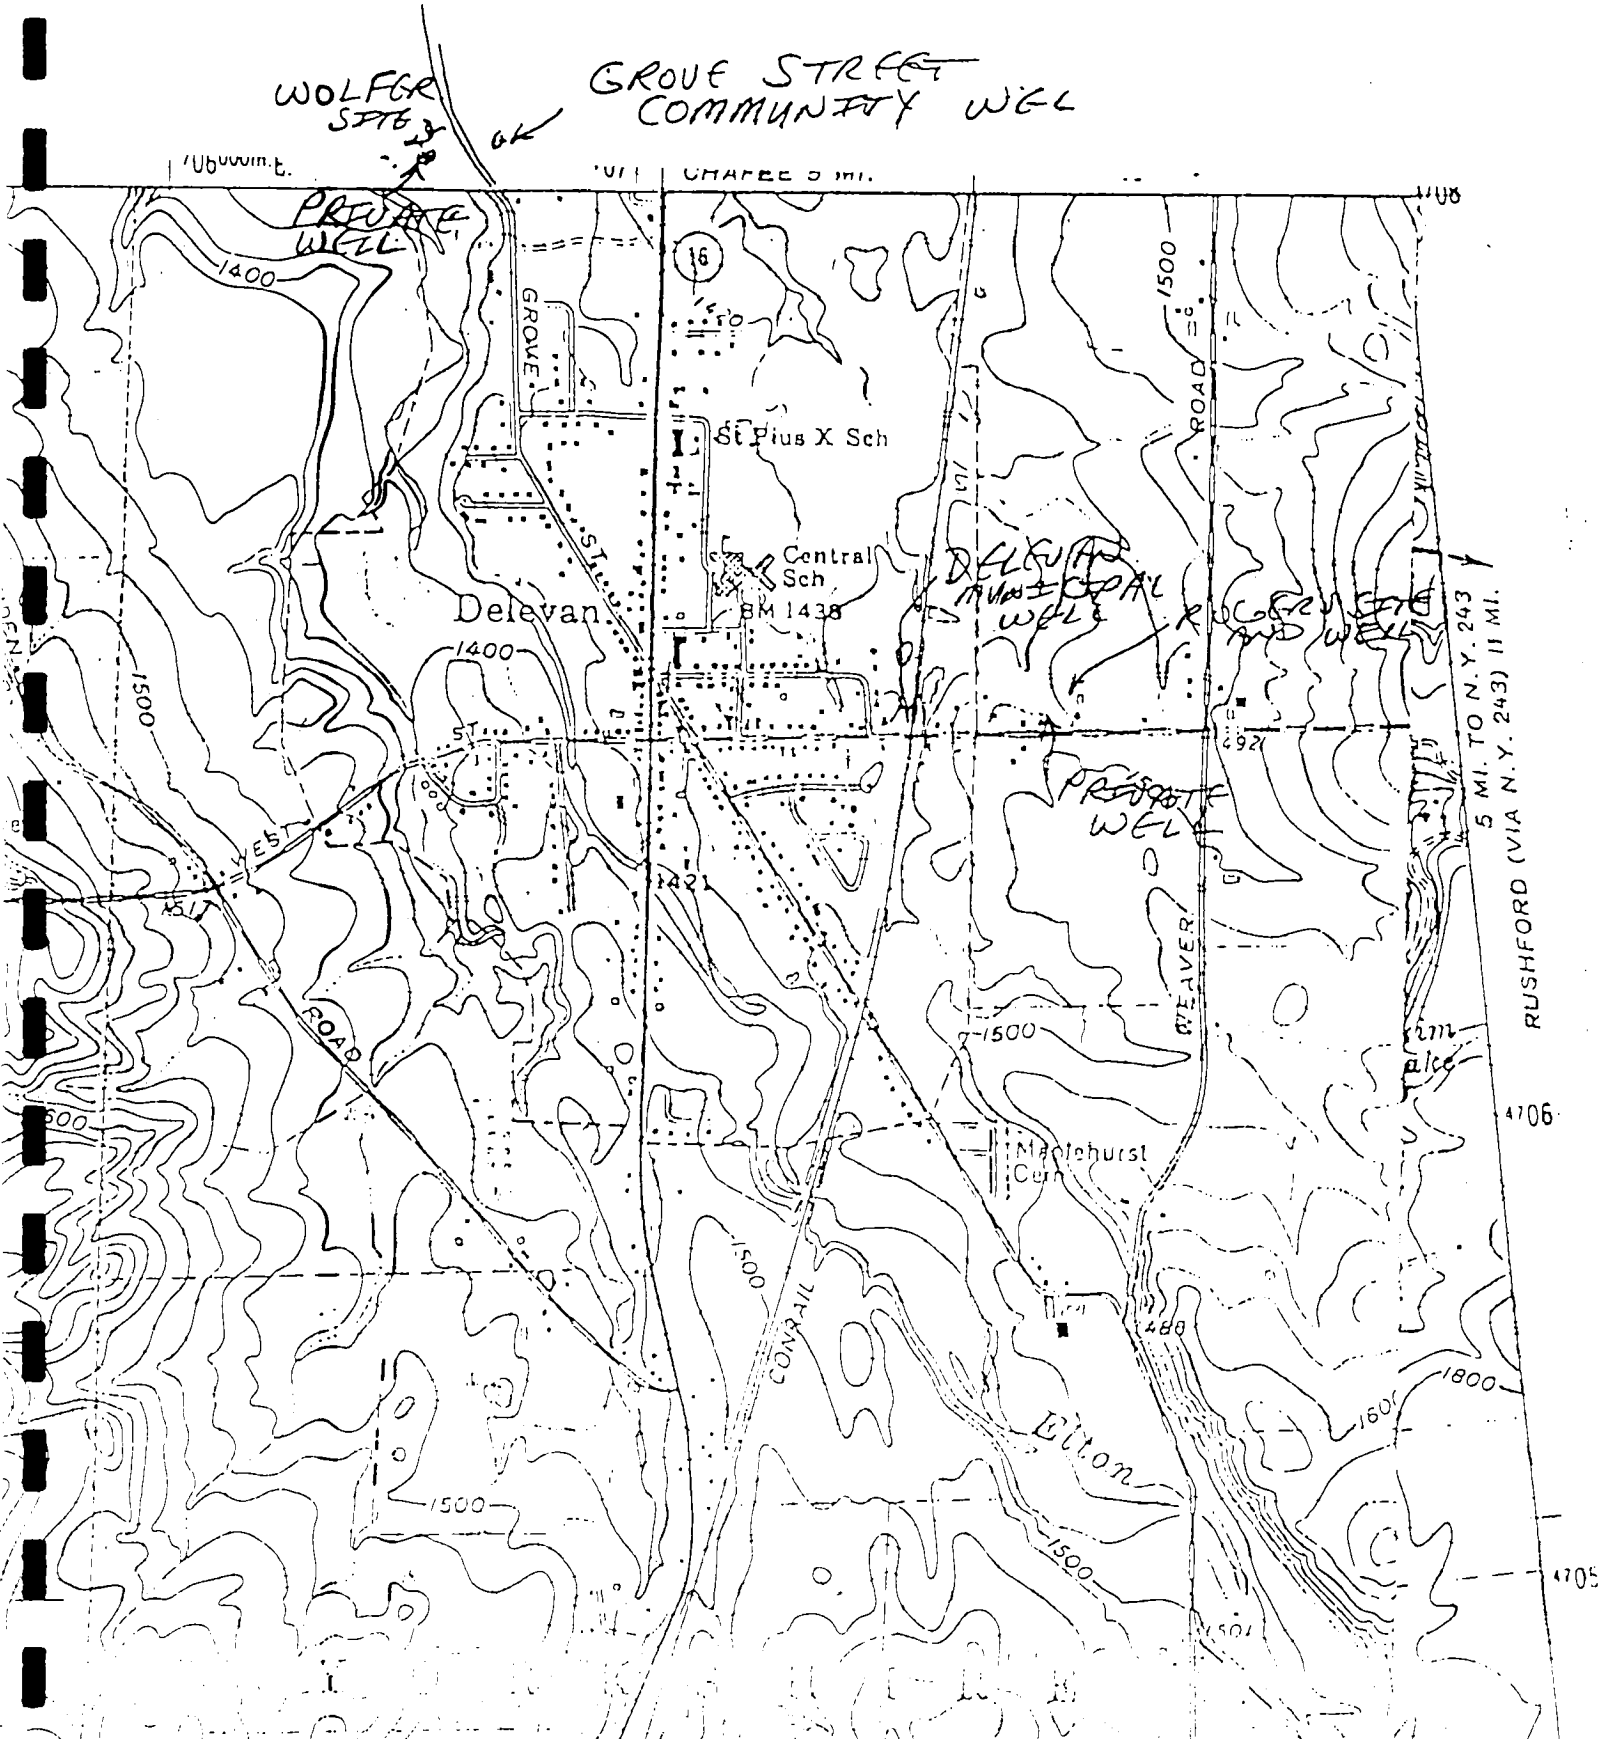

DOCUMENT B-2



New York State Department of Environmental Conservation

MEMORANDUM

TO: Gerald Pietraszek
 FROM: Kevin Glaser
 SUBJECT: Motorola Sites

Michael Wolfer
 # 905020

DATE: December 11, 1989

Last week Motorola, ¹²⁻⁸⁻⁸⁹ as part of their continuing clean-up work, overpacked and moved 3 drums from the Michael Wolfer Site to the Terwillinger Site where they are stored inside his (Morton building) garage. Also stored in this garage are 6 drums overpacked at the Terwillinger Site. All other drums found at the Terwillinger site were empty; these were crushed and transported to the Norman Rogers Site and put in the roll-off box used for scrap metal disposal during that site's excavations. The drums stored inside at Terwillingers will be composited for disposal at a later date and the drum scrapped.


vam

cc: Martin Doster

SECTION 3

Soil Gas Survey
Field G.C. Chromatograms

RAW DATA

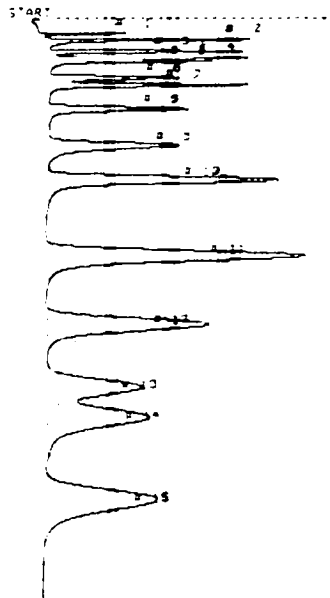


STOP # 011.3
 SAMPLE LIBRARY 1 OCT 20 1992 10:43
 ANALYSIS # 3 RT 242
 INTERNAL TEMP 30 CAL STANDARD
 GAIN 20

SAMPLE LIBRARY 1 OCT 20 1992 10:53
 ANALYSIS # 3 RT 242
 INTERNAL TEMP 30 CAL STANDARD
 GAIN 20

COMPOUND NAME	PEAK	R.T.	AREA/PPM
JC	1	23.0	500.0 PPM
ACETONE	2	33.0	1,000 PPM
TRANS-1,2-DCE	3	52.0	250.0 PPM
MEX	4	62.0	1,000 PPM
CIS-1,2-DCE	5	67.0	510.0 PPM
1,1,1-TCE	6	53.0	43.00 PPM
BENZENE	7	100.0	650.0 PPM
TCE	8	142.0	650.0 PPM
MIBK	9	190.0	4,000 PPM
TOLUENE	10	250.0	2,220 PPM
PCE	11	371.0	2,300 PPM
CHLOROBENZENE	12	481.0	2,280 PPM
ETHYLBENZENE	13	580.0	4,100 PPM
M-XYLENE	14	620.0	5,100 PPM
O-XYLENE	15	750.0	6,100 PPM


Comments:

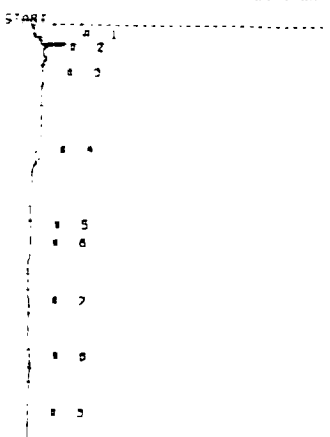

STOP # 1205.5
 SAMPLE LIBRARY 1 OCT 20 1992 11:41
 ANALYSIS # 11 WOLFER
 INTERNAL TEMP 31 BULB BLANK
 GAIN 20 BULB - C


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	31.1	165.1 AUS
UNKNOWN	2	41.2	105.2 AUS
UNKNOWN	8	520.1	145.2 AUS

PHOTO COPY

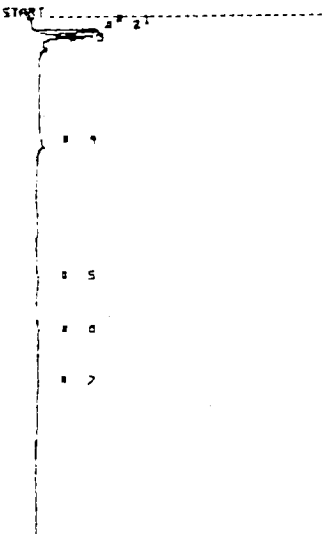

STOP # 025.0
 SAMPLE LIBRARY 1 OCT 20 1992 11:58
 ANALYSIS # 12 WOLFER
 INTERNAL TEMP 31 50-15
 GAIN 20 BULB-4


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	22.1	652.0 AUS
UNKNOWN	2	30.7	254.0 AUS
MIBK	4	200.0	100.0 PPM
UNKNOWN	5	424.5	111.0 AUS

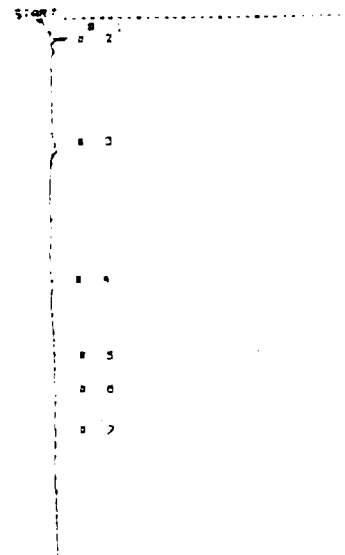

STOP # 840.5
 SAMPLE LIBRARY 1 OCT 20 1992 12:12
 ANALYSIS # 13 WOLFER
 INTERNAL TEMP 32 BULB BLANK
 GAIN 20 BULB-3

COMPOUND NAME	PEAK	R.T.	AREA/PPM
MIBK	3	200.0	147.7 PPM
UNKNOWN	5	530.0	100.4 AUS

PHOTO COPY

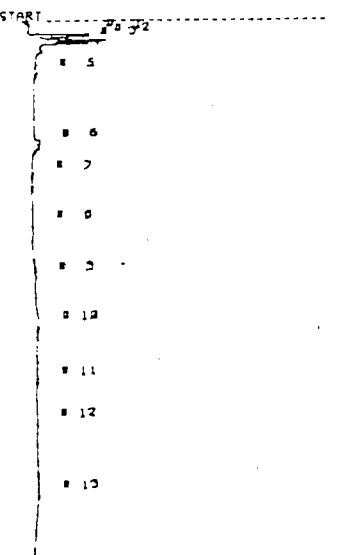


STOP # 060.1
 SAMPLE LIBRARY 1 OCT 20 1992 12:41
 ANALYSIS # 10 WOLFER
 INTERNAL TEMP 32 50-15
 GAIN 20 BULB-3

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	21.3	601.5 AUS
UNKNOWN	2	30.5	413.0 AUS
ACETONE	3	34.0	100.0 PPM
MIBK	6	190.0	151.0 PPM
UNKNOWN	3	400.0	140.0 AUS
CHLOROBENZENE	10	480.0	55.54 PPM


Client NYSDEC
 Project # 00296-02486
 Prepared By Jim Fabrentino
 Date 10/23/92 (10/20/92)

RAW DATA

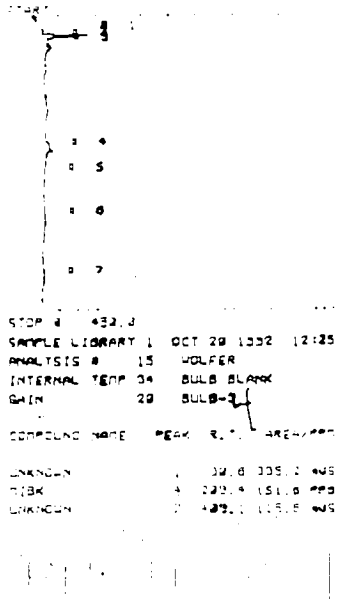


STOP # 432.3
 SAMPLE LIBRARY 1 OCT 29 1992 12:25
 ANALYSIS # 15 WOLFER
 INTERNAL TEMP 34 BULB BLANK
 GAIN 20 BULB-3

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	22.8	335.1 AUS
UNKNOWN	4	423.4	151.8 PPM
UNKNOWN	7	429.1	115.8 AUS

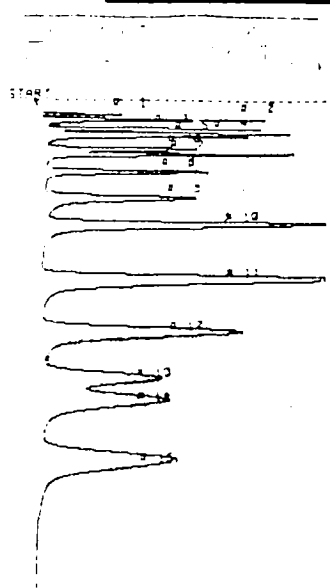

STOP # 355.1
 SAMPLE LIBRARY 1 OCT 29 1992 13:23
 ANALYSIS # 13 WOLFER
 INTERNAL TEMP 32 CAL STANDARD
 GAIN 20


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	22.5	486.5 AUS
UNKNOWN	2	39.3	2.1 US
UNKNOWN	3	45.3	1.8 US
TRANS-1,2-DCE	4	52.7	372.3 PPM
UNKNOWN	5	56.7	2.1 US
UNKNOWN	6	76.7	2.2 US
UNKNOWN	7	85.6	3.7 US
UNKNOWN	8	113.2	0.1 US
UNKNOWN	9	154.4	5.9 US
MSK	12	135.5	6.114 PPM
UNKNOWN	11	282.1	16.7 US
PCE	12	365.2	1.026 PPM
UNKNOWN	13	436.6	6.0 US
CHLOROBENZENE	14	472.4	1.285 PPM
ETHYLBENZENE	15	568.3	6.221 PPM

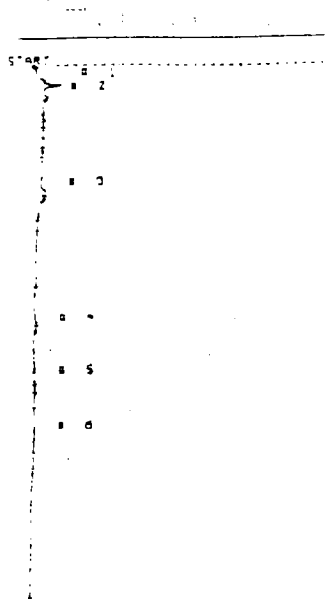

STOP # 843.3
 SAMPLE LIBRARY 1 OCT 29 1992 12:58
 ANALYSIS # 12 WOLFER
 INTERNAL TEMP 32 BULB BLANK
 GAIN 20 BULB-1

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	39.3	124.4 AUS
UNKNOWN	4	423.6	145.4 AUS
CHLOROBENZENE	5	484.5	13.26 PPM

PHOTO COPY

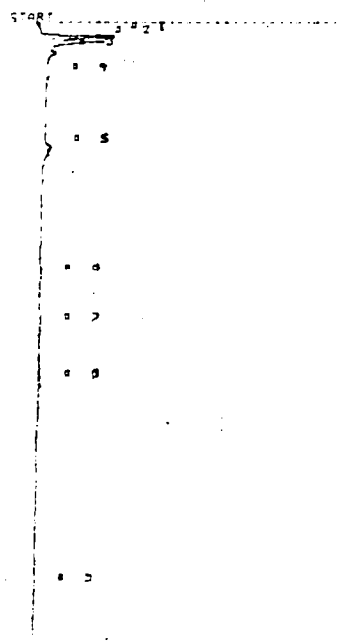


STOP # 359.1
 SAMPLE LIBRARY 1 OCT 29 1992 13:15
 ANALYSIS # 18 WOLFER
 INTERNAL TEMP 32 SA-14
 GAIN 20 BULB-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	21.7	213.3 AUS
UNKNOWN	2	39.2	221.5 AUS
CHLOROBENZENE	7	423.7	23.26 PPM

PHOTO COPY

SAMPLE LIBRARY 1 OCT 29 1992 13:53
 ANALYSIS # 13 WOLFER
 INTERNAL TEMP 32 CAL STANDARD
 GAIN 20

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	22.5	500.0 PPM
ACETONE	2	39.3	1,070 PPM
TRANS-1,2-DCE	3	45.3	254.0 PPM
MEK	4	52.7	1,039 PPM
CIS-1,2-DCE	5	56.7	516.0 PPM
1,1,1-TCA	6	76.7	43,39 PPM
BENZENE	7	85.6	857.0 PPM
PCE	8	113.2	654.0 PPM
MSK	9	154.4	1,060 PPM
TOLUENE	12	135.5	2,229 PPM
PCE	11	282.1	2,300 PPM
CHLOROBENZENE	12	365.2	2,200 PPM
ETHYLBENZENE	13	436.6	1,140 PPM
m-XYLENE	14	472.4	1,160 PPM
o-XYLENE	15	568.3	6,190 PPM

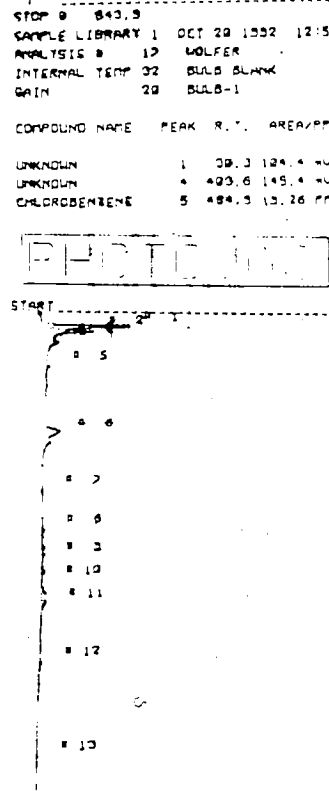

STOP # 781.3
 SAMPLE LIBRARY 1 OCT 29 1992 14:49
 ANALYSIS # 22 WOLFER
 INTERNAL TEMP 33 SA-13
 GAIN 20 BULB-1


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	21.6	145.3 PPM
ACETONE	2	23.5	100.7 PPM
TOLUENE	6	131.2	66.32 PPM
m-XYLENE	11	153.2	103.1 PPM
o-XYLENE	12	559.3	61.03 PPM

Comments:

Client NYSDOC
 Project # 00296-02486
 Prepared By Jim Fahrmeier
 Date 10/23/92 (10/20/92)

PHOTOVAC


RAW DATA

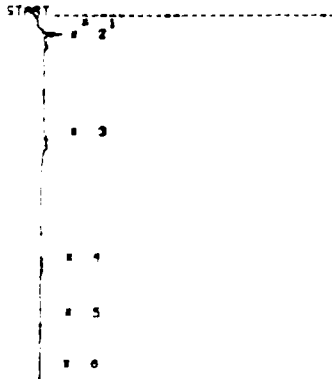

STOP # 532.3
 SAMPLE LIBRARY 1 OCT 28 1992 14:20
 ANALYSIS # 21 WOLFER
 INTERNAL TEMP 29 BULB BLANK
 GAIN 29 BULB-3

COMPOUND NAME	PEAK	R.T.	AREA/PPM
ACETONE	1	39.8	55.29 PPM
UNKNOWN	4	385.2	187.2 HSE


PHOTOVAC

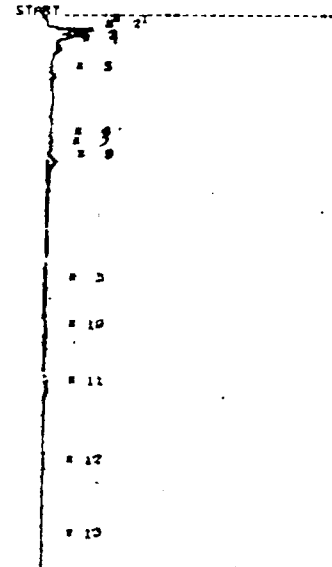

STOP # 539.3
 SAMPLE LIBRARY 1 OCT 28 1992 16:48
 ANALYSIS # 38 WOLFER
 INTERNAL TEMP 27 50-12
 GAIN 29 bulb-3

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	2	37.8	153.8 HSE
UNKNOWN	8	230.4	215.2 HSE
p-XYLENE	11	533.8	148.3 PPM

PHOTOVAC

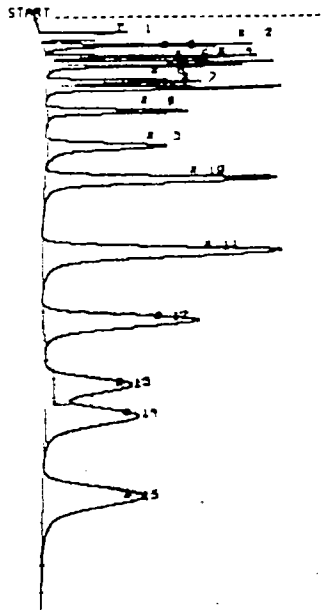

STOP # 515.5
 SAMPLE LIBRARY 1 OCT 28 1992 17:10
 ANALYSIS # 32 WOLFER
 INTERNAL TEMP 27 50-12
 GAIN 29 *col stand*


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	23.8	568.4 HSE
UNKNOWN	2	33.8	2.3 US
HEX	3	59.3	827.3 PPM
UNKNOWN	4	53.3	2.8 US
UNKNOWN	5	64.3	2.3 US
BENZENE	6	83.8	453.7 PPM
UNKNOWN	7	100.8	3.3 US
UNKNOWN	8	135.8	3.2 US
TOLUENE	9	188.7	1,091 PPM
UNKNOWN	10	241.8	3.7 US
CHLOROBENZENE	11	358.3	2,338 PPM
p-XYLENE	12	487.8	5,043 PPM
o-XYLENE	13	568.3	3,834 PPM
UNKNOWN	14	615.3	3.3 US
UNKNOWN	15	742.2	12.4 US

PHOTOVAC

SAMPLE LIBRARY 1 OCT 28 1992 17:25
 ANALYSIS # 38 WOLFER
 INTERNAL TEMP 27 50-12
 GAIN 29 *col stand*

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	23.8	568.8 PPM
ACETONE	2	33.8	1,078 PPM
TRANS-1,2-DCE	3	59.3	254.8 PPM
HEX	4	53.3	1,038 PPM
CIS-1,2-DCE	5	64.3	518.8 PPM
1,1,1-TCF	6	83.8	43.08 PPM
BENZENE	7	100.8	837.8 PPM
ICE	8	135.8	834.8 PPM
HEX	9	188.7	1,868 PPM
TOLUENE	10	241.8	2,728 PPM
PCB	11	358.3	2,388 PPM
CHLOROBENZENE	12	487.8	2,788 PPM
ETHYLBENZENE	13	568.3	4,148 PPM
p-XYLENE	14	615.3	1,168 PPM
o-XYLENE	15	742.2	8,198 PPM


PHOTOVAC



STOP # 302.4
 SAMPLE LIBRARY 1 OCT 28 1992 16:31
 ANALYSIS # 23 WOLFER
 INTERNAL TEMP 28 BULB BLANK
 GAIN 29 BULB-4

COMPOUND NAME PEAK R.T. AREA/PPM

PHOTOVAC

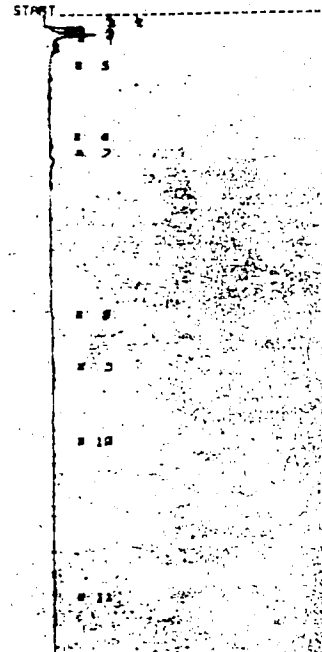

STOP # 1921.7
 SAMPLE LIBRARY 1 OCT 28 1992 17:48
 ANALYSIS # 39 WOLFER
 INTERNAL TEMP 27 50-12
 GAIN 29 BULB-4


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	23.8	838.3 HSE
ACETONE	2	33.8	1,172.4 PPM
TOLUENE	7	188.7	2,738 PPM
ETHYLBENZENE	13	568.3	1,148 PPM
CHLOROBENZENE	14	615.3	1,122.4 HSE

Comments:

Client NYSDEC
 Project # 00296-02486
 Prepared By Tim Fahringer
 Date 10/23/92 (10/20/92)


RAW DATA

PHOTONAC



STOP # 239.0
 SAMPLE LIBRARY 1 OCT 28 1992 16:50
 ANALYSIS # 01 WOLFER
 INTERNAL TEMP 23 200.0 BULB BLANK
 GAIN 20
 COMPOUND NAME PEAK R.T. AREA/FTU


PHOTONAC

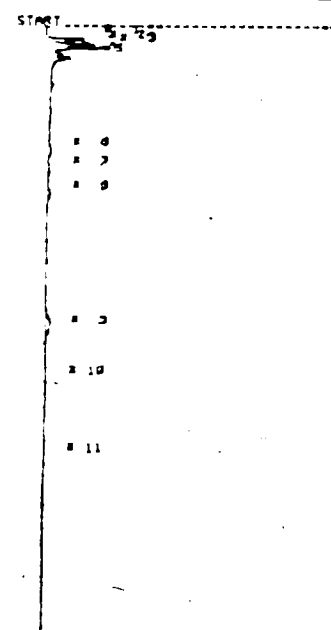

STOP # 308.4
 SAMPLE LIBRARY 1 OCT 28 1992 18:10
 ANALYSIS # 08 WOLFER
 INTERNAL TEMP 23 BULB-BLANK
 GAIN 20
 COMPOUND NAME PEAK R.T. AREA/FTU


UNKNOWN	1	21.3	338.3	448
ACETONE	2	31.7	69.35	178
UNKNOWN	3	36.2	226.3	448
UNKNOWN	5	54.3	155.6	448
CHLOROBENZENE	3	928.9	28.31	178

PHOTONAC



STOP # 421.7
 SAMPLE LIBRARY 1 OCT 28 1992 17:55
 ANALYSIS # 09 WOLFER
 INTERNAL TEMP 23 BULB BLANK
 GAIN 20
 COMPOUND NAME PEAK R.T. AREA/FTU


PHOTONAC

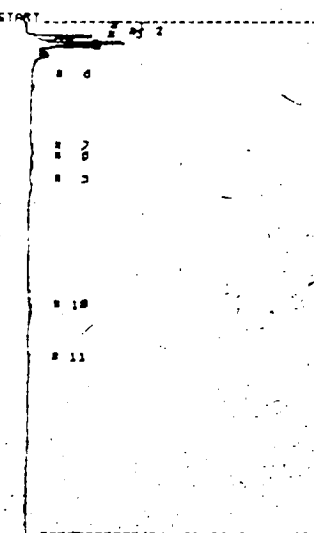

STOP # 500.1
 SAMPLE LIBRARY 1 OCT 28 1992 18:38
 ANALYSIS # 07 WOLFER
 INTERNAL TEMP 23 50-11
 GAIN 20
 COMPOUND NAME PEAK R.T. AREA/FTU

UNKNOWN	1	21.3	285.8	448
ACETONE	2	31.7	179.1	178
UNKNOWN	3	36.2	338.2	448
CHLOROBENZENE	18	464.8	43.30	178
ETHYL BENZENE	11	543.3	63.58	178

PHOTONAC

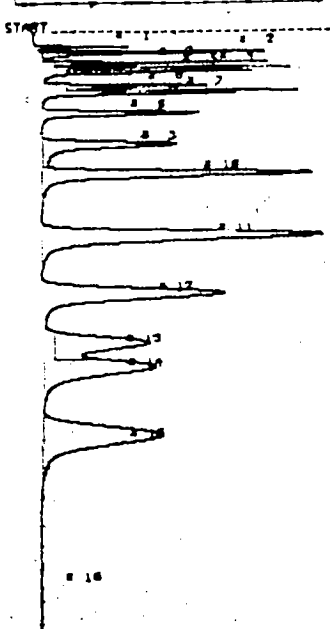

STOP # 525.1
 SAMPLE LIBRARY 1 OCT 28 1992 18:58
 ANALYSIS # 06 WOLFER
 INTERNAL TEMP 23 CAL STANDARD
 GAIN 20
 COMPOUND NAME PEAK R.T. AREA/FTU

UC	1	22.8	134.8	178
ACETONE	2	31.3	1,809	178
UNKNOWN	3	36.3	2.3	178
UNKNOWN	4	36.7	2.3	178
PEB	5	51.3	315.3	178
UNKNOWN	6	54.3	2.3	178
1,1,1-TCB	7	79.8	78.79	178
UNKNOWN	8	127.2	3.3	178
UNKNOWN	9	179.2	4.3	178
UNKNOWN	10	228.8	5.8	178
UNKNOWN	11	317.1	15.1	178
UNKNOWN	12	368.3	12.1	178
CHLOROBENZENE	13	462.3	1,879	178
UNKNOWN	14	527.1	3.7	178
ETHYLENE	15	630.3	3,345	178

PHOTONAC



STOP # 500.1
 SAMPLE LIBRARY 1 OCT 28 1992 18:38
 ANALYSIS # 07 WOLFER
 INTERNAL TEMP 23 CAL STANDARD
 GAIN 20
 COMPOUND NAME PEAK R.T. AREA/FTU


UC	1	22.8	134.8	178
ACETONE	2	31.3	1,809	178
UNKNOWN	3	36.3	2.3	178
UNKNOWN	4	36.7	2.3	178
PEB	5	51.3	315.3	178
UNKNOWN	6	54.3	2.3	178
1,1,1-TCB	7	79.8	78.79	178
UNKNOWN	8	127.2	3.3	178
UNKNOWN	9	179.2	4.3	178
UNKNOWN	10	228.8	5.8	178
UNKNOWN	11	317.1	15.1	178
UNKNOWN	12	368.3	12.1	178
CHLOROBENZENE	13	462.3	1,879	178
UNKNOWN	14	527.1	3.7	178
ETHYLENE	15	630.3	3,345	178

Comments:

Client NYSDEC
 Project # 00296-02486
 Prepared By Tim Fahrnkopf
 Date 10/23/92 (10/20/92)

RAW DATA


PHOTOVAC



STOP # 404.2
 SAMPLE LIBRARY 1 OCT 29 1332 18:23
 ANALYSIS # 36 WOLFER
 INTERNAL TEMP 30 BULB BLANK
 GAIN 20 BULB-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
ACETONE	1	31.5	105.0 PPM


PHOTOVAC



STOP # 284.3
 SAMPLE LIBRARY 1 OCT 29 1332 19:13
 ANALYSIS # 23 WOLFER
 INTERNAL TEMP 31 BULB BLANK
 GAIN 20 BULB-1

COMPOUND NAME	PEAK	R.T.	AREA/PPM
ACETONE	1	31.5	105.0 PPM


PHOTOVAC



STOP # 257.2
 SAMPLE LIBRARY 1 OCT 29 1332 19:35
 ANALYSIS # 43 WOLFER
 INTERNAL TEMP 32 BULB BLANK
 GAIN 20 BULB-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
ACETONE	1	31.5	105.0 PPM


PHOTOVAC

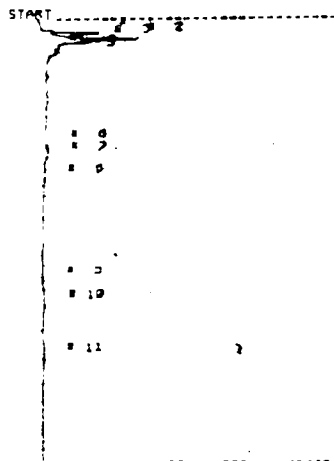

STOP # 638.9
 SAMPLE LIBRARY 1 OCT 29 1332 19:28
 ANALYSIS # 19 WOLFER
 INTERNAL TEMP 31 50-20
 GAIN 20 BULB-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	21.7	434.2 PPM
ACETONE	2	31.1	200.3 PPM
UNKNOWN	10	452.8	147.5 AUS
n-XYLENE	11	336.3	41.35 PPM


PHOTOVAC

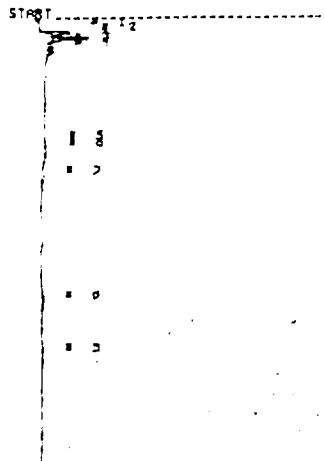

STOP # 710.8
 SAMPLE LIBRARY 1 OCT 29 1332 19:38
 ANALYSIS # 42 WOLFER
 INTERNAL TEMP 30 AMBIENT AIR-BLK
 GAIN 20 BULB-1

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	22.1	126.1 PPM
ACETONE	2	31.4	127.2 PPM
UNKNOWN	8	454.4	178.3 AUS
n-XYLENE	3	336.3	43.86 PPM

PHOTOVAC

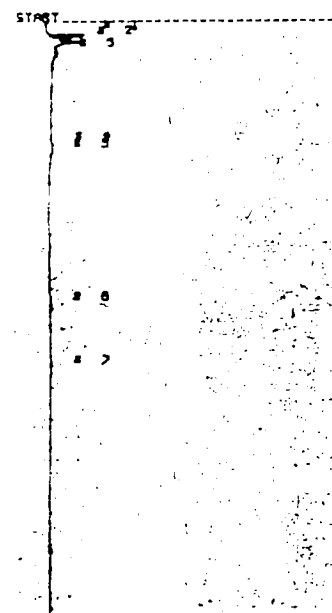

STOP # 348.1
 SAMPLE LIBRARY 1 OCT 29 1332 20:13
 ANALYSIS # 44 WOLFER
 INTERNAL TEMP 23 50-20
 GAIN 20 BULB-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	21.8	222.3 PPM
ACETONE	2	31.8	51.10 PPM
UNKNOWN	8	450.8	104.5 AUS


Comments:

Client NYS Dec
 Project # 00296-02486
 Prepared By Tim Fahrenkopf
 Date 10/23/92 (10/20/92)

RAW DATA

PHOTONAD

START

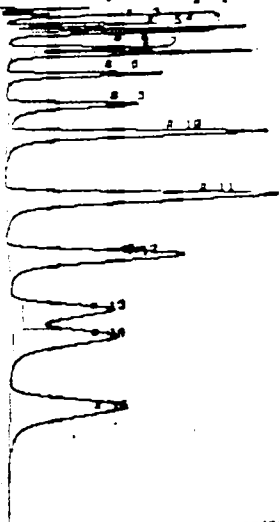

STOP # 021.0

SAMPLE LIBRARY 1 OCT 28 1992 20:32

ANALYSIS # 45 WOLFER

INTERNAL TEMP 23 CAL STANDARD

GAIN 20


COMPOUND NAME PEAK R.T. AREA/HT

COMPOUND NAME	PEAK	R.T.	AREA/HT
UC	1	22.3	409.3 PPS
ACETONE	2	31.5	376.1 PPS
TRANS-1,2-DCE	3	42.5	249.2 PPS
HEX	4	56.1	1,472 PPS
CIS-1,2-DCE	5	69.2	534.2 PPS
1,1,1-TOR	6	83.3	58.21 PPS
BENZENE	7	92.8	609.8 PPS
TCX	8	124.8	631.3 PPS
PIBAK	9	172.2	4,253 PPS
TOLUENE	10	218.4	2,248 PPS
PCE	11	317.5	2,253 PPS
CHLOROBENZENE	12	412.4	2,236 PPS
ETHYLBENZENE	13	436.6	3,838 PPS
M-XYLENE	14	538.3	4,836 PPS
O-XYLENE	15	650.2	6,235 PPS

Comments:

Client NYSDEC
Project # 00296-02486
Prepared By Tim Fahrenberger
Date 10/23/97 (10/20/97)

RAW DATA

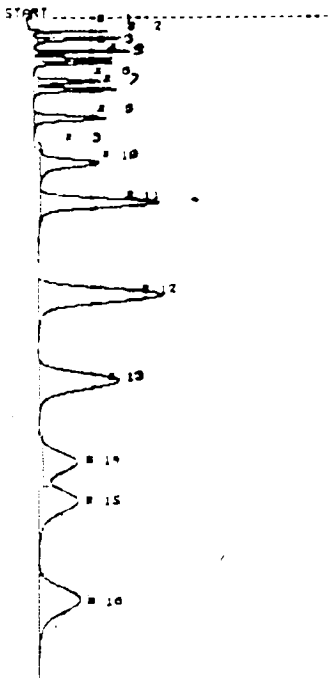

STOP # 1035.7
 SAMPLE LIBRARY 1 OCT 21 1992 8:57
 ANALYSIS # 4 WOLFER
 INTERNAL TEMP 23 CAL STANDARD
 GAIN 20

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	20.5	427.7 AUS
ACETONE	2	31.1	355.0 PPM
UNKNOWN	3	51.3	297.0 AUS
UNKNOWN	4	63.3	374.4 AUS
UNKNOWN	5	68.2	367.6 AUS
UNKNOWN	6	88.5	1.2 US
UNKNOWN	7	110.8	1.5 US
UNKNOWN	8	156.0	1.5 US
TOLUENE	10	226.2	533.1 PPM
UNKNOWN	11	285.1	5.3 US
UNKNOWN	12	432.2	5.8 US
UNKNOWN	13	563.8	7.6 US
UNKNOWN	14	657.1	4.3 US
UNKNOWN	15	758.8	5.9 US
UNKNOWN	16	512.2	6.3 US


PHOTOGRAPH

SAMPLE LIBRARY 1 OCT 21 1992 3:10
 ANALYSIS # 4 WOLFER
 INTERNAL TEMP 24 CAL STANDARD
 GAIN 20

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	20.5	500.0 PPM
ACETONE	2	31.1	1,020.0 PPM
TRANS-1,2-DCE	3	51.3	254.0 PPM
HEX	4	63.3	1,030.0 PPM
CIS-1,2-DCE	5	68.2	518.0 PPM
1,1,1-TCF	6	88.5	43.00 PPM
BENZENE	7	110.8	657.0 PPM
TCE	8	156.0	654.0 PPM
NIK	10	226.2	4,060.0 PPM
TOLUENE	11	285.1	2,220.0 PPM
PCB	12	432.2	2,300.0 PPM
CHLOROBENZENE	13	563.8	2,260.0 PPM
ETHYLBENZENE	14	657.1	4,140.0 PPM
P-XYLENE	15	758.8	4,160.0 PPM
O-XYLENE	16	512.2	15.33 PPM


Comments: rained all day. The ground was saturated

PHOTOGRAPH

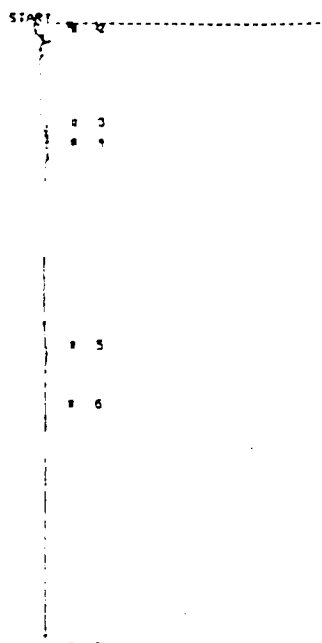

STOP # 384.7
 SAMPLE LIBRARY 1 OCT 21 1992 3:08
 ANALYSIS # 6 WOLFER
 INTERNAL TEMP 20 BULB BLANK
 GAIN 20 BULB-1


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	3	168.2	133.2 AUS
UNKNOWN	4	412.2	218.4 AUS

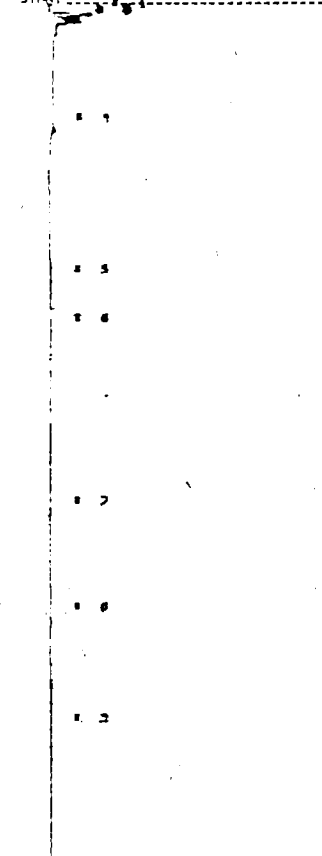

STOP # 1355.0
 SAMPLE LIBRARY 1 OCT 21 1992 10:10
 ANALYSIS # 9 WOLFER
 INTERNAL TEMP 23 50-3
 GAIN 20 BULB-1

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	17.5	335.8 AUS


PHOTOGRAPH



STOP # 373.1
 SAMPLE LIBRARY 1 OCT 21 1992 3:46
 ANALYSIS # 7 WOLFER
 INTERNAL TEMP 23 BULB BLANK
 GAIN 20 BULB-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
---------------	------	------	----------

PHOTOGRAPH

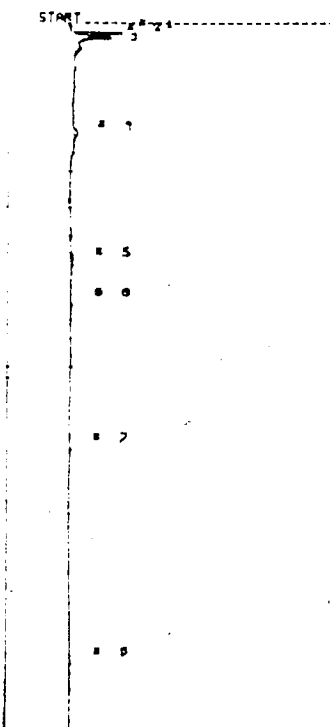


STOP # 1114.5
 SAMPLE LIBRARY 1 OCT 21 1992 10:08
 ANALYSIS # 10 WOLFER
 INTERNAL TEMP 31 50-4
 GAIN 20 BULB-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	17.8	416.2 AUS
UNKNOWN	2	24.6	160.5 AUS
UNKNOWN	4	170.2	137.8 AUS
UNKNOWN	5	322.2	102.4 AUS
UNKNOWN	6	1028.4	131.5 AUS


Client NYSDDEC
 Project # 00296-02486
 Prepared By Jim Fehrenkamp
 Date 10/23/92 (10/22/92)

RAW DATA

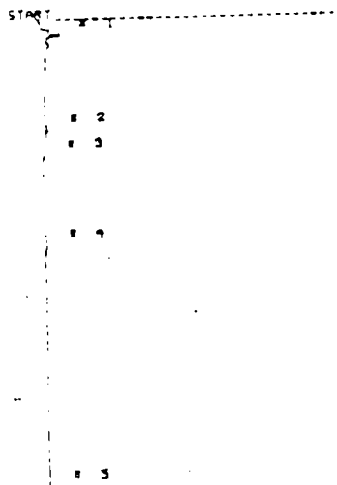

STOP # 1706.1
 SAMPLE LIBRARY 1 OCT 21 1992 10152
 ANALYSIS # 11 WOLFER
 INTERNAL TEMP 32 BULB BLANK
 GAIN 20 BULB-3
 COMPOUND NAME PEAK R.T. AREA/PPM


PHOTOVAC

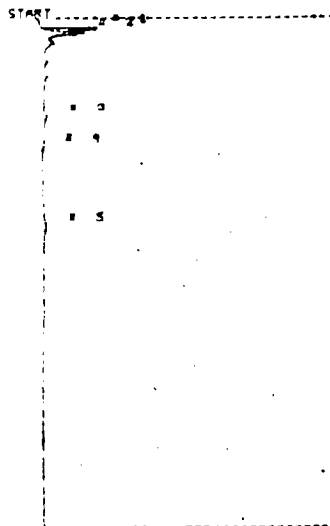

STOP # 895.0
 SAMPLE LIBRARY 1 OCT 21 1992 1110
 ANALYSIS # 12 WOLFER
 INTERNAL TEMP 32 SB-6
 GAIN 20 BULB-83
 COMPOUND NAME PEAK R.T. AREA/PPM

UNKNOWN	PEAK	R.T.	AREA/PPM
UNKNOWN	1	18.7	375.8 AUS
UNKNOWN	2	23.4	196.8 AUS
UNKNOWN	5	331.3	146.5 AUS

PHOTOVAC

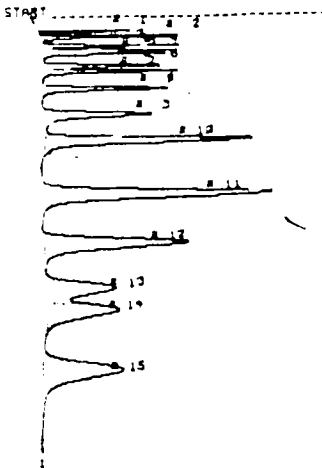


STOP # 636.3
 SAMPLE LIBRARY 1 OCT 21 1992 11122
 ANALYSIS # 14 WOLFER
 INTERNAL TEMP 33 BULB BLANK
 GAIN 20 BULB-1
 COMPOUND NAME PEAK R.T. AREA/PPM

UNKNOWN	PEAK	R.T.	AREA/PPM
UC	1	21.3	462.3 PPB
UNKNOWN	2	28.7	1.1 US
UNKNOWN	3	43.3	1.9 US
TRANS-1,2-DCE	4	50.3	983.5 PPB
TRANS-1,2-DCE	5	54.3	323.7 PPB
UNKNOWN	6	73.3	1.8 US
UNKNOWN	7	82.8	2.8 US
BENZENE	8	108.7	362.1 PPB
TCE	9	148.8	1,083 PPM
UNKNOWN	10	183.2	6.8 US
UNKNOWN	11	224.3	11.3 US
UNKNOWN	12	353.8	8.3 US
PCE	13	424.5	1,258 PPM
UNKNOWN	14	453.2	5.4 US
CHLOROBENZENE	15	552.3	2,173 PPM

cat standard


PHOTOVAC



STOP # 216.5
 SAMPLE LIBRARY 1 OCT 21 1992 11192
 ANALYSIS # 17 WOLFER
 INTERNAL TEMP 36 BULB BLANK
 GAIN 20 BULB-4

COMPOUND NAME PEAK R.T. AREA/PPM
 ACETONE 1 27.8 133.7 PPB

PHOTOVAC

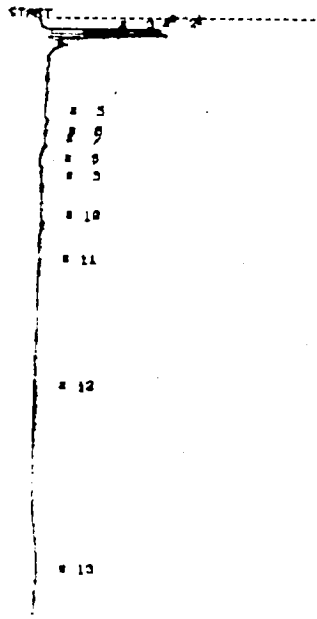

STOP # 353.6
 SAMPLE LIBRARY 1 OCT 21 1992 12103
 ANALYSIS # 21 WOLFER
 INTERNAL TEMP 36 72-6
 GAIN 20 BULB-7


COMPOUND NAME PEAK R.T. AREA/PPM
 UNKNOWN 1 13.7 1.5 US
 UNKNOWN 2 28.8 1.8 US
 ACETONE 3 30.8 373.2 PPB
 TRANS-1,2-DCE 4 42.3 24.81 PPB
 UNKNOWN 12 538.3 123.4 AUS

Comments: rained all day and the ground was saturated

Client OYSDEC
 Project # 00296-02486
 Prepared By Tim Fahrreuter
 Date 10/23/92 (10/21/92)

RAW DATA


PHOTOVAC



STOP # 301.5
 SAMPLE LIBRARY 1 OCT 21 1992 13 13
 ANALYSIS # 11 WOLFER
 INTERNAL TEMP 30 100.0
 GAIN 10 100.0

COMPOUND NAME	PEAK	R.T.	AREA/PTH
UNKNOWN	6	325.2	132.8 MUC


PHOTOVAC



STOP # 350.4
 SAMPLE LIBRARY 1 OCT 21 1992 161 7
 ANALYSIS # 4 WOLFER
 INTERNAL TEMP 30 BULB BLANK
 GAIN 10 BULB-1

COMPOUND NAME	PEAK	R.T.	AREA/PTH
UNKNOWN	4	415.7	108.4 MUC


PHOTOVAC



STOP # 800.0
 SAMPLE LIBRARY 1 OCT 21 1992 13150
 ANALYSIS # 3 WOLFER
 INTERNAL TEMP 30 50-2
 GAIN 10 BULB-4

COMPOUND NAME	PEAK	R.T.	AREA/PTH
UC	1	29.4	231.3 PPH
ACETONE	2	28.8	3,428 PPH


PHOTOVAC



STOP # 717.8
 SAMPLE LIBRARY 1 OCT 21 1992 16129
 ANALYSIS # 5 WOLFER
 INTERNAL TEMP 30 BULB BLANK
 GAIN 10 BULB-1

COMPOUND NAME	PEAK	R.T.	AREA/PTH
UNKNOWN	1	29.1	137.7 MUC
ACETONE	2	28.3	893.3 PPH


PHOTOVAC

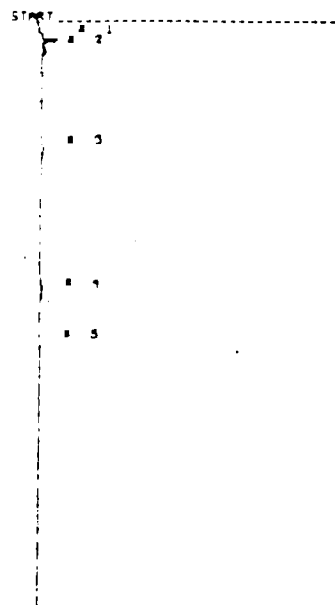

STOP # 328.5
 SAMPLE LIBRARY 1 OCT 21 1992 16137
 ANALYSIS # 6 WOLFER
 INTERNAL TEMP 31 BULB BLANK
 GAIN 10 BULB-3

COMPOUND NAME	PEAK	R.T.	AREA/PTH
UNKNOWN	4	415.7	108.4 MUC

PHOTOVAC

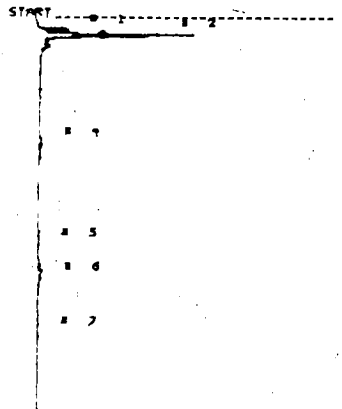

STOP # 852.8
 SAMPLE LIBRARY 1 OCT 21 1992 16143
 ANALYSIS # 7 WOLFER
 INTERNAL TEMP 31 BULB BLANK
 GAIN 10 BULB-3


COMPOUND NAME	PEAK	R.T.	AREA/PTH
UNKNOWN	1	15.3	159.5 MUC
ACETONE	2	28.8	2,330 PPH
UNKNOWN	6	418.2	238.8 MUC

Comments:

Ground saturated

Client NYSDEC
 Project # 00296-02486
 Prepared By Tim Fahrenhoff
 Date 10/23/92 (10/21/92)


RAW DATA

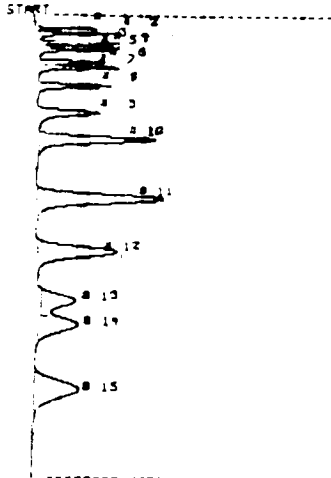

STOP # 707.4
 SAMPLE LIBRARY 1 OCT 21 1992 17:12
 ANALYSIS # 8 WOLFER
 INTERNAL TEMP 31 CAL STANDARD
 GAIN 10


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	20.7	505.6 PPM
ACETONE	2	20.1	1,306 PPM
TRANS-1,2-DCE	3	42.7	276.9 PPM
MEK	4	43.7	1,372 PPM
CIS-1,2-DCE	5	53.5	562.9 PPM
1,1,1-TCA	6	72.7	50.41 PPM
BENZENE	7	81.4	290.6 PPM
TCE	8	100.7	202.3 PPM
MIBK	9	143.6	1,003 PPM
TOLUENE	10	150.2	2,352 PPM
PCE	11	201.3	2,460 PPM
CHLOROBENZENE	12	308.2	2,573 PPM
ETHYLBENZENE	13	444.8	1,633 PPM
M-XYLENE	14	482.3	1,536 PPM
O-XYLENE	15	503.3	6,362 PPM

PHOTOGRAPH

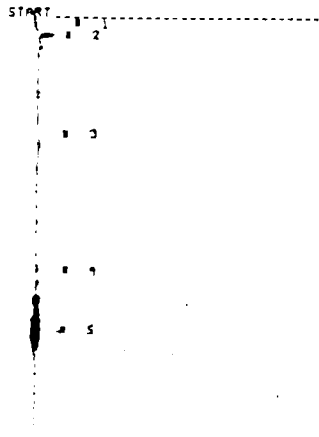

STOP # 663.5
 SAMPLE LIBRARY 1 OCT 21 1992 17:19
 ANALYSIS # 3 WOLFER
 INTERNAL TEMP 31 BULL BLANK
 GAIN 10 BULL-T


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	4	406.3	219.3 AUS

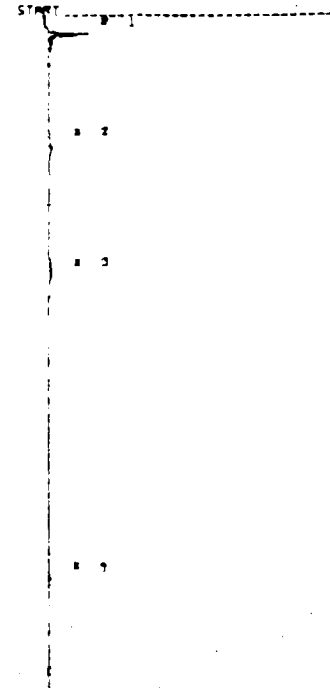

STOP # 1852.3
 SAMPLE LIBRARY 1 OCT 21 1992 17:51
 ANALYSIS # 11 WOLFER
 INTERNAL TEMP 31 BULL BLANK
 GAIN 10 BULL-1

COMPOUND NAME	PEAK	R.T.	AREA/PPM
ACETONE	1	20.1	1,306 PPM
UNKNOWN	3	336.2	235.3 AUS


PHOTOGRAPH

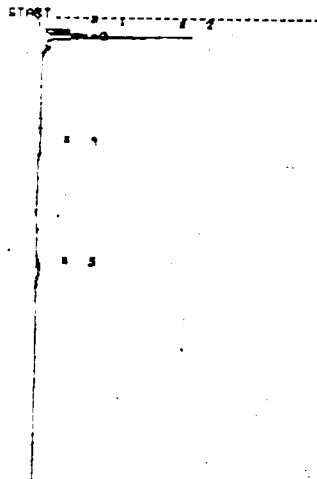

STOP # 248.7
 SAMPLE LIBRARY 1 OCT 21 1992 17:22
 ANALYSIS # 18 WOLFER
 INTERNAL TEMP 31 SB-2
 GAIN 10 BULL-T

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	13.8	228.8 AUS
ACETONE	2	20.0	2,423 PPM
UNKNOWN	5	402.5	241.4 AUS

PHOTOGRAPH

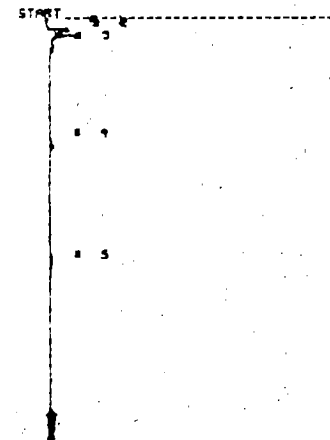

STOP # 672.7
 SAMPLE LIBRARY 1 OCT 21 1992 18:14
 ANALYSIS # 12 WOLFER
 INTERNAL TEMP 31 SB-1
 GAIN 10 BULL-1

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	13.8	113.1 AUS
ACETONE	2	27.6	241.5 PPM

PHOTOGRAPH

CALIBRATED PEAK 10, TOLUENE


SAMPLE LIBRARY 1 OCT 21 1992 17:14
 ANALYSIS # 8 WOLFER
 INTERNAL TEMP 31 CAL STANDARD
 GAIN 10

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	20.7	422.2 PPM
ACETONE	2	20.1	1,283 PPM
TRANS-1,2-DCE	3	42.7	261.3 PPM
MEK	4	43.7	1,235 PPM
CIS-1,2-DCE	5	53.5	530.1 PPM
1,1,1-TCA	6	72.7	47.58 PPM
BENZENE	7	81.4	661.3 PPM
TCE	8	100.7	663.4 PPM
MIBK	9	143.6	1,530 PPM
TOLUENE	10	150.2	2,729 PPM
PCE	11	201.3	2,722 PPM
CHLOROBENZENE	12	308.2	2,428 PPM
ETHYLBENZENE	13	444.8	1,332 PPM
M-XYLENE	14	482.3	1,339 PPM
O-XYLENE	15	503.3	6,535 PPM

Comments: Grounds saturated

Client NYSDEC
 Project # 00796-02486
 Prepared By Tim Fahrenhorst
 Date 10/23/92 (10/21/92)

RAW DATA

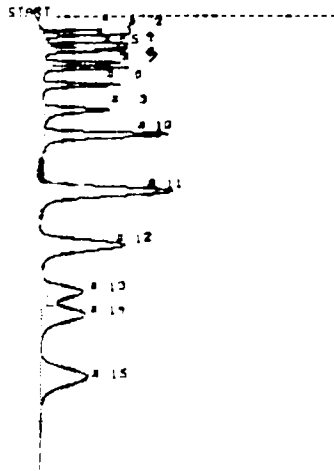

STOP # 793.2
 SAMPLE LIBRARY 1 OCT 21 1992 18:20
 ANALYSIS # 15 WOLFER
 INTERNAL TEMP 32 BULB BLANK
 GAIN 10 BULB-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	29.8	435.0 PPM
ACETONE	2	28.1	1,312 PPM
TRANS-1,2-DCE	3	42.3	278.0 PPM
HEX	4	43.1	1,383 PPM
CIS-1,2-DCE	5	52.3	533.0 PPM
1,1,1-TCA	6	71.5	51.25 PPM
BENZENE	7	73.1	666.0 PPM
TCE	8	106.3	630.4 PPM
PIBK	9	145.2	4,784 PPM
TOLUENE	10	184.7	2,230 PPM
PCE	11	273.1	2,325 PPM
CHLOROBENZENE	12	355.6	2,333 PPM
ETHYLBENZENE	13	430.9	4,350 PPM
M-XYLENE	14	466.4	4,303 PPM
O-XYLENE	15	503.8	6,582 PPM


PHOTOGRAPH

CALIBRATED PEAK 10, TOLUENE

SAMPLE LIBRARY 1 OCT 21 1992 18:30
 ANALYSIS # 15 WOLFER
 INTERNAL TEMP 32 BULB BLANK
 GAIN 10 BULB-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	29.8	468.0 PPM
ACETONE	2	28.1	1,274 PPM
TRANS-1,2-DCE	3	42.3	278.3 PPM
HEX	4	43.1	1,382 PPM
CIS-1,2-DCE	5	52.3	512.4 PPM
1,1,1-TCA	6	71.5	43.83 PPM
BENZENE	7	73.1	646.4 PPM
TCE	8	106.3	663.5 PPM
PIBK	9	145.2	4,618 PPM
TOLUENE	10	184.7	2,220 PPM
PCE	11	273.1	2,258 PPM
CHLOROBENZENE	12	355.6	2,320 PPM
ETHYLBENZENE	13	430.9	4,225 PPM
M-XYLENE	14	466.4	4,230 PPM
O-XYLENE	15	503.8	6,381 PPM


PHOTOGRAPH



STOP # 254.1
 SAMPLE LIBRARY 1 OCT 21 1992 18:13
 ANALYSIS # 13 WOLFER
 INTERNAL TEMP 33 BULB BLANK
 GAIN 10 BULB-3

COMPOUND NAME PEAK R.T. AREA/PPM

PHOTOGRAPH

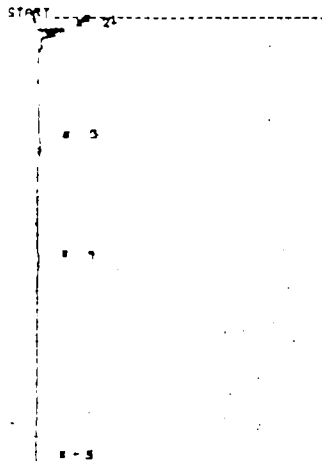


STOP # 579.1
 SAMPLE LIBRARY 1 OCT 21 1992 18:38
 ANALYSIS # 17 WOLFER
 INTERNAL TEMP 31 AMBIENT AIR BLK
 GAIN 10 BULB-3

COMPOUND NAME PEAK R.T. AREA/PPM

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	15.3	253.2 PPM

PHOTOGRAPH




STOP # 790.7
 SAMPLE LIBRARY 1 OCT 21 1992 18:14
 ANALYSIS # 14 WOLFER
 INTERNAL TEMP 34 BULB BLANK
 GAIN 10 BULB-4

COMPOUND NAME PEAK R.T. AREA/PPM

COMPOUND NAME	PEAK	R.T.	AREA/PPM
ACETONE	1	28.9	275.4 PPM

PHOTOGRAPH

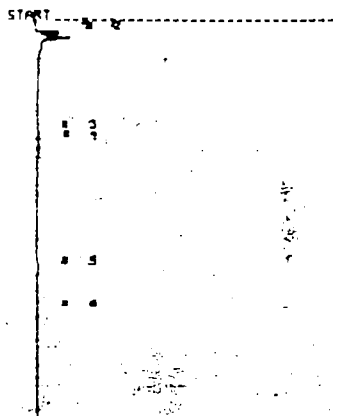

STOP # 927.5
 SAMPLE LIBRARY 1 OCT 21 1992 19:11
 ANALYSIS # 18 WOLFER
 INTERNAL TEMP 30 SO-6 DUP
 GAIN 10 BULB-4


COMPOUND NAME PEAK R.T. AREA/PPM

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	15.7	169.8 PPM
ACETONE	2	27.5	291.3 PPM

Comments: Ground saturated

Client NYSDEC
 Project # 00296-02486
 Prepared By Tim Fahrenkopf
 Date 10/23/92 (10/21/92)

RAW DATA

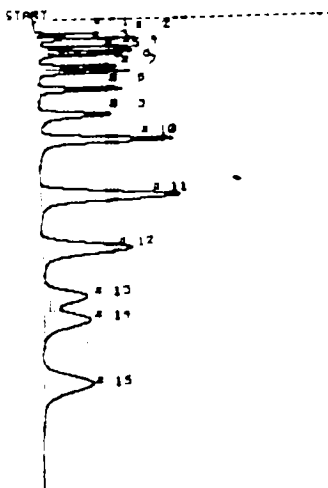

STOP @ 725.7

SAMPLE LIBRARY 1 OCT 21 1992 13:15
 ANALYSIS # 13 MOLFERR
 INTERNAL TEMP 31 CAL STANDARD
 GAIN 18

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	22.7	469.5 PPM
ACETONE	2	27.3	1,599 PPM
TRANS-1,2-DCE	3	42.1	304.6 PPM
MEK	4	48.3	1,198 PPM
CIS-1,2-DCE	5	52.7	594.6 PPM
1,1,1-TCA	6	71.3	51.32 PPM
BENZENE	7	78.3	439.4 PPM
TCE	8	106.8	218.4 PPM
MIBK	9	143.2	7,302 PPM
TOLUENE	10	184.7	2,343 PPM
PCB	11	273.8	2,381 PPM
CHLOROBENZENE	12	357.4	2,548 PPM
ETHYLBENZENE	13	432.2	7,512 PPM
M-XYLENE	14	468.8	7,542 PPM
O-XYLENE	15	568.3	8,364 PPM

PHOTOGRAPH


SAMPLE LIBRARY 1 OCT 21 1992 13:21
 ANALYSIS # 13 MOLFERR
 INTERNAL TEMP 31 CAL STANDARD
 GAIN 18

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	22.7	469.5 PPM
ACETONE	2	27.3	1,599 PPM
TRANS-1,2-DCE	3	42.1	304.6 PPM
MEK	4	48.3	1,198 PPM
CIS-1,2-DCE	5	52.7	594.6 PPM
1,1,1-TCA	6	71.3	51.32 PPM
BENZENE	7	78.3	439.4 PPM
TCE	8	106.8	218.4 PPM
MIBK	9	143.2	7,302 PPM
TOLUENE	10	184.7	2,343 PPM
PCB	11	273.8	2,381 PPM
CHLOROBENZENE	12	357.4	2,548 PPM
ETHYLBENZENE	13	432.2	7,512 PPM
M-XYLENE	14	468.8	7,542 PPM
O-XYLENE	15	568.3	8,364 PPM

Comments: Ground Saturated

Client NYSD E C
 Project # 00296-02486
 Prepared By Tim Fahrenhor
 Date 10/23/92 Cl/21/92

PHOTOVAC

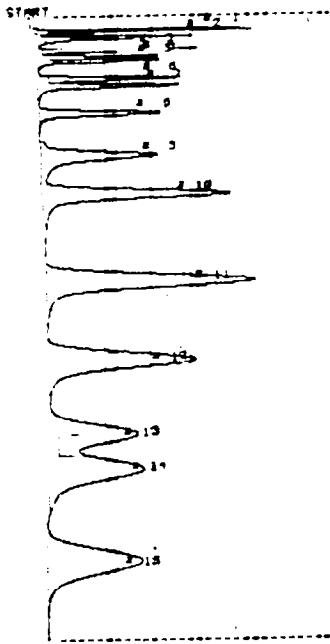

STOP # 502.3
 SAMPLE LIBRARY 1 OCT 22 1992 10:56
 ANALYSIS # 8 MOLFER
 INTERNAL TEMP 27 CAL STANDARD
 GAIN 28


COMPOUND NAME	PEAK	R.T.	AREA/PTH
UNKNOWN	1	22.0	1.7 US
UNKNOWN	2	32.3	1.5 US
UNKNOWN	3	52.5	1.0 US
UNKNOWN	4	63.3	1.5 US
UNKNOWN	5	68.7	1.5 US
UNKNOWN	6	57.3	2.0 US
UNKNOWN	7	193.8	2.8 US
UNKNOWN	8	151.2	3.1 US
UNKNOWN	9	216.6	0.3 US
UNKNOWN	10	276.6	3.8 US
UNKNOWN	11	412.4	13.0 US
UNKNOWN	12	555.7	13.2 US
UNKNOWN	13	655.3	3.2 US
UNKNOWN	14	793.7	11.4 US
UNKNOWN	15	850.1	13.3 US

SAMPLE LIBRARY 1 OCT 22 1992 11:17
 ANALYSIS # 8 MOLFER
 INTERNAL TEMP 27 CAL STANDARD
 GAIN 28

COMPOUND NAME	PEAK	R.T.	AREA/PTH
UC	1	22.0	500.8 PTH
ACETONE	2	32.3	1,000 PTH
TRANS-1,2-DCE	3	52.5	254.0 PTH
MEK	4	63.3	1,000 PTH
CIS-1,2-DCE	5	68.7	818.0 PTH
1,1,1-TCA	6	57.3	43.28 PTH
BENZENE	7	193.8	652.0 PTH
TCE	8	151.2	654.0 PTH
RISK	9	216.6	4,048 PTH
TOLUENE	10	276.6	2,728 PTH
PCE	11	412.4	2,360 PTH
CHLOROBENZENE	12	555.7	2,290 PTH
ETHYLBENZENE	13	655.3	4,149 PTH
M-XYLENE	14	793.7	4,100 PTH
O-XYLENE	15	850.1	6,180 PTH


Comments:

RAW DATA

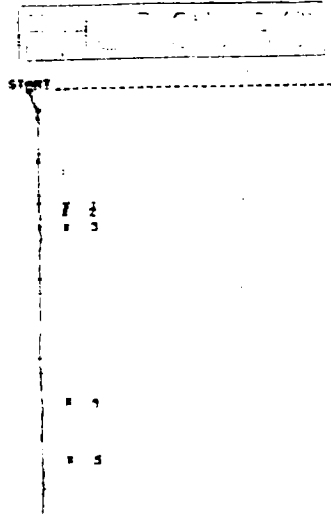


STOP # 500.5
 SAMPLE LIBRARY 1 OCT 22 1992 11:21
 ANALYSIS # 3 MOLFER
 INTERNAL TEMP 30 BULB BLANK
 GAIN 28 BULB-1
 COMPOUND NAME PEAK R.T. AREA/PTH
 UNKNOWN 1 452.3 142.1 US

PHOTOVAC

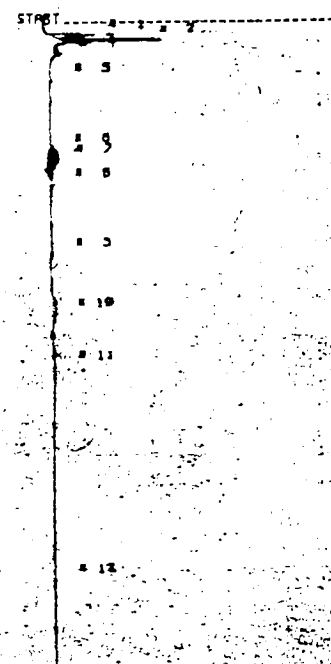


STOP # 1022.3
 SAMPLE LIBRARY 1 OCT 22 1992 11:30
 ANALYSIS # 18 MOLFER
 INTERNAL TEMP 32 50-5
 GAIN 28 BULB-1
 COMPOUND NAME PEAK R.T. AREA/PTH
 UNKNOWN 1 20.3 480.8 US
 UNKNOWN 2 23.3 873.3 US
 UNKNOWN 10 453.2 357.5 US

PHOTOVAC

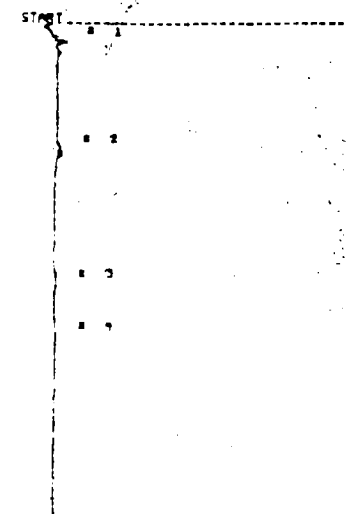

STOP # 739.4
 SAMPLE LIBRARY 1 OCT 22 1992 11:53
 ANALYSIS # 13 MOLFER
 INTERNAL TEMP 33 BULB BLANK
 GAIN 28 BULB-1
 COMPOUND NAME PEAK R.T. AREA/PTH
 PCE 1 404.7 23.35 PTH


PHOTOVAC

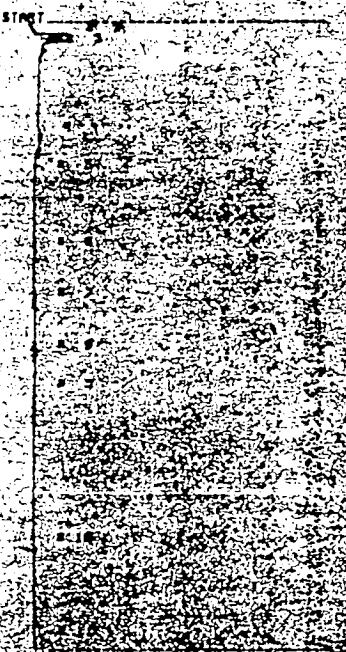


STOP # 1022.3
 SAMPLE LIBRARY 1 OCT 22 1992 11:53
 ANALYSIS # 13 MOLFER
 INTERNAL TEMP 33 BULB BLANK
 GAIN 28 BULB-1
 COMPOUND NAME PEAK R.T. AREA/PTH
 PCE 1 404.7 23.35 PTH

Client: NYSDOC
 Project # 00296-02486
 Prepared By Tim Fahrenberg
 Date 10/23/92 (10/22/92)


RAW DATA




STOP # 336.1
 SAMPLE LIBRARY 1 OCT 22 1992 12:0
 ANALYSIS # 12 WOLFER
 INTERNAL TEMP 34 BULB BLANK
 GAIN 20 BULB-1
 COMPOUND NAME PEAK R.T. AREA/PPM
 UNKNOWN 2 22.6 113.1 US

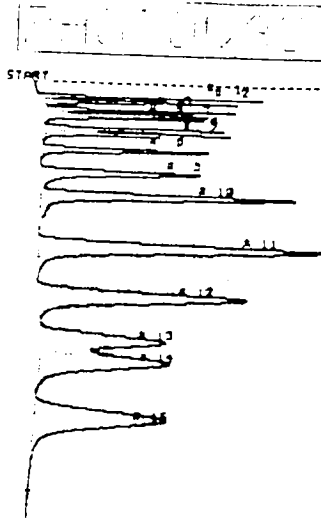

STOP # 872.5
 SAMPLE LIBRARY 1 OCT 22 1992 12:55
 ANALYSIS # 10 WOLFER
 INTERNAL TEMP 32 CAL STANDARD
 GAIN 20
 COMPOUND NAME PEAK R.T. AREA/PPM
 UNKNOWN 1 29.7 1.7 US
 UNKNOWN 2 27.5 2.8 US
 UNKNOWN 3 49.3 1.8 US
 UNKNOWN 4 47.7 1.8 US
 TRANS-1,2-DCE 5 51.3 241.3 PPM
 CIS-1,2-DCE 6 83.3 933.6 PPM
 UNKNOWN 7 78.5 2.8 US
 1,1,1-TCF 8 192.4 52.52 PPM
 UNKNOWN 9 133.2 4.3 US
 UNKNOWN 10 177.2 8.2 US
 UNKNOWN 11 252.7 14.4 US
 UNKNOWN 12 334.3 12.1 US
 PCE 13 433.5 1.225 PPM
 UNKNOWN 14 433.5 5.8 US
 CHLORODIBENE 15 525.7 8.178 PPM



STOP # 324.2
 SAMPLE LIBRARY 1 OCT 22 1992 12:23
 ANALYSIS # 14 WOLFER
 INTERNAL TEMP 34 BULB BLANK
 GAIN 20 BULB-3
 COMPOUND NAME PEAK R.T. AREA/PPM

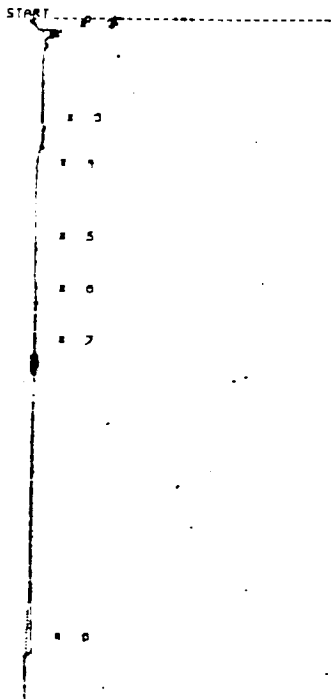

STOP # 1977.1
 SAMPLE LIBRARY 1 OCT 22 1992 12:42
 ANALYSIS # 15 WOLFER
 INTERNAL TEMP 32 30-21
 GAIN 20 BULB-1
 COMPOUND NAME PEAK R.T. AREA/PPM
 UNKNOWN 1 28.9 142.3 AUS
 UNKNOWN 8 333.9 1.8 US

PHOTOGRAPH

PHOTOGRAPH



STOP # 1083.3
 SAMPLE LIBRARY 1 OCT 22 1992 13:12
 ANALYSIS # 16 WOLFER
 INTERNAL TEMP 32 30-21
 GAIN 20 BULB-1
 COMPOUND NAME PEAK R.T. AREA/PPM
 UNKNOWN 1 28.9 142.3 AUS
 UNKNOWN 8 333.9 1.8 US


PHOTOGRAPH

SAMPLE LIBRARY 1 OCT 22 1992 13:12
 ANALYSIS # 16 WOLFER
 INTERNAL TEMP 32 CAL STANDARD
 GAIN 20
 COMPOUND NAME PEAK R.T. AREA/PPM
 UC 1 29.7 588.8 PPM
 ACETONE 2 27.5 1,870 PPM
 TRANS-1,2-DCE 3 49.3 154.0 PPM
 PEX 4 47.7 1,028 PPM
 CIS-1,2-DCE 5 51.3 518.8 PPM
 1,1,1-TCF 6 83.3 43.88 PPM
 BENZENE 7 78.5 452.8 PPM
 TCE 8 192.4 434.8 PPM
 TIBK 9 133.2 4,060 PPM
 TOLUENE 10 177.2 2,328 PPM
 PCE 11 252.7 2,300 PPM
 CHLORODIBENE 12 334.3 2,280 PPM
 ETHYLBENE 13 433.5 4,140 PPM
 M-XYLENE 14 433.5 4,160 PPM
 O-XYLENE 15 525.7 8,108 PPM

Comments:


Client AVSDEC
 Project # 00296-02486
 Prepared By Tim Fehrenbacher
 Date 10/23/92 (10/22/92)

PHOTOLAB



STOP # 281.0
SAMPLE LIBRARY 1 OCT 22 1992 13:19
ANALYSIS # 17 WOLFER
INTERNAL TEMP 34 BULB BLANK
GAIN 20 BULB-4


COMPOUND NAME PEAK R.T. AREA/PPM



STOP # 284.2
SAMPLE LIBRARY 1 OCT 22 1992 13:34
ANALYSIS # 15 WOLFER
INTERNAL TEMP 35 BULB BLANK
GAIN 20 BULB-1

COMPOUND NAME PEAK R.T. AREA/PPM


ACETONE 1 27.3 22.33 PPM

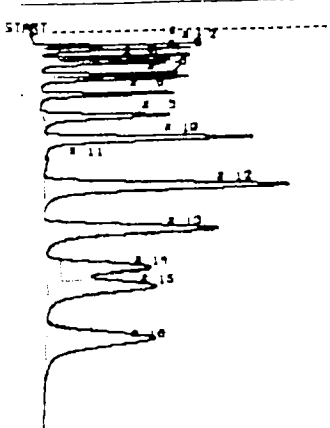

STOP # 615.6
SAMPLE LIBRARY 1 OCT 22 1992 14:28
ANALYSIS # 20 WOLFER
INTERNAL TEMP 35 CAL STANDARD
GAIN 20

COMPOUND NAME PEAK R.T. AREA/PPM


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	28.4	329.2 PPM
ACETONE	2	28.8	673.5 PPM
UNKNOWN	3	38.8	1.2 US
PEK	4	45.2	765.2 PPM
PEK	5	45.1	802.3 PPM
UNKNOWN	6	65.2	1.8 US
1,1,1-TCA	7	72.5	35.35 PPM
UNKNOWN	8	56.1	2.2 US
UNKNOWN	9	125.8	3.9 US
UNKNOWN	10	184.2	6.8 US
UNKNOWN	12	238.2	11.1 US
UNKNOWN	13	302.5	3.2 US
UNKNOWN	14	368.2	6.8 US
ETHYLBENZENE	15	332.2	3.434 PPM
UNKNOWN	16	473.2	3.1 US

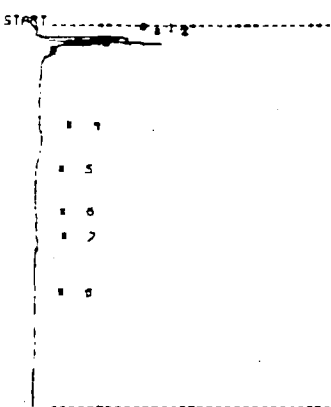

STOP # 533.2
SAMPLE LIBRARY 1 OCT 22 1992 13:45
ANALYSIS # 28 WOLFER
INTERNAL TEMP 35 SR-23
GAIN 20 BULB-4

COMPOUND NAME PEAK R.T. AREA/PPM

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	15.8	242.1 PPM
ACETONE	2	27.2	355.4 PPM
CHLOROBENZENE	7	346.4	23.13 PPM

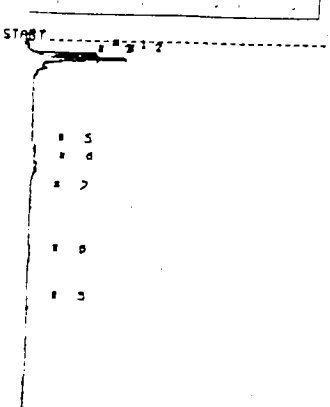

STOP # 607.5
SAMPLE LIBRARY 1 OCT 22 1992 14:12
ANALYSIS # 22 WOLFER
INTERNAL TEMP 35 SR-24
GAIN 20 BULB-1

COMPOUND NAME PEAK R.T. AREA/PPM

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	1	15.4	638.2 AUS
ACETONE	2	25.8	262.2 PPM
UNKNOWN	3	25.5	165.2 AUS
CHLOROBENZENE	8	340.8	28.13 PPM

PHOTOLAB

SAMPLE LIBRARY 1 OCT 22 1992 14:38
ANALYSIS # 28 WOLFER
INTERNAL TEMP 34 CAL STANDARD
GAIN 20

COMPOUND NAME PEAK R.T. AREA/PPM


COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	28.4	508.8 PPM
ACETONE	2	28.8	1.020 PPM
TRANS-1,2-DCE	3	38.8	254.8 PPM
PEK	4	45.2	1.020 PPM
CIS-1,2-DCE	5	45.1	518.8 PPM
1,1,1-TCA	6	65.2	43.08 PPM
BENZENE	7	72.5	632.8 PPM
TCA	8	56.1	654.8 PPM
PEK	9	125.8	4.900 PPM
TOLUENE	10	184.2	2.220 PPM
PCB	12	238.2	2.200 PPM
CHLOROBENZENE	13	302.5	2.280 PPM
ETHYLBENZENE	14	368.2	4.150 PPM
O-XYLENE	15	332.2	4.180 PPM
O-XYLENE	16	473.2	4.180 PPM

Comments:

Client NYSDEC
Project # 00296-02486
Prepared By Tim Fabrentus
Date 10/23/92 10/22/92

RAW DATA


PHOTOGRAPH



STOP # 223.1
 SAMPLE LIBRARY 1 OCT 22 1992 13:50
 ANALYSIS # 21 MOLFEX
 INTERNAL TEMP 32 BLAD BLANK
 GAIN 20 BLAD-3

COMPOUND NAME	PEAK	R.T.	AREA/PPM
---------------	------	------	----------


PHOTOGRAPH



STOP # 208.0
 SAMPLE LIBRARY 1 OCT 22 1992 19:45
 ANALYSIS # 29 MOLFEX
 INTERNAL TEMP 30 BLAD BLANK
 GAIN 20 BLAD-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
ACETONE	2	26.5	211.9 PPM


PHOTOGRAPH



STOP # 412.7
 SAMPLE LIBRARY 1 OCT 22 1992 15:18
 ANALYSIS # 33 MOLFEX
 INTERNAL TEMP 34 BLAD BLANK
 GAIN 20 BLAD-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UNKNOWN	8	343.8	286.3 HUG


PHOTOGRAPH

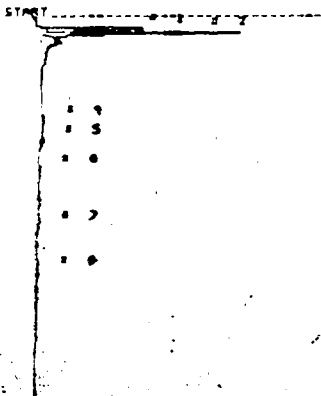

STOP # 085.3
 SAMPLE LIBRARY 1 OCT 22 1992 14:50
 ANALYSIS # 23 MOLFEX
 INTERNAL TEMP 35 50-25
 GAIN 20 BLAD-3

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	13.5	897.3 PPM
ACETONE	2	26.6	1.529 PPM

PHOTOGRAPH



STOP # 593.6
 SAMPLE LIBRARY 1 OCT 22 1992 15:18
 ANALYSIS # 32 MOLFEX
 INTERNAL TEMP 35 INCIDENT RATE BLK
 GAIN 20 BLAD-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
UC	1	13.5	87.36 PPM
ACETONE	2	26.5	135.9 PPM
UNKNOWN	6	333.1	179.3 HUG

PHOTOGRAPH



STOP # 541.2
 SAMPLE LIBRARY 1 OCT 22 1992 15:18
 ANALYSIS # 31 MOLFEX
 INTERNAL TEMP 35 50-25
 GAIN 20 BLAD-4

COMPOUND NAME	PEAK	R.T.	AREA/PPM
---------------	------	------	----------

Comments:

Client NYSDEC
 Project # 00296-02486
 Prepared By Tim Fahrenberg
 Date 10/23/92 (10/22/92)

SECTION 4

Data Validation Report

rd
d:\word\wolf.doc
3/1/93

DATA VALIDATION REPORT

ORGANIC and INORGANIC ANALYSES

Michael Wolfer Site

Sample Delivery Group No. 11257

Sampling Date of November 18, 1992

PREPARED FOR:

Dunn Corporation
12 Metro Park Road
Albany, New York 12205

January 1993

PREPARED BY:

ChemWorld Environmental, Inc.
4500 Avamere Street
Bethesda, Maryland 20814
(301)564-6230

Michael Wolfer Site
Data Validation Report: Organic and Inorganic Analyses

Table of Contents		Page
	Introduction	1
1.0	Volatile Organics by GC/MS	1
1.1	Holding Times	2
1.2	System Monitoring Compound Recovery	2
1.3	Matrix Spike/Matrix Spike Duplicate (MS/MSD)	2
1.4	Calibration	2
1.5	Blanks	3
1.6	GC/MS Instrument Performance Check	3
1.7	Tentatively Identified Compounds	3
1.8	Internal Standards	3
1.9	Field Duplicates	3
1.10	TCL Identification	4
1.11	Compound Quantitation and Reported Detection Limits	4
1.12	System Performance	4
2.0	Semi-Volatile Organics by GC/MS	4
2.1	Holding Times	4
2.2	Surrogate Recovery	4
2.3	MS/MSD	5
2.4	Calibration	5
2.5	Blanks	6
2.6	GC/MS Instrument Performance Check	6
2.7	Tentatively Identified Compounds	6
2.8	Internal Standards	6
2.9	Field Duplicates	6
2.10	TCL Compound Identification	6
2.11	Compound Quantitation and Reported Detection Limits	6
2.12	System Performance	6
3.0	Pesticides/PCBs by GC	7
3.1	Holding Times	7
3.2	Surrogate Recovery	7
3.3	MS/MSD	7
3.4	Blanks	8
3.5	Instrument (GC) Performance	8
3.6	Calibration	8
3.7	Field Duplicates	9
3.8	Compound Identification	9
3.9	Compound Quantitation and Reported Detection Limits	9

Michael Wolfer Site
Data Validation Report: Organic and Inorganic Analyses

Table of Contents, continued

4.0	Inorganic Analyses by AA and ICP	9
4.1	Holding Times	10
4.2	Calibration	10
4.3	CRDL Standards	10
4.4	Blanks	10
4.5	ICP Interference Check	10
4.6	Spiked Sample Recovery	10
4.7	Lab Duplicates	10
4.8	Field Duplicates	10
4.9	Laboratory Control Sample	11
4.10	ICP Serial Dilution	11
4.11	Furnace AA Quality Control	11
4.12	Sample Result Verification	11

Appendices

A	Data Summary Tables: Volatile Organics
B	Data Summary Tables: Semi-Volatile Organics
C	Data Summary Tables: Pesticides/PCBs
D	Data Summary Tables: Inorganics
E	Data Summary Tables: Tentatively Identified Compounds
F	Data Qualifiers
G	NYSDEC ASP Summary Sheets
H	Case Narratives
I	Chain-of-Custody Forms

DATA VALIDATION SUMMARY: ORGANIC and INORGANIC ANALYSES

Michael Wolfer Site
Sample Delivery Group No. 11257
Sampling Date of November 18, 1992

INTRODUCTION

This Data Validation Summary report for organic and inorganic analyses was generated for 4 soil samples and the associated quality control samples for Sample Delivery Group (SDG) No. 11257. Sampling activities were conducted in support of the field investigation at the Michael Wolfer Site. The analytical laboratory work was performed by Galson Laboratories.

Analytical testing consisted of volatile organic analyses by Gas Chromatography/Mass Spectroscopy (GC/MS); Base/Neutral and Acid Extractable Organics by GC/MS; Pesticides and Polychlorinated Biphenyls (PCBs) by GC; Inorganics by Atomic Absorption (AA) and Inductively Coupled Argon Plasma (ICP); Mercury by Cold Vapor; and Cyanides by Spectrophotometry. The analytical work was performed utilizing New York State Department of Environmental Conservation (NYSDEC) Analytical Service Protocols (ASP), December 1991.

This report provides a summary of data acceptability and deviations in accordance with the United States Environmental Protection Agency's (USEPA's) Contract Laboratory Program National Functional Guidelines for Organic Data Review (Draft- Revised June 1991); USEPA Region II Organic and Inorganic Data Validation Checklists/ Guidelines (January 1992); and, the CLP portion of the NYSDEC ASP (December 1991), where applicable and relevant. The validation report pertains to the following samples:

M.WOLF-1
M.WOLF-2
M.WOLF-3
M.WOLF-4

1.0 VOLATILE ORGANICS BY GC/MS

The following items/criteria were reviewed:

- * Holding Times
- * System Monitoring Compound Recovery
- * Matrix Spikes (MS) and Matrix Spike Duplicates (MSD)
- * Initial and Continuing Calibration
- * Blanks (Method and Field)
- * GC/MS Instrument Performance Check
- * Tentatively Identified Compounds (TICs)
- * Internal Standards
- * Field Duplicates
- * Target Compound List (TCL) Compound Identification
- * Compound Quantitation and Reported Detection Limits
- * System Performance

All items above were generated within acceptable Quality Control (QC) specifications, with deviations detailed as follows. All data is considered to be valid and usable with the appropriate qualifiers, as noted on the data summary tables and within the following text.

1.1 Holding Times

All holding times were met within the acceptable time frame of 7 days from Verified Time of Sample Receipt (VTSR) for the soil samples.

1.2 System Monitoring Compound Recovery

All system monitoring recovery was found to be generated within acceptable limits for the three surrogate compounds, with the following exception.

Sample ID

M.WOLF-2 Bromofluorobenzene 118% R (Limit 59-113)

Positive results for the sample were qualified as 'J', estimated, due to high recovery.

1.3 Matrix Spike/Matrix Spike Duplicates (MS/MSD)

One MS/MSD sample set was generated within acceptable limits for Relative Percent Difference (RPD) and Percent Recovery (%R). One Matrix Spike Blank sample was also analyzed and found to be within specification for %R. It should be noted that the MS/MSD samples that were analyzed for SDG No. 11257 were collected for another site which was batched with the Michael Wolfer Site samples.

1.4 Calibration

All initial and continuing calibration was performed within acceptable limits for average Relative Response Factors (\overline{RRF}), Percent Relative Standard Deviation (% RSD), Relative Response Factors (RRF), and percent Difference (% D), with the following exceptions.

1.4.1 Initial Calibration

Date

10/20/92	Acetone	31.1% RSD	(Limit 30%)
	2-Butanone	33.9%	
	4-methyl-2-pentanone	31.2%	

The samples were qualified as 'J', estimated, for the positive results, only, for the compounds noted above.

1.4.2 Continuing Calibration

Date, Time

11/24/92, 14:57	Acetone	30.9% D	(Limit 25%)
	2-Butanone	32.6%	
	4-methyl-2-pentanone	33.3%	
	2-Hexanone	28.2%	
	Tetrachloroethene	26.2%	
	1,1,2,2-tetrachloroethane	32.6%	
11/25/92, 10:27	2-Butanone	28.7% D	

The samples associated with the calibrations above were qualified as 'J', estimated, for the positive results, and 'UJ', estimated, for the non-detectable results.

1.5 Blanks

1.5.1 Field Blanks

Field and trip blanks were not collected for the Sample Delivery Group.

1.5.2 Method Blanks

Two method blanks were analyzed for the soil samples. Contamination by TCL Volatile Organics was detected, as follows.

VBLK2	4-methyl-2-pentanone	4 ug/Kg, estimated
-------	----------------------	--------------------

The compound 4-methyl-2-pentanone was not detected in any of the samples, therefore, qualification was not required.

1.6 GC/MS Instrument Performance Check

Instrument performance was generated within acceptable limits for Bromofluorobenzene (BFB).

1.7 Tentatively Identified Compounds (TICs)

TICs, which were generated in accordance with protocol, are summarized on Data Summary Tables in Appendix E.

1.8 Internal Standards

All internal standards were generated within acceptable specifications for area counts and retention time variation.

1.9 Field Duplicates

Field duplicate samples were not collected for the Michael Wolfer Site. However, one field duplicate was collected for another site included within SDG No. 11257.

1.10 TCL Identification

GC/MS qualitative analyses are considered to be acceptable for the data set. Retention times and mass spectra were generated within appropriate quality control specifications.

1.11 Compound Quantitation and Reported Detection Limits

GC/MS quantitative analyses are considered to be acceptable. Sample dilutions, internal standards and response factors were found to be within acceptable limits.

1.12 System Performance

Acceptable system performance was maintained throughout the analyses of the soil samples. This was exhibited through good resolution and consistent chromatographic performance.

2.0 SEMI-VOLATILE ORGANICS BY GC/MS (Base/Neutral and Acid Extractable Organics)

The following items/criteria were reviewed:

- * Holding Times
- * Surrogate Recovery
- * MS/MSD
- * Initial and Continuing Calibration
- * Blanks (Method and Field)
- * GC/MS Instrument Performance Check
- * TICs
- * Internal Standards
- * Field Duplicates
- * TCL Compound Identification
- * Compound Quantitation and Reported Detection Limits
- * System Performance

All items above were generated within acceptable QC specifications, with deviations detailed as follows. Two TIC's were qualified as 'R', unusable, due to the fact that they are Volatile TCL compounds. The remaining data is considered to be valid and usable with the appropriate qualifiers, as noted on the data summary tables and within the following text.

2.1 Holding Times

All holding times were met for extraction and analysis for the soil samples. The NYSDEC holding time is 5 days from VTSR for extraction, and 40 days from extraction to analysis.

2.2 Surrogate Recovery

All surrogate recovery was found to be generated within acceptable limits for the six surrogate compounds. It should be noted that the two advisory surrogate compounds were not analyzed for the semi-volatile analyses.

2.3 MS/MSD

One set of MS/MSD samples was analyzed for Semi-volatiles for SDG No. 11257. Percent recovery and relative percent difference were found to be acceptable. One Matrix Spike Blank was analyzed and found to be within specification for percent recovery. It is noted that the MS/MSD sample set was collected from another site which was batched with the Michael Wolfer Site samples.

2.4 Calibration

All initial and continuing calibrations were performed within acceptable limits for \overline{RRF} , % RSD, RRF, and % D, with the exception of the following.

2.4.1 Initial Calibration

Date

12/04/92	2,4-Dinitrophenol	45.5% RSD (Limit 30%)
	4-Nitroaniline	34.6%
	3,3'-Dichlorobenzidine	31.6%

The compounds above were not detected, therefore, qualification was not required.

2.4.2 Continuing Calibration

Date, Time

12/18/92, 14:48	4-Chloroaniline	51.3% D (Limit 25%)
	3-Nitroaniline	42.3%
	2,4-Dinitrophenol	59.1%
	4-Nitrophenol	41.6%
	2,4-Dinitrotoluene	26.8%
	4-Nitroaniline	48.6%
	4,6-Dinitro-2-methylphenol	30.8%
	Hexachlorobenzene	32.9%
	Indeno(1,2,3-cd)pyrene	32.2%
Dibenz(a,h)anthracene	31.1%	
Benzo(g,h,i)perylene	38.0%	
12/21/92, 16:53	4-Chloroaniline	34.6% D (Limit 25%)
	Hexachlorocyclopentadiene	42.0%
	4-chlorophenyl-phenyl ether	28.9%
	Di-n-butyl phthalate	34.3%
	3,3'-Dichlorobenzidine	46.3%
	Indeno(1,2,3-cd)pyrene	32.0%
	Dibenz(a,h)anthracene	31.0%
Benzo(g,h,i)perylene	31.2%	

The samples associated with the calibrations above were qualified as 'J', estimated, for the positive results, and 'UJ', estimated, for the non-detectable results.

2.5 Blanks

2.5.1 Field Blanks

Field blanks were not collected for SDG No. 11257.

2.5.2 Method Blanks

Two method blanks were analyzed for the soil samples for Semi-volatile organics. Contamination by TCL Semi-volatiles was not detected. However, various unknown TICs were detected.

2.6 GC/MS Instrument Performance Check

Instrument performance was generated within acceptable limits for Decafluorotriphenylphosphine (DFTPP).

2.7 TICs

TICs were generated in accordance with protocol and are summarized in Appendix E. Methyl benzene, a TCL Volatile compound, was detected as a TIC. The results for the TCL Volatile are qualified as 'R', unusable.

2.8 Internal Standards

All internal standards were generated within acceptable specifications for area counts and retention time variation.

2.9 Field Duplicates

Field duplicate samples were not collected for the Michael Wolfer Site. However, one field duplicate was collected for another site included within SDG No. 11257.

2.10 TCL Compound Identification

GC/MS qualitative analyses are considered to be acceptable for the data set. Retention times and mass spectra were generated within appropriate quality control specifications.

2.11 Compound Quantitation and Reported Detection Limits

GC/MS quantitative analyses are considered to be acceptable for the data set. Sample dilutions, internal standards and response factors were found to be within acceptable limits.

2.12 System Performance

Acceptable system performance was maintained throughout the analyses of the soil samples. This was exhibited through good resolution and consistent chromatographic performance.

3.0 PESTICIDES/PCBs BY GC

The following items/criteria were reviewed:

- * Holding Times
- * Surrogate Recovery
- * MS and MSD
- * Blanks (Method and Field)
- * Instrument (GC) Performance
- * Calibration
- * Field Duplicates
- * Compound Identification
- * Compound Quantitation and Reported Detection Limits

All items above were generated within acceptable QC specifications, with deviations detailed as follows. All data is considered to be valid and usable with the appropriate qualifiers, as noted on the data summary tables and within the following text.

3.1 Holding Times

All holding times were met within acceptable time frames for extraction and analysis. The NYSDEC holding time is 5 days from VTSR for extraction and 40 days from extraction to analysis.

3.2 Surrogate Recovery

Surrogate recovery was generated within acceptable limits for %R for both surrogate compounds, with the following exceptions.

Sample ID

M.WOLF-2	TCX1	42% R	(Limit 60-150)
	TCX2	42%	
	DCB1	32%	
	DCB2	36%	
Method Blank	DCB1	57%	

Sample M.WOLF-2 was qualified as 'J', estimated, for the positive results, and 'UJ', estimated, for the non-detectable results. The method blank did not require qualification due to one deviation for recovery.

3.3 MS/MSD

One MS/MSD set was analyzed for Pesticides/PCBs for SDG No. 11257. The MS/MSD samples generated acceptable precision (RPD) and accuracy (%R), with the following exceptions.

MS	Endrin	135% R	(Limit 56-121)
MSD	Heptachlor	133%	(Limit 40-131)

One Matrix Spike Blank sample was analyzed for the Sample Delivery Group. Recovery was found to be acceptable with the exception of endrin. Endrin generated high recovery at 126% (Limit 56-121).

It should be noted that the MS/MSD samples were collected from another site which was batched with the Michael Wolfer Site.

Due to high recovery for endrin in both the Matrix Spike Blank and the Matrix Spike sample, positive results for endrin were qualified as 'J', estimated. The Matrix Spike Blank was the only sample qualified for the data set. Positive results were not detected for the remaining samples.

3.4 Blanks

3.4.1 Field Blanks

Field Blanks were not collected for Pesticides/PCBs for SDG No. 11257.

3.4.2 Method Blanks

One soil method blank was analyzed. Aroclor 1248 was detected at 42 ug/Kg. A limit of five times the method blank value was used for review and qualification of the associated samples. Sample M.WOLF-1 was qualified as 'U', not detected, for the positive Aroclor 1248 value. Positive results were not detected for the remaining samples.

3.5 Instrument GC Performance

Adequate chromatographic resolution and instrument sensitivity were achieved through the generation of data within acceptable limits for the Resolution Check Mixture and Performance Evaluation Mixtures. These included resolution between adjacent peaks, retention time windows, RPD, and percent breakdown for DDT/Endrin.

3.6 Calibration

All initial and continuing calibration was performed within acceptable limits for the individual standard mixtures, with the following exceptions, as noted below. Review items included resolution, retention time windows, calibration factors (CF), percent RSD for linearity, RPD and %R.

Pesticide GPC Calibration

Aldrin 68% R (Limit 80-110)

Aroclor GPC Calibration

Aroclor 1016 130% R (Limit 80-110)

Aldrin was qualified as 'J', estimated, for positive results, and 'UJ', estimated, for the non-detectable results, due to low percent recovery. Aroclor 1016 results did not require qualification due to the high recovery.

3.7 Field Duplicates

Field duplicate samples were not collected for the Michael Wolfer Site. However, one field duplicate was collected for another site included within SDG No. 11257.

3.8 Compound Identification

GC qualitative analyses are considered to be acceptable. However, quality control specifications were found to be unacceptable in the following instances for %D of the two GC columns.

<u>Sample</u>	<u>Compound</u>	<u>% D</u>
Blank Spike	Aldrin	47
M.WOLF-1	Aroclor-1248	35
Method Blank	Aroclor-1248	98

The samples above were qualified as 'J', estimated, for the compounds noted. Sample M.Wolf-1 was previously qualified as 'U', not detected, through *Section 3.4.2 Method Blanks*, and did not require additional qualification.

3.9 Compound Quantitation and Reported Detection Limits

GC quantitative analyses are considered to be acceptable for the soil samples. Supporting data was generated within the appropriate quality control specifications.

4.0 INORGANIC ANALYSES BY AA AND ICP (Mercury by Cold Vapor; Cyanides by Spectrophotometry)

The following items/criteria were reviewed:

- * Holding Times
- * Initial and Continuing Calibration
- * Contract Required Detection Limit (CRDL) Standards
- * Blanks (Initial, Continuing Calibration, and Preparation)
- * Field Blanks
- * ICP Interference Check Sample
- * Matrix Spike Sample Recovery
- * Laboratory Duplicates
- * Field Duplicates
- * Laboratory Control Sample (LCS)
- * ICP Serial Dilution
- * Furnace AA Quality Control
- * Sample Result Verification

All items above were generated within acceptable QC specifications, with deviations detailed as follows. All data is considered to be valid and usable with the appropriate qualifiers, as noted on the data summary tables and within the following text.

4.1 Holding Times

All holding times were met within the acceptable time frame from VTSR for metals (6 months), cyanide (12 days), and mercury (26 days).

4.2 Calibration

All initial and continuing calibration was performed within acceptable limits for percent recovery.

4.3 CRDL Standards for AA and ICP

Percent recoveries were found to be within the acceptable range of 80-120%.

4.4 Blanks

4.4.1 Laboratory (Method) Blanks

All initial calibration, continuing calibration, and preparation blanks were generated in accordance with acceptable limits.

4.4.2 Field Blanks

Field blanks were not collected for inorganic analyses for SDG No. 11257.

4.5 ICP Interference Check

The ICP Interference Check sample was generated within the acceptable limit of 80-120% for recovery.

4.6 Spiked Sample Recovery

All percent recoveries for the matrix spike sample were found to be within the 75-125% limit, with the following exception. Selenium was found to generate low recovery at 70.8%.

Selenium non-detectable results were qualified as 'UJ', estimated. Positive results were not detected for selenium.

4.7 Lab Duplicates

Precision (relative percent difference) for the soil samples was found to be acceptable for all the elements, with the following exceptions.

Lead	78.1% RPD
Zinc	48.7%

The samples were qualified as 'J', estimated, for lead and zinc.

4.8 Field Duplicates

Field duplicate samples were not collected for the Michael Wolfer Site. However, one field duplicate was collected for another site included within SDG No. 11257.

4.9 Laboratory Control Sample (LCS)

The laboratory control samples were generated within the acceptable limits.

4.10 ICP Serial Dilution

ICP Serial Dilution was found to be within the acceptable 10% limit for percent difference.

4.11 Furnace AA Quality Control

Quality control for furnace atomic absorption was found to be acceptable.

4.12 Sample Result Verification

Quantitative analyses are considered to be acceptable for the data set. Analyte quantitation was generated in accordance with protocols.

APPENDIX A

DATA SUMMARY TABLES

VOLATILE ORGANICS

APPENDIX B

DATA SUMMARY TABLES
SEMI-VOLATILE ORGANICS

MICHAEL WOLFER SITE

SEMI-VOLATILES/SOIL - DATA SUMMARY

SDG NO. 11257

All results reported in ug/Kg

Parameters - SemiVolatiles	M.WOLF-1	Q	M.WOLF-2	Q	M.WOLF-3	Q	M.WOLF-4	Q	Q1-0117BLK	Q	Q1-0117GPCBL	Q	Q1-0117BS	Q
Phenol													1700	
bis (2-chloroethyl) ether														
2-Chlorophenol													1600	
1,3-Dichlorobenzene														
1,4-Dichlorobenzene													1100	
1,2-Dichlorobenzene														
2-Methylphenol														
bis(2-Chloroisopropyl)ether														
4-methylphenol														
N-Nitroso-di-n-propylamine													1300	
Hexachloroethane														
Nitrobenzene														
Isophorone														
2-Nitrophenol														
2,4-Dimethylphenol														
bis(2-chloroethoxy)methane														
2,4-Dichlorophenol														
1,2,4-Trichlorobenzene													1200	
Naphthalene														
4-chloroaniline		UJ		UJ		UJ		UJ		UJ		UJ		UJ
Hexachlorobutadiene										UJ		UJ		UJ
4-chloro-3-methylphenol										UJ		UJ	1700	J
2-methylnaphthalene														
Hexachlorocyclopentadiene														
2,4,6-Trichlorophenol														
2,4,5-Trichlorophenol														
2-Chloronaphthalene														
2-Nitroaniline														
Dimethylphthalate														
Acenaphthylene														
3-Nitroaniline		UJ		UJ		UJ		UJ						

APPENDIX C

DATA SUMMARY TABLES

PESTICIDES and PCBs

APPENDIX D

DATA SUMMARY TABLES

INORGANICS

APPENDIX E

DATA SUMMARY TABLES
TENTATIVELY IDENTIFIED COMPOUNDS

APPENDIX F

DATA QUALIFIERS

ORGANIC DATA QUALIFIERS

- U - Indicates that the compound was analyzed for but not detected at or above the Contract Required Quantitation Limit (CRQL), or the compound is not detected due to qualification through the method or field blank.
- J - The associated numerical value is an estimated quantity.
- JN - The associated numeric value is estimated and presumptively present.
- UJ - The compound was analyzed for, but not detected. The sample quantitation limit is an estimated quantity due to variance in quality control limits.
- E - Reported value is estimated due to quantitation above the calibration range.
- D - Reported result taken from diluted sample analysis.
- A - Aldol condensation product.
- R - Reported value is unusable and rejected due to variance from quality control limits.
- NA - Not Analyzed.

INORGANIC DATA QUALIFIERS

- U - Indicates analyte was not detected at or below the Contract Required Detection Limit (CRDL).
- B - Indicates analyte result is between Instrument Detection Limit (IDL) and CRDL.
- J - Reported value is estimated due to variance from quality control limits.
- UJ - The element was analyzed for, but not detected. The sample quantitation limit is an estimate due to variance in quality control limits.
- E - Reported value is estimated because of the presence of interference.
- R - Reported value is unusable and rejected due to variance from quality control limits.
- N.A. Not Analyzed.

APPENDIX G

NYSDEC ASP SUMMARY SHEETS

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
 SAMPLE IDENTIFICATION AND ANALYTICAL REQUIREMENT SUMMARY

Task Number: 11257 Matrix: Soil Sediment Water Leachate

Customer Sample Code	Laboratory Sample Code	If CLP, indicate year of protocol 1987 1989 <u>1991</u>																	
		CC VOA	MS VOA	MS BNA	MS BN	MS A	Post PCB	LC PAH	ORG List#	TOX TOC	Phenol Total	Cr VI	ON (Tot Br)	FI Tol Sol	O.G	Metal List#	Wet List#	CN Amenable	
M. Wolf-Soil-1	11257-001		✓	✓			✓					✓				1			
M. Wolf-Soil-2	11257-002		✓	✓			✓					✓				1			
M. Wolf-Soil-3	11257-003		✓	✓			✓					✓				1			
M. Wolf-Soil-4	11257-004		✓	✓			✓					✓				1			
Rt. 242-Soil-1	11257-005		✓	✓			✓					✓				1			
Rt. 242-Soil-2	11257-006		✓	✓			✓					✓				1			
Rt. 242-Soil-2MS	11257-007		✓	✓			✓					✓				1			
Rt. 242-Soil-2MSD	11257-008		✓	✓			✓					✓				1			
Rt. 242-Soil-3	11257-009		✓	✓			✓					✓				1			
Rt. 242-X-1	11257-010		✓	✓			✓					✓				1			
MBS	11257-011		✓	✓			✓					✓				1			

Metals List 1 - Al, Sb, As, Ba, Be, Cd, Ca, Cr, Co, Cu, Fe, Pb, Mg, Mn, Hg, Ni, K, Se, Ag, Na, Ti, V, Zn

Disolved Metals List 1 - Al, Sb, As, Ba, Be, Cd, Ca, Cr, Co, Cu, Fe, Pb, Mg, Mn, Hg, Ni, K, Se, Ag, Na, Ti, V, Zn

Wet List 1

Organic List 1

Organic List 2

Organic List 3

Organic List 4

Organic List 5

Organic List 6

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
 SAMPLE PREPARATION AND ANALYSIS SUMMARY - VOLATILE

Sample ID	Matrix	Date Collected	Date Rec at Lab	Date Extracted	Date Analyzed
M.WOLF-1 11257-001	SOIL	18-NOV-92	20-NOV-92	NA	24-NOV-92
M.WOLF-2 11257-002	SOIL	18-NOV-92	20-NOV-92		24-NOV-92
M.WOLF-3 11257-003	SOIL	18-NOV-92	20-NOV-92		25-NOV-92
M.WOLF-4 11257-004	SOIL	18-NOV-92	20-NOV-92		24-NOV-92
RT.242-1 11257-005	SOIL	19-NOV-92	20-NOV-92		25-NOV-92
RT.242-2 11257-006	SOIL	19-NOV-92	20-NOV-92		24-NOV-92
RT.242-2MS 11257-007	SOIL	19-NOV-92	20-NOV-92		24-NOV-92
RT.242-2MSD 11257-008	SOIL	19-NOV-92	20-NOV-92		24-NOV-92
RT.242-3 11257-009	SOIL	19-NOV-92	20-NOV-92		25-NOV-92
RT.242-X-1 11257-010	SOIL	19-NOV-92	20-NOV-92	✓	25-NOV-92

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
 SAMPLE PREPARATION AND ANALYSIS SUMMARY - SEMIVOLATILE

Sample ID	Matrix	Date Collected	Date Rec at Lab	Date Extracted	Date Analyzed
M.WOLF-1 11257-001	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	18-DEC-92
M.WOLF-2 11257-002	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	18-DEC-92
M.WOLF-3 11257-003	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	18-DEC-92
M.WOLF-4 11257-004	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	18-DEC-92
RT.242-1 11257-005	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	18-DEC-92
RT.242-2 11257-006	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	22-DEC-92
RT.242-2MS 11257-007	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	21-DEC-92
RT.242-2MSD 11257-008	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	22-DEC-92
RT.242-3 11257-009	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	19-DEC-92
RT.242-X-1 11257-010	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	21-DEC-92

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
 SAMPLE PREPARATION AND ANALYSIS SUMMARY - ^{Semi-Volatiles} ORGANIC ANALYSIS

Sample ID	Matrix	Analytical Protocol	Extraction Method	Auxiliary clean up	Dil/Conc Factor
M.WOLF-1 11257-001	SOIL	NYS DEC ASP Cat B (91-2)	NYS DEC ASP Cat B (91-2)	SW846 3640	1
M.WOLF-2 11257-002	SOIL				1
M.WOLF-3 11257-003	SOIL				1
M.WOLF-4 11257-004	SOIL				1
RT.242-1 11257-005	SOIL				1
RT.242-2 11257-006	SOIL				2
RT.242-2MS 11257-007	SOIL				2
RT.242-2MSD 11257-008	SOIL				2
RT.242-3 11257-009	SOIL				1
RT.242-X-1 11257-010	SOIL	↓	↓	↓	1

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
 SAMPLE PREPARATION AND ANALYSIS SUMMARY - Pesticide

Sample ID	Matrix	Date Collected	Date Rec at Lab	Date Extracted	Date Analyzed
M.WOLF-1 11257-001	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
M.WOLF-1 11257-001	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
M.WOLF-2 11257-002	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
M.WOLF-2 11257-002	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
M.WOLF-3 11257-003	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
M.WOLF-3 11257-003	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
M.WOLF-4 11257-004	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
M.WOLF-4 11257-004	SOIL	18-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
RT.242-1 11257-005	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
RT.242-1 11257-005	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
RT.242-2 11257-006	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
RT.242-2 11257-006	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
RT.242-2MS 11257-007	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
RT.242-2MS 11257-007	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
RT.242-2MSD 11257-008	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92
RT.242-2MSD 11257-008	SOIL	19-NOV-92	20-NOV-92	24-NOV-92	06-DEC-92

NEW YORK DEPARTMENT OF ENVIRONMENTAL CONSERVATION
 SAMPLE PREPARATION AND ANALYSIS SUMMARY - Pesticides/PCB

Sample ID	Matrix	Analytical Protocol	Extraction Method	Auxiliary Clean up	Dil/Conc Factor
M.WOLF-1 11257-001	SOIL	NYS DEC ASP 91-3	NYS DEC ASP 91-3	FLORISIL CARTRIDGE	1
M.WOLF-1 11257-001	SOIL				1
M.WOLF-2 11257-002	SOIL				1
M.WOLF-2 11257-002	SOIL				1
M.WOLF-3 11257-003	SOIL				1
M.WOLF-3 11257-003	SOIL				1
M.WOLF-4 11257-004	SOIL				1
RT. 242-X-1 11257-010	SOIL				1
RT. 242-X-1 11257-010	SOIL				1
RT. 242-1 11257-005	SOIL				1
RT. 242-1 11257-005	SOIL				1
RT. 242-2 11257-006	SOIL				4
RT. 242-2 11257-006	SOIL				4
RT. 242-2MS 11257-007	SOIL				4
RT. 242-2MS 11257-007	SOIL				4
RT. 242-2MSD 11257-008	SOIL				4
RT. 242-2MSD 11257-008	SOIL				4
RT. 242-3 11257-009	SOIL	✓	✓	✓	1

GALSON LABORATORIES

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
 SAMPLE PREPARATION AND ANALYSIS SUMMARY
 INORGANIC ANALYSIS

SAMPLE ID	MATRIX	DATE RECEIVED	METALS REQUESTED	ANALYTICAL PROTOCOL	DIGESTION METHOD
M.WOLF-1 11257-001	SOIL	11/20/92	TAL METALS LIST	NYSDEC 1991 ASP	CLP DIGESTION METHOD AND 245.5
M.WOLF-2 11257-002		11/20/92			
M.WOLF-3 11257-003		11/20/92			
M.WOLF-4 11257-004		11/20/92			
RT.242-X-1 11257-010		11/20/92			
RT.242-1 11257-005		11/20/92			
RT.242-2 11257-006		11/20/92			
RT.242-2MSD 11257-008D		11/20/92			
RT.242-2MS 11257-007S		11/20/92			
RT.242-3 11257-009	✓	11/20/92	✓	✓	✓

GALSON LABORATORIES

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
 SAMPLE PREPARATION AND ANALYSIS SUMMARY
 INORGANIC ANALYSIS

SAMPLE ID	DATE DIGESTED	DATE ANALYZED	DILUTION FACTOR
M.WOLF-1 11257-001	ICP :12/03/92 GFAA:12/02/92 HG :11/30/92	ICP:12/10/92 Sb :12/11/92 As :12/09/92 Pb :12/04/92 Se :12/10/92 Tl :12/07/92 Hg :12/01/92	Pb:10 REST:1
M.WOLF-2 11257-002	ICP :12/03/92 GFAA:12/02/92 Hg :11/30/92	ICP:12/10/92 Sb :12/11/92 As :12/09/92 Pb :12/04/92 Se :12/10/92 Tl :12/07/92 Hg :12/01/92	Pb:10 REST:1
M.WOLF-3 11257-003	ICP :12/03/92 GFAA:12/02/92 Hg :11/30/92	ICP:12/10/92 Sb :12/11/92 As :12/09/92 Pb :12/04/92 Se :12/10/92 Tl :12/07/92 Hg :12/01/92	Pb:5 REST:1
M.WOLF-4 11257-004	ICP :12/03/92 GFAA:12/02/92 Hg :11/30/92	ICP:12/10/92 Sb :12/11/92 As :12/09/92 Pb :12/04/92 Se :12/10/92 Tl :12/07/92 Hg :12/01/92	Pb:5 REST:1
RT.242-X-1 11257-010	ICP :12/03/92 GFAA:12/02/92 Hg :11/30/92	ICP:12/10/92 Sb :12/11/92 As :12/09/92 Pb :12/04/92 Se :12/10/92 Tl :12/07/92 Hg :12/01/92	Pb:5 REST:1

MATRIX MODIFIERS USED: Pb : ammonium phosphate/magnesium nitrate
 Sb : palladium/hydroxylamine sulfate
 As,Tl : nickel nitrate
 Se : 3% palladium

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
 SAMPLE PREPARATION AND ANALYSIS SUMMARY
 INORGANIC ANALYSIS

SAMPLE ID	MATRIX	DATE REC'D	INORGANICS REQUESTED	ANALYTICAL PROTOCOL
M.WOLF-1 11257-001	SOIL	11/20/92	CN	NYSDEC ASP CAT B
M.WOLF-2 11257-002	SOIL	11/20/92	CN	NYSDEC ASP CAT B
M.WOLF-3 11257-003	SOIL	11/20/92	CN	NYSDEC ASP CAT B
M.WOLF-4 11257-004	SOIL	11/20/92	CN	NYSDEC ASP CAT B
RT.242-X-1 11257-010	SOIL	11/20/92	CN	NYSDEC ASP CAT B
RT.242-1 11257-005	SOIL	11/20/92	CN	NYSDEC ASP CAT B
RT.242-2 11257-006	SOIL	11/20/92	CN	NYSDEC ASP CAT B
RT.242-2MSD 11257-008D	SOIL	11/20/92	CN	NYSDEC ASP CAT B
RT.242-2MS 11257-007S	SOIL	11/20/92	CN	NYSDEC ASP CAT B
RT.242-3 11257-009	SOIL	11/20/92	CN	NYSDEC ASP CAT B
				NYSDEC ASP CAT B
				NYSDEC ASP CAT B
				NYSDEC ASP CAT B
				NYSDEC ASP CAT B
				NYSDEC ASP CAT B
				NYSDEC ASP CAT B
				NYSDEC ASP CAT B
				NYSDEC ASP CAT B
				NYSDEC ASP CAT B

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
 SAMPLE PREPARATION AND ANALYSIS SUMMARY
 INORGANIC ANALYSIS

SAMPLE ID	DATE REC'D		DATE DIGESTED		DATE ANALYZED	DILUTION FACTOR
M.WOLF-1 11257-001	11/20/92	CN	11/24/92	CN	11/24/92	1
M.WOLF-2 11257-002	11/20/92	CN	11/30/92	CN	12/01/92	1
M.WOLF-3 11257-003	11/20/92	CN	11/30/92	CN	12/01/92	1
M.WOLF-4 11257-004	11/20/92	CN	11/30/92	CN	12/01/92	1
RT.242-X-1 11257-010	11/20/92	CN	11/30/92	CN	12/01/92	1
RT.242-1 11257-005	11/20/92	CN	11/30/92	CN	12/01/92	1
RT.242-2 11257-006	11/20/92	CN	11/30/92	CN	12/01/92	1
RT.242-2MSD 11257-008D	11/20/92	CN	11/30/92	CN	12/01/92	1
RT.242-2MS 11257-007S	11/20/92	CN	11/30/92	CN	12/01/92	1
RT.242-3 11257-009	11/20/92	CN	11/30/92	CN	12/01/92	1

APPENDIX H

CASE NARRATIVES



6601 Kirkville Road
E. Syracuse, NY 13057
Tel: (315) 432-0506
1-800-950-0506

December 30, 1992

Mr. Edward Fahrenkopf
Dunn Geoscience Corp.
12 Metro Park Road
Albany, New York 12205

SDG #11257

Dear Mr. Fahrenkopf:

The following package contains the analytical results of the samples collected on November 18 and 19, 1992 and submitted to our laboratory on November 20, 1992. The inorganic narrative immediately follows this letter in the summary package.

Volatiles

All QC requirements were met.

Semivolatiles

The two advisory surrogates listed in the 91 ASP were not included in the spiking mixture. They are also omitted from the curve and the daily standard. All other surrogate recoveries are within acceptable control limits. All matrix and blank spike recoveries are within limits. Sample RT 242-3 was analyzed 6 minutes past the 12 hour time window. This sample and its MS/MSD were diluted 1:2 before the GPC cleanup. Pentachlorophenol had an RSD of 25.6% in the calibration curve. The daily check standard of 12/18/92 had 5 compounds with >25% D. The standard quantitation report for that date indicates "NO CALIB" for 2-chlorobenzene-d4, 1,2-dichlorobenzene-d4, 2,4,6-Tribromophenol, and Carbazole. These compounds were included in the 5 point curve and the daily calibration check standard, and the response factors and %D are valid. The "NO CALIB" notation is due to the fact that the ID file had not been updated from the 89 to the 91 ASP protocol requirements at the time the standard was run.

Pesticide and Polychlorinated Biphenyl Compounds

The method blank contained Aroclor 1248 at 42 ug/Kg. Because of this contamination, the Aroclor 1248 concentration reported for sample M.Wolf-1 may be biased high. Both surrogates were low in the primary and confirmation run for sample M. Wolf-2. One surrogate was outside acceptable control limits in four other samples. Recovery of Endrin is high in the matrix spike and the matrix spike blank. Heptachlor is slightly high in the matrix spike duplicate.

Please do not hesitate to call if you require any further information regarding this report.

Sincerely,

A handwritten signature in dark ink, appearing to read "Gale G. Sutton". The signature is written in a cursive, flowing style.

Gale G. Sutton, CIH
Laboratory Director



6601 Kirkville Road
E. Syracuse, NY 13057
Tel: (315) 432-0506
1-800-950-0506

INORGANIC ANALYSIS NARRATIVE

11257

The following package contains data relating to the samples received in our laboratory on November 20, 1992. They were assigned to task number 11257 and SDG number 11257. Samples were analyzed according to the NYS DEC 1991 ASP.

The SDG consists of eight soil samples for the Inorganic Target Analyte List and cyanide. Sample RT.242-2 was selected for the spike/duplicate analyses.

Inductively Coupled Plasma (ICP)

The predigestion spike recoveries were within the control limits for all ICP elements. The predigestion duplicate recoveries were outside the control limits for magnesium and zinc; associated results are flagged with *. The most likely explanation for the poor predigestion duplicate recoveries is probably due to sample heterogeneity due to the presence of roots and rocks.

A serial dilution analysis was performed for all ICP elements that were greater than 50 times the IDL. All results were within the acceptable control limits.

All laboratory control samples and blank spikes were within the acceptable control limits.

Graphite Furnace Atomic Absorption (GFAA)

All predigestion spike recoveries were within the control limits for graphite furnace analysis except selenium; associated results are flagged with N. All predigestion duplicate recoveries were within the control limits for graphite furnace analysis except lead; associated results are flagged with *. The most likely explanation for the poor predigestion spike recovery for selenium is due to sample matrix interferences. The most likely explanation for the poor predigestion duplicate recovery for lead is probably attributable to sample heterogeneity due to the presence of roots and rocks.

The analytical spike recoveries were outside the acceptable control limits for most selenium analyses. Since the sample concentrations were less than 50 percent of the spike concentrations, associated results are flagged with W. Sample matrix interferences are suspected for selenium.

All laboratory control samples and blank spikes were within the acceptable control limits.



Mercury (CVAA)

No problems were encountered with the mercury analysis. All laboratory control samples and blank spikes were within the acceptable control limits.

Conventional Chemistry

The predigestion spike and duplicate were within the acceptable control limits for cyanide. The laboratory control sample and blank spike were within the acceptable control limits.

Mary G. Withrow

Mary G Withrow
Metals Section Supervisor

Lyndi W. Mott

Lyndi Mott
Conventional Chemistry Supervisor




APPENDIX I

CHAIN - OF - CUSTODY FORMS

Dunn Geoscience Corp.
12 Metro Park Road
Albany, N.Y. 12205 (518) 458-1313

10



Client Name: <u>NYSDEC</u>	DGC Contact: <u>E. Fahrenkopf / R. Reese</u>
Project No.: <u>00296-02486 AND 02488</u>	Laboratory Contact: <u>GAIL Sutton</u>
Site Location: <u>ROUTE 242 / Michael Wolf</u>	Lab Identification: <u>GARSON</u>
Sampler: <u>R. Reese / A. Hall</u>	Date Report Required: _____

Sample Identification	Date	Time	Sample Matrix	Collection Vessel	Lowering Device	# Sample Containers	Preserv.	Comp. or Grab	Comment
M. Wolf - Soil-1 11257-001	11/18/92	1300	Soil	spatula	bucket auger	2 - Amber	-	G	TCL VOA - NYSDEC-ASP 12/7
M. Wolf Soil-2 11257-002	"	1315	"	"	"	2 - 500ml Glass	-	G	TCL Semi/PCB/PEST/TAL/CN
M. Wolf Soil-3 11257-003	"	1400	"	"	"	2 - Amber	-	G	VOA
M. Wolf Soil-4 11257-004	"	1430	"	"	"	2 - 500ml Glass	-	G	VOA Semi/PCB/PEST/TAL/CN
Rt. 242 - Soil-1 11257-005	11/19/92	1100	"	"	"	1 - Amber	-	G	VOA
Rt. 242 - Soil-2 11257-006	"	1130	"	"	"	2 - 500ml Glass	-	G	Semi/PCB/PEST/TAL/CN
Rt. 242 - Soil-3 11257-009	"	1200	"	"	"	3 - Amber	-	G	VOA - ALSO MS/MSD
	11257-007	11257-008	"	"	"	6 - 500ml Glass	-	G	Semi/PCB/PEST/TAL/CN MS/MSD
	"	"	"	"	"	1 - Amber	-	G	VOA
	"	"	"	"	"	2 - 500ml Glass	-	G	Semi/PCB/PEST/TAL/CN

Name	Affiliation	Date	Time	Name	Date	Time
Relinquished by: <u>Randolph H. Reese</u>	<u>DGC</u>	<u>11/19/92</u>	<u>1500</u>	Received by Laboratory: <u>Judith P</u>	<u>11-20-92</u>	<u>10:11</u>
Received by:				Samples Intact & Properly Preserved: <u>(Yes)</u> or No		
Relinquished by:				Laboratory Comments: <u>x Samples very wet packed w/ice</u>		
Received by:				<u>Temp 24.0°C</u>		

RECORDED

MAR 24 1953

ENVIRONMENTAL DIVISION