

7 July 2023

Mr. Steeven Imbaquingo
Project Manager
New York State Department of Environmental Conservation
Division of Environmental Remediation
Bureau A, Section B, 12th Floor
625 Broadway
Albany, NY 12233-7015

RE: Letter Workplan for Site Characterization
Site/Spill No.: South Shore Outdoor—Off-Site
Contract/Work Assignment No. D009806-33
Site No. C152228A
Bay Shore, Suffolk County, New York

Dear Mr. Imbaquingo,

This Letter Work Plan describes the proposed activities for a site characterization of the off-site area (Site No. C152228A) associated with the South Shore Outdoor site (Site No. C152228), a property located at the corner of 5th Avenue and Candlewood Road in the town of Bay Shore, Suffolk County, New York (**Figure 1**). This work plan presents proposed site characterization activities consisting of in situ groundwater sampling, existing monitoring wells sampling, and soil vapor sampling in accordance with the issued Work Assignment and included Scope of Work and subsequent discussions.

1. SITE DESCRIPTION AND HISTORY

The South Shore Outdoor site is a 1.89-acre property located at 1760 5th Avenue, Bay Shore, Suffolk County, New York (**Figure 1**). The property is currently in the New York State Brownfield Cleanup Program which is administered by New York State Department of Environmental Conservation (NYSDEC). The site was developed sometime before 1969 and was a manufacturer of printed circuit boards. A window manufacturer and installer occupied the site sometime in the mid-1980s. Prior to the remedial action in 2017, the property was the source area of chlorinated volatile organic compounds, which were improperly disposed of in drywells located on-site. The remedial action in 2017 demolished the former building, excavated the impacted soils and sediment, and replaced the soils with clean fill, suitable for future commercial use at the site.

Currently, South Shore Outdoor site is being used as a retail store and the off-site area, mostly downgradient of the site, is comprised of residential and commercial properties.

2. CONCEPTUAL SITE MODEL

The following conceptual site model includes an abbreviated description of the findings from previous investigation and remediation activities.

2.1 Site Geology and Hydrogeology

The geology of the site is predominantly influenced by the Upper Glacial Aquifer Unit, which is comprised of tan, fine to medium sand, with some coarse sand and traces of fine gravels, to a depth of approximately 85 feet (ft) below ground surface (bgs). The Upper Glacial Aquifer Unit overlies the Gardiners Clay Unit, a fat clay, which is approximately 40-80 ft thick. The depth to groundwater on-site ranges from approximately 30 to 37 ft bgs. Groundwater flows to the southeast under a hydraulic gradient of approximately 0.001 feet per foot (ft/ft) based upon the groundwater elevation difference noted in on-site wells.

2.2 Surface Water Hydrology

Local topography concerning the site gently slopes to the southeast towards the Great South Bay. Stormwater run-off in the study area is generally directed to one of two retention basins; one directly south of Operable Unit 1 across Candlewood Road, and the other on the southeast corner of 5th Avenue and Claremont Avenue. These stormwater features likely affect the local groundwater elevation and flow direction in the study area.

2.3 Contaminants of Concern

The primary contaminants of concern (COCs) at the site are: 1,1-dichloroethane, 1,1,1-trichloroethane, chloroethane, and trichloroethene. These contaminants were identified in a former drywell in the southeast of the South Shore Outdoor site at levels that exceed protection of groundwater soil cleanup objectives. The maximum concentration was identified in the southeast of the site, consisting of 1,1,1-trichloroethane at 89,000 parts per million, which exceeded the soil cleanup objective of 0.68 parts per million. The 2007 preliminary site investigation identified a groundwater plume down gradient from this drywell. Following the 2017 remedial action, the NYSDEC selected to monitor natural attenuation of residual contamination at the site to understand how adjacent contamination breaks down over time. In September 2022, a groundwater sampling event on-site noted concentrations of 1,1,1-trichloroethane and 1,1-dichloroethane above New York State Class GA Ambient Water Quality Standard in monitoring well MW-5SR (**Figure 1**). The 2022 sampling event also indicated that since the removal action in 2017, site COCs have decreased substantially over time.

3. OBJECTIVES

NYSDEC issued EA Engineering, P.C. and its affiliate EA Science and Technology (EA) a work assignment to perform a site characterization at the area off-site of the South Shore Outdoor site property. Proposed activity locations can be found in **Figure 1**.

Proposed field activities will include:

- In situ groundwater sampling via direct push technology
- Groundwater sampling of two existing monitoring wells
- Soil vapor collection point installation and soil vapor sampling
- Documenting boring locations via Global Navigation Satellite System
- Groundwater gauging of on-site and off-site monitoring wells
- Containment and disposal of investigation-derived waste (IDW).

Work performed under this work assignment will be conducted in accordance with EA's Generic Quality Assurance Project Plan (EA 2020)¹, EA's Generic Field Activities Plan (EA 2023)², and EA's Generic Health and Safety Plan (EA 2020)³. A site-specific Health and Safety Plan Addendum has been provided as **Attachment A**. Field forms can be found in **Attachment B**.

4. SITE CHARACTERIZATION: FIELD ACTIVITIES

4.1 Utility Clearance and Synoptic Well Gauging

Prior to field activities, EA's subcontractor AARCO Environmental Services (AARCO) will acquire permits from the Town of Islip and Suffolk County as needed for the boring locations. Additionally, AARCO will contact Dig Safely New York so any public utilities can be marked out. AARCO will provide copies of all permits and Dig Safe New York notifications and responses to EA prior to mobilizing. AARCO will hand clear (soft dig) to 5 ft bgs to confirm no utility interference exists at each of the 14 proposed drilling locations.

Prior to the commencement of drilling activities EA will perform a synoptic gauging event of all on-site and off-site wells (**Figure 1 and Table 1**). Existing well information can be found in **Table 1**.

4.2 Borehole Advancement and In Situ Groundwater Sampling

AARCO will install 5 soil borings to an approximate depth of 45-50 ft bgs and 4 soil borings to an approximate depth of 58-60 ft bgs and collect in situ groundwater samples every 10 ft bgs beginning at the water table. Based on historical on-site and off-site monitoring well gauging data, EA estimates the groundwater table to be approximately 30 ft bgs, which will result in 2 groundwater samples from each boring collected at 35 and 45 ft bgs, and 3 groundwater samples from each boring collected at 35, 45, and 55 ft bgs. Soil borings will be installed with Geoprobe® via direct push technology, in situ groundwater samples will be captured with an SP-16 screen or equivalent

¹EA. 2020. *Generic Quality Assurance Project Plan for Work Assignments under NYSDEC Contract D009806*. Revision 01. April.

²EA. 2023. *Generic Field Activities Plan for Work Assignments under NYSDEC Contract D009806*. Revision 02. March.

³EA. 2020. *Generic Health and Safety Plan for Work Assignments under NYSDEC Contract D009806*. Revision 01. March.

sampling system. A clean SP16 sampler will be driven to the desired sampling depth each time. Extension rods will be used to hold the screen in position while the rods and sheath are retracted. An EA geologist will be responsible for collection of the groundwater sample once the sampler is set. Per- and polyfluoroalkyl substances sampling will be performed in accordance with the NYSDEC's April 2023 guidance, *Sampling, Analysis, and Assessment of Per- and Polyfluoroalkyl Substances (PFAS)* (**Attachment C**).

A peristaltic pump with high-density polyethylene tubing will be used to purge and collect samples. The interval will be purged until a low-turbidity sample (equal to or less than 50 nephelometric turbidity units [NTUs]) is achieved prior to sample collection. A set of water quality parameters will be recorded prior to sample collection. Sample identification and associated sample quality assurance (QA)/quality control (QC) can be found in **Table 2**.

If sample collection cannot be achieved with the method described above, then a one-inch diameter stainless steel bailer with rope will be utilized.

Once drilling activities have been completed the borehole will be backfilled to the ground surface with a bentonite grout mixture. The plan is to push the sampler to depth which will avoid generating drill cuttings (solid IDW). If field conditions do not allow for the above plan, soil cuttings will be containerized for off-site disposal in Department of Transportation approved 55-gallon drums. All locations will be restored to match existing surface conditions. Topsoil and grassy areas will be restored following completion of the work (e.g., track marks raked and seeded, depressions backfilled and seeded, etc.). Paved areas will be restored with asphalt cold-patch or concrete, per the Town of Islip and Suffolk County requirements.

Upon the completion of restoration activities EA will document borings and soil vapor points with a Global Navigation Satellite System following their completion and record their coordinates.

4.3 Soil Vapor Point Installation and Sampling

Three soil vapor points will be installed within the vadose zone utilizing direct push methods. The target depth for installation of soil vapor points is 10 ft bgs. The actual depth of installation will be based upon field conditions. A 6-inch stainless steel sampling screen attached to a dedicated section of 0.25-inch diameter Teflon or Teflon-lined tubing will be installed in the borehole to collect soil gas samples. Glass beads or comparable sand will be used to backfill the borehole to a minimum of 6 inches above the stainless-steel screen. Granular bentonite pellets will be placed above the glass beads to within 1 ft of grade, hydrated concurrently with placement. The remaining 1 ft of annular space will be backfilled with sand and a 6-inch diameter steel cover and concrete pad will be installed at grade (**Figure 2**). Soil vapor samples will be collected using 6-liter summa canisters and the samples will be collected over a 2-hour period.

4.4 Groundwater Sampling

In addition to the in situ groundwater sampling and soil vapor sampling, EA will conduct a round of groundwater sampling at select off-site monitoring wells. This includes monitoring wells CW-01 and FN-19 (**Figure 1**).

4.5 Laboratory Analysis of Groundwater and Soil Vapor Samples

In situ groundwater samples will be sent to Pace Analytical, via NYSDEC callout laboratory, for analysis of volatile organic compounds via U.S. Environmental Protection Agency (EPA) method 8260D. In situ groundwater samples collected from 5th Avenue Plaza will be submitted for additional analysis of per- and polyfluoroalkyl substances via EPA Method 1633, and 1,4-dioxane via 8270 selected ion monitoring. Assuming groundwater is at 30 ft bgs, it is anticipated that there will be a total of 22 in situ groundwater samples, 3 groundwater samples from existing monitoring wells, and 5 soil vapor samples, plus associated QC samples. QC samples will consist of a matrix spike/matrix spike duplicate at a 5 percent (%) rate, field duplicates at a 5% rate, an equipment blank once per day, and a trip blank with each cooler. Sample identification and associated sample QA/QC can be found in **Table 2**. All samples will be submitted for analysis on a standard turnaround time requesting sample results in the most recent NYSDEC EQuIS format and any associated Category B deliverables.

For soil vapor sampling, a leak test will be performed 24 hours after installing the soil vapor points. If the soil vapor points pass the leak test, they can be sampled immediately and sent to Pace Analytical for analysis via EPA Method TO-15. One duplicate sample will be collected.

4.6 Decontamination Procedures and Investigation Derived Waste

The SP16 sampler will be decontaminated with a non-phosphate detergent wash, potable water rinse, isopropanol rinse, potable water rinse, and deionized water rinse between sample intervals and between borings. New dedicated high-density polyethylene tubing will be used with the peristaltic pump between sampling intervals. An equipment blank will be taken once per day from the SP16 sampler and new dedicated high-density polyethylene tubing.

If the stainless steel bailer must be used, then it will be decontaminated between sampling intervals using the methods described above and an equipment blank taken once per day along with the SP16 sampler.

Gloves, tubing, and any other miscellaneous disposable materials will be disposed of as municipal trash at the end of each day.

Any soil cuttings generated from drilling activities and from the soil vapor point installations will be containerized in Department of Transportation approved 55-gallon steel drums, for transportation and disposal off-site. Drums will be staged at an approved location on the South Shore Outdoor site property. Refer to **Figure 1** for staging location.

Liquid IDW from groundwater sampling and decontamination activities will be treated via 5-gallon container of granular activated carbon and discharged to the ground surface, preferably impermeable surface. Residual granular activated carbon will be treated as solid waste and disposed of with soil cuttings. Solid IDW will undergo waste characterization prior to transportation off-site, to select the appropriate disposal facility. Characterization will consist of laboratory analysis of

Toxic Characteristic Leaching Procedure for volatile organic compounds and any other waste facility specific requirements.

5. SITE CHARACTERIZATION REPORT

EA will prepare a Letter Report summarizing field activities and analytical results following the Letter Work Plan. The report will include at a minimum:

- Summary of field activities, including daily field reports, photographs, soil vapor point construction logs, and water quality parameters from in situ samples. Groundwater analytical results in the form of laboratory report summaries, and a figure depicting current groundwater contours.
- Summary and interpretation of off-site COCs
- Updates to the conceptual site model.
- Conclusions and recommendations

Analytical data will be validated by a third-party data validator (Environmental Data Services LTD) and uploaded to the EQUIS database system.

Please feel free to contact me if you have any questions or concerns at: 315-565-6561.

Sincerely yours,

EA SCIENCE AND TECHNOLOGY



Kritika Thapa
Project Manager

EA ENGINEERING, P.C.



Donald Conan, P.E., P.G.
Program Manager

Tables

- | | |
|---|--------------------------------------|
| 1 | Monitoring Well Construction Details |
| 2 | Sample QA/QC and Sample ID Details |

Figures

- | | |
|---|---|
| 1 | Approximate Proposed Drilling Locations |
| 2 | Typical Soil Vapor Point Construction Diagram |

Attachments

- | | |
|---|---------------------------------|
| A | Health and Safety Plan Addendum |
| B | Field Forms |
| C | PFAS Sampling Guidance Document |

This page intentionally left blank

Tables

This page intentionally left blank

Table 1. Monitoring Well Construction Details

Monitoring Well ID	Well Location	Coordinates		Coordinates		Well TOC Elevation (ft)	Static Water Level (2022) (ft)	Static Water Level (2006) (ft)	Well Screen (ft)	Well Depth (ft)
		Latitude	Longitude	Northing	Easting					
MW-1R	Onsite	40.76830000	-73.26134700	220051.821	1188852.0610	76.82	33.44	--	38-43	42.88
MW-3R	Onsite	40.76902500	-73.26195300	220314.538	1188681.981	75.84	32.20	--	28-43	43.1
MW-5SR	Onsite	40.76843100	-73.26176700	220098.566	1188735.324	76.22	32.74	--	28-38	38.26
MW-5DR	Onsite	40.76843100	-73.26177500	220098.548	1188733.108	76.17	32.71	--	40-45	43.9
CW-01	Offsite	40.46059862	-73.15440319	220060.5009	1188607.0900	77.48	--	29.51	52-57	57.00
FN-19	Offsite	40.46054915	-73.15426187	220011.3581	1188716.2488	79.27	--	31.37	44-49	49.14

Notes:

ft = Foot (feet)

ID = Identification

TOC = Top of Casing

Data is largely sourced from 1/31/2007 Candlewood Source Area Site Characterization and the 12/07/2022 Groundwater Monitoring and Remedial Action Update Report.

This page intentionally left blank

Table 2. Sample QA/QC and Sample ID Details

Matrix	Sample Type	Location	Estimated Depth* [Assuming GW is at 30 (ft)]	Sample ID	Analysis
Field Samples					
Groundwater	DPT Grab Sample	Abingdon DPT #1	35	ABI-DPT-1-35	VOCs 8260D
Groundwater	DPT Grab Sample	Abingdon DPT #1	45	ABI-DPT-1-45	VOCs 8260D
Groundwater	DPT Grab Sample	Abingdon DPT #2	35	ABI-DPT-2-35	VOCs 8260D
Groundwater	DPT Grab Sample	Abingdon DPT #2	45	ABI-DPT-2-45	VOCs 8260D
Groundwater	DPT Grab Sample	Belgrave DPT #1	35	BEL-DPT-1-35	VOCs 8260D
Groundwater	DPT Grab Sample	Belgrave DPT #1	45	BEL-DPT-1-45	VOCs 8260D
Groundwater	DPT Grab Sample	Belgrave DPT #1	55	BEL-DPT-1-55	VOCs 8260D
Groundwater	DPT Grab Sample	Belgrave DPT #2	35	BEL-DPT-2-35	VOCs 8260D
Groundwater	DPT Grab Sample	Belgrave DPT #2	45	BEL-DPT-2-45	VOCs 8260D
Groundwater	DPT Grab Sample	Belgrave DPT #2	55	BEL-DPT-2-55	VOCs 8260D
Groundwater	DPT Grab Sample	Claremont DPT #1	35	CLAR-DPT-1-35	VOCs 8260D
Groundwater	DPT Grab Sample	Claremont DPT #1	45	CLAR-DPT-1-45	VOCs 8260D
Groundwater	DPT Grab Sample	Claremont DPT #1	55	CLAR-DPT-1-55	VOCs 8260D
Groundwater	DPT Grab Sample	Claremont DPT #2	35	CLAR-DPT-2-35	VOCs 8260D
Groundwater	DPT Grab Sample	Claremont DPT #2	45	CLAR-DPT-2-45	VOCs 8260D
Groundwater	DPT Grab Sample	Claremont DPT #2	55	CLAR-DPT-2-55	VOCs 8260D
Groundwater	DPT Grab Sample	Fifth Avenue DPT #1	35	5AVE-DPT-1-35	VOCs 8260D, PFAS 1633, 1,4-Dioxane 8270 SIM
Groundwater	DPT Grab Sample	Fifth Avenue DPT #1	45	5AVE-DPT-1-45	VOCs 8260D, PFAS 1633, 1,4-Dioxane 8270 SIM
Groundwater	DPT Grab Sample	Fifth Avenue DPT #2	35	5AVE-DPT-2-35	VOCs 8260D, PFAS 1633, 1,4-Dioxane 8270 SIM
Groundwater	DPT Grab Sample	Fifth Avenue DPT #2	45	5AVE-DPT-2-45	VOCs 8260D, PFAS 1633, 1,4-Dioxane 8270 SIM
Groundwater	DPT Grab Sample	Fifth Avenue DPT #3	35	5AVE-DPT-3-35	VOCs 8260D, PFAS 1633, 1,4-Dioxane 8270 SIM
Groundwater	DPT Grab Sample	Fifth Avenue DPT #3	45	5AVE-DPT-3-45	VOCs 8260D, PFAS 1633, 1,4-Dioxane 8270 SIM
Groundwater	Existing Monitoring Well	FN-19	44-49	FN-19-DDMMYYYY	VOCs 8260D
Groundwater	Existing Monitoring Well	CW-01	28-38	CW-01-DDMMYYYY	VOCs 8260D
Soil Vapor	Soil Vapor Point	Abingdon SV#1	0-10	ABI-SV-1-DDMMYYYY	VOCs TO-15
Soil Vapor	Soil Vapor Point	Fifth Avenue SV#1	0-10	5AVE-SV-1-DDMMYYYY	VOCs TO-15
Soil Vapor	Soil Vapor Point	Fifth Avenue SV#2	0-10	5AVE-SV-2-DDMMYYYY	VOCs TO-15
QC Samples					
Field Duplicate	DPT Grab Sample	Abingdon DPT #1	45	DPT-DUP-1	VOCs 8260D, PFAS 1633, 1,4-Dioxane 8270 SIM
Field Duplicate	Existing Monitoring Well	MW-1R	38-43	MW-DUP-1	VOCs 8260D
Field Duplicate	Soil Vapor Point	On-site-SV-2	0-10	SV-DUP-1	VOCs TO-15
Field Blank	QC	Daily	NA	DPT-FB-1-DDMMYYYY	VOCs 8260D
Field Blank	QC	Daily	NA	DPT-FB-2-DDMMYYYY	VOCs 8260D
Field Blank	QC	Daily	NA	DPT-FB-3-DDMMYYYY	VOCs 8260D
Field Blank	QC	Daily	NA	DPT-FB-4-DDMMYYYY	VOCs 8260D
Field Blank	QC	Daily	NA	DPT-FB-5-DDMMYYYY	VOCs 8260D, PFAS 1633, 1,4-Dioxane 8270 SIM
Equipment Blank	QC	Daily on nondedicated equipment	NA	DPT-EQB-1-DDMMYYYY	VOCs 8260D
Equipment Blank	QC	Daily on nondedicated equipment	NA	DPT-EQB-2-DDMMYYYY	VOCs 8260D
Equipment Blank	QC	Daily on nondedicated equipment	NA	DPT-EQB-3-DDMMYYYY	VOCs 8260D
Equipment Blank	QC	Daily on nondedicated equipment	NA	DPT-EQB-4-DDMMYYYY	VOCs 8260D
Equipment Blank	QC	Daily on nondedicated equipment	NA	DPT-EQB-5-DDMMYYYY	VOCs 8260D, PFAS 1633, 1,4-Dioxane 8270 SIM
Equipment Blank	QC	Daily on nondedicated equipment	NA	MW-EQB-1-DDMMYYYY	VOCs 8260D
IDW Samples					
Solid IDW	IDW	Composite sample of solid IDW drums (1 per 10 drums)	NA	IDW-1-DDMMYYYY	TCLP - VOCs (8260D)

Notes:

*Sampling depth for groundwater is estimated and will need to be confirmed and adjusted if needed based on field conditions.

DPT = Direct push technology

ft = Foot (feet)

GW = Groundwater

IDW = Investigation-derived waste

NA = Not applicable

PFAS = Per- and polyfluoroalkyl substances

QA = Quality assurance

QC = Quality control

SIM = Selected ion monitoring

VOC = Volatile organic compound

Equipment Blanks will be performed daily when nondedicated equipment is used. Field Blank and equipment blank quantities are estimated and subject to change based on duration of field activities.

Matrix spike/matrix spike duplicate samples will be collected at a ratio of 1 per 20 samples.

Trip Blanks will be assigned to each shipment as "TB-DDMMYYYY"


PFAS 1633 method includes 40 compounds.

This page intentionally left blank

Figures

This page intentionally left blank

\\svracusep\Syracuse\Projects\State&Local\NY\SDC - D009806\Work Assignments\1602533 - South Shore Outdoor RI FS\South Shore Outdoor RI FS.aprx

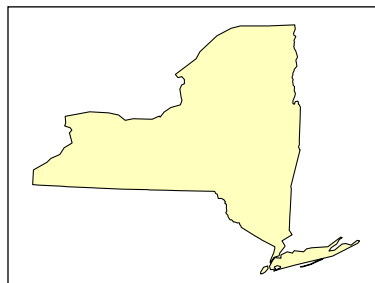

0 125 250
Feet
1 inch = 170 feet

Legend

- South Shore Outdoor Site (NYSDEC Site No. C152228)
- Proposed Staging Area
- A Monitoring Well
- Proposed Soil Vapor Points
- Proposed Direct-Push Groundwater Sample Locations
- \$ Site Location

Note:
MW-5SR and MW-5DR
are a nested pair.

Figure 1
Approximate Proposed
Drilling Locations
South Shore Outdoor-Off-Site
(NYSDEC Site No. C152228A)
Bay Shore, NY

Map Date: 7/5/2023
Projection: NAD83 State Plane New York Long Island




Department of
Environmental
Conservation



FULL SIZE PLOT: 8.5" x 11"

SCALE AS SHOWN

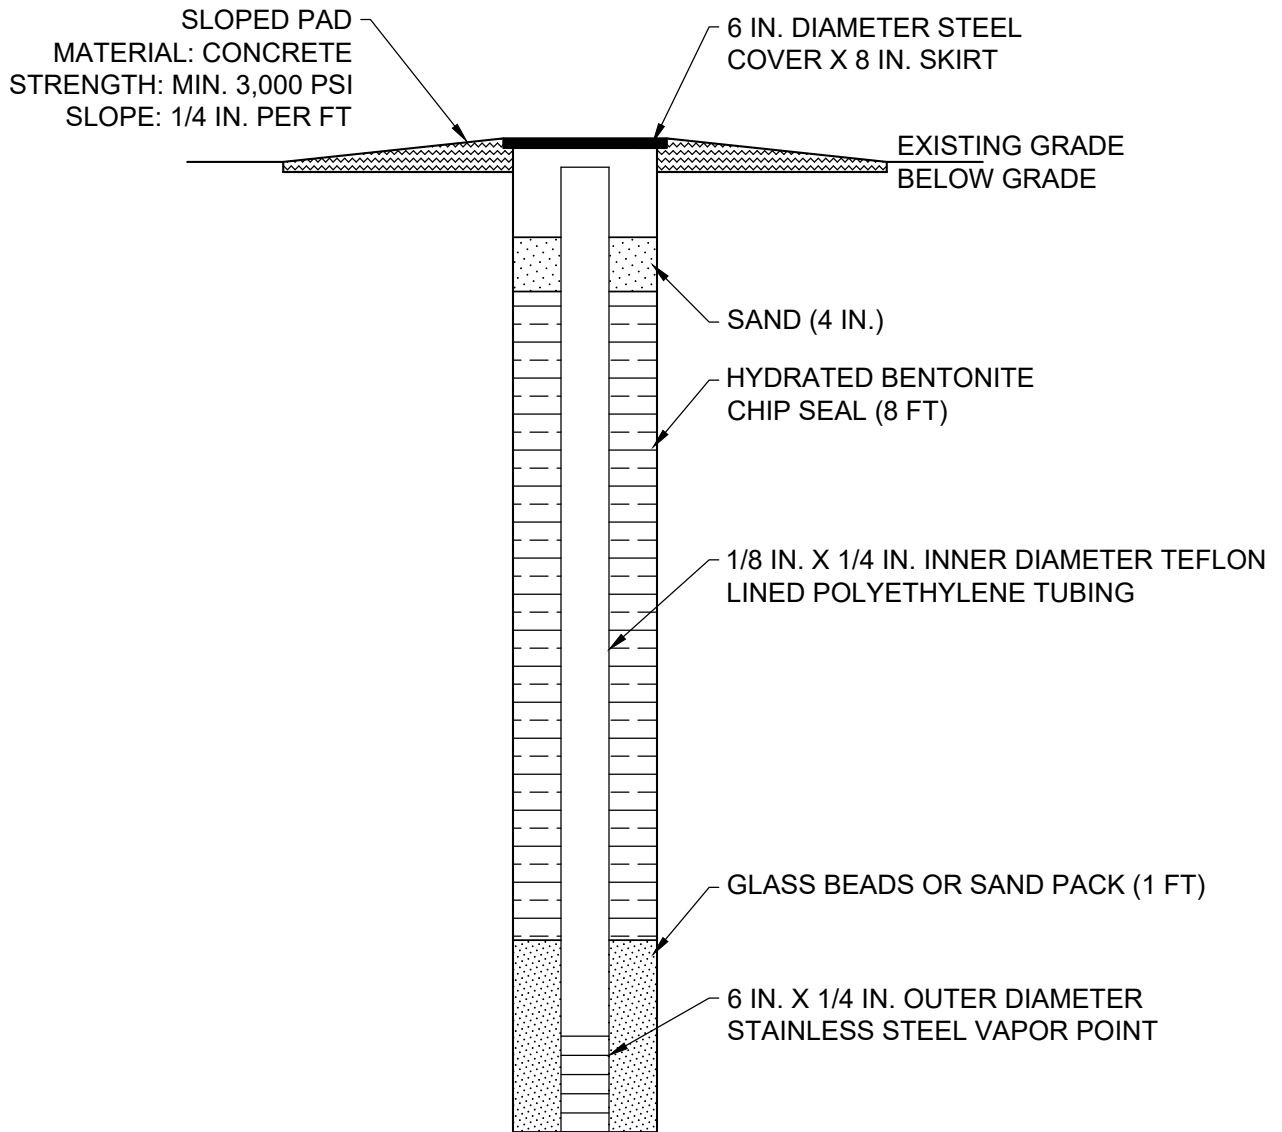

TOTAL DEPTH OF SOIL VAPOR SAMPLER SET AT
10 FT BGS OR 2 FT ABOVE WATER TABLE.



**EA Engineering, P.C.
and Its Affiliate
EA Science and Technology**

269 W Jefferson Street
Syracuse, New York 13202
(315) 431-4610

www.eaest.com

PROJECT NAME

NYSDEC SOUTH SHORE OUTDOOR -
OFF-SITE

PROJECT ADDRESS

BAY SHORE, SUFFOLK COUNTY, NY

DRAWING TITLE

TYPICAL SOIL VAPOR POINT
CONSTRUCTION DIAGRAM

FIGURE

2

DRAWING INFORMATION

DRAWN BY: KMK

DESIGNED BY: KT

CHECKED BY: DC

PROJECT MANAGER: KT

DATE: 20 JUNE 2023

PROJECT NO: 1602533

Attachment A

Health and Safety Plan Addendum

This page intentionally left blank



Health and Safety Plan Addendum South Shore Outdoor –Off-Site (C152228A) Bay Shore, New York

Prepared for

New York State Department of Environmental Conservation
625 Broadway
Albany, New York 12233



Prepared by

EA Engineering, P.C., and Its Affiliate
EA Science and Technology
269 W. Jefferson Street
Syracuse, New York 13202

Revisions to Health and Safety Plan Addendum:

Revision No.	Date Submitted	Summary of Revision	NYSDEC Approval Date
0	5 May 2023	Original Submittal	9 June 2023
1	26 June 2023	Corrected contact information of NYSDEC PM and added contact information of EA Personnel	27 June 2023
2	7 July 2023	Updated Scope of Work per NYSDEC's direction	

July 2023
Revision: 2
EA Project No. 1602533

This page intentionally left blank

Health and Safety Plan Addendum South Shore Outdoor – Off-Site (C152228A) Bay Shore, New York

Prepared for

New York State Department of Environmental Conservation
625 Broadway
Albany, New York 12233



Prepared by

EA Engineering, P.C. and Its Affiliate
EA Science and Technology
269 W. Jefferson Street
Syracuse, New York 13202

A handwritten signature in black ink, appearing to read "Donald F. Conan".

Donald F. Conan, P.E., Contract Manager
EA Engineering, P.C.

7 July 2023

Date

A handwritten signature in black ink, appearing to read "Kritika Thapa".

Kritika Thapa, Project Manager
EA Science and Technology

7 July 2023

Date

July 2023
Revision: 2
EA Project No. 1602533

This page intentionally left blank

TABLE OF CONTENTS

	<u>Page</u>
LIST OF APPENDIXES.....	iii
LIST OF ACRONYMS AND ABBREVIATIONS	iv
1. INTRODUCTION	1
1.1 GENERAL.....	1
1.2 SITE DESCRIPTION AND HISTORY	2
1.3 POLICY STATEMENT	2
2. KEY PERSONNEL	3
3. SCOPE OF WORK.....	5
3.1 EVALUATION OF UTILITIES AND SYNOPTIC WELL GAUGING OF EXISTING MONITORING WELLS.....	5
3.2 BOREHOLE ADVANCEMENT AND IN SITU GROUNDWATER SAMPLING	5
3.3 GROUNDWATER SAMPLING.....	6
3.4 EVALUATION OF SOIL VAPOR.....	6
3.5 WASTE STORAGE AND DISPOSAL.....	7
4. POTENTIAL HAZARD ANALYSIS	9
5. GENERAL SAFETY PRACTICES	11
5.1 SAFE WORK PRACTICES	11
5.2 DAILY STARTUP AND SHUTDOWN PROCEDURES	11
5.3 TRAFFIC SAFETY AND PEDESTRIAN PROTECTION MEASURES.....	12
6. PERSONAL PROTECTIVE EQUIPMENT	13
6.1 UPGRADE OR DOWNGRADE PERSONAL PROTECTIVE EQUIPMENT LEVEL.....	13
7. SITE CONTROL AND SECURITY	15
8. SITE MONITORING	17
8.1 WORK AREA MONITORING.....	17
8.2 COMMUNITY AIR MONITORING PLAN	17
8.2.1 Continuous Air Monitoring.....	17

8.2.2	Periodic Air Monitoring.....	17
8.3	ACTION LEVELS AND RESPONSE	17
8.3.1	Volatile Organic Compounds	18
9.	REFERENCES	19

LIST OF APPENDIXES

- Appendix A: Worker Training And Physical Examination Record
- Appendix B: Health And Safety Plan Addendum Review Record
- Appendix C: Site Entry And Exit Log
- Appendix D: Accident/Loss Report
- Appendix E: Emergency Telephone Numbers And Hospital Directions
- Appendix F: Emergency Equipment Available On-site
- Appendix G: Personal Protective Equipment Activity Record
- Appendix H: Safety Data Sheets

LIST OF ACRONYMS AND ABBREVIATIONS

AARCO	AARCO Environmental
bgs	Below ground surface
CFR	Code of Federal Regulations
CHMM	Certified Hazardous Material Manager
CIH	Certified Industrial Hygienist
CSP	Certified Safety Professional
CVOC	Chlorinated volatile organic compound
EA	EA Engineering, P.C. and Its Affiliate EA Science and Technology
ft	Foot (feet)
G.I.T	Geologist in Training
HASP	Health and Safety Plan
IDW	Investigation-derived waste
No.	Number
NYSDEC	New York State Department of Environmental Conservation
OSHA	Occupational Safety and Health Administration
P.E.	Professional Engineer
P.G.	Professional Geologist
PID	Photoionization detector
PM	Project Manager
PPE	Personal protective equipment
ppm	Part(s) per million
SSHO	Site Safety and Health Officer
STS	Safety Trained Supervisor
VOC	Volatile organic compound

1. INTRODUCTION

1.1 GENERAL

A Generic Health and Safety Plan (HASP) (EA Engineering, P.C. and its affiliate EA Science and Technology [EA] 2020a) was developed for field activities performed under the New York State Department of Environmental Conservation (NYSDEC) Standby Contract Number (No.) D009806. This HASP Addendum is provided as an attachment to the Letter Work Plan to supplement the Generic HASP with site-specific information to protect the health and safety of personnel while performing field investigation activities to complete a site characterization for the off-site area of the South Shore Outdoor Site (Site), Bay Shore, Suffolk County, New York (NYSDEC Site No. C152228A).

This HASP Addendum describes the safety organization, procedures, and protective equipment that have been established based on an analysis of potential physical, chemical, and biological hazards. Specific hazard control methodologies have been evaluated and selected to minimize the potential for accidents or injuries to occur. One copy of the Generic HASP (EA 2020a) and this HASP Addendum will be maintained for use during the scheduled field investigation activities. The copies will be made available for site use and employee review at all times.

This HASP Addendum addresses regulations and guidance practices set forth in the Occupational Safety and Health Administration (OSHA) Standards for Construction Industry, 29 Code of Federal Regulations (CFR) 1926, including 29 CFR 1926.65, Hazardous Waste Operations and Emergency Response and 29 CFR 1926.59, Hazardous Communications.

The following are provided as appendixes:

- **Appendix A:** Worker Training and Physical Examination Record
- **Appendix B:** Health and Safety Plan Addendum Review Record
- **Appendix C:** Site Entry and Exit Log
- **Appendix D:** Accident/Loss Report
- **Appendix E:** Emergency Telephone Numbers and Hospital Directions
- **Appendix F:** Emergency Equipment Available On-site
- **Appendix G:** Personal Protective Equipment Activity Record
- **Appendix H:** Safety Data Sheets.

Note: This site-specific HASP Addendum should be left open to display **Appendix E** (Emergency Telephone Numbers and Hospital Directions) and made available to all site personnel in a conspicuous location for the duration of field investigation activities in the event of an emergency.

1.2 SITE DESCRIPTION AND HISTORY

The South Shore Outdoor site is a 1.89-acre property located at 1760 5th Avenue, Bay Shore, Suffolk County, New York (Figure 1 of the Letter Work Plan). The property is currently in the New York State Brownfield Cleanup Program which is administered by NYSDEC. Prior to the remedial action in 2017, the property was the source area of chlorinated volatile organic compounds (CVOCs), which were improperly disposed of in drywells located on-site. The remedial action in 2017 demolished the former building, excavated the impacted soils and sediment, and replaced the soils with clean fill, suitable for future commercial use at the Site.

1.3 POLICY STATEMENT

EA will take every reasonable step to provide a safe and healthy work environment, and to eliminate or control hazards in order to minimize the possibility of injuries, illnesses, or accidents to site personnel. EA and EA's subcontractor employees will be familiar with this HASP Addendum for the project activities that they are involved in. Prior to entering the Site, the HASP Addendum will be reviewed and an agreement to comply with the requirements will be signed by EA personnel, subcontractors, and visitors (**Appendix B**).

Operational changes that could affect the health and safety of site personnel, the community, or the environment will not be made without approval from the Project Manager (PM) and the Program Health and Safety Officer. This document will be periodically reviewed to ensure that it is current and technically correct. Any changes in site conditions and/or the scope of work will require a review and modification to the HASP Addendum. Such changes will be documented in the form of a revision to this Addendum.

2. KEY PERSONNEL

The following table contains information on key project personnel:

Title	Name	Telephone No.
NYSDEC PM	Steeven Imbaquingo	P: 518-402-9739
Program Health and Safety Officer	Robert Marcase, CIH, CSP, CHMM	P: 410-329-5192
Program Manager	Donald Conan, P.E., P.G.	M: 315- 877-7403
Quality Assurance/Quality Control Officer	Frank Barranco, P.E., P.G.	P: 410-584-7000
PM	Kritika Thapa	P: 315-565-6561 M: 478-390-2213
Site Manager/Site Health and Safety Officer	Edward Ashton, P.G., STS	P: 315-565-6560 M: 315-551-1161
Site Geologist	Patrick Gannon, G.I.T.	P: 315-234-0547 M: 845-238-8203

Notes:

CIH = Certified Industrial Hygienist

CSP = Certified Safety Professional

CHMM = Certified Hazardous Material Manager

G.I.T. = Geologist in Training

P.E. = Professional Engineer

P.G. = Professional Geologist

STS = Safety Trained Supervisor

This page left intentionally blank

3. SCOPE OF WORK

This HASP Addendum was developed to designate and define site-specific health and safety protocols applicable to project activities to be implemented and followed during field activities and consulting work at the Site. The scope of work covered by this HASP Addendum includes the following:

- In situ groundwater sampling via direct push technology
- Groundwater sampling of two existing monitoring wells
- Soil vapor collection point installation and soil vapor sampling
- Documenting boring locations via Global Navigation Satellite System
- Groundwater gauging of on-site and off-site monitoring wells
- Containment and disposal of investigation-derived waste (IDW).

Each of these activities is summarized below and additional detail for each activity is provided in the Letter Work Plan.

3.1 EVALUATION OF UTILITIES AND SYNOPTIC WELL GAUGING OF EXISTING MONITORING WELLS

Prior to field activities, EA's subcontractor AARCO Environmental Services (AARCO) will acquire permits from the town of Islip and Suffolk County as needed for the boring locations. Additionally, AARCO will contact Dig Safely New York so any public utilities can be marked out. AARCO will provide copies of all permits and Dig Safe New York notifications and responses to EA prior to mobilizing. AARCO will hand clear (soft dig) to 5 ft bgs to confirm no utility interference exists at each of the 14 proposed drilling locations.

Prior to the commencement of drilling activities EA will perform a synoptic gauging event of all off-site wells (Figure 1 of the Letter Work Plan). Existing well information can be found in Table 1 of the Letter Work Plan.

3.2 BOREHOLE ADVANCEMENT AND IN SITU GROUNDWATER SAMPLING

AARCO will install 5 soil borings to an approximate depth of 45-50 ft bgs and 4 soil borings to an approximate depth of 58-60 ft bgs and collect in situ groundwater samples every 10 ft bgs beginning at the water table. Based on historical on-site and off-site monitoring well gauging data, EA estimates groundwater table to be approximately 30 ft bgs which will result in 2 groundwater samples from each boring collected at 35 and 45 ft bgs, and 3 groundwater samples from each boring collected at 35, 45, and 55 ft bgs. Soil borings will be installed with Geoprobe® via direct

push technology, in situ groundwater samples will be captured with an SP-16 screen or equivalent sampling system. A clean SP16 sampler will be driven to the desired sampling depth each time. Extension rods will be used to hold the screen in position while the rods and sheath are retracted. An EA geologist will be responsible for collection of the groundwater sample once the sampler is set.

A peristaltic pump with high-density polyethylene tubing will be used to purge and collect samples. The interval will be purged until a low-turbidity sample (equal to or less than 50 nephelometric turbidity units [NTUs]) is achieved prior to sample collection. A set of water quality parameters will be recorded prior to sample collection.

If sample collection cannot be achieved with the method described above, then a 1-inch diameter stainless steel bailer with rope will be utilized.

Once drilling activities have been completed the borehole will be backfilled to the ground surface with a bentonite grout mixture. The plan is to push the sampler to depth which will avoid generating drill cuttings (solid IDW). If field conditions do not allow for the above plan, soil cuttings will be containerized for off-site disposal in Department of Transportation approved 55-gallon drums. All locations will be restored to match existing surface conditions. Topsoil and grassy areas will be restored following completion of the work (e.g., track marks raked and seeded, depressions backfilled and seeded, etc.). Paved areas will be restored with asphalt cold-patch or concrete, per the Town of Islip and Suffolk County requirements.

Upon the completion of restoration activities EA will document borings and soil vapor points with a Global Navigation Satellite System following their completion and record their coordinates.

3.3 GROUNDWATER SAMPLING

In addition to the in situ groundwater sampling and soil vapor sampling, EA will conduct a round of groundwater sampling at select existing off-site monitoring wells. This includes monitoring wells CW-01 and FN-19.

3.4 EVALUATION OF SOIL VAPOR

Three soil vapor points will be installed within the vadose zone utilizing direct push methods. The target depth for installation of soil vapor points is 10 ft bgs. The actual depth of installation will be based upon field conditions. A 6-inch stainless steel sampling screen attached to a dedicated section of 0.25-inch diameter Teflon or Teflon-lined tubing will be installed in the borehole to collect soil gas samples. Glass beads or comparable sand will be used to backfill the borehole to a minimum of 6-inches above the stainless-steel screen. Granular bentonite pellets will be placed above the glass beads to within 1 ft of grade, hydrated concurrently with placement. The remaining 1 ft of annular space will be backfilled with sand and 6-inch diameter steel cover and concrete pad will be installed at grade (Figure 2 of the Letter Work Plan).

3.5 WASTE STORAGE AND DISPOSAL

EA is responsible for the proper storage, handling, and disposal of IDW including personal protective equipment (PPE); solids and liquids generated during soil boring, in situ groundwater sampling, groundwater sampling from monitoring wells, soil vapor point installation, and soil vapor sampling activities.

IDW including PPE, solids and liquids generated during the in situ groundwater sampling, soil vapor point installation, and soil vapor sampling activities, will be stored, handled, and disposed of in accordance with the EA's Generic Field Activities Plan (EA 2023). Drummed materials will be clearly labeled as to their contents and origin. Soil cuttings will be stored on-site and managed in accordance with NYSDEC Division of Environmental Remediation-10, pending analytical results from the waste characterization.

Accordingly, handling and disposal will be as follows:

- Liquids generated from contaminated equipment decontamination that exhibit visual staining, sheen, or discernable odors will be collected in drums or other containers at the point of generation. They will be stored in the staging area. A licensed waste subcontractor will then remove the drums and dispose at an off-site location.
- Liquid generated during well purging or a decontamination activities will be treated via 5-gallon container of granular activated carbon and discharged to the stormwater drain. Residual granular activated carbon will be treated as solid waste and disposed of with soil cuttings.
- Soil cuttings from the soil vapor point installations will be containerized and staged on-site until an appropriate treatment/disposal procedure has been determined after the completion of the site characterization.
- Used protective clothing, equipment, and trash will be placed in a trash dumpster and disposed of by a local garbage hauler.

This page intentionally left blank

4. POTENTIAL HAZARD ANALYSIS

Based on the field activities detailed in Section 3, the following potential hazard conditions may be anticipated. Further details regarding each hazard are present in Section 3 of the Generic HASP (EA 2020):

- Chemical Hazards: chemicals of concern present at the site include, but are not limited to, CVOCs.
- Heavy Equipment Hazards.
- Vehicle and Pedestrian Hazards.
- Electrical Hazards, including High Voltage Hazards.
- Underground Utilities.
- Fire/Explosion.
- Heat/Cold Stress.
- Biological Hazards.
- Noise Hazards.
- Lifting Hazards.
- Slips, Trips, and Falls.
- Entry into a confined space in support of this project is not anticipated and is forbidden.
- Safety data sheets for chemicals that may be used on-site are provided in **Appendix H**.

This page intentionally left blank

5. GENERAL SAFETY PRACTICES

5.1 SAFE WORK PRACTICES

Safe work practices that will be followed by site workers include, but are not limited to, the following rules:

- Working before or after daylight hours without special permission is prohibited.
- Do not enter restricted or posted areas without permission from the Site Safety and Health Officer (SSHO).
- Smoking on-site is prohibited.
- Possessing, using, purchasing, distributing, or having controlled substances in their system throughout the day or during meal breaks is prohibited.
- Consuming or possessing alcoholic beverages is prohibited.
- Good housekeeping; employees will be instructed about housekeeping throughout field activities.
- Sitting or kneeling in areas of obvious contamination is prohibited.
- Avoid overgrown vegetation and tall grass areas.
- Avoid overhead wires and subsurface utilities.

5.2 DAILY STARTUP AND SHUTDOWN PROCEDURES

The following protocols will be followed daily prior to start of work activities:

- The SSHO will review site conditions to determine if modification of work and safety plans is needed.
- Personnel will be briefed and updated on new safety procedures as appropriate.
- Safety equipment will be checked for proper function and calibrated.
- The SSHO will ensure that the first aid kit is adequately stocked and readily available.
- On-site equipment and supplies will be locked and secure.

5.3 TRAFFIC SAFETY AND PEDESTRIAN PROTECTION MEASURES

The following protocols will be followed to protect the public while field activities are occurring:

- Cones and caution tape will be used around open boreholes/well vaults and adjacent work areas to prevent pedestrians from entering the work area.
- Cones and caution tape will be used around the drill rig and work areas to prevent pedestrians from entering the work area.
- Drilling and sampling activities will avoid blocking pedestrian walkways. If a walkway is partially blocked due to sampling activities an alternate pathway will be provided.
- When mobilizing the drill rig to drilling locations, an individual not operating the rig will be directing pedestrian and vehicular traffic as needed.

6. PERSONAL PROTECTIVE EQUIPMENT

Based upon currently available information, it is anticipated that Level D PPE will be required for currently anticipated conditions and activities.

The PPE components for use during this project are detailed in the Generic HASP (EA 2020a). The components of Level D PPE are summarized below. Level D will be worn for initial entry on-site and for all activities and will consist of the following:

- Coveralls or appropriate work clothing.
- Safety Vests with reflective material to comply with OSHA Class 1 safety vest regulation.
- Steel toe, steel shank safety boots/shoes that comply with American National Standards Institute Z41-1991.
- Hard hats (when overhead hazards are present or as required by the SSHO) to comply with OSHA 29 CFR 1910.135 standard.
- Chemical resistant gloves (nitrile/neoprene) when contact with potentially contaminated soil or water is expected. Hand protection needs to comply with OSHA 1910.138 standard.
- Safety glasses with side shields to comply with OSHA 1926.102 standard.
- Hearing protectors (during operations producing excessive noise) to comply with OSHA 1926.101 standard.

Insulated clothing, hats, etc. must be worn when temperatures or wind chill fall below 40 degrees Fahrenheit.

6.1 UPGRADE OR DOWNGRADE PERSONAL PROTECTIVE EQUIPMENT LEVEL

Procedures and levels for upgrades or downgrades to the PPE level required at the site are outlined in the Generic HASP. Changes in PPE levels must be documented in the PPE Activity Report provided in **Attachment G** of this HASP Addendum.

If, at any time, the sustained level of total organic vapors in the worker breathing zone exceeds 5 parts per million (ppm) above background, site workers will evacuate the area and the condition will be brought to the attention of the SSHO and EA PM. Efforts will be undertaken to mitigate the source of the vapors (e.g., ventilation fans). Once the sustained level of total organic vapors decreases to below 5 ppm above background, site workers will be allowed to continue activities at

the direction of the SSHO. If dust levels exceed the OSHA permissible exposure limit; dust masks will be worn by all on-site personnel until dust suppression using water methods reduce the levels.

7. SITE CONTROL AND SECURITY

Only authorized personnel will be permitted to conduct field activities. Authorized personnel include those who have completed hazardous waste operations initial training, as defined under OSHA 29 CFR 1910.120/29 CFR 1926.65, have completed their training or refresher training within the past 12 months, and have been certified by a physician as fit for hazardous waste operations. A list of staff and training is provided in **Attachment A**.

This page intentionally left blank

8. SITE MONITORING

8.1 WORK AREA MONITORING

Specific compounds of concern for the South Shore Outdoor-Off-site site include CVOCs. Permissible exposure limits applicable for site related contaminants are presented in Table 1 of the Generic HASP (EA 2020a). For intrusive work (i.e., during in situ sampling and soil vapor point installation), the work area will be monitored continuously with a photoionization detector and combustible gas indicator. Action levels and response actions are defined in Section 6.1 of this HASP Addendum.

8.2 COMMUNITY AIR MONITORING PLAN

Community air monitoring activities will consist of a combination of continuous and periodic monitoring, which will be performed dependent upon the type of activity conducted at the site, as discussed in the following section. Volatile organic compound (VOC) monitoring will be performed using a MiniRAE 3000 or equivalent, which is capable of calculating instantaneous concentrations, 15-minute time-weighted averages, and an average of the previous running time period. These levels will be compared to the levels specified in Section 8.3.

8.2.1 Continuous Air Monitoring

Continuous monitoring for CVOCs and particulates will be required for ground intrusive activities including soil boring and soil vapor point installations and management of IDW. Monitoring will take place at the perimeter of the exclusion zone and should include upwind and downwind concentrations at the start of each workday and as-needed thereafter (i.e., wind direction changes, change in work location, modification of exclusion zone, etc.). Weather conditions, including prevailing wind direction, will be observed and recorded for each day of activities.

8.2.2 Periodic Air Monitoring

Periodic monitoring for CVOCs will be required during non-intrusive activities. Non-intrusive activities are anticipated to include the collection of groundwater, soil vapor samples, and IDW management. Periodic monitoring during sample collection will consist of taking a reading as follows: upon arrival at a sample location, opening a well cap, during IDW management, and prior to leaving a sample location.

8.3 ACTION LEVELS AND RESPONSE

This subsection identifies the action levels and corresponding responses for concentrations of VOCs and particulates detected during the field activities.

8.3.1 Volatile Organic Compounds

VOCs were identified in on-site soil and groundwater samples including CVOCs. VOC action levels are as follows:

- If ambient air concentrations of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 ppm above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background conditions (upwind concentrations), work activities will resume with continued monitoring.
- If the total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist in excess of 5 ppm over background but less than 25 ppm, work activities will be stopped, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities will resume provided that the total organic vapor level 200 ft downwind of the work zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less (but in no case less than 20 ft), is below 5 ppm over background for the 15-minute average.
- If the total organic vapor level is above 25 ppm at the perimeter of the work area, work activities will be shut down.

All 15-minute readings will be recorded and be available for NYSDEC and New York State Department of Health personnel to review. Instantaneous readings, if any, used for decision purposes will also be recorded.

9. REFERENCES

EA Engineering, P.C. and its affiliate EA Science and Technology (EA). 2020. *Generic HASP for Work Assignments under NYSDEC Contract No. D009806*. March.

EA Engineering, P.C. and its affiliate EA Science and Technology (EA). 2023. *Generic Field Activities Plan for Work Assignments under NYSDEC Contract D0009806*. March.

New York State Department of Environmental Conservation. 2010. DER-10 Technical Guidance for Site Investigation and Remediation. May.

This page intentionally left blank

Appendix A

Worker Training and Physical Examination Record

This page intentionally left blank

Worker Training and Physical Examination Record

SITE: South Shore Outdoor-Off-Site, Bay Shore, New York						
Name	OSHA 40-hour Hazardous Waste Operations Training		OSHA Hazardous Waste Supervisor Training	CPR (date of expiration)	First Aid (date of expiration)	Date of Last Physical Examination
	Initial	Annual				
EA PERSONNEL						
Kritika Thapa	12/4/2015	05/29/2023	—	1/17/2025	1/17/2025	9/20/2022
Edward Ashton	4/10/1992	10/20/2022	—	5/17/2023	5/17/2023	10/03/2022
Jeremy Fontaine	3/31/2020	12/14/2022	—	2/4/2025	2/4/2025	3/20/2023
Patrick Gannon	9/11/2020	12/14/2022	4/5/2021	12/11/2024	12/11/2024	9/22/2022
Moriah Gilkey	4/2/2021	3/6/2023	3/6/2022	2/4/2025	2/4/2025	4/13/2023
SUBCONTRACTOR OR ADDITIONAL PERSONNEL						
To be determined	—	—	—	—	—	—

Prior to performing work at the site, this Health and Safety Plan Addendum must be reviewed and an agreement to comply with the requirements must be signed by all personnel, including contractors, subcontractors, and visitors. Contractors and subcontractors are ultimately responsible for ensuring that their own personnel are adequately protected. In signing this agreement, the contractors and subcontractors acknowledge their responsibility for the implementation of the Health and Safety Plan Addendum requirements. All personnel onsite shall be informed of the site emergency response procedures and any potential safety or health hazards of the operations.

Notes:

CPR = Cardiopulmonary resuscitation

EA = EA Engineering, P.C. and Its Affiliate EA Science and Technology

OSHA = Occupational Safety and Health Administration

This page intentionally left blank

Appendix B

Health and Safety Plan Addendum Review Record

This page intentionally left blank

I have read the Health and Safety Plan Addendum for this site and have been briefed on the nature, level, and degree of exposure likely as a result of participation in this project. I agree to conform to all the requirements of this Plan.

[illegible]

This page intentionally left blank

Appendix C

Site Entry and Exit Log

This page intentionally left blank

[illegible]

This page intentionally left blank

Appendix D

Accident/Loss Report

This page intentionally left blank



ACCIDENT/LOSS REPORT

This report must be completed by the injured employee or supervisor and faxed to EA corporate headquarters within 24 hours of any accident. **Fax number: (410) 771-1780.**

Note: Whenever an employee is sent for medical treatment for a work related injury or illness, **page 4 of this report** must accompany that individual to ensure that all invoices, bills, and correspondence are sent to Human Resources for a timely response.

A. DEMOGRAPHIC INFORMATION	
Name of injured employee:	
Home address:	
Home telephone:	
Date of birth:	Age: Sex: M F
Marital status:	Name of spouse (if applicable):
Social security number:	Date of hire:
Number of dependents:	
Employee job title:	Department regularly employed:
Was employee injured on the job: yes or no	
Primary language of employee:	

B. ACCIDENT/INCIDENT INFORMATION	
Date of accident:	Time of accident:
Reported to whom:	Name of supervisor:
Exact location where accident occurred (include street, city, state, and county):	
Explain what happened (include what the employee was doing at the time of the accident and how it occurred):	
Describe the injury and the specific part of the body affected (i.e., laceration, right hand, third finger):	
Object or substance that directly injured the employee:	
Number of days and hours employee usually works per week:	
Is the employee expected to lose at least one full day of work?	
Does the employee have a previous claim? yes or no	If yes, status? open or closed
Was the employee assigned to restricted duty? yes or no	If yes, describe:



ACCIDENT/LOSS REPORT

C. ACCIDENT INVESTIGATION INFORMATION
Was safety equipment provided? yes or no If yes, was it used? yes or no
Was an unsafe act being formed? yes or no If yes, describe:
Was a machine part involved? yes or no If yes, in what way?
Was the machine part defective? yes or no If yes, in what way?
Was a third party responsible for the accident/incident: yes or no If yes, list name, address, and telephone number.
Was the accident/incident witnessed? yes or no If yes, list name, address, and telephone number.

D. PROVIDER INFORMATION
Was first aid given onsite? yes or no
If yes, what type of medical treatment given?
Physician information (if medical attention was administered): Name: Address (include city, state, and zip): Telephone: Hospital address (include name, address, city, state, zip code, and telephone number):
Was the employee hospitalized? yes or no If yes, on what date?
Was the employee treated as an outpatient, receive emergency treatment or ambulance service? yes or no
Please attach the physician's written return to work slip.
Note: A physician's return to work slip is required prior to allowing the worker to return to work.

E. AUTOMOBILE ACCIDENT INFORMATION (complete if applicable)
Authority contacted and report number:
EA employee's vehicle year, make, and model:
V.I.N. _____ Plate/tag number: _____
Owner's name and address:
Driver's name and address:
Relationship to insured?
Driver's license number?



ACCIDENT/LOSS REPORT

E. AUTOMOBILE ACCIDENT INFORMATION (continued)
Describe damage to <i>your</i> property:
Describe damage to <i>other</i> vehicle or property:
<i>Other</i> driver's name, address, and telephone:
<i>Other</i> driver's insurance company (include name, address and telephone number):
Location of other vehicle?
Name, address, and telephone of other injured parties:
Witness (include name, address, and telephone number):
Witness's statement:
Witness (include name, address, and telephone number):
Witness's statement:
F. ACKNOWLEDGEMENT
Name of supervisor:
Date of this report:
Report prepared by:
I have read this report and the contents as to how the accident/loss occurred are accurate to the best of my knowledge.
Signature (injured employee):
Date:



ACCIDENT/LOSS REPORT

I am seeking medical treatment for a work related injury/illness.
Please forward all bills/invoices/correspondence to:

**EA Engineering, Science, and Technology, Inc., PBC
225 Schilling Circle
Suite 400
Hunt Valley, Maryland 21031**

Attention: Michele Bailey

Human Resources

(410) 584-7000

Appendix E

Emergency Telephone Numbers and Hospital Directions


This page intentionally left blank

EMERGENCY TELEPHONE NUMBERS AND HOSPITAL DIRECTIONS

Emergency Telephone Numbers

SITE: South Shore Outdoor-Off-Site, Bay Shore, New York	
Police	9-1-1
Fire	9-1-1
Ambulance	9-1-1
Hospital: South Shore University Hospital	(631) 968-3000
Poison Control	(800) 222-1222
Program Safety and Health Officer: Robert Marcase, CIH, CSP, CHMM	(410) 329-5192
Program Manager: Donald Conan, P.E., P.G.	(315) 877-7403
EA Project Manager Kritika Thapa	(315) 565-656153 Office (478) 390-2213 Cell
In case of spill, contact James Hayward, P.E.	(315) 565-6555
EA Medical Services (Physician) All One Health Services	(800) 229-3674
Site Manager/Site Health and Safety Officer: Edward Ashton	(315) 565-6560 Office (315) 551-1161 Cell
Site Geologist: Jeremy Fontaine	(401) 603-6609
Site Geologist: Patrick Gannon	(916) 604-4366 Office (845) 238-8203 Cell
In case of accident or exposure incident, contact Corporate Health and Safety Officer Robert Marcase, CIH, CSP, CHMM	(410) 329-5192

Hospital Directions

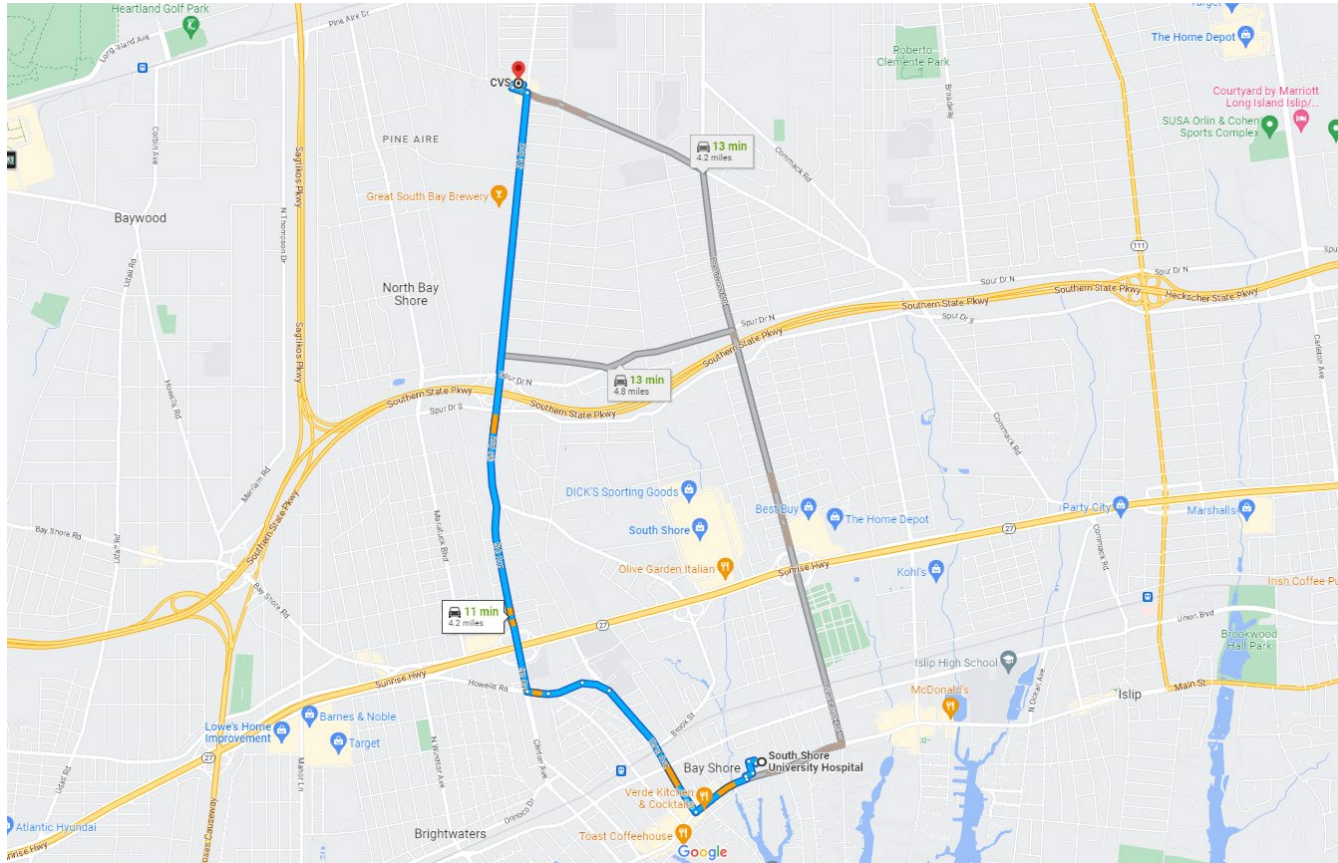

1. Head south on 5th Avenue Continue for 2.6 miles.
2. Turn left onto Howells Road, continue for 0.2 miles.
3. Continue straight onto Roosevelt Street, continue for 0.2 miles.
4. Slight right onto 3rd Avenue, continue for 0.7 miles.
5. Turn left onto E Main Street, continue for 0.3 miles.
6. Turn left onto Mowbray Place. South Shore University Hospital will be on the right. Follow signs to emergency services.

Appendix F

Emergency Equipment Available On-site

This page intentionally left blank

EMERGENCY EQUIPMENT AVAILABLE ON-SITE

Type of Equipment	Location
Communications Equipment	
Mobile Telephone	On Person
Medical Support Equipment	
First Aid Kits	In EA vehicle
Eye Wash Station	In EA vehicle
Firefighting Equipment	
Fire Extinguishers	In EA vehicle

This page intentionally left blank

Appendix G

Personal Protective Equipment Activity Record

This page intentionally left blank

PERSONAL PROTECTIVE EQUIPMENT ACTIVITY RECORD

SITE: South Shore Outdoor-Off-Site, Bay Shore, New York		
Weather Condition:	Onsite Hours: From To	
Changes in Personal Protective Equipment Levels ^(a)	Work Operations	Reasons for Change
Site Health and Safety Plan Violations	Corrective Action Specified	Corrective Action Taken (yes/no)
Observations and Comments:		
Completed by:		
Site Health and Safety Officer		Date
(a) Only the Site Health and Safety Officer may change personal protective equipment levels, using only criteria specified in the Health and Safety Plan Addendum.		

This page intentionally left blank

Appendix H

Safety Data Sheets

This page intentionally left blank

SAFETY DATA SHEET
BENTONITE**1 IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND COMPANY/UNDERTAKING**

PRODUCT NAME BENTONITE
APPLICATION Viscosifier.
SUPPLIER M-I Drilling Fluids UK Ltd,
Pocra Quay,
Footdee,
Aberdeen. AB11 5DQ
T -44 (0)1224-584336
F -44 (0)1224-576119
EMERGENCY TELEPHONE +44(0)208 762 8322

2 COMPOSITION/INFORMATION ON INGREDIENTS

Name	EC No.	CAS-No.	Content	Classification
BENTONITE	215-108-5	1302-78-9	80 - 95%	-
QUARTZ, CRYSTALLINE SILICA	238-878-4	14808-60-7	2 -15%	Xn;R20.

The Full Text for all R-Phrases are Displayed in Section 16

COMPOSITION COMMENTS

This material is a naturally occurring mineral. The Data Shown is in accordance with the latest EC Directives. This product contains a small quantity of quartz, crystalline silica. Prolonged and repeated exposure to concentrations of crystalline silica exceeding the maximum exposure limit may lead to chronic lung disease such as silicosis.

3 HAZARDS IDENTIFICATION

Not regarded as a health or environmental hazard under current legislation.

HUMAN HEALTH

This product contains a small quantity of quartz. IARC Monographs, Vol.68, 1997, concludes that there is sufficient evidence that inhaled crystalline silica in the form of quartz or cristobalite from occupational sources causes cancer in humans. IARC classification Group 1.

4 FIRST-AID MEASURES**INHALATION**

Move the exposed person to fresh air at once. Get medical attention if any discomfort continues.

INGESTION

First aid is not normally required. Rinse mouth thoroughly. Drink plenty of water.

SKIN CONTACT

Wash skin thoroughly with soap and water. Remove contaminated clothing. Get medical attention if any discomfort continues.

EYE CONTACT

Promptly wash eyes with plenty of water while lifting the eye lids. Continue to rinse for at least 15 minutes. Get medical attention if any discomfort continues.

5 FIRE-FIGHTING MEASURES**EXTINGUISHING MEDIA**

The product is non-combustible. Use fire-extinguishing media appropriate for surrounding materials.

UNUSUAL FIRE & EXPLOSION HAZARDS

No unusual fire or explosion hazards noted.

PROTECTIVE MEASURES IN FIRE

Self contained breathing apparatus and full protective clothing must be worn in case of fire.

6 ACCIDENTAL RELEASE MEASURES**PERSONAL PRECAUTIONS**

Wear protective clothing as described in Section 8 of this safety data sheet.

ENVIRONMENTAL PRECAUTIONS

Do not allow to enter drains, sewers or watercourses.

BENTONITE**SPILL CLEAN UP METHODS**

Shovel into dry containers. Cover and move the containers. Flush the area with water. May be slippery when wet.

7 HANDLING AND STORAGE**USAGE PRECAUTIONS**

Avoid handling which leads to dust formation. Provide good ventilation. Mechanical ventilation or local exhaust ventilation may be required.

STORAGE PRECAUTIONS

Store at moderate temperatures in dry, well ventilated area.

8 EXPOSURE CONTROLS/PERSONAL PROTECTION

Name	Std	LT - ppm	LT - mg/m3	ST - ppm	ST - mg/m3
QUARTZ, CRYSTALLINE SILICA	WEL		0.3 mg/m3 resp. dust		
BENTONITE			4 mg/m3 resp. dust		

INGREDIENT COMMENTS

WEL = Workplace Exposure Limits * OSHA PELs for Mineral Dusts containing crystalline silica are 10 mg/m3 / (%SiO₂+2) for quartz and 1/2 the calculated quartz value for cristobalite and tridymite. NUI = Nuisance Dust. WEL TWA 4mg/m3 respirable dust, 10mg/m3 total dust.

PROTECTIVE EQUIPMENT**ENGINEERING MEASURES**

Provide adequate general and local exhaust ventilation.

RESPIRATORY EQUIPMENT

Respiratory protection must be used if air contamination exceeds acceptable level. Dust filter P3 (for especially fine dust/powder).

HAND PROTECTION

No specific hand protection noted, but gloves may still be advisable. For prolonged or repeated skin contact use suitable protective gloves. Rubber or plastic.

EYE PROTECTION

Wear dust resistant safety goggles where there is danger of eye contact.

OTHER PROTECTION

Wear appropriate clothing to prevent repeated or prolonged skin contact. Provide eyewash station.

9 PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE	Powder, dust		
COLOUR	Cream to Grey		
ODOUR	Odourless		
SOLUBILITY	Insoluble in water		
RELATIVE DENSITY	2.3 - 2.6 20	BULK DENSITY	769 - 833 kg/m3
pH-VALUE, CONC. SOLUTION	9 - 10		

10 STABILITY AND REACTIVITY**STABILITY**

Stable under normal temperature conditions.

CONDITIONS TO AVOID

Avoid wet and humid conditions.

MATERIALS TO AVOID

No incompatible materials noted.

HAZARDOUS DECOMPOSITION PRODUCTS

No specific hazardous decomposition products noted.

11 TOXICOLOGICAL INFORMATION**INHALATION**

Dust may irritate respiratory system or lungs. Harmful: danger of serious damage to health by prolonged exposure through inhalation.

INGESTION

May cause discomfort if swallowed.

BENTONITE**SKIN CONTACT**

Powder may irritate skin.

EYE CONTACT

Particles in the eyes may cause irritation and smarting.

HEALTH WARNINGS

This product contains small quantities of quartz. Prolonged inhalation of high concentrations may damage respiratory system. Because of quantity and composition, the health hazard is small.

12 ECOLOGICAL INFORMATION**ECOTOXICITY**

Not regarded as dangerous for the environment. Contact M-I Swaco's QHSE Department for ecological information.

13 DISPOSAL CONSIDERATIONS**DISPOSAL METHODS**

Recover and reclaim or recycle, if practical. Dispose of waste and residues in accordance with local authority requirements.

14 TRANSPORT INFORMATION

GENERAL The product is not covered by international regulation on the transport of dangerous goods (IMDG, IATA, ADR/RID).

15 REGULATORY INFORMATION**RISK PHRASES**

NC Not classified.

SAFETY PHRASES

NC Not classified.

UK REGULATORY REFERENCES

The Control of Substances Hazardous to Health Regulations 1988. Chemicals (Hazard Information & Packaging) Regulations. IARC Monographs, Vol.68, 1997.

EU DIRECTIVES

Dangerous Substance Directive 67/548/EEC. Dangerous Preparations Directive 1999/45/EEC.

GUIDANCE NOTES

Workplace Exposure Limits EH40.

16 OTHER INFORMATION**GENERAL INFORMATION**

HMIS Health - 1 HMIS Flammability - 1 HMIS Physical Hazard - 0 E - Safety glasses, Gloves, Dust Respirator

INFORMATION SOURCES

Material Safety Data Sheet, Misc. manufacturers. Transport of Dangerous Goods, Model Regulations, Tenth Revised Edition, United Nations.

REVISION COMMENTS

The following sections have been revised: 5, 6, 7, 8, 13, 14, 15 and 16. Revised by Bill Cameron

ISSUED BY

Sam Hoskin

REVISION DATE 23-09-05

REV. NO./REPL. SDS GENERATED 2

SDS NO. 10609

RISK PHRASES IN FULL

R20 Harmful by inhalation.

DISCLAIMER

MSDS furnished independent of product sale. While every effort has been made to accurately describe this product, some of the data are obtained from sources beyond our direct supervision. We cannot make any assertions as to its reliability or completeness; therefore, user may rely only at user's risk. We have made no effort to censor or conceal deleterious aspects of this product. Since we cannot anticipate or control the conditions under which this information and product may be used, we make no guarantee that the precautions we have suggested will be adequate for all individuals and/or situations. It is the obligation of each user of this product to comply with the requirements of all applicable laws regarding use and disposal of this product. Additional information will be furnished upon request to assist the user; however, no warranty, either expressed or implied, nor liability of any nature with respect to this product or to the data herein is made or incurred hereunder.



SAFETY DATA SHEET

SDS ID NO.: 0290MAR019
Revision Date: 06/01/2016

1. IDENTIFICATION

Product Name: Marathon Petroleum No. 2 Ultra Low Sulfur Diesel

Synonym: #2 Diesel; No. 2 Ultra Low Sulfur Diesel 15 ppm Sulfur Max; Ultra Low Sulfur Diesel No. 2 15 ppm Sulfur Max; Ultra Low Sulfur Diesel No. 2 15 ppm Sulfur Max with Polar Plus; No. 2 Diesel, Motor Vehicle Use, Undyed; No. 2 Diesel, Motor Vehicle Use, Undyed, with Polar Plus; ULSD No. 2 Diesel 15 ppm Sulfur Max; ULSD No. 2 Diesel 15 ppm Sulfur Max with Polar Plus; No. 2 MV 15 Diesel; No. 2 MV 15 Diesel with Polar Plus; No. 2 Ultra Low Sulfur Diesel Dyed 15 ppm Sulfur Max; Ultra Low Sulfur Diesel No. 2 Dyed 15 ppm Sulfur Max; Ultra Low Sulfur Diesel No. 2 Dyed 15 ppm Sulfur Max with Polar Plus; No. 2 Diesel, Tax Exempt-Motor Vehicle Use, Dyed; No. 2 Diesel, Tax Exempt-Motor Vehicle Use, Dyed, with Polar Plus; ULSD No. 2 Diesel Dyed 15 ppm Sulfur Max; ULSD No. 2 Diesel Dyed 15 ppm Sulfur Max, with Polar Plus; No. 2 MV 15 Diesel Dyed; #2 MV 15 CFI Diesel; #2 MV 15 CFI Diesel Dyed; No. 2 Low Sulfur Diesel (TxLED); No. 2 MV 15 Diesel Dyed, with Polar Plus; No. 2 NRLM 15 Diesel Dyed; No.2 NRLM Diesel Dyed; No. 2 MV 500 ppm TxLED; No.2 Low Emission Low Sulfur Diesel; No. 2 Low Sulfur Diesel (TxLED) 500 ppm Sulfur Max; No. 2 Heating Oil 5000 NMA Unmarked; NEMA No. 2 Heating Oil; Heating Oil, No. 2 Low Sulfur 5000 ppm; No. 2 Ultra Low Sulfur Diesel Dyed with <6% Renewable Diesel Fuel; Ultra Low Sulfur No. 2 Diesel Dyed with <6% Renewable Diesel Fuel; No. 2 Diesel Dyed with <6% Renewable Diesel Fuel 15 ppm Sulfur Max; No. 2 Ultra Low Sulfur Diesel with <6% Renewable Diesel Fuel; Ultra Low Sulfur No. 2 Diesel with <6% Renewable Diesel Fuel; No. 2 Diesel with <6% Renewable Diesel Fuel 15 ppm Sulfur Max; Garyville Export Diesel; Export Diesel, Garyville; Diesel Fuel, Export Garyville; #2 Motor Vehicle ULSD 15 ppm with 0-5% Renewable Diesel; Marathon No. 2 ULSD with 0-5% Renewable Fuel with R100; Marathon No. 2 ULSD with 0-5% Renewable Fuel with R99; No. 2 Heating Oil 2000 ppm Sulfur Max, Clear (Undyed) Unmarked; Ultra Low Sulfur Heating Oil 15 ppm Sulfur Max, Clear (Undyed) Unmarked; ULS Heating Oil 15 ppm Clear (Undyed) Unmarked; ULS HO 15 ppm CLR; Ultra-Low Sulfur Heating Oil (<= 15ppm, Undyed); No. 2 Heating Oil 2000 ppm Sulfur Max, Dyed Unmarked; No. 2 Heating Oil 2000 ppm Sulfur Max, Dyed Marked; Ultra Low Sulfur Heating Oil 15 ppm Sulfur Max, Dyed Unmarked; Ultra Low Sulfur Heating Oil 15 ppm Sulfur Max, Dyed Marked; 15 ppm Sulfur Heating Oil Grade 67; 15 PPM Heating Oil; 15 PPM Dyed Heating Oil; 0291MAR019; 0306MAR019; 0308MAR019; 0334MAR019; 0335MAR019; 0336MAR019; 0337MAR019; 0340MAR019;
Chemical Family: Complex Hydrocarbon Substance

Recommended Use: Fuel.
Restrictions on Use: All others.

Manufacturer, Importer, or Responsible Party Name and Address:
MARATHON PETROLEUM COMPANY LP
539 South Main Street
Findlay, OH 45840

SDS information: 1-419-421-3070

Emergency Telephone: 1-877-627-5463

2. HAZARD IDENTIFICATION

Classification

OSHA Regulatory Status

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids	Category 3
Acute toxicity - Inhalation (Dusts/Mists)	Category 4
Skin corrosion/irritation	Category 2
Carcinogenicity	Category 2
Specific target organ toxicity (single exposure)	Category 3
Specific target organ toxicity (repeated exposure)	Category 2
Aspiration toxicity	Category 1
Acute aquatic toxicity	Category 2
Chronic aquatic toxicity	Category 2

Hazards Not Otherwise Classified (HNOC)

Static accumulating flammable liquid

Label elements

EMERGENCY OVERVIEW

Danger

FLAMMABLE LIQUID AND VAPOR

May accumulate electrostatic charge and ignite or explode

May be fatal if swallowed and enters airways

Harmful if inhaled

Causes skin irritation

May cause respiratory irritation

May cause drowsiness or dizziness

Suspected of causing cancer

May cause damage to organs (thymus, liver, bone marrow) through prolonged or repeated exposure

Toxic to aquatic life with long lasting effects



Appearance Yellow to Red Liquid

Physical State Liquid

Odor Hydrocarbon

Precautionary Statements - Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use only non-sparking tools.

Use explosion-proof electrical/ventilating/lighting/equipment

Take precautionary measures against static discharge

Do not breathe mist/vapors/spray

Use only outdoors or in a well-ventilated area

Wear protective gloves/protective clothing/eye protection/face protection

Wash hands and any possibly exposed skin thoroughly after handling
Avoid release to the environment

Precautionary Statements - Response

IF exposed or concerned: Get medical attention
IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
If skin irritation occurs: Get medical attention
Wash contaminated clothing before reuse
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
Call a POISON CENTER or doctor if you feel unwell
IF SWALLOWED: Immediately call a POISON CENTER or doctor
Do NOT induce vomiting
In case of fire: Use water spray, fog or regular foam for extinction
Collect spillage

Precautionary Statements - Storage

Store in a well-ventilated place. Keep container tightly closed
Keep cool
Store locked up

Precautionary Statements - Disposal

Dispose of contents/container at an approved waste disposal plant

3. COMPOSITION/INFORMATION ON INGREDIENTS

No. 2 Ultra Low Sulfur Diesel is a complex mixture of paraffins, cycloparaffins, olefins and aromatic hydrocarbon chain lengths predominantly in the range of eleven to twenty carbons. May contain up to 5% Renewable Diesel. May contain small amounts of dye and other additives (<0.15%) which are not considered hazardous at the concentration(s) used. May contain a trace amount of benzene (<0.01%). Contains a trace amount of sulfur (<0.0015%)

Composition Information:

Name	CAS Number	% Concentration
No. 2 Diesel Fuel	68476-34-6	50-100
Kerosine, Petroleum	8008-20-6	0-50
Alkanes, C10-C20 branched and linear	928771-01-1	0-5
Naphthalene	91-20-3	0.3-2.6

All concentrations are percent by weight unless material is a gas. Gas concentrations are in percent by volume.

4. FIRST AID MEASURES

First Aid Measures

General Advice:

In case of accident or if you feel unwell, seek medical advice immediately (show directions for use or safety data sheet if possible).

Inhalation:

Remove to fresh air. If not breathing, institute rescue breathing. If breathing is difficult, ensure airway is clear, give oxygen and continue to monitor. If heart has stopped, immediately begin cardiopulmonary resuscitation (CPR). Keep affected person warm and at rest. GET IMMEDIATE MEDICAL ATTENTION.

Skin Contact:

Immediately wash exposed skin with plenty of soap and water while removing contaminated clothing and shoes. May be absorbed through the skin in harmful amounts. Get medical attention if irritation persists. Any injection injury from high pressure equipment should be evaluated immediately by a physician as potentially serious (See NOTES TO PHYSICIAN).

Place contaminated clothing in closed container until cleaned or discarded. If clothing is to be laundered, inform the person performing the operation of contaminant's hazardous properties. Destroy contaminated, non-chemical resistant footwear.

Eye Contact:	Flush immediately with large amounts of water for at least 15 minutes. Eyelids should be held away from the eyeball to ensure thorough rinsing. Gently remove contacts while flushing. Get medical attention if irritation persists.
Ingestion:	Do not induce vomiting because of danger of aspirating liquid into lungs, causing serious damage and chemical pneumonitis. If spontaneous vomiting occurs, keep head below hips, or if patient is lying down, turn body and head to side to prevent aspiration and monitor for breathing difficulty. Never give anything by mouth to an unconscious person. Keep affected person warm and at rest. GET IMMEDIATE MEDICAL ATTENTION.

Most important signs and symptoms, both short-term and delayed with overexposure

Adverse Effects:	Irritating to the skin and mucous membranes. Symptoms may include redness, itching, and inflammation. May cause nausea, vomiting, diarrhea, and signs of nervous system depression: headache, drowsiness, dizziness, loss of coordination, disorientation and fatigue. Aspiration hazard. May cause coughing, chest pains, shortness of breath, pulmonary edema and/or chemical pneumonitis. Repeated or prolonged skin contact may cause drying, reddening, itching and cracking. Prolonged or repeated exposure may cause adverse effects to the thymus, liver, and bone marrow.
-------------------------	--

Indication of any immediate medical attention and special treatment needed

Notes To Physician:	<p>INHALATION: This material (or a component) sensitizes the myocardium to the effects of sympathomimetic amines. Epinephrine and other sympathomimetic drugs may initiate cardiac arrhythmias in individuals exposed to this material. Administration of sympathomimetic drugs should be avoided.</p> <p>SKIN: Leaks or accidents involving high-pressure equipment may inject a stream of material through the skin and initially produce an injury that may not appear serious. Only a small puncture wound may appear on the skin surface but, without proper treatment and depending on the nature, original pressure, volume, and location of the injected material, can compromise blood supply to an affected body part. Prompt surgical debridement of the wound may be necessary to prevent irreversible loss of function and/or the affected body part. High pressure injection injuries may be SERIOUS SURGICAL EMERGENCIES.</p> <p>INGESTION: This material represents a significant aspiration and chemical pneumonitis hazard. Induction of emesis is not recommended.</p>
----------------------------	---

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

For small fires, Class B fire extinguishing media such as CO₂, dry chemical, foam (AFFF/ATC) or water spray can be used. For large fires, water spray, fog or foam (AFFF/ATC) can be used. Firefighting should be attempted only by those who are adequately trained and equipped with proper protective equipment.

Unsuitable extinguishing media

Do not use straight water streams to avoid spreading fire.

Specific hazards arising from the chemical

This product has been determined to be a flammable liquid per the OSHA Hazard Communication Standard and should be handled accordingly. May accumulate electrostatic charge and ignite or explode. Vapors may travel along the ground or be moved by ventilation and ignited by many sources such as pilot lights, sparks, electric motors, static discharge, or other ignition sources at locations distant from material handling. Flashback can occur along vapor trail. For additional fire related information, see NFPA 30 or the Emergency Response Guidebook 128.

Hazardous combustion products

Smoke, carbon monoxide, and other products of incomplete combustion.

Explosion data

Sensitivity to Mechanical Impact No.

Sensitivity to Static Discharge Yes.

Special protective equipment and precautions for firefighters

Firefighters should wear full protective clothing and positive-pressure self-contained breathing apparatus (SCBA) with a full face-piece, as appropriate. Avoid using straight water streams. Water spray and foam (AFFF/ATC) must be applied carefully to avoid frothing and from as far a distance as possible. Avoid excessive water spray application. Keep surrounding area cool with water spray from a distance and prevent further ignition of combustible material. Keep run-off water out of sewers and water sources.

Additional firefighting tactics

FIRES INVOLVING TANKS OR CAR/TRAILER LOADS: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles. Cool containers with flooding quantities of water until well after the fire is out. Do not direct water at source of leak or safety devices; icing may occur. Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank. ALWAYS stay away from tanks engulfed in fire. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

EVACUATION: Consider initial downwind evacuation for at least 1000 feet. If tank, rail car or tank truck is involved in a fire, ISOLATE for 5280 feet (1 mile) in all directions; also, consider initial evacuation of 5280 feet (1 mile) in all directions.

NFPA Health 1 Flammability 2 Instability 0 Special Hazard -

6. ACCIDENTAL RELEASE MEASURES

Personal precautions:	Keep public away. Isolate and evacuate area. Shut off source if safe to do so. Eliminate all ignition sources. All contaminated surfaces will be slippery.
Protective equipment:	Use personal protection measures as recommended in Section 8.
Emergency procedures:	Advise authorities and National Response Center (800-424-8802) if the product has entered a water course or sewer. Notify local health and pollution control agencies, if appropriate.
Environmental precautions:	Avoid release to the environment. Avoid subsoil penetration.
Methods and materials for containment:	Contain liquid with sand or soil. Prevent spilled material from entering storm drains, sewers, and open waterways.
Methods and materials for cleaning up:	Use suitable absorbent materials such as vermiculite, sand, or clay to clean up residual liquids. Recover and return free product to proper containers. When recovering free liquids ensure all equipment is grounded and bonded. Use only non-sparking tools.

7. HANDLING AND STORAGE

Safe Handling Precautions: NEVER SIPHON THIS PRODUCT BY MOUTH. Use appropriate grounding and bonding practices. Static accumulating flammable liquid. Bonding and grounding may be insufficient to eliminate the hazard from static electricity. Do not expose to heat, open flames, strong oxidizers or other sources of ignition. Vapors may travel along the ground or be moved by ventilation. Flashback may occur along vapor trails. No smoking. Use only non-sparking tools. Avoid breathing fumes, gas, or vapors. Use only with adequate ventilation. Avoid repeated and prolonged skin contact. Use personal protection measures as recommended in Section 8. Exercise good personal hygiene including removal of soiled clothing and prompt washing with soap and water. Do not cut, drill, grind or weld on empty containers since explosive residues may remain. Refer to applicable EPA, OSHA, NFPA and consistent state and local requirements.

Hydrocarbons are basically non-conductors of electricity and can become electrostatically charged during mixing, filtering, pumping at high flow rates or loading and transfer operations. If this charge reaches a sufficiently high level, sparks can form that may ignite the vapors of flammable liquids. Sudden release of hot organic chemical vapors or mists

from process equipment operating under elevated temperature and pressure, or sudden ingress of air into vacuum equipment may result in ignition of vapors or mists without the presence of obvious ignition sources. Nozzle spouts must be kept in contact with the containers or tank during the entire filling operation.

Portable containers should never be filled while in or on a motor vehicle or marine craft. Containers should be placed on the ground. Static electric discharge can ignite fuel vapors when filling non-grounded containers or vehicles on trailers. The nozzle spout must be kept in contact with the container before and during the entire filling operation. Use only approved containers.

A buildup of static electricity can occur upon re-entry into a vehicle during fueling especially in cold or dry climate conditions. The charge is generated by the action of dissimilar fabrics (i.e., clothing and upholstery) rubbing across each other as a person enters/exits the vehicle. A flash fire can result from this discharge if sufficient flammable vapors are present. Therefore, do not get back in your vehicle while refueling.

Cellular phones and other electronic devices may have the potential to emit electrical charges (sparks). Sparks in potentially explosive atmospheres (including fueling areas such as gas stations) could cause an explosion if sufficient flammable vapors are present. Therefore, turn off cellular phones and other electronic devices when working in potentially explosive atmospheres or keep devices inside your vehicle during refueling.

High-pressure injection of any material through the skin is a serious medical emergency even though the small entrance wound at the injection site may not initially appear serious. These injection injuries can occur from high-pressure equipment such as paint spray or grease or guns, fuel injectors, or pinhole leaks in hoses or hydraulic lines and should all be considered serious. High pressure injection injuries may be SERIOUS SURGICAL EMERGENCIES (See First Aid Section 4).

Storage Conditions:

Store in properly closed containers that are appropriately labeled and in a cool, well-ventilated area. Do not store near an open flame, heat or other sources of ignition.

Incompatible Materials

Strong oxidizing agents.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Name	ACGIH TLV	OSHA PELs:	OSHA - Vacated PELs	NIOSH IDLH
No. 2 Diesel Fuel 68476-34-6	100 mg/m ³ TWA Skin - potential significant contribution to overall exposure by the cutaneous route	-	-	-
Kerosine, Petroleum 8008-20-6	200 mg/m ³ TWA Skin - potential significant contribution to overall exposure by the cutaneous route	-	-	-
Alkanes, C10-C20 branched and linear 928771-01-1	-	-	-	-
Naphthalene 91-20-3	10 ppm TWA Skin - potential significant contribution to overall exposure by the cutaneous route	TWA: 10 ppm TWA: 50 mg/m ³	10 ppm TWA 50 mg/m ³ TWA 15 ppm STEL 75 mg/m ³ STEL	250 ppm

Notes:

The manufacturer has voluntarily elected to provide exposure limits contained in OSHA's 1989 air contaminants standard in its SDSs, even though certain of those exposure limits were vacated in 1992.

Engineering measures:

Local or general exhaust required in an enclosed area or with inadequate ventilation. Use mechanical ventilation equipment that is explosion-proof.

Personal protective equipment

Eye protection:	Use goggles or face-shield if the potential for splashing exists.
Skin and body protection:	Wear neoprene, nitrile or PVA gloves to prevent skin contact. Glove suitability is based on workplace conditions and usage. Contact the glove manufacturer for specific advice on glove selection and breakthrough times.
Respiratory protection:	Use a NIOSH approved organic vapor chemical cartridge or supplied air respirators when there is the potential for airborne exposures to exceed permissible exposure limits or if excessive vapors are generated. Observe respirator assigned protection factors (APFs) criteria cited in federal OSHA 29 CFR 1910.134. Self-contained breathing apparatus should be used for fire fighting.
Hygiene measures:	Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes and clothing.

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

Physical State	Liquid
Appearance	Yellow to Red Liquid
Color	Yellow to Red
Odor	Hydrocarbon
Odor Threshold	No data available.

<u>Property</u>	<u>Values (Method)</u>
Melting Point / Freezing Point	No data available.
Initial Boiling Point / Boiling Range	154-366 °C / 310-691 °F (ASTM D86)
Flash Point	58-76 °C / 136-168 °F (ASTM D93)
Evaporation Rate	No data available.
Flammability (solid, gas)	Not applicable.
Flammability Limit in Air (%):	
Upper Flammability Limit:	No data available.
Lower Flammability Limit:	No data available.
Explosion limits:	No data available.
Vapor Pressure	No data available.
Vapor Density	No data available.
Specific Gravity / Relative Density	0.82-0.86 (ASTM D4052)
Water Solubility	No data available.
Solubility in other solvents	No data available.
Partition Coefficient	No data available.
Decomposition temperature	No data available.
pH:	Not applicable
Autoignition Temperature	No data available.
Kinematic Viscosity	1.90-3.32 cSt @ 40°C (ASTM D445)
Dynamic Viscosity	No data available.
Explosive Properties	No data available.
VOC Content (%)	No data available.
Density	No data available.
Bulk Density	Not applicable.

10. STABILITY AND REACTIVITY

<u>Reactivity</u>	The product is non-reactive under normal conditions.
<u>Chemical stability</u>	The material is stable at 70°F, 760 mmHg pressure.

<u>Possibility of hazardous reactions</u>	None under normal processing.
<u>Hazardous polymerization</u>	Will not occur.
<u>Conditions to avoid</u>	Excessive heat, sources of ignition, open flame.
<u>Incompatible Materials</u>	Strong oxidizing agents.
<u>Hazardous decomposition products</u>	None known under normal conditions of use.

11. TOXICOLOGICAL INFORMATION

Potential short-term adverse effects from overexposures

Inhalation	Harmful if inhaled. May cause irritation of respiratory tract. May cause drowsiness or dizziness. Breathing high concentrations of this material in a confined space or by intentional abuse can cause irregular heartbeats which can cause death.
Eye contact	Exposure to vapor or contact with liquid may cause mild eye irritation, including tearing, stinging, and redness.
Skin contact	Causes skin irritation. Effects may become more serious with repeated or prolonged contact. May be absorbed through the skin in harmful amounts.
Ingestion	May be fatal if swallowed or vomited and enters airways. May cause irritation of the mouth, throat and gastrointestinal tract.

Acute toxicological data

Name	Oral LD50	Dermal LD50	Inhalation LC50
No. 2 Diesel Fuel 68476-34-6	> 5000 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	>1 - <5 mg/L (Rat) 4 h
Kerosine, Petroleum 8008-20-6	> 5000 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	> 5.28 mg/L (Rat) 4 h
Alkanes, C10-C20 branched and linear 928771-01-1	-	-	>1 - <5 mg/l (Rat) 4 h
Naphthalene 91-20-3	490 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	> 340 mg/m ³ (Rat) 1 h

Delayed and immediate effects as well as chronic effects from short and long-term exposure

MIDDLE DISTILLATES, PETROLEUM: Long-term repeated (lifetime) skin exposure to similar materials has been reported to result in an increase in skin tumors in laboratory rodents. The relevance of these findings to humans is not clear at this time. Altered mental state, drowsiness, peripheral motor neuropathy, irreversible brain damage (so-called Petrol Sniffer's Encephalopathy), delirium, seizures, and sudden death have been reported from repeated overexposure to some hydrocarbon solvents, naphthas, and gasoline.

MIDDLE DISTILLATES WITH CRACKED STOCKS: Light cracked distillates have been shown to be carcinogenic in animal tests and have tested positive with in vitro genotoxicity tests. Repeated dermal exposures to high concentrations in test animals resulted in reduced litter size and litter weight, and increased fetal resorptions at maternally toxic doses. Dermal exposure to high concentrations resulted in severe skin irritation with weight loss and some mortality. Inhalation exposure to high concentrations resulted in respiratory tract irritation, lung changes/infiltration/accumulation, and reduction in lung function.

ISOPARAFFINS: Studies in laboratory animals have shown that long-term exposure to similar materials (isoparaaffins) can cause kidney damage and kidney cancer in male laboratory rats. However, in-depth research indicates that these findings are unique to the male rat, and that these effects are not relevant to humans.

NAPHTHALENE: Severe jaundice, neurotoxicity (kernicterus) and fatalities have been reported in young children and infants as a result of hemolytic anemia from overexposure to naphthalene. Persons with glucose 6-phosphate dehydrogenase (G6PD) deficiency are more prone to the hemolytic effects of naphthalene. Adverse effects on the kidney have been reported in persons overexposed to naphthalene but these effects are believed to be a consequence of hemolytic anemia, and not a direct effect. Hemolytic anemia has been observed in laboratory animals exposed to naphthalene. Laboratory rodents exposed to naphthalene vapor for 2 years (lifetime studies) developed non-neoplastic and neoplastic tumors and inflammatory lesions of the nasal and respiratory tract. Cataracts and other adverse effects on the eye have been observed in laboratory animals exposed to high levels of naphthalene. Findings from a large number of bacterial and mammalian cell mutation assays have been negative. A few studies have shown chromosomal effects (elevated levels of Sister Chromatid Exchange or chromosomal aberrations) in vitro. Naphthalene has been classified as Possibly Carcinogenic to Humans (2B) by IARC, based on findings from studies in laboratory animals.

DIESEL EXHAUST: The combustion of diesel fuels produces gases including carbon monoxide, carbon dioxide, oxides of nitrogen and/or sulfur, and hydrocarbons that can be irritating and hazardous with overexposure. Long-term occupational overexposure to diesel exhaust and diesel exhaust particulate matter has been associated with an increased risk of respiratory disease, including lung cancer, and is characterized as a "known human carcinogen" by the International Agency for Research on Cancer (IARC), as "a reasonably anticipated human carcinogen" by the National Toxicology Program, and as "likely to be carcinogenic to humans" by the EPA, based upon animal and occupational exposure studies. However, uncertainty exists with these classifications because of deficiencies in the supporting occupational exposure/epidemiology studies, including reliable exposure estimates. Lifetime animal inhalation studies with pulmonary overloading exposure concentrations of diesel exhaust emissions have produced tumors and other adverse health effects. However, in more recent long-term animal inhalation studies of diesel exhaust emissions, no increase in tumor incidence and in fact a substantial reduction in adverse health effects along with significant reductions in the levels of hazardous material emissions were observed and are associated with fuel composition alterations coupled with new technology diesel engines.

Adverse effects related to the physical, chemical and toxicological characteristics

Signs and Symptoms

Irritating to the skin and mucous membranes. Symptoms may include redness, itching, and inflammation. May cause nausea, vomiting, diarrhea, and signs of nervous system depression: headache, drowsiness, dizziness, loss of coordination, disorientation and fatigue. Aspiration hazard. May cause coughing, chest pains, shortness of breath, pulmonary edema and/or chemical pneumonitis. Repeated or prolonged skin contact may cause drying, reddening, itching and cracking. Prolonged or repeated exposure may cause damage to organs.

Sensitization

Not expected to be a skin or respiratory sensitizer.

Mutagenic effects

None known.

Carcinogenicity

Suspected of causing cancer.

Cancer designations are listed in the table below

Name	ACGIH (Class)	IARC (Class)	NTP	OSHA
No. 2 Diesel Fuel 68476-34-6	Confirmed animal carcinogen (A3)	Not Classifiable (3)	Not Listed	Not Listed
Kerosine, Petroleum 8008-20-6	Confirmed animal carcinogen (A3)	Not Classifiable (3)	Not Listed	Not Listed
Alkanes, C10-C20 branched and linear 928771-01-1	Not Listed	Not Listed	Not Listed	Not Listed
Naphthalene	Confirmed animal	Possible human carcinogen	Reasonably anticipated to	Not Listed

91-20-3	carcinogen (A3)	(2B)	be a human carcinogen	
---------	-----------------	------	-----------------------	--

Reproductive toxicity None known.

Specific Target Organ Toxicity (STOT) - single exposure Respiratory system. Central nervous system.

Specific Target Organ Toxicity (STOT) - repeated exposure Thymus. Liver. Bone marrow.

Aspiration hazard May be fatal if swallowed or vomited and enters airways.

12. ECOLOGICAL INFORMATION

Ecotoxicity This product should be considered toxic to aquatic organisms, with the potential to cause long lasting adverse effects in the aquatic environment.

Name	Algae/aquatic plants	Fish	Toxicity to Microorganisms	Crustacea
No. 2 Diesel Fuel 68476-34-6	-	96-hr LC50 = 35 mg/l Fathead minnow (flow-through)	-	48-hr EL50 = 6.4 mg/l Daphnia magna
Kerosine, Petroleum 8008-20-6	72-hr EL50 = 5.0-11 mg/l Algae	96-hr LL50 = 18-25 mg/l Fish	-	48-hr EL50 = 1.4-21 mg/l Invertebrates
Alkanes, C10-C20 branched and linear 928771-01-1	-	-	-	-
Naphthalene 91-20-3	-	96-hr LC50 = 0.91-2.82 mg/l Rainbow trout (static) 96-hr LC50 = 1.99 mg/l Fathead minnow (static)	-	48-hr LC50 = 1.6 mg/l Daphnia magna

Persistence and degradability Expected to be inherently biodegradable.

Bioaccumulation Has the potential to bioaccumulate.

Mobility in soil May partition into air, soil and water.

Other adverse effects No information available.

13. DISPOSAL CONSIDERATIONS

Description of Waste Residues

This material may be a flammable liquid waste.

Safe Handling of Wastes

Handle in accordance with applicable local, state, and federal regulations. Use personal protection measures as required. Use appropriate grounding and bonding practices. Use only non-sparking tools. Do not expose to heat, open flames, strong oxidizers or other sources of ignition. No smoking.

Disposal of Wastes / Methods of Disposal

The user is responsible for determining if any discarded material is a hazardous waste (40 CFR 262.11). Dispose of in accordance with federal, state and local regulations.

Methods of Contaminated Packaging Disposal

Empty containers should be completely drained and then discarded or recycled, if possible. Do not cut, drill, grind or weld on empty containers since explosive residues may be present. Dispose of in accordance with federal, state and local regulations.

14. TRANSPORT INFORMATION

DOT (49 CFR 172.101):

UN Proper Shipping Name: Fuel Oil, No. 2
UN/Identification No: NA 1993
Transport Hazard Class(es): 3
Packing Group: III

TDG (Canada):

UN Proper Shipping Name: Diesel Fuel
UN/Identification No: UN 1202
Transport Hazard Class(es): 3
Packing Group: III

15. REGULATORY INFORMATION

US Federal Regulatory Information:

US TSCA Chemical Inventory Section 8(b): This product and/or its components are listed on the TSCA Chemical Inventory.

EPA Superfund Amendment & Reauthorization Act (SARA):

SARA Section 302: This product does not contain any component(s) included on EPA's Extremely Hazardous Substance (EHS) List.

Name	CERCLA/SARA - Section 302 Extremely Hazardous Substances and TPQs
No. 2 Diesel Fuel	NA
Kerosine, Petroleum	NA
Alkanes, C10-C20 branched and linear	NA
Naphthalene	NA

SARA Section 304: This product may contain component(s) identified either as an EHS or a CERCLA Hazardous substance which in case of a spill or release may be subject to SARA reporting requirements:

Name	Hazardous Substances RQs
No. 2 Diesel Fuel	NA
Kerosine, Petroleum	NA
Alkanes, C10-C20 branched and linear	NA
Naphthalene	100 lb final RQ 45.4 kg final RQ

SARA: The following EPA hazard categories apply to this product:

Acute Health Hazard
Fire Hazard
Chronic Health Hazard

SARA Section 313: This product may contain component(s), which if in exceedance of the de minimus threshold, may be subject to the reporting requirements of SARA Title III Section 313 Toxic Release Reporting (Form R).

Name	CERCLA/SARA 313 Emission reporting:
No. 2 Diesel Fuel	None
Kerosine, Petroleum	None
Alkanes, C10-C20 branched and linear	None
Naphthalene	0.1 % de minimis concentration

State and Community Right-To-Know Regulations:

The following component(s) of this material are identified on the regulatory lists below:

No. 2 Diesel Fuel

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 2444
Pennsylvania Right-To-Know:	Not Listed
Massachusetts Right-To Know:	Not Listed
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Not Listed
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Not Listed
New Jersey - Environmental Hazardous Substances List:	SN 2444 TPQ: 10000 lb (Under N.J.A.C. 7:1G, environmental hazardous substances in mixtures such as gasoline or new and used petroleum oil may be reported under these categories)
Illinois - Toxic Air Contaminants:	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed
Kerosine, Petroleum	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 1091
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Not Listed
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Not Listed
New Jersey - Environmental Hazardous Substances List:	SN 1091 TPQ: 10000 lb (Under N.J.A.C. 7:1G, environmental hazardous substances in mixtures such as gasoline or new and used petroleum oil may be reported under these categories)
Illinois - Toxic Air Contaminants:	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed
Alkanes, C10-C20 branched and linear	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	Not Listed
Pennsylvania Right-To-Know:	Not Listed
Massachusetts Right-To Know:	Not Listed
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Not Listed
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Not Listed
New Jersey - Environmental Hazardous Substances List:	Not Listed
Illinois - Toxic Air Contaminants:	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed
Naphthalene	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Carcinogen, initial date 4/19/02

New Jersey Right-To-Know:	SN 1322 SN 3758
Pennsylvania Right-To-Know:	Environmental hazard Present (particulate)
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Carcinogen
New Jersey - Environmental Hazardous Substances List:	SN 1322 TPQ: 500 lb (Reportable at the de minimis quantity of >0.1%)
Illinois - Toxic Air Contaminants:	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	100 lb RQ (air); 1 lb RQ (land/water)

Canada DSL/NDL Inventory: This product and/or its components are listed either on the Domestic Substances List (DSL) or are exempt.

Canadian Regulatory Information: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the (M)SDS contains all the information required by the Controlled Products Regulations.

Name	Canada - WHMIS: Classifications of Substances:	Canada - WHMIS: Ingredient Disclosure:
No. 2 Diesel Fuel	B3,D2A,D2B	0.1%
Kerosine, Petroleum	B3,D2B	1%
Alkanes, C10-C20 branched and linear	B3,D2A,D2B	0.1%
Naphthalene	B4,D2A	0.1%



Note: Not applicable.

16. OTHER INFORMATION

Prepared By Toxicology and Product Safety

Revision Date: 06/01/2016

Revision Note:

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information is intended as guidance for safe handling, use, processing, storage, transportation, accidental release, clean-up and disposal and is not considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.



SAFETY DATA SHEET

SDS ID NO.: 0130MAR019
Revision Date: 05/14/2015

1. IDENTIFICATION

Product Name: Marathon Petroleum Regular Unleaded Gasoline With Ethanol
Synonym: Regular Unleaded Gasoline With Alcohol
Chemical Family: Complex Hydrocarbon Substance
Recommended Use: Fuel.
Use Restrictions: All others.

Supplier Name and Address:
MARATHON PETROLEUM COMPANY LP
539 South Main Street
Findlay, OH 45840

SDS information: 1-419-421-3070
Emergency Telephone: 1-877-627-5463

2. HAZARD IDENTIFICATION

Classification

OSHA Regulatory Status

This chemical is considered hazardous according to the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids	Category 1
Skin corrosion/irritation	Category 2
Germ cell mutagenicity	Category 1B
Carcinogenicity	Category 1B
Reproductive toxicity	Category 2
Specific target organ toxicity (single exposure)	Category 3
Aspiration toxicity	Category 1
Acute aquatic toxicity	Category 2
Chronic aquatic toxicity	Category 2

Hazards Not Otherwise Classified (HNOC)

Static accumulating flammable liquid

Label elements

EMERGENCY OVERVIEW

Danger

EXTREMELY FLAMMABLE LIQUID AND VAPOR
May accumulate electrostatic charge and ignite or explode

May be fatal if swallowed and enters airways
Causes skin irritation
May cause respiratory irritation
May cause drowsiness or dizziness
May cause genetic defects
May cause cancer
Suspected of damaging fertility or the unborn child
Toxic to aquatic life with long lasting effects



Appearance Clear or Colored Liquid

Physical State Liquid

Odor Strong Hydrocarbon

Precautionary Statements - Prevention

Keep away from heat/sparks/open flames/hot surfaces. — No smoking
Keep container tightly closed
Ground/bond container and receiving equipment
Use explosion-proof electrical/ventilating/lighting/equipment
Use only non-sparking tools
Take precautionary measures against static discharge
Obtain special instructions before use
Do not handle until all safety precautions have been read and understood
Wear protective gloves/protective clothing/eye protection/face protection
Do not eat, drink or smoke when using this product
Do not breathe mist/vapors/spray
Use only outdoors or in a well-ventilated area
Wash hands thoroughly after handling
Avoid release to the environment

Precautionary Statements - Response

IF exposed or concerned: Get medical attention
IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
If skin irritation occurs: Get medical attention
Wash contaminated clothing before reuse
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
Call a POISON CENTER or doctor if you feel unwell
IF SWALLOWED: Immediately call a POISON CENTER or doctor
Do NOT induce vomiting
In case of fire: Use water spray, fog or regular foam for extinction
Collect spillage

Precautionary Statements - Storage

Store in a well-ventilated place. Keep container tightly closed
Keep cool
Store locked up

Precautionary Statements - Disposal

Dispose of contents/container at an approved waste disposal plant

3. COMPOSITION/INFORMATION ON INGREDIENTS

Gasoline is a complex combination of hydrocarbons consisting of paraffins, cycloparaffins, aromatic and olefinic hydrocarbons having molecular chains ranging in length from four to ten carbons. May contain small amounts of dye and other additives (>0.02%) which are not considered hazardous at the concentrations used.

Composition Information:

Name	CAS Number	Weight %
Gasoline	86290-81-5	100
Toluene	108-88-3	0.9-13.5
Ethyl Alcohol	64-17-5	5.7-10
Xylene (mixed isomers)	1330-20-7	1.8-9
1,2,4 Trimethylbenzene	95-63-6	0.9-4.5
Benzene	71-43-2	0.45-3.2
n-Hexane	110-54-3	0-2.7
Ethylbenzene	100-41-4	0.45-1.8
Naphthalene	91-20-3	0.1-0.5

4. FIRST AID MEASURES

First Aid Measures

- General advice** In case of accident or if you feel unwell, seek medical advice immediately (show directions for use or safety data sheet if possible).
- Inhalation:** Remove to fresh air. If not breathing, institute rescue breathing. If breathing is difficult, ensure airway is clear, give oxygen and continue to monitor. If heart has stopped, immediately begin cardiopulmonary resuscitation (CPR). Keep affected person warm and at rest. GET IMMEDIATE MEDICAL ATTENTION.
- Skin Contact:** Immediately wash exposed skin with plenty of soap and water while removing contaminated clothing and shoes. May be absorbed through the skin in harmful amounts. Get medical attention if irritation persists. Any injection injury from high pressure equipment should be evaluated immediately by a physician as potentially serious (See NOTES TO PHYSICIAN).
- Place contaminated clothing in closed container until cleaned or discarded. If clothing is to be laundered, inform the person performing the operation of contaminant's hazardous properties. Destroy contaminated, non-chemical resistant footwear.
- Eye Contact:** Flush immediately with large amounts of water for at least 15 minutes. Eyelids should be held away from the eyeball to ensure thorough rinsing. Gently remove contacts while flushing. Get medical attention if irritation persists.
- Ingestion:** Do not induce vomiting because of danger of aspirating liquid into lungs, causing serious damage and chemical pneumonitis. If spontaneous vomiting occurs, keep head below hips, or if patient is lying down, turn body and head to side to prevent aspiration and monitor for breathing difficulty. Never give anything by mouth to an unconscious person. Keep affected person warm and at rest. GET IMMEDIATE MEDICAL ATTENTION.

Most important signs and symptoms, both short-term and delayed with overexposure

- Adverse Effects:** Acute: Headache, drowsiness, dizziness, loss of coordination, disorientation and fatigue.
Delayed: Dry skin and possible irritation with repeated or prolonged exposure.

Indication of any immediate medical attention and special treatment needed

NOTES TO PHYSICIAN:

INHALATION: This material (or a component) sensitizes the myocardium to the effects of sympathomimetic amines. Epinephrine and other sympathomimetic drugs may initiate cardiac arrhythmias in individuals exposed to this material. Administration of sympathomimetic drugs should be avoided.

SKIN: Leaks or accidents involving high-pressure equipment may inject a stream of material through the skin and initially produce an injury that may not appear serious. Only a small puncture wound may appear on the skin surface but, without proper treatment and depending on the nature, original pressure, volume, and location of the injected material, can compromise blood supply to an affected body part. Prompt surgical debridement of the wound may be necessary to prevent irreversible loss of function and/or the affected body part. High pressure injection injuries may be **SERIOUS SURGICAL EMERGENCIES**.

INGESTION: This material represents a significant aspiration and chemical pneumonitis hazard. Induction of emesis is not recommended.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

For small fires, Class B fire extinguishing media such as CO₂, dry chemical, foam (AFFF/ATC) or water spray can be used. For large fires, water spray, fog or foam (AFFF/ATC) can be used. Firefighting should be attempted only by those who are adequately trained and equipped with proper protective equipment.

Unsuitable extinguishing media

Do not use straight water streams to avoid spreading fire.

Specific hazards arising from the chemical

This product has been determined to be an extremely flammable liquid per the OSHA Hazard Communication Standard and should be handled accordingly. May accumulate electrostatic charge and ignite or explode. Vapors may travel along the ground or be moved by ventilation and ignited by many sources such as pilot lights, sparks, electric motors, static discharge, or other ignition sources at locations distant from material handling. Flashback can occur along vapor trail. For additional fire related information, see NFPA 30 or the North American Emergency Response Guide 128.

Hazardous combustion products

Smoke, carbon monoxide, and other products of incomplete combustion.

Explosion data

Sensitivity to Mechanical Impact No.

Sensitivity to Static Discharge Yes.

Special protective equipment and precautions for firefighters

Firefighters should wear full protective clothing and positive-pressure self-contained breathing apparatus (SCBA) with a full face-piece, as appropriate. Avoid using straight water streams. Water may be ineffective in extinguishing low flash point fires, but can be used to cool exposed surfaces. Avoid excessive water spray application. Water spray and foam (AFFF/ATC) must be applied carefully to avoid frothing and from as far a distance as possible. Keep run-off water out of sewers and water sources.

NFPA:

Health 1

Flammability 3

Instability 0

Special Hazards -

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions:

Keep public away. Isolate and evacuate area. Shut off source if safe to do so. Eliminate all ignition sources.

Protective Equipment:

Use personal protection measures as recommended in Section 8.

Emergency Procedures:

Advise authorities and National Response Center (800-424-8802) if the product has entered a water course or sewer. Notify local health and pollution control agencies, if appropriate.

Environmental precautions:	Ethanol in gasoline phase separates in contact with water. Monitor downstream for dissolved ethanol or other appropriate indicators. Avoid release to the environment. Avoid subsoil penetration.
Methods and materials for containment:	Contain liquid with sand or soil.
Methods and materials for cleaning up:	Use suitable absorbent materials such as vermiculite, sand, or clay to clean up residual liquids. Recover and return free product to proper containers. When recovering free liquids ensure all equipment is grounded and bonded. Use only non-sparking tools.

7. HANDLING AND STORAGE

Safe Handling Precautions:	<p>NEVER SIPHON THIS PRODUCT BY MOUTH. Use appropriate grounding and bonding practices. Static accumulating flammable liquid. Bonding and grounding may be insufficient to eliminate the hazard from static electricity. Do not expose to heat, open flames, strong oxidizers or other sources of ignition. No smoking. Avoid repeated and prolonged skin contact. Use personal protection measures as recommended in Section 8. Use only non-sparking tools. Do not cut, drill, grind or weld on empty containers since explosive residues may remain. Refer to applicable EPA, OSHA, NFPA and consistent state and local requirements.</p> <p>Hydrocarbons are basically non-conductors of electricity and can become electrostatically charged during mixing, filtering, pumping at high flow rates or loading and transfer operations. If this charge reaches a sufficiently high level, sparks can form that may ignite the vapors of flammable liquids. Sudden release of hot organic chemical vapors or mists from process equipment operating under elevated temperature and pressure, or sudden ingress of air into vacuum equipment may result in ignition of vapors or mists without the presence of obvious ignition sources. Nozzle spouts must be kept in contact with the containers or tank during the entire filling operation.</p> <p>Portable containers should never be filled while in or on a motor vehicle or marine craft. Containers should be placed on the ground. Static electric discharge can ignite fuel vapors when filling non-grounded containers or vehicles on trailers. The nozzle spout must be kept in contact with the container before and during the entire filling operation. Use only approved containers.</p> <p>A buildup of static electricity can occur upon re-entry into a vehicle during fueling especially in cold or dry climate conditions. The charge is generated by the action of dissimilar fabrics (i.e., clothing and upholstery) rubbing across each other as a person enters/exits the vehicle. A flash fire can result from this discharge if sufficient flammable vapors are present. Therefore, do not get back in your vehicle while refueling.</p> <p>Cellular phones and other electronic devices may have the potential to emit electrical charges (sparks). Sparks in potentially explosive atmospheres (including fueling areas such as gas stations) could cause an explosion if sufficient flammable vapors are present. Therefore, turn off cellular phones and other electronic devices when working in potentially explosive atmospheres or keep devices inside your vehicle during refueling.</p> <p>High-pressure injection of any material through the skin is a serious medical emergency even though the small entrance wound at the injection site may not initially appear serious. These injection injuries can occur from high-pressure equipment such as paint spray or grease or guns, fuel injectors, or pinhole leaks in hoses or hydraulic lines and should all be considered serious. High pressure injection injuries may be SERIOUS SURGICAL EMERGENCIES (See First Aid Section 4).</p>
Storage Conditions:	Store in properly closed containers that are appropriately labeled and in a cool, well-ventilated area.
Incompatible materials	Strong oxidizing agents.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Name	ACGIH TLV	OSHA PELs:	OSHA - Vacated PELs	NIOSH IDLH
Gasoline 86290-81-5	300 ppm TWA 500 ppm STEL	-	300 ppm TWA 900 mg/m ³ TWA 500 ppm STEL 1500 mg/m ³ STEL	-
Toluene 108-88-3	20 ppm TWA	TWA: 200 ppm Ceiling: 300 ppm	100 ppm TWA 375 mg/m ³ TWA 150 ppm STEL 560 mg/m ³ STEL	500 ppm
Ethyl Alcohol 64-17-5	1000 ppm STEL	TWA: 1000 ppm TWA: 1900 mg/m ³	1000 ppm TWA 1900 mg/m ³ TWA	3300 ppm
Xylene (mixed isomers) 1330-20-7	100 ppm TWA 150 ppm STEL	TWA: 100 ppm TWA: 435 mg/m ³	100 ppm TWA 435 mg/m ³ TWA 150 ppm STEL 655 mg/m ³ STEL	900 ppm
1,2,4 Trimethylbenzene 95-63-6	25 ppm TWA	-	25 ppm TWA 125 mg/m ³ TWA	-
Benzene 71-43-2	0.5 ppm TWA 2.5 ppm STEL Skin - potential significant contribution to overall exposure by the cutaneous route	TWA: 10 ppm (applies to industry segments exempt from the benzene standard at 29 CFR 1910.1028) TWA: 1 ppm STEL: 5 ppm (see 29 CFR 1910.1028)	25 ppm Ceiling 1 ppm TWA 5 ppm STEL	500 ppm
n-Hexane 110-54-3	50 ppm TWA Skin - potential significant contribution to overall exposure by the cutaneous route	TWA: 500 ppm TWA: 1800 mg/m ³	50 ppm TWA 180 mg/m ³ TWA	1100 ppm
Ethylbenzene 100-41-4	20 ppm TWA	TWA: 100 ppm TWA: 435 mg/m ³	100 ppm TWA 435 mg/m ³ TWA 125 ppm STEL 545 mg/m ³ STEL	800 ppm
Naphthalene 91-20-3	10 ppm TWA Skin - potential significant contribution to overall exposure by the cutaneous route	TWA: 10 ppm TWA: 50 mg/m ³	10 ppm TWA 50 mg/m ³ TWA 15 ppm STEL 75 mg/m ³ STEL	250 ppm

Notes: The manufacturer has voluntarily elected to provide exposure limits contained in OSHA's 1989 air contaminants standard in its SDSs, even though certain of those exposure limits were vacated in 1992.

Engineering measures: Local or general exhaust required in an enclosed area or when there is inadequate ventilation. Use mechanical ventilation equipment that is explosion-proof.

Personal protective equipment

Eye protection: Use goggles or face-shield if the potential for splashing exists.

Skin and body protection: Use nitrile rubber, viton or PVA gloves for repeated or prolonged skin exposure. Glove suitability is based on workplace conditions and usage. Contact the glove manufacturer for specific advice on glove selection and breakthrough times.

Respiratory protection: Approved organic vapor chemical cartridge or supplied air respirators should be worn for exposures to any components exceeding the established exposure limits. Observe respirator assigned protection factors (APFs) criteria cited in federal OSHA 29 CFR 1910.134. Self-contained breathing apparatus should be used for fire fighting.

Hygiene measures: Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes and clothing.

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

Physical State	Liquid
Appearance	Clear or Colored Liquid
Color	Clear or Colored
Odor	Strong Hydrocarbon
Odor Threshold	No available data.

<u>Property</u>	<u>Values (Method)</u>
Melting Point / Freezing Point	No available data.
Initial Boiling Point / Boiling Range	32-225 °C / 90-437 °F
Flash Point	-45.5 °C / -50 °F
Evaporation Rate	No available data.
Flammability (solid, gas)	Not applicable.
Flammability Limit in Air (%)	
Upper Flammability Limit:	7.6
Lower Flammability Limit:	1.4
Vapor Pressure	403-776 mm Hg@ 100°F
Vapor Density	3-4
Specific Gravity / Relative Density	0.70-0.77
Water Solubility	Negligible
Solubility in other solvents	No available data.
Partition Coefficient	2.13-4.5
Decomposition temperature:	No available data.
pH:	Not applicable
Autoignition Temperature	C.A. 257 °C / 495 °F
Kinematic Viscosity	No available data.
Dynamic Viscosity	No available data.
Explosive Properties	No available data.
Softening Point	No available data.
VOC Content (%)	100%
Density	5.9-6.3 lbs/gal
Bulk Density	Not applicable.

10. STABILITY AND REACTIVITY

<u>Reactivity</u>	The product is non-reactive under normal conditions.
<u>Chemical stability</u>	The material is stable at 70°F, 760 mmHg pressure.
<u>Possibility of hazardous reactions</u>	None under normal processing.
<u>Hazardous polymerization</u>	Will not occur.
<u>Conditions to avoid</u>	Excessive heat, sources of ignition, open flame.
<u>Incompatible materials</u>	Strong oxidizing agents.
<u>Hazardous decomposition products</u>	None known under normal conditions of use.

11. TOXICOLOGICAL INFORMATION

Potential short-term adverse effects from overexposures

Inhalation	Irritating to the respiratory system. May cause drowsiness or dizziness. Breathing high concentrations of this material in a confined space or by intentional abuse can cause irregular heartbeats which can cause death.
Eye contact	Causes mild eye irritation.
Skin contact	Causes skin irritation. Effects may become more serious with repeated or prolonged contact. May be absorbed through the skin in harmful amounts.
Ingestion	May be fatal if swallowed or vomited and enters airways. May cause irritation of the mouth, throat and gastrointestinal tract.

Acute Toxicological data

Name	Oral LD50	Dermal LD50	Inhalation LC50
Gasoline 86290-81-5	14000 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	> 5.2 mg/L (Rat) 4 h
Toluene 108-88-3	> 2000 mg/kg (Rat)	8390 mg/kg (Rabbit)	12.5 mg/L (Rat) 4 h
Ethyl Alcohol 64-17-5	> 5000 mg/kg (Rat)	-	124.7 mg/L (Rat) 4 h
Xylene (mixed isomers) 1330-20-7	> 2000 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	> 5.04 mg/L (Rat) 4 h
1,2,4 Trimethylbenzene 95-63-6	3280 mg/kg (Rat)	> 3160 mg/kg (Rabbit)	18,000 mg/m ³ (Rat) 4 h
Benzene 71-43-2	> 2000 mg/kg (Rat)	> 5000 mg/kg (Rabbit)	> 20 mg/l (Rat) 4 h
n-Hexane 110-54-3	15000 mg/kg (Rat)	3000 mg/kg (Rabbit)	48000 ppm (Rat) 4 h
Ethylbenzene 100-41-4	> 2000 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	17.2 mg/L (Rat) 4 h
Naphthalene 91-20-3	490 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	> 340 mg/m ³ (Rat) 1 h

Delayed and immediate effects as well as chronic effects from short and long-term exposure

BENZENE: Studies of workers exposed to benzene show clear evidence that overexposure can cause cancer and other diseases of the blood forming organs including Acute Myelogenous Leukemia (AML), and Aplastic Anemia (AA), an often fatal disease. Some studies suggest overexposure to benzene may also be associated with Myelodysplastic Syndrome (MDS). Findings from a case control study of workers exposed to benzene was reported during the 2009 Benzene Symposium in Munich included an increase in Acute Myeloid Leukemias and Non-Hodgkins Lymphoid Neoplasms (NHLN) of the subtype follicular lymphoma (FL) in some occupational categories. Some studies of workers exposed to benzene have shown an association with increased rates of chromosome aberrations in circulating lymphocytes. One study of women workers exposed to benzene suggested a weak association with irregular menstruation. However, other studies of workers exposed to benzene have not demonstrated clear evidence of an effect on fertility or reproductive outcome in humans. Benzene can cross the placenta and affect the developing fetus. Cases of AA have been reported in the offspring of persons severely overexposed to benzene. Studies in laboratory animals indicate that prolonged, repeated exposure to high levels of benzene vapor can cause bone marrow suppression and cancer in multiple organ systems. Studies in laboratory animals show evidence of adverse effects on male reproductive organs following high levels of exposure but no significant effects on reproduction have been observed. Embryotoxicity has been reported in studies of laboratory animals but effects were limited to reduced fetal weight and minor skeletal variations. Benzene has been classified as a proven human carcinogen by OSHA and a Group 1 (Carcinogenic to Humans) material by IARC. The current proposed IARC classification for benzene is summarized as follows: Sufficient evidence for Acute Myeloid Leukemia; limited evidence for Acute Lymphatic Leukemia, Chronic Lymphatic Leukemia, Non-Hodgkin Lymphoma, and Multiple Myeloma.

NAPHTHAS: In a large epidemiological study on over 15,000 employees at several petroleum refineries and amongst residents located near these refineries, no increased risk of kidney cancer was observed in association with gasoline exposures (a similar material). In a similar study, no increased risk of kidney cancer was observed among petroleum refinery workers, but there was a slight trend in the incidence of kidney cancers among service station employees, especially after a 30-year latency period. Altered mental state, drowsiness, peripheral motor neuropathy, irreversible brain damage (so-called Petrol Sniffer's Encephalopathy), delirium, seizures, and sudden death have been reported from repeated overexposure to some hydrocarbon solvents, naphthas, and gasoline.

ISOPARAFFINS: Studies in laboratory animals have shown that long-term exposure to similar materials (isoparaaffins) can cause kidney damage and kidney cancer in male laboratory rats. However, in-depth research indicates that these findings are unique to the male rat, and that these effects are not relevant to humans.

TOLUENE: Case studies of persons abusing toluene suggest isolated incidences of adverse effects on the fetus including birth defects. Abuse of toluene at high concentrations (e.g., glue sniffing and solvent abuse) has been associated with adverse effects on the liver, kidney and nervous system, and can cause CNS depression, cardiac arrhythmias, and death. Studies of workers indicate longterm exposure may be related to impaired color vision and hearing. Some studies of workers suggest longterm exposure may be related to neurobehavioral and cognitive changes. Some of these effects have been observed in laboratory animals following repeated exposure to high levels of toluene. Several studies of workers suggest longterm exposure may be related to small increases in spontaneous abortions and changes in some gonadotropic hormones. However, the weight of evidence does not indicate toluene is a reproductive hazard to humans. Studies in laboratory animals indicate some changes in reproductive organs following high levels of exposure, but no significant effects on mating performance or reproduction were observed. Case studies of persons abusing toluene suggest isolated incidences of adverse effects on the fetus including birth defects. Findings in laboratory animals have been largely negative. Positive findings include small increases in minor skeletal and visceral malformations and developmental delays following very high levels of maternal exposure. Studies of workers indicate long-term exposure may be related to effects on the liver, kidney and blood, but these appear to be limited to changes in serum enzymes and decreased leukocyte counts. Adverse effects on the liver, kidney, thymus and nervous system were observed in animal

studies following very high levels of exposure. The relevance of these findings to humans is not clear at this time.

ETHYLBENZENE: Findings from a 2-year inhalation study in rodents conducted by NTP were as follows: Effects were observed only at the highest exposure level (750 ppm). At this level the incidence of renal tumors was elevated in male rats (tubular carcinomas) and female rats (tubular adenomas). The incidence of tumors was also elevated in male mice (alveolar and bronchiolar carcinomas) and female mice (hepatocellular carcinomas). IARC has classified ethyl benzene as "possibly carcinogenic to humans" (Group 2B). Studies in laboratory animals indicate some evidence of post-implantation deaths following high levels of maternal exposure. The relevance of these findings to humans is not clear at this time. Studies in laboratory animals indicate limited evidence of renal malformations, resorptions, and developmental delays following high levels of maternal exposure with evidence of maternal toxicity. The relevance of these findings to humans is not clear at this time. Studies in laboratory animals have demonstrated evidence of ototoxicity (hearing loss) following exposure levels as low as 300 ppm for 5 days. Studies in laboratory animals indicate some evidence of adverse effects on the liver, kidney, thyroid, and pituitary gland.

XYLENES, ALL ISOMERS: Overexposure to xylene may cause upper respiratory tract irritation, headache, cyanosis, blood serum changes, nervous system damage and narcosis. Effects may be increased by the use of alcoholic beverages. Evidence of liver and kidney impairment were reported in workers recovering from a gross overexposure. Effects from Prolonged or Repeated Exposure: Impaired neurological function was reported in workers exposed to solvents including xylene. Studies in laboratory animals have shown evidence of impaired hearing following high levels of exposure. Studies in laboratory animals suggest some changes in reproductive organs following high levels of exposure but no significant effects on reproduction were observed. Studies in laboratory animals indicate skeletal and visceral malformations, developmental delays, and increased fetal resorptions following extremely high levels of maternal exposure with evidence of maternal toxicity. The relevance of these observations to humans is not clear at this time. Adverse effects on the liver, kidney, bone marrow (changes in blood cell parameters) were observed in laboratory animals following high levels of exposure. The relevance of these observations to humans is not clear at this time.

C9 AROMATIC HYDROCARBONS: A developmental inhalation study was conducted in laboratory mice. Increased implantation losses, reduced fetal weights, delayed ossification and an increased incidence of cleft palate were observed at the highest exposure level (1,500 ppm). This exposure level was extremely toxic to pregnant female mice (44% mortality). Reduced fetal body weights were also observed at 500 ppm. A multi-generation reproduction inhalation study was conducted in laboratory rats. Reductions in pup weights, pup weight gain, litter size, and pup survival were observed at 1,500 ppm, an exposure level at which significant maternal toxicity was observed. Reduced pup weight gain was also observed at 500 ppm.

NAPHTHALENE: Severe jaundice, neurotoxicity (kernicterus) and fatalities have been reported in young children and infants as a result of hemolytic anemia from overexposure to naphthalene. Persons with glucose 6-phosphate dehydrogenase (G6PD) deficiency are more prone to the hemolytic effects of naphthalene. Adverse effects on the kidney have been reported in persons overexposed to naphthalene but these effects are believed to be a consequence of hemolytic anemia, and not a direct effect. Hemolytic anemia has been observed in laboratory animals exposed to naphthalene. Laboratory rodents exposed to naphthalene vapor for 2 years (lifetime studies) developed non-neoplastic and neoplastic tumors and inflammatory lesions of the nasal and respiratory tract. Cataracts and other adverse effects on the eye have been observed in laboratory animals exposed to high levels of naphthalene. Findings from a large number of bacterial and mammalian cell mutation assays have been negative. A few studies have shown chromosomal effects (elevated levels of Sister Chromatid Exchange or chromosomal aberrations) in vitro. Naphthalene has been classified as Possibly Carcinogenic to Humans (2B) by IARC, based on findings from studies in laboratory animals.

N-HEXANE: Long-term or repeated exposure to n-hexane can cause peripheral nerve

damage. Initial symptoms are numbness of the fingers and toes. Also, motor weakness can occur in the digits, but may also involve muscles of the arms, thighs and forearms. The onset of these symptoms may be delayed for several months to a year after the beginning of exposure. Testicular atrophy and partial to full loss of the germ cell line were observed in sub-chronic high-dose inhalation studies of laboratory rodents. These effects appeared irreversible. Rodent reproduction studies have shown evidence of reduced fetal weight but no frank malformations.

PENTANES: Studies of pentane isomers in laboratory animals indicate exposure to extremely high levels (roughly 10 vol.%) may induce cardiac arrhythmias (irregular heartbeats) which may be serious or fatal.

ETHANOL: Repeated ingestion of ethanol can result in alcohol abuse, causing behavioral changes, memory loss, impaired judgement, decreased appetite, irregular heartbeats, and decreased fertility. Prolonged and repeated ingestion of ethanol has also been associated with cancers of the mouth, pharynx, esophagus and liver. Ethanol ingestion by pregnant women can cause miscarriage, low birth weight, premature birth and fetal alcohol syndrome. In males, acute and chronic alcohol ingestion may affect gonadal hormone levels. It may also affect the liver, kidney, brain, blood and cardiovascular system.

CARBON MONOXIDE: is a chemical asphyxiant with no warning properties (such as odor). At 400-500 ppm for 1 hour headache and dyspnea may occur. If activity is increased, symptoms of overexposure may include nausea, irritability, increased respiration, tinnitus, sweating, chest pain, confusion, impaired judgement, dizziness, weakness, drowsiness, ataxia, irregular heart beat, cyanosis and pallor. Levels in excess of 1000 ppm can result in collapse, loss of consciousness, respiratory failure and death. Extremely high concentrations (12,800 ppm) can cause immediate unconsciousness and death in 1-3 minutes. Repeated anoxia can lead to central nervous system damage and peripheral neuropathy, with loss of sensation in the fingers, amnesia, and mental deterioration and possible congestive heart failure. Damage may also occur to the fetus, lung, liver, kidney, spleen, cardiovascular system and other organs.

COMBUSTION ENGINE EXHAUST: Chronic inhalation studies of gasoline engine exhaust in mice, rats and hamsters did not produce any carcinogenic effects. Condensates/extracts of gasoline engine exhaust produced an increase in tumors compared to controls when testing by skin painting, subcutaneous injection, intratracheal instillation or implantation into the lungs.

Adverse effects related to the physical, chemical and toxicological characteristics

Signs & Symptoms Nausea, vomiting, signs of nervous system depression: headache, drowsiness, dizziness, loss of coordination, disorientation and fatigue.

Sensitization Not expected to be a skin or respiratory sensitizer.

Mutagenic effects May cause genetic defects.

Carcinogenicity Cancer designations are listed in the table below.

Name	ACGIH (Class)	IARC (Class)	NTP	OSHA
Gasoline 86290-81-5	Confirmed animal carcinogen (A3)	Possibly Carcinogenic (2B)	Not Listed	Not Listed
Toluene 108-88-3	Not Classifiable (A4)	Not Classifiable (3)	Not Listed	Not Listed
Ethyl Alcohol 64-17-5	Confirmed animal carcinogen (A3)	Carcinogenic (1) Alcoholic Beverages	Known to be human carcinogen - Alcoholic Beverage Consumption	Not Listed
Xylene (mixed isomers) 1330-20-7	Not Classifiable (A4)	Not Classifiable (3)	Not Listed	Not Listed
1,2,4 Trimethylbenzene 95-63-6	Not Listed	Not Listed	Not Listed	Not Listed

Benzene 71-43-2	Confirmed human carcinogen (A1)	Carcinogenic to humans (1)	Known to be human carcinogen	Known carcinogen
n-Hexane 110-54-3	Not Listed	Not Listed	Not Listed	Not Listed
Ethylbenzene 100-41-4	Confirmed animal carcinogen (A3)	Possible human carcinogen (2B)	Not Listed	Not Listed
Naphthalene 91-20-3	Confirmed animal carcinogen (A3)	Possible human carcinogen (2B)	Reasonably anticipated to be a human carcinogen	Not Listed

Reproductive toxicity Suspected of damaging fertility or the unborn child.

Specific Target Organ Toxicity (STOT) - single exposure Respiratory system. Central nervous system.

Specific Target Organ Toxicity (STOT) - repeated exposure Not classified.

Aspiration hazard May be fatal if swallowed or vomited and enters airways.

12. ECOLOGICAL INFORMATION

Ecotoxicity This product should be considered toxic to aquatic organisms, with the potential to cause long lasting adverse effects in the aquatic environment.

Name	Algae/aquatic plants	Fish	Toxicity to Microorganisms	Crustacea
Gasoline 86290-81-5	72-hr EC50 = 56 mg/l Algae	96-hr LC50 = 11 mg/l Rainbow trout (static)	-	48-hr LC50 = 7.6 mg/l Daphnia magna
Toluene 108-88-3	72-hr EC50 = 12.5 mg/l Algae	96-hr LC50 <= 10 mg/l Rainbow trout	-	48-hr EC50 = 5.46-9.83 mg/l Daphnia magna 48-hr EC50 = 11.5 mg/l Daphnia magna (Static)
Ethyl Alcohol 64-17-5	-	96-hr LC50 >1,000 mg/l Rainbow Trout (static) 96-hr LC50 >100 mg/l Fathead minnow (static)	-	48-hr LC50 >1,000 mg/l Daphnia magna
Xylene (mixed isomers) 1330-20-7	72-hr EC50 = 11 mg/l Algae	96-hr LC50 = 8 mg/l Rainbow trout	-	48-hr LC50 = 3.82 mg/l Daphnia magna
1,2,4 Trimethylbenzene 95-63-6	-	96-hr LC50 = 7.19-8.28 mg/l Fathead minnow (flow-through)	-	48-hr EC50 = 6.14 mg/L Daphnia magna
Benzene 71-43-2	72-hr EC50 = 29 mg/l Algae	96-hr LC50 = 5.3 mg/l Rainbow trout (flow-through)	-	48-hr EC50 = 8.76-15.6 mg/l Daphnia magna (Static)
n-Hexane 110-54-3	-	96-hr LC50 = 2.5 mg/l Fathead minnow	-	-
Ethylbenzene 100-41-4	72-hr EC50 = 1.7-7.6 mg/l Algae	96-hr LC50 = 4 mg/L Rainbow trout	-	48-hr EC50 = 1-4 mg/L Daphnia magna
Naphthalene 91-20-3	-	96-hr LC50 = 0.91-2.82 mg/l Rainbow trout (static) 96-hr LC50 = 1.99 mg/l Fathead minnow (static)	-	48-hr LC50 = 1.6 mg/l Daphnia magna

Persistence and degradability Expected to be inherently biodegradable. The presence of ethanol in this product may impede the biodegradation of benzene, toluene, ethylbenzene and xylene in groundwater, resulting in elongated plumes of these constituents.

Bioaccumulation Has the potential to bioaccumulate.

Mobility in soil May partition into air, soil and water.

Other adverse effects No information available.

13. DISPOSAL CONSIDERATIONS

Description of Waste Residues

This material may be a flammable liquid waste.

Safe Handling of Wastes

Handle in accordance with applicable local, state, and federal regulations. Use personal protection measures as required. Use appropriate grounding and bonding practices. Use only non-sparking tools. Do not expose to heat, open flames, strong oxidizers or other sources of ignition. No smoking.

Disposal of Wastes / Methods of Disposal

The user is responsible for determining if any discarded material is a hazardous waste (40 CFR 262.11). Dispose of in accordance with federal, state and local regulations.

Methods of Contaminated Packaging Disposal

Empty containers should be completely drained and then discarded or recycled, if possible. Do not cut, drill, grind or weld on empty containers since explosive residues may be present. Dispose of in accordance with federal, state and local regulations.

14. TRANSPORT INFORMATION

DOT (49 CFR 172.101):

UN Proper shipping name:	Gasoline
UN/Identification No:	UN 1203
Transport Hazard Class(es):	3
Packing group:	II

TDG (Canada):

UN Proper shipping name:	Gasoline
UN/Identification No:	UN 1203
Transport Hazard Class(es):	3
Packing group:	II

15. REGULATORY INFORMATION

US Federal Regulatory Information:

US TSCA Chemical Inventory Section 8(b):

This product and/or its components are listed on the TSCA Chemical Inventory.

EPA Superfund Amendment & Reauthorization Act (SARA):

SARA Section 302: This product does not contain any component(s) included on EPA's Extremely Hazardous Substance (EHS) List.

Name	CERCLA/SARA - Section 302 Extremely Hazardous Substances and TPQs
Gasoline	NA
Toluene	NA
Ethyl Alcohol	NA
Xylene (mixed isomers)	NA
1,2,4 Trimethylbenzene	NA
Benzene	NA
n-Hexane	NA
Ethylbenzene	NA
Naphthalene	NA

SARA Section 304: This product may contain component(s) identified either as an EHS or a CERCLA Hazardous substance which in case of a spill or release may be subject to SARA reporting requirements:

Name	CERCLA/SARA - Hazardous Substances and their Reportable Quantities
Gasoline	NA
Toluene	1000 lb final RQ 454 kg final RQ
Ethyl Alcohol	NA
Xylene (mixed isomers)	100 lb final RQ 45.4 kg final RQ
1,2,4 Trimethylbenzene	NA
Benzene	10 lb final RQ 4.54 kg final RQ
n-Hexane	5000 lb final RQ 2270 kg final RQ
Ethylbenzene	1000 lb final RQ 454 kg final RQ
Naphthalene	100 lb final RQ 45.4 kg final RQ

SARA: The following EPA hazard categories apply to this product:

Acute Health Hazard
Chronic Health Hazard
Fire Hazard

SARA Section 313: This product may contain component(s), which if in exceedance of the de minimus threshold, may be subject to the reporting requirements of SARA Title III Section 313 Toxic Release Reporting (Form R).

Name	CERCLA/SARA 313 Emission reporting:
Gasoline	None
Toluene	1.0 % de minimis concentration
Ethyl Alcohol	None
Xylene (mixed isomers)	1.0 % de minimis concentration
1,2,4 Trimethylbenzene	None
Benzene	0.1 % de minimis concentration
n-Hexane	1.0 % de minimis concentration
Ethylbenzene	0.1 % de minimis concentration
Naphthalene	0.1 % de minimis concentration

State and Community Right-To-Know Regulations:

The following component(s) of this material are identified on the regulatory lists below:

Gasoline

Louisiana Right-To-Know:	Not Listed.
California Proposition 65:	Not Listed.
New Jersey Right-To-Know:	SN 0957
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To-Know:	Present
Florida Substance List:	Not Listed.
Rhode Island Right-To-Know:	Not Listed.
Michigan Critical Materials Register List:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed.
California - Regulated Carcinogens:	Not Listed.
Pennsylvania RTK - Special Hazardous Substances:	Not Listed.
New Jersey - Special Hazardous Substances:	Carcinogen; Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	SN 0957 TPQ: 10000 lb (Under N.J.A.C. 7:1G, environmental hazardous substances in mixtures such as gasoline or new and used petroleum oil may be reported under these categories)
Illinois - Toxic Air Contaminants	Present

New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed.
Toluene	
Louisiana Right-To-Know:	Not Listed.
California Proposition 65:	Developmental toxicity, initial date 1/1/91 Female reproductive toxicity, initial date 8/7/09 SN 1866 Environmental hazard Present Not Listed.
New Jersey Right-To-Know:	Toxic (skin); Flammable (skin)
Pennsylvania Right-To-Know:	100 lb Annual usage threshold
Massachusetts Right-To Know:	Not Listed.
Florida Substance List:	Not Listed.
Rhode Island Right-To-Know:	Not Listed.
Michigan Critical Materials Register List:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed.
California - Regulated Carcinogens:	Not Listed.
Pennsylvania RTK - Special Hazardous Substances:	Not Listed.
New Jersey - Special Hazardous Substances:	Flammable - third degree; Teratogen
New Jersey - Environmental Hazardous Substances List:	SN 1866 TPQ: 500 lb
Illinois - Toxic Air Contaminants	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	1000 lb RQ (air); 1 lb RQ (land/water)
Ethyl Alcohol	
Louisiana Right-To-Know:	Not Listed.
California Proposition 65:	Carcinogen, initial date 4/29/11 (in alcoholic beverages) Carcinogen, initial date 7/1/88 (when associated with alcohol abuse) Developmental toxicity, initial date 10/1/87 (in alcoholic beverages) SN 0844 Present Teratogen Not Listed.
New Jersey Right-To-Know:	Toxic; Flammable
Pennsylvania Right-To-Know:	Not Listed.
Massachusetts Right-To Know:	Not Listed.
Florida Substance List:	Not Listed.
Rhode Island Right-To-Know:	Not Listed.
Michigan Critical Materials Register List:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed.
California - Regulated Carcinogens:	Not Listed.
Pennsylvania RTK - Special Hazardous Substances:	Not Listed.
New Jersey - Special Hazardous Substances:	Carcinogen; Flammable - third degree; Mutagen; Teratogen
New Jersey - Environmental Hazardous Substances List:	Not Listed.
Illinois - Toxic Air Contaminants	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed.
Xylene (mixed isomers)	
Louisiana Right-To-Know:	Not Listed.
California Proposition 65:	Not Listed.
New Jersey Right-To-Know:	SN 2014
Pennsylvania Right-To-Know:	Environmental hazard
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed.
Rhode Island Right-To-Know:	Toxic (skin); Flammable (skin)
Michigan Critical Materials Register List:	100 lb Annual usage threshold all isomers
Massachusetts Extraordinarily Hazardous Substances:	Not Listed.
California - Regulated Carcinogens:	Not Listed.
Pennsylvania RTK - Special Hazardous Substances:	Not Listed.
New Jersey - Special Hazardous Substances:	Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	SN 2014 TPQ: 500 lb

Illinois - Toxic Air Contaminants	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	1000 lb RQ (air); 1 lb RQ (land/water)
1,2,4 Trimethylbenzene	
Louisiana Right-To-Know:	Not Listed.
California Proposition 65:	Not Listed.
New Jersey Right-To-Know:	SN 1929
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed.
Rhode Island Right-To-Know:	Toxic
Michigan Critical Materials Register List:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed.
California - Regulated Carcinogens:	Not Listed.
Pennsylvania RTK - Special Hazardous Substances:	Not Listed.
New Jersey - Special Hazardous Substances:	Not Listed.
New Jersey - Environmental Hazardous Substances List:	Not Listed.
Illinois - Toxic Air Contaminants	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed.
Benzene	
Louisiana Right-To-Know:	Not Listed.
California Proposition 65:	Carcinogen, initial date 2/27/87 Developmental toxicity, initial date 12/26/97 Male reproductive toxicity, initial date 12/26/97
New Jersey Right-To-Know:	SN 0197
Pennsylvania Right-To-Know:	Environmental hazard; Special hazardous substance
Massachusetts Right-To Know:	Carcinogen; Extraordinarily hazardous
Florida Substance List:	Not Listed.
Rhode Island Right-To-Know:	Toxic (skin); Flammable (skin); Carcinogen (skin)
Michigan Critical Materials Register List:	100 lb Annual usage threshold
Massachusetts Extraordinarily Hazardous Substances:	Carcinogen; Extraordinarily hazardous
California - Regulated Carcinogens:	Not Listed.
Pennsylvania RTK - Special Hazardous Substances:	Present
New Jersey - Special Hazardous Substances:	Carcinogen; Flammable - third degree; Mutagen
New Jersey - Environmental Hazardous Substances List:	SN 0197 TPQ: 500 lb
Illinois - Toxic Air Contaminants	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	10 lb RQ (air); 1 lb RQ (land/water)
n-Hexane	
Louisiana Right-To-Know:	Not Listed.
California Proposition 65:	Not Listed.
New Jersey Right-To-Know:	SN 1340
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed.
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed.
California - Regulated Carcinogens:	Not Listed.
Pennsylvania RTK - Special Hazardous Substances:	Not Listed.
New Jersey - Special Hazardous Substances:	Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	SN 1340 TPQ: 500 lb
Illinois - Toxic Air Contaminants	Present

New York - Reporting of Releases Part 597 - List of Hazardous Substances:	1 lb RQ (air); 1 lb RQ (land/water)
Ethylbenzene	
Louisiana Right-To-Know:	Not Listed.
California Proposition 65:	Carcinogen, initial date 6/11/04
New Jersey Right-To-Know:	SN 0851
Pennsylvania Right-To-Know:	Environmental hazard
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed.
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed.
California - Regulated Carcinogens:	Not Listed.
Pennsylvania RTK - Special Hazardous Substances:	Not Listed.
New Jersey - Special Hazardous Substances:	Carcinogen; flammable - Third degree
New Jersey - Environmental Hazardous Substances List:	SN 0851 TPQ: 500 lb
Illinois - Toxic Air Contaminants	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	1000 lb RQ (air); 1 lb RQ (land/water)
Naphthalene	
Louisiana Right-To-Know:	Not Listed.
California Proposition 65:	Carcinogen, initial date 4/19/02
New Jersey Right-To-Know:	SN 1322 SN 3758
Pennsylvania Right-To-Know:	Environmental hazard Present (particulate)
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed.
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed.
California - Regulated Carcinogens:	Not Listed.
Pennsylvania RTK - Special Hazardous Substances:	Not Listed.
New Jersey - Special Hazardous Substances:	Carcinogen
New Jersey - Environmental Hazardous Substances List:	SN 1322 TPQ: 500 lb (Reportable at the de minimis quantity of >0.1%)
Illinois - Toxic Air Contaminants	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	100 lb RQ (air); 1 lb RQ (land/water)

Canada DSL/NDL Inventory: This product and/or its components are listed either on the Domestic Substances List (DSL) or are exempt.

Canadian Regulatory Information: "This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the (M)SDS contains all the information required by the Controlled Products Regulations."

Name	Canada - WHMIS: Classifications of Substances:	Canada - WHMIS: Ingredient Disclosure:
Gasoline	B2,D2A,D2B	0.1%
Toluene	B2,D2A,D2B	0.1%
Ethyl Alcohol	B2,D2B	0.1%
Xylene (mixed isomers)	B2,D2A,D2B	m-, o-isomers 1.0%; p-isomer 0.1%
1,2,4 Trimethylbenzene	B3	1
Benzene	B2,D2A,D2B	0.1%
n-Hexane	B2,D2A,D2B	1%
Ethylbenzene	B2,D2A,D2B	0.1%
Naphthalene	B4,D2A	0.1%



NOTE: Not Applicable.

16. OTHER INFORMATION

Prepared By Toxicology and Product Safety
Revision Date: 05/14/2015

Revision Note:

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information is intended as guidance for safe handling, use, processing, storage, transportation, accidental release, clean-up and disposal and is not considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

SAFETY DATA SHEET

Airgas

Helium

Section 1. Identification

GHS product identifier	: Helium
Chemical name	: Helium
Other means of identification	: helium (dot); Helium-4; He; o-Helium; UN 1046, Helium USP
Product use	: Synthetic/Analytical chemistry.
Synonym	: helium (dot); Helium-4; He; o-Helium; UN 1046, Helium USP
SDS #	: 001025
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253
24-hour telephone	: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	: GASES UNDER PRESSURE - Compressed gas

GHS label elements

Hazard pictograms

:



Signal word

: Warning

Hazard statements

: Contains gas under pressure; may explode if heated.
May displace oxygen and cause rapid suffocation.

Precautionary statements

General

: Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction.

Prevention

: Not applicable.

Response

: Not applicable.

Storage

: Protect from sunlight when ambient temperature exceeds 52°C/125°F. Store in a well-ventilated place.

Disposal

: Not applicable.

Hazards not otherwise classified

: In addition to any other important health or physical hazards, this product may displace oxygen and cause rapid suffocation.

Section 3. Composition/information on ingredients

Substance/mixture : Substance
Chemical name : Helium
Other means of identification : helium (dot); Helium-4; He; o-Helium; UN 1046, Helium USP

CAS number/other identifiers

CAS number : 7440-59-7
Product code : 001025

Ingredient name	%	CAS number
Helium	100	7440-59-7

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.

Inhalation : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Skin contact : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur. Wash clothing before reuse. Clean shoes thoroughly before reuse.

Ingestion : As this product is a gas, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : Contact with rapidly expanding gas may cause burns or frostbite.
Inhalation : No known significant effects or critical hazards.
Skin contact : Contact with rapidly expanding gas may cause burns or frostbite.
Frostbite : Try to warm up the frozen tissues and seek medical attention.
Ingestion : As this product is a gas, refer to the inhalation section.

Over-exposure signs/symptoms

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
Specific treatments : No specific treatment.

Section 4. First aid measures

- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Contains gas under pressure. In a fire or if heated, a pressure increase will occur and the container may burst or explode.

- Hazardous thermal decomposition products** : No specific data.

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Avoid contact with eyes, skin and clothing. Avoid breathing gas. Empty containers retain product residue and can be hazardous. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.

Section 7. Handling and storage

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Keep container tightly closed and sealed until ready for use. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F).

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Helium	Oxygen Depletion [Asphyxiant]

Appropriate engineering controls : Good general ventilation should be sufficient to control worker exposure to airborne contaminants.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

Physical state	: Gas. [Compressed gas.]
Color	: Colorless.
Molecular weight	: 4 g/mole
Molecular formula	: He
Boiling/condensation point	: -268.9°C (-452°F)
Melting/freezing point	: -272.2°C (-458°F)
Critical temperature	: -267.9°C (-450.2°F)
Odor	: Odorless.
Odor threshold	: Not available.
pH	: Not available.
Flash point	: [Product does not sustain combustion.]
Burning time	: Not applicable.
Burning rate	: Not applicable.
Evaporation rate	: Not available.
Flammability (solid, gas)	: Not available.
Lower and upper explosive (flammable) limits	: Not available.
Vapor pressure	: Not available.
Vapor density	: 0.14 (Air = 1) Liquid Density@BP: 7.8 lb/ft ³ (125 kg/m ³)
Specific Volume (ft ³ /lb)	: 96.1538
Gas Density (lb/ft ³)	: 0.0104
Relative density	: Not applicable.
Solubility	: Not available.
Solubility in water	: Not available.
Partition coefficient: n-octanol/water	: 0.28
Auto-ignition temperature	: Not available.
Decomposition temperature	: Not available.
SADT	: Not available.
Viscosity	: Not applicable.

Section 10. Stability and reactivity

Reactivity	: No specific test data related to reactivity available for this product or its ingredients.
Chemical stability	: The product is stable.
Possibility of hazardous reactions	: Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid	: No specific data.
Incompatible materials	: No specific data.
Hazardous decomposition products	: Under normal conditions of storage and use, hazardous decomposition products should not be produced.
Hazardous polymerization	: Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 10. Stability and reactivity

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : Contact with rapidly expanding gas may cause burns or frostbite.
Inhalation : No known significant effects or critical hazards.
Skin contact : Contact with rapidly expanding gas may cause burns or frostbite.
Ingestion : As this product is a gas, refer to the inhalation section.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.
Carcinogenicity : No known significant effects or critical hazards.

Section 11. Toxicological information

Mutagenicity	: No known significant effects or critical hazards.
Teratogenicity	: No known significant effects or critical hazards.
Developmental effects	: No known significant effects or critical hazards.
Fertility effects	: No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Helium	0.28	-	low

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1046	UN1046	UN1046	UN1046	UN1046
UN proper shipping name	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED
Transport hazard class(es)	2.2 	2.2 	2.2 	2.2 	2.2 

Section 14. Transport information

Packing group	-	-	-	-	-
Environment	No.	No.	No.	No.	No.
Additional information	<u>Limited quantity</u> Yes. <u>Packaging instruction</u> Passenger aircraft Quantity limitation: 75 kg Cargo aircraft Quantity limitation: 150 kg	Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). <u>Explosive Limit and Limited Quantity Index</u> 0.125 <u>Passenger Carrying Road or Rail Index</u> 75	-	-	<u>Passenger and Cargo Aircraft</u> Quantity limitation: 75 kg <u>Cargo Aircraft Only</u> Quantity limitation: 150 kg

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : TSCA 8(a) CDR Exempt/Partial exemption: Not determined
United States inventory (TSCA 8b): This material is listed or exempted.

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Sudden release of pressure

Composition/information on ingredients

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
Helium	100	No.	Yes.	No.	No.	No.

Section 15. Regulatory information

State regulations

Massachusetts	: This material is listed.
New York	: This material is not listed.
New Jersey	: This material is listed.
Pennsylvania	: This material is listed.

International regulations

International lists

National inventory

Australia	: This material is listed or exempted.
Canada	: This material is listed or exempted.
China	: This material is listed or exempted.
Europe	: This material is listed or exempted.
Japan	: Not determined.
Malaysia	: Not determined.
New Zealand	: This material is listed or exempted.
Philippines	: This material is listed or exempted.
Republic of Korea	: This material is listed or exempted.
Taiwan	: This material is listed or exempted.

Canada

WHMIS (Canada)	: Class A: Compressed gas.
CEPA Toxic substances:	This material is not listed.
Canadian ARET:	This material is not listed.
Canadian NPRI:	This material is not listed.
Alberta Designated Substances:	This material is not listed.
Ontario Designated Substances:	This material is not listed.
Quebec Designated Substances:	This material is not listed.

Section 16. Other information

Canada Label requirements : Class A: Compressed gas.

Hazardous Material Information System (U.S.A.)

Health	0
Flammability	0
Physical hazards	3

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Section 16. Other information

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

Classification	Justification
Press. Gas Comp. Gas, H280	Expert judgment

History

Date of printing : 2/12/2016

Date of issue/Date of revision : 2/12/2016

Date of previous issue : No previous validation

Version : 0.01

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations

References : Not available.

📄 Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Fisher Scientific

Part of Thermo Fisher Scientific

SAFETY DATA SHEET

Creation Date 24-Aug-2009

Revision Date 10-Jan-2017

Revision Number 3

1. Identification

Product Name Hydrochloric Acid

Cat No. : A144-212; A144-212LC; A144-500; A144-500LB; A144-500LC;
A144-612GAL; A144C-212; A144C-212EA; A144P-19; A144P-20;
A144S-212; A144S-212EA; A144S-500; A144SI-212

Synonyms Muriatic acid

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100	Supplier Fisher Scientific UK Bishop Meadow Rd Loughborough, Leicestershire, LE11 5RG Great Britain Tel: 01509 231166	Emergency Telephone Number CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887
---	---	--

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Corrosive to metals	Category 1
Skin Corrosion/irritation	Category 1 B
Serious Eye Damage/Eye Irritation	Category 1
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Respiratory system.	

Label Elements

Signal Word
Danger

Hazard Statements
May be corrosive to metals
Causes severe skin burns and eye damage
May cause respiratory irritation

**Precautionary Statements****Prevention**

Do not breathe dust/fume/gas/mist/vapors/spray
Wash face, hands and any exposed skin thoroughly after handling
Wear protective gloves/protective clothing/eye protection/face protection
Use only outdoors or in a well-ventilated area
Keep only in original container

Response

Immediately call a POISON CENTER or doctor/physician

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
Wash contaminated clothing before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing

Ingestion

IF SWALLOWED: Rinse mouth. DO NOT induce vomiting

Spills

Absorb spillage to prevent material damage

Storage

Store locked up
Store in a well-ventilated place. Keep container tightly closed
Store in corrosive resistant polypropylene container with a resistant inliner
Store in a dry place

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

None identified

3. Composition / information on ingredients

Component	CAS-No	Weight %
Water	7732-18-5	62-65
Hydrochloric acid	7647-01-0	35-38

4. First-aid measures

Eye Contact

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Immediate medical attention is required.

Skin Contact

Wash off immediately with plenty of water for at least 15 minutes. Immediate medical attention is required.

Inhalation

Move to fresh air. If breathing is difficult, give oxygen. Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Immediate medical attention is required.

Ingestion	Do not induce vomiting. Call a physician or Poison Control Center immediately.
Most important symptoms/effects	Causes burns by all exposure routes. Product is a corrosive material. Use of gastric lavage or emesis is contraindicated. Possible perforation of stomach or esophagus should be investigated: Ingestion causes severe swelling, severe damage to the delicate tissue and danger of perforation
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Substance is nonflammable; use agent most appropriate to extinguish surrounding fire.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	No information available
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Corrosive Material. Causes burns by all exposure routes. Thermal decomposition can lead to release of irritating gases and vapors.

Hazardous Combustion Products

Hydrogen chloride gas

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
3

Flammability
0

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Use personal protective equipment. Ensure adequate ventilation. Evacuate personnel to safe areas. Keep people away from and upwind of spill/leak. Do not get in eyes, on skin, or on clothing.
Environmental Precautions	Should not be released into the environment. See Section 12 for additional ecological information.

Methods for Containment and Clean Up Soak up with inert absorbent material. Keep in suitable, closed containers for disposal.

7. Handling and storage

Handling	Wear personal protective equipment. Do not breathe vapors or spray mist. Do not get in eyes, on skin, or on clothing. Do not ingest.
Storage	Keep containers tightly closed in a dry, cool and well-ventilated place. Corrosives area.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Hydrochloric acid	Ceiling: 2 ppm	Ceiling: 5 ppm Ceiling: 7 mg/m ³ (Vacated) Ceiling: 5 ppm (Vacated) Ceiling: 7 mg/m ³	IDLH: 50 ppm Ceiling: 5 ppm Ceiling: 7 mg/m ³

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Hydrochloric acid	Ceiling: 5 ppm Ceiling: 7.5 mg/m ³	Ceiling: 5 ppm Ceiling: 7 mg/m ³	CEV: 2 ppm

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures

Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment**Eye/face Protection**

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Liquid
Appearance	Colorless
Odor	pungent
Odor Threshold	No information available
pH	< 1
Melting Point/Range	-35 °C / -31 °F
Boiling Point/Range	57 °C / 135 °F @ 760 mmHg
Flash Point	No information available
Evaporation Rate	No information available
Flammability (solid,gas)	Not applicable
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	125 mbar @ 20 °C
Vapor Density	1.27
Specific Gravity	1.18
Solubility	Soluble in water
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	1.8 mPa.s @ 15°C
Molecular Formula	HCl.H ₂ O
Molecular Weight	36.46

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products. Excess heat.
Incompatible Materials	Metals, Strong oxidizing agents, Bases, sodium hypochlorite, Amines, Fluorine, Cyanides, Alkaline
Hazardous Decomposition Products	Hydrogen chloride gas
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	Contact with metals may evolve flammable hydrogen gas.

11. Toxicological information

Acute Toxicity

Product Information

Oral LD50

Based on ATE data, the classification criteria are not met. ATE > 2000 mg/kg.

Dermal LD50

Based on ATE data, the classification criteria are not met. ATE > 2000 mg/kg.

Vapor LC50

Based on ATE data, the classification criteria are not met. ATE > 20 mg/l.

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Water	-	Not listed	Not listed
Hydrochloric acid	238 - 277 mg/kg (Rat)	> 5010 mg/kg (Rabbit)	1.68 mg/L (Rat) 1 h

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Causes burns by all exposure routes

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Water	7732-18-5	Not listed	Not listed	Not listed	Not listed	Not listed
Hydrochloric acid	7647-01-0	Not listed	Not listed	Not listed	Not listed	Not listed

IARC: (International Agency for Research on Cancer)

IARC: (International Agency for Research on Cancer)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans

Group 2B - Possibly Carcinogenic to Humans

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed Product is a corrosive material. Use of gastric lavage or emesis is contraindicated. Possible perforation of stomach or esophagus should be investigated: Ingestion causes severe swelling, severe damage to the delicate tissue and danger of perforation

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Do not empty into drains. Large amounts will affect pH and harm aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Hydrochloric acid	-	282 mg/L LC50 96 h Gambusia affinis mg/L LC50 48 h Leuciscus idus	-	56mg/L EC50 72h Daphnia

Persistence and Degradability Persistence is unlikely based on information available.

Bioaccumulation/ Accumulation No information available.

Mobility Will likely be mobile in the environment due to its water solubility.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN1789
 Proper Shipping Name HYDROCHLORIC ACID
 Hazard Class 8
 Packing Group II

TDG

UN-No UN1789
 Proper Shipping Name HYDROCHLORIC ACID
 Hazard Class 8
 Packing Group II

IATA

UN-No UN1789
 Proper Shipping Name Hydrochloric acid
 Hazard Class 8
 Packing Group II

IMDG/IMO

UN-No UN1789
 Proper Shipping Name Hydrochloric acid
 Hazard Class 8
 Packing Group II

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Water	X	X	-	231-791-2	-		X	-	X	X	X
Hydrochloric acid	X	X	-	231-595-7	-		X	X	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Hydrochloric acid	7647-01-0	35-38	1.0

SARA 311/312 Hazard Categories

Acute Health Hazard	Yes
Chronic Health Hazard	Yes
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Hydrochloric acid	X	5000 lb	-	-

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Hydrochloric acid	X		-

OSHA Occupational Safety and Health Administration

Not applicable

Component	Specifically Regulated Chemicals	Highly Hazardous Chemicals
Hydrochloric acid	-	TQ: 5000 lb

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Hydrochloric acid	5000 lb	5000 lb

California Proposition 65 This product does not contain any Proposition 65 chemicals

U.S. State Right-to-Know Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Water	-	-	X	-	-
Hydrochloric acid	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ):	Y
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product contains the following DHS chemicals:

Component	DHS Chemical Facility Anti-Terrorism Standard
Hydrochloric acid	0 lb STQ (anhydrous); 11250 lb STQ (37% concentration or greater)

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D1A Very toxic materials
E Corrosive material

**16. Other information**

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date 24-Aug-2009
Revision Date 10-Jan-2017
Print Date 10-Jan-2017
Revision Summary SDS sections updated; 2; 3; 11
Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

SAFETY DATA SHEET

Isobutylene

Airgas
an Air Liquide company

Section 1. Identification

GHS product identifier	: Isobutylene
Chemical name	: 2-methylpropene
Other means of identification	: 1-Propene, 2-methyl-; Isobutene; Isobutylene; 1-Propene, 2-methyl- (isobutene); 1, 1-Dimethylethylene; Isopropylidenemethylene; iso-Butene; i-Butene; 2-Methylpropylene; 2-Methyl-2-propene; 2-Methyl-1-propene
Product type	: Gas.
Product use	: Synthetic/Analytical chemistry.
Synonym	: 1-Propene, 2-methyl-; Isobutene; Isobutylene; 1-Propene, 2-methyl- (isobutene); 1, 1-Dimethylethylene; Isopropylidenemethylene; iso-Butene; i-Butene; 2-Methylpropylene; 2-Methyl-2-propene; 2-Methyl-1-propene
SDS #	: 001031
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253
24-hour telephone	: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	: FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Liquefied gas

GHS label elements

Hazard pictograms



Signal word : Danger

Hazard statements : Extremely flammable gas.
May form explosive mixtures with air.
Contains gas under pressure; may explode if heated.
May displace oxygen and cause rapid suffocation.

Precautionary statements

General

: Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction. Always keep container in upright position. Approach suspected leak area with caution.

Prevention

: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Response

: Leaking gas fire: Do not extinguish, unless leak can be stopped safely. Eliminate all ignition sources if safe to do so.

Storage

: Protect from sunlight. Store in a well-ventilated place.

Disposal

: Not applicable.

Hazards not otherwise classified

: In addition to any other important health or physical hazards, this product may displace oxygen and cause rapid suffocation.

Section 3. Composition/information on ingredients

Substance/mixture	: Substance
Chemical name	: 2-methylpropene
Other means of identification	: 1-Propene, 2-methyl-; Isobutene; Isobutylene; 1-Propene, 2-methyl- (isobutene); 1, 1-Dimethylethylene; Isopropylidenemethylene; iso-Butene; i-Butene; 2-Methylpropylene; 2-Methyl-2-propene; 2-Methyl-1-propene
Product code	: 001031

CAS number/other identifiers

CAS number : 115-11-7

Ingredient name	%	CAS number
Isobutylene	100	115-11-7

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact	: Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.
Inhalation	: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
Skin contact	: Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. To avoid the risk of static discharges and gas ignition, soak contaminated clothing thoroughly with water before removing it. Get medical attention if symptoms occur. Wash clothing before reuse. Clean shoes thoroughly before reuse.
Ingestion	: As this product is a gas, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact	: No known significant effects or critical hazards.
Inhalation	: No known significant effects or critical hazards.
Skin contact	: No known significant effects or critical hazards.
Frostbite	: Try to warm up the frozen tissues and seek medical attention.
Ingestion	: As this product is a gas, refer to the inhalation section.

Over-exposure signs/symptoms

Eye contact	: No specific data.
Inhalation	: No specific data.
Skin contact	: No specific data.
Ingestion	: No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician	: Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
Specific treatments	: No specific treatment.

Section 4. First aid measures

- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Contains gas under pressure. Extremely flammable gas. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool. If involved in fire, shut off flow immediately if it can be done without risk. If this is impossible, withdraw from area and allow fire to burn. Fight fire from protected location or maximum possible distance. Eliminate all ignition sources if safe to do so.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : Accidental releases pose a serious fire or explosion hazard. No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.
- Use only non-sparking tools. Avoid contact with eyes, skin and clothing. Empty containers retain product residue and can be hazardous. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Eliminate all ignition sources. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F). Keep container tightly closed and sealed until ready for use. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Isobutylene	ACGIH TLV (United States, 3/2017). TWA: 250 ppm 8 hours.

- Appropriate engineering controls** : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Section 8. Exposure controls/personal protection

- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Gas. [Compressed gas.]
- Color** : Colorless.
- Odor** : Characteristic.
- Odor threshold** : Not available.
- pH** : Not available.
- Melting point** : -140.7°C (-221.3°F)
- Boiling point** : -6.9°C (19.6°F)
- Critical temperature** : 144.75°C (292.6°F)
- Flash point** : Closed cup: -76.1°C (-105°F)
- Evaporation rate** : Not available.
- Flammability (solid, gas)** : Extremely flammable in the presence of the following materials or conditions: open flames, sparks and static discharge and oxidizing materials.
- Lower and upper explosive (flammable) limits** : Lower: 1.8%
Upper: 9.6%
- Vapor pressure** : 24.3 (psig)
- Vapor density** : 1.94 (Air = 1)
- Specific Volume (ft³/lb)** : 6.6845
- Gas Density (lb/ft³)** : 0.1496 (25°C / 77 to °F)
- Relative density** : Not applicable.
- Solubility** : Not available.
- Solubility in water** : 0.26 g/l
- Partition coefficient: n-octanol/water** : 2.34
- Auto-ignition temperature** : 465°C (869°F)
- Decomposition temperature** : Not available.
- Viscosity** : Not applicable.
- Flow time (ISO 2431)** : Not available.
- Molecular weight** : 56.12 g/mole
- Aerosol product**
- Heat of combustion** : -45029034 J/kg

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.
- Conditions to avoid** : Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.
- Incompatible materials** : Oxidizers
- Hazardous decomposition products** : Under normal conditions of storage and use, hazardous decomposition products should not be produced.
- Hazardous polymerization** : Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Isobutylene	LC50 Inhalation Vapor	Rat	550000 mg/m ³	4 hours

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.

Section 11. Toxicological information

- Inhalation** : No known significant effects or critical hazards.
Skin contact : No known significant effects or critical hazards.
Ingestion : As this product is a gas, refer to the inhalation section.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
Potential delayed effects : Not available.

Long term exposure

- Potential immediate effects** : Not available.
Potential delayed effects : Not available.

Potential chronic health effects

Not available.

- General** : No known significant effects or critical hazards.
Carcinogenicity : No known significant effects or critical hazards.
Mutagenicity : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Isobutylene	2.34	-	low

Mobility in soil

- Soil/water partition coefficient (K_{oc})** : Not available.






Section 12. Ecological information

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1055	UN1055	UN1055	UN1055	UN1055
UN proper shipping name	ISOBUTYLENE	ISOBUTYLENE	ISOBUTYLENE	ISOBUTYLENE	ISOBUTYLENE
Transport hazard class(es)	2.1 	2.1 	2.1 	2.1 	2.1 
Packing group	-	-	-	-	-
Environmental hazards	No.	No.	No.	No.	No.

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Additional information

DOT Classification

: **Limited quantity** Yes.
Quantity limitation Passenger aircraft/rail: Forbidden. Cargo aircraft: 150 kg.
Special provisions 19, T50

TDG Classification

: Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2).
Explosive Limit and Limited Quantity Index 0.125
ERAP Index 3000
Passenger Carrying Ship Index Forbidden
Passenger Carrying Road or Rail Index Forbidden
Special provisions 29

IATA

: **Quantity limitation** Passenger and Cargo Aircraft: Forbidden. Cargo Aircraft Only: 150 kg.

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : TSCA 8(a) CDR Exempt/Partial exemption: Not determined
Clean Air Act (CAA) 112 regulated flammable substances: Isobutylene

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Refer to Section 2: Hazards Identification of this SDS for classification of substance.

State regulations

Massachusetts : This material is listed.

New York : This material is not listed.

New Jersey : This material is listed.

Pennsylvania : This material is listed.

International regulations

Chemical Weapon Convention List Schedules I, II & III Chemicals

Not listed.

Montreal Protocol (Annexes A, B, C, E)

Not listed.

Stockholm Convention on Persistent Organic Pollutants

Not listed.

Rotterdam Convention on Prior Informed Consent (PIC)

Not listed.

UNECE Aarhus Protocol on POPs and Heavy Metals

Not listed.

Inventory list

Australia : This material is listed or exempted.

Canada : This material is listed or exempted.

China : This material is listed or exempted.

Europe : This material is listed or exempted.

Japan : **Japan inventory (ENCS)**: This material is listed or exempted.
Japan inventory (ISHL): Not determined.

Malaysia : Not determined.

New Zealand : This material is listed or exempted.

Philippines : This material is listed or exempted.

Republic of Korea : This material is listed or exempted.

Section 15. Regulatory information

Taiwan	: This material is listed or exempted.
Thailand	: Not determined.
Turkey	: Not determined.
United States	: This material is listed or exempted.
Viet Nam	: Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

Health	/	1
Flammability		4
Physical hazards		3

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

Classification	Justification
FLAMMABLE GASES - Category 1	Expert judgment
GASES UNDER PRESSURE - Liquefied gas	Expert judgment

History

Date of printing : 5/10/2018

Date of issue/Date of revision : 5/10/2018

Date of previous issue : 7/11/2016

Version : 0.02

Key to abbreviations

: ATE = Acute Toxicity Estimate
 BCF = Bioconcentration Factor
 GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 IATA = International Air Transport Association
 IBC = Intermediate Bulk Container
 IMDG = International Maritime Dangerous Goods
 LogPow = logarithm of the octanol/water partition coefficient
 MARPOL = International Convention for the Prevention of Pollution From Ships, 1973

Section 16. Other information

as modified by the Protocol of 1978. ("Marpol" = marine pollution)

UN = United Nations

References

: Not available.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SAFETY DATA SHEET

Isopropyl Alcohol (Isopropanol)

Section 1. Identification

GHS product identifier	: Isopropyl Alcohol (Isopropanol)
Chemical name	: Isopropyl alcohol
Other means of identification	: propan-2-ol; 2-Propanol; isopropanol; isopropyl alcohol
Product use	: Synthetic/Analytical chemistry.
Synonym	: propan-2-ol; 2-Propanol; isopropanol; isopropyl alcohol
SDS #	: 001105
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253
Emergency telephone number (with hours of operation)	: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	: FLAMMABLE LIQUIDS - Category 2 SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2 SPECIFIC TARGET ORGAN TOXICITY (SINGLE EXPOSURE) (Narcotic effects) - Category 3

GHS label elements

Hazard pictograms



Signal word

: Danger

Hazard statements

: Highly flammable liquid and vapor.
May form explosive mixtures with air.
Causes serious eye irritation.
May cause drowsiness and dizziness.

Precautionary statements

General

: Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention

: Wear protective gloves. Wear eye or face protection. Keep away from heat, sparks, open flames and hot surfaces. - No smoking. Use explosion-proof electrical, ventilating, lighting and all material-handling equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Keep container tightly closed. Use only outdoors or in a well-ventilated area. Avoid breathing vapor. Wash hands thoroughly after handling. Use and store only outdoors or in a well ventilated place.

Section 2. Hazards identification

Response	: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.
Storage	: Store locked up. Store in a well-ventilated place. Keep cool.
Disposal	: Dispose of contents and container in accordance with all local, regional, national and international regulations.
Hazards not otherwise classified	: None known.

Section 3. Composition/information on ingredients

Substance/mixture	: Substance
Chemical name	: Isopropyl alcohol
Other means of identification	: propan-2-ol; 2-Propanol; isopropanol; isopropyl alcohol

CAS number/other identifiers

CAS number	: 67-63-0
Product code	: 001105

Ingredient name	%	CAS number
propan-2-ol	100	67-63-0

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact	: Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
Inhalation	: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If necessary, call a poison center or physician. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
Skin contact	: Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur. Wash clothing before reuse. Clean shoes thoroughly before reuse.
Ingestion	: Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. If necessary, call a poison center or physician. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention.

Section 4. First aid measures

immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness and dizziness.
- Skin contact** : No known significant effects or critical hazards.
- Frostbite** : Try to warm up the frozen tissues and seek medical attention.
- Ingestion** : Can cause central nervous system (CNS) depression. Irritating to mouth, throat and stomach.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
- Skin contact** : No specific data.
- Ingestion** : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use dry chemical, CO₂, water spray (fog) or foam.
- Unsuitable extinguishing media** : Do not use water jet.

- Specific hazards arising from the chemical** : Highly flammable liquid and vapor. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. The vapor/gas is heavier than air and will spread along the ground. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Runoff to sewer may create fire or explosion hazard.

Section 5. Fire-fighting measures

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing vapor or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Take precautionary measures against electrostatic discharges. Empty containers retain product residue and can be hazardous. Do not reuse container.

Section 7. Handling and storage

Advice on general occupational hygiene

: Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities

: Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
propan-2-ol	<p>ACGIH TLV (United States, 3/2012). TWA: 200 ppm 8 hours. STEL: 400 ppm 15 minutes.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 400 ppm 8 hours. TWA: 980 mg/m³ 8 hours. STEL: 500 ppm 15 minutes. STEL: 1225 mg/m³ 15 minutes.</p> <p>NIOSH REL (United States, 1/2013). TWA: 400 ppm 10 hours. TWA: 980 mg/m³ 10 hours. STEL: 500 ppm 15 minutes. STEL: 1225 mg/m³ 15 minutes.</p> <p>OSHA PEL (United States, 6/2010). TWA: 400 ppm 8 hours. TWA: 980 mg/m³ 8 hours.</p>

Appropriate engineering controls

: Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures

: Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Section 8. Exposure controls/personal protection

- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid. [COLORLESS LIQUID WITH THE ODOR OF RUBBING ALCOHOL]
- Color** : Colorless.
- Molecular weight** : 60.11 g/mole
- Molecular formula** : C₃H₈O
- Boiling/condensation point** : 83°C (181.4°F)
- Melting/freezing point** : -90°C (-130°F)
- Critical temperature** : Not available.
- Odor** : Alcohol-like.
- Odor threshold** : Not available.
- pH** : Not available.
- Flash point** : Closed cup: 11.7°C (53.1°F)
- Burning time** : Not applicable.
- Burning rate** : Not applicable.
- Evaporation rate** : 1.7 (butyl acetate = 1)
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Lower: 2%
Upper: 12%
- Vapor pressure** : 4.4 kPa (33.002681467 mm Hg) [room temperature]
- Vapor density** : 2.1 (Air = 1)
- Specific Volume (ft³/lb)** : 1.2739
- Gas Density (lb/ft³)** : 0.785
- Relative density** : 0.79

Section 9. Physical and chemical properties

Solubility	: Not available.
Solubility in water	: Not available.
Partition coefficient: n-octanol/water	: 0.05
Auto-ignition temperature	: 456°C (852.8°F)
Decomposition temperature	: Not available.
SADT	: Not available.
Viscosity	: Not available.

Section 10. Stability and reactivity

Reactivity	: No specific test data related to reactivity available for this product or its ingredients.
Chemical stability	: The product is stable.
Possibility of hazardous reactions	: Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid	: Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Do not allow vapor to accumulate in low or confined areas.
Incompatibility with various substances	: Highly reactive or incompatible with the following materials: acids and moisture.
Hazardous decomposition products	: Under normal conditions of storage and use, hazardous decomposition products should not be produced.
Hazardous polymerization	: Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
propan-2-ol	LC50 Inhalation Gas.	Rat	45248 ppm	1 hours
	LD50 Dermal	Rabbit	12800 mg/kg	-
	LD50 Oral	Rat	5000 mg/kg	-

Irritation/Corrosion

Product/ingredient name	Result	Species	Score	Exposure	Observation
propan-2-ol	Eyes - Moderate irritant	Rabbit	-	24 hours 100 milligrams	-
	Eyes - Moderate irritant	Rabbit	-	10 milligrams	-
	Eyes - Severe irritant	Rabbit	-	100 milligrams	-
	Skin - Mild irritant	Rabbit	-	500 milligrams	-

Sensitization

Not available.

Section 11. Toxicological information

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

Product/ingredient name	OSHA	IARC	NTP
propan-2-ol	-	3	-

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Name	Category	Route of exposure	Target organs
propan-2-ol	Category 3	Not applicable.	Narcotic effects

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : Can cause central nervous system (CNS) depression. May cause drowsiness and dizziness.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : Can cause central nervous system (CNS) depression. Irritating to mouth, throat and stomach.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : Adverse symptoms may include the following:
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness
- Skin contact** : No specific data.
- Ingestion** : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Date of issue/Date of revision : 5/20/2015. **Date of previous issue** : 10/28/2014. **Version** : 0.02 8/14

Section 11. Toxicological information

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Product/ingredient name	Result	Species	Exposure
propan-2-ol	Acute LC50 1400000 to 1950000 µg/l Marine water	Crustaceans - Crangon crangon	48 hours
	Acute LC50 4200 mg/l Fresh water	Fish - Rasbora heteromorpha	96 hours

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
propan-2-ol	0.05	-	low

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapor from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1219	UN1219	UN1219	UN1219	UN1219
UN proper shipping name	ISOPROPANOL OR ISOPROPYL ALCOHOL	ISOPROPANOL; OR ISOPROPYL ALCOHOL	ISOPROPANOL OR ISOPROPYL ALCOHOL	ISOPROPANOL (ISOPROPYL ALCOHOL)	ISOPROPANOL
Transport hazard class(es)	3 	3 	3 	3 	3 
Packing group	II	II	II	II	II
Environment	No.	No.	No.	No.	No.
Additional information	<u>Limited quantity</u> Yes. <u>Packaging instruction</u> Passenger aircraft Quantity limitation: 5 L Cargo aircraft Quantity limitation: 60 L <u>Special provisions</u> IB2, T4, TP1	<u>Explosive Limit and Limited Quantity Index</u> 1 <u>Passenger Carrying Road or Rail Index</u> 5	-	-	<u>Passenger and Cargo Aircraft</u> Quantity limitation: 5 L <u>Cargo Aircraft Only</u> Quantity limitation: 60 L <u>Limited Quantities - Passenger Aircraft</u> Quantity limitation: 1 L

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : TSCA 8(a) CDR Exempt/Partial exemption: Not determined
United States inventory (TSCA 8b): This material is listed or exempted.

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Fire hazard
 Immediate (acute) health hazard

Composition/information on ingredients

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
propan-2-ol	100	Yes.	No.	No.	Yes.	No.

SARA 313

	Product name	CAS number	%
Form R - Reporting requirements	Isopropyl alcohol	67-63-0	100
Supplier notification	Isopropyl alcohol	67-63-0	100

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : This material is listed.
New York : This material is not listed.
New Jersey : This material is listed.
Pennsylvania : This material is listed.
Canada inventory : This material is listed or exempted.

International regulations

Section 15. Regulatory information

International lists :

- Australia inventory (AICS):** This material is listed or exempted.
- China inventory (IECSC):** This material is listed or exempted.
- Japan inventory:** This material is listed or exempted.
- Korea inventory:** This material is listed or exempted.
- Malaysia Inventory (EHS Register):** Not determined.
- New Zealand Inventory of Chemicals (NZIoC):** This material is listed or exempted.
- Philippines inventory (PICCS):** This material is listed or exempted.
- Taiwan inventory (CSNN):** Not determined.

Chemical Weapons Convention List Schedule I Chemicals : Not listed

Chemical Weapons Convention List Schedule II Chemicals : Not listed

Chemical Weapons Convention List Schedule III Chemicals : Not listed

Canada

WHMIS (Canada) :

- Class B-2: Flammable liquid
- Class D-2B: Material causing other toxic effects (Toxic).
- CEPA Toxic substances:** This material is not listed.
- Canadian ARET:** This material is not listed.
- Canadian NPRI:** This material is listed.
- Alberta Designated Substances:** This material is not listed.
- Ontario Designated Substances:** This material is not listed.
- Quebec Designated Substances:** This material is not listed.

Section 16. Other information

Canada Label requirements :

- Class B-2: Flammable liquid
- Class D-2B: Material causing other toxic effects (Toxic).

Hazardous Material Information System (U.S.A.)

Health	*	2
Flammability		3
Physical hazards		0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Section 16. Other information

Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

History

Date of printing : 5/20/2015.

Date of issue/Date of revision : 5/20/2015.

Date of previous issue : 10/28/2014.

Version : 0.02

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations
- ACGIH – American Conference of Governmental Industrial Hygienists
- AIHA – American Industrial Hygiene Association
- CAS – Chemical Abstract Services
- CEPA – Canadian Environmental Protection Act
- CERCLA – Comprehensive Environmental Response, Compensation, and Liability Act (EPA)
- CFR – United States Code of Federal Regulations
- CPR – Controlled Products Regulations
- DSL – Domestic Substances List
- GWP – Global Warming Potential
- IARC – International Agency for Research on Cancer
- ICAO – International Civil Aviation Organisation
- Inh – Inhalation
- LC – Lethal concentration
- LD – Lethal dosage
- NDSL – Non-Domestic Substances List
- NIOSH – National Institute for Occupational Safety and Health
- TDG – Canadian Transportation of Dangerous Goods Act and Regulations
- TLV – Threshold Limit Value
- TSCA – Toxic Substances Control Act
- WEEL – Workplace Environmental Exposure Level
- WHMIS – Canadian Workplace Hazardous Material Information System

References : Not available.

Indicates information that has changed from previously issued version.

Notice to reader

Section 16. Other information

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Safety Data Sheet
according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), and
GHS

Effective date: 05/12/2015

Revision: 05/12/2015

LIQUINOX

1 Identification of the Substance/mixture and of the Company/Undertaking

1.1 Product identifier

Trade name: **LIQUINOX**

Application of the substance / the preparation: Hand detergent.

1.2 Relevant identified uses of the substance or mixture and uses advised against:

No additional information available.

1.3 Details of the supplier of the Safety Data Sheet

Manufacturer/Supplier:

Alconox, Inc.
30 Glenn St., Suite 309
White Plains, NY 10603
Phone: 914-948-4040



Further information obtainable from: Product Safety Department.

1.4 Emergency telephone number:

ChemTel Inc.: (800)255-3924, +1 (813)248-0585

2 Hazards Identification

2.1 Classification of the substance or mixture

Classification according to Regulation (EC) No 1272/2008:

Classification according to Directive 67/548/EEC or Directive 1999/45/EC:



GHS07

Skin Irrit. 2, H315: Causes skin irritation.

Information concerning particular hazards for human and environment:

The product has to be labelled due to the calculation procedure of the "General Classification guideline for preparations of the EU" in the latest valid version.

Classification system:

The classification is according to the latest editions of the EU-lists, and extended by company and literature data

2.2 Label elements

Labelling according to Regulation (EC) No 1272/2008:

The product is classified and labelled according to the CLP regulation.

Hazard pictograms:

GHS07

Signal word: Warning**Hazard-determining components of labelling:**

Alkyl benzene sulfonic acid, sodium salt.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), and
GHS

Effective date: 05/12/2015

Revision: 05/12/2015

LIQUINOX

Hazard statements:

H315: Causes skin irritation.

Precautionary statements:


P332+P313: If skin irritation occurs: Get medical advice/attention.

P302+P352: IF ON SKIN: Wash with plenty of soap and water.

P501: Dispose of contents/container in accordance with local/regional/national/international regulations.

Other Hazard description:**WHMIS-classification and symbols:**

D2B - Toxic material causing other toxic effects

**NFPA ratings (scale 0 - 4)**

Health = 1

Fire = 0

Reactivity = 0

HMIS-ratings (scale 0 - 4)

HEALTH	1
FIRE	0
REACTIVITY	0

Health = 1

Fire = 0

Reactivity = 0

2.3 Other hazards**Results of PBT and vPvB assessment**

PBT: Not applicable.

vPvB: Not applicable.

3 Composition/Information on Ingredients

3.2 Chemical characterization: Mixture**Description:** Hazardous ingredients of mixture listed below.

Identifying Nos.	Description	Wt. %
CAS: 68081-81-2	Alkyl benzene sulfonic acid, sodium salt	10 - 25%
CAS: 1300-72-7 EINECS: 215-090-9	Sodium xylene sulphonate	2.5 - 10%
CAS: 84133-50-6	Alcohol Ethoxylate	2.5 - 10%
CAS: 68603-42-9 EINECS: 271-657-0	Coconut diethanolamide	2.5 - 10%
CAS: 17572-97-3 EINECS: 241-543-5	Ethylenediaminetetraacetic acid, tripotassium salt	2.5 - 10%

Additional information: For the wording of the listed risk phrases refer to section 16.

Safety Data Sheet
according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), and
GHS

Effective date: 05/12/2015

Revision: 05/12/2015

LIQUINOX

4 First Aid Measures**4.1 Description of first aid measures****General information:**

Take affected persons out into the fresh air.

After inhalation:

Supply fresh air; consult doctor in case of complaints.

After skin contact:

Immediately wash with water and soap and rinse thoroughly for 30 minutes. If skin irritation continues, consult a doctor.

After eye contact:

Remove contact lenses if worn.

Rinse opened eye for at least 30 minutes under running water, lifting upper and lower lids occasionally. Immediately consult a doctor.

After swallowing:

Do not induce vomiting; call for medical help immediately. Rinse out mouth and then drink plenty of water.

A person vomiting while laying on their back should be turned onto their side.

4.2 Most important symptoms and effects, both acute and delayed:

Irritating, all routes of exposure.

4.3 Indication of any immediate medical attention and special treatment needed:

No additional information available.

5 Firefighting Measures**5.1 Extinguishing media:****Suitable extinguishing agents:**

CO₂, powder or water spray. Fight larger fires with water spray or alcohol resistant foam.

5.2 Special hazards arising from the substance or mixture:

No additional information available.

5.3 Advice for firefighters:**Protective equipment:**

Wear self-contained respiratory protective device.

Wear fully protective suit.

6 Accidental Release Measures**6.1 Personal precautions, protective equipment and emergency procedures:**

Ensure adequate ventilation.

Particular danger of slipping on leaked/spilled product.

6.2 Environmental precautions:

Dilute with plenty of water.

Do not allow to enter sewers/ surface or ground water.

6.3 Methods and material for containment and cleaning up:

Absorb with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust).

Clean the affected area carefully; suitable cleaners are: Warm water

Dispose contaminated material as waste according to item 13. Ensure adequate ventilation.

6.4 Reference to other sections:

See Section 7 for information on safe handling.

See Section 8 for information on personal protection equipment.

See Section 13 for disposal information

7 Handling and Storage**7.1 Precautions for safe handling:**

No special precautions are necessary if used correctly.

Information about fire - and explosion protection:

No special measures required.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), and
GHS

Effective date: 05/12/2015

Revision: 05/12/2015

LIQUINOX

7.2 Conditions for safe storage, including any incompatibilities:

Storage:**Requirements to be met by storerooms and receptacles:** No special requirements.**Information about storage in one common storage facility:** No special requirements.**Further information about storage conditions:** None

7.3 Specific end use(s):

 No additional information available.

8 Exposure Controls/Personal Protection

8.1 Control parameters

Ingredients with limit values that require monitoring at the workplace:

The product does not contain any relevant quantities of materials with critical values that have to be monitored at the workplace.

Additional information: The lists valid during the making were used as basis.

8.2 Exposure controls:

Personal protective equipment:**General protective and hygienic measures:**

Keep away from foodstuffs, beverages and feed.

Immediately remove all soiled and contaminated clothing.

Wash hands before breaks and at the end of work.

Avoid contact with the eyes and skin.

Respiratory protection:

Not required under normal conditions of use.

Protection of hands:

Protective gloves

The glove material has to be impermeable and resistant to the product. Selection of the glove material should be based on the penetration time, rates of diffusion and the degradation of the glove material.

Material of gloves:

The selection of a suitable gloves does not only depend on the material, but also on the quality, and varies from manufacturer to manufacturer.

Penetration time of glove material:

The exact break through time has to be determined by the manufacturer of the protective gloves. DO NOT exceed the breakthrough time set by the Manufacturer.

For long term contact, gloves made of the following materials are considered suitable:

Butyl rubber, BR

Nitrile rubber, NBR

Natural rubber (NR)

Neoprene gloves

Eye protection:

Safety glasses

Goggles recommended during refilling.

Body protection: Protective work clothing

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), and
GHS

Effective date: 05/12/2015

Revision: 05/12/2015

LIQUINOX

9 Physical and Chemical Properties

9.1 Information on basic physical and chemical properties:

General Information:

Appearance:

Form:	Liquid
Color:	Light Yellow
Odor:	Odorless
Odor threshold:	Not determined.
pH-value:	8.5

Change in condition:

Melting point/Melting range:	Not determined.
Boiling point/Boiling range:	100°C

Flash point: Not applicable.

Flammability (solid, gaseous): Not applicable.

Ignition temperature: Not applicable.

Decomposition temperature: Not determined.

Self-igniting: Product is not selfigniting.

Danger of explosion: Product does not present an explosion hazard.

Explosion limits:

Lower:	Not determined.
Upper:	Not determined.

Vapor pressure at 20°C: 23 hPa

Density: 1.08 g/cm³

Relative density: Not determined.

Vapor density: Not determined.

Evaporation rate: Not determined.

Solubility in / Miscibility with water: Fully miscible.

Segregation coefficient (n-octanol/water): Not determined.

Viscosity:

Dynamic:	Not determined.
Kinematic:	Not determined.

Solvent content:

Organic solvents:	Not determined.
Solids content:	Not determined.

9.2 Other information: No additional information available.

10 Stability and Reactivity

10.1 Reactivity:

10.2 Chemical stability:

Thermal decomposition / conditions to be avoided:

No decomposition if used according to specifications.

10.3 Possibility of hazardous reactions:

Reacts with strong oxidizing agents. Reacts with strong acids.

10.4 Conditions to avoid:

No additional information available.

10.5 Incompatible materials:

No additional information available.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), and
GHS

Effective date: 05/12/2015

Revision: 05/12/2015

LIQUINOX

10.6 Hazardous decomposition products:

Carbon monoxide and carbon dioxide
Sulphur oxides (SO_x)
Nitrogen oxides

11 Toxicological Information

11.1 Information on toxicological effects:**Toxicity data:** Toxicity data is available for mixture:**Primary irritant effect:****On the skin:** Irritating to skin and mucous membranes.**On the eye:** Strong irritant with the danger of severe eye injury.**Sensitization:** No sensitizing effects known.**Additional toxicological information:**

The product shows the following dangers according to the calculation method of the General EU Classification Guidelines for Preparations as issued in the latest version: Irritant

12 Ecological Information

12.1 Toxicity:**Aquatic toxicity:** No additional information available.**12.2 Persistence and degradability:** Biodegradable.**12.3 Bioaccumulative potential:** Does not accumulate in organisms.**12.4 Mobility in soil:** No additional information available.**Additional ecological information:****General notes:**

Water hazard class 1 (German Regulation) (Self-assessment): slightly hazardous for water.

Do not allow undiluted product or large quantities of it to reach ground water, water course or sewage system.

Must not reach sewage water or drainage ditch undiluted or un-neutralized.

12.5 Results of PBT and vPvB assessment:**PBT:** Not applicable.**vPvB:** Not applicable.**12.6 Other adverse effects:** No additional information available.

13 Disposal Considerations

13.1 Waste treatment methods:**Recommendation:**

Smaller quantities can be disposed of with household waste.

Small amounts may be diluted with plenty of water and washed away. Dispose of bigger amounts in accordance with Local Authority requirements.

The surfactant used in this product complies with the biodegradability criteria as laid down in Regulation (EC) No. 648/2004 on detergents. Data to support this assertion are held at the disposal of the competent authorities of the Member States and will be made available to them, at their direct request or at the request of a detergent manufacturer.

Uncleaned packaging:**Recommendation:** Disposal must be made according to official regulations.**Recommended cleansing agents:** Water, together with cleansing agents, if necessary.

14 Transport Information

14.1 UN-Number:

DOT, ADR, ADN, IMDG, IATA:

Not Regulated

14.2 UN proper shipping name:

DOT, ADR, IMDG, IATA:

Not Regulated

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), and
GHS

Effective date: 05/12/2015

Revision: 05/12/2015

LIQUINOX

14.3 Transport hazard class(es):

DOT, ADR, IMDG, IATA:

Class:

Not Regulated

Label:

-

14.4 Packing group:

DOT, ADR, IMDG, IATA:

Not Regulated

14.5 Environmental hazards:

Marine pollutant:

No

14.6 Special precautions for user:

Not applicable.

14.7 Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code: Not applicable.

UN "Model Regulation":

Not Regulated

15 Regulatory Information

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture:

United States (USA):

SARA:

Section 355 (extremely hazardous substances): None of the ingredient is listed.

Section 313 (Specific toxic chemical listings): None of the ingredient is listed.

TSCA (Toxic Substances Control Act): All ingredients are listed.

Proposition 65 (California):

Chemicals known to cause cancer: None of the ingredient is listed.

Chemicals known to cause reproductive toxicity for females: None of the ingredient is listed.

Chemicals known to cause reproductive toxicity for males: None of the ingredient is listed.

Chemicals known to cause developmental toxicity: None of the ingredient is listed.

Carcinogenic Categories:

EPA (Environmental Protection Agency): None of the ingredient is listed.

TLV (Threshold Limit Value established by ACGIH): None of the ingredient is listed.

NIOSH-Ca (National Institute for Occupational Safety and Health): None of the ingredient is listed.

OSHA-Ca (Occupational Safety & Health Administration): None of the ingredient is listed.

Canadá:

Canadian Domestic Substances List (DSL): All ingredients are listed.

Canadian Ingredient Disclosure list (limit 0.1%): None of the ingredient is listed.

Canadian Ingredient Disclosure list (limit 1%): None of the ingredient is listed.

15.2 Chemical safety assessment: A Chemical Safety Assessment has not been carried out.

16 Other Information

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

Relevant phrases:

H315: Causes skin irritation.

Safety Data Sheet
according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), and
GHS

Effective date: 05/12/2015

Revision: 05/12/2015

LIQUINOX

Abbreviations and Acronyms:

ADR: European Agreement concerning the International Carriage of Dangerous Goods by Road.
IMDG: International Maritime Code for Dangerous Goods.
DOT: US Department of Transportation.
IATA: International Air Transport Association.
GHS: Globally Harmonized System of Classification and Labelling of Chemicals.
ACGIH: American Conference of Governmental Industrial Hygienists.
NFPA: National Fire Protection Association (USA).
HMIS: Hazardous Materials Identification System (USA).
WHMIS: Workplace Hazardous Materials Information System (Canada).
VOC: Volatile Organic Compounds (USA, EU).
LC50: Lethal concentration, 50 percent.
LD50: Lethal dose, 50 percent.

SDS Created by:

Global Safety Management, Inc.
10006 Cross Creek Blvd
Tampa, FL, 33647
Tel: 1-844-GSM-INFO (1-844-476-4636)
Website: www.GSMSDS.com

U.S. SILICA COMPANY SAFETY DATA SHEET



Section 1: Chemical Product and Company Information

1.1 Product Identifier

Product Name: Silica Sand, Ground Silica and Fine Ground Silica Sand and Ground Silica Sand (sold under various names): ASTM TESTING SANDS • GLASS SAND • FILPRO® • FLINT SILICA • DM-SERIES • F-SERIES • FOUNDRY SANDS • FJ-SERIES H-SERIES • L-SERIES • N-SERIES • NJ SERIES • OK-SERIES • P-SERIES • T-SERIES • hydraulic fracturing sand, all sizes • frac sand, all sizes • MIN-U-SIL® Fine Ground Silica • MYSTIC WHITE® • #1 DRY • #1 SPECIAL • PENN SAND® • PRO WHITE® • SILURIAN® • Q-ROK® • SIL-CO-SIL® Ground Silica • MICROSIL® • SUPERSIL® • MASON SAND • GS SERIES • PERSPEC • proppant, all sizes • SHALE FRAC® - SERIES • KOSSE WHITE® • OTTAWA WHITE® • OPTIJUMP® • LIGHTHOUSE™.

Chemical Name or Synonym: Crystalline Silica (Quartz), Sand, Silica Sand, Flint, Ground Silica, Fine Ground Silica, Silica Flour.

CAS No.: 14808-60-7

EINECS No.: 238-878-4

REACH Registration No.: Not applicable

1.2 Relevant Identified Uses of the Substance or Mixture and Uses Advised Against

Product Use: (non-exhaustive list): brick, ceramics, foundry castings, glass, grout, hydraulic, fracturing sand, frac sand, proppant, mortar, paint and coatings, silicate chemistry, silicone, rubber, thermoset plastics.

DO NOT USE U.S. SILICA COMPANY SAND OR GROUND SILICA FOR SAND BLASTING

1.3 Details of the Supplier of the Safety Data Sheet

Manufacturer: U.S. Silica Company
8490 Progress Drive, Suite 300
Fredrick, MD 21701 USA
Information Phone: 800-243-7500

1.4 Emergency Telephone Number

800-424-9300 (Chemtrec) +1-703-527-3887 for International Calls

SDS Date of Preparation/Revision: 1 May 2017

Section 2: Hazards Identification

2.1 Classification of the Substance or Mixture

EU Classification (1272/2008): Specific Target Organ Toxicity Repeated Exposure Category 1

2.2 Label Elements:



DANGER

H372 Causes damage to lungs through prolonged or repeated exposure by inhalation.

P260 Do not breathe dust.

P285 In case of inadequate ventilation wear respiratory protection.

P501 Dispose of contents/containers in accordance with local regulations.

2.3 Other Hazards: None identified

Section 3: Composition/Information on Ingredients

3.1 Substance

Component	CAS Number/ EINECS Number	Amount	EU/CLP Classification (1272/2008)
Crystalline Silica (quartz)	14808-60-7 / 238-878-4	95-99.9%	STOT RE 1 (H372)

Refer to Section 16 for Full Text of EU/CLP Classes and H Statements

Section 4: First Aid Measures

4.1 Description of First Aid Measures

First Aid

Eyes: Wash immediately with plenty of water. Do not rub eyes. If irritation persists, seek medical attention.

Skin: First aid is not required.

Ingestion: If large amounts are swallowed, get immediate medical attention.

Inhalation: First aid is not generally required. If irritation develops from breathing dust, move the person from the overexposure and seek medical attention if needed.

See Section 11 for more detailed information on health effects.

4.2 Most Important symptoms and effects, both acute and delayed: Particulates may cause abrasive eye injury. Inhalation of dust may cause respiratory tract irritation. Symptoms of exposure may include cough, sore throat, nasal congestion, sneezing, wheezing and shortness of breath. Prolonged inhalation of respirable crystalline silica above certain concentrations may cause lung diseases, including silicosis and lung cancer.

4.3 Indication of any immediate medical attention and special treatment needed: Immediate medical attention is not required.

Section 5: Fire Fighting Measures

5.1 Extinguishing Media: Use extinguishing media appropriate for surrounding fire.

5.2 Special Hazards Arising from the Substance or Mixture: Product is not flammable, combustible or explosive.

5.3 Advice for Fire-Fighters: None required.

Section 6: Accidental Release Measures

6.1 Personal Precautions, Protective Equipment and Emergency Procedures: Wear appropriate protective clothing and respiratory protection. Avoid generating airborne dust during clean-up.

6.2 Environmental Precautions: No specific precautions. Report releases to regulatory authorities as required by local, state and federal regulations.

6.3 Methods and Material for Containment and Cleaning Up: Avoid dry sweeping. Do not use compressed air to clean spilled sand or ground silica. Use water spraying/flushing or ventilated or HEPA filtered vacuum cleaning system, or wet before sweeping. Dispose of in closed containers.

6.4 Reference to Other Sections:

Refer to Section 13 for disposal information and Section 8 for protective equipment.

Section 7: Handling and Storage

7.1 Precautions for Safe Handling: Do not generate dust. Do not breathe dust. Do not rely on your sight to determine if dust is in the air. Respirable crystalline silica dust may be in the air without a visible dust cloud. Use adequate exhaust ventilation and dust collection. Maintain and test ventilation and dust collection to reduce respirable crystalline silica dust levels to below the occupational exposure limit. Use all available work practices to control dust exposures, such as water sprays. Practice good housekeeping. Do not permit dust to collect on walls, floors, sills, ledges, machinery, or equipment. Keep airborne dust concentrations below permissible exposure limits.

Where necessary to reduce exposures below the applicable exposure limit, wear a respirator approved for silica containing dust when using, handling, storing or disposing of this product or bag. See Section 8, for further information on respirators. Do not alter the respirator. Do not wear a tight-fitting respirator with facial hair such as a beard or mustache that prevents a good face to face piece seal between the respirator and face. Maintain, clean, and fit test respirators in accordance with applicable standards. Wash or vacuum clothing that has become dusty.

Participate in training, exposure monitoring, and health surveillance programs to monitor any potential adverse health effects that may be caused by breathing respirable crystalline silica. All applicable national and local worker or community "right-to-know" laws and regulations should be strictly followed.

7.2 Conditions for Safe Storage, Including any Incompatibilities: Use dust collection to trap dust produced during loading and unloading. Keep containers closed and store bags to avoid accidental tearing, breaking, or bursting.

7.3 Specific end use(s):

Industrial uses: Various commercial and industrial applications.

Professional uses: Various commercial and industrial applications.

Section 8: Exposure Controls / Personal Protection

8.1 Control Parameters:

Chemical Name	ACGIH TLV	EU IOEL	UK OEL	DFG MK	France
Crystalline Silica (quartz)	0.025 mg/m ³ TWA (respirable dust)	None Established	0.1 mg/m ³ TWA (respirable)	None Established	0.1 mg/m ³ TWA (respirable)

			fraction)		
--	--	--	-----------	--	--

Where not listed above, refer to local regulations for applicable exposure limits

DNEL: None established

PNEC: None established

If crystalline silica (quartz) is heated to more than 870°C, quartz can change to a form of crystalline silica known as tridymite; if crystalline silica (quartz) is heated to more than 1470°C, quartz can change to a form of crystalline silica known as cristobalite. In some countries, the exposure limits for crystalline silica as tridymite or cristobalite is different than the exposure limit for crystalline silica (quartz).

8.2 Exposure Controls:

Recommended Monitoring Procedures: Collection on filters and analysis by x-ray diffraction. Size selective sampling is recommended.

Appropriate engineering controls: Use adequate general or local exhaust ventilation to maintain concentrations in the workplace below the applicable exposure limits listed above.

Personal Protective Measurers

Respiratory Protection: If it is not possible to reduce airborne exposure levels to below the applicable limit with ventilation, follow local regulations to assist you in selecting respirators that will reduce personal exposures to below the limits. Refer to EN 529 or member state-specific guidance on use and selection of respiratory protection.

Eye Protection: Safety glasses with side shields or goggles recommended if eye contact is anticipated (EN 166)

Skin Protection: Maintain good industrial hygiene. Protection recommended for workers suffering from dermatitis or sensitive skin.

Other Protection: None known.

Section 9: Physical and Chemical Properties

9.1 Information on basic Physical and Chemical Properties

Appearance and Odor: White or tan sand: granular, crushed or ground to a powder.

Solubility in Water:	Insoluble	Boiling Point:	4046°F/2230°C
Odor Threshold:	Not determined	Partition Coefficient:	Not applicable
pH:	6-8	Melting Point:	3110°F/1710°C
Specific Gravity:	2.65	Vapor Density:	Not applicable
Evaporation Rate:	Not applicable	Vapor Pressure:	Not applicable
Flammability(solid/gases):	Not applicable	Flash Point:	Not applicable
Explosive Limits:	Not applicable	Autoignition Temperature:	Not determined
Decomposition	Not determined	Viscosity:	Not applicable

Temperature:			
Explosive Properties:	Not applicable	Oxidizing Properties:	Not applicable

9.2 Other Information: None

Section 10: Stability and Reactivity

10.1 Reactivity: Not reactive under normal conditions of use.

10.2 Chemical Stability: Stable.

10.3 Possibility of Hazardous Reactions: Contact with powerful oxidizing agents, such as fluorine, chlorine trifluoride and oxygen difluoride, may cause fires.

10.4 Conditions to Avoid: Avoid generation of dust in handling and use.

10.5 Incompatible Materials: Powerful oxidizers such as fluorine, chlorine trifluoride, and oxygen difluoride and hydrofluoric acid.

10.6 Hazardous Decomposition Products: Silica will dissolve in hydrofluoric acid and produce a corrosive gas, silicon tetrafluoride.

Section 11: Toxicological Information

11.1 Information on Toxicological Effects:

Acute effects of exposure:

Inhalation: Inhalation of dust may cause respiratory tract irritation. Symptoms of exposure may include cough, sore throat, nasal congestion, sneezing, wheezing and shortness of breath.

Ingestion: Ingestion in an unlikely route of exposure. If dust is swallowed, it may irritate the mouth and throat.

Skin contact: No adverse effects are expected.

Eye contact: Particulates may cause abrasive injury.

Chronic effects: Prolonged inhalation of respirable crystalline silica may cause lung disease, silicosis, lung cancer and other effects as indicated below.

The method of exposure that can lead to the adverse health effects described below is inhalation.

A. SILICOSIS

The major concern is silicosis, caused by the inhalation of respirable crystalline silica dust. Silicosis can exist in several forms, chronic (or ordinary), accelerated, or acute.

Chronic or Ordinary Silicosis is the most common form of silicosis, and can occur after many years (10 to 20 or more) of prolonged repeated inhalation of relatively low levels of airborne respirable crystalline silica dust. It is further defined as either simple or complicated silicosis. Simple silicosis is characterized by lung lesions (shown as radiographic opacities) less than 1 centimeter in diameter, primarily in the upper lung zones. Often, simple silicosis is not associated with symptoms, detectable changes in lung function or disability. Simple silicosis may be progressive and may develop into complicated silicosis or progressive massive fibrosis (PMF). Complicated silicosis or PMF is characterized by lung lesions (shown as

radiographic opacities) greater than 1 centimeter in diameter. Complicated silicosis or PMF symptoms, if present, are shortness of breath and cough. Complicated silicosis or PMF may be associated with decreased lung function and may be disabling. Advanced complicated silicosis or PMF may lead to death. Advanced complicated silicosis or PMF can result in heart disease secondary to the lung disease (cor pulmonale).

Accelerated Silicosis can occur with prolonged repeated inhalation of high concentrations of respirable crystalline silica over a relatively short period; the lung lesions can appear within five (5) years of initial exposure. Progression can be rapid. Accelerated silicosis is similar to chronic or ordinary silicosis, except that lung lesions appear earlier and progression is more rapid.

Acute Silicosis can occur after the repeated inhalation of very high concentrations of respirable crystalline silica over a short time period, sometimes as short as a few months. The symptoms of acute silicosis include progressive shortness of breath, fever, cough, weakness and weight loss. Acute silicosis is fatal.

B. CANCER

IARC - The International Agency for Research on Cancer ("IARC") concluded that "crystalline silica in the form of quartz or cristobalite dust is *carcinogenic to humans (Group 1)*". For further information on the IARC evaluation, see IARC Monographs on the Evaluation of Carcinogenic Risks to Humans, Volume 100C, "A Review of Human Carcinogens: Arsenic, Metals, Fibres and Dusts " (2011).

C. AUTOIMMUNE DISEASES

Several studies have reported excess cases of several autoimmune disorders, -- scleroderma, systemic lupus erythematosus, rheumatoid arthritis -- among silica-exposed workers.

D. TUBERCULOSIS

Individuals with silicosis are at increased risk to develop pulmonary tuberculosis, if exposed to tuberculosis bacteria. Individuals with chronic silicosis have a three-fold higher risk of contracting tuberculosis than similar individuals without silicosis.

E. KIDNEY DISEASE

Several studies have reported excess cases of kidney diseases, including end stage renal disease, among silica-exposed workers. For additional information on the subject, the following may be consulted: "Kidney Disease and Silicosis", *Nephron*, Volume 85, pp. 14-19 (2000).

F. NON-MALIGNANT RESPIRATORY DISEASES

The reader is referred to Section 3.5 of the NIOSH Special Hazard Review cited below for information concerning the association between exposure to crystalline silica and chronic bronchitis, emphysema and small airways disease. There are studies that disclose an association between dusts found in various mining occupations and non-malignant respiratory diseases, particularly among smokers. It is unclear whether the observed associations exist only with underlying silicosis, only among smokers, or result from exposure to mineral dusts generally (independent of the presence or absence of crystalline silica, or the level of crystalline silica in the dust).

Sources of information:

The *NIOSH Hazard Review - Occupational Effects of Occupational Exposure to Respirable Crystalline Silica* published in April 2002 summarizes and discusses the medical and epidemiological literature on the health risks and diseases associated with occupational exposures to respirable crystalline silica. The *NIOSH Hazard Review* is available from NIOSH - Publications Dissemination, 4676 Columbia

Parkway, Cincinnati, OH 45226, or through the NIOSH web site, www.cdc.gov/niosh/topics/silica, then click on the link “NIOSH Hazard Review: Health Effects of Occupational Exposure to Respirable Crystalline Silica”.

For a more recent review of the health effects of respirable crystalline silica, the reader may consult *Fishman's Pulmonary Diseases and Disorders*, Fourth Edition, Chapter 57. “Coal Workers' Lung Diseases and Silicosis”.

Acute Toxicity Values:

Crystalline Silica (quartz): LD50 oral rat >22,500 mg/kg

Skin corrosion/irritation: Does not meet the criteria for classification.

Eye damage/ irritation: Does not meet the criteria for classification.

Respiratory Irritation: Does not meet the criteria for classification.

Skin Sensitization: Does not meet the criteria for classification.

Respiratory Sensitization: Does not meet the criteria for classification.

Germ Cell Mutagenicity: Does not meet the criteria for classification.

Carcinogenicity: See above under CANCER.

Developmental / Reproductive Toxicity: No specific data is available, however, there is no evidence that silica exposure has any effect on reproduction.

Specific Target Organ Toxicity (Single Exposure): Does not meet the criteria for classification.

Specific Target Organ Toxicity (Repeated Exposure): See above.

Aspiration Toxicity: Not an aspiration hazard.

Section 12: Ecological Information

12.1 Toxicity: Crystalline silica (quartz) is not known to be ecotoxic.

12.2 Persistence and degradability: Silica is not degradable.

12.3 Bioaccumulative Potential: Silica is not bioaccumulative.

12.4 Mobility in Soil: Silica is not mobile in soil.

12.5 Results of PBT and vPvB Assessment: None required.

12.6 Other Adverse Effects: No data available.

Section 13: Disposal Considerations

13.1 Waste Treatment Methods:

Dispose in accordance with all applicable local, state/provincial and national/ federal regulations in light of the contamination present. Local regulations may be more stringent than regional and national requirements. It is the responsibility of the waste generator to determine the toxicity and physical characteristics of the material to determine the proper waste identification and disposal in compliance with applicable regulations.

Section 14: Transport Information

	14.1 UN Number	14.2 UN Proper Shipping Name	14.3 Hazard Class(s)	14.4 Packing Group	14.5 Environmental Hazards
US DOT	None	Not Regulated	None	None	
CANADIAN TDG	None	Not Regulated	None	None	
EU ADR/RID	None	Not Regulated	None	None	
IMDG	None	Not Regulated	None	None	
IATA/ICAO	None	Not Regulated	None	None	

14.6 Special Precautions for User: None identified

14.7 Transport in Bulk According to Annex III MARPOL 73/78 and the IBC Code: Not applicable.
Transported in packaged form only.

Section 15: Regulatory Information

15.1 Safety, Health and Environmental Regulations/Legislation Specific for the Substance or Mixture

INTERNATIONAL INVENTORIES

US EPA TSCA Inventory: All of the components of this product are listed on the EPA TSCA inventory.

Canadian Domestic Substances List: U. S. Silica Company products, as naturally occurring substances, are on the Canadian DSL.

Australian Inventory of Chemical Substances (AICS): All of the components of this product are listed on the AICS inventory or exempt from notification requirements.

China: Silica is listed on the IECSC inventory or exempt from notification requirements.

Korea Existing Chemicals Inventory (KECI) (set up under the Toxic Chemical Control Law):
Listed on the ECL with registry number 9212-5667.

Japan Ministry of International Trade and Industry (MITI): All of the components of this product are existing chemical substances as defined in the Chemical Substance Control Law Registry

Number 1-548.

New Zealand: Silica is listed on the HSNO inventory or exempt from notification requirements.

Philippines Inventory of Chemicals and Chemical Substances (PICCS): Listed for PICCS.

Taiwan: Silica is listed on the CSNN inventory or exempt from notification requirements.

Section 16: Other Information

GHS Classes and Hazard Statements for Reference (See Sections 3):

STOT-RE Cat 1 - Specific Target Organ Toxicity (Repeated Exposure) Category 1
H372 Causes damage to lungs through prolonged or repeated exposure by inhalation

Effective Date: 1 May 2017

Supersedes Date: 23 July 2014

U. S. Silica Company Disclaimer

The information and recommendations contained herein are based upon data believed to be up to-date and correct. However, no guarantee or warranty of any kind, express or implied, is made with respect to the information contained herein. We accept no responsibility and disclaim all liability for any harmful effects that may be caused by purchase, resale, use or exposure to our silica. Customers and users of silica must comply with all applicable health and safety laws, regulations, and orders. In particular, they are under an obligation to carry out a risk assessment for the particular work places and to take adequate risk management measures in accordance with the national implementation legislation of EU Directives 89/391 and 98/24.

Attachment B

Field Forms


This page intentionally left blank

BORING/WELL LOG				Client		HOLE NUMBER AND PERMIT NUMBER			
1. COMPANY NAME EA Engineering, Science, and Technology, Inc.				2. DRILL SUBCONTRACTOR			SHEET SHEETS 1 OF		
3. PROJECT		4. GEOLOGIST		5. COMPONENT		6. AREA		7. GRID LOC./BIASED POINT	
8. NAME OF DRILLER				9. MANUFACTURER'S DESIGNATION OF DRILL					
10. SIZES AND TYPES OF DRILLING AND SAMPLING EQUIPMENT TYPE OF LINER USED, IF APPLICABLE				11. SURFACE ELEVATION AND CONDITIONS					
12. DIRECT READING PARAMETERS: PID (ppm)				13. DATE STARTED			14. DATE COMPLETED		
15. OVERBURDEN THICKNESS				16. DEPTH GROUNDWATER ENCOUNTERED					
17. DEPTH DRILLED INTO ROCK				18. DEPTH TO WATER AND ELAPSED TIME ATFER DRILLING COMPLETED					
19. TOTAL DEPTH OF HOLE				20. OTHER WATER LEVEL MEASUREMENTS (SPECIFY)					
21. WELL INSTALLED?		IF SO COMPLETE CONSTRUCTION DIAGRAM		22. SAMPLE TYPE:					
23. SAMPLE INTERVAL AND DESIGNATION FOR LAB ANALYSIS			24. SAMPLE INTERVAL AND DESIGNATION FOR FIELD SCREENING ANALYSIS COD (if applicable)= Hexavalent Chromium (if applicable)=			25. SCREENING ANALYSIS COD= Heavalent Chromium=			
26. DISPOSITION OF HOLE				27. IF NOT A WELL, BACKFILLED WITH:					
USCS LOG	DEPTH (FT)	DESCRIPTION OF MATERIALS	DIRECT READING		ANALYTICAL SAMPLE DESIGNATION AND INTERVAL	DEPTH (FT)	RECOVERY (IN.)	REMARKS	
			VOC (ppm)						

PROJECT NUMBER:				HOLE NO.:					

BORING/WELL LOG (CONTINUATION SHEET)				Client		HOLE NUMBER AND PERMIT NUMBER			
1. COMPANY NAME EA Engineering, Science, and Technology, Inc.				2. DRILL SUBCONTRACTOR				SHEET SHEETS OF	
3. PROJECT		4. GEOLOGIST		5. COMPONENT		6. AREA		7. GRID LOC./BIASED POINT	
USCS LOG	DEPTH (FT)	DESCRIPTION OF MATERIALS	DIRECT READING		ANALYTICAL SAMPLE DESIGNATION AND INTERVAL	DEPTH (FT)	RECOVERY (IN.)	REMARKS	
			VOC (ppm)						

PROJECT NUMBER:			HOLE NO.:						

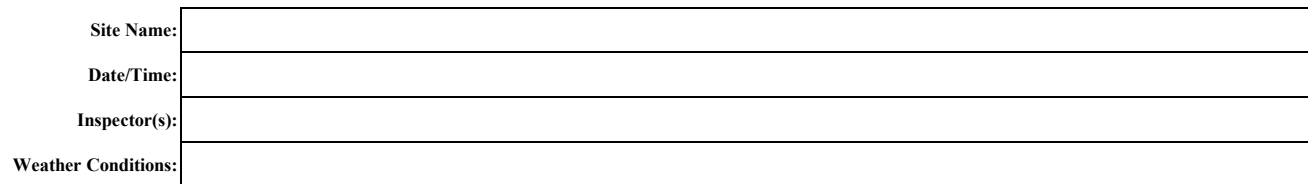[illegible][illegible]

INVESTIGATIVE DERIVED WASTE INVENTORY SHEET

[illegible]

(a) Purge water, decontamination fluids

NOTES: ID = Identification

IDW = Investigative Derived Waste

GROUNDWATER SAMPLING PURGE FORM

Well I.D.:	EA Personnel:	Client:
Location:	Well Condition:	Weather:
Sounding Method:	Gauge Date:	Measurement Ref:
Stick Up/Down (ft):	Gauge Time:	Well Diameter (in):

Purge Date:	Purge Time:
Purge Method:	Field Technician:

Well Volume

A. Well Depth (ft):	D. Well Volume (ft):	Depth/Height of Top of PVC:
B. Depth to Water (ft):	E. Well Volume (gal) C*D):	Pump Type:
C. Liquid Depth (ft) (A-B):	F. Three Well Volumes (gal) (E3):	Pump Intake Depth:

Water Quality Parameters

[illegible]

Total Quantity of Water Removed (gal): _____		Sampling Time: _____	
Samplers: _____		Split Sample With: _____	
Sampling Date: _____		Sample Type: _____	

COMMENTS AND OBSERVATIONS:	

FIELD CALIBRATION FORM

Site Name

INSTRUMENT:	INSTRUMENT ID No:
OPERATOR:	WEATHER:
SPAN GAS TYPE:	DATE:
CALIBRATION NOTES:	
COMMENTS:	
SIGNATURE:	DATE:

FIELD SOIL VAPOR SAMPLING FORM

[illegible]

FIELD CALIBRATION FORM
Horiba U-52
pH, CONDUCTIVITY, AND TURBIDITY

CALIBRATION
DATE:
TIME:
METER ID:

pH CALIBRATION

pH STANDARD	INITIAL READING	FINAL READING
4.0		

CONDUCTIVITY CALIBRATION

CONDUCTIVITY STANDARD	STANDARD READING	FINAL READING
4.49		

TURBIDITY CALIBRATION

STANDARD	INITIAL READING	FINAL READING
0 NTU		

COMMENTS

SIGNATURE



SITE ENTRY AND EXIT LOG

Project/Site: _____

Project No.: _____

[illegible]

This page intentionally left blank

Attachment C

PFAS Sampling Guidance Document

This page intentionally left blank



Department of
Environmental
Conservation

SAMPLING, ANALYSIS, AND ASSESSMENT OF PER- AND POLYFLUOROALKYL SUBSTANCES (PFAS)

Under NYSDEC's Part 375 Remedial Programs

April 2023



Table of Contents

Objective	1
Applicability	1
Field Sampling Procedures.....	1
Analysis and Reporting.....	2
Routine Analysis	2
Additional Analysis	2
Data Assessment and Application to Site Cleanup	3
Water Sample Results	3
Soil Sample Results	3
Testing for Imported Soil.....	4
Appendix A - Quality Assurance Project Plan (QAPP) Guidelines for PFAS	5
Appendix B - Sampling Protocols for PFAS in Soils, Sediments and Solids.....	6
Appendix C - Sampling Protocols for PFAS in Monitoring Wells	8
Appendix D - Sampling Protocols for PFAS in Surface Water.....	10
Appendix E - Sampling Protocols for PFAS in Private Water Supply Wells.....	12
Appendix F - Sampling Protocols for PFAS in Fish	14
Appendix G - PFAS Analyte List	22
Appendix H - Data Review Guidelines for Analysis of PFAS in Non-Potable Water and Solids.....	24

ERRATA SHEET for

**SAMPLING, ANALYSIS, AND ASSESSMENT OF PER- AND POLYFLUOROALKYL SUBSTANCES
(PFAS) Under NYSDEC's Part 375 Remedial Programs Issued January 17, 2020**

Citation and Page Number	Current Text	Corrected Text	Date
Title of Appendix I, page 32	Appendix H	Appendix I	2/25/2020
Document Cover, page 1	Guidelines for Sampling and Analysis of PFAS	Sampling, Analysis, and Assessment of Per- and Polyfluoroalkyl Substances (PFAS) Under NYSDEC's Part 375 Remedial Programs	9/15/2020
Data Assessment and Application to Site Cleanup Page 3	Until such time as Ambient Water Quality Standards (AWQS) and Soil Cleanup Objectives (SCOs) for PFOA and PFOS are published	Until such time as Soil Cleanup Objectives (SCOs) for PFOA and PFOS are published	3/28/2023
Water Sample Results Page 3	PFOA and PFOS should be further assessed and considered as potential contaminants of concern in groundwater or surface water if PFOA or PFOS is detected in any water sample at or above 10 ng/L (ppt) and is determined to be attributable to the site, either by a comparison of upgradient and downgradient levels, or the presence of soil source areas, as defined below.	NYSDEC has adopted ambient water quality guidance values for PFOA and PFOS. Groundwater samples should be compared to the human health criteria of 6.7 ng/l (ppt) for PFOA and 2.7 ng/l (ppt) for PFOS. These guidance values also include criteria for surface water for PFOS applicable for aquatic life, which may be applicable at some sites. Drinking water sample results should be compared to the NYS maximum contaminant level (MCL) of 10 ng/l (ppt). Analysis to determine if PFOA and PFOS concentrations are attributable to the site should include a comparison between upgradient and downgradient levels, and the presence of soil source areas, as defined below.	3/28/2023
Soil Sample Results Page 3	Soil cleanup objectives for PFOA and PFOS have been proposed in an upcoming revision to 6 NYCRR Part 375-6. Until SCOs are in effect, the following are to be used as guidance values:	NYSDEC will delay adding soil cleanup objectives for PFOA and PFOS to 6 NYCRR Part 375-6 until the PFAS rural soil background study has been completed. Until SCOs are in effect, the following are to be used as guidance values:	3/28/2023
Protection of Groundwater Page 3	PFOA (ppb) 1.1 PFOS (ppb) 3.7	PFOA (ppb) 0.8 PFOS (ppb) 1.0	3/28/2023

Citation and Page Number	Current Text	Corrected Text	Date
Footnote 2 Page 3	The movement of PFAS in the environment is being aggressively researched at this time; that research will eventually result in more accurate models for the behaviors of these chemicals. In the meantime, DEC has calculated the guidance value for the protection of groundwater using the same procedure used for all other chemicals, as described in Section 7.7 of the Technical Support Document (http://www.dec.ny.gov/docs/remediation_hudson_pdf/techsuppdoc.pdf).	The Protection of Groundwater values are based on the above referenced ambient groundwater guidance values. Details on that calculation are available in the following document, prepared for the February 2022 proposed changes to Part 375 (https://www.dec.ny.gov/docs/remediation_hudson_pdf/part375techsupport.pdf). The movement of PFAS in the environment is being aggressively researched at this time; that research will eventually result in more accurate models for the behaviors of these chemicals. In the meantime, DEC has calculated the guidance value for the protection of groundwater using the same procedure used for all other chemicals, as described in Section 7.7 of the Technical Support Document (http://www.dec.ny.gov/docs/remediation_hudson_pdf/techsuppdoc.pdf).	3/28/2023
Testing for Imported Soil Page 4	If the concentrations of PFOA and PFOS in leachate are at or above 10 ppt (the Maximum Contaminant Levels established for drinking water by the New York State Department of Health), then the soil is not acceptable.	If the concentrations of PFOA and PFOS in leachate are at or above the ambient water quality guidance values for groundwater, then the soil is not acceptable.	3/28/2023
Routine Analysis, page 9	“However, laboratories analyzing environmental samples...PFOA and PFOS in drinking water by EPA Method 537, 537.1 or ISO 25101.”	“However, laboratories analyzing environmental samples...PFOA and PFOS in drinking water by EPA Method 537, 537.1, ISO 25101, or Method 533.”	9/15/2020
Additional Analysis, page 9, new paragraph regarding soil parameters	None	“In cases where site-specific cleanup objectives for PFOA and PFOS are to be assessed, soil parameters, such as Total Organic Carbon (EPA Method 9060), soil pH (EPA Method 9045), clay content (percent), and cation exchange capacity (EPA Method 9081), should be included in the analysis to help evaluate factors affecting the leachability of PFAS in site soils.”	9/15/2020

Citation and Page Number	Current Text	Corrected Text	Date
Data Assessment and Application to Site Cleanup Page 10	Until such time as Ambient Water Quality Standards (AWQS) and Soil Cleanup Objectives (SCOs) for PFAS are published, the extent of contaminated media potentially subject to remediation should be determined on a case-by-case basis using the procedures discussed below and the criteria in DER-10. Target levels for cleanup of PFAS in other media, including biota and sediment, have not yet been established by the DEC.	Until such time as Ambient Water Quality Standards (AWQS) and Soil Cleanup Objectives (SCOs) for PFOA and PFOS are published, the extent of contaminated media potentially subject to remediation should be determined on a case-by-case basis using the procedures discussed below and the criteria in DER-10. Preliminary target levels for cleanup of PFOA and PFOS in other media, including biota and sediment, have not yet been established by the DEC.	9/15/2020
Water Sample Results Page 10	<p>PFAS should be further assessed and considered as a potential contaminant of concern in groundwater or surface water (...)</p> <p>If PFAS are identified as a contaminant of concern for a site, they should be assessed as part of the remedy selection process in accordance with Part 375 and DER-10.</p>	<p>PFOA and PFOS should be further assessed and considered as potential contaminants of concern in groundwater or surface water (...)</p> <p>If PFOA and/or PFOS are identified as contaminants of concern for a site, they should be assessed as part of the remedy selection process in accordance with Part 375 and DER-10.</p>	9/15/2020

Citation and Page Number	Current Text	Corrected Text	Date
Soil Sample Results, page 10	<p>“The extent of soil contamination for purposes of delineation and remedy selection should be determined by having certain soil samples tested by Synthetic Precipitation Leaching Procedure (SPLP) and the leachate analyzed for PFAS. Soil exhibiting SPLP results above 70 ppt for either PFOA or PFOS (individually or combined) are to be evaluated during the cleanup phase.”</p>	<p>“Soil cleanup objectives for PFOA and PFOS will be proposed in an upcoming revision to 6 NYCRR Part 375-6. Until SCOs are in effect, the following are to be used as guidance values. “</p> <p>[Interim SCO Table]</p> <p>“PFOA and PFOS results for soil are to be compared against the guidance values listed above. These guidance values are to be used in determining whether PFOA and PFOS are contaminants of concern for the site and for determining remedial action objectives and cleanup requirements. Site-specific remedial objectives for protection of groundwater can also be presented for evaluation by DEC. Development of site-specific remedial objectives for protection of groundwater will require analysis of additional soil parameters relating to leachability. These additional analyses can include any or all the parameters listed above (soil pH, cation exchange capacity, etc.) and/or use of SPLP.</p> <p>As the understanding of PFAS transport improves, DEC welcomes proposals for site-specific remedial objectives for protection of groundwater. DEC will expect that those may be dependent on additional factors including soil pH, aqueous pH, % organic carbon, % Sand/Silt/Clay, soil cations: K, Ca, Mg, Na, Fe, Al, cation exchange capacity, and anion exchange capacity. Site-specific remedial objectives should also consider the dilution attenuation factor (DAF). The NJDEP publication on DAF can be used as a reference:</p> <p>https://www.nj.gov/dep/srp/guidance/rs/daf.pdf. ”</p>	9/15/2020

Citation and Page Number	Current Text	Corrected Text	Date
Testing for Imported Soil Page 11	<p>Soil imported to a site for use in a soil cap, soil cover, or as backfill is to be tested for PFAS in general conformance with DER-10, Section 5.4(e) for the PFAS Analyte List (Appendix F) using the analytical procedures discussed below and the criteria in DER-10 associated with SVOCs.</p> <p>If PFOA or PFOS is detected in any sample at or above 1 µg/kg, then soil should be tested by SPLP and the leachate analyzed for PFAS. If the SPLP results exceed 10 ppt for either PFOA or PFOS (individually) then the source of backfill should be rejected, unless a site-specific exemption is provided by DER. SPLP leachate criteria is based on the Maximum Contaminant Levels proposed for drinking water by New York State's Department of Health, this value may be updated based on future Federal or State promulgated regulatory standards. Remedial parties have the option of analyzing samples concurrently for both PFAS in soil and in the SPLP leachate to minimize project delays. Category B deliverables should be submitted for backfill samples, though a DUSR is not required.</p>	<p>Testing for PFAS should be included any time a full TAL/TCL analyte list is required. Results for PFOA and PFOS should be compared to the applicable guidance values. If PFOA or PFOS is detected in any sample at or above the guidance values then the source of backfill should be rejected, unless a site-specific exemption is provided by DER based on SPLP testing, for example. If the concentrations of PFOA and PFOS in leachate are at or above 10 ppt (the Maximum Contaminant Levels established for drinking water by the New York State Department of Health), then the soil is not acceptable.</p> <p>PFOA, PFOS and 1,4-dioxane are all considered semi-volatile compounds, so composite samples are appropriate for these compounds when sampling in accordance with DER-10, Table 5.4(e)10. Category B deliverables should be submitted for backfill samples, though a DUSR is not required.</p>	9/15/2020

Citation and Page Number	Current Text	Corrected Text	Date
Footnotes	None	¹ TOP Assay analysis of highly contaminated samples, such as those from an AFFF (aqueous film-forming foam) site, can result in incomplete oxidation of the samples and an underestimation of the total perfluoroalkyl substances. ² The movement of PFAS in the environment is being aggressively researched at this time; that research will eventually result in more accurate models for the behaviors of these chemicals. In the meantime, DEC has calculated the soil cleanup objective for the protection of groundwater using the same procedure used for all other chemicals, as described in Section 7.7 of the Technical Support Document (http://www.dec.ny.gov/docs/remediation_hudson_pdf/techsuppdoc.pdf).	9/15/2020
Additional Analysis, page 9	In cases... soil parameters, such as Total Organic Carbon (EPA Method 9060), soil...	In cases... soil parameters, such as Total Organic Carbon (Lloyd Kahn), soil...	1/8/2021
Appendix A, General Guidelines, fourth bullet	List the ELAP-approved lab(s) to be used for analysis of samples	List the ELAP- certified lab(s) to be used for analysis of samples	1/8/2021
Appendix E, Laboratory Analysis and Containers	Drinking water samples collected using this protocol are intended to be analyzed for PFAS by ISO Method 25101.	Drinking water samples collected using this protocol are intended to be analyzed for PFAS by EPA Method 537, 537.1, 533, or ISO Method 25101	1/8/2021
Water Sample Results Page 9	<p>“In addition, further assessment of water may be warranted if either of the following screening levels are met:</p> <p>a. any other individual PFAS (not PFOA or PFOS) is detected in water at or above 100 ng/L; or</p> <p>b. total concentration of PFAS (including PFOA and PFOS) is detected in water at or above 500 ng/L”</p>	Deleted	6/15/2021

Citation and Page Number	Current Text	Corrected Text	Date
Routine Analysis, Page XX	Currently, New York State Department of Health's Environmental Laboratory Approval Program (ELAP)... criteria set forth in the DER's laboratory guidelines for PFAS in non-potable water and solids (Appendix H - Laboratory Guidelines for Analysis of PFAS in Non-Potable Water and Solids).	Deleted	5/31/2022
Analysis and Reporting, Page XX	As of October 2020, the United States Environmental Protection Agency (EPA) does not have a validated method for analysis of PFAS for media commonly analyzed under DER remedial programs (non-potable waters, solids). DER has developed the following guidelines to ensure consistency in analysis and reporting of PFAS.	Deleted	5/31/2022
Routine Analysis, Page XX	LC-MS/MS analysis for PFAS using methodologies based on EPA Method 537.1 is the procedure to use for environmental samples. Isotope dilution techniques should be utilized for the analysis of PFAS in all media.	EPA Method 1633 is the procedure to use for environmental samples.	
Soil Sample Results, Page XX	Soil cleanup objectives for PFOA and PFOS will be proposed in an upcoming revision to 6 NYCRR Part 375-6	Soil cleanup objectives for PFOA and PFOS have been proposed in an upcoming revision to 6 NYCRR Part 375-6	
Appendix A	"Include in the text... LC-MS/MS for PFAS using methodologies based on EPA Method 537.1"	"Include in the textEPA Method 1633"	
Appendix A	"Laboratory should have ELAP certification for PFOA and PFOS in drinking water by EPA Method 537, 537.1, EPA Method 533, or ISO 25101"	Deleted	
Appendix B	"Samples collected using this protocol are intended to be analyzed for PFAS using methodologies based on EPA Method 537.1"	"Samples collected using this protocol are intended to be analyzed for PFAS using EPA Method 1633"	

Citation and Page Number	Current Text	Corrected Text	Date
Appendix C	“Samples collected using this protocol are intended to be analyzed for PFAS using methodologies based on EPA Method 537.1”	“Samples collected using this protocol are intended to be analyzed for PFAS using EPA Method 1633”	
Appendix D	“Samples collected using this protocol are intended to be analyzed for PFAS using methodologies based on EPA Method 537.1”	“Samples collected using this protocol are intended to be analyzed for PFAS using EPA Method 1633”	
Appendix G		Updated to include all forty PFAS analytes in EPA Method 533	
Appendix H		Deleted	
Appendix I	Appendix I	Appendix H	
Appendix H	“These guidelines are intended to be used for the validation of PFAS analytical results for projects within the Division of Environmental Remediation (DER) as well as aid in the preparation of a data usability summary report.”	“These guidelines are intended to be used for the validation of PFAS using EPA Method 1633 for projects within the Division of Environmental Remediation (DER).”	
Appendix H	“The holding time is 14 days...”	“The holding time is 28 days...”	
Appendix H, Initial Calibration	“The initial calibration should contain a minimum of five standards for linear fit...”	“The initial calibration should contain a minimum of six standards for linear fit...”	
Appendix H, Initial Calibration	Linear fit calibration curves should have an R ² value greater than 0.990.	Deleted	
Appendix H, Initial Calibration Verification	Initial Calibration Verification Section	Deleted	
Appendix H	secondary Ion Monitoring Section	Deleted	
Appendix H	Branched and Linear Isomers Section	Deleted	

Sampling, Analysis, and Assessment of Per- and Polyfluoroalkyl Substances (PFAS) Under NYSDEC's Part 375 Remedial Programs

Objective

New York State Department of Environmental Conservation's Division of Environmental Remediation (DER) performs or oversees sampling of environmental media and subsequent analysis of PFAS as part of remedial programs implemented under 6 NYCRR Part 375. To ensure consistency in sampling, analysis, reporting, and assessment of PFAS, DER has developed this document which summarizes currently accepted procedures and updates previous DER technical guidance pertaining to PFAS.

Applicability

All work plans submitted to DEC pursuant to one of the remedial programs under Part 375 shall include PFAS sampling and analysis procedures that conform to the guidelines provided herein.

As part of a site investigation or remedial action compliance program, whenever samples of potentially affected media are collected and analyzed for the standard Target Analyte List/Target Compound List (TAL/TCL), PFAS analysis should also be performed. Potentially affected media can include soil, groundwater, surface water, and sediment. Based upon the potential for biota to be affected, biota sampling and analysis for PFAS may also be warranted as determined pursuant to a Fish and Wildlife Impact Analysis. Soil vapor sampling for PFAS is not required.

Field Sampling Procedures

DER-10 specifies technical guidance applicable to DER's remedial programs. Given the prevalence and use of PFAS, DER has developed "best management practices" specific to sampling for PFAS. As specified in DER-10 Chapter 2, quality assurance procedures are to be submitted with investigation work plans. Typically, these procedures are incorporated into a work plan, or submitted as a stand-alone document (e.g., a Quality Assurance Project Plan). Quality assurance guidelines for PFAS are listed in Appendix A - Quality Assurance Project Plan (QAPP) Guidelines for PFAS.

Field sampling for PFAS performed under DER remedial programs should follow the appropriate procedures outlined for soils, sediments, or other solids (Appendix B), non-potable groundwater (Appendix C), surface water (Appendix D), public or private water supply wells (Appendix E), and fish tissue (Appendix F).

QA/QC samples (e.g. duplicates, MS/MSD) should be collected as specified in DER-10, Section 2.3(c). For sampling equipment coming in contact with aqueous samples only, rinsate or equipment blanks should be collected. Equipment blanks should be collected at a minimum frequency of one per day per site or one per twenty samples, whichever is more frequent.

Analysis and Reporting

The investigation work plan should describe analysis and reporting procedures, including laboratory analytical procedures for the methods discussed below. As specified in DER-10 Section 2.2, laboratories should provide a full Category B deliverable. In addition, a Data Usability Summary Report (DUSR) should be prepared by an independent, third-party data validator. Electronic data submissions should meet the requirements provided at: <https://www.dec.ny.gov/chemical/62440.html>.

DER has developed a *PFAS Analyte List* (Appendix G) for remedial programs to understand the nature of contamination at sites. It is expected that reported results for PFAS will include, at a minimum, all the compounds listed. If lab and/or matrix specific issues are encountered for any analytes, the DER project manager, in consultation with the DER chemist, will make case-by-case decisions as to whether certain analytes may be temporarily or permanently discontinued from analysis at each site. As with other contaminants that are analyzed for at a site, the *PFAS Analyte List* may be refined for future sampling events based on investigative findings.

Routine Analysis

EPA Method 1633 is the procedure to use for environmental samples. Reporting limits for PFOA and PFOS in aqueous samples should not exceed 2 ng/L. Reporting limits for PFOA and PFOS in solid samples should not exceed 0.5 µg/kg. Reporting limits for all other PFAS in aqueous and solid media should be as close to these limits as possible. If laboratories indicate that they are not able to achieve these reporting limits for the entire *PFAS Analyte List*, site-specific decisions regarding acceptance of elevated reporting limits for specific PFAS can be made by the DER project manager in consultation with the DER chemist. Data review guidelines were developed by DER to ensure data comparability and usability (Appendix H - Data Review Guidelines for Analysis of PFAS in Non-Potable Water and Solids).

Additional Analysis

Additional laboratory methods for analysis of PFAS may be warranted at a site, such as the Synthetic Precipitation Leaching Procedure (SPLP) and Total Oxidizable Precursor Assay (TOP Assay).

In cases where site-specific cleanup objectives for PFOA and PFOS are to be assessed, soil parameters, such as Total Organic Carbon (Lloyd Kahn), soil pH (EPA Method 9045), clay content (percent), and cation exchange capacity (EPA Method 9081), should be included in the analysis to help evaluate factors affecting the leachability of PFAS in site soils.

SPLP is a technique used to determine the mobility of chemicals in liquids, soils and wastes, and may be useful in determining the need for addressing PFAS-containing material as part of the remedy. SPLP by EPA Method 1312 should be used unless otherwise specified by the DER project manager in consultation with the DER chemist.

Impacted materials can be made up of PFAS that are not analyzable by routine analytical methodology. A TOP Assay can be utilized to conceptualize the amount and type of oxidizable PFAS which could be liberated in the environment, which approximates the maximum concentration of perfluoroalkyl substances that could be generated if all polyfluoroalkyl substances were oxidized. For example, some polyfluoroalkyl substances may degrade or transform to form perfluoroalkyl substances (such as PFOA or PFOS), resulting in an increase in perfluoroalkyl substance concentrations as contaminated groundwater moves away from a source. The TOP Assay converts, through oxidation, polyfluoroalkyl substances (precursors) into perfluoroalkyl substances that can be detected by routine analytical methodology.¹

¹ TOP Assay analysis of highly contaminated samples, such as those from an AFFF (aqueous film-forming foam) site, can result in incomplete oxidation of the samples and an underestimation of the total perfluoroalkyl substances.

Commercial laboratories have adopted methods which allow for the quantification of targeted PFAS in air and biota. The EPA's Office of Research and Development (ORD) is currently developing methods which allow for air emissions characterization of PFAS, including both targeted and non-targeted analysis of PFAS. Consult with the DER project manager and the DER chemist for assistance on analyzing biota/tissue and air samples.

Data Assessment and Application to Site Cleanup

Until such time as Soil Cleanup Objectives (SCOs) for PFOA and PFOS are published, the extent of contaminated media potentially subject to remediation should be determined on a case-by-case basis using the procedures discussed below and the criteria in DER-10. Preliminary target levels for cleanup of PFOA and PFOS in other media, including biota and sediment, have not yet been established by the DEC.

Water Sample Results

NYSDEC has adopted ambient water quality guidance values for PFOA and PFOS. Groundwater samples should be compared to the human health criteria of 6.7 ng/l (ppt) for PFOA and 2.7 ng/l (ppt) for PFOS. These human health criteria should also be applied to surface water that is used as a water supply. This guidance also includes criteria for surface water for PFOS applicable for aquatic life, which may be applicable at some sites. Drinking water sample results should be compared to the NYS maximum contaminant level (MCL) of 10 ng/l (ppt). Analysis to determine if PFOA and PFOS concentrations are attributable to the site should include a comparison between upgradient and downgradient levels, and the presence of soil source areas, as defined below.

If PFOA and/or PFOS are identified as contaminants of concern for a site, they should be assessed as part of the remedy selection process in accordance with Part 375 and DER-10.

Soil Sample Results

NYSDEC will delay adding soil cleanup objectives for PFOA and PFOS to 6 NYCRR Part 375-6 until the PFAS rural soil background study has been completed. Until SCOs are in effect, the following are to be used as guidance values:

Guidance Values for Anticipated Site Use	PFOA (ppb)	PFOS (ppb)
Unrestricted	0.66	0.88
Residential	6.6	8.8
Restricted Residential	33	44
Commercial	500	440
Industrial	600	440
Protection of Groundwater ²	0.8	1.0

PFOA and PFOS results for soil are to be compared against the guidance values listed above. These guidance values are to be used in determining whether PFOA and PFOS are contaminants of concern for the site and for determining remedial action objectives and cleanup requirements. Site-specific remedial objectives for protection of groundwater can also be presented for evaluation by DEC. Development of site-specific remedial objectives for protection of groundwater will require analysis of additional soil parameters relating to leachability. These

² The Protection of Groundwater values are based on the above referenced ambient groundwater guidance values. Details on that calculation are available in the following document, prepared for the February 2022 proposed changes to Part 375 (https://www.dec.ny.gov/docs/remediation_hudson_pdf/part375techsupport.pdf). The movement of PFAS in the environment is being aggressively researched at this time; that research will eventually result in more accurate models for the behaviors of these chemicals. In the meantime, DEC has calculated the guidance value for the protection of groundwater using the same procedure used for all other chemicals, as described in Section 7.7 of the Technical Support Document (http://www.dec.ny.gov/docs/remediation_hudson_pdf/techsuppdoc.pdf).

additional analyses can include any or all the parameters listed above (soil pH, cation exchange capacity, etc.) and/or use of SPLP.

As the understanding of PFAS transport improves, DEC welcomes proposals for site-specific remedial objectives for protection of groundwater. DEC will expect that those may be dependent on additional factors including soil pH, aqueous pH, % organic carbon, % Sand/Silt/Clay, soil cations: K, Ca, Mg, Na, Fe, Al, cation exchange capacity, and anion exchange capacity. Site-specific remedial objectives should also consider the dilution attenuation factor (DAF). The NJDEP publication on DAF can be used as a reference:

<https://www.nj.gov/dep/srp/guidance/rs/daf.pdf>.

Testing for Imported Soil

Testing for PFAS should be included any time a full TAL/TCL analyte list is required. Results for PFOA and PFOS should be compared to the applicable guidance values. If PFOA or PFOS is detected in any sample at or above the guidance values then the source of backfill should be rejected, unless a site-specific exemption is provided by DER based on SPLP testing, for example. If the concentrations of PFOA and PFOS in leachate are at or above the ambient water quality guidance values for groundwater, then the soil is not acceptable.

PFOA, PFOS and 1,4-dioxane are all considered semi-volatile compounds, so composite samples are appropriate for these compounds when sampling in accordance with DER-10, Table 5.4(e)10. Category B deliverables should be submitted for backfill samples, though a DUSR is not required.

Appendix A - Quality Assurance Project Plan (QAPP) Guidelines for PFAS

The following guidelines (general and PFAS-specific) can be used to assist with the development of a QAPP for projects within DER involving sampling and analysis of PFAS.

General Guidelines in Accordance with DER-10

- Document/work plan section title – Quality Assurance Project Plan
- Summarize project scope, goals, and objectives
- Provide project organization including names and resumes of the project manager, Quality Assurance Officer (QAO), field staff, and Data Validator
 - The QAO should not have another position on the project, such as project or task manager, that involves project productivity or profitability as a job performance criterion
- List the ELAP certified lab(s) to be used for analysis of samples
- Include a site map showing sample locations
- Provide detailed sampling procedures for each matrix
- Include Data Quality Usability Objectives
- List equipment decontamination procedures
- Include an “Analytical Methods/Quality Assurance Summary Table” specifying:
 - Matrix type
 - Number or frequency of samples to be collected per matrix
 - Number of field and trip blanks per matrix
 - Analytical parameters to be measured per matrix
 - Analytical methods to be used per matrix with minimum reporting limits
 - Number and type of matrix spike and matrix spike duplicate samples to be collected
 - Number and type of duplicate samples to be collected
 - Sample preservation to be used per analytical method and sample matrix
 - Sample container volume and type to be used per analytical method and sample matrix
 - Sample holding time to be used per analytical method and sample matrix
- Specify Category B laboratory data deliverables and preparation of a DUSR

Specific Guidelines for PFAS

- Include in the text that sampling for PFAS will take place
- Include in the text that PFAS will be analyzed by EPA Method 1633
- Include the list of PFAS compounds to be analyzed (*PFAS Analyte List*)
- Include the laboratory SOP for PFAS analysis
- List the minimum method-achievable Reporting Limits for PFAS
 - Reporting Limits should be less than or equal to:
 - Aqueous – 2 ng/L (ppt)
 - Solids – 0.5 µg/kg (ppb)
- Include the laboratory Method Detection Limits for the PFAS compounds to be analyzed
-
- Include detailed sampling procedures
 - Precautions to be taken
 - Pump and equipment types
 - Decontamination procedures
 - Approved materials only to be used
- Specify that regular ice only will be used for sample shipment
- Specify that equipment blanks should be collected at a minimum frequency of 1 per day per site for each matrix

Appendix B - Sampling Protocols for PFAS in Soils, Sediments and Solids

General

The objective of this protocol is to give general guidelines for the collection of soil, sediment and other solid samples for PFAS analysis. The sampling procedure used should be consistent with Sampling Guidelines and Protocols – Technological Background and Quality Control/Quality Assurance for NYS DEC Spill Response Program – March 1991 (http://www.dec.ny.gov/docs/remediation_hudson_pdf/sgpsect5.pdf), with the following limitations.

Laboratory Analysis and Containers

Samples collected using this protocol are intended to be analyzed for PFAS using EPA Method 1633.

The preferred material for containers is high density polyethylene (HDPE). Pre-cleaned sample containers, coolers, sample labels, and a chain of custody form will be provided by the laboratory.

Equipment

Acceptable materials for sampling include stainless steel, HDPE, PVC, silicone, acetate, and polypropylene. Additional materials may be acceptable if pre-approved by New York State Department of Environmental Conservation's Division of Environmental Remediation.

No sampling equipment components or sample containers should come in to contact with aluminum foil, low density polyethylene, glass, or polytetrafluoroethylene (PTFE, Teflon™) materials including sample bottle cap liners with a PTFE layer.

A list of acceptable equipment is provided below, but other equipment may be considered appropriate based on sampling conditions.

- stainless steel spoon
- stainless steel bowl
- steel hand auger or shovel without any coatings

Equipment Decontamination

Standard two step decontamination using detergent (Alconox is acceptable) and clean, PFAS-free water will be performed for sampling equipment. All sources of water used for equipment decontamination should be verified in advance to be PFAS-free through laboratory analysis or certification.

Sampling Techniques

Sampling is often conducted in areas where a vegetative turf has been established. In these cases, a pre-cleaned trowel or shovel should be used to carefully remove the turf so that it may be replaced at the conclusion of sampling. Surface soil samples (e.g. 0 to 6 inches below surface) should then be collected using a pre-cleaned, stainless steel spoon. Shallow subsurface soil samples (e.g. 6 to ~36 inches below surface) may be collected by digging a hole using a pre-cleaned hand auger or shovel. When the desired subsurface depth is reached, a pre-cleaned hand auger or spoon shall be used to obtain the sample.

When the sample is obtained, it should be deposited into a stainless steel bowl for mixing prior to filling the sample containers. The soil should be placed directly into the bowl and mixed thoroughly by rolling the material into the middle until the material is homogenized. At this point the material within the bowl can be placed into the laboratory provided container.

Sample Identification and Logging

A label shall be attached to each sample container with a unique identification. Each sample shall be included on the chain of custody (COC).

Quality Assurance/Quality Control

- Immediately place samples in a cooler maintained at $4 \pm 2^\circ$ Celsius using ice
- Collect one field duplicate for every sample batch, minimum 1 duplicate per 20 samples. The duplicate shall consist of an additional sample at a given location
- Collect one matrix spike / matrix spike duplicate (MS/MSD) for every sample batch, minimum 1 MS/MSD per 20 samples. The MS/MSD shall consist of an additional two samples at a given location and identified on the COC
- Request appropriate data deliverable (Category B) and an electronic data deliverable

Documentation

A soil log or sample log shall document the location of the sample/borehole, depth of the sample, sampling equipment, duplicate sample, visual description of the material, and any other observations or notes determined to be appropriate. Additionally, care should be performed to limit contact with PFAS containing materials (e.g. waterproof field books, food packaging) during the sampling process.

Personal Protection Equipment (PPE)

For most sampling Level D PPE is anticipated to be appropriate. The sampler should wear nitrile gloves while conducting field work and handling sample containers.

Field staff shall consider the clothing to be worn during sampling activities. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFAS materials should be avoided. All clothing worn by sampling personnel should have been laundered multiple times.

Appropriate rain gear (PVC, polyurethane, or rubber rain gear are acceptable), bug spray, and sunscreen should be used that does not contain PFAS. Well washed cotton coveralls may be used as an alternative to bug spray and/or sunscreen.

PPE that contains PFAS is acceptable when site conditions warrant additional protection for the samplers and no other materials can be used to be protective. Documentation of such use should be provided in the field notes.

Appendix C - Sampling Protocols for PFAS in Monitoring Wells

General

The objective of this protocol is to give general guidelines for the collection of groundwater samples for PFAS analysis. The sampling procedure used should be consistent with Sampling Guidelines and Protocols – Technological Background and Quality Control/Quality Assurance for NYS DEC Spill Response Program – March 1991 (http://www.dec.ny.gov/docs/remediation_hudson_pdf/sgpsect5.pdf), with the following limitations.

Laboratory Analysis and Container

Samples collected using this protocol are intended to be analyzed for PFAS using EPA Method 1633.

The preferred material for containers is high density polyethylene (HDPE). Pre-cleaned sample containers, coolers, sample labels, and a chain of custody form will be provided by the laboratory.

Equipment

Acceptable materials for sampling include: stainless steel, HDPE, PVC, silicone, acetate, and polypropylene. Additional materials may be acceptable if pre-approved by New York State Department of Environmental Conservation's Division of Environmental Remediation.

No sampling equipment components or sample containers should come in contact with aluminum foil, low density polyethylene, glass, or polytetrafluoroethylene (PTFE, Teflon™) materials including plumbers tape and sample bottle cap liners with a PTFE layer.

A list of acceptable equipment is provided below, but other equipment may be considered appropriate based on sampling conditions.

- stainless steel inertia pump with HDPE tubing
- peristaltic pump equipped with HDPE tubing and silicone tubing
- stainless steel bailer with stainless steel ball
- bladder pump (identified as PFAS-free) with HDPE tubing

Equipment Decontamination

Standard two step decontamination using detergent (Alconox is acceptable) and clean, PFAS-free water will be performed for sampling equipment. All sources of water used for equipment decontamination should be verified in advance to be PFAS-free through laboratory analysis or certification.

Sampling Techniques

Monitoring wells should be purged in accordance with the sampling procedure (standard/volume purge or low flow purge) identified in the site work plan, which will determine the appropriate time to collect the sample. If sampling using standard purge techniques, additional purging may be needed to reduce turbidity levels, so samples contain a limited amount of sediment within the sample containers. Sample containers that contain sediment may cause issues at the laboratory, which may result in elevated reporting limits and other issues during the sample preparation that can compromise data usability. Sampling personnel should don new nitrile gloves prior to sample collection due to the potential to contact PFAS containing items (not related to the sampling equipment) during the purging activities.

Sample Identification and Logging

A label shall be attached to each sample container with a unique identification. Each sample shall be included on the chain of custody (COC).

Quality Assurance/Quality Control

- Immediately place samples in a cooler maintained at $4 \pm 2^\circ$ Celsius using ice
- Collect one field duplicate for every sample batch, minimum 1 duplicate per 20 samples. The duplicate shall consist of an additional sample at a given location
- Collect one matrix spike / matrix spike duplicate (MS/MSD) for every sample batch, minimum 1 MS/MSD per 20 samples. The MS/MSD shall consist of an additional two samples at a given location and identified on the COC
- Collect one equipment blank per day per site and minimum 1 equipment blank per 20 samples. The equipment blank shall test the new and decontaminated sampling equipment utilized to obtain a sample for residual PFAS contamination. This sample is obtained by using laboratory provided PFAS-free water and passing the water over or through the sampling device and into laboratory provided sample containers
- Additional equipment blank samples may be collected to assess other equipment that is utilized at the monitoring well
- Request appropriate data deliverable (Category B) and an electronic data deliverable

Documentation

A purge log shall document the location of the sample, sampling equipment, groundwater parameters, duplicate sample, visual description of the material, and any other observations or notes determined to be appropriate. Additionally, care should be performed to limit contact with PFAS containing materials (e.g. waterproof field books, food packaging) during the sampling process.

Personal Protection Equipment (PPE)

For most sampling Level D PPE is anticipated to be appropriate. The sampler should wear nitrile gloves while conducting field work and handling sample containers.

Field staff shall consider the clothing to be worn during sampling activities. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFAS materials should be avoided. All clothing worn by sampling personnel should have been laundered multiple times.

Appropriate rain gear (PVC, polyurethane, or rubber rain gear are acceptable), bug spray, and sunscreen should be used that does not contain PFAS. Well washed cotton coveralls may be used as an alternative to bug spray and/or sunscreen.

PPE that contains PFAS is acceptable when site conditions warrant additional protection for the samplers and no other materials can be used to be protective. Documentation of such use should be provided in the field notes.

Appendix D - Sampling Protocols for PFAS in Surface Water

General

The objective of this protocol is to give general guidelines for the collection of surface water samples for PFAS analysis. The sampling procedure used should be consistent with Sampling Guidelines and Protocols – Technological Background and Quality Control/Quality Assurance for NYS DEC Spill Response Program – March 1991 (http://www.dec.ny.gov/docs/remediation_hudson_pdf/sgpsect5.pdf), with the following limitations.

Laboratory Analysis and Container

Samples collected using this protocol are intended to be analyzed for PFAS using EPA Method 1633.

The preferred material for containers is high density polyethylene (HDPE). Pre-cleaned sample containers, coolers, sample labels, and a chain of custody form will be provided by the laboratory.

Equipment

Acceptable materials for sampling include: stainless steel, HDPE, PVC, silicone, acetate, and polypropylene. Additional materials may be acceptable if pre-approved by New York State Department of Environmental Conservation's Division of Environmental Remediation.

No sampling equipment components or sample containers should come in contact with aluminum foil, low density polyethylene, glass, or polytetrafluoroethylene (PTFE, Teflon™) materials including sample bottle cap liners with a PTFE layer.

A list of acceptable equipment is provided below, but other equipment may be considered appropriate based on sampling conditions.

- stainless steel cup

Equipment Decontamination

Standard two step decontamination using detergent (Alconox is acceptable) and clean, PFAS-free water will be performed for sampling equipment. All sources of water used for equipment decontamination should be verified in advance to be PFAS-free through laboratory analysis or certification.

Sampling Techniques

Where conditions permit, (e.g. creek or pond) sampling devices (e.g. stainless steel cup) should be rinsed with site medium to be sampled prior to collection of the sample. At this point the sample can be collected and poured into the sample container.

If site conditions permit, samples can be collected directly into the laboratory container.

Sample Identification and Logging

A label shall be attached to each sample container with a unique identification. Each sample shall be included on the chain of custody (COC).

Quality Assurance/Quality Control

- Immediately place samples in a cooler maintained at $4 \pm 2^\circ$ Celsius using ice
- Collect one field duplicate for every sample batch, minimum 1 duplicate per 20 samples. The duplicate shall consist of an additional sample at a given location
- Collect one matrix spike / matrix spike duplicate (MS/MSD) for every sample batch, minimum 1 MS/MSD per 20 samples. The MS/MSD shall consist of an additional two samples at a given location and identified on the COC
- Collect one equipment blank per day per site and minimum 1 equipment blank per 20 samples. The equipment blank shall test the new and decontaminated sampling equipment utilized to obtain a sample for residual PFAS contamination. This sample is obtained by using laboratory provided PFAS-free water and passing the water over or through the sampling device and into laboratory provided sample containers
- Request appropriate data deliverable (Category B) and an electronic data deliverable

Documentation

A sample log shall document the location of the sample, sampling equipment, duplicate sample, visual description of the material, and any other observations or notes determined to be appropriate. Additionally, care should be performed to limit contact with PFAS containing materials (e.g. waterproof field books, food packaging) during the sampling process.

Personal Protection Equipment (PPE)

For most sampling Level D PPE is anticipated to be appropriate. The sampler should wear nitrile gloves while conducting field work and handling sample containers.

Field staff shall consider the clothing to be worn during sampling activities. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFAS materials should be avoided. All clothing worn by sampling personnel should have been laundered multiple times.

Appropriate rain gear (PVC, polyurethane, or rubber rain gear are acceptable), bug spray, and sunscreen should be used that does not contain PFAS. Well washed cotton coveralls may be used as an alternative to bug spray and/or sunscreen.

PPE that contains PFAS is acceptable when site conditions warrant additional protection for the samplers and no other materials can be used to be protective. Documentation of such use should be provided in the field notes.

Appendix E - Sampling Protocols for PFAS in Private Water Supply Wells

General

The objective of this protocol is to give general guidelines for the collection of water samples from private water supply wells (with a functioning pump) for PFAS analysis. The sampling procedure used should be consistent with Sampling Guidelines and Protocols – Technological Background and Quality Control/Quality Assurance for NYS DEC Spill Response Program – March 1991 (http://www.dec.ny.gov/docs/remediation_hudson_pdf/sgpsect5.pdf), with the following limitations.

Laboratory Analysis and Container

Drinking water samples collected using this protocol are intended to be analyzed for PFAS by EPA Method 537, 537.1, 533, or ISO Method 25101. The preferred material for containers is high density polyethylene (HDPE). Pre-cleaned sample containers, coolers, sample labels, and a chain of custody form will be provided by the laboratory.

Equipment

Acceptable materials for sampling include stainless steel, HDPE, PVC, silicone, acetate, and polypropylene. Additional materials may be acceptable if pre-approved by New York State Department of Environmental Conservation's Division of Environmental Remediation.

No sampling equipment components or sample containers should come in contact with aluminum foil, low density polyethylene, glass, or polytetrafluoroethylene (PTFE, Teflon™) materials (e.g. plumbers tape), including sample bottle cap liners with a PTFE layer.

Equipment Decontamination

Standard two step decontamination using detergent (Alconox is acceptable) and clean, PFAS-free water will be performed for sampling equipment. All sources of water used for equipment decontamination should be verified in advance to be PFAS-free through laboratory analysis or certification.

Sampling Techniques

Locate and assess the pressure tank and determine if any filter units are present within the building. Establish the sample location as close to the well pump as possible, which is typically the spigot at the pressure tank. Ensure sampling equipment is kept clean during sampling as access to the pressure tank spigot, which is likely located close to the ground, may be obstructed and may hinder sample collection.

Prior to sampling, a faucet downstream of the pressure tank (e.g., washroom sink) should be run until the well pump comes on and a decrease in water temperature is noted which indicates that the water is coming from the well. If the homeowner is amenable, staff should run the water longer to purge the well (15+ minutes) to provide a sample representative of the water in the formation rather than standing water in the well and piping system including the pressure tank. At this point a new pair of nitrile gloves should be donned and the sample can be collected from the sample point at the pressure tank.

Sample Identification and Logging

A label shall be attached to each sample container with a unique identification. Each sample shall be included on the chain of custody (COC).

Quality Assurance/Quality Control

- Immediately place samples in a cooler maintained at $4 \pm 2^\circ$ Celsius using ice
- Collect one field duplicate for every sample batch, minimum 1 duplicate per 20 samples. The duplicate shall consist of an additional sample at a given location
- Collect one matrix spike / matrix spike duplicate (MS/MSD) for every sample batch, minimum 1 MS/MSD per 20 samples. The MS/MSD shall consist of an additional two samples at a given location and identified on the COC
- If equipment was used, collect one equipment blank per day per site and a minimum 1 equipment blank per 20 samples. The equipment blank shall test the new and decontaminated sampling equipment utilized to obtain a sample for residual PFAS contamination. This sample is obtained by using laboratory provided PFAS-free water and passing the water over or through the sampling device and into laboratory provided sample containers.
- A field reagent blank (FRB) should be collected at a rate of one per 20 samples. The lab will provide a FRB bottle containing PFAS free water and one empty FRB bottle. In the field, pour the water from the one bottle into the empty FRB bottle and label appropriately.
- Request appropriate data deliverable (Category B) and an electronic data deliverable
- For sampling events where multiple private wells (homes or sites) are to be sampled per day, it is acceptable to collect QC samples at a rate of one per 20 across multiple sites or days.

Documentation

A sample log shall document the location of the private well, sample point location, owner contact information, sampling equipment, purge duration, duplicate sample, visual description of the material, and any other observations or notes determined to be appropriate and available (e.g. well construction, pump type and location, yield, installation date). Additionally, care should be performed to limit contact with PFAS containing materials (e.g. waterproof field books, food packaging) during the sampling process.

Personal Protection Equipment (PPE)

For most sampling Level D PPE is anticipated to be appropriate. The sampler should wear nitrile gloves while conducting field work and handling sample containers.

Field staff shall consider the clothing to be worn during sampling activities. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFAS materials should be avoided. All clothing worn by sampling personnel should have been laundered multiple times.

Appendix F - Sampling Protocols for PFAS in Fish

This appendix contains a copy of the current SOP developed by the Division of Fish and Wildlife (DFW) entitled “General Fish Handling Procedures for Contaminant Analysis” (Ver. 8). This SOP should be followed when collecting fish for contaminant analysis. Note, however, that the Bureau of Ecosystem Health will not be supplying bags or tags. All supplies are the responsibility of the collector

Procedure Name: General Fish Handling Procedures for Contaminant Analysis

Number: FW-005

Purpose: This procedure describes data collection, fish processing and delivery of fish collected for contaminant monitoring. It contains the chain of custody and collection record forms that should be used for the collections.

Organization: Environmental Monitoring Section
Bureau of Ecosystem Health
Division of Fish and Wildlife (DFW)
New York State Department of Environmental Conservation (NYSDEC)
625 Broadway
Albany, New York 12233-4756

Version: 8

Previous Version Date: 21 March 2018

Summary of Changes to this Version: Updated bureau name to Bureau of Ecosystem Health. Added direction to list the names of all field crew on the collection record. Minor formatting changes on chain of custody and collection records.

Originator or Revised by: Wayne Richter, Jesse Becker

Date: 26 April 2019

Quality Assurance Officer and Approval Date: Jesse Becker, 26 April 2019

**NEW YORK STATE
DEPARTMENT OF ENVIRONMENTAL CONSERVATION**

GENERAL FISH HANDLING PROCEDURES FOR CONTAMINANT ANALYSES

- A. Original copies of all continuity of evidence (i.e., Chain of Custody) and collection record forms must accompany delivery of fish to the lab. A copy shall be directed to the Project Leader or as appropriate, Wayne Richter. All necessary forms will be supplied by the Bureau of Ecosystem Health. Because some samples may be used in legal cases, it is critical that each section is filled out completely. Each Chain of Custody form has three main sections:
1. The top box is to be filled out **and signed** by the person responsible for the fish collection (e.g., crew leader, field biologist, researcher). This person is responsible for delivery of the samples to DEC facilities or personnel (e.g., regional office or biologist).
 2. The second section is to be filled out **and signed** by the person responsible for the collections while being stored at DEC, before delivery to the analytical lab. This may be the same person as in (1), but it is still required that they complete the section. Also important is the **range of identification numbers** (i.e., tag numbers) included in the sample batch.
 3. Finally, the bottom box is to record any transfers between DEC personnel and facilities. Each subsequent transfer should be **identified, signed, and dated**, until laboratory personnel take possession of the fish.
- B. The following data are required on each **Fish Collection Record** form:
1. Project and Site Name.
 2. DEC Region.
 3. All personnel (and affiliation) involved in the collection.
 4. Method of collection (gill net, hook and line, etc.)
 5. Preservation Method.
- C. The following data are to be taken on each fish collected and recorded on the **Fish Collection Record** form:
1. Tag number - Each specimen is to be individually jaw tagged at time of collection with a unique number. Make sure the tag is turned out so that the number can be read without opening the bag. Use tags in sequential order. For small fish or composite samples place the tag inside the bag with the samples. The Bureau of Ecosystem Health can supply the tags.
 2. Species identification (please be explicit enough to enable assigning genus and species). Group fish by species when processing.
 3. Date collected.
 4. Sample location (waterway and nearest prominent identifiable landmark).
 5. Total length (nearest mm or smallest sub-unit on measuring instrument) and weight (nearest g or

smallest sub-unit of weight on weighing instrument). Take all measures as soon as possible with calibrated, protected instruments (e.g. from wind and upsets) and prior to freezing.

6. Sex - fish may be cut enough to allow sexing or other internal investigation, but do not eviscerate. Make any incision on the right side of the belly flap or exactly down the midline so that a left-side fillet can be removed.

D. General data collection recommendations:

1. It is helpful to use an ID or tag number that will be unique. It is best to use metal striped bass or other uniquely numbered metal tags. If uniquely numbered tags are unavailable, values based on the region, water body and year are likely to be unique: for example, R7CAY11001 for Region 7, Cayuga Lake, 2011, fish 1. If the fish are just numbered 1 through 20, we have to give them new numbers for our database, making it more difficult to trace your fish to their analytical results and creating an additional possibility for errors.
 2. Process and record fish of the same species sequentially. Recording mistakes are less likely when all fish from a species are processed together. Starting with the bigger fish species helps avoid missing an individual.
 3. If using Bureau of Ecosystem Health supplied tags or other numbered tags, use tags in sequence so that fish are recorded with sequential Tag Numbers. This makes data entry and login at the lab and use of the data in the future easier and reduces keypunch errors.
 4. Record length and weight as soon as possible after collection and before freezing. Other data are recorded in the field upon collection. An age determination of each fish is optional, but if done, it is recorded in the appropriate "Age" column.
 5. For composite samples of small fish, record the number of fish in the composite in the Remarks column. Record the length and weight of each individual in a composite. All fish in a composite sample should be of the same species and members of a composite should be visually matched for size.
 6. Please submit photocopies of topographic maps or good quality navigation charts indicating sampling locations. GPS coordinates can be entered in the Location column of the collection record form in addition to or instead for providing a map. These records are of immense help to us (and hopefully you) in providing documented location records which are not dependent on memory and/or the same collection crew. In addition, they may be helpful for contaminant source trackdown and remediation/control efforts of the Department.
 7. When recording data on fish measurements, it will help to ensure correct data recording for the data recorder to call back the numbers to the person making the measurements.
- E. Each fish is to be placed in its own individual plastic bag. For small fish to be analyzed as a composite, put all of the fish for one composite in the same bag but use a separate bag for each composite. It is important to individually bag the fish to avoid difficulties or cross contamination when processing the fish for chemical analysis. Be sure to include the fish's tag number inside the bag, preferably attached to the fish with the tag number turned out so it can be read. Tie or otherwise secure the bag closed. **The Bureau of Ecosystem Health will supply the bags.** If necessary, food grade bags may be procured from a suitable vendor (e.g., grocery store). It is preferable to redundantly label each bag with a manila tag tied between the knot and the body of the bag. This tag should be labeled with the project name, collection location, tag number, collection date, and fish species. If scales are collected, the scale envelope should be labeled with

the same information.

- F. Groups of fish, by species, are to be placed in one large plastic bag per sampling location. **The Bureau of Ecosystem Health will supply the larger bags.** Tie or otherwise secure the bag closed. Label the site bag with a manila tag tied between the knot and the body of the bag. The tag should contain: project, collection location, collection date, species and **tag number ranges**. Having this information on the manila tag enables lab staff to know what is in the bag without opening it.
- G. Do not eviscerate, fillet or otherwise dissect the fish unless specifically asked to. If evisceration or dissection is specified, the fish must be cut along the exact midline or on the right side so that the left side fillet can be removed intact at the laboratory. If filleting is specified, the procedure for taking a standard fillet (SOP PREPLAB 4) must be followed, including removing scales.
- H. Special procedures for PFAS: Unlike legacy contaminants such as PCBs, which are rarely found in day to day life, PFAS are widely used and frequently encountered. Practices that avoid sample contamination are therefore necessary. While no standard practices have been established for fish, procedures for water quality sampling can provide guidance. The following practices should be used for collections when fish are to be analyzed for PFAS:
 - No materials containing Teflon.
 - No Post-it notes.
 - No ice packs; only water ice or dry ice.
 - Any gloves worn must be powder free nitrile.
 - No Gore-Tex or similar materials (Gore-Tex is a PFC with PFOA used in its manufacture).
 - No stain repellent or waterproof treated clothing; these are likely to contain PFCs.
 - Avoid plastic materials, other than HDPE, including clipboards and waterproof notebooks.
 - Wash hands after handling any food containers or packages as these may contain PFCs.
 - Keep pre-wrapped food containers and wrappers isolated from fish handling.
 - Wear clothing washed at least six times since purchase.
 - Wear clothing washed without fabric softener.
 - Staff should avoid cosmetics, moisturizers, hand creams and similar products on the day of sampling as many of these products contain PFCs (Fujii et al. 2013). Sunscreen or insect repellent should not contain ingredients with “fluor” in their name. Apply any sunscreen or insect repellent well downwind from all materials. Hands must be washed after touching any of these products.
- I. All fish must be kept at a temperature <45° F (<8° C) immediately following data processing. As soon as possible, freeze at -20° C ± 5° C. Due to occasional freezer failures, daily freezer temperature logs are required. The freezer should be locked or otherwise secured to maintain chain of custody.
- J. In most cases, samples should be delivered to the Analytical Services Unit at the Hale Creek field station. Coordinate delivery with field station staff and send copies of the collection records, continuity of evidence forms and freezer temperature logs to the field station. For samples to be analyzed elsewhere, non-routine collections or other questions, contact Wayne Richter, Bureau of Ecosystem Health, NYSDEC, 625 Broadway, Albany, New York 12233-4756, 518-402-8974, or the project leader about sample transfer. Samples will then be directed to the analytical facility and personnel noted on specific project descriptions.
- K. A recommended equipment list is at the end of this document.

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
DIVISION OF FISH AND WILDLIFE
FISH COLLECTION RECORD

page _____ of _____

Project and Site Name _____ DEC Region _____

Collections made by (include all crew) _____

Sampling Method: ☐Electrofishing ☐Gill netting ☐Trap netting ☐Trawling ☐Seining ☐Angling ☐Other _____

Preservation Method: ☐Freezing ☐Other _____ Notes (SWFDB survey number): _____

FOR LAB USE ONLY- LAB ENTRY NO.	COLLECTION OR TAG NO.	SPECIES	DATE TAKEN	LOCATION	AGE	SEX &/OR REPROD. CONDIT	LENGTH ()	WEIGHT ()	REMARKS

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION CHAIN OF CUSTODY

I, _____, of _____ collected the
(Print Name) (Print Business Address)
 following on _____, 20____ from _____
(Date) (Water Body)
 in the vicinity of _____
(Landmark, Village, Road, etc.)
 Town of _____, in _____ County.
 Item(s) _____

 Said sample(s) were in my possession and handled according to standard procedures provided to me prior to collection. The sample(s) were placed in the custody of a representative of the New York State Department of Environmental Conservation on _____, 20____.

Signature Date

I, _____, received the above mentioned sample(s) on the date specified and assigned identification number(s) _____ to the sample(s). I have recorded pertinent data for the sample(s) on the attached collection records. The sample(s) remained in my custody until subsequently transferred, prepared or shipped at times and on dates as attested to below.

Signature Date

SECOND RECIPIENT (Print Name)	TIME & DATE	PURPOSE OF TRANSFER
SIGNATURE	UNIT	
THIRD RECIPIENT (Print Name)	TIME & DATE	PURPOSE OF TRANSFER
SIGNATURE	UNIT	
FOURTH RECIPIENT (Print Name)	TIME & DATE	PURPOSE OF TRANSFER
SIGNATURE	UNIT	
RECEIVED IN LABORATORY BY (Print Name)	TIME & DATE	REMARKS
SIGNATURE	UNIT	
LOGGED IN BY (Print Name)	TIME & DATE	ACCESSION NUMBERS
SIGNATURE	UNIT	

NOTICE OF WARRANTY

By signature to the chain of custody (reverse), the signatory warrants that the information provided is truthful and accurate to the best of his/her ability. The signatory affirms that he/she is willing to testify to those facts provided and the circumstances surrounding the same. Nothing in this warranty or chain of custody negates responsibility nor liability of the signatories for the truthfulness and accuracy of the statements provided.

HANDLING INSTRUCTIONS

On day of collection, collector(s) name(s), address(es), date, geographic location of capture (attach a copy of topographic map or navigation chart), species, number kept of each species, and description of capture vicinity (proper noun, if possible) along with name of Town and County must be indicated on reverse.

Retain organisms in manila tagged plastic bags to avoid mixing capture locations. Note appropriate information on each bag tag.

Keep samples as cool as possible. Put on ice if fish cannot be frozen within 12 hours. If fish are held more than 24 hours without freezing, they will not be retained or analyzed.

Initial recipient (either DEC or designated agent) of samples from collector(s) is responsible for obtaining and recording information on the collection record forms which will accompany the chain of custody. This person will seal the container using packing tape and writing his signature, the time and the date across the tape onto the container with indelible marker. Any time a seal is broken, for whatever purpose, the incident must be recorded on the Chain of Custody (reason, time, and date) in the purpose of transfer block. Container then is resealed using new tape and rewriting signature, with time and date.

EQUIPMENT LIST

Scale or balance of appropriate capacity for the fish to be collected.

Fish measuring board.

Plastic bags of an appropriate size for the fish to be collected and for site bags.

Individually numbered metal tags for fish.

Manila tags to label bags.

Small envelopes, approximately 2" x 3.5", if fish scales are to be collected.

Knife for removing scales.

Chain of custody and fish collection forms.

Clipboard.

Pens or markers.

Paper towels.

Dish soap and brush.

Bucket.

Cooler.

Ice.

Duct tape.

Appendix G – PFAS Analyte List

Group	Chemical Name	Abbreviation	CAS Number
Perfluoroalkyl sulfonic acids	Perfluorobutanesulfonic acid	PFBS	375-73-5
	Perfluoropentanesulfonic acid	PFPeS	2706-91-4
	Perfluorohexanesulfonic acid	PFHxS	355-46-4
	Perfluoroheptanesulfonic acid	PFHpS	375-92-8
	Perfluorooctanesulfonic acid	PFOS	1763-23-1
	Perfluorononanesulfonic acid	PFNS	68259-12-1
	Perfluorodecanesulfonic acid	PFDS	335-77-3
	Perfluorododecanesulfonic acid	PFDoS	79780-39-5
Perfluoroalkyl carboxylic acids	Perfluorobutanoic acid	PFBA	375-22-4
	Perfluoropentanoic acid	PFPeA	2706-90-3
	Perfluorohexanoic acid	PFHxA	307-24-4
	Perfluoroheptanoic acid	PFHpA	375-85-9
	Perfluorooctanoic acid	PFOA	335-67-1
	Perfluorononanoic acid	PFNA	375-95-1
	Perfluorodecanoic acid	PFDA	335-76-2
	Perfluoroundecanoic acid	PFUnA	2058-94-8
	Perfluorododecanoic acid	PFDaA	307-55-1
	Perfluorotridecanoic acid	PFTTrDA	72629-94-8
	Perfluorotetradecanoic acid	PFTeDA	376-06-7
Per- and Polyfluoroether carboxylic acids	Hexafluoropropylene oxide dimer acid	HFPO-DA	13252-13-6
	4,8-Dioxa-3H-perfluorononanoic acid	ADONA	919005-14-4
	Perfluoro-3-methoxypropanoic acid	PFMPA	377-73-1
	Perfluoro-4-methoxybutanoic acid	PFMBA	863090-89-5
	Nonafluoro-3,6-dioxaheptanoic acid	NFDHA	151772-58-6
Fluorotelomer sulfonic acids	4:2 Fluorotelomer sulfonic acid	4:2-FTS	757124-72-4
	6:2 Fluorotelomer sulfonic acid	6:2-FTS	27619-97-2
	8:2 Fluorotelomer sulfonic acid	8:2-FTS	39108-34-4
Fluorotelomer carboxylic acids	3:3 Fluorotelomer carboxylic acid	3:3 FTCA	356-02-5
	5:3 Fluorotelomer carboxylic acid	5:3 FTCA	914637-49-3
	7:3 Fluorotelomer carboxylic acid	7:3 FTCA	812-70-4
Perfluorooctane sulfonamides	Perfluorooctane sulfonamide	PFOSA	754-91-6
	N-methylperfluorooctane sulfonamide	NMeFOSA	31506-32-8
	N-ethylperfluorooctane sulfonamide	NEtFOSA	4151-50-2
Perfluorooctane sulfonamidoacetic acids	N-methylperfluorooctane sulfonamidoacetic acid	N-MeFOSAA	2355-31-9
	N-ethylperfluorooctane sulfonamidoacetic acid	N-EtFOSAA	2991-50-6
Perfluorooctane sulfonamide ethanol	N-methylperfluorooctane sulfonamidoethanol	MeFOSE	24448-09-7
	N-ethylperfluorooctane sulfonamidoethanol	EtFOSE	1691-99-2

Group	Chemical Name	Abbreviation	CAS Number
Ether sulfonic acids	9-Chlorohexadecafluoro-3-oxanonane-1-sulfonic acid (F-53B Major)	9Cl-PF3ONS	756426-58-1
	11-Chloroeicosafluoro-3-oxaundecane-1-sulfonic acid (F-53B Minor)	11Cl-PF3OUdS	763051-92-9
	Perfluoro(2-ethoxyethane) sulfonic acid	PFEESA	113507-82-7

Appendix H - Data Review Guidelines for Analysis of PFAS in Non-Potable Water and Solids

General

These guidelines are intended to be used for the validation of PFAS using EPA Method 1633 for projects within the Division of Environmental Remediation (DER). Data reviewers should understand the methodology and techniques utilized in the analysis. Consultation with the end user of the data may be necessary to assist in determining data usability based on the data quality objectives in the Quality Assurance Project Plan. A familiarity with the laboratory's Standard Operating Procedure may also be needed to fully evaluate the data. If you have any questions, please contact DER's Quality Assurance Officer, Dana Barbarossa, at dana.barbarossa@dec.ny.gov.

Preservation and Holding Time

Samples should be preserved with ice to a temperature of less than 6°C upon arrival at the lab. The holding time is 28 days to extraction for aqueous and solid samples. The time from extraction to analysis for aqueous samples is 28 days and 40 days for solids.

Temperature greatly exceeds 6°C upon arrival at the lab*	Use professional judgement to qualify detects and non-detects as estimated or rejected
Holding time exceeding 28 days to extraction	Use professional judgement to qualify detects and non-detects as estimated or rejected if holding time is grossly exceeded

*Samples that are delivered to the lab immediately after sampling may not meet the thermal preservation guidelines. Samples are considered acceptable if they arrive on ice or an attempt to chill the samples is observed.

Initial Calibration

The initial calibration should contain a minimum of six standards for linear fit and six standards for a quadratic fit. The relative standard deviation (RSD) for a quadratic fit calibration should be less than 20%.

The low-level calibration standard should be within 50% - 150% of the true value, and the mid-level calibration standard within 70% - 130% of the true value.

%RSD >20%	J flag detects and UJ non detects
-----------	-----------------------------------

Continuing Calibration Verification

Continuing calibration verification (CCV) checks should be analyzed at a frequency of one per ten field samples. If CCV recovery is very low, where detection of the analyte could be in question, ensure a low level CCV was analyzed and use to determine data quality.

CCV recovery <70 or >130%	J flag results
---------------------------	----------------

Blanks

There should be no detections in the method blanks above the reporting limits. Equipment blanks, field blanks, rinse blanks etc. should be evaluated in the same manner as method blanks. Use the most contaminated blank to evaluate the sample results.

Blank Result	Sample Result	Qualification
Any detection	<Reporting limit	Qualify as ND at reporting limit
Any detection	>Reporting Limit and >10x the blank result	No qualification
>Reporting limit	>Reporting limit and <10x blank result	J+ biased high

Field Duplicates

A blind field duplicate should be collected at rate of one per twenty samples. The relative percent difference (RPD) should be less than 30% for analyte concentrations greater than two times the reporting limit. Use the higher result for final reporting.

RPD >30%	Apply J qualifier to parent sample
----------	------------------------------------

Lab Control Spike

Lab control spikes should be analyzed with each extraction batch or one for every twenty samples. In the absence of lab derived criteria, use 70% - 130% recovery criteria to evaluate the data.

Recovery <70% or >130% (lab derived criteria can also be used)	Apply J qualifier to detects and UJ qualifier to non detects
---	---

Matrix Spike/Matrix Spike Duplicate

One matrix spike and matrix spike duplicate should be collected at a rate of one per twenty samples. Use professional judgement to reject results based on out of control MS/MSD recoveries.

Recovery <70% or >130% (lab derived criteria can also be used)	Apply J qualifier to detects and UJ qualifier to non detects of parent sample only
RPD >30%	Apply J qualifier to detects and UJ qualifier to non detects of parent sample only

Extracted Internal Standards (Isotope Dilution Analytes)

Problematic analytes (e.g. PFBA, PFPeA, fluorotelomer sulfonates) can have wider recoveries without qualification. Qualify corresponding native compounds with a J flag if outside of the range.

Recovery <50% or >150%	Apply J qualifier
Recovery <25% or >150% for poor responding analytes	Apply J qualifier
Isotope Dilution Analyte (IDA) Recovery <10%	Reject results

Signal to Noise Ratio

The signal to noise ratio for the quantifier ion should be at least 3:1. If the ratio is less than 3:1, the peak is discernable from the baseline noise and symmetrical, the result can be reported. If the peak appears to be baseline noise and/or the shape is irregular, qualify the result as tentatively identified.

Reporting Limits

If project-specific reporting limits were not met, please indicate that in the report along with the reason (e.g. over dilution, dilution for non-target analytes, high sediment in aqueous samples).

Peak Integrations

Target analyte peaks should be integrated properly and consistently when compared to standards. Ensure branched isomer peaks are included for PFAS where standards are available. Inconsistencies should be brought to the attention of the laboratory or identified in the data review summary report.