

---

# REMEDIAL INVESTIGATION WORK PLAN

for

**714 East 241st Street  
Block 5087; Lots 1, 3, 6, 59, 62, and p/o 65  
Bronx, New York**


**NYSDEC Site Number: C203077**

*Prepared For:*

**Enclave on 241 Street LLC  
2975 Westchester Avenue, Suite 100  
Purchase, New York 10577**

*Prepared By:*

**Langan Engineering, Environmental, Surveying  
and Landscape Architecture, D.P.C.  
555 Long Wharf Drive  
New Haven, Connecticut 06511**



---

**Ryan J. Wohlstrom  
Project Engineer**



---

**Jamie P. Barr, L.E.P.  
Senior Associate/Vice President**

**LANGAN**

**4 May 2015  
Langan Project No. 140115301**

## TABLE OF CONTENTS

<b>CERTIFICATION .....</b>	<b>1</b>
<b>1.0 INTRODUCTION .....</b>	<b>2</b>
<b>2.0 SITE BACKGROUND.....</b>	<b>2</b>
2.1 Site Description .....	2
2.2 Site Physical Conditions.....	3
2.2.1 Surrounding Property Land Use .....	3
2.2.2 Topography.....	3
2.2.3 Geology .....	4
2.2.4 Hydrogeology .....	4
2.3 Summary of Previous Environmental Investigations .....	4
2.4 Areas of Concern.....	9
<b>3.0 SCOPE OF WORK .....</b>	<b>11</b>
3.1 Soil Investigation .....	12
3.2 Groundwater Investigation.....	13
3.3 Soil Vapor Investigation .....	14
3.4 Monitoring Well Survey .....	14
3.5 Data Management and Validation .....	15
3.6 Management of Investigation-Derived Waste.....	15
3.7 Qualitative Human Health Exposure Assessment.....	16
<b>4.0 REMEDIAL INVESTIGATION REPORT .....</b>	<b>16</b>
<b>5.0 SCHEDULE.....</b>	<b>17</b>

## TABLES

Table 1 Proposed Sample Summary

## FIGURES

Figure 1 Site Location Map  
Figure 2 Proposed Boring Location Map  
Figure 3 Soil Analytical Results Map  
Figure 4 Groundwater Analytical Results Map

## APPENDICES

Appendix A Previous Environmental Reports  
Appendix B Health and Safety Plan  
Appendix C Quality Assurance Project Plan

## **CERTIFICATION**

I, Jamie P. Barr, certify that I am currently Qualified Environmental Professional as defined in 6 NYCRR Part 375 and that this Remedial Investigation Work Plan was prepared in accordance with all applicable statutes and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10).



---

Jamie P. Barr, L.E.P.  
Senior Associate/Vice President

## **1.0 INTRODUCTION**

This Remedial Investigation Work Plan (RIWP) was prepared on behalf of Enclave on 241 Street LLC (the “Applicant” or “Volunteer”), for the property located at 714 East 241<sup>st</sup> Street (Block 5087; Lots 1, 3, 6, 59, 62, and p/o 65) in the Wakefield section of the Bronx, New York (the “Site”). The Site is subject to New York State Department of Environmental Conservation (NYSDEC) review under the Spills Program (Spill No. 1214956, reported on 25 January 2013) and the Volunteer applied for acceptance into the New York State Brownfield Cleanup Program (BCP) on 4 February 2015 (BCP Site No. C203077). The objective of the RIWP is to investigate and characterize the nature and extent of environmental impacts on the Site and provide sufficient information to evaluate remedial actions, as required. This RIWP was developed in general accordance with the process identified in the New York State Department of Environmental Conservation (NYSDEC) DER-10 Technical Guidance for Site Investigation and Remediation (May 2010).

## **2.0 SITE BACKGROUND**

### **2.1 Site Description**

The Site consists of an approximate 24,060-square-foot irregularly shaped lot and includes approximately 100 feet of frontage along White Plains Road, 185 feet of frontage along 241<sup>st</sup> Street, and 135 feet of frontage along Furman Avenue. The New York City Transit Authority (NYCTA) #2 rail corridor and station platform are allocated above grade along the northwestern property line. A Site Location Map is included as Figure 1. The Site is comprised of lots 1, 3, 6, 59, 62, and p/o 65; however, on 22 December 2014, the Volunteer submitted an Application for Merger to the NYC Department of Finance Division of Land Records in order to combine the six lots into one. The tentative lot merger was approved on 8 January 2015 and the final lot merger approval is anticipated by 20 February 2015. The Site is comprised of the following addresses and lots:

- 714 East 241st Street (lot 1) – Developed with a vacant one-story office building with a basement.
- 4643 Furman Avenue (lot 3) – Developed with an asphalt-paved parking lot.
- 4641 Furman Avenue (lot 6) – Undeveloped dirt and grass lot.
- 4644 White Plains Road (lot 59) – Developed with a vacant one-story former gasoline station and auto body shop (since circa 1950)
- 700 East 241st Street (lot 62) – Developed with a vacant one-story former gasoline station and auto body shop (since circa 1935)
- 704 East 241st Street (p/o lot 65) – Undeveloped dirt and grass lot.

The Site contains three onsite buildings including an approximate 1,086-square-foot one-story office building with basement (lot 1), an approximate 3,375-square foot one-story former auto body shop building (lot 59), and an approximate 1,500-square foot one-story former auto body shop building (lot 62). The Site also contains asphalt- and concrete-paved exterior driving/parking areas and sparsely vegetated undeveloped area. The Site is bordered to the northwest by White Plains Road and an overhead NYCTA rail line, to the northeast by East 241st Street, to the southeast by Furman Avenue, and to the southwest by residential and commercial properties. The Site is subject to NYSDEC review under the Spills Program (Spill No. 12-14956).

## 2.2 Site Physical Conditions

### 2.2.1 Surrounding Property Land Use

The Site is located in an area primarily characterized by mixed commercial and industrial with light residential use, which is summarized in the table below:

Direction	Adjoining Properties	Surrounding Properties
Northwest	White Plains Road and an overhead NYCTA rail line	Multiple-story residential, commercial, and industrial buildings occupy the remaining surrounding properties.
Northeast	Furman Avenue	
Southeast	Furman Avenue and Lots 9, 12, 13, 14, 16, 18, 20, 22, and 33 (residential and commercial properties).	
Southwest	Block 5087, Lots 40, 48, 53, 54, 55, and 58 (residential and commercial properties)	

Sensitive receptors within a half mile of the Site include those listed below:

Number	NAME (Approximate distance from Site)	ADDRESS
1	Public School 016 Wakefield (1,200 feet west)	4550 Carpenter Avenue Bronx, New York 10470
2	All Seasons Day Care (1,800 feet south-southwest)	1701 Nereid Avenue Bronx, NY 10466

### 2.2.2 Topography

According to the United States Geological Survey (USGS) Bronx Quadrangle 7.5-minute Series Topographic Maps, the Site sits at an elevation of approximately 156 feet above mean sea level (msl). The topography in the immediate area of the Site is generally flat; however, overall topography generally slopes to the south.

### 2.2.3 Geology

Pleistocene glacial activity modified the landscapes and surficial features of the Bronx, Brooklyn, Queens, and the remainder of Long Island. The glaciation scoured uplands areas and deposited varying amounts of till (an unsorted mixture of sand, clay and boulders) across the lowlands and valleys. The area of the Bronx in which the Site is located is underlain by glacial deposits known as ground moraine. The ground moraine is a widespread dense layer of till material that typically consists of clay, sand and boulders. Bedrock outcrops were not observed at the site. According to the USGS Bedrock and Engineering Geologic Maps of Bronx County and Parts of New York and Queens Counties, New York, dated 1992, the Site is underlain by Middle Ordovician to Lower Cambrian-Ordovician Hartland Formation, which generally consists of muscovite-biotite-quartz schist with minor garnet.

The soil profile at the Site generally consists of a 3 to 4-foot thick layer of historic fill material consisting of varying amounts of sand and gravel with brick and coal ash, underlain by native brown silty-sand and sand. Bedrock has not been encountered at the Site; however, is estimated at approximately 140 feet bgs according to the USGS Bedrock and Engineering Geologic Maps.

### 2.2.4 Hydrogeology

Groundwater flow is typically topographically influenced, as shallow groundwater tends to originate in areas of topographic highs and flows toward areas of topographic lows, such as rivers, stream valleys, ponds, and wetlands. A broader, interconnected hydrogeologic network often governs groundwater flow at depth or in the bedrock aquifer. Groundwater depth and flow direction are also subject to hydrogeologic and anthropogenic variables such as precipitation, evaporation, extent of vegetation cover, and coverage by impervious surfaces. Other factors influencing groundwater include depth to bedrock, the presence of artificial fill, and variability in local geology and groundwater sources or sinks.

The approximate depth to groundwater is estimated at 9 to 11 feet bgs and, based on local topography, is expected to flow to the south-southwest. Potable water is provided to the Site by the City of New York and is derived from surface impoundments in the Croton, Catskill, and Delaware watersheds.

## **2.3 Summary of Previous Environmental Investigations**

Previous environmental reports were reviewed as part of this RIWP. Environmental reports prepared for the Site include the following:

- *Phase I Environmental Site Assessment (ESA) Report for 700 East 241<sup>st</sup> Street, dated 12 February 2008, prepared by Giorgio Engineering International, P.C. (GEI)*
- *Phase II Subsurface Investigation Report, dated 31 January 2013, prepared by Environmental Business Consultants (EBC)*
- *Phase I ESA Report, dated 9 January 2015, prepared by Langan*
- *Limited Phase II ESI Report, dated 3 February 2015, prepared by Langan*

These reports are summarized below and are included in Appendix A.

**Phase I Environmental Site Assessment (ESA) Report – 700 East 241<sup>st</sup> Street, Bronx, New York; Giorgio Engineering International (GEI), P.C.; 12 February 2008**

This Phase I ESA only pertains to the lot 62 of the Site. The Phase I identified the following Recognized Environmental Conditions (RECs):

- Presence of 55-Gallon Drum of Waste on the Site – During the site inspection conducted by GEI, a 55-gallon drum of waste was observed on the west side of the property. Due to the potential for a release this drum was deemed a REC. GEI recommended properly removing and disposing of this drum to eliminate the potential for a release.
- Lack of Waste Oil Manifest – During the site inspection conducted by GEI, waste oil was observed onsite; however, disposal manifests were not provided onsite. GEI recommended properly disposing of waste oil via disposal manifests.

**Phase II Subsurface Investigation Report for 700 East 241<sup>st</sup> Street, Environmental Business Consultants, 31 January 2013**

This report pertains to lots 1, 3, 6, 62, and p/o 65. The subsurface investigation was implemented on 15 January 2013. The investigation included completion of a geophysical survey, installation of nine soil borings (B1 through B9) and six temporary groundwater monitoring wells (GW1, GW3 through GW6, and GW9), and collection of ten grab soil samples and six groundwater samples (see Figures 3 and 4). The soil and groundwater samples were analyzed for VOCs and semi-volatile organic compounds (SVOCs). Soil analytical data was compared with New York Codes, Rules and Regulations (NYCRR) Title 6 Part 375 (6 NYCRR Part 375) Unrestricted Use Soil Cleanup Objectives (SCO) and Restricted-Residential Use SCOs and groundwater analytical data was compared to NYSDEC Division of Water Technical and Operation Guidance Series (TOGS) 1.1.1 Ambient Water Quality Standards (AWQS) for Class GA groundwater. The findings of this investigation are summarized below:

- The subsurface soil profile generally consists of a historic fill layer made up of brown silty-sand with brick between 1 to 3 feet below ground surface (bgs) underlain by a native brown silty-sand or sand. Bedrock was not encountered at any boring location at a maximum depth of 15 feet bgs.
- Groundwater was encountered at depths of approximately 10 to 12 feet bgs.
- The geophysical survey identified the two functioning USTs in the northern portion of the Site as well as a potential UST (suspected to be closed-in-place) located in the northwest portion of the Site.
- With the exception of soil boring B4, a soil sample was collected from each boring from the groundwater interface. For soil boring B4, a soil sample was collected at 5 to 10 feet bgs due to an odor noted that was not observed at the groundwater interface. A second sample was collected from soil boring B3 at 3 to 5 feet bgs due to a similar odor.
- Soil Impacts: The following constituents were detected in soil at concentrations that exceed their respective Unrestricted Use SCOs:
  - Nine VOCs, including acetone, benzene, ethylbenzene, methyl t-butyl ether (MTBE), n-propylbenzene, o-xylene/total xylene, toluene, 1,2,4-trimethylbenzene, and 1,3,5-trimethylbenzene.
  - One SVOC, naphthalene.
- Groundwater Impacts: The following constituents were detected in groundwater at concentrations exceeding TOGS AWQS.
  - Fifteen VOCs, including benzene, ethylbenzene, isopropylbenzene, m&p-xylenes, MTBE, naphthalene, n-butylbenzene, n-propylbenzene, o-xylene, p-isopropyltoluene, sec-butylbenzene, toluene, 1,2,4-trimethylbenzene, and 1,2-dibromoethane.
- Groundwater analytical results confirmed the presence of a petroleum release and Spill Case No. 12-14956 was opened by NYSDEC on 25 January 2013.

**Temporary Tank Closure Affidavit for 700 East 241<sup>st</sup> Street (lot 62), Bronx, New York; Brookside Environmental, Inc.; 6 January 2015**

Affidavit submitted to the FDNY Bureau of Fire Prevention by Brookside Environmental attesting to the proper cleaning and temporary closure of two gasoline USTs and one waste oil AST that remained at lot 62.



---

**Temporary Tank Closure Affidavit for 714 East 241st Street (lot 1), Bronx, New York; Brookside Environmental, Inc.; 6 January 2015**

Affidavit submitted to the FDNY Bureau of Fire Prevention by Brookside Environmental attesting to the proper cleaning and temporary closure of one 275-gallon heating oil AST that remained at lot 1.

**Phase I ESA Report for 714 East 241st Street, Block 5087; Lots 1, 3, 6, 59, 62, and p/o 65, Langan Engineering, Environmental, Surveying, and Landscape Architecture, 9 January 2015**

The Phase I identified the following as RECs:

- Historical Site Use: Portions of the Site were extensively used for auto repair and gasoline fueling purposes since at least 1935. Evidence of former auto repair equipment (empty automobile gas tanks, miscellaneous car parts, unlabeled 55-gallon drums, etc.) was apparent throughout the interior and exterior of the Site. Inadvertent releases of solvents, petroleum products, metals, polychlorinated biphenyls (PCB) and/or other chemicals used during historical operations may have adversely impacted soil, groundwater, building components and/or soil vapor. Discoloration, staining, and stressed vegetation were also apparent throughout the interior and exteriors of the Site (primarily lots 6, 59, 62, and p/o 65), suggesting incidental releases of petroleum products during auto maintenance. The concrete slabs of the buildings were compromised in several areas. Because fractures in the slab provide a conduit for spilled motor oils and/or petroleum products to impact subsurface conditions, former use of the Site constitutes a REC.
- On-Site Petroleum Bulk Storage: The following evidence of historical petroleum bulk storage was identified:
  - One 4,000-gallon gasoline UST (temporarily closed in-place), one 2,000-gallon gasoline UST (temporarily closed in-place), one 550-gallon gasoline UST (closed in-place), and one 550-gallon gasoline UST (closed-removed) had been present on lot 62 since at least 1935.
  - According to historical Sanborn Fire Insurance Maps and New York State Department of Buildings (NYCDOB) records, a gasoline service station historically occupied lot 59. Additionally, a 1965 Certificate of Occupancy (C of O) indicates that a fire department gasoline tank installation approval on the lot. Releases from the suspect tanks may have impacted soil, groundwater, and soil vapor.

- During the Phase I ESA site reconnaissance, a 275-gallon heating oil AST was observed in the basement of lot 1. The AST was observed to be in good condition with no staining or visual impacts to the floor below the AST; however, a brick-lined floor sump with a dirt base was observed below the AST. Because the floor sump provides a conduit for spilled heating oil to impact subsurface conditions, the heating oil AST and floor sump constitutes a REC.

The 4,000-gallon gasoline UST and 2,000-gallon gasoline UST located on lot 62 and the 275-gallon heating oil AST located of lot 1 were temporarily closed in-place on 22 December 2014. Based on the historic usage and presumed age of the tanks, the known and suspect historical petroleum storage tanks are a REC.

- NYSDEC Spill No. 1214956: On 25 January 2013, during a Phase II subsurface investigation, the NYSDEC issued Spill Number 1214956 to lot 62 when elevated concentrations of petroleum VOCs were identified in soil and groundwater in the vicinity of the gasoline USTs located in lot 62. This spill case is currently open.
- Current and Historical Use of Surrounding Properties: Current and historical uses of surrounding properties include:
  - Four drycleaners (4811 White Plains Road, 4701 White Plains Road, 4706 White Plains Road, and 4707 White Plains) with years of operation ranging from 1949 to present. Each of the four drycleaners are located upgradient of the Site.
  - Nine auto repair facilities (730 East 241st Street, 740 East 241st Street, 750 East 241st Street, 712 East 240th Street, 4580 White Plains Road, 4642 White Plains Road, 4609 Furman Avenue, 4619 Furman Avenue, and 4640 Furman Avenue) with years of operation ranging from 1935 to 2007. The auto repair facilities are located cross-gradient and downgradient of the Site.
  - Two gasoline filling stations (740 East 241st Street and 750 East 241st Street) with years of operation ranging from 1935 to 1993. The former filling stations are located crossgradient of the Site.
  - New York City Transit System Rail Yard (located approximately 150 feet southeast and crossgradient of the Site) with years of operation ranging from 1918 to 2007.

Potential petroleum and solvent releases associated with the historical and current surrounding property uses may have adversely impacted groundwater and/or soil vapor at the Site and is considered a REC.

---

**Phase II Environmental Site Investigation (ESI) – 714 East 241<sup>st</sup> Street, Block 5087; Lots 1, 3, 6, 59, 62, and p/o 65, Langan Engineering, Environmental, Surveying and Landscape Architecture, D.P.C., 3 February 2015**

This investigation included a geophysical survey and soil and groundwater sampling in the areas not previously investigated on the Subject Property (see Figures 3 and 4). Soil analytical data was compared with 6 NYCRR Part 375 Unrestricted Use SCOs and Restricted-Residential Use SCOs and groundwater analytical data was compared to NYSDEC TOGS 1.1.1 Class GA AWQS. Based on the observations and results of this investigation, Langan concluded the following:

- A layer of historic fill composed of varying amounts of sand and gravel, and fragments of brick, glass, wood, and coal ash was identified throughout the Subject Property with thicknesses ranging from approximately 3 to 4 feet. This fill layer contained Restricted-Residential SCO exceedances of SVOCs and metals throughout the Site.
- The geophysical survey identified a large subsurface anomaly indicative of an UST on the northwestern edge of the Site along the sidewalk of White Plains Road (on lot 59). The previously unidentified anomaly measured approximately 20 feet in length and 8 feet in width and was observed at approximately 4 feet bgs. The geophysical survey also confirmed the locations of site utilities as well as the three previously known USTs located on the northern portion of the Site (see Figure 3 included in Exhibit E).
- One of the seven soil borings (SB-3) was installed next to the suspected UST along White Plains Road that was discovered during the geophysical survey. Petroleum-like odors and PID readings (up to 1,095 ppm) were observed in the soil boring at depths of approximately 10 to 16 feet bgs. Groundwater analytical sampling results from this location confirmed the presence of a petroleum contamination. To a lesser degree, olfactory evidence of petroleum-like odors were also observed in borings SB-1 through SB-3 (with PID readings up to 17.8 ppm).
- The approximate depth to groundwater is estimated at 9 to 11 feet bgs. No free product was identified during this Limited Phase II ESI; however, a petroleum-like odor was detected during groundwater purging and sampling activities at SB-3(MW) and groundwater analytical sampling results from this location, confirmed the presence of a petroleum contamination.

## **2.4 Areas of Concern**

Based on findings and observations during previous environmental investigations listed in section 2.3, the following Areas of Concern (AOC) were identified and are shown on Figure 2:

### **AOC 1: Historical Site Use**

AOC 1 represents the historical use of the Site for auto repair and gasoline fueling purposes since at least 1935. Evidence of former auto repair equipment (empty automobile gas tanks, miscellaneous car parts, unlabeled 55-gallon drums, etc.) is apparent throughout the interior and exterior of the Site. Inadvertent releases of solvents, petroleum products, metals, PCBs and/or other chemicals used during historical operations may have adversely impacted soil, groundwater, building components and/or soil vapor. Discoloration, staining, and stressed vegetation were also apparent throughout the interior and exteriors of the Site, suggesting incidental releases of petroleum products during auto maintenance. The concrete slabs of the buildings were compromised in several areas, which provide a conduit for impact to subsurface conditions. Contaminants of concern include VOCs, SVOCs, PCBs, and metals in soil and groundwater, and VOCs in soil vapor.

### **AOC 2: Gasoline USTs and Open Spill Case No. 1214956 on Lot 62**

AOC 2 represents the location of up to four closed in-place gasoline USTs and the open NYSDEC Spill Case No. 1214956 in the eastern area of lot 62. According to available records, one 4,000-gallon gasoline UST temporarily closed in-place), one 2,000-gallon gasoline UST (temporarily closed in-place), one 550-gallon gasoline UST (closed in-place), and one 550-gallon gasoline UST (closed-removed) had been present on former lot 62 since at least 1935. During a 2013 Phase II subsurface investigation, elevated concentrations of petroleum-related VOCs were identified in soil and groundwater in the vicinity of gasoline USTs. Contaminants of concern include petroleum VOCs and SVOCs in soil and groundwater and VOCs in the soil vapor.

### **AOC 3: Suspect UST in Northern Corner of Lot 62**

AOC 3 represents the location of a suspect UST in the northwest corner of former lot 62. A geophysical anomaly indicative of a UST was identified in this area during a geophysical survey completed as part of the Limited Phase II in January 2015. There is no documentation of proper removal or abandonment. The UST likely remains at the Site and releases from the tank may have impacted soil, groundwater, and/or soil vapor. Contaminants of concern include petroleum VOCs and SVOCs in the soil and groundwater and VOCs in the soil vapor.

### **AOC 4: Suspect UST along Western Edge of Lot 65**

AOC 4 represents the location of a suspect UST along the western edge of Lot 65. A geophysical anomaly indicative of a UST was identified during a geophysical survey completed as part of the Limited Phase II in January 2015. During the completion of soil boring SB-3 that installed next to the suspected UST, petroleum-like odors and PID readings (up to 1,095 ppm)

were observed at depths of approximately 10 to 16 feet bgs. Groundwater analytical sampling results from this location confirmed the presence of a petroleum contamination. Contaminants of concern include petroleum VOCs and SVOCs in the soil and groundwater and VOCs in the soil vapor.

### **AOC 5: Former Fuel Oil AST and Sump Located in the Basement of Lot 1**

AOC 5 represents a brick-lined floor sump under a 275-gallon heating oil AST located in the basement of former lot 1. During the Phase I ESA site reconnaissance, the brick-lined floor sump was observed with a dirt base directly below the AST. The floor sump provides a conduit for spilled heating oil to impact subsurface conditions. Contaminants of concern include petroleum VOCs and SVOCs in soil and groundwater and VOCs in soil vapor.

## **3.0 SCOPE OF WORK**

The objective of this RIWP is the “investigation and characterization of the nature and extent of the contamination within the boundary of the Site” per Environmental Conservation Law Article 27, Title 14 (Brownfield Legislation). The field investigation work will include the tasks listed below to supplement the data and findings of previous investigations. The rationale for each investigation point in relation to the AOCs is provided in Table 1. These tasks are discussed in more detail in the following sections.

- Soil Borings and Sampling
  - Advancement of 18 soil borings to approximately 5 feet below groundwater or to refusal.
  - Collection of four surficial soil samples between approximately zero and two feet below ground surface.
  - Collection of two soil samples from each soil boring location for a total of 48 soil samples (plus quality assurance/quality control [QA/QC] sampling).
- Monitoring Wells and Sampling
  - Installation of eight monitoring wells at soil boring locations.
  - Collection of one groundwater sample from each monitoring well for a total of eight groundwater samples (plus QA/QC sampling).
  - Survey and gauging of monitoring wells to evaluate flow and contour.
- Soil Vapor Points and Sampling
  - Installation of eleven soil vapor sampling points to a depth of approximately 6 feet bgs.

- Collection of one soil vapor sample from each soil vapor point for a total of eleven soil vapor samples (plus QA/QC sampling)

Modifications to this scope of work may be required: 1) due to Site operations, equipment or restrictions; 2) in the event that unexpected contamination is detected and additional analytical data is needed; and 3) to ensure that contamination is adequately characterized and delineated in compliance with the Brownfield Law, regulations and applicable investigation guidance documents (e.g., DER-10).

The field investigation work will be completed in accordance with the procedures specified in Langan's Health and Safety Plan (HASP) and Quality Assurance Project Plan (QAPP) provided in Appendices B and C, respectively.

Names, contact information and roles of the principal personnel who will participate in the investigation including the project manager, contractor and subcontractor contacts are listed below. Resumes for each person are provided the QAPP (Appendix C).

Personnel	Investigation Role	Contact Information
Jamie P. Barr, L.E.P. Langan Engineering	Project Director	Phone – 203-784-3034 Email – jbarr@langan.com
Joel Landes, P.E. Langan Engineering	Remediation Engineer	Phone – 212-479-5404 Email – jlandes@langan.com
Ryan J. Wohlstrom Langan Engineering	Project Manager	Phone – 203-784-3069 Email – rwohlstrom@langan.com
Tony Moffa, CHMM Langan Engineering	Langan Health & Safety Officer	Phone – 215-491-6500 Email – tmoffa@langan.com
David Granucci Langan Engineering	Field Safety Officer & Quality Assurance Officer	Phone – 203-784-3052 Email – dgranucci@langan.com
Justin Hall Langan Engineering	Field Team Leader	Phone – 203-640-3180 Email – jhall@langan.com

### 3.1 Soil Investigation

An environmental drilling subcontractor will advance 18 soil borings (designated SB07 through SB23). The purpose of these borings is to investigate and characterize the nature and extent of environmental impacts associated with AOCs identified in Section 2.4 and supplement the environmental investigations performed in 2013 and 2015 (refer to Figures 3 and 4 for previous investigation data). A plan showing the proposed boring locations is shown on Figure 2. A Langan engineer will document the work, screen the soil samples for environmental impacts, and collect environmental samples for laboratory analyses. Work will comply with the safety guidelines outlined in the HASP (Appendix B).

The soil borings will be advanced to 5 feet below groundwater or to refusal using direct push, sonic or auger drilling methodologies. Soil borings located in the rear of Parcel 65 will be advanced to 15 feet below ground surface, or to refusal, to further characterize onsite soil that will remain during redevelopment. Soil will be screened continuously to the boring termination depth for organic vapors with a PID equipped with a 10.6 electron volt (eV) bulb, and for visual and olfactory indications of environmental impacts (e.g., staining and odor). Soil descriptions will be recorded in a field log.

Two grab soil samples will be collected for laboratory analysis from each boring location. The sampling program is summarized in Table 1. One sample will be collected from the interval just above the water table and a second sample will be collected from the area of material exhibiting the highest degree of contamination (evidenced by discoloration, odor or PID readings above background).

Four surficial soil samples will be collected between one and two feet below ground surface in the area of the Site with vegetative cover to assist in determining if future soil removal may be required in this area.

The samples will be collected in laboratory-supplied containers and will be sealed, labeled, and placed in a cooler containing ice (to maintain a temperature of approximately 4 degrees Celsius) for delivery to a New York State Department of Health (NYSDOH) Environmental Laboratory Approval Program (ELAP)-certified analytical laboratory. Soil samples will be analyzed for 6 NYCRR Part 375 VOCs, SVOCs, metals, PCBs, and pesticides. If free product is encountered, representative samples of the product will be collected for laboratory fingerprint analysis. QA/QC procedures to be followed are described in the QAPP provided as Appendix C.

### **3.2 Groundwater Investigation**

Six borings (SB07, SB08, SB10, SB11, SB13, SB15, SB16, and SB17) will be converted into groundwater monitoring wells. Proposed monitoring well locations are shown on Figure 2. Soil conditions will be screened, logged and sampled as described in Section 3.2. Wells will be constructed to straddle the observed water table. The wells will be constructed with 2-inch diameter, threaded, flush-joint, polyvinyl chloride (PVC) casing and 0.01-inch slot screens. Clean sand or prepack sand will be used to fill the annulus around the screen up to approximately 1 foot above the top of the screened interval. A bentonite seal will be installed above the sand, and the borehole annulus will be grouted to the surface with bentonite/cement slurry.

Following installation, the well will be purged and developed by purging a minimum of three well volumes and waiting until the water becomes clear. The well will then be allowed to rest for at least one week after development prior to sampling. One groundwater sample will be

collected from each well. Prior to sampling, the monitoring wells will be gauged for static water levels and each well will be purged. Gauging will be completed with a dual-phase interface probe in order to detect the potential presence of free product. If free product is encountered, representative samples of the product will be collected for laboratory fingerprint analysis. Purging will consist of pumping a minimum of three well volumes and waiting until the physical and chemical parameters (e.g., temperature, dissolved oxygen, oxygen reduction potential, turbidity) stabilize, with turbidity below 50 Nephelometric Turbidity Units [NTU]. Groundwater samples will be analyzed for VOCs, SVOCs, and metals (filtered and unfiltered). QA/QC procedures are described in the QAPP provided as Appendix C.

### **3.3 Soil Vapor Investigation**

A soil vapor investigation consisting of eleven investigation points, designated SV01, SV02, SV03, SV04, SV05, SV06, SV07, SV08, SV09, SV10, and SV11, will be completed. Proposed soil vapor sampling point locations are shown on Figure 2. Vapor sampling will be conducted in accordance with the October 2006 Guidance for Evaluating Soil Vapor Intrusion in the State of New York. An environmental driller will install each point to a depth of approximately 6 to 8 ft bgs, depending on the depth of the water table. For soil vapor samples, the sampling point (a new, dedicated stainless-steel screen implant) will be connected to polyethylene or Teflon tubing that will extend to a depth approximately 2 feet above the water table. Approximately one foot of clean sand filter pack will be placed around the screen implant. The remaining annular space will be backfilled to grade with hydrated bentonite. The seal on the vapor points will be checked with a helium tracer gas test.

Prior to sampling, three well volumes will be purged from the point using a MultiRAE multi-gas monitor, which pumps air below the 0.2 liters per minute. The multi-gas monitor will also be used to screen the soil vapor for the presence of VOCs. Following purging, each soil vapor point will be sampled using laboratory-provided, 6-Liter air canisters equipped with 2-hour sample interval flow controllers. Soil vapor samples will be analyzed for VOCs by EPA Method TO-15. QA/QC procedures to be followed are described in the QAPP provided as Appendix C. Prior to sampling, soil vapor sample points will undergo a leak check using helium tracer gas. Soil vapor sampling will occur if the leak check confirms a competent seal.

### **3.4 Monitoring Well Survey**

Langan will survey the location and elevation of the groundwater monitoring wells (top of casing elevations). This data will be used with the groundwater well gauging data to prepare an updated groundwater contour map and document the direction of groundwater flow. Vertical control will be established by surveying performed relative to the BPQD by a NYS-licensed land surveyor. Elevations of the top of monitoring well casings and protective well casings will be surveyed to the nearest 0.01 foot.



### **3.5 Data Management and Validation**

All laboratory analyses of soil, groundwater and vapor samples will be conducted by a NYSDOH, ELAP-approved laboratory. Laboratory analyses will be conducted in accordance with USEPA SW-846 methods and NYSDEC Analytical Services Protocol (ASP) B deliverable format. Environmental data will be reported electronically using the database software application EQulS as part of NYSDEC's Environmental Information Management System (EIMS).

Table 1 summarizes the anticipated samples and analytical methodology. We will follow the QA/QC procedures required by the NYSDEC ASP and SW-846 methods, including initial and continuing instrument calibrations, standard compound spikes, surrogate compound spikes, and analysis of other samples (blanks, laboratory control samples, and matrix spikes/matrix spike duplicates). The laboratory will provide sample bottles, which have been pre-cleaned and preserved in accordance with the SW-846 methods. Where there are differences in the SW-846 and NYSDEC ASP requirements, the NYSDEC ASP shall take precedence.

We will perform data validation in accordance with the United State Environmental Protection Agency (USEPA) validation guidelines for organic and inorganic data review. Validation will include the following:

- Verification of QC sample results (both qualitative and quantitative).
- Verification of sample results (both positive hits and non-detects).
- Recalculation of 10% of all investigative sample results.
- Preparation of Data Usability Summary Report (DUSR).

The DUSR will be prepared and reviewed by the Program Quality Assurance Monitor (PQAM) before issuance. The DUSR will present the results of data validation, including a summary assessment of laboratory data packages, sample preservation and COC procedures, and a summary assessment of precision, accuracy, representativeness, comparability, and completeness for each analytical method. A detailed assessment of each sample delivery group (SDG) will follow. Additional details on the DUSR are provided in the QAPP in Appendix C.

### **3.6 Management of Investigation-Derived Waste**

Drill cuttings and other soil generated on-site during the investigation will be stored on protective sheeting and covered if the cuttings remain at the end of the day. The cuttings will be backfilled within the borehole that generated them to within 12-inches of the surface, unless the soil is grossly contaminated, a monitoring well is being installed in the borehole, the boring

has penetrated a confining layer, a path for vertical migration would be completed, or the cuttings will not fit in the borehole.

All soil cuttings that cannot be backfilled and groundwater investigation-derived wastes (IDW) will be containerized and disposed properly at an off-site facility. Soils may be disposed off-site in 55-gallon, United Nations/Department of Transportation (DOT)-approved drums. Personal protective equipment and supplies will be disposed as solid waste. Fluids will be placed in UN/DOT-approved fluid drums with closed tops. All drums will be properly labeled, sealed, and characterized as necessary. The drums will be staged in a secure area on site, pending disposal to an appropriate disposal facility upon receipt of analytical results.

### **3.7 Qualitative Human Health Exposure Assessment**

A Qualitative Human Health Exposure Assessment will be conducted in accordance with Appendix 3B of the NYSDEC DER-10, Technical Guidance for Site Investigation and Remediation. The assessment will be submitted in the Remedial Investigation Report.

## **4.0 REMEDIAL INVESTIGATION REPORT**

Following completion of the Remedial Investigation and receipt of analytical data, a Remedial Investigation Report (RIR) will be prepared. The report will include: 1) a summary of the Site history and previous investigations; 2) description of site conditions and this remedial investigation; 3) evaluation of the results and findings; and 4) conclusions and recommendations. Additionally, the Standards, Criteria, and Guidance (SCGs) which pertain to the Site location and contaminants, as well as, potential remedial action objectives will be identified in the report. The soil boring and well/vapor point construction logs, sampling logs, and laboratory analytical reports will be appended to the report. Conclusions and recommendations will be provided that: 1) summarize the nature and extent of potential impact for each areas of concern; 2) identify unacceptable exposure pathways (as determined through a Qualitative Human Health Exposure Assessment); and 3) recommend future work or remedial actions, as required.

The sampling results that exceed unrestricted soil SCGs, the groundwater standards or other applicable unrestricted SCGs will be summarized in tables (organized by areas of concern). The tables will include sample location, media sampled, sample depth, field/laboratory identification numbers, analytical results and the applicable unrestricted SCG for comparison. Scaled Site maps will be used to show the boring, monitoring well, and soil vapor point locations, SCG exceedances, groundwater elevation contours, groundwater flow direction, and, if appropriate, groundwater contaminant concentration contours.

## 5.0 SCHEDULE

The table below presents an estimated schedule for the proposed remedial investigation and reporting. If the schedule changes, it will be updated and submitted to NYSDEC.

<b>Schedule Milestone</b>	<b>Weeks from Submittal of RIWP</b>	<b>Duration (weeks)</b>
Submittal of RIWP	0	-
DEC Approval of RIWP	6	6
Fact Sheet to Announce Start of RI	7	1
Remedial Investigation & Laboratory Analysis (Pending Site Demolition Activities)	14	4
Completion of DUSR	18	3
Prepare and submit RIR for NYSDEC review and Approval	21	3

## TABLES

TABLE 1 - PROPOSED SAMPLE SUMMARY  
Enclave on 241st Street Development  
Bronx, New York  
Langan Project No. 140115301


No.	Sample Name	Type	Boring	Rationale	Depth <sup>2</sup>	Analysis <sup>1</sup>
SOIL						
1	SB07_depth	Grab	SB07	Investigate AOC 1, AOC 4, & Close Data Gap	most impacted in fill above water table	Part 375 VOCs, SVOCs, Metals, PCBs, and Pesticides
2	SB07_depth		SB08	Investigate AOC 1, AOC 3, and Close Data Gap	most impacted in fill above water table	
3	SB08_depth				most impacted in fill above water table	
4	SB08_depth		SB09	Investigate AOC 1, AOC 3, & Close Data Gap	most impacted in fill above water table	
5	SB09_depth				most impacted in fill above water table	
6	SB09_depth		SB10	Investigate AOC 1 & Close Data Gap	most impacted in fill above water table	
7	SB10_depth				most impacted in fill above water table	
8	SB10_depth		SB11	Investigate AOC 1, AOC 3, & Close Data Gap	most impacted in fill above water table	
9	SB11_depth				most impacted in fill above water table	
10	SB11_depth		SB12	Investigate AOC 1 & Close Data Gap	most impacted in fill above water table	
11	SB12_depth				most impacted in fill above water table	
12	SB12_depth		SB13	Investigate AOC 1 and AOC 5	most impacted in fill above water table	
13	SB13_depth				most impacted in fill above water table	
14	SB13_depth		SB14	Investigate AOC 1 and Close Data Gap	most impacted in fill above water table	
15	SB14_depth				most impacted in fill above water table	
16	SB14_depth		SB15	Investigate AOC 1 and Close Data Gap	most impacted in fill above water table	
17	SB15_depth				most impacted in fill above water table	
18	SB15_depth		SB16	Investigate AOC 1 and Close Data Gap	most impacted in fill above water table	
19	SB16_depth				most impacted in fill above water table	
20	SB16_depth		SB17	Investigate AOC 1 and Close Data Gap	most impacted in fill above water table	
21	SB17_depth				most impacted in fill above water table	
22	SB17_depth		SB18	Investigate AOC 1 and Close Data Gap	most impacted in fill above water table	
23	SB18_depth				most impacted in fill above water table	
24	SB18_depth		SB19	Investigate AOC 1, AOC 3 and Close Data Gap	most impacted in fill above water table	
25	SB19_depth				most impacted in fill above water table	
26	SB19_depth		SB20	Investigate AOC 1, AOC 3 and Close Data Gap	most impacted in fill above water table	
27	SB20_depth				most impacted in fill above water table	
28	SB20_depth		SB21	Investigate AOC 1 and Close Data Gap	most impacted in fill above water table	
29	SB21_depth				most impacted in fill above water table	
30	SB21_depth		SB22	Investigate AOC 1, AOC 4 and Close Data Gap	most impacted in fill above water table	
31	SB22_depth				most impacted in fill above water table	
32	SB22_depth		SB23	Investigate AOC 1, AOC 2 and Close Data Gap	most impacted in fill above water table	
33	SB23_depth				most impacted in fill above water table	
34	SB23_depth		SB24	Investigate AOC 1	most impacted surficial soil	
35	SB24_depth				most impacted surficial soil	
36	SB25_depth		SB25	Investigate AOC 1	most impacted surficial soil	
37	SB25_depth				most impacted surficial soil	
38	SB26_depth		SB26	Investigate AOC 1	most impacted surficial soil	
39	SB26_depth	most impacted surficial soil				
40	SB27_depth	SB27	Investigate AOC 1	most impacted surficial soil		
41	SB27_depth			most impacted surficial soil		
39	SODUP01_date	Duplicate	TBD	QA/QC	TBD	
40	SODUP02_date	Duplicate	TBD	QA/QC	TBD	
41	SODUP03_date	Duplicate	TBD	QA/QC	TBD	
42	MS/MSD-SO01_date	MS/MSD	TBD	QA/QC	TBD	
43	SBFB01_date	Field Blank	TBD	QA/QC	TBD	
44	SBFB01_date	Field Blank	TBD	QA/QC	TBD	
45	SBTB01_date	Trip Blank	TBD	QA/QC	TBD	Part 375 VOCs
46	SBTB02_date		TBD	QA/QC	TBD	
GROUNDWATER						
1	MW07_date	Grab	MW07	Investigate AOC 1, AOC 4, & Close Data Gap	center of water column	TCL VOCs, SVOCs, TAL Metals (filtered + unfiltered)
2	MW08_date		MW08	Investigate AOC 1, AOC 3, Potential Offsite Sources, & Close Data Gap		
3	MW10_date		MW10	Investigate AOC 1 & Close Data Gap		
4	MW11_date		MW11	Investigate AOC 1, AOC 3, & Close Data Gap		
5	MW13_date		MW13	Investigate AOC 1, AOC 5, & Close Data Gap		
6	MW15_date		MW15	Investigate AOC 1 & Close Data Gap		
7	MW16_date		MW16	Investigate AOC 1, & Close Data Gap		
8	MW17_date		MW17	Investigate AOC 1, Potential Offisite Sources, &		
9	GWDUP01_date	Duplicate	TBD	QA/QC	TBD	
10	GWFB01_date	Field Blank	TBD	QA/QC		
11	MS/MSD-GW01_date	MS/MSD	TBD	QA/QC	center of water column	TCL VOC
12	GWTB01_date	Trip Blank	NA	QA/QC	NA	
SOIL VAPOR						
1	SV01_date	2 hour	SV01	Investigate AOC 1, AOC 4, & Close Data Gap	2 feet above water table	TO-15 VOC
2	SV02_date		SV02	Investigate AOC 1,AOC 3, & Close Data Gap		
3	SV03_date		SV03	Investigate AOC 1, AOC 2, & Close Data Gap		
4	SV04_date		SV04	Investigate AOC 1 & Close Data Gap		
5	SV05_date		SV05	Investigate AOC 1, AOC 5, & Close Data Gap		
6	SV06_date		SV06	Investigate AOC 1 & Close Data Gap		
7	SV07_date		SV07	Offisite Sources, & Close Data Gap		
8	SV08_date		SV08	Offisite Sources, & Close Data Gap		
9	SV09_date		SV09	Investigate AOC 1 & Close Data Gap		
10	SV10_date		SV10	Offisite Sources, & Close Data Gap		
11	SV11_date		SV11	Offisite Sources, & Close Data Gap		
7	AMB01_date		Ambient	QA/QC	-	

Notes:

- 1. All volatile site characterization samples will be collected using Encore or Terra Core sampler kits.
  - 2. Additional characterization samples will be collected when obvious solvent or petroleum impacted material is encountered.
- TBD- To be determined in the field  
VOC- Volatile organic compounds  
SVOC- Semivolatile organic compounds  
PCB- Polychlorinated biphenyls  
TCL- Target compound list  
TAL- Target analyte list  
QA/QC- Quality assurance/quality control

## FIGURES



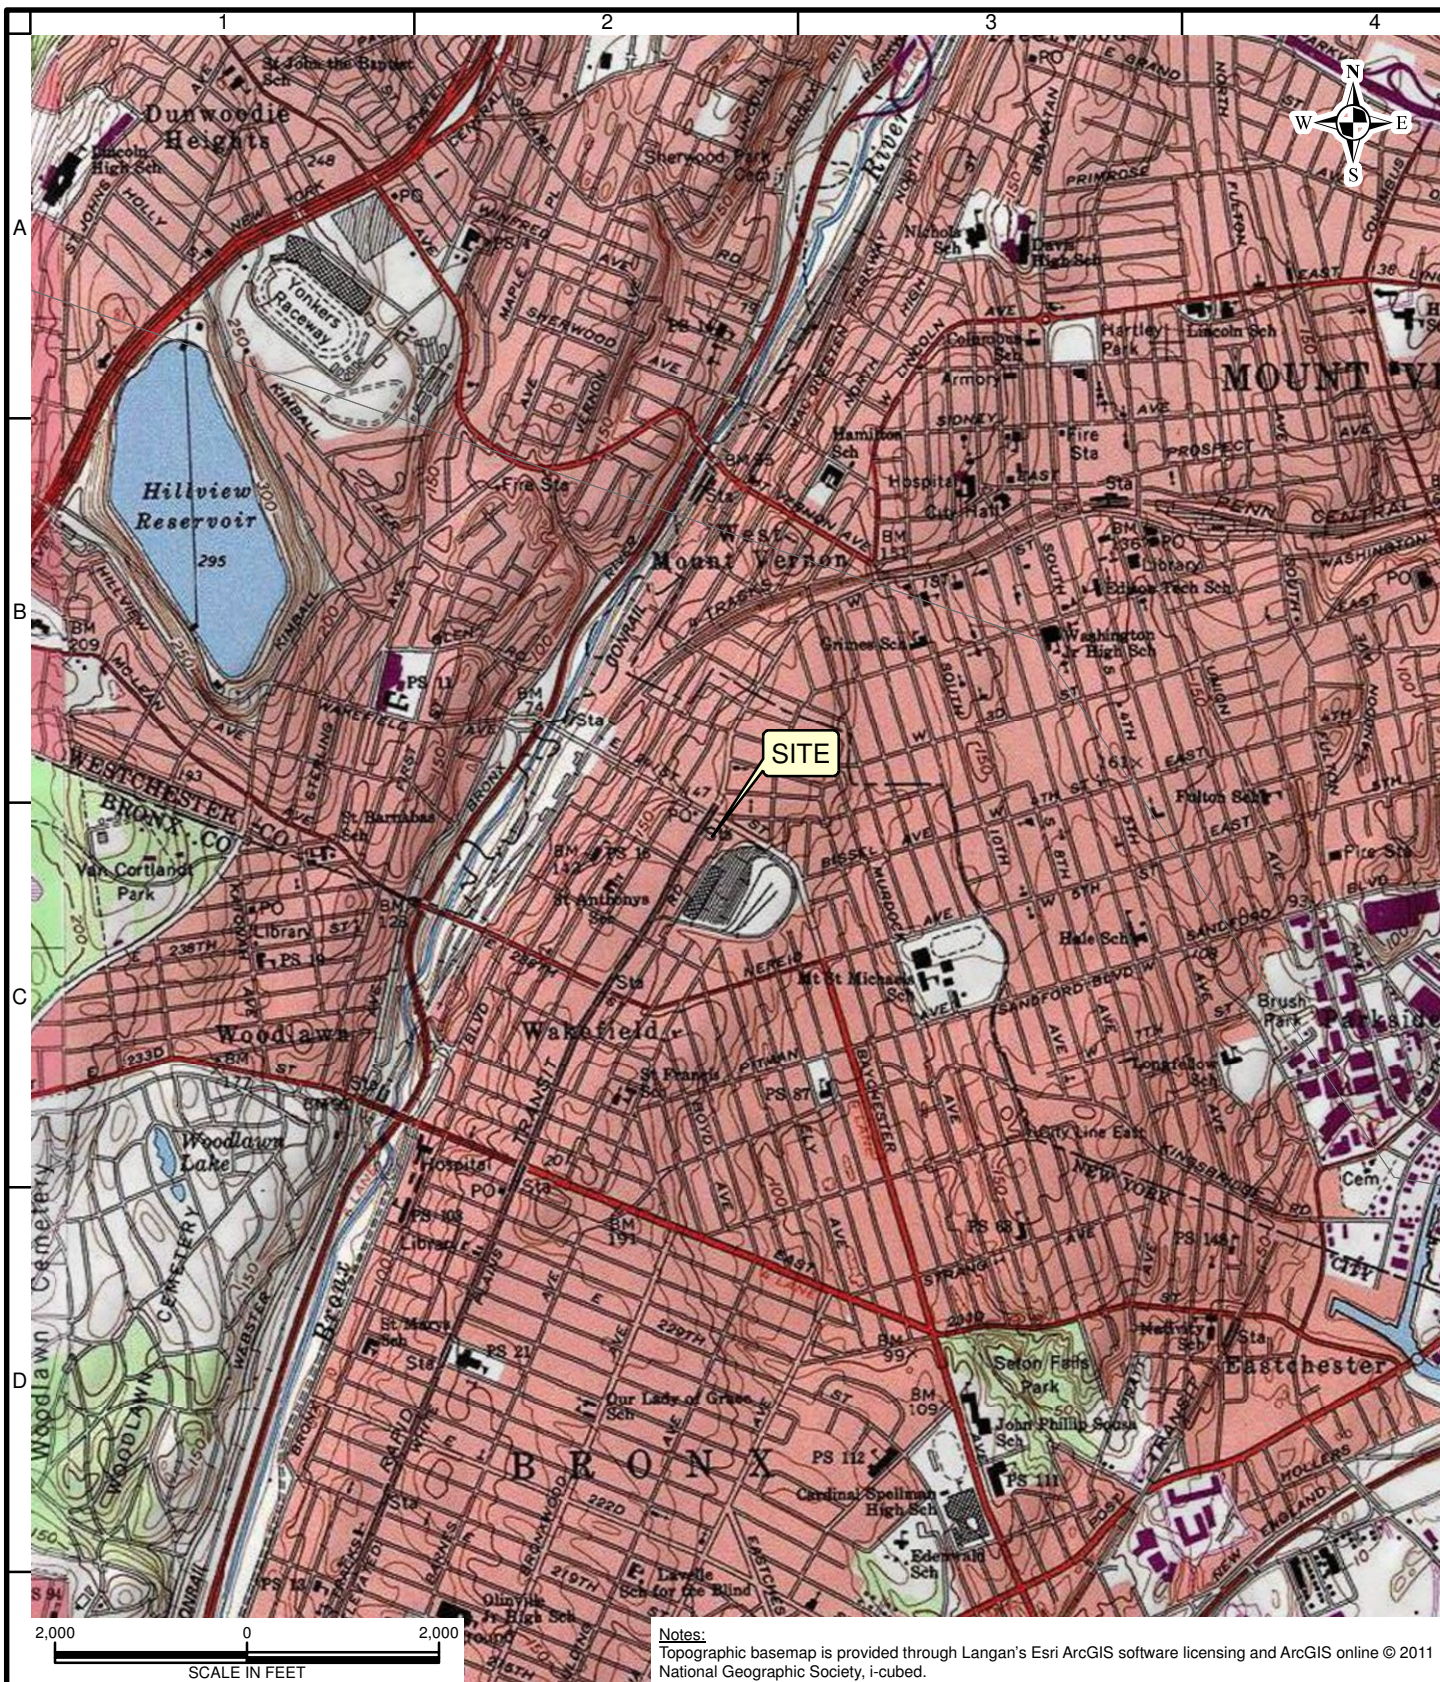

**LANGAN**

555 Long Wharf Drive  
New Haven, CT 06511-6107  
T: 203.562.5771 F: 203.789.6142 www.langan.com

Langan Engineering & Environmental Services, Inc.  
Langan Engineering, Environmental, Surveying and  
Landscape Architecture, D.P.C.  
Langan International LLC  
Collectively known as Langan

Project

**ENCLAVE ON  
241ST STREET  
DEVELOPMENT**

BLOCK No. 5087  
LOT Nos. 1, 3, 6, 59, 62, p/o 65

BRONX

NEW YORK

Drawing Title

**SITE LOCATION  
MAP**

Project No.

140115301

Date

5/4/2015

Scale

1"=2,000'

Drawn By

RJW


Submission Date

5/4/2015


Figure

1



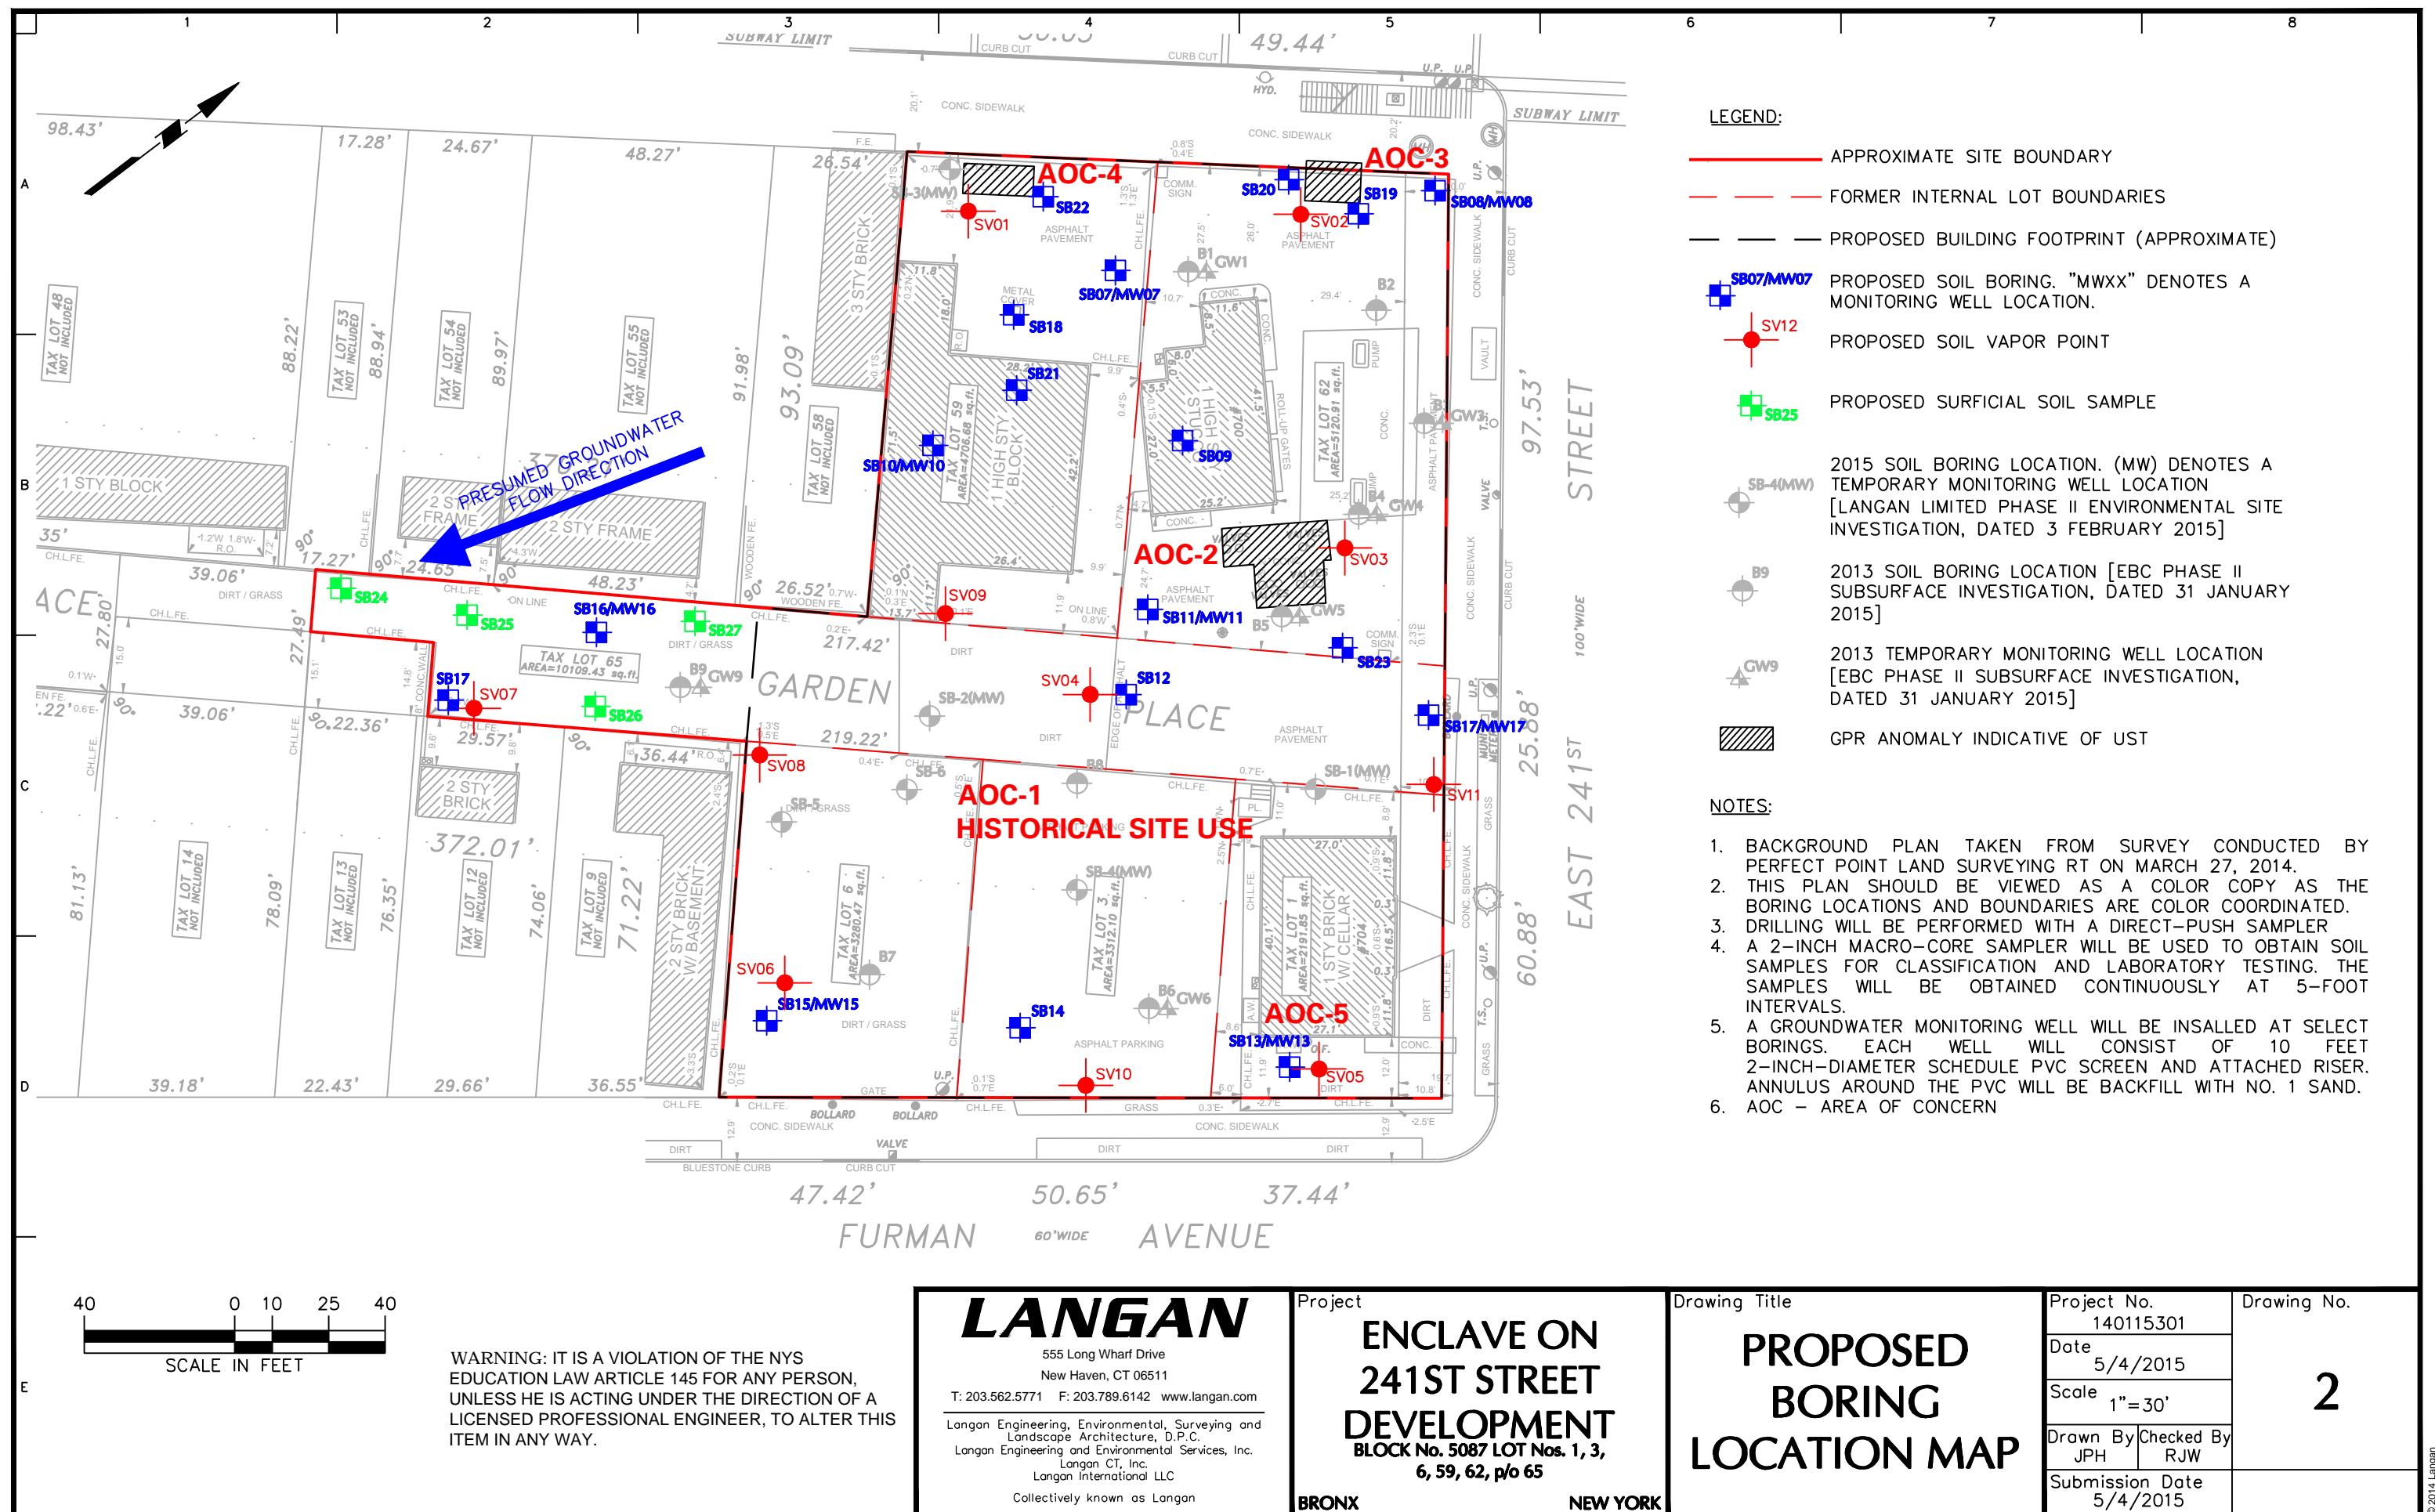



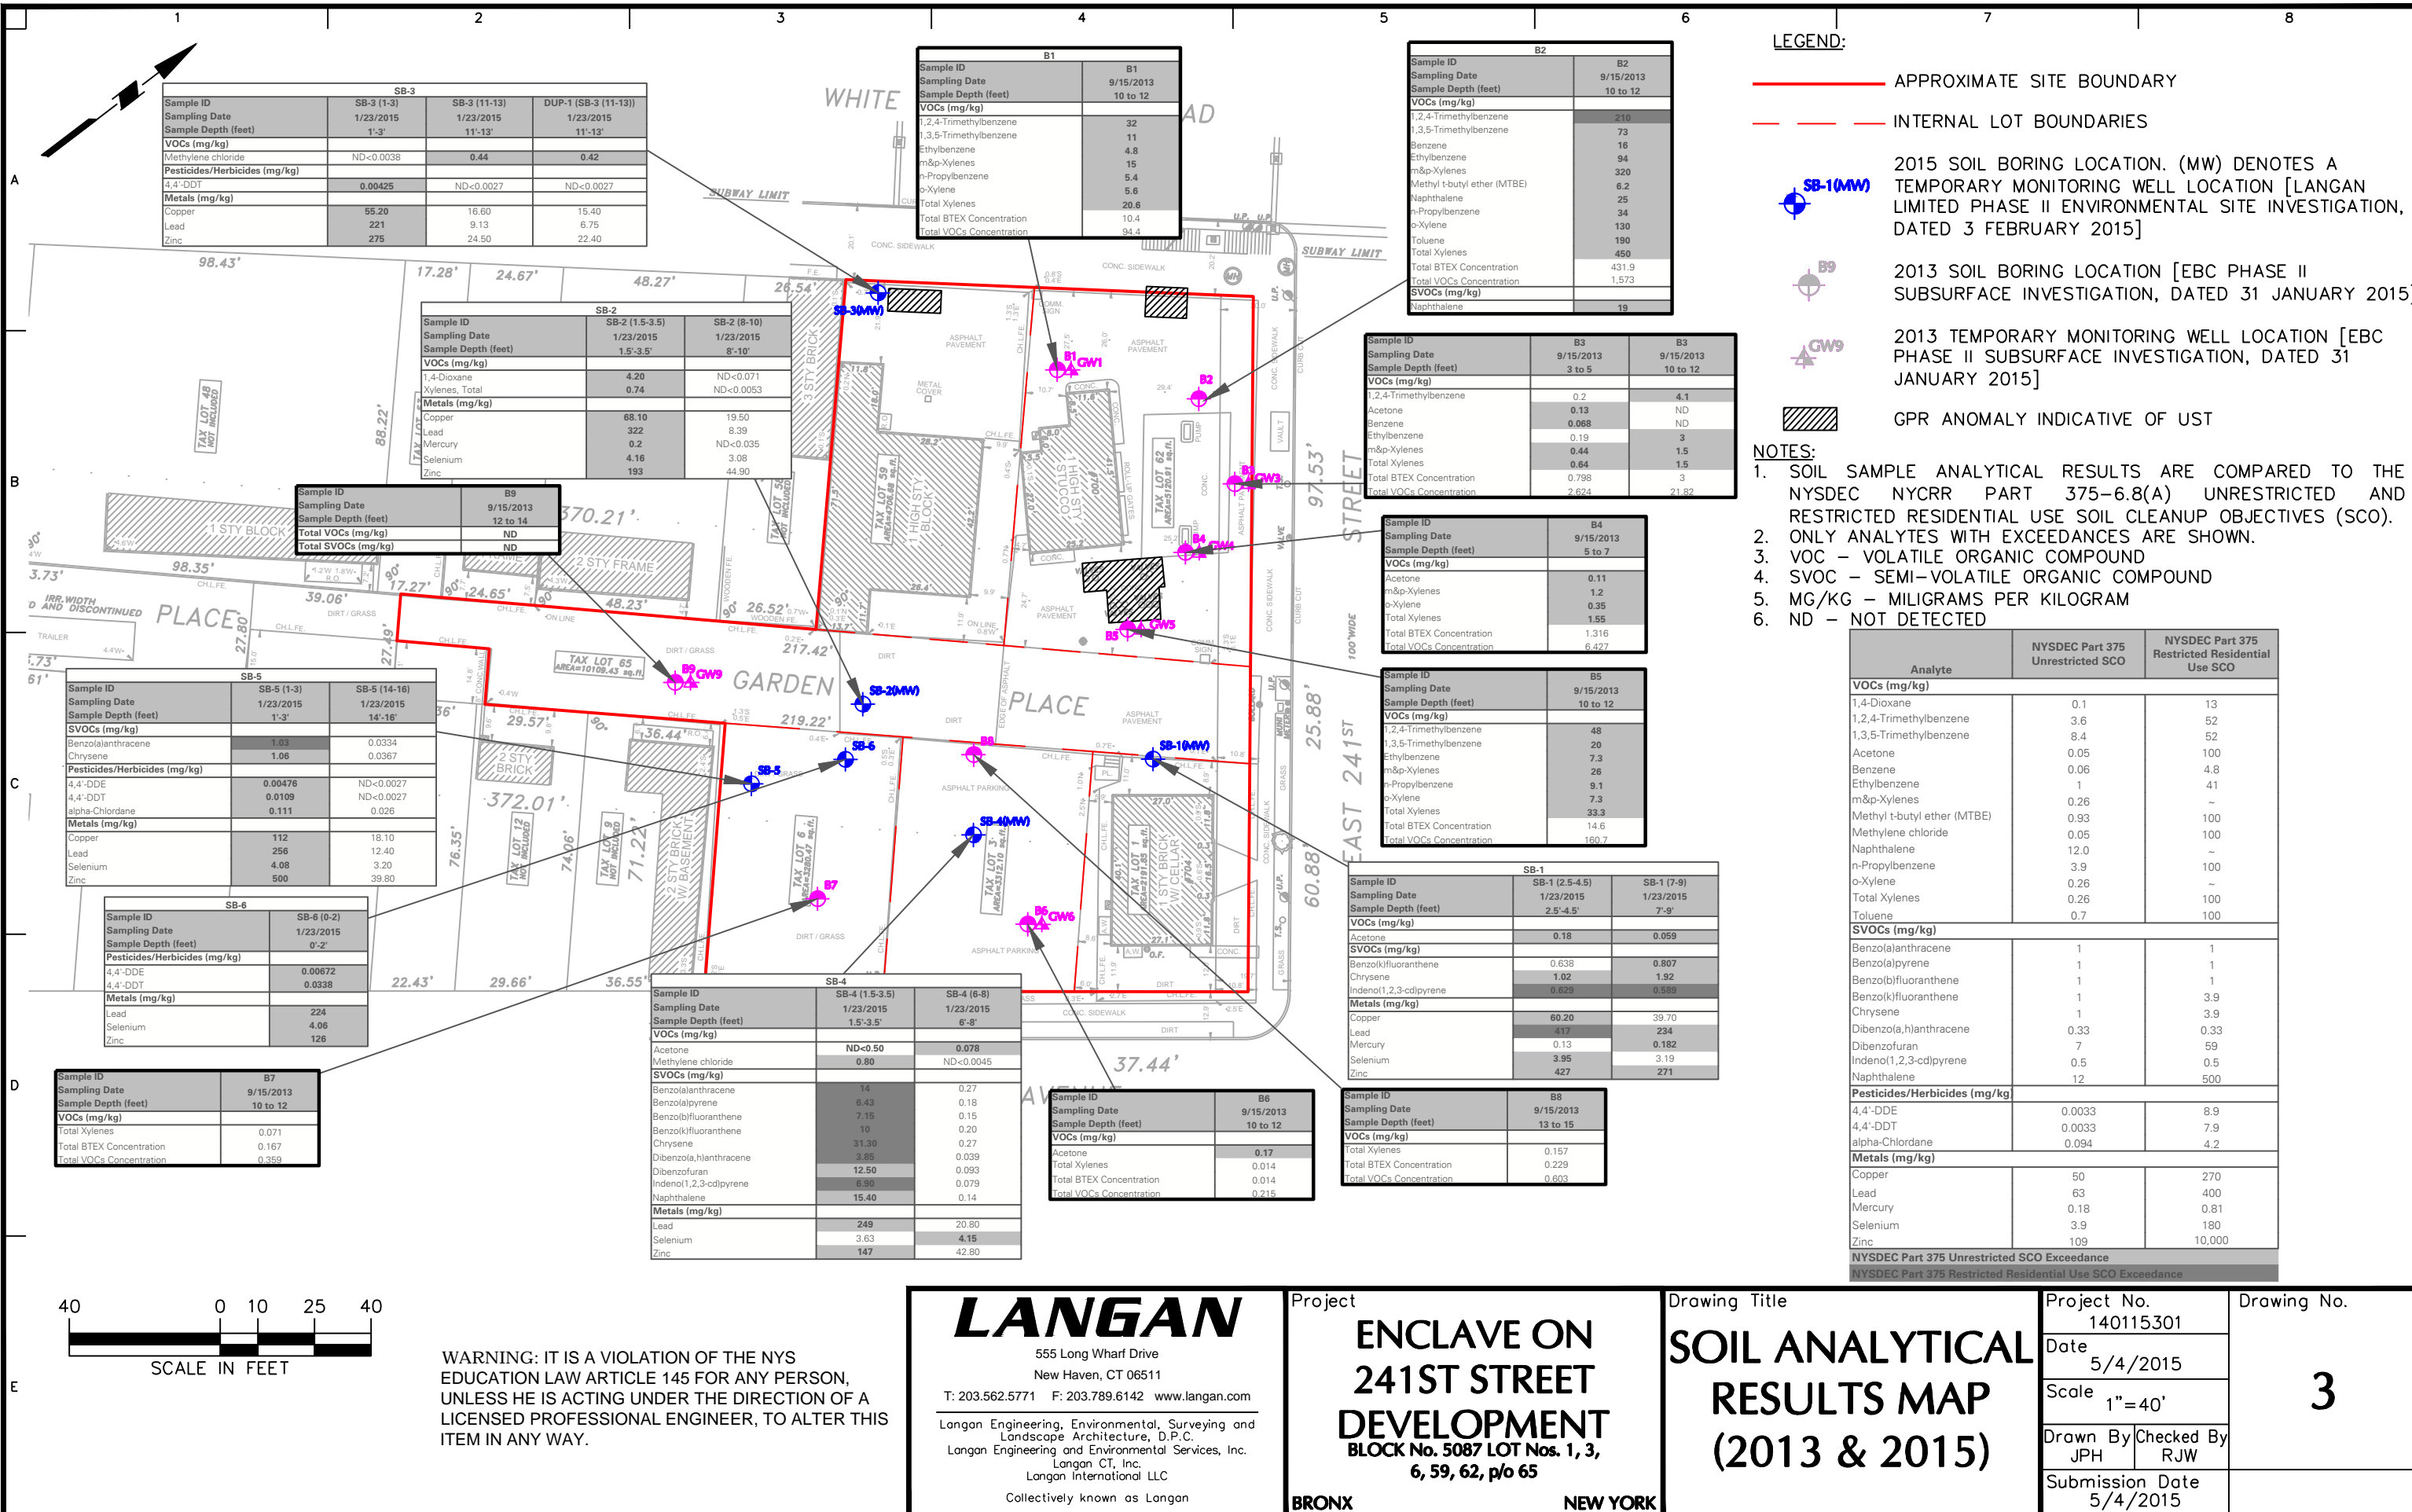

LEGEND:

- APPROXIMATE SITE BOUNDARY
- INTERNAL LOT BOUNDARIES

2015 SOIL BORING LOCATION. (MW) DENOTES A TEMPORARY MONITORING WELL LOCATION [LANGAN LIMITED PHASE II ENVIRONMENTAL SITE INVESTIGATION, DATED 3 FEBRUARY 2015]

2013 SOIL BORING LOCATION [EBC PHASE II SUBSURFACE INVESTIGATION, DATED 31 JANUARY 2015]


2013 TEMPORARY MONITORING WELL LOCATION [EBC PHASE II SUBSURFACE INVESTIGATION, DATED 31 JANUARY 2015]

GPR ANOMALY INDICATIVE OF UST

NOTES:

- SOIL SAMPLE ANALYTICAL RESULTS ARE COMPARED TO THE NYSDEC NYCRR PART 375-6.8(A) UNRESTRICTED AND RESTRICTED RESIDENTIAL USE SOIL CLEANUP OBJECTIVES (SCO).
- ONLY ANALYTES WITH EXCEEDANCES ARE SHOWN.
- VOC - VOLATILE ORGANIC COMPOUND
- SVOC - SEMI-VOLATILE ORGANIC COMPOUND
- MG/KG - MILIGRAMS PER KILOGRAM
- ND - NOT DETECTED

Analyte	NYSDEC Part 375 Unrestricted SCO	NYSDEC Part 375 Restricted Residential Use SCO
VOCs (mg/kg)		
1,4-Dioxane	0.1	13
1,2,4-Trimethylbenzene	3.6	52
1,3,5-Trimethylbenzene	8.4	52
Acetone	0.05	100
Benzene	0.06	4.8
Ethylbenzene	1	41
m&p-Xylenes	0.26	~
Methyl t-butyl ether (MTBE)	0.93	100
Methylene chloride	0.05	100
Naphthalene	12.0	~
n-Propylbenzene	3.9	100
o-Xylene	0.26	~
Total Xylenes	0.26	100
Toluene	0.7	100
SVOCs (mg/kg)		
Benzo(a)anthracene	1	1
Benzo(a)pyrene	1	1
Benzo(b)fluoranthene	1	1
Benzo(k)fluoranthene	1	3.9
Chrysene	1	3.9
Dibenzo(a,h)anthracene	0.33	0.33
Dibenzofuran	7	59
Indeno(1,2,3-cd)pyrene	0.5	0.5
Naphthalene	12	500
Pesticides/Herbicides (mg/kg)		
4,4'-DDE	0.0033	8.9
4,4'-DDT	0.0033	7.9
alpha-Chlordane	0.094	4.2
Metals (mg/kg)		
Copper	50	270
Lead	63	400
Mercury	0.18	0.81
Selenium	3.9	180
Zinc	109	10,000
NYSDEC Part 375 Unrestricted SCO Exceedance		
NYSDEC Part 375 Restricted Residential Use SCO Exceedance		




WARNING: IT IS A VIOLATION OF THE NYS EDUCATION LAW ARTICLE 145 FOR ANY PERSON, UNLESS HE IS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS ITEM IN ANY WAY.

**LANGAN**  
555 Long Wharf Drive  
New Haven, CT 06511  
T: 203.562.5771 F: 203.789.6142 www.langan.com  
Langan Engineering, Environmental, Surveying and Landscape Architecture, D.P.C.  
Langan Engineering and Environmental Services, Inc.  
Langan CT, Inc.  
Langan International LLC  
Collectively known as Langan

Project  
**ENCLAVE ON  
241ST STREET  
DEVELOPMENT**  
BLOCK No. 5087 LOT Nos. 1, 3,  
6, 59, 62, p/o 65  
**BRONX NEW YORK**

Drawing Title  
**SOIL ANALYTICAL  
RESULTS MAP  
(2013 & 2015)**

Project No.  
140115301  
Date  
5/4/2015  
Scale  
1"=40'  
Drawn By  
JPH  
Checked By  
RJW  
Submission Date  
5/4/2015  
Drawing No.  
**3**

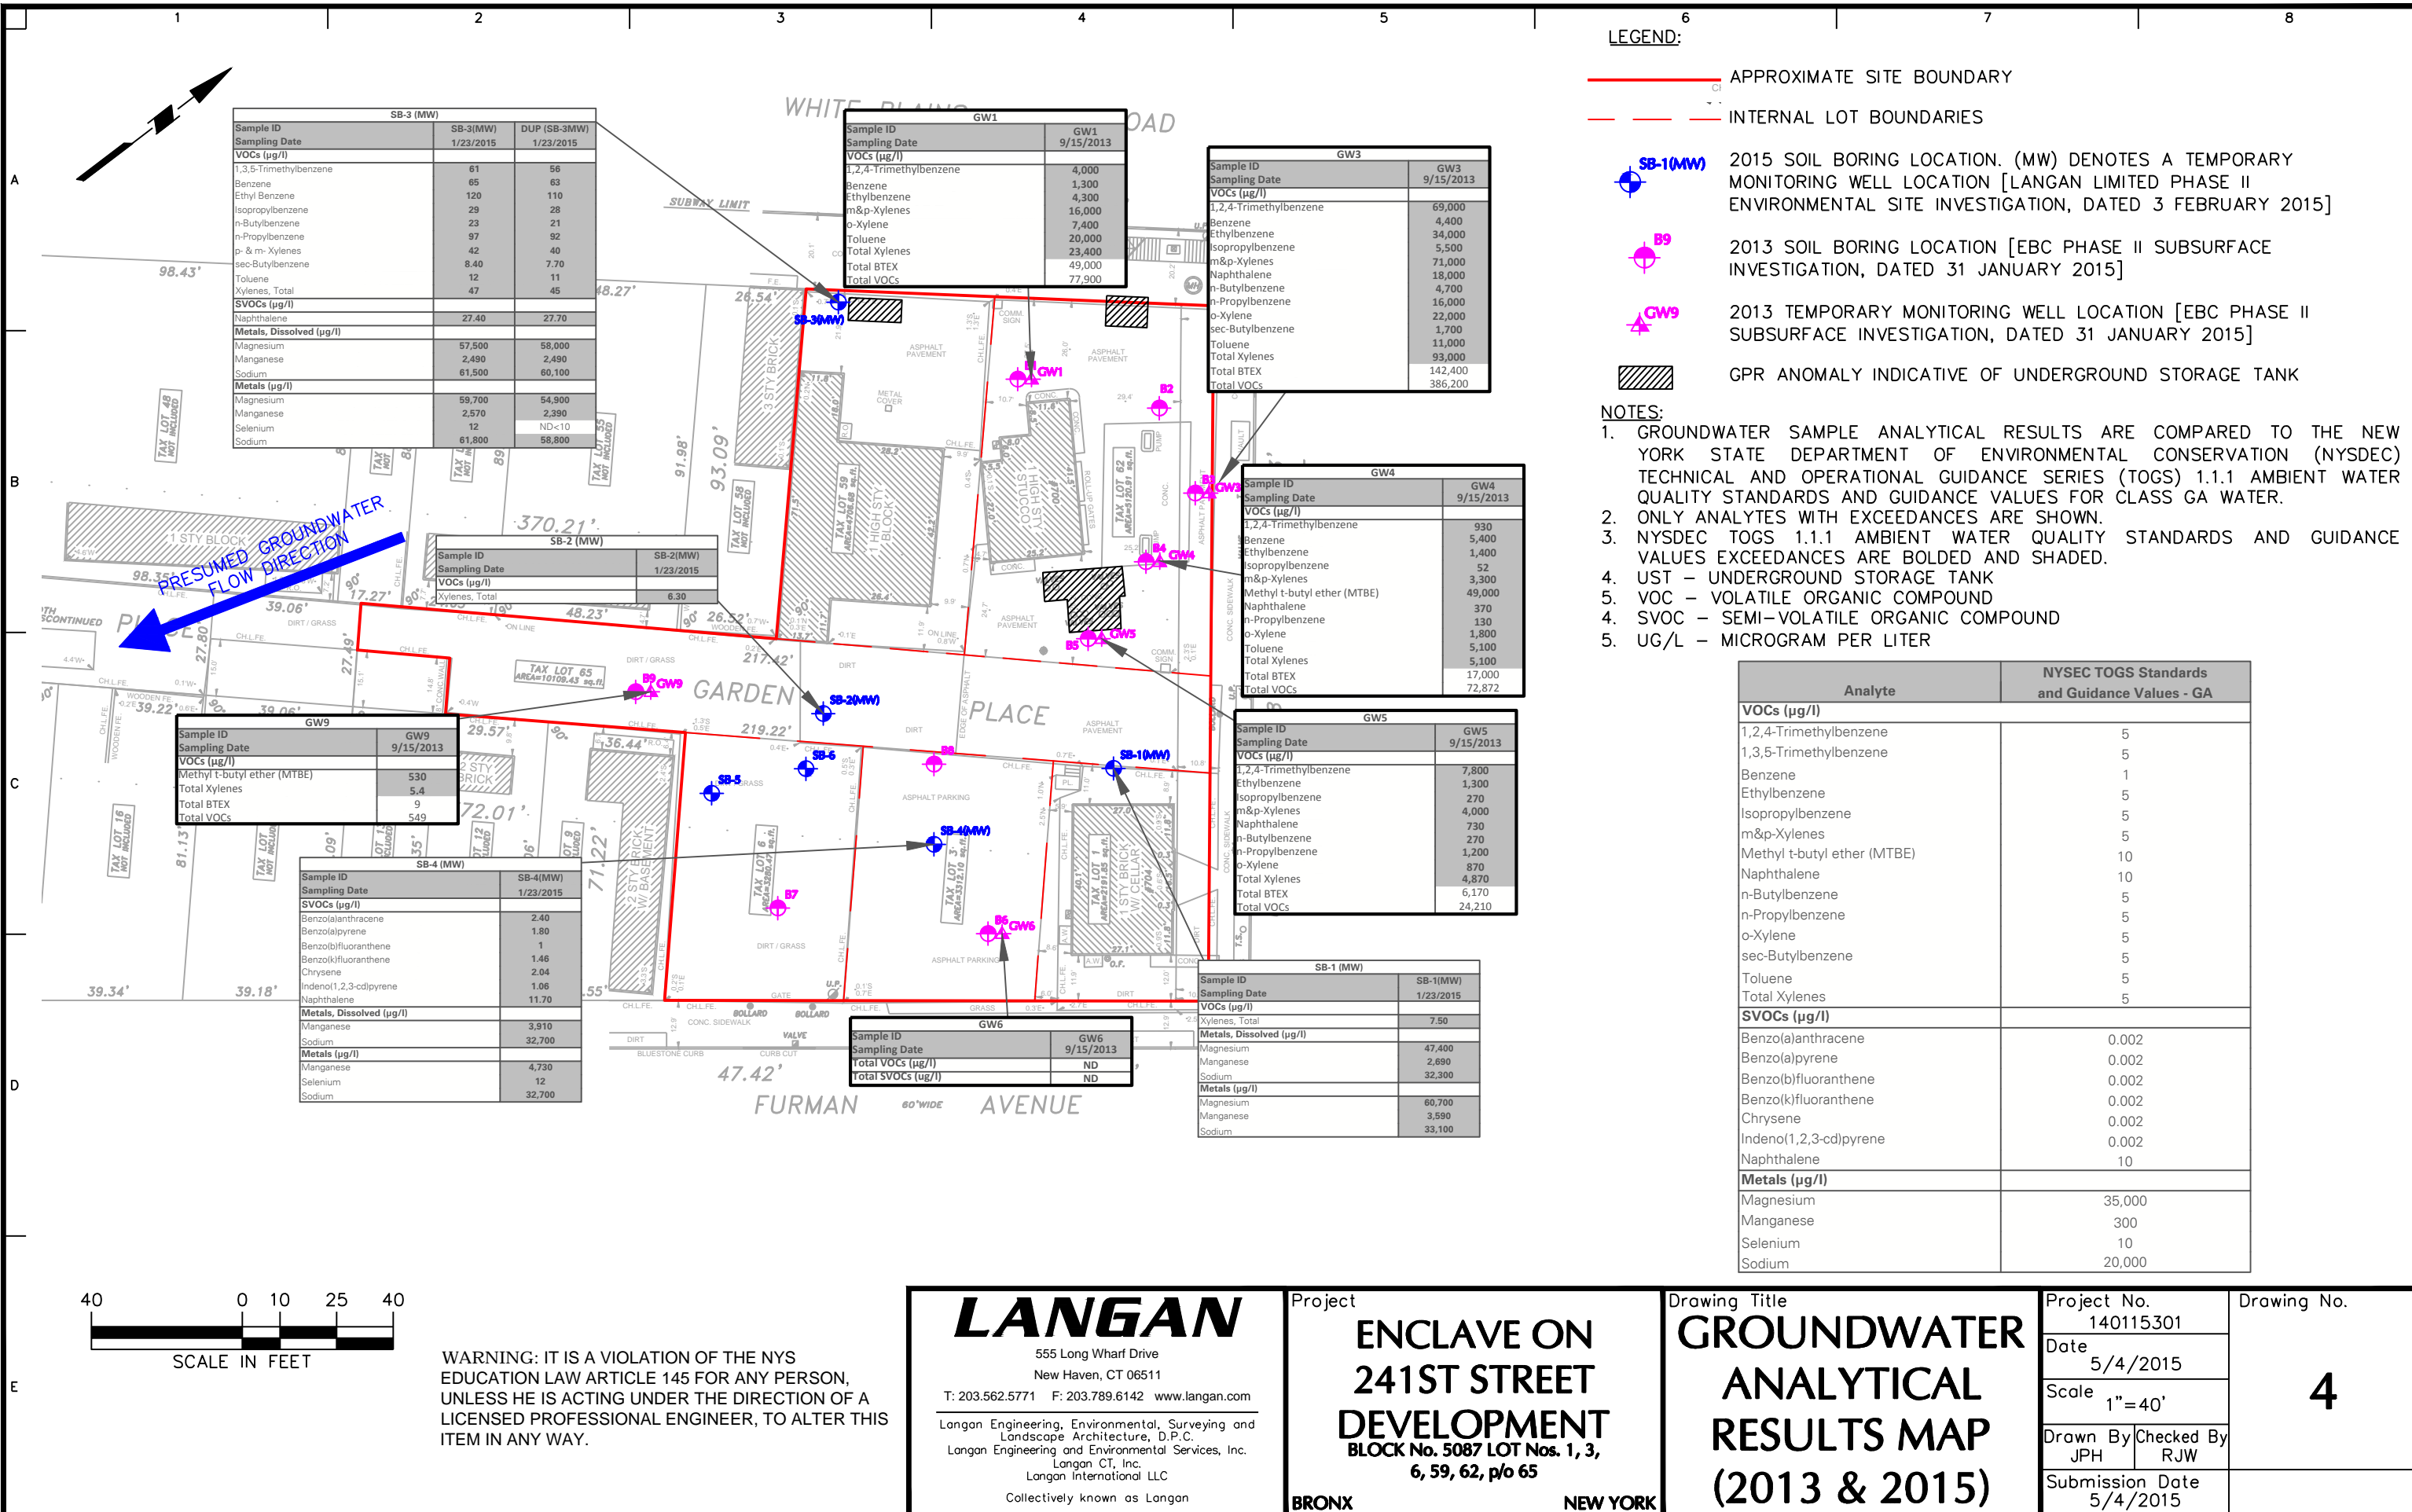

## **APPENDIX A**

### **Previous Environmental Reports (on CD)**

## **APPENDIX B**

### **Health and Safety Plan**

---

---

**HEALTH AND SAFETY PLAN  
714 EAST 241<sup>st</sup> STREET  
BRONX , NEW YORK**

---

---

*Prepared For:*

**Enclave on 241 Street LLC**  
2975 Westchester Avenue, Suite 100  
Purchase, New York 10577

*Prepared By:*

**Langan Engineering, Environmental, Surveying  
and Landscape Architecture, DPC**  
555 Long Wharf Drive  
New Haven, Connecticut 06511

**Jamie P. Barr**  
Senior Associate/Vice President

**February 2015**

**LANGAN**

## **TABLE OF CONTENTS**

<b>HEALTH AND SAFETY PLAN (HASP) SUMMARY .....</b>	<b>1</b>
<b>SECTION 1 INTRODUCTION .....</b>	<b>6</b>
<b>1.1 Purpose and Policy.....</b>	<b>6</b>
<b>1.2 Site Description .....</b>	<b>6</b>
<b>1.3 Scope of Work .....</b>	<b>7</b>
<b>1.4 LANGAN Project Team Organization.....</b>	<b>7</b>
<b>1.5 GENERAL RESPONSIBILITIES OF CONTRACTORS AND SUBCONTRACTORS .....</b>	<b>11</b>
<b>SECTION 2 RISK ANALYSIS.....</b>	<b>12</b>
<b>2.1 Chemical Hazards.....</b>	<b>12</b>
<b>2.2 Radiation Hazards .....</b>	<b>14</b>
<b>2.3 Biological Hazards.....</b>	<b>14</b>
2.3.1 Animals .....	14
2.3.2 Insects .....	14
<b>2.4 Physical Hazards.....</b>	<b>15</b>
2.4.1 Explosion.....	15
2.4.2 Heat Stress.....	15
2.4.3 Cold-Related Illness .....	17
2.4.4 Noise.....	19
2.4.5 Hand and Power Tools .....	19
2.4.6 Slips, Trips and Fall Hazards .....	19
2.4.7 Utilities (Electrocution and Fire Hazards) .....	19
<b>2.5 Task Hazard Analysis .....</b>	<b>19</b>
2.5.1 Soil Borings, Vapor Points, Well Installation and Sampling .....	19
2.5.2 Site Traffic Management.....	20
2.5.3 Chemical Exposure Hazards.....	20
<b>SECTION 3 PERSONNEL PROTECTION AND MONITORING.....</b>	<b>23</b>
<b>3.1 OSHA Training.....</b>	<b>23</b>
<b>3.2 Site-Specific Training .....</b>	<b>23</b>
<b>3.3 Site Security .....</b>	<b>23</b>
<b>3.4 Monitoring Requirements.....</b>	<b>24</b>

<b>3.5 Summary of Action levels and Restrictions .....</b>	<b>24</b>
3.5.1 Level D and Modified Level D .....	25
3.5.2 Level C.....	25
3.5.3 Level B (Retreat) .....	26
3.5.4 OSHA Requirements for Personal Protective Equipment .....	26
<b>SECTION 4 WORK ZONES AND DECONTAMINATION .....</b>	<b>28</b>
<b>4.1 Site Work Zones .....</b>	<b>28</b>
4.1.1 Hot Zone.....	28
4.1.2 Warm Zone.....	28
4.1.3 Cold Zone .....	28
<b>4.2 Decontamination.....</b>	<b>28</b>
4.2.1 Decontamination of Personnel.....	28
4.2.2 Decontamination of Field Equipment.....	29
<b>4.3 Remedial INVESTIGATION-Derived Waste.....</b>	<b>29</b>
<b>SECTION 5 SAMPLE SHIPMENT.....</b>	<b>30</b>
<b>5.1 Non-Hazardous Samples .....</b>	<b>30</b>
5.1.1 Environmental Samples .....	30
<b>5.2 Hazardous Samples.....</b>	<b>31</b>
5.2.1 Shipping Papers.....	32
<b>SECTION 6 ACCIDENT PREVENTION AND CONTINGENCY PLAN .....</b>	<b>33</b>
<b>6.1 Accident Prevention .....</b>	<b>33</b>
6.1.1 Site-Specific Training .....	33
6.1.2 Vehicles and Heavy Equipment .....	33
<b>6.2 Spill Control Plan.....</b>	<b>34</b>
<b>6.3 Contingency Plan .....</b>	<b>34</b>
6.3.1 Emergency Procedures .....	34
6.3.2 Chemical Exposure.....	34
6.3.3 Personal Injury .....	35
6.3.4 Evacuation Procedures .....	35
6.3.5 Procedures Implemented in the Event of a Major Fire, Explosion, or Emergency .....	36
<b>6.4 Community Air Monitoring Plan .....</b>	<b>37</b>
6.4.1 Vapor Emission Response Plan .....	38
6.4.2 Major Vapor Emission.....	38
6.4.3 Major Vapor Emission Response Plan .....	38

## **LIST OF TABLES**

<b>TABLE 0.1</b>	EMERGENCY CONTACTS.....	5
<b>TABLE 0.2</b>	SUMMARY OF ACTION LEVELS AND RESTRICTIONS... ..	6
<b>TABLE 1.1</b>	ON-SITE PERSONNEL AND RESPONSIBILITIES.....	9
<b>TABLE 2.1</b>	RELEVANT PROPERTIES OF VOLATILES (PETROLEUM [GASOLINE, DIESEL, ETC.]), METALS AND SEMIVOLATILES KNOWN OR SUSPECTED AT THE SITE.....	12
<b>TABLE 2.2</b>	SUGGESTED FREQUENCY OF PHYSIOLOGICAL MONITORING FOR FIT AND ACCLIMATED WORKERS.....	21
<b>TABLE 2.3</b>	HEAT INDEX.....	22

## **LIST OF FIGURES**

<b>FIGURE 1</b>	MAP/ROUTE TO HOSPITAL
-----------------	-----------------------

## **LIST OF APPENDICES**

<b>ATTACHMENT A</b>	AIR MONITORING EQUIPMENT CALIBRATION AND MAINTENANCE
<b>ATTACHMENT B</b>	FORMS FOR HEALTH AND SAFETY RELATED ACTIVITIES
<b>ATTACHMENT C</b>	MATERIAL SAFETY DATA SHEETS
<b>ATTACHMENT D</b>	STANDARD SAFE WORK PRACTICES



## **HEALTH AND SAFETY PLAN (HASP) SUMMARY**

### **Emergency Contacts**

Emergency contacts are listed on Table 0.1.

### **Emergency Procedures**

Emergency procedures are described in Section 6.

### **Site Specific Hazards and Training**

Site Specific Hazards are described in Section 2.

The Field Safety Officer (FSO) will be responsible for providing site-specific training to all personnel that work at the site. This training will cover the following topics:

- Names of personnel responsible for site safety and health.
- Hazards potentially present at the site.
- Proper use of personal protective equipment (PPE).
- Work practices by which the employee can minimize risk from hazards.
- Acute effects of compounds at the site.
- Decontamination procedures.

Personnel will be required to sign and date the Site-Specific Training Form provided in Attachment B prior to working on-site.

### **General Health and Safety Requirements**

Personnel will be required to sign and date the HASP and Work Plan Acceptance Form provided in Attachment B prior to working on-site.

### **Personnel Protective Equipment**

**Level D** protection will be worn for initial entry on-site and for all activities except as noted in Section 3. Level D protection will consist of:

- Standard work clothes
- Steel-toe safety boots
- Safety glasses or goggles must be worn when splash hazard is present
- Nitrile outer gloves and polyvinyl chloride (PVC) or nitrile inner gloves must be worn during all sampling activities
- Hard hat (must be worn during all sampling activities)

**Modified Level D** protection may be required under conditions where potential contact of the skin or clothes with significant contamination occurs. Modified Level D is the same as Level D but includes Tyvek coveralls and disposable polyethylene overboots.

**Level C** protection, unless otherwise specified in Section 3, will consist of Level D equipment and the following additional equipment:

- Full-face or half-mask air-purifying respirator (APR)
- Combination dust/organic vapor cartridges
- Tyvek coveralls if particulate hazard present
- PE-Coated Tyvek coverall if liquid contamination present
- PVC or nitrile inner and nitrile outer gloves
- 5-minute escape self-contained breathing apparatus (SCBA)

**Level B** protection, unless otherwise specified in Section 3, will consist of Level D equipment and the following additional equipment:

- Hard hat
- Positive Pressure SCBA or positive pressure air line and respirator with escape SCBA
- PE-Coated Tyvek coverall
- Nitrile outer and PVC or nitrile inner gloves
- Nitrile boot covers

### **Air Monitoring**

A summary of the action levels and restrictions is presented on Table 0.2.

**TABLE 0.1**  
**EMERGENCY CONTACTS**

In the event of any situation or unplanned occurrence requiring assistance, the appropriate contact(s) should be made from the list below. For emergency situations, contact should first be made with the Field Team Leader (or designee) and the Site Safety Officer, who will notify emergency personnel who will then contact the appropriate response teams. This emergency contacts list must be in an easily accessible location at the site.

**Emergency Contacts**

**Phone Number**

Fire Department:	911
Police:	911
New York City-Long Island One Call Center: (3 day notice required for utility markouts)	(800) 272-4480
Poison Control Center:	(800) 222-1222
Pollution Toxic Chemical Oil Spills:	(800) 424-8802

**Medical Emergency**

Ambulance Service:	911
Hospital Name:	Mount Vernon Hospital
Hospital Phone Number:	(914) 664-8000
Hospital Address:	12 North 7 <sup>th</sup> Avenue Mount Vernon, New York 10550
Route to Hospital:	See Page 3 and 4
Travel Time From Site:	±9 minutes

**Langan Contacts**

Project Director:	Jamie. P Barr, L.E.P.	(203) 784-3034
Remediation Engineer:	Joel Landes, P.E.	(212) 479-5404
Project Manager:	Ryan Wohlstrom	(203) 784-3069
Langan Health & Safety Officer:	Tony Moffa	(215) 491-6545
Field Safety Officer:	Dave Granucci	(203) 784-3052
Field Team Leader:	Justin Hall	(203) 640-3180



**TABLE 0.2**  
**SUMMARY OF ACTION LEVELS AND RESTRICTIONS**

**Conditions for Level D:**

All areas

- Photoionization detector (PID) readings < 25 parts per million (ppm) and benzene < 1 ppm
- No visible fugitive dust emissions from site activities

**Conditions for Level C:**

All areas

- Where PID readings > 25 ppm (sustained for 15 minutes in the breathing zone) to 200 ppm and benzene < 5ppm, and/or
- Any visible fugitive dust emissions from site activities that disturb contaminated soil.

**Conditions for Level B (or retreat):**

All areas

- Where PID readings > 200 ppm or benzene > 5 ppm,
- Visible fugitive dust emissions from site activities cloud the surrounding air.

## **SECTION 1 INTRODUCTION**

### **1.1 PURPOSE AND POLICY**

The purpose of this Health and Safety Plan (HASP) is to establish personnel protection standards and mandatory safety practices and procedures for the implementation of a Remedial Investigation Work Plan (RIWP) at the Enclave on 241<sup>st</sup> Street Development Project (the “Site”) in Bronx, New York. The RIWP will include the advancement of 18 soil borings, installation of eight groundwater monitoring wells, installation of eleven soil vapor points, and collection of soil, groundwater, and soil vapor samples. This plan assigns responsibilities, establishes standard operating procedures, and provides for contingencies that may arise while operations are being conducted during sampling and boring and well installation at the site.

The provisions of the plan are mandatory for all on-site personnel. Any supplemental plans used by subcontractors shall conform to this plan at a minimum. All personnel who engage in project activities must be familiar with this plan, comply with its requirements, and sign the Plan Acceptance Form (Attachment B), page number B-5, prior to working on the site. The Plan Acceptance Form must be submitted to the Langan Field Safety Officer (HSO). In addition to this plan, all work shall be performed in accordance with all applicable federal, state and local regulations.

### **1.2 SITE DESCRIPTION**

The Site consists of an approximate 24,060-square-foot irregularly shaped lot and includes approximately 100 feet of frontage along White Plains Road, 185 feet of frontage along 241<sup>st</sup> Street, and 135 feet of frontage along Furman Avenue. The New York City Transit Authority (NYCTA) #2 rail corridor and station platform are allocated above grade along the northwestern property line. A Site Location Map is included as Figure 1. The Site is comprised of lots 1, 3, 6, 59, 62, and p/o 65; however, on 22 December 2014, Enclave on 241 Street LLC submitted an Application for Merger to the NYC Department of Finance Division of Land Records in order to combine the six lots into one. The tentative lot merger was approved on 8 January 2015 and the final lot merger approval is anticipated by 20 February 2015. The Site is comprised of the following addresses and lots:

- 714 East 241st Street (lot 1) – Developed with a vacant one-story office building with a basement.
- 4643 Furman Avenue (lot 3) – Developed with an asphalt-paved parking lot.
- 4641 Furman Avenue (lot 6) – Undeveloped dirt and grass lot.
- 4644 White Plains Road (lot 59) – Developed with a vacant one-story former gasoline station and auto body shop (since circa 1950)

- 700 East 241st Street (lot 62) – Developed with a vacant one-story former gasoline station and auto body shop (since circa 1935)
- 704 East 241st Street (p/o lot 65) – Undeveloped dirt and grass lot.

The Site contains three onsite buildings including an approximate 1,086-square foot one-story office building with basement (former lot 1), an approximate 3,375-square foot one-story former auto body shop building (former lot 59), and an approximate 1,500-square foot one-story former auto body shop building (former lot 62). The Site also contains asphalt- and concrete-paved exterior driving/parking areas and sparsely vegetated undeveloped area. The Site is bordered to the northwest by White Plains Road and an overhead NYCTA rail line, to the northeast by East 241st Street, to the southeast by Furman Avenue, and to the southwest by residential and commercial properties. The Site is subject to NYSDEC review under the Spills Program (Spill No. 12-14956).

### **1.3 SCOPE OF WORK**

A Remedial Investigation will be performed at the Site that consists of advancement of 18 soil borings, installation of eight groundwater monitoring wells, installation of eleven soil vapor points, and collection of soil, groundwater, and soil vapor samples.

A qualified and experienced environmental driller will advance 18 investigative borings based on site areas of concern (AOC) as determined from previous environmental investigations at the Site. A Langan engineer will supervise the Site work, screen the soil samples for environmental impacts, and collect environmental soil samples for laboratory analysis. Soil will be collected continuously to approximately five feet below the groundwater interface. Each sample will be screened for organic vapors with a photoionization detector (PID) and evaluated for visual and olfactory indications of environmental impacts.

Eight of the soil borings will be converted into groundwater monitoring wells. Monitoring wells will be installed to a depth of approximately 15 feet below sidewalk grade by inserting a new two-inch diameter PVC screen and riser into boreholes advanced using a direct-push Geoprobe drill rig. Following completion of the wells, the wells will be gauged for static water levels and each well will be developed by pumping out the groundwater. One groundwater sample from each well will be collected at least one week after development.

Eleven soil vapor samples will be collected from soil vapor points installed to an approximate depth of eight feet below grade.

### **1.4 LANGAN PROJECT TEAM ORGANIZATION**

Table 1.1 describes the responsibilities of Langan on-site personnel associated with this project. The names of principal personnel associated with this project are:

Project Director:	Jamie. P Barr, L.E.P.	(203) 784-3034
Remediation Engineer:	Joel Landes, P.E.	(212) 479-5404
Project Manager:	Ryan Wohlstrom	(203) 784-3069
Langan Health & Safety Officer:	Tony Moffa	(215) 491-6545
Field Safety Officer:	Dave Granucci	(203) 784-3052
Field Team Leader:	Justin Hall	(203) 640-3180

All Langan personnel have been appropriately trained in first aid and hazardous waste safety procedures, including the operating and fitting of personal protective equipment, and are experienced with the field operations planned for this site.



**TABLE 1.1**  
**ON-SITE PERSONNEL AND RESPONSIBILITIES**

---

---

**PROJECT MANAGER** - Assumes control over site activities. Reports to upper-level management. Has authority to direct response operations.

**Responsibilities:**

- Prepares and organizes the background review of the situation, the Work Plans, the Site Health and Safety Plan, and the field team.
- Obtains permission for site access and coordinates activities with appropriate officials.
- Ensures that the Work Plan is executed and on schedule.
- Briefs the field team on their specific assignments.
- Coordinates with the site Health and Safety Officer (HSO) to ensure that health and safety requirements are met.
- Prepares the final report and support files on the response activities.
- Serves as the liaison with public officials.

**FIELD SAFETY OFFICER** - Advises the HSO and Project Manager on aspects of health and safety on site. Stops work if operations threaten worker or public health or safety.

**Responsibilities:**

- Ensures that all necessary Health and Safety Equipment is available on-site. Ensures that all equipment is functional.
- Periodically inspects protective clothing and equipment.
- Ensures that protective clothing and equipment are properly stored and maintained.
- Controls entry and exit at the Access Control Points.
- Coordinates health and safety program activities with the Project HSO.
- Confirms each team member's suitability for work based on a physician's recommendation.
- Monitors the work parties for signs of stress, such as cold exposure, heat stress, and fatigue.
- Implements the Site HASP.
- Conducts periodic inspections to determine if the Site HASP is being followed.
- Enforces the "buddy" system.

- Knows emergency procedures, evacuation routes, and the telephone numbers of the ambulance, local hospital, poison control center, fire department, and police department.
- Notifies, when necessary, local public emergency officials.
- Coordinates emergency medical care.
- Sets up decontamination lines and the decontamination solutions appropriate for the type of chemical contamination on the site.
- Controls the decontamination of all equipment, personnel, and samples from the contaminated areas.
- Assures proper disposal of contaminated clothing and materials.
- Ensures that all required equipment is available.
- Advises medical personnel of potential exposures and consequences.
- Notifies emergency response personnel by telephone or radio in the event of an emergency.

**FIELD TEAM LEADER** - Advises on all aspects of health and safety on site. Stops work if any operation threatens worker or public health or safety. Is directly responsible for the field team and the safety of site operations.

**Responsibilities:**

- Manages field operations.
- Executes the Work Plan and schedule.
- Enforces safety procedures.
- Coordinates with the Site Safety Officer in determining protection level.
- Enforces site control.
- Documents field activities and sample collection.
- Serves as a liaison with public officials.

**WORK TEAM** – Operators, laborers, samplers. The work party must consist of at least two people.

**Responsibilities:**

- Safely completes the on-site tasks required to fulfill the Work Plan.
- Complies with Site Safety Plan.

Notifies Site Safety Officer or supervisor of suspected unsafe condition

## **1.5 GENERAL RESPONSIBILITIES OF CONTRACTORS AND SUBCONTRACTORS**

Other site contractors and subcontractors shall develop and abide by their own HASP, which shall, at minimum adhere to this HASP. Where this HASP excludes provisions pertinent to the contractor's or subcontractor's work (i.e., permit-required confined space entry), they must perform such work under their own health and safety procedures in accordance with the applicable local, state and federal regulations and guidance. The following is a list of the subcontractor's responsibilities.

### **Responsibilities:**

- Ensures their employees are trained in the use of all appropriate personal protective equipment (PPE) for the tasks involved.
- Ensure their employees have received current training in the appropriate levels of 29 CFR 1910.120, Hazardous Waste Operations and Emergency Response (HAZWOPER), where applicable.
- Ensure their employees have been medically cleared and have been fit-tested within the year on the type respirator they will wear, if necessary.
- Have knowledge of, understand, and abide by all current federal, state and local health and safety regulations pertinent to the work on site.
- Safely complete the tasks required to fulfill the Work Plan.
- Notify FSO or supervisor of any hazardous material brought onto the job site; the hazards associated with the material, and must provide MSDS for the material to the FSO.
- Notifies FSO or supervisor of a suspected unsafe condition.
- Ensure that employees have been briefed on their HASP, complies with their HASP and have signed the Compliance Agreement.

## **SECTION 2 RISK ANALYSIS**

### **2.1 CHEMICAL HAZARDS**

The primary potential chemical hazard is exposure to volatile organic compounds (VOCs), semivolatile organic compounds (SVOCs), particularly polynuclear aromatic hydrocarbons (PAHs), and metals. Other compounds that may be encountered are site equipment fuels (gasoline, diesel, etc.) that also contain volatile components. Relevant properties of these compounds are outlined in Table 2.1.

Dust with chemical constituents will not likely be generated during RIWP implementation; regardless, air will be monitored for particulates and organic vapors.

Material Safety Data Sheets (MSDS) for substances that will be used on site are included in Attachment C.

**TABLE 2.1**  
**RELEVANT PROPERTIES OF VOLATILES (PETROLEUM [GASOLINE, DIESEL, ETC.]), PCBS, METALS AND SEMIVOLATILES KNOWN OR SUSPECTED AT THE SITE**

Compound (Synonym)	OSHA PEL		Odor		Vapor Pressure (mmHg)	Physical State	Detectable w/ 10.6 eV Lamp PID (I.P. eV)
	(1)	IDLH (ppm)	LEL (%)	Threshold (ppm)			
Acetone	1000	2500	2.5	20	Fruity. Mint-like. Fragrant. Ethereal	180 Liquid	Yes
Benzene	1	500	1.2	1.5	Sweet	75 Flammable Liquid	Yes
Copper	1	100	NA	NA	NA	1 Non-combustible	NA
Lead (Pb)	0.05	11	NA	NA	NA	0 (approx) Non-combustible Solid	NA
Mercury	0.1	10	NA	NA	NA	0 (approx) Non-combustible	NA
Polychlorinated Biphenyls (PCBs)	0.5 mg/m <sup>3</sup>	5 mg/m <sup>3</sup> (CA)	NA	NA	Mild. Hydrocarbon-like.	0.00006 Nonflammable Solid	No
Polynuclear Aromatic Hydrocarbons (PAHs)*	0.2	80(CA)	Varies	Varies	Varies	Varies Combustible Solid	No
Zinc	5	50	NA	NA	NA	0 (approx) Combustible Solid <sup>(5)</sup>	NA

\*Includes acenaphthene, acenaphthylene, anthracene, benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(g,h,i)perylene, benzo(k)fluoranthene, benzo(j,k)fluoranthene, chrysene, dibenzo(a,h)anthracene, fluorene, indeno(1,2,3-cd)pyrene, naphthalene, phenanthrene

- (1) 29 CFR 1910, June 30, 1993 (8-hour Time weighted average unless otherwise specified.)
  - (2) ACGIH 1989 Highest reported value of acceptable odor threshold range.
  - (3) Slight explosive hazard if dust is exposed to flame
  - (4) Sponge catalyst may ignite spontaneously in the air.
  - (5) Powder may ignite spontaneously in the air, and can continue burning under water.
- [IDLH] Immediately dangerous to life or health  
[CA] Suspect carcinogen - Minimize all possible exposures  
[OSHA PEL] Occupational Safety and Health Administrations – Permissible Exposure Limit  
[LEL] Lower Explosive Limit

## **2.2 RADIATION HAZARDS**

No radiation hazards are known or expected at the site.

## **2.3 BIOLOGICAL HAZARDS**

### **2.3.1 Animals**

During site operations, animals such as dogs, pigeons, sea gulls, mice, and rats may be encountered. Workers will use discretion and avoid all contact with animals. Bites and scratches from dogs can be painful and if the animal is rabid, the potential for contracting rabies exists. Contact with rat and mice droppings may lead to contracting hantavirus. Inhalation of dried pigeon droppings may lead to psittacosis; cryptococcosis and histoplasmosis are also diseases associated with exposure to dried bird droppings but these are less likely to occur in this occupational setting.

### **2.3.2 Insects**

Insects, including bees, wasps, hornets, mosquitoes, and spiders, may be present at this site. Some individuals may have a severe allergic reaction to an insect bite or sting that can result in a life threatening condition. In addition, mosquito bites may lead to St. Louis encephalitis or West Nile encephalitis. Personnel that have been bitten or stung by an insect at the Site should notify the HSO or FSO of such immediately. The following is a list of preventive measures:

- Apply insect repellent prior to fieldwork and or as often as needed throughout the shift.
- Wear proper protective clothing (work boots, socks and light colored pants).
- When walking in wooded areas, to the extent possible avoid contact with bushes, tall grass, or brush.
- Field personnel who may have insect allergies (e.g., bee sting) should provide this information to the HSO or FSO prior to commencing work, and will have allergy medication on Site.
- The HSO or FSO will instruct the project personnel in the recognition and procedures for encountering potentially hazardous insects at the Site.

Lyme disease is caused by infection from a deer tick that carries a spirochete. During the painless tick bite, the spirochete may be transmitted into the bloodstream, which could lead to the worker contracting Lyme disease. This flu like illness occurs out of season, commonly happening between May and October when ticks are more active. Symptoms can include a stiff neck, chills, fever, sore throat, headache, fatigue and joint

pain. Early signs may include an expanding skin rash and joint pain. If left untreated, Lyme disease can cause serious nerve or heart problems as well as a disabling type of arthritis. If personnel feel sick or have signs similar to those above, they should notify the HSO or FSO immediately.

It is recommended that personnel check themselves when in areas that could harbor deer ticks, wear light color clothing and visually check themselves and their buddy when coming from wooded or vegetation covered areas. If a tick is found biting an individual, the HSO or FSO should be contacted immediately. The tick can be removed by pulling gently at the head with tweezers. The affected area should then be disinfected with an antiseptic wipe.

## **2.4 PHYSICAL HAZARDS**

### **2.4.1 Explosion**

No explosion hazards are expected for the scope of work at this site.

### **2.4.2 Heat Stress**

The use of Level C protective equipment, or greater, may create heat stress. Monitoring of personnel wearing personal protective clothing should commence when the ambient temperature is 72°F or above. Table 2.2 presents the suggested frequency for such monitoring. Monitoring frequency should increase as ambient temperature increases or as slow recovery rates are observed. Refer to the Table 2.3 below to assist in assessing when the risk for heat related illness is likely. To use this table, the ambient temperature and relative humidity must be obtained (a regional weather report should suffice). Heat stress monitoring should be performed by the Field Safety Officer, who shall be able to recognize symptoms related to heat stress.

To monitor the workers, be familiar with the following heat-related disorders and their symptoms:

- **Prickly Heat** (Heat rash)
  - Painful, itchy red rash. Occurs during sweating, on skin covered by clothing.
- **Heat Cramps**
  - Painful spasm of arm, leg or abdominal muscles, during or after work.
- **Heat Exhaustion**
  - Headache, nausea, dizziness. Cool, clammy, moist skin. Heavy sweating. Weak, fast pulse. Shallow respiration, normal temperature.

- **Heat Fatigue**
  - Weariness, irritability, loss of skill for fine or precision work. Decreased ability to concentrate. No loss of temperature control.
- **Heat Syncope** (Heat Collapse)
  - Fainting while standing in a hot environment.
- **Heat Stroke**
  - Headache, nausea, weakness, hot dry skin, fever, rapid strong pulse, rapid deep respirations, loss of consciousness, convulsions, coma. **This is a life threatening condition.**

Do not permit a worker to wear a semi-permeable or impermeable garment when they are showing signs or symptoms of heat-related illness.

To monitor the worker, measure:

- Heart rate. Count the radial pulse during a 30-second period as early as possible in the rest period.
  - If the heart rate exceeds 100 beats per minute at the beginning of the rest period, shorten the next work cycle by one-third and keep the rest period the same.
  - If the heart rate still exceeds 100 beats per minute at the next rest period, shorten the following work cycle by one-third. A worker cannot return to work after a rest period until their heart rate is below 100 beats per minute.
- Oral temperature. Use a clinical thermometer (3 minutes under the tongue) or similar device to measure the oral temperature at the end of the work period (before drinking).
  - If oral temperature exceeds 99.6°F (37.6°C), shorten the next work cycle by one-third without changing the rest period. A worker cannot return to work after a rest period until their oral temperature is below 99.6°F.
  - If oral temperature still exceeds 99.6°F (37.6°C) at the beginning of the next rest period, shorten the following cycle by one-third.
  - Do not permit a worker to wear a semi-permeable or impermeable garment when oral temperature exceeds 100.6°F (38.1°C).



**Prevention of Heat Stress** - Proper training and preventative measures will aid in averting loss of worker productivity and serious illness. Heat stress prevention is particularly important because once a person suffers from heat stroke or heat exhaustion, that person may be predisposed to additional heat related illness. To avoid heat stress the following steps should be taken:

- Adjust work schedules.
- Mandate work slowdowns as needed.
- Perform work during cooler hours of the day if possible or at night if adequate lighting can be provided.
- Provide shelter (air-conditioned, if possible) or shaded areas to protect personnel during rest periods.
- Maintain worker's body fluids at normal levels. This is necessary to ensure that the cardiovascular system functions adequately. Daily fluid intake must approximately equal the amount of water lost in sweat, i.e., eight fluid ounces (0.23 liters) of water must be ingested for approximately every eight ounces (0.23 kg) of weight lost. The normal thirst mechanism is not sensitive enough to ensure that enough water will be drunk to replace lost sweat. When heavy sweating occurs, encourage the worker to drink more. The following strategies may be useful:
  - Maintain water temperature 50° to 60°F (10° to 16.6°C).
  - Provide small disposal cups that hold about four ounces (0.1 liter).
  - Have workers drink 16 ounces (0.5 liters) of fluid (preferably water or dilute drinks) before beginning work.
  - Urge workers to drink a cup or two every 15 to 20 minutes, or at each monitoring break. A total of 1 to 1.6 gallons (4 to 6 liters) of fluid per day are recommended, but more may be necessary to maintain body weight.
  - Train workers to recognize the symptoms of heat related illness.

### **2.4.3 Cold-Related Illness**

If work on this project begins in the winter months, thermal injury due to cold exposure can become a problem for field personnel. Systemic cold exposure is referred to as hypothermia. Local cold exposure is generally called frostbite.

**Hypothermia** - Hypothermia is defined as a decrease in the patient core temperature below 96°F. The body temperature is normally maintained by a combination of central (brain and spinal cord) and peripheral (skin and muscle) activity. Interference with any of these mechanisms can result in hypothermia, even in the absence of what normally is considered a "cold" ambient temperature. Symptoms of hypothermia include: shivering, apathy, listlessness, sleepiness, and unconsciousness.

**Frostbite** - Frostbite is both a general and medical term given to areas of local cold injury. Unlike systemic hypothermia, frostbite rarely occurs unless the ambient temperatures are less than freezing and usually less than 20°F. Symptoms of frostbite are: a sudden blanching or whitening of the skin; the skin has a waxy or white appearance and is firm to the touch; tissues are cold, pale, and solid.

**Prevention of Cold-Related Illness** - To prevent cold-related illness:

- Educate workers to recognize the symptoms of frostbite and hypothermia
- Identify and limit known risk factors:
- Assure the availability of enclosed, heated environment on or adjacent to the site.
- Assure the availability of dry changes of clothing.
- Assure the availability of warm drinks.
- Start (oral) temperature recording at the job site:
  - At the FSO or Field Team Leader's discretion when suspicion is based on changes in a worker's performance or mental status.
  - At a worker's request.
  - As a screening measure, two times per shift, under unusually hazardous conditions (e.g., wind-chill less than 20°F, or wind-chill less than 30°F with precipitation).
  - As a screening measure whenever any one worker on the site develops hypothermia.

Any person developing moderate hypothermia (a core temperature of 92°F) cannot return to work for 48 hours.

#### **2.4.4 Noise**

The operation of drilling equipment may result in momentary high noise levels during advancement of soil borings. Hearing protection (e.g., ear plugs, headphones) will be used as necessary.

#### **2.4.5 Hand and Power Tools**

In order to adjust drilling equipment and sever PVC riser, personnel will utilize hand and/or power tools. The use of hand and power tools can present a variety of hazards, including physical harm from being struck by flying objects, being cut or struck by the tool, fire, and electrocution. Ground Fault Circuit Interrupters (GFCIs) are required for power tools.

#### **2.4.6 Slips, Trips and Fall Hazards**

Care should be exercised when walking at the site, especially when carrying equipment. The presence of surface debris, uneven surfaces, pits, facility equipment, and soil piles contribute to tripping hazards and fall hazards. To the extent possible, all hazards should be identified and marked on the Site, with hazards communicated to all workers in the area.

#### **2.4.7 Utilities (Electrocution and Fire Hazards)**

The possibility of encountering underground utilities poses fire, explosion, and electrocution hazards. All intrusive work will be preceded by notification of the subsurface work to the N.Y. One Call Center. Potential adverse effects of electrical hazards include burns and electrocution, which could result in death.

### **2.5 TASK HAZARD ANALYSIS**

The following hazards are associated with RIWP activities (e.g., soil borings, well installation, sampling):

- Heavy machinery/equipment (impact hazard to on-foot workers and public)
- Uneven land surface (slip and trip hazard)
- Contaminated media (chemical exposure hazard)

#### **2.5.1 Soil Borings, Vapor Points, Well Installation and Sampling**

Operation of drilling equipment and advancement of soil borings and vapor points is inherently dangerous. Mechanical and electrical field equipment should be properly inspected for defects, and the location of any underground utilities should be established and communicated to all on-site personnel prior to advancement of soil borings.

### **2.5.2 Site Traffic Management**

Site traffic will be controlled through designated points of access along 42nd Road. Access points will be continuously monitored and a flagging system will be used to protect workers, pedestrians and authorized guests. Traffic will also adhere to applicable local, state and federal law.

### **2.5.3 Chemical Exposure Hazards**

Chemical exposure may occur as workers encounter soil and groundwater across the site, or are exposed to products used at the Site including gasoline, diesel, and motor oil. Soil and groundwater sampling presents similar potential exposure hazard. Activities will be conducted initially in Level D but may be upgraded to Modified Level D. Although not anticipated, there will be a Level C and B contingency should pockets of contaminants be brought to the surface and breathing zone air becomes contaminated.

If evidence of historic or unknown contamination is encountered during remediation activities or other contaminated materials, such as oily materials, high PID readings, etc., the FSO will make a determination of the appropriate level of personnel protection.

**Table 2.2**  
**Suggested Frequency of Physiological Monitoring**  
**For Fit and Acclimated Workers<sup>a</sup>**

<b>Adjusted Temperature<sup>b</sup></b>	<b>Normal Work Ensemble<sup>c</sup></b>	<b>Impermeable Ensemble</b>
90°F or above (32.2°C) or above	After each 45 min. of work	After each 15 min. of work
87.5°F (30.8°-32.2°C)	After each 60 min. of work	After each 30 min. of work
82.5°-87.5°F (28.1°-30.8°C)	After each 90 min. of work	After each 60 min. of work
77.5°-82.5°F (25.3°-28.1°C)	After each 120 min. of work	After each 90 min. of work
72.5°-77.5°F (22.5°-25.3°C)	After each 150 min. of work	After each 120 min. of work

a For work levels of 250 kilocalories/hour.

b Calculate the adjusted air temperature (ta adj) by using this equation:  $ta\ adj\ ^\circ F = ta\ ^\circ F + (13 \times \% \text{ sunshine})$ . Measure air temperature (ta) with a standard mercury-in-glass thermometer, with the bulb shielded from radiant heat. Estimate percent sunshine by judging what percent time the sun is not covered by clouds that are thick enough to produce a shadow. (100 percent sunshine = no cloud cover and a sharp, distinct shadow; 0 percent sunshine = no shadows.)

c A normal work ensemble consists of cotton coveralls or other cotton clothing with long sleeves and pants.

## Table 2.3 - HEAT INDEX

ENVIRONMENTAL TEMPERATURE (Fahrenheit)											
	70	75	80	85	90	95	100	105	110	115	120
RELATIVE HUMIDITY	APPARENT TEMPERATURE*										
0%	64	69	73	78	83	87	91	95	99	103	107
10%	65	70	75	80	85	90	95	100	105	111	116
20%	66	72	77	82	87	93	99	105	112	120	130
30%	67	73	78	84	90	96	104	113	123	135	148
40%	68	74	79	86	93	101	110	123	137	151	
50%	69	75	81	88	96	107	120	135	150		
60%	70	76	82	90	100	114	132	149			
70%	70	77	85	93	106	124	144				
80%	71	78	86	97	113	136					
90%	71	79	88	102	122						
100%	72	80	91	108							
*Combined Index of Heat and Humidity...what it "feels like" to the body											
Source: National Oceanic and Atmospheric Administration											
How to use Heat Index:											
1. Across top locate Environmental Temperature						Apparent Temperature		Heat Stress Risk with Physical Activity and/or Prolonged Exposure			
2. Down left side locate Relative Humidity											
3. Follow across and down to find Apparent Temperature						90-105		Heat Cramps or Heat Exhaustion Possible			
4. Determine Heat Stress Risk on chart at right											
						105-130		Heat Cramps or Heat Exhaustion Likely, Heat Stroke Possible			
Note: Exposure to full sunshine can increase Heat Index values by up to 15 degrees F.						>130		Heatstroke Highly Likely			

## **SECTION 3 PERSONNEL PROTECTION AND MONITORING**

### **3.1 OSHA TRAINING**

All on-site personnel who will be actively involved in boring, test pitting, and sampling activities and can potentially encounter hazardous waste must have completed hazardous waste operations-related training, as required by OSHA Regulations 29 CFR 1910.120. Personnel who completed this training more than 12 months prior to the start of the project must have completed an 8-hour refresher course within the past 12 months. Documentation of OSHA training for project personnel must be provided to Langan prior to starting work.

### **3.2 SITE-SPECIFIC TRAINING**

The Field Safety Officer will be responsible for developing a site-specific occupational hazard training program and providing training to all personnel that are to work at the site. This training will be conducted prior to starting field work and will consist of the following topics:

- Names of personnel responsible for site safety and health.
- Hazards potentially present at the site.
- Proper use of personal protective equipment.
- Requirements of this HASP.
- Work practices by which the employee can minimize risk from hazards. This may include a specific review of heavy equipment safety, safety during inclement weather, changes in common escape rendezvous point, site security measures, or other site-specific issues that need to be addressed before work begins.
- Safe use of engineering controls and equipment on the site.
- Acute effects of compounds present at the site.
- Decontamination procedures.

Upon completion of site-specific training, workers will sign the Site-Specific-Training Form provided in Attachment B. A copy of the completed Site-Specific Training Form will be included in the project files for future reference.

### **3.3 SITE SECURITY**

No unauthorized personnel shall be permitted access to the work areas. The site perimeter will be secured with gated, signed, plywood fencing with one point of entry in

accordance with NYCDOB and NYCDOT permits and requirements. The purpose of the fencing is to limit site access to authorized personnel, protect pedestrians from site activities, and maintain site security.

### **3.4 MONITORING REQUIREMENTS**

Worker air monitoring and community air monitoring (as described in Section 6.4) will be conducted at the start of field work.

Fugitive dust generation that could affect site workers, site occupants, or the public may occur. Care will be taken to minimize dust generation. The FSO will visually monitor the perimeter of the work area for evidence of sustained visible emissions. Work activities will be suspended until dust levels diminish to an acceptable level if sustained emissions are observed.

Air monitoring of the breathing zone will be conducted periodically or continuously during boring advancement, sampling activities tank removal, and excavation to assure proper health and safety protection.

VOCs will be monitored with a PID in accordance with the HASP with an action level of 25 ppm in the absence of benzene. If the action level is exceeded and adequate ventilation cannot be provided, work will cease and the potential affected portion of the work area will be evacuated until adequate mechanical ventilation can be setup to control the hazard. Level C respiratory protection may be donned in accordance with the HASP if untrained personnel are not present and the action level is exceeded.

If air monitoring during operations identifies the presence of volatile organic compounds (not anticipated because of natural ventilation), the action levels, permissible exposure, engineering controls, and personal protective equipment specified in this HASP will be implemented. A PID (MiniRAE 2000 or equivalent) will be used to monitor for organic vapors in the breathing zone and to screen soil samples. Air monitoring results will be recorded in the field book during investigation activities and made available for review.

### **3.5 SUMMARY OF ACTION LEVELS AND RESTRICTIONS**

A PID, such as the RAE Systems MiniRAE 2000 equipped with a 10.6 eV lamp, shall be used to screen for total organic vapors. All readings pertain to sustained readings for 15 minutes in the worker breathing zone. The following conditions shall apply to each level of protection.

#### **Conditions for Level D:**

All areas

- PID readings < 25 ppm and benzene < 1 ppm



- No visible fugitive dust emissions from site activities

**Conditions for Level C:**

All areas

- Where PID readings > 25 ppm (sustained for 15 minutes in the breathing zone) to 200 ppm and benzene < 5ppm, and/or
- Any visible fugitive dust emissions from site activities that disturb contaminated soil.

**Conditions for Level B (or retreat):**

All areas

- Where PID readings > 500 ppm or benzene > 25 ppm,
- Visible fugitive dust emissions from site activities cloud the surrounding air.

### **3.5.1 Level D and Modified Level D**

Level D protection will be worn for initial entry on-site and initially for all activities. Level D protection will consist of:

- Standard work clothes
- Steel-toe safety boots
- Safety glasses (goggles must be worn when splash hazard is present)
- Nitrile outer gloves and PVC inner gloves must be worn during all activities requiring contact with soils.
- Hard hat (must be worn during all site activities)

Modified Level D is the same as Level D but includes Tyvek coveralls and disposable polyethylene overboots to contact with the skin or clothes if significant contamination is present in subsurface materials.

### **3.5.2 Level C**

The level of personal protection will be upgraded to Level C if the concentration of volatile organic compounds which can be detected with a PID in the breathing zone equals or exceeds the specified action limits and the contaminants of concern have characteristic warning properties appropriate for air purifying respirators (e.g. taste, odor). Level C protection will consist of the following equipment:

- Full-face or half-mask air-purifying respirator (APR) or powered air purifier (PAPR), depending on presence and abundance of airborne toxic constituents of concern
- Combination high efficiency particulate air (HEPA) filter/organic vapor cartridges
- Tyvek coveralls must be worn if particulate hazard present
- PE-coated Tyvek coveralls if liquid contamination present
- Steel-toe safety boots
- Nitrile outer gloves and PVC inner gloves must be worn during all activities requiring contact with soils.
- Hard hat (must be worn during all site activities)

Cartridges will be disposed at the end of each day's use.

### **3.5.3 Level B (Retreat)**

If the concentration of volatile organics which can be detected with a PID equals or exceeds the specified action levels, all field personnel associated with the project will immediately retreat to a location up-wind of the source of contamination. At this point the Site Safety Officer must consult with the Langan HSO to discuss appropriate actions.

### **3.5.4 OSHA Requirements for Personal Protective Equipment**

All personal protective equipment used during the course of this field investigation must meet the following OSHA standards:

<b>Type of Protection</b>	<b>Regulation</b>	<b>Source</b>
Eye and Face	29 CFR 1910.133 29 CFR 1926.102	ANSI Z87.1-1968
Respiratory	29 CFR 1910.134 29 CFR 1926.103	ANSI Z88.1-1980
Head	29 CFR 1910.135 29 CFR 1926.100	ANSI Z89.1-1969
Foot	29 CFR 1910.136 29 CFR 1926.96	ANSI Z41.1-1967

ANSI = American National Standards Institute

Both the respirator and cartridges specified for use in Level C protection must be fit-tested prior to use in accordance with OSHA regulations (29 CFR 1910.1025; 29 CFR 1910.134).

Based on performance criteria, air purifying respirators cannot be worn under the following conditions:

- Oxygen deficiency;
- IDLH concentrations;
- High relative humidity; and
- If contaminant levels exceed designated use concentrations.

## **SECTION 4 WORK ZONES AND DECONTAMINATION**

### **4.1 SITE WORK ZONES**

Work zones will be established if hazardous materials are encountered.

#### **4.1.1 Hot Zone**

Hot zones will be established within a 25 foot radius around each intrusive activity, where possible. Barriers will be established at the perimeter of the activity area where the perimeter is shared with an area accessible to the public. Unprotected onlookers should be located 25 feet upwind of the activities. All personnel within the hot zone must don the appropriate levels of personal protection as set forth by the FSO. It is not anticipated that Level C or higher will be required for this site.

All personnel within the hot zone will be required to use the specified level of protection. No food, drink, or smoking will be allowed in the hot or warm zones.

#### **4.1.2 Warm Zone**

A warm zone will be established and utilized during the field activities. This zone will be established between the hot zone and the cold zone (discussed below), and will include the personnel and equipment necessary for decontamination of equipment and personnel exiting the hot zone. Personnel and equipment in the hot zone must pass through this zone before entering the cold zone. This zone should always be located upwind of the hot zone.

#### **4.1.3 Cold Zone**

The cold zone will include the remaining areas of the job site. Break areas and support facilities (include equipment storage and maintenance areas) will be located in this zone. No equipment or personnel will be permitted to enter the cold zone from the hot zone without passing through the decontamination station in the warm zone. Eating, smoking, and drinking will be allowed only in this area.

### **4.2 DECONTAMINATION**

Generally, any water used in decontamination procedures will be placed in containers, temporarily stored on-site, and properly characterized and disposed.

#### **4.2.1 Decontamination of Personnel**

Decontamination of personnel will be necessary if Level C or Level B protection is used, which is not anticipated based on current knowledge of the Site history. Decontamination will not be necessary if only Level D protection is used. However, disposable gloves used during sampling activities should be removed and bagged;

personnel should be encouraged to remove clothing and shower as soon as is practicable at the end of the day. All clothing should be machine-washed. All personnel will wash hands and face prior to eating and before and after using the restroom.

#### **4.2.2 Decontamination of Field Equipment**

Decontamination of field equipment will be necessary for all equipment in contact with contaminated materials. Decontamination activities shall be performed in a designated area lined with polyethylene sheeting that is designed to collect the decontamination rinsate.

#### **4.3 REMEDIAL INVESTIGATION-DERIVED WASTE**

All personal protective equipment (PPE)-related remedial investigation-derived waste materials (PPE, decontamination waste) will be placed in labeled containers and appropriately disposed.

## **SECTION 5    SAMPLE SHIPMENT**

### **5.1 NON-HAZARDOUS SAMPLES**

Samples collected in this study will be classified as environmental samples.

#### **5.1.1 Environmental Samples**

In general, non-hazardous environmental samples that are collected from soils or wells are not expected to contain high levels of hazardous materials, and are submitted for environmental testing.

Sample containers must have a completed sample identification tag and the outside container must be marked "Environmental Sample". The sample tag will be legibly written and completed with an indelible pencil or waterproof ink. The information will also be recorded in a log book. At a minimum, it will include:

- Exact location of sample;
- Time and date sample was collected;
- Name of sampler witnesses (if necessary);
- Project codes, sample station number, and identifying code (if applicable);
- Type of sample (if known);
- Laboratory number (if applicable); and
- Any other pertinent information.

Environmental samples will be packaged and shipped according to the following procedure:

1. Place sample container, properly identified and with a sealed lid, in a polyethylene bag, and seal bag;
2. Place sample in a fiberboard container or metal picnic cooler which has been lined with a large polyethylene bag;
3. Pack cooler with ice to maintain temperature of 4 degrees C;
4. Pack with enough noncombustible, absorbent, cushioning material to minimize the possibility of the container breaking;
5. Seal large bag; and
6. Seal or close outside container.

The appropriate side of the container must be marked "This End Up" and arrows should be drawn accordingly. No Department of Transportation (DOT) marking labeling is required. No DOT shipping papers are required. There are no DOT restrictions on mode of transportation.

## **5.2 HAZARDOUS SAMPLES**

Hazardous materials are not anticipated at the Site. However, should hazardous materials be encountered or samples at the Site, the following procedures will be implemented. Personnel who must complete a Hazardous Goods Airway Bill must first be DOT trained and certified every two years. Drummed waste samples, tank samples, sludge samples, and grossly contaminated soil samples will be shipped as DOT Hazardous Materials. The designation "Flammable Liquid" or "Flammable Solid" will be used. The samples will be transported as follows:

1. Collect sample in a 16 ounce or smaller glass or polyethylene container with nonmetallic Teflon-lined screw cap. Allow sufficient air space (approximately 10% by volume) so container is not liquid full at 54 °C (130 °F). If collecting a solid material, the container plus contents should not exceed 1 pound net weight. If sampling for volatile organic analysis, fill VOA container to septum but place the VOA container inside a 16 ounce or smaller container so the required air space may be provided. Large quantities, up to 3.786 liters (1 gallon), may be collected if the sample's flash point is 23 °C (75 °F) or higher. In this case, the flash point must be marked on the outside container (e.g., carton, cooler), and shipping papers should state that "Flash point is 73 °F or higher."
2. Seal sample and place in a 4-mil thick polyethylene bag, one sample per bag.
3. Place sealed bag inside a metal can with noncombustible, absorbent cushioning material (e.g., vermiculite or earth) to prevent breakage, one bag per can. Pressure-close the can and use clips, tape or other positive means to hold the lid securely.
4. Mark the can with:
  - Name and address of originator
  - "Flammable Liquid N.O.S. UN 1993"
  - (or "Flammable Solid N.O.S. UN 1325)
  - NOTE: UN numbers are now required in proper shipping names.

5. Place one or more metal cans in a strong outside container such as a picnic cooler or fiberboard box. Preservatives are not used for hazardous waste site samples.
6. Prepare for shipping:

"Flammable Liquid, N.O.S. UN 1993" or "Flammable Solid, N.O.S. UN 1325"; "Cargo Aircraft Only" (if more than 1 quart net per outside package); "Limited Quantity" or "Ltd. Qty."; "Laboratory Samples"; "Net Weight \_\_\_\_" or "Net Volume \_\_\_\_" (of hazardous contents) should be indicated on shipping papers and on outside of shipping container. "This Side Up" or "This End Up" should also be on container. Sign shipper certification.
7. Stand by for possible carrier requests to open outside containers for inspection or modify packaging. It is wise to contact carrier before packing to ascertain local packaging requirements and not to leave area before the carrier vehicle (aircraft, truck) is on its way. The International Air Transport Association's Dangerous Goods regulations will need to be followed for using FedEx for the shipment of hazardous samples.

### **5.2.1 Shipping Papers**

A blank Langan shipping paper should be filled out and maintained within the driver's reach, whenever a Langan employee carries hazardous materials in a vehicle in quantities above those allowed for Materials of Trade (MOTs). Such materials may not include more than 8 gallons of the following:

- Gasoline (for use in a generator) UN 1203, Guide #27;
- Methanol (for use in decontamination procedures) UN 1230, Guide #28;
- Nitric Acid (for use in decontamination procedures) UN 1760, Guide #60; and
- Hydrochloric Acid (for use in decontamination procedures) UN 1789, Guide #60.

Other materials may include the following:

- > 220 pounds of compressed Gas [Air, Compressed] (calibration gas for the PID, or Grade D breathing air for Level B work) UN 1002, Class 2.2; and
- Other hazardous materials as defined by the DOT.

Appropriate MSDSs should be maintained with the shipping papers and/or the pocket DOT Emergency Response Guidebook.



## **SECTION 6 ACCIDENT PREVENTION AND CONTINGENCY PLAN**

### **6.1 ACCIDENT PREVENTION**

#### **6.1.1 Site-Specific Training**

All field personnel will receive health and safety training prior to the initiation of any site activities. The site-specific training form provided in Attachment B must be signed, dated, and returned to the Langan Field Safety Officer. On a day-to-day basis, individual personnel should be constantly alert for indicators of potentially hazardous situations and for signs and symptoms in themselves and others that warn of hazardous conditions and exposures. Rapid recognition of dangerous situations can avert an emergency. Before daily work assignments, a regular meeting should be held. Discussion should include:

- Tasks to be performed;
- Time constraints (e.g., rest breaks, cartridge changes);
- Hazards that may be encountered, including their effects, how to recognize symptoms or monitor them, concentration limits, or other danger signals; and
- Emergency procedures.

#### **6.1.2 Vehicles and Heavy Equipment**

Working with large motor vehicles and heavy equipment could be a major hazard at this site. Injuries can result from equipment hitting or running over personnel, impacts from flying objects, or overturning of vehicles. Vehicle and heavy equipment design and operation will be in accordance with 29 CFR, Subpart O, 1926.600 through 1926.602. In particular, the following precautions will be utilized to help prevent injuries/accidents.

- Brakes, hydraulic lines, light signals, fire extinguishers, fluid levels, steering, tires, horn, and other safety devices will be checked at the beginning of each shift.
- Large construction motor vehicles will not be backed up unless:
  - The vehicle has a reverse signal alarm audible above the surrounding noise level; or
  - The vehicle is backed up only when an observer signals that it is safe to do so.
- Heavy equipment or motor vehicle cable will be kept free of all nonessential items, and all loose items will be secured.

- Large construction motor vehicles and heavy equipment will be provided with necessary safety equipment (such as seat belts, roll-over protection, emergency shut-off in case of roll-over, backup warning lights and audible alarms).
- Blades and buckets will be lowered to the ground and parking brakes will be set before shutting off any heavy equipment or vehicles.

## **6.2 SPILL CONTROL PLAN**

All personnel must take every precaution to minimize the potential for spills during site operations. Any spill shall be reported immediately to the FSO. Spill control apparatus (sorbent materials) will be located on-site. All materials used for the clean up of spills will be containerized and labeled separately from other wastes.

## **6.3 CONTINGENCY PLAN**

### **6.3.1 Emergency Procedures**

In the event that an emergency develops on site, the procedures delineated herein are to be immediately followed. Emergency conditions are considered to exist if:

- Any member of the field crew is involved in an accident or experiences any adverse effects or symptoms of exposure while on site.
- A condition is discovered that suggests the existence of a situation more hazardous than anticipated.

General emergency procedures, and specific procedures for personal injury, chemical exposure and radiation exposure, are described below.

### **6.3.2 Chemical Exposure**

If a member of the field crew demonstrates symptoms of chemical exposure the procedures outlined below should be followed:

- Another team member (buddy) should remove the individual from the immediate area of contamination. The buddy should communicate to the Field Team Leader (via voice and hand signals) of the chemical exposure. The Field Team Leader should contact the appropriate emergency response agency.
- Precautions should be taken to avoid exposure of other individuals to the chemical.
- If the chemical is on the individual's clothing, the chemical should be neutralized or removed if it is safe to do so.

- If the chemical has contacted the skin, the skin should be washed with copious amounts of water.
- In case of eye contact, an emergency eye wash should be used. Eyes should be washed for at least 15 minutes.
- All chemical exposure incidents must be reported in writing to the Langan Health and Safety Officer. The Field Safety Officer or Field Team Leader is responsible for completing the accident report.

### **6.3.3 Personal Injury**

In case of personal injury at the site, the following procedures should be followed:

- Another team member (buddy) should signal the Field Team Leader that an injury has occurred.
- A field team member trained in first aid can administer treatment to an injured worker.
- The victim should then be transported to the nearest hospital or medical center. If necessary, an ambulance should be called to transport the victim.
- For less severe cases, the individual can be taken to the site dispensary.
- The Field Team Leader or Field Safety Officer is responsible for making certain that an Accident Report Form is completed. This form is to be submitted to the Langan Health and Safety Officer. Follow-up action should be taken to correct the situation that caused the accident.
- Any incident (near miss, property damage, first aid, medical treatment, etc.) must be reported.

A first-aid kit and blood-borne pathogens kit will be kept on-site during the field activities.

### **6.3.4 Evacuation Procedures**

- The Field Team Leader will initiate evacuation procedures by signaling to leave the site.
- All personnel in the work area should evacuate the area and meet in the common designated area.
- All personnel suspected to be in or near the contract work area should be accounted for and the whereabouts or missing persons determined immediately.
- The Field Team Leader will then give further instruction.

#### **6.3.5 Procedures Implemented in the Event of a Major Fire, Explosion, or Emergency**

- Notify the paramedics and/or fire department, as necessary;
- Signal the evacuation procedure previously outlined and implement the entire procedure;
- Isolate the area;
- Stay upwind of any fire;
- Keep the area surrounding the problem source clear after the incident occurs;
- Complete accident report for and distribute to appropriate personnel.

## **6.4 COMMUNITY AIR MONITORING PLAN**

Community air monitoring will be conducted in compliance with the New York State Department of Health (NYSDOH) Generic Community Air Monitoring Plan (CAMP) outlined below.

Monitoring for dust and odors will be conducted during all ground intrusive activities by the Remediation Engineer's field inspector. Continuous monitoring on the perimeter of the work zones for odor, VOCs, and dust will be required for all ground intrusive activities such as soil excavation and handling activities. The work zone is defined as the general area in which machinery is operating in support of remediation activities. A portable PID will be used to monitor the work zone and for periodic monitoring for VOCs during activities such as soil and groundwater sampling. The Site perimeter will be visually monitored for fugitive dust emissions.

The following actions will be taken based on total organic vapor (TOV) levels measured:

- If total organic vapor levels exceed 5 ppm above background for the 15-minute average at the perimeter, work activities will be temporarily halted and monitoring continued. If levels readily decrease (per instantaneous readings) below 5 ppm above background, work activities will resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the hot zone persist at levels in excess of 5 ppm above background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps work activities will resume provided that the total organic vapor level 200 feet downwind of the hot zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less – but in no case less than 20 feet, is below 5 ppm above background for the 15-minute average.
- If the total organic vapor level is above 25 ppm at the perimeter of the hot zone, activities will be shutdown.

The following actions will be taken based on visual dust observations:

- If airborne dust is observed leaving the work area, then dust suppression techniques will be employed.

#### **6.4.1 Vapor Emission Response Plan**

If the ambient air concentration of organic vapors exceeds 5 ppm above background at the perimeter of the hot zone, boring and well installation, and excavation activities will be halted or odor controls will be employed, and monitoring continued. When work shut-down occurs, downwind air monitoring as directed by the Field Safety Officer will be implemented to ensure that vapor emission does not impact the nearest residential or commercial structure at levels exceeding those specified in the Major Vapor Emission section.

If the organic vapor level decreases below 5 ppm above background, sampling and boring and well installation can resume, provided:

- The organic vapor level 200 feet downwind of the hot zone or half the distance to the nearest residential or commercial structure, whichever is less, is below 1 ppm over background, and
- More frequent intervals of monitoring, as directed by the Site Health and Safety Officer, are conducted.

#### **6.4.2 Major Vapor Emission**

If any organic levels greater than 5 ppm over background are identified 200 feet downwind from the work site, or half the distance to the nearest residential or commercial property, whichever is less, all work activities must be halted or odor controls must be implemented.

If, following the cessation of the work activities, or as the result of an emergency, organic levels persist above 5 ppm above background 200 feet downwind or half the distance to the nearest residential or commercial property from the hot zone, then the air quality must be monitored within 20 feet of the perimeter of the nearest residential or commercial structure (20 Foot Zone).

If either of the following criteria is exceeded in the 20 Foot Zone, then the Major Vapor Emission Response Plan shall automatically be implemented.


- Sustained organic vapor levels approaching 5 ppm above background for a period of more than 30 minutes, or
- Organic vapor levels greater than 5 ppm above background for any time period.

#### **6.4.3 Major Vapor Emission Response Plan**

Upon activation, the following activities will be undertaken:

1. The local police authorities will immediately be contacted by the Site Health and Safety Officer and advised of the situation;
2. Frequent air monitoring will be conducted at 30-minute intervals within the 20 Foot Zone. If two successive readings below action levels are measured, air monitoring may be halted or modified by the Site Health and Safety Officer; and

All Emergency contacts will go into effect as appropriate.

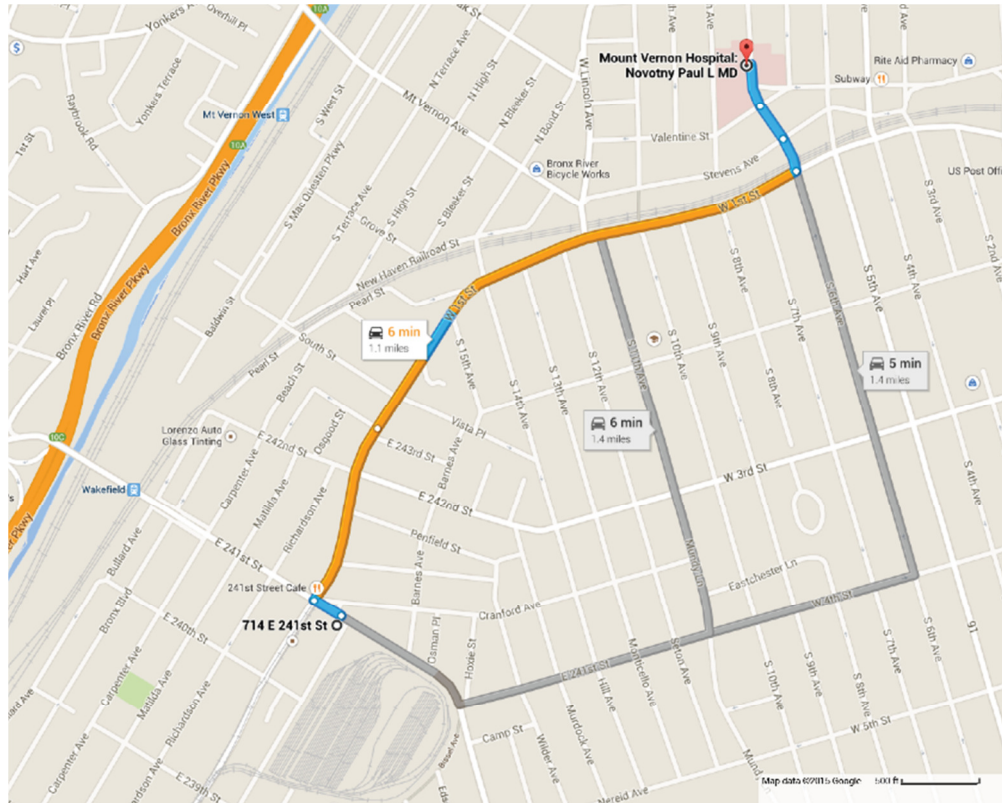

**FIGURE 1 - HOSPITAL ROUTE PLAN (Mount Vernon Hospital)**

**Site Location:** 714 East 241<sup>st</sup> Street  
Bronx, NY

**Hospital Location:** Mount Vernon Hospital  
Emergency Room (914) 361-6040  
12 North 7<sup>th</sup> Avenue  
Mount Vernon, NY

### Route to Hospital

**From 714 East 241<sup>st</sup> Street, Bronx to Mount Vernon Hospital, located at 12 North 7<sup>th</sup> Avenue, Mount Vernon**

- 1:** Head northwest on East 241<sup>st</sup> Street towards Cranford Avenue
- 2:** Turn right onto White Plains Road
- 3:** Continue onto West 1<sup>st</sup> Street
- 4:** Turn left onto Wilson Place
- 5:** Continue onto Roosevelt Square West
- 6:** Continue onto 7<sup>th</sup> Avenue

**Total Est. Time:** 6 minutes **Total Est. Distance:** 1.1 miles



## **ATTACHMENT A**

### **Air Monitoring Equipment Calibration and Maintenance**

All monitoring instruments must be calibrated and maintained periodically. Calibration and on-site maintenance records will be kept in the field log book. The operator must understand the limitations and possible sources of errors for each instrument. It is important that the operator checks that the instrument responds properly to the substances it was designed to monitor. Air quality monitoring equipment, including photoionization detectors (PIDs) must be calibrated at least once each day. The specific instructions for calibration and maintenance provided for each instrument should be followed.

## **ATTACHMENT B**

### **Forms for Health and Safety Related Activity**

Note: The OSHA Job Safety and Health Protection Poster must be posted prominently during field activities. The following page is an example of the poster to be used in the field. The actual poster must be an 11 inch by 17 inch size version of this page. The OSHA 300 Log of injuries and illnesses is maintained in the home office of each Langan employee.

# You Have a Right to a Safe and Healthful Workplace. **IT'S THE LAW!**

- You have the right to notify your employer or OSHA about workplace hazards. You may ask OSHA to keep your name confidential.
- You have the right to request an OSHA inspection if you believe that there are unsafe and unhealthful conditions in your workplace. You or your representative may participate in the inspection.
- You can file a complaint with OSHA within 30 days of discrimination by your employer for making safety and health complaints or for exercising your rights under the *OSH Act*.
- You have a right to see OSHA citations issued to your employer. Your employer must post the citations at or near the place of the alleged violation.
- Your employer must correct workplace hazards by the date indicated on the citation and must certify that these hazards have been reduced or eliminated.
- You have the right to copies of your medical records or records of your exposure to toxic and harmful substances or conditions.
- Your employer must post this notice in your workplace.



The *Occupational Safety and Health Act of 1970 (OSH Act)*, P.L. 91-596, assures safe and healthful working conditions for working men and women throughout the Nation. The Occupational Safety and Health Administration, in the U.S. Department of Labor, has the primary responsibility for administering the *OSH Act*. The rights listed here may vary depending on the particular circumstances. To file a complaint, report an emergency, or seek OSHA advice, assistance, or products, call 1-800-321-OSHA or your nearest OSHA office: • Atlanta (404) 562-2300 • Boston (617) 565-9860 • Chicago (312) 353-2220 • Dallas (214) 767-4731 • Denver (303) 844-1600 • Kansas City (816) 426-5861 • New York (212) 337-2378 • Philadelphia (215) 861-4900 • San Francisco (415) 975-4310 • Seattle (206) 553-5930. Teletypewriter (TTY) number is 1-877-889-5627. To file a complaint online or obtain more information on OSHA federal and state programs, visit OSHA's website at [www.osha.gov](http://www.osha.gov). If your workplace is in a state operating under an OSHA-approved plan, your employer must post the required state equivalent of this poster.

## 1-800-321-OSHA [www.osha.gov](http://www.osha.gov)

U.S. Department of Labor  • Occupational Safety and Health Administration • OSHA 3165

Project Name: \_\_\_\_\_

**Injured or Ill Employee**

1. Name \_\_\_\_\_ Social Security # \_\_\_\_\_  
(First) (Middle) (Last)
2. Home Address \_\_\_\_\_  
(No. and Street) (City or Town) (State and Zip)
3. Age \_\_\_\_\_ 4. Sex: Male ( ) Female ( )
5. Occupation \_\_\_\_\_  
(Specific job title, not the specific activity employee was performing at time of injury)
6. Department \_\_\_\_\_  
(Enter name of department in which injured person is employed, even though they may have been temporarily working in another department at the time of injury)

**Employer**

7. Name \_\_\_\_\_
8. Mailing Address \_\_\_\_\_  
(No. and Street) (City or Town) (State and Zip)
9. Location (if different from mailing address): \_\_\_\_\_

**The Accident or Exposure to Occupational Illness**

10. Place of accident or exposure \_\_\_\_\_  
(No. and Street) (City or Town) (State and Zip)
11. Was place of accident or exposure on employer's premises? \_\_\_\_\_(Yes/No)
12. What was the employee doing when injured? \_\_\_\_\_  
(Be specific - was employee using tools or equipment or handling material?)
13. How did the accident occur? \_\_\_\_\_  
(Describe fully the events that resulted in the injury or occupational illness. Tell what happened and how. Name objects and substances involved.)
- Give details on all factors that led to accident. Use separate sheet if needed)
14. Time of accident: \_\_\_\_\_
15. Date of injury or initial diagnosis of occupational illness \_\_\_\_\_

16. WITNESS TO ACCIDENT	_____	_____	_____
	(Name)	(Affiliation)	(Phone No.)
	_____	_____	_____
	(Name)	(Affiliation)	(Phone No.)
	_____	_____	_____
	(Name)	(Affiliation)	(Phone No.)

**Occupational Injury or Occupational Illness**

17. Describe the injury or illness in detail; indicate part of body affected.

\_\_\_\_\_

18. Name the object or substance that directly injured the employee. (For example, object that struck employee; the vapor or poison inhaled or swallowed; the chemical or radiation that irritated the skin; or in cases of strains, hernias, etc., the object the employee was lifting, pulling, etc.)

\_\_\_\_\_

19. Did the accident result in employee fatality? \_\_\_\_\_ (Yes or No)

20. Number of lost workdays \_\_\_\_/restricted workdays \_\_\_\_ resulting from injury or illness?

**Other**

21. Did you see a physician for treatment? \_\_\_\_\_ (Yes or No) \_\_\_\_\_ (Date)

22. Name and address of physician \_\_\_\_\_

(No. and Street)	(City or Town)	(State and Zip)
------------------	----------------	-----------------

23. If hospitalized, name and address of hospital \_\_\_\_\_

(No. and Street)	(City or Town)	(State and Zip)
------------------	----------------	-----------------

Date of report \_\_\_\_\_ Prepared by \_\_\_\_\_

Official position \_\_\_\_\_

**(For Langan employees only)**

(Project Title)

(Project Number)

Name (print)

Signature

Date

[illegible]

B-5

**Site-Specific Health and Safety Training**

(For all Langan and subcontract employees on site)

I hereby confirm that site-specific health and safety training has been conducted by the site health and safety officer that included:

- Names of personnel responsible for site safety and health
- Safety, health, and other hazards at the site
- Proper use of personal protective equipment
- Work practices by which the employee can minimize risk from hazards
- Safe use of engineering controls and equipment on the site
- Acute effects of compounds at the site
- Decontamination procedures

For the following project:

_____	_____	
(Project Title)	(Project Number)	
Name (print)	Signature	Date
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____


Place in project Health and Safety File as soon as possible

## **ATTACHMENT C**

### **Material Safety Data Sheets**

- Alconox
- Acetone
- Arsenic
- Barium
- Benzene
- Beryllium
- Chloroethane
- Chromium
- Copper
- 1,2-Dichloroethane
- Iron
- Lead
- Magnesium
- Manganese
- Mercury
- Nickel
- Polychlorinated Biphenyls (PCB)
- Polynuclear Aromatic Hydrocarbons (PAH)
- Sodium
- Total Xylenes
- Zinc
- Compressed Oxygen in Air
- Diesel Fuel
- Isobutylene Gas in Air, 100 ppm
- Unleaded Gasoline





Health	2
Fire	3
Reactivity	0
Personal Protection	H

## Material Safety Data Sheet

### Acetone MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Acetone

**Catalog Codes:** SLA3502, SLA1645, SLA3151, SLA3808

**CAS#:** 67-64-1

**RTECS:** AL3150000

**TSCA:** TSCA 8(b) inventory: Acetone

**CI#:** Not applicable.

**Synonym:** 2-propanone; Dimethyl Ketone;  
Dimethylformaldehyde; Pyroacetic Acid

**Chemical Name:** Acetone

**Chemical Formula:** C<sub>3</sub>H<sub>6</sub>O

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Acetone	67-64-1	100

**Toxicological Data on Ingredients:** Acetone: ORAL (LD<sub>50</sub>): Acute: 5800 mg/kg [Rat]. 3000 mg/kg [Mouse]. 5340 mg/kg [Rabbit]. VAPOR (LC<sub>50</sub>): Acute: 50100 mg/m 8 hours [Rat]. 44000 mg/m 4 hours [Mouse].

#### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Classified Reproductive system/toxin/female, Reproductive system/toxin/male [SUSPECTED]. The substance is toxic to central nervous system (CNS). The substance may be toxic to kidneys, the reproductive system, liver, skin. Repeated or prolonged exposure to the substance can produce target organs damage.

#### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Get medical attention.

**Skin Contact:**

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if symptoms appear.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** 465°C (869°F)

**Flash Points:** CLOSED CUP: -20°C (-4°F). OPEN CUP: -9°C (15.8°F) (Cleveland).

**Flammable Limits:** LOWER: 2.6% UPPER: 12.8%

**Products of Combustion:** These products are carbon oxides (CO, CO<sub>2</sub>).

**Fire Hazards in Presence of Various Substances:** Highly flammable in presence of open flames and sparks, of heat.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Slightly explosive in presence of open flames and sparks, of oxidizing materials, of acids.

**Fire Fighting Media and Instructions:**

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog.

**Special Remarks on Fire Hazards:** Vapor may travel considerable distance to source of ignition and flash back.

**Special Remarks on Explosion Hazards:**

Forms explosive mixtures with hydrogen peroxide, acetic acid, nitric acid, nitric acid + sulfuric acid, chromic anhydride, chromyl chloride, nitrosyl chloride, hexachloromelamine, nitrosyl perchlorate, nitryl perchlorate, permonosulfuric acid, thiodiglycol + hydrogen peroxide, potassium ter-butoxide, sulfur dichloride, 1-methyl-1,3-butadiene, bromoform, carbon, air, chloroform, thitriazylperchlorate.

## Section 6: Accidental Release Measures

**Small Spill:**

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container.

**Large Spill:**

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

**Section 7: Handling and Storage****Precautions:**

Keep locked up.. Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapor/spray. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, reducing agents, acids, alkalis.

**Storage:**

Store in a segregated and approved area (flammables area) . Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Keep away from direct sunlight and heat and avoid all possible sources of ignition (spark or flame).

**Section 8: Exposure Controls/Personal Protection****Engineering Controls:**

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

**Personal Protection:**

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 500 STEL: 750 (ppm) from ACGIH (TLV) [United States] TWA: 750 STEL: 1000 (ppm) from OSHA (PEL) [United States] TWA: 500 STEL: 1000 [Australia] TWA: 1185 STEL: 2375 (mg/m3) [Australia] TWA: 750 STEL: 1500 (ppm) [United Kingdom (UK)] TWA: 1810 STEL: 3620 (mg/m3) [United Kingdom (UK)] TWA: 1800 STEL: 2400 from OSHA (PEL) [United States] Consult local authorities for acceptable exposure limits.

**Section 9: Physical and Chemical Properties**

**Physical state and appearance:** Liquid.

**Odor:** Fruity. Mint-like. Fragrant. Ethereal

**Taste:** Pungent, Sweetish

**Molecular Weight:** 58.08 g/mole

**Color:** Colorless. Clear

**pH (1% soln/water):** Not available.

**Boiling Point:** 56.2°C (133.2°F)

**Melting Point:** -95.35 (-139.6°F)

**Critical Temperature:** 235°C (455°F)

**Specific Gravity:** 0.79 (Water = 1)

**Vapor Pressure:** 24 kPa (@ 20°C)

**Vapor Density:** 2 (Air = 1)

**Volatility:** Not available.

**Odor Threshold:** 62 ppm

**Water/Oil Dist. Coeff.:** The product is more soluble in water;  $\log(\text{oil/water}) = -0.2$

**Ionicity (in Water):** Not available.

**Dispersion Properties:** See solubility in water.

**Solubility:** Easily soluble in cold water, hot water.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Excess heat, ignition sources, exposure to moisture, air, or water, incompatible materials.

**Incompatibility with various substances:** Reactive with oxidizing agents, reducing agents, acids, alkalis.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:** Not available.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Absorbed through skin. Dermal contact. Eye contact. Inhalation.

### Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 3000 mg/kg [Mouse]. Acute toxicity of the vapor (LC50): 44000 mg/m<sup>3</sup> 4 hours [Mouse].

### Chronic Effects on Humans:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. DEVELOPMENTAL TOXICITY: Classified Reproductive system/toxin/female, Reproductive system/toxin/male [SUSPECTED]. Causes damage to the following organs: central nervous system (CNS). May cause damage to the following organs: kidneys, the reproductive system, liver, skin.

### Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

**Special Remarks on Toxicity to Animals:** Not available.

### Special Remarks on Chronic Effects on Humans:

May affect genetic material (mutagenicity) based on studies with yeast (*S. cerevisiae*), bacteria, and hamster fibroblast cells. May cause reproductive effects (fertility) based upon animal studies. May contain trace amounts of benzene and formaldehyde which may cancer and birth defects. Human: passes the placental barrier.

### Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: Skin: May cause skin irritation. May be harmful if absorbed through the skin. Eyes: Causes eye irritation, characterized by a burning sensation, redness, tearing, inflammation, and possible corneal injury. Inhalation: Inhalation at high concentrations affects the sense organs, brain and causes respiratory tract irritation. It also may affect the Central Nervous System (behavior) characterized by dizziness, drowsiness, confusion, headache, muscle weakness, and possibly motor incoordination, speech abnormalities, narcotic effects and coma. Inhalation may also affect the gastrointestinal tract (nausea, vomiting). Ingestion: May cause irritation of the digestive (gastrointestinal) tract (nausea, vomiting). It may also

affect the Central Nervous System (behavior), characterized by depression, fatigue, excitement, stupor, coma, headache, altered sleep time, ataxia, tremors as well as the blood, liver, and urinary system (kidney, bladder, ureter) and endocrine system. May also have musculoskeletal effects. Chronic Potential Health Effects: Skin: May cause dermatitis. Eyes: Eye irritation.

## Section 12: Ecological Information

### Ecotoxicity:

Ecotoxicity in water (LC50): 5540 mg/l 96 hours [Trout]. 8300 mg/l 96 hours [Bluegill]. 7500 mg/l 96 hours [Fathead Minnow]. 0.1 ppm any hours [Water flea].

**BOD5 and COD:** Not available.

### Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The product itself and its products of degradation are not toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

### Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

## Section 14: Transport Information

**DOT Classification:** CLASS 3: Flammable liquid.

**Identification:** : Acetone UNNA: 1090 PG: II

**Special Provisions for Transport:** Not available.

## Section 15: Other Regulatory Information

### Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause reproductive harm (male) which would require a warning under the statute: Benzene California prop. 65: This product contains the following ingredients for which the State of California has found to cause birth defects which would require a warning under the statute: Benzene California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Benzene, Formaldehyde Connecticut hazardous material survey.: Acetone Illinois toxic substances disclosure to employee act: Acetone Illinois chemical safety act: Acetone New York release reporting list: Acetone Rhode Island RTK hazardous substances: Acetone Pennsylvania RTK: Acetone Florida: Acetone Minnesota: Acetone Massachusetts RTK: Acetone Massachusetts spill list: Acetone New Jersey: Acetone New Jersey spill list: Acetone Louisiana spill reporting: Acetone California List of Hazardous Substances (8 CCR 339): Acetone TSCA 8(b) inventory: Acetone TSCA 4(a) final test rules: Acetone TSCA 8(a) IUR: Acetone

### Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

### Other Classifications:

### WHMIS (Canada):

CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F). CLASS D-2B: Material causing other toxic effects (TOXIC).

**DSCL (EEC):**

R11- Highly flammable. R36- Irritating to eyes. S9- Keep container in a well-ventilated place. S16- Keep away from sources of ignition - No smoking. S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 3

**Reactivity:** 0

**Personal Protection:** h

**National Fire Protection Association (U.S.A.):**

**Health:** 1

**Flammability:** 3

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

**Section 16: Other Information****References:**


-Material safety data sheet issued by: la Commission de la Santé et de la Sécurité du Travail du Québec. -The Sigma-Aldrich Library of Chemical Safety Data, Edition II. -Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987. LOLI, RTECS, HSDB databases. Other MSDSs

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:13 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*

**Alconox®****MATERIAL SAFETY DATA SHEET**

**Alconox, Inc.**  
 30 Glenn Street  
 White Plains, NY 10603

24 Hour Emergency Number – Chem-Tel (800) 255-3924

**I. IDENTIFICATION**

Product Name (as appears on label)	ALCONOX
CAS Registry Number:	Not Applicable
Effective Date:	January 1, 2001
Chemical Family:	Anionic Powdered Detergent
Manufacturer Catalog Numbers for sizes	1104, 1125, 1150, 1101, 1103 and 1112

**II. HAZARDOUS INGREDIENTS/IDENTITY INFORMATION**

There are no hazardous ingredients in ALCONOX as defined by the OSHA Standard and Hazardous Substance List 29 CFR 1910 Subpart Z.

**III. PHYSICAL/CHEMICAL CHARACTERISTICS**

Boiling Point (F):	Not Applicable
Vapor Pressure (mm Hg):	Not Applicable
Vapor Density (AIR=1):	Not Applicable
Specific Gravity (Water=1):	Not Applicable
Melting Point:	Not Applicable
Evaporation Rate (Butyl Acetate=1):	Not Applicable
Solubility in Water:	Appreciable-Soluble to 10% at ambient conditions
Appearance:	White powder interspersed with cream colored flakes.
pH:	9.5 (1%)

**IV. FIRE AND EXPLOSION DATA**

Flash Point (Method Used):	None
Flammable Limits:	LEL: No Data UEL: No Data
Extinguishing Media:	Water, dry chemical, CO <sub>2</sub> , foam
Special Fire fighting Procedures:	Self-contained positive pressure breathing apparatus and protective clothing should be worn when fighting fires involving chemicals.
Unusual Fire and Explosion Hazards:	None

**V. REACTIVITY DATA**

Stability:	Stable
Hazardous Polymerization:	Will not occur
Incompatibility (Materials to Avoid):	None
Hazardous Decomposition or Byproducts:	May release CO <sub>2</sub> on burning

**VI. HEALTH HAZARD DATA**

Route(s) of Entry:	Inhalation? Yes Skin? No Ingestion? Yes
Health Hazards (Acute and Chronic):	Inhalation of powder may prove locally irritating to mucous membranes. Ingestion may cause discomfort and/or diarrhea. Eye contact may prove irritating.
Carcinogenicity:	NTP? No IARC Monographs? No OSHA Regulated? No
Signs and Symptoms of Exposure:	Exposure may irritate mucous membranes. May cause sneezing.
Medical Conditions Generally Aggravated by Exposure:	Not established. Unnecessary exposure to this product or any industrial chemical should be avoided. Respiratory conditions may be aggravated by powder.
Emergency and First Aid Procedures:	Eyes: Immediately flush eyes with water for at least 15 minutes. Call a physician. Skin: Flush with plenty of water. Ingestion: Drink large quantities of water or milk. Do not induce vomiting. If vomiting occurs administer fluids. See a physician for discomfort.

**VII. PRECAUTIONS FOR SAFE HANDLING AND USE**

Steps to be Taken if Material is Released or Spilled:	Material foams profusely. Recover as much as possible and flush remainder to sewer. Material is biodegradable.
Waste Disposal Method:	Small quantities may be disposed of in sewer. Large quantities should be disposed of in accordance with local ordinances for detergent products.
Precautions to be Taken in Storing and Handling:	Material should be stored in a dry area to prevent caking.
Other Precautions:	No special requirements other than the good industrial hygiene and safety practices employed with any industrial chemical.

**VIII. CONTROL MEASURES**

Respiratory Protection (Specify Type):	Dust mask - Recommended
Ventilation:	Local Exhaust-Normal Special-Not Required Mechanical-Not Required Other-Not Required
Protective Gloves:	Impervious gloves are useful but not required.
Eye Protection:	Goggles are recommended when handling solutions.
Other Protective Clothing or Equipment:	None
Work/Hygienic Practices:	No special practices required

---

THE INFORMATION HEREIN IS GIVEN IN GOOD FAITH BUT NO WARRANTY IS EXPRESSED OR IMPLIED.





# Right to Know Hazardous Substance Fact Sheet

Common Name: **ARSENIC**

Synonyms: Gray Arsenic; Arsen

Chemical Name: Arsenic

Date: June 1998

Revision: April 2008

CAS Number: 7440-38-2

RTK Substance Number: 0152

DOT Number: UN 1558

## Description and Use

**Arsenic** is a silver-gray or white metallic, odorless, brittle solid. It is used as an alloying agent for heavy metals, and in solders, medicines and herbicides.

## Reasons for Citation

- ▶ **Arsenic** is on the Right to Know Hazardous Substance List because it is cited by OSHA, ACGIH, DOT, NIOSH, NTP, DEP, IARC, IRIS and EPA.
- ▶ This chemical is on the Special Health Hazard Substance List.

SEE GLOSSARY ON PAGE 5.

## FIRST AID

### Eye Contact

- ▶ Immediately flush with large amounts of water for at least 15 minutes, lifting upper and lower lids. Remove contact lenses, if worn, while rinsing. Seek medical attention.

### Skin Contact

- ▶ Quickly remove contaminated clothing. Immediately wash contaminated skin with large amounts of soap and water.

### Inhalation

- ▶ Remove the person from exposure.
- ▶ Begin rescue breathing (using universal precautions) if breathing has stopped and CPR if heart action has stopped.
- ▶ Transfer promptly to a medical facility.

## EMERGENCY NUMBERS

Poison Control: 1-800-222-1222

CHEMTREC: 1-800-424-9300

NJDEP Hotline: 1-877-927-6337

National Response Center: 1-800-424-8802

EMERGENCY RESPONDERS >>>> SEE PAGE 6

## Hazard Summary

Hazard Rating	NJDHSS	NFPA
HEALTH	4	-
FLAMMABILITY	0	-
REACTIVITY	0	-
CARCINOGEN POISONOUS GASES ARE PRODUCED IN FIRE		

Hazard Rating Key: 0=minimal; 1=slight; 2=moderate; 3=serious; 4=severe

- ▶ **Arsenic** can affect you when inhaled and may be absorbed through the skin.
- ▶ **Arsenic** is a CARCINOGEN and may cause reproductive damage. **HANDLE WITH EXTREME CAUTION.**
- ▶ Skin contact can cause irritation, burns, rash and loss of pigment
- ▶ Eye contact can cause irritation and burns.
- ▶ Inhaling **Arsenic** can irritate the nose and throat and can cause an ulcer or hole in the "bone" (septum) dividing the inner nose.
- ▶ Exposure to **Arsenic** can cause weakness, poor appetite, nausea, vomiting, headache, and even death.
- ▶ **Arsenic** may damage the nervous system and the liver.
- ▶ **Arsenic** is a noncombustible solid, but when in *dust* or *fine powder* form it can EXPLODE when exposed to heat, flame or hot surfaces.

## Workplace Exposure Limits

OSHA: The legal airborne permissible exposure limit (PEL) is **0.01 mg/m<sup>3</sup>** averaged over an 8-hour workshift.

NIOSH: The recommended airborne exposure limit (REL) is **0.002 mg/m<sup>3</sup>**, which should not be exceeded at any time.

ACGIH: The threshold limit value (TLV) is **0.01 mg/m<sup>3</sup>** averaged over an 8-hour workshift.

- ▶ **Arsenic** is a CARCINOGEN in humans. There may be no safe level of exposure to a carcinogen, so all contact should be reduced to the lowest possible level.
- ▶ The above exposure limits are for air levels only. When skin contact also occurs, you may be overexposed, even though air levels are less than the limits listed above.

## Determining Your Exposure

- ▶ Read the product manufacturer's Material Safety Data Sheet (MSDS) and the label to determine product ingredients and important safety and health information about the product mixture.
- ▶ For each individual hazardous ingredient, read the New Jersey Department of Health and Senior Services Hazardous Substance Fact Sheet, available on the RTK Program website ([www.nj.gov/health/eoh/rtkweb](http://www.nj.gov/health/eoh/rtkweb)) or in your facility's RTK Central File or Hazard Communication Standard file.
- ▶ You have a right to this information under the New Jersey Worker and Community Right to Know Act, the Public Employees Occupational Safety and Health (PEOSH) Act if you are a public worker in New Jersey, and under the federal Occupational Safety and Health Act (OSHA) if you are a private worker.
- ▶ The New Jersey Right to Know Act requires most employers to label chemicals in the workplace and requires public employers to provide their employees with information concerning chemical hazards and controls. The federal OSHA Hazard Communication Standard (29 CFR 1910.1200) and the PEOSH Hazard Communication Standard (N.J.A.C. 12:100-7) require employers to provide similar information and training to their employees.

This Fact Sheet is a summary of available information regarding the health hazards that may result from exposure. Duration of exposure, concentration of the substance and other factors will affect your susceptibility to any of the potential effects described below.

## Health Hazard Information

### Acute Health Effects

The following acute (short-term) health effects may occur immediately or shortly after exposure to **Arsenic**:

- ▶ Skin contact can cause irritation, burns, rash and loss of pigment.
- ▶ Eye contact can cause irritation, burns and red, watery eyes.
- ▶ Inhaling **Arsenic** can irritate the nose and throat causing coughing and wheezing.
- ▶ Exposure to **Arsenic** can cause weakness, poor appetite, nausea, vomiting, headache, muscle cramps and even death.

### Chronic Health Effects

The following chronic (long-term) health effects can occur at some time after exposure to **Arsenic** and can last for months or years:

### Cancer Hazard

- ▶ **Arsenic** is a CARCINOGEN in humans. It has been shown to cause skin and lung cancer.
- ▶ Many scientists believe there is no safe level of exposure to a carcinogen.

### Reproductive Hazard

- ▶ Chronic **Arsenic** exposure has been associated with spontaneous abortions and still births.
- ▶ There is limited evidence that **Arsenic** is a teratogen in animals. Until further testing has been done, it should be treated as a possible teratogen in humans.

### Other Effects

- ▶ Repeated skin contact can cause thickened skin and/or patchy areas of darkening and loss of pigment. Some persons may develop white lines on the nails.
- ▶ Long-term exposure can cause an ulcer or hole in the "bone" (septum) dividing the inner nose, hoarseness and sore eyes.
- ▶ **Arsenic** may damage the nervous system causing numbness, "pins and needles," and/or weakness in the hands and feet.
- ▶ **Arsenic** may damage the liver.

## Medical

### Medical Testing

Before first exposure and every 12 months thereafter, OSHA requires your employer to provide (for persons exposed to greater than **0.005 mg/m<sup>3</sup>** of **Arsenic**) a work and medical history and exam which shall include:

- ▶ Chest x-ray
- ▶ Exam of the nose, skin and nails
- ▶ Test for urine **Arsenic**. This is most accurate at the end of the workday. Eating shellfish or fish may elevate **Arsenic** levels for up to two days. At NIOSH recommended exposure levels, urine **Arsenic** should not be greater than **100 micrograms per liter** of urine.

After suspected overexposure, repeat these tests and consider exam of the nervous system and liver function tests. Also examine your skin periodically for abnormal growth. Skin cancer from **Arsenic** can be easily cured when detected early.

OSHA requires your employer to provide you and your doctor with a copy of the OSHA *Inorganic Arsenic* Standard (29 CFR 1910.1018).

Any evaluation should include a careful history of past and present symptoms with an exam. Medical tests that look for damage already done are not a substitute for controlling exposure.

Request copies of your medical testing. You have a legal right to this information under the OSHA Access to Employee Exposure and Medical Records Standard (29 CFR 1910.1020).

### Mixed Exposures

- ▶ More than light alcohol consumption can cause liver damage. Drinking alcohol may increase the liver damage caused by **Arsenic**.

### Conditions Made Worse By Exposure

- ▶ Many scientists believe that skin changes such as thickening and pigment changes make those skin areas more likely to develop skin cancer.

### Workplace Controls and Practices

Very toxic chemicals, or those that are reproductive hazards or sensitizers, require expert advice on control measures if a less toxic chemical cannot be substituted. Control measures include: (1) enclosing chemical processes for severely irritating and corrosive chemicals, (2) using local exhaust ventilation for chemicals that may be harmful with a single exposure, and (3) using general ventilation to control exposures to skin and eye irritants. For further information on workplace controls, consult the NIOSH document on Control Banding at [www.cdc.gov/niosh/topics/ctrlbanding/](http://www.cdc.gov/niosh/topics/ctrlbanding/).

The following work practices are also recommended:

- ▶ Label process containers.
- ▶ Provide employees with hazard information and training.
- ▶ Monitor airborne chemical concentrations.
- ▶ Use engineering controls if concentrations exceed recommended exposure levels.
- ▶ Provide eye wash fountains and emergency showers.
- ▶ Wash or shower if skin comes in contact with a hazardous material.
- ▶ Always wash at the end of the workshift.
- ▶ Change into clean clothing if clothing becomes contaminated.
- ▶ Do not take contaminated clothing home.
- ▶ Get special training to wash contaminated clothing.
- ▶ Do not eat, smoke, or drink in areas where chemicals are being handled, processed or stored.
- ▶ Wash hands carefully before eating, smoking, drinking, applying cosmetics or using the toilet.

In addition, the following may be useful or required:

- ▶ Specific engineering controls are required for this chemical by OSHA. Refer to the OSHA *Inorganic Arsenic* Standard (29 CFR 1910.1018).
- ▶ Use a vacuum or a wet method to reduce dust during clean-up. **DO NOT DRY SWEEP.**
- ▶ Use a high efficiency particulate air (HEPA) filter when vacuuming. Do not use a standard shop vacuum.

### Personal Protective Equipment

The OSHA Personal Protective Equipment Standard (29 CFR 1910.132) requires employers to determine the appropriate personal protective equipment for each hazard and to train employees on how and when to use protective equipment.

The following recommendations are only guidelines and may not apply to every situation.

#### Gloves and Clothing

- ▶ Avoid skin contact with **Arsenic**. Wear personal protective equipment made from material which can not be permeated or degraded by this substance. Safety equipment suppliers and manufacturers can provide recommendations on the most protective glove and clothing material for your operation.

- ▶ Safety equipment manufacturers recommend *Nitrile*, *Natural Rubber* or *Silver Shield®* for gloves and DuPont Tyvek®, or the equivalent, as protective materials for clothing.
- ▶ All protective clothing (suits, gloves, footwear, headgear) should be clean, available each day, and put on before work.

#### Eye Protection

- ▶ Wear impact resistant eye protection with side shields.
- ▶ Wear a face shield with goggles when working with corrosive, high irritating or toxic substance.

#### Respiratory Protection

**Improper use of respirators is dangerous.** Respirators should only be used if the employer has implemented a written program that takes into account workplace conditions, requirements for worker training, respirator fit testing, and medical exams, as described in the OSHA Respiratory Protection Standard (29 CFR 1910.134).

- ▶ Where the potential exists for exposure not higher than **0.1 mg/m<sup>3</sup>**, use a half-mask air purifying respirator equipped with high efficiency filters.
- ▶ Where the potential exists for exposure not higher than **0.5 mg/m<sup>3</sup>**, use a full facepiece, air purifying respirator with high efficiency filters.
- ▶ Where the potential exists for exposure not higher than **5 mg/m<sup>3</sup>**, use any powered-air purifying respirator with high efficiency filters or a half-mask supplied-air respirator operated in a positive pressure mode.
- ▶ Leave the area immediately if (1) while wearing a filter or cartridge respirator you can smell, taste, or otherwise detect **Arsenic**, (2) while wearing particulate filters abnormal resistance to breathing is experienced, or (3) eye irritation occurs while wearing a full facepiece respirator. Check to make sure the respirator-to-face seal is still good. If it is, replace the filter or cartridge. If the seal is no longer good, you may need a new respirator.
- ▶ Consider all potential sources of exposure in your workplace. You may need a combination of filters, prefilters or cartridges to protect against different forms of a chemical (such as vapor and mist) or against a mixture of chemicals.
- ▶ Exposure to **5 mg/m<sup>3</sup>** is immediately dangerous to life and health. If the possibility of exposure above **5 mg/m<sup>3</sup>** exists, use a NIOSH approved self-contained breathing apparatus with a full facepiece operated in a pressure-demand or other positive-pressure mode equipped with an emergency escape air cylinder.

### Fire Hazards

If employees are expected to fight fires, they must be trained and equipped as stated in the OSHA Fire Brigades Standard (29 CFR 1910.156).

- ▶ **Arsenic** is noncombustible, however, **Arsenic dust or fine powder** can explode when exposed to heat, flame or hot surfaces.
- ▶ Use dry chemical, CO<sub>2</sub>, water spray or foam as extinguishing agents.
- ▶ **POISONOUS GASES ARE PRODUCED IN FIRE**, including *Arsenic Oxides*.
- ▶ Use water spray to keep fire-exposed containers cool.

## Spills and Emergencies

If employees are required to clean-up spills, they must be properly trained and equipped. The OSHA Hazardous Waste Operations and Emergency Response Standard (29 CFR 1910.120) may apply.

If **Arsenic** is spilled, take the following steps:

- ▶ Evacuate personnel and secure and control entrance to the area.
- ▶ Eliminate all ignition sources.
- ▶ Collect powdered material in the most convenient and safe manner, or use a HEPA-filter vacuum for clean-up, and deposit in sealed containers.
- ▶ Ventilate area of spill after clean-up is complete.
- ▶ DO NOT wash into sewer.
- ▶ It may be necessary to contain and dispose of **Arsenic** as a HAZARDOUS WASTE. Contact your state Department of Environmental Protection (DEP) or your regional office of the federal Environmental Protection Agency (EPA) for specific recommendations.

## Handling and Storage

Prior to working with **Arsenic** you should be trained on its proper handling and storage.

- ▶ A regulated, marked area should be established where **Arsenic** is handled, used or stored as required by the OSHA *Inorganic Arsenic* Standard (29 CFR 1910.1018).
- ▶ **Arsenic** reacts with OXIDIZING AGENTS (such as PERCHLORATES, PEROXIDES, PERMANGANATES, CHLORATES, NITRATES, CHLORINE, BROMINE and FLUORINE) to cause fires and explosions.
- ▶ **Arsenic** reacts with ACIDS (such as HYDROCHLORIC, SULFURIC and NITRIC) and HYDROGEN GAS to produce toxic *Arsine gas*.
- ▶ **Arsenic** is not compatible with powdered METALS (such as ZINC, LITHIUM, RUBIDIUM and PLATINUM); BROMINE AZIDE; LEAD MONOXIDE; and MERCURY OXIDE.
- ▶ Store in tightly closed containers in a cool, well-ventilated area away from COMBUSTIBLES and HEAT.
- ▶ DO NOT store in metal tanks.

## Occupational Health Information Resources

The New Jersey Department of Health and Senior Services, Occupational Health Service, offers multiple services in occupational health. These services include providing informational resources, educational materials, public presentations, and industrial hygiene and medical investigations and evaluations.

### For more information, please contact:

New Jersey Department of Health & Senior Services  
Right to Know Program  
PO Box 368  
Trenton, NJ 08625-0368  
Phone: 609-984-2202  
Fax: 609-984-7407  
E-mail: [rtk@doh.state.nj.us](mailto:rtk@doh.state.nj.us)  
Web address: <http://www.nj.gov/health/eoh/rtkweb>

***The Right to Know Hazardous Substance Fact Sheets  
are not intended to be copied and sold  
for commercial purposes.***

## GLOSSARY

**ACGIH** is the American Conference of Governmental Industrial Hygienists. They publish guidelines called Threshold Limit Values (TLVs) for exposure to workplace chemicals.

**Acute Exposure Guideline Levels** (AELs) are established by the EPA. They describe the risk to humans resulting from once-in-a lifetime, or rare, exposure to airborne chemicals.

**Boiling point** is the temperature at which a substance can change its physical state from a liquid to a gas.

A **carcinogen** is a substance that causes cancer.

The **CAS number** is unique, identifying number, assigned by the Chemical Abstracts Service, to a specific chemical.

**CFR** is the Code of Federal Regulations, which are the regulations of the United States government.

A **combustible** substance is a solid, liquid or gas that will burn.

A **corrosive** substance is a gas, liquid or solid that causes destruction of human skin or severe corrosion of containers.

**DEP** is the New Jersey Department of Environmental Protection.

**DOT** is the Department of Transportation, the federal agency that regulates the transportation of chemicals.

**EPA** is the Environmental Protection Agency, the federal agency responsible for regulating environmental hazards.

**ERG** is the Emergency Response Guidebook. It is a guide for emergency responders for transportation emergencies involving hazardous substances.

**Emergency Response Planning Guideline** (ERPG) values are intended to provide estimates of concentration ranges where one reasonably might anticipate observing adverse effects.

A **fetus** is an unborn human or animal.

A **flammable** substance is a solid, liquid, vapor or gas that will ignite easily and burn rapidly.

The **flash point** is the temperature at which a liquid or solid gives off vapor that can form a flammable mixture with air.

**IARC** is the International Agency for Research on Cancer, a scientific group.

**Ionization Potential** is the amount of energy needed to remove an electron from an atom or molecule. It is measured in electron volts.

**IRIS** is the Integrated Risk Information System database maintained by federal EPA. The database contains information on human health effects that may result from exposure to various chemicals in the environment.

**LEL or Lower Explosive Limit**, is the lowest concentration of a combustible substance (gas or vapor) in the air capable of continuing an explosion.

**mg/m<sup>3</sup>** means milligrams of a chemical in a cubic meter of air. It is a measure of concentration (weight/volume).

A **mutagen** is a substance that causes mutations. A **mutation** is a change in the genetic material in a body cell. Mutations can lead to birth defects, miscarriages, or cancer.

**NFPA** is the National Fire Protection Association. It classifies substances according to their fire and explosion hazard.

**NIOSH** is the National Institute for Occupational Safety and Health. It tests equipment, evaluates and approves respirators, conducts studies of workplace hazards, and proposes standards to OSHA.

**NTP** is the National Toxicology Program which tests chemicals and reviews evidence for cancer.

**OSHA** is the federal Occupational Safety and Health Administration, which adopts and enforces health and safety standards.

**PEOSHA** is the New Jersey Public Employees Occupational Safety and Health Act, which adopts and enforces health and safety standards in public workplaces.

**Permeated** is the movement of chemicals through protective materials.

**PIH** is a DOT designation for chemicals which are Poison Inhalation Hazards.

**ppm** means parts of a substance per million parts of air. It is a measure of concentration by volume in air.

A **reactive** substance is a solid, liquid or gas that releases energy under certain conditions.

**STEL** is a Short Term Exposure Limit which is usually a 15-minute exposure that should not be exceeded at any time during a work day.

A **teratogen** is a substance that causes birth defects by damaging the fetus.

**UEL or Upper Explosive Limit** is the highest concentration in air above which there is too much fuel (gas or vapor) to begin a reaction or explosion.

**Vapor Density** is the ratio of the weight of a given volume of one gas to the weight of another (usually *Hydrogen*), at the same temperature and pressure.

The **vapor pressure** is a measure of how readily a liquid or a solid mixes with air at its surface. A higher vapor pressure indicates a higher concentration of the substance in air and therefore increases the likelihood of breathing it in.

Common Name: **ARSENIC**

Synonyms: Gray Arsenic; Arsen

CAS No: 7440-38-2

Molecular Formula: As

RTK Substance No: 0152

Description: Silver-gray or white metallic, odorless, brittle solid

## HAZARD DATA

Hazard Rating	Firefighting	Reactivity
<b>4 - Health</b> <b>0 - Fire</b> <b>0 - Reactivity</b> <b>DOT#:</b> UN 1558 <b>ERG Guide #:</b> 152 <b>Hazard Class:</b> 6.1 (Poison)	<p><b>Arsenic</b> is noncombustible, however, <i>Arsenic dust</i> or <i>fine powder</i> can explode when exposed to heat, flame or hot surfaces.</p> <p>Use dry chemical, CO<sub>2</sub>, water spray or foam as extinguishing agents.</p> <p>POISONOUS GASES ARE PRODUCED IN FIRE, including <i>Arsenic Oxides</i>.</p> <p>Use water spray to keep fire-exposed containers cool.</p>	<p><b>Arsenic</b> reacts with OXIDIZING AGENTS (such as PERCHLORATES, PEROXIDES, PERMANGANATES, CHLORATES, NITRATES, CHLORINE, BROMINE and FLUORINE) to cause fires and explosions.</p> <p><b>Arsenic</b> reacts with ACIDS (such as HYDROCHLORIC, SULFURIC and NITRIC) and HYDROGEN GAS to produce toxic <i>Arsine gas</i>.</p> <p><b>Arsenic</b> is not compatible with <i>powdered METALS</i> (such as ZINC, LITHIUM, RUBIDIUM and PLATINUM); BROMINE AZIDE; LEAD MONOXIDE; and MERCURY OXIDE.</p>

## SPILL/LEAKS

### Isolation Distance:

Spills: 25 to 50 meters (75 to 150 feet)

Fire: 800 meters (1/2 mile)

Moisten spilled material first or use a HEPA-filter vacuum for clean-up.

DO NOT wash into sewer.

Toxic to aquatic organisms.

## PHYSICAL PROPERTIES

<b>Odor Threshold:</b>	Odorless
<b>Flash Point:</b>	Noncombustible solid
<b>Vapor Pressure:</b>	1 mm Hg at 701°F (372°C)
<b>Specific Gravity:</b>	5.7 (water = 1)
<b>Water Solubility:</b>	Insoluble
<b>Boiling Point:</b>	1,350°F (613°C)
<b>Ionization Potential:</b>	9.87 eV
<b>Molecular Weight:</b>	74.9

## EXPOSURE LIMITS

<b>OSHA:</b>	0.01 mg/m <sup>3</sup> , 8-hr TWA
<b>NIOSH:</b>	0.002 mg/m <sup>3</sup> , 15-min Ceiling
<b>ACGIH:</b>	0.01 mg/m <sup>3</sup> , 8-hr TWA
<b>IDLH:</b>	5 mg/m <sup>3</sup>

## PROTECTIVE EQUIPMENT

<b>Gloves:</b>	Natural Rubber, Nitrile or Silver Shield®
<b>Coveralls:</b>	DuPont Tyvek®
<b>Respirator:</b>	<0.1 mg/m <sup>3</sup> - Full facepiece APR with High efficiency filter <0.5 mg/m <sup>3</sup> - Supplied air

## HEALTH EFFECTS

<b>Eyes:</b>	Irritation, burns, red and watery eyes
<b>Skin:</b>	Irritation, burns, itching, rash and loss of pigment
<b>Inhalation:</b>	Nose and throat irritation with coughing, wheezing and hoarseness Weakness, headache, nausea, vomiting, and muscle cramps
<b>Chronic:</b>	Cancer (skin and lung) in humans

## FIRST AID AND DECONTAMINATION

**Remove** the person from exposure.

**Flush** eyes with large amounts of water for at least 15 minutes. Remove contact lenses if worn. Seek medical attention.

**Quickly** remove contaminated clothing and wash contaminated skin with large amounts of soap and water.

**Begin** artificial respiration if breathing has stopped and CPR if necessary.

**Transfer** to a medical facility.



## New Jersey Department of Health and Senior Services

# HAZARDOUS SUBSTANCE FACT SHEET

Common Name: **ASBESTOS**

CAS Number: See last page  
DOT Number: NA 2212

RTK Substance number: 0164  
Date: September 1994 Revision: January 2001

### HAZARD SUMMARY

- \* **Asbestos** can affect you when breathed in.
- \* **Asbestos** is a **CARCINOGEN--HANDLE WITH EXTREME CAUTION.**
- \* Repeated exposure to **Asbestos** can cause the disease called *Asbestosis*, a scarring of the lungs that results in changes on chest x-rays. *Asbestosis* develops some years (from seven to thirty) after the period of exposure. Symptoms include cough, shortness of breath and chest pain. It can progress to disability and death. The earlier exposure is stopped, the better the chance of stopping serious disease later.

### IDENTIFICATION

**Asbestos** is the common name for a group of mineral fibers that range in color from white, green, brown, to blue. It is used as a fireproofing and insulating agent, and in brake linings.

### REASON FOR CITATION

- \* **Asbestos** is on the Hazardous Substance List because it is regulated by OSHA and cited by ACGIH, DOT, NIOSH, NTP, DEP, IARC, HHAG and EPA.
- \* This chemical is on the Special Health Hazard Substance List because it is a **CARCINOGEN**.
- \* Definitions are provided on page 5.

### HOW TO DETERMINE IF YOU ARE BEING EXPOSED

The New Jersey Right to Know Act requires most employers to label chemicals in the workplace and requires public employers to provide their employees with information and training concerning chemical hazards and controls. The federal OSHA Hazard Communication Standard, 1910.1200, requires private employers to provide similar training and information to their employees.

- \* Exposure to hazardous substances should be routinely evaluated. This may include collecting personal and area air samples. You can obtain copies of sampling results from your employer. You have a legal right to this information under OSHA 1910.1020.

- \* If you think you are experiencing any work-related health problems, see a doctor trained to recognize occupational diseases. Take this Fact Sheet with you.

### WORKPLACE EXPOSURE LIMITS

The following exposure limits are for fibers longer than **5 micrometers**:

- OSHA: The legal airborne permissible exposure limit (PEL) is **0.1 fiber/cc** (fiber per cubic centimeter) averaged over an 8-hour workshift and **1 fiber/cc** not to be exceeded during any 15 minute work period.
- NIOSH: The recommended airborne exposure limit is **0.1 fiber/cc** averaged over a 10-hour workshift.
- ACGIH: The recommended airborne exposure limit is **0.1 fiber/cc** averaged over an 8-hour workshift.

- \* **Asbestos** is a **CARCINOGEN** in humans. There may be no safe level of exposure to a carcinogen, so all contact should be reduced to the lowest possible level.

### WAYS OF REDUCING EXPOSURE

- \* Enclose operations and use local exhaust ventilation at the site of chemical release. If local exhaust ventilation or enclosure is not used, respirators should be worn.
- \* A regulated, marked area should be established where **Asbestos** is handled, used, or stored as required by the OSHA Standard 29 CFR 1910.1001.
- \* Wear protective work clothing.
- \* Wash thoroughly when leaving a regulated area and at the end of the workshift.
- \* Post hazard and warning information in the work area. In addition, as part of an ongoing education and training effort, communicate all information on the health and safety hazards of **Asbestos** to potentially exposed workers.

This Fact Sheet is a summary source of information of all potential and most severe health hazards that may result from exposure. Duration of exposure, concentration of the substance and other factors will affect your susceptibility to any of the potential effects described below.

## HEALTH HAZARD INFORMATION

### Acute Health Effects

The following acute (short-term) health effects may occur immediately or shortly after exposure to **Asbestos**:

- \* There are no known acute effects. People who develop serious and fatal disease later in life may feel fine at the time of exposure.

### Chronic Health Effects

The following chronic (long-term) health effects can occur at some time after exposure to **Asbestos** and can last for months or years:

### Cancer Hazard

- \* **Asbestos** is a CARCINOGEN in humans. It has been shown to cause lung cancers (including *mesothelioma*), as well as stomach, colon, rectal, vocal cord and kidney cancers.
- \* Many scientists believe there is no safe level of exposure to a carcinogen.

### Reproductive Hazard

- \* According to the information presently available to the New Jersey Department of Health and Senior Services, **Asbestos** has been tested and has not been shown to affect reproduction.

### Other Long-Term Effects

- \* Repeated exposure to **Asbestos** can cause the disease called *Asbestosis*, a scarring of the lungs that results in changes on chest x-rays. *Asbestosis* develops some years (from seven to thirty) after the period of exposure. Symptoms include cough, shortness of breath and chest pain. It can progress to disability and death. The earlier exposure is stopped, the better the chance of stopping serious disease later.

## MEDICAL

### Medical Testing

Before beginning employment and at least annually after that, the following are recommended:

- \* A medical and work history.
- \* Completion of a standardized questionnaire.
- \* A physical exam focusing on the pulmonary and gastrointestinal systems.
- \* Any other exams or tests suggested by the examining physician.

Any evaluation should include a careful history of past and present symptoms with an exam. Medical tests that look for damage already done are not a substitute for controlling exposure.

Request copies of your medical testing. You have a legal right to this information under OSHA 1910.1020.

### Mixed Exposures

- \* Because smoking can cause heart disease, as well as lung cancer, emphysema, and other respiratory problems, it may worsen respiratory conditions caused by **Asbestos** exposure. Even if you have smoked for a long time, stopping now will reduce your risk of developing health problems.

## WORKPLACE CONTROLS AND PRACTICES

Unless a less toxic chemical can be substituted for a hazardous substance, **ENGINEERING CONTROLS** are the most effective way of reducing exposure. The best protection is to enclose operations and/or provide local exhaust ventilation at the site of chemical release. Isolating operations can also reduce exposure. Using respirators or protective equipment is less effective than the controls mentioned above, but is sometimes necessary.

In evaluating the controls present in your workplace, consider: (1) how hazardous the substance is, (2) how much of the substance is released into the workplace and (3) whether harmful skin or eye contact could occur. Special controls should be in place for highly toxic chemicals or when significant skin, eye, or breathing exposures are possible.

In addition, the following controls are recommended:

- \* Specific engineering controls are required for this chemical by OSHA. Refer to the OSHA Standard for General Industry: 1910.1001, and the OSHA Standard for Construction: 1926.1101.
- \* Substitute the less toxic *mineral wool* and *fiberglass* for **Asbestos** where possible. There are substitutes for almost every use of **Asbestos**.
- \* There are extensive recommended and required engineering and procedural regulations for construction and repair projects involving **Asbestos** material. Before disturbing any **Asbestos** containing materials, contact the NJDHSS for more information.

Good **WORK PRACTICES** can help to reduce hazardous exposures. The following work practices are recommended:

- \* Workers whose clothing has been contaminated by **Asbestos** should change into clean clothing promptly.
- \* Do not take contaminated work clothes home. Family members could be exposed.



- \* Contaminated work clothes should be laundered by individuals who have been informed of the hazards of exposure to **Asbestos**.
- \* Wash any areas of the body that may have contacted **Asbestos**.
- \* Do not eat, smoke, or drink where **Asbestos** is handled, processed, or stored, since the chemical can be swallowed. Wash hands carefully before eating, drinking, smoking, or using the toilet.
- \* Ongoing **Asbestos** abatement projects in sealed areas become very hot and humid. There is a risk of heat stress. You should be trained by your employer to recognize the warning signs and the proper actions to take to avoid seriously dangerous working conditions.
- \* Use a vacuum or a wet method to reduce dust during clean-up. **DO NOT DRY SWEEP**.
- \* When vacuuming, a high efficiency particulate air (HEPA) filter should be used, not a standard shop vacuum.

## PERSONAL PROTECTIVE EQUIPMENT

WORKPLACE CONTROLS ARE BETTER THAN PERSONAL PROTECTIVE EQUIPMENT. However, for some jobs (such as outside work, confined space entry, jobs done only once in a while, or jobs done while workplace controls are being installed), personal protective equipment may be appropriate.

OSHA 1910.132 requires employers to determine the appropriate personal protective equipment for each hazard and to train employees on how and when to use protective equipment.

The following recommendations are only guidelines and may not apply to every situation.

### Clothing

- \* Avoid skin contact with **Asbestos**. Wear protective gloves and clothing. Safety equipment suppliers/manufacturers can provide recommendations on the most protective glove/clothing material for your operation.
- \* Contaminated, disposable, work clothes must be disposed of with **Asbestos** waste.
- \* Non-disposable clothing must be placed in properly labeled plastic bags for laundering or decontamination by the employer.
- \* All protective clothing (suits, gloves, footwear, headgear) should be clean, available each day, and put on before work.

### Eye Protection

- \* Eye protection is included in the recommended respiratory protection.

## Respiratory Protection

**IMPROPER USE OF RESPIRATORS IS DANGEROUS.** Such equipment should only be used if the employer has a written program that takes into account workplace conditions, requirements for worker training, respirator fit testing and medical exams, as described in OSHA 1910.134.

The OSHA Standard 29 CFR 1910.1001 requires the following respiratory protection:

- \* Where the potential exists for exposure over **0.1 fiber/cc**, use a half-mask air purifying respirator equipped with high efficiency filters. Disposable respirators are not permitted.
- \* Where the potential exists for exposure over **1 fiber/cc**, use a full facepiece air purifying respirator equipped with high efficiency filters.
- \* For exposures over **5 fibers/cc**, use a powered air-purifying respirator equipped with high efficiency filters or any supplied air respirator operated in the continuous flow mode.
- \* For exposures over **10 fibers/cc** use a full facepiece supplied air respirator operated in the pressure-demand mode.
- \* If exposures are greater than **100 fibers/cc** use a full facepiece supplied air respirator operated in the pressure-demand mode equipped with an auxiliary positive-pressure self-contained breathing apparatus.
- \* The New Jersey Department of Health and Senior Services recommends that during **Asbestos** abatement projects, when it is impossible to use supplied air or self-contained breathing apparatus, a full facepiece powered air purifying respirator with high efficiency particulate filters be used.

## HANDLING AND STORAGE

- \* Prior to working with **Asbestos** you should be trained on its proper handling and storage.
- \* A regulated, marked area should be established where **Asbestos** is handled, used, or stored.
- \* Airborne **Asbestos** dust is very difficult to remove. It is essential that any area where **Asbestos** is handled be enclosed and isolated. The material should be kept wet with special surfactants and water.
- \* Enclose operations and use local exhaust ventilation with negative pressure air filtration and high efficiency particulate filters in area of **Asbestos** removal. If enclosure with containment "glove" bags is not used for minor repairs, respirators must be worn and proper procedures must be followed.
- \* All **Asbestos** materials must be removed and disposed of according to regulations. The area must be monitored to ensure airborne **Asbestos** levels are below limits prior to reoccupation of the area where **Asbestos** was disturbed.

## QUESTIONS AND ANSWERS

- Q: If I have acute health effects, will I later get chronic health effects?
- A: Not always. Most chronic (long-term) effects result from repeated exposures to a chemical.
- Q: Can I get long-term effects without ever having short-term effects?
- A: Yes, because long-term effects can occur from repeated exposures to a chemical at levels not high enough to make you immediately sick.
- Q: What are my chances of getting sick when I have been exposed to chemicals?
- A: The likelihood of becoming sick from chemicals is increased as the amount of exposure increases. This is determined by the length of time and the amount of material to which someone is exposed.
- Q: When are higher exposures more likely?
- A: Conditions which increase risk of exposure include dust releasing operations (grinding, mixing, blasting, dumping, etc.), other physical and mechanical processes (heating, pouring, spraying, spills and evaporation from large surface areas such as open containers), and "confined space" exposures (working inside vats, reactors, boilers, small rooms, etc.).
- Q: Is the risk of getting sick higher for workers than for community residents?
- A: Yes. Exposures in the community, except possibly in cases of fires or spills, are usually much lower than those found in the workplace. However, people in the community may be exposed to contaminated water as well as to chemicals in the air over long periods. This may be a problem for children or people who are already ill.
- Q: Don't all chemicals cause cancer?
- A: No. Most chemicals tested by scientists are not cancer-causing.

---

The following information is available from:

New Jersey Department of Health and Senior Services  
Occupational Health Service  
PO Box 360  
Trenton, NJ 08625-0360  
(609) 984-1863  
(609) 292-5677 (fax)

Web address: <http://www.state.nj.us/health/eoh/odisweb/>

### **Industrial Hygiene Information**

Industrial hygienists are available to answer your questions regarding the control of chemical exposures using exhaust ventilation, special work practices, good housekeeping, good hygiene practices, and personal protective equipment including respirators. In addition, they can help to interpret the results of industrial hygiene survey data.

### **Medical Evaluation**

If you think you are becoming sick because of exposure to chemicals at your workplace, you may call personnel at the Department of Health and Senior Services, Occupational Health Service, who can help you find the information you need.

### **Public Presentations**

Presentations and educational programs on occupational health or the Right to Know Act can be organized for labor unions, trade associations and other groups.

### **Right to Know Information Resources**

The Right to Know Infoline (609) 984-2202 can answer questions about the identity and potential health effects of chemicals, list of educational materials in occupational health, references used to prepare the Fact Sheets, preparation of the Right to Know survey, education and training programs, labeling requirements, and general information regarding the Right to Know Act. Violations of the law should be reported to (609) 984-2202.

---

## DEFINITIONS

**ACGIH** is the American Conference of Governmental Industrial Hygienists. It recommends upper limits (called TLVs) for exposure to workplace chemicals.

A **carcinogen** is a substance that causes cancer.

The **CAS number** is assigned by the Chemical Abstracts Service to identify a specific chemical.

A **combustible** substance is a solid, liquid or gas that will burn.

A **corrosive** substance is a gas, liquid or solid that causes irreversible damage to human tissue or containers.

**DEP** is the New Jersey Department of Environmental Protection.

**DOT** is the Department of Transportation, the federal agency that regulates the transportation of chemicals.

**EPA** is the Environmental Protection Agency, the federal agency responsible for regulating environmental hazards.

A **fetus** is an unborn human or animal.

A **flammable** substance is a solid, liquid, vapor or gas that will ignite easily and burn rapidly.

The **flash point** is the temperature at which a liquid or solid gives off vapor that can form a flammable mixture with air.

**HHAG** is the Human Health Assessment Group of the federal EPA.

**IARC** is the International Agency for Research on Cancer, a scientific group that classifies chemicals according to their cancer-causing potential.

A **miscible** substance is a liquid or gas that will evenly dissolve in another.

**mg/m<sup>3</sup>** means milligrams of a chemical in a cubic meter of air. It is a measure of concentration (weight/volume).

**MSHA** is the Mine Safety and Health Administration, the federal agency that regulates mining. It also evaluates and approves respirators.

A **mutagen** is a substance that causes mutations. A **mutation** is a change in the genetic material in a body cell. Mutations can lead to birth defects, miscarriages, or cancer.

**NAERG** is the North American Emergency Response Guidebook. It was jointly developed by Transport Canada, the United States Department of Transportation and the Secretariat of Communications and Transportation of Mexico. It is a guide for first responders to quickly identify the specific or generic hazards of material involved in a transportation incident, and to protect themselves and the general public during the initial response phase of the incident.

**NCI** is the National Cancer Institute, a federal agency that determines the cancer-causing potential of chemicals.

**NFPA** is the National Fire Protection Association. It classifies substances according to their fire and explosion hazard.

**NIOSH** is the National Institute for Occupational Safety and Health. It tests equipment, evaluates and approves respirators, conducts studies of workplace hazards, and proposes standards to OSHA.

**NTP** is the National Toxicology Program which tests chemicals and reviews evidence for cancer.

**OSHA** is the Occupational Safety and Health Administration, which adopts and enforces health and safety standards.

**PEOSHA** is the Public Employees Occupational Safety and Health Act, a state law which sets PELs for New Jersey public employees.

**PIH** is a DOT designation for chemicals which are Poison Inhalation Hazards.

**ppm** means parts of a substance per million parts of air. It is a measure of concentration by volume in air.

A **reactive** substance is a solid, liquid or gas that releases energy under certain conditions.

A **teratogen** is a substance that causes birth defects by damaging the fetus.

**TLV** is the Threshold Limit Value, the workplace exposure limit recommended by ACGIH.

The **vapor pressure** is a measure of how readily a liquid or a solid mixes with air at its surface. A higher vapor pressure indicates a higher concentration of the substance in air and therefore increases the likelihood of breathing it in.





# Right to Know Hazardous Substance Fact Sheet

Common Name: **POLYCHLORINATED BIPHENYLS**

Synonyms: Aroclor; Chlorodiphenyls; PCBs

Chemical Name: 1,1'-Biphenyl, Chloro Derivs.

Date: April 2002

Revision: November 2008

CAS Number: 1336-36-3

RTK Substance Number: 1554

DOT Number: UN 2315

## Description and Use

**Polychlorinated Biphenyls** are light yellow or colorless, thick, oily liquids. They are used in hydraulic and heat transfer liquids. They were formally used in electrical capacitors and transformers.

## Reasons for Citation

- **Polychlorinated Biphenyls** are on the Right to Know Hazardous Substance List because they are cited by OSHA, ACGIH, DOT, NIOSH, NTP, DEP, IARC, IRIS, NFPA and EPA.
- This chemical is on the Special Health Hazard Substance List.

SEE GLOSSARY ON PAGE 5.

## FIRST AID

### Eye Contact

- Immediately flush with large amounts of water for at least 15 minutes, lifting upper and lower lids. Remove contact lenses, if worn, while rinsing.

### Skin Contact

- Quickly remove contaminated clothing. Immediately wash contaminated skin with large amounts of soap and water.

### Inhalation

- Remove the person from exposure
- Begin rescue breathing (using universal precautions) if breathing has stopped and CPR if heart action has stopped.
- Transfer promptly to a medical facility.

## EMERGENCY NUMBERS

Poison Control: 1-800-222-1222

CHEMTREC: 1-800-424-9300

NJDEP Hotline: 1-877-927-6337

National Response Center: 1-800-424-8802

EMERGENCY RESPONDERS >>>> SEE PAGE 6

## Hazard Summary

Hazard Rating	NJDHSS	NFPA
HEALTH	3	2
FLAMMABILITY	-	1
REACTIVITY	-	0
CARCINOGEN TERATOGEN POISONOUS GASES ARE PRODUCED IN FIRE		

Hazard Rating Key: 0=minimal; 1=slight; 2=moderate; 3=serious; 4=severe

- **Polychlorinated Biphenyls** can affect you when inhaled and by passing through the skin.
- **Polychlorinated Biphenyls** should be handled as CARCINOGENS and may be TERATOGENS. HANDLE WITH EXTREME CAUTION.
- Contact can irritate the skin and eyes.
- **Polychlorinated Biphenyls** may cause brownish pigmentation of the skin, eyes and fingernails.
- Skin contact may cause an acne-like rash (chloracne).
- Inhaling the vapors can irritate the nose, throat and lungs.
- Exposure to **Polychlorinated Biphenyls** can cause headache, nausea, vomiting, loss of weight and abdominal pain.
- High exposure can damage the nervous system causing headache, numbness, weakness, and tingling ("pins and needles") in the arms and legs.
- **Polychlorinated Biphenyls** may damage the liver.

## Workplace Exposure Limits

OSHA: The legal airborne permissible exposure limit (PEL) is **1 mg/m<sup>3</sup>** (42% Chlorine) and **0.5 mg/m<sup>3</sup>** (54% Chlorine) averaged over an 8-hour workshift.

NIOSH: The recommended airborne exposure limit (REL) is **0.001 mg/m<sup>3</sup>** averaged over a 10-hour workshift.

ACGIH: The threshold limit value (TLV) is **1 mg/m<sup>3</sup>** (42% Chlorine) and **0.5 mg/m<sup>3</sup>** (54% Chlorine) averaged over an 8-hour workshift.

- **Polychlorinated Biphenyls** are PROBABLE CARCINOGENS and TERATOGENS in humans. There may be no safe level of exposure to a carcinogen, so all contact should be reduced to the lowest possible level.
- The above exposure limits are for air levels only. When skin contact also occurs, you may be overexposed, even though air levels are less than the limits listed above.

## Determining Your Exposure

- ▶ Read the product manufacturer's Material Safety Data Sheet (MSDS) and the label to determine product ingredients and important safety and health information about the product mixture.
- ▶ For each individual hazardous ingredient, read the New Jersey Department of Health and Senior Services Hazardous Substance Fact Sheet, available on the RTK Program website ([www.nj.gov/health/eoh/rtkweb](http://www.nj.gov/health/eoh/rtkweb)) or in your facility's RTK Central File or Hazard Communication Standard file.
- ▶ You have a right to this information under the New Jersey Worker and Community Right to Know Act, the Public Employees Occupational Safety and Health (PEOSH) Act if you are a public worker in New Jersey, and under the federal Occupational Safety and Health Act (OSHA) if you are a private worker.
- ▶ The New Jersey Right to Know Act requires most employers to label chemicals in the workplace and requires public employers to provide their employees with information concerning chemical hazards and controls. The federal OSHA Hazard Communication Standard (29 CFR 1910.1200) and the PEOSH Hazard Communication Standard (N.J.A.C. 12:100-7) require employers to provide similar information and training to their employees.

This Fact Sheet is a summary of available information regarding the health hazards that may result from exposure. Duration of exposure, concentration of the substance and other factors will affect your susceptibility to any of the potential effects described below.

## Health Hazard Information

### Acute Health Effects

The following acute (short-term) health effects may occur immediately or shortly after exposure to **Polychlorinated Biphenyls**:

- ▶ Contact can irritate the skin and eyes.
- ▶ Inhaling the vapors can irritate the nose, throat and lungs causing coughing, wheezing and/or shortness of breath.
- ▶ Exposure to **Polychlorinated Biphenyls** can cause headache, nausea, vomiting, loss of weight and abdominal pain.

### Chronic Health Effects

The following chronic (long-term) health effects can occur at some time after exposure to **Polychlorinated Biphenyls** and can last for months or years:

### Cancer Hazard

- ▶ **Polychlorinated Biphenyls** are PROBABLE CARCINOGENS in humans. There is evidence that they cause cancer of the skin, brain, and pancreas in humans and have been shown to cause liver and pituitary cancer, and leukemia, in animals.
- ▶ Many scientists believe there is no safe level of exposure to a carcinogen.

### Reproductive Hazard

- ▶ **Polychlorinated Biphenyls** may be TERATOGENS in humans since they are teratogens in animals.
- ▶ There is limited evidence that **Polychlorinated Biphenyls** may affect male and female fertility.

### Other Effects

- ▶ **Polychlorinated Biphenyls** may cause brownish pigmentation of the skin, eyes and fingernails.
- ▶ Skin contact may cause an acne-like rash (chloracne).
- ▶ High exposure can damage the nervous system causing headache, numbness, weakness, and tingling ("pins and needles") in the arms and legs.
- ▶ **Polychlorinated Biphenyls** may damage the liver.

## Medical

### Medical Testing

Before beginning employment and at regular times after that, for frequent or potentially high exposures, the following are recommended:

- ▶ Liver function tests
- ▶ Exam of the skin and fingernails

If symptoms develop or overexposure is suspected, the following are recommended:

- ▶ Blood PCB levels
- ▶ Exam of the nervous system

Any evaluation should include a careful history of past and present symptoms with an exam. Medical tests that look for damage already done are not a substitute for controlling exposure.

Request copies of your medical testing. You have a legal right to this information under the OSHA Access to Employee Exposure and Medical Records Standard (29 CFR 1910.1020).

### Mixed Exposures

- ▶ More than light alcohol consumption can cause liver damage. Drinking alcohol can increase the liver damage caused by **Polychlorinated Biphenyls**.

### Workplace Controls and Practices

Very toxic chemicals, or those that are reproductive hazards or sensitizers, require expert advice on control measures if a less toxic chemical cannot be substituted. Control measures include: (1) enclosing chemical processes for severely irritating and corrosive chemicals, (2) using local exhaust ventilation for chemicals that may be harmful with a single exposure, and (3) using general ventilation to control exposures to skin and eye irritants. For further information on workplace controls, consult the NIOSH document on Control Banding at [www.cdc.gov/niosh/topics/ctrlbanding/](http://www.cdc.gov/niosh/topics/ctrlbanding/).

The following work practices are also recommended:

- ▶ Label process containers.
- ▶ Provide employees with hazard information and training.
- ▶ Monitor airborne chemical concentrations.
- ▶ Use engineering controls if concentrations exceed recommended exposure levels.
- ▶ Provide eye wash fountains and emergency showers.
- ▶ Wash or shower if skin comes in contact with a hazardous material.
- ▶ Always wash at the end of the workshift.
- ▶ Change into clean clothing if clothing becomes contaminated.
- ▶ Do not take contaminated clothing home.
- ▶ Get special training to wash contaminated clothing.
- ▶ Do not eat, smoke, or drink in areas where chemicals are being handled, processed or stored.
- ▶ Wash hands carefully before eating, smoking, drinking, applying cosmetics or using the toilet.

In addition, the following may be useful or required:

- ▶ Where possible, transfer **Polychlorinated Biphenyls** from drums or other containers to process containers in an enclosed system.

### Personal Protective Equipment

The OSHA Personal Protective Equipment Standard (29 CFR 1910.132) requires employers to determine the appropriate personal protective equipment for each hazard and to train employees on how and when to use protective equipment.

The following recommendations are only guidelines and may not apply to every situation.

#### Gloves and Clothing

- ▶ Avoid skin contact with **Polychlorinated Biphenyls**. Wear personal protective equipment made from material which can not be permeated or degraded by this substance. Safety equipment suppliers and manufacturers can provide recommendations on the most protective glove and clothing material for your operation.
- ▶ Safety equipment manufacturers recommend Butyl, Neoprene, Polyvinyl Chloride, Silver Shield®/4H® and Viton for gloves, and Tychem® CPF 2, SL, CPF 4 and Responder®, or the equivalent, as protective materials for clothing.
- ▶ All protective clothing (suits, gloves, footwear, headgear) should be clean, available each day, and put on before work.

#### Eye Protection

- ▶ Wear indirect-vent, impact and splash resistant goggles when working with liquids.
- ▶ Wear a face shield along with goggles when working with corrosive, highly irritating or toxic substances.

#### Respiratory Protection

**Improper use of respirators is dangerous.** Respirators should only be used if the employer has implemented a written program that takes into account workplace conditions, requirements for worker training, respirator fit testing, and medical exams, as described in the OSHA Respiratory Protection Standard (29 CFR 1910.134).

- ▶ Where the potential exists for exposure over **0.001 mg/m<sup>3</sup>**, use a NIOSH approved supplied-air respirator with a full facepiece operated in a pressure-demand or other positive-pressure mode. For increased protection use in combination with an auxiliary self-contained breathing apparatus operated in a pressure-demand or other positive-pressure mode.
- ▶ Exposure to **5 mg/m<sup>3</sup>** is immediately dangerous to life and health. If the possibility of exposure above **5 mg/m<sup>3</sup>** exists, use a NIOSH approved self-contained breathing apparatus with a full facepiece operated in a pressure-demand or other positive-pressure mode equipped with an emergency escape air cylinder.

### Fire Hazards

If employees are expected to fight fires, they must be trained and equipped as stated in the OSHA Fire Brigades Standard (29 CFR 1910.156).

- ▶ **Polychlorinated Biphenyls** may burn, but do not readily ignite.
- ▶ Use dry chemical, CO<sub>2</sub>, water spray or alcohol-resistant foam as extinguishing agents.
- ▶ POISONOUS GASES ARE PRODUCED IN FIRE, including *Polychlorinated Dibenzofurans* and *Chlorinated Dibenzo-p-dioxins*.
- ▶ Use water spray to keep fire-exposed containers cool.

### Spills and Emergencies

If employees are required to clean-up spills, they must be properly trained and equipped. The OSHA Hazardous Waste Operations and Emergency Response Standard (29 CFR 1910.120) may apply.

If **Polychlorinated Biphenyls** are spilled or leaked, take the following steps:

- ▶ Evacuate personnel and secure and control entrance to the area.
- ▶ Eliminate all ignition sources.
- ▶ Absorb liquids in vermiculite, dry sand, earth, or a similar material and place into sealed containers for disposal.
- ▶ Ventilate and wash area after clean-up is complete.
- ▶ DO NOT wash into sewer.
- ▶ It may be necessary to contain and dispose of **Polychlorinated Biphenyls** as HAZARDOUS WASTE. Contact your state Department of Environmental Protection (DEP) or your regional office of the federal Environmental Protection Agency (EPA) for specific recommendations.

### Handling and Storage

Prior to working with **Polychlorinated Biphenyls** you should be trained on its proper handling and storage.

- ▶ **Polychlorinated Biphenyls** are not compatible with OXIDIZING AGENTS (such as PERCHLORATES, PEROXIDES, PERMANGANATES, CHLORATES, NITRATES, CHLORINE, BROMINE and FLUORINE) and STRONG ACIDS (such as HYDROCHLORIC, SULFURIC and NITRIC).
- ▶ Store in tightly closed containers in a cool, well-ventilated area away from STRONG ULTRAVIOLET LIGHT and SUNLIGHT.

### Occupational Health Information Resources

The New Jersey Department of Health and Senior Services, Occupational Health Service, offers multiple services in occupational health. These services include providing informational resources, educational materials, public presentations, and industrial hygiene and medical investigations and evaluations.

#### For more information, please contact:

New Jersey Department of Health & Senior Services  
Right to Know Program  
PO Box 368  
Trenton, NJ 08625-0368  
Phone: 609-984-2202  
Fax: 609-984-7407  
E-mail: [rtk@doh.state.nj.us](mailto:rtk@doh.state.nj.us)  
Web address: <http://www.nj.gov/health/eoh/rtkweb>

***The Right to Know Hazardous Substance Fact Sheets  
are not intended to be copied and sold  
for commercial purposes.***



## GLOSSARY

**ACGIH** is the American Conference of Governmental Industrial Hygienists. They publish guidelines called Threshold Limit Values (TLVs) for exposure to workplace chemicals.

**Acute Exposure Guideline Levels (AEGLs)** are established by the EPA. They describe the risk to humans resulting from once-in-a lifetime, or rare, exposure to airborne chemicals.

**Boiling point** is the temperature at which a substance can change its physical state from a liquid to a gas.

A **carcinogen** is a substance that causes cancer.

The **CAS number** is unique, identifying number, assigned by the Chemical Abstracts Service, to a specific chemical.

**CFR** is the Code of Federal Regulations, which are the regulations of the United States government.

A **combustible** substance is a solid, liquid or gas that will burn.

A **corrosive** substance is a gas, liquid or solid that causes destruction of human skin or severe corrosion of containers.

**DEP** is the New Jersey Department of Environmental Protection.

**DOT** is the Department of Transportation, the federal agency that regulates the transportation of chemicals.

**EPA** is the Environmental Protection Agency, the federal agency responsible for regulating environmental hazards.

**ERG** is the Emergency Response Guidebook. It is a guide for emergency responders for transportation emergencies involving hazardous substances.

**Emergency Response Planning Guideline (ERPG)** values provide estimates of concentration ranges where one reasonably might anticipate observing adverse effects.

A **fetus** is an unborn human or animal.

A **flammable** substance is a solid, liquid, vapor or gas that will ignite easily and burn rapidly.

The **flash point** is the temperature at which a liquid or solid gives off vapor that can form a flammable mixture with air.

**IARC** is the International Agency for Research on Cancer, a scientific group.

**Ionization Potential** is the amount of energy needed to remove an electron from an atom or molecule. It is measured in electron volts.

**IRIS** is the Integrated Risk Information System database on human health effects that may result from exposure to various chemicals, maintained by federal EPA.

**LEL or Lower Explosive Limit**, is the lowest concentration of a combustible substance (gas or vapor) in the air capable of continuing an explosion.

**mg/m<sup>3</sup>** means milligrams of a chemical in a cubic meter of air. It is a measure of concentration (weight/volume).

A **mutagen** is a substance that causes mutations. A **mutation** is a change in the genetic material in a body cell. Mutations can lead to birth defects, miscarriages, or cancer.

**NFPA** is the National Fire Protection Association. It classifies substances according to their fire and explosion hazard.

**NIOSH** is the National Institute for Occupational Safety and Health. It tests equipment, evaluates and approves respirators, conducts studies of workplace hazards, and proposes standards to OSHA.

**NTP** is the National Toxicology Program which tests chemicals and reviews evidence for cancer.

**OSHA** is the federal Occupational Safety and Health Administration, which adopts and enforces health and safety standards.

**PEOSHA** is the New Jersey Public Employees Occupational Safety and Health Act, which adopts and enforces health and safety standards in public workplaces.

**Permeated** is the movement of chemicals through protective materials.

**ppm** means parts of a substance per million parts of air. It is a measure of concentration by volume in air.

**Protective Action Criteria (PAC)** are values established by the Department of Energy and are based on AEGLs and ERPGs. They are used for emergency planning of chemical release events.

A **reactive** substance is a solid, liquid or gas that releases energy under certain conditions.

**STEL** is a Short Term Exposure Limit which is usually a 15-minute exposure that should not be exceeded at any time during a work day.

A **teratogen** is a substance that causes birth defects by damaging the fetus.

**UEL or Upper Explosive Limit** is the highest concentration in air above which there is too much fuel (gas or vapor) to begin a reaction or explosion.

**Vapor Density** is the ratio of the weight of a given volume of one gas to the weight of another (usually *Hydrogen*), at the same temperature and pressure.

The **vapor pressure** is a force exerted by the vapor in equilibrium with the solid or liquid phase of the same substance. The higher the vapor pressure the higher concentration of the substance in air.

# INFORMATION FOR EMERGENCY RESPONDERS

Page 6 of 6

Common Name: **POLYCHLORINATED BIPHENYLS**

Synonyms: Aroclor; Chlorodiphenyls; PCBs

CAS No: 1336-36-3

Molecular Formula:  $C_{12}H_{10-n}Cl_n$

RTK Substance No: 1554

Description: Light yellow or colorless, thick, oily liquids

## HAZARD DATA

Hazard Rating	Firefighting	Reactivity
<b>3 - Health</b> <b>1 - Fire</b> <b>0 - Reactivity</b> <b>DOT#:</b> UN 2315 <b>ERG Guide #:</b> 171 <b>Hazard Class:</b> 9 (Miscellaneous Hazardous Materials)	<b>Polychlorinated Biphenyls</b> may burn, but do not readily ignite. Use dry chemical, CO <sub>2</sub> , water spray or alcohol-resistant foam as extinguishing agents. POISONOUS GASES ARE PRODUCED IN FIRE, including <i>Polychlorinated Dibenzofurans</i> and <i>Chlorinated Dibenzo-p-dioxins</i> . Use water spray to keep fire-exposed containers cool.	<b>Polychlorinated Biphenyls</b> are not compatible with OXIDIZING AGENTS (such as PERCHLORATES, PEROXIDES, PERMANGANATES, CHLORATES, NITRATES, CHLORINE, BROMINE and FLUORINE) and STRONG ACIDS (such as HYDROCHLORIC, SULFURIC and NITRIC).

## SPILL/LEAKS

### Isolation Distance:

Spills: 50 meters (150 feet)

Fire: 800 meters (1/2 mile)

Absorb liquids in vermiculite, dry sand, earth, or a similar material and place into sealed containers for disposal.

DO NOT wash into sewer.

**Polychlorinated Biphenyls** bioaccumulate and are hazardous to the environment.

## PHYSICAL PROPERTIES

**Flash Point:** 286° to 385°F (141° to 196°C)

**Auto Ignition Temp:** 464°F (240°C)

**Vapor Pressure:** 0.001 mm Hg at 68°F (20°C)

**Specific Gravity:** 1.3 (water = 1)

**Water Solubility:** Insoluble

**Boiling Point:** 617° to 734°F (325° to 390°C)

**Melting Point:** -2° to 50°F (-19° to 10°C)

**Molecular Weight:** 258 to 326

## EXPOSURE LIMITS

**OSHA:** 1 mg/m<sup>3</sup>, 8-hr TWA (42% Chlorine) and 0.5 mg/m<sup>3</sup>, 8-hr TWA (54% Chlorine)

**NIOSH:** 0.001 mg/m<sup>3</sup>, 10-hr TWA

**ACGIH:** 1 mg/m<sup>3</sup>, 8-hr TWA (42% Chlorine) and 0.5 mg/m<sup>3</sup>, 8-hr TWA (54% Chlorine)

**IDLH:** 5 mg/m<sup>3</sup>

## PROTECTIVE EQUIPMENT

**Gloves:** Butyl, Neoprene, Polyvinyl Chloride, Silver Shield®/4H® and Viton (>4-hr breakthrough)

**Coveralls:** Tychem® CPF 2, SL, CPF 4 and Responder® (>8-hr breakthrough)

**Respirator:** >0.001 mg/m<sup>3</sup> - Supplied air or SCBA

## HEALTH EFFECTS

**Eyes:** Irritation

**Skin:** Irritation

**Inhalation:** Nose, throat and lung irritation with coughing, wheezing and shortness of breath

Headache, nausea, vomiting, and abdominal pain

**Chronic:** Cancer (skin, brain, pancreas) in humans

## FIRST AID AND DECONTAMINATION

**Remove** the person from exposure.

**Flush** eyes with large amounts of water for at least 15 minutes. Remove contact lenses if worn.

**Quickly** remove contaminated clothing and wash contaminated skin with large amounts of soap and water.

**Begin** artificial respiration if breathing has stopped and CPR if necessary.

**Transfer** promptly to a medical facility



## New Jersey Department of Health and Senior Services

# HAZARDOUS SUBSTANCE FACT SHEET

Common Name: **TETRACHLOROETHYLENE**

CAS Number: 127-18-4  
DOT Number: UN 1897

RTK Substance number: 1810  
Date: April 1996 Revision: March 2002

### HAZARD SUMMARY

- \* **Tetrachloroethylene** can affect you when breathed in and by passing through your skin.
- \* **Tetrachloroethylene** should be handled as a **CARCINOGEN--WITH EXTREME CAUTION**.
- \* **Tetrachloroethylene** can cause reproductive damage. Handle with extreme caution.
- \* Contact can cause skin irritation, burns and drying and cracking of the skin.
- \* Exposure to **Tetrachloroethylene** can irritate the eyes, nose, mouth and throat.
- \* High exposure can cause headache, dizziness, lightheadedness, nausea, vomiting and even passing out.
- \* Breathing **Tetrachloroethylene** can irritate the lungs causing coughing and/or shortness of breath. Higher exposures can cause a build-up of fluid in the lungs (pulmonary edema), a medical emergency, with severe shortness of breath.
- \* **Tetrachloroethylene** may damage the liver and kidneys and affect the nervous system.

### IDENTIFICATION

**Tetrachloroethylene** is a clear liquid with a sweet *Chloroform*-like odor. It is used in dry cleaning and metal degreasing.

### REASON FOR CITATION

- \* **Tetrachloroethylene** is on the Hazardous Substance List because it is regulated by OSHA and cited by ACGIH, DOT, NIOSH, NTP, DEP, IARC, HHAG, NFPA and EPA.
- \* This chemical is on the Special Health Hazard Substance List because it is a **CARCINOGEN**.
- \* Definitions are provided on page 5.

### HOW TO DETERMINE IF YOU ARE BEING EXPOSED

The New Jersey Right to Know Act requires most employers to label chemicals in the workplace and requires public employers to provide their employees with information and training concerning chemical hazards and controls. The federal OSHA Hazard Communication Standard, 1910.1200, requires private employers to provide similar training and information to their employees.

- \* Exposure to hazardous substances should be routinely evaluated. This may include collecting personal and area air samples. You can obtain copies of sampling results from your employer. You have a legal right to this information under OSHA 1910.1020.
- \* If you think you are experiencing any work-related health problems, see a doctor trained to recognize occupational diseases. Take this Fact Sheet with you.
- \* **ODOR THRESHOLD = 47 ppm.**
- \* The range of accepted odor threshold values is quite broad. Caution should be used in relying on odor alone as a warning of potentially hazardous exposures.

### WORKPLACE EXPOSURE LIMITS

OSHA: The legal airborne permissible exposure limit (PEL) is **100 ppm** averaged over an 8-hour workshift, **200 ppm** not to be exceeded during any 15 minute work period, and **300 ppm** for 5 minutes during any 3 hours.

NIOSH: Recommends that exposure to occupational carcinogens be limited to the lowest feasible concentration.

ACGIH: The recommended airborne exposure limit is **25 ppm** averaged over an 8-hour workshift and **100 ppm** as a STEL (short-term exposure limit).

- \* **Tetrachloroethylene** may be a **CARCINOGEN** in humans. There may be no safe level of exposure to a carcinogen, so all contact should be reduced to the lowest possible level.
- \* The above exposure limits are for air levels only. When skin contact also occurs, you may be overexposed, even though air levels are less than the limits listed above.

### WAYS OF REDUCING EXPOSURE

- \* Where possible, enclose operations and use local exhaust ventilation at the site of chemical release. If local exhaust ventilation or enclosure is not used, respirators should be worn.
- \* Wear protective work clothing.
- \* Wash thoroughly immediately after exposure to **Tetrachloroethylene** and at the end of the workshift.

- \* Post hazard and warning information in the work area. In addition, as part of an ongoing education and training effort, communicate all information on the health and safety hazards of **Tetrachloroethylene** to potentially exposed workers.

This Fact Sheet is a summary source of information of all potential and most severe health hazards that may result from exposure. Duration of exposure, concentration of the substance and other factors will affect your susceptibility to any of the potential effects described below.

## HEALTH HAZARD INFORMATION

### Acute Health Effects

The following acute (short-term) health effects may occur immediately or shortly after exposure to **Tetrachloroethylene**:

- \* Contact can cause skin irritation and burns.
- \* Exposure to **Tetrachloroethylene** can irritate the eyes, nose, mouth and throat.
- \* High exposure can cause headache, dizziness, lightheadedness, nausea, vomiting and even passing out.
- \* Breathing **Tetrachloroethylene** can irritate the lungs causing coughing and/or shortness of breath. Higher exposures can cause a build-up of fluid in the lungs (pulmonary edema), a medical emergency, with severe shortness of breath.

### Chronic Health Effects

The following chronic (long-term) health effects can occur at some time after exposure to **Tetrachloroethylene** and can last for months or years:

### Cancer Hazard

- \* **Tetrachloroethylene** may be a CARCINOGEN in humans since it has been shown to cause liver cancer in animals.
- \* Many scientists believe there is no safe level of exposure to a carcinogen.

### Reproductive Hazard

- \* **Tetrachloroethylene** may damage the developing fetus.

### Other Long-Term Effects

- \* **Tetrachloroethylene** may damage the liver and kidneys and affect the nervous system.
- \* Long-term exposure can cause drying and cracking of the skin.

## MEDICAL

### Medical Testing

For those with frequent or potentially high exposure (half the PEL or greater, or significant skin contact), the following are recommended before beginning work and at regular times after that:

- \* Liver and kidney function tests.
- \* Exam of the nervous system.

If symptoms develop or overexposure is suspected, the following is recommended:

- \* Consider chest x-ray after acute overexposure.

Any evaluation should include a careful history of past and present symptoms with an exam. Medical tests that look for damage already done are not a substitute for controlling exposure.

Request copies of your medical testing. You have a legal right to this information under OSHA 1910.1020.

### Mixed Exposures

- \* Because more than light alcohol consumption can cause liver damage, drinking alcohol can increase the liver damage caused by **Tetrachloroethylene**.
- \* Because smoking can cause heart disease, as well as lung cancer, emphysema, and other respiratory problems, it may worsen respiratory conditions caused by chemical exposure. Even if you have smoked for a long time, stopping now will reduce your risk of developing health problems.

## WORKPLACE CONTROLS AND PRACTICES

Unless a less toxic chemical can be substituted for a hazardous substance, **ENGINEERING CONTROLS** are the most effective way of reducing exposure. The best protection is to enclose operations and/or provide local exhaust ventilation at the site of chemical release. Isolating operations can also reduce exposure. Using respirators or protective equipment is less effective than the controls mentioned above, but is sometimes necessary.

In evaluating the controls present in your workplace, consider: (1) how hazardous the substance is, (2) how much of the substance is released into the workplace and (3) whether harmful skin or eye contact could occur. Special controls should be in place for highly toxic chemicals or when significant skin, eye, or breathing exposures are possible.

In addition, the following control is recommended:

- \* Where possible, automatically pump liquid **Tetrachloroethylene** from drums or other storage containers to process containers.

Good **WORK PRACTICES** can help to reduce hazardous exposures. The following work practices are recommended:

- \* Workers whose clothing has been contaminated by **Tetrachloroethylene** should change into clean clothing promptly.

- \* Contaminated work clothes should be laundered by individuals who have been informed of the hazards of exposure to **Tetrachloroethylene**.
- \* Eye wash fountains should be provided in the immediate work area for emergency use.
- \* If there is the possibility of skin exposure, emergency shower facilities should be provided.
- \* On skin contact with **Tetrachloroethylene**, immediately wash or shower to remove the chemical. At the end of the workshift, wash any areas of the body that may have contacted **Tetrachloroethylene**, whether or not known skin contact has occurred.
- \* Do not eat, smoke, or drink where **Tetrachloroethylene** is handled, processed, or stored, since the chemical can be swallowed. Wash hands carefully before eating, drinking, applying cosmetics, smoking, or using the toilet.

## PERSONAL PROTECTIVE EQUIPMENT

WORKPLACE CONTROLS ARE BETTER THAN PERSONAL PROTECTIVE EQUIPMENT. However, for some jobs (such as outside work, confined space entry, jobs done only once in a while, or jobs done while workplace controls are being installed), personal protective equipment may be appropriate.

OSHA 1910.132 requires employers to determine the appropriate personal protective equipment for each hazard and to train employees on how and when to use protective equipment.

The following recommendations are only guidelines and may not apply to every situation.

### Clothing

- \* Avoid skin contact with **Tetrachloroethylene**. Wear protective gloves and clothing. Safety equipment suppliers/manufacturers can provide recommendations on the most protective glove/clothing material for your operation.
- \* All protective clothing (suits, gloves, footwear, headgear) should be clean, available each day, and put on before work.
- \* ACGIH recommends *Nitrile Rubber*, *Polyvinyl Alcohol* and *Viton* as protective materials.

### Eye Protection

- \* Wear indirect-vent, impact and splash resistant goggles when working with liquids.
- \* Wear a face shield along with goggles when working with corrosive, highly irritating or toxic substances.
- \* Contact lenses should not be worn when working with this substance.

### Respiratory Protection

**IMPROPER USE OF RESPIRATORS IS DANGEROUS.** Such equipment should only be used if the employer has a written program that takes into account workplace conditions, requirements for worker training, respirator fit testing and medical exams, as described in OSHA 1910.134.

- \* Where the potential exists for exposure over **25 ppm**, use a NIOSH approved supplied-air respirator with a full facepiece operated in a pressure-demand or other positive-pressure mode. For increased protection use in combination with an auxiliary self-contained breathing apparatus operated in a pressure-demand or other positive-pressure mode.
- \* Exposure to **150 ppm** is immediately dangerous to life and health. If the possibility of exposure above **150 ppm** exists, use a NIOSH approved self-contained breathing apparatus with a full facepiece operated in a pressure-demand or other positive-pressure mode.

## QUESTIONS AND ANSWERS

- Q: If I have acute health effects, will I later get chronic health effects?
- A: Not always. Most chronic (long-term) effects result from repeated exposures to a chemical.
- Q: Can I get long-term effects without ever having short-term effects?
- A: Yes, because long-term effects can occur from repeated exposures to a chemical at levels not high enough to make you immediately sick.
- Q: What are my chances of getting sick when I have been exposed to chemicals?
- A: The likelihood of becoming sick from chemicals is increased as the amount of exposure increases. This is determined by the length of time and the amount of material to which someone is exposed.
- Q: When are higher exposures more likely?
- A: Conditions which increase risk of exposure include physical and mechanical processes (heating, pouring, spraying, spills and evaporation from large surface areas such as open containers), and "confined space" exposures (working inside vats, reactors, boilers, small rooms, etc.).
- Q: Is the risk of getting sick higher for workers than for community residents?
- A: Yes. Exposures in the community, except possibly in cases of fires or spills, are usually much lower than those found in the workplace. However, people in the community may be exposed to contaminated water as well as to chemicals in the air over long periods. This may be a problem for children or people who are already ill.
- Q: Don't all chemicals cause cancer?
- A: No. Most chemicals tested by scientists are not cancer-causing.
- Q: Should I be concerned if a chemical causes cancer in animals?
- A: Yes. Most scientists agree that a chemical that causes cancer in animals should be treated as a suspected human carcinogen unless proven otherwise.

- Q: But don't they test animals using much higher levels of a chemical than people usually are exposed to?
- A: Yes. That's so effects can be seen more clearly using fewer animals. But high doses alone don't cause cancer unless it's a cancer agent. In fact, a chemical that causes cancer in animals at high doses could cause cancer in humans exposed to low doses.
- Q: Can men as well as women be affected by chemicals that cause reproductive system damage?
- A: Yes. Some chemicals reduce potency or fertility in both men and women. Some damage sperm and eggs, possibly leading to birth defects.
- Q: Who is at the greatest risk from reproductive hazards?
- A: Pregnant women are at greatest risk from chemicals that harm the developing fetus. However, chemicals may affect the ability to have children, so both men and women of childbearing age are at high risk.

---

The following information is available from:

New Jersey Department of Health and Senior Services  
Occupational Health Service  
PO Box 360  
Trenton, NJ 08625-0360  
(609) 984-1863  
(609) 984-7407 (fax)

Web address: <http://www.state.nj.us/health/eoh/odisweb/>

**Industrial Hygiene Information**

Industrial hygienists are available to answer your questions regarding the control of chemical exposures using exhaust ventilation, special work practices, good housekeeping, good hygiene practices, and personal protective equipment including respirators. In addition, they can help to interpret the results of industrial hygiene survey data.

**Medical Evaluation**

If you think you are becoming sick because of exposure to chemicals at your workplace, you may call personnel at the Department of Health and Senior Services, Occupational Health Service, who can help you find the information you need.

**Public Presentations**

Presentations and educational programs on occupational health or the Right to Know Act can be organized for labor unions, trade associations and other groups.

**Right to Know Information Resources**

The Right to Know Infoline (609) 984-2202 can answer questions about the identity and potential health effects of chemicals, list of educational materials in occupational health, references used to prepare the Fact Sheets, preparation of the Right to Know Survey, education and training programs, labeling requirements, and general information regarding the Right to Know Act. Violations of the law should be reported to (609) 984-2202.

---

## DEFINITIONS

**ACGIH** is the American Conference of Governmental Industrial Hygienists. It recommends upper limits (called TLVs) for exposure to workplace chemicals.

A **carcinogen** is a substance that causes cancer.

The **CAS number** is assigned by the Chemical Abstracts Service to identify a specific chemical.

A **combustible** substance is a solid, liquid or gas that will burn.

A **corrosive** substance is a gas, liquid or solid that causes irreversible damage to human tissue or containers.

**DEP** is the New Jersey Department of Environmental Protection.

**DOT** is the Department of Transportation, the federal agency that regulates the transportation of chemicals.

**EPA** is the Environmental Protection Agency, the federal agency responsible for regulating environmental hazards.

A **fetus** is an unborn human or animal.

A **flammable** substance is a solid, liquid, vapor or gas that will ignite easily and burn rapidly.

The **flash point** is the temperature at which a liquid or solid gives off vapor that can form a flammable mixture with air.

**HHAG** is the Human Health Assessment Group of the federal EPA.

**IARC** is the International Agency for Research on Cancer, a scientific group that classifies chemicals according to their cancer-causing potential.

A **miscible** substance is a liquid or gas that will evenly dissolve in another.

**mg/m<sup>3</sup>** means milligrams of a chemical in a cubic meter of air. It is a measure of concentration (weight/volume).

A **mutagen** is a substance that causes mutations. A **mutation** is a change in the genetic material in a body cell. Mutations can lead to birth defects, miscarriages, or cancer.

**NAERG** is the North American Emergency Response Guidebook. It was jointly developed by Transport Canada, the United States Department of Transportation and the Secretariat of Communications and Transportation of Mexico. It is a guide for first responders to quickly identify the specific or generic hazards of material involved in a transportation incident, and to protect themselves and the general public during the initial response phase of the incident.

**NCI** is the National Cancer Institute, a federal agency that determines the cancer-causing potential of chemicals.

**NFPA** is the National Fire Protection Association. It classifies substances according to their fire and explosion hazard.

**NIOSH** is the National Institute for Occupational Safety and Health. It tests equipment, evaluates and approves respirators, conducts studies of workplace hazards, and proposes standards to OSHA.

**NTP** is the National Toxicology Program which tests chemicals and reviews evidence for cancer.

**OSHA** is the Occupational Safety and Health Administration, which adopts and enforces health and safety standards.

**PEL** is the Permissible Exposure Limit which is enforceable by the Occupational Safety and Health Administration.

**PIH** is a DOT designation for chemicals which are Poison Inhalation Hazards.

**ppm** means parts of a substance per million parts of air. It is a measure of concentration by volume in air.

A **reactive** substance is a solid, liquid or gas that releases energy under certain conditions.

A **teratogen** is a substance that causes birth defects by damaging the fetus.

**TLV** is the Threshold Limit Value, the workplace exposure limit recommended by ACGIH.

The **vapor pressure** is a measure of how readily a liquid or a solid mixes with air at its surface. A higher vapor pressure indicates a higher concentration of the substance in air and therefore increases the likelihood of breathing it in.

Common Name: **TETRACHLOROETHYLENE**  
 DOT Number: **UN 1897**  
 NAERG Code: **160**  
 CAS Number: **127-18-4**

Hazard rating	NJDHSS	NFPA
<b>FLAMMABILITY</b>	-	0
<b>REACTIVITY</b>	-	0
CARCINOGEN POISONOUS GASES ARE PRODUCED IN FIRE CONTAINERS MAY EXPLODE IN FIRE		

*Hazard Rating Key: 0=minimal; 1=slight; 2=moderate; 3=serious; 4=severe*

## FIRE HAZARDS

- \* Extinguish fire using an agent suitable for type of surrounding fire. **Tetrachloroethylene** itself does not burn.
- \* POISONOUS GASES ARE PRODUCED IN FIRE, including *Hydrogen Chloride* and *Phosgene*.
- \* CONTAINERS MAY EXPLODE IN FIRE.
- \* Use water spray to keep fire-exposed containers cool.
- \* If employees are expected to fight fires, they must be trained and equipped as stated in OSHA 1910.156.

## SPILLS AND EMERGENCIES

If **Tetrachloroethylene** is spilled or leaked, take the following steps:

- \* Evacuate persons not wearing protective equipment from area of spill or leak until clean-up is complete.
- \* Absorb liquids in vermiculite, dry sand, earth, or a similar material and deposit in sealed containers.
- \* Ventilate and wash area after clean-up is complete.
- \* It may be necessary to contain and dispose of **Tetrachloroethylene** as a HAZARDOUS WASTE. Contact your state Department of Environmental Protection (DEP) or your regional office of the federal Environmental Protection Agency (EPA) for specific recommendations.
- \* If employees are required to clean-up spills, they must be properly trained and equipped. OSHA 1910.120(q) may be applicable.

FOR LARGE SPILLS AND FIRES immediately call your fire department. You can request emergency information from the following:

CHEMTREC: (800) 424-9300  
NJDEP HOTLINE: 1-877-WARN-DEP

## HANDLING AND STORAGE

- \* Prior to working with **Tetrachloroethylene** you should be trained on its proper handling and storage.
- \* **Tetrachloroethylene** is not compatible with OXIDIZING AGENTS (such as PERCHLORATES, PEROXIDES, PERMANGANATES, CHLORATES, NITRATES, CHLORINE, BROMINE and FLUORINE); CHEMICALLY ACTIVE METALS (such as POTASSIUM, SODIUM, MAGNESIUM and ZINC); STRONG BASES (such as SODIUM HYDROXIDE and POTASSIUM HYDROXIDE); LITHIUM; BERYLLIUM; and BARIUM.
- \* Store in tightly closed containers in a cool, well-ventilated area away from HEAT.

## FIRST AID

*For POISON INFORMATION call 1-800-222-1222*

## Eye Contact

- \* Immediately flush with large amounts of water for at least 15 minutes, occasionally lifting upper and lower lids. Seek medical attention.

## Skin Contact

- \* Quickly remove contaminated clothing. Immediately wash area with large amounts of soap and water. Seek medical attention.

## Breathing

- \* Remove the person from exposure.
- \* Begin rescue breathing (using universal precautions) if breathing has stopped and CPR if heart action has stopped.
- \* Transfer promptly to a medical facility.
- \* Medical observation is recommended for 24 to 48 hours after breathing overexposure, as pulmonary edema may be delayed.

## PHYSICAL DATA

**Vapor Pressure:** 14 mm Hg at 68°F (20°C)

**Water Solubility:** Insoluble

### OTHER COMMONLY USED NAMES

**Chemical Name:**

Ethene, Tetrachloro-

**Other Names:**

Perchloroethylene; PERC; Ethylene Tetrachloride

*Not intended to be copied and sold for commercial purposes.*

NEW JERSEY DEPARTMENT OF HEALTH AND  
SENIOR SERVICES

## Right to Know Program

PO Box 368, Trenton, NJ 08625-0368  
(609) 984-2202

H5027





# Right to Know Hazardous Substance Fact Sheet

Common Name: **LEAD**

Synonym: Metallic Lead

Chemical Name: Lead

Date: September 2001 Revision: September 2007

CAS Number: 7439-92-1

RTK Substance Number: 1096

DOT Number: UN 3077

## Description and Use

**Lead** is a heavy, soft, silvery-gray metal. It is used in the production of storage batteries, ammunition, cable covering, pigments, glass, ceramic glazes, casting metals, and solders.

## Reasons for Citation

- ▶ **Lead** is on the Right to Know Hazardous Substance List because it is cited by OSHA, ACGIH, DOT, NIOSH, NTP, DEP, IARC, IRIS and EPA.
- ▶ This chemical is on the Special Health Hazard Substance List.

SEE GLOSSARY ON PAGE 5.

## FIRST AID

### Eye Contact

- ▶ Immediately flush with large amounts of cool water for at least 15 minutes, lifting upper and lower lids. Remove contact lenses, if worn, while rinsing.

### Skin Contact

- ▶ Remove contaminated clothing. Wash contaminated skin with soap and water.

### Inhalation

- ▶ Remove the person from exposure.
- ▶ Begin rescue breathing (using universal precautions) if breathing has stopped and CPR if heart action has stopped.
- ▶ Transfer promptly to a medical facility.

## EMERGENCY NUMBERS

Poison Control: 1-800-222-1222

CHEMTREC: 1-800-424-9300

NJDEP Hotline: 1-877-927-6337

National Response Center: 1-800-424-8802

## EMERGENCY RESPONDERS >>>> SEE PAGE 6

### Hazard Summary

Hazard Rating	NJDHSS	NFPA
HEALTH	4	-
FLAMMABILITY	0	-
REACTIVITY	0	-
CARCINOGEN TERATOGEN POISONOUS FUMES ARE PRODUCED IN FIRE DOES NOT BURN		

Hazard Rating Key: 0=minimal; 1=slight; 2=moderate; 3=serious; 4=severe

- ▶ **Lead** can affect you when inhaled or swallowed.
- ▶ **Lead** is a CARCINOGEN and may be a TERATOGEN. HANDLE WITH EXTREME CAUTION.
- ▶ Contact can irritate the eyes.
- ▶ Exposure can cause headache, irritability, and muscle and joint pain.
- ▶ Repeated exposure can cause *Lead poisoning* with metallic taste, colic and muscle cramps.
- ▶ **Lead** may damage the nervous system.
- ▶ Exposure may cause kidney and brain damage, and anemia.

## Workplace Exposure Limits

OSHA: The legal airborne permissible exposure limit (PEL) is **0.05 mg/m<sup>3</sup>** averaged over an 8-hour workshift.

NIOSH: The recommended airborne exposure limit (REL) is **0.05 mg/m<sup>3</sup>** averaged over a 10-hour workshift. Air concentrations should be maintained so that blood **Lead** is less than **0.06 mg per 100 grams** of whole blood.

ACGIH: The threshold limit value (TLV) is **0.05 mg/m<sup>3</sup>** averaged over an 8-hour workshift.

- ▶ **Lead** is a PROBABLE CARCINOGEN in humans and may be a TERATOGEN in humans. There may be no safe level of exposure to a carcinogen, so all contact should be reduced to the lowest possible level.

## Determining Your Exposure

- ▶ Read the product manufacturer's Material Safety Data Sheet (MSDS) and the label to determine product ingredients and important safety and health information about the product mixture.
- ▶ For each individual hazardous ingredient, read the New Jersey Department of Health and Senior Services Hazardous Substance Fact Sheet, available on the RTK Program website ([www.nj.gov/health/eoh/rtkweb](http://www.nj.gov/health/eoh/rtkweb)) or in your facility's RTK Central File or Hazard Communication Standard file.
- ▶ You have a right to this information under the New Jersey Worker and Community Right to Know Act, the Public Employees Occupational Safety and Health (PEOSH) Act if you are a public worker in New Jersey, and under the federal Occupational Safety and Health Act (OSHA) if you are a private worker.
- ▶ The New Jersey Right to Know Act requires most employers to label chemicals in the workplace and requires public employers to provide their employees with information concerning chemical hazards and controls. The federal OSHA Hazard Communication Standard (29 CFR 1910.1200) requires private employers to provide similar information and training to their employees.

This Fact Sheet is a summary of available information regarding the health hazards that may result from exposure. Duration of exposure, concentration of the substance and other factors will affect your susceptibility to any of the potential effects described below.

## Health Hazard Information

### Acute Health Effects

The following acute (short-term) health effects may occur immediately or shortly after exposure to **Lead**:

- ▶ Contact can irritate the eyes.
- ▶ **Lead** can cause headache, irritability, reduced memory, disturbed sleep, and mood and personality changes.
- ▶ Exposure can cause upset stomach, poor appetite, weakness and fatigue.

### Chronic Health Effects

The following chronic (long-term) health effects can occur at some time after exposure to **Lead** and can last for months or years:

### Cancer Hazard

- ▶ **Lead** is a PROBABLE CARCINOGEN in humans. There is some evidence that **Lead** and *Lead compounds* cause lung, stomach, brain and kidney cancers in humans and they have been shown to cause kidney cancer in animals.
- ▶ Many scientists believe there is no safe level of exposure to a carcinogen.

### Reproductive Hazard

- ▶ **Lead** may be a TERATOGEN in humans since it is a teratogen in animals.
- ▶ It may decrease fertility in males and females, and damage the developing fetus and the testes (male reproductive glands).

### Other Effects

- ▶ Repeated exposure to **Lead** can cause *Lead poisoning*. Symptoms include metallic taste, poor appetite, weight loss, colic, nausea, vomiting, and muscle cramps.
- ▶ Higher levels can cause muscle and joint pain, and weakness.
- ▶ High or repeated exposure may damage the nerves causing weakness, "pins and needles," and poor coordination in the arms and legs.
- ▶ **Lead** exposure increases the risk of high blood pressure.
- ▶ **Lead** may cause kidney and brain damage, and damage to the blood cells causing anemia.
- ▶ Repeated exposure causes **Lead** to accumulate in the body. It can take years for the body to get rid of excess **Lead**.

## Medical

### Medical Testing

Before first exposure, and every six (6) months thereafter, OSHA requires your employer to provide (for persons exposed to **30 micrograms** or more of **Lead per cubic meter** of air):

- ▶ Blood *Lead* test
- ▶ ZPP (a special test for the effects of *Lead* on blood cells)

For employees with blood *Lead* levels above **40 micrograms per 100 grams** of whole blood (**40 micrograms per deciliter**), OSHA requires blood *Lead* level monitoring every two months until two consecutive blood *Lead* levels are below **40 micrograms per 100 grams** of whole blood. These employees must undergo a medical evaluation, which should include:

- ▶ Complete work and medical history
- ▶ Thorough physical examination, including examination of the central nervous system
- ▶ Blood *Lead* test
- ▶ ZPP
- ▶ Hemoglobin, hematocrit with complete blood count
- ▶ Urinalysis with microscopic examination
- ▶ Any other tests determined necessary by the examining physician

This evaluation should be performed at least annually.

OSHA requires your employer to provide you and your doctor with a copy of the OSHA Lead Standards (29 CFR 1910.1025 and 1926.62).

Any evaluation should include a careful history of past and present symptoms with an exam. Medical tests that look for damage already done are not a substitute for controlling exposure.

Request copies of your medical testing. You have a legal right to this information under the OSHA Access to Employee Exposure and Medical Records Standard (29 CFR 1910.1020).

### Mixed Exposures

Body exposures to *Lead* from hobbies using *Lead* solder or pigments, target practice, and drinking moonshine made in *Leaded* containers will increase *Lead* levels. Repeated breathing or handling of *Leaded* gasoline may also add to body *Lead* levels.

### Workplace Controls and Practices

Very toxic chemicals, or those that are reproductive hazards or sensitizers, require expert advice on control measures if a less toxic chemical cannot be substituted. Control measures include: (1) enclosing chemical processes for severely irritating and corrosive chemicals, (2) using local exhaust ventilation for chemicals that may be harmful with a single exposure, and (3) using general ventilation to control exposures to skin and eye irritants. For further information on workplace controls, consult the NIOSH document on Control Banding at [www.cdc.gov/niosh/topics/ctrlbanding/](http://www.cdc.gov/niosh/topics/ctrlbanding/).

The following work practices are also recommended:

- ▶ Label process containers.
- ▶ Provide employees with hazard information and training.
- ▶ Monitor airborne chemical concentrations.
- ▶ Use engineering controls if concentrations exceed recommended exposure levels.
- ▶ Provide eye wash fountains and emergency showers.
- ▶ Wash or shower if skin comes in contact with a hazardous material.
- ▶ Always wash at the end of the workshift.
- ▶ Change into clean clothing if clothing becomes contaminated.
- ▶ Do not take contaminated clothing home.
- ▶ Get special training to wash contaminated clothing.
- ▶ Do not eat, smoke, or drink in areas where chemicals are being handled, processed or stored.
- ▶ Wash hands carefully before eating, smoking, drinking, applying cosmetics or using the toilet.

In addition, the following may be useful or required:

- ▶ Specific engineering controls are required for this chemical by OSHA. Refer to the OSHA **Lead** Standards (29 CFR 1910.1025 and 1926.62).
- ▶ Use a vacuum or a wet method to reduce dust during clean-up. **DO NOT DRY SWEEP.**
- ▶ Use a high efficiency particulate air (HEPA) filter when vacuuming. Do not use a standard shop vacuum.

### Personal Protective Equipment

The OSHA Personal Protective Equipment Standard (29 CFR 1910.132) requires employers to determine the appropriate personal protective equipment for each hazard and to train employees on how and when to use protective equipment.

The following recommendations are only guidelines and may not apply to every situation.

### Gloves and Clothing

- ▶ Avoid skin contact with **Lead**. Wear personal protective equipment made from material which can not be permeated and/or degraded by this substance. Safety equipment suppliers/manufacturers can provide recommendations on the most protective glove/clothing material for your operation.
- ▶ Safety equipment manufacturers recommend *Nitrile*, *Latex*, or *Rubber* for gloves and DuPont *Tyvek*® as protective material for clothing.
- ▶ All protective clothing (suits, gloves, footwear, headgear) should be clean, available each day, and put on before work.

### Eye Protection

- ▶ Wear non-vented, impact resistant goggles when working with fumes, gases, or vapors.
- ▶ For impact hazards (such as flying fragments, chips or particles), wear safety glasses with side shields or safety goggles.
- ▶ Wear a face shield along with goggles when working with corrosive, highly irritating or toxic substances.

### Respiratory Protection

**Improper use of respirators is dangerous.** Respirators should only be used if the employer has a written program that takes into account workplace conditions, requirements for worker training, respirator fit testing, and medical exams, as described in the OSHA Respiratory Protection Standard (29 CFR 1910.134).

- ▶ Where the potential exists for exposure not higher than **0.5 mg/m<sup>3</sup>**, use a half-mask air purifying respirator equipped with high efficiency filters.
- ▶ Where the potential exists for exposure not higher than **2.5 mg/m<sup>3</sup>**, use a full facepiece, air purifying respirator with high efficiency filters.
- ▶ Where the potential exists for exposure not higher than **50 mg/m<sup>3</sup>**, use any powered-air purifying respirator with high efficiency filters or a half-mask supplied-air respirator operated in a positive pressure mode.
- ▶ Leave the area immediately if (1) while wearing a filter or cartridge respirator you can smell, taste, or otherwise detect **Lead**, (2) while wearing particulate filters abnormal resistance to breathing is experienced, or (3) eye irritation occurs while wearing a full facepiece respirator. Check to make sure the respirator-to-face seal is still good. If it is, replace the filter or cartridge. If the seal is no longer good, you may need a new respirator.
- ▶ Be sure to consider all potential sources of exposure in your workplace. You may need a combination of filters, prefilters or cartridges to protect against different forms of a chemical (such as vapor and mist) or against a mixture of chemicals.
- ▶ Where the potential exists for exposure greater than **50 mg/m<sup>3</sup>** but less than **100 mg/m<sup>3</sup>**, use supplied-air respirators with full facepiece, hood, helmet or suit, operated in a positive pressure mode.
- ▶ Where the potential exists for exposure greater than **100 mg/m<sup>3</sup>**, use full facepiece, self-contained breathing apparatus operated in a positive pressure mode.

### Fire Hazards

If employees are expected to fight fires, they must be trained and equipped as stated in the OSHA Fire Brigades Standard (29 CFR 1910.156).

- ▶ Extinguish fire using an agent suitable for type of surrounding fire. **Lead** itself does not burn.
- ▶ POISONOUS FUMES ARE PRODUCED IN FIRE, including *Lead Oxides*.
- ▶ Use water spray to keep fire-exposed containers cool.

### Spills and Emergencies

If employees are required to clean-up spills, they must be properly trained and equipped. The OSHA Hazardous Waste Operations and Emergency Response Standard (29 CFR 1910.120) may apply.

If **Lead** is spilled, take the following steps:

- ▶ Evacuate personnel and secure and control entrance to the area.
- ▶ Eliminate all ignition sources.
- ▶ Collect spilled material using a HEPA-filter vacuum and deposit into sealed containers.
- ▶ Ventilate and wash area after clean-up is complete.
- ▶ It may be necessary to contain and dispose of **Lead** as a HAZARDOUS WASTE. Contact your state Department of Environmental Protection (DEP) or your regional office of the federal Environmental Protection Agency (EPA) for specific recommendations.

### Handling and Storage

Prior to working with **Lead** you should be trained on its proper handling and storage.

- ▶ A regulated, marked area should be established where **Lead** is handled, used, or stored.
- ▶ **Lead** reacts violently with HYDROGEN PEROXIDE; AMMONIUM NITRATE; ZIRCONIUM; SODIUM AZIDE; SODIUM ACETYLIDE; and CHLORINE TRIFLUORIDE.
- ▶ **Lead** is not compatible with OXIDIZING AGENTS (such as PERCHLORATES, PEROXIDES, PERMANGANATES, CHLORATES, NITRATES, CHLORINE, BROMINE and FLUORINE) and STRONG ACIDS (such as HYDROCHLORIC, SULFURIC and NITRIC).
- ▶ Store in tightly closed containers in a cool, well-ventilated area.

### Occupational Health Services Resources

The New Jersey Department of Health and Senior Services, Occupational Health Service, offers multiple services in occupational health. These services include providing informational resources, educational materials, public presentations, and industrial hygiene and medical investigations and evaluations.

#### For more information, please contact:

New Jersey Department of Health & Senior Services  
Right to Know Program  
PO Box 368  
Trenton, NJ 08625-0368  
Phone: 609-984-2202  
Fax: 609-984-7407  
E-mail: [rtk@doh.state.nj.us](mailto:rtk@doh.state.nj.us)  
Web address: <http://www.nj.gov/health/eoh/rtkweb>

***The Right to Know Hazardous Substance Fact Sheets  
are not intended to be copied and sold  
for commercial purposes.***

## GLOSSARY

**ACGIH** is the American Conference of Governmental Industrial Hygienists. They publish guidelines called Threshold Limit Values (TLVs) for exposure to workplace chemicals.

**Boiling point** is the temperature at which a substance can change its physical state from a liquid to a gas.

A **carcinogen** is a substance that causes cancer.

The **CAS number** is unique, identifying number, assigned by the Chemical Abstracts Service, to a specific chemical.

**CFR** is the Code of Federal Regulations, which are the regulations of the United States government.

A **combustible** substance is a solid, liquid or gas that will burn.

A **corrosive** substance is a gas, liquid or solid that causes destruction of human skin or severe corrosion of containers.

**DEP** is the New Jersey Department of Environmental Protection.

**DOT** is the Department of Transportation, the federal agency that regulates the transportation of chemicals.

**EPA** is the Environmental Protection Agency, the federal agency responsible for regulating environmental hazards.

A **fetus** is an unborn human or animal.

A **flammable** substance is a solid, liquid, vapor or gas that will ignite easily and burn rapidly.

The **flash point** is the temperature at which a liquid or solid gives off vapor that can form a flammable mixture with air.

**IARC** is the International Agency for Research on Cancer, a scientific group.

**Ionization Potential** is the amount of energy needed to remove an electron from an atom or molecule. It is measured in electron volts.

**IRIS** is the Integrated Risk Information System database by federal EPA. The database contains information on human health effects that may result from exposure to various chemicals in the environment.

**LEL** or **Lower Explosive Limit**, is the lowest concentration of a combustible substance (gas or vapor) in the air capable of continuing an explosion.

**mg/m<sup>3</sup>** means milligrams of a chemical in a cubic meter of air. It is a measure of concentration (weight/volume).

A **mutagen** is a substance that causes mutations. A **mutation** is a change in the genetic material in a body cell. Mutations can lead to birth defects, miscarriages, or cancer.

**NAERG** is the North American Emergency Response Guidebook. It is a guide for emergency responders for transportation emergencies involving hazardous substances.

**NFPA** is the National Fire Protection Association. It classifies substances according to their fire and explosion hazard.

**NIOSH** is the National Institute for Occupational Safety and Health. It tests equipment, evaluates and approves respirators, conducts studies of workplace hazards, and proposes standards to OSHA.

**NTP** is the National Toxicology Program which tests chemicals and reviews evidence for cancer.

**OSHA** is the federal Occupational Safety and Health Administration, which adopts and enforces health and safety standards.

**PEOSHA** is the New Jersey Public Employees Occupational Safety and Health Act, which adopts and enforces health and safety standards in public workplaces.

**Permeated** is the movement of chemicals through protective materials.

**PIH** is a DOT designation for chemicals which are Poison Inhalation Hazards.

**ppm** means parts of a substance per million parts of air. It is a measure of concentration by volume in air.

A **reactive** substance is a solid, liquid or gas that releases energy under certain conditions.

**STEL** is a Short Term Exposure Limit which is usually a 15-minute exposure that should not be exceeded at any time during a work day.

A **teratogen** is a substance that causes birth defects by damaging the fetus.

**UEL** or **Upper Explosive Limit** is the highest concentration in air above which there is too much fuel (gas or vapor) to begin a reaction or explosion.

**Vapor Density** is the ratio of the weight of a given volume of one gas to the weight of another (usually *Hydrogen*), at the same temperature and pressure.

The **vapor pressure** is a measure of how readily a liquid or a solid mixes with air at its surface. A higher vapor pressure indicates a higher concentration of the substance in air and therefore increases the likelihood of breathing it in.

Common Name: **LEAD**

Synonym: Metallic Lead

CAS No: 7439-92-1

 Molecular Formula:  $Pb_2$ 

RTK Substance No: 1096

Description: Heavy, soft, silvery-gray metal

**HAZARD DATA**

Hazard Rating	Firefighting	Reactivity
<b>4 - Health</b> <b>0 - Fire</b> <b>0 - Reactivity</b> DOT#: UN 3077 ERG Guide #: 171 Hazard Class: 9 (Environmentally Hazardous Substance)	Extinguish fire using an agent suitable for type of surrounding fire. <b>Lead</b> itself does not burn. POISONOUS FUMES ARE PRODUCED IN FIRE, including <i>Lead Oxides</i> . Use water spray to keep fire-exposed containers cool.	<b>Lead</b> reacts violently with HYDROGEN PEROXIDE; AMMONIUM NITRATE; ZIRCONIUM; SODIUM AZIDE; SODIUM ACETYLIDE; and CHLORINE TRIFLUORIDE. <b>Lead</b> is not compatible with OXIDIZING AGENTS (such as PERCHLORATES, PEROXIDES, PERMANGANATES, CHLORATES, NITRATES, CHLORINE, BROMINE and FLUORINE) and STRONG ACIDS (such as HYDROCHLORIC, SULFURIC and NITRIC).

**SPILL/LEAKS**

**Isolation Distance:** 10 to 25 meters  
 (30 to 80 feet)  
 Use a HEPA-filter vacuum for clean-up.  
 Toxic to aquatic organisms.  
 Hazardous to the environment and persists in the environment.

**PHYSICAL PROPERTIES**

**Odor Threshold:** No odor  
**Flash Point:** Not combustible  
**LEL:** N/A  
**UEL:** N/A  
**Specific Gravity:** 11.35 at 68°F (20°C)  
**Vapor Pressure:** 0 mm Hg at 68°F (20°C)  
**Water Solubility:** Insoluble  
**Boiling Point:** 3,164°F (1,740°C)  
**Melting Point:** 621.5°F (327.5°C)

**EXPOSURE LIMITS**

**OSHA:** 0.05 mg/m<sup>3</sup>, 8-hr TWA  
**NIOSH:** 0.05 mg/m<sup>3</sup>, 10-hr TWA  
**ACGIH:** 0.05 mg/m<sup>3</sup>, 8-hr TWA  
**IDLH LEVEL:** 100 mg/m<sup>3</sup>

**PROTECTIVE EQUIPMENT**

**Gloves:** Nitrile, Latex, Rubber  
**Coveralls:** DuPont Tyvek®  
**Boots:** Latex, Butyl, Neoprene  
**Respirator:** <0.5 mg/m<sup>3</sup> - N100  
 >0.5 mg/m<sup>3</sup> - full facepiece APR with High Efficiency filters  
 >50 mg/m<sup>3</sup> but ≤100 mg/m<sup>3</sup> Supplied Air

**HEALTH EFFECTS**

**Eyes:** Irritation  
**Skin:** No Information  
**Acute:** Headache, irritability, upset stomach, and weakness  
**Chronic:** *Lead* may cause lung, brain, stomach, and kidney cancer in humans.  
 Metallic taste, colic, muscle cramps  
 Damage to the nervous system

**FIRST AID AND DECONTAMINATION**

**Remove** the person from exposure.  
**Flush** eyes with large amounts of water for at least 15 minutes. Remove contact lenses if worn.  
**Remove** contaminated clothing and wash contaminated skin with soap and water.  
**Transfer** to a medical facility.

MSDS # 84.00

**Barium Metal****Section 1: Product and Company Identification****Barium Metal****Synonyms/General Names:** Barium**Product Use:** For educational use only**Manufacturer:** Columbus Chemical Industries, Inc., Columbus, WI 53925.**24 Hour Emergency Information Telephone Numbers****CHEMTREC (USA): 800-424-9300****CANUTEC (Canada): 613-424-6666**

Scholar Chemistry; 5100 W. Henrietta Rd, Rochester, NY 14586; (866) 260-0501; www.Scholarchemistry.com

**Section 2: Hazards Identification***Soft, silvery, lustrous metal immersed in heavy mineral oil; no odor.***HMIS (0 to 4)**

<b>Health</b>	<b>3</b>
<b>Fire Hazard</b>	<b>3</b>
<b>Reactivity</b>	<b>2</b>

**WARNING!** Flammable solid, dangerous when wet, highly toxic by ingestion.

Flammable solid, keep away from all ignition sources. Contact with water produces flammable gas.

Target organs: Central nervous system, kidneys.

This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

**Section 3: Composition / Information on Ingredients**

Barium Metal (7440-39-3), 100%

**Section 4: First Aid Measures***Always seek professional medical attention after first aid measures are provided.***Eyes:** Immediately flush eyes with excess water for 15 minutes, lifting lower and upper eyelids occasionally.**Skin:** Immediately flush skin with excess water for 15 minutes while removing contaminated clothing.**Ingestion:** Call Poison Control immediately. Rinse mouth with cold water. Give victim 1-2 tbsp of activated charcoal mixed with 8 oz water.**Inhalation:** Remove to fresh air. If not breathing, give artificial respiration.**Section 5: Fire Fighting Measures**

Flammable solid. When heated to decomposition, emits acrid fumes and explosive hydrogen gas.

**Protective equipment and precautions for firefighters:** Do Not Use carbon dioxide, foam, water or halogenated extinguishing agents. Use class D extinguisher or smother with dry sand, dry clay, dry ground limestone or dry graphite. Firefighters should wear full fire fighting turn-out gear and respiratory protection (SCBA). Material is not sensitive to mechanical impact or static discharge.**Section 6: Accidental Release Measures**

Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all ignition sources and ventilate area. Sweep up spill and place material in a dry container for disposal. See Section 13 for disposal information.

**Section 7: Handling and Storage****Red****Handling:** Use with adequate ventilation and do not breathe dust or vapor. Avoid contact with skin, eyes, or clothing. Wash hands thoroughly after handling.**Storage:** Store in Flammable Area [Red Storage] with other flammable materials and away from any strong oxidizers. Store in a dedicated flammables cabinet. Store in a cool, dry, well-ventilated, locked store room away from incompatible materials.**Section 8: Exposure Controls / Personal Protection**Use ventilation to keep airborne concentrations below exposure limits. Have approved eyewash facility, safety shower, and fire extinguishers readily available. Wear chemical splash goggles and chemical resistant clothing such as gloves and aprons. Wash hands thoroughly after handling material and before eating or drinking. Use NIOSH-approved respirator with a dust cartridge. Exposure guidelines: Barium compounds: OSHA PEL: 0.5 mg/m<sup>3</sup> and ACGIH TLV: 0.5 mg/m<sup>3</sup>, STEL: N/A.

## Section 9: Physical and Chemical Properties

<b>Molecular formula</b>	Ba.	<b>Appearance</b>	Silver metal in heavy mineral oil.
<b>Molecular weight</b>	137.33.	<b>Odor</b>	No odor.
<b>Specific Gravity</b>	3.62 g/mL @ 20°C..	<b>Odor Threshold</b>	N/A.
<b>Vapor Density (air=1)</b>	N/A.	<b>Solubility</b>	Reacts violently with water.
<b>Melting Point</b>	850°C.	<b>Evaporation rate</b>	N/A ( <i>Butyl acetate</i> = 1).
<b>Boiling Point/Range</b>	1695°C.	<b>Partition Coefficient</b>	N/A ( <i>log P<sub>OW</sub></i> ).
<b>Vapor Pressure (20°C)</b>	N/A.	<b>pH</b>	N/A.
<b>Flash Point:</b>	N/A.	<b>UEL</b>	N/A.
<b>Autoignition Temp.:</b>	N/A.	<b>LEL</b>	N/A.

N/A = Not available or applicable

## Section 10: Stability and Reactivity

Avoid heat and ignition sources

**Stability:** Stable under normal conditions of use.

**Incompatibility:** Water, acids, chlorine, iodine, bromine and oxidizing agents.

**Shelf life:** Indefinite if stored properly.

## Section 11: Toxicology Information

**Acute Symptoms/Signs of exposure:** *Eyes:* Stinging pain, burns, watering of eyes, inflammation of eyelids and conjunctivitis. Avoid looking at burning magnesium. *Skin:* Irritation, redness, burns. Powdered metal ignites readily on skin causing burns. *Ingestion:* Nausea, vomiting and headache. *Inhalation:* Rapid irregular breathing, headache, burns to mucous membranes. Inhalation of dust or fumes causes metal fume fever.

**Chronic Effects:** Repeated/prolonged skin contact may cause dryness or rashes.

**Sensitization:** none expected

*Barium:* LD50 [oral, rat]; Not Available; LC50 [rat]; Not Available; LD50 Dermal [rabbit]; Not Available

*Material has not been found to be a carcinogen nor produce genetic, reproductive, or developmental effects.*

## Section 12: Ecological Information

**Ecotoxicity (aquatic and terrestrial):** LC50 – 500mg/l – 96h – Cyprinodon variegatus.

## Section 13: Disposal Considerations

Check with all applicable local, regional, and national laws and regulations. Local regulations may be more stringent than regional or national regulations. Use a licensed chemical waste disposal firm for proper disposal.

## Section 14: Transport Information

<b>DOT Shipping Name:</b>	Barium.	<b>Canada TDG:</b>	Barium .
<b>DOT Hazard Class:</b>	4.3, pg II.	<b>Hazard Class:</b>	4.3, pg II.
<b>Identification Number:</b>	UN1400.	<b>UN Number:</b>	UN1400.

## Section 15: Regulatory Information

**EINECS:** Listed (231-149.1) .

**WHMIS Canada:** B6:D2B: Reactive Flammable: Toxic Material.

**TSCA:** All components are listed or are exempt.

**California Proposition 65:** Not listed.


*The product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.*

## Section 16: Other Information

**Current Issue Date:** December 19, 2011

*Disclaimer: Scholar Chemistry and Columbus Chemical Industries, Inc., ("S&C") believes that the information herein is factual but is not intended to be all inclusive. The information relates only to the specific material designated and does not relate to its use in combination with other materials or its use as to any particular process. Because safety standards and regulations are subject to change and because S&C has no continuing control over the material, those handling, storing or using the material should satisfy themselves that they have current information regarding the particular way the material is handled, stored or used and that the same is done in accordance with federal, state and local law. S&C makes no warranty, expressed or implied, including (without limitation) warranties with respect to the completeness or continuing accuracy of the information contained herein or with respect to fitness for any particular use.*





Health	2
Fire	3
Reactivity	0
Personal Protection	H

## Material Safety Data Sheet

### Benzene MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Benzene

**Catalog Codes:** SLB1564, SLB3055, SLB2881

**CAS#:** 71-43-2

**RTECS:** CY1400000

**TSCA:** TSCA 8(b) inventory: Benzene

**CI#:** Not available.

**Synonym:** Benzol; Benzine

**Chemical Name:** Benzene

**Chemical Formula:** C<sub>6</sub>H<sub>6</sub>

#### Contact Information:

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

##### Composition:

Name	CAS #	% by Weight
Benzene	71-43-2	100

**Toxicological Data on Ingredients:** Benzene: ORAL (LD50): Acute: 930 mg/kg [Rat]. 4700 mg/kg [Mouse]. DERMAL (LD50): Acute: >9400 mg/kg [Rabbit]. VAPOR (LC50): Acute: 10000 ppm 7 hours [Rat].

#### Section 3: Hazards Identification

##### Potential Acute Health Effects:

Very hazardous in case of eye contact (irritant), of inhalation. Hazardous in case of skin contact (irritant, permeator), of ingestion. Inflammation of the eye is characterized by redness, watering, and itching.

##### Potential Chronic Health Effects:

**CARCINOGENIC EFFECTS:** Classified A1 (Confirmed for human.) by ACGIH, 1 (Proven for human.) by IARC. **MUTAGENIC EFFECTS:** Classified POSSIBLE for human. Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. **TERATOGENIC EFFECTS:** Not available. **DEVELOPMENTAL TOXICITY:** Classified Reproductive system/toxin/female [POSSIBLE]. The substance is toxic to blood, bone marrow, central nervous system (CNS). The substance may be toxic to liver, Urinary System. Repeated or prolonged exposure to the substance can produce target organs damage.

#### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Cold water may be used. WARM water MUST be used. Get medical attention immediately.

**Skin Contact:**

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if symptoms appear.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** 497.78°C (928°F)

**Flash Points:** CLOSED CUP: -11.1°C (12°F). (Setaflash)

**Flammable Limits:** LOWER: 1.2% UPPER: 7.8%

**Products of Combustion:** These products are carbon oxides (CO, CO<sub>2</sub>).

**Fire Hazards in Presence of Various Substances:**

Highly flammable in presence of open flames and sparks, of heat. Slightly flammable to flammable in presence of oxidizing materials. Non-flammable in presence of shocks.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available. Explosive in presence of oxidizing materials, of acids.

**Fire Fighting Media and Instructions:**

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog.

**Special Remarks on Fire Hazards:**

Extremely flammable liquid and vapor. Vapor may cause flash fire. Reacts on contact with iodine heptafluoride gas. Dioxygenyl tetrafluoroborate is as very powerful oxidant. The addition of a small particle to small samples of benzene, at ambient temperature, causes ignition. Contact with sodium peroxide with benzene causes ignition. Benzene ignites in contact with powdered chromic anhydride. Virgorous or incandescent reaction with hydrogen + Raney nickel (above 210 C) and bromine trifluoride.

**Special Remarks on Explosion Hazards:**

Benzene vapors + chlorine and light causes explosion. Reacts explosively with bromine pentafluoride, chlorine, chlorine trifluoride, diborane, nitric acid, nitryl perchlorate, liquid oxygen, ozone, silver perchlorate. Benzene + pentafluoride and methoxide (from arsenic pentafluoride and potassium methoxide) in trichlorotrifluoroethane causes explosion. Interaction

of nitryl perchlorate with benzene gave a slight explosion and flash. The solution of permanganic acid ( or its explosive anhydride, dimanganese heptoxide) produced by interaction of permanganates and sulfuric acid will explode on contact with benzene. Peroxodisulfuric acid is a very powerful oxidant. Uncontrolled contact with benzene may cause explosion. Mixtures of peroxomonsulfuric acid with benzene explodes.

## Section 6: Accidental Release Measures

**Small Spill:** Absorb with an inert material and put the spilled material in an appropriate waste disposal.

**Large Spill:**

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

**Precautions:**

Keep locked up.. Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapor/spray. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, acids.

**Storage:**

Store in a segregated and approved area. Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Avoid all possible sources of ignition (spark or flame).

## Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

**Personal Protection:**

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 0.5 STEL: 2.5 (ppm) from ACGIH (TLV) [United States] TWA: 1.6 STEL: 8 (mg/m3) from ACGIH (TLV) [United States] TWA: 0.1 STEL: 1 from NIOSH TWA: 1 STEL: 5 (ppm) from OSHA (PEL) [United States] TWA: 10 (ppm) from OSHA (PEL) [United States] TWA: 3 (ppm) [United Kingdom (UK)] TWA: 1.6 (mg/m3) [United Kingdom (UK)] TWA: 1 (ppm) [Canada] TWA: 3.2 (mg/m3) [Canada] TWA: 0.5 (ppm) [Canada] Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Liquid.

**Odor:**

Aromatic. Gasoline-like, rather pleasant. (Strong.)

**Taste:** Not available.

**Molecular Weight:** 78.11 g/mole

**Color:** Clear Colorless. Colorless to light yellow.

**pH (1% soln/water):** Not available.

**Boiling Point:** 80.1 (176.2°F)

**Melting Point:** 5.5°C (41.9°F)

**Critical Temperature:** 288.9°C (552°F)

**Specific Gravity:** 0.8787 @ 15 C (Water = 1)

**Vapor Pressure:** 10 kPa (@ 20°C)

**Vapor Density:** 2.8 (Air = 1)

**Volatility:** Not available.

**Odor Threshold:** 4.68 ppm

**Water/Oil Dist. Coeff.:** The product is more soluble in oil; log(oil/water) = 2.1

**Ionicity (in Water):** Not available.

**Dispersion Properties:** See solubility in water, diethyl ether, acetone.

**Solubility:**

Miscible in alcohol, chloroform, carbon disulfide oils, carbon tetrachloride, glacial acetic acid, diethyl ether, acetone. Very slightly soluble in cold water.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Heat, ignition sources, incompatibles.

**Incompatibility with various substances:** Highly reactive with oxidizing agents, acids.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:**

Benzene vapors + chlorine and light causes explosion. Reacts explosively with bromine pentafluoride, chlorine, chlorine trifluoride, diborane, nitric acid, nitryl perchlorate, liquid oxygen, ozone, silver perchlorate. Benzene + pentafluoride and methoxide (from arsenic pentafluoride and potassium methoxide) in trichlorotrifluoroethane causes explosion. Interaction of nitryl perchlorate with benzene gave a slight explosion and flash. The solution of permanganic acid ( or its explosive anhydride, dimanganese heptoxide) produced by interaction of permanganates and sulfuric acid will explode on contact with benzene. Peroxodisulfuric acid is a very powerful oxidant. Uncontrolled contact with benzene may cause explosion. Mixtures of peroxomonsulfuric acid with benzene explodes.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Absorbed through skin. Dermal contact. Eye contact. Inhalation.

**Toxicity to Animals:**

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 930 mg/kg [Rat]. Acute dermal toxicity (LD50): >9400 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 10000 7 hours [Rat].

**Chronic Effects on Humans:**

**CARCINOGENIC EFFECTS:** Classified A1 (Confirmed for human.) by ACGIH, 1 (Proven for human.) by IARC. **MUTAGENIC EFFECTS:** Classified POSSIBLE for human. Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. **DEVELOPMENTAL TOXICITY:** Classified Reproductive system/toxin/female [POSSIBLE]. Causes damage to the following organs: blood, bone marrow, central nervous system (CNS). May cause damage to the following organs: liver, Urinary System.

**Other Toxic Effects on Humans:**

Very hazardous in case of inhalation. Hazardous in case of skin contact (irritant, permeator), of ingestion.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:**

May cause adverse reproductive effects (female fertility, Embryotoxic and/or foetotoxic in animal) and birth defects. May affect genetic material (mutagenic). May cause cancer (tumorigenic, leukemia)) Human: passes the placental barrier, detected in maternal milk.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects: Skin: Causes skin irritation. It can be absorbed through intact skin and affect the liver, blood, metabolism, and urinary system. Eyes: Causes eye irritation. Inhalation: Causes respiratory tract and mucous membrane irritation. Can be absorbed through the lungs. May affect behavior/Central and Peripheral nervous systems (somnolence, muscle weakness, general anesthetic, and other symptoms similar to ingestion), gastrointestinal tract (nausea), blood metabolism, urinary system. Ingestion: May be harmful if swallowed. May cause gastrointestinal tract irritation including vomiting. May affect behavior/Central and Peripheral nervous systems (convulsions, seizures, tremor, irritability, initial CNS stimulation followed by depression, loss of coordination, dizziness, headache, weakness, pallor, flushing), respiration (breathlessness and chest constriction), cardiovascular system, (shallow/rapid pulse), and blood.

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are less toxic than the product itself.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

## Section 14: Transport Information

**DOT Classification:** CLASS 3: Flammable liquid.

**Identification:** : Benzene UNNA: 1114 PG: II

**Special Provisions for Transport:** Not available.

## Section 15: Other Regulatory Information

**Federal and State Regulations:**

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Benzene California prop. 65 (no significant risk level): Benzene: 0.007 mg/day (value) California prop. 65: This product contains the following ingredients

for which the State of California has found to cause cancer which would require a warning under the statute: Benzene Connecticut carcinogen reporting list.: Benzene Connecticut hazardous material survey.: Benzene Illinois toxic substances disclosure to employee act: Benzene Illinois chemical safety act: Benzene New York release reporting list: Benzene Rhode Island RTK hazardous substances: Benzene Pennsylvania RTK: Benzene Minnesota: Benzene Michigan critical material: Benzene Massachusetts RTK: Benzene Massachusetts spill list: Benzene New Jersey: Benzene New Jersey spill list: Benzene Louisiana spill reporting: Benzene California Director's list of Hazardous Substances: Benzene TSCA 8(b) inventory: Benzene SARA 313 toxic chemical notification and release reporting: Benzene CERCLA: Hazardous substances.: Benzene: 10 lbs. (4.536 kg)

**Other Regulations:**

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):**

CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F). CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

**DSCL (EEC):**

R11- Highly flammable. R22- Harmful if swallowed. R38- Irritating to skin. R41- Risk of serious damage to eyes. R45- May cause cancer. R62- Possible risk of impaired fertility. S2- Keep out of the reach of children. S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S39- Wear eye/face protection. S46- If swallowed, seek medical advice immediately and show this container or label. S53- Avoid exposure - obtain special instructions before use.

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 3

**Reactivity:** 0

**Personal Protection:** h

**National Fire Protection Association (U.S.A.):**

**Health:** 2

**Flammability:** 3

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

## Section 16: Other Information


**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:35 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	2
Fire	1
Reactivity	0
Personal Protection	E

## Material Safety Data Sheet

### Chromium MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Chromium

**Catalog Codes:** SLC4711, SLC3709

**CAS#:** 7440-47-3

**RTECS:** GB4200000

**TSCA:** TSCA 8(b) inventory: Chromium

**CI#:** Not applicable.

**Synonym:** Chromium metal; Chrome; Chromium Metal Chips 2" and finer

**Chemical Name:** Chromium

**Chemical Formula:** Cr

#### Contact Information:

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

##### Composition:

Name	CAS #	% by Weight
Chromium	7440-47-3	100

**Toxicological Data on Ingredients:** Chromium LD50: Not available. LC50: Not available.

#### Section 3: Hazards Identification

##### Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of eye contact (irritant), of inhalation. Slightly hazardous in case of ingestion.

##### Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH, 3 (Not classifiable for human.) by IARC.

MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to kidneys, lungs, liver, upper respiratory tract. Repeated or prolonged exposure to the substance can produce target organs damage.

#### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention.

**Skin Contact:**

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:** Not available.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** May be combustible at high temperature.

**Auto-Ignition Temperature:** 580°C (1076°F)

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Some metallic oxides.

**Fire Hazards in Presence of Various Substances:**

Slightly flammable to flammable in presence of open flames and sparks, of heat. Non-flammable in presence of shocks.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

**Special Remarks on Fire Hazards:**

Moderate fire hazard when it is in the form of a dust (powder) and burns rapidly when heated in flame. Chromium is attacked vigorously by fused potassium chlorate producing vivid incandescence. Pyrophoric chromium unites with nitric oxide with incandescence. Incandescent reaction with nitrogen oxide or sulfur dioxide.

**Special Remarks on Explosion Hazards:**

Powdered Chromium metal +fused ammonium nitrate may react violently or explosively. Powdered Chromium will explode spontaneously in air.

## Section 6: Accidental Release Measures

**Small Spill:**

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

**Large Spill:**

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.



## Section 7: Handling and Storage

### Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe dust. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, acids, alkalis.

**Storage:** Keep container tightly closed. Keep container in a cool, well-ventilated area.

## Section 8: Exposure Controls/Personal Protection

### Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

### Personal Protection:

Splash goggles. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

### Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

### Exposure Limits:

TWA: 0.5 (mg/m<sup>3</sup>) from ACGIH (TLV) [United States] TWA: 1 (mg/m<sup>3</sup>) from OSHA (PEL) [United States] TWA: 0.5 (mg/m<sup>3</sup>) from NIOSH [United States] TWA: 0.5 (mg/m<sup>3</sup>) [United Kingdom (UK)] TWA: 0.5 (mg/m<sup>3</sup>) [Canada] Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Metal solid.)

**Odor:** Odorless.

**Taste:** Not available.

**Molecular Weight:** 52 g/mole

**Color:** Silver-white to Grey.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 2642°C (4787.6°F)

**Melting Point:** 1900°C (3452°F) +/- 10 deg. C

**Critical Temperature:** Not available.

**Specific Gravity:** 7.14 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:**

Insoluble in cold water, hot water. Soluble in acids (except Nitric), and strong alkalies.

### Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Excess heat, incompatible materials

**Incompatibility with various substances:** Reactive with oxidizing agents, acids, alkalis.

**Corrosivity:** Not available.

**Special Remarks on Reactivity:**

Incompatible with molten Lithium at 180 deg. C, hydrogen peroxide, hydrochloric acid, sulfuric acid, most caustic alkalies and alkali carbonates, potassium chlorate, sulfur dioxide, nitrogen oxide, bromine pentafluoride. It may react violently or ignite with bromine pentafluoride. Chromium is rapidly attacked by fused sodium hydroxide + potassium nitrate. Potentially hazardous incompatibility with strong oxidizers.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

### Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available. LC50: Not available.

**Chronic Effects on Humans:**

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH, 3 (Not classifiable for human.) by IARC. May cause damage to the following organs: kidneys, lungs, liver, upper respiratory tract.

**Other Toxic Effects on Humans:**

Hazardous in case of skin contact (irritant), of inhalation. Slightly hazardous in case of ingestion.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:**

May cause cancer based on animal data. There is no evidence that exposure to trivalent chromium causes cancer in man.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects: May cause skin irritation. Eyes: May cause mechanical eye irritation. Inhalation: May cause irritation of the respiratory tract and mucous membranes of the respiratory tract. Ingestion: May cause gastrointestinal tract irritation with nausea, vomiting, diarrhea. Chronic Potential Health Effects: Inhalation: The effects of chronic exposure include irritation, sneezing, redness of the throat, bronchospasm, asthma, cough, polyps, chronic inflammation, emphysema, chronic bronchitis, pharyngitis, bronchopneumonia, pneumoconiosis. Effects on the nose from chronic chromium exposure include irritation, ulceration, and perforation of the nasal septum. Inflammation and ulceration of the larynx may also occur. Ingestion or Inhalation: Chronic exposure may cause liver and kidney damage.

### Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The product itself and its products of degradation are not toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

**Section 13: Disposal Considerations****Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

**Section 14: Transport Information**

**DOT Classification:** Not a DOT controlled material (United States).

**Identification:** Not applicable.

**Special Provisions for Transport:** Not applicable.

**Section 15: Other Regulatory Information****Federal and State Regulations:**

Connecticut hazardous material survey.: Chromium Illinois toxic substances disclosure to employee act: Chromium Illinois chemical safety act: Chromium New York release reporting list: Chromium Rhode Island RTK hazardous substances: Chromium Pennsylvania RTK: Chromium Minnesota: Chromium Michigan critical material: Chromium Massachusetts RTK: Chromium Massachusetts spill list: Chromium New Jersey: Chromium New Jersey spill list: Chromium Louisiana spill reporting: Chromium California Director's List of Hazardous Substances: Chromium TSCA 8(b) inventory: Chromium SARA 313 toxic chemical notification and release reporting: Chromium CERCLA: Hazardous substances.: Chromium: 5000 lbs. (2268 kg)

**Other Regulations:**

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):** Not controlled under WHMIS (Canada).

**DSCL (EEC):**

R40- Limited evidence of carcinogenic effect S36/37/39- Wear suitable protective clothing, gloves and eye/face protection. S45- In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 1

**Reactivity:** 0

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 2

**Flammability:** 1

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Splash goggles.

**Section 16: Other Information**

**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:16 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*

compressed air  
AIRGAS -- OXYGEN,COMPRESSED GAS (UN1072) -- 6830-00-286-8684

=====

MSDS Safety Information

=====

FSC: 6830  
NIIN: 00-286-8684  
MSDS Date: 11/29/1995  
MSDS Num: CHYYJ  
Tech Review: 11/09/1998  
Product ID: OXYGEN,COMPRESSED GAS (UN1072)  
Responsible Party  
Cage: AIRGA  
Name: AIRGAS  
Address: FIVE RADNOR CORP CNTR,STE 550,100 MATSOF  
City: RADNOR PA 19087-4579 US  
Info Phone Number: 610-687-5253  
Emergency Phone Number: 800-424-9300(CHEMTREC)

=====

Preparer Co. when other than Responsible Party Co.

=====

Cage: AIRGA  
Assigned Ind: N  
Name: AIRGAS  
Address: 100 MATSONFORD ROAD, 5 RADNOR CORP CNTR  
City: RADNOR PA 19087

=====

Contractor Summary

=====

Cage: AIRGA  
Name: AIRGAS  
Address: 100 MATSONFORD ROAD, 5 RADNOR CORP CNTR  
City: RADNOR PA 19087 US  
Phone: 215-687-5253  
Cage: OMN39  
Name: AIRGAS INC  
Address: 100 MATSONFORD RD SUITE 550  
City: WAYNE PA 19087 US  
Phone: 215-687-5253

=====

Item Description Information

=====

Item Name: OXYGEN,AVIATOR'S BREATHING  
Specification Number: MIL-O-27210  
Type/Grade/Class: NK  
Unit of Issue: CF  
UI Container Qty: 1  
Type of Container: CYLINDER

=====

Ingredients

=====

Cas: 7782-44-7  
RTECS #: RS2060000  
Name: OXYGEN  
% by wt: >99.0  
Other REC Limits: NONE RECOMMENDED  
OSHA PEL: NOT ESTABLISHED  
ACGIH TLV: NOT ESTABLISHED  
Ozone Depleting Chemical: N

-----  
Name: INERT MATERIALS  
% by wt: <1.0  
Other REC Limits: NONE RECOMMENDED  
OSHA PEL: NOT ESTABLISHED

compressed air

ACGIH TLV: NOT ESTABLISHED

=====

Health Hazards Data

=====

LD50 LC50 Mixture: NONE SPECIFIED BY MANUFACTURER.

Route Of Entry Inds - Inhalation: YES

Skin: YES

Ingestion: NO

Carcinogenicity Inds - NTP: NO

IARC: NO

OSHA: NO

Effects of Exposure: PURE OXY ESPECIALLY NOT PROPERLY HUMIDIFIED MAY CAUSE MUC MEMB IRRIT,PULM EDEMA AFT 24HR.AIR NORMALLY CONTAINS 20-21%OXY.AS EXPO TO HI CONC &/OR >ATM PRESS CONTD SYMPT OF TOXICITY MAY DEVL P,INCR VITAL CAPACITY,TIGHT CHEST,DISCOMFT,COUGH,CONGEST,TRACHBRONC,PNEU,EDEMA,ATELECTASIS,INCR RESP DEPTH,RAPID PANT/(SIGNS/SYM)

Explanation Of Carcinogenicity: PER MSDS:CARCINOGEN STATUS:NONE.

Signs And Symptoms Of Overexposure: HEALTH:ASTHMA-LIKE ATTACKS,APNEA IN INSPIRATORY POSITION,FIBROBLASTIC PROLIFERATION,HYPERPLASIA OF ALVEOLAR CELLS.CVS-BRADYCARDIA,HYPERTHERMIA,PERI VASOCONSTRICT.CNS-MOOD CHANGE,NAU,DIZZ,SLOW MENTAL P ROCE,MALAISE,APPREH,PARESTHESIAS,AUD HALLUC,CONSULV,UNCONSC.CHRONIC:OBSERVED INJURY TO MAN,DECR IN VITAL CAP,SEV IRREVS

Medical Cond Aggravated By Exposure: NONE SPECIFIED BY MANUFACTURER.

TARGET ORGANS:POISONING MAY AFFECT PULM,CARDIOVASCULAR & NERVOUS SYSTEMS & EYE.

First Aid: REMOVE TO FRESH AIR IMMED.BREATH STOP DO ART RESP.TREAT SYMPT/SUPP.GET MED ATTN IMMED.SKIN:GAS-NO ADVERSE EFFECTS

REPORTED).RAPID LIQ EVAP MAY CAUSE

FROSTBITE,RED,TINGL,PAIN,NUMB,HARD,WHITE,BLISTERS.A DVERSE EFFECTS OCCUR

GET MED ATTN.TREATFROSTBITE.WARM IN H2O @TEMP NOT >107F/WRAP IN

BLANKETS.EXERCISE AFFECT PART.GET MED ATTN IMMED.EYE:IMMED WASH

W/H2O,LIFT LIDS.FROSTBITE WARM H2O PREFER(OTH PRE)

=====

Handling and Disposal

=====

Spill Release Procedures: KEEP COMBUST AWAY FRM HAZ AREA.STOP LEAK W/O RISK.ISOLATE AREA TIL GAS DISPERS.KEEP UNNECESSARY PEOPLE AWAY;ISOLATE AREA,DENY ENTRY.VENTI CLSD SPACES BEF ENTERING.PROHIBIT SMOKING,SPARK PROD EPQMT,VEH ICLE OPERATION IN IMMED AREA/DISTANCE DOWNWIND.

Neutralizing Agent: NONE SPECIFIED BY MANUFACTURER.

Waste Disposal Methods: OBSERV ALL FED/STATE/LOC REGS.ASSIST CALL EPA/PROD SUPPLIER.GAS OXY SHOULD BE VENTED IN MANNER THAT DOESNT CREATE OXY RICH ATM IN CONF SPACE.LIQ OXY BE SURE LIQ/VAP DONT COME IN CONTACT W/COMBUST MATL ESPEC HYDROCARBON MATL,OIL,GREASE,ASPHALT.

Handling And Storage Precautions: OBSERVE ALL FED/STATE/LOC REGS WHEN STORING.ASSIST CALL EPA/PROD SUPPLIER.STORE IAW 29CFR1910.101,104.

Other Precautions: 1ST AID:GET MED ATTN IMMED.INGEST:SEEK MED ATTN.TREAT SYMPT/SUPPORT.GET MED ATTN.ANTIDOTE:NO SPECIFIC ANTIDOTE.TREAT SYMPTOM/SUPPORT.

=====

Fire and Explosion Hazard Information

=====

Flash Point Text: NP

Autoignition Temp Text: NP

Lower Limits: NP

Upper Limits: NP

Extinguishing Media: DRY CHEMICAL,CARBON DIOXIDE OR HALON.FOR LG FIRES USE WATER SPRAY,FOG,STANDARD FOAM.

Fire Fighting Procedures: MOVE CNTNR FRM FIRE AREA IF POSSIBLE.STAY AWAY FRM STORAGE TANK ENDS.COOL FIRE-EXPO CNTNR W/H2O FRM SIDE TIL WELL AFT FIRE OUT.W/D IMMED IF RISE SOUND FRM(SUPP)

compressed air  
Unusual Fire/Explosion Hazard: NEGLIG FIRE HAZ WHEN EXPO TO  
HEAT/FLAME.OXIDIZER-DECOMPO ESPECIALLY WHEN HEAT-YIELD OXY/OTHER GAS  
WHICH WILL INCR BURN RATE OF COMBUST MATTER.CONTACT W/(SUPPLE)

=====  
Control Measures  
=====

Respiratory Protection: NONE SPECIFIED BY MANUFACTURER.  
Ventilation: PROVIDE GENERAL DILUTION VENTILATION.  
Protective Gloves: FULL PROTECTIVE COLD INSULATING FOR LIQ  
Eye Protection: SPLASH PROOF SAF GOGG,FCSHIELD.  
Other Protective Equipment: LIQ-PROTECTIVE INSULATIVE CLOTH,EQPMT-PREVENT  
SKIN CONTACT,FREEZING.CONTACT LENSES SHOULDNT BE WORN.EYEWASH  
FOUNT,SHOWER  
Work Hygienic Practices: NONE SPECIFIED BY MANUFACTURER.  
Supplemental Safety and Health: FIRE/EXPLO:EASILY OXIDIZ,ORG,OTHER COMBUST  
MATL MAY RESULT IN IGN/VIOL COMBUST/EXPLO.CYL MAY EXPLO IN HEAT/FIRE.  
FIREFIGHT:VENT SAF DEVICE HEARD/DISCOLORATION OF STORAGE TANKS DUE TO  
FIRE.MASSIVE FIRE IN STORAGE AREA USE UNMAN HOSE HOLDER/MON NOZ/W/D FRM  
AREA,LET FIRE BURN.USE EXT SUITABLE FOR TYPE SURROUND FIRE.

=====  
Physical/Chemical Properties  
=====

HCC: G4  
B.P. Text: -297F,-183C  
M.P/F.P Text: -361F,-218C  
Decomp Text: NP  
Vapor Pres: 760 @-183C  
Vapor Density: 1.309G/L  
Spec Gravity: 1.105  
PH: NP  
Viscosity: NP  
Evaporation Rate & Reference: NP  
Solubility in Water: 0.0491 @0C  
Appearance and Odor: ODORLESS, COLORLESS,TASTELESS GAS  
Percent Volatiles by Volume: NP  
Corrosion Rate: NP

=====  
Reactivity Data  
=====

Stability Indicator: YES  
Stability Condition To Avoid: CONTACT W/COMBUST  
MATL(WOOD,PAPER,FUEL,OILS,ETC);DONT PERMIT DMG/OVERHEAT CNTNR.UNDER  
PRESSURE,MAY VIO RUP,TRAVEL DISTAN  
Materials To Avoid: ETHERS,ACETALDEHYDE,,SECAALCOHOL,ALKALI METALS,ALLYLIC  
CMPDS,AMMONIA,CARBON,COMBUST MATLS,CYANOGEN,ETHERS,FLAMM MATL  
Hazardous Decomposition Products: NONE  
Hazardous Polymerization Indicator: NO  
Conditions To Avoid Polymerization: NONE SPECIFIED BY MANUFACTURER.

=====  
Toxicological Information  
=====

=====  
Ecological Information  
=====

=====  
MSDS Transport Information  
=====

=====  
Regulatory Information  
=====

=====  
Other Information  
=====

compressed air

=====  
Transportation Information  
=====

Responsible Party Cage: AIRGA  
Trans ID NO: 67394  
Product ID: OXYGEN,COMPRESSED GAS (UN1072)  
MSDS Prepared Date: 11/29/1995  
Review Date: 11/09/1998  
Article w/O MSDS: N  
Net Unit Weight: 300 CUFT  
Multiple KIT Number: 0  
Unit Of Issue: CF  
Container QTY: 1  
Type Of Container: CYLINDER  
Additional Data: PER MSDS:NON-FLAMM GAS,OXIDIZER & NONFLAMMABLE GAS LABEL,  
LTD QUANT EXCEPTIONS:49CFR173.306.

=====  
Detail DOT Information  
=====

DOT PSN Code: LEH  
DOT Proper Shipping Name: OXYGEN, COMPRESSED  
Hazard Class: 2.2  
UN ID Num: UN1072  
Label: NONFLAMMABLE GAS, OXIDIZER  
Special Provision: A52  
Packaging Exception: 306  
Non Bulk Pack: 302  
Bulk Pack: 314,315  
Max Qty Pass: 75 KG  
Max Qty Cargo: 150 KG  
Vessel Stow Req: A

=====  
Detail IMO Information  
=====

IMO PSN Code: LBP  
IMO Proper Shipping Name: OXYGEN, COMPRESSED  
IMDG Page Number: 2169  
UN Number: 1072  
UN Hazard Class: 2(2.2)  
IMO Packaging Group: -  
Subsidiary Risk Label: OXIDIZING AGENT  
EMS Number: 2-04  
MED First Aid Guide NUM: NON

=====  
Detail IATA Information  
=====

IATA PSN Code: SWO  
IATA UN ID Num: 1072  
IATA Proper Shipping Name: OXYGEN, COMPRESSED  
IATA UN Class: 2.2  
Subsidiary Risk Class: 5.1  
IATA Label: NON-FLAMMABLE GAS & OXIDIZER  
Packing Note Passenger: 200  
Max Quant Pass: 75KG  
Max Quant Cargo: 150KG  
Packaging Note Cargo: 200

=====  
Detail AFI Information  
=====

AFI PSN Code: SWO  
AFI Proper Shipping Name: OXYGEN, COMPRESSED  
AFI Hazard Class: 2.2  
AFI UN ID NUM: UN1072



compressed air

AFI Label: 5.1  
Special Provisions: P5  
Back Pack Reference: A6.3, A6.6

=====


HAZCOM Label

=====

Product ID: OXYGEN,COMPRESSED GAS (UN1072)  
Cage: AIRGA  
Company Name: AIRGAS  
Street: 100 MATSONFORD ROAD, 5 RADNOR CORP CNTR  
City: RADNOR PA  
Zipcode: 19087 US  
Health Emergency Phone: 800-424-9300(CHEMTREC)  
Date Of Label Review: 11/09/1998  
Label Date: 11/09/1998  
Chronic Hazard IND: Y  
Eye Protection IND: YES  
Skin Protection IND: YES  
Signal Word: DANGER  
Health Hazard: Moderate  
Contact Hazard: None  
Fire Hazard: None  
Reactivity Hazard: Severe  
Hazard And Precautions: SKIN:MAY CAUSE FROSTBITE  
W/REDNESS,TINGLING,PAIN/NUMBNESS,HARD,WHITE,DVLP  
BLISTERS.EYE:FROSTBITE,REDNESS,PAIN,BLUR VISION.INGEST:FROSTBITE DMG OF  
LIPS/MOUTH/MUC MEMB.INHAL:MUC MEMB IRRIT,PULM EDEMA,CV S/CNS  
EFFECTS,UNCONSC,CONVULS.1ST AID:REMOVE TO FRESH AIR IMMED.BREATH STOP DO  
ART RESP.TREAT SYMPT/SUPP.SKIN:GAS-NO ADVERSE EFFECTS REPORTED.RAPID LIQ  
EVAP MAY CAUSE FROSTBITE,RED,TINGLE,PAIN,NUMB,HARD,WHITE,BLISTERS.TREAT  
FROSTBITE.WARM IN H2O @TEMP NOT >107F/WRAP IN BLANKETS.EXERCISE  
AFFECT PART.GET MED ATTN IMMED.EYE:IMMED WASH W/H2O,LIFT LIDS.FROSTBITE  
WARM H2O PREFER.INGEST:TREAT SYMPT/SUPP.I N ALL CASES GET MED ATTN.

=====

Disclaimer (provided with this information by the compiling agencies):  
This information is formulated for use by elements of the Department of  
Defense. The United States of America in no manner whatsoever expressly  
or implied warrants, states, or intends said information to have any  
application, use or viability by or to any person or persons outside the  
Department of Defense nor any person or persons contracting with any  
instrumentality of the United States of America and disclaims all  
liability for such use. Any person utilizing this instruction who is not  
a military or civilian employee of the United States of America should  
seek competent professional advice to verify and assume responsibility  
for the suitability of this information to their particular situation  
regardless of similarity to a corresponding Department of Defense or  
other government situation.



Health	2
Fire	1
Reactivity	0
Personal Protection	E

# Material Safety Data Sheet

## Copper MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Copper

**Catalog Codes:** SLC4939, SLC2152, SLC3943, SLC1150, SLC2941, SLC4729, SLC1936, SLC3727, SLC5515

**CAS#:** 7440-50-8

**RTECS:** GL5325000

**TSCA:** TSCA 8(b) inventory: Copper

**CI#:** Not available.

**Synonym:**

**Chemical Name:** Not available.

**Chemical Formula:** Cu

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**  
1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Copper	7440-50-8	100

**Toxicological Data on Ingredients:** Copper LD50: Not available. LC50: Not available.

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Very hazardous in case of ingestion. Hazardous in case of eye contact (irritant), of inhalation. Slightly hazardous in case of skin contact (irritant).

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance is toxic to lungs, mucous membranes. Repeated or prolonged exposure to the substance can produce target organs damage.

### Section 4: First Aid Measures

**Eye Contact:** Check for and remove any contact lenses. Do not use an eye ointment. Seek medical attention.

**Skin Contact:**

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

**Serious Skin Contact:** Not available.

**Inhalation:** Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

**Serious Inhalation:** Not available.

**Ingestion:**

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** May be combustible at high temperature.

**Auto-Ignition Temperature:** Not available.

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Some metallic oxides.

**Fire Hazards in Presence of Various Substances:** Not available.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

**Special Remarks on Fire Hazards:** Not available.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:**

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

**Large Spill:**

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

**Precautions:**

Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk, evaporate the residue under a fume hood. Ground all equipment containing material. Do not breathe dust. Avoid contact with eyes. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If you feel unwell, seek medical attention and show the label when possible.

**Storage:**

Keep container dry. Keep in a cool place. Ground all equipment containing material. Keep container tightly closed. Keep in a cool, well-ventilated place. Combustible materials should be stored away from extreme heat and away from strong oxidizing agents.

**Section 8: Exposure Controls/Personal Protection****Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:**

Splash goggles. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 1 (mg/m<sup>3</sup>) from ACGIH [1990] Consult local authorities for acceptable exposure limits.

**Section 9: Physical and Chemical Properties**

**Physical state and appearance:** Solid.

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 63.54 g/mole

**Color:** Not available.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 2595°C (4703°F)

**Melting Point:** 1083°C (1981.4°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 8.94 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Insoluble in cold water.

**Section 10: Stability and Reactivity Data**

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Not available.

**Incompatibility with various substances:** Not available.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:** Not available.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** No.

## Section 11: Toxicological Information

**Routes of Entry:** Absorbed through skin. Eye contact. Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available. LC50: Not available.

**Chronic Effects on Humans:** The substance is toxic to lungs, mucous membranes.

**Other Toxic Effects on Humans:**

Very hazardous in case of ingestion. Hazardous in case of inhalation. Slightly hazardous in case of skin contact (irritant).

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Human: passes through the placenta, excreted in maternal milk.

**Special Remarks on other Toxic Effects on Humans:** Not available.

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are as toxic as the original product.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

**Waste Disposal:**

## Section 14: Transport Information

**DOT Classification:** Not a DOT controlled material (United States).

**Identification:** Not applicable.

**Special Provisions for Transport:** Marine Pollutant

## Section 15: Other Regulatory Information

**Federal and State Regulations:**

Pennsylvania RTK: Copper Massachusetts RTK: Copper TSCA 8(b) inventory: Copper CERCLA: Hazardous substances.: Copper

**Other Regulations:** OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

**Other Classifications:**

**WHMIS (Canada):** CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

**DSCL (EEC):** R36- Irritating to eyes.

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 1

**Reactivity:** 0

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 2

**Flammability:** 1

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

**Section 16: Other Information**

**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/09/2005 04:58 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



## MATERIAL SAFETY DATA SHEET

**Diesel Fuel (All Types)**

**MSDS No. 9909**

### EMERGENCY OVERVIEW

#### CAUTION!

**OSHA/NFPA COMBUSTIBLE LIQUID - SLIGHT TO MODERATE IRRITANT  
EFFECTS CENTRAL NERVOUS SYSTEM  
HARMFUL OR FATAL IF SWALLOWED**

Moderate fire hazard. Avoid breathing vapors or mists. May cause dizziness and drowsiness. May cause moderate eye irritation and skin irritation (rash). Long-term, repeated exposure may cause skin cancer. If ingested, do NOT induce vomiting, as this may cause chemical pneumonia (fluid in the lungs).



NFPA 704 (Section 16)

### 1. CHEMICAL PRODUCT AND COMPANY INFORMATION

Hess Corporation  
1 Hess Plaza  
Woodbridge, NJ 07095-0961

EMERGENCY TELEPHONE NUMBER (24 hrs): **CHEMTREC (800) 424-9300**

COMPANY CONTACT (business hours): Corporate Safety (732) 750-6000

MSDS INTERNET WEBSITE: [www.hess.com](http://www.hess.com) (See Environment, Health, Safety & Social Responsibility)

**SYNONYMS:** Ultra Low Sulfur Diesel (ULSD); Low Sulfur Diesel; Motor Vehicle Diesel Fuel; Diesel Fuel #2; Dyed Diesel Fuel; Non-Road, Locomotive and Marine Diesel Fuel; Tax-exempt Diesel Fuel

See Section 16 for abbreviations and acronyms.

### 2. COMPOSITION and CHEMICAL INFORMATION ON INGREDIENTS

INGREDIENT NAME (CAS No.)	CONCENTRATION PERCENT BY WEIGHT
Diesel Fuel (68476-34-6)	100
Naphthalene (91-20-3)	Typically < 0.01

A complex mixture of hydrocarbons with carbon numbers in the range C9 and higher. Diesel fuel may be dyed (red) for tax purposes. May contain a multifunctional additive.

### 3. HAZARDS IDENTIFICATION

#### EYES

Contact with liquid or vapor may cause mild irritation.

#### SKIN

May cause skin irritation with prolonged or repeated contact. Practically non-toxic if absorbed following acute (single) exposure. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are repeatedly exposed.

#### INGESTION

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.



## MATERIAL SAFETY DATA SHEET

**Diesel Fuel (All Types)**

**MSDS No. 9909**

### **INHALATION**

Excessive exposure may cause irritations to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

**WARNING:** the burning of any hydrocarbon as a fuel in an area without adequate ventilation may result in hazardous levels of combustion products, including carbon monoxide, and inadequate oxygen levels, which may cause unconsciousness, suffocation, and death.

### **CHRONIC EFFECTS and CARCINOGENICITY**

Similar products produced skin cancer and systemic toxicity in laboratory animals following repeated applications. The significance of these results to human exposures has not been determined - see Section 11 Toxicological Information.

IARC classifies whole diesel fuel exhaust particulates as probably carcinogenic to humans (Group 2A). NIOSH regards whole diesel fuel exhaust particulates as a potential cause of occupational lung cancer based on animal studies and limited evidence in humans.

### **MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE**

Irritation from skin exposure may aggravate existing open wounds, skin disorders, and dermatitis (rash).

## **4. FIRST AID MEASURES**

### **EYES**

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

### **SKIN**

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or waterless hand cleanser. Obtain medical attention if irritation or redness develops.

### **INGESTION**

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Monitor for breathing difficulties. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

### **INHALATION**

Remove person to fresh air. If person is not breathing provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

## **5. FIRE FIGHTING MEASURES**

### **FLAMMABLE PROPERTIES:**

FLASH POINT:	> 125 °F (> 52 °C) minimum PMCC
AUTOIGNITION POINT:	494 °F (257 °C)
OSHA/NFPA FLAMMABILITY CLASS:	2 (COMBUSTIBLE)
LOWER EXPLOSIVE LIMIT (%):	0.6
UPPER EXPLOSIVE LIMIT (%):	7.5

### **FIRE AND EXPLOSION HAZARDS**

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

### **EXTINGUISHING MEDIA**

**SMALL FIRES:** Any extinguisher suitable for Class B fires, dry chemical, CO<sub>2</sub>, water spray, fire fighting foam, or Halon.





## MATERIAL SAFETY DATA SHEET

**Diesel Fuel (All Types)**

**MSDS No. 9909**

**LARGE FIRES:** Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

### **FIRE FIGHTING INSTRUCTIONS**

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment.

Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing.

Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

See Section 16 for the NFPA 704 Hazard Rating.

## **6. ACCIDENTAL RELEASE MEASURES**

ACTIVATE FACILITY'S SPILL CONTINGENCY OR EMERGENCY RESPONSE PLAN.

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact.

Carefully contain and stop the source of the spill, if safe to do so. Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection.

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal - caution, flammable vapors may accumulate in closed containers. Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

## **7. HANDLING and STORAGE**

### **HANDLING PRECAUTIONS**

Handle as a combustible liquid. Keep away from heat, sparks, and open flame! Electrical equipment should be approved for classified area. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Diesel fuel, and in particular low and ultra low sulfur diesel fuel, has the capability of accumulating a static electrical charge of sufficient energy to cause a fire/explosion in the presence of lower flashpoint products such as gasoline. The accumulation of such a static charge occurs as the diesel flows through pipelines, filters, nozzles and various work tasks such as tank/container filling, splash loading, tank cleaning; product sampling; tank gauging; cleaning, mixing, vacuum truck operations, switch loading, and product agitation. There is a greater potential for static charge accumulation in cold temperature, low humidity conditions.

Documents such as 29 CFR OSHA 1910.106 "Flammable and Combustible Liquids, NFPA 77 Recommended Practice on Static Electricity, API 2003 "Protection Against Ignitions Arising Out of Static, Lightning, and Stray Currents and ASTM D4865 "Standard Guide for Generation and Dissipation of Static



## MATERIAL SAFETY DATA SHEET

**Diesel Fuel (All Types)**

**MSDS No. 9909**

Electricity in Petroleum Fuel Systems" address special precautions and design requirements involving loading rates, grounding, bonding, filter installation, conductivity additives and especially the hazards associated with "switch loading." ["Switch Loading" is when a higher flash point product (such as diesel) is loaded into tanks previously containing a low flash point product (such as gasoline) and the electrical charge generated during loading of the diesel results in a static ignition of the vapor from the previous cargo (gasoline).]

Note: When conductivity additives are used or are necessary the product should achieve 25 picosiemens/meter or greater at the handling temperature.

### **STORAGE PRECAUTIONS**

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks".

### **WORK/HYGIENIC PRACTICES**

Emergency eye wash capability should be available in the near proximity to operations presenting a potential splash exposure. Use good personal hygiene practices. Avoid repeated and/or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Do not use as a cleaning solvent on the skin. Do not use solvents or harsh abrasive skin cleaners for washing this product from exposed skin areas. Waterless hand cleaners are effective. Promptly remove contaminated clothing and launder before reuse. Use care when laundering to prevent the formation of flammable vapors which could ignite via washer or dryer. Consider the need to discard contaminated leather shoes and gloves.

## **8. EXPOSURE CONTROLS and PERSONAL PROTECTION**

### **EXPOSURE LIMITS**

Components (CAS No.)	Source	<u>Exposure Limits</u>		Note
		TWA/STEL		
Diesel Fuel: (68476-34-6)	OSHA	5 mg/m, as mineral oil mist		
	ACGIH	100 mg/m <sup>3</sup> (as totally hydrocarbon vapor) TWA		A3, skin
Naphthalene (91-20-3)	OSHA	10 ppm TWA		
	ACGIH	10 ppm TWA / 15 ppm STEL		A4, Skin

### **ENGINEERING CONTROLS**

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

### **EYE/FACE PROTECTION**

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

### **SKIN PROTECTION**

Gloves constructed of nitrile, neoprene, or PVC are recommended. Chemical protective clothing such as of E.I. DuPont TyChem®, Saranex® or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.



## MATERIAL SAFETY DATA SHEET

**Diesel Fuel (All Types)**

**MSDS No. 9909**

### **RESPIRATORY PROTECTION**

A NIOSH/MSHA-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited. Refer to OSHA 29 CFR 1910.134, NIOSH Respirator Decision Logic, and the manufacturer for additional guidance on respiratory protection selection.

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

### **9. PHYSICAL and CHEMICAL PROPERTIES**

#### **APPEARANCE**

Clear, straw-yellow liquid. Dyed fuel oil will be red or reddish-colored.

#### **ODOR**

Mild, petroleum distillate odor

#### **BASIC PHYSICAL PROPERTIES**

BOILING RANGE: 320 to 690 oF (160 to 366 °C)  
VAPOR PRESSURE: 0.009 psia @ 70 °F (21 °C)  
VAPOR DENSITY (air = 1): > 1.0  
SPECIFIC GRAVITY (H<sub>2</sub>O = 1): 0.83 to 0.88 @ 60 °F (16 °C)  
PERCENT VOLATILES: 100 %  
EVAPORATION RATE: Slow; varies with conditions  
SOLUBILITY (H<sub>2</sub>O): Negligible

### **10. STABILITY and REACTIVITY**

**STABILITY:** Stable. Hazardous polymerization will not occur.

#### **CONDITIONS TO AVOID and INCOMPATIBLE MATERIALS**

Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources. Keep away from strong oxidizers; Viton ®; Fluorel ®

#### **HAZARDOUS DECOMPOSITION PRODUCTS**

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke).

### **11. TOXICOLOGICAL PROPERTIES**

#### **ACUTE TOXICITY**

Acute dermal LD50 (rabbits): > 5 ml/kg      Acute oral LD50 (rats): 9 ml/kg  
Primary dermal irritation: extremely irritating (rabbits)      Draize eye irritation: non-irritating (rabbits)  
Guinea pig sensitization: negative

#### **CHRONIC EFFECTS AND CARCINOGENICITY**

Carcinogenic: OSHA: NO      IARC: NO      NTP: NO      ACGIH: A3

Studies have shown that similar products produce skin tumors in laboratory animals following repeated applications without washing or removal. The significance of this finding to human exposure has not been determined. Other studies with active skin carcinogens have shown that washing the animal's skin with soap and water between applications reduced tumor formation.

#### **MUTAGENICITY (genetic effects)**

This material has been positive in a mutagenicity study.



## MATERIAL SAFETY DATA SHEET

**Diesel Fuel (All Types)**

**MSDS No. 9909**

### 12. ECOLOGICAL INFORMATION

Keep out of sewers, drainage areas, and waterways. Report spills and releases, as applicable, under Federal and State regulations.

### 13. DISPOSAL CONSIDERATIONS

Consult federal, state and local waste regulations to determine appropriate disposal options.

### 14. TRANSPORTATION INFORMATION

PROPER SHIPPING NAME:	Diesel Fuel	Placard (International Only):
HAZARD CLASS and PACKING GROUP:	3, PG III	
DOT IDENTIFICATION NUMBER:	NA 1993 (Domestic)	
	UN 1202 (International)	
DOT SHIPPING LABEL:	None	



Use Combustible Placard if shipping in bulk domestically

### 15. REGULATORY INFORMATION

#### U.S. FEDERAL, STATE, and LOCAL REGULATORY INFORMATION

This product and its constituents listed herein are on the EPA TSCA Inventory. Any spill or uncontrolled release of this product, including any substantial threat of release, may be subject to federal, state and/or local reporting requirements. This product and/or its constituents may also be subject to other regulations at the state and/or local level. Consult those regulations applicable to your facility/operation.

#### CLEAN WATER ACT (OIL SPILLS)

Any spill or release of this product to "navigable waters" (essentially any surface water, including certain wetlands) or adjoining shorelines sufficient to cause a visible sheen or deposit of a sludge or emulsion must be reported immediately to the National Response Center (1-800-424-8802) as required by U.S. Federal Law. Also contact appropriate state and local regulatory agencies as required.

#### CERCLA SECTION 103 and SARA SECTION 304 (RELEASE TO THE ENVIRONMENT)

The CERCLA definition of hazardous substances contains a "petroleum exclusion" clause which exempts crude oil, refined, and unrefined petroleum products and any indigenous components of such. However, other federal reporting requirements (e.g., SARA Section 304 as well as the Clean Water Act if the spill occurs on navigable waters) may still apply.

#### SARA SECTION 311/312 - HAZARD CLASSES

<u>ACUTE HEALTH</u>	<u>CHRONIC HEALTH</u>	<u>FIRE</u>	<u>SUDDEN RELEASE OF PRESSURE</u>	<u>REACTIVE</u>
X	X	X	--	--

#### SARA SECTION 313 - SUPPLIER NOTIFICATION

This product may contain listed chemicals below the *de minimis* levels which therefore are not subject to the supplier notification requirements of Section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372. If you may be required to report releases of chemicals listed in 40 CFR 372.28, you may contact Hess Corporate Safety if you require additional information regarding this product.

#### CALIFORNIA PROPOSITION 65 LIST OF CHEMICALS

This product contains the following chemicals that are included on the Proposition 65 "List of Chemicals" required by the California Safe Drinking Water and Toxic Enforcement Act of 1986:

<u>INGREDIENT NAME (CAS NUMBER)</u>	<u>Date Listed</u>
Diesel Engine Exhaust (no CAS Number listed)	10/01/1990

#### CANADIAN REGULATORY INFORMATION (WHMIS)

Class B, Division 3 (Combustible Liquid) and Class D, Division 2, Subdivision B (Toxic by other means)



## MATERIAL SAFETY DATA SHEET

**Diesel Fuel (All Types)**

**MSDS No. 9909**

### 16. OTHER INFORMATION

**NFPA® HAZARD RATING**

HEALTH:	0
FIRE:	2
REACTIVITY:	0

Refer to NFPA 704 "Identification of the Fire Hazards of Materials" for further information

**HMIS® HAZARD RATING**

HEALTH:	1 *	* Chronic
FIRE:	2	
PHYSICAL:	0	

**SUPERSEDES MSDS DATED:** 02/28/2001

#### **ABBREVIATIONS:**

AP = Approximately      < = Less than      > = Greater than  
N/A = Not Applicable      N/D = Not Determined      ppm = parts per million


#### **ACRONYMS:**

ACGIH	American Conference of Governmental Industrial Hygienists	NTP	National Toxicology Program
AIHA	American Industrial Hygiene Association	OPA	Oil Pollution Act of 1990
ANSI	American National Standards Institute (212) 642-4900	OSHA	U.S. Occupational Safety & Health Administration
API	American Petroleum Institute (202) 682-8000	PEL	Permissible Exposure Limit (OSHA)
CERCLA	Comprehensive Emergency Response, Compensation, and Liability Act	RCRA	Resource Conservation and Recovery Act
DOT	U.S. Department of Transportation [General info: (800) 467-4922]	REL	Recommended Exposure Limit (NIOSH)
EPA	U.S. Environmental Protection Agency	SARA	Superfund Amendments and Reauthorization Act of 1986 Title III
HMIS	Hazardous Materials Information System	SCBA	Self-Contained Breathing Apparatus
IARC	International Agency For Research On Cancer	SPCC	Spill Prevention, Control, and Countermeasures
MSHA	Mine Safety and Health Administration	STEL	Short-Term Exposure Limit (generally 15 minutes)
NFPA	National Fire Protection Association (617)770-3000	TLV	Threshold Limit Value (ACGIH)
NIOSH	National Institute of Occupational Safety and Health	TSCA	Toxic Substances Control Act
NOIC	Notice of Intended Change (proposed change to ACGIH TLV)	TWA	Time Weighted Average (8 hr.)
		WEEL	Workplace Environmental Exposure Level (AIHA)
		WHMIS	Canadian Workplace Hazardous Materials Information System

#### **DISCLAIMER OF EXPRESSED AND IMPLIED WARRANTIES**

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.



Health	1
Fire	2
Reactivity	1
Personal Protection	E

## Material Safety Data Sheet

### Iron Metal MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Iron Metal

**Catalog Codes:** SLI2047, SLI1996

**CAS#:** 7439-89-6

**RTECS:** NO4565500

**TSCA:** TSCA 8(b) inventory: Iron Metal

**CI#:** Not applicable.

**Synonym:**

**Chemical Name:** Iron

**Chemical Formula:** Fe

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Iron Metal, powder	7439-89-6	100

**Toxicological Data on Ingredients:** Not applicable.

#### Section 3: Hazards Identification

**Potential Acute Health Effects:** Slightly hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation.

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to liver, cardiovascular system, upper respiratory tract, pancreas. Repeated or prolonged exposure to the substance can produce target organs damage.

#### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

**Skin Contact:** Wash with soap and water. Get medical attention if irritation develops.

**Serious Skin Contact:** Not available.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:** Not available.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** Not available.

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Some metallic oxides.

**Fire Hazards in Presence of Various Substances:** Flammable in presence of heat.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Explosive in presence of open flames and sparks, of heat.

**Fire Fighting Media and Instructions:**

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

**Special Remarks on Fire Hazards:**

Chlorine Trifluoride reacts with iron with incandescence. Powdered iron reacts with fluorine below redness with incandescence. Reduced iron decomposes with nitrogen dioxide @ ordinary temperature with incandescence. Reacting mass formed by mixture of phosphorus and iron can become incandescent when heated. This material is flammable in powder form only.

**Special Remarks on Explosion Hazards:** Material in powdered form can explode when exposed to heat or flame

## Section 6: Accidental Release Measures

**Small Spill:**

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

**Large Spill:**

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system.

## Section 7: Handling and Storage

**Precautions:**

Do not ingest. Do not breathe dust. If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents, acids.

**Storage:** Keep container tightly closed. Keep container in a cool, well-ventilated area. Moisture sensitive.

## Section 8: Exposure Controls/Personal Protection

### Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

### Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:** Not available.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Solid metallic powder.)

**Odor:** Odorless.

**Taste:** Tasteless.

**Molecular Weight:** 55.85 g/mole

**Color:** Black to Grey.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 3000°C (5432°F)

**Melting Point:** 1535°C (2795°F)

**Critical Temperature:** Not available.

**Specific Gravity:** Density: 7.86 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Insoluble in cold water, hot water, diethyl ether.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Excess heat, ignition sources, incompatible materials, water/moisture, air, dust generation.



**Incompatibility with various substances:**

Reactive with oxidizing agents, acids. Slightly reactive to reactive with moisture.

**Corrosivity:** Not considered to be corrosive for metals and glass.

**Special Remarks on Reactivity:**

Hot iron(wire) burns in Chlorine gas. Violent decomposition of hydrogen peroxide (53% by weight or greater) may be caused by contact with iron. Readily oxidizes in moist air forming rust. Reactive with halogens. Incompatible with acetaldehyde, ammonium peroxodisulfate, chloroformamidine, chloric acid, ammonium nitrate, dinitrogen tetroxide, nitryl fluoride, polystyrene, sodium acetylide, potassium dichromate, peroxyformic acid, sulfuric acid, sodium carbide. Readily attacked by dilute mineral acids and/or attacked or dissolved by organic acids. Not appreciably attacked by cold sulfuric acid, or nitric acid, but is attacked by hot acids.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:** Acute oral toxicity (LD50): 30000 mg/kg [Rat].

**Chronic Effects on Humans:** May cause damage to the following organs: liver, cardiovascular system, upper respiratory tract, pancreas.

**Other Toxic Effects on Humans:** Slightly hazardous in case of skin contact (irritant), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Not available.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects: Skin: Iron metal filings or dust: May cause skin irritation by mechanical action. Iron metal wire: Not likely to cause skin irritation. Eyes: Iron metal filings or dust: Can irritate eyes by mechanical action. Iron metal wire: No hazard. Will not cause eye irritation. Inhalation: Iron dust: Can irritate the respiratory tract by mechanical action. Iron metal wire or filings: Not an inhalation hazard unless metal is heated. If metal is heated, fumes will be released. Inhalation of these fumes may cause "fume metal fever", which is characterized by flu-like symptoms. Symptoms may include metallic taste, fever, nausea, vomiting, chills, cough, weakness, chest pain, generalized muscle pain/aches, and increased white blood cell count. Ingestion: Iron metal wire: Not an ingestion hazard. Iron metal filings or dust: The amount of ingested iron which constitutes a toxic dose is not well defined. Proposed toxic doses of elemental iron are 20 mg/kg for gastrointestinal irritation to greater than 60 mg/kg for systemic toxicity. Gastrointestinal effects are the first signs to appear, with hemorrhagic vomiting and diarrhea, hematochezia, abdominal pain, lethargy, metabolic acidosis, coagulopathy, shock, coma and convulsions developing from 0 to 6 hours after ingestion. Leukocytosis may also occur. An asymptomatic phase may ensue at 6 to 12 hours post-ingestion, followed by hypoglycemia or hyperglycemia, hepatic and renal failure, severe acidosis, cyanosis, fever, CNS depression (lethargy, restlessness and/or confusion seizures), hypotension, and cardiovascular collapse/cardiac failure in 12 to 48 hours. Hepatic cirrhosis, gastrointestinal scarring and/or strictures may arise in 2 to 6 weeks. It may also cause an anaphylactoid reaction. Non-cardiogenic pulmonary edema also develop in severe cases of iron intoxication. Chronic Potential Health Effects: Inhalation: Chronic inhalation of iron dust can lead to accumulation in the lungs and a characteristic stippled appearance on X-rays. This condition, called SIDEROSIS, is considered benign in that it does not interfere with lung function and does not predispose to other disease. Chronic inhalation of iron dust may also cause fibrosis in the lungs. Ingestion: Clinical signs of iron overload appear when the total body iron is 5 to 10 times higher than normal. Neurobehavioral defects including depression, decreased activity, habituation, reflex startle, and conditioned avoidance response performance may occur. However, similar effects were also seen in iron deficiency. It is therefore likely that these behavioral effects are secondary to general toxicity. High serum iron levels may be associated with an increased risk of fatal acute myocardial infarction (MI). Skin: Prolonged or repeated contact may cause hypersensitivity.

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The product itself and its products of degradation are not toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

### Section 13: Disposal Considerations

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

### Section 14: Transport Information

**DOT Classification:** CLASS 4.1: Flammable solid.

**Identification:** : Metal powder, flammable, n.o.s. (Iron metal powder) UNNA: 3089 PG: III

**Special Provisions for Transport:** Not available.

### Section 15: Other Regulatory Information

**Federal and State Regulations:**

California Director's List of Hazardous Substances: Iron Metal TSCA 8(b) inventory: Iron Metal

**Other Regulations:** EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):** CLASS B-4: Flammable solid.

**DSCL (EEC):**

R11- Highly flammable. S16- Keep away from sources of ignition - No smoking. S22- Do not breathe dust.

**HMIS (U.S.A.):**

**Health Hazard:** 1

**Fire Hazard:** 2

**Reactivity:** 1

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 1

**Flammability:** 2

**Reactivity:** 1

**Specific hazard:**

**Protective Equipment:**

Gloves Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

### Section 16: Other Information

**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/09/2005 05:52 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*

**MATERIAL SAFETY DATA SHEET****PRODUCT NAME: ISOBUTYLENE****1. Chemical Product and Company Identification**

BOC Gases,  
Division of  
The BOC Group, Inc.  
575 Mountain Avenue  
Murray Hill, NJ 07974

BOC Gases  
Division of  
BOC Canada Limited  
5975 Falbourne Street, Unit 2  
Mississauga, Ontario L5R 3W6

**TELEPHONE NUMBER:** (908) 464-8100**24-HOUR EMERGENCY TELEPHONE NUMBER:**  
CHEMTREC (800) 424-9300**TELEPHONE NUMBER:** (905) 501-1700**24-HOUR EMERGENCY TELEPHONE NUMBER:**  
(905) 501-0802**EMERGENCY RESPONSE PLAN NO:** 20101**PRODUCT NAME:** ISOBUTYLENE**CHEMICAL NAME:** Isobutylene**COMMON NAMES/SYNONYMS:** 2-Methylpropene, Isobutene**TDG (Canada) CLASSIFICATION:** 2.1**WHMIS CLASSIFICATION:** A, B1, D2B**PREPARED BY:** Loss Control (908)464-8100/(905)501-1700**PREPARATION DATE:** 6/1/95**REVIEW DATES:** 6/7/96**2. Composition, Information on Ingredients**

INGREDIENT	% VOLUME	PEL-OSHA <sup>1</sup>	TLV-ACGIH <sup>2</sup>	LD <sub>50</sub> or LC <sub>50</sub> Route/Species
Isobutylene FORMULA: C <sub>4</sub> H <sub>8</sub> CAS: 115-11-7 RTECS #: UD0890000	99.0 to 99.8	Simple Asphyxiant	Simple Asphyxiant	LC <sub>50</sub> 620 mg/m <sup>3</sup> /3H (rat)

<sup>1</sup> As stated in 29 CFR 1910, Subpart Z (revised July 1, 1993)<sup>2</sup> As stated in the ACGIH 1994-95 Threshold Limit Values for Chemical Substances and Physical Agents**3. Hazards Identification****EMERGENCY OVERVIEW**

This product does not contain oxygen and may cause asphyxia if released in a confined area. Simple hydrocarbons can cause irritation and central nervous system depression at high concentrations. flammable.

**ROUTE OF ENTRY:**

Skin Contact Yes	Skin Absorption No	Eye Contact Yes	Inhalation Yes	Ingestion No
---------------------	-----------------------	--------------------	-------------------	-----------------

**MSDS:** G-53**Revised:** 6/7/96

Page 1 of 7

PRODUCT NAME: ISOBUTYLENE
---------------------------

**HEALTH EFFECTS:**

Exposure Limits No	Irritant Yes	Sensitization No
Teratogen No	Reproductive Hazard No	Mutagen No
Synergistic Effects None Reported		

Carcinogenicity: -- NTP: No IARC: No OSHA: No

**EYE EFFECTS:**

Irritation may occur.

**SKIN EFFECTS:**

None anticipated as product is a gas at room temperature.

**INGESTION EFFECTS:**

Ingestion is unlikely.

**INHALATION EFFECTS:**

Product is relatively nontoxic. Simple hydrocarbons can irritate the eyes, mucous membranes and respiratory system at high concentrations.

Inhalation of high concentrations may cause dizziness, disorientation, incoordination, narcosis, nausea or narcotic effects.

This product may displace oxygen if released in a confined space. Maintain oxygen levels above 19.5% at sea level to prevent asphyxiation.

Effects of oxygen deficiency resulting from simple asphyxiants may include: rapid breathing, diminished mental alertness, impaired muscular coordination, faulty judgement, depression of all sensations, emotional instability, and fatigue. As asphyxiation progresses, nausea, vomiting, prostration, and loss of consciousness may result, eventually leading to convulsions, coma, and death.

Oxygen deficiency during pregnancy has produced developmental abnormalities in humans and experimental animals.

**NFPA HAZARD CODES**

Health: 1  
Flammability: 4  
Reactivity: 0

**HMIS HAZARD CODES**

Health: 1  
Flammability: 4  
Reactivity: 0

**RATINGS SYSTEM**

0 = No Hazard  
1 = Slight Hazard  
2 = Moderate Hazard  
3 = Serious Hazard  
4 = Severe Hazard

**4. First Aid Measures****EYES:**

Never introduce oil or ointment into the eyes without medical advice! If pain is present, refer the victim to an ophthalmologist for further treatment and follow up.

**SKIN:**

**MSDS:** G-53

**Revised:** 6/7/96

<b>PRODUCT NAME: ISOBUTYLENE</b>
----------------------------------

Remove contaminated clothing and wash affected area with soap and water. If irritation persists, seek medical attention.

**INGESTION:**

Not normally required. Seek immediate medical attention.

**INHALATION:**

PROMPT MEDICAL ATTENTION IS MANDATORY IN ALL CASES OF OVEREXPOSURE TO PRODUCT. RESCUE PERSONNEL SHOULD BE EQUIPPED WITH SELF-CONTAINED BREATHING APPARATUS. Conscious persons should be assisted to an uncontaminated area and inhale fresh air. Quick removal from the contaminated area is most important. Unconscious persons should be moved to an uncontaminated area, given assisted (artificial) respiration and supplemental oxygen. Further treatment should be symptomatic and supportive.

## 5. Fire Fighting Measures

Conditions of Flammability: Flammable liquid and vapor		
Flash point: -105 °F (-76 °C)	Method: Closed Cup	Autoignition Temperature: 869 °F (465 °C)
LEL(%): 1.8	UEL(%): 9.6	
Hazardous combustion products: Carbon monoxide, Carbon dioxide		
Sensitivity to mechanical shock: None		
Sensitivity to static discharge: Not Available		

**FIRE AND EXPLOSION HAZARDS:**

Isobutylene is heavier than air and may travel a considerable distance to an ignition source. Isobutylene is a flammable gas! Keep away from open flame and other sources of ignition. Do not allow smoking in storage areas or when handling.

**EXTINGUISHING MEDIA:**

Water, carbon dioxide, dry chemical.

**FIRE FIGHTING INSTRUCTIONS:**

If possible, stop the flow of gas with a remote valve. Use water spray to cool fire exposed containers. If fire is extinguished and flow of gas is continued, increase ventilation to prevent a build up of a flammable/ explosive atmosphere. Extinguish sources of ignition.

Be cautious of a Boiling Liquid Evaporating Vapor Explosion, BLEVE, if flame is impinging on surrounding containers. Direct 500 GPM water stream onto containers above the liquid level with remote monitors. Limit the number of personnel in proximity to the fire. Evacuate surrounding areas to at least 3000 feet in all directions.

## 6. Accidental Release Measures

Evacuate all personnel from affected area. Use appropriate protective equipment. Increase ventilation to prevent build up of a flammable/explosive atmosphere. Extinguish all sources of ignition! If leak is in user's equipment, be certain to purge piping with inert gas prior to attempting repairs. If leak is in container or container valve, contact the appropriate emergency telephone number listed in Section 1 or call your closest BOC location

PRODUCT NAME: ISOBUTYLENE
---------------------------

## 7. Handling and Storage

Earth bond and ground all lines and equipment associated with the product system. Electrical equipment should be non-sparking and explosion proof.

Use only in well-ventilated areas. Valve protection caps must remain in place unless container is secured with valve outlet piped to use point. Do not drag, slide or roll cylinders. Use a suitable hand truck for cylinder movement. Use a pressure regulator when connecting cylinder to lower pressure (<250 psig) piping or systems. Do not heat cylinder by any means to increase the discharge rate of product from the cylinder. Use a check valve or trap in the discharge line to prevent hazardous back flow into the cylinder.

Protect cylinders from physical damage. Store in cool, dry, well-ventilated area away from heavily trafficked areas and emergency exits. Do not allow the temperature where cylinders are stored to exceed 130°F (54°C). Cylinders should be stored upright and firmly secured to prevent falling or being knocked over. Full and empty cylinders should be segregated. Use a "first in-first out" inventory system to prevent full cylinders from being stored for excessive periods of time.

Post "No Smoking" signs in storage or use areas.

For additional recommendations consult Compressed Gas Association Pamphlet P-1.

Never carry a compressed gas cylinder or a container of a gas in cryogenic liquid form in an enclosed space such as a car trunk, van or station wagon. A leak can result in a fire, explosion, asphyxiation or a toxic exposure.

## 8. Exposure Controls, Personal Protection

### EXPOSURE LIMITS<sup>1</sup>:

INGREDIENT	% VOLUME	PEL-OSHA <sup>2</sup>	TLV-ACGIH <sup>3</sup>	LD <sub>50</sub> or LC <sub>50</sub> Route/Species
Isobutylene FORMULA: C <sub>4</sub> H <sub>8</sub> CAS: 115-11-7 RTECS #: UD0890000	99.0 to 99.8	Simple Asphyxiant	Simple Asphyxiant	LC <sub>50</sub> 620 mg/m <sup>3</sup> /3H (rat)

<sup>1</sup> Refer to individual state or provincial regulations, as applicable, for limits which may be more stringent than those listed here.

<sup>2</sup> As stated in 29 CFR 1910, Subpart Z (revised July 1, 1993)

<sup>3</sup> As stated in the ACGIH 1994-1995 Threshold Limit Values for Chemical Substances and Physical Agents.

### ENGINEERING CONTROLS:

Use local exhaust to prevent accumulation. Use general ventilation to prevent build up of flammable concentrations. May use hood with forced ventilation when handling small quantities. If product is handled routinely where the potential for leaks exists, all electrical equipment must be rated for use in potentially flammable atmospheres. Consult the National Electrical Code for details.

### EYE/FACE PROTECTION:

Safety goggles or glasses.

### SKIN PROTECTION:

Protective gloves made of plastic or rubber.

PRODUCT NAME: ISOBUTYLENE
---------------------------

**RESPIRATORY PROTECTION:**

Positive pressure air line with full-face mask and escape bottle or self-contained breathing apparatus should be available for emergency use.

**OTHER/GENERAL PROTECTION:**

Safety shoes, safety shower, eyewash.

**9. Physical and Chemical Properties**

PARAMETER	VALUE	UNITS
Physical state (gas, liquid, solid)	: Gas	
Vapor pressure at 70°F	: 39	psia
Vapor density at STP (Air = 1)	: 1.98	
Evaporation point	: Not Available	
Boiling point	: 19.5	°F
	: -6.9	°C
Freezing point	: -220.6	°F
	: -140.3	°C
pH	: Not Available	
Specific gravity	: Not Available	
Oil/water partition coefficient	: Not Available	
Solubility (H2O)	: Insoluble	
Odor threshold	: Not Available	
Odor and appearance	: A colorless gas with an unpleasant odor similar to that of burning coal.	

**10. Stability and Reactivity****STABILITY:**

Stable

**CONDITIONS TO AVOID (STABILITY):**

None

**INCOMPATIBLE MATERIALS:**

Oxidizers



PRODUCT NAME: ISOBUTYLENE
---------------------------

**HAZARDOUS DECOMPOSITION PRODUCTS:**

Carbon monoxide

**11. Toxicological Information**

Oxygen deficiency during pregnancy has produced developmental abnormalities in humans and experimental animals.

No chronic effects data given in the Registry of Toxic Effects of Chemical Substances (RTECS) or Sax, Dangerous Properties of Industrial Materials, 7th ed.

**12. Ecological Information**

No data given.

**13. Disposal Considerations**

Do not attempt to dispose of residual waste or unused quantities. Return in the shipping container PROPERLY LABELED, WITH ANY VALVE OUTLET PLUGS OR CAPS SECURED AND VALVE PROTECTION CAP IN PLACE to BOC Gases or authorized distributor for proper disposal.

**14. Transport Information**

PARAMETER	United States DOT	Canada TDG
PROPER SHIPPING NAME:	Isobutylene	Isobutylene
HAZARD CLASS:	2.1	2.1
IDENTIFICATION NUMBER:	UN 1055	UN 1055
SHIPPING LABEL:	FLAMMABLE GAS	FLAMMABLE GAS

**15. Regulatory Information**

Isobutylene is listed under the accident prevention provisions of section 112(r) of the Clean Air Act (CAA) with a threshold quantity (TQ) of 10,000 pounds.

**SARA TITLE III NOTIFICATIONS AND INFORMATION****SARA TITLE III - HAZARD CLASSES:**

Acute Health Hazard

Fire Hazard

Sudden Release of Pressure Hazard

**16. Other Information**


Compressed gas cylinders shall not be refilled without the express written permission of the owner. Shipment of a compressed gas cylinder which has not been filled by the owner or with his/her (written) consent is a violation of transportation regulations.

**MSDS:** G-53**Revised:** 6/7/96

PRODUCT NAME: ISOBUTYLENE
---------------------------

**DISCLAIMER OF EXPRESSED AND IMPLIED WARRANTIES:**

Although reasonable care has been taken in the preparation of this document, we extend no warranties and make no representations as to the accuracy or completeness of the information contained herein, and assume no responsibility regarding the suitability of this information for the user's intended purposes or for the consequences of its use. Each individual should make a determination as to the suitability of the information for their particular purpose(s).



Health	1
Fire	3
Reactivity	2
Personal Protection	E

## Material Safety Data Sheet Magnesium MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Magnesium

**Catalog Codes:** SLM4408, SLM2263, SLM3637

**CAS#:** 7439-95-4

**RTECS:** OM2100000

**TSCA:** TSCA 8(b) inventory: Magnesium

**CI#:** Not applicable.

**Synonym:** Magnesium ribbons, turnings or sticks

**Chemical Name:** Magnesium

**Chemical Formula:** Mg

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Magnesium	7439-95-4	100

**Toxicological Data on Ingredients:** Magnesium LD50: Not available. LC50: Not available.

### Section 3: Hazards Identification

**Potential Acute Health Effects:** Slightly hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation.

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. Repeated or prolonged exposure is not known to aggravate medical condition.

### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

**Skin Contact:** Wash with soap and water. Cover the irritated skin with an emollient. Get medical attention if irritation develops.

**Serious Skin Contact:** Not available.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** Not available.

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Some metallic oxides.

**Fire Hazards in Presence of Various Substances:**

Highly flammable in presence of open flames and sparks, of heat. Flammable in presence of acids, of moisture. Non-flammable in presence of shocks.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available. Explosive in presence of acids, of moisture.

**Fire Fighting Media and Instructions:**

Flammable solid. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:**

Magnesium turnings, chips or granules, ribbons, are flammable. They can be easily ignited. They may reignite after fire is extinguished. Produces flammable gases on contact with water and acid. May ignite on contact with water or moist air. Magnesium fires do not flare up violently unless moisture is present.

**Special Remarks on Explosion Hazards:** Reacts with acids and water to form hydrogen gas which is highly flammable and explosive

## Section 6: Accidental Release Measures

**Small Spill:** Use appropriate tools to put the spilled solid in a convenient waste disposal container.

**Large Spill:**

Flammable solid. Stop leak if without risk. Do not touch spilled material. Use water spray curtain to divert vapor drift. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal.

## Section 7: Handling and Storage

**Precautions:**

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not breathe dust. Keep away from incompatibles such as oxidizing agents, acids, moisture.

**Storage:**

Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Avoid all possible sources of ignition (spark or flame). Moisture sensitive. Dangerous when wet.

## Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:** Not available.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Metal solid)

**Odor:** Odorless.

**Taste:** Not available.

**Molecular Weight:** 24.31 g/mole

**Color:** Silver-white

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 1100°C (2012°F)

**Melting Point:** 651°C (1203.8°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 1.74 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:**

Very slightly soluble in hot water. Insoluble in cold water. Insoluble in chromium trioxides, and mineral acids, alkalies. Slightly soluble with decomposition in hot water. Soluble in concentrated hydrogen fluoride, and ammonium salts.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Heat, incompatible materials, water or moisture, moist air.

**Incompatibility with various substances:** Reactive with oxidizing agents, acids, moisture.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:**

Violent chemical reaction with oxidizing agents. Reacts with water to create hydrogen gas and heat. Must be kept dry. Reacts with acids to form hydrogen gas which is highly flammable and explosive. Magnesium forms hazardous or explosive mixtures with aluminum and potassium perchlorate; ammonium nitrate; barium nitrate, barium dioxide and zinc; beryllium oxide; boron phosphodiiodide; bromobenzyl trifluoride; cadmium cyanide; cadmium oxide; calcium carbide; carbonates; carbon tetrachloride; chlorine; chlorine trifluoride; chloroform; cobalt cyanide; copper cyanide; copper sulfate(anhydrous), ammonium nitrate, potassium chlorate and water; cupric oxide; cupric sulfate; fluorine; gold cyanide; hydrogen and calcium carbonate; hydrogen iodide; hydrogen peroxide; iodine; lead cyanide; mercuric oxide; mercury cyanide; methyl chloride; molybdenum trioxide; nickel cyanide; nitric acid; nitrogen dioxide; oxygen (liquid); performic acid; phosphates; potassium chlorate; potassium perchlorate; silver nitrate; silver oxide; sodium perchlorate; sodium peroxide; sodium peroxide and carbon dioxide; stannic oxide; sulfates; trichloroethylene; zinc cyanide; zinc oxide.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available. LC50: Not available.

**Chronic Effects on Humans:** Not available.

**Other Toxic Effects on Humans:** Slightly hazardous in case of skin contact (irritant), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Not available.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects: Skin: May cause skin irritation by mechanical action. May get mechanical injury or embedding of chips/particles in skin. The particles that are embedded in the wounds may retard healing. Eyes: May cause eye irritation by mechanical action. Mechanical injury may occur. Particles or chips may embed in eye and retard healing. Inhalation: Low hazard for usual industrial handling. It may cause respiratory tract irritation. However, it is unlikely due to physical form. When Magnesium metal is heated during welding or smelting process, Metal Fume Fever may result from inhalation of magnesium fumes. Metal Fume Fever is a flu-like condition consisting of fever, chills, sweating, aches, pains, cough, weakness, headache, nausea, vomiting, and breathing difficulty. Other symptoms may include metallic taste, increased white blood cell count. There is no permanent ill-effect. Ingestion: Low hazard for usual industrial handling. There are no known reports of serious industrial poisonings with Magnesium. Ingestion of large amounts of chips, turnings or ribbons may cause gastrointestinal tract irritation with nausea, vomiting, and diarrhea. Acute ingestion may also result in Hypermagnesia. Hypermagnesia may cause hypotension, bradycardia, CNS depression, respiratory depression, and impairment of neuromuscular transmission (hyporeflexia, paralysis).

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The product itself and its products of degradation are not toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

### Section 13: Disposal Considerations

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

### Section 14: Transport Information

**DOT Classification:** CLASS 4.1: Flammable solid.

**Identification:** : Magnesium UNNA: 1869 PG: III

**Special Provisions for Transport:** Not available.

### Section 15: Other Regulatory Information

**Federal and State Regulations:**

Connecticut hazardous material survey.: Magnesium Rhode Island RTK hazardous substances: Magnesium Pennsylvania RTK: Magnesium Massachusetts RTK: Magnesium Massachusetts spill list: Magnesium New Jersey: Magnesium TSCA 8(b) inventory: Magnesium

**Other Regulations:**

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):**

CLASS B-4: Flammable solid. CLASS B-6: Reactive and very flammable material.

**DSCL (EEC):**

R11- Highly flammable. R15- Contact with water liberates extremely flammable gases. S7/8- Keep container tightly closed and dry. S43- In case of fire, use dry chemical. Never use water.

**HMIS (U.S.A.):**

**Health Hazard:** 1

**Fire Hazard:** 3

**Reactivity:** 2

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 0

**Flammability:** 1

**Reactivity:** 1

**Specific hazard:**

**Protective Equipment:**

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

## Section 16: Other Information

**References:** Not available.


**Other Special Considerations:** Not available.

**Created:** 10/09/2005 06:00 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*





Health	1
Fire	0
Reactivity	0
Personal Protection	E

## Material Safety Data Sheet

### Manganese Metal Powder MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Manganese Metal Powder

**Catalog Codes:** SLM4390

**CAS#:** 7439-96-5

**RTECS:** OO9275000

**TSCA:** TSCA 8(b) inventory: Manganese

**CI#:** Not available.

**Synonym:**

**Chemical Name:** Manganese

**Chemical Formula:** Mn

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Manganese	7439-96-5	100

**Toxicological Data on Ingredients:** Manganese: ORAL (LD50): Acute: 9000 mg/kg [Rat].

#### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Hazardous in case of inhalation. Slightly hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion.

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to blood, lungs, brain, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage.

#### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

**Skin Contact:** Wash with soap and water. Cover the irritated skin with an emollient. Get medical attention if irritation develops.

**Serious Skin Contact:** Not available.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:** Not available.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** Not applicable.

**Flash Points:** Not applicable.

**Flammable Limits:** Not applicable.

**Products of Combustion:** Not available.

**Fire Hazards in Presence of Various Substances:** Not applicable.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Explosive in presence of open flames and sparks.

**Fire Fighting Media and Instructions:** Not applicable.

**Special Remarks on Fire Hazards:**

Moderate fire potential, in the form of dust or powder, when exposed to flame. When manganese is heated in the vapor of phosphorus at a very dull red heat, union occurs with incandescence. Concentrated nitric acid reacts with powdered manganese with incandescence and explosion. Powdered manganese ignites in chlorine.

**Special Remarks on Explosion Hazards:** Moderate explosion potential, in the form of dust or powder, when exposed to flame.

## Section 6: Accidental Release Measures

**Small Spill:**

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

**Large Spill:**

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

**Precautions:**

Do not ingest. Do not breathe dust. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents, reducing agents.

**Storage:** Keep container tightly closed. Keep container in a cool, well-ventilated area. Do not store above

## Section 8: Exposure Controls/Personal Protection

### Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

### Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

### Exposure Limits:

TWA: 0.1 (mg/m<sup>3</sup>) from ACGIH (TLV) [United States] TWA: 5 (mg/m<sup>3</sup>) [Canada] TWA: 1 STEL: 3 (mg/m<sup>3</sup>) from NIOSH [United States] TWA: 5 (mg/m<sup>3</sup>) from OSHA (PEL) [United States] Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Powdered solid.)

**Odor:** Odorless.

**Taste:** Not available.

**Molecular Weight:** 54.94 g/mole

**Color:** Grayish white.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 2095°C (3803°F)

**Melting Point:** 1244°C (2271.2°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 7.44 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Insoluble in cold water, hot water.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Incompatible materials

**Incompatibility with various substances:** Reactive with oxidizing agents, reducing agents.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:**

Superficially oxidized on exposure to air. Reacts with aqueous solutions of sodium or potassium bicarbonate. Reacts with dilute mineral acids with evolution of hydrogen and formation of divalent manganous salts. Reacts with fluorine and chlorine to produce di or tri fluoride, and di and tri chloride, respectively. In the form of powder, it reduces most metallic oxides on heating. On heating, it reacts directly with carbon, phosphorus, antimony, or arsenic. Also incompatible with hydroxides, cyanides, carbonates.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:** Acute oral toxicity (LD50): 9000 mg/kg [Rat].

**Chronic Effects on Humans:** May cause damage to the following organs: blood, lungs, brain, central nervous system (CNS).

**Other Toxic Effects on Humans:**

Hazardous in case of inhalation. Slightly hazardous in case of skin contact (irritant), of ingestion.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:**

Manganese can cross the placenta. May cause cancer (tumorigenic) based on animal data.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects: Skin: May cause skin irritation Eyes: Dust may cause mechanical irritation. Inhalation: Dust may cause respiratory tract irritation. May cause "Metal Fume Fever" which may include flu-like symptoms (fever, chills, upset stomach, vomiting, weakness, headache, body aches, muscle pains, dry mouth and throat, coughing, tightness of the chest). May affect behavior/Central Nervous system (change in motor activity, torpor, nervousness, tremor, yawning, mood swings, irritability, restlessness, fatigue, headache, apathy, languor, insomnia than somnolence, hallucinations, delusions, uncontrollable laughter followed by crying, compulsions, aggressiveness, weakness in legs, memory loss, decreased libido, impotence, salivation, hearing loss, slow gait, ), and respiration (dyspnea, shallow respiration, cyanosis, alveolar inflammation). Ingestion: Repeated or prolonged exposure from ingestion may affect brain (degenerative changes), blood and metabolism. Ingestion: May cause digestive tract irritation. There is a low gastrointestinal absorption of manganese. Chronic Potential Health Effects: Inhalation: Repeated or prolonged exposure from inhalation may affect brain (degenerative changes), behavior/Central Nervous system with symptoms to acute exposure. May also affect liver (chronic liver disease, jaundice) Ingestion: Repeated or prolonged exposure from ingestion may affect brain, blood and metabolism

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The product itself and its products of degradation are not toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

### Section 13: Disposal Considerations

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

### Section 14: Transport Information

**DOT Classification:** Not a DOT controlled material (United States).

**Identification:** Not applicable.

**Special Provisions for Transport:** Not applicable.

### Section 15: Other Regulatory Information

**Federal and State Regulations:**

Illinois toxic substances disclosure to employee act: Manganese Rhode Island RTK hazardous substances: Manganese Pennsylvania RTK: Manganese Minnesota: Manganese Massachusetts RTK: Manganese New Jersey: Manganese New Jersey spill list: Manganese Louisiana spill reporting: Manganese California Director's List of Hazardous Substances: Manganese TSCA 8(b) inventory: Manganese SARA 313 toxic chemical notification and release reporting: Manganese

**Other Regulations:**

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):** Not controlled under WHMIS (Canada).

**DSCL (EEC):** Not applicable.

**HMIS (U.S.A.):**

**Health Hazard:** 1

**Fire Hazard:** 0

**Reactivity:** 0

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 1

**Flammability:** 0

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Safety glasses.

### Section 16: Other Information


**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/09/2005 06:03 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	3
Fire	0
Reactivity	0
Personal Protection	

## Material Safety Data Sheet

### Mercury MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Mercury

**Catalog Codes:** SLM3505, SLM1363

**CAS#:** 7439-97-6

**RTECS:** OV4550000

**TSCA:** TSCA 8(b) inventory: Mercury

**CI#:** Not applicable.

**Synonym:** Quick Silver; Colloidal Mercury; Metallic Mercury; Liquid Silver; Hydragryum

**Chemical Name:** Mercury

**Chemical Formula:** Hg

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Mercury	7439-97-6	100

**Toxicological Data on Ingredients:** Mercury LD50: Not available. LC50: Not available.

#### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Very hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Hazardous in case of skin contact (corrosive, permeator). Liquid or spray mist may produce tissue damage particularly on mucous membranes of eyes, mouth and respiratory tract. Skin contact may produce burns. Inhalation of the spray mist may produce severe irritation of respiratory tract, characterized by coughing, choking, or shortness of breath. Severe over-exposure can result in death. Inflammation of the eye is characterized by redness, watering, and itching. Skin inflammation is characterized by itching, scaling, reddening, or, occasionally, blistering.

**Potential Chronic Health Effects:**

Hazardous in case of skin contact (permeator). CARCINOGENIC EFFECTS: Classified A5 (Not suspected for human.) by ACGIH. 3 (Not classifiable for human.) by IARC. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to blood, kidneys, liver, brain, peripheral nervous system, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage. Repeated or prolonged contact with spray mist may produce chronic eye irritation and severe skin irritation.

Repeated or prolonged exposure to spray mist may produce respiratory tract irritation leading to frequent attacks of bronchial infection. Repeated exposure to a highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

#### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Cold water may be used. WARM water MUST be used. Get medical attention immediately.

**Skin Contact:**

In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Cover the irritated skin with an emollient. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention immediately.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention immediately.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

**Serious Ingestion:** Not available.

#### Section 5: Fire and Explosion Data

**Flammability of the Product:** Non-flammable.

**Auto-Ignition Temperature:** Not applicable.

**Flash Points:** Not applicable.

**Flammable Limits:** Not applicable.

**Products of Combustion:** Not available.

**Fire Hazards in Presence of Various Substances:** Not applicable.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:** Not applicable.

**Special Remarks on Fire Hazards:**

When thrown into mercury vapor, boron phosphodiiodide ignites at once. Flame forms with chlorine jet over mercury surface at 200 deg to 300 deg C. Mercury undergoes hazardous reactions in the presence of heat and sparks or ignition.

**Special Remarks on Explosion Hazards:**

A violent exothermic reaction or possible explosion occurs when mercury comes in contact with lithium and rubidium. CHLORINE DIOXIDE & LIQUID HG, WHEN MIXED, EXPLODE VIOLENTLY. Mercury and Ammonia can produce an



explosive compound. A mixture of the dry carbonyl and oxygen will explode on vigorous shaking with mercury. Methyl azide in the presence of mercury was shown to be potentially explosive.

## Section 6: Accidental Release Measures

**Small Spill:** Absorb with an inert material and put the spilled material in an appropriate waste disposal.

**Large Spill:**

Corrosive liquid. Poisonous liquid. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not get water inside container. Do not touch spilled material. Use water spray curtain to divert vapor drift. Use water spray to reduce vapors. Prevent entry into sewers, basements or confined areas; dike if needed. Call for assistance on disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

**Precautions:**

Keep locked up.. Keep container dry. Do not ingest. Do not breathe gas/fumes/ vapor/spray. Never add water to this product. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, metals.

**Storage:** Keep container tightly closed. Keep container in a cool, well-ventilated area. Do not store above 25°C (77°F).

## Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

**Personal Protection:**

Face shield. Full suit. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves. Boots.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 0.025 from ACGIH (TLV) [United States] SKIN TWA: 0.05 CEIL: 0.1 (mg/m<sup>3</sup>) from OSHA (PEL) [United States]  
Inhalation TWA: 0.025 (mg/m<sup>3</sup>) [United Kingdom (UK)] Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Liquid. (Heavy liquid)

**Odor:** Odorless.

**Taste:** Not available.

**Molecular Weight:** 200.59 g/mole

**Color:** Silver-white

**pH (1% soln/water):** Not available.

**Boiling Point:** 356.73°C (674.1°F)

**Melting Point:** -38.87°C (-38°F)

**Critical Temperature:** 1462°C (2663.6°F)

**Specific Gravity:** 13.55 (Water = 1)

**Vapor Pressure:** Not available.

**Vapor Density:** 6.93 (Air = 1)

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Very slightly soluble in cold water.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Incompatible materials

**Incompatibility with various substances:** Reactive with oxidizing agents, metals.

**Corrosivity:** Non-corrosive in presence of glass.

### Special Remarks on Reactivity:

Ground mixtures of sodium carbide and mercury, aluminum, lead, or iron can react vigorously. A violent exothermic reaction or possible explosion occurs when mercury comes in contact with lithium and rubidium. Incompatible with boron diiodophosphide; ethylene oxide; metal oxides, metals(aluminum, potassium, lithium, sodium, rubidium); methyl azide; methylsilane, oxygen; oxidants(bromine, peroxyformic acid, chlorine dioxide, nitric acid, tetracarbonylnickel, nitromethane, silver perchlorate, chlorates, sulfuric acid, nitrates,); tetracarbonylnickel, oxygen, acetylinic compounds, ammonia, ethylene oxide, methylsilane, calcium,

### Special Remarks on Corrosivity:

The high mobility and tendency to dispersion exhibited by mercury, and the ease with which it forms alloys (amalgam) with many laboratory and electrical contact metals, can cause severe corrosion problems in laboratories. Special precautions: Mercury can attack copper and copper alloy materials.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Absorbed through skin. Dermal contact. Eye contact. Inhalation. Ingestion.

### Toxicity to Animals:

LD50: Not available. LC50: Not available.

### Chronic Effects on Humans:

CARCINOGENIC EFFECTS: Classified A5 (Not suspected for human.) by ACGIH. 3 (Not classifiable for human.) by IARC. May cause damage to the following organs: blood, kidneys, liver, brain, peripheral nervous system, central nervous system (CNS).

### Other Toxic Effects on Humans:

Very hazardous in case of skin contact (irritant), of ingestion, of inhalation. Hazardous in case of skin contact (corrosive, permeator).

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:**

May affect genetic material. May cause cancer based on animal data. Passes through the placental barrier in animal. May cause adverse reproductive effects(paternal effects- spermatogenesis; effects on fertility - fetotoxicity, post-implantation mortality), and birth defects.

**Special Remarks on other Toxic Effects on Humans:**

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are less toxic than the product itself.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

## Section 14: Transport Information

**DOT Classification:** Class 8: Corrosive material

**Identification:** : Mercury UNNA: 2809 PG: III

**Special Provisions for Transport:** Not available.

## Section 15: Other Regulatory Information

**Federal and State Regulations:**

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Mercury California prop. 65: This product contains the following ingredients for which the State of California has found to cause birth defects which would require a warning under the statute: Mercury Connecticut hazardous material survey.: Mercury Illinois toxic substances disclosure to employee act: Mercury Illinois chemical safety act: Mercury New York acutely hazardous substances: Mercury Rhode Island RTK hazardous substances: Mercury Pennsylvania RTK: Mercury Minnesota: Mercury Massachusetts RTK: Mercury New Jersey: Mercury New Jersey spill list: Mercury Louisiana spill reporting: Mercury California Director's List of Hazardous Substances.: Mercury TSCA 8(b) inventory: Mercury SARA 313 toxic chemical notification and release reporting: Mercury CERCLA: Hazardous substances.: Mercury: 1 lbs. (0.4536 kg)

**Other Regulations:**

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):**

CLASS D-1A: Material causing immediate and serious toxic effects (VERY TOXIC). CLASS D-2A: Material causing other toxic effects (VERY TOXIC). CLASS E: Corrosive liquid.

**DSCL (EEC):**

R23- Toxic by inhalation. R33- Danger of cumulative effects. R38- Irritating to skin. R41- Risk of serious damage to eyes. R50/53- Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. S2- Keep out of the

reach of children. S7- Keep container tightly closed. S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S39- Wear eye/face protection. S45- In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). S46- If swallowed, seek medical advice immediately and show this container or label. S60- This material and its container must be disposed of as hazardous waste. S61- Avoid release to the environment. Refer to special instructions/Safety data sheets.

**HMIS (U.S.A.):**

**Health Hazard:** 3

**Fire Hazard:** 0

**Reactivity:** 0

**Personal Protection:**

**National Fire Protection Association (U.S.A.):**

**Health:** 3

**Flammability:** 0

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves. Full suit. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Face shield.

## Section 16: Other Information

**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:22 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



NFPA 704 (Section 16)

**AMERADA HESS CORPORATION****MATERIAL SAFETY DATA SHEET****HESS 10W40 Motor Oil****MSDS No. 14292****1. CHEMICAL PRODUCT and COMPANY INFORMATION****Amerada Hess Corporation**  
1 Hess Plaza  
Woodbridge, NJ 07095-0961**Manufactured by: The Valvoline Company**  
P.O. Box 14000  
Lexington, KY 40512**EMERGENCY TELEPHONE NUMBER:****VALVOLINE: 800-247-5263****COMPANY CONTACT (business hours):**

Valvoline Info: 606-357-7847

AHC Corporate Safety 732-750-6000

**SYNONYMS:** Valvoline Product Code 52670414

This product is manufactured by The Valvoline Company and packaged under the Amerada Hess ("Hess") label. The information in this MSDS has been developed by The Valvoline Company, MSDS No. 505.0164091-016.003I, date 5/11/99.

See Section 16 for abbreviations and acronyms.

**2. COMPOSITION and INFORMATION ON INGREDIENTS**

<u>INGREDIENT NAME</u>	<u>EXPOSURE LIMITS</u>	<u>CONCENTRATION</u>
		<u>PERCENT BY WEIGHT</u>
Aliphatic Petroleum Distillates CAS NUMBER: 64742-65-0	OSHA PEL-TWA: 5 mg/m <sup>3</sup> as mineral oil mist ACGIH TLV-TWA: 5 mg/m <sup>3</sup> as mineral oil mist	83.0 – 93.0
Detergent/ Dispersant Engine Oil Package	No exposure limits established	N/A
Zinc Compounds	No exposure limits established	N/A

Petroleum-based lubricating oil with detergent/dispersant engine oil package with zinc compounds.

**3. HAZARDS IDENTIFICATION****EYES**

May cause mild eye irritation. Symptoms include stinging, tearing, and redness.

**SKIN**

May cause mild skin irritation. Prolonged or repeated contact may dry the skin. Symptoms include redness, burning, drying and cracking of the skin, and skin burns. Additional symptoms of skin contact include: acne. Passage of this material into the body through the skin is possible, but it is unlikely that this would result in harmful effects during safe handling and use.

**INGESTION**

Swallowing small amounts of this material during normal handling is not likely to cause harmful effects. Swallowing large amounts may be harmful.

**INHALATION**

It is possible to breathe this material under certain conditions of handling and use (for example, during heating, spraying, or stirring). Breathing small amounts of this material during normal handling is not likely to cause harmful effects. Breathing large amounts may be harmful. Symptoms usually occur at air concentrations higher than the recommended exposure limits.

**SYMPTOMS OF EXPOSURE**

Signs and symptoms of exposure to this material through breathing, swallowing, and/or passage of the material through the skin may include: stomach or intestinal upset, (nausea, vomiting, diarrhea), irritation (nose, throat, airways), blood abnormalities (breakage of blood cells), liver damage.

**TARGET ORGAN EFFECTS**

No data

# AMERADA HESS CORPORATION

## MATERIAL SAFETY DATA SHEET

**HESS 10W40 Motor Oil**

**MSDS No. 14292**

### **DEVELOPMENTAL INFORMATION**

There are no data available for assessing risk to the fetus from maternal exposure to this material.

### **CANCER INFORMATION**

This material is not listed as a carcinogen by IARC, NTP, or OSHA. Used motor oil has been shown to cause skin cancer in laboratory animal continually exposed by repeated applications. Avoid prolonged or repeated skin contact.

### **OTHER HEALTH EFFECTS**

No data

## **4. FIRST AID MEASURES**

### **EYES**

If symptoms develop, move individual away from exposure and into fresh air. Flush eyes gently with water while holding eyelids apart. If symptoms persist or there is visual difficulty, seek medical attention.

### **SKIN**

Remove contaminated clothing. Wash exposed area with soap and water. If symptoms persist, seek medical attention. Launder clothing before reuse.

### **INGESTION**

Seek medical attention. If individual is drowsy or unconscious, do not give anything by mouth; place individual on the left side with the head down. Contact a physician, medical facility, or poison control center for advice about whether to induce vomiting. If possible, do not leave individual unattended.

### **INHALATION**

If symptoms develop, move individual away from exposure and into fresh air. If symptoms persist, seek medical attention. If breathing is difficult, administer oxygen. Keep person warm and quiet; seek immediate medical attention.

### **Note to Physicians**

Acute aspiration of large amounts of oil-laden material may produce a serious aspiration hazard. Patients who aspirate these oils should be followed for the development of long-term sequelae. Repeated aspiration of mineral oil can produce chronic inflammation of the lungs (i.e. lipoid pneumonia) that may progress to pulmonary fibrosis. Symptoms are often subtle and radiological changes appear worse than clinical abnormalities. Occasionally, persistent cough, irritation of the upper respiratory tract, shortness of breath with exertion, fever, and bloody sputum occur. Inhalation exposure to oil mists below current workplace exposure limits is unlikely to cause pulmonary abnormalities. Preexisting disorders of the following organs (or organ systems) may be aggravated by exposure to this material: skin.

## **5. FIRE FIGHTING MEASURES**

### **FLAMMABLE PROPERTIES:**

FLASH POINT:	435.0 °F (223.8 °C) COC
AUTOIGNITION POINT:	No data
EXPLOSIVE LIMITS (%):	No data

### **HAZARDOUS PRODUCTS OF COMBUSTION**

May form: carbon dioxide and carbon monoxide, oxides of sulfur, nitrogen and phosphorous, various hydrocarbons.

### **FIRE AND EXPLOSION HAZARDS**

Never use welding or cutting torch on or near drum (even empty) because product (even just residue) can ignite explosively. No special fire hazards are known to be associated with this product. Dense smoke may be generated while burning.

### **EXTINGUISHING MEDIA**

Regular fire fighting foam, carbon dioxide, dry chemical.

# AMERADA HESS CORPORATION

## MATERIAL SAFETY DATA SHEET

**HESS 10W40 Motor Oil**

**MSDS No. 14292**

### **FIRE FIGHTING INSTRUCTIONS**

Water or foam may cause frothing which can be violent and possibly endanger the life of the firefighter. Water may be used to keep fire-exposed containers cool until fire is out. Wear a self-contained breathing apparatus with full facepiece operated in the pressure-demand mode with appropriate turnout gear and chemical resistant personal protective equipment. Refer to Section 8.

See Section 16 for the NFPA 704 Hazard Rating.

### **6. ACCIDENTAL RELEASE MEASURES**

**SMALL SPILL:** Absorb liquid on vermiculite, floor absorbent or other absorbent material. Persons not wearing proper personal protective equipment should be excluded from area of spill.

**LARGE SPILL:** Prevent run-off to sewers, streams, or other bodies of water. If run-off occurs, notify authorities as required, that a spill has occurred. Persons not wearing proper personal protective equipment should be excluded from area of spill until clean-up has been completed.

### **7. HANDLING and STORAGE**

#### **HANDLING PRECAUTIONS**

Containers of this material may be hazardous when emptied. Since emptied containers retain product residues (vapor, liquid, and/or solid), all hazard precautions given in the data sheet must be observed. All five gallon pails and larger metal containers including tank cars and tank trucks should be grounded and/or bonded when material is transferred. Precautions during use: avoid prolonged or frequently repeated skin contact with this material. Skin contact can be minimized by wearing impervious protective gloves. As with all products of this nature, good personal hygiene is essential. Hands and other exposed areas should be washed thoroughly with soap and water after contact, especially before eating and/or smoking. Regular laundering of contaminated clothing is essential to reduce indirect skin contact with this material. Warning. Sudden release of hot organic chemical vapors or mists from process equipment operating at elevated temperature and pressure, or sudden ingress of air into vacuum equipment, may result in ignitions without the presence of obvious ignition sources. Published "autoignition" or "ignition" temperature values cannot be treated as safe operating temperatures in chemical processes without analysis of the actual process conditions. Any use of this product in elevated temperature processes should be thoroughly evaluated to establish and maintain safe operating conditions.

#### **STORAGE PRECAUTIONS**

Do not store near extreme heat, open flame, or sources of ignition.

### **8. EXPOSURE CONTROLS and PERSONAL PROTECTION**

#### **ENGINEERING CONTROLS**

Provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below TLV(s).

#### **EYE PROTECTION**

Not required under normal conditions of use. However, if misting or splashing conditions exist, then safety glasses or chemical splash goggles are advised.

#### **SKIN PROTECTION**

Not normally required. However, wear resistant gloves such as nitrile rubber to prevent irritation which may result from prolonged or repeated skin contact with product., To prevent repeated or prolonged skin contact, wear impervious clothing and boots. Wear normal work clothing covering arms and legs..

#### **RESPIRATORY PROTECTION**

If workplace exposure limit(s) of product or any component is exceeded (See Exposure Guidelines), a NIOSH/MSHA approved air supplied respirator is advised in absence of proper environmental control. OSHA regulations also permit other NIOSH/MSHA respirators (negative pressure type) under specified conditions (consult your industrial hygienist). Engineering or administrative controls should be implemented to reduce exposure. Not required under normal conditions of use. However, if oil mists are

# AMERADA HESS CORPORATION

## MATERIAL SAFETY DATA SHEET

**HESS 10W40 Motor Oil**

**MSDS No. 14292**

generated above recommended PEL/TLV of 5 mg/m<sup>3</sup>, then a NIOSH/MSHA approved respirator is advised in absence of proper environmental control. (See your industrial hygienist.)

### 9. PHYSICAL and CHEMICAL PROPERTIES

#### APPEARANCE

Dry, clear, and bright liquid

#### ODOR

No data

#### BASIC PHYSICAL PROPERTIES

BOILING RANGE: (for component) > 425.0 F (218.3 C) @ 760.00 mmHg  
VAPOR PRESSURE: No data  
VAPOR DENSITY (air = 1): No data  
LIQUID DENSITY: 7.340 lbs/gal @ 60.00 F (.881 kg/l @ 15.60 C)  
SPECIFIC GRAVITY (H<sub>2</sub>O = 1): 0.881 @ 60F  
PERCENT VOLATILES: No data  
EVAPORATION RATE: Slower than ethyl ether  
pH: No data  
VISCOSITY: <= 3300.0 cps @ -20 C; 13.5 – 14.5 cst @ 100 C

### 10. STABILITY and REACTIVITY

**STABILITY:** Stable. Product will not undergo hazardous polymerization.

#### INCOMPATIBLE MATERIALS

Avoid contact with: acids, halogens, strong oxidizing agents.

#### HAZARDOUS DECOMPOSITION PRODUCTS

May form: aldehydes, carbon dioxide and carbon monoxide, hydrogen sulfide, oxides of sulfur, nitrogen and phosphorus, toxic fumes, various hydrocarbons.

### 11. TOXICOLOGICAL PROPERTIES

No data

### 12. ECOLOGICAL INFORMATION

No data

### 13. DISPOSAL CONSIDERATIONS

Dispose of in accordance with all applicable local, state and federal regulations.

### 14. TRANSPORTATION INFORMATION

DOT Information - 49 CFR 172.101  
DOT Description: Not Regulated  
Container/Mode: CASES/SURFACE - NO EXCEPTIONS  
NOS Component: None  
RQ (Reportable Quantity) - 49 CFR 172.101: Not applicable

### 15. REGULATORY INFORMATION

#### TSCA (Toxic Substances Control Act) Status (UNITED STATES)

The intentional ingredients of this product are listed.

**CERCLA RQ - 40 CFR 302.4:** None

**SARA 302 Components - 40 CFR 355 Appendix A:** None

#### SARA Section 311/312 Hazard Class - 40 CFR 370.2

Immediate (X) Delayed (X) Fire(--) Reactive (--) Sudden Release of Pressure (--)



# AMERADA HESS CORPORATION

## MATERIAL SAFETY DATA SHEET

**HESS 10W40 Motor Oil**

**MSDS No. 14292**

**SARA 313 Components - 40 CFR 372.65 Section 313 Component(s) and CAS Number:**

ZINC C1-C14 ALKYL DITHIOPHOSPHATE (CAS No. 68649-42-3)

**International Regulations Inventory Status:** Not determined

**State and Local Regulations:** California Proposition 65 None

### 16. OTHER INFORMATION

<b><u>NFPA® HAZARD RATING</u></b>	HEALTH:	1	Slight
	FIRE:	1	Slight
	REACTIVITY:	0	Negligible

<b><u>HMIS® HAZARD RATING</u></b>	HEALTH:	1*	Slight
	FIRE:	1	Slight
	REACTIVITY:	0	Negligible
			* Chronic

**OTHER:** The information presented in this MSDS was taken directly from the MSDS for this product prepared by The Valvoline Company, the manufacturer of the product – see Section 2.

**ABBREVIATIONS:**


AP = Approximately      < = Less than      > = Greater than  
N/A = Not Applicable      N/D = Not Determined      ppm = parts per million

**ACRONYMS:**

ACGIH	American Conference of Governmental Industrial Hygienists	NTP	National Toxicology Program
AIHA	American Industrial Hygiene Association	OPA	Oil Pollution Act of 1990
ANSI	American National Standards Institute (212) 642-4900	OSHA	U.S. Occupational Safety & Health Administration
API	American Petroleum Institute (202) 682-8000	PEL	Permissible Exposure Limit (OSHA)
CERCLA	Comprehensive Emergency Response, Compensation, and Liability Act	RCRA	Resource Conservation and Recovery Act
DOT	U.S. Department of Transportation [General info: (800) 467-4922]	REL	Recommended Exposure Limit (NIOSH)
EPA	U.S. Environmental Protection Agency	SARA	Superfund Amendments and Reauthorization Act of 1986 Title III
HMIS	Hazardous Materials Information System	SCBA	Self-Contained Breathing Apparatus
IARC	International Agency For Research On Cancer	SPCC	Spill Prevention, Control, and Countermeasures
MSHA	Mine Safety and Health Administration	STEL	Short-Term Exposure Limit (generally 15 minutes)
NFPA	National Fire Protection Association (617) 770-3000	TLV	Threshold Limit Value (ACGIH)
NIOSH	National Institute of Occupational Safety and Health	TSCA	Toxic Substances Control Act
NOIC	Notice of Intended Change (proposed change to ACGIH TLV)	TWA	Time Weighted Average (8 hr.)
		WEEL	Workplace Environmental Exposure Level (AIHA)
		WHMIS	Canadian Workplace Hazardous Materials Information System

**DISCLAIMER OF EXPRESSED AND IMPLIED WARRANTIES (The Valvoline Company)**

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances.



Health	2
Fire	0
Reactivity	0
Personal Protection	E

## Material Safety Data Sheet

### Nickel metal MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Nickel metal

**Catalog Codes:** SLN2296, SLN1342, SLN1954

**CAS#:** 7440-02-0

**RTECS:** QR5950000

**TSCA:** TSCA 8(b) inventory: Nickel metal

**CI#:** Not applicable.

**Synonym:** Nickel Metal shot; Nickel metal foil.

**Chemical Name:** Nickel

**Chemical Formula:** Ni

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Nickel metal	7440-02-0	100

**Toxicological Data on Ingredients:** Nickel metal LD50: Not available. LC50: Not available.

#### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Hazardous in case of inhalation. Slightly hazardous in case of skin contact (irritant, sensitizer), of eye contact (irritant), of ingestion.

**Potential Chronic Health Effects:**

Slightly hazardous in case of skin contact (sensitizer), of ingestion, of inhalation (lung sensitizer). **CARCINOGENIC EFFECTS:** Classified 2B (Possible for human.) by IARC. Classified 2 (Some evidence.) by NTP. **MUTAGENIC EFFECTS:** Not available. **TERATOGENIC EFFECTS:** Not available. **DEVELOPMENTAL TOXICITY:** Not available. The substance is toxic to skin. The substance may be toxic to kidneys, lungs, liver, upper respiratory tract. Repeated or prolonged exposure to the substance can produce target organs damage.

#### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

**Skin Contact:**

In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Cover the irritated skin with an emollient. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

**Serious Skin Contact:** Not available.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:** Not available.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Non-flammable.

**Auto-Ignition Temperature:** Not applicable.

**Flash Points:** Not applicable.

**Flammable Limits:** Not applicable.

**Products of Combustion:** Not available.

**Fire Hazards in Presence of Various Substances:** Not applicable.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

Flammable solid. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:** Material in powder form, capable of creating a dust explosion. This material is flammable in powder form only.

**Special Remarks on Explosion Hazards:**

Material in powder form, capable of creating a dust explosion. Mixtures containing Potassium Perchlorate with Nickel & Titanium powders & infusorial earth can explode. Adding 2 or 3 drops of approximately 90% peroxyformic acid to powdered nickel will result in explosion. Powdered nickel reacts explosively upon contact with fused ammonium nitrate at temperatures below 200 deg. C.

## Section 6: Accidental Release Measures

**Small Spill:**

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

**Large Spill:**

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

### Precautions:

Keep locked up.. Do not breathe dust. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If you feel unwell, seek medical attention and show the label when possible. Keep away from incompatibles such as oxidizing agents, combustible materials, metals, acids.

**Storage:** Keep container tightly closed. Keep container in a cool, well-ventilated area.

## Section 8: Exposure Controls/Personal Protection

### Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

### Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

### Exposure Limits:

TWA: 1 (mg/m<sup>3</sup>) from ACGIH (TLV) [United States] Inhalation Respirable. TWA: 0.5 (mg/m<sup>3</sup>) [United Kingdom (UK)] TWA: 1 (mg/m<sup>3</sup>) from OSHA (PEL) [United States] Inhalation Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Metal solid. Lustrous solid.)

**Odor:** Odorless.

**Taste:** Not available.

**Molecular Weight:** 58.71 g/mole

**Color:** Silvery.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 2730°C (4946°F)

**Melting Point:** 1455°C (2651°F)

**Critical Temperature:** Not available.

**Specific Gravity:** Density: 8.908 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:**

Insoluble in cold water, hot water. Insoluble in Ammonia. Soluble in dilute Nitric Acid. Slightly soluble in Hydrochloric Acid, Sulfuric Acid.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Incompatible materials

**Incompatibility with various substances:** Reactive with oxidizing agents, combustible materials, metals, acids.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:**

Incompatible with strong acids, selenium, sulfur, wood and other combustibles, nickel nitrate, aluminum, aluminum trichloride, ethylene, p-dioxan, hydrogen, methanol, non-metals, oxidants, sulfur compounds, aniline, hydrogen sulfide, flammable solvents, hydrazine, and metal powders (especially zinc, aluminum, and magnesium), ammonium nitrate, nitryl fluoride, bromine pentafluoride, potassium perchlorate + titanium powder + indusorial earth.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available. LC50: Not available.

**Chronic Effects on Humans:**

CARCINOGENIC EFFECTS: Classified 2B (Possible for human.) by IARC. Classified 2 (Some evidence.) by NTP. Causes damage to the following organs: skin. May cause damage to the following organs: kidneys, lungs, liver, upper respiratory tract.

**Other Toxic Effects on Humans:**

Hazardous in case of inhalation. Slightly hazardous in case of skin contact (irritant, sensitizer), of ingestion.

**Special Remarks on Toxicity to Animals:**

Lowest Published Lethal Dose/Conc: LDL [Rat] - Route: Oral; Dose: 5000 mg/kg LDL [Guinea Pig] - Route: Oral; Dose: 5000 mg/kg

**Special Remarks on Chronic Effects on Humans:** May cause cancer based on animal test data

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects: Skin: Nickel dust and fume can irritate skin. Eyes: Nickel dust and fume can irritate eyes. Inhalation: Inhalation of dust or fume may cause respiratory tract irritation with non-productive cough, hoarseness, sore throat, headache, vertigo, weakness, chest pain, followed by delayed effects, including tachypnea, dyspnea, and ARDS. Death due to ARDS has been reported following inhalation of high concentrations of respirable metallic nickel dust. Later effects may include pulmonary edema and fibrosis. Ingestion: Metallic nickel is generally considered not to be acutely toxic if ingested. Ingestion may cause nausea, vomiting, abdominal , and diarrhea. Nickel may damage the kidneys(proteinuria), and may affect liver function. It may also affect behavior (somnolence), and cardiovascular system (increased coronary artery resistance, decreased myocardial contractility, myocardial damage, regional or general arteriolar or venus dilation). Chronic Potential Health Effects: Skin: May cause skin allergy. Nickel and nickel compounds are among the most common sensitizers inducing allergic contact dermatitis. Inhalation: Chronic inhalation nickel dust or fume can cause chronic hypertrophic rhinitis, sinusitis, nasal polyps, perforation of the nasal septum, chronic pulmonary irritation, fibrosis, pulmonary edema, pulmonary eosinophilia, Pneumoconiosis, allergies (asthma-like allergy), and cancer of the nasal sinus cavities, lungs, and possibly other organs. Future exposures can cause asthma attacks with shortness of breath, wheezing, cough, and/or chest tightness. Chronic inhalation of nickel dust or fume may also affect the liver (impaired liver function tests), and blood (changes in red blood cell count). Ingestion: Prolonged or repeated ingestion of nickel can be a source chronic urticaria and other signs of allergy.

Chronic ingestion of Nickel may also affect respiration and cause pneumoconiosis or fibrosis. Note: In the general population, sensitization occurs from exposure to nickel-containing coins, jewelry, watches,

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are as toxic as the original product.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

## Section 14: Transport Information

**DOT Classification:** Not a DOT controlled material (United States).

**Identification:** Not applicable.

**Special Provisions for Transport:** Not applicable.

## Section 15: Other Regulatory Information

**Federal and State Regulations:**

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Nickel metal California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Nickel metal Connecticut hazardous material survey.: Nickel metal Illinois toxic substances disclosure to employee act: Nickel metal Illinois chemical safety act: Nickel metal New York release reporting list: Nickel metal Rhode Island RTK hazardous substances: Nickel metal Pennsylvania RTK: Nickel metal Michigan critical material: Nickel metal Massachusetts RTK: Nickel metal Massachusetts spill list: Nickel metal New Jersey: Nickel metal New Jersey spill list: Nickel metal Louisiana spill reporting: Nickel metal California Director's List of Hazardous Substances: Nickel metal TSCA 8(b) inventory: Nickel metal

**Other Regulations:**

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):** CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

**DSCL (EEC):**

R40- Possible risks of irreversible effects. R43- May cause sensitization by skin contact. S22- Do not breathe dust. S36- Wear suitable protective clothing.

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 0

**Reactivity:** 0

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 2

**Flammability:** 0

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

## Section 16: Other Information

**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:42 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*

ACCUSTANDARD INC -- M-525-1-5X PAH MIXTURES 0.5 MG/ML FOR METHOD

## MSDS Safety Information

FSC: 6550

MSDS Date: 10/26/1994

MSDS Num: CFCBJ

LIIN: 00F050479

Product ID: M-525-1-5X PAH MIXTURES 0.5 MG/ML FOR METHOD 525

MFN: 01

Responsible Party

Cage: 0U4A8

Name: ACCUSTANDARD INC

Address: 25 SCIENCE PK SUITE 687

City: NEW HAVEN CT 06511-5000

Info Phone Number: 203-786-5290

Emergency Phone Number: 203-786-5290

Review Ind: Y

Published: Y

Preparer Co. when other than Responsible Party Co.

Cage: 0U4A8

Name: ACCUSTANDARD INC

Address: 125 MARKET ST

City: NEW HAVEN CT 06513

## Contractor Summary

Cage: 0U4A8

Name: ACCUSTANDARD INC

Address: 125 MARKET ST

City: NEW HAVEN CT 06513

Phone: 800-442-5290

## Ingredients

Cas: 208-96-8

RTECS #: AB1254000

Name: ACENAPHTHYLENE

% Wt: 0.05

EPA Rpt Qty: 5000 LBS

DOT Rpt Qty: 5000 LBS

Cas: 120-12-7

RTECS #: CA9350000

Name: ANTHRACENE (IARC CARCINOGEN - GROUP 3) \*96-2\*

% Wt: 0.05

EPA Rpt Qty: 5000 LBS

DOT Rpt Qty: 5000 LBS

Cas: 56-55-3

RTECS #: CV9275000

Name: BENZO (A) ANTHRACENE, BENZ (A) ANTHRACENE

% Wt: 0.05

EPA Rpt Qty: 10 LBS

DOT Rpt Qty: 10 LBS

Cas: 50-32-8

RTECS #: DJ3675000

Name: BENZO (A) PYRENE (SUSPECTED HUMAN CARCINOGEN BY ACHIGH & NTP, ANIMAL  
SUFFICIENT BY IARC, IARC GROUP 2A) \*96-2\*

% Wt: 0.05

ACGIH TLV: A2 CARCINOGEN



EPA Rpt Qty: 1 LB  
DOT Rpt Qty: 1 LB

-----  
Cas: 205-99-2  
RTECS #: DF6350000  
Name: BENZO (B) FLUORANTHENE (SUSPECTED CARCINOGEN BY NTP, IARC GROUP 2B)  
\*96-2\*  
% Wt: 0.05  
Other REC Limits: A2 CARCINOGEN  
EPA Rpt Qty: 1 LB  
DOT Rpt Qty: 1 LB

-----  
Cas: 191-24-2  
RTECS #: DI6200500  
Name: BENZO (GHI) PERYLENE  
% Wt: 0.05  
EPA Rpt Qty: 5000 LBS  
DOT Rpt Qty: 5000 LBS

-----  
Cas: 207-08-9  
RTECS #: DF6350000  
Name: BENZO (K) FLUORANTHENE  
% Wt: 0.05  
EPA Rpt Qty: 5000 LBS  
DOT Rpt Qty: 5000 LBS

-----  
Cas: 218-01-9  
RTECS #: GC0700000  
Name: CHRYSENE (SUSPECTED HUMAN CARCINOGEN BY ACGIH & IARC, IARC GROUP 3)  
\*96-2\*  
% Wt: 0.05  
ACGIH TLV: A2 CARCINOGEN  
EPA Rpt Qty: 100 LBS  
DOT Rpt Qty: 100 LBS

-----  
Cas: 53-70-3  
RTECS #: HN2625000  
Name: DIBENZ (A,H) ANTHRACENE  
% Wt: 0.05  
EPA Rpt Qty: 1 LB  
DOT Rpt Qty: 1 LB

-----  
Cas: 86-73-7  
RTECS #: LL5670000  
Name: FLUORENE  
% Wt: 0.05  
EPA Rpt Qty: 5000 LBS  
DOT Rpt Qty: 5000 LBS

-----  
Cas: 193-39-5  
RTECS #: NK9300000  
Name: INDENO (1,2,3,CD) PYRENE  
% Wt: 0.05  
EPA Rpt Qty: 100 LBS  
DOT Rpt Qty: 100 LBS

-----  
Cas: 85-01-8  
RTECS #: SE7175000  
Name: PHENANTHRENE  
% Wt: 0.05  
EPA Rpt Qty: 5000 LBS  
DOT Rpt Qty: 5000 LBS

-----  
Cas: 129-00-0  
RTECS #: UR2450000

Name: PYRENE  
 % Wt: 0.05  
 EPA Rpt Qty: 5000 LBS  
 DOT Rpt Qty: 5000 LBS

-----  
 Cas: 67-64-1  
 RTECS #: AL3150000  
 Name: ACETONE; DIMETHYL KETONE; 2-PROPANONE  
 % Wt: 99.35  
 OSHA PEL: 2400 MG/CUM  
 ACGIH TLV: 750 PPM  
 EPA Rpt Qty: 5000 LBS  
 DOT Rpt Qty: 5000 LBS

#### Health Hazards Data

Route Of Entry Inds - Inhalation: YES  
 Skin: NO  
 Ingestion: YES  
 Carcinogenicity Inds - NTP: YES  
 IARC: YES  
 OSHA: NO  
 Effects of Exposure: HARMFUL IF INHALED/SWALLOWED. PROLONGED EXPOSURE/HIGH CONCENTRATIONS MAY CAUSE IRRITATION OF EYES & RESPIRATORY TRACT. MAY CAUSE DAMAGE TO CENTRAL NERVOUS SYSTEM, LIVER & KIDNEYS. SKIN/EYES: IRRITATIO N.  
 Explanation Of Carcinogenicity: SEE INGREDIENTS  
 Signs And Symptions Of Overexposure: HEADACHE, DIZZINESS, NAUSEA, IRRITATION, NARCOSIS, UNCONSCIOUSNESS.  
 Medical Cond Aggravated By Exposure: SKIN CONDITIONS.  
 First Aid: SKIN: WASH THOROUGHLY W/SOAP & WATER. EYES: FLUSH THOROUGHLY W/WATER FOR 15 MINS. INHALATION: REMOVE TO FRESH AIR. GIVE CPR IF NEEDED. INGESTION: IF CONSCIOUS, DRINK WATER & INDUCE VOMITING IMMEDIATELY AS DIRECTED BY MEDICAL PERSONNEL. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON. OBTAIN MEDICAL ATTENTION IN ALL CASES.

#### Handling and Disposal

Spill Release Procedures: WEAR PROTECTIVE EQUIPMENT. ELIMINATE IGNITION SOURCES. CONTAIN THE RELEASE & ELIMINATE ITS SOURCE, W/O RISK.  
 Waste Disposal Methods: DISPOSE AS HAZARDOUS WASTE IAW/FEDERAL, STATE & LOCAL REGULATIONS.  
 Handling And Storage Precautions: KEEP CONTAINERS CLOSED. STORE IN A COOL AREA AWAY FROM IGNITION SOURCES & OXIDIZERS.  
 Other Precautions: DON'T BREATHE VAPOR, GET IN EYES. AVOID PROLONGED/REPEATED SKIN CONTACT.

#### Fire and Explosion Hazard Information

Flash Point Method: CC  
 Flash Point Text: 0F  
 Lower Limits: 2.6  
 Upper Limits: 12.8  
 Extinguishing Media: DRY CHEMICAL, ALCOHOL FOAM, WATER SPRAY, CO2.  
 Fire Fighting Procedures: USE WATER SPRAY TO COOL EXPOSED CONTAINERS. WEAR SCBA.  
 Unusual Fire/Explosion Hazard: DANGEROUS FIRE & EXPLOSIVE HAZARD. VAPORS CAN TRAVEL DISTANCES TO IGNITION SOURCES & FLASH BACK.

#### Control Measures

Respiratory Protection: IF WORKPLACE EXPOSURE LIMITS ARE EXCEEDED, USE NIOSH/MSHA APPROVED AIR SUPPLIED RESPIRATOR.  
 Ventilation: HANDLE/TRANSFER IN AN APPROVED FUME HOOD/ADEQUATE VENTILATION.  
 Protective Gloves: BUTYL RUBBER, POLYURETHANE, POLYETHYLENE

Eye Protection: SAFETY GLASSES W/SIDE SHIELDS  
 Other Protective Equipment: EYE WASH & SAFETY EQUIPMENT SHOULD BE READILY AVAILABLE.  
 Work Hygienic Practices: REMOVE/LAUNDER CONTAMINATED CLOTHING BEFORE REUSE. WASH THOROUGHLY AFTER HANDLING.  
 Supplemental Safety and Health: FOR RESEARCH & DEVELOPMENT USE ONLY. NOT FOR MANUFACTURING/COMMERCIAL PURPOSES.

=====

Physical/Chemical Properties

=====

B.P. Text: 132.8F  
 M.P/F.P Text: -137.2F  
 Vapor Pres: 184  
 Vapor Density: 2  
 Spec Gravity: 0.7905  
 Evaporation Rate & Reference: (BU AC =1): 14.48  
 Solubility in Water: MISCIBLE  
 Appearance and Odor: COLORLESS LIQUID W/PUNGENT ODOR.  
 Percent Volatiles by Volume: >99.9

=====

Reactivity Data

=====

Stability Indicator: YES  
 Stability Condition To Avoid: HEAT, IGNITION SOURCES.  
 Materials To Avoid: ACIDS, BASES, OXIDIZERS, POTASSIUM T-BUTOXIDE, NITRIC & SULFURIC ACID MIXTURE, BROMINE, CHLORINE.  
 Hazardous Decomposition Products: CARBON OXIDES.  
 Hazardous Polymerization Indicator: NO

=====

Toxicological Information

=====

=====

Ecological Information

=====

=====

MSDS Transport Information

=====

=====

Regulatory Information

=====

=====

Other Information

=====

=====

HAZCOM Label


=====

Product ID: M-525-1-5X PAH MIXTURES 0.5 MG/ML FOR METHOD 525  
 Cage: 0U4A8  
 Company Name: ACCUSTANDARD INC  
 Street: 125 MARKET ST  
 City: NEW HAVEN CT  
 Zipcode: 06513  
 Health Emergency Phone: 203-786-5290  
 Label Required IND: Y  
 Date Of Label Review: 10/12/1999  
 Status Code: A  
 Origination Code: G  
 Hazard And Precautions: HARMFUL IF INHALED/SWALLOWED. PROLONGED EXPOSURE/HIGH CONCENTRATIONS MAY CAUSE IRRITATION OF EYES & RESPIRATORY TRACT. MAY CAUSE DAMAGE TO CENTRAL NERVOUS SYSTEM, LIVER & KIDNEYS. SKIN/EYES: IRRITATIO N.

=====

Disclaimer (provided with this information by the compiling agencies): This information is formulated for use by elements of the Department of Defense. The United States of America in no manner whatsoever expressly or implied

warrants, states, or intends said information to have any application, use or viability by or to any person or persons outside the Department of Defense nor any person or persons contracting with any instrumentality of the United States of America and disclaims all liability for such use. Any person utilizing this instruction who is not a military or civilian employee of the United States of America should seek competent professional advice to verify and assume responsibility for the suitability of this information to their particular situation regardless of similarity to a corresponding Department of Defense or other government situation.



Health	3
Fire	3
Reactivity	2
Personal Protection	E

## Material Safety Data Sheet

### Sodium MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Sodium

**Catalog Codes:** SLS3505

**CAS#:** 7440-23-5

**RTECS:** VY0686000

**TSCA:** TSCA 8(b) inventory: Sodium

**CI#:** Not applicable.

**Synonym:** Natrium

**Chemical Name:** Sodium

**Chemical Formula:** Na

#### Contact Information:

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

##### Composition:

Name	CAS #	% by Weight
Sodium	7440-23-5	100

**Toxicological Data on Ingredients:** Sodium LD50: Not available. LC50: Not available.

#### Section 3: Hazards Identification

##### Potential Acute Health Effects:

Very hazardous in case of skin contact (irritant), of eye contact (irritant). Hazardous in case of skin contact (permeator), of ingestion, of inhalation. Inflammation of the eye is characterized by redness, watering, and itching. Skin inflammation is characterized by itching, scaling, reddening, or, occasionally, blistering.

##### Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. Repeated or prolonged exposure is not known to aggravate medical condition.

#### Section 4: First Aid Measures

**Eye Contact:** Check for and remove any contact lenses. Do not use an eye ointment. Seek medical attention.

**Skin Contact:**

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

**Inhalation:** Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

**Ingestion:**

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** 115°C (239°F)

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Some metallic oxides.

**Fire Hazards in Presence of Various Substances:**

Extremely flammable in presence of moisture. Highly flammable in presence of open flames and sparks, of heat.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

Flammable solid. Moisture reactive material. SMALL FIRE: Obtain advice on use of water. Use DRY chemical powder. LARGE FIRE: Use water spray or fog. Do not use water jet.

**Special Remarks on Fire Hazards:** When heated to decomposition it emits toxic fumes.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:** Use appropriate tools to put the spilled solid in a convenient waste disposal container.

**Large Spill:**

Flammable solid that, in contact with water, emits flammable gases. Stop leak if without risk. Do not get water inside container. Do not touch spilled material. Cover with dry earth, sand or other non-combustible material. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal.

## Section 7: Handling and Storage

**Precautions:**

Keep under inert atmosphere. Keep container dry. Do not breathe dust. Never add water to this product. In case of insufficient ventilation, wear suitable respiratory equipment. If you feel unwell, seek medical attention and show the label when possible. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, acids, moisture.

**Storage:**

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. Keep container dry. Keep in a cool place.

**Section 8: Exposure Controls/Personal Protection****Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:**

Splash goggles. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:** Not available.

**Section 9: Physical and Chemical Properties**

**Physical state and appearance:** Solid. (Metal solid.)

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 22.99 g/mole

**Color:** Silvery.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 881.4°C (1618.5°F)

**Melting Point:** 97.8°C (208°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 0.97 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Insoluble in cold water, hot water.

**Section 10: Stability and Reactivity Data**

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Not available.

**Incompatibility with various substances:**

Highly reactive with oxidizing agents, acids, moisture. The product reacts violently with water to emit flammable but non toxic gases.

**Corrosivity:** Not available.

**Special Remarks on Reactivity:** Not available.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** No.

## Section 11: Toxicological Information

**Routes of Entry:** Dermal contact. Eye contact. Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available. LC50: Not available.

**Chronic Effects on Humans:** Not available.

**Other Toxic Effects on Humans:**

Very hazardous in case of skin contact (irritant). Hazardous in case of skin contact (permeator), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Not available.

**Special Remarks on other Toxic Effects on Humans:** Material is destructive to tissue of the mucous membranes and upper respiratory tract.

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are more toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

**Waste Disposal:**

## Section 14: Transport Information

**DOT Classification:** CLASS 4.3: Material that emits flammable gases on contact with water.

**Identification:** : Sodium : UN1428 PG: I

**Special Provisions for Transport:** Not available.



## Section 15: Other Regulatory Information

### Federal and State Regulations:

Pennsylvania RTK: Sodium Massachusetts RTK: Sodium TSCA 8(b) inventory: Sodium CERCLA: Hazardous substances.: Sodium

**Other Regulations:** OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

### Other Classifications:

**WHMIS (Canada):** CLASS D-2B: Material causing other toxic effects (TOXIC).

### DSCL (EEC):

R17- Spontaneously flammable in air. R38- Irritating to skin. R41- Risk of serious damage to eyes.

### HMIS (U.S.A.):

**Health Hazard:** 3

**Fire Hazard:** 3

**Reactivity:** 2

**Personal Protection:** E

### National Fire Protection Association (U.S.A.):

**Health:** 3

**Flammability:** 3

**Reactivity:** 2

**Specific hazard:**

### Protective Equipment:

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

## Section 16: Other Information

### References:

-Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987. -SAX, N.I. Dangerous Properties of Industrial Materials. Toronto, Van Nostrand Reinold, 6e ed. 1984. -The Sigma-Aldrich Library of Chemical Safety Data, Edition II. -Guide de la loi et du règlement sur le transport des marchandises dangereuses au Canada. Centre de conformité international Ltée. 1986.

**Other Special Considerations:** Not available.

**Created:** 10/09/2005 06:28 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*

## Material Safety Data Sheet

Version 4.2

Revision Date 09/21/2012

Print Date 10/11/2012

---

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : *trans*-1,2-Dichloroethylene

Product Number : D62209

Brand : Aldrich

Supplier : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

Emergency Phone # (For both supplier and manufacturer) : (314) 776-6555

Preparation Information : Sigma-Aldrich Corporation  
Product Safety - Americas Region  
1-800-521-8956

---

2. HAZARDS IDENTIFICATION

## Emergency Overview

## OSHA Hazards

Flammable liquid

## Target Organs

Central nervous system, Liver, Kidney

## GHS Classification

Flammable liquids (Category 2)

Acute toxicity, Oral (Category 4)

Acute toxicity, Inhalation (Category 4)

Skin irritation (Category 2)

Eye irritation (Category 2A)

Acute aquatic toxicity (Category 3)

## GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H302 + H332

Harmful if swallowed or if inhaled

H315

Causes skin irritation.

H319

Causes serious eye irritation.

H402

Harmful to aquatic life.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P305 + P351 + P338

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

## HMIS Classification

Health hazard: 2  
Chronic Health Hazard: \*  
Flammability: 3  
Physical hazards: 0

**NFPA Rating**

Health hazard: 2  
Fire: 3  
Reactivity Hazard: 0

**Potential Health Effects**

**Inhalation** May be harmful if inhaled. Causes respiratory tract irritation.  
**Skin** Harmful if absorbed through skin. Causes skin irritation.  
**Eyes** Causes eye irritation.  
**Ingestion** Harmful if swallowed.

---

**3. COMPOSITION/INFORMATION ON INGREDIENTS**

Synonyms : trans-1,2-Dichloroethene  
trans-Acetylene dichloride

Formula : C<sub>2</sub>H<sub>2</sub>Cl<sub>2</sub>  
Molecular Weight : 96.94 g/mol

Component		Concentration
<b>trans-Dichloroethylene</b>		
CAS-No.	156-60-5	-
EC-No.	205-860-2	
Index-No.	602-026-00-3	

---

**4. FIRST AID MEASURES**

**General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

**If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

---

**5. FIREFIGHTING MEASURES**

**Conditions of flammability**

Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking.

**Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**Special protective equipment for firefighters**

Wear self contained breathing apparatus for fire fighting if necessary.

**Hazardous combustion products**

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

**Further information**

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### Personal precautions

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

### Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

---

## 7. HANDLING AND STORAGE

### Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

### Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Light sensitive. Air and moisture sensitive.

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### Components with workplace control parameters

Components	CAS-No.	Value	Control parameters	Basis
trans-Dichloroethylene	156-60-5	TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
Remarks	Central Nervous System impairment Eye irritation			

### Personal protective equipment

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Hand protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Eye protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin and body protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### Appearance

Form	liquid, clear
Colour	light yellow

### Safety data

pH	no data available
Melting point/freezing point	Melting point/range: 50 °C (122 °F) - lit.
Boiling point	48 °C (118 °F) - lit.
Flash point	6.0 °C (42.8 °F) - closed cup
Ignition temperature	no data available
Autoignition temperature	no data available
Lower explosion limit	9.7 %(V)
Upper explosion limit	12.8 %(V)
Vapour pressure	no data available
Density	1.257 g/mL at 25 °C (77 °F)
Water solubility	no data available
Partition coefficient: n-octanol/water	no data available
Relative vapour density	no data available
Odour	no data available
Odour Threshold	no data available
Evaporation rate	no data available

---

## 10. STABILITY AND REACTIVITY

### Chemical stability

Stable under recommended storage conditions.

### Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

### Materials to avoid

Oxidizing agents, Bases

### Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas  
Other decomposition products - no data available

---

## 11. TOXICOLOGICAL INFORMATION

### Acute toxicity

#### Oral LD50

LD50 Oral - rat - 1,235 mg/kg

LD50 Oral - mouse - 2,122 mg/kg

Remarks: Behavioral:Altered sleep time (including change in righting reflex). Behavioral:Somnolence (general depressed activity). Behavioral:Ataxia.

**Inhalation LC50**

LC50 Inhalation - rat - 24100 ppm

Remarks: Behavioral:Somnolence (general depressed activity).

**Dermal LD50**

LD50 Dermal - rabbit - > 5,000 mg/kg

Remarks: Prolonged skin contact may cause skin irritation and/or dermatitis. Nutritional and Gross Metabolic:Weight loss or decreased weight gain.

**Other information on acute toxicity**

no data available

**Skin corrosion/irritation**

Skin - rabbit - Skin irritation - 24 h

**Serious eye damage/eye irritation**

Eyes - rabbit - Eye irritation

**Respiratory or skin sensitization**

no data available

**Germ cell mutagenicity**

no data available

**Carcinogenicity**

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

no data available

**Teratogenicity**

no data available

**Specific target organ toxicity - single exposure (Globally Harmonized System)**

no data available

**Specific target organ toxicity - repeated exposure (Globally Harmonized System)**

no data available

**Aspiration hazard**

no data available

**Potential health effects**

<b>Inhalation</b>	May be harmful if inhaled. Causes respiratory tract irritation.
<b>Ingestion</b>	Harmful if swallowed.
<b>Skin</b>	Harmful if absorbed through skin. Causes skin irritation.
<b>Eyes</b>	Causes eye irritation.

**Signs and Symptoms of Exposure**

prolonged or repeated exposure can cause:, narcosis, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

**Synergistic effects**

no data available

**Additional Information**

RTECS: KV9400000

---

**12. ECOLOGICAL INFORMATION****Toxicity**

Toxicity to daphnia and other aquatic invertebrates      EC50 - Daphnia magna (Water flea) - 220.00 mg/l - 48 h

**Persistence and degradability**

no data available

**Bioaccumulative potential**

no data available

**Mobility in soil**

no data available

**PBT and vPvB assessment**

no data available

**Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Harmful to aquatic life.

---

**13. DISPOSAL CONSIDERATIONS****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1150    Class: 3    Packing group: II  
Proper shipping name: 1,2-Dichloroethylene  
Reportable Quantity (RQ): 1000 lbs  
Marine pollutant: No  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1150    Class: 3    Packing group: II    EMS-No: F-E, S-D  
Proper shipping name: 1,2-DICHLOROETHYLENE  
Marine pollutant: No

**IATA**

UN number: 1150    Class: 3    Packing group: II  
Proper shipping name: 1,2-Dichloroethylene

---

**15. REGULATORY INFORMATION****OSHA Hazards**

Flammable liquid

**SARA 302 Components**

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Fire Hazard

**Massachusetts Right To Know Components**

trans-Dichloroethylene

CAS-No.  
156-60-5Revision Date  
1993-04-24**Pennsylvania Right To Know Components**

trans-Dichloroethylene

CAS-No.  
156-60-5Revision Date  
1993-04-24**New Jersey Right To Know Components**

trans-Dichloroethylene

CAS-No.  
156-60-5Revision Date  
1993-04-24**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION****Further information**

Copyright 2012 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

---



# MATERIAL SAFETY DATA SHEET



**BP UNLEADED GASOLINES**

**MSDS No. 12632000 ANSI/ENGLISH**

---

## 1.0 CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

**PRODUCT NAME:** BP UNLEADED GASOLINES

**MANUFACTURER/SUPPLIER:**

BP Oil Company  
200 East Randolph Drive  
Chicago, Illinois 60601 U.S.A.

**EMERGENCY HEALTH INFORMATION:**

1 (800) 447-8735

**EMERGENCY SPILL INFORMATION:**

1 (800) 424-9300 CHEMTREC (USA)

**OTHER PRODUCT SAFETY  
INFORMATION:**

(630) 836-5441

---

## 2.0 COMPOSITION/INFORMATION ON INGREDIENTS

Component	CAS#	Range % by Wt.
Gasoline	8006-61-9	99.9-100
Benzene	71-43-2	0-3
Butane	106-97-8	4-6
Cyclohexane	110-82-7	0-1
Ethylbenzene	100-41-4	0-2
Heptane	142-82-5	6-8
Hexane	110-54-3	8-10
Pentane	109-66-0	9-11
Toluene	108-88-3	10-12
Trimethylbenzene	95-63-6	0-3
Xylene	1330-20-7	8-10

(See Section 8.0, "Exposure Controls/Personal Protection", for exposure guidelines)

---

### 3.0 HAZARDS IDENTIFICATION

**EMERGENCY OVERVIEW:** Danger! Extremely flammable. Inhalation of vapor/aerosol concentrations above the recommended exposure limits causes headaches, drowsiness, and nausea, and may lead to unconsciousness or death. Harmful if swallowed and/or aspirated into the lungs. Prolonged or repeated contact may cause irritation and/or dermatitis. Use as motor fuel only. Long-term exposure to vapors has caused cancer in laboratory animals.

#### **POTENTIAL HEALTH EFFECTS:**

**EYE CONTACT:** High concentrations of vapor/mist may cause eye discomfort.

**SKIN CONTACT:** Prolonged or repeated contact can defat the skin and lead to irritation and/or dermatitis.

**INHALATION:** Inhalation of vapor/aerosol concentrations above the recommended exposure limits causes headaches, drowsiness, and nausea, and may lead to unconsciousness or death. See "Toxicological Information" section (Section 11.0).

**INGESTION:** Harmful or fatal if liquid is aspirated into lungs. Ingestion causes gastrointestinal irritation and diarrhea. See "Toxicological Information" section (Section 11.0).

**HMIS CODE:** (Health:1) (Flammability:3) (Reactivity:0) CHRONIC HEALTH HAZARD.

**NFPA CODE:** (Health:1) (Flammability:3) (Instability:0)

---

### 4.0 FIRST AID MEASURES

**EYE:** Flush eyes with plenty of water. Get medical attention if irritation persists.

**SKIN:** Wash exposed skin with soap and water. Remove contaminated clothing, including shoes, and thoroughly clean and dry before reuse. Get medical attention if irritation develops.

**INHALATION:** If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. Get medical attention.

**INGESTION:** If swallowed, do NOT induce vomiting. Get immediate medical attention.

---

### 5.0 FIRE FIGHTING MEASURES

**FLASHPOINT:** -45°F

**UEL:** 7.6%

**LEL:** 1.3%

**AUTOIGNITION TEMPERATURE:** 495.0°F

**FLAMMABILITY CLASSIFICATION:** Extremely Flammable Liquid.

**EXTINGUISHING MEDIA:** Agents approved for Class B hazards (e.g., dry chemical, carbon dioxide, foam, steam) or water fog. Water may be ineffective but should be used to cool-fire exposed containers, structures and to protect personnel.

**UNUSUAL FIRE AND EXPLOSION HAZARDS:** Extremely flammable vapor/air mixtures form. Extinguishment of fire before source of vapor is shut off can create an explosive mixture in air. Product gives off vapors that are heavier than air which can travel considerable distances to a source of ignition and flashback. Runoff to sewer may cause a fire or explosion hazard.

**FIRE-FIGHTING EQUIPMENT:** Firefighters should wear full bunker gear, including a positive pressure self-contained breathing apparatus.

**PRECAUTIONS:** Keep away from sources of ignition (e.g., heat and open flames). Keep container closed. Use with adequate ventilation.

**HAZARDOUS COMBUSTION PRODUCTS:** Combustion of this product in an area without adequate ventilation may result in hazardous levels of combustion products (e.g., carbon monoxide, carbon dioxide) and inadequate oxygen levels.

---

## 6.0 ACCIDENTAL RELEASE MEASURES

Remove or shut off all sources of ignition. Wear respirator and spray with water to disperse vapors. Increase ventilation if possible. Prevent spreading by diking, ditching, or absorbing on inert materials. Keep out of sewers and waterways.

---

## 7.0 HANDLING AND STORAGE

**HANDLING:** Use with adequate ventilation. Keep away from ignition sources (e.g., heat, sparks, or open flames). Ground and bond containers when transferring materials. Wash thoroughly after handling.

**STORAGE:** Store in flammable liquids storage area. Keep container closed. Store away from heat, ignition sources, and open flame in accordance with applicable regulations.

**SPECIAL PRECAUTIONS:** Keep out of sewers and waterways. Avoid strong oxidizers. Report spills to appropriate authorities. USE AS MOTOR FUEL ONLY.

## 8.0 EXPOSURE CONTROLS / PERSONAL PROTECTION

**EYE:** None required; however, use of eye protection is good industrial practice.

**SKIN:** Avoid prolonged or repeated skin contact. Wear protective clothing and gloves if prolonged or repeated contact is likely.

**INHALATION:** Use with adequate ventilation. Avoid breathing vapor and/or mist. If ventilation is inadequate, use NIOSH certified respirator that will protect against organic vapor and dust/mist.

**ENGINEERING CONTROLS:** Control airborne concentrations below the exposure guidelines.

### EXPOSURE GUIDELINES:

Component	CAS#	Exposure Limits
Gasoline	8006-61-9	OSHA PEL: 300 ppm (1989); Not established. (1971) OSHA STEL: 500 ppm (1989); Not established. (1971) ACGIH TLV-TWA: 300 ppm ACGIH TLV-STEL: 500 ppm
Benzene	71-43-2	OSHA PEL: 1 ppm OSHA STEL: 5 ppm ACGIH TLV-TWA: 0.5 ppm (skin) ACGIH TLV-STEL: 2.5 ppm (skin) Mexico TWA: 10 ppm Mexico STEL: 25 ppm
Butane	106-97-8	OSHA PEL: 800 ppm (1989); Not established. (1971) ACGIH TLV-TWA: 800 ppm Mexico TWA: 800 ppm
Cyclohexane	110-82-7	OSHA PEL: 300 ppm (1989)(1971) ACGIH TLV-TWA: 300 ppm Mexico TWA: 300 ppm Mexico STEL: 375 ppm
Ethylbenzene	100-41-4	OSHA PEL: 100 ppm (1989)(1971) OSHA STEL: 125 ppm(1989); Not established. (1971) ACGIH TLV-TWA: 100 ppm ACGIH TLV-STEL: 125 ppm Mexico TWA: 100 ppm Mexico STEL: 125 ppm

Heptane	142-82-5	OSHA PEL: 400 ppm (1989); 500 ppm (1971) OSHA STEL: 500 ppm (1989); Not established. (1971) ACGIH TLV-TWA: 400 ppm ACGIH TLV-STEL: 500 ppm Mexico TWA: 400 ppm (skin) Mexico STEL: 500 ppm (skin)
Hexane	110-54-3	OSHA PEL: 50 ppm (1989); 500 ppm (1971) ACGIH TLV-TWA: 50 ppm (skin) Mexico TWA: 100 ppm
Pentane	109-66-0	OSHA PEL: 600 ppm (1989); 1000 ppm (1971) OSHA STEL: 750 ppm (1989); Not established. (1971) ACGIH TLV-TWA: 600 ppm Mexico TWA: 600 ppm Mexico STEL: 760 ppm
Toluene	108-88-3	OSHA PEL: 100 ppm (1989); 200 ppm (1971) OSHA STEL: 150 ppm (1989); Not established. (1971) OSHA Ceiling: 300 ppm (1971) ACGIH TLV-TWA: 50 ppm (skin) Mexico TWA: 100 ppm Mexico STEL: 150 ppm
Trimethylbenzene	95-63-6	OSHA PEL: 25 ppm (1989); Not established. (1971) ACGIH TLV-TWA: 25 ppm Mexico TWA: 25 ppm Mexico STEL: 35 ppm
Xylene	1330-20-7	OSHA PEL: 100 ppm (1989)(1971) OSHA STEL: 150 ppm (1989); Not established. (1971) ACGIH TLV-TWA: 100 ppm ACGIH TLV-STEL: 150 ppm Mexico TWA: 100 ppm (skin) Mexico STEL: 150 ppm (skin)

## 9.0 CHEMICAL AND PHYSICAL PROPERTIES

**APPEARANCE AND ODOR:** Clear. Liquid. Hydrocarbon odor.

**pH:** Not determined.

**VAPOR PRESSURE:** 7-15 lb RVP (ASTM D323)

**VAPOR DENSITY:** 3.0-4.0

**BOILING POINT:** 80.0-430.0°F (range)

**MELTING POINT:** Not determined.

**SOLUBILITY IN WATER:** Negligible, below 0.1%.

**SPECIFIC GRAVITY (WATER=1):** 0.75

---

## **10.0 STABILITY AND REACTIVITY**

**STABILITY:** Burning can be started easily.

**CONDITIONS TO AVOID:** Keep away from ignition sources (e.g. heat, sparks, and open flames).

**MATERIALS TO AVOID:** Avoid chlorine, fluorine, and other strong oxidizers.

**HAZARDOUS DECOMPOSITION:** None identified.

**HAZARDOUS POLYMERIZATION:** Will not occur.

---

## **11.0 TOXICOLOGICAL INFORMATION**

### **ACUTE TOXICITY DATA:**

**EYE IRRITATION:** This product had a primary eye irritation score (PEIS) of 0/110.0 (rabbit)

**SKIN IRRITATION:** This product had a primary skin irritation score (PDIS) of 1.1/8.0 (rabbit)

**DERMAL LD50:** greater than 5 ml/kg (rabbit).

**ORAL LD50:** 18.8 ml/kg (rat).

**INHALATION LC50:** 20.7 mg/l (rat)

**OTHER TOXICITY DATA:** Excess exposure to vapors may produce headaches, dizziness, nausea, drowsiness, irritation of eyes, nose and throat and central nervous system depression. Aspiration of this material into the lungs can cause chemical pneumonia and can be fatal. Aspiration into the lungs can occur while vomiting after ingestion of this product. Inhalation of unleaded gasoline vapors did not produce birth defects in laboratory animals. Ingestion of this material can cause gastrointestinal irritation and diarrhea.

In a long-term inhalation study of whole unleaded gasoline vapors, exposure-related kidney damage and kidney tumors were observed in male rats. Similar kidney effects were not seen in female rats or in mice. At the highest exposure level (2056 ppm), female mice had an increased incidence of liver tumors. Results from subsequent scientific studies have shown that a broad variety of chemicals cause these kidney effects only in the male rat. Further studies have discovered the means by which

the physiology of the male rat uniquely predispose it to these effects. Consequently, the Risk Assessment Forum of the Environmental Protection Agency has recognized that these responses are not predictive of a human health hazard. The liver tumors that were increased in the high-dose female mice are likewise of questionable significance because of their high spontaneous occurrence even without chemical exposure and because the rate of their occurrence is accelerated by a broad spectrum of chemicals not commonly considered to be carcinogens (e.g., phenobarbital). Thus, the significance of the mouse liver tumor response in terms of human health is questionable.

Gasoline is a complex mixture of hydrocarbons and contains benzene (typically no more than 2 volume%), toluene, and xylene. Chronic exposure to high levels of benzene has been shown to cause cancer (leukemia) in humans and other adverse blood effects (anemia). Benzene is considered a human carcinogen by IARC, NTP and OSHA. Over exposure to xylene and toluene can cause irritation to the upper respiratory tract, headache and narcosis. Some liver damage and lung inflammation were seen in chronic studies on xylene in guinea pigs but not in rats.

Solvent "sniffing" (abuse) or intentional overexposure to vapors can produce serious central nervous system effects, including unconsciousness, and possibly death.

---

## **12.0 ECOLOGICAL INFORMATION**

Ecological testing has not been conducted on this material by BP Amoco.

---

## **13.0 DISPOSAL INFORMATION**

Residues and spilled material are hazardous waste due to ignitability. Disposal must be in accordance with applicable federal, state, or local regulations. Enclosed-controlled incineration is recommended unless directed otherwise by applicable ordinances.

The container for this product can present explosion or fire hazards, even when emptied! To avoid risk of injury, do not cut, puncture, or weld on or near this container. Since the emptied containers retain product residue, follow label warnings even after container is emptied.

---

## **14.0 TRANSPORTATION INFORMATION**

### **U.S. DEPT OF TRANSPORTATION**

<b>Shipping Name</b>	Gasoline
<b>Hazard Class</b>	3
<b>Identification Number</b>	UN1203
<b>Packing Group</b>	II

## **INTERNATIONAL INFORMATION:**

### **Sea (IMO/IMDG)**

**Shipping Name** Gasoline

**Class** 3.1

**Packing Group** II

**UN Number** UN1203

### **Air (ICAO/IATA)**

**Shipping Name** Gasoline , UN1203

**Class** 3

**Packing Group** II

### **European Road/Rail (ADR/RID)**

**Shipping Name** Not determined.

### **Canadian Transportation of Dangerous Goods**

**Shipping Name** Gasoline

**Hazard Class** 3

**UN Number** UN1203

**Packing Group** II

---

## **15.0 REGULATORY INFORMATION**

**CERCLA SECTIONS 102a/103 HAZARDOUS SUBSTANCES (40 CFR Part 302.4):** This product is exempt from the CERCLA reporting requirements under 40 CFR Part 302.4. However, if spilled into waters of the United States, it may be reportable under 33 CFR Part 153 if it produces a sheen.

**SARA TITLE III SECTION 302 EXTREMELY HAZARDOUS SUBSTANCES (40 CFR Part 355):** This product is not regulated under Section 302 of SARA and 40 CFR Part 355.

**SARA TITLE III SECTIONS 311/312 HAZARDOUS CATEGORIZATION (40 CFR Part 370):** This product is defined as hazardous by OSHA under 29 CFR Part 1910.1200(d). Hazardous categories for this product are: Acute = yes; Chronic = yes; Fire = yes; Pressure = no; Reactive = no.

**SARA TITLE III SECTION 313 (40 CFR Part 372):** This product contains the following substance(s), which is on the Toxic Chemicals List in 40 CFR Part 372:



Component/CAS Number	Weight Percent
Benzene 71-43-2	3
Trimethylbenzene 95-63-6	3
Cyclohexane 110-82-7	1
Ethylbenzene 100-41-4	2
Xylene 1330-20-7	10
Hexane 110-54-3	10
Toluene 108-88-3	12

**U.S. INVENTORY (TSCA):** Listed on inventory.

**OSHA HAZARD COMMUNICATION STANDARD:** Flammable liquid. Irritant. Contains components listed by ACGIH. Contains components listed by OSHA. Contains a carcinogenic component.

**WHMIS Controlled Product Classification:** B2, D2A, D2B.

**EC INVENTORY (EINECS/ELINCS):** Not determined.

**JAPAN INVENTORY (MITI):** Not determined.

**AUSTRALIA INVENTORY (AICS):** Not determined.

**KOREA INVENTORY (ECL):** Not determined.

**CANADA INVENTORY (DSL):** Not determined.

**PHILIPPINE INVENTORY (PICCS):** Not determined.

## 16.0 OTHER INFORMATION

This material contains an ingredient/ingredients present on the following State Right-To-Know lists:

-Florida- -Massachusetts- -New Jersey- -Pennsylvania- -California- -Minnesota-

This product contains an ingredient/ingredients known to the state of California to cause cancer and/or reproductive toxicity.

**Prepared by:**


Environment, Health and Safety Department

**Issued:** July 16, 1999

---

*This Material Safety Data Sheet conforms to the requirements of ANSI Z400.1.*

*NOTICE: The information presented herein is based on data considered to be accurate as of the date of preparation of this Material Safety Data Sheet. However, no warranty or representation, express or implied, is made as to the accuracy or completeness of the foregoing data and safety information, nor is any authorization given or implied to practice any patented invention without a license. In addition, no responsibility can be assumed by vendor for any damage or injury resulting from abnormal use, from any failure to adhere to recommended practices, or from any hazards inherent in the nature of the product.*



Health	2
Fire	3
Reactivity	0
Personal Protection	H

## Material Safety Data Sheet

### Xylenes MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Xylenes

**Catalog Codes:** SLX1075, SLX1129, SLX1042, SLX1096

**CAS#:** 1330-20-7

**RTECS:** ZE2100000

**TSCA:** TSCA 8(b) inventory: Xylenes

**CI#:** Not available.

**Synonym:** Xylenes; Dimethylbenzene; xylol; methyltoluene

**Chemical Name:** Xylenes (o-, m-, p- isomers)

**Chemical Formula:** C<sub>6</sub>H<sub>4</sub>(CH<sub>3</sub>)<sub>2</sub>

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Xylenes	1330-20-7	100

**Toxicological Data on Ingredients:** Xylenes: ORAL (LD50): Acute: 4300 mg/kg [Rat]. 2119 mg/kg [Mouse]. DERMAL (LD50): Acute: >1700 mg/kg [Rabbit].

#### Section 3: Hazards Identification

**Potential Acute Health Effects:** Hazardous in case of skin contact (irritant, permeator), of eye contact (irritant), of ingestion, of inhalation.

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: 3 (Not classifiable for human.) by IARC. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to blood, kidneys, liver, mucous membranes, bone marrow, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage.

#### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention.

**Skin Contact:**

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if symptoms appear.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** 464°C (867.2°F)

**Flash Points:** CLOSED CUP: 24°C (75.2°F). (Tagliabue.) OPEN CUP: 37.8°C (100°F).

**Flammable Limits:** LOWER: 1% UPPER: 7%

**Products of Combustion:** These products are carbon oxides (CO, CO<sub>2</sub>).

**Fire Hazards in Presence of Various Substances:**

Highly flammable in presence of open flames and sparks, of heat. Non-flammable in presence of shocks.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Slightly explosive in presence of open flames and sparks, of heat.

**Fire Fighting Media and Instructions:**

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:** Vapors may travel to source of ignition and flash back.

**Special Remarks on Explosion Hazards:**

Vapors may form explosive mixtures with air. Containers may explode when heated. May polymerize explosively when heated. An attempt to chlorinate xylene with 1,3-Dichloro-5,5-dimethyl-2,4-imidazolidindione (dichlorohydrantoin) caused a violent explosion

## Section 6: Accidental Release Measures

**Small Spill:** Absorb with an inert material and put the spilled material in an appropriate waste disposal.

**Large Spill:**

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined

areas; dike if needed. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

### Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapor/spray. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, acids.

### Storage:

Store in a segregated and approved area. Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Avoid all possible sources of ignition (spark or flame).

## Section 8: Exposure Controls/Personal Protection

### Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

### Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

### Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

### Exposure Limits:

TWA: 100 (ppm) [Canada] TWA: 435 (mg/m<sup>3</sup>) [Canada] TWA: 434 STEL: 651 (mg/m<sup>3</sup>) from ACGIH (TLV) [United States]  
TWA: 100 STEL: 150 (ppm) from ACGIH (TLV) [United States] Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Liquid.

**Odor:** Sweetish.

**Taste:** Not available.

**Molecular Weight:** 106.17 g/mole

**Color:** Colorless. Clear

**pH (1% soln/water):** Not available.

**Boiling Point:** 138.5°C (281.3°F)

**Melting Point:** -47.4°C (-53.3°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 0.864 (Water = 1)

**Vapor Pressure:** 0.9 kPa (@ 20°C)

**Vapor Density:** 3.7 (Air = 1)

**Volatility:** Not available.

**Odor Threshold:** 1 ppm

**Water/Oil Dist. Coeff.:** The product is more soluble in oil;  $\log(\text{oil/water}) = 3.1$

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:**

Insoluble in cold water, hot water. Miscible with absolute alcohol, ether, and many other organic liquids.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Heat, ignition sources, incompatibles

**Incompatibility with various substances:** Reactive with oxidizing agents, acids.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:** Store away from acetic acid, nitric acid, chlorine, bromine, and fluorine.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Absorbed through skin. Dermal contact. Eye contact. Inhalation.

**Toxicity to Animals:**

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 2119 mg/kg [Mouse]. Acute dermal toxicity (LD50): >1700 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 5000 4 hours [Rat].

**Chronic Effects on Humans:**

CARCINOGENIC EFFECTS: 3 (Not classifiable for human.) by IARC. May cause damage to the following organs: blood, kidneys, liver, mucous membranes, bone marrow, central nervous system (CNS).

**Other Toxic Effects on Humans:** Hazardous in case of skin contact (irritant, permeator), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:**

Lowest Lethal Dose: LDL [Human] - Route: Oral; Dose: 50 mg/kg LCL [Man] - Route: Oral; Dose: 10000 ppm/6H

**Special Remarks on Chronic Effects on Humans:**

Detected in maternal milk in human. Passes through the placental barrier in animal. Embryotoxic and/or foetotoxic in animal. May cause adverse reproductive effects (male and female fertility (spontaneous abortion and fetotoxicity)) and birth defects based animal data.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects: Skin: Causes skin irritation. Can be absorbed through skin. Eyes: Causes eye irritation. Inhalation: Vapor causes respiratory tract and mucous membrane irritation. May affect central nervous system and behavior (General anesthetic/CNS depressant with effects including headache, weakness, memory loss, irritability, dizziness, giddiness, loss of coordination and judgement, respiratory depression/arrest or difficulty breathing, loss of appetite, nausea, vomiting, shivering, and possible coma and death). May also affects blood, sense organs, liver, and peripheral nerves. Ingestion: May cause gastrointestinal irritation including abdominal pain, vomiting, and nausea. May also affect liver and urinary system/kidneys. May cause effects similar to those of acute inhalation. Chronic Potential Health Effects: Chronic inhalation may affect the urinary system (kidneys) blood (anemia), bone marrow (hyperplasia of bone marrow) brain/behavior/Central Nervous system. Chronic inhalation may also cause mucosal bleeding. Chronic ingestion may affect the liver and metabolism (loss of appetite) and may affect urinary system (kidney damage)

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are less toxic than the product itself.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

## Section 14: Transport Information

**DOT Classification:** CLASS 3: Flammable liquid.

**Identification :** Xylenes UNNA: 1307 PG: III

**Special Provisions for Transport:** Not available.

## Section 15: Other Regulatory Information

**Federal and State Regulations:**

Connecticut hazardous material survey.: Xylenes Illinois chemical safety act: Xylenes New York acutely hazardous substances: Xylenes Rhode Island RTK hazardous substances: Xylenes Pennsylvania RTK: Xylenes Minnesota: Xylenes Michigan critical material: Xylenes Massachusetts RTK: Xylenes Massachusetts spill list: Xylenes New Jersey: Xylenes New Jersey spill list: Xylenes Louisiana spill reporting: Xylenes California Director's List of Hazardous Substances: Xylenes TSCA 8(b) inventory: Xylenes SARA 302/304/311/312 hazardous chemicals: Xylenes SARA 313 toxic chemical notification and release reporting: Xylenes CERCLA: Hazardous substances.: Xylenes: 100 lbs. (45.36 kg)

**Other Regulations:**

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):**

CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F). CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

**DSCL (EEC):**

R10- Flammable. R21- Harmful in contact with skin. R36/38- Irritating to eyes and skin. S2- Keep out of the reach of children. S36/37- Wear suitable protective clothing and gloves. S46- If swallowed, seek medical advice immediately and show this container or label.

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 3

**Reactivity:** 0

**Personal Protection:** h

**National Fire Protection Association (U.S.A.):**

**Health:** 2

**Flammability:** 3

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

**Section 16: Other Information**

**References:** Not available.


**Other Special Considerations:** Not available.

**Created:** 10/11/2005 12:54 PM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*





Health	1
Fire	1
Reactivity	1
Personal Protection	E

## Material Safety Data Sheet

### Zinc Metal MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Zinc Metal

**Catalog Codes:** SLZ1054, SLZ1159, SLZ1267, SLZ1099, SLZ1204

**CAS#:** 7440-66-6

**RTECS:** ZG8600000

**TSCA:** TSCA 8(b) inventory: Zinc Metal

**CI#:** Not applicable.

**Synonym:** Zinc Metal Sheets; Zinc Metal Shot; Zinc Metal Strips

**Chemical Name:** Zinc Metal

**Chemical Formula:** Zn

#### Contact Information:

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**  
1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

##### Composition:

Name	CAS #	% by Weight
Zinc Metal	7440-66-6	100

**Toxicological Data on Ingredients:** Zinc Metal LD50: Not available. LC50: Not available.

#### Section 3: Hazards Identification

**Potential Acute Health Effects:** Slightly hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation.

##### Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. Repeated or prolonged exposure is not known to aggravate medical condition.

#### Section 4: First Aid Measures

##### Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

**Skin Contact:** Wash with soap and water. Cover the irritated skin with an emollient. Get medical attention if irritation develops.

**Serious Skin Contact:** Not available.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:** Not available.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** 480°C (896°F)

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Not available.

**Fire Hazards in Presence of Various Substances:**

Slightly flammable to flammable in presence of open flames and sparks, of heat, of oxidizing materials, of acids, of alkalis, of moisture. Non-flammable in presence of shocks.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

Flammable solid. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:**

Zinc + NaOH causes ignition. Oxidation of zinc by potassium proceeds with incandescence. Residues from zinc dust /acetic acid reduction operations may ignite after long delay if discarded into waste bins with paper. Incandescent reaction when Zinc and Arsenic or Tellurium, or Selenium are combined. When hydrazine mononitrate is heated in contact with zinc, a flaming decomposition occurs at temperatures a little above its melting point. Contact with acids and alkali hydroxides (sodium hydroxide, potassium hydroxide, calcium hydroxide, etc.) results in evolution of hydrogen with sufficient heat of reaction to ignite the hydrogen gas. Zinc foil ignites if traces of moisture are present. It is water reactive and produces flammable gases on contact with water. It may ignite on contact with water or moist air.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:**

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

**Large Spill:**

Flammable solid that, in contact with water, emits flammable gases. Stop leak if without risk. Do not get water inside container. Do not touch spilled material. Cover with dry earth, sand or other non-combustible material. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system.

## Section 7: Handling and Storage

### Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not breathe dust. Keep away from incompatibles such as oxidizing agents, acids, alkalis, moisture.

### Storage:

Keep container tightly closed. Keep container in a cool, well-ventilated area. Keep from any possible contact with water. Do not allow water to get into container because of violent reaction.

## Section 8: Exposure Controls/Personal Protection

### Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

### Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:** Not available.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Lustrous solid. Metal solid.)

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 65.39 g/mole

**Color:** Bluish-grey

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 907°C (1664.6°F)

**Melting Point:** 419°C (786.2°F)

**Critical Temperature:** Not available.

**Specific Gravity:** Not available.

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Insoluble in cold water, hot water, methanol, diethyl ether, n-octanol, acetone.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Excess heat, incompatible materials, moisture

**Incompatibility with various substances:**

Reactive with oxidizing agents, acids, alkalis. Slightly reactive to reactive with moisture. The product may react violently with water to emit flammable but non toxic gases.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:**

Incompatible with acids, halogenated hydrocarbons,  $\text{NH}_4\text{NO}_3$ , barium oxide,  $\text{Ba}(\text{NO}_3)_2$ , Cadmium,  $\text{CS}_2$ , chlorates,  $\text{Cl}_2$ ,  $\text{CrO}_3$ ,  $\text{F}_2$ , Hydroxylamine,  $\text{Pb}(\text{N}_3)_2$ ,  $\text{MnCl}_2$ ,  $\text{HNO}_3$ , performic acid,  $\text{KClO}_3$ ,  $\text{KNO}_3$ ,  $\text{N}_2\text{O}_2$ , Selenium,  $\text{NaClO}_3$ ,  $\text{Na}_2\text{O}_2$ , Sulfur, Te, water,  $(\text{NH}_4)_2\text{S}$ ,  $\text{As}_2\text{O}_3$ ,  $\text{CS}_2$ ,  $\text{CaCl}_2$ , chlorinated rubber, catalytic metals, halocarbons, o-nitroanisole, nitrobenzene, nonmetals, oxidants, paint primer base, pentacarbonoyliron, transition metal halides, seleninyl bromide,  $\text{HCl}$ ,  $\text{H}_2\text{SO}_4$ ,  $(\text{Mg} + \text{Ba}(\text{NO}_3)_2 + \text{BaO}_2)$ , (ethyl acetoacetate +tribromoneopentyl alcohol. Contact with Alkali Hydroxides(Sodium Hydroxide, Potassium Hydroxide, Calcium Hydroxide, etc) results in evolution of hydrogen. Ammonium nitrate + zinc + water causes a violent reaction with evolution of steam and zinc oxide. May react with water.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available. LC50: Not available.

**Chronic Effects on Humans:** Not available.

**Other Toxic Effects on Humans:** Slightly hazardous in case of skin contact (irritant), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Not available.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects: Skin: May cause skin irritation. Dermal exposure to zinc may produce leg pains, fatigue, anorexia and weight loss. Eyes: May cause eye irritation. Ingestion: May be harmful if swallowed. May cause digestive tract irritation with tightness in throat, nausea, vomiting, diarrhea, loss of appetite, malaise, abdominal pain. fever, and chills. May affect behavior/central nervous system and autonomic nervous system with ataxia, lethargy, staggering gait, mild derrangement in cerebellar function, lightheadness, dizziness, irritability, muscular stiffness, and pain. May also affect blood. Inhalation: Inhalation of zinc dust or fumes may cause respiratory tract and mucous membrane irritation with cough and chest pain. It can also cause "metal fume fever", a flu-like condition characterized appearance of chills, headached fever, maliase, fatigue, sweating, extreme thirst, aches in the legs and chest, and difficulty in breathing. A sweet taste may also be be present in metal fume fever, as well as a dry throat, aches, nausea, and vomiting, and pale grey cyanosis. The toxicological properties of this substance have not been fully investisgated.

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** Not available.

**Special Remarks on the Products of Biodegradation:** Not available.

### Section 13: Disposal Considerations

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

### Section 14: Transport Information

**DOT Classification:** Not a DOT controlled material (United States).

**Identification:** Not applicable.

**Special Provisions for Transport:** Not applicable.

### Section 15: Other Regulatory Information

**Federal and State Regulations:**

New York release reporting list: Zinc Metal Rhode Island RTK hazardous substances: Zinc Metal Pennsylvania RTK: Zinc Metal Florida: Zinc Metal Michigan critical material: Zinc Metal Massachusetts RTK: Zinc Metal New Jersey: Zinc Metal California Director's List of Hazardous Substances: Zinc Metal TSCA 8(b) inventory: Zinc Metal TSCA 12(b) one time export: Zinc Metal SARA 313 toxic chemical notification and release reporting: Zinc Metal CERCLA: Hazardous substances.: Zinc Metal: 1000 lbs. (453.6 kg)

**Other Regulations:** EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):** Not Available

**DSCL (EEC):**

R15- Contact with water liberates extremely flammable gases. R17- Spontaneously flammable in air. S7/8- Keep container tightly closed and dry.

**HMIS (U.S.A.):**

**Health Hazard:** 1

**Fire Hazard:** 1

**Reactivity:** 1

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 0

**Flammability:** 1

**Reactivity:** 1

**Specific hazard:**

**Protective Equipment:**

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Safety glasses.

### Section 16: Other Information

**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 12:18 AM

**Last Updated:** 06/09/2012 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*

## **ATTACHMENT D**

### **Standard Safe Work Practices**

- 1) Eating, drinking, chewing tobacco, smoking and carrying matches or lighters is prohibited in a contaminated or potentially contaminated area or where the possibility for the transfer of contamination exists.
  - 2) Avoid contact with potentially contaminated substances. Do not walk through puddles, pools, mud, etc. Avoid, whenever possible, kneeling on the ground, leaning or sitting on equipment or ground. Do not place monitoring equipment on potentially contaminated surfaces (i.e., ground, etc.).
  - 3) All field crew members should make use of their senses to alert them to potentially dangerous situations in which they should not become involved; i.e., presence of strong and irritating or nauseating odors.
  - 4) Prevent, to the extent possible, spills. In the event that a spillage occurs, contain liquid if possible.
  - 5) Field crew members shall be familiar with the physical characteristics of investigations, including:
    - Wind direction
    - Accessibility to associates, equipment, vehicles
    - Communication
    - Hot zone (areas of known or suspected contamination)
    - Site access
    - Nearest water sources
  - 6) All wastes generated during activities on-site should be disposed of as directed by the project manager or his on-site representative.
  - 7) Protective equipment as specified in the section on personnel protection will be utilized by workers during the initial site reconnaissance, and other activities.
- Employees shall follow procedures to avoid at-risk behaviors that could result in an incident.

## **APPENDIX C**

### **Quality Assurance Project Plan**



## **APPENDIX C**

### **Quality Assurance Project Plan**

---

**Quality Assurance Project Plan**

**For**

**714 East 241<sup>st</sup> Street**  
**Block 5087, Lot 1**  
**(Former Lots 1, 3, 6, 59, 62, and 65)**  
**Bronx, NY**

*Prepared For:*

**Enclave on 241 Street LLC**  
**2975 Westchester Avenue, Suite 100**  
**Purchase, New York 10577**

**Prepared By:**

**Langan Engineering, Environmental, Surveying**  
**and Landscape Architecture, D.P.C.**  
**555 Long Wharf Drive**  
**New Haven, Connecticut 06511**



---

**Jamie P. Barr**

**6 February 2015**  
**Langan Project No. 140115301**

***LANGAN***

## TABLE OF CONTENTS

	<u>PAGE</u>
<b>1.0 PROJECT DESCRIPTION .....</b>	<b>1</b>
1.1 Introduction .....	1
1.2 Project Objectives.....	1
1.3 Scope of Work.....	1
1.4 Data Quality Objectives and Processes .....	1
<b>2.0 PROJECT ORGANIZATION .....</b>	<b>3</b>
<b>3.0 QUALITY ASSURANCE/QUALITY CONTROL OBJECTIVES FOR MEASUREMENT OF DATA .....</b>	<b>4</b>
3.1 Introduction .....	4
3.2 Precision .....	4
3.3 Accuracy .....	7
3.4 Representativeness .....	8
3.5 Completeness .....	8
3.6 Comparability .....	9
<b>4.0 SAMPLING PROGRAM.....</b>	<b>10</b>
4.1 Introduction .....	10
4.2 Sample Nomenclature .....	10
4.3 Sample Container Preparation and Sample Preservation.....	10
4.4 Sample Holding Times.....	11
4.5 Field QC Samples .....	11
<b>5.0 SAMPLE TRACKING AND CUSTODY.....</b>	<b>14</b>
5.1 Introduction .....	14
5.2 Field Sample Custody .....	14
5.3 Laboratory Sample Custody.....	17
<b>6.0 CALIBRATION PROCEDURES.....</b>	<b>19</b>
6.1 Field Instruments.....	19
6.2 Laboratory Instruments .....	19
<b>7.0 ANALYTICAL PROCEDURES.....</b>	<b>20</b>
7.1 Introduction .....	20
<b>8.0 DATA REDUCTION, VALIDATION, AND REPORTING.....</b>	<b>28</b>
8.1 Introduction .....	28
8.2 Data Reduction .....	28
8.3 Data Validation.....	29

---

<b>9.0</b>	<b>INTERNAL QUALITY CONTROL CHECKS AND FREQUENCY .....</b>	<b>31</b>
9.1	Quality Assurance Batching .....	31
9.2	Calibration Standards and Surrogates .....	31
9.3	Organic Blanks and Matrix Spike .....	31
9.4	Trip and Field Blanks.....	31
<b>10.0</b>	<b>QUALITY ASSURANCE PERFORMANCE AUDITS AND SYSTEM AUDITS</b>	
	<b>32</b>	
10.1	Introduction .....	32
10.2	System Audits .....	32
10.3	Performance Audits .....	32
10.4	Formal Audits .....	32
<b>11.0</b>	<b>PREVENTIVE MAINTENANCE PROCEDURES AND SCHEDULES....</b>	<b>34</b>
11.1	Preventive Maintenance Procedures .....	34
11.2	Schedules .....	34
11.3	Records .....	34
<b>12.0</b>	<b>CORRECTIVE ACTION .....</b>	<b>35</b>
12.1	Introduction .....	35
12.2	Procedure Description .....	35
<b>13.0</b>	<b>REFERENCES .....</b>	<b>38</b>

## FIGURES

Figure 5.1	Sample Custody .....	16
Figure 5.2	Chain-of-Custody Record.....	17
Figure 12.1	Corrective Action Request.....	37

## TABLES

Table 3.1	Quality Control Limits for Water Samples .....	6
Table 3.2	Quality Control Limits for Soil Samples .....	7
Table 4.1	Water Sample Containerization, Preservation and Holding Times .....	13
Table 4.2	Soil Sample Containerization, Preservation and Holding Times .....	14
Table 4.3	Soil Vapor Sample Containerization, Preservation and Holding Times .....	14
Table 7.1	Project Quantitation Limits .....	21

## ATTACHMENTS

Attachment A:	Sample Nomenclature
Attachment B:	Resumes

## **1.0 PROJECT DESCRIPTION**

### **1.1 INTRODUCTION**

This Quality Assurance Project Plan (QAPP) is for the 24,060-square-foot irregularly shaped lot at 714 East 241st Street in Bronx, New York (the Site). The Site is subject to New York State Department of Environmental Conservation (NYSDEC) review under the Spills Program (Spill No. 1214956, reported on 25 January 2013) and the Volunteer applied for acceptance into the New York State Brownfield Cleanup Program (BCP) on 4 February 2015 (BCP Site No. C203077). Additional Site information and data collected previously by Langan and others is provided in the Remedial Investigation Work Plan (RIWP).

This QAPP specifies analytical methods to be used to ensure that data from the proposed Remedial Investigation (RI) at the Site are precise, accurate, representative, comparable, and complete.

### **1.2 PROJECT OBJECTIVES**

The objective of this RI is to evaluate the nature and extent of environmental impacts associated with historic site activities as identified during previous environmental investigations.

### **1.3 SCOPE OF WORK**

The specific scope of work for this investigation is described in detail in the Remedial Investigation Work Plan dated 6 February 2015. Samples will be collected from soil borings, groundwater monitoring wells, and soil vapor points in accordance with sampling protocol. The project Site and proposed sample location plan and sample rationale table are included in Appendix A. These samples will be analyzed using the USEPA SW-846 "Test Methods for Evaluating Solid Waste," November 1986, 3<sup>rd</sup> edition (and subsequent updates).

### **1.4 DATA QUALITY OBJECTIVES AND PROCESSES**

Data quality objectives (DQOs) are qualitative and quantitative statements, which specify the quality of data required to support the investigation of the Site. DQOs focus on the identification of the end use of the data to be collected. The project DQOs will be achieved utilizing the definitive data category, as outlined in Guidance for the Data Quality Objectives Process, EPA QA/G-4 (September 1994). All sample analyses will provide definitive data, which are generated using rigorous analytical methods, such as the reference methods approved by the United States Environmental Protection Agency (USEPA). The purpose of this investigation is to determine the nature and extent of contamination at the Site. Within the context of the purpose stated above, the project DQOs for data collected during this investigation are:

- To assess the nature/extent of contamination in surface and subsurface soil/fill and groundwater;

- To maintain the highest possible scientific/professional standards for each procedure; and,
- To develop enough information to assess if the levels of contaminants identified in the media sampled are hazardous or non-hazardous.

The quality assurance and quality control objectives for all measurement data include:

- **Precision** – an expression of the reproducibility of measurements of the same parameter under a given set of conditions. Field sampling precision will be determined by analyzing coded duplicate samples and analytical precision will be determined by analyzing internal QC duplicates and matrix spike duplicates.
- **Accuracy** – a measure of the degree of agreement of a measured value with the true or expected value of the quantity of concern. Sampling accuracy will be determined through the assessment of the analytical results of field blanks and trip blanks for each sample set. Analytical accuracy will be assessed by examining the percent recoveries of surrogate compounds that are added to each sample (organic analyses only), and the percent recoveries of matrix spike compounds added to selected samples and laboratory blanks.
- **Representativeness** – expresses the degree to which sample data accurately and precisely represent a characteristic of a population, parameter variations at a sampling point, or an environmental condition. Representativeness will be determined by assessing a number of investigation procedures, including chain of custody, decontamination, and analysis of field blanks and trip blanks.
- **Completeness** – the percentage of measurements made which are judged to be valid. Completeness will be assessed through data validation. The QC objective for completeness is generation of valid data for at least 90 percent of the analyses requested.
- **Comparability** – expresses the degree of confidence with which one data set can be compared to another. The comparability of all data collected for this project will be ensured using several procedures, including standard methods for sampling and analysis, instrument calibrations, using standard reporting units and reporting formats, and data validation.

Each of the above objectives are discussed in detail in Section 3.

---

## **2.0 PROJECT ORGANIZATION**

The execution of the RIWP will be overseen by Langan on behalf of Enclave on 241 Street LLC. Langan will arrange for the drilling, monitoring well and soil vapor point installations, and provide on-site field representatives to perform the soil logging and soil, groundwater, and soil vapor sampling. Langan will also arrange for surveying of monitoring wells and perform the data analysis and reporting tasks.

The analytical services will be performed by York Analytical Laboratories, Inc. of Stratford, Conn., NYSDOH ELAP certification number 10854. Data validation services will be performed by Emily Strake; resume attached (Attachment A).

Key contacts for this project are as follows:

Enclave on 241 Street LLC	Mr. Michael Goldberg Telephone: (914) 285-1430
Langan Project Director:	Mr. Jamie P. Barr, L.E.P. Telephone: (203) 784-3034
Langan Project Manager:	Mr. Ryan Wohlstrom Telephone: (203) 784-3069
Langan Quality Assurance Officer (QAO):	Mr. David Granucci Telephone: (203) 784-3052
Program Quality Assurance Monitor:	Mr. Justin Hall Telephone: (203) 784-3049
Data Validator:	Ms. Emily Strake Telephone: (215) 491-6526
Laboratory Representatives:	York Analytical Laboratories, Inc. Phil Murphy Telephone: (203) 598-1371

---

### **3.0 QUALITY ASSURANCE/QUALITY CONTROL OBJECTIVES FOR MEASUREMENT OF DATA**

#### **3.1 INTRODUCTION**

The quality assurance and quality control objectives for all measurement data include precision, accuracy, representativeness, completeness, and comparability. These objectives are defined in following subsections. They are formulated to meet the requirements of the United States Environmental Protection Agency (USEPA) SW-846. The analytical methods and their Contract Required Quantification Limits (CRQLs) are given in Section 7.

#### **3.2 PRECISION**

Precision is an expression of the reproducibility of measurements of the same parameter under a given set of conditions. Specifically, it is a quantitative measurement of the variability of a group of measurements compared to their average value (USEPA, 1987). Precision is usually stated in terms of standard deviation, but other estimates such as the coefficient of variation (relative standard deviation), range (maximum value minus minimum value), relative range, and relative percent difference (RPD) are common.

For this project, field sampling precision will be determined by analyzing coded duplicate samples (labeled so that the laboratory does not recognize them as duplicates) for the same parameters, and then, during data validation (Section 8), calculating the RPD for duplicate sample results.

Analytical precision will be determined by the laboratory by calculating the RPD for the results of the analysis of internal QC duplicates and matrix spike duplicates. The formula for calculating RPD is as follows:

$$RPD = \frac{|V1 - V2|}{(V1 + V2)/2} \times 100$$

where:

- RPD = Relative Percent Difference.
- V1, V2 = The two values to be compared.
- $|V1 - V2|$  = The absolute value of the difference between the two values.
- $(V1 + V2)/2$  = The average of the two values.

The data quality objectives for analytical precision, calculated as the RPD between duplicate analyses, are presented in Tables 3.1 and 3.2.

---



**TABLE 3.1**  
**QUALITY CONTROL LIMITS FOR WATER SAMPLES**

Laboratory Accuracy and Precision							
Analytical Parameters	Analytical Method (a)	Matrix Spike (MS) Compounds	MS/MSD (b) % Recovery	MS/MSD RPD I	LCS (d) % Recovery	Surrogate Compounds	Surrogate % Recovery
VOCs (e)	8260	1,1-Dichloroethane	61-145	-	NA	Toluene-d8	88-110
		Trichloroethene	71-120	-	NA	Bromofluorobenzene	86-115
		Benzene	76-127	-	NA	1,2-Dichloroethane-d4	76-114
		Toluene	76-125	-	NA		
		Chlorobenzene	75-130	-	NA		
SVOCs (f)	8270	Phenol	12-110	-	NA	Nitrobenzene-d5	35-114
		2-Chlorophenol	27-123	-	NA	2-Fluorobiphenyl	43-116
		1,4-Dichlorobenzene	36-97	-	NA	Terphenyl-d14	33-141
		N-Nitroso-di-n-propylamine	41-116	-	NA	Phenol-d5	10-110
		1,2,4-Trichlorobenzene	39-98	-	NA	2-Fluorophenol	21-110
		4-Chloro-3-methylphenol	23-97	-	NA	2,4,6-Tribromophenol	10-123
		Acenaphthene	46-118	-	NA	2-Chlorophenol-d4	33-110 (g)
		4-Nitrophenol	10-80	-	NA	1,2-Dichlorobenzene-d4	16-110 (g)
		2,4-Dinitrotoluene	24-96	-	NA		
		Pentachlorophenol	9-103	-	NA		
		Pyrene	26-127	-	NA		
Inorganics (i)	6010,7470/7471 ,7841,9010, OIA-1677	Inorganic Analyte	75-125 (j)	- (k)	80-120	NA	NA

(a) Analytical Methods: USEPA SW-846, 3rd edition, Revision 1, November 1990; any subsequent revisions shall supersede this information

(b) Matrix Spike/Matrix Spike Duplicate

(c) Relative Percent Difference

(d) Laboratory Control Sample

(e) Target Compound List Volatile Organic Compounds plus library search

(f) Target Compound List Semivolatile Organic Compounds plus library search

(g) Limits are advisory only

(h) Polychlorinated Biphenyls

(i) Target Analyte List Inorganics (metals)

(j) Matrix spike only

(k) Laboratory duplicate RPD

NA - Not Applicable

**TABLE 3.2**  
**QUALITY CONTROL LIMITS FOR SOIL SAMPLES**

Laboratory Accuracy and Precision							
Analytical Parameter	Analytical Method (a)	Matrix Spike (MS) Compounds	MS/MSD (b) % Recovery	MS/MSD RPD (c)	LCS (d) % Recovery	Surrogate Compounds	Surrogate % Recovery
VOCs (e)	8260	1,1-Dichloroethane	59-172	22	NA	Toluene-d8	84-138
		Trichloroethene	62-137	24	NA	Bromofluorobenzene	59-113
		Benzene	66-142	21	NA	1,2-Dichloroethane-d4	70-121
		Toluene	59-139	21	NA		
		Chlorobenzene	60-133	21	NA		
SVOCs (f)	8270	Phenol	26-90	35	NA	Nitrobenzene-d5	23-120
		2-Chlorophenol	25-102	50	NA	2-Fluorobiphenyl	30-115
		1,4-Dichlorobenzene	28-104	27	NA	Terphenyl-d14	18-137
		N-Nitroso-di-n-propylamine	41-126	38	NA	Phenol-d5	24-113
		1,2,4-Trichlorobenzene	38-107	23	NA	2-Fluorophenol	25-121
		4-Chloro-3-methylphenol	26-103	33	NA	2,4,6-Tribromophenol	19-122
		Acenaphthene	31-137	19	NA	2-Chlorophenol-d4	20-130 (g)
		4-Nitrophenol	11-114	50	NA	1,2-Dichlorobenzene-d4	20-130 (g)
		2,4-Dinitrotoluene	28-89	47	NA		
		Pentachlorophenol	17-109	47	NA		
		Pyrene	35-142	36	NA		
Inorganics (i)	6010, 7470/7471, 7841, 9010	Inorganic Analyte	75-125 (j)	20 (k)	80-120	NA	NA
PCBs	8082	PCB (Aroclor 1260)	50-128	50	NA	Tetrachlorometaxylene	24-154
						Decachlorobiphenyl	25-159

(a) Analytical Methods: USEPA SW-846, 3rd edition, Revision 1, November 1990, any subsequent revisions shall supersede this information

(b) Matrix Spike/Matrix Spike Duplicate

(c) Relative Percent Difference

(d) Laboratory Control Sample

(e) Target Compound List Volatile Organic Compounds

(f) Target Compound List Semivolatile Organic Compounds

(g) Limits are advisory only

(h) Polychlorinated Biphenyls

(i) Target Analyte List Inorganics (metals and cyanide)

(j) Matrix spike only

(k) Laboratory duplicate RPD

NA - Not Applicable

### 3.3 ACCURACY

Accuracy is a measure of the degree of agreement of a measured value with the true or expected value of the quantity of concern (Taylor, 1987), or the difference between a measured value and the true or accepted reference value. The accuracy of an analytical procedure is best determined by the analysis of a sample containing a known quantity of material, and is expressed as the percent of the known quantity, which is recovered or measured. The recovery of a given analyte is dependent upon the sample matrix, method of analysis, and the specific compound or element being determined. The concentration of the analyte relative to the detection limit of the analytical method is also a major factor in determining the accuracy of the measurement. Concentrations of analytes, which are close to the detection limits are less accurate because they are more affected by such factors as instrument "noise". Higher concentrations will not be as affected by instrument noise or other variables and thus will be more accurate.

Sampling accuracy may be determined through the assessment of the analytical results of field blanks and trip blanks for each sample set. Analytical accuracy is typically assessed by examining the percent recoveries of surrogate compounds that are added to each sample (organic analyses only), and the percent recoveries of matrix spike compounds added to selected samples and laboratory blanks. Additionally, initial and continuing calibrations must be performed and accomplished within the established method control limits to define the instrument accuracy before analytical accuracy can be determined for any sample set.

Accuracy is normally measured as the percent recovery (%R) of a known amount of analyte, called a spike, added to a sample (matrix spike) or to a blank (blank spike). The %R is calculated as follows:

$$\%R = \frac{SSR - SR}{SA} \times 100$$

where:

%R = Percent recovery.

SSR = Spike sample result: concentration of analyte obtained by analyzing the sample with the spike added.

SR = Sample result: the background value, i.e., the concentration of the analyte obtained by analyzing the sample.

SA = Spiked analyte: concentration of the analyte spike added to the sample.

The acceptance limits for accuracy for each parameter are presented in Tables 3.1 and 3.2.

---

### **3.4 REPRESENTATIVENESS**

Representativeness expresses the degree to which sample data accurately and precisely represent a characteristic of a population, parameter variations at a sampling point, or an environmental condition. Representativeness is a qualitative parameter, which is most concerned with the proper design of the sampling program (USEPA, 1987). Samples must be representative of the environmental media being sampled. Selection of sample locations and sampling procedures will incorporate consideration of obtaining the most representative sample possible.

Field and laboratory procedures will be performed in such a manner as to ensure, to the degree that is technically possible, that the data derived represents the in-place quality of the material sampled. Every effort will be made to ensure chemical compounds will not be introduced into the sample via sample containers, handling, and analysis. Decontamination of sampling devices and digging equipment will be performed between samples as outlined in the Field Sampling Plan. Analysis of field blanks, trip blanks, and method blanks will also be performed to monitor for potential sample contamination from field and laboratory procedures.

The assessment of representativeness also must consider the degree of heterogeneity in the material from which the samples are collected. Sampling heterogeneity will be evaluated during data validation through the analysis of coded field duplicate samples. The analytical laboratory will also follow acceptable procedures to assure the samples are adequately homogenized prior to taking aliquots for analysis, so the reported results are representative of the sample received.

Chain-of-custody procedures will be followed to document that contamination of samples has not occurred during container preparation, shipment, and sampling. Details of blank, duplicate and Chain-of-custody procedures are presented in Sections 4 and 5.

### **3.5 COMPLETENESS**

Completeness is defined as the percentage of measurements made which are judged to be valid (USEPA, 1987). The QC objective for completeness is generation of valid data for at least 90 percent of the analyses requested. Completeness is defined as follows for all sample measurements:

$$\%C = \frac{V}{T} \times 100$$

where:

%C = Percent completeness.

V = Number of measurements judged valid.

T = Total number of measurements.

---

### **3.6 COMPARABILITY**

Comparability expresses the degree of confidence with which one data set can be compared to another (USEPA, 1987). The comparability of all data collected for this project will be ensured by:

- Using identified standard methods for both sampling and analysis phases of this project;
- Requiring traceability of all analytical standards and/or source materials to the USEPA or National Institute of Standards and Technology (NIST);
- Requiring that all calibrations be verified with an independently prepared standard from a source other than that used for calibration (if applicable);
- Using standard reporting units and reporting formats including the reporting of QC data;
- Performing a complete data validation on a representative fraction of the analytical results, including the use of data qualifiers in all cases where appropriate; and
- Requiring that all validation qualifiers be used any time an analytical result is used for any purpose.

These steps will ensure all future users of either the data or the conclusions drawn from them will be able to judge the comparability of these data and conclusions.

---

## **4.0 SAMPLING PROGRAM**

### **4.1 INTRODUCTION**

The sampling program will provide data concerning the presence and the nature and extent of contamination of soil, groundwater, and soil vapor, if any. This section presents sample nomenclature, sample container preparation procedures, sample preservation procedures, and sample holding times requirements. Sample locations, and the number of environmental and QC samples will be determined per disposal facility requirements. The sampling will be conducted in accordance with the RIWP.

### **4.2 SAMPLE NOMENCLATURE**

The sample nomenclature system has been devised such that the following objectives can be attained:

- Sorting of data by matrix;
- Sorting of data by depth;
- Maintenance of consistency (filed, laboratory, and database sample numbers);
- Accommodation of all project-specific requirements; and
- Accommodation of laboratory sample number length constraints (maximum 20 characters).

Sample nomenclature procedures are provided as Attachment B.

### **4.3 SAMPLE CONTAINER PREPARATION AND SAMPLE PRESERVATION**

Sample containers will be properly washed and decontaminated prior to their use by either the analytical laboratory or the container vendor to the specifications required by the USEPA. Copies of the sample container QC analyses will be provided by the laboratory for each container lot used to obtain samples. The containers will be labeled and the appropriate preservatives will be added. The types of containers are shown in Tables 4.1, 4.2, and 4.3.

Samples shall be preserved according to the preservation techniques given in Tables 4.1, 4.2, and 4.3. Preservatives will be added to the sample bottles by the laboratory prior to their shipment in sufficient quantities to ensure that proper sample pH is met. Following sample collection, the sample bottles should be placed on ice in the shipping cooler, cooled to 4°C with ice or "blue ice", and delivered to the laboratory within 48 hours of collection. Chain-of-custody procedures are described in Section 7.

---

#### **4.4 SAMPLE HOLDING TIMES**

The sample holding times for organic and inorganic parameters are given in Tables 4.1, 4.2, and 4.3 and must be in accordance with the NYSDEC ASP requirements. The NYSDEC ASP holding times must be strictly adhered to by the laboratory. Any holding time exceedances must be reported to Langan.

#### **4.5 FIELD QC SAMPLES**

To assess field sampling and decontamination performance, two types of "blanks" will be collected and submitted to the laboratory for analyses. In addition, the precision of field sampling procedures will be assessed by collecting coded field duplicates and matrix spike/matrix spike duplicates (MS/MSDs). The blanks will include:

- a. Trip Blanks - A trip blank will be prepared before the sample containers are sent by the laboratory. The trip blank will consist of a 40-ml VOA vial containing distilled, deionized water, which accompanies the other water sample bottles into the field and back to the laboratory. A trip blank will be included with each shipment of water samples for Part 375 volatiles analysis. The Trip Blank will be analyzed for volatile organic compounds to assess any contamination from sampling and transport, and internal laboratory procedures.
- b. Field Blanks - Field blanks will be taken at a minimum frequency of one per 20 field samples per sample matrix. Field blanks are used to determine the effectiveness of the decontamination procedures for sampling equipment. The field blank will consist of a sample of deionized, distilled water provided by the laboratory that has passed through a decontaminated bailer, tubing or other sampling apparatus. It is usually collected as a last step in the decontamination procedure, prior to taking an environmental sample. The field blank may be analyzed for all or some of the parameters of interest.

The duplicates will include:

- a. Coded Field Duplicate - To determine the representativeness of the sampling methods, coded field duplicates will be collected at a minimum frequency of one per 20 field samples. The samples are termed "coded" because they will be labeled in such a manner that the laboratory will not be able to determine that they are a duplicate sample. This will eliminate any possible bias that could arise.
  - b. Matrix Spike/Matrix Spike Duplicate (MS/MSD) - MS/MSD samples (MS/MSD for organics; MS and laboratory duplicate for inorganics) will be taken at a frequency of one pair per 20 field samples. These samples are used to assess the effect of the sample matrix on the recovery of target compounds or target analytes. The percent recoveries and RPDs are given in Tables 3.1 and 3.2.
-

**TABLE 4.1**  
**WATER SAMPLE CONTAINERIZATION, PRESERVATION,**  
**AND HOLDING TIMES**

<b>Analysis</b>	<b>Bottle Type</b>	<b>Preservation (a)</b>	<b>Holding Time (b)</b>
Volatile Organic Compounds (VOCs)	2-40 mL glass vial w/ Teflon septum	Cool to 4°C, HCL pH<2	7 days
Semi-volatile Organics Compounds (SVOCs)	1000 mL glass w/ Teflon lined cap	Cool to 4°C	7 days*
Polychlorinated Biphenyls (PCBs)	1000 mL glass w/ Teflon lined cap	Cool to 4°C	7 days
Metals	1000 mL plastic bottle	Nitric Acid to pH < 2 Cool to 4°C	6 months, except mercury (28 days)

(a) All samples to be preserved in ice during collection and transport.

(b) Days from validated time of sample receipt (VTSR).

\* Continuous liquid-liquid extraction is the required extraction for water samples for SVOCs. Continuous liquid-liquid extraction and concentration of water samples for SVOCs analysis completed within 7 days of VTSR. Extracts of water samples must be analyzed within 40 days of extraction.



**TABLE 4.2**  
**SOIL SAMPLE**  
**CONTAINERIZATION, PRESERVATION AND HOLDING TIMES**

<b>Analysis</b>	<b>Bottle Type</b>	<b>Preservation <sup>(a)</sup></b>	<b>Holding Time <sup>(b)</sup></b>
Volatile Organic Compounds (VOCs)	Wide-mouth glass w/ Teflon lined cap	Cool to 4°C	14 days
Other Organic Compounds <sup>(c)</sup>	Wide-mouth glass w/ Teflon lined cap	Cool to 4°C	14 days*
Metals	Wide-mouth plastic or glass	Cool to 4°C	6 months, except mercury (28 days)
PCBs	Wide-mouth glass w/ Teflon-lined cap	Cool to 4°C	14 days**

(a) All samples to be preserved in ice during collection and transport.

(b) Days from date of sample collection.

(c) Semi-volatile organic compounds or PCBs.

\* Soxhlet or sonication procedures for extraction and concentration of soil/waste samples for SVOCs must be completed within 10 days of VTSR. Extracts of soil samples must be analyzed within 40 days of extraction.

\*\* Procedures for extraction and concentration of soil/waste samples for PCBs must be completed within 14 days of VTSR. Extracts of soil samples must be analyzed within 40 days of extraction.

**TABLE 4.3**  
**SOIL VAPOR, INDOOR AIR, AND AMBIENT AIR SAMPLES**  
**CONTAINERIZATION PRESENTATION AND HOLDING TIMES**

<b>Analysis</b>	<b>Bottle Type</b>	<b>Preservation</b>	<b>Holding Time <sup>(a)</sup></b>
Volatile Organic Compounds (VOCs)	6- Liter Summa Canister	None	30 days

(a) Days from date of sample collection.

\* Summa canisters will be batch certified by the laboratory.

## **5.0 SAMPLE TRACKING AND CUSTODY**

### **5.1 INTRODUCTION**

This section presents sample custody procedures for both the field and laboratory. Implementation of proper custody procedures for samples generated in the field is the responsibility of field personnel. Both laboratory and field personnel involved in the Chain-of-custody (COC) and transfer of samples will be trained as to the purpose and procedures prior to implementation.

Evidence of sample traceability and integrity is provided by COC procedures. These procedures document the sample traceability from the selection and preparation of the sample containers by the laboratory, to sample collection, to sample shipment, to laboratory receipt and analysis. The sample custody flowchart is shown in Figure 5.1. A sample is considered to be in a person's custody if the sample is:

- In a person's possession;
- Maintained in view after possession is accepted and documented;
- Locked and tagged with Custody Seals so that no one can tamper with it after having been in physical custody; or
- In a secured area which is restricted to authorized personnel.

### **5.2 FIELD SAMPLE CUSTODY**


A COC record (Figure 5.2 or similar) accompanies the sample containers from selection and preparation at the laboratory, during shipment to the field for sample containment and preservation, and during return to the laboratory. Triplicate copies of the COC must be completed for each sample set collected.

The COC lists the field personnel responsible for taking samples, the project name and number, the name of the analytical laboratory to which the samples are sent, and the method of sample shipment. The COC also lists a unique description of every sample bottle in the set. If samples are split and sent to different laboratories, a copy of the COC record will be sent with each sample.

The REMARKS space on the COC is used to indicate if the sample is a matrix spike, matrix spike duplicate, or any other sample information for the laboratory. Since they are not specific to any one sample point, trip and field blanks are indicated on separate rows. Once all bottles are properly accounted for on the form, a sampler will write his or her signature and the date and time on the first RELINQUISHED BY space. The sampler will also write the method of shipment, the shipping cooler identification number, and the shipper airbill number on the top of the COC.

---

Figure 5-1 Sample Custody

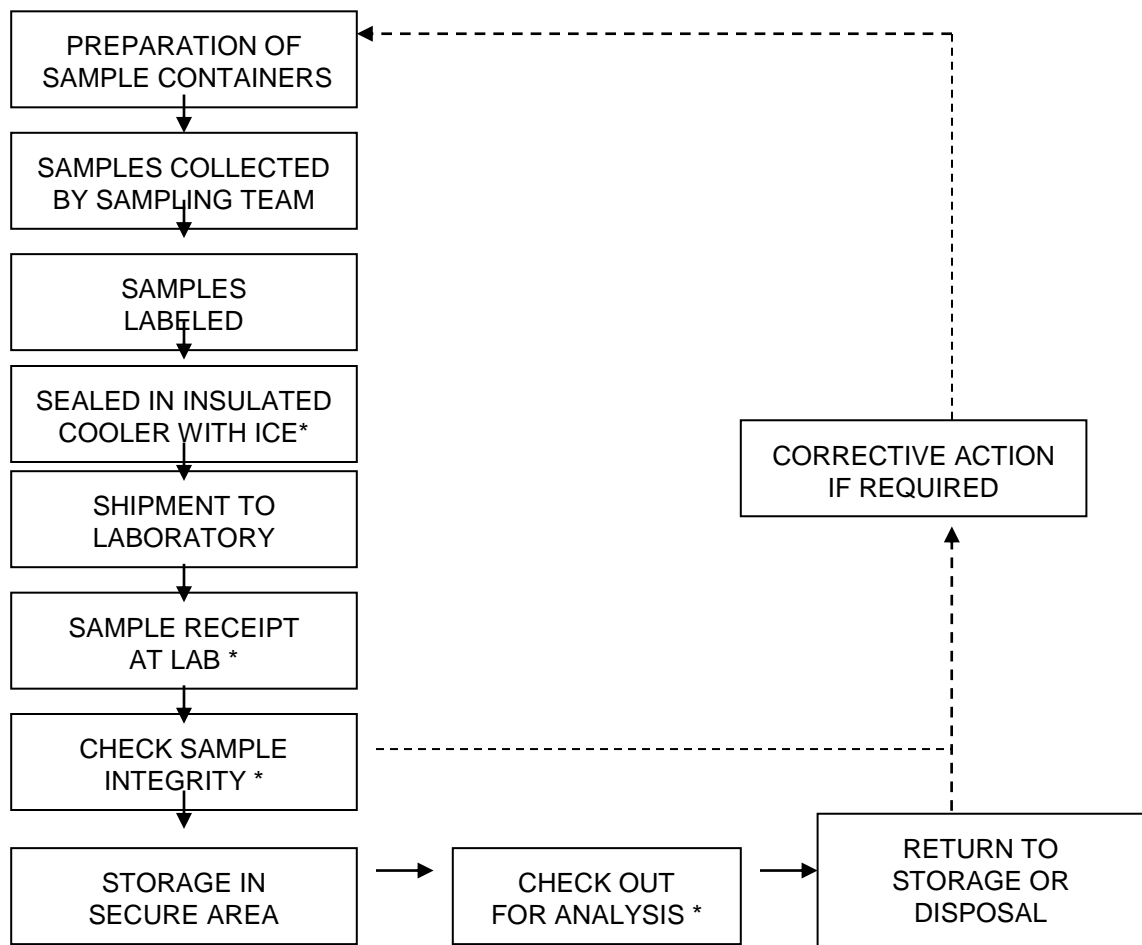

\* REQUIRES SIGN-OFF ON CHAIN-OF-CUSTODY FORM

**E Langan**  
Engineering and En

## Engineering and Environmental Services

PAGE \_\_\_\_\_ OF \_\_\_\_\_

[illegible]

Mistakes will be crossed out with a single line in ink and initialed by the author.

One copy of the COC is retained by sampling personnel (notations identifying blind duplicate samples will be added to this copy of the COC but not the others that will go to the laboratory) and the other two copies are put into a sealable plastic bag and taped inside the lid of the shipping cooler. The cooler lid is closed, custody seals provided by the laboratory are affixed to the latch and across the back and front lids of the cooler, and the person relinquishing the samples signs their name across the seal. The seal is taped, and the cooler is wrapped tightly with clear packing tape. It is then relinquished by field personnel to personnel responsible for shipment, typically an overnight carrier. The COC seal must be broken to open the container. Breakage of the seals before receipt at the laboratory may indicate tampering. If tampering is apparent, the laboratory will contact the Project Manager, and the sample will not be analyzed.

### **5.3 LABORATORY SAMPLE CUSTODY**

The Project Manager or Field Team Leader will notify the laboratory of upcoming field sampling activities, and the subsequent shipment of samples to the laboratory. This notification will include information concerning the number and type of samples to be shipped as well as the anticipated date of arrival.

The following laboratory sample custody procedures will be used:

- The laboratory will designate a sample custodian who will be responsible for maintaining custody of the samples, and for maintaining all associated records documenting that custody.
- Upon receipt of the samples, the custodian will check cooler temperature, and check the original COC documents and compare them with the labeled contents of each sample container for correctness and traceability. The sample custodian will sign the COC record and record the date and time received.
- Care will be exercised to annotate any labeling or descriptive errors. In the event of discrepant documentation, the laboratory will immediately contact the Project Manager or Field Team Leader as part of the corrective action process. A qualitative assessment of each sample container will be performed to note any anomalies, such as broken or leaking bottles. This assessment will be recorded as part of the incoming chain-of-custody procedure.
- The samples will be stored in a secured area at a temperature of approximately 4°C until analyses commence.
- A laboratory tracking record will accompany the sample or sample fraction through final analysis for control.
- A copy of the tracking record will accompany the laboratory report and will become a permanent part of the project records.

The laboratory will provide NYSDEC ASP Category B data deliverables.

---



## **6.0 CALIBRATION PROCEDURES**

### **6.1 FIELD INSTRUMENTS**

All field analytical equipment will be calibrated immediately prior to each day's use. The calibration procedures will conform to manufacturer's standard instructions. This calibration will ensure that the equipment is functioning within the allowable tolerances established by the manufacturer and required by the project. Records of all instrument calibration will be maintained by the Field Team Leader. Copies of all the instrument manuals will be maintained on-site by the Field Team Leader.

Calibration procedures for instruments used for monitoring health and safety hazards (e.g., photoionization detector and explosimeter) are provided in the Health and Safety Plan.

### **6.2 LABORATORY INSTRUMENTS**

The laboratory will follow all calibration procedures and schedules as specified in the sections of the USEPA SW-846 and subsequent updates that apply to the instruments used for the analytical methods given in Section 7.

---

## **7.0 ANALYTICAL PROCEDURES**

### **7.1 INTRODUCTION**

Samples will be analyzed according to the USEPA SW-846 "Test Methods for Evaluating Solid Waste," November 1986, 3rd edition and subsequent updates. The methods to be used for the laboratory analysis of water and soil samples are presented in Table 7.1. These methods were selected because they attain the desired quantitation limits, which are compiled on Table 7.1.



**TABLE 7.1**  
**PROJECT QUANTITATION LIMITS**

		<b>Estimated Quantitation Limits</b>	
	<b>Analysis/Compound</b>	<b>Method</b>	<b>RL (mg/L) MDL(mg/kg)</b>
	<b>Volatile Organics</b>		
1	Methylene Chloride	SW8260B	0.034 0.0028
2	1,1-Dichloroethane	SW8260B	0.0051 0.001
3	Chloroform	SW8260B	0.0051 0.0011
4	Carbon Tetrachloride	SW8260B	0.0034 0.00072
5	1,2-Dichloropropane	SW8260B	0.012 0.00087
6	Dibromochloromethane	SW8260B	0.0034 0.001
7	1,1,2-Trichloroethane	SW8260B	0.0051 0.0013
8	Tetrachloroethene	SW8260B	0.0034 0.001
9	Chlorobenzene	SW8260B	0.0034 0.00064
10	Trichloroflouromethane	SW8260B	0.017 0.0013
11	1,2-Dichloroethane	SW8260B	0.0034 0.00078
12	1,1,1-Trichloroethane	SW8260B	0.0034 0.00092
13	Bromodichloromethane	SW8260B	0.0034 0.0016
14	Trans-1,3-Dichloropropene	SW8260B	0.0034 0.0017
15	Cis-1,3-Dichloropropene	SW8260B	0.0034 0.00082
16	1,1-Dichloropropene	SW8260B	0.017 0.001
17	Bromoform	SW8260B	0.014 0.00083
18	1,1,2,2-Tetrachloroethane	SW8260B	0.0034 0.00076
19	Benzene	SW8260B	0.0034 0.0027
20	Toluene	SW8260B	0.0051 0.0022
21	Ethylbenzene	SW8260B	0.0034 0.0026
f22	Chloromethane	SW8260B	0.017 0.0015
23	Bromomethane	SW8260B	0.0068 0.00089
24	Vinyl Chloride	SW8260B	0.0068 0.0013
25	Chloromethane	SW8260B	0.0068 0.00077
26	1,1-Dichloroethene	SW8260B	0.0034 0.0012
27	Trans-1,2-Dichloroethene	SW8260B	0.0051 0.0014
28	Trichloroethene	SW8260B	0.0034 0.0014
29	1,2-Dichlorobenzene	SW8260B	0.017 0.0017
30	1,3-Dichlorobenzene	SW8260B	0.017 0.0015
31	1,4-Dichlorobenzene	SW8260B	0.017 0.0014
32	Methyl tert butyl ether	SW8260B	0.0068 0.001
33	p/m-Xylene	SW8260B	0.0068 0.0015

**TABLE 7.1 (Continued)**  
**PROJECT QUANTITATION LIMITS PROJECT QUANTITATION LIMITS**

	Analysis/Compound	Method	Estimated Quantitation	
			Water (mg/L)	Soil (mg/kg)
	Volatile Organics (cont.)			
34	o-xylene	SW8260B	0.0068	0.0014
35	Cis-1,2-Dichloroethene	SW8260B	0.0034	0.001
36	Dibromomethane	SW8260B	0.034	0.0015
37	Styrene	SW8260B	0.0068	0.0025
38	Dichlorodiflouromethane	SW8260B	0.034	0.0013
39	Acetone	SW8260B	0.034	0.011
40	Carbon disulfide	SW8260B	0.034	0.0013
41	2-Butanone	SW8260B	0.034	0.013
42	Vinyl acetate	SW8260B	0.034	0.0026
43	4-Methyl-2pentanone	SW8260B	0.034	0.0028
44	1,2,3-Trichloropropane	SW8260B	0.034	0.0013
45	2-Hexanone	SW8260B	0.034	0.0014
46	Bromochloromethane	SW8260B	0.017	0.001
47	2,2-Dichloropropane	SW8260B	0.017	0.0027
48	1,2-Dibromoethane	SW8260B	0.014	0.0014
49	1,3-Dichloropropane	SW8260B	0.017	0.0019
50	1,1,1,2-Tetrachloroethane	SW8260B	0.0034	0.0011
51	Bromobenzene	SW8260B	0.017	0.00075
52	n-Butylbenzene	SW8260B	0.0034	0.0011
53	Sec-Butylbenzene	SW8260B	0.0034	0.00094
54	Tert-Butylbenzene	SW8260B	0.017	0.0021
55	0-chlorotoluene	SW8260B	0.017	0.0011
56	p-chlorotoluene	SW8260B	0.017	0.0012
57	1,2-Dibromo-3-chloropropane	SW8260B	0.017	0.0029
58	Hexachlorobutadiene	SW8260B	0.017	0.0016
59	Isopropylbenzene	SW8260B	0.0034	0.00061
60	p-Isopropylbenzene	SW8260B	0.0034	0.00094
61	Naphthalene	SW8260B	0.017	0.0026
62	Acrylonitrile	SW8260B	0.034	0.0013
63	n-Propylbenzene	SW8260B	0.0034	0.00097
64	1,2,3-Trichlorobenzene	SW8260B	0.017	0.0014
65	1,2,4-Trimethylbenzene	SW8260B	0.017	0.0027
66	1,3,5-Trimethylbenzene	SW8260B	0.017	0.0021
67	1,2,4-Trimethylbenzene	SW8260B	0.017	0.002

**TABLE 7.1 (Continued)**  
**PROJECT QUANTITATION LIMITS**

		Estimated Quantitation Limits		
Analysis/Compound	Method	RL (ug/L)	MDL (ug/kg)	
Volatile Organics (cont.)				
68	1,4-Diethylbenzene	SW8260B	0.014	0.00068
69	4-Ethyltoluene	SW8260B	0.014	0.00033
70	1,2,4,5-Tetramethylbenzene	SW8260B	0.014	0.00062
71	Ethyl ether	SW8260B	0.017	0.0013
72	Trans-1,4-Dichloro-2-butene	SW8260B	0.017	0.0051
Semivolatile Organics				
1	Acenaphthalene	SW8270C	0.18	0.042
2	1,2,4-Trichlorobenzene	SW8270C	0.22	0.037
3	Hexachlorobenzene	SW8270C	0.14	0.035
4	Bis(2-chloroethyl)ether	SW8270C	0.2	0.043
5	2-Chloronaphthalene	SW8270C	0.22	0.068
6	1,2-Dichlorobenzene	SW8270C	0.22	0.066
7	1,3-Dichlorobenzene	SW8270C	0.22	0.07
8	1,4-Dichlorobenzene	SW8270C	0.22	0.064
9	3,3'-Dichlorobenzidine	SW8270C	0.22	0.081
10	2,4-Dinitrotoluene	SW8270C	0.22	0.06
11	2,6-Dinitrotoluene	SW8270C	0.22	0.074
12	Fluoranthene	SW8270C	0.14	0.029
13	4-Chlorophenyl phenyl ether	SW8270C	0.22	0.031
14	4-Bromophenyl phenyl ether	SW8270C	0.22	0.036
15	Bis(2-chloroisopropyl)ether	SW8270C	0.27	0.072
16	Bis(2-chloroethoxy)methane	SW8270C	0.24	0.051
17	Hexachlorobutadiene	SW8270C	0.22	0.042
18	Hexachlorocyclopentadiene	SW8270C	0.65	0.18
19	Hexachloroethane	SW8270C	0.18	0.032
20	Isophorone	SW8270C	0.2	0.036
21	Naphthalene	SW8270C	0.22	0.072
22	Nitrobenzene	SW8270C	0.2	0.066
23	NitrosoDiPhenylAmine(NDPA/DPA)	SW8270C	0.18	0.056
24	n-Nitrosodi-n-propylamine	SW8270C	0.22	0.063
25	Bis(2-Ethylhexyl)phthalate	SW8270C	0.22	0.047

**TABLE 7.1 (Continued)**  
**PROJECT QUANTITATION LIMITS**

		<b>Estimated Quantitation Limits</b>	
<b>Analysis/Compound</b>	<b>Method</b>	<b>RL (mg/L)</b>	<b>MDL (mg/kg)</b>
<b>Semivolatile Organics (cont.)</b>			
26 Butyl benzyl phthalate	SW8270C	0.22	0.063
27 Di-n-butylphthalate	SW8270C	0.22	0.038
28 Di-n-octylphthalate	SW8270C	0.22	0.061
29 Diethyl phthalate	SW8270C	0.22	0.039
30 Dimethyl phthalate	SW8270C	0.22	0.037
31 Benzo(a)anthracene	SW8270C	0.14	0.045
32 Benzo(a)pyrene	SW8270C	0.18	0.054
33 Benzo(b)fluoranthene	SW8270C	0.14	0.036
34 Benzo(k)fluoranthene	SW8270C	0.14	0.035
35 Chrysene	SW8270C	0.14	0.029
36 Acenaphthylene	SW8270C	0.18	0.058
37 Anthracene	SW8270C	0.14	0.03
38 Benzo(ghi)perylene	SW8270C	0.18	0.057
39 Fluorene	SW8270C	0.22	0.041
40 Phanthrene	SW8270C	0.14	0.038
41 Dibenzo(a,h)anthracene	SW8270C	0.14	0.042
42 Indeno(1,2,3-cd)Pyrene	SW8270C	0.18	0.055
43 Pyrene	SW8270C	0.14	0.037
44 Biphenyl	SW8270C	0.51	0.016
45 4-Chloroaniline	SW8270C	0.22	0.024
46 2-Nitroaniline	SW8270C	0.22	0.041
47 3-Nitroaniline	SW8270C	0.22	0.023
48 4-Nitroaniline	SW8270C	0.22	0.051
49 Dibenzofuran	SW8270C	0.22	0.036
50 2-Methylnaphthalene	SW8270C	0.27	0.089
51 1,2,4-Tetrachlorobenzene	SW8270C	0.22	0.066
52 Acetophenone	SW8270C	0.22	0.072
53 2,4,6-Trichlorophenol	SW8270C	0.14	0.041
54 P-chloro-M-Cresol	SW8270C	0.22	0.046
55 2-Chlorophenol	SW8270C	0.22	0.07

**TABLE 7.1 (Continued)**  
**PROJECT QUANTITATION LIMITS**

		Estimated Quantitation Limits		
Analysis/Compound	Method	RL (mg/L)	MDL (mg/kg)	
Semivolatile Organics (cont.)				
56	2,4-Dinitrophenol	SW8270C	0.2	0.066
57	2,4-Dimethylphenol	SW8270C	0.22	0.034
58	2-Nitrophenol	SW8270C	0.2	0.16
59	4-Nitrophenol	SW8270C	0.49	0.096
60	2,4-Dinitro	SW8270C	0.32	0.35
61	4,6-Dinitro-o-cresol	SW8270C	1.1	0.21
62	Pentachlorophenol	SW8270C	0.59	0.053
63	Phenol	SW8270C	0.18	0.066
64	2-Methylphenol	SW8270C	0.22	0.056
65	3-Methylphenol/4-Methylphenol	SW8270C	0.22	0.097
66	2,4,5-Trichlorophenol	SW8270C	0.32	0.052
67	Benzoic Acid	SW8270C	0.22	0.19
68	Benzyl Alcohol	SW8270C	0.73	0.052
69	Carbazole	SW8270C	0.22	0.032
PCBs				
1	Aroclor-1016	SW8082	0.0469	0.009
2	Aroclor-1221	SW8082	0.0469	0.014
3	Aroclor-1232	SW8082	0.0469	0.01
4	Aroclor-1242	SW8082	0.0469	0.009
5	Aroclor-1248	SW8082	0.0469	0.006
6	Aroclor-1254	SW8082	0.0469	0.007
7	Aroclor-1260	SW8082	0.0469	0.008
Metals				
1	Aluminum	SW6010B	10	2.3
2	Antimony	SW6010B	5.2	1
3	Arsenic	SW6010B	1	0.36
4	Barium	SW6010B	1	0.09
5	Beryllium	SW6010B	0.52	0.04
6	Cadmium	SW6010B	1	0.07

**TABLE 7.1 (Continued)**  
**PROJECT QUANTITATION LIMITS**

Analysis/Compound		Method	Estimated Quantitation Limits	
			RL (mg/L)	MDL (mg/kg)
<b>Metals (cont.)</b>				
7	Calcium	SW6010B	10	2.3
8	Chromium	SW6010B	1	0.21
9	Cobalt	SW6010B	2.1	0.22
10	Copper	SW6010B	1	1
11	Iron	SW6010B	5.2	1.8
12	Lead	SW6010B	5.2	0.29
13	Magnesium	SW6010B	10	4.7
14	Manganese	SW6010B	1	0.11
15	Mercury	SW7471A	0.1	0.02
16	Nickel	SW6010B	2.6	0.29
17	Potassium	SW6010B	260	84
18	Selenium	SW6010B	2.1	0.34
19	Silver	SW6010B	1	0.17
20	Sodium	SW6010B	210	83
21	Thallium	SW6010B	2.1	0.65
22	Vanadium	SW6010B	1	0.23
23	Zinc	SW6010B	5.2	0.57

**TABLE 7.1 (Continued)**  
**PROJECT QUANTITATION LIMITS**

Analysis/Compound	Method	Estimated Quantitation Limits	
		RL (mg/L)	MDL (mg/kg)
Pesticides			
1 Delta-BHC	SW8081A	0.0029	0.000448
2 Lindane	SW8081A	0.000954	0.000426
3 Alpha-BHC	SW8081A	0.000954	0.000271
4 Beta-BHC	SW8081A	0.00229	0.000868
5 Heptachlor	SW8081A	0.00114	0.000513
6 Aldrin	SW8081A	0.00429	0.000806
7 Heptachlor epoxide	SW8081A	0.00429	0.00129
8 Endrin	SW8081A	0.000954	0.000391
9 Endrin Ketone	SW8081A	0.00229	0.00059
10 Dieldrin	SW8081A	0.00143	0.000715
11 4,4'-DDE	SW8081A	0.00229	0.000529
12 4,4'-DDD	SW8081A	0.00229	0.000816
13 4,4'-DDT	SW8081A	0.0033	0.00184
14 Endosulfan I	SW8081A	0.00229	0.000541
15 Endosulfan II	SW8081A	0.00229	0.000765
16 Endosulfan sulfate	SW8081A	0.000954	0.000436
17 Methoxychlor	SW8081A	0.00429	0.00134
18 Toxaphene	SW8081A	0.0429	0.012
19 Trans-Chlordane	SW8081A	0.00286	0.000756
20 Chlordane	SW8081A	0.0186	0.00758

Notes:

- (1) - = No Standard
- (2) RL = Reporting Limit
- (3) MDL = Minimum Detection Limit
- (4) RL and MDL values are taken from representative laboratory reports issued by Alpha Analytical Laboratories
- (5) RL and MDL values are estimated and may vary depending on instruments

## **8.0 DATA REDUCTION, VALIDATION, AND REPORTING**

### **8.1 INTRODUCTION**

Data collected during the field investigation will be reduced and reviewed by the laboratory QA personnel, and a report on the findings will be tabulated in a standard format. The criteria used to identify and quantify the analytes will be those specified for the applicable methods in the USEPA SW-846 and subsequent updates. The data package provided by the laboratory will contain all items specified in the USEPA SW-846 appropriate for the analyses to be performed, and be reported in standard format.

The completed copies of the chain-of-custody records (both external and internal) accompanying each sample from time of initial bottle preparation to completion of analysis shall be attached to the analytical reports.

### **8.2 DATA REDUCTION**

The Analytical Services Protocol (ASP) Category B data packages and an electronic data deliverable (EDD) will be provided by the laboratory after receipt of a complete sample delivery group. The Project Manager will immediately arrange for archiving the results and preparation of result tables. These tables will form the database for assessment of the site contamination condition.

Each EDD deliverable must be formatted using a Microsoft Windows operating system and the NYSDEC data deliverable format for EQulS. To avoid transcription errors, data will be loaded directly into the ASCII format from the laboratory information management system (LIMS). If this cannot be accomplished, the consultant should be notified via letter of transmittal indicating that manual entry of data is required for a particular method of analysis. All EDDs must also undergo a QC check by the laboratory before delivery. The original data, tabulations, and electronic media are stored in a secure and retrievable fashion.

The Project Manager or Task Manager will maintain close contact with the QA reviewer to ensure all non-conformance issues are acted upon prior to data manipulation and assessment routines. Once the QA review has been completed, the Project Manager may direct the Team Leaders or others to initiate and finalize the analytical data assessment.

---



### 8.3 DATA VALIDATION

Data validation will be performed in accordance with the USEPA validation guidelines for organic and inorganic data review. Validation will include the following:

- Verification of the QC sample results,
- Verification of the identification of sample results (both positive hits and non-detects),
- Recalculation of 10% of all investigative sample results, and
- Preparation of Data Usability Summary Reports (DUSR).

A DUSR will be prepared and reviewed by the QAO before issuance. The DUSR will present the results of data validation, including a summary assessment of laboratory data packages, sample preservation and COC procedures, and a summary assessment of precision, accuracy, representativeness, comparability, and completeness for each analytical method. A detailed assessment of each SDG will follow. For each of the organic analytical methods, the following will be assessed:

- Holding times;
- Instrument tuning;
- Instrument calibrations;
- Blank results;
- System monitoring compounds or surrogate recovery compounds (as applicable);
- Internal standard recovery results;
- MS and MSD results;
- Target compound identification;
- Chromatogram quality;
- Pesticide cleanup (if applicable);
- Compound quantitation and reported detection limits;
- System performance; and
- Results verification.

For each of the inorganic compounds, the following will be assessed:

- Holding times;
  - Calibrations;
  - Blank results;
  - Interference check sample;
  - Laboratory check samples;
  - Duplicates;
  - Matrix Spike;
  - Furnace atomic absorption analysis QC;
  - ICP serial dilutions; and
-

- Results verification and reported detection limits.

Based on the results of data validation, the validated analytical results reported by the laboratory will be assigned one of the following usability flags:

- "U" - Not detected. The associated number indicates the approximate sample concentration necessary to be detected significantly greater than the level of the highest associated blank;
  - "UJ" - Not detected. Quantitation limit may be inaccurate or imprecise;
  - "J" - Analyte is present. Reported value may be associated with a higher level of uncertainty than is normally expected with the analytical method
  - "N" – Tentative identification. Analyte is considered present in the sample;
  - "R" – Unreliable result; data is rejected or unusable. Analyte may or may not be present in the sample; and
  - No Flag - Result accepted without qualification.
-

## **9.0 INTERNAL QUALITY CONTROL CHECKS AND FREQUENCY**

### **9.1 QUALITY ASSURANCE BATCHING**

Each set of samples will be analyzed concurrently with calibration standards, method blanks, matrix spikes (MS), matrix spike duplicates (MSD) or laboratory duplicates, and QC check samples (if required by the protocol). The MS/MSD samples will be designated by the field personnel. If no MS/MSD samples have been designated, the laboratory will contact the Langan Project Manager for corrective action.

### **9.2 CALIBRATION STANDARDS AND SURROGATES**

All organic standard and surrogate compounds are checked by the method of mass spectrometry for correct identification and gas chromatography for degree of purity and concentration. All standards are traceable to a source of known quality certified by the USEPA or NIST, or other similar program. When the compounds pass the identity and purity tests, they are certified for use in standard and surrogate solutions. Concentrations of the solutions are checked for accuracy before release for laboratory use. Standard solutions are replaced monthly or more frequently, based upon data indicating deterioration.

### **9.3 ORGANIC BLANKS AND MATRIX SPIKE**

Analysis of blank samples verifies that the analytical method does not introduce contaminants or detect "false positives". The blank water can be generated by reverse osmosis and Super-Q filtration systems, or distillation of water containing  $\text{KMnO}_4$ . The matrix spike is generated by addition of surrogate standard to each sample.

### **9.4 TRIP AND FIELD BLANKS**

Trip blanks and field blanks will be utilized in accordance with the specifications in Section 4. These blanks will be analyzed to provide a check on sample bottle preparation and to evaluate the possibility of atmospheric or cross contamination of the samples.

---

## **10.0 QUALITY ASSURANCE PERFORMANCE AUDITS AND SYSTEM AUDITS**

### **10.1 INTRODUCTION**

Quality assurance audits may be performed by the project quality assurance group under the direction and approval of the QAO. These audits will be implemented to evaluate the capability and performance of project and subcontractor personnel, items, activities, and documentation of the measurement system(s). Functioning as an independent body and reporting directly to corporate quality assurance management, the QAO may plan, schedule, and approve system and performance audits based upon procedures customized to the project requirements. At times, the QAO may request additional personnel with specific expertise from company and/or project groups to assist in conducting performance audits. However, these personnel will not have responsibility for the project work associated with the performance audit.

### **10.2 SYSTEM AUDITS**

System audits may be performed by the QAO or designated auditors, and encompass a qualitative evaluation of measurement system components to ascertain their appropriate selection and application. In addition, field and laboratory quality control procedures and associated documentation may be system audited. These audits may be performed once during the performance of the project. However, if conditions adverse to quality are detected or if the Project Manager requests, additional audits may occur.

### **10.3 PERFORMANCE AUDITS**

The laboratory may be required to conduct an analysis of Performance Evaluation samples or provide proof that Performance Evaluation samples submitted by USEPA or a state agency have been analyzed within the past twelve months.

### **10.4 FORMAL AUDITS**

Formal audits refer to any system or performance audit that is documented and implemented by the QA group. These audits encompass documented activities performed by qualified lead auditors to a written procedure or checklists to objectively verify that quality assurance requirements have been developed, documented, and instituted in accordance with contractual and project criteria. Formal audits may be performed on project and subcontractor work at various locations.

Audit reports will be written by auditors who have performed the site audit after gathering and evaluating all data. Items, activities, and documents determined by lead auditors to be in noncompliance shall be identified at exit interviews conducted with the involved management. Non-compliances will be logged, and documented through audit findings, which are attached to and are a part of the integral audit report. These audit-finding forms are directed to management to satisfactorily resolve the noncompliance in a specified and timely manner.

---

The Project Manager has overall responsibility to ensure that all corrective actions necessary to resolve audit findings are acted upon promptly and satisfactorily. Audit reports must be submitted to the Project Manager within fifteen days of completion of the audit. Serious deficiencies will be reported to the Project Manager within 24 hours. All audit checklists, audit reports, audit findings, and acceptable resolutions are approved by the QAO prior to issue. Verification of acceptable resolutions may be determined by re-audit or documented surveillance of the item or activity. Upon verification acceptance, the QAO will close out the audit report and findings.

## **11.0 PREVENTIVE MAINTENANCE PROCEDURES AND SCHEDULES**

### **11.1 PREVENTIVE MAINTENANCE PROCEDURES**

Equipment, instruments, tools, gauges, and other items requiring preventive maintenance will be serviced in accordance with the manufacturer's specified recommendations and written procedure developed by the operators.

A list of critical spare parts will be established by the operator. These spare parts will be available for use in order to reduce the downtime. A service contract for rapid instrument repair or backup instruments may be substituted for the spare part inventory.

### **11.2 SCHEDULES**

Written procedures will establish the schedule for servicing critical items in order to minimize the downtime of the measurement system. The laboratory will adhere to the maintenance schedule, and arrange any necessary and prompt service. Required service will be performed by qualified personnel.

### **11.3 RECORDS**

Logs shall be established to record and control maintenance and service procedures and schedules. All maintenance records will be documented and traceable to the specific equipment, instruments, tools, and gauges. Records produced shall be reviewed, maintained, and filed by the operators at the laboratories. The QAO may audit these records to verify complete adherence to these procedures.

---

## **12.0 CORRECTIVE ACTION**

### **12.1 INTRODUCTION**

The following procedures have been established to ensure that conditions adverse to quality, such as malfunctions, deficiencies, deviations, and errors, are promptly investigated, documented, evaluated, and corrected.

### **12.2 PROCEDURE DESCRIPTION**

When a significant condition adverse to quality is noted at site, laboratory, or subcontractor location, the cause of the condition will be determined and corrective action will be taken to preclude repetition. Condition identification, cause, reference documents, and corrective action planned to be taken will be documented and reported to the QAO, Project Manager, Field Team Leader and involved contractor management, at a minimum. Implementation of corrective action is verified by documented follow-up action.

All project personnel have the responsibility, as part of the normal work duties, to promptly identify, solicit approved correction, and report conditions adverse to quality. Corrective actions will be initiated as follows:

- When predetermined acceptance standards are not attained;
- When procedure or data compiled are determined to be deficient;
- When equipment or instrumentation is found to be faulty;
- When samples and analytical test results are not clearly traceable;
- When quality assurance requirements have been violated;
- When designated approvals have been circumvented;
- As a result of system and performance audits;
- As a result of a management assessment;
- As a result of laboratory/field comparison studies; and
- As required by USEPA SW-846, and subsequent updates, or by the NYSDEC ASP.

Project management and staff, such as field investigation teams, remedial response planning personnel, and laboratory groups, monitor on-going work performance in the normal course of daily responsibilities. Work may be audited at the sites, laboratories, or contractor locations. Activities, or documents ascertained to be noncompliant with quality assurance requirements will be documented. Corrective actions will be mandated through audit finding sheets attached to the audit report. Audit findings are logged, maintained, and controlled by the Task Manager.

Personnel assigned to quality assurance functions will have the responsibility to issue and control Corrective Action Request (CAR) Forms (Figure 12.1 or similar). The CAR identifies the out-of-compliance condition, reference document(s), and recommended corrective action(s) to be administered. The CAR is issued to the personnel responsible

---

for the affected item or activity. A copy is also submitted to the Project Manager. The individual to whom the CAR is addressed returns the requested response promptly to the QA personnel, affixing his/her signature and date to the corrective action block, after stating the cause of the conditions and corrective action to be taken. The QA personnel maintain the log for status of CARs, confirms the adequacy of the intended corrective action, and verifies its implementation. CARs will be retained in the project file for the records.

Any project personnel may identify noncompliance issues; however, the designated QA personnel are responsible for documenting, numbering, logging, and verifying the close out action. The Project Manager will be responsible for ensuring that all recommended corrective actions are implemented, documented, and approved.



FIGURE 12.1

<b>CORRECTIVE ACTION REQUEST</b>					
Number: _____			Date: _____		
TO: _____ You are hereby requested to take corrective actions indicated below and as otherwise determined by you to (a) resolve the noted condition and (b) to prevent it from recurring. Your written response is to be returned to the project quality assurance manager by _____					
CONDITION:					
REFERENCE DOCUMENTS:					
RECOMMENDED CORRECTIVE ACTIONS:					
_____ Originator	_____ Date	_____ Approval	_____ Date	_____ Approval	_____ Date
RESPONSE					
CAUSE OF CONDITION					
CORRECTIVE ACTION  (A) RESOLUTION (B) PREVENTION (C) AFFECTED DOCUMENTS					
C.A. FOLLOWUP: CORRECTIVE ACTION VERIFIED BY: _____ DATE: _____					

### **13.0 REFERENCES**

- USEPA, 1986. SW-846 "Test Method for Evaluating Solid Waste," dated November 1986. U.S. Environmental Protection Agency, Washington, D.C.
- Taylor, J. K., 1987. Quality Assurance of Chemical Measurements. Lewis Publishers, Inc., Chelsea, Michigan
- USEPA, 1987. Data Quality Objectives for Remedial Response Actions Activities: Development Process, EPA/540/G-87/003, OSWER Directive 9355.0-7- U.S. Environmental Protection Agency, Washington, D.C.
- USEPA, 1992a. CLP Organics Data Review and Preliminary Review. SOP No. HW-6, Revision #8, dated January 1992. USEPA Region II.
- USEPA, 1992b. Evaluation of Metals Data for the Contract Laboratory Program (CLP) based on SOW 3/90. SOP No. HW-2, Revision XI, dated January 1992. USEPA Region II.
-