
INTERIM REMEDIAL MEASURE WORK PLAN

for

GREENPOINT MARINA 43-57 WEST STREET & 2-24 OAK STREET BROOKLYN, NEW YORK

NYSDEC BCP NO.: C224190

Prepared For:

**57 West LLC & 24 Oak LLC
c/o Pearl Realty Management, LLC
155 Water Street, 3rd Floor
Brooklyn, New York 11201**

Prepared By:

**Langan Engineering, Environmental, Surveying
and Landscape Architecture, D.P.C.
21 Penn Plaza,
360 West 31st Street, 8th Floor
New York, New York 10001**

**January 2017
170267701**

LANGAN

TABLE OF CONTENTS

1.0	INTRODUCTION	1
1.1	General.....	1
1.2	Site Description.....	2
1.3	Redevelopment Plan.....	3
1.4	Site History.....	3
1.5	Summary of Remedial Investigation Report Findings.....	3
2.0	QUALITATIVE HUMAN AND FISH/WILDLIFE EXPOSURE ASSESSMENT	7
2.1	Current Conditions.....	7
2.2	Proposed Conditions.....	7
2.3	Summary of Environmental Conditions.....	8
2.4	Conceptual Site Model.....	8
2.4.1	Potential Sources of Contamination.....	8
2.4.2	Exposure Media.....	9
2.4.3	Receptor Populations.....	9
2.5	Potential Exposure Pathways – On-Site.....	9
2.5.1	Current Conditions.....	9
2.5.2	Construction/Remediation Condition.....	9
2.5.3	Proposed Future Conditions.....	10
2.6	Potential Exposure Pathways – Off-Site.....	10
2.7	Evaluation of Human Health Exposure.....	11
2.7.1	Current Conditions.....	11
2.7.2	Construction/Remediation Activities.....	12
2.7.3	Proposed Future Conditions.....	12
2.7.4	Human Health Exposure Assessment Conclusions.....	13
3.0	SUMMARY OF INTERIM REMEDIAL MEASURE	14
3.1	Objectives and Rationale.....	14
3.1.1	Site Preparation.....	15
3.1.2	IRM Phase I – UST Removal and Remediation.....	15
3.1.3	Building Demolition.....	16
3.1.4	IRM Phase II – Remediation of Petroleum Impacts on Northern Lot.....	16
3.1.5	Post-Excavation Documentation Sampling.....	16
3.1.6	Excavation Backfill.....	17
3.1.7	Monitoring Well Installation.....	17
3.2	Remedial Activity Oversight.....	17
3.3	Soil Screening Methods.....	18
3.4	Waste Characterization.....	18

3.5	Stockpile Methods.....	18
3.6	Material Load Out and Transport	19
3.7	Material Off-Site Disposal.....	20
3.8	Backfill Import and Placement	22
3.9	Dust, Odor, Vapor and Nuisance Control Plan.....	23
3.9.1	Dust, Odor and Vapor Control	23
3.10	Construction Health and Safety Plan.....	25
3.11	Notification	26
4.0	REPORTING.....	27
4.1	Daily Reports	27
4.2	Construction Completion Report	27
5.0	CERTIFICATION.....	29

FIGURES

- Figure 1: Site Location Map
- Figure 2: Site Plan
- Figure 3: Proposed Excavation and Documentation Sample Location Plan
- Figure 4: Monitoring Well Location Plan
- Figure 5: Truck Route Map

APPENDICES

- Appendix A: Remediation Schedule
- Appendix B: Construction Health and Safety Plan
- Appendix C: Community Air Monitoring Plan
- Appendix D: Quality Assurance Project Plan

1.0 INTRODUCTION

1.1 General

57 West LLC and 24 Oak LLC (the "Participants") entered into a Brownfield Cleanup Agreement (BCA) with the New York State Department of Environmental Conservation (NYSDEC) on September 12, 2014 to investigate and remediate a 3.98-acre (178,390-square-foot) property located at 43-57 West Street (Block 2567, Lot 1) and 2-24 Oak Street (Block 2570, Lot 36) in the Greenpoint neighborhood of Brooklyn, New York (the "site"). A site location map is provided as Figure 1.

To initiate the remediation, the Participants directed Langan to prepare this Interim Remedial Measures (IRM) Work Plan to address known environmental conditions and contaminant sources at the site. This IRM Work Plan was prepared to address petroleum impacts related to NYSDEC spill No. 13-08069 and resulting from releases from seven underground storage tanks (UST). The scope of this IRM Work Plan includes the following:

- Decommissioning and removal of seven registered (Petroleum Bulk Storage [PBS] No. 2-612246) USTs and update of the NYSDEC PBS registration status;
- Excavation, to the extent practicable, to remove grossly impacted petroleum material;
- Removal of residual light, non-aqueous phase liquid (LNAPL) from the open excavation;
- Demolition of a vacant masonry structure located north of the UST area to allow for additional removal of LNAPL and excavation of petroleum-impacted material;
- Collection of documentation soil samples from the base and sidewalls of all excavations;
- Backfilling of excavations, as necessary;
- Installation of three monitoring wells after excavation is complete for continued monitoring and potential recovery of residual LNAPL; and
- Closure of NYSDEC Spill No. 13-08069.

Locations of the known USTs are shown on the site plan provided as Figure 2.

This IRM Work Plan has been prepared in accordance with requirements of the New York State Brownfield Cleanup Program (BCP) and NYSDEC's May 2010 Division of Environmental Remediation (DER)-10 - Technical Guidance for Site Investigation and Remediation. The IRM will be completed in advance of completing a final remedy in accordance with the definition of an IRM (May 2010 DER-10):

***"Interim remedial measure" or "IRM"** means activities to address both emergency and non-emergency site conditions, which can be undertaken without extensive investigation and evaluation, to prevent, mitigate or remedy environmental damage or the consequences of environmental damage attributable to a site, including, but not limited to, the following activities: construction of diversion ditches; collection systems; drum removal; leachate collection systems; construction of fences or other barriers; installation of water filters; provision of alternative water systems; the removal of source areas; or plume control.*

1.2 Site Description

The site encompasses an area of about 3.98 acres (178,390 square feet) and comprises two trapezoidal-shaped lots and includes the northern and southwestern parts of Oak Street. Block 2567, Lot 1 (43-57 West Street; hereinafter referred to as the "northern lot"), is bordered by Noble Street to the north, West Street to the east, the southern part of Oak Street to the south, and the top of the riprap-stabilized shoreline of the East River to the west. Block 2570, Lot 36 (2-24 Oak Street, hereinafter referred to as the "southern lot"), is bordered by the northern part of Oak Street to the north, a parking lot and lumber facility to the east and south, and the top of the riprap-stabilized shoreline of the East River to the west. The elevation of the site varies from about el¹ 5 in the southwest to el 11 in the northeast. A site plan is provided as Figure 2.

The site is currently used for equipment storage including scaffolding, garbage containers, cranes, HVAC equipment, granite, and flatbed trucks. Improvements to the site include asphalt- and concrete-paved areas in the southern lot and eastern portion of the northern lot, and a riprap-stabilized shoreline along the East River. The site was previously occupied by five separate buildings that were demolished after a fire in 2006. The only remaining structure is an approximately 1,400-square-foot dilapidated masonry former coal silo located in the southwestern corner of the northern lot.

The USTs to be removed as part of this IRM Work Plan are located on Oak Street and a portion of the northern lot in the southwestern portion of the site. Petroleum impacts to be removed extend across the southern lot, northern lot and Oak Street.

¹ Elevations herein are in feet and referenced to the North American Vertical Datum of 1988 (NAVD88).

1.3 Redevelopment Plan

The purpose of the project is to develop an underutilized, contaminated parcel into a mixed-use residential and commercial development with open public spaces while implementing remedial measures that are protective of human health and the environment. The on-site development is anticipated to include four mixed-use buildings with towers ranging from 8 to 43 stories, open public space on the northern lot, and an esplanade along the East River.

1.4 Site History

The site is located in an area of historical industrial usage and has been used for manufacturing purposes since the late 1800s. Past uses of the site include a shipyard, manufacturing facility, a mill, and Greenpoint Terminal Corporation facility. Sanborn maps, dated 1905 and 1916, indicate oil tanks and an oil pump house in the northwest corner of the site. Sanborn maps from 1942 to 2007 indicate seven USTs beneath the western end of Oak Street. The USTs were uncovered and surveyed during the Remedial Investigation (RI) for the site.

Adjacent and surrounding properties were historically used for commercial and manufacturing purposes. Sanborn maps indicate surrounding properties were used for the Continental Iron Works, American Manufacturing Co., and a gasoline filling station.

1.5 Summary of Remedial Investigation Report Findings

Remedial investigation sampling was conducted between August 19 and December 14, 2015, in accordance with the NYSDEC-approved Remedial Investigation Work Plan (RIWP), to characterize the nature and extent of contamination at the site. The analytical results, findings, and conclusions of the RI were presented in the January 2016 draft RIR, which is undergoing NYSDEC review.

The RI consisted of the following:

1. Excavation to uncover the USTs and a survey of the tank extents;
2. Advancement of 23 soil borings (SB11 through SB33) and collection of 54 soil samples, including three duplicate samples;
3. Installation of 20 groundwater monitoring wells (MW11 through MW27, and MW31 through MW33) and collection of 21 groundwater samples, including two duplicate samples;
4. Installation of 12 soil vapor points (SV08 through SV19) and collection of 13 soil vapor samples, including one duplicate sample. An ambient air sample was also collected; and

5. Collection of six sediment samples from the East River site border, including one duplicate sample.

The findings and conclusions of the RIR are as follows:

1. Stratigraphy: Beneath the partial site surface cover (i.e., asphalt or concrete), overburden at the site includes a historic fill layer, which extends to a depth of about 6 feet below grade surface (bgs) throughout the majority of the site and to a maximum depth of about 10 feet bgs. The historic fill layer generally consists of light brown to brown fine- to medium-grained sand with varying amounts of gravel, brick, silt, concrete, asphalt, coal, slag, wood, and cobbles and/or boulders. Underlying the fill is light brown to tan fine- to medium-grained sand with trace silt and clay. Bedrock was not encountered during this investigation. Based on previous geotechnical investigations in the vicinity of the site, depth to bedrock is estimated at about 80 to 110 feet bgs.
2. Hydrogeology: Groundwater elevations recorded during the December 2013 Phase II ESI ranged from el 3.59 to el -0.28 feet or about 5 to 7 feet bgs. Groundwater elevations recorded during the RI sampling ranged from el 5.32 to el 0.53 feet or about 4 to 7 feet bgs. The groundwater elevation is highest in the eastern part of the site and appears to flow west toward the East River.
3. UST Investigation: The geophysical survey during the December 2013 Phase II ESI identified seven USTs, which are also indicated on the 1942 through 2006 Sanborn maps. A spill was reported to NYSDEC (Spill No. 1308069) on November 7, 2013 based on observation of LNAPL, petroleum-impacted soil, and an oily sheen on groundwater in the southwestern portion of the site (around the USTs primarily beneath Oak Street). Petroleum impacts are further described below. The USTs were uncovered and the UST extents were surveyed during the RI.
4. Soil Impacts:
 - a. Petroleum impacts were observed in the southwest portion of the site near the USTs (NYSDEC Spill No. 1308069). Petroleum-Impacted Soil – Grossly-impacted petroleum soil was observed in borings SB01, SB03, SB23, SB24, SB26, and SB27, and in test pits TP01, TP02, TP03, TP04, TP10, and TP12. In addition, soil with staining or odor was observed in borings SB21 test pit TP14. Volatile organic compounds (VOC) in petroleum-impacted soil did not exceed NYSDEC Unrestricted Use (UU) Soil Cleanup Objectives (SCO) and semivolatile organic compound (SVOC) concentrations were typical of historic fill concentrations (discussed below). VOCs in sediment samples along the East River shoreline

did not exceed UU SCOs and SVOC concentrations in sediment were not indicative of a petroleum release.

- b. Historic Fill – The historic fill layer contains concentrations of SVOCs, polychlorinated biphenyls (PCB), pesticides, and metals at concentrations that exceed their respective UU or Restricted Use Restricted-Residential (RURR) SCOs.
 - i. SVOCs were detected at concentrations above RURR SCOs within the fill layer throughout the site at levels considered typical of historic fill found in New York City, except for anomalously high concentrations, relative to the other site samples, in samples collected from boring SB06 and test pit TP16.
 - ii. PCB and pesticide concentrations were reported above UU SCOs, but below the RURR SCOs and are not considered contaminants of concern (COC).
 - iii. Metals were detected at concentrations above RURR SCOs within the fill layer throughout the site at concentrations typical of fill in New York City.
5. Groundwater Impacts: Groundwater was impacted with LNAPL and VOC, SVOC, and metal concentrations that exceeded NYSDEC Technical and Operational Guidance Series (TOGS) Class GA Ambient Water Quality Standards and Guidance Values (SGV).
 - a. Free product (LNAPL) was observed on groundwater in monitoring wells MW01 and MW03 and test pits TP01, TP03, TP10, and TP12 during the Phase II ESI and MW23, MW24, MW26, and MW27 during the RI. An oily sheen was observed on groundwater in test pits TP02, TP04, and TP14. The LNAPL was concentrated around the USTs and was delineated. Based on sediment samples collected from the East River and observations of the East River during the investigation, the LNAPL does not appear to be entering the East River.
 - b. Trichloroethene (TCE) was detected at a concentration above the Class GA SGV in one monitoring well, MW13, along the northern border of the site near Noble Street. The detection was less than an order of magnitude above the standard. No source of TCE was detected in site soil and the TCE source is likely off-site.
 - c. SVOCs were detected at concentrations exceeding Class GA SGVs in 8 of 24 groundwater samples. The exceeding sample locations were dispersed widely throughout the site, and are believed to be a result of entrained historic fill in

samples and not dissolved-phase contamination. SVOCs in groundwater are not COCs.

- d. Metals impacts to groundwater are generally consistent with regional groundwater quality and are not considered COCs.
6. Soil Vapor Impacts: Soil vapor sampling results indicate the presence of several VOCs including petroleum and chlorinated VOCs. Concentrations of chlorinated VOCs in soil vapor warrant monitoring and/or mitigation based on evaluation of the New York State Department of Health (NYSDOH) decision matrices.
7. Sufficient analytical data were gathered during the RI to establish site-specific soil cleanup levels and to develop a remedy for the site. The remedy will be described and evaluated in a Remedial Action Work Plan (RAWP) prepared in accordance with NYS BCP guidelines. The remedy will need to address petroleum impacts, historic fill impacted with metals and SVOCs, the potential for soil vapor intrusion from petroleum and chlorinated VOCs, and the removal and closure of USTs.

More details of the RI, including sample location and results maps, can be found in the Draft RIR provided under separate cover. NYSDEC requested additional sampling east of the LNAPL plume to be incorporated into an updated Draft RIR. This additional investigation occurred in August 2016.

2.0 QUALITATIVE HUMAN AND FISH/WILDLIFE EXPOSURE ASSESSMENT

Human health exposure risk was evaluated for both current and future site and off-site conditions, in accordance with the May 2010 NYSDEC Final DER-10 Technical Guidance for Site Investigation and Remediation. The assessment includes an evaluation of potential sources and migration pathways of contamination, potential receptors, exposure media, and receptor intake routes and exposure pathways.

In addition to the human health exposure assessment, NYSDEC DER-10 requires an on-site and off-site Fish and Wildlife Resources Impact Analysis (FWRIA) if certain criteria are met. Based on the requirements stipulated in Section 3.10 and Appendix 3C of DER-10, a FWRIA was not needed. The completed DER-10 Appendix 3C form is included as Appendix J.

2.1 Current Conditions

The site comprises two trapezoidal-shaped lots separated by Oak Street and encompasses an approximate area of 178,390 square feet (3.98 acres). The site is currently used for equipment storage, including scaffolding, garbage containers, cranes, HVAC equipment, granite, and flatbed trucks. Improvements to the site include asphalt- and concrete-paved areas in the southern lot and eastern portion of the northern lot, and a riprap-stabilized shoreline along the East River. The site was previously occupied by five separate buildings that were demolished after a fire in 2006. The only remaining structure is an approximately 1,400-square-foot, dilapidated former coal silo located in the southwestern corner of the northern lot.

2.2 Proposed Conditions

The proposed development includes remediation of the site and construction of four mixed-use residential and commercial buildings with towers ranging from 8 to 43 stories.

The remediation will be described in a RAWP, but is roughly anticipated to include:

- Removal and administrative closure of seven UST and related piping;
- Excavation and off-site disposal of grossly-impacted soil;
- Recovery of LNAPL from groundwater;
- Demolition of the existing coal silo and remnants from former buildings; and
- Implementation of remedial elements, as required, concurrent with development.

Proposed development plans are provided in Appendix A.

2.3 Summary of Environmental Conditions

Soil sample analysis revealed SVOCs, metals, pesticides, and PCBs at concentrations that exceeded their respective UU SCOs; SVOC and metal concentrations also exceed RURR SCOs in the historic fill layer. Historic fill material is present at depths ranging from surface grade to about 10 feet bgs. SVOC and metal concentrations were observed in the range of typical concentrations found in New York City historic fill, except for two locations represented by SB06 and TP16, where atypical concentrations were found. Petroleum-related soil impacts (e.g., black staining, petroleum-like odors, LNAPL) were observed in the southwestern portion of the site near the seven USTs, extending to a maximum depth of 10 feet bgs. Considering the proposed use, soil COCs include petroleum, SVOCs and metals.

Groundwater samples had concentrations of VOCs, SVOCs, metals, and dissolved metals that exceeded their respective NYSDEC TOGS SGVs. TCE was detected above the NYSDEC Class GA SGV in the sample collected from monitoring well MW13. SVOC exceedances in groundwater were attributes to entrained sediment in turbid samples. Dissolved metals were detected at concentrations above the NYSDEC TOGS SGVs throughout the site, but are consistent with regional groundwater conditions. LNAPL was detected in monitoring wells MW01, MW03, MW23, MW24, MW26, and MW27, and test pits TP01, TP03, TP10, TP12, and TP14. The groundwater COCs are LNAPL and TCE.

Several VOCs, including petroleum-related and solvent-related VOCs, were detected in soil vapor samples. Soil vapor results were evaluated using the NYSDOH decision matrices, and mitigation is recommended based on the concentrations of carbon tetrachloride, TCE, and 1,1,1-trichloroethane (1,1,1-TCA). The soil vapor COCs are carbon tetrachloride, TCE, and 1,1,1-TCA.

2.4 Conceptual Site Model

A conceptual site model (CSM) has been developed based on the findings of the RI. The purpose of the conceptual site model is to develop a simplified framework for understanding the distribution of impacted materials, potential migration pathways, and potentially complete exposure pathways, as discussed below.

2.4.1 Potential Sources of Contamination

Potential sources of contamination have been identified in Section 3.4 and include historic fill, the spill associated with the seven USTs, and historic site and off-site uses. The historic fill and historic site use is likely a source of SVOCs and metals in soil. The USTs (NYSDEC Spill No. 1308069) are a source of petroleum-related impacts to soil, soil vapor and groundwater in the southwestern corner of the site. VOC impacts to groundwater and soil vapor likely occurred

as a result of the use of solvents during historic use on adjacent or surrounding properties. No soil samples collected during investigations at the Site had concentrations of CVOCs above their respective UU SCOs.

2.4.2 Exposure Media

The impacted media include soil, groundwater, and soil vapor. Analytical data indicates that the soil is contaminated with SVOCs, metals, pesticides and PCBs. Groundwater impacts include VOCs, SVOCs, and metals. Soil vapor is impacted by VOCs.

2.4.3 Receptor Populations

The site is currently used for storage of equipment, including scaffolding, garbage containers, cranes, HVAC equipment, granite, and flatbed trucks. Access is limited to the current workers, authorized guests, and consultants investigating environmental conditions on the site. During site development, human receptors will be limited to construction and remediation workers, authorized guests visiting the site and the public adjacent to the site. Under future conditions, receptors will include the new building tenants, workers, and visitors to the residential properties, including children.

2.5 Potential Exposure Pathways – On-Site

2.5.1 Current Conditions

The site is currently improved with partial asphalt- and concrete-paved areas in the southwestern and eastern sections (about 50% of the site) with some additional areas covered with gravel and/or soil. Typical site activities are limited to industrial-type storage with deliveries dropped off and picked up intermittently, but not full-time occupancy. Workers accessing the site on this limited basis do not perform ground intrusive activities and exposure pathways through dermal absorption, inhalation, and ingestion are avoided.

Groundwater in this area of New York City is not used as a potable water source. There is a potential exposure pathway during groundwater sampling associated with site investigation. The potential pathway is through dermal absorption, inhalation and ingestion.

As there are no buildings on the site, accumulation of impacted soil vapor is not anticipated.

2.5.2 Construction/Remediation Condition

Construction and remediation may result in potential exposures to Site contaminants in the absence of a health and safety plan (HASP) and a Community Air Monitoring Plan (CAMP). Construction and remedial activities include demolition (of the concrete silo), excavation and off-site disposal of impacted soil, and construction of foundation components. In the absence

of a HASP and CAMP, this scenario presents the potential for exposure to soil COCs by construction and remediation workers via dermal absorption, ingestion, and inhalation of vapors and particulate matter.

Groundwater may be encountered during excavation by workers, and there is potential for exposure to groundwater COCs, in the absence of a HASP, to construction workers via dermal absorption, ingestion, or inhalation.

Soil vapor results indicated the presence of petroleum-related and chlorinated VOCs. In the absence of a HASP, workers may be exposed to soil vapor COCs via inhalation during construction. In the absence CAMP, activities may also result in exposure to the public adjacent to the Site through volatilization of vapors into the air and potential off-site migration.

2.5.3 Proposed Future Conditions

The proposed development will include residential, commercial and recreational uses. Upon completion of the new development, the entire site will be capped with a concrete building foundation, by asphalt/pavement or by landscaped areas covered with at least two feet of clean imported fill. There is no risk of ingesting groundwater COCs because the site and surrounding areas will continue to obtain their drinking water supply from surface water reservoirs located upstate and not from groundwater. Considering this, there are no potential pathways for soil and groundwater impacts.

In the absence of engineering controls (e.g., vapor mitigation system and/or ventilated parking garage), the presence of VOCs in the soil vapor creates potential for VOCs to intrude and accumulate in proposed site buildings, which would be an inhalation exposure pathway for future users.

2.6 Potential Exposure Pathways – Off-Site

In the absence of CAMP and a HASP, soil has the potential to be transported off-site by wind in the form of dust or on the vehicle or equipment tires leaving the site during development and remediation activities and create an exposure pathway to the off-site public. Under future conditions, the site soil would be capped by buildings, surface cover and clean soil. Groundwater flows to the adjoining East River, rather than towards the adjoining neighborhood, which precludes a complete exposure pathway for groundwater to the public adjacent to the site. In addition, groundwater in this area of New York City is not used as a source of drinking water.

2.7 Evaluation of Human Health Exposure

Based on the CSM and the review of environmental data, complete on-site exposure pathways appear to be present, in the absence of institutional and engineering controls, in current, construction and remediation, and future conditions. The complete exposure pathways indicate there is a risk of exposure to humans from site contaminants via exposure to soil, groundwater, and soil vapor if institutional and engineering controls are not implemented.

Complete exposure pathways have the following five elements: 1) a contaminant source; 2) a contaminant release and transport mechanism; 3) a point of exposure; 4) a route of exposure; and 5) a receptor population. A discussion of the five elements comprising a complete pathway as they pertain to the Site is provided below.

2.7.1 Current Conditions

Contaminants include the following: 1) historic fill with varying levels of SVOCs, metals, pesticides, and PCBs; 2) petroleum and USTs; 3) a CVOC in groundwater; and 4) CVOCs in soil vapor. Contaminant release and transport mechanisms include contaminated soil transported as dust, contaminated groundwater flow and volatilization of contaminants from the soil and groundwater matrices to the soil vapor phase, and existing soil vapor contaminants.

The site is currently used by tenants for industrial-type equipment storage. Workers are intermittently on site operating forklifts for loading and unloading of deliveries. Loading and unloading activities are primarily in the concrete or asphalt-paved areas, time on site is limited, and work is not ground intrusive; therefore, potential exposure is avoided. Under current conditions, a complete exposure pathway for investigation workers, completing ground intrusive sampling, exists due to subsurface soil, groundwater and soil vapor sampling. However, the risk is avoided or minimized by applying appropriate health and safety measures and implementing a HASP during site investigation activities. Groundwater is not accessible and is not used as a potable water supply in this area of New York City. The site property is kept locked and activity is limited to authorized guests.

In accordance with a HASP and CAMP, measures such as conducting an air-monitoring program, donning personal protective equipment (PPE), and applying vapor and dust suppression measures to prevent off-site migration of contaminants will be implemented as required. Such measures would prevent completion of potential migration pathways.

Under current conditions, there are no occupied structures on-site where soil vapor could potentially accumulate.

2.7.2 Construction/Remediation Activities

During development and remediation, points of exposure include disturbed and exposed soil during excavation, dust and organic vapors generated during excavation, and contaminated groundwater that will be encountered during excavation and dewatering operations. Routes of exposure include ingestion and dermal absorption of contaminated soil and groundwater, inhalation of organic vapors arising from contaminated soil and groundwater, and inhalation of dust arising from contaminated soil disturbance. The receptor population includes the construction and remediation workers, trespassers and, to a lesser extent, the public adjacent to the site.

The potential for completed exposure pathways is present because all five elements exist; however, the risk can be avoided or minimized by applying appropriate health and safety measures during construction and remediation, such as monitoring the air for organic vapors and dust, using vapor and dust suppression measures, cleaning truck undercarriages before they leave the Site to prevent off-site soil tracking, maintaining Site security, and wearing the appropriate PPE.

In accordance with a HASP, a Soil/Materials Management Plan (SoMP), and a CAMP, measures such as conducting an air-monitoring program, donning PPE, covering soil stockpiles, altering work sequencing, maintaining a secure construction entrance, proper housekeeping, and applying vapor and dust suppression measures to prevent off-site migration of contaminants during construction will be implemented. Such measures will prevent completion of these potential migration pathways.

2.7.3 Proposed Future Conditions

For the proposed future conditions, some residual contaminants may remain on-site, depending on the remedy, and would, to a lesser extent, include those listed under current conditions. Contaminant release and transport mechanisms include volatilization of contaminants from the groundwater matrix to the soil vapor phase.

If institutional and/or engineering controls are not implemented, points of exposure include permeation of soil vapor through the concrete slab of the proposed development, and exposure during any future soil-disturbing activities. Routes of exposure may include inhalation of vapors entering the building. The receptor population includes the building tenants, residential property employees, visitors and maintenance workers.

The possible routes of exposure can be avoided or mitigated by removal of contaminant sources during remediation, installation of soil vapor mitigation measures (e.g., vapor barrier

and/or ventilated parking garage), construction and maintenance of a site capping system (e.g., impervious surface cover or at least two feet of clean imported soil) and implementation of a Site Management Plan.

2.7.4 Human Health Exposure Assessment Conclusions

1. Under current conditions, the primary exposure pathways are for dermal contact, ingestion and inhalation of soil by site investigation workers. The exposure risks can be avoided or minimized by following the appropriate health and safety and vapor and dust suppression measures.
2. In the absence of institutional and engineering controls, there are potential pathways of exposure during the construction and remediation activities. The primary exposure pathways are:
 - a. Dermal contact, ingestion and inhalation of contaminated soil, groundwater or soil vapor by construction workers.
 - b. Dermal contact, ingestion and inhalation of soil (dust) and inhalation of soil vapor by the nearby community in the vicinity of the site.

These can be avoided or minimized by performing community air monitoring and by following the appropriate health and safety, vapor and dust suppression and site security measures.

3. The existence of a complete exposure pathway for site contaminants to human receptors during proposed future conditions is unlikely, as: 1) a large quantity of contaminated soil will be excavated and transported to an off-site disposal facility; 2) whatever residual soil remains will be capped with an impermeable cover or two feet of clean soil; 3) groundwater is not used as a potable water source in New York City; and 4) the potential pathway for soil vapor intrusion into the building would be addressed through the use of soil vapor mitigation measures.
4. It is unlikely that a complete exposure pathway exists for the migration of site contaminants to off-site human receptors for current, construction phase, or future conditions. Monitoring and control measures will be used during investigation and construction to prevent completion of this pathway. Under future conditions, the site will be remediated and engineering and institutional controls will be implemented to prevent completion of this pathway.

3.0 SUMMARY OF INTERIM REMEDIAL MEASURE

The proposed IRM consists of the following tasks:

- Decommissioning and removal of seven registered (PBS No. 2-612246) USTs and update of the NYSDEC PBS registration status;
- Excavation, to the extent practicable, to remove grossly impacted petroleum material;
- Removal of residual LNAPL from the open excavation;
- Demolition of a vacant masonry structure located north of the UST area to allow for additional removal of LNAPL and excavation of petroleum-impacted material;
- Collection of documentation soil samples from the base and sidewalls of all excavations;
- Backfilling of excavations, as necessary;
- Installation of three monitoring wells after excavation is complete for continued monitoring and potential recovery of residual LNAPL; and
- Closure of NYSDEC Spill No. 13-08069.

Demolition of the vacant masonry structure cannot be completed until a permit is obtained from the Department of Buildings, which can take several months; therefore, the excavation and LNAPL recovery will be completed in two phases. The first phase will include the southern lot and other areas within the plume that can be excavated without undermining the structure. An estimated IRM schedule is provided in Appendix A. Proposed changes, delays, or deviations will be promptly reported to the NYSDEC.

The IRM described herein will be performed in accordance with applicable federal, state, and city regulations. A Construction Health and Safety Plan (CHASP) and Community Air Monitoring Plan (CAMP) will be implemented during the IRM. A CHASP is provided as Appendix B and the CAMP is provided as Appendix C.

3.1 Objectives and Rationale

The objective of the IRM is to initiate the immediate removal of contaminant sources and source material and thereby mitigate potential plume migration. The proposed IRM will prevent additional environmental impacts to site media (soil, groundwater, and soil vapor) through removal of the USTs, LNAPL, and petroleum-impacted material (to the extent practicable). The proposed IRM will also simultaneously prepare the southern lot for use by a new, temporary, commercial or industrial tenant and aid in the development of a final remedy.

3.1.1 Site Preparation

The site will be prepared by the Contractor for implementation of the proposed IRM. Activities to be performed by the Contractor will include, but are not limited to, the establishment of work zones, addition of support facilities, construction of decontamination facilities, installation of erosion and sediment controls, and implementation of site security measures (i.e., erection of security fencing or barriers around work zones and staging areas). The contractor will ensure that soil erosion and sediment control measures are in operation prior to the commencement of, and during all work operations contained in the proposed IRM.

Prior to intrusive activities, Dig Safely New York (811) will be contacted by the Contractor a minimum of three business days in advance of the work. Dig Safely New York will be informed of the nature of the work and the intent to perform excavation. The excavation will be sloped and sheeted as necessary to protect the adjacent shoreline to the west.

3.1.2 IRM Phase I – UST Removal and Remediation

During the first phase of the IRM, seven USTs located in the southwestern portion of the site and associated piping will be removed. If additional unknown USTs are encountered, they will be decommissioned and removed. Removal of the USTs will be performed in accordance with NYSDEC CP-51 Soil Cleanup Guidance and other applicable NYSDEC UST closure requirements. Following removal of USTs, the USTs will be registered and closed in the NYSDEC PBS database and FDNY affidavits of closure will be obtained by a licensed UST Installer/Remover.

Upon completion of UST removals, excavations will be inspected for the presence of petroleum-impacted soil and groundwater. LNAPL observed in the vicinity of the UST excavations will be removed using vacuum methods (or methods selected by the Contractor and approved by the Remediation Engineer [RE] in conjunction with NYSDEC) and characterized and disposed of off-site in accordance with all applicable regulations at a permitted disposal facility. Grossly impacted petroleum soil will be excavated, to the extent practicable, characterized and disposed of off-site in a likewise manner. Support of excavation to facilitate the contaminated material removal is expected to consist of a sheeting and shoring system (e.g., sheet pile wall, soldier piles and lagging, etc.) along the western portion of the excavation area abutting the riprap, and sloping along the rest of the excavation perimeter. For the purposes of the IRM, in the context of excavation the phrase “to the extent practicable” will mean that:

- the adjacent masonry structure foundation and the riprap-stabilized shoreline will not be damaged or put at risk;

- the excavation shall not extend outside of the property line;
- excavation will extend to a maximum of 1 to 2 feet below the water table.

Well point dewatering is not planned, but excess product with water accumulated within the excavation will be removed with sorbent materials and via vacuum truck as required and disposed of off-site. The proposed excavation extents are shown on Figure 3.

3.1.3 Building Demolition

Pending necessary approvals (i.e., Department of Buildings and NYSDEC Wetlands), the dilapidated building along the East River will be demolished by a licensed contractor. Demolition work will be done in accordance with applicable regulations. Concrete from above grade portions of this demolition will be crushed on-site and used as backfill, excluding visibly petroleum impacted material (if encountered). Concrete crushing procedures will be provided to NYSDEC in a forthcoming memo for approval by the Regional Materials Management Engineer. Specific crushing procedures will be provided to NYSDEC for approval prior to crushing. Below-ground concrete and masonry that is in contact with impacted site soil will be shipped off-site.

3.1.4 IRM Phase II – Remediation of Petroleum Impacts on Northern Lot

Following demolition of the masonry structure within the plume area, the Contractor will excavate additional grossly-impacted petroleum soil and recover LNAPL in areas previously inaccessible, to the extent practical. Upon completion of the excavations, the area will be inspected for the presence of LNAPL. LNAPL will be removed using vacuum methods (or methods selected by the Contractor and approved by the RE in conjunction with NYSDEC), characterized and disposed of off-site in accordance with all applicable regulations at a permitted disposal facility. Grossly impacted petroleum soil will be excavated, to the extent practicable, characterized and disposed off-site in a likewise manner. The proposed excavation extents are shown on Figure 3.

3.1.5 Post-Excavation Documentation Sampling

Post-excavation documentation samples will be collected from excavation sidewalls and bottom. A minimum of one sample per 30 linear feet of sidewall and one sample per 900 square feet of excavation bottom will be collected, in accordance with NYSDEC DER-10. Documentation samples will be analyzed for VOCs and SVOCs, as listed in NYSDEC CP-51 Soil Cleanup Guidance.

Based on these criteria, up to about 13 base and 16 sidewall confirmation samples, plus required QA/QC samples, would be collected. Samples will be collected from areas with the

greatest apparent contamination as evidenced by odors, staining, and/or PID readings. A Quality Assurance Project Plan discussing sample collection and analysis is included as Appendix D. The proposed excavation extents and documentation sample locations are shown on Figure 3.

3.1.6 Excavation Backfill

Backfill required to restore the excavation area to original grade will be imported to the site and comply with Section 2.8. The excavation area will be backfilled to about el 7 to match surrounding site grade. A demarcation layer (e.g., orange snow fencing, geotextile fabric) will be installed at the base of the excavation to delineate the line between imported backfill material and residual contaminated soil.

3.1.7 Monitoring Well Installation

Existing RI monitoring wells within the excavation area will be decommissioned via removal during the IRM. Following completion of the IRM, new groundwater wells will be installed in the remediation area that will be used to monitor for potential residual petroleum product. Four 4-inch-diameter monitoring wells will be installed (one within the tank area and one each to the west, northwest, and north of the UST area (locations may be revised based on field observations during the IRM)). Current and proposed monitoring well locations are shown on Figure 4.

As a post-IRM contingency, if recoverable LNAPL accumulates in the new monitoring wells, recovery methods (i.e. absorbent socks) will be implemented in coordination with NYSDEC. Potential recovered petroleum and petroleum-impacted disposable equipment (e.g., absorbent socks/pads) will be containerized (e.g., 55-gallon drums), characterized and disposed of at a facility permitted to accept this type of waste.

3.2 Remedial Activity Oversight

The IRM implementation will be overseen by a field engineer, geologist, or scientist under the supervision of the Remediation Engineer (RE). The RE is responsible for documenting that the contractor performs the work as specified in the IRM Work Plan and provides the proper documentation required by NYSDEC. These contractor documents will be submitted to the NYSDEC in the Construction Completion Report (CCR); which is described in Section 3.0.

The RE will provide full-time oversight of the IRM activities. The activities that occur during the IRM will be properly documented in monthly BCP progress reports and in the CCR as described in Section 3.0.

3.3 Soil Screening Methods

Visual, olfactory and instrumental soil screening and assessment will be performed by a field engineer, geologist, or scientist during excavations into known or potentially-impacted material. Instrumental screening will be performed with a PID equipped with a 10.6 electron Volt (eV) bulb and will be calibrated daily.

3.4 Waste Characterization

Prior to or during excavation, waste characterization samples will be collected from the material to be disposed of off-site. This activity will be coordinated by the RE and overseen by a field engineer, geologist, or scientist under the supervision of the RE. A driller or excavation contractor will mobilize to the site to advance borings or test pits, and the field engineer will collect samples considered representative of the material requiring disposal at a frequency consistent with disposal facility requirements. Petroleum-impacted liquids and LNAPL will be sampled as required by the disposal facilities.

Waste characterization samples will be submitted to an NYSDOH ELAP-certified laboratory for analysis in accordance with the QAPP provided in Appendix D.

3.5 Stockpile Methods

Soil stockpile areas, as needed for the different soil materials, will be constructed for staging of site soil, pending loading or characterization testing. Separate stockpile areas will be constructed to avoid comingling materials of differing waste types. Any impacted source material will be directly loaded into trucks for off-site disposal or stockpiled temporarily. All stockpile areas will meet the following minimum requirements:

- The excavated soil will be placed onto a minimum 10-mil thickness, low-permeability liner of sufficient strength and thickness to prevent puncture during use; separate stockpiles will be created where material types are different (e.g., petroleum-impacted material stockpiled in a contaminated soil area). The use of multiple layers of thinner liners is permissible;
- Equipment and procedures will be used to place and remove the soil that will minimize the potential to jeopardize the integrity of the liner;
- Stockpiles will be covered at the designated times (see below) with minimum 6-mil plastic sheeting or tarps which will be securely anchored to the ground – Stockpiles will be routinely inspected and broken sheeting covers will be promptly replaced;

- Stockpiles will be covered upon reaching their capacity of approximately 1,000 cubic yards until ready for loading – Stockpiles that have not reached their capacity will be covered at the end of each workday;
- Active stockpiles will be covered at the end of each workday;
- Each stockpile area will be encircled with silt fences and hay bales, as needed to contain and filter particulates from any rainwater that has drained off the soils, and to mitigate the potential for surface water run-off; and
- The stockpile areas will be inspected daily and noted deficiencies will be promptly addressed. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by NYSDEC.
- Water will be available on-site at suitable pressure for use in dust control.

3.6 Material Load Out and Transport

Non-hazardous, petroleum-impacted material will be handled, transported and disposed by a licensed hauler in accordance with applicable 6 NYCRR Part 360, General Provisions and 6 NYCRR Part 364, Waste Transporter Permits regulations and other applicable federal, state and local regulations. The waste removal contractor will provide the appropriate permits, certifications, and written commitments from disposal facilities to accept the material throughout the duration of the project. Petroleum-impacted material will be transported by a waste removal contractor who possesses a valid New York State Part 364 Waste Transporter Permit. Waste manifests will be used to track the material that is transported off-site. Haulers will be appropriately licensed and trucks will be properly placarded.

The RE will oversee the load-out of excavated material. Once the loading of a container, dump truck, or trailer has been completed, the material will be transported to the approved off-site disposal facility. Loaded vehicles leaving the site will be appropriately lined, securely covered, and tracked using a manifest system, in accordance with appropriate federal, state, local, and New York State Department of Transportation (NYSDOT) requirements (or other applicable transportation requirements), prior to leaving the site. If loads contain wet material capable of producing free liquid, free liquids will be stabilized prior to shipping off-site. A truck wash/cleaning area will be operated on-site, if necessary. The RE will be responsible for documenting that all outbound trucks will be washed/cleaned at the truck wash before leaving the site until the interim remedial action is complete. Truck wash waters impacted with petroleum will be collected and disposed of off-site in an appropriate manner. Locations where vehicles enter or exit the site shall be inspected daily for evidence of off-site sediment tracking.

Proposed in-bound and out-bound truck routes and proposed controlled construction entrance to work area are shown on Figure 5.

Proposed in-bound and out-bound truck routes to the Site are shown in Figure 5. This is the most appropriate route and takes into account: (a) limiting transport through residential areas and past sensitive sites; (b) use of city mapped truck routes; (c) prohibiting off- Site queuing of trucks entering the facility; (d) limiting total distance to major highways; (e) promoting safety in access to highways; and (f) overall safety in transport; [(g) community input [where necessary]]

Trucks will be prohibited from stopping and idling in the neighborhood outside the project Site.

Egress points for truck and equipment transport from the Site will be kept clean of dirt and other materials during Site remediation and development.

To the extent practical, queuing of trucks will be performed on-Site in order to minimize off-site disturbance. Off-Site queuing for idling trucks will be prohibited.

3.7 Material Off-Site Disposal

The RE will review submittals for proposed disposal facilities before any materials leave the site to document that the facility has the proper permits and to review their acceptance requirements. The following documentation will be obtained and reported by the RE for each disposal location used in this project to fully demonstrate and document that disposal of material derived from the site conforms to all applicable laws:

- 1) A letter from the RE or BCP Volunteer to the receiving facility describing the material to be disposed of and requesting formal written acceptance of the material. This letter will state that material to be disposed of is contaminated material generated at an environmental remediation site in New York State. The letter will provide the project identity and the name and phone number for the RE. The letter will include as an attachment a summary of all chemical data for the material being transported (include site characterization data); and
- 2) A letter from each receiving facility stating it is in receipt of the correspondence described above and is approved to accept the material. These documents will be included in the FER.

The quantity of material expected to be disposed off-site is estimated at about 3,000-3,500 cubic yards.

All soil/fill/solid waste excavated and removed from the Site will be treated as contaminated and regulated material and will be disposed in accordance with all local, State (including 6NYCRR Part 360) and Federal regulations. If disposal of soil/fill from this Site is proposed for unregulated disposal (i.e. clean soil removed for development purposes), a formal request with an associated plan will be made to NYSDEC's Project Manager. Unregulated off-site management of materials from this Site is prohibited without formal NYSDEC approval.

Material that does not meet Track 1 unrestricted SCOs is prohibited from being taken to a New York State recycling facility (6NYCRR Part 360-16 Registration Facility).

Non-hazardous historic fill and contaminated soils taken off-site will be handled, at minimum, as a Municipal Solid Waste per 6NYCRR Part 360-1.2

Historical fill and contaminated soils from the Site are prohibited from being disposed at Part 360-16 Registration Facilities (also known as Soil Recycling Facilities).

Soils that are contaminated but non-hazardous and are being removed from the Site are considered by the Division of Materials Management (DMM) in NYSDEC to be Construction and Demolition (C/D) materials with contamination not typical of virgin soils. These soils may be sent to a permitted Part 360 landfill. They may be sent to a permitted C/D processing facility without permit modifications only upon prior notification of NYSDEC Region 2 DMM. This material is prohibited from being sent or redirected to a Part 360-16 Registration Facility. In this case, as dictated by DMM, special procedures will include, at a minimum, a letter to the C/D facility that provides a detailed explanation that the material is derived from a DER remediation Site, that the soil material is contaminated and that it must not be redirected to on-site or off-site Soil Recycling Facilities. The letter will provide the project identity and the name and phone number of the Remedial Engineer. The letter will include as an attachment a summary of all chemical data for the material being transported.

The Final Engineering Report will include an accounting of the destination of all material removed from the Site during this IRM, including excavated soil, contaminated soil, historic fill, solid waste, and hazardous waste, non-regulated material, and fluids. Documentation associated with disposal of all material must also include records and approvals for receipt of the material. This information will also be presented in a tabular form in the FER.

Bill of Lading system or equivalent will be used for off-site movement of non-hazardous wastes and contaminated soils. This information will be reported in the Final Engineering Report.

Hazardous wastes derived from on-site will be stored, transported, and disposed of in full compliance with applicable local, State, and Federal regulations.

Appropriately licensed haulers will be used for material removed from this Site and will be in full compliance with all applicable local, State and Federal regulations.

Waste characterization will be performed for off-site disposal in accordance with receiving facility requirements and in conformance with applicable permits. Sampling and analytical methods, sampling frequency, analytical results and QA/QC methods will be reported in the CCR upon completion of the IRM and in the Final Engineering Report (FER) upon completion of the final remedy. All data available for soil/material to be disposed at a given facility will be submitted to the disposal facility with suitable explanation prior to shipment and receipt.

3.8 Backfill Import and Placement

Import material used to backfill the excavations will comply with DER-10 Section 5.4(e). If soil is imported, it will be sampled in accordance with Table 5.4(e)4 - Reuse of Soil, and analytical results will comply with the concentrations listed in DER-10, Appendix 5, for Restricted Use – Restricted Residential and SVOC concentrations shall comply with Protection of Groundwater SCOs. Virgin gravel, rock or stone may be imported without sampling if it contains less than 10% by weight passing through a size 80 sieve, contains no material greater than 4 inches in diameter, and is sourced from a permitted or registered mine or quarry. Recycled concrete aggregate (RCA) may be imported without sampling if it contains less than 10% by weight passing through a size 80 sieve and is sourced from an NYSDEC Part 360 registered facility. RCA and gravel, rock or stone will not require chemical testing if the above-listed requirements are met. It is anticipated that only RCA will be used for backfill during the IRM. Prior to its use on site, documentation regarding the source(s) of imported fill material must be provided to the NYSDEC for approval.

Prior to its placement, imported material will be screened for evidence of contamination (visual, olfactory and instrument). Material from industrial sites, spill sites, other environmental remediation sites and/or other potentially impacted sites will not be imported to the site. The import material will also meet applicable structural fill requirements. All materials proposed for import onto the site will be approved by the RE and will be in compliance with provisions in this IRM Work Plan prior to receipt at the site.

The Construction Completion Report and/or Final Engineering Report will include the following certification by the Remedial Engineer: "I certify that all import of soils from off-site, including

source evaluation, approval and sampling, has been performed in a manner that is consistent with the methodology defined in the IRM Work Plan”.

A demarcation layer (e.g., orange snow fence, geotextile fabric) will be installed at the base of the excavation prior to backfilling to delineate the backfill material from the residual contaminated soil.

3.9 Dust, Odor, Vapor and Nuisance Control Plan

This dust, odor, organic vapor and nuisance control plan was developed in accordance with the NYSDOH Generic Community Air Monitoring Plan (CAMP) and Occupational Safety and Health Administration (OSHA) standards for construction (29 Code of Federal Regulations [CFR] 1926). Remediation and construction activities will be monitored for dust and odors by the RE’s field engineer, scientist, or geologist. Continuous monitoring on the perimeter of the work zones for odor, VOCs, and dust will be required for all ground intrusive activities, such as soil excavation and handling activities.

The work zone is defined as the general area in which machinery is operating in support of remediation activities. A PID will be used to monitor the work zone during UST removal and for periodic monitoring for VOCs during post-excavation soil sampling.

The site perimeter will be monitored for fugitive dust emissions by visual observations as well as instrumentation measurements. Particulate or dust will be monitored continuously with real-time field instrumentation that will meet, at a minimum, the performance standards from DER-10 Appendix 1B.

Action levels for site worker respiratory use are set forth in Section 6.0 of the CHASP, included in Appendix B. Action levels for the protection of the community and visitors are discussed below in Section 2.9.1, and in the CAMP, which is included in Appendix C.

3.9.1 Dust, Odor and Vapor Control

Work practices to minimize odors and organic vapors include limiting the time that the excavations remain open, wetting exposed fill or soil, minimizing stockpiling of impacted-source soil, and minimizing the handling of impacted material. Offending odor and organic vapor controls may include the application of foam suppressants or tarps over the odor or petroleum source areas. Foam suppressants may include biodegradable foams that are applied over the source material for short-term control of the odor. If nuisance odors are identified, work will be halted and the source of odors will be identified and corrected. Work will not resume until all nuisance odors have been abated. NYSDEC and NYSDOH will be notified of all odor events

and of all other complaints about the project. Implementation of all odor controls is the responsibility of the Remedial Contractor. Observance of non-compliance and issuance of halt of work orders is the responsibility of the Volunteer's Remedial Engineer, who is responsible for certifying the Final Engineering Report.

If odors develop and cannot be otherwise controlled, additional means to eliminate odor nuisances will include: (a) direct load-out of soils to trucks for off-site disposal; (b) use of chemical odorants in spray or misting systems; and, (c) use of staff to monitor odors in surrounding neighborhoods.

Where odor nuisances have developed during remedial work and cannot be corrected, or where the release of nuisance odors cannot otherwise be avoided due to on-site conditions or close proximity to sensitive receptors, odor control will be achieved by limiting the area of open excavations and application of covers to open excavations and stockpiles. If all else fails, sheltering excavation and handling areas under tented containment structures equipped with appropriate air venting/filtering systems will be considered.

VOCs will be monitored with a handheld PID in accordance with the CHASP and CAMP. If the action level is exceeded and adequate ventilation cannot be provided, work will cease and the potential affected portion of the work area will be evacuated until adequate mechanical ventilation can be implemented to control the hazard. Level C respiratory protection may be donned in accordance with the HASP if untrained personnel are not present and the action level is exceeded. The following actions will be taken based on VOC levels measured:

- If total VOC levels exceed 5 parts per million (ppm) above background for the 15-minute average at the perimeter, work activities will be temporarily halted and monitoring continued. If levels readily decrease (per instantaneous readings) below 5 ppm above background, work activities will resume with continued monitoring.
- If total VOC levels at the downwind perimeter of the hot zone persist at levels in excess of 5 ppm above background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps work activities will resume provided that the total organic vapor level 200 feet downwind of the hot zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less – but in no case less than 20 feet, is below 5 ppm above background for the 15-minute average.
- If the total VOC level is above 25 ppm at the perimeter of the hot zone, activities will be shut down.

The following actions will be taken based on visual observations and measured dust levels using a quantitative meter following minimum performance standards from DER-10 Appendix 1B:

- If the downwind particulate level is $100 \mu\text{g}/\text{m}^3$ greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression must be employed. Work may continue with dust suppression techniques provided that downwind PM10 levels do not exceed $150 \mu\text{g}/\text{m}^3$ above the background level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM10 levels are greater than $150 \mu\text{g}/\text{m}^3$ above the background level, work must be stopped and a re-evaluation of activities initiated. Work can resume provided that dust suppression measures and other controls are successful in reducing the downwind PM10 concentration to within $150 \mu\text{g}/\text{m}^3$ of the upwind level and in preventing visible dust migration.

This plan will be implemented to control emissions of VOCs and nuisance odors. Specific VOC and odor control methods to be used on a routine basis will include limiting the time that the excavations remain open, minimizing stockpiling of impacted-source soil, and minimizing the handling of impacted material. If nuisance odors or vapors exceeding action levels set forth in the IRM Work Plan are identified off-site, work will be halted and the source of odors will be identified and corrected. Work will not resume until all VOCs or nuisance odors have been abated. NYSDEC and NYSDOH will be notified of all odor and vapor events and of all other complaints about the project. Implementation of all odor and vapor controls, including the halting of work, will be the responsibility of the Remediation Contractor under the oversight of the RE, who is responsible for certifying the CCR.

3.10 Construction Health and Safety Plan

The RE prepared a site-specific CHASP for the IRM, which is included as Appendix B. The CHASP provides a mechanism for establishing on-site safe working conditions, safety organization, procedures, and personal protective equipment (PPE) requirements. The CHASP meets the requirements of 29 CFR 1910 and 29 CFR 1926 (which includes 29 CFR 1910.120 and 29 CFR 1926.65). The HASP includes, but is not limited to, the following components listed below:

- Organization and Identification of key personnel;
- Training requirements;

- Medical surveillance requirements;
- List of site hazards;
- Excavation safety;
- Work zone descriptions and monitoring procedures;
- Personal safety equipment and protective clothing requirements;
- Decontamination requirements;
- Standard operating procedures;
- Contingency Plan; and
- Material Safety Data Sheets.

3.11 Notification

The NYSDEC will be notified at least 7 calendar days prior to commencement of IRM-related work. A preconstruction meeting will be coordinated between the RE, the Remediation Contractor, and the NYSDEC. This meeting must be coordinated prior to the implementation of this IRM Work Plan.

4.0 REPORTING

Upon completion of the IRM, a CCR will be prepared and submitted to the NYSDEC. The RE responsible for certifying all reports will be an individual licensed to practice engineering in the State of New York; Jason J. Hayes, P.E. of Langan will have this responsibility. Should Mr. Hayes become unable to fulfill this responsibility, another suitably qualified New York State professional engineer will take his place. All project reports will be submitted to the NYSDEC electronically as PDFs. Laboratory analytical data for documentation samples will be submitted in an electronic data deliverable (EDD) format that complies with the NYSDEC's electronic data warehouse standards.

4.1 Daily Reports

Daily reports will be prepared for the project file and for review by the NYSDEC Project Managers. Daily reports will include:

- An update of progress made during the reporting day;
- Locations of work and quantities of material imported and exported from the site;
- References to map for site activities;
- A summary of any and all complaints with relevant details (names, phone numbers);
- A summary of CAMP findings, including excursions; and
- An explanation of notable site conditions.

Daily reports are not intended to be the mode of communication for notification to the NYSDEC of emergencies (accident, spill), requests for changes to the IRM Work Plan or other sensitive or time critical information; however, such conditions will also be included in the daily reports. Emergency conditions and changes to the IRM Work Plan will be addressed directly to the NYSDEC Project Managers via personal communication. If site conditions warrant, the RE may request to change from daily to weekly reports that include the above information.

4.2 Construction Completion Report

A CCR will be submitted to the NYSDEC Project Managers within 120 days of completing the IRM. The CCR will document the implementation of the IRM. The CCR will be incorporated into and referenced in the FER for the site when issued. The CCR will provide the following information:


1. The RE will certify that:

- a. Data generated was useable and met the remedial requirements;
 - b. The remedial work conformed to the IRM Work Plan;
 - c. Dust, odor, and vapor control measures were implemented during invasive work and conformed with the IRM Work Plan; and
 - d. Remediation waste was transported and disposed in accordance with the IRM Work Plan.
 - e. Source approval and sampling of imported acceptable fill (not anticipated) was completed in a manner consistent with the methodology of the IRM Work Plan;
2. Description of any problems encountered and their resolutions;
 3. Description of changes in the IRM from the elements provided in the IRM Work Plan and associated design documents and the reasons for them;
 4. Description of the deviations from the approved IRM Work Plan;
 5. Listing of waste streams, quantity of materials disposed, and where they were disposed;
 6. List of the remediation standards applied to the remedial actions;
 7. Documentation of NYSDEC PBS database registry and closure;
 8. Affidavits of closure submitted to FDNY for removed USTs;
 9. Description of source and quality of fill;
 10. A summary of residual impacted material left on the site;
 11. A tabular summary of sampling results and all material characterization results and other sampling and chemical analysis performed as part of the IRM;
 12. Written and photographic documentation of all remedial work performed under this remedy;
 13. Copies of the submitted progress reports;
 14. Manifests and bills of lading for excavated materials transported off-site;
 15. A log of the destination of material removed from the site, including excavated impacted soil, historic fill, solid waste, hazardous waste, non-regulated material, and fluids; and
 16. Documentation associated with disposal of material must also include records and approvals for receipt of the material.

5.0 CERTIFICATION


I Jason J. Hayes, P.E. certify that I am currently a NYS registered professional engineer as defined in 6 NYCRR Part 375 and that this Interim Remedial Measure Work Plan was prepared in accordance with all applicable statutes and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10).

I certify that all information and statements in this certification are true. I understand that a false statement made herein is punishable as Class "A" misdemeanor, pursuant to Section 210.45 of the Penal Law.

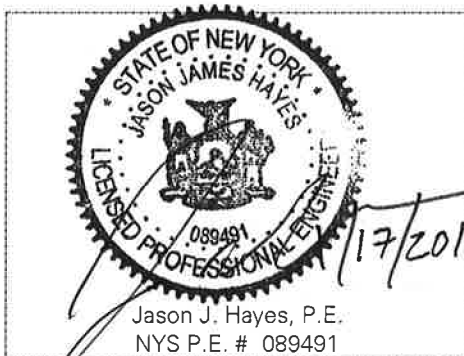

It is a violation of Article 145 of New York State Education Law for any person to alter this document in any way without the express written verification of adoption by any New York State licensed engineer in accordance with Section 7209(2), Article 145, New York State Education Law.


FIGURES

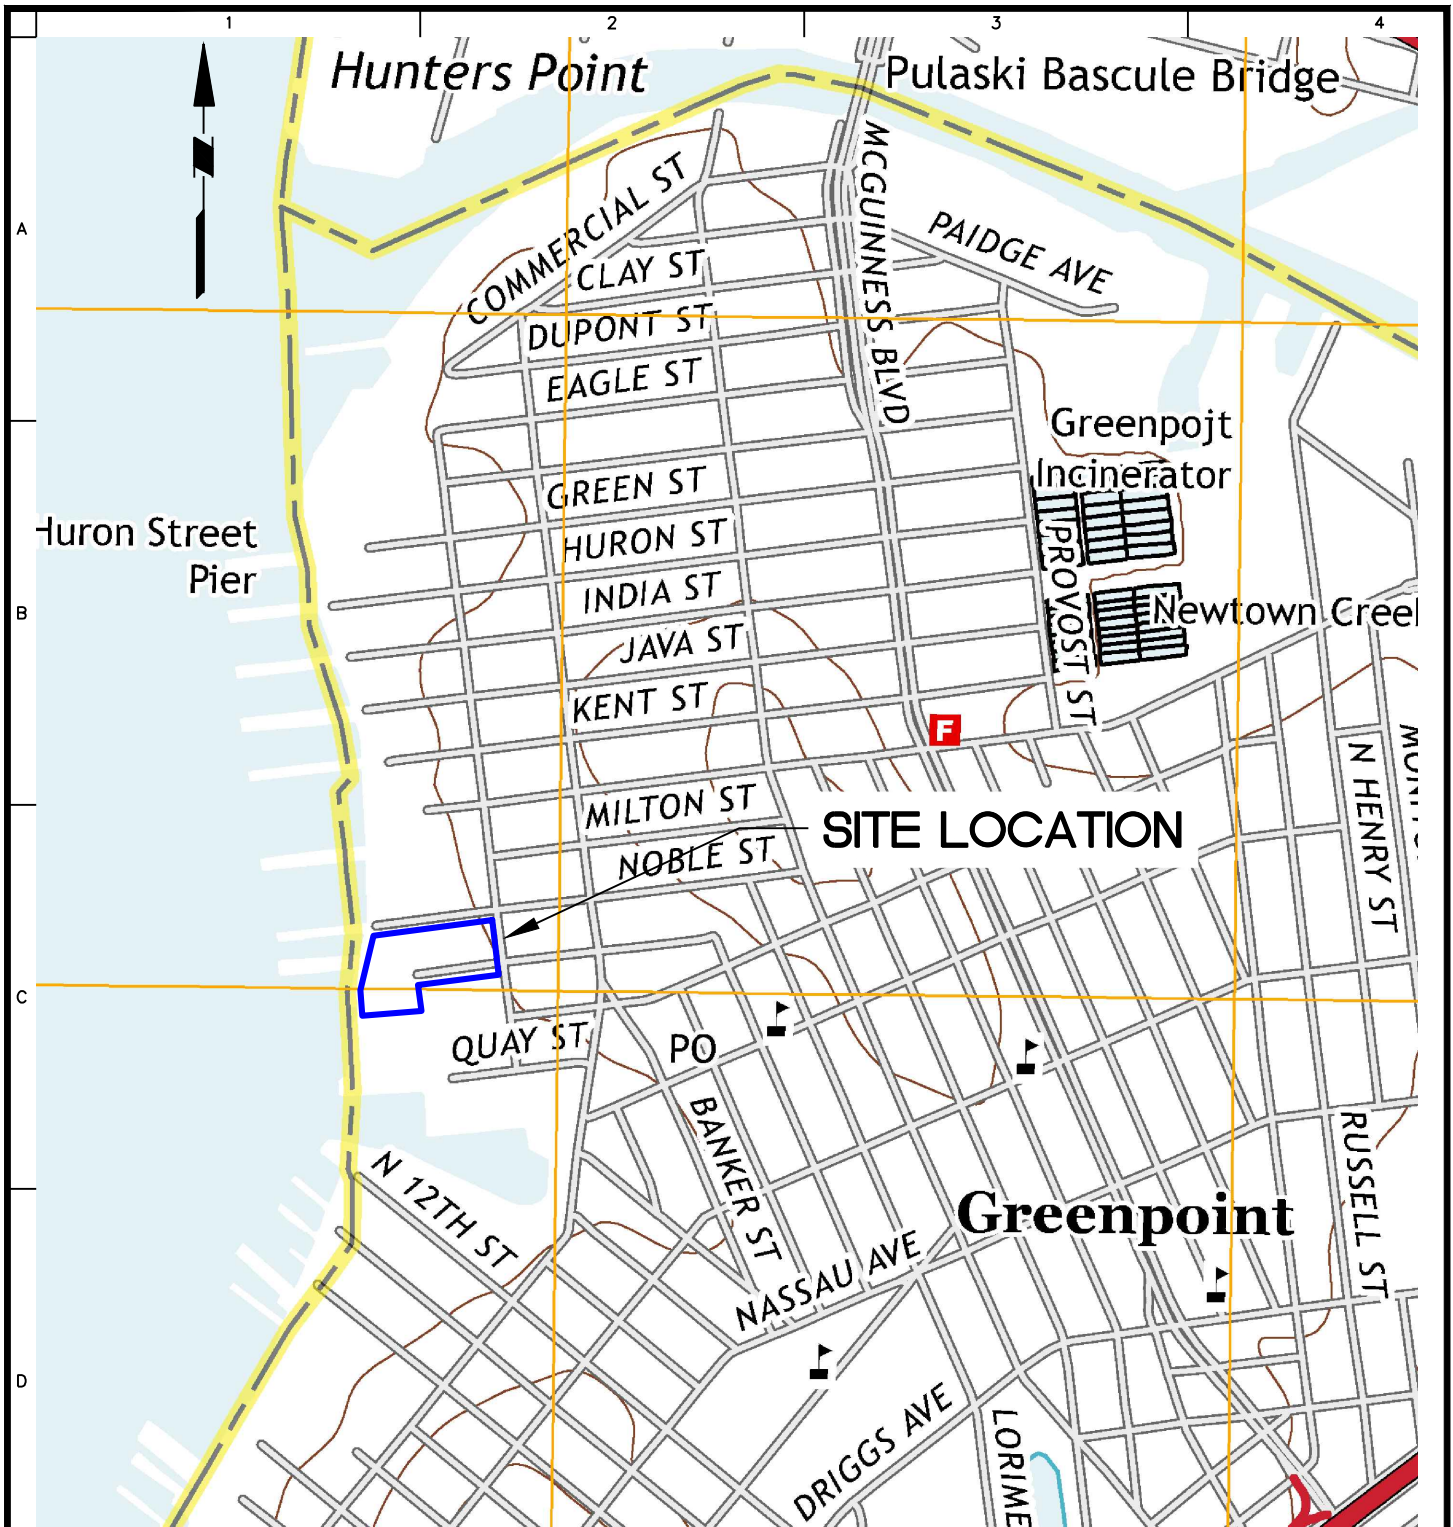

NOTES:

1. BASE MAP FROM USGS 7.5-MINUTE SERIES BROOKLYN QUADRANGLE, 2013.
2. WESTERN EXTENTS OF PROPERTY BOUNDARY EXTEND TO THE LANDWARD SIDE OF THE RIPRAP. RIPRAP LOCATION BASED ON DECEMBER 6, 2008 SURVEY BY LANGAN.

<p>21 Penn Plaza, 360 West 31st Street, 8th Floor New York, NY 10001 T: 212.479.5400 F: 212.479.5444 www.langan.com</p> <p>Langan Engineering, Environmental, Surveying and Landscape Architecture, D.P.C. Langan Engineering and Environmental Services, Inc. Langan CT, Inc. Langan International LLC Collectively known as Langan</p>	Project	Figure Title	Project No.	Figure No.	
	<p>GREENPOINT MARINA</p> <p>BLOCK No. 2567, LOT No. 1 BLOCK No. 2570, LOT No. 36 GREENPOINT</p> <p>BROOKLYN NEW YORK</p>	<p>SITE LOCATION MAP</p>	170267701	<p>1</p>	
			Date		06/28/2016
			Scale		NTS
Drawn By	Checked By	Submission Date	MLR JA	Sheet 1 of 5	

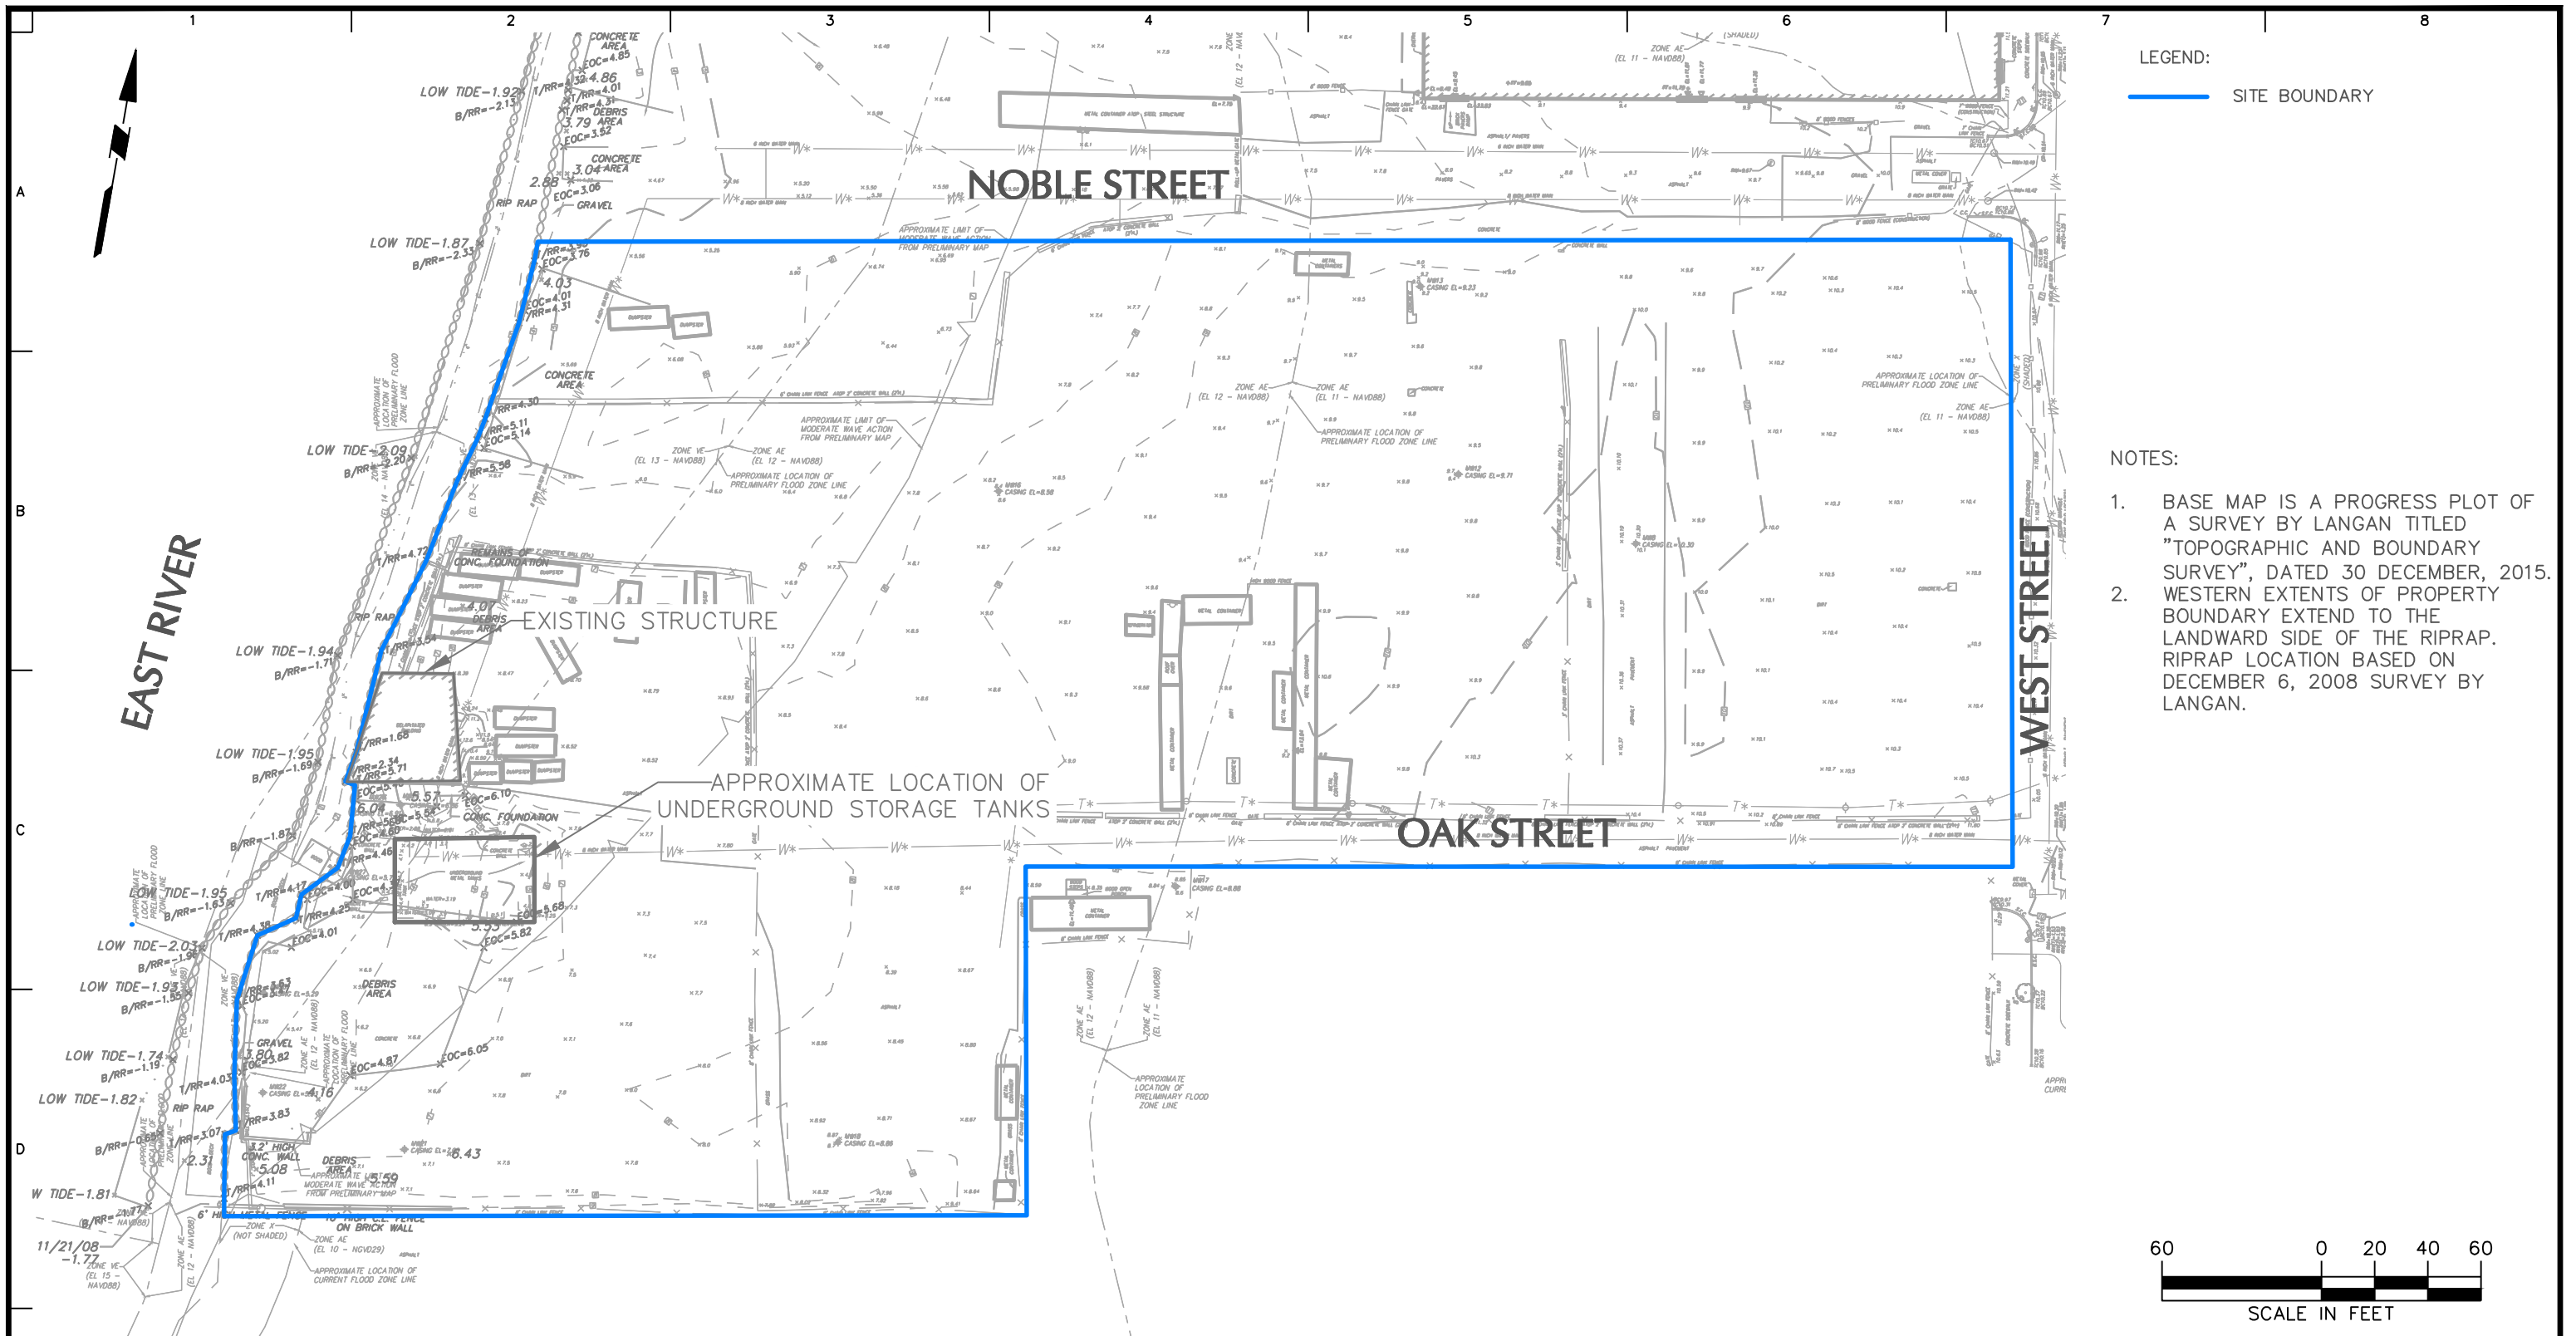

LEGEND:
— SITE BOUNDARY

- NOTES:
1. BASE MAP IS A PROGRESS PLOT OF A SURVEY BY LANGAN TITLED "TOPOGRAPHIC AND BOUNDARY SURVEY", DATED 30 DECEMBER, 2015.
 2. WESTERN EXTENTS OF PROPERTY BOUNDARY EXTEND TO THE LANDWARD SIDE OF THE RIPRAP. RIPRAP LOCATION BASED ON DECEMBER 6, 2008 SURVEY BY LANGAN.




LANGAN

21 Penn Plaza, 360 West 31st Street, 8th Floor
 New York, NY 10001
 T: 212.479.5400 F: 212.479.5444 www.langan.com
 Langan Engineering, Environmental, Surveying and
 Landscape Architecture, D.P.C.
 Langan Engineering and Environmental Services, Inc.
 Langan CT, Inc.
 Langan International LLC
 Collectively known as Langan

Project
GREENPOINT MARINA
 BLOCK No. 2567, LOT No. 1
 BLOCK No. 2570, LOT No. 36
 GREENPOINT
 BROOKLYN NEW YORK

Figure Title
SITE PLAN

Project No. 170267701	Figure No.
Date 03/09/2016	2
Scale 1" = 60'	
Drawn By PM	Checked By JA
Submission Date	Sheet 2 of 5

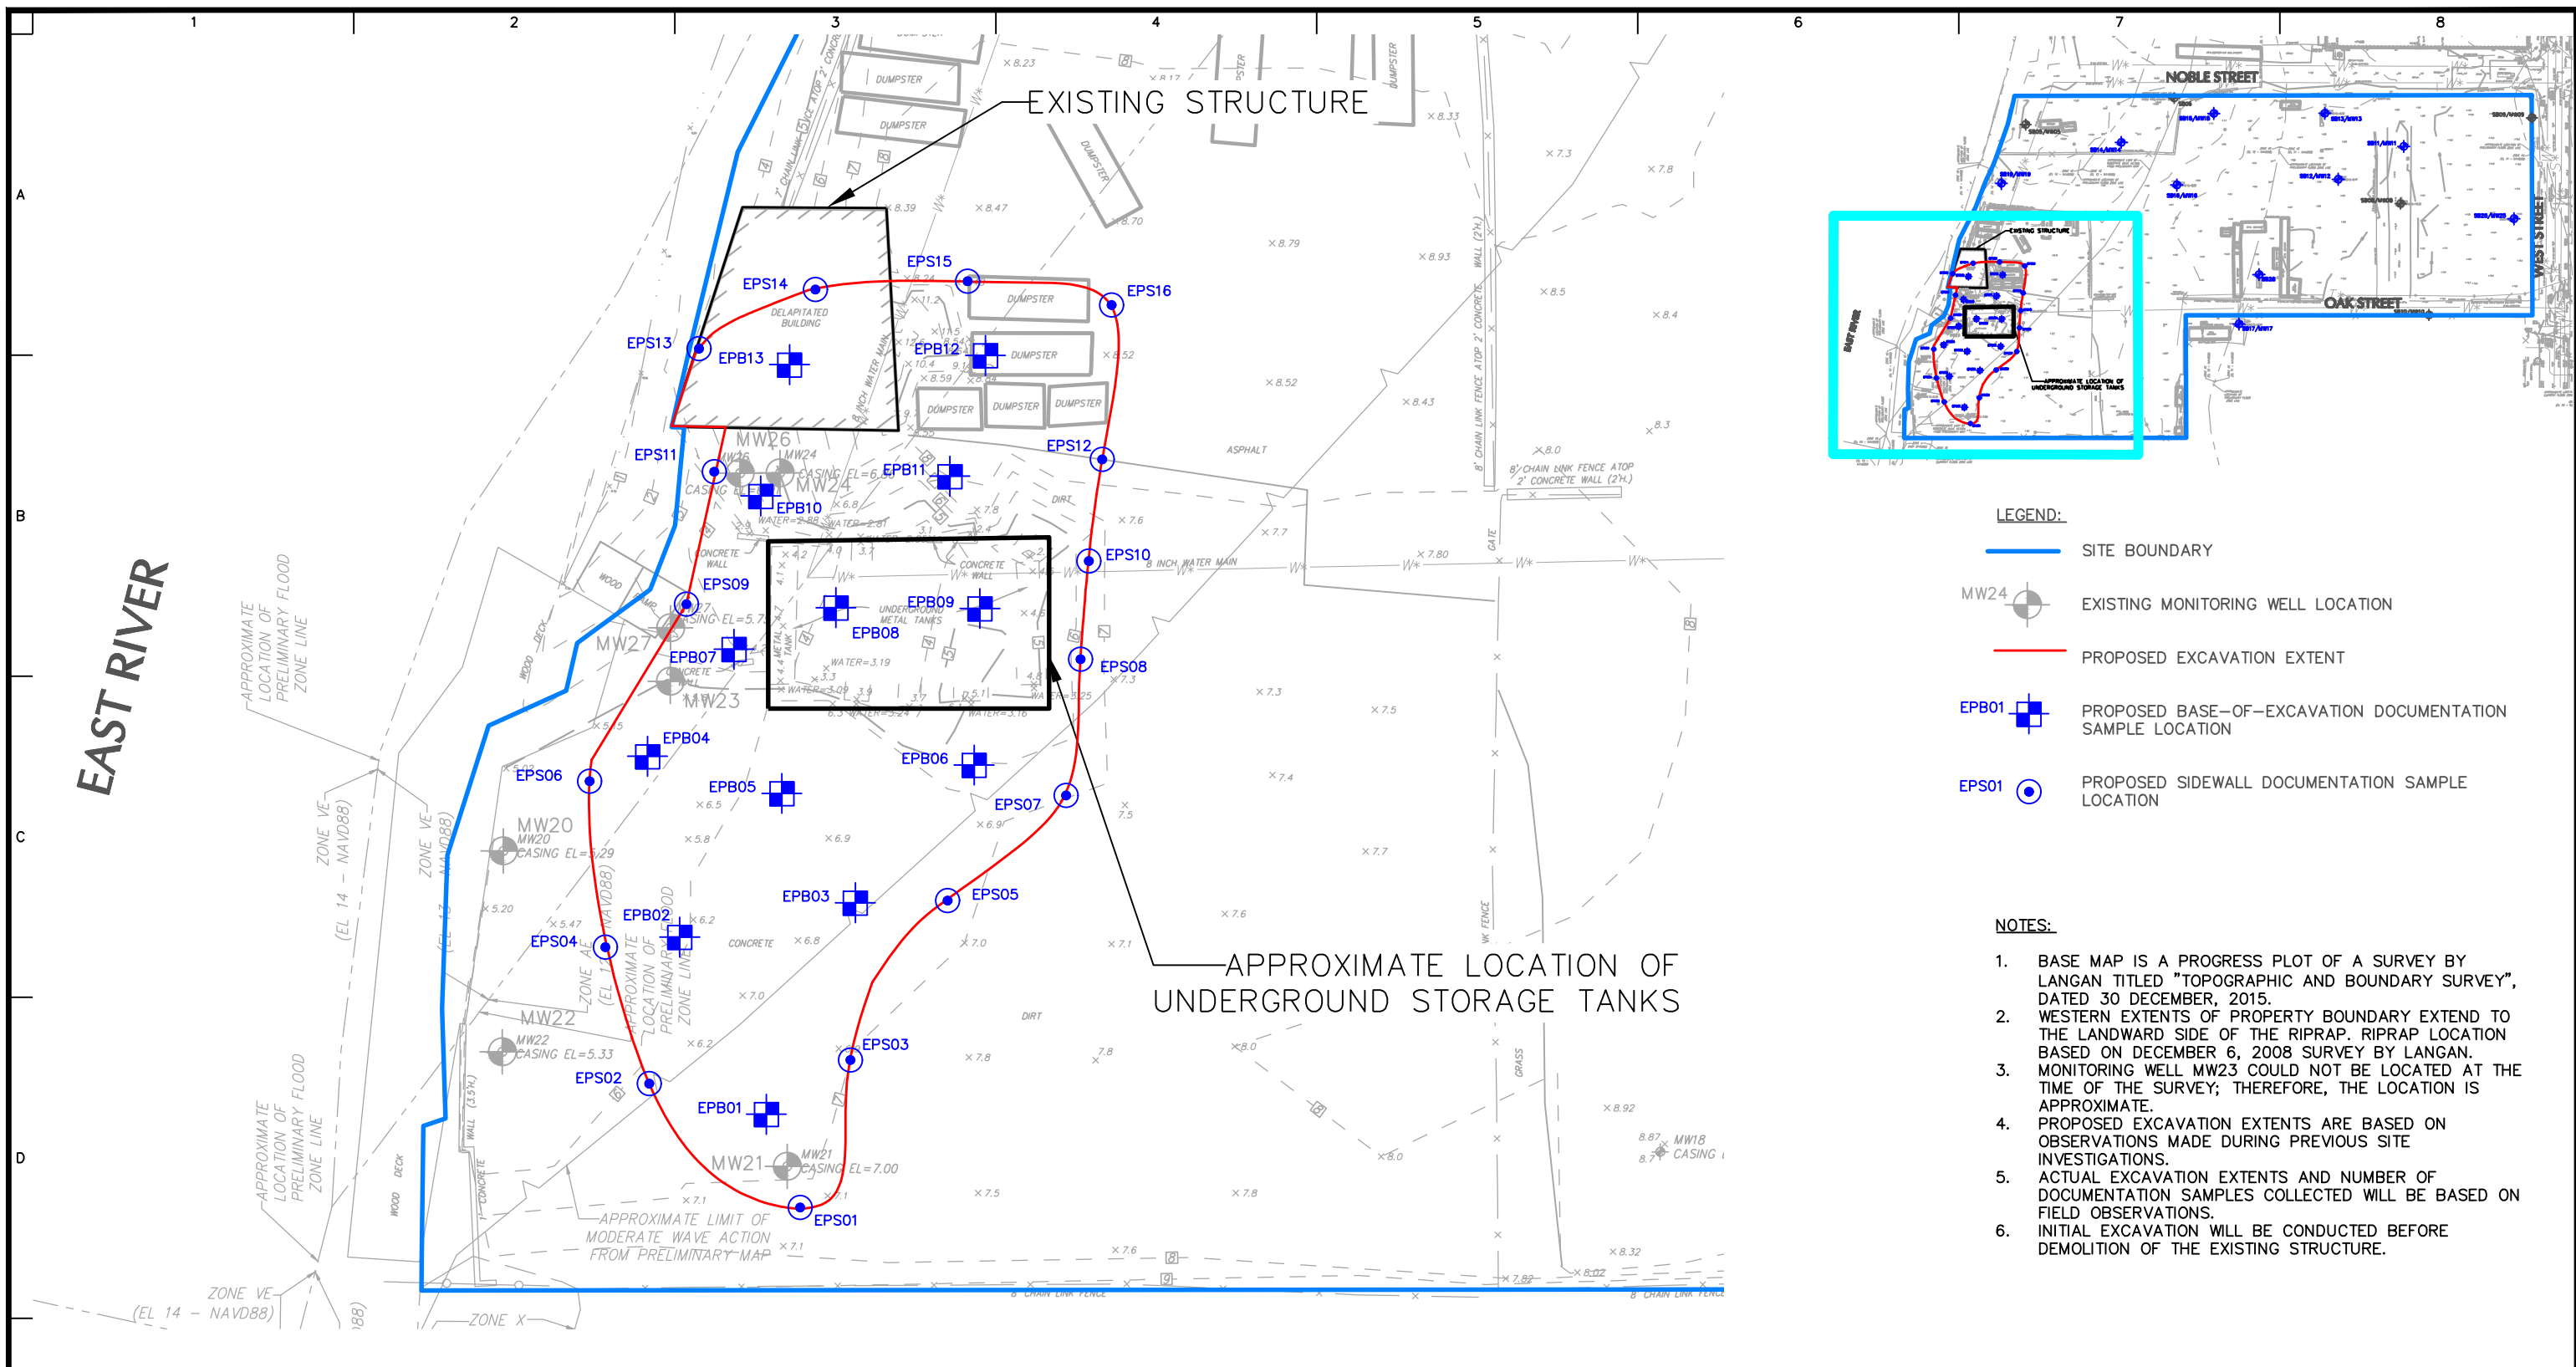

EAST RIVER

EXISTING STRUCTURE



APPROXIMATE LOCATION OF UNDERGROUND STORAGE TANKS

LEGEND:

- SITE BOUNDARY
- EXISTING MONITORING WELL LOCATION
- PROPOSED EXCAVATION EXTENT
- PROPOSED BASE-OF-EXCAVATION DOCUMENTATION SAMPLE LOCATION
- PROPOSED SIDEWALL DOCUMENTATION SAMPLE LOCATION

NOTES:

1. BASE MAP IS A PROGRESS PLOT OF A SURVEY BY LANGAN TITLED "TOPOGRAPHIC AND BOUNDARY SURVEY", DATED 30 DECEMBER, 2015.
2. WESTERN EXTENTS OF PROPERTY BOUNDARY EXTEND TO THE LANDWARD SIDE OF THE RIPRAP. RIPRAP LOCATION BASED ON DECEMBER 6, 2008 SURVEY BY LANGAN.
3. MONITORING WELL MW23 COULD NOT BE LOCATED AT THE TIME OF THE SURVEY; THEREFORE, THE LOCATION IS APPROXIMATE.
4. PROPOSED EXCAVATION EXTENTS ARE BASED ON OBSERVATIONS MADE DURING PREVIOUS SITE INVESTIGATIONS.
5. ACTUAL EXCAVATION EXTENTS AND NUMBER OF DOCUMENTATION SAMPLES COLLECTED WILL BE BASED ON FIELD OBSERVATIONS.
6. INITIAL EXCAVATION WILL BE CONDUCTED BEFORE DEMOLITION OF THE EXISTING STRUCTURE.




LANGAN

21 Penn Plaza, 360 West 31st Street, 8th Floor
 New York, NY 10001
 T: 212.479.5400 F: 212.479.5444 www.langan.com
 Langan Engineering, Environmental, Surveying and Landscape Architecture, D.P.C.
 Langan Engineering and Environmental Services, Inc.
 Langan CT, Inc.
 Langan International LLC
 Collectively known as Langan

Project
GREENPOINT MARINA
 BLOCK No. 2567, LOT No. 1
 BLOCK No. 2570, LOT No. 36
 GREENPOINT
 BROOKLYN NEW YORK

Figure Title
PROPOSED EXCAVATION AND DOCUMENTATION SAMPLE LOCATION PLAN

Project No. 170267701	Figure No.
Date 06/24/2016	3
Scale 1" = 30'	
Drawn By JFY	Checked By PM
Submission Date	Sheet 3 of 5

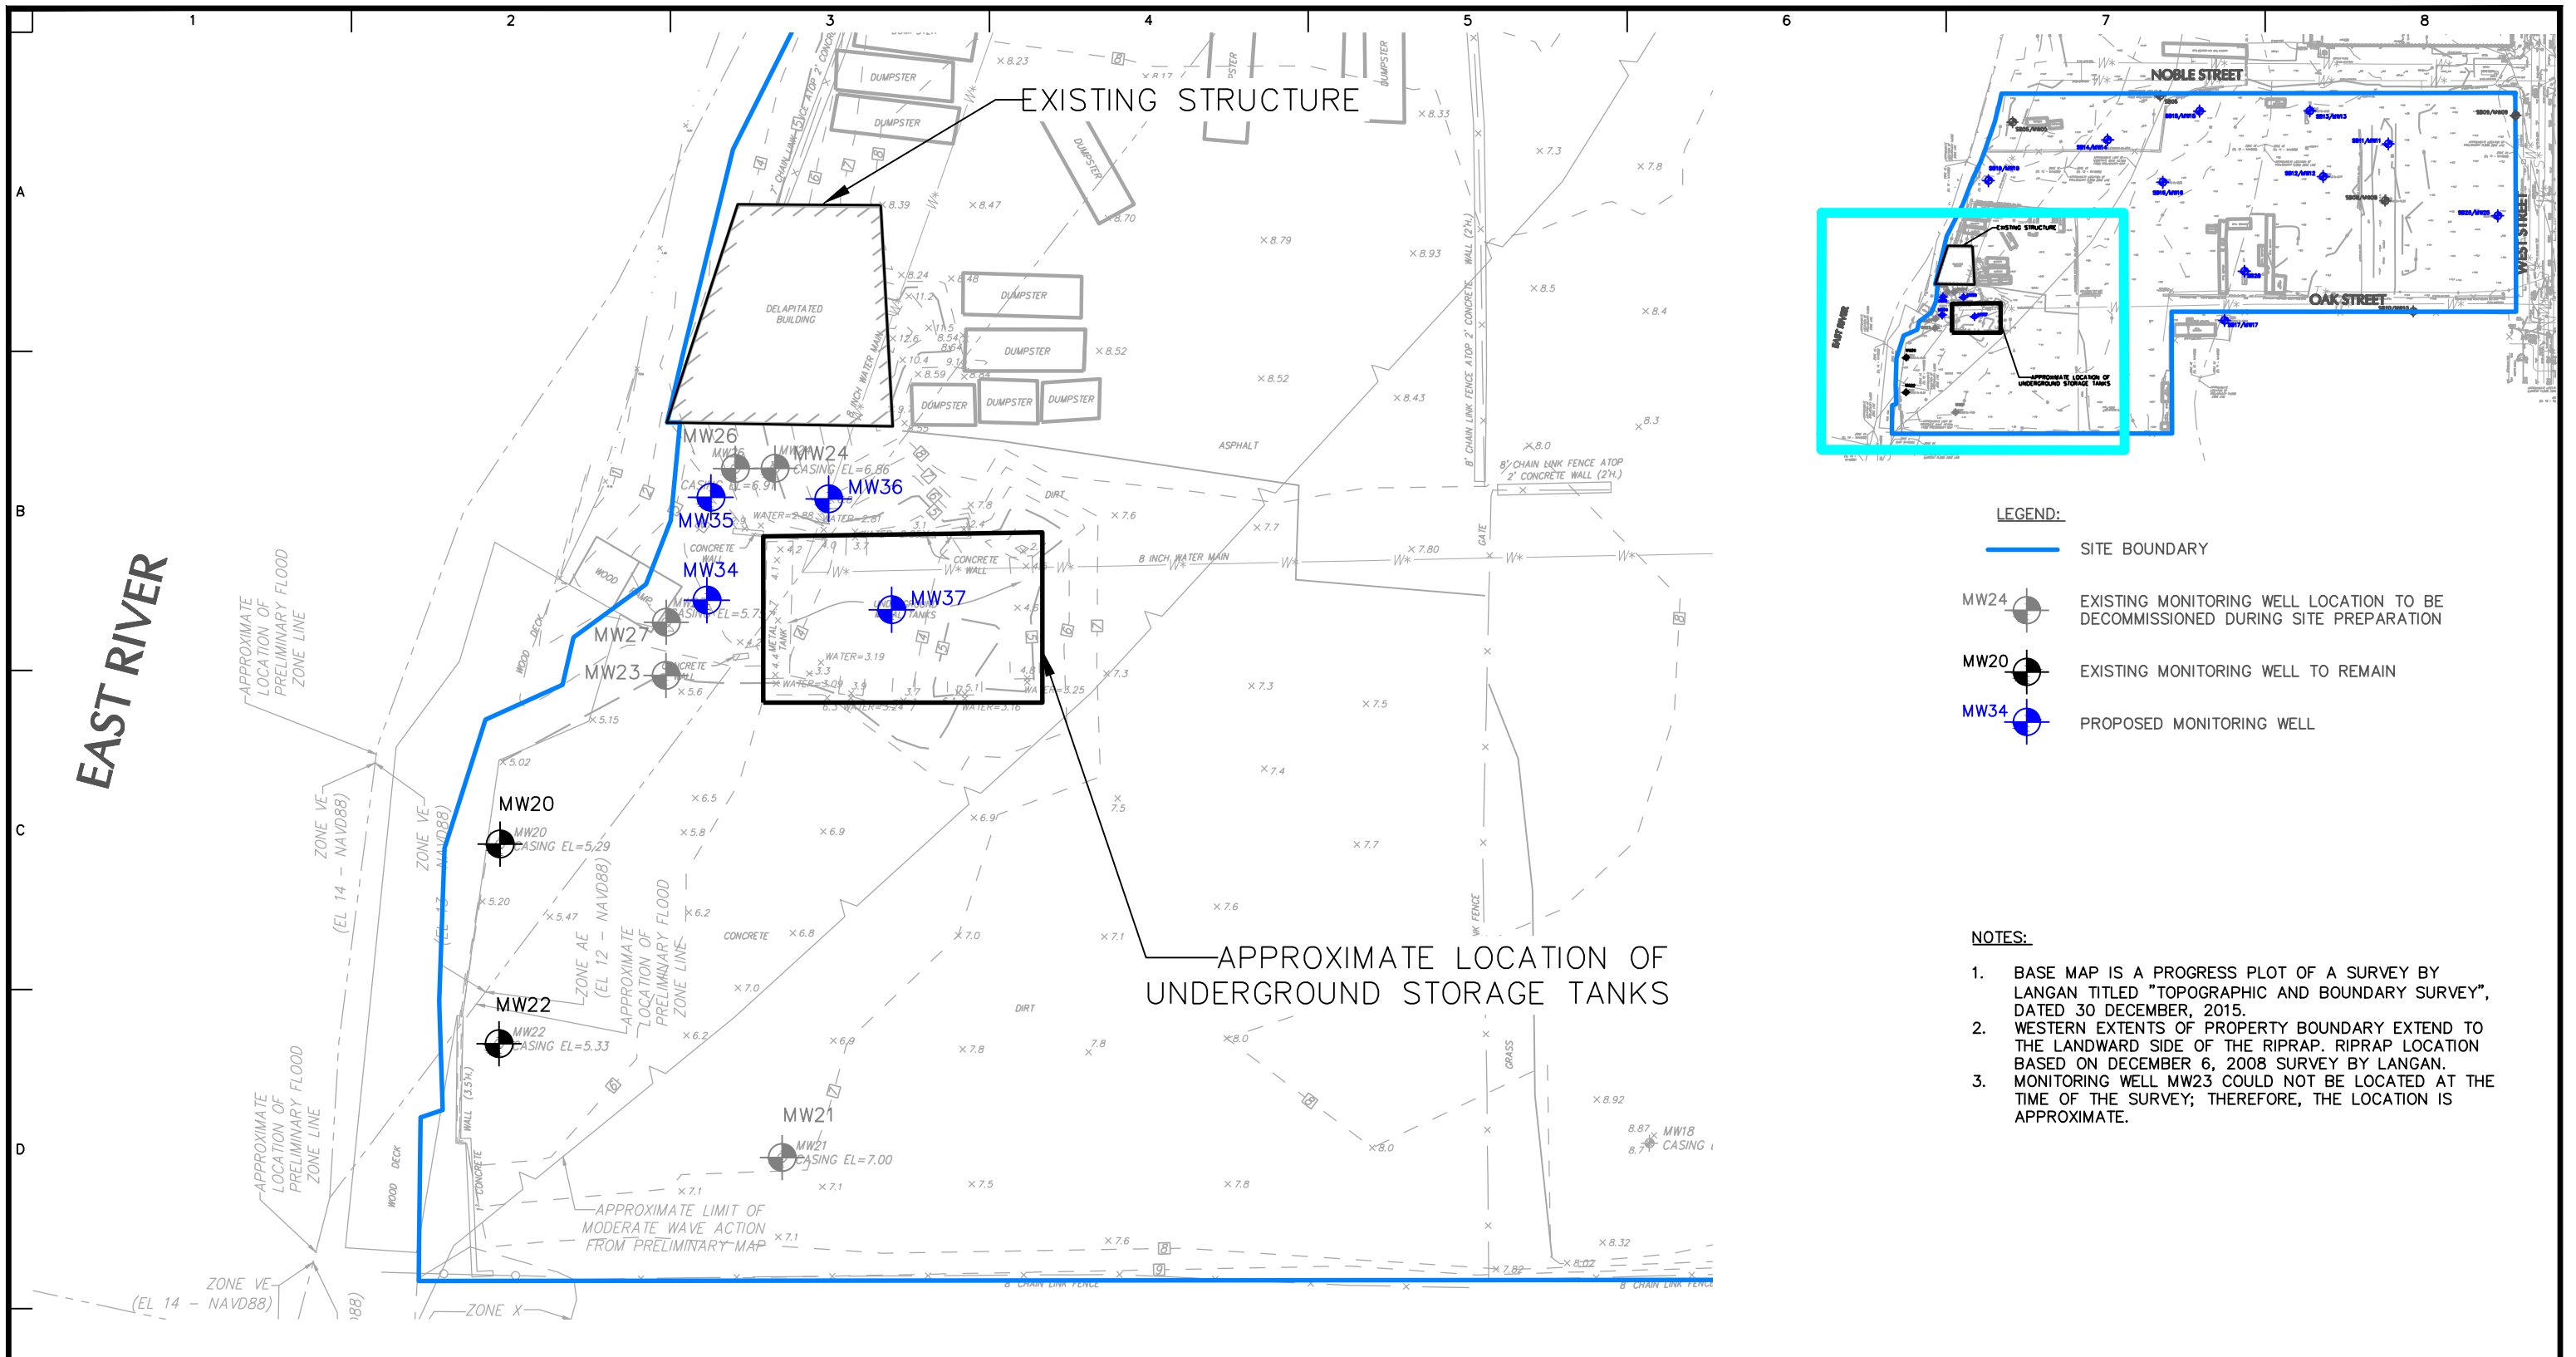


LEGEND:

- SITE BOUNDARY
- MW24 EXISTING MONITORING WELL LOCATION TO BE DECOMMISSIONED DURING SITE PREPARATION
- MW20 EXISTING MONITORING WELL TO REMAIN
- MW34 PROPOSED MONITORING WELL

NOTES:

1. BASE MAP IS A PROGRESS PLOT OF A SURVEY BY LANGAN TITLED "TOPOGRAPHIC AND BOUNDARY SURVEY", DATED 30 DECEMBER, 2015.
2. WESTERN EXTENTS OF PROPERTY BOUNDARY EXTEND TO THE LANDWARD SIDE OF THE RIPRAP. RIPRAP LOCATION BASED ON DECEMBER 6, 2008 SURVEY BY LANGAN.
3. MONITORING WELL MW23 COULD NOT BE LOCATED AT THE TIME OF THE SURVEY; THEREFORE, THE LOCATION IS APPROXIMATE.

EAST RIVER



LANGAN

21 Penn Plaza, 360 West 31st Street, 8th Floor
 New York, NY 10001
 T: 212.479.5400 F: 212.479.5444 www.langan.com
 Langan Engineering, Environmental, Surveying and
 Landscape Architecture, D.P.C.
 Langan Engineering and Environmental Services, Inc.
 Langan CT, Inc.
 Langan International LLC
 Collectively known as Langan

Project
GREENPOINT MARINA
 BLOCK No. 2567, LOT No. 1
 BLOCK No. 2570, LOT No. 36
 GREENPOINT
 BROOKLYN NEW YORK

Figure Title
MONITORING WELL LOCATION PLAN

Project No. 170267701	Figure No.
Date 11/19/2016	4
Scale 1" = 30'	
Drawn By JFY	Checked By PM
Submission Date	Sheet 4 of 5



Legend

Local Truck Route Trucks with an origin or destination for the purpose of delivery, loading or servicing within the respective Borough, shall only operate on designated local routes, except that an operator may operate on a non-designated street for the purpose of arriving at his/her destination. This shall be accomplished by leaving a designated truck route at the intersection that is nearest to their destination, proceeding by the most direct route, and then returning to the nearest designated truck route by the most direct route. If the operator has additional destinations in the same general area, he/she may proceed by the most direct route to his/her next destination without returning to a designated truck route, provided that the operator's next destination does not require that he/she cross a designated truck route.	Industrial Business Zones (IBZ)
Through Truck Route Trucks having neither an origin nor a destination within the respective Borough shall restrict the operation of such vehicles to those street segments designated as Through Truck Routes.	Parks and Open Spaces
Through Truck Route on Expressway	Highway Exit
Through Truck Route on Tunnel	Commercial Vehicles Prohibited
Exception 53' Trailers Allowed For definition see information on reverse side.	Low Vertical Clearance Area

- NOTES:
1. TRUCK ROUTE MAP ADAPTED FROM THE 2015 NEW YORK CITY DEPARTMENT OF TRANSPORTATION TRUCK ROUTE MAP.
 2. BASE MAP IS A PROGRESS PLOT OF A SURVEY BY LANGAN TITLED "TOPOGRAPHIC AND BOUNDARY SURVEY", DATED 30 DECEMBER, 2015.
 3. WESTERN EXTENTS OF PROPERTY BOUNDARY EXTEND TO THE LANDWARD SIDE OF THE RIPRAP. RIPRAP LOCATION BASED ON DECEMBER 6, 2008 SURVEY BY LANGAN.

LANGAN

21 Penn Plaza, 360 West 31st Street, 8th Floor
 New York, NY 10001
 T: 212.479.5400 F: 212.479.5444 www.langan.com
 Langan Engineering, Environmental, Surveying and
 Landscape Architecture, D.P.C.
 Langan Engineering and Environmental Services, Inc.
 Langan CT, Inc.
 Langan International LLC
 Collectively known as Langan

Project
GREENPOINT MARINA
 BLOCK No. 2567, LOT No. 1
 BLOCK No. 2570, LOT No. 36
 GREENPOINT
 BROOKLYN NEW YORK

Figure Title
TRUCK ROUTE MAP

Project No. 170267701	Figure No.
Date 06/29/2016	5
Scale AS SHOWN	
Drawn By PM	Checked By JA
Submission Date	Sheet 5 of 5

**APPENDIX A
REMEDIATION SCHEDULE**

APPENDIX B
CONSTRUCTION HEALTH AND SAFETY PLAN

CONSTRUCTION HEALTH AND SAFETY PLAN

FOR

**GREENPOINT MARINA
43-57 WEST STREET & 2-24 OAK STREET
BROOKLYN, NEW YORK
NYSDEC BCP NO.: C224190**

Prepared For

**57 West LLC & 24 Oak LLC
c/o Pearl Realty Management, LLC
155 Water Street, 3rd Floor
Brooklyn, New York 11201**

Prepared By:

**Langan Engineering, Environmental, Surveying
and Landscape Architecture, D.P.C.
21 Penn Plaza
360 West 31st Street, 8th Floor
New York, New York 10001**

June 2016

Langan Project No. 170267701

LANGAN

TABLE OF CONTENTS

	<u>Page No.</u>
1.0 INTRODUCTION	1
1.1 GENERAL.....	1
1.2 SITE LOCATION AND BACKGROUND	1
1.3 SUMMARY OF WORK TASKS	2
1.3.1 Soil Investigation and Sampling	2
1.3.2 Decommissioning and Removal USTs	3
1.3.3 Removal of LNAPL from the Open Excavation	3
1.3.4 Demolition of the Unoccupied Building Located North of the UST Area	3
1.3.5 LNAP Monitoring Well Installation	3
1.3.6 Excavation and Soil Screening	3
1.3.7 Stockpiling	4
1.3.8 Soil Sampling	4
1.3.9 Backfilling of Excavated Areas to Development Grade.....	4
1.3.10 Drum Sampling.....	4
2.0 IDENTIFICATION OF KEY PERSONNEL/HEALTH AND SAFETY PERSONNEL	4
2.1 LANGAN PROJECT MANAGER	5
2.2 LANGAN CORPORATE HEALTH AND SAFETY MANAGER.....	5
2.3 LANGAN SITE HEALTH & SAFETY OFFICER	5
2.4 LANGAN FIELD TEAM LEADER RESPONSIBILITIES	6
2.5 CONTRACTOR RESPONSIBILITIES	6
3.0 TASK/OPERATION SAFETY AND HEALTH RISK ANALYSES	7
3.1 SPECIFIC TASK SAFETY ANALYSIS.....	7
3.1.1 Soil Investigation and Sampling	7
3.1.2 Removal of Underground Storage Tanks	7
3.1.3 Removal of LNAPL from the Open Excavation	8
3.1.4 Demolition of the Building Located North of the UST Area	8
3.1.5 Stockpiling	8
3.1.6 Soil Sampling.....	9
3.1.7 Backfilling of Excavated Areas to Development Grade.....	9
3.1.8 Drum Sampling.....	9
3.2 RADIATION HAZARDS.....	9
3.3 PHYSICAL HAZARDS.....	9
3.3.1 Explosion	9
3.3.2 Heat Stress.....	9
3.3.3 Cold-Related Illness.....	11
3.3.4 Noise	12
3.3.5 Hand and Power Tools	12
3.3.6 Slips, Trips and Fall Hazards	12
3.3.7 Utilities (Electrocution and Fire Hazards)	12
3.4 BIOLOGICAL HAZARDS	13
3.4.1 Animals.....	13
3.4.2 Insects.....	13
3.5 ADDITIONAL SAFETY ANALYSIS	13
3.5.1 Presence of Non-Aqueous Phase Liquids (NAPL).....	13

3.6	JOB SAFETY ANALYSIS.....	13
4.0	PERSONNEL TRAINING.....	14
4.1	BASIC TRAINING.....	14
4.2	INITIAL SITE-SPECIFIC TRAINING.....	14
4.3	TAILGATE SAFETY BRIEFINGS.....	14
5.0	MEDICAL SURVEILLANCE.....	15
6.0	COMMUNITY AIR MONITORING PROGRAM.....	15
6.1	VAPOR EMISSION RESPONSE PLAN.....	16
6.2	MAJOR VAPOR EMISSION.....	16
6.3	MAJOR VAPOR EMISSION RESPONSE PLAN.....	17
6.4	DUST SUPPRESSION TECHNIQUES.....	17
7.0	PERSONAL PROTECTIVE EQUIPMENT.....	18
7.1	LEVELS OF PROTECTION.....	18
7.2	RESPIRATOR FIT-TEST.....	19
8.0	SITE CONTROL.....	19
8.1	SITE COMMUNICATIONS PLAN.....	19
8.2	WORK ZONES.....	19
8.2.1	Exclusion Zone.....	20
8.2.2	Contamination Reduction Zone.....	20
8.2.3	Support Zone.....	20
8.3	THE BUDDY SYSTEM.....	20
9.0	NEAREST MEDICAL ASSISTANCE.....	21
10.0	STANDING ORDERS/SAFE WORK PRACTICES.....	21
11.0	SITE SECURITY.....	21
12.0	UNDERGROUND UTILITIES.....	21
13.0	SITE SAFETY INSPECTION.....	22
14.0	HAND AND POWER TOOLS.....	22
15.0	DECONTAMINATION PLAN.....	22
15.1	GENERAL.....	22
15.2	DECONTAMINATION PROCEDURES.....	22
15.3	DISPOSAL OF DECONTAMINATION WASTES.....	22
16.0	EMERGENCY RESPONSE.....	22
16.1	GENERAL.....	22
16.2	RESPONSIBILITIES.....	23
16.3	EVACUATION.....	23
16.4	EMERGENCY CONTACTS/NOTIFICATION SYSTEM.....	23
16.5	EMERGENCY MEDICAL TREATMENT.....	24
16.6	FIRE OR EXPLOSION.....	24
16.7	SPILLS/LEAKS.....	24
16.8	ADVERSE WEATHER CONDITIONS.....	24
16.9	UNDERGROUND UTILITIES.....	25
16.10	DOCUMENTATION.....	25

17.0	CONFINED SPACE ENTRY	25
18.0	CHASP ACKNOWLEDGEMENT FORM	26

LIST OF TABLES

Table 1	Task Hazard Analysis
Table 2	Contaminant Hazards of Concern
Table 3	Summary of Monitoring Equipment
Table 4	Instrumentation Action Levels
Table 5	Emergency Notification List*
Table 6	Suggested Frequency of Physiological Monitoring For Fit and Acclimated Workers
Table 7	Heat Index

LIST OF FIGURES

Figure 1	Site Location Map
Figure 2	Route to Hospital (map with directions)*

LIST OF APPENDICES

Attachment A	Standing Orders*
Attachment B	Decontamination Procedures
Attachment C	Employee Exposure/Injury Incident Report
Attachment D	Calibration Log
Attachment E	Material Data Safety Sheets / Safety Data Sheets*
Attachment F	Jobsite Safety Inspection Checklist
Attachment G	Job Safety Analysis Forms
Attachment H	Tailgate Safety Meeting Log

* Items to be posted prominently on site, or made readily available to personnel.

1.0 INTRODUCTION

1.1 General

This Construction Health and Safety Plan (CHASP) was developed to address disturbance of known and reasonably anticipated subsurface contaminants and comply with Occupational Safety and Health Administration (OSHA) Standard 29 CFR 1910.120(b) (4), *Hazardous Waste Operations and Emergency Response* during anticipated site work at 43-57 West Street (Block 2567, Lot 1) & 2-24 Oak Street (Block 2570, Lot 36) ("Site"), New York, New York. This CHASP provides the minimum requirements for implementing site operations during waste classification and interim remedial measure activities. All contractors performing work on this Site shall implement their own Construction Health and Safety Plans that, at a minimum, adhere to this CHASP. The contractor is solely responsible for their own health and safety and that of their subcontractors. Langan personnel will implement this CHASP while on-site.

The management of the day-to-day site activities and implementation of this CHASP in the field is the responsibility of the site Langan Field Team Leader (FTL). Assistance in the implementation of this CHASP can also be obtained from the site Langan Health and Safety Officer (HSO) and the Langan Health and Safety Manager (HSM). Contractors operating on the Site shall designate their own FTL, HSO and HSM. The content of this CHASP may change or undergo revision based upon additional information made available to health and safety personnel, monitoring results, or changes in the work plan.

1.2 Site Location and Background

The site encompasses an area of about 4.095 acres (178,378 square feet) and comprises two trapezoidal-shaped lots separated by and including Oak Street. Block 2567, Lot 1 (43-57 West Street; hereinafter referred to as the "northern lot"), is bordered by Noble Street to the north, West Street to the east, Oak Street to the south, and the top of the riprap-stabilized shoreline of the East River to the west. Block 2570, Lot 36 (2-24 Oak Street, hereinafter referred to as the "southern lot"), is bordered by Oak Street to the north, a parking lot and lumber facility to the east and south, and the top of the riprap-stabilized shoreline of the East River to the west. The elevation of the site varies from about el 5 in the southwest to el 11 in the northeast.

The site is currently used for equipment storage including scaffolding, garbage containers, cranes, HVAC equipment, granite, and flatbed trucks. Improvements to the site include asphalt- and concrete-paved areas in the southern lot and eastern portion of the northern lot, and a riprap-stabilized shoreline along the East River. The site was previously occupied by five separate buildings that were demolished after a fire in 2006. The only remaining structure is an approximately 1,400-square-foot dilapidated former coal silo located in the southwestern corner of the northern lot. The USTs straddle the northern and southern lot boundaries in the

southwestern portion of the site. A site location map is included as Figure 1.

The site is located in an area of historical industrial usage and has been used for manufacturing purposes since the late 1800s. Past uses of the site include a shipyard, manufacturing facility, a mill, and Greenpoint Terminal Corporation facility. Sanborn maps, dated 1905 and 1916, indicate oil tanks and an oil pump house in the northwest corner of the site. Sanborn maps from 1942 to 2007 indicate seven USTs beneath the western end of Oak Street that separates the two site lots, and the USTs were uncovered and surveyed during the Remedial Investigation (RI) for the site.

The proposed interim remedial measure will include the following activities:

- Decommissioning and removal of seven unregistered, underground storage tanks (UST), and any unknown USTs encountered;
- Excavation, to the extent practicable, to remove petroleum-impacted material;
- Removal of residual light, non-aqueous phase liquid (LNAPL) from the open excavation;
- Demolition of an unoccupied building located north of the UST area to allow for additional removal of LNAPL and excavation of petroleum-impacted material;
- Collection of documentation soil samples from the base and sidewalls of all excavations;
- Backfilling of excavations, as necessary;
- Installation of three monitoring wells after excavation is complete for continued monitoring and potential recovery of residual LNAPL;
- Registration of all unregistered USTs with the NYSDEC Petroleum Bulk Storage (PBS) database; and
- Closure of NYSDEC Spill No. 13-08069.

A waste classification investigation will begin prior to the start of the interim remedial measure.

1.3 Summary of Work Tasks

The general categories of work tasks being performed during implementation of the work plan include:

1.3.1 Soil Investigation and Sampling

Langan will retain a drilling contractor to advance soil borings to a depth below grade surface (bgs) specified in the work plan, using GeoProbe® drilling technology. Borings locations will be based on the site inspection and document review. The drilling contractor will contact the appropriate utility mark-out authority and make available to their drilling staff the verification number and effective dates. The borings will be filled with clean soil cuttings after samples are collected.

Langan personnel will screen soil for visual, olfactory, and instrumental indicators suggestive of a potential chemical or petroleum release. Instrument screening for the presence of volatile organic compounds (VOCs) may be performed with a calibrated photoionization detector (PID). Langan personnel will collect soil samples from the two-foot interval exhibiting the greatest degree of visual, olfactory, instrumental impact, or otherwise specified in the work plan. Soil samples will be submitted to a New York State Department of Health (NYSDOH) Environmental Laboratory Approval Program (ELAP)-certified laboratory and analyzed in accordance with work plan specifications.

1.3.2 Decommissioning and Removal USTs

The UST decommissioning and removal contractor shall furnish all labor and materials, equipment and incidentals required for the proper decontamination, removal and closure of any UST in accordance with federal, state and local regulations. Langan personnel will monitor VOCs with a calibrated PID downwind from the UST excavation and record the PID readings.

1.3.3 Removal of LNAPL from the Open Excavation

If significant LNAPL is encountered during excavation activities warranting vacuum truck extraction, a suitable contractor shall furnish all labor and materials, equipment and incidentals required for the proper vacuuming of LNAPL. Langan personnel will monitor VOCs with a calibrated PID downwind from the excavation and record the PID readings. Langan personnel may also apply absorbent pads or boons as appropriate.

1.3.4 Demolition of the Unoccupied Building Located North of the UST Area

The demolition contractor shall furnish all labor and materials, equipment and incidentals required for the proper demolition of the building located north of the UST area. This activity is independent of the Langan work scope.

1.3.5 LNAP Monitoring Well Installation

Langan will retain a drilling contractor to advance and complete three LNAPL monitoring wells for continued monitoring and potential recovery of LNAPL. Langan personnel will survey the location and elevations of the newly completed wells.

1.3.6 Excavation and Soil Screening

Langan personnel will screen excavated material for visual, olfactory, and instrumental indicators suggestive of a potential chemical or petroleum release. Instrument screening for the presence of volatile organic compounds (VOCs) may be performed with a calibrated photoionization detector (PID). Contractors will excavate for utilities, foundation components and potential grading using heavy equipment and hand tools. Contractors will notify Langan personnel if they identify indications suggestive of a potential chemical or petroleum release. Contaminated material shall be handled and properly disposed in accordance with federal, state

and city regulations, criteria and guidelines.

1.3.7 Stockpiling

Potentially impacted soil may be stockpiled on-site prior to off-site disposal at a facility permitted to accept the material. Visibly contaminated soil, if encountered, shall be segregated and stockpiled on at least 10 millimeters of plastic sheeting; reusable soil and fill shall be segregated and stockpiled separately from unusable fill, concrete and other debris; the stockpiles shall be kept covered with 6 millimeters thick plastic sheeting; the plastic sheeting covering the stockpiles shall be anchored firmly in place by weights, stakes, or both; the Contractor shall maintain the plastic sheeting. If stockpile soil sampling is required from above ground level, suitable excavation equipment (i.e., excavator, front end loader) should be used to collect the sample.

1.3.8 Soil Sampling

Soil samples (waste characterization, excavation endpoint, delineation, or quality assurance/quality control [QA/QC]) will be collected during construction, as required. Samples will be placed into laboratory-supplied batch-certified clean glassware and submitted to a New York State Department of Health (NYSDOH) Environmental Laboratory Accreditation Program (ELAP)-certified laboratory.

1.3.9 Backfilling of Excavated Areas to Development Grade

The contractor shall furnish all labor and materials, equipment and incidentals required for the proper backfilling of excavated areas to development grade. Langan personnel will document that the backfilling

1.3.10 Drum Sampling

Excess or impacted soil and water drummed during the remedial action activities must be labeled in accordance with the Langan Drum Labeling Standard Operating Procedure (SOP-#9). Langan field personnel will collect drum samples, as required, prior to off-site drum disposal. Samples will be placed into laboratory-supplied batch-certified clean glassware and submitted to a NYSDOH ELAP-certified laboratory.

2.0 IDENTIFICATION OF KEY PERSONNEL/HEALTH AND SAFETY PERSONNEL

The following briefly describes the health and safety (H&S) designations and general responsibilities that may be employed for this site. The titles have been established to accommodate the project needs and requirements and ensure the safe conduct of site activities. The H&S personnel requirements for a given work location are based upon the proposed site activities.

2.1 Langan Project Manager

The Langan Project Manager (PM) is Paul McMahon. His responsibilities include:

- Ensuring that this CHASP is developed and approved prior to on-site activities.
- Ensuring that all the tasks in the project are performed in a manner consistent with Langan's comprehensive *Health and Safety Program for Hazardous Waste Operations* and this CHASP.

2.2 Langan Corporate Health and Safety Manager

The Langan Corporate Health and Safety Manager (HSM) is Tony Moffa. His responsibilities include:

- Updating the *Health and Safety Program for Hazardous Waste Operations*.
- Assisting the site Health and Safety Officer (HSO) with development of the CHASP, updating CHASP as dictated by changing conditions, jobsite inspection results, etc. and approving changes to this CHASP.
- Assisting the HSO in the implementation of this CHASP and conducting Jobsite Safety Inspections and assisting with communication of results and correction of shortcomings found.
- Maintaining records on personnel (medical evaluation results, training and certifications, accident investigation results, etc.).

2.3 Langan Site Health & Safety Officer

The Langan site HSO is William Bohrer. His responsibilities include:

- Participating in the development and implementation of this CHASP.
- When on-site, assisting the Langan Field Team Leader in conducting Tailgate Safety Meetings and Jobsite Safety Inspections and correcting any shortcomings in a timely manner.
- Ensuring that proper PPE is available, worn by employees and properly stored and maintained.
- Controlling entry into and exit from the site contaminated areas or zones.
- Monitoring employees for signs of stress, such as heat stress, fatigue, and cold exposure.
- Monitoring site hazards and conditions.
- Knowing (and ensuring that all site personnel also know) emergency procedures,

evacuation routes, and the telephone numbers of the ambulance, local hospital, poison control center, fire department, and police department.

- Resolving conflicts that may arise concerning safety requirements and working conditions.
- Reporting all incidents, injuries and near misses to the Langan Incident/Injury Hotline immediately and the client representative.

2.4 Langan Field Team Leader Responsibilities

The Langan Field Team Leader (FTL) is to be determined prior to the start of construction activities. The Field Team Leader's responsibilities include:

- The management of the day-to-day site activities and implementation of this CHASP in the field.
- Participating in and/or conducting Tailgate Safety Meetings and Jobsite Safety Inspections and correcting any shortcomings in a timely manner.
- When a Community Air Monitoring Operating Program (CAMP) is part of the scope, the FTL will set up and maintaining community air monitoring activities and instructing the responsible contractor to implement organic vapor or dust mitigation when necessary.
- Overseeing the implementation of activities specified in the work plan.

2.5 Contractor Responsibilities

The contractor shall develop and implement their own CHASP for their employees, lower-tier subcontractors, and consultants. The contractor is solely responsible for their own health and safety and that of their subcontractors. Contractors operating on the Site shall designate their own FTL, HSO and HSM. The contractor's CHASP will be at least as stringent as this Langan CHASP. The contractor must be familiar with and abide by the requirements outlined in their own CHASP. A contractor may elect to adopt Langan's CHASP as its own provided that it has given written notification to Langan, but where Langan's CHASP excludes provisions pertinent to the contractor's work (i.e., confined space entry); the contractor must provide written addendums to this CHASP. Additionally, the contractor must:

- Ensure their employees are trained in the use of all appropriate PPE for the tasks involved;
- Notify Langan of any hazardous material brought onto the job site or site related area, the hazards associated with the material, and must provide a material safety data sheet (MSDS) or safety data sheet (SDS) for the material;
- Have knowledge of, understand, and abide by all current federal, state, and local health

and safety regulations pertinent to the work;

- Ensure their employees handling hazardous materials, if identified at the Site, have received current training in the appropriate levels of 29 CFR 1910.120, *Hazardous Waste Operations and Emergency Response* (HAZWOPER) if hazardous waste is identified at the Site;
- Ensure their employees handling hazardous materials, if identified at the Site, have been fit-tested within the year on the type respirator they will wear; and
- Ensure all air monitoring is in place pertaining to the health and safety of their employees as required by OSHA 1910.120; and
- All contractors must adhere to all federal, state, and local regulatory requirements.

3.0 TASK/OPERATION SAFETY AND HEALTH RISK ANALYSES

A Task-Hazard Analysis (Table 1) was completed for general construction hazards that may be encountered at the Site. Known and suspected chemical contaminant hazards that could be encountered during site operations are included in Table 2. A complete inventory of MSDS/SDS for chemical products used on site is included as Attachment E.

3.1 Specific Task Safety Analysis

3.1.1 Soil Investigation and Sampling

Sampling the soil requires the donning of chemical resistant gloves in addition to the standard PPE. Only drilling personnel who have been properly training by the drilling contractor are permitted to operate drilling equipment or open sampling devices (acetate liners, sonic sample bags, etc.).

3.1.2 Removal of Underground Storage Tanks

During UST excavation and removal activity, Langan personnel will conduct air monitoring for lower explosion limit (LEL) conditions within the UST excavation itself. This task is to be performed using calibrated air monitoring equipment designed to sound an audio alarm when atmospheric concentrations of VOC are within 10% of the LEL. In normal atmospheric oxygen concentrations, the LEL monitoring may be done with a Wheatstone bridge/catalytic bead type sensor (i.e. MultiRAE). However in oxygen depleted atmospheres (confined space), only an LEL designed to work in low oxygen environments may be used. Best practices require that the LEL monitoring unit be equipped with a long sniffer tube to allow the LEL unit to remain outside the UST excavation. Langan personnel are not to enter the UST excavation nor enter an excavated UST.

In addition to monitoring LEL, Langan personnel will monitor atmospheric VOC concentrations directly downwind of the UST excavation in accordance with standard CAMP procedures using

calibrated air monitoring equipment.

Only the UST decommissioning and removal contractor personnel who have been properly trained by the contractor are permitted to operate any of the UST decommissioning removal equipment.

3.1.3 Removal of LNAPL from the Open Excavation

While LNAPL is being removed from the excavation, Langan personnel will conduct air monitoring for lower explosion limit (LEL) conditions within the excavation itself. This task is to be performed using calibrated air monitoring equipment designed to sound an audio alarm when atmospheric concentrations of VOC are within 10% of the LEL. In normal atmospheric oxygen concentrations, the LEL monitoring may be done with a Wheatstone bridge/catalytic bead type sensor (i.e. MultiRAE). However in oxygen depleted atmospheres (confined space), only an LEL designed to work in low oxygen environments may be used. Best practices require that the LEL monitoring unit be equipped with a long sniffer tube to allow the LEL unit to remain outside the UST excavation. Langan personnel are not to enter the UST excavation nor enter an excavated UST.

In addition to monitoring LEL, Langan personnel will monitor atmospheric VOC concentrations directly downwind of the UST excavation in accordance with standard CAMP procedures using calibrated air monitoring equipment.

Removing LNAPL from the open excavation requires the donning of chemical resistant gloves and when atmospheric VOC concentrations are above 5 ppm, the donning of a respirator, in addition to the standard PPE. Only vacuum contractor personnel who have been properly training by the contractor are permitted to operate the vacuum equipment.

3.1.4 Demolition of the Building Located North of the UST Area

The demolition contractor will provide their employees with equivalent PPE to protect them from the specific hazards likely to be encountered on-site. Selection of the appropriate PPE must take into consideration: (1) identification of the hazards or suspected hazards; (2) potential exposure routes; and, (3) the performance of the PPE construction (materials and seams) in providing a barrier to these hazards. If during the demolition exposed soil or groundwater is observed to be impacted the contractor HSO or may modify standard PPE after conferring with the Langan.

3.1.5 Stockpiling

The stockpile should be graded to insure slope stability. When covering the stockpile, the cover installation should be completed without necessitating someone scaling the pile.

3.1.6 Soil Sampling

Sampling the pile requires the donning of chemical resistant gloves in addition to the standard PPE.

3.1.7 Backfilling of Excavated Areas to Development Grade

The backfilling contractor will provide their employees with equivalent PPE to protect them from the specific hazards likely to be encountered on-site. Selection of the appropriate PPE must take into consideration: (1) identification of the hazards or suspected hazards; (2) potential exposure routes; and, (3) the performance of the PPE construction (materials and seams) in providing a barrier to these hazards. Langan personnel may survey backfilling material with a calibrated PID; however, as they are not permitted to climb the material delivery truck, the contractor must provide samples from each truck as required.

3.1.8 Drum Sampling

Langan personnel and contractors are not to move or opened any orphaned (unlabeled) drum found on the site without approval of the project manager.

3.2 Radiation Hazards

No radiation hazards are known or expected at the site.

3.3 Physical Hazards

Physical hazards, which may be encountered during site operations for this project, are detailed in Table 1.

3.3.1 Explosion

No explosion hazards are expected for the scope of work at this site.

3.3.2 Heat Stress

The use of Level C protective equipment, or greater, may create heat stress. Monitoring of personnel wearing personal protective clothing should commence when the ambient temperature is 72°F or above. Table 6 presents the suggested frequency for such monitoring. Monitoring frequency should increase as ambient temperature increases or as slow recovery rates are observed. Refer to the Table 7 to assist in assessing when the risk for heat related illness is likely. To use this table, the ambient temperature and relative humidity must be obtained (a regional weather report should suffice). Heat stress monitoring should be performed by the HSO or the FTL, who shall be able to recognize symptoms related to heat stress.

To monitor the workers, be familiar with the following heat-related disorders and their symptoms:

- **Heat Cramps:** Painful spasm of arm, leg or abdominal muscles, during or after work
- **Heat Exhaustion:** Headache, nausea, dizziness; cool, clammy, moist skin; heavy sweating; weak, fast pulse; shallow respiration, normal temperature
- **Heat Stroke:** Headache, nausea, weakness, hot dry skin, fever, rapid strong pulse, rapid deep respirations, loss of consciousness, convulsions, coma. *This is a life threatening condition.*

Do not permit a worker to wear a semi-permeable or impermeable garment when they are showing signs or symptoms of heat-related illness.

To monitor the worker, measure:

- **Heart rate:** Count the radial pulse during a 30-second period as early as possible in the rest period. If the heart rate exceeds 100 beats per minute at the beginning of the rest period, shorten the next work cycle by one-third and keep the rest period the same. If the heart rate still exceeds 100 beats per minute at the next rest period, shorten the following work cycle by one-third. A worker cannot return to work after a rest period until their heart rate is below 100 beats per minute.
- **Oral temperature:** Use a clinical thermometer (3 minutes under the tongue) or similar device to measure the oral temperature at the end of the work period (before drinking). If oral temperature exceeds 99.6°F (37.6°C), shorten the next work cycle by one-third without changing the rest period. A worker cannot return to work after a rest period until their oral temperature is below 99.6°F. If oral temperature still exceeds 99.6°F (37.6°C) at the beginning of the next rest period, shorten the following cycle by one-third. Do not permit a worker to wear a semi-permeable or impermeable garment when oral temperature exceeds 100.6°F (38.1°C).

Prevention of Heat Stress - Proper training and preventative measures will aid in averting loss of worker productivity and serious illness. Heat stress prevention is particularly important because once a person suffers from heat stroke or heat exhaustion, that person may be predisposed to additional heat related illness. To avoid heat stress the following steps should be taken:

- Adjust work schedules.
- Mandate work slowdowns as needed.
- Perform work during cooler hours of the day if possible or at night if adequate lighting can be provided.
- Provide shelter (air-conditioned, if possible) or shaded areas to protect personnel during rest periods.

- Maintain worker's body fluids at normal levels. This is necessary to ensure that the cardiovascular system functions adequately. Daily fluid intake must approximately equal the amount of water lost in sweat, i.e., eight fluid ounces (0.23 liters) of water must be ingested for approximately every eight ounces (0.23 kg) of weight lost. The normal thirst mechanism is not sensitive enough to ensure that enough water will be drunk to replace lost sweat. When heavy sweating occurs, encourage the worker to drink more. The following strategies may be useful:
 - Maintain water temperature 50° to 60°F (10° to 16.6°C).
 - Provide small disposal cups that hold about four ounces (0.1 liter).
 - Have workers drink 16 ounces (0.5 liters) of fluid (preferably water or dilute drinks) before beginning work.
 - Urge workers to drink a cup or two every 15 to 20 minutes, or at each monitoring break. A total of 1 to 1.6 gallons (4 to 6 liters) of fluid per day are recommended, but more may be necessary to maintain body weight.
 - Train workers to recognize the symptoms of heat related illness.

3.3.3 Cold-Related Illness

If work on this project begins in the winter months, thermal injury due to cold exposure can become a problem for field personnel. Systemic cold exposure is referred to as hypothermia. Local cold exposure is generally called frostbite.

- **Hypothermia** - Hypothermia is defined as a decrease in the patient core temperature below 96°F. The body temperature is normally maintained by a combination of central (brain and spinal cord) and peripheral (skin and muscle) activity. Interference with any of these mechanisms can result in hypothermia, even in the absence of what normally is considered a "cold" ambient temperature. Symptoms of hypothermia include: shivering, apathy, listlessness, sleepiness, and unconsciousness.
- **Frostbite** - Frostbite is both a general and medical term given to areas of local cold injury. Unlike systemic hypothermia, frostbite rarely occurs unless the ambient temperatures are less than freezing and usually less than 20°F. Symptoms of frostbite are: a sudden blanching or whitening of the skin; the skin has a waxy or white appearance and is firm to the touch; tissues are cold, pale, and solid.

Prevention of Cold-Related Illness - To prevent cold-related illness:

- Educate workers to recognize the symptoms of frostbite and hypothermia
- Identify and limit known risk factors:
- Assure the availability of enclosed, heated environment on or adjacent to the site.

- Assure the availability of dry changes of clothing.
- Assure the availability of warm drinks.
- Start (oral) temperature recording at the job site:
- At the FSO or Field Team Leader's discretion when suspicion is based on changes in a worker's performance or mental status.
- At a worker's request.
- As a screening measure, two times per shift, under unusually hazardous conditions (e.g., wind-chill less than 20°F, or wind-chill less than 30°F with precipitation).
- As a screening measure whenever anyone worker on the site develops hypothermia.

Any person developing moderate hypothermia (a core temperature of 92°F) cannot return to work for 48 hours.

3.3.4 Noise

Work activities during the proposed activities may be conducted at locations with high noise levels from the operation of equipment. Hearing protection will be used as necessary.

3.3.5 Hand and Power Tools

The use of hand and power tools can present a variety of hazards, including physical harm from being struck by flying objects, being cut or struck by the tool, fire, and electrocution. All hand and power tools should be inspected for health and safety hazards prior to use. If deemed unserviceable/un-operable, notify supervisor and tag equipment out of service. Ground Fault Circuit Interrupters (GFCIs) are required for all power tools requiring direct electrical service.

3.3.6 Slips, Trips and Fall Hazards

Care should be exercised when walking at the site, especially when carrying equipment. The presence of surface debris, uneven surfaces, pits, facility equipment, and soil piles contribute to tripping hazards and fall hazards. To the extent possible, all hazards should be identified and marked on the Site, with hazards communicated to all workers in the area.

3.3.7 Utilities (Electrocution and Fire Hazards)

The possibility of encountering underground utilities poses fire, explosion, and electrocution hazards. All excavation work will be preceded by review of available utility drawings and by notification of the subsurface work to the N.Y. One –Call–Center. Potential adverse effects of electrical hazards include burns and electrocution, which could result in death.

3.4 Biological Hazards

3.4.1 Animals

No animals are expected to be encountered during site operations.

3.4.2 Insects

Insects are not expected to be encountered during site operations.

3.5 Additional Safety Analysis

3.5.1 Presence of Non-Aqueous Phase Liquids (NAPL)

There is potential for exposure to NAPL at this site. Special care and PPE should be considered when NAPL is observed as NAPL is a typically flammable fluid and releases VOCs known to be toxic and/or carcinogenic. If NAPL is present in a monitoring well, vapors from the well casing may contaminate the work area breathing zone with concentrations of VOCs potentially exceeding health and safety action levels. In addition, all equipment used to monitor or sample NAPL (or ground water from wells containing NAPL) must be intrinsically safe. Equipment that directly contacts NAPL must also be resistant to organic solvents.

At a minimum, a PID should be used to monitor for VOCs when NAPL is observed. If NAPL is expected to be observed in an excavation or enclosed area, air monitoring must be started using calibrated air monitoring equipment designed to sound an audio alarm when atmospheric concentrations of VOC are within 10% of the LEL. In normal atmospheric oxygen concentrations, the LEL monitoring may be done with a Wheatstone bridge/catalytic bead type sensor (i.e. MultiRAE). However in oxygen depleted atmospheres (confined space), only an LEL designed to work in low oxygen environments may be used. Best practices require that the LEL monitoring unit be equipped with a long sniffer tube to allow the LEL unit to remain outside the UST excavation.

When NAPL is present, Langan personnel are required to use disposable nitrile gloves at all times to prevent skin contact with contaminated materials. They should also consider having available a respirator and protective clothing (Tyvek® overalls), especially if NAPL is in abundance and there are high concentrations of VOCs.

All contaminated disposables including PPE and sampling equipment must be properly disposed of in labeled 55-gallon drums

3.6 Job Safety Analysis

A Job Safety Analysis (JSA) is a process to identify existing and potential hazards associated with each job or task so these hazards can be eliminated, controlled or minimized. A JSA will be performed at the beginning of each work day, and additionally whenever an employee begins a new task or moves to a new location. All JSAs must be developed and reviewed by

all parties involved. A blank JSA form and documentation of completed JSAs are in Attachment G.

4.0 PERSONNEL TRAINING

4.1 Basic Training

Completion of an initial 40-hour HAZWOPER training program as detailed in OSHA's 29 CFR 1910.120(e) is required for all employees working on a site engaged in hazardous substance removal or other activities which expose or potentially expose workers to hazardous substances, health hazards, or safety hazards as defined by 29 CFR 1910.120(a). Annual 8-hour refresher training is also required to maintain competencies to ensure a safe work environment. In addition to these training requirements, all employees must complete the OSHA 10 hour Construction Safety and Health training and supervisory personnel must also receive eight additional hours of specialized management training. Training records are maintained by the HSM.

4.2 Initial Site-Specific Training

Training will be provided to specifically address the activities, procedures, monitoring, and equipment for site operations at the beginning of each field mobilization and the beginning of each discrete phase of work. The training will include the site and facility layout, hazards, and emergency services at the site, and will detail all the provisions contained within this CHASP. For a HAZWOPER operation, training on the site must be for a minimum of 3 days. Specific issues that will be addressed include the hazards described in Section 3.0.

4.3 Tailgate Safety Briefings

Before starting work each day or as needed, the Langan HSO will conduct a brief tailgate safety meeting to assist site personnel in conducting their activities safely. Tailgate meetings will be documented in Attachment H. Briefings will include the following:

- Work plan for the day;
- Review of safety information relevant to planned tasks and environmental conditions;
- New activities/task being conducted;
- Results of Jobsite Safety Inspection Checklist;
- Changes in work practices;
- Safe work practices; and
- Discussion and remedies for noted or observed deficiencies.

5.0 MEDICAL SURVEILLANCE

All personnel who will be performing field work involving potential exposure to toxic and hazardous substances (defined by 29 CFR 1910.120(a)) will be required to have passed an initial baseline medical examination, with follow-up medical exams thereafter, consistent with 29 CFR 1910.120(f). Medical evaluations will be performed by, or under the direction of, a physician board-certified in occupational medicine.

Additionally, personnel who may be required to perform work while wearing a respirator must receive medical clearance as required under CFR 1910.134(e), *Respiratory Protection*. Medical evaluations will be performed by, or under the direction of, a physician board-certified in occupational medicine. Results of medical evaluations are maintained by the HSM.

6.0 COMMUNITY AIR MONITORING PROGRAM

Community air monitoring will be conducted in compliance with the NYSDOH Generic CAMP outlined below:

Monitoring for dust and odors will be conducted during all ground intrusive activities by the FTL. Continuous monitoring on the perimeter of the work zones for odor, VOCs, and dust may be required for all ground intrusive activities such as soil excavation and handling activities. The work zone is defined as the general area in which machinery is operating in support of remediation activities. A portable PID will be used to monitor the work zone and for periodic monitoring for VOCs during activities such as soil and groundwater sampling and soil excavation. The site perimeter will be monitored for fugitive dust emissions by visual observations as well as instrumentation measurements (if required). When required, particulate or dust will be monitored continuously with real-time field instrumentation that will meet, at a minimum, the performance standards from DER-10 Appendix 1B.

If VOC monitoring is required, the following actions will be taken based on VOC levels measured:

- If total VOC levels exceed 5 ppm above background for the 15-minute average at the perimeter, work activities will be temporarily halted and monitoring continued. If levels readily decrease (per instantaneous readings) below 5 ppm above background, work activities will resume with continued monitoring.
- If total VOC levels at the downwind perimeter of the hot zone persist at levels in excess of 5 ppm above background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps work activities will resume provided that the total organic vapor level 200 feet downwind of the hot zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less – but in no case less than 20 feet, is below 5 ppm above background for the 15-minute average.

- If the total VOC level is above 25 ppm at the perimeter of the hot zone, activities will be shutdown.

If dust monitoring with field instrumentation is required, the following actions will be taken based on instrumentation measurements:

- If the downwind particulate level is 100 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression must be employed. Work may continue with dust suppression techniques provided that downwind PM10 levels do not exceed 150 $\mu\text{g}/\text{m}^3$ above the background level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM10 levels are greater than 150 $\mu\text{g}/\text{m}^3$ above the background level, work must be stopped and a re-evaluation of activities initiated. Work can resume provided that dust suppression measures and other controls are successful in reducing the downwind PM10 concentration to within 150 $\mu\text{g}/\text{m}^3$ of the upwind level and in preventing visible dust migration.

6.1 Vapor Emission Response Plan

This section applies if VOC monitoring is required. If the ambient air concentration of organic vapors exceeds 5 ppm above background at the perimeter of the hot zone, boring and well installation, and excavation activities will be halted or odor controls will be employed, and monitoring continued. When work shut-down occurs, downwind air monitoring as directed by the HSO or FTL will be implemented to ensure that vapor emission does not impact the nearest residential or commercial structure at levels exceeding those specified in the Major Vapor Emission section.

If the organic vapor level decreases below 5 ppm above background, sampling and boring and well installation can resume, provided:

- The organic vapor level 200 feet downwind of the hot zone or half the distance to the nearest residential or commercial structure, whichever is less, is below 1 ppm over background, and
- More frequent intervals of monitoring, as directed by the HSO or FTL, are conducted.

6.2 Major Vapor Emission

This section applies if VOC monitoring is required. If any organic levels greater than 5 ppm over background are identified 200 feet downwind from the work site, or half the distance to the nearest residential or commercial property, whichever is less, all work activities must be halted or odor controls must be implemented.

If, following the cessation of the work activities, or as the result of an emergency, organic levels persist above 5 ppm above background 200 feet downwind or half the distance to the nearest residential or commercial property from the hot zone, then the air quality must be monitored within 20 feet of the perimeter of the nearest residential or commercial structure (20 Foot Zone).

If either of the following criteria is exceeded in the 20 Foot Zone, then the Major Vapor Emission Response Plan shall automatically be implemented.

- Sustained organic vapor levels approaching 5 ppm above background for a period of more than 30 minutes, or
- Organic vapor levels greater than 5 ppm above background for any time period.

6.3 Major Vapor Emission Response Plan

Upon activation, the following activities will be undertaken:

- The local police authorities will immediately be contacted by the HSO or FTL and advised of the situation;
- Frequent air monitoring will be conducted at 30-minute intervals within the 20 Foot Zone. If two successive readings below action levels are measured, air monitoring may be halted or modified by the HSO or FTL; and
- All Emergency contacts will go into effect as appropriate.

6.4 Dust Suppression Techniques

Preventative measures for dust generation may include wetting site fill and soil, construction of an engineered construction entrance with gravel pad, a truck wash area, covering soils with tarps, and limiting vehicle speeds to five miles per hour.

Work practices to minimize odors and vapors include limiting the time that the excavations remain open, minimizing stockpiling of contaminated-source soil, and minimizing the handling of contaminated material. Offending odor and organic vapor controls may include the application of foam suppressants or tarps over the odor or VOC source areas. Foam suppressants may include biodegradable foams applied over the source material for short-term control of the odor and VOCs.

If odors develop and cannot be otherwise controlled, additional means to eliminate odor nuisances will include: direct load-out of soils to trucks for off-Site disposal; use of chemical odorants in spray or misting systems; and, use of staff to monitor odors in surrounding neighborhoods.

Where odor nuisances have developed during remedial work and cannot be corrected, or

where the release of nuisance odors cannot otherwise be avoided due to on-site conditions or close proximity to sensitive receptors, odor control will be achieved by sheltering excavation and handling areas under tented containment structures equipped with appropriate air venting/filtering systems.

7.0 PERSONAL PROTECTIVE EQUIPMENT

7.1 Levels of Protection

Langan will provide PPE to Langan employees to protect them from the specific hazards they are likely to encounter on-site. Direct hired contractors will provide their employees with equivalent PPE to protect them from the specific hazards likely to be encountered on-site. Selection of the appropriate PPE must take into consideration: (1) identification of the hazards or suspected hazards; (2) potential exposure routes; and, (3) the performance of the PPE construction (materials and seams) in providing a barrier to these hazards.

Based on anticipated site conditions and the proposed work activities to be performed at the site, Level D protection will be used. The upgrading/downgrading of the level of protection will be based on continuous air monitoring results as described in Section 6.0 (when applicable). The decision to modify standard PPE will be made by the site HSO or FTL after conferring with the PM. The levels of protection are described below.

Level D Protection (as needed)

- Safety glasses with side shields or chemical splash goggles
- Safety boots/shoes
- Coveralls (Tyvek® or equivalent)
- Hard hat
- Long sleeve work shirt and work pants
- Nitrile gloves
- Hearing protection
- Reflective safety vest

Level C Protection (as needed)

- Full or Half face, air-purifying respirator, with NIOSH approved HEPA filter
- Inner (latex) and outer (nitrile) chemical-resistant gloves
- Safety glasses with side shields or chemical splash goggles
- Chemical-resistant safety boots/shoes

- Hard hat
- Long sleeve work shirt and work pants
- Coveralls (Tyvek® or equivalent)
- Hearing protection (as needed)
- Reflective safety vest

The action levels used in determining the necessary levels of respiratory protection and upgrading to Level C are summarized in Table 4. The written Respiratory Protection Program is maintained by the HSM and is available if needed. The monitoring procedures and equipment are outlined in Section 6.0 (when applicable).

7.2 Respirator Fit-Test

All Langan employees who may be exposed to hazardous substances at the work site are in possession of a full or half face-piece, air-purifying respirator and have been successfully fit-tested within the past year. Fit-test records are maintained by the HSM.

8.0 SITE CONTROL

8.1 Site Communications Plan

Verbal communications will be the primary method of communication used at the site during the remedial action/remedial investigation and routine groundwater monitoring work. Cell phones shall be used to the extent practical. In the instances where verbal communication cannot be used, such as when working in respiratory protective equipment, hand signals will be used. Hand signals will be covered during site-specific training. Hand signals and their messages:

Hand Signal	Meaning
Hand gripping throat	Out of air; cannot breathe
Grip partners wrists or place both hands around waist	Leave immediately without debate
Hands on top of head	Need assistance
Thumbs up	OK; I'm alright; I understand
Thumbs down	No; negative
Simulated "stick" break with fists	Take a break; stop work

8.2 Work Zones

The need to formally establish specific work zones (Support, Contamination Reduction, and Exclusion Zones) during site activities will be determined by the HSO or FTL. It is important for the safety of all concerned that appropriate barriers (cones, wooden horses, plastic fencing etc.)

are in place to keep vehicles and pedestrians away from the Work Zone.

8.2.1 Exclusion Zone

Exclusion zone or hot zones will be established within a 25 foot radius around drilling and sampling activities involving hazardous materials, where applicable and feasible. All personnel within the hot zone must don the appropriate levels of personal protection as set forth by the HSO. It is not anticipated that Level C or higher will be required for this site.

All personnel within the hot zone will be required to use the specified level of protection. No food, drink, or smoking will be allowed in the hot or warm zones.

8.2.2 Contamination Reduction Zone

If PID VOC concentration action levels are exceeded or obvious indications of contamination (by sight or odor) are encountered, a contamination reduction zone or warm zone will be established and utilized during the field activities. This zone will be established between the hot zone and the cold zone (discussed below), and will include the personnel and equipment necessary for decontamination of equipment and personnel exiting the hot zone. Personnel and equipment in the hot zone must pass through this zone before entering the cold zone. This zone should always be located upwind of the hot zone.

8.2.3 Support Zone

The support zone or cold zone will include the remaining areas of the job site. Break areas and support facilities (include equipment storage and maintenance areas) will be located in this zone. No equipment or personnel will be permitted to enter the cold zone from the hot zone without passing through the decontamination station in the warm zone (if necessitated). Eating, smoking, and drinking will be allowed only in this area.

8.3 The Buddy System

When working in teams of two or more, workers will use the "buddy system" for all work activities to ensure that rapid assistance can be provided in the event of an emergency. This requires work groups to be organized such that workers can remain close together and maintain visual contact with one another. Workers using the "buddy system" have the following responsibilities:

- Provide his/her partner with assistance.
- Observe his/her partner for signs of chemical or heat exposure.
- Periodically check the integrity of his/her partner's PPE.
- Notify the HSO or other site personnel if emergency service is needed.

9.0 NEAREST MEDICAL ASSISTANCE

The address and telephone number of the nearest hospital:

New York Downtown Hospital
170 William Street
New York, NY
212-312-5000

Map with directions to the hospital are shown in Figure 2. This information will either be posted prominently at the site or will be available to all personnel all of the time. Further, all field personnel, including the HSO & FTL, will know the directions to the hospital.

10.0 STANDING ORDERS/SAFE WORK PRACTICES

The standing orders, which consist of a description of safe work practices that must always be followed while on-site by Langan employees and contractors, are shown in Attachment A. The site HSO and FTL each have the responsibility for enforcing these practices. The standing orders will be posted prominently at the site, or are made available to all personnel at all times. Those who do not abide by these safe work practices will be removed from the site.

11.0 SITE SECURITY

No unauthorized personnel shall be permitted access to the work areas.

12.0 UNDERGROUND UTILITIES

As provided in Langan's Underground Utility Clearance Guidelines, the following safe work practices should be followed by Langan personnel and the contractor before and during subsurface work in accordance with federal, state and local regulations:

- Obtain available utility drawings from the property owner/client or operator.
- Provide utility drawings to the project team.
- In the field, mark the proposed area of subsurface disturbance (when possible).
- Ensure that the utility clearance system has been notified.
- Ensure that utilities are marked before beginning subsurface work.
- Discuss subsurface work locations with the owner/client and contractors.
- Obtain approval from the owner/client and operators for proposed subsurface work locations.
- Use safe digging procedures when applicable.

- Stay at least 10 feet from all equipment performing subsurface work.

13.0 SITE SAFETY INSPECTION

The Langan HSO or alternate will check the work area daily, at the beginning and end of each work shift or more frequently to ensure safe work conditions. The HSO or alternate must complete the Jobsite Safety Inspection Checklist, found in Attachment F. Any deficiencies shall be shared with the FTL, HSM and PM and will be discussed at the daily tailgate meeting.

14.0 HAND AND POWER TOOLS

All hand- and electric-power tools and similar equipment shall be maintained in a safe operating condition. All electric-power tools must be inspected before initial use. Damaged tools shall be removed immediately from service or repaired. Tools shall be used only for the purpose for which they were designed. All users must be properly trained in their safe operation.

15.0 DECONTAMINATION PLAN

15.1 General

All personnel, equipment, and samples leaving the contaminated area of the site must be decontaminated. Decontamination for this operation is achieved through physical removal and chemical detoxification/disinfection/sterilization. The first step in decontamination, however, is prevention and standard operating procedures have been established meant to minimize contact with wastes:

- Work habits that minimize contact with wastes are stressed.
- Disposable equipment, where appropriate, will be used.

15.2 Decontamination Procedures

Standard decontamination procedures will be used as described in Attachment B.

15.3 Disposal of Decontamination Wastes

Waste solutions generated during decontamination procedures shall be contained, collected, and stored in drums or other appropriate containers and labeled for proper off-site disposal.

16.0 EMERGENCY RESPONSE

16.1 General

Due to hazards that may be present at the site and the conditions under which operations are conducted, it is possible that an emergency situation may develop. Emergency situations can be characterized as injury or acute chemical exposure to personnel, fire or explosion,

environmental release, or hazardous weather conditions.

16.2 Responsibilities

Site Emergency Coordinator - The HSO, or his/her alternate, will serve as the Site Emergency Coordinator and shall implement emergency procedures whenever conditions warrant such action. The Site Emergency Coordinator will be responsible for assuring the evacuation, emergency treatment, emergency transport of site personnel, and notification of emergency units and the appropriate management staff. Emergency response instructions will be provided by the HSO as part of every employee's training prior to the start of work.

Employees - All employees at the site will be familiar with emergency response procedures for this work location.

16.3 Evacuation

In the event of an emergency situation, an air horn or vehicle horn will be sounded three times indicating the initiation of evacuation procedures. Loud voice command, if appropriate, can be used. All personnel will evacuate and assemble at the site entrance. No one, except the emergency responders, will be allowed to proceed into the area once the emergency signal has been given. The Site Emergency Coordinator will ensure that access for emergency equipment is provided and that all sources of combustion (e.g., operating machinery, etc.) have been shut down once the alarm has been sounded. Wind direction will be taken into consideration for evacuation plans. Evacuation plans will be discussed at the initial Site-Specific Training and as needed at the regular safety briefings.

In all situations, when an on-site emergency results in an evacuation, personnel shall not re-enter until:

- The conditions resulting in the emergency have been corrected.
- The hazards have been reassessed.
- This CHASP has been reviewed.
- Site personnel have been briefed on any changes to this CHASP.

16.4 Emergency Contacts/Notification System

The fire department and other emergency response groups will be notified by telephone of the emergency as soon as possible. An emergency telephone numbers list is presented as Table 5 in this CHASP. This list will either be posted prominently at the site or will be made readily available to all personnel all of the time.

16.5 Emergency Medical Treatment

Personnel Injury - In case of injury to personnel, the HSO or his/her alternate will immediately administer emergency first aid. The ambulance/rescue squad will also be contacted as necessary. Some situations may require transport of the injured parties by automobile. Therefore, maps/directions to the nearest hospital are provided as Figure 2. Figure 2 will either be posted at the site, or will be made readily available to all personnel all of the time.

Personnel Exposure – Emergency first aid procedures to be followed are:

- **Skin Contact:** Use copious amounts of soap and water. Wash/rinse affected areas thoroughly, and then provide appropriate medical attention. Rinse eyes with water for at least 15 minutes.
- **Inhalation:** Move to fresh air and/or, if necessary decontaminate and transport to emergency medical facility.
- **Ingestion:** Decontaminate and transport to emergency medical facility.
- **Puncture/Laceration:** Decontaminate, if possible, and transport to emergency medical facility.

16.6 Fire or Explosion

Appropriate fire extinguishers will be made available at the site for trained personnel to use on insipient stage fires without endangering the safety and health of those nearby. If the use of fire extinguishers will not extinguish the fire, immediately notify the fire department, sound the evacuation signal, and then evacuate the area, assembling at the site entrance to be accounted for and to receive further instruction.

16.7 Spills/Leaks

Control or stop the spread of minor chemical spills or contamination by utilizing the appropriate materials (absorbents, etc.), if possible. If the release is significant, or highly hazardous, immediately notify the appropriate response groups, sound the evacuation signal, evacuate the area, and assemble at the site entrance to be accounted for and to receive further instruction.

16.8 Adverse Weather Conditions

In the event of severe weather (rain, snow, sleet, heat, etc.), conditions will be assessed on site to determine if the work can proceed safely. If it is determined that the weather poses a significant hazard, site operations will be stopped and rescheduled. Some of the items to be considered prior to determining if work should continue include:

- Potential for heat stress and heat-related injuries.

- Potential for cold stress and cold-related injuries.
- Treacherous weather-related working conditions including thunder storms. When thunderstorms do occur, work is to cease immediately while personnel seek shelter. Work cannot resume until 30 minutes after the last thunder clap.
- Limited visibility.

16.9 Underground Utilities

In the event a utility is encountered or disturbed during subsurface work, follow these procedures:

- Immediately stop work;
- Leave the work area and retreat to a safe area;
- Call 911, if necessary;
- Contact the client representative and owner and operator of the property; and
- Immediately notify the Langan PM, HSC and Langan Incident/Injury Hotline.

16.10 Documentation

Immediately following an incident or near miss, unless emergency medical treatment is required, either the employee or a coworker must contact the Langan Incident/Injury Hotline at 1-(800)-9-LANGAN (ext. #4699) and the client representative to report the incident or near miss. For emergencies involving personnel injury and/or exposure, the HSO and affected employee will complete and submit an Employee Exposure/Injury Incident Report (Attachment C) to the Langan Corporate Health and Safety Manager as soon as possible following the incident.

17.0 CONFINED SPACE ENTRY

Confined spaces are not anticipated at the Site during planned construction activities. If confined spaces are identified, the contractor must implement their own confined space program that all applicable federal, state and local regulations. Confined spaces **will not** be entered by Langan personnel.

TABLES

**TABLE 1
TASK HAZARD ANALYSES**

Task	Hazard	Description	Control Measures	First Aid
1.3.1 – 1.3.10	Contaminated Soil or Groundwater- Dermal Contact	Contaminated water spills on skin, splashes in eyes; contact with contaminated soil/fill during construction activities or sampling.	Wear proper PPE; follow safe practices, maintain safe distance from construction activities	See Table 2, seek medical attention as required
1.3.1 – 1.3.10	Lacerations, abrasions, punctures	Cutting bailer twine, pump tubing, acetate liners, etc. with knife; cuts from sharp site objects or previously cut piles, tanks, etc.; Using tools in tight spaces	Wear proper PPE; follow safe practices	Clean wound, apply pressure and/or bandages; seek medical attention as required.
1.3.1 – 1.3.10	Contaminated Media Inhalation	Opening drums, tanks, wells; vapors for non-aqueous phase liquids or other contaminated site media; dust inhalation during excavation; vapor accumulation in excavation	Follow air monitoring plan; have quick access to respirator, do not move or open unlabeled drums found at the site, maintain safe distance from construction activities	See Table 2, seek medical attention as required
1.3.1 – 1.3.10	Lifting	Improper lifting/carrying of equipment and materials causing strains	Follow safe lifting techniques; Langan employees are not to carry contractor equipment or materials	Rest, ice, compression, elevation; seek medical attention as required
1.3.1 – 1.3.10	Slips, trips, and falls	Slips, trips and falls due to uneven surfaces, cords, steep slopes, debris and equipment in work areas	Good housekeeping at site; constant awareness and focus on the task; avoid climbing on stockpiles; maintain safe distance from construction activities and excavations; avoid elevated areas over six feet unless fully accredited in fall protection and wearing an approved fall protection safety apparatus	Rest, ice, compression, elevation; seek medical attention as required
1.3.1 – 1.3.10	Noise	Excavation equipment, hand tools, drilling equipment.	Wear hearing protection; maintain safe distance from construction activities	Seek medical attention as required
1.3.1 – 1.3.10	Falling objects	Soil material, tools, etc. dropping from drill rigs, front-end loaders, etc.	Hard hats to be worn at all times while in work zones; maintain safe distance from construction activities and excavations	Seek medical attention as required
1.3.1 – 1.3.6	Underground/ overhead utilities	Excavation equipment, drill rig auger makes contact with underground object; boom touches overhead utility	"One Call" before dig; follow safe practices; confirm utility locations with contractor; wear proper PPE; maintain safe distance from construction activities and excavations	Seek medical attention as required
1.3.1 – 1.3.10	Insects (bees, wasps, hornet, mosquitoes, and spider)	Sings, bites	Insect Repellent; wear proper protective clothing (work boots, socks and light colored pants);field personnel who may have insect allergies (e.g., bee sting) should provide this information to the HSO or FSO prior to commencing work, and will have allergy medication on Site.	Seek medical attention as required
1.3.1 – 1.3.10	Vehicle traffic / Heavy Equipment Operation	Vehicles unable to see workers on site, operation of heavy equipment in tight spaces, equipment failure, malfunctioning alarms	Wear proper PPE, especially visibility vest; use a buddy system to look for traffic; rope off area of work with cones and caution tape or devices at points of hazard, maintain safe distance from construction activities and equipment	Seek medical attention as required

**TABLE 2
CONTAMINANT HAZARDS OF CONCERN**

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	1,2,4-Trimethylbenzene	95-63-6	PID	None None	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat, respiratory system; bronchitis; hypochromic anemia; headache, drowsiness, lassitude (weakness, exhaustion), dizziness, nausea, incoordination; vomiting, confusion; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	1,3,5-Trimethylbenzene Mesitylene sym-Trimethylbenzene	108-67-8	PID	None None	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat, respiratory system; bronchitis; hypochromic anemia; headache, drowsiness, lassitude (weakness, exhaustion), dizziness, nausea, incoordination; vomiting, confusion; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	1,3-Butadiene Biethylene Bivinyll Butadiene Divinyll Erythrene Vinylethylene	106-99-0	PID	1 ppm 2000 ppm	Vapor	inhalation, skin and/or eye contact (liquid)	irritation to the eyes, nose, throat; drowsiness, dizziness; liquid: frostbite; teratogenic, reproductive effects; [potential occupational carcinogen]	Eye: Frostbite Skin: Frostbite Breathing: Respiratory support

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	1,1-Dichloroethane Asymmetrical dichloroethane Ethylidene chloride 1,1-Ethylidene dichloride 1,1-DCA	75-34-3	PID	100 ppm 3000 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the skin; central nervous system depression; liver, kidney, lung damage	Eye: Irrigate immediately Skin: Soap flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	p-Dichlorobenzene p-DCB 1,4-Dichlorobenzene para-Dichlorobenzene Dichlorocide	106-46-7	PID	75 ppm 150 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, swelling periorbital (situated around the eye); profuse rhinitis; headache, anorexia, nausea, vomiting; weight loss, jaundice, cirrhosis; in animals: liver, kidney injury; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	1,3-Dichlorobenzene 1,3-Dichlorobenzene; m- Dichlorobenzol; m-Phenylene dichloride	541-73-1	PID	None None	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, swelling periorbital (situated around the eye); profuse rhinitis; headache, anorexia, nausea, vomiting; weight loss, jaundice, cirrhosis; in animals: liver, kidney injury; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	1,4-Dichlorobenzene para-Dichlorobenzene p-Dichlorobenzene p-DCB PDB Paramoth Para crystals Paracide Dichlorocide	106-46-7	PID	75 ppm 150 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, swelling periorbital (situated around the eye); profuse rhinitis; headache, anorexia, nausea, vomiting; weight loss, jaundice, cirrhosis; in animals: liver, kidney injury; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	2-Butanone, Ethyl methyl ketone MEK Methyl acetone Methyl ethyl ketone	78-93-3	PID	200 ppm 3000 ppm	Soil Groundwater Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose; headache; dizziness; vomiting; dermatitis	Eye: Irrigate immediately Skin: Water wash immediately Breathing: Fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.10	2-Hexanone Butyl methyl ketone MBK Methyl butyl ketone Methyl n-butyl ketone	591-78-6	PID	100 ppm 1600 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, nose; peripheral neuropathy: lassitude (weakness, exhaustion), paresthesia; dermatitis; headache, drowsiness	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	4-Methyl-2-Pentanone Hexone Isobutyl methyl ketone Methyl isobutyl ketone MIBK	108-10-1	PID	100 ppm 500 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, mucous membrane; headache, narcosis, coma; dermatitis; in animals: liver, kidney damage	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	4-Isopropyltoluene 1-Methyl-4-(1-methylethyl)benzene 4-Isopropyltoluene; 4-Methylcumene; Paracymene p-Cymene p-Isopropyltoluene	99-87-6	PID	NA NA	Soil Groundwater Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, mucous membrane; dermatitis; headache, narcosis, coma	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Acenaphthene 1,2-Dihydroacenaphthylene 1,8-Ethylenenaphthalene peri-Ethylenenaphthalene Naphthyleneethylene Tricyclododecapentaene	83-32-9	PID	NA NA	Soil	inhalation, ingestion, skin and/or eye contact,	irritation to the skin, eyes, mucous membranes and upper respiratory tract; If ingested, it can cause vomiting	Eye: Irrigate immediately Skin: Soap wash immediately, if redness or irritation develop, seek medical attention immediately Breathing: Move to fresh air Swallow: do not induce vomiting, seek medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Acenaphthylene Cyclopenta(de)naphthalene, Acenaphthalene	208-96-8	PID	NA NA	Soil	inhalation, ingestion, skin and/or eye contact	irritation to the skin, eyes, mucous membranes and upper respiratory tract	Eye: Irrigate immediately, seek medical attention immediately, Skin: Soap wash immediately, if redness or irritation develop, seek medical attention immediately Breathing: Move to fresh air Swallow: do not induce vomiting, seek medical attention immediately
1.3.1 – 1.3.10	Acetone Dimethyl ketone Ketone propane 2-Propanone	67-64-1	PID	1000 ppm 2500 ppm	Groundwater Soil	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, nose, throat; headache, dizziness, central nervous system depression; dermatitis	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Anthracene	120-12-7	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin or eye contact, ingestion	irritation to the skin, eyes, mucous membranes and upper respiratory tract, abdominal pain if ingested.	Eye: Irrigate immediately, seek medical attention immediately, Skin: Soap wash immediately, Breathing: Move to fresh air, refer to medical attention; Swallow: refer to medical attention

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Benzene Benzol Phenyl hydride	71-43-2	PID	3.19 mg/m ³ 1,595 mg/mg	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, respiratory system; dizziness; headache, nausea, staggered gait; lassitude (weakness, exhaustion) [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Benzo(a)anthracene Benzanthracene Benzanthrene 1,2-Benzanthracene Benzo(b)phenanthrene Tetraphene	56-55-3	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, skin or eye contact, ingestion	dermatitis, bronchitis, [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Benzo(a)pyrene	50-32-8	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin or eye contact, ingestion	dermatitis, bronchitis, [potential occupational carcinogen]	Eye: Irrigate immediately, seek medical attention Skin: Soap wash immediately; Breathing: move to fresh air; Swallow: Induce vomiting if conscious, seek medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Benzo(b)fluoranthene	205-99-2	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin or eye contact, ingestion	irritation to eyes and skin, respiratory irritation(dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.10	Benzo (ghi) perylene	191-24-2	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin or eye contact, ingestion	NA	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.10	Benzo (k) fluoranthene	207-08-9	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin or eye contact, ingestion	irritation to eyes and skin, respiratory irritation (dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Methyl Bromide Bromomethane Monobromomethane	74-83-9	PID	20 ppm 250 ppm	Soil Groundwater Vapor	inhalation, skin absorption (liquid), skin and/or eye contact (liquid)	irritation to the eyes, skin, respiratory system; muscle weak, incoordination, visual disturbance, dizziness; nausea, vomiting, headache; malaise (vague feeling of discomfort); hand tremor; convulsions; dyspnea (breathing difficulty); skin vesiculation; liquid: frostbite; [potential occupational carcinogen]	Eye: Irrigate immediately (liquid) Skin: Water flush immediately (liquid) Breathing: Respiratory support
1.3.1 – 1.3.10	Carbazole 9-azafluorene Dibenzopyrrole Diphenylenimine diphenyleneimide	86-74-8	None	NA NA	Soil	inhalation, skin absorption (liquid), skin and/or eye contact	irritation to eyes and skin, respiratory irritation	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.10	Carbon disulfide Carbon bisulfide	75-15-0	PID	20 ppm 500 ppm	Soil Groundwater Vapor	inhalation, skin or eye contact, ingestion	irritation to the eyes, skin, respiratory system	Eye: Irrigate immediately (liquid) Skin: Water flush immediately (liquid) Breathing: Respiratory support

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Carbon tetrachloride Carbon chloride Carbon tet Freon® 10 Halon® 104 Tetrachloromethane	56-23-5	PID	10 ppm 200 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin; central nervous system depression; nausea, vomiting; liver, kidney injury; drowsiness, dizziness, incoordination; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Chloroform Methane trichloride Trichloromethane	67-66-3	None	50 ppm 500 ppm	Groundwater Soil	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin; dizziness, mental dullness, nausea, confusion; headache, lassitude (weakness, exhaustion); anesthesia; enlarged liver; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Cis-Chlordane α-Chlordane cis-Chlordan CIS-CHLORDANE Chlordane cis-;Chlordane cis-;ALPHA-CHLORDAN Chlordan, cis-;ALPHA-CHLORDANE;alpha(cis)-chlordane α-chlordane solution	5102-71-9	None	0.5 mg/m ³ 100 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin and/or eye contact	Blurred vision; confusion; ataxia, delirium; cough; abdominal pain, nausea, vomiting, diarrhea; irritability, tremor, convulsions; anuria	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Methyl Chloride Chloromethane Monochloromethane	74-87-3	NA	100 ppm 2000 ppm	Groundwater Soil	inhalation, skin and/or eye contact	dizziness, nausea, vomiting; visual disturbance, stagger, slurred speech, convulsions, coma; liver, kidney damage; liquid: frostbite; reproductive, teratogenic effects; [potential occupational carcinogen]	Eye: Frostbite Skin: Frostbite Breathing: Respiratory support
1.3.1 – 1.3.10	Chrysene Benzol[a]phenanthrene 1,2-Benzphenanthrene	218-01-9	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, absorption, ingestion, consumption	irritation to eye, skin, and respiratory, gastrointestinal irritation nausea, vomit, diarrhea [potential occupational carcinogen]	Eyes: Irrigate immediately Skin: Soap wash promptly. Breath: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	1,2-Dichloroethylene 1,2-DCE mixture of cis and trans Acetylene dichloride cis-Acetylene dichloride trans-Acetylene dichloride sym-Dichloroethylene cis- 1,2-Dichloroethene Trans-1,2-Dichloroethylene, tDCE cDCE cis-1,2-Dichloroethene	540-59-0	PID	200 ppm 1000 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, respiratory system; central nervous system depression	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Dieldrin HEOD 1,2,3,4,10,10-Hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octahydro-1,4-endo-exo-5,8-dimethanonaphthalene	60-57-1	PID	0.25 mg/m ³ 50 mg/m ³	Groundwater Soil Water	inhalation, skin absorption, ingestion, skin and/or eye contact	headache, dizziness; nausea, vomiting, malaise (vague feeling of discomfort), sweating; myoclonic limb jerks; clonic, tonic convulsions; coma; [potential occupational carcinogen]; in animals: liver, kidney damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Dioxane Diethylene dioxide Diethylene ether Dioxan p-Dioxane 1,4-Dioxane	123-91-1	PID	100 ppm 500 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat; drowsiness, headache; nausea, vomiting; liver damage; kidney failure; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Water wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	m-Cresol 3-methylphenol meta-Cresol 3-Cresol m-Cresylic acid 1-Hydroxy-3-methylbenzene 3-Hydroxytoluene 3-Methyl phenol	108-39-4	PID	5 ppm 250 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, mucous membrane; central nervous system effects: confusion, depression, resp failure; dyspnea (breathing difficulty), irreg rapid resp, weak pulse; eye, skin burns; dermatitis; lung, liver, kidney, pancreas damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	o-Cresol ortho-Cresol 2-Cresol o-Cresylic acid 1-Hydroxy-2-methylbenzene 2-Hydroxytoluene 2-Methyl phenol	95-48-7	PID	5 ppm 250 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, mucous membrane; central nervous system effects: confusion, depression, resp failure; dyspnea (breathing difficulty), irreg rapid resp, weak pulse; eye, skin burns; dermatitis; lung, liver, kidney, pancreas damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	p-Cresol para-Cresol 4-Cresol p-Cresylic acid 1-Hydroxy-4-methylbenzene 4-Hydroxytoluene 4-Methyl phenol	106-44-5	PID	5 ppm 250 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, mucous membrane; central nervous system effects: confusion, depression, resp failure; dyspnea (breathing difficulty), irreg rapid resp, weak pulse; eye, skin burns; dermatitis; lung, liver, kidney, pancreas damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Cyclohexane Benzene hexahydride Hexahydrobenzene Hexamethylene Hexanaphthene	110-82-7	PID	300 ppm 1300 ppm	Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, respiratory system; drowsiness; dermatitis; narcosis, coma	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Sec-Butylcyclohexane (1-methylpropyl)-Cyclohexane 2-Cyclohexylbutane Cyclohexane sec-butyl-cyclohexane 1-methylpropyl)-;-s- Butylcyclohexane	7058-01-7	NA	NA NA	Soil	inhalation, ingestion, skin and/or eye contact	Irritant to eyes, skin, mucous membranes and respiratory system. May be harmful by ingestion, inhalation or skin absorption.	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Dibenzo (a,h) anthracene	53-70-3	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, absorption, ingestion, consumption	irritation to eyes, skin, respiratory, and digestion [potential occupational carcinogen]	Eyes: Irrigate immediately Skin: Soap wash promptly. Breath: Respiratory support PID Swallow: Medical attention immediately
1.3.1 – 1.3.10	Dibenzofuran	132-64-9	None	NA NA	Soil	inhalation, absorption	irritation to eyes, and skin	Eyes: Irrigate immediately Skin: Soap wash promptly.
1.3.1 – 1.3.10	Bis(2-ethylhexyl) phthalate Di-sec octyl phthalate DEHP Di(2-ethylhexyl)phthalate Octyl phthalate	117-81-7	None	5 mg/m ³ 5000 mg/m ³	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, mucous membrane; in animals: liver damage; teratogenic effects; [potential occupational carcinogen	Eye: Irrigate immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Dichlorodifluoromethane Difluorodichloromethane, Fluorocarbon 12, Freon® 12, Genetron® 12, Halon® 122, Propellant 12, Refrigerant 12	75-71-8	None	1000 pp, 15,000 ppm	Groundwater Soil Vapor	inhalation, skin and/or eye contact (liquid)	dizziness, tremor, asphyxia, unconsciousness, cardiac arrhythmias, cardiac arrest; liquid: frostbite	Eye: Frostbite Skin: Frostbite Breathing: Respiratory support

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	4,4'-DDD Dichlorodiphenyldichloroethane 1,1'-(2,2-Dichloroethylidene)bis (4-chlorobenzene)	72-54-8	None	NA NA	Groundwater Soil	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin; paresthesia tongue, lips, face; tremor; anxiety, dizziness, confusion, malaise (vague feeling of discomfort), headache, lassitude (weakness, exhaustion); convulsions; paresis hands; vomiting; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	DDT 4,4-DDT p,p'-DDT Dichlorodiphenyltrichloroethane 1,1,1-Trichloro-2,2-bis(p-chlorophenyl)ethane	50-29-3	None	1 mg/m ³ 500 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin; paresthesia tongue, lips, face; tremor; anxiety, dizziness, confusion, malaise (vague feeling of discomfort), headache, lassitude (weakness, exhaustion); convulsions; paresis hands; vomiting; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	DDE 4,4-DDE 1,1-bis-(4-chlorophenyl)-2,2-dichloroethene Dichlorodiphenyldichloroethene	72-55-9	None	NA NA	Soil	inhalation, skin absorption, ingestion, skin and/or eye contact	Oral ingestion of food is the primary source of exposure for the general population. Acute and chronic ingestion may cause nausea, vomiting, diarrhea, stomach pain, headache, dizziness, disorientation, tingling sensation, kidney damage, liver damage, convulsions, coma, and death. 4,4' DDE may cross the placenta and can be excreted in breast milk	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Ethylbenzene Ethylbenzol Phenylethane	100-40-4	PID	435 mg/m ³ 3,472 mg/m ³	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, mucous membrane; headache; dermatitis; narcosis, coma	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Fluoranthene Benzo(j, k)fluorene	206-44-0	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, skin or eye contact, ingestion	irritation to eyes and skin, respiratory irritation(dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Fluorene	86-73-7	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin or eye contact, ingestion	irritation to eyes and skin, respiratory irritation(dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.10	Heptane n-Heptane	142-82-5	PID	500 ppm 750 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	dizziness, stupor, incoordination; loss of appetite, nausea; dermatitis; chemical pneumonitis (aspiration liquid); unconsciousness	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Hexachlorobenzene Perchlorobenzene Pentachlorophenylchloride Benzene hexachloride Phenyl perchloryl HCB BHC	118-74-1	NA	NA NA	Groundwater Soil	inhalation, ingestion, skin and/or eye contact	Irritating to eyes, skin and mucous membranes. Prolonged periods of ingestion may cause cutaneous porphyria	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Indeno[1,2,3-cd]pyrene	193-39-5	None	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, absorption, ingestion, consumption	irritation to eyes, skin, respiratory, and digestion [potential occupational carcinogen]	Eyes: Irrigate immediately Skin: Soap wash promptly. Breath: Respiratory support Swallow: Medical attention immediately, wash mouth with water
1.3.1 – 1.3.10	Isopropyl alcohol Carbinol IPA Isopropanol 2-Propanol sec-Propyl alcohol Rubbing alcohol	67-63-0	PID	400 ppm 2000 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, nose, throat; drowsiness, dizziness, headache; dry cracking skin; in animals: narcosis	Eye: Irrigate immediately Skin: Water flush Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Methane Tetrahydridocarbon Carbane Marsh Gas Natural Gas Carbon tetrahydride Hydrogen carbide	74-82-8	PID	NA NA	Groundwater Soil Vapor	inhalation, skin and/or eye contact (liquid)	dizziness, confusion, excitation, asphyxia; liquid: frostbite	Eye: Frostbite Skin: Frostbite Breathing: Respiratory support
1.3.1 – 1.3.10	Methylene Chloride Dichloromethane Methylene dichloride	75-09-2	PID	25 ppm 2300 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin; lassitude (weakness, exhaustion), drowsiness, dizziness; numb, tingle limbs; nausea; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Methyl chloroform Chloroethene 1,1,1-Trichloroethane 1,1,1-Trichloroethane (stabilized) 1,1,1-TCA	71-55-6	PID	350 ppm 700 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin; headache, lassitude (weakness, exhaustion), central nervous system depression, poor equilibrium; dermatitis; cardiac arrhythmias; liver damage	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention
1.3.1 – 1.3.10	Naphthalene Naphthalin Tar camphor White tar	91-20-3	PID	50 mg/m ³ 250 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes; headache, confusion, excitement, malaise (vague feeling of discomfort); nausea, vomiting, abdominal pain; irritation bladder; profuse sweating; hematuria (blood in the urine); dermatitis, optical neuritis	Eye: Irrigate immediately Skin: Molten flush immediately/solid-liquid soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	n-Butylbenzene	104-51-8	PID	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin; dry nose, throat; headache; low blood pressure, tachycardia, abnormal cardiovascular system stress; central nervous system, hematopoietic depression; metallic taste; liver, kidney injury	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	n-Hexane Hexane, Hexyl hydride, normal-Hexane	110-54-3	PID	500 ppm 1100 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, nose; nausea, headache; peripheral neuropathy; numb extremities, muscle weak; dermatitis; dizziness; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	n-Propylbenzene Isocumene Propylbenzene 1-Phenylpropane 1-Propylbenzene Phenylpropane	103-65-1	PID	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin; dry nose, throat; headache; low blood pressure, tachycardia, abnormal cardiovascular system stress; central nervous system, hematopoietic depression; metallic taste; liver, kidney injury	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Phenanthrene	85-01-8	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, skin or eye contact, ingestion	irritation to eyes and skin, respiratory irritation(dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Pyrene benzo[def]phenanthrene	129-00-0	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, skin or eye contact, ingestion	irritation to eyes and skin, respiratory irritation(dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.10	Phenol Carbolic acid Hydroxybenzene, Monohydroxybenzene Phenyl alcohol Phenyl hydroxide	108-95-2	PID	5 ppm 250 ppm	Groundwater Soil	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, nose, throat; anorexia, weight loss; lassitude (weakness, exhaustion), muscle ache, pain; dark urine, skin burns; dermatitis; tremor, convulsions, twitching	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Propylene Propene Methyl ethylene	115-07-1	PID	NA NA	Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, nose, throat, skin burns asphyxiation	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Styrene Ethenyl benzene Phenylethylene Styrene monomer Styrol Vinyl benzene	100-42-5	PID	100 ppm 700 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, nose, respiratory system; headache, lassitude (weakness, exhaustion), dizziness, confusion, malaise (vague feeling of discomfort), drowsiness, unsteady gait; narcosis; defatting dermatitis; possible liver injury; reproductive effects	Eye: Irrigate immediately Skin: Water flush Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Tetrachloroethane 1,1,2,2-Tetrachloroethane Acetylene tetrachloride Symmetrical tetrachloroethane	79-34-5	PID	5 ppm 100 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	nausea, vomiting, abdominal pain; tremor fingers; jaundice, hepatitis, liver tenderness; dermatitis; leukocytosis (increased blood leukocytes); kidney damage; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Tetrachloroethylene Perchloroethylene Perchloroethylene PCE Perk Tetrachloroethylene Tetrachloroethene	127-18-4	PID	100 ppm 150 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat, respiratory system; nausea; flush face, neck; dizziness, incoordination; headache, drowsiness; skin erythema (skin redness); liver damage; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Toluene Methyl benzene Methyl benzol Phenyl methane Toluol	108-88-3	PID	200 ppm 500 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, nose; lassitude (weakness, exhaustion), confusion, euphoria, dizziness, headache; dilated pupils, lacrimation (discharge of tears); anxiety, muscle fatigue, paresthesia; dermatitis	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Trichloroethylene Ethylene trichloride TCE Trichloroethene Trilene	79-01-6	PID	100 ppm 1000 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin; headache, visual disturbance, lassitude (weakness, exhaustion), dizziness, tremor, drowsiness, nausea, vomiting; dermatitis; cardiac arrhythmias, paresthesia; liver injury; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Trichlorofluoromethane Fluorotrichloromethane Freon® 11 Monofluorotrichloromethane Refrigerant 11 Trichloromonofluoromethane	75-69-4	PID	1000 ppm 2000 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	incoordination, tremor; dermatitis; cardiac arrhythmias, cardiac arrest; asphyxia; liquid: frostbite	Eye: Irrigate immediately Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Vinylidene chloride 1,1-DCE 1,1-Dichloroethene 1,1-Dichloroethylene VDC Vinylidene chloride monomer Vinylidene dichloride	75-35-4	PID	NA NA	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, throat; dizziness, headache, nausea, dyspnea (breathing difficulty); liver, kidney disturbance; pneumonitis; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Total PCBs Chlorodiphenyl (42% chlorine) Aroclor® 1242 PCB Polychlorinated biphenyl	53469-21-9	None	0.5 mg/m ³ 5 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, chloracne	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	o-Xylene 1,2-Dimethylbenzene ortho-Xylene o-Xylol	95-47-6	PID	100 ppm 900 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat; dizziness, excitement, drowsiness, incoordination, staggering gait; corneal vacuolization; nausea, vomiting, abdominal pain; dermatitis	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	m-Xylene 1,3-Dimethylbenzene m-Xylol Metaxylene	108-38-3	PID	100 ppm 900 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat; dizziness, excitement, drowsiness, incoordination, staggering gait; corneal vacuolization; nausea, vomiting, abdominal pain; dermatitis	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	p-Xylene 1,4-Dimethylbenzene para-Xylene p-Xylol	106-42-3	PID	100 ppm 900 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat; dizziness, excitement, incoordination, staggering gait; corneal vacuolization; nausea, vomiting, abdominal pain; dermatitis	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Xylenes Dimethylbenzene Xylol	1330-20-7	PID	100 ppm 900 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat; dizziness, excitement, drowsiness, incoordination, staggering gait; corneal vacuolization; nausea, vomiting, abdominal pain; dermatitis	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Gasoline	8006-61-9	PID	NA NA	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin, mucous membrane; dermatitis; headache, lassitude (weakness, exhaustion), blurred vision, dizziness, slurred speech, confusion, convulsions; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Fuel Oil No. 2	68476-30-2	PID	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat; burning sensation in chest; headache, nausea, lassitude (weakness, exhaustion), restlessness, incoordination, confusion, drowsiness; vomiting, diarrhea; dermatitis; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Diesel Fuel automotive diesel fuel oil No. 2 distillate diesoline diesel oil diesel oil light diesel oil No. 1-D summer diesel	68334-30-5	PID	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat; burning sensation in chest; headache, nausea, lassitude (weakness, exhaustion), restlessness, incoordination, confusion, drowsiness; vomiting, diarrhea; dermatitis; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Aluminum	7429-90-5	None	0.5 mg/m3 50 mg/m3	Soil	inhalation, skin and/or eye contact	irritation to the eyes, skin, respiratory system	Eye: Irrigate immediately Breathing: Fresh air

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Arsenic	NA	None	0.5 mg/m ³ NA	Groundwater Soil	inhalation, ingestion, skin and/or eye contact	irritation skin, possible dermatitis; resp distress; diarrhea; muscle tremor, convulsions; possible gastrointestinal tract	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Barium	10022-31-8	None	0.5 mg/m ³ 50 mg/m ³	Groundwater Soil	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, upper respiratory system; skin burns; gastroenteritis; muscle spasm; slow pulse	Eye: Irrigate immediately Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Beryllium	7440-41-7	None	0.002 mg/m ³ 4 mg/m ³	Soil	inhalation, skin and/or eye contact	berylliosis (chronic exposure): anorexia, weight loss, lassitude (weakness, exhaustion), chest pain, cough, clubbing of fingers, cyanosis, pulmonary insufficiency; irritation to the eyes; dermatitis; [potential occupational carcinogen]	Eye: Irrigate immediately Breathing: Fresh air

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Cadmium	7440-43-9	None	0.005 mg/m ³ 9 mg/m ³	Soil	inhalation, ingestion	pulmonary edema, dyspnea (breathing difficulty), cough, chest tightness, substernal (occurring beneath the sternum) pain; headache; chills, muscle aches; nausea, vomiting, diarrhea; anosmia (loss of the sense of smell), emphysema, proteinuria, mild anemia; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Calcium	7440-70-2	None	NA	Groundwater Soil	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, upper resp tract; ulcer, perforation nasal septum; pneumonitis; dermatitis	Eye: Irrigate immediately Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Chromium Hexavalent- Trivalent-	7440-47-3	None	1.0 mg/m ³ 250 mg/m ³	Groundwater Soil	inhalation absorption ingestion	irritation to eye, skin, and respiratory	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Cobalt	7440-48-4	None	0.1 mg/m ³ 20 mg/m ³	Soil	inhalation, ingestion, skin and/or eye contact	Cough, dyspnea (breathing difficulty), wheezing, decreased pulmonary function; weight loss; dermatitis; diffuse nodular fibrosis; resp hypersensitivity, asthma	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Copper	7440-50-8	None	1.0 mg/m ³ 100 mg/m ³	Groundwater Soil	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, nose, metallic taste; dermatitis; anemia	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Cyanide	57-12-5	None	5 mg/m ³ 25 mg/m ³	Groundwater Soil	inhalation, ingestion, skin and/or eye contact	Exposure to cyanide can cause weakness, headaches, confusion, dizziness, fatigue, anxiety, sleepiness, nausea and vomiting. Breathing can speed up then become slow and gasping. Coma and convulsions also occur. If large amounts of cyanide have been absorbed by the body, the person usually collapses and death can occur very quickly. Long-term exposure to lower levels of cyanide can cause skin and nose irritation, itching, rashes and thyroid changes.	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Iron	7439-89-6	None	10 mg/m ³ NA	Groundwater Soil	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, mucous membrane; abdominal pain, diarrhea, vomiting	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Lead	7439-92-1	None	0.050 mg/m ³ 100 mg/m ³	Groundwater Soil	inhalation, ingestion, skin and/or eye contact	lassitude (weakness, exhaustion), insomnia; facial pallor; anorexia, weight loss, malnutrition; constipation, abdominal pain, colic; anemia; gingival lead line; tremor; paralysis wrist, ankles; encephalopathy; kidney disease; irritation to the eyes; hypertension	Eye: Irrigate immediately Skin: Soap flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Manganese	7439-96-5	None	5 mg/m ³ 500 mg/m ³	Groundwater Soil	inhalation, ingestion	aerosol is irritating to the respiratory tract	Eye: Irrigate immediately Skin: Soap flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Magnesium	7439-95-4	None	15 mg/m ³ NA	Soil	inhalation, skin and/or eye contact	irritation to the eyes, skin, respiratory system; cough	Eye: Irrigate immediately Breathing: Fresh air

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Mercury	7439-97-6	None	0.1 mg/m ³ 10 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin and/or eye contact	irritation to the eyes, skin; cough, chest pain, dyspnea (breathing difficulty), bronchitis, pneumonitis; tremor, insomnia, irritability, headache, lassitude (weakness, exhaustion); stomatitis, salivation; gastrointestinal disturbance, anorexia, weight loss; proteinuria	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Nickel	7440-02-0	None	NA 10 mg/m ³	Groundwater Soil	ion, ingestion, skin and/or eye contact	sensitization dermatitis, allergic asthma, pneumonitis; [potential occupational carcinogen]	Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Potassium	7440-09-7	None	NA NA	Soil	inhalation, skin absorption, ingestion, skin and/or eye contact inhalation, ingestion, skin and/or eye contact	eye: Causes eye burns. Skin: Causes skin burns. Reacts with moisture in the skin to form potassium hydroxide and hydrogen with much heat. ingestion: Causes gastrointestinal tract burns. inhalation: May cause irritation of the respiratory tract with burning pain in the nose and throat, coughing, wheezing, shortness of breath and pulmonary edema. Causes chemical burns to the respiratory tract. inhalation may be fatal as a result of spasm, inflammation, edema of the larynx and bronchi, chemical pneumonitis and pulmonary edema.	Eyes: Get medical aid immediately Skin: Get medical aid immediately. Immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. ingestion: If victim is conscious and alert, give 2-4 full cups of milk or water. Get medical aid immediately. inhalation: Get medical aid immediately.
1.3.1 – 1.3.10	Selenium	7782-49-2	None	1 mg/m ³ 0.2 mg/m ³	Soil	inhalation, ingestion, skin and/or eye contact	irritation to the eyes, skin, nose, throat; visual disturbance; headache; chills, fever; dyspnea (breathing difficulty), bronchitis; metallic taste, garlic breath, gastrointestinal disturbance; dermatitis; eye, skin burns; in animals: anemia; liver necrosis, cirrhosis; kidney, spleen damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Sodium	7440-23-5	None	NA NA	Groundwater Soil	ion, ingestion, skin and/or eye contact	sensitization dermatitis, allergic asthma, pneumonitis; [potential occupational carcinogen]	Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Thallium	7440-28-0	None	0.1 mg/m ³ 15 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin and/or eye contact	nausea, diarrhea, abdominal pain, vomiting; ptosis, strabismus; peri neuritis, tremor; retrosternal (occurring behind the sternum) tightness, chest pain, pulmonary edema; convulsions, chorea, psychosis; liver, kidney damage; alopecia; paresthesia legs	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.10	Vanadium	7440-62-2	None	0.1 mg/m ³ 15 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin and/or eye contact	nausea, diarrhea, abdominal pain, vomiting; ptosis, strabismus; peri neuritis, tremor; retrosternal (occurring behind the sternum) tightness, chest pain, pulmonary edema; convulsions, chorea, psychosis; liver, kidney damage; alopecia; paresthesia legs	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.10	Zinc	7440-62-2	None	15 mg/m ³ 500 mg/m ³	Groundwater Soil	inhalation	chills, muscle ache, nausea, fever, dry throat, cough; lassitude (weakness, exhaustion); metallic taste; headache; blurred vision; low back pain; vomiting; malaise (vague feeling of discomfort); chest tightness; dyspnea (breathing difficulty), rales, decreased pulmonary function	Breathing: Respiratory support
1.3.1 – 1.3.10	Non-Flammable Gas Mixture CALGAS (Equipment Calibration Gas : Oxygen Methane Hydrogen Sulfide Carbon Monoxide Nitrogen	7782-44-7 74-82-8 7783-08-4 830-08-0 7727-37-9	Multi-Gas PID	NA/NA NA/NA 10/100 ppm 50/1200 ppm NA/NA	NA	inhalation	dizziness, headache, and nausea	Breathing: Respiratory support
1.3.1 – 1.3.10	Non-Flammable Gas Mixture CALGAS (Equipment Calibration Gas : Oxygen Isobutylene Nitrogen	7782-44-7 115-11-7 7727-37-9	PID	NA/NA NA/NA NA/NA	NA	inhalation	dizziness, headache, and nausea	Breathing: Respiratory support

EXPLANATION OF ABBREVIATIONS

PID = Photoionization Detector

PEL = Permissible Exposure Limit (8-hour Time Weighted Average

IDLH = Immediately Dangerous to Life and Health

ppm = part per million

mg/m^3 = milligrams per cubic meter
500 mg/m^3

TABLE 3
Summary of Monitoring Equipment

Instrument	Operation Parameters
Photoionization Detector (PID)	<p>Hazard Monitored: Many organic and some inorganic gases and vapors.</p> <p>Application: Detects total concentration of many organic and some inorganic gases and vapors. Some identification of compounds is possible if more than one probe is measured.</p> <p>Detection Method: Ionizes molecules using UV radiation; produces a current that is proportional to the number of ions.</p> <p>General Care/Maintenance: Recharge or replace battery. Regularly clean lamp window. Regularly clean and maintain the instrument and accessories.</p> <p>Typical Operating Time: 10 hours. 5 hours with strip chart recorder.</p>
Oxygen Meter	<p>Hazard Monitored: Oxygen (O₂).</p> <p>Application: Measures the percentage of O₂ in the air.</p> <p>Detection Method: Uses an electrochemical sensor to measure the partial pressure of O₂ in the air, and converts the reading to O₂ concentration.</p> <p>General Care/Maintenance: Replace detector cell according to manufacturer's recommendations. Recharge or replace batteries prior to expiration of the specified interval. If the ambient air is less than 0.5% C O₂, replace the detector cell frequently.</p> <p>Typical Operating Time: 8 – 12 hours.</p>
Additional equipment (if needed, based on site conditions)	
Combustible Gas Indicator (CGI)	<p>Hazard Monitored: Combustible gases and vapors.</p> <p>Application: Measures the concentration of combustible gas or vapor.</p> <p>Detection Method: A filament, usually made of platinum, is heated by burning the combustible gas or vapor. The increase in heat is measured. Gases and vapors are ionized in a flame. A current is produced in proportion to the number of carbon atoms present.</p> <p>General Care/Maintenance: Recharge or replace battery. Calibrate immediately before use.</p> <p>Typical Operating Time: Can be used for as long as the battery lasts, or for the recommended interval between calibrations, whichever is less.</p>
Flame Ionization Detector (FID) with Gas Chromatography Option <i>(i.e., Foxboro Organic Vapor Analyzer (OVA))</i>	<p>Hazard Monitored: Many organic gases and vapors (approved areas only).</p> <p>Application: In survey mode, detects the concentration of many organic gases and vapors. In gas chromatography (GC) mode, identifies and measures specific compounds. In survey mode, all the organic compounds are ionized and detected at the same time. In GC mode, volatile species are separated.</p> <p>General Care/Maintenance: Recharge or replace battery. Monitor fuel and/or combustion air supply gauges. Perform routine maintenance as described in the manual. Check for leaks.</p> <p>Typical Operating Time: 8 hours; 3 hours with strip chart recorder.</p>
Potable Infrared (IR) Spectrophotometer	<p>Hazard Monitored: Many gases and vapors.</p> <p>Application: Measures concentration of many gases and vapors in air. Designed to quantify one or two component mixtures.</p> <p>Detection Method: Passes different frequencies of IR through the sample. The frequencies absorbed are specific for each compound.</p> <p>General Care/Maintenance: As specified by the manufacturer.</p>

Instrument	Operation Parameters
Direct Reading Colorimetric Indicator Tube	<p>Hazard Monitored: Specific gas and vapors.</p> <p>Application: Measures concentration of specific gases and vapors.</p> <p>Detection Method: The compound reacts with the indicator chemical in the tube, producing a stain whose length or color change is proportional to the compound's concentration.</p> <p>General Care/Maintenance: Do not use a previously opened tube even if the indicator chemical is not stained. Check pump for leaks before and after use. Refrigerate before use to maintain a shelf life of about 2 years. Check expiration dates of tubes. Calibrate pump volume at least quarterly. Avoid rough handling which may cause channeling.</p>
Aerosol Monitor	<p>Hazard Monitored: Airborne particulate (dust, mist, fume) concentrations</p> <p>Application: Measures total concentration of semi-volatile organic compounds, PCBs, and metals.</p> <p>Detection Method: Based on light-scattering properties of particulate matter. Using an internal pump, air sample is drawn into the sensing volume where near infrared light scattering is used to detect particles.</p> <p>General Care/Maintenance: As specified by the mfr. Also, the instrument must be calibrated with particulates of a size and refractive index similar to those to be measured in the ambient air.</p>
Monitox	<p>Hazard Monitored: Gases and vapors.</p> <p>Application: Measures specific gases and vapors.</p> <p>Detection Method: Electrochemical sensor relatively specific for the chemical species in question.</p> <p>General Care/Maintenance: Moisten sponge before use; check the function switch; change the battery when needed.</p>
Gamma Radiation Survey Instrument	<p>Hazard Monitored: Gamma Radiation.</p> <p>Application: Environmental radiation monitor.</p> <p>Detection Method: Scintillation detector.</p> <p>General Care/Maintenance: Must be calibrated annually at a specialized facility.</p> <p>Typical Operating Time: Can be used for as long as the battery lasts, or for the recommended interval between calibrations, whichever is less.</p>

**TABLE 4
INSTRUMENTATION ACTION LEVELS**

<u>Photoionization Detector Action Levels</u>	<u>Action Required</u>
Background to 5 ppm	No respirator; no further action required
> 1 ppm but < 5 ppm for > 5 minutes	<ol style="list-style-type: none"> 1. Temporarily discontinue all activities and evaluate potential causes of the excessive readings. If these levels persist and cannot be mitigated (i.e., by slowing drilling or excavation activities), contact HSO to review conditions and determine source and appropriate response action. 2. If PID readings remain above 1 ppm, temporarily discontinue work and upgrade to Level C protection. 3. If sustained PID readings fall below 1 ppm, downgrading to Level D protection may be permitted.
> 5 ppm but < 150 ppm for > 5 minutes	<ol style="list-style-type: none"> 1. Discontinue all work; all workers shall move to an area upwind of the jobsite. 2. Evaluate potential causes of the excessive readings and allow work area to vent until VOC concentrations fall below 5 ppm. 3. Level C protection will continue to be used until PID readings fall below 1 ppm.
> 150 ppm	Evacuate the work area

- Notes:**
1. 1 ppm level based on OSHA Permissible Exposure Limit (PEL) for benzene.
 2. 5 ppm level based on OSHA Short Term Exposure Limit (STEL) maximum exposure for benzene for any 15 minute period.
 3. 150 ppm level based on NIOSH Immediately Dangerous to Life and Health (IDLH) for tetrachloroethylene.

**TABLE 5
EMERGENCY NOTIFICATION LIST**

ORGANIZATION	CONTACT	TELEPHONE
Local Police Department	NYPD	911
Local Fire Department	NYFD	911
Ambulance/Rescue Squad	NYFD	911
Hospital	New York Downtown Hospital	911 or 212-312-5000
Langan Incident / Injury Hotline		800-952-6426 ex 4699
Langan Project Manager	Paul McMahon	914-433-1157 (cell)
Langan Health and Safety Manager (HSM)	Tony Moffa	215-756-2523 (cell)
Langan Health & Safety Officer (HSO)	William Bohrer	410-984-3068 (cell)
Langan Field Team Leader (FTL)	To Be Determined	
Client's Representative	Mark Moskowitz	718-522-1267
National Response Center (NRC)		800-424-8802
Chemical Transportation Emergency Center (Chemtrec)		800-424-9300
Center for Disease Control (CDC)		404-639-3534
EPA (RCRA Superfund Hotline)		800-424-9346
TSCA Hotline		202-554-1404
Poison Control Center		800-222-1222

Immediately following an incident or near miss, unless emergency medical treatment is required, either the employee or a coworker must contact the Langan Incident/Injury Hotline at 1-(800)-9-LANGAN (ext. #4699).

TABLE 6
SUGGESTED FREQUENCY OF PHYSIOLOGICAL MONITORING
FOR FIT AND ACCLIMATED WORKERS^A

Adjusted Temperature^b	Normal Work Ensemble^c	Impermeable Ensemble
90°F or above (32.2°C) or above	After each 45 min. of work	After each 15 min. of work
87.5°F (30.8°-32.2°C)	After each 60 min. of work	After each 30 min. of work
82.5°-87.5°F (28.1°-30.8°C)	After each 90 min. of work	After each 60 min. of work
77.5°-82.5°F (25.3°-28.1°C)	After each 120 min. of work	After each 90 min. of work
72.5°-77.5°F (22.5°-25.3°C)	After each 150 min. of work	After each 120 min. of work

a For work levels of 250 kilocalories/hour.

b Calculate the adjusted air temperature (ta adj) by using this equation: $ta\ adj\ ^\circ F = ta\ ^\circ F + (13 \times \% \text{ sunshine})$. Measure air temperature (ta) with a standard mercury-in-glass thermometer, with the bulb shielded from radiant heat. Estimate percent sunshine by judging what percent time the sun is not covered by clouds that are thick enough to produce a shadow. (100 percent sunshine = no cloud cover and a sharp, distinct shadow; 0 percent sunshine = no shadows.)

c A normal work ensemble consists of cotton coveralls or other cotton clothing with long sleeves and pants.

**TABLE 7
HEAT INDEX**

RELATIVE HUMIDITY	ENVIRONMENTAL TEMPERATURE (Fahrenheit)										
	70	75	80	85	90	95	100	105	110	115	120
	APPARENT TEMPERATURE*										
0%	64	69	73	78	83	87	91	95	99	103	107
10%	65	70	75	80	85	90	95	100	105	111	116
20%	66	72	77	82	87	93	99	105	112	120	130
30%	67	73	78	84	90	96	104	113	123	135	148
40%	68	74	79	86	93	101	110	123	137	151	
50%	69	75	81	88	96	107	120	135	150		
60%	70	76	82	90	100	114	132	149			
70%	70	77	85	93	106	124	144				
80%	71	78	86	97	113	136					
90%	71	79	88	102	122						
100%	72	80	91	108							

*Combined Index of Heat and Humidity...what it "feels like" to the body
Source: National Oceanic and Atmospheric Administration

How to use Heat Index:

1. Across top locate Environmental Temperature
2. Down left side locate Relative Humidity
3. Follow across and down to find Apparent Temperature
4. Determine Heat Stress Risk on chart at right


Note: Exposure to full sunshine can increase Heat Index values by up to 15 degrees F.

Apparent Temperature	Heat Stress Risk with Physical Activity and/or Prolonged Exposure
90-105	Heat Cramps or Heat Exhaustion Possible
105-130	Heat Cramps or Heat Exhaustion Likely, Heat Stroke Possible
>130	Heatstroke Highly Likely

FIGURES

FIGURE 1

Site Location Map

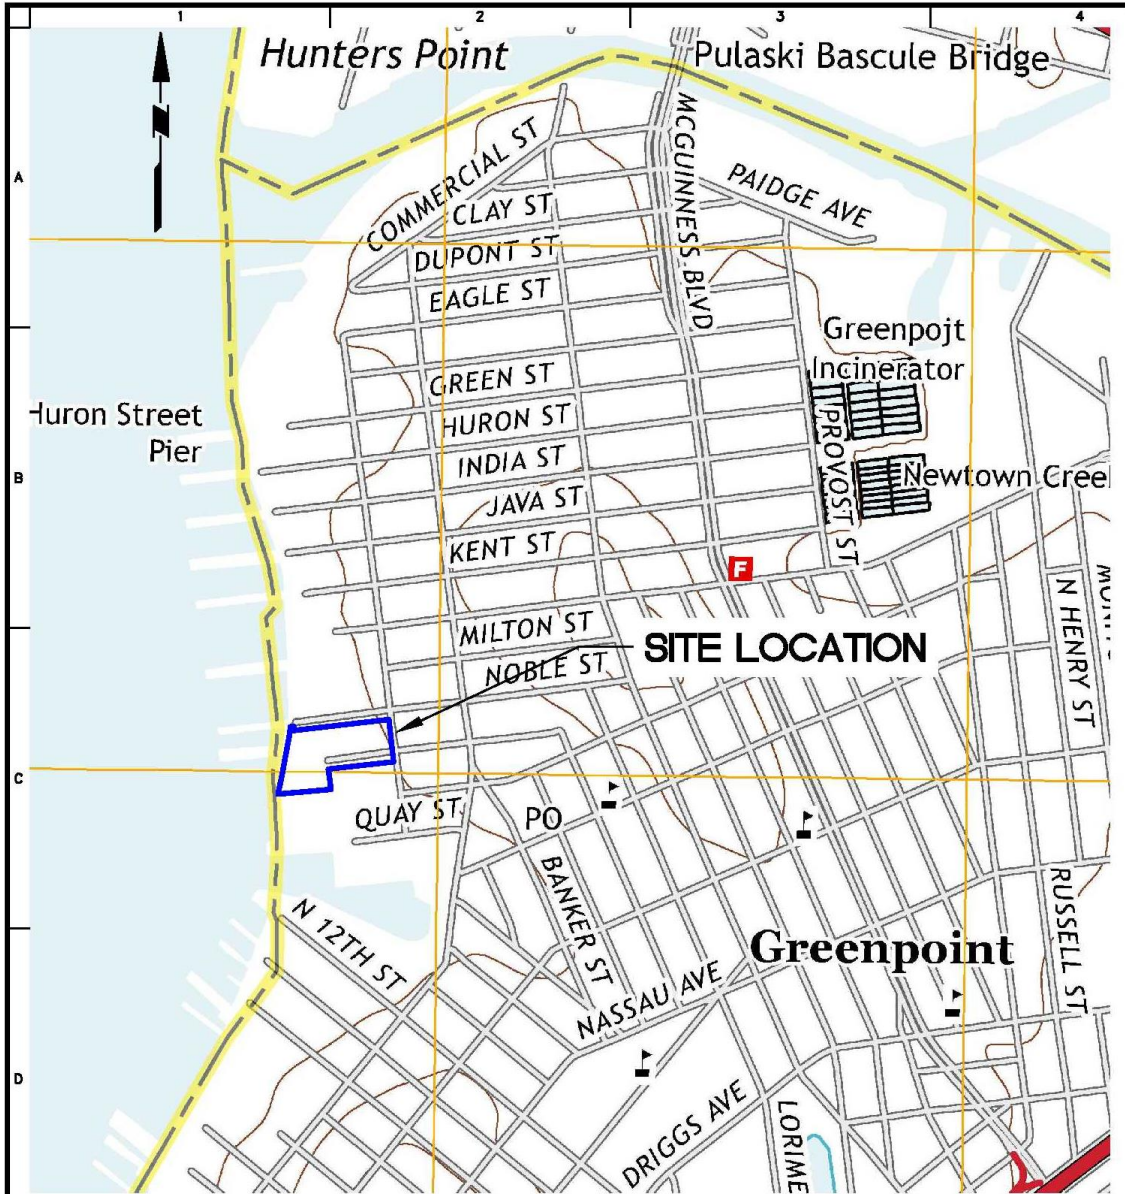

NOTES:
 BASE MAP TAKEN FROM USGS 7.5-MINUTE SERIES BROOKLYN QUADRANGLE, 2013.

<p>21 Penn Plaza, 360 West 31st Street, 8th Floor New York, NY 10001 T: 212.479.5400 F: 212.479.5444 www.langan.com</p> <p>Langan Engineering, Environmental, Surveying and Landscape Architecture, D.P.C. Langan Engineering and Environmental Services, Inc. Langan CT, Inc. Langan International LLC Collectively known as Langan</p>	Project	Figure Title	Project No.	Figure No.
	GREENPOINT MARINA	SITE LOCATION MAP	170267701	1
	BLOCK No. 2567, LOT No. 1 BLOCK No. 2570, LOT No. 36 GREENPOINT		Date	
	BROOKLYN NEW YORK		06/28/2016	
			Scale	NTS
		Drawn By	Checked By	
		MLR	JA	
		Submission Date		Sheet 1 of 5

FIGURE 2


HOSPITAL ROUTE PLAN

Hospital Location: New York Downtown Hospital
170 William Street
New York, NY
212-312-5000

START: 57 West Street, Brooklyn, NY

1. Head north on West Street toward Noble Street
2. Turn right onto Greenpoint Avenue
3. Turn right onto McGuinness Boulevard
4. Slight right to merge onto I-287 W toward Bklyn-Qns Expressway/Staten Island
5. Take exit 29 to merge onto Tillary Street toward Manhattan Br/Bklyn Civic Center
6. Turn right onto Brooklyn Bridge (signs for Brooklyn Br)
7. Take the Park Row S exit on the left
8. Continue onto Park Row
9. Turn left onto Spruce Street
10. Turn right onto Gold Street
11. Turn right onto Beekman Street, destination in on the right

END: New York Downtown Hospital, 170 William Street, New York, NY

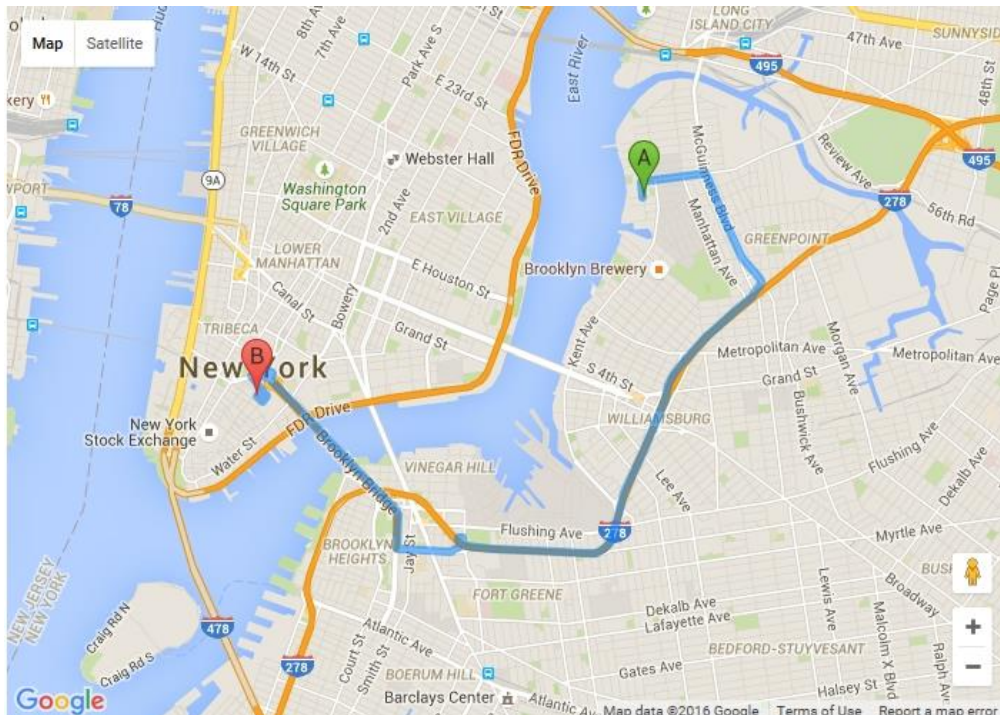

ATTACHMENT A

STANDING ORDERS

STANDING ORDERS

GENERAL

- No smoking, eating, or drinking in this work zone.
- Upon leaving the work zone, personnel will thoroughly wash their hands and face.
- Minimize contact with contaminated materials through proper planning of work areas and decontamination areas, and by following proper procedures. Do not place equipment on the ground. Do not sit on contaminated materials.
- No open flames in the work zone.
- Only properly trained and equipped personnel are permitted to work in potentially contaminated areas.
- Always use the appropriate level of personal protective equipment (PPE).
- Maintain close contact with your buddy in the work zone
- Contaminated material will be contained in the Exclusion Zone (EZ).
- Report any unusual conditions.
- Work areas will be kept clear and uncluttered. Debris and other slip, trip, and fall hazards will be removed as frequently as possible.
- The number of personnel and equipment in the work zone will be kept to an essential minimum.
- Be alert to the symptoms of fatigue and heat/cold stress, and their effects on the normal caution and judgment of personnel.
- Conflicting situations which may arise concerning safety requirements and working conditions must be addressed and resolved quickly by the site HSO.

TOOLS AND HEAVY EQUIPMENT

- Do not, under any circumstances, enter or ride in or on any backhoe bucket, materials hoist, or any other device not specifically designed to carrying passengers.
- Loose-fitting clothing or loose long hair is prohibited around moving machinery.
- Ensure that heavy equipment operators and all other personnel in the work zone are using the same hand signals to communicate.
- Drilling/excavating within 10 feet in any direction of overhead power lines is prohibited.
- The locations of all underground utilities must be identified and marked out prior to initiating any subsurface activities.
- Check to insure that the equipment operator has lowered all blades and buckets to the ground before shutting off the vehicle.
- If the equipment has an emergency stop device, have the operator show all personnel its location and how to activate it.
- Help the operator ensure adequate clearances when the equipment must negotiate in tight quarters; serve as a signalman to direct backing as necessary.
- Ensure that all heavy equipment that is used in the Exclusion Zone is kept in that zone until the job is done, and that such equipment is completely decontaminated before moving it into the clean area of the work zone.
- Samplers must not reach into or get near rotating equipment such as the drill rig. If personnel must work near any tools that could rotate, the equipment operator must completely shut down the rig prior to initiating such work. It may be necessary to use a remote sampling device.

ATTACHMENT B

DECONTAMINATION PROCEDURES

PERSONNEL DECONTAMINATION

LEVEL C DECONTAMINATION

Station 1:	Equipment Drop	1. Deposit equipment used on-site (tools, sampling devices and containers, monitoring instruments, radios, clipboards, etc.) on plastic drop cloths. Segregation at the drop reduces the probability of cross contamination. During hot weather operations, cool down stations may be set up within this area.
Station 2:	Outer Garment, Boots, and Gloves Wash and Rinse	2. Scrub outer boots, outer gloves and chemical-resistant splash suit with decon solution or detergent and water. Rinse off using copious amounts of water.
Station 3:	Outer Boot and Glove Removal	3. Remove outer boots and gloves. Deposit in container with plastic liner.
Station 4:	Canister or Mask Change	4. If worker leaves Exclusion Zone to change canister (or mask), this is the last step in the decontamination procedure. Worker's canister is exchanged, new outer gloves and boot covers donned, joints taped, and worker returns to duty.
Station 5:	Boot, Gloves and Outer Garment Removal	5. Boots, chemical-resistant splash suit, inner gloves removed and deposited in separate containers lined with plastic.
Station 6:	Face piece Removal	6. Face piece is removed (avoid touching face with fingers). Face piece deposited on plastic sheets.
Station 7:	Field Wash	7. Hands and face are thoroughly washed. Shower as soon as possible.

LEVEL D DECONTAMINATION

Station 1:	Equipment Drop	1. Deposit equipment used on-site (tools, sampling devices and containers, monitoring instruments, radios, clipboards, etc.) on plastic drop cloths. Segregation at the drop reduces the probability of cross contamination. During hot weather operations, cool down stations may be set up within this area.
Station 2:	Outer Garment, Boots, and Gloves Wash and Rinse	2. Scrub outer boots, outer gloves and chemical-resistant splash suit with decon solution or detergent and water. Rinse off using copious amounts of water.
Station 3:	Outer Boot and Glove Removal	3. Remove outer boots and gloves. Deposit in container with plastic liner.
Station 4:	Boot, Gloves and Outer Garment Removal	4. Boots, chemical-resistant splash suit, inner gloves removed and deposited in separate containers lined with plastic.
Station 5:	Field Wash	5. Hands and face are thoroughly washed. Shower as soon as possible.

EQUIPMENT DECONTAMINATION

GENERAL:

Equipment to be decontaminated during the project may include tools, monitoring equipment, respirators, sampling containers, laboratory equipment and drilling equipment.

All decontamination will be done by personnel in protective gear, appropriate for the level of decontamination, as determined by the site HSO. The decontamination work tasks will be split or rotated among support and work crews.

Depending on site conditions, backhoe and pumps may be decontaminated over a portable decontamination pad to contain wash water; or, wash water may be allowed to run off into a storm sewer system. Equipment needed may include a steam generator with high-pressure water, empty drums, screens, screen support structures, and shovels. Drums will be used to hold contaminated wash water pumped from the lined pit. These drums will be labeled as such.

Miscellaneous tools and equipment will be dropped into a plastic pail, tub, or other container. They will be brushed off and rinsed with a detergent solution, and finally rinsed with clean water.

MONITORING EQUIPMENT:

Monitoring equipment will be protected as much as possible from contamination by draping, masking, or otherwise covering as much of the instruments as possible with plastic without hindering the operation of the unit. The PID, HNu or OVA meter, for example, can be placed in a clear plastic bag, which allows reading of the scale and operation of knobs. The probes can be partially wrapped keeping the sensor tip and discharge port clear.

The contaminated equipment will be taken from the drop area and the protective coverings removed and disposed in the appropriate containers. Any dirt or obvious contamination will be brushed or wiped with a disposable paper wipe.

RESPIRATORS:

Respirators will be cleaned and disinfected after every use. Taken from the drop area, the masks (with the cartridges removed and disposed of with other used disposable gear) will be immersed in a cleaning solution and scrubbed gently with a soft brush, followed by a rinse in plain warm water, and then allowed to air dry. In the morning, new cartridges will be installed. Personnel will inspect their own masks for serviceability prior to donning them. And, once the mask is on, the wearer will check the respirator for leakage using the negative and positive pressure fit check techniques.

ATTACHMENT C

EMPLOYEE EXPOSURE/ INJURY INCIDENT REPORT

EMPLOYEE INCIDENT/INJURY REPORT LANGAN ENGINEERING & ENVIRONMENTAL SERVICES

(Complete and return to Tony Moffa in the Doylestown Office)

Affected Employee Name: _____ Date: _____

Incident type: Injury Report Only/No Injury
 Near Miss Other: _____

EMPLOYEE INFORMATION (Person completing Form)

Employee Name: _____ Employee No: _____

Title: _____ Office Location: _____

Length of time employed or date of hire: _____

Mailing address: _____

Sex: M F Birth date: _____

Business phone & extension: _____ Residence/cell phone: _____

ACCIDENT INFORMATION

Project: _____ Project #: _____

Date & time of incident: _____ Time work started & ended: _____

Site location: _____

Incident Type: Possible Exposure Exposure Physical Injury

Names of person(s) who witnessed the incident: _____

Exact location incident occurred: _____

Describe work being done: _____

Describe what affected employee was doing prior to the incident occurring: _____

Describe in detail how the incident occurred: _____

Nature of the incident (List the parts of the body affected): _____

Person(s) to whom incident was reported (Time and Date): _____

List the names of other persons affected during this incident: _____

Possible causes of the incident (equipment, unsafe work practices, lack of PPE, etc.): _____

Weather conditions during incident: _____

MEDICAL CARE INFORMATION

Did affected employee receive medical care? Yes No

If Yes, when and where was medical care received: _____

Provide name of facility (hospital, clinic, etc.): _____

Length of stay at the facility? _____

Did the employee miss any work time? Yes No Undetermined

Date employee last worked: _____ Date employee returned to work: _____

Has the employee returned to work? Yes No

Does the employee have any work limitations or restrictions from the injury? : Yes No

If Yes, please describe: _____

Did the exposure/injury result in permanent disability? Yes No Unknown

If Yes, please describe: _____

HEALTH & SAFETY INFORMATION

Was the operation being conducted under an established site specific CONSTRUCTION HEALTH AND SAFETY PLAN?

Yes No Not Applicable:

Describe protective equipment and clothing used by the employee:

Did any limitations in safety equipment or protective clothing contribute to or affect exposure / injury? If so, explain:

Employee Signature

Date

Langan Representative

Date

ATTACHMENT D

CALIBRATION LOG

ATTACHMENT E

MATERIAL SAFETY DATA SHEETS

SAFETY DATA SHEETS

All Langan Field Personnel Completing This Work Plan Are To Have Real Time Accessibility To Material Safety Data Sheet (MSDs) or Safety Data Sheet (SDSs) Through Their Smart Phone. If They Are Unable To Use the Smart Phone App, They Are To Bring Printed Copies of the MSDs/SDSs to The Site



MATERIAL SAFETY DATA SHEET

Section 1 - Chemical Product and Company Identification

MSDS Name: 1,2,4-Trimethylbenzene
Catalog Numbers: AC140090000, AC140090010, AC140090025, AC140095000
Synonyms: Pseudocumene.
Company Identification: Acros Organics BVBA
 Janssen Pharmaceuticaaan 3a
 2440 Geel, Belgium
Company Identification: (USA) Acros Organics
 One Reagent Lane
 Fair Lawn, NJ 07410
For information in the US, call: 800-ACROS-01
For information in Europe, call: +32 14 57 52 11
Emergency Number, Europe: +32 14 57 52 99
Emergency Number US: 201-796-7100
CHEMTREC Phone Number, US: 800-424-9300
CHEMTREC Phone Number, Europe: 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#: 95-63-6
Chemical Name: 1,2,4-Trimethylbenzene
%: 98
EINECS#: 202-436-9

Hazard Symbols:



XN N



Risk Phrases:

10 20 36/37/38 51/53

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Warning! Flammable liquid and vapor. Harmful if inhaled. Causes eye, skin, and respiratory tract irritation. Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Target Organs: Blood, central nervous system, respiratory system, eyes, skin.

Potential Health Effects

Eye: Causes eye irritation. Causes redness and pain.
Skin: Causes skin irritation. Causes redness and pain. May be harmful if absorbed through the skin.
Ingestion: May cause irritation of the digestive tract. Aspiration of material into the lungs may cause chemical pneumonitis, which may be fatal. May be harmful if swallowed. May cause central nervous system depression.
Inhalation: Harmful if inhaled. Causes respiratory tract irritation. May cause drowsiness, unconsciousness, and central nervous system depression.
Chronic: Prolonged or repeated skin contact may cause dermatitis. May cause anemia and other blood cell abnormalities. Prolonged exposure may produce a narcotic effect. Prolonged or repeated exposure may cause nausea, dizziness, and headache.

Section 4 - First Aid Measures

- Eyes:** Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.
- Skin:** Get medical aid. Immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
- Ingestion:** Do not induce vomiting. Possible aspiration hazard. Get medical aid immediately. Call a poison control center.
- Inhalation:** Get medical aid immediately. Remove from exposure and move to fresh air immediately. If breathing is difficult, give oxygen. Possible aspiration hazard. Do not use mouth-to-mouth resuscitation if victim ingested or inhaled the substance; induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.

Notes to Physician:

Section 5 - Fire Fighting Measures

- General Information:** As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Vapors may form an explosive mixture with air. Vapors can travel to a source of ignition and flash back. Will burn if involved in a fire. Containers may explode in the heat of a fire. Flammable liquid and vapor.
- Extinguishing Media:** Use water spray to cool fire-exposed containers. Use water spray, dry chemical, carbon dioxide, or chemical foam.
- Autoignition Temperature:** 500 deg C (932.00 deg F)
- Flash Point:** 48 deg C (118.40 deg F)
- Explosion Limits: Lower:** 0.9 vol %
- Explosion Limits: Upper:** 6.4 vol %
- NFPA Rating:** health: 2; flammability: 2; instability: 0;

Section 6 - Accidental Release Measures

- General Information:** Use proper personal protective equipment as indicated in Section 8.
- Spills/Leaks:** Absorb spill with inert material (e.g. vermiculite, sand or earth), then place in suitable container. Wear a self contained breathing apparatus and appropriate personal protection. (See Exposure Controls, Personal Protection section). Remove all sources of ignition. Use a spark-proof tool. Do not let this chemical enter the environment.

Section 7 - Handling and Storage

- Handling:** Use spark-proof tools and explosion proof equipment. Do not get in eyes, on skin, or on clothing. Do not ingest or inhale. Use only in a chemical fume hood. Keep away from heat, sparks and flame.
- Storage:** Keep away from sources of ignition. Store in a cool, dry place. Store in a tightly closed container. Flammables-area.

Section 8 - Exposure Controls, Personal Protection

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
1,2,4-Trimethylbenzene	25 ppm TWA (listed under Trimethyl benzene).	25 ppm TWA; 125 mg/m ³ TWA	none listed

OSHA Vacated PELs: 1,2,4-Trimethylbenzene: 25 ppm TWA; 125 mg/m³ TWA (listed under Trimethyl benzene)

Engineering Controls:

Use explosion-proof ventilation equipment. Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use only under a chemical fume hood.

Exposure Limits

Personal Protective Equipment

- Eyes:** Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
- Skin:** Wear appropriate protective gloves to prevent skin exposure.
- Clothing:** Wear appropriate protective clothing to prevent skin exposure.
- Respirators:** A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

Section 9 - Physical and Chemical Properties

Physical State: Clear liquid
Color: colorless
Odor: aromatic odor
pH: Not available
Vapor Pressure: 7 mm Hg @ 44.4 deg C
Vapor Density: 4.15 (air=1)
Evaporation Rate: Not available
Viscosity: Not available
Boiling Point: 168 deg C @ 760 mmHg (334.40°F)
Freezing/Melting Point: -44 deg C (-47.20°F)
Decomposition Temperature: Not available
Solubility in water: Insoluble
Specific Gravity/Density: 0.880 g/cm3
Molecular Formula: C9H12
Molecular Weight: 120.19

Section 10 - Stability and Reactivity
--

Chemical Stability:	Stable under normal temperatures and pressures.
Conditions to Avoid:	Incompatible materials, ignition sources, excess heat.
Incompatibilities with Other Materials	Strong oxidizing agents.
Hazardous Decomposition Products	Carbon monoxide, carbon dioxide.
Hazardous Polymerization	Will not occur.

Section 11 - Toxicological Information

RTECS#: CAS# 95-63-6: DC3325000

LD50/LC50: RTECS:
CAS# 95-63-6: Inhalation, rat: LC50 = 18000 mg/m3/4H;
 Oral, mouse: LD50 = 6900 mg/kg;
 Oral, rat: LD50 = 5 gm/kg;

Carcinogenicity: 1,2,4-Trimethylbenzene - Not listed as a carcinogen by ACGIH, IARC, NTP, or CA Prop 65.

Other: See actual entry in RTECS for complete information.

Section 12 - Ecological Information
--

Ecotoxicity: Fish: Fathead Minnow: LC50 = 77.2 mg/L; 96 Hr; Flow-through at 25 C (pH 7.24)

Other: Do not empty into drains.

Section 13 - Disposal Considerations

Dispose of in a manner consistent with federal, state, and local regulations.

Section 14 - Transport Information

US DOT
 Shipping Name: FLAMMABLE LIQUIDS, N.O.S. (1,2,4-Trimethylbenzene)
 Hazard Class: 3
 UN Number: UN1993
 Packing Group: III
 Canada TDG

Shipping Name: Not available
Hazard Class:
UN Number:
Packing Group:

Section 15 - Regulatory Information

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols: XN N

Risk Phrases:

R 10 Flammable.

R 20 Harmful by inhalation.

R 36/37/38 Irritating to eyes, respiratory system and skin.

R 51/53 Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Safety Phrases:

S 26 In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

S 61 Avoid release to the environment. Refer to special instructions/safety data sheets.

WGK (Water Danger/Protection)

CAS# 95-63-6: 3

Canada

CAS# 95-63-6 is listed on Canada's DSL List

Canadian WHMIS Classifications: B3, D1B, D2B

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

CAS# 95-63-6 is listed on Canada's Ingredient Disclosure List

US Federal

TSCA

CAS# 95-63-6 is listed on the TSCA
Inventory.

Section 16 - Other Information

MSDS Creation Date: 5/19/1999

Revision #5 Date 8/30/2007

Revisions were made in Sections: 3, 4, 5, 6, 7, 8, 9, 10, 11, 1

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall the company be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential, or exemplary damages howsoever arising, even if the company has been advised of the possibility of such damages.

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : 1,3,5-Trimethylbenzene

Product Number : 442236
Brand : Supelco

Supplier : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052
Emergency Phone # (For both supplier and manufacturer) : (314) 776-6555

Preparation Information : Sigma-Aldrich Corporation
Product Safety - Americas Region
1-800-521-8956

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Combustible Liquid, Target Organ Effect, Irritant

Target Organs

Peripheral nervous system., Central nervous system, Blood

GHS Classification

Flammable liquids (Category 3)
Acute toxicity, Inhalation (Category 5)
Skin irritation (Category 2)
Eye irritation (Category 2B)
Specific target organ toxicity - single exposure (Category 3)
Acute aquatic toxicity (Category 2)
Chronic aquatic toxicity (Category 2)

GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H226 Flammable liquid and vapour.
H315 + H320 Causes skin and eye irritation.
H333 May be harmful if inhaled.
H335 May cause respiratory irritation.
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P273 Avoid release to the environment.
P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

HMIS Classification

Health hazard: 2
 Chronic Health Hazard: *
 Flammability: 2
 Physical hazards: 0

NFPA Rating

Health hazard: 2
 Fire: 2
 Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. Causes respiratory tract irritation.
Skin May be harmful if absorbed through skin. Causes skin irritation.
Eyes Causes eye irritation.
Ingestion May be harmful if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : Mesitylene
 1,3,5-Trimethylbenzene

Formula : C₉H₁₂
 Molecular Weight : 120.19 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
Mesitylene			
108-67-8	203-604-4	601-025-00-5	-

4. FIRST AID MEASURES**General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES**Suitable extinguishing media**

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

Hazardous combustion products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

7. HANDLING AND STORAGE

Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

Conditions for safe storage

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value	Control parameters	Basis
Mesitylene	108-67-8	TWA	25 ppm 125 mg/m ³	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	25 ppm 123 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
		TWA	25 ppm 125 mg/m ³	USA. NIOSH Recommended Exposure Limits

Personal protective equipment

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Eye protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin and body protection

impervious clothing, Flame retardant antistatic protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form liquid, clear

Colour colourless

Safety data

pH no data available

Melting point/freezing point Melting point/range: -45 °C (-49 °F) - lit.

Boiling point 163 - 166 °C (325 - 331 °F) - lit.

Flash point 53.0 °C (127.4 °F) - closed cup

Ignition temperature 550 °C (1,022 °F)

Autoignition temperature 550.0 °C (1,022.0 °F)

Lower explosion limit 0.88 %(V)

Vapour pressure 18.7 hPa (14.0 mmHg) at 55.0 °C (131.0 °F)
3.3 hPa (2.5 mmHg) at 25.0 °C (77.0 °F)

Density 0.864 g/cm³ at 25 °C (77 °F)

Water solubility no data available

Partition coefficient: n-octanol/water no data available

Relative vapour density no data available

Odour no data available

Odour Threshold no data available

Evaporation rate no data available

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

no data available

Conditions to avoid

Heat, flames and sparks.

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides
Other decomposition products - no data available

11. TOXICOLOGICAL INFORMATION

Acute toxicity

Oral LD50

Inhalation LC50

LC50 Inhalation - rat - 4 h - 24,000 mg/m³

Dermal LD50

no data available

Other information on acute toxicity

no data available

Skin corrosion/irritation

Skin - rabbit - Skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - rabbit - Mild eye irritation - 24 h

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Teratogenicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

May cause respiratory irritation.

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

no data available

Potential health effects

Inhalation	May be harmful if inhaled. Causes respiratory tract irritation.
Ingestion	May be harmful if swallowed.
Skin	May be harmful if absorbed through skin. Causes skin irritation.
Eyes	Causes eye irritation.

Signs and Symptoms of Exposure

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Synergistic effects

no data available

Additional Information

RTECS: OX6825000

12. ECOLOGICAL INFORMATION**Toxicity**

Toxicity to fish	LC50 - Carassius auratus (goldfish) - 12.52 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates.	Immobilization EC50 - Daphnia magna (Water flea) - 6 mg/l - 48 h

Persistence and degradability

no data available

Bioaccumulative potential

no data available

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

Toxic to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

13. DISPOSAL CONSIDERATIONS**Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 2325 Class: 3 Packing group: III

Proper shipping name: 1,3,5-Trimethylbenzene

Marine pollutant: No

Poison Inhalation Hazard: No

IMDG

UN number: 2325 Class: 3 Packing group: III EMS-No: F-E, S-D

Proper shipping name: 1,3,5-TRIMETHYLBENZENE

Marine pollutant: No

IATA

UN number: 2325 Class: 3 Packing group: III

Proper shipping name: 1,3,5-Trimethylbenzene

15. REGULATORY INFORMATION**OSHA Hazards**

Combustible Liquid, Target Organ Effect, Irritant

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Mesitylene	108-67-8	1994-04-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Mesitylene	108-67-8	1994-04-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Mesitylene	108-67-8	1994-04-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Further information**

Copyright 2011 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.

SAFETY DATA SHEET

Version 4.6
Revision Date 03/03/2015
Print Date 03/03/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : 1,3-Butadiene
Product Number : 295035
Brand : Aldrich
Index-No. : 601-013-00-X
CAS-No. : 106-99-0

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA
Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable gases (Category 1), H220
Gases under pressure (Liquefied gas), H280
Germ cell mutagenicity (Category 1B), H340
Carcinogenicity (Category 1A), H350

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H220 : Extremely flammable gas.
H280 : Contains gas under pressure; may explode if heated.
H340 : May cause genetic defects.
H350 : May cause cancer.

Precautionary statement(s)

P201 : Obtain special instructions before use.
P202 : Do not handle until all safety precautions have been read and understood.
P210 : Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
P281 : Use personal protective equipment as required.

P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P377	Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
P381	Eliminate all ignition sources if safe to do so.
P405	Store locked up.
P410 + P403	Protect from sunlight. Store in a well-ventilated place.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₄ H ₆
Molecular weight	: 54.09 g/mol
CAS-No.	: 106-99-0
EC-No.	: 203-450-8
Index-No.	: 601-013-00-X

Hazardous components

Component	Classification	Concentration
1,3-Butadiene		
	Flam. Gas 1; Press. Gas Liquefied gas; Muta. 1B; Carc. 1A; H220, H280, H340, H350	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Clean up promptly by sweeping or vacuum.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Contents under pressure. Air sensitive. Light sensitive. Shock or heat may detonate May explode when heated. Handle and store under inert gas.

Storage class (TRGS 510): Gases

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Potential Occupational Carcinogen See Appendix A		
1,3-Butadiene	106-99-0	TWA	2 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cancer Suspected human carcinogen		
		TWA	2.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cancer Suspected human carcinogen		
		TWA	1 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		TWA	1.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		

		STEL	5 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		STEL	5.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		See 1910.1051		
		PEL	1.000000 ppm	OSHA Specifically Regulated Chemicals/Carcinogens
		<p>1910.1051</p> <p>This section applies to all occupational exposures to 1,3-Butadiene (BD), Chemical Abstracts Service Registry No. 106-99-0, except as provided in paragraph (a)(2) of this section. Except for the recordkeeping provisions in paragraph (m)(1) of this section, this section does not apply to the processing, use, or handling of products containing BD or to other work operations and streams in which BD is present where objective data are reasonably relied upon that demonstrate the work operation or the product or the group of products or operations to which it belongs may not reasonably be foreseen to release BD in airborne concentrations at or above the action level or in excess of the STEL under the expected conditions of processing, use, or handling that will cause the greatest possible release or in any plausible accident. This section also does not apply to work operations, products or streams where the only exposure to BD is from liquid mixtures containing 0.1% or less of BD by volume or the vapors released from such liquids, unless objective data become available that show that airborne concentrations generated by such mixtures can exceed the action level or STEL under reasonably predictable conditions of processing, use or handling that will cause the greatest possible release. Except for labeling requirements and requirements for emergency response, this section does not apply to the storage, transportation, distribution or sale of BD or liquid mixtures in intact containers or in transportation pipelines sealed in such a manner as to fully contain BD vapors or liquid. Where products or processes containing BD are exempted under paragraph (a)(2) of this section, the employer shall maintain records of the objective data supporting that exemption and the basis for the employer's reliance on the data, as provided in paragraph (m)(1) of this section</p> <p>1,3-Butadiene means an organic compound with chemical formula $CH_2=CH-CH=CH_2$ that has a molecular weight of approximately 54.15 g/mole</p> <p>OSHA specifically regulated carcinogen</p>		
		STEL	5.000000 ppm	OSHA Specifically Regulated Chemicals/Carcinogens
		<p>1910.1051</p> <p>This section applies to all occupational exposures to 1,3-Butadiene (BD), Chemical Abstracts Service Registry No. 106-99-0, except as provided in paragraph (a)(2) of this section. Except for the recordkeeping provisions in paragraph (m)(1) of this section, this section does not apply to the processing, use, or handling of products containing BD or to other work operations and streams in which BD is present where objective data are reasonably relied upon that demonstrate the work operation or the product or the group of products or operations to which it belongs may not reasonably be foreseen to release BD in airborne concentrations at or above the</p>		

		<p>action level or in excess of the STEL under the expected conditions of processing, use, or handling that will cause the greatest possible release or in any plausible accident. This section also does not apply to work operations, products or streams where the only exposure to BD is from liquid mixtures containing 0.1% or less of BD by volume or the vapors released from such liquids, unless objective data become available that show that airborne concentrations generated by such mixtures can exceed the action level or STEL under reasonably predictable conditions of processing, use or handling that will cause the greatest possible release. Except for labeling requirements and requirements for emergency response, this section does not apply to the storage, transportation, distribution or sale of BD or liquid mixtures in intact containers or in transportation pipelines sealed in such a manner as to fully contain BD vapors or liquid. Where products or processes containing BD are exempted under paragraph (a)(2) of this section, the employer shall maintain records of the objective data supporting that exemption and the basis for the employer's reliance on the data, as provided in paragraph (m)(1) of this section</p> <p>1,3-Butadiene means an organic compound with chemical formula CH₂=CH-CH=CH₂ that has a molecular weight of approximately 54.15 g/mole</p> <p>OSHA specifically regulated carcinogen</p>
--	--	--

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
1,3-Butadiene	106-99-0	1,2-Dihydroxy-4-(N-acetylcysteinyl)-butane	2.5000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
		Mixture of N-1 and N-2(hydroxybutenyl)valine	2.5pmol/g	Hemoglobin (Hb) adducts in blood	ACGIH - Biological Exposure Indices (BEI)
		Not critical			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm
Break through time: 480 min
Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: Liquefied gas |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -109 °C (-164 °F) - lit. |
| f) Initial boiling point and boiling range | -4.5 °C (23.9 °F) - lit. |
| g) Flash point | -75.99 °C (-104.78 °F) - closed cup - Tested according to Annex V of Directive 67/548/EEC. |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 16.3 %(V)
Lower explosion limit: 1.4 %(V) |
| k) Vapour pressure | ca.2,400 hPa (1,800 mmHg) at 20 °C (68 °F)
3,200 hPa (2,400 mmHg) at 30 °C (86 °F)
5,700 hPa (4,275 mmHg) at 50 °C (122 °F) |
| l) Vapour density | No data available |
| m) Relative density | 0.62 g/cm ³ at 20 °C (68 °F) |
| n) Water solubility | 0.5 g/l at 20 °C (68 °F) - Tested according to Annex V of Directive 67/548/EEC. |
| o) Partition coefficient: n-octanol/water | log Pow: 1.85 at 23 °C (73 °F) |
| p) Auto-ignition temperature | No data available |

- q) Decomposition temperature No data available
- r) Viscosity No data available
- s) Explosive properties No data available
- t) Oxidizing properties No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Test for peroxide formation before using or discard after 3 months.
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Oxidizing agents, Oxygen, Copper, Copper alloys, Carbides, Halogens, Metal oxides, Metals

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 5,480 mg/kg

LC50 Inhalation - Rat - 4 h - 285 mg/l

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

In vivo tests showed mutagenic effects

Carcinogenicity

Carcinogenicity - Rat - Inhalation

Tumorigenic: Carcinogenic by RTECS criteria. Cardiac: Tumors. Lungs, Thorax, or Respiration: Tumors.

This is or contains a component that has been reported to be carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Human carcinogen.

IARC: 1 - Group 1: Carcinogenic to humans (1,3-Butadiene)

NTP: Known to be human carcinogen (1,3-Butadiene)

OSHA: OSHA specifically regulated carcinogen (1,3-Butadiene)

Reproductive toxicity

No data available

Reproductive toxicity - Mouse - Inhalation

Effects on Fertility: Post-implantation mortality (e.g., dead and/or resorbed implants per total number of implants).

Effects on Embryo or Fetus: Extra embryonic structures (e.g., placenta, umbilical cord). Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

No data available

Developmental Toxicity - Rat - Inhalation

Specific Developmental Abnormalities: Musculoskeletal system.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

Cholinesterase inhibitors can cause heavy salivation and secretion in the lungs, lachrymation, blurred vision, involuntary defecation, diarrhea, tremor, ataxia, sweating, hypothermia, lowered heart rate, and/or a fall in blood pressure as a result of their action at cholinergic nerve sites., narcosis, Headache, Nausea, Vomiting, Dizziness, Drowsiness, Confusion., Weakness, Muscle cramps/spasms., Change in pupil size., Tremors, Seizures., Incoordination., Convulsions, Coma

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - other fish - 71.5 mg/l - 24 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1010 Class: 2.1
Proper shipping name: Butadienes, stabilized
Reportable Quantity (RQ): 10 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1010 Class: 2.1
Proper shipping name: BUTADIENES, STABILIZED

EMS-No: F-D, S-U

IATA

UN number: 1010 Class: 2.1
Proper shipping name: Butadienes, stabilized
IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

SARA 311/312 Hazards

Fire Hazard, Sudden Release of Pressure Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	2007-09-28

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Carc.	Carcinogenicity
Flam. Gas	Flammable gases
H220	Extremely flammable gas.

H280	Contains gas under pressure; may explode if heated.
H340	May cause genetic defects.
H350	May cause cancer.
Muta.	Germ cell mutagenicity
Press. Gas	Gases under pressure

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	4
Physical Hazard	3

NFPA Rating

Health hazard:	0
Fire Hazard:	4
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 03/03/2015

Print Date: 03/03/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : 1,1-Dichloroethane

Product Number : 48512
Brand : Supelco
Index-No. : 602-011-00-1

CAS-No. : 75-34-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheetCompany : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USATelephone : +1 800-325-5832
Fax : +1 800-325-5052**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**Flammable liquids (Category 2), H225
Acute toxicity, Oral (Category 4), H302
Eye irritation (Category 2A), H319
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H225 : Highly flammable liquid and vapour.
H302 : Harmful if swallowed.
H319 : Causes serious eye irritation.
H335 : May cause respiratory irritation.
H412 : Harmful to aquatic life with long lasting effects.

Precautionary statement(s)

P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell. Rinse mouth.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: Ethylidene chloride
Formula	: C ₂ H ₄ Cl ₂
Molecular weight	: 98.96 g/mol
CAS-No.	: 75-34-3
EC-No.	: 200-863-5
Index-No.	: 602-011-00-1

Hazardous components

Component	Classification	Concentration
1,1-Dichloroethane	Flam. Liq. 2; Acute Tox. 4; Eye Irrit. 2A; STOT SE 3; Aquatic Acute 3; Aquatic Chronic 3; H225, H302, H319, H335, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
1,1-Dichloroethane	75-34-3	TWA	100.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Upper Respiratory Tract irritation Eye irritation Liver damage Kidney damage Not classifiable as a human carcinogen		
		TWA	100.000000 ppm 400.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		See Appendix C		
		TWA	100.000000 ppm 400.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 60 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering

controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-97.99 °C (-144.38 °F)
f) Initial boiling point and boiling range	55.0 - 58.0 °C (131.0 - 136.4 °F)
g) Flash point	-9.99 °C (14.02 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	1.17 g/cm ³
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 725.0 mg/kg

LC50 Inhalation - Rat - 4 h - 13000 ppm

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

Chronic exposure may cause dermatitis.

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: KI0175000

Liver injury may occur., Kidney injury may occur., narcosis, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Central nervous system -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2362 Class: 3 Packing group: II
Proper shipping name: 1,1-Dichloroethane
Reportable Quantity (RQ): 1000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 2362 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: 1,1-DICHLOROETHANE

IATA

UN number: 2362 Class: 3 Packing group: II
Proper shipping name: 1,1-Dichloroethane

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,1-Dichloroethane	75-34-3	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,1-Dichloroethane	75-34-3	2007-07-01

Pennsylvania Right To Know Components

1,1-Dichloroethane	CAS-No. 75-34-3	Revision Date 2007-07-01
--------------------	--------------------	-----------------------------

New Jersey Right To Know Components

1,1-Dichloroethane	CAS-No. 75-34-3	Revision Date 2007-07-01
--------------------	--------------------	-----------------------------

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.	CAS-No. 75-34-3	Revision Date 2007-09-28
1,1-Dichloroethane		

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H302	Harmful if swallowed.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.3

Revision Date: 12/29/2015

Print Date: 04/11/2016

SAFETY DATA SHEET

Version 4.7
 Revision Date 06/18/2015
 Print Date 02/09/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : 1,3-Dichlorobenzene

Product Number : 113808
 Brand : Aldrich
 Index-No. : 602-067-00-7

CAS-No. : 541-73-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
 3050 Spruce Street
 SAINT LOUIS MO 63103
 USA

Telephone : +1 800-325-5832
 Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 4), H227
 Acute toxicity, Oral (Category 4), H302
 Acute aquatic toxicity (Category 2), H401
 Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H227 Combustible liquid.
 H302 Harmful if swallowed.
 H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
 P264 Wash skin thoroughly after handling.
 P270 Do not eat, drink or smoke when using this product.
 P273 Avoid release to the environment.
 P280 Wear protective gloves/ eye protection/ face protection.
 P301 + P312 + P330 IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you

P370 + P378	feel unwell. Rinse mouth. In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	C ₆ H ₄ Cl ₂
Molecular weight	:	147.00 g/mol
CAS-No.	:	541-73-1
EC-No.	:	208-792-1
Index-No.	:	602-067-00-7

Hazardous components

Component	Classification	Concentration
1,3-Dichlorobenzene		
	Flam. Liq. 4; Acute Tox. 4; Aquatic Acute 2; Aquatic Chronic 2; H227, H302, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Combustible liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 37 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -25 - -22 °C (-13 - -8 °F) - lit. |
| f) Initial boiling point and boiling range | 172 - 173 °C (342 - 343 °F) - lit. |
| g) Flash point | 67.0 °C (152.6 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 1.288 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | log Pow: 5 |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |

t) Oxidizing properties No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intraperitoneal - Mouse - 1,062 mg/kg

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (1,3-Dichlorobenzene)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: CZ4499000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 7.8 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates LC50 - Daphnia magna (Water flea) - 1.7 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Pimephales promelas (fathead minnow) - 32 d
- 0.3 mg/l

Bioconcentration factor (BCF): 97

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

This combustible material may be burned in a chemical incinerator equipped with an afterburner and scrubber. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 3082 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (1,3-Dichlorobenzene)
Reportable Quantity (RQ): 100 lbs
Marine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 3082 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S. (1,3-Dichlorobenzene)
Marine pollutant:yes

IATA

UN number: 3082 Class: 9 Packing group: III

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,3-Dichlorobenzene	541-73-1	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,3-Dichlorobenzene	541-73-1	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,3-Dichlorobenzene	541-73-1	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,3-Dichlorobenzene	541-73-1	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Flam. Liq.	Flammable liquids
H227	Combustible liquid.
H302	Harmful if swallowed.
H401	Toxic to aquatic life.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

NFPA Rating

Health hazard:	1
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information
Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.7

Revision Date: 06/18/2015

Print Date: 02/09/2016

SAFETY DATA SHEET

Version 4.4
Revision Date 04/24/2015
Print Date 04/01/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : 1,4-Dichlorobenzene

Product Number : D56829
Brand : Aldrich
Index-No. : 602-035-00-2

CAS-No. : 106-46-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Eye irritation (Category 2A), H319
Carcinogenicity (Category 2), H351
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H319 Causes serious eye irritation.
H351 Suspected of causing cancer.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.
P264 Wash skin thoroughly after handling.
P273 Avoid release to the environment.
P280 Wear protective gloves/ eye protection/ face protection.

P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	C ₆ H ₄ Cl ₂
Molecular weight	:	147.00 g/mol
CAS-No.	:	106-46-7
EC-No.	:	203-400-5
Index-No.	:	602-035-00-2

Hazardous components

Component	Classification	Concentration
1,4-Dichlorobenzene		
	Eye Irrit. 2A; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H319, H351, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,4-Dichlorobenzene	106-46-7	TWA	10.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Eye irritation Kidney damage Confirmed animal carcinogen with unknown relevance to humans		
		Potential Occupational Carcinogen See Appendix A		
		TWA	75.000000 ppm 450.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: sheets
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 52 - 54 °C (126 - 129 °F) - lit. |
| f) Initial boiling point and boiling range | 173 °C (343 °F) - lit. |
| g) Flash point | 66.0 °C (150.8 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 8.8 hPa (6.6 mmHg) at 50.0 °C (122.0 °F)
0.5 hPa (0.4 mmHg) at 25.0 °C (77.0 °F) |
| l) Vapour density | No data available |
| m) Relative density | 1.241 g/mL at 25 °C (77 °F) |
| n) Water solubility | No data available |

- | | |
|---|-------------------|
| o) Partition coefficient: n-octanol/water | log Pow: 3.40 |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

Bulk density	650 kg/m ³
--------------	-----------------------

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD₀ Oral - Rat - male and female - > 2,000 mg/kg
(OECD Test Guideline 401)

LC₅₀ Inhalation - Rat - male and female - 4 h - > 5.07 mg/l

LD₀ Dermal - Rat - > 2,000 mg/kg
(OECD Test Guideline 402)

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation
(OECD Test Guideline 404)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation
(OECD Test Guideline 405)

Respiratory or skin sensitisation

Maximisation Test (GPMT) - Guinea pig
Did not cause sensitisation on laboratory animals.
(OECD Test Guideline 406)

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (1,4-Dichlorobenzene)

NTP: Reasonably anticipated to be a human carcinogen (1,4-Dichlorobenzene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: CZ4550000

Produces:, methemoglobin, Nausea, Vomiting, Increased pulse rate, Headache, Impairment of vision

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish flow-through test LC50 - *Salmo gairdneri* - 1.12 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates static test EC50 - *Daphnia magna* (Water flea) - 0.7 mg/l - 48 h

Toxicity to algae Growth inhibition EC50 - *Scenedesmus capricornutum* (fresh water algae) - 1.6 mg/l - 96 h

12.2 Persistence and degradability

Biodegradability aerobic - Exposure time 28 d
Result: 30 % - Not rapidly biodegradable
(OECD Test Guideline 301C)

12.3 Bioaccumulative potential

Bioaccumulation *Jordanella floridae* - 5 d
- 2.68 µg/l

Bioconcentration factor (BCF): 296

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (1,4-Dichlorobenzene)
Reportable Quantity (RQ): 100 lbs
Marine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (1,4-Dichlorobenzene)
Marine pollutant:yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (1,4-Dichlorobenzene)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,4-Dichlorobenzene	106-46-7	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,4-Dichlorobenzene	106-46-7	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,4-Dichlorobenzene	106-46-7	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,4-Dichlorobenzene	106-46-7	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
1,4-Dichlorobenzene	106-46-7	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H319	Causes serious eye irritation.
H351	Suspected of causing cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.4

Revision Date: 04/24/2015

Print Date: 04/01/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : 1,4-Dichlorobenzene

Product Number : D56829
Brand : Aldrich
Index-No. : 602-035-00-2

CAS-No. : 106-46-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Eye irritation (Category 2A), H319
Carcinogenicity (Category 2), H351
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H319 Causes serious eye irritation.
H351 Suspected of causing cancer.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.
P264 Wash skin thoroughly after handling.
P273 Avoid release to the environment.
P280 Wear protective gloves/ eye protection/ face protection.

P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₆ H ₄ Cl ₂
Molecular weight	: 147.00 g/mol
CAS-No.	: 106-46-7
EC-No.	: 203-400-5
Index-No.	: 602-035-00-2

Hazardous components

Component	Classification	Concentration
1,4-Dichlorobenzene		
	Eye Irrit. 2A; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H319, H351, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,4-Dichlorobenzene	106-46-7	TWA	10.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Eye irritation Kidney damage Confirmed animal carcinogen with unknown relevance to humans		
		Potential Occupational Carcinogen See Appendix A		
		TWA	75.000000 ppm 450.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: sheets
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 52 - 54 °C (126 - 129 °F) - lit. |
| f) Initial boiling point and boiling range | 173 °C (343 °F) - lit. |
| g) Flash point | 66.0 °C (150.8 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 8.8 hPa (6.6 mmHg) at 50.0 °C (122.0 °F)
0.5 hPa (0.4 mmHg) at 25.0 °C (77.0 °F) |
| l) Vapour density | No data available |
| m) Relative density | 1.241 g/mL at 25 °C (77 °F) |
| n) Water solubility | No data available |

- | | |
|---|-------------------|
| o) Partition coefficient: n-octanol/water | log Pow: 3.40 |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

Bulk density	650 kg/m ³
--------------	-----------------------

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD₀ Oral - Rat - male and female - > 2,000 mg/kg
(OECD Test Guideline 401)

LC₅₀ Inhalation - Rat - male and female - 4 h - > 5.07 mg/l

LD₀ Dermal - Rat - > 2,000 mg/kg
(OECD Test Guideline 402)

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation
(OECD Test Guideline 404)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation
(OECD Test Guideline 405)

Respiratory or skin sensitisation

Maximisation Test (GPMT) - Guinea pig
Did not cause sensitisation on laboratory animals.
(OECD Test Guideline 406)

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (1,4-Dichlorobenzene)

NTP: Reasonably anticipated to be a human carcinogen (1,4-Dichlorobenzene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: CZ4550000

Produces:, methemoglobin, Nausea, Vomiting, Increased pulse rate, Headache, Impairment of vision

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish flow-through test LC50 - *Salmo gairdneri* - 1.12 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates static test EC50 - *Daphnia magna* (Water flea) - 0.7 mg/l - 48 h

Toxicity to algae Growth inhibition EC50 - *Scenedesmus capricornutum* (fresh water algae) - 1.6 mg/l - 96 h

12.2 Persistence and degradability

Biodegradability aerobic - Exposure time 28 d
Result: 30 % - Not rapidly biodegradable (OECD Test Guideline 301C)

12.3 Bioaccumulative potential

Bioaccumulation *Jordanella floridae* - 5 d
- 2.68 µg/l

Bioconcentration factor (BCF): 296

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (1,4-Dichlorobenzene)
Reportable Quantity (RQ): 100 lbs
Marine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (1,4-Dichlorobenzene)
Marine pollutant:yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (1,4-Dichlorobenzene)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,4-Dichlorobenzene	106-46-7	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,4-Dichlorobenzene	106-46-7	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,4-Dichlorobenzene	106-46-7	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,4-Dichlorobenzene	106-46-7	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
1,4-Dichlorobenzene	106-46-7	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H319	Causes serious eye irritation.
H351	Suspected of causing cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.4

Revision Date: 04/24/2015

Print Date: 01/29/2016

MATERIAL SAFETY DATA SHEET

Date Printed: 05/24/2004

Date Updated: 03/10/2004

Version 1.5

Section 1 - Product and Company Information

Product Name 2-BUTANONE, 99.5+%, HPLC GRADE
Product Number 270695
Brand ALDRICH

Company Sigma-Aldrich
Street Address 3050 Spruce Street
City, State, Zip, Country SAINT LOUIS MO 63103 US
Technical Phone: 314 771 5765
Emergency Phone: 414 273 3850 Ext. 5996
Fax: 800 325 5052

Section 2 - Composition/Information on Ingredient

Substance Name	CAS #	SARA 313
2-BUTANONE	78-93-3	Yes

Formula C4H8O
Synonyms Acetone, methyl- * Aethylmethylketon (German) *
Butanone * 2-Butanone (OSHA) * Butanone 2
(French) * 3-Butanone * Ethyl methyl cetone
(French) * Ethylmethylketon (Dutch) * Ketone,
ethyl methyl * Meetco * MEK (OSHA) * Methyl
acetone * Methyl ethyl ketone (ACGIH:OSHA) *
Metiletilchetone (Italian) * Metyloetyloketon
(Polish) * RCRA waste number U159

RTECS Number: EL6475000

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Flammable (USA) Highly Flammable (EU). Irritant.
Irritating to respiratory system and skin. Risk of serious damage
to eyes. Vapors may cause drowsiness and dizziness.
Target organ(s): Central nervous system.

HMIS RATING

HEALTH: 2*
FLAMMABILITY: 3
REACTIVITY: 1

NFPA RATING

HEALTH: 2
FLAMMABILITY: 3
REACTIVITY: 1

*additional chronic hazards present.

For additional information on toxicity, please refer to Section 11.

Section 4 - First Aid Measures

ORAL EXPOSURE

If swallowed, wash out mouth with water provided person is conscious. Call a physician.

INHALATION EXPOSURE

If inhaled, remove to fresh air. If not breathing give artificial respiration. If breathing is difficult, give oxygen.

DERMAL EXPOSURE

In case of contact, immediately wash skin with soap and copious amounts of water.

EYE EXPOSURE

In case of contact, immediately flush eyes with copious amounts of water for at least 15 minutes.

Section 5 - Fire Fighting Measures

FLAMMABLE HAZARDS

Flammable Hazards: Yes

EXPLOSION HAZARDS

Vapor may travel considerable distance to source of ignition and flash back. Container explosion may occur under fire conditions.

FLASH POINT

30 °F -1 °C Method: closed cup

EXPLOSION LIMITS

Lower: 1.8 % Upper: 10.1 %

AUTOIGNITION TEMP

516 °C

FLAMMABILITY

N/A

EXTINGUISHING MEDIA

Suitable: Water spray. Carbon dioxide, dry chemical powder, or appropriate foam.

FIREFIGHTING

Protective Equipment: Wear self-contained breathing apparatus and protective clothing to prevent contact with skin and eyes.
Specific Hazard(s): Flammable liquid. Emits toxic fumes under fire conditions.

Section 6 - Accidental Release Measures

PROCEDURE TO BE FOLLOWED IN CASE OF LEAK OR SPILL

Evacuate area. Shut off all sources of ignition. Use nonsparking tools.

PROCEDURE(S) OF PERSONAL PRECAUTION(S)

Wear self-contained breathing apparatus, rubber boots, and heavy rubber gloves.

METHODS FOR CLEANING UP

Cover with dry-lime, sand, or soda ash. Place in covered containers using non-sparking tools and transport outdoors. Ventilate area and wash spill site after material pickup is complete.

Section 7 - Handling and Storage

HANDLING

User Exposure: Do not breathe vapor. Do not get in eyes, on skin, on clothing. Avoid prolonged or repeated exposure.

STORAGE

Suitable: Keep tightly closed. Keep away from heat, sparks, and open flame. Store in a cool dry place. Store under nitrogen.

SPECIAL REQUIREMENTS

Hygroscopic.

Section 8 - Exposure Controls / PPE

ENGINEERING CONTROLS

Safety shower and eye bath. Use nonsparking tools. Mechanical exhaust required.

PERSONAL PROTECTIVE EQUIPMENT

Respiratory: Government approved respirator.
Hand: Compatible chemical-resistant gloves.
Eye: Chemical safety goggles.

GENERAL HYGIENE MEASURES

Remove and wash contaminated clothing promptly. Wash thoroughly after handling.

EXPOSURE LIMITS, RTECS

Country	Source	Type	Value
USA	ACGIH	STEL	300 PPM
USA	ACGIH	TWA	200 PPM
USA	MSHA Standard-air	TWA	200 PPM (590 MG/M3)
USA	OSHA.	PEL	8H TWA 200 PPM (590 MG/M3)
New Zealand OEL			
Remarks: check ACGIH TLV			
USA	NIOSH	TWA	200 PPM
		STEL	300 PPM

EXPOSURE LIMITS

Country	Source	Type	Value
Poland		NDS	200 MG/M3
Poland		NDSch	850 MG/M3
Poland		NDSP	-

Section 9 - Physical/Chemical Properties

Appearance	Physical State: Clear liquid Color: Colorless	
Property	Value	At Temperature or Pressure
Molecular Weight	72.11 AMU	
pH	N/A	
BP/BP Range	79 - 80 °C	
MP/MP Range	-87 °C	
Freezing Point	-85.9 °C	
Vapor Pressure	71 mmHg	20 °C
Vapor Density	2.49 g/l	
Saturated Vapor Conc.	N/A	
SG/Density	0.804 g/cm3	

Bulk Density	N/A	
Odor Threshold	5.4 - 1 ppm	
Volatile%	N/A	
VOC Content	N/A	
Water Content	N/A	
Solvent Content	N/A	
Evaporation Rate	N/A	
Viscosity	0.4 Pas	25 °C
Surface Tension	24.6 mN/m	20 °C
Partition Coefficient	Log Kow: 0.29	
Decomposition Temp.	N/A	
Flash Point	30 °F -1 °C	Method: closed cup
Explosion Limits	Lower: 1.8 % Upper: 10.1 %	
Flammability	N/A	
Autoignition Temp	516 °C	
Refractive Index	1.379	
Optical Rotation	N/A	
Miscellaneous Data	N/A	
Solubility	Solubility in Water:soluble Other Solvents: ALCOHOL, ETHER, ACETONE BENZENE	

N/A = not available

Section 10 - Stability and Reactivity

STABILITY

Stable: Stable.

Conditions to Avoid: Protect from moisture.

Materials to Avoid: Oxidizing agents, Strong reducing agents.

HAZARDOUS DECOMPOSITION PRODUCTS

Hazardous Decomposition Products: Carbon monoxide, Carbon dioxide.

HAZARDOUS POLYMERIZATION

Hazardous Polymerization: Will not occur

Section 11 - Toxicological Information

ROUTE OF EXPOSURE

Skin Contact: Causes skin irritation.

Skin Absorption: May be harmful if absorbed through the skin.

Eye Contact: Causes severe eye irritation.

Inhalation: Material is irritating to mucous membranes and upper respiratory tract. May be harmful if inhaled.

Ingestion: May be harmful if swallowed.

TARGET ORGAN(S) OR SYSTEM(S)

Central nervous system.

SIGNS AND SYMPTOMS OF EXPOSURE

Can cause CNS depression. Exposure can cause: Gastrointestinal disturbances. Narcotic effect.

TOXICITY DATA

Oral

Rat

2737 mg/kg

LD50

Inhalation
Rat
23,500 mg/m³
LC50

Intraperitoneal
Rat
607 MG/KG
LD50

Oral
Mouse
4050 mg/kg
LD50

Inhalation
Mouse
32,000 mg/m³
LC50

Intraperitoneal
Mouse
616 MG/KG
LD50

Skin
Rabbit
6480 mg/kg
LD50

Inhalation
Mammal
38,000 mg/m³
LC50

IRRITATION DATA

Eyes
Human
350 ppm

Skin
Rabbit
500 mg
24H
Remarks: Moderate irritation effect

Skin
Rabbit
402 mg
24H
Remarks: Mild irritation effect

Skin
Rabbit
13.78 mg
24H
Remarks: Open irritation test

Eyes
Rabbit
80 mg

CHRONIC EXPOSURE - TERATOGEN

Species: Rat
Dose: 3000 PPM/7H
Route of Application: Inhalation
Exposure Time: (6-15D PREG)
Result: Specific Developmental Abnormalities: Craniofacial (including nose and tongue). Specific Developmental Abnormalities: Urogenital system. Specific Developmental Abnormalities: Homeostasis

Species: Rat
Dose: 1000 PPM/7H
Route of Application: Inhalation
Exposure Time: (6-15D PREG)
Result: Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Specific Developmental Abnormalities: Musculoskeletal system.

Species: Mouse
Dose: 3000 PPM/7H
Route of Application: Inhalation
Exposure Time: (6-15D PREG)
Result: Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

Section 12 - Ecological Information

ACUTE ECOTOXICITY TESTS

Test Type: EC50 Daphnia
Species: Daphnia magna
Time: 24 h
Value: 7,060 mg/l

Test Type: LC50 Fish
Species: Leuciscus idus
Time: 48 h
Value: 4,600 - 4,880 mg/l

Test Type: LC50 Fish
Species: Pimephales promelas (Fathead minnow)
Time: 96 h
Value: 3,130 - 3,320 mg/l

Section 13 - Disposal Considerations

APPROPRIATE METHOD OF DISPOSAL OF SUBSTANCE OR PREPARATION

Contact a licensed professional waste disposal service to dispose of this material. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Observe all federal, state, and local environmental regulations.

Section 14 - Transport Information

DOT

Proper Shipping Name: Ethyl methyl ketone [or] Methyl ethyl ketone
UN#: 1193
Class: 3

Packing Group: Packing Group II
Hazard Label: Flammable liquid
PIH: Not PIH

IATA

Proper Shipping Name: Methyl ethyl ketone
IATA UN Number: 1193
Hazard Class: 3
Packing Group: II

Section 15 - Regulatory Information

EU DIRECTIVES CLASSIFICATION

Symbol of Danger: F Xi
Indication of Danger: Highly Flammable. Irritant.
R: 11 36 66 67
Risk Statements: Highly flammable. Irritating to eyes. Repeated exposure may cause skin dryness or cracking. Vapors may cause drowsiness and dizziness.
S: 9 16
Safety Statements: Keep container in a well-ventilated place. Keep away from sources of ignition - no smoking.

US CLASSIFICATION AND LABEL TEXT

Indication of Danger: Flammable (USA) Highly Flammable (EU). Irritant.
Risk Statements: Irritating to respiratory system and skin. Risk of serious damage to eyes. Vapors may cause drowsiness and dizziness.
Safety Statements: Keep away from sources of ignition - no smoking. Take precautionary measures against static discharges. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Wear eye/face protection.
US Statements: Target organ(s): Central nervous system.

UNITED STATES REGULATORY INFORMATION

SARA LISTED: Yes
DEMINIMIS: 1 %
NOTES: This product is subject to SARA section 313 reporting requirements.
TSCA INVENTORY ITEM: Yes

CANADA REGULATORY INFORMATION

WHMIS Classification: This product has been classified in accordance with the hazard criteria of the CPR, and the MSDS contains all the information required by the CPR.
DSL: Yes
NDSL: No

Section 16 - Other Information


DISCLAIMER

For R&D use only. Not for drug, household or other uses.

WARRANTY

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Inc., shall not be held liable for any damage resulting from handling or

from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale. Copyright 2004 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.



Health	2
Fire	3
Reactivity	0
Personal Protection	H

Material Safety Data Sheet 2-Hexanone MSDS

Section 1: Chemical Product and Company Identification

Product Name: 2-Hexanone

Catalog Codes: SLH2950

CAS#: 591-78-6

RTECS: MP1400000

TSCA: TSCA 8(b) inventory: 2-Hexanone

CI#: Not available.

Synonym: Methyl butyl ketone

Chemical Formula: C₆H₁₂O

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
{2-}Hexanone	591-78-6	100

Toxicological Data on Ingredients: 2-Hexanone: ORAL (LD50): Acute: 2590 mg/kg [Rat]. 2430 mg/kg [Mouse]. DERMAL (LD50): Acute: 4860 mg/kg [Rabbit]. VAPOR (LC50): Acute: 8000 ppm 4 hour(s) [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Very hazardous in case of eye contact (irritant), of inhalation (lung irritant). Hazardous in case of skin contact (irritant), of ingestion, . Slightly hazardous in case of skin contact (permeator). Inflammation of the eye is characterized by redness, watering, and itching.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. Repeated or prolonged exposure is not known to aggravate medical condition.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Do not use an eye ointment. Seek medical attention.

Skin Contact:

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cold water may be used. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

Inhalation: Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

Ingestion:

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 533°C (991.4°F)

Flash Points: CLOSED CUP: 23°C (73.4°F). OPEN CUP: 28°C (82.4°F) (TAG).

Flammable Limits: LOWER: 1.2% UPPER: 8%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances: Flammable in presence of open flames and sparks.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill:

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container.

Large Spill:

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapour/spray. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes

Storage:

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. A refrigerated room would be preferable for materials with a flash point lower than 37.8°C (100°F).

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 25 CEIL: 40 (ppm) TWA: 100 CEIL: 165 (mg/m³) Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Not available.

Taste: Not available.

Molecular Weight: 100.16 g/mole

Color: Colorless to light yellow.

pH (1% soln/water): Not available.

Boiling Point: 127.5°C (261.5°F)

Melting Point: -56.9°C (-70.4°F)

Critical Temperature: Not available.

Specific Gravity: 0.8113 (Water = 1)

Vapor Pressure: 12 mm of Hg (@ 20°C)

Vapor Density: 3.45 (Air = 1)

Volatility: Not available.

Odor Threshold: 0.18 ppm

Water/Oil Dist. Coeff.: The product is equally soluble in oil and water; log(oil/water) = 0

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water, acetone.

Solubility:

Easily soluble in acetone. Partially soluble in cold water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances: Not available.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: Not available.

Polymerization: No.

Section 11: Toxicological Information

Routes of Entry: Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 2430 mg/kg [Mouse]. Acute dermal toxicity (LD50): 4860 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 8000 ppm 4 hour(s) [Rat].

Chronic Effects on Humans: Not available.

Other Toxic Effects on Humans:

Very hazardous in case of inhalation (lung irritant). Hazardous in case of skin contact (irritant), of ingestion, . Slightly hazardous in case of skin contact (permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: Passes through the placental barrier in animal. Testicular damage in animal.

Special Remarks on other Toxic Effects on Humans: Not available.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are more toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification: Class 3: Flammable liquid.

Identification: : Ketone Liquid, n.o.s.(2-Hexanone) : UN1224 PG: III

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

Rhode Island RTK hazardous substances: 2-Hexanone Pennsylvania RTK: 2-Hexanone Florida: 2-Hexanone Massachusetts RTK: 2-Hexanone New Jersey: 2-Hexanone TSCA 8(b) inventory: 2-Hexanone

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada): CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F).

DSCL (EEC):

R10- Flammable. R37/38- Irritating to respiratory system and skin. R41- Risk of serious damage to eyes.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 3

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 3

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information


References: Not available.

Other Special Considerations: Not available.

Created: 10/09/2005 05:43 PM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.



Health	2
Fire	3
Reactivity	0
Personal Protection	H

Material Safety Data Sheet

Methyl isobutyl ketone MSDS

Section 1: Chemical Product and Company Identification

Product Name: Methyl isobutyl ketone

Catalog Codes: SLM3412

CAS#: 108-10-1

RTECS: SA9275000

TSCA: TSCA 8(b) inventory: Methyl isobutyl ketone

CI#: Not available.

Synonym: 4-Methyl-2-pentanone

Chemical Formula: C₆H₁₂O

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Methyl isobutyl ketone	108-10-1	100

Toxicological Data on Ingredients: Methyl isobutyl ketone: ORAL (LD50): Acute: 1600 mg/kg [Guinea pig]. 2671 mg/kg [Mouse]. 2080 mg/kg [Rat]. DERMAL (LD50): Acute: 20001 mg/kg [Rabbit]. VAPOR (LC50): Acute: 8000 ppm 4 hour(s) [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Very hazardous in case of eye contact (irritant), of ingestion, of inhalation. Hazardous in case of skin contact (irritant, permeator). Inflammation of the eye is characterized by redness, watering, and itching.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance is toxic to lungs, the nervous system, mucous membranes. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Do not use an eye ointment. Seek medical attention.

Skin Contact:

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cold water may be used. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

Inhalation: Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

Ingestion:

Do not induce vomiting. Examine the lips and mouth to ascertain whether the tissues are damaged, a possible indication that the toxic material was ingested; the absence of such signs, however, is not conclusive. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 460°C (860°F)

Flash Points: CLOSED CUP: 14°C (57.2°F). OPEN CUP: 23°C (73.4°F).

Flammable Limits: LOWER: 1.4% UPPER: 7.5%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances: Flammable in presence of open flames and sparks.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill:

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container.

Large Spill:

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapour/spray. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes.

Storage:

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. A refrigerated room would be preferable for materials with a flash point lower than 37.8°C (100°F).

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 50 STEL: 75 CEIL: 125 (ppm) from ACGIH (TLV) [1995] TWA: 205 STEL: 300 CEIL: 510 (mg/m³) from ACGIH [1995]
Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Not available.

Taste: Not available.

Molecular Weight: 100.16 g/mole

Color: Not available.

pH (1% soln/water): Not available.

Boiling Point: 115.9°C (240.6°F)

Melting Point: -84°C (-119.2°F)

Critical Temperature: Not available.

Specific Gravity: 0.802 (Water = 1)

Vapor Pressure: 15.7 mm of Hg (@ 20°C)

Vapor Density: 3.45 (Air = 1)

Volatility: Not available.

Odor Threshold: 0.1 ppm

Water/Oil Dist. Coeff.: The product is equally soluble in oil and water; log(oil/water) = 0.1

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water.

Solubility: Partially soluble in cold water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances: Not available.

Corrosivity: Not available.

Special Remarks on Reactivity: Forms explosive peroxides on prolonged storage.

Special Remarks on Corrosivity: Not available.

Polymerization: No.

Section 11: Toxicological Information

Routes of Entry: Dermal contact. Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 1600 mg/kg [Guinea pig]. Acute dermal toxicity (LD50): 20001 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 8000 ppm 4 hour(s) [Rat].

Chronic Effects on Humans: The substance is toxic to lungs, the nervous system, mucous membranes.

Other Toxic Effects on Humans:

Very hazardous in case of ingestion, of inhalation. Hazardous in case of skin contact (irritant, permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: Passes through the placental barrier in human.

Special Remarks on other Toxic Effects on Humans: Not available.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are less toxic than the product itself.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification: Class 3: Flammable liquid.

Identification: : Methyl isobutyl ketone : UN1245 PG: II

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

Pennsylvania RTK: Methyl isobutyl ketone Massachusetts RTK: Methyl isobutyl ketone TSCA 8(b) inventory: Methyl isobutyl ketone SARA 313 toxic chemical notification and release reporting: Methyl isobutyl ketone CERCLA: Hazardous substances.: Methyl isobutyl ketone

Other Regulations: OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

Other Classifications:

WHMIS (Canada): CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F).

DSCL (EEC):

R11- Highly flammable. R38- Irritating to skin. R41- Risk of serious damage to eyes.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 3

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 3

Reactivity: 1

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/10/2005 08:40 PM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Version 5.4
Revision Date 01/02/2015
Print Date 12/11/2015

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Acenaphthene

Product Number : 215376
Brand : Aldrich

CAS-No. : 83-32-9

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Carcinogenicity (Category 1B), H350
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H315 : Causes skin irritation.
H319 : Causes serious eye irritation.
H335 : May cause respiratory irritation.
H350 : May cause cancer.
H410 : Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 : Obtain special instructions before use.
P202 : Do not handle until all safety precautions have been read and understood.

P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P281	Use personal protective equipment as required.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: 1,8-Ethylenenaphthalene
Formula	: C ₁₂ H ₁₀
Molecular weight	: 154.21 g/mol
CAS-No.	: 83-32-9
EC-No.	: 201-469-6

Hazardous components

Component	Classification	Concentration
Acenaphthene	Skin Irrit. 2; Eye Irrit. 2A; Carc. 1B; STOT SE 3; Aquatic Acute 1; Aquatic Chronic 1; H315, H319, H335, H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: solid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 90 - 94 °C (194 - 201 °F) - lit. |
| f) Initial boiling point and boiling range | 279 °C (534 °F) - lit. |
| g) Flash point | 125.0 °C (257.0 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |

k) Vapour pressure	13.3 hPa (10.0 mmHg) at 131.0 °C (267.8 °F)
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 3.39 - 4.19
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intraperitoneal - Rat - 600 mg/kg

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Acenaphthene)
ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.
NTP: Reasonably anticipated to be a human carcinogen (Acenaphthene)
OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

Inhalation - May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: AB1000000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Oncorhynchus mykiss (rainbow trout) - 0.67 mg/l - 96.0 h LC50 - Pimephales promelas (fathead minnow) - 0.6 - 1.73 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 1.27 - 3.45 mg/l - 48 h
Toxicity to algae	EC50 - Pseudokirchneriella subcapitata (green algae) - 0.52 - 0.53 mg/l - 96 h

12.2 Persistence and degradability

12.3 Bioaccumulative potential

Bioaccumulation Lepomis macrochirus (Bluegill) - 28 d
- 0.00894 mg/l

Bioconcentration factor (BCF): 387

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 3077 Class: 9 Packing group: III
 Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Acenaphthene)
 Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
 Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Acenaphthene)
 Marine pollutant:yes

IATA

UN number: 3077 Class: 9 Packing group: III
 Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Acenaphthene)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Acenaphthene	83-32-9	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Acenaphthene	83-32-9	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Acenaphthene	83-32-9	1993-04-24

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Acenaphthene	83-32-9	2007-09-28

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.

H350 May cause cancer.
H400 Very toxic to aquatic life.
H410 Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard: 0
Chronic Health Hazard: *
Flammability: 1
Physical Hazard 0

NFPA Rating

Health hazard: 0
Fire Hazard: 1
Reactivity Hazard: 0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.4

Revision Date: 01/02/2015

Print Date: 12/11/2015



SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name p-Cymene

Cat No. : AC111760000; AC111760010; AC111760025; AC111760100;
AC111762500

Synonyms Dolcymene; p-Isopropyltoluene

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company	Entity / Business Name	Emergency Telephone Number
Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100	Acros Organics One Reagent Lane Fair Lawn, NJ 07410	For information US call: 001-800-ACROS-01 / Europe call: +32 14 57 52 11 Emergency Number US :001-201-796-7100 / Europe : +32 14 57 52 99 CHEMTREC Tel. No. US :001-800-424-9300 / Europe :001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids	Category 3
Skin Corrosion/irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Respiratory system.	
Aspiration Toxicity	Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Flammable liquid and vapor
May be fatal if swallowed and enters airways
Causes skin irritation
Causes serious eye irritation
May cause respiratory irritation



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling
 Wear protective gloves/protective clothing/eye protection/face protection
 Avoid breathing dust/fume/gas/mist/vapors/spray
 Use only outdoors or in a well-ventilated area
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking
 Keep container tightly closed
 Ground/bond container and receiving equipment
 Use explosion-proof electrical/ventilating/lighting/equipment
 Use only non-sparking tools
 Take precautionary measures against static discharge
 Keep cool

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
 Call a POISON CENTER or doctor/physician if you feel unwell

Skin

If skin irritation occurs: Get medical advice/attention
 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
 Wash contaminated clothing before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
 If eye irritation persists: Get medical advice/attention

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician
 Do NOT induce vomiting

Fire

In case of fire: Use CO₂, dry chemical, or foam for extinction

Storage

Store locked up
 Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

None identified

3. Composition / information on ingredients

Component	CAS-No	Weight %
p-Cymene	99-87-6	>95

4. First-aid measures

Eye Contact

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
 Obtain medical attention.

Skin Contact

Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes. Obtain medical attention.

Inhalation

Remove from exposure, lie down. Move to fresh air. If breathing is difficult, give oxygen. If

not breathing, give artificial respiration. Obtain medical attention.

Ingestion Do not induce vomiting. Clean mouth with water. Get medical attention.

Most important symptoms/effects Breathing difficulties. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Water spray. Carbon dioxide (CO₂). Dry chemical. Use water spray to cool unopened containers. chemical foam.

Unsuitable Extinguishing Media No information available

Flash Point 47 °C / 116.6 °F
Method - No information available

Autoignition Temperature 435 °C / 815 °F

Explosion Limits

Upper 5.60%

Lower .70%

Sensitivity to Mechanical Impact No information available

Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Containers may explode when heated.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO₂)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
3

Flammability
2

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment.

Environmental Precautions See Section 12 for additional ecological information.

Methods for Containment and Clean Up Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Handling Avoid contact with skin and eyes. Do not breathe dust. Do not breathe vapors or spray mist. Take precautionary measures against static discharges. Use explosion-proof equipment. Use only non-sparking tools.

Storage Keep in a dry, cool and well-ventilated place. Keep container tightly closed. Keep away from heat and sources of ignition. Flammables area.

8. Exposure controls / personal protection

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Liquid
Appearance	Clear
Odor	aromatic
Odor Threshold	No information available
pH	No information available
Melting Point/Range	-68 °C / -90.4 °F
Boiling Point/Range	176 - 178 °C / 348.8 - 352.4 °F @ 760 mmHg
Flash Point	47 °C / 116.6 °F
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	5.60%
Lower	.70%
Vapor Pressure	1.5 mmHg @ 20 °C
Vapor Density	4.62 (Air = 1.0)
Relative Density	0.854
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	435 °C / 815 °F
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C10 H14
Molecular Weight	134.22

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Keep away from open flames, hot surfaces and sources of ignition. Excess heat. Incompatible products.
Incompatible Materials	Strong oxidizing agents, Strong acids, Strong bases
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	No information available.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
p-Cymene	3669 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
p-Cymene	99-87-6	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects Not mutagenic in AMES Test

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
p-Cymene	Not listed	LC50: 48 mg/L/96h (sheepshead minnow)	Not listed	LC50: 6.5 mg/L/48h

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility

Component	log Pow
p-Cymene	4.1

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN2046
 Hazard Class 3
 Packing Group III

TDG

UN-No UN2046
 Hazard Class 3
 Packing Group III

IATA

UN-No 2046
 Proper Shipping Name CYMENES
 Hazard Class 3
 Packing Group III

IMDG/IMO

UN-No 2046
 Proper Shipping Name CYMENES
 Hazard Class 3
 Packing Group III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
p-Cymene	X	X	-	202-796-7	-		X	X	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	Yes
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act Not applicable

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA

Not applicable

California Proposition 65

This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
p-Cymene	X	-	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
 DOT Marine Pollutant N
 DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations**Mexico - Grade**

No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class

B2 Flammable liquid
 D2B Toxic materials

**16. Other information****Prepared By**

Regulatory Affairs
 Thermo Fisher Scientific
 Email: EMSDS.RA@thermofisher.com

Revision Date

10-Feb-2015

Print Date

10-Feb-2015

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Poly(acenaphthylene)
Cat No. : AC178020000; AC178020050; AC178020100
Synonyms None.
Recommended Use Laboratory chemicals.
Uses advised against No Information available
Details of the supplier of the safety data sheet

Company Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100	Entity / Business Name Acros Organics One Reagent Lane Fair Lawn, NJ 07410	Emergency Telephone Number For information US call: 001-800-ACROS-01 / Europe call: +32 14 57 52 11 Emergency Number US :001-201-796-7100 / Europe : +32 14 57 52 99 CHEMTREC Tel. No. US :001-800-424-9300 / Europe :001-703-527-3887
---	--	--

2. Hazard(s) identification

Classification
Classification under 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Based on available data, the classification criteria are not met

Label Elements

None required

Hazards not otherwise classified (HNOC)

None identified

Unknown Acute Toxicity

.? % of the mixture consists of ingredients of unknown toxicity.

3. Composition / information on ingredients

Component	CAS-No	Weight %
Poly(acenaphthylene)	25036-01-5	100

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

	clothes and shoes.
Inhalation	Remove from exposure, lie down. Move to fresh air.
Ingestion	Do not induce vomiting. Never give anything by mouth to an unconscious person. Drink plenty of water. If possible drink milk afterwards.
Most important symptoms/effects Notes to Physician	No information available. Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Water spray. Carbon dioxide (CO ₂). Dry chemical. alcohol-resistant foam.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	No information available
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Thermal decomposition can lead to release of irritating gases and vapors Carbon monoxide (CO) Carbon dioxide (CO₂)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

NFPA

Health	Flammability	Instability	Physical hazards
0	0	0	N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment.
Environmental Precautions	See Section 12 for additional ecological information.

Methods for Containment and Clean Up Sweep up or vacuum up spillage and collect in suitable container for disposal.

7. Handling and storage

Handling	Avoid contact with skin and eyes. Avoid contact with clothing. Remove and wash contaminated clothing before re-use. Avoid breathing vapors or mists. Do not ingest. Wash thoroughly after handling.
Storage	Keep in a dry, cool and well-ventilated place. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines	This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.
----------------------------	---

Engineering Measures Ensure adequate ventilation, especially in confined areas. Ventilation systems.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Wear a NIOSH/MSHA or European Standard EN 149 approved full-facepiece airline respirator in the positive pressure mode with emergency escape provisions.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder Solid
Appearance	Yellow
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	No data available
Boiling Point/Range	No information available
Flash Point	No information available
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	No information available
Vapor Density	No information available
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products.
Incompatible Materials	Oxidizing agents
Hazardous Decomposition Products	Thermal decomposition can lead to release of irritating gases and vapors, Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	No information available.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information No acute toxicity information is available for this product

Oral LD50 Based on ATE data, the classification criteria are not met. ATE > 2000 mg/kg.
Dermal LD50 Based on ATE data, the classification criteria are not met. ATE > 2000 mg/kg.
Mist LC50 Based on ATE data, the classification criteria are not met. ATE > 5 mg/l.

Component Information

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Poly(acenaphthylene)	25036-01-5	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility No information available.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT Not regulated

TDG Not regulated

IATA Not regulated

IMDG/IMO Not regulated

15. Regulatory information

International Inventories

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazardous Categorization

Acute Health Hazard	No
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act Not applicable

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable**CERCLA**

Not applicable

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know Not applicable

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class Non-controlled

16. Other information


Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Revision Date 10-Feb-2015
Print Date 10-Feb-2015
Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



Health	2
Fire	3
Reactivity	0
Personal Protection	H

Material Safety Data Sheet Acetone MSDS

Section 1: Chemical Product and Company Identification

Product Name: Acetone

Catalog Codes: SLA3502, SLA1645, SLA3151, SLA3808

CAS#: 67-64-1

RTECS: AL3150000

TSCA: TSCA 8(b) inventory: Acetone

CI#: Not applicable.

Synonym: 2-propanone; Dimethyl Ketone; Dimethylformaldehyde; Pyroacetic Acid

Chemical Name: Acetone

Chemical Formula: C₃H₆O

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Acetone	67-64-1	100

Toxicological Data on Ingredients: Acetone: ORAL (LD50): Acute: 5800 mg/kg [Rat]. 3000 mg/kg [Mouse]. 5340 mg/kg [Rabbit]. VAPOR (LC50): Acute: 50100 mg/m 8 hours [Rat]. 44000 mg/m 4 hours [Mouse].

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Classified Reproductive system/toxin/female, Reproductive system/toxin/male [SUSPECTED]. The substance is toxic to central nervous system (CNS). The substance may be toxic to kidneys, the reproductive system, liver, skin. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Get medical attention.

Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if symptoms appear.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 465°C (869°F)

Flash Points: CLOSED CUP: -20°C (-4°F). OPEN CUP: -9°C (15.8°F) (Cleveland).

Flammable Limits: LOWER: 2.6% UPPER: 12.8%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances: Highly flammable in presence of open flames and sparks, of heat.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Slightly explosive in presence of open flames and sparks, of oxidizing materials, of acids.

Fire Fighting Media and Instructions:

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog.

Special Remarks on Fire Hazards: Vapor may travel considerable distance to source of ignition and flash back.

Special Remarks on Explosion Hazards:

Forms explosive mixtures with hydrogen peroxide, acetic acid, nitric acid, nitric acid + sulfuric acid, chromic anhydride, chromyl chloride, nitrosyl chloride, hexachloromelamine, nitrosyl perchlorate, nitryl perchlorate, permonosulfuric acid, thiodiglycol + hydrogen peroxide, potassium ter-butoxide, sulfur dichloride, 1-methyl-1,3-butadiene, bromoform, carbon, air, chloroform, thitriazylperchlorate.

Section 6: Accidental Release Measures

Small Spill:

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container.

Large Spill:

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage**Precautions:**

Keep locked up.. Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapor/spray. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, reducing agents, acids, alkalis.

Storage:

Store in a segregated and approved area (flammables area) . Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Keep away from direct sunlight and heat and avoid all possible sources of ignition (spark or flame).

Section 8: Exposure Controls/Personal Protection**Engineering Controls:**

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 500 STEL: 750 (ppm) from ACGIH (TLV) [United States] TWA: 750 STEL: 1000 (ppm) from OSHA (PEL) [United States] TWA: 500 STEL: 1000 [Australia] TWA: 1185 STEL: 2375 (mg/m3) [Australia] TWA: 750 STEL: 1500 (ppm) [United Kingdom (UK)] TWA: 1810 STEL: 3620 (mg/m3) [United Kingdom (UK)] TWA: 1800 STEL: 2400 from OSHA (PEL) [United States] Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Fruity. Mint-like. Fragrant. Ethereal

Taste: Pungent, Sweetish

Molecular Weight: 58.08 g/mole

Color: Colorless. Clear

pH (1% soln/water): Not available.

Boiling Point: 56.2°C (133.2°F)

Melting Point: -95.35 (-139.6°F)

Critical Temperature: 235°C (455°F)

Specific Gravity: 0.79 (Water = 1)

Vapor Pressure: 24 kPa (@ 20°C)

Vapor Density: 2 (Air = 1)

Volatility: Not available.

Odor Threshold: 62 ppm

Water/Oil Dist. Coeff.: The product is more soluble in water; $\log(\text{oil/water}) = -0.2$

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water.

Solubility: Easily soluble in cold water, hot water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Excess heat, ignition sources, exposure to moisture, air, or water, incompatible materials.

Incompatibility with various substances: Reactive with oxidizing agents, reducing agents, acids, alkalis.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Dermal contact. Eye contact. Inhalation.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 3000 mg/kg [Mouse]. Acute toxicity of the vapor (LC50): 44000 mg/m³ 4 hours [Mouse].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. DEVELOPMENTAL TOXICITY: Classified Reproductive system/toxin/female, Reproductive system/toxin/male [SUSPECTED]. Causes damage to the following organs: central nervous system (CNS). May cause damage to the following organs: kidneys, the reproductive system, liver, skin.

Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans:

May affect genetic material (mutagenicity) based on studies with yeast (*S. cerevisiae*), bacteria, and hamster fibroblast cells. May cause reproductive effects (fertility) based upon animal studies. May contain trace amounts of benzene and formaldehyde which may cancer and birth defects. Human: passes the placental barrier.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: Skin: May cause skin irritation. May be harmful if absorbed through the skin. Eyes: Causes eye irritation, characterized by a burning sensation, redness, tearing, inflammation, and possible corneal injury. Inhalation: Inhalation at high concentrations affects the sense organs, brain and causes respiratory tract irritation. It also may affect the Central Nervous System (behavior) characterized by dizziness, drowsiness, confusion, headache, muscle weakness, and possibly motor incoordination, speech abnormalities, narcotic effects and coma. Inhalation may also affect the gastrointestinal tract (nausea, vomiting). Ingestion: May cause irritation of the digestive (gastrointestinal) tract (nausea, vomiting). It may also

affect the Central Nervous System (behavior), characterized by depression, fatigue, excitement, stupor, coma, headache, altered sleep time, ataxia, tremors as well as the blood, liver, and urinary system (kidney, bladder, ureter) and endocrine system. May also have musculoskeletal effects. Chronic Potential Health Effects: Skin: May cause dermatitis. Eyes: Eye irritation.

Section 12: Ecological Information

Ecotoxicity:

Ecotoxicity in water (LC50): 5540 mg/l 96 hours [Trout]. 8300 mg/l 96 hours [Bluegill]. 7500 mg/l 96 hours [Fathead Minnow]. 0.1 ppm any hours [Water flea].

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The product itself and its products of degradation are not toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 3: Flammable liquid.

Identification: : Acetone UNNA: 1090 PG: II

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause reproductive harm (male) which would require a warning under the statute: Benzene California prop. 65: This product contains the following ingredients for which the State of California has found to cause birth defects which would require a warning under the statute: Benzene California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Benzene, Formaldehyde Connecticut hazardous material survey.: Acetone Illinois toxic substances disclosure to employee act: Acetone Illinois chemical safety act: Acetone New York release reporting list: Acetone Rhode Island RTK hazardous substances: Acetone Pennsylvania RTK: Acetone Florida: Acetone Minnesota: Acetone Massachusetts RTK: Acetone Massachusetts spill list: Acetone New Jersey: Acetone New Jersey spill list: Acetone Louisiana spill reporting: Acetone California List of Hazardous Substances (8 CCR 339): Acetone TSCA 8(b) inventory: Acetone TSCA 4(a) final test rules: Acetone TSCA 8(a) IUR: Acetone

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada):

CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F). CLASS D-2B: Material causing other toxic effects (TOXIC).

DSCL (EEC):

R11- Highly flammable. R36- Irritating to eyes. S9- Keep container in a well-ventilated place. S16- Keep away from sources of ignition - No smoking. S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 3

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 1

Flammability: 3

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information**References:**

-Material safety data sheet issued by: la Commission de la Santé et de la Sécurité du Travail du Québec. -The Sigma-Aldrich Library of Chemical Safety Data, Edition II. -Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987. LOLI, RTECS, HSDB databases. Other MSDSs

Other Special Considerations: Not available.

Created: 10/10/2005 08:13 PM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Version 4.9
Revision Date 04/20/2015
Print Date 12/11/2015

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Anthracene

Product Number : A89200

Brand : Aldrich

CAS-No. : 120-12-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Skin irritation (Category 2), H315

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H315

Causes skin irritation.

H319

Causes serious eye irritation.

H335

May cause respiratory irritation.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P261

Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264

Wash skin thoroughly after handling.

P271

Use only outdoors or in a well-ventilated area.

P273

Avoid release to the environment.

P280

Wear eye protection/ face protection.

P280	Wear protective gloves.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Photosensitizer., Lachrymator.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₁₄ H ₁₀
Molecular weight	: 178.23 g/mol
CAS-No.	: 120-12-7
EC-No.	: 204-371-1

Hazardous components

Component	Classification	Concentration
Anthracene Included in the Candidate List of Substances of Very High Concern (SVHC) according to Regulation (EC) No. 1907/2006 (REACH)		
	Skin Irrit. 2; Eye Irrit. 2A; STOT SE 3; Aquatic Acute 1; Aquatic Chronic 1; H315, H319, H335, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Anthracene	120-12-7	TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		

		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Anthracene	120-12-7	1-Hydroxypyrene (1-HP)		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Chloroprene

Minimum layer thickness: 0.6 mm

Break through time: 480 min

Material tested:Camapren® (KCL 722 / Aldrich Z677493, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 30 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: crystalline Colour: beige
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 210 - 215 °C (410 - 419 °F) - lit.
f) Initial boiling point and boiling range	340 °C (644 °F) - lit.
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Lower explosion limit: 0.6 %(V)
k) Vapour pressure	1.3 hPa (1.0 mmHg) at 145.0 °C (293.0 °F)
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 4.45
p) Auto-ignition temperature	540.0 °C (1,004.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Hypochlorites

10.6 Hazardous decomposition products

Other decomposition products - No data available

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

Inhalation: No data available

Dermal: No data available

LD50 Intraperitoneal - Mouse - 430 mg/kg

Skin corrosion/irritation

Skin - Mouse

Result: Mild skin irritation

Serious eye damage/eye irritation

Irritating to eyes. The preceding data, or interpretation of data, was determined using Quantitative Structure Activity Relationship (QSAR) modeling.

Respiratory or skin sensitisation

Causes photosensitivity. Exposure to light can result in allergic reactions resulting in dermatologic lesions, which can vary from sunburnlike responses to edematous, vesiculated lesions, or bullae

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Anthracene)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: OSHA specifically regulated carcinogen (Anthracene)

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

Inhalation - May cause respiratory irritation.

The preceding data, or interpretation of data, was determined using Quantitative Structure Activity Relationship (QSAR) modeling.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: CA9350000

Possible tumor promoter., Headache, Nausea, Weakness

Blood -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - *Lepomis macrochirus* (Bluegill) - 0.001 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates EC50 - *Daphnia magna* (Water flea) - 0.10 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Indication of bioaccumulation.

Bioaccumulation Pimephales promelas (fathead minnow) - 42 d
- 0.01191 mg/l

Bioconcentration factor (BCF): 649

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Anthracene)
Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Anthracene)
Marine pollutant: yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Anthracene)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Anthracene	120-12-7	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

Anthracene	CAS-No. 120-12-7	Revision Date 2007-07-01
------------	---------------------	-----------------------------

Pennsylvania Right To Know Components

Anthracene	CAS-No. 120-12-7	Revision Date 2007-07-01
------------	---------------------	-----------------------------

New Jersey Right To Know Components

Anthracene	CAS-No. 120-12-7	Revision Date 2007-07-01
------------	---------------------	-----------------------------

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.	CAS-No. 120-12-7	Revision Date 2007-09-28
Anthracene		

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.9

Revision Date: 04/20/2015

Print Date: 12/11/2015

SAFETY DATA SHEET

Benzene

Section 1. Identification

GHS product identifier	: Benzene
Chemical name	: benzene
Other means of identification	: benzene, purebenzol; cyclohexatriene; phenyl hydride; phene; coal naphtha; pyrobenzol
Product use	: Synthetic/Analytical chemistry.
Synonym	: benzene, purebenzol; cyclohexatriene; phenyl hydride; phene; coal naphtha; pyrobenzol
SDS #	: 001062
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253
Emergency telephone number (with hours of operation)	: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	: FLAMMABLE LIQUIDS - Category 2 SKIN CORROSION/IRRITATION - Category 2 SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2 GERM CELL MUTAGENICITY - Category 1B CARCINOGENICITY - Category 1 SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (bone marrow) - Category 1
GHS label elements	
Hazard pictograms	:
Signal word	: Danger
Hazard statements	: Highly flammable liquid and vapor. May form explosive mixtures with air. Causes serious eye irritation. Causes skin irritation. May cause genetic defects. May cause cancer. Causes damage to organs through prolonged or repeated exposure. (bone marrow)
Precautionary statements	
General	: Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Section 2. Hazards identification

- Prevention** : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Wear protective gloves. Wear eye or face protection. Keep away from heat, sparks, open flames and hot surfaces. - No smoking. Use explosion-proof electrical, ventilating, lighting and all material-handling equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Keep container tightly closed. Do not breathe vapor. Do not eat, drink or smoke when using this product. Wash hands thoroughly after handling.
- Response** : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF SWALLOWED: Call a POISON CENTER or physician if you feel unwell. Rinse mouth. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.
- Storage** : Store locked up. Store in a well-ventilated place. Keep cool.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Hazards not otherwise classified** : None known.

Section 3. Composition/information on ingredients

- Substance/mixture** : Substance
- Chemical name** : benzene
- Other means of identification** : benzene, purebenzol; cyclohexatriene; phenyl hydride; phene; coal naphtha; pyrobenzol

CAS number/other identifiers

- CAS number** : 71-43-2
- Product code** : 001062

Ingredient name	%	CAS number
benzene	100	71-43-2

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Section 4. First aid measures

- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. If necessary, call a poison center or physician. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Causes skin irritation.
- Frostbite** : Try to warm up the frozen tissues and seek medical attention.
- Ingestion** : Harmful if swallowed. Irritating to mouth, throat and stomach.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media : Use dry chemical, CO₂, water spray (fog) or foam.

Unsuitable extinguishing media : Do not use water jet.

Specific hazards arising from the chemical : Highly flammable liquid and vapor. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. The vapor/gas is heavier than air and will spread along the ground. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Runoff to sewer may create fire or explosion hazard.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Take precautionary measures against electrostatic discharges. Empty containers retain product residue and can be hazardous. Do not reuse container.

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
benzene	<p>ACGIH TLV (United States, 3/2012). Absorbed through skin. STEL: 8 mg/m³ 15 minutes. STEL: 2.5 ppm 15 minutes. TWA: 1.6 mg/m³ 8 hours. TWA: 0.5 ppm 8 hours.</p> <p>NIOSH REL (United States, 1/2013). STEL: 1 ppm 15 minutes. TWA: 0.1 ppm 10 hours.</p> <p>OSHA PEL (United States, 6/2010). STEL: 5 ppm 15 minutes. TWA: 1 ppm 8 hours.</p> <p>OSHA PEL 1989 (United States, 3/1989). STEL: 5 ppm 15 minutes. TWA: 1 ppm 8 hours.</p> <p>OSHA PEL Z2 (United States, 11/2006). AMP: 50 ppm 10 minutes. CEIL: 25 ppm TWA: 10 ppm 8 hours.</p>

Section 8. Exposure controls/personal protection

- Appropriate engineering controls** : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
- Individual protection measures**
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Liquid. [Watery liquid.]
- Color** : Colorless. Yellowish.
- Molecular weight** : 78.12 g/mole
- Molecular formula** : C₆-H₆
- Boiling/condensation point** : 80.09°C (176.2°F)
- Melting/freezing point** : 5.49°C (41.9°F)
- Critical temperature** : 288.95°C (552.1°F)
- Odor** : Characteristic.
- Odor threshold** : Not available.

Section 9. Physical and chemical properties

pH	: Not available.
Flash point	: Closed cup: -11°C (12.2°F)
Burning time	: Not applicable.
Burning rate	: Not applicable.
Evaporation rate	: 3.5 (butyl acetate = 1)
Flammability (solid, gas)	: Not available.
Lower and upper explosive (flammable) limits	: Lower: 1.2% Upper: 7.8%
Vapor pressure	: 10 kPa (75.006094245 mm Hg) [room temperature]
Vapor density	: 2.7 (Air = 1)
Specific Volume (ft³/lb)	: 1.1403
Gas Density (lb/ft³)	: 0.877 (20°C / 68 to °F)
Relative density	: 0.88
Solubility	: Not available.
Solubility in water	: 1.88 g/l
Partition coefficient: n-octanol/water	: 2.13
Auto-ignition temperature	: 498°C (928.4°F)
Decomposition temperature	: Not available.
SADT	: Not available.
Viscosity	: Dynamic (room temperature): 0.604 mPa·s (0.604 cP)

Section 10. Stability and reactivity

Reactivity	: No specific test data related to reactivity available for this product or its ingredients.
Chemical stability	: The product is stable.
Possibility of hazardous reactions	: Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid	: Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Do not allow vapor to accumulate in low or confined areas.
Incompatibility with various substances	: Highly reactive or incompatible with the following materials: oxidizing materials.
Hazardous decomposition products	: Under normal conditions of storage and use, hazardous decomposition products should not be produced.
Hazardous polymerization	: Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
benzene	LC50 Inhalation Gas.	Rat	10000 ppm	7 hours
	LD50 Oral	Rat	930 mg/kg	-

Irritation/Corrosion

Product/ingredient name	Result	Species	Score	Exposure	Observation
benzene	Eyes - Moderate irritant	Rabbit	-	88 milligrams	-
	Eyes - Severe irritant	Rabbit	-	24 hours 2 milligrams	-
	Skin - Mild irritant	Rat	-	8 hours 60 microliters	-
	Skin - Mild irritant	Rabbit	-	24 hours 15 milligrams	-
	Skin - Moderate irritant	Rabbit	-	24 hours 20 milligrams	-

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

Product/ingredient name	OSHA	IARC	NTP
benzene	+	1	Known to be a human carcinogen.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Name	Category	Route of exposure	Target organs
benzene	Category 1	Not determined	bone marrow

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : Causes serious eye irritation.

Inhalation : No known significant effects or critical hazards.

Section 11. Toxicological information

- Skin contact** : Causes skin irritation.
- Ingestion** : Harmful if swallowed. Irritating to mouth, throat and stomach.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Long term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Potential chronic health effects

Not available.

- General** : Causes damage to organs through prolonged or repeated exposure.
- Carcinogenicity** : May cause cancer. Risk of cancer depends on duration and level of exposure.
- Mutagenicity** : May cause genetic defects.
- Teratogenicity** : No known significant effects or critical hazards.
- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Date of issue/Date of revision : 4/26/2015. *Date of previous issue* : 10/16/2014. *Version* : 0.03 9/14

Section 12. Ecological information

Product/ingredient name	LogP _{ow}	BCF	Potential
benzene	2.13	11	low

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.






Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapor from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

United States - RCRA Toxic hazardous waste "U" List

Ingredient	CAS #	Status	Reference number
Benzene (I,T)	71-43-2	Listed	U019

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1114	UN1114	UN114	UN1114	UN1114
UN proper shipping name	BENZENE	BENZENE	BENZENE	BENZENE	BENZENE
Transport hazard class(es)	3 	3 	3 	3 	3 
Packing group	II	II	II	II	II
Environment	No.	No.	No.	No.	No.
Additional information	Reportable quantity 10 lbs / 4.54 kg [1.3675 gal / 5.1767 L] Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements.	Explosive Limit and Limited Quantity Index 1 Passenger Carrying Road or Rail Index 5	-	-	Passenger and Cargo Aircraft Quantity limitation: 5 L Cargo Aircraft Only Quantity limitation: 60 L Limited Quantities - Passenger Aircraft Quantity limitation: 1 L

Section 14. Transport information

	<p>Limited quantity Yes.</p> <p>Packaging instruction Passenger aircraft Quantity limitation: 5 L</p> <p>Cargo aircraft Quantity limitation: 60 L</p> <p>Special provisions IB2, T4, TP1</p>				
--	---	--	--	--	--

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Special precautions for user : **Transport within user’s premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
United States inventory (TSCA 8b): This material is listed or exempted.
Clean Water Act (CWA) 307: benzene
Clean Water Act (CWA) 311: benzene

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Fire hazard
 Immediate (acute) health hazard
 Delayed (chronic) health hazard

Composition/information on ingredients

Section 15. Regulatory information

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
benzene	100	Yes.	No.	No.	Yes.	Yes.

SARA 313

	Product name	CAS number	%
Form R - Reporting requirements	benzene	71-43-2	100
Supplier notification	benzene	71-43-2	100

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

- Massachusetts** : This material is listed.
New York : This material is listed.
New Jersey : This material is listed.
Pennsylvania : This material is listed.

California Prop. 65

WARNING: This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

Ingredient name	Cancer	Reproductive	No significant risk level	Maximum acceptable dosage level
benzene	Yes.	Yes.	6.4 µg/day (ingestion) 13 µg/day (inhalation)	24 µg/day (ingestion) 49 µg/day (inhalation)

- Canada inventory** : This material is listed or exempted.

International regulations

- International lists** :
- Australia inventory (AICS):** This material is listed or exempted.
 - China inventory (IECSC):** This material is listed or exempted.
 - Japan inventory:** This material is listed or exempted.
 - Korea inventory:** This material is listed or exempted.
 - Malaysia Inventory (EHS Register):** Not determined.
 - New Zealand Inventory of Chemicals (NZIoC):** This material is listed or exempted.
 - Philippines inventory (PICCS):** This material is listed or exempted.
 - Taiwan inventory (CSNN):** Not determined.

- Chemical Weapons Convention List Schedule I Chemicals** : Not listed

- Chemical Weapons Convention List Schedule II Chemicals** : Not listed

- Chemical Weapons Convention List Schedule III Chemicals** : Not listed

Canada

Date of issue/Date of revision : 4/26/2015. Date of previous issue : 10/16/2014. Version : 0.03 12/14

Section 15. Regulatory information

- WHMIS (Canada)** : Class B-2: Flammable liquid
 Class D-2A: Material causing other toxic effects (Very toxic).
 Class D-2B: Material causing other toxic effects (Toxic).
CEPA Toxic substances: This material is listed.
Canadian ARET: This material is not listed.
Canadian NPRI: This material is listed.
Alberta Designated Substances: This material is not listed.
Ontario Designated Substances: This material is not listed.
Quebec Designated Substances: This material is not listed.

Section 16. Other information

- Canada Label requirements** : Class B-2: Flammable liquid
 Class D-2A: Material causing other toxic effects (Very toxic).
 Class D-2B: Material causing other toxic effects (Toxic).

Hazardous Material Information System (U.S.A.)

Health	*	2
Flammability		3
Physical hazards		0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

History

- Date of printing** : 4/26/2015.
Date of issue/Date of revision : 4/26/2015.
Date of previous issue : 10/16/2014.
Version : 0.03

Section 16. Other information

- Key to abbreviations**
- : ATE = Acute Toxicity Estimate
 - BCF = Bioconcentration Factor
 - GHS = Globally Harmonized System of Classification and Labelling of Chemicals
 - IATA = International Air Transport Association
 - IBC = Intermediate Bulk Container
 - IMDG = International Maritime Dangerous Goods
 - LogPow = logarithm of the octanol/water partition coefficient
 - MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
 - UN = United Nations
 - ACGIH – American Conference of Governmental Industrial Hygienists
 - AIHA – American Industrial Hygiene Association
 - CAS – Chemical Abstract Services
 - CEPA – Canadian Environmental Protection Act
 - CERCLA – Comprehensive Environmental Response, Compensation, and Liability Act (EPA)
 - CFR – United States Code of Federal Regulations
 - CPR – Controlled Products Regulations
 - DSL – Domestic Substances List
 - GWP – Global Warming Potential
 - IARC – International Agency for Research on Cancer
 - ICAO – International Civil Aviation Organisation
 - Inh – Inhalation
 - LC – Lethal concentration
 - LD – Lethal dosage
 - NDSL – Non-Domestic Substances List
 - NIOSH – National Institute for Occupational Safety and Health
 - TDG – Canadian Transportation of Dangerous Goods Act and Regulations
 - TLV – Threshold Limit Value
 - TSCA – Toxic Substances Control Act
 - WEEL – Workplace Environmental Exposure Level
 - WHMIS – Canadian Workplace Hazardous Material Information System

References : Not available.

 Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SAFETY DATA SHEET

Based on Directive 2001/58/EC et seq. of the Commission of the European Communities

BENZ[a]ANTHRACENE

1. Identification of the substance/preparation and of the company/undertaking

1.1 Identification of the substance or preparation:

Synonyms: benzo(a)anthracene

CAS No.	: 56-55-3	BCR number	: BCR-271
EC index No.	: 601-033-00-9	NFPA code	: N.D.
EINECS No.	: 200-280-6	Molecular weight	: 228.30
RTECS No.	: CV9275000	Formula	: C18H12

1.2 Use of the substance or the preparation:

Certified reference material for laboratory use only

1.3 Company/undertaking identification:

Institute for Reference Materials and Measurements
Retieseweg
B-2440 Geel
Tel. : +32 14 57 12 11
Fax : +32 14 58 42 73

1.4 Telephone number for emergency:

+32 70 245 245
Antigifcentrum
p/a Militair Hospitaal Koningin Astrid, Bruynstraat, B-1120 Brussel

2. Composition/information on ingredients

Hazardous ingredients	CAS No. EINECS No.	Conc. in %	Hazard symbol	Risks (R-phrases)
Benzo[a]anthracene	56-55-3 200-280-6	100	T;N	45-50/53 (1)

(1) For R-phrases in full: see heading 16

3. Hazards identification

- May cause cancer
- Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

4. First aid measures

4.1 Eye contact:

- Consult a doctor/medical service if irritation persists
- Rinse immediately with water

4.2 Skin contact:

- Consult a doctor/medical service if irritation persists
- Wash with water and soap
- Remove clothing before washing

4.3 After inhalation:

- Consult a doctor/medical service if breathing problems develop
- Remove the victim into fresh air
- Unconscious: maintain adequate airway and respiration

4.4 After ingestion:

- Consult a doctor/medical service if you feel unwell
- Immediately give lots of water to drink
- Never give water to an unconscious person

Printing date : 07-2002
Compiled by : Brandweerinformatiecentrum voor Gevaarlijke Stoffen vzw (BIG)
Technische Schoolstraat 43 A, B-2440 Geel
☎ +32 14 58 45 47 <http://www.big.be> E-mail: info@big.be

1 / 8

MSDS established :
Reference number : BIG\18241GB
Reason for revision : Directive 2001/58/EC
Revision date : 28-03-2002
Revision number : 001

BENZ[a]ANTHRACENE

BENZ[a]ANTHRACENE

5. Fire-fighting measures

- 5.1 **Suitable extinguishing media:**
- Water spray
 - Alcohol foam
 - Polymer foam
 - ABC powder
 - Carbon dioxide
- 5.2 **Unsuitable extinguishing media:**
- Solid water jet ineffective as extinguishing medium
- 5.3 **Special exposure hazards:**
- Not easily combustible
 - Upon combustion CO and CO₂ are formed
- 5.4 **Instructions:**
- Take account of toxic firefighting water
 - Use firefighting water moderately and contain it
- 5.5 **Special protective equipment for firefighters:**
- Heat/fire exposure: compressed air/oxygen apparatus
 - Dust cloud production: compressed air/oxygen apparatus

6. Accidental release measures

- 6.1 **Personal protection/precautions:** see heading 8.1/8.3/10.3
- 6.2 **Environmental precautions:**
- Prevent soil and water pollution
 - Substance must not be discharged into the sewer
 - Dam up the solid spill
- 6.3 **Methods for cleaning up:**
- Stop dust cloud by covering with sand/earth
 - Carefully collect the spill/leftovers
 - Scoop solid spill into closing containers
 - Take collected spill to manufacturer/competent authority
 - Clean contaminated surfaces with an excess of water
 - Wash clothing and equipment after handling

7. Handling and storage

- 7.1 **Handling:**
- Observe strict hygiene
 - Avoid prolonged and repeated contact with skin
 - Avoid raising dust
 - Do not discharge the waste into the drain
 - Remove contaminated clothing immediately
- 7.2 **Storage:**
- Keep container tightly closed. Store in a cool area. Store in a dry area.
 - Store in a dark area.
 - Keep away from: heat sources, ignition sources, oxidizing agents, acids
- | | | | |
|----------------------------|---|------|----|
| Storage temperature | : | N.D. | °C |
| Quantity limits | : | N.D. | kg |
| Storage life | : | N.D. | |
- Materials for packaging** :
- suitable :no data available
 - to avoid :no data available
- 7.3 **Specific uses:**
- See information supplied by the manufacturer

BENZ[a]ANTHRACENE

8. Exposure controls/Personal protection

8.1 Exposure limit values:

TLV-TWA	:	mg/m ³	-	ppm
TLV-STEL	:	mg/m ³	-	ppm
TLV-Ceiling	:	mg/m ³		ppm
OES-LTEL	:	mg/m ³		ppm
OES-STEL	:	mg/m ³		ppm
MAK	:	mg/m ³		ppm
TRK	:	mg/m ³		ppm
MAC-TGG 8 h	:	mg/m ³		
MAC-TGG 15 min.	:	mg/m ³		
MAC-Ceiling	:	mg/m ³		
VME-8 h	:	mg/m ³		ppm
VLE-15 min.	:	mg/m ³		ppm
GWBB-8 h	:	mg/m ³		ppm
GWK-15 min.	:	mg/m ³		ppm
Momentary value	:	mg/m ³		ppm
EC	:	mg/m ³		ppm
EC-STEL	:	mg/m ³		ppm

Sampling methods:

- Benz(a)Anthracene (Polynuclear aromatic hydrocarbons) NIOSH 5506
- Benz(a)Anthracene (Polynuclear aromatic hydrocarbons) NIOSH 5515
- Benz(a)Anthracene OSHA CSI

8.2 Exposure controls:

8.2.1 Occupational exposure controls:

- Measure the concentration in the air regularly
- Work under local exhaust/ventilation

8.2.2 Environmental exposure controls: see heading 13

8.3 Personal protection:

8.3.1 respiratory protection:

- Dust production: dust mask with filter type P3
- High dust production: compressed air/oxygen apparatus

8.3.2 hand protection:

- Gloves
- Suitable materials: No data available
- Breakthrough time: N.D.

8.3.3 eye protection:

- Safety glasses
- In case of dust production: protective goggles

8.3.4 skin protection:

- Protective clothing
- In case of dust production: head/neck protection
- Suitable materials: No data available

BENZ[a]ANTHRACENE

9. Physical and chemical properties

9.1 General information:

Appearance (at 20°C)	: Crystalline solid / Scales
Odour	: Odourless
Colour	: Colourless to fluorescent yellow-green

9.2 Important health, safety and environmental information:

pH value	: N.D.	
Boiling point/boiling range	: N.A.	°C
Flashpoint	: N.D.	°C
Explosion limits	: N.D.	vol% (°C)
Vapour pressure (at 20°C)	: 0.00007	hPa
Vapour pressure (at 50°C)	: N.D.	hPa
Relative density (at 20°C)	: 1.3	
Water solubility	: 0.00001	g/100 ml
Soluble in	: Ether, acetone, oils/fats	
Relative vapour density	: N.D.	
Viscosity	: N.D.	Pa.s
Partition coefficient n-octanol/water	: 5.61/5.79	
Evaporation rate		
ratio to butyl acetate	: N.D.	
ratio to ether	: N.D.	

9.3 Other information:

Melting point/melting range	: 160	°C
Auto-ignition point	: N.D.	°C
Saturation concentration	: N.D.	g/m ³

10. Stability and reactivity

10.1 Conditions to avoid/reactivity:

- Stable under normal conditions

10.2 Materials to avoid:

- Keep away from: heat sources, ignition sources, oxidizing agents, acids

10.3 Hazardous decomposition products:

- Upon combustion CO and CO₂ are formed
- Reacts violently with (strong) oxidizers
- Decomposes on exposure to (strong) acids

11. Toxicological information

11.1 Acute toxicity:

LD50 oral rat	: N.D.	mg/kg
LD50 dermal rat	: N.D.	mg/kg
LD50 dermal rabbit	: N.D.	mg/kg
LC50 inhalation rat	: N.D.	mg/l/4 h
LC50 inhalation rat	: N.D.	ppm/4 h

BENZ[a]ANTHRACENE

11.2 Chronic toxicity:

EC carc. cat. : 2
EC muta. cat. : not listed
EC repr. cat. : not listed

Carcinogenicity (TLV) : A2
Carcinogenicity (MAC) : K
Carcinogenicity (VME) : not listed
Carcinogenicity (GWBB) : not listed

Carcinogenicity (MAK) : 2
Mutagenicity (MAK) : not listed
Teratogenicity (MAK) : -

IARC classification : 2A

11.3 Routes of exposure: ingestion, inhalation, eyes and skin
Caution! Substance is absorbed through the skin

11.4 Acute effects/symptoms:

AFTER SKIN CONTACT
- Slight irritation

11.5 Chronic effects:

- Probably human carcinogenic
- Mutagenicity: AMES test positive
- Probably human mutagenic

ON CONTINUOUS/REPEATED EXPOSURE/CONTACT:
- No specific information available

SIMILAR PRODUCTS CAUSE FOLLOWING SYMPTOMS:
- Feeling of weakness
- Photoallergy
- Skin rash/inflammation
- Cracking of the skin
- Skin cancer
- Lung tissue affection/degeneration
- Enlargement/affection of the liver
- Affection of the renal tissue

12. Ecological information

12.1 Ecotoxicity:

- LC50 (65 h) : 0.0018 mg/l (PIMEPHALES PROMELAS)
- EC50 (96 h) : 0.01 mg/l (DAPHNIA PULEX)

12.2 Mobility:

- Volatile organic compounds (VOC): 0%
- Photolysis in water
- Ozonation in water
- Insoluble in water

For other physicochemical properties see heading 9.

12.3 Persistence and degradability:

- biodegradation BOD₅ : N.D. % ThOD
- water : - Not readily biodegradable in water
- soil : T $\frac{1}{2}$: > 100 days

12.4 Bioaccumulative potential:

- log P_{ow} : 5.61/5.79
- BCF : 72 h : 350 (LEUCISCUS IDUS)
- Highly bioaccumulative

BENZ[a]ANTHRACENE

12.5 Other adverse effects:

- **WGK** : 3 (Classification based on the R-phrases in compliance with Verwaltungsvorschrift wassergefährdender Stoffe (VwVwS) of 17 May 1999)
- **Effect on the ozone layer** : Not dangerous for the ozone layer (Council Regulation (EC) 3093/94)
- **Greenhouse effect** : no data available
- **Effect on waste water purification** : no data available

13. Disposal considerations

13.1 Provisions relating to waste:

- Waste material code (91/689/EEC, Council Decision 2001/118/EC, O.J. L47 of 16/2/2001): 16 05 06 (laboratory chemicals, consisting of or containing dangerous substances, including mixtures of laboratory chemicals)
- Waste material code (Flanders): 001, 045, 691
- Waste code (Germany): 59302
- Hazardous waste (91/689/EEC)

13.2 Disposal methods:

- Dissolve or mix with a combustible solvent
- Remove to an authorized incinerator equipped with an afterburner and a flue gas scrubber
- Do not discharge into surface water (2000/60/EEC, Council Decision 2455/2001/EC)

13.3 Packaging/Container:

- Waste material code packaging (91/689/EEC, Council Decision 2001/118/EC, O.J. L47 of 16/2/2001): 15 01 10 (packaging containing residues of or contaminated by dangerous substances)

BENZ[a]ANTHRACENE

14. Transport information

90

3077

- 14.1 Classification of the substance in compliance with UN Recommendations
- | | |
|----------------------|--|
| UN number | : 3077 |
| CLASS | : 9 |
| SUB RISKS | : - |
| PACKING | : III |
| PROPER SHIPPING NAME | : UN 3077, Environmentally hazardous substance, solid, n.o.s. (benzo[a]anthracene) |
- 14.2 ADR (transport by road)
- | | |
|-----------------------|-------|
| CLASS | : 9 |
| PACKING | : III |
| DANGER LABEL TANKS | : 9 |
| DANGER LABEL PACKAGES | : 9 |
- 14.3 RID (transport by rail)
- | | |
|-----------------------|-------|
| CLASS | : 9 |
| PACKING | : III |
| DANGER LABEL TANKS | : 9 |
| DANGER LABEL PACKAGES | : 9 |
- 14.4 ADNR (transport by inland waterways)
- | | |
|-----------------------|-------|
| CLASS | : 9 |
| PACKING | : III |
| DANGER LABEL TANKS | : 9 |
| DANGER LABEL PACKAGES | : 9 |
- 14.5 IMDG (maritime transport)
- | | |
|------------------|-------|
| CLASS | : 9 |
| SUB RISKS | : - |
| PACKING | : III |
| MFAG | : - |
| EMS | : - |
| MARINE POLLUTANT | : P |
- 14.6 ICAO (air transport)
- | | |
|---|-------|
| CLASS | : 9 |
| SUB RISKS | : - |
| PACKING | : III |
| PACKING INSTRUCTIONS PASSENGER AIRCRAFT | : |
| PACKING INSTRUCTIONS CARGO AIRCRAFT | : |
- 14.7 Special precautions in connection with transport : none
- 14.8 Limited quantities (LQ) :

When substances and their packaging meet the conditions established by ADR/RID/ADNR in chapter 3.4, **only** the following prescriptions shall be complied with:
each package shall display a diamond-shaped figure with the following inscription:
- 'UN 3077'
or, in the case of different goods with different identification numbers within a single package:
- the letters 'LQ'

BENZ[a]ANTHRACENE

15. Regulatory information

Enumerated in substance list Annex I of directive 67/548/EEC et sequens



Toxic



Dangerous for the environment

- R45 : May cause cancer
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment
- S53 : Avoid exposure - obtain special instructions before use
S45 : In case of accident or if you feel unwell, seek medical advice (show the label where possible)
S60 : This material and/or its container must be disposed of as hazardous waste
S61 : Avoid release to the environment. Refer to special instructions/safety data sheets.

16. Other information

The information provided on this MSDS is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

N.A. = NOT APPLICABLE
N.D. = NOT DETERMINED
* = INTERNAL CLASSIFICATION

Full text of any R-phrases referred to under heading 2:

- R45 : May cause cancer
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

Exposure limits:

TLV : Threshold Limit Value - ACGIH USA 2000
OES : Occupational Exposure Standards - United Kingdom 1999
MEL : Maximum Exposure Limits - United Kingdom 1999
MAK : Maximale Arbeitsplatzkonzentrationen - Germany 2001
TRK : Technische Richtkonzentrationen - Germany 2001
MAC : Maximale aanvaarde concentratie - The Netherlands 2002
VME : Valeurs limites de Moyenne d'Exposition - France 1999
VLE : Valeurs limites d'Exposition à court terme - France 1999
GWBB : Grenswaarde beroepsmatige blootstelling - Belgium 1998
GWK : Grenswaarde kortstondige blootstelling - Belgium 1998
EC : Indicative occupational exposure limit values - directive 2000/39/EC

Chronic toxicity:

K : List of the carcinogenic substances and processes - The Netherlands 2002

Material Safety Data Sheet

Benzo[a]pyrene, 98%

ACC# 37175

Section 1 - Chemical Product and Company Identification

MSDS Name: Benzo[a]pyrene, 98%

Catalog Numbers: AC105600000, AC105600010, AC105601000, AC377200000, AC377200010, AC377201000 AC377201000

Synonyms: 3,4-Benzopyrene; 3,4-Benzpyrene; Benzo[def]chrysene.

Company Identification:

Acros Organics N.V.
One Reagent Lane
Fair Lawn, NJ 07410

For information in North America, call: 800-ACROS-01

For emergencies in the US, call CHEMTREC: 800-424-9300

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
50-32-8	Benzo[a]pyrene	>96	200-028-5

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: yellow to brown powder.

Danger! May cause harm to the unborn child. May impair fertility. May cause eye, skin, and respiratory tract irritation. Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Cancer hazard. May cause allergic skin reaction. May cause heritable genetic damage.

Target Organs: Reproductive system, skin.

Potential Health Effects

Eye: May cause eye irritation.

Skin: May cause skin irritation. May be harmful if absorbed through the skin. May cause an allergic reaction in certain individuals.

Ingestion: May cause irritation of the digestive tract. The toxicological properties of this substance have not been fully investigated. May be harmful if swallowed.

Inhalation: May cause respiratory tract irritation. The toxicological properties of this substance have not been fully investigated. May be harmful if inhaled.

Chronic: May cause cancer in humans. May cause reproductive and fetal effects. Laboratory experiments have resulted in mutagenic effects.

Section 4 - First Aid Measures

Eyes: Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.

Skin: Get medical aid. Flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse.

Ingestion: Never give anything by mouth to an unconscious person. Get medical aid. Do NOT induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cupfuls of milk or water.

Inhalation: Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: Treat symptomatically and supportively.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion.

Extinguishing Media: Use water spray, dry chemical, carbon dioxide, or appropriate foam.

Flash Point: Not available.

Autoignition Temperature: Not available.

Explosion Limits, Lower: Not available.

Upper: Not available.

NFPA Rating: (estimated) Health: 2; Flammability: 0; Instability: 0

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks: Clean up spills immediately, observing precautions in the Protective Equipment section. Sweep up, then place into a suitable container for disposal. Avoid generating dusty conditions. Provide ventilation.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Use with adequate ventilation. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Keep container tightly closed. Avoid ingestion and inhalation.

Storage: Store in a tightly closed container. Store in a cool, dry, well-ventilated area away from incompatible substances.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs

Benzo[a]pyrene	0.2 mg/m3 TWA (as benzene soluble aerosol) (listed under Coal tar pitches).	0.1 mg/m3 TWA (cyclohexane-extractable fraction) (listed under Coal tar pitches).80 mg/m3 IDLH (listed under Coal tar pitches).	0.2 mg/m3 TWA (as benzene soluble fraction) (listed under Coal tar pitches).
----------------	---	---	--

OSHA Vacated PELs: Benzo[a]pyrene: No OSHA Vacated PELs are listed for this chemical.

Personal Protective Equipment

Eyes: Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

Section 9 - Physical and Chemical Properties

Physical State: Powder

Appearance: yellow to brown

Odor: faint aromatic odor

pH: Not available.

Vapor Pressure: Not available.

Vapor Density: Not available.

Evaporation Rate:Not available.

Viscosity: Not available.

Boiling Point: 495 deg C @ 760 mm Hg

Freezing/Melting Point:175 - 179 deg C

Decomposition Temperature:Not available.

Solubility: 1.60x10⁻³ mg/l @25°C

Specific Gravity/Density:Not available.

Molecular Formula:C₂₀H₁₂

Molecular Weight:252.31

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.

Conditions to Avoid: Dust generation.

Incompatibilities with Other Materials: Strong oxidizing agents.

Hazardous Decomposition Products: Carbon monoxide, carbon dioxide.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#:

CAS# 50-32-8: DJ3675000

LD50/LC50:

Not available.

Carcinogenicity:

CAS# 50-32-8:

- **ACGIH:** A2 - Suspected Human Carcinogen
- **California:** carcinogen, initial date 7/1/87
- **NTP:** Suspect carcinogen
- **IARC:** Group 1 carcinogen (listed as Coal tar pitches).

Epidemiology: No information found

Teratogenicity: No information found

Reproductive Effects: Adverse reproductive effects have occurred in experimental animals.

Mutagenicity: Mutagenic effects have occurred in humans. Mutagenic effects have occurred in experimental animals.

Neurotoxicity: No information found

Other Studies:

Section 12 - Ecological Information

No information available.

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed.

RCRA U-Series:

CAS# 50-32-8: waste number U022.

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	NOT REGULATED FOR DOMESTIC TRANSPORT	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOL (Benzo{a} pyrene)
Hazard Class:		9
UN Number:		UN3077
Packing Group:		III

Section 15 - Regulatory Information

US FEDERAL

TSCA

CAS# 50-32-8 is listed on the TSCA inventory.

Health & Safety Reporting List

None of the chemicals are on the Health & Safety Reporting List.

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

CAS# 50-32-8: 1 lb final RQ; 0.454 kg final RQ

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPQ.

SARA Codes

CAS # 50-32-8: immediate, delayed.

Section 313

This material contains Benzo[a]pyrene (CAS# 50-32-8, >96%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR

Clean Air Act:

This material does not contain any hazardous air pollutants.

This material does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors.

Clean Water Act:

None of the chemicals in this product are listed as Hazardous Substances under the CWA.

CAS# 50-32-8 is listed as a Priority Pollutant under the Clean Water Act.

None of the chemicals in this product are listed as Toxic Pollutants under the CWA.

OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

CAS# 50-32-8 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

California Prop 65**The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act:**

WARNING: This product contains Benzo[a]pyrene, a chemical known to the state of California to cause cancer.

California No Significant Risk Level: CAS# 50-32-8: 0.06 μ g/day NSRL

European/International Regulations**European Labeling in Accordance with EC Directives****Hazard Symbols:**

T N

Risk Phrases:

R 43 May cause sensitization by skin contact.

R 45 May cause cancer.

R 46 May cause heritable genetic damage.

R 60 May impair fertility.

R 61 May cause harm to the unborn child.

R 50/53 Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Safety Phrases:

S 45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

- S 53 Avoid exposure - obtain special instructions before use.
S 60 This material and its container must be disposed of as hazardous waste.
S 61 Avoid release to the environment. Refer to special instructions /safety data sheets.

WGK (Water Danger/Protection)

CAS# 50-32-8: No information available.

Canada - DSL/NDSL

CAS# 50-32-8 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of D2A.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

CAS# 50-32-8 is listed on the Canadian Ingredient Disclosure List.

Section 16 - Additional Information
--

MSDS Creation Date: 9/02/1997

Revision #7 Date: 6/30/2006

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.

BCR-048R: benzo[k]fluoranthene

1. Identification of the substance/preparation and of the company/undertaking

1.1 Identification of the substance or preparation:

Product name: BCR-048R: benzo[k]fluoranthene
CAS number 207-08-9
EC index number 601-036-00-5
EINECS number 205-916-6
RTECS number DF6350000
Molecular mass 252.32 g/mol
Formula C20H12

1.2 Use of the substance/preparation:

Certified reference material for laboratory use only

1.3 Company/undertaking identification:

Institute for Reference Materials and Measurements
Retieseweg
B-2440 Geel
Tel: +32 14 57 12 11
Fax: +32 14 59 04 06
JRC-IRMM-RM-Sales@ec.europa.eu

1.4 Emergency telephone:

Poison Centre: +32 70 245 245

2. Hazards identification

NFPA: 1-1-2(*)

DSD/DPD

May cause cancer
Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

Other hazards

Its dust is explosive with air
Dust cloud can be ignited by a spark
Slightly irritant to skin
Slightly irritant to eyes
Caution! Substance is absorbed through the skin
No certainty about human mutagenic properties
Highly bioaccumulative
Not readily biodegradable in water

CLP

Carc. 1B May cause cancer. (H350)
Aquatic Acute 1 Very toxic to aquatic life. (H400)
Aquatic Chronic 1 Very toxic to aquatic life with long lasting effects. (H410)

Other hazards

Its dust is explosive with air
Dust cloud can be ignited by a spark
Slightly irritant to skin
Slightly irritant to eyes
Caution! Substance is absorbed through the skin
No certainty about human mutagenic properties
Highly bioaccumulative
Not readily biodegradable in water

BCR-048R: benzo[k]fluoranthene

3. Composition/information on ingredients

Name	CAS No EINECS/ELINCS	Conc.	Classification according to DSD/DPD	Classification according to CLP	Note
benzo[k]fluoranthene	207-08-9 205-916-6		Carc. Cat. 2; R45 N; R50-53	Carc. 1B; H350 Aquatic Acute 1; H400 Aquatic Chronic 1; H410	

4. First aid measures

4.1 After inhalation:

Remove the victim into fresh air
Respiratory problems: consult a doctor/medical service

4.2 Skin contact:

Rinse with water
Do not apply (chemical) neutralizing agents
Take victim to a doctor if irritation persists

4.3 Eye contact:

Rinse with water
Do not apply neutralizing agents
Take victim to an ophthalmologist if irritation persists

4.4 After ingestion:

Rinse mouth with water
Immediately after ingestion: give lots of water to drink
Do not induce vomiting
Consult a doctor/medical service if you feel unwell

5. Fire-fighting measures

5.1 Suitable extinguishing media:

Water spray
Polyvalent foam
ABC powder
Carbon dioxide

5.2 Unsuitable extinguishing media:

No unsuitable extinguishing media known

5.3 Special exposure hazards:

Heating increases the fire hazard
Dust cloud can be ignited by a spark
Upon combustion CO and CO₂ are formed

5.4 Instructions:

Take account of toxic fire-fighting water
Use water moderately and if possible collect or contain it

5.5 Special protective equipment for fire-fighters:

Gloves
Protective clothing
Heat/fire exposure: compressed air/oxygen apparatus

6. Accidental release measures

6.1 Personal precautions:

See heading 8.2

6.2 Environmental precautions:

Dam up the solid spill
Prevent soil and water pollution
Prevent spreading in sewers

BCR-048R: benzo[k]fluoranthene

See heading 13

6.3 Methods for cleaning up:

- Scoop solid spill into closing containers
- Carefully collect the spill/leftovers
- Clean contaminated surfaces with an excess of water
- Take collected spill to manufacturer/competent authority
- Wash clothing and equipment after handling

7. Handling and storage

7.1 Handling:

- Avoid raising dust
- Warning! Avoid exposure
- Keep away from naked flames/heat
- Obtain special instructions before use
- Observe strict hygiene
- Keep container tightly closed
- Do not discharge the waste into the drain

7.2 Storage:

Safe storage requirements:

- Store in a cool area
- Store in a dry area
- Keep container in a well-ventilated place
- Keep locked up
- Unauthorized persons are not admitted
- Meet the legal requirements

Keep away from:

- oxidizing agents
- (strong) acids

7.3 Specific use(s):

See information supplied by the manufacturer for the identified use(s)

8. Exposure controls/Personal protection

8.1 Exposure limit values:

8.1.1 Occupational exposure:

If limit values are applicable and available these will be listed below.

8.1.2 Sampling methods:

Product name	Test	Number	Sampling method	Remarks
Benz(a)Anthracene	OSHA	CSI		
Benz(a)Anthracene (Polynuclear aromatic hydrocarbons)	NIOSH	5506	adsorption tubes	
Benz(a)Anthracene (Polynuclear aromatic hydrocarbons)	NIOSH	5515	adsorption tubes	

8.2 Exposure controls:

8.2.1 Occupational exposure controls:

- Measure the concentration in the air regularly
- Carry operations in the open/under local exhaust/ventilation or with respiratory protection

Personal protective equipment:

- Respiratory protection:
 - Dust production: dust mask with filter type P3
- Hand protection:
 - Gloves
- Eye protection:
 - Safety glasses
 - In case of dust production: protective goggles
- Skin protection:
 - Protective clothing

8.2.2 Environmental exposure controls:

BCR-048R: benzo[k]fluoranthene

See headings 6.2, 6.3 and 13

9. Physical and chemical properties

9.1 General information:

Physical form	Crystalline solid Needles
Colour	Light yellow

9.2 Important health, safety and environmental information:

Boiling point	480 °C
Vapour pressure (20°C)	< 0.00001 hPa
Solubility in water	< 0.00001 g/100 ml
Solubility in solvents	Soluble in ethanol Soluble in acetic acid Soluble in oils/fats
Log Pow	6.84

9.3 Other information:

Melting point	217 °C
---------------	--------

10. Stability and reactivity

10.1 Conditions to avoid:

Possible fire hazard

heat sources
ignition sources

Stability

No data available

Reactions

Reacts violently with (strong) oxidizers

10.2 Materials to avoid:

oxidizing agents
(strong) acids

10.3 Hazardous decomposition products:

Upon combustion CO and CO₂ are formed

11. Toxicological information

11.1 Acute toxicity:

No (test) data available.

11.2 Chronic toxicity:

Probably human carcinogenic
No certainty about human mutagenic properties
Not classified as toxic to reproduction (EC)

BCR-048R: benzo[k]fluoranthene

EC carc cat	2
Listed in SZW - List of carcinogenic substances	yes
IARC - classification	2B
MAK - Krebszeugend Kategorie	2
MAK - Keimzellmutagen Kategorie	3B
MAK - Schwangerschaft Gruppe	-
CLP carc cat	category 1B

11.3 Acute effects/symptoms:

Inhalation:

No data available

Skin contact:

Revision number: 0200

Product number: 49287

Reference number: BCR-048R

4 / 8

BCR-048R: benzo[k]fluoranthene

Slight irritation

Eye contact:

Slight irritation

Ingestion:

No data available

11.4 Chronic effects:

ON CONTINUOUS/REPEATED EXPOSURE/CONTACT:

No specific information available

SIMILAR PRODUCTS CAUSE FOLLOWING SYMPTOMS:

Feeling of weakness

Cracking of the skin

Skin rash/inflammation

Photoallergy

Skin cancer

Lung tissue affection/degeneration

Enlargement/affection of the liver

Affection of the renal tissue

12. Ecological information

12.1 Ecotoxicity:

No (test) data available.

12.2 Mobility:

Volatile organic compounds (VOC)

0 %

Solubility in/reaction with water

Insoluble in water

Water physicochemical processes

Forming sediments in water

Soil physicochemical processes

Adsorbs into the soil

12.3 Persistence and degradability:

Water abiotic degradation processes

Ozonation in water

Half-life soil

65 - 1400 days

Not readily biodegradable in water

12.4 Bioaccumulative potential:

Log Pow

6.84

Highly bioaccumulative

12.5 Results of PBT assessment:

Not applicable, based on available data

12.6 Other adverse effects:

Not dangerous for the ozone layer (Council Regulation (EC) no 1005/2009)

13. Disposal considerations

13.1 Provisions relating to waste:

Waste material code (Directive 2008/98/EC, decision 2001/118/EC)

16 05 06* : laboratory chemicals, consisting of or containing dangerous substances, including mixtures of laboratory chemicals

Depending on branch of industry and production process, also other EURAL codes may be applicable

Hazardous waste according to Directive 2008/98/EC

13.2 Disposal methods:

Dissolve or mix with a combustible solvent

Remove to an authorized incinerator equipped with an afterburner and a flue gas scrubber with energy recovery

Remove waste in accordance with local and/or national regulations

Do not discharge into surface water (2000/60/EC, Council decision 2455/2001/EC, O.J. L331 of 15/12/2001)

13.3 Packaging/Container:

Waste material code packaging (Directive 2008/98/EC)

15 01 10* : packaging containing residues of or contaminated by dangerous substances

{13.4 Entsorgung verschmutzter Gebinde:}

BCR-048R: benzo[k]fluoranthene

14. Transport information

ADR

Proper shipping name	Environmentally hazardous substance, solid, n.o.s.
Techn./chem. name ADR	benzo[k]fluoranthene
UN number	3077
Class	9
Packing group	III
Hazard identification number	90
Classification code	M7
Labels	9
Environmentally hazardous substance mark	yes

RID

Proper shipping name	Environmentally hazardous substance, solid, n.o.s.
Techn./chem. name RID	benzo[k]fluoranthene
UN number	3077
Class	9
Packing group	III
Classification code	M7
Labels	9
Environmentally hazardous substance mark	yes

ADNR

Proper shipping name	Environmentally hazardous substance, solid, n.o.s.
Techn./chem. name ADNR	benzo[k]fluoranthene
UN number	3077
Class	9
Packing group	III
Classification code	M7
Labels	9
Environmentally hazardous substance mark	yes

IMO

Proper shipping name	Environmentally hazardous substance, solid, n.o.s.
Techn./chem. name IMO	benzo[k]fluoranthene
UN number	3077
Class	9
Packing group	III
Labels	9
Marine pollutant	P
Environmentally hazardous substance mark	yes

ICAO

Proper shipping name	Environmentally hazardous substance, solid, n.o.s.
Techn./chem. name ICAO	benzo[k]fluoranthene
UN number	3077
Class	9
Packing group	III
Labels	9
Environmentally hazardous substance mark	yes

15. Regulatory information

15.1 EU Legislation:

BCR-048R: benzo[k]fluoranthene

DSD/DPD

Enumerated in substance list Annex I of directive 67/548/EEC et sequens



Dangerous for the environment

R-phrases

45	May cause cancer
50/53	Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

S-phrases

53	Avoid exposure - obtain special instructions before use
45	In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible)
60	This material and its container must be disposed of as hazardous waste
61	Avoid release to the environment. Refer to special instructions/safety data sheets.

Additional recommendations

	Restricted to professional users.
--	-----------------------------------

CLP

Classification and labelling according to Regulation (EC) No 1272/2008 – Annex VI and after evaluation of available test data



Signal word

Dgr	Danger
-----	--------

H-statements

H350	May cause cancer.
H410	Very toxic to aquatic life with long lasting effects.

P-statements

P202	Do not handle until all safety precautions have been read and understood.
P281	Use personal protective equipment as required.
P273	Avoid release to the environment.
P308 + P313	IF exposed or concerned: Get medical advice/attention.
P391	Collect spillage.
P405	Store locked up.

Supplemental information

	Restricted to professional users.
--	-----------------------------------

15.2 National provisions:

15.3 Specific community rules:

Enumerated in Annex XVII of Regulation (EC) No. 1907/2006: Restrictions on the manufacture, placing on the market and use of certain dangerous substances, mixtures and articles.

Legislation

EG/552/2009

EG/552/2009

Reference legislation

See column 1: 28.

See column 1: 50. g)

16. Other information

BCR-048R: benzo[k]fluoranthene

The information in this safety data sheet is based on data and samples provided to BIG. The sheet was written to the best of our ability and according to the state of knowledge at that time. The safety data sheet only constitutes a guideline for the safe handling, use, consumption, storage, transport and disposal of the substances/preparations/mixtures mentioned under point 1. New safety data sheets are written from time to time. Only the most recent versions may be used. Old versions must be destroyed. Unless indicated otherwise word for word on the safety data sheet, the information does not apply to substances/preparations/mixtures in purer form, mixed with other substances or in processes. The safety data sheet offers no quality specification for the substances/preparations/mixtures in question.

Compliance with the instructions in this safety data sheet does not release the user from the obligation to take all measures dictated by common sense, regulations and recommendations or which are necessary and/or useful based on the real applicable circumstances. BIG does not guarantee the accuracy or exhaustiveness of the information provided. Use of this safety data sheet is subject to the licence and liability limiting conditions as stated in your BIG licence agreement. All intellectual property rights to this sheet are the property of BIG and its distribution and reproduction are limited. Consult your BIG licence agreement for details.

(*) = INTERNAL CLASSIFICATION (NFPA)

PBT-substances = persistent, bioaccumulative and toxic substances

DSD Dangerous Substance Directive

DPD Dangerous Preparation Directive

CLP (EU-GHS) Classification, labelling and packaging (Globally Harmonised System in Europe)

Full text of any R-phrases referred to under headings 2 and 3:

R45	May cause cancer
R50/53	Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

Full text of any H-statements referred to under headings 2 and 3:

H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

Full text of any classes referred to under headings 2 and 3:

Aquatic Acute	Hazardous to the aquatic environment - acute
Aquatic Chronic	Hazardous to the aquatic environment - chronic
Carc.	Carcinogenicity

1. IDENTIFICATION

Catalog Number / Product Name: 31272, 31272-5XX, & 31372 / Benzo (b) Fluoranthene Standard
Company: Restek Corporation
Address: 110 Benner Circle
Bellefonte, Pa. 16823
Phone#: 814-353-1300
Fax#: 814-353-1309
Emergency#: 1-800-424-9300 (CHEMTREC)
+1 703-741-5970 (Outside the US)
Email: sds@restek.com
Revision Number: 8
Intended use: For Laboratory use only

2. HAZARD(S) IDENTIFICATION

Emergency Overview:

GHS Hazard Symbols:



GHS Classification: Flammable Liquid Category 2
Specific Target Organ Systemic Toxicity (STOT) - Single Exposure Category 3

GHS Signal Word: Danger

GHS Hazard: Highly flammable liquid and vapour.
May cause drowsiness or dizziness.

GHS Precautions:

Safety Precautions: Keep away from heat/sparks/open flames/hot surfaces. – No smoking.
Ground/bond container and receiving equipment.
Use explosion-proof electrical/ventilation and lighting equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.
Avoid breathing dust/fume/gas/mist/vapours/spray.
Use only outdoors or in a well-ventilated area.
Wear protective gloves/protective clothing/eye protection/face protection.

First Aid Measures: IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
Call a POISON CENTER or doctor/physician if you feel unwell.
In case of fire: Use extinguishing media in section 5 for extinction.

Storage: Store in a well-ventilated place. Keep container tightly closed.
Store in a well-ventilated place. Keep cool.
Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

Single Exposure Target Organs: No data available.

Repeated Exposure Target Organs: No data available.

3. COMPOSITION / INFORMATION ON INGREDIENT

Chemical Name	CAS #	EINEC #	% Composition
Acetone	67-64-1	200-662-2	99.900000
benzo (b) fluoranthene	205-99-2	205-911-9	0.100000

4. FIRST-AID MEASURES

Inhalation:	Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not breathing, give artificial respiration and have a trained individual administer oxygen. Get medical attention immediately
Eyes:	Flush eyes with plenty of water for at least 20 minutes retracting eyelids often. Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention.
Skin Contact:	Wash with soap and water. Remove contaminated clothing and launder. Get medical attention if irritation develops or persists.
Ingestion:	Do not induce vomiting and seek medical attention immediately. Drink two glasses of water or milk to dilute. Provide medical care provider with this SDS.

5. FIRE- FIGHTING MEASURES

Extinguishing Media:	Use alcohol resistant foam, carbon dioxide, or dry chemical extinguishing agents. Water spray or fog may also be effective for extinguishing if swept across the base of the fire. Water can also be used to absorb heat and keep exposed material from being damaged by fire. Flammable component(s) of this material may be lighter than water and burn while floating on the surface.
Fire and/or Explosion Hazards:	Vapors may be ignited by heat, sparks, flames or other sources of ignition at or above the low flash point giving rise to a Class B fire. Vapors are heavier than air and may travel to a source of ignition and flash back
Fire Fighting Methods and Protection:	Do not enter fire area without proper protection including self-contained toxic breathing apparatus and full protective equipment. Fight fire from a safe distance and a protected location due to the potential of hazardous vapors and decomposition products. Flammable component(s) of this material may be lighter than water and burn while floating on the surface. Use water spray/fog for cooling.
Hazardous Combustion Products:	Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions and Equipment:	Exposure to the spilled material may be irritating or harmful. Follow personal protective equipment recommendations found in Section 8 of this SDS. Additional precautions may be necessary based on special circumstances created by the spill including; the material spilled, the quantity of the spill, the area in which the spill occurred. Also consider the expertise of employees in the area responding to the spill.
Methods for Clean-up:	Prevent the spread of any spill to minimize harm to human health and the environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal evaluation.

7. HANDLING AND STORAGE

Handling Technical Measures and Precautions:	Harmful or irritating material. Avoid contacting and avoid breathing the material. Use only in a well ventilated area. Use spark-proof tools and explosion-proof equipment
Storage Technical Measures and Conditions:	Store in a cool dry ventilated location. Isolate from incompatible materials and conditions. Keep container(s) closed. Keep away from sources of ignition

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

United States:

Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
Acetone	67-64-1	2500 ppm IDLH (10% LEL)	750 ppm STEL; 750 ppm STEL;	500 ppm TWA; 500 ppm TWA; 1188 mg/m3	1000 ppm TWA; 2400 mg/m3 TWA

Personal Protection:

Engineering Measures: Local exhaust ventilation is recommended when generating excessive levels of vapors from handling or thermal processing.

Respiratory Protection: No respiratory protection required under normal conditions of use. Provide general room exhaust ventilation if symptoms of overexposure occur as explained Section 3. A respirator is not normally required.

Eye Protection: Wear chemically resistant safety glasses with side shields when handling this product. Do not wear contact lenses.

Skin Protection: Wear protective gloves. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when leaving work

Medical Conditions Aggravated By Exposure: Respiratory disease including asthma and bronchitis

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color:	Depends upon product selection
Odor:	Strong
Physical State:	No data available.
pH:	No data available
Vapor Density:	2.0 (air = 1)
Melting Point:	-95.4 °C Melting Point
Flash Point:	39
Flammability:	Highly Flammable
Upper Flammable/Explosive Limit, % in air:	No data available.
Lower Flammable/Explosive Limit, % in air:	No data available.
Autoignition Temperature:	465 deg C
Decomposition Temperature:	No data available.
Specific Gravity:	0.7845 g/cm3 at 25 °C
Evaporation Rate:	No data available.
Odor Threshold:	ND
Solubility:	Complete; 100%
Partition Coefficient: n-octanol in water:	No data available.
VOC % by weight:	0.00
Molecular Weight:	58.08

10. STABILITY AND REACTIVITY

Stability:	Stable under normal conditions.
Conditions to Avoid:	No data available.
Materials to Avoid / Chemical Incompatibility:	Strong oxidizing agents Strong acids
Hazardous Decomposition Products:	Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry:	Inhalation, Skin Contact, Eye Contact, Ingestion
Target Organs Potentially Affected By Exposure:	Eyes, Central nervous system stimulation, Respiratory Tract, Skin
Chemical Interactions That Change Toxicity:	None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation:	Can cause minor respiratory irritation, dizziness, weakness, fatigue, nausea, and headache.
Skin Contact:	Can cause minor skin irritation, defatting, and dermatitis.
Eye Contact:	Can cause minor irritation, tearing and reddening.
Ingestion Irritation:	May be harmful if swallowed.
Ingestion Toxicity:	Harmful if swallowed. May cause systemic poisoning.

Long-Term (Chronic) Health Effects:

Carcinogenicity:	Contains a probable or known human carcinogen.
Reproductive and Developmental Toxicity:	No data available to indicate product or any components present at greater than 0.1% may cause birth defects.
Inhalation:	Upon prolonged and/or repeated exposure, can cause minor respiratory irritation, dizziness, weakness, fatigue, nausea, and headache.
Skin Contact:	Upon prolonged or repeated contact, can cause minor

skin irritation, defatting, and dermatitis.

Component Toxicological Data:

NIOSH:

Chemical Name	CAS No.	LD50/LC50
Acetone	67-64-1	Inhalation LC50 Rat 50100 mg/m3 8 h

Component Carcinogenic Data:

OSHA:

Chemical Name	CAS No.	
Benzo(b)fluoranthene	205-99-2	Present

ACGIH:

Chemical Name	CAS No.	
Acetone	67-64-1	A4 - Not Classifiable as a Human Carcinogen
Benzo[b]fluoranthene	205-99-2	A2 - Suspected Human Carcinogen

NIOSH:

Chemical Name	CAS No.
No data available.	

NTP:

Chemical Name	CAS No.
No data available.	

IARC:

Chemical Name	CAS No.	Group No.
No data.		Group 1
No data.		Group 2A
Benzo(b)fluoranthene	205-99-2	Group 2B

12. ECOLOGICAL INFORMATION

Overview:	This material is not expected to be harmful to the ecology.
Mobility:	No data
Persistence:	No data
Bioaccumulation:	No data
Degradability:	No data
Ecological Toxicity Data:	No data available.

13. DISPOSAL CONSIDERATIONS

Waste Description of Spent Product:	Spent or discarded material is a hazardous waste.
Disposal Methods:	Dispose of by incineration following Federal, State, Local, or Provincial regulations.
Waste Disposal of Packaging:	Comply with all Local, State, Federal, and Provincial Environmental Regulations.

14. TRANSPORTATION INFORMATION

United States:	
DOT Proper Shipping Name:	Acetone
UN Number:	UN1090
Hazard Class:	3
Packing Group:	II

International:	
IATA Proper Shipping Name:	Acetone
UN Number:	UN1090
Hazard Class:	3
Packing Group:	II

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available.			

15. REGULATORY INFORMATION

United States:

Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
Acetone	67-64-1	X	-	-	X
benzo (b) fluoranthene	205-99-2	X	X	-	-

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS #	Regulation
Benzo[b]fluoranthene	205-99-2	Prop 65 Cancer

State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
Acetone	67-64-1	X	X	X	X
benzo (b) fluoranthene	205-99-2	X	X	X	X

16. OTHER INFORMATION

Prior Version Date: 05/16/14**Disclaimer:**

Restek Corporation provides the descriptions, data and information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given and accepted at your risk.



SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Benzo[ghi]perylene
Cat No. : AC105550000; AC105550050; AC105550250; AC105551000
Synonyms 1,12-Benzoperylene
Recommended Use Laboratory chemicals.
Uses advised against No Information available
Details of the supplier of the safety data sheet

Company Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100	Entity / Business Name Acros Organics One Reagent Lane Fair Lawn, NJ 07410	Emergency Telephone Number For information US call: 001-800-ACROS-01 / Europe call: +32 14 57 52 11 Emergency Number US :001-201-796-7100 / Europe : +32 14 57 52 99 CHEMTREC Tel. No. US :001-800-424-9300 / Europe :001-703-527-3887
---	--	--

2. Hazard(s) identification

Classification
Classification under 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Label Elements
None required

Hazards not otherwise classified (HNOC)
Very toxic to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Benzo(ghi)perylene	191-24-2	> 98

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes. Obtain medical attention.

Inhalation Remove from exposure, lie down. Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. Obtain medical attention.

Ingestion Clean mouth with water. Get medical attention.

Most important symptoms/effects No information available.

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media No information available

Flash Point No information available

Method - No information available

Autoignition Temperature No information available

Explosion Limits

Upper No data available

Lower No data available

Sensitivity to Mechanical Impact No information available

Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO₂)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
0

Flammability
0

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment.

Environmental Precautions See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up Avoid dust formation. Sweep up or vacuum up spillage and collect in suitable container for disposal. Do not let this chemical enter the environment.

7. Handling and storage

Handling Avoid contact with skin and eyes. Do not breathe dust. Do not breathe vapors or spray mist.

Storage Keep in a dry, cool and well-ventilated place. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
Skin and body protection	Wear appropriate protective gloves and clothing to prevent skin exposure.
Respiratory Protection	Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.
Hygiene Measures	Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Solid
Appearance	Yellow
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	276 - 280 °C / 528.8 - 536 °F
Boiling Point/Range	No information available > @ 760 mmHg
Flash Point	No information available
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	No information available
Vapor Density	No information available
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C22 H12
Molecular Weight	276.33

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable.
Conditions to Avoid	Excess heat. Exposure to light. Incompatible products.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information	No acute toxicity information is available for this product
Component Information	
Toxicologically Synergistic	No information available

Products**Delayed and immediate effects as well as chronic effects from short and long-term exposure**

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Benzo(ghi)perylene	191-24-2	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility

Component	log Pow
Benzo(ghi)perylene	7.23

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT Not regulated

TDG Not regulated

IATA Not regulated

IMDG/IMO Not regulated

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL

Benzo(ghi)perylene	-	-	-	205-883-8	-	-	-	-	-	-
--------------------	---	---	---	-----------	---	---	---	---	---	---

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Benzo(ghi)perylene	191-24-2	> 98	1.0

SARA 311/312 Hazardous Categorization

Acute Health Hazard	No
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Benzo(ghi)perylene	-	-	X	X

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Benzo(ghi)perylene	5000 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Benzo(ghi)perylene	X	X	X	X	-

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class Non-controlled

16. Other information

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Revision Date 10-Feb-2015

Print Date 10-Feb-2015

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

SAFETY DATA SHEET

Version 3.8
Revision Date 10/12/2015
Print Date 01/29/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Carbazole

Product Number : C5132
Brand : Sigma

CAS-No. : 86-74-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 2), H351
Chronic aquatic toxicity (Category 4), H413

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Warning

Hazard statement(s)

H351 : Suspected of causing cancer.
H413 : May cause long lasting harmful effects to aquatic life.

Precautionary statement(s)

P201 : Obtain special instructions before use.
P202 : Do not handle until all safety precautions have been read and understood.
P273 : Avoid release to the environment.
P281 : Use personal protective equipment as required.
P308 + P313 : IF exposed or concerned: Get medical advice/ attention.
P405 : Store locked up.
P501 : Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : C₁₂H₉N
Molecular weight : 167.21 g/mol
CAS-No. : 86-74-8
EC-No. : 201-696-0

Hazardous components

Component	Classification	Concentration
Carbazole		
	Carc. 2; Aquatic Chronic 4; H351, H413	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Nitrogen oxides (NO_x)

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: powder
Colour: beige |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 243 - 246 °C (469 - 475 °F) |
| f) Initial boiling point and boiling range | 355 °C (671 °F) |
| g) Flash point | 220.0 °C (428.0 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | The product is not flammable. |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 533 hPa (400 mmHg) at 323 °C (613 °F) |
| l) Vapour density | No data available |
| m) Relative density | 1.1 g/cm ³ at 18 °C (64 °F) |
| n) Water solubility | 0.00091 g/l at 25 °C (77 °F) |
| o) Partition coefficient: n-octanol/water | log Pow: 3.72 at 22 °C (72 °F) |
| p) Auto-ignition temperature | > 600 °C (> 1,112 °F) at 1,013 hPa (760 mmHg) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD0 Oral - Rat - > 16,000 mg/kg
(OECD Test Guideline 401)

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation
(OECD Test Guideline 404)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Carcinogenicity - Mouse - male and female - Oral
hepatocellular carcinoma

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Carbazole)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: FE3150000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - > 0.93 mg/l - 96.0 h Remarks: No toxicity at the limit of solubility
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 2.30 - 4.90 mg/l - 48 h Remarks: No toxicity at the limit of solubility
Toxicity to algae	Growth inhibition NOEC - Scenedesmus acuminatus - > 0.4 mg/l - 96 h Remarks: No toxicity at the limit of solubility

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation	Cyprinus carpio (Carp) - 42 d - 0.05 mg/l
	Bioconcentration factor (BCF): 241 Cyprinus carpio (Carp) - 42 d - 0.005 mg/l
	Bioconcentration factor (BCF): 200

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

Not dangerous goods

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
 Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Carbazole)
 Marine pollutant:yes

IATA

UN number: 3077 Class: 9 Packing group: III
 Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Carbazole)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Chronic Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

Carbazole	CAS-No. 86-74-8	Revision Date 2009-07-17
-----------	--------------------	-----------------------------

New Jersey Right To Know Components

Carbazole	CAS-No. 86-74-8	Revision Date 2009-07-17
-----------	--------------------	-----------------------------

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer. Carbazole	CAS-No. 86-74-8	Revision Date 2007-09-28
--	--------------------	-----------------------------

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H351	Suspected of causing cancer.
H413	May cause long lasting harmful effects to aquatic life.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0
Health hazard:	2
Fire Hazard:	1
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.8

Revision Date: 10/12/2015

Print Date: 01/29/2016

SAFETY DATA SHEET

Version 5.6
Revision Date 12/10/2015
Print Date 02/09/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Carbon disulfide

Product Number : 180173
Brand : Sigma-Aldrich
Index-No. : 006-003-00-3

CAS-No. : 75-15-0

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225
Acute toxicity, Inhalation (Category 4), H332
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Reproductive toxicity (Category 2), H361
Specific target organ toxicity - repeated exposure, Inhalation (Category 1), H372
Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.
H315 Causes skin irritation.
H319 Causes serious eye irritation.
H332 Harmful if inhaled.
H361 Suspected of damaging fertility or the unborn child.
H372 Causes damage to organs through prolonged or repeated exposure if inhaled.

H401	Toxic to aquatic life.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: CS ₂
Molecular weight	: 76.14 g/mol
CAS-No.	: 75-15-0
EC-No.	: 200-843-6
Index-No.	: 006-003-00-3

Hazardous components

Component	Classification	Concentration
Carbon disulphide	Flam. Liq. 2; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; Repr. 2; STOT RE 1; Aquatic Acute 2; H225, H315, H319, H332, H361, H372, H401	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Sulphur oxides

Flash back possible over considerable distance., Container explosion may occur under fire conditions., Vapours may form explosive mixture with air., May explode when heated.

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Refrigerate before opening.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Carbon disulphide	75-15-0	TWA	1 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Peripheral Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	1.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Peripheral Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	20.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		CEIL	30.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		Peak	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		TWA	1.000000 ppm 3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	10.000000 ppm 30.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		See Table Z-2		
		TWA	20 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		CEIL	30 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		

		Peak	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Carbon disulphide	75-15-0	2-Thiothiazolidine-4-carboxylic acid (TTCA)	0.5000 mg/g	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid Colour: colourless
b) Odour	Stench.
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -112 °C (-170 °F) - lit.
f) Initial boiling point and boiling range	46 °C (115 °F) - lit.
g) Flash point	-30 °C (-22 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 50 %(V) Lower explosion limit: 1.3 %(V)
k) Vapour pressure	394.956 hPa (296.241 mmHg) at 20 °C (68 °F) 1,342.711 hPa (1,007.116 mmHg) at 55 °C (131 °F)
l) Vapour density	2.63 - (Air = 1.0)
m) Relative density	1.266 g/mL at 25 °C (77 °F)
n) Water solubility	2.9 g/l at 20 °C (68 °F) - OECD Test Guideline 105
o) Partition coefficient: n-octanol/water	log Pow: 2.7 at 25 °C (77 °F)
p) Auto-ignition temperature	97 - 107 °C (207 - 225 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

Surface tension	71.9 mN/m at 19.5 °C (67.1 °F)
Relative vapour density	2.63 - (Air = 1.0)

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Alkali metals, Zinc, Amines, Azides, Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - female - > 2,000 mg/kg
(OECD Test Guideline 423)

LC50 Inhalation - Rat - male and female - 4 h - 10.35 mg/l
(OECD Test Guideline 403)

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

- Mouse

Result: Does not cause skin sensitisation.
(OECD Test Guideline 429)

Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

Ames test

Salmonella typhimurium

Result: negative

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

Suspected human reproductive toxicant

May cause reproductive disorders.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: FF6650000

May cause convulsions.

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Poecilia reticulata (guppy) - 4 mg/l - 96 h (OECD Test Guideline 203)
Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - Daphnia magna (Water flea) - 2.1 mg/l - 48 h (OECD Test Guideline 202)
Toxicity to algae	Growth inhibition EC50 - Chlorella pyrenoidosa - 21 mg/l - 96 h (OECD Test Guideline 201)

12.2 Persistence and degradability

Biodegradability	aerobic - Exposure time 28 d Result: > 80 % - Readily biodegradable (OECD Test Guideline 301D)
------------------	--

12.3 Bioaccumulative potential

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1131 Class: 3 (6.1) Packing group: I
Proper shipping name: Carbon disulfide
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1131 Class: 3 (6.1) Packing group: I EMS-No: F-E, S-D
Proper shipping name: CARBON DISULPHIDE

IATA

UN number: 1131 Class: 3 (6.1)
Proper shipping name: Carbon disulphide
IATA Passenger: Not permitted for transport
IATA Cargo: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components

The following components are subject to reporting levels established by SARA Title III, Section 302:

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2007-07-01

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2007-07-01

California Prop. 65 Components

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-06-17

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.
Repr.	Reproductive toxicity

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.6

Revision Date: 12/10/2015

Print Date: 02/09/2016

MATERIAL SAFETY DATA SHEET

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

MATHESON TRI-GAS, INC.
150 Allen Road Suite 302
Basking Ridge, New Jersey 07920
Information: 1-800-416-2505

Emergency Contact:
CHEMTREC 1-800-424-9300
Calls Originating Outside the US:
703-527-3887 (Collect Calls Accepted)

SUBSTANCE: METHYL BROMIDE

TRADE NAMES/SYNONYMS:

MTG MSDS 59; BROMOMETHANE; MBX; METHYL BROMIDE, LIQUID; METHOGAS; ROTOX; BROMOGAS; CELFUME; DOW FUME; DOWFUME MC-2; METAFUME; EMBAFUME; ISCOBROME; PESTMASTER; PROFUME; ZYTOX; HALON 1001; MONOBROMOMETHANE; RCRA U029; UN 1062; Ch3Br; MAT14300; RTECS PA4900000

CHEMICAL FAMILY: halogenated, aliphatic

CREATION DATE: Jan 24 1989

REVISION DATE: Dec 11 2008

2. COMPOSITION, INFORMATION ON INGREDIENTS

COMPONENT: METHYL BROMIDE
CAS NUMBER: 74-83-9
PERCENTAGE: 100.0

3. HAZARDS IDENTIFICATION

NFPA RATINGS (SCALE 0-4): HEALTH=2 FIRE=1 REACTIVITY=0



EMERGENCY OVERVIEW:

COLOR: colorless

PHYSICAL FORM: volatile liquid, gas

ODOR: sweet odor

MAJOR HEALTH HAZARDS: harmful if inhaled or swallowed, skin irritation, central nervous system depression

PHYSICAL HAZARDS: Containers may rupture or explode if exposed to heat.

POTENTIAL HEALTH EFFECTS:

INHALATION:

SHORT TERM EXPOSURE: nausea, vomiting, stomach pain, chest pain, difficulty breathing, headache, symptoms of drunkenness, hyperactivity or drowsiness, tingling sensation, visual disturbances, bluish skin color, paralysis, convulsions, coma

LONG TERM EXPOSURE: fainting, blurred vision, nerve damage, brain damage

SKIN CONTACT:

SHORT TERM EXPOSURE: irritation (possibly severe), itching

LONG TERM EXPOSURE: burns, blisters

EYE CONTACT:

SHORT TERM EXPOSURE: irritation, eye damage

LONG TERM EXPOSURE: same as effects reported in short term exposure

INGESTION:

SHORT TERM EXPOSURE: same as effects reported in short term inhalation

LONG TERM EXPOSURE: no information on significant adverse effects

4. FIRST AID MEASURES

INHALATION: If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. Get immediate medical attention.

SKIN CONTACT: Wash skin with soap and water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention, if needed. Thoroughly clean and dry contaminated clothing and shoes before reuse.

EYE CONTACT: Flush eyes with plenty of water for at least 15 minutes. Then get immediate medical attention.

INGESTION: If swallowed, drink plenty of water, do NOT induce vomiting. Get immediate medical attention. Induce vomiting only at the instructions of a physician. Do not give anything by mouth to unconscious or convulsive person.

NOTE TO PHYSICIAN: For ingestion, consider gastric lavage.

5. FIRE FIGHTING MEASURES

FIRE AND EXPLOSION HAZARDS: Slight fire hazard. Containers may rupture or explode if exposed to heat.

EXTINGUISHING MEDIA: regular dry chemical, regular foam, water

Large fires: Use regular foam or flood with fine water spray.

FIRE FIGHTING: Move container from fire area if it can be done without risk. Fight large fires from a protected location or safe distance. Stay away from the ends of tanks. Dike for later disposal. Do not scatter

spilled material with high-pressure water streams. Do not attempt to extinguish fire unless flow of material can be stopped first. Use extinguishing agents appropriate for surrounding fire. Flood with fine water spray. Cool containers with water spray until well after the fire is out. Apply water from a protected location or from a safe distance. Avoid inhalation of material or combustion by-products. Stay upwind and keep out of low areas. Consider downwind evacuation if material is leaking.

LOWER FLAMMABLE LIMIT: 10%

UPPER FLAMMABLE LIMIT: 16%

AUTOIGNITION: 999 F (537 C)

6. ACCIDENTAL RELEASE MEASURES

WATER RELEASE:

Subject to California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65). Keep out of water supplies and sewers.

OCCUPATIONAL RELEASE:

Do not touch spilled material. Stop leak if possible without personal risk. Reduce vapors with water spray. Small spills: Absorb with sand or other non-combustible material. Collect spilled material in appropriate container for disposal. Small dry spills: Move containers away from spill to a safe area. Large spills: Dike for later disposal. Keep unnecessary people away, isolate hazard area and deny entry. Ventilate closed spaces before entering. Notify Local Emergency Planning Committee and State Emergency Response Commission for release greater than or equal to RQ (U.S. SARA Section 304). If release occurs in the U.S. and is reportable under CERCLA Section 103, notify the National Response Center at (800)424-8802 (USA) or (202)426-2675 (USA).

7. HANDLING AND STORAGE

STORAGE: Store and handle in accordance with all current regulations and standards. Notify State Emergency Response Commission for storage or use at amounts greater than or equal to the TPQ (U.S. EPA SARA Section 302). SARA Section 303 requires facilities storing a material with a TPQ to participate in local emergency response planning (U.S. EPA 40 CFR 355 Part B). Protect from physical damage. Store in a cool, dry place. Store outside or in a detached building. Store in a well-ventilated area. Keep in the dark. Avoid exposure to low temperatures or freezing. Keep separated from incompatible substances.

HANDLING: Subject to handling regulations: U.S. OSHA 29 CFR 1910.119.

8. EXPOSURE CONTROLS, PERSONAL PROTECTION

EXPOSURE LIMITS:

METHYL BROMIDE:

20 ppm (80 mg/m³) OSHA ceiling (skin)

5 ppm (19 mg/m³) OSHA TWA (skin) (vacated by 58 FR 35338, June 30, 1993)

1 ppm ACGIH TWA (skin)
NIOSH TWA (lowest feasible concentration)

VENTILATION: Provide local exhaust or process enclosure ventilation system. Ensure compliance with applicable exposure limits.

EYE PROTECTION: Wear splash resistant safety goggles with a faceshield. Provide an emergency eye wash fountain and quick drench shower in the immediate work area.

CLOTHING: Protective clothing is not required.

GLOVES: Wear appropriate chemical resistant gloves.

RESPIRATOR: The following respirators and maximum use concentrations are drawn from NIOSH and/or OSHA.

At any detectable concentration -

Any self-contained breathing apparatus that has a full facepiece and is operated in a pressure-demand or other positive-pressure mode.

Any supplied-air respirator with a full facepiece that is operated in a pressure-demand or other positive-pressure mode in combination with an auxiliary self-contained breathing apparatus operated in pressure-demand or other positive-pressure mode.

Escape -

Any air-purifying full-facepiece respirator (gas mask) with a chin-style, front-mounted or back-mounted organic vapor canister.

Any appropriate escape-type, self-contained breathing apparatus.

For Unknown Concentrations or Immediately Dangerous to Life or Health -

Any supplied-air respirator with a full facepiece that is operated in a pressure-demand or other positive-pressure mode in combination with an auxiliary self-contained breathing apparatus operated in pressure-demand or other positive-pressure mode.

Any self-contained breathing apparatus that has a full facepiece and is operated in a pressure-demand or other positive-pressure mode.

9. PHYSICAL AND CHEMICAL PROPERTIES

PHYSICAL STATE: gas

APPEARANCE: clear

COLOR: colorless

PHYSICAL FORM: volatile liquid, gas

ODOR: sweet odor

TASTE: burning taste

MOLECULAR WEIGHT: 95

MOLECULAR FORMULA: C-H3-Br

BOILING POINT: 39 F (4 C)

FREEZING POINT: -135 F (-93 C)

VAPOR PRESSURE: 1250 mmHg @ 20 C

VAPOR DENSITY (air=1): 3.3

SPECIFIC GRAVITY (water=1): 1.7 @ 0 C

WATER SOLUBILITY: 1.75% @ 20 C

PH: Not applicable

VOLATILITY: Not applicable

ODOR THRESHOLD: Not available

EVAPORATION RATE: Not applicable

COEFFICIENT OF WATER/OIL DISTRIBUTION: Not applicable

SOLVENT SOLUBILITY:

Soluble: alcohol, chloroform, ether, benzene, carbon disulfide, carbon tetrachloride

10. STABILITY AND REACTIVITY

REACTIVITY: Stable at normal temperatures and pressure.

CONDITIONS TO AVOID: Avoid heat, flames, sparks and other sources of ignition. Containers may rupture or explode if exposed to heat.

INCOMPATIBILITIES: metals, combustible materials, oxidizing materials

HAZARDOUS DECOMPOSITION:

Thermal decomposition products: oxides of carbon, acid halides, halides

POLYMERIZATION: Will not polymerize.

11. TOXICOLOGICAL INFORMATION

METHYL BROMIDE:

TOXICITY DATA: 302 ppm/8 hour(s) inhalation-rat LC50; 214 mg/kg oral-rat LD50

CARCINOGEN STATUS: IARC: Human Inadequate Evidence, Animal Limited Evidence, Group 3;

ACGIH: A4 -Not Classifiable as a Human Carcinogen

LOCAL EFFECTS:

Irritant: skin

ACUTE TOXICITY LEVEL:

Toxic: inhalation, ingestion

TARGET ORGANS: central nervous system

TUMORIGENIC DATA: Available.

MUTAGENIC DATA: Available.

REPRODUCTIVE EFFECTS DATA: Available.

ADDITIONAL DATA: Stimulants such as epinephrine may induce ventricular fibrillation.

12. ECOLOGICAL INFORMATION

ECOTOXICITY DATA:

FISH TOXICITY: 700 ug/L 96 hour(s) LC50 (Mortality) Medaka, high-eyes (*Oryzias latipes*)

INVERTEBRATE TOXICITY: 1700 ug/L 48 hour(s) EC50 (Behavior) Water flea (*Daphnia magna*)

ALGAL TOXICITY: 3200 ug/L 48 hour(s) EC50 (Growth) Green algae (*Scenedesmus quadricauda*)

ENVIRONMENTAL SUMMARY: Highly toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

Dispose in accordance with all applicable regulations. Subject to disposal regulations: U.S. EPA 40 CFR 262. Hazardous Waste Number(s): U029.

14. TRANSPORT INFORMATION

U.S. DOT 49 CFR 172.101:

PROPER SHIPPING NAME: Methyl bromide

ID NUMBER: UN1062

HAZARD CLASS OR DIVISION: 2.3

LABELING REQUIREMENTS: 2.3

QUANTITY LIMITATIONS:

PASSENGER AIRCRAFT OR RAILCAR: Forbidden

CARGO AIRCRAFT ONLY: Forbidden

ADDITIONAL SHIPPING DESCRIPTION: Toxic-Inhalation Hazard Zone C



CANADIAN TRANSPORTATION OF DANGEROUS GOODS:

SHIPPING NAME: Methyl bromide

UN NUMBER: UN1062

CLASS: 2.3

15. REGULATORY INFORMATION

U.S. REGULATIONS:

CERCLA SECTIONS 102a/103 HAZARDOUS SUBSTANCES (40 CFR 302.4):

METHYL BROMIDE: 1000 LBS RQ

SARA TITLE III SECTION 302 EXTREMELY HAZARDOUS SUBSTANCES (40 CFR 355 Subpart B):

METHYL BROMIDE: 1000 LBS TPQ

SARA TITLE III SECTION 304 EXTREMELY HAZARDOUS SUBSTANCES (40 CFR 355 Subpart C):

METHYL BROMIDE: 1000 LBS RQ

SARA TITLE III SARA SECTIONS 311/312 HAZARDOUS CATEGORIES (40 CFR 370 Subparts B and C):

ACUTE: Yes

CHRONIC: No

FIRE: No

REACTIVE: No

SUDDEN RELEASE: Yes

**SARA TITLE III SECTION 313 (40 CFR 372.65):
METHYL BROMIDE**

**OSHA PROCESS SAFETY (29 CFR 1910.119):
METHYL BROMIDE: 2500 LBS TQ**

STATE REGULATIONS:

California Proposition 65:

Known to the state of California to cause the following:

METHYL BROMIDE

Developmental toxicity (Jan 01, 1993)

CANADIAN REGULATIONS:

WHMIS CLASSIFICATION: AD1

NATIONAL INVENTORY STATUS:

U.S. INVENTORY (TSCA): Listed on inventory.

TSCA 12(b) EXPORT NOTIFICATION: Not listed.

CANADA INVENTORY (DSL/NDSL): Not determined.

16. OTHER INFORMATION

“RTECS®” is a United States trademark owned and licensed under authority of the U.S. Government, by and through Symyx Software, Inc. Portions ©Copyright 2001, U.S. Government. All rights reserved.

©Copyright 1984-2009 ChemADVISOR, Inc. All rights reserved.

MATHESON TRI-GAS, INC. MAKES NO EXPRESS OR IMPLIED WARRANTIES, GUARANTEES OR REPRESENTATIONS REGARDING THE PRODUCT OR THE INFORMATION HEREIN, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR USE. MATHESON TRI-GAS, INC. SHALL NOT BE LIABLE FOR ANY PERSONAL INJURY, PROPERTY OR OTHER DAMAGES OF ANY NATURE, WHETHER COMPENSATORY, CONSEQUENTIAL, EXEMPLARY, OR OTHERWISE,



**MATHESON
TRI•GAS**

ask. . .The Gas Professionals™

Page 8 of 8

**RESULTING FROM ANY PUBLICATION, USE OR RELIANCE UPON THE INFORMATION
HEREIN.**

SAFETY DATA SHEET

Version 5.4
Revision Date 12/01/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : 1,2-Dichloroethylene, mixture of *cis* and *trans*

Product Number : D62403
Brand : Aldrich
Index-No. : 602-026-00-3

CAS-No. : 540-59-0

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225
Acute toxicity, Oral (Category 4), H302
Acute toxicity, Inhalation (Category 4), H332
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H302 + H332

Harmful if swallowed or if inhaled

H412

Harmful to aquatic life with long lasting effects.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312	IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P312	Call a POISON CENTER or doctor/ physician if you feel unwell.
P330	Rinse mouth.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	C ₂ H ₂ Cl ₂
Molecular weight	:	96.94 g/mol
CAS-No.	:	540-59-0
EC-No.	:	208-750-2
Index-No.	:	602-026-00-3

Hazardous components

Component	Classification	Concentration
1,2-Dichloroethylene		
	Flam. Liq. 2; Acute Tox. 4; Aquatic Acute 3; Aquatic Chronic 3; H225, H302 + H332, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Air, light, and moisture sensitive.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,2-Dichloroethylene	540-59-0	TWA	200.000000 ppm 790.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	200.000000 ppm 790.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	The value in mg/m3 is approximate.		
		TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Eye irritation		
		TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Eye irritation		
		TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Eye irritation		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- a) Appearance Form: liquid
 Colour: colourless

b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -57 °C (-71 °F) - lit.
f) Initial boiling point and boiling range	48 - 60 °C (118 - 140 °F) - lit.
g) Flash point	6 °C (43 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	1.265 g/cm ³ at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

10.5 Incompatible materials

Strong oxidizing agents
Oxidizing agents, Bases

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 770 mg/kg

Dermal: No data available

No data available

Skin corrosion/irritation

Skin - Rabbit

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: KV9360000

prolonged or repeated exposure can cause:, narcosis, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Lepomis macrochirus (Bluegill) - 140.0 mg/l - 96.0 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Harmful to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1150 Class: 3 Packing group: II
Proper shipping name: 1,2-Dichloroethylene

Poison Inhalation Hazard: No

IMDG

UN number: 1150 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: 1,2-DICHLOROETHYLENE

IATA

UN number: 1150 Class: 3 Packing group: II
Proper shipping name: 1,2-Dichloroethylene

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,2-Dichloroethylene	540-59-0	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,2-Dichloroethylene	540-59-0	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,2-Dichloroethylene	540-59-0	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,2-Dichloroethylene	540-59-0	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H302	Harmful if swallowed.
H302 + H332	Harmful if swallowed or if inhaled

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	1
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.4

Revision Date: 12/01/2015

Print Date: 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Carbon tetrachloride

Product Number : 319961
Brand : Sigma-Aldrich
Index-No. : 602-008-00-5

CAS-No. : 56-23-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 3), H301
Acute toxicity, Inhalation (Category 3), H331
Acute toxicity, Dermal (Category 3), H311
Skin sensitisation (Sub-category 1B), H317
Carcinogenicity (Category 2), H351
Specific target organ toxicity - repeated exposure, Inhalation (Category 1), Liver, Kidney, H372
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412
Hazardous to the ozone layer (Category 1), H420

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H301 + H311 + H331
H317
H351
H372

Toxic if swallowed, in contact with skin or if inhaled
May cause an allergic skin reaction.
Suspected of causing cancer.
Causes damage to organs (Liver, Kidney) through prolonged or repeated exposure if inhaled.

H412	Harmful to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P272	Contaminated work clothing should not be allowed out of the workplace.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of soap and water. Call a POISON CENTER or doctor/ physician if you feel unwell.
P304 + P340 + P311	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.
P502	Refer to manufacturer/ supplier for information on recovery/ recycling.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS
Rapidly absorbed through skin.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	Tetrachloromethane
Formula	:	CCl ₄ CCl ₄
Molecular weight	:	153.82 g/mol
CAS-No.	:	56-23-5
EC-No.	:	200-262-8
Index-No.	:	602-008-00-5

Hazardous components

Component	Classification	Concentration
Tetrachloromethane	Acute Tox. 3; Skin Sens. 1B; Carc. 2; STOT RE 1; Aquatic Acute 3; Aquatic Chronic 3; Ozone 1; H301 + H311 + H331, H317, H351, H372, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Move out of dangerous area. Consult a physician. Show this safety data sheet to the doctor in attendance.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Tetrachloromethane	56-23-5	TWA	5.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Liver damage Suspected human carcinogen Danger of cutaneous absorption		
		STEL	10.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Liver damage Suspected human carcinogen Danger of cutaneous absorption		
		ST	2.000000 ppm 12.600000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		TWA	10.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.17-1967		
		CEIL	25.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.17-1967		
		Peak	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.17-1967		
		See Table Z-2		
		TWA	5 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Liver damage Suspected human carcinogen Danger of cutaneous absorption		
		STEL	10 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Liver damage Suspected human carcinogen Danger of cutaneous absorption		
		ST	2 ppm 12.6 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		See Table Z-2		
		TWA	10 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.17-1967		
		CEIL	25 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.17-1967		
		Peak	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.17-1967		
		TWA	2 ppm 12.6 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 240 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|--|
| a) Appearance | Form: liquid
Colour: colourless |
| b) Odour | sweet |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -23 °C (-9 °F) - lit. |
| f) Initial boiling point and boiling range | 76 - 77 °C (169 - 171 °F) - lit. |
| g) Flash point | does not flash |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower | No data available |

flammability or
explosive limits

- | | |
|---|---|
| k) Vapour pressure | 45 hPa (34 mmHg) at 0.3 °C (32.5 °F)
120 hPa (90 mmHg) at 19.8 °C (67.6 °F)
14,549 hPa (10,913 mmHg) at 24 °C (75 °F) |
| l) Vapour density | No data available |
| m) Relative density | 1.594 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | 0.8461 g/l at 20 °C (68 °F) |
| o) Partition coefficient: n-octanol/water | log Pow: 2.83 at 25 °C (77 °F) |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

- | | |
|-----------------|---|
| Surface tension | 26.7 mN/m at 20 °C (68 °F)
19.5 mN/m at 80 °C (176 °F) |
|-----------------|---|

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 2,350 mg/kg

LC50 Inhalation - Rat - 4 h - 8000 ppm

LD50 Dermal - Rabbit - > 20,000 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Mild skin irritation - 24 h
(Draize Test)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation - 24 h
(Draize Test)**Respiratory or skin sensitisation**

- Mouse

Result: The product is a skin sensitiser, sub-category 1B.
(OECD Test Guideline 429)**Germ cell mutagenicity**

No data available

Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification. Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Tetrachloromethane)

NTP: Reasonably anticipated to be a human carcinogen (Tetrachloromethane)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

Inhalation - Causes damage to organs through prolonged or repeated exposure. - Liver, Kidney

Aspiration hazard

No data available

Additional Information

RTECS: FG4900000

Vomiting, Diarrhoea, Abdominal pain, Nausea, Dizziness, Headache, Damage to the eyes., Liver injury may occur., Kidney injury may occur., Exposure to and/or consumption of alcohol may increase toxic effects., Contact with skin can cause:, Pain, Erythema, hyperemia

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish	mortality LC50 - Danio rerio (zebra fish) - 24.3 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - Daphnia magna (Water flea) - 35 mg/l - 48 h (OECD Test Guideline 202)
Toxicity to algae	Growth inhibition EC50 - Algae - 20 mg/l - 72 h (OECD Test Guideline 201)

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potentialBioaccumulation Lepomis macrochirus (Bluegill) - 21 d
- 52.3 µg/l

Bioconcentration factor (BCF): 30

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1846 Class: 6.1 Packing group: II
Proper shipping name: Carbon tetrachloride
Reportable Quantity (RQ): 10 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1846 Class: 6.1 Packing group: II EMS-No: F-A, S-A
Proper shipping name: CARBON TETRACHLORIDE
Marine pollutant: yes

IATA

UN number: 1846 Class: 6.1 Packing group: II
Proper shipping name: Carbon tetrachloride

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Tetrachloromethane	56-23-5	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Tetrachloromethane	56-23-5	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Tetrachloromethane	56-23-5	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Tetrachloromethane	56-23-5	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
	56-23-5	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H301	Toxic if swallowed.
H301 + H311 + H331	Toxic if swallowed, in contact with skin or if inhaled
H311	Toxic in contact with skin.
H317	May cause an allergic skin reaction.
H331	Toxic if inhaled.
H351	Suspected of causing cancer.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.


Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.10

Revision Date: 01/06/2016

Print Date: 03/03/2016



Health	2
Fire	0
Reactivity	0
Personal Protection	H

Material Safety Data Sheet Chloroform MSDS

Section 1: Chemical Product and Company Identification

Product Name: Chloroform

Catalog Codes: SLC1888, SLC5044

CAS#: 67-66-3

RTECS: FS9100000

TSCA: TSCA 8(b) inventory: Chloroform

CI#: Not available.

Synonym: Trichloromethane; Methane, trichlor-

Chemical Name: Chloroform

Chemical Formula: CHCl₃

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Chloroform	67-66-3	100

Toxicological Data on Ingredients: Chloroform: ORAL (LD50): Acute: 695 mg/kg [Rat]. 36 mg/kg [Mouse]. 820 mg/kg [Guinea pig]. DERMAL (LD50): Acute: >20000 mg/kg [Rabbit]. VAPOR (LC50): Acute: 47702 mg/m 4 hours [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects: Hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Potential Chronic Health Effects: CARCINOGENIC EFFECTS: Classified + (Proven.) by NIOSH. Classified A3 (Proven for animal.) by ACGIH, 2B (Possible for human.) by IARC. Classified 2 (Some evidence.) by NTP. MUTAGENIC EFFECTS: Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to kidneys, liver, heart. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact: Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Cold water may be used. WARM water MUST be used. Get medical attention.

Skin Contact: In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact: Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

Serious Inhalation: Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek medical attention.

Ingestion: Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Non-flammable.

Auto-Ignition Temperature: Not applicable.

Flash Points: Not applicable.

Flammable Limits: Not applicable.

Products of Combustion: Not available.

Fire Hazards in Presence of Various Substances: Not applicable.

Explosion Hazards in Presence of Various Substances: Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions: Not applicable.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: May explode if it comes in contact with aluminum powder, lithium, perchlorate, pentoxide, bis(dimethylamino)dimethylstannane, potassium, potassium-sodium alloy, sodium (or sodium hydroxide or sodium methoxide), and methanol

Section 6: Accidental Release Measures

Small Spill: Absorb with an inert material and put the spilled material in an appropriate waste disposal.

Large Spill: Absorb with an inert material and put the spilled material in an appropriate waste disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions: Do not ingest. Do not breathe gas/fumes/ vapor/spray. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as metals, alkalis.

Storage: Keep container tightly closed. Keep container in a cool, well-ventilated area. Sensitive to light. Store in light-resistant containers.

Section 8: Exposure Controls/Personal Protection

Engineering Controls: Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the workstation location.

Personal Protection: Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill: Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits: TWA: 10 (ppm) [Australia] Inhalation TWA: 2 (ppm) from OSHA (PEL) [United States] Inhalation STEL: 9.78 (mg/m³) from NIOSH Inhalation STEL: 2 (ppm) from NIOSH Inhalation TWA: 9.78 (mg/m³) from OSHA (PEL) [United States] Inhalation TWA: 10 (ppm) from ACGIH (TLV) [United States] [1999] Inhalation TWA: 2 (ppm) [United Kingdom (UK)] Inhalation TWA: 9.9 (mg/m³) [United Kingdom (UK)] Inhalation Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Pleasant. Sweetish. Etheric. Non-irritating

Taste: Burning. Sweet.

Molecular Weight: 119.38 g/mole

Color: Colorless. Clear

pH (1% soln/water): Not available.

Boiling Point: 61°C (141.8°F)

Melting Point: -63.5°C (-82.3°F)

Critical Temperature: 263.33°C (506°F)

Specific Gravity: 1.484 (Water = 1)

Vapor Pressure: 21.1 kPa (@ 20°C)

Vapor Density: 4.36 (Air = 1)

Volatility: Not available.

Odor Threshold: 85 ppm

Water/Oil Dist. Coeff.: The product is more soluble in oil; log(oil/water) = 2

Ionicity (in Water): Not available.

Dispersion Properties: Not available.

Solubility: Very slightly soluble in cold water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Incompatible materials, Light

Incompatibility with various substances: Reactive with metals, alkalis.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity: Light Sensitive. Incompatible with triisopropyl phosphine, acetone, disilane, fluorine, strong bases and reactive metals (aluminum, magnesium in powdered form), light.

Special Remarks on Corrosivity: It will attack some forms of plastics, rubber, and coatings.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Eye contact. Inhalation.

Toxicity to Animals: WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 36 mg/kg [Mouse]. Acute dermal toxicity (LD50): >20000 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 47702 mg/m 4 hours [Rat]. 3

Chronic Effects on Humans: CARCINOGENIC EFFECTS: Classified + (Proven.) by NIOSH. Classified A3 (Proven for animal.) by ACGIH, 2B (Possible for human.) by IARC. Classified 2 (Some evidence.) by NTP. MUTAGENIC EFFECTS: Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. May cause damage to the following organs: kidneys, liver, heart.

Other Toxic Effects on Humans: Hazardous in case of skin contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: May affect genetic material (possible mutagen) and cause adverse reproductive effects(embryotoxicity and fetotoxicity) Suspected carcinogen (tumorigenic) and teratogen based on animal data. Human: passes the placental barrier, detected in maternal milk.

Special Remarks on other Toxic Effects on Humans: Acute Potential Health Effects: Skin: Causes skin irritation and may cause chemical burns. Eye: Causes eye irritation, burning pain and reversible injury to corneal epithelium. Inhalation: Causes irritation of the respiratory system (mucous membranes). May affect behavior/Nervous system (CNS depressant, fatigue, dizziness, nervousness, giddiness, euphoria, loss of coordination and judgement, weakness, hallucinations, muscle contraction/spasticity, general anesthetic, spastic paralysis, headache), anorexia (neurological and gastrointestinal symptoms resembling chronic alcoholism), and possibly coma and death. May affect the liver, kidneys and gastrointestinal tract (nausea, vomiting). Ingestion: Causes gastrointestinal tract irritation (nausea, vomiting). May affect the liver, urinary system (kidneys), respiration, behavior/nervous system (symptoms similar to inhalation), and heart. Chronic Potential Health Effects: Inhalation: Prolonged or repeated inhalation may affect the liver (hepatitis, jaundice, hepatocellular necrosis), metabolism (weight loss), respiration (fibrosis, pneumoconiosis), behavior/central nervous system (symptoms similar to acute inhalation), blood, musculoskeletal system, and kidneys. Ingestion: Prolonged or repeated ingestion may affect the liver, kidneys, metabolism (weight loss), endocrine system (spleen), blood (changes in cell count).

Section 12: Ecological Information

Ecotoxicity: Ecotoxicity in water (LC50): 43.8 mg/l 96 hours [Trout].

BOD5 and COD: Not available.

Products of Biodegradation: Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are as toxic as the product itself.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal: Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 6.1: Poisonous material.

Identification: : Chloroform UNNA: UN1888 PG: III

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations: California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Chloroform California prop. 65 (no significant risk level): Chloroform: 0.02 mg/day (value) California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Chloroform New York release reporting list: Chloroform Rhode Island RTK hazardous substances: Chloroform Pennsylvania RTK: Chloroform Massachusetts RTK: Chloroform New Jersey: Chloroform California Director's List of Hazardous Substances (8 CCR 339): Chloroform Tennessee: Chloroform TSCA 8(b) inventory: Chloroform TSCA 8(d) H and S data reporting: Chloroform: effective: 6/1/87; sunset: 6/1/97 SARA 302/304/311/312 extremely hazardous substances: Chloroform SARA 313 toxic chemical notification and release reporting: Chloroform CERCLA: Hazardous substances.: Chloroform: 10 lbs. (4.536 kg)

Other Regulations: OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada): CLASS D-1A: Material causing immediate and serious toxic effects (VERY TOXIC). CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

DSCL (EEC): R20/22- Harmful by inhalation and if swallowed. R38- Irritating to skin. R40- Possible risks of irreversible effects. S36/37- Wear suitable protective clothing and gloves.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 0

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 0

Reactivity: 0

Specific hazard:

Protective Equipment: Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/10/2005 08:16 PM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Based on Directive 2001/58/EC of the Commission of the European Communities

CHRYSENE

1. Identification of the substance/preparation and of the company/undertaking

1.1 Identification of the substance or preparation:

Synonyms: none
CAS No.: 218-01-9 **BCR number:** BCR-269
EC index No.: 601-048-00-0 **NFPA code:** N.D.
EINECS No.: 205-923-4 **Molecular weight:** 228.30
RTECS No.: GC0700000 **Formula:** C18H12

1.2 Use of the substance or the preparation:

Certified reference material for laboratory use only

1.3 Company/undertaking identification:

Institute for Reference Materials and Measurements
Retieseweg
B-2440 Geel
Tel. : +32 14 57 12 11
Fax : +32 14 58 42 73

1.4 Telephone number for emergency:

+32 70 245 245
Antigifcentrum
p/a Militair Hospitaal Koningin Astrid, Bruynstraat, B-1120 Brussel

2. Composition/information on ingredients

Hazardous ingredients	CAS No. EINECS No.	Conc. in %	Hazard symbol	Risks (R-phrases)
chrysene	218-01-9 205-923-4	100	T;N	45-50/53 (1)

(1) For R-phrases in full: see heading 16

3. Hazards identification

- May cause cancer
- Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

4. First aid measures

4.1 Eye contact:

- Consult a doctor/medical service if irritation persists
- Rinse immediately with water

4.2 Skin contact:

- Consult a doctor/medical service if irritation persists
- Wash with water and soap
- Wipe off dry product from skin
- Remove clothing before washing

4.3 After inhalation:

- Consult a doctor/medical service if breathing problems develop
- Remove the victim into fresh air
- Unconscious: maintain adequate airway and respiration

4.4 After ingestion:

- Consult a doctor/medical service if you feel unwell
- Immediately give lots of water to drink
- Never give water to an unconscious person

Printing date : 07-2002
Compiled by : Brandweerinformatiecentrum voor Gevaarlijke Stoffen vzw (BIG)
Technische Schoolstraat 43 A, B-2440 Geel
☎ +32 14 58 45 47 <http://www.big.be> E-mail: info@big.be

1 / 8

MSDS established :
Reference number : BIG\18207GB Revision date : 22-03-2002
Reason for revision : Directive 2001/58/EC Revision number : 001

CHRYSENE

- Do not induce vomiting

CHRYSENE

5. Fire-fighting measures

5.1 Suitable extinguishing media:

- Water spray
- Alcohol foam
- Polymer foam
- ABC powder
- Carbon dioxide

5.2 Unsuitable extinguishing media:

- Solid water jet ineffective as extinguishing medium

5.3 Special exposure hazards:

- Not easily combustible
- Upon combustion CO and CO₂ are formed

5.4 Instructions:

- Take account of toxic firefighting water
- Use firefighting water moderately and contain it

5.5 Special protective equipment for firefighters:

- Heat/fire exposure: compressed air/oxygen apparatus
- Dust cloud production: compressed air/oxygen apparatus

6. Accidental release measures

6.1 Personal protection/precautions: see heading 8.1/8.3/10.3

6.2 Environmental precautions:

- Prevent soil and water pollution
- Substance must not be discharged into the sewer
- Dam up the solid spill

6.3 Methods for cleaning up:

- Stop dust cloud by covering with sand/earth
- Carefully collect the spill/leftovers
- Scoop solid spill into closing containers
- Spill must not return in its original container
- Take collected spill to manufacturer/competent authority
- Clean contaminated surfaces with an excess of water
- Wash clothing and equipment after handling

7. Handling and storage

7.1 Handling:

- Observe strict hygiene
- Avoid prolonged and repeated contact with skin
- Avoid raising dust
- Do not discharge the waste into the drain
- Remove contaminated clothing immediately

7.2 Storage:

- Keep container tightly closed. Store only in a limited quantity. Store in a dry area. Store in a dark area.
- Keep away from: heat sources, ignition sources, oxidizing agents, acids

Storage temperature	: N.D.	°C
Quantity limits	: N.D.	kg
Storage life	: N.D.	
Materials for packaging	:	
- suitable	:no data available	
- to avoid	:no data available	

7.3 Specific uses:

- See information supplied by the manufacturer

CHRYSENE

8. Exposure controls/Personal protection

8.1 Exposure limit values:

TLV-TWA	: not listed
TLV-STEL	: not listed
TLV-Ceiling	: not listed
OES-LTEL	: not listed
OES-STEL	: not listed
MEL-LTEL	: not listed
MEL-STEL	: not listed
MAK	: not listed
TRK	: not listed
MAC-TGG 8 h	: not listed
MAC-TGG 15 min.	: not listed
MAC-Ceiling	: not listed
VME-8 h	: not listed
VLE-15 min.	: not listed
GWBB-8 h	: not listed
GWK-15 min.	: not listed
Momentary value	: not listed
EC	: not listed
EC-STEL	: not listed

Sampling methods:

- Chrysene (Polynuclear aromatic Hydrocarbons)	NIOSH 5515
- Chrysene	OSHA 58
- Chrysene (Polynuclear aromatic Hydrocarbons)	NIOSH 5506

8.2 Exposure controls:

8.2.1 Occupational exposure controls:

- Measure the concentration in the air regularly
- Work under local exhaust/ventilation

8.2.2 Environmental exposure controls: see heading 13

8.3 Personal protection:

8.3.1 respiratory protection:

- Dust production: dust mask with filter type P3
- High dust production: compressed air/oxygen apparatus

8.3.2 hand protection:

- Gloves
Suitable materials: No data available
- Breakthrough time: N.D.

8.3.3 eye protection:

- Safety glasses
- In case of dust production: protective goggles

8.3.4 skin protection:

- Protective clothing
- In case of dust production: head/neck protection
Suitable materials: No data available

CHRYSENE

9. Physical and chemical properties

9.1 General information:

Appearance (at 20°C) : Crystalline solid / Flakes
Odour : Odourless
Colour : White

9.2 Important health, safety and environmental information:

pH value : N.D.
Boiling point/boiling range : 448 °C
Flashpoint : N.D. °C
Explosion limits : N.D. vol% (°C)
Vapour pressure (at 20°C) : N.D. hPa
Vapour pressure (at 50°C) : N.D. hPa
Relative density (at 20°C) : 1.27
Water solubility : < 0.001 g/100 ml
Soluble in : N.D.
Relative vapour density : N.D.
Viscosity : N.D. Pa.s
Partition coefficient n-octanol/water : 5.61/5.73
Evaporation rate :
 ratio to butyl acetate : N.D.
 ratio to ether : N.D.

9.3 Other information:

Melting point/melting range : 256 °C
Auto-ignition point : N.D. °C
Saturation concentration : N.D. g/m³

10. Stability and reactivity

10.1 Conditions to avoid/reactivity:

- Stable under normal conditions

10.2 Materials to avoid:

- Keep away from: heat sources, ignition sources, oxidizing agents, acids

10.3 Hazardous decomposition products:

- Upon combustion CO and CO₂ are formed
- Reacts violently with (strong) oxidizers
- Decomposes on exposure to (strong) acids

11. Toxicological information

11.1 Acute toxicity:

LD50 oral rat : N.D. mg/kg
LD50 dermal rat : N.D. mg/kg
LD50 dermal rabbit : N.D. mg/kg
LC50 inhalation rat : N.D. mg/l/4 h
LC50 inhalation rat : N.D. ppm/4 h

CHRYSENE

11.2 Chronic toxicity:

EC carc. cat. : 2
EC muta. cat. : 3
EC repr. cat. : not listed

Carcinogenicity (TLV) : A3
Carcinogenicity (MAC) : K
Carcinogenicity (VME) : not listed
Carcinogenicity (GWBB) : not listed

Carcinogenicity (MAK) : 2
Mutagenicity (MAK) : not listed
Teratogenicity (MAK) : -

IARC classification : 3

11.3 Routes of exposure: ingestion, inhalation, eyes and skin
Caution! Substance is absorbed through the skin

11.4 Acute effects/symptoms:

AFTER SKIN CONTACT
- Slight irritation

11.5 Chronic effects:

- Probably human carcinogenic
 - No certainty about human mutagenic properties
- ON CONTINUOUS/REPEATED EXPOSURE/CONTACT:
- No specific information available
- SIMILAR PRODUCTS CAUSE FOLLOWING SYMPTOMS:
- Feeling of weakness
 - Photoallergy
 - Cracking of the skin
 - Skin rash/inflammation
 - Skin cancer
 - Lung tissue affection/degeneration
 - Enlargement/affection of the liver
 - Affection of the renal tissue

12. Ecological information

12.1 Ecotoxicity:

- LC50 (24 h) : 0.0007 mg/l (DAPHNIA MAGNA)
- LC50 (24 h) : >6.7 mg/l (RANA SP.)

12.2 Mobility:

- Volatile organic compounds (VOC): N.D.%
- Forming sediments in water
- Adsorbs into the soil
- Insoluble in water

For other physicochemical properties see heading 9.

12.3 Persistence and degradability:

- biodegradation BOD₅ : N.D. % ThOD
- water : - Not readily biodegradable in water
- soil : T $\frac{1}{2}$: > 77 days

12.4 Bioaccumulative potential:

- log P_{ow} : 5.61/5.73
- BCF : 4440 (LAMELLIBRANCHIATA)
- Highly bioaccumulative

12.5 Other adverse effects:

- **WGK** : 3 (Classification based on the R-phrases in compliance with Verwaltungsvorschrift wassergefährdender Stoffe (VwVwS) of 17 May 1999)
- **Effect on the ozone layer** : Not dangerous for the ozone layer (Council Regulation (EC) 3093/94)
- **Greenhouse effect** : no data available
- **Effect on waste water purification** : no data available

13. Disposal considerations

13.1 Provisions relating to waste:

- Waste material code (91/689/EEC, Council Decision 2001/118/EC, O.J. L47 of 16/2/2001): 16 05 06 (laboratory chemicals, consisting of or containing dangerous substances, including mixtures of laboratory)
- Waste material code (Flanders): 001, 045, 691
- Waste code (Germany): 59302
- Hazardous waste (91/689/EEC)


13.2 Disposal methods:

- Dissolve or mix with a combustible solvent
- Remove to an authorized incinerator equipped with an afterburner and a flue gas scrubber
- Do not discharge into surface water (2000/60/EEC, Council)

13.3 Packaging/Container:

- Waste material code packaging (91/689/EEC, Council Decision 2001/118/EC, O.J. L47 of 16/2/2001): 15 01 10 (packaging containing residues of or contaminated by dangerous substances)

14. Transport information



- 14.1 Classification of the substance in compliance with UN Recommendations
- | | |
|----------------------|--|
| UN number | : 3077 |
| CLASS | : 9 |
| SUB RISKS | : - |
| PACKING | : III |
| PROPER SHIPPING NAME | : UN 3077, Environmentally hazardous substance, solid, n.o.s. (chrysene) |
- 14.2 ADR (transport by road)
- | | |
|-----------------------|-------|
| CLASS | : 9 |
| PACKING | : III |
| DANGER LABEL TANKS | : 9 |
| DANGER LABEL PACKAGES | : 9 |
- 14.3 RID (transport by rail)
- | | |
|-----------------------|-------|
| CLASS | : 9 |
| PACKING | : III |
| DANGER LABEL TANKS | : 9 |
| DANGER LABEL PACKAGES | : 9 |
- 14.4 ADNR (transport by inland waterways)
- | | |
|-----------------------|-------|
| CLASS | : 9 |
| PACKING | : III |
| DANGER LABEL TANKS | : 9 |
| DANGER LABEL PACKAGES | : 9 |
- 14.5 IMDG (maritime transport)
- | | |
|------------------|-------|
| CLASS | : 9 |
| SUB RISKS | : - |
| PACKING | : III |
| MFAG | : - |
| EMS | : - |
| MARINE POLLUTANT | : P |
- 14.6 ICAO (air transport)
- | | |
|---|-------|
| CLASS | : 9 |
| SUB RISKS | : - |
| PACKING | : III |
| PACKING INSTRUCTIONS PASSENGER AIRCRAFT | : |
| PACKING INSTRUCTIONS CARGO AIRCRAFT | : |
- 14.7 Special precautions in connection with transport : none
- 14.8 Limited quantities (LQ) :

When substances and their packaging meet the conditions established by ADR/RID/ADNR in chapter 3.4, **only** the following prescriptions shall be complied with:

each package shall display a diamond-shaped figure with the following inscription:

- 'UN 3077'

or, in the case of different goods with different identification numbers within a single package:

- the letters 'LQ'

CHRYSENE

15. Regulatory information

Enumerated in substance list Annex I of directive 67/548/EEC et sequens



Toxic



Dangerous for the environment

- R45 : May cause cancer
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment
- S53 : Avoid exposure - obtain special instructions before use
S45 : In case of accident or if you feel unwell, seek medical advice (show the label where possible)
S60 : This material and/or its container must be disposed of as hazardous waste
S61 : Avoid release to the environment. Refer to special instructions/safety data sheets.

16. Other information

The information provided on this MSDS is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

N.A. = NOT APPLICABLE
N.D. = NOT DETERMINED
***** = INTERNAL CLASSIFICATION

Full text of any R-phrases referred to under heading 2:

- R45 : May cause cancer
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

Exposure limits:

TLV : Threshold Limit Value - ACGIH USA 2000
OES : Occupational Exposure Standards - United Kingdom 1999
MEL : Maximum Exposure Limits - United Kingdom 1999
MAK : Maximale Arbeitsplatzkonzentrationen - Germany 2001
TRK : Technische Richtkonzentrationen - Germany 2001
MAC : Maximale aanvaarde concentratie - The Netherlands 2002
VME : Valeurs limites de Moyenne d'Exposition - France 1999
VLE : Valeurs limites d'Exposition à court terme - France 1999
GWBB : Grenswaarde beroepsmatige blootstelling - Belgium 1998
GWK : Grenswaarde kortstondige blootstelling - Belgium 1998
EC : Indicative occupational exposure limit values - directive 2000/39/EC

Chronic toxicity:

K : List of the carcinogenic substances and processes - The Netherlands 2002

SAFETY DATA SHEET

Version 4.6
Revision Date 01/26/2016
Print Date 04/01/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : α -Chlordane
Product Number : 442449
Brand : Supelco

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA
Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302
Acute toxicity, Inhalation (Category 4), H332
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H302 + H332

Harmful if swallowed or if inhaled

H315

Causes skin irritation.

H319

Causes serious eye irritation.

H335

May cause respiratory irritation.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P261

Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264

Wash skin thoroughly after handling.

P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Molecular weight	:	208.29 g/mol
EC-No.	:	225-825-5

Hazardous components

Component	Classification	Concentration
Chlordane	Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; STOT SE 3; Aquatic Acute 1; Aquatic Chronic 1; H302 + H332, H315, H319, H335, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: crystalline
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | 93.0 - 94.0 °C (199.4 - 201.2 °F) |
| f) Initial boiling point and boiling range | No data available |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | No data available |

- | | |
|---|-------------------|
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 500 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Chlordane)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Lepomis macrochirus (Bluegill) - 0.0074 mg/l - 96 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Lepomis macrochirus (Bluegill) - 24 h
- 0.005 mg/l

Bioconcentration factor (BCF): 322

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Chlordane)
Reportable Quantity (RQ): 1 lbs
Marine pollutant: yes
Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
 Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Chlordane)
 Marine pollutant:yes

IATA

UN number: 3077 Class: 9 Packing group: III
 Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Chlordane)

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Chlordane	5103-71-9	

New Jersey Right To Know Components

	CAS-No.	Revision Date
Chlordane	5103-71-9	

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Irrit.	Eye irritation
H302	Harmful if swallowed.
H302 + H332	Harmful if swallowed or if inhaled
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 01/26/2016

Print Date: 04/01/2016

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
1/15

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifier

Product name: Methyl chloride (R40)
Trade name: Methyl Chloride Grade N3.0

Additional identification

Chemical name: chloromethane; methyl chloride
Chemical formula: CH₃Cl
INDEX No. 602-001-00-7
CAS-No. 74-87-3
EC No. 200-817-4
REACH Registration No. 01-2119493708-22

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses: Industrial and professional. Perform risk assessment prior to use.
Degreasing. Using gas alone or in mixtures for the calibration of analysis equipment. Using gas as feedstock in chemical processes. Formulation of mixtures with gas in pressure receptacles.
Uses advised against Consumer use.

1.3 Details of the supplier of the safety data sheet

Supplier
BOC
Priestley Road, Worsley
M28 2UT Manchester
Telephone: 0800 111 333
E-Mail: ReachSDS@boc.com

1.4 Emergency telephone number: 0800 111 333

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

Classification according to Directive 67/548/EEC or 1999/45/EC as amended

F+; R12 Carc. 3; R40 Xn; R48/20

The full text for all R-phrases is displayed in section 16.

Classification according to Regulation (EC) No 1272/2008 as amended

Physical hazards

Flammable gas	Category 1	H220: Extremely flammable gas.
Gases under pressure	Liquefied gas	H280: Contains gas under pressure; may explode if heated.

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
2/15

Health hazards

Carcinogenicity	Category 2	H351: Suspected of causing cancer.
Toxic to reproduction	Category 2	H361: Suspected of damaging fertility or the unborn child.
Specific target organ toxicity - repeated exposure	Category 2	H373: May cause damage to organs through prolonged or repeated exposure.

2.2 Label elements

Contains: chloromethane; methyl chloride



Signal words: Danger

Hazard Statement(s):
H220: Extremely flammable gas.
H280: Contains gas under pressure; may explode if heated.
H351: Suspected of causing cancer.
H361: Suspected of damaging fertility or the unborn child.
H373: May cause damage to organs through prolonged or repeated exposure.

Precautionary statement

Prevention:
P202: Do not handle until all safety precautions have been read and understood.
P210: Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P260: Do not breathe gas/vapours.
P280: Wear protective gloves/protective clothing/eye protection/face protection.

Response:
P308+P313: IF exposed or concerned: Get medical advice/attention.
P377: Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
P381: Eliminate all ignition sources if safe to do so.

Storage: P403: Store in a well-ventilated place.

Disposal: None.

2.3 Other hazards: Contact with evaporating liquid may cause frostbite or freezing of skin.

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
3/15

SECTION 3: Composition/information on ingredients

3.1 Substances

Chemical name	chloromethane; methyl chloride
INDEX No.:	602-001-00-7
CAS-No.:	74-87-3
EC No.:	200-817-4
REACH Registration No.:	01-2119493708-22
Purity:	100%
	The purity of the substance in this section is used for classification only, and does not represent the actual purity of the substance as supplied, for which other documentation should be consulted.
Trade name:	Methyl Chloride Grade N3.0

SECTION 4: First Aid Measures

General: In high concentrations may cause asphyxiation. Symptoms may include loss of mobility/consciousness. Victim may not be aware of asphyxiation. Remove victim to uncontaminated area wearing self contained breathing apparatus. Keep victim warm and rested. Call a doctor. Apply artificial respiration if breathing stopped.

4.1 Description of first aid measures

Inhalation: In high concentrations may cause asphyxiation. Symptoms may include loss of mobility/consciousness. Victim may not be aware of asphyxiation. Remove victim to uncontaminated area wearing self contained breathing apparatus. Keep victim warm and rested. Call a doctor. Apply artificial respiration if breathing stopped.

Eye contact: Rinse the eye with water immediately. Remove contact lenses, if present and easy to do. Continue rinsing. Flush thoroughly with water for at least 15 minutes. Get immediate medical assistance. If medical assistance is not immediately available, flush an additional 15 minutes.

Skin contact: Contact with evaporating liquid may cause frostbite or freezing of skin.

Ingestion: Ingestion is not considered a potential route of exposure.

4.2 Most important symptoms and effects, both acute and delayed: Respiratory arrest Contact with liquefied gas can cause damage (frostbite) due to rapid evaporative cooling. May cause damaging effects to central nervous system, metabolism and gastrointestinal tract.

4.3 Indication of any immediate medical attention and special treatment needed

Hazards: Respiratory arrest Contact with liquefied gas can cause damage (frostbite) due to rapid evaporative cooling.

Treatment: Thaw frosted parts with lukewarm water. Do not rub affected area. Get immediate medical advice/attention.

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
4/15

SECTION 5: Firefighting Measures

General fire hazards: Heat may cause the containers to explode.

5.1 Extinguishing media

Suitable extinguishing media: Water Spray or Fog Dry powder. Foam.

Unsuitable extinguishing media: Carbon dioxide.

5.2 Special hazards arising from the substance or mixture: No data available.

Hazardous Combustion Products: If involved in a fire the following toxic and/or corrosive fumes may be produced by thermal decomposition: phosgene; Hydrogen chloride; carbon monoxide

5.3 Advice for firefighters

Special fire fighting procedures: In case of fire: Stop leak if safe to do so. Do not extinguish flames at leak because possibility of uncontrolled explosive re-ignition exists. Continue water spray from protected position until container stays cool. Use extinguishants to contain the fire. Isolate the source of the fire or let it burn out.

Special protective equipment for firefighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA. Guideline: EN 469 Protective clothing for firefighters. Performance requirements for protective clothing for firefighting. EN 15090 Footwear for firefighters. EN 659 Protective gloves for firefighters. EN 443 Helmets for fire fighting in buildings and other structures. EN 137 Respiratory protective devices — Self-contained open-circuit compressed air breathing apparatus with full face mask — Requirements, testing, marking.

SECTION 6: Accidental Release Measures

6.1 Personal precautions, protective equipment and emergency procedures: Evacuate area. Provide adequate ventilation. Consider the risk of potentially explosive atmospheres. Eliminate all ignition sources if safe to do so. Monitor the concentration of the released product. Prevent from entering sewers, basements and workpits, or any place where its accumulation can be dangerous. Wear self-contained breathing apparatus when entering area unless atmosphere is proved to be safe. EN 137 Respiratory protective devices — Self-contained open-circuit compressed air breathing apparatus with full face mask — Requirements, testing, marking.

6.2 Environmental precautions: Prevent further leakage or spillage if safe to do so.

6.3 Methods and material for containment and cleaning up: Provide adequate ventilation. Eliminate sources of ignition.

6.4 Reference to other sections: Refer to sections 8 and 13.

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
5/15

SECTION 7: Handling and Storage:

- 7.1 Precautions for safe handling:** Only experienced and properly instructed persons should handle gases under pressure. Use only properly specified equipment which is suitable for this product, its supply pressure and temperature. Purge system with dry inert gas (e.g. helium or nitrogen) before gas is introduced and when system is placed out of service. Purge air from system before introducing gas. Containers, which contain or have contained flammable or explosive substances, must not be inerted with liquid carbon dioxide. Assess the risk of a potentially explosive atmosphere and the need for suitable equipment i.e. explosion-proof. Take precautionary measures against static discharges. Keep away from ignition sources (including static discharges). Provide electrical earthing of equipment and electrical equipment usable in explosive atmospheres. Use only non-sparking tools. Refer to supplier's handling instructions. The substance must be handled in accordance with good industrial hygiene and safety procedures. Ensure the complete system has been (or is regularly) checked for leaks before use. Protect containers from physical damage; do not drag, roll, slide or drop. Do not remove or deface labels provided by the supplier for the identification of the container contents. When moving containers, even for short distances, use appropriate equipment eg. trolley, hand truck, fork truck etc. Secure cylinders in an upright position at all times, close all valves when not in use. Provide adequate ventilation. Suck back of water into the container must be prevented. Do not allow backfeed into the container. Avoid suckback of water, acid and alkalis. Keep container below 50°C in a well ventilated place. Observe all regulations and local requirements regarding storage of containers. When using do not eat, drink or smoke. Store in accordance with local/regional/national/international regulations. Never use direct flame or electrical heating devices to raise the pressure of a container. Leave valve protection caps in place until the container has been secured against either a wall or bench or placed in a container stand and is ready for use. Damaged valves should be reported immediately to the supplier. Close container valve after each use and when empty, even if still connected to equipment. Never attempt to repair or modify container valves or safety relief devices. Replace valve outlet caps or plugs and container caps where supplied as soon as container is disconnected from equipment. Keep container valve outlets clean and free from contaminants particularly oil and water. If user experiences any difficulty operating container valve discontinue use and contact supplier. Never attempt to transfer gases from one container to another. Container valve guards or caps should be in place.
- 7.2 Conditions for safe storage, including any incompatibilities:** All electrical equipment in the storage areas should be compatible with the risk of a potentially explosive atmosphere. Segregate from oxidant gases and other oxidants being stored. Containers should not be stored in conditions likely to encourage corrosion. Stored containers should be periodically checked for general conditions and leakage. Container valve guards or caps should be in place. Store containers in location free from fire risk and away from sources of heat and ignition. Keep away from combustible material.
- 7.3 Specific end use(s):** None.

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
6/15

SECTION 8: Exposure Controls/Personal Protection

8.1 Control parameters

Occupational Exposure Limits

Chemical name	Type	Exposure Limit Values	Source
chloromethane; methyl chloride	TWA	50 ppm 105 mg/m ³	UK. EH40 Workplace Exposure Limits (WELs) (12 2011)
	STEL	100 ppm 210 mg/m ³	

DNEL-Values

Critical component	Type	Value	Remarks
chloromethane; methyl chloride	Worker - inhalative, long-term - systemic	100 mg/m ³	-

PNEC-Values

Critical component	Type	Value	Remarks
chloromethane; methyl chloride	freshwater	0,2 mg/l	-
	marine water	0,02 mg/l	-
	freshwater - intermittent	2 mg/l	-
	freshwater sediment	0,556 mg/kg dry weight	-
	Soil	0,079 mg/kg dry weight	-

8.2 Exposure controls

Appropriate engineering controls:

Consider a work permit system e.g. for maintenance activities. Ensure adequate air ventilation. Provide adequate general and local exhaust ventilation. Keep concentrations well below lower explosion limits. Gas detectors should be used when quantities of flammable gases or vapours may be released. Systems under pressure should be regularly checked for leakages. Product to be handled in a closed system. Use only permanent leak tight installations (e.g. welded pipes) Take precautionary measures against static discharges.

Individual protection measures, such as personal protective equipment

General information:

A risk assessment should be conducted and documented in each work area to assess the risks related to the use of the product and to select the PPE that matches the relevant risk. The following recommendations should be considered. Keep self contained breathing apparatus readily available for emergency use. Personal protective equipment for the body should be selected based on the task being performed and the risks involved. Refer to local regulations for restriction of emissions to the atmosphere. See section 13 for specific methods for waste gas treatment. Do not eat, drink or smoke when using the product.

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
7/15

Eye/face protection:	Safety eyewear, goggles or face-shield to EN166 should be used to avoid exposure to liquid splashes. Wear eye protection to EN 166 when using gases. Guideline: EN 166 Personal Eye Protection.
Skin protection Hand protection:	Wear working gloves while handling containers Guideline: EN 388 Protective gloves against mechanical risks Break-through time: 8 min Guideline: EN 374-1/2/3 Protective gloves against chemicals and micro-organisms. Chemically resistant gloves complying with EN 374 should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Guideline: EN 374-1/2/3 Protective gloves against chemicals and micro-organisms.
Body protection:	Wear fire/flame resistant/retardant clothing. Guideline: ISO/TR 2801:2007 Clothing for protection against heat and flame -- General recommendations for selection, care and use of protective clothing.
Other:	Wear safety shoes while handling containers Guideline: ISO 20345 Personal protective equipment - Safety footwear.
Respiratory Protection:	Not required. When allowed by a risk assessment Respiratory Protective Equipment (RPE) may be used
Thermal hazards:	No precautionary measures are necessary.
Hygiene measures:	Obtain special instructions before use. Specific risk management measures are not required beyond good industrial hygiene and safety procedures. Do not eat, drink or smoke when using the product.
Environmental exposure controls:	For waste disposal, see section 13.

SECTION 9: Physical And Chemical Properties
--

9.1 Information on basic physical and chemical properties

Appearance

Physical state:	Gas
Form:	Liquefied gas
Colour:	Colourless
Odour:	Faint sweetish odour
Odour Threshold:	Odour threshold is subjective and is inadequate to warn of over exposure.
pH:	No data available.
Melting Point:	-97 °C
Boiling Point:	-23,7 °C
Sublimation Point:	Not applicable.
Critical Temp. (°C):	143,0 °C

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
8/15

Flash Point:	Not applicable to gases and gas mixtures
Evaporation Rate:	Not applicable to gases and gas mixtures
Flammability (solid, gas):	Flammable Gas
Flammability limit - upper (%)-:	17 %(V)
Flammability limit - lower(%)-:	8,1 %(V)
Vapour pressure:	573,28 kPa (25 °C)
Vapour density (air=1):	2,47 AIR=1
Relative density:	No data available.
Solubility(ies)	
Solubility in Water:	5,32 g/l (25 °C)
Partition coefficient (n-octanol/water):	0,91
Autoignition Temperature:	632 °C
Decomposition Temperature:	Not applicable.
Viscosity	
Kinematic viscosity:	No data available.
Dynamic Viscosity:	0,183 mPa.s (20 °C)
Explosive properties:	Not applicable.
Oxidising Properties:	Not applicable.

9.2 Other information:	Gas/vapour heavier than air. May accumulate in confined spaces, particularly at or below ground level.
Molecular weight:	50,49 g/mol (CH ₃ Cl)

SECTION 10: Stability and Reactivity

10.1 Reactivity:	No reactivity hazard other than the effects described in sub-section below.
10.2 Chemical stability:	Stable under normal conditions.
10.3 Possibility of hazardous reactions:	Can form a potentially explosive atmosphere in air. May react violently with oxidants.
10.4 Conditions to avoid:	Avoid moisture in the installation. Keep away from heat/sparks/open flames/hot surfaces. No smoking.
10.5 Incompatible materials:	Air and oxidisers. Moisture. For material compatibility see latest version of ISO-11114.
10.6 Hazardous decomposition products:	Under normal conditions of storage and use, hazardous decomposition products should not be produced.

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
9/15

SECTION 11: Toxicological Information

General information: May cause central nervous system depression. May cause damage to the liver.

11.1 Information on toxicological effects

**Acute Toxicity - Oral
Product**

Based on available data, the classification criteria are not met.

chloromethane; methyl
chloride

LD 50 (Rat): 1.800 mg/kg

**Acute Toxicity - Dermal
Product**

Based on available data, the classification criteria are not met.

**Acute Toxicity - Inhalation
Product**

Harmful if inhaled.

chloromethane; methyl
chloride

LC 50 (Rat, 4 h): 2566,5 ppm

**Skin corrosion/irritation
Product**

Based on available data, the classification criteria are not met.

**Serious eye damage/eye irritation
Product**

Based on available data, the classification criteria are not met.

chloromethane; methyl
chloride

Not irritating

**Respiratory or skin sensitisation
Product**

Based on available data, the classification criteria are not met.

**Germ cell mutagenicity
Product**

Based on available data, the classification criteria are not met.

**Carcinogenicity
Product**

Suspected of causing cancer.

**Reproductive toxicity
Product**

Suspected of damaging fertility or the unborn child.

**Reproductive toxicity (Fertility)
chloromethane; methyl
chloride**

Rat NOAEC: 310 mg/m³

**Specific target organ toxicity - single exposure
Product**

Based on available data, the classification criteria are not met.

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
10/15

Specific target organ toxicity - repeated exposure

Product May cause damage to organs through prolonged or repeated exposure.

chloromethane; methyl chloride
Route of Exposure: Inhalation
Target Organ(s): Liver
Repeated exposure may cause liver damage or failure. Causes damage to the central nervous system.

Aspiration hazard

Product Not applicable to gases and gas mixtures.

SECTION 12: Ecological Information

12.1 Toxicity

Acute toxicity

Product No ecological damage caused by this product.

Acute toxicity - Fish

chloromethane; methyl chloride
LC 50 (Inland silverside (Menidia beryllina), 96 h): 270 mg/l (Static) Mortality
LC 50 (Bluegill (Lepomis macrochirus), 96 h): 550 mg/l (Static) Mortality

12.2 Persistence and degradability

Product Not applicable to gases and gas mixtures.

chloromethane; methyl chloride
The substance is biodegradable. Unlikely to persist.

Photodegradation

chloromethane; methyl chloride
Degradation by OH radicals.
Air

Atmospheric degradation

chloromethane; methyl chloride
Half-life time: 231 day(s)

Stability in water

12.3 Bioaccumulative potential

Product The product is expected to biodegrade and is not expected to persist for long periods in an aquatic environment.

12.4 Mobility in soil

Product Because of its high volatility, the product is unlikely to cause ground or water pollution.

chloromethane; methyl chloride
Henry's Law Constant: 49,46 MPa (24 °C)

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
11/15

**12.5 Results of PBT and vPvB
assessment**

Product Not classified as PBT or vPvB.

12.6 Other adverse effects:

Global Warming Potential

Contains greenhouse gas(es).

chloromethane; methyl
chloride

EIGA Classification and Labelling Guide, Doc 169/11
- Global warming potential: 13

SECTION 13: Disposal Considerations

13.1 Waste treatment methods

General information:

Do not discharge into any place where its accumulation could be dangerous. Consult supplier for specific recommendations. Do not discharge into areas where there is a risk of forming an explosive mixture with air. Waste gas should be flared through a suitable burner with flash back arrestor.

Disposal methods:

Refer to the EIGA code of practice (Doc.30 "Disposal of Gases", downloadable at <http://www.eiga.org>) for more guidance on suitable disposal methods. Dispose of container via gas supplier only. Discharge, treatment, or disposal may be subject to national, state, or local laws.

European Waste Codes

Container:

16 05 04*: gases in pressure containers (including halons) containing dangerous substances

SECTION 14: Transport Information

ADR

14.1 UN number: UN 1063
14.2 UN proper shipping name: METHYL CHLORIDE (REFRIGERANT GAS R 40)
14.3 Transport hazard class(es)
Class: 2
Label(s): 2.1
Hazard No. (ADR): 23
Tunnel restriction code: (B/D)
Emergency Action Code: 2YE
14.4 Packing group: -
14.5 Environmental hazards: Not applicable
14.6 Special precautions for user: -

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
12/15

RID

14.1 UN number: UN 1063
14.2 UN proper shipping name: METHYL CHLORIDE (REFRIGERANT GAS R 40)
14.3 Transport hazard class(es):
Class: 2
Label(s): 2.1
14.4 Packing group: -
14.5 Environmental hazards: Not applicable
14.6 Special precautions for user: -

IMDG

14.1 UN number: UN 1063
14.2 UN proper shipping name: METHYL CHLORIDE (REFRIGERANT GAS R 40)
14.3 Transport hazard class(es):
Class: 2.1
Label(s): 2.1
EmS No.: F-D, S-U
14.3 Packing group: -
14.5 Environmental hazards: Not applicable
14.6 Special precautions for user: -

IATA

14.1 UN number: UN 1063
14.2 Proper Shipping Name: Methyl chloride
14.3 Transport hazard class(es):
Class: 2.1
Label(s): 2.1
14.4 Packing group: -
14.5 Environmental hazards: Not applicable
14.6 Special precautions for user: -
Other information
Passenger and cargo aircraft: Forbidden.
Cargo aircraft only: Allowed.

14.7 Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code: Not applicable.

Additional identification: Avoid transport on vehicles where the load space is not separated from the driver's compartment. Ensure vehicle driver is aware of the potential hazards of the load and knows what to do in the event of an accident or an emergency. Before transporting product containers ensure that they are firmly secured. Ensure that the cylinder valve is closed and not leaking. Container valve guards or caps should be in place. Ensure adequate air ventilation.

SECTION 15: Regulatory information

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture:

EU Regulations

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
13/15

Directive 92/85/EEC: on the safety and health of pregnant workers and workers who have recently given birth or are breast feeding.:

Chemical name	CAS-No.	Concentration
chloromethane; methyl chloride	74-87-3	100%

Directive 96/82/EC (Seveso II): on the control of major accident hazards involving dangerous substances:

Chemical name	CAS-No.	Concentration
chloromethane; methyl chloride	74-87-3	100%

Directive 98/24/EC on the protection of workers from the risks related to chemical agents at work.:

Chemical name	CAS-No.	Concentration
chloromethane; methyl chloride	74-87-3	100%

National Regulations

Dangerous Substances and Explosive Atmospheres Regulations (DSEAR 2002 No. 2776) Management of Health and Safety at Work Regulations (1999 No. 3242) The Regulatory Reform (Fire Safety) Order 2005 (2005 No. 1541) Control of Substances Hazardous to Health Regulations (COSHH, 2002 No. 2677) Provision and Use of Work Equipment Regulations (PUWER, 1998 No. 2306) Personal Protective Equipment Regulations (1992 No. 2966) Control of Major Accident Hazards Regulations (COMAH, 1999 No. 743) Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations (EPS, 1996 No. 192) Chemical Hazards Information and Packaging for Supply (CHIP, 1994 No. 3247) Pressure Systems Safety Regulations (PSSR, 2000 No. 128) Only products that comply with the food regulations 95/2/EC and 2008/84/EC and are labelled as such may be used as food additives. This Safety Data Sheet has been produced to comply with Regulation (EU) 453/2010.

15.2 Chemical safety assessment: No Chemical Safety Assessment has been carried out.

SECTION 16: Other Information

Revision Information: Not relevant.

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
14/15

Key literature references and sources for data:

Various sources of data have been used in the compilation of this SDS, they include but are not exclusive to:

- Agency for Toxic Substances and Diseases Registry (ATSDR)
<http://www.atsdr.cdc.gov/>
- European Chemical Agency: Guidance on the Compilation of Safety Data Sheets.
- European Chemical Agency: Information on Registered Substances
<http://apps.echa.europa.eu/registered/registered-sub.aspx#search>
- European Industrial Gases Association (EIGA) Doc. 169 Classification and Labelling guide.
- International Programme on Chemical Safety (<http://www.inchem.org/>)
- ISO 10156:2010 Gases and gas mixtures - Determination of fire potential and oxidizing ability for the selection of cylinder valve outlets.
- Matheson Gas Data Book, 7th Edition.
- National Institute for Standards and Technology (NIST) Standard Reference Database Number 69
- The ESIS (European chemical Substances Information System) platform of the former European Chemicals Bureau (ECB) ESIS (<http://ecb.jrc.ec.europa.eu/esis/>).
- The European Chemical Industry Council (CEFIC) ERICards.
- United States of America's National Library of Medicine's toxicology data network TOXNET (<http://toxnet.nlm.nih.gov/index.html>)
- Threshold Limit Values (TLV) from the American Conference of Governmental Industrial Hygienists (ACGIH).
- Substance specific information from suppliers.

Details given in this document are believed to be correct at the time of publication.
EH40 (as amended) Workplace exposure limits.

Wording of the R-phrases and H-statements in sections 2 and 3

H220	Extremely flammable gas.
H280	Contains gas under pressure; may explode if heated.
H332	Harmful if inhaled.
H351	Suspected of causing cancer.
H361	Suspected of damaging fertility or the unborn child.
H361fd	Suspected of damaging fertility. Suspected of damaging the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure.
R12	Extremely flammable.
R40	Limited evidence of a carcinogenic effect.
R48/20	Harmful: danger of serious damage to health by prolonged exposure through inhalation.

Training information:

Users of breathing apparatus must be trained. Ensure operators understand the toxicity hazard. Ensure operators understand the flammability hazard.

SAFETY DATA SHEET
Methyl chloride (R40)

Issue date: 16.01.2013
Revision date: 15.10.2013

Version: 1.0

SDS No.: 000010021780
15/15

Classification according to Regulation (EC) No 1272/2008 as amended

Flam. Gas 1, H220
Press. Gas Liq. Gas, H280
Acute Tox. 4, H332
Carc. 2, H351
Repr. 2, H361
STOT RE 2, H373

Other information:

Before using this product in any new process or experiment, a thorough material compatibility and safety study should be carried out. Ensure adequate air ventilation. Ensure all national/local regulations are observed. Whilst proper care has been taken in the preparation of this document, no liability for injury or damage resulting from its use can be accepted. Note: When using this document care should be taken, as the decimal sign and its position complies with rules for the structure and drafting of international standards, and is a comma on the line. As an example 2,000 is two (to three decimal places) and not two thousand, whilst 1.000 is one thousand and not one (to three decimal places).

Issue date:
Disclaimer:

15.10.2013
This information is provided without warranty. The information is believed to be correct. This information should be used to make an independent determination of the methods to safeguard workers and the environment.

SAFETY DATA SHEET

Version 5.8
Revision Date 03/07/2015
Print Date 02/23/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Cyclohexane

Product Number : 320633
Brand : Aldrich
Index-No. : 601-017-00-1

CAS-No. : 110-82-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 1), H400

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H304

May be fatal if swallowed and enters airways.

H315

Causes skin irritation.

H336

May cause drowsiness or dizziness.

H400

Very toxic to aquatic life.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₆ H ₁₂
Molecular weight	: 84.16 g/mol
CAS-No.	: 110-82-7
EC-No.	: 203-806-2
Index-No.	: 601-017-00-1

Hazardous components

Component	Classification	Concentration
Cyclohexane		
	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; H225, H304, H315, H336, H400	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Cyclohexane	110-82-7	TWA	100.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment		
		TWA	300.000000 ppm 1,050.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	300.000000 ppm 1,050.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested:Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 35 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 4 - 7 °C (39 - 45 °F) - lit.
f) Initial boiling point and boiling range	80.7 °C (177.3 °F) - lit.
g) Flash point	-17.99 °C (-0.38 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 9 %(V) Lower explosion limit: 1 %(V)
k) Vapour pressure	225.0 hPa (168.8 mmHg) at 37.7 °C (99.9 °F) 102.7 hPa (77.0 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	0.779 g/cm ³ at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 3.44
p) Auto-ignition temperature	260.0 °C (500.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 12,705 mg/kg

LC50 Inhalation - Rat - 4 h - 34,000 mg/l
(OECD Test Guideline 403)

LD50 Dermal - Rabbit - > 2,000 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

May be fatal if swallowed and enters airways.

Additional Information

RTECS: GU6300000

Central nervous system depression, Drowsiness, Irritability, Dizziness, Gastrointestinal disturbance, Lung irritation, chest pain, pulmonary edema

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish flow-through test LC50 - Pimephales promelas (fathead minnow) - 4.53 mg/l -

96 h
(OECD Test Guideline 203)

Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - Daphnia magna (Water flea) - 0.9 mg/l - 48 h
(OECD Test Guideline 202)

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 3.4 mg/l - 72 h
(OECD Test Guideline 201)

12.2 Persistence and degradability

Biodegradability Result: - Readily biodegradable

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1145 Class: 3 Packing group: II
Proper shipping name: Cyclohexane
Reportable Quantity (RQ): 1000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1145 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: CYCLOHEXANE
Marine pollutant: yes

IATA

UN number: 1145 Class: 3 Packing group: II
Proper shipping name: Cyclohexane

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cyclohexane	110-82-7	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

Massachusetts Right To Know Components

Cyclohexane	CAS-No. 110-82-7	Revision Date 2007-07-01
-------------	---------------------	-----------------------------

Pennsylvania Right To Know Components

Cyclohexane	CAS-No. 110-82-7	Revision Date 2007-07-01
-------------	---------------------	-----------------------------

New Jersey Right To Know Components

Cyclohexane	CAS-No. 110-82-7	Revision Date 2007-07-01
-------------	---------------------	-----------------------------

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
Skin Irrit.	Skin irritation
STOT SE	Specific target organ toxicity - single exposure

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.8

Revision Date: 03/07/2015

Print Date: 02/23/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Dieldrin

Product Number : 291218
Brand : Aldrich
Index-No. : 602-049-00-9

CAS-No. : 60-57-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 2), H300
Acute toxicity, Dermal (Category 3), H311
Carcinogenicity (Category 2), H351
Specific target organ toxicity - repeated exposure, Oral (Category 1), H372
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H300 Fatal if swallowed.
H311 Toxic in contact with skin.
H351 Suspected of causing cancer.
H372 Causes damage to organs through prolonged or repeated exposure if swallowed.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing.
P281	Use personal protective equipment as required.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of soap and water. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 1,2,3,4,10,10-Hexachloro-1,4,4a,5,6,7,8,8a-octahydro-6,7-epoxy-1,4:5,8-dimethanonaphthalene

Formula : C₁₂H₈Cl₆O
Molecular weight : 380.91 g/mol
CAS-No. : 60-57-1
EC-No. : 200-484-5
Index-No. : 602-049-00-9

Hazardous components

Component	Classification	Concentration
Dieldrin	Acute Tox. 2; Acute Tox. 3; Carc. 2; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H300, H311, H351, H372, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs. Provide appropriate exhaust ventilation at places where dust is formed. For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Dieldrin	60-57-1	TWA	0.100000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Liver damage Reproductive effects Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		

		TWA	0.250000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A Potential for dermal absorption		
		TWA	0.250000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--------------------|-------------------|
| a) Appearance | Form: solid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |

d) pH	No data available
e) Melting point/freezing point	Melting point/range: 143 - 144 °C (289 - 291 °F)
f) Initial boiling point and boiling range	No data available
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Mouse - 38.0 mg/kg

LD50 Oral - Dog - 65.0 mg/kg

LD50 Oral - Monkey - 3.0 mg/kg

LD50 Oral - Rabbit - 45.0 mg/kg

LD50 Oral - Pig - 38.0 mg/kg

LD50 Oral - Guinea pig - 49.0 mg/kg

LD50 Oral - Hamster - 60.0 mg/kg

LD50 Oral - Pigeon - 23.7 mg/kg

LD50 Oral - Chicken - 20.0 mg/kg

Remarks: Sense Organs and Special Senses (Nose, Eye, Ear, and Taste):Eye:Miosis (pupillary constriction). Behavioral:Excitement. Behavioral:Food intake (animal).

LD50 Oral - Quail - 10.8 mg/kg

Remarks: Behavioral:Altered sleep time (including change in righting reflex). Behavioral:Somnolence (general depressed activity). Behavioral:Irritability.

LD50 Oral - Duck - 381.0 mg/kg

LD50 Oral - Mammal - 94.0 mg/kg

Remarks: Peripheral Nerve and Sensation:Flaccid paralysis without anesthesia (usually neuromuscular blockage). Behavioral:Tremor. Behavioral:Convulsions or effect on seizure threshold.

LD50 Oral - Bird (wild) - 13.3 mg/kg

LDLO Oral - Rat - 30.0 mg/kg

Remarks: Liver:Other changes.

LDLO Oral - Human - male - 65.0 mg/kg

LDLO Oral - Cat - 500 mg/kg

Remarks: Lungs, Thorax, or Respiration:Chronic pulmonary edema. Liver:Fatty liver degeneration. Kidney, Ureter, Bladder:Other changes.

TDLo Oral - Rat - 140 mg/kg

Remarks: Liver:Other changes. Blood:Other changes. Biochemical:Enzyme inhibition, induction, or change in blood or tissue levels: Other esterases.

TDLo Oral - Rat - 109 mg/kg

Remarks: Liver:Changes in liver weight.

TDLo Oral - Rat - 88 mg/kg

Remarks: Behavioral:Food intake (animal). Nutritional and Gross Metabolic:Weight loss or decreased weight gain. Biochemical:Enzyme inhibition, induction, or change in blood or tissue levels: Phosphatases.

Inhalation: No data available

LD50 Dermal - Rabbit - 250.0 mg/kg

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

- IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Dieldrin)
- NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
- OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

Ingestion - Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

Additional Information

RTECS: IO1750000

Discomfort, Headache, Nausea, Vomiting, Dizziness, Tremors, tonic convulsions, clonic spasms, Coma., respiratory failure, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Blood - Irregularities - Based on Human Evidence

Blood - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish mortality LC50 - Carassius auratus (goldfish) - 1.6 µg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - Daphnia magna (Water flea) - 79.5 µg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 2811 Class: 6.1 Packing group: I
Proper shipping name: Toxic solids, organic, n.o.s. (Dieldrin)
Reportable Quantity (RQ): 1 lbs
Marine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: I EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Dieldrin)
Marine pollutant:yes

IATA

UN number: 2811 Class: 6.1 Packing group: I
Proper shipping name: Toxic solid, organic, n.o.s. (Dieldrin)
IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Dieldrin	60-57-1	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Dieldrin	60-57-1	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Dieldrin	60-57-1	1993-04-24

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Dieldrin	60-57-1	2007-09-28

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H300	Fatal if swallowed.
H311	Toxic in contact with skin.
H351	Suspected of causing cancer.
H372	Causes damage to organs through prolonged or repeated exposure if swallowed.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard: 4
Chronic Health Hazard: *
Flammability: 0
Physical Hazard 0

NFPA Rating

Health hazard: 2
Fire Hazard: 0
Reactivity Hazard: 0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.5

Revision Date: 02/28/2015

Print Date: 02/09/2016

SAFETY DATA SHEET

Version 5.4
Revision Date 03/03/2015
Print Date 04/11/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : 1,4-Dioxane
Product Number : 296309
Brand : Sigma-Aldrich
Index-No. : 603-024-00-5
CAS-No. : 123-91-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA
Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225
Eye irritation (Category 2A), H319
Carcinogenicity (Category 2), H351
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.
H319 Causes serious eye irritation.
H335 May cause respiratory irritation.
H351 Suspected of causing cancer.

Precautionary statement(s)

P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.
P210 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
P233 Keep container tightly closed.

P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P281	Use personal protective equipment as required.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides., Repeated exposure may cause skin dryness or cracking.
May form explosive peroxides.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	Dioxane Diethylene oxide
Formula	:	C ₄ H ₈ O ₂
Molecular weight	:	88.11 g/mol
CAS-No.	:	123-91-1
EC-No.	:	204-661-8
Index-No.	:	603-024-00-5
Registration number	:	01-2119462837-26-XXXX

Hazardous components

Component	Classification	Concentration
1,4-Dioxane	Flam. Liq. 2; Eye Irrit. 2A; Carc. 2; STOT SE 3; H225, H319, H335, H351	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
1,4-Dioxane	123-91-1	TWA	20.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Liver damage Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		
		TWA	20 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Liver damage Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		
		TWA	25 ppm 90 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		
		TWA	100.000000 ppm 360.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		
		TWA	100 ppm 360 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		
		C	1.000000 ppm 3.600000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A 30 minute ceiling value		

Derived No Effect Level (DNEL)

Application Area	Exposure routes	Health effect	Value
Workers	Inhalation	Long-term local effects	144 mg/m3
Workers	Inhalation	Long-term systemic effects	73 mg/m3
Workers	Skin contact	Long-term systemic effects	21 mg/m3

Predicted No Effect Concentration (PNEC)

Compartment	Value
Soil	0.153 mg/kg
Marine water	0.67 mg/l
Fresh water	10 mg/l
Fresh water sediment	37 mg/kg
Sewage treatment plant	2700 mg/l
Aquatic intermittent release	10 mg/l

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

Splash contact

Material: Chloroprene

Minimum layer thickness: 0.6 mm

Break through time: 35 min

Material tested: Camapren® (KCL 722 / Aldrich Z677493, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: liquid
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | 6.0 - 8 at 500 g/l at 20 °C (68 °F) |
| e) Melting point/freezing point | Melting point/range: 10 - 12 °C (50 - 54 °F) - lit. |
| f) Initial boiling point and boiling range | 100 - 102 °C (212 - 216 °F) - lit. |
| g) Flash point | 12 °C (54 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 22 %(V)
Lower explosion limit: 2 %(V) |
| k) Vapour pressure | 36 hPa (27 mmHg) at 20 °C (68 °F)
53 hPa (40 mmHg) at 25.20 °C (77.36 °F) |
| l) Vapour density | 3.04 - (Air = 1.0) |

- | | |
|---|--|
| m) Relative density | 1.034 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | completely miscible |
| o) Partition coefficient: n-octanol/water | log Pow: -0.27 |
| p) Auto-ignition temperature | 300 °C (572 °F) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

- | | |
|-------------------------|----------------------------|
| Surface tension | 36.9 mN/m at 25 °C (77 °F) |
| Relative vapour density | 3.04 - (Air = 1.0) |

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air. Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Oxygen, Oxidizing agents, Halogens, Reducing agents, Perchlorates., Trimethylaluminum

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 4,200 mg/kg

LC50 Inhalation - Rat - 2 h - 46,000 mg/m³

Remarks: Sense Organs and Special Senses (Nose, Eye, Ear, and Taste):Eye:Other.

LD50 Dermal - Rabbit - 7,858 mg/kg

No data available

Skin corrosion/irritation

Skin - Human

Remarks: Chronic exposure causes drying effect on the skin and eczema.

Skin - Rabbit

Result: No skin irritation

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (1,4-Dioxane)

NTP: Reasonably anticipated to be a human carcinogen (1,4-Dioxane)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: JG8225000

Nausea, Vomiting, Weakness, Dizziness, Vertigo, Headache, Sweating, loss of appetite, Kidney injury may occur., Liver injury may occur.

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 985 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 8,450 mg/l - 24 h

Toxicity to algae EC50 - Desmodesmus subspicatus (green algae) - > 500 mg/l - 72 h

12.2 Persistence and degradability

Biodegradability Result: < 5 % - Not readily biodegradable.

12.3 Bioaccumulative potential

Does not bioaccumulate.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1165 Class: 3 Packing group: II
Proper shipping name: Dioxane
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1165 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: DIOXANE

IATA

UN number: 1165 Class: 3 Packing group: II
Proper shipping name: Dioxane

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,4-Dioxane	123-91-1	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,4-Dioxane	123-91-1	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,4-Dioxane	123-91-1	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,4-Dioxane	123-91-1	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
1,4-Dioxane	123-91-1	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
STOT SE	Specific target organ toxicity - single exposure

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.4

Revision Date: 03/03/2015

Print Date: 04/11/2016

MATERIAL SAFETY DATA SHEET

Date Printed: 02.04.2016

Date Updated: 07.08.2012

Version 1.9

Section 1 - Product and Company Information

Product Name M-CRESOL APPROX 99%
Product Number C5015
Brand SIGMA

Company Sigma-Aldrich
Address 3050 Spruce Street
SAINT LOUIS MO 63103 US

Technical Phone: 800-325-5832
Fax: 800-325-5052
Emergency Phone: 314-776-6555

Section 2 - Composition/Information on Ingredient

Substance Name	CAS #	SARA 313
M-CRESOL	108-39-4	Yes

Formula C7H8O
Synonyms 3-Cresol * m-Cresol (ACGIH:OSHA) * m-Cresole *
m-Cresylic acid * 1-Hydroxy-3-methylbenzene *
m-Hydroxytoluene * 3-Hydroxytoluene * m-Kresol *
m-Methylphenol * 3-Methylphenol * m-Oxytoluene *
Phenol, 3-methyl- (9CI) * RCRA waste number U052
* m-Toluol

RTECS Number: GO6125000

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Toxic.

Toxic in contact with skin and if swallowed. Causes burns.

Readily absorbed through skin. Combustible. Target organ(s):

Central nervous system. Lungs.

HMIS RATING

HEALTH: 3*

FLAMMABILITY: 2

REACTIVITY: 1

NFPA RATING

HEALTH: 3

FLAMMABILITY: 2

REACTIVITY: 1

*additional chronic hazards present.

For additional information on toxicity, please refer to Section 11.

Section 4 - First Aid Measures

ORAL EXPOSURE

If swallowed, wash out mouth with water provided person is conscious. Call a physician immediately. Do not induce vomiting.

INHALATION EXPOSURE

If inhaled, remove to fresh air. If not breathing give artificial respiration. If breathing is difficult, give oxygen.

DERMAL EXPOSURE

In case of skin contact, flush with copious amounts of water for at least 15 minutes. Remove contaminated clothing and shoes. Call a physician.

EYE EXPOSURE

In case of contact with eyes, flush with copious amounts of water for at least 15 minutes. Assure adequate flushing by separating the eyelids with fingers. Call a physician.

Section 5 - Fire Fighting Measures

FLASH POINT

186,800 °F 86,000 °C Method: closed cup

EXPLOSION LIMITS

Lower: 1,060 % Upper: 1,350 %

AUTOIGNITION TEMP

558,00 °C

FLAMMABILITY

N/A

EXTINGUISHING MEDIA

Suitable: Carbon dioxide, dry chemical powder, or appropriate foam.

FIREFIGHTING

Protective Equipment: Wear self-contained breathing apparatus and protective clothing to prevent contact with skin and eyes. Specific Hazard(s): Combustible liquid. Emits toxic fumes under fire conditions.

Section 6 - Accidental Release Measures

PROCEDURE TO BE FOLLOWED IN CASE OF LEAK OR SPILL

Evacuate area.

PROCEDURE(S) OF PERSONAL PRECAUTION(S)

Wear self-contained breathing apparatus, rubber boots, and heavy rubber gloves.

METHODS FOR CLEANING UP

Cover with dry lime or soda ash, pick up, keep in a closed container, and hold for waste disposal. Ventilate area and wash spill site after material pickup is complete.

Section 7 - Handling and Storage

HANDLING

User Exposure: Do not breathe vapor. Do not get in eyes, on

skin, on clothing. Avoid prolonged or repeated exposure.

STORAGE

Suitable: Keep tightly closed. Keep away from heat and open flame. Store in a cool dry place.

Unsuitable: May discolor on exposure to air and light.

Section 8 - Exposure Controls / PPE

ENGINEERING CONTROLS

Use only in a chemical fume hood. Safety shower and eye bath.

PERSONAL PROTECTIVE EQUIPMENT

Respiratory: Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU). Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator.

Hand: Compatible chemical-resistant gloves.

Eye: Chemical safety goggles.

Other: Faceshield (8-inch minimum).

GENERAL HYGIENE MEASURES

Wash contaminated clothing before reuse. Discard contaminated shoes. Wash thoroughly after handling.

EXPOSURE LIMITS, RTECS

Country	Source	Type	Value
USA	ACGIH	TWA	5 PPM
Remarks: Skin			
USA	MSHA Standard-air	TWA	5 PPM (22 MG/M3)
USA	OSHA.	PEL	8H TWA 5 PPM (22 MG/M3) (SKIN)
New Zealand OEL			
Remarks: check ACGIH TLV			
USA	NIOSH	TWA	2.3 PPM

Section 9 - Physical/Chemical Properties

Appearance	Physical State: Liquid	
Property	Value	At Temperature or Pressure
Molecular Weight	108,1400 AMU	
pH	N/A	
BP/BP Range	200,000. - 203,000 °C.	
MP/MP Range	8,000. - 10,000 °C.	
Freezing Point	N/A	
Vapor Pressure	< 1,000000000 mmHg	20,00 °C
Vapor Density	3,720 g/l	
Saturated Vapor Conc.	N/A	
SG/Density	1,0340 g/cm3	
Bulk Density	N/A	
Odor Threshold	N/A	
Volatile%	N/A	
VOC Content	N/A	
Water Content	N/A	
Solvent Content	N/A	

Evaporation Rate	N/A	
Viscosity	12,900 Pas	25,000 °C
Surface Tension	N/A	
Partition Coefficient	N/A	
Decomposition Temp.	N/A	
Flash Point	186,800 °F 86,000 °C	Method: closed cup
Explosion Limits	Lower: 1,060 % Upper: 1,350 %	
Flammability	N/A	
Autoignition Temp	558,00 °C	
Refractive Index	1,5420	
Optical Rotation	N/A	
Miscellaneous Data	N/A	
Solubility	Other Solvents: SOLUBLE IN ACETONE, ETHANOL, MISCIBLE IN ALCOHOL, ETHER	

N/A = not available

Section 10 - Stability and Reactivity

STABILITY

Stable: Stable.

Materials to Avoid: Oxidizing agents, Bases.

HAZARDOUS DECOMPOSITION PRODUCTS

Hazardous Decomposition Products: Carbon monoxide, Carbon dioxide.

HAZARDOUS POLYMERIZATION

Hazardous Polymerization: Will not occur

Section 11 - Toxicological Information

ROUTE OF EXPOSURE

Skin Contact: Causes burns.

Skin Absorption: Toxic if absorbed through skin. Readily absorbed through skin.

Eye Contact: Causes burns.

Inhalation: May be harmful if inhaled. Material is extremely destructive to the tissue of the mucous membranes and upper respiratory tract.

Ingestion: Toxic if swallowed.

TARGET ORGAN(S) OR SYSTEM(S)

Central nervous system. Eyes. Liver. Kidneys. Lungs.

SIGNS AND SYMPTOMS OF EXPOSURE

Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin.

Inhalation may result in spasm, inflammation and edema of the larynx and bronchi, chemical pneumonitis, and pulmonary edema.

Symptoms of exposure may include burning sensation, coughing, wheezing, laryngitis, shortness of breath, headache, nausea, and vomiting. Exposure can cause: Damage to the eyes. Damage to the kidneys. To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

TOXICITY DATA

Oral
Rat
242,000000 mg/kg
LD50
Remarks: Behavioral:Somnolence (general depressed activity).
Behavioral:Convulsions or effect on seizure threshold.
Gastrointestinal:Peritonitis.

Inhalation
Rat
> 710,000 mg/m3
LC50

Skin
Rat
1100,000000 mg/kg
LD50

Oral
Mouse
828,000000 mg/kg
LD50

Intraperitoneal
Mouse
168 MG/KG
LD50

Skin
Rabbit
2050,000000 mg/kg
LD50
Remarks: Behavioral:Convulsions or effect on seizure threshold.
Sense Organs and Special Senses (Nose, Eye, Ear, and
Taste):Eye:Lacrimation. Gastrointestinal:Changes in structure or
function of salivary glands.

IRRITATION DATA

Skin
Rabbit
517,000000 mg
24H
Remarks: Severe irritation effect

Eyes
Rabbit
103,000000 mg
Remarks: Severe irritation effect

CHRONIC EXPOSURE - CARCINOGEN

Species: Mouse
Route of Application: Skin
Dose: 2280 MG/KG
Exposure Time: 20W
Frequency: I
Result: Tumorigenic:Neoplastic by RTECS criteria. Skin and
Appendages: Other: Tumors.

CHRONIC EXPOSURE - TERATOGEN

Species: Rabbit
Dose: 134 GM/KG
Route of Application: Subcutaneous
Exposure Time: (6-18D PREG)
Result: Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

CHRONIC EXPOSURE - MUTAGEN

Species: Human
Dose: 10 UMOL/L
Exposure Time: 4H
Cell Type: HeLa cell
Mutation test: DNA inhibition

Section 12 - Ecological Information

ACUTE ECOTOXICITY TESTS

Test Type: EC50 Algae
Time: 24,0 h
Value: 110,000 mg/l

Test Type: EC50 Daphnia
Species: Daphnia magna
Time: 24,0 h
Value: 25,000 mg/l

Test Type: LC50 Fish
Species: Leuciscus idus
Time: 48,0 h
Value: 17,000. - 19,000 mg/l.

Test Type: LC50 Fish
Species: Onchorhynchus mykiss (Rainbow trout)
Time: 96,0 h
Value: 8,900 mg/l

Section 13 - Disposal Considerations

APPROPRIATE METHOD OF DISPOSAL OF SUBSTANCE OR PREPARATION

This combustible material may be burned in a chemical incinerator equipped with an afterburner and scrubber. Observe all federal, state, and local environmental regulations.

Section 14 - Transport Information

DOT

Proper Shipping Name: Cresols
UN#: 2076
Class: 6.1
Packing Group: Packing Group II
Hazard Label: Toxic substances.
Hazard Label: Corrosive
PIH: Not PIH

IATA

Proper Shipping Name: Cresols, liquid (o-, m-, p-)

IATA UN Number: 2076
Hazard Class: 6.1
Packing Group: II

Section 15 - Regulatory Information

EU DIRECTIVES CLASSIFICATION

Symbol of Danger: T
Indication of Danger: Toxic.
R: 24/25-34
Risk Statements: Toxic in contact with skin and if swallowed.
Causes burns.
S: 36/37/39-45
Safety Statements: Wear suitable protective clothing, gloves, and eye/face protection. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

US CLASSIFICATION AND LABEL TEXT

Indication of Danger: Toxic.
Risk Statements: Toxic in contact with skin and if swallowed.
Causes burns.
Safety Statements: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Wear suitable protective clothing, gloves, and eye/face protection. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).
US Statements: Readily absorbed through skin. Combustible.
Target organ(s): Central nervous system. Lungs.

UNITED STATES REGULATORY INFORMATION

SARA LISTED: Yes
DEMINIMIS: 1,000 %
TSCA INVENTORY ITEM: Yes

CANADA REGULATORY INFORMATION

WHMIS Classification: This product has been classified in accordance with the hazard criteria of the CPR, and the MSDS contains all the information required by the CPR.
DSL: Yes
NDSL: No

Section 16 - Other Information

DISCLAIMER

For R&D use only. Not for drug, household or other uses.

WARRANTY

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Inc., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale. Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

SAFETY DATA SHEET

Version 4.7
Revision Date 05/27/2015
Print Date 04/01/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : o-Cresol

Product Number : C85700
Brand : Sigma-Aldrich
Index-No. : 604-004-00-9

CAS-No. : 95-48-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 3), H301
Acute toxicity, Dermal (Category 3), H311
Skin corrosion (Category 1B), H314
Serious eye damage (Category 1), H318
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H301 + H311

Toxic if swallowed or in contact with skin

H314

Causes severe skin burns and eye damage.

H318

Causes serious eye damage.

H411

Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P260

Do not breathe dust or mist.

P264

Wash skin thoroughly after handling.

P270

Do not eat, drink or smoke when using this product.

P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician. Rinse mouth.
P301 + P330 + P331	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P305 + P351 + P338 + P310	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/ physician.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: 2-Methylphenol
Formula	: C ₇ H ₈ O
Molecular weight	: 108.14 g/mol
CAS-No.	: 95-48-7
EC-No.	: 202-423-8
Index-No.	: 604-004-00-9

Hazardous components

Component	Classification	Concentration
o-Cresol	Acute Tox. 3; Skin Corr. 1B; Eye Dam. 1; Aquatic Acute 2; Aquatic Chronic 2; H301 + H311, H314, H318, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Take off contaminated clothing and shoes immediately. Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician. Continue rinsing eyes during transport to hospital.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Air and light sensitive. Keep in a dry place.

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
o-Cresol	95-48-7	TWA	5.000000 ppm 22.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	Skin contact does contribute to exposure.		

		TWA	5.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Eye, skin, & Upper Respiratory Tract irritation Adopted values or notations enclosed are those for which changes are proposed in the NIC 2010 Revision or addition to the notice of intended changes See Notice of Intended Changes (NIC) Danger of cutaneous absorption		
		TWA	2.300000 ppm 10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	20.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Not classifiable as a human carcinogen Danger of cutaneous absorption		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested:Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 30 min

Material tested:Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: powder Colour: white
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	4.5 at 25.00000 g/l
e) Melting point/freezing point	Melting point/range: 29 - 31 °C (84 - 88 °F) - lit.
f) Initial boiling point and boiling range	191 °C (376 °F) - lit.
g) Flash point	81.0 °C (177.8 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 58 %(V) Lower explosion limit: 1.3 %(V)
k) Vapour pressure	3.1 hPa (2.3 mmHg) at 60.0 °C (140.0 °F) 1.3 hPa (1.0 mmHg) at 38.2 °C (100.8 °F) 0.4 hPa (0.3 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	1.05 g/cm ³ at 20.00 °C (68.00 °F)
n) Water solubility	25 g/l at 20 °C (68 °F)
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	599.0 °C (1,110.2 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 121.0 mg/kg

Remarks: Behavioral:Convulsions or effect on seizure threshold. Lungs, Thorax, or Respiration:Dyspnea.
Gastrointestinal:Ulceration or bleeding from stomach.

LC50 Inhalation - Rat - 1 h - > 1,220 mg/m³

Remarks: Sense Organs and Special Senses (Nose, Eye, Ear, and Taste):Eye:Lacrimation. Behavioral:Somnolence (general depressed activity).

LD50 Dermal - Rabbit - 890.0 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Severe skin irritation - 24 h
(Draize Test)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Severe eye irritation
(Draize Test)

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: GO6300000

Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, Central nervous system depression, Diarrhoea, Gastrointestinal disturbance

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Leuciscus idus (Golden orfe) - 10.00 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - Daphnia magna (Water flea) - 15.8 mg/l - 48 h
Toxicity to algae EC50 - SELENASTRUM - 100.00 mg/l - 72 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life with long lasting effects.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3455 Class: 6.1 (8) Packing group: II
Proper shipping name: Cresols, solid
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 3455 Class: 6.1 (8) Packing group: II EMS-No: F-A, S-B
Proper shipping name: CRESOLS, SOLID

IATA

UN number: 3455 Class: 6.1 (8) Packing group: II
Proper shipping name: Cresols, solid

15. REGULATORY INFORMATION

SARA 302 Components

The following components are subject to reporting levels established by SARA Title III, Section 302:

	CAS-No.	Revision Date
o-Cresol	95-48-7	2007-07-01

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
o-Cresol	95-48-7	2007-07-01

Massachusetts Right To Know Components

	CAS-No.	Revision Date
o-Cresol	95-48-7	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
o-Cresol	95-48-7	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
o-Cresol	95-48-7	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Dam.	Serious eye damage
H301	Toxic if swallowed.
H301 + H311	Toxic if swallowed or in contact with skin
H311	Toxic in contact with skin.
H314	Causes severe skin burns and eye damage.
H318	Causes serious eye damage.

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.7

Revision Date: 05/27/2015

Print Date: 04/01/2016

SAFETY DATA SHEET

Version 4.10
Revision Date 11/12/2015
Print Date 02/07/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : *p*-Cresol
Product Number : W233706
Brand : Aldrich
Index-No. : 604-004-00-9
CAS-No. : 106-44-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA
Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301
Acute toxicity, Dermal (Category 3), H311
Skin corrosion (Category 1B), H314
Serious eye damage (Category 1), H318
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H301 + H311 Toxic if swallowed or in contact with skin
H314 Causes severe skin burns and eye damage.
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P260 Do not breathe dust or mist.
P264 Wash skin thoroughly after handling.
P270 Do not eat, drink or smoke when using this product.

P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P301 + P330 + P331	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P310	Immediately call a POISON CENTER or doctor/ physician.
P322	Specific measures (see supplemental first aid instructions on this label).
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: 4-Methylphenol
Formula	: C ₇ H ₈ O
Molecular weight	: 108.14 g/mol
CAS-No.	: 106-44-5
EC-No.	: 203-398-6
Index-No.	: 604-004-00-9

Hazardous components

Component	Classification	Concentration
p-Cresol	Acute Tox. 3; Skin Corr. 1B; Eye Dam. 1; Aquatic Acute 2; Aquatic Chronic 2; H301 + H311, H314, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

- 4.3 Indication of any immediate medical attention and special treatment needed**
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

hygroscopic Air and light sensitive. Handle and store under inert gas.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
p-Cresol	106-44-5	TWA	2.3 ppm 10 mg/m ³	USA. NIOSH Recommended Exposure Limits
		TWA	5 ppm 22 mg/m ³	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	Skin designation The value in mg/m ³ is approximate.		

		TWA	20 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Not classifiable as a human carcinogen Danger of cutaneous absorption		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested:Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 30 min

Material tested:Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---------------------------|--|
| a) Appearance | Form: crystalline
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing | Melting point/range: 31 - 37 °C (88 - 99 °F) |

point	Melting point/range: 32 - 34 °C (90 - 93 °F) - lit.
f) Initial boiling point and boiling range	202 °C (396 °F) - lit.
g) Flash point	85.0 °C (185.0 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Lower explosion limit: 1.1 %(V)
k) Vapour pressure	1.3 hPa (1.0 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	1.034 g/cm ³ at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 1.94
p) Auto-ignition temperature	559.0 °C (1,038.2 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents, Bases

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 207.0 mg/kg

Remarks: Sense Organs and Special Senses (Nose, Eye, Ear, and Taste):Olfaction:Other changes.

Behavioral:Convulsions or effect on seizure threshold. Gastrointestinal:Ulceration or bleeding from stomach.

LC50 Inhalation - Rat - 1 h - > 710 mg/m³

LD50 Dermal - Rabbit - 301.0 mg/kg

Remarks: Behavioral:Tremor. Gastrointestinal:Changes in structure or function of salivary glands. Kidney, Ureter, Bladder:Other changes.

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Severe skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Severe eye irritation

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: GO6475000

Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, laryngitis, Dizziness, Cardiovascular effects., Muscle cramps/spasms., Symptoms of exposure may include burning sensation, coughing, wheezing, laryngitis, shortness of breath, headache, nausea, and vomiting.

Kidney -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - other fish - 16.00 - 24.00 mg/l - 24 h
	LC50 - Oncorhynchus mykiss (rainbow trout) - 7.9 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates	LC50 - Daphnia magna (Water flea) - 1.4 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Does not bioaccumulate.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3455 Class: 6.1 (8) Packing group: II
Proper shipping name: Cresols, solid
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 3455 Class: 6.1 (8) Packing group: II EMS-No: F-A, S-B
Proper shipping name: CRESOLS, SOLID

IATA

UN number: 3455 Class: 6.1 (8) Packing group: II
Proper shipping name: Cresols, solid

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
p-Cresol	106-44-5	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
p-Cresol	106-44-5	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
p-Cresol	106-44-5	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
p-Cresol	106-44-5	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Dam.	Serious eye damage
H301	Toxic if swallowed.
H301 + H311	Toxic if swallowed or in contact with skin
H311	Toxic in contact with skin.
H314	Causes severe skin burns and eye damage.

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.10

Revision Date: 11/12/2015

Print Date: 02/07/2016

SAFETY DATA SHEET

Version 5.11
Revision Date 06/18/2015
Print Date 02/11/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Bis(2-ethylhexyl) phthalate

Product Number : 80030
Brand : Sigma-Aldrich
Index-No. : 607-317-00-9

CAS-No. : 117-81-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Reproductive toxicity (Category 1B), H360

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H360

May damage fertility or the unborn child.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P281

Use personal protective equipment as required.

P308 + P313

IF exposed or concerned: Get medical advice/ attention.

P405

Store locked up.

P501

Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Endocrine disrupting chemical(s)

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 'Diocetyl' phthalate
Phthalic acid bis(2-ethylhexyl ester)
DEHP

Formula : C₂₄H₃₈O₄
Molecular weight : 390.56 g/mol
CAS-No. : 117-81-7
EC-No. : 204-211-0
Index-No. : 607-317-00-9
Registration number : 01-2119484611-38-XXXX

Hazardous components

Component	Classification	Concentration
bis(2-Ethylhexyl) phthalate Included in the Candidate List of Substances of Very High Concern (SVHC) according to Regulation (EC) No. 1907/2006 (REACH)		
	Repr. 1B; H360	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
bis(2-Ethylhexyl) phthalate	117-81-7	TWA	5.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Lower Respiratory Tract irritation Confirmed animal carcinogen with unknown relevance to humans		
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 480 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 230 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: liquid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | -50.0 °C (-58.0 °F) |
| f) Initial boiling point and boiling range | 386 °C (727 °F) - lit. |
| g) Flash point | 207.0 °C (404.6 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Lower explosion limit: 0.3 %(V) |
| k) Vapour pressure | 1.6 hPa (1.2 mmHg) at 93.0 °C (199.4 °F) |
| l) Vapour density | No data available |
| m) Relative density | 0.985 g/cm ³ at 20 °C (68 °F) |
| n) Water solubility | insoluble |

- | | |
|---|---------------------|
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | 390.0 °C (734.0 °F) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 30,000 mg/kg

Inhalation: No data available

LD50 Dermal - Rabbit - 25,000 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Mild skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation - 24 h

Respiratory or skin sensitisation

Maximisation Test (GPMT) - Guinea pig

Result: Does not cause skin sensitisation.
(OECD Test Guideline 406)

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (bis(2-Ethylhexyl) phthalate)
NTP: Reasonably anticipated to be a human carcinogen (bis(2-Ethylhexyl) phthalate)
OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

May cause congenital malformation in the fetus.
Presumed human reproductive toxicant

May cause reproductive disorders.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: T10350000

Effects due to ingestion may include:, Gastrointestinal disturbance

Kidney -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - > 0.67 mg/l - 96 h LC50 - Oncorhynchus mykiss (rainbow trout) - > 0.32 mg/l - 96 h LC50 - Cyprinodon variegatus (sheepshead minnow) - > 0.17 mg/l - 96 h LC50 - Lepomis macrochirus (Bluegill) - > 0.20 mg/l - 96 h NOEC - other fish - > 0.3 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - Daphnia magna (Water flea) - > 0.16 mg/l - 48 h

12.2 Persistence and degradability

Biodegradability	Result: - Readily biodegradable (OECD Test Guideline 301)
------------------	---

12.3 Bioaccumulative potential

Bioaccumulation	Oncorhynchus mykiss (rainbow trout) - 100 d - 0.014 mg/l Bioconcentration factor (BCF): 113 Remarks: Does not bioaccumulate.
-----------------	--

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3082 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (bis(2-Ethylhexyl) phthalate)
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2007-07-01

SARA 311/312 Hazards

Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2009-02-01

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2009-02-01

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H360 May damage fertility or the unborn child.
Repr. Reproductive toxicity

HMIS Rating

Health hazard: 0
Chronic Health Hazard: *
Flammability: 1
Physical Hazard 0

NFPA Rating

Health hazard: 0
Fire Hazard: 1
Reactivity Hazard: 0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.11

Revision Date: 06/18/2015

Print Date: 02/11/2016

Last Revision Date: 1/11/2012

SECTION 1 - CHEMICAL PRODUCT and COMPANY IDENTIFICATION

Catalog Number: M-CSM8080U99
Description: Pesticide Control Sample Mixture in Toluene
Product is: Mixture

Supplied by CHEM SERVICE, Inc. PO BOX 599, WEST CHESTER, PA 19381 (610)-692-3026
EMERGENCY PHONE: 1-610-692-3026

SECTION 2 - COMPOSITION, INFORMATION ON INGREDIENTS

The following compounds are contained in this mixture at the stated concentrations:

<u>CONC</u>	<u>ANALYTE</u>	<u>CAS</u>
100ug/ml	4,4'-DDD	72-54-8
100ug/ml	4,4'-DDT	50-29-3
100ug/ml	b-Endosulfan	33213-65-9
100ug/ml	Endosulfan sulfate	1031-07-8
100ug/ml	Endrin	72-20-8
20ug/ml	Heptachlor	76-44-8
20ug/ml	BHC (alpha isomer)	319-84-6
20ug/ml	BHC (beta isomer)	319-85-7
20ug/ml	a-Endosulfan	959-98-8
20ug/ml	Heptachlor epoxide (Isomer B)	1024-57-3
20ug/ml	Aldrin	309-00-2
20ug/ml	Dieldrin	60-57-1
20ug/ml	4,4'-DDE	72-55-9

SECTION 3 - HAZARDS IDENTIFICATION

Contact lenses should not be worn in the laboratory. All chemicals should be considered hazardous - Avoid direct physical contact!

For the solvent: Toluene

Can cause eye irritation. Prolonged exposure may cause nausea/headache/dizziness and/or eye damage. May be harmful if inhaled. Dust and/or vapors can cause irritation to respiratory tract. Can be irritating to mucous membranes.

May be harmful if swallowed. Can cause gastro-intestinal disturbances. Can cause blood disorders. Exposure can cause liver damage. Exposure can cause kidney damage.

Can cause skin irritation. May be harmful if absorbed through the skin. May be rapidly absorbed through the skin with potential adverse health effects.

Can cause delayed adverse health effects. Can cause nervous system injury.

Avoid consumption of alcohol before and after handling of this compound because it will increase the toxicity of the compound. Narcotic at high concentrations.

This chemical is considered to cause DEVELOPMENTAL TOXICITY by the state of California.

SECTION 4 - FIRST AID MEASURES

An antidote is a substance intended to counteract the effect of a poison. It should be administered only by a physician or trained emergency personnel. Medical advice can be obtained from a POISON CONTROL CENTER.

For the solvent: Toluene

In case of contact: Flush eyes continuously with water for 15-20 minutes. Flush skin with water for 15-20 minutes. If no burns have occurred-use soap and water to cleanse skin. If inhaled remove patient to fresh air. Administer oxygen if patient is having difficulty breathing. If patient has stopped breathing administer artificial respirations. If patient is in cardiac arrest administer CPR. Continue life supporting measures until medical assistance has arrived. Contact Poison Control Center immediately if necessary.

Remove and wash contaminated clothing. If patient is exhibiting signs of shock - Keep warm and quiet.

If swallowed DO NOT induce vomiting. If taken internally give milk, milk of magnesia or egg whites beaten with water. Do not administer liquids or induce vomiting to an unconscious or convulsing person. If patient is vomiting-watch closely to make sure airway does not become obstructed by vomit.

Get medical attention if necessary.

SECTION 5 - FIRE AND EXPLOSION DATA

For the solvent: Toluene

Flash Point:	4.4°C
Extinguishing Media:	Carbon dioxide or dry chemical powder. DO NOT USE WATER!
Lower Explosion Limit:	1.2%
Upper Explosion Limit:	7%
Autoignition Temperature:	535°C

NFPA Scale:	0 - Least, 1 - Slight, 2 - Moderate, 3 - High, 4 - Severe
NFPA Hazard Rating:	Health: 2, Reactivity: 0, Flammability: 3

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Spills or Leaks: Evacuate area. Wear appropriate OSHA regulated equipment. Ventilate area. Absorb on vermiculite or similar material. Sweep up and place in an appropriate container. Hold for disposal.

Wash contaminated surfaces to remove any residue.

Remove contaminated clothing and wash before reuse.

SECTION 7 - HANDLING AND STORAGE

Handling: This chemical should be handled only in a hood. Eye shields should be worn. Use appropriate OSHA/MSHA approved safety equipment. Avoid contact with skin, eyes and clothing. Avoid ingestion and inhalation. Wash thoroughly after handling.

Storage: Store in a cool dry place. Store only with compatible chemicals. Keep tightly closed.

SECTION 8 - EXPOSURE CONTROLS/PERSONAL PROTECTION

For the solvent: Toluene

OSHA PEL (TWA):	100 ppm (375mg/m ³)
ACGIH TLV (TWA):	50ppm (147mg/m ³)
ACGIH TLV (STEL):	Data Not Available

Personal Protective Equipment

Eyes: Wear Safety Glasses.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to minimize contact with skin.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 requirements must be followed whenever workplace conditions warrant the use of a respirator.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

For the solvent: Toluene

Color: Colorless
Phase: Liquid
Melting Point: -95°C
Boiling Point: 110.6°C
Specific Gravity: 0.866g/mL @ 20°C
Vapor Density: 2.9
Vapor Pressure: 29.1hPa @ 20°C
Solubility in Water: Very slightly soluble
Odor: Aromatic
Evaporation Rate (Butyl acetate=1): 1.9
Molecular Weight: 92.14
Molecular Formula: C7H8

SECTION 10 - STABILITY AND REACTIVITY

For the solvent: Toluene

Flammable. Readily absorbed and retained on clothing and/or shoes.
Volatile. Incompatible with strong oxidizing agents. Decomposition liberates toxic fumes.
Hygroscopic.

SECTION 11 - TOXICOLOGY INFORMATION

Since this solution contains a very low concentration of active component, the primary hazard is from the solvent.

The LD50 for the minor component:

<u>ANALYTE</u>	<u>CAS</u>	<u>LD50</u>
4,4'-DDD	72-54-8	113 mg/kg
4,4'-DDT	50-29-3	87 mg/kg
b-Endosulfan	33213-65-9	240 mg/kg
Endosulfan sulfate	1031-07-8	18 mg/kg
Endrin	72-20-8	8 mg/kg
Heptachlor	76-44-8	40 mg/kg
BHC (alpha isomer)	319-84-6	177 mg/kg
BHC (beta isomer)	319-85-7	6,000 mg/kg
a-Endosulfan	959-98-8	76 mg/kg
Heptachlor epoxide (Isomer B)	1024-57-3	15 mg/kg
Aldrin	309-00-2	38 mg/kg
Dieldrin	60-57-1	38 mg/kg
4,4'-DDE	72-55-9	880 mg/kg

For the solvent: Toluene

RTECS: XS5250000
Oral Rat or Mouse LD50: 5000.0 mg/kg
Dermal Rat or Mouse LD50: N/A mg/kg
Rat or Mouse LC50 : 49 g/m³(4h)

Carcinogenicity

OSHA: NO
IARC: NO Details: 3

NTP: NO
 ACGIH: NO Details: A4
 NIOSH: NO
 Other: NO

Property 65: This chemical is considered to cause DEVELOPMENTAL TOXICITY by the state of California.

Carcinogenicity

For the minor component:

4,4'-DDD	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	Yes	<u>NIOSH</u>	No	<u>ACGIH</u>	No
4,4'-DDT	<u>OSHA</u>	No	<u>NTP</u>	Yes	<u>IARC</u>	Yes	<u>NIOSH</u>	Yes	<u>ACGIH</u>	No
Heptachlor	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	Yes	<u>NIOSH</u>	Yes	<u>ACGIH</u>	Yes
BHC (alpha isomer)	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	Yes	<u>NIOSH</u>	No	<u>ACGIH</u>	No
BHC (beta isomer)	<u>OSHA</u>	No	<u>NTP</u>	Yes	<u>IARC</u>	Yes	<u>NIOSH</u>	No	<u>ACGIH</u>	No
Heptachlor epoxide (Isomer B)	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	Yes	<u>NIOSH</u>	No	<u>ACGIH</u>	No
Aldrin	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	No	<u>NIOSH</u>	Yes	<u>ACGIH</u>	No
Dieldrin	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	No	<u>NIOSH</u>	Yes	<u>ACGIH</u>	No
4,4'-DDE	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	Yes	<u>NIOSH</u>	No	<u>ACGIH</u>	No

SECTION 12 - ECOLOGICAL INFORMATION

Ecotoxicity: Not Available
 Environmental Fate: Not Available

SECTION 13 - DISPOSAL CONSIDERATIONS

Disposal: Dispose in accordance with Federal, State and Local regulations.

SECTION 14 - TRANSPORTATION INFORMATION

For the solvent: Toluene

UN Number: UN1294
 Class: 3
 Packing Group: II
 Proper Shipping Name: Toluene

SECTION 15 - REGULATORY INFORMATION

For the solvent: Toluene

European Labeling in Accordance with EC Directives

Hazard Symbols: F, Xn

Risk Phrases:

-R11: Highly Flammable.
 -R20: Harmful by inhalation.

Safety Phrases:

-S16: Keep away from sources of ignition - No smoking.
 -S25: Avoid contact with the eyes.
 -S29: Do not empty into drains.
 -S33: Take precautionary measures against static discharges.

SECTION 16 - OTHER INFORMATION

The above information is believed to be correct on the date it was last revised and must not be considered all inclusive. The information has been obtained only by a search of available literature and is only a guide for handling the chemicals. OSHA regulations require that if other hazards become evident, an upgraded MSDS must be made available to the employee within three months. RESPONSIBILITY for updates lies with the employer and not with CHEM SERVICE, Inc.

Persons not specifically and properly trained should not handle this chemical or its container. This product is furnished FOR LABORATORY USE ONLY! Our products may NOT BE USED as drugs, cosmetics, agricultural or pesticide products, food additives or as household chemicals.

This Material Safety Data Sheet (MSDS) is intended only for use with Chem Service, Inc. products and should not be relied on for use with materials from any other supplier even if the chemical name(s) on the product are identical! Whenever using an MSDS for a solution or mixture the user should refer to the MSDS for every component of the solution or mixture. Chem Service warrants that this MSDS is based upon the most current information available to Chem Service at the time it was last revised. THIS WARRANTY IS EXCLUSIVE, AND CHEM SERVICE, INC. MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. This MSDS is provided gratis and CHEM SERVICE, INC. SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR CONTINGENT DAMAGES.

Copyright © 2011 Chem Service, Inc. All rights reserved except that this MSDS may be printed for the use of a customer or prospective customer of Chem Service, Inc provided the entire MSDS is printed. The MSDS may not be placed in any database or otherwise stored or distributed in electronic or any other form.

This product is furnished FOR LABORATORY USE ONLY!

Safety data for dibenz(a,h)anthracene



[Glossary](#) of terms on this data sheet.

The information on this web page is provided to help you to work safely, but it is intended to be an overview of hazards, not a replacement for a full Material Safety Data Sheet (MSDS). MSDS forms can be downloaded from the web sites of many chemical suppliers.

General

Synonyms: 1,2:5,6-benzanthracene, 1,2:5,6-dibenzanthracene, dibenzo(a,h)anthracene, DBA, 1,2,5,6-DBA

Use: a common pollutant in smoke and used oils

Molecular formula: C₂₂H₁₄

CAS No: 53-70-3

EINECS No: 200-181-8

Annex I Index. No: 601-041-00-2

Physical data

Appearance: white to light yellow crystalline solid

Melting point: 266 - 267 C

Boiling point: 524 C

Vapour density:

Vapour pressure:

Density (g cm⁻³): 1.28

Flash point:

Explosion limits:

Autoignition temperature:

Water solubility:

Stability

Stable. Combustible. Incompatible with strong oxidizing agents.

Toxicology

Harmful if swallowed or inhaled. Experimental carcinogen, tumorigen and neoplastigen. IARC probable human carcinogen.

Toxicity data

(The meaning of any toxicological abbreviations which appear in this section is given [here.](#))

IVN-MUS LDLO 10 mg kg⁻¹

Risk phrases

(The meaning of any risk phrases which appear in this section is given [here.](#))

R45 R50 R53.

Environmental information

Harmful in the environment - may cause long-term damage.

Transport information

(The meaning of any UN hazard codes which appear in this section is given [here.](#))

Non-hazardous for air, sea and road freight.

Personal protection

Safety glasses, gloves, good ventilation. Handle as a possible carcinogen.

Safety phrases

(The meaning of any safety phrases which appear in this section is given [here.](#))

S45 S53 S60 S61.

[Return to [Physical & Theoretical Chemistry Lab. Safety home page.](#)]

This information was last updated on October 8, 2006. We have tried to make it as accurate and useful as possible, but can take no responsibility for its use, misuse, or accuracy. We have not verified this information, and cannot guarantee that it is up-to-date. *Note also that the information on the PTCL Safety web site, where this page was hosted, has been copied onto many other sites, often without permission. If you have any doubts about the veracity of the information that you are viewing, or have any queries, please check the URL that your web browser displays for this page. If the URL begins "http://msds.chem.ox.ac.uk/" the page is maintained by the Safety Officer in Physical Chemistry at Oxford University. If not, this page is a copy made by some other person and we have no responsibility for it.*

SAFETY DATA SHEET

Version 3.7
Revision Date 11/25/2014
Print Date 01/29/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Dibenzofuran

Product Number : 236373
Brand : Aldrich

CAS-No. : 132-64-9

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H302

Harmful if swallowed.

H411

Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P264

Wash skin thoroughly after handling.

P270

Do not eat, drink or smoke when using this product.

P273

Avoid release to the environment.

P301 + P312 + P330

IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell. Rinse mouth.

P391

Collect spillage.

P501

Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : Diphenylene oxide

Formula : C₁₂H₈O

Molecular weight : 168.19 g/mol

CAS-No. : 132-64-9

EC-No. : 205-071-3

Hazardous components

Component	Classification	Concentration
Dibenzofuran		
	Acute Tox. 4; Aquatic Acute 2; Aquatic Chronic 2; H302, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an

industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: crystalline
Colour: white, beige |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 80 - 82 °C (176 - 180 °F) - lit. |
| f) Initial boiling point and boiling range | 154 - 155 °C (309 - 311 °F) at 27 hPa (20 mmHg) - lit. |
| g) Flash point | 130.0 °C (266.0 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | No data available |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | log Pow: 3.77 |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

The preceding data, or interpretation of data, was determined using Quantitative Structure Activity Relationship (QSAR) modeling.

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: HP4430000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish NOEC - Cyprinodon variegatus (sheepshead minnow) - 1 mg/l - 96.0 h
LC50 - Pimephales promelas (fathead minnow) - 1.05 mg/l - 96.0 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Dibenzofuran)
Reportable Quantity (RQ): 100 lbs
Marine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Dibenzofuran)
Marine pollutant:yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Dibenzofuran)

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:
CAS-No. Revision Date

Dibenzofuran 132-64-9 2007-07-01

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Dibenzofuran	132-64-9	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Dibenzofuran	132-64-9	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Dibenzofuran	132-64-9	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H302	Harmful if swallowed.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	
Flammability:	1
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	1
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.7

Revision Date: 11/25/2014

Print Date: 01/29/2016

SAFETY DATA SHEET

Halocarbon R-12 (Dichlorodifluoromethane)

Section 1. Identification


GHS product identifier	: Halocarbon R-12 (Dichlorodifluoromethane)
Chemical name	: dichlorodifluoromethane
Other means of identification	: ASPEN R-12, Methane, dichlorodifluoro-; Refrigerant 12; Propellant 12; Halon 122; Genetron 12; Freon 12; Fluorocarbon 12; Difluorodichloromethane; DICHLORODIFLUOROMETHANE (FC 12); CFC-12
Product use	: Synthetic/Analytical chemistry.
Synonym	: ASPEN R-12, Methane, dichlorodifluoro-; Refrigerant 12; Propellant 12; Halon 122; Genetron 12; Freon 12; Fluorocarbon 12; Difluorodichloromethane; DICHLORODIFLUOROMETHANE (FC 12); CFC-12
SDS #	: 001018
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253
Emergency telephone number (with hours of operation)	: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	: GASES UNDER PRESSURE - Liquefied gas HAZARDOUS TO THE OZONE LAYER - Category 1

GHS label elements

Hazard pictograms



Signal word

: Warning

Hazard statements

: Contains gas under pressure; may explode if heated.
May cause frostbite.
May displace oxygen and cause rapid suffocation.
Harms public health and the environment by destroying ozone in the upper atmosphere.

Precautionary statements

General

: Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction. Always keep container in upright position.

Prevention

: Use and store only outdoors or in a well ventilated place.

Response

: Not applicable.

Storage

: Protect from sunlight. Protect from sunlight when ambient temperature exceeds 52°C/125°F. Store in a well-ventilated place.

Disposal

: Refer to manufacturer/supplier for information on recovery/recycling.

Date of issue/Date of revision : 5/21/2015. **Date of previous issue** : 5/21/2015. **Version** : 2 1/13

Section 2. Hazards identification

Hazards not otherwise classified : Liquid can cause burns similar to frostbite.

Section 3. Composition/information on ingredients

Substance/mixture : Substance

Chemical name : dichlorodifluoromethane

Other means of identification : ASPEN R-12, Methane, dichlorodifluoro-; Refrigerant 12; Propellant 12; Halon 122; Genetron 12; Freon 12; Fluorocarbon 12; Difluorodichloromethane; DICHLORODIFLUOROMETHANE (FC 12); CFC-12

CAS number/other identifiers

CAS number : 75-71-8

Product code : 001018

Ingredient name	%	CAS number
Methane, dichlorodifluoro-	100	75-71-8

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur. In case of contact with liquid, warm frozen tissues slowly with lukewarm water and get medical attention. Do not rub affected area. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical attention if adverse health effects persist or are severe. Ingestion of liquid can cause burns similar to frostbite. If frostbite occurs, get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. As this product rapidly becomes a gas when released, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : Liquid can cause burns similar to frostbite.

Inhalation : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.

Date of issue/Date of revision

: 5/21/2015.

Date of previous issue

: 5/21/2015.

Version : 2

2/13

Section 4. First aid measures

- Skin contact** : Dermal contact with rapidly evaporating liquid could result in freezing of the tissues or frostbite.
- Frostbite** : Try to warm up the frozen tissues and seek medical attention.
- Ingestion** : Ingestion of liquid can cause burns similar to frostbite.
- Over-exposure signs/symptoms**
- Eye contact** : Adverse symptoms may include the following:
frostbite
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
frostbite
- Ingestion** : Adverse symptoms may include the following:
frostbite

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Contains gas under pressure. In a fire or if heated, a pressure increase will occur and the container may burst or explode.
- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
halogenated compounds
carbonyl halides

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode. For incidents involving large quantities, thermally insulated undergarments and thick textile or leather gloves should be worn.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air). May be harmful to the environment if released in large quantities.

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Do not get in eyes or on skin or clothing. Avoid breathing gas. Avoid release to the environment. Refer to special instructions/safety data sheet. Empty containers retain product residue and can be hazardous. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Keep container tightly closed and sealed until ready for use. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F).

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Section 8. Exposure controls/personal protection

Ingredient name	Exposure limits
Methane, dichlorodifluoro-	<p>ACGIH TLV (United States, 3/2012). TWA: 4950 mg/m³ 8 hours. TWA: 1000 ppm 8 hours.</p> <p>NIOSH REL (United States, 1/2013). TWA: 4950 mg/m³ 10 hours. TWA: 1000 ppm 10 hours.</p> <p>OSHA PEL (United States, 6/2010). TWA: 4950 mg/m³ 8 hours. TWA: 1000 ppm 8 hours.</p> <p>OSHA PEL 1989 (United States, 3/1989). TWA: 4950 mg/m³ 8 hours. TWA: 1000 ppm 8 hours.</p>

Appropriate engineering controls : Good general ventilation should be sufficient to control worker exposure to airborne contaminants.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. If contact with the liquid is possible, insulated gloves suitable for low temperatures should be worn. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

Physical state	: Gas. [Liquefied gas]
Color	: Colorless.
Molecular weight	: 120.91 g/mole
Molecular formula	: C-Cl ₂ -F ₂
Boiling/condensation point	: -29.8°C (-21.6°F)
Melting/freezing point	: -158°C (-252.4°F)
Critical temperature	: 111.85°C (233.3°F)
Odor	: Characteristic.
Odor threshold	: Not available.
pH	: Not available.
Flash point	: [Product does not sustain combustion.]
Burning time	: Not applicable.
Burning rate	: Not applicable.
Evaporation rate	: Not available.
Flammability (solid, gas)	: Not available.
Lower and upper explosive (flammable) limits	: Not available.
Vapor pressure	: 84.9 (psia)
Vapor density	: 4.2 (Air = 1)
Specific Volume (ft³/lb)	: 3.1746
Gas Density (lb/ft³)	: 0.315
Relative density	: Not applicable.
Solubility	: Not available.
Solubility in water	: 0.3 g/l
Partition coefficient: n-octanol/water	: 2.16
Auto-ignition temperature	: Not available.
Decomposition temperature	: Not available.
SADT	: Not available.
Viscosity	: Not applicable.

Section 10. Stability and reactivity

Reactivity	: No specific test data related to reactivity available for this product or its ingredients.
Chemical stability	: The product is stable.
Possibility of hazardous reactions	: Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid	: No specific data.
Hazardous decomposition products	: Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 10. Stability and reactivity

Hazardous polymerization : Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Liquid can cause burns similar to frostbite.
- Inhalation** : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.
- Skin contact** : Dermal contact with rapidly evaporating liquid could result in freezing of the tissues or frostbite.
- Ingestion** : Ingestion of liquid can cause burns similar to frostbite.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
frostbite
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
frostbite

Section 11. Toxicological information

Ingestion : Adverse symptoms may include the following:
frostbite

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Methane, dichlorodifluoro-	2.16	6.17	low

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.






Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

United States - RCRA Toxic hazardous waste "U" List

Ingredient	CAS #	Status	Reference number
Dichlorodifluoromethane; Methane, dichlorodifluoro-	75-71-8	Listed	U075

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1028	UN1028	UN1028	UN1028	UN1028
UN proper shipping name	DICHLORODIFLUOROMETHANE OR REFRIGERANT GAS R 12	DICHLORODIFLUOROMETHANE; OR REFRIGERANT GAS R 12	DICHLORODIFLUOROMETHANE OR REFRIGERANT GAS R 12	DICHLORODIFLUOROMETHANE (REFRIGERANT GAS R 12)	DICHLORODIFLUOROMETHANE
Transport hazard class(es)	2.2 	2.2 	2.2 	2.2 	2.2 
Packing group	-	-	-	-	-
Environment	No.	No.	No.	No.	No.
Additional information	<p>Reportable quantity 5000 lbs / 2270 kg Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements.</p> <p>Limited quantity Yes.</p> <p>Packaging instruction Passenger aircraft Quantity limitation: 75 kg</p> <p>Cargo aircraft Quantity limitation: 150 kg</p> <p>Special provisions T50</p>	<p>Explosive Limit and Limited Quantity Index 0.125</p> <p>Passenger Carrying Road or Rail Index 75</p>	-	-	<p>Passenger and Cargo Aircraft Quantity limitation: 75 kg Cargo Aircraft Only Quantity limitation: 150 kg</p>

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Section 14. Transport information

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
TSCA 12(b) annual export notification: dichlorodifluoromethane
United States inventory (TSCA 8b): This material is listed or exempted.

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Sudden release of pressure

Composition/information on ingredients

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
Methane, dichlorodifluoro-	100	No.	Yes.	No.	No.	No.

SARA 313

	Product name	CAS number	%
Form R - Reporting requirements	dichlorodifluoromethane	75-71-8	100
Supplier notification	dichlorodifluoromethane	75-71-8	100

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : This material is listed.

New York : This material is listed.

Section 15. Regulatory information

- New Jersey** : This material is listed.
- Pennsylvania** : This material is listed.
- Canada inventory** : This material is listed or exempted.
- International regulations**
 - International lists** :
 - Australia inventory (AICS)**: This material is listed or exempted.
 - China inventory (IECSC)**: This material is listed or exempted.
 - Japan inventory**: This material is listed or exempted.
 - Korea inventory**: This material is listed or exempted.
 - Malaysia Inventory (EHS Register)**: Not determined.
 - New Zealand Inventory of Chemicals (NZIoC)**: This material is listed or exempted.
 - Philippines inventory (PICCS)**: This material is listed or exempted.
 - Taiwan inventory (CSNN)**: Not determined.
 - Chemical Weapons Convention List Schedule I Chemicals** : Not listed
 - Chemical Weapons Convention List Schedule II Chemicals** : Not listed
 - Chemical Weapons Convention List Schedule III Chemicals** : Not listed
- Canada**
 - WHMIS (Canada)** : Class A: Compressed gas.
 - CEPA Toxic substances**: This material is listed.
 - Canadian ARET**: This material is not listed.
 - Canadian NPRI**: This material is listed.
 - Alberta Designated Substances**: This material is not listed.
 - Ontario Designated Substances**: This material is not listed.
 - Quebec Designated Substances**: This material is not listed.

Section 16. Other information

- Canada Label requirements** : Class A: Compressed gas.
- Hazardous Material Information System (U.S.A.)**

Health	1
Flammability	0
Physical hazards	2

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Section 16. Other information

Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

History

Date of printing : 5/21/2015.

Date of issue/Date of revision : 5/21/2015.

Date of previous issue : 5/21/2015.

Version : 2

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations
- ACGIH – American Conference of Governmental Industrial Hygienists
- AIHA – American Industrial Hygiene Association
- CAS – Chemical Abstract Services
- CEPA – Canadian Environmental Protection Act
- CERCLA – Comprehensive Environmental Response, Compensation, and Liability Act (EPA)
- CFR – United States Code of Federal Regulations
- CPR – Controlled Products Regulations
- DSL – Domestic Substances List
- GWP – Global Warming Potential
- IARC – International Agency for Research on Cancer
- ICAO – International Civil Aviation Organisation
- Inh – Inhalation
- LC – Lethal concentration
- LD – Lethal dosage
- NDSL – Non-Domestic Substances List
- NIOSH – National Institute for Occupational Safety and Health
- TDG – Canadian Transportation of Dangerous Goods Act and Regulations
- TLV – Threshold Limit Value
- TSCA – Toxic Substances Control Act
- WEEL – Workplace Environmental Exposure Level
- WHMIS – Canadian Workplace Hazardous Material Information System

References : Not available.

▣ Indicates information that has changed from previously issued version.

Other special considerations : WARNING: Contains (Dichlorodifluoromethane), a substance which harms the public health and environment by destroying ozone in the upper atmosphere.

Notice to reader

Section 16. Other information

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SECTION 1: CHEMICAL PRODUCT and COMPANY IDENTIFICATION

Product Name: sec-Butylcyclohexane 99%
Product Code: B28290
Supplier: Pfaltz & Bauer, Inc.
172 E. Aurora Street
Waterbury, CT 06708 USA
Phone: 203 574-0075
Fax: 203 574-3181
Emergency Phone: CHEMTREC, US: 1-800-424-9300
CHEMTREC, International: 1-703-527-3887

SECTION 2: HAZARDS IDENTIFICATION

Statements of Hazard: Irritant
Acute Health Hazard: Irritant to eyes, skin, mucous membranes and respiratory system. May be harmful by ingestion, inhalation or skin absorption.
Chronic Health Hazard: Not Available
HMIS Rating: H:1 F:2 P:0
NFPA Rating: H:1 F:2 R:0

To the best of our knowledge, the toxicological properties of this chemical have not been thoroughly investigated. Use appropriate procedures and precautions to prevent or minimize exposure.



Pictogram:
Signal Word: Warning
Hazard Statement(s): **H302** Harmful if swallowed.
H312 Harmful in contact with skin.
H315 Causes skin irritation.
H319 Causes serious eye irritation.
H332 Harmful if inhaled.
H335 May cause respiratory irritation.
Precautionary Statement(s): **P261** Avoid breathing dust/ fume/ gas/ mist/ vapors/ spray.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

P301+P312 IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell.

P302+P352 IF ON SKIN: Wash with plenty of soap and water.

P304+P340 IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.

P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P332+P313 If skin irritation occurs: Get medical advice/ attention.

SECTION 3: COMPOSITION/INFORMATION on INGREDIENTS

<u>Chemical Name:</u>	sec-Butylcyclohexane
<u>Synonyms:</u>	Not Available
<u>CAS Number:</u>	7058-01-7
<u>MDL Number:</u>	MFCD00019369
<u>EINECS Number:</u>	230-342-8
<u>Beilstein Registry Number:</u>	1900609
<u>Molecular Formula:</u>	C ₁₀ H ₂₀
<u>Molecular Weight:</u>	140.27
<u>Content:</u>	99%
<u>Notes:</u>	Not Available

SECTION 4: FIRST AID MEASURES

Eye Contact: Flush eyes with large amounts of water for fifteen minutes. Separate eyelids with fingers. If irritation persists, seek medical attention.

Skin Contact: Wash skin with soap and water. If irritation persists, seek medical attention.

Ingestion: Do not induce vomiting. Seek medical attention.

Inhalation: Move to a fresh air environment. Contact a physician if breathing becomes difficult.

SECTION 5: FIRE FIGHTING MEASURES

Flash Point: 48 °C

Explosion Limits: Lower: Not Available
Upper: Not Available

Auto Ignition Temperature: Not Available

Extinguishing Media: Carbon dioxide, dry chemical powder, alcohol-resistant foam or water spray.

Protective Equipment: Wear self-contained respirator and fully protective impervious suit.

Specific Hazards: May emit hazardous fumes under fire conditions.

SECTION 6: ACCIDENTAL RELEASE MEASURES

Personal Protection: Wear a self-contained breathing apparatus, rubber boots and gloves, and disposable coveralls. Dispose of coveralls after use. Keep unprotected persons away.

Environmental Protection: Keep spills out of sewers and bodies of water. Dike and contain the spill with inert material. Absorb on sand, vermiculite or diatomite. Transfer material to a container for disposal or recovery. Ventilate area and wash spill site after material pickup is complete.

SECTION 7: HANDLING and STORAGE

Handling: Avoid breathing dust, vapor, mist or gas. Avoid contact with skin and eyes. Avoid prolonged or repeated exposure. Use only in a chemical fume hood. Open and handle container with care. Keep ignition sources away.

Storage: Store in a tightly closed container in a dry, well-ventilated place.

Sensitivities: Not Available

Storage Temperature: 15 – 30 °C

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

Eyes: Wear appropriate protective eyeglass or chemical safety goggles. Make sure that there is an eyewash facility in your vicinity.

Skin: Wear impervious gloves and protective clothing.

Respiratory: Use a NIOSH approved respirator when exposure limits are exceeded or if irritation or other symptoms are experienced.

Exposure Limits:

<u>Country</u>	<u>Source</u>	<u>Type</u>	<u>Value</u>
USA	ACGIH	TWA	Not Available

USA	OSHA	STEL	Not Available
USA	OSHA	PEL	Not Available

SECTION 9: PHYSICAL and CHEMICAL PROPERTIES

<u>Appearance:</u>	Liquid
<u>Odor:</u>	Not Available
<u>Melting Point:</u>	-110 °C
<u>Boiling Point:</u>	179.3 °C
<u>pH Value:</u>	Not Available
<u>Density:</u>	0.801 g/cm ³
<u>Refractive Index, n²⁰_D:</u>	1.4467
<u>Viscosity:</u>	Not Available
<u>Solubility in Water:</u>	Not Available
<u>Vapor Pressure:</u>	Not Available
<u>Vapor Density(Air=1):</u>	Not Available

SECTION 10: STABILITY and REACTIVITY

<u>Stability:</u>	Stable under normal temperatures and pressures.
<u>Incompatibility:</u>	Strong oxidizing agents.
<u>Conditions to Avoid:</u>	Heat, Flame, Sparks, other ignition sources
<u>Hazardous Decomposition Products:</u>	Carbon oxides

SECTION 11: TOXICOLOGICAL INFORMATION

<u>RTECS Reference:</u>	Not Available
<u>Target Organs:</u>	Not Available
<u>Toxicity Data:</u>	Not Available
<u>Skin corrosion/irritation:</u>	Not Available
<u>Serious eye damage/irritation:</u>	Not Available
<u>Carcinogenicity:</u>	Not Available

SECTION 12: ECOLOGICAL INFORMATION

<u>Toxicity:</u>	No Available
<u>Persistence and degradability:</u>	Not Available
<u>Bioaccumulative potential:</u>	Not Available
<u>Mobility in soil:</u>	Not Available

PBT and vPvB assessment: Not Available
Other adverse effects: Not Available

SECTION 13: DISPOSAL CONSIDERATIONS

Contact a licensed professional waste disposal service. Dispose in a manner consistent with federal, state and local environmental regulations.

SECTION 14: TRANSPORT INFORMATION

DOT Shipping Name: Hydrocarbons, Liquid, N.O.S.

DOT UN Number: UN3295

DOT Hazard Class: Class 3

DOT Packing Group: III

IMDG Shipping Name: Hydrocarbons, Liquid, N.O.S.

IMDG UN Number: UN3295

IMDG Hazard Class: Class 3

IMDG Packing Group: III

IATA Shipping Name: Hydrocarbons, Liquid, N.O.S.

IATA UN Number: UN3295

IATA Hazard Class: Class 3

IATA Packing Group: III

SECTION 15: REGULATORY INFORMATION

United States:

Toxic Substance Control Act (TSCA): Not listed

Superfund Amendments and Reauthorization Act (SARA 302): Not Available

Superfund Amendments and Reauthorization Act (SARA 311/312): Not Available

Superfund Amendments and Reauthorization Act (SARA 313): Not Available

European Union:

European Inventory of Existing Chemical Substances (EINECS): No. 230-342-8

Hazard Codes: Not Available

Risk Statements: Not Available

Safety Statements: Not Available

Canada

Canadian Domestic Substances List (DSL): Not listed

Canadian Domestic Substances List (NDSL): Not listed

SECTION 16: OTHER INFORMATION

Date Prepared: 01/04/2013 MH

The information above is presented in good faith. It is believed to be accurate and represents the best information currently available to us. However we make no warranty with respect to such information and we assume no liability resulting from its use. The user should consider this information as a supplement to other information that may be available and make independent judgment to ensure proper use to protect the health and safety of employees and the environment. Pfaltz and Bauer shall not be held liable for any damage resulting from handling or from contact with the above product.

Chem Service Inc. Material Safety Data Sheet

Last Revised On: 11/3/2011

SECTION 1 - CHEMICAL PRODUCT and COMPANY IDENTIFICATION

Catalog Number: S-10875M1
Description: 4,4'-DDE
Product is: Solution
Other Name(s): 1,1-Dichloro-2,2-bis[p-chlorophenyl]ethylene/p,p'-DDE/1,1
-(Dichloroethenylidene)bis[4-chlorobenzene]
Supplied by CHEM SERVICE, Inc. PO BOX 599, WEST CHESTER, PA 19381 (610)-692-3026
EMERGENCY PHONE: 1-610-692-3026

SECTION 2 - COMPOSITION, INFORMATION ON INGREDIENTS

CAS No.: 72-55-9
Description: 4,4'-DDE Solution
Concentration: 100ug/mL in Methanol
EINECS No.: 200-784-6
Hazard Symbols: XN

SECTION 3 - HAZARDS IDENTIFICATION

Contact lenses should not be worn in the laboratory. All chemicals should be considered hazardous - Avoid direct physical contact!

For the solvent: Methanol

Health Risks: May be fatal if absorbed through the skin! Repeated exposure to vapors and/or dust can cause eye injury. May be fatal if inhaled! Can cause cardiovascular system injury. Exposure can cause liver damage. Exposure can cause kidney damage. May be fatal or cause blindness if swallowed. Can cause gastro-intestinal disturbances. Can cause convulsions.

Property 65: Data Not Available

SECTION 4 - FIRST AID MEASURES

An antidote is a substance intended to counteract the effect of a poison. It should be administered only by a physician or trained emergency personnel. Medical advice can be obtained from a POISON CONTROL CENTER.

For the solvent: Methanol

First Aid: In case of contact: Flush eyes continuously with water for 15-20 minutes. Flush skin with water for 15-20 minutes. If patient has stopped breathing administer artificial respiration. If patient is in cardiac arrest administer CPR. Continue life supporting measures until medical assistance has arrived. Do not wear shoes or clothing until absolutely free of all chemical odors. Get medical attention if necessary. If no burns have occurred-use soap and water to cleanse skin. If inhaled remove patient to fresh air. Administer oxygen if patient is having difficulty breathing. If swallowed do not induce vomiting.

SECTION 5 - FIRE AND EXPLOSION DATA

For the solvent: Methanol

Flash Point: 11°C This is a flammable chemical.

Extinguishing Media: Carbon dioxide or dry chemical powder. DO NOT USE WATER!

Upper Explosion Limit: 36%

Lower Explosion Limit: 6.0%

Autoignition Temperature: 464°C

NFPA Scale: 0 - Least, 1 - Slight, 2 - Moderate, 3 - High, 4 - Severe

NFPA Hazard Rating: Health: 1. Reactivity: 0. Flammability: 3. Special: No Data.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Spills or Leaks: Evacuate area. Wear appropriate OSHA regulated equipment. Ventilate area.

Absorb on vermiculite or similar material. Sweep up and place in an appropriate container.

Hold for disposal.

Wash contaminated surfaces to remove any residue.

Remove contaminated clothing and wash before reuse.

SECTION 7 - HANDLING AND STORAGE

Handling: This chemical should be handled only in a hood. Eye shields should be worn.

Use appropriate OSHA/MSHA approved safety equipment. Avoid contact with skin, eyes and clothing. Avoid ingestion and inhalation. Wash thoroughly after handling.

Storage:

Store in a cool dry place. Store only with compatible chemicals.

Keep tightly closed.

SECTION 8 - EXPOSURE CONTROLS/PERSONAL PROTECTION

For the solvent: Methanol

OSHA PEL (TWA): 200 ppm (260 mg/m³)

ACGIH TLV (TWA): 200 ppm (262 mg/m³)

ACGIH TLV (STEL): Data Not Available

Personal Protective Equipment

Eyes: Wear Safety Glasses.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to minimize contact with skin.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 requirements must be followed whenever workplace conditions warrant a respirators use.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

For the solvent: Methanol

Color: Colorless

Phase: Liquid

Melting Point: -98°C

Boiling Point: 64.6°C

Specific Gravity: 0.791g/mL

Vapor Density: 1.11

Vapor Pressure: 130.3 hPa @ 20°C

Solubility in Water: Completely miscible.

Odor: Data Not Available

Evaporation Rate (Butyl acetate=1): Data Not Available

Molecular Weight: 32.05
Molecular Formula: CH4O

SECTION 10 - STABILITY AND REACTIVITY

For the solvent: Methanol

Reacts with Acid halides and anhydrides. Flammable. Incompatible with strong acids. Incompatible with strong reducing agents. Incompatible with strong oxidizing agents. Decomposition liberates toxic fumes. Hygroscopic. Incompatible with active metals (e.g. Sodium).

SECTION 11 - TOXICOLOGY INFORMATION

The primary hazards for this solution are predominantly from the solvent.

For the solvent: Methanol

RTECS: PC1400000

Oral Rat or Mouse LD50: 5628 mg/kg

Dermal Rat or Mouse LD50: N/A mg/kg

Rat or Mouse LC50 : 64000 ppm/8H

Carcinogenicity

OSHA: NO

IARC: NO

NTP: NO

ACGIH: NO

NIOSH: NO

Other: NO

Property 65: Data Not Available

SECTION 12 - ECOLOGICAL INFORMATION

Ecotoxicity: Not Available

Environmental Fate: Not Available

SECTION 13 - DISPOSAL CONSIDERATIONS

Disposal: Dispose in accordance with Federal, State and Local regulations.

SECTION 14 - TRANSPORTATION INFORMATION

For the solvent: Methanol

UN Number: UN1230

Class: 3

Packing Group: II

Proper Shipping Name: Methanol

SECTION 15 - REGULATORY INFORMATION

For the solvent: Methanol

European Labeling in Accordance with EC Directives

Hazard Symbols: T F

Risk Phrases

R11 Highly Flammable.

R23/25 Toxic by inhalation and if swallowed.

Safety Phrases

S16 Keep away from sources of ignition- No smoking.

S2 Keep out of reach of children.

- S24 Avoid contact with the skin.
S45 In case of accident or if you feel unwell, seek medical advice immediately (show label where possible).
S7 Keep container tightly closed

SECTION 16 - OTHER INFORMATION

The above information is believed to be correct on the date it was last revised and must not be considered all inclusive. The information has been obtained only by a search of available literature and is only a guide for handling the chemicals. OSHA regulations require that if other hazards become evident, an upgraded MSDS must be made available to the employee within three months. RESPONSIBILITY for updates lies with the employer and not with CHEM SERVICE, Inc.

Persons not specifically and properly trained should not handle this chemical or its container. This product is furnished FOR LABORATORY USE ONLY! Our products may NOT BE USED as drugs, cosmetics, agricultural or pesticide products, food additives or as household chemicals.

This Material Safety Data Sheet (MSDS) is intended only for use with Chem Service, Inc. products and should not be relied on for use with materials from any other supplier even if the chemical name(s) on the product are identical! Whenever using an MSDS for a solution or mixture the user should refer to the MSDS for every component of the solution or mixture. Chem Service warrants that this MSDS is based upon the most current information available to Chem Service at the time it was last revised. THIS WARRANTY IS EXCLUSIVE, AND CHEM SERVICE, INC. MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. This MSDS is provided gratis and CHEM SERVICE, INC. SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR CONTINGENT DAMAGES. Copyright © 2011 Chem Service, Inc. All rights reserved except that this MSDS may be printed for the use of a customer or prospective customer of Chem Service, Inc provided the entire MSDS is printed. The MSDS may not be placed in any database or otherwise stored or distributed in electronic or any other form.


This product is furnished FOR LABORATORY USE ONLY!

Safety Data Sheets (SDS)

SECTION 1-IDENTIFICATION

Product name: Ethylbenzene
Other names: –
Proper shipping name: Ethylbenzene
Recommended use of the chemical and restrictions on use: The main use of ethylbenzene is to manufacture styrene, a compound used to make plastics. Ethylbenzene is also found in gasoline, paints, inks, insecticides, carpet glues and tobacco products.
Manufacturer/Supplier Name: Taiwan SM Corp., Kaohsiung plant Address: NO.7, Industrial 1st Rd, Lin-Yuan Kaohsiung County 83203, Taiwan, R.O.C. Phone No.: 886-7-6414511
Emergency phone No./Fax No.: 886-7-6414511 Ext. 221 (on duty), 886-7-6414517 (off duty)/886-7-6423828

SECTION 2-HAZARDS IDENTIFICATION

GHS Classification: Flammable Liquid Category 2 Acute Toxicity (Inhalation) Category 4 Skin Corrosion/Irritation Category 3 Serious Eye Damage/Eye Irritation Category 2 Carcinogenicity Category 2 Reproductive Toxicity Category 2 Specific Target Organ Toxicity Repeated Exposure Category 2 Aspiration Hazard Category 1
GHS Label elements: Hazard symbols 
Signal word Danger
Hazard statements Flammable liquid and vapor Harmful if inhaled Causes skin irritation Causes serious eye irritation Suspected of causing cancer May damage the unborn child May be harmful to organs by prolonged and repeated exposure May be fatal if swallowed and enters airways
Precautionary statements Use only in well ventilated area. Control of exposure by mechanical ventilation in an unventilated or confined space Avoid breathing vapors and contact with skin and eyes. Wear breathing apparatus/protective gloves/face protection. Store in well-ventilated place. Disposal must be in accordance with applicable federal, state, or local regulations.
Other hazards: –

SECTION 3-COMPOSITION/INFORMATION ON INGREDIENTS

CAS No.	Chemical Name	wt% by weight	EINECS No.
00100-41-4	Ethylbenzene	99.0 min.	202-849-4
Synonyms	Phenylethane · EB · Ethylbenzol		

SECTION 4-FIRST AID MEASURES

Description of necessary first aid measures

Eye:

1. Flush eye with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids.
2. Get medical aid immediately.

Skin:

1. Washing affected area thoroughly with soap and water for at least 20 minutes.
2. Call a Physician if irritation develops or persists.
3. Removing contaminated clothing, shoes, and leathery wearings, cleaning procedure is available before reused or waste treatment.

Ingestion:

1. If victim is conscious and alert, give 2~4 cupfuls of milk/water to dilute the substance in stomach.
2. Never give anything by mouth to an unconscious person.
3. Don't induce vomiting unless directed to do so by medical person.
4. Then seek for medical attention.

Inhalation:

1. Remove from further exposure and flush thoroughly with air.
2. If not breathing, give artificial respiration. If breathing is difficult, give Oxygen.
3. If respiratory irritation, seek immediate medical assistance and call a physician.

Most important symptoms/effects, acute and delayed

Headaches, dizziness, fatigue, eye, nose and throat irritation. Target organs: Eyes, upper respiratory system, skin, CNS, lung, liver, kidney, skin (dermatitis), eye (conjunctivitis and other eye injuries), upper respiratory system disorders, and central nervous system disorders.

Indication of immediate medical attention and special treatment needed, if necessary

For acute or short term repeated exposures to Ethylbenzene:

Inhalation:

1. Severe exposures should have cardiac monitoring to detect arrhythmia.
2. If bronchospasm and wheezing occur, consider treatment with inhaled sympathomimetic agents.
3. If pulmonary edema (noncardiogenic) occurs, then maintain ventilation and oxygenation with close arterial blood gas monitoring. Early use of PEEP and mechanical ventilation may be needed to maintain pO₂ greater than 50 mmHG with FIO₂ less than 60%.

Ingestion:

1. Induction of emesis is not recommended.
2. Cautious gastric lavage followed by administration of activated charcoal may be of benefit if the patient is seen soon after the exposure.

SECTION 5-FIRE FIGHTING MEASURES

Extinguishing media

Foam · CO₂ · Dry chemical powder · Water spray or fog – Large fires only.

Specific hazards arising from the chemical

1. Liquid and vapor are flammable.
2. Moderate fire hazard when exposed to heat or flame.
3. Vapor forms an explosive mixture with air.
4. Moderate explosion hazard when exposed to heat or flame.
5. Vapor may travel a considerable distance to source of ignition.
6. Heating may cause expansion or decomposition leading to violent rupture of containers.
7. On combustion, may emit toxic fumes of carbon monoxide (CO).

Special protective equipment and precautions for fire-fighters

1. Must wear MSHA/NOISH approved positive self-contained breathing apparatus (SCBA) and protective clothing.
2. Withdrawing and isolation the possible dangerous sources, fire fighting at safe distance and suitable protection area. Keep toxic vapors and decompositions away from inhalation, when standing at upper-wind area as well.
3. Stop leakage before fire extinguishing, otherwise it may explode again because of vapors above leakage. However, it's not well extinguishment at nondangerous circumstance, preferring to burning up.
4. Water spray may not work effectively in terms of lower flash point. Better fire fighting performed by experienced people.
5. In huge fire at larger area, automatic water spray system should be recommended. If extinguishing is not available, evacuating people back as soon as possible.
6. Out off the space immediately, if vessel collapsed or pressure relief valve went pop.

SECTION 6-ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedure

1. Personal protective equipment (specified in Section 8)
Eyes : Chemical safety goggles are recommended, and a face shield is added when needed.
Skin : Wear appropriate protective gloves to avoid skin contact.
Clothing : When direct contact is likely, Use rubberized clothings, apron and boots.
Respiratory : When limits are exceeded, wear a respirator approved by NIOSH/MSHA for protection against organic dust, mists and vapors.
2. Remove all sources of ignition. No smoking, naked lights or ignition sources. Ventilate area of leak or spill.
3. Keep unnecessary and unprotected personnel from entering. Evacuate personnel from the danger area. Consult with an expert about the emergency procedures.

Environmental precautions

1. Prevent spillage from entering drains, surface, and groundwater.
2. Contain and recover liquid when possible. Use non-sparking tools and equipment.
3. Collect liquid in an appropriate container or absorb with an inert material (e.g. vermiculite, dry sand, earth), and place in a chemical waste container.
4. Report the accidental spill/release to Local/State government.

Methods and materials for containment and cleaning up

Minor spill:

1. Remove all ignition sources.
2. Clean up all spills immediately.
3. Avoid breathing vapors and contact with skin and eyes.
4. Control personal contact by using protective equipment.
5. Contain and absorb small quantities with vermiculite or other absorbent material.
6. Wipe up.
7. Collect residues in a flammable waste container.

Major spill

1. Clear area of personnel and move upwind.
2. Alert emergency responders and tell them location and nature of hazard.
3. May be violently or explosively reactive.
4. Wear breathing apparatus plus protective gloves.
5. Prevent spillage from entering drains or water course.
6. No smoking, naked lights or ignition sources. Increase ventilation.
7. Stop leak if safe to do so.
8. Water spray or fog may be used to disperse/absorb vapor.
9. Contain spill with sand, earth or vermiculite.
10. Use only spark-free shovels and explosion proof equipment.
11. Collect recoverable product into labeled containers for recycling..
12. Absorb remaining product with sand, earth or vermiculite.
13. Collect solid residues and seal in labeled drums for disposal.
14. Wash area and prevent runoff into drains.
15. If contamination of drains or waterways occurs, advise emergency services.

SECTION 7-HANDLING AND STORAGE

Precautions for safe handling

1. Wash thoroughly after handling.
2. Use only in well ventilated area.
3. Ground and bond containers when transferring.
4. Use spark-free tools and explosion proof equipment.
5. Empty containers retain product residue (liquid/vapor), and can be dangerous.
6. Do not pressurize, cut, weld, braze, solder, drill, or expose empty containers to heat, sparks or open flames.

Conditions for safe storage, including any incompatibilities

1. Iron, galvanized iron, and steel are suitable metals for tanks.
2. Storage should be located away from any area subject to fire hazards. Storage tanks located in the open or underground minimize the danger of fire, vapor and health problems.
3. All openings in the system should terminate outdoors and be protected by flash screen.
4. Electrical installation should conform to the National Electrical Code.
5. Storage tanks should be electrically bonded and grounded to prevent dangerous accumulations of static electricity. (see NFPA pamphlet "Static Electricity")
6. Natural ventilation is all that is needed for outdoor storage installation.
7. For indoor storage : Good natural ventilation may be sufficient. The generally considered maximum allowable concentration is 100 ppm by volume in air for an eight-hour working exposure. If other than natural ventilation is required,

the ventilation equipment should be designed to handle the heavy ethylbenzene vapor. Since ethylbenzene vapor is heavier than air, a down draft mechanical exhaust is indicated in those operation in which general ventilation should be to ensure a substantial air flow away from the work area. All ventilating systems require periodic inspection.

SECTION 8-EXPOSURE CONTROLS, PERSONAL PROTECTION

Control parameters

OSHA- Final PELs : 100 ppm TWA.

ACGIH TLV-TEL : 100 ppm.

ACGIH TLV-STEL : 125 ppm.

Taiwan TWA : 100 ppm (skin).

Taiwan STEL : 125 ppm (skin).

Taiwan Ceiling : -----.

Taiwan BEI : 1 mg/l (before on duty).

Engineering control

1. Process should be located at least 17 meter (50 feet) away from open flames and all high temperature operations likely to cause ignition of the ethylbenzene vapor.
2. In venting ethylbenzene vapors, consideration should be given to possible halogenation of the vapors by low concentrations of free chlorine and bromine with the resultant formation of lacrimations.
3. Process should be designed so that the operator is not exposed to direct contact with ethylbenzene or the vapor. The technical problems of designing equipment, providing adequate ventilation and operating procedures which promise maximum security and economy, can best be handled by competent engineers.
4. It is essential for safety that equipment be used and maintained as recommended by the manufacturer.
5. Tanks used to store or process ethylbenzene should be closed vessels vented to a safe point of discharge in the outside atmosphere away from operating stations, roadways, and at least 17 meter (50 feet) from possible sources of ignitions. All sparks, flames, heated surface, or other sources of ignition should be kept away from all vents. It is advisable, to provide suction on vessels when inspection or observation openings are made, to minimize or eliminate escape of vapors.

Personal protective equipment

Personal respirators (NIOSH Approved):

If the exposure limit is exceeded, a half-face organic vapor respirator may be worn for up to ten times the exposure limit or the maximum use concentration specified by the appropriate regulatory agency or respirator supplier, whichever is lowest. A full-face piece organic vapor respirator may be worn up to 50 times the exposure limit or the maximum use concentration specified by the appropriate regulatory agency or respirator supplier, whichever is lowest. For emergencies or instances where the exposure levels are not known, use a full-face piece positive-pressure, air-supplied respirator.

(Warning: Air-purifying respirators do not protect workers in oxygen-deficient atmospheres.)

Skin protection:

Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Eye Protection:

Use chemical safety goggles and/or a full face shield where splashing is possible. Maintain eye wash fountain and quick-drench facilities in work area.

SECTION 9-PHYSICAL AND CHEMICAL PROPERTIES

Appearance : Transparent liquid	Upper/lower explosive limits : 1.0% ~6.7%
Odor: Aromatic odor	Vapor Pressure : 7.1 mmHg @20°C/68°F
Odor threshold : 0.092~0.6 ppm	Vapor Density : 3.66 (air=1)
PH : Not available	Relative density : 0.864 (water=1)
Melting/Freezing Point : -94.9°C	Solubility : 0.015 @25°C in water
Initial boiling point/boiling range : 132.6°C	Partition coefficient : 3.15 (n-octanol/water)
Flash point : 21°C	Auto-ignition temperature : 432°C
Evaporation Rate : 0.84 (BuAc=1)	Decomposition temperature : Not available
Flammability (solid/gas) : Not available	Viscosity : Not available
Molecular Formula : C ₈ H ₁₀	Molecular Weight : 106.7

SECTION 10-STABILITY AND REACTIVITY

Reactivity

The product is stable. Vapor is explosive when exposed to heat or flame.

Chemical stability

Stable under normal temperatures and pressures.

Possibility of hazardous reaction

Has not been reported.

Condition to avoid Incompatible materials, ignition sources, excess heat.
Incompatible materials Oxidizing agents.
Hazardous decomposition products Carbon dioxide and carbon monoxide may form when heated to decomposition.

SECTION 11-TOXICOLOGICAL INFORMATION

<p>Routes of exposure Eye, Skin, inhalation, Ingestion.</p> <p>Symptoms (treatments as indicated in Section 4) Eye: May cause irritation, redness, pain, and corneal damage.</p> <p>Skin: Causes irritation to skin. Symptoms include redness, itching, and pain. May produce blisters. May be absorbed through the skin.</p> <p>Ingestion: May cause irritation to the gastrointestinal tract. Symptoms may include nausea, vomiting and diarrhea. May cause central nervous system depression. Symptoms may include giddiness, headache, dizziness, nausea, anaesthetic effects, slowed reaction time, slurred speech and may progress to unconsciousness. Serious poisonings may result in respiratory depression and may be fatal.</p> <p>Inhalation: Inhalation of high concentrations of gas/vapor causes lung irritation with coughing and nausea, central nervous depression with headache and dizziness, slowing of reflexes, fatigue and inco-ordination. Central nervous system (CNS) depression may include general discomfort, symptoms of giddiness, headache, dizziness, nausea, anaesthetic effects, slowed reaction time, slurred speech and may progress to unconsciousness. Serious poisonings may result in respiratory depression and may be fatal. If exposure to highly concentrated solvent atmosphere is prolonged this may lead to narcosis, unconsciousness, even coma and possible death.</p> <p>Chronic exposure: There has been some concern that this material can cause cancer or mutations but there is not enough data to make an assessment. Limited evidence suggests that repeated or long-term occupational exposure may produce cumulative health effects involving organs or biochemical systems. Chronic solvent inhalation exposures may result in nervous system impairment and liver and blood changes.</p> <p>Aggravation of pre-existing conditions: Persons with pre-existing skin disorders, eye problems, liver disease, central nervous system disorders, or impaired respiratory function may be more susceptible to the effects of the substance.</p>
<p>Toxicity LD50: 3500 mg/kg (rat, oral) LC50: 4000 ppm/4h (rat, inhalation)</p> <p>Irritation Skin (rabbit): 15 mg/24h Mild Eye (rabbit): 500 mg- SEVERE</p>
<p>Chronic effect Carcinogenicity: ACGIH : A3- Proven for animals. OSHA : Classified None. IARC : Group 2B carcinogen.</p> <p>Epidemiology: Not available.</p> <p>Teratogenicity: Not available.</p> <p>Reproductive Effects: Not available.</p>

Neurotoxicity: Not available
Mutagenicity: Mutation in mammalian somatic cells (Rodent, mouse) Lymphocyte=80mg/L.


SECTION 12-ECOLOGICAL INFORMATION



<p>Ecotoxicity LC₅₀ (96 hr.) Fish: 32.0~97.1 mg/l EC₅₀ (48 hr.) Water flea: Not available Biocentration factor (BCF): Not available</p>
<p>Persistence and degradability</p> <ol style="list-style-type: none"> In the atmosphere, it exists primarily in the vapor phase based on its vapor pressure. It photochemically degrades by reaction with hydroxyl radicals (half-life 0.5 to 2 days) and partially returns to the earth in rain. Degradation occurs faster under smog conditions. Photooxidation products include ethylphenol, benzaldehyde, acetophenone and m- and p- ethylnitrobenzene. In water, ethylbenzene's concentration decreases by evaporation and biodegradation. The rate of decrease is dependent on the season. Half-lives in water range from several days to 2 weeks. Some ethylbenzene is absorbed by sediment, but bioconcentration in fish is not expected to be significant. <p>Half-life (Air): 8.56~85.6 hr Half-life (Surface water): 72~240 hr Half-life (Ground water): 144~5472 hr Half-life (Soil): 7.2~240 hr</p>
<p>Bioaccumulative potential This material is not expected to significantly bioaccumulate.</p>
<p>Mobility in soil Ethylbenzene is adsorbed moderately by soil. It does not significantly hydrolyze in either water or soil.</p>
<p>Other adverse effects: —</p>

SECTION 13-DISPOSAL CONSIDERATIONS

<p>Residues and spilled material are hazardous waste due to ignitability. Disposal must be in accordance with applicable federal, state, or local regulations.</p> <p>The container for this product can present explosion or fire hazards, even when emptied. To avoid risk of injury, do not cut, puncture, or weld on or near this container. Since the emptied containers retain product residue, follow label warnings even after container is emptied.</p>
--

SECTION 14-TRANSPORTATION INFORMATION

US DOT	Shipping Name	ETHYLBENZENE	Hazard Labels	
	Hazard Class	3		
	UN Number	1175		
	Packing Group	II		
Sea(IMO/IMDG)	Shipping Name	ETHYLBENZENE	Hazard Labels	
	Hazard Class	3.2		
	UN Number	1175		
	Packing Group	II		
Air(ICAO/IATA)	Shipping Name	ETHYLBENZENE	Hazard Labels	
	Hazard Class	3		
	Subsidiary Class	1175		
	Packing Group	II		

EUROPEAN RID/ADR (ADR/RID)	Shipping Name	ETHYLBENZENE	Hazard Labels	
	Hazard Class	3		
	UN Number	1175		
Canadian TDG	Shipping Name	ETHYLBENZENE	Hazard Labels	
	Hazard Class	3		
	UN Number	1175		
	Packing Group	II		
	Subsidiary Class	9.2		

SECTION 15-REGULATORY INFORMATION

US FEDERAL

TSCA

CAS# 100-41-4 is listed on the TSCA inventory.
Health & Safety Reporting List
CAS# 100-41-4 : Effective Date : June 19, 1987 ; Sunset Date : June 19, 1997
Chemical Test Rules
None of the chemicals in this product are under a Chemical Test Rule.
Section 12b
None of the chemicals are listed under TSCA section 12b.
TSCA Significant New Use Rule
None of the chemicals in this material have a SNUR under TSCA.

SARA

Section 302 (RQ)
CAS# 100-41-4 : final RQ = 1000 pounds (454 kg)
Section 302 (TPQ)
None of the chemicals in this product have a TPQ.
SARA Codes
CAS# 100-41-4 : acute, chronic, flammable.
Section 313
This material contains Ethylbenzene (CAS# 100-41-4, 99.0%) ,which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 372.

Clean Air Act

CAS# 100-41-4 is listed as a hazardous air pollutant (HAP) .
This material does not contain any class 1 Ozone depletors.
This material does not contain any class 2 Ozone depletors.

Clean Water Act

CAS# 100-41-4 is listed as a hazardous Substance under the CWA.
CAS# 100-41-4 is listed as a Priority Pollutant under the Clean Water Act.
CAS# 100-41-4 is listed as a Toxic Pollutant under the Clean Water Act.

OSHA

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

Ethylbenzene can be found on the following state right to know lists : California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.

California No Significant Risk Level : None of the chemicals in this product are listed.

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols : XN F
Risk Phrases : R 11 Highly flammable.
R 20 Harmful by inhalation.
Safety Phrases : S 16 Keep away from sources of ignition-No smoking.
S 24/25 Avoid contact with skin and eyes.
S 29 Do not empty into drains.

CANADA

CAS# 100-41-4 is listed on Canada's DSL/NDSL list.
This product has a WHMIS classification of B2, D2B.

SECTION 16-OTHER INFORMATION**References and sources**

1. CHEMINFO Data Bank, CCINFO CD, 2005-3
2. HSDB Data Bank, TOMES PLUS CD, Vol.65,2005
3. RETECS Data Bank, TOMES PLUS CD, Vol.65, 2000
4. Hazardous Substance Data Bank, Environment Protection, Administration, Executive Yuan, ROC (Taiwan)
5. Chemwatch Data Bank, 2005-1
6. SDS, GHS in Taiwan, Council of Labor Affairs, Executive Yuan, ROC (Taiwan)

Version	Date	Remark
Version 1	06/01/1998	Original Version.
Version 2	04/20/2001	Updated 10 sections to 16 sections.
Version 3	08/01/2003	Updated "SECTION 9-PHYSICAL AND CHEMICAL PROPERTIES".
Version 4	01/01/2006	Updated "SECTION 14-TRANSPORTATION INFORMATION".
Version 5	08/21/2008	Updated each section by GHS SDS.
Version 6	08/01/2011	Checked each section by SHE
Prepared by	Safety & Environment Protection Section, Taiwan SM Corporation Kaohsiung Plant.	



SAFETY DATA SHEET

Creation Date 08-Nov-2010

Revision Date 18-Jun-2015

Revision Number 2

1. Identification

Product Name Fluoranthene

Cat No. : AC119170000; AC119170250; AC119171000; AC119175000

Synonyms Benzo[j,k]fluorene

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Acute oral toxicity

Category 4

Label Elements

Signal Word

Warning

Hazard Statements

Harmful if swallowed



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling
Do not eat, drink or smoke when using this product

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

Rinse mouth

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Fluoranthene	206-44-0	>95

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
Skin Contact	Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes. Obtain medical attention.
Inhalation	Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.
Ingestion	Do not induce vomiting. Get medical attention.
Most important symptoms/effects Notes to Physician	No information available. Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Water spray. Carbon dioxide (CO ₂). Dry chemical. alcohol-resistant foam.
Unsuitable Extinguishing Media	No information available
Flash Point	100 °C / 212 °F
Method -	No information available
Autoignition Temperature	No information available
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion ProductsCarbon monoxide (CO) Carbon dioxide (CO₂)**Protective Equipment and Precautions for Firefighters**

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPAHealth
2Flammability
0Instability
0Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment.
-----------------------------	---

Environmental Precautions See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up Sweep up or vacuum up spillage and collect in suitable container for disposal.

7. Handling and storage

Handling Ensure adequate ventilation. Wear personal protective equipment. Avoid contact with skin and eyes. Do not breathe dust. Do not breathe vapors or spray mist. Avoid dust formation.

Storage Keep in a dry, cool and well-ventilated place. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder Solid
Appearance	Light green
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	109 - 111 °C / 228.2 - 231.8 °F
Boiling Point/Range	384 - 34 °C / 723.2 - 93.2 °F
Flash Point	100 °C / 212 °F
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	No information available
Vapor Density	No information available
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C16 H10
Molecular Weight	202.25

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information No acute toxicity information is available for this product

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Fluoranthene	2 g/kg (Rat)	3180 mg/kg (Rabbit)	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation	No information available
Sensitization	No information available
Carcinogenicity	The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Fluoranthene	206-44-0	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Fluoranthene	Not listed	Oncorhynchus mykiss: LC50=0.0077 mg/L 96h	Not listed	EC50: 0.78 mg/L 20h

Persistence and Degradability No information available
Bioaccumulation/ Accumulation No information available.

Mobility

Component	log Pow
Fluoranthene	5.33

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Fluoranthene - 206-44-0	U120	-

14. Transport information

DOT

UN-No UN3077
Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE,SOLID, N.O.S.
Proper technical name (Fluoranthene)
Hazard Class 9
Packing Group III

TDG

UN-No UN3077
Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE,SOLID, N.O.S.
Hazard Class 9
Packing Group III

IATA

UN-No UN3077
Proper Shipping Name Environmentally hazardous substance, solid, n.o.s
Hazard Class 9
Packing Group III

IMDG/IMO

UN-No UN3077
Proper Shipping Name Environmentally hazardous substance, solid, n.o.s
Hazard Class 9
Packing Group III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Fluoranthene	X	-	X	205-912-4	-		-	X	X	X	-

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Fluoranthene	206-44-0	>95	1.0 0.1

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Fluoranthene	-	-	X	X

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Fluoranthene	100 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Fluoranthene	X	X	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D1B Toxic materials



16. Other information

Prepared By	Regulatory Affairs Thermo Fisher Scientific Email: EMSDS.RA@thermofisher.com
Creation Date	08-Nov-2010
Revision Date	18-Jun-2015
Print Date	18-Jun-2015
Revision Summary	This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name	Fluorene	
Cat No. :	AC156130000; AC156130250; AC156131000; AC156135000	
Synonyms	Diphenylenemethane	
Recommended Use	Laboratory chemicals.	
Uses advised against	No Information available	
<u>Details of the supplier of the safety data sheet</u>		
Company Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100	Entity / Business Name Acros Organics One Reagent Lane Fair Lawn, NJ 07410	Emergency Telephone Number For information US call: 001-800-ACROS-01 / Europe call: +32 14 57 52 11 Emergency Number US :001-201-796-7100 / Europe : +32 14 57 52 99 CHEMTREC Tel. No. US :001-800-424-9300 / Europe :001-703-527-3887

2. Hazard(s) identification

Classification

Classification under 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Label Elements

None required

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects
May form combustible dust concentrations in air

3. Composition / information on ingredients

Component	CAS-No	Weight %
Fluorene	86-73-7	98

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
Skin Contact	Wash off immediately with soap and plenty of water while removing all contaminated

	clothes and shoes. Obtain medical attention.
Inhalation	Remove from exposure, lie down. Move to fresh air. Obtain medical attention.
Ingestion	Clean mouth with water. Get medical attention.
Most important symptoms/effects Notes to Physician	No information available. Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Water spray. Carbon dioxide (CO ₂). Dry chemical. chemical foam.
Unsuitable Extinguishing Media	No information available
Flash Point	151 °C / 303.8 °F
Method -	No information available
Autoignition Temperature	Not applicable
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Dust can form an explosive mixture in air. Do not allow run-off from fire fighting to enter drains or water courses.

Hazardous Combustion Products

None known

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
0	1	0	N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment.
Environmental Precautions	Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained.
Methods for Containment and Clean Up	Sweep up or vacuum up spillage and collect in suitable container for disposal. Do not let this chemical enter the environment.

7. Handling and storage

Handling	Avoid contact with skin and eyes. Do not breathe dust. Do not ingest.
Storage	Keep in a dry, cool and well-ventilated place. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines	This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.
Engineering Measures	Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
Skin and body protection	Wear appropriate protective gloves and clothing to prevent skin exposure.
Respiratory Protection	No protective equipment is needed under normal use conditions.
Hygiene Measures	Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder Solid
Appearance	Beige
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	112 - 116 °C / 233.6 - 240.8 °F
Boiling Point/Range	298 °C / 568.4 °F @ 760 mmHg
Flash Point	151 °C / 303.8 °F
Evaporation Rate	Not applicable
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	13 hPa @ 146 °C
Vapor Density	Not applicable
Relative Density	1.200
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	Not applicable
Decomposition Temperature	No information available
Viscosity	Not applicable
Molecular Formula	C13 H10
Molecular Weight	166.22

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	None under normal use conditions
Hazardous Polymerization	No information available.
Hazardous Reactions	None under normal processing.

11. Toxicological information**Acute Toxicity**

Product Information	No acute toxicity information is available for this product
Component Information	

Toxicologically Synergistic Products	No information available														
<u>Delayed and immediate effects as well as chronic effects from short and long-term exposure</u>															
Irritation	No information available														
Sensitization	No information available														
Carcinogenicity	The table below indicates whether each agency has listed any ingredient as a carcinogen.														
<table border="1"> <thead> <tr> <th>Component</th> <th>CAS-No</th> <th>IARC</th> <th>NTP</th> <th>ACGIH</th> <th>OSHA</th> <th>Mexico</th> </tr> </thead> <tbody> <tr> <td>Fluorene</td> <td>86-73-7</td> <td>Not listed</td> <td>Not listed</td> <td>Not listed</td> <td>Not listed</td> <td>Not listed</td> </tr> </tbody> </table>	Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico	Fluorene	86-73-7	Not listed	Not listed	Not listed	Not listed	Not listed	
Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico									
Fluorene	86-73-7	Not listed	Not listed	Not listed	Not listed	Not listed									
Mutagenic Effects	No information available														
Reproductive Effects	No information available.														
Developmental Effects	No information available.														
Teratogenicity	No information available.														
STOT - single exposure	None known														
STOT - repeated exposure	None known														
Aspiration hazard	No information available														
Symptoms / effects,both acute and delayed	No information available														
Endocrine Disruptor Information	No information available														
Other Adverse Effects	The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.														

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Persistence and Degradability Insoluble in water May persist
Bioaccumulation/ Accumulation No information available.

Mobility . Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Fluorene	4.18

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT Not regulated
TDG Not regulated
IATA
UN-No 3077
Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.*
Hazard Class 9
Packing Group III
IMDG/IMO

UN-No 3077
 Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.
 Hazard Class 9
 Packing Group III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Fluorene	X	X	-	201-695-5	-		X	X	X	X	-

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazardous Categorization

Acute Health Hazard No
 Chronic Health Hazard No
 Fire Hazard Yes
 Sudden Release of Pressure Hazard No
 Reactive Hazard No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Fluorene	-	-	X	X

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
 Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Fluorene	5000 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Fluorene	X	X	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class B4 Flammable solid

**16. Other information**

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Revision Date 10-Feb-2015

Print Date 10-Feb-2015

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

SAFETY DATA SHEET

Version 5.7
Revision Date 11/03/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Heptane

Product Number : 246654
Brand : Sigma-Aldrich
Index-No. : 601-008-00-2

CAS-No. : 142-82-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225
Skin irritation (Category 2), H315
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336
Aspiration hazard (Category 1), H304
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H225 : Highly flammable liquid and vapour.
H304 : May be fatal if swallowed and enters airways.
H315 : Causes skin irritation.
H336 : May cause drowsiness or dizziness.
H410 : Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₇ H ₁₆
Molecular weight	: 100.20 g/mol
CAS-No.	: 142-82-5
EC-No.	: 205-563-8
Index-No.	: 601-008-00-2
Registration number	: 01-2119457603-38-XXXX

Hazardous components

Component	Classification	Concentration
Heptane	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; Aquatic Chronic 1; H225, H304, H315, H336, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Flash back possible over considerable distance.

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

In case of fire: Evacuate area. Fight fire remotely due to the risk of explosion. Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Store under inert gas. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Heptane	142-82-5	TWA	85.000000 ppm 350.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		C	440.000000 ppm 1,800.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
	Remarks	15 minute ceiling value		
		TWA	500.000000 ppm 2,000.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	400.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		TWA	400.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		TWA	400 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 65 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: liquid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -91 °C (-132 °F) |
| f) Initial boiling point and boiling range | 98 °C (208 °F) |
| g) Flash point | -3.99 °C (24.82 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7 %(V)
Lower explosion limit: 1.1 %(V) |
| k) Vapour pressure | 110.7 hPa (83.0 mmHg) at 37.7 °C (99.9 °F)
53.3 hPa (40.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density | No data available |

m) Relative density	0.684 g/mL at 25 °C (77 °F)
n) Water solubility	insoluble
o) Partition coefficient: n-octanol/water	log Pow: > 3.000
p) Auto-ignition temperature	223.0 °C (433.4 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

LC50 Inhalation - Rat - 4 h - 103,000 mg/m³

Inhalation: Irritating to respiratory system.

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

- IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
- NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
- OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

May cause drowsiness or dizziness.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

May be fatal if swallowed and enters airways.

Additional Information

RTECS: MI7700000

Prolonged or repeated exposure to skin causes defatting and dermatitis., Central nervous system depression, narcosis, Damage to the lungs.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

- | | |
|---|---|
| Toxicity to fish | LC50 - Carassius auratus (goldfish) - 4 mg/l - 24.0 h |
| | LC50 - Tilapia mossambica - 375 mg/l - 96.0 h |
| Toxicity to daphnia and other aquatic invertebrates | EC50 - Daphnia magna (Water flea) - 1.50 mg/l - 48 h |

12.2 Persistence and degradability

Ratio BOD/ThBOD 3.5 %

12.3 Bioaccumulative potential

Indication of bioaccumulation.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life with long lasting effects.

Do not empty into drains. Avoid release to the environment.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1206 Class: 3 Packing group: II
Proper shipping name: Heptanes
Reportable Quantity (RQ):
Marine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 1206 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: HEPTANES
Marine pollutant:yes

IATA

UN number: 1206 Class: 3 Packing group: II
Proper shipping name: Heptanes

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Heptane	142-82-5	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Heptane	142-82-5	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Heptane	142-82-5	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity

Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Skin Irrit.	Skin irritation

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
 Product Safety – Americas Region
 1-800-521-8956

Version: 5.7

Revision Date: 11/03/2015

Print Date: 02/18/2016

SAFETY DATA SHEET

Version 3.8
Revision Date 04/24/2015
Print Date 04/01/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Hexachlorobenzene

Product Number : 171050
Brand : Aldrich
Index-No. : 602-065-00-6

CAS-No. : 118-74-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350
Specific target organ toxicity - repeated exposure, Oral (Category 1), H372
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H350

May cause cancer.

H372

Causes damage to organs through prolonged or repeated exposure if swallowed.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P260

Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.

P264

Wash skin thoroughly after handling.

P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₆ Cl ₆
Molecular weight	: 284.78 g/mol
CAS-No.	: 118-74-1
EC-No.	: 204-273-9
Index-No.	: 602-065-00-6

Hazardous components

Component	Classification	Concentration
Hexachlorobenzene		
	Carc. 1B; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H350, H372, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

Storage class (TRGS 510): Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Hexachlorobenzene	118-74-1	TWA	0.002000 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Porphyrin effects Skin damage Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: powder
Colour: white |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 227 - 229 °C (441 - 444 °F) - lit. |
| f) Initial boiling point and boiling range | 323 - 326 °C (613 - 619 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |

m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 10,000 mg/kg

LD50 Oral - Mouse - 4,000 mg/kg

LD50 Oral - Cat - 1,700 mg/kg

LD50 Oral - Rabbit - 2,600 mg/kg

LD50 Oral - Guinea pig - > 3,000 mg/kg

LD50 Oral - Quail - > 6,400 mg/kg

LD50 Oral - Mammal - > 5,000 mg/kg

Remarks: Behavioral:Somnolence (general depressed activity). Behavioral:Change in motor activity (specific assay).

LC50 Inhalation - Rat - 3,600 mg/m³

LC50 Inhalation - Mouse - 4,000 mg/m³

LC50 Inhalation - Cat - 1,600 mg/m³

LC50 Inhalation - Rabbit - 1,800 mg/m³

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

Causes photosensitivity. Exposure to light can result in allergic reactions resulting in dermatologic lesions, which can vary from sunburnlike responses to edematous, vesiculated lesions, or bullae

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Hexachlorobenzene)

NTP: Reasonably anticipated to be a human carcinogen (Hexachlorobenzene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

Ingestion - Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

Additional Information

RTECS: Not available

Liver -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish	LC50 - Lepomis macrochirus (Bluegill) - 7.6 mg/l - 96.0 h NOEC - Pimephales promelas (fathead minnow) - > 0.0048 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - Daphnia magna (Water flea) - > 0.005 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation	Pimephales promelas (fathead minnow) - 32 d - 0.0003 mg/l
-----------------	--

Bioconcentration factor (BCF): 22,000

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2729 Class: 6.1 Packing group: III
Proper shipping name: Hexachlorobenzene
Reportable Quantity (RQ): 10 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 2729 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: HEXACHLOROBENZENE
Marine pollutant:yes

IATA

UN number: 2729 Class: 6.1 Packing group: III
Proper shipping name: Hexachlorobenzene

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Chronic Health Hazard

Massachusetts Right To Know Components

Hexachlorobenzene	CAS-No. 118-74-1	Revision Date 2007-07-01
-------------------	---------------------	-----------------------------

Pennsylvania Right To Know Components

Hexachlorobenzene	CAS-No. 118-74-1	Revision Date 2007-07-01
-------------------	---------------------	-----------------------------

New Jersey Right To Know Components

Hexachlorobenzene	CAS-No. 118-74-1	Revision Date 2007-07-01
-------------------	---------------------	-----------------------------

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer. Hexachlorobenzene	CAS-No. 118-74-1	Revision Date 2007-09-28
--	---------------------	-----------------------------

WARNING: This product contains a chemical known to the	CAS-No.	Revision Date
--	---------	---------------

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H350	May cause cancer.
H372	Causes damage to organs through prolonged or repeated exposure if swallowed.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.8

Revision Date: 04/24/2015

Print Date: 04/01/2016

SAFETY DATA SHEET

Version 5.1
Revision Date 02/09/2015
Print Date 04/11/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Residual Solvent Class 1 - 1,1,1-Trichloroethane,
United States Pharmacopeia (USP) Reference
Standard

Product Number : 1601226
Brand : USP

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****2.2 GHS Label elements, including precautionary statements****2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none**

3. COMPOSITION/INFORMATION ON INGREDIENTS**3.2 Mixtures**

No components need to be disclosed according to the applicable regulations.

4. FIRST AID MEASURES**4.1 Description of first aid measures**

No data available

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media**

No data available

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

No data available

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

For personal protection see section 8.

6.2 Environmental precautions

No data available

6.3 Methods and materials for containment and cleaning up

No data available

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

No data available

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

8.2 Exposure controls

No data available

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|-------------------|
| a) Appearance | Form: liquid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | No data available |
| f) Initial boiling point and boiling range | No data available |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | No data available |

- | | |
|---|-------------------|
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

No data available

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

No data available

10.6 Hazardous decomposition products

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

Skin corrosion/irritation

Serious eye damage/eye irritation

Respiratory or skin sensitisation

Germ cell mutagenicity

Carcinogenicity

Reproductive toxicity

Specific target organ toxicity - single exposure

Specific target organ toxicity - repeated exposure

Aspiration hazard

Additional Information

RTECS: Not available

12. ECOLOGICAL INFORMATION

12.1 Toxicity

12.2 Persistence and degradability

12.3 Bioaccumulative potential

12.4 Mobility in soil

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

No data available

14. TRANSPORT INFORMATION

DOT (US)

NA-Number: 1993 Class: NONE Packing group: III
Proper shipping name: Combustible liquid, n.o.s. (DMSO (USP Specification))

Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

16. OTHER INFORMATION

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.1

Revision Date: 02/09/2015

Print Date: 04/11/2016

Safety data for indeno[1,2,3-cd]pyrene

[Glossary](#) of terms on this data sheet.

The information on this web page is provided to help you to work safely, but it is intended to be an overview of hazards, not a replacement for a full Material Safety Data Sheet (MSDS). MSDS forms can be downloaded from the web sites of many chemical suppliers.

General

Synonyms: 1,10-(1,2-phenylene)pyrene, 1,10-(o-phenylene)pyrene, o-phenylenepyrene, 2,3-phenylenepyrene, 2,3,o-phenylenepyrene, IP
Use:

Molecular formula: C₂₂H₁₂

CAS No: 193-39-5

EINECS No: 205-893-2

Physical data

Appearance: solid

Melting point: 161 - 163 C

Boiling point: 536 C

Vapour density:

Vapour pressure:

Density (g cm⁻³):

Flash point:

Explosion limits:

Autoignition temperature:

Water solubility:

Stability

Stable. Incompatible with strong oxidizing agents.

Toxicology

Limited evidence that this material may be carcinogenic.

Toxicity data

(The meaning of any toxicological abbreviations which appear in this section is given [here](#).)

Risk phrases

(The meaning of any risk phrases which appear in this section is given [here.](#))
R40.

Transport information

(The meaning of any UN hazard codes which appear in this section is given [here.](#))

Non-hazardous for air, sea and road freight.

Personal protection

Treat as potentially hazardous - many multi-ring aromatic compounds are suspected carcinogens.

Safety phrases

(The meaning of any safety phrases which appear in this section is given [here.](#))

S36 S37 S45.

[Return to [Physical & Theoretical Chemistry Lab. Safety home page.](#)]

This information was last updated on May 10, 2005. We have tried to make it as accurate and useful as possible, but can take no responsibility for its use, misuse, or accuracy. We have not verified this information, and cannot guarantee that it is up-to-date.

Note also that the information on the PTCL Safety web site, where this page was hosted, has been copied onto many other sites, often without permission. If you have any doubts about the veracity of the information that you are viewing, or have any queries, please check the URL that your web browser displays for this page. If the URL **begins** "http://msds.chem.ox.ac.uk/" the page is maintained by the Safety Officer in Physical Chemistry at Oxford University. If not, this page is a copy made by some other person and we have no responsibility for it.

SAFETY DATA SHEET

Version 5.8
Revision Date 03/06/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Isopropyl alcohol

Product Number : W292907
Brand : Aldrich
Index-No. : 603-117-00-0

CAS-No. : 67-63-0

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H319

Causes serious eye irritation.

H336

May cause drowsiness or dizziness.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P261

Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P312	Call a POISON CENTER or doctor/ physician if you feel unwell.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 2-Propanol
sec-Propyl alcohol
Isopropyl alcohol
Isopropanol

Formula : C₃H₈O
Molecular weight : 60.10 g/mol
CAS-No. : 67-63-0
EC-No. : 200-661-7
Index-No. : 603-117-00-0

Hazardous components

Component	Classification	Concentration
2-Propanol		
	Flam. Liq. 2; Eye Irrit. 2A; STOT SE 3; H225, H319, H336	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Move out of dangerous area. Consult a physician. Show this safety data sheet to the doctor in attendance.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Handle and store under inert gas. hygroscopic

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
2-Propanol	67-63-0	TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment		

		Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	400 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	400.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	400.000000 ppm 980.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	400.000000 ppm 980.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	500.000000 ppm 1,225.000000 mg/m3	USA. NIOSH Recommended Exposure Limits

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
2-Propanol	67-63-0	Acetone	40.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested:Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 60 min

Material tested:Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|---|
| a) Appearance | Form: liquid
Colour: colourless |
| b) Odour | alcohol-like |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -89.5 °C (-129.1 °F) - lit. |
| f) Initial boiling point and boiling range | 82 °C (180 °F) - lit. |
| g) Flash point | 12.0 °C (53.6 °F) - closed cup |
| h) Evaporation rate | 3.0 |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or | Upper explosion limit: 12.7 %(V)
Lower explosion limit: 2 %(V) |

explosive limits

- | | |
|---|--|
| k) Vapour pressure | 43.2 hPa (32.4 mmHg) at 20.0 °C (68.0 °F)
58.7 hPa (44.0 mmHg) at 25.0 °C (77.0 °F) |
| l) Vapour density | No data available |
| m) Relative density | 0.785 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | completely soluble |
| o) Partition coefficient: n-octanol/water | log Pow: 0.05 |
| p) Auto-ignition temperature | 425.0 °C (797.0 °F) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

Surface tension 20.8 mN/m at 25.0 °C (77.0 °F)

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year. Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

10.5 Incompatible materials

Oxidizing agents, Acid anhydrides, Aluminium, Halogenated compounds, Acids

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 5,045 mg/kg

Remarks: Behavioral: Altered sleep time (including change in righting reflex). Behavioral: Somnolence (general depressed activity).

LC50 Inhalation - Rat - 8 h - 16000 ppm

LD50 Dermal - Rabbit - 12,800 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Mild skin irritation

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (2-Propanol)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

Inhalation, Oral - May cause drowsiness or dizziness.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: NT8050000

Central nervous system depression, prolonged or repeated exposure can cause:, Nausea, Headache, Vomiting, narcosis, Drowsiness, Overexposure may cause mild, reversible liver effects., Aspiration may lead to:, Lung oedema, Pneumonia

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney - Irregularities - Based on Human Evidence

Kidney - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 9,640.00 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 5,102.00 mg/l - 24 h

Immobilization EC50 - Daphnia magna (Water flea) - 6,851 mg/l - 24 h

Toxicity to algae EC50 - Desmodesmus subspicatus (green algae) - > 2,000.00 mg/l - 72 h

EC50 - Algae - > 1,000.00 mg/l - 24 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No bioaccumulation is to be expected (log Pow <= 4).

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1219 Class: 3 Packing group: II
Proper shipping name: Isopropanol
Reportable Quantity (RQ):

Poison Inhalation Hazard: No

IMDG

UN number: 1219 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: ISOPROPANOL

IATA

UN number: 1219 Class: 3 Packing group: II
Proper shipping name: Isopropanol

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
2-Propanol	67-63-0	1987-01-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
2-Propanol	67-63-0	1987-01-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
2-Propanol	67-63-0	1987-01-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
2-Propanol	67-63-0	1987-01-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
STOT SE	Specific target organ toxicity - single exposure

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.8


Revision Date: 03/06/2015

Print Date: 02/18/2016


MATERIAL SAFETY DATA SHEET

Prepared to U.S. OSHA, CMA, ANSI and Canadian WHMIS Standards

METHANE GAS



LIQUID METHANE



PART I *What is the material and what do I need to know in an emergency?*

1. PRODUCT IDENTIFICATION

CHEMICAL NAME; CLASS:

METHANE - CH₄, Gaseous
METHANE - CH₄, Liquefied (Cryogenic)

Document Number: 001033

PRODUCT USE:

Fuel and for general analytic/synthetic chemical uses.

SUPPLIER/MANUFACTURER'S NAME:

AIRGAS INC.

ADDRESS:

259 N. Radnor-Chester Road
 Suite 100
 Radnor, PA 19087-5283

BUSINESS PHONE:

1-610-687-5253

EMERGENCY PHONE:

1-800-949-7937

International: 423-479-0293

DATE OF PREPARATION:

May 12, 1996

REVISION DATE:

January 3, 2001

2. COMPOSITION and INFORMATION ON INGREDIENTS

CHEMICAL NAME	CAS #	mole %	EXPOSURE LIMITS IN AIR					
			ACGIH		OSHA		IDLH ppm	OTHER
			TLV ppm	STEL ppm	PEL ppm	STEL ppm		
Methane	74-82-8	> 99%	There are no specific exposure limits for Methane. Methane is a simple asphyxiant (SA). Oxygen levels should be maintained above 19.5%.					
Maximum Impurities		< 1%	None of the trace impurities in this product contribute significantly to the hazards associated with the product. All hazard information pertinent to this product has been provided in this Material Safety Data Sheet, per the requirements of the OSHA Hazard Communication Standard (29 CFR 1910.1200) and State equivalent standards.					

NE = Not Established

C = Ceiling Limit

See Section 16 for Definitions of Terms Used

NOTE: All WHMIS required information is included. It is located in appropriate sections based on the ANSI Z400.1-1993 format.

3. HAZARD IDENTIFICATION



EMERGENCY OVERVIEW: Methane is an odorless, colorless gas, or a colorless, odorless liquid in its cryogenic form. Both the liquid and the gas pose a serious fire hazard when accidentally released. The liquid will rapidly boil to the gas at standard temperatures and pressures. As a gas, it will act as a simple asphyxiant and present a significant health hazard by displacing the oxygen in the atmosphere. The gas is lighter than air and may spread long distances. Distant ignition and flashback are possible. The liquefied gas can cause frostbite to any contaminated tissue. Flame or high temperature impinging on a localized area of the cylinder of Methane can cause the cylinder to rupture without activating the cylinder's relief devices. Provide adequate fire protection during emergency response situations. Allow the released gas to dissipate in the atmosphere.

SYMPTOMS OF OVEREXPOSURE BY ROUTE OF EXPOSURE: The most significant route of overexposure for this gas is by inhalation. The following paragraphs describe symptoms of exposure by route of exposure.

INHALATION: High concentrations of this gas can cause an oxygen-deficient environment. Individuals breathing such an atmosphere may experience symptoms which include headaches, ringing in ears, dizziness, drowsiness, unconsciousness, nausea, vomiting, and depression of all the senses. Under some circumstances of overexposure, death may occur. The effects associated with various levels of oxygen are as follows:

CONCENTRATION	SYMPTOMS OF EXPOSURE
12-16% Oxygen:	Breathing and pulse rate increased, muscular coordination slightly disturbed.
10-14% Oxygen:	Emotional upset, abnormal fatigue, disturbed respiration.
6-10% Oxygen:	Nausea and vomiting, collapse or loss of consciousness.
Below 6%:	Convulsive movements, possible respiratory collapse, and death.

OTHER POTENTIAL HEALTH EFFECTS: Contact with cryogenic liquid or rapidly expanding gases (which are released under high pressure) may cause frostbite. Symptoms of frostbite include change in skin color to white or grayish-yellow. The pain after contact with the liquid can quickly subside.

HAZARDOUS MATERIAL INFORMATION SYSTEM			
HEALTH		(BLUE)	1
FLAMMABILITY		(RED)	4
REACTIVITY		(YELLOW)	0
PROTECTIVE EQUIPMENT			B
EYES	RESPIRATORY	HANDS	BODY
	See Section 8		See Section 8
For routine industrial applications			

See Section 16 for Definition of Ratings

HEALTH EFFECTS OR RISKS FROM EXPOSURE: An Explanation in **Law Terms**. Overexposure to Methane may cause the following health effects:

ACUTE: The most significant hazard associated with this gas is inhalation of oxygen-deficient atmospheres. Symptoms of oxygen deficiency include respiratory difficulty, headache, dizziness, and nausea. At high concentrations, unconsciousness or death may occur. Contact with cryogenic liquid or rapidly expanding gases may cause frostbite.

CHRONIC: There are currently no known adverse health effects associated with chronic exposure to Methane.

TARGET ORGANS: Respiratory system.

PART II *What should I do if a hazardous situation occurs?*

4. FIRST-AID MEASURES

RESCUERS SHOULD NOT ATTEMPT TO RETRIEVE VICTIMS OF EXPOSURE TO METHANE WITHOUT ADEQUATE PERSONAL PROTECTIVE EQUIPMENT. At a minimum, Self-Contained Breathing Apparatus and Fire-Retardant Personal Protective equipment should be worn. Adequate fire protection must be provided during rescue situations.


4. FIRST-AID MEASURES (Continued)

Remove victim(s) to fresh air as quickly as possible. Trained personnel should administer supplemental oxygen and/or cardio-pulmonary resuscitation, if necessary. Only trained personnel should administer supplemental oxygen.

In case of frostbite, place the frostbitten part in warm water. DO NOT USE HOT WATER. If warm water is not available, or is impractical to use, wrap the affected parts gently in blankets. Alternatively, if the fingers or hands are frostbitten, place the affected area in the armpit. Encourage victim to gently exercise the affected part while being warmed. Seek immediate medical attention. Victim(s) must be taken for medical attention. Rescuers should be taken for medical attention, if necessary. Take copy of label and MSDS to physician or other health professional with victim(s).

5. FIRE-FIGHTING MEASURES

METHANE GAS

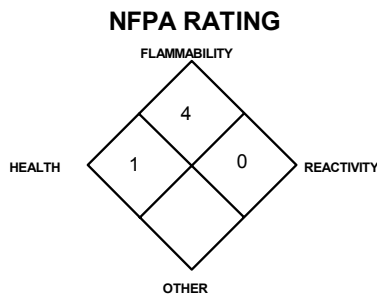

FLASH POINT (Closed Cup):
-187°C (-306°F)

AUTOIGNITION TEMPERATURE:
537°C (999°F)


FLAMMABLE LIMITS (in air by volume, %):

Lower (LEL): 5.0%

Upper (UEL): 15.0%

See Section 16 for Definition of Ratings

LIQUID METHANE

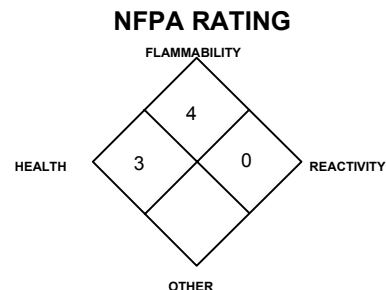

FIRE EXTINGUISHING MATERIALS: Extinguish fires of this gas by shutting off the source of the gas. Use water spray to cool fire-exposed containers, structures, and equipment.

UNUSUAL FIRE AND EXPLOSION HAZARDS: When involved in a fire, this gas will ignite and produce toxic gases including carbon monoxide and carbon dioxide. An extreme explosion hazard exists in areas in which the gas has been released, but the material has not yet ignited.

DANGER! Fires impinging (direct flame) on the outside surface of unprotected pressure storage vessels of Methane can be very dangerous and lead to container failure. The resulting fire and explosion can result in severe equipment damage and personnel injury or death over a large area around the vessel. For massive fires in large areas, use unmanned hose holder or monitor nozzles; if this is not possible, withdraw from area and allow fire to burn.

RESPONSE TO FIRE INVOLVING CRYOGEN: Cryogenic liquids can be particularly dangerous during fires because of their potential to rapidly freeze water. Careless use of water may cause heavy icing. Furthermore, relatively warm water greatly increases the evaporation rate of Methane. If large concentrations of Methane gas are present, the water vapor in the surrounding air will condense, creating a dense fog that may make it difficult to find fire exits or equipment. Liquid Methane, when exposed to the atmosphere, will produce a cloud of ice/fog in the air upon its release. A flammable mixture will exist within the vapor cloud and it is advisable that personnel keep well outside the area of visible moisture.

Explosion Sensitivity to Mechanical Impact: Not sensitive.

Explosion Sensitivity to Static Discharge: Static discharge may cause Methane to ignite explosively.

SPECIAL FIRE-FIGHTING PROCEDURES: Structural fire-fighters must wear Self-Contained Breathing Apparatus and full protective equipment. The best fire-fighting technique may be simply to let the burning gas escape from the pressurized cylinder, tank car, or pipeline. Stop the leak before extinguishing fire. If the fire is extinguished before the leak is sealed, the still-leaking gas could explosively re-ignite without warning and cause extensive damage, injury, or fatality. In this case, increase ventilation (in enclosed areas) to prevent flammable or explosive mixture formation. For large releases, consider evacuation. Refer to the North American Emergency Response Guidebook for additional information.

6. ACCIDENTAL RELEASE MEASURES

SPILL AND LEAK RESPONSE: Uncontrolled releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a release, clear the affected area, protect people, and respond with trained personnel. Adequate fire protection must be provided. Minimum Personal Protective Equipment should be **Level B: fire-retardant protective clothing, gloves resistant to tears, and Self-Contained Breathing Apparatus.**

Use only non-sparking tools and equipment. Locate and seal the source of the leaking gas. Protect personnel attempting the shut-off with water-spray. Allow the gas, which is lighter than air, to dissipate. Liquid Methane, when exposed to the atmosphere, will produce a cloud of ice/fog in the air upon its release. A flammable mixture will exist within the vapor cloud, and it is advisable that personnel keep well outside the area of visible moisture. If cryogenic liquid is released, keep area clear and allow the liquid to evaporate. The gas that is then formed should be allowed to dissipate.

Monitor the surrounding area for combustible gas levels and oxygen. The atmosphere must have at least 19.5 percent oxygen before personnel can be allowed in the area without Self-Contained Breathing Apparatus. Combustible gas concentration must be below 10% of the LEL (LEL = 5.0%) prior to entry. Attempt to close the main source valve prior to entering the area. If this does not stop the release (or if it is not possible to reach the valve), allow the gas to release in-place or remove it to a safe area and allow the gas to be released there.

RESPONSE TO CRYOGENIC RELEASE: Clear the affected area and allow the liquid to evaporate and the gas to dissipate. After the gas is formed, follow the instructions provided in the previous paragraphs. If the area must be entered by emergency personnel, SCBA, Kevlar gloves, and appropriate foot and leg protection must be worn.

THIS IS AN EXTREMELY FLAMMABLE GAS. Protection of all personnel and the area must be maintained.

PART III *How can I prevent hazardous situations from occurring?*

7. HANDLING and STORAGE

WORK PRACTICES AND HYGIENE PRACTICES: As with all chemicals, avoid getting Methane IN YOU. Do not eat or drink while handling chemicals. Be aware of any signs of dizziness or fatigue; exposures to fatal concentrations of Methane could occur without any significant warning symptoms.

STORAGE AND HANDLING PRACTICES: Cylinders should be stored in dry, well-ventilated areas away from sources of heat. Compressed gases can present significant safety hazards. Store containers away from heavily trafficked areas and emergency exits. Post "No Smoking or Open Flames" signs in storage or use areas.

SPECIAL PRECAUTIONS FOR HANDLING GAS CYLINDERS: Protect cylinders against physical damage. Store in cool, dry, well-ventilated area, away from sources of heat, ignition and direct sunlight. Do not allow area where cylinders are stored to exceed 52°C (125°F). Isolate from oxidizers such as oxygen, chlorine, or fluorine. Use a check valve or trap in the discharge line to prevent hazardous backflow. Post "No Smoking or Open Flame" signs in storage and use areas. Cylinders should be stored upright and be firmly secured to prevent falling or being knocked over. Cylinders can be stored in the open, but in such cases, should be protected against extremes of weather and from the dampness of the ground to prevent rusting. Never tamper with pressure relief devices in valves and cylinders. Electrical equipment should be non-sparking or explosion proof. The following rules are applicable to work situations in which cylinders are being used:

Before Use: Move cylinders with a suitable hand truck. Do not drag, slide, or roll cylinders. Do not drop cylinders or permit them to strike each other. Secure cylinders firmly. Leave the valve protection cap, if provided, in place until cylinder is ready for use.

During Use: Use designated CGA fittings and other support equipment. Do not use adapters. Do not heat cylinder by any means to increase the discharge rate of the product from the cylinder. Use check valve or trap in discharge line to prevent hazardous backflow into the cylinder. Do not use oils or grease on gas-handling fittings or equipment.

After Use: Close main cylinder valve. Replace valve protection cap, if provided. Mark empty cylinders "EMPTY".

NOTE: Use only DOT or ASME code containers. Earth-ground and bond all lines and equipment associated with Methane. Close valve after each use and when empty. Cylinders must not be recharged except by or with the consent of owner. For additional information refer to the Compressed Gas Association Pamphlet P-1, *Safe Handling of Compressed Gases in Containers*. Additionally, refer to CGA Bulletin SB-2 "Oxygen Deficient Atmospheres".

PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT: Follow practices indicated in Section 6 (Accidental Release Measures). Make certain that application equipment is locked and tagged-out safely. Purge gas handling equipment with inert gas (e.g., nitrogen) before attempting repairs.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

VENTILATION AND ENGINEERING CONTROLS: Use with adequate ventilation. Local exhaust ventilation is preferred, because it prevents Methane dispersion into the work place by eliminating it at its source. If appropriate, install automatic monitoring equipment to detect the presence of potentially explosive air-gas mixtures and the level of oxygen. Monitoring devices should be installed near the ceiling.

RESPIRATORY PROTECTION: Maintain oxygen levels above 19.5% in the workplace. Use supplied air respiratory protection if oxygen levels are below 19.5% or during emergency response to a release of Methane. If respiratory protection is required, follow the requirements of the Federal OSHA Respiratory Protection Standard (29 CFR 1910.134) or equivalent State standards.

EYE PROTECTION: Splash goggles or safety glasses, for protection from rapidly expanding gases and splashes of liquid Methane.

HAND PROTECTION: Wear gloves resistant to tears when handling cylinders of Methane. Use low-temperature protective gloves when working with containers of liquid Methane.

BODY PROTECTION: Use body protection appropriate for task. Transfer of large quantities under pressure may require protective equipment appropriate to protect employees from splashes of liquefied product, as well as fire retardant items.

9. PHYSICAL and CHEMICAL PROPERTIES

VAPOR DENSITY: 0.6784 kg/m³ (0.042 35 lb/ft³)

SPECIFIC GRAVITY (air = 1): 0.555

SOLUBILITY IN WATER: Very slight.

EXPANSION RATIO: 626 (cryogenic liquid)

ODOR THRESHOLD: Not applicable. Odorless.

COEFFICIENT WATER/OIL DISTRIBUTION: Not applicable. pH: Not applicable.

SPECIFIC VOLUME: 23.7

FREEZING POINT: -182.2°C (-296°F)

BOILING POINT @ 1 atm: -161°C (-258.7°F)

EVAPORATION RATE (n-BuAc): Not applicable.

VAPOR PRESSURE (psia): Not applicable.

APPEARANCE AND COLOR: Colorless, odorless gas, or colorless, odorless, cryogenic liquid.

HOW TO DETECT THIS SUBSTANCE (warning properties): There are no distinct warning properties. In terms of leak detection, fittings and joints can be painted with a soap solution to detect leaks, which will be indicated by a bubble formation.

NOTE: This gas is lighter than air and must not be allowed to accumulate in elevated locations.

10. STABILITY and REACTIVITY

STABILITY: Stable.

DECOMPOSITION PRODUCTS: When ignited in the presence of oxygen, this gas will burn to produce carbon monoxide, carbon dioxide.

MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Strong oxidizers (e.g., chlorine, bromine pentafluoride, oxygen, oxygen difluoride, and nitrogen trifluoride).

HAZARDOUS POLYMERIZATION: Will not occur.

CONDITIONS TO AVOID: Contact with incompatible materials and exposure to heat, sparks, and other sources of ignition. Cylinders exposed to high temperatures or direct flame can rupture or burst.

PART IV *Is there any other useful information about this material?*

11. TOXICOLOGICAL INFORMATION

TOXICITY DATA: There are no specific toxicology data for Methane. Methane is a simple asphyxiant, which acts to displace oxygen in the environment.

SUSPECTED CANCER AGENT: Methane is not found on the following lists: FEDERAL OSHA Z LIST, NTP, IARC, CAL/OSHA, and therefore, is neither considered to be nor suspected to be a cancer-causing agent by these agencies.

IRRITANCY OF PRODUCT: Methane is not irritating; however, contact with rapidly expanding gases can cause frostbite to exposed tissue.

SENSITIZATION TO THE PRODUCT: Methane does not cause sensitization with prolonged or repeated contact.

11. TOXICOLOGICAL INFORMATION (Continued)

REPRODUCTIVE TOXICITY INFORMATION: Listed below is information concerning the effects of Methane on the human reproductive system.

Mutagenicity: No mutagenicity effects have been described for Methane.

Embryotoxicity: No embryotoxic effects have been described for Methane.

Teratogenicity: No teratogenicity effects have been described for Methane.

Reproductive Toxicity: No reproductive toxicity effects have been described for Methane.

A mutagen is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate through generational lines. An embryotoxin is a chemical which causes damage to a developing embryo (i.e., within the first eight weeks of pregnancy in humans), but the damage does not propagate across generational lines. A teratogen is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A reproductive toxin is any substance which interferes in any way with the reproductive process.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Acute or chronic respiratory conditions may be aggravated by overexposure to the components of Methane.

RECOMMENDATIONS TO PHYSICIANS: Administer oxygen if necessary. Treat symptoms and eliminate exposure.

BIOLOGICAL EXPOSURE INDICES (BEIs): Currently, Biological Exposure Indices (BEIs) are not applicable for Methane.

12. ECOLOGICAL INFORMATION

ENVIRONMENTAL STABILITY: Methane occurs naturally in the atmosphere. This gas will be dissipated rapidly in well-ventilated areas.

EFFECT OF MATERIAL ON PLANTS or ANIMALS: Any adverse effect on animals would be related to oxygen-deficient environments. No adverse effect is anticipated to occur to plant-life, except for frost produced in the presence of rapidly expanding gases.

EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on the effects of Methane on aquatic life.

13. DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL: Product removed from the cylinder must be disposed of in accordance with appropriate Federal, State, and local regulations. Return cylinders with residual product to Airgas. Do not dispose locally.

14. TRANSPORTATION INFORMATION

THIS MATERIAL IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

For Methane Gas:

<u>PROPER SHIPPING NAME:</u>	Methane, compressed
<u>HAZARD CLASS NUMBER and DESCRIPTION:</u>	2.1 (Flammable Gas)
<u>UN IDENTIFICATION NUMBER:</u>	UN 1971
<u>PACKING GROUP:</u>	Not Applicable
<u>DOT LABEL(S) REQUIRED:</u>	Flammable Gas
<u>NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000):</u>	115

For Liquefied Methane:

<u>PROPER SHIPPING NAME:</u>	Methane, refrigerated liquid
<u>HAZARD CLASS NUMBER and DESCRIPTION:</u>	2.1 (Flammable Gas)
<u>UN IDENTIFICATION NUMBER:</u>	UN 1972
<u>PACKING GROUP:</u>	Not Applicable
<u>DOT LABEL(S) REQUIRED:</u>	Flammable Gas
<u>NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000):</u>	115

MARINE POLLUTANT: Methane is not classified by the DOT as a Marine Pollutant (as defined by 49 CFR 172.101, Appendix B).

15. REGULATORY INFORMATION

U.S. SARA REPORTING REQUIREMENTS: Methane is not subject to the reporting requirements of Sections 302, 304, and 313 of Title III of the Superfund Amendments and Reauthorization Act.

U.S. SARA THRESHOLD PLANNING QUANTITY: Not applicable.

U.S. CERCLA REPORTABLE QUANTITY (RQ): Not applicable.

CANADIAN DSL/NDL INVENTORY STATUS: Methane is on the DSL Inventory.

U.S. TSCA INVENTORY STATUS: Methane is listed on the TSCA Inventory.

OTHER U.S. FEDERAL REGULATIONS: Methane is subject to the reporting requirements of Section 112(r) of the Clean Air Act. The Threshold Quantity for this gas is 10,000 lb. Depending on specific operations involving the use of Isobutylene, the regulations of the Process Safety Management of Highly Hazardous Chemicals may be applicable (29 CFR 1910.119). Under this regulation Methane is not listed in Appendix A; however, any process that involves a flammable gas on-site, in one location, in quantities of 10,000 lb (4,553 kg) or greater is covered under this regulation unless it is used as a fuel.

U.S. STATE REGULATORY INFORMATION: Methane is covered under specific State regulations, as denoted below:

Alaska - Designated Toxic and Hazardous Substances: Methane.

California - Permissible Exposure Limits for Chemical Contaminants: Methane.

Florida - Substance List: No.

Illinois - Toxic Substance List: Methane.

Kansas - Section 302/313 List: No.

Massachusetts - Substance List: Methane.

Michigan - Critical Materials Register: No.

Minnesota - List of Hazardous Substances: Methane.

Missouri - Employer Information/Toxic Substance List: Methane.

New Jersey - Right to Know Hazardous Substance List: Methane.

North Dakota - List of Hazardous Chemicals, Reportable Quantities: No.

Pennsylvania - Hazardous Substance List: Methane.

Rhode Island - Hazardous Substance List: Methane.

Texas - Hazardous Substance List: No.

West Virginia - Hazardous Substance List: No.

Wisconsin - Toxic and Hazardous Substances: No.

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): Methane is not on the California Proposition 65 lists.

LABELING:

DANGER:

FLAMMABLE HIGH PRESSURE GAS.
CAN FORM EXPLOSIVE MIXTURES WITH AIR.


Keep away from heat, flames, and sparks.
Store and use with adequate ventilation.
Use equipment rated for cylinder pressure.
Close valve after each use and when empty.
Use in accordance with the Material Safety Data Sheet.

DO NOT REMOVE THIS PRODUCT LABEL

CANADIAN WHMIS SYMBOLS:

Class A: Compressed Gas

Class B1: Flammable Gas



16. OTHER INFORMATION

PREPARED BY:

Airgas - SAFECOR

The information contained herein is based on data considered accurate. However, no warranty is expressed or implied regarding the accuracy of these data or the results to be obtained from the use thereof. AIRGAS, Inc. assumes no responsibility for injury to the vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, AIRGAS, Inc. assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in his use of the material.

DEFINITIONS OF TERMS

A large number of abbreviations and acronyms appear on a MSDS. Some of these which are commonly used include the following:

CAS #: This is the Chemical Abstract Service Number which uniquely identifies each constituent. It is used for computer-related searching.

EXPOSURE LIMITS IN AIR:

ACGIH - American Conference of Governmental Industrial Hygienists, a professional association which establishes exposure limits. **TLV** - Threshold Limit Value - an airborne concentration of a substance which represents conditions under which it is generally believed that nearly all workers may be repeatedly exposed without adverse effect. The duration must be considered, including the 8-hour Time Weighted Average (**TWA**), the 15-minute Short Term Exposure Limit, and the instantaneous Ceiling Level (**C**). Skin absorption effects must also be considered.

OSHA - U.S. Occupational Safety and Health Administration. **PEL** - Permissible Exposure Limit - This exposure value means exactly the same as a TLV, except that it is enforceable by OSHA. The OSHA Permissible Exposure Limits are based in the 1989 PELs and the June, 1993 Air Contaminants Rule (Federal Register: 58: 35338-35351 and 58: 40191). Both the current PELs and the vacated PELs are indicated. The phrase, "Vacated 1989 PEL," is placed next to the PEL which was vacated by Court Order.

IDLH - Immediately Dangerous to Life and Health - This level represents a concentration from which one can escape within 30-minutes without suffering escape-preventing or permanent injury. **The DFG - MAK** is the Republic of Germany's Maximum Exposure Level, similar to the U.S. PEL. **NIOSH** is the National Institute of Occupational Safety and Health, which is the research arm of the U.S. Occupational Safety and Health Administration (**OSHA**). NIOSH issues exposure guidelines called **Recommended Exposure Levels (RELs)**. When no exposure guidelines are established, an entry of **NE** is made for reference.

HAZARD RATINGS:

HAZARDOUS MATERIALS IDENTIFICATION SYSTEM: Health Hazard: **0** (minimal acute or chronic exposure hazard); **1** (slight acute or chronic exposure hazard); **2** (moderate acute or significant chronic exposure hazard); **3** (severe acute exposure hazard; onetime overexposure can result in permanent injury and may be fatal); **4** (extreme acute exposure hazard; onetime overexposure can be fatal). Flammability Hazard: **0** (minimal hazard); **1** (materials that require substantial pre-heating before burning); **2** (combustible liquid or solids; liquids with a flash point of 38-93°C [100-200°F]); **3** (Class IB and IC flammable liquids with flash points below 38°C [100°F]); **4** (Class IA flammable liquids with flash points below 23°C [73°F] and boiling points below 38°C [100°F]). Reactivity Hazard: **0** (normally stable); **1** (material that can become unstable at elevated temperatures or which can react slightly with water); **2** (materials that are unstable but do not detonate or which can react violently with water); **3** (materials that can detonate when initiated or which can react explosively with water); **4** (materials that can detonate at normal temperatures or pressures).

NATIONAL FIRE PROTECTION ASSOCIATION: Health Hazard: **0** (material that on exposure under fire conditions would offer no hazard beyond that of ordinary combustible materials); **1** (materials that on exposure under fire conditions could cause irritation or minor residual injury); **2** (materials that on intense or continued exposure under fire conditions could cause temporary incapacitation or possible residual injury); **3** (materials that can on short exposure could cause serious temporary or residual injury); **4** (materials that under very short exposure causes death or major residual injury).

NATIONAL FIRE PROTECTION ASSOCIATION (Continued): Flammability Hazard and Reactivity Hazard: Refer to definitions for "Hazardous Materials Identification System".

FLAMMABILITY LIMITS IN AIR:

Much of the information related to fire and explosion is derived from the National Fire Protection Association (**NFPA**). Flash Point - Minimum temperature at which a liquid gives off sufficient vapors to form an ignitable mixture with air. Autoignition Temperature: The minimum temperature required to initiate combustion in air with no other source of ignition. LEL - the lowest percent of vapor in air, by volume, that will explode or ignite in the presence of an ignition source. UEL - the highest percent of vapor in air, by volume, that will explode or ignite in the presence of an ignition source.

TOXICOLOGICAL INFORMATION:

Possible health hazards as derived from human data, animal studies, or from the results of studies with similar compounds are presented. Definitions of some terms used in this section are: **LD₅₀** - Lethal Dose (solids & liquids) which kills 50% of the exposed animals; **LC₅₀** - Lethal Concentration (gases) which kills 50% of the exposed animals; **ppm** concentration expressed in parts of material per million parts of air or water; **mg/m³** concentration expressed in weight of substance per volume of air; **mg/kg** quantity of material, by weight, administered to a test subject, based on their body weight in kg. Data from several sources are used to evaluate the cancer-causing potential of the material. The sources are: **IARC** - the International Agency for Research on Cancer; **NTP** - the National Toxicology Program, **RTECS** - the Registry of Toxic Effects of Chemical Substances, **OSHA** and **CAL/OSHA**. IARC and NTP rate chemicals on a scale of decreasing potential to cause human cancer with rankings from 1 to 4. Subrankings (2A, 2B, etc.) are also used. Other measures of toxicity include **TDLo**, the lowest dose to cause a symptom and **TCLo** the lowest concentration to cause a symptom; **TD₀₁**, **LDLo**, and **LD₀₁**, or **TC**, **TC₀₁**, **LCLo**, and **LCo**, the lowest dose (or concentration) to cause lethal or toxic effects. **BEI** - Biological Exposure Indices, represent the levels of determinants which are most likely to be observed in specimens collected from a healthy worker who has been exposed to chemicals to the same extent as a worker with inhalation exposure to the TLV. Ecological Information: **EC** is the effect concentration in water.

REGULATORY INFORMATION:

This section explains the impact of various laws and regulations on the material. **EPA** is the U.S. Environmental Protection Agency. **WHMIS** is the Canadian Workplace Hazardous Materials Information System. **DOT** and **TC** are the U.S. Department of Transportation and the Transport Canada, respectively. Superfund Amendments and Reauthorization Act (**SARA**); the Canadian Domestic/Non-Domestic Substances List (**DSL/NDL**); the U.S. Toxic Substance Control Act (**TSCA**); Marine Pollutant status according to the **DOT**; the Comprehensive Environmental Response, Compensation, and Liability Act (**CERCLA** or **Superfund**); and various state regulations.



Fisher Scientific

Part of Thermo Fisher Scientific

SAFETY DATA SHEET

Creation Date 27-Jan-2010

Revision Date 02-Oct-2015

Revision Number 2

1. Identification

Product Name	Methylene chloride
Cat No. :	D37-1; D37-4; D37-20; D37-200; D37-200LC; D37-500; D37FB-19; D37FB-50; D37FB-115; D37FB-200; D37POP-19; D37POPB-50; D37POPB-200; D37RB-19; D37RB-50; D37RB-115; D37RB-200; D37RS-19; D37RS-28; D37RS-50; D37RS-115; D37RS-200; D37SK-4; D37SK-4LC; D37SS-28; D37SS-50; D37SS-115; D37SS-200; D37SS-1350
Synonyms	Dichloromethane; DCM
Recommended Use	Laboratory chemicals.
Uses advised against	No Information available
<u>Details of the supplier of the safety data sheet</u>	

Company Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100	Emergency Telephone Number CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887
---	--

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin Corrosion/Irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Carcinogenicity	Category 1B
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Central nervous system (CNS), Respiratory system.	
Specific target organ toxicity - (repeated exposure)	Category 2
Target Organs - Liver, Kidney, Blood.	

Label Elements

Signal Word
Danger

Hazard Statements
Causes skin irritation
Causes serious eye irritation

May cause respiratory irritation
 May cause drowsiness or dizziness
 May cause cancer
 May cause damage to organs through prolonged or repeated exposure



Precautionary Statements

Prevention

Obtain special instructions before use
 Do not handle until all safety precautions have been read and understood
 Use personal protective equipment as required
 Wash face, hands and any exposed skin thoroughly after handling
 Wear eye/face protection
 Do not breathe dust/fume/gas/mist/vapors/spray
 Use only outdoors or in a well-ventilated area

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

IF ON SKIN: Wash with plenty of soap and water
 If skin irritation occurs: Get medical advice/attention
 Take off contaminated clothing and wash before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
 If eye irritation persists: Get medical advice/attention

Storage

Store locked up
 Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

WARNING! This product contains a chemical known in the State of California to cause cancer, birth defects or other reproductive harm.

3. Composition / information on ingredients

Component	CAS-No	Weight %
Methylene chloride	75-09-2	>99.5
Methyl alcohol	67-56-1	0 - 0.4
Cyclohexene	110-83-8	0 - 0.01
2-Methyl-2-butene	513-35-9	0 - 0.01

4. First-aid measures

General Advice

If symptoms persist, call a physician.

Eye Contact

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
 Obtain medical attention.

Skin Contact

Wash off immediately with plenty of water for at least 15 minutes. Obtain medical attention.

Inhalation	Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.
Ingestion	Do not induce vomiting. Call a physician or Poison Control Center immediately.
Most important symptoms/effects	Breathing difficulties. . Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	556 °C / 1032.8 °F
Explosion Limits	
Upper	23 vol %
Lower	13 vol %
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Thermal decomposition can lead to release of irritating gases and vapors. Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO₂) Hydrogen chloride gas Phosgene

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
2

Flammability
1

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Use personal protective equipment. Ensure adequate ventilation. Avoid contact with skin, eyes and clothing. Keep people away from and upwind of spill/leak.
Environmental Precautions	Should not be released into the environment. See Section 12 for additional ecological information.

Methods for Containment and Clean Up Soak up with inert absorbent material. Keep in suitable, closed containers for disposal.

7. Handling and storage

Handling	Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Use only under a chemical fume hood.
Storage	Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Methylene chloride	TWA: 50 ppm	(Vacated) TWA: 500 ppm (Vacated) STEL: 2000 ppm (Vacated) Ceiling: 1000 ppm TWA: 25 ppm STEL: 125 ppm	IDLH: 2300 ppm
Methyl alcohol	TWA: 200 ppm STEL: 250 ppm Skin	(Vacated) TWA: 200 ppm (Vacated) TWA: 260 mg/m ³ (Vacated) STEL: 250 ppm (Vacated) STEL: 325 mg/m ³ Skin TWA: 200 ppm TWA: 260 mg/m ³	IDLH: 6000 ppm TWA: 200 ppm TWA: 260 mg/m ³ STEL: 250 ppm STEL: 325 mg/m ³
Cyclohexene	TWA: 300 ppm	(Vacated) TWA: 300 ppm (Vacated) TWA: 1015 mg/m ³ TWA: 300 ppm TWA: 1015 mg/m ³	IDLH: 2000 ppm TWA: 300 ppm TWA: 1015 mg/m ³

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Methylene chloride	TWA: 50 ppm TWA: 174 mg/m ³	TWA: 100 ppm TWA: 330 mg/m ³ STEL: 500 ppm STEL: 1740 mg/m ³	TWA: 50 ppm
Methyl alcohol	TWA: 200 ppm TWA: 262 mg/m ³ STEL: 250 ppm STEL: 328 mg/m ³ Skin	TWA: 200 ppm TWA: 260 mg/m ³ STEL: 250 ppm STEL: 310 mg/m ³	TWA: 200 ppm STEL: 250 ppm Skin
Cyclohexene	TWA: 300 ppm TWA: 1010 mg/m ³	TWA: 300 ppm TWA: 1015 mg/m ³	TWA: 300 ppm

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures

Use only under a chemical fume hood. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment**Eye/face Protection**

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Liquid
Appearance	Colorless
Odor	sweet
Odor Threshold	No information available
pH	Not applicable
Melting Point/Range	-97 °C / -142.6 °F
Boiling Point/Range	39 °C / 102.2 °F
Flash Point	No information available

Evaporation Rate	No information available
Flammability (solid,gas)	Not applicable
Flammability or explosive limits	
Upper	23 vol %
Lower	13 vol %
Vapor Pressure	20 mmHg @ 3502°C
Vapor Density	2.93 (Air = 1.0)
Specific Gravity	1.33
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	556 °C / 1032.8 °F
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C H ₂ Cl ₂
Molecular Weight	84.93

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products. Excess heat.
Incompatible Materials	Strong oxidizing agents, Strong acids, Amines
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂), Hydrogen chloride gas, Phosgene
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Methylene chloride	> 2000 mg/kg (Rat)	> 2000 mg/kg (Rat)	53 mg/L (Rat) 6 h 76000 mg/m ³ (Rat) 4 h
Methyl alcohol	LD50 = 6200 mg/kg (Rat)	LD50 = 15800 mg/kg (Rabbit)	64000 ppm (Rat) 4 h 83.2 mg/L (Rat) 4 h
Cyclohexene	LD50 = 2400 µL/kg (Rat)	>200 mg/kg (Rat)	>21.6 mg/L/4h (rat)
2-Methyl-2-butene	700-2600 mg/kg (Rat)	>2000 mg/kg (Rat)	LC50 > 61000 ppm (Rat) 4 h

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation	Irritating to eyes and skin
Sensitization	No information available
Carcinogenicity	The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Methylene chloride	75-09-2	Group 2A	Reasonably Anticipated	A3	X	A3
Methyl alcohol	67-56-1	Not listed	Not listed	Not listed	Not listed	Not listed

Cyclohexene	110-83-8	Not listed	Not listed	Not listed	Not listed	Not listed
2-Methyl-2-butene	513-35-9	Not listed	Not listed	Not listed	Not listed	Not listed

IARC: (International Agency for Research on Cancer)

IARC: (International Agency for Research on Cancer)

NTP: (National Toxicity Program)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans

Group 2B - Possibly Carcinogenic to Humans

NTP: (National Toxicity Program)

Known - Known Carcinogen

Reasonably Anticipated - Reasonably Anticipated to be a Human Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

A1 - Known Human Carcinogen

A2 - Suspected Human Carcinogen

A3 - Animal Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

Mexico - Occupational Exposure Limits - Carcinogens

Mexico - Occupational Exposure Limits - Carcinogens

A1 - Confirmed Human Carcinogen

A2 - Suspected Human Carcinogen

A3 - Confirmed Animal Carcinogen

A4 - Not Classifiable as a Human Carcinogen

A5 - Not Suspected as a Human Carcinogen

Mutagenic Effects

Mutagenic effects have occurred in microorganisms.

Reproductive Effects

Experiments have shown reproductive toxicity effects on laboratory animals.

Developmental Effects

Developmental effects have occurred in experimental animals.

Teratogenicity

No information available.

STOT - single exposure

Central nervous system (CNS) Respiratory system

STOT - repeated exposure

Liver Kidney Blood

Aspiration hazard

No information available

Symptoms / effects, both acute and delayed

Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting

Endocrine Disruptor Information

No information available

Other Adverse Effects

Tumorigenic effects have been reported in experimental animals. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Methylene chloride	EC50:>660 mg/L/96h	Pimephales promelas: LC50:193 mg/L/96h	EC50: 1 mg/L/24 h EC50: 2.88 mg/L/15 min	EC50: 140 mg/L/48h
Methyl alcohol	Not listed	Pimephales promelas: LC50 > 10000 mg/L 96h	EC50 = 39000 mg/L 25 min EC50 = 40000 mg/L 15 min EC50 = 43000 mg/L 5 min	EC50 > 10000 mg/L 24h
Cyclohexene	Not listed	Poecillia reticulata: 7.1 mg/L/96h	Not listed	Daphnia: EC50: 5.3 mg/L/48h
2-Methyl-2-butene	Not listed	Not listed	Not listed	EC50: = 3 mg/L, 48h (Daphnia magna)

Persistence and Degradability

Persistence is unlikely based on information available.

Bioaccumulation/ Accumulation

No information available.

Mobility

Will likely be mobile in the environment due to its volatility.

Component	log Pow
Methylene chloride	1.25
Methyl alcohol	-0.74

Cyclohexene	3.27
-------------	------

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Methylene chloride - 75-09-2	U080	-
Methyl alcohol - 67-56-1	U154	-

14. Transport information

DOT

UN-No UN1593
 Proper Shipping Name DICHLOROMETHANE
 Hazard Class 6.1
 Packing Group III

TDG

UN-No UN1593
 Proper Shipping Name DICHLOROMETHANE
 Hazard Class 6.1
 Packing Group III

IATA

UN-No UN1593
 Proper Shipping Name Dichloromethane
 Hazard Class 6.1
 Packing Group III

IMDG/IMO

UN-No UN1593
 Proper Shipping Name Dichloromethane
 Hazard Class 6.1
 Packing Group III

15. Regulatory information

All of the components in the product are on the following Inventory lists: X = listed

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Methylene chloride	X	X	-	200-838-9	-		X	X	X	X	X
Methyl alcohol	X	X	-	200-659-6	-		X	X	X	X	X
Cyclohexene	X	X	-	203-807-8	-		X	X	X	X	X
2-Methyl-2-butene	X	X	-	208-156-3	-		X	X	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b)

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Methylene chloride	75-09-2	>99.5	0.1
Methyl alcohol	67-56-1	0 - 0.4	1.0

SARA 311/312 Hazard Categories

Acute Health Hazard	Yes
Chronic Health Hazard	Yes
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Methylene chloride	-	-	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Methylene chloride	X		-
Methyl alcohol	X		-

OSHA Occupational Safety and Health Administration

Component	Specifically Regulated Chemicals	Highly Hazardous Chemicals
Methylene chloride	125 ppm STEL 12.5 ppm Action Level 25 ppm TWA	-

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Methylene chloride	1000 lb 1 lb	-
Methyl alcohol	5000 lb	-

California Proposition 65 This product contains the following proposition 65 chemicals

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Methylene chloride	75-09-2	Carcinogen	200 µg/day 50 µg/day	Carcinogen
Methyl alcohol	67-56-1	Developmental	-	Developmental

U.S. State Right-to-Know Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Methylene chloride	X	X	X	X	X
Methyl alcohol	X	X	X	X	X
Cyclohexene	X	X	X	-	X
2-Methyl-2-butene	X	X	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ):	Y
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D1B Toxic materials
D2A Very toxic materials

**16. Other information**


Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date 27-Jan-2010
Revision Date 02-Oct-2015
Print Date 02-Oct-2015
Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



Health	2
Fire	2
Reactivity	0
Personal Protection	E

Material Safety Data Sheet Naphthalene MSDS

Section 1: Chemical Product and Company Identification

Product Name: Naphthalene

Catalog Codes: SLN1789, SLN2401

CAS#: 91-20-3

RTECS: QJ0525000

TSCA: TSCA 8(b) inventory: Naphthalene

CI#: Not available.

Synonym:

Chemical Name: Not available.

Chemical Formula: C₁₀H₈

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Naphthalene	91-20-3	100

Toxicological Data on Ingredients: Naphthalene: ORAL (LD50): Acute: 490 mg/kg [Rat]. 533 mg/kg [Mouse]. 1200 mg/kg [Guinea pig]. DERMAL (LD50): Acute: 20001 mg/kg [Rabbit]. VAPOR (LC50): Acute: 170 ppm 4 hour(s) [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Very hazardous in case of ingestion. Hazardous in case of eye contact (irritant), of inhalation. Slightly hazardous in case of skin contact (irritant, permeator). Severe over-exposure can result in death.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Classified Development toxin [POSSIBLE]. The substance is toxic to blood, kidneys, the nervous system, the reproductive system, liver, mucous membranes, gastrointestinal tract, upper respiratory tract, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to an highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Do not use an eye ointment. Seek medical attention.

Skin Contact:

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

Serious Skin Contact: Not available.

Inhalation: Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

Ingestion:

Do not induce vomiting. Examine the lips and mouth to ascertain whether the tissues are damaged, a possible indication that the toxic material was ingested; the absence of such signs, however, is not conclusive. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 567°C (1052.6°F)

Flash Points: CLOSED CUP: 88°C (190.4°F). OPEN CUP: 79°C (174.2°F).

Flammable Limits: LOWER: 0.9% UPPER: 5.9%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances: Not available.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

Flammable solid. **SMALL FIRE:** Use DRY chemical powder. **LARGE FIRE:** Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill: Use appropriate tools to put the spilled solid in a convenient waste disposal container.

Large Spill:

Flammable solid. Stop leak if without risk. Do not touch spilled material. Use water spray curtain to divert vapor drift. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep locked up Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe dust. Avoid contact with eyes Wear suitable protective clothing In case of insufficient ventilation, wear suitable respiratory equipment If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents.

Storage:

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. Keep container dry. Keep in a cool place.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection:

Splash goggles. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

Israel: TWA: 10 (ppm) STEL: 15 (ppm) from ACGIH (TLV) [1995] TWA: 52 STEL: 79 (mg/m³) from ACGIH [1995]
Australia: STEL: 15 (ppm) Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid. (Crystalline solid.)

Odor: Aromatic.

Taste: Not available.

Molecular Weight: 128.19 g/mole

Color: White.

pH (1% soln/water): Not available.

Boiling Point: 218°C (424.4°F)

Melting Point: 80.2°C (176.4°F)

Critical Temperature: Not available.

Specific Gravity: 1.162 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: 4.4 (Air = 1)

Volatility: Not available.

Odor Threshold: 0.038 ppm

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties:

Partially dispersed in hot water, methanol, n-octanol. Very slightly dispersed in cold water. See solubility in methanol, n-octanol.

Solubility:

Partially soluble in methanol, n-octanol. Very slightly soluble in cold water, hot water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances: Highly reactive with oxidizing agents.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: May attack some forms of rubber and plastic

Polymerization: No.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Dermal contact. Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 490 mg/kg [Rat]. Acute dermal toxicity (LD50): 20001 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 170 ppm 4 hour(s) [Rat].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. DEVELOPMENTAL TOXICITY: Classified Development toxin [POSSIBLE]. The substance is toxic to blood, kidneys, the nervous system, the reproductive system, liver, mucous membranes, gastrointestinal tract, upper respiratory tract, central nervous system (CNS).

Other Toxic Effects on Humans:

Very hazardous in case of ingestion. Hazardous in case of inhalation. Slightly hazardous in case of skin contact (irritant, permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: Not available.

Special Remarks on other Toxic Effects on Humans: Not available.

Section 12: Ecological Information

Ecotoxicity: Ecotoxicity in water (LC50): 305.2 ppm 96 hour(s) [Trout].

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are more toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification: CLASS 4.1: Flammable solid.

Identification: : Naphthalene, refined : UN1334 PG: III

Special Provisions for Transport: Marine Pollutant

Section 15: Other Regulatory Information

Federal and State Regulations:

Rhode Island RTK hazardous substances: Naphthalene Pennsylvania RTK: Naphthalene Florida: Naphthalene Minnesota: Naphthalene Massachusetts RTK: Naphthalene TSCA 8(b) inventory: Naphthalene TSCA 8(a) PAIR: Naphthalene TSCA 8(d) H and S data reporting: Naphthalene: 06/01/87 SARA 313 toxic chemical notification and release reporting: Naphthalene: 1% CERCLA: Hazardous substances.: Naphthalene: 100 lbs. (45.36 kg)

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada):

CLASS B-4: Flammable solid. CLASS D-1B: Material causing immediate and serious toxic effects (TOXIC). CLASS D-2B: Material causing other toxic effects (TOXIC).

DSCL (EEC):

R36- Irritating to eyes. R40- Possible risks of irreversible effects. R48/22- Harmful: danger of serious damage to health by prolonged exposure if swallowed. R48/23- Toxic: danger of serious damage to health by prolonged exposure through inhalation. R63- Possible risk of harm to the unborn child.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 2

Reactivity: 0

Personal Protection: E

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 2

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/11/2005 01:30 PM

Last Updated: 11/06/2008 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Version 4.4
Revision Date 11/04/2015
Print Date 12/17/2015

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Butylbenzene

Product Number : B90203
Brand : Aldrich

CAS-No. : 104-51-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H226

Flammable liquid and vapour.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P273

Avoid release to the environment.

P280

Wear protective gloves/ protective clothing/ eye protection/ face

P303 + P361 + P353	protection. IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	1-Phenylbutane
Formula	:	C ₁₀ H ₁₄
Molecular weight	:	134.22 g/mol
CAS-No.	:	104-51-8
EC-No.	:	203-209-7

Hazardous components

Component	Classification	Concentration
Butylbenzene		
	Flam. Liq. 3; Aquatic Acute 1; Aquatic Chronic 1; H226, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge. For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Fluorinated rubber
Minimum layer thickness: 0.7 mm
Break through time: 480 min
Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -88 °C (-126 °F) - lit. |
| f) Initial boiling point and boiling range | 183 °C (361 °F) - lit. |
| g) Flash point | 59.0 °C (138.2 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 5.8 %(V)
Lower explosion limit: 0.8 %(V) |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 0.86 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | insoluble |
| o) Partition coefficient: n-octanol/water | log Pow: 4.26 |
| p) Auto-ignition temperature | 412.0 °C (773.6 °F) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |

- s) Explosive properties No data available
- t) Oxidizing properties No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: CY9070000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - Daphnia magna (Water flea) - 0.34 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 2709 Class: 3 Packing group: III

Proper shipping name: Butyl benzenes

Marine pollutant: yes

Poison Inhalation Hazard: No

IMDG

UN number: 2709 Class: 3 Packing group: III EMS-No: F-E, S-D

Proper shipping name: BUTYLBENZENES

Marine pollutant: yes

IATA

UN number: 2709 Class: 3 Packing group: III

Proper shipping name: Butylbenzenes

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Butylbenzene	104-51-8	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Butylbenzene	104-51-8	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Butylbenzene	104-51-8	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information
Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.4

Revision Date: 11/04/2015

Print Date: 12/17/2015

SAFETY DATA SHEET

Version 5.4
Revision Date 06/18/2015
Print Date 02/23/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Hexane

Product Number : 296090
Brand : Sigma-Aldrich
Index-No. : 601-037-00-0

CAS-No. : 110-54-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225
Skin irritation (Category 2), H315
Reproductive toxicity (Category 2), H361
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336
Specific target organ toxicity - repeated exposure, Oral (Category 2), Nervous system, H373
Aspiration hazard (Category 1), H304
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.
H304 May be fatal if swallowed and enters airways.
H315 Causes skin irritation.
H336 May cause drowsiness or dizziness.
H361 Suspected of damaging fertility or the unborn child.
H373 May cause damage to organs (Nervous system) through prolonged or repeated exposure if swallowed.

H411	Toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	n-Hexane
Formula	:	C ₆ H ₁₄
Molecular weight	:	86.18 g/mol
CAS-No.	:	110-54-3
EC-No.	:	203-777-6
Index-No.	:	601-037-00-0
Registration number	:	01-2119480412-44-XXXX

Hazardous components

Component	Classification	Concentration
n-Hexane	Flam. Liq. 2; Skin Irrit. 2; Repr. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H225, H304, H315, H336, H361, H373, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Flash back possible over considerable distance. Container explosion may occur under fire conditions. Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
n-Hexane	110-54-3	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Eye irritation Peripheral neuropathy Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	50.000000 ppm 180.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	500.000000 ppm 1,800.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	50 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Eye irritation Peripheral neuropathy Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	50 ppm 180 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	500 ppm 1,800 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	50 ppm 180 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
n-Hexane	110-54-3	2,5-Hexanedione	0.4000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		2,5-Hexanedione	0.4 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 59 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---------------------------------|---------------------------------------|
| a) Appearance | Form: liquid
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | 7.0 |
| e) Melting point/freezing point | Melting point/range: -95 °C (-139 °F) |
| f) Initial boiling point and | 69 °C (156 °F) |

boiling range

- g) Flash point -25.99 °C (-14.78 °F) - closed cup
- h) Evaporation rate 15.8
- i) Flammability (solid, gas) No data available
- j) Upper/lower flammability or explosive limits Upper explosion limit: 7.7 %(V)
Lower explosion limit: 1.2 %(V)
- k) Vapour pressure 341.3 hPa (256.0 mmHg) at 37.7 °C (99.9 °F)
176.0 hPa (132.0 mmHg) at 20.0 °C (68.0 °F)
- l) Vapour density No data available
- m) Relative density 0.659 g/mL at 25 °C (77 °F)
- n) Water solubility insoluble
- o) Partition coefficient: n-octanol/water log Pow: 3.90 - 4.11
- p) Auto-ignition temperature 234.0 °C (453.2 °F)
- q) Decomposition temperature No data available
- r) Viscosity No data available
- s) Explosive properties No data available
- t) Oxidizing properties No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Exposure to moisture may affect product quality.
Heat, flames and sparks.

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 25,000 mg/kg

LC50 Inhalation - Rat - 4 h - 48000 ppm

Dermal: No data available

No data available

Skin corrosion/irritation

Irritating to skin.

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

Overexposure may cause reproductive disorder(s) based on tests with laboratory animals. Suspected human reproductive toxicant Suspected of damaging fertility.

Specific target organ toxicity - single exposure

May cause drowsiness or dizziness.

Specific target organ toxicity - repeated exposure

Ingestion - May cause damage to organs through prolonged or repeated exposure. - Nervous system

Aspiration hazard

May be fatal if swallowed and enters airways.

Additional Information

RTECS: MN9275000

Prolonged or repeated contact with skin may cause:., defatting, Dermatitis, Contact with eyes can cause:., Redness, Blurred vision, Provokes tears., Effects due to ingestion may include:., Gastrointestinal discomfort, Central nervous system depression, Lung irritation, chest pain, pulmonary edema, giddiness, slowed reaction time, slurred speech, Headache, Dizziness, Drowsiness, Unconsciousness

Testes. - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 2.5 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 3,878.00 mg/l - 48 h

Toxicity to algae EC50 - Chlorella vulgaris (Fresh water algae) - 12,840.00 mg/l - 3 h
EC50 - SKELETOMA - 0.30 mg/l - 8 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1208 Class: 3 Packing group: II
Proper shipping name: Hexanes
Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1208 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: HEXANES
Marine pollutant:yes

IATA

UN number: 1208 Class: 3 Packing group: II
Proper shipping name: Hexanes

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

Massachusetts Right To Know Components

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H361	Suspected of damaging fertility or the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure if swallowed.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.
Repr.	Reproductive toxicity

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.4

Revision Date: 06/18/2015

Print Date: 02/23/2016

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : Propylbenzene

Product Number : P52407
Brand : Aldrich

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052
Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Combustible Liquid

Target Organs

Lungs, Eyes, Kidney

GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.
H304 May be fatal if swallowed and enters airways.
H335 May cause respiratory irritation.
H401 Toxic to aquatic life.

Precautionary statement(s)

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P331 Do NOT induce vomiting.

HMIS Classification

Health hazard: 0
Chronic Health Hazard: *
Flammability: 2
Physical hazards: 0

NFPA Rating

Health hazard: 1
Fire: 2
Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. May cause respiratory tract irritation.
Skin May be harmful if absorbed through skin. May cause skin irritation.
Eyes May cause eye irritation.

Ingestion

Aspiration hazard if swallowed - can enter lungs and cause damage. May be harmful if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : 1-Phenylpropane
Formula : C₉H₁₂
Molecular Weight : 120.19 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
Propylbenzene			
103-65-1	203-132-9	601-024-00-X	-

4. FIRST AID MEASURES**General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES**Suitable extinguishing media**

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**Personal precautions**

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13). Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE**Precautions for safe handling**

Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Store in cool place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Contains no substances with occupational exposure limit values.

Personal protective equipment

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

For prolonged or repeated contact use protective gloves.

Eye protection

Face shield and safety glasses

Skin and body protection

Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form	liquid, clear
Colour	colourless

Safety data

pH	no data available
Melting point	-99 °C (-146 °F) - lit.
Boiling point	159 °C (318 °F) - lit.
Flash point	42.0 °C (107.6 °F) - closed cup
Ignition temperature	450 °C (842 °F)
Lower explosion limit	0.8 %(V)
Upper explosion limit	6 %(V)
Density	0.862 g/cm ³ at 25 °C (77 °F)
Water solubility	slightly soluble

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

Vapours may form explosive mixture with air.

Conditions to avoid

Heat, flames and sparks.

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

11. TOXICOLOGICAL INFORMATION**Acute toxicity**

LD50 Oral - rat - 6,040 mg/kg

Remarks: Behavioral:Somnolence (general depressed activity).

LC50 Inhalation - rat - 2 h - 65000 ppm

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

May cause respiratory irritation.

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

May be fatal if swallowed and enters airways.

Potential health effects

Inhalation	May be harmful if inhaled. May cause respiratory tract irritation.
Ingestion	Aspiration hazard if swallowed - can enter lungs and cause damage. May be harmful if swallowed.
Skin	May be harmful if absorbed through skin. May cause skin irritation.
Eyes	May cause eye irritation.

Signs and Symptoms of Exposure

Damage to the lungs., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Additional Information

RTECS: DA8750000

12. ECOLOGICAL INFORMATION**Toxicity**

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 1.55 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates. Immobilization EC50 - Daphnia magna (Water flea) - 2 mg/l - 24 h

Persistence and degradability

no data available

Bioaccumulative potential

no data available

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Avoid release to the environment.

13. DISPOSAL CONSIDERATIONS

Product

This combustible material may be burned in a chemical incinerator equipped with an afterburner and scrubber. Observe all federal, state, and local environmental regulations. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN-Number: 2364 Class: 3 Packing group: III
Proper shipping name: n-Propyl benzene
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

UN-Number: 2364 Class: 3 Packing group: III EMS-No: F-E, S-D
Proper shipping name: PROPYLBENZENE
Marine pollutant: No

IATA

UN-Number: 2364 Class: 3 Packing group: III
Proper shipping name: n-Propylbenzene

15. REGULATORY INFORMATION

OSHA Hazards

Combustible Liquid

DSL Status

All components of this product are on the Canadian DSL list.

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

Propylbenzene	CAS-No. 103-65-1	Revision Date 2007-03-01
---------------	---------------------	-----------------------------

Pennsylvania Right To Know Components

Propylbenzene	CAS-No. 103-65-1	Revision Date 2007-03-01
---------------	---------------------	-----------------------------

New Jersey Right To Know Components

Propylbenzene	CAS-No. 103-65-1	Revision Date 2007-03-01
---------------	---------------------	-----------------------------

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Further information**

Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.



SAFETY DATA SHEET

Creation Date 01-May-2012

Revision Date 11-Aug-2014

Revision Number 1

1. Identification

Product Name Phenanthrene

Cat No. : AC130090000; AC130090050; AC130090500; AC130095000

Synonyms No information available

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company	Entity / Business Name	Emergency Telephone Number
Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100	Acros Organics One Reagent Lane Fair Lawn, NJ 07410	For information US call: 001-800-ACROS-01 / Europe call: +32 14 57 52 11 Emergency Number US :001-201-796-7100 / Europe : +32 14 57 52 99 CHEMTREC Tel. No. US :001-800-424-9300 / Europe :001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Acute oral toxicity Category 4

Label Elements

Signal Word

Warning

Hazard Statements

Harmful if swallowed



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

Rinse mouth

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Phenanthrene	85-01-8	>95

4. First-aid measures

General Advice	If symptoms persist, call a physician.
Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
Skin Contact	Obtain medical attention. Wash off immediately with plenty of water for at least 15 minutes.
Inhalation	Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.
Ingestion	Clean mouth with water and drink afterwards plenty of water. Get medical attention if symptoms occur.
Most important symptoms/effects Notes to Physician	None reasonably foreseeable. Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Unsuitable Extinguishing Media	No information available
Flash Point Method -	No information available No information available
Autoignition Temperature	Not applicable
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Do not allow run-off from fire fighting to enter drains or water courses.

Hazardous Combustion ProductsCarbon monoxide (CO) Carbon dioxide (CO₂)**Protective Equipment and Precautions for Firefighters**

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPAHealth
1Flammability
1Instability
0Physical hazards
N/A**6. Accidental release measures**

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment. Avoid dust formation.
-----------------------------	---

Environmental Precautions Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up Sweep up or vacuum up spillage and collect in suitable container for disposal. Keep in suitable, closed containers for disposal.

7. Handling and storage

Handling Wear personal protective equipment. Ensure adequate ventilation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Avoid dust formation.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Long sleeved clothing.

Respiratory Protection

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Solid
Appearance	Beige
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	95 - 101 °C / 203 - 213.8 °F
Boiling Point/Range	336 °C / 636.8 °F
Flash Point	No information available
Evaporation Rate	Not applicable
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	1 mmHg @ 116 °C
Vapor Density	Not applicable
Relative Density	1.063
Solubility	Insoluble in water
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	Not applicable
Decomposition temperature	No information available
Viscosity	Not applicable
Molecular Formula	C14 H10
Molecular Weight	178.23

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products. Excess heat. Avoid dust formation.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Phenanthrene	1.8 g/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Phenanthrene	85-01-8	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea

Phenanthrene	Not listed	LC50 = 3.2 mg/L 96h	Not listed	LC50 = 0.35 mg/L 48h
--------------	------------	---------------------	------------	----------------------

Persistence and Degradability Insoluble in water May persist

Bioaccumulation/ Accumulation No information available.

Mobility . Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Phenanthrene	4.46

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN3077
 Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE,SOLID, N.O.S.
 Hazard Class 9
 Packing Group III

TDG

UN-No UN3077
 Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE,SOLID, N.O.S.
 Hazard Class 9
 Packing Group III

IATA

UN-No UN3077
 Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.*
 Hazard Class 9
 Packing Group III

IMDG/IMO

UN-No UN3077
 Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.
 Hazard Class 9
 Packing Group III

15. Regulatory information

All of the components in the product are on the following Inventory lists: X = listed

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Phenanthrene	X	X	-	201-581-5	-		X	X	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Phenanthrene	85-01-8	>95	1.0

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Phenanthrene	-	-	X	X

Clean Air Act Not applicableOSHA Occupational Safety and Health Administration
Not applicable**CERCLA**

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Phenanthrene	5000 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals**State Right-to-Know**

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Phenanthrene	X	X	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations**Mexico - Grade** No information available**Canada**

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class Non-controlled**16. Other information****Prepared By** Regulatory Affairs


Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date 01-May-2012
Revision Date 11-Aug-2014
Print Date 11-Aug-2014
Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



Health	3
Fire	2
Reactivity	0
Personal Protection	J

Material Safety Data Sheet

Phenol MSDS

Section 1: Chemical Product and Company Identification

Product Name: Phenol

Catalog Codes: SLP4453, SLP5251

CAS#: 108-95-2

RTECS: SJ3325000

TSCA: TSCA 8(b) inventory: Phenol

CI#: Not available.

Synonym: Monohydroxybenzene; Benzenol; Phenyl hydroxide; Phenylic acid

Chemical Name: Carboic Acid

Chemical Formula: C₆H₅OH

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Phenol	108-95-2	100

Toxicological Data on Ingredients: Phenol: ORAL (LD50): Acute: 317 mg/kg [Rat]. 270 mg/kg [Mouse]. DERMAL (LD50): Acute: 630 mg/kg [Rabbit]. 669 mg/kg [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Very hazardous in case of skin contact (corrosive, irritant), of eye contact (irritant), of ingestion, of inhalation. Hazardous in case of skin contact (sensitizer, permeator). The amount of tissue damage depends on length of contact. Eye contact can result in corneal damage or blindness. Skin contact can produce inflammation and blistering. Inhalation of dust will produce irritation to gastro-intestinal or respiratory tract, characterized by burning, sneezing and coughing. Severe over-exposure can produce lung damage, choking, unconsciousness or death. Inflammation of the eye is characterized by redness, watering, and itching. Skin inflammation is characterized by itching, scaling, reddening, or, occasionally, blistering.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH, 3 (Not classifiable for human.) by IARC.
MUTAGENIC EFFECTS: Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. **TERATOGENIC EFFECTS:** Not available. **DEVELOPMENTAL TOXICITY:** Not available. The substance may be toxic to kidneys, liver, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage. Repeated

exposure of the eyes to a low level of dust can produce eye irritation. Repeated skin exposure can produce local skin destruction, or dermatitis. Repeated inhalation of dust can produce varying degree of respiratory irritation or lung damage. Repeated exposure to a highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Cold water may be used. Get medical attention immediately.

Skin Contact:

In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Cover the irritated skin with an emollient. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention immediately.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention immediately.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: May be combustible at high temperature.

Auto-Ignition Temperature: 715°C (1319°F)

Flash Points: CLOSED CUP: 79°C (174.2°F). OPEN CUP: 85°C (185°F).

Flammable Limits: LOWER: 1.7% UPPER: 8.6%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances:

Flammable in presence of open flames and sparks, of heat. Non-flammable in presence of shocks.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

Special Remarks on Fire Hazards:

Phenol + nitrides results in heat and flammable gas generation. Phenol + mineral oxidizing acids results in fire. Phenol + calcium hypochlorite is an exothermic reaction producing toxic fumes which may ignite.

Special Remarks on Explosion Hazards:

Phenol + sodium nitrite causes explosion on heating. Peroxydisulfuric acid + phenol causes explosion.

Section 6: Accidental Release Measures

Small Spill: Use appropriate tools to put the spilled solid in a convenient waste disposal container.

Large Spill:

Corrosive solid. Stop leak if without risk. Do not get water inside container. Do not touch spilled material. Use water spray to reduce vapors. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage**Precautions:**

Keep locked up.. Keep container dry. Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk, evaporate the residue under a fume hood. Ground all equipment containing material. Do not ingest. Do not breathe dust. Never add water to this product. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, acids.

Storage:

Air Sensitive. Sensitive to light. Store in light-resistant containers. Moisture sensitive. Keep container tightly closed. Keep container in a cool, well-ventilated area.

Section 8: Exposure Controls/Personal Protection**Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection:

Splash goggles. Synthetic apron. Vapor and dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor and dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 5 (ppm) from ACGIH (TLV) [United States] SKIN TWA: 19 (mg/m³) from ACGIH (TLV) [United States] SKIN TWA: 5 from NIOSH [United States] TWA: 19 (mg/m³) from NIOSH [United States] TWA: 5 (ppm) from OSHA (PEL) [United States] TWA: 19 (mg/m³) from OSHA (PEL) [United States] TWA: 5 (ppm) [Canada] TWA: 19 (mg/m³) [Canada] Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid.

Odor:

Distinct, aromatic, somewhat sickening sweet and acrid

Taste: Burning.

Molecular Weight: 94.11 g/mole

Color: Colorless to light pink

pH (1% soln/water): Not available.

Boiling Point: 182°C (359.6°F)

Melting Point: 42°C (107.6°F)

Critical Temperature: 694.2 (1281.6°F)

Specific Gravity: 1.057 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: 3.24 (Air = 1)

Volatility: Not available.

Odor Threshold: 0.048 ppm

Water/Oil Dist. Coeff.: The product is more soluble in oil; $\log(\text{oil/water}) = 1.5$

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water, methanol, diethyl ether, acetone.

Solubility:

Easily soluble in methanol, diethyl ether. Soluble in cold water, acetone. Solubility in water: 1g/15 ml water. Soluble in benzene. Very soluble in alcohol, chloroform, glycerol, petroleum, carbon disulfide, volatile and fixed oils, aqueous alkali hydroxides, carbon tetrachloride, acetic acid, liquid sulfur dioxide. Almost insoluble in petroleum ether. Miscible in acetone. Sparingly soluble in mineral oil.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Heat, ignition sources (flames, sparks), light, incompatible materials

Incompatibility with various substances: Reactive with oxidizing agents, metals, acids, alkalis.

Corrosivity:

Extremely corrosive in presence of copper. Slightly corrosive in presence of stainless steel(304), of stainless steel(316). Non-corrosive in presence of glass, of aluminum.

Special Remarks on Reactivity:

Air and light sensitive. Prone to redden on exposure to light and air. Incompatible with aluminum chloride, peroxydisulfuric acid, acetaldehyde, sodium nitrite, boron trifluoride diethyl ether + 1,3-butadiene, isocyanates, nitrides, mineral oxidizing acids, calcium hypochlorite, halogens, formaldehyde, metals and alloys, lead, zinc, magnesium and their alloys, plastics, rubber, coatings, sodium nitrate + trifluoroacetic acid. Phenol + isocyanates results in heat generation, and violent polymerization. Phenol + 1,3-butadiene and boron trifluoride diethyl ether complex results in intense exothermic reaction. Phenol + acetaldehyde results in violent condensation.

Special Remarks on Corrosivity:

Minor corrosive effect on bronze. Severe corrosive effect on brass.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Dermal contact. Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

Acute oral toxicity (LD50): 270 mg/kg [Mouse]. Acute dermal toxicity (LD50): 630 mg/kg [Rabbit].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH, 3 (Not classifiable for human.) by IARC.
MUTAGENIC EFFECTS: Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. May cause damage to the following organs: kidneys, liver, central nervous system (CNS).

Other Toxic Effects on Humans:

Very hazardous in case of skin contact (corrosive, irritant), of ingestion, . Hazardous in case of skin contact (sensitizer, permeator), of eye contact (corrosive), of inhalation (lung corrosive).

Special Remarks on Toxicity to Animals:

Lowest Published Lethal Dose: LDL [Human] - Route: Oral; Dose: 140 mg/kg LDL [Infant] - Route: Oral; Dose: 10,000 mg/kg

Special Remarks on Chronic Effects on Humans:

Animal: passes through the placental barrier. May cause adverse reproductive effects and birth defects (teratogenic)
Embryotoxic and/or foetotoxic in animal. May affect genetic material (mutagenic).

Special Remarks on other Toxic Effects on Humans:**Section 12: Ecological Information****Ecotoxicity:**

Ecotoxicity in water (LC50): 125 mg/l 24 hours [Fish (Goldfish)]. >50 mg/l 1 hours [Fish (Fathead minnow)]. >50 mg/l 24 hours [Fish (Fathead minnow)]. >33 mg/l 72 hours [Fish (Fathead minnow)]. >33 ppm 96 hours [Fish (Fathead minnow)].

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are less toxic than the product itself.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 6.1: Poisonous material.

Identification: : Phenol, solid UNNA: 1671 PG: II

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information**Federal and State Regulations:**

Connecticut hazardous material survey.: Phenol Illinois toxic substances disclosure to employee act: Phenol Illinois chemical safety act: Phenol New York release reporting list: Phenol Rhode Island RTK hazardous substances: Phenol Pennsylvania RTK: Phenol Minnesota: Phenol Massachusetts RTK: Phenol Massachusetts spill list: Phenol New Jersey: Phenol New Jersey spill list: Phenol Louisiana RTK reporting list: Phenol Louisiana spill reporting: Phenol TSCA 8(b) inventory: Phenol TSCA 4(a) proposed test rules: Phenol TSCA 8(a) IUR: Phenol TSCA 8(d) H and S data reporting: Phenol: effective: 6/1/87; sunset:

6/01/97 SARA 302/304/311/312 extremely hazardous substances: Phenol SARA 313 toxic chemical notification and release reporting: Phenol CERCLA: Hazardous substances.: Phenol: 1000 lbs. (453.6 kg)

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada):

CLASS D-1A: Material causing immediate and serious toxic effects (VERY TOXIC). CLASS D-2A: Material causing other toxic effects (VERY TOXIC). CLASS E: Corrosive solid.

DSCL (EEC):

R24/25- Toxic in contact with skin and if swallowed. R34- Causes burns. R40- Possible risks of irreversible effects. R43- May cause sensitization by skin contact. R52- Harmful to aquatic organisms. S1/2- Keep locked up and out of the reach of children. S24- Avoid contact with skin. S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S28- After contact with skin, wash immediately with plenty of water S37/39- Wear suitable gloves and eye/face protection. S45- In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). S46- If swallowed, seek medical advice immediately and show this container or label. S56- Dispose of this material and its container at hazardous or special waste collection point.

HMIS (U.S.A.):

Health Hazard: 3

Fire Hazard: 2

Reactivity: 0

Personal Protection: j

National Fire Protection Association (U.S.A.):

Health: 4

Flammability: 2

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Synthetic apron. Vapor and dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/10/2005 11:17 AM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Version 4.6
Revision Date 02/25/2016
Print Date 03/03/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Propylene

Product Number : 295663
Brand : Aldrich
Index-No. : 601-011-00-9

CAS-No. : 115-07-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable gases (Category 1), H220
Gases under pressure (Liquefied gas), H280
Simple Asphyxiant,

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H220 : Extremely flammable gas.
H280 : Contains gas under pressure; may explode if heated.
May displace oxygen and cause rapid suffocation.

Precautionary statement(s)

P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P377 : Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
P381 : Eliminate all ignition sources if safe to do so.
P410 + P403 : Protect from sunlight. Store in a well-ventilated place.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : Propene

Formula : C₃H₆

Molecular weight : 42.08 g/mol

CAS-No. : 115-07-1

EC-No. : 204-062-1

Index-No. : 601-011-00-9

Hazardous components

Component	Classification	Concentration
Propene		
	Flam. Gas 1; Press. Gas Liquefied gas; SA ; H220, H280,	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Clean up promptly by sweeping or vacuum.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Contents under pressure.

Storage class (TRGS 510): Gases

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Propene	115-07-1	TWA	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Upper Respiratory Tract irritation Asphyxia Not classifiable as a human carcinogen		
		TWA	500.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Asphyxia Not classifiable as a human carcinogen		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 60 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: gaseous, liquid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -185 °C (-301 °F) - lit. |
| f) Initial boiling point and boiling range | -47.7 °C (-53.9 °F) - lit. |
| g) Flash point | -107.99 °C (-162.38 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 11.1 %(V)
Lower explosion limit: 2 %(V) |
| k) Vapour pressure | 15,604 hPa (11,704 mmHg) at 37.7 °C (99.9 °F) |
| l) Vapour density | 1.45 - (Air = 1.0) |
| m) Relative density | No data available |

- | | |
|---|-------------------|
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

Relative vapour density 1.45 - (Air = 1.0)

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents, Strong acids

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Propene)
NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: UC6740000

Dizziness, Headache, Central nervous system depression

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1077 Class: 2.1

Proper shipping name: Propylene

Reportable Quantity (RQ):

Poison Inhalation Hazard: No

IMDG

UN number: 1077 Class: 2.1
Proper shipping name: PROPYLENE

EMS-No: F-D, S-U

IATA

UN number: 1077 Class: 2.1
Proper shipping name: Propylene
IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Propene	115-07-1	1993-04-24

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Propene	115-07-1	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Propene	115-07-1	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Propene	115-07-1	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

	May displace oxygen and cause rapid suffocation.
Flam. Gas	Flammable gases
H220	Extremely flammable gas.
H280	Contains gas under pressure; may explode if heated.
Press. Gas	Gases under pressure
SA	Simple Asphyxiant

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	4
Physical Hazard	3

NFPA Rating

Health hazard:	0
Fire Hazard:	4
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 02/25/2016

Print Date: 03/03/2016



Fisher Scientific

Part of Thermo Fisher Scientific

SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Pyrene, ca 96%

Cat No. : AC157651000; AC157655000

Synonyms Benzo[def]phenanthrene

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

Classification under 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Label Elements

None required

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Pyrene	129-00-0	96.0

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes.

Inhalation	Move to fresh air.
Ingestion	Do not induce vomiting.
Most important symptoms/effects Notes to Physician	No information available. Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media	No information available
Flash Point Method -	°C No information available
Autoignition Temperature	No information available
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

None known

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
1	1	0	N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment.
Environmental Precautions	See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up No information available.

7. Handling and storage

Handling	Ensure adequate ventilation.
Storage	Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

<u>Exposure Guidelines</u>	This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.
Engineering Measures	Ensure adequate ventilation, especially in confined areas.
<u>Personal Protective Equipment</u>	
Eye/face Protection	Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder Solid
Appearance	Yellow
Odor	Odorless
Odor Threshold	No information available
pH	
Melting Point/Range	156 °C
Boiling Point/Range	°C @ 760 mmHg
Flash Point	°C
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	< 1 mmHg @ 20 °C
Vapor Density	No information available
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C16H10
Molecular Weight	202.25

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	None under normal use conditions
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Pyrene	2700 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic No information available

Products**Delayed and immediate effects as well as chronic effects from short and long-term exposure**

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Pyrene	129-00-0	group 3	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Pyrene	Not listed	Oncorhynchus mykiss: LC50 > 2mg/L 96h	Not listed	EC50 48h 1.8 mg/L EC50 48h 0.002-0.003 mg/L

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility No information available.

Component	log Pow
Pyrene	4.88

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT Not regulated

TDG Not regulated

IATA Not regulated

IMDG/IMO Not regulated

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Pyrene	X	X	-	204-927-3	-		X	X	X	X	-

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazardous Categorization

Acute Health Hazard	No
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Pyrene	-	-	X	X

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA
Not applicable

Component	Hazardous Substances RQs	CERCLA EHS RQs
Pyrene	5000 lb	5000 lb

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Pyrene	X	X	X	X	-

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class Non-controlled

16. Other information

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Revision Date 10-Feb-2015

Print Date 10-Feb-2015

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

SAFETY DATA SHEET

Version 3.14
Revision Date 12/02/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Styrene

Product Number : 240869
Brand : Aldrich
Index-No. : 601-026-00-0

CAS-No. : 100-42-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226
Acute toxicity, Inhalation (Category 4), H332
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Carcinogenicity (Category 2), H351
Reproductive toxicity (Category 2), H361
Specific target organ toxicity - repeated exposure (Category 1), H372
Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.
H315 Causes skin irritation.
H319 Causes serious eye irritation.
H332 Harmful if inhaled.
H351 Suspected of causing cancer.
H361 Suspected of damaging fertility or the unborn child.

H372	Causes damage to organs through prolonged or repeated exposure.
H401	Toxic to aquatic life.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Lachrymator.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : Phenylethylene
Vinylbenzene

Formula : C₈H₈C₈H₈
Molecular weight : 104.15 g/mol
CAS-No. : 100-42-5
EC-No. : 202-851-5
Index-No. : 601-026-00-0

Hazardous components

Component	Classification	Concentration
Styrene	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; Carc. 2; Repr. 2; STOT RE 1; Aquatic Acute 2; H226, H315, H319, H332, H351, H361, H372, H401	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Container explosion may occur under fire conditions., Vapours may form explosive mixture with air.

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

Light sensitive.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Styrene	100-42-5	TWA	50.000000 ppm 215.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	100.000000 ppm 425.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
	Remarks	See Table Z-2		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		
		Peak	600.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		
		TWA	20.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Peripheral neuropathy Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	40.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Peripheral neuropathy Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		

		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		
		Peak	600 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Styrene	100-42-5	Mandelic acid plus phenylglyoxylic acid	400mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
		Styrene	0.2000 mg/l	In venous blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		Mandelic acid plus phenylglyoxylic acid	400mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		Styrene	40 µg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 32 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | sweet |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -31 °C (-24 °F) - lit. |
| f) Initial boiling point and boiling range | 145 - 146 °C (293 - 295 °F) - lit. |
| g) Flash point | 32.0 °C (89.6 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 8.9 %(V)
Lower explosion limit: 1.1 %(V) |
| k) Vapour pressure | 6 hPa (5 mmHg) at 20 °C (68 °F) |
| l) Vapour density | 3.6 |
| m) Relative density | 0.906 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | 0.05 g/l at 25 °C (77 °F) - slightly soluble |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | 490.0 °C (914.0 °F)
480.0 °C (896.0 °F) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

Relative vapour density 3.6

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air. Vapours may form explosive mixture with air.

10.4 Conditions to avoid

May polymerize on exposure to light.

Heat, flames and sparks.

10.5 Incompatible materials

Oxidizing agents, Copper

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - > 6,000 mg/kg

LC50 Inhalation - Rat - 4 h - 12,000 mg/m³

LD50 Dermal - Rat - male and female - > 2,000 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation

(OECD Test Guideline 404)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

Respiratory or skin sensitisation

Maximisation Test (GPMT) - Guinea pig

Does not cause skin sensitisation.

(OECD Test Guideline 406)

Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Styrene)

NTP: Reasonably anticipated to be a human carcinogen (Styrene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

Suspected of damaging the unborn child. Suspected human reproductive toxicant

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

Additional Information

RTECS: WL3675000

Dermatitis, Central nervous system depression, Nausea, Dizziness, Headache, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Endocrine system. -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish	NOEC - Pimephales promelas (fathead minnow) - 4 mg/l - 96 h LC50 - Pimephales promelas (fathead minnow) - 32 mg/l - 96 h LOEC - Pimephales promelas (fathead minnow) - 7.6 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 4.7 mg/l - 48 h (OECD Test Guideline 202)
Toxicity to algae	IC50 - Pseudokirchneriella subcapitata (green algae) - 1.4 mg/l - 72 h

12.2 Persistence and degradability

Biodegradability aerobic - Exposure time 28 d
Result: > 60 % - Readily biodegradable

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life.

No data available

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 2055 Class: 3 Packing group: III
Proper shipping name: Styrene monomer, stabilized
Reportable Quantity (RQ): 1000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 2055 Class: 3 Packing group: III EMS-No: F-E, S-D
Proper shipping name: STYRENE MONOMER, STABILIZED

IATA

UN number: 2055 Class: 3 Packing group: III
Proper shipping name: Styrene monomer, stabilized

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Styrene	100-42-5	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Styrene	100-42-5	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Styrene	100-42-5	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Styrene	100-42-5	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H351	Suspected of causing cancer.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H401	Toxic to aquatic life.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard: 2
Fire Hazard: 3
Reactivity Hazard: 0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.14

Revision Date: 12/02/2015

Print Date: 02/18/2016

SAFETY DATA SHEET

Version 3.6
Revision Date 03/03/2015
Print Date 04/01/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : 1,1,2,2-Tetrachloroethane
Product Number : 185434
Brand : Sigma-Aldrich
Index-No. : 602-015-00-3
CAS-No. : 79-34-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA
Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Inhalation (Category 2), H330
Acute toxicity, Dermal (Category 1), H310
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H310 + H330
H411

Fatal in contact with skin or if inhaled
Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P260
P262
P264
P270
P271
P273
P280

Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
Do not get in eyes, on skin, or on clothing.
Wash skin thoroughly after handling.
Do not eat, drink or smoke when using this product.
Use only outdoors or in a well-ventilated area.
Avoid release to the environment.
Wear protective gloves/ protective clothing.

P284	Wear respiratory protection.
P302 + P350 + P310	IF ON SKIN: Gently wash with plenty of soap and water. Immediately call a POISON CENTER or doctor/ physician.
P304 + P340 + P310	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Rapidly absorbed through skin.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: Acetylene tetrachloride
Formula	: C ₂ H ₂ Cl ₄
Molecular weight	: 167.85 g/mol
CAS-No.	: 79-34-5
EC-No.	: 201-197-8
Index-No.	: 602-015-00-3

Hazardous components

Component	Classification	Concentration
1,1,2,2-Tetrachloroethane	Acute Tox. 2; Acute Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H310 + H330, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,1,2,2-Tetrachloroethane	79-34-5	TWA	1.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Liver damage Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		
		TWA	1.000000 ppm 7.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix C See Appendix A		

		Potential for dermal absorption		
		TWA	5.000000 ppm 35.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--------------------|---|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |

e) Melting point/freezing point	Melting point/range: -43 °C (-45 °F) - lit.
f) Initial boiling point and boiling range	147 °C (297 °F) - lit.
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	10.7 hPa (8.0 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	1.586 g/cm ³ at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 5
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Sodium/sodium oxides, Strong bases, Potassium, Nitrates, 2,4-dinitrophenyl disulfide

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 200.0 mg/kg

LC50 Inhalation - Mouse - 2 h - 4,500 mg/m³

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (1,1,2,2-Tetrachloroethane)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: KI8575000

Headache, Nausea, Vomiting, Tremors, Incoordination., fatigue, Dizziness, Anorexia.

Blood -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 20 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - Daphnia magna (Water flea) - 23 mg/l - 48 h

12.2 Persistence and degradability**12.3 Bioaccumulative potential**

Bioaccumulation Lepomis macrochirus (Bluegill) - 14 d
- 0.00962 mg/l

Bioconcentration factor (BCF): 8

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1702 Class: 6.1 Packing group: II
Proper shipping name: 1,1,2,2-Tetrachloroethane
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1702 Class: 6.1 Packing group: II EMS-No: F-A, S-A
Proper shipping name: 1,1,2,2-TETRACHLOROETHANE
Marine pollutant: yes

IATA

UN number: 1702 Class: 6.1 Packing group: II
Proper shipping name: 1,1,2,2-Tetrachloroethane

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,1,2,2-Tetrachloroethane	79-34-5	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,1,2,2-Tetrachloroethane	79-34-5	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,1,2,2-Tetrachloroethane	79-34-5	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,1,2,2-Tetrachloroethane	79-34-5	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
1,1,2,2-Tetrachloroethane	79-34-5	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H310	Fatal in contact with skin.
H310 + H330	Fatal in contact with skin or if inhaled
H330	Fatal if inhaled.

HMIS Rating

Health hazard:	4
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	4
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.6

Revision Date: 03/03/2015

Print Date: 04/01/2016

SAFETY DATA SHEET

Version 4.17
Revision Date 03/03/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Trichlorofluoromethane
Product Number : 254991
Brand : Aldrich
CAS-No. : 75-69-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA
Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Dermal (Category 4), H312

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Warning

Hazard statement(s)
H312 : Harmful in contact with skin.

Precautionary statement(s)
P280 : Wear protective gloves/ protective clothing.
P302 + P352 + P312 : IF ON SKIN: Wash with plenty of soap and water. Call a POISON CENTER or doctor/ physician if you feel unwell.
P363 : Wash contaminated clothing before reuse.
P501 : Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS**3.1 Substances**

Synonyms : Fluorotrichloromethane
CFC-11

Formula : CCl₃F CCl₃F
Molecular weight : 137.37 g/mol
CAS-No. : 75-69-4
EC-No. : 200-892-3

Hazardous components

Component	Classification	Concentration
Trichlorofluoromethane		
	Acute Tox. 4; H312	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas, Hydrogen fluoride

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Contents under pressure.

Storage class (TRGS 510): Non Combustible Liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Trichlorofluoromethane	75-69-4	C	1,000.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Cardiac sensitization Not classifiable as a human carcinogen		
		C	1,000.000000 ppm 5,600.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1,000.000000 ppm 5,600.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 30 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | -110.99 - -109.99 °C (-167.78 - -165.98 °F) |
| f) Initial boiling point and boiling range | 23.7 °C (74.7 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 885.7 hPa (664.3 mmHg) at 20.0 °C (68.0 °F)
2,701.2 hPa (2,026.1 mmHg) at 55.0 °C (131.0 °F) |
| l) Vapour density | No data available |
| m) Relative density | 1.494 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | 1 g/l |
| o) Partition coefficient: n-octanol/water | log Pow: 2.53 |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |

t) Oxidizing properties No data available

9.2 Other safety information

Surface tension 18.0 mN/m at 25.0 °C (77.0 °F)

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Sodium/sodium oxides, Potassium, Magnesium, Aluminum, Zinc

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - > 15,000 mg/kg

LC50 Inhalation - Rat - 0.3 h - 130000 ppm

Remarks: Behavioral:Tremor. Behavioral:Convulsions or effect on seizure threshold. Respiratory disorder

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: PB6125000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated., Nausea, Dizziness, Headache, Vomiting, Diarrhoea, Abdominal pain, Weakness, Unconsciousness

Liver -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 3082

Class: 9

Packing group: III

Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (Trichlorofluoromethane)

Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Trichlorofluoromethane	75-69-4	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

Trichlorofluoromethane	CAS-No. 75-69-4	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

Pennsylvania Right To Know Components

Trichlorofluoromethane	CAS-No. 75-69-4	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

New Jersey Right To Know Components

Trichlorofluoromethane	CAS-No. 75-69-4	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox. H312	Acute toxicity Harmful in contact with skin.
--------------------	---

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	1
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.17

Revision Date: 03/03/2015


Print Date: 02/18/2016

Safety Data Sheets (SDS)

SECTION 1-IDENTIFICATION

Product name: Toluene
Other names:-
Proper shipping name: Toluene
Recommended use of the chemical and restrictions on use: The major use of toluene is as a mixture added to gasoline to improve octane ratings. Used as a solvent for paint, resins, lacquers inks & adhesives. Component of solvent blends and thinners. Used in the manufacture of chemicals, dyes, explosives, benzoic acid. Some grades of toluene may contain traces of xylene and benzene. The use of a quantity of material in an unventilated or confined space may result in increased exposure and an irritating atmosphere developing. Before starting consider control of exposure by mechanical ventilation. WARNING: Intentional misuse by concentrating/inhaling contents may be lethal.
Manufacturer/Supplier Name: Taiwan SM Corp., Kaohsiung plant Address: NO.7, Industrial 1st Rd, Lin-Yuan Kaohsiung County 83203, Taiwan, R.O.C. Phone No.: 886-7-6414511
Emergency phone No./Fax No.: 886-7-6414511 Ext. 221 (on duty), 886-7-6414517 (off duty)/886-7-6423828

SECTION 2-HAZARDS IDENTIFICATION

GHS Classification: Flammable Liquid Category 2 Acute Toxicity (Oral) Category 4 Skin Corrosion/ Irritation Category 2 Serious Eye Damage/ Eye Irritation Category 2 Specific Target Organ Toxicity Repeated Exposure Category 2 Hazardous To The Aquatic Environment (Acute) Category 3 Aspiration Hazard Category 1
GHS Label elements: Hazard symbols 
Signal word Danger
Hazard statements Highly flammable liquid and vapor Harmful if inhaled Causes skin irritation Causes serious eye irritation May cause damage to organs through prolonged or repeated exposure. May cause long lasting harmful effects to aquatic life. May be fatal if swallowed and enters airways.
Precautionary statements Use only in well ventilated area. Control of exposure by mechanical ventilation in an unventilated or confined space. Avoid breathing vapors and contact with skin and eyes. Wear breathing apparatus/protective gloves/face protection. Store in well-ventilated place. Disposal must be in accordance with applicable federal, state, or local regulations.
Other hazards: —

SECTION 3-COMPOSITION/INFORMATION ON INGREDIENTS

CAS No.	Chemical Name	wt% by weight	EINECS No.
00108-88-3	Toluene	97.0 min.	203-625-9
Synonyms	Methylbenzol; Methylbenzene; Toluol; Phenylmethane		

SECTION 4-FIRST AID MEASURES

Description of necessary first aid measures

Eye:

1. Flush immediately with warm water for at least 20 minutes.
2. Ensure complete irrigation of the eye by keeping eyelids apart and away from eye and moving the eyelids by occasionally lifting the upper and lower lids.
3. If pain persists or recurs seek medical attention.
4. Removal of contact lenses after an eye injury should only be undertaken by skilled personnel.

Skin:

1. Removing contaminated clothing, shoes, and leathery wearings, cleaning procedure is available before reused or waste treatment.
2. Washing affected area thoroughly with soap and water for at least 20 minutes.
3. Call a Physician if irritation develops or persists.

Ingestion:

1. If spontaneous vomiting appears imminent or occurs, hold patient's head down, lower than their hips to help avoid possible aspiration of vomits.
2. If victim is conscious and alert, give 2~4 cupfuls of milk/water to dilute the substance in stomach.
3. Never give anything by mouth to an unconscious person.
4. Don't induce vomiting unless directed to do so by medical person.
5. If vomiting occurs, lean patient forward or place on left side (head-down position, if possible) to maintain open airway and prevent aspiration.
6. Then seek for medical attention.

Inhalation:

1. Remove from further exposure and flush thoroughly with air.
2. Lay patient down. Keep warm and rested.
3. Prostheses such as false teeth, which may block airway, should be removed, where possible, prior to initiating first aid procedures.
4. If respiratory irritation, seek immediate medical assistance and call a physician.

Most important symptoms/effects, acute and delayed

Headache, fatigue, drowsiness, insomnia, anorexia and pain in limbs, nervousness, impairment of memory.

Indication of immediate medical attention and special treatment needed, if necessary

For acute or short term repeated exposures to toluene:

Inhalation:

1. Inhalation overexposure can produce toxic effects. Monitor for respiratory distress.
2. If cough or difficulty in breathing develops, evaluate for upper respiratory tract inflammation, bronchitis, and pneumonitis. Administer supplemental oxygen with assisted ventilation, as required.
3. This material (or a component) sensitizes the heart to the effects of sympathomimetic amines. Epinephrine and other sympathomimetic drugs may initiate cardiac arrhythmias in individuals exposed to this material.
4. Administration of sympathomimetic drugs should be avoided.

Ingestion:

1. If ingested, this material presents a significant aspiration and chemical pneumonitis hazard.
2. Induction of emesis is not recommended.
3. Consider activated charcoal and/or gastric lavage.
4. If patient is obtunded, protect the airway by cuffed endotracheal intubation or by placement of the body in a Trendelenburg and left lateral decubitus position.

SECTION 5-FIRE FIGHTING MEASURES

Extinguishing media

Foam · CO₂ · Dry chemical · Water fog.

Specific hazards arising from the chemical

1. Liquid and vapor are highly flammable.
2. Severe fire hazard when exposed to heat, flame and/or oxidizers.
3. Vapor may travel a considerable distance to source of ignition.
4. Heating may cause expansion or decomposition leading to violent rupture of containers.
5. On combustion, may emit toxic fumes of carbon monoxide (CO).

Special protective equipment and precautions for fire-fighters

1. Firefighters must use full bunker gear including NIOSH-approved positive pressure self-contained breathing apparatus to protect against potential hazardous combustion or decomposition products and oxygen deficiencies.
2. Evacuate area and fight the fire from a maximum distance or use unmanned hose holders or monitor nozzles.
3. Cover pooling liquid with foam.
4. Containers can build pressure if exposed to radiant heat; cool adjacent containers with flooding quantities of water until well after the fire is out.
5. Withdraw immediately from the area if there is a rising sound from a venting safety device or discoloration of vessels, tanks, or pipelines.
6. Be aware that burning liquid will float on water.
7. Notify appropriate authorities of potential fire and explosion hazard if liquid enter sewers or waterways

SECTION 6-ACCIDENTAL RELEASE MEASURES**Personal precautions, protective equipment and emergency procedure**

1. Personal protective equipment (specified in Section 8)
Eyes : Chemical safety goggles are recommended, and a face shield is added when needed.
Skin : Wear appropriate protective gloves to avoid skin contact.
Clothing: When direct contact is likely, use rubberized clothings, apron and boots.
Respiratory : When limits are exceeded, wear a respirator approved by NIOSH/MSHA for protection against organic dust, mists and vapors.
2. Remove all sources of ignition. No smoking, naked lights or ignition sources. Ventilate area of leak or spill.
3. Keep unnecessary and unprotected personnel from entering. Evacuate personnel from the danger area. Consult with an expert about the emergency procedures.

Environmental precautions

1. Prevent spillage from entering drains, surface, and groundwater.
2. Contain and recover liquid when possible. Use non-sparking tools and equipment.
3. Collect liquid in an appropriate container or absorb with an inert material (e.g. vermiculite, dry sand, earth), and place in a chemical waste container.
4. Report the accidental spill/release to Local/State government.

Methods and materials for containment and cleaning up

Minor spill:

1. Remove all ignition sources.
2. Clean up all spills immediately.
3. Avoid breathing vapors and contact with skin and eyes.
4. Control personal contact by using protective equipment.
5. Contain and absorb small quantities with vermiculite or other absorbent material.
6. Wipe up.
7. Collect residues in a flammable waste container.

Major spill

1. Clear area of personnel and move upwind.
2. Alert emergency responders and tell them location and nature of hazard.
3. May be violently or explosively reactive.
4. Wear breathing apparatus plus protective gloves.
5. Prevent spillage from entering drains or water course.
6. No smoking, naked lights or ignition sources. Increase ventilation.
7. Stop leak if safe to do so.
8. Water spray or fog may be used to disperse/absorb vapor.
9. Contain spill with sand, earth or vermiculite.
10. Use only spark-free shovels and explosion proof equipment.
11. Collect recoverable product into labeled containers for recycling..
12. Absorb remaining product with sand, earth or vermiculite.
13. Collect solid residues and seal in labeled drums for disposal.
14. Wash area and prevent runoff into drains.
15. If contamination of drains or waterways occurs, advise emergency services.

SECTION 7-HANDLING AND STORAGE**Precautions for safe handling**

1. Wash thoroughly after handling.
2. Use only in well ventilated area.
3. Ground and bond containers when transferring.
4. Use spark-free tools and explosion proof equipment.
5. Empty containers retain product residue (liquid/vapor), and can be dangerous.
6. Do not pressurize, cut, weld, braze, solder, drill, or expose empty containers to heat, sparks or open flames.

Conditions for safe storage, including any incompatibilities

1. Store in original containers in approved flame-proof area.
2. No smoking, naked lights, heat or ignition sources.
3. DO NOT store in pits, depressions, basements or areas where vapors may be trapped.
4. Keep containers securely sealed.
5. Store away from incompatible materials in a cool, dry well ventilated area.
6. Protect containers against physical damage and check regularly for leaks.
7. Keep containers tightly closed and store in a cool, dry, well-ventilated place, plainly labeled, and out of closed vehicles.
8. Ground all equipment containing this material.
9. Observe manufacturer's storing and handling recommendations.
10. Containers should be able to withstand pressures expected from warming and cooling in storage. This flammable liquid should be stored in a separate safety cabinet or room. A refrigerated room is preferable for materials with a flash point temperature lower than 70°F (21°C).

SECTION 8-EXPOSURE CONTROLS, PERSONAL PROTECTION

OSHA - Final PELs : 200 ppm TWA.

OSHA Ceiling : 300ppm.

ACGIH : 50 ppm, skin -potential forcutaneous absorption.

NIOSH : 100 ppm TWA; 375 mg/m³ TWA; 500 ppm IDLH.

Taiwan TWA : 100 ppm (skin).

Taiwan STEL : 125 ppm (skin).

Taiwan Ceiling : -----.

Taiwan BEI : 1 mg/1 (before on duty).

Engineering control

1. Process should be located at least 17 meter (50 feet) away from open flames and all high temperature operations likely to cause ignition of the styrene monomer vapor.
2. In venting styrene monomer vapors, consideration should be given to possible halogenation of the vapors by low concentrations of free chlorine and bromine with the resultant formation of lacrimations.
3. Process should be designed so that the operator is not exposed to direct contact with Toluene or the vapor. The technical problems of designing equipment, providing adequate ventilation and operating procedures which promise maximum security and economy, can best be handled by competent engineers.
4. It is essential for safety that equipment be used and maintained as recommended by the manufacturer.
5. Tanks used to store or process Toluene should be closed vessels vented to a safe point of discharge in the outside atmosphere away from operating stations, roadways, and at least 17 meter (50 feet) from possible sources of ignitions. All sparks, flames, heated surface, or other sources of ignition should be kept away from all vents. It is advisable, to provide suction on vessels when inspection or observation openings are made, to minimize or eliminate escape of vapors.

Personal protective equipment

Eye Protection:

Safety glasses equipped with side shields are recommended as minimum protection in industrial settings. Chemical goggles should be worn during transfer operations or when there is a likelihood of misting, splashing, or spraying of this material. A suitable emergency eye wash water and safety shower should be located near the work station.

Skin protection:

Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Clothing:

Avoid skin contact. Wear long-sleeved fire-retardant garments (e.g., Nomex®) while working with flammable and combustible liquids. Additional chemical-resistant protective gear may be required if splashing or spraying conditions exist. This may include an apron, boots and additional facial protection. If product comes in contact with clothing, immediately remove soaked clothing and shower. Promptly remove and discard contaminated leather goods.

Respirators:

For known vapor concentrations above the occupational exposure guidelines (see below), use a NIOSH-approved organic vapor respirator if adequate protection is provided. Protection factors vary depending upon the type of respirator used. Respirators should be used in accordance with OSHA requirements (29 CFR 1910.134). For airborne vapor concentrations that exceed the recommended protection factors for organic vapor respirators, use a full-face, positive-pressure, supplied air respirator. Due to fire and explosion hazards, do not enter atmospheres containing concentrations greater than 10% of the lower flammable limit of this product.

SECTION 9-PHYSICAL AND CHEMICAL PROPERTIES

Appearance : Transparent liquid	Upper/lower explosive limits : 1.2% ~ 7.1%
Odour : pleasant aromatic petroleum odour	Vapor Pressure : 22 mmHg @20°C/68°F
Odour threshold : 0.16~37 ppm (detect) 1.9~69 ppm (recognition)	Vapor Density : 3.1 (air=1)
PH : Not available	Relative density : 0.86 (water=1)
Melting/Freezing Point : -95 °C	Solubility in water : 54~58 mg/100 ml
Initial boiling point/boiling range : 110.6 °C	Partition coefficient : 2.73 (n-octanol/water)
Flash point : 4.4 °C (closed cup)	Auto-ignition temperature : 480°C
Evaporation Rate : 2.24 (BuAc=1)	Decomposition temperature : Not available
Flammability (solid/gas) : Not available	Viscosity : 0.6 mPa.s max @20°C
Molecular Formula : C ₆ H ₅ CH ₃	Molecular Weight : 92.056

SECTION 10-STABILITY AND REACTIVITY

Reactivity Vapor is explosive when exposed to heat or flame
Chemical stability Stable at room temperature in closed containers under normal storage and handling conditions.
Possibility of hazardous reaction Has not been reported.
Condition to avoid Product is highly flammable – Keep away from sources of ignition. Avoid the higher temperatures. Keep away from open fire, heating elements and heat radiating surface and prevent from forming of the vapours mixtures with air in explosion limits.
Incompatible materials Heat, flame, strong oxidizers, nitric and sulfuric acids, chlorine, nitrogen tetroxide; will attack some forms of plastics, rubber, coatings.
Hazardous decomposition products Carbon monoxide, carbon dioxide, hydrocarbons.

SECTION 11-TOXICOLOGICAL INFORMATION

Routes of exposure Eye, Skin, inhalation, Ingestion.
Symptoms (treatments as indicated in Section 4) Eye: The liquid produces a high level of eye discomfort and is capable of causing pain and severe conjunctivitis. Corneal injury may develop, with possible permanent impairment of vision, if not promptly and adequately treated. There is evidence that material may produce eye irritation in some persons and produce eye damage 24 hours or more after instillation. Severe inflammation may be expected with pain. There may be damage to the cornea. Unless treatment is prompt and adequate there may be permanent loss of vision. Conjunctivitis can occur following repeated exposure. Skin: Contact with the material may damage the health of the individual; systemic effects may result following absorption. The material may cause moderate inflammation of the skin either following direct contact or after a delay of some time. Repeated exposure can cause contact dermatitis which is characterized by redness, swelling and blistering. Entry into the blood-stream, through, for example, cuts, abrasions or lesions, may produce systemic injury with harmful effects. Examine the skin prior to the use of the material and ensure that any external damage is suitably protected. Ingestion: Accidental ingestion of the material may be harmful; animal experiments indicate that ingestion of less than 150 gram may be fatal or may produce serious damage to the health of the individual. Swallowing of the liquid may cause aspiration into the lungs with the risk of chemical pneumonitis; serious consequences may result. (ICSC13733). Considered an unlikely route of entry in commercial/industrial environments. The liquid may produce gastrointestinal discomfort and may be harmful if swallowed. Ingestion may result in nausea, pain and vomiting. Vomit entering the lungs by aspiration may cause potentially lethal chemical pneumonitis. Inhalation: Inhalation of vapours or aerosols (mists, fumes), generated by the material during the course of normal handling, may be damaging to the health of the individual. There is some evidence to suggest that the material can cause respiratory irritation in some persons. The body's response to such irritation can cause further lung damage. Inhalation of vapours may cause drowsiness and dizziness. This may be accompanied by sleepiness, reduced alertness, loss of reflexes, lack of co-ordination, and vertigo. Inhalation of high concentrations of gas/vapour causes lung irritation with coughing and nausea, central nervous depression with headache and dizziness, slowing of reflexes, fatigue and inco-ordination. If exposure to highly concentrated solvent atmosphere is prolonged this may lead to narcosis, unconsciousness, even coma and possible death. The use of a quantity of material in an unventilated or confined space may result in increased exposure and an irritating atmosphere developing. Before starting consider control of exposure by mechanical ventilation.

Chronic exposure: There has been some concern that this material can cause cancer or mutations but there is not enough data to make an assessment. Substance accumulation, in the human body, may occur and may cause some concern following repeated or long-term occupational exposure.

Toxicity

LD50: <870 mg/kg (rat, oral)

LC50: 6000 ppm/6h (rat, inhalation)

Chronic effect

Carcinogenicity:

ACGIH : A4-Not classifiable as a Human Carcinogen.

OSHA : Possible select carcinogen.

IARC : Group 3 carcinogen.

Epide miology: Not available.

Teratogenicity: Teratogenic effects have occurred in experimental animals.

Reproductive Effects: Adverse reproductive effects have occurred in experimental animals.

Neurotoxicity: Not available.

Mutagenicity: Not available.

SECTION 12-ECOLOGICAL INFORMATION

Ecotoxicity

LC₅₀ (96 hr.) Fish: 7.3~22.8 mg/l

EC₅₀ (48 hr.) Water flea: —

Biocentration factor (BCF): 1.67~380

Persistence and degradability

1. The material are expected to form a slick on the surface of waters after release in calm sea conditions. This is expected to evaporate and enter the atmosphere where it will be degraded through reaction with hydroxyl radicals.
2. Some of the material will become associated with benthic sediments, and it is likely to be spread over a fairly wide area of sea floor. Marine sediments may be either aerobic or anaerobic. The material, in probability, is biodegradable, under aerobic conditions. Evidence also suggests that the hydrocarbons may be degradable under anaerobic conditions although such degradation in benthic sediments may be a relatively slow process.
3. Under aerobic conditions the material will degrade to water and carbon dioxide, while under aerobic processes it will produce water, methane, carbon dioxide and carbon dioxide.
4. Based on test results, as well as theoretical considerations, the potential for bioaccumulation may be high. Toxic effects are often observed in species such as blue mussel, daphnia, freshwater green algae, marine copepods and amphipods.

Half-life (Air): 10~104 hr

Half-life (Surface water): 96~528 hr

Half-life (Ground water): 168~672 hr

Half-life (Soil): 96~528 hr

Bioaccumulative potential

This material is not expected to significantly bioaccumulate.

Mobility in soil: —





Other adverse effects: —

SECTION 13-DISPOSAL CONSIDERATIONS

Residues and spilled material are hazardous waste due to ignitability. Disposal must be in accordance with applicable federal, state, or local regulations.

The container for this product can present explosion or fire hazards, even when emptied. To avoid risk of injury, do not cut, puncture, or weld on or near this container. Since the emptied containers retain product residue, follow label warnings even after container is emptied.

SECTION 14-TRANSPORTATION INFORMATION

US DOT	Shipping Name	Toluene	Hazard Labels	
	Hazard Class	3		
	UN Number	1294		
	Packing Group	II		
Sea(IMO/IMDG)	Shipping Name	Toluene	Hazard Labels	
	Hazard Class	3.2		
	UN Number	1294		
	Packing Group	II		
	IMDG Code Page	3285		
MARPOL	Not a DOT "Marine Pollutant" per 49 CFR 171.8.			
Air(ICA0/IATA)	Shipping Name	Toluene	Hazard Labels	
	Hazard Class	3.2		
	Subsidiary Class	1294		
	Packing Group	II		
RID/ ADR	No information available.			
Canadian TDG	Shipping Name	Toluene	Hazard Labels	
	Hazard Class	3		
	UN Number	1294		
	Packing Group	II		
	Subsidiary Class	9.2		

SECTION 15-REGULATORY INFORMATION

US FEDERAL

TSCA

CAS# 108-88-3 is listed on the TSCA inventory.

Health & Safety Reporting List

CAS# 108-88-3: Effective Date: 10/4/82; Sunset Date: 10/4/92

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

SARA

Section 302 (RQ)

CAS# 108-88-3 : final RQ = 1000 pounds (454 kg)

Section 302 (TPQ)

None of the chemicals in this material have a TPQ.

SARA Codes

CAS# 108-88-3 : acute, flammable.

Section 313

This material contains Toluene (CAS# 108-88-3, 99% & 100%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 372.

Clean Air Act

CAS# 108-88-3 is listed as a hazardous air pollutant (HAP).

This material does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors.

<p>Clean Water Act</p> <p>CAS# 108-88-3 is listed as a Hazardous Substance under the CWA. CAS# 108-88-3 is listed as a Priority Pollutant under the Clean Water Act. CAS# 108-88-3 is listed as a Toxic Pollutant under the Clean Water Act.</p>
<p>OSHA</p> <p>None of the chemicals in this product are considered highly hazardous by OSHA.</p>
<p>STATE</p> <p>Toluene can be found on the following state right to know lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.</p> <p>WARNING: This product contains Toluene, a chemical known to the state of California to cause birth defects or other reproductive harm.</p> <p>California No Significant Risk Level: None of the chemicals in this product are listed.</p>
<p>European/International Regulations</p> <p>European Labeling in Accordance with EC Directives</p> <p>Hazard Symbols: XN F Risk Phrases : R 10 Flammable. R 20 Harmful by inhalation. Safety Phrases : S 9 Keep container in a well-ventilated place. S 16 Keep away from sources of ignition - No smoking. S 25 Avoid contact with eyes. S 29 Do not empty into drains. S 33 Take precautionary measures against static discharges.</p> <p>WGK (Water Danger/Protection) CAS# 108-88-3: 2</p> <p>United Kingdom Occupational Exposure Limits CAS# 108-88-3: OES-United Kingdom, TWA 50 ppm TWA; 191 mg/m3 TWA. CAS# 108-88-3: OES-United Kingdom, STEL 150 ppm STEL; 574 mg/m3 STEL.</p> <p>CANADA CAS#100-42-5 is listed on Canada's DSL/NDSL list. This product has a WHMIS classification of B2, D2A (99%)/B3, D2A (100%). CAS# 105-05-5 is not listed on Canada's Ingredient Disclosure List.</p> <p>Exposure Limits</p> <ul style="list-style-type: none"> ▪ CAS# 108-88-3: OEL-AUSTRALIA:TWA 100 ppm (375 mg/m3);STEL 150 ppm (560 mg/m3) ▪ OEL-BELGIUM:TWA 100 ppm (377 mg/m3);STEL 150 ppm (565 mg/m3) ▪ OEL-CZECHOSLOVAKIA:TWA 200 mg/m3;STEL 1000 mg/m3 ▪ OEL-DENMARK:TWA 50 ppm (190 mg/m3);Skin ▪ OEL-FINLAND:TWA 100 ppm (375 mg/m3);STEL 150 ppm; Skin ▪ OEL-FRANCE:TWA 100 ppm (375 mg/m3);STEL 150 ppm (560 mg/m3) ▪ OEL-GERMANY:TWA 100 ppm (380 mg/m3) ▪ OEL-HUNGARY:TWA 100 mg/m3;STEL 300 mg/m3;Skin ▪ OEL-JAPAN:TWA 100 ppm (380 mg/m3) ▪ OEL-THE NETHERLANDS:TWA 100 ppm (375 mg/m3);Skin ▪ OEL-THE PHILIPPINES:TWA 100 ppm (375 mg/m3) ▪ OEL-POLAND:TWA 100 mg/m3 ▪ OEL-RUSSIA:TWA 100 ppm; STEL 50 mg/m3 ▪ OEL-SWEDEN:TWA 50 ppm (200 mg/m3);STEL 100 ppm (400 mg/m3);Skin ▪ OEL-SWITZERLAND:TWA 100 ppm (380 mg/m3);STEL 500 ppm ▪ OEL-THAILAND:TWA 200 ppm; STEL 300 ppm ▪ OEL-TURKEY:TWA 200 ppm (750 mg/m3) ▪ OEL-UNITED KINGDOM:TWA 100 ppm (375 mg/m3);STEL 150 ppm; Skin OEL IN BULGARIA, COLOMBIA, JORDAN, KOREA check ACGIH TLV OEL IN NEW ZEALAND, SINGAPORE, VIETNAM check ACGI TLV

SECTION 16-OTHER INFORMATION

References and sources

1. CHEMINFO Data Bank, CCINFO CD, 2005-3
2. HAZARD TEXT Data Bank, TOMES PLUS CD, Vol.65, 2005
3. RETECS Data Bank, TOMES CPS CD, Vol.65, 2005
4. HSDB Data Bank, TOMES CPS CD, Vol.65, 2005
5. Hazardous Substance Data Bank, Environment Protection, Administration, Executive Yuan, ROC (Taiwan)
6. Chemwatch Data Bank, 2005-1
7. SDS, GHS in Taiwan, Council of Labor Affairs, Executive Yuan, ROC (Taiwan)

Version	Date	Remark
Version 1	06/01/1998	Original Version.
Version 2	04/20/2001	Updated 10 sections to 16 sections.
Version 3	08/01/2003	Updated "SECTION 9-PHYSICAL AND CHEMICAL PROPERTIES".
Version 4	01/01/2006	Updated "SECTION 14-TRANSPORTATION INFORMATION".
Version 5	08/05/2008	Updated each section by GHS SDS.
Prepared by	Safety & Environment Protection Section, Taiwan SM Corporation Kaohsiung Plant.	

SAFETY DATA SHEET

Version 4.6
 Revision Date 03/02/2015
 Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Trichloroethylene

Product Number : 251402
 Brand : Sigma-Aldrich
 Index-No. : 602-027-00-9

CAS-No. : 79-01-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
 3050 Spruce Street
 SAINT LOUIS MO 63103
 USA

Telephone : +1 800-325-5832
 Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Skin irritation (Category 2), H315
 Eye irritation (Category 2A), H319
 Germ cell mutagenicity (Category 2), H341
 Carcinogenicity (Category 1B), H350
 Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336
 Acute aquatic toxicity (Category 3), H402
 Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H315 : Causes skin irritation.
 H319 : Causes serious eye irritation.
 H336 : May cause drowsiness or dizziness.
 H341 : Suspected of causing genetic defects.
 H350 : May cause cancer.
 H412 : Harmful to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P281	Use personal protective equipment as required.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	TCE Trichloroethene
Formula	:	C ₂ HCl ₃
Molecular weight	:	131.39 g/mol
CAS-No.	:	79-01-6
EC-No.	:	201-167-4
Index-No.	:	602-027-00-9

Hazardous components

Component	Classification	Concentration
Trichloroethylene Included in the Candidate List of Substances of Very High Concern (SVHC) according to Regulation (EC) No. 1907/2006 (REACH)		
	Skin Irrit. 2; Eye Irrit. 2A; Muta. 2; Carc. 1B; STOT SE 3; Aquatic Acute 3; Aquatic Chronic 3; H315, H319, H336, H341, H350, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Light sensitive. Handle and store under inert gas.

Storage class (TRGS 510): Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Trichloroethylene	79-01-6	TWA	10.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		STEL	25.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		Potential Occupational Carcinogen See Appendix C See Appendix A		
		See Table Z-2		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		Peak	300.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Trichloroethylene	79-01-6	Trichloroacetic acid	15.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		Trichloroethanol	0.5000 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In end-exhaled air	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|--|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -84.8 °C (-120.6 °F) - lit. |
| f) Initial boiling point and boiling range | 86.7 °C (188.1 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower | Upper explosion limit: 10.5 %(V) |

flammability or explosive limits	Lower explosion limit: 8 %(V)
k) Vapour pressure	81.3 hPa (61.0 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	1.463 g/mL at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 2.29log Pow: 5
p) Auto-ignition temperature	410.0 °C (770.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents, Strong bases, Magnesium

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 4,920 mg/kg

LC50 Inhalation - Mouse - 4 h - 8450 ppm

LD50 Dermal - Rabbit - > 20,000 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Severe skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.
In vitro tests showed mutagenic effects

Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 1 - Group 1: Carcinogenic to humans (Trichloroethylene)

NTP: Reasonably anticipated to be a human carcinogen (Trichloroethylene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: KX4550000

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, Exposure to and/or consumption of alcohol may increase toxic effects., Gastrointestinal disturbance, Kidney injury may occur., narcosis
To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 41 mg/l - 96.0 h

LOEC - other fish - 11 mg/l - 10.0 d

NOEC - Oryzias latipes - 40 mg/l - 10.0 d

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 18.00 mg/l - 48 h

Toxicity to algae IC50 - Pseudokirchneriella subcapitata (green algae) - 175.00 mg/l - 96 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Does not bioaccumulate.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1710 Class: 6.1 Packing group: III
Proper shipping name: Trichloroethylene
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1710 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TRICHLOROETHYLENE

IATA

UN number: 1710 Class: 6.1 Packing group: III
Proper shipping name: Trichloroethylene

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2011-09-01

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

	CAS-No.	Revision Date
	79-01-6	2011-09-01

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H402	Harmful to aquatic life.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 03/02/2015

Print Date: 02/18/2016

SAFETY DATA SHEET

Version 4.17
Revision Date 03/03/2015
Print Date 02/19/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Trichlorofluoromethane
Product Number : 254991
Brand : Aldrich
CAS-No. : 75-69-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA
Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Dermal (Category 4), H312

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Warning

Hazard statement(s)
H312 : Harmful in contact with skin.

Precautionary statement(s)
P280 : Wear protective gloves/ protective clothing.
P302 + P352 + P312 : IF ON SKIN: Wash with plenty of soap and water. Call a POISON CENTER or doctor/ physician if you feel unwell.
P363 : Wash contaminated clothing before reuse.
P501 : Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS**3.1 Substances**

Synonyms : Fluorotrichloromethane
CFC-11

Formula : CCl₃F CCl₃F
Molecular weight : 137.37 g/mol
CAS-No. : 75-69-4
EC-No. : 200-892-3

Hazardous components

Component	Classification	Concentration
Trichlorofluoromethane		
	Acute Tox. 4; H312	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas, Hydrogen fluoride

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Contents under pressure.

Storage class (TRGS 510): Non Combustible Liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Trichlorofluoromethane	75-69-4	C	1,000.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Cardiac sensitization Not classifiable as a human carcinogen		
		C	1,000.000000 ppm 5,600.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1,000.000000 ppm 5,600.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 30 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | -110.99 - -109.99 °C (-167.78 - -165.98 °F) |
| f) Initial boiling point and boiling range | 23.7 °C (74.7 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 885.7 hPa (664.3 mmHg) at 20.0 °C (68.0 °F)
2,701.2 hPa (2,026.1 mmHg) at 55.0 °C (131.0 °F) |
| l) Vapour density | No data available |
| m) Relative density | 1.494 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | 1 g/l |
| o) Partition coefficient: n-octanol/water | log Pow: 2.53 |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |

t) Oxidizing properties No data available

9.2 Other safety information

Surface tension 18.0 mN/m at 25.0 °C (77.0 °F)

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Sodium/sodium oxides, Potassium, Magnesium, Aluminum, Zinc

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - > 15,000 mg/kg

LC50 Inhalation - Rat - 0.3 h - 130000 ppm

Remarks: Behavioral:Tremor. Behavioral:Convulsions or effect on seizure threshold. Respiratory disorder

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: PB6125000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated., Nausea, Dizziness, Headache, Vomiting, Diarrhoea, Abdominal pain, Weakness, Unconsciousness

Liver -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 3082

Class: 9

Packing group: III

Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (Trichlorofluoromethane)

Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Trichlorofluoromethane	75-69-4	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

Trichlorofluoromethane	CAS-No. 75-69-4	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

Pennsylvania Right To Know Components

Trichlorofluoromethane	CAS-No. 75-69-4	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

New Jersey Right To Know Components

Trichlorofluoromethane	CAS-No. 75-69-4	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox. H312	Acute toxicity Harmful in contact with skin.
--------------------	---

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	1
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.17

Revision Date: 03/03/2015

Print Date: 02/19/2016

SAFETY DATA SHEET

Version 5.1
Revision Date 02/09/2015
Print Date 04/11/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Residual Solvent Class 1 - 1,1-Dichloroethene,
United States Pharmacopeia (USP) Reference
Standard

Product Number : 1601204
Brand : USP

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

2.2 GHS Label elements, including precautionary statements

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.2 Mixtures

No components need to be disclosed according to the applicable regulations.

4. FIRST AID MEASURES

4.1 Description of first aid measures

No data available

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

No data available

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

No data available

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

For personal protection see section 8.

6.2 Environmental precautions

No data available

6.3 Methods and materials for containment and cleaning up

No data available

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

No data available

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

8.2 Exposure controls

No data available

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|-------------------|
| a) Appearance | Form: liquid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | No data available |
| f) Initial boiling point and boiling range | No data available |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | No data available |

- | | |
|---|-------------------|
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

No data available

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

No data available

10.6 Hazardous decomposition products

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

Skin corrosion/irritation

Serious eye damage/eye irritation

Respiratory or skin sensitisation

Germ cell mutagenicity

Carcinogenicity

Reproductive toxicity

Specific target organ toxicity - single exposure

Specific target organ toxicity - repeated exposure

Aspiration hazard

Additional Information

RTECS: Not available

12. ECOLOGICAL INFORMATION**12.1 Toxicity****12.2 Persistence and degradability****12.3 Bioaccumulative potential****12.4 Mobility in soil****12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods**

No data available

14. TRANSPORT INFORMATION**DOT (US)**

NA-Number: 1993

Class: NONE

Packing group: III

Proper shipping name: Combustible liquid, n.o.s. (DMSO (USP Specification))

Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

16. OTHER INFORMATION**Preparation Information**

Sigma-Aldrich Corporation

Product Safety – Americas Region

1-800-521-8956

Version: 5.1

Revision Date: 02/09/2015

Print Date: 04/11/2016



MATERIAL SAFETY DATA SHEET

(POLYCHLORINATED BIPHENYLS)

COMPOSITION/INFORMATION ON INGREDIENTS

Ingredients Name: polychlorinated biphenyls (PCBs)

HAZARD IDENTIFICATION

Reports of Carcinogenicity: YES

HEALTH HAZARDS ACUTE AND CHRONIC

- **Eyes**: Moderately irritating to eye tissues.
- **Skin**: Can be absorbed through intact skin, may cause de-fatting, potential for chloracne.
- **Inhalation**: Possible liver injury.
- **Ingestion**: Slightly toxic; reasonably anticipated to be carcinogenic.

EFFECTS OF OVER-EXPOSURE

Can cause dermatological symptoms; however, these are reversible upon removal of exposure source.

FIRST AID MEASURES

- **Eyes**: Irrigate immediately with copious quantities of running water for at least 15 minutes if liquid or solid PCBs get into them.
- **Skin**: Contaminated clothing should be removed and the skin washed thoroughly with soap and water. Hot PCBs may cause thermal burns.
- **Inhalation**: Remove to fresh air; if skin rash or respiratory irritation persists, consult a physician (if electrical equipment arcs over, PCBs may decompose to produce hydrochloric acid).
- **Ingestion**: Consult a physician. Do not induce vomiting or give any oily laxatives. (If large amounts are ingested, gastric lavage is suggested).

FIRE FIGHTING MEASURES: Flash Point: >141 °C (285.8 °F)

EXTINGUISHING MEDIA: PCBs are fire-resistant compounds.


FIRE-FIGHTING PROCEDURES

Standard fire-fighting wearing apparel and self-contained breathing apparatus should be worn when fighting fires that involve possible exposure to chemical combustion products. Fire fighting equipment should be thoroughly cleaned and decontaminated after use.


UNUSUAL FIRE/EXPLOSION HAZARD

If a PCB transformer is involved in a fire-related incident, the owner of the transformer is required to report the incident. Consult and follow appropriate federal, provincial and local regulations.

Note: When askarel liquid becomes involved in a fire, toxic by-products of combustion are typically produced including polychlorinated dibenzofurans and polychlorinated dibenzodioxins, both known carcinogens. The structures of these chemical species are as follows:

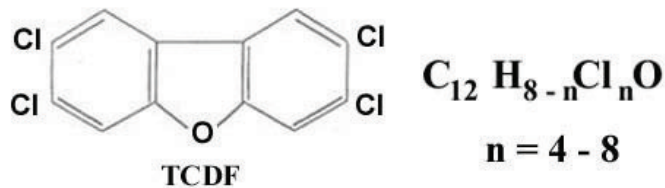

2,3,7,8-tetrachlorodibenzofuran

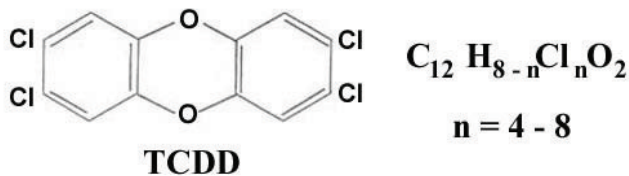

2,3,7,8-tetrachloro-dibenzo-p-dioxin

Note: 2,3,7,8-tetrachloro-dibenzo-p-dioxin is one of the most potent teratogenic, mutagenic and carcinogenic agents known to man.

SPILL RELEASE PROCEDURES

Cleanup & disposal of liquid PCBs are strictly regulated by the federal government. Ventilate area. Contain spill/leak. Remove spill by means of absorptive material. Spill clean-up personnel should use proper protective clothing. All wastes and residues containing PCBs should be collected, containerized, marked and disposed of in the manner prescribed by applicable federal, provincial and local laws.

HANDLING AND STORAGE PRECAUTIONS

Care should be taken to prevent entry into the environment through spills, leakage, use, vaporization, or disposal of liquid. Avoid prolonged breathing of vapours or mists. Avoid contact with eyes or prolonged contact with skin. Comply with all federal, provincial and local regulations.

OTHER PRECAUTIONS

Federal regulations require PCBs, PCB items, storage areas, transformer vaults, and transport vehicles to be appropriately labelled.

RESPIRATORY PROTECTION

Use OSHA approved equipment when airborne exposure limits are exceeded. Full facepiece equipment is recommended and, if used, replaces need for face shield and/or chemical splash goggles. The respirator use limitations specified by the manufacturer must be observed.

VENTILATION

Provide natural or mechanical ventilation to control exposure levels below airborne exposure levels.

PROTECTIVE GLOVES: Wear appropriate chemical resistant gloves to prevent skin contact.

EYE PROTECTION: Wear chemical splash goggles and have eye baths available.

OTHER PROTECTIVE EQUIPMENT

Wear appropriate protective clothing. Provide a safety shower at any location where skin contact can occur.

WORK HYGIENIC PRACTICES

Wash thoroughly after handling. Supplemental safety and health : none

PHYSICAL/CHEMICAL PROPERTIES

- **Vapour pressure:** (mm Hg @100 °F) 0.005 - 0.00006
- **Viscosity:** (CENTISTOKES) 3.6 - 540
- **Stability indicator/materials to avoid:** Yes
- **Stability Condition to Avoid:** PCBs are very stable, fire-resistant compounds.

HAZARDOUS DECOMPOSITION PRODUCTS

Carbon monoxide, carbon dioxide, hydrogen chloride, phenolics, aldehydes, furans, dioxins

WASTE DISPOSAL METHODS

Consult the applicable PCB regulations prior to any disposal of PCBs or PCB-contaminated items.



UNLEADED GASOLINE (ALL GRADES) MATERIAL SAFETY DATA SHEET

Petrocom Energy Group, LLC
1330 Post Oak Blvd., Suite 2350
Houston, Texas 77056
Phone: 713-418-3000
Fax: 713-418-3001

Revision Date: 03/05/2008


Section 1: Product Identification

Name: Unleaded Gasoline
Synonyms: Regular/Midgrade/Premium Gasoline, Motor Fuel, Reformulated Gasoline, RFG, Conventional Gasoline.
CAS No.: 86290-81-5
MSDS No.: PEG-UNL
Use: Motor fuel

Section 2: Product Composition

<u>Component</u>	<u>CAS Number</u>	<u>Amount (%)</u>
Gasoline	86290-81-5	0 – 100
Benzene	71-43-2	0 – 5
Toluene	108-88-3	0 – 30
Xylene (all isomers)	1330-20-7	0 – 25
Hexane (other isomers)	Mixture	5 – 25
n-Hexane	110-54-3	0 – 3
Cyclohexane	110-82-7	0 – 3
Octanes (all isomers)	Mixture	0 – 20
Heptane (all isomers)	142-82-5	0 – 15
Ethanol	64-17-5	0 – 10
Pentanes (all isomers)	Mixture	0 – 20
Trimethylbenzenes (all isomers)	95-63-6	0 – 5
Ethylbenzene	100-41-4	0 – 5
Cumene	98-82-8	0 – 5
Methyl Tertiary Butyl Ether (MTBE)	1634-04-4	0 – 16
Tertiary Amyl Methyl Ether (TAME)	994-05-8	0 – 6

Section 3: Hazards Identification

<u>Emergency Overview</u>	<u>Hazard Rankings</u>
<p style="text-align: center;">DANGER!</p> <p style="text-align: center;">Extremely Flammable liquid and vapor Harmful if swallowed Skin Irritant May cause eye and respiratory irritation Cancer Hazard – Contains material which can cause cancer</p>	<p style="text-align: center;">NFPA</p> <div style="text-align: center;">  <p>The NFPA hazard diamond consists of four colored triangles meeting at a central point. The top triangle is red and contains the number 3. The left triangle is blue and contains the number 1. The right triangle is yellow and contains the number 0. The bottom triangle is white and is empty.</p> </div>

Physical form: Liquid
Appearance: Clear to amber
Odor: Strong, Gasoline

Potential Health Effects

Eyes: Contact with eyes may cause irritation, redness, tearing, stinging, watering and blurred vision.

Skin: Contact with skin may cause irritation, itching, redness and skin damage. Prolonged or repeated contact may cause drying and cracking of the skin, and may also cause dermatitis and inflammation. (See also section 11).

Inhalation: Breathing high concentration can be harmful. Throat and lung irritation may occur. Central nervous system effects including nausea, euphoria, dizziness, headache, fatigue, drowsiness or unconsciousness may occur due to long term or high concentration exposure to vapors.

Ingestion: Toxic if swallowed. This product may cause nausea, vomiting, dizziness, drowsiness, diarrhea if swallowed. Central nervous system effects may be caused. Swallowing this product can result in severe lung damage and/or death.

Signs / Symptoms: When overexposed to this product effects such as nausea, vomiting, blurred vision, respiratory failure, central nervous system depression, unconsciousness, tremor, death may occur.

See toxicological Information (section 11)

Section 4: First Aid Measures

- Eye contact:** Flush eyes immediately with fresh, cool water for at least 15 minutes. If irritation or redness or any symptoms persist, seek medical attention.
- Skin contact:** Remove contaminated clothes and shoes. Flush affected area with large amounts of water. If skin surface is damaged, apply a clean dressing and seek medical attention. If skin surface is not damaged, wash affected area thoroughly with soap and water. If irritation or redness develops, seek medical attention.
- Inhalation (Breathing):** If inhaled, immediately move person to fresh air. If there is difficulty breathing, give oxygen. If not breathing, immediately give artificial respiration. Seek medical attention.
- Ingestion (Swallowing):** This product may be harmful or fatal if swallowed. This product may cause nausea, vomiting, diarrhea and restlessness. Do not induce vomiting. Do not give anything by mouth because this material can enter the lungs and cause severe lung damage. If victim is unconscious or drowsy, place on the left side with the head down. Seek immediate medical attention.
- Notes to Physician:** This material sensitizes the heart to the effects of sympathomimetic amines. Epinephrine and other sympathomimetic drugs may initiate cardiac arrhythmias in individuals exposed to this material. Inhalation overexposure can produce toxic effects. Monitor respiratory distress. If difficulty in breathing evaluate upper respiratory tract inflammation, bronchitis and pneumonitis. Administer supplemental oxygen as required. If ingested, this material presents a significant aspiration and chemical pneumonitis hazard. Consider activated charcoal and/or gastric lavage. If patient is obtunded, protect the airway by cuffed endotracheal intubation or by placement of the body in a Trendelenburg and left lateral decubitus position.

Section 5: Fire Fighting Measures

NFPA Hazard Class: Health = 1 ; Flammability = 3 ; Instability = 0
(0 – Minimal ; 1 – Slight ; 2 – Moderate ; 3 – Serious ; 4 – Severe)



Auto – ignition temperature : >260 °C (500 °F)

Flash point : Closed cup: -43 °C (-45 °F)

Flammable limits : Lower: approximately 1.4%
Upper: approximately 7.6%

Products of combustion : Carbon monoxide, carbon dioxide, nitrogen and sulfur oxides, smoke, fumes, unburned hydrocarbons and other products of incomplete combustion.

Special properties : Flammable liquid! This material can be ignited by heat, sparks, flames or other sources of ignition. Vapors may travel long distances to a source where they can ignite and flash back, or explode. A mixture of vapor and air can create an explosion hazard in confined spaces. If container is not properly cooled, it can rupture on the heat of a fire.

Extinguishing media : Use of dry chemical, carbon dioxide, or foam is recommended to extinguish fire. Water spray is recommended to cool or protect exposed materials or structures. Carbon dioxide can displace oxygen. Use caution when applying carbon dioxide in confined spaces. Water may not extinguish the fire, unless it is used by experienced fire fighters and under favorable conditions.

Protective Equipment for Fire Fighters : Fire fighters should wear appropriate protective equipment and self contained breathing apparatus (SCBA) with a full face piece operated in positive pressure mode.

Section 6: Accidental Release Measures

- Personal precautions:** This material is extremely flammable. Eliminate all ignition sources. Keep all hot metal surfaces away from spill/release. All equipment used when handling this material must be grounded.
- Spill precautions:** Stay upwind and away from spill. Notify persons down wind of the spill, isolate spill area and keep unauthorized personnel out. If it can be done with minimal risk, try to stop spill. Always wear protective equipment, including respiratory protection. Contact emergency personnel.
- Environmental precautions:** Prevent spilled material from entering sewers, drains, soil, and natural waterways. Use foam or spills to minimize vapors (section 5). Spilled material may be absorbed into an appropriate absorbent material.
- Methods for cleaning up:** Notify fire authorities and appropriate federal, state and local agencies. Immediate cleanup is recommended.

Section 7: Handling and Storage

- Handling:** Flammable liquid and vapor. To be used only as a motor fuel. Avoid inhalation of vapors and contact with skin. Wash hands thoroughly after handling this material. Use in a well ventilated area away from all ignition sources. Use product with caution around heat, sparks, static electricity and open flames. Static electricity may ignite vapors and cause fire.
- Empty containers retain residue and may be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks or other ignition sources. They may explode and cause injury and/or death. Empty drums should be completely drained, properly bunged, and returned promptly to a drum reconditioner. All containers should be disposed of in an environmentally safe manner and in accordance with governmental regulations.
- Storage:** Store in approved containers only. Keep in tightly closed containers in cool, dry, well ventilated areas. Keep isolated away from heat, sources of ignition and hot metal surfaces.

Section 8: Exposure Controls / Personal Protection

Engineering controls: Provide ventilation or other engineering controls to keep the airborne concentrations of vapor or mists below their occupational exposure limits. Eyewash stations and safety showers should be located near the work-station.

Personal Protection

Eye Protection: Keep away from eyes. Safety glasses complying with approved standards should be worn. Chemical type goggles should be worn.

Skin Protection: Keep away from skin. Skin protection should be worn. Chemical resistant, impervious gloves should be worn. Always follow good personal hygiene practices after handling the material.

Respiratory Protection: Approved respiratory equipment must be used if a risk assessment indicates it is necessary. If workplace exposure limits for product or components are exceeded, NIOSH approved equipment should be worn.

General Protection: Use this material in well ventilated areas. Ventilation equipment should be explosion proof also.

Component	Applicable Workplace Exposure Limits
Gasoline	ACGIH – TWA: 300 ppm (8 hours) STEL: 500 ppm (15 minutes)
Benzene	ACGIH – TWA: 0.5 ppm (8 hours) STEL: 2.5 ppm (15 minutes) OSHA – TWA: 1 ppm (8 hours) STEL: 5 ppm (15 minutes)
Toluene	ACGIH – TWA: 20 ppm (8 hours) OSHA – TWA: 200 ppm (8 hours) CEIL: 300 ppm PEAK: 500 ppm (10 minutes)
Xylene (all isomers)	ACGIH – TWA: 100 ppm (8 hours) STEL: 150 ppm (15 minutes) OSHA – TWA: 100 ppm (8 hours)
Hexane (other isomers)	ACGIH – TWA: 500 ppm (8 hours) STEL: 1000 ppm (15 minutes)
n-Hexane	ACGIH – TWA: 50 ppm (8 hours) OSHA – TWA: 500 ppm (8 hours)
Cyclohexane	ACGIH – TWA: 100 ppm (8 hours) OSHA – TWA: 300 ppm (8 hours)
Octanes (all isomers)	ACGIH – TWA: 300 ppm (8 hours) OSHA – TWA: 500 ppm (8 hours)
Heptane (all isomers)	ACGIH – TWA: 400 ppm (8 hours) STEL: 5000 ppm (15 minutes) OSHA – TWA: 500 ppm (8 hours)
Ethanol	ACGIH – TWA: 1000 ppm (8 hours) OSHA – TWA: 1000 ppm (8 hours)
Pentanes (all isomers)	ACGIH – TWA: 600 ppm (8 hours) OSHA – TWA: 1000 ppm (8 hours)
Trimethylbenzenes (all isomers)	ACGIH – TWA: 25 ppm (8 hours)
Ethylbenzene	ACGIH – TWA: 100 ppm (8 hours) STEL: 125 ppm (15 minutes) OSHA – TWA: 100 ppm (8 hours)
Cumene	ACGIH – TWA: 50 ppm (8 hours) OSHA – TWA: 50 ppm (8 hours)
Methyl Tertiary Butyl Ether (MTBE)	ACGIH – TWA: 50 ppm (8 hours)
Tertiary Amyl Methyl Ether (TAME)	ACGIH – TWA: 20 ppm (8 hours)

Section 9: Physical and Chemical Properties

Physical State:	Liquid.
Color:	Transparent, clear to amber liquid.
Odor:	Strong. Characteristic gasoline odor.
pH:	Not applicable
Boiling Point:	>26 °C (>78 °F)
Melting Point:	Not applicable.
Specific gravity:	0.66 to 0.75 (Water = 1)
Vapor density:	3 to 4 (Air = 1)
Vapor pressure:	220-450 mm Hg at 20°C (68°F) / 6-15 Reid-psia at 37.8°C (100°F)
Volatility:	720 – 770 g/l VOC (w/v)
Viscosity (at 40 °C):	< 1
Flash Point:	< -45 °F / < 43°C
Bulk Density:	6.0 – 6.4 lbs/gal
Solubility in water:	Negligible

Section 10: Stability and Reactivity

Stability:	Stable. Extremely flammable liquid and vapor. Vapor can cause fire.
Conditions to avoid:	Keep away from heat, flame and all other possible sources of ignition.
Materials to avoid:	Keep away from strong oxidizing agents such as acids, chlorine, hydrogen peroxide and oxygen.
Hazardous decomposition products:	Please refer to the combustion products identified in Section 5 of this MSDS.
Hazardous Polymerization:	Not expected to occur.

Section 11: Toxicological Information

Toxicology Information

Oral toxicity: Almost non-toxic. LD 50: > 2000 mg/kg (species: rats)
Dermal toxicity: Almost non-toxic. LD 50: > 2000 mg/kg (species: rabbits)
Inhalation toxicity: Almost non-toxic. LD 50: > 5 mg/l (species: rats)
Eye irritation: Almost non-irritating. Draize score: > 6 and < 15 (species: rabbits)
Skin irritation: Irritant. Primary irritation index: > 3 and < 5 (species: rabbits)

Other data: Inhalation of high concentrations of vapors or mists may cause respiratory system irritation and damage. It may also result in the damage and depression of the central nervous system and may cause death. Prolonged contact with the material may cause severe skin irritation.

Subchronic toxicity: Dermal studies resulted in significant irritation but not systematic toxicity (species: rabbits). Inhalation exposures (90 day, approximately 1500 ppm vapor) produced light hydrocarbon nephropathy but no significant systemic toxicity (species: rats).

Neurotoxicity: Repeated and prolonged exposures to high concentrations of vapor has been reported to result in central nervous system damage and eventually, death. In a study in which ten human volunteers were exposed for 30 minutes to approximately 200, 500 or 1000 ppm concentrations of gasoline vapor, irritation of the eyes was the only significant effect observed, based on both subjective and objective assessments. However, no persistent neurotoxic effects were observed in subchronic inhalation studies of gasoline.

Reproductive toxicity: An inhalation study with rats exposed to 0, 400 and 1600 ppm of wholly vaporized unleaded gasoline, 6 hours per day on day 6 through 16 of gestation, showed no teratogenic effects nor indication of toxicity to either the mother or the fetus. Another inhalation study in rats exposed to 3000, 6000, or 9000 ppm of gasoline vapor, 6 hours per day on day 6 through 20 of gestation, also showed no teratogenic effects nor indications of toxicity to either the mother or the fetus.

Chronic toxicity: A lifetime mouse skin painting study of unleaded gasoline applied at 50 microliters, three time weekly, resulted in some severe skin irritation and changes, but no statistically significant increase in skin cancer or cancer to any other organ. Lifetime inhalation of wholly vaporized unleaded gasoline over 2000 ppm has caused increased liver tumors in female mice and increased kidney tumors in male rats. The EPA has concluded that mechanism by which wholly vaporized unleaded gasoline causes kidney damage is unique to the male rat. The effects in that species (kidney damage and cancer) should not be used in human risk assessment.

Other toxic effects on humans	Extremely hazardous in case of ingestion. Very hazardous in case of eye contact. Hazardous in case of skin contact. Slightly hazardous in case of inhalation.
Carcinogenic effects:	Contains material that may cause cancer depending on the level and duration of exposure.
Target organs:	Contains material that may cause damage to humans organs such as (but not limited to) blood, kidneys, lungs, liver, eye, skin, nervous system and upper respiratory tract.

Section 12: Ecological Information

Ecotoxicity:	This material may be toxic to aquatic organisms such as algae and daphnia. It has also shown to be toxic to fish.
Environmental fate:	The material is expected to be readily biodegradable. When released into the environment, some of the constituents of gasoline will volatilize and be photo degraded in the atmosphere. Following spillage, the more volatile components of gasoline will be rapidly lost, with concurrent dissolution of these and other constituents into the water. Factors such as local environmental conditions, photo-oxidation, biodegradation and adsorption onto suspended sediments, can contribute to the weathering of spilled gasoline.

Section 13: Disposal Considerations

Waste disposal:	Avoid disposal of spilled material and runoff and contact with soil, waterways, drains and sewers. Disposal of this product and any of its by products should always comply with the requirements of environmental protection and waste disposal legislation and any local authority requirements. This material would likely be identified as a federally regulated RCRA hazardous waste. See sections 7 and 8 for further information on handling, storage and personal protection. See section 9 for the material's physical and chemical properties.
------------------------	---

Section 14: Transportation Information

This material is U.S Department of Transportation (DOT) regulated material.

Shipping name: Gasoline, 3, UN 1203, PG II
Gasohol, 3, NA 1203, PG II (for gasoline blended with less than 20% ethanol).

Hazard class: 3 DOT Class: Flammable liquid

Packing Group: II

UN / NA Number: UN1203 / NA1203

Emergency Response Code: 128

Label:

**Section 15: Regulatory Information**

TSCA Inventory: This product and/or its components are listed on the Toxic Substances Control Act (TSCA)

**SARA 302 / 304:
Emergency planning and notification** The Superfund Amendments and Reauthorization Act of 1986 (SARA) Title III requires facilities subject to Subparts 302 and 304 to submit emergency planning and notification information based on Threshold Planning Quantities (TPQs) and Reportable Quantities (RQs) for "Extremely Hazardous Substances" listed in 40 CFR 302.4 and CFR 355. No components were identified.

**SARA 311 / 312:
Hazard identification** SARA Title III requires facilities subject to this subpart to submit aggregate information on chemicals by "Hazard Category" as defined in 40 CFR 370.2. This material would be classified under: Fire, Acute (immediate) Health Hazard, Chronic (Delayed) Health Hazard.

**CERCLA / SARA 313:
Toxic and chemical
notification and release
reporting**

This material contains the following chemicals subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR 372

Component	CAS Number	Amount (%)
Benzene	71-43-2	0 – 5
Toluene	108-88-3	0 – 30
Xylene (o, m, p isomers)	1330-20-7	0 – 25
n-Hexane	110-54-3	0 – 3
Cyclohexane	110-82-7	0 – 3
1, 2, 4 Trimethylbenzenes	95-63-6	0 – 5
Ethylbenzene	100-41-4	0 – 5
Cumene	98-82-8	0 – 5
Methyl Tertiary Butyl Ether (MTBE)	1634-04-4	0 – 16

California Proposition 65: This material may contain detectable quantities of the following chemicals known to the State of California to cause cancer, birth defects or other reproductive harm, and which may be subject to the requirements of California Proposition 65 (CA Health & Safety Code Section 25249.5):

Benzene (CAS NO. 71-43-3)
Toluene (CAS No. 108-88-3)
Ethylbenzene (CAS No. 100-41-4)
Naphthalene (CAS No. 91-20-3)

Canadian Regulations: WHMIS Hazard Class: B2 – Flammable Liquids
D2A – Very Toxic Material

Section 16: Other Information

Issue date: March 5, 2008
Previous issue date: No previous date
Version: 1
MSDS Code: PEG-UNL

Legend:

ACGIH = American Conference of Governmental Industrial Hygienists
CAS = Chemical Abstracts Service Registry
CEIL = Ceiling Limit
CERCLA = The Comprehensive Environmental Response, Compensation and Liability Act
EPA = Environmental Protection Agency
NFPA = National Fire Protection Association
OSHA = Occupational Safety and Health Administration
SARA = Superfund Amendments and Reauthorization Act
STEL = Short Term Exposure Limit (15 minutes)
TWA = Time Weighted Average (8 hours)
WHMIS = Worker Hazardous Materials Information System (Canada)

Disclaimer:

The information presented in this Material Safety Data Sheet (MSDS) is based on data believed to be accurate as of the issuance date of this MSDS. No warranty is expressed or implied for the accuracy or completeness of the above provided information. Petrocom Energy Group, LLC does not assume any liability for any damage or injury arising out of product use by others. The end user of the product has the responsibility for evaluating the accuracy of the data, and determining the safety, toxicity and suitability of the product under any conditions.



SAFETY DATA SHEET

Xylene

SECTION 1: Identification of the substance/mixture and of the company/undertaking

Date issued 11.11.2013

1.1. Product identifier

Product name Xylene
Chemical name Xylene
Synonyms Xylol, dimethyl benzene, xylenol
REACH Reg No. 01-2119488216-32-0000
CAS no. 1330-20-7
EC no. 215-535-7
Index no. 601-022-00-9
Article no. 13000000

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/preparation For the preparation of paints and as a solvent. General purpose cleaner.

1.3. Details of the supplier of the safety data sheet

Manufacturer

Company name Fred Holmberg & Co AB
Office address Geijersgatan 8
Postal address Box 60056
Postcode S-216 10
City Limhamn
Country Sweden
Tel +46 (0)40 15 79 20
Fax +46 (0)40 16 22 95
E-mail info@holmberg.se
Website <http://www.holmberg.se/en/>

1.4. Emergency telephone number

Emergency telephone 112 (Europe)

SECTION 2: Hazards identification

2.1. Classification of substance or mixture

Classification according to 67/548/EEC or 1999/45/EC Xi; R38
Xn; R20/21
R10
Classification according to Regulation (EC) No 1272/2008 [CLP/GHS] Flam. Liq. 3; H226;
Acute tox. 4; H312;
Skin Irrit. 2; H315;
Acute tox. 4; H332;

2.2. Label elements

Hazard Pictograms (CLP)



Signal word	Danger
Hazard statements	H226 Flammable liquid and vapour. H312 Harmful in contact with skin. H315 Causes skin irritation. H332 Harmful if inhaled.
Precautionary statements	P210 Keep away from heat/sparks/open flames/hot surfaces. – No smoking. P233 Keep container tightly closed. P243 Take precautionary measures against static discharge. P280 Wear protective gloves/protective clothing/eye protection/face protection. P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. P303 + P361 + P353 IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. P331 Do NOT induce vomiting. P403 + P235 Store in a well-ventilated place. Keep cool.

2.3. Other hazards

Other hazards	Not known.
---------------	------------

SECTION 3: Composition/information on ingredients

3.2. Mixtures

Substance	Identification	Classification	Contents
Xylene	CAS no.: 1330-20-7 EC no.: 215-535-7 Index no.: 601-022-00-9	R10 Xn; R20/21 Xi; R38 Flam. Liq. 3; H226 Acute tox. 4; H332 Acute tox. 4; H312 Skin Irrit. 2; H315 Note : C	75 - 90 %
Ethylbenzene	CAS no.: 100-41-4 EC no.: 202-849-4 Index no.: 601-023-00-4 Synonyms: Ethylbenzene	F; R11 Xn; R20 Flam. Liq. 2; H225 Acute tox. 4; H332	10 - 25 %

Column headings	CAS no. = Chemical Abstracts Service; EU (Einecs or Elincs number) = European inventory of Existing Commercial Chemical Substances; Ingredient name = Name as specified in the substance list (substances that are not included in the substance list must be translated, if possible). Contents given in; %, %wt/wt, %vol/wt, %vol/vol, mg/m3, ppb, ppm, weight%, vol%
-----------------	---

HH/HF/HE	T+ = Very toxic, T = Toxic, C = Corrosive, Xn = Harmful, Xi = Irritating, E = Explosive, O = Oxidizing, F+ = Extremely flammable, F = Very flammable, N = Environmental hazard
----------	--

SECTION 4: First aid measures

4.1. Description of first aid measures

Inhalation	Move the exposed person to fresh air at once. Get medical attention if any discomfort continues.
Skin contact	Remove contaminated clothes and rinse skin thoroughly with water.
Eye contact	Immediately flush with plenty of water for up to 15 minutes. Remove any contact lenses and open eyes wide apart. Get medical attention if any discomfort continues.
Ingestion	NEVER MAKE AN UNCONSCIOUS PERSON VOMIT OR DRINK FLUIDS! Do not induce vomiting. Rinse mouth with water. Get medical attention.

4.2. Most important symptoms and effects, both acute and delayed

Information for health personnel	Treat Symptomatically. Do not give victim anything to drink if he is
----------------------------------	--

unconscious.

4.3. Indication of any immediate medical attention and special treatment needed

Specific details on antidotes No recommendation given.

SECTION 5: Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media Extinguish with alcohol-resistant foam, carbon dioxide, dry powder or water fog.

5.2. Special hazards arising from the substance or mixture

Fire and explosion hazards Solvent vapours may form explosive mixtures with air.

Hazardous combustion products Fire creates: Carbon monoxide (CO). Carbon dioxide (CO₂).

5.3. Advice for firefighters

Fire fighting procedures No specific fire fighting procedure given.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

Personal protection measures Ensure suitable personal protection (including respiratory protection) during removal of spillages in a confined area. Ventilate well. Stop leak if possible without risk. Avoid contact with skin and eyes. Do not breathe vapour.

6.2. Environmental precautions

Environmental precautionary measures Avoid discharge into drains, water courses or onto the ground.

6.3. Methods and material for containment and cleaning up

Cleaning method Dam and absorb spillages with sand, earth or other non-combustible material.

6.4. Reference to other sections

Other instructions No recommendation given.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Handling Keep away from heat, sparks and open flame. Take precautionary measures against static discharges. Mechanical ventilation may be required.

Protective Safety Measures

Advice on general occupational hygiene Provide easy access to water supply and eye wash facilities.

7.2. Conditions for safe storage, including any incompatibilities

Storage Keep away from heat, sparks and open flame. Ground container and transfer equipment to eliminate static electric sparks. Store in a cool and well-ventilated place.

7.3. Specific end use(s)

Specific use(s) Not entered.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

DNEL / PNEC

Method of testing	Contents
DNEL	Group: Industrial Exposure route: Inhalation Exposure frequency: Short term (acute) Critical Component: Etylbenzen Value: 289 mg/kg/dag

DNEL	Group: Industrial Exposure route: Inhalation Exposure frequency: Long term (repeated) Critical Component: Etylbenzen Type of effect: Systemic effect Value: 77 mg/kg/dag
DNEL	Group: Industrial Exposure route: Dermal Exposure frequency: Long term (repeated) Critical Component: Etylbenzen Type of effect: Systemic effect Value: 180 mg/kg/dag
DNEL	Group: Consumer Exposure route: Inhalation Exposure frequency: Long term (repeated) Critical Component: Etylbenzen Type of effect: Systemic effect Value: 14,8 mg/kg/dag
DNEL	Group: Consumer Exposure route: Dermal Exposure frequency: Long term (repeated) Critical Component: Etylbenzen Type of effect: Systemic effect Value: 108 mg/kg/dag
DNEL	Group: Consumer Exposure route: Oral Exposure frequency: Long term (repeated) Critical Component: Etylbenzen Type of effect: Systemic effect Value: 1,6 mg/kg/dag
DNEL	Group: Industrial Exposure route: Inhalation Exposure frequency: Short term (acute) Critical Component: xylen Value: 442 mg/kg/dag
DNEL	Group: Industrial Exposure route: Inhalation Exposure frequency: Long term (repeated) Critical Component: xylen Type of effect: Systemic effect Value: 221 mg/kg/dag
DNEL	Group: Industrial Exposure route: Dermal Exposure frequency: Long term (repeated) Critical Component: xylen Type of effect: Systemic effect Value: 3182 mg/kg/dag
DNEL	Group: Consumer Exposure route: Inhalation Exposure frequency: Short term (acute) Critical Component: xylen Value: 260 mg/kg/dag
DNEL	Group: Consumer Exposure route: Inhalation Exposure frequency: Long term (repeated) Critical Component: xylen Type of effect: Systemic effect

DNEL	Value: 65,3 mg/kg/dag Group: Consumer Exposure route: Dermal Exposure frequency: Long term (repeated) Critical Component: xylene Type of effect: Systemic effect
DNEL	Value: 1872 mg/kg/dag Group: Consumer Exposure route: Oral Exposure frequency: Long term (repeated) Critical Component: xylene Type of effect: Systemic effect
Exposure guidelines	Value: 12,5 mg/kg/dag Country of origin: Sverige Limit value type: NGV 200 mg/m ³ OEL Short Term Value: 450 mg/m ³ Source: Nationella hygieniska gränsvärden, AFS 2005:17 Ovanstående NGV resp. KTV gäller både xylen och etylbenzen
Other Information	

8.2. Exposure controls

Occupational exposure limits	Provide adequate ventilation. Observe Occupational Exposure Limits and minimise the risk of inhalation of vapours. Protective gloves and goggles are recommended. Provide eyewash, quick drench.
------------------------------	--

Safety signs



Respiratory protection

Respiratory protection	Respiratory protection must be used if air contamination exceeds acceptable level. Use respiratory equipment with gas filter, type A2.
------------------------	--

Hand protection

Hand protection	Use protective gloves. Chemical resistant gloves required for prolonged or repeated contact. Gloves of nitrile rubber, PVA or Viton are recommended.
-----------------	--

Eye / face protection

Eye protection	Use safety goggles or face shield in case of splash risk.
----------------	---

Skin protection

Skin protection (except hands)	Wear appropriate clothing to prevent any possibility of skin contact.
--------------------------------	---

Hygiene / Environmental

Specific hygiene measures	Wash hands after contact.
---------------------------	---------------------------

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state	Fluid.
Colour	Colourless.
Odour	Aromatic.
Comments, pH (as supplied)	Not relevant.
Melting point/melting range	Value: < -48 °C
Boiling point / boiling range	Value: 136-145 °C
Flash point	Value: 27 °C
Evaporation rate	Value: 13,5
Explosion limit	Value: 1-7,1 %
Vapour pressure	Value: 1 kPa Test temperature: 20 °C

Vapour density	Value: 3,7
Specific gravity	Value: 0,870 kg/m ³ Test temperature: 20 °C
Solubility description	Soluble in: Organic solvents. Not soluble in water.
Partition coefficient: n-octanol/water	Value: 3,15
Spontaneous combustability	Value: > 432-530 °C
Viscosity	Value: < 0,90 mPas Method of testing: Kinematisk Test temperature: 25 °C

9.2. Other information

SECTION 10: Stability and reactivity

10.1. Reactivity

Reactivity Heating may cause a fire.

10.2. Chemical stability

Stability Stable under the prescribed storage conditions.

10.3. Possibility of hazardous reactions

Possibility of hazardous reactions Not known.

10.4. Conditions to avoid

Conditions to avoid Avoid heat, flames and other sources of ignition.

10.5. Incompatible materials

Materials to avoid Avoid contact with oxidising agents (e.g. nitric acid, peroxides and chromates). Strong acids.

10.6. Hazardous decomposition products

Hazardous decomposition products Fire creates: Carbon monoxide (CO). Carbon dioxide (CO₂).

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Toxicological Information:

Other toxicological data
 Acute Toxicity (Oral LD50): mg/kg (oral rat) > 2000
 Acute Toxicity (Inhalation LC50): mg/l (vapours) (4h) > 20
 Acute Toxicity (Dermal LD50): mg/kg Rabbit > 2000

Toxicological data for substances

Potential acute effects

Inhalation In high concentrations, vapours are narcotic and may cause headache, fatigue, dizziness and nausea. Icke klassificerad som aspirationstoxisk (Not classified as asp. tox.)

Skin contact Prolonged or frequent contact may cause redness, itching, eczema and skin cracking. Defats the skin.

Eye contact May irritate and cause redness and pain.

Ingestion Ingestion of large amounts may cause unconsciousness. However, ingestion may cause nausea, headache, dizziness and intoxication. Ingestion may cause irritation of the gastrointestinal tract, vomiting and diarrhoea. May cause irritation to the mouth and throat.

Delayed effects / repeated exposure

Sensitisation Not known.
 Chronic effects None known.

Carcinogenic, Mutagenic or Reprotoxic

Carcinogenicity None.
 Mutagenicity Not known.
 Teratogenic properties Suspected of damaging the unborn child

Reproductive toxicity Not known.

SECTION 12: Ecological information

12.1. Toxicity

Acute aquatic, fish	Value: 2 mg/l Method of testing: LC50 Fish, species: Roccus saxatilis Duration: 96h
Acute aquatic, algae	Value: > 3,2 mg/l Method of testing: IC50 Algae, species: Selenastrum Capricornum Duration: 72h
Acute aquatic, Daphnia	Value: 8,5 mg/l Method of testing: EC50 Daphnia, species: Daphnia magna Duration: 48h

12.2. Persistence and degradability

Persistence and degradability description	Lättnedbrytbar av biologiska organismer.
Chemical oxygen demand (COD)	Value: 5 Method of testing: COD
Biological oxygen demand (BOD)	Value: 0,55 Method of testing: BOD

12.3. Bioaccumulative potential

Bioaccumulative potential	Will not bio-accumulate.
Bioconcentration factor (BCF)	Value: 22 Method of testing: BCF

12.4. Mobility in soil

Mobility	The product is insoluble in water and will spread on the water surface.
----------	---

12.5. Results of PBT and vPvB assessment

PBT assessment results	This substance is not classified as PBT or vPvB.
------------------------	--

12.6. Other adverse effects

Other adverse effects / Remarks	None known.
---------------------------------	-------------

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Specify the appropriate methods of disposal	Confirm disposal procedures with environmental engineer and local regulations. Absorb in vermiculite or dry sand and dispose of at a licenced hazardous waste collection point. Liquid components can be disposed of by incineration.
Product classified as hazardous waste	Yes
Packaging classified as hazardous waste	Yes

SECTION 14: Transport information

14.1. UN number

ADR	1307
RID	1307
IMDG	1307
ICAO/IATA	1307

14.2. UN proper shipping name

ADR	XYLENES
-----	---------

RID	XYLENES
IMDG	XYLENES
ICAO/IATA	XYLENES

14.3. Transport hazard class(es)

ADR	3
Hazard no.	30
RID	3
ADN	33
IMDG	3
ICAO/IATA	3

14.4. Packing group

ADR	III
RID	III
IMDG	III
ICAO/IATA	III

14.5. Environmental hazards

Comment	Not relevant.
---------	---------------

14.6. Special precautions for user

EmS	F-E, S-D
-----	----------

14.7. Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

SECTION 15: Regulatory information

EC no.	215-535-7
--------	-----------

15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture

Other Label Information	Regulation (EC) No 1272/2008 of the European Parliament and of the Council of 16 December 2008 on classification, labelling and packaging of substances and mixtures, amending and repealing Directives 67/548/EEC and 1999/45/EC, and amending Regulation (EC) No 1907/2006 with amendments.
Legislation and regulations	Dangerous Substance Directive 67/548/EEC. The Chemicals (Hazard Information and Packaging for Supply) Regulations 2009 (S.I 2009 No. 716). The List of Wastes (England) (Amendment) Regulations 2005. (SI 2005 No. 895). Avfallsförordningen (2011:927).

15.2. Chemical safety assessment

SECTION 16: Other information

Hazard symbol



R-phrases	R10 Flammable. R38 Irritating to skin. R20/22 Harmful by inhalation and if swallowed. R38 Irritating to skin.
S-phrases	S7 Keep container tightly closed. S16 Keep away from sources of ignition - No smoking.
Classification according to Regulation (EC) No 1272/2008 [CLP/GHS]	Flam. Liq. 3; H226; Acute tox. 4; H312; Skin Irrit. 2; H315;

List of relevant R-phrases (under headings 2 and 3).	Acute tox. 4; H332; R38 Irritating to skin. R11 Highly flammable. R10 Flammable. R20/21 Harmful by inhalation and in contact with skin. R20 Harmful by inhalation.
List of relevant H-phrases (Section 2 and 3).	H332 Harmful if inhaled. H312 Harmful in contact with skin. H225 Highly flammable liquid and vapour. H226 Flammable liquid and vapour. H315 Causes skin irritation.
Responsible for safety data sheet	Fred Holmberg & Co AB



SAFETY DATA SHEET

1. Identification

Product identifier	ATOMIZED ALUMINUM POWDER
Other means of identification	
SDS number	123
Chemical formula	Al
Version #	08
Revision date	August 11, 2015.
Other means of identification	
Synonyms	All non-alloyed, non-coated nodular aluminum powder containing < 1% trace elements * Grade 13, 101, 102, 104, 101T, 120, 121, 123, 1124, 1202, 1233, 1235, 1401/S2(1406), 1403, 1404, 1407, 1401/S9(1409), 1125, * 4402, 6401, 7123, 7124, 7125, 7401
Recommended use	Various metallurgical/chemical/structural/coating applications
Recommended restrictions	None known.
Manufacturer/Importer/Supplier/Distributor information	
Manufacturer	Alcoa Inc. 201 Isabella Street Pittsburgh, PA USA 15212 Health and Safety Tel: +1-412-553-4649 Health and Safety Fax: +1-412-553-4822 Health and Safety Email: accmsds@alcoa.com
	Alcoa Inc. Rockdale Operations P.O. Box 472 Rockdale, TX 76567 Tel: +1-512-446-8681
	Poços de Caldas Rodovia Poços de Caldas/Andradas, km 10 CEP 37.719-900 Poços de Caldas, Minas Gerais Tel.: (+55 35) 2101-5000 E-mail: pfacomercialprimarios@alcoa.com.br
Emergency Information	CHEMTREC: +1-703-527-3887 +1-800-424-9300 (24 Hour Emergency Telephone, multiple languages spoken); ALCOA: +1-412-553-4001 (24 Hour Emergency Telephone, only English spoken)
Website	For a current Safety Data Sheet, refer to Alcoa websites: www.alcoa.com or internally at my.alcoa.com EHS Community

2. Hazard(s) identification

Physical hazards	Not classified.
Health hazards	Not classified.
Environmental hazards	Not classified.
Authority defined hazards	Combustible dust
Label elements	
Hazard symbol	None.
Signal word	Warning
Hazard statement	May form combustible dust concentrations in air.

Precautionary statement

Prevention

Care should be taken during bulk handling to prevent accumulation/generation over time of 75 micron or finer particles. Use only non-sparking tools and natural bristle brushes. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Prevent dust accumulation to minimize explosion hazard. Take precautionary measures against static discharge.

Response

In case of fire: Use appropriate media for extinction.

Storage

Store in a dry place and/or in closed container. Keep away from heat, sparks and open flame - No smoking. Do not allow chips, fines or dust to contact water, particularly in enclosed areas.

Disposal

Reuse or recycle material whenever possible. Material that cannot be reused may be sent to a metals reclamation facility that is able to handle fines. Waste material that cannot be reclaimed for metal value should be rendered non-reactive prior to disposal.

Hazard(s) not otherwise classified (HNOC)

None known.

Supplemental information

Powder may ignite readily. Powder or dusts dispersed in the air can be explosive.

Explosion/fire hazards may be present when:

- Powder or dust are dispersed in air.
- Powder or dusts are in contact with water.
- Powder or dusts are in contact with certain metal oxides (e.g., rust, copper oxide).

3. Composition/information on ingredients

Composition comments

Complete composition is provided below and may include some components classified as non-hazardous.

Substances

Chemical name	Common name and synonyms	CAS number	%
Aluminum powder		7429-90-5	≥99.7

4. First-aid measures

Eye contact

Dust from processing: Rinse eyes with plenty of water or saline for at least 15 minutes. Consult a physician.

Skin contact

Dust from processing: Wash with soap and water for at least 15 minutes. Get medical attention if irritation develops or persists.

Inhalation

Dust from processing: Remove to fresh air. Check for clear airway, breathing, and presence of pulse. If breathing is difficult, provide oxygen. Loosen any tight clothing on neck or chest. Provide cardiopulmonary resuscitation for persons without pulse or respirations. Consult a physician.

Ingestion

If swallowed, dilute by drinking water. Recommend quantities up to 30 mL (~1 oz.) in children and 250 mL (~9 oz.) in adults. Never give anything by mouth to a victim who is unconscious or is having convulsions. Do NOT induce vomiting. Consult a physician.

Most important symptoms/effects, acute and delayed

Dust from processing: Can cause irritation of the upper respiratory tract. See Section 11 of the SDS for additional information on health hazards.

Medical conditions aggravated by exposure

Asthma, chronic lung disease, and skin rashes.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. In case of shortness of breath, give oxygen.

General information

If exposed or concerned: Get medical advice/attention. In case of shortness of breath, give oxygen.

5. Fire-fighting measures

Suitable extinguishing media

Use Class D extinguishing agents on fines, dust or molten metal.

Unsuitable extinguishing media

DO NOT USE water, halogenated agents, or ABC dry chemical agents. These fire extinguishing agents will react with the burning material.

Specific hazards arising from the chemical	Alcoa aluminum powders were tested by the United States Department of Interior Bureau of Mines in 1991, under UN criteria and found not to meet the definition of a hazard class 4. Care should be taken, however, during bulk handling to prevent accumulation/generation over time of 75 micron or finer particles. May be a potential hazard under the following conditions: <ul style="list-style-type: none"> • Dust clouds may be explosive. Even a minor dust cloud can explode violently. Dust accumulation on the floor, ledges and beams can present a risk of ignition, flame propagation and secondary explosions. • Powder or dusts in contact with water can generate flammable/explosive hydrogen gas. These gases could present an explosion hazard in confined or poorly ventilated spaces. • Powder or dusts are in contact with certain metal oxides (e.g., rust, copper oxide).
Special protective equipment and precautions for firefighters	Firefighters should wear NIOSH approved, positive pressure, self-contained breathing apparatus and full protective clothing when appropriate.
Fire fighting equipment/instructions	Use gentle surface application of Class D extinguishing agent or dry inert granular material (e.g., sand) to cover and ring the burning material. Avoid mixing of the extinguishing agent with the burning material. Apply extinguishing media carefully to avoid creating airborne dust. Do not disturb the material until completely cool. If possible, isolate the burning material to prevent fire spread, and allow the material to burn itself out. Move undamaged containers away from heat or flame, if possible.
General fire hazards	Dust and fines from processing may ignite readily. Dust or fines dispersed in the air can be explosive.
Explosion data	
Sensitivity to mechanical impact	Not sensitive.
Sensitivity to static discharge	Static electricity and formation of sparks must be prevented. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Use non-sparking handling equipment, tools and natural bristle brushes. Cover and reseal partially empty containers. Provide grounding and bonding where necessary to prevent accumulation of static charges during metal dust handling and transfer operations. Obtain and follow the safety procedures and equipment guides contained in Aluminum Association Bulletin F-1 and National Fire Protection Association (NFPA) Standards listed in Section 16. Use non-sparking handling equipment, tools and natural bristle brushes. Cover and reseal partially empty containers. Provide grounding and bonding where necessary to prevent accumulation of static charges during metal dust handling and transfer operations (See Section 15).

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures	Avoid contact with skin and eyes. Use personal protection recommended in Section 8 of the SDS.
Personal precautions, protective equipment and emergency procedures	
For emergency responders	Avoid contact with skin and eyes. Use personal protection recommended in Section 8 of the SDS.
Evacuation procedures	Keep people away from and upwind of spill/leak. Keep unnecessary personnel away.
Methods and materials for containment and cleaning up	Isolate area. Avoid the generation of dusts during clean-up. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Use only non-sparking tools and natural bristle brushes. Use dry cleanup procedures. Keep material dry. Place carefully in dry, water-tight containers. Seal containers. After complete clean-up by sweeping, area may be washed with large amounts of water if necessary. Material that cannot be reused may be sent to a metals reclamation facility that is able to handle fines. Waste material that cannot be reclaimed for metal value should be rendered non-reactive prior to disposal. For waste disposal, see section 13 of the SDS.
Environmental precautions	No specific precautions.

7. Handling and storage

Handling	Keep away from sources of ignition - No smoking. Avoid contact with skin and eyes. Care should be taken during bulk handling to prevent accumulation/generation over time of 75 micron or finer particles. Keep material dry.
Storage	Keep dry. Storage rooms must be of fire-resistant construction. Do not store powder in same room as other combustible materials.

Requirements for Processes Which Generate Dusts or Fines

Obtain and follow the safety procedures and equipment guides contained in Aluminum Association Bulletin TR-2 and National Fire Protection Association (NFPA) brochures listed in Section 16. Use non-sparking handling equipment, tools and natural bristle brush. Cover and reseal partially empty containers. Provide grounding and bonding where necessary to prevent accumulation of static charges during metal dust handling and transfer operations (See Section 15).

Local ventilation and vacuum systems must be designed to handle explosive dusts. Dry vacuums and electrostatic precipitators must not be used, unless specifically approved for use with flammable/explosive dusts. Dust collection systems must be dedicated to aluminum dust only and should be clearly labeled as such. Do not co-mingle fines of aluminum with fines of iron, iron oxide (rust) or other metal oxides.

Process equipment, storage containers, vessels and buildings should be equipped with explosion/pressure relief valves, panels and windows. Precautions must also be taken to prevent water leakage or seepage which could contact the powder. Refer to NFPA 484.

Avoid all ignition sources. Good housekeeping practices must be maintained. Dust accumulation on the floor, ledges and beams can present a risk of ignition, flame propagation and secondary explosions. Do not use compressed air to remove settled material from floors, beams or equipment. Do not allow fines or dust to contact water, particularly in enclosed areas.

8. Exposure controls/personal protection

Occupational exposure limits

U.S. - OSHA

Components

Aluminum powder (CAS 7429-90-5)

Type

TWA

Value

15 mg/m³

Form

(total dust)

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Material

ATOMIZED ALUMINUM POWDER

Type

PEL

Value

5 mg/m³

Form

Respirable dust.

Components

Aluminum powder (CAS 7429-90-5)

Type

TWA

Value

5 mg/m³

Form

Respirable dust.

US ACGIH Threshold Limit Values: Time Weighted Average (TWA): mg/m³, non-standard units

Material

ATOMIZED ALUMINUM POWDER

Type

TWA

Value

1 mg/m³

Form

Respirable fraction.

Components

Aluminum powder (CAS 7429-90-5)

Type

TWA

Value

1 mg/m³

Form

Respirable fraction.

Alcoa

Material

ATOMIZED ALUMINUM POWDER

Type

TWA

Value

3 mg/m³

Form

Respirable fraction

Components

Aluminum powder (CAS 7429-90-5)

Type

TWA

Value

3 mg/m³

Form

Total dust

10 mg/m³

Total dust

General

Use personal protective equipment as required.

Appropriate engineering controls

Dust from processing: Use with adequate explosion-proof ventilation designed to handle particulates to meet the limits listed in Section 8, Exposure Guidelines.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields.

Skin protection

Hand protection

Wear impervious gloves to avoid direct skin contact.

Other	Recommend fire resistant cotton or equivalent full-length fire resistant pants and jackets along with electrically conductive safety shoes or grounding straps. Great caution is required to avoid contact with unprotected electrical devices when wearing conductive safety shoes or grounding straps.
Respiratory protection	Use NIOSH-approved respiratory protection as specified by an Industrial Hygienist or other qualified professional if concentrations exceed the limits listed in Section 8. Suggested respiratory protection: N95.
Thermal hazards	Not applicable.
General hygiene considerations	Handle in accordance with good industrial hygiene and safety practice. When using, do not eat, drink or smoke. Wash hands before breaks and immediately after handling the product.
Control parameters	

9. Physical and chemical properties

Form	Solid, powder.
Color	Silvery to gray.
Odor	Odorless
Odor threshold	Not applicable
pH	Not applicable
Density	0.80 - 1.30 g/cm ³
Melting point/freezing point	1194.8 - 1214.6 °F (646 - 657 °C) 1220 °F (660 °C)
Initial boiling point and boiling range	Not determined 4220.6 °F (2327 °C)
Flash point	Not applicable
Evaporation rate	Not applicable
Flammability (solid, gas)	Not applicable.
Upper/lower flammability or explosive limits	
Flammability limit - upper (%)	Not determined
Flammability limit - lower (%)	40 mg/l
Explosive properties	Dust can form an explosive mixture in air. Dust accumulation from this product may present an explosion hazard in the presence of an ignition source.
Dust explosion properties	
St class	Very strong explosion.
Vapor pressure	Not applicable
Vapor density	Not applicable
Relative density	Not determined
Solubility(ies)	Insoluble Insoluble
Partition coefficient (n-octanol/water)	Not applicable. Not applicable
Auto-ignition temperature	1202 °F (650 °C) layered
Decomposition temperature	Not applicable
Viscosity	Not applicable

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Stable under normal conditions of use, storage, and transportation as shipped.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	<ul style="list-style-type: none"> • Water: Slowly generates flammable and explosive hydrogen gas and heat. Generation rate is greatly increased with smaller particles (e.g., fines and dusts). Water/aluminum mixtures may be hazardous when confined. • Heat: Oxidizes at a rate dependent upon temperature and particle size.

Incompatible materials	<ul style="list-style-type: none"> • Acids and alkalis: Reacts to generate flammable/explosive hydrogen gas. Generation rate is greatly increased with smaller particles (e.g., fines and dusts). • Strong oxidizers: Violent reaction with considerable heat generation. Can react explosively with nitrates (e.g., ammonium nitrate and fertilizers containing nitrate) when heated or molten. • Halogenated compounds: Many halogenated hydrocarbons, including halogenated fire extinguishing agents, can react violently with finely divided or molten aluminum. • Iron oxide (rust) and other metal oxides (e.g., copper and lead oxides): A violent thermite reaction generating considerable heat can occur. Reaction with aluminum fines and dusts requires only very weak ignition sources for initiation. • Iron powder and water: Explosive reaction forming hydrogen gas when heated above 1470°F (800°C).
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Health effects associated with ingredients

Aluminum dust/fines and fumes: Low health risk by inhalation. Generally considered to be biologically inert.

Health effects associated with compounds formed during processing

No new/additional compounds are expected to be formed during processing.

Information on likely routes of exposure

Eye contact	Can cause mechanical irritation.
Skin contact	Dust from processing: Can cause mechanical irritation.
Inhalation	Dust from processing: Can cause irritation of the upper respiratory tract.
Ingestion	Can cause irritation of the gastrointestinal tract.

Symptoms related to the physical, chemical and toxicological characteristics
 Dust from processing: Can cause mechanical irritation. Dust: Can cause irritation of the upper respiratory tract.

Information on toxicological effects

Acute toxicity	Based on available data, the classification criteria are not met.
Skin corrosion/irritation	Non-corrosive.
Serious eye damage/eye irritation	Can cause mechanical irritation.
Respiratory or skin sensitization	
Respiratory sensitization	Not a respiratory sensitizer.
Skin sensitization	Not a skin sensitizer.
Germ cell mutagenicity	Based on available data, the classification criteria are not met.
Neurological effects	Based on available data, the classification criteria are not met.
Pre-existing conditions aggravated by exposure	Asthma, chronic lung disease, and skin rashes.
Carcinogenicity	Does not present any cancer hazards.
Reproductive toxicity	Does not present any reproductive hazards.
Routes of exposure	Inhalation. Skin contact. Eye contact.
Specific target organ toxicity - single exposure	Based on available data, the classification criteria are not met.
Specific target organ toxicity - repeated exposure	Based on available data, the classification criteria are not met.
Aspiration hazard	Not an aspiration hazard.
Chronic effects	Not classified.
Further information	None known.

12. Ecological information

Ecotoxicity Not expected to be harmful to aquatic organisms.

ATOMIZED ALUMINUM POWDER

Aquatic

Fish	LC50	Rainbow trout,donaldson trout (Oncorhynchus mykiss)	0.16 mg/l, 96 hours
------	------	--	---------------------

Persistence and degradability The product is not biodegradable.

Bioaccumulative potential The product does not contain any substances expected to be bioaccumulating.

Mobility in soil Not considered mobile.

Mobility in general Not considered mobile.

Other adverse effects Not available.

13. Disposal considerations

Disposal instructions Reuse or recycle material whenever possible. Material that cannot be reused may be sent to a metals reclamation facility that is able to handle fines. Waste material that cannot be reclaimed for metal value should be rendered non-reactive prior to disposal.

Local disposal regulations Dispose in accordance with all applicable regulations.

Waste codes RCRA Status: Not federally regulated in the U.S. if disposed of "as is."
RCRA waste codes other than described here may apply depending on use of the product. Status must be determined at the point of waste generation. Refer to 40 CFR 261 or state equivalent in the U.S.

Waste from residues / unused products If reuse or recycling is not possible, disposal must be made according to local or governmental regulations.

Contaminated packaging Dispose of in accordance with local regulations.

14. Transport information

General Shipping Information

Basic Shipping Information

ID number	-
Proper shipping name	Not regulated
Hazard class	-
Packing group	-

General Shipping Notes

- This material has been tested under UN criteria and found not to meet the definition of a hazard class 4 and does not meet the definition of any other hazard class.
- Standard Transportation Commodity Code: 33-991-19.
- HTS (Harmonized Tariff Schedule) code: 7603.10.0000.
- The import/export HTS (Harmonized Tariff Schedule) code given above is the United States HTS code provided by Alcoa's Customs Compliance Office in Knoxville, TN. Other country specific HTS codes may apply. If available, more information on the HTS codes will be provided on country specific Material Safety Data Sheets.
- When "Not regulated", enter the proper freight classification, SDS Number and Product Name onto the shipping paperwork.

Disclaimer

This section provides basic classification information and, where relevant, information with respect to specific modal regulations, environmental hazards and special precautions. Otherwise, it is presumed that the information is not available/not relevant

15. Regulatory information

US federal regulations

In reference to Title VI of the Clean Air Act of 1990, this material does not contain nor was it manufactured using ozone-depleting chemicals.

All electrical equipment must be suitable for use in hazardous atmospheres involving aluminum powder in accordance with 29 CFR 1910.307. The National Electrical Code, NFPA 70, contains guidelines for determining the type and design of equipment and installation which will meet this requirement.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Section 311/312 hazard categories	Immediate Hazard - No	
	Delayed Hazard - No	
	Fire Hazard - No	
	Pressure Hazard - Yes	If dust clouds are generated
	Reactivity Hazard - No	

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical Yes

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
Aluminum powder	7429-90-5	≥99.7

US state regulations

US. California Proposition 65

Not Listed.

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

SDS Status

August 11, 2015: Change(s) in Section: 1 and 16.
April 30, 2015 (April 30, 2015 Minor modification 0123usa): Change(s) in Section: 1, 2 Minor modification..
January 7, 2015: Change(s) in Section: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15 and 16.

Origination date: September 17, 1980

Hazardous Materials Control Committee
Preparer: Jim Perriello, +1-865-977-2051.

SDS System Number: 145308

Revision date

August 11, 2015.

Version

08

Revision Information

Product and Company Identification: Synonyms
Composition / Information on Ingredients: Disclosure Overrides
Physical & Chemical Properties: Multiple Properties
Transport Information: Agency Name, Packaging Type, and Transport Mode Selection
Regulatory Information: United States
HazReg Data: North America
GHS: Classification

Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available.

Other information

- Aluminum Association Bulletin TR-2, "Recommendations for Storage and Handling of Aluminum Pigments and Powders." The Aluminum Association, 1525 Wilson Boulevard, Suite 600, Arlington, Virginia 22209, www.aluminum.org.
- Aluminum Association, "Guidelines for Handling Molten Aluminum, The Aluminum Association, 1525 Wilson Boulevard, Suite 600, Arlington, Virginia 22209, www.aluminum.org.
- NFPA 484, Standard for Combustible Metals (NFPA phone: 800-344-3555)
- NFPA 654, Standard for the Prevention of Fire and Dust Explosions from the Manufacturing, Processing, and Handling of Combustible Particulate Solids
- NFPA 70, Standard for National Electrical Code (Electrical Equipment, Grounding and Bonding)
- NFPA 77, Standard for Static Electricity
- NFPA 68, Standard on Explosion Protection by Deflagration Venting • NFPA 69, Standard on Explosion Prevention Systems

Key/Legend:

ACGIH	American Conference of Governmental Industrial Hygienists
AICS	Australian Inventory of Chemical Substances
CAS	Chemical Abstract Services
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CFR	Code of Federal Regulations
CPR	Cardio-pulmonary Resuscitation
DOT	Department of Transportation
DSL	Domestic Substances List (Canada)
EC	Effective Concentration
ED	Effective Dose
EINECS	European Inventory of Existing Commercial Chemical Substances
ENCS	Japan - Existing and New Chemical Substances
EWC	European Waste Catalogue
EPA	Environmental Protective Agency
IARC	International Agency for Research on Cancer
LC	Lethal Concentration
LD	Lethal Dose
MAK	Maximum Workplace Concentration (Germany) "maximale Arbeitsplatz-Konzentration"
NDSL	Non-Domestic Substances List (Canada)
NIOSH	National Institute for Occupational Safety and Health
NTP	National Toxicology Program
OEL	Occupational Exposure Limit
OSHA	Occupational Safety and Health Administration
PIN	Product Identification Number
PMCC	Pensky Marten Closed Cup
RCRA	Resource Conservation and Recovery Act
SARA	Superfund Amendments and Reauthorization Act
SIMDUT	Système d'Information sur les Matières Dangereuses Utilisées au Travail
STEL	Short Term Exposure Limit
TCLP	Toxic Chemicals Leachate Program
TDG	Transportation of Dangerous Goods
TLV	Threshold Limit Value
TSCA	Toxic Substances Control Act
TWA	Time Weighted Average
WHMIS	Workplace Hazardous Materials Information System

m meter, cm centimeter, mm millimeter, in inch,
g gram, kg kilogram, lb pound, µg microgram,
ppm parts per million, ft feet

*** End of SDS ***

Hazard statement

May form combustible dust concentrations in air.

Precautionary statement

Prevention

Care should be taken during bulk handling to prevent accumulation/generation over time of 75 micron or finer particles. Use only non-sparking tools and natural bristle brushes. Keep away from heat/sparks/open flames/hot surfaces - No smoking. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Prevent dust accumulation to minimize explosion hazard. Take precautionary measures against static discharge.

Response

In case of fire: Use appropriate media for extinction.

Storage

Store in a dry place and/or in closed container. Keep away from heat, sparks and open flame - No smoking. Do not allow chips, fines or dust to contact water, particularly in enclosed areas.

Disposal

Reuse or recycle material whenever possible. Material that cannot be reused may be sent to a metals reclamation facility that is able to handle fines. Waste material that cannot be reclaimed for metal value should be rendered non-reactive prior to disposal.

Warning

Supplemental information

Powder may ignite readily. Powder or dusts dispersed in the air can be explosive.

Explosion/fire hazards may be present when:

- Powder or dust are dispersed in air.
- Powder or dusts are in contact with water.
- Powder or dusts are in contact with certain metal oxides (e.g., rust, copper oxide).

FIRE FIGHTING MEASURES: Use gentle surface application of Class D extinguishing agent or dry inert granular material (e.g., sand) to cover and ring the burning material. Avoid mixing of the extinguishing agent with the burning material. If possible, isolate the burning material to prevent fire spread, and allow the material to burn itself out. Do not disturb the material until completely cool. Move undamaged containers away from heat or flame, if possible.

DO NOT USE water, halogenated agents, or ABC dry chemical agents.

These fire extinguishing agents will react with the burning material.

IN CASE OF SPILL: Avoid dusting of powder to the greatest extent possible. Use only non-sparking tools and natural bristle brushes. ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Prohibit smoking. Use dry cleanup procedures. Place carefully in dry, water-tight containers. Seal containers. After complete clean-up by sweeping, area may be washed with large amounts of water if necessary.

See Alcoa SDS Number 0123.



**Material Safety
Data Sheets**

Division of Facilities Services

**DOD Hazardous Material Information (ANSI Format)
For Cornell University Convenience Only**

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Section 1 - Product and Company Identification	Section 9 - Physical & Chemical Properties
Section 2 - Compositon/Information on Ingredients	Section 10 - Stability & Reactivity Data
Section 3 - Hazards Identification Including Emergency Overview	Section 11 - Toxicological Information
Section 4 - First Aid Measures	Section 12 - Ecological Information
Section 5 - Fire Fighting Measures	Section 13 - Disposal Considerations
Section 6 - Accidental Release Measures	Section 14 - MSDS Transport Information
Section 7 - Handling and Storage	Section 15 - Regulatory Information
Section 8 - Exposure Controls & Personal Protection	Section 16 - Other Information

The information in this document is compiled from information maintained by the United States Department of Defense (DOD). Anyone using this information is solely responsible for the accuracy and applicability of this information to a particular use or situation.

Cornell University does not in any way warrant or imply the applicability, viability or use of this information to any person or for use in any situation.

**Section 1 - Product and Company Identification
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

Product Identification: ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Date of MSDS: 08/01/1997 **Technical Review Date:** 09/01/1999

FSC: 6810 **NIIN:** LIIN: 00N092040

Submitter: N NF

Status Code: A

MFN: 01

Article: N

Kit Part: N

Manufacturer's Information

Manufacturer's Name: UNITED MINERAL & CHEMICAL CORP
Manufacturer's Address1: 1100 VALLEYBROOK AVE
Manufacturer's Address2: LYNDHURST, NJ 07071
Manufacturer's Country: US
General Information Telephone: 201-507-3300
Emergency Telephone: (800)424-9300
Emergency Telephone: (800)424-9300
Chemtec Telephone: (800)424-9300
Proprietary: N
Reviewed: Y
Published: Y
CAGE: 87730

Contractor Information

Contractor's Name: UNITED MINERAL & CHEMICAL CORP
Contractor's Address1: 1100 VALLEYBROOK AVE
Contractor's Address2: LYNDHURST, NJ 07071
Contractor's Telephone: 201-507-3300
Contractor's CAGE: 87730

Section 2 - Compositon/Information on Ingredients

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Ingredient Name: ARSENIC; (ARSENIC METAL)
Ingredient CAS Number: 7440-38-2 **Ingredient CAS Code:** T
RTECS Number: CG0525000 **RTECS Code:** T
=WT: 100. **=WT Code:** M
=Volume: **=Volume Code:**
>WT: **>WT Code:**
>Volume: **>Volume Code:**
<WT: **<WT Code:**
<Volume: **<Volume Code:**
% Low WT: **% Low WT Code:**
% High WT: **% High WT Code:**
% Low Volume: **% Low Volume Code:**
% High Volume: **% High Volume Code:**
% Text:
% Enviromental Weight:
Other REC Limits: N/P
OSHA PEL: N/P **OSHA PEL Code:**
OSHA STEL: N/P **OSHA STEL Code:**
ACGIH TLV: 0.01 MG/M3 **ACGIH TLV Code:** T
ACGIH STEL: NOT ESTABLISHED **ACGIH STEL Code:** T
EPA Reporting Quantity: 1 LB
DOT Reporting Quantity: 1 LB
Ozone Depleting Chemical: N

Section 3 - Hazards Identification, Including Emergency Overview

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Health Hazards Acute & Chronic: ARSENIC METAL IS NOT AS READILY AVAIL IN THE BODY AS ARSENIC IN THE FORM OF DUST OR VAP OR WHEN PROCESSED INTO ARSENIC CMPDS (ARSENICALS). INORGANIC ARSENICALS ARE MORE TOXIC THAN ORGANIC ARSENICALS. ACUTE EFTS: ARSENIC IS POISON BY SUBCUTANEOUS, INTRAMUSCULAR & INTRAPERITONEAL ROUTES. ACUTE ARSENIC POISONING FROM INGEST RSLTS IN MARKED IRRIT OF STOMACH & INTESTINES W/NAUS, VOMIT & DIARR. IN SEV C ASES STOOLS & VOMIT ARE BLOODY & PATIENT MAY GO INTO COLLAPSE & SHOCK W/WEAK, RAPID PULSE, COLD SWEATS, COMA & DEATH. INHAL MAY CAUSE ULCERATION OF NASAL SEPTUM, RESP IRRIT. SKIN/EYE CNTCT MAY CAUSE DERM, SKIN & EYE (EFTS OF OVEREXP)

Signs & Symptoms of Overexposure:

HLTH HAZS: IRRIT. CHRONIC EFTS: ARSENIC IS CONFIRMED HUMAN CARCIN PRODUCING LIVER TUMORS & AN EXPERIMENTAL TERATOGEN (MAY CAUSE DMG TO DEVELOPING FETUS). CHRONIC ARSENIC POISONING MAY INCL ANY/ALL OF FOLLOWING: DIGEST SYS DISTURBS, LOSS OF APPETITE, CRAMPS, NAUS, CONSTIP, DIARR; LIVER DMG WHICH MAY RSLT IN JAUN; DISTURBS OF BLOOD, KIDNEYS & NERVOUS SYS; SKIN ABNORMS INCL ITCHING, PIGMENTATION & POS S CANCEROUS CHGS. TARGET ORGANS FOR INORGANIC CMPDS AS AS): LIVER, KIDNEYS, SKIN, LUNGS, LYMPHATIC SYS. TLV: 0.01 MG/M3 TWA ARSENIC, ELEMENTAL & INORGANIC CMPDS (EXCEPT ARSINE), AS AS. OSHA PEL: (SUPD AT)

Medical Conditions Aggravated by Exposure:

KNOWN EFFECTS ON OTHER ILLNESSES: GASTROINTESTINAL. NERVOUS SYSTEM. SKIN. LIVER & KIDNEY PROBLEMS. AFTER EXPOSURE HAVE URINE TEST.

LD50 LC50 Mixture: LD50: (ORAL, RAT) 763 MG/M3

Route of Entry Indicators:

Inhalation: YES

Skin: YES

Ingestion: YES

Carcinogenicity Indicators

NTP: YES

IARC: YES

OSHA: YES

Carcinogenicity Explanation: ARSENIC: IARC MONOGRAPHS, SUPPLEMENT, VOL 7, PG 100, 1987: GROUP 1. NTP 8TH ANNUAL REPORT ON CARCINOGENS, 1998: KNOWN TO BE CARCINOGEN. OSHA REGULATED: CFR 29 1910.1018.

Section 4 - First Aid Measures
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

First Aid:

SKIN: FLUSH WITH SOAP AND WATER. AVOID RUBBING INTO SKIN. CONTACT MD IMMEDIATELY. EYES: FLUSH WITH WATER FOR AT LEAST 15 MINUTES. CONTACT PHYSICIAN IMMEDIATELY. INHALATION: REMOVE TO FRESH AIR. PROVIDE OXYGEN IF NECESSARY. CONTACT PHYSICIAN IMMEDIATELY. INGESTION: TREATMENT WITH BAS(DIMERCAPTOL) IS OF QUESTIONABLE EFFECTIVENESS IN TRIVALENT ARSENIC COMPOUNDS. INDUCE VOMITING AND DO GASTRIC LAVAGE. GET PERSONNEL TO HOSPITAL IMMEDIATELY. A PHYSICIAN CAN INITIATE AN EXCHANGE TRANSFUSION AND DIALYSIS. ALSO ABSORPTION AND REMOVAL WITH ANIMAL BONE COAL OR $Fe(OH)_2$ SHOULD BE DONE.

Section 5 - Fire Fighting Measures
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Fire Fighting Procedures:

USE NIOSH APPRVD SCBA & FULL PROT EQUIP (FP N). RESTRICT PERS NOT WEARING PROT EQUIP FROM AREA. TRY TO SNUFF FIRE W/SAND, DRY MEDIA, FOAM OR CO*2. IF NO OTHER OPTIONS AVAILABLE, USE WATER & ALWAYS WEAR NIOSH APPRVD SCBA OR NIOSH TOXIC VAPOR RESP. POISONOUS GASES ARE PRODUCED IN FIRE, INCLUDING ARSENIC OXIDES.

Unusual Fire or Explosion Hazard:

ARSENIC, WHEN HEATED OR IN CONTACT W/ACID OR ACID FUMES, CAN PRODUCE HIGHLY TOXIC FUMES. ARSENIC REACTS VIGOROUSLY W/OXIDIZING MATLS. ARSENIC IS FLAMMABLE IN FORM OF DUST WHEN EXPOSED TO HEAT OR FLAME OR BY CHEMICAL RXN W/POWERFUL OXIDIZERS. SLIGHT EXPLOSION HAZ EXISTS IN FORM OF DUST WHEN EXPOSED TO (ECOLOGICAL INFO)

Extinguishing Media:

FOAM, CARBON DIOXIDE, DRY CHEMICAL.

Flash Point: Flash Point Text: NONE

Autoignition Temperature:

Autoignition Temperature Text: N/K

Lower Limit(s): N/A

Upper Limit(s): N/A

Section 6 - Accidental Release Measures
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Spill Release Procedures:

RESTRICT PERSONS NOT WEARING PROTECTIVE EQUIPMENT FROM AREA UNTIL CLEANUP IS COMPLETE. WEARING NIOSH APPROVED RESPIRATOR, GLOVES, GOGGLES, LAB COAT, GATHER UP CHUNKS, RODS OR GRANULES WITH VACUUM OR UTENSILS RESERVED FOR POISONOUS SOLIDS. AVOID RAISING DUST. VENTILATE THE AREA AFTER CLEANUP IS COMPLETE.

Section 7 - Handling and Storage
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Handling and Storage Precautions:**Other Precautions:**

Section 8 - Exposure Controls & Personal Protection
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Respiratory Protection:

NIOSH APPROVED, AIR PURIFYING, TOXIC VAPOR RESPIRATOR TO PARTICULATE AND FUME AIR LEVEL. FOR INORGANIC ARSENIC APPLICATIONS, SEE 29 CFR 1910.1018 FOR PROPER RESPIRATOR SELECTION.

Ventilation:

LOC EXHST/MECH (GEN) SCRUBBER OR TRAP IF POSS TO MAINTAIN EXPOS TO LESS THAN PERMISSIBLE LIMITS FOR ELEMENTAL ARSENIC & ANY CMPDS BEING GENERATED.

Protective Gloves:

NEOPRENE OR PLASTIC.

Eye Protection: ANSI APPROVED CHEMICAL WORKERS GOGGLES (FP N).**Other Protective Equipment:** ANSI APPROVED EYE WASH AND DELUGE SHOWER (FP N). LAB COAT.**Work Hygenic Practices:** N/P**Supplemental Health & Safety Information:** EFTS OF OVEREXP: 0.01 MG/M3 AS AS & INORGANIC CMPDS; 0.5 AS AS ORGANIC CMPDS. ACGIH TLV: 0.01 MG/M3 TWA ARSENIC, ELEMENTAL & INORGANIC CMPDS (EXCEPT ARSINE), AS AS. ALSO SEE TOXICOLOGICAL INFO. WASTE DISP METH: HAZ DEPENDING ON LEVEL OF TOX CHARACT OF ARSENIC. SEE 40 CFR 261.24 FOR DETERMINATION. (OTHER INFO)

Section 9 - Physical & Chemical Properties
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

HCC:**NRC/State License Number:****Net Property Weight for Ammo:****Boiling Point:** =612.C, 1133.6F **Boiling Point Text:** SUBLIMES**Melting/Freezing Point:** =814.C, #####F **Melting/Freezing Text:** @ 36 ATM. FP:N/A**Decomposition Point:** **Decomposition Text:** N/P**Vapor Pressure:** 1 MMHG @ 372C **Vapor Density:** N/A**Percent Volatile Organic Content:****Specific Gravity:** 5.727**Volatile Organic Content Pounds per Gallon:****pH:** NONE-0% IN H*2O**Volatile Organic Content Grams per Liter:****Viscosity:** N/P**Evaporation Weight and Reference:** N/A**Solubility in Water:** INSOLUBLE**Appearance and Odor:** SILVER GRAY CRYSTALLINE CHUNKS, RODS OR GRANULES; NO ODOR AS (ECOLOGICAL INFO)**Percent Volatiles by Volume:** N/A (BY WT)**Corrosion Rate:** N/P

Section 10 - Stability & Reactivity Data
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Stability Indicator: YES**Materials to Avoid:**

INCOMPATIBLE W/BROMINE AZIDE, DIRUBIDIUM ACETYLIDE, HALOGENS, PALLADIUM ZINC, PLATINUM, NCL*3, AGNO*3, CRO*3, NA*2O*2, HEXAFLUOROISOPROPYLIDENEAMINO LITHIUM. CAN REACT W/ACIDS OR ACID FUMES & POWERFUL OXIDIZERS SUCH AS BROM

Stability Condition to Avoid:

AVOID OPEN CONTAINERS AND CONTACT WITH INCOMPATIBLE MATERIALS.

Hazardous Decomposition Products:

ARSENIC FUMES, ARSINE, OTHER ARSENIC COMPOUNDS.

Hazardous Polymerization Indicator: NO**Conditions to Avoid Polymerization:**

N/P

Section 11 - Toxicological Information

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Toxicological Information:

LD50: TDLO 605 ?G/KG. ORAL-MAN TDLO 7857 MG/KG/55Y SKIN. DERMAL IRRITATION-RABBIT: UNKNOWN; SUBCUTANEOUS IMPLANT RABBIT LTLO 75 MG/KG. EYE IRRITATION-RABBIT: UNKNOWN.

Section 12 - Ecological Information**ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

Ecological Information:

N/P. EXPLO HAZ: FLAME. IN EVENT OF A FIRE OR SPILL CONTACT THE STATE DEPARTMENT OF THE ENVIRONMENT & YOUR REGIONAL OFFICE OF THE FEDERAL EPA. PHYSICAL DATA - APPEAR/ODOR: METAL AS COMPOUND, ASH*3, HAS GARLIC ODOR. ODOR THRESHOLD: N/A. MATLS TO AVOID: CHLORATES, IODATES, PEROXIDES, LITHIUM, NACL*3, KMNO*3, RB*2C*2, AGNO*4, NOCL, IF*5, CRO*3, CLF*3, CLO, BRF*3, BRF*5, BRN*3, RBC*3BCH, CSC*3BCH.

Section 13 - Disposal Considerations**ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

Waste Disposal Methods:

SOLID WASTES SHOULD BE VITRIFIED, PLACED IN LABELED CNTNR & BURIED IN EPA SUPERVISED FACILITY. ETCHING SOLNS & CUTTING WASTES SHOULD BE PRECIPITATED, CEMENTED/VITRIFIED & PLACED IN METAL/PLASTIC LABEL ED CNTNRS & BURIED IN EPA SUPERVISED FACILITY. PASS GAS THRU POTASSIUM PERMANGANATE, PRECIPITATE & TREAT AS ABOVE. WASTE MAY BE CONSIDERED (SUPDAT)

Section 14 - MSDS Transport Information**ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

Transport Information:

DOT REGULATED: YES. RQ: (NA - PIECES ARE LARGER THAN 100 MICROMETERS IN DIAMETER). IF REGULATED, PROPER SHIPPING NAME: ARSENIC. HAZARD CLASS: (6.1). IDENTIFICATION NO: (UN1558). PACKING GROUP: (III). LABEL REQUIRED: (POISON). INLAND B/L: ARSENIC, 6.1, UN1558, PACKING GROUP II, POISON. EMERGENCY RESPONSE GUIDE NO: (152).

Section 15 - Regulatory Information**ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

SARA Title III Information:

SARA TITLE III, SECT 313: LISTED.

Federal Regulatory Information:

TSCA: WE CERTIFY THAT ALL COMPONENTS OF THIS PRODUCT ARE REGISTERED UNDER THE REGULATIONS OF THE TOXIC SUBSTANCES CONTROL ACT. HMIS: HEALTH (4); FLAMMABILITY (0); REACTIVITY (1).

State Regulatory Information:

Section 16 - Other Information**ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

Other Information:

WASTE DISP METH: HAZARDOUS DEPENDING ON LEVEL OF TOXICITY CHARACTERISTIC OF ARSENIC. SEE 40 CFR 261.24 FOR DETERMINATION. RCRA HAZARDOUS WASTE: YES RCRA @: D004; IF TESTED POSITIVE AS CHARACT OF TOXIC ITY FOR ARSENIC. CERCLA: YES. RQ (1 LB RQ IS APPLICABLE ONLY IF DIAMETER OF PIECES OF SOLID METAL RELEASED IS LESS THAN 100 MICROMETERS OR 0.004 INCH. THIS PROD FORM IS LARGER THAN 100 MICROMETERS & H AS NO RQ IN ITS CURRENT FORM. IF AS HAZ WASTE CHARACT OF ARSENIC, THEN RQ=1LB. FOLLOW ALL LOCAL, STATE AND FEDERAL INFO & REGULATIONS.

HAZCOM Label Information

Product Identification: ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE
CAGE: 87730

Assigned Individual: N

Company Name: UNITED MINERAL & CHEMICAL CORP

Company PO Box:

Company Street Address1: 1100 VALLEYBROOK AVE

Company Street Address2: LYNDHURST, NJ 07071 US

Health Emergency Telephone: (800)424-9300

Label Required Indicator: Y

Date Label Reviewed: 09/01/1999

Status Code: A

Manufacturer's Label Number:

Date of Label:

Year Procured: N/K

Organization Code: F

Chronic Hazard Indicator: Y

Eye Protection Indicator: YES

Skin Protection Indicator: YES

Respiratory Protection Indicator: YES

Signal Word: DANGER

Health Hazard: Severe

Contact Hazard: Severe

Fire Hazard: None

Reactivity Hazard: Slight

8/9/2002 10:40:46 AM

MSDS # 84.00

Barium Metal**Section 1: Product and Company Identification****Barium Metal****Synonyms/General Names:** Barium**Product Use:** For educational use only**Manufacturer:** Columbus Chemical Industries, Inc., Columbus, WI 53925.**24 Hour Emergency Information Telephone Numbers****CHEMTREC (USA): 800-424-9300****CANUTEC (Canada): 613-424-6666**

ScholarAR Chemistry; 5100 W. Henrietta Rd, Rochester, NY 14586; (866) 260-0501; www.Scholarchemistry.com

Section 2: Hazards Identification*Soft, silvery, lustrous metal immersed in heavy mineral oil; no odor.***HMIS (0 to 4)**

Health	3
Fire Hazard	3
Reactivity	2

WARNING! Flammable solid, dangerous when wet, highly toxic by ingestion.

Flammable solid, keep away from all ignition sources. Contact with water produces flammable gas.

Target organs: Central nervous system, kidneys.

This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Section 3: Composition / Information on Ingredients

Barium Metal (7440-39-3), 100%

Section 4: First Aid Measures*Always seek professional medical attention after first aid measures are provided.***Eyes:** Immediately flush eyes with excess water for 15 minutes, lifting lower and upper eyelids occasionally.**Skin:** Immediately flush skin with excess water for 15 minutes while removing contaminated clothing.**Ingestion:** Call Poison Control immediately. Rinse mouth with cold water. Give victim 1-2 tbsps of activated charcoal mixed with 8 oz water.**Inhalation:** Remove to fresh air. If not breathing, give artificial respiration.**Section 5: Fire Fighting Measures**

Flammable solid. When heated to decomposition, emits acrid fumes and explosive hydrogen gas.

Protective equipment and precautions for firefighters: Do Not Use carbon dioxide, foam, water or halogenated extinguishing agents. Use class D extinguisher or smother with dry sand, dry clay, dry ground limestone or dry graphite. Firefighters should wear full fire fighting turn-out gear and respiratory protection (SCBA).
Material is not sensitive to mechanical impact or static discharge.**Section 6: Accidental Release Measures**

Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all ignition sources and ventilate area. Sweep up spill and place material in a dry container for disposal. See Section 13 for disposal information.

Section 7: Handling and Storage**Red****Handling:** Use with adequate ventilation and do not breathe dust or vapor. Avoid contact with skin, eyes, or clothing. Wash hands thoroughly after handling.**Storage:** Store in Flammable Area [Red Storage] with other flammable materials and away from any strong oxidizers. Store in a dedicated flammables cabinet. Store in a cool, dry, well-ventilated, locked store room away from incompatible materials.**Section 8: Exposure Controls / Personal Protection**Use ventilation to keep airborne concentrations below exposure limits. Have approved eyewash facility, safety shower, and fire extinguishers readily available. Wear chemical splash goggles and chemical resistant clothing such as gloves and aprons. Wash hands thoroughly after handling material and before eating or drinking. Use NIOSH-approved respirator with a dust cartridge. Exposure guidelines: Barium compounds: OSHA PEL: 0.5 mg/m³ and ACGIH TLV: 0.5 mg/m³, STEL: N/A.

Section 9: Physical and Chemical Properties

Molecular formula	Ba.	Appearance	Silver metal in heavy mineral oil.
Molecular weight	137.33.	Odor	No odor.
Specific Gravity	3.62 g/mL @ 20°C..	Odor Threshold	N/A.
Vapor Density (air=1)	N/A.	Solubility	Reacts violently with water.
Melting Point	850°C.	Evaporation rate	N/A (<i>Butyl acetate = 1</i>).
Boiling Point/Range	1695°C.	Partition Coefficient	N/A (<i>log P_{ow}</i>).
Vapor Pressure (20°C)	N/A.	pH	N/A.
Flash Point:	N/A.	UEL	N/A.
Autoignition Temp.:	N/A.	LEL	N/A.

N/A = Not available or applicable

Section 10: Stability and Reactivity

Avoid heat and ignition sources

Stability: Stable under normal conditions of use.**Incompatibility:** Water, acids, chlorine, iodine, bromine and oxidizing agents.**Shelf life:** Indefinite if stored properly.**Section 11: Toxicology Information****Acute Symptoms/Signs of exposure:** *Eyes:* Stinging pain, burns, watering of eyes, inflammation of eyelids and conjunctivitis. Avoid looking at burning magnesium. *Skin:* Irritation, redness, burns. Powdered metal ignites readily on skin causing burns.**Ingestion:** Nausea, vomiting and headache. **Inhalation:** Rapid irregular breathing, headache, burns to mucous membranes. Inhalation of dust or fumes causes metal fume fever.**Chronic Effects:** Repeated/prolonged skin contact may cause dryness or rashes.**Sensitization:** none expected*Barium: LD50 [oral, rat]; Not Available; LC50 [rat]; Not Available; LD50 Dermal [rabbit]; Not Available*
*Material has not been found to be a carcinogen nor produce genetic, reproductive, or developmental effects.***Section 12: Ecological Information****Ecotoxicity (aquatic and terrestrial):** LC50 – 500mg/l – 96h – Cyprinodon variegates.**Section 13: Disposal Considerations**

Check with all applicable local, regional, and national laws and regulations. Local regulations may be more stringent than regional or national regulations. Use a licensed chemical waste disposal firm for proper disposal.

Section 14: Transport Information

DOT Shipping Name:	Barium.	Canada TDG:	Barium .
DOT Hazard Class:	4.3, pg II.	Hazard Class:	4.3, pg II.
Identification Number:	UN1400.	UN Number:	UN1400.

Section 15: Regulatory Information**EINECS:** Listed (231-149.1) .**WHMIS Canada:** B6:D2B: Reactive Flammable: Toxic Material.**TSCA:** All components are listed or are exempt.**California Proposition 65:** Not listed.*The product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.***Section 16: Other Information****Current Issue Date:** September 22, 2012

Disclaimer: Scholar Chemistry and Columbus Chemical Industries, Inc., ("S&C") believes that the information herein is factual but is not intended to be all inclusive. The information relates only to the specific material designated and does not relate to its use in combination with other materials or its use as to any particular process. Because safety standards and regulations are subject to change and because S&C has no continuing control over the material, those handling, storing or using the material should satisfy themselves that they have current information regarding the particular way the material is handled, stored or used and that the same is done in accordance with federal, state and local law. S&C makes no warranty, expressed or implied, including (without limitation) warranties with respect to the completeness or continuing accuracy of the information contained herein or with respect to fitness for any particular use.

SAFETY DATA SHEET

Version 4.6
Revision Date 12/29/2015
Print Date 01/29/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Beryllium

Product Number : 378135
Brand : Aldrich

CAS-No. : 7440-41-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 3), H301
Acute toxicity, Inhalation (Category 2), H330
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Skin sensitisation (Category 1), H317
Carcinogenicity (Category 1B), H350
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Specific target organ toxicity - repeated exposure (Category 1), H372

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H301 : Toxic if swallowed.
H315 : Causes skin irritation.
H317 : May cause an allergic skin reaction.
H319 : Causes serious eye irritation.
H330 : Fatal if inhaled.
H335 : May cause respiratory irritation.
H350 : May cause cancer.

H372	Causes damage to organs through prolonged or repeated exposure.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P272	Contaminated work clothing should not be allowed out of the workplace.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P284	Wear respiratory protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Be
Molecular weight	:	9.01 g/mol
CAS-No.	:	7440-41-7
EC-No.	:	231-150-7

Hazardous components

Component	Classification	Concentration
Beryllium foil	Acute Tox. 3; Acute Tox. 2; Skin Irrit. 2; Eye Irrit. 2A; Skin Sens. 1; Carc. 1B; STOT SE 3; STOT RE 1; H301, H315, H317, H319, H330, H335, H350, H372	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Beryllium oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Beryllium foil	7440-41-7	TWA	2.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		CEIL	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Peak	25.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	2.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
	Remarks	Z27.29-1970		
		CEIL	5.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	0.000050 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Beryllium sensitization Chronic beryllium disease (berylliosis) Confirmed human carcinogen Danger of cutaneous absorption Sensitizer		
		C	0.000500 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		See Table Z-2		
		TWA	2.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	2.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	0.000050 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Beryllium sensitization		

		Chronic beryllium disease (berylliosis) Adopted values or notations enclosed are those for which changes are proposed in the NIC See Notice of Intended Changes (NIC) Confirmed human carcinogen Danger of cutaneous absorption Sensitizer		
		C	0.000500 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		See Table Z-2		
		TWA	2microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		C	0.0005 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: powder
Colour: grey |
| b) Odour | odourless |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 1,278 °C (2,332 °F) - lit. |
| f) Initial boiling point and boiling range | 2,970 °C (5,378 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 1.85 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Alkali metals

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intravenous - Rat - 0.496 mg/kg

Remarks: Liver:Hepatitis (hepatocellular necrosis), zonal.

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

Hamster

Lungs

Result: negative

Carcinogenicity

Carcinogenicity - Rat - Intratracheal

Tumorigenic:Neoplastic by RTECS criteria. Lungs, Thorax, or Respiration:Tumors. Lungs, Thorax, or Respiration:Bronchiogenic carcinoma.

Carcinogenicity - Rabbit - Intravenous

Tumorigenic:Equivocal tumorigenic agent by RTECS criteria. Musculoskeletal:Tumors.

Possible human carcinogen

IARC: 1 - Group 1: Carcinogenic to humans (Beryllium foil)

NTP: Known to be human carcinogen (Beryllium foil)

Known to be human carcinogenThe reference note has been added by TD based on the background information of the NTP. (Beryllium foil)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: DS1750000

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 1567 Class: 6.1 (4.1) Packing group: II
Proper shipping name: Beryllium, powder
Reportable Quantity (RQ): 10 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1567 Class: 6.1 (4.1) Packing group: II EMS-No: F-G, S-G
Proper shipping name: BERYLLIUM POWDER

IATA

UN number: 1567 Class: 6.1 (4.1) Packing group: II
Proper shipping name: Beryllium powder

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Beryllium foil	7440-41-7	1993-04-24

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

Beryllium foil	CAS-No. 7440-41-7	Revision Date 1993-04-24
----------------	----------------------	-----------------------------

Pennsylvania Right To Know Components

Beryllium foil	CAS-No. 7440-41-7	Revision Date 1993-04-24
----------------	----------------------	-----------------------------

New Jersey Right To Know Components

Beryllium foil	CAS-No. 7440-41-7	Revision Date 1993-04-24
----------------	----------------------	-----------------------------

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

Beryllium foil	CAS-No. 7440-41-7	Revision Date 2008-10-10
----------------	----------------------	-----------------------------

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H301	Toxic if swallowed.
H315	Causes skin irritation.
H317	May cause an allergic skin reaction.
H319	Causes serious eye irritation.
H330	Fatal if inhaled.
H335	May cause respiratory irritation.
H350	May cause cancer.
H372	Causes damage to organs through prolonged or repeated exposure.
Skin Irrit.	Skin irritation
Skin Sens.	Skin sensitisation

HMIS Rating

Health hazard:	4
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	4
Fire Hazard:	3
Reactivity Hazard:	3

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

MSDS SUMMARY SHEET

Manufacturer:

Name: PHILLIPS PETROLEUM COMPANY

Address 1:

Address 2:

Address 3:

CSZ: BARTLESVILLE **State:** OK **Zipcode:** 74004

Emergency phone: (800) 424-9300

Business phone: 800-762-0942

Product:

Ferndale MSDS#: 1354 **Version # :** 6

Manufacturer MSDS#: 0041

Current? : 2002

Name:

NO. 2 DIESEL FUEL

Synonyms:

CARB **Diesel** TF3

CARB **Diesel**

CARB **Diesel** 10%

Diesel Fuel Oil

EPA Low Sulfur **Diesel** Fuel

EPA Low Sulfur **Diesel** Fuel – Dyed

EPA Off Road High Sulfur **Diesel** – Dyed

Fuel Oil No. 2 – CAS # 68476-30-2

No. 2 **Diesel** Fuel Oil

No. 2 Fuel Oil – Non Hiway – Dyed

No. 2 High Sulfur **Diesel** – Dyed

No. 2 Low Sulfur **Diesel** - Dyed

No. 2 Low Sulfur **Diesel** - Undyed

Crude column 3rd IR

Crude column 3rd side cut

Atmospheric tower 3rd side cut

Ultra Low Sulfur **Diesel** No. 2

Finished **Diesel**

DHT Reactor Feed

Straight Run **Diesel**

Diesel

Middle Distillate

Product/Catalog Numbers:

MSDS Date: 01/01/2002 (**received:** 01/14/2002)

NFPA codes:

Health: 0 **Flammability:** 2 **Reactivity:** 0

**MATERIAL SAFETY DATA SHEET
No. 2 Diesel Fuel**

1. PRODUCT AND COMPANY IDENTIFICATION

Product Name: No. 2 Diesel Fuel
Product Code: Multiple
SAP Code:
Synonyms: 1354
CARB Diesel TF3
CARB Diesel
CARB Diesel 10%
Diesel Fuel Oil
EPA Low Sulfur Diesel Fuel
EPA Low Sulfur Diesel Fuel – Dyed
EPA Off Road High Sulfur Diesel – Dyed
Fuel Oil No. 2 – CAS # 68476-30-2
No. 2 Diesel Fuel Oil
No. 2 Fuel Oil – Non Hiway – Dyed
No. 2 High Sulfur Diesel – Dyed
No. 2 Low Sulfur Diesel - Dyed
No. 2 Low Sulfur Diesel – Undyed
No. 2 Ultra Low Sulfur Diesel – Dyed
No. 2 Ultra Low Sulfur Diesel - Undyed
Intended Use:
Chemical Family:
Responsible Party: Phillip’s Petroleum Company
Bartlesville, Oklahoma 74004

For Additional MSDSs: 800-762-0942

Technical Information:

The intended use of this product is indicated above. If any additional use is known, please contact us at the Technical Information number listed.

EMERGENCY OVERVIEW

24 Hour Emergency Telephone Numbers:

Spill, Leak, Fire or Accident California Poison Control System: 800-356-3120
Call CHEMTREC
North America: (800) 424-9300
Others: (703) 527-3887 (collect)

Health Hazards/Precautionary Measures: Causes severe skin irritation. Aspiration hazard if swallowed. Can enter lungs and cause damage. Use with adequate ventilation. Avoid contact with eyes, skin and clothing. Do not taste or swallow. Wash thoroughly after handling.

Physical Hazards/Precautionary Measures: Flammable liquid and vapor. Keep away from heat, sparks, flames, static electricity or other sources of ignition.

Appearance: Straw-colored to dyed red
Physical Form: Liquid
Odor: Characteristic petroleum

HFPA Hazard Class:

Health: 0 (Least)
 Flammability: 2 (Moderate)
 Reactivity: 0 (Least)

HMIS Hazard Class

Not Evaluated

2. COMPOSITION/INFORMATION ON INGREDIENTS

<u>HAZARDOUS COMPONENTS</u>	<u>% VOLUME</u>	<u>Limits</u>	<u>EXPOSURE GUIDELINE</u>	
			<u>Agency</u>	<u>Type</u>
Diesel Fuel No. 2 CAS# 68476-34-6	100	100* mg/m3	ACGIH	TWA-SKIN
Naphthalene CAS# 91-20-3	<1	10ppm	ACGIH	TWA
		15ppm	ACGIH	STEL
		10ppm	OSHA	TWA
		250ppm	NIOSH	IDLH

All components are listed on the TSCA inventory

Tosco Low Sulfur No. 2 Diesel meets the specifications of 40 CFR 60.41 for low sulfur diesel fuel.

Note: State, local or other agencies or advisory groups may have established more stringent limits. Consult an industrial hygienist or similar professional, or your local agencies, for further information.

*Proposed ACGIH (1999)

3. HAZARDS IDENTIFICATION

Potential Health Effects:

Eye: Contact may cause mild eye irritation including stinging, watering, and redness.

Skin: Severe skin irritant. Contact may cause redness, itching, burning, and severe skin damage. Prolonged or repeated contact can worsen irritation by causing drying and cracking of the skin, leading to dermatitis (inflammation). Not actually toxic by skin absorption, but prolonged or repeated skin contact may be harmful (see Section 11).

Inhalation (Breathing): No information available. Studies by other exposure routes suggest a low degree of toxicity by inhalation.

Ingestion (Swallowing): Low degree of toxicity by ingestion. ASPIRATION HAZARD – This material can enter lungs during swallowing or vomiting and cause lung inflammation and damage.

Signs and Symptoms: Effects of overexposure may include irritation of the nose and throat, irritation of the digestive tract, nausea, diarrhea and transient excitation followed by signs of nervous system depression (e.g., headache, drowsiness, dizziness, loss of coordination, disorientation and fatigue).

Cancer: Possible skin cancer hazard (see Sections 11 and 14).

Target Organs: There is limited evidence from animal studies that overexposure may cause injury to the kidney (see Section 11).

Developmental: Inadequate data available for this material.

Pre-Existing Medical Conditions: Conditions aggravated by exposure may include skin disorders and kidney disorders.

4. FIRST AID MEASURES

Eye: If irritation or redness develops, move victim away from exposure and into fresh air. Flush eyes with clean water. If symptoms persist, seek medical attention.

Skin: Immediately remove contaminated shoes, clothing, and constrictive jewelry and flush affected area(s) with large amounts of water. If skin surface is damaged, apply a clean dressing and seek immediate medical attention. If skin surface is not damaged, cleanse affected area(s) thoroughly by washing with mild soap and water. If irritation or redness develops, seek immediate medical attention.

Inhalation (Breathing): If respiratory symptoms develop, move victim away from source of exposure and into fresh air. If symptoms persist, seek medical attention. If victim is not breathing, clear airway and immediately begin artificial respiration. If breathing difficulties develop, oxygen should be administered by qualified personnel. Seek immediate medical attention.

Ingestion (Swallowing): Aspiration hazard; Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. If victim is drowsy or unconscious and vomiting, place on the left side with the head down. If possible, do not leave victim unattended and observe closely for adequacy of breathing. Seek medical attention.

5. FIRE FIGHTING MEASURES

Flammable Properties:

Flash Point: >125°F/>52°
OSHA Flammability Class: Combustible liquid
LEL %: 0.3 / UEL %; 10.0
Autoignition Temperature: 500°F/260°C

Unusual Fire & Explosion Hazards: This material is flammable and can be ignited by heat, sparks, flames, or other sources of ignition (e.g., static electricity, pilot lights, or mechanical/electrical equipment, and electronic devices such as cell phones, computers, calculators, and pagers which have not been certified as intrinsically safe). Vapors may travel considerable distances to a source of ignition where they can ignite, flash back, or explode. May create vapor/air explosion hazard indoors, in confined spaces, outdoors, or in sewers. Vapors are heavier than air and can accumulate in low areas. If container is not properly cooled, it can rupture in the heat of a fire.

Extinguishing Media: Dry chemical, carbon dioxide, or foam is recommended. Water spray is recommended to cool or protect exposed materials or structures. Carbon dioxide can displace oxygen. Use caution when applying carbon dioxide in confined spaces. Water may be ineffective for extinguishment, unless used under favorable conditions by experienced fire fighters.

Fire Fighting Instructions: For fires beyond the incipient stage, emergency responders in the immediate hazard area should wear bunker gear. When the potential chemical hazard is unknown, in enclosed or confined spaces, or when explicitly required by DOT, a self contained breathing apparatus should be worn. In addition, wear other appropriate protective equipment as conditions warrant (see Section 8).

Isolate immediate hazard area, keep unauthorized personnel out. Stop spill/release if it can be done with minimal risk. Move undamaged containers from immediate hazard area if it can be done with minimal risk.

Water spray may be useful in minimizing or dispersing vapors and to protect personnel. Cool equipment exposed to fire with water, if it can be done with minimal risk. Avoid spreading burning liquid with water used for cooling purposes.

6. ACCIDENTAL RELEASE MEASURES

Flammable. Keep all sources of ignition and hot metal surfaces away from spill/release. The use of explosion-proof equipment is recommended.

Stay upwind and away from spill/release. Notify persons down wind of the spill/release, isolate immediate hazard area and keep unauthorized personnel out. Stop spill/release if it can be done with minimal risk. Wear appropriate protective equipment including respiratory protection as conditions warrant (see Section 8).

Prevent spilled material from entering sewers, storm drains, other unauthorized drainage systems, and natural waterways. Dike far ahead of spill for later recovery or disposal. Use foam on spills to minimize vapors (see Section 5). Spilled material may be absorbed into an appropriate material.

Notify fire authorities and appropriate federal, state, and local agencies. Immediate cleanup of any spill is recommended. If spill of any amount is made into or upon navigable waters, the contiguous zone, or adjoining shorelines, notify the National Response Center (phone number 800-424-8802).

7. HANDLING AND STORAGE

Handling: Open container slowly to relieve any pressure. Bond and ground all equipment when transferring from one vessel to another. Can accumulate static charge by flow or agitation. Can be ignited by static discharged. The use of explosion-proof equipment is recommended and may be required (see appropriate fire codes). Refer to NFPA-704 and/or API RP 2003 for specific bonding/grounding requirements.

Do not enter confined spaces such as tanks or pits without following proper entry procedures such as ASTM D-4276 and 29CFR 1910.146. The use of appropriate respiratory protection is advised when concentrations exceed any established exposure limits (see Sections 2 and 8).

Do not wear contaminated clothing or shoes. Keep contaminated clothing away from sources of ignition such as sparks or open flames. Use good personal hygiene practices.

High pressure injection of hydrocarbon fuels, hydraulic oils or greases under the skin may have serious consequences even though no symptoms or injury may be apparent. This can happen accidentally when using high pressure equipment such as high pressure grease guns, fuel injection apparatus or from pinhole leaks in tubing or high pressure hydraulic oil equipment.

“Empty” containers retain residue and may be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, or other sources of ignition. They may explode and cause injury or death. “Empty” drums should be completely drained, properly bunged, and promptly shipped to the supplier or a drum reconditioner. All containers should be disposed of in an environmentally safe manner and in accordance with governmental regulations.

Before working on or in tanks which contain or have contained this material, refer to OSHA regulations, ANSIZ49.1 and other references pertaining to cleaning, repairing, welding, or other contemplated operations.

Storage: Keep container(s) tightly closed. Use and store this material in cool, dry, well-ventilated areas away from heat, direct sunlight, hot metal surfaces, and all sources of ignition. Post area “No Smoking or Open Flame.” Store only in approved containers. Keep away from incompatible material (see Section 10). Protect container(s) against physical damage. Outdoor or detached storage is preferred. Indoor storage should meet OSHA standards and appropriate fire codes.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Engineering controls: If current ventilation practices are not adequate to maintain airborne concentration below the established exposure limits (see Section 2), additional ventilation or exhaust systems may be required. Where explosive mixtures may be present, electrical systems safe for such locations must be used (see appropriate electrical codes).

Personal Protective Equipment (PPE):

Respiratory: A NIOSH certified air purifying respirator with an organic vapor cartridge may be used under conditions where airborne concentrations are expected to exceed exposure limits (see Section 2).

Protection provided by air purifying respirators is limited (see manufacturer's respirator selection guide). Use a positive pressure air supplied respirator if there is a potential for an uncontrolled release, exposure levels are not known, or any other circumstances where air purifying respirators may not provide adequate protection.

A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrants a respirator's use.

Skin: The use of gloves impervious to the specific material handled is advised to prevent skin contact, possible irritation and skin damage (see glove manufacturer literature for information on permeability). Depending on conditions of use, apron and/or arm covers may be necessary.

Eyes/Face: Approved eye protection to safeguard against potential eye contact, irritation, or injury is recommended. Depending on conditions of use, a face shield may be necessary.

Other Protective Equipment: Eye wash and quick-drench shower facilities should be available in the work area. Thoroughly clean shoes and wash contaminated clothing before reuse. It is recommended that impervious clothing be worn when skin contact is possible.

9. PHYSICAL AND CHEMICAL PROPERTIES

Note: Unless otherwise stated, values are determined at 20°C (68°F) and 760 mm Hg (1atm).

Appearance: Straw-colored to dyed red

Physical State: Liquid

Odor: Characteristic petroleum

pH: unavailable

Vapor Pressure (mm Hg): 0.40

Vapor Density (air=1): >3

Boiling Point/Range: 320-700°F /160-371°C

Freezing/Melting Point: No Data

Solubility in Water: Negligible

Specific Gravity: 0.81-0.88 @ 60°F

Percent Volatile: Negligible

Evaporation Rate (nBuAc=1): <1

Viscosity: 32.6-40.0 SUS @ 100°F

Bulk Density: 7.08 lbs/gal

Flash Point: >125°F / >52°C

Flammable/Explosive Limits (%): LEL: 0.3 / UEL: 10.0

10. STABILITY AND REACTIVITY

Stability: Stable under normal ambient and anticipated storage and handling conditions of temperature and pressure. Flammable liquid and vapor. Vapor can cause flash fire.

Conditions To Avoid: Avoid all possible sources of ignition (see Sections 5 and 7).

Materials to Avoid (Incompatible Materials): Avoid contact with strong oxidants such as liquid chlorine, concentrated oxygen, sodium hypochlorite, calcium hypochlorite, etc.

Hazardous Decomposition Products: The use of hydrocarbon fuels in an area without adequate ventilation may result in hazardous levels of combustion products (e.g., oxides of carbon, sulfur and nitrogen, benzene and other hydrocarbons) and/or dangerously low oxygen levels. ACGIH has included a TLV of 0.05 mg/m³ TWA for diesel exhaust particulate on its 1999 Notice of Intended Changes. See Section 11 for additional information on hazards of engine exhaust.

Hazardous Polymerization: Will not occur.

11. TOXICOLOGICAL INFORMATION

Diesel Fuel No. 2 (CAS# 68476-34-6)

Carcinogenicity: Chronic dermal application of certain middle distillate streams contained in diesel fuel No. 2 resulted in an increased incidence of skin tumors in mice. This material has not been identified as carcinogen by NTP, IARC, or OSHA. Diesel exhaust is a probable cancer hazard based on tests with laboratory animals.

Target Organ(s): Limited evidence of renal impairment has been noted from a few case reports involving excessive exposure to diesel fuel No. 2.

Naphthalene (CAS# 91-20-3)

Carcinogenicity: Naphthalene has been evaluated in two year inhalation studies in both rats and mice. The National Toxicology Program (NTP) concluded that there is clear evidence of carcinogenicity in male and female rats based on increased incidences of respiratory epithelial adenomas and olfactory epithelial neuroblastomas of the nose. NTP found some evidence of carcinogenicity in female mice (alveolar adenomas) and no evidence of carcinogenicity in male mice. Naphthalene has not been identified as a carcinogen by IARC or OSHA.

12. ECOLOGICAL INFORMATION

Not evaluated at this time

13. DISPOSAL CONSIDERATIONS

This material, if discarded as produced, would be a RCRA “characteristic” hazardous waste due to the characteristic(s) of ignitability (D001) and benzene (D018). If the material is spilled to soil or water, characteristic testing of the contaminated materials is recommended. Further, this material, once it becomes a waste, is subject to the land disposal restrictions in 40 CFR 268.40 and may require treatment prior to disposal to meet specific standards. Consult state and local regulations to determine whether they are more stringent than the federal requirements.

Container contents should be completely used and containers should be emptied prior to discard. Container ?insate? could be considered a RCRA hazardous waste and must be disposed of with care and in compliance with federal, state and local regulations. Large empty containers, such as drums, should be returned to the distributor or to a drum reconditioner. To assure proper disposal of smaller containers, consult with state and local regulations and disposal authorities.

14. TRANSPORT INFORMATION

DOT Shipping Description: Diesel Fuel, NA1983
Non-Bulk Package Marking: Diesel Fuel, 3, NA 1993, III

15. REGULATORY INFORMATION

EPA SARA 311/312 (Title III Hazard Categories):

Acute Health:	Yes
Chronic Health:	Yes
Fire Hazard:	Yes
Pressure Hazard:	No
Reactive Hazard:	No

SARA 313 and 40 CFR 372:

This material contains the following chemicals subject to the reporting requirements of SARA 313 and 40 CFR 372:

Component	CAS Number	Weight %
-- None known --		

California Proposition 65:

Warning: This material contains the following chemicals which are known to the state of California to cause cancer, birth defects or other reproductive harm, and are subject to the requirements of California Proposition 65 (CA Health & Safety Code Section 25249.5):

Component	Effect
Benzene	Cancer, Developmental and Reproductive Toxicant
Toluene	Developmental Toxicant

Diesel engine exhaust, while not a component of this material, is on the Proposition 65 list of chemicals known to the State of California to cause cancer.

Carcinogen Identification:

This material has not been identified as a carcinogen by NTP, IARC, or OSHA. See Section 11 for carcinogenicity information of individual components, if any. Diesel exhaust is a probable cancer hazard based on tests in laboratory animals. It has been identified as carcinogen by IARC.

EPA (CERCLA Reportable Quantity): None

16. OTHER INFORMATION

Issue Date: 01/01/02
Previous Issue Date: 05/15/01
Product Code: Multiple
Revised Sections: None
Previous Product Code: Multiple
MSDS Number: 0041

Disclaimer of Expressed and Implied Warranties:

The information presented in this Material Data Safety Sheet is based on data believed to be accurate as of the date this Material Data Sheet was prepared. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY OTHER WARRANTY IS EXPRESSED OR IS TO BE IMPLIED REGARDING THE ACCURACY OR COMPLETENESS OF THE INFORMATION PROVIDED ABOVE, THE RESULTS TO BE OBTAINED FROM THE USE OF THIS INFORMATION OR THE PRODUCT, THE SAFETY OF THE PRODUCT, OR THE HAZARDS RELATED TO ITS USE. No responsibility is assumed for any damage or injury resulting from abnormal use or from any failure to adhere to recommended practices. The information provided above, and the product, are furnished on the condition that the person receiving them shall make their own determination as to the suitability of the product for their particular purpose and on the condition that they assume the risk of their use. In addition, no authorization is given nor implied to practice any patented invention without a license.

Tosco Refining Company

Ferndale Refinery

UltraLow Sulfur Diesel Product Specification

Ferndale Product Code:34380xx (5) Product Code: ULSD2

(COMETS)

Specification	Unit	Limit	Test Procedure	Typical
Appearance Water & Sediment Color Haze Rating	Vol % Number Rating	0.05 Max 3.0 Max 2 Max	D 2709 D 1500 D 4176	
Composition Carbon Residue (Ramsbottom)	Wt %	0.35 Max	D 524, D 189	
Volatility 90% Recovered Flash Point Gravity	Deg; F Deg; F Deg; F API	540 Min 640 Min 125 Min (1) 30 Min	D 86 D 86 D 93 D 287, D4052	130 F
Fluidity Pour Point Cloud Point Viscosity @ 104F Lubricity, SLBOCLE Lubricity, HFRR	Deg; F Deg; F cSt cSt grams mm	See Season Table (6) See Season Table (6) 1.9 Min 4.1 Max 3100 Min .45	D 97 D 2500 D 445 D 445 D 6078 D 6079	10 F 3300gm
Combustion Cetane Index or Cetane Number (3,4)	Number	40.0 Min	D 976, D613	47.0
Corrosion Copper Strip, 3hr @ 50 deg C	Number	3 Max (2)	D 130	
Aromatics (4)	Vol %	35 Max	D 1319	25 %
Contaminants Total Sulfur Water & Sediment Ash	PPM Vol % Wt %	30 Max 0.05 Max 0.01 Max	D 2622, D4294 D 1796 D 482	15-20ppm
Additives Cetane Improver Dye	Lb/MBbl	675 Max Undyed		

1. Minimum release specification is 125 deg. F. The refinery should target 135 deg. F.
2. Test result reported as a number and letter (e.g. 1a). Any letter is allowable as long as the number meets the spec shown.
3. Either specification must be met.
4. Either cetane index minimum or aromatics maximum must be met.
5. Winter cloud and pour specifications may be relaxed to the summer specifications by agreement with the customer.
6. Season Table

Month	Product Code	Pour Point	Cloud Point
Jan, Feb, Nov, Dec	WI	0 max (5)	14 max (5)
Mar - Oct	SU	15 max	24 max



Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088
EU/CLP GHS

Synonyms: #2 Heating Oil; 2 Oil; Off-road Diesel Fuel

*** Section 1 - Product and Company Identification ***

Manufacturer Information

Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

Phone: 732-750-6000 Corporate EHS
Emergency # 800-424-9300 CHEMTREC
www.hess.com (Environment, Health, Safety Internet Website)

*** Section 2 - Hazards Identification ***

GHS Classification:

Flammable Liquids - Category 3
Acute Toxicity, Inhalation - Category 4
Skin Corrosion/Irritation – Category 2
Eye Damage/Irritation – Category 2
Carcinogenicity - Category 2
Specific Target Organ Toxicity (Single Exposure) – Category 3 (respiratory irritation, narcosis)
Aspiration Hazard – Category 1
Hazardous to the Aquatic Environment, Acute Hazard – Category 3

GHS LABEL ELEMENTS

Symbol(s)



Signal Word

DANGER

Hazard Statements

Flammable liquid and vapor.
Harmful if inhaled.
Causes skin irritation.
Causes eye irritation.
Suspected of causing cancer.
Suspected of causing genetic defects.
May cause respiratory irritation.
May cause drowsiness or dizziness.
May be fatal if swallowed and enters airways.
Harmful to aquatic life.

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

Precautionary Statements

Prevention

Keep away from heat/sparks/open flames/hot surfaces. No smoking
Keep container tightly closed.
Ground/bond container and receiving equipment.
Use explosion-proof electrical/ventilating/lighting/equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.
Wear protective gloves/protective clothing/eye protection/face protection.
Avoid breathing fume/mist/vapors/spray.
Use only outdoors or in a well-ventilated area.
Wash hands and forearms thoroughly after handling.
Obtain special instructions before use.
Do not handle until all safety precautions have been read and understood.
Avoid release to the environment.

Response

In case of fire: Use water spray, fog or foam.
If on skin (or hair): Wash with plenty of soap and water. Take off immediately all contaminated clothing and wash it before reuse. If skin irritation occurs, get medical advice/attention.
If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center or doctor if you feel unwell.
If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.
If exposed or concerned: Get medical advice/attention.
If swallowed: Immediately call a poison center or doctor/physician if you feel unwell. Do NOT induce vomiting.

Storage

Store in a well ventilated place.
Keep cool. Keep container tightly closed.
Store locked up.

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

* * * Section 3 - Composition / Information on Ingredients * * *

CAS #	Component	Percent
68476-30-2	Fuel oil No. 2	100
91-20-3	Naphthalene	<0.1

A complex combination of hydrocarbons with carbon numbers in the range C9 and higher produced from the distillation of petroleum crude oil.

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

*** Section 4 - First Aid Measures ***

First Aid: Eyes

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

First Aid: Skin

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or with waterless hand cleanser. Obtain medical attention if irritation or redness develops.

First Aid: Ingestion

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Monitor for breathing difficulties. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

First Aid: Inhalation

Remove person to fresh air. If person is not breathing, provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

*** Section 5 - Fire Fighting Measures ***

General Fire Hazards

See Section 9 for Flammability Properties.

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

Hazardous Combustion Products

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke).

Extinguishing Media

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO₂, water spray, fire fighting foam, or gaseous extinguishing agent.

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

Unsuitable Extinguishing Media

None

Fire Fighting Equipment/Instructions

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment. Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing. Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

*** Section 6 - Accidental Release Measures ***

Recovery and Neutralization

Carefully contain and stop the source of the spill, if safe to do so.

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

Materials and Methods for Clean-Up

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal.

Emergency Measures

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact.

Personal Precautions and Protective Equipment

Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

Environmental Precautions

Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection.

Prevention of Secondary Hazards

None

* * * Section 7 - Handling and Storage * * *

Handling Procedures

Handle as a combustible liquid. Keep away from heat, sparks, excessive temperatures and open flame! No smoking or open flame in storage, use or handling areas. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when this product is loaded into tanks previously containing low flash point products (such as gasoline) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents."

Storage Procedures

Keep containers closed and clearly labeled. Use approved vented storage containers. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks."

Incompatibilities

Keep away from strong oxidizers; Fluorel ®

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

*** Section 8 - Exposure Controls / Personal Protection ***

Component Exposure Limits

Fuel oil No. 2 (270-671-4)

- ACGIH: 100 mg/m³ TWA (inhalable fraction and vapor, as total hydrocarbons, listed under Diesel fuel)
Skin - potential significant contribution to overall exposure by the cutaneous route (listed under Diesel fuel)
- Belgium: 100 mg/m³ TWA (as total hydrocarbon, aerosol and vapor)
Skin (listed under Gas oil)
- Portugal: 100 mg/m³ TWA [VLE-MP] (aerosol and vapor, as total Hydrocarbons, listed under Fuel diesel)

Naphthalene (202-049-5)

- ACGIH: 15 ppm STEL
10 ppm TWA
Skin - potential significant contribution to overall exposure by the cutaneous route
- Austria: 10 ppm TWA [TMW]; 50 mg/m³ TWA [TMW]
skin notation
- Belgium: 15 ppm STEL; 80 mg/m³ STEL
10 ppm TWA; 53 mg/m³ TWA
Skin
- Denmark: 10 ppm TWA; 50 mg/m³ TWA
- Finland: 2 ppm STEL; 10 mg/m³ STEL
1 ppm TWA; 5 mg/m³ TWA
- France: 10 ppm TWA [VME]; 50 mg/m³ TWA [VME]
- Germany: 0.1 ppm TWA AGW (The risk of damage to the embryo or fetus can be excluded when MAK and BAT values are observed, inhalable fraction, exposure factor 1); 0.5 mg/m³ TWA AGW (The risk of damage to the embryo or fetus can be excluded when MAK and BAT values are observed, inhalable fraction, exposure factor 1)
- Greece: 10 ppm TWA; 50 mg/m³ TWA
- Ireland: 15 ppm STEL; 75 mg/m³ STEL
10 ppm TWA; 50 mg/m³ TWA
- Netherlands: 80 mg/m³ STEL
50 mg/m³ TWA
- Portugal: 10 ppm TWA [VLE-MP]
- Spain: 15 ppm STEL [VLA-EC]; 80 mg/m³ STEL [VLA-EC]
10 ppm TWA [VLA-ED]; 53 mg/m³ TWA [VLA-ED]
skin - potential for cutaneous exposure
- Sweden: 10 ppm LLV; 50 mg/m³ LLV
15 ppm STV; 80 mg/m³ STV

Engineering Measures

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

Personal Protective Equipment: Respiratory

A NIOSH/MSHA-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited.

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

Personal Protective Equipment: Hands

Gloves constructed of nitrile, neoprene, or PVC are recommended.

Personal Protective Equipment: Eyes

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

Personal Protective Equipment: Skin and Body

Chemical protective clothing such as of E.I. DuPont TyChem®, Saranex® or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

*** Section 9 - Physical & Chemical Properties ***

Appearance:	Red or reddish/orange colored (dyed)	Odor:	Mild, petroleum distillate odor
Physical State:	Liquid	pH:	ND
Vapor Pressure:	0.009 psia @ 70 °F (21 °C)	Vapor Density:	>1.0
Boiling Point:	340 to 700 °F (171 to 371 °C)	Melting Point:	ND
Solubility (H2O):	Negligible	Specific Gravity:	AP 0.823-0871
Evaporation Rate:	Slow; varies with conditions	VOC:	ND
Octanol/H2O Coeff.:	ND	Flash Point:	100 °F (38 °C) minimum
Flash Point Method:	PMCC	Upper Flammability Limit (UFL):	7.5
Lower Flammability Limit (LFL):	0.6	Burning Rate:	ND
Auto Ignition:	494°F (257°C)		

*** Section 10 - Chemical Stability & Reactivity Information ***

Chemical Stability

This is a stable material.

Hazardous Reaction Potential

Will not occur.

Conditions to Avoid

Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources.

Incompatible Products

Keep away from strong oxidizers; Fluorel®

Hazardous Decomposition Products

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke).

*** Section 11 - Toxicological Information ***

Acute Toxicity

A: General Product Information

Harmful if swallowed.

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

B: Component Analysis - LD50/LC50

Fuel oil No. 2 (68476-30-2)

Oral LD50 Rat 12 g/kg; Dermal LD50 Rabbit 4720 µL/kg; Dermal LD50 Rabbit >2000 mg/kg; Inhalation LC50 Rat 4.6 mg/L 4 h

Naphthalene (91-20-3)

Inhalation LC50 Rat >340 mg/m³ 1 h; Oral LD50 Rat 490 mg/kg; Dermal LD50 Rat >2500 mg/kg; Dermal LD50 Rabbit >20 g/kg

Product Mixture

Oral LD50 Rat 14.5 ml/kg; Dermal LD50 Rabbit >5 mL/kg; Guinea Pig Sensitization: negative; Primary dermal irritation: moderately irritating (Draize mean irritation score - 3.98 rabbits); Draize eye irritation: mildly irritating (Draize score, 48 hours, unwashed - 2.0 rabbits)

Potential Health Effects: Skin Corrosion Property/Stimulativeness

Practically non-toxic if absorbed following acute (single) exposure. May cause skin irritation with prolonged or repeated contact. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are repeatedly exposed.

Potential Health Effects: Eye Critical Damage/ Stimulativeness

Contact with eyes may cause mild irritation.

Potential Health Effects: Ingestion

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.

Potential Health Effects: Inhalation

Excessive exposure may cause irritations to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

WARNING: the burning of any hydrocarbon as a fuel in an area without adequate ventilation may result in hazardous levels of combustion products, including carbon monoxide, and inadequate oxygen levels, which may cause unconsciousness, suffocation, and death.

Respiratory Organs Sensitization/Skin Sensitization

This product is not reported to have any skin sensitization effects.

Generative Cell Mutagenicity

This product is not reported to have any mutagenic effects. Material of similar composition has been positive in a mutagenicity study.

Carcinogenicity

A: General Product Information

Suspected of causing cancer.

Dermal carcinogenicity: positive - mice

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

Studies have shown that similar products produce skin tumors in laboratory animals following repeated applications without washing or removal. The significance of this finding to human exposure has not been determined. Other studies with active skin carcinogens have shown that washing the animal's skin with soap and water between applications reduced tumor formation.

This product is similar to Diesel Fuel. IARC classifies whole diesel fuel exhaust particulates as probably carcinogenic to humans (Group 2A) and NIOSH regards it as a potential cause of occupational lung cancer based on animal studies and limited evidence in humans.

B: Component Carcinogenicity

Fuel oil No. 2 (68476-30-2)

ACGIH: A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans (listed under Diesel fuel)

Naphthalene (91-20-3)

ACGIH: A4 - Not Classifiable as a Human Carcinogen

NTP: Reasonably Anticipated To Be A Human Carcinogen (Possible Select Carcinogen)

IARC: Monograph 82 [2002] (Group 2B (possibly carcinogenic to humans))

Reproductive Toxicity

This product is not reported to have any reproductive toxicity effects.

Specified Target Organ General Toxicity: Single Exposure

This product is not reported to have any specific target organ general toxicity single exposure effects.

Specified Target Organ General Toxicity: Repeated Exposure

This product is not reported to have any specific target organ general toxicity repeat exposure effects.

Aspiration Respiratory Organs Hazard

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

* * * Section 12 - Ecological Information * * *

Ecotoxicity

A: General Product Information

Very toxic to aquatic life with long lasting effects. Keep out of sewers, drainage areas and waterways. Report spills and releases, as applicable, under Federal and State regulations.

B: Component Analysis - Ecotoxicity - Aquatic Toxicity

Fuel oil No. 2 (68476-30-2)

Test & Species

96 Hr LC50 Pimephales promelas

35 mg/L [flow-through]

Conditions

Naphthalene (91-20-3)

Test & Species

96 Hr LC50 Pimephales promelas

5.74-6.44 mg/L [flow-through]

Conditions

96 Hr LC50 Oncorhynchus mykiss

1.6 mg/L [flow-through]

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

96 Hr LC50 Oncorhynchus mykiss	0.91-2.82 mg/L [static]
96 Hr LC50 Pimephales promelas	1.99 mg/L [static]
96 Hr LC50 Lepomis macrochirus	31.0265 mg/L [static]
72 Hr EC50 Skeletonema costatum	0.4 mg/L
48 Hr LC50 Daphnia magna	2.16 mg/L
48 Hr EC50 Daphnia magna	1.96 mg/L [Flow through]
48 Hr EC50 Daphnia magna	1.09 - 3.4 mg/L [Static]

Persistence/Degradability

No information available.

Bioaccumulation

No information available.

Mobility in Soil

No information available.

* * * Section 13 - Disposal Considerations * * *

Waste Disposal Instructions

See Section 7 for Handling Procedures. See Section 8 for Personal Protective Equipment recommendations.

Disposal of Contaminated Containers or Packaging

Dispose of contents/container in accordance with local/regional/national/international regulations.

* * * Section 14 - Transportation Information * * *

IATA Information

Shipping Name: Heating oil, light

UN #: 1202 **Hazard Class:** 3 **Packing Group:** III

ICAO Information

Shipping Name: Heating oil, light

UN #: 1202 **Hazard Class:** 3 **Packing Group:** III

IMDG Information

Shipping Name: Heating oil, light

UN #: 1202 **Hazard Class:** 3 **Packing Group:** III

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

*** Section 15 - Regulatory Information ***

Regulatory Information

Component Analysis – Inventory

Component/CAS	EC #	EEC	CAN	TSCA
Fuel oil No. 2 68476-30-2	270-671-4	EINECS	DSL	Yes
Naphthalene 91-20-3	202-049-5	EINECS	DSL	Yes

*** Section 16 - Other Information ***

Key/Legend

ACGIH = American Conference of Governmental Industrial Hygienists; ADG = Australian Code for the Transport of Dangerous Goods by Road and Rail; ADR/RID = European Agreement of Dangerous Goods by Road/Rail; AS = Standards Australia; DFG = Deutsche Forschungsgemeinschaft; DOT = Department of Transportation; DSL = Domestic Substances List; EEC = European Economic Community; EINECS = European Inventory of Existing Commercial Chemical Substances; ELINCS = European List of Notified Chemical Substances; EU = European Union; HMIS = Hazardous Materials Identification System; IARC = International Agency for Research on Cancer; IMO = International Maritime Organization; IATA = International Air Transport Association; MAK = Maximum Concentration Value in the Workplace; NDSL = Non-Domestic Substances List; NFPA = National Fire Protection Association; NOHSC = National Occupational Health & Safety Commission; NTP = National Toxicology Program; STEL = Short-term Exposure Limit; TDG = Transportation of Dangerous Goods; TLV = Threshold Limit Value; TSCA = Toxic Substances Control Act; TWA = Time Weighted Average

Literature References


None

Other Information

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.

End of Sheet



Health	3
Fire	1
Reactivity	0
Personal Protection	E

Material Safety Data Sheet

Cadmium MSDS

Section 1: Chemical Product and Company Identification

Product Name: Cadmium

Catalog Codes: SLC3484, SLC5272, SLC2482

CAS#: 7440-43-9

RTECS: EU9800000

TSCA: TSCA 8(b) inventory: Cadmium

CI#: Not applicable.

Synonym:

Chemical Name: Cadmium

Chemical Formula: Cd

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Cadmium	7440-43-9	100

Toxicological Data on Ingredients: Cadmium: ORAL (LD50): Acute: 2330 mg/kg [Rat.]. 890 mg/kg [Mouse]. DUST (LC50): Acute: 50 ppm 4 hour(s) [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of ingestion, of inhalation. Slightly hazardous in case of skin contact (irritant, sensitizer), of eye contact (irritant). Severe over-exposure can result in death.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Classified A2 (Suspected for human.) by ACGIH, 2 (Reasonably anticipated.) by NTP.

MUTAGENIC EFFECTS: Not available. **TERATOGENIC EFFECTS:** Not available. **DEVELOPMENTAL TOXICITY:** Not available. The substance is toxic to kidneys, lungs, liver. Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to an highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section 4: First Aid Measures

Eye Contact: No known effect on eye contact, rinse with water for a few minutes.

Skin Contact:

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

Serious Skin Contact: Not available.

Inhalation: Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

Ingestion:

Do not induce vomiting. Examine the lips and mouth to ascertain whether the tissues are damaged, a possible indication that the toxic material was ingested; the absence of such signs, however, is not conclusive. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: May be combustible at high temperature.

Auto-Ignition Temperature: 570°C (1058°F)

Flash Points: Not available.

Flammable Limits: Not available.

Products of Combustion: Some metallic oxides.

Fire Hazards in Presence of Various Substances:

Non-flammable in presence of open flames and sparks, of heat, of oxidizing materials, of reducing materials, of combustible materials, of moisture.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

Special Remarks on Fire Hazards:

Material in powder form, capable of creating a dust explosion. When heated to decomposition it emits toxic fumes.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill: Use appropriate tools to put the spilled solid in a convenient waste disposal container.

Large Spill:

Use a shovel to put the material into a convenient waste disposal container. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep locked up Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk, evaporate the residue under a fume hood. Ground all equipment containing material. Do not ingest. Do not breathe dust. Wear suitable protective clothing In case of insufficient ventilation, wear suitable respiratory equipment If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents.

Storage:

Keep container dry. Keep in a cool place. Ground all equipment containing material. Keep container tightly closed. Keep in a cool, well-ventilated place. Highly toxic or infectious materials should be stored in a separate locked safety storage cabinet or room.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection: Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 0.01 (ppm) Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid. (Lustrous solid.)

Odor: Not available.

Taste: Not available.

Molecular Weight: 112.4 g/mole

Color: Silvery.

pH (1% soln/water): Not applicable.

Boiling Point: 765°C (1409°F)

Melting Point: 320.9°C (609.6°F)

Critical Temperature: Not available.

Specific Gravity: 8.64 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: Not available.

Volatility: Not available.

Odor Threshold: Not available.

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: Not available.

Solubility: Insoluble in cold water, hot water, methanol, diethyl ether, n-octanol.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances: Reactive with oxidizing agents.

Corrosivity: Not considered to be corrosive for metals and glass.

Special Remarks on Reactivity: Reacts violently with potassium.

Special Remarks on Corrosivity: Not available.

Polymerization: No.

Section 11: Toxicological Information

Routes of Entry: Inhalation. Ingestion.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 890 mg/kg [Mouse]. Acute toxicity of the dust (LC50): 229.9 mg/m³ 4 hour(s) [Rat].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: Classified A2 (Suspected for human.) by ACGIH, 2 (Reasonably anticipated.) by NTP. The substance is toxic to kidneys, lungs, liver.

Other Toxic Effects on Humans:

Hazardous in case of ingestion, of inhalation. Slightly hazardous in case of skin contact (irritant, sensitizer).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: An allergen. 0047 Animal: embryotoxic, passes through the placental barrier.

Special Remarks on other Toxic Effects on Humans: May cause allergic reactions, exzema and/or dehydration of the skin.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are as toxic as the original product.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification:

Identification:

Special Provisions for Transport:

Section 15: Other Regulatory Information

Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Cadmium California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Cadmium Pennsylvania RTK: Cadmium Massachusetts RTK: Cadmium TSCA 8(b) inventory: Cadmium SARA 313 toxic chemical notification and release reporting: Cadmium CERCLA: Hazardous substances.: Cadmium

Other Regulations: OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

Other Classifications:

WHMIS (Canada):

CLASS D-1A: Material causing immediate and serious toxic effects (VERY TOXIC). CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

DSCL (EEC):

R26- Very toxic by inhalation. R45- May cause cancer.

HMIS (U.S.A.):

Health Hazard: 3

Fire Hazard: 1

Reactivity: 0

Personal Protection: E

National Fire Protection Association (U.S.A.):

Health: 3

Flammability: 1

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

Section 16: Other Information

References:


-Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987. -Liste des produits purs tératogènes, mutagènes, cancérogènes. Répertoire toxicologique de la Commission de la Santé et de la Sécurité du Travail du Québec. -Material safety data sheet emitted by: la Commission de la Santé et de la Sécurité du Travail du Québec. -SAX, N.I. Dangerous Properties of Industrial Materials. Toronto, Van Nostrand Reinold, 6e ed. 1984. -The Sigma-Aldrich Library of Chemical Safety Data, Edition II. -Guide de la loi et du règlement sur le transport des marchandises dangereuses au Canada. Centre de conformité international Ltée. 1986.

Other Special Considerations: Not available.

Created: 10/09/2005 04:29 PM

Last Updated: 11/01/2010 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.



Health	3
Fire	3
Reactivity	2
Personal Protection	J

Material Safety Data Sheet Calcium MSDS

Section 1: Chemical Product and Company Identification

Product Name: Calcium

Catalog Codes: SLC2782

CAS#: 7440-70-2

RTECS: EV8040000

TSCA: TSCA 8(b) inventory: Calcium

CI#: Not available.

Synonym:

Chemical Formula: Ca

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Calcium	7440-70-2	100

Toxicological Data on Ingredients: Calcium LD50: Not available. LC50: Not available.

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Corrosive to eyes and skin. The amount of tissue damage depends on length of contact. Eye contact can result in corneal damage or blindness. Skin contact can produce inflammation and blistering. Inhalation of dust will produce irritation to gastro-intestinal or respiratory tract, characterized by burning, sneezing and coughing. Severe over-exposure can produce lung damage, choking, unconsciousness or death.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance is toxic to lungs, mucous membranes. Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure of the eyes to a low level of dust can produce eye irritation. Repeated skin exposure can produce local skin destruction, or dermatitis. Repeated inhalation of dust can produce varying degree of respiratory irritation or lung damage.

Section 4: First Aid Measures

Eye Contact: Check for and remove any contact lenses. Do not use an eye ointment. Seek medical attention.

Skin Contact:

If the chemical got onto the clothed portion of the body, remove the contaminated clothes as quickly as possible, protecting your own hands and body. Place the victim under a deluge shower. If the chemical got on the victim's exposed skin, such as the hands : Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

Inhalation: Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

Ingestion:

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: Not available.

Flash Points: Not available.

Flammable Limits: Not available.

Products of Combustion: Some metallic oxides.

Fire Hazards in Presence of Various Substances: Not available.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

Flammable solid. **SMALL FIRE:** Use DRY chemical powder. **LARGE FIRE:** Use water spray or fog.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill: Use appropriate tools to put the spilled solid in a convenient waste disposal container.

Large Spill:

Corrosive solid. Flammable solid that, in contact with water, emits flammable gases. Stop leak if without risk. Do not get water inside container. Do not touch spilled material. Cover with dry earth, sand or other non-combustible material. Use water spray to reduce vapors. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal.

Section 7: Handling and Storage

Precautions:

Keep under inert atmosphere. Keep container dry. Do not breathe dust. Never add water to this product. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If you feel unwell, seek medical attention and show the label when possible. Avoid contact with skin and eyes. Keep away from incompatibles such as acids, moisture.

Storage:

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. Keep container dry. Keep in a cool place.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection:

Splash goggles. Lab coat. Vapor and dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor and dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits: Not available.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid.

Odor: Not available.

Taste: Not available.

Molecular Weight: 40.08 g/mole

Color: Not available.

pH (1% soln/water): Not available.

Boiling Point: 1484°C (2703.2°F)

Melting Point: 839°C (1542.2°F)

Critical Temperature: Not available.

Specific Gravity: 1.54 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: Not available.

Volatility: Not available.

Odor Threshold: Not available.

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: Not available.

Solubility: Not available.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances:

Highly reactive with acids. Reactive with moisture. The product reacts violently with water to emit flammable but non toxic gases.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: Not available.

Polymerization: No.

Section 11: Toxicological Information

Routes of Entry: Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

LD50: Not available. LC50: Not available.

Chronic Effects on Humans: The substance is toxic to lungs, mucous membranes.

Other Toxic Effects on Humans: Hazardous in case of skin contact (irritant), of ingestion, of inhalation.

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: Not available.

Special Remarks on other Toxic Effects on Humans: Not available.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are less toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification: CLASS 4.3: Material that emits flammable gases on contact with water.

Identification: : Calcium : UN1401 PG: II

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

Pennsylvania RTK: Calcium Massachusetts RTK: Calcium TSCA 8(b) inventory: Calcium

Other Regulations: OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

Other Classifications:

WHMIS (Canada):

CLASS B-6: Reactive and very flammable material. CLASS E: Corrosive solid.

DSCL (EEC): R36/38- Irritating to eyes and skin.

HMIS (U.S.A.):

Health Hazard: 3

Fire Hazard: 3

Reactivity: 2

Personal Protection: j

National Fire Protection Association (U.S.A.):

Health: 3

Flammability: 3

Reactivity: 2

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor and dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information


References: Not available.

Other Special Considerations: Not available.

Created: 10/11/2005 11:30 AM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.



Health	2
Fire	1
Reactivity	0
Personal Protection	E

Material Safety Data Sheet Chromium MSDS

Section 1: Chemical Product and Company Identification

Product Name: Chromium

Catalog Codes: SLC4711, SLC3709

CAS#: 7440-47-3

RTECS: GB4200000

TSCA: TSCA 8(b) inventory: Chromium

CI#: Not applicable.

Synonym: Chromium metal; Chrome; Chromium Metal Chips 2" and finer

Chemical Name: Chromium

Chemical Formula: Cr

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Chromium	7440-47-3	100

Toxicological Data on Ingredients: Chromium LD50: Not available. LC50: Not available.

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of eye contact (irritant), of inhalation. Slightly hazardous in case of ingestion.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH, 3 (Not classifiable for human.) by IARC.

MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to kidneys, lungs, liver, upper respiratory tract. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention.

Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

Serious Inhalation: Not available.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: May be combustible at high temperature.

Auto-Ignition Temperature: 580°C (1076°F)

Flash Points: Not available.

Flammable Limits: Not available.

Products of Combustion: Some metallic oxides.

Fire Hazards in Presence of Various Substances:

Slightly flammable to flammable in presence of open flames and sparks, of heat. Non-flammable in presence of shocks.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

Special Remarks on Fire Hazards:

Moderate fire hazard when it is in the form of a dust (powder) and burns rapidly when heated in flame. Chromium is attacked vigorously by fused potassium chlorate producing vivid incandescence. Pyrophoric chromium unites with nitric oxide with incandescence. Incandescent reaction with nitrogen oxide or sulfur dioxide.

Special Remarks on Explosion Hazards:

Powdered Chromium metal +fused ammonium nitrate may react violently or explosively. Powdered Chromium will explode spontaneously in air.

Section 6: Accidental Release Measures

Small Spill:

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

Large Spill:

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe dust. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, acids, alkalis.

Storage: Keep container tightly closed. Keep container in a cool, well-ventilated area.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection:

Splash goggles. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 0.5 (mg/m³) from ACGIH (TLV) [United States] TWA: 1 (mg/m³) from OSHA (PEL) [United States] TWA: 0.5 (mg/m³) from NIOSH [United States] TWA: 0.5 (mg/m³) [United Kingdom (UK)] TWA: 0.5 (mg/m³) [Canada] Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid. (Metal solid.)

Odor: Odorless.

Taste: Not available.

Molecular Weight: 52 g/mole

Color: Silver-white to Grey.

pH (1% soln/water): Not applicable.

Boiling Point: 2642°C (4787.6°F)

Melting Point: 1900°C (3452°F) +/- !0 deg. C

Critical Temperature: Not available.

Specific Gravity: 7.14 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: Not available.

Volatility: Not available.

Odor Threshold: Not available.

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: Not available.

Solubility:

Insoluble in cold water, hot water. Soluble in acids (except Nitric), and strong alkalies.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Excess heat, incompatible materials

Incompatibility with various substances: Reactive with oxidizing agents, acids, alkalis.

Corrosivity: Not available.

Special Remarks on Reactivity:

Incompatible with molten Lithium at 180 deg. C, hydrogen peroxide, hydrochloric acid, sulfuric acid, most caustic alkalies and alkali carbonates, potassium chlorate, sulfur dioxide, nitrogen oxide, bromine pentafluoride. It may react violently or ignite with bromine pentafluoride. Chromium is rapidly attacked by fused sodium hydroxide + potassium nitrate. Potentially hazardous incompatibility with strong oxidizers.

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Inhalation. Ingestion.

Toxicity to Animals:

LD50: Not available. LC50: Not available.

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH, 3 (Not classifiable for human.) by IARC. May cause damage to the following organs: kidneys, lungs, liver, upper respiratory tract.

Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant), of inhalation. Slightly hazardous in case of ingestion.

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans:

May cause cancer based on animal data. There is no evidence that exposure to trivalent chromium causes cancer in man.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: May cause skin irritation. Eyes: May cause mechanical eye irritation. Inhalation: May cause irritation of the respiratory tract and mucous membranes of the respiratory tract. Ingestion: May cause gastrointestinal tract irritation with nausea, vomiting, diarrhea. Chronic Potential Health Effects: Inhalation: The effects of chronic exposure include irritation, sneezing, redness of the throat, bronchospasm, asthma, cough, polyps, chronic inflammation, emphysema, chronic bronchitis, pharyngitis, bronchopneumonia, pneumoconiosis. Effects on the nose from chronic chromium exposure include irritation, ulceration, and perforation of the nasal septum. Inflammation and ulceration of the larynx may also occur. Ingestion or Inhalation: Chronic exposure may cause liver and kidney damage.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The product itself and its products of degradation are not toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: Not a DOT controlled material (United States).

Identification: Not applicable.

Special Provisions for Transport: Not applicable.

Section 15: Other Regulatory Information**Federal and State Regulations:**

Connecticut hazardous material survey.: Chromium Illinois toxic substances disclosure to employee act: Chromium Illinois chemical safety act: Chromium New York release reporting list: Chromium Rhode Island RTK hazardous substances: Chromium Pennsylvania RTK: Chromium Minnesota: Chromium Michigan critical material: Chromium Massachusetts RTK: Chromium Massachusetts spill list: Chromium New Jersey: Chromium New Jersey spill list: Chromium Louisiana spill reporting: Chromium California Director's List of Hazardous Substances: Chromium TSCA 8(b) inventory: Chromium SARA 313 toxic chemical notification and release reporting: Chromium CERCLA: Hazardous substances.: Chromium: 5000 lbs. (2268 kg)

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada): Not controlled under WHMIS (Canada).

DSCL (EEC):

R40- Limited evidence of carcinogenic effect S36/37/39- Wear suitable protective clothing, gloves and eye/face protection. S45- In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 1

Reactivity: 0

Personal Protection: E

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 1

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/10/2005 08:16 PM

Last Updated: 11/06/2008 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.



Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

*** Section 1 - Chemical Product and Company Identification ***

Chemical Formula: Cobalt (Co), chromium (Cr) and other alloying elements

Product Use: Cast aerospace parts

Other Designations: 694, 98M2, CoCrNiMoFe, ECY 768, F75, FSX 414, G34, How 1, How 3, How 6, How 12, How 19, How 21, How 25 (L605), How 31 (X40), How 36, How F, How J, Mar-M 302, Mar-M 509, Mar-M 918, Merle 72, MP35N, S 816, PT1377, PT1508, WI 52, X 45 and other Cobalt-Based Alloys

Alcoa Inc.
201 Isabella Street
Pittsburgh, PA 15212-5858

Phone: Health and Safety: 1-412-553-4649

Emergency Information: USA: Chemtrec: 1-800-424-9300 or 1-703-527-3887

Alcoa: 1-412-553-4001

Website: For a current MSDS, refer to Alcoa websites: www.alcoa.com or Internally at my.alcoa.com EHS Community

*** Section 2 - Hazards Identification ***

EMERGENCY OVERVIEW

Solid. Metallic appearance. Odorless. Non-combustible as supplied.

Explosion/fire hazards may be present when (See Sections 5, 7 and 10 for additional information):

* Molten metal is in contact with water/moisture.

* Heavily concentrated dust clouds are dispersed in the air.

Dust and fume from processing can cause irritation of eyes, skin and upper respiratory tract.

POTENTIAL HEALTH EFFECTS

The following statements summarize the health effects generally expected in cases of overexposures. User specific situations should be assessed by a qualified individual. Additional health information can be found in Section 11.

The health effects listed below are not likely to occur unless processing or recycling/combustion generate dusts or fumes.

Eyes Dust or fume from processing: Can cause irritation.

Skin Dust or fume from processing: Can cause irritation, sensitization and allergic contact dermatitis.

Inhalation Health effects from mechanical processing (e.g., cutting, grinding): Can cause upper respiratory tract irritation. **Chronic overexposures:** Can cause asthma, respiratory sensitization, scarring of the lungs (pulmonary fibrosis), central nervous system damage, secondary Parkinson's disease and reproductive harm in males.

Additional health effects from elevated temperature processing (e.g., welding, melting): **Acute overexposures:** Can cause nausea, fever, chills, shortness of breath and malaise (metal fume fever). **Chronic overexposures:** Can cause the accumulation of fluid in the lungs (pulmonary edema) and lung cancer.

Carcinogenicity and Reproductive Hazard

Product as shipped: Does not present any cancer or reproductive hazards.

Dust and fumes from mechanical processing: Can present a cancer hazard (nickel, cobalt). Can present a reproductive hazard for males (manganese).

Dust and fumes from welding or elevated temperature processing: Can present a cancer hazard (hexavalent chromium compounds, nickel compounds, welding fumes, cobalt compounds). Can present a reproductive hazard for males (manganese).

Medical Conditions Aggravated By Exposure to Product, Components or Compounds Formed During Processing

Dust or fume from processing: Asthma, chronic lung disease, skin rashes and secondary Parkinson's disease.

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

*** Section 3 - Composition / Information on Ingredients ***

Complete composition is provided below and may include some components classified as non-hazardous.

CAS #	Component	Percent
7440-48-4	Cobalt	35-65
7440-47-3	Chromium	15-35
7440-02-0	Nickel	0-35
7440-33-7	Tungsten	0-25
7439-89-6	Iron	0-20
7439-98-7	Molybdenum	0-15
7440-25-7	Tantalum	0-10
7440-62-2	Vanadium	0-5
7439-96-5	Manganese	0-5
7429-90-5	Aluminum	0-5
7440-03-1	Niobium	0-5
7440-21-3	Silicon	0-5
7440-44-0	Carbon	0-5

Component Information

Additional compounds which may be formed during processing are listed in Section 8.

*** Section 4 - First Aid Measures ***

First Aid: Eyes

Dust or fume from processing: Flush eyes with plenty of water or saline for at least 15 minutes. Consult a physician.

First Aid: Skin

Dust or fume from processing: Wash skin with soap and water for at least 15 minutes. Consult a physician if irritation persists.

First Aid: Inhalation

Dust or fume from processing: Remove to fresh air. If unconscious or severely injured, check for clear airway, breathing and presence of pulse. Perform CPR if there is no pulse or respiration. Consult a physician.

*** Section 5 - Fire Fighting Measures ***

Flammable/Combustible Properties

This product does not present fire or explosion hazards as shipped. Dust and fines may be ignitable.

Fire/Explosion

May be a potential hazard under the following conditions:

* Molten metal in contact with water/moisture. Moisture entrapped by molten metal can be explosive. * Dust or fines dispersed in the air can be explosive. Heavily concentrated dusts in air can be explosive if subjected to a strong ignition source.

Extinguishing Media

Use a Class D agent, fluxing salts, graphite or dry sand on dust or fine fires. Otherwise, use fire fighting methods and materials that are appropriate for surrounding fire.

Unsuitable Extinguishing Media

DO NOT USE:

* Water around molten metal.

These agents will react with the burning material.

Fire Fighting Equipment/Instructions

Fire fighters should wear NIOSH approved, positive pressure, self-contained breathing apparatus and full protective clothing when appropriate.

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

*** Section 6 - Accidental Release Measures ***

Small/Large Spill: Avoid generating dust. Recover using mechanical means. Collect scrap for recycling.

*** Section 7 - Handling and Storage ***

Handling/Storage

Avoid generating dust. Avoid contact with sharp edges or heated metal. Product should be kept dry. Do not eat, drink, apply cosmetics, or smoke when handling or using.

Requirements for Remelting of Scrap Material and/or Ingot

Molten metal and water can be an explosive combination. The risk is greatest when there is sufficient molten metal to entrap or seal off the water. Water and other forms of contamination on or contained in scrap or remelt ingot are known to have caused explosions in melting operations. While the products may have minimal surface roughness and internal voids, there remains the possibility of moisture contamination or entrapment. If confined, even a few drops of water can lead to violent explosions.

During melting operations, the following minimum guidelines should be observed:

- * Inspect all materials prior to furnace charging and completely remove surface contamination such as water, ice, snow, deposits of grease and oil or other surface contamination resulting from weather exposure, shipment, or storage.
- * Store materials in dry, heated areas with any cracks or cavities pointed downwards.
- * Preheat and dry large or heavy items such as ingot adequately before charging into a furnace containing molten metal. This is typically done by use of a drying oven or homogenizing furnace. The drying cycle should bring the internal metal temperature of the coldest item of the batch to 400°F and then hold at that temperature for 6 hours.

*** Section 8 - Exposure Controls / Personal Protection ***

Engineering Controls

If dust or fumes are generated through processing: Use with adequate ventilation to meet the limits listed in Section 8, Exposure Guidelines.

Personal Protective Equipment

Respiratory Protection

If dust or fumes are generated through processing: Use NIOSH-approved respiratory protection as specified by an Industrial Hygienist or other qualified professional if concentrations exceed the limits listed in Section 8, Exposure Guidelines. Suggested respiratory protection: N95

Eye Protection Wear safety glasses/goggles to avoid eye injury.

Skin Protection Wear appropriate gloves to avoid any skin injury.

General

Personnel who handle and work with **molten metal** should utilize primary protective clothing like polycarbonate face shields, fire resistant tapper's jackets, neck shades (snoods), leggings, spats and similar equipment to prevent burn injuries. In addition to primary protection, secondary or day-to-day work clothing that is fire resistant and sheds metal splash is recommended for use with molten metal. Synthetic materials should never be worn even as secondary clothing (undergarments).

Exposure Guidelines

A: General Product Information

No Occupational Exposure Limit has been developed specifically for this product.

Alcoa recommends an Occupational Exposure Limit for **Cobalt** of 0.02 mg/m³ TWA.

Alcoa recommends an Occupational Exposure Limit for **Chromium (VI) Compounds [both soluble and insoluble forms]** of 0.25 ug/m³ TWA as chromium.

Alcoa recommends an Occupational Exposure Limit for **Nickel Compounds** of 0.1 mg/m³ TWA.

Alcoa recommends Occupational Exposure Limits for **Manganese** of 0.05 mg/m³ TWA (total particulate) and 0.02 mg/m³ TWA (respirable fraction).

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

B: Component Exposure Limits

Cobalt (7440-48-4)

ACGIH 0.02 mg/m³ TWA
OSHA 0.1 mg/m³ TWA (dust and fume)

Chromium (7440-47-3)

ACGIH 0.5 mg/m³ TWA
OSHA 1 mg/m³ TWA

Nickel (7440-02-0)

ACGIH 1.5 mg/m³ TWA (inhalable fraction)
OSHA 1 mg/m³ TWA

Tungsten (7440-33-7)

ACGIH 5 mg/m³ TWA
ACGIH 10 mg/m³ STEL

Molybdenum (7439-98-7)

ACGIH 10 mg/m³ TWA (inhalable fraction); 3 mg/m³ TWA (respirable fraction)
OSHA 15 mg/m³ TWA (total dust)

Tantalum (7440-25-7)

ACGIH 5 mg/m³ TWA (dust)
OSHA 5 mg/m³ TWA

Vanadium (7440-62-2)

OSHA 0.5 mg/m³ Ceiling (respirable dust, as V₂O₅); 0.1 mg/m³ Ceiling (fume, as V₂O₅)

Manganese (7439-96-5)

ACGIH 0.2 mg/m³ TWA
OSHA 5 mg/m³ Ceiling (fume)

Aluminum (7429-90-5)

ACGIH 10 mg/m³ TWA (metal dust)
OSHA 15 mg/m³ TWA (total dust); 5 mg/m³ TWA (respirable fraction)

Silicon (7440-21-3)

OSHA 15 mg/m³ TWA (total dust); 5 mg/m³ TWA (respirable fraction)

C: Exposure Limits for Additional Compounds Which May Be Formed During Processing

Chromium (II) compounds (Not Available)

OSHA 0.5 mg/m³ TWA (as Cr)

Chromium (III) Compounds (Not Available)

ACGIH 0.5 mg/m³ TWA (as Cr)
OSHA 0.5 mg/m³ TWA (as Cr)

Chromium (VI) compounds- water soluble (Not Available)

ACGIH 0.05 mg/m³ TWA (as Cr)

Chromium (VI) compounds (certain water insoluble forms) (Not Available)

ACGIH 0.01 mg/m³ TWA (as Cr)

Chromium (VI) (18540-29-9)

OSHA 2.5 µg/m³ Action Level; 5 µg/m³ TWA (Cancer hazard - See 29 CFR 1910.1026)

Nickel insoluble compounds (Not Available)

ACGIH 0.2 mg/m³ TWA (inhalable fraction, as Ni)
OSHA 1 mg/m³ TWA (as Ni)

Tungsten, insoluble compounds (Not Available)

ACGIH 5 mg/m³ TWA (as W)
ACGIH 10 mg/m³ STEL (as W)

Iron oxide (1309-37-1)

ACGIH 5 mg/m³ TWA (respirable fraction)
OSHA 10 mg/m³ TWA

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Molybdenum insoluble compounds (Not Available)

ACGIH 10 mg/m³ TWA (inhalable fraction, as Mo); 3 mg/m³ TWA (respirable fraction, as Mo)

OSHA 15 mg/m³ TWA (total dust)

Tantalum oxide (1314-61-0)

ACGIH 5 mg/m³ TWA (dust, as Ta)

OSHA 5 mg/m³ TWA (dust)

Vanadium pentoxide (1314-62-1)

ACGIH 0.05 mg/m³ TWA (dust or fume, respirable fraction)

OSHA 0.5 mg/m³ Ceiling (respirable dust, as V₂O₅); 0.1 mg/m³ Ceiling (fume, as V₂O₅)

Manganese compounds, inorganic (Not Available)

ACGIH 0.2 mg/m³ TWA (as Mn)

OSHA 5 mg/m³ Ceiling (as Mn) (related to Manganese compounds)

Aluminum oxide (1344-28-1)

ACGIH 10 mg/m³ TWA (particulate matter containing no asbestos and <1% crystalline silica)

OSHA 15 mg/m³ TWA (total dust); 5 mg/m³ TWA (respirable fraction)

*** Section 9 - Physical & Chemical Properties ***

Physical State: Solid

Boiling Point: Not determined

Vapor Pressure: Not applicable

Solubility in Water: Not soluble

Density: 550 lb/ft³ (8.8 g/cm³)

Odor: Odorless

Octanol-Water Coefficient: Not applicable

Appearance: Metallic appearance

Melting Point: 2719°F (1493°C) Cobalt

Vapor Density: Not applicable

Specific Gravity: See Density

pH Level: Not applicable

Odor Threshold: Not applicable

*** Section 10 - Chemical Stability & Reactivity Information ***

Stability Stable under normal conditions of use, storage, and transportation.

Conditions to Avoid

In powder form, can react with strong oxidizers such as concentrated nitric acid. Molten metal can react violently/explosively with water or moisture, particularly when the water is entrapped.

*** Section 11 - Toxicological Information ***

Health Effects Associated with Individual Ingredients

Cobalt Can cause irritation of eyes, skin and respiratory tract. Skin contact: Can cause allergic reactions. Acute and chronic overexposures: Can cause respiratory sensitization, asthma, scarring of the lungs (pulmonary fibrosis) and damage to the heart muscle (cardiomyopathy). **Cobalt and certain cobalt compounds** IARC/NTP: Listed as possibly carcinogenic to humans by IARC (Group 2B)*.

Chromium dust and mist Can cause irritation of eyes, skin and respiratory tract. **Chromium and trivalent chromium** IARC/NTP: Listed as "unclassifiable as to carcinogenicity in humans" by IARC (Group 3).

Nickel dust and fumes Can cause irritation of eyes, skin and respiratory tract. Eye contact: Can cause inflammation of the eyes and eyelids (conjunctivitis). Skin contact: Can cause sensitization and allergic contact dermatitis. Chronic overexposures: Can cause perforation of the nasal septum, inflammation of the nasal passages (sinusitis), respiratory sensitization, asthma and scarring of the lungs (pulmonary fibrosis). **Nickel alloys** IARC/NTP: Reviewed but not recommended for listing by the NTP. Listed as possibly carcinogenic to humans by IARC (Group 2B)*.

Tungsten dust Can cause irritation of eyes, skin and upper respiratory tract.

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Molybdenum dust and fumes Can cause irritation of mucous membranes, skin and respiratory tract. Acute overexposures: Can cause headache, backache and sore joints. Chronic overexposures: Can cause deformities of the joints, blood disorders, kidney damage, lung damage and liver damage.

Tantalum and tantalum oxide Can cause mechanical irritation of eyes, skin and upper respiratory tract. Generally of low toxicity.

Manganese dust or fumes Chronic overexposures: Can cause inflammation of the lung tissue, scarring of the lungs (pulmonary fibrosis), central nervous system damage, secondary Parkinson's disease and reproductive harm in males.

Aluminum dust, fines and fumes Low health risk by inhalation. Generally considered to be biologically inert.

Niobium dust and fumes Acute overexposures: Generally of low toxicity. Chronic overexposures: Can cause lung damage.

Silicon, inert dusts Chronic overexposures: Can cause chronic bronchitis and narrowing of the airways.

Health Effects Associated with Individual Compounds Formed During Processing

(The following could be expected if welded, remelted or otherwise processed at elevated temperatures.)

Hexavalent chromium (Chrome VI) Can cause irritation of eyes, skin and respiratory tract. Skin contact: Can cause irritant dermatitis, allergic reactions and skin ulcers. Chronic overexposures: Can cause perforation of the nasal septum, respiratory sensitization, asthma, the accumulation of fluid in the lungs (pulmonary edema), lung damage, kidney damage, lung cancer, nasal cancer and cancer of the gastrointestinal tract. IARC/NTP: Listed as "known to be a human carcinogen" by the NTP. Listed as carcinogenic to humans by IARC (Group 1)*.

Nickel compounds Associated with lung cancer, cancer of the vocal cords and nasal cancer. IARC/NTP: Listed as "known to be a human carcinogen" by the NTP. Listed as carcinogenic to humans by IARC (Group 1)*.

Iron oxide Chronic overexposures: Can cause benign lung disease (siderosis). Ingestion: Can cause irritation of gastrointestinal tract, bleeding, changes in the pH of the body fluids (metabolic acidosis) and liver damage.

Molybdenum trioxide Can cause irritation of eyes, mucous membranes and upper respiratory tract. Chronic overexposures: Can cause reduction in the number of red blood cells (anemia), predisposition to gout, thyroid function changes, liver damage and lung damage. Additional information: Studies with experimental animals by inhalation have found lung cancer.

Vanadium pentoxide Can cause irritation of eyes, skin and respiratory tract. Skin contact (prolonged or repeated): Can cause sensitization and dermatitis. Acute overexposures: Can cause inflammation of the eyes and eyelids (conjunctivitis), bronchitis and the accumulation of fluid in the lungs (pulmonary edema). Effects can be delayed for several days. Chronic overexposures: Can cause kidney damage, blindness, asthma and emphysema. IARC/NTP: Listed as possibly carcinogenic to humans by IARC (Group 2B)*.

Manganese oxide fumes Can cause irritation of eyes, skin and respiratory tract. Acute overexposures: Can cause nausea, fever, chills, shortness of breath and malaise (metal fume fever).

Alumina (aluminum oxide) Low health risk by inhalation. Generally considered to be biologically inert.

Silica, amorphous Acute overexposures: Can cause dryness of eyes, nose and upper respiratory tract.

Acute Toxicity of Ingredients/Formed Compounds

A: General Product Information No information available for product.

B: Component Analysis - LD50/LC50

Cobalt (7440-48-4) Inhalation LC50 Rat: >10 mg/L/1H; Oral LD50 Rat:6170 mg/kg

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Nickel (7440-02-0) Oral LD50 Rat: >9000 mg/kg
Iron (7439-89-6) Oral LD50 Rat: 984 mg/kg
Manganese (7439-96-5) Oral LD50 Rat: 9 g/kg
Silicon (7440-21-3) Oral LD50 Rat: 3160 mg/kg
Carbon (7440-44-0) Oral LD50 Rat: >10000 mg/kg

C: Formed Compound Toxicity - LD50s/LC50s

Iron oxide (1309-37-1) Oral LD50 Rat: >10000 mg/kg
Tantalum oxide (1314-61-0) Oral LD50 Rat: 8 g/kg
Vanadium pentoxide (1314-62-1)
 Inhalation LC50 Rat: 2.21 mg/L/4H; Oral LD50 Rat: 10 mg/kg; Dermal LD50 Rat: >2500 mg/kg
Aluminum oxide (1344-28-1) Oral LD50 Rat: >5000 mg/kg
Silicon dioxide (amorphous) (69012-64-2)
 Oral LD50 Rat: >5000 mg/kg; Inhalation LC50 Rat: >2.2 mg/L/1H; Dermal LD50 Rabbit: >2000 mg/kg (related to Silica, amorphous)

Carcinogenicity of Ingredients

A: Ingredient Carcinogenicity - IARC/NTP

Component	CAS	IARC 1	IARC 2A	IARC 2B	IARC 3	IARC 4	NTP K	NTP RA
Cobalt	7440-48-4	No	No	Yes	No	No	No	No
Chromium	7440-47-3	No	No	No	Yes	No	No	No
Nickel	7440-02-0	No	No	Yes	No	No	No	No

B: Ingredient Carcinogenicity - ACGIH

Cobalt (7440-48-4)
 ACGIH A3 - Confirmed animal carcinogen with unknown relevance to humans
Chromium (7440-47-3)
 ACGIH A4 - Not Classifiable as a Human Carcinogen
Nickel (7440-02-0)
 ACGIH A5 - Not Suspected as a Human Carcinogen

C: Ingredient References

Cobalt (7440-48-4)
 IARC Monograph 86 [2006] (without tungsten carbide), Monograph 52 [1991]
Chromium (7440-47-3)
 IARC Monograph 49 [1990] (listed under Chromium and Chromium compounds), Supplement 7 [1987]
Nickel (7440-02-0)
 IARC Monograph 49 [1990], Supplement 7 [1987]

Carcinogenicity of Compounds Formed During Processing

A: Formed Compound Carcinogenicity - IARC/NTP

Component	CAS	IARC 1	IARC 2A	IARC 2B	IARC 3	IARC 4	NTP K	NTP RA
Chromium (III) Compounds	Not Available	No	No	No	Yes	No	No	No
Chromium (VI) compounds (certain water insoluble forms)	Not Available	Yes	No	No	No	No	Yes	No
Nickel compounds	Not Available	Yes	No	No	No	No	Yes	No
Iron oxide	1309-37-1	No	No	No	Yes	No	No	No
Vanadium pentoxide	1314-62-1	No	No	Yes	No	No	No	No
Silicon dioxide (amorphous) (related to Silica, amorphous)	69012-64-2	No	No	No	Yes	No	No	No

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

B: Formed Compound Carcinogenicity - ACGIH

Chromium (III) Compounds (Not Available)

ACGIH A4 - Not Classifiable as a Human Carcinogen

Chromium (VI) compounds- water soluble (Not Available)

ACGIH A1 - Confirmed Human Carcinogen

Chromium (VI) compounds (certain water insoluble forms) (Not Available)

ACGIH A1 - Confirmed Human Carcinogen

Nickel insoluble compounds (Not Available)

ACGIH A1 - Confirmed Human Carcinogen

Iron oxide (1309-37-1)

ACGIH A4 - Not Classifiable as a Human Carcinogen

Vanadium pentoxide (1314-62-1)

ACGIH A4 - Not Classifiable as a Human Carcinogen (dust and fume)

Aluminum oxide (1344-28-1)

ACGIH A4 - Not Classifiable as a Human Carcinogen

C: Formed Compound References

Chromium (III) Compounds (Not Available)

IARC Monograph 49 [1990] (listed under Chromium and Chromium compounds), Supplement 7 [1987]

Chromium (VI) compounds (certain water insoluble forms) (Not Available)

IARC Monograph 49 [1990] (evaluated as a group)

Chromium (VI) (18540-29-9)

IARC Monograph 49 [1990] (evaluated as a group)

Nickel compounds (Not Available)

IARC Monograph 49 [1990] (evaluated as a group)

Iron oxide (1309-37-1)

IARC Supplement 7 [1987], Monograph 1 [1972]

Vanadium pentoxide (1314-62-1)

IARC Monograph 86 [2006]

Silicon dioxide (amorphous) (69012-64-2)

IARC Monograph 68 [1997], Supplement 7 [1987] (related to Silica, amorphous)

Descriptions of IARC and NTP Classifications

IARC 1: The agent is carcinogenic to humans. There is sufficient evidence that a causal relationship existed between exposure to the agent and human cancer.

IARC 2A: The agent is probably carcinogenic to humans. Generally includes agents for which there is limited evidence of carcinogenicity in humans and sufficient evidence of carcinogenicity in experimental animals.

IARC 2B: The agent is possibly carcinogenic to humans. Generally includes agents for which there is limited evidence in humans and less than sufficient evidence in experimental animals.

IARC 3: The agent is not classifiable as to its carcinogenicity to humans. Generally includes agents for which there is inadequate evidence in humans and inadequate or limited evidence in experimental animals.

IARC 4: The agent is probably not carcinogenic to humans. Generally includes agents for which there is evidence suggesting lack of carcinogenicity in humans and in experimental animals.

NTP K: Known to be a human carcinogen.

NTP RA: Reasonably anticipated to be a human carcinogen.

* * * Section 12 - Ecological Information * * *

Ecotoxicity

A: General Product Information No information available for product.

B: Component Analysis - Ecotoxicity - Aquatic Toxicity

Cobalt (7440-48-4) 96 Hr LC50 Brachydanio rerio: >100 mg/L [static]

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Nickel (7440-02-0)

96 Hr LC50 Oncorhynchus mykiss: 31.7 mg/L (adult); 96 Hr LC50 Pimephales promelas: 3.1 mg/L; 96 Hr LC50 Brachydanio rerio: >100 mg/L

72 Hr EC50 freshwater algae (4 species): 0.1 mg/L; 72 Hr EC50 Selenastrum capricornutum: 0.18 mg/L

96 Hr EC50 water flea: 510 µg/L

Iron (7439-89-6) 96 Hr LC50 Morone saxatilis: 13.6 mg/L [static]

Environmental Fate No information available for product.

*** Section 13 - Disposal Considerations ***

Disposal Instructions Reuse or recycle material whenever possible.

US EPA Waste Number & Descriptions

A: General Product Information

If reuse or recycle is not possible, then characterize in accordance with applicable regulations (40 CFR 261 or state equivalent in the U.S.) prior to disposal. TCLP testing is recommended for chromium.

B: Component Waste Numbers

RCRA waste codes other than described under Section A may apply depending on use of product. Refer to 40 CFR 261 or state equivalent in the U.S.

*** Section 14 - Transportation Information ***

Special Transportation

	PSN #1	PSN #2	PSN #3	PSN #4
Notes:	(1)			
UN NA Number:	-			
Proper Shipping Name:	Not regulated			
Hazard Class:	-			
Packing Group:	-			
RQ:	-			
Other - Tech Name:	-			
Other - Marine Pollutant:	-			

Notes:

- (1) When "Not regulated," enter the proper freight classification, "MSDS Number," and "Product Name" on the shipping paperwork.

Canadian Controlled Products Regulation PIN:	Not regulated
--	---------------

*** Section 15 - Regulatory Information ***

US Federal Regulations

A: General Product Information

In reference to Title VI of the Clean Air Act of 1990, this material does not contain nor was it manufactured using ozone-depleting chemicals.

B: Component Analysis

This material contains one or more of the following chemicals required to be identified under SARA Section 302 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65) and/or CERCLA (40 CFR 302.4).

Cobalt (7440-48-4)

SARA 313: 0.1 % de minimis concentration

Chromium (7440-47-3)

SARA 313: 1.0 % de minimis concentration

CERCLA: 5000 lb final RQ (no reporting of releases of this hazardous substance is required if the diameter of the pieces of the solid metal released is larger than 100 micrometers);
2270 kg final RQ (no reporting of releases of this hazardous substance is required if the diameter of the pieces of the solid metal released is larger than 100 micrometers)

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Nickel (7440-02-0)

SARA 313: 0.1 % de minimis concentration

CERCLA: 100 lb final RQ (no reporting of releases of this hazardous substance is required if the diameter of the pieces of the solid metal released is larger than 100 micrometers); 45.4 kg final RQ (no reporting of releases of this hazardous substance is required if the diameter of the pieces of the solid metal released is larger than 100 micrometers)

Vanadium (7440-62-2)

SARA 313: 1.0 % de minimis concentration (except when contained in an alloy)

Manganese (7439-96-5)

SARA 313: 1.0 % de minimis concentration

Aluminum (7429-90-5)

SARA 313: 1.0 % de minimis concentration (dust or fume only)

SARA 311/312 Physical and Health Hazard Categories:

Immediate (acute) Health Hazard: Yes, if particulates/fumes generated during processing

Delayed (chronic) Health Hazard: Yes, if particulates/fumes generated during processing

Fire Hazard: No

Sudden Release of Pressure: No

Reactive: No

State Regulations

A: General Product Information PENNSYLVANIA "Special Hazardous Substance": Chromium, Nickel

Chemical(s) known to the State of California to cause cancer: Chromium (hexavalent compounds), Cobalt metal powder, Nickel (metallic) and nickel compounds

B: Component Analysis - State

The following components appear on one or more of the following state hazardous substances lists:

Component	CAS #	CA	FL	MA	MN	NJ	PA
Cobalt	7440-48-4	Yes	No	Yes	Yes	Yes	Yes
Chromium	7440-47-3	Yes	No	Yes	Yes	Yes	Yes
Nickel	7440-02-0	Yes	No	Yes	Yes	Yes	Yes
Tungsten	7440-33-7	Yes	No	Yes	Yes	Yes	Yes
Iron	7439-89-6	Yes	No	No	No	No	No
Molybdenum	7439-98-7	Yes	No	Yes	Yes	Yes	Yes
Tantalum	7440-25-7	Yes	No	Yes	Yes	Yes	Yes
Vanadium	7440-62-2	Yes	No	Yes	No	Yes	Yes
Manganese	7439-96-5	Yes	No	Yes	Yes	Yes	Yes
Aluminum	7429-90-5	Yes	No	Yes	Yes	Yes	Yes
Silicon	7440-21-3	No	No	Yes	Yes	Yes	Yes

The following statement(s) are provided under the California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65):

WARNING! This product contains a chemical known to the state of California to cause cancer.

Other Regulations

A: General Product Information Material meets the criteria for inclusion in WHMIS Class D2A.

B: Component Analysis - WHMIS IDL

The following components are identified under the Canadian Hazardous Products Act Ingredient Disclosure List:

Component	CAS #	Minimum Concentration
Cobalt	7440-48-4	0.1 %
Chromium	7440-47-3	0.1 %
Nickel	7440-02-0	0.1 %
Tungsten	7440-33-7	1 %
Molybdenum	7439-98-7	1 %
Tantalum	7440-25-7	1 %
Vanadium	7440-62-2	1 %
Manganese	7439-96-5	1 %
Aluminum	7429-90-5	1 %

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

C: Component Analysis - Inventory

Component	CAS #	TSCA	DSL	EINECS	AUST.	MITI
Cobalt	7440-48-4	Yes	Yes	Yes	Yes	No
Chromium	7440-47-3	Yes	Yes	Yes	Yes	No
Nickel	7440-02-0	Yes	Yes	Yes	Yes	No
Tungsten	7440-33-7	Yes	Yes	Yes	Yes	No
Iron	7439-89-6	Yes	Yes	Yes	Yes	No
Molybdenum	7439-98-7	Yes	Yes	Yes	Yes	No
Tantalum	7440-25-7	Yes	Yes	Yes	Yes	No
Vanadium	7440-62-2	Yes	Yes	Yes	Yes	No
Manganese	7439-96-5	Yes	Yes	Yes	Yes	No
Aluminum	7429-90-5	Yes	Yes	Yes	Yes	No
Niobium	7440-03-1	Yes	Yes	Yes	Yes	No
Silicon	7440-21-3	Yes	Yes	Yes	Yes	No
Carbon	7440-44-0	Yes	Yes	Yes	Yes	No

Inventory information

MITI Inventory: Pure metals are not specifically listed by CAS or MITI number on the MITI Inventory. However, the class of compounds for each of these metals is listed.

* * * Section 16 - Other Information * * *

MSDS History

Original: June 18, 2001

Supersedes: October 11, 2004

Revised: April 22, 2008

MSDS Status

04/22/2008: Reviewed on a periodic basis in accordance with Alcoa policy. Changes in Sections 1, 2, 3, 4, 5, 8, 11, 12, 13, 14 & 15.

10/11/2004: Combined with Alcoa MSDS #'s 1148 and 1149. Changes in Sections 1, 2, 3, 8 and 15. Covers some products formerly on Howmet MSDSs 201, 202, 203, 204, 205, 206 and 504.

06/18/2001: New MSDS; covers some products formerly on Howmet MSDS 201.

Prepared By

Hazardous Materials Control Committee

Preparer: Stephanie Williams, 412-553-1479/Jon N. Peace, 412-553-2293

MSDS System Number

159242

Other Information

* Guide to Occupational Exposure Values-2007, Compiled by the American Conference of Governmental Industrial Hygienists (ACGIH).

* Documentation of the Threshold Limit Values and Biological Exposure Indices, Sixth Edition, 1991, Compiled by the American Conference of Governmental Industrial Hygienists, Inc. (ACGIH).

* NIOSH Pocket Guide to Chemical Hazards, U.S. Department of Health and Human Services, February 2004.

* Patty's Industrial Hygiene and Toxicology: Volume II: Toxicology, 4th ed., 1994, Patty, F. A.; edited by Clayton, G. D. and Clayton, F. E.: New York: John Wiley & Sons, Inc.

* expub, www.expub.com, Expert Publishing, LLC.

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Key-Legend:

ACGIH	American Conference of Governmental Industrial Hygienists
AICS	Australian Inventory of Chemical Substances
CAS	Chemical Abstract Service
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CFR	Code of Federal Regulations
CPR	Cardio-pulmonary Resuscitation
DOT	Department of Transportation
DSL	Domestic Substances List (Canada)
EC	Effective Concentration
ED	Effective Dose
EINECS	European Inventory of Existing Commercial Chemical Substances
EPA	Environmental Protection Act
IARC	International Agency for Research on Cancer
LC ₅₀	Lethal concentration (50 percent kill)
LC _{Lo}	Lowest published lethal concentration
LD ₅₀	Lethal dose (50 percent kill)
LD _{Lo}	Lowest published lethal dose
LFL	Lower Flammable Limit
MITI	Ministry of International Trade & Industry
NFPA	National Fire Protection Association
NIOSH	National Institute for Occupational Safety and Health
NORM	Naturally Occurring Radioactive Materials
NTP	National Toxicology Program
OEL	Occupational Exposure Limit
OSHA	Occupational Safety and Health Administration
PEL	Permissible Exposure Limit
PIN	Product Identification Number
PSN	Proper Shipping Name
RCRA	Resource Conservation and Recovery Act
SARA	Superfund Amendments and Reauthorization Act
STEL	Short Term Exposure Limit
TCLP	Toxic Chemicals Leachate Program
TDG	Transportation of Dangerous Goods
TLV	Threshold Limit Value
TSCA	Toxic Substance Control Act
TWA	Time Weighted Average
UFL	Upper Flammable Limit
WHMIS	Workplace Hazardous Materials Information System
atm	atmosphere
cm	centimeter
g, gm	gram
in	inch
kg	kilogram
lb	pound
m	meter
mg	milligram
ml, ML	milliliter
mm	millimeter
mppcf	million particles per cubic foot
n.o.s.	not otherwise specified
ppb	parts per billion
ppm	parts per million
psia	pounds per square inch absolute
u	micron
ug	microgram

INFORMATION HEREIN IS GIVEN IN GOOD FAITH AS AUTHORITATIVE AND VALID; HOWEVER, NO WARRANTY, EXPRESS OR IMPLIED, CAN BE MADE.

This is the end of MSDS # 1147

COBALT-BASED ALLOYS



WARNING

Physical Hazards: Non-combustible as supplied. Dust and fines from processing may be ignitable. Explosion/fire hazards may be present when (1) molten metal is in contact with water or moisture or (2) heavily concentrated dust clouds are dispersed in air.

Health Hazards: Health effects generally expected in cases of overexposures:

EYES: Dust or fume from processing: Can cause irritation.

SKIN: Dust or fume from processing: Can cause irritation, sensitization and allergic contact dermatitis.

INHALATION: Health effects from mechanical processing (e.g., cutting, grinding): Can cause upper respiratory tract irritation. **Chronic overexposures:** Can cause asthma, respiratory sensitization, scarring of the lungs (pulmonary fibrosis), central nervous system damage, secondary Parkinson's disease and reproductive harm in males. Additional health effects from elevated temperature processing (e.g., welding, melting): **Acute overexposures:** Can cause nausea, fever, chills, shortness of breath and malaise (metal fume fever). **Chronic overexposures:** Can cause the accumulation of fluid in the lungs (pulmonary edema) and lung cancer.

WARNING: Cobalt metal powder, Chromium (hexavalent compounds) and nickel (metallic) and nickel compounds are chemicals known to the State of California to cause cancer (Proposition 65).

Precautions: Avoid generating dust. Use with adequate ventilation. Keep material dry. Use appropriate personal protective equipment (safety glasses/gloves) to avoid injury. Use appropriate NIOSH approved respiratory protection (N95) if concentrations exceed the permissible limits.

First Aid (dust or fume from processing): EYES: Flush eyes with plenty of water or saline for at least 15 minutes. Consult a physician. SKIN: Wash skin with soap and water for at least 15 minutes. Consult a physician if irritation persists. INHALATION: Remove to fresh air. If unconscious or severely injured, check for clear airway, breathing and presence of pulse. Perform CPR if there is no pulse or respiration. Consult a physician.

In case of fire: Use a Class D agent, fluxing salts, graphite or dry sand on dust or fine fires. Otherwise, use fire fighting methods and materials that are appropriate for surrounding fire. Do NOT use water around molten metal. This will react with the burning material.

Read Alcoa Material Safety Data Sheet No. 1147 for more information about use and disposal.

Emergency Phone: (412) 553-4001.

INGREDIENTS:	CAS No:	INGREDIENTS:	CAS No:
Cobalt	(7440-48-4)	Vanadium	(7440-62-2)
Chromium	(7440-47-3)	Manganese	(7439-96-5)
Nickel	(7440-02-0)	Aluminum	(7429-90-5)
Tungsten	(7440-33-7)	Niobium	(7440-03-1)
Iron	(7439-89-6)	Silicon	(7440-21-3)
Molybdenum	(7439-98-7)	Carbon	(7440-44-0)
Tantalum	(7440-25-7)		

Alcoa Inc.

201 Isabella Street, Pittsburgh, PA 15212-5858 USA

4/08 1147



ERROR: undefined
OFFENDING COMMAND: get

STACK:

/quit
-dictionary-
-mark-



Material Safety Data Sheet Cyanide Standard, 1000 ppm

Section 1 - Chemical Product and Company Identification

MSDS Name:

Cyanide Standard, 1000 ppm

Catalog Numbers:

LC13545

Synonyms:

None

Company Identification:

LabChem Inc
200 William Pitt Way
Pittsburgh, PA 15238

Company Phone Number:

(412) 826-5230

Emergency Phone Number:

(800) 424-9300

CHEMTREC Phone Number:

(800) 424-9300

Section 2 – Composition, Information on Ingredients

CAS#	Chemical Name:	Percent
7732-18-5	Water	balance
1310-73-2	Sodium hydroxide	<0.16
151-50-8	Potassium cyanide	0.25

Section 3 - Hazards Identification

Emergency Overview

Appearance: *Clear, colorless solution*

Danger! May be fatal if inhaled, swallowed, or absorbed through the skin. Contact with acids liberates toxic gas. May cause long-term effects in the aquatic environment. May cause irritation to eyes, skin, respiratory, and gastrointestinal tracts.

Target Organs: *Central nervous system, lungs, eyes, thyroid, skin*

Potential Health Effects

Eye:

Causes eye irritation.

Skin:

Causes skin irritation. If absorbed through the skin, causes symptoms similar to those of ingestion.

Ingestion:

May be fatal if swallowed. Causes tissue anoxia, characterized by weakness, headache, dizziness, confusion, cyanosis, weak and irregular heartbeat, collapse, unconsciousness, convulsions and



Material Safety Data Sheet Cyanide Standard, 1000 ppm

death, sometimes within 1-15 minutes. May cause gastrointestinal irritation with nausea, vomiting and diarrhea.

Inhalation:

Causes respiratory tract irritation. Inhalation of high concentrations of vapors may cause effects similar to those of ingestion.

Chronic:

Exposure to low levels over long periods of time may cause loss of appetite, headache, nausea, dizziness, upper respiratory tract irritation. Prolonged skin contact may cause dermatitis and "cyanide rash" characterized by itching. Prolonged eye contact may cause conjunctivitis and corrosion of cornea.

Section 4 - First Aid Measures

Eyes:

Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower lids until chemical is gone. Get medical aid at once.

Skin:

Immediately flush skin with plenty of soap and water for at least 15 minutes while removing contaminated clothing and shoes. Get medical aid at once.

Ingestion:

SPEEDY ACTION IS CRITICAL. NOTIFY MEDICAL PERSONNEL IMMEDIATELY. Call a poison control center. If conscious, drink water, then induce vomiting with syrup of ipecac. If unconscious, immediately take victim to a physician and do NOT attempt to induce vomiting.

Inhalation:

SPEEDY ACTION IS CRITICAL. NOTIFY MEDICAL PERSONNEL IMMEDIATELY. Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Do NOT use mouth-to-mouth resuscitation.

Notes to Physician:

Exposure should be treated as a cyanide poisoning.

Section 5 - Fire Fighting Measures

General Information:

As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Combustion generates toxic fumes.

Extinguishing Media:

Substance is noncombustible; use agent most appropriate to extinguish surrounding fire. Do NOT use carbon dioxide.

Autoignition Temperature:

Not applicable

Flash Point:

Not applicable

NFPA Rating:

CAS# 7732-18-5: Health- 0, Flammability- 0, Instability- 0.

CAS# 1310-73-2: Health- 3, Flammability- 0, Instability- 1.

CAS# 151-50-8: Health- 4, Flammability- 0, Instability- 1.

Explosion Limits:

Lower: n/a Upper: n/a



Material Safety Data Sheet Cyanide Standard, 1000 ppm

Section 6 - Accidental Release Measures

General Information:

Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks:

Absorb spills with absorbent (vermiculite, sand, fuller's earth) and place in plastic bags for later disposal. Clean up spills immediately, observing precautions in the Protective Equipment section.

Section 7 - Handling and Storage

Handling:

Wash thoroughly after handling. Use with adequate ventilation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Do not ingest or inhale. Wash clothing before reuse.

Storage:

Store in a tightly closed container. Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances. Keep away from acids.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls:

Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations below the permissible exposure limits.

Exposure Limits:

Chemical Name:	ACGIH	NIOSH	OSHA
Water	none listed	none listed	none listed
Sodium hydroxide	2 mg/m ³ Ceiling	10 mg/m ³ IDLH	2 mg/m ³ TWA
Potassium cyanide	5 mg/m ³ Ceiling (as CN) (listed as Hydrogen cyanide and cyanide salts)	25 mg/m ³ IDLH (as CN)	5 mg/m ³ TWA (listed under Cyanide anion)

OSHA Vacated PELs:

None.

Personal Protective Equipment**Eyes:**

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin:

Wear appropriate gloves to prevent skin exposure.

Clothing:

Wear appropriate protective clothing to prevent skin exposure.

Respirators:

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.



Material Safety Data Sheet Cyanide Standard, 1000 ppm

Section 9 - Physical and Chemical Properties

Physical State:	Clear liquid
Color:	Colorless
Odor:	Odorless to slight odor of bitter almond
pH:	Alkaline
Vapor Pressure:	Not available
Vapor Density:	Not available
Evaporation Rate:	Not available
Viscosity:	Not available
Boiling Point:	>100°C (>212°F)
Freezing/Melting Point:	<0°C (<32°F)
Decomposition Temperature:	Not available
Solubility in water:	Soluble
Specific Gravity/Density:	1.0
Molecular Formula:	Not applicable
Molecular Weight:	Not applicable

Section 10 - Stability and Reactivity

Chemical Stability:

Absorbs carbon dioxide from the air.

Conditions to Avoid:

Incompatible materials, excess heat.

Incompatibilities with Other Materials:

Acids, bases, aluminum, chlorates, permanganates, peroxides, zinc, aldehydes, metallic salts, chloral hydrate, iodine.

Hazardous Decomposition Products:

Hydrogen cyanide, nitrogen oxides, potassium oxides.

Hazardous Polymerization:

Has not been reported.

Section 11- Toxicological Information

RTECS:

CAS# 7732-18-5: ZC0110000.

CAS# 1310-73-2: WB4900000.

CAS# 151-50-8: TS8750000.

LD50/LC50:

CAS# 7732-18-5:

Oral, rat: LD50 = >90 mL/kg.

CAS# 1310-73-2:

Draize test, rabbit, eye: 50ug/24h Severe,

Draize test, rabbit, skin: 500mg/24h Severe

CAS# 151-50-8:

Oral, mouse: LD50 = 8500 ug/kg

Oral, rabbit: LD50 = 5 mg/kg

Oral, rat: LD50 = 5 mg/kg



Material Safety Data Sheet Cyanide Standard, 1000 ppm

Carcinogenicity:

CAS# 7732-18-5: Not listed as a carcinogen by ACGIH, IARC, NIOSH, NTP, OSHA, or CA Prop 65.
CAS# 1310-73-2: Not listed as a carcinogen by ACGIH, IARC, NIOSH, NTP, OSHA, or CA Prop 65.
CAS# 151-50-8: Not listed as a carcinogen by ACGIH, IARC, NIOSH, NTP, OSHA, or CA Prop 65.

Epidemiology:

Workers exposed to cyanide long-term experienced headaches, weakness, changes in taste and smell, irritation of the throat, vomiting, and effort dyspnea. Enlargement of the thyroid occurred in 50% of the workers.

Teratogenicity:

Animal studies have only shown harmful effects in the offspring of animals exposed to doses that also produced significant maternal toxicity.

Reproductive:

See actual entry in RTECS for complete information.

Mutagenicity:

See actual entry in RTECS for complete information.

Neurotoxicity:

No information found

Section 12 - Ecological Information

No information found

Section 13 - Disposal Considerations

Dispose of in accordance with Federal, State, and local regulations.

Section 14 - Transport Information

US DOT

Shipping Name: Not regulated.

Hazard Class:

UN Number:

Packing Group:

Section 15 - Regulatory Information

US Federal

TSCA:

CAS# 7732-18-5 is listed on the TSCA Inventory.

CAS# 1310-73-2 is listed on the TSCA Inventory.

CAS# 151-50-8 is listed on the TSCA Inventory.

SARA Reportable Quantities (RQ):

CAS# 1310-73-2: final RQ = 1000 pounds (454 kg)

CAS# 151-50-8: final RQ = 10 pounds (4.54 kg)

CERCLA/SARA Section 313:

None of the components are on this list.



Material Safety Data Sheet Cyanide Standard, 1000 ppm

OSHA - Highly Hazardous:

None of the chemicals in this product are considered highly hazardous by OSHA.

US State

State Right to Know:

Sodium hydroxide can be found on the following state Right-to-Know lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.

Potassium cyanide can be found on the following state Right-to-Know lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.

California Regulations:

None.

European/International Regulations

Canadian DSL/NDSL:

CAS# 7732-18-5 is listed on Canada's DSL List.

CAS# 1310-73-2 is listed on Canada's DSL List.

CAS# 151-50-8 is listed on Canada's DSL List.

Canada Ingredient Disclosure List:

CAS# 7732-18-5 is not listed on Canada's Ingredient Disclosure List.

CAS# 1310-73-2 is listed on Canada's Ingredient Disclosure List.

CAS# 151-50-8 is not listed on Canada's Ingredient Disclosure List as Cyanides, inorganic salts.

Section 16 - Other Information

MSDS Creation Date: July 20, 1998

Revision Date: October 13, 2009

Information in this MSDS is from available published sources and is believed to be accurate. No warranty, express or implied, is made and LabChem Inc. assumes no liability resulting from the use of this MSDS. The user must determine suitability of this information for his application.

MATERIAL SAFETY DATA SHEET

Prepared to U.S. OSHA, CMA, ANSI and Canadian WHMIS Standards

1. PRODUCT IDENTIFICATION

CHEMICAL NAME; CLASS: NON-FLAMMABLE GAS MIXTURE

Containing One or More of the Following Components in a Nitrogen Balance Gas:Oxygen, 0.0015-23.5%;Methane, 0.0005-2.5%;Carbon Monoxide, 0.0005-1.0%; Hydrogen Sulfide, 0.001-0.025%

SYNONYMS: Not Applicable

CHEMICAL FAMILY NAME: Not Applicable

FORMULA: Not Applicable

Document Number: 50018

Note: The Material Safety Data Sheet is for this gas mixture supplied in cylinders with 33 cubic feet (935 liters) or less gas capacity (DOT - 39 cylinders). This MSDS has been developed for various gas mixtures with the composition of components within the ranges listed in Section 2 (Composition and Information on Ingredients). Refer to the product label for information on the actual composition of the product.

PRODUCT USE:	Calibration of Monitoring and Research Equipment
SUPPLIER/MANUFACTURER'S NAME:	CALGAZ
ADDRESS:	821 Chesapeake Drive Cambridge, MD 21613
EMERGENCY PHONE:	CHEMTREC: 1-800-424-9300
BUSINESS PHONE:	1-410-228-6400
	General MSDS Information: 1-713/868-0440
	Fax on Demand: 1-800/231-1366

2. COMPOSITION and INFORMATION ON INGREDIENTS

CHEMICAL NAME	CAS #	mole %	EXPOSURE LIMITS IN AIR					
			ACGIH		OSHA		NIOSH IDLH ppm	OTHER ppm
			TLV ppm	STEL ppm	PEL ppm	STEL ppm		
Oxygen	7782-44-7	0.0015 - 23.5%	There are no specific exposure limits for Oxygen. Oxygen levels should be maintained above 19.5%.					
Methane	74-82-8	0.0005 - 2.5%	There are no specific exposure limits for Methane. Methane is a simple asphyxiant (SA). Oxygen levels should be maintained above 19.5%.					
Hydrogen Sulfide	7783-06-4	0.001-0.025 %	10 (NIC = 5)	15	10 (Vacated 1989 PEL)	20 (ceiling); 50 (ceiling, 10 min. peak once per 8- hour shift 15 (vacated 1989 PEL)	100	NIOSH REL: STEL = 10 (ceiling) 10 minutes DFG-MAKs: TWA = 10 PEAK = 2•MAK, 10 min., momentary value
Carbon Monoxide	630-08-0	0.0005 - 1.0%	25	NE	50 35 (Vacated 1989 PEL)	200 [ceiling] (Vacated 1989 PEL)	1200	NIOSH RELS: TWA = 35 STEL = 200 (ceiling) DFG MAKs: TWA = 30 PEAK = 2•MAK, 15 min., average value DFG MAK Pregnancy Risk Classification: B
Nitrogen	7727-37-9	Balance	There are no specific exposure limits for Nitrogen. Nitrogen is a simple asphyxiant (SA). Oxygen levels should be maintained above 19.5%.					

NE = Not Established. NIC = Notice of Intended Change See Section 16 for Definitions of Terms Used.
NOTE (1): ALL WHMIS required information is included in appropriate sections based on the ANSI Z400.1-1998 format. This gas mixture has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

3. HAZARD IDENTIFICATION

EMERGENCY OVERVIEW: This gas mixture is a colorless gas which has a rotten-egg odor (due to the presence of Hydrogen Sulfide). The odor cannot be relied on as an adequate warning of the presence of this gas mixture, because olfactory fatigue occurs after over-exposure to Hydrogen Sulfide. Hydrogen Sulfide and Carbon Monoxide (another component of this gas mixture) are toxic to humans in relatively low concentrations. Over-exposure to this gas mixture can cause skin or eye irritation, nausea, dizziness, headaches, collapse, unconsciousness, coma, and death. Additionally, releases of this gas mixture may produce oxygen-deficient atmospheres (especially in small confined spaces or other poorly-ventilated environments); individuals in such atmospheres may be asphyxiated.

SYMPTOMS OF OVER-EXPOSURE BY ROUTE OF EXPOSURE: The most significant route of over-exposure for this gas mixture is by inhalation.

INHALATION: Due to the small size of an individual cylinder of this gas mixture, no unusual health effects from over-exposure to the product are anticipated under routine circumstances of use. A potential health hazard associated with this gas mixture is the potential of inhalation of Hydrogen Sulfide, a component of this gas mixture. Such over-exposures may occur if this gas mixture is used in a confined space or other poorly-ventilated area. Over-exposures to Hydrogen Sulfide can cause dizziness, headache, and nausea. Over-exposure to this gas could result in respiratory arrest, coma, or unconsciousness, due to the presence of Hydrogen Sulfide. Continuous inhalation of low concentrations of Hydrogen Sulfide may cause olfactory fatigue, so that the odor is no longer an effective warning of the presence of this gas. A summary of exposure concentrations and observed effects are as follows:

CONCENTRATION OF HYDROGEN SULFIDE

0.3-30 ppm
50 ppm
Slightly higher than 50 ppm
100-150 ppm
200-250 ppm

300-500
500 ppm

> 600 ppm
> 1000 ppm

NOTE:

here are presented to delineate the complete health effects which have been observed for humans after exposure to Hydrogen Sulfide.

OBSERVED EFFECT

Odor is unpleasant.
Eye irritation. Dryness and irritation of nose, throat.
Irritation of the respiratory system.
Temporary loss of smell.
Headache, vomiting nausea. Prolonged exposure may lead to lung damage. Exposures of 4-8 hours can be fatal.
Swifter onset of symptoms. Death occurs in 1-4 hours.
Headache, excitement, staggering, and stomach ache after brief exposure. Death occurs within 0.5 - 1 hour of exposure.
Rapid onset of unconsciousness, coma, death.
Immediate respiratory arrest.

This gas mixture contains a maximum of 250 ppm Hydrogen Sulfide. The higher concentration values here are presented to delineate the complete health effects which have been observed for humans after exposure to Hydrogen Sulfide.

HAZARDOUS MATERIAL IDENTIFICATION SYSTEM

HEALTH HAZARD	(BLUE)	3
----------------------	--------	---

FLAMMABILITY HAZARD	(RED)	0
----------------------------	-------	---

PHYSICAL HAZARD	(YELLOW)	0
------------------------	----------	---

PROTECTIVE EQUIPMENT

EYES	RESPIRATORY	HANDS	BODY
See Section 8			

For Routine Industrial Use and Handling Applications

3. HAZARD IDENTIFICATION (continued)

Inhalation over-exposures to atmospheres containing more than the Threshold Limit Value of Carbon Monoxide (25 ppm), another component of this gas mixture, can result in serious health consequences. Carbon Monoxide is classified as a chemical asphyxiant, producing a toxic action by combining with the hemoglobin of the blood and replacing the available oxygen. Through this replacement, the body is deprived of the required oxygen, and asphyxiation occurs. Since the affinity of Carbon Monoxide for hemoglobin is about 200-300 times that of oxygen, only a small amount of Carbon Monoxide will cause a toxic reaction to occur. Carbon Monoxide exposures in excess of 50 ppm will produce symptoms of poisoning if breathed for a sufficiently long time. If this gas mixture is released in a small, poorly ventilated area (i.e. an enclosed or confined space), symptoms which may develop include the following:

CONCENTRATION OF CARBON MONOXIDE

All exposure levels:

200 ppm:
400 ppm:
1,000 -2000 ppm:

200-2500 ppm:

>2500 ppm:

Additionally, if mixtures of this gas mixture contain less than 19.5% Oxygen and are released in a small, poorly ventilated area (i.e. an enclosed or confined space), an oxygen-deficient environment may occur. Individuals breathing such an atmosphere may experience symptoms which include headaches, ringing in ears, dizziness, drowsiness, unconsciousness, nausea, vomiting, and depression of all the senses. Under some circumstances of over-exposure, death may occur. The following effects associated with various levels of oxygen are as follows:

CONCENTRATION OF OXYGEN

12-16% Oxygen:

10-14% Oxygen:

6-10% Oxygen:

Below 6%:

OBSERVED EFFECT

Over-exposure to Carbon Monoxide can be indicated by the lips and fingernails turning bright red.

Slight symptoms (i.e. headache) after several hours of exposure.

Headache and discomfort experienced within 2-3 hours of exposure.

Within 30 minutes, slight palpitations of the heart occurs. Within 1.5 hours, there is a tendency to stagger.

Within 2 hours, there is mental confusion, headaches, and nausea. Unconsciousness within 30 minutes.

Potential for collapse and death before warning symptoms.

OBSERVED EFFECT

Breathing and pulse rate increased, muscular coordination slightly disturbed.

Emotional upset, abnormal fatigue, disturbed respiration.

Nausea, vomiting, collapse, or loss of consciousness.

Convulsive movements, possible respiratory collapse, and death.

SKIN and EYE CONTACT: Hydrogen Sulfide, a component of this gas mixture, may be irritating to the skin. Inflammation and irritation of the eyes can occur at very low airborne concentration of Hydrogen Sulfide (less than 10 ppm). Exposure over several hours may result in "gas eyes" or "sore eyes" with symptoms of scratchiness, irritation, tearing and burning. Above 50 ppm of Hydrogen Sulfide, there is an intense tearing, blurring of vision, and pain when looking at light. Over-exposed individuals may see rings around bright lights. Most symptoms disappear when exposure ceases. However, in serious cases, the eye can be permanently damaged.

HEALTH EFFECTS OR RISKS FROM EXPOSURE: An Explanation in Lay Terms. Over-exposure to this gas mixture may cause the following health effects:

ACUTE: Due to the small size of the individual cylinder of this gas mixture, no unusual health effects from exposure to the product are anticipated under routine circumstances of use. However the Hydrogen Sulfide and Carbon Monoxide components of this gas mixture are toxic to humans. Over-exposure to this gas mixture can cause nausea, dizziness, headaches, collapse, unconsciousness, coma, and death. Due to the presence of Hydrogen Sulfide, over-exposures to this gas mixture can also irritate the skin and eyes; severe eye contamination can result in blindness.

CHRONIC: Severe over-exposures to the Hydrogen Sulfide component of this gas mixture, which do not result in death, may cause long-term symptoms such as memory loss, paralysis of facial muscles, or nerve tissue damage. In serious cases of over-exposure, the eyes can be permanently damaged. Skin disorders and respiratory conditions may be aggravated by repeated over-exposures to this gas product. Refer to Section 11 (Toxicology Information) for additional information on the components of this gas mixture. Chronic exposure to oxygen-deficient atmospheres (below 18% oxygen in air) may affect the heart and nervous system.

TARGET ORGANS: ACUTE: Respiratory system, blood system, central nervous system effects, cardiovascular system, skin, eyes. CHRONIC: Neurological system, reproductive system, eyes.

4. FIRST-AID MEASURES

RESCUERS SHOULD NOT ATTEMPT TO RETRIEVE VICTIMS OF EXPOSURE TO THIS GAS MIXTURE WITHOUT ADEQUATE PERSONAL PROTECTIVE EQUIPMENT. At a minimum, **Self-Contained Breathing Apparatus must be worn.** Victim(s) who experience any adverse effect after over-exposure to this gas mixture must be taken for medical attention. Rescuers should be taken for medical attention if necessary. Take a copy of the label and the MSDS to physician or other health professional with victim(s).

No unusual health effects are anticipated after exposure to this gas mixture, due to the small cylinder size. If any adverse symptom develops after over-exposure to this gas mixture, remove victim(s) to fresh air as quickly as possible. Only trained personnel should administer supplemental oxygen and/or cardio-pulmonary resuscitation if necessary.

SKIN EXPOSURE: If irritation of the skin develops after exposure to this gas mixture, immediately begin decontamination with running water. Minimum flushing is for 15 minutes. Remove exposed or contaminated clothing, taking care not to contaminate eyes. Victim must seek immediate medical attention.

EYE EXPOSURE: If irritation of the eye develops after exposure to this gas mixture, open victim's eyes while under gentle running water. Use sufficient force to open eyelids. Have victim "roll" eyes. Minimum flushing is for 15 minutes. Seek medical assistance immediately, preferably an ophthalmologist.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Pre-existing respiratory conditions may be aggravated by over-exposure to this gas mixture. Carbon Monoxide, a component of this gas mixture, can aggravate some diseases of the cardiovascular system, such as coronary artery disease and angina pectoris. Because of the presence of Hydrogen Sulfide, eye disorders or skin problems may be aggravated by over-exposure to this gas mixture.

RECOMMENDATIONS TO PHYSICIANS: Treat symptoms and eliminate over-exposure. Hyperbaric oxygen is the most efficient antidote to Carbon Monoxide poisoning, the optimum range being 2-2.5 atm. A special mask, or, preferably, a compression chamber to utilize oxygen at these pressures is required. Avoid administering stimulant drugs. Be observant for initial signs of pulmonary edema in the event of severe inhalation over-exposures.

5. FIRE-FIGHTING MEASURES

FLASH POINT: Not applicable.

AUTOIGNITION TEMPERATURE: Not applicable.

FLAMMABLE LIMITS (in air by volume, %):

Lower (LEL): Not applicable.

Upper (UEL): Not applicable.

FIRE EXTINGUISHING MATERIALS: Non-flammable gas mixture. Use extinguishing media appropriate for surrounding fire.


UNUSUAL FIRE AND EXPLOSION HAZARDS: This gas mixture contains toxic gases, Hydrogen Sulfide and Carbon Monoxide, and presents a health hazard to firefighters. This gas mixture is not flammable; however, containers, when involved in fire, may rupture or burst in the heat of the fire.

Explosion Sensitivity to Mechanical Impact: Not Sensitive.

Explosion Sensitivity to Static Discharge: Not Sensitive.

SPECIAL FIRE-FIGHTING PROCEDURES: Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment.

NFPA RATING

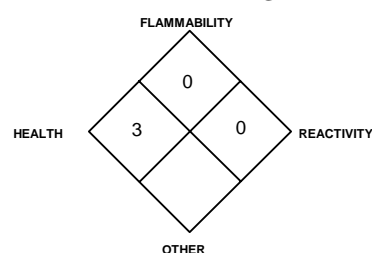

6. ACCIDENTAL RELEASE MEASURES

LEAK RESPONSE: Due to the small size and content of the cylinder, an accidental release of this gas mixture presents significantly less risk of over-exposure to Hydrogen Sulfide and Carbon Monoxide, the toxic components of this gas mixture, and other safety hazards related to the remaining components of this gas mixture, than a similar release from a larger cylinder. However, as with any chemical release, extreme caution must be used during emergency response procedures. In the event of a release in which the atmosphere is unknown, and in which other chemicals are potentially involved, evacuate immediate area. Such releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a leak, clear the affected area, protect people, and respond with trained personnel. For emergency disposal,

6. ACCIDENTAL RELEASE MEASURES (continued)

secure the cylinder and slowly discharge the gas to the atmosphere in a well-ventilated area or outdoors. Allow the gas mixture to dissipate. If necessary, monitor the surrounding area (and the original area of the release) for Hydrogen Sulfide, Carbon Monoxide, and Oxygen. Hydrogen Sulfide and Carbon Monoxide level must be below exposure level listed in Section 2 (Composition and Information on Ingredients) and Oxygen levels must be above 19.5% before non-emergency personnel are allowed to re-enter area. If leaking incidentally from the cylinder, contact your supplier.

7. HANDLING and USE

WORK PRACTICES AND HYGIENE PRACTICES: Be aware of any signs of dizziness or fatigue, especially if work is done in a poorly ventilated area; exposures to fatal concentrations of this gas mixture could occur without any significant warning symptoms, due to olfactory fatigue or oxygen deficiency. Do not attempt to repair, adjust, or in any other way modify cylinders containing a gas mixture with Hydrogen Sulfide or Carbon Monoxide. If there is a malfunction or another type of operational problem, contact nearest distributor immediately. Eye wash stations/safety showers should be near areas where this gas mixture is used or stored. All work operations should be monitored in such a way that emergency personnel can be immediately contacted in the event of a release. All work practices should minimize releases of Hydrogen Sulfide and Carbon Monoxide-containing gas mixtures.

STORAGE AND HANDLING PRACTICES: Cylinders should be firmly secured to prevent falling or being knocked-over. Cylinders must be protected from the environment, and preferably kept at room temperature (approximately 21°C (70°F)). Cylinders should be stored in dry, well-ventilated areas, away from sources of heat, ignition, and direct sunlight. Protect cylinders against physical damage. Full and empty cylinders should be segregated. Use a first-in, first-out inventory system to prevent full containers from being stored for long periods of time. These cylinders are not refillable. **WARNING! Do not refill DOT 39 cylinders. To do so may cause personal injury or property damage.**

SPECIAL PRECAUTIONS FOR HANDLING GAS CYLINDERS: WARNING! Compressed gases can present significant safety hazards. During cylinder use, use equipment designed for these specific cylinders. Ensure all lines and equipment are rated for proper service pressure.

PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT: Follow practices indicated in Section 6 (Accidental Release Measures). Make certain that application equipment is locked and tagged-out safely. Always use product in areas where adequate ventilation is provided.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

VENTILATION AND ENGINEERING CONTROLS: No special ventilation systems or engineering controls are needed under normal circumstances of use. As with all chemicals, use this gas mixture in well-ventilated areas. If this gas mixture is used in a poorly-ventilated area, install automatic monitoring equipment to detect the levels of Oxygen, Hydrogen Sulfide, and Carbon Monoxide.

RESPIRATORY PROTECTION: No special respiratory protection is required under normal circumstances of use. Use supplied air respiratory protection if the levels of components exceeds exposure limits presented in Section 2 (Composition and Information of Ingredients) and Oxygen levels are below 19.5%, or unknown, during emergency response to a release of this gas mixture. If respiratory protection is needed, use only protection authorized in the U.S. Federal OSHA Standard (29 CFR 1910.134), applicable U.S. State regulations, or the Canadian CSA Standard Z94.4-93 and applicable standards of Canadian Provinces. Oxygen levels below 19.16.33% are considered IDLH by OSHA. In such atmospheres, use of a full-facepiece pressure/demand SCBA or a full facepiece, supplied air respirator with auxiliary self-contained air supply is required under OSHA's Respiratory Protection Standard (1910.134-1998). The following NIOSH respiratory protection recommendations for Hydrogen Sulfide and Carbon Monoxide are provided for further information.

NIOSH/OSHA RECOMMENDATIONS FOR HYDROGEN SULFIDE CONCENTRATIONS IN AIR:

Up to 100 ppm: Powered air-purifying respirator with cartridge(s) to protect against hydrogen sulfide; gas mask with canister to protect against hydrogen sulfide; or SAR; or full-facepiece SCBA.

Emergency or Planned Entry into Unknown Concentration or IDLH Conditions: Positive pressure, full-facepiece SCBA; or positive pressure, full-facepiece SAR with an auxiliary positive pressure SCBA.

Escape: Gas mask with canister to protect against hydrogen sulfide; or escape-type SCBA

NOTE: The IDLH concentration for Hydrogen Sulfide is 100 ppm.

NIOSH/OSHA RECOMMENDATIONS FOR CARBON MONOXIDE CONCENTRATIONS IN AIR:

Up to 350 ppm Supplied Air Respirator (SAR)

Up to 875 ppm Supplied Air Respirator (SAR) operated in a continuous flow mode.

Up to 1200 ppm Gas mask with canister to protect against carbon monoxide; or full-facepiece SCBA; or full-facepiece Supplied Air Respirator (SAR).

Emergency or Planned Entry into Unknown Concentration or IDLH Conditions: Positive pressure, full-facepiece SCBA; or positive pressure, full-facepiece Supplied Air Respirator (SAR) with an auxiliary positive pressure SCBA.

Escape: Gas mask with canister to protect against carbon monoxide; or escape-type SCBA.

NOTE: End of Service Life Indicator (ESLI) required for gas masks.

NOTE: The IDLH concentration for Carbon Monoxide is 1200 ppm.

EYE PROTECTION: Safety glasses. If necessary, refer to U.S. OSHA 29 CFR 1910.133 or appropriate Canadian Standards.

HAND PROTECTION: Wear leather gloves when handling cylinders. Chemically resistant gloves should be worn when using this gas mixture. If necessary, refer to U.S. OSHA 29 CFR 1910.138 or appropriate Standards of Canada.

BODY PROTECTION: No special protection is needed under normal circumstances of use. If a hazard of injury to the feet exists due to falling objects, rolling objects, where objects may pierce the soles of the feet or where employee's feet may be exposed to electrical hazards, use foot protection, as described in U.S. OSHA 29 CFR 1910.136.

9. PHYSICAL and CHEMICAL PROPERTIES

The following information is for Nitrogen, the main component of this gas mixture.

GAS DENSITY @ 32°F (0°C) and 1 atm: .072 lbs/ ft³ (1.153 kg/m³)

FREEZING/MELTING POINT @ 10 psig: -345.8°F (-210°C)

SPECIFIC GRAVITY (air = 1) @ 70°F (21.1°C): 0.906

SOLUBILITY IN WATER vol/vol @ 32°F (0°C) and 1 atm: 0.023

EVAPORATION RATE (nBuAc = 1): Not applicable.

VAPOR PRESSURE @ 70°F (21.1°C) (psig): Not applicable.

COEFFICIENT WATER/OIL DISTRIBUTION: Not applicable.

BOILING POINT: -320.4°F (-195.8°C)

pH: Not applicable.

MOLECULAR WEIGHT: 28.01

EXPANSION RATIO: Not applicable.

SPECIFIC VOLUME (ft³/lb): 13.8

The following information is for this gas mixture.

ODOR THRESHOLD: 0.13 ppm (Hydrogen Sulfide)

APPEARANCE AND COLOR: This gas mixture is a colorless gas which has a rotten egg-like odor, due to the presence of Hydrogen Sulfide.

HOW TO DETECT THIS SUBSTANCE (warning properties): Continuous inhalation of low concentrations of this gas mixture may cause olfactory fatigue, due to the presence of Hydrogen Sulfide, so the odor is not a good warning property of a release of this gas mixture. In terms of leak detection, fittings and joints can be painted with a soap solution to detect leaks, which will be indicated by a bubble formation. Wet lead acetate paper can be used for leak detection. The paper turns black in the presence of Hydrogen Sulfide. Cadmium chloride solutions can also be used. Cadmium solutions will turn yellow upon contact with Hydrogen Sulfide.

10. STABILITY and REACTIVITY

STABILITY: Normally stable in gaseous state.

DECOMPOSITION PRODUCTS: The thermal decomposition products of Methane include carbon oxides. The decomposition products of Hydrogen Sulfide include water and sulfur oxides. The other components of this gas mixture do not decompose, per se, but can react with other compounds in the heat of a fire.

MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Titanium will burn in Nitrogen (the main component of this gas mixture). Lithium reacts slowly with Nitrogen at ambient temperatures. Components of this gas mixture (Hydrogen Sulfide, Methane) are also incompatible with strong oxidizers (i.e. chlorine, bromine pentafluoride, oxygen, oxygen difluoride, and nitrogen trifluoride). Carbon Monoxide is mildly corrosive to nickel and iron (especially at high temperatures and pressures). Hydrogen Sulfide is corrosive to most metals, because it reacts with these substances to form metal sulfides.

HAZARDOUS POLYMERIZATION: Will not occur.

CONDITIONS TO AVOID: Contact with incompatible materials. Cylinders exposed to high temperatures or direct flame can rupture or burst.

11. TOXICOLOGICAL INFORMATION

TOXICITY DATA: The following toxicology data are available for the components of this gas mixture:

NITROGEN:

There are no specific toxicology data for Nitrogen. Nitrogen is a simple asphyxiant, which acts to displace oxygen in the environment.

METHANE:

There are no specific toxicology data for Methane. Methane is a simple asphyxiant, which acts to displace oxygen in the environment.

CARBON MONOXIDE:

LC₅₀ (Inhalation-Rat) 1807 ppm/4 hours
 LC₅₀ (Inhalation-Mouse) 2444 ppm/4 hours
 LC₅₀ (Inhalation-Guinea Pig) 5718 ppm/4 hours
 LC₅₀ (Inhalation-wild bird species) 1334 ppm
 LCLo (Inhalation-Human) 4 mg/m³/12 hours:
 Behavioral: coma; Vascular: BP lowering not characterized in autonomic section; Blood: methemoglobinemia-carboxyhemoglobin
 LCLo (Inhalation-Man) 4000 ppm/30 minutes
 LCLo (Inhalation-Human) 5000 ppm/5 minutes
 LCLo (Inhalation-Dog) 4000 ppm/46 minutes
 LCLo (Inhalation-Rabbit) 4000 ppm
 LCLo (Inhalation-Mammal-species unspecified) 5000 ppm/5 minutes
 TCLo (Inhalation-Human) 600 mg/m³/10 minutes:
 Behavioral: headache
 TCLo (Inhalation-Man) 650 ppm/45 minutes: Blood: methemoglobinemia-carboxyhemoglobin; Behavioral: changes in psychophysiological tests
 TCLo (Inhalation-Rat) 1800 ppm/1 hour/14 days-intermittent: Cardiac: other changes
 TCLo (Inhalation-Rat) 30 mg/m³/8 hours/10 weeks-intermittent: Brain and Coverings: other degenerative changes; Behavioral: muscle contraction or spasticity
 TCLo (Inhalation-Rat) 96 ppm/24 hours/90 days-continuous: Blood: pigmented or nucleated red blood cells, other changes
 TCLo (Inhalation-Rat) 250 ppm/5 hours/20 days-intermittent: Blood: pigmented or nucleated red blood cells, changes in other cell count (unspecified), changes in erythrocyte (RBC) count
 TDLo (Subcutaneous-Rat) 5983 mg/kg/18 weeks-intermittent: Blood: changes in serum composition (e.g. TP, bilirubin, cholesterol)
 TCLo (Inhalation-Monkey) 200 ppm/24 hours/90 days-continuous: Blood: pigmented or nucleated red blood cells, other changes
 TCLo (Inhalation-Rabbit) 200 mg/m³/3 hours/13 weeks-intermittent: Brain and Coverings: other degenerative changes; Cardiac: other changes; Blood: hemorrhage
 TCLo (Inhalation-Guinea Pig) 200 mg/m³/5 hours/30 weeks-continuous: Cardiac: arrhythmias (including changes in conduction), EKG changes not diagnostic of specified effects, pulse rate increase, without fall in BP

CARBON MONOXIDE (continued):

TCLo (Inhalation-Mouse) 50 ppm/30 days-intermittent: Lungs, Thorax, or Respiration: structural or functional change in trachea or bronchi
 TCLo (Inhalation-Guinea Pig) 200 mg/m³/5 hours/4 weeks-intermittent: Endocrine: hyperglycemia
 TCLo (Inhalation-Guinea Pig) 200 ppm/24 hours/90 days-continuous: Blood: pigmented or nucleated red blood cells, other changes
 TCLo (Inhalation-Rat) 75 ppm/24 hours: female 0-20 day(s) after conception: Reproductive: Maternal Effects: other effects; Effects on Newborn: behavioral
 TCLo (Inhalation-Rat) 150 ppm/24 hours: female 1-22 day(s) after conception: Reproductive: Specific Developmental Abnormalities: cardiovascular (circulatory) system
 TCLo (Inhalation-Rat) 150 ppm/24 hours: female 1-22 day(s) after conception: Reproductive: Effects on Newborn: growth statistics (e.g.%, reduced weight gain), behavioral
 TCLo (Inhalation-Rat) 1 mg/m³/24 hours: female 72 day(s) pre-mating: Reproductive: Maternal Effects: menstrual cycle changes or disorders, parturition; Fertility: female fertility index (e.g. # females pregnant per # sperm positive females; # females pregnant per # females mated)
 TCLo (Inhalation-Rat) 150 ppm/24 hours: female 0-20 day(s) after conception: Reproductive: Effects on Newborn: behavioral
 TCLo (Inhalation-Rat) 75 ppm/24 hours: female 0-20 day(s) after conception: Reproductive: Specific Developmental Abnormalities: immune and reticuloendothelial system
 TCLo (Inhalation-Mouse) 65 ppm/24 hours: female 7-18 day(s) after conception: Reproductive: Effects on Newborn: behavioral
 TCLo (Inhalation-Mouse) 250 ppm/7 hours: female 6-15 day(s) after conception: Reproductive: Fertility: post-implantation mortality (e.g. dead and/or resorbed implants per total number of implants); Specific Developmental Abnormalities: musculoskeletal system
 TCLo (Inhalation-Mouse) 125 ppm/24 hours: female 7-18 day(s) after conception: Reproductive: Effects on Embryo or Fetus: fetotoxicity (except death, e.g., stunted fetus)
 TCLo (Inhalation-Mouse) 8 pph/1 hour: female 8 day(s) after conception: Reproductive: Fertility: litter size (e.g. # fetuses per litter; measured before birth); Effects on Embryo or Fetus: fetotoxicity (except death, e.g., stunted fetus), fetal death

CARBON MONOXIDE (continued):

TCLo (Inhalation-Rabbit) 50 ppm/24 hours/8 weeks-continuous: Blood: changes in platelet count
 TCLo (Inhalation-Mouse) 8 pph/1 hour: female 8 day(s) after conception: Reproductive: Specific Developmental Abnormalities: Central Nervous System
 TCLo (Inhalation-Rabbit) 180 ppm/24 hours: female 1-30 day(s) after conception: Reproductive: Effects on Newborn: stillbirth, viability index (e.g., # alive at day 4 per # born alive)
 Micronucleus Test (Inhalation-Mouse) 1500 ppm/10 minutes
 Sister Chromatid Exchange (Inhalation-Mouse) 2500 ppm/10 minutes
HYDROGEN SULFIDE:
 LC₅₀ (Inhalation-Rat) 444 ppm: Lungs, Thorax, or Respiration: other changes; Gastrointestinal: hypermotility, diarrhea; Kidney, Ureter, Bladder: urine volume increased
 LC₅₀ (Inhalation-Mouse) 634 ppm/1 hour
 LCLo (Inhalation-Human) 600 ppm/30 minutes
 LCLo (Inhalation-Man) 5700 µg/kg: Behavioral: coma; Lungs, Thorax, or Respiration: chronic pulmonary edema
 LCLo (Inhalation-Human) 800 ppm/5 minutes
 LCLo (Inhalation-Mammal-species unspecified) 800 ppm/5 minutes
 TCLo (Inhalation-Rat) 30 ppm/6 hours/10 weeks-intermittent: Sense Organs and Special Senses (Olfaction): olfactory nerve change, effect, not otherwise specified
 TCLo (Inhalation-Rat) 1200 mg/m³/2 hours/5 days-intermittent: Brain and Coverings: other degenerative changes; Biochemical: Enzyme inhibition, induction, or change in blood or tissue levels: true cholinesterase
 TCLo (Inhalation-Rat) 100 ppm/8 hours/5 weeks-intermittent: Brain and Coverings: other degenerative changes; Lungs, Thorax, or Respiration: other changes; Biochemical: Enzyme inhibition, induction, or change in blood or tissue levels: cytochrome oxidases (including oxidative phosphorylation)
 TCLo (Inhalation-Rat) 80 ppm/6 hours/90 days-intermittent: Brain and Coverings: changes in brain weight; Nutritional and Gross Metabolic: weight loss or decreased weight gain
 TCLo (Inhalation-Rat) 20 ppm: female 6-22 day(s) after conception lactating female 21 day(s) post-birth: Reproductive: Effects on Newborn: physical
 TCLo (Inhalation-Mouse) 80 ppm/6 hours/90 days-intermittent: Nutritional and Gross Metabolic: weight loss or decreased weight gain; Related to Chronic Data: death
 TCLo (Inhalation-Rabbit) 40 mg/m³/5 hours/30 weeks-intermittent: Sense Organs and Special Senses (Eye): conjunctive irritation

SUSPECTED CANCER AGENT: The components of this gas mixture are not found on the following lists: FEDERAL OSHA Z LIST, NTP, CAL/OSHA, and IARC; therefore, they are not considered to be, nor suspected to be, cancer-causing agents by these agencies.

IRRITANCY OF PRODUCT: This gas mixture is irritating to the eyes, and may be irritating to the skin.

SENSITIZATION OF PRODUCT: The components of this gas mixture are not known to be skin or respiratory sensitizers.

REPRODUCTIVE TOXICITY INFORMATION: Listed below is information concerning the effects of this gas mixture on the human reproductive system.

Mutagenicity: The components of this gas mixture are not reported to cause mutagenic effects in humans.

REPRODUCTIVE TOXICITY INFORMATION (continued):

Embryotoxicity: This gas mixture contains components that may cause embryotoxic effects in humans; however, due to the small total amount of the components, embryotoxic effects are not expected to occur.

Teratogenicity: This gas mixture is not expected to cause teratogenic effects in humans due to the small cylinder size and small total amount of all components. The Carbon Monoxide component of this gas mixture which exists up to 1%, can cause teratogenic effects in humans. Severe exposure to Carbon Monoxide during pregnancy has caused adverse effects and the death of the fetus. In general, maternal symptoms are an indicator of the potential risk to the fetus since Carbon Monoxide is toxic to the mother before it is toxic to the fetus.

Reproductive Toxicity: The components of this gas mixture are not reported to cause adverse reproductive effects in humans.

A *mutagen* is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate through generation lines. An *embryotoxin* is a chemical which causes damage to a developing embryo (i.e. within the first eight weeks of pregnancy in humans), but the damage does not propagate across generational lines. A *teratogen* is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A *reproductive toxin* is any substance which interferes in any way with the reproductive process.

BIOLOGICAL EXPOSURE INDICES (BEIs): Biological Exposure Indices (BEIs) have been determined for components of this gas mixture, as follows:

CHEMICAL DETERMINANT	SAMPLING TIME	BEI
CARBON MONOXIDE • Carboxyhemoglobin in blood • Carbon monoxide in end-exhaled air	• End of shift • End of shift	• 3.5% of hemoglobin • 20 ppm

12. ECOLOGICAL INFORMATION

ENVIRONMENTAL STABILITY: The gas will be dissipated rapidly in well-ventilated areas. The following environmental data are applicable to the components of this gas mixture.

CARBON MONOXIDE:

Atmospheric Fate: A photochemical model was used to quantify the sensitivity of the tropospheric oxidants ozone (O₃) and OH to changes in methane (CH₄), Carbon Monoxide (CO), and NO emissions and to perturbations in climate and stratospheric chemistry. In most cases, increased CH₄ and CO emissions will suppress OH (negative coefficients) in increased O₃ (positive coefficients) except in areas where NO and O₃ influenced by pollution are sufficient to increase OH. In most regions, NO, CO, and CH₄ emission increased will suppress OH and increase O₃, but these trends may be opposed by stratospheric O₃ depletion and climate change.

HYDROGEN SULFIDE:

Water Solubility = 1 g/242 mL at 20°C.

Plant toxicity: Continuous fumigation of plants with 300 or 3000 ppb Hydrogen Sulfide caused leaf lesions, defoliation, and reduced growth with severity of injury correlated to dose. At higher (3.25 and 5.03 ppm) Hydrogen Sulfide, significant reductions in leaf CO₂ and water vapor exchanges occurred, and stomatal openings were depressed. When Hydrogen Sulfide gas was applied to 29 species of green plants for 5 hours, young, rapidly elongating tissues were more sensitive to injury than older tissues. Symptoms included scorching of young shoots and

12. ECOLOGICAL INFORMATION(continued)

leaves, basal and marginal scorching of older leaves. Mature leaves were unaffected. Seeds exposed to Hydrogen Sulfide gas showed delay in germination.

Persistence: Converts to elemental sulfur upon standing in water.

Major Species Threatened: Aquatic and animal life plants may be injured if exposed to 5 ppm in air over 24 hours.

Biodegradation: Microorganisms in soil and water are involved in oxidation-reduction reactions that oxidize hydrogen sulfide to elemental sulfur.

Members of the genera Beggiatoa, Thioploca, and Thiotrix function in transition zones between aerobic and anaerobic conditions where both molecular oxygen and hydrogen sulfide are found. Also, some photosynthetic bacteria oxidize hydrogen sulfide to elemental sulfur. Members of the families Chlorobiaceae and Chromatiaceae (purple sulfur bacteria) are obligate aerobes and are phototrophic, and are found in waters with high H₂S concentrations. The interactions of these organisms form part of the global sulfur cycle.

Bioconcentration: Does not have bioaccumulation or food chain contamination potential.

NITROGEN: Water Solubility = 2.4 volumes Nitrogen/100 volumes water at 0°C; 1.6 volumes Nitrogen/100 volumes water at 20°C.

EFFECT OF MATERIAL ON PLANTS or ANIMALS: No evidence is currently available on this gas mixture's effects on plant and animal life. Hydrogen Sulfide and Carbon Monoxide, components of this gas mixture, can be deadly to exposed animal life, producing symptoms similar to those experienced by humans. This gas mixture may also be harmful to plant life.

EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on this gas mixture's effects on aquatic life. The presence of more than a trace of the Carbon Monoxide component of this gas mixture is a hazard to fish. The following aquatic toxicity data are available for the Hydrogen Sulfide component of this gas mixture:

HYDROGEN SULFIDE:

LC₅₀ (*Asellus* arthropods) 96 hours = 0.111 mg/L

LC₅₀ (*Crangon* arthropods) 96 hours = 1.07 mg/L

LC₅₀ (*Gammarus* arthropods) 96 hours = 0.84 mg/L

LC₅₀ (Ephemera) 96 hours = 0.316 mg/L

LC₅₀ (Inhalation-Flies) > 960 minutes = 380 mg/m³

LC₅₀ (Inhalation-Flies) 7 minutes = 1,500 mg/m³

LC_{50,F} (bluegill, eggs) 72 hours = 0.0190 mg/L

HYDROGEN SULFIDE (continued):

LC_{50,F} (bluegill, 35-day-old fry) 96 hours = 0.0131 mg/L

LC_{50,F} (bluegill, juveniles) 96 hours = 0.0478 mg/L

LC_{50,F} (bluegill, adults) 96 hours = 0.0448 mg/L

LC_{50,F} (fathead minnows) 96 hours = 0.0071-0.55 mg/L

LC_{50,F} (bluegill) 96 hours = 0.0090-0.0140 mg/L

LC_{50,F} (brook trout) 96 hours = 0.0216-0.0308 mg/L

Toxic (goldfish) = 100 mg/L

HYDROGEN SULFIDE (continued):

Lethal (goldfish) 96 hours = 10 mg/L

Toxic (carp) 24 hours = 3.3 mg/L

Toxic (goldfish) 24 hours = 4.3 mg/L

Toxic (sunfish) 1 hour = 4.9 to 5.3 mg/L

Toxic (minnows) 24 hours = 5-6 mg/L

Toxic (carp) 24 hours = 6-25 mg/L

Toxic (trout) 15 minutes = 10 mg/L

Toxic (goldfish) 24 hours = 25 mg/L

Toxic (tench) 3 hours = 100 mg/L

MATC,F (fathead minnows) 0.0037 mg/L

MATC,F (bluegill) 0.0004 mg/L

MATC,F (brook trout) 0.055 mg/L

13. DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL PREPARING WASTES FOR DISPOSAL: Waste disposal must be in accordance with appropriate Federal, State, and local regulations. Cylinders with undesired residual product may be safely vented outdoors with the proper regulator. For further information, refer to Section 16 (Other Information).

14. TRANSPORTATION INFORMATION

THIS GAS MIXTURE IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

PROPER SHIPPING NAME: Compressed gases, n.o.s. (*Oxygen, Nitrogen)* or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not Applicable

DOT LABEL(S) REQUIRED: Non-Flammable Gas

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

U.S. DEPARTMENT OF TRANSPORTATION INFORMATION (continued):

MARINE POLLUTANT: The components of this gas mixture are not classified by the DOT as Marine Pollutants (as defined by 49 CFR 172.101, Appendix B).

SPECIAL SHIPPING INFORMATION: Cylinders should be transported in a secure position, in a well-ventilated vehicle. The transportation of compressed gas cylinders in automobiles or in closed-body vehicles can present serious safety hazards. If transporting these cylinders in vehicles, ensure these cylinders are not exposed to extremely high temperatures (as may occur in an enclosed vehicle on a hot day). Additionally, the vehicle should be well-ventilated during transportation.

Note: DOT 39 Cylinders ship in a strong outer carton (overpack). Pertinent shipping information goes on the outside of the overpack. DOT 39 Cylinders do not have transportation information on the cylinder itself.

TRANSPORT CANADA TRANSPORTATION OF DANGEROUS GOODS REGULATIONS: This gas mixture is considered as Dangerous Goods, per regulations of Transport Canada.

PROPER SHIPPING NAME: Compressed gases, n.o.s. (*Oxygen, Nitrogen)* or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not Applicable

HAZARD LABEL: Class 2.2 (Non-Flammable Gas)

SPECIAL PROVISIONS: None

EXPLOSIVE LIMIT AND LIMITED QUANTITY INDEX: 0.12

ERAP INDEX: 3000

PASSENGER CARRYING SHIP INDEX: Forbidden

PASSENGER CARRYING ROAD VEHICLE OR PASSENGER CARRYING RAILWAY VEHICLE INDEX: Forbidden

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

NOTE: Shipment of compressed gas cylinders via Public Passenger Road Vehicle is a violation of Canadian law (Transport Canada Transportation of Dangerous Goods Act, 1992).

15. REGULATORY INFORMATION

ADDITIONAL U.S. REGULATIONS:

U.S. SARA REPORTING REQUIREMENTS: This gas mixture is subject to the reporting requirements of Sections 302, 304, and 313 of Title III of the Superfund Amendments and Reauthorization Act, as follows:

CHEMICAL NAME	SARA 302 (40 CFR 355, Appendix A)	SARA 304 (40 CFR Table 302.4)	SARA 313 (40 CFR 372.65)
Hydrogen Sulfide	YES	YES	YES

U.S. SARA THRESHOLD PLANNING QUANTITY: Hydrogen Sulfide = 500 lb (227 kg)

U.S. TSCA INVENTORY STATUS: The components of this gas mixture are listed on the TSCA Inventory.

U.S. CERCLA REPORTABLE QUANTITY (RQ): Hydrogen Sulfide = 100 lb (45 kg)

OTHER U.S. FEDERAL REGULATIONS:

- Hydrogen Sulfide and Carbon Monoxide are subject to the reporting requirements of CFR 29 1910.1000.
- Hydrogen Sulfide and Methane are subject to the reporting requirements of Section 112(r) of the Clean Air Act. The Threshold Quantity for each of these gases is 10,000 pounds and so this mixture will not be affected by the regulation.
- Depending on specific operations involving the use of this gas mixture, the regulations of the Process Safety Management of Highly Hazardous Chemicals may be applicable (29 CFR 1910.119). Hydrogen Sulfide is listed in Appendix A of this regulation. The Threshold Quantity for Hydrogen Sulfide under this regulation is 1500 lbs (and so one cylinder of this gas mixture will not be affected by this regulation).
- This gas mixture does not contain any Class I or Class II ozone depleting chemicals (40 CFR part 82).
- Nitrogen and Oxygen are not listed Regulated Substances, per 40 CFR, Part 68, of the Risk Management for Chemical Releases. Hydrogen Sulfide is listed under this regulation in Table 1 as a Regulated Substance (Toxic Substance), in quantities of 10,000 lbs (4,553 kg) or greater.

15. REGULATORY INFORMATION(continued)

Carbon Monoxide and Methane are listed under this regulation in Table 3, as Regulated Substances (Flammable), in quantities of 10,000 lbs (4,553 kg) or greater, and so this mixture will not be affected by the regulation.

U.S. STATE REGULATORY INFORMATION: The components of this gas mixture are covered under the following specific State regulations:

Alaska - Designated Toxic and Hazardous Substances: Carbon Monoxide, Hydrogen Sulfide, Methane.	Michigan - Critical Materials Register: No.	Pennsylvania - Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Hydrogen Sulfide, Methane.
California - Permissible Exposure Limits for Chemical Contaminants: Carbon Monoxide, Nitrogen, Hydrogen Sulfide, Methane.	Minnesota - List of Hazardous Substances: Carbon Monoxide, Hydrogen Sulfide, Methane.	Rhode Island - Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Hydrogen Sulfide, Methane.
Florida - Substance List: Oxygen, Carbon Monoxide, Hydrogen Sulfide	Missouri - Employer Information/Toxic Substance List t: Hydrogen Sulfide, Methane.	Texas - Hazardous Substance List: Hydrogen Sulfide.
Illinois - Toxic Substance List: Carbon Monoxide, Methane, Hydrogen Sulfide.	New Jersey - Right to Know Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Methane.	West Virginia - Hazardous Substance List: Hydrogen Sulfide.
Kansas - Section 302/313 List: No.	North Dakota - List of Hazardous Chemicals, Reportable Quantities: Hydrogen Sulfide.	Wisconsin - Toxic and Hazardous Substances: Hydrogen Sulfide
Massachusetts - Substance List: Oxygen, Carbon Monoxide, Hydrogen Sulfide, Methane.		

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): The Carbon Monoxide component of this gas mixture is on the California Proposition 65 lists. WARNING! This gas mixture contains a compound known to the State of California to cause birth defects or other reproductive harm.

ADDITIONAL CANADIAN REGULATIONS:

CANADIAN DSL/NDSL INVENTORY STATUS: The components of this gas mixture are listed on the DSL Inventory.

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA) PRIORITIES SUBSTANCES LISTS: The components of this gas mixture are not on the CEPA Priorities Substances Lists.

CANADIAN WHMIS CLASSIFICATION: This gas mixture is categorized as a Controlled Product, Hazard Classes A and D2A, as per the Controlled Product Regulations.

16. OTHER INFORMATION

INFORMATION ABOUT DOT-39 NRC (Non-Refillable Cylinder) PRODUCTS

DOT 39 cylinders ship as hazardous materials when full. Once the cylinders are relieved of pressure (empty) they are not considered hazardous material or waste. Residual gas in this type of cylinder is not an issue because toxic gas mixtures are prohibited. Calibration gas mixtures typically packaged in these cylinders are Nonflammable n.o.s., UN 1956. A small percentage of calibration gases packaged in DOT 39 cylinders are flammable or oxidizing gas mixtures.

For disposal of used DOT-39 cylinders, it is acceptable to place them in a landfill if local laws permit. Their disposal is no different than that employed with other DOT containers such as spray paint cans, household aerosols, or disposable cylinders of propane (for camping, torch etc.). When feasible, we recommended recycling for scrap metal content. CALGAZ will do this for any customer that wishes to return cylinders to us prepaid. All that is required is a phone call to make arrangements so we may anticipate arrival. Scrapping cylinders involves some preparation before the metal dealer may accept them. We perform this operation as a service to valued customers who want to participate.

MIXTURES: When two or more gases or liquefied gases are mixed, their hazardous properties may combine to create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an Industrial Hygienist or other trained person when you make your safety evaluation of the end product. Remember, gases and liquids have properties which can cause serious injury or death.

Further information about the handling of compressed gases can be found in the following pamphlets published by: Compressed Gas Association Inc. (CGA), 1725 Jefferson Davis Highway, Suite 1004, Arlington, VA 22202-4102. Telephone: (703) 412-0900.

P-1 "Safe Handling of Compressed Gases in Containers"
AV-1 "Safe Handling and Storage of Compressed Gases"
"Handbook of Compressed Gases"

PREPARED BY: CHEMICAL SAFETY ASSOCIATES, Inc.
PO Box 3519, La Mesa, CA 91944-3519
619/670-0609

Fax on Demand: 1-800/231-1366



This Material Safety Data Sheet is offered pursuant to OSHA's Hazard Communication Standard, 29 CFR, 1910.1200. Other government regulations must be reviewed for applicability to this gas mixture. To the best of CALGAZ knowledge, the information contained herein is reliable and accurate as of this date; however, accuracy, suitability or completeness are not guaranteed and no warranties of any type, either express or implied, are provided. The information contained herein relates only to this specific product. If this gas mixture is combined with other materials, all component properties must be considered. Data may be changed from time to time. Be sure to consult the latest edition.

SAFETY DATA SHEET

Helium

Section 1. Identification

GHS product identifier	: Helium
Chemical name	: Helium
Other means of identification	: helium (dot); Helium-4; He; o-Helium; UN 1046
Product use	: Synthetic/Analytical chemistry.
Synonym	: helium (dot); Helium-4; He; o-Helium; UN 1046
SDS #	: 001025
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253
Emergency telephone number (with hours of operation)	: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status : This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : GASES UNDER PRESSURE - Compressed gas

GHS label elements

Hazard pictograms :



Signal word : Warning

Hazard statements : Contains gas under pressure; may explode if heated.
May displace oxygen and cause rapid suffocation.

Precautionary statements

General : Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction.

Prevention : Use and store only outdoors or in a well ventilated place.

Response : Not applicable.

Storage : Protect from sunlight. Protect from sunlight when ambient temperature exceeds 52°C/125°F. Store in a well-ventilated place.

Disposal : Not applicable.

Hazards not otherwise classified : In addition to any other important health or physical hazards, this product may displace oxygen and cause rapid suffocation.

Section 3. Composition/information on ingredients

Substance/mixture : Substance
Chemical name : Helium
Other means of identification : helium (dot); Helium-4; He; o-Helium; UN 1046

CAS number/other identifiers

CAS number : 7440-59-7
Product code : 001025

Ingredient name	%	CAS number
Helium	100	7440-59-7

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.

Inhalation : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Skin contact : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur. Wash clothing before reuse. Clean shoes thoroughly before reuse.

Ingestion : As this product is a gas, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : Contact with rapidly expanding gas may cause burns or frostbite.
Inhalation : No known significant effects or critical hazards.
Skin contact : Contact with rapidly expanding gas may cause burns or frostbite.
Frostbite : Try to warm up the frozen tissues and seek medical attention.
Ingestion : As this product is a gas, refer to the inhalation section.

Over-exposure signs/symptoms

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

Date of issue/Date of revision : 10/15/2014. **Date of previous issue** : 10/2/2014. **Version** : 0.02 2/11

Section 4. First aid measures

- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

Specific hazards arising from the chemical : Contains gas under pressure. In a fire or if heated, a pressure increase will occur and the container may burst or explode.

Hazardous thermal decomposition products : No specific data.

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Avoid contact with eyes, skin and clothing. Avoid breathing gas. Empty containers retain product residue and can be hazardous. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Keep container tightly closed and sealed until ready for use. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F).

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Helium	Oxygen Depletion [Asphyxiant]

- Appropriate engineering controls** : Good general ventilation should be sufficient to control worker exposure to airborne contaminants.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Section 8. Exposure controls/personal protection

- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Gas. [Compressed gas.]
- Color** : Colorless.
- Molecular weight** : 4 g/mole
- Molecular formula** : He
- Boiling/condensation point** : -268.9°C (-452°F)
- Melting/freezing point** : -272.2°C (-458°F)
- Critical temperature** : -267.9°C (-450.2°F)
- Odor** : Odorless.
- Odor threshold** : Not available.
- pH** : Not available.
- Flash point** : [Product does not sustain combustion.]
- Burning time** : Not applicable.
- Burning rate** : Not applicable.
- Evaporation rate** : Not available.
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.
- Vapor pressure** : Not available.
- Vapor density** : 0.14 (Air = 1) Liquid Density@BP: 7.8 lb/ft³ (125 kg/m³)
- Specific Volume (ft³/lb)** : 96.1538
- Gas Density (lb/ft³)** : 0.0104
- Relative density** : Not applicable.
- Solubility** : Not available.
- Solubility in water** : Not available.
- Partition coefficient: n-octanol/water** : 0.28
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.

Section 9. Physical and chemical properties

- SADT** : Not available.
Viscosity : Not applicable.

Section 10. Stability and reactivity

- Reactivity** : No specific test data related to reactivity available for this product or its ingredients.
- Chemical stability** : The product is stable.
- Possibility of hazardous reactions** : Under normal conditions of storage and use, hazardous reactions will not occur.
- Conditions to avoid** : No specific data.
- Hazardous decomposition products** : Under normal conditions of storage and use, hazardous decomposition products should not be produced.
- Hazardous polymerization** : Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Section 11. Toxicological information

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Contact with rapidly expanding gas may cause burns or frostbite.
Inhalation : No known significant effects or critical hazards.
Skin contact : Contact with rapidly expanding gas may cause burns or frostbite.
Ingestion : As this product is a gas, refer to the inhalation section.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
Potential delayed effects : Not available.

Long term exposure

- Potential immediate effects** : Not available.
Potential delayed effects : Not available.

Potential chronic health effects

Not available.

- General** : No known significant effects or critical hazards.
Carcinogenicity : No known significant effects or critical hazards.
Mutagenicity : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Section 12. Ecological information

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Helium	0.28	-	low

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1046	UN1046	UN1046	UN1046	UN1046
UN proper shipping name	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED
Transport hazard class(es)	2.2 	2.2 	2.2 	2.2 	2.2 
Packing group	-	-	-	-	-
Environment	No.	No.	No.	No.	No.
Additional information	<p>Limited quantity Yes.</p> <p>Packaging instruction Passenger aircraft Quantity limitation: 75 kg</p> <p>Cargo aircraft Quantity limitation: 150 kg</p>	<p>Explosive Limit and Limited Quantity Index 0.125</p> <p>Passenger Carrying Road or Rail Index 75</p>	-	-	<p>Passenger and Cargo Aircraft Quantity limitation: 75 kg</p> <p>Cargo Aircraft Only Quantity limitation: 150 kg</p>

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Section 14. Transport information

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
United States inventory (TSCA 8b): This material is listed or exempted.

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Sudden release of pressure

Composition/information on ingredients

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
Helium	100	No.	Yes.	No.	No.	No.

State regulations

Massachusetts : This material is listed.

New York : This material is not listed.

New Jersey : This material is listed.

Pennsylvania : This material is listed.

Canada inventory : This material is listed or exempted.

International regulations

Section 15. Regulatory information

International lists

- Australia inventory (AICS):** This material is listed or exempted.
- China inventory (IECSC):** This material is listed or exempted.
- Japan inventory:** Not determined.
- Korea inventory:** This material is listed or exempted.
- Malaysia Inventory (EHS Register):** Not determined.
- New Zealand Inventory of Chemicals (NZIoC):** This material is listed or exempted.
- Philippines inventory (PICCS):** This material is listed or exempted.
- Taiwan inventory (CSNN):** Not determined.

Chemical Weapons Convention List Schedule I Chemicals : Not listed

Chemical Weapons Convention List Schedule II Chemicals : Not listed

Chemical Weapons Convention List Schedule III Chemicals : Not listed

Canada

WHMIS (Canada) : Class A: Compressed gas.

CEPA Toxic substances: This material is not listed.

Canadian ARET: This material is not listed.

Canadian NPRI: This material is not listed.

Alberta Designated Substances: This material is not listed.

Ontario Designated Substances: This material is not listed.

Quebec Designated Substances: This material is not listed.

Section 16. Other information

Canada Label requirements : Class A: Compressed gas.

Hazardous Material Information System (U.S.A.)

Health	0
Flammability	0
Physical hazards	0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Section 16. Other information

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

History

Date of printing : 10/15/2014.

Date of issue/Date of revision : 10/15/2014.

Date of previous issue : 10/2/2014.

Version : 0.02

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United NationsACGIH – American Conference of Governmental Industrial Hygienists
- AIHA – American Industrial Hygiene Association
- CAS – Chemical Abstract Services
- CEPA – Canadian Environmental Protection Act
- CERCLA – Comprehensive Environmental Response, Compensation, and Liability Act (EPA)
- CFR – United States Code of Federal Regulations
- CPR – Controlled Products Regulations
- DSL – Domestic Substances List
- GWP – Global Warming Potential
- IARC – International Agency for Research on Cancer
- ICAO – International Civil Aviation Organisation
- Inh – Inhalation
- LC – Lethal concentration
- LD – Lethal dosage
- NDSL – Non-Domestic Substances List
- NIOSH – National Institute for Occupational Safety and Health
- TDG – Canadian Transportation of Dangerous Goods Act and Regulations
- TLV – Threshold Limit Value
- TSCA – Toxic Substances Control Act
- WEEL – Workplace Environmental Exposure Level
- WHMIS – Canadian Workplace Hazardous Material Information System

References : Not available.

▣ Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

MATERIAL SAFETY DATA SHEET
HORIBA INSTRUMENTS, INC.
17671 Armstrong Avenue, Irvine, CA 92614
(949) 250-4811

REVISION DATE MAY 2003

SECTION I: MATERIAL IDENTIFICATION

IDENTITY: Potassium hydrogen phthalate
P/N 350623, 527033, 696138-1, 9003001600, 100-4

CHEMICAL FORMULA: $C_6H_4(COOK)(COOH)$ ~1% in water

GENERIC NAME: pH 4 Buffer Solution

CHEMICAL FAMILY: Salt solution

OTHER DESIGNATION: pH 4 Standard Solution, Autocal solution, 100-4

IN CASE OF EMERGENCY CONTACT YOUR REGIONAL PLANT MANAGER

SECTION II: HAZARDOUS INGREDIENTS

Irritant: Eyes, nose and throat, skin.

This product contains the following toxic chemical(s) subject to Section 313
Title III reporting requirements (40 CFR Part 372): NONE

SECTION III: PHYSICAL DATA

MELTING POINT (*): 295-300 °C	SPECIFIC GRAVITY (H ₂ O = 1): 1.636
VAPOR PRESSURE: N/A	PERCENT, VOLATILE BY VOLUME (%): None
SOLUBILITY IN WATER v/v @°C: APPEARANCE AND ODOR:	1.2% (cool water) Colorless liquid
	CAS #: 877-24-7

SECTION IV: PHYSICAL DATA

FLASH POINT AND METHOD:	N/A
FLAMMABLE LIMITS:	None
EXTINGUISHING MEDIA:	Determine based on surrounding combustibles.
SPECIAL FIRE FIGHTING PROCEDURES:	None
UNUSUAL FIRE AND EXPLOSION HAZARDS:	N/A

SECTION V: REACTIVITY DATA

STABILITY: Stable at normal temperature

INCOMPATIBILITY (MATERIALS TO AVOID):	None
HAZARDOUS DECOMPOSITION PRODUCTS:	None
HAZARDOUS POLYMERIZATION:	None

SECTION VI: HEALTH HAZARD DATA

EMERGENCY AND FIRST AID PROCEDURES:

Eyes: Wash eyes with clean water flowing for 10-15 minutes. Call doctor immediately.
Skin: Take off contaminated clothing and wash skin with water.
Inhaled: Move the patient into clear air. Keep patient warm and stable. Loosen clothing and use artificial respiration if necessary. Call doctor immediately.
Swallowed: Give patient plenty of warm water/milk. Induce vomiting. Call doctor immediately. If patient is unconscious, do not give water/milk, but call doctor immediately.

SECTION VII: SPILL OR LEAK PROCEDURES Highway or railway spills call Chemtrec (800) 424-9300

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED:

Collect as much material as possible. The place of leakage should be washed with plenty of water.

WASTE DISPOSAL METHOD:

Dispose as chemical waste.

SECTION VIII: SPECIAL PROTECTION INFORMATION

RESPIRATORY PROTECTION (SPECIFY TYPE): Not normally required.

VENTILATION: Not normally required.

OTHER PROTECTIVE EQUIPMENT: Optional - eye mask, gloves and long-sleeve working clothes.

SECTION IX: SPECIAL PRECAUTIONS

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING:

After working, wash hands thoroughly.

OTHER PRECAUTIONS: None.

For the following RAE Part Numbers:

600-0001-000, 600-0002-000

600-0002-001, 600-0026-000

600-0027-000, 600-0069-000



MATERIAL SAFETY DATA SHEET

Prepared to U.S. OSHA, CMA, ANSI and Canadian WHMIS Standards

1. PRODUCT IDENTIFICATION

CHEMICAL NAME; CLASS: NONFLAMMABLE GAS MIXTURE

Containing One or More of the Following Components in a Nitrogen Balance Gas:

Oxygen 0-23.5%; Isobutylene, 0.0005-0.9%

SYNONYMS: Not Applicable

CHEMICAL FAMILY NAME: Not Applicable

FORMULA: Not Applicable

Document Number: 50054

Note: The Material Safety Data Sheet is for this gas mixture supplied in cylinders with 33 cubic feet (935 liters) or less gas capacity (DOT - 39 cylinders). This MSDS has been developed for various gas mixtures with the composition of components within the ranges listed in Section 2 (Composition and Information on Ingredients). Refer to the product label for information on the actual composition of the product.

PRODUCT USE:	Calibration of Monitoring and Research Equipment
SUPPLIER/MANUFACTURER'S NAME:	CALGAZ
ADDRESS:	821 Chesapeake Drive Cambridge, MD 21613
EMERGENCY PHONE:	CHEMTREC: 1-800-424-9300
BUSINESS PHONE:	1-410-228-6400
	General MSDS Information: 1-713/868-0440
	Fax on Demand: 1-800/231-1366

2. COMPOSITION and INFORMATION ON INGREDIENTS

CHEMICAL NAME	CAS #	mole %	EXPOSURE LIMITS IN AIR					
			ACGIH-TLV		OSHA-PEL		NIOSH IDLH ppm	OTHER ppm
			TWA ppm	STEL ppm	TWA ppm	STEL ppm		
Isobutylene	115-11-7	0.0005-0.9%	There are no specific exposure limits for Isobutylene.					
Oxygen	7782-44-7	0-23.5%	There are no specific exposure limits for Oxygen.					
Nitrogen	7727-37-9	Balance	There are no specific exposure limits for Nitrogen. Nitrogen is a simple asphyxiant (SA). Oxygen levels should be maintained above 19.5%.					

NE = Not Established.

See Section 16 for Definitions of Terms Used.

NOTE (1): ALL WHMIS required information is included in appropriate sections based on the ANSI Z400.1-1998 format. This gas mixture has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

3. HAZARD IDENTIFICATION

EMERGENCY OVERVIEW: This is a colorless, odorless gas mixture. Releases of this gas mixture may produce oxygen-deficient atmospheres (especially in confined spaces or other poorly-ventilated environments); individuals in such atmospheres may be asphyxiated. Isobutylene, a component of this gas mixture, may cause drowsiness and other central nervous system effects in high concentrations; however, due to its low concentration in this gas mixture, this is unlikely to occur.

SYMPTOMS OF OVER-EXPOSURE BY ROUTE OF EXPOSURE: The most significant route of over-exposure for this gas mixture is by inhalation.

INHALATION: Due to the small size of an individual cylinder of this gas mixture, no unusual health effects from over-exposure to the product are anticipated under routine circumstances of use. The chief health hazard associated with this gas mixture is when this gas mixture contains less than 19.5% Oxygen and is released in a small, poorly-ventilated area (i.e. an enclosed or confined space). Under this circumstance, an oxygen-deficient environment may occur. Individuals breathing such an atmosphere may experience symptoms which include headaches, ringing in ears, dizziness, drowsiness, unconsciousness, nausea, vomiting, and depression of all the senses. Under some circumstances of over-exposure, death may occur. The effects associated with various levels of oxygen are as follows:

CONCENTRATION OF OXYGEN

12-16% Oxygen:

10-14% Oxygen:

6-10% Oxygen:

Below 6%:

OBSERVED EFFECT

Breathing and pulse rate increase, muscular coordination slightly disturbed.

Emotional upset, abnormal fatigue, disturbed respiration.

Nausea, vomiting, collapse, or loss of consciousness.

Convulsive movements, possible respiratory collapse, and death.

HEALTH EFFECTS OR RISKS FROM EXPOSURE: An Explanation in Lay Terms. Over-exposure to this gas mixture may cause the following health effects:

ACUTE: Due to the small size of the individual cylinder of this gas mixture, no unusual health effects from exposure to the product are anticipated under routine circumstances of use. The most significant hazard associated with this gas mixture when it contains less than 19.5% oxygen is the potential for exposure to oxygen-deficient atmospheres. Symptoms of oxygen deficiency include respiratory difficulty, ringing in ears, headaches, shortness of breath, wheezing, headache, dizziness, indigestion, nausea, unconsciousness, and death. The skin of a victim of over-exposure may have a blue color. Additionally, Isobutylene, a component of this gas mixture, may cause drowsiness or central nervous system effects in high concentrations; however, due to its low concentration in this gas mixture, this is unlikely to occur.

CHRONIC: Chronic exposure to oxygen-deficient atmospheres (below 18% oxygen in air) may affect the heart and nervous system.

TARGET ORGANS: ACUTE: Respiratory system, eyes. CHRONIC: Heart, cardiovascular system, central nervous system.

HAZARDOUS MATERIAL IDENTIFICATION SYSTEM			
HEALTH HAZARD	(BLUE)		1
FLAMMABILITY HAZARD	(RED)		0
PHYSICAL HAZARD	(YELLOW)		0
PROTECTIVE EQUIPMENT			
EYES	RESPIRATORY	HANDS	BODY
See Section 8			
For Routine Industrial Use and Handling Applications			

4. FIRST-AID MEASURES

RESCUERS SHOULD NOT ATTEMPT TO RETRIEVE VICTIMS OF EXPOSURE TO THIS GAS MIXTURE WITHOUT ADEQUATE PERSONAL PROTECTIVE EQUIPMENT. At a minimum, Self-Contained Breathing Apparatus must be worn.

No unusual health effects are anticipated after exposure to this gas mixture, due to the small cylinder size. If any adverse symptom develops after over-exposure to this gas mixture, remove victim(s) to fresh air as quickly as possible. Only trained personnel should administer supplemental oxygen and/or cardio-pulmonary resuscitation if necessary. Victim(s) who experience any adverse effect after over-exposure to this gas mixture must be taken for medical attention. Rescuers should be taken for medical attention if necessary. Take a copy of the label and the MSDS to physician or other health professional with victim(s).

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Acute or chronic respiratory conditions may be aggravated by over-exposure to this gas mixture.

RECOMMENDATIONS TO PHYSICIANS: Administer oxygen, if necessary; treat symptoms and eliminate exposure.

5. FIRE-FIGHTING MEASURES

FLASH POINT: Not applicable.

AUTOIGNITION TEMPERATURE: Not applicable.

FLAMMABLE LIMITS (in air by volume, %):

Lower (LEL): Not applicable.

Upper (UEL): Not applicable.

FIRE EXTINGUISHING MATERIALS: Non-flammable gas mixture. Use extinguishing media appropriate for surrounding fire.


UNUSUAL FIRE AND EXPLOSION HAZARDS: This gas mixture is not flammable; however, containers, when involved in fire, may rupture or burst in the heat of the fire.

Explosion Sensitivity to Mechanical Impact: Not sensitive.

Explosion Sensitivity to Static Discharge: Not sensitive.

SPECIAL FIRE-FIGHTING PROCEDURES: Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment.

NFPA RATING



6. ACCIDENTAL RELEASE MEASURES

LEAK RESPONSE: Due to the small size and content of the cylinder, an accidental release of this gas mixture presents significantly less risk of an oxygen deficient environment and other safety hazards than a similar release from a larger cylinder. However, as with any chemical release, extreme caution must be used during emergency response procedures. In the event of a release in which the atmosphere is unknown, and in which other chemicals are potentially involved, evacuate immediate area. Such releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a leak, clear the affected area, protect people, and respond with trained personnel.

Allow the gas mixture to dissipate. If necessary, monitor the surrounding area (and the original area of the release) for oxygen. Oxygen levels must be above 19.5% before non-emergency personnel are allowed to re-enter area.

If leaking incidentally from the cylinder, contact your supplier.

7. HANDLING and USE

WORK PRACTICES AND HYGIENE PRACTICES: Be aware of any signs of dizziness or fatigue; exposures to fatal concentrations of this gas mixture could occur without any significant warning symptoms, due to oxygen deficiency. Do not attempt to repair, adjust, or in any other way modify the cylinders containing this gas mixture. If there is a malfunction or another type of operational problem, contact nearest distributor immediately.

STORAGE AND HANDLING PRACTICES: Cylinders should be firmly secured to prevent falling or being knocked-over. Cylinders must be protected from the environment, and preferably kept at room temperature (approximately 21°C [70°F]). Cylinders should be stored in dry, well-ventilated areas, away from sources of heat, ignition, and direct sunlight. Protect cylinders against physical damage. Full and empty cylinders should be segregated. Use a first-in, first-out inventory system to prevent full containers from being stored for long periods of time. These cylinders are not refillable. **WARNING! Do not refill DOT 39 cylinders. To do so may cause personal injury or property damage.**

SPECIAL PRECAUTIONS FOR HANDLING GAS CYLINDERS: WARNING! Compressed gases can present significant safety hazards. During cylinder use, use equipment designed for these specific cylinders. Ensure all lines and equipment are rated for proper service pressure.

PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT: Follow practices indicated in Section 6 (Accidental Release Measures). Make certain that application equipment is locked and tagged-out safely. Always use product in areas where adequate ventilation is provided.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

VENTILATION AND ENGINEERING CONTROLS: No special ventilation systems or engineering controls are needed under normal circumstances of use. As with all chemicals, use this gas mixture in well-ventilated areas. If this gas mixture is used in a poorly-ventilated area, install automatic monitoring equipment to detect the levels of Nitrous Oxide and Oxygen.

RESPIRATORY PROTECTION: No special respiratory protection is required under normal circumstances of use. Maintain oxygen levels above 19.5% in the workplace. Use supplied air respiratory protection when oxygen levels are below 19.5%, or during emergency response to a release of this gas mixture. During an emergency situation, before entering the area, check the concentration of Methane and Oxygen. If respiratory protection is needed, use only protection authorized in the U.S. Federal OSHA Standard (29 CFR 1910.134), applicable U.S. State regulations, or the Canadian CSA Standard Z94.4-93 and applicable standards of Canadian Provinces. Oxygen levels below 19.5% are considered IDLH by OSHA. In such atmospheres, use of a full-facepiece pressure/demand SCBA or a full facepiece, supplied air respirator with auxiliary self-contained air supply is required under OSHA's Respiratory Protection Standard (1910.134-1998).

EYE PROTECTION: Safety glasses. If necessary, refer to U.S. OSHA 29 CFR 1910.133 or appropriate Canadian Standards.

HAND PROTECTION: Wear leather gloves when handling cylinders. Chemically resistant gloves should be worn when using this gas mixture. If necessary, refer to U.S. OSHA 29 CFR 1910.138 or appropriate Standards of Canada.

BODY PROTECTION: No special protection is needed under normal circumstances of use. If a hazard of injury to the feet exists due to falling objects, rolling objects, where objects may pierce the soles of the feet or where employee's feet may be exposed to electrical hazards, use foot protection, as described in U.S. OSHA 29 CFR 1910.136.

9. PHYSICAL and CHEMICAL PROPERTIES

The following information is for Nitrogen, a main component of this gas mixture.

GAS DENSITY @ 32°F (0°C) and 1 atm: 0.072 lbs/ft³ (1.153 kg/m³)

BOILING POINT: -195.8°C (-320.4°F)

SPECIFIC GRAVITY (air = 1) @ 70°F (21.1°C): 0.906

SOLUBILITY IN WATER vol/vol @ 32°F (0°C) and 1 atm: 0.023

EVAPORATION RATE (nBuAc = 1): Not applicable.

ODOR THRESHOLD: Not applicable.

VAPOR PRESSURE @ 70°F (21.1°C) psig: Not applicable.

FREEZING/MELTING POINT @ 10 psig: -210°C (-345.8°F)

pH: Not applicable.

MOLECULAR WEIGHT: 28.01

EXPANSION RATIO: Not applicable.

SPECIFIC VOLUME (ft³/lb): 13.8

COEFFICIENT WATER/OIL DISTRIBUTION: Not applicable.

The following information is for Oxygen, a main component of this gas mixture.

GAS DENSITY @ 32°F (0°C) and 1 atm: 0.083 lb/cu ft (1.326 kg/m³)

FREEZING/MELTING POINT @ 10 psig: -218.8°C (-361.8°F)

SPECIFIC GRAVITY (air = 1) @ 70°F (21.1°C): 1.105

SOLUBILITY IN WATER vol/vol at 32°F (0°C) and 1 atm: 0.0491

EVAPORATION RATE (nBuAc = 1): Not applicable.

ODOR THRESHOLD: Not applicable.

VAPOR PRESSURE @ 70°F (21.1°C) psig: Not applicable.

BOILING POINT: -183.0°C (-297.4°F)

pH: Not applicable.

MOLECULAR WEIGHT: 32.00

EXPANSION RATIO: Not applicable.

VOLUME (ft³/lb): 12.1

COEFFICIENT WATER/OIL DISTRIBUTION: Not applicable.

The following information is for the gas mixture.

APPEARANCE AND COLOR: This is a colorless, odorless gas mixture.

HOW TO DETECT THIS SUBSTANCE (warning properties): There are no unusual warning properties associated with a release of this gas mixture. In terms of leak detection, fittings and joints can be painted with a soap solution to detect leaks, which will be indicated by a bubble formation.

10. STABILITY and REACTIVITY

STABILITY: Normally stable in gaseous state.

DECOMPOSITION PRODUCTS: The thermal decomposition products of Isobutylene include carbon oxides. The other components of this gas mixture do not decompose, per se, but can react with other compounds in the heat of a fire.

MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Titanium will burn in the Nitrogen component of this gas mixture. Lithium reacts slowly with Nitrogen at ambient temperatures. The Isobutylene component of this gas mixture is also incompatible with strong oxidizers (i.e. chlorine, bromine pentafluoride, oxygen difluoride, and nitrogen trifluoride).

HAZARDOUS POLYMERIZATION: Will not occur.

CONDITIONS TO AVOID: Contact with incompatible materials. Cylinders exposed to high temperatures or direct flame can rupture or burst.

11. TOXICOLOGICAL INFORMATION

TOXICITY DATA: The following toxicology data are available for the components of this gas mixture:

ISOBUTYLENE:

LC₅₀ (inhalation, rat) = 620,000 mg/kg/4 hours

LC₅₀ (inhalation, mouse) = 415,000 mg/kg

NITROGEN:

There are no specific toxicology data for Nitrogen. Nitrogen is a simple asphyxiant, which acts to displace oxygen in the environment.

SUSPECTED CANCER AGENT: The components of this gas mixture are not found on the following lists: FEDERAL OSHA Z LIST, NTP, CAL/OSHA, and IARC; therefore, they are not considered to be, nor suspected to be, cancer-causing agents by these agencies.

IRRITANCY OF PRODUCT: Contact with rapidly expanding gases can be irritating to exposed skin and eyes.

SENSITIZATION TO THE PRODUCT: The components of this gas mixture are not known to cause human skin or respiratory sensitization.

REPRODUCTIVE TOXICITY INFORMATION: Listed below is information concerning the effects of this gas mixture and its components on the human reproductive system.

Mutagenicity: No mutagenicity effects have been described for the components in this gas mixture.

Embryotoxicity: No embryotoxic effects have been described for the components in this gas mixture.

Teratogenicity: No teratogenicity effects have been described for the components in this gas mixture.

Reproductive Toxicity: No reproductive toxicity effects have been described for the components in gas mixture.

A mutagen is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate through generation lines. An embryotoxin is a chemical which causes damage to a developing embryo (i.e. within the first eight weeks of pregnancy in humans), but the damage does not propagate across generational lines. A teratogen is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A reproductive toxin is any substance which interferes in any way with the reproductive process.

BIOLOGICAL EXPOSURE INDICES (BEIs): Currently, Biological Exposure Indices (BEIs) are not applicable for the components of this gas mixture.

12. ECOLOGICAL INFORMATION

ENVIRONMENTAL STABILITY: The components of this gas mixture occur naturally in the atmosphere. The gas will be dissipated rapidly in well-ventilated areas. The following environmental data are applicable to the components of this gas mixture.

OXYGEN: Water Solubility = 1 volume Oxygen/32 volumes water at 20°C. Log K_{ow} = -0.65

NITROGEN: Water Solubility = 2.4 volumes Nitrogen/100 volumes water at 0°C. 1.6 volumes Nitrogen/100 volumes water at 20°C.

EFFECT OF MATERIAL ON PLANTS or ANIMALS: No evidence is currently available on the effects of this gas mixture on plant and animal life.

EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on the effects of this gas mixture on aquatic life.

13. DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL PREPARING WASTES FOR DISPOSAL: Waste disposal must be in accordance with appropriate Federal, State, and local regulations. Cylinders with undesired residual product may be safely vented outdoors with the proper regulator. For further information, refer to Section 16 (Other Information).

14. TRANSPORTATION INFORMATION

THIS GAS MIXTURE IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

PROPER SHIPPING NAME: Compressed gases, n.o.s. ("Oxygen, Nitrogen") or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not applicable.

DOT LABEL(S) REQUIRED: Class 2.2 (Non-Flammable Gas)

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

MARINE POLLUTANT: The components of this gas mixture are not classified by the DOT as Marine Pollutants (as defined by 49 CFR 172.101, Appendix B).

SPECIAL SHIPPING INFORMATION: Cylinders should be transported in a secure position, in a well-ventilated vehicle. The transportation of compressed gas cylinders in automobiles or in closed-body vehicles can present serious safety hazards. If transporting these cylinders in vehicles, ensure these cylinders are not exposed to extremely high temperatures (as may occur in an enclosed vehicle on a hot day). Additionally, the vehicle should be well-ventilated during transportation.

Note: DOT 39 Cylinders ship in a strong outer carton (overpack). Pertinent shipping information goes on the outside of the overpack. DOT 39 Cylinders do not have transportation information on the cylinder itself.

TRANSPORT CANADA TRANSPORTATION OF DANGEROUS GOODS REGULATIONS: This gas is considered as Dangerous Goods, per regulations of Transport Canada.

PROPER SHIPPING NAME: Compressed gases, n.o.s. ("Oxygen, Nitrogen") or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not Applicable

HAZARD LABEL: Class 2.2 (Non-Flammable Gas)

SPECIAL PROVISIONS: None

EXPLOSIVE LIMIT AND LIMITED QUANTITY INDEX: 0.12

ERAP INDEX: None

PASSENGER CARRYING SHIP INDEX: None

PASSENGER CARRYING ROAD VEHICLE OR PASSENGER CARRYING RAILWAY VEHICLE INDEX: 75

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

NOTE: Shipment of compressed gas cylinders via Public Passenger Road Vehicle is a violation of Canadian law (Transport Canada Transportation of Dangerous Goods Act, 1992).

15. REGULATORY INFORMATION

ADDITIONAL U.S. REGULATIONS:

U.S. SARA REPORTING REQUIREMENTS: The components of this gas mixture are not subject to the reporting requirements of Sections 302, 304, and 313 of Title III of the Superfund Amendments and Reauthorization Act.

U.S. SARA THRESHOLD PLANNING QUANTITY: There are no specific Threshold Planning Quantities for this gas mixture. The default Federal MSDS submission and inventory requirement filing threshold of 10,000 lb (4,540 kg) may apply, per 40 CFR 370.20.

U.S. TSCA INVENTORY STATUS: The components of this gas mixture are listed on the TSCA Inventory.

U.S. CERCLA REPORTABLE QUANTITY (RQ): Not applicable.

OTHER U.S. FEDERAL REGULATIONS:

- No component of this gas mixture is subject to the requirements of CFR 29 1910.1000 (under the 1989 PELs).
- Isobutylene is subject to the reporting requirements of Section 112(r) of the Clean Air Act. The Threshold Quantity for this gas is 10,000 pounds.
- The regulations of the Process Safety Management of Highly Hazardous Chemicals are not applicable (29 CFR 1910.119).
- This gas mixture does not contain any Class I or Class II ozone depleting chemicals (40 CFR Part 82).

15. REGULATORY INFORMATION (continued)

- Nitrogen and Oxygen are not listed as Regulated Substances, per 40 CFR, Part 68, of the Risk Management for Chemical Releases. Isobutylene is listed under this regulation in Table 3 as Regulated Substances (Flammable Substances), in quantities of 10,000 lbs (4,554 kg) or greater.

U.S. STATE REGULATORY INFORMATION: The components of this gas mixture are covered under the following specific State regulations:

Alaska - Designated Toxic and Hazardous Substances: No.
California - Permissible Exposure Limits for Chemical Contaminants: Nitrogen.
Florida - Substance List: Oxygen, Isobutylene.
Illinois - Toxic Substance List: No.
Kansas - Section 302/313 List: No.
Massachusetts - Substance List: Oxygen, Isobutylene.
Michigan - Critical Materials Register: No.
Minnesota - List of Hazardous Substances: No.
Missouri - Employer Information/Toxic Substance List: No.
New Jersey - Right to Know Hazardous Substance List: Oxygen, Nitrogen, Isobutylene.
North Dakota - List of Hazardous Chemicals, Reportable Quantities: No.
Pennsylvania - Hazardous Substance List: Oxygen, Nitrogen, Isobutylene.
Rhode Island - Hazardous Substance List: Oxygen, Nitrogen.
Texas - Hazardous Substance List: No.
West Virginia - Hazardous Substance List: No.
Wisconsin - Toxic and Hazardous Substances: : No.

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): No component of this gas mixture is on the California Proposition 65 lists.

ADDITIONAL CANADIAN REGULATIONS:

CANADIAN DSL/NDL INVENTORY STATUS: The components of this gas mixture are listed on the DSL Inventory.

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA) PRIORITIES SUBSTANCES LISTS: The components of this gas mixture are not on the CEPA Priorities Substances Lists.

CANADIAN WHMIS REGULATIONS: This gas mixture is categorized as a Controlled Product, Hazard Class A, as per the Controlled Product Regulations.

16. OTHER INFORMATION

INFORMATION ABOUT DOT-39 NRC (Non-Refillable Cylinder) PRODUCTS

DOT 39 cylinders ship as hazardous materials when full. Once the cylinders are relieved of pressure (empty) they are not considered hazardous material or waste. Residual gas in this type of cylinder is not an issue because toxic gas mixtures are prohibited. Calibration gas mixtures typically packaged in these cylinders are Nonflammable n.o.s., UN 1956. A small percentage of calibration gases packaged in DOT 39 cylinders are flammable or oxidizing gas mixtures.

For disposal of used DOT-39 cylinders, it is acceptable to place them in a landfill if local laws permit. Their disposal is no different than that employed with other DOT containers such as spray paint cans, household aerosols, or disposable cylinders of propane (for camping, torch etc.). When feasible, we recommended recycling for scrap metal content. CALGAZ will do this for any customer that wishes to return cylinders to us prepaid. All that is required is a phone call to make arrangements so we may anticipate arrival. Scrapping cylinders involves some preparation before the metal dealer may accept them. We perform this operation as a service to valued customers who want to participate.

MIXTURES: When two or more gases or liquefied gases are mixed, their hazardous properties may combine to create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an Industrial Hygienist or other trained person when you make your safety evaluation of the end product. Remember, gases and liquids have properties which can cause serious injury or death.


Further information about the handling of compressed gases can be found in the following pamphlets published by: Compressed Gas Association Inc. (CGA), 1725 Jefferson Davis Highway, Suite 1004, Arlington, VA 22202-4102. Telephone: (703) 412-0900.

P-1	"Safe Handling of Compressed Gases in Containers"
AV-1	"Safe Handling and Storage of Compressed Gases"
	"Handbook of Compressed Gases"

PREPARED BY: CHEMICAL SAFETY ASSOCIATES, Inc.
PO Box 3519, La Mesa, CA 91944-3519
619/670-0609
Fax on Demand: 1-800/231-1366



This Material Safety Data Sheet is offered pursuant to OSHA's Hazard Communication Standard, 29 CFR, 1910.1200. Other government regulations must be reviewed for applicability to this gas mixture. To the best of CALGAZ knowledge, the information contained herein is reliable and accurate as of this date; however, accuracy, suitability or completeness are not guaranteed and no warranties of any type, either express or implied, are provided. The information contained herein relates only to this specific product. If this gas mixture is combined with other materials, all component properties must be considered. Data may be changed from time to time. Be sure to consult the latest edition.



Health	1
Fire	2
Reactivity	1
Personal Protection	E

Material Safety Data Sheet

Iron Metal MSDS

Section 1: Chemical Product and Company Identification

Product Name: Iron Metal

Catalog Codes: SLI2047, SLI1996

CAS#: 7439-89-6

RTECS: NO4565500

TSCA: TSCA 8(b) inventory: Iron Metal

CI#: Not applicable.

Synonym:

Chemical Name: Iron

Chemical Formula: Fe

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Iron Metal, powder	7439-89-6	100

Toxicological Data on Ingredients: Not applicable.

Section 3: Hazards Identification

Potential Acute Health Effects: Slightly hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to liver, cardiovascular system, upper respiratory tract, pancreas. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

Skin Contact: Wash with soap and water. Get medical attention if irritation develops.

Serious Skin Contact: Not available.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

Serious Inhalation: Not available.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: Not available.

Flash Points: Not available.

Flammable Limits: Not available.

Products of Combustion: Some metallic oxides.

Fire Hazards in Presence of Various Substances: Flammable in presence of heat.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Explosive in presence of open flames and sparks, of heat.

Fire Fighting Media and Instructions:

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

Special Remarks on Fire Hazards:

Chlorine Trifluoride reacts with iron with incandescence. Powdered iron reacts with fluorine below redness with incandescence. Reduced iron decomposes with nitrogen dioxide @ ordinary temperature with incandescence. Reacting mass formed by mixture of phosphorus and iron can become incandescent when heated. This material is flammable in powder form only.

Special Remarks on Explosion Hazards: Material in powdered form can explode when exposed to heat or flame

Section 6: Accidental Release Measures

Small Spill:

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

Large Spill:

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system.

Section 7: Handling and Storage

Precautions:

Do not ingest. Do not breathe dust. If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents, acids.

Storage: Keep container tightly closed. Keep container in a cool, well-ventilated area. Moisture sensitive.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection: Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits: Not available.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid. (Solid metallic powder.)

Odor: Odorless.

Taste: Tasteless.

Molecular Weight: 55.85 g/mole

Color: Black to Grey.

pH (1% soln/water): Not applicable.

Boiling Point: 3000°C (5432°F)

Melting Point: 1535°C (2795°F)

Critical Temperature: Not available.

Specific Gravity: Density: 7.86 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: Not available.

Volatility: Not available.

Odor Threshold: Not available.

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: Not available.

Solubility: Insoluble in cold water, hot water, diethyl ether.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Excess heat, ignition sources, incompatible materials, water/moisture, air, dust generation.

Incompatibility with various substances:

Reactive with oxidizing agents, acids. Slightly reactive to reactive with moisture.

Corrosivity: Not considered to be corrosive for metals and glass.

Special Remarks on Reactivity:

Hot iron(wire) burns in Chlorine gas. Violent decomposition of hydrogen peroxide (53% by weight or greater) may be caused by contact with iron. Readily oxidizes in moist air forming rust. Reactive with halogens. Incompatible with acetaldehyde, ammonium peroxodisulfate, chloroformamidinum, chloric acid, ammonium nitrate, dinitrogen tetroxide, nitryl fluoride, polystyrene, sodium acetylide, potassium dichromate, peroxyformic acid, sulfuric acid, sodium carbide. Readily attacked by dilute mineral acids and or attacked or dissolved by organic acids. Not appreciably attacked by cold sulfuric acid, or nitric acid, but is attacked by hot acids.

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Inhalation. Ingestion.

Toxicity to Animals: Acute oral toxicity (LD50): 30000 mg/kg [Rat].

Chronic Effects on Humans: May cause damage to the following organs: liver, cardiovascular system, upper respiratory tract, pancreas.

Other Toxic Effects on Humans: Slightly hazardous in case of skin contact (irritant), of ingestion, of inhalation.

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: Not available.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: Skin: Iron metal filings or dust: May cause skin irritation by mechanical action. Iron metal wire: Not likely to cause skin irritation Eyes: Iron metal filings or dust: Can irritate eyes by mechanical action. Iron metal wire: No hazard. Will not cause eye irritation. Inhalation: Iron dust: Can irritate the respiratory tract by mechanical action. Iron metal wire or filings: Not an inhalation hazard unless metal is heated. If metal is heated, fumes will be released. Inhalation of these fumes may cause "fume metal fever", which is characterized by flu-like symptoms. Symptoms may include metallic taste, fever, nausea, vomiting, chills, cough, weakness, chest pain, generalized muscle pain/aches, and increased white blood cell count. Ingestion: Iron metal wire: Not an ingestion hazard: Iron metal filings or dust: The amount of ingested iron which constitutes a toxic dose is not well defined. Proposed toxic doses of elemental iron are 20 mg/kg for gastrointestinal irritation to greater than 60 mg/kg for systemic toxicity. Gastrointestinal effects are the first signs to appear, with hemorrhagic vomiting and diarrhea, hematochezia, abdominal pain, lethargy, metabolic acidosis, coagulopathy, shock, coma and convulsions developing from 0 to 6 hours after ingestion. Leukocytosis may also occur. An asymptomatic phase may ensue at 6 to 12 hours postingestion, followed by hypoglycemia or hyperglycemia, hepatic and renal failure, severe acidosis, cyanosis, fever, CNS depression (lethargy, restlessness and/or confusion seizures), hypotension, and cardiovascular collapse/cardiac failure in 12 to 48 hours. Hepatic cirrhosis, gastrointestinal scarring and/or strictures may arise in 2 to 6 weeks. It may also cause an anaphylactoid reaction. Non-cardiogenic pulmonary edema also develop in severe cases of iron intoxication. Chronic Potential Health Effects: Inhalation: Chronic inhalation of iron dust can lead to accumulation in the lungs and a characteristic stippled appearance on X-rays. This condition, called SIDEROSIS, is considered benign in that it does not interfere with lung function and does not predispose to other disease. Chronic inhalation of iron dust may also cause fibrosis in the lungs. Ingestion: Clinical signs of iron overload appear when the total body iron is 5 to 10 times higher than normal. Neurobehavioral defects including depression, decreased activity, habituation, reflex startle, and conditioned avoidance response performance may occur. However, similar effects were also seen in iron deficiency. It is therefore likely that these behavioral effects are secondary to general toxicity. High serum iron levels may be associated with an increased risk of fatal acute myocardial infarction (MI). Skin: Prolonged or repeated contact may cause hypersensitivity.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The product itself and its products of degradation are not toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 4.1: Flammable solid.

Identification: : Metal powder, flammable, n.o.s. (Iron metal powder) UNNA: 3089 PG: III

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

California Director's List of Hazardous Substances: Iron Metal TSCA 8(b) inventory: Iron Metal

Other Regulations: EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada): CLASS B-4: Flammable solid.

DSCL (EEC):

R11- Highly flammable. S16- Keep away from sources of ignition - No smoking. S22- Do not breathe dust.

HMIS (U.S.A.):

Health Hazard: 1

Fire Hazard: 2

Reactivity: 1

Personal Protection: E

National Fire Protection Association (U.S.A.):

Health: 1

Flammability: 2

Reactivity: 1

Specific hazard:

Protective Equipment:

Gloves Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/09/2005 05:52 PM

Last Updated: 11/06/2008 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Version 4.7
Revision Date 12/29/2015
Print Date 02/07/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Lead

Product Number : 391352
Brand : Aldrich

CAS-No. : 7439-92-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302
Carcinogenicity (Category 2), H351
Reproductive toxicity (Category 2), H361
Specific target organ toxicity - repeated exposure (Category 2), H373
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H302 Harmful if swallowed.
H351 Suspected of causing cancer.
H361 Suspected of damaging fertility or the unborn child.
H373 May cause damage to organs through prolonged or repeated exposure.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and

	understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell. Rinse mouth.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Pb
Molecular weight	:	207.20 g/mol
CAS-No.	:	7439-92-1
EC-No.	:	231-100-4

Hazardous components

Component	Classification	Concentration
Lead		
	Acute Tox. 4; Carc. 2; Repr. 2; STOT RE 2; Aquatic Acute 1; Aquatic Chronic 1; H302, H351, H361, H373, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Lead oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

Storage class (TRGS 510): Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	See 1910.1025		
Lead	7439-92-1	TWA	0.05 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
		Confirmed animal carcinogen with unknown relevance to humans		
		TWA	0.05 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Hematologic effects Peripheral Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed animal carcinogen with unknown relevance to humans		

		TWA	0.05 mg/m ³	USA. NIOSH Recommended Exposure Limits
		See Appendix C		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Lead	7439-92-1	Lead	30µg/ 100 ml	In blood	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Not critical			
		Lead	30µg/ 100 ml	In blood	ACGIH - Biological Exposure Indices (BEI)
		Not critical			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: powder |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 327.4 °C (621.3 °F) - lit. |
| f) Initial boiling point and boiling range | 1,740 °C (3,164 °F) - lit. |
| g) Flash point | Not applicable |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | No data available |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong acids

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

Rat

Cytogenetic analysis

Carcinogenicity

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Lead)

NTP: Reasonably anticipated to be a human carcinogen (Lead)

Reasonably anticipated to be a human carcinogen The reference note has been added by TD based on the background information of the NTP. (Lead)

OSHA: 1910.1025 (Lead)

OSHA specifically regulated carcinogen (Lead)

Reproductive toxicity

Suspected human reproductive toxicant

Reproductive toxicity - Rat - Inhalation

Effects on Newborn: Biochemical and metabolic.

Reproductive toxicity - Rat - Oral

Effects on Newborn: Behavioral.

Reproductive toxicity - Mouse - Oral

Effects on Fertility: Female fertility index (e.g., # females pregnant per # sperm positive females; # females pregnant per # females mated). Effects on Fertility: Pre-implantation mortality (e.g., reduction in number of implants per female; total number of implants per corpora lutea).

Developmental Toxicity - Rat - Inhalation

Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Specific Developmental Abnormalities: Blood and lymphatic system (including spleen and marrow).

Developmental Toxicity - Rat - Oral

Specific Developmental Abnormalities: Blood and lymphatic system (including spleen and marrow). Effects on Newborn: Growth statistics (e.g., reduced weight gain).

Developmental Toxicity - Rat - Oral

Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Effects on Embryo or Fetus: Fetal death.

Developmental Toxicity - Mouse - Oral

Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Effects on Embryo or Fetus: Fetal death.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

May cause damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

Additional Information

RTECS: OF7525000

anemia

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish mortality LOEC - *Oncorhynchus mykiss* (rainbow trout) - 1.19 mg/l - 96.0 h

LC50 - *Micropterus dolomieu* - 2.2 mg/l - 96.0 h

mortality NOEC - *Salvelinus fontinalis* - 1.7 mg/l - 10.0 d

Toxicity to daphnia and other aquatic invertebrates mortality LOEC - *Daphnia* (water flea) - 0.17 mg/l - 24 h

mortality NOEC - *Daphnia* (water flea) - 0.099 mg/l - 24 h

Toxicity to algae mortality EC50 - *Skeletonema costatum* - 7.94 mg/l - 10 d

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation *Oncorhynchus kisutch* - 2 Weeks
- 150 µg/l

Bioconcentration factor (BCF): 12

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 3077 Class: 9

Packing group: III

Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Lead)

Reportable Quantity (RQ): 10 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Lead)
Marine pollutant:yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Lead)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Lead	7439-92-1	1994-04-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Lead	7439-92-1	1994-04-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Lead	7439-92-1	1994-04-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Lead	7439-92-1	1994-04-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

CAS-No.	Revision Date
7439-92-1	1989-07-10

Lead

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

CAS-No.	Revision Date
7439-92-1	1989-07-10

Lead

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H302	Harmful if swallowed.
H351	Suspected of causing cancer.
H361	Suspected of damaging fertility or the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure.

H400 Very toxic to aquatic life.
H410 Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard: 1
Chronic Health Hazard: *
Flammability: 0
Physical Hazard 0

NFPA Rating

Health hazard: 1
Fire Hazard: 0
Reactivity Hazard: 0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.7

Revision Date: 12/29/2015

Print Date: 02/07/2016

FLINN SCIENTIFIC, INC.

Material Safety Data Sheet (MSDS)

MSDS #: 468.00

Revision Date: July 13, 2011

SECTION 1 — CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Magnesium

Flinn Scientific, Inc. P.O. Box 219 Batavia, IL 60510 (800) 452-1261

CHEMTREC Emergency Phone Number: (800) 424-9300

SECTION 2 — COMPOSITION, INFORMATION ON INGREDIENTS

Magnesium

CAS#: 7439-95-4

SECTION 3 — HAZARDS IDENTIFICATION

Silvery-white metal granules, turnings or ribbon. Odorless.
Flammable solid.

FLINN AT-A-GLANCE

Health-0
Flammability-2
Reactivity-2
Exposure-0
Storage-2

0 is low hazard, 3 is high hazard

SECTION 4 — FIRST AID MEASURES

Call a physician and seek medical attention for further treatment, observation, and support after first aid.

Inhalation: Remove to fresh air at once. If breathing has stopped, give artificial respiration immediately.

Eye or External: Immediately flush with fresh water for at least 15 minutes.

Internal: Rinse out mouth. Give large quantities of water for dilution. Induce vomiting. Call a physician or poison control at once.

SECTION 5 — FIRE FIGHTING MEASURES

Flammable solid.

Water reactive metal; avoid contact with acids or water.

Fire Fighting Instructions: Use Class D, Met-L-X, or dry sand as a fire extinguisher. Avoid water contact, violent reaction with water. Firefighters should wear PPE and SCBA with full facepiece operating in positive mode.

NFPA CODE

H-0
F-1
R-1
No Water

SECTION 6 — ACCIDENTAL RELEASE MEASURES

Restrict unprotected personnel from the area. Remove all ignition sources and water. Sweep up the spill, place in a sealed bag or container, and dispose. Ventilate area and wash spill site after material pickup is complete. See Sections 8 and 13 for further information.

SECTION 7 — HANDLING AND STORAGE

Flinn Suggested Chemical Storage Pattern: Inorganic #1. Store with metals and metal hydrides.

Store in a Flinn Saf-Stor can.

SECTION 8 — EXPOSURE CONTROLS, PERSONAL PROTECTION

Avoid contact with eyes, skin, and clothing. Wear chemical splash goggles, chemical-resistant gloves, and a chemical-resistant apron. Use exhaust ventilation to keep airborne concentrations low.

SECTION 9 — PHYSICAL AND CHEMICAL PROPERTIES

Silvery-white, odorless, metal turnings or ribbon.

Solubility: Insoluble in water. Soluble in acids.

Formula: Mg

Formula weight: 24.31

Melting point: 651 °C

Specific gravity: 1.74

SECTION 10 — STABILITY AND REACTIVITY

Avoid contact with water, acids, acid chlorides, strong oxidizers, halogens, and chlorinated solvents.

Shelf life: Indefinite, if stored properly.

SECTION 11 — TOXICOLOGICAL INFORMATION

Acute effects: Irritating dust.

Chronic effects: N.A.

Target organs: N.A.

ORL-RAT LD₅₀: N.A.IHL-RAT LC₅₀: N.A.SKN-RBT LD₅₀: N.A.

N.A. = Not available, not all health aspects of this substance have been fully investigated.

SECTION 12 — ECOLOGICAL INFORMATION

Data not yet available.

SECTION 13 — DISPOSAL CONSIDERATIONS

Please review all federal, state and local regulations that may apply, before proceeding.

Flinn Suggested Disposal Method #26a is one option.

SECTION 14 — TRANSPORT INFORMATION

Shipping name: Magnesium

Hazard class: 4.1, Flammable solid

UN number: UN1869

N/A = Not applicable

SECTION 15 — REGULATORY INFORMATION

TSCA-listed, EINECS-listed (231-104-6), RCRA code D001.

SECTION 16 — OTHER INFORMATION

This Material Safety Data Sheet (MSDS) is for guidance and is based upon information and tests believed to be reliable. Flinn Scientific, Inc. makes no guarantee of the accuracy or completeness of the data and shall not be liable for any damages relating thereto. The data is offered solely for your consideration, investigation, and verification. The data should not be confused with local, state, federal or insurance mandates, regulations, or requirements and CONSTITUTE NO WARRANTY. Any use of this data and information must be determined by the science instructor to be in accordance with applicable local, state or federal laws and regulations. The conditions or methods of handling, storage, use and disposal of the product(s) described are beyond the control of Flinn Scientific, Inc. and may be beyond our knowledge. FOR THIS AND OTHER REASONS, WE DO NOT ASSUME RESPONSIBILITY AND EXPRESSLY DISCLAIM LIABILITY FOR LOSS, DAMAGE OR EXPENSE ARISING OUT OF OR IN ANY WAY CONNECTED WITH THE HANDLING, STORAGE, USE OR DISPOSAL OF THIS PRODUCT(S).

**Consult your copy of the *Flinn Science Catalog/Reference Manual*
for additional information about laboratory chemicals.**



SAFETY DATA SHEET

Creation Date 24-Nov-2010

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Manganese, powder, -325 mesh

Cat No. : AC317440000; AC317440010; AC317442500

Synonyms No information available

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable solids	Category 2
Serious Eye Damage/Eye Irritation	Category 2

Label Elements

Signal Word
Warning

Hazard Statements
Flammable solid
Causes serious eye irritation



Precautionary Statements **Prevention**

Wash face, hands and any exposed skin thoroughly after handling

Keep away from heat/sparks/open flames/hot surfaces. - No smoking
 Ground/bond container and receiving equipment
 Use explosion-proof electrical/ventilating/lighting/equipment
 Wear protective gloves/protective clothing/eye protection/face protection

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
 If eye irritation persists: Get medical advice/attention

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Hazards not otherwise classified (HNOC)

None identified

3. Composition / information on ingredients

Component	CAS-No	Weight %
Manganese	7439-96-5	>95

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
Skin Contact	Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes. Obtain medical attention.
Inhalation	Remove from exposure, lie down. Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. Obtain medical attention.
Ingestion	Clean mouth with water. Get medical attention.
Most important symptoms/effects Notes to Physician	No information available. Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Dry chemical.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Combustible material.

Hazardous Combustion Products

None known

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
2Flammability
2Instability
0Physical hazards
N/A

6. Accidental release measures

Personal Precautions

Ensure adequate ventilation. Use personal protective equipment.

Environmental Precautions

See Section 12 for additional ecological information.

Methods for Containment and Clean Up

Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment. Sweep up or vacuum up spillage and collect in suitable container for disposal.

7. Handling and storage

Handling

Avoid contact with skin and eyes. Do not breathe dust. Use explosion-proof equipment. Use only non-sparking tools.

Storage

Keep in a dry, cool and well-ventilated place. Keep container tightly closed. Keep away from heat and sources of ignition. Keep under nitrogen.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Manganese	TWA: 0.02 mg/m ³ TWA: 0.1 mg/m ³	(Vacated) TWA: 1 mg/m ³ Ceiling: 5 mg/m ³ (Vacated) STEL: 3 mg/m ³ (Vacated) Ceiling: 5 mg/m ³	IDLH: 500 mg/m ³ TWA: 1 mg/m ³ STEL: 3 mg/m ³

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Manganese	TWA: 0.2 mg/m ³	TWA: 0.2 mg/m ³ TWA: 1 mg/m ³ STEL: 3 mg/m ³	TWA: 0.2 mg/m ³

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures

Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection

No protective equipment is needed under normal use conditions.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State

Powder Solid

Appearance

Dark brown

Odor

No information available

Odor Threshold

No information available

pH

No information available

Melting Point/Range

1260 °C / 2300 °F

Boiling Point/Range

1900 °C / 3452 °F

Flash Point	No information available
Evaporation Rate	Not applicable
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	No information available
Vapor Density	Not applicable
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	
Decomposition Temperature	No information available
Viscosity	Not applicable
Molecular Formula	Mn
Molecular Weight	54.94

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Moisture sensitive.
Conditions to Avoid	Incompatible products. Exposure to moisture.
Incompatible Materials	Acids, Bases, Halogens
Hazardous Decomposition Products	None under normal use conditions
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Manganese	9 g/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation	No information available
Sensitization	No information available
Carcinogenicity	The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Manganese	7439-96-5	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure	None known
STOT - repeated exposure	None known
Aspiration hazard	No information available
Symptoms / effects,both acute and delayed	No information available
Endocrine Disruptor Information	No information available
Other Adverse Effects	The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Persistence and Degradability	Insoluble in water
Bioaccumulation/ Accumulation	No information available.

Mobility Is not likely mobile in the environment due its low water solubility.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No	UN3089
Hazard Class	4.1
Packing Group	III

TDG

UN-No	UN3089
Hazard Class	4.1
Packing Group	III

IATA

UN-No	3089
Proper Shipping Name	METAL POWDER, FLAMMABLE, N.O.S.
Hazard Class	4.1
Packing Group	III

IMDG/IMO

UN-No	3089
Proper Shipping Name	METAL POWDER, FLAMMABLE, N.O.S.
Hazard Class	4.1
Packing Group	III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Manganese	X	X	-	231-105-1	-		X	-	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Manganese	7439-96-5	>95	1.0

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	Yes
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act Not applicable

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Manganese	X		-

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA
Not applicable

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Manganese	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class B4 Flammable solid

D2B Toxic materials



16. Other information

Prepared By	Regulatory Affairs Thermo Fisher Scientific Email: EMSDS.RA@thermofisher.com
Creation Date	24-Nov-2010
Revision Date	10-Feb-2015
Print Date	10-Feb-2015
Revision Summary	This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

ERROR: undefined
OFFENDING COMMAND: get

STACK:

/quit
-dictionary-
-mark-



SAFETY DATA SHEET

Creation Date 04-Oct-2010

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Nickel, powder

Cat No. : AC193610000; AC193610250; AC193611000; AC193615000

Synonyms Raney alloy

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin Sensitization	Category 1
Carcinogenicity	Category 2
Specific target organ toxicity - (repeated exposure)	Category 1
Target Organs - Kidney, Blood.	

Label Elements

Signal Word

Danger

Hazard Statements

May cause an allergic skin reaction
Causes damage to organs through prolonged or repeated exposure
Suspected of causing cancer



Precautionary Statements

Prevention

Obtain special instructions before use
 Do not handle until all safety precautions have been read and understood
 Wear protective gloves/protective clothing/eye protection/face protection
 Do not breathe dust/fume/gas/mist/vapors/spray
 Wash face, hands and any exposed skin thoroughly after handling
 Do not eat, drink or smoke when using this product
 Contaminated work clothing should not be allowed out of the workplace

Response

IF exposed or concerned: Get medical attention/advice

Skin

IF ON SKIN: Wash with plenty of soap and water
 If skin irritation or rash occurs: Get medical advice/attention
 Wash contaminated clothing before reuse

Storage

Store locked up

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Harmful to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Nickel powder	7440-02-0	>95

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Immediate medical attention is required.
Skin Contact	Wash off immediately with plenty of water for at least 15 minutes. Immediate medical attention is required.
Inhalation	Move to fresh air. If breathing is difficult, give oxygen. Do not use mouth-to-mouth resuscitation if victim ingested or inhaled the substance; induce artificial respiration with a respiratory medical device. Immediate medical attention is required.
Ingestion	Do not induce vomiting. Call a physician or Poison Control Center immediately.
Most important symptoms/effects	May cause allergic skin reaction. Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	400 °C / 752 °F
Explosion Limits	
Upper	No data available
Lower	No data available

Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Combustible material.

Hazardous Combustion Products

Nickel oxides.

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

NFPA

Health 3	Flammability 1	Instability 0	Physical hazards N/A
--------------------	--------------------------	-------------------------	--------------------------------

6. Accidental release measures

Personal Precautions

Ensure adequate ventilation. Use personal protective equipment. Keep people away from and upwind of spill/leak. Evacuate personnel to safe areas. Avoid dust formation.

Environmental Precautions

Should not be released into the environment. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up

Sweep up or vacuum up spillage and collect in suitable container for disposal. Avoid dust formation.

7. Handling and storage

Handling

Use only under a chemical fume hood. Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Avoid dust formation. Do not breathe vapors/dust. Do not ingest.

Storage

Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Nickel powder	TWA: 1.5 mg/m ³	(Vacated) TWA: 1 mg/m ³ TWA: 1 mg/m ³	IDLH: 10 mg/m ³ TWA: 0.015 mg/m ³

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Nickel powder	TWA: 1 mg/m ³	TWA: 1 mg/m ³	TWA: 1 mg/m ³

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures

Use only under a chemical fume hood. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment

Eye/face Protection

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Solid
Appearance	Brown
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	1455 °C / 2651 °F
Boiling Point/Range	2730 °C / 4946 °F
Flash Point	No information available
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	1 mmHg @ 1810 °C
Vapor Density	No information available
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	400 °C / 752 °F
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	Ni
Molecular Weight	58.7

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products. Excess heat. Avoid dust formation.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	Nickel oxides
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Nickel powder	9000 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization May cause sensitization by skin contact Nickel and nickel compounds may cause a form of dermatitis known as nickel itch. May cause an allergic skin reaction

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Nickel powder	7440-02-0	Group 2B	Reasonably Anticipated	Not listed	X	Not listed

IARC: (International Agency for Research on Cancer)

Group 2B - Possibly Carcinogenic to Humans

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure Kidney Blood

Aspiration hazard No information available

Symptoms / effects, both acute and delayed Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing

Endocrine Disruptor Information No information available

Other Adverse Effects See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Do not empty into drains. Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Nickel powder	0.18 mg/L EC50 = 72 h 0.174 - 0.311 mg/L EC50 96 h	10.4 mg/L LC50 96 h 1.3 mg/L LC50 96 h 100 mg/L LC50 96 h	Not listed	1 mg/L EC50 = 48 h 100 mg/L EC50 > 48 h

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility No information available.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN3089
Proper Shipping Name METAL POWDERS, FLAMMABLE, N.O.S.
Hazard Class 4.1
Packing Group II

TDG

UN-No UN3089
Proper Shipping Name METAL POWDERS, FLAMMABLE, N.O.S.
Hazard Class 4.1
Packing Group II

IATA

UN-No	3089
Proper Shipping Name	METAL POWDERS, FLAMMABLE, N.O.S.
Hazard Class	4.1
Packing Group	II
IMDG/IMO	
UN-No	3089
Proper Shipping Name	METAL POWDERS, FLAMMABLE, N.O.S.
Hazard Class	4.1
Packing Group	II

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Nickel powder	X	X	-	231-111-4	-		X	-	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Nickel powder	7440-02-0	>95	0.1

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	Yes
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Nickel powder	-	-	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Nickel powder	X		-

OSHA Occupational Safety and Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive

Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Nickel powder	100 lb	-

California Proposition 65 This product contains the following Proposition 65 chemicals:

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Nickel powder	7440-02-0	Carcinogen	-	Carcinogen

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Nickel powder	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N
 DOT Marine Pollutant N
 DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D2A Very toxic materials



16. Other information

Prepared By Regulatory Affairs
 Thermo Fisher Scientific
 Email: EMSDS.RA@thermofisher.com

Creation Date 04-Oct-2010

Revision Date 10-Feb-2015

Print Date 10-Feb-2015

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

Potassium

MSDS # 578.00

Section 1: Product and Company Identification**Potassium****Synonyms/General Names:** Kalium**Product Use:** For educational use only**Manufacturer:** Columbus Chemical Industries, Inc., Columbus, WI 53925.**24 Hour Emergency Information Telephone Numbers****CHEMTREC (USA): 800-424-9300****CANUTEC (Canada): 613-424-6666**

Scholar Chemistry; 5100 W. Henrietta Rd, Rochester, NY 14586; (866) 260-0501; www.Scholarchemistry.com

Section 2: Hazards Identification*Soft, silvery metal, turning grey on exposure to air, no odor.***HMIS (0 to 4)****DANGER!** Flammable solid, contact with water produces heat, flammable hydrogen gas and possibly fire.

Dangerous fire risk. Toxic by ingestion and corrosive to body tissue.

Target organs: None available

This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Health	3
Fire Hazard	4
Reactivity	3

Section 3: Composition / Information on Ingredients

Potassium (7440-09-7), >99%

Section 4: First Aid Measures*Always seek professional medical attention after first aid measures are provided.***Eyes:** Immediately flush eyes with excess water for 15 minutes, lifting lower and upper eyelids occasionally.**Skin:** Immediately flush skin with excess water for 15 minutes while removing contaminated clothing.**Ingestion:** Call Poison Control immediately. Rinse mouth with cold water. Give victim 1-2 tbs of activated charcoal mixed with 8 oz water.**Inhalation:** Remove to fresh air. If not breathing, give artificial respiration.**Section 5: Fire Fighting Measures**

Flammable solid and water reactive. When heated to decomposition, emits acrid fumes of KOx.

Protective equipment and precautions for firefighters: Do Not Use carbon dioxide, foam, water or halogenated extinguishing agents. Use class D extinguisher or smother with soda ash, dry sand, dry clay, dry sodium chloride or dry graphite. Firefighters should wear full fire fighting turn-out gear and respiratory protection (SCBA).

Material is not sensitive to mechanical impact or static discharge.

**Section 6: Accidental Release Measures**

Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all ignition sources and ventilate area. Water-reactive metal – keep away from all water. Pick up pieces and place material in a dry container and cover completely with pure mineral oil for disposal.

See Section 13 for disposal information.

Section 7: Handling and Storage**Red****Handling: Water-Reactive,** keep away from water. Use with adequate ventilation and do not breathe dust or vapor. Avoid contact with skin, eyes, or clothing. Wash hands thoroughly after handling.**Storage:** Store in Flammable Area [Red Storage] with other flammable materials and away from any strong oxidizers. Store in a dedicated flammables cabinet. Store in a cool, dry, well-ventilated, locked store room away from incompatible materials. Keep potassium metal immersed in mineral oil.**Section 8: Exposure Controls / Personal Protection**

Use ventilation to keep airborne concentrations below exposure limits. Have approved eyewash facility, safety shower, and fire extinguishers readily available. Wear chemical splash goggles and chemical resistant clothing such as gloves and aprons. Wash hands thoroughly after handling material and before eating or drinking. Exposure guidelines: Potassium: OSHA PEL: N/A and ACGIH TLV: N/A, STEL: N/A.

Section 9: Physical and Chemical Properties

Molecular formula	K.	Appearance	Soft, silvery-metal cubes, lumps.
Molecular weight	39.10.	Odor	No odor.
Specific Gravity	0.89 g/mL @ 20°C.	Odor Threshold	N/A.
Vapor Density (air=1)	N/A.	Solubility	Reacts violently.
Melting Point	63°C.	Evaporation rate	N/A. (<i>Butyl acetate = 1</i>).
Boiling Point/Range	774°C.	Partition Coefficient	N/A. (<i>log P_{ow}</i>).
Vapor Pressure (20°C)	N/A.	pH	N/A.
Flash Point:	N/A.	LEL	N/A.
Autoignition Temp.:	N/A.	UEL	N/A.

N/A = Not available or applicable

Section 10: Stability and Reactivity

Avoid heat, water, and ignition sources. Contact with water produces heat and flammable hydrogen gas.

Stability: Stable under normal conditions of use.

Incompatibility: Water, acids, oxidizing agents, oxygen, nitrogen and carbon dioxide.

Shelf life: Fair shelf live. Will form explosive peroxides with age. If surface contains yellow areas – do not use.

Section 11: Toxicology Information

Acute Symptoms/Signs of exposure: *Eyes:* Stinging pain, burns, watering of eyes, inflammation of eyelids and conjunctivitis. Avoid looking at burning magnesium. *Skin:* Irritation, redness, burns. Powdered metal reacts readily on skin causing burns.

Ingestion: Nausea, vomiting and headache. *Inhalation:* Rapid irregular breathing, headache, burns to mucous membranes. Inhalation of dust or fumes causes metal fume fever.

Chronic Effects: Repeated/prolonged skin contact may cause dryness or rashes.

Sensitization: none expected

Potassium: LD50 [oral, rat]; N/A; LC50 [rat]; N/A; LD50 Dermal [rabbit]; N/A

Material has not been found to be a carcinogen nor produce genetic, reproductive, or developmental effects.

Section 12: Ecological Information

Ecotoxicity (aquatic and terrestrial): Ecological impact has not been determined.

Section 13: Disposal Considerations

Check with all applicable local, regional, and national laws and regulations. Local regulations may be more stringent than regional or national regulations. Use a licensed chemical waste disposal firm for proper disposal.

Section 14: Transport Information

DOT Shipping Name:	Potassium.	Canada TDG:	Potassium.
DOT Hazard Class:	4.3, pg I.	Hazard Class:	4.3, pg I.
Identification Number:	UN2257.	UN Number:	UN2257.

Section 15: Regulatory Information

EINECS: Listed (231-119-8) .

WHMIS Canada: B6, E: Reactive flammable material, Corrosive.

TSCA: All components are listed or are exempt.

California Proposition 65: Not listed.

The product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

Section 16: Other Information

Current Issue Date: September 22, 2012

Disclaimer: Scholar Chemistry and Columbus Chemical Industries, Inc., ("S&C") believes that the information herein is factual but is not intended to be all inclusive. The information relates only to the specific material designated and does not relate to its use in combination with other materials or its use as to any particular process. Because safety standards and regulations are subject to change and because S&C has no continuing control over the material, those handling, storing or using the material should satisfy themselves that they have current information regarding the particular way the material is handled, stored or used and that the same is done in accordance with federal, state and local law. S&C makes no warranty, expressed or implied, including (without limitation) warranties with respect to the completeness or continuing accuracy of the information contained herein or with respect to fitness for any particular use.



SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Selenium

Cat No. : AC419270000; AC419271000; AC419275000

Synonyms None

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Acute oral toxicity	Category 3
Acute Inhalation Toxicity - Dusts and Mists	Category 3
Specific target organ toxicity - (repeated exposure)	Category 2

Label Elements

Signal Word
Danger

Hazard Statements

Toxic if swallowed
Toxic if inhaled
May cause damage to organs through prolonged or repeated exposure



Precautionary Statements
Prevention

Wash face, hands and any exposed skin thoroughly after handling
 Do not eat, drink or smoke when using this product
 Use only outdoors or in a well-ventilated area
 Do not breathe dust/fume/gas/mist/vapors/spray

Response

Get medical attention/advice if you feel unwell

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
 Call a POISON CENTER or doctor/physician

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Rinse mouth

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

May cause long lasting harmful effects to aquatic life

3. Composition / information on ingredients

Component	CAS-No	Weight %
Selenium	7782-49-2	> 99.5

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Skin Contact	Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes.
Inhalation	Remove from exposure, lie down. Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. Immediate medical attention is required.
Ingestion	Do not induce vomiting. Never give anything by mouth to an unconscious person. Drink plenty of water. Call a physician immediately. If possible drink milk afterwards.
Most important symptoms/effects Notes to Physician	No information available. Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Water spray. Carbon dioxide (CO ₂). Dry chemical. chemical foam.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	No information available
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Vapors may form explosive mixtures with air.

Hazardous Combustion Products

None known

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
3

Flammability
0

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions

Ensure adequate ventilation. Use personal protective equipment.

Environmental Precautions

See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up Sweep up or vacuum up spillage and collect in suitable container for disposal.

7. Handling and storage

Handling

Avoid contact with skin and eyes. Do not breathe dust. Do not breathe vapors or spray mist. Use only in area provided with appropriate exhaust ventilation.

Storage

Keep in a dry, cool and well-ventilated place. Keep container tightly closed. Keep under nitrogen.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Selenium	TWA: 0.2 mg/m ³	(Vacated) TWA: 0.2 mg/m ³	IDLH: 1 mg/m ³ TWA: 0.2 mg/m ³

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Selenium	TWA: 0.2 mg/m ³	TWA: 0.2 mg/m ³	TWA: 0.2 mg/m ³

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures

Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment

Eye/face Protection

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection

A NIOSH/MSHA approved air purifying dust or mist respirator or European Standard EN 149.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder Solid
Appearance	Grey
Odor	No information available
Odor Threshold	No information available
pH	No information available
Melting Point/Range	217 - 222 °C / 422.6 - 431.6 °F
Boiling Point/Range	685 °C / 1265 °F
Flash Point	No information available
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	1 mmHg @ 345 °C
Vapor Density	No information available
Relative Density	4.810
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	Se
Molecular Weight	78.96

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products.
Incompatible Materials	Acids, Strong oxidizing agents, Fluorine, oxygen, Metals
Hazardous Decomposition Products	None under normal use conditions
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information No acute toxicity information is available for this product

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Selenium	6700 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Selenium	7782-49-2	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects	No information available
Reproductive Effects	No information available.
Developmental Effects	No information available.
Teratogenicity	No information available.
STOT - single exposure	None known
STOT - repeated exposure	None known
Aspiration hazard	No information available
Symptoms / effects,both acute and delayed	No information available
Endocrine Disruptor Information	No information available
Other Adverse Effects	The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Persistence and Degradability	No information available
Bioaccumulation/ Accumulation	No information available.
Mobility	No information available.

13. Disposal considerations

Waste Disposal Methods	Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.
-------------------------------	---

14. Transport information

DOT

UN-No	UN3283
Hazard Class	6.1
Packing Group	III

TDG

UN-No	UN3283
Hazard Class	6.1
Packing Group	III

IATA

UN-No	3283
Proper Shipping Name	SELENIUM COMPOUND, SOLID, N.O.S.
Hazard Class	6.1
Packing Group	III

IMDG/IMO

UN-No	3283
Proper Shipping Name	SELENIUM COMPOUND, SOLID, N.O.S.
Hazard Class	6.1
Packing Group	III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Selenium	X	X	-	231-957-4	-		X	-	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Selenium	7782-49-2	> 99.5	1.0

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	Yes
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Selenium	-	-	X	X

Clean Air Act Not applicable

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Selenium	X		-

OSHA Occupational Safety and Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Selenium	100 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals**State Right-to-Know**

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Selenium	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D1A Very toxic materials
D2B Toxic materials

**16. Other information**

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Revision Date 10-Feb-2015

Print Date 10-Feb-2015

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

SAFETY DATA SHEET

Version 4.11
Revision Date 03/05/2015
Print Date 02/07/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Sodium

Product Number : 483745
Brand : Aldrich

CAS-No. : 7440-23-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Substances and mixtures, which in contact with water, emit flammable gases (Category 1), H260
Skin corrosion (Category 1B), H314
Serious eye damage (Category 1), H318
Carcinogenicity (Category 1A), H350

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)
H260

In contact with water releases flammable gases which may ignite spontaneously.

H314 Causes severe skin burns and eye damage.

H318 Causes serious eye damage.

H350 May cause cancer.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202 Do not handle until all safety precautions have been read and understood.

P223 Keep away from any possible contact with water, because of violent reaction and possible flash fire.

P231 + P232	Handle under inert gas. Protect from moisture.
P260	Do not breathe dust or mist.
P264	Wash skin thoroughly after handling.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P281	Use personal protective equipment as required.
P301 + P330 + P331	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P310	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P305 + P351 + P338 + P310	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/ physician.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P335 + P334	Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.
P363	Wash contaminated clothing before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P402 + P404	Store in a dry place. Store in a closed container.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Reacts violently with water.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.2 Mixtures

Formula : Na
Molecular weight : 22.99 g/mol

Hazardous components

Component	Classification	Concentration
Sodium		
CAS-No. 7440-23-5	Water-react. 1; Skin Corr. 1B; Eye Dam. 1; H260, H314	≥ 90 - ≤ 100 %
EC-No. 231-132-9		
Index-No. 011-001-00-0		
Paraffin oils		
CAS-No. 8012-95-1	Carc. 1A; H350	≥ 90 - ≤ 100 %
EC-No. 232-384-2		

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Take off contaminated clothing and shoes immediately. Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician. Continue rinsing eyes during transport to hospital.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Dry powder

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water.

Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed. Keep away from sources of ignition - No smoking.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Never allow product to get in contact with water during storage.

Handle and store under inert gas. Air sensitive.

Storage class (TRGS 510): Hazardous materials, which set free flammable gases upon contact with water

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Paraffin oils	8012-95-1	STEL	10.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Upper Respiratory Tract irritation 2014 Adoption Not classifiable as a human carcinogen		
		Upper Respiratory Tract irritation 2014 Adoption Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Upper Respiratory Tract irritation Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		
		TWA	5.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Not classifiable as a human carcinogen		
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Upper Respiratory Tract irritation Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: Pieces |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 97.8 °C (208.0 °F) - lit. |
| f) Initial boiling point and boiling range | 883 °C (1,621 °F) - lit. |
| g) Flash point | 82 °C (180 °F) |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 0.97 g/cm ³ |

- | | |
|---|-------------------|
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Reacts violently with water.

10.4 Conditions to avoid

Air Do not allow water to enter container.
Exposure to moisture

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 1 - Group 1: Carcinogenic to humans (Paraffin oils)

NTP: Known to be human carcinogenThe reference note has been added by TD based on the background information of the NTP. (Paraffin oils)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available
No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., Aspiration may lead to:, lipid pneumonia, Effects due to ingestion may include:, laxative effect, Gastrointestinal disturbance, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1428 Class: 4.3 Packing group: I
Proper shipping name: Sodium
Reportable Quantity (RQ): 10 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1428 Class: 4.3 Packing group: I EMS-No: F-G, S-N
Proper shipping name: SODIUM

IATA

UN number: 1428 Class: 4.3 Packing group: I
Proper shipping name: Sodium
IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Reactivity Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Sodium	7440-23-5	1993-04-24
Paraffin oils	8012-95-1	2007-03-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Sodium	7440-23-5	1993-04-24
Paraffin oils	8012-95-1	2007-03-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Sodium	7440-23-5	1993-04-24
Paraffin oils	8012-95-1	2007-03-01

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer.	8012-95-1	1987-02-27
Paraffin oils		

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Carc.	Carcinogenicity
Eye Dam.	Serious eye damage
H260	In contact with water releases flammable gases which may ignite spontaneously.
H314	Causes severe skin burns and eye damage.
H318	Causes serious eye damage.
H350	May cause cancer.
Skin Corr.	Skin corrosion
Water-react.	Substances and mixtures, which in contact with water, emit flammable gases

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	4
Physical Hazard	2

NFPA Rating

Health hazard: 3
Fire Hazard: 4
Reactivity Hazard: 2
Special hazard.I: W

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.11

Revision Date: 03/05/2015

Print Date: 02/07/2016

SAFETY DATA SHEET

Version 4.6
Revision Date 04/24/2015
Print Date 02/08/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Vanadium

Product Number : 262935

Brand : Aldrich

CAS-No. : 7440-62-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture**

Not a hazardous substance or mixture.

2.2 GHS Label elements, including precautionary statements

Not a hazardous substance or mixture.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS**3.1 Substances**

Formula : V
Molecular weight : 50.94 g/mol
CAS-No. : 7440-62-2
EC-No. : 231-171-1

Hazardous components

Component	Classification	Concentration
Vanadium		<= 100 %

4. FIRST AID MEASURES**4.1 Description of first aid measures****If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration.

In case of skin contact

Wash off with soap and plenty of water.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Vanadium/vanadium oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Avoid dust formation. Avoid breathing vapours, mist or gas.

For personal protection see section 8.

6.2 Environmental precautions

No special environmental precautions required.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Handle and store under inert gas. Keep in a dry place.

Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Vanadium	7440-62-2	TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits

8.2 Exposure controls

Appropriate engineering controls

General industrial hygiene practice.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatrill® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatrill® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place. The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

No special environmental precautions required.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---------------------------|---|
| a) Appearance | Form: powder
Colour: grey |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing | Melting point/range: 1,890 °C (3,434 °F) - lit. |

point

- | | |
|---|--|
| f) Initial boiling point and boiling range | 3,380 °C (6,116 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 10.67 hPa (8.00 mmHg) at 20 °C (68 °F) |
| l) Vapour density | No data available |
| m) Relative density | 6.11 g/mL at 25 °C (77 °F) |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong acids, Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Carcinogenicity - Rat - Intramuscular

Tumorigenic: Equivocal tumorigenic agent by RTECS criteria. Tumorigenic: Tumors at site or application.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: YW1355000

metallic taste, greenish-black discoloration of the tongue, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

Not dangerous goods

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Vanadium	7440-62-2	2007-03-01

SARA 311/312 Hazards

No SARA Hazards

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Vanadium	7440-62-2	2007-03-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Vanadium	7440-62-2	2007-03-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Vanadium	7440-62-2	2007-03-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

HMIS Rating

Health hazard: 0

Chronic Health Hazard:

Flammability: 0

Physical Hazard 0

NFPA Rating

Health hazard: 0

Fire Hazard: 0

Reactivity Hazard: 0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 04/24/2015

Print Date: 02/08/2016

SAFETY DATA SHEET

Version 4.9
Revision Date 08/24/2015
Print Date 02/07/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Zinc

Product Number : 324930
Brand : Aldrich
Index-No. : 030-001-00-1

CAS-No. : 7440-66-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Self-heating substances and mixtures (Category 1), H251
Substances and mixtures, which in contact with water, emit flammable gases (Category 1), H260
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H251

Self-heating: may catch fire.

H260

In contact with water releases flammable gases which may ignite spontaneously.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P223

Do not allow contact with water.

P231 + P232

Handle under inert gas. Protect from moisture.

P235 + P410

Keep cool. Protect from sunlight.

P273

Avoid release to the environment.

P280	Wear protective gloves/ eye protection/ face protection.
P335 + P334	Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P402 + P404	Store in a dry place. Store in a closed container.
P407	Maintain air gap between stacks/ pallets.
P413	Store bulk masses greater than .? kg/ .? lbs at temperatures not exceeding .? °C/ .? °F.
P420	Store away from other materials.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Combustible dust

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Zn
Molecular weight	:	65.39 g/mol
CAS-No.	:	7440-66-6
EC-No.	:	231-175-3
Index-No.	:	030-001-00-1

Hazardous components

Component	Classification	Concentration
Zinc powder (pyrophoric)		
	Self-heat. 1; Water-react. 1; Aquatic Acute 1; Aquatic Chronic 1; H251, H260, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Dry powder

5.2 Special hazards arising from the substance or mixture

Zinc/zinc oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water. Keep in suitable, closed containers for disposal. Contain spillage, pick up with an electrically protected vacuum cleaner or by wet-brushing and transfer to a container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed. Keep away from sources of ignition - No smoking.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Never allow product to get in contact with water during storage.

Keep in a dry place.

Storage class (TRGS 510): Pyrophoric and self-heating hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Protective gloves against thermal risks

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Flame retardant protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: powder
Colour: grey |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 420 °C (788 °F) - lit. |
| f) Initial boiling point and boiling range | 907 °C (1,665 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | May form combustible dust concentrations in air |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 1 hPa (1 mmHg) at 487 °C (909 °F) |

- | | |
|---|---|
| l) Vapour density | No data available |
| m) Relative density | 7.133 g/mL at 25 °C (77 °F) |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | log Pow: 5 |
| p) Auto-ignition temperature | The substance or mixture is classified as self heating with the category 1. |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Reacts violently with water.

10.4 Conditions to avoid

Exposure to moisture

10.5 Incompatible materials

Strong acids and oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

Did not cause sensitisation on laboratory animals.

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as

probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: ZG8600000

chills, dry throat, sweet taste, Fever, Cough, Nausea, Vomiting, Weakness

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Cyprinus carpio (Carp) - 450.0 µg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates LC50 - Daphnia magna (Water flea) - 0.068 mg/l - 48 h

mortality NOEC - Daphnia (water flea) - 0.101 - 0.14 mg/l - 7 d

12.2 Persistence and degradability

12.3 Bioaccumulative potential

Bioaccumulation Algae - 7 d
at 16 °C - 5 µg/l

Bioconcentration factor (BCF): 466

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Contact a licensed professional waste disposal service to dispose of this material. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 1436 Class: 4.3 (4.2) Packing group: II
 Proper shipping name: Zinc powder
 Reportable Quantity (RQ): 1000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1436 Class: 4.3 (4.2) Packing group: II EMS-No: F-G, S-O
 Proper shipping name: ZINC POWDER
 Marine pollutant:yes

IATA

UN number: 1436 Class: 4.3 (4.2) Packing group: II
 Proper shipping name: Zinc powder

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

SARA 311/312 Hazards

Reactivity Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H251	Self-heating: may catch fire.
H260	In contact with water releases flammable gases which may ignite spontaneously.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Self-heat.	Self-heating substances and mixtures

HMIS Rating

Health hazard: 0

Chronic Health Hazard:
Flammability: 3
Physical Hazard 1

NFPA Rating

Health hazard: 0
Fire Hazard: 3
Reactivity Hazard: 1
Special hazard.I: W

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.9

Revision Date: 08/24/2015

Print Date: 02/07/2016

Thallium



SAFETY DATA SHEET

1 PRODUCT AND SUPPLIER IDENTIFICATION

Product Name: Thallium Solid

Formula: TI

Supplier: ESPI Metals
1050 Benson Way
Ashland, OR 97520

Telephone: 800-638-2581

Fax: 541-488-8313

Email: sales@espimetals.com

Emergency: Infotrac 800-535-5053 (US) or 352-323-3500 (24 hour)

Recommended Uses: Scientific Research

2 HAZARDS IDENTIFICATION

GHS Classification (29 CFR 1910.1200): Acute toxicity - oral, category 2.

GHS Label Elements:



Signal Word: Danger

Hazard Statements: H300 Fatal if swallowed.

Precautionary Statements: P264 Wash hands thoroughly after handling, P270 Do not eat, drink or smoke when using this product, P301+P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician, P330 Rinse mouth, P405 Store locked up, P501 Dispose of contents/container in accordance with local, state or federal regulations.

3 COMPOSITION/INFORMATION ON INGREDIENTS

Ingredient: Thallium
CAS#: 7440-28-0
%: 100
EC#: 231-138-1

4 FIRST AID MEASURES

General Measures: Emergency responders should take care to avoid secondary exposure to thallium if it is present. Wear appropriate protective equipment.

INHALATION: Remove to fresh air, keep warm and quiet, give oxygen if breathing is difficult. Seek immediate medical attention. If mouth-to-mouth is necessary always use a barrier or bag-valve-mask device.

INGESTION: Rinse mouth with water. Do not induce vomiting. Seek immediate medical attention. Never induce vomiting or give anything by mouth to an unconscious person.

SKIN: Remove contaminated clothing, wash affected area with soap and water taking care not to break the skin and to cover all open wounds. Seek medical attention. Contaminated clothing should be safely contained and properly disposed of.

EYES: Flush eyes with lukewarm water, including under upper and lower eyelids, for at least 15 minutes. Seek medical attention immediately.

Most Important Symptoms/Effects, Acute and Delayed: Symptoms are usually delayed and include gastrointestinal distress and neurological symptoms. See section 11 for more information.

Indication of Immediate Medical Attention and Special Treatment: No other information available.

5 FIREFIGHTING MEASURES

Extinguishing Media: Use extinguishing media suitable for surrounding materials and type of fire.

Unsuitable Extinguishing Media: No further information available.

Specific Hazards Arising from the Material: Under fire conditions, thallium may release highly toxic fumes or gases.

Special Protective Equipment and Precautions for Firefighters: Full face, self-contained breathing apparatus and full protective clothing.

6 ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment, and Emergency Procedures: Wear appropriate respiratory and protective equipment specified in section 8. Isolate spill area and provide ventilation. Avoid breathing dust or fume. Avoid contact with skin and eyes. Eliminate all sources of ignition.

Methods and Materials for Containment and Cleaning Up: Scoop up or vacuum with a system utilizing a HEPA filtration system and place in properly labeled sealed containers. Special precautions must be taken when changing filters on HEPA vacuum cleaners used to clean up hazardous materials. Avoid creating dusts. Avoid contamination of air and water.

Environmental Precautions: Do not allow to enter drains or to be released to the environment.

7 HANDLING AND STORAGE

Precautions for Safe Handling: Wear appropriate respiratory and protective equipment specified in section 8. Only trained personnel should work with this product. Handle in a well-ventilated area. Avoid exposure to high temperature. Avoid breathing fumes. Avoid contact with skin and eyes. Wash thoroughly before eating or smoking.

Conditions for Safe Storage, Including Any Incompatibilities: Store under dry, inert gas such as argon, or can also be stored under deaerated water. Store in sealed unbreakable containers; the original labeled shipping container when possible. Store in an area that is cool, dry and temperature-controlled, away from direct sunlight, heat and ignition sources or where freezing is possible. Do not store together with acids, halogens or oxidizers. See section 10 for more information on incompatible materials.

8 EXPOSURE CONTROLS AND PERSONAL PROTECTION

Exposure Limits: Thallium (Soluble compounds, as Tl)

OSHA/PEL: 0.1 mg/m³

ACGIH/TLV: 0.02 mg/m³(inhalable)

Appropriate Engineering Controls: Handle in an enclosed, controlled process under dry argon. Whenever possible the use of local exhaust ventilation, process enclosure or other engineering controls is the preferred method of controlling exposure to meet established occupational exposure limits. Use good housekeeping and sanitation practices. Do not use tobacco or food in work area. Wash thoroughly before eating or smoking. Clothing worn in areas of exposure to thallium dust or vapor should be restricted to the workplace and stored in special lockers.

Individual Protection Measures, Such as Personal Protective Equipment:

Respiratory Protection: When potential exposures are above the occupational limits, approved respirators must be used.

Eye Protection: Splash goggles or safety glasses.

Skin Protection: Wear impermeable gloves, protective work clothing as necessary.

9 PHYSICAL AND CHEMICAL PROPERTIES

Appearance:

Form: Rod

Color: Gray metallic

Odor: Odorless

Odor Threshold:	Not determined
pH:	N/A
Melting Point:	303.5 °C
Boiling Point:	1457±10 °C
Flash Point:	N/A
Evaporation Rate:	N/A
Flammability:	No data
Upper Flammable Limit:	No data
Lower Flammable Limit:	No data
Vapor Pressure:	1 mm Hg @ 825 °C
Vapor Density:	N/A
Relative Density (Specific Gravity):	11.85 g/cc
Solubility in H₂O:	Insoluble
Partition Coefficient (n-octanol/water):	Not determined
Autoignition Temperature:	No data
Decomposition Temperature:	No data
Viscosity:	N/A

10 STABILITY AND REACTIVITY

Reactivity: No data

Chemical Stability: Stable under recommended storage conditions.

Possibility of Hazardous Reactions: High temperatures will generate toxic thallium oxide fumes.

Conditions to Avoid: Avoid high temperatures, reacts slowly with moist air.

Incompatible Materials: Oxidizing agents, strong acids, halogens, air and moisture.

Hazardous Decomposition Products: Thallium oxide fume.

11 TOXICOLOGICAL INFORMATION

Likely Routes of Exposure: Inhalation, skin and eyes.

Symptoms of Exposure: Abdominal pain and vomiting, extreme pain in the extremities, lethargy, hair loss.

Acute and Chronic Effects: Almost all of the available information refers to ingestion of thallium compounds, largely due to accidental ingestion, intentional poisoning and suicide attempts. Adverse reactions are dose dependent and occur in 3 stages. Massive doses may cause gastrointestinal distress (nausea, vomiting and abdominal pain) within 30 minutes but symptoms are usually delayed for 8 hours or longer. Gastrointestinal symptoms from smaller doses may

be delayed 24-48 hours. This is followed by neurological effects 2-5 days or even longer after ingestion, although it may occur as early as 12 hours after massive exposure. Other effects include hair loss, severe pain in the extremities, lethargy, ataxia, back pain, abnormal reflexes, neuropathy, muscle weakness, mental abnormalities, tremors, abnormal vision, headache, coma, convulsion, and death. There was no information available for exposure to thallium metal specifically rather than thallium compounds, and little conclusive information regarding exposure via inhalation.

Acute Toxicity: No data

Carcinogenicity: **NTP:** Not identified as carcinogenic **IARC:** Not identified as carcinogenic

To the best of our knowledge the chemical, physical and toxicological characteristics of the substance are not fully known.

12 ECOLOGICAL INFORMATION

Ecotoxicity: LC50 - *Cyprinodon variegatus* (sheepshead minnow) - 21.0 mg/l - 96.0 h

Persistence and Degradability: No data

Bioaccumulative Potential: No data

Mobility in Soil: No data

Other Adverse Effects: Do not allow material to be released to the environment. No further relevant information available.

13 DISPOSAL CONSIDERATIONS

Waste Disposal Method:

Product: Dispose of in accordance with Federal, State and Local regulations.

Packaging: Dispose of in accordance with Federal, State and Local regulations.

14 TRANSPORT INFORMATION

UN Number: UN3288

UN Proper Shipping Name: Toxic solid, inorganic, n.o.s. (Thallium)

Transport Hazard Class: 6.1

Packing Group: II

Marine Pollutant: Yes

15 REGULATORY INFORMATION

TSCA Listed: All components are listed.

Regulation (EC) No 1272/2008 (CLP): Acute toxicity - oral, category 2, Hazardous to the aquatic environment - acute hazard, category 3, Hazardous to the aquatic environment - chronic hazard, category 3.

Canada WHMIS Classification (CPR, SOR/88-66): Acute toxicity.

HMIS Ratings: Health: 3 **Flammability:** 0 **Physical:** 0

NFPA Ratings: Health: 3 **Flammability:** 0 **Instability:** 0

Chemical Safety Assessment: A chemical safety assessment has not been carried out.

16 OTHER INFORMATION

The information contained in this document is based on the state of our knowledge at the time of publication and is believed to be correct, but does not purport to be all inclusive and shall be used only as a guide. ESPI Metals makes no representation, warranty, or guarantee of any kind with respect to the information contained in this document or any use of the product based on this information. ESPI Metals shall not be held liable for any damages resulting from handling or from contact with the above product. Users should satisfy themselves that they have all current data relevant to their particular use.

Prepared by: ESPI Metals

Revised/Reviewed: July 2015

ATTACHMENT F

JOBSITE SAFETY INSPECTION CHECKLIST

Jobsite Safety Inspection Checklist

Date: _____ **Inspected By:** _____

Location: _____ **Project #:** _____

Check one of the following: **A:** Acceptable **NA:** Not Applicable **D:** Deficiency

	A	NA	D	Remark
1. CHASP available onsite for inspection?				
2. Health & Safety Compliance agreement (in CHASP) appropriately signed by Langan employees and contractors?				
3. Hospital route map with directions posted on site?				
4. Emergency Notification List posted on site?				
5. First Aid kit available and properly stocked?				
6. Personnel trained in CPR/First Aid on site?				
7. MSDSs readily available, and all workers knowledgeable about the specific chemicals and compounds to which they may be exposed?				
8. Appropriate PPE being worn by Langan employees and contractors?				
9. Project site safe practices ("Standing Orders") posted?				
10. Project staff have 40-hr./8-hr./Supervisor HAZWOPER training?				
11. Project staff medically cleared to work in hazardous waste sites and fit-tested to wear respirators, if needed?				
12. Respiratory protection readily available?				
13. Health & Safety Incident Report forms available?				
14. Air monitoring instruments calibrated daily and results recorded on the Daily Instrument Calibration check sheet?				
15. Air monitoring readings recorded on the air monitoring data sheet/field log book?				
16. Subcontract workers have received 40-hr./8-hr./Spvsr. HAZWOPER training, as appropriate?				
17. Subcontract workers medically cleared to work on site, and fit-tested for respirator wear?				
18. Subcontract workers have respirators readily available?				
19. Mark outs of underground utilities done prior to initiating any subsurface activities?				
20. Decontamination procedures being followed as outlined in CHASP?				
21. Are tools in good condition and properly used?				
22. Drilling performed in areas free from underground objects including utilities?				

23. Adequate size/type fire extinguisher supplied?				
24. Equipment at least 20 feet from overhead powerlines?				
25. Evidence that drilling operator is responsible for the safety of his rig.				
26. Trench sides shored, layer back, or boxed?				
27. Underground utilities located and authorities contacted before digging?				
28. Ladders in trench (25-foot spacing)?				
29. Excavated material placed more than 2 feet away from excavation edge?				
30. Public protected from exposure to open excavation?				
31. People entering the excavation regarding it as a permit-required confined space and following appropriate procedures?				
32. Confined space entry permit is completed and posted?				
33. All persons knowledgeable about the conditions and characteristics of the confined space?				
34. All persons engaged in confined space operations have been trained in safe entry and rescue (non-entry)?				
35. Full body harnesses, lifelines, and hoisting apparatus available for rescue needs?				
36. Attendant and/or supervisor certified in basic first aid and CPR?				
37. Confined space atmosphere checked before entry and continuously while the work is going on?				
38. Results of confined space atmosphere testing recorded?				
39. Evidence of coordination with off-site rescue services to perform entry rescue, if needed?				
40. Are extension cords rated for this work being used and are they properly maintained?				
41. Are GFCIs provided and being used?				

Unsafe Acts:

Notes:

ATTACHMENT G

JOB SAFETY ANALYSIS FORM



Job Safety Analysis (JSA) Health and Safety

JSA TITLE:

JSA NUMBER:

DATE CREATED:

CREATED BY:

REVISION DATE:

REVISED BY:

Langan employees must review and revise the Job Safety Analysis (JSA) as needed to address the any site specific hazards not identified. Employees must provide their signatures on the last page of the JSA indicating they have review the JSA and are aware the potential hazards associated with this work and will follow the provided preventive or corrective measures.

PERSONAL PROTECTIVE EQUIPMENT REQUIRED: (PPE): Required As Needed

- | | | |
|---|--|--|
| <input type="checkbox"/> Steel-toed boots | <input type="checkbox"/> Nitrile gloves | <input type="checkbox"/> Dermal Protection (Specify) |
| <input type="checkbox"/> Long-sleeved shirt | <input type="checkbox"/> Leather/ Cut-resistant gloves | <input type="checkbox"/> High visibility vest/clothing |
| <input type="checkbox"/> Safety glasses | <input type="checkbox"/> Face Shield | <input type="checkbox"/> Hard hat |

ADDITIONAL PERSONAL PROTECTIVE EQUIPMENT NEEDED (Provide specific type(s) or descriptions)

- | | | |
|---|---------------------------------------|---------------------------------|
| <input type="checkbox"/> Air Monitoring: | <input type="checkbox"/> Respirators: | <input type="checkbox"/> Other: |
| <input type="checkbox"/> Dermal Protection: | <input type="checkbox"/> Cartridges: | <input type="checkbox"/> Other: |

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
1.	1. 2.	1a. 1b. 2a. 2b.
2.	1.	1
Additional items identified in the field.		
Additional Items.		

If additional items are identified during daily work activities, please notify all relevant personnel about the change and document on this JSA.

<h1>LANGAN</h1>	JSA NUMBER:	OFFICE:
	DATE: 08/04/10	PROJECT MANAGER:
	REVISION DATE: 7/28/11	SAFETY OFFICER:
SITE:	PERSON(S) PERFORMING JOB:	ANALYSIS BY:
JOB TITLE OR TASK: Direct-Push Soil Borings		REVIEWED BY: Tony Moffa
REQUIRED PERSONAL PROTECTIVE EQUIPMENT (PPE) AND/OR PERTINENT JOB SAFETY FORMS:		
Minimum PPE:	Steel-toed boots, long-sleeved shirt, nitrile gloves, safety glasses, hard hat	
Additional PPE (as needed):	Cut-resistant or work gloves, Tyvek sleeves, high visibility vest	
Monitoring Equipment:	Photo-ionization detector (PID)	
Job Safety Form:	Tailgate Meeting	

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
1. Daily Tailgate Safety Meeting	1. None	1. All employees assigned to this task will attend a daily tailgate safety meeting, which will include the pertinent JSA's, Standard Operating Procedures (SOPs), types of potential hazards, and actual hazards present and controls for those hazards.
2. Move equipment to work site	1. Back strain when lifting heavy equipment 2. Slips/trips/falls while moving equipment 3. Traffic (if applicable) 4. Pinched fingers or running over toes during geoprobe set-up	1a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads greater than 50 lbs. 1b. Minimize distance to vehicle 2a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads greater than 50 lbs. 2b. Minimize distance to vehicle 2c. Have unobstructed path to vehicle or collection point 2d. Do not lift/walk with boxes that are heavy/difficult to lift 3. Wear high visibility vests and exercise caution. 4a. Wear proper PPE (cut-resistant gloves)

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
2. Move equipment to work site (continued)	5. Overturn drill rig while transporting to loading dock on flat-bed tow truck	4b. Stay alert, be aware of geoprobe rig at all times 5a. Drill rig should be parked in center of flat-bed tow truck 5b. Emergency brake shall be used at all times during transport on the flat-bed truck 5c. All unnecessary personnel should stay away from the flat-bed truck during moving activities
3. Set-up geoprobe rig at desired location	1. Slips/trips/falls while moving equipment 2. Pinched fingers or running over toes during geoprobe set-up 3. Clothing entanglement 4. Electrocution/falling equipment and debris from raising geoprobe rig mast 5. Carbon monoxide poisoning 6. Geoprobe rig roll-over 7. Geoprobe rig movement	1a. All personnel should be constantly watching for trip hazards, such as uneven terrain, holes, ditches, stretched wires or ropes or other materials in their path 1b. Proper housekeeping of materials during sampling events 1c. Mark significant below-grade hazards (i.e. holes, trenches) with safety cones or spray paint 2a. Wear proper PPE (cut-resistant gloves) 2b. Stay alert, be aware of geoprobe rig at all times 3. Wear proper attire for geoprobe rig (no loose clothing, strings, etc.) 4a. Wear proper PPE (hard hats) 4b. Be aware of locations at all times; look up, down and around before raising mast 4c. Check geoprobe drill rig mast prior to raising for loose objects/debris 5. Properly ventilate exhaust from geoprobe rig when working indoors or in areas of poor ventilation 6a. Do not move rig with mast raised 6b. Set stabilizers prior to raising mast, if applicable 6c. Inspect work area; if area appears unstable, area should be assessed by a qualified professional engineer or the MIP boring location should be moved 7a. All field personnel should stay clear of the geoprobe rig while moving 7b. Use a spotter when backing up the geoprobe rig

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
<p>4. Advance geoprobe rods below ground surface to desired depth</p> <p>4. Advance geoprobe/MIP rods below ground surface to desired depth (continued)</p>	<p>1. Strain wrist/bruise palm while preparing geoprobe rods</p> <p>2. Pinched fingers while preparing geoprobe/MIP rods</p> <p>3. Injury due to encountering below grade utilities</p> <p>4. Back strain while preparing geoprobe rods</p> <p>5. Clothing entanglement while advancing geoprobe rods</p> <p>6. Carbon monoxide poisoning</p> <p>7. Bruised/broken toes/feet from dropping equipment and geoprobe rods</p> <p>8. High noise levels</p> <p>9. Injury from faulty equipment</p>	<p>1a. Wear proper PPE (cut-resistant gloves)</p> <p>1b. Use proper technique for preparing geoprobe rods; use second person if necessary</p> <p>2. Wear proper PPE (cut-resistant gloves)</p> <p>3a. Markout all utilities prior to advancing the MIP boring using utility plans, geophysical contractor, or site personnel knowledge</p> <p>3b. Clear all subsurface soil borings to a minimum of 5 feet below grade</p> <p>4. Use proper lifting technique (use legs for bending and lifting and not the back); obtain assistance if needed</p> <p>5. Wear proper attire for geoprobe rig (no loose clothing, strings, etc.)</p> <p>6. Properly ventilate exhaust from geoprobe rig when working indoors or in areas of poor ventilation</p> <p>7. Wear proper PPE (steel-toe boots); Work in a safe manner to prevent dropped rod</p> <p>8. Wear proper PPE (hearing protection)</p> <p>9. Geoprobe contractor shall inspect all equipment prior to use</p>
<p>5. Remove and open acetate liner</p>	<p>1. Pinched fingers while removing macrocore</p> <p>2. Cuts/lacerations when cutting acetate liner open</p> <p>3. Exposure to hazardous vapors</p> <p>4. Skin contact with contaminated soil</p>	<p>1. Wear proper PPE (nitrile and cut-resistant gloves)</p> <p>2a. OPEN BLADES ARE PROHIBITED FROM USE AT THE SITE; use acetate liner cutting tool</p> <p>2b. Wear proper PPE (cut-resistant gloves)</p> <p>2c. Cut acetate liner away from body</p> <p>3a. Do not place face over acetate liner when opening</p> <p>3b. Monitor hazardous vapors in air with PID; upgrade PPE as necessary based on levels contained in the Health and Safety Plan</p> <p>4. Wear proper PPE (nitrile gloves)</p>
<p>6. Remove soil from acetate liner and place in a 55-gallon drum</p>	<p>1. Cuts/lacerations from acetate liner</p> <p>2. Pinched fingers/hand while opening/closing 55-gallon drum</p> <p>3. Skin contact with contaminated soil</p> <p>4. Soil debris in eyes</p>	<p>1. Wear proper PPE (cut-resistant gloves)</p> <p>2a. Wear proper PPE (cut-resistant gloves)</p> <p>2b. Keep fingers/hands away from pinch points</p> <p>3. Wear proper PPE (nitrile gloves)</p> <p>4. Wear proper PPE (safety glasses)</p>

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
7. Repeat steps 4 and 5 until desired depth is reached	1. See Steps 4 and 5	1. See Steps 4 and 5
8. Remove geoprobe rods and place in storage rack 8. Remove geoprobe rods and place in storage rack (continued)	1. Clothing entanglement while removing geoprobe rods 2. Back strain while removing geoprobe rods 3. Pinched fingers while removing geoprobe rods 4. Carbon monoxide poisoning 5. High noise levels 6. Injury from faulty equipment	1. Wear proper attire for geoprobe rig (no loose clothing, strings, etc.) 2. Use proper lifting technique (use legs for bending and lifting and not the back); obtain assistance if needed 3. Wear proper PPE (cut-resistant gloves) 4. Properly ventilate exhaust from geoprobe rig when working indoors or in areas of poor ventilation 5. Wear proper PPE (hearing protection) 6. Geoprobe contractor shall inspect all equipment prior to use
9. Tremie-grout borehole with a cement-bentonite grout mixture	1. Splashed cement-bentonite grout on face/eyes 2. Injury from faulty equipment 3. Back strain while mixing cement/bentonite grout 4. Pinched fingers while using grout mixer	1. Wear proper PPE (safety glasses) 2. Geoprobe contractor shall inspect all equipment prior to use 3. Use proper lifting/bending technique (use legs for bending and lifting and not the back); obtain assistance if needed 4. Wear proper PPE (nitrile gloves and cut-resistant gloves)
10. Decontaminate geoprobe rods	1. Splashed decontamination water on face/eyes 2. Back strain while decontaminating geoprobe rods	1. Wear proper PPE (safety glasses) 2. Use proper lifting/bending technique (use legs for bending and lifting and not the back); obtain assistance if needed
11. Patch soil boring location to return to pre-existing conditions (e.g. concrete, asphalt, grass)	1. Cuts or lacerations from cutting concrete/asphalt bag 2. Splashed concrete on eyes/face during mixing 3. Hammer fingers/hands when patching asphalt	1. OPEN BLADES ARE PROHIBITED FROM USE AT THE SITE ; use scissors. 2. Wear proper PPE (safety glasses) 3a. Wear proper PPE (cut-resistant gloves) 3b. Be aware of hands/fingers during hammering

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
12. Pack up equipment	1. Back strain when lifting heavy equipment 2. Slips/trips/falls while moving equipment 3. Traffic (if applicable) 4. Pinched fingers or running over toes during geoprobe set-up	1a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads greater than 50 lbs. 1b. Minimize distance to vehicle 2a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads greater than 50 lbs. 2b. Minimize distance to vehicle 2c. Have unobstructed path to vehicle or collection point 2d. Do not lift/walk with boxes that are heavy/difficult to lift 3. Wear high visibility vests and exercise caution. 4a. Wear proper PPE (cut-resistant gloves) 4b. Stay alert, be aware of geoprobe rig at all times
13. Transport drums to central staging location	1. Back, arm or shoulder strain from moving drums 2. Pinch fingers/hand in drum cart when moving drums 3. Pinch fingers/hand when operating lift-gate on vehicle 4. Contact with potentially contaminated groundwater when moving improperly sealed drums 5. Slips when moving drum 6. Drop drum on feet/toes	1. Use drum cart for moving drums; keep back in neutral position while raising barrel with drum cart; obtain assistance when moving the drum, if needed 2. Wear proper PPE (cut-resistant gloves); keep fingers away from pinch-points 3. Wear proper PPE (cut-resistant gloves); keep fingers away from pinch-points 4. Wear proper PPE (nitrile gloves under work gloves); properly seal drum to prevent leaks 5. Make sure route to move drum and storage space is dry and free from obstructions 6. Wear proper PPE (steel-toe shoes); Work in a safe manner to prevent dropped drum

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
14. All activities	1. Slips, Trips, and Falls 2. Hand injuries during manual handling of materials 3. Foot injuries 4. Back injuries 5. Vehicular traffic	1a. All personnel should be constantly watching for trip hazards, such as uneven terrain, holes, ditches, stretched wires or ropes or other materials in their path 1b. Proper housekeeping of materials during sampling events 1c. Mark significant below-grade hazards (i.e. holes, trenches) with safety cones or spray paint 1d. Wear proper footwear for terrain and scope of work (steel-toe boots) 1e. Rainy, snowy, or icy conditions will warrant a more cautious work attitude. Employees should change work speed and style to fit the weather conditions 2a. Workers should inspect materials for jagged or sharp edges, and rough or slippery surfaces 2b. Workers should keep fingers away from pinch and shear points, especially when setting down materials 2c. Workers should wipe off greasy, wet, slippery or dirty objects before attempting to handle them 2d. Cut-resistant gloves should be worn at all times except when the gloves create a hindrance to completing the task in a safe manner 3. Steel-toed boots should be used for protection of the feet 4a. All three main factors in manual lifting (load location, task repetition, and load weight) must be considered when evaluating what is safe or unsafe to lift; obtain assistance when possible 4b. All manual lifting of heavy or bulky objects shall be carefully planned to avoid injuries or damage to equipment 5. Employees shall wear high-visibility shirts or safety vests when performing work in high traffic areas; use cones where appropriate to designate work area; notify building occupants and fork lift operators of work areas

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
14. All activities (continued)	6. Wildlife a. Stray dogs b. Mice/rats c. Vectors (i.e. mosquitoes, bees, etc.) 7. Heat Stress/Cold Stress 8. Crime	6a. Employees shall be aware of their surroundings at all times, including the presence of wildlife 6b. Employees shall not approach any stray dogs 6c. Employees shall carry/use Halt in the event a stray dog may attack 6d. Use bug spray when needed 6e. Employees shall wear long-sleeve shirts during all activities at the site 7. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather); drink plenty of fluids to avoid dehydration; take breaks as necessary to avoid heat/cold stress 8. Employees shall be aware that the site is in a high crime area and work shall be performed in pairs, particularly in isolated areas of the facility and surrounding area
Additional items identified in the field.		
Additional Items.		
<p>If additional items are identified during daily work activities, please notify all relevant personnel about the change and document on this JSA.</p>		

Date of JSA review: _____

Print Name	Sign Name	Company
		Langan
		Langan

Task: Direct-Push Soil Borings

JSA No.:

		Langan

LANGAN	JSA NUMBER:	OFFICE:
	DATE:	PROJECT MANAGER:
REVISION DATE: 08/06/12	SAFETY OFFICER:	
SITE:	PERSON(S) PERFORMING JOB:	ANALYSIS BY:
JOB TITLE OR TASK: Environmental Sampling		REVIEWED BY: Tony Moffa
REQUIRED PERSONAL PROTECTIVE EQUIPMENT (PPE) AND/OR PERTINENT JOB SAFETY FORMS:		
Minimum PPE: Safety Glasses, Hard Hat, Steel toe boots, Sleeved shirt and pants		
Additional PPE (as needed): Leather and/or Nitrile gloves, Hearing protection, Traffic/Safety vest		
Monitoring Equipment (as needed):		
Job Safety Form:		

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
1. Daily Tailgate Safety Meeting	None	All employees assigned to this task will attend a daily tailgate safety meeting, which will include the pertinent JSA's,
2. Unpack Equipment	<ol style="list-style-type: none"> Slip, trips, and falls Physical hazards including strains and hand injury 	<ol style="list-style-type: none"> Be aware of hazards in area, place orange safety cones in areas of potential STF's could occur. Where possible, remove tripping hazards. Use proper lifting and bending techniques and do not lift heavy loads without assistance, use assistance as necessary. Avoid putting hands near pinch points. Wear leather work gloves when handling equipment of other heavy materials. Use proper cutting tool to open cardboard boxes.
3. Initial Site Arrival- Assess Site Conditions	<ol style="list-style-type: none"> Traffic 	<ol style="list-style-type: none"> Be alert. Secure area from through traffic

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
4. Collect Sanitary Sewer Samples a. Open/close manhole covers	1. Explosive Environment 2. Covers falling on fingers and toes 3. Muscle strain	1. Explosive conditions require use of safe equipment at all times. Identify escape route. 2. Wear appropriate PPE. Use tools to remove cover. 3. Use proper ergonomics when lifting heavy objects; use appropriate mechanical assistance and tools when possible to pry and lift off covers.
5. Collecting soil gas samples	1. Encountering electric and gas utility lines.	1. Before probing, have all utilities located. Identify escape route,
6. Collecting soil samples	1. Encountering electric and gas utility lines, 2. Slip/trip hazards	1. Have all utilities located; 2. Be Alert. Position pumps and other sampling equipment in an orderly and safe fashion.
7. Icing samples. Transporting coolers and equipment.	1. Slip Hazard 2. Muscle and back injury	1. Drain water away from coolers. Wear proper PPE, such as boots. 3. Use proper ergonomics when lifting and moving coolers and equipment
8. Leaving the site	1. Contaminated vehicle/ PPE	1. Wash hands promptly. Contaminated PPE should be disposed of on-site. Remove boots and soiled clothing for secure storage in trunk.
Additional items identified in the field.		
Additional Items.		
<p>If additional items are identified during daily work activities, please notify all relevant personnel about the change and document on this JSA.</p>		

Date of JSA review: _____

Print Name	Sign Name	Company
		Langan
		Langan
		Langan

LANGAN	JSA NUMBER:	OFFICE:
	DATE:	PROJECT MANAGER:
SITE:	REVISION DATE: 08/06/12	SAFETY OFFICER:
JOB TITLE OR TASK: Field Sampling	PERSON(S) PERFORMING JOB:	ANALYSIS BY:
		REVIEWED BY: Tony Moffa
REQUIRED PERSONAL PROTECTIVE EQUIPMENT (PPE) AND/OR PERTINENT JOB SAFETY FORMS:		
Minimum PPE: Safety Glasses, Hard Hat, Steel toe boots, Sleeved shirt and pants		
Additional PPE (as needed): Leather and/or Nitrile gloves, Hearing protection, Traffic/Safety vest		
Monitoring Equipment (as needed):		
Job Safety Form:		

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
1. Daily Tailgate Safety Meeting	None	All employees assigned to this task will attend a daily tailgate safety meeting, which will include the pertinent JSA's,
2. Unpack Equipment	<ol style="list-style-type: none"> 1. Slip, trips, and falls 2. Physical hazards including strains and hand injury 	<ol style="list-style-type: none"> 1. Be aware of hazards in area, place orange safety cones in areas of potential STF's could occur. Where possible, remove tripping hazards. 2. Use proper lifting and bending techniques and do not lift heavy loads without assistance, use assistance as necessary.
3. Initial Site Arrival- Assess Site Conditions	<ol style="list-style-type: none"> 1. Traffic 	<ol style="list-style-type: none"> 1. Be alert. Secure area from through traffic
4. Surface water sampling	<ol style="list-style-type: none"> 1. Contaminated media. Skin/eye contact with biological agents and chemicals 	<ol style="list-style-type: none"> 1. Wear site appropriate PPE. Review MSDS for all chemicals being handled.
5. Sampling from bridges	<ol style="list-style-type: none"> 1. Struck by vehicles 	<ol style="list-style-type: none"> 1. Wear safety vest. Use buddy system
6. Icing samples. Transporting coolers and equipment.	<ol style="list-style-type: none"> 1. Slip Hazard 2. Muscle and back injury 	<ol style="list-style-type: none"> 1. Drain water away from coolers. Wear proper PPE, such as boots. 1. Use proper ergonomics when lifting and moving coolers and equipment

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
7. Leaving the site	1. Contaminated vehicle/ PPE	1. Wash hands promptly. Contaminated PPE should be disposed of on-site. Remove boots and soiled clothing for secure storage in trunk.
Additional items identified in the field.		
Additional Items.		
<p>If additional items are identified during daily work activities, please notify all relevant personnel about the change and document on this JSA.</p>		

Date of JSA review: _____

Print Name	Sign Name	Company
		Langan
		Langan
		Langan

--	--	--

JSA Title: Groundwater Sampling

JSA Number: JSA008-01

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventative/corrective actions.

PERSONAL PROTECTIVE EQUIPMENT (Required or to be worn as needed):

<input checked="" type="checkbox"/> Safety Shoes	<input checked="" type="checkbox"/> Long Sleeves	<input checked="" type="checkbox"/> Safety Vest (Class 2)	<input checked="" type="checkbox"/> Hard Hat	<input checked="" type="checkbox"/> Hearing Protection
<input checked="" type="checkbox"/> Safety Glasses	<input type="checkbox"/> Safety Goggles	<input type="checkbox"/> Face Shield	<input checked="" type="checkbox"/> Nitrile Gloves	<input type="checkbox"/> PVC Gloves
<input checked="" type="checkbox"/> Leather Gloves	<input type="checkbox"/> Cut Resist. Gloves	<input checked="" type="checkbox"/> Fall Protection	<input type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input type="checkbox"/> Insect/Animal Repellent	<input type="checkbox"/> Ivy Blocker/Cleaner	<input type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	

Other: Tyvek sleeves, Dermal Protection, PID

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
1. Transport equipment to work area	<ol style="list-style-type: none"> Back Strain Slips/ Trips/ Falls Traffic Cuts/abrasions from equipment Contusions from dropped equipment 	<ol style="list-style-type: none"> Use proper lifting techniques / Use wheeled transport Minimize distance to work area / Have unobstructed path to work area / Follow good housekeeping procedures Wear proper PPE (high visibility vest or clothing) Wear proper PPE (leather gloves, long sleeves) Wear proper PPE (safety shoes)
2. Remove well cover	<ol style="list-style-type: none"> Scrape knuckles/hand Strain wrist/bruise palm Pinch fingers or hand 	<ol style="list-style-type: none"> Wear proper PPE (leather gloves) Using a hammer, tap the end of the wrench to loosen grip of bolts Wear proper PPE (leather gloves)
3. Remove well cap and lock	<ol style="list-style-type: none"> Well can pops from pressure Exposure to hazardous substances through inhalation or dermal exposure Scrape knuckles/hand Strain write/bruise palm 	<ol style="list-style-type: none"> Remove cap slowly to relieve pressure / Do not place face over well when opening / Wear proper PPE (safety glasses) Use direct air monitoring/reading instrument (i.e. PID) / Be familiar with and follow actions prescribed in the HASP / Wear proper PPE (nitrile gloves) Wear proper PPE (leather gloves) Using hammer, tap the end of the wrench to loosen grip
4. Measure head-space vapor levels	<ol style="list-style-type: none"> Exposure to hazardous substances through inhalation 	<ol style="list-style-type: none"> Do not place face over well when collecting measurement
5. Remove deciated tubing (if necessary)	<ol style="list-style-type: none"> Exposure to hazardous substances through inhalation or dermal exposure Tubing swings around after removal 	<ol style="list-style-type: none"> Wear proper PPE (nitrile gloves, Tyvek sleeves) Wear proper PPE (safety glasses)
6. Set-up plastic sheeting for work site around the well	<ol style="list-style-type: none"> Lacerations when cutting plastic sheeting 	<ol style="list-style-type: none"> Use scissors to cut plastic sheeting / Cut motions should always be away from body and body parts
7. Measure depth to water	<ol style="list-style-type: none"> Exposure to hazardous substances through inhalation or dermal exposure Pinch fingers or hand in water level instrument 	<ol style="list-style-type: none"> Wear proper PPE (nitrile gloves) Wear proper PPE (leather gloves)

JSA Title: Groundwater Sampling

JSA Number: JSA008-01

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
8. Calibrate monitoring equipment	<ol style="list-style-type: none"> 1. Skin or eye contact with calibration chemicals 2. Pinch fingers or hand in monitoring equipment 	<ol style="list-style-type: none"> 1. Wear proper PPE (safety glasses, nitrile gloves) 2. Wear proper PPE (leather gloves) / Avoid pinch points
9. Install sampling pump in well	<ol style="list-style-type: none"> 1. Hand injuries during installation of pump 2. Lacerations when cutting tubing 3. Back strain during installation of pump 4. Physical hazards associated with manual lifting of heavy equipment 5. Back strain from starting generator 6. Burns from hot exhaust from generator 7. Electrical shock from improper use of generator and pump 8. Contaminated water spray from loose connections 	<ol style="list-style-type: none"> 1. Wear proper PPE (leather gloves, nitrile gloves) 2. Use safety tubing cutter 3. Use proper lifting techniques 4. Use proper lifting techniques / Use wheeled transport for heavy equipment 5. Use arm when starting generator / Do not over-strain if generator does not start 6. Do not touch generator near exhaust / Use proper handle to carry / Allow generator to cool down before moving 7. Properly plug in pump to generator / Do not allow the pump or generator to contact water / Check for breaks in the cord 8. Check all tubing connections to ensure they are tight and secure
10. Purge water	<ol style="list-style-type: none"> 1. Contact with potentially contaminated groundwater 2. Back strain from lifting buckets of water 3. Tripping potential on sample discharge lines and pump electric line 	<ol style="list-style-type: none"> 1. Wear proper PPE (safety glasses, nitrile gloves) 2. Use proper lifting techniques / Use wheeled transport 3. Organize discharge of electric line to keep out of way as much as possible / Mark potential tripping hazards with caution tape or safety cones
11. Sample water collection	<ol style="list-style-type: none"> 1. Contact with potentially contaminated groundwater through dermal exposure 2. Contact with and burns from acid used for sample preservation 3. Tripping potential on sample discharge lines and pump electric line 4. Lacerations from broken sample bottles 5. Back strain when transporting coolers full of collected samples 6. Slips/ Trips/ Falls 	<ol style="list-style-type: none"> 1. Wear proper PPE (safety glasses, nitrile gloves) 2. Wear proper PPE (safety glasses, nitrile gloves) / Ensure sample bottle lids are secure before use and after sample collection 3. Organize line to keep out of the way as much as possible / Mark potential tripping hazards with caution tape or safety cones 4. Do not over-tighten bottle caps / Handle bottles safely to prevent breakage / Wrap glass bottles in bubble wrap, if possible 5. Use proper lifting techniques / Use wheeled transport / Seek assistance if coolers weight exceeds 50lbs. / Minimize distance to vehicle 6. Have unobstructed path to vehicle or collection point / Follow good housekeeping procedures / Do not lift/walk with coolers that are too heavy/difficult to lift
12. Remove pump and pack up equipment	<ol style="list-style-type: none"> 1. Back strain when removing pump or lifting heavy equipment 	<ol style="list-style-type: none"> 1. Use proper lifting technique / Use wheeled transport for heavy equipment
13. Replace well cap and lock	<ol style="list-style-type: none"> 1. Scrape fingers/hand 2. Strain wrist/bruise palm 	<ol style="list-style-type: none"> 1. Wear proper PPE (leather gloves) 2. Using hammer, tap the end of the well cap to tighten grip
14. Replace well cover	<ol style="list-style-type: none"> 1. Scrape knuckles/hand 2. Strain wrist/bruise palm 3. Pinch fingers or hand 	<ol style="list-style-type: none"> 1. Wear proper PPE (leather gloves) 2. Using hammer, tap the end of the wrench to tighten the grip of the bolts 3. Wear proper PPE (leather gloves)
15. Transport drums to disposal staging location	<ol style="list-style-type: none"> 1. Back, arm or shoulder strain from moving drums 2. Pinch hazard 3. Contact with potentially contaminated groundwater when moving improperly sealed drums 4. Slips/ Trips/ Falls when moving drum 5. Drop drum on feet/toes 	<ol style="list-style-type: none"> 1. Use drum cart for moving drums / Use proper lifting techniques / Obtain assistance, if needed 2. Wear proper PPE (leather gloves) 3. Wear proper PPE (nitrile gloves under leather gloves) / Properly seal drum to prevent leak 4. Ensure route to move drum to storage space is dry and free from obstructions 5. Wear proper PP (safety shoes)

JSA Title: Groundwater Sampling

JSA Number: JSA008-01

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
16. Place used PPE in designated disposal drum	<ol style="list-style-type: none"> 1. Pressure build-up inside drum 2. Pinch hazard 	<ol style="list-style-type: none"> 1. Remove cap from bung hole in drum to relieve pressure 2. Wear proper PPE (leather gloves)
17. Decontaminate equipment	<ol style="list-style-type: none"> 1. Splashing water/soap from decontamination 2. Contact with potentially contaminated groundwater through dermal exposure 3. Electrical shock from broken electric cords 	<ol style="list-style-type: none"> 1. Wear proper PPE (safety glasses) 2. Wear proper PPE (safety glasses, dermal protection) 3. Properly plug in pump to generator / Do not allow the pump or generator to contact water / Check for breaks in the cord
18. All activities	<ol style="list-style-type: none"> 1. Slips/ Trips/ Falls 2. Hand injuries, cuts or lacerations during manual handling of materials 3. Foot injuries 4. Back injuries 5. Traffic 6. Wildlife: Stray dogs, Mice/rats, Vectors (i.e. mosquitoes, bees, etc.) 7. High Noise levels 8. Overhead hazards 9. Heat Stress/ Cold Stress 10. Eye Injuries 	<ol style="list-style-type: none"> 1. Be aware of potential trip hazards / Follow good housekeeping procedures/ Mark significant hazards 2. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery or dirty objects before handling / Wear leather/ cut-resistant gloves 3. Wear Langan approved safety shoes 4. Use proper lifting techniques / Consider load location, task repetition, and load weigh when evaluating what is safe or unsafe to lift / Obtain assistance when possible 5. Wear high visibility clothing & vest / Use cones or signs to designate work area 6. Be aware of surroundings at all times, including the presence of wildlife/ Do not approach stray dogs / Carry/use dog/animal repellent / Use bug spray when needed 7. Wear hearing protection 8. Wear hard hat / Avoid areas where overhead hazards exist. 9. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather) / Drink plenty of fluids to avoid dehydration / Takes breaks as necessary to avoid heat/cold stress 10. Wear safety glasses
Additional items.		
Additional Items identified while in the field. (Delete row if not needed.)		

JSA Title: Groundwater Sampling
JSA Number: JSA008-01

<u>Print Name</u>	<u>Sign Name</u>	<u>Date</u>
<i>Prepared by:</i>		
<i>Reviewed by:</i>		

<h1>LANGAN</h1>	JSA NUMBER: 003568901-009	OFFICE: Doylestown
	DATE: 10/03/11	PROJECT MANAGER: Rich LoCastro
REVISION DATE:	SAFETY OFFICER: Shelly Beitler	ANALYSIS BY: Shelly Beitler
SITE: FPE - Newark JOB TITLE OR TASK: Monitoring Well Development	PERSON(S) PERFORMING JOB: Shelly Beitler Matt Shrensel	REVIEWED BY: Rich LoCastro Tony Moffa
REQUIRED PERSONAL PROTECTIVE EQUIPMENT (PPE) AND/OR PERTINENT JOB SAFETY FORMS:		
Minimum PPE:	Steel-toed boots, long-sleeved shirt, nitrile gloves, safety glasses, hard hat	
Additional PPE (as needed):	Cut-resistant or work gloves, Tyvek sleeves, high visibility vest, face shield	
Monitoring Equipment:	None	
Job Safety Form:	Tailgate Meeting	

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
1. Daily Tailgate Safety Meeting	1. None	1. All employees assigned to this task will attend a daily tailgate safety meeting, which will include the pertinent JSA's, Standard Operating Procedures (SOPs), types of potential hazards, and actual hazards present and controls for those hazards.
2. Move equipment to work site	1. Back strain when lifting heavy equipment 2. Slips/trips/falls while moving equipment 3. Traffic (if applicable)	1a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads > 50 lbs. 1b. Minimize distance to vehicle 2a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads > 50 lbs. 2b. Minimize distance to vehicle 2c. Have unobstructed path to vehicle or collection point 2d. Do not lift/walk with boxes that are heavy/difficult to lift 3. Wear high visibility vests and exercise caution.
3. Measure depth to water	1. Exposure to hazardous substances 2. Pinch fingers in water level instrument	1. Wear proper PPE (nitrile gloves) 2. Wear proper PPE (cut-resistant gloves)

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
4. Install tremie pipe in the monitoring well and connect to water source	1. Pinch fingers when connecting pipes 2. Hand injuries during installation of tremie pipe 3. Back strain from holding tremie pipe 4. High pressure water spray from poor connections	1. Wear proper PPE (nitrile gloves) 2. Wear proper PPE (nitrile gloves) 3. Use legs and arms and not the back when installing the pump; Use two people when lowering a pump greater than 80 feet 4a. Check all connections to make sure they are tight and secure 4b. Wear proper PPE (safety glasses)
5. Install pump in well a. Connect pump to sample tubing b. Lower pump to desired depth in well c. Connect sample tubing to flow cell d. Turn on power source (generator) e. Connect pump to power source (generator)	1. Hand injuries during installation of pump 2. Lacerations when cutting tubing 3. Back strain during installation of pump 4. Physical hazards associated with manual lifting of pump, generator and other heavy equipment 5. Back strain from starting generator 6. Burns from hot exhaust from generator 7. Electrical shock from improper use of generator and pump	1. Wear proper PPE (cut-resistant and nitrile gloves) when installing pump 2. OPEN BLADES ARE PROHIBITED FROM USE AT THE SITE; use safety tubing cutter 3. Use legs and arms and not the back when installing the pump; Use two people when lowering a pump greater than 80 feet 4. Lift heavy objects using proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Obtain assistance when handling loads greater than 50 lbs. 5. Use arm when starting generator; do not overstrain if generator does not start 6. Do not touch generator near exhaust; use proper handle to carry; allow generator to cool down before moving 7. Properly plug in pump to generator; do not allow the pump or generator to contact water; check for breaks in the cord
6. Develop monitoring well a. Jet water into well using tremie-pipe b. Connect pump to tubing b. Lower pump to desired depth in well c. Connect tubing to flow cell d. Turn on power source (generator) e. Connect pump to power source (generator) f. Turn on pump and adjust to desired flow rate g. Surge pump up and down well screen to remove sediment h. Containerize all purge water	1. Hand injuries during installation of pump 2. Lacerations when cutting tubing 3. Back strain during installation of pump 4. Physical hazards associated with manual lifting of pump, generator and other heavy equipment	1. Wear proper PPE (cut-resistant gloves and nitrile gloves) when installing pump 2. OPEN BLADES ARE PROHIBITED FROM USE AT THE SITE; use safety tubing cutter 3. Use legs and arms and not the back when installing the pump; Use two people when lowering a pump greater than 80 feet 4. Lift heavy objects using proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Obtain assistance when handling loads greater than 50 lbs.

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
6. Develop monitoring well (continued)	5. Back strain from starting generator 6. Burns from hot exhaust from generator 7. Electrical shock from improper use of generator and pump 8. Contaminated water spray from loose connections or tubing output	5. Use arm when starting generator; do not overstrain if generator does not start 6. Do not touch generator near exhaust; use proper handle to carry; allow generator to cool down before moving 7. Properly plug in pump to generator; do not allow the pump or generator to contact water; check for breaks in the cord 8a. Check all tubing connections to make sure they are tight and secure 8b. Wear proper PPE (safety glasses, face shields)
7. Pack up equipment	1. Back strain when lifting heavy equipment 2. Slips/trips/falls while moving equipment 3. Traffic (if applicable)	1a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads > 50 lbs. 1b. Minimize distance to vehicle 2a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads > 50 lbs. 2b. Minimize distance to vehicle 2c. Have unobstructed path to vehicle or collection point 2d. Do not lift/walk with boxes that are heavy/difficult to lift 3. Wear high visibility vests and exercise caution.
8. Transport drums to central staging location	1. Back, arm or shoulder strain from moving drums 2. Pinch fingers/hand in drum cart when moving drums 3. Pinch fingers/hand when operating lift-gate on vehicle 4. Contact with potentially contaminated groundwater when moving improperly sealed drums 5. Slips when moving drum 6. Drop drum on feet/toes	1. Use drum cart for moving drums; keep back in neutral position while raising barrel with drum cart; obtain assistance when moving the drum, if needed 2. Wear proper PPE (cut-resistant gloves); keep fingers away from pinch-points 3. Wear proper PPE (cut-resistant gloves); keep fingers away from pinch-points 4. Wear proper PPE (nitrile gloves under cut-resistant gloves); properly seal drum to prevent leaks 5. Make sure route to move drum and storage space is dry and free from obstructions 6. Wear proper PPE (steel-toe shoes); Work in a safe manner to prevent dropped drum

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
9. All activities	<p>1. Slips, Trips, and Falls</p> <p>2. Hand injuries during manual handling of materials</p> <p>3. Foot injuries</p> <p>4. Back injuries</p> <p>5. Vehicular traffic</p>	<p>1a. All personnel should be constantly watching for trip hazards, such as uneven terrain, holes, ditches, stretched wires or ropes or other materials in their path</p> <p>1b. Proper housekeeping of materials during sampling events</p> <p>1c. Mark significant below-grade hazards (i.e. holes, trenches) with safety cones or spray paint</p> <p>1d. Wear proper footwear for terrain and scope of work (steel-toe boots)</p> <p>1e. Rainy, snowy, or icy conditions will warrant a more cautious work attitude. Employees should change work speed and style to fit the weather conditions</p> <p>2a. Workers should inspect materials for jagged or sharp edges, and rough or slippery surfaces</p> <p>2b. Workers should keep fingers away from pinch and shear points, especially when setting down materials</p> <p>2c. Workers should wipe off greasy, wet, slippery or dirty objects before attempting to handle them</p> <p>2d. Cut-resistant gloves should be worn at all times except when the gloves create a hindrance to completing the task in a safe manner</p> <p>3. Steel-toed boots should be used for protection of the feet</p> <p>4a. All three main factors in manual lifting (load location, task repetition, and load weight) must be considered when evaluating what is safe or unsafe to lift; obtain assistance when possible</p> <p>4b. All manual lifting of heavy or bulky objects shall be carefully planned to avoid injuries or damage to equipment</p> <p>5. Employees shall wear high-visibility shirts or safety vests when performing work in high traffic areas; use cones where appropriate to designate work area; notify building occupants and fork lift operators of work areas</p>

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
9. All activities (continued)	6. Wildlife a. Stray dogs b. Mice/rats c. Vectors (i.e. mosquitoes, bees, etc.) 7. Heat Stress/Cold Stress 8. Crime	6a. Employees shall be aware of their surroundings at all times, including the presence of wildlife 6b. Employees shall not approach any stray dogs 6c. Employees shall carry/use Halt in the event a stray dog may attack 6d. Use bug spray when needed 6e. Employees shall wear long-sleeve shirts during all activities at the site 7. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather); drink plenty of fluids to avoid dehydration; take breaks as necessary to avoid heat/cold stress 8. Employees shall be aware that the site is in a high crime area and work shall be performed in pairs, particularly in isolated areas of the facility and surrounding area

<h1>LANGAN</h1>	JSA NUMBER:	OFFICE:
	DATE: 08/04/10	PROJECT MANAGER:
	REVISION DATE: 7/28/11	SAFETY OFFICER:
SITE:	PERSON(S) PERFORMING JOB:	ANALYSIS BY:
JOB TITLE OR TASK: Monitoring Well Installation		REVIEWED BY: Tony Moffa
REQUIRED PERSONAL PROTECTIVE EQUIPMENT (PPE) AND/OR PERTINENT JOB SAFETY FORMS:		
Minimum PPE:	Steel-toed boots, long-sleeved shirt, nitrile gloves, safety glasses, hard hat	
Additional PPE (as needed):	Cut-resistant or work gloves, Tyvek sleeves, high visibility vest	
Monitoring Equipment:	Photo-ionization detector (PID)	
Job Safety Form:	Tailgate Meeting	

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
1. Daily Tailgate Safety Meeting	1. None	1. All employees assigned to this task will attend a daily tailgate safety meeting, which will include the pertinent JSA's, Standard Operating Procedures (SOPs), types of potential hazards, and actual hazards present and controls for those hazards.
2. Move equipment to work site	1. Back strain when lifting heavy equipment 2. Slips/trips/falls while moving equipment 3. Traffic (if applicable) 4. Pinched fingers or running over toes during geoprobe set-up	1a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads greater than 50 lbs. 1b. Minimize distance to vehicle 2a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads greater than 50 lbs. 2b. Minimize distance to vehicle 2c. Have unobstructed path to vehicle or collection point 2d. Do not lift/walk with boxes that are heavy/difficult to lift 3. Wear high visibility vests and exercise caution. 4a. Wear proper PPE (cut-resistant gloves)

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
2. Move equipment to work site (continued)	5. Overturn drill rig while transporting to loading dock on flat-bed tow truck	4b. Stay alert, be aware of geoprobe rig at all times 5a. Drill rig should be parked in center of flat-bed tow truck 5b. Emergency brake shall be used at all times during transport on the flat-bed truck 5c. All unnecessary personnel should stay away from the flat-bed truck during moving activities
3. Set-up geoprobe rig at desired location	1. Slips/trips/falls while moving equipment 2. Pinched fingers or running over toes during geoprobe set-up 3. Clothing entanglement 4. Electrocution/falling equipment and debris from raising geoprobe rig mast 5. Carbon monoxide poisoning 6. Geoprobe rig roll-over 7. Geoprobe rig movement	1a. All personnel should be constantly watching for trip hazards, such as uneven terrain, holes, ditches, stretched wires or ropes or other materials in their path 1b. Proper housekeeping of materials during sampling events 1c. Mark significant below-grade hazards (i.e. holes, trenches) with safety cones or spray paint 2a. Wear proper PPE (cut-resistant gloves) 2b. Stay alert, be aware of geoprobe rig at all times 3. Wear proper attire for geoprobe rig (no loose clothing, strings, etc.) 4a. Wear proper PPE (hard hats) 4b. Be aware of locations at all times; look up, down and around before raising mast 4c. Check geoprobe drill rig mast prior to raising for loose objects/debris 5. Properly ventilate exhaust from geoprobe rig when working indoors or in areas of poor ventilation 6a. Do not move rig with mast raised 6b. Set stabilizers prior to raising mast, if applicable 6c. Inspect work area; if area appears unstable, area should be assessed by a qualified professional engineer or the MIP boring location should be moved 7a. All field personnel should stay clear of the geoprobe rig while moving 7b. Use a spotter when backing up the geoprobe rig

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
<p>4. Advance geoprobe rods below ground surface to desired depth</p>	<p>1. Strain wrist/bruise palm while preparing geoprobe rods</p> <p>2. Pinched fingers while preparing geoprobe/MIP rods</p> <p>3. Injury due to encountering below grade utilities</p> <p>4. Back strain while preparing geoprobe rods</p> <p>5. Clothing entanglement while advancing geoprobe rods</p> <p>6. Carbon monoxide poisoning</p> <p>7. Bruised/broken toes/feet from dropping equipment and geoprobe rods</p> <p>8. High noise levels</p> <p>9. Injury from faulty equipment</p>	<p>1a. Wear proper PPE (cut-resistant gloves)</p> <p>1b. Use proper technique for preparing geoprobe rods; use second person if necessary</p> <p>2. Wear proper PPE (cut-resistant gloves)</p> <p>3a. Markout all utilities prior to advancing the MIP boring using utility plans, geophysical contractor, or site personnel knowledge</p> <p>3b. Clear all subsurface soil borings to a minimum of 5 feet below grade</p> <p>4. Use proper lifting technique (use legs for bending and lifting and not the back); obtain assistance if needed</p> <p>5. Wear proper attire for geoprobe rig (no loose clothing, strings, etc.)</p> <p>6. Properly ventilate exhaust from geoprobe rig when working indoors or in areas of poor ventilation</p> <p>7. Wear proper PPE (steel-toe boots); Work in a safe manner to prevent dropped rod</p> <p>8. Wear proper PPE (hearing protection)</p> <p>9. Geoprobe contractor shall inspect all equipment prior to use</p>
<p>5. Remove and open acetate liner</p>	<p>1. Pinched fingers while removing macrocore</p> <p>2. Cuts/lacerations when cutting acetate liner open</p> <p>3. Exposure to hazardous vapors</p> <p>4. Skin contact with contaminated soil</p>	<p>1. Wear proper PPE (nitrile and cut-resistant gloves)</p> <p>2a. OPEN BLADES ARE PROHIBITED FROM USE AT THE SITE; use acetate liner cutting tool</p> <p>2b. Wear proper PPE (cut-resistant gloves)</p> <p>2c. Cut acetate liner away from body</p> <p>3a. Do not place face over acetate liner when opening</p> <p>3b. Monitor hazardous vapors in air with PID; upgrade PPE as necessary based on levels contained in the Health and Safety Plan</p> <p>4. Wear proper PPE (nitrile gloves)</p>

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
6. Remove soil from acetate liner and place in a 55-gallon drum	1. Cuts/lacerations from acetate liner 2. Pinched fingers/hand while opening/closing 55-gallon drum 3. Skin contact with contaminated soil 4. Soil debris in eyes	1. Wear proper PPE (cut-resistant gloves) 2a. Wear proper PPE (cut-resistant gloves) 2b. Keep fingers/hands away from pinch points 3. Wear proper PPE (nitrile gloves, long-sleeve shirt) 4. Wear proper PPE (safety glasses)
7. Repeat steps 4 and 5 until desired depth is reached	1. See Steps 4 and 5	1. See Steps 4 and 5
8. Remove geoprobe rods and place in storage rack	1. Clothing entanglement while removing geoprobe rods 2. Back strain while removing geoprobe rods 3. Pinched fingers while removing geoprobe rods 4. Carbon monoxide poisoning 5. High noise levels 6. Injury from faulty equipment	1. Wear proper attire for geoprobe rig (no loose clothing, strings, etc.) 2. Use proper lifting technique (use legs for bending and lifting and not the back); obtain assistance if needed 3. Wear proper PPE (cut-resistant gloves) 4. Properly ventilate exhaust from geoprobe rig when working indoors or in areas of poor ventilation 5. Wear proper PPE (hearing protection) 6. Geoprobe contractor shall inspect all equipment prior to use
9. Attach hollow-stem augers to the geoprobe rig; advance augers and attach additional augers until desired depth is reached	1. Strain wrist/bruise palm while attaching augers 2. Pinched fingers while attaching augers 3. Back strain while lifting and attaching augers and shoving drill cuttings in 55-gallon drums 4. Clothing entanglement while advancing augers 5. Carbon monoxide poisoning 6. Bruised/broken toes/feet from dropping equipment and augers 7. High noise levels 8. Injury from faulty equipment 9. Skin contact with contaminated soil	1a. Wear proper PPE (cut-resistant gloves) 1b. Use proper technique for attaching augers; use second person if necessary 2. Wear proper PPE (cut-resistant gloves); keep fingers away from pinch points 3. Use proper lifting technique (use legs for bending and lifting and not the back); obtain assistance if needed 4. Wear proper attire for geoprobe rig (no loose clothing, strings, etc.) 5. Properly ventilate exhaust when working indoors or in areas of poor ventilation 6. Wear proper PPE (steel-toe boots); Work in a safe manner to prevent dropped augers/equipment 7. Wear proper PPE (hearing protection) 8. Geoprobe contractor shall inspect all equipment prior to use 9. Wear proper PPE (nitrile gloves, long-sleeve shirt)

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
10. Install monitoring well	10. High noise levels 1. Pinched fingers while constructing PVC monitoring well 2. Lacerations/abrasions while cutting PVC monitoring well 3. Back/arm strain while setting PVC monitoring well inside augers 4. Lacerations/abrasions from cutting open bags of sand and bentonite 5. Back/arm strain while filling annulus space with sand and bentonite	10. Wear proper PPE (hearing protection) 1. Wear proper PPE (nitrile gloves and cut-resistant gloves) 2a. OPEN BLADES ARE PROHIBITED FROM USE AT THE SITE; use appropriate PVC cutting tools 2b. Cut away from the body 2c. Wear proper PPE (cut-resistant gloves) 3. Use proper lifting/bending technique (use legs for bending and lifting and not the back); obtain assistance if needed 4a. OPEN BLADES ARE PROHIBITED FROM USE AT THE SITE; use scissors 4b. Wear proper PPE (cut-resistant gloves) 5. Use proper lifting/bending technique (use legs for bending and lifting and not the back); obtain assistance if needed
11. Tremie-grout annulus space above bentonite seal	1. Splashed cement-bentonite grout on face/eyes 2. Injury from faulty equipment 3. Back strain while mixing cement/bentonite grout 4. Pinched fingers while using grout mixer	1. Wear proper PPE (safety glasses) 2. Geoprobe contractor shall inspect all equipment prior to use 3. Use proper lifting/bending technique (use legs for bending and lifting and not the back); obtain assistance if needed 4. Wear proper PPE (nitrile gloves and cut-resistant gloves)
12. Install flush-mount monitoring well pad	1. Splashed concrete on eyes/face during mixing 2. Pinched fingers when opening/closing monitoring well manhole 3. Cuts or lacerations from opening concrete bag	1. Wear proper PPE (safety glasses) 2. Wear proper PPE (cut-resistant gloves); keep fingers away from pinch points 3a. OPEN BLADES ARE PROHIBITED FROM USE AT THE SITE; use scissors 3b. Wear proper PPE (cut-resistant gloves)
13. Decontaminate geoprobe rods and augers	1. Splashed decontamination water/debris on face/eyes 2. Back strain while decontaminating geoprobe rods and augers 3. Injury from high-pressure washer 4. Injury from faulty decontamination equipment	1. Wear proper PPE (safety glasses) 2. Use proper lifting/bending technique (use legs for bending and lifting and not the back); obtain assistance if needed 3. Wear proper PPE (cut-resistant gloves, safety glasses); be aware of pressure 4. Contractor shall inspect all equipment prior to use

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
14. Develop monitoring well a. Connect pump to sample tubing b. Lower pump to desired depth in well c. Connect sample tubing to flow cell d. Turn on power source (generator) e. Connect pump to power source (generator) f. Turn on pump and adjust to desired flow rate g. Surge pump up and down well screen to remove sediment	1. Hand injuries during installation of pump 2. Lacerations when cutting tubing 3. Back strain during installation of pump 4. Physical hazards associated with manual lifting of pump, generator and other heavy equipment 5. Back strain from starting generator 6. Burns from hot exhaust from generator 7. Electrical shock from improper use of generator and pump 8. Contaminated water spray from loose connections	1. Wear proper PPE (cut-resistant gloves and nitrile gloves) when installing pump 2. OPEN BLADES ARE PROHIBITED FROM USE AT THE SITE; use safety tubing cutter 3. Use legs and arms and not the back when installing the pump; Use two people when lowering a pump greater than 80 feet 4. Lift heavy objects using proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Obtain assistance when handling loads greater than 50 lbs. 5. Use arm when starting generator; do not overstrain if generator does not start 6. Do not touch generator near exhaust; use proper handle to carry; allow generator to cool down before moving 7. Properly plug in pump to generator; do not allow the pump or generator to contact water; check for breaks in the cord 8. Check all tubing connections to make sure they are tight and secure

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
15. Pack up equipment	1. Back strain when lifting heavy equipment 2. Slips/trips/falls while moving equipment 3. Traffic (if applicable) 4. Pinched fingers or running over toes during geoprobe set-up	1a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads greater than 50 lbs. 1b. Minimize distance to vehicle 2a. Use proper lifting technique (use legs for bending and lifting and not the back). Use wheeled transport for heavy equipment. Get assistance when handling loads greater than 50 lbs. 2b. Minimize distance to vehicle 2c. Have unobstructed path to vehicle or collection point 2d. Do not lift/walk with boxes that are heavy/difficult to lift 3. Wear high visibility vests and exercise caution. 4a. Wear proper PPE (cut-resistant gloves) 4b. Stay alert, be aware of geoprobe rig at all times
16. Transport drums to central staging location	1. Back, arm or shoulder strain from moving drums 2. Pinch fingers/hand in drum cart when moving drums 3. Pinch fingers/hand when operating lift-gate on vehicle 4. Contact with potentially contaminated groundwater when moving improperly sealed drums 5. Slips when moving drum 6. Drop drum on feet/toes	1. Use drum cart for moving drums; keep back in neutral position while raising barrel with drum cart; obtain assistance when moving the drum, if needed 2. Wear proper PPE (cut-resistant gloves); keep fingers away from pinch-points 3. Wear proper PPE (cut-resistant gloves); keep fingers away from pinch-points 4. Wear proper PPE (nitrile gloves under cut-resistant gloves); properly seal drum to prevent leaks 5. Make sure route to move drum and storage space is dry and free from obstructions 6. Wear proper PPE (steel-toe shoes); Work in a safe manner to prevent dropped drum
17. All activities	1. Slips, Trips, and Falls	1a. All personnel should be constantly watching for trip hazards, such as uneven terrain, holes, ditches, stretched wires or ropes or other materials in their path 1b. Proper housekeeping of materials during sampling events

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
	<p>2. Hand injuries during manual handling of materials</p> <p>3. Foot injuries</p>	<p>1c. Mark significant below-grade hazards (i.e. holes, trenches) with safety cones or spray paint</p> <p>1d. Wear proper footwear for terrain and scope of work (steel-toe boots)</p> <p>1e. Rainy, snowy, or icy conditions will warrant a more cautious work attitude. Employees should change work speed and style to fit the weather conditions</p> <p>2a. Workers should inspect materials for jagged or sharp edges, and rough or slippery surfaces</p> <p>2b. Workers should keep fingers away from pinch and shear points, especially when setting down materials</p> <p>2c. Workers should wipe off greasy, wet, slippery or dirty objects before attempting to handle them</p> <p>2d. Cut-resistant gloves should be worn at all times except when the gloves create a hindrance to completing the task in a safe manner</p> <p>3. Steel-toed boots should be used for protection of the feet</p>

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
17. All activities (continued)	4. Back injuries 5. Vehicular traffic 6. Wildlife a. Stray dogs b. Mice/rats c. Vectors (i.e. mosquitoes, bees, etc.) 7. Heat Stress/Cold Stress 8. Crime	4a. All three main factors in manual lifting (load location, task repetition, and load weight) must be considered when evaluating what is safe or unsafe to lift; obtain assistance when possible 4b. All manual lifting of heavy or bulky objects shall be carefully planned to avoid injuries or damage to equipment 5. Employees shall wear high-visibility shirts or safety vests when performing work in high traffic areas; use cones where appropriate to designate work area; notify building occupants and fork lift operators of work areas 6a. Employees shall be aware of their surroundings at all times, including the presence of wildlife 6b. Employees shall not approach any stray dogs 6c. Employees shall carry/use Halt in the event a stray dog may attack 6d. Use bug spray when needed 6e. Employees shall wear long-sleeve shirts during all activities at the site 7. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather); drink plenty of fluids to avoid dehydration; take breaks as necessary to avoid heat/cold stress 8. Employees shall be aware that the site is in a high crime area and work shall be performed in pairs, particularly in isolated areas of the facility and surrounding area
Additional items identified in the field.		
Additional Items.		

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
If additional items are identified during daily work activities, please notify all relevant personnel about the change and document on this JSA.		

Date of JSA review: _____

Print Name	Sign Name	Company
		Langan
		Langan
		Langan

<h1>LANGAN</h1>	JSA NUMBER:	OFFICE: NYC
	DATE: 04/03/2014	PROJECT MANAGER:
REVISION DATE:		SAFETY OFFICER:
SITE: JOB TITLE OR TASK: Soil Screening For Off-Site Disposal	PERSON(S) PERFORMING JOB:	ANALYSIS BY: William Bohrer
		REVIEWED BY: Tony Moffa
REQUIRED PERSONAL PROTECTIVE EQUIPMENT (PPE) AND/OR PERTINENT JOB SAFETY FORMS:		
Minimum PPE: Safety Glasses, Hard Hat, Steel toe boots, Sleeved shirt and pants, Traffic/Safety Vest, Nitrile Gloves		
Additional PPE (as needed): Leather, Hearing protection, Traffic Cones		
Monitoring Equipment (as needed): Photoionization Detector (PID)		
Job Safety Form:		

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
1. Daily Tailgate Safety Meeting	None	All employees assigned to this task will attend a daily tailgate safety meeting, which will include the pertinent JSA's,
2. Unpack Equipment	<ol style="list-style-type: none"> Slip, trips, and falls Physical hazards including strains and hand injury 	<ol style="list-style-type: none"> Be aware of hazards in area, place orange safety cones in areas of potential STF's could occur. Where possible, remove tripping hazards. Use proper lifting and bending techniques and do not lift heavy loads without assistance, use assistance as necessary. Avoid putting hands near pinch points. Wear leather work gloves when handling equipment of other heavy materials. Use proper cutting tool to open cardboard boxes.
3. Initial Site Arrival- Assess Site Conditions	<ol style="list-style-type: none"> Traffic 	<ol style="list-style-type: none"> Be alert. Secure area from through traffic

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
4. Calibrate PID <ul style="list-style-type: none"> a. Fill Tedlar Bag with Span Gas b. Follow manufacturer's instructions c. Complete fresh air calibration first 	<ul style="list-style-type: none"> 1. Pinch points when connecting regulator to valve seat 2. overinflating Tedlar bag 	<ul style="list-style-type: none"> 1. Check threads on regulator and span gas bottle for condition, if threads are damaged do not use 2. Carefully thread regulator onto span gas bottle 3. Monitor Tedlar bag during filling, turn off gas when bag is nearly filled. 4. Do not leave Tedlar bag unattended 5. When calibration is complete, vent bag and store empty in equipment box
5. Survey excavated soil samples from excavation bucket	<ul style="list-style-type: none"> 1. Slip/trip hazards 2. Contact with front loader 3. Contact with impacted soil 4. Vapor Phase 	<ul style="list-style-type: none"> 1. Visually inspect path to excavator for slip/trip hazards; mark a pathway free of slip/trip hazards 2. Before entering front loader work area, make visual contact with operator to insure operator is aware of your presence 3. Use nitrile gloves 4. Have available ½ mask if there is a potential for high vapor phase 5. When ready to survey filled bucket, insist that operator has rested bucket on ground and is aware of your actions 6. Using a gloved finger, poke holes in the soil and place PID intake wand just in the hole, loosely cover hole with hand not holding PID 7. Record PID reading, repeat process several times with same bucket to insure reading is representative. 8. NEVER CLIMB THE SIDE OF A DUMP TRUCK TO SURVEY SOIL LOAD!
6. Leaving the site	<ul style="list-style-type: none"> 1. Contaminated vehicle/ PPE 	<ul style="list-style-type: none"> 1. Wash hands promptly. Contaminated PPE should be disposed of on-site. Remove boots and soiled clothing for secure storage in trunk.
Additional items identified in the field.		

SEQUENCE OF BASIC JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
Additional Items.		
<p>If additional items are identified during daily work activities, please notify all relevant personnel about the change and document on this JSA.</p>		

Date of JSA review: _____

Print Name	Sign Name	Company
		Langan
		Langan
		Langan

ATTACHMENT H

TAILGATE SAFETY BRIEFING FORM

APPENDIX C
COMMUNITY AIR MONITORING PLAN

Appendix 1A
New York State Department of Health
Generic Community Air Monitoring Plan

Overview

A Community Air Monitoring Plan (CAMP) requires real-time monitoring for volatile organic compounds (VOCs) and particulates (i.e., dust) at the downwind perimeter of each designated work area when certain activities are in progress at contaminated sites. The CAMP is not intended for use in establishing action levels for worker respiratory protection. Rather, its intent is to provide a measure of protection for the downwind community (i.e., off-site receptors including residences and businesses and on-site workers not directly involved with the subject work activities) from potential airborne contaminant releases as a direct result of investigative and remedial work activities. The action levels specified herein require increased monitoring, corrective actions to abate emissions, and/or work shutdown. Additionally, the CAMP helps to confirm that work activities did not spread contamination off-site through the air.

The generic CAMP presented below will be sufficient to cover many, if not most, sites. Specific requirements should be reviewed for each situation in consultation with NYSDOH to ensure proper applicability. In some cases, a separate site-specific CAMP or supplement may be required. Depending upon the nature of contamination, chemical-specific monitoring with appropriately-sensitive methods may be required. Depending upon the proximity of potentially exposed individuals, more stringent monitoring or response levels than those presented below may be required. Special requirements will be necessary for work within 20 feet of potentially exposed individuals or structures and for indoor work with co-located residences or facilities. These requirements should be determined in consultation with NYSDOH.

Reliance on the CAMP should not preclude simple, common-sense measures to keep VOCs, dust, and odors at a minimum around the work areas.

Community Air Monitoring Plan

Depending upon the nature of known or potential contaminants at each site, real-time air monitoring for VOCs and/or particulate levels at the perimeter of the exclusion zone or work area will be necessary. Most sites will involve VOC and particulate monitoring; sites known to be contaminated with heavy metals alone may only require particulate monitoring. If radiological contamination is a concern, additional monitoring requirements may be necessary per consultation with appropriate DEC/NYSDOH staff.

Continuous monitoring will be required for all ground intrusive activities and during the demolition of contaminated or potentially contaminated structures. Ground intrusive activities include, but are not limited to, soil/waste excavation and handling, test pitting or trenching, and the installation of soil borings or monitoring wells.

Periodic monitoring for VOCs will be required during non-intrusive activities such as the collection of soil and sediment samples or the collection of groundwater samples from existing monitoring wells. "Periodic" monitoring during sample collection might reasonably consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or

overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. In some instances, depending upon the proximity of potentially exposed individuals, continuous monitoring may be required during sampling activities. Examples of such situations include groundwater sampling at wells on the curb of a busy urban street, in the midst of a public park, or adjacent to a school or residence.

VOC Monitoring, Response Levels, and Actions

Volatile organic compounds (VOCs) must be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis or as otherwise specified. Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions, particularly if wind direction changes. The monitoring work should be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment should be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment should be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

1. If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
2. If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
3. If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.
4. All 15-minute readings must be recorded and be available for State (DEC and NYSDOH) personnel to review. Instantaneous readings, if any, used for decision purposes should also be recorded.

Particulate Monitoring, Response Levels, and Actions

Particulate concentrations should be monitored continuously at the upwind and downwind perimeters of the exclusion zone at temporary particulate monitoring stations. The particulate monitoring should be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment must be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during all work activities.

1. If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m^3) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques must be employed. Work may continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed $150 \text{ mcg}/\text{m}^3$ above the upwind level and provided that no visible dust is migrating from the work area.

2. If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than $150 \text{ mcg}/\text{m}^3$ above the upwind level, work must be stopped and a re-evaluation of activities initiated. Work can resume provided that dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within $150 \text{ mcg}/\text{m}^3$ of the upwind level and in preventing visible dust migration.

3. All readings must be recorded and be available for State (DEC and NYSDOH) and County Health personnel to review.

December 2009

APPENDIX D
QUALITY ASSURANCE PROJECT PLAN

Quality Assurance Project Plan

for

Greenpoint Marina
43-57 West Street & 2-24 Oak Street
Brooklyn, New York
NYSDEC BCP NO.: C224190

Prepared For:

57 West LLC & 24 Oak LLC
c/o Pearl Realty Management, LLC
155 Water Street, 3rd Floor
Brooklyn, New York 11201

Prepared By:

Langan Engineering, Environmental, Surveying
and Landscape Architecture, D.P.C.
21 Penn Plaza,
360 West 31st Street, 8th Floor
New York, New York 10001

July 2016
170267701

LANGAN

TABLE OF CONTENTS

	<u>PAGE</u>
1.0 PROJECT DESCRIPTION	1
1.1 Introduction	1
1.2 Project Objectives.....	1
1.3 Scope of Work	2
2.0 DATA QUALITY OBJECTIVES AND PROCESS.....	4
3.0 PROJECT ORGANIZATION.....	6
4.0 QUALITY ASSURANCE OBJECTIVES FOR COLLECTION OF DATA.....	7
4.1 Precision	7
4.2 Accuracy	7
4.3 Completeness.....	8
4.4 Representativeness	8
4.5 Comparability	9
4.6 Sensitivity	9
5.0 SAMPLE COLLECTION AND FIELD DATA ACQUISITION PROCEDURES... 	11
5.1 Field Documentation Procedures	11
5.1.1 Field Data and Notes.....	11
5.1.2 Sample Labeling.....	12
5.2 Equipment Calibration and Preventative Maintenance	13
5.3 Sample Collection	14
5.4 Sample Containers and Handling	15
5.5 Sample Preservation	16
5.6 Sample Shipment	16
5.6.1 Packaging.....	16
5.6.2 Shipping.....	17
5.7 Decontamination Procedures	17
5.8 Residuals Management	17
5.9 Chain-of-Custody Procedures.....	18
5.10 Laboratory Sample Storage Procedures	23
6.0 DATA REDUCTION, VALIDATION, AND REPORTING	24
6.1 Introduction	24
6.2 Data Reduction	24
6.3 Data Validation	25
7.0 QUALITY ASSURANCE PERFORMANCE AUDITS AND SYSTEM AUDITS 	27
7.1 Introduction	27
7.2 System Audits	27
7.3 Performance Audits	27

7.4	Formal Audits.....	27
8.0	CORRECTIVE ACTION	29
8.1	Introduction	29
8.2	Procedure Description	29
9.0	REFERENCES	32

FIGURES

Figure 5.1	Sample Custody	20
Figure 5.2	Chain-of-Custody Record - Air Samples	21
Figure 5.3	Chain-of-Custody Record - Soil and Groundwater Samples	22
Figure 8.1	Corrective Action Request	31

ATTACHMENTS

Attachment A:	Résumés
Attachment B:	Laboratory Reporting Limits and Method Detection Limits
Attachment C:	Analytical Methods/Quality Assurance Summary Table
Attachment D:	Sample Nomenclature

1.0 PROJECT DESCRIPTION

1.1 INTRODUCTION

This Quality Assurance Project Plan (QAPP) is for the 4.095-acre (178,378-square-foot) property located at 43-57 West Street and 2-24 Oak Street in the Greenpoint neighborhood of Brooklyn, New York (the "site"). The Site was entered into the New York State Department of Environmental Conservation (NYSDEC) Brownfield Cleanup Program (BCP) by 57 West LLC and 24 Oak LLC (the "Participants"), as Participants on September 12, 2014. BCP Site No. C224190 was assigned to the site by NYSDEC. Additional site information including site maps and data collected previously by Langan and others is provided in the Interim Remedial Measures (IRM) Work Plan.

This QAPP specifies analytical methods to be used to ensure that data collected during Site management are precise, accurate, representative, comparable, complete, and meet the sensitivity requirements of the project.

1.2 PROJECT OBJECTIVES

The objective of the IRM is to initiate the immediate removal of contaminant sources and source material and thereby mitigate plume migration. The proposed IRM will prevent additional environmental impacts to site media (soil, groundwater, and soil vapor) through removal of the USTs, LNAPL, and petroleum-impacted material (to the extent practicable). The proposed IRM will also simultaneously prepare the southern lot for use by a new, temporary, industrial tenant and aid in the development of a final remedy.

The proposed IRM consists of the following tasks:

- Decommissioning and removal of seven registered (PBS No. 2-612246) USTs, and any unknown USTs encountered;
- Excavation, to the extent practicable, to remove petroleum-impacted material;
- Removal of residual LNAPL from the open excavation;
- Demolition of an unoccupied building located north of the UST area to allow for additional removal of LNAPL and excavation of petroleum-impacted soil;
- Collection of documentation soil samples from the base and sidewalls of all excavations;

- Backfilling of excavations, as necessary;
- Installation of up to three monitoring wells after excavation is complete for continued monitoring and potential recovery of residual LNAPL; and
- Closure of NYSDEC Spill No. 13-08069.

The IRM described herein will be performed in accordance with applicable federal, state, and city regulations. An estimated remediation schedule is provided in Appendix A. A Construction Health and Safety Plan (CHASP) is provided as Appendix B. These objectives have been established in order to protect public health and the environment for the anticipated commercial use development at the Site.

1.3 SCOPE OF WORK

Implementation of the IRM will include waste characterization sampling; handling of contaminated soil and groundwater; documentation sampling; backfilling, and monitoring well installation. Disturbed soil will be sampled for laboratory analysis per disposal facility requirements, and visually examined, screened, and characterized to determine whether it is suitable for re-use or will be properly disposed at an approved disposal facility. A dust, odor, and organic vapor control and monitoring plan will be implemented during ground intrusive activities.

The following activities will be performed as part of the remedial action:

- Waste Characterization Soil Sampling – Soil samples for waste classification and disposal purposes will be collected during the remedial excavation. Soil samples will be collected at a frequency depending on the disposal facility requirements. Laboratory tests for characterization of a waste stream typically include all or a subset of the following list and will be determined by the facility's permit requirements: Total Petroleum Hydrocarbons (TPH); Target Compound List (TCL) volatile organic compounds (VOCs) and semivolatile organic compounds (SVOCs), including tentatively identified compounds (TICs); polychlorinated biphenyls (PCBs); Target Analyte List (TAL) metals; pesticides and herbicides; the Resource Conservation and Recovery Act (RCRA) hazardous characteristics of ignitability, corrosivity, and reactivity; RCRA toxicity characteristic using the Toxic Characteristics Leaching Procedure (TCLP) for VOCs, SVOCs, metals, pesticides, and herbicides; Diesel Range Organics (DRO); and/or Gasoline Range Organics (GRO).
- Documentation Soil Sampling – Soil samples will be collected after reaching final excavation depths and prior to backfilling to document any contamination

that will remain on site. Documentation samples would be collected at a frequency in accordance with DER-10 and analyzed for Part 375 and TCL/TAL VOCs, SVOCs, metals, pesticides, and PCBs.

- Backfill - The clean fill would be segregated at a source/facility that is free of environmental contaminants. Qualified environmental personnel would collect representative samples at a frequency consistent with NYSDEC DER-10 Table 5.4(e)10 or CP-51 / Soil Cleanup Guidance (Table 4). The samples would be analyzed for Part 375 VOCs (EPA Method 8260), SVOCs (EPA Method 8270), pesticides/PCBs (EPA Method 8082/8081) and metals/inorganics by an NYSDOH ELAP-certified laboratory that is certified in the appropriate fields of accreditation. Acceptable backfill material would not exceed Unrestricted Use SCOs. Upon meeting these criteria, the certified-clean fill would be transported to the site and segregated from impacted material, as necessary, on plastic sheeting until it is used as backfill.

2.0 DATA QUALITY OBJECTIVES AND PROCESS

Data Quality Objectives (DQOs) are qualitative and quantitative statements to help ensure that data of known and appropriate quality are obtained during the project. DQOs for sampling activities are determined by evaluating five factors:

- Data needs and uses: The types of data required and how the data will be used after it is obtained.
- Parameters of Interest: The types of chemical or physical parameters required for the intended use.
- Level of Concern: Levels of constituents, which may require remedial actions or further investigations.
- Required Analytical Level: The level of data quality, data precision, and QA/QC documentation required for chemical analysis.
- Required Detection Limits: The detection limits necessary based on the above information.

The quality assurance and quality control objectives for all measurement data include:

- **Precision** – an expression of the reproducibility of measurements of the same parameter under a given set of conditions. Field sampling precision will be determined by analyzing coded duplicate samples and analytical precision will be determined by analyzing internal QC duplicates and/or matrix spike duplicates.
- **Accuracy** – a measure of the degree of agreement of a measured value with the true or expected value of the quantity of concern. For soil and groundwater samples, accuracy will be determined through the assessment of the analytical results of field blanks and trip blanks for each sample set. Analytical accuracy will be assessed by examining the percent recoveries of surrogate compounds that are added to each sample (organic analyses only), internal standards, laboratory method blanks, instrument calibration, and the percent recoveries of matrix spike compounds added to selected samples and laboratory blanks. For soil vapor or air samples, analytical accuracy will be assessed by examining the percent recoveries that are added to each sample, internal standards, laboratory method blanks, and instrument calibration.
- **Representativeness** – expresses the degree to which sample data accurately and precisely represent a characteristic of a population, parameter variations at a

sampling point, or an environmental condition. Representativeness is dependent upon the adequate design of the sampling program and will be satisfied by ensuring that the scope of work is followed and that specified sampling and analysis techniques are used. Representativeness in the laboratory is ensured by compliance to nationally-recognized analytical methods, meeting sample holding times, and maintaining sample integrity while the samples are in the laboratory's possession. This is accomplished by following all applicable methods, laboratory-issued standard operating procedures (SOPs), the laboratory's Quality Assurance Manual, and this QAPP. The laboratory is required to be properly certified and accredited.

- **Completeness** – the percentage of measurements made which are judged to be valid. Completeness will be assessed through data validation. The QC objective for completeness is generation of valid data for at least 90 percent of the analyses requested.
- **Comparability** – expresses the degree of confidence with which one data set can be compared to another. The comparability of all data collected for this project will be ensured using several procedures, including standard methods for sampling and analysis as documented in the QAPP, using standard reporting units and reporting formats, and data validation.
- **Sensitivity** – the ability of the instrument or method to detect target analytes at the levels of interest. The project manager will select, with input from the laboratory and QA personnel, sampling and analytical procedures that achieve the required levels of detection.

3.0 PROJECT ORGANIZATION

Any future remedial activities and investigations will be overseen by Langan or another environmental consultant for the Participants or a future owner. The environmental consultant will also arrange data analysis and reporting tasks. The analytical services will be performed by an ELAP-certified laboratory. Data validation services will be performed by approved data validation contractor(s).

For the required sampling as stated in the IRM Work Plan, sampling will be conducted by Langan, the analytical services will be performed by York Analytical Laboratories, Inc. of Stratford, Conn. (NYSDOH ELAP certification number 10854). Data validation services will be performed by Emily Strake; résumé attached (Attachment A).

Key contacts for this project are as follows:

57 West LLC and 24 Oak LLC:

Mr. Mark Moskowitz
Telephone: (718) 522-1267

Langan Project Manager:

Mr. Jason Hayes, PE, LEED AP
Telephone: (212) 479-5427

Langan Quality Assurance Officer (QAO):

Ms. Jennifer Armstrong
Telephone: (212) 479-5537

Program Quality Assurance Monitor:

Mr. Paul McMahon, PE
Telephone: (212) 479-5451

Data Validator:

Ms. Emily Strake
Telephone: (215) 491-6526

Laboratory Representative:

York Analytical Laboratories, Inc.
Rich August
Telephone: (800) 306-9675

4.0 QUALITY ASSURANCE OBJECTIVES FOR COLLECTION OF DATA

The overall quality assurance objective is to develop and implement procedures for sampling, laboratory analysis, field measurements, and reporting that will provide data of sufficient quality to evaluate the engineering controls on the Site. The sample set, chemical analysis results, and interpretations must be based on data that meet or exceed quality assurance objectives established for the Site. Quality assurance objectives are usually expressed in terms of accuracy or bias, sensitivity, completeness, representativeness, comparability, and sensitivity of analysis. Variances from the quality assurance objectives at any stage of the investigation will result in the implementation of appropriate corrective measures and an assessment of the impact of corrective measures on the usability of the data.

4.1 PRECISION

Precision is a measure of the degree to which two or more measurements are in agreement. Field precision is assessed through the collection and measurement of field duplicates. Laboratory precision and sample heterogeneity also contribute to the uncertainty of field duplicate measurements. This uncertainty is taken into account during the data assessment process. For field duplicates, results less than 2x the reporting limit (RL) meet the precision criteria if the absolute difference is less than $\pm 2x$ the RL and acceptable based on professional judgement. For results greater than 2x the RL, the acceptance criteria is a relative percent difference (RPD) of $\leq 50\%$ (soil and air), $< 30\%$ (water). RLs and method detection limits (MDL) are provided in Attachment B.

4.2 ACCURACY

Accuracy is the measurement of the reproducibility of the sampling and analytical methodology. It should be noted that precise data may not be accurate data. For the purpose of this QAPP, bias is defined as the constant or systematic distortion of a measurement process, which manifests itself as a persistent positive or negative deviation from the known or true value. This may be due to (but not limited to) improper sample collection, sample matrix, poorly calibrated analytical or sampling equipment, or limitations or errors in analytical methods and techniques.

Accuracy in the field is assessed through the use of field blanks and through compliance to all sample handling, preservation, and holding time requirements. All field blanks should be non-detect when analyzed by the laboratory. Any contaminant detected in an associated field blank will be evaluated against laboratory blanks (preparation or method)

and evaluated against field samples collected on the same day to determine potential for bias. Trip blanks are not required for non-aqueous matrices but are planned for non-aqueous matrices where high concentrations of VOCs are anticipated.

Laboratory accuracy is assessed by evaluating the percent recoveries of matrix spike/matrix spike duplicate (MS/MSD) samples, laboratory control samples (LCS), surrogate compound recoveries, and the results of method preparation blanks. MS/MSD, LCS, and surrogate percent recoveries will be compared to either method-specific control limits or laboratory-derived control limits. Sample volume permitting, samples displaying outliers should be reanalyzed. All associated method blanks should be non-detect when analyzed by the laboratory.

4.3 COMPLETENESS

Laboratory completeness is the ratio of total number of samples analyzed and verified as acceptable compared to the number of samples submitted to the fixed-base laboratory for analysis, expressed as a percent. Three measures of completeness are defined:

- Sampling completeness, defined as the number of valid samples collected relative to the number of samples planned for collection;
- Analytical completeness, defined as the number of valid sample measurements relative to the number of valid samples collected; and
- Overall completeness, defined as the number of valid sample measurements relative to the number of samples planned for collection.

Air, soil vapor, soil, and groundwater data will meet a 90% completeness criterion. If the criterion is not met, sample results will be evaluated for trends in rejected and unusable data. The effect of unusable data required for a determination of compliance will also be evaluated.

4.4 REPRESENTATIVENESS

Representativeness expresses the degree to which data accurately and precisely represents a characteristic of a population, parameter variations at a sampling point, a process condition, or an environmental condition within a defined spatial and/or temporal boundary. Representativeness is dependent upon the adequate design of the sampling program and will be satisfied by ensuring that the scope of work is followed

and that specified sampling and analysis techniques are used. This is performed by following applicable standard operating procedures (SOPs) and this QAPP. All field technicians will be given copies of appropriate documents prior to sampling events and are required to read, understand, and follow each document as it pertains to the tasks at hand.

Representativeness in the laboratory is ensured by compliance to nationally-recognized analytical methods, meeting sample holding times, and maintaining sample integrity while the samples are in the laboratory's possession. This is performed by following all applicable EPA methods, laboratory-issued SOPs, the laboratory's Quality Assurance Manual, and this QAPP. The laboratory is required to be properly certified and accredited.

4.5 COMPARABILITY

Comparability is an expression of the confidence with which one data set can be compared to another. Comparability is dependent upon the proper design of the sampling program and will be satisfied by ensuring that the sampling plan is followed and that sampling is performed according to the SOPs or other project-specific procedures. Analytical data will be comparable when similar sampling and analytical methods are used as documented in the QAPP. Comparability will be controlled by requiring the use of specific nationally-recognized analytical methods and requiring consistent method performance criteria. Comparability is also dependent on similar quality assurance objectives. Previously collected data will be evaluated to determine whether they may be combined with contemporary data sets.

4.6 SENSITIVITY

Sensitivity is the ability of the instrument or method to detect target analytes at the levels of interest. The project director will select, with input from the laboratory and QA personnel, sampling and analytical procedures that achieve the required levels of detection and QC acceptance limits that meet established performance criteria. Concurrently, the project director will select the level of data assessment to ensure that only data meeting the project DQOs are used in decision-making.

Field equipment will be used that can achieve the required levels of detection for analytical measurements in the field. In addition, the field sampling staff will collect and submit full volumes of samples as required by the laboratory for analysis, whenever possible. Full volume aliquots will help ensure achievement of the required limits of

detection and allow for reanalysis if necessary. The concentration of the lowest level check standard in a multi-point calibration curve will represent the reporting limit.

Analytical methods and quality assurance parameters associated with the sampling program are presented in Attachment C. The frequency of associated field blanks and duplicate samples will be based on the recommendations listed in DER-10, and as described in Section 5.3.

Site-specific MS and MSD samples will be prepared and analyzed by the analytical laboratory by spiking an aliquot of submitted sample volume with analytes of interest. Additional sample volume is not required by the laboratory for this purpose. An MS/MSD analysis will be analyzed at a rate of 1 out of every 20 samples, or one per analytical batch. MS/MSD samples are only required for soil and groundwater samples.

5.0 SAMPLE COLLECTION AND FIELD DATA ACQUISITION PROCEDURES

Soil and groundwater sampling will be conducted in accordance with the established NYSDEC protocols contained in DER-10/Technical Guidance for Site Investigation and Remediation (May2010) and title 6 of the New York Codes Rules and Regulations Part 375. Air sampling, if necessary, will be conducted in accordance with the established New York State Department of Health (NYSDOH) protocols contained in the Guidance for Evaluating Soil Vapor Intrusion in the State of New York (October 2006). The following sections describe procedures to be followed for specific tasks.

5.1 FIELD DOCUMENTATION PROCEDURES

Field documentation procedures will include summarizing field data in field books and notes and proper sample labeling. These procedures are described in the following sections.

5.1.1 Field Data and Notes

Field notebooks contain the documentary evidence regarding procedures conducted by field personnel. Hard cover, bound field notebooks will be used because of their compact size, durability, and secure page binding. The pages of the notebook will not be removed.

Entries will be made in waterproof, permanent blue or black ink. No erasures will be allowed. If an incorrect entry is made, the information will be crossed out with a single strike mark and the change initialed and dated by the team member making the change. Each entry will be dated. Entries will be legible and contain accurate and complete documentation of the individual or sampling team's activities or observations made. The level of detail will be sufficient to explain and reconstruct the activity conducted. Each entry will be signed by the person(s) making the entry.

The following types of information will be provided for each sampling task, as appropriate:

- Project name and number
- Reasons for being on-site or taking the sample
- Date and time of activity

- Sample identification numbers
- Geographical location of sampling points with references to the site, other facilities or a map coordinate system. Sketches will be made in the field logbook when appropriate
- Physical location of sampling locations such as depth below ground surface
- Description of the method of sampling including procedures followed, equipment used and any departure from the specified procedures
- Description of the sample including physical characteristics, odor, etc.
- Readings obtained from health and safety equipment
- Weather conditions at the time of sampling and previous meteorological events that may affect the representative nature of a sample
- Photographic information including a brief description of what was photographed, the date and time, the compass direction of the picture and the number of the picture on the camera
- Other pertinent observations such as the presence of other persons on the site, actions by others that may affect performance of site tasks, etc.
- Names of sampling personnel and signature of persons making entries

Field records will also be collected on field data sheets including boring logs, which will be used for geologic and drilling data during soil boring activities. Field data sheets will include the project-specific number and stored in the field project files when not in use. At the completion of the field activities, the field data sheets will be maintained in the central project file.

5.1.2 Sample Labeling

Each sample collected will be assigned a unique identification number in accordance with the sample nomenclature guidance included in Attachment D, and placed in an appropriate sample container. Each sample container will have a sample label affixed to the outside with the date and time of sample collection and project name. In addition,

the label will contain the sample identification number, analysis required and chemical preservatives added, if any. All documentation will be completed in waterproof ink.

5.2 EQUIPMENT CALIBRATION AND PREVENTATIVE MAINTENANCE

A photoionization detector (PID) will be used during the sampling activities to evaluate work zone action levels, collect pre- and post-sample readings for air samples, screen soil samples, and collect monitoring well headspace readings. Field calibration and/or field checking of the PID will be the responsibility of the field team leader and the site HSO, and will be accomplished by following the procedures outlined in the operating manual for the instrument. At a minimum, field calibration and/or field equipment checking will be performed once daily, prior to use. Field calibration will be documented in the field notebook. Entries made into the logbook regarding the status of field equipment will include the following information:

- Date and time of calibration
- Type of equipment serviced and identification number (such as serial number)
- Reference standard used for calibration
- Calibration and/or maintenance procedure used
- Other pertinent information

A water quality meter (YSI 6820 or similar) will be used during purging of groundwater to measure pH, specific conductance, temperature, dissolved oxygen, turbidity and oxidation-reduction-potential (ORP), every ten minutes. A portable turbidity meter (LaMotte or similar) may also be used to measure turbidity. Water-quality meters should be calibrated and the results documented before use each day using standardized field calibration procedures and calibration checks.

Equipment that fails calibration or becomes inoperable during use will be removed from service and segregated to prevent inadvertent utilization. The equipment will be properly tagged to indicate that it is out of calibration. Such equipment will be repaired and recalibrated to the manufacturer's specifications by qualified personnel. Equipment that cannot be repaired will be replaced.

Off-site calibration and maintenance of field instruments will be conducted as appropriate throughout the duration of project activities. All field instrumentation,

sampling equipment and accessories will be maintained in accordance with the manufacturer's recommendations and specifications and established field equipment practice. Off-site calibration and maintenance will be performed by qualified personnel. A logbook will be kept to document that established calibration and maintenance procedures have been followed. Documentation will include both scheduled and unscheduled maintenance.

5.3 SAMPLE COLLECTION

Soil Samples

Soil samples will be visually classified and field screened using a PID to assess potential impacts from VOCs and for health and safety monitoring. Soil samples collected for analysis of VOCs will be collected using either EnCore® or Terra Core® sampling equipment. For analysis of non-volatile parameters, samples will be homogenized and placed into glass jars. After collection, all sample jars will be capped and securely tightened, and placed in iced coolers and maintained at 4°C ±2°C until they are transferred to the laboratory for analysis, in accordance with the procedures outlined in Section 5.4. Analysis and/or extraction and digestion of collected soil samples will meet the holding times required for each analyte as specified in Attachment C. In addition, analysis of collected soil sample will meet all quality assurance criteria set forth by this QAPP and DER-10.

Groundwater Samples

Groundwater sampling will be conducted using low-flow sampling procedures following USEPA guidance ("Low Stress [low flow] Purging and Sampling Procedure for the Collection of Groundwater Samples from Monitoring Wells", EQASOP-GW 001, January 19, 2010).

During purging, field parameters should be measured, including: water level drawdown, purge rate, pH, specific conductance, temperature, dissolved oxygen, turbidity and oxidation-reduction-potential (ORP), every ten minutes using a water quality meter (YSI 6820 or similar) and a depth-to-water interface probe that should be decontaminated between wells. Samples should generally not be collected until the field parameters have stabilized. Field parameters will be considered stable once three sets of measurements are within ±0.1 standard units for pH, ±3% for conductivity and temperature, ±10 millivolts for ORP, and ±10% for turbidity and dissolved oxygen. Purge rates should be adjusted to keep the drawdown in the well to less than 0.3 feet,

as practical. Additionally, an attempt should be made to achieve a stable turbidity reading of less than 10 Nephelometric Turbidity Units (NTU) prior to sampling. If the turbidity reading does not stabilize at reading of less than 10 NTU for a given well, then both filtered and unfiltered samples should be collected from that well. If necessary, field filtration should be performed using a 0.45 micron disposable in-line filter. Groundwater samples should be collected after parameters have stabilized as noted above or the readings are within the precision of the meter. Deviations from the stabilization and drawdown criteria, if any, should be noted on the sampling logs.

Samples should be collected directly into laboratory-supplied jars. After collection, all sample jars will be capped and securely tightened, and placed in iced coolers and maintained at 4°C ±2°C until they are transferred to the laboratory for analysis, in accordance with the procedures outlined in Section 5.4. Analysis and/or extraction and digestion of collected groundwater samples will meet the holding times required for each analyte as specified in Attachment C. In addition, analysis of collected groundwater sample will meet all quality assurance criteria set forth by this QAPP and DER-10.

Sample Field Blanks and Duplicates

Field blanks will be collected for quality assurance purposes at a rate of one per 20 investigative samples per matrix (soil and groundwater only). Field blanks will be obtained by pouring laboratory-demonstrated analyte-free water on or through a decontaminated sampling device following use and implementation of decontamination protocols. The water will be collected off of the sampling device into a laboratory-provided sample container for analysis. Field blank samples will be analyzed for the complete list of analytes on the day of sampling. Trip blanks will be collected at a rate of one per day if soil samples are analyzed for VOCs during that day.

Duplicate soil samples will be collected and analyzed for quality assurance purposes. Duplicate samples will be collected at a frequency of 1 per 20 investigative samples per matrix and will be submitted to the laboratory as “blind” samples. If less than 20 samples are collected during a particular sampling event, one duplicate sample will be collected.

5.4 SAMPLE CONTAINERS AND HANDLING

Certified, commercially clean sample containers will be obtained from the analytical laboratory. If soil or groundwater samples are being collected, the laboratory will also

prepare and supply the required trip blanks and field blank sample containers and reagent preservatives. Sample bottle containers, including the field blank containers, will be placed into plastic coolers by the laboratory. These coolers will be received by the field sampling team within 24 hours of their preparation in the laboratory. Prior to the commencement of field work, Langan field personnel will fill the plastic coolers with ice in Ziploc® bags (or equivalent) to maintain a temperature of $4^{\circ} \pm 2^{\circ}$ C.

Soil and/or groundwater samples collected in the field for laboratory analysis will be placed directly into the laboratory-supplied sample containers. Samples will then be placed and stored on-ice in laboratory provided coolers until shipment to the laboratory. The temperature in the coolers containing samples and associated field blanks will be maintained at a temperature of $4^{\circ} \pm 2^{\circ}$ C while on-site and during sample shipment to the analytical laboratory.

Possession of samples collected in the field will be traceable from the time of collection until they are analyzed by the analytical laboratory or are properly disposed. Chain-of-custody procedures, described in Section 5.9, will be followed to maintain and document sample possession. Samples will be packaged and shipped as described in Section 5.6.

5.5 SAMPLE PRESERVATION

Sample preservation measures will be used in an attempt to prevent sample decomposition by contamination, degradation, biological transformation, chemical interactions and other factors during the time between sample collection and analysis. Preservation will commence at the time of sample collection and will continue until analyses are performed. Should chemical preservation be required, the analytical laboratory will add the preservatives to the appropriate sample containers before shipment to the office or field. Samples will be preserved according to the requirements of the specific analytical method selected, as shown in Attachment C.

5.6 SAMPLE SHIPMENT

5.6.1 Packaging

Air sample canisters can be stored and transported without additional packaging. Soil and groundwater sample containers will be placed in plastic coolers. Ice in Ziploc® bags (or equivalent) will be placed around sample containers. Cushioning material will be added around the sample containers if necessary. Chains-of-custody and other

paperwork will be placed in a Ziploc® bag (or equivalent) and placed inside the cooler. The cooler will be taped closed and custody seals will be affixed to one side of the cooler at a minimum. If the samples are being shipped by an express delivery company (e.g. FedEx) then laboratory address labels will be placed on top of the cooler.

5.6.2 Shipping

Standard procedures to be followed for shipping environmental samples to the analytical laboratory are outlined below.

- All environmental samples will be transported to the laboratory by a laboratory-provided courier under the chain-of-custody protocols described in Section 5.9.
- Prior notice will be provided to the laboratory regarding when to expect shipped samples. If the number, type or date of shipment changes due to site constraints or program changes, the laboratory will be informed.

5.7 DECONTAMINATION PROCEDURES

Decontamination procedures will be used for non-dedicated sampling equipment. Decontamination of field personnel is discussed in the CHASP included in Appendix B of the IRM Work Plan. Field sampling equipment that is to be reused will be decontaminated in the field in accordance with the following procedures:

1. Laboratory-grade glassware detergent and tap water scrub to remove visual contamination
2. Generous tap water rinse
3. Distilled/de-ionized water rinse
4. Air dried

5.8 RESIDUALS MANAGEMENT

Debris (e.g., paper, plastic and disposable PPE) will be collected in plastic garbage bags and disposed of as non-hazardous industrial waste. Debris is expected to be transported to a local municipal landfill for disposal. If applicable, residual solids (e.g., leftover soil cuttings) will be placed back in the borehole from which it was sampled. If gross contamination is observed, soil will be collected and stored in Department of Transportation (DOT)-approved 55-gallon drums in a designated storage area at the Site.

The residual materials stored in a designated storage area at the site for further characterization, treatment or disposal.

Residual fluids (such as purge water) will be collected and stored in DOT-approved (or equivalent) 55-gallon drums in a designated storage area at the site. The residual fluids will be transported to the on-site wastewater treatment plant or analyzed, characterized and disposed off-site in accordance with applicable federal and state regulations. Residual fluids such as decontamination water may be discharged to the ground surface, however, if gross contamination is observed, the residual fluids will be collected, stored, and transported similar purge water or other residual fluids.

5.9 CHAIN-OF-CUSTODY PROCEDURES

A chain-of-custody protocol has been established for collected samples that will be followed during sample handling activities in both field and laboratory operations. The primary purpose of the chain-of-custody procedures is to document the possession of the samples from collection through shipping, storage and analysis to data reporting and disposal. Chain-of-custody refers to actual possession of the samples. Samples are considered to be in custody if they are within sight of the individual responsible for their security or locked in a secure location. Each person who takes possession of the samples, except the shipping courier, is responsible for sample integrity and safe keeping. Chain-of-custody procedures are provided below:


- Chain-of-custody will be initiated by the laboratory supplying the pre-cleaned and prepared sample containers. Chain-of-custody forms will accompany the sample containers.
- Following sample collection, the chain-of-custody form will be completed for the sample collected. The sample identification number, date and time of sample collection, analysis requested and other pertinent information (e.g., preservatives) will be recorded on the form. All entries will be made in waterproof, permanent blue or black ink.
- Langan field personnel will be responsible for the care and custody of the samples collected until the samples are transferred to another party, dispatched to the laboratory, or disposed. The sampling team leader will be responsible for enforcing chain-of-custody procedures during field work.
- When the form is full or when all samples have been collected that will fit in a single cooler, the sampling team leader will check the form for possible errors

and sign the chain-of-custody form. Any necessary corrections will be made to the record with a single strike mark, dated, and initialed.

If soil and/or groundwater samples are collected, sample coolers will be accompanied by the chain-of-custody form, sealed in a Ziploc® bag (or equivalent) and placed on top of the samples or taped to the inside of the cooler lid. If applicable, a shipping bill will be completed for each cooler and the shipping bill number recorded on the chain-of-custody form.

Samples will be packaged for shipment to the laboratory with the appropriate chain-of-custody form. A copy of the form will be retained by the sampling team for the project file and the original will be sent to the laboratory with the samples. Bills of lading will also be retained as part of the documentation for the chain-of-custody records, if applicable. When transferring custody of the samples, the individuals relinquishing and receiving custody of the samples will verify sample numbers and condition and will document the sample acquisition and transfer by signing and dating the chain-of-custody form. This process documents sample custody transfer from the sampler to the analytical laboratory. A flow chart showing a sample custody process is included as Figure 5.1, and chain-of-custody forms from York are included as Figures 5.2 and 5.3.

Figure 5.1 Sample Custody

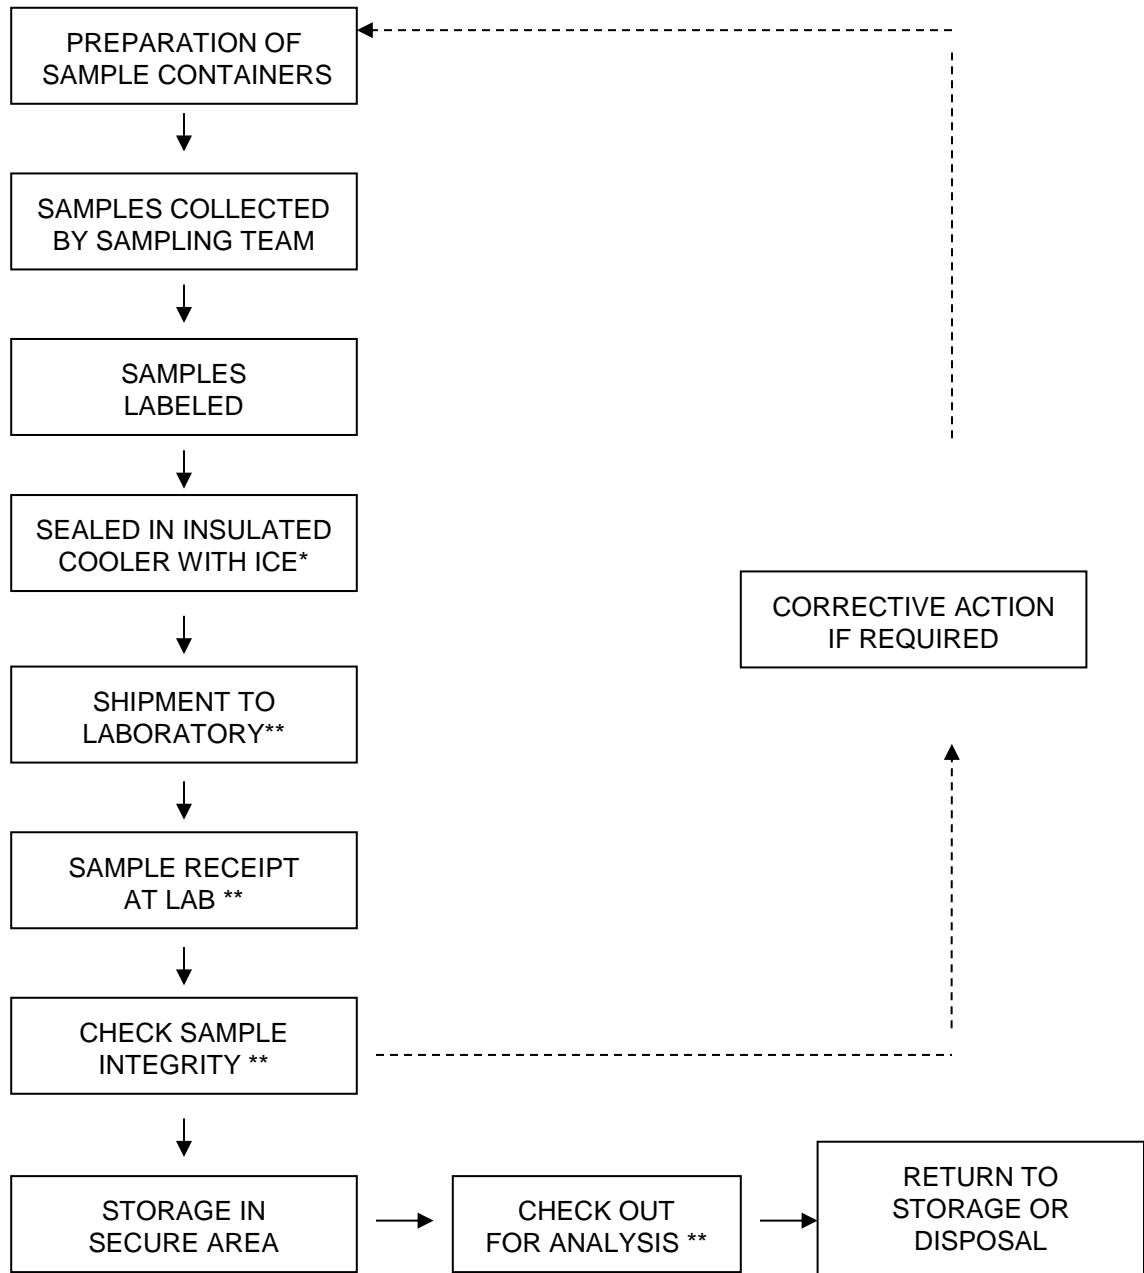


*SUMMA CANISTERS SHOULD NOT BE ICED
** REQUIRES SIGN-OFF ON CHAIN-OF-CUSTODY FORM

Figure 5.2 Sample Chain-of-Custody Form – Air Sample

Page ____ of ____

YORK ANALYTICAL LABORATORIES, INC.		Field Chain-of-Custody Record - AIR		York Project No. _____		
120 Research Dr. Stratford, CT 06615 (203) 325-1371 Fax (203) 357-0166		NOTE: York's Std. Terms & Conditions are listed on the back side of this document. This document serves as your written authorization to York to proceed with the analyses requested and your signature binds you to York's Std. Terms & Conditions unless superseded by written contract.		York Project No. _____		
YOUR Information		Report To:		Invoice To:		
Company: _____ Address: _____ Phone No: _____ Contact Person: _____ E-Mail Address: _____	Company: _____ Address: _____ Phone No: _____ Attention: _____ E-Mail Address: _____	Company: _____ Address: _____ Phone No: _____ Attention: _____ E-Mail Address: _____	YOUR Project ID Purchase Order No. _____ Samples from: CT NY NJ			
Print Clearly and Legibly. All information must be complete. Samples will NOT be logged in and the turn-around time clock will not begin until any questions by York are resolved. Samples Collected/Authorized By (Signature) _____ Name (printed) _____		AIR Matrix Codes AI - INDOOR Ambient Air AO - OUTDOOR Amb. Air AE- Vapor Extraction Well/ Process Gas Effluent AS- SOIL Vapor/Sub-Slab			TO15 Volatiles and Other Gas Analyses EPA TO-15 List NYSDEC VI list NYSDEC STARS List Project Specific List by TO-15 NIDEP Target List CTDEP RCP Target List	
		Tentatively Identified Compounds Air VPH Helium Methane OTHER			Detection Limits Required ≤ 1 ug/m ³ NYSDEC VI Limits (10-1000 ug/m ³) NIDEP low level Routine Survey Other	
Sample Identification	Date Sampled	AIR Matrix	Canister Vacuum Before Sampling (in. Hg)	Canister Vacuum After Sampling (in. Hg)	Choose Analyses Needed from the Menu Above, and Enter Below	
Comments						
Samples Relinquished By _____		Date/Time _____		Samples Received By _____		
Samples Relinquished By _____		Date/Time _____		Samples Received in LAB by _____		

Figure 5.3 Sample Chain-of-Custody Form – Soil and Groundwater



CHAIN OF CUSTODY RECORD / ANALYSIS REQUEST

PROJECT INFORMATION

Proj. Name: _____ Proj. No: _____
 Site Location: _____ Auth. By: _____
 Sampled By: _____ Phone No: _____
 Company: _____

ANALYSIS REQUESTED

Grab Inorg/PHC No. of

 Matrix Comp. Preserve. Cont.

PAGE _____ OF _____

Sample Number	Location	Depth	Date	Time	Matrix	Comp.	Preserve.	Cont.	COMMENTS

Metals Filtered (Yes/No)? _____ Total No. of Containers: _____
 Aq. VOAs Pres. (Yes/No)? _____
 Rush T/A, Report format, Contingent analysis: _____

(1) Relinquished By: _____
 DATE: _____
 TIME: _____
 Company: _____

Received By: _____
 DATE: _____
 TIME: _____
 Company: _____

(3) Relinquished By: _____
 DATE: _____
 TIME: _____
 Company: _____

Received By: _____
 DATE: _____
 TIME: _____
 Company: _____

(2) Relinquished By: _____
 DATE: _____
 TIME: _____
 Company: _____

Received By: _____
 DATE: _____
 TIME: _____
 Company: _____

(4) Relinquished By: _____
 DATE: _____
 TIME: _____
 Company: _____

Received By: _____
 DATE: _____
 TIME: _____
 Company: _____

Laboratory Name & Address: _____

Laboratory chains-of-custody will be maintained throughout the analytical processes as described in the laboratory's Quality Assurance Manual. The analytical laboratory will provide a copy of the chain-of-custody in the analytical data deliverable package. The chain-of-custody becomes the permanent record of sample handling and shipment.

5.10 LABORATORY SAMPLE STORAGE PROCEDURES

The subcontracted laboratory will use a laboratory information management system (LIMS) to track and schedule samples upon receipt by the analytical laboratories. Any sample anomalies identified during sample log-in must be evaluated on individual merit for the impact upon the results and the data quality objectives of the project. When irregularities do exist, the environmental consultant must be notified to discuss recommended courses of action and documentation of the issue must be included in the project file.

For samples requiring thermal preservation, the temperature of each cooler will be immediately recorded. Each sample and container will be assigned a unique laboratory identification number and secured within the custody room walk-in coolers designated for new samples. Samples will be, as soon as practical, disbursed in a manner that is functional for the operational team. The temperature of all coolers and freezers will be monitored and recorded using a certified temperature sensor. Any temperature excursions outside of acceptance criteria (i.e., below 2°C or above 6°C) will initiate an investigation to determine whether any samples may have been affected. Samples for VOCs will be maintained in satellite storage areas within the VOC laboratory. Following analysis, the laboratory's specific procedures for retention and disposal will be followed as specified in the laboratory's SOPs and/or QA manual.

6.0 DATA REDUCTION, VALIDATION, AND REPORTING

6.1 INTRODUCTION

Data collected during the field investigation will be reduced and reviewed by the laboratory QA personnel, and a report on the findings will be tabulated in a standard format. The criteria used to identify and quantify the analytes will be those specified for the applicable methods in the USEPA SW-846 and subsequent updates. The data package provided by the laboratory will contain all items specified in the USEPA SW-846 appropriate for the analyses to be performed, and be reported in standard format.

The completed copies of the chain-of-custody records (both external and internal) accompanying each sample from time of initial bottle preparation to completion of analysis shall be attached to the analytical reports.

6.2 DATA REDUCTION

The Analytical Services Protocol (ASP) Category B data packages and an electronic data deliverable (EDD) will be provided by the laboratory after receipt of a complete sample delivery group. The Project Manager will immediately arrange for archiving the results and preparation of result tables. These tables will form the database for assessment of the site contamination condition.

Each EDD deliverable must be formatted using a Microsoft Windows operating system and the NYSDEC data deliverable format for EQulS. To avoid transcription errors, data will be loaded directly into the ASCII format from the laboratory information management system (LIMS). If this cannot be accomplished, the consultant should be notified via letter of transmittal indicating that manual entry of data is required for a particular method of analysis. All EDDs must also undergo a QC check by the laboratory before delivery. The original data, tabulations, and electronic media are stored in a secure and retrievable fashion.

The Project Manager or Task Manager will maintain close contact with the QA reviewer to ensure all non-conformance issues are acted upon prior to data manipulation and assessment routines. Once the QA review has been completed, the Project Manager may direct the Team Leaders or others to initiate and finalize the analytical data assessment.

6.3 DATA VALIDATION

Data validation will be performed in accordance with the USEPA validation guidelines for organic and inorganic data review. Validation will include the following:

- Verification of the QC sample results,
- Verification of the identification of sample results (both positive hits and non-detects),
- Recalculation of 10% of all investigative sample results, and
- Preparation of Data Usability Summary Reports (DUSR).

A DUSR will be prepared and reviewed by the QAO before issuance. The DUSR will present the results of data validation, including a summary assessment of laboratory data packages, sample preservation and COC procedures, and a summary assessment of precision, accuracy, representativeness, comparability, and completeness for each analytical method. A detailed assessment of each SDG will follow. For each of the organic analytical methods, the following will be assessed:

- Holding times;
- Instrument tuning;
- Instrument calibrations;
- Blank results;
- System monitoring compounds or surrogate recovery compounds (as applicable);
- Internal standard recovery results;
- MS and MSD results;
- Target compound identification;
- Chromatogram quality;
- Pesticide cleanup (if applicable);
- Compound quantitation and reported detection limits;
- System performance; and
- Results verification.

For each of the inorganic compounds, the following will be assessed:

- Holding times;
- Calibrations;
- Blank results;
- Interference check sample;
- Laboratory check samples;
- Duplicates;
- Matrix Spike;
- Furnace atomic absorption analysis QC;
- ICP serial dilutions; and
- Results verification and reported detection limits.

Based on the results of data validation, the validated analytical results reported by the laboratory will be assigned one of the following usability flags:

- "U" - Not detected. The associated number indicates the approximate sample concentration necessary to be detected significantly greater than the level of the highest associated blank;
- "UJ" - Not detected. Quantitation limit may be inaccurate or imprecise;
- "J" - Analyte is present. Reported value may be associated with a higher level of uncertainty than is normally expected with the analytical method
- "N" – Tentative identification. Analyte is considered present in the sample;
- "R" – Unreliable result; data is rejected or unusable. Analyte may or may not be present in the sample; and
- No Flag - Result accepted without qualification.

7.0 QUALITY ASSURANCE PERFORMANCE AUDITS AND SYSTEM AUDITS

7.1 INTRODUCTION

Quality assurance audits may be performed by the project quality assurance group under the direction and approval of the QAO. These audits will be implemented to evaluate the capability and performance of project and subcontractor personnel, items, activities, and documentation of the measurement system(s). Functioning as an independent body and reporting directly to corporate quality assurance management, the QAO may plan, schedule, and approve system and performance audits based upon procedures customized to the project requirements. At times, the QAO may request additional personnel with specific expertise from company and/or project groups to assist in conducting performance audits. However, these personnel will not have responsibility for the project work associated with the performance audit.

7.2 SYSTEM AUDITS

System audits may be performed by the QAO or designated auditors, and encompass a qualitative evaluation of measurement system components to ascertain their appropriate selection and application. In addition, field and laboratory quality control procedures and associated documentation may be system audited. These audits may be performed once during the performance of the project. However, if conditions adverse to quality are detected or if the Project Manager requests, additional audits may occur.

7.3 PERFORMANCE AUDITS

The laboratory may be required to conduct an analysis of Performance Evaluation samples or provide proof that Performance Evaluation samples submitted by USEPA or a state agency have been analyzed within the past twelve months.

7.4 FORMAL AUDITS

Formal audits refer to any system or performance audit that is documented and implemented by the QA group. These audits encompass documented activities performed by qualified lead auditors to a written procedure or checklists to objectively verify that quality assurance requirements have been developed, documented, and instituted in accordance with contractual and project criteria. Formal audits may be performed on project and subcontractor work at various locations.

Audit reports will be written by auditors who have performed the site audit after gathering and evaluating all data. Items, activities, and documents determined by lead auditors to be in noncompliance shall be identified at exit interviews conducted with the involved management. Non-compliances will be logged, and documented through audit findings, which are attached to and are a part of the integral audit report. These audit-finding forms are directed to management to satisfactorily resolve the noncompliance in a specified and timely manner.

The Project Manager has overall responsibility to ensure that all corrective actions necessary to resolve audit findings are acted upon promptly and satisfactorily. Audit reports must be submitted to the Project Manager within fifteen days of completion of the audit. Serious deficiencies will be reported to the Project Manager within 24 hours. All audit checklists, audit reports, audit findings, and acceptable resolutions are approved by the QAO prior to issue. Verification of acceptable resolutions may be determined by re-audit or documented surveillance of the item or activity. Upon verification acceptance, the QAO will close out the audit report and findings.

8.0 CORRECTIVE ACTION

8.1 INTRODUCTION

The following procedures have been established to ensure that conditions adverse to quality, such as malfunctions, deficiencies, deviations, and errors, are promptly investigated, documented, evaluated, and corrected.

8.2 PROCEDURE DESCRIPTION

When a significant condition adverse to quality is noted at site, laboratory, or subcontractor location, the cause of the condition will be determined and corrective action will be taken to preclude repetition. Condition identification, cause, reference documents, and corrective action planned to be taken will be documented and reported to the QAO, Project Manager, Field Team Leader and involved contractor management, at a minimum. Implementation of corrective action is verified by documented follow-up action.

All project personnel have the responsibility, as part of the normal work duties, to promptly identify, solicit approved correction, and report conditions adverse to quality. Corrective actions will be initiated as follows:

- When predetermined acceptance standards are not attained;
- When procedure or data compiled are determined to be deficient;
- When equipment or instrumentation is found to be faulty;
- When samples and analytical test results are not clearly traceable;
- When quality assurance requirements have been violated;
- When designated approvals have been circumvented;
- As a result of system and performance audits;
- As a result of a management assessment;
- As a result of laboratory/field comparison studies; and
- As required by USEPA SW-846, and subsequent updates, or by the NYSDEC ASP.

Project management and staff, such as field investigation teams, remedial response planning personnel, and laboratory groups, monitor on-going work performance in the

normal course of daily responsibilities. Work may be audited at the sites, laboratories, or contractor locations. Activities, or documents ascertained to be noncompliant with quality assurance requirements will be documented. Corrective actions will be mandated through audit finding sheets attached to the audit report. Audit findings are logged, maintained, and controlled by the Task Manager.

Personnel assigned to quality assurance functions will have the responsibility to issue and control Corrective Action Request (CAR) Forms (Figure 12.1 or similar). The CAR identifies the out-of-compliance condition, reference document(s), and recommended corrective action(s) to be administered. The CAR is issued to the personnel responsible for the affected item or activity. A copy is also submitted to the Project Manager. The individual to whom the CAR is addressed returns the requested response promptly to the QA personnel, affixing his/her signature and date to the corrective action block, after stating the cause of the conditions and corrective action to be taken. The QA personnel maintain the log for status of CARs, confirms the adequacy of the intended corrective action, and verifies its implementation. CARs will be retained in the project file for the records.

Any project personnel may identify noncompliance issues; however, the designated QA personnel are responsible for documenting, numbering, logging, and verifying the close out action. The Project Manager will be responsible for ensuring that all recommended corrective actions are implemented, documented, and approved.

Figure 8.1 Corrective Action Request

CORRECTIVE ACTION REQUEST					
Number: _____		Date: _____			
TO: _____ You are hereby requested to take corrective actions indicated below and as otherwise determined by you to (a) resolve the noted condition and (b) to prevent it from recurring. Your written response is to be returned to the project quality assurance manager by _____					
CONDITION:					
REFERENCE DOCUMENTS:					
RECOMMENDED CORRECTIVE ACTIONS:					
_____	_____	_____	_____	_____	_____
Originator	Date	Approval	Date	Approval	Date
RESPONSE					
CAUSE OF CONDITION					
CORRECTIVE ACTION					
(A) RESOLUTION					
(B) PREVENTION					
(C) AFFECTED DOCUMENTS					
C.A. FOLLOWUP:					
CORRECTIVE ACTION VERIFIED BY: _____ DATE: _____					

9.0 REFERENCES

NYSDEC. Division of Environmental Remediation. DER-10/Technical Guidance for Site Investigation and Remediation, dated May 3, 2010.

NYSDOH. Final Guidance for Evaluating Soil Vapor Intrusion in the State of New York, dated October 2006.

Taylor, J. K., 1987. Quality Assurance of Chemical Measurements. Lewis Publishers, Inc., Chelsea, Michigan

USEPA, 1987. Data Quality Objectives for Remedial Response Actions Activities: Development Process, EPA/540/G-87/003, OSWER Directive 9355.0-7- U.S. Environmental Protection Agency, Washington, D.C.

USEPA, 2012. Evaluation of Metals Data for the Contract Laboratory Program (CLP) based on SOW 3/90. SOP No. HW-2, Revision 15, dated December 2012. USEPA Region II.

USEPA, 2014a. Hazardous Waste Support Section. Analysis of Volatile Organic Compounds in Air Contained in Canisters by Method TO-15. SOP No. HW-31, Revision #6, dated June 2014.

USEPA, 2014b. Test Method for Evaluating Solid Waste, SW-846 Update V, Revision 8, dated July 2014 U.S. Environmental Protection Agency, Washington, D.C.

Attachment A
Résumés

Emily G. Strake

**Project Chemist/ Risk Assessor
Human Health Risk Assessment
Chemical Data Validation**



15 years in the industry ~ 2 years with Langan

Ms. Strake has fifteen years of environmental chemistry, risk assessment, auditing, and quality assurance experience. Most recently, she has focused her efforts on human health risk assessment, and has been the primary author or key contributor of risk assessment reports and screening evaluations for projects governed under RCRA, CERCLA, SWRCB, DTSC, DNREC, PADEP, NJDEP, CTDEEP, ODEQ, NYSDEC and MDE. She has experience in site-specific strategy development, which has enabled her to perform assessments to focus areas of investigation and identify risk-based alternatives for reducing remediation costs. Ms. Strake is a member of the Interstate Technology and Regulatory Council Risk Assessment Team responsible for the development and review of organizational risk assessment guidance documents and serves as a National Trainer in risk assessment for the organization.

Ms. Strake has over nine years of experience assessing potential adverse health effect to humans from exposure to hazardous contaminants in soil, sediment, groundwater, surface water, ambient and indoor air, and various types of animal, fish, and plant materials. She understands and applies environmental cleanup guidance and policies associated with multiple federal and state agencies. Additionally, she has broad experience in the development of preliminary remediation goals and site-specific action levels. She is proficient with the USEPA and Cal/EPA Johnson and Ettinger Model for Subsurface Vapor Intrusion into Buildings, USEPA's Adult Lead Methodology, DTSC's Leadsread 7 and 8, and statistical evaluation of data using USEPA's ProUCL software.

Ms. Strake has extensive experience in environmental data validation, focused on ensuring laboratory deliverables follow specific guidelines as described by regulatory agencies and the analytical methods employed. In addition, she has experience in EQUS chemical database management. She also has a broad range of environmental field experience and maintains current OSHA HAZWOPER certification.

Ms. Strake is experienced in auditing laboratory and field-sampling activities for compliance with Quality Assurance Project Plans (QAPPs), the National Environmental Laboratory Accreditation Conference Standards Quality Systems manual, and applicable USEPA Guidance. Ms. Strake has also audited on-site laboratories in support of groundwater treatment operations and implemented corrective actions. Her responsibilities include writing reports on the value of laboratory work, writing/editing QAPPs for clients and project-specific sites, peer reviewing colleague's work, and mentoring staff within the office. She has also served as the Quality Assurance officer for several long-term projects, responsible for the achievement of all forms of Quality Control/Quality Assurance by onsite personnel relating to sampling, analysis, and data evaluation.

Ms. Strake has several years' experience analyzing investigative samples, writing laboratory Standard Operating Procedures (SOPs), and managing all

Education

M.B.A., Business Administration
The University of Scranton

B.S., Chemistry
Cedar Crest College

Memberships

Interstate Technology and
Regulatory Council

Society for Risk Analysis

Training

Candidate, Certified Industrial
Environmental Toxicologist. National
Registry of Environmental Professionals.

40 hr. OSHA HAZWOPER Training/Nov
2002

8 hr. HAZWOPER Supervisor/June 2004

8 hr. OSHA HAZWOPER Refresher/Oct
2012

American Red Cross First Aid & CPR
certified

Publications/Presentations

*Decision Making at Contaminated
Sites: Issues and Options in Human
Health Risk Assessment.* Interstate
Technology and Regulatory Council

*Alternate Approaches for Act 2 Risk
Assessments Using Site-Specific
Information.* Pennsylvania Brownfields
Conference

*Tools from NJDEP's Attainment
Guidance to Support Site Closure*
LSRP Summit V

*EPA Region IX Vapor Intrusion Policy
for Silicon Valley*
2014 Environmental Workshop

LANGAN

Emily G. Strake

aspects of procedures and analyses for Optical Emission Spectrometry, X-Ray Fluorescence, Ignition analysis, and Atomic Absorption. Her experience also includes operating and performing routine instrument maintenance for GC/MS and IR. Ms. Strake has worked extensively on developing rapid soil characterization programs for PCB and pesticide analyses utilizing enzyme-linked immunosorbent assays, and was also involved in efforts to develop new instrumentation to quantify microbial nitrification of ammonium.

Selected Project Experience

Human Health Risk Assessment

- Major League Soccer's San Jose Earthquakes Stadium – Utilized the Johnson and Ettinger advanced soil gas model to calculate risk and hazard associated with inhalation of chlorinated solvents for the redevelopment of a public soccer stadium. Soil gas data was modeled assuming three soil stratum and site-specific soil, building, and exposure parameters. The Earthquakes' stadium is set to open in 2015.
- Exelon - Developed a human health risk assessment for a utility-owned former Manufactured Gas Plant (MGP) site in Pennsylvania, under Pennsylvania's Act 2 Program. Used ProUCL 4.0 statistical software to determine upper limits for full data sets and non-detect data. Conducted vapor intrusion modeling (via the Johnson & Ettinger model) and prepared vapor intrusion reports showing that risks to volatile organic compounds in soils and groundwater were not impacting indoor air quality.
- Texas Instruments – Participated in a collaboration with Robert Ettinger and Geosyntec Consulting to develop comments to USEPA Region IX and the San Francisco Regional Water Quality Control Board regarding vapor intrusion at South Bay Superfund Sites. The focus of the response was to outline scientific and policy objections to EPA's recommended TCE interim short-term indoor air response action levels and guidelines, and to clarify the use of California-modified indoor air screening levels for assessing and responding to TCE and PCE subsurface vapor intrusion into indoor air.
- DuPont - Worked as a key participant in the human health risk evaluation of mercury associated with legacy contamination of the South River located in Waynesboro, Virginia.
- Veteran's Affairs - Completed a human health risk evaluation of the potential future risk associated with inhalation of indoor air for the Veteran's Administration. Soil, soil gas, and groundwater samples were collected as part of the site characterization. Achieved DTSC approval of the risk assessment approach and conclusions.
- Santa Clara Landfill – Developed a human health risk assessment to characterize risk associated with exposure to landfill gas at the Santa Clara All Purpose Landfill. The risk assessment evaluated specific compounds in landfill gas, their concentrations, spatial patterns, and extent throughout the site, and assessed the potential for vapor intrusion associated with a proposed future redevelopment.
- Avon - Completed a human health risk assessment in accordance with NYSDEC guidance for a redevelopment property located in Rye, New York. The objective of the evaluation was to characterize the risks associated with potential future human

exposures to soil and groundwater affected by a release from the Site's former No. 2 fuel oil UST. The intended future use of the Site was a playground to be utilized by the general public for open play on commercial recreational equipment.

- Golden Gate National Parks Conservancy – Peer reviewed a Preliminary Endangerment Assessment Report for the Battery East Trail. The assessment included a human health risk evaluation that estimated carcinogenic risk from exposure to PAHs and dioxin/furans in soil using toxic equivalency to benzo(a)pyrene and 2,3,7,8-TCDD.
- Sunoco Refineries – Derived site-specific soil PRGs for lead using the EPA's adult lead model for two former Sunoco refineries. Completed receptor evaluations in accordance with USEPA risk assessment guidance to develop exposure parameters under current and reasonably anticipated future land use scenarios.
- Honeywell - Completed a focused human health risk evaluation of PAH contaminants for under NJDEP's Site Remediation Program. Applied a blended approach of qualitative risk characterization and quantitative risk calculation to propose closure of AOCs following the remedial investigation.
- Delaware City Refinery - Performed comprehensive human health risk assessment for a petroleum refinery in Delaware City, Delaware. The risk assessment was the basis for a thorough characterization and assessment of potential risks posed by site-specific conditions. Developed various human exposure scenarios by using both Federal and State-Specific guidance for soil, groundwater, and surface water exposure.
- Occidental Chemical - Completed multiple AOC-specific risk assessments utilizing and applying the guidance set forth by the DTSC's Human Health Risk Assessment Note 1 (Default Exposure Factors for Use in Risk Assessment), Note 3 (Recommended Methodology for Use of USEPA Regional Screening Levels, and Note 4 (Screening Level Human Health Risk Assessments).
- Floreffe Terminal - Performed human health risk assessment for contamination resulting from a 3.9 million gallon diesel oil tank collapse along the Monongahela River. Evaluated potential impacts to human health via exposure to soil, groundwater, and surface water. Calculated site-specific standards for soil remediation.
- DOW Chemical - Calculated Medium Specific Concentrations (MSCs) for unregulated contaminants using the PADEP protocols to assist in the clean-up of a monomer tank explosion in Bristol, Pennsylvania. Selected appropriate surrogate toxicity data and evaluated novel on-site constituents by analogy.
- Ryder – Developed Alternative Direct Exposure Criteria for PAH-impacted fill material at a commercial facility. Site-specific soil screening levels for incidental ingestion of soil were calculated following a forward risk evaluation for current on-site receptors.
- Rohm and Haas - Prepared an Act 2 site-specific human health risk assessment for the oldest industrial facility in the United States, located in southeast Philadelphia. The objective of the risk assessment was to determine achievable possible future land-use options under Pennsylvania's Land Recycling Program. The risk assessment included evolution of multiple site-COPCs and constituent suites: VOCs, SVOCs, PCBs, pesticides, and metals

Emily G. Strake

(including lead). Evaluated the potential for indoor air inhalation through J&E modeling of soil gas and groundwater.

- Regency - Conducted vapor intrusion modeling for a dry cleaning facility in the Philadelphia area. Predictive modeling using the Johnson and Ettinger approach indicated that estimated contaminant levels would not adversely affect human receptors.

Chemical Data Quality

- Audited multiple accredited laboratories in New Jersey and Pennsylvania on behalf of clients using USEPA Guidance on Technical Audits and Related Assessments for Environmental Data Operations. The audits included full-suite USEPA and SW-846 methodology; and included reviewing staff experience and training records, equipment and facilities, policies, practices, procedures, and documentation for sample receipt, analysis, instrument maintenance, standard preparation, calibration and traceability, control charting, corrective actions, data reduction and review, report generation, and waste disposal.
- Reviewed and validated data packages for RCRA Facilities Investigation at a Philadelphia-area chemical site; issued data validation reports to project personnel and regulatory agencies. The reviews included evaluation of quarterly groundwater, soil, and soil vapor matrices. Participated in RCRA groundwater sampling, developed and executed the investigation's QAPP, and coordinated with the laboratory to schedule and perform field-sampling events.
- Completed Data Usability Summary Reports in accordance with NYSDEC DER-10 guidance for soil, groundwater, sediment surface water, soil gas, ambient air and indoor air analytical results.
- Acted as the Quality Assurance Officer for several long-term projects in Pennsylvania, Maryland, and New Jersey, Delaware, responsible for the achievement of all forms of QA/QC as it related to sampling, analysis, and data evaluation.
- Participated in a CERCLA site investigation; assessed the usability of sample results for numerous matrices including dust, sediment, soils, and various aqueous matrices for a remedial investigation under the Contract Laboratory Program. Implemented an on-site pesticide immunoassay program to delineate soil contamination in real-time.
- EQUIS data manager for database migration of historical groundwater results associated with remediation activities; assisted with natural attenuation data evaluation and gained experience in geochemical trends associated with intrinsic biodegradation.
- Coordinated the collection of fish tissue samples and determined the validity of the analytical results associated with CERCLA and RCRA site characterizations. Assessed duck blood analytical results for the Connecticut Department of Energy and Environmental Protection Bureau of Natural Resources.

Jennifer Armstrong, LEED AP

Project Scientist

Environmental Scientist & Remedial Oversight



13 years in the industry

Ms. Armstrong has 13 years of experience working on environmental projects in New York. She has conducted Phase I and II Environmental Site Assessments, remedial investigations, soil vapor and indoor air quality surveys, and waste characterization investigations. She has also developed remedial investigation and remedial action work plans and managed groundwater monitoring programs. Her field experience includes soil, soil vapor, and groundwater sampling, indoor air investigations, remedial excavation oversight, and Community Air Monitoring Program (CAMP) management. Ms. Armstrong also has several years of experience in evaluating asbestos consultants and contractors.

Selected Projects

Consolidated Edison, Governors Island, New York, NY
Gowanus Village Sites, Brooklyn, NY
West & Watts Development, New York, NY
ACME Greenpoint Sites, Brooklyn, NY
28-20 and 29-01 Borden Avenue, Long Island City,
Queens, NY
Consolidated Edison, Atlantic Ave Station, Brooklyn, NY
Highline 13, 14, 10, New York, NY
New York City School Construction Authority (NYCSCA),
Various Sites in New York City
84 West 3rd Street, New York, NY
City University of New York (CUNY), John Jay College Expansion,
New York, NY
Pelham Plaza, Pelham Manor, NY
Con Edison, East 74th Street Steam Generation Plant,
New York, NY
Former Queens County Family Court House, Queens, NY
Bronx Terminal Market, Bronx, NY
Pier 4, Bronx, NY
40 Bond Street, New York, NY
Bronx Mental Health Redevelopment Project, Bronx, NY
Silvercup West, NYPA Site, Queens, NY
New York City School Construction Authority (NYCSCA),
Queens, NY
Freshkills Landfill, Staten Island, NY
Various Phase I Assessment, Upstate New York, NY

Education

B.S., Environmental Science
Marist College

Professional Registration

LEED Accredited Professional
(LEED AP)

Jason J. Hayes, PE, LEED AP

Senior Associate/Vice President
Environmental Engineering



15 years in the industry

Mr. Hayes has experience in New York, New Jersey, Washington D.C., California, Washington, Oregon, Alaska, and Internationally. His experience includes Environmental Protection Agency (EPA), New York State (NYS) Brownfield's application, investigation, and remediation; New York City Department of Environmental Protection (NYCDEP) and New York City Office of Environmental Remediation (OER) E-designated site application, investigation, and remediation. His expertise also includes Phase I and II Environmental Site Investigations and Assessments; contaminated building cleanup and demolition; Underground Storage Tank (UST) permitting, removal specifications, and closure reporting; soil vapor intrusion investigation and mitigation system design (depressurization systems, etc.); development of groundwater contaminant plume migration models; environmental analysis; and oversight, design and specification generation for remediation operations with contaminants of concern to include polychlorinated biphenyls (PCBs), solvents, mercury, arsenic, petroleum products, asbestos, mold and lead.

Selected Projects

Confidential Location (Remediation for Mercury-Contaminated Site),
New York, NY
Confidential Location (Phase II ESI and Remedial Design for
Mercury Impacted Site), Brooklyn, NY
NYC School Construction Authority (PCB Remediation),
Various Locations, New York, NY
28-29 High Line (Phase I ESA, Phase II ESI, and Environmental
Remediation), New York, NY
Georgetown Heating Plant (Phase II ESI and Remedial Design for
Mercury Impacted Site), Washington D.C.
268 West Street (BCP Application, RI and RIWP),
New York, NY
Confidential Multiple Mixed-Use Tower Location (BCP Application, RI,
Phase I ESA, and Phase II ESI), New York, NY
Brooklyn Navy Yard Dry-Dock (NYS Voluntary Cleanup Program),
Brooklyn, NY
27-21 44th Drive (BCP Application, Remedial Investigation Phase I ESA, and
Phase II ESI), Long Island City, NY
4430 Purves Street (BCP Application, RAWP, and Phase II ESI),
Long Island City, NY
267-273 West 87th Street (BCP Application, Remedial Investigation, RIWP,
RAWP), New York, NY
New York Aquarium, Shark Tank and Animal Care Facility
(Environmental Remediation), Coney Island, NY
International Leadership Charter School (Environmental Remediation),
Bronx, NY
West & Watts (BCP Application), New York, NY

Education

M.S., Environmental Engineering
Columbia University

B.S., Chemistry, Environmental
Toxicology
Humboldt State University

Business Administration (minor)
Humboldt State University

Professional Registration

Professional Engineer (PE) in NY

LEED Accredited Professional
(LEED AP)

Troxler Certification for Nuclear
Densometer Training

CPR and First Aid Certification

OSHA 40-Hour (HAZWOPER)

OSHA HAZWOPER Site Supervisor

Affiliations

US Green Building Council,
NYC Chapter (USGBC),
Communications Committee

Urban Land Institute (ULI), member

Commercial Real Estate Development
Association (NAIOP), member

NYC Brownfield Partnership, member

LANGAN

Jason Hayes, PE, LEED AP

Hudson Yards Redevelopment (Phase I ESA and Phase II ESI),
New York, NY
627 Smith Street (RI and Report), Brooklyn, NY
Gateway Center II Retail (Phase I ESA and Phase II ESI), Brooklyn, NY
261 Hudson Street (Phase I ESA, Phase II ESI, BCP, and RAWP),
New York, NY
Riverside Center, Building Two (BCP, Phase I ESA and Phase II ESI),
New York, NY
New York Police Academy, (Sub-Slab Depressurization and Vapor
Barrier System), College Point, NY
Bronx Terminal Market (BCP, RIWP, RAWP, Phase I ESA and Phase II ESI),
Bronx, NY
Jacob Javits Convention Center (Phase I ESA and Phase II ESI),
New York, NY
Yankee Stadium Development Waterfront Park (NYSDEC Spill Sites),
Bronx, NY
Bushwick Inlet Park (Phase I ESA, Approvals for NYC E-Designation),
Brooklyn, NY
Silvercup West Residential (BCP, RIWP, RIR, RAWP, and RAA),
Long Island City, NY
29 Flatbush Residential Tower (Groundwater Studies, RIR and RAWP),
Brooklyn, NY
Gowanus Village I (BCP, RIWP and RIR), Brooklyn, NY
Sullivan Street Hotel (Site Characterization Study and Owner
Representation), New York, NY
Riker's Island Co-Generation Plant (Soil and Soil Vapor Quality
Investigations), Bronx, NY
The Shops at Atlas Park (Sub-Slab Depressurization and Vapor Barrier
Design), Glendale, NY
Memorial Sloan-Kettering Cancer Center (Subsurface and Soil Vapor
Intrusion Investigations), New York, NY
Element West 59th Street (Oversight and Monitoring of Sub-Slab
Depressurization and Vapor Barrier Systems), New York, NY
Teterboro Airport (Delineation and Remedial Oversight of Petroleum-
Contaminated Soils), Teterboro, NJ
Proposed New York JETS Stadium (Phase I ESA), New York, NY
Former Con Edison Manufactured Gas Plant Sites (Research Reports),
New York, NY
7 World Trade Center (Endpoint Sampling and Final Closure Report),
New York, NY
Peter Cooper Village, Environmental Subsurface Investigations,
New York, NY

Selected Publications, Reports, and Presentations

NYC Mayor's Office of Environmental Remediation – Big Apple Brownfield Workshop – Presented on Soil Vapor Intrusion Remedies (e.g., SSD Systems, Vapor Barriers, Modified HVAC)

New York City Brownfield Partnership – Presented on environmental considerations and complications of the Hudson yards Development

Waterfront Development Technical Course – Presented on Impacted Waterfront Planning Considerations

Paul McMahon, PE

Senior Staff Engineer
Environmental Engineering



6 years in the industry

Mr. McMahon is an environmental engineer working in the NY Metro area. He has experience with projects in the New York State Department of Environmental Conservation (NYSDEC) Brownfield Cleanup Program (BCP), Voluntary Cleanup Program (VCP) and Spill Programs and New York City Department of Environmental Protection (NYCDEP) "E" Designated and VCP sites. His field experience includes conducting Phase II Environmental Site Investigations (ESI), remedial investigations, and indoor air quality analysis Investigations, and performing remediation oversight. Mr. McMahon's most recent experience includes the preparation of investigation reports and investigation work plans, management of NYSDEC BCP remediation projects and NYSDEC spill remediation projects, design of submembrane depressurization systems, and development of remediation work plans.

Selected Projects

55 Bank Street, White Plains, NY
23-01 42nd Road, Long Island City, NY
23-10 Queens Plaza South, Long Island City, NY
Greenpoint Terminal Market, Phase II ESI, Brooklyn, NY
Brooklyn Navy Yard Dock 72, Brooklyn, NY
44-30 Purves Street, Phase II ESI, Long Island City, NY
27-21 44th Drive, Long Island City, NY
NYU Tandon School of Engineering, Brooklyn, NY
416 Kent Avenue, Brooklyn, NY
420 Kent Avenue, Brooklyn, NY
267-273 West 87th Street, New York, NY
Newburgh Waterfront Development, Phase II ESI, Newburgh, NY
322 West 57th Street, New York, NY
Hudson Yards Terra Firma and Hudson Yards Platform, New York, NY
Columbia University Manhattanville Redevelopment, New York, NY
536 West 41st Street, New York, NY
Kings Plaza Mall, Brooklyn, NY
1900 Park Avenue, Phase II ESI, New York, NY
60 West Street, Phase II ESI, Brooklyn, NY
Kingsbridge Ice Center, Phase II ESI, Bronx, NY
Pier 57, New York, NY

Education

M.E., Environmental Engineering
Manhattan College
B.S., Civil Engineering
Washington University in St. Louis

Professional Registration

Professional Engineer (PE) in NY
10 Hour OSHA
40 Hour OSHA (HAZWOPER)

Attachment B

Laboratory Reporting Limits and Method
Detection Limits

APPENDIX B
LABORATORY REPORTING LIMITS AND METHOD DETECTION LIMITS

Method	Matrix	Analyte	MDL	RL	Units
VOC					
EPA 8260C	Water	1,1,1,2-Tetrachloroethane	0.2	0.5	ug/L
EPA 8260C	Water	1,1,1-Trichloroethane	0.2	0.5	ug/L
EPA 8260C	Water	1,1,2,2-Tetrachloroethane	0.2	0.5	ug/L
EPA 8260C	Water	1,1,2-Trichloro-1,2,2-trifluoroethane (Freon 113)	0.2	0.5	ug/L
EPA 8260C	Water	1,1,2-Trichloroethane	0.2	0.5	ug/L
EPA 8260C	Water	1,1-Dichloroethane	0.2	0.5	ug/L
EPA 8260C	Water	1,1-Dichloroethylene	0.2	0.5	ug/L
EPA 8260C	Water	Bromochloromethane	0.2	0.5	ug/L
EPA 8260C	Water	1,2,3-Trichloropropane	0.2	0.5	ug/L
EPA 8260C	Water	1,2,4-Trichlorobenzene	0.2	0.5	ug/L
EPA 8260C	Water	1,2,4-Trimethylbenzene	0.2	0.5	ug/L
EPA 8260C	Water	1,2-Dibromo-3-chloropropane	0.2	0.5	ug/L
EPA 8260C	Water	1,2-Dibromoethane	0.2	0.5	ug/L
EPA 8260C	Water	1,2-Dichlorobenzene	0.2	0.5	ug/L
EPA 8260C	Water	1,2-Dichloroethane	0.2	0.5	ug/L
EPA 8260C	Water	1,2-Dichloropropane	0.2	0.5	ug/L
EPA 8260C	Water	1,3,5-Trimethylbenzene	0.2	0.5	ug/L
EPA 8260C	Water	1,3-Dichlorobenzene	0.2	0.5	ug/L
EPA 8260C	Water	1,4-Dichlorobenzene	0.2	0.5	ug/L
EPA 8260C	Water	1,4-Dioxane	40	80	ug/L
EPA 8260C	Water	Cyclohexane	0.2	0.5	ug/L
EPA 8260C	Water	2-Butanone	0.2	0.5	ug/L
EPA 8260C	Water	2-Hexanone	0.2	0.5	ug/L
EPA 8260C	Water	4-Methyl-2-pentanone	0.2	0.5	ug/L
EPA 8260C	Water	Acetone	1	2	ug/L
EPA 8260C	Water	Acrolein	0.2	0.5	ug/L
EPA 8260C	Water	Acrylonitrile	0.2	0.5	ug/L
EPA 8260C	Water	Benzene	0.2	0.5	ug/L
EPA 8260C	Water	Bromodichloromethane	0.2	0.5	ug/L
Method	Matrix	Analyte	MDL	RL	Units
VOC					
EPA 8260C	Water	Bromoform	0.2	0.5	ug/L
EPA 8260C	Water	Bromomethane	0.2	0.5	ug/L
EPA 8260C	Water	Carbon disulfide	0.2	0.5	ug/L
EPA 8260C	Water	Carbon tetrachloride	0.2	0.5	ug/L
EPA 8260C	Water	Chlorobenzene	0.2	0.5	ug/L
EPA 8260C	Water	Chloroethane	0.2	0.5	ug/L
EPA 8260C	Water	Chloroform	0.2	0.5	ug/L
EPA 8260C	Water	Chloromethane	0.2	0.5	ug/L
EPA 8260C	Water	cis-1,2-Dichloroethylene	0.2	0.5	ug/L
EPA 8260C	Water	cis-1,3-Dichloropropylene	0.2	0.5	ug/L
EPA 8260C	Water	Dibromochloromethane	0.2	0.5	ug/L
EPA 8260C	Water	Dibromomethane	0.2	0.5	ug/L
EPA 8260C	Water	Dichlorodifluoromethane	0.2	0.5	ug/L
EPA 8260C	Water	Naphthalene	1	2	ug/L
EPA 8260C	Water	Ethyl Benzene	0.2	0.5	ug/L
EPA 8260C	Water	Methylcyclohexane	0.2	0.5	ug/L
EPA 8260C	Water	Hexachlorobutadiene	0.2	0.5	ug/L
EPA 8260C	Water	Isopropylbenzene	0.2	0.5	ug/L
EPA 8260C	Water	Methyl acetate	0.2	0.5	ug/L
EPA 8260C	Water	Methyl tert-butyl ether (MTBE)	0.2	0.5	ug/L
EPA 8260C	Water	Methylene chloride	1	2	ug/L
EPA 8260C	Water	n-Butylbenzene	0.2	0.5	ug/L
EPA 8260C	Water	n-Propylbenzene	0.2	0.5	ug/L
EPA 8260C	Water	o-Xylene	0.2	0.5	ug/L
EPA 8260C	Water	p- & m- Xylenes	0.5	1	ug/L
EPA 8260C	Water	1,2,3-Trichlorobenzene	0.2	0.5	ug/L
EPA 8260C	Water	p-Isopropyltoluene	0.2	0.5	ug/L
EPA 8260C	Water	sec-Butylbenzene	0.2	0.5	ug/L
EPA 8260C	Water	Styrene	0.2	0.5	ug/L
Method	Matrix	Analyte	MDL	RL	Units

**APPENDIX B
LABORATORY REPORTING LIMITS AND METHOD DETECTION LIMITS**

VOC					
EPA 8260C	Water	tert-Butyl alcohol (TBA)	0.5	1	ug/L
EPA 8260C	Water	tert-Butylbenzene	0.2	0.5	ug/L
EPA 8260C	Water	Tetrachloroethylene	0.2	0.5	ug/L
EPA 8260C	Water	Toluene	0.2	0.5	ug/L
EPA 8260C	Water	trans-1,2-Dichloroethylene	0.2	0.5	ug/L
EPA 8260C	Water	trans-1,3-Dichloropropylene	0.2	0.5	ug/L
EPA 8260C	Water	Trichloroethylene	0.2	0.5	ug/L
EPA 8260C	Water	Trichlorofluoromethane	0.2	0.5	ug/L
EPA 8260C	Water	Vinyl Chloride	0.2	0.5	ug/L
EPA 8260C	Water	Xylenes, Total	0.6	1.5	ug/L

Method	Matrix	Analyte	MDL	RL	Units
SVOC					
EPA 8270D	Water	Acenaphthene	0.05	0.05	ug/L
EPA 8270D	Water	Acenaphthylene	0.05	0.05	ug/L
EPA 8270D	Water	Acetophenone	2.5	5	ug/L
EPA 8270D	Water	Aniline	2.5	5	ug/L
EPA 8270D	Water	Anthracene	0.05	0.05	ug/L
EPA 8270D	Water	Atrazine	0.5	0.5	ug/L
EPA 8270D	Water	Benzaldehyde	2.5	5	ug/L
EPA 8270D	Water	Benzidine	10	20	ug/L
EPA 8270D	Water	Benzo(a)anthracene	0.05	0.05	ug/L
EPA 8270D	Water	Benzo(a)pyrene	0.05	0.05	ug/L
EPA 8270D	Water	Benzo(b)fluoranthene	0.05	0.05	ug/L
EPA 8270D	Water	Benzo(g,h,i)perylene	0.05	0.05	ug/L
EPA 8270D	Water	Benzoic acid	25	50	ug/L
EPA 8270D	Water	Benzo(k)fluoranthene	0.05	0.05	ug/L
EPA 8270D	Water	Benzyl alcohol	2.5	5	ug/L
EPA 8270D	Water	Benzyl butyl phthalate	2.5	5	ug/L
EPA 8270D	Water	1,1'-Biphenyl	2.5	5	ug/L
EPA 8270D	Water	4-Bromophenyl phenyl ether	2.5	5	ug/L
EPA 8270D	Water	Caprolactam	2.5	5	ug/L
EPA 8270D	Water	Carbazole	2.5	5	ug/L
EPA 8270D	Water	4-Chloro-3-methylphenol	2.5	5	ug/L
EPA 8270D	Water	4-Chloroaniline	2.5	5	ug/L
EPA 8270D	Water	Bis(2-chloroethoxy)methane	2.5	5	ug/L
EPA 8270D	Water	Bis(2-chloroethyl)ether	2.5	5	ug/L
EPA 8270D	Water	Bis(2-chloroisopropyl)ether	2.5	5	ug/L
EPA 8270D	Water	2-Chloronaphthalene	2.5	5	ug/L
EPA 8270D	Water	2-Chlorophenol	2.5	5	ug/L
EPA 8270D	Water	4-Chlorophenyl phenyl ether	2.5	5	ug/L
EPA 8270D	Water	Chrysene	0.05	0.05	ug/L
Method	Matrix	Analyte	MDL	RL	Units
SVOC					
EPA 8270D	Water	Dibenzo(a,h)anthracene	0.05	0.05	ug/L
EPA 8270D	Water	Dibenzofuran	2.5	5	ug/L
EPA 8270D	Water	Di-n-butyl phthalate	2.5	5	ug/L
EPA 8270D	Water	1,4-Dichlorobenzene	2.5	5	ug/L
EPA 8270D	Water	1,2-Dichlorobenzene	2.5	5	ug/L
EPA 8270D	Water	1,3-Dichlorobenzene	2.5	5	ug/L
EPA 8270D	Water	3,3'-Dichlorobenzidine	2.5	5	ug/L
EPA 8270D	Water	2,4-Dichlorophenol	2.5	5	ug/L
EPA 8270D	Water	Diethyl phthalate	2.5	5	ug/L
EPA 8270D	Water	2,4-Dimethylphenol	2.5	5	ug/L
EPA 8270D	Water	Dimethyl phthalate	2.5	5	ug/L
EPA 8270D	Water	4,6-Dinitro-2-methylphenol	2.5	5	ug/L
EPA 8270D	Water	2,4-Dinitrophenol	2.5	5	ug/L
EPA 8270D	Water	2,4-Dinitrotoluene	2.5	5	ug/L
EPA 8270D	Water	2,6-Dinitrotoluene	2.5	5	ug/L
EPA 8270D	Water	Di-n-octyl phthalate	2.5	5	ug/L
EPA 8270D	Water	1,2-Diphenylhydrazine (as Azobenzene)	2.5	5	ug/L
EPA 8270D	Water	Bis(2-ethylhexyl)phthalate	0.5	0.5	ug/L
EPA 8270D	Water	Fluoranthene	0.05	0.05	ug/L
EPA 8270D	Water	Fluorene	0.05	0.05	ug/L
EPA 8270D	Water	Hexachlorobenzene	0.02	0.02	ug/L
EPA 8270D	Water	Hexachlorobutadiene	0.5	0.5	ug/L
EPA 8270D	Water	Hexachlorocyclopentadiene	2.5	5	ug/L
EPA 8270D	Water	Hexachloroethane	0.5	0.5	ug/L
EPA 8270D	Water	Indeno(1,2,3-cd)pyrene	0.05	0.05	ug/L
EPA 8270D	Water	Isophorone	2.5	5	ug/L
EPA 8270D	Water	2-Methylnaphthalene	2.5	5	ug/L
EPA 8270D	Water	2-Methylphenol	2.5	5	ug/L
EPA 8270D	Water	3- & 4-Methylphenols	2.5	5	ug/L

APPENDIX B
LABORATORY REPORTING LIMITS AND METHOD DETECTION LIMITS

Method	Matrix	Analyte	MDL	RL	Units
SVOC					
EPA 8270D	Water	Naphthalene	0.05	0.05	ug/L
EPA 8270D	Water	3-Nitroaniline	2.5	5	ug/L
EPA 8270D	Water	4-Nitroaniline	2.5	5	ug/L
EPA 8270D	Water	2-Nitroaniline	2.5	5	ug/L
EPA 8270D	Water	Nitrobenzene	0.25	0.25	ug/L
EPA 8270D	Water	4-Nitrophenol	2.5	5	ug/L
EPA 8270D	Water	2-Nitrophenol	2.5	5	ug/L
EPA 8270D	Water	N-nitroso-di-n-propylamine	2.5	5	ug/L
EPA 8270D	Water	N-Nitrosodimethylamine	0.5	0.5	ug/L
EPA 8270D	Water	N-Nitrosodiphenylamine	2.5	5	ug/L
EPA 8270D	Water	Pentachlorophenol	0.25	0.25	ug/L
EPA 8270D	Water	Phenanthrene	0.05	0.05	ug/L
EPA 8270D	Water	Phenol	2.5	5	ug/L
EPA 8270D	Water	Pyrene	0.05	0.05	ug/L
EPA 8270D	Water	Pyridine	2.5	5	ug/L
EPA 8270D	Water	1,2,4,5-Tetrachlorobenzene	2.5	5	ug/L
EPA 8270D	Water	2,3,4,6-Tetrachlorophenol	2.5	5	ug/L
EPA 8270D	Water	1,2,4-Trichlorobenzene	2.5	5	ug/L
EPA 8270D	Water	2,4,6-Trichlorophenol	2.5	5	ug/L
EPA 8270D	Water	2,4,5-Trichlorophenol	2.5	5	ug/L

Method	Matrix	Analyte	MDL	RL	Units
Pesticides					
EPA 8081B	Water	Aldrin	0.004	0.004	ug/L
EPA 8081B	Water	alpha-BHC	0.004	0.004	ug/L
EPA 8081B	Water	beta-BHC	0.004	0.004	ug/L
EPA 8081B	Water	delta-BHC	0.004	0.004	ug/L
EPA 8081B	Water	gamma-BHC (Lindane)	0.004	0.004	ug/L
EPA 8081B	Water	gamma-Chlordane	0.01	0.01	ug/L
EPA 8081B	Water	alpha-Chlordane	0.004	0.004	ug/L
EPA 8081B	Water	Chlordane, total	0.04	0.04	ug/L
EPA 8081B	Water	4,4'-DDD	0.004	0.004	ug/L
EPA 8081B	Water	4,4'-DDE	0.004	0.004	ug/L
EPA 8081B	Water	4,4'-DDT	0.004	0.004	ug/L
EPA 8081B	Water	Dieldrin	0.002	0.002	ug/L
EPA 8081B	Water	Endosulfan I	0.004	0.004	ug/L
EPA 8081B	Water	Endosulfan II	0.004	0.004	ug/L
EPA 8081B	Water	Endosulfan sulfate	0.004	0.004	ug/L
EPA 8081B	Water	Endrin	0.004	0.004	ug/L
EPA 8081B	Water	Endrin aldehyde	0.01	0.01	ug/L
EPA 8081B	Water	Endrin ketone	0.01	0.01	ug/L
EPA 8081B	Water	Heptachlor	0.004	0.004	ug/L
EPA 8081B	Water	Heptachlor epoxide	0.004	0.004	ug/L
EPA 8081B	Water	Methoxychlor	0.004	0.004	ug/L
EPA 8081B	Water	Toxaphene	0.1	0.1	ug/L

Method	Matrix	Analyte	MDL	RL	Units
PCBs					
EPA 8082A	Water	Aroclor 1016	0.05	0.05	ug/L
EPA 8082A	Water	Aroclor 1221	0.05	0.05	ug/L
EPA 8082A	Water	Aroclor 1232	0.05	0.05	ug/L
EPA 8082A	Water	Aroclor 1242	0.05	0.05	ug/L
EPA 8082A	Water	Aroclor 1248	0.05	0.05	ug/L
EPA 8082A	Water	Aroclor 1254	0.05	0.05	ug/L
EPA 8082A	Water	Aroclor 1260	0.05	0.05	ug/L
EPA 8082A	Water	Aroclor 1262	0.05	0.05	ug/L
EPA 8082A	Water	Aroclor 1268	0.05	0.05	ug/L
EPA 8082A	Water	Total PCBs	0.05	0.05	ug/L

Method	Matrix	Analyte	MDL	RL	Units
Herbicides					
EPA 8151A	Water	2,4-D	5	5	ug/L
EPA 8151A	Water	2,4,5-TP (Silvex)	5	5	ug/L
EPA 8151A	Water	2,4,5-T	5	5	ug/L

APPENDIX B
LABORATORY REPORTING LIMITS AND METHOD DETECTION LIMITS

Method	Matrix	Analyte	MDL	RL	Units
Metals					
EPA 6010C	Water	Aluminum	0.01	0.01	mg/L
EPA 6010C	Water	Antimony	0.005	0.005	mg/L
EPA 6010C	Water	Arsenic	0.004	0.004	mg/L
EPA 6010C	Water	Barium	0.01	0.01	mg/L
EPA 6010C	Water	Beryllium	0.001	0.001	mg/L
EPA 6010C	Water	Cadmium	0.003	0.003	mg/L
EPA 6010C	Water	Calcium	0.05	0.05	mg/L
EPA 6010C	Water	Chromium	0.005	0.005	mg/L
EPA 6010C	Water	Cobalt	0.005	0.005	mg/L
EPA 6010C	Water	Copper	0.003	0.003	mg/L
EPA 6010C	Water	Iron	0.02	0.02	mg/L
EPA 6010C	Water	Lead	0.003	0.003	mg/L
EPA 6010C	Water	Magnesium	0.05	0.05	mg/L
EPA 6010C	Water	Manganese	0.005	0.005	mg/L
EPA 7473	Water	Mercury	0.002	0.002	mg/L
EPA 6010C	Water	Nickel	0.005	0.005	mg/L
EPA 6010C	Water	Potassium	0.05	0.05	mg/L
EPA 6010C	Water	Selenium	0.01	0.01	mg/L
EPA 6010C	Water	Silver	0.005	0.005	mg/L
EPA 6010C	Water	Sodium	0.1	0.1	mg/L
EPA 6010C	Water	Thallium	0.005	0.005	mg/L
EPA 6010C	Water	Vanadium	0.01	0.01	mg/L
EPA 6010C	Water	Zinc	0.01	0.01	mg/L

APPENDIX B
LABORATORY REPORTING LIMITS AND METHOD DETECTION LIMITS

Method	Matrix	Analyte	MDL	RL	Units
VOC					
EPA 8260C	Soil	1,1,1,2-Tetrachloroethane	2.5	5	ug/kg
EPA 8260C	Soil	1,1,1-Trichloroethane	2.5	5	ug/kg
EPA 8260C	Soil	1,1,2,2-Tetrachloroethane	2.5	5	ug/kg
EPA 8260C	Soil	1,1,2-Trichloro-1,2,2-trifluoroethane (Freon 113)	2.5	5	ug/kg
EPA 8260C	Soil	1,1,2-Trichloroethane	2.5	5	ug/kg
EPA 8260C	Soil	1,1-Dichloroethane	2.5	5	ug/kg
EPA 8260C	Soil	1,1-Dichloroethylene	2.5	5	ug/kg
EPA 8260C	Soil	Bromochloromethane	2.5	5	ug/kg
EPA 8260C	Soil	1,2,3-Trichloropropane	2.5	5	ug/kg
EPA 8260C	Soil	1,2,4-Trichlorobenzene	2.5	5	ug/kg
EPA 8260C	Soil	1,2,4-Trimethylbenzene	2.5	5	ug/kg
EPA 8260C	Soil	1,2-Dibromo-3-chloropropane	2.5	5	ug/kg
EPA 8260C	Soil	1,2-Dibromoethane	2.5	5	ug/kg
EPA 8260C	Soil	1,2-Dichlorobenzene	2.5	5	ug/kg
EPA 8260C	Soil	1,2-Dichloroethane	2.5	5	ug/kg
EPA 8260C	Soil	1,2-Dichloropropane	2.5	5	ug/kg
EPA 8260C	Soil	1,3,5-Trimethylbenzene	2.5	5	ug/kg
EPA 8260C	Soil	1,3-Dichlorobenzene	2.5	5	ug/kg
EPA 8260C	Soil	1,4-Dichlorobenzene	2.5	5	ug/kg
EPA 8260C	Soil	1,4-Dioxane	50	100	ug/kg
EPA 8260C	Soil	Cyclohexane	2.5	5	ug/kg
EPA 8260C	Soil	2-Butanone	2.5	5	ug/kg
EPA 8260C	Soil	2-Hexanone	2.5	5	ug/kg
EPA 8260C	Soil	4-Methyl-2-pentanone	2.5	5	ug/kg
EPA 8260C	Soil	Acetone	5	10	ug/kg
EPA 8260C	Soil	Acrolein	5	10	ug/kg
EPA 8260C	Soil	Acrylonitrile	2.5	5	ug/kg
EPA 8260C	Soil	Benzene	2.5	5	ug/kg
EPA 8260C	Soil	Bromodichloromethane	2.5	5	ug/kg
Method	Matrix	Analyte	MDL	RL	Units
VOC					
EPA 8260C	Soil	Bromoform	2.5	5	ug/kg
EPA 8260C	Soil	Bromomethane	2.5	5	ug/kg
EPA 8260C	Soil	Carbon disulfide	2.5	5	ug/kg
EPA 8260C	Soil	Carbon tetrachloride	2.5	5	ug/kg
EPA 8260C	Soil	Chlorobenzene	2.5	5	ug/kg
EPA 8260C	Soil	Chloroethane	2.5	5	ug/kg
EPA 8260C	Soil	Chloroform	2.5	5	ug/kg
EPA 8260C	Soil	Chloromethane	2.5	5	ug/kg
EPA 8260C	Soil	cis-1,2-Dichloroethylene	2.5	5	ug/kg
EPA 8260C	Soil	cis-1,3-Dichloropropylene	2.5	5	ug/kg
EPA 8260C	Soil	Dibromochloromethane	2.5	5	ug/kg
EPA 8260C	Soil	Dibromomethane	2.5	5	ug/kg
EPA 8260C	Soil	Dichlorodifluoromethane	2.5	5	ug/kg
EPA 8260C	Soil	Naphthalene	2.5	10	ug/kg
EPA 8260C	Soil	Ethyl Benzene	2.5	5	ug/kg
EPA 8260C	Soil	Methylcyclohexane	2.5	5	ug/kg
EPA 8260C	Soil	Hexachlorobutadiene	2.5	5	ug/kg
EPA 8260C	Soil	Isopropylbenzene	2.5	5	ug/kg
EPA 8260C	Soil	Methyl acetate	2.5	5	ug/kg
EPA 8260C	Soil	Methyl tert-butyl ether (MTBE)	2.5	5	ug/kg
EPA 8260C	Soil	Methylene chloride	5	10	ug/kg
EPA 8260C	Soil	n-Butylbenzene	2.5	5	ug/kg
EPA 8260C	Soil	n-Propylbenzene	2.5	5	ug/kg
EPA 8260C	Soil	1,2,3-Trichlorobenzene	2.5	5	ug/kg
EPA 8260C	Soil	o-Xylene	2.5	5	ug/kg
EPA 8260C	Soil	p- & m- Xylenes	5	10	ug/kg
EPA 8260C	Soil	p-Isopropyltoluene	2.5	5	ug/kg
EPA 8260C	Soil	sec-Butylbenzene	2.5	5	ug/kg
EPA 8260C	Soil	Styrene	2.5	5	ug/kg
EPA 8260C	Soil	tert-Butyl alcohol (TBA)	2.5	5	ug/kg

APPENDIX B
LABORATORY REPORTING LIMITS AND METHOD DETECTION LIMITS

Method	Matrix	Analyte	MDL	RL	Units
VOC					
EPA 8260C	Soil	tert-Butylbenzene	2.5	5	ug/kg
EPA 8260C	Soil	Tetrachloroethylene	2.5	5	ug/kg
EPA 8260C	Soil	Toluene	2.5	5	ug/kg
EPA 8260C	Soil	trans-1,2-Dichloroethylene	2.5	5	ug/kg
EPA 8260C	Soil	trans-1,3-Dichloropropylene	2.5	5	ug/kg
EPA 8260C	Soil	Trichloroethylene	2.5	5	ug/kg
EPA 8260C	Soil	Trichlorofluoromethane	2.5	5	ug/kg
EPA 8260C	Soil	Vinyl Chloride	2.5	5	ug/kg
EPA 8260C	Soil	Xylenes, Total	7.5	15	ug/kg

Method	Matrix	Analyte	MDL	RL	Units
SVOC					
EPA 8270D	Soil	Acenaphthene	20.9	41.7	ug/kg
EPA 8270D	Soil	Acenaphthylene	20.9	41.7	ug/kg
EPA 8270D	Soil	Acetophenone	20.9	41.7	ug/kg
EPA 8270D	Soil	Aniline	83.5	167	ug/kg
EPA 8270D	Soil	Anthracene	20.9	41.7	ug/kg
EPA 8270D	Soil	Atrazine	20.9	41.7	ug/kg
EPA 8270D	Soil	Benzaldehyde	20.9	41.7	ug/kg
EPA 8270D	Soil	Benzidine	83.5	167	ug/kg
EPA 8270D	Soil	Benzo(a)anthracene	20.9	41.7	ug/kg
EPA 8270D	Soil	Benzo(a)pyrene	20.9	41.7	ug/kg
EPA 8270D	Soil	Benzo(b)fluoranthene	20.9	41.7	ug/kg
EPA 8270D	Soil	Benzo(g,h,i)perylene	20.9	41.7	ug/kg
EPA 8270D	Soil	Benzoic acid	20.9	41.7	ug/kg
EPA 8270D	Soil	Benzo(k)fluoranthene	20.9	41.7	ug/kg
EPA 8270D	Soil	Benzyl alcohol	20.9	41.7	ug/kg
EPA 8270D	Soil	Benzyl butyl phthalate	20.9	41.7	ug/kg
EPA 8270D	Soil	1,1'-Biphenyl	20.9	41.7	ug/kg
EPA 8270D	Soil	4-Bromophenyl phenyl ether	20.9	41.7	ug/kg
EPA 8270D	Soil	Caprolactam	41.7	83.3	ug/kg
EPA 8270D	Soil	Carbazole	20.9	41.7	ug/kg
EPA 8270D	Soil	4-Chloro-3-methylphenol	20.9	41.7	ug/kg
EPA 8270D	Soil	4-Chloroaniline	20.9	41.7	ug/kg
EPA 8270D	Soil	Bis(2-chloroethoxy)methane	20.9	41.7	ug/kg
EPA 8270D	Soil	Bis(2-chloroethyl)ether	20.9	41.7	ug/kg
EPA 8270D	Soil	Bis(2-chloroisopropyl)ether	20.9	41.7	ug/kg
EPA 8270D	Soil	2-Chloronaphthalene	20.9	41.7	ug/kg
EPA 8270D	Soil	2-Chlorophenol	20.9	41.7	ug/kg
EPA 8270D	Soil	4-Chlorophenyl phenyl ether	20.9	41.7	ug/kg
EPA 8270D	Soil	Chrysene	20.9	41.7	ug/kg

Method	Matrix	Analyte	MDL	RL	Units
SVOC					
EPA 8270D	Soil	Dibenzo(a,h)anthracene	20.9	41.7	ug/kg
EPA 8270D	Soil	Dibenzofuran	20.9	41.7	ug/kg
EPA 8270D	Soil	Di-n-butyl phthalate	20.9	41.7	ug/kg
EPA 8270D	Soil	1,2-Dichlorobenzene	20.9	41.7	ug/kg
EPA 8270D	Soil	1,3-Dichlorobenzene	20.9	41.7	ug/kg
EPA 8270D	Soil	1,4-Dichlorobenzene	20.9	41.7	ug/kg
EPA 8270D	Soil	3,3'-Dichlorobenzidine	20.9	41.7	ug/kg
EPA 8270D	Soil	2,4-Dichlorophenol	20.9	41.7	ug/kg
EPA 8270D	Soil	Diethyl phthalate	20.9	41.7	ug/kg
EPA 8270D	Soil	2,4-Dimethylphenol	20.9	41.7	ug/kg
EPA 8270D	Soil	Dimethyl phthalate	20.9	41.7	ug/kg
EPA 8270D	Soil	4,6-Dinitro-2-methylphenol	41.7	83.3	ug/kg
EPA 8270D	Soil	2,4-Dinitrophenol	41.7	83.3	ug/kg
EPA 8270D	Soil	2,4-Dinitrotoluene	20.9	41.7	ug/kg
EPA 8270D	Soil	2,6-Dinitrotoluene	20.9	41.7	ug/kg
EPA 8270D	Soil	Di-n-octyl phthalate	20.9	41.7	ug/kg
EPA 8270D	Soil	1,2-Diphenylhydrazine (as Azobenzene)	20.9	41.7	ug/kg
EPA 8270D	Soil	Bis(2-ethylhexyl)phthalate	20.9	41.7	ug/kg
EPA 8270D	Soil	Fluoranthene	20.9	41.7	ug/kg
EPA 8270D	Soil	Fluorene	20.9	41.7	ug/kg
EPA 8270D	Soil	Hexachlorobenzene	20.9	41.7	ug/kg
EPA 8270D	Soil	Hexachlorobutadiene	20.9	41.7	ug/kg
EPA 8270D	Soil	Hexachlorocyclopentadiene	20.9	41.7	ug/kg
EPA 8270D	Soil	Hexachloroethane	20.9	41.7	ug/kg
EPA 8270D	Soil	Indeno(1,2,3-cd)pyrene	20.9	41.7	ug/kg
EPA 8270D	Soil	Isophorone	20.9	41.7	ug/kg
EPA 8270D	Soil	2-Methylnaphthalene	20.9	41.7	ug/kg
EPA 8270D	Soil	2-Methylphenol	20.9	41.7	ug/kg
EPA 8270D	Soil	3- & 4-Methylphenols	20.9	41.7	ug/kg

**APPENDIX B
LABORATORY REPORTING LIMITS AND METHOD DETECTION LIMITS**

SVOC					
EPA 8270D	Soil	Naphthalene	20.9	41.7	ug/kg
EPA 8270D	Soil	4-Nitroaniline	41.7	83.3	ug/kg
EPA 8270D	Soil	2-Nitroaniline	41.7	83.3	ug/kg
EPA 8270D	Soil	3-Nitroaniline	41.7	83.3	ug/kg
EPA 8270D	Soil	Nitrobenzene	20.9	41.7	ug/kg
EPA 8270D	Soil	2-Nitrophenol	20.9	41.7	ug/kg
EPA 8270D	Soil	4-Nitrophenol	41.7	83.3	ug/kg
EPA 8270D	Soil	N-nitroso-di-n-propylamine	20.9	41.7	ug/kg
EPA 8270D	Soil	N-Nitrosodimethylamine	20.9	41.7	ug/kg
EPA 8270D	Soil	N-Nitrosodiphenylamine	20.9	41.7	ug/kg
EPA 8270D	Soil	Pentachlorophenol	20.9	41.7	ug/kg
EPA 8270D	Soil	Phenanthrene	20.9	41.7	ug/kg
EPA 8270D	Soil	Phenol	20.9	41.7	ug/kg
EPA 8270D	Soil	Pyrene	20.9	41.7	ug/kg
EPA 8270D	Soil	Pyridine	83.5	167	ug/kg
EPA 8270D	Soil	1,2,4,5-Tetrachlorobenzene	41.7	83.3	ug/kg
EPA 8270D	Soil	2,3,4,6-Tetrachlorophenol	41.7	83.3	ug/kg
EPA 8270D	Soil	1,2,4-Trichlorobenzene	20.9	41.7	ug/kg
EPA 8270D	Soil	2,4,6-Trichlorophenol	20.9	41.7	ug/kg
EPA 8270D	Soil	2,4,5-Trichlorophenol	20.9	41.7	ug/kg

Method	Matrix	Analyte	MDL	RL	Units
Pesticides					
EPA 8081B	Soil	Aldrin	0.33	0.33	ug/kg
EPA 8081B	Soil	alpha-BHC	0.33	0.33	ug/kg
EPA 8081B	Soil	beta-BHC	0.33	0.33	ug/kg
EPA 8081B	Soil	delta-BHC	0.33	0.33	ug/kg
EPA 8081B	Soil	gamma-BHC (Lindane)	0.33	0.33	ug/kg
EPA 8081B	Soil	gamma-Chlordane	0.33	0.33	ug/kg
EPA 8081B	Soil	alpha-Chlordane	0.33	0.33	ug/kg
EPA 8081B	Soil	Chlordane, total	1.32	1.32	ug/kg
EPA 8081B	Soil	4,4'-DDD	0.33	0.33	ug/kg
EPA 8081B	Soil	4,4'-DDE	0.33	0.33	ug/kg
EPA 8081B	Soil	4,4'-DDT	0.33	0.33	ug/kg
EPA 8081B	Soil	Dieldrin	0.33	0.33	ug/kg
EPA 8081B	Soil	Endosulfan I	0.33	0.33	ug/kg
EPA 8081B	Soil	Endosulfan II	0.33	0.33	ug/kg
EPA 8081B	Soil	Endosulfan sulfate	0.33	0.33	ug/kg
EPA 8081B	Soil	Endrin	0.33	0.33	ug/kg
EPA 8081B	Soil	Endrin aldehyde	0.33	0.33	ug/kg
EPA 8081B	Soil	Endrin ketone	0.33	0.33	ug/kg
EPA 8081B	Soil	Heptachlor	0.33	0.33	ug/kg
EPA 8081B	Soil	Heptachlor epoxide	0.33	0.33	ug/kg
EPA 8081B	Soil	Methoxychlor	1.65	1.65	ug/kg
EPA 8081B	Soil	Toxaphene	16.7	16.7	ug/kg

APPENDIX B
LABORATORY REPORTING LIMITS AND METHOD DETECTION LIMITS

Method	Matrix	Analyte	MDL	RL	Units
PCBs					
EPA 8082A	Soil	Aroclor 1016	0.0167	0.0167	mg/kg
EPA 8082A	Soil	Aroclor 1221	0.0167	0.0167	mg/kg
EPA 8082A	Soil	Aroclor 1232	0.0167	0.0167	mg/kg
EPA 8082A	Soil	Aroclor 1242	0.0167	0.0167	mg/kg
EPA 8082A	Soil	Aroclor 1248	0.0167	0.0167	mg/kg
EPA 8082A	Soil	Aroclor 1254	0.0167	0.0167	mg/kg
EPA 8082A	Soil	Aroclor 1260	0.0167	0.0167	mg/kg
EPA 8082A	Soil	Aroclor 1262	0.0167	0.0167	mg/kg
EPA 8082A	Soil	Aroclor 1268	0.0167	0.0167	mg/kg
EPA 8082A	Soil	Total PCBs	0.0167	0.0167	mg/kg

Method	Matrix	Analyte	MDL	RL	Units
Herbicides					
EPA 8151A m	Soil	2,4-D	20	20	ug/kg
EPA 8151A m	Soil	2,4,5-TP (Silvex)	20	20	ug/kg
EPA 8151A m	Soil	2,4,5-T	20	20	ug/kg

Method	Matrix	Analyte	MDL	RL	Units
Metals					
EPA 6010C	Soil	Aluminum	1	1	mg/kg
EPA 6010C	Soil	Antimony	0.5	0.5	mg/kg
EPA 6010C	Soil	Arsenic	1	1	mg/kg
EPA 6010C	Soil	Barium	1	1	mg/kg
EPA 6010C	Soil	Beryllium	0.1	0.1	mg/kg
EPA 6010C	Soil	Cadmium	0.3	0.3	mg/kg
EPA 6010C	Soil	Calcium	0.5	5	mg/kg
EPA 6010C	Soil	Chromium	0.5	0.5	mg/kg
EPA 6010C	Soil	Cobalt	0.5	0.5	mg/kg
EPA 6010C	Soil	Copper	0.5	0.5	mg/kg
EPA 6010C	Soil	Iron	2	2	mg/kg
EPA 6010C	Soil	Lead	0.3	0.3	mg/kg
EPA 6010C	Soil	Magnesium	5	5	mg/kg
EPA 6010C	Soil	Manganese	0.5	0.5	mg/kg
EPA 7473	Soil	Mercury	0.03	0.03	mg/kg
EPA 6010C	Soil	Nickel	0.5	0.5	mg/kg
EPA 6010C	Soil	Potassium	5	5	mg/kg
EPA 6010C	Soil	Selenium	1	1	mg/kg
EPA 6010C	Soil	Silver	0.5	0.5	mg/kg
EPA 6010C	Soil	Sodium	10	10	mg/kg
EPA 6010C	Soil	Thallium	1	1	mg/kg
EPA 6010C	Soil	Vanadium	1	1	mg/kg
EPA 6010C	Soil	Zinc	1	1	mg/kg

ATTACHMENT B
LABORATORY REPORTING LIMITS AND METHOD DETECTION LIMITS

SOIL VAPOR ANALYTE	CASNUMBER	RL	UNITS
1,1,1-Trichloroethane	71-55-6	0.55	ug/m ³
1,1,2,2-Tetrachloroethane	79-34-5	0.69	ug/m ³
1,1,2-Trichloro-1,2,2-trifluoroethane (Freon 113)	76-13-1	0.77	ug/m ³
1,1,2-Trichloroethane	79-00-5	0.55	ug/m ³
1,1-Dichloroethane	75-34-3	0.40	ug/m ³
1,1-Dichloroethylene	75-35-4	0.40	ug/m ³
1,2,4-Trichlorobenzene	120-82-1	0.74	ug/m ³
1,2,4-Trimethylbenzene	95-63-6	0.49	ug/m ³
1,2-Dibromoethane	106-93-4	0.77	ug/m ³
1,2-Dichlorobenzene	95-50-1	0.60	ug/m ³
1,2-Dichloroethane	107-06-2	0.40	ug/m ³
1,2-Dichloropropane	78-87-5	0.46	ug/m ³
1,2-Dichlorotetrafluoroethane	76-14-2	0.70	ug/m ³
1,3,5-Trimethylbenzene	108-67-8	0.49	ug/m ³
1,3-Butadiene	106-99-0	0.43	ug/m ³
1,3-Dichlorobenzene	541-73-1	0.60	ug/m ³
1,4-Dichlorobenzene	106-46-7	0.60	ug/m ³
1,4-Dioxane	123-91-1	0.36	ug/m ³
2-Butanone	78-93-3	0.29	ug/m ³
2-Hexanone	591-78-6	0.82	ug/m ³
4-Methyl-2-pentanone	108-10-1	0.41	ug/m ³
Acetone	67-64-1	0.24	ug/m ³
Benzene	71-43-2	0.32	ug/m ³
Benzyl chloride	100-44-7	0.52	ug/m ³
Bromodichloromethane	75-27-4	0.62	ug/m ³
Bromoform	75-25-2	1.0	ug/m ³
Bromomethane	74-83-9	0.39	ug/m ³
Carbon disulfide	75-15-0	0.31	ug/m ³
Carbon tetrachloride	56-23-5	0.16	ug/m ³
Chlorobenzene	108-90-7	0.46	ug/m ³
Chloroethane	75-00-3	0.26	ug/m ³
Chloroform	67-66-3	0.49	ug/m ³
Chloromethane	74-87-3	0.21	ug/m ³
cis-1,2-Dichloroethylene	156-59-2	0.40	ug/m ³
cis-1,3-Dichloropropylene	10061-01-5	0.45	ug/m ³
Cyclohexane	110-82-7	0.34	ug/m ³
Dibromochloromethane	124-48-1	0.80	ug/m ³
Dichlorodifluoromethane	75-71-8	0.49	ug/m ³
Ethyl acetate	141-78-6	0.72	ug/m ³
Ethyl Benzene	100-41-4	0.43	ug/m ³
Hexachlorobutadiene	87-68-3	1.1	ug/m ³
Isopropanol	67-63-0	0.49	ug/m ³
Methyl Methacrylate	80-62-6	0.41	ug/m ³
Methyl tert-butyl ether (MTBE)	1634-04-4	0.36	ug/m ³
Methylene chloride	75-09-2	0.69	ug/m ³
n-Heptane	142-82-5	0.41	ug/m ³
n-Hexane	110-54-3	0.35	ug/m ³
o-Xylene	95-47-6	0.43	ug/m ³
p- & m- Xylenes	179601-23-1	0.87	ug/m ³
p-Ethyltoluene	622-96-8	0.49	ug/m ³
Propylene	115-07-1	0.17	ug/m ³
Styrene	100-42-5	0.43	ug/m ³
Tetrachloroethylene	127-18-4	0.17	ug/m ³
Tetrahydrofuran	109-99-9	0.29	ug/m ³
Toluene	108-88-3	0.38	ug/m ³
trans-1,2-Dichloroethylene	156-60-5	0.40	ug/m ³
trans-1,3-Dichloropropylene	10061-02-6	0.45	ug/m ³
Trichloroethylene	79-01-6	0.13	ug/m ³
Trichlorofluoromethane (Freon 11)	75-69-4	0.56	ug/m ³
Vinyl acetate	108-05-4	0.35	ug/m ³
Vinyl Chloride	75-01-4	0.064	ug/m ³

Attachment C

Analytical Methods/Quality Assurance Summary Table

**ATTACHMENT C
ANALYTICAL METHODS/QUALITY ASSURANCE SUMMARY TABLE**

Matrix Type	Field Parameters	Laboratory Parameters	Analytical Methods	Sample Preservation	Sample Container Volume and Type	Sample Hold Time	Field Duplicate Samples	Equipment Blank Samples	Trip Blank Samples	Ambient Air Samples	MS/MSD Samples
Groundwater	Temperature, Turbidity, pH, ORP, Conductivity	Part 375 + TCL VOCs	EPA 8260C	Cool to 4°C; HCl to pH <2;no headspace	Three 40-mL VOC vials with Teflon®-lined cap	Analyze within 14 days of collection	1 per 20 samples (minimum 1)	1 per 20 samples (minimum 1)	1 per shipment of VOC samples	NA	1 per 20 samples
		Part 375 + TCL SVOCs	EPA 8270D	Cool to 4°C	Two 1-Liter Amber Glass	7 days to extract, 40 days after extraction to analysis					
		Part 375 + TAL Metals	EPA 6010C, EPA 7470	HNO ₃	250 ml plastic	6 months, except Mercury 28 days					
		Hexavalent Chromium	EPA 7196A	Cool to 4°C	250 ml plastic	24 hours					
		Cyanide	SM 4500 C/E	NaOH plus 0.6g ascorbic acid	250 ml plastic	14 days					
		Part 375 + TCL Pesticides	EPA 8081B	Cool to 4°C	Two 1-Liter Amber for Pesticides/PCB	7 days to extract, 40 days after extraction to analysis					
		PCBs	EPA 8082A	Cool to 4°C		7 days to extract, 40 days after extraction to analysis					
Soil	Total VOCs via PID	Part 375 + TCL VOCs	EPA 8260C	Cool to 4°C	Two 40-ml VOC vials with 5ml H ₂ O, one with MeOH or 3 Encore Samplers (separate container for % solids)	14 days	1 per 20 samples (minimum 1)	1 per 20 samples (minimum 1)	1 per shipment of VOC samples	NA	1 per 20 samples
		Part 375 + TCL SVOCs	EPA 8270D	Cool to 4°C	4 oz. jar*	14 days extract, 40 days after extraction to analysis					
		Part 375 + TAL Metals	EPA 6010C, EPA 7470, EPA 7196A, EPA 9014/9010C	Cool to 4°C	2 oz. jar*	6 months, except Mercury 28 days					
		Part 375 + TCL Pesticides	EPA 8081B	Cool to 4°C	4 oz. jar*	14 days extract, 40 days after extraction to analysis					
		Part 375 + TCL PCBs	EPA 8082A	Cool to 4°C	4 oz. jar*	14 days extract, 40 days after extraction to analysis					
Soil Gas	Total VOCs via PID	TO-15 Listed VOCs	TO-15	Ambient Temperature	6-Liter Summa Canister	Analyze within 30 days of collection	1 per 20 samples (minimum 1)	1 per 20 samples (minimum 1)	NA	1 per 10 samples	NA
Indoor Air	Total VOCs via PID	TO-15 Listed VOCs	TO-15	Ambient Temperature	6-Liter Summa Canister	Analyze within 30 days of collection	1 per 20 samples (minimum 1)	1 per 20 samples (minimum 1)	NA	1 per 10 samples	NA

Notes:

*can be combined in one or more 8 oz. jars

Attachment D
Sample Nomenclature

SAMPLE NOMENCLATURE

The sample nomenclature outlined below provides consistency between sample events and projects but, most importantly, establish unique sample IDs that will avoid confusion months or years after the sample has been collected. Furthermore, unique sample IDs are required for any data submitted to the NYSDEC in EDD format or being uploaded to an EQiS database.


1.0 INVESTIGATION LOCATION CODES

SB	Soil Boring	SV	Soil Vapor Point
WC	Waste Characterization Boring	IA	Indoor Air
TP	Test Pit	AA	Ambient Air
EPSW	Endpoint Location (Sidewall)	SVE	Vapor Extraction Well
EPB	Endpoint Location (Bottom)	DS	Drum
MW	Monitoring Well	IDW	Investigation Derived Waste
TMW	Temporary Monitoring Well	SL	Sludge
SW	Surface Water	FP	Free Product

2.0 SAMPLE NOMENCLATURE

Each sample at a site must have a unique value.

- Soil/Sediment Samples:**

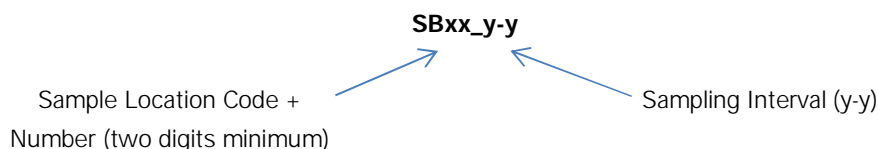


Sample Type	Sample Location Code	Sampling Depth or Interval (feet bgs or approx. elevation)	Sample Name
Phase II/Remedial Investigation			
Grab Soil Sample	SB01	2 to 4	SB01_2-4
	SB02	4	SB02_4
Waste Characterization			
Grab Soil Sample	WC01	2 to 4	WC01_2-4
	WC02	4	WC02_4
Composite Soil Sample from one or more locations	COMP01 or COMP02 + COMP03	0 to 10 (Fill)	COMP01_0-10

LANGAN


Sample Type	Sample Location Code	Sampling Depth or Interval (feet bgs or approx. elevation)	Sample Name
Endpoint Sampling			
Grab Soil Sample	EPSW01_N	5	EPSW01_N_5
	EPSW01_S	5	EPSW01_S_5
	EPSW01_E	5	EPSW01_E_5
	EPSW01_W	5	EPSW01_W_5
	EPB01	6	EPB01_6

- Groundwater/Surface Water Samples:**

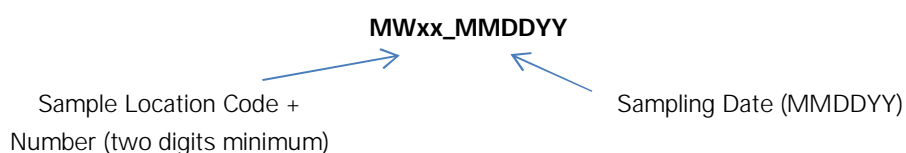

Sample Type	Sample Location Code	Sampling Date	Sample Name
Groundwater Sample	MW01	02/21/2013	MW01_022113

- Air/Soil Vapor Samples:**

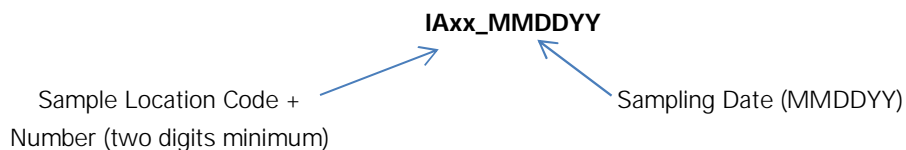

Sample Type	Sample Location Code	Date	Sample Name
Air Sample	IA01	02/21/2013	IA01_022113
Soil Vapor Sample	SV01	02/21/2013	SV01_022113
Vapor Extraction Well Sample	SVE01 (INLET/MIDPOINT/OUTLET)	02/21/2013	SVE01_IN_022113 SVE01_MID_022113 SVE01_OUT_022113


- QA/QC Samples:**

Sample Matrix Codes

SO	Soil	AS	Air
SE	Sediment	SV	Soil Vapor
GW	Groundwater	SL	Sludge
SW	Surface Water	FP	Free Product


LANGAN

- o Duplicates Samples

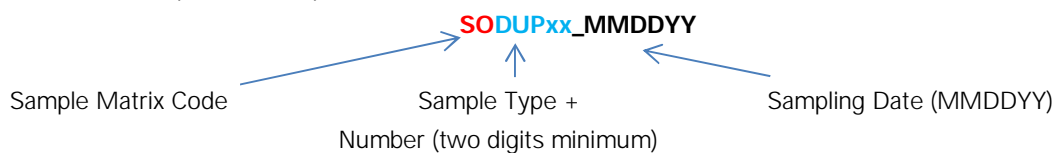

Sample Type	Parent Sample Code	Date	Sample Name
Groundwater Duplicate Sample (DUP)	MW01_022113	02/21/2013	GWDUP01_022113
Soil boring Duplicate Sample (DUP)	SBP01_022113	02/21/2013	SODUP01_022113
Grab Waste Characterization	WC01	02/21/2013	WCDUP01_022113
Composite Waste Characterization	COMP01	02/21/2013	COMPDUP01_022113

- o Field Blanks and Trip Blanks

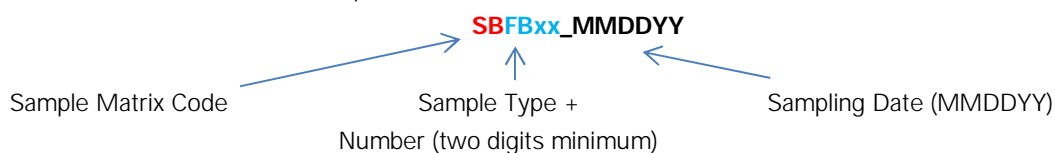

Sample Type	Date	Sample Name
Groundwater Field Blank (FB)	02/21/2013	GWFB01_022113
Groundwater Trip Blank (TB)	02/21/2013	GWTB01_022113
Soil Field Blank	02/21/2013	SOFB01_022113
Soil Trip Blank	02/21/2013	SOTB01_022113

- o Matrix Spike/Matrix Spike Duplicate (MS/MSD)

Parent Sample Name_MS or MSD

Sample Type	Sample Location	Parent Sample Name	Sample Name
Matrix Spike Soil (MS)	SB01	SB01_2-4	SB01_2-4_MS
Matrix Spike Soil Duplicate (MSD)	SB01	SB01_2-4	SB01_2-4_MSD
Matrix Spike GW (MS)	MW01	MW01	MW01_MS
Matrix Spike GW Duplicate (MSD)	MW01	MW01	MW01_MSD

3.0 NOTES

1. The sample location code should not exceed 20 characters and the sample name should not exceed 40 characters.
2. Sample location code (**SB01, MW01, etc.**) is a sequential number (starting with 01) and should be a minimum of two digits.
3. Sample Interval (**SB01_0-5**) is separated from the sample location code with an underscore, and the top and bottom interval with a dash. Soil and sediment sample intervals should always be in

LANGAN

- feet. Soil and sediment sample intervals should contain no "/" or "()" or unit.
4. Sample date (MW01_022113) is separated from the sample location code with an underscore and should be provided in MMDDYY format [the date should contain no "/" or "-"].
 5. If groundwater samples are collected from multiple intervals within one well, you may assign a letter designation (in lower case) to the well ID to differentiate between intervals (i.e., MW01a_022113, MW01b_022113, and MW01c_022113). The letter "a" would indicate the shallowest interval and "c" the deepest. The actual depth intervals should be documented in the project field book or field sheets and the letter designations should be used consistently between sampling events.
 6. According to USEPA's Contract Laboratory Program (CLP) Guidance for Field Samplers (January 2011), field duplicate samples should remain "blind" to the laboratory (i.e., they should have separate CLP Sample numbers). Assign two separate (unique) CLP sample numbers (i.e., one number to the field sample and one to the duplicate). Submit blind to the laboratory. (<http://www.epa.gov/superfund/programs/clp/download/sampler/CLPSamp-01-2011.pdf>)