

ATLANTIC CHESTNUT – LOT 3

**275 CHESTNUT STREET
BROOKLYN, NEW YORK**

Interim Remedial Measure Work Plan

**NYSDEC BCP Site Number: C224236
AKRF Project Number: 12184**

Prepared For:

NYSDEC Region 2
1 Hunter's Point Plaza
47-40 21st Street
Long Island City, New York 11101

Prepared On Behalf Of:

Atlantic Chestnut Affordable Housing LLC
902 Broadway, 13th Floor
New York, New York 10010

Prepared by:



AKRF, Inc.
440 Park Avenue South, 7th Floor
New York, New York 10016
212-696-0670

AUGUST 2018

TABLE OF CONTENTS

1.0	INTRODUCTION	1
2.0	SITE DESCRIPTION AND HISTORY	2
2.1	Site Description and Surrounding Land Use	2
2.2	Site Geology, Hydrogeology, and Subsurface Characteristics	2
2.3	Site History and Previous Owners	2
2.4	Proposed Development.....	2
2.5	Proposed Project Schedule	3
3.0	PREVIOUS ENVIRONMENTAL REPORTS	4
4.0	NATURE AND EXTENT OF CONTAMINATION	9
4.1	Conceptual Model of Site Contamination	9
4.2	Contaminated Media.....	9
4.3	Qualitative Human Health Exposure Assessment (QHHEA).....	10
5.0	INTERIM REMEDIAL MEASURE (IRM): SOIL VAPOR EXTRACTION (SVE) SYSTEM .	11
5.1	Treatment Area.....	11
5.2	SVE Pilot Test	11
5.2.1	Pilot Test SVE Well Installation	11
5.2.2	Vapor Monitoring Point (VMP) Installation.....	11
5.2.3	Baseline Monitoring.....	12
5.2.4	Blower Calibration	12
5.2.5	Pilot Test Implementation	12
5.2.5.1.	Pilot Test SVE Well Communication Testing	13
5.2.5.3	Vapor Sampling	14
5.3	Full-Scale Soil Vapor Extraction Well Installation	14
5.3.1	SVE Well Installation	14
5.4	System Location and Components	14
5.5	Soil Vapor Extraction (SVE) Well Location Survey.....	16
5.6	Decontamination Procedures	16
5.7	Management of Investigation-Derived Waste (IDW)	16
6.0	REPORTING REQUIREMENTS	17
6.1	Interim Remedial Measure Report (IRMR).....	17
6.2	System Operation, Maintenance, and Monitoring (OM&M) Plan	17
7.0	SCHEDULE.....	18
8.0	CERTIFICATION	20

FIGURES

- Figure 1 – Brownfield Cleanup Program Site Location
- Figure 2 – Site and Sample Location Plan
- Figure 3 – Soil Vapor Detections
- Figure 4 – Proposed Soil Vapor Extraction (SVE) Pilot Test Plan
- Figure 5 – Proposed Soil Vapor Extraction (SVE) Well Location Plan
- Figure 6 – Proposed Soil Vapor Extraction (SVE) System Plan
- Figure 7 – Proposed Soil Vapor Extraction (SVE) System Process and Instrumentation Diagram (P&ID)

TABLES

- Table 1 – Soil Vapor Extraction (SVE) System Pilot Test Monitoring Parameters
- Table 2 – Soil Vapor Extraction (SVE) System Well Locations and Rationale
- Table 3 – Proposed Project Schedule

APPENDICES

- Appendix A – Health and Safety Plan (HASP) and Community Air Monitoring Plan (CAMP)
- Appendix B – Quality Assurance Project Plan (QAPP)
- Appendix C – Proposed Soil Vapor Extraction (SVE) System Blower and Carbon Cut Sheets, and Carbon Sizing Design

LIST OF ACRONYMS

Acronym	Definition
1,1-DCE	1,1-dichloroethylene
1,4-Dx	1,4-dioxane
ADF	Air Discharge Facility
AGV	Air Guidance Value
AOC	Area of Concern
AST	Aboveground Storage Tank
AWQS	Ambient Water Quality Standard
BCP	Brownfield Cleanup Program
Cis-1,2-DCE	Cis-1,2-dichloroethylene
CBS	Chemical Bulk Storage
CERCLIS	Comprehensive Environmental Response, Compensation, and Liability Information System
CVOC	Chlorinated Volatile Organic Compound
DER-10	Division of Environmental Remediation Technical Guide 10
DOT	Department of Transportation
EC	Engineering Control
EM	Electromagnetic
eV	Electron Volt
EPA	United States Environmental Protection Agency
GPR	Ground Penetrating Radar
GPS	Global Positioning System
HASP	Health and Safety Plan
HAZWOPER	Hazardous Waste Operations and Emergency Response
IC	Institutional Control
LIRR	Long Island Railroad
MTA	Metropolitan Transit Authority
NGVD	National Geodetic Vertical Datum
ELAP	Environmental Laboratory Accreditation Program
NYSDEC	New York State Department of Environmental Conservation
NYSDOH	New York State Department of Health
OSHA	Occupational Safety and Health Administration
PBS	Petroleum Bulk Storage
PCB	Polychlorinated Biphenyl
PCE	Tetrachloroethylene
P.E.	Professional Engineer
PFOA	Perfluorooctanoic Acid
PFOS	Perfluorooctane Sulfonate
PGWSCO	Protection of Groundwater Soil Cleanup Objective
PID	Photoionization Detector

Acronym	Definition
QHHEA	Qualitative Human Health Exposure Assessment
QEP	Qualified Environmental Professional
RA	Remedial Action
RAWP	Remedial Action Work Plan
RI	Remedial Investigation
RIR	Remedial Investigation Report
RIWP	Remedial Investigation Work Plan
RRSCO	Restricted Residential Soil Cleanup Objective
SCO	Soil Cleanup Objective
SIM	Selective Ion Monitoring
SVOC	Semivolatile Organic Compound
TAL	Target Analyte List
TCE	Trichloroethylene
TOGS	Technical and Operational Guidance Series
Trans-1,2-DCE	Trans-1,2-dichloroethylene
TRIS	Toxic Release Inventory System
UST	Underground Storage Tank
UUSCO	Unrestricted Use Soil Cleanup Objective
VOC	Volatile Organic Compound

1.0 INTRODUCTION

This Interim Remedial Measure (IRM) Work Plan (IRMWP) has been prepared by AKRF, Inc. (AKRF) on behalf of Atlantic Chestnut Affordable Housing LLC (the Volunteer) for the Atlantic Chestnut – Lot 3 site, located at 275 Chestnut Street in Brooklyn, New York, hereafter referred to as the “Site”. The Site is identified on the New York City Tax Map as Brooklyn Tax Block 4143, Lot 3. Historically, Lot 1 encompassed the entirety of Block 4143, but was apportioned into three lots (Lots 1, 2, and 3) in 2016. A Site Location Map is provided as Figure 1.

Atlantic Chestnut Affordable Housing LLC entered into a Brownfield Cleanup Agreement (BCA) Index No. C224236-05-16 on May 26, 2016 with the New York State Department of Environmental Conservation (NYSDEC) as a Volunteer. A BCA amendment was submitted to the NYSDEC in August 2017 to document: (1) the change of address from 3301 Atlantic Avenue to 275 Chestnut Street, and (2) the acreage increase of the Site from 1.0475 acres to 1.2020 acres to support the redevelopment. The BCA amendment was executed on August 24, 2017. The current and former Brownfield Cleanup Program (BCP) Site boundaries are shown on Figure 2.

A Remedial Investigation (RI) was completed at the Site from December 2 to 14, 2016, and from November 6 to December 12, 2017 and a Draft RI Report (RIR) was submitted to NYSDEC in December 2017. Based on an evaluation of the data and information from the RI, there is contaminated soil, groundwater, and soil vapor present at the Site, including solvent-related volatile organic compounds (VOCs) and metals in soil; solvent-related VOCs in groundwater; and petroleum-, solvent-related, and refrigerant VOCs in soil vapor. Previous on-site investigations, summarized in Section 3.0, are sufficient to delineate the nature and extent of contamination at the Site.

This IRMWP has been prepared to address the potential for off-site migration of soil vapor until a remedy can be implemented under a NYSDEC-approved Remedial Action Work Plan (RAWP), currently anticipated to occur in December 2020.

The Health and Safety Plan (HASP) and Community Air Monitoring Plan (CAMP), provided as Appendix A, will be implemented during activities outlined in this IRMWP. The quality assurance/quality control (QA/QC) protocol detailed in the Quality Assurance Project Plan (QAPP), provided as Appendix B, will be strictly adhered to for the field work and sampling described in the following sections.

2.0 SITE DESCRIPTION AND HISTORY

2.1 Site Description and Surrounding Land Use

The Site is composed of a concrete- and asphalt-paved vacant lot with a former loading dock on the central portion of the Site. The Site formerly consisted of a series of vacant, interconnected, fire-damaged factory buildings that were demolished between July and December 2016. A Site Plan is provided as Figure 2.

The surrounding area is developed primarily with residential, commercial, manufacturing, transportation, and industrial uses. The elevated J and Z Metropolitan Transit Authority (MTA) subway tracks run along Fulton Street to the north and the Long Island Railroad (LIRR) tracks are located beneath Atlantic Avenue to the south.

2.2 Site Geology, Hydrogeology, and Subsurface Characteristics

The stratigraphy of the Site, from the surface down, generally consisted of fill comprising sand, silt, and gravel with varying amounts of concrete, brick, coal ash, clay, and asphalt up to 16 feet below grade, underlain by apparent native sand, gravel, clay, and silt to boring termination depths (up to 80 feet below grade). Bedrock was not encountered.

The Site lies at an elevation of approximately 37 to 41 feet above national geodetic vertical datum (NGVD), an approximate of mean sea level.

Groundwater was encountered during previous investigations at depths ranging from approximately 7.5 to 8.7 feet above NGVD. Based on the well elevation surveys, shallow, intermediate, and deep groundwater aquifers flow in a generally southerly direction beneath the Site and surrounding area. Groundwater in this part of Brooklyn is not used as a potable source and there are no surface water bodies on or immediately adjacent to the Site.

2.3 Site History and Previous Owners

Historic records indicate that the Site was developed with residences and a road in 1887 and with industrial and manufacturing uses, including the Columbia Machine Works and Malleable Iron Company, the Columbia Cable and Electric Corporation, Blue Ridge Farms, Inc., and Chloe Foods Corp. between 1908 and 2012. Blue Ridge Farms, Inc. and Chloe Foods Corp. are listed on multiple federal and state databases, as discussed in Section 3.0. Prior uses that appear to have led to Site contamination include blacksmithing and stamping, a brass foundry, woodworking, a machine shop, tank and engine rooms, an iron works, wire braiding, and cable manufacturing. The Site has remained vacant since a July 2012 fire caused severe structural damage to the former Site buildings. Demolition of the Site buildings was completed between July and December 2016.

Past owners of Block 4143, Lot 1 include: Columbia Electric Realty, Inc. in 1980; Avnal, Inc. from 1980 to 1984; Blue Ridge Farms, Inc. from 1984 to 2004; 3301 Atlantic Avenue, LLC from 2004 to 2013; Sapphire Luxury Estates, LLC from 2013 to 2014; Atlantic Chestnut, LLC from 2014 to 2015; and Atlantic Chestnut Affordable Housing, LLC from 2015 to present. It is noted that Block 4143 formerly comprised Lot 1, but was subsequently divided into three lots (Lots 1, 2, and 3).

2.4 Proposed Development

The proposed development is still being finalized but will likely include a parking garage in the cellar with a centrally-located courtyard and affordable residential units above. The ground floor may contain a school, residential amenities and a lobby, and/or community facility space. As part of the development, Dinsmore Place will be connected to Euclid Avenue across the northern portion of the Site. The project is proposed to be developed in accordance with New York City's Quality Housing Program and will satisfy one of the objectives of the Cypress Hills Brownfield Opportunity Area (BOA).

2.5 Proposed Project Schedule

Based on the proposed project schedule detailed in Section 7.0, an IRM was required to address the potential for off-site migration of soil vapor. The proposed soil vapor extraction (SVE) system, described in this IRMWP, will be operational by December 2018. The SVE system will run 24 hours a day, 7 days a week, 365 days a year until implementation of a NYSDEC-approved RAWP, expected to be implemented in January 2020.

3.0 PREVIOUS ENVIRONMENTAL REPORTS

Subsurface (Phase II) Investigation Report – Blue Ridge Farms, 3301 Atlantic Avenue, 84 Dinsmore Place, and 111 Dinsmore Place, Brooklyn, New York, AKRF, Inc. (AKRF) May 2001

AKRF conducted a Subsurface (Phase II) Investigation of a larger area including the Site in May 2001. At the time of this investigation, the Site was developed with a food processing and storage buildings. The Subsurface (Phase II) Investigation included the performance of a geophysical survey across exterior portions of the Site and the advancement of four soil borings with the collection and analysis of soil and groundwater samples. The scope of the investigation was based on a December 2000 Phase I Environmental Site Assessment (ESA) of the Site by IVI Environmental, Inc.

Due to reinforced concrete across the Site, the geophysical survey was inconclusive. Soil consisted of fill material (brick, concrete, asphalt, clay, silt, sand, and gravel) up to 6 feet below grade, underlain by native soil (sand, gravel, silt, and clay) to 16 feet below grade. Groundwater was encountered at approximately 32 feet below grade.

Petroleum-related VOCs and the SVOC naphthalene were detected in the soil samples collected above NYSDEC Recommended Soil Cleanup Objectives (RSCOs) listed in the NYSDEC Technical and Administrative Guidance Memorandum (TAGM), the applicable soil cleanup objectives at the time of the investigation. Solvent and petroleum-related VOCs and metals were detected in the groundwater sample above Ambient the Guidance Values listed in the NYSDEC Division of Water Technical and Operational Guidance Series (TOGS) Memo. VOCs were detected above TOGS standards in pre- and post-process water samples. Based on elevated photoionization detector (PID) detections and laboratory analytical data from the soil borings surrounding the on-site tank system, Spill No. 0101620 was assigned to the historic address 3301 Atlantic Avenue.

AKRF recommended preparation of a work plan to be submitted to the NYSDEC to further delineate, excavate, and dispose of petroleum-contaminated soil at the Site to close Spill No. 0101620.

Phase I Environmental Site Assessment (ESA) Report – 3301 Atlantic Avenue, 3238 Fulton Street, 226-296 Euclid Avenue, and 215-279 Chestnut Street, Brooklyn, New York, Property Solutions, Inc. (PSI), June 2010

PSI conducted a Phase I ESA of a larger area including the Site in April 2014. The Phase I ESA identified historical uses including: a machine and iron works facility, an electrical cable manufacturer, and a food processing plant; records indicating that five underground storage tanks (USTs) were previously located at 3301 Atlantic Avenue, a historic address encompassing current BCP Site Nos. C224234, C224235, and C224236; and Historic Recognized Environmental Conditions (HRECs) including listing in the Leaking UST (LUST) and Spills databases. PSI recommended conducting a subsurface investigation, including a geophysical survey, to investigate the potential impacts associated with historic operations and fuel oil storage.

Asbestos Investigation and Bulk Sample/Laboratory Analysis – 3301 Atlantic Avenue, Brooklyn, New York, Safety Environmental, Co. of NY, Inc. (Safety), July 2013

Safety conducted an asbestos survey of the buildings located on the northern portion of the Site and north-adjacent to the Site in July 2013. A total of 131 samples were collected for laboratory analysis from on- and off-site portions of the buildings. Asbestos-containing material (ACM) was identified within the building at the following locations: boiler No. 4 door insulation, boiler No. 3 caulking, first floor pipe insulation, roof transite shingles, roof membranes, roof flashing, and roof vent membranes. Based on AKRF's inspections of BCP Site Nos. C224234, C224235, and C224236 prior to building demolition, it is noted that the boilers were formerly located on the northwestern

portion of BCP Site No. C224234. It is unknown how many ACM samples were collected at the Site vs. the adjacent BCP sites. Safety recommended removal of all ACM prior to demolition of the buildings.

Phase I Environmental Site Assessment (ESA) Report – 3301 Atlantic Avenue (Block 4143, Lot 1), Brooklyn, New York, Legette, Brashears, & Graham, Inc. (LBG), March 2014

LBG conducted a Phase I ESA of the Site and the north-adjointing area in April 2014. The Phase I ESA identified RECs associated with former uses, including: blacksmithing and stamping, a machine and iron works shop, an electric cable manufacturer, a gasoline filling station, and listings in the Spills database. The report noted the following *de Minimis* conditions: nearby hazardous materials/waste storage, use, or releases; and the potential presence of ACM, lead-based paint (LBP), and fluorescent lighting. LBG recommended that any contaminated soil discovered during redevelopment of the Site should be handled according to applicable federal, state, and local regulations.

Chain of Title Summary Report – 3301 Atlantic Avenue and 242 Chestnut Street, Brooklyn, New York, Phipps Houses, 2015

A Chain of Title Summary Report was compiled by Phipps Houses that outlined ownership of the Site and north-adjointing (BCP Site Nos. C224234 and C224235) and nearby properties between 2004 and 2015. The report showed the transfer of ownership from Blue Ridge Farms, Inc. to 3301 Atlantic Avenue, LLC in May 2004; from 3301 Atlantic Avenue, LLC to Sapphire Luxury Estates, LLC in July 2013; a foreclosure and sale judgment for the Site and north-adjointing properties to be sold at public auction in September 2013; and an agreement for assignment of rights and claims from Blue Ridge Farms, Inc. to 3301 Atlantic Partners, LLC in March 2014.

Phase I Environmental Site Assessment (ESA) Report – 3301 Atlantic Avenue and 242 Chestnut Street, Brooklyn, New York, AKRF, Inc. (AKRF), September 2015

AKRF conducted a Phase I ESA of a larger area including the Site in September 2015. The Phase I ESA identified the following:

- Historic on-site industrial operations, including the Columbia Machine Works and Malleable Iron Company, and the Columbia Cable and Electric Corporation. Undocumented releases from historic industrial uses may have affected subsurface conditions at the Site.
- The address 3301 Atlantic Avenue was formerly associated with the entirety of Block 4143. At the time of the Phase I ESA, 3301 Atlantic Avenue was listed in the following databases: PBS database for the storage of several USTs and aboveground storage tanks (ASTs); Comprehensive Environmental Response, Compensation, and Liability Information System (CERCLIS); Chemical Bulk Storage (CBS); Spill database; Toxic Release Inventory System (TRIS); and Air Discharge databases. These listings may have been related to the Site and/or north-adjointing property(ies).
- The former interconnected factory buildings on the northeastern portion of the Site and the north-adjointing properties (BCP Sites No. C22434 and C224235) were damaged by a fire in 2012. Abundant debris, including metal, wood, and ash were observed throughout the buildings during the Site inspection. Based on the documented storage of petroleum and chemicals, the report noted that undocumented discharges due to the fire may have affected subsurface conditions at the Site, including high concentrations of metals and semivolatile organic compounds (SVOCs) in the ash.
- Two July 2013 Asbestos Reports identified ACM throughout the buildings' interiors and on exterior built-up roofing materials. Interior and exterior building materials were observed to be in fair to poor condition, with the majority of the northeastern portion of the Site buildings

damaged by fire. Observed painted surfaces were generally in fair to poor condition. Based on the age of the Site buildings, the report noted that LBP may have been present and the fluorescent lighting fixtures and remaining electrical equipment may have contained mercury and/or polychlorinated biphenyls (PCBs). No evidence of leaks or stains from these fixtures and equipment was observed; however, it was noted that releases may have occurred during the fire that were not able to be investigated due to inaccessibility and/or debris throughout the Site buildings.

AKRF recommended a Subsurface (Phase II) Investigation to characterize subsurface conditions of soil, groundwater, and soil vapor throughout the Site and BCP Site Nos. 224234 and 224235 prior to redevelopment.

Subsurface (Phase II) Investigation Report – 3301 Atlantic Avenue, Brooklyn, New York, AKRF, Inc. (AKRF), January 2016

AKRF conducted a Subsurface (Phase II) Investigation at the Site in December 2015. The investigation included: the advancement of three soil borings with the collection and laboratory analysis of six soil samples; the installation of two temporary, one-inch diameter groundwater monitoring wells at two of the boring locations with the collection and laboratory analysis of two groundwater samples; and the installation of two temporary soil vapor points with the collection and laboratory analysis of two soil vapor samples. An ambient air sample was collected from the northern portion of Block 4143 for comparison and quality assurance/quality control (QA/QC) purposes.

Historic fill materials (including sand, gravel, silt, clay, ash, concrete, brick, and asphalt) were observed from just below the surface to approximately three feet below grade within the soil borings, underlain by apparent native sand, clay, and gravel to termination depths. PID readings were not detected in the soil borings advanced during the investigation.

No free phase product was detected in either of the monitoring wells during the sampling event. A slight sheen was observed on the groundwater in monitoring well L3-SI-MW-1 during sampling. Results of the soil sample analysis were as follows:

- The VOC cis-1,2-dichloroethylene (cis-1,2-DCE) was detected in soil sample L3-SI-SB-4 (14-15) at a concentration above its Unrestricted Use Soil Cleanup Objective (UUSCO), but below its Restricted Residential Soil Cleanup Objective (RRSCO). Trichloroethylene (TCE) was detected in soil samples L3-SI-SB-1 (0-2) and L3-SI-SB-4 (14-15) at concentrations exceeding its UUSCO and RRSCO. TCE is a chlorinated solvent, which was likely used during historic operations at the Site and cis-1,2-DCE is a breakdown compound of TCE.
- Zinc was detected in soil sample L3-SI-SB-4 (0-2) at a concentration exceeding its UUSCO, but below its RRSCO. This metal detection is likely related to historic filling and/or historic operations at the Site.
- PCBs were not detected above laboratory reporting limits, and SVOCs and pesticides were not detected above applicable standards in any of the soil samples analyzed.

Results of the groundwater sample analyses were as follows:

- The VOCs trans-1,2-dichloroethylene (trans-1,2-DCE) and vinyl chloride were detected in groundwater sample L3-SI-GW-1 at concentrations above their respective TOGS standard. TCE was detected in both of the groundwater samples (L3-SI-GW-1 and L3-SI-GW-4) at concentrations above its AWQS. The detection of TCE is likely related to historic operations at the Site and the presence of trans-1,2-DCE is a breakdown compound.

- The SVOCs benzo(a)anthracene and chrysene were detected in groundwater sample L3-SI-GW-1 at estimated concentrations above their respective TOGS standards. However, these detections were likely related to sediment entrained in the sample and not necessarily indicative of groundwater conditions at the Site.
- Nickel was detected in unfiltered groundwater sample L3-SI-GW-4 at a concentration exceeding its TOGS standard. Sodium was detected in both of the unfiltered groundwater samples L3-SI-GW-1 and L3-SI-GW-4 at concentrations above its TOGS standard. Sodium was also detected in the filtered groundwater samples L3-SI-GW-1 and L3-SI-GW-4 in concentrations above its TOGS standard.
- PCBs and pesticides were not detected above laboratory reporting limits in any of the groundwater samples analyzed.

Results of the soil vapor sample analyses were as follows:

- Petroleum-related compounds were detected in each of the soil vapor samples at individual concentrations up to 422 $\mu\text{g}/\text{m}^3$. Solvent-related compounds were detected at individual concentrations up to 9,190 $\mu\text{g}/\text{m}^3$. According to NYSDOH Soil Vapor/Indoor Air Matrix 1, the applicable matrix for TCE, sub-slab soil vapor concentrations of 250 $\mu\text{g}/\text{m}^3$ and above resulted in a “mitigate action”, even if the indoor air concentration is less than 0.25 $\mu\text{g}/\text{m}^3$. PCE and TCE are chlorinated solvents, which were likely used during historic operations at the Site.

The Subsurface (Phase II) Investigation Report concluded that there was solvent-related contamination in soil, groundwater, and soil vapor and petroleum-related contamination in soil vapor present at the Site. These detections appeared to be related to historic use at the Site.

BCA Amendment Application – 275 Chestnut Street, Brooklyn, New York, AKRF, Inc. (AKRF), July 2017

AKRF prepared a BCA Amendment Application for the Site in July 2017 to document the change of address from 3301 Atlantic Avenue to 275 Chestnut Street, as filed with the New York City Department of Buildings (NYCDOB); and to document the alteration of the northern property boundary, resulting in an acreage increase from approximately 1.0475 acres to approximately 1.2020 acres. The BCA Amendment was filed on October 23, 2017.

Draft Remedial Investigation Report – 275 Chestnut Street, Brooklyn, New York, AKRF, Inc. (AKRF), December 2017

AKRF conducted an RI at the Site from December 2 to 14, 2016, and from November 6 to December 12, 2017. The scope of the RI was based on a November 2016 Remedial Investigation Work Plan (RIWP) and a November 2017 Supplemental RIWP (SRIWP), and included: the performance of a geophysical survey and utility mark-outs; the advancement of 36 soil borings across the Site and collection of 130 soil samples for chemical analysis from the soil borings to evaluate soil quality; the installation of 11 permanent 2-inch diameter groundwater monitoring wells and 7 permanent 2-inch diameter nested groundwater monitoring wells and collection of 32 groundwater samples for chemical analysis from the monitoring wells to evaluate groundwater quality; the installation of 7 temporary soil vapor probes across the Site and collection of 7 soil vapor samples and 1 ambient air sample for chemical analysis; and the survey of groundwater monitoring well elevations on the Site and north-adjacent lots [Atlantic Chestnut – Lot 1 (BCP Site No. C224234 and Atlantic Chestnut – Lot 2 (BCP Site No. C224235)] to develop groundwater contour maps and determine groundwater flow beneath the Site and surrounding area.

The RI was conducted in two phases: in December 2016 and between November and December 2017. The goal of the first phase of the RI was to determine the extent of soil, groundwater, and soil vapor contamination identified during AKRF’s December 2016 Subsurface (Phase II) Investigation. The

second phase of the RI was conducted to further horizontally and vertically delineate soil and groundwater contamination identified during the first phase of the RI, to investigate the presence of the emerging contaminants 1,4-dioxane (1,4-Dx), perfluorooctanoic acid (PFOA), and perfluorooctanoic sulfonate (PFOS) in shallow, intermediate, and deep groundwater across the Site, and to aid in the design of the remedy. Based on the RI results, the primary contaminants of concern (COCs) at the Site include CVOCs, specifically TCE and its breakdown compounds 1,1-DCE, cis-1,2-DCE, and trans-1,2-DCE in soil; TCE and PCE, and their associated breakdown compounds vinyl chloride, 1,1-DCE, cis-1,2-DCE, and trans-1,2-DCE in groundwater; and, TCE and PCE in soil vapor.

The CVOCs detected in soil above UUSCOs, RRSCO, and/or Protection of Groundwater Soil Cleanup Objectives (PGWSCO) were mostly found in the northern portion of the Site, with the greatest concentrations of TCE at borings L3-SRI-SB-16 [383 milligrams per kilogram (mg/kg)] and L3-SRI-SB-17 (351 mg/kg) from 4 to 5 feet below grade. TCE was also detected above UUSCOs and PGWSCO in the southwestern portion of the Site at L3-SRI-SB-6 (5.47 mg/kg) from 12 to 13 feet below grade. The TCE contamination on the northern portion of the Site extends vertically down to 7 to 13 feet below grade except at L3-SRI-SB-2, where the contamination extends down to 25 feet below grade, and L3-SRI-SB-2 and L3-SRI-SB-3 where it extends down to the shallow groundwater table. The greatest concentrations of 1,1-DCE, cis-1,2-DCE, and trans-1,2-DCE were found at soil borings L3-SRI-SB-15 and L3-SRI-SB-16, also located in the northern portion of the Site. In addition to the CVOCs, several metals, including copper, lead, hexavalent chromium, and zinc are present in soil across the Site at concentrations above UUSCOs. Mercury was detected in one shallow sample on the western portion of the Site above its UUSCO and RRSCO. These exceedances are most likely attributable to historic filling, undocumented discharges due to a fire in 2012, and/or historic operations at the Site.

The vertical and horizontal extent of CVOCs in groundwater is consistent with a Site-specific groundwater flow to the south and southwest, and the concentrations of CVOCs in soil. The greatest concentrations of TCE in the shallow groundwater were found on the north-central portion of the Site; specifically at L3-SRI-MW-2 [1,070 micrograms per Liter ($\mu\text{g/L}$)] and L3-SRI-MW-10 (408 $\mu\text{g/L}$), with lesser concentrations on the western and southwestern portion of the Site ranging from 89.7 $\mu\text{g/L}$ (L3-SRI-MW-4) to 322 $\mu\text{g/L}$ (L3-SRI-MW-7). TCE concentrations decrease significantly vertically and horizontally moving southeast across the Site. PCE was detected slightly above their respective TOGS standards in the shallow groundwater at L3-SRI-MW-1 (6.4 $\mu\text{g/L}$) and L3-SRI-MW-2 (5.2 $\mu\text{g/L}$) in the northern and western portions of the Site. TCE breakdown compounds, including 1,1-DCE, cis-1,2-DCE, trans-1,2-DCE, and vinyl chloride were detected above their respective TOGS standards in shallow groundwater samples collected from wells L3-SRI-MW-6 and L3-SRI-MW-7, and in the intermediate groundwater sample collected from L3-SRI-MW-6, which are located on the southern portion of the Site close to the in-situ chemical oxidation injection points associated with closed Spill Nos. 8805745 and 0101620. The elevated detections of breakdown compounds are likely breakdown compounds related to the partial treatment of CVOCs from the in-situ chemical oxidation program that was conducted to remediate the petroleum spills.

Elevated concentrations of TCE and PCE were detected in each of the soil vapor samples collected along the eastern, southern, and western Site boundaries. The highest concentrations of TCE and PCE were 7,690 micrograms per cubic meter ($\mu\text{g/m}^3$) (L3-SRI-SV-5) and 8,070 $\mu\text{g/m}^3$ (L3-SRI-SV-4) collected from the southeastern and southwestern Site boundaries, respectively. Cis-1,2-DCE was detected at 1,150 $\mu\text{g/m}^3$ (L3-SRI-SV-6) on the southwestern portion of the Site. In addition, the refrigerants trichlorofluoromethane and dichlorodifluoromethane were detected in several soil vapor samples across the Site, with the highest concentrations on the northwestern portion of the Site (323 $\mu\text{g/m}^3$ of dichlorodifluoromethane) at the location of the former Chloe Foods cold storage room.

4.0 NATURE AND EXTENT OF CONTAMINATION

4.1 Conceptual Model of Site Contamination

Site contamination, present in shallow and deep soil; shallow, intermediate, and deep groundwater; and soil vapor across the Site, appears to be related to the Site's historic industrial and manufacturing uses. The CVOCs detected in soil above UUSCOs, RRSCO, and/or PGWSCO were mostly found in the northern portion of the Site, with the greatest concentrations of TCE in shallow soil from 4 to 5 feet below grade and in deep soil between 12 and 13 feet below grade on the southern portion of the Site. Slightly lesser concentrations of TCE were detected in deeper soil on the northern portion of the Site extending down to the groundwater table. Breakdown solvent compounds, including 1,1-DCE, cis-1,2-DCE, and trans-1,2-DCE, were also detected on the northern portion of the Site. In addition to the CVOCs, metals, including copper, lead, hexavalent chromium, and zinc are present in soil across the Site at concentrations above UUSCOs. Mercury was detected in one shallow sample on the western portion of the Site above its UUSCO and RRSCO. These exceedances are most likely attributable to historic filling, undocumented discharges due to a fire in 2012, and/or historic operations at the Site.

The vertical and horizontal extent of CVOCs in groundwater is consistent with a Site-specific groundwater flow to the south and southwest, and the concentrations of CVOCs in soil. The greatest concentrations of TCE in the shallow groundwater were found on the north-central portion of the Site, with lesser concentrations on the western and southwestern portions of the Site. TCE concentrations decrease significantly vertically and horizontally moving southeast across the Site. TCE breakdown compounds, including 1,1-DCE, cis-1,2-DCE, trans-1,2-DCE, and vinyl chloride were detected above their respective standards in shallow and intermediate groundwater samples collected from wells on the southern portion of the Site, proximal to the in-situ chemical oxidation injection points associated with closed Spill Nos. 8805745 and 0101620. The elevated detections of breakdown compounds are likely side effects of partially treating some CVOCs from the in-situ chemical oxidation program conducted to remediate the petroleum spills.

Elevated concentrations of TCE and PCE were detected in each of the soil vapor samples collected along the eastern, southern, and western Site boundaries. The highest concentrations of TCE and PCE were collected from the southeastern and southwestern Site boundaries and breakdown compounds were detected at elevated concentrations on the southwestern portion of the Site. In addition, the refrigerants trichlorofluoromethane and dichlorodifluoromethane were detected in several soil vapor samples across the Site, with the highest concentrations on the northwestern portion at the location of the former Chloe Foods cold storage room. Soil vapor sample concentrations are shown on Figure 3.

4.2 Contaminated Media

The subsurface investigations conducted at the Site concluded that contaminated soil, groundwater, and soil vapor are present. Elevated concentrations of solvents in shallow and deep soil were detected on the northern and southern portions of the Site, with concentrations exceeding applicable standards extending to the groundwater table on the northern portion of the Site. The vertical and horizontal extent of CVOCs in groundwater is consistent with a Site-specific groundwater flow to the south and southwest and the concentrations of CVOCs in soil, with the greatest concentrations on the northern portion of the Site and breakdown compounds on the southern and southwestern portions of the Site. Elevated concentrations of solvent-related VOCs were detected in soil vapor across the Site and elevated concentrations of refrigerants were detected on the northwestern portion of the Site.

4.3 Qualitative Human Health Exposure Assessment (QHHEA)

A QHHEA was completed as part of the RIR. The results of the QHHEA indicated that existing soil and groundwater conditions do not pose a threat to human health, as the Site is undeveloped and fully capped with concrete and asphalt, and groundwater is not used as a source of drinking water in this part of Brooklyn. However, the QHHEA concluded that there is a potential exposure pathway from soil vapor emanating from the subsurface to enter into the adjoining buildings as a result of any basement floor or lower wall openings/cracks. The indoor air quality at the adjoining properties could be susceptible to contamination from subsurface vapor intrusion.

5.0 INTERIM REMEDIAL MEASURE (IRM): SOIL VAPOR EXTRACTION (SVE) SYSTEM

This section describes the proposed IRM for the Site, which includes the installation, startup, and operation and maintenance of an SVE system to mitigate the potential for off-site migration of VOCs in soil vapor until a Site-wide remedy can be implemented under a NYSDEC-approved RAWP, currently anticipated to begin in December 2021. The proposed SVE system targets the eastern, southern, and western Site boundaries; off-site soil vapor migration to the north will be addressed by proposed SVE systems to be installed on the north-adjacent BCP Sites (NYSDEC BCP Site Nos. C224234 and C224235). The three proposed SVE systems will be operational by the end of 2018.

A pilot study will be conducted prior to final design and installation of the full-scale SVE system, as shown on Figure 4. After installation and start-up, the SVE system will apply a negative pressure (vacuum) to the subsurface to recover and treat vapor beneath the Site boundaries. Recovered vapors will be directed to an aboveground vapor treatment system consisting of granular-activated carbon (GAC), and will be subsequently discharged to the atmosphere in accordance with 6 NYCRR Part 212.

5.1 Treatment Area

Soil vapor sampling conducted during the RI identified individual CVOC concentrations up to 8,070 $\mu\text{g}/\text{m}^3$, petroleum-related compounds at concentrations up to 17 $\mu\text{g}/\text{m}^3$, and refrigerants up to 323 $\mu\text{g}/\text{m}^3$, as shown on Figure 3. The elevated concentrations were detected across the Site. The target area for the SVE system is the vadose (unsaturated) zone comprising approximately 207 linear feet along the western Site boundary, approximately 305 linear feet along the southern Site boundary, and approximately 125 linear feet along the eastern Site boundary. The proposed target area is shown on Figure 5.

5.2 SVE Pilot Test

5.2.1 Pilot Test SVE Well Installation

To conduct the pilot test, one SVE well, denoted as L3-SVE-5, will be installed at the approximate location shown on Figure 4.

L3-SVE-5 will be installed using a hollow-stem auger (HSA) truck-mounted rotary rig with 6.25-inch outside diameter augers. The well will be installed with 4-inch diameter Schedule 40 polyvinyl chloride (PVC) pipe, with a length of 0.020-inch slotted screen installed between 5 and 15 feet below grade, and solid riser from 5 feet below grade to grade. A No. 2 sand filter pack will be installed around and to 2 feet above the top of the well screen. Approximately 1 foot of hydrated bentonite will be installed above the sand filter pack and a non-shrinking bentonite-cement grout will be used to fill the annular space to grade. L3-SVE-5 will be finished with a locking cap in a concrete box with an apron around the curb box to direct run-off away from the well. Screened intervals for the pilot test and full-scale system wells are presented in Table 1 in Section 5.2.6 of this IRMWP.

Drill cuttings will be inspected by AKRF field personnel for evidence of contamination (e.g., odors and staining) and screened for VOCs with a PID equipped with an 11.7 electron volt (eV) lamp. The PID will be calibrated in accordance with manufacturer's specifications prior to screening. Drill cuttings will be managed in accordance with the requirements detailed in Section 5.7.

5.2.2 Vapor Monitoring Point (VMP) Installation

Seven VMPs (denoted as L3-VMP-1 through L3-VMP-7) will be installed using a direct-push probe (DPP) rig at the locations shown on Figure 4. One VMP will be installed approximately 30 feet south of L3-SVE-5 due to its proximity to the southern Site

boundary. VMPs will also be installed approximately 20 and 40 feet north, east, and west of L3-SVE-5.

Each VMP will be installed with a probe set at approximately 15 feet below grade, the approximate bottom of the screened interval of L3-SVE-5, and will be used to measure the effective radius of influence (ROI) of L3-SVE-5. At each VMP, the six-inch stainless steel screen implants will be connected to Teflon™-lined tubing and installed to the target depth. The tubing will extend from the end of the screen to above grade. The annular space around the point and tubing will be backfilled with clean silica sand to between approximately 3 and 6 inches above the screen. Hydrated bentonite will be used to fill the remaining void around the tubing to approximately 1 foot below grade and a non-shrinking cement-grout mixture will fill the void to grade. The VMPs will be finished with flush-mounted locking well covers.

5.2.3 Baseline Monitoring

Baseline monitoring will be conducted to provide data for static conditions prior to initiating the pilot test. The measurements from L3-SVE-5 and the VMPs will include the following:

- Vacuum/pressure of well headspace using a magnehelic gauge;
- VOCs of well headspace using a PID; and
- Oxygen (O₂) of well headspace using an O₂ meter.

Each monitoring point will be fitted with an expandable well cap that will be pre-drilled with a hose fitting and connected to a section of hose to allow for headspace readings (vacuum/pressure, VOCs, O₂) within the well. Magnehelic gauges measuring a range of 0 to 5 inches of water (in H₂O) will be utilized during the baseline monitoring to measure vacuum and/or pressure at the VMPs.

5.2.4 Blower Calibration

A skid-mounted regenerative blower with a capacity of 100 cubic feet per minute (cfm) at a vacuum of 40 in H₂O, will be utilized for the pilot test. The system will be equipped with a flow meter, and vacuum gauge. The blower specifications and blower curve for a typical blower that may be used during the pilot test is provided in Appendix C. The actual blower make and model will depend on availability at the time of the pilot test.

Following installation of the SVE blower assembly, the blowers, gauges, and monitoring equipment will be checked for functionality. The SVE blower will be operated initially to determine the maximum flow rate and applied vacuum. The system will then be shut off.

5.2.5 Pilot Test Implementation

To specify design details for the proposed SVE system, the bench-scale pilot test will be performed to confirm the radius of influence (ROI) around each SVE well and to evaluate the appropriate blower sizing. Effluent vapor sampling will be conducted to determine the change out schedule and sizing of the proposed GAC vapor treatment prior to discharge into the atmosphere.

The pilot test will be performed at L3-SVE-5 in step tests utilizing three increasing air flow rates as a percentage (25%, 50%, and 100%) of the maximum blower capacity without inducing significant upwelling and/or water entrainment. The maximum capacity will be determined as part of the blower calibration described in Section 5.2.4.

5.2.5.1. Pilot Test SVE Well Communication Testing

After pilot test well L3-SVE-5 is constructed, it will be connected to a blower and the corresponding subsurface vacuum will be measured using magnehelic differential pressure gauges at the VMPs. The results of the testing will be used to establish the necessary quantity and locations of SVE wells for the full-scale SVE system. Throughout the pilot test, extraction air flow rate and applied vacuum will be measured at L3-SVE-5, induced vacuum will be measured at the VMPs, and total VOC concentrations will be measured in both the extraction well (L3-SVE-5) and vapor monitoring points (L3-VMP-1 through L3-VMP-7) using a PID. The data will be recorded on pilot test data sheets, included as an appendix to the IRM Report (IRMR), and plotted graphically to aid in optimizing the system design.

Monitoring will consist of measuring vacuum at each point with a magnehelic differential pressure gauge during operation. A vacuum reading of 0.1 inch of water column will be utilized as the minimum induced vacuum target for the monitoring points during the SVE testing to establish the design ROI for the respective extraction well.

The blower will be attached to the extraction well with a two-inch diameter PVC piping, and a dilution valve will be installed to adjust the flow rate and vacuum of the blower. This will allow the applied vacuum to be adjusted by bleeding in ambient air through a bypass valve. The blower will be equipped with a moisture separator, flow meter, and a vacuum gauge. One GAC filter equipped with a minimum of 175 pounds of carbon will be used to treat recovered vapors during the pilot test. Sampling ports will be provided to determine the influent VOC concentrations.

The capacity (vacuum and flow) at each SVE well will be evaluated for use in the final system design, including the number and locations of SVE wells, blower specifications, and components.

5.2.5.2. Test Monitoring Parameters and Procedure

Three step tests will be conducted at varying flow rates and vacuums described in Section 5.2.5. During each test, the parameters listed in Table 1 will be measured in the SVE well and vapor monitoring points.

**Table 1
Soil Vapor Extraction System Pilot Test Monitoring Parameters**

SVE Well	Vapor Monitoring Points
<ul style="list-style-type: none"> • Applied Vacuum • Air Flow • VOC concentration (influent, effluent) • O₂ (influent) 	<ul style="list-style-type: none"> • Induced vacuum (well cap) • VOCs (well cap) • O₂ (well cap)

Data will be collected at approximate 30-minute intervals for a minimum period of two hours and until steady state conditions are reached.

Atmospheric conditions, including barometric pressure, humidity, and wind direction and speed, will be collected at the start of the day and periodically throughout the test. During each step test, the extraction well will be monitored for the following parameters: applied vacuum, air flow, and influent and effluent VOC concentrations. Observation points will be monitored for induced vacuum and VOC concentrations.

5.2.5.3 Vapor Sampling

One influent and one effluent air sample will be collected during each step test for laboratory analysis of VOCs by EPA Method TO-15 to determine VOC mass loading and associated treatment requirements as part of the design for a full-scale SVE system. The laboratory sample collected during the pilot testing will be collected in a Tedlar® bag and analyzed by a NYSDOH-certified laboratory with Category B deliverables.

5.3 Full-Scale Soil Vapor Extraction Well Installation

The proposed full-scale SVE system design described in the following sections are based on anticipated design parameters and the design will be reevaluated and finalized based upon the pilot test (described in Section 5.2). Based upon an anticipated ROI of 40 feet, it is anticipated that SVE wells L3-SVE-1 through L3-SVE-4 and L3-SVE-6 through L3-SVE-8 will be installed at the approximate locations shown on Figure 5.

5.3.1 SVE Well Installation

Based upon an assumed ROI of 40 feet, the SVE wells will be spaced on approximately 70- to 80-foot centers. The proposed full-scale SVE system design described in the following sections is based on anticipated design parameters; the design will be reevaluated and finalized based upon the pilot test results. Design parameters will be confirmed with NYSDEC prior to finalizing system design.

The proposed SVE well locations and rationales are summarized in Table 2.

Table 2
Soil Vapor Extraction System Well Locations and Rationale

SVE Well ID	On-Site Location	Screened Interval(s)	Rationale
L3-SVE-1	Northwestern	5-15' below grade	To prevent off-site migration of soil vapor to the west
L3-SVE-2	West-central	5-15' below grade	To prevent off-site migration of soil vapor to the west
L3-SVE-3	Southwestern	5-15' below grade	To prevent off-site migration of soil vapor to the south and west
L3-SVE-4	Southern	5-15' below grade	To prevent off-site migration of soil vapor to the south
L3-SVE-5*	South-central	5-15' below grade	To prevent off-site migration of soil vapor to the south
L3-SVE-6	Southern	5-15' below grade	To prevent off-site migration of soil vapor to the south
L3-SVE-7	Southeastern	5-15' below grade	To prevent off-site migration of soil vapor to the south and east
L3-SVE-8	Northeastern	5-15' below grade	To prevent off-site migration of soil vapor to the east
Notes: * SVE system well L3-SVE-5 will be installed for use during the pilot test.			

The following sections describe the methods that will be used to complete the aforementioned SOW.

5.4 System Location and Components

The proposed layout of the SVE system is shown on Figure 6 and a conceptual process and instrumentation diagram (P&ID) detailing the SVE system components is provided as Figure 7. The layout of the proposed system will be confirmed or altered, based on the results of the pilot

test. Each SVE well will be installed and constructed using the same methodology as the pilot test well (see Section 5.2.1) and connected to the system via a horizontal leg of aboveground, 4-inch diameter Schedule 40 PVC, which will be insulated and wrapped with heat tape. The piping will be sloped at least 1% toward the SVE wells.

Tentatively, the proposed SVE system is composed of the following:

- Eight 4-inch diameter PVC SVE wells along the southern, eastern, and western Site boundaries.
- Ancillary equipment, including flow meters, vacuum gauges, throttling valves, etc.
- One appropriately-sized blower to extract soil vapor, with a variable frequency drive (VFD) to throttle blower operation to appropriate conditions (vacuum and airflow rate). The blower will be selected based on the results of the pilot test.
- A dedicated, centrally-located equipment enclosure.
- A control panel equipped with a telemetry system to notify select personnel of alarm conditions.
- A vapor treatment system composed of two 400-pound GAC units in series.
- An effluent stack consisting of an 8-inch pipe extending from the equipment enclosure on the central portion of the Site through the roof and terminating a minimum of 12 feet above the ground and at least 10 feet from any building intakes or operable windows.

The three individual SVE lines on the western portion of the Site (L3-SVE-1 through L2-SVE-3), the three individual SVE lines on the southern portion of the Site (L3-SVE-4 through L3-SVE-6), and the two individual lines on the eastern portion of the Site (L3-SVE-7 and L3-SVE-8) will be each manifolded into a single 6-inch line, L3-SVE-A, L3-SVE-B, and L3-SVE-C, respectively. These three lines will be manifolded again into a single inlet line, leading into a moisture separator tank, with associated transfer pump and a 55-gallon drum with a high-level alarm. The outlet of the moisture separator will be connected to a particulate filter and dilution valve with fresh air intake, followed by the SVE blower with VFD. The blower will be equipped with a VFD, which will be used to throttle the blower during SVE system balancing. Pre- and post-blower pressure and temperature gauges will be installed to monitor strain across the blower. The outlet of the SVE blower will lead directly to the influent port of the carbon treatment system. The proposed SVE system will include a remote telemetry system and automated shutdown conditions to prevent equipment breakdown.

The carbon treatment system will comprise two 400-pound GAC units connected in series. Influent, intermediate, and effluent sample ports and pressure gauges will be installed on the carbon system for monitoring purposes. The outlet of the second GAC unit in series will lead to an effluent stack, with a final discharge point located a minimum of 12 feet above grade and at a minimum of 10 feet from any operable windows, adjoining or adjacent buildings, heating, ventilation, and air conditioning (HVAC) intakes or supply registers. The proposed blower and GAC unit cut sheets are included in Appendix C.

5.5 Soil Vapor Extraction (SVE) Well Location Survey

The SVE wells will be surveyed by a New York State-licensed surveyor to determine their accurate location.

5.6 Decontamination Procedures

All non-dedicated sampling equipment will be decontaminated between discrete locations using the following procedure:

1. Scrub equipment with a bristle brush using a tap water/Alconox[®] solution.
2. Rinse with tap water.
3. Scrub again with a bristle brush using a tap water/Alconox[®] solution.
4. Rinse with tap water.
5. Rinse with distilled water.
6. Air-dry the equipment.

5.7 Management of Investigation-Derived Waste (IDW)

Soil cuttings will be containerized in properly labeled Department of Transportation (DOT)-approved 55-gallon drums for future off-site disposal at a permitted facility. The drums will be sealed at the end of each work day and labeled with the date, the SVE well ID(s), the type of waste (i.e., drill cuttings) and the name of an AKRF point-of-contact. All drums will be labeled "pending analysis" until laboratory data is available. All IDW will be disposed of or treated according to applicable local, state, and federal regulations. Disposable sampling equipment, including spoons, gloves, bags, paper towels, etc. that come in contact with environmental media will be double bagged and disposed of as municipal trash in a facility trash dumpster as non-hazardous refuse.

6.0 REPORTING REQUIREMENTS

6.1 Interim Remedial Measure Report (IRMR)

Upon completion of all field work and receipt of laboratory analytical results, an IRMR will be prepared that will: document field activities; present field and laboratory data; and discuss conclusions and recommendations drawn from the results of the IRM. The IRMR will include a summary of the pilot testing and finalized design details for the proposed full-scale system.

6.2 System Operation, Maintenance, and Monitoring (OM&M) Plan

Upon completion of the SVE pilot test and finalization of system design, an OM&M Plan will be prepared that will describe the measures necessary to operate, monitor, and maintain the mechanical components of the proposed SVE system. The OM&M plan will include directions for typical OM&M of the proposed SVE system and an OM&M contingency plan, and will be updated periodically to reflect any Site changes.

7.0 SCHEDULE

**Table 3
Proposed Project Schedule**

Activity	Time To Complete
Building Demolition and Asbestos Abatement	September to December 2016
Submittal of Draft Remedial Investigation Work Plan (RIWP) and Fact Sheet	September 2016
Public Comment Period is Initiated	September 19, 2016
Public Comment Period Ends	October 19, 2016
NYSDEC Approves RIWP	November 30, 2016
Initial Phase of Remedial Investigation (RI) is Initiated	December 2, 2016
Initial Phase of RI is Completed	December 14, 2016
Supplemental RI (SRI) Work Plan (SRIWP) Submitted to NYSDEC	November 9, 2017
Second Phase of Remedial Investigation (RI) is Initiated	November 6, 2017
SRIWP Approved by NYSDEC	December 12, 2017
Second Phase of RI is Completed	December 12, 2017
Draft RI Report (RIR) Submitted to NYSDEC	December 30, 2017
Draft Interim Remedial Measure Work Plan (IRMWP) Submitted to NYSDEC	June 20, 2018
Final IRMWP Submitted to NYSDEC	August 2, 2018
Final RIR Submitted to NYSDEC	August 2018
RIR Approved by NYSDEC	August 2018
IRMWP Approved by NYSDEC	August 2018
IRM Implementation – Soil Vapor Extraction (SVE) System Pilot Test	August 2018
IRM Implementation – SVE System Equipment Procurement and Installation	December 2018
Soil Vapor Extraction (SVE) System Startup & Operation	January 2019 – December 2021
Draft IRM Report Submitted to NYSDEC	April 2019
Draft Remedial Action Work Plan (RAWP) Submitted to NYSDEC	March 2020
Public Comment Period for RAWP Initiated	August 2020
Public Comment Period for RAWP Ends	October/November 2020

Table 3
Proposed Project Schedule

Activity	Time To Complete
NYSDEC Approves RAWP, IRM Report, and Issues Decision Document	January 2021
Issue Remedial/Construction Notice Fact Sheet	September 2021
Site Mobilization	October 2021
Begin Redevelopment (Construction) with Implementation of RAWP	December 2021
Draft Site Management Plan (SMP) Submitted to NYSDEC	April 2022
Execution of Environmental Easement	May 2022
Draft Final Engineering Report and Fact Sheet	August 2022
Certificate of Completion and Fact Sheet	November 2022
Completion of Building	November 2024

8.0 CERTIFICATION

I, Michelle Lapin, P.E., certify that I am currently a NYS registered Professional Engineer as defined in 6 NYCRR Part 375 and that this Interim Remedial Measure Work Plan was prepared in accordance with all applicable statutes and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10).

I certify that all information and statements in this certification are true. I understand that a false statement made herein is punishable as Class “A” misdemeanor, pursuant to Section 210.45 of the Penal Law.



Michelle Lapin, P.E.


August 2, 2018

Name

Signature

Date

FIGURES

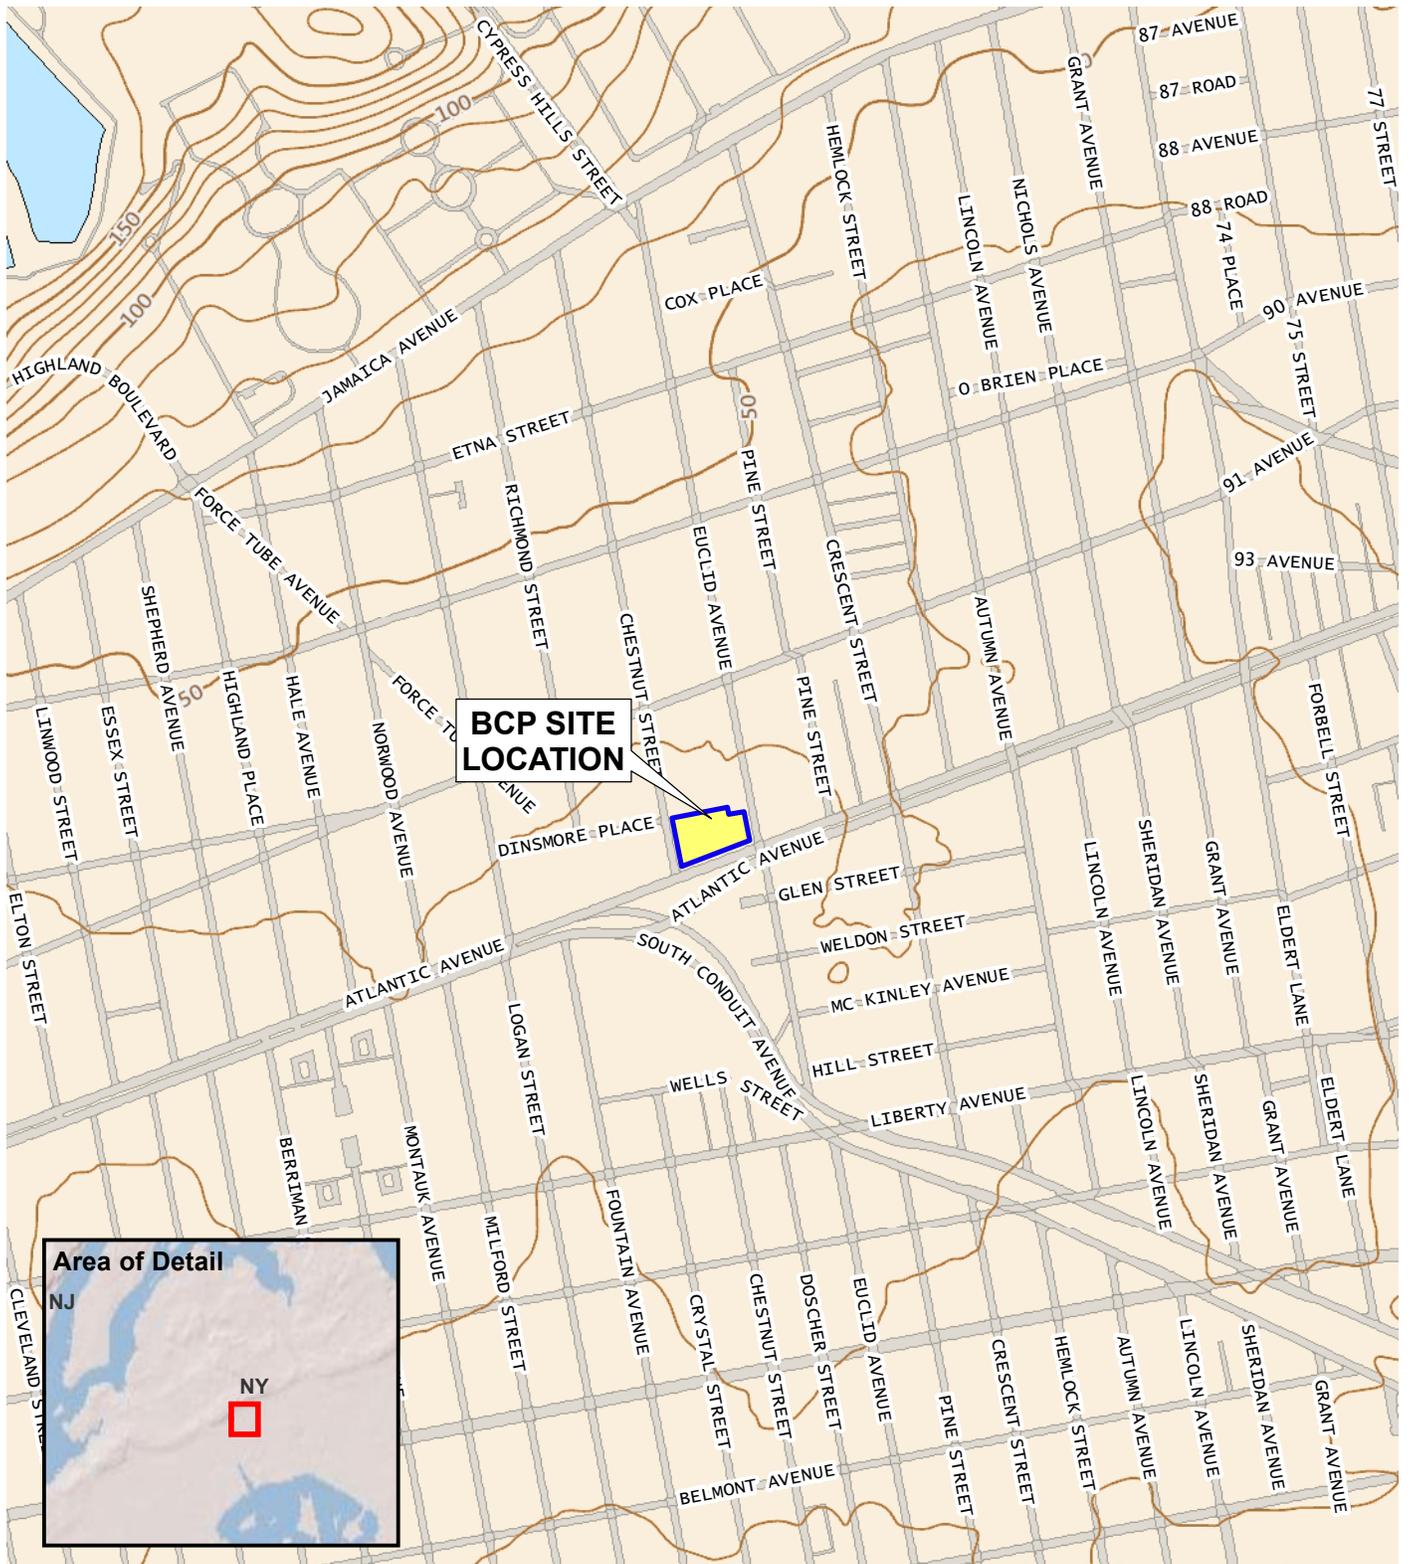

Map Source: USGS Topo base map service from The National Map



© 2018 AKRF. W:\Projects\12184 - PHIPPS.3301 ATLANTIC\Technical\GIS and Graphics\azh\mat12184.Fig.1 Site Loc Map.mxd/4/2018 7:50:43 AM mveilleux



440 Park Avenue South, New York, NY 10016

Atlantic Chestnut - Lot 3
275 Chestnut Street
 Brooklyn, New York


BROWNFIELD CLEANUP PROGRAM SITE LOCATION

DATE	6/4/2018
PROJECT NO.	12184
FIGURE	1

©2018 AKRF, Inc. W:\Projects\12184 - PHIPPS 3301 ATLANTIC\Technical\12184 - Atlantic Chestnut - Lot 3\IRM\RMW\CAD\12184 Fig 2 Site and Sample Location Plan.dwg last save: mveilleux 6/11/2018 10:57 AM



- LEGEND**
- BCP SITE BOUNDARY
 - FORMER BCP SITE BOUNDARY
 - LOT BOUNDARY
 - 4143 BLOCK NUMBER
 - FORMER BUILDING LINE
 - LIRR SUBTERRANEAN TRACKS
 - SUPPLEMENTAL REMEDIAL INVESTIGATION SOIL BORING LOCATION (2017)
 - SUPPLEMENTAL REMEDIAL INVESTIGATION SOIL BORING/NESTED GROUNDWATER MONITORING WELL LOCATION (2017)
 - ⊠ SUPPLEMENTAL REMEDIAL INVESTIGATION SOIL BORING/GROUNDWATER MONITORING WELL LOCATION (2017)
 - REMEDIAL INVESTIGATION SOIL BORING LOCATION (2016)
 - ⊠ REMEDIAL INVESTIGATION SOIL BORING/GROUNDWATER MONITORING WELL LOCATION (2016)
 - REMEDIAL INVESTIGATION TEMPORARY SOIL VAPOR POINT LOCATION (2016)
 - ⊠ REMEDIAL INVESTIGATION AMBIENT AIR SAMPLE LOCATION (2016)
 - GROUNDWATER MONITORING WELL LOCATION (INSTALLED PRIOR TO 2015)
 - ⊗ CHEMICAL OXIDATION INJECTION WELL LOCATION (INSTALLED PRIOR TO 2015)



Map Source:
- NYCDP (NYC Dept. of City Planning) GIS database.

440 Park Avenue South, New York, NY 10016

Atlantic Chestnut - Lot 3

275 Chestnut Street

Brooklyn, New York

SITE AND SAMPLE LOCATION PLAN

DATE

6/11/2018

PROJECT NO.

12184

FIGURE

2

©2018 AKRF, Inc. W:\Projects\12184 - PHPPS 3301 ATLANTIC\Technical\12184 - Atlantic Chestnut - Lot 3\RI\RI\WP\CAD\12184 - Fig 3 Soil Vapor Detections.dwg last save: mvelleux 6/13/2018 8:58 AM



Sample ID	L2-RI-SV-4 20161212
Date Sampled	12/12/2016
VOCs	µg/m ³
2-Hexanone	9.4
Acetone	127
Benzene	2.1 J
Carbon Disulfide	2.3 J
Carbon Tetrachloride	1.3
Chloroform	7.8
Cis-1,2-Dichloroethylene	19
Dichlorodifluoromethane	383
Ethanol	18 J
Ethylbenzene	3.5
Isopropanol	2.4
Methyl Ethyl Ketone (2-Butanone)	227
Methylene Chloride	8
N-Heptane	3 J
N-Hexane	13
O-Xylene (1,2-Dimethylbenzene)	4
Tetrachloroethylene (PCE)	11
Toluene	13
Trichloroethylene (TCE)	1,960 D
Trichlorofluoromethane	30
Xylenes, Total	17

Sample ID	L3-RI-SV-3 20161212
Date Sampled	12/12/2016
VOCs	µg/m ³
Acetone	85.8
Chloroform	25 J
Cis-1,2-Dichloroethylene	21 J
Dichlorodifluoromethane	71.7
Ethanol	21.5 J
Methyl Ethyl Ketone (2-Butanone)	137
Tetrachloroethylene (PCE)	46
Trichloroethylene (TCE)	4,440 D
Trichlorofluoromethane	202

Sample ID	L3-RI-SV-1 20161212
Date Sampled	12/12/2016
VOCs	µg/m ³
Acetone	134
Chloroform	32 J
Cis-1,2-Dichloroethylene	19 J
Dichlorodifluoromethane	323
Ethanol	30.3 J
Methyl Ethyl Ketone (2-Butanone)	107
Tetrachloroethylene (PCE)	12
Trichloroethylene (TCE)	4,630
Trichlorofluoromethane	65.2

Sample ID	L3-RI-SV-5 20161212
Date Sampled	12/12/2016
VOCs	µg/m ³
Acetone	73.4
Chloroform	23 J
Cis-1,2-Dichloroethylene	35
Dichlorodifluoromethane	59.8
Ethanol	29.8 J
Methyl Ethyl Ketone (2-Butanone)	92.9
Tetrachloroethylene (PCE)	101
Trichloroethylene (TCE)	7,690 D
Trichlorofluoromethane	36

Sample ID	L3-RI-SV-4 20161212
Date Sampled	12/12/2016
VOCs	µg/m ³
Acetone	67.9
Cis-1,2-Dichloroethylene	22 J
Ethanol	32.6 J
Methyl Ethyl Ketone (2-Butanone)	78.7
Tetrachloroethylene (PCE)	8,070
Trichloroethylene (TCE)	448
Trichlorofluoromethane	29

Sample ID	L3-RI-SV-6 20161212
Date Sampled	12/12/2016
VOCs	µg/m ³
2-Hexanone	11 J
Acetone	227
Carbon Disulfide	7.2 J
Chloroform	52.3
Cis-1,2-Dichloroethylene	1,150
Ethanol	45.2
Methyl Ethyl Ketone (2-Butanone)	413
Methylene Chloride	7.6 J
M,P-Xylenes	8.7 J
N-Heptane	9.8 J
N-Hexane	21
Tetrachloroethylene (PCE)	25
Toluene	14 J
Trans-1,2-Dichloroethene	147
Trichloroethylene (TCE)	4,280
Xylenes, Total	8.7 J

Sample ID	L3-RI-SV-2 20161212
Date Sampled	12/12/2016
VOCs	µg/m ³
Acetone	64.1
Chloroform	15 J
Cis-1,2-Dichloroethylene	9.1 J
Dichlorodifluoromethane	79.6
Ethanol	26.9
Methyl Ethyl Ketone (2-Butanone)	89.4
Tetrachloroethylene (PCE)	27
Toluene	10 J
Trichloroethylene (TCE)	3,230
Trichlorofluoromethane	71.4


LEGEND

- BCP SITE BOUNDARY
- - - FORMER BCP SITE BOUNDARY
- 3 LOT BOUNDARY
- 4143 BLOCK NUMBER
- FORMER BUILDING LINE
- - - LIRR SUBTERRANEAN TRACKS
- APPROXIMATE EXTENT OF FORMER PARTIAL CELLAR
- REMEDIAL INVESTIGATION TEMPORARY SOIL VAPOR POINT LOCATION (2016)

Sample ID	L2-RI-SV-4 20161212
Date Sampled	12/12/2016
VOCs	µg/m ³
2-Hexanone	9.4
Acetone	127
Benzene	2.1 J
Carbon Disulfide	2.3 J

Sample ID
Sample Date
Concentration in Soil Vapor
Analyte/Compound in Soil Vapor

µg/m³ : micrograms per cubic meter
 J : The reported concentration is estimated and may be inaccurate or imprecise.
 D : The reported concentration is the result of a diluted analysis.

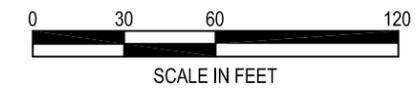

AKRF
440 Park Avenue South, New York, NY 10016

Atlantic Chestnut - Lot 3
275 Chestnut Street
Brooklyn, New York

SOIL VAPOR DETECTIONS

DATE
6/13/2018

PROJECT NO.
12184


FIGURE
3

©2018 AKRF, Inc. W:\Projects\12184 - PHIPPS 3301 ATLANTIC\Technical\12184 - Atlantic Chestnut - Lot 3\IRM\RM\PCAD\12184 Figs 4,5,6 SVE Well Figures.dwg last save: mvelieux 6/13/2018 9:18 AM



LEGEND

- BCP SITE BOUNDARY
- - - FORMER BCP SITE BOUNDARY
- 3 LOT BOUNDARY
- 4143 BLOCK NUMBER
- FORMER BUILDING LINE
- - - LIRR SUBTERRANEAN TRACKS
- SUPPLEMENTAL REMEDIAL INVESTIGATION SOIL BORING LOCATION (2017)
- ⊙ SUPPLEMENTAL REMEDIAL INVESTIGATION SOIL BORING/NESTED GROUNDWATER MONITORING WELL LOCATION (2017)
- ⊗ SUPPLEMENTAL REMEDIAL INVESTIGATION SOIL BORING/GROUNDWATER MONITORING WELL LOCATION (2017)
- REMEDIAL INVESTIGATION SOIL BORING LOCATION (2016)
- ⊕ REMEDIAL INVESTIGATION SOIL BORING/GROUNDWATER MONITORING WELL LOCATION (2016)
- REMEDIAL INVESTIGATION TEMPORARY SOIL VAPOR POINT LOCATION (2016)
- ⊕ REMEDIAL INVESTIGATION AMBIENT AIR SAMPLE LOCATION (2016)
- ⊙ GROUNDWATER MONITORING WELL LOCATION (INSTALLED PRIOR TO 2015)
- ⊗ CHEMICAL OXIDATION INJECTION WELL LOCATION (INSTALLED PRIOR TO 2015)
- ⊕ PROPOSED INTERIM REMEDIAL MEASURE SOIL VAPOR EXTRACTION PILOT TEST WELL LOCATION WITH 40' RADIUS OF INFLUENCE
- ✖ PROPOSED VAPOR MONITORING POINT



Map Source:
- NYCDP (NYC Dept. of City Planning) GIS database.




440 Park Avenue South, New York, NY 10016

Atlantic Chestnut - Lot 3
275 Chestnut Street
Brooklyn, New York

PROPOSED SOIL VAPOR EXTRACTION (SVE) PILOT TEST PLAN

DATE	6/13/2018
PROJECT NO.	12184
FIGURE	4

©2018 AKRE, Inc. W:\Projects\12184 - PHIPPS 3301 ATLANTIC\Technical\12184 - Atlantic Chestnut - Lot 3\IRM\RMWPCAD\12184 Figs 4.5.6 SVE Well Figures.dwg last save: mveilleux 6/13/2018 9:42 AM

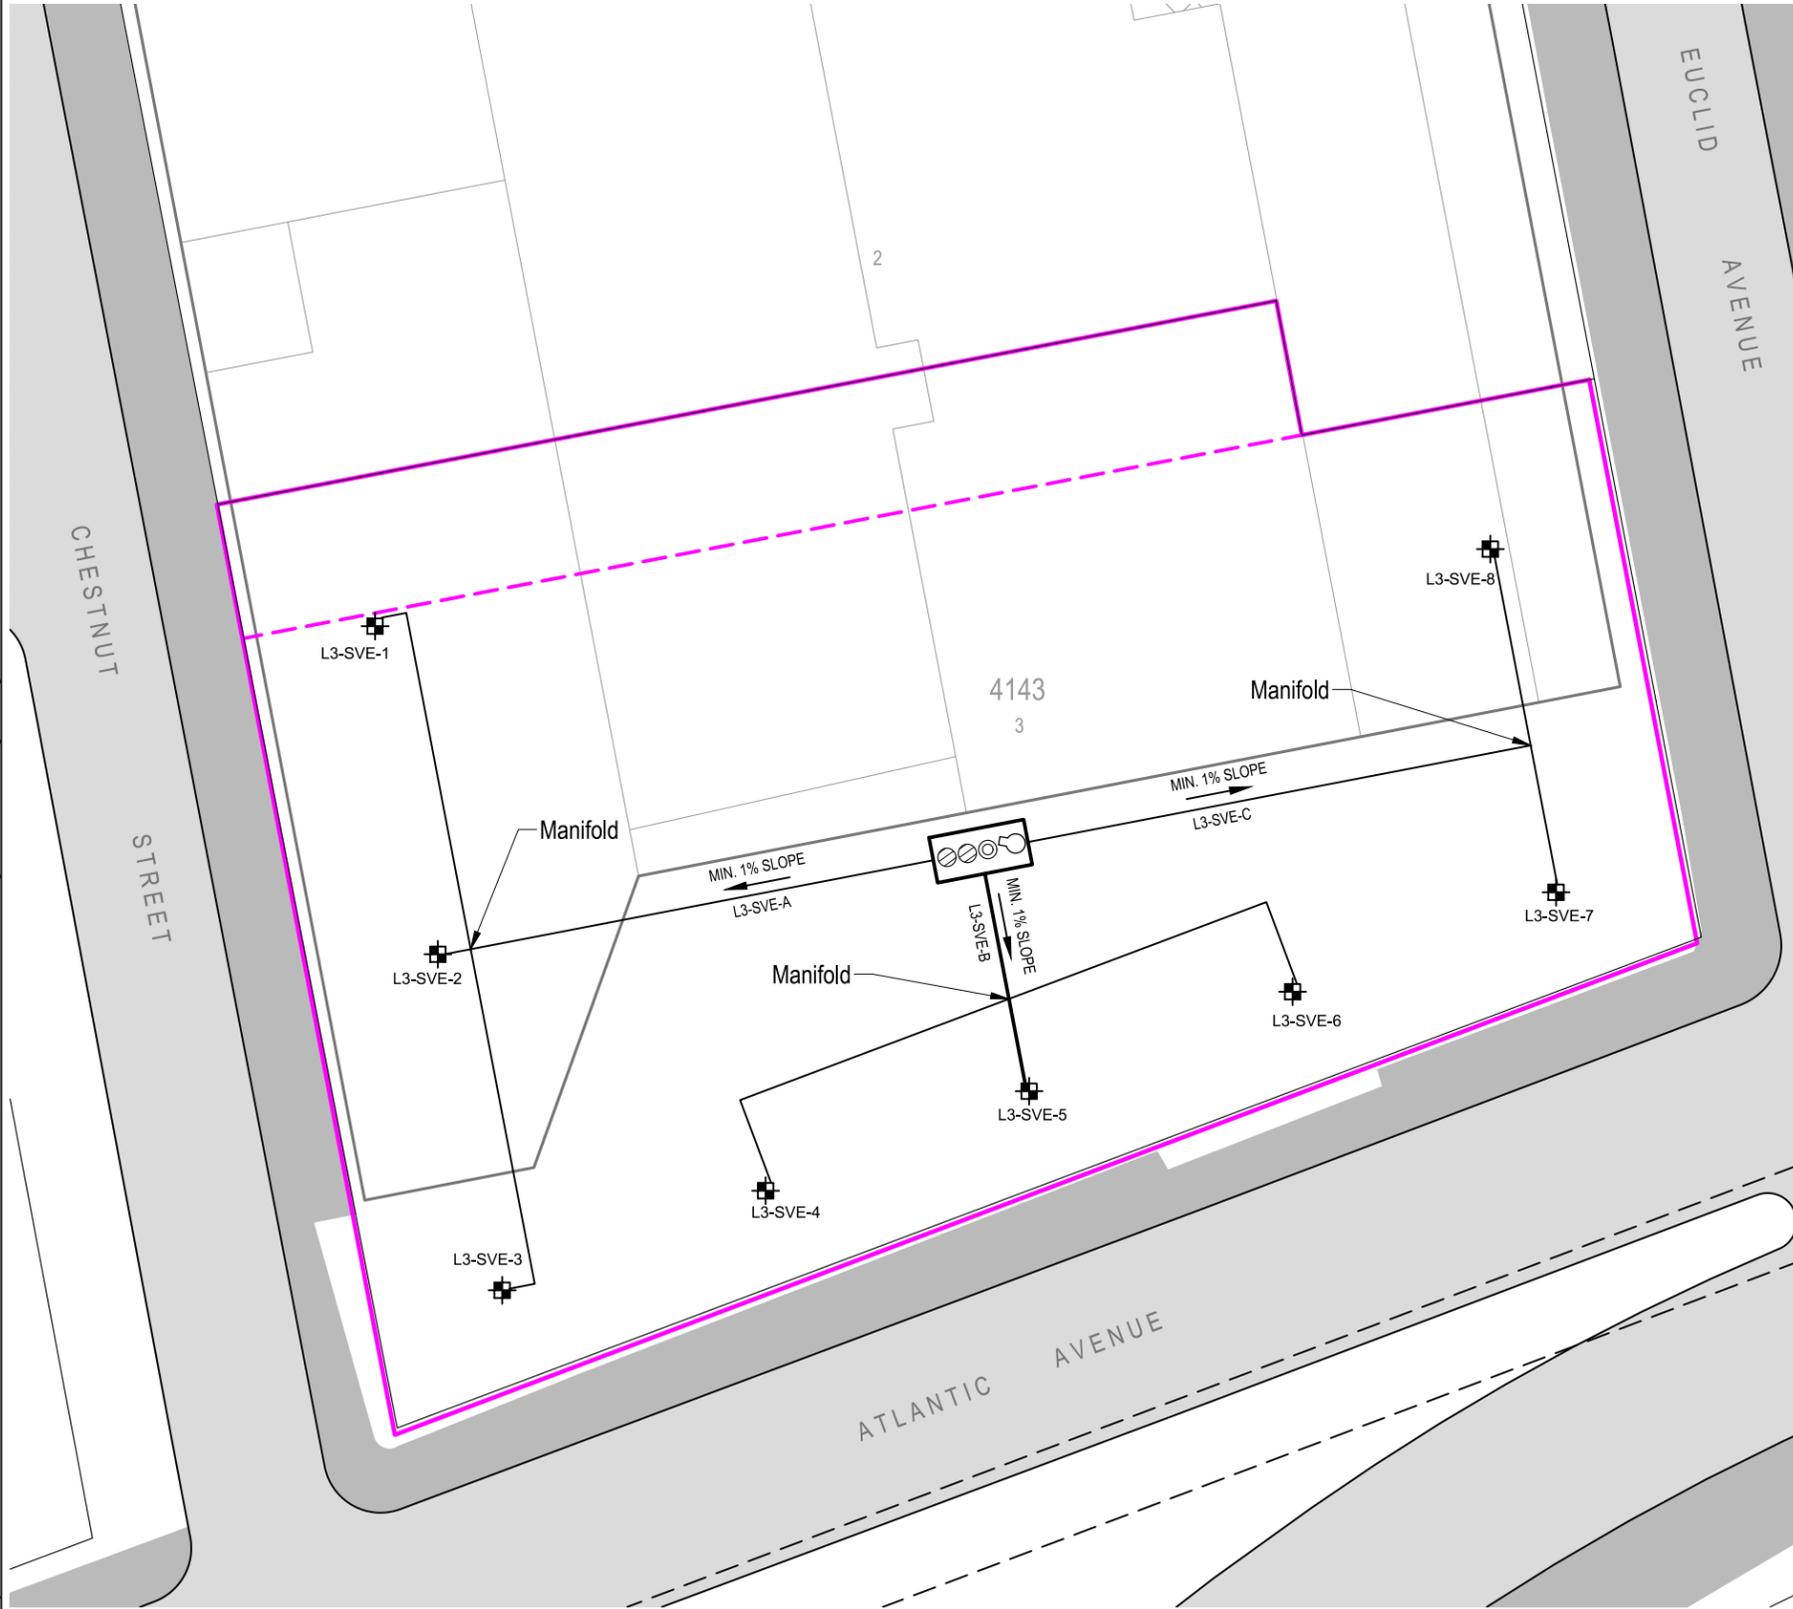

- LEGEND**
- BCP SITE BOUNDARY
 - FORMER BCP SITE BOUNDARY
 - 3 LOT BOUNDARY
 - 4143 BLOCK NUMBER
 - FORMER BUILDING LINE
 - LIRR SUBTERRANEAN TRACKS
 - + PROPOSED SOIL VAPOR EXTRACTION WELL LOCATION
 - PROPOSED SOIL VAPOR EXTRACTION SYSTEM SHED WITH CONTROL PANEL AND EXHAUST STACK
 - B BLOWER
 - G GRANULAR ACTIVATED CARBON UNIT
 - M MOISTURE KNOCK OUT DRUM
 - SCHEDULE 40 SOLID PVC PIPING (MIN. 1% SLOPE TOWARDS SVE WELLS)

NOTE: SVE SYSTEM ACCESSORIES (VACUUM GAUGES, FLOW METER, DILUTION VALVE, ETC) LOCATED IN SHED NOT SHOWN (SEE FIGURE 7).



Map Source:
- NYCDP (NYC Dept. of City Planning) GIS database.

Atlantic Chestnut - Lot 3
275 Chestnut Street
Brooklyn, New York


PROPOSED SOIL VAPOR EXTRACTION (SVE) SYSTEM PLAN

DATE
6/13/2018

PROJECT NO.
12184

FIGURE
6

©2018 AKRF, Inc. W:\Projects\12184 - P\PPS 3301 ATLANTIC\Technical\12184 - Atlantic Chestnut - Lot 3\IRM\RMW\PCAD\12184 Fig 7 SVE P&ID.dwg last save: mveilleux 6/20/2018 4:18 PM

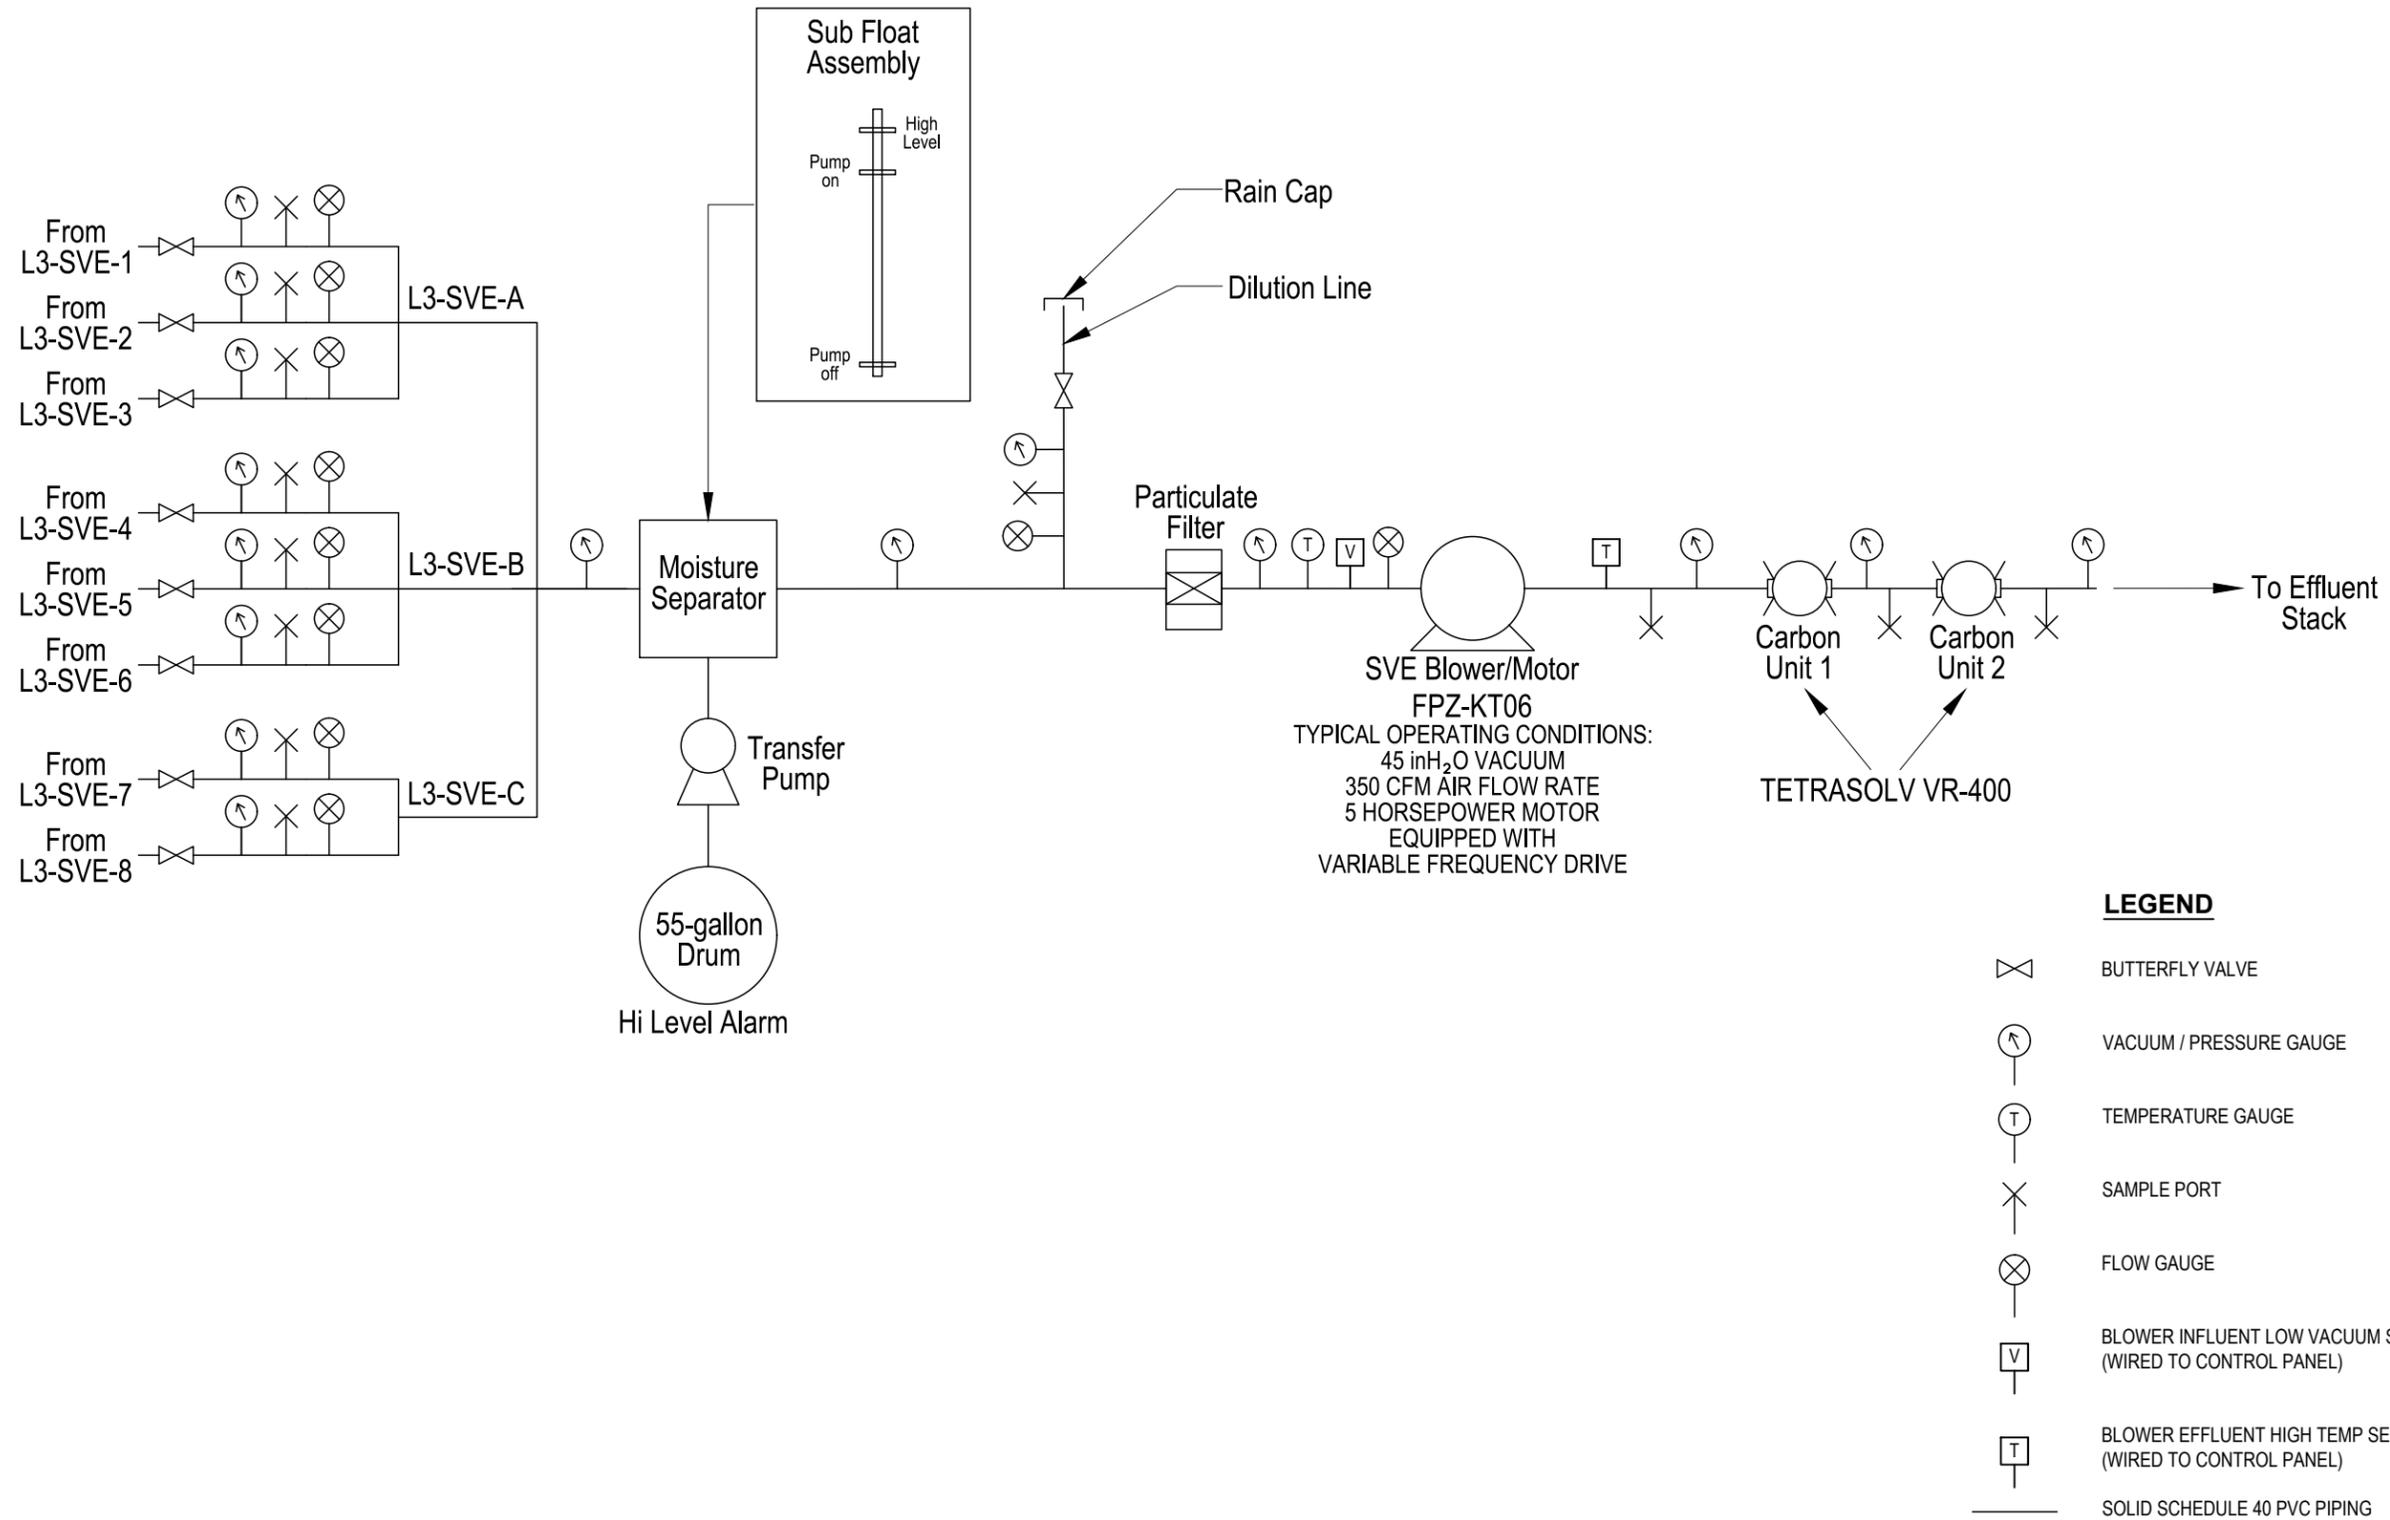

Atlantic Chestnut - Lot 3
275 Chestnut Street
Brooklyn, New York

**PROPOSED SOIL VAPOR EXTRACTION SYSTEM
PROCESS AND INSTRUMENTATION DIAGRAM**

DATE
6/20/2018

PROJECT NO.
12184

FIGURE
7

APPENDIX A
HEALTH AND SAFETY PLAN (HASP) AND
COMMUNITY AIR MONITORING PLAN (CAMP)

**ATLANTIC CHESTNUT – LOT 3
275 CHESTNUT STREET
BROOKLYN, NEW YORK**

**Health and Safety Plan and Community Air
Monitoring Plan**

**AKRF Project Number: 12184
BCP Site Number: C224236**

Prepared for:

NYSDEC Region 2
1 Hunter's Point Plaza
47-40 21st Street
Long Island City, New York 11101

On Behalf Of:

Atlantic Chestnut Affordable Housing LLC
902 Broadway, 13th Floor
New York, New York 10010

Prepared by:



AKRF, Inc.
440 Park Avenue South
New York, New York 10016
(212) 696-0670

JUNE 2018

TABLE OF CONTENTS

1.0 INTRODUCTION 1
2.0 HEALTH AND SAFETY GUIDELINES AND PROCEDURES..... 2
 2.1 Hazard Evaluation 2
 2.1.1 Hazards of Concern..... 2
 2.1.2 Physical Characteristics..... 2
 2.1.3 Hazardous Materials..... 2
 2.1.4 Chemicals of Concern 2
 2.2 Designated Personnel 3
 2.3 Training 4
 2.4 Medical Surveillance Program 4
 2.5 Site Work Zones 4
 2.6 Air Monitoring Program..... 5
 2.6.1 Work Zone Air Monitoring..... 5
 2.6.2 Community Air Monitoring Plan 5
 2.6.2.1. Roving Air Monitoring 6
 2.6.3 Personal Protection Equipment (PPE)..... 6
 2.7 General Work Practices 7
3.0 EMERGENCY PROCEDURES AND EMERGENCY RESPONSE PLAN..... 7
 3.1 Hospital Directions 8
 3.2 Emergency Contacts 8
4.0 APPROVAL & ACKNOWLEDGMENTS OF HASP 9

FIGURE

- Figure 1 – BCP Site Location Map
- Figure 2 – Hospital Location Map

TABLES

- Table 1 – Chemicals of Concern
- Table 2 – Site Work Zones
- Table 3 – Work Zone Air Monitoring Action Levels
- Table 4 – Personal Protection Equipment (PPE) Requirements
- Table 5 – Hospital Directions
- Table 6 – Emergency Contacts

APPENDICES

- Attachment A – Potential Health Effects from On-Site Contaminants
- Attachment B – West Nile Virus/St. Louis Encephalitis Prevention
- Attachment C – Report Forms
- Attachment D – Emergency Hand Signals

1.0 INTRODUCTION

This Health and Safety Plan (HASP) and Community Air Monitoring Plan (CAMP) were prepared by AKRF, Inc. (AKRF) on behalf of Atlantic Chestnut Affordable Housing LLC (the Volunteer) for the Atlantic Chestnut – Lot 3 site, located at 275 Chestnut Street in Brooklyn, New York, hereafter referred to as the “Site”. The Site is identified on the New York City Tax Map as Brooklyn Tax Block 4143, Lot 3. Historically, Lot 1 encompassed the entirety of Block 4143, but was apportioned into three lots (Lots 1, 2, and 3) in 2016. A Site Location Map is provided as Figure 1.

The Site is composed of a concrete-paved vacant lot with a former loading dock.. The Site formerly consisted of a series of vacant, interconnected, fire-damaged factory buildings that were demolished between July and December 2016.

The surrounding area is developed primarily with residential, commercial, manufacturing, transportation, and industrial uses. The elevated J and Z Metropolitan Transit Authority (MTA) subway tracks run along Fulton Street to the north and the Long Island Railroad (LIRR) tracks are located beneath Atlantic Avenue to the south. The surrounding area is developed primarily with residential, commercial, religious, manufacturing, transportation, and industrial uses.

Historic records indicated that the Site was developed with residences and a road in 1887 and with industrial and manufacturing uses, including the Columbia Machine Works and Malleable Iron Company, the Columbia Cable and Electric Corporation, Blue Ridge Farms, Inc., and Chloe Foods Corp. between 1908 and 2012. Blue Ridge Farms, Inc. and Chloe Foods Corp. are listed on multiple federal and state databases. Prior uses that appear to have led to Site contamination include blacksmithing and stamping, a brass foundry, woodworking, a blacksmith, a machine shop, tank and engine rooms, an iron works, wire braiding, and cable manufacturing. The Site has been vacant since a July 2012 fire caused severe structural damage to the former Site buildings, which were demolished between July and December 2016.

Site contamination, present in shallow and deep soil, shallow and intermediate groundwater, and soil vapor across the Site, appears to be related to the Site’s historic industrial and manufacturing uses. The elevated detections of semivolatile organic compounds (SVOCs) and metals in shallow fill are most likely attributable to historic filling, undocumented discharges due to the fire in 2012, and/or historic operations at the Site. The presence of petroleum-related compounds in soil and soil vapor, associated with NYSDEC Spill No. 1708008, are related to former and/or current on-site petroleum storage tanks. The presence of the solvent-related volatile organic compounds (VOCs) trichloroethylene (TCE) (in soil, groundwater, and soil vapor), tetrachloroethylene (PCE) (in soil, groundwater and soil vapor), cis-1,2-dichloroethylene (cis-1,2-DCE), and trans-1,2-dichloroethylene (trans-1,2-DCE) (in soil), chloroform (in groundwater), and carbon tetrachloride and refrigerants (in soil vapor) are likely related to the historic manufacturing operations at the Site. Based on groundwater flow, the contaminants in shallow groundwater are likely migrating off-site to the south. Additionally, when organic compounds are exposed to air, contamination can partition from soil and groundwater and migrate in a vapor phase through the pore spaces in unsaturated soil. The vapors can accumulate beneath structures such as pavement and building foundations. The affected media for the existing or potential future releases at the Site include soil, groundwater, and soil vapor.

2.0 HEALTH AND SAFETY GUIDELINES AND PROCEDURES

2.1 Hazard Evaluation

2.1.1 Hazards of Concern

The hazards of concern include organic and inorganic chemicals, heat and cold stress, and explosive/flammable materials.

2.1.2 Physical Characteristics

The physical characteristics of the hazards of concern include liquid, solid, sludge, and vapor.

2.1.3 Hazardous Materials

The chemicals known and/or expected to be encountered at the Site include: VOCs, SVOCs, pesticides, petroleum, and metals; the solids include ash, asbestos, and historical fill; the solvents include chlorinated solvents; and the oils include hydraulic oil, gasoline, and fuel oil.

2.1.4 Chemicals of Concern

Table 1
Chemicals Of Concern

Chemicals	REL/PEL/STEL (ppm)	Health Hazards
Arsenic	REL = 0.002 mg/m ³ PEL = 0.01 mg/m ³	Ulceration of nasal septum, dermatitis, gastrointestinal disturbances, peripheral neuropathy, respiratory irritation, hyperpigmentation of skin; potential occupational carcinogen.
Benzene	REL = 0.1 ppm PEL = 1 ppm STEL = 5 ppm	Irritation eyes, skin, nose, respiratory system; dizziness; headache, nausea, staggered gait; anorexia, lassitude, dermatitis; bone marrow depression, potential occupational carcinogen.
Copper	REL = 0.1 mg/m ³ PEL = 0.1 mg/m ³	Irritation eyes, upper respiratory system; metal fume fever: chills, muscle ache, nausea, fever, dry throat, cough, lassitude (weakness, exhaustion); metallic or sweet taste; discoloration skin, hair.
Ethylbenzene	REL = 100 ppm PEL = 100 ppm	Irritation eyes, skin, mucous membrane; headache; dermatitis; narcosis, coma.
Fuel Oil	REL = 350 mg/m ³ PEL = 400 ppm	Nausea, irritation – eyes, hypertension, headache, light-headedness, loss of appetite, poor coordination; long-term exposure – kidney damage, blood clotting problems; potential carcinogen.
Chromium	REL = 0.5 mg/m ³ PEL = 0.5 mg/m ³	Irritation eyes; sensitization dermatitis.
Lead	REL = 0.05 mg/m ³ PEL = 0.05 mg/m ³	Lassitude (weakness, exhaustion), insomnia; facial pallor; anorexia, weight loss, malnutrition; constipation, abdominal pain, colic; anemia; gingival lead line; tremor; paralysis wrist, ankles; encephalopathy; kidney disease; irritation eyes; hypertension.
Mercury	REL = 0.1 mg/m ³	Irritation eyes, skin; cough, chest pain, dyspnea

Table 1
Chemicals Of Concern

Chemicals	REL/PEL/STEL (ppm)	Health Hazards
	PEL = 0.05 mg/m ³	(breathing difficulty), bronchitis, pneumonitis; tremor, insomnia, irritability, indecision, headache, lassitude (weakness, exhaustion); stomatitis, salivation; gastrointestinal disturbance, anorexia, weight loss; proteinuria.
Polycyclic Aromatic Hydrocarbons (PAHs)	PEL = 5 mg/m ³	Harmful effects to skin, bodily fluids, and ability to fight disease, reproductive problems; [potential occupational carcinogen].
Trichloroethylene (TCE)	PEL = 100 ppm	Lassitude (weakness, exhaustion), dizziness, tremor, drowsiness, nausea, vomiting; dermatitis; cardiac arrhythmias, paresthesia; liver injury; [potential occupational carcinogen].
Tetrachloroethylene (PCE)	PEL = 100 ppm STEL = 200 ppm	Irritation eyes, skin, nose, throat, respiratory system; nausea; flush face, neck; dizziness, poor coordination; headache, drowsiness; skin erythema (skin redness); liver damage; potential occupational carcinogen.
Toluene	REL = 100 ppm PEL = 200 ppm STEL = 300 ppm	Irritation eyes, nose; lassitude, confusion, euphoria, dizziness, headache; dilated pupils, lacrimation (discharge of tears); anxiety, muscle fatigue, insomnia; paresthesia (skin tingling or numbness); dermatitis; liver, kidney damage.
Xylenes	REL = 100 ppm PEL = 100 ppm	Irritation eyes, skin, nose, throat; dizziness, excitement, drowsiness, poor coordination, staggering gait; corneal vacuolization; anorexia, nausea, vomiting, abdominal pain; dermatitis.
Zinc	REL = 5 mg/m ³ PEL = 5 mg/m ³	Metal fume fever: chills, muscle ache, nausea, fever, dry throat, cough; lassitude (weakness, exhaustion); metallic taste; headache; blurred vision; low back pain; vomiting; malaise (vague feeling of discomfort); chest tightness; dyspnea (breathing difficulty), rales, decreased pulmonary function.
Particulates	PEL = 15 mg/m ³ (total) PEL = 5 mg/m ³ (respirable)	Irritation eyes, skin, throat, upper respiratory system.
Notes: REL = National Institute for Occupational Safety and Health (NIOSH) Recommended Exposure Limit PEL = OSHA Permissible Exposure Limit STEL = OSHA Short Term Exposure Limit		

2.2 Designated Personnel

AKRF will appoint one of its on-site personnel as the Site Safety Officer (SSO). This individual will be responsible for the implementation of this HASP. The SSO will have a 4-year college degree in occupational safety or a related science/engineering field, and experience in implementation of air monitoring and hazardous materials sampling programs. Health and safety training required for the SSO and all field personnel is outlined in Section 1.3 of this HASP.

2.3 Training

All personnel who enter the work area while intrusive activities are being performed will have completed a 40-hour training course that meets OSHA requirements of 29 CFR Part 1910, Occupational Safety and Health Standards. In addition, all personnel will have up-to-date 8-hour refresher training. The training will allow personnel to recognize and understand the potential hazards to health and safety. All field personnel must attend a training program, whose purpose is to:

- Make them aware of the potential hazards they may encounter;
- Provide the knowledge and skills necessary for them to perform the work with minimal risk to health and safety;
- Make them aware of the purpose and limitations of safety equipment; and
- Ensure that they can safely avoid or escape from emergencies.

Each member of the field crew will be instructed in these objectives before he/she goes onto the Site. A Site safety meeting will be conducted at the start of the project. Additional meetings shall be conducted, as necessary, for new personnel working at the Site.

2.4 Medical Surveillance Program

All AKRF and subcontractor personnel performing field work involving subsurface disturbance at the Site are required to have passed a complete medical surveillance examination in accordance with 29 CFR 1910.120 (f). A physician's medical release for work will be confirmed by the SSO before an employee can begin Site activities. The medical release shall consider the type of work to be performed and the required personal protective equipment (PPE). The medical examination will, at a minimum, be provided annually and upon termination of hazardous waste Site work.

2.5 Site Work Zones

During any activities involving subsurface disturbance, the work area must be divided into various zones to prevent the spread of contamination, ensure that proper protective equipment is donned, and provide an area for decontamination.

The Exclusion Zone is defined as the area where exposure to contaminated media could be encountered. The Contamination Reduction Zone (CRZ) is the area where decontamination procedures take place and is located next to the Exclusion Zone. The Support Zone is the area where support facilities such as vehicles, fire extinguisher, and first aid supplies are located. The emergency staging area (part of the Support Zone) is the area where all workers on-site would assemble in the event of an emergency. A summary of these areas is provided below. These zones may be changed by the SSO, depending on that day's activities. All field personnel will be informed of the location of these zones before work begins.

Table 2
Site Work Zones

Task	Exclusion Zone	CRZ	Support Zone
SVE Well and VMP Installation	15 feet from drill rig	15 feet from drill rig	As Needed

2.6 Air Monitoring Program

The purpose of the air monitoring program is to identify any exposure of the field personnel to potential environmental hazards in the soil and soil vapor. Results of the air monitoring will be used to determine the appropriate response action, if needed.

2.6.1 Work Zone Air Monitoring

Real time air monitoring of VOCs and particulates will be performed in the work zone during all intrusive Site activities. Work zone air monitoring for VOCs will be performed with a photoionization detector (PID). The PID will be calibrated with 100 parts per million (ppm) isobutylene standard in accordance with the manufacturer's instructions at the start of each work day. Work zone air monitoring for particulates will be conducted using a MIE 1000 Personal DataRam or equivalent to measure the concentration of airborne respirable particulates less than 10 micrometers in size (PM₁₀).

The SSO shall set up the equipment and confirm that it is working properly. His/her designee may oversee the air measurements during the day. Measurements will be taken prior to commencement of work and continuously during the work. Measurements will be made as close to the workers as practicable and at the breathing height of the workers. The action levels and required responses are listed in the following table:

Table 3
Work Zone Air Monitoring Action Levels

Instrument	Action Level	Response Action
PID	Less than 10 ppm in breathing zone	Level D or D-Modified
	Between 10 ppm and 50 ppm	Level C
	More than 50 ppm	Stop work. Resume work when readings are less than 50 ppm
Particulate Monitor (MIE 1000 Personal DataRam™ or equivalent)	Less than 1.25 µg/m ³ above background in breathing zone	Level D or D-Modified
	More than 1.25 µg/m ³ above background in breathing zone	Stop work. Resume work when readings are less than 1.25 µg/m ³ .
Notes: µg/m ³ = micrograms per cubic meter; ppm = parts per million		

2.6.2 Community Air Monitoring Plan

Community air monitoring will be conducted during all intrusive Site activities in compliance with the New York State Department of Health (NYSDOH) Generic Community Air Monitoring Plan (CAMP). Real-time air monitoring for volatile

compounds and dust at the perimeter of the exclusion zone will be performed as described below.

2.6.2.1. Roving Air Monitoring

VOC Monitoring

Periodic monitoring for VOCs will be conducted during non-intrusive activities such as the collection of excavation endpoint soil samples. Periodic monitoring may include obtaining measurements upon arrival at a location and upon leaving the location.

Continuous monitoring for VOCs will be conducted during all ground intrusive activities, including excavation and tank removal (if any) activities. Upwind concentrations will be measured at the start of each workday and periodically thereafter to establish background concentrations. VOCs will be monitored continuously at the downwind perimeter of the exclusion zone. Monitoring will be conducted with a PID equipped with an 11.7 eV lamp capable of calculating 15-minute running average concentrations.

More frequent intervals of monitoring will be conducted if required as determined by the SSO. All PID readings will be recorded and available for NYSDEC and NYSDOH personnel to review. Instantaneous readings, if any, will also be recorded.

Particulate Monitoring

Continuous monitoring for particulates will be conducted during all ground intrusive activities, which will involve the measurement of respirable dust. Community air monitoring for dust particulates will be conducted using a MIE 1000 Personal DataRam or equivalent to measure the concentration of airborne respirable particulates less than 10 micrometers in size (PM₁₀). The particulate monitor will be capable of calculating 15-minute running average concentrations and equipped with an audible alarm to indicate exceedance of action levels. Background readings and any readings that trigger response actions will be recorded in the project logbook, which will be available on site for NYSDOH and/or NYSDEC review.

2.6.3 Personal Protection Equipment (PPE)

The PPE required for various kinds of Site investigation tasks are based on 29 CFR 1910.120, Hazardous Waste Operations and Emergency Response, Appendix B, “General Description and Discussion of the Levels of Protection and Protective Gear.”

AKRF field personnel and other Site personnel shall wear, at a minimum, Level D PPE. The protection will be based on the air monitoring described in this section.

Table 4
Personal Protection Equipment Requirements

LEVEL OF PROTECTION & PPE		All Tasks
Level D <input checked="" type="checkbox"/> Steel Toe Shoes <input checked="" type="checkbox"/> Hard Hat (within 25 ft. of excavator) <input checked="" type="checkbox"/> Work Gloves	<input checked="" type="checkbox"/> Safety Glasses <input type="checkbox"/> Face Shield <input checked="" type="checkbox"/> Ear Plugs (within 25 ft. of excavator) <input checked="" type="checkbox"/> Nitrile Gloves <input checked="" type="checkbox"/> Tyvek for tank contractor if NAPL present	Yes
Level C (in addition to Level D) <input checked="" type="checkbox"/> Half-Face Respirator <input checked="" type="checkbox"/> Full Face Respirator <input type="checkbox"/> Full-Face PAPR	<input type="checkbox"/> Particulate Cartridge <input type="checkbox"/> Organic Cartridge <input checked="" type="checkbox"/> Dual Organic/Particulate Cartridge	If PID > 10 ppm or particulate > 5 µg/m ³ in breathing zone
Comments: Cartridges to be changed out at least once per shift unless warranted beforehand (e.g., more difficult to breath or any odors detected). PAPR = powered air purifying respirator		

2.7 General Work Practices

To protect health and safety, all field personnel will adhere to the guidelines listed below during activities involving subsurface disturbance:

- Eating, drinking, chewing gum or tobacco, and smoking are prohibited except in designated areas on the Site. These areas will be designated by the SSO.
- Workers must wash their hands thoroughly on leaving the work area and before eating, drinking, or any other such activity.
- The workers should shower as soon as possible after leaving the Site. Contact with contaminated or suspected surfaces should be avoided.
- The buddy system should always be used; each buddy should watch for signs of fatigue, exposure, and heat/cold stress.

3.0 EMERGENCY PROCEDURES AND EMERGENCY RESPONSE PLAN

The field crew will be equipped with emergency equipment, such as a first aid kit and disposable eyewashes. In the case of a medical emergency, the SSO will determine the nature of the emergency and he/she will have someone call for an ambulance, if needed. If the nature of the injury is not serious, i.e., the person can be moved without expert emergency medical personnel, he/she should be driven to the Brookdale University Hospital by on-site personnel. Directions to the hospital are provided below, and a hospital route map is provided as Figure 2.

3.1 Hospital Directions

**Table 5
Hospital Directions**

Hospital Name	Brookdale University Hospital
Phone Number	(718) 240-5363
Address/Location	1 Brookdale Plaza, Brooklyn, New York 11212
Directions	<ol style="list-style-type: none"> 1. Exit through the gate on the southern portion of the Site. Turn right onto Atlantic Avenue. 2. Turn left onto Miller Avenue. 3. Turn right onto Glenmore Avenue. 4. Turn left onto Granville Payne/Pennsylvania Avenue. 5. Turn right onto New Lots Avenue. 6. Turn left onto Hinsdale Street. 7. Turn right onto Linden Boulevard. 8. Keep left to stay on Linden Boulevard. 9. Turn right onto Rockaway Parkway. 10. The destination will be on the right.

3.2 Emergency Contacts

**Table 6
Emergency Contacts**

Company	Individual Name	Title	Contact Number
AKRF	Michelle Lapin, P.E.	Remedial Engineer	646-388-9520 (office)
	Deborah Shapiro, QEP	Project Manager and Project Director	646-388-9544 (office)
	Amy Jordan	Deputy Project Manager	646-388-9864 (office)
	George Kokaliaris	Site Safety Officer (SSO)	440-867-8810 (cell)
	Victor Chang	Alternate SSO	718-864-6329
Atlantic Chestnut Affordable Housing LLC	Michael Wadman	Client Representative	646-388-8216
Ambulance, Fire Department, & Police Department	-	-	911
NYSDEC Spill Hotline	-	-	800-457-7362

4.0 APPROVAL & ACKNOWLEDGMENTS OF HASP

Signed: _____ Date: _____
AKRF Project Manager

Signed: _____ Date: _____
AKRF Health and Safety Officer

Below is an affidavit that must be signed by all workers who enter the site. A copy of the HASP must be on-site at all times and will be kept by the SSO.

AFFIDAVIT

I, _____ (name), of _____ (company name), have read the HASP for the Atlantic Chestnut – Lot 3 Site located at 275 Chestnut Street in Brooklyn, New York. I agree to conduct all on-site work in accordance with the requirements set forth in this HASP and understand that failure to comply with this HASP could lead to my removal from the Site.

Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____

ATTACHMENT A
POTENTIAL HEALTH EFFECTS FROM ON-SITE CONTAMINANTS

This fact sheet answers the most frequently asked health questions (FAQs) about copper. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It is important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Copper is a reddish metal that occurs naturally in the environment. It also occurs naturally in plants and animals. Low levels of copper are essential for maintaining good health. High levels can cause harmful effects such as irritation of the nose, mouth and eyes, vomiting, diarrhea, stomach cramps, and nausea. Copper has been found in at least 884 of the 1,613 National Priorities List sites identified by the Environmental Protection Agency (EPA).

What is copper?

Copper is a reddish metal that occurs naturally in rocks, soil, water, and air. Copper also occurs naturally in plants and animals.

Metallic copper can be easily molded or shaped. Metallic copper can be found in the U.S. penny, electrical wiring, and some water pipes. Metallic copper is also found in mixtures (called alloys) with other metals such as brass and bronze. Copper is also found as part of other compounds forming salts. Copper salts occur naturally, but are also manufactured. The most common copper salt is copper sulfate. Most copper compounds are blue-green in color. Copper compounds are commonly used in agriculture to treat plant diseases like mildew, for water treatment and, as preservatives for wood, leather, and fabrics.

What happens to copper when it enters the environment?

- Copper can enter the environment from the mining of copper and other metals and from factories that make or use metallic copper or copper compounds.
- It can also enter the environment through domestic waste water, combustion of fossil fuels and wastes, wood production, phosphate fertilizer production, and natural sources (e.g., windblown dust from soils, volcanoes, decaying vegetation, forest fires, and sea spray).
- Copper in soil strongly attaches to organic material and minerals.

- Copper that dissolves in water becomes rapidly bound to particles suspended in the water.
- Copper does not typically enter groundwater.
- Copper carried by particles emitted from smelters and ore processing plants is carried back to the ground by gravity or in rain or snow.
- Copper does not break down in the environment.

How might I be exposed to copper?

- Breathing air, drinking water, eating food, and by skin contact with soil, water, or other copper-containing substances.
- Some copper in the environment can be taken up by plants and animals.
- Higher exposure may occur if your water is corrosive and you have copper plumbing and brass water fixtures. You may be exposed to higher amounts of copper if you drink water or swim in lakes or reservoirs recently treated with copper to control algae or receive cooling water from a power plant that may have high amounts of dissolved copper.
- Using some garden products (e.g., fungicides) to control plant diseases.
- Living near bronze and brass production facilities may expose you to higher copper levels in soil.
- You may breathe copper-containing dust or have skin contact if you work in the industry of mining copper or

ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>

processing the ore. You may breathe high levels if you grind or weld copper metal.

How can copper affect my health?

Copper is essential for good health, but high amounts can be harmful. Long-term exposure to copper dust can irritate your nose, mouth, and eyes, and cause headaches, dizziness, nausea, and diarrhea.

Drinking water with higher than normal levels of copper may cause vomiting, diarrhea, stomach cramps, and nausea. Intentionally high intakes of copper can cause liver and kidney damage and even death.

How likely is copper to cause cancer?

We do not know whether copper can cause cancer in humans. The EPA has determined that copper is not classifiable as to carcinogenicity.

How can copper affect children?

Exposure to high levels of copper will result in the same type of effects in children and adults. Studies in animals suggest that the young children may have more severe effects than adults; we do not know if this would also be true in humans. There is a very small percentage of infants and children who are unusually sensitive to copper.

We do not know if copper can cause birth defects or other developmental effects in humans. Studies in animals suggest that ingestion of high levels of copper may cause a decrease in fetal growth.

How can families reduce the risk of exposure to copper?

- The greatest potential source of copper exposure is through drinking water, especially in water that is first drawn in the morning after sitting in copper pipes and brass faucets overnight.
- To reduce exposure, run the water for at least 15-30 seconds before using it.
- If you are exposed to copper at work, you may carry

copper home on your skin, clothes, or tools. You can avoid this by showering, and changing clothing before leaving work, and your work clothes should be kept separate from other clothes and laundered separately.

Is there a medical test to show whether I've been exposed to copper?

Copper is normally found in all tissues of the body, blood, urine, feces, hair, and nails. High levels of copper in these samples can show that you have been exposed to higher than normal levels of copper. Tests to measure copper levels in the body are not routinely available at the doctor's office because they require special equipment. These tests cannot tell the extent of exposure or whether you will experience harmful effects.

Has the federal government made recommendations to protect human health?

The EPA has determined that drinking water should not contain more than 1.3 milligrams of copper per liter of water (1.3 mg/L).

The Occupational Safety and Health Administration (OSHA) has set a limit of 0.1 mg per cubic meter (0.1 mg/m³) of copper fumes (vapor generated from heating copper) and 1 mg/m³ of copper dusts (fine metallic copper particles) and mists (aerosol of soluble copper) in workroom air during an 8-hour work shift, 40-hour workweek.

The Food and Nutrition Board of the Institute of Medicine recommends dietary allowances (RDAs) of 340 micrograms (340 µg) of copper per day for children aged 1-3 years, 440 µg/day for children aged 4-8 years, 700 µg/day for children aged 9-13 years, 890 µg/day for children aged 14-18 years, and 900 µg/day for adults.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 2002. Toxicological Profile for Copper (Draft for Public Comment). Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about ethylbenzene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Ethylbenzene is a colorless liquid found in a number of products including gasoline and paints. Breathing very high levels can cause dizziness and throat and eye irritation. Ethylbenzene has been found in at least 731 of the 1,467 National Priorities List sites identified by the Environmental Protection Agency (EPA).

What is ethylbenzene?

(Pronounced ěth' əl bĕn' zĕn')

Ethylbenzene is a colorless, flammable liquid that smells like gasoline. It is found in natural products such as coal tar and petroleum and is also found in manufactured products such as inks, insecticides, and paints.

Ethylbenzene is used primarily to make another chemical, styrene. Other uses include as a solvent, in fuels, and to make other chemicals.

What happens to ethylbenzene when it enters the environment?

- Ethylbenzene moves easily into the air from water and soil.
- It takes about 3 days for ethylbenzene to be broken down in air into other chemicals.
- Ethylbenzene may be released to water from industrial discharges or leaking underground storage tanks.
- In surface water, ethylbenzene breaks down by reacting with other chemicals found naturally in water.
- In soil, it is broken down by soil bacteria.

How might I be exposed to ethylbenzene?

- Breathing air containing ethylbenzene, particularly in areas near factories or highways.
- Drinking contaminated tap water.
- Working in an industry where ethylbenzene is used or made.
- Using products containing it, such as gasoline, carpet glues, varnishes, and paints.

How can ethylbenzene affect my health?

Limited information is available on the effects of ethylbenzene on people's health. The available information shows dizziness, throat and eye irritation, tightening of the chest, and a burning sensation in the eyes of people exposed to high levels of ethylbenzene in air.

Animals studies have shown effects on the nervous system, liver, kidneys, and eyes from breathing ethylbenzene in air.

How likely is ethylbenzene to cause cancer?

The EPA has determined that ethylbenzene is not classified as to human carcinogenicity.

ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

No studies in people have shown that ethylbenzene exposure can result in cancer. Two available animal studies suggest that ethylbenzene may cause tumors.

How can ethylbenzene affect children?

Children may be exposed to ethylbenzene through inhalation of consumer products, including gasoline, paints, inks, pesticides, and carpet glue. We do not know whether children are more sensitive to the effects of ethylbenzene than adults.

It is not known whether ethylbenzene can affect the development of the human fetus. Animal studies have shown that when pregnant animals were exposed to ethylbenzene in air, their babies had an increased number of birth defects.

How can families reduce the risk of exposure to ethylbenzene?

Exposure to ethylbenzene vapors from household products and newly installed carpeting can be minimized by using adequate ventilation.

Household chemicals should be stored out of reach of children to prevent accidental poisoning. Always store household chemicals in their original containers; never store them in containers children would find attractive to eat or drink from, such as old soda bottles. Gasoline should be stored in a gasoline can with a locked cap.

Sometimes older children sniff household chemicals, including ethylbenzene, in an attempt to get high. Talk with your children about the dangers of sniffing chemicals.

Is there a medical test to show whether I've been exposed to ethylbenzene?

Ethylbenzene is found in the blood, urine, breath, and

some body tissues of exposed people. The most common way to test for ethylbenzene is in the urine. This test measures substances formed by the breakdown of ethylbenzene. This test needs to be done within a few hours after exposure occurs, because the substances leave the body very quickly.

These tests can show you were exposed to ethylbenzene, but cannot predict the kind of health effects that might occur.

Has the federal government made recommendations to protect human health?

The EPA has set a maximum contaminant level of 0.7 milligrams of ethylbenzene per liter of drinking water (0.7 mg/L).

The EPA requires that spills or accidental releases into the environment of 1,000 pounds or more of ethylbenzene be reported to the EPA.

The Occupational Safety and Health Administration (OSHA) has set an occupational exposure limit of 100 parts of ethylbenzene per million parts of air (100 ppm) for an 8-hour workday, 40-hour workweek.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 1999. Toxicological profile for ethylbenzene. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about fuel oils. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

SUMMARY: Fuel oils are liquid mixtures produced from petroleum, and their use mostly involves burning them as fuels. Drinking or breathing fuel oils may cause nausea or nervous system effects. However, exposure under normal use conditions is not likely to be harmful. Fuel oils have been found in at least 26 of the 1,430 National Priorities List sites identified by the Environmental Protection Agency (EPA).

What are fuel oils?

(Pronounced fyoo'el oilz)

Fuel oils are a variety of yellowish to light brown liquid mixtures that come from crude petroleum. Some chemicals found in fuel oils may evaporate easily, while others may more easily dissolve in water.

Fuel oils are produced by different petroleum refining processes, depending on their intended uses. Fuel oils may be used as fuel for engines, lamps, heaters, furnaces, and stoves, or as solvents.

Some commonly found fuel oils include kerosene, diesel fuel, jet fuel, range oil, and home heating oil. These fuel oils differ from one another by their hydrocarbon compositions, boiling point ranges, chemical additives, and uses.

What happens to fuel oils when they enter the environment?

- Some chemicals found in fuel oils may evaporate into the air from open containers or contaminated soil or water.
- Some chemicals found in fuel oils may dissolve in water after spills to surface waters or leaks from underground storage tanks.

- Some chemicals found in fuel oils may stick to particles in water, which will eventually cause them to settle to the bottom sediment.
- Some of the chemicals found in fuel oils may be broken down slowly in air, water, and soil by sunlight or small organisms.
- Some of the chemicals found in fuel oils may build up significantly in plants and animals.

How might I be exposed to fuel oils?

- Using a home kerosene heater or stove, or using fuel oils at work.
- Breathing air in home or building basements that has been contaminated with fuel oil vapors entering from the soil.
- Drinking or swimming in water that has been contaminated with fuel oils from a spill or a leaking underground storage tank.
- Touching soil contaminated with fuel oils.
- Using fuel oils to wash paint or grease from skin or equipment.

How can fuel oils affect my health?

Little information is available about the health effects that may be caused by fuel oils. People who use kerosene

ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

stoves for cooking do not seem to have any health problems related to their exposure.

Breathing some fuel oils for short periods may cause nausea, eye irritation, increased blood pressure, headache, lightheadedness, loss of appetite, poor coordination, and difficulty concentrating. Breathing diesel fuel vapors for long periods may cause kidney damage and lower your blood's ability to clot.

Drinking small amounts of kerosene may cause vomiting, diarrhea, coughing, stomach swelling and cramps, drowsiness, restlessness, painful breathing, irritability, and unconsciousness. Drinking large amounts of kerosene may cause convulsions, coma, or death. Skin contact with kerosene for short periods may cause itchy, red, sore, or peeling skin.

How likely are fuel oils to cause cancer?

The International Agency for Research on Cancer (IARC) has determined that some fuel oils (heavy) may possibly cause cancer in humans, but for other fuel oils (light) there is not enough information to make a determination. IARC has also determined that occupational exposures to fuel oils during petroleum refining are probably carcinogenic in humans.

Some studies with mice have suggested that repeated contact with fuel oils may cause liver or skin cancer. However, other mouse studies have found this not to be the case. No studies are available in other animals or in people on the carcinogenic effects of fuel oils.

Is there a medical test to show whether I've been exposed to fuel oils?

There is no medical test that shows if you have been exposed to fuel oils. Tests are available to determine if some of

the chemicals commonly found in fuel oils are in your blood. However, the presence of these chemicals in blood may not necessarily mean that you have been exposed to fuel oils.

Has the federal government made recommendations to protect human health?

The Occupational Safety and Health Administration (OSHA) and the Air Force Office of Safety and Health (AFOSH) have set a permissible exposure level (PEL) of 400 parts of petroleum distillates per million parts of air (400 ppm) for an 8-hour workday, 40-hour workweek.

The National Institute for Occupational Safety and Health (NIOSH) recommends that average workplace air levels not exceed 350 milligrams of petroleum distillates per cubic meter of air (350 mg/m³) for a 40-hour workweek.

The Department of Transportation (DOT) lists fuel oils as hazardous materials and, therefore, regulates their transportation.

Glossary

Carcinogenic: Able to cause cancer.

CAS: Chemical Abstracts Service.

Evaporate: To change into a vapor or a gas.

Hydrocarbon: Any compound made up of hydrogen and carbon.

Milligram (mg): One thousandth of a gram.

ppm: Parts per million.

Sediment: Mud and debris that have settled to the bottom of a body of water.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 1995. Toxicological profile for fuel oils. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop E-29, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 404-498-0093. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about lead. For more information, call the ATSDR Information Center at 1-800-232-4636. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It is important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Exposure to lead can happen from breathing workplace air or dust, eating contaminated foods, or drinking contaminated water. Children can be exposed from eating lead-based paint chips or playing in contaminated soil. Lead can damage the nervous system, kidneys, and reproductive system. Lead has been found in at least 1,272 of the 1,684 National Priority List sites identified by the Environmental Protection Agency (EPA).

What is lead?

Lead is a naturally occurring bluish-gray metal found in small amounts in the earth's crust. Lead can be found in all parts of our environment. Much of it comes from human activities including burning fossil fuels, mining, and manufacturing.

Lead has many different uses. It is used in the production of batteries, ammunition, metal products (solder and pipes), and devices to shield X-rays. Because of health concerns, lead from paints and ceramic products, caulking, and pipe solder has been dramatically reduced in recent years. The use of lead as an additive to gasoline was banned in 1996 in the United States.

What happens to lead when it enters the environment?

- Lead itself does not break down, but lead compounds are changed by sunlight, air, and water.
- When lead is released to the air, it may travel long distances before settling to the ground.
- Once lead falls onto soil, it usually sticks to soil particles.
- Movement of lead from soil into groundwater will depend on the type of lead compound and the characteristics of the soil.

How might I be exposed to lead?

- Eating food or drinking water that contains lead. Water pipes in some older homes may contain lead solder. Lead can leach out into the water.

- Spending time in areas where lead-based paints have been used and are deteriorating. Deteriorating lead paint can contribute to lead dust.

- Working in a job where lead is used or engaging in certain hobbies in which lead is used, such as making stained glass.

- Using health-care products or folk remedies that contain lead.

How can lead affect my health?

The effects of lead are the same whether it enters the body through breathing or swallowing. Lead can affect almost every organ and system in your body. The main target for lead toxicity is the nervous system, both in adults and children. Long-term exposure of adults can result in decreased performance in some tests that measure functions of the nervous system. It may also cause weakness in fingers, wrists, or ankles. Lead exposure also causes small increases in blood pressure, particularly in middle-aged and older people and can cause anemia. Exposure to high lead levels can severely damage the brain and kidneys in adults or children and ultimately cause death. In pregnant women, high levels of exposure to lead may cause miscarriage. High-level exposure in men can damage the organs responsible for sperm production.

How likely is lead to cause cancer?

We have no conclusive proof that lead causes cancer in humans. Kidney tumors have developed in rats and mice that had been given large doses of some kind of lead compounds. The Department of Health and Human Services

ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>

(DHHS) has determined that lead and lead compounds are reasonably anticipated to be human carcinogens and the EPA has determined that lead is a probable human carcinogen. The International Agency for Research on Cancer (IARC) has determined that inorganic lead is probably carcinogenic to humans and that there is insufficient information to determine whether organic lead compounds will cause cancer in humans.

How can lead affect children?

Small children can be exposed by eating lead-based paint chips, chewing on objects painted with lead-based paint, or swallowing house dust or soil that contains lead.

Children are more vulnerable to lead poisoning than adults. A child who swallows large amounts of lead may develop blood anemia, severe stomachache, muscle weakness, and brain damage. If a child swallows smaller amounts of lead, much less severe effects on blood and brain function may occur. Even at much lower levels of exposure, lead can affect a child's mental and physical growth.

Exposure to lead is more dangerous for young and unborn children. Unborn children can be exposed to lead through their mothers. Harmful effects include premature births, smaller babies, decreased mental ability in the infant, learning difficulties, and reduced growth in young children. These effects are more common if the mother or baby was exposed to high levels of lead. Some of these effects may persist beyond childhood.

How can families reduce the risks of exposure to lead?

- Avoid exposure to sources of lead.
- Do not allow children to chew on mouth surfaces that may have been painted with lead-based paint.
- If you have a water lead problem, run or flush water that has been standing overnight before drinking or cooking with it.
- Some types of paints and pigments that are used as make-up or hair coloring contain lead. Keep these kinds of products away from children
- If your home contains lead-based paint or you live in an area contaminated with lead, wash children's hands and faces

often to remove lead dusts and soil, and regularly clean the house of dust and tracked in soil.

Is there a medical test to determine whether I've been exposed to lead?

A blood test is available to measure the amount of lead in your blood and to estimate the amount of your recent exposure to lead. Blood tests are commonly used to screen children for lead poisoning. Lead in teeth or bones can be measured by X-ray techniques, but these methods are not widely available. Exposure to lead also can be evaluated by measuring erythrocyte protoporphyrin (EP) in blood samples. EP is a part of red blood cells known to increase when the amount of lead in the blood is high. However, the EP level is not sensitive enough to identify children with elevated blood lead levels below about 25 micrograms per deciliter ($\mu\text{g}/\text{dL}$). These tests usually require special analytical equipment that is not available in a doctor's office. However, your doctor can draw blood samples and send them to appropriate laboratories for analysis.

Has the federal government made recommendations to protect human health?

The Centers for Disease Control and Prevention (CDC) recommends that states test children at ages 1 and 2 years. Children should be tested at ages 3–6 years if they have never been tested for lead, if they receive services from public assistance programs for the poor such as Medicaid or the Supplemental Food Program for Women, Infants, and Children, if they live in a building or frequently visit a house built before 1950; if they visit a home (house or apartment) built before 1978 that has been recently remodeled; and/or if they have a brother, sister, or playmate who has had lead poisoning. CDC considers a blood lead level of 10 $\mu\text{g}/\text{dL}$ to be a level of concern for children.

EPA limits lead in drinking water to 15 μg per liter.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 2007. Toxicological Profile for lead (Update). Atlanta, GA: U.S. Department of Public Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology and Environmental Medicine, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-800-232-4636, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about mercury. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Exposure to mercury occurs from breathing contaminated air, ingesting contaminated water and food, and having dental and medical treatments. Mercury, at high levels, may damage the brain, kidneys, and developing fetus. This chemical has been found in at least 714 of 1,467 National Priorities List sites identified by the Environmental Protection Agency.

What is mercury?

(Pronounced mŭr/kyə-rē)

Mercury is a naturally occurring metal which has several forms. The metallic mercury is a shiny, silver-white, odorless liquid. If heated, it is a colorless, odorless gas.

Mercury combines with other elements, such as chlorine, sulfur, or oxygen, to form inorganic mercury compounds or "salts," which are usually white powders or crystals. Mercury also combines with carbon to make organic mercury compounds. The most common one, methylmercury, is produced mainly by microscopic organisms in the water and soil. More mercury in the environment can increase the amounts of methylmercury that these small organisms make.

Metallic mercury is used to produce chlorine gas and caustic soda, and is also used in thermometers, dental fillings, and batteries. Mercury salts are sometimes used in skin lightening creams and as antiseptic creams and ointments.

What happens to mercury when it enters the environment?

- Inorganic mercury (metallic mercury and inorganic mercury compounds) enters the air from mining ore deposits, burning coal and waste, and from manufacturing plants.
- It enters the water or soil from natural deposits, disposal of wastes, and volcanic activity.

- Methylmercury may be formed in water and soil by small organisms called bacteria.
- Methylmercury builds up in the tissues of fish. Larger and older fish tend to have the highest levels of mercury.

How might I be exposed to mercury?

- Eating fish or shellfish contaminated with methylmercury.
- Breathing vapors in air from spills, incinerators, and industries that burn mercury-containing fuels.
- Release of mercury from dental work and medical treatments.
- Breathing contaminated workplace air or skin contact during use in the workplace (dental, health services, chemical, and other industries that use mercury).
- Practicing rituals that include mercury.

How can mercury affect my health?

The nervous system is very sensitive to all forms of mercury. Methylmercury and metallic mercury vapors are more harmful than other forms, because more mercury in these forms reaches the brain. Exposure to high levels of metallic, inorganic, or organic mercury can permanently damage the brain, kidneys, and developing fetus. Effects on brain functioning may result in irritability, shyness, tremors, changes in vision or hearing, and memory problems.

Short-term exposure to high levels of metallic mercury vapors may cause effects including lung damage, nausea,

ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

vomiting, diarrhea, increases in blood pressure or heart rate, skin rashes, and eye irritation.

How likely is mercury to cause cancer?

There are inadequate human cancer data available for all forms of mercury. Mercuric chloride has caused increases in several types of tumors in rats and mice, and methylmercury has caused kidney tumors in male mice. The EPA has determined that mercuric chloride and methylmercury are possible human carcinogens.

How can mercury affect children?

Very young children are more sensitive to mercury than adults. Mercury in the mother's body passes to the fetus and may accumulate there. It can also pass to a nursing infant through breast milk. However, the benefits of breast feeding may be greater than the possible adverse effects of mercury in breast milk.

Mercury's harmful effects that may be passed from the mother to the fetus include brain damage, mental retardation, incoordination, blindness, seizures, and inability to speak. Children poisoned by mercury may develop problems of their nervous and digestive systems, and kidney damage.

How can families reduce the risk of exposure to mercury?

Carefully handle and dispose of products that contain mercury, such as thermometers or fluorescent light bulbs. Do not vacuum up spilled mercury, because it will vaporize and increase exposure. If a large amount of mercury has been spilled, contact your health department. Teach children not to play with shiny, silver liquids.

Properly dispose of older medicines that contain mercury. Keep all mercury-containing medicines away from children.

Pregnant women and children should keep away from

rooms where liquid mercury has been used.

Learn about wildlife and fish advisories in your area from your public health or natural resources department.

Is there a medical test to show whether I've been exposed to mercury?

Tests are available to measure mercury levels in the body. Blood or urine samples are used to test for exposure to metallic mercury and to inorganic forms of mercury. Mercury in whole blood or in scalp hair is measured to determine exposure to methylmercury. Your doctor can take samples and send them to a testing laboratory.

Has the federal government made recommendations to protect human health?

The EPA has set a limit of 2 parts of mercury per billion parts of drinking water (2 ppb).

The Food and Drug Administration (FDA) has set a maximum permissible level of 1 part of methylmercury in a million parts of seafood (1 ppm).

The Occupational Safety and Health Administration (OSHA) has set limits of 0.1 milligram of organic mercury per cubic meter of workplace air (0.1 mg/m³) and 0.05 mg/m³ of metallic mercury vapor for 8-hour shifts and 40-hour work weeks.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 1999. Toxicological profile for mercury. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about polycyclic aromatic hydrocarbons (PAHs). For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. This information is important because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

SUMMARY: Exposure to polycyclic aromatic hydrocarbons usually occurs by breathing air contaminated by wild fires or coal tar, or by eating foods that have been grilled. PAHs have been found in at least 600 of the 1,430 National Priorities List sites identified by the Environmental Protection Agency (EPA).

What are polycyclic aromatic hydrocarbons?

(Pronounced pŏl'ī-sī'klīk ār'ə-măt'īk hī'drə-kar'bənz)

Polycyclic aromatic hydrocarbons (PAHs) are a group of over 100 different chemicals that are formed during the incomplete burning of coal, oil and gas, garbage, or other organic substances like tobacco or charbroiled meat. PAHs are usually found as a mixture containing two or more of these compounds, such as soot.

Some PAHs are manufactured. These pure PAHs usually exist as colorless, white, or pale yellow-green solids. PAHs are found in coal tar, crude oil, creosote, and roofing tar, but a few are used in medicines or to make dyes, plastics, and pesticides.

What happens to PAHs when they enter the environment?

- PAHs enter the air mostly as releases from volcanoes, forest fires, burning coal, and automobile exhaust.
- PAHs can occur in air attached to dust particles.
- Some PAH particles can readily evaporate into the air from soil or surface waters.
- PAHs can break down by reacting with sunlight and other chemicals in the air, over a period of days to weeks.

- PAHs enter water through discharges from industrial and wastewater treatment plants.
- Most PAHs do not dissolve easily in water. They stick to solid particles and settle to the bottoms of lakes or rivers.
- Microorganisms can break down PAHs in soil or water after a period of weeks to months.
- In soils, PAHs are most likely to stick tightly to particles; certain PAHs move through soil to contaminate underground water.
- PAH contents of plants and animals may be much higher than PAH contents of soil or water in which they live.

How might I be exposed to PAHs?

- Breathing air containing PAHs in the workplace of coking, coal-tar, and asphalt production plants; smoke-houses; and municipal trash incineration facilities.
- Breathing air containing PAHs from cigarette smoke, wood smoke, vehicle exhausts, asphalt roads, or agricultural burn smoke.
- Coming in contact with air, water, or soil near hazardous waste sites.
- Eating grilled or charred meats; contaminated cereals, flour, bread, vegetables, fruits, meats; and processed or pickled foods.
- Drinking contaminated water or cow's milk.

ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

- ❑ Nursing infants of mothers living near hazardous waste sites may be exposed to PAHs through their mother's milk.

How can PAHs affect my health?

Mice that were fed high levels of one PAH during pregnancy had difficulty reproducing and so did their offspring. These offspring also had higher rates of birth defects and lower body weights. It is not known whether these effects occur in people.

Animal studies have also shown that PAHs can cause harmful effects on the skin, body fluids, and ability to fight disease after both short- and long-term exposure. But these effects have not been seen in people.

How likely are PAHs to cause cancer?

The Department of Health and Human Services (DHHS) has determined that some PAHs may reasonably be expected to be carcinogens.

Some people who have breathed or touched mixtures of PAHs and other chemicals for long periods of time have developed cancer. Some PAHs have caused cancer in laboratory animals when they breathed air containing them (lung cancer), ingested them in food (stomach cancer), or had them applied to their skin (skin cancer).

Is there a medical test to show whether I've been exposed to PAHs?

In the body, PAHs are changed into chemicals that can attach to substances within the body. There are special tests that can detect PAHs attached to these substances in body tissues or blood. However, these tests cannot tell whether any

health effects will occur or find out the extent or source of your exposure to the PAHs. The tests aren't usually available in your doctor's office because special equipment is needed to conduct them.

Has the federal government made recommendations to protect human health?

The Occupational Safety and Health Administration (OSHA) has set a limit of 0.2 milligrams of PAHs per cubic meter of air (0.2 mg/m³). The OSHA Permissible Exposure Limit (PEL) for mineral oil mist that contains PAHs is 5 mg/m³ averaged over an 8-hour exposure period.

The National Institute for Occupational Safety and Health (NIOSH) recommends that the average workplace air levels for coal tar products not exceed 0.1 mg/m³ for a 10-hour workday, within a 40-hour workweek. There are other limits for workplace exposure for things that contain PAHs, such as coal, coal tar, and mineral oil.

Glossary

Carcinogen: A substance that can cause cancer.

Ingest: Take food or drink into your body.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 1995. Toxicological profile for polycyclic aromatic hydrocarbons. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about trichloroethylene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. This information is important because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Trichloroethylene is a colorless liquid which is used as a solvent for cleaning metal parts. Drinking or breathing high levels of trichloroethylene may cause nervous system effects, liver and lung damage, abnormal heartbeat, coma, and possibly death. Trichloroethylene has been found in at least 852 of the 1,430 National Priorities List sites identified by the Environmental Protection Agency (EPA).

What is trichloroethylene?

Trichloroethylene (TCE) is a nonflammable, colorless liquid with a somewhat sweet odor and a sweet, burning taste. It is used mainly as a solvent to remove grease from metal parts, but it is also an ingredient in adhesives, paint removers, typewriter correction fluids, and spot removers.

Trichloroethylene is not thought to occur naturally in the environment. However, it has been found in underground water sources and many surface waters as a result of the manufacture, use, and disposal of the chemical.

What happens to trichloroethylene when it enters the environment?

- ❑ Trichloroethylene dissolves a little in water, but it can remain in ground water for a long time.
- ❑ Trichloroethylene quickly evaporates from surface water, so it is commonly found as a vapor in the air.
- ❑ Trichloroethylene evaporates less easily from the soil than from surface water. It may stick to particles and remain for a long time.
- ❑ Trichloroethylene may stick to particles in water, which will cause it to eventually settle to the bottom sediment.
- ❑ Trichloroethylene does not build up significantly in

plants and animals.

How might I be exposed to trichloroethylene?

- ❑ Breathing air in and around the home which has been contaminated with trichloroethylene vapors from shower water or household products such as spot removers and typewriter correction fluid.
- ❑ Drinking, swimming, or showering in water that has been contaminated with trichloroethylene.
- ❑ Contact with soil contaminated with trichloroethylene, such as near a hazardous waste site.
- ❑ Contact with the skin or breathing contaminated air while manufacturing trichloroethylene or using it at work to wash paint or grease from skin or equipment.

How can trichloroethylene affect my health?

Breathing small amounts may cause headaches, lung irritation, dizziness, poor coordination, and difficulty concentrating.

Breathing large amounts of trichloroethylene may cause impaired heart function, unconsciousness, and death. Breathing it for long periods may cause nerve, kidney, and liver damage.

ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>

Drinking large amounts of trichloroethylene may cause nausea, liver damage, unconsciousness, impaired heart function, or death.

Drinking small amounts of trichloroethylene for long periods may cause liver and kidney damage, impaired immune system function, and impaired fetal development in pregnant women, although the extent of some of these effects is not yet clear.

Skin contact with trichloroethylene for short periods may cause skin rashes.

How likely is trichloroethylene to cause cancer?

Some studies with mice and rats have suggested that high levels of trichloroethylene may cause liver, kidney, or lung cancer. Some studies of people exposed over long periods to high levels of trichloroethylene in drinking water or in workplace air have found evidence of increased cancer. Although, there are some concerns about the studies of people who were exposed to trichloroethylene, some of the effects found in people were similar to effects in animals.

In its 9th Report on Carcinogens, the National Toxicology Program (NTP) determined that trichloroethylene is “reasonably anticipated to be a human carcinogen.” The International Agency for Research on Cancer (IARC) has determined that trichloroethylene is “probably carcinogenic to humans.”

Is there a medical test to show whether I've been exposed to trichloroethylene?

If you have recently been exposed to trichloroethylene, it can be detected in your breath, blood, or urine. The breath test, if it is performed soon after exposure, can tell if you have been exposed to even a small amount of trichloroethylene.

Exposure to larger amounts is assessed by blood

and urine tests, which can detect trichloroethylene and many of its breakdown products for up to a week after exposure. However, exposure to other similar chemicals can produce the same breakdown products, so their detection is not absolute proof of exposure to trichloroethylene. This test isn't available at most doctors' offices, but can be done at special laboratories that have the right equipment.

Has the federal government made recommendations to protect human health?

The EPA has set a maximum contaminant level for trichloroethylene in drinking water at 0.005 milligrams per liter (0.005 mg/L) or 5 parts of TCE per billion parts water.

The EPA has also developed regulations for the handling and disposal of trichloroethylene.

The Occupational Safety and Health Administration (OSHA) has set an exposure limit of 100 parts of trichloroethylene per million parts of air (100 ppm) for an 8-hour workday, 40-hour workweek.

Glossary

Carcinogenicity: The ability of a substance to cause cancer.

CAS: Chemical Abstracts Service.

Evaporate: To change into a vapor or gas.

Milligram (mg): One thousandth of a gram.

Nonflammable: Will not burn.

ppm: Parts per million.

Sediment: Mud and debris that have settled to the bottom of a body of water.

Solvent: A chemical that dissolves other substances.

References

This ToxFAQs information is taken from the 1997 Toxicological Profile for Trichloroethylene (update) produced by the Agency for Toxic Substances and Disease Registry, Public Health Service, U.S. Department of Health and Human Services, Public Health Service in Atlanta, GA.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.

This fact sheet answers the most frequently asked health questions (FAQs) about tetrachloroethylene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Tetrachloroethylene is a manufactured chemical used for dry cleaning and metal degreasing. Exposure to very high concentrations of tetrachloroethylene can cause dizziness, headaches, sleepiness, confusion, nausea, difficulty in speaking and walking, unconsciousness, and death. Tetrachloroethylene has been found in at least 771 of the 1,430 National Priorities List sites identified by the Environmental Protection Agency (EPA).

What is tetrachloroethylene?

(Pronounced tět'rə-klôr' 0-ěth'ə-lēn')

Tetrachloroethylene is a manufactured chemical that is widely used for dry cleaning of fabrics and for metal-degreasing. It is also used to make other chemicals and is used in some consumer products.

Other names for tetrachloroethylene include perchloroethylene, PCE, and tetrachloroethene. It is a nonflammable liquid at room temperature. It evaporates easily into the air and has a sharp, sweet odor. Most people can smell tetrachloroethylene when it is present in the air at a level of 1 part tetrachloroethylene per million parts of air (1 ppm) or more, although some can smell it at even lower levels.

What happens to tetrachloroethylene when it enters the environment?

- Much of the tetrachloroethylene that gets into water or soil evaporates into the air.
- Microorganisms can break down some of the tetrachloroethylene in soil or underground water.
- In the air, it is broken down by sunlight into other chemicals or brought back to the soil and water by rain.
- It does not appear to collect in fish or other animals that live in water.

How might I be exposed to tetrachloroethylene?

- When you bring clothes from the dry cleaners, they will release small amounts of tetrachloroethylene into the air.
- When you drink water containing tetrachloroethylene, you are exposed to it.

How can tetrachloroethylene affect my health?

High concentrations of tetrachloroethylene (particularly in closed, poorly ventilated areas) can cause dizziness, headache, sleepiness, confusion, nausea, difficulty in speaking and walking, unconsciousness, and death.

Irritation may result from repeated or extended skin contact with it. These symptoms occur almost entirely in work (or hobby) environments when people have been accidentally exposed to high concentrations or have intentionally used tetrachloroethylene to get a "high."

In industry, most workers are exposed to levels lower than those causing obvious nervous system effects. The health effects of breathing in air or drinking water with low levels of tetrachloroethylene are not known.

Results from some studies suggest that women who work in dry cleaning industries where exposures to tetrachloroethyl-

ToxFAQs Internet home page via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

ene can be quite high may have more menstrual problems and spontaneous abortions than women who are not exposed. However, it is not known if tetrachloroethylene was responsible for these problems because other possible causes were not considered.

Results of animal studies, conducted with amounts much higher than those that most people are exposed to, show that tetrachloroethylene can cause liver and kidney damage. Exposure to very high levels of tetrachloroethylene can be toxic to the unborn pups of pregnant rats and mice. Changes in behavior were observed in the offspring of rats that breathed high levels of the chemical while they were pregnant.

How likely is tetrachloroethylene to cause cancer?

The Department of Health and Human Services (DHHS) has determined that tetrachloroethylene may reasonably be anticipated to be a carcinogen. Tetrachloroethylene has been shown to cause liver tumors in mice and kidney tumors in male rats.

Is there a medical test to show whether I've been exposed to tetrachloroethylene?

One way of testing for tetrachloroethylene exposure is to measure the amount of the chemical in the breath, much the same way breath-alcohol measurements are used to determine the amount of alcohol in the blood.

Because it is stored in the body's fat and slowly released into the bloodstream, tetrachloroethylene can be detected in the breath for weeks following a heavy exposure.

Tetrachloroethylene and trichloroacetic acid (TCA), a breakdown product of tetrachloroethylene, can be detected in the blood. These tests are relatively simple to perform. These tests aren't available at most doctors' offices, but can be per-

formed at special laboratories that have the right equipment.

Because exposure to other chemicals can produce the same breakdown products in the urine and blood, the tests for breakdown products cannot determine if you have been exposed to tetrachloroethylene or the other chemicals.

Has the federal government made recommendations to protect human health?

The EPA maximum contaminant level for the amount of tetrachloroethylene that can be in drinking water is 0.005 milligrams tetrachloroethylene per liter of water (0.005 mg/L).

The Occupational Safety and Health Administration (OSHA) has set a limit of 100 ppm for an 8-hour workday over a 40-hour workweek.

The National Institute for Occupational Safety and Health (NIOSH) recommends that tetrachloroethylene be handled as a potential carcinogen and recommends that levels in workplace air should be as low as possible.

Glossary

Carcinogen: A substance with the ability to cause cancer.

CAS: Chemical Abstracts Service.

Milligram (mg): One thousandth of a gram.

Nonflammable: Will not burn.

References

This ToxFAQs information is taken from the 1997 Toxicological Profile for Tetrachloroethylene (update) produced by the Agency for Toxic Substances and Disease Registry, Public Health Service, U.S. Department of Health and Human Services, Public Health Service in Atlanta, GA.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about toluene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Exposure to toluene occurs from breathing contaminated workplace air, in automobile exhaust, some consumer products paints, paint thinners, fingernail polish, lacquers, and adhesives. Toluene affects the nervous system. Toluene has been found at 959 of the 1,591 National Priority List sites identified by the Environmental Protection Agency

What is toluene?

Toluene is a clear, colorless liquid with a distinctive smell. Toluene occurs naturally in crude oil and in the tolu tree. It is also produced in the process of making gasoline and other fuels from crude oil and making coke from coal.

Toluene is used in making paints, paint thinners, fingernail polish, lacquers, adhesives, and rubber and in some printing and leather tanning processes.

What happens to toluene when it enters the environment?

Toluene enters the environment when you use materials that contain it. It can also enter surface water and groundwater from spills of solvents and petroleum products as well as from leaking underground storage tanks at gasoline stations and other facilities.

When toluene-containing products are placed in landfills or waste disposal sites, the toluene can enter the soil or water near the waste site.

Toluene does not usually stay in the environment long.

Toluene does not concentrate or buildup to high levels in animals.

How might I be exposed to toluene?

Breathing contaminated workplace air or automobile exhaust.

Working with gasoline, kerosene, heating oil, paints, and lacquers.

Drinking contaminated well-water.

Living near uncontrolled hazardous waste sites containing toluene products.

How can toluene affect my health?

Toluene may affect the nervous system. Low to moderate levels can cause tiredness, confusion, weakness, drunken-type actions, memory loss, nausea, loss of appetite, and

ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>

hearing and color vision loss. These symptoms usually disappear when exposure is stopped.

Inhaling High levels of toluene in a short time can make you feel light-headed, dizzy, or sleepy. It can also cause unconsciousness, and even death.

High levels of toluene may affect your kidneys.

How likely is toluene to cause cancer?

Studies in humans and animals generally indicate that toluene does not cause cancer.

The EPA has determined that the carcinogenicity of toluene can not be classified.

How can toluene affect children?

It is likely that health effects seen in children exposed to toluene will be similar to the effects seen in adults. Some studies in animals suggest that babies may be more sensitive than adults.

Breathing very high levels of toluene during pregnancy can result in children with birth defects and retard mental abilities, and growth. We do not know if toluene harms the unborn child if the mother is exposed to low levels of toluene during pregnancy.

How can families reduce the risk of exposure to toluene?

- Use toluene-containing products in well-ventilated areas.

- When not in use, toluene-containing products should be tightly covered to prevent evaporation into the air.

Is there a medical test to show whether I've been exposed to toluene?

There are tests to measure the level of toluene or its breakdown products in exhaled air, urine, and blood. To determine if you have been exposed to toluene, your urine or blood must be checked within 12 hours of exposure. Several other chemicals are also changed into the same breakdown products as toluene, so some of these tests are not specific for toluene.

Has the federal government made recommendations to protect human health?

EPA has set a limit of 1 milligram per liter of drinking water (1 mg/L).

Discharges, releases, or spills of more than 1,000 pounds of toluene must be reported to the National Response Center.

The Occupational Safety and Health Administration has set a limit of 200 parts toluene per million of workplace air (200 ppm).

References

Agency for Toxic Substances and Disease Registry (ATSDR). 2000. Toxicological Profile for Toluene. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about xylene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

SUMMARY: Exposure to xylene occurs in the workplace and when you use paint, gasoline, paint thinners and other products that contain it. People who breathe high levels may have dizziness, confusion, and a change in their sense of balance. This substance has been found in at least 658 of the 1,430 National Priorities List sites identified by the Environmental Protection Agency (EPA).

What is xylene?

(Pronounced zī'lēn)

Xylene is a colorless, sweet-smelling liquid that catches on fire easily. It occurs naturally in petroleum and coal tar and is formed during forest fires. You can smell xylene in air at 0.08–3.7 parts of xylene per million parts of air (ppm) and begin to taste it in water at 0.53–1.8 ppm.

Chemical industries produce xylene from petroleum. It's one of the top 30 chemicals produced in the United States in terms of volume.

Xylene is used as a solvent and in the printing, rubber, and leather industries. It is also used as a cleaning agent, a thinner for paint, and in paints and varnishes. It is found in small amounts in airplane fuel and gasoline.

What happens to xylene when it enters the environment?

- Xylene has been found in waste sites and landfills when discarded as used solvent, or in varnish, paint, or paint thinners.
- It evaporates quickly from the soil and surface water into the air.

- In the air, it is broken down by sunlight into other less harmful chemicals.
- It is broken down by microorganisms in soil and water.
- Only a small amount of it builds up in fish, shellfish, plants, and animals living in xylene-contaminated water.

How might I be exposed to xylene?

- Breathing xylene in workplace air or in automobile exhaust.
- Breathing contaminated air.
- Touching gasoline, paint, paint removers, varnish, shellac, and rust preventatives that contain it.
- Breathing cigarette smoke that has small amounts of xylene in it.
- Drinking contaminated water or breathing air near waste sites and landfills that contain xylene.
- The amount of xylene in food is likely to be low.

How can xylene affect my health?

Xylene affects the brain. High levels from exposure for short periods (14 days or less) or long periods (more than 1 year) can cause headaches, lack of muscle coordination, dizziness, confusion, and changes in one's sense of balance. Exposure of

ToxFAQs Internet home page via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

people to high levels of xylene for short periods can also cause irritation of the skin, eyes, nose, and throat; difficulty in breathing; problems with the lungs; delayed reaction time; memory difficulties; stomach discomfort; and possibly changes in the liver and kidneys. It can cause unconsciousness and even death at very high levels.

Studies of unborn animals indicate that high concentrations of xylene may cause increased numbers of deaths, and delayed growth and development. In many instances, these same concentrations also cause damage to the mothers. We do not know if xylene harms the unborn child if the mother is exposed to low levels of xylene during pregnancy.

How likely is xylene to cause cancer?

The International Agency for Research on Cancer (IARC) has determined that xylene is not classifiable as to its carcinogenicity in humans.

Human and animal studies have not shown xylene to be carcinogenic, but these studies are not conclusive and do not provide enough information to conclude that xylene does not cause cancer.

Is there a medical test to show whether I've been exposed to xylene?

Laboratory tests can detect xylene or its breakdown products in exhaled air, blood, or urine. There is a high degree of agreement between the levels of exposure to xylene and the levels of xylene breakdown products in the urine. However, a urine sample must be provided very soon after exposure ends because xylene quickly leaves the body. These tests are not routinely available at your doctor's office.

Has the federal government made recommendations to protect human health?

The EPA has set a limit of 10 ppm of xylene in drinking water.

The EPA requires that spills or accidental releases of xylenes into the environment of 1,000 pounds or more must be reported.

The Occupational Safety and Health Administration (OSHA) has set a maximum level of 100 ppm xylene in workplace air for an 8-hour workday, 40-hour workweek.

The National Institute for Occupational Safety and Health (NIOSH) and the American Conference of Governmental Industrial Hygienists (ACGIH) also recommend exposure limits of 100 ppm in workplace air.

NIOSH has recommended that 900 ppm of xylene be considered immediately dangerous to life or health. This is the exposure level of a chemical that is likely to cause permanent health problems or death.

Glossary

Evaporate: To change from a liquid into a vapor or a gas.

Carcinogenic: Having the ability to cause cancer.

CAS: Chemical Abstracts Service.

ppm: Parts per million.

Solvent: A liquid that can dissolve other substances.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 1995. Toxicological profile for xylenes (update). Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop E-29, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 404-498-0093. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about zinc. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It is important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Zinc is a naturally occurring element. Exposure to high levels of zinc occurs mostly from eating food, drinking water, or breathing workplace air that is contaminated. Low levels of zinc are essential for maintaining good health. Exposure to large amounts of zinc can be harmful. It can cause stomach cramps, anemia, and changes in cholesterol levels. Zinc has been found in at least 985 of the 1,662 National Priority List sites identified by the Environmental Protection Agency (EPA).

What is zinc?

Zinc is one of the most common elements in the earth's crust. It is found in air, soil, and water, and is present in all foods. Pure zinc is a bluish-white shiny metal.

Zinc has many commercial uses as coatings to prevent rust, in dry cell batteries, and mixed with other metals to make alloys like brass, and bronze. A zinc and copper alloy is used to make pennies in the United States.

Zinc combines with other elements to form zinc compounds. Common zinc compounds found at hazardous waste sites include zinc chloride, zinc oxide, zinc sulfate, and zinc sulfide. Zinc compounds are widely used in industry to make paint, rubber, dyes, wood preservatives, and ointments.

What happens to zinc when it enters the environment?

- Some is released into the environment by natural processes, but most comes from human activities like mining, steel production, coal burning, and burning of waste.
- It attaches to soil, sediments, and dust particles in the air.
- Rain and snow remove zinc dust particles from the air.
- Depending on the type of soil, some zinc compounds can move into the groundwater and into lakes, streams, and rivers.
- Most of the zinc in soil stays bound to soil particles and

does not dissolve in water.

- It builds up in fish and other organisms, but it does not build up in plants.

How might I be exposed to zinc?

- Ingesting small amounts present in your food and water.
- Drinking contaminated water or a beverage that has been stored in metal containers or flows through pipes that have been coated with zinc to resist rust.
- Eating too many dietary supplements that contain zinc.
- Working on any of the following jobs: construction, painting, automobile mechanics, mining, smelting, and welding; manufacture of brass, bronze, or other zinc-containing alloys; manufacture of galvanized metals; and manufacture of machine parts, rubber, paint, linoleum, oilcloths, batteries, some kind of glass, ceramics, and dyes.

How can zinc affect my health?

Zinc is an essential element in our diet. Too little zinc can cause problems, but too much zinc is also harmful.

Harmful effects generally begin at levels 10-15 times higher than the amount needed for good health. Large doses taken by mouth even for a short time can cause stomach cramps, nausea, and vomiting. Taken longer, it can cause anemia and decrease the levels of your good cholesterol. We do not know if high levels of zinc affect reproduction in humans. Rats that were fed large amounts of zinc became infertile.

ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>

Inhaling large amounts of zinc (as dusts or fumes) can cause a specific short-term disease called metal fume fever. We do not know the long-term effects of breathing high levels of zinc.

Putting low levels of zinc acetate and zinc chloride on the skin of rabbits, guinea pigs, and mice caused skin irritation. Skin irritation will probably occur in people.

How likely is zinc to cause cancer?

The Department of Health and Human Services (DHHS) and the International Agency for Research on Cancer (IARC) have not classified zinc for carcinogenicity. Based on incomplete information from human and animal studies, the EPA has determined that zinc is not classifiable as to its human carcinogenicity.

How can zinc affect children?

Zinc is essential for proper growth and development of young children. It is likely that children exposed to very high levels of zinc will have similar effects as adults. We do not know whether children are more susceptible to the effects of excessive intake of zinc than the adults.

We do not know if excess zinc can cause developmental effects in humans. Animal studies have found decreased weight in the offspring of animals that ingested very high amounts of zinc.

How can families reduce the risks of exposure to zinc?

- Children living near waste sites that contain zinc may be exposed to higher levels of zinc through breathing contaminated air, drinking contaminated drinking water, touching or eating contaminated soil.
- Discourage your children from eating soil or putting their hands in their mouths and teach them to wash their hands frequently and before eating.
- If you use medicines or vitamin supplements containing

zinc, make sure you use them appropriately and keep them out of the reach of children.

Is there a medical test to determine whether I've been exposed to zinc?

There are tests available to measure zinc in your blood, urine, hair, saliva, and feces. These tests are not usually done in the doctor's office because they require special equipment. High levels of zinc in the feces can mean high recent zinc exposure. High levels of zinc in the blood can mean high zinc consumption and/or high exposure. Tests to measure zinc in hair may provide information on long-term zinc exposure; however, the relationship between levels in your hair and the amount of zinc you were exposed to is not clear.

Has the federal government made recommendations to protect human health?

The EPA recommends that drinking water should contain no more than 5 milligrams per liter of water (5 mg/L) because of taste. The EPA requires that any release of 1,000 pounds (or in some cases 5,000 pounds) into the environment be reported to the agency.

To protect workers, the Occupational Safety and Health Administration (OSHA) has set an average limit of 1 mg/m³ for zinc chloride fumes and 5 mg/m³ for zinc oxide (dusts and fumes) in workplace air during an 8-hour workday, 40-hour workweek.

Similarly, the National Institute for Occupational Safety and Health (NIOSH) has set the same standards for up to a 10-hour workday over a 40-hour workweek.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 2005. Toxicological Profile for Zinc (Update). Atlanta, GA: U.S. Department of Public Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about arsenic. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Exposure to higher than average levels of arsenic occurs mostly in the workplace, near hazardous waste sites, or in areas with high natural levels. At high levels, inorganic arsenic can cause death. Exposure to lower levels for a long time can cause a discoloration of the skin and the appearance of small corns or warts. Arsenic has been found at 1,014 of the 1,598 National Priority List sites identified by the Environmental Protection Agency (EPA).

What is arsenic?

Arsenic is a naturally occurring element widely distributed in the earth's crust. In the environment, arsenic is combined with oxygen, chlorine, and sulfur to form inorganic arsenic compounds. Arsenic in animals and plants combines with carbon and hydrogen to form organic arsenic compounds.

Inorganic arsenic compounds are mainly used to preserve wood. Organic arsenic compounds are used as pesticides, primarily on cotton plants.

What happens to arsenic when it enters the environment?

- Arsenic cannot be destroyed in the environment. It can only change its form.
- Arsenic in air will settle to the ground or is washed out of the air by rain.
- Many arsenic compounds can dissolve in water.
- Fish and shellfish can accumulate arsenic, but the arsenic in fish is mostly in a form that is not harmful.

How might I be exposed to arsenic?

- Eating food, drinking water, or breathing air containing arsenic.
- Breathing contaminated workplace air.
- Breathing sawdust or burning smoke from wood treated with arsenic.
- Living near uncontrolled hazardous waste sites containing arsenic.
- Living in areas with unusually high natural levels of arsenic in rock.

How can arsenic affect my health?

Breathing high levels of inorganic arsenic can give you a sore throat or irritated lungs. Ingesting high levels of inorganic arsenic can result in death. Lower levels of arsenic can cause nausea and vomiting, decreased production of red and white blood cells, abnormal heart rhythm, damage to blood vessels, and a sensation of "pins and needles" in hands and feet.

Ingesting or breathing low levels of inorganic arsenic for a long time can cause a darkening of the skin and the

ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>

appearance of small “corns” or “warts” on the palms, soles, and torso.

Skin contact with inorganic arsenic may cause redness and swelling.

Organic arsenic compounds are less toxic than inorganic arsenic compounds. Exposure to high levels of some organic arsenic compounds may cause similar effects as inorganic arsenic.

How likely is arsenic to cause cancer?

Several studies have shown that inorganic arsenic can increase the risk of lung cancer, skin cancer, bladder cancer, liver cancer, kidney cancer, and prostate cancer. The World Health Organization (WHO), the Department of Health and Human Services (DHHS), and the EPA have determined that inorganic arsenic is a human carcinogen.

How can arsenic affect children?

We do not know if exposure to arsenic will result in birth defects or other developmental effects in people. Birth defects have been observed in animals exposed to inorganic arsenic.

It is likely that health effects seen in children exposed to high amounts of arsenic will be similar to the effects seen in adults.

How can families reduce the risk of exposure to arsenic?

- If you use arsenic-treated wood in home projects, you should wear dust masks, gloves, and protective clothing to decrease exposure to sawdust.
- If you live in an area with high levels of arsenic in water or soil, you should use cleaner sources of water and limit contact with soil.

Is there a medical test to show whether I've been exposed to arsenic?

There are tests to measure the level of arsenic in blood, urine, hair, or fingernails. The urine test is the most reliable test for arsenic exposure within the last few days. Tests on hair and fingernails can measure exposure to high levels of arsenic over the past 6-12 months. These tests can determine if you have been exposed to above-average levels of arsenic. They cannot predict how the arsenic levels in your body will affect your health.

Has the federal government made recommendations to protect human health?

EPA has set limits on the amount of arsenic that industrial sources can release to the environment and has restricted or canceled many uses of arsenic in pesticides. EPA has set a limit of 0.01 parts per million (ppm) for arsenic in drinking water.

The Occupational Safety and Health Administration has set limits of 10 µg arsenic per cubic meter of workplace air (10 µg/m³) for 8 hour shifts and 40 hour work weeks.

Source of Information

Agency for Toxic Substances and Disease Registry (ATSDR). 2000. Toxicological Profile for Arsenic. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about benzene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. This information is important because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Benzene is a widely used chemical formed from both natural processes and human activities. Breathing benzene can cause drowsiness, dizziness, and unconsciousness; long-term benzene exposure causes effects on the bone marrow and can cause anemia and leukemia. Benzene has been found in at least 813 of the 1,430 National Priorities List sites identified by the Environmental Protection Agency (EPA).

What is benzene?

(Pronounced bĕn'zĕn')

Benzene is a colorless liquid with a sweet odor. It evaporates into the air very quickly and dissolves slightly in water. It is highly flammable and is formed from both natural processes and human activities.

Benzene is widely used in the United States; it ranks in the top 20 chemicals for production volume. Some industries use benzene to make other chemicals which are used to make plastics, resins, and nylon and synthetic fibers. Benzene is also used to make some types of rubbers, lubricants, dyes, detergents, drugs, and pesticides. Natural sources of benzene include volcanoes and forest fires. Benzene is also a natural part of crude oil, gasoline, and cigarette smoke.

What happens to benzene when it enters the environment?

- Industrial processes are the main source of benzene in the environment.
- Benzene can pass into the air from water and soil.
- It reacts with other chemicals in the air and breaks down within a few days.
- Benzene in the air can attach to rain or snow and be carried back down to the ground.

- It breaks down more slowly in water and soil, and can pass through the soil into underground water.
- Benzene does not build up in plants or animals.

How might I be exposed to benzene?

- Outdoor air contains low levels of benzene from tobacco smoke, automobile service stations, exhaust from motor vehicles, and industrial emissions.
- Indoor air generally contains higher levels of benzene from products that contain it such as glues, paints, furniture wax, and detergents.
- Air around hazardous waste sites or gas stations will contain higher levels of benzene.
- Leakage from underground storage tanks or from hazardous waste sites containing benzene can result in benzene contamination of well water.
- People working in industries that make or use benzene may be exposed to the highest levels of it.
- A major source of benzene exposures is tobacco smoke.

How can benzene affect my health?

Breathing very high levels of benzene can result in death, while high levels can cause drowsiness, dizziness, rapid heart rate, headaches, tremors, confusion, and unconsciousness. Eating or drinking foods containing high levels of benzene can cause vomiting, irritation of the stomach, dizziness, sleepiness, convulsions, rapid heart rate, and death.

ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

The major effect of benzene from long-term (365 days or longer) exposure is on the blood. Benzene causes harmful effects on the bone marrow and can cause a decrease in red blood cells leading to anemia. It can also cause excessive bleeding and can affect the immune system, increasing the chance for infection.

Some women who breathed high levels of benzene for many months had irregular menstrual periods and a decrease in the size of their ovaries. It is not known whether benzene exposure affects the developing fetus in pregnant women or fertility in men.

Animal studies have shown low birth weights, delayed bone formation, and bone marrow damage when pregnant animals breathed benzene.

How likely is benzene to cause cancer?

The Department of Health and Human Services (DHHS) has determined that benzene is a known human carcinogen. Long-term exposure to high levels of benzene in the air can cause leukemia, cancer of the blood-forming organs.

Is there a medical test to show whether I've been exposed to benzene?

Several tests can show if you have been exposed to benzene. There is test for measuring benzene in the breath; this test must be done shortly after exposure. Benzene can also be measured in the blood, however, since benzene disappears rapidly from the blood, measurements are accurate only for recent exposures.

In the body, benzene is converted to products called metabolites. Certain metabolites can be measured in the urine. However, this test must be done shortly after exposure and is not a reliable indicator of how much benzene you have been exposed to, since the metabolites may be present in urine from other sources.

Has the federal government made recommendations to protect human health?

The EPA has set the maximum permissible level of benzene in drinking water at 0.005 milligrams per liter (0.005 mg/L). The EPA requires that spills or accidental releases into the environment of 10 pounds or more of benzene be reported to the EPA.

The Occupational Safety and Health Administration (OSHA) has set a permissible exposure limit of 1 part of benzene per million parts of air (1 ppm) in the workplace during an 8-hour workday, 40-hour workweek.

Glossary

Anemia: A decreased ability of the blood to transport oxygen.

Carcinogen: A substance with the ability to cause cancer.

CAS: Chemical Abstracts Service.

Chromosomes: Parts of the cells responsible for the development of hereditary characteristics.

Metabolites: Breakdown products of chemicals.

Milligram (mg): One thousandth of a gram.

Pesticide: A substance that kills pests.

References

This ToxFAQs information is taken from the 1997 Toxicological Profile for Benzene (update) produced by the Agency for Toxic Substances and Disease Registry, Public Health Service, U.S. Department of Health and Human Services, Public Health Service in Atlanta, GA.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop E-29, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 404-498-0093. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about chromium. For more information, call the ATSDR Information Center at 1-800-232-4636. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It is important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

HIGHLIGHTS: Exposure to chromium occurs from ingesting contaminated food or drinking water or breathing contaminated workplace air. Chromium(VI) at high levels can damage the nose and cause cancer. Ingesting high levels of chromium(VI) may result in anemia or damage to the stomach or intestines. Chromium(III) is an essential nutrient. Chromium has been found in at least 1,127 of the 1,669 National Priorities List sites identified by the Environmental Protection Agency (EPA).

What is chromium?

Chromium is a naturally occurring element found in rocks, animals, plants, and soil. It can exist in several different forms. Depending on the form it takes, it can be a liquid, solid, or gas. The most common forms are chromium(0), chromium(III), and chromium(VI). No taste or odor is associated with chromium compounds.

The metal chromium, which is the chromium(0) form, is used for making steel. Chromium(VI) and chromium(III) are used for chrome plating, dyes and pigments, leather tanning, and wood preserving.

What happens to chromium when it enters the environment?

- Chromium can be found in air, soil, and water after release from the manufacture, use, and disposal of chromium-based products, and during the manufacturing process.
- Chromium does not usually remain in the atmosphere, but is deposited into the soil and water.
- Chromium can easily change from one form to another in water and soil, depending on the conditions present.
- Fish do not accumulate much chromium in their bodies from water.

How might I be exposed to chromium?

- Eating food containing chromium(III).

- Breathing contaminated workplace air or skin contact during use in the workplace.
- Drinking contaminated well water.
- Living near uncontrolled hazardous waste sites containing chromium or industries that use chromium.

How can chromium affect my health?

Chromium(III) is an essential nutrient that helps the body use sugar, protein, and fat.

Breathing high levels of chromium(VI) can cause irritation to the lining of the nose, nose ulcers, runny nose, and breathing problems, such as asthma, cough, shortness of breath, or wheezing. The concentrations of chromium in air that can cause these effects may be different for different types of chromium compounds, with effects occurring at much lower concentrations for chromium(VI) compared to chromium(III).

The main health problems seen in animals following ingestion of chromium(VI) compounds are irritation and ulcers in the stomach and small intestine and anemia. Chromium(III) compounds are much less toxic and do not appear to cause these problems.

Sperm damage and damage to the male reproductive system have also been seen in laboratory animals exposed to chromium(VI).

ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>

Skin contact with certain chromium(VI) compounds can cause skin ulcers. Some people are extremely sensitive to chromium(VI) or chromium(III). Allergic reactions consisting of severe redness and swelling of the skin have been noted.

How likely is chromium to cause cancer?

The Department of Health and Human Services (DHHS), the International Agency for Research on Cancer (IARC), and the EPA have determined that chromium(VI) compounds are known human carcinogens. In workers, inhalation of chromium(VI) has been shown to cause lung cancer. Chromium(VI) also causes lung cancer in animals. An increase in stomach tumors was observed in humans and animals exposed to chromium(VI) in drinking water.

How can chromium affect children?

It is likely that health effects seen in children exposed to high amounts of chromium will be similar to the effects seen in adults.

We do not know if exposure to chromium will result in birth defects or other developmental effects in people. Some developmental effects have been observed in animals exposed to chromium(VI).

How can families reduce the risks of exposure to chromium?

- Children should avoid playing in soils near uncontrolled hazardous waste sites where chromium may have been discarded.
- Chromium is a component of tobacco smoke. Avoid smoking in enclosed spaces like inside the home or car in order to limit exposure to children and other family members.
- Although chromium(III) is an essential nutrient, you should avoid excessive use of dietary supplements containing chromium.

Is there a medical test to determine whether I've been exposed to chromium?

Since chromium(III) is an essential element and naturally occurs in food, there will always be some level of chromium in your body. Chromium can be measured in hair, urine, and blood.

Higher than normal levels of chromium in blood or urine may indicate that a person has been exposed to chromium. However, increases in blood and urine chromium levels cannot be used to predict the kind of health effects that might develop from that exposure.

Has the federal government made recommendations to protect human health?

The EPA has determined that exposure to chromium in drinking water at concentrations of 1 mg/L for up to 10 days is not expected to cause any adverse effects in a child.

The FDA has determined that the chromium concentration in bottled drinking water should not exceed 1 mg/L.

The Occupational Health and Safety Administration (OSHA) has limited workers' exposure to an average of 0.0005 mg/m³ chromium(VI), 0.5 mg/m³ chromium(III), and 1.0 mg/m³ chromium(0) for an 8-hour workday, 40-hour workweek.

References

Agency for Toxic Substances and Disease Registry (ATSDR). 2008. Toxicological Profile for Chromium (Draft for Public Comment). Atlanta, GA: U.S. Department of Public Health and Human Services, Public Health Service.

Where can I get more information? For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology and Environmental Medicine, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-800-232-4636, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



ATTACHMENT B
WEST NILE VIRUS/ST. LOUIS ENCEPHALITIS PREVENTION

WEST NILE VIRUS/ST. LOUIS ENCEPHALITIS PREVENTION

The following section is based upon information provided by the Center for Disease Control (CDC) Division of Vector-Borne Infectious Diseases. Symptoms of West Nile Virus include fever, headache, and body aches, occasionally with skin rash and swollen lymph glands, with most infections being mild. More severe infection may be marked by headache, high fever, neck stiffness, stupor, disorientation, coma, tremors, convulsions, muscle weakness, paralysis, and, rarely, death. Most infections of St. Louis encephalitis are mild without apparent symptoms other than fever with headache. More severe infection is marked by headache, high fever, neck stiffness, stupor, disorientation, coma, tremors, occasional convulsions (especially infants) and spastic (but rarely flaccid) paralysis. The only way to avoid infection of West Nile Virus and St. Louis Encephalitis is to avoid mosquito bites. To reduce the chance of mosquito contact:

- Stay indoors at dawn, dusk, and in the early evening.
- Wear long-sleeved shirts and long pants whenever you are outdoors.
- Spray clothing with repellents containing permethrin or DEET (N, N-diethyl-meta-toluamide), since mosquitoes may bite through thin clothing.
- Apply insect repellent sparingly to exposed skin. An effective repellent will contain 35% DEET. DEET in high concentrations (greater than 35%) provides no additional protection.
- Repellents may irritate the eyes and mouth.
- Whenever you use an insecticide or insect repellent, be sure to read and follow the manufacturer's directions for use, as printed on the product.

ATTACHMENT C
REPORT FORMS

WEEKLY SAFETY REPORT FORM

Week Ending: _____ Project Name/Number: Atlantic Chestnut – Lot

Report Date: _____ Project Manager Name: Deborah Shapiro/Amy Jordan

Summary of any violations of procedures occurring that week:

Summary of any job related injuries, illnesses, or near misses that week:

Summary of air monitoring data that week (include and sample analyses, action levels exceeded, and actions taken):

Comments:

Name: _____ Company: _____

Signature: _____ Title: _____

INJURED - ILL:

Name: _____ SSN: _____

Address: _____ Age: _____

Length of Service: _____ Time on Present Job: _____

Time/Classification: _____

SEVERITY OF INJURY OR ILLNESS:

___ Disabling ___ Non-disabling ___ Fatality

___ Medical Treatment ___ First Aid Only

ESTIMATED NUMBER OF DAYS AWAY FROM JOB: _____

NATURE OF INJURY OR ILLNESS: _____

CLASSIFICATION OF INJURY:

- | | | |
|--------------------|-----------------------|----------------------------|
| ___ Abrasions | _____ Dislocations | _____ Punctures |
| ___ Bites | _____ Faint/Dizziness | _____ Radiation Burns |
| ___ Blisters | _____ Fractures | _____ Respiratory Allergy |
| ___ Bruises | _____ Frostbite | _____ Sprains |
| ___ Chemical Burns | _____ Heat Burns | _____ Toxic Resp. Exposure |
| ___ Cold Exposure | _____ Heat Exhaustion | _____ Toxic Ingestion |
| ___ Concussion | _____ Heat Stroke | _____ Dermal Allergy |
| ___ Lacerations | | |

Part of Body Affected: _____

Degree of Disability: _____

Date Medical Care was Received: _____

Where Medical Care was Received: _____

Address (if off-site): _____

(If two or more injuries, record on separate sheets)

PROPERTY DAMAGE:

Description of Damage: _____

Cost of Damage: \$ _____

ACCIDENT/INCIDENT LOCATION: _____

ACCIDENT/INCIDENT ANALYSIS: Causative agent most directly related to accident/incident
(Object, substance, material, machinery, equipment, conditions)

Was weather a factor?: _____

Unsafe mechanical/physical/environmental condition at time of accident/incident (Be specific):

Personal factors (Attitude, knowledge or skill, reaction time, fatigue):

ON-SITE ACCIDENTS/INCIDENTS:

Level of personal protection equipment required in Site Safety Plan:

Modifications:

Was injured using required equipment?:

If not, how did actual equipment use differ from plan?:

ACTION TAKEN TO PREVENT RECURRENCE: (Be specific. What has or will be done? When will it be done? Who is the responsible party to insure that the correction is made?)

ACCIDENT/INCIDENT REPORT REVIEWED BY:

SSO Name Printed

SSO Signature

OTHERS PARTICIPATING IN INVESTIGATION:

Signature

Title

Signature

Title

Signature

Title

ACCIDENT/INCIDENT FOLLOW-UP: Date: _____

Outcome of accident/incident: _____

Physician's recommendations: _____

Date injured returned to work: _____
Follow-up performed by: _____

Signature

Title

ATTACH ANY ADDITIONAL INFORMATION TO THIS FORM

ATTACHMENT D
EMERGENCY HAND SIGNALS

EMERGENCY SIGNALS

In most cases, field personnel will carry portable radios for communication. If this is the case, a transmission that indicates an emergency will take priority over all other transmissions. All other site radios will yield the frequency to the emergency transmissions.

Where radio communications is not available, the following air-horn and/or hand signals will be used:

EMERGENCY HAND SIGNALS

OUT OF AIR, CAN'T BREATHE!



Hand gripping throat

**LEAVE AREA IMMEDIATELY,
NO DEBATE!**

(No Picture) Grip partner's wrist or place both hands around waist

NEED ASSISTANCE!



Hands on top of head

**OKAY! – I'M ALL RIGHT!
- I UNDERSTAND!**




Thumbs up

NO! - NEGATIVE!



Thumbs down

FIGURE

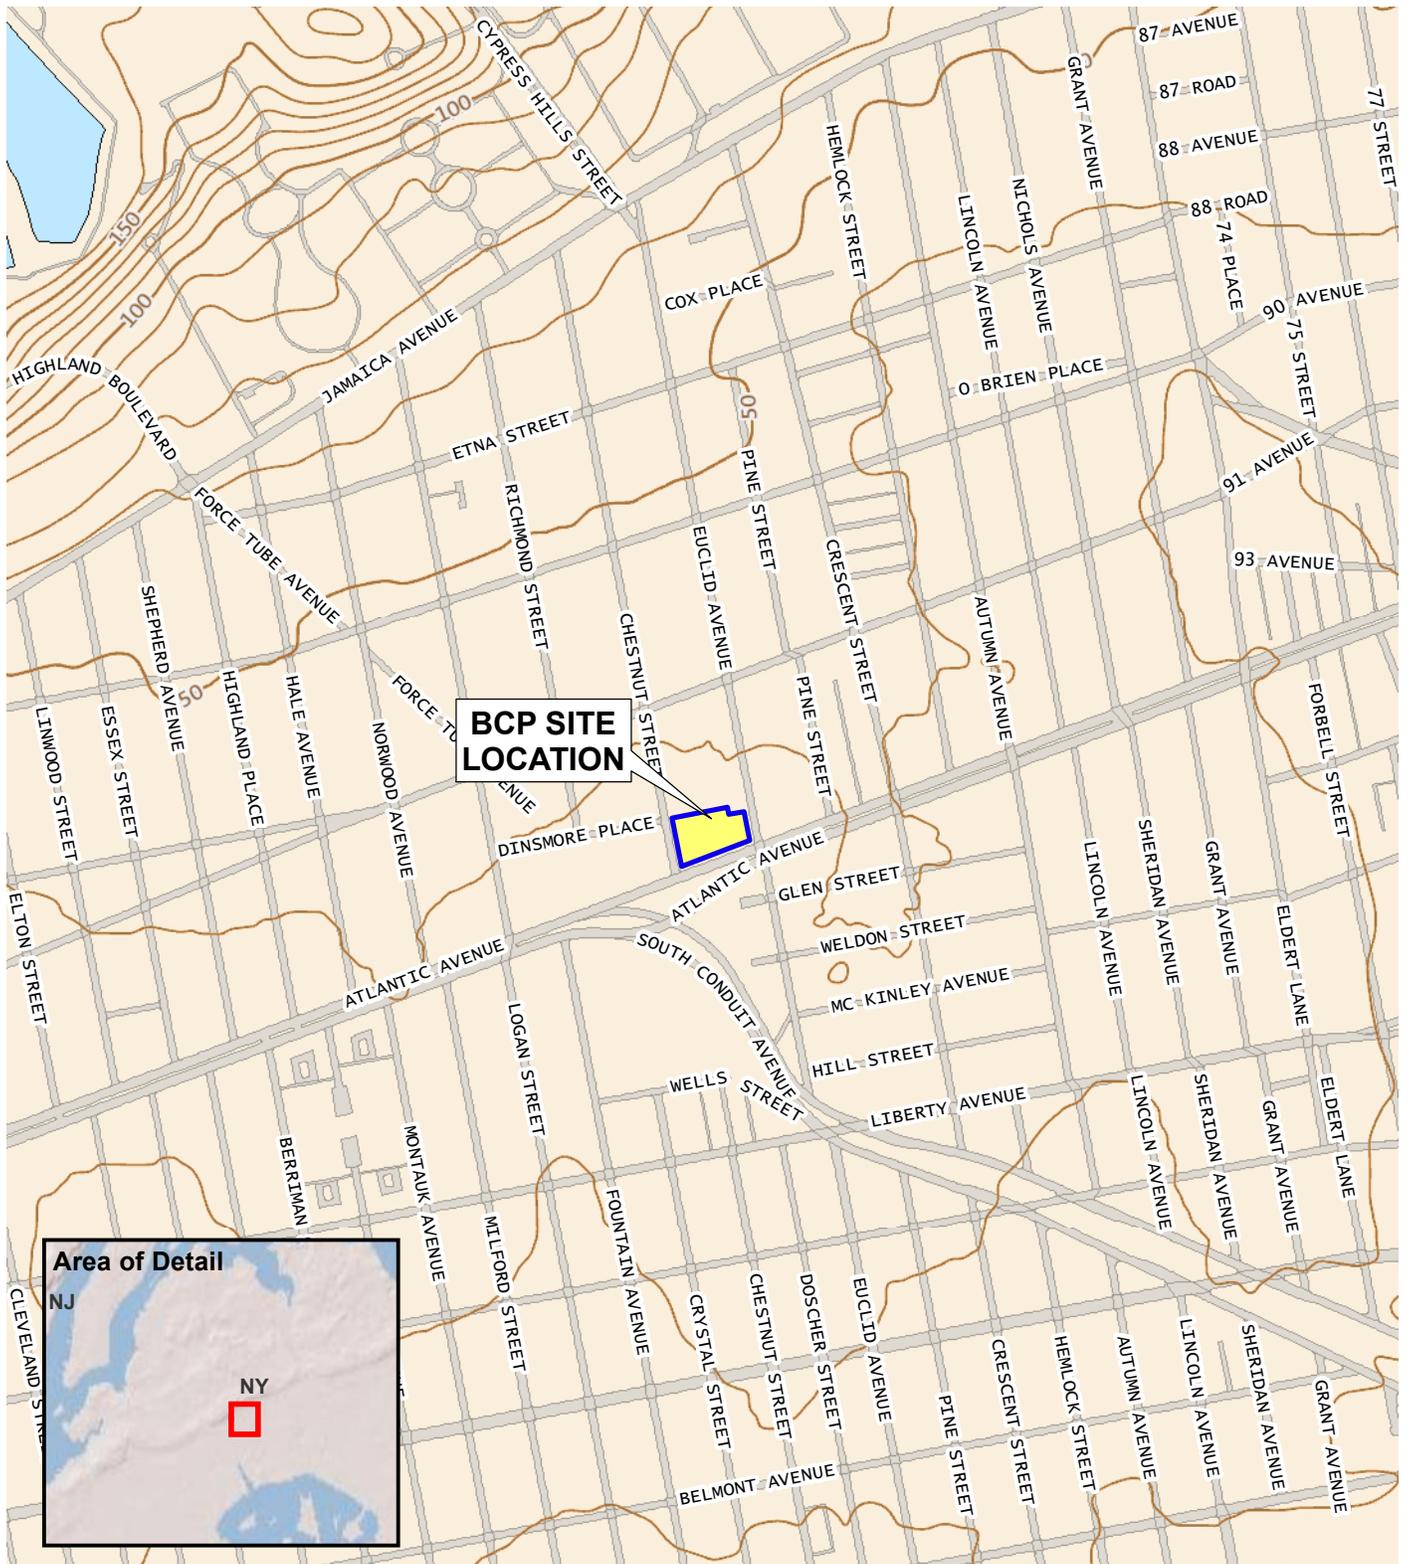

Map Source: USGS Topo base map service from The National Map



© 2018 AKRF. W:\Projects\12184 - PHIPPS.3301 ATLANTIC\Technical\GIS and Graphics\azh\mat12184.Fig.1 Site Loc Map.mxd/4/2018 7:50:43 AM mveilleux



440 Park Avenue South, New York, NY 10016

Atlantic Chestnut - Lot 3
275 Chestnut Street
 Brooklyn, New York

BROWNFIELD CLEANUP PROGRAM SITE LOCATION

DATE	6/4/2018
PROJECT NO.	12184
FIGURE	1



AKRF
440 Park Avenue South, New York, NY 10016

Atlantic Chestnut - Lot 3
275 Chestnut Street
Brooklyn, New York

HOSPITAL LOCATION MAP

DATE	6/4/2018
PROJECT NO.	12184
FIGURE	2

APPENDIX B
QUALITY ASSURANCE PROJECT PLAN (QAPP)

**ATLANTIC CHESTNUT – LOT 3
275 CHESTNUT STREET
BROOKLYN, NEW YORK**

Quality Assurance Project Plan

**AKRF Project Number: 12184
BCP Site Number: C224236**

Prepared for:

NYSDEC Region 2
1 Hunter's Point Plaza
47-40 21st Street
Long Island City, New York 11101

On Behalf Of:

Atlantic Chestnut Affordable Housing LLC
902 Broadway, 13th Floor
New York, New York 10010

Prepared by:



AKRF, Inc.
440 Park Avenue South
New York, New York 10016
(212) 696-0670

JUNE 2018

TABLE OF CONTENTS

1.0	INTRODUCTION	1
2.0	PROJECT TEAM	1
2.1	Quality Assurance/Quality Control (QA/QC) Officer.....	1
2.2	Remedial Engineer	1
2.3	Project Manager/Project Director.....	1
2.4	Deputy Project Manager.....	1
2.5	Field Team Leader, Field Technician, and Site Safety Officer (SSO)	2
2.6	Laboratory Quality Assurance/Quality Control (QA/QC) Officer	2
3.0	STANDARD OPERATING PROCEDURES (SOPs).....	2
3.1	Soil Vapor Extraction (SVE) Well Installation	2
3.2	Decontamination of Sampling Equipment.....	3
3.3	Management of Investigation-Derived Waste (IDW)	3
4.0	Field Testing PROCEDURES	3
4.1	Soil Vapor Extraction (SVE) Pilot Test.....	3
5.0	SAMPLING AND LABORATORY PROCEDURES	3
5.1	Soil Vapor Sampling	3
5.2	Laboratory Methods	4
5.3	Sample Handling	4
5.3.1	Sample Identification	4
5.4	Field Instrumentation.....	5

TABLES

Table 1 –	Laboratory Analytical Methods
Table 2 –	Sample Nomenclature

ATTACHMENT

Attachment A –	Project Team Resumes
----------------	----------------------

1.0 INTRODUCTION

This Quality Assurance Project Plan (QAPP) describes the protocols and procedures that will be followed during implementation of the Interim Remedial Measure (IRM) under the IRM Work Plan (IRMWP) at the Atlantic Chestnut – Lot 3 site, located at 275 Chestnut Street in Brooklyn, New York, hereafter referred to as the “Site”. The Site is identified on the New York City Tax Map as Brooklyn Tax Block 4143, Lot 3. Historically, Lot 1 encompassed the entirety of Block 4143, but was apportioned into three lots (Lots 1, 2, and 3) in 2016.

The objective of this QAPP is to provide for Quality Assurance (QA) and maintain Quality Control (QC) during the IRM under the New York State Department of Environmental Conservation (NYSDEC) oversight in the Brownfield Cleanup Program (BCP) (BCP Site No. C224235). Adherence to this QAPP will ensure that defensible data will be obtained during IRM implementation at the Site.

2.0 PROJECT TEAM

The project team will be drawn from AKRF professional and technical personnel, and AKRF’s subcontractors. All field personnel and subcontractors will have completed a 40-hour training course and updated 8-hour refresher course that meet the Occupational Safety and Health Administration (OSHA) requirements of 29 CFR Part 1910. The following sections describe the key project personnel and their responsibilities.

2.1 Quality Assurance/Quality Control (QA/QC) Officer

Marcus Simons will serve as the QA/QC officer and will be responsible for adherence to this QAPP. The QA/QC officer will review the procedures with all personnel prior to commencing any fieldwork and will conduct periodic Site visits to assess implementation of the procedures. Mr. Simons’ resume is included in Attachment A.

2.2 Remedial Engineer

Michelle Lapin, P.E. will serve as the remedial engineer. As the remedial engineer, Ms. Lapin will oversee the design of the IRM and oversee all startup, maintenance, and operation of the SVE system. Ms. Lapin’s resume is included in Attachment A.

2.3 Project Manager/Project Director

Deborah Shapiro, QEP will serve as the project manager. The project manager will be responsible for directing and coordinating all elements of the RAWP. The project manager will prepare reports and participate in meetings with the Site owner/Volunteer, and/or the NYSDEC. As project director, Ms. Shapiro will also be responsible for the general oversight of all aspects of the project, including scheduling, budgeting, data management, and field program decision-making. The project director will communicate regularly with all members of the AKRF and NYSDEC project teams to ensure a smooth flow of information between involved parties. Ms. Shapiro’s resume is included in Attachment A.

2.4 Deputy Project Manager

Amy Jordan will serve as the deputy project manager. The deputy project manager will be responsible for assisting the project manager. The deputy project manager will help prepare reports and will participate in meetings with the Site owner/Volunteer, and/or the NYSDEC. Ms. Jordan’s resume is included in Attachment A.

2.5 Field Team Leader, Field Technician, and Site Safety Officer (SSO)

The field team leader will be responsible for supervising the daily sampling and health and safety activities in the field and will ensure adherence to the work plan and Health and Safety Plan (HASP), included as Appendix A. The field team leader will also act as the field technician and SSO, and will report to the project manager or project manager alternate on a regular basis regarding daily progress and any deviations from the work plan. The field team leader will be a qualified and responsible person able to act professionally and promptly during environmental work at the Site. George Kokaliaris will be the field team leader and the field team leader alternate will be Victor Chang. Mr. Kokaliaris' and Mr. Chang's, resumes are included in Attachment A.

2.6 Laboratory Quality Assurance/Quality Control (QA/QC) Officer

The laboratory QA/QC officer will be responsible for quality control procedures and checks in the laboratory and ensuring adherence to laboratory protocols. The QA/QC officer will track the movement of samples from the time they are checked in at the laboratory to the time that analytical results are issued, and will conduct a final check on the analytical calculations and sign off on the laboratory reports. The laboratory QA/QC officer will be Nick Straccione of SGS Accutest Inc. (Accutest), the New York State Department of Health (NYSDOH) Environmental Laboratory Accreditation Program (ELAP)-certified laboratory being employed for all environmental sampling at the Site.

3.0 STANDARD OPERATING PROCEDURES (SOPS)

The following sections describe the SOPs for the remedial activities included in the IRMWP. During these operations, safety monitoring will be performed as described in the HASP, included as Appendix A of the IRMWP.

3.1 Soil Vapor Extraction (SVE) Well Installation

The SVE wells will be installed according to the following procedure:

Advance borings using a hollow-stem auger (HSA) truck-mounted rotary rig with 6.25-inch outside diameter augers.

- Install a 4-inch diameter Schedule 40 polyvinyl chloride (PVC) pipe, with a length of 0.020-inch slotted screen and solid riser into the borehole through the hollow-stem auger.
- Install No. 2 sand filter pack around the well screen to a depth of 2 feet above the top of the screen.
- Install a bentonite seal to a depth of 2 feet above the filter pack and a non-shrinking cement/grout mixture to grade.
- Backfill the remainder of the annular space using a bentonite-cement grout.
- Complete the well with a locking cap flush-with-grade curb box set in concrete. Install a concrete apron around the curb box to direct run-off away from the well.
- Decontaminate the augers prior to and following installation of each well as described in Section 3.2 of this QAPP.
- Document well installation data (location, depth, construction details, etc.) in the field logbook or on field data sheets.

3.2 Decontamination of Sampling Equipment

All equipment will be either dedicated or decontaminated between sampling locations. Decontamination will be conducted to prevent discharge to the ground. The decontamination procedure will be as follows:

1. Scrub using tap water/Alconox[®] mixture and bristle brush.
2. Rinse with tap water.
3. Scrub again with tap water/Alconox[®] mixture and bristle brush.
4. Rinse with tap water.
5. Rinse with distilled water.
6. Air-dry the equipment, if possible.

3.3 Management of Investigation-Derived Waste (IDW)

IDW will be containerized in New York State Department of Transportation (NYSDOT)-approved 55-gallon drums. The drums will be sealed at the end of each work day and labeled with the date, the excavation grid(s), the type of waste (i.e., drill cuttings), and the name and phone number of an AKRF point of contact. All IDW will be disposed of or treated according to applicable local, state, and federal regulations.

4.0 FIELD TESTING PROCEDURES

4.1 Soil Vapor Extraction (SVE) Pilot Test

The SVE pilot test will consist of extracting vapor from the one SVE pilot test well and measuring the resulting vacuum response at monitoring points at varying distances and directions. Testing will be conducted according to the following procedure:

1. Connect a skid-mounted regenerative blower equipped with a moisture separator, a flow meter, and a vacuum gauge to one of the SVE pilot test well, using a two-inch diameter vacuum hose. A granular-activated carbon (GAC) vessel will be used to control VOC emissions to the atmosphere during the test.
2. Attach a magnahelic gauge to the pilot test SVE well (L3-SVE-5).
3. Adjust the applied vacuum at L3-SVE-5 to 2 inches of mercury (inHg) by bleeding in ambient air through a bypass valve.
4. Measure the vacuum, flow rate, and effluent vapor concentrations at each observation well and L3-SVE-5.
5. Continue the test until a steady state has been reached.
6. Repeat steps 1 through 5 at an applied vacuum pressure of 1 inHg.

5.0 SAMPLING AND LABORATORY PROCEDURES

5.1 Soil Vapor Sampling

Soil vapor sampling will be conducted according to the following procedures:

- Field screen the sample for evidence of contamination (e.g., odors, staining,) using visual and olfactory methods and screen for volatile organic compounds (VOCs) using a photoionization detector (PID) equipped with an 11.7 electron Volt (eV) lamp.
- Collect sample in laboratory-supplied container, label the sample in accordance with Section 5.3.1 of this QAPP, and place in a container for shipment to the laboratory.

- Complete the proper chain of custody (COC) paperwork and seal the container.
- Record observations (evidence of contamination, PID readings, etc.) in field log book and boring log data sheet, if applicable.
- Decontaminate equipment between sample locations as described in Section 3.2 of this QAPP.

5.2 Laboratory Methods

Table 1 summarizes the laboratory methods that will be used to analyze field samples and the sample container type, preservation, and applicable holding times. SGS of Dayton, New Jersey, a NYSDOH ELAP-certified laboratory subcontracted to AKRF, will be used for all chemical analyses in accordance with the Division of Environmental Remediation (DER)-10 2.1(b) and 2.1(f) with Category B Deliverables.

Table 1
Laboratory Analytical Methods

Matrix	Analysis	EPA Method	Bottle Type	Preservative	Hold Time
Soil Vapor	CVOCs	TO-15	Tedlar™ Bag	None	14 days

5.3 Sample Handling

5.3.1 Sample Identification

All samples will be consistently identified in all field documentation, COC documents, and laboratory reports. All samples will be amended with the collection date at the end of the sample name in a year, month, day (YYYYMMDD) format. Special characters, including primes/apostrophes (’), will not be used for sample nomenclature.

Sample Labeling and Shipping

All sample containers will be provided with labels containing the following information:

- Project identification, including Site name, BCP Site number, Site address
- Sample identification
- Date and time of collection
- Analysis(es) to be performed
- Sampler’s initials

Once the samples are collected and labeled, they will be placed in coolers and stored in a cool area away from direct sunlight to await shipment to the laboratory. All samples will be shipped to the laboratory at least twice per week.

The samples will be prepared for shipment by placing each sample in laboratory-supplied containers and into cartons for shipment to the laboratory. The COC will be properly completed by the sampler in ink, and all sample shipment transactions will be documented with signatures, and the date and time of custody transfer. Samples will be shipped overnight (e.g., Federal Express) or transported by a laboratory courier. All coolers shipped to the laboratory will be sealed with mailing tape and a COC seal to ensure that the samples remain under strict COC protocol.

Sample Custody

Field personnel will be responsible for maintaining the sample coolers in a secured location until they are picked up and/or sent to the laboratory. The record of possession

of samples from the time they are obtained in the field to the time they are delivered to the laboratory or shipped off-site will be documented on the COC. The COC will contain the following information: project name; names of sampling personnel; sample number; date and time of collection and matrix; and signatures of individuals involved in sample transfer, and the dates and times of transfers. Laboratory personnel will note the condition of the custody seal and sample containers at sample check-in.

5.4 Field Instrumentation

Field personnel will be trained in the proper operation of all field instruments at the start of the field program. Instruction manuals for the equipment will be on file at the Site for referencing proper operation, maintenance, and calibration procedures. The equipment will be calibrated according to manufacturer specifications at the start of each day of fieldwork. If an instrument fails calibration, a replacement instrument will be obtained as soon as possible. A calibration log will be maintained to record the date of each calibration, including any failure to calibrate and corrective actions taken. The PID will be equipped with an 11.7 electron volt (eV) lamp and will be calibrated each day using 100 parts per million (ppm) isobutylene standard gas in accordance with the manufacturer's standards.

ATTACHMENT A

**RESUMES OF QA/QC OFFICER, REMEDIAL ENGINEER, PROJECT DIRECTOR/PROJECT MANAGER,
DEPUTY PROJECT MANAGER, AND FIELD TEAM LEADER**

MARCUS SIMONS

SENIOR VICE PRESIDENT

Marcus Simons is a Senior Vice President of AKRF with more than 25 years of environmental consulting experience, specializing in the assessment and cleanup of contaminated sites, including federal and state superfund, RCRA, TSCA, brownfield, voluntary cleanup and spill sites. His expertise includes health risk assessment, development of sampling plans, economic evaluations of remedial alternatives, and regulatory analysis. He is also AKRF's Health and Safety Officer with extensive experience of Hazardous Waste Operations and Emergency Response Standard (HAZWOPER) issues during sampling and remediation of contaminated sites.

Mr. Simons directs much of AKRF environmental due diligence work (recently managing environmental due diligence for the Peter Cooper/Stuyvesant Town acquisition, reportedly the largest real estate transaction in US history), including supervising preparation of numerous Phase I and Phase II Environmental Site Assessments, as well as more complex multi-site and litigation-related projects. Mr. Simons manages preparation of the contaminated-materials portions of AKRF's Environmental Impact Statements and Environmental Assessments and has experience with procedures for hazardous material requirements under NEPA and New York SEQRA/CEQR, E-designation, BCP and VCP programs. He also has extensive experience in statistics, selection of sites for controversial facilities, and federal and state wetland regulations and waterfront permitting. In addition to analytical work, Mr. Simons has considerable experience in presenting results to regulatory agencies and the general public.

Mr. Simons has managed some of the most complex cleanup sites in New York State including: the cleanup of a 12-acre PCB-contaminated former utility property in Flushing, Queens where a 3 million square foot retail/residential building was constructed (remediation was performed under the State Brownfield Cleanup Program, though the site was also subject to City jurisdiction under its E-Designation program); cleanup of the nation's largest former dental factory in Staten Island for reuse as single family housing; the investigation of several former manufactured gas plants; and the investigation and remediation associated with the reconstruction of the West Side Highway and Hudson River Park in Manhattan (from the Battery to 59th Street), Brooklyn Bridge Park, and Governors Island. Mr. Simons also has extensive experience with transportation projects (Second Avenue Subway, MTA/LIRR East Side Access, 7-Train Extension, Cross Harbor Freight Movement Study, Route 9A Reconstruction), large-scale rezoning projects (Long Island City, Greenpoint/Williamsburg, Downtown Brooklyn, Jamaica) and public and private redevelopment work (World Trade Center Reconstruction, The New York Wheel, Atlantic Yards, School Construction Authority, Queens West)

BACKGROUND

Education

M.S., Engineering and Public Policy, Carnegie-Mellon University, 1988

M.A. and B.A. (Honors), Mathematics/Engineering, Cambridge University, England, 1986

Certifications

Hazardous Waste Operations and Emergency Response Standard (HAZWOPER) – 40 Hour Site Worker and 8 Hour Site Supervisor

Years of Experience

Year started in company: 1995

Year started in industry: 1988



MARCUS SIMONS

SENIOR VICE PRESIDENT

| p. 2

RELEVANT EXPERIENCE

CE Flushing Site, Flushing, NY

Mr. Simons directed the remediation of a former industrial site in Flushing, Queens, NY prior to its redevelopment as a 3 million square foot retail/residential complex. The property was cleaned up under the NYS Department of Environmental Conservation Brownfield Cleanup Program and the NYC Department of Environmental Protection's E-Designation requirements. The remedial measures included the removal of aboveground and underground storage tanks, excavation and off-site disposal of TSCA, RCRA and non-hazardous wastes, NAPL removal, and removal and investigation of on-site drainage structures. The remediation and subsequent construction involved obtaining (or obtaining waivers from) numerous permits including those for NYSDEC Tidal Wetlands, NYSDEC Long Island Wells, NYSDEC SPDES/Stormwater and NYCDEP Sewer Use.

Peter Cooper Village/Stuyvesant Town, New York, NY

Mr. Simons directed environmental due diligence efforts for the two most recent purchasers of this 80-acre property in Manhattan. Much of the 110-building complex is underlain by former manufactured gas plants and Con Edison entered the site into NYSDEC's Voluntary Cleanup Program. Going forward Mr. Simons manages oversight of activities that involve disturbance of MGP-contaminated soils, as well as future testing and potentially remediation.

The New York Wheel, Staten Island, NY

Mr. Simons directed the hazardous materials environmental review for the project which is being built on the site of an old railyard and is subject to both NYSDEC Brownfield Cleanup Program and NYCDEP remediation requirements. Remediation of the site is being performed during the ongoing construction.

Governors Island, New York, NY

Mr. Simons directed the hazardous materials environmental review for the project which involves converting one of the nation's oldest military bases to primarily park usage. In addition to managing the hazardous materials environmental review for the project's approvals, Mr. Simons developed testing requirements for the millions of yards of imported and reused soils/materials necessary to create the new park's topography and landscape.

MTA New York City Transit Manhattan East Side Transit Alternative (MESA)/Second Avenue Subway, New York, NY

Mr. Simons directed the contaminated material assessment for this multi-billion dollar transit initiative that would provide subway service to Manhattan's East Side. The assessment identified several hundred facilities along the alignment that could have impacted soil and/or groundwater and could require special materials handling and enhanced health and safety procedures. Additional evaluation of these sites is underway.

Ferry Point Park, Bronx, NY

Mr. Simons developed the material acceptance criteria (soil standards for capping materials) for the development of Ferry Point Park (including a golf course) in the Bronx. The New York City Department of Environmental Protection DEP and the New York State Departments of Health (DOH) and Environmental Conservation (DEC) agreed for the first time to relax their then strict (TAGM 4046) criteria for clean soil, based on statistical analyses of background conditions and risk-based modeling.

Prince's Point, Staten Island, NY

Mr. Simons managed the complex cleanup (including the relocation of a contaminated tidal creek) of the nation's largest former dental factory site on Staten Island's waterfront. The site was on the State Superfund list. The future use of the site as single-family residential property entailed extensive negotiations with NYSDEC and NYSDOH. The project required obtaining (or obtaining waivers from) numerous permits including those for NYSDEC Tidal



MARCUS SIMONS

SENIOR VICE PRESIDENT

| p. 3

and Fresh Water Wetlands, USACOE (Nationwide) Permits, NYSDEC Coastal Erosion Hazard Area, NYSDEC SPDES and Stormwater, FEMA Modifications to Land in Floodplain, and USEPA Notification of PCB Waste Activity.

Route 9A Reconstruction, New York, NY

AKRF directed extensive studies for the reconstruction in Lower Manhattan proposed by the New York State Department of Transportation (NYSDOT) in cooperation with the Federal Highway Administration (FHWA). The project is arguably the most complex environmental analyses performed for a federally funded transportation project in New York City in the last 10 years. The firm was responsible for all environmental tasks as well as the preparation for the Draft, Supplementary, and Final Environmental Impact Statements (EISs) and Section 4(f) Evaluation for this 5-mile \$250 million reconstruction of Route 9A as part of the recovery effort following the events of September 11th, 2001. Mr. Simons managed the extensive hazardous materials investigations and prepared the contract specifications for contaminated soil and tank removal, including Health and Safety oversight.

Hudson River Park, New York, NY

Mr. Simons is managing hazardous materials issues for the ongoing Hudson River Park construction, located adjacent to the Route 9A roadway. Construction is ongoing and Mr. Simons directs health and safety oversight and remediation during construction.

Jamaica Rezoning, Queens, NY

As part of the preparation of an Environmental Impact Statement, Mr. Simons managed the hazardous materials assessment of a multi-block area. In addition to conducting the assessment, Mr. Simons made recommendation as to the properties where "E-Designations" (city-recorded institutional controls on future development) should be placed.

Outlet City, Long Island City, Queens, NY

In Long Island City, Mr. Simons managed the investigation and interim remediation of an old factory complex where large volumes of creosote were spilled. The investigations and interim remedial measures (IRMs) took place under the New York State's Voluntary Cleanup Program (VCP).

MTA/LIRR East Side Access Project, New York, NY

Mr. Simons managed the hazardous materials investigations for multiple sites in the Bronx, Manhattan, and Queens associated with the Environmental Impact Statement (EIS) for the Long Island Rail Road connection to Grand Central Terminal. Mr. Simons continues to be involved in health and safety oversight related to the construction of the project.

New York City Department of Transportation, Lead Paint Removal and Disposal on Bridges Project, New York, NY

Mr. Simons conducted a regulatory analysis of related to the removal of lead paint from nearly 800 bridges. This analysis included an evaluation of the regulatory compliance of various proposed procedures with federal and state hazardous and solid waste management requirements.

American Felt and Filter Company, New Windsor, NY

Mr. Simons prepared a Remedial Investigation (including exposure assessment) and Feasibility Study for the country's oldest active felt manufacturing facility, located in Orange County. This solvent-contaminated site is on the State Superfund List.



MICHELLE LAPIN, P.E.

SENIOR VICE PRESIDENT

Michelle Lapin is a Senior Vice President with more than 25 years of experience in the assessment and remediation of hazardous waste issues. She leads the firm's Hazardous Materials group and offers extensive experience providing strategic planning and management for clients. Ms. Lapin has been responsible for the administration of technical solutions to contaminated soil, groundwater, air and geotechnical problems. Her other duties have included technical and report review, proposal writing, scheduling, budgeting, and acting as liaison between clients and regulatory agencies, and project coordination with federal, state, and local authorities.

Ms. Lapin's hydrogeologic experience includes groundwater investigations, formulation and administration of groundwater monitoring programs and remediation throughout the Northeast. Her experience with groundwater contamination includes Level B hazardous waste site investigations; leaking underground storage tank studies, including hazardous soil removal and disposal and associated soil and water issues; soil gas/vapor intrusion surveys; and wetlands issues. Ms. Lapin is experienced in coordinating and monitoring field programs concerning hazardous waste cell closures. She has directed hundreds of Phase I, Phase II, and Phase III investigations and remediations, many of them in conjunction with developers, law firms, lending institutions, and national retail chains. She is also experienced in the cleanup of contaminated properties under Brownfield Cleanup Program (BCP) regulations.

BACKGROUND

Education

M.S., Civil Engineering, Syracuse University, 1985

B.S., Civil Engineering, Clarkson University, 1983

Professional Licenses/Certifications

New York State P.E.

State of Connecticut P.E.

Professional Memberships

Member, National Society of Professional Engineers (NSPE), National and CT Chapters

Member, American Society of Civil Engineers (ASCE), National and CT Chapters

Member, Connecticut Business & Industry Association (CBIA), CBIA Environmental Policies Council (EPC)

Member, Environmental Professionals' Organization of Connecticut (EPOC)

Board Member, New York City Brownfield Partnership

Years of Experience

Year started in company: 1994

Year started in industry: 1986

RELEVANT EXPERIENCE

West 61st Street Rezoning/Residential Development, New York, NY

Ms. Lapin is directing the firm's hazardous materials work for this mixed-use development in Manhattan. The Algin Management Company hired AKRF to prepare an environmental impact statement (EIS) for the proposed rezoning of the western portion of the block between West 60th and 61st Streets, between Amsterdam and West



MICHELLE LAPIN, P.E.

SENIOR VICE PRESIDENT

| p. 2

End Avenues. The purpose of the proposed action was to facilitate the development of two 30-story residential towers with accessory parking spaces, and landscaped open space. The EIS examined a “worst case” condition for rezoning the block, which allowed Algin to build a residential building of approximately 375,000 square feet at their site. The building now contains 475 apartments, 200 accessory parking spaces, a health club, and community facility space. This site, with the services of AKRF, entered into New York State’s Brownfield Cleanup Program (BCP). On-site issues included underground storage tanks remaining from previous on-site buildings, petroleum contamination from these tanks and possibly from off-site sources, and other soil contaminants (metals, semi-volatile organic compounds, etc.) from fill materials and previous on-site buildings. AKRF oversaw the adherence to the Construction Health and Safety Plan (HASP), which was submitted to and approved by the New York State Department of Environmental Conservation (NYSDEC), and monitored the waste streams, to ensure that the different types of waste were disposed of at the correct receiving facilities. This oversight also included confirmation and characteristic soil sampling for the receiving facilities and NYSDEC. A “Track 1” Clean up of the majority of the property (the portion including the buildings) was completed and the final Engineering Report was approved by the NYSDEC. AKRF has also completed a smaller portion of the property as a “Track 4” cleanup, which includes a tennis court and landscaped areas.

Hudson River Park, New York, NY

Ms. Lapin is directing AKRF’s hazardous materials work during construction of Hudson River Park, a five-mile linear park along Manhattan’s West Side. As the Hudson River Park Trust’s (HRPT’s) environmental consultant, AKRF is overseeing preparation and implementation of additional soil and groundwater investigations (working with both NYSDEC and the New York City Department of Environmental Protection (NYCDEP)), all health and safety activities, and removal of both known underground storage tanks and those encountered during construction. Previously, the firm performed hazardous materials assessments as part of the environmental impact statement (EIS) process, including extensive database and historical research, and soil and groundwater investigations. Ms. Lapin has been the senior consultant for the soil and groundwater investigations and remediation, and the asbestos investigations and abatement oversight.

Roosevelt Union Free School District – District-wide Improvement Program, Roosevelt, NY

Ms. Lapin managed the hazardous materials investigation for the Draft and Final EISs for the improvement program, which included the demolition of three existing elementary schools and portions of the junior-senior high school, and the reconstruction of three replacement elementary schools, a separate replacement middle school, and renovations to the high school. Following the EIS, additional hazardous materials investigations were completed, including comprehensive asbestos and lead surveys; Phase I and Phase II Environmental Site Assessments; the preparation of asbestos, lead, hazardous materials and demolition specifications; and obtaining site-specific variances from the New York State Department of Labor (NYS DOL). The middle school remediation was conducted through coordination with the NYSDEC, New York State Department of Health (NYS DOH), the New York State Education Department (NYS ED) and the local school district. After project approval and completion of construction/renovation of the new middle school, the school opened for the Fall 2008 semester as planned. AKRF continues to provide oversight for ongoing abatement at a number of the schools, and overall environmental consulting to the school district.

Fiterman Hall Deconstruction and Decontamination Project, New York, NY

The 15-story Fiterman Hall building, located at 30 West Broadway, originally constructed as an office building in the 1950s, had served as an extension of the City University of New York (CUNY) Borough of Manhattan Community College (BMCC) since 1993. The building was severely damaged during the September 11, 2001, World Trade Center (WTC) attack when 7 WTC collapsed and struck the south façade of the building, resulting in the partial collapse of the southwest corner of the structure. The building was subsequently stabilized, with breaches closed and major debris removed. Because extensive mold and WTC dust contaminants remain within the building, it must be taken down. The project required the preparation of two environmental assessment statements (EASs)—one for the deconstruction and decontamination of Fiterman Hall and one for the construction of a replacement building on the site. AKRF prepared the EAS for the Deconstruction and Decontamination project, which included the decontamination of the interior and exterior of the building, the



MICHELLE LAPIN, P.E.

SENIOR VICE PRESIDENT

| p. 3

removal and disposal of all building contents, and the deconstruction of the existing, approximately 377,000-gross-square-foot partially collapsed structure. Ms. Lapin reviewed the EAS's deconstruction and decontamination plans. The cleanup plan was submitted to the United States Environmental Protection Agency (USEPA).

Columbia University Manhattanville Academic Mixed-Use Development, New York, NY

Ms. Lapin served as Hazardous Materials Task Leader on this EIS for approximately 4 million square feet of new academic, research and neighborhood uses to be constructed north of Columbia University's existing Morningside campus. The Hazardous Materials work included Phase I Environmental Site Assessments for the properties within the site boundaries, and estimates for a Subsurface (Phase II) Investigation of the entire development area. The firm's Hazardous Materials group has performed over 30 individual Phase I Environmental Site Assessments for properties within the development area. In addition, a Preliminary Environmental Site Assessment (PESA) was completed in conjunction with the EIS. Based on the Phase I studies, AKRF conducted a subsurface (Phase II) investigation in accordance with an NYCDEP-approved investigative work plan and health and safety plan. Subsurface activities included the advancement of soil borings, groundwater monitor wells, and the collection of soil and groundwater samples for laboratory analysis. This study estimated costs to remediate contaminated soil, groundwater and hazardous building materials, including lead-based paint and asbestos-containing materials.

Yonkers Waterfront Redevelopment Project, Yonkers, NY

For this redevelopment along Yonkers' Hudson River waterfront, Ms. Lapin headed the remedial investigation and remediation work that included Phase I assessments of 12 parcels, investigations of underground storage tank removals and associated soil remediation, remedial alternatives reports, and remedial work plans for multiple parcels. Several of the city-owned parcels were remediated under a Voluntary Cleanup Agreement; others were administered with state Brownfields grants. Hazardous waste remediation was completed on both brownfield and voluntary clean-up parcels, which enabled construction of mixed-use retail, residential development, and parking.

Dauids Island Site Investigations, New Rochelle, NY

Ms. Lapin managed the hazardous materials investigation of Westchester County's Davids Island, The island, which features pre- and post-Civil War military buildings and parade grounds and is viewed as a major heritage, tourism, and recreational amenity, was planned for county park purposes. The investigation included a Phase I site assessment, with historical research dating to the 17th century, a Phase II (Subsurface) Investigation, underground storage tank investigations, asbestos surveys, and conditions surveys of all remaining structures. Cost estimates were submitted to Westchester County for soil remediation, asbestos abatement, and building demolition.

Site Selection and Installation of 11 Turbine Generators, New York and Long Island, NY

AKRF was retained by the New York Power Authority (NYPA) to assist in the State Environmental Quality Review Act (SEQRA) review of the proposed siting, construction, and operation of 11 single-cycle gas turbine generators in the New York metropolitan area. Ms. Lapin managed the hazardous materials investigation of the sites. The work included Phase I site assessments, subsurface investigations, and construction health and safety plans.

Cross Westchester (I-287) Expressway Phases V and VI, Westchester County, NY

Ms. Lapin served as Project Manager for the New York State Department of Transportation's (NYSDOT) reconstruction of Westchester County's major east-west artery and was responsible for directing the contaminated materials aspect of the final design effort. As part of her duties, she managed the asbestos investigations at eight bridges and wetland delineation along the entire corridor, wrote the scope of work and provided general project management.

Supermarket Redevelopment, New Fairfield, CT

AKRF provided consulting services to the developer and owner of a 9-acre site including conducting a remedial investigation and remediation of a site contaminated from former dry cleaning operations and off-site gasoline spills. The investigation included the installation of monitoring wells in three distinct aquifers, geophysical logging, pump tests, and associated data analysis. Ms. Lapin presented the environmental issues and planned remediation to local and state officials during the early stages of the planning process to incorporate their comments into the final remedial design. A remedial action work plan (RAWP) was completed and approved by the Connecticut



MICHELLE LAPIN, P.E.

SENIOR VICE PRESIDENT

| p. 4

Department of Environmental Protection within a year to enable redevelopment work for a new supermarket and shopping center. The RAWP included the remediation of soil within the source area and a multi-well pump and treat system for the recovery of non-aqueous and dissolved phase contamination in groundwater. The design of the recovery well system included extensive groundwater modeling to ensure capture of the contaminant plume and the appropriate quantity and spacing of the wells. Ms. Lapin directed the soil removal remedial activities and monitoring for additional potential contamination during construction. In addition, AKRF performed comprehensive pre-demolition asbestos and lead-based paint surveys of the former site structures, conducted abatement, air monitoring and oversight, and provided environmental consulting support for the development of the site. The groundwater remediation system was installed during site development and began operation once development was complete.

East 75th/East 76th Street Site, New York, NY

Ms. Lapin served as Senior Manager for this project that encompassed coordination and direct remediation efforts of this former dry cleaning facility and parking garage prior to the sale of the property and its ultimate redevelopment for use as a private school. A preliminary site investigation identified 20 current and former petroleum and solvent tanks on the property. A soil and groundwater testing program was designed and implemented to identify the presence and extent of contamination resulting from potential tank spills. This investigation confirmed the presence of subsurface petroleum contamination in the soil and solvent contamination from former dry cleaning activities in the bedrock. AKRF completed oversight of the remediation under the State's Voluntary Cleanup Program. Remediation, consisting of tank removals and excavation of contaminated soil and the removal of solvent-contaminated bedrock down to 30 feet below grade, has been completed. AKRF completed oversight of the pre-treatment of groundwater prior to discharge to the municipal sewer system and an off-site study to determine impacts to groundwater in downgradient locations.

Home Depot, Various Locations, NY

Ms. Lapin, serving as either Project Manager or Senior Manager, has managed the investigations and remediation at multiple Home Depot sites in the five boroughs, Long Island, and Connecticut. The investigations have included Phase I and II site assessments, asbestos and lead paint surveys, abatement specifications and oversight, and soil and groundwater remediation.

Avalon on the Sound, New Rochelle, NY

For Avalon Bay Communities, Ms. Lapin managed the investigations and remediation of two luxury residential towers and an associated parking garage. Remediation of the first phase of development (the first residential tower and the parking garage) included gasoline contamination from a former taxi facility, fuel oil contamination from multiple residential underground storage tanks, and chemical contamination from former on-site manufacturing facilities. The remediation and closure of the tank spills was coordinated with the New York State Department of Environmental Conservation (NYSDEC). The initial investigation of the Phase II development—an additional high-rise luxury residential building—detected petroleum contamination. A second investigation was conducted to delineate the extent of the contamination and estimate the costs for remediation. AKRF oversaw the remediation and conducted the Health and Safety monitoring. The remediation was completed with closure and approvals of the NYSDEC.

East River Science Park, New York, NY

Originally, New York University School of Medicine (NYUSOM) retained the firm to prepare a full Environmental Impact Statement (EIS) for its proposed East River Science Park (ERSP). As originally contemplated, the proposed complex was to occupy a portion of the Bellevue Hospital campus between East 30th Street and approximately East 28th Street and would have included a clinical practice, research, and biotech facilities, housing units, a child care center, and a conference center and parking.

Ms. Lapin managed the Phase I Environmental Site Assessment and other hazardous materials-related issues. Events relating to September 11, 2001 delayed the project for several years. When it resurfaced with a new developer and a diminished scope, Ms. Lapin updated the hazardous materials issues and consulted with the new



MICHELLE LAPIN, P.E.

SENIOR VICE PRESIDENT

| p. 5

developer regarding remediation strategies and involvement of regulatory agencies. For the actual remediation/development, the city requested oversight by AKRF to represent its interests (the city is retaining ownership of the land). Ms. Lapin completed directing the remediation oversight on behalf of the City of New York for the remediation of this former psychiatric hospital building, laundry building and parking areas. The new 550,000 square-foot development includes a biotechnology center, street level retail, and an elevated plaza.

DEBORAH SHAPIRO, QEP

VICE PRESIDENT

Deborah Shapiro is a Vice President with 17 years of experience in the assessment and remediation of hazardous waste issues. Ms. Shapiro supervises project teams and manages all aspects of assessment and remediation projects. Ms. Shapiro works with developers, non-profit organizations, architects, local community groups, local businesses, and government agencies. Her projects fall under the regulatory oversight of NYSDEC, NYCDEP, and NYCOER including the New York State Brownfield Cleanup Program (BCP), New York City Voluntary Cleanup Program (VCP), NYSDEC petroleum spills program, RCRA/UIC closures, and NYCOER's E-designation program. Ms. Shapiro has also assisted commercial and industrial property owners with maintaining the integrity of their portfolios by providing compliance related cleanup and chemical storage management services.

Ms. Shapiro manages all aspects of redevelopment projects from the initial Phase I ESA, Phase II, and remediation through post-remedial site management. In addition, her experience includes groundwater investigations, monitoring, and sampling programs; Brownfield and hazardous waste site investigations; In-Situ Chemical Oxidation; underground storage tank studies, including soil contamination delineation, classification, removal and disposal; waste characterization sampling; exposure assessments; on-going remedial action (especially AS/SVE), and permitting.

Prior to joining AKRF, Ms. Shapiro was a Senior Project Manager at CA RICH Consultants, Inc. in Plainview, New York. She was responsible for the design, implementation, and management of environmental assessment, investigation and remediation projects on Long Island and across the New York Metropolitan Area. Ms. Shapiro has also been a moderator and panelist at numerous conferences.

BACKGROUND

Education

M.S., Environmental Science, American University, 2001

B.A., Environmental Studies, American University, 1998

Professional Licenses/Certifications

Qualified Environmental Professional

Health and Safety Operations at Hazardous Materials Sites 29 CFR 1910.120

OSHA 10 Hour Occupational Construction Safety and Health

Professional Memberships

Past President, New York City Brownfield Partnership

Board Member, Residents for a More Beautiful Port Washington

Member, Institute of Professional Environmental Practitioners (IPEP)

Awards

Big Apple Brownfield Award recipient as part of the Courtlandt Crescent redevelopment team 2013

Big Apple Brownfield Award recipient as part of the Via Verde redevelopment team 2012

Big Apple Brownfield Award recipient as part of the Cornerstone B1 (LaTerraza) redevelopment team 2011

Years of Experience

Year started in company: 2013

Year started in industry: 1998



DEBORAH SHAPIRO, QEP

VICE PRESIDENT

| p. 2

Relevant Experience

Elton Crossing, Bronx, NY

AKRF is currently providing environmental consulting services in connection with the Elton Crossing site in the Bronx, NY. The work initially involved the preparation of a Phase I Environmental Site Assessment and Phase II subsurface investigation including soil and soil vapor testing to determine if the site would be eligible for the New York State Brownfield Cleanup Program (NYSBCP) based on its historic usage. AKRF prepared a NYCBCP Application and the site was accepted in to the NYSBCP. AKRF managed all aspects of the brownfield cleanup including; development of Remedial Investigation (RI) and Supplemental Remedial Investigation (SRI) Work Plans, conducting the RI and SRI and preparing the associated reports, preparation of a Citizen Participation Plan, distribution of public notices, and preparation of a Remedial Action Work Plan (RAWP). AKRF managed all aspects of the remediation, including providing guidance for the closure of two petroleum spills; the registration, removal, and closure of six petroleum storage tanks encountered during excavation; and waste characterization and disposal of soil with contaminants including hazardous lead, petroleum, and pesticides, and design of a Sub-Slab Depressurization System (SSDS). AKRF prepared and submitted a Site Management Plan (SMP) and a Final Engineering Report (FER), which documented compliance with the RAWP. The SMP and FER were approved by NYS in 2016. AKRF is currently providing long-term site management in accordance with the NYSBCP.

On-Call Environmental Consulting Services (Various Locations), New York City Mayor's Office of Environmental Remediation (OER) (administered by NYCEDC)

Ms. Shapiro is managing an on-call contract with the OER for brownfields environmental assessment and remediation. The work has included conducting Phase I environmental site assessments (ESAs) and multi-media sampling of soil, groundwater, and soil vapor for various sites funded by EPA grants. The work plans and investigation reports were completed in accordance with OER and EPA requirements. AKRF also implemented a remedial plan for capping a park site in Staten Island. In addition, Ms. Shapiro is providing support to OER and an affordable housing developer to expedite an application for entry into the New York State Department of Environmental Conservation (NYSDEC) Brownfield Cleanup Program (BCP), as well as preparation and implementation of the remedial investigation and remedial plan.

Atlantic Chestnut, Brooklyn, NY

AKRF was retained by Phipps Houses to provide environmental consulting services in connection with the purchase and development of former burned manufacturing buildings encompassing an entire city block in Brooklyn, New York. As part of due diligence, AKRF prepared a Phase I Environmental Site Assessment (ESA) Report for the property. After acquisition, the property was divided into three separate sites (3264 Fulton Street, 235 Chestnut Street, and 3301 Atlantic Avenue). AKRF prepared a Subsurface (Phase II) Investigation Work Plans and conducted Phase IIs at each of the sites, which included the collection and analysis of soil, soil vapor, and groundwater samples. Based on the results of the Phase IIs, which were documented in Subsurface (Phase II) Reports, New York State Brownfield Cleanup Program (NYSBCP) applications were prepared for each of the sites. After acceptance into the NYSBCP, AKRF prepared Citizen Participation Plans (CPPs) and distributed public notices. AKRF prepared Remedial Investigation (RI) Work Plans (RIWPs) for each of the sites to further investigate contaminated media at the site prior to redevelopment, conducted the RIs, and is in the process of preparing the RI Reports (RIRs).

Second Farms, Bronx, NY

AKRF, Inc. was contracted by the New York City Office of Environmental Remediation (NYCOER) to conduct a subsurface investigation of a 1.12-acre parcel in the Bronx, New York under the United States Environmental Protection Agency (USEPA) Brownfield Assessment Grant program. The investigation included a geophysical survey and utility mark-outs, and the collection and analysis of soil, groundwater, soil vapor, indoor air and ambient air samples.



DEBORAH SHAPIRO, QEP

VICE PRESIDENT

| p. 3

Brook 156, Bronx, NY

AKRF was retained by Phipps Houses to provide environmental consulting services in connection with the purchase and development of two lots located at 740 Brook Avenue in the Bronx, NY. AKRF prepared a Phase I Environmental Site Assessment (ESA) of the NYC-owned former gasoline service station and a former railroad. A Tier 1 Vapor Encroachment Screening was also conducted to satisfy HUD's vapor intrusion requirements. AKRF prepared a Remedial Investigation Work Plan (RIWP) and conducted a Remedial Investigation (RI) at the site, which included the collection and analysis of soil, soil vapor, and groundwater. The results of the RI, which were documented in a Remedial Investigation Report (RIR), were used to prepare a New York City Brownfield Cleanup Program (NYCBCP) application. The site was accepted into the New York State Brownfield Cleanup Program (NYSBCP). AKRF prepared a Citizen Participation Plan (CPP), distributed public notices, and is in the process of preparing a Supplemental Remedial Investigation Work Plan (SRIWP) to further investigate soil, soil vapor, and groundwater at the site prior to redevelopment.

Warbrook Portfolio, Manhattan, NY

AKRF provided environmental consulting services to Genesis Y15 Developer LLC and the Abyssinian Development Corporation (ADC) for the proposed rehabilitation of 30 parcels in Central Harlem for low- and moderate-income tenants. The parcels comprise two vacant lots and 28 residential buildings, including several buildings that are vacant or partially vacant. The client is seeking 4% Low-Income Housing Tax Credits issued by the New York City Housing Development Corporation (HDC) through the New York City Department of Housing Preservation & Development (HPD) to rehabilitate the 30 parcels. AKRF prepared a Phase I Environmental Site Assessment for all parcels. The Phase I summarized environmental issues based on a review of available environmental reports, a review of regulatory records, and on-site inspections. Limited Phase II Environmental Site Assessments were conducted at parcels where recognized environmental concerns were identified. Based on evidence of suspect mold associated with the Property parcels, AKRF also prepared a mold specification section for use during renovation of the Property.

Courtlandt Crescent, Bronx, NY

Ms. Shapiro directed all Phases of this NYS Brownfield Cleanup Program project in the Melrose Commons section of the Bronx from the initial Phase I and II through the Certificate of Completion and is currently managing the implementation of the Site Management Plan. A New York State Brownfield Cleanup Program (BCP) Application was submitted simultaneously with the Remedial Investigation Report (RIR) and Remedial Action Work Plan (RAWP), which sped up the timetable so that the remediation could be implemented concurrently with the planned site redevelopment activities. The site comprised an entire city block whose historic usage included a gasoline filling station, auto repair shop, machine shop, auto junkyard, iron works, boiler repair shop, brass fabricator shop, universal machinery manufacturing, waste paper company, cosmetic company, and a saw works. The investigation included soil and soil vapor testing as well as the installation and sampling of groundwater monitoring wells. The remedial activities included the removal of underground storage tanks and hydraulic lifts, soil waste classification testing, the excavation and removal of approximately 23,000 tons of non-hazardous petroleum and metals contaminated soil as well as hazardous soil containing lead, in-situ chemical oxidation, and installation of a composite cover system. In addition, site dewatering activities allowed the elevator pits to be advanced into the groundwater table. A vapor barrier (and water-proofing for the elevator pits) was installed beneath the two new buildings' foundations and a sub-slab depressurization system (SSDS) was incorporated into the buildings' foundations to eliminate the potential exposure pathway for soil vapor into the new affordable housing residential buildings. Ms. Shapiro directed the remedial activities and monitoring under a construction health and safety plan, which included a community air monitoring program. Site management activities include post-remedial groundwater monitoring and sampling, SSDS start-up testing and operations and maintenance, and annual institutional control/engineering control inspections. The project was the recipient of the 2013 Big Apple Brownfield Award.

ExxonMobil, Multiple Locations, NY



DEBORAH SHAPIRO, QEP

VICE PRESIDENT

| p. 4

Ms. Shapiro has managed the investigation and remediation of numerous ExxonMobil retail service stations in the five boroughs and Long Island. The investigations have included Phase I, II, and III site assessments, regulatory compliance, emergency spill response, UST removals, and soil and groundwater remediation.

AMY T. JORDAN

GEOLOGIST

Amy Jordan is a Geologist with 6 years of environmental consulting experience related to site assessment and remediation. Ms. Jordan works with non-profit organizations, affordable housing developers, for-profit developers, and government agencies under the regulatory oversight of NYSDEC, NYCDEP, and NYCOER. She works with projects enrolled in the New York State Brownfield Cleanup Program (BCP), the New York City Voluntary Cleanup Program (VCP), NYSDEC petroleum spills program, and NYCOER's E-designation program. Ms. Jordan conducts and manages all aspects of redevelopment projects from the initial Phase I ESA, Phase II, and remediation through post-remedial site management.

BACKGROUND

Education

B.A. Geosciences, Franklin and Marshall College, Lancaster, PA, 2011

Licenses/Certifications

40 Hour OSHA HAZWOPER Certified

OSHA 10 Hour Occupational Construction Safety and Health

NYSDEC Erosion and Sediment Control Inspector

Amtrak Track Training

NYS Asbestos Inspector

Years of Experience

Year started in company: 2012

Year started in industry: 2011

RELEVANT EXPERIENCE

12 Eckford Street, Brooklyn, New York

AKRF is providing environmental consulting services in connection with the redevelopment of the New 470 Project into a mix of affordable and market-rate residences located at 12 Eckford Street in Brooklyn, New York. Ms. Jordan developed and conducted several investigations at the property under the oversight of NYCOER. Ms. Jordan is currently preparing a BCP Application and designing the remedial action for the site, which will include the design and installation of a sub-slab depressurization system (SSDS) and soil vapor extraction (SVE) system; hazardous waste delineation and disposal; construction oversight; and ongoing remedial monitoring under the oversight of the NYSDEC. The work will culminate with a Final Engineering Report to document the completion of remedial actions and to establish protocol for site monitoring.

Elton Crossing, Bronx, New York



AMY T. JORDAN

GEOLOGIST

| p. 2

AKRF provided environmental consulting services in connection with the purchase and redevelopment of the Elton Crossing site at 899 Elton Avenue in the Bronx, New York. The work initially involved the preparation of a Phase II subsurface investigation including soil and soil vapor testing to determine if the site would be eligible for the BCP under NYSDEC oversight. Upon completion of the investigation, Ms. Jordan prepared a NYCBCP Application and the site was accepted in to the NYSBCP. Ms. Jordan prepared an updated Phase I Environmental Site Assessment Report and managed all aspects of the brownfield cleanup including development of a Supplemental Investigation Work Plan, performing a Supplemental Remedial Investigation and preparing a Supplemental Investigation Report, preparation of a Citizen Participation Plan, distribution of public notices, and preparation of a Remedial Action Work Plan (RAWP). AKRF oversaw all remediation at the Site, which included the removal of numerous underground oil tanks, and waste characterization and disposal of soil with contaminants including hazardous lead, petroleum, and pesticides. The project will be completed in Fall 2016 with the preparation of a Final Engineering Report to document the remedial activities and installation of institutional controls including a vapor barrier and AKRF-designed sub-slab depressurization system.

3363 and 3365 Third Avenue, Bronx, New York

AKRF is providing environmental consulting services in connection with the purchase and redevelopment of this property into affordable housing units under NYCOER's VCP. Ms. Jordan prepared two Phase I ESAs in accordance with New York City Acquisition Fund (NYCAF) protocol; conducted several subsurface investigations and waste classification sampling; prepared a VCP Application; and manages all aspects of the construction phase of this project.

Atlantic Chestnut Lots 1, 2, and 3, Brooklyn, New York

AKRF is providing environmental consulting services in connection with the purchase and redevelopment of these three lots from a burned factory into affordable housing units. For this project, Ms. Jordan prepared a Phase I ESA, conducted three subsurface investigations, and prepared three BCP Applications. Ms. Jordan will oversee the redevelopment, remediation, and ongoing remedial monitoring for these three sites comprising an entire city block.

New York City School Construction Authority, Various Locations, New York City

Under an on-call contract, AKRF provides the New York City School Construction Authority (NYCSCA) with hazardous materials consulting services. Ms. Jordan is involved with various due diligence and environmental assessment projects including Phase I Environmental Site Assessments (ESAs); Phase II (Subsurface) Environmental Site Investigations (soil, groundwater and soil vapor intrusion investigations); Indoor Air Quality (IAQ) Assessments; Underground Storage Tank (UST) and Aboveground Storage Tank (AST) inspections relating to boiler conversions; and peer review of other consultant's due diligence reports.



GEORGE KOKALIARIS, EIT

ENVIRONMENTAL ENGINEER

Mr. Kokaliaris is an Environmental Engineer with three years of experience in the field. His experience includes remediation system operations and maintenance (O&M), remedial technologies including soil vapor extraction (SVE), subsurface depressurization systems (SSDS), and groundwater treatment systems. Mr. Kokaliaris also has experience in urban and groundwater hydrology, construction and installation oversight, and health and safety.

BACKGROUND

Education

Candidate for M.S., Water Resources and Environmental Engineering, Villanova University
B.S., Chemical Engineering, Villanova University, 2015
Fordham University, 2011-2012

Licenses & Certifications

Engineer-in-Training
OSHA-10 Hour Occupational Construction Health and Safety
HAZWOPER-40
Amtrak Track Training
Loss Prevention System Supervisor
NYSDEC Erosion and Sediment Control Inspector

Years of Experience

Year started in company: 2018
Year started in industry: 2015

RELEVANT EXPERIENCE

145 West Street, Greenpoint, NY

At the former Huxley Envelope site in Greenpoint, Brooklyn, Mr. Kokaliaris assisted with the post remediation efforts including park construction oversight, including implementation of the Community Air Monitoring Plan and oversight of soil removal. Currently, Mr. Kokaliaris ensures compliance with the Site Management Plan (SMP), and assisted with the site inspection for the Periodic Review Report (PRR).

111-10 Astoria Boulevard, Queens NY.

Mr. Kokaliaris assisted with the remedial construction efforts, including implementation of the Community Air Monitoring Plan, oversight of soil removal, soil classification sampling, confirmatory endpoint sampling, and daily reporting.

Confidential Client: New York City Institutional Site - Soil Classification:

Mr. Kokaliaris lead portions of the field effort at the proposed development of an addition at a New York City institutional site. Mr. Kokaliaris assisted in the collection of soil samples, soil characterization, and an air monitoring Plan.



GEORGE KOKALIARIS, EIT

ENVIRONMENTAL ENGINEER | p. 2

Multimillion-gallon Petroleum Hydrocarbon Release from Former Refinery and Storage Terminal, Greenpoint, NY

Mr. Kokaliaris served as a Staff Engineer overseeing the operations and maintenance of two groundwater treatment, and one soil vapor extraction system. His responsibilities included obtaining and analyzing field data to optimize system performance and quantify free-product recovery. He also drafted and updated process and instrumentation diagrams (P&ID) process flow diagrams, coordinated system maintenance and upgrades, correlated iron concentration with turbidity to evaluate iron removal and quantify mass loading across treatment system, and oversaw a vacuum-enhanced recovery (VER) pilot study at several dual pump liquid-extraction recovery wells. Additional responsibilities included quantifying stormwater runoff that merged with treatment system effluent/discharge, prepare discharge monitoring reports for submittal to NYSDEC, ensure regulatory compliance with State Pollution Discharge Elimination System (SPDES) permit, manage markout requests for underground utilities, and evaluating health and safety metrics.

Vapor Mitigation System Installation, Woodridge, NJ

Mr. Kokaliaris served as the field manager for the installation of a vapor mitigation system (VMS) to relieve chlorinated solvents present in the subsurface of a 1.5 million ft² commercial warehouse in Woodridge, NJ. Primary responsibilities included designing piping layout to optimize blower efficiency, performing initial head loss calculations for piping layout design, the installation oversight of 620 vapor extraction points across multiple tenant spaces, and scheduling and coordinating with subcontractors.

Roux Associates, Inc., Islandia, NY

As a Staff Engineer, Mr. Kokaliaris was primarily responsible for operations, maintenance, and management of remediation systems, groundwater treatment systems, soil vapor extraction systems, and subsurface depressurization systems (SSDS). Additional responsibilities included ensuring regulatory compliance with city and state regulators, performing construction and installation oversight, community air monitoring programs, and performing groundwater, soil, and soil-vapor investigations. He evaluated health and safety metrics.

VICTOR CHANG, EIT

ENVIRONMENTAL ENGINEER

Mr. Chang is an Environmental Engineer in AKRF's Hazmat department with two years of environmental consulting experience in site assessment and remediation. At AKRF, Mr. Chang conducts aspects of redevelopment projects from the initial Phase I ESA, Phase II Site Investigation, and remediation through post-remedial site management. His field work experience includes environmental site assessments and investigations (surface water, groundwater, soil, indoor air, and soil vapor), energy audits, construction oversight, safety supervisor, and waste management.

BACKGROUND

Education

Pursuing Masters of Engineering, Environmental Engineering, Stevens Institute of Technology, Hoboken, NJ

B.S., Environmental Engineering, *cum laude*, University at Buffalo, The State University of New York, UB School of Engineering and Applied Sciences, 2015

Certifications

Engineer-in-Training

OSHA 40-Hour Hazwoper

OSHA 30-Hour Construction

OSHA 8-Hour Supervisor

First Aid/CPR/AED

Years of Experience

Year started in company: 2017

Year started in industry: 2015

RELEVANT EXPERIENCE

AKRF – Various Projects, NY

Since joining AKRF, Mr. Chang has provided environmental consulting services on various projects. Mr. Chang has been involved with various environmental projects including Phase I Environmental Site Assessments (ESAs); Phase II (Subsurface) Environmental Site Investigations (soil, groundwater, and soil vapor intrusion investigations); Indoor Air Quality (IAQ) Assessments, and Construction Oversight (including community air monitoring, vapor barrier/SSDS installations, waste classification and delineation), as well as the proposals, work plans, and reporting associated with these tasks.

Merck OER and ACM Removal Project

While at another employer, Mr. Chang served as Site Superintendent, where his responsibilities included:

- Providing management and safety oversight for obsolete equipment and asbestos removal project;
- Assisting project manager with plans, schedules, costs, and overseeing sub-contractors;



VICTOR CHANG, EIT

ENVIRONMENTAL ENGINEER | p. 2

- Participating actively in meetings, presentations, and Merck safety culture to foster client relationships; and
- Overseeing environmental compliance and monitoring (stormwater, waste management, air monitoring, excavation/confined spaces).

O'Brien & Gere Edison, NJ

While at another employer, Mr. Chang served as a Staff Environmental Engineer, where his responsibilities included:

- Supporting engineering projects through providing remedial oversight, calculations, and data analysis;
- Facilitating execution and supporting remediation projects including proposals, reports, designs, and workplans; and
- Performing and supervising field work (sampling, investigation, monitoring) for soil, vapor intrusion, groundwater, surface water.

En-Power Group Manhattan, NY

While at another employer, Mr. Chang served as an Energy Analysis and Field Intern, where his responsibilities included:

- Assisting lead engineers in the field conducting complete energy audits for multi-family buildings;
- Performing and evaluating feasibility, energy savings, and cost-benefit analysis for energy efficiency measures; and
- Producing energy efficiency reports including level I, II, and III audits for clients and the city.


Go Solar Green NY Queens, NY

While at another employer, Mr. Chang served as a Solar Design and Marketing Intern, where his responsibilities included:

- Applying solar theory and design to residential and commercial spaces;
- Performing cost and energy production estimates for small-scale solar systems; and
- Qualifying and contacting prospective clients for distribution of marketing materials.

APPENDIX C

**PROPOSED SOIL VAPOR EXTRACTION (SVE) SYSTEM BLOWER AND
CARBON CUT SHEETS, AND CARBON SIZING DESIGN**



FPZ
BLOWER TECHNOLOGY

SERIES K-TS MOR




IE2 VERSION

TECHNICAL CHARACTERISTICS

- Aluminium alloy construction
- High efficiency impeller

OPTIONS

- Special Voltages (IEC 60038)
- Surface treatments
- Increased seal version

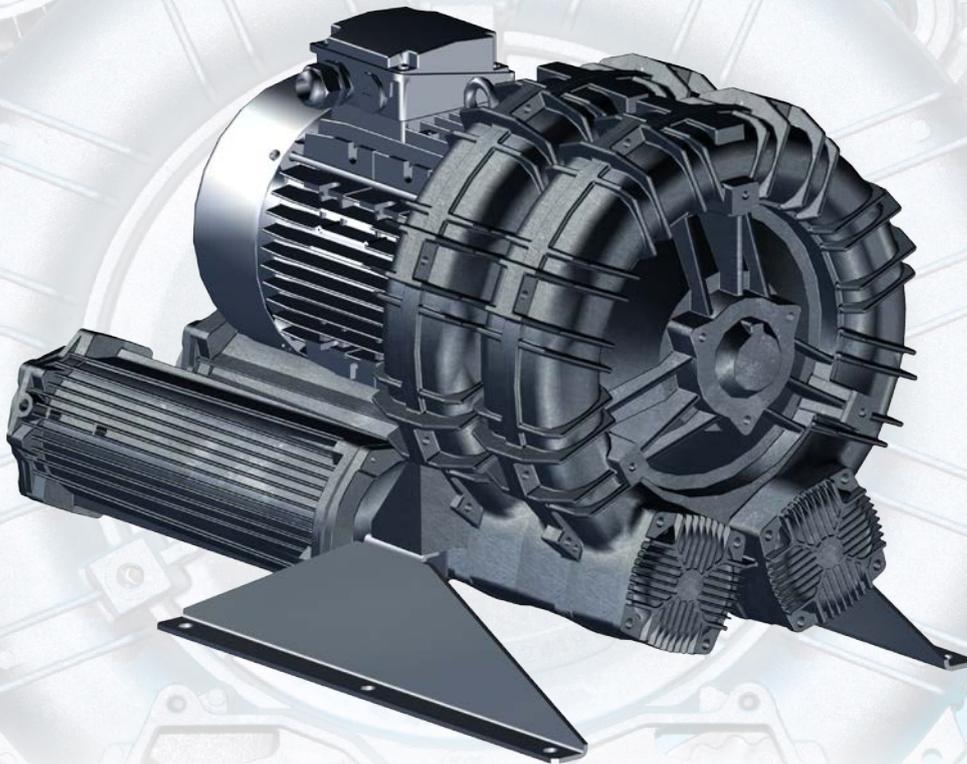

Data sheet

LATERAL CHANNEL BLOWER-EXHAUSTER

COMPANY WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001:2008 =



PRESSURE

Model	N 2900 rpm [kW]	N 3500 rpm [kW]	Q max 2900 rpm [m³/h]	Q max 3500 rpm [m³/h]	ΔP max 2900 rpm [hPa](mbar)	ΔP max 3500 rpm [hPa](mbar)	Leq¹ 2900 rpm (Lp)[dB(A)]	Leq¹ 3500 rpm (Lp)[dB(A)]	Weight² max [kg]
K05-TS	3	3,4	409	493	175	140	71,5	73,5	50
	4	4,6	409	493	250	210	73,5	75,5	56
K06-TS	4	4,6	563	679	130	100	75,2	77,2	64
	5,5	6,3	563	679	200	175	75,5	77,5	68
K07-TS	7,5	8,6	563	679	300	275	75,8	77,8	85
	5,5	6,3	827	998	150	110	81,9	83,9	99
K08-TS	7,5	8,6	827	998	225	200	82,2	84,2	106,5
	9,2	10,6	827	998	275	250	82,5	84,5	109,5
K09-TS	7,5	8,6	1007	1215	160	120	78,9	80,9	110
	9,2	10,6	1007	1215	210	170	80,1	82,1	113
K10-TS	11	12,6	1325	1600	190	150	81	83	151,5
	15	17,2	1325	1600	270	240	83	85	179
K11-TS	18,5	21,2	1325	1600	360	275	85	87	180
	15	17,2	1539	1858	225	180	86,1	88,1	187
K12-TS	18,5	21,2	1539	1858	275	260	86,4	88,4	188
	15	17,2	1765	2130	160	105	86,7	88,7	194
K12-TS	18,5	21,2	1765	2130	220	165	87,4	89,4	195
	18,5	-	1985	-	150	-	87,9	-	199,5

VACUUM

Model	N 2900 rpm [kW]	N 3500 rpm [kW]	Q max 2900 rpm [m³/h]	Q max 3500 rpm [m³/h]	ΔP max 2900 rpm [hPa](mbar)	ΔP max 3500 rpm [hPa](mbar)	Leq¹ 2900 rpm (Lp)[dB(A)]	Leq¹ 3500 rpm (Lp)[dB(A)]	Weight² max [kg]
K05-TS	3	3,4	409	493	175	140	71,1	73,1	50
	4	4,6	409	493	225	210	73,1	75,1	56
K06-TS	4	4,6	563	679	130	100	74,8	76,8	64
	5,5	6,3	563	679	200	175	75,1	77,1	68
K07-TS	7,5	8,6	563	679	250	250	75,4	77,4	85
	5,5	6,3	827	998	150	110	82,5	84,5	99
K08-TS	7,5	8,6	827	998	225	200	82,8	84,8	106,5
	9,2	10,6	827	998	275	250	83,1	85,1	109,5
K09-TS	7,5	8,6	1007	1215	160	120	79,2	81,2	110
	9,2	10,6	1007	1215	210	170	80,7	82,7	113
K10-TS	11	12,6	1325	1600	190	150	82,2	84,2	151,5
	15	17,2	1325	1600	270	240	84,1	86,2	179
K11-TS	18,5	21,2	1325	1600	300	275	86,1	88,1	180
	15	17,2	1539	1858	225	180	87,4	89,4	187
K12-TS	18,5	21,2	1539	1858	275	260	87,7	89,7	188
	15	17,2	1765	2130	160	105	88	90	194
K12-TS	18,5	21,2	1765	2130	220	165	88,7	90,7	195
	18,5	-	1985	-	150	-	89,2	-	199,5

ELECTRIC MOTORS IE2: 3phase motor only, starting from 0,75KW

INSTALLATION

- For proper use, the blower should be equipped with inlet FILTER and Flow Relief VALVE; other accessories available on request.
- Ambient temperature from -15° to +40°C (+5° to +104° F).
- Specifications subject to change without notice.
- Before installation read carefully all instructions.

¹ Noise measured at 1 m distance with inlet and outlet ports piped, in accordance to ISO 3744

² Value refers to the weight of the machine with 3 Phase motor if MOR range, without motor if GOR or GVR range.

N: Installed motor power


Q: Flow rate

P: Differential pressure


Leq: Noise

PRESSURE



2900 rpm (50 Hz)

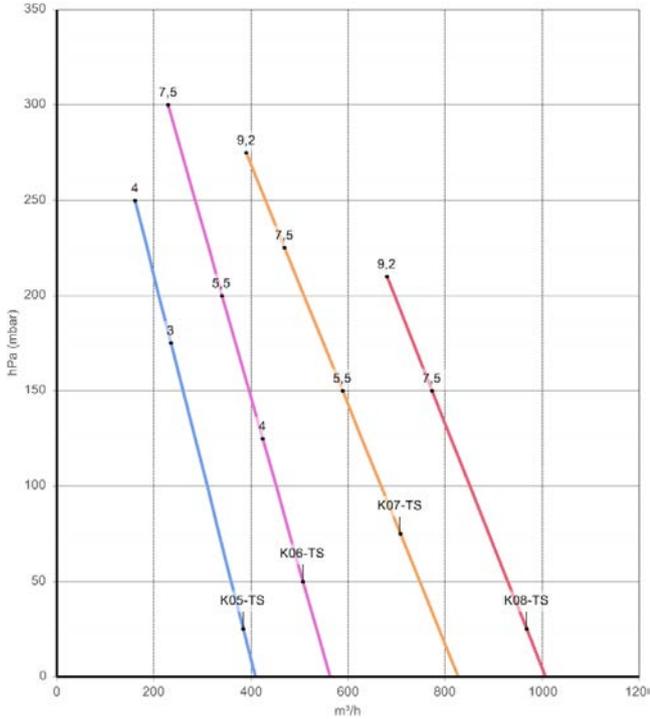



3500 rpm (60 Hz)

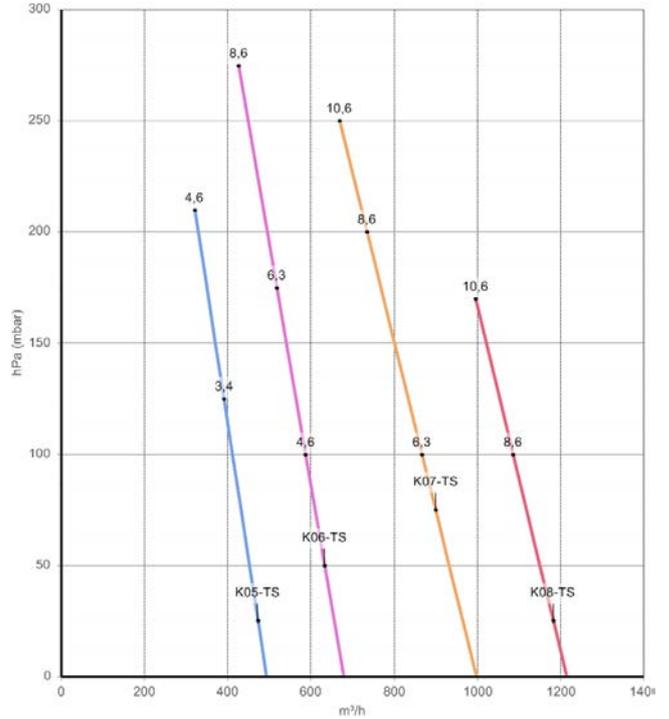

FLOW RATE

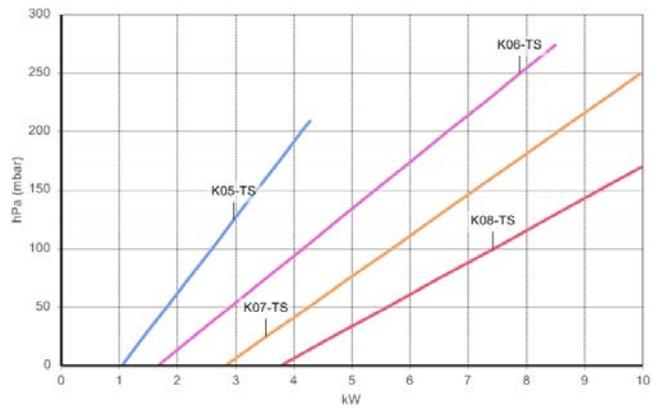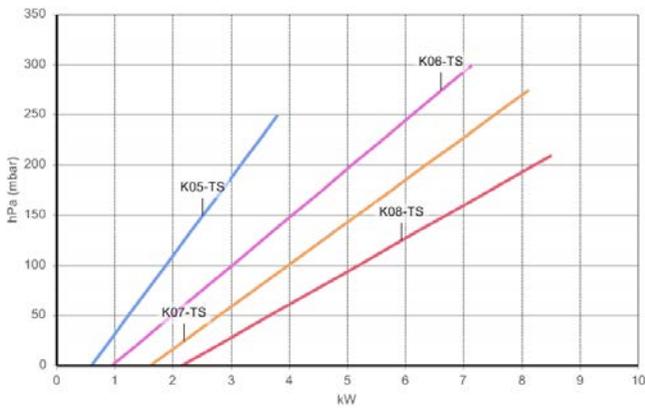

ABSORBED POWER

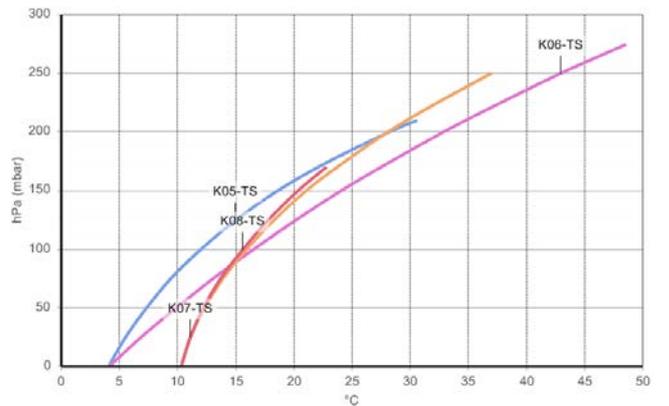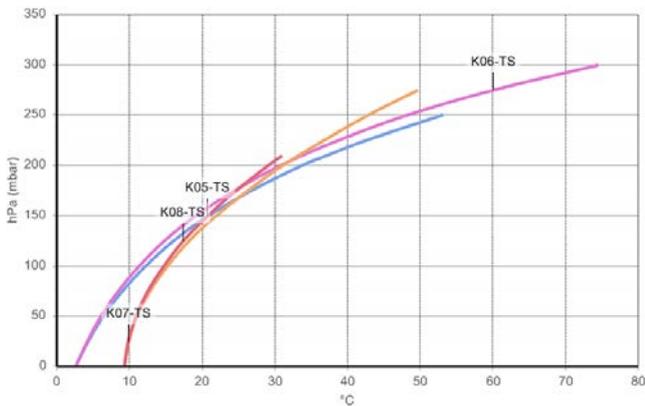



TEMPERATURE INCREASE

Curves refer to air at 20°C (68° F) temperature and 1013 mbar (29.92 In Hg) atmospheric pressure (abs) measured at inlet port.
Values for flow, power consumption and temperature rise: ±10% tolerance
Data can change without prior notice



PRESSURE

2900 rpm (50 Hz)



3500 rpm (60 Hz)

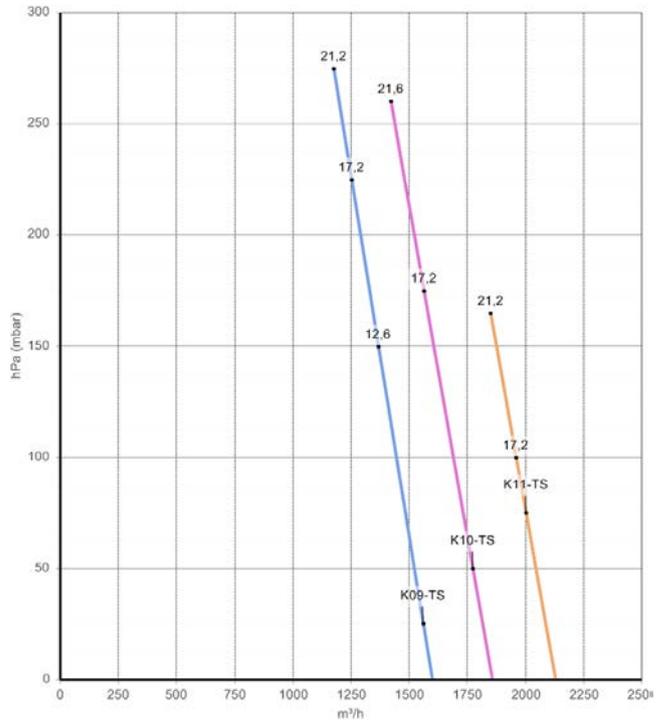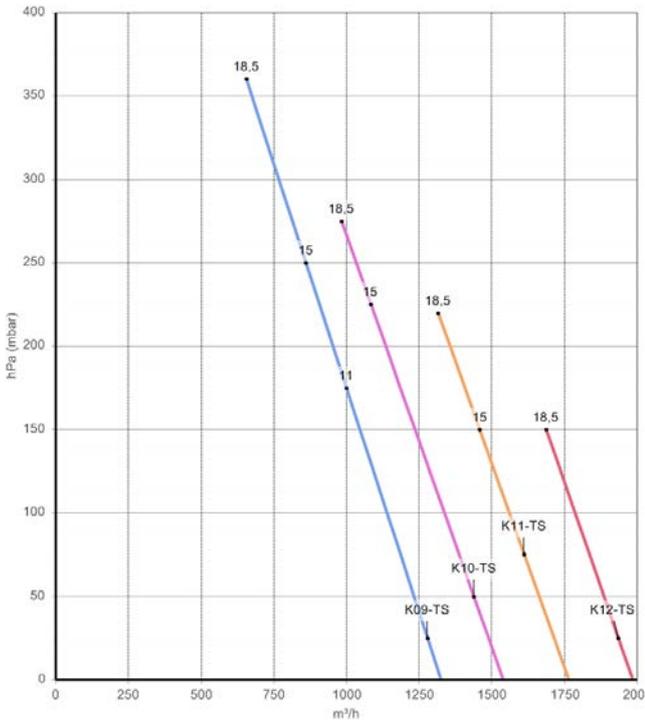

FLOW RATE

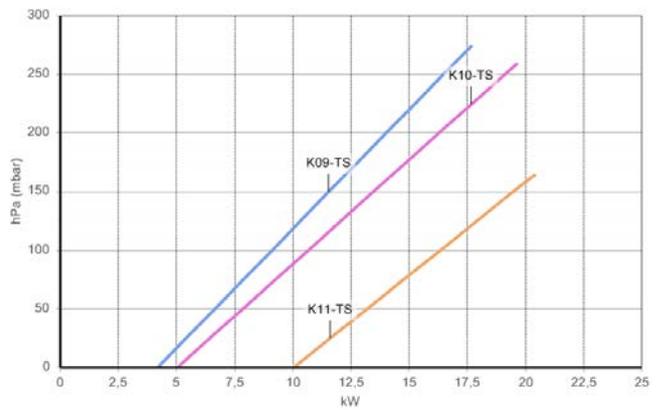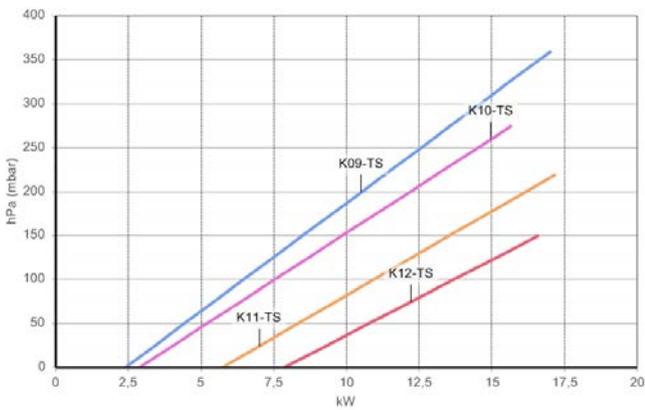

ABSORBED POWER

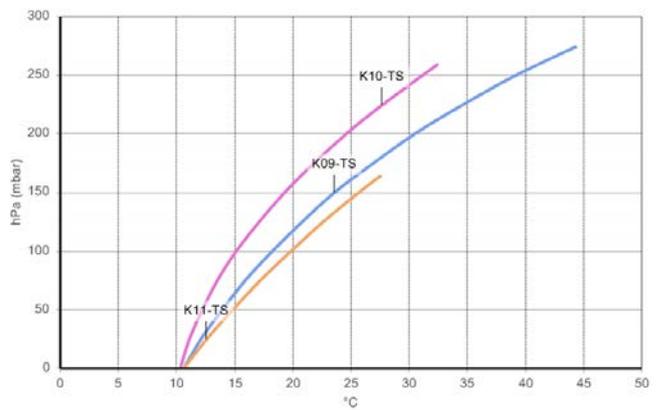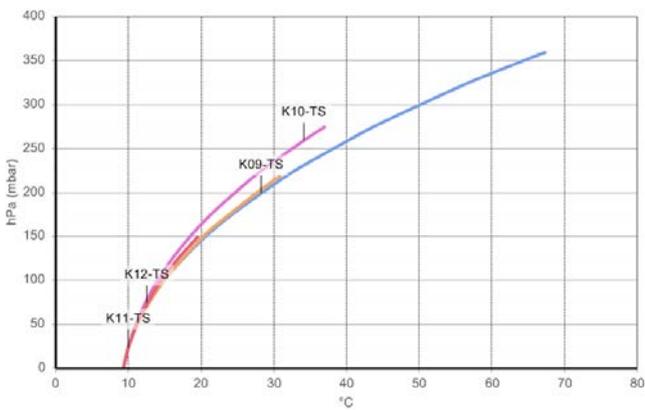



TEMPERATURE INCREASE

Curves refer to air at 20°C (68° F) temperature and 1013 mbar (29.92 In Hg) atmospheric pressure (abs) measured at inlet port.
Values for flow, power consumption and temperature rise: ±10% tolerance
Data can change without prior notice.



VACUUM

2900 rpm (50 Hz)



3500 rpm (60 Hz)

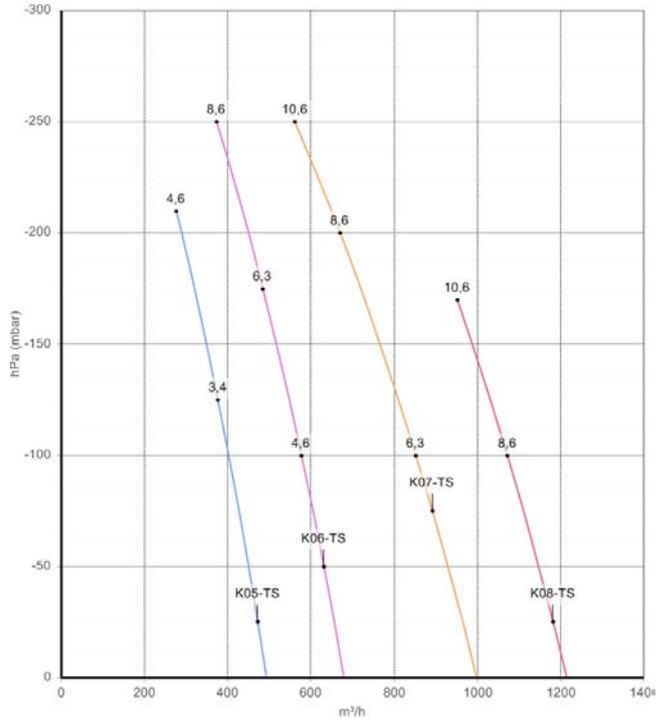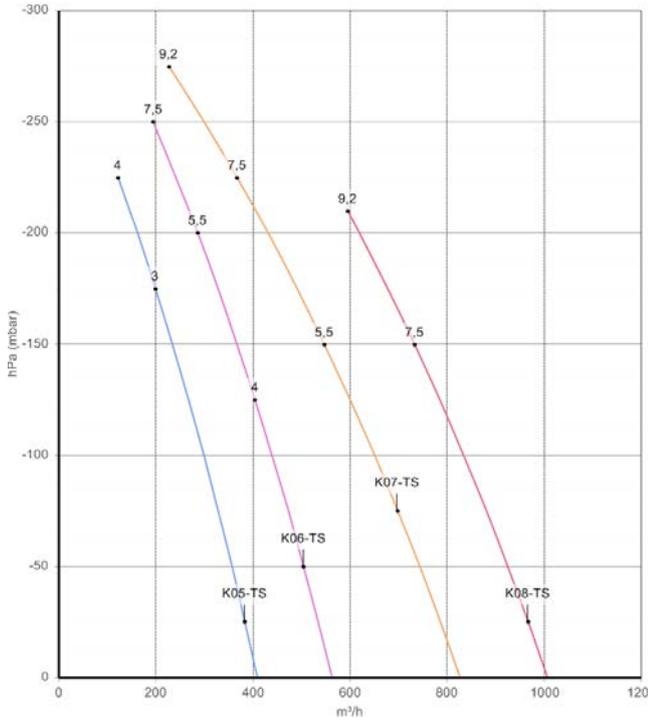

FLOW RATE

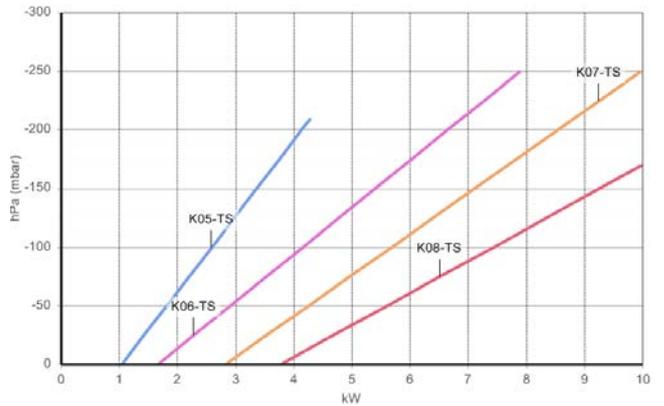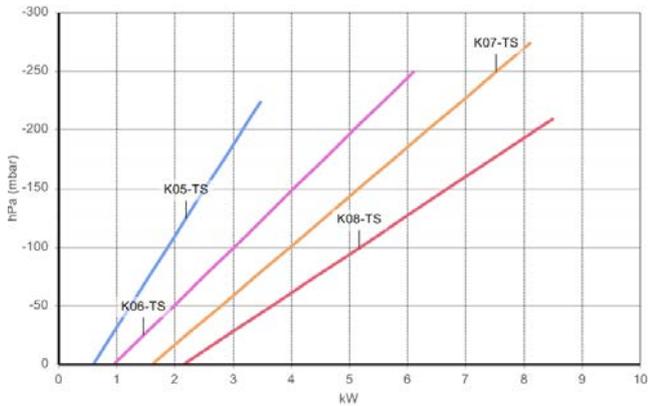

ABSORBED POWER

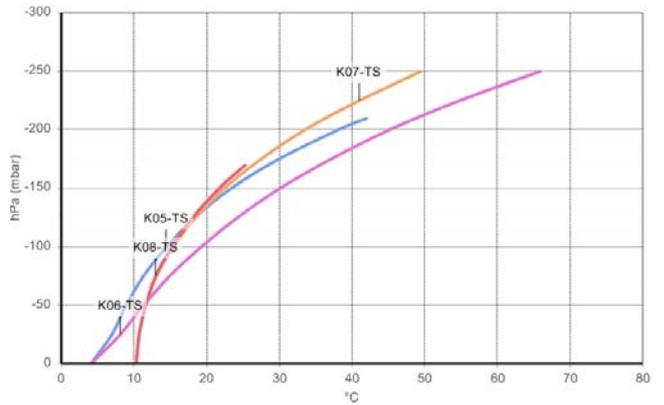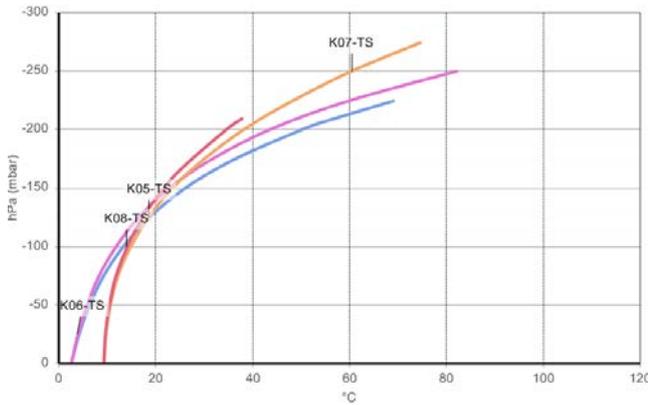


TEMPERATURE INCREASE

Curves refer to air at 20°C (68° F) temperature, measured at inlet port and 1013 mbar (29.92 In Hg) atmospheric backpressure (abs).
 Values for flow, power consumption and temperature rise: ± 10% tolerance
 Data can change without prior notice.



VACUUM

2900 rpm (50 Hz)


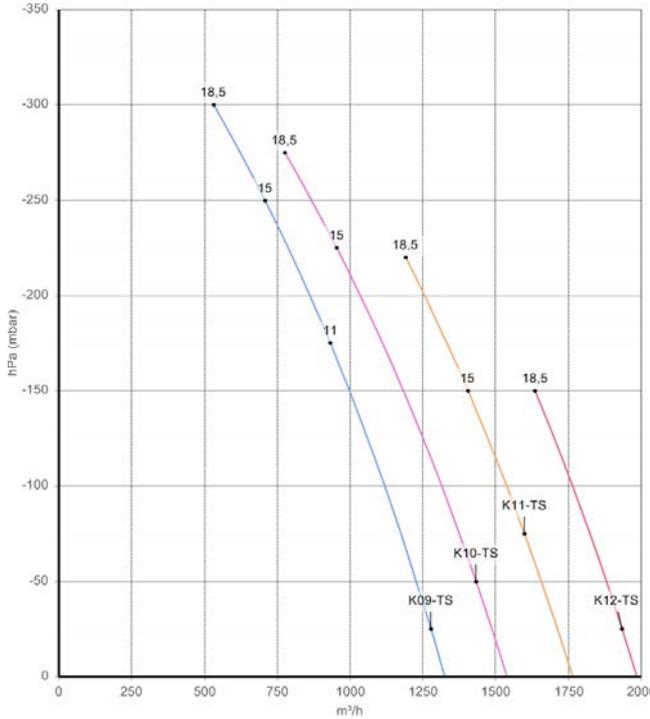


FLOW RATE


3500 rpm (60 Hz)

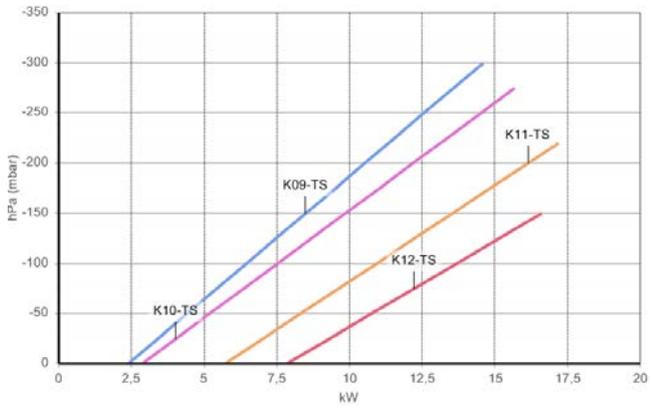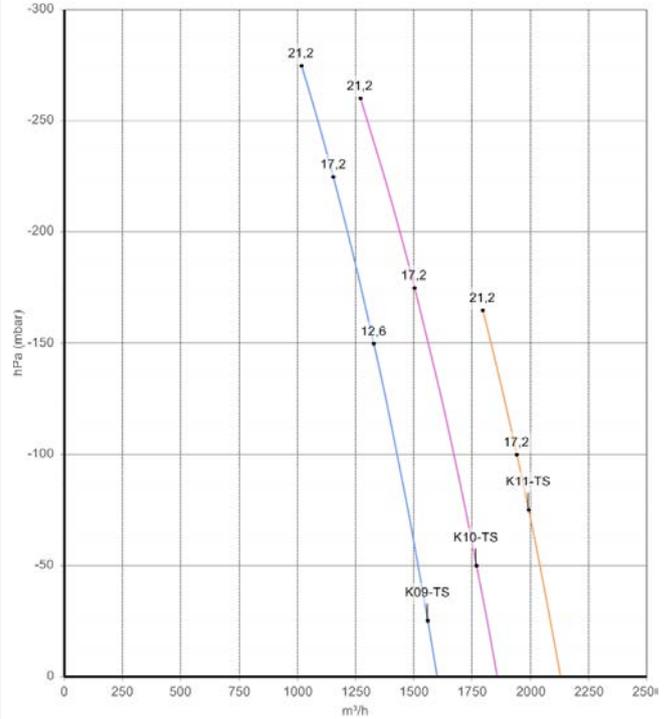


ABSORBED POWER

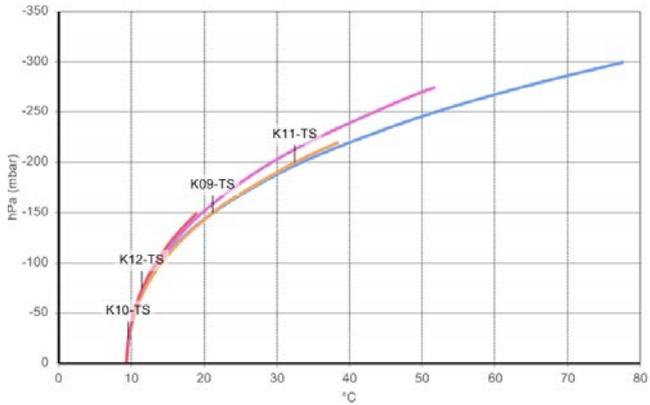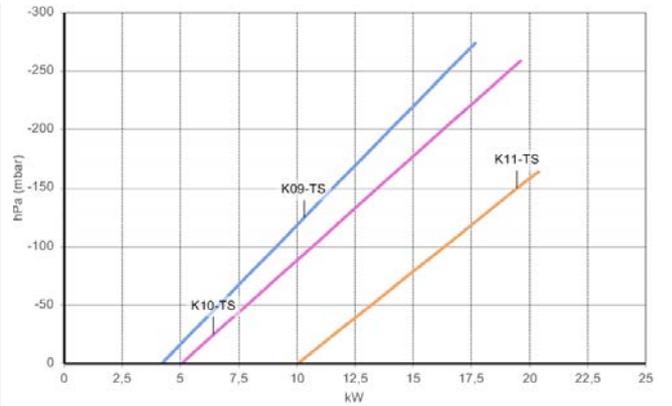

TEMPERATURE INCREASE

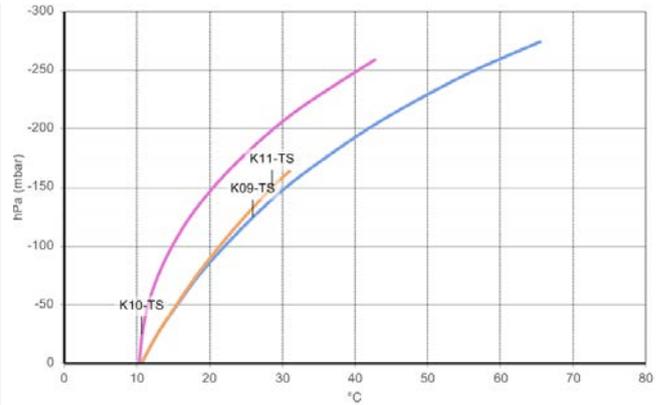

Curves refer to air at 20°C (68° F) temperature, measured at inlet port and 1013 mbar (29.92 In Hg) atmospheric backpressure (abs).
Values for flow, power consumption and temperature rise: ± 10% tolerance
Data can change without prior notice.

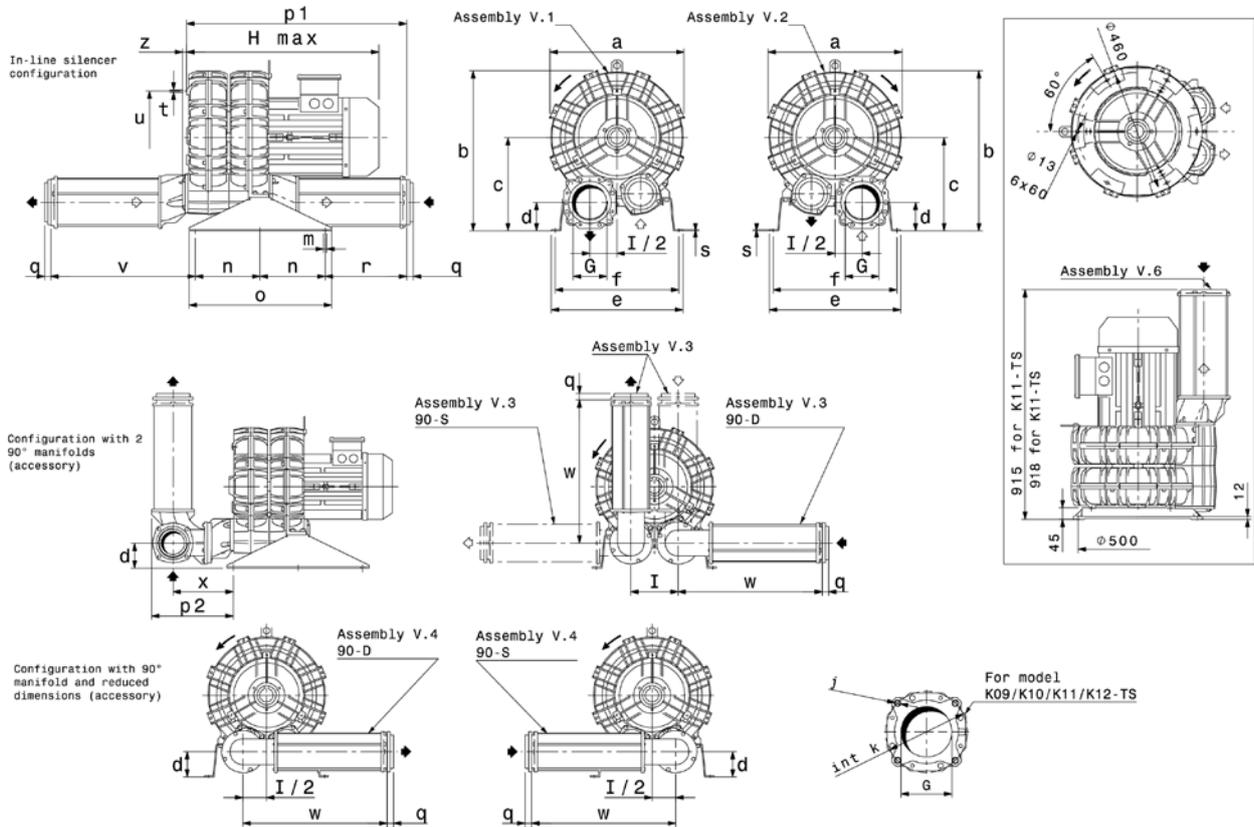DIMENSIONS (K05-TS/K06-TS/K07-TS/K08-TS/K09-TS/K10-TS/K11-TS/K12-TS)


Dimensions in mm - FOR REFERENCE ONLY

Model	a	b	c	d	e	f	G	H
K05-TS	327	422	258	77	404	374	G 3"	495
K06-TS	376	450	262	75	404	374	G 3"	580
K07-TS	424	531	319	98	468	438	G 4"	625
K08-TS	457	548	319	98	478	448	G 4"	625
K09-TS	492	610	365	112	508	478	130	760
K10-TS	516	623	365	112	508	478	130	760
K11-TS	542	650	380	106	540	510	130	775
K12-TS	548	652	380	106	540	510	130	780


Model	i	j	k	m	n	o	p1	p2	q
K05-TS	150	-	-	13	300	345	634	249	25
K06-TS	155	-	-	13	300	345	662	268	25
K07-TS	182	-	-	13	250	550	802	315	25
K08-TS	182	-	-	13	250	550	802	315	25
K09-TS	210	M16	210	13	250	550	850	447	-
K10-TS	210	M16	210	13	250	550	850	447	-
K11-TS	228	M16	210	13	250	550	870	462	-
K12-TS	228	M16	210	13	250	550	873	462	-



SERIES TS – RANGE MOR

IE2 VERSION

Model	r	s	t	u	v	w	x	z
K05-TS	328	4	M8	200	436	481	176	19
K06-TS	335	4	M8	240	455	481	195	19
K07-TS	299	5	M8	295	522	581	276	16
K08-TS	299	5	M8	310	522	581	276	16
K09-TS	315	5	M8	360	558	608	337	16
K10-TS	315	5	M8	360	558	608	337	16
K11-TS	320	5	M8	390	573	608	352	16
K12-TS	320	5	M8	390	573	608	352	16



FPZ
BLOWER TECHNOLOGY

FPZ, Inc

Saukville, Wisconsin
USA
usa@fpz.com

FPZ México/LA

Zapopan, Jalisco
México
mexico@fpz.com

FPZ Espana/Portugal

Pral, Barcelona
Espana
mila.lozano@fpz.com

FPZ France S.a.r.l.

St. Priest
France
france@fpz.com

HEADQUARTERS

FPZ S.p.A.

Concorezzo (MB)
Italy
info@fpz.com

FPZ UK

Andover, Hampshire
United Kingdom
uk@fpz.com

FPZ Austria & Germany

Krems
Austria
vertrieb@fpz.com

Liquid Filters

Vapor Filters

VFD Series

- VFD-30
- VFD-55
- VFD-85
- VFD-110

VFV Series

- VFV-250
- VFV-500
- VFV-1000
- VFV-2000
- VFV-3000
- VFV-5000
- VFV-10000

VF Series

- VF-500
- VF-1000
- VF-2000
- VF-3000
- VF-5000
- VF-10000

VR Series

- VR-140
- VR-170
- VR-225
- **VR-400**
- VR-700
- VR-1600
- VR-2600

Filtration Media

Special Products

MODEL VR-400


The VR-400 filter is a radial flow filter vessel designed to treat vapor streams where pressure drop is a strong concern. With the radial design in certain applications the user can obtain higher flow rates than could be obtained in similar upflow filters. Some applications include:


- Soil Vapor Extraction Treatment
- Air Stripper Off Gas Treatment
- Odor Removal System
- Storage Tank Purge Vapor Treatment
- Industrial Process Treatment

Picture
Not
Available

PRESSURE DROP GRAPH

(As Filled 4'x10 GAC)

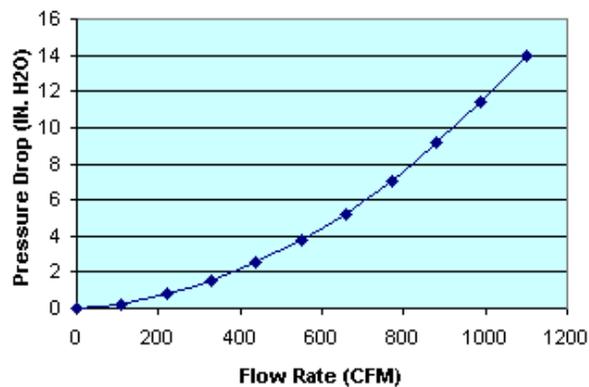

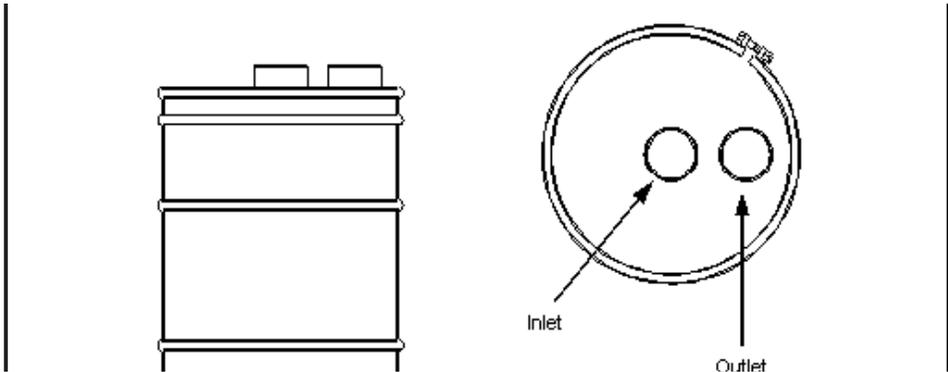

http://tetrasolv.com/catalog/vr-400.htm

Go

INTERNET ARCHIVE
Wayback Machine

11 captures

20 Mar 06 - 10 Sep 15

MAR
2006

VR-400 SPECIFICATIONS			
Overall Height	3'11"	Vessel/Internal Piping Materials	CS/ SCH 40 PVC
Diameter	30"	Internal Coating	Polyamide Epoxy Resin
Inlet / Outlet (FNPT)	6"	External Coating	Urethane Enamel
Drain / Vent (FNPT)	OPT	Maximum Pressure / Temp	2 PSIG / 150° F
GAC Fill (lbs)	400	Cross Sectional Bed Area	8.8 FT ²
Shipping / Operational Weight (lbs)	500/575	Bed Depth/Volume	11.7 IN / 14.25 FT ³

[Our Company](#) | [News](#) | [Catalog](#) | [Services](#) | [RFQs](#) | [Contact](#)

Tetrasolv Filtration, Inc. • 1200 East 26th Street • Anderson, Indiana 46016 • USA
Toll Free: 800-441-4034 Telephone: 765-643-3941 • Fax: 765-643-3949
www.tetrasolv.com • info@tetrasolv.com

