NYSDEC BROWNFIELD CLEANUP PROGRAM

Soils Management Plan – BCP # C224329 April 29,2022

conducted at:

585 Union Street 577-599 Union Streeet (also known as 586 Sackett Street) Brooklyn, New York County Tax Map Designation: *Block 433; Lot 28*

Submitted to:

Division of Environmental Remediation New York State Department of Environmental Conservation 625 Broadway Albany, New York, 12233-7020

Prepared For:

Gowanus Union Street LLC 19 West 24th Street, 12th Floor New York, NY, 10010

IEC Project # 14729



TABLE OF CONTENTS

LIST OF	F ACRO	NYMS	1
		N	
1.0	SI	TE BACKGROUND	1
	1.1	Site Location and Current Usage	1
	1.2	Project Description	2
	1.3	Description of Surrounding Property	2
	1.4	Prior Environmental Investigation Reports	2
2.0	SC	DIL/MATERIALS MANAGEMENT PLAN	6
	2.1	Soil Screening Methods	e
	2.2	Stockpile Methods	
	2.3	Characterization of Excavated Materials	6
	2.4	Materials Excavation, Load-Out and Departure	6
	2.5	Off-Site Materials Transport	7
	2.6	Materials Disposal Off-Site	7
	2.7	Materials Reuse On-Site	8
	2.8	Import of Backfill Soil from Offsite Sources	<u>c</u>
	2.9	Fluids Management	10
3.0	RI	EPORTING	13

PLATES

PLATE 1 SITE PLAN

PLATE 2 TEST PIT LOCATIONS

APPENDICES

APPENDIX A COSTRUCTION HEALTH AND SAFETY PLAN (CHASP)

LIST OF ACRONYMS

Acronym	Definition
AOC	Area of Concern
CEQR	City Environmental Quality Review
ELAP	Environmental Laboratory Accreditation Program
EPA	United States Environmental Protection Agency
NYC DCP	New York City Department of City Planning
NYC DOB	New York City Department of Buildings
NYS DEC	New York State Department of Environmental Conservation
NYS DOH	New York State Department of Health
PE	Professional Engineer
PID	Photo Ionization Detector
QEP	Qualified Environmental Professional
RAWP	Remedial Action Work Plan
RCA	Recycled Concrete Aggregate
SCO	Soil Cleanup Objective
SMMP	Soil/Materials Management Plan
SVOCs	Semi-Volatile Organic Compounds
TAL	Target Analyte List
UUSCO	Unrestricted Use Soil Cleanup Objective
UST	Underground Storage Tank
VOCs	Volatile Organic Compounds

CERTIFICATION

I, Xin Yuan am a Professional Engineer (PE) as defined in §43-140. I have primary direct responsibility for implementation of the Soils Management Plan (SMP) for the (585 Union Street, Brooklyn, NY) Site (DEC Site # C224329).

I certify that the SMP has a plan for handling, transport and disposal of soil, fill, fluids and other materials removed from the property in accordance with applicable City, State and Federal laws and regulations. Importation of soil, fill and other material from off-Site will be in accordance with applicable City, State and Federal laws and requirements. This SMP has provisions to control nuisances during invasive work, including dust suppression.

Xin Yuan, P.E.

Name

Signature

4/29/2022

Date



1.0 SITE BACKGROUND

This Soils Management Plan (SMP) has been developed for a development project located at 585 Union Street, Brooklyn, New York (the Site), identified as Block 433, Lot 28 on the New York City Tax Map. This project has been assigned project number C224329 by the New York Department of Environmental Conservation Brownfield Cleanup Program (NYDEC BCP).

An E-Designation for Hazardous Materials, Air Quality and Noise (E-601) was placed on the lot by NYC Department of City Planning (DCP) and the City Council as a part of the Gowanus Neighborhood rezoning process.

Lots with said designation may not be issued a building permit allowing: 1) any development; 2) an enlargement, extension or change of use involving residential or community facility use; or 3) enlargement that disturbs the soil on said lot unless and until the Department of Buildings (NYC DOB) is provided with a report from NYC OER stating that the environmental requirements for the lot have been met. To that end this SMP has been prepared outlining the environmental controls for the proposed work.

1.1 Site Location and Current Usage

The Site is located at northwest corner of the intersection of 3rd Avenue and Union Street, Brooklyn, New York (refer to **Plate 1** for a Site Location Map). The Site is designated on the Tax Map of New York City as Block 433, Lot 28. The Site has a footprint of approximately 33,550 square feet (SF) and has recently been rezoned per the *Special Gowanus Mixed-Use* District from M1-2X (light manufacturing) to R7A/R6A, which is representative of residential.

According to historic Sanborn Fire Insurance maps, as early as 1889, the eastern portion of the Site was used as a timber yard and western portion contained a single building used as a paint shop. In 1938 water distilling was depicted on the eastern portion of the Site, while the western portion was improved with its current warehouse structure (utilized by the NY Fire Department as an automobile repair garage and by the Telegraph Department for storage). By 1950 the warehouse structure was used by the NY Fire Department Telegraph Bureau, and by 1982, the South Brooklyn Casket Company occupied the entire Site.

The Site is situated in an urban area within the Gowanus Canal Corridor as well as the Red Hook-Gowanus Brownfield Opportunity Areas. Directly north of the property is Sackett Street, followed by a commercial warehouse; directly east is 3rd Avenue, followed by an industrial warehouse; the Site is bounded by Union Street directly to the south, followed by residential and commercial properties; and the adjoining properties to the west are multi-story residential properties.

The main Site features are two (2) single-story warehouse structures. The property is currently vacant. It most recently functioned as a casket manufacturer and distributor, operating as Matthews International Casket Division (formerly South Brooklyn Casket Company) since 1981/1982. Manufacturing within the facility ceased prior to 2005.

1.2 Project Description

The scope of work for the purposes of this SMP shall include the installation of eight (8) test pits on the western portion of the property. Each test pit will extend beneath grade to a terminal depth of approximately 10 feet. The approximate size of test pit excavations for TP-1, TP-2, TP-6, TP-7 and TP-8 will be 10' by 10' and generate approximately 1,000 cubic feet of soil per pest pit location. The approximate size of test pit excavations for TP-3, TP-4 and TP-5 will be 5' by 5' and generate approximately 125 cubic feet of soil per test pit location. The purpose of the test pits, to be installed by Geotechnical Engineering Services, P.C. (GES), is to ensure that the ground conditions (soil composition) in these areas is suitable for building, prior to the start of construction. Refer to **Plate** 2 for approximate location of test pits. All material handling will be done per the SMP and EWP. At the completion of work, a report will be submitted to the DEC to provide details regarding all material import (if required) and export at the Site, sampling results and field observations.

Further demolition, redevelopment and excavation work will be detailed in a Remedial Action Work Plan (RAWP) designed for the Site.

1.3 Description of Surrounding Property

Surrounding land use consists primarily of commercial properties with some residential properties. Directly north of the property is Sackett Street, followed by a one-story commercial warehouse which houses A&A Brake Service Truck and Auto Parts. Directly east of the subject property is 3rd Avenue, followed by a one-story industrial warehouse which houses S. J. Fuel Co. The Site is bounded by Union Street directly to the south, followed by several multi-story mixed residential and commercial properties. The adjoining properties to the west are multi-story residential properties. There are no sensitive receptors such as schools, hospitals, or day care facilities within a 250-foot or 500-foot radius of the Site.

1.4 Prior Environmental Investigation Reports

Detailed below is a summary of previous environmental report findings

Roux Phase I ESA, Dated April 2, 2019

The following on-Site recognized environmental conditions (RECs) were identified:

Historical Usage – The Subject Property has historically been a warehouse since first noted in historical
maps, with various commercial and industrial uses. Historically the Subject Property was identified to

contain a paint shop, machine shop, unspecified manufacturing and auto repair activities which all may have impacted its environmental quality.

- Historical and Current Presence of Storage Tanks Historically, oil tanks were identified in Sanborn Maps
 at the Subject Property that have not been identified through other means in this report. Additionally, an
 abandoned gasoline tank is reported to be present underneath the slab. The presence of these tanks may
 have impacted the environmental quality of the Subject Property.
- Off-Site Usage The Subject Property is located in the Gowanus area of Brooklyn, which has historically been zoned for industrial use. Many properties both historical and current present potential issues of environmental concern, including adjacent fuel oil companies, former dry cleaners, former manufacturing and auto repair related uses.
- Vapor Encroachment Condition (VEC) The Subject Property adjoins a Brownfields Site identified at 563 Sackett Street which has confirmed petroleum and chlorinated solvent impacts to the soil vapor. Additional Sites of concern were also historically present, and currently present in the surrounding area. There is a potential for migration downgradient of this contaminated soil vapor, which may impact the soil vapor beneath the Subject Property.

Roux Phase II ESA, Dated April 1, 2019

A subsequent Phase II investigation was conducted, a summary of the findings of the Phase II are presented below:

- The geology underlying the Site consists of 9 to 12 feet of historic fill comprising gravel, brick and glass.

 Below the fill material, soil was characterized as fine to medium sand with clay, silt, and gravel.
- Groundwater was encountered at approximately 12 to 15 feet below ground surface (bgs) and groundwater was predicted to flow west toward the Gowanus Canal.
- A total of three (3) soil borings were advanced within the warehouse structure and one (1) soil sample was
 collected from each boring from 2-foot intervals exhibiting the greatest evidence of impact (elevated PID
 detections, odors, or staining) from soil boring RXSB-5. In the absence of observable impact, soil was
 collected from the 2-foot interval above groundwater from soil borings RXSB-4 and RXSB-6.
 - One VOC, 1,2,4-Trimethylbenzene, was detected in soil sample RXSB-5 above the NYSDEC Part 375
 RRSCOs and CSCOs.
 - PAHs were detected in all three soil samples with exceedances of RRSCOs and CSCOs identified RXSB-5 and RXSB-6.
 - o Polychlorinated biphenyls (PCBs) were not detected in any soil sample.
 - o Two metals, lead and mercury were detected in exceedance of RRSCOs in soil sample RXSB-5.
- One (1) sediment sample was collected from a floor drain located in the basement of lot 28. PAHs and metals were detected in exceedance of RRSCOs and CSCOs.

- One (1) composite soil sample was collected for waste characterization. PAHs were detected in exceedance of RRSCOs and CSCOs. TCLP metals were not detected above the USEPA regulatory levels
- Two (2) temporary well points were installed within soil borings RXSB-5 (RXGW-2) and RXSB-6 (RXGW-3) to 20 feet and 15 feet respectively, each with 10 feet of 1-inch polyvinyl chloride (PVC) well screen. One (1) groundwater sample was collected from each temporary well.
 - o VOCs, PAHs, and metals (total and dissolved), exceeding the AWQS.
 - Petroleum related VOCs were detected at concentrations above their respective AWQS in temporary well RXGW-2 (near of the potential location of five (5) oil tanks).
 - Elevated metals concentrations are likely attributed to sediment in the groundwater sample and/or are naturally occurring.
- One (1) soil vapor point (RXSV-2) was installed to approximately 6-inches below the building slab. Concentrations of various VOCs were detected; however, no applicable guidance values exist in NYS for such vapor constituents. Additionally, chlorinated solvents were detected, one (1), PCE has a guidance value assigned by NYSDOH Soil Vapor Intrusion Guidance Decision Matrices (NYSDOH Matrices), however, in review of the NYSDOH Matrices the PCE does not trigger further remedial monitoring or mitigation.

Impact Environmental Closures, Inc SI Report, Dated October 2, 2020

A Subsurface Investigation Report (SI) was prepared for the Site in order to provide sufficient information to establish remedial action objectives. The investigation is summarized beow:

- A limited GPR survey was performed in the vicinity of drilling locations and suspected tank locations. No anomalies indicative of USTs were identified.
- Installation of six (6) soil borings to 15 feet bgs and collection of twelve (12) soil samples.
 - Elevated PID readings ranging from 180.2 ppm to 705.2 ppm were observed within soil boring IEC-SB-1 at depths of 6 feet to 15 feet bgs; and elevated PID readings ranging from 829.4 ppm to 998.2 ppm were observed within soil boring IEC-SB-2 at depths of 11 feet to 12 feet bgs. Soil boring IEC-SB-1 was installed within the former heating oil UST location, and IEC-SB-2 was installed within the former gasoline UST location.
 - Both soil samples collected from soil boring IEC-SB-1, installed within the former oil tank location, contained VOC concentrations exceeding RRSCOs, and the shallow sample collected at 7 to 9 feet bgs contained VOCs exceeding CSCOs.
 - SVOCs, specifically PAHs, were detected at elevated concentrations exceeding their respective CSCOs in the four (4) soil samples collected from borings IEC-SB-1 and IEC-SB-2. Soil sample IECSB-3 (2'-4') contained PAH concentrations exceeding their respective RRSCOs.

- Multiple samples had several pesticides detected at concentrations exceeding UUSCOs, the
 exceedances included: delta-BHC, lindane, alpha-BHC, beta-BHC, heptachlor, aldrin, endrin,
 dieldrin, 4,4'-DDE, 4,4'-DDD, 4,4'-DDT and cis-chlordane. Beta-BHC, Aldrin and Dieldrin exceeded
 RRSCOs in IECSB-6 (12'-14').
- Several metals, including barium, copper, and mercury were detected at concentrations exceeding RRSCOs and UUSCOs. Additionally, arsenic, lead and zinc were detected at concentrations exceeding CSCOs in the fill material identified at the Site.
- Installation of three (3) permanent groundwater monitoring wells to 20 feet bgs. One (1) groundwater sample was collected from each monitoring well.
 - One (1) groundwater sample contained VOCs, including benzene, isopropylbenzene, npropylbenzene and 1,2,4,5-tetramethylbenzene, exceeding AWQS. All three (3) groundwater samples contained metals at concentrations exceeding AWQS.
- Installation of four (4) semi-permanent sub-slab soil vapor points. Following installation, one (1) 8-hour soil vapor sample was collected from each point.
 - Only one (1) exceedance of the NYSDOH Matrices was detected in sub-slab soil vapor sample SV-1 for trichloroethene.

In general, concentrations of PAHs and metals in soil throughout the Site are consistent with regional historic fill. One (1) hot-spot was identified in the area of a former fuel oil UST and a former gasoline UST. Soil and groundwater within this hot-spot contained elevated concentrations of petroleum-related VOCs and SVOCs. A GPR survey conducted at the Site did not identify anomalies indicative of a UST, however, access to portions of the Site was limited by obstructions at the time of the survey.

Should contamination be identified during scope of the project activities outlined in Section 1.3 of this document, the contingencies detailed in this SMP will be followed, with the appropriate notification to the regulatory authorities.

2.0 SOILS MANAGEMENT PLAN

2.1 Soil Screening Methods

Visual, olfactory and PID soil screening and assessment will be conducted during invasive work related to construction activities under the supervision of a Qualified Environmental Professional and will be reported to DEC at the end of construction activities.

2.2 Stockpile Methods

If evidence of contamination is identified in the areas subject to excavation under the scope of this SMP, the contaminated soils will be stockpiled separately and will be segregated from clean soil and construction materials. Stockpiles will be used for each test pit location and will be removed as soon as practicable. While stockpiles are in place, they will be inspected daily, and before and after every storm event. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by DEC. Excavated soils will be stockpiled on, at minimum, double layers of 8-mil minimum sheeting, will be kept covered at all times with appropriately anchored plastic tarps, and will be routinely inspected. Broken or ripped tarps will be promptly replaced.

All stockpile activities will be compliant with applicable laws and regulations. Soil stockpile areas will be appropriately graded to control run-off in accordance with applicable laws and regulations. Stockpiles of excavated soils and other materials shall be located at least of 50 feet from the property boundaries, where possible. Hay bales or equivalent will surround soil stockpiles except for areas where access by equipment is required. Silt fencing and hay bales will be used as needed near catch basins, surface waters and other discharge points.

2.3 Characterization of Excavated Materials

Soil/fill or other excavated media that is transported off-Site for disposal will be sampled in a manner required by the receiving facility, and in compliance with applicable laws and regulations. Soils proposed for reuse on-Site will be managed as defined in this plan.

2.4 Materials Excavation, Load-Out and Departure

The QEP overseeing the project will:

- Oversee the excavation and load-out of excavated material;
- Ensure that there is a party responsible for the safe execution of invasive and other work performed under this work plan;

Soil Management Plan Impact Environmental Closures, Inc.

- Ensure that the presence of utilities and easements on the Site has been investigated and that any identified risks from work proposed under this plan are properly addressed by appropriate parties;

Ensure that all loaded outbound trucks are inspected, washed andcleaned, if necessary, before leaving the
 Site;

- Ensure that all egress points for truck and equipment transport from the Site will be kept clean of Sitederived materials during the project.

Locations where vehicles exit the Site shall be inspected daily for evidence of soil tracking off premises. Cleaning of the adjacent streets will be performed as needed to maintain a clean condition with respect to Site-derived materials.

Open and uncontrolled mechanical processing of historical fill and contaminated soil on-Site will not be performed without prior DEC approval.

2.5 Off-Site Materials Transport

Materials transport off-site is not anticipated for the purposes of this SMP pertaining to the installation of eight test pits. Should off-site transport of materials be needed, loaded vehicles leaving the Site will comply with all applicable materials transportation requirements (including appropriate covering, manifests, and placards) in accordance with applicable laws and regulations, including use of licensed haulers in accordance with 6 New York Codes, Rules and Regulations NYCRR Part 364. If loads contain wet material capable of causing leakage from trucks, truck liners will be used. Queuing of trucks will be performed on-Site, when possible, in order to minimize off Site disturbance. Off-Site queuing will be minimized.

Outbound trucks will follow the NYC Truck Route Network. This routing considers the following factors: (a) limiting transport through residential areas and past sensitive sites; (b) use of mapped truck routes; (c) minimizing off-Site queuing of trucks entering the facility; (d) limiting total distance to major highways; (e) promoting safety in access to highways; and (f) overall safety in transport. To the extent possible, all trucks loaded with Site materials will travel from the Site using these truck routes. Trucks will not stop or idle in the neighborhood after leaving the project Site.

From the Site Trucks can travel south on 3rd Avenue, turn east on Prospect Avenue to the entrance for the Gowanus Expressway.

2.6 Materials Disposal Off-Site

Material disposal off-site is not anticipated for the purposes of this SMP pertaining to the installation of eight (8) test pits. Should material disposal off-site be needed, the following documentation will be established and reported by the PE/QEP for each disposal destination used in this project to document that the disposal of regulated material exported from the Site conforms with applicable laws and regulations: (1) a letter from the PE/QEP or Applicant to each disposal facility describing the material to be disposed and requesting written acceptance of the material. This letter will state that material to be disposed is regulated material generated at an environmental remediation Site in New York under a governmental remediation program. The letter will provide the project identity and the name and phone number of the PE/QEP or Applicant. The letter will include as an attachment a summary of all chemical data for the material being transported; and (2) a letter from each disposal facility stating it is in receipt of the correspondence (1, above) and is approved to accept the material. These documents will be reported to DEC at the end of construction activities and before obtaining a Certificate of Occupancy or Department of Building Letter of Completion.

The report will include an itemized account of the destination of all material removed from the Site during this project. Documentation associated with disposal of all material will include records and approvals for receipt of the material.

All impacted soil/fill or other waste excavated and removed from the Site will be managed as regulated material and will be disposed in accordance with applicable laws and regulations. Historic fill and contaminated soils taken off-Site will be handled as solid waste and will not be disposed at a NYS Part 360-16 Registration Facility (also known as a Soil Recycling Facility).

Waste characterization will be performed for off-Site disposal in a manner required by the receiving facility and in conformance with its applicable permits. Waste characterization sampling and analytical methods, sampling frequency, analytical results and QA/QC will be reported to DEC as soon as the analytical results are obtained and before obtaining a Certificate of Occupancy or Department of Building Letter of Completion. A manifest system for off-Site transportation of exported materials will be employed. Manifest information will be reported to DEC at the end of construction activities. Hazardous wastes derived from on-Site will be stored, transported, and disposed of in compliance with applicable laws and regulations.

2.7 Materials Reuse On-Site

For the purposes of this SMP pertaining to the installation of eight (8) test pits, excavated material from each test pit location is planned to be reused onsite. Material will be stockpiled after excavation and replaced from the same location it was taken from.

Further excavation work will be detailed in a Remedial Action Work Plan (RAWP) designed for the Site.

Material reuse is not anticipated for the Site-wide excavation, however, should material planned to be reused, it must meet the soil cleanup objectives established in this plan in order to be reused onsite. The soil cleanup objectives for onsite reuse are listed in 6 NYCRR Part 375-6.8. The soil and fill that meets the criteria will be used as backfill within the excavation. "Reuse onsite" means material that is excavated during the project, does not leave the property, and is relocated within the same property and on comparable soil/fill material, and addressed pursuant to Engineering Controls. The QEP will ensure that reused materials are segregated from other materials to be exported from the Site and that procedures defined for material reuse in this SMP are followed.

Organic matter (wood, roots, stumps, etc.) or other waste derived from clearing and grubbing of the Site will not be buried onsite. Soil or fill excavated from the Site for grading or other purposes will not be reused within a cover soil layer or within landscaping berms.

2.8 Import of Backfill Soil from Offsite Sources

This Section presents the requirements for imported fill materials to be used during the project. Import pf material form offsite is not anticipated for the purposes of this SMP pertaining to the installation of eight (8) test pits. Should the import of offsite material be needed, a process will be established to evaluate sources of backfill and cover soil to be imported to the Site, and will include an examination of source location, current and historical use(s), and any applicable documentation. Material from industrial sites, spill sites, environmental remediation sites or other potentially contaminated sites will not be imported to the Site.

The following potential sources may be used pending attainment of soil quality objectives:

- Clean soil from construction projects at non-industrial sites in compliance with applicable laws and regulations;
- Clean soil from roadway or other transportation-related projects in compliance with applicable laws and regulations;
- Clean recycled concrete aggregate (RCA) from facilities permitted or registered by the regulations of NYS
 DEC.
- Virgin stone & gravel sourced from licensed Quarries.
- Asphalt.

All materials received for import to the Site will be approved by a PE/QEP and will be in compliance with applicable City, State and Federal laws and requirements. The source of the fill, evidence that an inspection was performed on the source, chemical sampling results, frequency of testing, and a Site map indicating the locations where backfill or soil cover was placed will be reported to DEC at the end of construction activities.

While not currently planned to be used, if clean soil is required, all imported soils will meet DEC-approved backfill soil quality objectives for this Site. The backfill soil quality objectives are the lesser of the relevant NYSDEC 6 NYCRR Part 375-6.8 Restricted Use Class SCOs and the NYSDEC 6 NYCRR Part 375-6.8 groundwater protection SCOs.

Source Screening and Testing

Inspection of imported fill material will include visual, olfactory and PID screening for evidence of contamination.

Materials imported to the Site will be subject to inspection, as follows:

- Trucks with imported fill material will be in compliance with applicable laws and regulations and will enter the Site at designated locations;
- The QEP is responsible to ensure that every truck load of imported material is inspected for evidence of contamination; and
- Fill material will be free of solid waste including pavement materials, debris, stumps, roots, and other organic matter, as well as ashes, oil, perishables or foreign matter.

Recycled concrete aggregate (RCA) and quarry stone will be imported from facilities permitted or registered by NYSDEC or other out of state permitted facilities. Facilities will be reported to DEC at the end of construction activities. A PE/QEP is responsible to ensure that the facility is compliant with 6NYCRR Part 360 registration and permitting requirements for the period of acquisition of RCA. RCA and quarry stone imported from compliant facilities will not require additional testing, unless required by NYSDEC under its terms for operation of the facility. RCA imported to the Site must be derived from recognizable and uncontaminated concrete. RCA material is not acceptable for, and will not be used as cover material.

Where required, composite samples of imported soil will be taken at a minimum frequency of one sample for every 500 cubic yards of material. Once it is determined that the fill material meets imported backfill or cover soil chemical requirements and is non-hazardous, and lacks petroleum contamination, the material will be loaded onto trucks for delivery to the Site.

2.9 Fluids Management

All liquids to be removed from the Site, including dewatering fluids, will be handled, transported and disposed in accordance with applicable laws and regulations. Liquids discharged into the New York City sewer system will receive prior approval by New York City Department of Environmental Protection (NYC DEP). The NYC DEP regulates discharges to the New York City sewers under Title 15, Rules of the City of New York Chapter 19. Discharge to the New York City sewer system will require an authorization and sampling data demonstrating that the groundwater meets the City's discharge criteria. The dewatering fluid will be pretreated as necessary to meet the NYC DEP discharge criteria. If discharge to the City sewer system is not appropriate, the dewatering fluids will be managed

by transportation and disposal at an offsite treatment facility. Discharge of water generated during construction to surface waters (i.e. a stream or river) is prohibited without a SPDES permit issued by New York State Department of Environmental Conservation.

2.10 Storm-water Pollution Prevention

Applicable laws and regulations pertaining to storm-water pollution prevention will be addressed during the project. Erosion and sediment control measures (silt fences and barriers, and hay bale checks) will be installed around the entire perimeter of the construction area and inspected once a week and after every storm event to ensure that they are operating appropriately. Discharge locations will be inspected to determine whether erosion control measures are effective in preventing significant impacts to receptors. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by DEC. All necessary repairs shall be made immediately. Accumulated sediments will be removed as required to keep the barrier and hay bale check functional. Undercutting or erosion of the silt fence anchor will be repaired immediately with appropriate backfill materials. Manufacturer's recommendations will be followed for replacing silt fencing damaged due to weathering.

2.11 Contingency Plan

This contingency plan is developed to address the discovery of unknown structures or contaminated media during excavation. Identification of unknown contamination source areas during invasive Site work will be promptly communicated to DEC's Project Manager. Petroleum spills will be reported to the NYSDEC Spill Hotline. If previously unidentified contaminant sources are found during excavation, sampling will be performed on contaminated source material and surrounding soils and reported to DEC. Chemical analytical testing will be performed for Full List volatiles and semi-volatiles, pesticides/PCBs, and TAL metals, as appropriate.

2.12 Odor, Dust and Nuisance Control

Odor Control

All necessary means will be employed to prevent on- and offsite odor nuisances. At a minimum, procedures will include: (a) limiting the area of open excavations; (b) shrouding open excavations with tarps and other covers; and (c) use of foams to cover exposed odorous soils. If odors develop and cannot otherwise be controlled, additional means to eliminate odor nuisances will include: (d) direct load-out of soils to trucks for offsite disposal; and (e) use of chemical odorants in spray or misting systems.

This odor control plan is capable of controlling emissions of nuisance odors. If nuisance odors are identified, work will be halted and the source of odors will be identified and corrected. Work will not resume until all nuisance odors have been abated. DEC will be notified of all odor complaint events. Implementation of all odor controls, including halt of work, will be the responsibility of the PE/QEP's certifying the summary letter which will be provided to DEC prior to obtaining a Certificate of Occupancy or Department of Building Letter of Completion.

Dust Control

Dust management during invasive onsite work will include, at a minimum:

- Use of a dedicated water spray methodology for roads, excavation areas and stockpiles.
- Use of properly anchored tarps to cover stockpiles.
- Exercise extra care during dry and high-wind periods.
- Use of gravel or recycled concrete aggregate on egress and other roadways to provide a clean and dustfree road surface.

This dust control plan is capable of controlling emissions of dust. If nuisance dust emissions are identified, work will be halted and the source of dusts will be identified and corrected. Work will not resume until all nuisance dust emissions have been abated. DEC will be notified of all dust complaint events. Implementation of all dust controls, including halt of work, will be the responsibility of the QEP's responsible for certifying the Closure Report. This report will be submitted to DEC at the completion of the project, detailing all environmental work undertaken.

Other Nuisances

Noise control will be exercised during the project. All work will conform, at a minimum, to NYC noise control standards.

Rodent control will be provided, during Site clearing and grubbing, and during the project, as necessary, to prevent nuisances.

3.0 REPORTING


The following field observations will be made and recorded:

- 1. A description and photographic documentation of the excavation(s).
- 2. Examination of the excavation floor and sidewalls for physical evidence of contamination (odor, staining, sheen, etc.).
- 3. Periodic field screening (through bucket return) of the floor and sidewalls of the excavation, with a calibrated photoionization detector (PID).
- 4. All field data and information will be reported to the NYSDEC in Daily Update Reports.

PLATES

585 Union Street, Brooklyn, New York



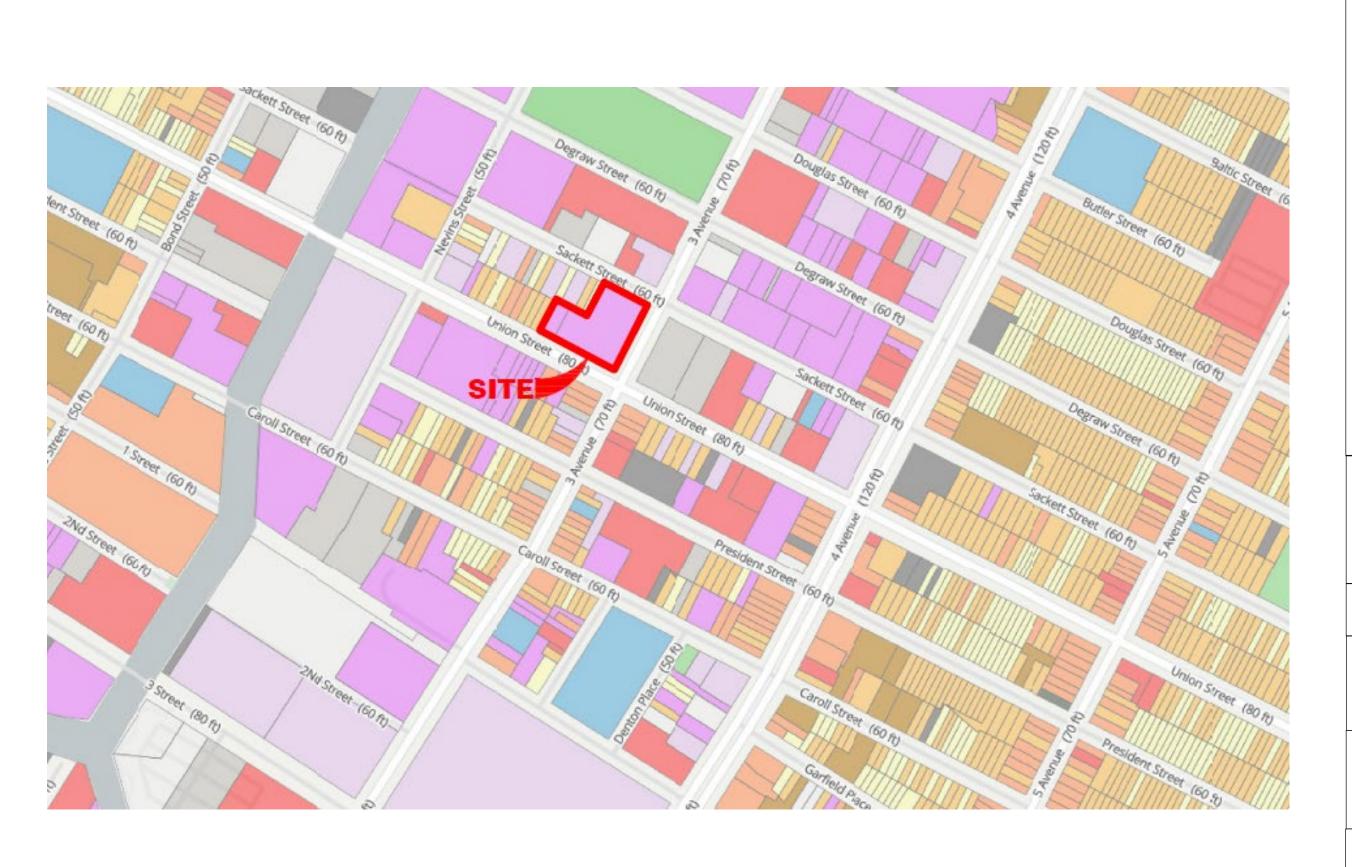

Zoning and Land Use

Tax Lots

One & Two Family Buildings

Multi-Family Walk-Up Buildings

Multi-Family Elevator Buildings
Mixed Residential & Commercial Buildings

Commercial & Office Buildings

Industrial & Manufacturing

Transportation & Utility

Public Facilities & Institutions

Open Space & Outdoor Recreation

Parking Facilities

Vacant Land

Other

Notes:

Base map taken from NYCDCP online tool 'ZOLA' accessed 3/5/2020

SITE PLAN


585 Union Street, Brooklyn, NY	PLATE No: 01	
	PROJECT#	14729
	DRAWN BY	DLP
	CHECKED BY	DLP
	DATE	2-1-22
	Revis	sions



T ENVIDONMENTA

IMPACT ENVIRONMENTAL CLOSURES, INC.

170 KEYLAND COURT BOHEMIA, NEW YORK 11716 TEL (631) 269-8800 FAX (631) 269-1599

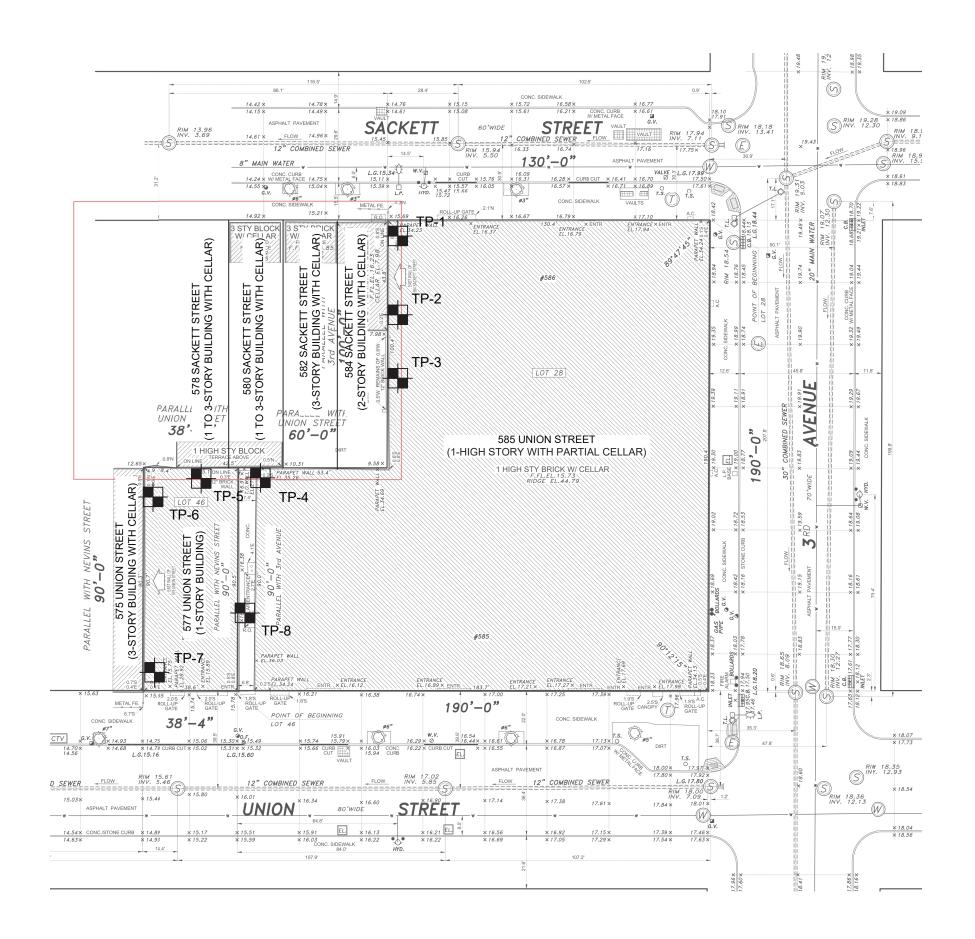




LEGEND



2022 GES PROPOSED TEST PIT

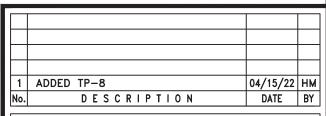

GES GEOTECHNICAL ENGINEERING SERVICES, P.C.

6 BAYBERRY ROAD ELMSFORD, NEW YORK 10523 PHONE 914-592-4616 FAX 914-592-0416

> 577-585 UNION STREET BROOKLYN, NY

BLOCK: 433 LOT: 28, 46 ZONE:

PROPOSED TEST PITS **LOCATION PLAN**

UNAUTHORIZED ALTERATION OR ADDITION TO THIS PLAN IS A VIOLATION OF SECTION 7209 OF THE NYS EDUCATION LAW. COPIES OF THIS PLAN NOT BEARING THE PROFESSIONAL ENGINEER'S INKED SEAL OR EMBOSSED SEAL SHALL NOT BE CONSIDERED TO BE A VALID TRUE COPY.

PROJECT #:	2021038
SCALE:	NTS
DATE:	3/22/2022
DRAWING NO:	B-100.00
SHEET NO:	

PROFESSIONAL ENGINEER

1 OF 1

APPENDICES

585 Union Street, Brooklyn, New York



APPENDIX A Construction Health and Safety Plan

585 Union Street, Brooklyn, New York



CONSTRUCTION HEALTH AND SAFETY PLAN

NYSDEC BROWNFIELD CLEANUP PROGRAM

Submitted for:

585 Union Street 577-599 Union Streeet (also known as 586 Sackett Street) Brooklyn, New York County Tax Map Designation: Block 433; Lot 28

Submitted to:

New York State Department of Environmental Remediation, Region 2 Division of Environmental Remediation 625 Broadway Albany, New York 12233-7016

Prepared for:

Gowanus Union Street LLC 19 West 24th Street, 12th Floor New York, NY, 10010

February 2, 2022 IEC Project Number: #14729



TABLE OF CONTENTS

Section	n Topic	Page
1	Introduction	
1.1	Purpose	
2	Application of Health and Safety Plan	
2.1	Restoration Personnel	
2.2	Construction Personnel	
3	Key Personnel / Identification of Health & Safety Personnel	
3.1	Key Personnel	
3.2	Organizational Responsibility	
3.2.1	Senior Project Manager	
3.2.2		
3.2.3		
3.2.4		
4	Chemical Hazard Analysis and Control Measures	
4.1	Volatile Organic Compounds	
4.2	Semi-Volatile Organic Compounds	
4.3	Total Metals	
5	Health and Safety Risk Analysis	
5.1	Explosion and Fire	
5.1.1		
5.1.2	3 /3	
5.1.3		
5.2	Operational Safety Hazards	
5.2.1	, , , , , ,	
5.2.2	27	
5.3	Noise Hazards	
5.4	Safe Material Handling	
5.5	Temperature Hazards	
5.5.1	***	
5.5.2		
5.6	Cold Exposure Hazards	
5.7	Community Air Monitoring Program (CAMP)	
6	Personnel Training	
6.1	Pre-assignment and OSHA Training	
6.2	Respirator Requirements	
6.2.1	Respirator Requirements and Fit Testing	
6.2.2		
7	Personal Protective Equipment	
7.1.1	Levels of Protection	
7.1.2		
7.1.3	Modified Level D Personal Protective Equipment	
7.1.4	Level C Personal Protective Equipment	
7.1.5	Level B Personal Protective Equipment	
7.1.6	4.7	
8	Work Zones	
8.1	Work Zone Definitions	
8.1.1	Exclusion Zone (EZ)	
8.1.2	,	
8.1.3		
9	General Safety and Health Provisions	
9.1	Safety Practices / Standing Orders	23

9.2	Buddy System	24
9.3	Site Communications Plan	
9.4	Retention of Records	24
10	Decontamination Plan	25
10.1	General	25
10.2	Minimum Decontamination Procedure	25
10.3	Standard Decontamination Procedure	26
10.3.	.1 Level B	26
10.3.	.2 Level C and Level D	26
10.4	Heavy Equipment and Handling Equipment Decontamination	26
11	Emergency Response / Contingency Plan	28
11.1	Pre-Emergency Planning	28
11.2	Emergency Contact Information	28
11.2.	.1 Emergency Contacts	28
11.2.	.2 Utility Emergencies / Initiating Subsurface Investigation Work	32
11.3	Contingency / Evacuation Plan	31
11.4	Emergency Medical Treatment Procedures	31
11.4.	.1 Standard Procedures for Injury	32
11.4.	.2 Chemical Overexposure	32
11.4.	.3 First Aid for Injuries Incurred During Field Work	33
11.4.	.4 First Aid Equipment List	33
11.4.	.5 Other Emergency Equipment	34
11.5	Record of Injuries Incurred On-Site	34
11.5.	.1 Occupational Injuries and Illnesses Form (OSHA 200)	34
11.5.		

APPENDICES

Appendix A: Acknowledgment Statement

Appendix B: OSHA Respirator Medical Evaluation Questionnaire

Appendix C: OSHA Form 200-Occupational Injuries & Illnesses

Appendix D: Safety Data Sheets

Appendix E: Accident Report Form

1 Introduction

This Construction Health and Safety Plan (CHASP) describes the procedures to be followed in order to reduce employee exposure to potential health and safety hazards that may be present during environmental investigation activities being performed at the Site. The emergency response procedures necessary to respond to such hazards are also described within this CHASP. All activities performed under this CHASP are targeted to comply with Occupational Safety and Health Administration (OSHA) Regulations 29 CFR Part 1910.1025.

This document is not, nor does it purport to be, a complete description of all safety and health requirements applicable to work performed at the site. Rather, the CHASP is a general overview of the compliance policies and work practices applicable to the primary tasks and hazards associated with the environmental assessment portion of the development project, as well as a recitation of <u>minimum</u> safety and health compliance obligations for contractors, subcontractors and workers at the site. All subcontractors of any tier operating at the worksite are obligated to implement and maintain comprehensive safety and health plans for their own employees and to ensure that their employees comply with all applicable safety and health requirements. All subcontractors operating at the worksite should refer to the applicable specific OSHA Standards for detailed requirements.

1.1 Purpose

The purpose of this CHASP is to provide the contractors' field personnel, as well as other site-occupants, with an understanding of the potential chemical and physical hazards that exist or may arise while portions of this project are being performed. To this end, this CHASP also presents information on the progression of the environmental restoration activities and specific details regarding the handling of materials excavated from the Site.

The primary objective is to ensure the well being of all field personnel and the community surrounding this site. In order to accomplish this, project staff and approved subcontractors of any tier shall acknowledge and adhere to the policies and procedures established herein. Accordingly, all personnel assigned to the remediation activities associated with this project (Remedial Personnel) shall read this CHASP and sign the Agreement and Acknowledgment Statement (Appendix A) to certify that they have read, understood, and agree to abide by its provisions. A copy of this CHASP will be available to anyone that requests it. Personnel involved in construction activities (Construction Personnel) and other Personnel (e.g. government officials, administrators, bank inspectors, assessors, etc.) that will have limited exposure to the site native soil/fill material during construction activities will be instructed on how to reduce the probability of exposure to site contaminants, but will not be required read the CHASP.

2 Application of Health and Safety Plan

The procedures of this CHASP apply for any person that will enter the boundaries of the site or a portion of the Site during environmental investigation/remediation activities or construction, until the existing soil/fill material has been covered with either a paved surface or an uncontaminated soil cap. When the Project Manager has designated an area of the site as clear of any environmental issues, construction contractors and subcontractors of any tier will perform the balance of the work in accordance with their individual OSHA-compliant corporate CHASP.

2.1 Restoration Personnel

Employees of contractors and subcontractors of any tier performing the following activities will be considered Restoration Personnel:

- Excavation of native soil/fill material
- Loading of native soil/fill onto vehicles
- Processing of native soil/fill into components
- Transporting of native soil/fill across the site
- Sampling of native soil/fill material for subsequent physical or chemical analysis
- Cleaning or decontaminating equipment or personnel
- Handling of ground waters

All subcontractors, of any tier, must submit a CHASP to the Site Health and Safety Officer for review and approval prior to mobilizing to the site. Only CHASPs that comply with this CHASP will be approved. Where a subcontractors CHASP is deficient, the Site Health and Safety Officer will provide written notification of any required changes. Approved CHASPs will be submitted to the Project Manager and retained on-site for reference by the Site Health and Safety Officer.

2.2 Construction Personnel

For this document, "Construction Personnel" is the term given for those employees of contractors and subcontractors of any tier performing activities associated with site development other than those performed by the Remedial Personnel. This designation does not preclude that Construction Personnel will traverse or work upon native soil/fill material, rather, it infers that it will not involve performing tasks that will create a route of exposure to the contaminants contained therein. Construction Personnel will receive instruction to limit the potential for exposure to these contaminants. Construction Personnel will be prohibited from entering Environmental Remediation Areas (i.e., active excavation / handling / processing areas, loading areas, exclusion zones or support zones).

3 Key Personnel / Identification of Health & Safety Personnel

3.1 Key Personnel

A list of the pertinent personnel authorized to be present on site is as follows:

<u>Title</u>	Name	Telephone Number
Senior Project Manager Impact Environmental	Kevin Kleaka	(O) 631-269-8800 ext: 129 (C) 631-252-5480
Project Manager Impact Environmental	Diana Posten	(O) 631-269-8800 ext: 189 (C) (631) 664-4425
Field Operations Leader Impact Environmental	Manan Dalal	(O) 631-269-8800 ext: 121 (C) 631-901-2470
Site Health & Safety Officer Impact Environmental	Leif Robertson	(O) 631-269-8800 ext: 197 (C) 631-275-4865

3.2 Organizational Responsibility

3.2.1 Senior Project Manager

The Senior Project Manager will be responsible for implementing the project and obtaining any necessary personnel or resources for the completion of the project. Specific duties will include:

- Selecting a Site Health and Safety Officer and field personnel for the work to be undertaken on site;
- Providing authority and resources to ensure that the Site Health and Safety Officer is able to implement and manage safety procedures;
- Preparing reports and recommendations about the project to clients and affected personnel;
- Ensuring that all persons allowed to enter the site (e.g., EPA, contractors, state officials, visitors) are made aware of the potential hazards associated with the substances known or suspected to be on site, and are knowledgeable as to the on-site copy of the specific CHASP; and
- Ensuring that the Site Health and Safety Officer is aware of all of the provisions of this CHASP and is
 instructing all personnel on site about the safety practices and emergency procedures defined in the
 plan.

3.2.2 Project Manager

The Project Manager will be responsible for implementing the Senior Project Manager' duties as well as oversee activities regarding the project both in the field and in the office as well as interact with environmental regulatory agencies, sub-contractors and internal company personnel.

- Coordinating the activities of all construction and Remedial Personnel, to include informing them of the required Personal Protective Equipment (PPE) and ensuring their signature acknowledging this CHASP;
- Ensuring that the tasks assigned are being completed as planned and on schedule; and
- Serving as liaison with public officials where there is no Public Affairs official designated.

3.2.3 Field Operations Leader

The Field Operations Leader will be responsible for field operations and safety. Specific duties will include, but are not limited to:

- Scheduling with the construction company and their subcontractors;
- Coordinating with the Site Health and Safety Officer in determining protection levels;
- Documenting field activities;
- Coordinate activities between environmental and construction personnel;
- Coordination with waste management contractors; and
- Review and approval of waste disposal facilities.

In the event that the Project Manager and the Site Health and Safety Officer are not on site, the Field Operations Leader will assume all responsibility of the Site Health and Safety Officer.

3.2.4 Site Health and Safety Officer

The Site Health and Safety Officer shall be responsible for the implementation of the CHASP on site. Specific duties will include:

- Monitoring the compliance of construction and environmental remediation activities personnel (field personnel) for the routine and proper use of the PPE that has been designated for each task;
- Routinely inspecting PPE and clothing to ensure that it is in good condition and is being stored and maintained properly;
- Stopping work on the site or changing work assignments or procedures if any operation threatens the health and safety of workers or the public;
- Monitoring personnel who enter and exit the site and all controlled access points;

- Reporting any signs of fatigue, work-related stress, or chemical exposures to the Project Manager;
- Dismissing field personnel from the site if their actions or negligence endanger themselves, coworkers, or the public, and reporting the same to the Project Manager;
- Reporting any accidents or violations of the CHASP plan to the Project Manager and documenting the same for the project in the records;
- Knowing emergency procedures, evacuation routes, and the telephone numbers of the ambulance, local hospital, poison control center, fire and police departments;
- Ensuring that all project-related personnel have signed the personnel agreement and acknowledgments form contained in this CHASP; and
- Coordinate upgrading and downgrading PPE as necessary due to changes in exposure levels, monitoring results, weather, and other site conditions.

4 Chemical Hazard Analysis and Control Measures

Based on historical subsurface investigations performed at the Site in 2019 and 2020 by Roux Associates (Roux) and Impact Environmental Consultants (IEC), the contaminants of concern include the following:

- Volatile organic compounds (VOC's) identified in soil: benzene, toluene, ethylbenzene, total xylenes, n-propylbenzene, 1,3,5-trimethylbenzene and 1,2,4-trimethylbenzene;
- Semi-volatile organic compounds (SVOC's) identified in soil: benzo(a)anthracene, benzo(a)pyrene,
 benzo(b)fluoranthene, chrysene, dibenzo(a,h)anthracene, and indeno(1,2,3-cd)pyrene, fluoranthene,
 naphthalene, dibenzofuran, 2-methylphenol, 3-methylphenol/4-methylphenol;
- Metals identified in soil: arsenic, barium, copper, lead, mercury, nickel and zinc;
- VOCs identified in groundwater: benzene, isopropylbenzene, n-propylbenzene and 1,2,4,5tetramethylbenzene;
- Metals identified in groundwater: Arsenic (total), barium (total), chromium (total), iron (total), lead (total), magnesium (total), manganese (total), nickel (total), sodium (total) and thallium (total).
- VOCs identified in soil vapor: Trichloroethene (TCE).

VOCs, SVOCs and metals were detected in both soil and groundwater samples. In addition, TCE was detected in soil vapor samples. A summary of the health hazards associated with the contaminant of concerns are shown below.

4.1 Volatile Organic Compounds

The supplemental remedial investigation performed at the Site have identified gasoline related VOC's in soil and groundwater, as well as TCE in soil vapor.

Soil and groundwater sample results indicated elevated concentrations of VOCs, including benzene, toluene, ethylbenzene and total xylenes, in samples located adjacent to a former heating oil underground storage tanks (UST) and a former gasoline UST. In addition, soil vapor sampling results indicate elevated concentrations of TCE in sample SV-1, located in the western warehouse building. Prolonged exposure to VOCs above their respective OSHA permissible exposure limits may result in irritation of the mucous membranes of the respiratory system, eyes, and mouth. Overexposure to VOCs may also result in the depression of the central nervous system. Symptoms may include drowsiness, headache, and fatigue.

4.2 Semi-Volatile Organic Compounds

The supplemental remedial investigation performed at the Site have identified Polycyclic Aromatic Hydrocarbons (PAHs) related SVOC's in soil above applicable standards throughout the Site. These SVOCs include Benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene, dibenzo (a,h)anthracene, and indeno(1,2,3-cd)pyrene.

In addition, soil samples collected adjacent to a former heating oil UST and a former gasoline UST contained elevated concentrations of SVOCs related to fuel oil. Prolonged exposure to SVOCs above OSHA permissible exposure limits may result in adverse health effects including endocrine and thyroid disruption, immunotoxicity, reproductive toxicity, cancer, and adverse effects on fetal and child development and neurologic function.

4.3 Total Metals

The supplemental remedial investigation performed at the Site have identified heavy metals in soil and groundwater throughout the Site. Specifically, arsenic, barium, cadmium, copper, lead, mercury, nickel and zinc.

Prolonged exposure to the above mentions metals above OSHA permissible exposure limits may result in adverse health effects including endocrine and thyroid disruption, immunotoxicity, reproductive toxicity, cancer, and adverse effects on fetal and child development and neurologic function.

5 Health and Safety Risk Analysis

The field tasks covered by the CHASP will include supplemental investigated task such as, drilling, and containerization of soil/groundwater/soil vapor samples. Additionally, standard job task hazards that are inherent to an investigative project will exist.

5.1 Explosion and Fire

This Section is not, nor does it purport to be, a comprehensive recitation of safety and health requirements applicable to explosion and fire. Rather, contractors, subcontractors and workers at the site must refer to OSHA's Fire Protection and Prevention Standard, set forth at 29 C.F.R. § 1910 part 1926.35, as well as all supporting OSHA Compliance Directives and Letters of Interpretation, for complete information on safety and health compliance obligations. The following are possible fire and explosion hazards that may be encountered on the job site along with fire preventive measures to take.

5.1.1 Flammable Vapors

The presence of flammable vapors can pose a potential fire and health hazard. Hazard reduction procedures include monitoring the ambient air with an oxygen/LEL meter (combustible gas indicator). If the LEL reading exceeds 20%, all work will stop and employees will leave the site immediately and contact the fire department. For OSHA-defined "confined space" activities, work will stop if the LEL reading exceeds 10%.

5.1.2 High Oxygen Levels

Atmospheres that contain a level of oxygen greater than 23% pose an extreme fire hazard (the usual ambient oxygen level is approximately 20.5%). All personnel encountering atmospheres that contain a level of oxygen greater than 23% must evacuate the site immediately and must notify the Fire Department. If the oxygen level is less than 19.5%, do not enter the space without level B PPE.

5.1.3 Fire Prevention

- During equipment operation, periodic vapor concentration measurements should be taken with an
 explosimeter or combustimeter. If at any time the vapor concentrations exceed 20% of the lower
 explosive limit (LEL), then the Site Health and Safety Officer or designated field worker should
 immediately shut down all operations.
- Only approved safety cans will be used to transport and store flammable liquids.
- All gasoline and diesel-driven engines requiring refueling must be shut down and allowed to cool prior to filling.
- Smoking is not allowed during any operations within the work area in which petroleum products or solvents in free-floating, dissolved, or vapor forms, or other flammable liquids may be present.
- No open flame or spark is allowed in any area containing petroleum products or other flammable liquids.

5.2 Operational Safety Hazards

This Section is not, nor does it purport to be, a comprehensive recitation of safety and health requirements applicable to earth moving equipment. Rather, contractors, subcontractors and workers at the site must refer to OSHA's Excavation Standard, set forth at 29 C.F.R. § 1910 Subpart P as well as all supporting OSHA Compliance Directives and Letters of Interpretation, for complete information on safety and health compliance obligations.

5.2.1 Heavy Machinery / Equipment

All site employees must remain aware of those site activities that involve the use of heavy equipment and machinery. Respiratory protection and protective eyewear may be worn frequently during site activities. This protective equipment significantly reduces peripheral vision of the wearer. Therefore, it is essential that all employees at the site exercise extreme caution during operation of equipment and machinery to avoid physical injury to themselves or others.

5.2.2 Vehicular Traffic

All employees will be required to wear a fluorescent safety vest at all times while on site. In addition, supplemental traffic safety equipment use can be exercised when warranted by specific task. Supplemental equipment can be items such as cones, flags, barricades, and/or caution tape. Drivers of waste transportation vehicles will only exit vehicles in designated areas within the Support Zone. During this time, drivers will only be allowed to inspect the placement of waste loads and cover their trailers.

5.3 Noise Hazards

This Section is not, nor does it purport to be, a comprehensive recitation of safety and health requirements applicable to noise hazards. Rather, contractors, subcontractors and workers at the site must refer to OSHA's Occupational Noise Exposure Standard, set forth at 29 C.F.R. § 1910 part 1926.52, as well as all supporting OSHA Compliance Directives and Letters of Interpretation, for complete information on safety and health compliance obligations.

Hearing protection shall be provided to the employees where sound pressure levels exceed 85 dB. Hearing protection shall be worn where sound pressure levels in areas and/or on equipment exceeds 90 dB. Typical heavy excavation operations have been monitored with a sound level meter and indicate that hearing protection is required for all personnel while engaged in this action.

5.4 Safe Material Handling

This Section is not, nor does it purport to be, a comprehensive recitation of safety and health requirements applicable to safe material (soil/fill) handling. Rather, contractors, subcontractors and workers at the site must refer to OSHA's Eye and Face, and Respiratory Safety Standards, set forth at 29 C.F.R. § 1910 Parts 1926.102 and 1926.103

as well as all supporting OSHA Compliance Directives and Letters of Interpretation, for complete information on safety and health compliance obligations.

Skin and eye contact with contaminated soil/fill or materials in contact with the soil/fill may occur during excavation, drilling, sampling, handling and decontamination activities. Nitrile gloves and approved safety glasses must be worn to prevent exposure to the associated contaminants. Employees working at or near (within ten feet of) excavation fronts could be required to wear respiratory protection. If necessary, all associated activities will be performed pursuant to 29 C.F.R. § 1910 Parts 1926.134 (a)(2) and 1926.55.

5.5 Temperature Hazards

This Section is not, nor does it purport to be, a comprehensive recitation of safety and health requirements applicable to temperature stresses. Rather, contractors, subcontractors and workers at the site must refer to OSHA's Technical Manual (TED 1-0.15A), Section III – Chapter 4 (1999) as well as all supporting OSHA Compliance Directives and Letters of Interpretation, for complete information on safety and health compliance obligations.

Since climatic changes cannot be avoided, work schedules will be adjusted to provide time intervals for intake of juices, juice products, and water in an area free from contamination and in quantities appropriate for fluid replacement to prevent heat stress conditions from occurring.

5.5.1 Types of Heat Stress

Heat stress may occur even in moderate temperature areas and may present any or all of the following:

5.5.1.1 Heat Rash

Result of continuous exposure to heat, humid air, and chafing clothes. Heat rash is uncomfortable and decreases the ability to tolerate heat.

5.5.1.2 Heat Cramps

Result of the inadequate replacement of body electrolytes lost through perspiration. Signs include severe spasms and pain in the extremities and abdomen.

5.5.1.3 Heat Exhaustion

Result of increased stress on the vital organs of the body in the effort to meet the body's cooling demands. Signs include shallow breathing; pale, cool, moist skin; profuse sweating; and dizziness.

5.5.1.4 Heat Stroke

Result of overworked cooling system. Heat stroke is the most serious form of heat stress. Body surfaces must be cooled and medical help must be obtained immediately to prevent severe injury and/or death. Signs include red,

hot, dry skin, absence of perspiration, nausea, dizziness and confusion, strong, rapid pulse that could lead to coma or death.

5.5.2 Heat Stress Prevention

- A. Replace body fluids (water and electrolytes) lost through perspiration. Solutions may include a 0.1% salt and water solution or commercial mixes such as "Gatorade". Employees must be encouraged to drink more than the amount required in order to satisfy thirst.
- B. Use cooling devices to aid the natural body ventilation. Cooling occurs through evaporation of perspiration and limited body contact with heat-absorbing protective clothing. Utilize fans and air conditioners to assist in evaporation. Long, cotton underwear is suggested to absorb perspiration and limit any contact with heat-absorbing protective clothing (i.e., coated Tyvek suits).
- C. Conduct non-emergency response activities in the early morning or evening during very hot weather.
- D. Provide shelter against heat and direct sunlight to protect personnel. Take breaks in shaded areas.
- E. Rotate workers utilizing protective clothing during hot weather.
- F. Establish a work regime that will provide adequate rest periods, with personnel working in shifts.

5.6 Cold Exposure Hazards

Work schedules will be adjusted to provide sufficient rest periods in a heated area for warming up during operations conducted in cold weather. Also, thermal protective clothing such as wind and/or moisture resistant outerwear is recommended to be worn.

If work is performed continuously in the cold at or below -7 °C (20 °F), including wind chill factor, heated warming shelters (tents, cabins, company vehicles, rest rooms, etc.) shall be made available nearby and the worker should be encouraged to use these shelters at regular intervals, the frequency depending on the severity of the environmental exposure. The onset of heavy shivering, frostnip, the feeling of excessive fatigue, drowsiness, irritability, or euphoria, are indications for immediate return to the shelter. When entering the heated shelter, the outer layer of clothing shall be removed and the remainder of the clothing loosened to permit sweat evaporation. A change of dry work clothing shall be provided as necessary to prevent workers from returning to their work with wet clothing.

Dehydration, or the loss of body fluids, occurs in the cold environment and may increase the susceptibility of the worker to cold injury due to a significant change in blood flow to the extremities. Warm sweet drinks and soups should be provided at the work site to provide caloric intake and fluid volume. The intake of coffee should be limited because of a diuretic and circulatory effect (adapted from TLV's and Biological Exposure Indices 1988-1989, ACGIH).

5.7 Community Air Monitoring Program (CAMP)

Real-time air monitoring for VOCs and/or particulate levels at the perimeter of the exclusion zone or work area will be necessary during the Remedial Investigation as Per NYSDEC DER-10 Technical Guidance for Site Investigation and Remediation.

- Continuous monitoring will be required for all ground intrusive activities and during the demolition of contaminated or potentially contaminated structures. Ground intrusive activities include, but are not limited to, soil/waste excavation and handling, test pitting or trenching, and the installation of soil borings or monitoring wells.
- Periodic monitoring for VOCs will be required during non-intrusive activities such as the collection of soil and sediment samples or the collection of groundwater samples from existing monitoring wells. "Periodic" monitoring during sample collection might reasonably consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. In some instances, depending upon the proximity of potentially exposed individuals, continuous monitoring may be required during sampling activities. Examples of such situations include groundwater sampling at wells on the curb of a busy urban street, in the midst of a public park, or adjacent to a school or residence.

VOC Monitoring, Response Levels, and Actions

Volatile organic compounds (VOCs) must be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis or as otherwise specified. Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions, particularly if wind direction changes. The monitoring work should be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment should be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment should be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring

continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.

- 3 If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.
- 4 All 15-minute readings must be recorded and be available for State (DEC and NYSDOH) personnel to review. Instantaneous readings, if any, used for decision purposes should also be recorded.

Particulate Monitoring, Response Levels, and Actions

Particulate concentrations should be monitored continuously at the upwind and downwind perimeters of the exclusion zone at temporary particulate monitoring stations. The particulate monitoring should be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment must be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during all work activities.

- If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m3) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques must be employed. Work may continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed 150 mcg/m3 above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than 150 mcg/m3 above the upwind level, work must be stopped and a re-evaluation of activities initiated. Work can resume provided that dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within 150 mcg/m3 of the upwind level and in preventing visible dust migration.
- 7 All readings must be recorded and be available for State (DEC and NYSDOH) and County Health personnel to review.

6 Personnel Training

6.1 Pre-assignment and OSHA Training

All Remedial Personnel that will be in direct contact (that is hand digging, sampling, processing) with the native soil/fill materials must complete an initial 40-hour Hazardous Waste Operations and Emergency Response (HAZWOPER) training course and, where necessary, a current eight hour refresher course (as required annually after initial 40-hour training completion). Restoration Personnel that will not be in direct contact with native soil/fill materials are only required to prove they have read and understood the procedures presented in this CHASP.

On-site managers and supervisors of Restoration Personnel (Field Operations Leader, Site Health and Safety Officer) directly responsible for employees engaged in hazardous substance operations have received an initial 40-hour HAZWOPER training course and an additional (above the 40-hour HAZWOPER) eight hours of supervisory training. These training requirements comply with the OSHA Hazardous Waste Operations and Emergency Response Regulation, 29 CFR 1910.120. The Site Health and Safety Officer will be certified in First Aid and Cardiovascular Pulmonary Resuscitation.

The Site Health and Safety Officer will conduct an on-site training meeting for all Construction Personnel and observers that could potentially be exposed to the native soil/fill material during construction activities. Training meetings will be provided routinely for any new project personnel. This program will cover specific health and safety equipment and protocols and potential problems inherent to each project operation. The Site Health and Safety Officer will be present for any activities being performed by Construction Personnel that will involve the handling of soil/fill during construction activities to provide supervision on exposure reduction. This may include insuring the use of proper PPE and air quality monitoring.

6.2 Respirator Requirements

6.2.1 Respirator Requirements and Fit Testing

The OSHA respiratory protection standard, 29 CFR 1910.134, under paragraph (f)(2), requires fit testing for all employees using tight fitting respirators including filtering facepiece respirator. The fit test must be performed before the respirator is used and must be repeated at least annually and whenever a different respirator facepiece is used or a change in the employee's physical condition could affect the respirator fit.

The user seal check is a separate requirement under paragraph (g)(1)(iii) and must be performed each time the employee dons the respirator. Employers must adhere to the recommendations of the respirator's manufacturer; different manufacturers recommend different procedures.

6.2.2 Medical Surveillance

OSHA requires a medical evaluation to determine whether each employee required to wear a respirator is physically able to wear a respirator and perform the work. This evaluation can be a medical examination or an evaluation of employee responses to the OSHA Respirator Medical Evaluation Questionnaire located in **Appendix B** of the Respiratory Protection Standard. Either method must be performed by a physician or other licensed healthcare professional. **Appendix C** has a copy of the forms to be completed.

A medical examination may be necessary whenever the employee gives a positive response to any of questions 1 through 8 in Appendix B, Part A, Section 2.

7 Personal Protective Equipment

This Section is not, nor does it purport to be, a comprehensive recitation of safety and health requirements applicable to personal protective equipment. Rather, contractors, subcontractors and workers at the site must refer to OSHA's Personal Protective Equipment Standard, set forth at 29 C.F.R. § 1910.Part 1926.28(a) as well as all supporting OSHA Compliance Directives and Letters of Interpretation, for complete information on safety and health compliance obligations.

The purpose of personal protective clothing and equipment (PPE) is to shield or isolate individuals from the chemical, physical, and biological hazards that may be encountered on-site when engineering and other controls are not feasible or cannot provide adequate protection. Careful selection and use of adequate PPE should protect the health of all on-site workers. No single combination of PPE is capable of protecting against all hazards. Therefore, PPE should be used in conjunction with, not in place of, other protective methods, such as engineering controls and safe work practices.

Site-specific chemicals of concern include semi-volatile organic compounds. These chemicals are of moderate to low hazard. Therefore, level D personal protective equipment will be required at all times when on site. The following is a breakdown of the types of protective clothing and equipment to be used during the site activities.

7.1.1 Levels of Protection

The Site Health and Safety Officer will determine whether a level of protection should be upgraded or downgraded. Changes in the level of protection will be recorded in the dedicated site logbook along with the rationale for the changes (see Section 7.1.3 for additional information on PPE upgrades). Level D PPE will be the minimum requirement at all times during the environmental remediation portion of the project.

7.1.2 Level D Personal Protective Equipment

All initial site access and activities will be done in Level D attire. Level D protection is sufficient under conditions where no contaminants are present or those activities that do not pose a potential threat of unexpected inhalation of or contact with hazardous levels of any substances. Typical Level D activities may include sediment, logging and groundwater sampling, and as surficial site surveys.

- Hard hat
- Safety glasses (as appropriate)
- Steel toe and shank boots
- Fluorescent vest
- Hearing protection (as appropriate)

7.1.3 Modified Level D Personal Protective Equipment

- Hard hat
- Safety glasses
- Steel toe and shank boots
- Fluorescent vest
- Nitrile "N-Dex" inner gloves
- Latex outer boots (chemical resistant)
- Polyethylene coated Tyvek suit
- Hearing protection (as appropriate)

7.1.4 Level C Personal Protective Equipment

Level C protection, as described in this plan, will be available at a minimum for those activities that involve surface and subsurface soil (strata disturbance such as well installation, and all subsurface media sampling activities such as split-spoon sampling and borings). Level C protection equipment should be readily available at all times. Consistent with OSHA training, prior to donning Level C, oxygen percent must be continuously monitored.

- Buddy system required at all times
- Full face respirator with NIOSH approved OV/AG/HEPA combination cartridges (MSA GMC-H)
- Saranex coated Tyvek Suit
- Inner Nitrile "N-Dex" gloves
- Outer Nitrile (NBR) gloves
- Steel toe and shank boots
- Outer boots (chemical resistant)
- Hard hat
- Hearing protection (as appropriate)

7.1.5 Level B Personal Protective Equipment

Some activities may require Level B protection. In atmospheres potentially containing toluene and xylenes, the protective ensemble should include chemical resistant clothing since the two compounds have skin absorption potential.

Regional Health and Safety representatives must be on site upon start-up of <u>any</u> project requiring level B protection. This should be understood to include subcontractors conducting Level B activity.

- Buddy system required at all times
- Supplied air respirator or SCBA
- Saranex coated Tyvek Suit
- Inner Nitrile "N-Dex" gloves

- Outer Nitrile (NBR) gloves
- Steel toe and shank boots
- Outer boots (chemical resistant)
- Hard hat
- Hearing protection (as appropriate)

7.1.6 Personal Use Factors and Equipment Change Out Schedule

Prohibitive or precautionary measures should be taken as necessary to prevent workers from jeopardizing safety during equipment use.

If necessary, all respiratory protective equipment used will be approved by NIOSH/MSHA. Respirator cartridges will be changed once per eight-hour shift at a minimum. This can be accomplished at the end of the workday during respirator decontamination. Employees working within the excavation front should change the cartridge of their respirators once every four hours. If odor breakthrough is detected while wearing the respirator or if breathing becomes difficult, change cartridges immediately. A filter change out schedule is provided below.

Remedial Worker	Work Area	Filter Type	Replacement Rate
Site Screener	EZ – At Excavation Front	MSA GMC-H	Every 4 Hours
Laborer	EZ – At Excavation Front	MSA GMC-H	Every 2 Hours
	SZ, CRZ	MSA GMC-H	Every 8 Hours
Equipment Operator	EZ	MSA GMC-H	Every 4 Hours
	SZ, CRZ	MSA GMC-H	Every 8 Hours
Administrator	EZ	MSA GMC-H	Every 4 Hours
	SZ, CRZ	MSA GMC-H	Every 8 Hours

^{*}Work Area Definitions are discussed in the following Section (8.1)

When utilizing protective garments such as Tyvek suits, gloves, and booties, all seams between protective items will be sealed with duct tape.

Contact with contaminated surfaces, or surfaces suspected of being contaminated, should be avoided. This includes walking through, kneeling in, or placing equipment in puddles, mud, discolored surfaces, or on drums and other containers.

Eating, smoking, drinking, and/or the application of cosmetics in the immediate work area is prohibited. Ingestion of contaminants or absorption of contaminants into the skin may occur.

The use of contact lenses on the job site is strongly advised against. Contact lenses may trap contaminants and/or particulate between the lens and eye, causing irritation. However, when glasses are not available, contact lenses are preferred over faulty vision. When contact lenses are worn, safety glasses and/or goggles must be worn at all times while on the job site. Wearing contact lenses with a respirator in a contaminated atmosphere is prohibited under 29 CFR ss1910.134 (e)(5)(iii).

8 Work Zones

8.1 Work Zone Definitions

Work and support areas shall be established based on ambient air data and proposed work sites. They shall be established in order to contain contamination within the smallest areas possible and shall ensure that each employee has the proper PPE for the area or zone in which work is to be performed.

8.1.1 Exclusion Zone (EZ)

It is within this zone that the excavation or environmental remediation activities such as tank abandonment, system installation or other soil disturbance operations are performed. No one shall enter this zone unless the appropriate PPE is donned. The location of this zone will change as the construction-related excavation activities are performed.

8.1.2 Contaminant Reduction Zone (CRZ)

It is within this zone that the decontamination process is undertaken. Personnel and their equipment must be adequately decontaminated before leaving this zone for the support zone. This zone will be set up between the EZ (no less than 100 feet away) and the site boundary.

8.1.3 Support Zone (SZ)

The support zone is considered to be uncontaminated; as such, protective clothing and equipment are not required but should be available for use in emergencies. All equipment and materials are stored and maintained within this zone. Protective clothing is put on within the SZ before entering the EZ or the CRZ. The SZ will be established in a safe environment at least 50 feet away from the EZ.

9 General Safety and Health Provisions

This Section is not, nor does it purport to be, a comprehensive recitation of safety and health requirements applicable to general safety and health provisions. Rather, contractors, subcontractors and workers at the site must refer to OSHA's General Safety and Health Provision Standard, set forth at 29 C.F.R. § 1910 subparts C and G as well as all supporting OSHA Compliance Directives and Letters of Interpretation, for complete information on safety and health compliance obligations.

9.1 Safety Practices / Standing Orders

The following are important safety precautions that will be enforced during work activities.

- 1. Eating, drinking, chewing gum or tobacco, smoking, or any practice that increases the probability of hand-to-mouth transfer and ingestion of material is prohibited in any area designated as contaminated.
- 2. Hands and face must be thoroughly washed upon leaving the work area and before eating, drinking, or any other activity.
- 3. Whenever decontamination procedures for outer garments are in effect, the entire body should be thoroughly washed as soon as possible after the protective garments are removed.
- 4. No excessive facial hair that interferes with the effectiveness of a respirator will be permitted on personnel required to wear respiratory protection equipment. The respirator must seal against the face so that the wearer receives air only through the air purifying cartridges attached to the respirator. Fit testing shall be performed prior to respirator use to ensure the wearer obtains a proper seal.
- 5. Contact with potentially contaminated surfaces should be avoided whenever possible. One should not walk through puddles; kneel on the ground; lean, sit, or place equipment on drums, containers, vehicles, or the ground.
- 6. Medicine and alcohol can potentate the effect from exposure to certain compounds. Prescribed drugs and alcoholic beverages should not be consumed by personnel involved in the project.
- 7. Personnel and equipment in the work areas should be minimized, consistent with effective site operations.
- 8. Work areas for various operational activities should be established.
- 9. Procedures for leaving the work area must be planned and implemented prior to going to the site. Work areas and decontamination procedures must be established on the basis of prevailing site conditions.
- 10. Respirators will be issued for the exclusive use of one worker and will be cleaned and disinfected after each use.
- 11. Safety gloves and boots shall be taped to the disposable, chemical-protective suits as necessary.
- 12. All unsafe equipment left unattended will be identified by a "DANGER, DO NOT OPERATE" tag.
- 13. Noise mufflers or earplugs may be required for all site personnel working around heavy equipment. This requirement will be at the discretion of the Site Health and Safety Officer. Disposable, form-fitting plugs are preferred.

14. Cartridges for air-purifying respirators in use will be changed daily at a minimum.

9.2 Buddy System

Site personnel will employ the buddy system when working under certain circumstances, such as enclosed spacing.

Under the buddy system, each site worker is responsible for monitoring the well-being of another worker. No one will work alone when the buddy system is implemented. At no time will fewer than two employees be present at the site if activities are underway.

9.3 Site Communications Plan

Mobile telephone and/or two-way radios will be used to communicate between the work parties on the site. The following standard hand signals will be used in case of failure of radio communication:

Hands on top of head = Need assistance

Thumbs up = OK, I am alright, I understand

■ Thumbs down = No, negative

Personnel in the Contaminated Zone should remain in constant radio communication or within sight of the project team leader. Any failure of radio communication will require the team leader to evaluate whether personnel should leave the zone.

9.4 Retention of Records

The following records will be maintained on-site and in corporate records for no less than three years.

- · Fit test results
- OSHA Training Certification
- Medical Questionnaire and/or Medical Clearance
- Medical Data Sheets
- Accident Report Forms

10 Decontamination Plan

10.1 General

Personnel involved in work activities at the site may be exposed to compounds in a number of ways, despite the most stringent protective procedures. Site personnel may come in contact with vapors, gases, mists, particulates in the air, or other site media while performing site duties. Use of monitoring instruments and site equipment can also result in exposure and transmittal of hazardous substances.

In general, decontamination involves scrubbing with a detergent water solution followed by clean water rinses. All disposable items shall be disposed of in a dry container. Certain parts of contaminated respirators, such as harness assemblies and leather or cloth components, are difficult to decontaminate. If grossly contaminated, they may have to be discarded. Rubber components can be soaked in detergent and water and scrubbed with a brush. In addition to being contaminated, all respirators, non-disposable protective clothing, and other personal articles must be sanitized or replaced before they can be used again if they become soiled from exhalation, body oils, and perspiration. The manufacturer's instructions should be followed in sanitizing the respirator masks. The Site Health and Safety Officer will be responsible for the proper maintenance, decontamination, and sanitizing of any respirator equipment that may be used on-site. The decontamination zone layout and procedures should match the prescribed levels of personal protection.

The following procedures have been established to provide site personnel with minimum guidelines for proper decontamination. Personnel leaving the point of operations designated as the EZ must follow these minimum procedures. The decontamination process shall take place within the contaminant reduction zone.

10.2 Minimum Decontamination Procedure

Personnel leaving the point of operations should remove or change outer gloves. At a minimum, boots shall be cleaned of all accumulated soil/fill. Outer boots must be properly washed where gross contamination is evident or disposed of. If Tyvek suits are being utilized, they should be removed or changed. Personnel should remove the Tyvek suits so that the inner clothing does not come in contact with any contaminated surfaces. After Tyvek removal, personnel shall remove and discard outer Nitrile gloves. Personnel shall then remove the respirator, where applicable. Respirators shall be disinfected between uses with towelettes or other sanitary methods. Potable water, at a minimum, will be present so that site personnel can thoroughly wash hands and face after leaving the point of operations.

The Site Health and Safety Officer will monitor decontamination procedures to ensure their effectiveness. Modifications of the decontamination procedure may be necessary as determined by the Site Health and Safety Officer's observations.

10.3 Standard Decontamination Procedure

The following decontamination procedures should be implemented during site operations for the appropriate level of protection.

10.3.1 Level B

Segregated equipment	Deposit equipment (tools, sampling devices, notes, monitoring instruments,
drop	radios, etc.) used on the site onto plastic drop cloths.
•	
Boot covers and glove	Outer boots and outer gloves should be scrubbed with a decontamination
wash	solution of detergent and water or replaced.
Rinse off boot covers and	Decontamination solution should be rinsed off boot covers and gloves using
gloves	generous amounts of water. Repeat as many times as necessary.
Tape removal	Remove tape from around boots and gloves and place into container with plastic liner.
Boot cover removal	Remove disposable boot covers and place into container with plastic liner.
Outer glove removal	Remove outer gloves and deposit in container with plastic liner.
Suit / safety boot wash	Completely wash splash suit, SCBA, gloves, and safety boots. Care should be
	exercised that no water is allowed into the SCBA regulator. It is suggested
	that the SCBA regulator be wrapped in plastic.
Suit / safety boot rinse	Thoroughly rinse off all decontamination solution from protective clothing.
Tank or canister changes	This is the last step in the decontamination procedure for those workers
	wishing to change air tanks and return to the EZ. The worker's air tank or
	cartridge is exchanged, new outer glove and boot covers are donned, and
	joints taped.
Removal of safety boots	Remove safety boots and deposit in container with a plastic liner.
SCBA backpack removal	Without removing the face piece, the SCBA backpack should be removed and
	placed on a table. The face piece should then be disconnected from the
	remaining SCBA unit and then proceed to the next station.
Splash suit removal	With care, remove the splash suit. The exterior of the splash suit should not
	come in contact with any inner layers of clothing.
Inner glove wash	The inner gloves should be washed with a mild decontamination solution
	(detergent / water).
Inner glove rinse	Generously rinse the inner gloves with water.
Face piece removal	Without touching the face with gloves, remove the face piece. The face piece
	should be deposited into a container that has a plastic liner.
Inner glove removal	Remove the inner glove and deposit into a container that has a plastic liner.
Field wash	Wash hands and face thoroughly. If highly toxic, skin corrosive, or skin
	absorbent materials are known or suspected to be present, a shower should
	be taken.

10.3.2 Level C and Level D

The decontamination procedure for Level C and Level D will be satisfied with the Minimum procedures outlined in section 8.2.

10.4 Heavy Equipment and Handling Equipment Decontamination

Equipment traversing the site and exiting the site will be subjected to a decontamination protocol. At a minimum the protocol will consist of an inspection of the truck fenders, tires and mud flaps for accumulated soil/fill, and removal of all accumulations using hand tools (brush, broom and scrapers). If deemed necessary by the Health and Safety Officer,

this inspection will be performed over a thirty by fifteen-foot area that has been filled with ¾ inch crushed recycled concrete aggregate to facilitate the removal of soil/fill accumulations from the tires, and to immobilize soil/fill removed from the truck body. Additionally, all trucks hauling waste will be required to be covered prior to exiting the site.

At the conclusion of the use of each piece of excavation equipment on the site, it will be decontaminated with an Alconox / water solution followed by a clean water rinse within the Contaminant Reduction Zone. The rinsate will be allowed to charge into the site ground.

11 Emergency Response / Contingency Plan

11.1 Pre-Emergency Planning

In order to properly prepare for emergencies, Safety Data Sheets (SDS) will be maintained on-site for the type of contaminants to which workers may be exposed. Based upon the results of previous investigations, The COCs for the Site are

<u>Soil</u>: benzene, toluene, ethylbenzene, total xylenes, n-propylbenzene, 1,3,5-trimethylbenzene, 1,2,4-trimethylbenzene, benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, chrysene, dibenzo(a,h)anthracene, and indeno(1,2,3-cd)pyrene, fluoranthene, naphthalene, dibenzofuran, 2-methylphenol, 3-methylphenol/4-methylphenol, arsenic, barium, copper, lead, mercury, nickel and zinc.

<u>Groundwater</u>: benzene, isopropylbenzene, n-propylbenzene and 1,2,4,5-tetramethylbenzene, Arsenic (total), barium (total), chromium (total), iron (total), lead (total), magnesium (total), manganese (total), nickel (total), sodium (total) and thallium (total).

Soil Vapor: TCE.

The MSDS are provided in **Appendix D**.

In the event a suspected or known hazardous substance or substance container is encountered during site activities, a contingency plan will be triggered (see Section 11.3).

11.2 Emergency Contact Information

In the event of an accident or emergency situation, emergency procedures will be executed. Said procedures can and will be executed by the first person to observe an accident or emergency situation. The Project Field Manager will be notified about the situation immediately after emergency procedures are implemented.

11.2.1 Emergency Contacts


Emergency:	911	
Hospital:	(718) 780-3000	New York Presbyterian Brooklyn-
		Methodist hospital
Police:	911	NYPD
Fire Department:	911	NYFD
Chemtrec:	800-424-9300	
NYC Poison Control Center:	212-764-7667	

National Response Center:	800-424-8802	
US EPA (24-hour hotline):	800-424-9346	

Start: 585 Union Street, Brooklyn, NY 11215

- Head southeast on Union Street toward 3rd Avenue 92 feet
- Turn right at the 1st cross street onto 3rd Avenue 0.5 mi
- Turn left onto 7th Street 0.7 mi
- Turn left onto 8th Avenue 259 ft
- Turn left at the 1st cross street onto 6th Street 469 ft

End: New York Presbyterian Brooklyn Methodist Hospital – 506 6th Street, Brooklyn, NY 11215

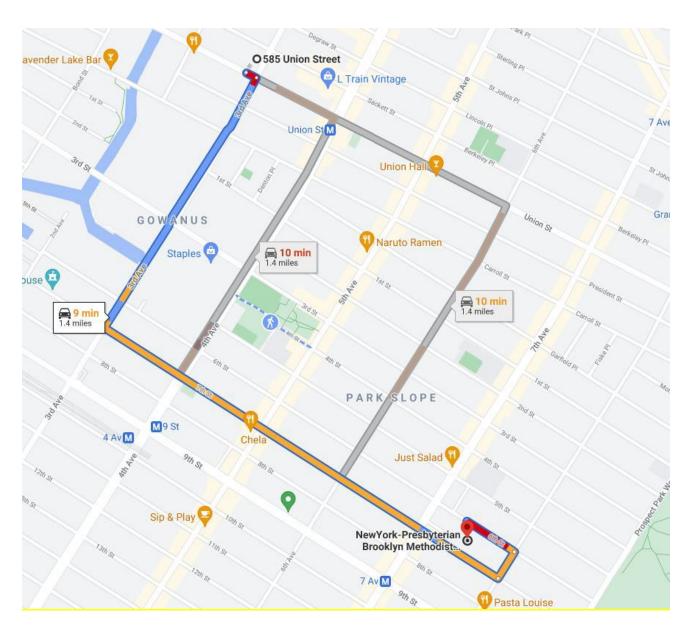

11.2.2 Utility Emergencies / Initiating Subsurface Investigation Work

Where necessary, utility markouts will be called in via the one call center or to the individual entities listed below.

Mark Out One-Call Center (811)	1-800-272-4480	No-Cuts
Gas Company:	718-643-4050	Con Edison
Telephone Company:	516-661-6000	Verizon
Electric Company:	718-643-4050	Con Edison

11.3 Contingency / Evacuation Plan

This Section is not, nor does it purport to be, a comprehensive recitation of safety and health requirements applicable to emergency procedures. Rather, contractors, subcontractors and workers at the site must refer to OSHA's Employee Emergency Action Plan Standard, set forth at 29 C.F.R. § 1910 Part 1926.35(a), as well as all supporting OSHA Compliance Directives and Letters of Interpretation, for complete information on safety and health compliance obligations.

If an unknown substance or substance container is encountered during site activities, the following contingency plan will be triggered.

- 1. The Site Health and Safety Officer, Project Manager and Field Operations Leader will be notified and an Exclusion Zone (the aerial extent of which will be determined by the above safety staff) will be established.
- 2. All staff will be evacuated from the Exclusion Zone.
- 3. Air monitoring will be conducted down-wind of the Exclusion Zone.
- 4. The NYSDEC, as well as any other Government regulatory agency whose need may be prompted by the particular situation, will be notified.
- 5. Upon arrival of the NYSDEC or Government regulatory agency representative(s), site control will transfer to the appropriate Government personnel.

It may be possible that a situation could develop site emergency could necessitate the evacuation of all personnel from the site. If such a situation develops, an audible alarm shall be given for site evacuation (consisting of an air horn). Personnel shall evacuate the site in a calm and controlled fashion and regroup at a predetermined location. The route of evacuation will be dependent on wind direction, severity, type of incident, etc. The site must not be re-entered until back-up help, monitoring equipment, and/or personal protective equipment are on hand and the appropriate regulatory agencies have been notified.

11.4 Emergency Medical Treatment Procedures

This Section is not, nor does it purport to be, a comprehensive recitation of safety and health requirements applicable to medical treatment and first aid. Rather, contractors, subcontractors and workers at the site must refer to OSHA's Medical Services and First Aid Standard, set forth at 29 C.F.R. § 1910 Part 1926.23 and 1926.50, as well as all supporting OSHA

Compliance Directives and Letters of Interpretation, for complete information on safety and health compliance obligations.

All injuries, no matter how slight, will be reported to the site safety supervisor immediately. The safety supervisor will complete an accident report for all incidents (**Appendix E**).

Some injuries, such as severe lacerations or burns, may require immediate treatment. Unless required due to immediate danger, seriously injured persons should not be moved without direction from attending medical personnel.

11.4.1 Standard Procedures for Injury

- 1. Notify the Site Health and Safety Officer, Project Manager, and the NYCDEP and NYCDHPD of all accidents, incidents, and near emergency situations.
- 2. If the injury is minor, trained personnel should proceed to administer appropriate first aid.
- 3. Telephone for ambulance/medical assistance if necessary. Whenever possible, notify the receiving hospital of the nature of physical injury or chemical overexposure. If no phone is available, transport the person to the nearest hospital. Refer to the map in section 11.2.1.
- 4. When transporting an injured person to a hospital, bring this Health and Safety Plan with the attached MSDS to assist medical personnel with diagnosis and treatment.

11.4.2 Chemical Overexposure

In all cases of chemical overexposure, follow standard procedures as outlined below for poison management, first aid, and, if applicable, cardiopulmonary resuscitation. Different routes of exposure and their respective first aid/poison management procedures are outlined below.

Ingestion	Do not induce vomiting unless prompted by a health professional. Transport
	person to nearest hospital immediately.
Inhalation / Confined	Do not enter a confined space to rescue someone who has been overcome
Space	unless properly equipped and a standby person present.
Inhalation / Other	Move the person from the contaminated environment. Initiate CPR if
	necessary. Call or have someone call for medical assistance. Refer to MSDS
	for additional specific information. If necessary, transport the victim to the
	nearest hospital as soon as possible.
Skin Contact / Non-	Wash off skin with a large amount of water immediately. Remove any
Caustic Contaminant (Petroleum, Gasoline,	affected clothing and rewash skin using soap, if available. Transport person
etc.)	to a medical facility if necessary.

Skin Contact / Corrosive Contaminant (Acids, Hydrogen Peroxide, etc.)	Wash off skin with a large amount of water immediately. Remove any affected clothing and rewash skin with water. Transport person to a medical facility if necessary.
Eyes	Hold eyelids open and rinse the eyes immediately with large amounts of water for 15 minutes. Never permit the eyes to be rubbed. Transport person to a medical facility as soon as possible.

11.4.3 First Aid for Injuries Incurred During Field Work

A first aid kit and an emergency eyewash will be available on-site. Field crews, when performing field operations, will carry portable first aid kits that include emergency eye wash stations.

11.4.4 First Aid Equipment List

The first aid kit(s) kept at the site will consist of a weatherproof container with individually sealed packages for each type of item.

The kit will include at least the following items:

- Gauze roller bandages, 1-inch and 2-inch
- Gauze compress bandages, 4-inch
- Gauze pads, 2-inch
- Adhesive tape, 1-inch
- Bandage, 1-inch
- Butterfly bandages
- Triangular bandages, 40-inch
- Ampules of ammonia inhalants
- Antiseptic applicators or swabs
- Burn dressing and sterilized towels
- Surgical scissors
- Eye dressing
- Portable emergency eye wash
- Emergency oxygen supply
- Alcohol
- Hydrogen peroxide
- Clinical grade thermometer
- Tourniquet

11.4.5 Other Emergency Equipment

One portable fire extinguisher with a rating (ratio) of 20 pound A/B/C and one portable fire extinguisher with a rating of 2A will be conspicuously and centrally located between the restricted and non-restricted zones. In addition, similar extinguishers of the same size and class will be located in the site office trailer so that maximum travel distance to the nearest unit shall not exceed 50 feet. Portable extinguishers will be properly tagged with inspection dates and maintained in accordance with standard maintenance procedures for portable fire extinguishers. Field personnel will be trained in fire extinguisher use before field operations begin.

An emergency at any part of the site, such as fire or chemical release, might require that some appropriately trained site workers direct traffic on or near the site.

The following safety equipment to be used for traffic should be kept readily available on site in the field office:

- reflective/fluorescent vests
- flares
- traffic cones (and flags, or the equivalent, as needed)
- hazard tape (barricades as needed)
- working flashlights

11.5 Record of Injuries Incurred On-Site

11.5.1 Occupational Injuries and Illnesses Form (OSHA 200)

All occupational injuries and illnesses that are required to be recorded under the Occupational Safety and Health Act will be registered on OSHA Form 200 (see **Appendix C**). The site safety supervisor will record occupational injuries and illnesses within 48 hours of occurrence, as required by statute.

11.5.2 Employer's First Report of Injury

The site safety supervisor for all accidents involving work injury at the site will complete this form (**Appendix E**). Follow-up procedures will include investigation of each accident or near-miss by the safety supervisor to assure that no similar accidents occur in the future.

Appendix A:

Acknowledgment Statement

DATE	EMPLOYEE NAME	SAFETY OFFICER/SUPERVISOR	ACKNOLEDGEMENT THAT YOU HAVE READ AND UNDERSTSAND THE HASP SUPPLEMENT – TARGET SAFETY TOPIC FOR CONSTRUCTION PERSONNEL
200.50			

Appendix B:

OSHA Respirator Medical Evaluation Questionnaire

Attachment 4

$\label{lem:condition} \begin{tabular}{ll} Appendix C to 1910.134:OSHA Respirator Medical Evaluation Questionnaire (Mandatory) \end{tabular}$

To the employer: Answers to questions in Section 1, and to question 9 in Section 2 of Part A, do not require a medical examination.

To the employee:
Can you read (circle one): Yes No
Your employer must allow you to answer this questionnaire during normal working hours, or at a time and
place
that is convenient to you. To maintain your confidentiality, your employer or supervisor must not look at or
review your answers, and your employer must tell you how to deliver or send this questionnaire to the
health
care professional who will review it.
Part A. Section 1. (Mandatory) The following information must be provided by every employee who has
been
selected to use any type of respirator (please print).
1. Today's date:
2. Your name:
3. Your age (to nearest year):
4. Sex (circle one): Male Female
5. Your height: ft in. 6. Your weight: lbs.
6. Your weight: lbs.
7. Your job title:
8. A phone number where you can be reached by the health care professional who reviews this
questionnaire
(include the Area Code):
(include the Area Code): 9. The best time to phone you at this number:
10. Has your employer told you how to contact the health care professional who will review this
questionnaire
(circle one):
11. Check the type of respirator you will use (you can check more than one category):
a N, R, or P disposable respirator (filter-mask, non-cartridge type only).
b Other type (for example, half- or full-facepiece type, powered-air purifying, supplied-air, self-
contained
breathing apparatus).
12. Have you worn a respirator (circle one):
No
If "yes," what
type(s):

Part A. Section 2. (Mandatory) Questions 1 through 9 below must be answered by every has been	employee who
selected to use any type of respirator (please circle "yes" or "no").	
1. Do you currently smoke tobacco, or have you smoked tobacco in the last month:	Yes
No	
2. Have you ever had any of the following conditions?	
a. Seizures (fits):	Yes No
b. Diabetes (sugar disease):	
c. Allergic reactions that interfere with your breathing:	Yes No
d. Claustrophobia (fear of closed-in places):	. Yes No
e. Trouble smelling odors (except when you had a cold):	Yes No
3. Have you ever had any of the following pulmonary or lung problems?	
a. Asbestosis:	Yes No
b. Asthma:	Yes No
c. Chronic bronchitis:	
d. Emphysema:	
e. Pneumonia:	
f. Tuberculosis:	
g. Silicosis:	
h. Pneumothorax (collapsed lung):	
i. Lung cancer:	
j. Broken ribs:	
k. Any chest injuries or surgeries:	
l. Any other lung problem that you've been told about:	
4. Do you currently have any of the following symptoms of pulmonary or lung illness?	. 100110
a. Shortness of breath:	Yes No
b. Shortness of breath when walking fast on level ground or walking up a slight hill or incl	
c. Shortness of breath when walking with other people at an ordinary pace on level ground	
d. Have to stop for breath when walking at your own pace on level ground:	
e. Shortness of breath when washing or dressing yourself:	
f. Shortness of breath that interferes with your job:	
g. Coughing that produces phlegm (thick sputum):	
h. Coughing that wakes you early in the morning:	
i. Coughing that occurs mostly when you are lying down:	
j. Coughing up blood in the last month:	
k. Wheezing:	
1. Wheezing that interferes with your job:	Ves No
m. Chest pain when you breathe deeply:	
n. Any other symptoms that you think may be related to lung problems:	Vec No
5. Have you ever had any of the following cardiovascular or heart problems?	1 65 110
a. Heart attack:	Vac Na
b. Stroke:	
c. Angina:	
d. Heart failure:	
e. Swelling in your legs or feet (not caused by walking):	
f. Heart arrhythmia (heart beating irregularly):	
g. High blood pressure:	
h. Any other heart problem that you've been told about:	. Yes No

6. Have you ever had any of the following cardiovascular or heart symptoms?	
a. Frequent pain or tightness in your chest:	
b. Pain or tightness in your chest during physical activity:	Yes No
c. Pain or tightness in your chest that interferes with your job:	
d. In the past two years, have you noticed your heart skipping or missing a beat:	
e. Heartburn or indigestion that is not related to eating:	
f. Any other symptoms that you think may be related to heart or circulation problem 7. Do you currently take medication for any of the following problems?	ns: Yes No
a. Breathing or lung problems:	Yes No
b. Heart trouble:	
c. Blood pressure:	
d. Seizures (fits):	
8. Has your wearing a respirator caused any of the following problems? (If you've r	
respirator, check the following space and go to question 9:)	iever used a
a. Eye irritation:	Yes No
b. Skin allergies or rashes:	
c. Anxiety that occurs only when you use the respirator:	
d. Unusual weakness or fatigue:	
e. Any other problem that interferes with your use of a respirator:	
9. Would you like to talk to the health care professional who will review this questi	
answers	omane about your
to this questionnaire:	Vac Na
www.io	1 es no
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been	elected to use either a employees who have
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No	elected to use either a employees who have
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For elected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No 11. Do you currently have any of the following vision problems?	elected to use either a employees who have yYes
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have yYes
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No 11. Do you currently have any of the following vision problems? a. Wear contact lenses:	elected to use either a employees who have 'yYesYes NoYes No
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have 'y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For expectation been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No 11. Do you currently have any of the following vision problems? a. Wear contact lenses:	elected to use either a employees who have Ty. Yes Yes Yes No Yes No Yes No Yes No Yes No
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For expectation been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have Ty. Yes Yes Yes No Yes No Yes No Yes No Yes No
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For expectation been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No 11. Do you currently have any of the following vision problems? a. Wear contact lenses:	elected to use either a employees who have Ty. Yes Yes Yes No Yes No Yes No Yes No Yes No
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have Ty. Yes Yes Yes No Yes No Yes No Yes No Yes No
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For a been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For elementary been selected to use other types of respirators, answering these questions is voluntary 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No 11. Do you currently have any of the following vision problems? a. Wear contact lenses:	elected to use either a employees who have y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have Ty. Yes Yes Yes Yes No Yes No
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently):	elected to use either a employees who have Ty. Yes Yes Yes Yes No
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No 11. Do you currently have any of the following vision problems? a. Wear contact lenses: b. Wear glasses: c. Color blind: d. Any other eye or vision problem: 12. Have you ever had an injury to your ears, including a broken ear drum: No 13. Do you currently have any of the following hearing problems? a. Difficulty hearing: b. Wear a hearing aid: c. Any other hearing or ear problem: 14. Have you ever had a back injury: 15. Do you currently have any of the following musculoskeletal problems? a. Weakness in any of your arms, hands, legs, or feet: b. Back pain: c. Difficulty fully moving your arms and legs:	elected to use either a employees who have y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No 11. Do you currently have any of the following vision problems? a. Wear contact lenses: b. Wear glasses: c. Color blind: d. Any other eye or vision problem: 12. Have you ever had an injury to your ears, including a broken ear drum: No 13. Do you currently have any of the following hearing problems? a. Difficulty hearing: b. Wear a hearing aid: c. Any other hearing or ear problem: 14. Have you ever had a back injury: 15. Do you currently have any of the following musculoskeletal problems? a. Weakness in any of your arms, hands, legs, or feet: b. Back pain: c. Difficulty fully moving your arms and legs: d. Pain or stiffness when you lean forward or backward at the waist:	elected to use either a employees who have y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No 11. Do you currently have any of the following vision problems? a. Wear contact lenses: b. Wear glasses: c. Color blind: d. Any other eye or vision problem: 12. Have you ever had an injury to your ears, including a broken ear drum: No 13. Do you currently have any of the following hearing problems? a. Difficulty hearing: b. Wear a hearing aid: c. Any other hearing or ear problem: 14. Have you ever had a back injury: 15. Do you currently have any of the following musculoskeletal problems? a. Weakness in any of your arms, hands, legs, or feet: b. Back pain: c. Difficulty fully moving your arms and legs: d. Pain or stiffness when you lean forward or backward at the waist: e. Difficulty fully moving your head up or down:	elected to use either a employees who have y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No 11. Do you currently have any of the following vision problems? a. Wear contact lenses: b. Wear glasses: c. Color blind: d. Any other eye or vision problem: 12. Have you ever had an injury to your ears, including a broken ear drum: No 13. Do you currently have any of the following hearing problems? a. Difficulty hearing: b. Wear a hearing aid: c. Any other hearing or ear problem: 14. Have you ever had a back injury: 15. Do you currently have any of the following musculoskeletal problems? a. Weakness in any of your arms, hands, legs, or feet: b. Back pain: c. Difficulty fully moving your arms and legs: d. Pain or stiffness when you lean forward or backward at the waist: e. Difficulty fully moving your head up or down: f. Difficulty fully moving your head side to side:	elected to use either a employees who have y
Questions 10 to 15 below must be answered by every employee who has been so full-facepiece respirator or a self-contained breathing apparatus (SCBA). For been selected to use other types of respirators, answering these questions is voluntar 10. Have you ever lost vision in either eye (temporarily or permanently): No 11. Do you currently have any of the following vision problems? a. Wear contact lenses: b. Wear glasses: c. Color blind: d. Any other eye or vision problem: 12. Have you ever had an injury to your ears, including a broken ear drum: No 13. Do you currently have any of the following hearing problems? a. Difficulty hearing: b. Wear a hearing aid: c. Any other hearing or ear problem: 14. Have you ever had a back injury: 15. Do you currently have any of the following musculoskeletal problems? a. Weakness in any of your arms, hands, legs, or feet: b. Back pain: c. Difficulty fully moving your arms and legs: d. Pain or stiffness when you lean forward or backward at the waist: e. Difficulty fully moving your head up or down:	elected to use either a employees who have y

i. Difficulty climbing a flight of stairs or a ladder carrying more than 25 lbs: Yes No j. Any other muscle or skeletal problem that interferes with using a respirator: Yes No Part B Any of the following questions, and other questions not listed, may be added to the
questionnaire at
the discretion of the health care professional who will review the questionnaire. 1. In your present job, are you working at high altitudes (over 5,000 feet) or in a place that has lower than
normal
amounts of oxygen: Yes No If "yes," do you have feelings of dizziness, shortness of breath, pounding in your chest, or other symptoms when you're working under these conditions: Yes
No 2. At work or at home, have you ever been exposed to hazardous solvents, hazardous airborne chemicals
(e.g.,
gases, fumes, or dust), or have you come into skin contact with hazardous chemicals: Yes No
If "yes," name the chemicals if you know them:
3. Have you ever worked with any of the materials, or under any of the conditions, listed below:
a. Asbestos: Yes No b. Silica (e.g., in sandblasting): Yes No c. Tungsten/cobalt (e.g., grinding or welding this material): Yes No d. Beryllium: Yes No
e. Aluminum: Yes No f. Coal (for example, mining): Yes No
g. Iron: Yes No
h. Tin: Yes No
i. Dusty environments: Yes No
j. Any other hazardous exposures: Yes No
If "yes," describe these
exposures:

4. List any second jobs or side businesses you have:
have:
5. List your previous occupations:
6. List your current and previous hobbies:
7. Have you been in the military services? Yes No If "yes," were you exposed to biological or chemical agents (either in training or combat): Yes No 8. Have you ever worked on a HAZMAT team?
No

hem:	
hem:	
n. HEPA Filters:	
o. Canisters (for example, gas masks):	Yes No
c. Cartridges:	. Yes No
1. How often are you expected to use the respirator(s) (circle "yes" or "no" for all answer	ers that apply to
/ou)?:	
a. Escape only (no rescue):	Yes No
b. Emergency rescue only:	Yes No
c. Less than 5 hours per week:	Yes No
d. Less than 2 hours per day:	
e. 2 to 4 hours per day:	
Cover 4 hours per day:	
2. During the period you are using the respirator(s), is your work effort:	
a. Light (less than 200 kcal per hour):	. Yes No
f "yes," how long does this period last during the average shift:hrs	
Examples of a light work effort are sitting while writing, typing, drafting, or performing	light assembly
vork; or	c ,
standing while operating a drill press (1-3 lbs.) or controlling machines.	
o. Moderate (200 to 350 kcal per hour):	Yes No
f "yes," how long does this period last during the average shift:hrs	mins.
Examples of moderate work effort are sitting while nailing or filing; driving a truck or but	us in urban traffic:
standing while drilling, nailing, performing assembly work, or transferring a moderate lo	
it	(accur 20 105.)
runk level; walking on a level surface about 2 mph or down a 5-degree grade about 3 m	oh: or pushing a
wheelbarrow with a heavy load (about 100 lbs.) on a level surface.	yn, or pushing w
2. Heavy (above 350 kcal per hour):	Yes No
f "yes," how long does this period last during the average shift:hrs	mins.
Examples of heavy work are lifting a heavy load (about 50 lbs.) from the floor to your w	aist or shoulder
working	dist of shoulder,
on a loading dock; shoveling; standing while bricklaying or chipping castings; walking u	n an 8-degree
grade	ip an o degree
about 2 mph; climbing stairs with a heavy load (about 50 lbs.).	
13. Will you be wearing protective clothing and or equipment (other than the respirator)	when vou're using
	when you're using
/our	Vac Ma
	1 es 100
respirator:	
f "yes," describe this protective clothing and or equipment:	

16. Describe the work you'll be doing while you're using your respirator(s):
17. Describe any special or hazardous conditions you might encounter when you're using your respirator(s) (for
example, confined spaces, life-threatening gases):
18. Provide the following information, if you know it, for each toxic substance that you'll be exposed to when
you're using your respirator(s):
Name of the first toxic substance:
Name of the first toxic substance: Estimated maximum exposure level per shift:
Duration of exposure per shift
Name of the second toxic substance:
Estimated maximum exposure level per shift:
Duration of exposure per shift:
Name of the third toxic substance:
Estimated maximum exposure level per shift:
Duration of exposure per shift:
Duration of exposure per shift: The name of any other toxic substances that you'll be exposed to while using your respirator:
19. Describe any special responsibilities you'll have while using your respirator(s) that may affect the safety and
well-being of others (for example, rescue, security):

Apéndice C: Cuestionario de Evaluación Médico obligado por la OSHA (La agencia de seguridad y salud ocupacional)

Parte 29 CFR 1910.134 Mandatorio para Proteccion del Sistema Respiratorio

Marque con un circulo para indicar sus respuestas a cada pregunta.

Para el empleado: Puede usted leer (circule uno): Sí o No

Su patrón debe dejarlo responder estas preguntas durante horas de trabajo o en un tiempo y lugar que sea conveniente para usted. Para mantener este cuestionario confidencial, su patrón o supervisor no debe ver o revisar sus respuestas. Su patrón debe informarle a quien dar o enviar este cuestionario para ser revisado

por un
profesional de sanidad con licencia autorizado por el estado.
Parte A. Sección 1. (Mandatorio). La siguiente información debe de ser proveida por cada empleado que
ha
sido seleccionado para usar cualquier tipo de respirador (escriba claro por favor).
1. Fecha:
2. Nombre:
3. Edad: 4. Su sexo (circule uno) Masculino o Femenino
4. Su sexo (circule uno) Masculino o Femenino
5. Altura:piespulgadas
6. Peso:libras
7. Su ocupación, título o tipo de trabajo:
8. Número de teléfono al donde pueda ser llamado por un profesional de sanidad con licencia que
revisara este cuestionario (incluya el área):
9. Indique la hora mas conveniente para llamarle a este numero:
10. ¿Le ha informado su patrón como comunicarse con el profesional de sanidad con licencia que va a
revisar
este cuestionario (circule una respuesta)?
No
11. Anote el tipo de equipo protector respíratorio que va utilizar (puede anotar mas de una categoría)
a Respirador disponible de clase N, R, o P (por ejemplo: respirador de filtro mécanico, respirado
sin
cartucho)
b Otros tipos (respirador con cartucho químico, máscara con cartucho químico, máscara con
manguera con soplador (PAPR), máscara con manguera sin soplador (SAR), aparato respiratorio autónomo
(SCBA)).
12. ¿Ha usado algun tipo de respirador?
No
Si ha usado equipo protector respíratorio, que tipo(s) ha utilizado:

Parte A. Seccion 2. (Mandatorio): Preguntas del 1 al 9 deben ser contestadas por cad	a empleado que fue
seleccionado a usar cualquier tipo de respirador. Marque con un circulo para indicar su	is repuestas.
1. ¿Corrientemente fuma tabaco, o ha fumado tabaco durante el ultimo mes?	Sí o
No	
2. ¿Ha tenido algunas de las siguientes condiciones medicas?	
a. Convulsiones:	Sí o No
b. Diabetes (azucar en la sangre):	
c. Reacciones alergicas que no lo deja respirar:	
d. Claustrofobia (miedo de estar en espacios cerrados):	
e. Dificultad oliendo excepto cuando ha cogido un resfriado:	
3. ¿Ha tenido algunas de los siguientes problemas pulmonares?	
a. Asbestosis:	Sí o No
b. Asma:	
c. Bronquitis cronica:	
d. Emfisema:	
e. Pulmonía:	
f. Tuberculosis:	
g. Silicosis:	
h. Neumotorax (pulmon colapsado):	
i. Cáncer en los pulmones:	
j. Costillas quebradas:	
k. Injuria o cirujía en el pecho: l. Algun otro problema de los pulmones que le ha dicho su medico:	
4. ¿Corrientemente tiene alguno de los siguientes síntomas o enfermedades en sus puls	
a. Respiración dificultosa	
- D. Kespiración dificultosa cuando camina fabido sobre terreno biano o subtendo una co	lina, Cí a Na
c. Respiración dificultosa cuando camina normalmente con otras personas sobre terren	o plano: Sí o No
c. Respiración dificultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello?	o plano: Sí o No Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo:	o plano: Sí o No Sí o No Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo:	o plano: Sí o No Sí o No Sí o No Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo:	o plano: Sí o No Sí o No Sí o No Sí o No Sí o No
c. Respiración dificultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración dificultosa cuando se esta bañando o vistiendo:	o plano: Sí o No Sí o No Sí o No Sí o No Sí o No Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello?	o plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello?	o plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello?	o plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello?	o plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo:	o plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo: f. Respiración difícultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha difícultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones:	o plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo: f. Respiración difícultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha difícultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón?	o plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo: f. Respiración difícultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha difícultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco:	no plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo: f. Respiración difícultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha difícultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco: b. Ataque cerebrovascular:	no plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo: f. Respiración difícultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha difícultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco: b. Ataque cerebrovascular: c. Dolor en el pecho:	no plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo: f. Respiración difícultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha difícultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco: b. Ataque cerebrovascular: c. Dolor en el pecho: d. Falla de corazón:	no plano: Sí o No
c. Respiración difícultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración difícultosa cuando se esta bañando o vistiendo: f. Respiración difícultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha difícultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco: b. Ataque cerebrovascular: c. Dolor en el pecho: d. Falla de corazón: e. Hinchazón en las piernas o pies (que no sea por caminar):	no plano: Sí o No
c. Respiración dificultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración dificultosa cuando se esta bañando o vistiendo: f. Respiración dificultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha dificultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco: b. Ataque cerebrovascular: c. Dolor en el pecho: d. Falla de corazón: e. Hinchazón en las piernas o pies (que no sea por caminar): f. Latidos irregulares del corazón:	no plano: Sí o No
c. Respiración dificultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración dificultosa cuando se esta bañando o vistiendo: f. Respiración dificultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha dificultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco: b. Ataque cardiaco: b. Ataque cerebrovascular: c. Dolor en el pecho: d. Falla de corazón: e. Hinchazón en las piernas o pies (que no sea por caminar): f. Latidos irregulares del corazón: g. Alta presión:	no plano: Sí o No
c. Respiración dificultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración dificultosa cuando se esta bañando o vistiendo: f. Respiración dificultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha dificultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco: b. Ataque cerebrovascular: c. Dolor en el pecho: d. Falla de corazón: e. Hinchazón en las piernas o pies (que no sea por caminar): f. Latidos irregulares del corazón: g. Alta presión: h. Algun otro problema cardio-vascular o cardiaco:	no plano: Sí o No
c. Respiración dificultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración dificultosa cuando se esta bañando o vistiendo: f. Respiración dificultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha dificultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco: b. Ataque cerebrovascular: c. Dolor en el pecho: d. Falla de corazón: e. Hinchazón en las piernas o pies (que no sea por caminar): f. Latidos irregulares del corazón: g. Alta presión: h. Algun otro problema cardio-vascular o cardiaco: 6. ¿Ha tenido algunos de los siguientes síntomas causados por su corazón?	no plano: Sí o No
c. Respiración dificultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración dificultosa cuando se esta bañando o vistiendo: f. Respiración dificultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha dificultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco: b. Ataque cerebrovascular: c. Dolor en el pecho: d. Falla de corazón: e. Hinchazón en las piernas o pies (que no sea por caminar): f. Latidos irregulares del corazón: g. Alta presión: h. Algun otro problema cardio-vascular o cardiaco: 6. ¿Ha tenido algunos de los siguientes síntomas causados por su corazón? a. Dolor de pecho frecuente o pecho apretado:	no plano: Sí o No
c. Respiración dificultosa cuando camina normalmente con otras personas sobre terren d. Cuando camina normalmente en terreno plano se encuentra corto de resuello? e. Respiración dificultosa cuando se esta bañando o vistiendo: f. Respiración dificultosa que lo impede trabajar: g. Tos con flema: h. Tos que lo despierta temprano en la mañana: i. Tos que occure cuando esta acostado: j. Ha tosido sangre en el ultimo mes: k. Silbar o respirar con mucha dificultad: l. Silbar que lo impede trabajar: m. Dolor del pecho cuando respira profundamente: n. Otros símtomas que crea usted estar relacionados a los pulmones: 5. ¿Ha tenido algunos de los siguientes problemas con el corazón? a. Ataque cardiaco: b. Ataque cerebrovascular: c. Dolor en el pecho: d. Falla de corazón: e. Hinchazón en las piernas o pies (que no sea por caminar): f. Latidos irregulares del corazón: g. Alta presión: h. Algun otro problema cardio-vascular o cardiaco: 6. ¿Ha tenido algunos de los siguientes síntomas causados por su corazón?	no plano: Sí o No

c. Dolor o pecho apretado que no lo deja trabajar normalmente:	Sí o No
e. Dolor en el pecho o indigestion que no es relacionado a la comida:	u circulation.
7. ¿Esta tomando medicina por algunso de los siguientes problemas? a. Respiración dificultosa:	
b. Problemas del corazón: c. Alta presión :	Sí o No
d. Convulsiones: 8. ¿Le ha causado alguno de los siguientes problemas usando el respirador? (si no ha usado	Sí o No
deje esta pregunta en blanco y continue con pregunta 9).	
a. Irritación de los ojos:	Sí o No
c. Ansiedad que ocurre solamente cuando usa el respirado:	Sí o No
e. Algun otro problema que le impida utilizar su respirador:	ue revisara este
No Las preguntas del 10 al 15 deben ser contestadas por los empleados seleccionados par	
máscara con cartucho químico o aparato respiratorio autónomo (SCBA). Los empleados que u	
respirador no tienen que contestar estas preguntas. 10. ¿Ha perdido la vista en cualquiera de sus ojos (temporalmente o permanente):	_
No	
11. ¿Corrientemente tiene algunos de los siguientes problemas con su vista? a. Usa lentes de contacto:	Sí o No
b. Usa lentes:	Sí o No
c. Daltoniano (dificultad distinguiendo colores):	. Sí o No
d. Tiene algún problema con sus ojos o su vista:	. Sí o No Sí o
13. ¿Corrientemente tiene uno de las siguientes problemas para oir?	
a. Dificultad oyendo:	
c. Tiene algun otro problema con sus oidos o dificultad escuchando: 14. ¿Se ha dañado o lastimado su espalda?	Sí o No
No 15. ¿Tiene uno de los siguientes problemas de su aparato muscular or eskeleto?	
a. Debilidad en sus brazos, manos, piernas o pies :	. Sí o No
b. Dolor de espalda:	Sí o No
c. Dificultad para mover sus brazos y piernas completamente:	
d. Dolor o engarrotamiento cuando se inclina para adelante o para atras:	
e. Dificultad para mover su cabeza para arriba o para abajo completamente:	
f. Difficulted para mover su cabeza de lado a lado:	
g. Dificultad para agacharse doblando sus rodillas:	
i. Dificultad subiendo escaleras cargando mas de 25 libras:	
j. Alguno problema muscular o con sus huesos que le evite usar un respirador:	Sí o No

sanidad con licencia autorizado por el estado.	
1. ¿Esta trabajando en las alturas arriba de 5,000 pies o en sitios que tie	
Si la respuesta es "Sí", se ha sentido mareado, o ha tenido dificultad resotro	
síntoma que usted no tiene cuando no esta trabajando bajo estas condic	iones: Sí o
No	
2. ¿En el trabajo o en su casa, ha estado expuesto a solventes o contami ejemplo,	inantes peligrosos en el aire (por
humos, neblina o polvos) o ha tenido contacto del cutis con químicas po	eligrosas? Sí o
No	•11.81.00.001
Escriba las químicas y productos con las que ha estado expuesto, si sab	e cuales
son:	
3. ¿Ha trabajado con los siguientes materiales o las condiciones anotada	as abajo?:
a. Asbestos:	
b. Sílice (Limpiar mediante un chorro de arena):	
c. Tungsteno/Cobalto (pulverizar o soldadura):	
d. Berilio:	
e. Aluminio:	
f. Carbón de piedra (minando):	
g. Hierro:	
h. Estaño:	
i. Ambiente polvoriento:	Sí o No
j. Otra exposicion peligrosa:	
Describa las exposiciones peligrosas:	
4. ¿Tiene usted otro trabajo o un negocio aparte de este?	
5. Apunte su previos trabajos:	
6. Apunte sus pasatiempos:	
7. ¿Tiene servicio militar?	
	icos durante entrenamiento o
Si la respuesta es "Sí", ha estado expuesto a agentes químicos o biologi	07 37
Si la respuesta es "Sí", ha estado expuesto a agentes químicos o biologicombate:	
Si la respuesta es "Sí", ha estado expuesto a agentes químicos o biologi	ndedor a incidentes de materiales

medicinas que compra sin receta)?	Sí o
No	
Si la respuesta es "Sí", cuales son	
10. ¿Va a usar algunas de las siguientes partes con su respirador?	(C) C(N
a. filtros HEPA (filtro de alta eficiencia que remueve partículas tóxicas en la atr	
b. Canastillo (por ejemplo, máscara para gas):	
c. Cartuchos:	Si o No
11. ¿Cuántas veces espera usar un respirador?	
a. Para salir de peligro solamente (no rescates):	
b. Recates de emergencia solamente:	
c. Menos de 5 horas <i>por semana</i> :	
d. Menos de 2 horas <i>por día</i> :	
e. 2 a 4 horas por día:	
f. Mas de 4 horas <i>por día</i> :	Sí o No
12. ¿Durante el tiempo de usar el respirador, su trabajo es?	
a. Ligero (menos de 200 kcal por hora):	Sí o
No	
Si la respuesta es "sí", cuanto tiempo dura la obrahoras	_minutos
Ejemplos de trabajos ligeros: estar sentado escribiendo, escribiendo a máquina,	diseñando, trabajando la
	, .
línea de	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	Sí o N
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	Sí o N
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	Sí o Noras minutos
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	Sí o Noras minutos
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora): Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah. Ejemplos de trabajos moderados: sentado clavando o archivando; manejando u trafico pesado; estar de pie taladrando, clavando, trabajando la línea de montaje, o tran libras) a la altura de la cintura; caminando sobre tierra plana a 2 millas por hora o bajas empujando una carretilla con una carga pesada (de 100 libras) sobre terreno pla c. Pesado (mas de 350 kcal por hora):	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora): Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah. Ejemplos de trabajos moderados: sentado clavando o archivando; manejando u trafico pesado; estar de pie taladrando, clavando, trabajando la línea de montaje, o tran libras) a la altura de la cintura; caminando sobre tierra plana a 2 millas por hora o bajas empujando una carretilla con una carga pesada (de 100 libras) sobre terreno pla c. Pesado (mas de 350 kcal por hora): No	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora): Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah. Ejemplos de trabajos moderados: sentado clavando o archivando; manejando u trafico pesado; estar de pie taladrando, clavando, trabajando la línea de montaje, o tran libras) a la altura de la cintura; caminando sobre tierra plana a 2 millas por hora o bajas empujando una carretilla con una carga pesada (de 100 libras) sobre terreno pla c. Pesado (mas de 350 kcal por hora): No Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah.	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora): Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah Ejemplos de trabajos moderados: sentado clavando o archivando; manejando u trafico pesado; estar de pie taladrando, clavando, trabajando la línea de montaje, o tran libras) a la altura de la cintura; caminando sobre tierra plana a 2 millas por hora o baja empujando una carretilla con una carga pesada (de 100 libras) sobre terreno pla c. Pesado (mas de 350 kcal por hora): No Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah Ejemplos de trabajos pesados: levantando cargas pesadas (mas de 50 libras) des	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora): Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah Ejemplos de trabajos moderados: sentado clavando o archivando; manejando u trafico pesado; estar de pie taladrando, clavando, trabajando la línea de montaje, o tran libras) a la altura de la cintura; caminando sobre tierra plana a 2 millas por hora o baja empujando una carretilla con una carga pesada (de 100 libras) sobre terreno pla c. Pesado (mas de 350 kcal por hora): No Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah Ejemplos de trabajos pesados: levantando cargas pesadas (mas de 50 libras) des la	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora): Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah. Ejemplos de trabajos moderados: sentado clavando o archivando; manejando u trafico pesado; estar de pie taladrando, clavando, trabajando la línea de montaje, o tran libras) a la altura de la cintura; caminando sobre tierra plana a 2 millas por hora o bajas empujando una carretilla con una carga pesada (de 100 libras) sobre terreno pla c. Pesado (mas de 350 kcal por hora): No Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah. Ejemplos de trabajos pesados: levantando cargas pesadas (mas de 50 libras) des la cintura o los hombros; trabajando cargando o descargando; transpalear; estar de demenuzando moldes; subiendo a 2 millas por hora; subiendo la escalera con un libras).	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora): Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah. Ejemplos de trabajos moderados: sentado clavando o archivando; manejando u trafico pesado; estar de pie taladrando, clavando, trabajando la línea de montaje, o tran libras) a la altura de la cintura; caminando sobre tierra plana a 2 millas por hora o bajar empujando una carretilla con una carga pesada (de 100 libras) sobre terreno pla c. Pesado (mas de 350 kcal por hora): No Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah. Ejemplos de trabajos pesados: levantando cargas pesadas (mas de 50 libras) des la cintura o los hombros; trabajando cargando o descargando; transpalear; estar de demenuzando moldes; subiendo a 2 millas por hora; subiendo la escalera con un libras). 13. ¿Va a estar usando ropa o equipo protectivo cuando use el respirador?	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora): Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah Ejemplos de trabajos moderados: sentado clavando o archivando; manejando u trafico pesado; estar de pie taladrando, clavando, trabajando la línea de montaje, o tran libras) a la altura de la cintura; caminando sobre tierra plana a 2 millas por hora o bajas empujando una carretilla con una carga pesada (de 100 libras) sobre terreno pla c. Pesado (mas de 350 kcal por hora): No Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah Ejemplos de trabajos pesados: levantando cargas pesadas (mas de 50 libras) des la cintura o los hombros; trabajando cargando o descargando; transpalear; estar de demenuzando moldes; subiendo a 2 millas por hora; subiendo la escalera con un libras). 13. ¿Va a estar usando ropa o equipo protectivo cuando use el respirador? No	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora): Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah. Ejemplos de trabajos moderados: sentado clavando o archivando; manejando u trafico pesado; estar de pie taladrando, clavando, trabajando la línea de montaje, o tran libras) a la altura de la cintura; caminando sobre tierra plana a 2 millas por hora o bajas empujando una carretilla con una carga pesada (de 100 libras) sobre terreno pla c. Pesado (mas de 350 kcal por hora): No Si la respuesta es "sí"cuanto tiempo dura en promedio por jornadah. Ejemplos de trabajos pesados: levantando cargas pesadas (mas de 50 libras) des la cintura o los hombros; trabajando cargando o descargando; transpalear; estar de demenuzando moldes; subiendo a 2 millas por hora; subiendo la escalera con un libras). 13. ¿Va a estar usando ropa o equipo protectivo cuando use el respirador? No Si la respuesta es "sí" describa que va a estar	
línea de montaje, o estar parado gobernando un taladro o máquinas: b. Moderado (200-350 kcal por hora):	

7. Describa cualquier situacion especial o peligrosa que pueda encontrar cuando este usando el respi por					
ejemplo, espacios encerrados, gases que lo puedan matar, etc.)					
8. Provea la siguiente informacion si la sabe, por cada sustancia tóxica que usted va a estar expuesto cuando					
este usando el respirador(s):					
Nombre de la primera sustancia tóxica					
Maximo nivel de exposición por jornada de trabajo					
Tiempo de exposición por jornada					
Nombre de la segunda sustancia tóxica					
Maximo nivel de exposición por jornada de trabajo					
Fiempo de exposición por jornada					
Nombre de la tercera sustancia tóxica					
Máximo nivel de exposición por jornada de trabajo					
Fiempo de exposición por jornada					
El nombre de cualquier sustancia tóxica que usted va a estar expuesto cuando este usted usando el espirador					
9. Describa alguna responsabilidad especial que usted va a tener cuando usted este usado el respirad					
oueda afectar la seguridad o la vida de otros (por ejemplo, rescate, seguridad).					

Appendix C:

OSHA Form 200-Occupational Injuries & Illnesses

Log and	Summar	y of Occupational						
Injuries a		<u> </u>						
NOTE:	This form i	s required by Public Law 91-	596 and must be kept	RECORDABLE CASES: You are requ	uired to record information about every			
		olishment for 5 years. Failure		occupational death; every nonfatal occupational illness; and those nonfatal				
	can result in issuance of citations and assessment of penalties.			occupational injuries which involve one or more of the following: loss of				
	(See postii	ng requirements on the other	side of form)	conciousness, restriction of work or motion, transfer to another job, or				
				medical treatment (other than first aid)				
				(See definitions on the other side of for	m)			
Case or	Date of	Employee's Name	Occupation	Department	Description of Injury or Illness			
	Injury or		Сострано	- Sparanon	2 Societal of Injury of Infood			
	Onset of							
l	Illness							
	Enter	Enter first name or initial, middle initial, last name	Enter regular job title, not activity employee was performing when injury occurred or at onset of illness. In the absence of a formal title, enter a brief description of the employee's duties.	Enter department in which the employee is regularly employed or a description of normal workplace to which employee is assigned, even though temporarily working in another department at the time of injury or illness.	Enter a brief description of the injury or illness and indicate the part or parts of the body affected. Typical entries for this column might be: Amputation of 1st joint right forefinger; Strain of lower back; Contact dermatitis on both hands; Electrocution - body.			
(A)	(B)	(C)	(D)	(E)	(F)			
					PREVIOUS PAGE TOTALS =>			
					TOTALS (Instructions on other side of form) =>			
OSHA No. 20	00							

U.S. Dep	artment o	t Labor																
						For C	alendar	Year _			-		Page: _	of				>//
Company Name																	Form Approve	ed
Establishment Nam	е																O.M.B. No. 1	
Establishment Add	ress																See OMB Dis	sclosure
																	Statement on	reverse.
Extent of and Outco	ome of Injury					Type, Exte	ent of, and Ou	utcome of Illn	ess								-	
Fatalities	Nonfatal Injuries					Type of Illr	ness						Fatalities	Nonfatal Illne	sses			
Injury	Injuries with	h Lost Workd	lays		Injuries	CHEC	K Only C	ne Colu	mn for E	ach Illne	ess		Illness	Illnesses with	Lost Workda	ys		Illnesses
Related					Without Lost	(See of	her side	of form f	or termir	nations			Related	Enter a	Enter a	Enter	Enter	without Los
	Enter a	Enter a	Enter	Enter	Workdays	or pern	nanent tr	ansfers)						CHECK if	CHECK if	number of	number of	Workdays
Enter Date	Check	Check	number of	number of	Enter a									Illness	Illness	DAYS	DAYS of	
of death.	if injury	if injury	DAYS	DAYS of	Check if no								Enter	involves	involves	away from	restricted	Enter a
	involves	involves	away from	restricted	entry was								DATE	DAYS away	DAYS away	work.	work activity	CHECK if I
mm/dd/yy	DAYS away from	DAYS away from	work	work activity	made in column 1 or 2					ts			of death,	from work, or DAYS of	from work.			entry was made in
Ппп/аа/уу	work or	work.		activity	but the injury				o of	geu	,	ses		restricted				columns 8
	restricted				is recordable		sb	,	ects	<u>a</u>	₽	nes		work activity				9
	work				as defined		<u> </u>	SUS	eff	ysic	× p	<u>a</u>	mm/dd/yy	or both.				
	activity or				above.	äse	the	ditio	mic.	hd	iate	tion						
	both.					J Sk Dise	e of	Condition	yste als)	e tc	Soc	nba						
						ona	eas	Sic 8	g (s teris	s du	s as I tra	000						
						pati	Dis	iratc o to	ning ma	der	ders	other occupational illnesses						
						Occupational Skin Disorder or Disease	Dust Disease of the lungs	Respiratory Conditions due to toxic agents	Poisoning (systemic effects of toxic materials)	Disorders due to physical agents	Disorders associated with repeated trauma	■ Jan						
						00		_ 22 5			ے ۵	⋖	+					
(1)	(2)	(3)	(4)	(E)	(G)	(0)	(b)	(0)	(7)	(0)	(f)	(a)	(8)	(0)	(10)	(11)	(12)	(13)
(1)	(2)	(3)	(4)	(5)	(6)	(a)	(0)	(c)	(u)	(e)	(1)	(g)	(0)	(9)	(10)	(11)	(12)	(13)
							 										+	
																	<u> </u>	
					<u> </u>												<u> </u>	
						<u> </u>												
Certification	of Annual Sur	mmary Totals	by:					Title: _									Date:	

OMB DISCLOSURE STATEMENT

Public reporting burden for this collection of information is estimated to vary from 4 to 30 (time in minutes) per response with an average of 15 (time in minutes) per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments regarding this estimate or any other aspect of this information collection, including suggestions for reducing this burden, please send them to the OSHA Office of Statistics, Room N-3644, 200 Constitution Avenue, N.W. Washington, D.C. 20210

Instructions for OSHA No. 200

I. Log and Summary of Occupational Injuries and Illnesses

Each employer who is subject to the recordkeeping requirements of the Occupational Safety and Health Act of 1970 must maintain for each establishment, a log of all recordable occupational injuries and illnesses. This form (OSHA No. 200) may be used for that purpose. A substitute for the OSHA No. 200 is acceptable if it is as detailed, easily readable, and understandable as the OSHA No. 200.

Enter each recordable case on the log within six (6) workdays after learning of its occurrence. Although other records must be maintained at the establishment to which they refer, it is possible to prepare and maintain the log at another location, using data processing equipment if desired. If the log is prepared elsewhere, a copy updated to within 45 calendar days must be present at all times in the establishment.

Logs must be maintained and retained for five (5) years following the end of the calendar year to which they relate. Logs must be available (normally at the establishment) for inspection and copying by representatives of the Department of Labor, or the Department of Health and Human Services, or States accorded jurisdiction under the Act. Access to the log is also provided to employees, former employees and their representatives.

II. Changes in Extent of or Outcome of Injury or Illness

If, during the 5-year period the log must be retained, there is a change in an extent and outcome of an injury or illness which affects entries in columns 1, 2, 6, 8, 9, or 13, the first entry should be lined out and a new entry made. For example, if an injured employee at first required only medical treatment but later lost workdays away from work, the check in column 6 should be lined out and checks entered in columns 2 and 3 and the number of lost workdays entered in column 4.

In another example, if an employee with an occupational illness lost wordays, returned to work, and then died of the illness, any entries in columns 9 through 12 would be lined out and the date of death entered in column 8.

The entire entry for an injury or illness should be lined out if later found to be nonrecordable. For example, an injury which is later determined not to be work related, or which was initially thought to involve medical treatement but later was determined to have involved only first aid.

III. Posting Requirements

A copy of the totals and information following the total line of the last page for the year, must be posted at each establishment in the place or places where notices to employees are customarily posted. This copy must be posted no later than February 1 and must remain in place until March 1. Even though there were no injuries or illnessed during the year, zeros must be entered on the totals line, and the form posted.

The person responsible for the annual summary totals shall certify that the totals are true and complete by signing at the bottom of the form.

IV. Instructions for Completing Log and Summary of Occupational injuries and illnesses

Column A - CASE OR FILE NUMBER. Self Expanatory

Column B - DATE OF INJURY OR ONSET OF ILLNESS

For occupational injuries, enter the date of the work accident which resulted in the injury. For occupational illnesses, enter the date of initial diagnosis of illness, or, if absence from work occurred before diagnosis, enter the first day of the absence attributable to the illness which was later diagnosed or recognized.

Columns C through F - Self Explanatory

Columns 1 and 8 - INJURY OR ILLNESS-RELATED DEATHS - Self Explanatory

Columns 2 and 9 - INJURIES OR ILLNESSES WITH LOST WORKDAYS - Self Explanatory

Any injury which involves days away from work, or days of restricted work activitiy, or both, must be recorded since it always involves one or more of the criteria for recordability.

Columns 3 and 10 - INJURIES OR ILLNESSES INVOLVING DAYS AWAY FROM WORK - Self Explanatory

Columns 4 and 11 - LOST WORKDAYS -- DAYS AWAY FROM WORK.

Enter the number of workdays (consecutive or not) on which the employee would have worked but could not because of occupational injury or illness. The number of lost workdays should not include the day of injury or onset of illness or any days on which the employee would not have worked even though able to work. NOTE: For employees not having a regularly scheduled shift, such as certain truck drivers, construction workers, farm labor, casual labor, part-time employees, etc., it may be necessary to estimate the number of lost workdays. Estimates of lost workdays shall be based on prior work history of the employee AND days worked by employees, not ill or injured, working in the department and/or occupation of the ill or injured employee.

Columns 5 and 12 - LOST WORKDAYS -- DAYS OF RESTRICTED WORK ACTIVITY.

Enter the number of workdays (consecutive or not) on which because of injury or illness:

- (1) the employee was assigned to another job on a temporary basis, or
- (2) the employee worked at a permanent job less than full time, or
- (3) the employee worked at a permanently assigned job but could not perform all duties normally connected with it.

The number of lost workdays should not include the day of injury or onset of illness or any days on which the employee would not have worked even though able to work.

Columns 6 and 13 - INJURIES OR ILLNESSES WITHOUT LOST WORKDAYS - Self Explanatory

Columns 7a through 7g - TYPE OF ILLNESS. Enter a check in only one column for each illness.

TERMINATION OR PERMANENT TRANSFER - Place an asterisk to the right of the entry in columns 7a through 7g (type of illness) which represented a termination of employment or permanent transfer.

V. Totals

Add number of entries in columns 1 and 8.

Add number of checks in columns 2, 3, 6, 7, 9, 10 and 13.

Add number of days in columns 4, 5, 11 and 12.

Yearly totals for each column (1-13) are required for posting. Running or page totals may be generated at the discretion of the employer.

In an employee's loss of workdays is continuing at the time the totals are summarized, estimate the number of future workdays the employee will lose and add that estimate to the workdays already lost and include this figure in the annual totals. No further entries are to be made with respect to such cases in the next year's log.

VI. Definitions

OCCUPATIONAL INJURY is any injury such as a cut, fracture, sprain, amputation, etc. which results from a work accident or from an exposure involving a single incident in the work environment. NOTE: Conditions resulting from animal bites, such as insect or snake bites or from one-time exposure to chemicals, are considered to be injuries.

OCCUPATIONAL ILLNESS of an amployee is any abnormal condition or disorder, other than one resulting from an occupational injury, caused by exposure to environmental factors associated with employment. It includes acute and chronic illnesses or diseases which may be caused by inhalation, absorption, ingestion, or direct contact.

The following listing gives the categories of occupational illnesses and disorders that will be utilized for the purpose of classifying recordable illnesses. For porposes of information, examples of each category are given. These are typical examples, however, and are not to be considered the complete listing of the types of illnesses and disorders that are to be counted under each category.

- 7a. Occupational Skin Diseases or Disorders. Examples: Contact dermatitis, eczema, or rash caused by primary irritants and sensitizers or poisonous plants; oil acne; chrome ulcers; chemical burns or inflamation, etc.
- 7b. Dust Diseases of the Lungs (Pneumaconioses). Examples: Silicosis, asbestosis and other asbestos-related diseases, coal worker's pneumaconioses, byssinosis, siderosis, and other pneumaconioses.
- 7c. Respiratory Conditions Due to Toxic Agents. Examples: Pneumonitis, pharyngitis, rhinitis or acute congestion due to chemicals, dusts, gases, or fumes; farmer's lung; etc.
- 7d. Poisoning (Systemic Effects of Toxic Materials). Examples: Poisoning by lead, mercury, cadmium, arsenic, or other metals; poisoning by

carbon monoxide, hydrogen sulfide, or other gases; poisoning by benzol, carbon tetrachloride, or other organic solvents; poisoning by insecticide sprays such as parathion, lead arsenate; poisoning by other chemicals such as formaldehyde, plastics, and resins; etc.

- 7e. Disorders Due to Physical Agents (Other than Toxic Materials). Examples: Heatstroke, sunstroke, heat exhaustion, and other effects of environmental heat, freezing, frostbite, and effects of exposure to low temperatures; caisson disease; effects of ionizing radiation (isotopes, X-rays, radium); effects of nonionizing radiation (welding flash, ultraviolet rays, microwaves, sunburn); etc.
- 7f. Disorders Associated with Repeated Trauma. Examples: Noise-induced hearing loss; synovitis, tenosynovitis, and bursitis. Raynaud's phenomena; and other conditions due to repeated motion, vibration, or pressure.
- 7g. All Other Occupational Illnesses. Examples: Anthrax, brucellosis, infectious hepatitis, malignant and benign tumors, food poisoning, histoplasmosis, coccidioidomycosis, etc.

MEDICAL TREATMENT includes treatment (other than first aid) administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does NOT include first aid treatment (one-time treatment and subsequent observation of minor scratches, cuts, burns, splinters, and so forth, which do not ordinarily require medical care) even though provided by a physician or registered professional personnel.

ESTABLISHMENT: A single physical location where business is conducted or where services or industrial operations are performed (for example: a factory, mill, store, hotel, resturant, movie theater, farm, ranch, bank, sales office, warehouse, or central administrative office). Where distinctly separate activities are performed at a single physicial location, such as construction activities operated from the same physical locations as a lumber yard, each activity shall be treated as a separate establishment.

For firms engaged in activities which may be physically dispersed, such as agriculture; construction; transportation; communications and electric, gas, and sanitary services, records may be maintained at a place to which employees report each day.

Records for personnel who do not primarily report or work at a single establishment, such as traveling salesmen, technicians, engineers, etc., shall be maintained at the location from which they are paid or the base from which personnel operate to carry out their activities.

WORK ENVIRONMENT is comprised of the physical location, equipment, materials processed or used, and the kinds of operations performed in the course of an employee's work, wether on or off the employer's premisis.

Appendix D:

MSDS Sheets

SAFETY DATA SHEET

according to Regulation (EC) No. 1907/2006

Version 5.0 Revision Date 29.10.2012

Print Date 19.04.2017

GENERIC EU MSDS - NO COUNTRY SPECIFIC DATA - NO OEL DATA

1. IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

1.1 Product identifiers

Product name : Arsenic

Product Number : 267961
Brand : Aldrich

Index-No. : 033-001-00-X CAS-No. : 7440-38-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Israel Ltd.

3 PARK RABIN, PLAUT 7670603 REHOVOT

ISRAEL

Telephone : +972 8948-4222 Fax : +972 8948-4200

1.4 Emergency telephone number

Emergency Phone # : +972 (8) 948-4222

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

Classification according to Regulation (EC) No 1272/2008 [EU-GHS/CLP]

Acute aquatic toxicity (Category 1) Chronic aquatic toxicity (Category 1) Acute toxicity, Inhalation (Category 3) Acute toxicity, Oral (Category 3)

Classification according to EU Directives 67/548/EEC or 1999/45/EC

Toxic by inhalation and if swallowed. Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

2.2 Label elements

Labelling according Regulation (EC) No 1272/2008 [CLP]

Pictogram

Signal word Danger

Hazard statement(s)

H301 Toxic if swallowed. H331 Toxic if inhaled.

H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P273 Avoid release to the environment.

P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/

Aldrich - 267961 Page 1 of 7

physician.

P311 Call a POISON CENTER or doctor/ physician.

P501 Dispose of contents/ container to an approved waste disposal plant.

Supplemental Hazard

Statements

none

According to European Directive 67/548/EEC as amended.

Hazard symbol(s)

R-phrase(s)

R23/25 Toxic by inhalation and if swallowed.

R50/53 Very toxic to aquatic organisms, may cause long-term adverse effects in

the aquatic environment.

S-phrase(s)

S20/21 When using do not eat, drink or smoke.

S28 After contact with skin, wash immediately with plenty of soap and water.

S45 In case of accident or if you feel unwell, seek medical advice immediately

(show the label where possible).

S60 This material and its container must be disposed of as hazardous waste.
S61 Avoid release to the environment. Refer to special instructions/ Safety

data sheets.

2.3 Other hazards - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : As

Molecular Weight : 74,92 g/mol

Component		Concentration
Arsenic		
CAS-No.	7440-38-2	-
EC-No.	231-148-6	
Index-No.	033-001-00-X	

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

Absorption into the body leads to the formation of methemoglobin which in sufficient concentration causes cyanosis. Onset may be delayed 2 to 4 hours or longer.

4.3 Indication of any immediate medical attention and special treatment needed

no data available

Aldrich - 267961 Page 2 of 7

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Arsenic oxides

5.3 Advice for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

5.4 Further information

no data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed.

7.2 Conditions for safe storage, including any incompatibilities

Store in cool place. Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end uses

no data available

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Aldrich - 267961 Page 3 of 7

The selected protective gloves have to satisfy the specifications of EU Directive 89/686/EEC and the standard EN 374 derived from it.

Immersion protection Material: Nitrile rubber

Minimum layer thickness: 0,11 mm Break through time: > 480 min

Material tested:Dermatril® (Aldrich Z677272, Size M)

Splash protection Material: Nitrile rubber

Minimum layer thickness: 0,11 mm Break through time: > 30 min

Material tested:Dermatril® (Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 873000, e-mail sales@kcl.de,

test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an Industrial Hygienist familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N99 (US) or type P2 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance Form: powder

Colour: grey

b) Odour no data availablec) Odour Threshold no data availabled) pH no data available

e) Melting point/freezing

point

Melting point/range: 817 °C - lit.

f) Initial boiling point and

.

613 °C - lit.

boiling range

) Flash point not applicable

h) Evaporation rate no data available

i) Flammability (solid, gas) no data available

Upper/lower flammability or explosive limits no data available

k) Vapour pressure no data available
 l) Vapour density no data available
 m) Relative density 5,727 g/mL at 25 °C

n) Water solubility no data available

) Partition coefficient: n-

no data available

octanol/water

Aldrich - 267961 Page 4 of 7

p) Autoignition no data available

temperature

q) Decomposition no data available

temperature

r) Viscosity no data available
 s) Explosive properties no data available
 t) Oxidizing properties no data available

9.2 Other safety information

no data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

no data available

10.2 Chemical stability

no data available

10.3 Possibility of hazardous reactions

no data available

10.4 Conditions to avoid

Heat. Exposure to air may affect product quality.

10.5 Incompatible materials

Oxidizing agents, Halogens, Palladium undergoes a violent reaction with arsenic, Zinc, Platinum oxide, Nitrogen trichloride, Bromine azide

10.6 Hazardous decomposition products

Other decomposition products - no data available

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - rat - 763 mg/kg

Remarks: Behavioral: Ataxia. Diarrhoea

LD50 Oral - mouse - 145 mg/kg

Remarks: Behavioral: Ataxia. Diarrhoea

Inhalation: no data available

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

This is or contains a component that has been reported to be carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

IARC: 1 - Group 1: Carcinogenic to humans (Arsenic)

Reproductive toxicity

no data available

Aldrich - 267961 Page 5 of 7

Specific target organ toxicity - single exposure

no data available

Specific target organ toxicity - repeated exposure

no data available

Aspiration hazard

no data available

Potential health effects

Inhalation Toxic if inhaled. May cause respiratory tract irritation.

Ingestion Harmful if swallowed.

Skin May be harmful if absorbed through skin. May cause skin irritation.

Eyes May cause eye irritation.

Signs and Symptoms of Exposure

Absorption into the body leads to the formation of methemoglobin which in sufficient concentration causes cyanosis. Onset may be delayed 2 to 4 hours or longer.

Additional Information

RTECS: CG0525000

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 9,9 mg/l - 96,0 h

Toxicity to daphnia and

EC50 - Daphnia magna (Water flea) - 3,8 mg/l - 48 h

other aquatic invertebrates

12.2 Persistence and degradability

no data available

12.3 Bioaccumulative potential

no data available

12.4 Mobility in soil

no data available

12.5 Results of PBT and vPvB assessment

no data available

12.6 Other adverse effects

Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

14.1 UN number

ADR/RID: 1558 IMDG: 1558 IATA: 1558

14.2 UN proper shipping name

ADR/RID: ARSENIC IMDG: ARSENIC IATA: Arsenic

Aldrich - 267961 Page 6 of 7

14.3 Transport hazard class(es)

ADR/RID: 6.1 IMDG: 6.1 IATA: 6.1

14.4 Packaging group

ADR/RID: II IMDG: II IATA: II

14.5 Environmental hazards

ADR/RID: yes IMDG Marine pollutant: yes IATA: no

14.6 Special precautions for user

no data available

15. REGULATORY INFORMATION

This safety datasheet complies with the requirements of Regulation (EC) No. 1907/2006.

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture no data available

15.2 Chemical Safety Assessment

no data available

16. OTHER INFORMATION

Further information

Copyright 2012 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Aldrich - 267961 Page 7 of 7



SAFETY DATA SHEET

Revision Date 19-Jan-2018 Revision Number 3

1. Identification

Product Name 1,2-Benzanthracene

Cat No.: AC105250000; AC105250010; AC105252500

Synonyms Benzóa!anthracene; Tetraphene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Carcinogenicity Category 1B

Label Elements

Signal Word

Danger

Hazard Statements

May cause cancer



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Response

IF exposed or concerned: Get medical attention/advice

Storage

Store locked up

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

WARNING. Cancer - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component	CAS-No	Weight %	
Benz[a]anthracene	56-55-3	99	

4. First-aid measures

Eye Contact Immediate medical attention is required. Rinse immediately with plenty of water, also under

the eyelids, for at least 15 minutes.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

clothes and shoes. Immediate medical attention is required.

Inhalation Remove from exposure, lie down. Remove to fresh air. If not breathing, give artificial

respiration. Immediate medical attention is required.

Ingestion Call a physician immediately. Clean mouth with water.

Most important symptoms and

effects

No information available.

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Water spray. Carbon dioxide (CO 2). Dry chemical. Chemical foam.

Unsuitable Extinguishing Media No information available

Flash Point No information available Method - No information available

Autoignition Temperature

Explosion Limits

Upper

Not applicable

No data available

Revision Date 19-Jan-2018 1,2-Benzanthracene

Lower No data available Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Do not allow run-off from fire-fighting to enter drains or water courses.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO₂).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
0	1	0	N/A

6. Accidental release measures

Personal Precautions Environmental Precautions Ensure adequate ventilation. Use personal protective equipment as required. Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained.

Methods for Containment and Clean Sweep up and shovel into suitable containers for disposal. Up

	7. Handling and storage
Handling	Do not breathe dust. Do not get in eyes, on skin, or on clothing. Handle product only in closed system or provide appropriate exhaust ventilation.
Storage	Keep in a dry, cool and well-ventilated place. Refer product specification and/or product label for specific storage temperature requirement. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines

This product does not contain any hazardous materials with occupational exposure limitsestablished by the region specific regulatory bodies.

Ensure adequate ventilation, especially in confined areas. **Engineering Measures**

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

Physical and chemical properties

Powder Solid **Physical State**

AppearanceBeigeOdorOdorless

Odor Threshold

pH

No information available

No information available

Melting Point/Range 158 - 161 °C / 316.4 - 321.8 °F

Boiling Point/Range 437.6 °C / 819.7 °F Flash Point No information available Evaporation Rate Not applicable

Flammability (solid,gas)

No information available

Flammability or explosive limits

UpperNo data availableLowerNo data availableVapor PressureNo information availableVapor DensityNot applicable

Specific Gravity
Solubility
No information available
Partition coefficient; n-octanol/water
No data available
No data available

Autoignition Temperature Not applicable

Decomposition TemperatureNo information available

ViscosityNot applicableMolecular FormulaC18 H12Molecular Weight228.29

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products.

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous PolymerizationNo information available.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product InformationNo acute toxicity information is available for this product

Component Information

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

IrritationNo information availableSensitizationNo information available

CarcinogenicityThe table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Benz[a]anthracene	56-55-3	Group 2B	Reasonably	A2	X	A2
			Anticipated			

Mutagenic Effects Ames test: positive.

Reproductive EffectsNo information available.

Developmental EffectsNo information available.

Teratogenicity No information available.

STOT - single exposureSTOT - repeated exposure
None known

Aspiration hazard No information available

Symptoms / effects,both acute and No information available

delayed

Endocrine Disruptor Information

Component	EU - Endocrine Disrupters	EU - Endocrine Disruptors -	Japan - Endocrine Disruptor	
	Candidate List	Evaluated Substances	Information	
Benz[a]anthracene	Benz[a]anthracene Group III Chemical		Not applicable	

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

The product contains following substances which are hazardous for the environment. Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Benz[a]anthracene	Not listed	Not listed	EC50 = 0.26 mg/L 15 min	LC50: = 0.01 mg/L, 96h Static (Daphnia magna) EC50: = 0.0042 mg/L, 48h
				(Daphnia magna)

Persistence and Degradability May persist

Bioaccumulation/ Accumulation No information available.

Mobility . Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Benz[a]anthracene	5.61

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes		
Benz[a]anthracene - 56-55-3	U018	=		

14. Transport information

DOT Not regulated Not regulated

IATA

JN-No UN3077

Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.*

Hazard Class 9
Packing Group III

IMDG/IMO

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Benz[a]anthracene	56-55-3	Χ	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed '-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

	Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
ı	Benz[a]anthracene	56-55-3	-	X	200-280-6	-	-	-	Х	-

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Benz[a]anthracene	56-55-3	99	0.1

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Benz[a]anthracene	-	-	-	X

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA This material, as supplied, contains one or more substances regulated as a hazardous

substance under the Comprehensive Environmental Response Compensation and Liability

Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Benz[a]anthracene	10 lb	-

California Proposition 65 This product contains the following Proposition 65 chemicals.

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Benz[a]anthracene	56-55-3	Carcinogen	0.033 µg/day	Carcinogen

U.S. State Right-to-Know

Regulations

	Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Γ	Benz[a]anthracene	X	X	X	X	Х

U.S. Department of Transportation

Reportable Quantity (RQ): N

DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

Revision Date 19-Jan-2018 **Print Date** 19-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Revision Date 14-Feb-2020 Revision Number 2

1. Identification

Product Name Benzo[a]pyrene

Cat No.: 15856

CAS-No 50-32-8

Synonyms Benzo[def]chrysene.; 3,4-Benzopyrene; 3,4-Benzpyrene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Alfa Aesar

Thermo Fisher Scientific Chemicals, Inc.

30 Bond Street

Ward Hill, MA 01835-8099

Tel: 800-343-0660 Fax: 800-322-4757 **Email:** tech@alfa.com

www.alfa.com

Emergency Telephone Number

During normal business hours (Monday-Friday, 8am-7pm EST), call (800) 343-0660.

After normal business hours, call Carechem 24 at (866) 928-0789.

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin SensitizationCategory 1Germ Cell MutagenicityCategory 1BCarcinogenicityCategory 1AReproductive ToxicityCategory 1B

Label Elements

Signal Word

Danger

Hazard Statements

May cause an allergic skin reaction

May cause genetic defects

May cause cancer

May damage fertility. May damage the unborn child



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Avoid breathing dust/fume/gas/mist/vapors/spray

Contaminated work clothing should not be allowed out of the workplace

Wear protective gloves

Response

IF exposed or concerned: Get medical attention/advice

Skin

IF ON SKIN: Wash with plenty of soap and water

If skin irritation or rash occurs: Get medical advice/attention

Wash contaminated clothing before reuse

Storage

Store locked up

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

WARNING. Cancer - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Benzo[a]pyrene	50-32-8	> 96

4. First-aid measures

General Advice If symptoms persist, call a physician.

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists,

call a physician.

Inhalation Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if

symptoms occur.

Ingestion Clean mouth with water and drink afterwards plenty of water. Get medical attention if

symptoms occur.

Most important symptoms and

effects

None reasonably foreseeable. May cause allergic skin reaction. Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and

feet, dizziness, lightheadedness, chest pain, muscle pain or flushing

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media No information available

Flash Point No information available Method - No information available

Autoignition Temperature

Explosion Limits

Not applicable

Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Do not allow run-off from fire-fighting to enter drains or water courses.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO2).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

HealthFlammabilityInstabilityPhysical hazards210N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment as required. Avoid dust

formation.

Environmental PrecautionsDo not flush into surface water or sanitary sewer system. Do not allow material to

contaminate ground water system. Prevent product from entering drains. Local authorities

should be advised if significant spillages cannot be contained.

Methods for Containment and Clean Sweep up and shovel into suitable containers for disposal. Keep in suitable, closed **Up**

5

7. Handling and storage

Handling Wear personal protective equipment/face protection. Ensure adequate ventilation. Do not

get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Avoid dust formation.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Benzo[a]pyrene		TWA: 0.2 mg/m ³		

Legend

OSHA - Occupational Safety and Health Administration

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StatePowder SolidAppearanceDark yellowOdoraromatic

Odor Threshold No information available

pH Not applicable

 Melting Point/Range
 175 - 179 °C / 347 - 354.2 °F

 Boiling Point/Range
 495 °C / 923 °F @ 760 mmHg

Flash Point No information available

Evaporation Rate Not applicable

Flammability (solid,gas)

No information available

Flammability or explosive limits

UpperNo data availableLowerNo data availableVapor PressureNo information available

Vapor Density Not applicable

Specific GravityNo information availableSolubilityInsoluble in waterPartition coefficient; n-octanol/waterNo data available

Autoignition Temperature Not applicable

Decomposition TemperatureNo information available

ViscosityNot applicableMolecular FormulaC20H12Molecular Weight252.31

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products.

Incompatible Materials Oxidizing agent

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information Component Information

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Revision Date 14-Feb-2020 Benzo[a]pyrene

Irritation No information available

Sensitization May cause sensitization by skin contact

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Benzo[a]pyrene	50-32-8	Group 1	Reasonably	A2	X	A2
			Anticipated			

IARC (International Agency for Research on Cancer)

IARC (International Agency for Research on Cancer)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans Group 2B - Possibly Carcinogenic to Humans

NTP: (National Toxicity Program) NTP: (National Toxicity Program) Known - Known Carcinogen

Reasonably Anticipated - Reasonably Anticipated to be a Human

Carcinogen

A1 - Known Human Carcinogen ACGIH: (American Conference of Governmental Industrial

Hygienists)

A2 - Suspected Human Carcinogen

A3 - Animal Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

Mutagenic Effects No information available

Reproductive Effects No information available.

No information available. **Developmental Effects**

Teratogenicity No information available.

STOT - single exposure None known STOT - repeated exposure None known

No information available **Aspiration hazard**

delayed

Symptoms / effects, both acute and Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing

Endocrine Disruptor Information

Component	EU - Endocrine Disrupters	EU - Endocrine Disruptors -	Japan - Endocrine Disruptor
	Candidate List	Evaluated Substances	Information
Benzo[a]pyrene	Group III Chemical	Not applicable	Not applicable

Other Adverse Effects

The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Persistence and Degradability May persist

Bioaccumulation/ Accumulation No information available.

Mobility Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Benzo[a]pyrene	6.06

13. Disposal considerations

Chemical waste generators must determine whether a discarded chemical is classified as a **Waste Disposal Methods**

hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Benzo[a]pyrene - 50-32-8	U022	-

14. Transport information

DOT

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Technical Name Benzo[a]pyrene

Hazard Class 9
Packing Group III

TDG

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

<u>IATA</u>

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

IMDG/IMO

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Benzo[a]pyrene	50-32-8	X	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Benzo[a]pyrene	50-32-8	X	1	200-028-5	X	ı	1	Χ	KE-05-0184

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Benzo[a]pyrene	50-32-8	> 96	0.1

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Benzo[a]pyrene	-	-	X	X

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA Not applicable

Component	Hazardous Substances RQs	CERCLA EHS RQs
Benzo[a]pyrene	1 lb	-

California Proposition 65 This product contains the following Proposition 65 chemicals.

	Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Γ	Benzo[a]pyrene	50-32-8	Carcinogen	0.06 μg/day	Carcinogen

U.S. State Right-to-Know

Regulations

	Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Γ	Benzo[a]pyrene	Χ	X	Х	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Health, Safety and Environmental Department

Email: tech@alfa.com

www.alfa.com

Revision Date 14-Feb-2020 Print Date 14-Feb-2020

Revision Summary SDS authoring systems update, replaces ChemGes SDS No. 50-32-8/1.

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



Safety Data Sheet Revision Date: 07/31/19

www.restek.com

2 Letter ISO country code/language code: US/EN

1. IDENTIFICATION

Catalog Number / Product Name: 31272 / Benzo(b)fluoranthene Standard

Company:

Address:

Restek Corporation
110 Benner Circle
Bellefonte, Pa. 16823
Phone#:

814-353-1300

 Phone#:
 814-353-1300

 Fax#:
 814-353-1309

Emergency#: 800-424-9300 (CHEMTREC) 703-527-3887 (Outside the US)

Email: www.restek.com

Revision Number: 11

Intended use: For Laboratory use only

2. HAZARD(S)IDENTIFICATION

Emergency Overview:







Symbols:

GHS Hazard

GHS Carcinogenicity Category 1B Classification: Flammable Liquid Category 2

Serious Eye Damage/Eye Irritation Category 2

Specific Target Organ Systemic Toxicity (STOT) - Single Exposure Category 3

GHS Signal

Word:

GHS Hazard:

Danger

Highly flammable liquid and vapour.

Causes serious eye irritation. May cause drowsiness or dizziness.

May cause cancer.

GHS

Precautions:

Safety Obtain special instructions before use.

Precautions: Do not handle until all safety precautions have been read and understood.

Keep away from heat/sparks/open flames/hot surfaces. – No smoking.

Ground/bond container and receiving equipment.

Use explosion-proof electrical/ventilation and lighting equipment.

Use only non-sparking tools.

Take precautionary measures against static discharge. Avoid breathing dust/fume/gas/mist/vapours/spray. Wash hands and skin thoroughly after handling. Use only outdoors or in a well-ventilated area.

Wear protective gloves/protective clothing/eye protection/face protection.

First Aid Measures:

IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing.

IF exposed or concerned: Get medical advice/attention.

Call a POISON CENTER or doctor/physician if you feel unwell.

If eye irritation persists: Get medical advice/attention.

In case of fire: Use extinguishing media in section 5 for extinction.

Storage: Store in a well-ventilated place. Keep container tightly closed.

Store in a well-ventilated place. Keep cool.

Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

Single Exposure Specific target organ toxicity - Single exposure - STOT SE 3: H336 May cause drowsiness or dizziness.

Exposure Target Organs:

Repeated No data available

Exposure Target Organs:

3. COMPOSITION / INFORMATION ON INGREDIENT

Chemical Name	CAS#	EINEC #	% Composition
Acetone	67-64-1	200-662-2	99.9
benzo (b) fluoranthene	205-99-2	205-911-9	0.1

4. FIRST-AID MEASURES

Inhalation: Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not

breathing, give artificial respiration and have a trained individual administer oxygen. Get

medical attention immediately

Eyes: Flush eyes with plenty of water for at least 20 minutes retracting eyelids often. Tilt the head to

prevent chemical from transferring to the uncontaminated eye. Get immediate medical

attention.

Skin Contact: Wash with soap and water. Remove contaminated clothing and launder. Get medical

attention if irritation develops or persists.

Ingestion: Do not induce vomiting and seek medical attention immediately. Drink two glasses of water

or milk to dilute. Provide medical care provider with this SDS.

5. FIRE- FIGHTING MEASURES

Extinguishing Media: Use alcohol resistant foam, carbon dioxide, or dry chemical extinguishing

agents. Water spray or fog may also be effective for extinguishing if swept across the base of the fire. Water can also be used to absorb heat and keep exposed material from being damaged by fire. Flammable component(s) of this material may be lighter than water and burn while

floating on the surface.

Fire and/or Explosion Hazards: Vapors may be ignited by heat, sparks, flames or other sources of

ignition at or above the low flash point giving rise to a Class B fire. Vapors are heavier than air and may travel to a source of ignition and

flash back

Fire Fighting Methods and Protection: Do not enter fire area without proper protection including self-contained

toxic breathing apparatus and full protective equipment. Fight fire from a safe distance and a protected location due to the potential of hazardous vapors and decomposition products. Flammable component(s) of this material may be lighter than water and burn while floating on the surface. Use water spray/fog for cooling. Flammable component(s) of this

material may be lighter than water and burn while floating on the surface.

Hazardous Combustion Products: Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions and Equipment: Exposure to the spilled material may be irritating or harmful. Follow

personal protective equipment recommendations found in Section 8 of this SDS. Additional precautions may be necessary based on special circumstances created by the spill including; the material spilled, the quantity of the spill, the area in which the spill occurred. Also consider the

expertise of employees in the area responding to the spill.

Methods for Clean-up: Prevent the spread of any spill to minimize harm to human health and the

environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal

7. HANDLING AND STORAGE

Handling Technical Measures and Precautions: Harmful or irritating material. Avoid contacting and avoid

breathing the material. Use only in a well ventilated area. Use

spark-proof tools and explosion-proof equipment

Storage Technical Measures and Conditions: Store in a cool dry ventilated location. Isolate from

incompatible materials and conditions. Keep container(s)

closed. Keep away from sources of ignition

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

United States: Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
Acetone	67-64-1	2500 ppm IDLH (10% LEL)	750 ppm STEL; 1782 mg/m3 STEL	500 ppm TWA; 1188 mg/m3 TWA	1000 ppm TWA; 2400 mg/m3 TWA
benzo (b) fluoranthene	205-99-2	Not established	None Known	Not established	No data available

Personal Protection:

Engineering Measures: Local exhaust ventilation is recommended when generating excessive levels of

vapours from handling or thermal processing.

Respiratory Protection: No respiratory protection required under normal conditions of use. Provide

general room exhaust ventilation if symptoms of overexposure occur as explained

Section 3. A respirator is not normally required.

Eye Protection: Wear chemically resistant safety glasses with side shields when handling this

product. Do not wear contact lenses.

Skin Protection: Wear protective gloves. Inspect gloves for chemical break-through and replace at

regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when

leaving work

Medical Conditions Aggravated By Exposure: Respiratory disease including asthma and bronchitis

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color: Depends upon product selection

Odor: Strong

Physical State:No data availablepH:Not applicableVapor Pressure:No data availableVapor Density:2.0 (air = 1)

Boiling Point (°C): 56.05 °C at 1013.25 hPa **Melting Point (°C):** -95.4 °C Melting Point

Flash Point (°F):

Flammability: Highly Flammable
Upper Flammable/Explosive Limit, % in air: No data available
Lower Flammable/Explosive Limit, % in air: No data available
Autoignition Temperature (°C): 465 deg C
Decomposition Temperature (°C): No data available
Specific Gravity: 0.7845 g/cm3 at 25 °C
Evaporation Rate: No data available

Odor Threshold: ND

Solubility: Complete; 100% Partition Coefficient: n-octanol in water: No data available

VOC % by weight: 99.9 Molecular Weight: 58.08

10. STABILITY AND REACTIVITY

Stability: Stable under normal conditions.

Conditions to Avoid: None known.

Materials to Avoid / Chemical Incompatiability:Strong oxidizing agents Strong acidsHazardous Decomposition Products:Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry: Inhalation, Skin Contact, Eye Contact, Ingestion

Target Organs Potentially Affected By Exposure: Eyes, Central nervous system stimulation,

Respiratory Tract, Skin

Chemical Interactions That Change Toxicity: None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation: Can cause minor respiratory irritation, dizziness, weakness, fatigue, nausea,

and headache.

Skin Contact: Can cause minor skin irritation, defatting, and dermatitis. **Eye Contact:** Can cause minor irritation, tearing and reddening.

Ingestion Irritation: May be harmful if swallowed.

Ingestion Toxicity: Harmful if swallowed. May cause systemic poisoning.

Long-Term (Chronic) Health Effects:

Carcinogenicity: Contains a probable or known human carcinogen.

Reproductive and Developmental Toxicity:No data available to indicate product or any components present at greater than 0.1% may cause birth defects.

Inhalation:Upon prolonged and/or repeated exposure, can cause minor respiratory irritation, dizziness, weakness, fatigue,

nausea, and headache.

Skin Contact: Upon prolonged or repeated contact, can cause minor

skin irritation, defatting, and dermatitis.

Component Toxicological Data:

NIOSH:

Chemical Name CAS No. LD50/LC50

Acetone 67-64-1 Dermal LD50 Rabbit >15700 mg/kg; Inhalation

LC50 Rat 50100 mg/m3 8 h; Oral LD50 Rat

5800 mg/kg

Component Carcinogenic Data:

OSHA:

Chemical Name CAS No.

Benzo(b)fluoranthene 205-99-2 Present

ACGIH:

Chemical Name CAS No.

Benzo[b]fluoranthene 205-99-2 A2 - Suspected Human Carcinogen

Acetone 67-64-1 A4 - Not Classifiable as a Human Carcinogen

NIOSH:

Chemical Name CAS No.

No data available

NTP:

Chemical Name CAS No.

No data available

IARC:

 Chemical Name
 CAS No.
 Group No.

 Monograph 92 [2010]:
 205-99-2
 Group 2B

Supplement 7 [1987]; Monograph

32 [1983]

12. ECOLOGICAL INFORMATION

Overview: This material is not expected to be harmful to the ecology.

Mobility:No dataPersistence:No dataBioaccumulation:No dataDegradability:No data

Ecological Toxicity Data: No data available

13. DISPOSAL CONSIDERATIONS

Waste Description of Spent Product: Spent or discarded material is a hazardous waste. Mixing

spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous

waste determination on mixtures.

Disposal Methods: Dispose of by incineration following Federal, State, Local,

or Provincial regulations.

Waste Disposal of Packaging: Comply with all Local, State, Federal, and Provincial

Environmental Regulations.

14. TRANSPORTATION INFORMATION

United States:

DOT Proper Shipping Name:
UN Number:
UN1090
Hazard Class:
Packing Group:

Acetone
UN1090
II

International:

IATA Proper Shipping Name:
UN Number:
UN1090
Hazard Class:
Packing Group:

II

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

15. REGULATORY INFORMATION

United States: Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA	
Acetone	67-64-1	Χ	-	-	Χ	
benzo (b) fluoranthene	205-99-2	Χ	Χ	-	-	

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS#	Regulation
Benzo[b]fluoranthene	205-99-2	Prop 65 Cancer

State Right To Know Listing:

<u> </u>					
Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
Acetone	67-64-1	X	Χ	Χ	Χ
benzo (b) fluoranthene	205-99-2	X	X	Χ	Χ

16. OTHER INFORMATION

Prior Version Date: 08/13/18

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical

line in front of the concerned paragraph.

References: No data available

Disclaimer: Restek Corporation provides the descriptions, data and information contained

herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given

and accepted at your risk.



Material Safety Data Sheet

Chrysene, 98%

MSDS# 95251

Section 1 - Chemical Product and Company Identification

MSDS Name: Chrysene, 98%

Catalog Numbers: AC224140000, AC224140010, AC224140050, AC224145000

Synonyms: 1,2-Benzophenanthrene; Benzo(a)phenanthrene; 1,2,5,6-Dibenzonaphthalene.

Acros Organics BVBA

Company Identification: Janssen Pharmaceuticalaan 3a

2440 Geel, Belgium

Acros Organics

Company Identification: (USA)

One Reagent Lane

Fair Lawn, NJ 07410

For information in the US, call:

For information in Europe, call:

Emergency Number, Europe:

Emergency Number US:

201-796-7100

CHEMTREC Phone Number, US: 800-424-9300 CHEMTREC Phone Number, Europe: 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#: 218-01-9 Chemical Name: Chrysene

%: 98

EINECS#: 205-923-4

.____

Hazard Symbols: T



Risk Phrases: 45 50/53

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Caution! May cause respiratory tract irritation. May cause eye and skin irritation. May cause cancer in humans. Target Organs: Liver, skin.

Potential Health Effects

Eye: May cause eye irritation.
Skin: May cause skin irritation.

Ingestion: May cause gastrointestinal irritation with nausea, vomiting and diarrhea.

Inhalation: May cause respiratory tract irritation.

Chronic: May cause cancer according to animal studies.

Section 4 - First Aid Measures

Eyes: Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower

eyelids. Get medical aid.

Get medical aid. Immediately flush skin with plenty of water for at least 15 minutes while removing Skin:

contaminated clothing and shoes. Wash clothing before reuse.

Do not induce vomiting. If victim is conscious and alert, give 2-4 cupfuls of milk or water. Never give Ingestion:

anything by mouth to an unconscious person. Get medical aid immediately.

Get medical aid immediately. Remove from exposure and move to fresh air immediately. If not breathing, Inhalation:

give artificial respiration. If breathing is difficult, give oxygen.

Notes to Physician:

General

Section 5 - Fire Fighting Measures

As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved

or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion. This material in sufficient quantity and reduced particle size is

capable of creating a dust explosion.

Extinguishing Media:

Information:

Use water spray, dry chemical, carbon dioxide, or chemical foam.

Autoignition Not available. Temperature:

Flash Point: Not applicable.

Explosion Not available Limits: Lower:

Explosion Not available Limits: Upper:

NFPA Rating: health: ; flammability: 1; instability: ;

Section 6 - Accidental Release Measures

General

Information:

Use proper personal protective equipment as indicated in Section 8.

Vacuum or sweep up material and place into a suitable disposal container. Clean up spills immediately,

Spills/Leaks:

observing precautions in the Protective Equipment section. Wear a self contained breathing apparatus and appropriate personal protection. (See Exposure Controls, Personal Protection section). Provide ventilation.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Wash thoroughly after handling. Avoid contact with eyes, skin, and clothing. Use

only with adequate ventilation. Avoid breathing dust.

Storage: Store in a tightly closed container. Store in a cool, dry area away from incompatible substances.

Section 8 - Exposure Controls, Personal Protection

Chemical Name	+	+ NIOSH	++ OSHA - Final PELs
Chrysene	0.2 mg/m3 TWA (as benzene soluble aerosol) (listed under Coal tar pitches).	 	0.2 mg/m3 TWA (benzene soluble

OSHA Vacated PELs: Chrysene: 0.2 mg/m3 TWA (benzene soluble fraction) (listed under Coal tar pitches) **Engineering Controls:**

Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use process enclosure, local exhaust ventilation, or other engineering controls to control airborne levels.

Exposure Limits

Personal Protective Equipment

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face Eyes:

protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin: Wear appropriate protective gloves to prevent skin exposure. Clothing: Wear appropriate protective clothing to prevent skin exposure.

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a

Respirators: NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if

irritation or other symptoms are experienced.

Section 9 - Physical and Chemical Properties

Physical State: Solid

Color: very light beige Odor: Not available pH: Not available

Vapor Pressure: Not available Vapor Density: Not available Evaporation Rate: Not available Viscosity: Not available

Boiling Point: 448 deg C @ 760 mm Hg (838.40°F)

Freezing/Melting Point: 250-255 deg C Decomposition Temperature: Not available

Solubility in water: insoluble

Specific Gravity/Density:

Molecular Formula: C18H12 Molecular Weight: 228.29

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.

Conditions to Avoid: Dust generation.

Incompatibilities with Other Materials Not available

Hazardous Decomposition Products Carbon monoxide, carbon dioxide.

Hazardous Polymerization Has not been reported.

Section 11 - Toxicological Information

RTECS#: CAS# 218-01-9: GC0700000

LD50/LC50: RTECS: Not available.

Carcinogenicity: Chrysene - ACGIH: A1 - Confirmed Human Carcinogen (Coal tar pitches). California: carcinogen, initial

date 1/1/90 NTP: Known carcinogen (Coal tar pitches). IARC: Group 1 carcinogen (Coal tar pitches).

Other: See actual entry in RTECS for complete information.

Section 12 - Ecological Information

Ecotoxicity: Water flea LC50 = 1.9 mg/L; 2 Hr.; Unspecified

Section 13 - Disposal Considerations

Dispose of in a manner consistent with federal, state, and local regulations.

Section 14 - Transport Information

US DOT

Shipping Name: Please contact Fisher Scientific for shipping information

Hazard Class: UN Number: Packing Group: Canada TDG

Shipping Name: Not available

Hazard Class: UN Number: Packing Group:

USA RQ: CAS# 218-01-9: 100 lb final RQ; 45.4 kg final RQ

Section 15 - Regulatory Information

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols: T

Risk Phrases:

R 45 May cause cancer.

R 50/53 Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Safety Phrases:

- S 53 Avoid exposure obtain special instructions before use.
- S 45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).
- S 60 This material and its container must be disposed of as hazardous waste.
- S 61 Avoid release to the environment. Refer to special instructions/safety data sheets.

WGK (Water Danger/Protection)

CAS# 218-01-9: Not available

Canada

CAS# 218-01-9 is listed on Canada's DSL List

Canadian WHMIS Classifications: D2A

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

CAS# 218-01-9 is listed on Canada's Ingredient Disclosure List

US Federal

TSCA

CAS# 218-01-9 is listed on the TSCA Inventory.

Section 16 - Other Information

MSDS Creation Date: 6/30/1999 Revision #6 Date 7/20/2009

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantibility or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall the company be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential, or exemplary damages howsoever arising, even if the company has been advised of the possibility of such damages.



Safety Data Sheet Revision Date: 10/02/19

www.restek.com

2 Letter ISO country code/language code: US/EN

1. IDENTIFICATION

Catalog Number / Product Name: 31276 / Dibenzo(a,h)anthracene Standard

Company: **Restek Corporation** Address: 110 Benner Circle Bellefonte, Pa. 16823 Phone#: 814-353-1300 Fax#: 814-353-1309

Emergency#: 800-424-9300 (CHEMTREC) 703-527-3887 (Outside the US)

Email: www.restek.com

Revision Number: 9

Intended use: For Laboratory use only

2. HAZARD(S)IDENTIFICATION

Emergency Overview:



GHS Hazard Symbols:

GHS Carcinogenicity Category 2

Classification:

GHS Signal Warning

Word:

GHS Hazard: Suspected of causing cancer.

GHS

Precautions:

Safety Obtain special instructions before use.

Precautions: Do not handle until all safety precautions have been read and understood.

Wear protective gloves/protective clothing/eye protection/face protection.

First Aid IF exposed or concerned: Get medical advice/attention.

Measures:

Storage: Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

No data available Single

Exposure **Target Organs:**

Repeated No data available

Exposure

Target Organs:

3. COMPOSITION / INFORMATION ON INGREDIENT

Chemical Name	CAS#	EINEC # % Composition	
Dichloromethane	75-09-2	200-838-9	99.9
dibenz (a,h) anthracene	53-70-3	200-181-8	0.1

4. FIRST-AID MEASURES

Inhalation: Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not

breathing, give artificial respiration and have a trained individual administer oxygen. Get

medical attention immediately

Eyes: Immediately flush eyes with plenty of water for at least 20 minutes retracting eyelids often.

Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention and monitor the eye daily as advised by your physician. Serious harm (damage) may result if treatment is delayed. Continue to flush eyes while awaiting medical

attention

Skin Contact: Wash with soap and water. Remove contaminated clothing, launder immediately, and discard

contaminated leather goods. Get medical attention immediately.

Ingestion: Do not induce vomiting and seek medical attention immediately. Drink two glasses of water

or milk to dilute. Provide medical care provider with this SDS. Never give anything by mouth

to an unconscious person

5. FIRE- FIGHTING MEASURES

Extinguishing Media: Use alcohol resistant foam, carbon dioxide, or dry chemical when fighting

fires. Water or foam may cause frothing if liquid is burning but it still may be a useful extinguishing agent if carefully applied to the surface of the fire. Do Not direct a stream of water into the hot burning liquid. Use

methods suitable to fight surrounding fire.

Fire and/or Explosion Hazards: No data.

Fire Fighting Methods and Protection: Use methods for the surrounding fire. **Hazardous Combustion Products:** Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions and Equipment: Exposure to the spilled material may be severely irritating or toxic. Follow

personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including; the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the area responding to the spill. Never exceed any occupational exposure

limits.

Methods for Clean-up: Prevent the spread of any spill to minimize harm to human health and the

environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal

evaluation.

7. HANDLING AND STORAGE

Handling Technical Measures and Precautions: Toxic or severely irritating material. Avoid contacting and avoid

breathing the material. Use only in a well ventilated area. As with all chemicals, good industrial hygiene practices should be

followed when handling this material.

Storage Technical Measures and Conditions: Store in a cool dry place. Isolate from incompatible materials.

Keep container closed when not in use

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

United States: Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure
					Limit
Dichloromethane	75-09-2	2300 ppm IDLH	None Known	50 ppm TWA	25 ppm TWA; 125 ppm STEL (15 min. TWA)
dibenz (a,h) anthracene	53-70-3	Not established	None Known	Not established	No data available

Personal Protection:

Engineering Measures: Local exhaust ventilation or other engineering controls are normally required

when handling or using this product to avoid overexposure.

Respiratory Protection: Respiratory protection may be required to avoid overexposure when handling this

product. General or local exhaust ventilation is the preferred means of protection.

Use a respirator if general room ventilation is not available or sufficient to

eliminate symptoms.

Eye Protection: Wear chemically resistant safety glasses with side shields when handling this

product. Wear additional eye protection such as chemical splash goggles and/or face shield when the possibility exists for eye contact with splashing or spraying liquid, or airborne material. Do not wear contact lenses. Have an eye wash

station available.

Skin Protection: Avoid skin contact by wearing chemically resistant gloves, an apron and other

protective equipment depending upon conditions of use. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and

water before eating, drinking, and when leaving work.

Medical Conditions Aggravated By Exposure: Eye disease Skin disease including eczema and sensitization Respiratory

disease including asthma and bronchitis

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color: Colorless Odor: Strong

Physical State:

pH:

No data available

Not applicable

No data available

Vapor Pressure:

Vapor Density:

Boiling Point (°C):

No data available

2.93 (air = 1)

524 °C Boiling Point

Melting Point (°C): -96.7 °C

Flash Point (°F):

Upper Flammable/Explosive Limit, % in air:

Lower Flammable/Explosive Limit, % in air:

Autoignition Temperature (°C):

Decomposition Temperature (°C):

No data available

556 deg C

No data available

Specific Gravity: 1.3254 - 1.3258 g/cm3 at 20 °C

Evaporation Rate:No data available

Odor Threshold: ND

Solubility: Moderate; 50-99% Partition Coefficient: n-octanol in water: No data available

VOC % by weight: 99.9

Molecular Weight: No data available

10. STABILITY AND REACTIVITY

Stability: Stable under normal conditions.

Conditions to Avoid:

Materials to Avoid / Chemical Incompatiability:
Hazardous Decomposition Products:

None known.Contamination High temperatures Strong oxidizing agents Caustics (bases)
Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry: Inhalation Absorption Ingestion Skin contact Eye

contact

Target Organs Potentially Affected By Exposure: Skin, Cardiovascular System, Eyes, Liver

Chemical Interactions That Change Toxicity: None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation: Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea

and headache.

Inhalation Toxicity: Harmful! Can cause systemic damage (see "Target Organs)Inhalation may

cause severe central nervous system depression (including unconsciousness).

Skin Contact: Contact causes severe skin irritation and possible burns.

Skin Absorption: Harmful if absorbed through the skin. May cause severe irritation and systemic

damage.

Eye Contact: Contact with the eyes may cause moderate to severe eye injury. Eye contact

may result in tearing and reddening, but not likely to permanently injure eye tissue. Temporary vision impairment (cloudy or blurred vision) is possible.

Ingestion Irritation: Irritating to mouth, throat, and stomach. Can cause abdominal discomfort,

nausea, vomiting and diarrhea.

Ingestion Toxicity: Harmful if swallowed. May cause systemic poisoning.

Long-Term (Chronic) Health Effects:

Carcinogenicity: Contains a probable or known human carcinogen.

Reproductive and Developmental Toxicity: No data available to indicate product or any components

present at greater than 0.1% may cause birth defects.

Inhalation:

Upon prolonged and/or repeated exposure, can cause

Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue,

nausea and headache.Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (see

"Target Organs)

Skin Absorption: Upon prolonged or repeated exposure, harmful if

absorbed through the skin. May cause severe irritation

and systemic damage

Component Toxicological Data:

NIOSH:

Chemical Name CAS No. LD50/LC50

Methane, dichloro- 75-09-2 Inhalation LC50 Rat 53 mg/L 6 h

Component Carcinogenic Data:

OSHA:

Chemical Name CAS No.

Dibenzía.hlanthracene 53-70-3

Dibenz[a,h]anthracene 53-70-3 Present
Methylene chloride 75-09-2 25 ppm TWA (8 hr.); 125 ppm STEL (15 min.);

12.5 ppm Action Level (see 29 CFR 1910.1051); effective date for respiratory protection for certain employers to acheive the 8-hour TWA PEL is August 31, 1998; the start up date to install engineering controls is December 10, 1998.; {OSHA - 29 CFR 1910

Specifically Regulate

ACGIH:

Chemical Name CAS No.

Dichloromethane 75-09-2 A3 - Confirmed Animal Carcinogen with

Unknown Relevance to Humans

NIOSH:

Chemical Name CAS No.

Methylene chloride 75-09-2 potential occupational carcinogen

NTP:

Chemical Name CAS No.

No data available

IARC:

 Chemical Name
 CAS No.
 Group No.

 Monograph 92 [2010];
 53-70-3
 Group 2A

Supplement 7 [1987]; Monograph 32 [1983] (overall evaluation upgraded from 2B to 2A with supporting evidence from other

relevant data)

Monograph 110 [in preparation]: 75-09-2 Group 2A

Monograph 71 [1999]

12. ECOLOGICAL INFORMATION

Overview: Moderate ecological hazard. This product may be dangerous

to plants and/or wildlife. Keep out of waterways.

Mobility:No dataPersistence:No dataBioaccumulation:No dataDegradability:No data

Ecological Toxicity Data: No data available

13. DISPOSAL CONSIDERATIONS

Waste Description of Spent Product: Spent or discarded material is a hazardous waste. Mixing

spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous

waste determination on mixtures.

Disposal Methods: Incinerate spent or discarded material a permitted

hazardous waste facility.

Waste Disposal of Packaging: Comply with all Local, State, Federal, and Provincial

Environmental Regulations.

14. TRANSPORTATION INFORMATION

United States:

DOT Proper Shipping Name: Dichloromethane

UN Number: UN1593
Hazard Class: 6.1
Packing Group: III

International:

IATA Proper Shipping Name: Dichloromethane

UN Number: UN1593
Hazard Class: 6.1
Packing Group: III

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

15. REGULATORY INFORMATION

United States: Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA	
Dichloromethane	75-09-2	Χ	Χ	-	Χ	
dibenz (a,h) anthracene	53-70-3	Χ	Χ	-	Χ	

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS#	Regulation
Dibenz[a,h]anthracene	53-70-3	Prop 65 Cancer
Dichloromethane	75-09-2	Prop 65 Cancer
Dichloromethane (Methylene chloride)		

State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
Dichloromethane	75-09-2	X	X	Χ	Χ
dibenz (a.h) anthracene	53-70-3	X	X	Χ	Χ

16. OTHER INFORMATION

Prior Version Date: 06/20/18

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical

line in front of the concerned paragraph.

References: No data available

Disclaimer: Restek Corporation provides the descriptions, data and information contained

herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given

and accepted at your risk.



Safety Data Sheet Revision Date: 06/04/19

www.restek.com

2 Letter ISO country code/language code: US/EN

1. IDENTIFICATION

Catalog Number / Product Name: 31279 / Indeno(1,2,3-c,d)pyrene Standard

Company: **Restek Corporation** Address: 110 Benner Circle Bellefonte, Pa. 16823 Phone#: 814-353-1300 Fax#: 814-353-1309

Emergency#: 800-424-9300 (CHEMTREC) 703-527-3887 (Outside the US)

Email: www.restek.com

Revision Number: 11

Intended use: For Laboratory use only

2. HAZARD(S)IDENTIFICATION

Emergency Overview:



GHS Hazard Symbols:

GHS Carcinogenicity Category 2

Classification:

GHS Signal Warning

Word:

GHS Hazard: Suspected of causing cancer.

GHS

Precautions:

Safety Obtain special instructions before use.

Precautions: Do not handle until all safety precautions have been read and understood. Wear protective gloves/protective clothing/eye protection/face protection.

First Aid IF exposed or concerned: Get medical advice/attention.

Measures:

Storage: Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

No data available Single

Exposure **Target Organs:**

Repeated No data available

Exposure

Target Organs:

3. COMPOSITION / INFORMATION ON INGREDIENT

Chemical Name	CAS#	EINEC #	% Composition
Dichloromethane	75-09-2	200-838-9	99.9
indeno (1,2,3-c,d) pyrene	193-39-5	205-893-2	0.1

4. FIRST-AID MEASURES

Inhalation: Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not

breathing, give artificial respiration and have a trained individual administer oxygen. Get

medical attention immediately

Eyes: Immediately flush eyes with plenty of water for at least 20 minutes retracting eyelids often.

Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention and monitor the eye daily as advised by your physician. Serious harm (damage) may result if treatment is delayed. Continue to flush eyes while awaiting medical

attention

Skin Contact: Wash with soap and water. Remove contaminated clothing, launder immediately, and discard

contaminated leather goods. Get medical attention immediately.

Ingestion: Do not induce vomiting and seek medical attention immediately. Drink two glasses of water

or milk to dilute. Provide medical care provider with this SDS. Never give anything by mouth

to an unconscious person

5. FIRE- FIGHTING MEASURES

Extinguishing Media: Use alcohol resistant foam, carbon dioxide, or dry chemical when fighting

fires. Water or foam may cause frothing if liquid is burning but it still may be a useful extinguishing agent if carefully applied to the surface of the fire. Do Not direct a stream of water into the hot burning liquid. Use

methods suitable to fight surrounding fire.

Fire and/or Explosion Hazards: No data.

Fire Fighting Methods and Protection: Use methods for the surrounding fire. **Hazardous Combustion Products:** Use methods for the surrounding fire. Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions and Equipment: Exposure to the spilled material may be severely irritating or toxic. Follow

personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including; the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the area responding to the spill. Never exceed any occupational exposure

limits.

Methods for Clean-up: Prevent the spread of any spill to minimize harm to human health and the

environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal

evaluation.

7. HANDLING AND STORAGE

Handling Technical Measures and Precautions: Toxic or severely irritating material. Avoid contacting and avoid

breathing the material. Use only in a well ventilated area. As with all chemicals, good industrial hygiene practices should be

followed when handling this material.

Storage Technical Measures and Conditions: Store in a cool dry place. Isolate from incompatible materials.

Keep container closed when not in use

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

United States: Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
Dichloromethane	75-09-2	2300 ppm IDLH	None Known	50 ppm TWA	25 ppm TWA; 125 ppm STEL (15 min. TWA)
indeno (1,2,3-c,d) pyrene	193-39-5	Not established	None Known	Not established	No data available

Personal Protection:

Engineering Measures: Local exhaust ventilation or other engineering controls are normally required

when handling or using this product to avoid overexposure.

Respiratory Protection: Respiratory protection may be required to avoid overexposure when handling this

product. General or local exhaust ventilation is the preferred means of protection.

Use a respirator if general room ventilation is not available or sufficient to

eliminate symptoms.

Eye Protection: Wear chemically resistant safety glasses with side shields when handling this

product. Wear additional eye protection such as chemical splash goggles and/or face shield when the possibility exists for eye contact with splashing or spraying liquid, or airborne material. Do not wear contact lenses. Have an eye wash

station available.

Skin Protection: Avoid skin contact by wearing chemically resistant gloves, an apron and other

protective equipment depending upon conditions of use. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and

water before eating, drinking, and when leaving work.

Medical Conditions Aggravated By Exposure: Eye disease Skin disease including eczema and sensitization Respiratory

disease including asthma and bronchitis

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color: Colorless Odor: Strong

Physical State:

pH:

Vapor Pressure:

Vapor Density:

Boiling Point (°C):

Melting Point (°C):

No data available

2.93 (air = 1)

530 °C

Melting Point (°C):

-96.7 °C

Flash Point (°F):

Upper Flammable/Explosive Limit, % in air:
Lower Flammable/Explosive Limit, % in air:
Autoignition Temperature (°C):

Decomposition Temperature (°C):

No data available
556 deg C
No data available

Specific Gravity: 1.3254 - 1.3258 g/cm3 at 20 °C

Evaporation Rate:No data available

Odor Threshold: ND

Solubility: Moderate; 50-99% Partition Coefficient: n-octanol in water: No data available

VOC % by weight: 99.9

Molecular Weight: No data available

10. STABILITY AND REACTIVITY

Stability: Stable under normal conditions.

Conditions to Avoid:

Materials to Avoid / Chemical Incompatiability:

Hazardous Decomposition Products:

None known.Contamination High temperatures
Strong oxidizing agents Caustics (bases)
Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry: Inhalation Absorption Ingestion Skin contact Eye

contact

Target Organs Potentially Affected By Exposure: Skin, Cardiovascular System, Eyes, Liver

Chemical Interactions That Change Toxicity: None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation: Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea

and headache.

Inhalation Toxicity: Harmful! Can cause systemic damage (see "Target Organs)Inhalation may

cause severe central nervous system depression (including unconsciousness).

Skin Contact: Contact causes severe skin irritation and possible burns.

Skin Absorption: Harmful if absorbed through the skin. May cause severe irritation and systemic

damage.

Eye Contact: Contact with the eyes may cause moderate to severe eye injury. Eye contact

may result in tearing and reddening, but not likely to permanently injure eye tissue. Temporary vision impairment (cloudy or blurred vision) is possible.

Ingestion Irritation: Irritating to mouth, throat, and stomach. Can cause abdominal discomfort,

nausea, vomiting and diarrhea.

Ingestion Toxicity: Harmful if swallowed. May cause systemic poisoning.

Long-Term (Chronic) Health Effects:

Carcinogenicity: Contains a probable or known human carcinogen.

Reproductive and Developmental Toxicity: No data available to indicate product or any components

present at greater than 0.1% may cause birth defects.

Inhalation:

Upon prolonged and/or repeated exposure, can cause

Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue,

nausea and headache.Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (see

"Target Organs)

Skin Absorption: Upon prolonged or repeated exposure, harmful if

absorbed through the skin. May cause severe irritation

and systemic damage

Component Toxicological Data:

NIOSH:

Chemical Name CAS No. LD50/LC50

Methane, dichloro- 75-09-2 Inhalation LC50 Rat 53 mg/L 6 h

Component Carcinogenic Data:

OSHA:

Chemical Name CAS No. Indeno[1,2,3-cd]pyrene 193-39-5

Indeno[1,2,3-cd]pyrene 193-39-5 Present
Methylene chloride 75-09-2 25 ppm TWA (8 hr.); 125 ppm STEL (15 min.);

12.5 ppm Action Level (see 29 CFR 1910.1051); effective date for respiratory protection for certain employers to acheive the 8-hour TWA PEL is August 31, 1998; the start up date to install engineering controls is December 10, 1998.; {OSHA - 29 CFR 1910

Specifically Regulate

ACGIH:

Chemical Name CAS No.

Dichloromethane 75-09-2 A3 - Confirmed Animal Carcinogen with

Unknown Relevance to Humans

NIOSH:

Chemical Name CAS No.

Methylene chloride 75-09-2 potential occupational carcinogen

NTP:

Chemical Name CAS No.

No data available

IARC:

Chemical NameCAS No.Group No.Monograph 110 [in preparation];75-09-2Group 2A

Monograph 71 [1999]

Monograph 92 [2010]; 193-39-5 Group 2B

Supplement 7 [1987]; Monograph

32 [1983]

12. ECOLOGICAL INFORMATION

Overview: Moderate ecological hazard. This product may be dangerous

to plants and/or wildlife. Keep out of waterways.

Mobility: No data
Persistence: No data
Bioaccumulation: No data
Degradability: No data

Ecological Toxicity Data: No data available

13. DISPOSAL CONSIDERATIONS

Waste Description of Spent Product: Spent or discarded material is a hazardous waste. Mixing

spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous

waste determination on mixtures.

Disposal Methods: Incinerate spent or discarded material a permitted

hazardous waste facility.

Waste Disposal of Packaging: Comply with all Local, State, Federal, and Provincial

14. TRANSPORTATION INFORMATION

United States:

DOT Proper Shipping Name:Dichloromethane

UN Number: UN1593
Hazard Class: 6.1
Packing Group: III

International:

IATA Proper Shipping Name: Dichloromethane

UN Number: UN1593
Hazard Class: 6.1
Packing Group: III

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

15. REGULATORY INFORMATION

United States: Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
Dichloromethane	75-09-2	Χ	Χ	-	Χ
indeno (1,2,3-c,d) pyrene	193-39-5	X	Х	-	X

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS#	Regulation
Indeno[1,2,3-cd]pyrene	193-39-5	Prop 65 Cancer
Dichloromethane	75-09-2	Prop 65 Cancer
Dichloromethane (Methylene chloride)		

State Right To Know Listing:

e mare any market and							
Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California		
Dichloromethane	75-09-2	X	Х	Χ	X		
indeno (1,2,3-c,d)	193-39-5	Х	Х	Х	X		
pyrene							

16. OTHER INFORMATION

Prior Version Date: 03/22/18

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical

line in front of the concerned paragraph.

References: No data available

Disclaimer: Restek Corporation provides the descriptions, data and information contained

herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given

and accepted at your risk.



Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Date of issue: 12/15/2014 Revision date: 12/15/2014 Version: 1.1

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product form : Substance
CAS No : 7439-92-1
Formula : Pb

Synonyms : C.I. 77575, in massive state / elemental lead, in massive state / glover, in massive state

BIG no : 10073

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Solder

Battery: component Construction Electrodes

1.3. Details of the supplier of the safety data sheet

GSC International, Inc. 1747 N. Deffer Drive Nixa

MO 65714

United States of America

Tel: 417-374-7431 Fax: 417-374-7442

Email: info@gscinternationalinc.com

1.4. Emergency telephone number

Country	Organization/Company	Address	Emergency number
MEXICO	Servicio de Informacion Toxicologica Sintox	Tintoreto #32 Edif. a Desp. Col. Nochebuena Mixcoac México, D.F.	1 800 009 2800 +52 55 5611 2634 /+52 55 5598 9095
UNITED STATES OF AMERICA	American Association of Poison Control Centers		1-800-222-1222

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

Classification (GHS-US)

Acute Tox. 4 (Oral) H302
Acute Tox. 4 (Inhalation) H332
Carc. 1B H350
Repr. 1A H360
STOT RE 2 H373
Aquatic Acute 1 H400
Aquatic Chronic 1 H410
Full text of H-phrases: see section 16

2.2. Label elements

GHS-US labeling

Hazard pictograms (GHS-US)



GHS07





GHS08

GHS09

Signal word (GHS-US) : Danger

Hazard statements (GHS-US) : H302+H332 - Harmful if swallowed or if inhaled

H350 - May cause cancer

H360 - May damage fertility or the unborn child

H373 - May cause damage to organs through prolonged or repeated exposure

EN (English US) Page 1

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

H400 - Very toxic to aquatic life

H410 - Very toxic to aquatic life with long lasting effects

Precautionary statements (GHS-US) : P201 - Obtain special instructions before use

P202 - Do not handle until all safety precautions have been read and understood

P260 - Do not breathe dust, fume

P264 - Wash hands thoroughly after handling

P270 - Do not eat, drink or smoke when using this product

P273 - Avoid release to the environment

P304+P340 - If inhaled: Remove person to fresh air and keep comfortable for breathing

P308+P313 - If exposed or concerned: Get medical advice/attention

P314 - Get medical advice/attention if you feel unwell

P501 - Dispose of contents/container to a licensed hazardous-waste disposal contractor or collection site except for empty clean containers which can be disposed of as non-hazardous

waste

2.3. Other hazards

No additional information available

2.4. Unknown acute toxicity (GHS-US)

Not applicable

SECTION 3: Composition/information on ingredients

3.1. Substance

Name	Product identifier	%	Classification (GHS-US)
Lead (Main constituent)	(CAS No) 7439-92-1	> 99,9	Acute Tox. 4 (Oral), H302 Acute Tox. 4 (Inhalation), H332 Carc. 1B, H350 Repr. 1A, H360 STOT RE 2, H373 Aquatic Acute 1, H400 Aquatic Chronic 1, H410

Full text of H-phrases: see section 16

3.2. Mixture

Not applicable

4.1. Description of first aid measures

First-aid measures general : If you feel unwell, seek medical advice. IF exposed or concerned: Get medical advice/attention.

Call a poison center/doctor/physician if you feel unwell.

First-aid measures after inhalation : Remove person to fresh air and keep comfortable for breathing. Not applicable. Call a poison

center/doctor/physician if you feel unwell.

First-aid measures after skin contact : Not applicable. Wash skin with plenty of water.

First-aid measures after eye contact : Not applicable. Rinse eyes with water as a precaution.

First-aid measures after ingestion : Not applicable. Rinse mouth. Call a poison center/doctor/physician if you feel unwell.

4.2. Most important symptoms and effects, both acute and delayed

Symptoms/injuries after inhalation : No effects known.

Symptoms/injuries after skin contact : No effects known.

Symptoms/injuries after eye contact : No effects known.

Symptoms/injuries after ingestion : No effects known.

Chronic symptoms : No effects known.

4.3. Indication of any immediate medical attention and special treatment needed

Treat symptomatically.

SECTION 5: Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media : Adapt extinguishing media to the environment.

Unsuitable extinguishing media : No unsuitable extinguishing media known.

5.2. Special hazards arising from the substance or mixture

Fire hazard : DIRECT FIRE HAZARD. Non combustible.

EN (English US) 2/10

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Explosion hazard : DIRECT EXPLOSION HAZARD. No data available on direct explosion hazard. INDIRECT

EXPLOSION HAZARD. No data available on indirect explosion hazard.

Reactivity : On burning: formation of metallic fumes. Oxidizes on exposure to air.

5.3. Advice for firefighters

Precautionary measures fire : Exposure to fire/heat: keep upwind. Exposure to fire/heat: consider evacuation. Exposure to

heat: have neighborhood close doors and windows.

Firefighting instructions : Dilute toxic gases with water spray. Take account of toxic fire-fighting water. Use water

moderately and if possible collect or contain it.

Protection during firefighting : Heat/fire exposure: compressed air/oxygen apparatus. Do not attempt to take action without

suitable protective equipment. Self-contained breathing apparatus. Complete protective

clothing.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

6.1.1. For non-emergency personnel

Protective equipment : Gloves. Protective clothing. See "Material-Handling" to select protective clothing.

Emergency procedures : Mark the danger area. No naked flames.

6.1.2. For emergency responders

Protective equipment : Do not attempt to take action without suitable protective equipment. For further information

refer to section 8: "Exposure controls/personal protection".

6.2. Environmental precautions

Avoid release to the environment. Prevent soil and water pollution. Prevent spreading in sewers. Notify authorities if product enters sewers or public waters.

6.3. Methods and material for containment and cleaning up

For containment : Not applicable. Collect spillage.

Methods for cleaning up : Recover mechanically the product. Pick-up the material. Take collected spill to

manufacturer/competent authority. Notify authorities if product enters sewers or public waters.

Other information : Dispose of materials or solid residues at an authorized site.

6.4. Reference to other sections

For further information refer to section 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling

: Meet the legal requirements. Do not discharge the waste into the drain. Handle unclean empty containers as full ones. Observe strict hygiene. Measure the concentration in the atmosphere. Carry out operations in the open/under local exhaust/ventilation or with respiratory protection. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not breathe dust, fume. Use only outdoors or in a well-ventilated area. Take all necessary technical measures to avoid or minimize the release of the product on the workplace. Limit quantities of product at the minimum necessary for handling and limit the number of exposed workers. Provide local exhaust or general room ventilation. Wear personal protective equipment. Floors, walls and other surfaces in the hazard area must be cleaned

regularly.

Hygiene measures : Separate working clothes from town clothes. Launder separately. Do not eat, drink or smoke

when using this product. Always wash hands after handling the product.

7.2. Conditions for safe storage, including any incompatibilities

Technical measures : Does not require any specific or particular technical measures. Comply with applicable

regulations.

Storage conditions : Store locked up. Store in a well-ventilated place. Keep cool.

Incompatible materials : Strong acids, strong bases and oxidation agents.

Heat-ignition : KEEP SUBSTANCE AWAY FROM: heat sources.

Prohibitions on mixed storage : KEEP SUBSTANCE AWAY FROM: oxidizing agents. Strong acids. Strong bases.

Storage area : Meet the legal requirements.

Special rules on packaging : SPECIAL REQUIREMENTS: closing. correctly labeled. meet the legal requirements. Secure

fragile packaging in solid containers.

EN (English US) 3/10

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

7.3. Specific end use(s)

No additional information available

SECTION 8: Exposure controls/personal protection

8.1. **Control parameters**

Lead (7439-92-1)		
ACGIH	ACGIH TWA (mg/m³)	0,05 mg/m³
ACGIH	Remark (ACGIH)	CNS & PNS impair
OSHA	Not applicable	

8.2. **Exposure controls**

Appropriate engineering controls : Provide adequate general and local exhaust ventilation. Ensure good ventilation of the work

station.

Personal protective equipment : Protective goggles. Gloves.





Materials for protective clothing GIVE EXCELLENT RESISTANCE: No data available. GIVE GOOD RESISTANCE: butyl

rubber. PVC. GIVE LESS RESISTANCE: No data available. GIVE POOR RESISTANCE: No

data available.

Hand protection protective gloves. Eye protection Safety glasses.

Skin and body protection : Not required for normal conditions of use.

Respiratory protection Wear respiratory protection. Environmental exposure controls Avoid release to the environment.

SECTION 9: Physical and chemical properties

Information on basic physical and chemical properties 9.1.

: Solid Physical state Appearance : Metal. Molecular mass : 207,20 g/mol White to blue-grey Color

Odorless Odor

Odor threshold : No data available : No data available рΗ Relative evaporation rate (butyl acetate=1) : No data available

Melting point : 327 °C : No data available

Freezing point

Boiling point : 1740 °C Flash point : Not applicable Auto-ignition temperature : No data available Decomposition temperature : No data available : No data available Flammability (solid, gas)

Vapor pressure : < 0,1 hPa Relative vapor density at 20 °C : No data available

Relative density : 11,3

Specific gravity / density : 11340 kg/m³

Solubility insoluble in water. Substance sinks in water. Soluble in nitric acid. Insoluble in organic solvents.

Water: < 0,1 g/100ml

Log Pow : 0,73 (Estimated value) Log Kow : No data available

> EN (English US) 4/10

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Viscosity, kinematic : Not applicable
Viscosity, dynamic : No data available
Explosive properties : No data available
Oxidizing properties : No data available
Explosive limits : No data available

9.2. Other information

VOC content : Not applicable (inorganic)

SECTION 10: Stability and reactivity

10.1. Reactivity

On burning: formation of metallic fumes. Oxidizes on exposure to air.

10.2. Chemical stability

Unstable on exposure to air.

10.3. Possibility of hazardous reactions

No additional information available

10.4. Conditions to avoid

No additional information available

10.5. Incompatible materials

Acids. Bases.

10.6. Hazardous decomposition products

Thermal decomposition generates: fume.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Oral: Harmful if swallowed. Inhalation: Harmful if inhaled.

Lead (\f)7439-92-1	
LD50 oral rat	> 2000 mg/kg body weight (Rat; Weight of evidence)
LD50 dermal rat	> 2000 mg/kg body weight (Rat; Experimental value; OECD 402: Acute Dermal Toxicity)
ATE US (oral)	500,000 mg/kg body weight
ATE US (gases)	4500,000 ppmV/4h
ATE US (vapors)	11,000 mg/l/4h
ATE US (dust, mist)	1,500 mg/l/4h
Additional information	Lead massive metal is not considered to be acutely toxic. It is not easily inhaled or ingested, and if it is accidentally ingested normally passes through the gastrointestinal system without significant absorption into the body. Lead is not easily absorbed through the skin.

Skin corrosion/irritation : Not classified

(Based on available data, the classification criteria are not met)

Serious eye damage/irritation : Not classified

(Based on available data, the classification criteria are not met)

Respiratory or skin sensitization : Not classified

(Based on available data, the classification criteria are not met)

Germ cell mutagenicity : Not classified

(Based on available data, the classification criteria are not met)

Carcinogenicity : May cause cancer.

EN (English US) 5/10

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Lead (7439-92-1)		
Additional information	There is some evidence that inorganic lead compounds may have a carcinogenic effect, and they have been classified by IARC as probably carcinogenic to humans. However, it is considered that this classification does not apply to lead in articles, given the very low bioavailability of metallic lead. Carcinogenicity studies of lead metal powder have been negative. Epidemiology studies of workers exposed to inorganic lead compounds have found a limited association with stomach cancer. IARC has concluded that lead metal is possibly carcinogenic to humans (Group aB).	
IARC group	2B - Possibly carcinogenic to humans	
National Toxicology Program (NTP) Status	3 - Reasonably anticipated to be Human Carcinogen	

Reproductive toxicity : May damage fertility or the unborn child.

Specific target organ toxicity (single exposure) : Not classified

(Based on available data, the classification criteria are not met)

Specific target organ toxicity (repeated

exposure)

: May cause damage to organs through prolonged or repeated exposure.

Lead (7439-92-1)	
Additional information	Lead is a cumulative poison and may be absorbed into the body through ingestion or inhalation. Although inhalation and ingestion of lead in massive form are unlikely, poor hygiene practises may result in hand to mouth transfer which maybe significant over a prolonged period of time. Inorganic lead compounds have been documented in observational human studies to produce toxicity in multiple organ systems and body function including the haemotopoetic (blood) system, kidney function, reproductive function and the central nervous system.
Aspiration hazard	: Not classified

(Based on available data, the classification criteria are not met)

Symptoms/injuries after inhalation : No effects known. Symptoms/injuries after skin contact : No effects known. Symptoms/injuries after eye contact : No effects known. Symptoms/injuries after ingestion : No effects known. Chronic symptoms : No effects known.

SECTION 12: Ecological information

12.1.	Toxicity	

Ecology - general	: Dangerous for the environment. Very toxic to aquatic life with long lasting effects.
Ecology - air	: Not dangerous for the ozone layer (Regulation (EC) No 1005/2009). Not included in the list of fluorinated greenhouse gases (Regulation (EC) No 842/2006). TA-Luft Klasse 5.2.2/II.
Ecology - water	No water pollutant (surface water). Maximum concentration in drinking water: 0.010 mg/l (lead).

No water pollutant (surface water). Maximum concentration in drinking water: 0.010 mg/l (lead) Ecology - water (Directive 98/83/EC). Highly toxic to aquatic organisms.

Lead (7439-92-1)	
LC50 fish 1	2,8 (0,44 - 542) mg/l (96h) Coughlan, D.J., S.P. Gloss, and J. Kubota 1986. Acute and Sub-Chronic Toxicity of Lead to the Early Life Stages of Small mouth Bass (Micropterus dolomieui). Water Air Soil Pollut. 28(3/4):265-275
EC50 Daphnia 1	4,46 (0,53 - 5,1) mg/l (48h) Govindarajan, S., C.P. Valsaraj, R. Mohan, V. Hariprasad, and R. Ramasubramanian 1993. Toxicity of Heavy Metals in Aquaculture Organisms: Penaeus indicus, Perna viridis, Artemia salina and Skeletonema costatum. Pollut.Res. 12(3):187-189

12.2. Persistence and degradability

Lead (7439-92-1)		
Persistence and degradability	Biodegradability: Not applicable. No (test)data available on mobility of the substance.	
ThOD	Not applicable (inorganic)	

12.3. **Bioaccumulative potential**

Lead (7439-92-1)	
Log Pow	0,73 (Estimated value)
Bioaccumulative potential	Low bioaccumulation potential (Log Kow < 4).

Mobility in soil

No additional information available

EN (English US) 6/10

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Other adverse effects 12.5.

Effect on ozone layer

SECTION 13: Disposal considerations

Waste treatment methods

Waste disposal recommendations

: Dispose in a safe manner in accordance with local/national regulations. Hazardous waste shall not be mixed together with other waste. Different types of hazardous waste shall not be mixed together if this may entail a risk of pollution or create problems for the further management of the waste. Hazardous waste shall be managed responsibly. All entities that store, transport or handle hazardous waste shall take the necessary measures to prevent risks of pollution or damage to people or animals. Reuse or recycle following decontamination. Remove to an authorized dump (Class I). Do not discharge into surface water (2000/60/EC, Council decision 2455/2001/EC, O.J. L331 of 15/12/2001).

Additional information LWCA (the Netherlands): KGA category 05. Hazardous waste according to Directive

2008/98/EC.

SECTION 14: Transport information

In accordance with DOT

Transport document description : UN3077 Environmentally hazardous substances, solid, n.o.s. Lead(7439-92-1), 9, III

UN-No.(DOT) : UN3077

Proper Shipping Name (DOT) Environmentally hazardous substances, solid, n.o.s.

Lead(7439-92-1)

Department of Transportation (DOT) Hazard

Classes

: 9 - Class 9 - Miscellaneous hazardous material 49 CFR 173.140

Hazard labels (DOT) : 9 - Class 9 (Miscellaneous dangerous materials)



DOT Symbols : G - Identifies PSN requiring a technical name

Packing group (DOT) : III - Minor Danger

> EN (English US) 7/10

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

DOT Special Provisions (49 CFR 172.102)

- : 8 A hazardous substance that is not a hazardous waste may be shipped under the shipping description "Other regulated substances, liquid or solid, n.o.s.", as appropriate. In addition, for solid materials, special provision B54 applies.
 - 146 This description may be used for a material that poses a hazard to the environment but does not meet the definition for a hazardous waste or a hazardous substance, as defined in 171.8 of this subchapter, or any hazard class as defined in Part 173 of this subchapter, if it is designated as environmentally hazardous by the Competent Authority of the country of origin, transit or destination.
 - 335 Mixtures of solids that are not subject to this subchapter and environmentally hazardous liquids or solids may be classified as "Environmentally hazardous substances, solid, n.o.s," UN3077 and may be transported under this entry, provided there is no free liquid visible at the time the material is loaded or at the time the packaging or transport unit is closed. Each transport unit must be leak-proof when used as bulk packaging.

A112 - Notwithstanding the quantity limits shown in Column (9A) and (9B) for this entry, the following IBCs are authorized for transportation aboard passenger and cargo-only aircraft. Each IBC may not exceed a maximum net quantity of 1,000 kg:

- a. Metal: 11A, 11B, 11N, 21A, 21B and 21N
- b. Rigid plastics: 11H1, 11H2, 21H1 and 21H2
- c. Composite with plastic inner receptacle: 11HZ1, 11HZ2, 21HZ1 and 21HZ2
- d. Fiberboard: 11G
- e. Wooden: 11C, 11D and 11F (with inner liners)
- f. Flexible: 13H2, 13H3, 13H4, 13H5, 13L2, 13L3, 13L4, 13M1 and 13M2 (flexible IBCs must be sift-proof and water resistant or must be fitted with a sift-proof and water resistant liner). B54 Open-top, sift-proof rail cars are also authorized.
- IB8 Authorized IBCs: Metal (11A, 11B, 11N, 21A, 21B, 21N, 31A, 31B and 31N); Rigid plastics (11H1, 11H2, 21H1, 21H2, 31H1 and 31H2); Composite (11HZ1, 11HZ2, 21HZ1, 21HZ2, 31HZ1 and 31HZ2); Fiberboard (11G); Wooden (11C, 11D and 11F); Flexible (13H1, 13H2, 13H3, 13H4, 13H5, 13L1, 13L2, 13L3, 13L4, 13M1 or 13M2).
- IP3 Flexible IBCs must be sift-proof and water-resistant or must be fitted with a sift-proof and water-resistant liner.

N20 - A 5M1 multi-wall paper bag is authorized if transported in a closed transport vehicle. T1 - 1.5 178.274(d)(2) Normal...... 178.275(d)(2)

TP33 - The portable tank instruction assigned for this substance applies for granular and powdered solids and for solids which are filled and discharged at temperatures above their melting point which are cooled and transported as a solid mass. Solid substances transported or offered for transport above their melting point are authorized for transportation in portable tanks conforming to the provisions of portable tank instruction T4 for solid substances of packing group III or T7 for solid substances of packing group II, unless a tank with more stringent requirements for minimum shell thickness, maximum allowable working pressure, pressure-relief devices or bottom outlets are assigned in which case the more stringent tank instruction and special provisions shall apply. Filling limits must be in accordance with portable tank special provision TP3. Solids meeting the definition of an elevated temperature material must be transported in accordance with the applicable requirements of this subchapter.

DOT Packaging Exceptions (49 CFR 173.xxx) : 155

DOT Packaging Non Bulk (49 CFR 173.xxx) : 213

DOT Packaging Bulk (49 CFR 173.xxx) : 240

DOT Quantity Limitations Passenger aircraft/rail : No limit

(49 CFR 173.27)

DOT Quantity Limitations Cargo aircraft only (49 : No limit

CFR 175.75)

DOT Vessel Stowage Location : A - The material may be stowed "on deck" or "under deck" on a cargo vessel and on a

passenger vessel.

Additional information

Other information : No supplementary information available.

ADR

No additional information available

Transport by sea

UN-No. (IMDG) : 3077

Proper Shipping Name (IMDG) : ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.

Class (IMDG) : 9 - Miscellaneous dangerous compounds
Packing group (IMDG) : III - substances presenting low danger

EN (English US) 8/10

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Air transport

UN-No.(IATA) : 3077

Proper Shipping Name (IATA) : Environmentally hazardous substance, solid, n.o.s.

Class (IATA) : 9 - Miscellaneous Dangerous Goods

Packing group (IATA) : III - Minor Danger

SECTION 15: Regulatory information

15.1. US Federal regulations

Lead (7439-92-1)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

Listed on United States SARA Section 313 Not listed on the United States SARA Section 313

Not listed on the officed states salva section 515

RQ (Reportable quantity, section 304 of EPA's List of Lists) 10 lb

15.2. International regulations

CANADA

No additional information available

EU-Regulations

No additional information available

Classification according to Regulation (EC) No. 1272/2008 [CLP]

Repr. 1A H360Df
Acute Tox. 4 (Inhalation) H332
Acute Tox. 4 (Oral) H302
STOT RE 2 H373
Aquatic Acute 1 H400
Aquatic Chronic 1 H410
Full text of H-phrases: see section 16

Classification according to Directive 67/548/EEC [DSD] or 1999/45/EC [DPD]

Repr.Cat.1; R61 Repr.Cat.3; R62 Xn; R20/22 R33 N; R50/53

Full text of R-phrases: see section 16

15.2.2. National regulations

Lead (7439-92-1)

Listed on IARC (International Agency for Research on Cancer) Listed as carcinogen on NTP (National Toxicology Program)

15.3. US State regulations

No additional information available

SECTION 16: Other information

Revision date : 12/15/2014

EN (English US) 9/10

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Full text of H-phrases:

Acute Tox. 4 (Inhalation)	Acute toxicity (inhalation) Category 4
Acute Tox. 4 (Oral)	Acute toxicity (oral) Category 4
Aquatic Acute 1	Hazardous to the aquatic environment - Acute Hazard Category 1
Aquatic Chronic 1	Hazardous to the aquatic environment - Chronic Hazard Category 1
Carc. 1B	Carcinogenicity Category 1B
Repr. 1A	Reproductive toxicity Category 1A
STOT RE 2	Specific target organ toxicity (repeated exposure) Category 2
H302	Harmful if swallowed
H332	Harmful if inhaled
H350	May cause cancer
H360	May damage fertility or the unborn child
H373	May cause damage to organs through prolonged or repeated
	exposure
H400	Very toxic to aquatic life
H410	Very toxic to aquatic life with long lasting effects

NFPA health hazard : 2 - Intense or continued exposure could cause temporary


incapacitation or possible residual injury unless prompt

medical attention is given.

NFPA fire hazard : 0 - Materials that will not burn.

NFPA reactivity : 0 - Normally stable, even under fire exposure conditions,

and are not reactive with water.



HMIS III Rating

Health : * Chronic Hazard - Chronic (long-term) health effects may result from repeated overexposure

Flammability : 0 Minimal Hazard Physical : 0 Minimal Hazard

Personal Protection : B

SDS US (GHS HazCom 2012)

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product

EN (English US) 10/10



SAFETY DATA SHEET

Creation Date 20-Aug-2014 Revision Date 17-Jan-2018 Revision Number 3

1. Identification

Product Name Mercury (Certified ACS)

Cat No.: M141-1LB; M141-6LB

Synonyms Colloidal mercury; Hydrargyrum; Metallic mercury

Recommended Use Laboratory chemicals.

Uses advised against

Not for food, drug, pesticide or biocidal product use

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Corrosive to metals

Acute Inhalation Toxicity - Vapors

Reproductive Toxicity

Specific target organ toxicity - (repeated exposure)

Category 1

Category 1

Category 1

Target Organs - Central nervous system (CNS), Kidney.

Label Elements

Signal Word

Danger

Hazard Statements

May be corrosive to metals

Fatal if inhaled

May damage the unborn child

Causes damage to organs through prolonged or repeated exposure



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Do not get in eyes, on skin, or on clothing

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Do not breathe dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Wear respiratory protection

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Immediately call a POISON CENTER or doctor/physician

Skin

Immediately call a POISON CENTER or doctor/physician

IF ON SKIN: Gently wash with plenty of soap and water

Remove/Take off immediately all contaminated clothing

Wash contaminated clothing before reuse

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

WARNING. Reproductive Harm - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Mercury	7439-97-6	100

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.

Immediate medical attention is required.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

clothes and shoes. Immediate medical attention is required.

Inhalation Move to fresh air. If breathing is difficult, give oxygen. Do not use mouth-to-mouth method if

victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Immediate

medical attention is required.

Ingestion Do not induce vomiting. Call a physician or Poison Control Center immediately.

Most important symptoms and

effects

No information available.

Notes to Physician Treat symptomatically

Fire-fighting measures

Substance is nonflammable; use agent most appropriate to extinguish surrounding fire. **Suitable Extinguishing Media**

Unsuitable Extinguishing Media No information available

Flash Point No information available Method -No information available

Autoignition Temperature

Explosion Limits

No information available

No data available Upper No data available Lower Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Very toxic. Non-combustible, substance itself does not burn but may decompose upon heating to produce corrosive and/or toxic fumes. Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Mercury oxide Highly toxic fumes

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Up

Health	Flammability	Instability	Physical hazards
4	0	0	N/A

6. Accidental release measures

Personal Precautions

Wear self-contained breathing apparatus and protective suit. Evacuate personnel to safe areas. Ensure adequate ventilation. Do not get in eyes, on skin, or on clothing. Should not be released into the environment. See Section 12 for additional ecological information.

Environmental Precautions

Methods for Containment and Clean Wear self-contained breathing apparatus and protective suit. Soak up with inert absorbent material. Keep in suitable, closed containers for disposal.

7. Handling and storage

Use only under a chemical fume hood. Wear personal protective equipment. Do not get in Handling

eyes, on skin, or on clothing. Do not breathe vapors or spray mist. Do not ingest.

Keep containers tightly closed in a dry, cool and well-ventilated place. Corrosives area. Storage

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Mercury	TWA: 0.025 mg/m ³	(Vacated) TWA: 0.05 mg/m ³	IDLH: 10 mg/m ³	TWA: 0.05 mg/m ³
	Skin	Ceiling: 0.1 mg/m ³	TWA: 0.05 mg/m ³	
		(Vacated) STEL: 0.03 mg/m ³	Ceiling: 0.1 mg/m ³	
		Skin		
		(Vacated) Ceiling: 0.1 mg/m ³		

Mercury (Certified ACS)

Revision Date 17-Jan-2018

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures Use only under a chemical fume hood. Ensure adequate ventilation, especially in confined

areas. Ensure that eyewash stations and safety showers are close to the workstation

location.

Personal Protective Equipment

Eye/face ProtectionWear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateLiquidAppearanceSilverOdorOdorless

Odor ThresholdNo information availablepHNo information availableMelting Point/Range-38.87 °C / -38 °FBoiling Point/Range356.72 °C / 674.1 °FFlash PointNo information availableEvaporation RateNo information available

Flammability (solid,gas)

No information available

Flammability or explosive limits

UpperNo data availableLowerNo data availableVapor Pressure0.002 mmHg @ 25 °C

Vapor Density 7.0

Specific Gravity
13.59 (H2O=1)
Solubility
Insoluble in water
Partition coefficient: n-octanol/water
No data available

Autoignition TemperatureNo information availableDecomposition TemperatureNo information availableViscosityNo information available

Molecular Formula Hg
Molecular Weight 200.59

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products. Excess heat.

Incompatible Materials Strong oxidizing agents, Ammonia, Metals, Halogens

Mercury (Certified ACS)

Revision Date 17-Jan-2018

Hazardous Decomposition Products Mercury oxide, Highly toxic fumes

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

Toxicological information

Acute Toxicity

Product Information

No acute toxicity information is available for this product

Component Information Toxicologically Synergistic

No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Mercury	7439-97-6	Not listed				

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects May cause harm to the unborn child.

Teratogenicity No information available.

STOT - single exposure

None known

STOT - repeated exposure Central nervous system (CNS) Kidney

Aspiration hazard No information available

Symptoms / effects,both acute and No information available

delayed

Endocrine Disruptor Information No information available

The toxicological properties have not been fully investigated. Other Adverse Effects

12. Ecological information

Ecotoxicity

This product contains the following substance(s) which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Mercury	Not listed	0.9 mg/L LC50 96h	Not listed	EC50: = 5.0 μg/L, 96h
•		0.18 mg/L LC50 96h		(water flea)
		0.16 mg/L LC50 96h		, ,
		0.5 mg/L LC50 96h		

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

No information available. Mobility

13. Disposal considerations

Revision Date 17-Jan-2018

Mercury (Certified ACS)

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Mercury - 7439-97-6	U151	-

14. Transport information

DOT

UN-No UN2809 Proper Shipping Name MERCURY

Hazard Class 8
Subsidiary Hazard Class 6.1
Packing Group III

<u>TDG</u>

UN-No UN2809
Proper Shipping Name MERCURY

Hazard Class 8
Subsidiary Hazard Class 6.1
Packing Group III

IATA

UN-No UN2809
Proper Shipping Name MERCURY

Hazard Class 8
Subsidiary Hazard Class 6.1
Packing Group III

IMDG/IMO

UN-No UN2809
Proper Shipping Name MERCURY

Hazard Class 8
Subsidiary Hazard Class 6.1
Packing Group III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Mercury	Х	Χ	-	231-106-7	-		Χ	-	Χ	Χ	Χ

Legend:

- X Listed
- E Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.
- F Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
- N Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
- P Indicates a commenced PMN substance
- R Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
- S Indicates a substance that is identified in a proposed or final Significant New Use Rule
- T Indicates a substance that is the subject of a Section 4 test rule under TSCA.
- XU Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).
- Y1 Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.
- Y2 Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b)

Component	TSCA 12(b)
Mercury	Section 5

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Mercury	7439-97-6	100	1.0

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Mercury	-	-	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Mercury	X		-

OSHA Occupational Safety and Health Administration Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Mercury	1 lb	-

California Proposition 65

This product contains the following proposition 65 chemicals

Comp	onent	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Mer	ury	7439-97-6	Developmental	-	Developmental

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Mercury	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

	16. Other information
D	D d - t A # - i

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 20-Aug-2014

 Revision Date
 17-Jan-2018

 Print Date
 17-Jan-2018

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Mercury (Certified ACS)

Revision Date 17-Jan-2018

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

SAFETY DATA SHEET



Trichloroethylene

Section 1. Identification

GHS product identifier

: Trichloroethylene : trichloroethylene

Chemical name Other means of

identification

: trichloroethene; Ethene, 1,1,2-trichloro-; Ethene, trichloro-; Trichlorethylene; Ethylene,

trichloro-

Product use

: Synthetic/Analytical chemistry.

Synonym

: trichloroethene; Ethene, 1,1,2-trichloro-; Ethene, trichloro-; Trichlorethylene; Ethylene,

trichloro-

SDS#

: 001206

Supplier's details

: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road

Suite 100

Radnor, PA 19087-5283

1-610-687-5253

24-hour telephone

: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status

: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture : SKIN CORROSION/IRRITATION - Category 2 SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A

GERM CELL MUTAGENICITY - Category 2

CARCINOGENICITY - Category 1

AQUATIC HAZARD (LONG-TERM) - Category 3

GHS label elements

Hazard pictograms





Signal word

Hazard statements

: Causes serious eye irritation. Causes skin irritation.

May cause cancer.

Suspected of causing genetic defects.

Harmful to aquatic life with long lasting effects.

Precautionary statements

General

: Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention

: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Avoid release to the environment. Wash hands thoroughly after handling.

Response

: IF exposed or concerned: Get medical attention. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

Storage

: Store locked up.

Disposal

: Dispose of contents and container in accordance with all local, regional, national and international regulations.

Date of issue/Date of revision : 11/21/2016 1/12 Date of previous issue Version: 0.01 : No previous validation

Trichloroethylene

Section 2. Hazards identification

Hazards not otherwise

: None known.

classified

Section 3. Composition/information on ingredients

Substance/mixture

: Substance

Chemical name

: trichloroethylene

Other means of identification

: trichloroethene; Ethene, 1,1,2-trichloro-; Ethene, trichloro-; Trichlorethylene; Ethylene,

trichloro-

CAS number/other identifiers

CAS number : 79-01-6 **Product code** : 001206

Ingredient name	%	CAS number
trichloroethylene	100	79-01-6

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact

: Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.

Inhalation

: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.

Skin contact

: Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.

Ingestion

: Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : Causes serious eye irritation.

Inhalation : No known significant effects or critical hazards.

: Causes skin irritation. **Skin contact**

Frostbite : Try to warm up the frozen tissues and seek medical attention.

Ingestion : No known significant effects or critical hazards.

Date of issue/Date of revision : 11/21/2016 Version: 0.01 2/12 Date of previous issue : No previous validation

Trichloroethylene

Section 4. First aid measures

Over-exposure signs/symptoms

Eye contact: Adverse symptoms may include the following:, pain or irritation, watering, redness

Inhalation : No specific data.

Skin contact: Adverse symptoms may include the following:, irritation, redness

Ingestion: No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician : In case of inhalation of decomposition products in a fire, symptoms may be delayed.

The exposed person may need to be kept under medical surveillance for 48 hours.

Specific treatments : No specific treatment.

Protection of first-aiders : No action shall be taken involving any personal risk or without suitable training. If it is

suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water

before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing

media

Unsuitable extinguishing

media

: Use an extinguishing agent suitable for the surrounding fire.

: None known.

Specific hazards arising from the chemical

: In a fire or if heated, a pressure increase will occur and the container may burst. This material is harmful to aquatic life with long lasting effects. Fire water contaminated with this material must be contained and prevented from being discharged to any waterway, sewer or drain.

Hazardous thermal decomposition products

: Decomposition products may include the following materials:

carbon dioxide carbon monoxide

halogenated compounds

carbonyl halides

Special protective actions for fire-fighters

: Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable

training.

Special protective equipment for fire-fighters

: Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel

: No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders

: If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Date of issue/Date of revision : 11/21/2016 Date of previous issue : No previous validation Version : 0.01 3/12

Section 6. Accidental release measures

Environmental precautions

: Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air). Water polluting material. May be harmful to the environment if released in large quantities.

Methods and materials for containment and cleaning up

Small spill

: Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill

: Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures

: Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapor or mist. Avoid release to the environment. If during normal use the material presents a respiratory hazard, use only with adequate ventilation or wear appropriate respirator. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.

Advice on general occupational hygiene

Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities

: Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

trichloroethylene

ACGIH TLV (United States, 3/2016).

STEL: 25 ppm 15 minutes. TWA: 10 ppm 8 hours.

OSHA PEL 1989 (United States, 3/1989).

STEL: 1080 mg/m³ 15 minutes. STEL: 200 ppm 15 minutes. TWA: 270 mg/m³ 8 hours. TWA: 50 ppm 8 hours.

OSHA PEL Z2 (United States, 2/2013).

AMP: 300 ppm 5 minutes.

CEIL: 200 ppm

TWA: 100 ppm 8 hours.

Date of issue/Date of revision : 11/21/2016 Date of previous issue : No previous validation Version : 0.01 4/12

Section 8. Exposure controls/personal protection

Appropriate engineering controls

: If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures

: Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period.

Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection

Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Other skin protection

: Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection

: Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

Physical state : Liquid. [Watery liquid.]

Color : Colorless.

Molecular weight : 131.38 g/mole

Molecular formula : C2-H-Cl3

Boiling/condensation point : 86.7°C (188.1°F)

Melting/freezing point : -84.8°C (-120.6°F)

Critical temperature : Not available.

Odor : Characteristic.
Odor threshold : Not available.
pH : Not available.
Flash point : Not available.
Burning time : Not applicable.
Burning rate : Not applicable.

Evaporation rate : 6.39 (butyl acetate = 1)

Flammability (solid, gas) : Not available.

Date of issue/Date of revision: 11/21/2016Date of previous issue: No previous validationVersion: 0.015/12

Trichloroethylene

Section 9. Physical and chemical properties

Lower and upper explosive

(flammable) limits

: Lower: 8% Upper: 10.5%

Vapor pressure

: 9.9 kPa (74.256033302 mm Hg) [room temperature]

Vapor density

: 4.5 (Air = 1)

Specific Volume (ft 3/lb) Gas Density (lb/ft 3)

0.6849

1.46

Relative density

: 1.5

Solubility

: Not available.

Solubility in water

: 1.1 g/l

Partition coefficient: n-

2.53

octanol/water

Auto-ignition temperature

: 410°C (770°F)

Decomposition temperature: Not available.

SADT Viscosity

: Not available. : Dynamic (room temperature): 0.58 mPa·s (0.58 cP)

Section 10. Stability and reactivity

Reactivity

: No specific test data related to reactivity available for this product or its ingredients.

Chemical stability

: The product is stable.

Possibility of hazardous

reactions

: Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid

: No specific data.

Incompatible materials

: No specific data.

Hazardous decomposition

products

: Under normal conditions of storage and use, hazardous decomposition products should

not be produced.

Hazardous polymerization : Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
trichloroethylene	LC50 Inhalation Vapor	Rat	140700 mg/m³	1 hours
	LD50 Dermal	Rabbit	>20 g/kg	-
	LD50 Oral	Rat	4920 mg/kg	-

IDLH : 1000 ppm

Irritation/Corrosion

Product/ingredient name	Result	Species	Score	Exposure	Observation
trichloroethylene	Eyes - Moderate irritant	Rabbit	-	24 hours 20 milligrams	-
	Skin - Severe irritant	Rabbit	-	24 hours 2 milligrams	-

Sensitization

Not available.

Date of issue/Date of revision 6/12 : 11/21/2016 Version: 0.01 Date of previous issue : No previous validation

Section 11. Toxicological information

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

Product/ingredient name	OSHA	IARC	NTP
trichloroethylene	-	1	Reasonably anticipated to be a human carcinogen.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely

routes of exposure

: Not available.

Potential acute health effects

Eye contact : Causes serious eye irritation.

Inhalation : No known significant effects or critical hazards.

Skin contact : Causes skin irritation.

Ingestion: No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : Adverse symptoms may include the following:, pain or irritation, watering, redness

Inhalation : No specific data.

Skin contact: Adverse symptoms may include the following:, irritation, redness

Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate : Not available.

effects

Potential delayed effects : Not available.

Long term exposure

Potential immediate : Not available.

effects

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity: May cause cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : Suspected of causing genetic defects.

Date of issue/Date of revision : 11/21/2016 Date of previous issue : No previous validation Version : 0.01 7/12

Trichloroethylene

Section 11. Toxicological information

Teratogenicity

Developmental effects

: No known significant effects or critical hazards.

Developmental effectsNo known significant effects or critical hazards.Fertility effectsNo known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Product/ingredient name	Result	Species	Exposure
trichloroethylene	Acute EC50 95000 µg/l Marine water Acute EC50 36.5 mg/l Fresh water	Algae - Skeletonema costatum Algae - Chlamydomonas reinhardtii - Exponential growth phase	96 hours 72 hours
	Acute LC50 20 mg/l Marine water Acute LC50 18 mg/l Fresh water Acute LC50 3100 µg/l Fresh water	Crustaceans - Elminius modestus Daphnia - Daphnia magna Fish - Jordanella floridae - Juvenile (Fledgling, Hatchling, Weanling)	48 hours 48 hours 96 hours
	Chronic EC10 12.3 mg/l Fresh water	Algae - Chlamydomonas reinhardtii - Exponential growth phase	72 hours
	Chronic NOEC 10 mg/l Fresh water	Daphnia - Daphnia magna	21 days

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogPow	BCF	Potential
trichloroethylene	2.53	17	low

Mobility in soil

Soil/water partition coefficient (Koc)

: Not available.

Other adverse effects

: No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods

: The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Date of issue/Date of revision : 11/21/2016 Date of previous issue : No previous validation Version : 0.01 8/12

Trichloroethylene

Section 13. Disposal considerations

United States - RCRA Toxic hazardous waste "U" List

Ingredient	CAS#		Reference number
Trichloroethylene; Ethene, trichloro-	79-01-6	Listed	U228

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1710	UN1710	UN1710	UN1710	UN1710
UN proper shipping name	TRICHLOROETHYLENE	TRICHLOROETHYLENE	TRICHLOROETHYLENE	TRICHLOROETHYLENE	TRICHLOROETHYLENE
Transport hazard class(es)	6.1	6.1	6.1	6.1	6.1
Packing group	III	III	III	III	III
Environment	No.	No.	No.	No.	No.
Additional information	Reportable quantity 100 lbs / 45.4 kg [8. 2147 gal / 31.096 L] Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements. Limited quantity Yes. Packaging instruction Passenger aircraft Quantity limitation: 60 L Cargo aircraft Quantity limitation: 220 L Special provisions IB3, N36, T4, TP1, T1	Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.26-2.36 (Class 6). Explosive Limit and Limited Quantity Index 5			Passenger and Cargo AircraftQuantity Iimitation: 60 L Cargo Aircraft Only Quantity limitation: 220 L Limited Quantities - Passenger Aircraft Quantity limitation: 2 L

[&]quot;Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product."

Special precautions for user : Transport within user's premises: always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according : Not available. to Annex II of MARPOL

Date of issue/Date of revision : 11/21/2016 Version : 0.01 9/12 Date of previous issue : No previous validation

73/78 and the IBC Code

Section 15. Regulatory information

U.S. Federal regulations

: TSCA 5(a)2 final significant new use rules: trichloroethylene

TSCA 8(a) CDR Exempt/Partial exemption: Not determined

TSCA 12(b) one-time export: trichloroethylene

United States inventory (TSCA 8b): This material is listed or exempted.

Clean Water Act (CWA) 307: trichloroethylene Clean Water Act (CWA) 311: trichloroethylene

Clean Air Act Section 112

(b) Hazardous Air **Pollutants (HAPs)**

: Listed

Clean Air Act Section 602

Class I Substances

: Not listed

Clean Air Act Section 602

Class II Substances

: Not listed

DEA List I Chemicals

: Not listed

(Precursor Chemicals)

DEA List II Chemicals

(Essential Chemicals)

: Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Immediate (acute) health hazard

Delayed (chronic) health hazard

Composition/information on ingredients

Name	%	hazard	Sudden release of pressure		(acute)	Delayed (chronic) health hazard
trichloroethylene	100	No.	No.	No.	Yes.	Yes.

SARA 313

	Product name	CAS number	%
Form R - Reporting requirements	trichloroethylene	79-01-6	100
Supplier notification	trichloroethylene	79-01-6	100

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : This material is listed. **New York** : This material is listed. **New Jersey** : This material is listed. : This material is listed. Pennsylvania

California Prop. 65

WARNING: This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

Date of issue/Date of revision 10/12 : 11/21/2016 Date of previous issue Version: 0.01 : No previous validation

Trichloroethylene

Section 15. Regulatory information

Ingredient name	Cancer	•		Maximum acceptable dosage level
trichloroethylene	Yes.		14 μg/day (ingestion) 50 μg/day (inhalation)	No.

International regulations

International lists

National inventory

Australia : This material is listed or exempted.

Canada : This material is listed or exempted.

China : This material is listed or exempted.

Europe : This material is listed or exempted.

Japan : This material is listed or exempted.

Malaysia : This material is listed or exempted.

New Zealand : This material is listed or exempted.

Philippines : This material is listed or exempted.

Republic of Korea : This material is listed or exempted.

Taiwan : This material is listed or exempted.

Canada

WHMIS (Canada) : Class D-1B: Material causing immediate and serious toxic effects (Toxic).

Class D-2A: Material causing other toxic effects (Very toxic). Class D-2B: Material causing other toxic effects (Toxic).

CEPA Toxic substances: This material is listed. **Canadian ARET**: This material is not listed. **Canadian NPRI**: This material is listed.

Alberta Designated Substances: This material is not listed.

Ontario Designated Substances: This material is not listed.

Quebec Designated Substances: This material is not listed.

Section 16. Other information

Canada Label requirements : Class D-1B: Material causing immediate and serious toxic effects (Toxic).

Class D-2A: Material causing other toxic effects (Very toxic). Class D-2B: Material causing other toxic effects (Toxic).

Hazardous Material Information System (U.S.A.)



Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks Although HMIS® ratings are not required on SDSs under 29 CFR 1910. 1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Trichloroethylene

Section 16. Other information

Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

Classification	Justification
Skin Irrit. 2, H315	Expert judgment
Eye Irrit. 2A, H319	Expert judgment
Muta. 2, H341	Expert judgment
Carc. 1, H350	Expert judgment
Aquatic Chronic 3, H412	Expert judgment

History

Date of printing
Date of issue/Date of

revision

: 11/21/2016

: 11/21/2016

Date of previous issue

: No previous validation

Version

0.01

Key to abbreviations

: ATE = Acute Toxicity Estimate BCF = Bioconcentration Factor

GHS = Globally Harmonized System of Classification and Labelling of Chemicals

IATA = International Air Transport Association

IBC = Intermediate Bulk Container

IMDG = International Maritime Dangerous Goods

LogPow = logarithm of the octanol/water partition coefficient

MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships,

1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)

UN = United Nations

References

: Not available.

▼ Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Date of issue/Date of revision : 11/21/2016 Date of previous issue : No previous validation Version : 0.01 12/12

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 1 of 8

Zinc Metal Mossy, Reagent

SECTION 1: Identification of the substance/mixture and of the supplier

Product name: Zinc Metal Mossy, Reagent

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: S25636A

Recommended uses of the product and restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific, Inc 9 Barnhart Drive, Hanover, PA 17331 (717) 632-1291

Supplier Details:

Fisher Science Education 6771 Silver Crest Road, Nazareth, PA 18064 (724)517-1954

Emergency telephone number:

Fisher Science Education

Emergency Telephone No.: 800-535-5053

SECTION 2: Hazards identification

Classification of the substance or mixture:



Corrosive

Serious eye damage, category 1



Irritant

Acute toxicity (oral, dermal, inhalation), category 4



Environmentally Damaging

Acute hazards to the aquatic environment, category 1 Chronic hazards to the aquatic environment, category 1

Eye Damage 1.
Acute Toxicity 4 (oral).
Aquatic Acute Toxicity 1.
Aquatic Chronic Toxicity 1.

Signal word: Danger

Hazard statements:

Causes serious eye damage.

Harmful if swallowed.

Very toxic to aquatic life.

Very toxic to aquatic life with long lasting effects.

Precautionary statements:

If medical advice is needed, have product container or label at hand.

Keep out of reach of children.

Read label before use.

Do not eat, drink or smoke when using this product.

Effective date: 10.24.2014 Page 2 of 8

Zinc Metal Mossy, Reagent

Wear protective gloves/protective clothing/eye protection/face protection.

Wash skin thoroughly after handling.

Avoid release to the environment.

Rinse mouth.


IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell.


IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing.

Immediately call a POISON CENTER or doctor/physician.

Dispose of contents and container as instructed in Section 13.

Other Non-GHS Classification:







HMIS RATINGS (0-4)

SECTION 3: Composition/information on ingredients

Ingredients:		
CAS 7446-20-0	Zinc sulfate heptahydrate	100 %
	Pero	entages are by weight

SECTION 4: First aid measures

Description of first aid measures

After inhalation:

Loosen clothing as necessary and position individual in a comfortable position. Move exposed to fresh air. Give artificial respiration if necessary. If breathing is difficult give oxygen. Get medical assistance if cough or other symptoms appear.

After skin contact:

Rinse/flush exposed skin gently using soap and water for 15-20 minutes. Seek medical advice if discomfort or irritation persists.

After eye contact:

Protect unexposed eye. Rinse/flush exposed eye(s) gently using water for 15-20 minutes. Remove contact lens(es) if able to do so during rinsing. Seek medical attention if irritation persists or if concerned.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 3 of 8

Zinc Metal Mossy, Reagent

After swallowing:

Rinse mouth thoroughly. Do not induce vomiting. Seek medical attention if irritation, discomfort, or vomiting persists. Never give anything by mouth to an unconscious person.

Most important symptoms and effects, both acute and delayed:

Irritation- all routes of exposure. Inhalation of fumes may cause metal fume fever, which is characterized by flulike symptoms with metallic taste, fever, chills, cough, weakness, chest pain, muscle pain and increased white blood cell count. Headache. Nausea. Shortness of breath. May cause bronchitis.

Indication of any immediate medical attention and special treatment needed:

If seeking medical attention provide SDS document to physician. Physician should treat symptomatically.

SECTION 5: Firefighting measures

Extinguishing media

Suitable extinguishing agents:

Use agent most suitable for extinguishing surrounding fire. Use water spray to keep fire-exposed containers cool.

Unsuitable extinguishing agents:

None identified.

Special hazards arising from the substance or mixture:

Thermal decomposition can lead to release of irritating gases and vapors. Containers may explode in the heat of a fire.

Advice for firefighters:

Protective equipment:

Wear protective eyeware, gloves, and clothing. Refer to Section 8. Use NIOSH-approved respiratory protection/breathing apparatus.

Additional information (precautions):

Avoid inhaling gases, fumes, dust, mist, vapor, and aerosols. Avoid contact with skin, eyes, and clothing.

SECTION 6: Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Ensure adequate ventilation. Ensure that air-handling systems are operational.

Environmental precautions:

Should not be released into environment. Prevent from reaching drains, sewer, or waterway.

Methods and material for containment and cleaning up:

Wear protective eyeware, gloves, and clothing. Refer to Section 8. Always obey local regulations. Containerize for disposal. Refer to Section 13. Sweep up and containerize for disposal. Avoid generating dust. If necessary use trained response staff or contractor. Evacuate personnel to safe areas. Keep in suitable closed containers for disposal.

Reference to other sections: None

SECTION 7: Handling and storage

Precautions for safe handling:

Avoid contact with skin, eyes, and clothing. Follow good hygiene procedures when handling chemical materials. Refer to Section 8. Follow proper disposal methods. Refer to Section 13. Do not eat, drink, smoke, or use personal products when handling chemical substances.

Conditions for safe storage, including any incompatibilities:

Store in a cool location. Keep away from food and beverages. Protect from freezing and physical damage.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 4 of 8

Zinc Metal Mossy, Reagent

Provide ventilation for containers. Keep container tightly sealed. Store away from incompatible materials.

SECTION 8: Exposure controls/personal protection





Control Parameters: 7446-20-0, Zinc, ACGIH TLV: NA, OSHA PEL: NA.

Appropriate Engineering controls: Emergency eye wash fountains and safety showers should be available in

the immediate vicinity of use or handling. Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor and mists below the applicable workplace exposure limits (Occupational

Exposure Limits-OELs) indicated above.

Respiratory protection: Not required under normal conditions of use. Where risk assessment

shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. When necessary use NIOSH approved

breathing equipment.

Protection of skin: Select glove material impermeable and resistant to the substance. Select

glove material based on rates of diffusion and degradation. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Use proper glove removal technique without touching outer surface. Avoid skin contact with used gloves. Wear

protective clothing.

Eye protection: Wear equipment for eye protection tested and approved under

appropriate government standards such as NIOSH (US) or EN 166(EU).

Safety glasses or goggles are appropriate eye protection.

General hygienic measures: Perform routine housekeeping. Wash hands before breaks and at the end

of work. Avoid contact with skin, eyes, and clothing. Before wearing wash

contaminated clothing.

SECTION 9: Physical and chemical properties

Appearance (physical state, color):	Gray solid	Explosion limit lower: Explosion limit upper:	Not determined Not determined
Odor:	Odorless	Vapor pressure at 20°C:	1 mmHg @ 487C
Odor threshold:	Not determined	Vapor density:	Not determined
pH-value:	Not determined	Relative density:	Not determined
Melting/Freezing point:	419C	Solubilities:	Reacts with water.
Boiling point/Boiling range:	908C	Partition coefficient (noctanol/water):	Not determined
Flash point (closed cup):	INAT APTERMINEA	Auto/Self-ignition temperature:	460C
Evaporation rate:	Not determined	Decomposition temperature:	Not determined
Flammability (solid, gaseous):	Not determined	Viscosity:	a. Kinematic: Not determined b. Dynamic: Not determined
Density at 20°C:	7.14 g/cm3 at 20 °C Specific Gravity: :7	.14	

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 5 of 8

Zinc Metal Mossy, Reagent

SECTION 10: Stability and reactivity

Reactivity:

Nonreactive under normal conditions. Reacts with water.

Chemical stability:

Stable under normal conditions.

Possible hazardous reactions:

None under normal processing.

Conditions to avoid:

Incompatible materials. Excess heat.

Incompatible materials:

Oxidizing agents. Strong acids or bases.

Hazardous decomposition products:

Zinc oxides.

SECTION 11: Toxicological information

Acute Toxicity: No additional information.
Chronic Toxicity: No additional information.
Corrosion Irritation: No additional information.
Sensitization: No additional information.

Numerical Measures: No additional information.

Carcinogenicity:

EPA: IRIS Carcinogenicity Assessment- D (data are inadequate for an assessment of human carcinogenic potential; inadequate information to assess carcinogenic potential) Zinc

Mutagenicity: No additional information.

Reproductive Toxicity:

Reproductive effects shown in laboratory animals.

SECTION 12: Ecological information

Ecotoxicity:

Fish (acute 7440-66-6): : 96 Hr LC50 Pimephales promelas: 2.16 - 3.05 mg/L [flow-through]; 96 Hr LC50 Pimephales promelas: 0.211 - 0.269 mg/L [semi-static]; 96 Hr LC50 Pimephales promelas: 2.66 mg/L [static]; 96 Hr LC50 Cyprinus carpio: 30 mg/L; 96 Hr LC50 Cyprinus carpio: 0.45 mg/L [semi-static]; 96 Hr LC50 Cyprinus carpio: 7.8 mg/L [static]; 96 Hr LC50 Lepomis macrochirus: 3.5 mg/L [static]; 96 Hr LC50 Oncorhynchus mykiss: 0.24 mg/L [flow-through]; 96 Hr LC50 Oncorhynchus mykiss: 0.59 mg/L [semi-static]; 96 Hr LC50 Oncorhynchus mykiss: 0.41 mg/L [static]

Crustacea (acute 7440-66-6): : 48 Hr EC50 Daphnia magna: 0.139 - 0.908 mg/L [Static]

Algae (acute 7440-66-6): 96 Hr EC50 Pseudokirchneriella subcapitata: 0.11 - 0.271 mg/L [static]; 72 Hr EC50 Pseudokirchneriella subcapitata: 0.09 - 0.125 mg/L [static]

Persistence and degradability: No additional information. **Bioaccumulative potential**: No additional information.

Mobility in soil: No additional information.

Other adverse effects: No additional information.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 6 of 8

Zinc Metal Mossy, Reagent

SECTION 13: Disposal considerations

Waste disposal recommendations:

Contact a licensed professional waste disposal service to dispose of this material. Dispose of empty containers as unused product. Product or containers must not be disposed with household garbage. It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11). Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations. Ensure complete and accurate classification.

SECTION 14: Transport information

US DOT

UN Number:

ADR, ADN, DOT, IMDG, IATA

Not Regulated.

Limited Quantity Exception:

Bulk:

RQ (if applicable): None

Proper shipping Name: Not Regulated.

Hazard Class: None

Packing Group: Not Regulated.

Marine Pollutant (if applicable): No

additional information. **Comments:** None

Non Bulk:

None

RQ (if applicable): None

Proper shipping Name: Not Regulated.

Hazard Class: None

Packing Group: Not Regulated.

Marine Pollutant (if applicable): No

additional information. **Comments:** None

SECTION 15: Regulatory information

United States (USA)

SARA Section 311/312 (Specific toxic chemical listings):

None of the ingredients are listed.

SARA Section 313 (Specific toxic chemical listings):

7440-66-6 Zinc Compounds (N982).

RCRA (hazardous waste code):

7440-66-6 Zinc [Phase 4 LDR Rule - Universal Treatment Standards 2.61 mg/L (wastewater); 4.3 mg/L TCLP (nonwastewater)].

TSCA (Toxic Substances Control Act):

All ingredients are listed.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

7440-66-6 Zinc 1000 lb final RQ (no reporting of releases of this hazardous substance is required if the diameter of the pieces of the solid metal released is &qt;100 µm).

Proposition 65 (California):

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 7 of 8

Zinc Metal Mossy, Reagent

Chemicals known to cause cancer:

None of the ingredients are listed.

Chemicals known to cause reproductive toxicity for females:

None of the ingredients are listed.

Chemicals known to cause reproductive toxicity for males:

None of the ingredients are listed.

Chemicals known to cause developmental toxicity:

None of the ingredients are listed.

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

None of the ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 1%):

None of the ingredients are listed.

SECTION 16: Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations. Note. The responsibility to provide a safe workplace remains with the user. The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment. The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material. It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases: None

Abbreviations and Acronyms:

IMDG International Maritime Code for Dangerous Goods.

IATA International Air Transport Association.

GHS Globally Harmonized System of Classification and Labelling of Chemicals.

ACGIH American Conference of Governmental Industrial Hygienists.

CAS Chemical Abstracts Service (division of the American Chemical Society).

NFPA National Fire Protection Association (USA).

HMIS Hazardous Materials Identification System (USA).

WHMIS Workplace Hazardous Materials Information System (Canada).

DNEL Derived No-Effect Level (REACH).

PNEC Predicted No-Effect Concentration (REACH).

CFR Code of Federal Regulations (USA).

SARA Superfund Amendments and Reauthorization Act (USA).

RCRA Resource Conservation and Recovery Act (USA).

TSCA Toxic Substances Control Act (USA).

NPRI National Pollutant Release Inventory (Canada).

DOT US Department of Transportation.

Safety Data Sheet according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 10.24.2014 Page 8 of 8

Zinc Metal Mossy, Reagent

Effective date: 10.24.2014 **Last updated**: 06.19.2015



SAFETY DATA SHEET

Version 6.2 Revision Date 10/02/2020 Print Date 08/23/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : 2-Methylphenol

Product Number : 442361

Brand : Supelco

Index-No. : 604-004-00-9

CAS-No. : 95-48-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone #: 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301 Acute toxicity, Dermal (Category 3), H311 Skin corrosion (Category 1B), H314 Serious eye damage (Category 1), H318

Short-term (acute) aquatic hazard (Category 2), H401 Long-term (chronic) aquatic hazard (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Supelco - 442361 Page 1 of 10



Signal word	Danger
Hazard statement(s) H301 + H311 H314 H318 H411	Toxic if swallowed or in contact with skin. Causes severe skin burns and eye damage. Causes serious eye damage. Toxic to aquatic life with long lasting effects.
Precautionary statement(s) P260 P264 P270	Do not breathe dusts or mists. Wash skin thoroughly after handling. Do not eat, drink or smoke when using this product.
P273 P280	Avoid release to the environment. Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P301 + P330 + P331	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/ doctor.
P305 + P351 + P338 +	IF IN EYES: Rinse cautiously with water for several minutes.
P310	Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/ doctor.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : o-Cresol

2-Methylphenol

Formula : C7H8O

Molecular weight : 108.14 g/mol

CAS-No. : 95-48-7

EC-No. : 202-423-8

Index-No. : 604-004-00-9

Component	Classification	Concentration
o-cresol		
	Acute Tox. 3; Skin Corr. 1B; Eye Dam. 1; Aquatic Acute 2; Aquatic Chronic 2; H301, H311, H314, H318, H401, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

Supelco - 442361 Page 2 of 10



SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Consult a physician. Show this material safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Take off contaminated clothing and shoes immediately. Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician. Continue rinsing eyes during transport to hospital.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

Supelco - 442361 Page 3 of 10



6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs. Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature. Air and light sensitive. Keep in a dry place. Storage class (TRGS 510): 6.1B: Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Ingredients with workplace control parameters				
Component	CAS-No.	Value	Control parameters	Basis
o-cresol	95-48-7	TWA	2.3 ppm	USA. NIOSH Recommended
			10 mg/m3	Exposure Limits
		TWA	5 ppm	USA. Occupational Exposure
			22 mg/m3	Limits (OSHA) - Table Z-1
			_	Limits for Air Contaminants
	Remarks	Skin designation		
		The value in mg/m3 is approximate.		
		TWA	20 mg/m3	USA. ACGIH Threshold Limit
			J.	Values (TLV)
		Upper Respiratory Tract irritation		
		Not classifiable as a human carcinogen		
		Danger of cutaneous absorption		

Supelco - 442361 Page 4 of 10



PEL	5 ppm 22 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
Skin		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm Break through time: 30 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail

sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the EC approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Supelco - 442361 Page 5 of 10



Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

SECTION 9: Physical and chemical properties

0.1 Information on basic physical and chemical properties

a) Appearance Form: powder

Color: white

b) Odorc) Odor Thresholddata availableNo data available

d) pH 4.5 at 25.00000 g/l

e) Melting point/range: 29 - 31 °C (84 - 88 °F) - lit.

point/freezing point

f) Initial boiling point 191 °C 376 °F - lit. and boiling range

g) Flash point 81.0 °C (177.8 °F) - closed cup

h) Evaporation rate No data availablei) Flammability (solid, No data available

gas)

k) Vapor pressure 3.1 hPa at $60.0 \, ^{\circ}\text{C} \, (140.0 \, ^{\circ}\text{F})$

1.3 hPa at 38.2 °C(100.8 °F) 0.4 hPa at 20.0 °C(68.0 °F)

I) Vapor density No data available

m) Relative density 1.05 g/cm3 at 20.00 °C (68.00 °F)

n) Water solubility 25 g/l at 20 °C (68 °F)

o) Partition coefficient: No data available

n-octanol/water

p) Autoignition 599.0 °C (1110.2 °F)

temperature

q) Decomposition No data available

temperature

r) Viscosity No data available

s) Explosive properties No data available

t) Oxidizing properties No data available

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides Other decomposition products - No data available

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 121.0 mg/kg

Remarks: Behavioral:Convulsions or effect on seizure threshold. Lungs, Thorax, or

Respiration: Dyspnea. Gastrointestinal: Ulceration or bleeding from stomach.

LC50 Inhalation - Rat - 1 h - > 1,220 mg/m³

Remarks: Sense Organs and Special Senses (Nose, Eye, Ear, and Taste): Eye: Lacrimation.

Behavioral: Somnolence (general depressed activity).

LD50 Dermal - Rabbit - 890.0 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Severe skin irritation - 24 h

(Draize Test)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Severe eye irritation

(Draize Test)

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

Supelco - 442361 Page 7 of 10

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: GO6300000

Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, Central nervous system depression, Diarrhea, Gastrointestinal disturbance

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence Stomach - Irregularities - Based on Human Evidence

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC50 - Leuciscus idus (Golden orfe) - 10.00 mg/l - 96 h

Toxicity to daphnia and other aquatic

Immobilization EC50 - Daphnia magna (Water flea) - 15.8 mg/l - 48

a otilei aquatic

invertebrates

Toxicity to algae EC50 - SELENASTRUM - 100.00 mg/l - 72 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

No data available

Supelco - 442361 Page 8 of 10



SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

DOT (US)

UN number: 3455 Class: 6.1 (8) Packing group: II

Proper shipping name: Cresols, solid Reportable Quantity (RQ): 100 lbs Reportable Quantity (RQ): 100 lbs Poison Inhalation Hazard: No

IMDG

UN number: 3455 Class: 6.1 (8) Packing group: II EMS-No: F-A, S-B

Proper shipping name: CRESOLS, SOLID

IATA

UN number: 3455 Class: 6.1 (8) Packing group: II

Proper shipping name: Cresols, solid

SECTION 15: Regulatory information

SARA 302 Components

The following components are subject to reporting levels established by SARA Title III, Section 302:

o-cresol CAS-No. Revision Date 95-48-7 2007-03-01

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

o-cresol CAS-No. Revision Date 95-48-7 2007-03-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Reportable Quantity D023 lbs

Supelco - 442361 Page 9 of 10

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

o-cresol CAS-No. Revision Date 95-48-7 2007-03-01

SECTION 16: Other information

Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.2 Revision Date: 10/02/2020 Print Date: 08/23/2021

Supelco - 442361 Page 10 of 10





SAFETY DATA SHEET

Version 8.4 Revision Date 02/25/2021 Print Date 08/21/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : 3-Methylphenol

Product Number : 442391

Brand : Supelco

Index-No. : 604-004-00-9

CAS-No. : 108-39-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone #: 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 4), H227 Acute toxicity, Oral (Category 3), H301 Acute toxicity, Dermal (Category 3), H311 Skin corrosion (Category 1B), H314 Serious eye damage (Category 1), H318

Short-term (acute) aquatic hazard (Category 2), H401 Long-term (chronic) aquatic hazard (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram

Supelco - 442391



Signal word	Danger
Hazard statement(s) H227 H301 + H311 H314 H401 H412	Combustible liquid. Toxic if swallowed or in contact with skin. Causes severe skin burns and eye damage. Toxic to aquatic life. Harmful to aquatic life with long lasting effects.
Precautionary statement(s)	
P210	Keep away from heat/ sparks/ open flames/ hot surfaces. No smoking.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P301 + P330 + P331	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/ doctor.
P305 + P351 + P338 + P310	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/ doctor.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : m-Cresol

3-Methylphenol

Formula : C₇H₈O

Molecular weight : 108.14 g/mol CAS-No. : 108-39-4 EC-No. : 203-577-9 Index-No. : 604-004-00-9

Component	Classification	Concentration
meta-Cresol		
	Flam. Liq. 4; Acute Tox. 3;	<= 100 %
	Skin Corr. 1B; Eye Dam.	



1; Aquatic Acute 2; Aquatic Chronic 3; H227, H301, H311, H314, H318,	
H401, H412	

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

First aider needs to protect himself. Show this material safety data sheet to the doctor in attendance.

If inhaled

After inhalation: fresh air. Call in physician.

In case of skin contact

In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower. Call a physician immediately.

In case of eye contact

After eye contact: rinse out with plenty of water. Immediately call in ophthalmologist. Remove contact lenses.

If swallowed

If swallowed: give water to drink (two glasses at most). Seek medical advice immediately. In exceptional cases only, if medical care is not available within one hour, induce vomiting (only in persons who are wide awake and fully conscious), administer activated charcoal (20 - 40 g in a 10% slurry) and consult a doctor as quickly as possible. Do not attempt to neutralise.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Water Foam Carbon dioxide (CO2) Dry powder

Unsuitable extinguishing media

For this substance/mixture no limitations of extinguishing agents are given.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Combustible.

Vapors are heavier than air and may spread along floors.

Forms explosive mixtures with air on intense heating.

Development of hazardous combustion gases or vapours possible in the event of fire.

Supelco - 442391



5.3 Advice for firefighters

Stay in danger area only with self-contained breathing apparatus. Prevent skin contact by keeping a safe distance or by wearing suitable protective clothing.

5.4 Further information

Remove container from danger zone and cool with water. Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Advice for non-emergency personnel: Do not breathe vapors, aerosols. Avoid substance contact. Ensure adequate ventilation. Keep away from heat and sources of ignition. Evacuate the danger area, observe emergency procedures, consult an expert. For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up carefully with liquid-absorbent material (e.g. Chemizorb®). Dispose of properly. Clean up affected area.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on protection against fire and explosion

Keep away from open flames, hot surfaces and sources of ignition. Take precautionary measures against static discharge.

Hygiene measures

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Tightly closed. Keep in a well-ventilated place. Keep locked up or in an area accessible only to qualified or authorized persons.

Storage class (TRGS 510): 6.1A: Combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated



SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
meta-Cresol	108-39-4	TWA	2.3 ppm 10 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5 ppm 22 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	Skin designation		
		TWA	20 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Not classifiable as a human carcinogen		
		Danger of cutaneous absorption		
		PEL	5 ppm 22 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		·

8.2 Exposure controls

Appropriate engineering controls

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU). Tightly fitting safety goggles

Skin protection

This recommendation applies only to the product stated in the safety data sheet, supplied by us and for the designated use. When dissolving in or mixing with other substances and under conditions deviating from those stated in EN374 please contact the supplier of CE-approved gloves (e.g. KCL GmbH, D-36124 Eichenzell, Internet: www.kcl.de).

Full contact

Material: Chloroprene

Minimum layer thickness: 0.65 mm Break through time: 480 min

Material tested: KCL 720 Camapren®

This recommendation applies only to the product stated in the safety data sheet, supplied by us and for the designated use. When dissolving in or mixing with other substances and under conditions deviating from those stated in EN374 please contact the supplier of CE-approved gloves (e.g. KCL GmbH, D-36124 Eichenzell,

Internet: www.kcl.de).

Splash contact

Material: Latex gloves

Minimum layer thickness: 0.6 mm Break through time: 60 min



Supelco - 442391

Material tested:Lapren® (KCL 706 / Aldrich Z677558, Size M)

Body Protection

protective clothing

Respiratory protection

required when vapours/aerosols are generated. Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection system.

Control of environmental exposure

Do not let product enter drains.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a) Appearance Form: liquid

Color: colorless, light yellow

b) Odor phenol-like

c) Odor Threshold No data availabled) pH No data available

e) Melting point/range: 8 - 10 °C (46 - 50 °F) - lit. point/freezing point

f) Initial boiling point and boiling range

203 °C 397 °F - lit.

g) Flash point 86 °C (187 °F) - closed cup

h) Evaporation rate No data availablei) Flammability (solid, No data available gas)

k) Vapor pressure < 1 hPa at 20 °C (68 °F)

I) Vapor density 3.73 - (Air = 1.0)m) Relative density 1.03 at 20 °C (68 °F) n) Water solubility 22.7 g/l at 25 °C (77 °F)

o) Partition coefficient: log Pow: 1.96 - Bioaccumulation is not expected. n-octanol/water

p) Autoignition 559 °C (1038 °F) at 1,013 hPa temperature

q) Decomposition No data available temperature

r) Viscosity No data availables) Explosive properties No data availablet) Oxidizing properties No data available



Supelco - 442391

9.2 Other safety information

Dissociation constant 10.09 at 25 °C (77 °F)

Relative vapor 3.73 - (Air = 1.0)

density

SECTION 10: Stability and reactivity

10.1 Reactivity

Forms explosive mixtures with air on intense heating.

A range from approx. 15 Kelvin below the flash point is to be rated as critical.

10.2 Chemical stability

The product is chemically stable under standard ambient conditions (room temperature).

10.3 Possibility of hazardous reactions

Violent reactions possible with:

Strong oxidizing agents

Nitric acid

fuming sulfuric acid

chlorosulfonic acid

alkalines

10.4 Conditions to avoid

Strong heating.

10.5 Incompatible materials

bronze, brass, Iron, Lead

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - male - 242 mg/kg

(OECD Test Guideline 401)

Symptoms: If ingested, severe burns of the mouth and throat, as well as a danger of

perforation of the esophagus and the stomach.

Inhalation: No data available

Symptoms: mucosal irritations, Cough, Shortness of breath, Possible damages:, damage of

respiratory tract

Inhalation: Corrosive to respiratory system.

LD50 Dermal - Rabbit - 620 mg/kg

Remarks:

Behavioral: Somnolence (general depressed activity).

Behavioral:Tetany.

(RTECS)

No data available



Skin corrosion/irritation

Skin - Rabbit

Result: Causes burns. - 24 h

Remarks: (ECHA)

Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

Serious eye damage/eye irritation

Causes serious eye damage.

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

Ames test

Escherichia coli/Salmonella typhimurium

Result: negative

Mutagenicity (mammal cell test): chromosome aberration.

Chinese hamster lung cells

Result: positive

In vitro mammalian cell gene mutation test

mouse lymphoma cells

Result: negative

OECD Test Guideline 475

Mouse - male and female - Bone marrow

Result: negative

Carcinogenicity

IARC: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

No data available

Acute oral toxicity - If ingested, severe burns of the mouth and throat, as well as a danger of perforation of the esophagus and the stomach.

Acute inhalation toxicity - mucosal irritations, Cough, Shortness of breath, Possible damages:, damage of respiratory tract

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

11.2 Additional Information

Repeated dose toxicity - Rat - male - Oral - 13 Weeks - NOAEL (No observed adverse effect

level) - 50 mg/kg RTECS: GO6125000

Supelco - 442391

Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., Cough, Shortness of breath, Headache, Nausea To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

After absorption:

Systemic effects:

Headache Nausea Vomiting Dizziness agitation, spasms

agitation, spasms respiratory arrest Unconsciousness

Damage to:

Central nervous system Liver Kidney

This substance should be handled with particular care.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish static test LC50 - Salvelinus fontinalis - 7.6 mg/l - 96 h

Remarks: (ECHA)

static test LC50 - Oncorhynchus mykiss (rainbow trout) - 8.6 mg/l -

96 h

Remarks: (ECHA)

static test LC50 - Salmo trutta (brown trout) - 8.4 mg/l - 96 h

Remarks: (ECHA)

Toxicity to daphnia and other aquatic invertebrates

flow-through test EC50 - Daphnia pulicaria - > 99.5 mg/l - 48 h

(US-EPA)

12.2 Persistence and degradability

Biodegradability aerobic - Exposure time 10 d

Result: 96 % - Inherently biodegradable.

(OECD Test Guideline 302B)

Supelco - 442391

Millipore

12.3 Bioaccumulative potential

Bioaccumulation Leuciscus idus (Golden orfe) - 3 d

- 0.05 mg/l(meta-Cresol)

Bioconcentration factor (BCF): 17 - 20

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

Biological effects:

Hazard for drinking water supplies.

Change in the flavour characteristics of fish protein.

Discharge into the environment must be avoided.

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Waste material must be disposed of in accordance with the national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself. See www.retrologistik.com for processes regarding the return of chemicals and containers, or contact us there if you have further questions.

SECTION 14: Transport information

DOT (US)

UN number: 2076 Class: 6.1 (8) Packing group: II

Proper shipping name: Cresols, liquid Reportable Quantity (RQ): 100 lbs Reportable Quantity (RQ): 100 lbs Poison Inhalation Hazard: No

Poison innaiation Hazaru: N

IMDG

UN number: 2076 Class: 6.1 (8) Packing group: II EMS-No: F-A, S-B

Proper shipping name: CRESOLS, LIQUID

IATA

UN number: 2076 Class: 6.1 (8) Packing group: II

Proper shipping name: Cresols, liquid

SECTION 15: Regulatory information

SARA 302 Components

This material does not contain any components with a section 302 EHS TPQ.

SARA 313 Components

Supelco - 442391

MILLIPORE IGMA The following components are subject to reporting levels established by SARA Title III, Section 313:

meta-Cresol CAS-No. Revision Date 2007-03-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Reportable Quantity D024 lbs

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

SECTION 16: Other information

Further information

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 8.4 Revision Date: 02/25/2021 Print Date: 08/21/2021





SAFETY DATA SHEET

Version 6.2 Revision Date 09/30/2020 Print Date 08/21/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : 4-Methylphenol

Product Number : 442418

Brand : Supelco

Index-No. : 604-004-00-9

CAS-No. : 106-44-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone #: 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301 Acute toxicity, Dermal (Category 3), H311

Skin corrosion (Category 1B), H314 Serious eye damage (Category 1), H318

Short-term (acute) aquatic hazard (Category 2), H401 Long-term (chronic) aquatic hazard (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Supelco - 442418 Page 1 of 11



Signal word	Danger
Hazard statement(s) H301 + H311 H314 H318 H411	Toxic if swallowed or in contact with skin. Causes severe skin burns and eye damage. Causes serious eye damage. Toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P260	Do not breathe dusts or mists.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273 P280	Avoid release to the environment.
P200	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor.
. 551 516 556	Rinse mouth.
P301 + P330 + P331	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all
	contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P310	IF INHALED: Remove victim to fresh air and keep at rest in a
	position comfortable for breathing. Immediately call a POISON
D20F : D2F1 : D220 :	CENTER or doctor/ physician.
P305 + P351 + P338 + P310	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue
P310	rinsing. Immediately call a POISON CENTER/ doctor.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal
	plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : p-Cresol

4-Methylphenol

Formula : C₇H₈O

Molecular weight : 108.14 g/mol CAS-No. : 106-44-5 EC-No. : 203-398-6 Index-No. : 604-004-00-9

Component	Classification	Concentration
p-cresol		
	Acute Tox. 3; Skin Corr.	<= 100 %
	1B; Eye Dam. 1; Aquatic	
	Acute 2; H301, H311,	
	H314, H318, H401	

Supelco - 442418 Page 2 of 11



SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Consult a physician. Show this material safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Take off contaminated clothing and shoes immediately. Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician. Continue rinsing eyes during transport to hospital.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Combustible.

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

Supelco - 442418 Page 3 of 11



6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed. For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature. hygroscopic Air and light sensitive. Handle and store under inert gas.

Storage class (TRGS 510): 6.1B: Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
p-cresol	106-44-5	TWA	2.3 ppm 10 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5 ppm 22 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	Skin designation		
		TWA	20 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Not classifi	able as a human	carcinogen
		Danger of o	cutaneous absor	ption
		PEL	5 ppm 22 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

Supelco - 442418 Page 4 of 11



8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm Break through time: 30 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail

sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the EC approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Supelco - 442418

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.



Page 5 of 11

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a) Appearance Form: crystalline

Color: colorless

b) Odorc) Odor Thresholddata available

d) pH No data available

e) Melting Melting point/range: 32 - 34 °C (90 - 93 °F) - lit. point/freezing point

f) Initial boiling point 202 °C 396 °F - lit. and boiling range

g) Flash point 85.0 °C (185.0 °F) - closed cup

h) Evaporation rate No data availablei) Flammability (solid, No data available gas)

j) Upper/lower Lower explosion limit: 1.1 %(V) flammability or explosive limits

k) Vapor pressure 1.3 hPa at 20.0 °C (68.0 °F)

I) Vapor density No data available

m) Relative density 1.034 g/mL at 25 °C (77 °F)

n) Water solubility No data available
 o) Partition coefficient: log Pow: 1.94

 n-octanol/water

p) Autoignition

temperature

559.0 °C (1038.2 °F)

q) Decomposition No data available temperature

r) Viscosity No data availables) Explosive properties No data availablet) Oxidizing properties No data available

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

Supelco - 442418 Page 6 of 11

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents, Bases

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides Other decomposition products - No data available

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - male - 207.0 mg/kg

Remarks: Sense Organs and Special Senses (Nose, Eye, Ear, and Taste):Olfaction:Other changes. Behavioral:Convulsions or effect on seizure threshold. Gastrointestinal:Ulceration or bleeding from stomach. (ECHA)

LC50 Inhalation - Rat - 1 h - > 710 mg/m3

Remarks: (RTECS)

LD50 Dermal - Rabbit - 301.0 mg/kg

Remarks: Behavioral:Tremor. Gastrointestinal:Changes in structure or function of salivary

glands. Kidney, Ureter, Bladder:Other changes. (ECHA)

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Causes burns. Remarks: (ECHA)

Serious eye damage/eye irritation

Causes serious eye damage.

Respiratory or skin sensitization

Draize Test - Guinea pig

Result: negative

(OECD Test Guideline 406)

Germ cell mutagenicity

Ames test

Salmonella typhimurium

Result: negative

In vitro mammalian cell gene mutation test

mouse lymphoma cells

Result: negative

Mutagenicity (mammal cell test): chromosome aberration.

Chinese hamster ovary cells

Result: positive

OECD Test Guideline 478

Mouse - male Result: negative

Carcinogenicity

Supelco - 442418 Page 7 of 11

IARC: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

No data available

Acute oral toxicity - If ingested, severe burns of the mouth and throat, as well as a danger of perforation of the esophagus and the stomach.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

Repeated dose toxicity - Rat - male and female - Oral - 13 Weeks - NOAEL (No observed adverse effect level) - 50 mg/kg

RTECS: GO6475000

Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, laryngitis, Dizziness, Cardiovascular effects., Muscle cramps/spasms., Symptoms of exposure may include burning sensation, coughing, wheezing, laryngitis, shortness of breath, headache, nausea, and vomiting.

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney -

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish static test LC50 - Salmo trutta (brown trout) - 4.4 mg/l - 96 h

Remarks: (ECHA)

Toxicity to daphnia

and other aquatic (DIN 38412)

invertebrates

Toxicity to algae static test ErC50 - Desmodesmus subspicatus (green algae) - 21

static test EC50 - Daphnia magna (Water flea) - 7.7 mg/l - 48 h

mg/l - 48 h (DIN 38412)

Toxicity to bacteria static test EC50 - Tetrahymena pyriformis - 157 mg/l - 48 h

Remarks: (ECHA)

12.2 Persistence and degradability

Biodegradability aerobic - Exposure time 10 d

Supelco - 442418 Page 8 of 11



Result: 100 % - Inherently biodegradable.

(OECD Test Guideline 302B)

12.3 Bioaccumulative potential

Bioaccumulation Danio rerio (zebra fish)(p-cresol)

Bioconcentration factor (BCF): 10.7

(OECD Test Guideline 305)

Remarks: Does not bioaccumulate.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life.

Biological effects:

Change in the flavour characteristics of fish protein.

Hazard for drinking water supplies.

Discharge into the environment must be avoided.

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

DOT (US)

UN number: 3455 Class: 6.1 (8) Packing group: II

Proper shipping name: Cresols, solid Reportable Quantity (RQ): 100 lbs Reportable Quantity (RQ): 100 lbs Poison Inhalation Hazard: No

IMDG

UN number: 3455 Class: 6.1 (8) Packing group: II EMS-No: F-A, S-B

Proper shipping name: CRESOLS, SOLID

IATA

UN number: 3455 Class: 6.1 (8) Packing group: II

Supelco - 442418 Page 9 of 11



SECTION 15: Regulatory information

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

p-cresol CAS-No. Revision Date 2007-07-01

SARA 311/312 Hazards

Acute Health Hazard

Reportable Quantity D025 lbs

Massachusetts Right To Know Components

	CAS-No.	Revision Date
p-cresol	106-44-5	2007-07-01

Pennsylvania Right To Know Components

p-cresol	CAS-No.	Revision Date
	106-44-5	2007-07-01

New Jersey Right To Know Components

p-cresol	CAS-No.	Revision Date
	106-44-5	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to the State of California to cause cancer, birth, or any other reproductive defects.

SECTION 16: Other information

Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Supelco - 442418 Page 10 of 11

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.2 Revision Date: 09/30/2020 Print Date: 08/21/2021

Supelco - 442418 Page 11 of 11



Material Safety Data Sheet

Version 5.0 Revision Date 12/18/2012 Print Date 11/20/2013

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : 1,3,5-Trimethylbenzene solution

Product Number : 41103 Brand : Supelco

Supplier : Sigma-Aldrich

3050 Spruce Street SAINT LOUIS MO 63103

USA

Telephone : +1 800-325-5832 Fax : +1 800-325-5052 Emergency Phone # (For : (314) 776-6555

both supplier and

manufacturer)
Preparation Information

rmation : Sigma-Aldrich Corporation

Product Safety - Americas Region

1-800-521-8956

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Flammable liquid, Target Organ Effect, Toxic by inhalation., Toxic by ingestion, Toxic by skin absorption

Target Organs

Eyes, Kidney, Liver, Heart, Central nervous system

GHS Classification

Flammable liquids (Category 2)
Acute toxicity, Oral (Category 3)
Acute toxicity, Inhalation (Category 3)
Acute toxicity, Dermal (Category 3)
Skin irritation (Category 2)

Eye irritation (Category 2A)

Specific target organ toxicity - single exposure (Category 1)

GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour. H301 + H311 Toxic if swallowed or in contact with skin

H315 Causes skin irritation. H319 Causes serious eye irritation.

H331 Toxic if inhaled.

H370 Causes damage to organs.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P260 Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.

P280 Wear protective gloves/ protective clothing.

P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.

P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if

present and easy to do. Continue rinsing.

P307 + P311 IF exposed: Call a POISON CENTER or doctor/ physician.

HMIS Classification

Health hazard: 2
Chronic Health Hazard: *
Flammability: 3
Physical hazards: 0

NFPA Rating

Health hazard: 2 Fire: 3 Reactivity Hazard: 0

Potential Health Effects

InhalationToxic if inhaled. Causes respiratory tract irritation.SkinToxic if absorbed through skin. Causes skin irritation.

Eyes Causes eye irritation. **Ingestion** Toxic if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : Mesitylenesolution

Component		Classification	Concentration
Methanol			
CAS-No.	67-56-1	Flam. Liq. 2; Acute Tox. 3;	90 - 100 %
EC-No.	200-659-6	STOT SE 1; H225, H301 +	
Index-No.	603-001-00-X	H311 + H331, H370	
Registration number	01-2119433307-44-XXXX		

For the full text of the H-Statements and R-Phrases mentioned in this Section, see Section 16

4. FIRST AID MEASURES

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIREFIGHTING MEASURES

Conditions of flammability

Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking.

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

Special protective equipment for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

Hazardous combustion products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

7. HANDLING AND STORAGE

Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature: 2 - 8 °C

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value	Control parameters	Basis
Methanol	67-56-1	TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
Remarks			ge Substances for of cutaneous abs	r which there is a Biological Exposure Index or Indices (see sorption
		STEL	250 ppm	USA. ACGIH Threshold Limit Values (TLV)
			ge Substances for of cutaneous abs	r which there is a Biological Exposure Index or Indices (see sorption
		TWA	200 ppm 260 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
	Skin notatio	n		
		STEL	250 ppm 325 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
	Skin notatio	n		
		TWA	200 ppm 260 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	The value in	n mg/m3 is	approximate.	
		TWA	200 ppm 260 mg/m3	USA. NIOSH Recommended Exposure Limits

Supelco - 41103 Page 3 of 7

Potential for o	dermal abs	sorption	
	ST	250 ppm 325 mg/m3	USA. NIOSH Recommended Exposure Limits
Potential for o	dermal abs	sorption	

Personal protective equipment

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Eye protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin and body protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Hygiene measures

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form liquid
Colour colourless

Safety data

pH no data available

Melting point/range: -98 °C (-144 °F)

point/freezing point

Boiling point 64 - 65 °C (147 - 149 °F) at 1,013 hPa (760 mmHg)

Flash point 11 °C (52 °F) - closed cup

Ignition temperature no data available Auto-ignition 385 °C (725 °F)

temperature

Lower explosion limit 6 %(V)
Upper explosion limit 36 %(V)

Vapour pressure 130.23 hPa (97.68 mmHg) at 20 °C (68 °F)

547 hPa (410 mmHg) at 50 °C (122 °F)

Density 0.791 g/cm3

Water solubility completely miscible Partition coefficient: no data available

n-octanol/water

Relative vapor no data available

density

Supelco - 41103 Page 4 of 7

Odour no data available
Odour Threshold no data available
Evaporation rate no data available

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

Vapours may form explosive mixture with air.

Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

Materials to avoid

Acids, Oxidizing agents, Alkali metals, Strong oxidizing agents, Acid chlorides, Acid anhydrides, Reducing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - no data available

11. TOXICOLOGICAL INFORMATION

Acute toxicity

Oral LD50 Inhalation LC50 Dermal LD50

Other information on acute toxicity

no data available

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

Eyes: no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as

probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a

carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a

known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a

carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Teratogenicity

Supelco - 41103 Page 5 of 7

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

no data available

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

no data available

Potential health effects

Inhalation Toxic if inhaled. Causes respiratory tract irritation.

Ingestion Toxic if swallowed.

Skin Toxic if absorbed through skin. Causes skin irritation.

Eyes Causes eye irritation.

Signs and Symptoms of Exposure

Methyl alcohol may be fatal or cause blindness if swallowed., Cannot be made non-poisonous., Effects due to ingestion may include:, Nausea, Dizziness, Gastrointestinal disturbance, Weakness, Confusion., Drowsiness, Unconsciousness, May cause convulsions.

Synergistic effects

no data available

Additional Information

RTECS: Not available

12. ECOLOGICAL INFORMATION

Toxicity

no data available

Persistence and degradability

no data available

Bioaccumulative potential

no data available

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

no data available

13. DISPOSAL CONSIDERATIONS

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1230 Class: 3 Packing group: II

Proper shipping name: Methanol, solution

Marine Pollutant: No

Poison Inhalation Hazard: No

IMDG

Supelco - 41103 Page 6 of 7

UN number: 1230 Class: 3 (6.1) Packing group: II EMS-No: F-E, S-D

Proper shipping name: METHANOL, SOLUTION

Marine Pollutant: No

IATA

UN number: 1230 Class: 3 (6.1) Packing group: II

Proper shipping name: Methanol, solution

15. REGULATORY INFORMATION

OSHA Hazards

Flammable liquid, Target Organ Effect, Toxic by inhalation., Toxic by ingestion, Toxic by skin absorption

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

 CAS-No.
 Revision Date

 Methanol
 67-56-1
 2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

Methanol CAS-No. Revision Date 67-56-1 2007-07-01

Pennsylvania Right To Know Components

Methanol CAS-No. Revision Date 67-56-1 2007-07-01

New Jersey Right To Know Components

Methanol CAS-No. Revision Date 67-56-1 2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Text of H-code(s) and R-phrase(s) mentioned in Section 3

Acute Tox. Acute toxicity
Flam. Liq. Flammable liquids

H225 Highly flammable liquid and vapour.

H301 + H311 + Toxic if swallowed, in contact with skin or if inhaled

H331

H370 Causes damage to organs.

STOT SE Specific target organ toxicity - single exposure

Further information

Copyright 2012 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Supelco - 41103 Page 7 of 7



SAFETY DATA SHEET

Version 6.3 Revision Date 10/11/2020 Print Date 08/21/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : 1,2,4,5-Tetramethylbenzene

Product Number : T19607
Brand : Aldrich
CAS-No. : 95-93-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable solids (Category 1), H228

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram

Signal word Danger

Hazard statement(s)

H228 Flammable solid.

Precautionary statement(s)

P210 Keep away from heat/ sparks/ open flames/ hot surfaces. No

Aldrich - T19607 Page 1 of 9



smoking.

P240 Ground/bond container and receiving equipment.

P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P280 Wear protective gloves/ protective clothing/ eye protection/ face

protection.

P370 + P378 In case of fire: Use dry sand, dry chemical or alcohol-resistant

foam for extinction.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : Durene

1,2,4,5-Tetramethylbenzene

Formula : $C_{10}H_{14}$ Molecular weight : 134.22 g/mol CAS-No. : 95-93-2 EC-No. : 202-465-7

No components need to be disclosed according to the applicable regulations.

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Consult a physician. Show this material safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

Aldrich - T19607 Page 2 of 9



SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Keep in suitable, closed containers for disposal. Contain spillage, pick up with an electrically protected vacuum cleaner or by wet-brushing and transfer to a container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Storage class (TRGS 510): 4.1B: Flammable solid hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

Millipore

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail

sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the EC approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Aldrich - T19607 Page 4 of 9



Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

SECTION 9: Physical and chemical properties

Information on basic physical and chemical properties

a) Appearance Form: crystalline

Color: colorless

b) Odor No data available c) Odor Threshold No data available

d) pH No data available

e) Melting Melting point/range: 76 - 80 °C (169 - 176 °F) - lit.

Initial boiling point No data available and boiling range

g) Flash point 74 °C (165 °F) - closed cup

h) Evaporation rate No data available

Flammability (solid, The substance or mixture is a flammable solid with the category

gas) Upper/lower

flammability or

i)

point/freezing point

No data available

explosive limits No data available k) Vapor pressure Vapor density No data available

0.838 g/mL at 25 °C (77 °F) m) Relative density n) Water solubility 0.00348 g/l at 25 °C (77 °F)

o) Partition coefficient: log Pow: 4.17 n-octanol/water

p) Autoignition No data available temperature

No data available q) Decomposition temperature

No data available r) Viscosity No data available s) Explosive properties No data available Oxidizing properties

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

Aldrich - T19607 Page 5 of 9

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides Other decomposition products - No data available

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 6,700 mg/kg

Remarks: (RTECS)

Skin corrosion/irritation

Serious eye damage/eye irritation

Respiratory or skin sensitization

Germ cell mutagenicity

Carcinogenicity

IARC: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

Specific target organ toxicity - single exposure

Specific target organ toxicity - repeated exposure

Aspiration hazard

Additional Information

RTECS: DC0500000

The data available to us do not suffice to permit any industrial-toxicological assessment.

Further toxicological data:

Risk of absorption.

Other dangerous properties can not be excluded.

Further data:

Aldrich - T19607 Page 6 of 9

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC0 - Leuciscus idus (Golden orfe) - 10 mg/l - 48 h

Remarks: (ECOTOX Database)

LC50 - Leuciscus idus (Golden orfe) - 30 mg/l - 48 h

Remarks: (ECOTOX Database)

LC100 - Leuciscus idus (Golden orfe) - 50 mg/l - 48 h

Remarks: (ECOTOX Database)

Toxicity to daphnia and other aquatic invertebrates

EC50 - Daphnia magna (Water flea) - 0.47 mg/l - 48 h

Remarks: (External MSDS)

12.2 Persistence and degradability

Not readily biodegradable.

12.3 Bioaccumulative potential

12.4 Mobility in soil

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Discharge into the environment must be avoided.

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

DOT (US)

UN number: 1325 Class: 4.1 Packing group: II

Proper shipping name: Flammable solids, organic, n.o.s. (1,2,4,5-tetramethylbenzene)

Reportable Quantity (RQ): Poison Inhalation Hazard: No

Aldrich - T19607 Page 7 of 9

IMDG

UN number: 1325 Class: 4.1 Packing group: II EMS-No: F-A, S-G Proper shipping name: FLAMMABLE SOLID, ORGANIC, N.O.S. (1,2,4,5-tetramethylbenzene)

IATA

UN number: 1325 Class: 4.1 Packing group: II

Proper shipping name: Flammable solid, organic, n.o.s. (1,2,4,5-tetramethylbenzene)

SECTION 15: Regulatory information

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

1,2,4,5-tetramethylbenzene CAS-No. Revision Date 95-93-2

New Jersey Right To Know Components

1,2,4,5-tetramethylbenzene CAS-No. Revision Date 95-93-2

California Prop. 65 Components

This product does not contain any chemicals known to the State of California to cause cancer, birth, or any other reproductive defects.

SECTION 16: Other information

Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the

Aldrich - T19607 Page 8 of 9



information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.3 Revision Date: 10/11/2020 Print Date: 08/21/2021

Aldrich - T19607 Page 9 of 9



according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.21.2014 Page 1 of 7

Barium Chloride Dihydrate

SECTION 1 : Identification of the substance/mixture and of the supplier

Product name : Barium Chloride Dihydrate

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: S25187A

Recommended uses of the product and uses restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific 9 Barnhart Drive, Hanover, PA 17331

Supplier Details:

Fisher Science Education 15 Jet View Drive, Rochester, NY 14624

Emergency telephone number:

SECTION 2: Hazards identification

Classification of the substance or mixture:



Toxic

Acute toxicity (oral, dermal, inhalation), category 3



Irritant

Acute toxicity (oral, dermal, inhalation), category 4

AcTox Oral 3
AcTox Inhaln. 4

Signal word : Danger

Hazard statements:

Toxic if swallowed Harmful if inhaled

Precautionary statements:

If medical advice is needed, have product container or label at hand

Keep out of reach of children

Read label before use

Do not eat, drink or smoke when using this product

Use only outdoors or in a well-ventilated area

Avoid breathing dust/fume/gas/mist/vapours/spray

Wash skin thoroughly after handling

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Rinse mouth

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Specific treatment (see supplemental first aid instructions on this label)

Call a POISON CENTER or doctor/physician if you feel unwell


Store locked up

Effective date: 12.21.2014 Page 2 of 7

Barium Chloride Dihydrate

Dispose of contents and container as instructed in Section 13

Other Non-GHS Classification:



NFPA/HMIS





HMIS RATINGS (0-4)

SECTION 3: Composition/information on ingredients

Ingredients:			
CAS 10326-27-9	Barium Chloride Dihydrate		100 %
		Perce	entages are by weight

SECTION 4: First aid measures

Description of first aid measures

After inhalation: Loosen clothing as necessary and position individual in a comfortable position. Remove to fresh air. Give artificial respiration if necessary. If breathing is difficult give oxygen. Seek medical attention. Do NOT use mouth - to - mouth resuscitation.

After skin contact: Wash affected area with soap and water. Rinse exposed skin with water for 20 minutes. Enter emergency shower rinsing while removing contaminated clothing and shoes. Transport victim to the hospital.

After eye contact: Protect unexposed eye. Rinse or flush exposed eye gently using water for 15-20 minutes. Occasionally lift the upper and lower eyelids while rinsing. Immediately seek medical attention.

After swallowing: Rinse mouth thoroughly. Do not induce vomiting. Do not perform mouth-to-mouth on an unconscious person. Never give anything by mouth to an unconscious person. Call Poison Control Center or a physician immediately.

Most important symptoms and effects, both acute and delayed:

Irritation.Nausea.Headache.Shortness of breath.; Eye, Skin, & Gastrointestinal irritation. Muscular stimulation Indication of any immediate medical attention and special treatment needed:

If seeking medical attention provide SDS document to physician.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.21.2014 Page 3 of 7

Barium Chloride Dihydrate

SECTION 5: Firefighting measures

Extinguishing media

Suitable extinguishing agents: Use water, dry chemical, chemical foam, or alcohol-resistant foam.

For safety reasons unsuitable extinguishing agents:

Special hazards arising from the substance or mixture:

Substance is noncombustible; use agent most appropriate to extinguish surrounding fire.Decomposes at high temperatures, resulting in toxic and corrosive products.

Advice for firefighters:

Protective equipment: Wear protective eyeware, gloves, and clothing. **Additional information (precautions):** Normal ventilation is adequate.

SECTION 6: Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Ensure that air-handling systems are operational. Ensure adequate ventilation.

Environmental precautions:

Prevent from reaching drains, sewer, or waterway. Should not be released into environment.

Methods and material for containment and cleaning up:

Wear protective eyeware, gloves, and clothing. Refer to Section 8.Always obey local regulations. If necessary use trained response staff or contractor. Evacuate personnel to safe areas. Containerize for disposal. Refer to Section 13. Keep in suitable closed containers for disposal.

Reference to other sections:

SECTION 7: Handling and storage

Precautions for safe handling:

Avoid contact with skin, eyes, and clothing. Follow good hygiene procedures when handling chemical materials. Refer to Section 8. Follow proper disposal methods. Refer to Section 13. Do not eat, drink, smoke, or use personal products when handling chemical substances. Avoid ingestion and inhalation.

Conditions for safe storage, including any incompatibilities:

Store in a cool location. Store in a cool location. Protect from freezing and physical damage. Provide ventilation for containers. Keep container tightly sealed. Store away from incompatible materials.

SECTION 8: Exposure controls/personal protection







Control Parameters: 10326-27-9, Barium chloride dihydrate, TWA 0.5 mg/m3 USA. NIOSH

10326-27-9, Barium chloride dihydrate, WA 0.5 mg/m3 USA. OSHA 10326-27-9, Barium chloride dihydrate, TWA 0.5 mg/m3 USA. ACGIH

Appropriate Engineering controls: Emergency eye wash fountains and safety showers should be available in

the immediate vicinity of use or handling. Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor and mists below the applicable workplace exposure limits (Occupational

Exposure Limits-OELs) indicated above.

Respiratory protection: Normal ventilation is adequate.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.21.2014 Page 4 of 7

Barium Chloride Dihydrate

Protection of skin: Select glove material impermeable and resistant to the substance. Select

glove material based on rates of diffusion and degradation. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Use proper glove removal technique without touching outer surface. Avoid skin contact with used gloves. Wear

protective clothing.

Eye protection: Safety glasses with side shields or goggles. Wear equipment for eye

protection tested and approved under appropriate government standards

such as NIOSH (US) or EN 166(EU).

General hygienic measures: Wash hands before breaks and at the end of work. Avoid contact with

skin, eyes, and clothing.Remove contaminated clothing and shoes.Before wearing wash contaminated clothing.Perform routine housekeeping.

SECTION 9: Physical and chemical properties

Appearance (physical state,color):	White solid	Explosion limit lower: Explosion limit upper:	Not Determined Not Determined
Odor:	Odorless	Vapor pressure:	Not Determined
Odor threshold:	Not Determined	Vapor density:	Not Determined
pH-value:	5.0 - 8.0 at 50 g/l at 25 °C	Relative density:	3.100 g/cm3
Melting/Freezing point:	962 °C	Solubilities:	Soluble in water
Boiling point/Boiling range:	1560 °C	Partition coefficient (noctanol/water):	Not Determined
Flash point (closed cup):	Not Determined	Auto/Self-ignition temperature:	Not Determined
Evaporation rate:	Not Determined	Decomposition temperature:	> 100°C
Flammability (solid,gaseous):	Not Determined	Viscosity:	a. Kinematic:Not Determined b. Dynamic: Not Determined
Density : Not Determined			

SECTION 10: Stability and reactivity

Reactivity:Nonreactive under normal conditions. **Chemical stability:**Stable under normal conditions.

Possible hazardous reactions: None under normal processing

Conditions to avoid:Excessive heat.Incompatible materials.Dust formation.

Incompatible materials:Oxidizing Agents

Hazardous decomposition products:Hydrogen chloride gas, chlorine.

SECTION 11: Toxicological information

Acute Toxicity:		
Oral:	10326-27-9	LD50 oral - rat: 118 mg/kg

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.21.2014 Page 5 of 7

Barium Chloride Dihydrate

Chronic Toxicity: No additional information.			
Corrosion Irritation: No additional information.			
Sensitization:	Irritation: Irritating to eyes and skin		
Single Target Organ (STOT):	No additional information.		
Numerical Measures:	No additional information.		
Carcinogenicity:	No additional information.		
Mutagenicity:	No additional information.		
Reproductive Toxicity:	No additional information.		

SECTION 12: Ecological information

Ecotoxicity Persistence and degradability: Readily degradable in the environment.

Bioaccumulative potential:

Mobility in soil:

Other adverse effects:

SECTION 13: Disposal considerations

Waste disposal recommendations:

It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11). Product or containers must not be disposed together with household garbage. Contact a licensed professional waste disposal service to dispose of this material. Consult federal, state, provincial, and local regulations regarding the proper disposal of waste material that may incorporate some amount of this product. Dilute with water and flush to sewer.

SECTION 14: Transport information

UN-Number

1564

UN proper shipping name

Barium Compounds, N.O.S.

Transport hazard class(es)



Class:

6.1 Toxic substances

Packing group:|||

Environmental hazard:

Transport in bulk:

Special precautions for user:

SECTION 15: Regulatory information

United States (USA)

SARA Section 311/312 (Specific toxic chemical listings):

Acute, Chronic

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.21.2014 Page 6 of 7

Barium Chloride Dihydrate

SARA Section 313 (Specific toxic chemical listings):

10326-27-9 Barium chloride dihydrate

RCRA (hazardous waste code):

10326-27-9, Not applicable

TSCA (Toxic Substances Control Act):

All ingredients are listed.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

None of the ingredients is listed

Proposition 65 (California):

Chemicals known to cause cancer:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for females:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for males:

None of the ingredients is listed

Chemicals known to cause developmental toxicity:

None of the ingredients is listed

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

None of the ingredients is listed

Canadian NPRI Ingredient Disclosure list (limit 1%):

None of the ingredients is listed

SECTION 16: Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations.Note:. The responsibility to provide a safe workplace remains with the user.The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment.The information contained herein is, to the best of our knowledge and belief, accurate.However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material.It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases:

Abbreviations and acronyms:

IMDG: International Maritime Code for Dangerous Goods

PNEC: Predicted No-Effect Concentration (REACH)

CFR: Code of Federal Regulations (USA)

SARA: Superfund Amendments and Reauthorization Act (USA)

RCRA: Resource Conservation and Recovery Act (USA)

TSCA: Toxic Substances Control Act (USA)

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.21.2014 Page 7 of 7

Barium Chloride Dihydrate

NPRI: National Pollutant Release Inventory (Canada)

DOT: US Department of Transportation IATA: International Air Transport Association

GHS: Globally Harmonized System of Classification and Labelling of Chemicals

ACGIH: American Conference of Governmental Industrial Hygienists

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA) HMIS: Hazardous Materials Identification System (USA)

WHMIS: Workplace Hazardous Materials Information System (Canada)

DNEL: Derived No-Effect Level (REACH)

Effective date: 12.21.2014 **Last updated**: 03.23.2015

Material Safety Data Sheet Benzene

ACC# 02610

Section 1 - Chemical Product and Company Identification

MSDS Name: Benzene

Catalog Numbers: AC167660000, AC167660010, AC167660025, AC167660250, AC167665000, AC168650250, AC295330000, AC295330010, AC295330025, AC295330250, AC296880000, AC296880010, AC296880025, AC296880250, AC610230010, AC610231000, AC611001000, B243-4, B245-4, B245-500,

B411-1, B411-4, B412-1, S79920ACS

Synonyms: Benzol; Cyclohexatriene; Phenyl hydride.

Company Identification:
Fisher Scientific
1 Reagent Lane

Fair Lawn, NJ 07410

For information, call: 201-796-7100 Emergency Number: 201-796-7100

For CHEMTREC assistance, call: 800-424-9300

For International CHEMTREC assistance, call: 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
71-43-2	Benzene	> 99	200-753-7

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: clear colorless liquid. Flash Point: -11 deg C.

Danger! Extremely flammable liquid and vapor. Vapor may cause flash fire. Harmful if swallowed, inhaled, or absorbed through the skin. Causes eye, skin, and respiratory tract irritation. Contains benzene. Benzene can cause cancer. Aspiration hazard if swallowed. Can enter lungs and cause damage. May cause blood abnormalities. May cause central nervous system effects.

Target Organs: Blood, central nervous system, respiratory system, eyes, bone marrow, immune system, skin.

Potential Health Effects

Eye: Causes eye irritation.

Skin: Causes skin irritation. Harmful if absorbed through the skin. Prolonged and/or repeated contact may cause defatting of the skin and dermatitis.

Ingestion: May cause central nervous system depression, characterized by excitement, followed by headache, dizziness, drowsiness, and nausea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure. May cause effects similar to those for inhalation exposure. Aspiration of material into the lungs may cause chemical pneumonitis, which may be fatal.

Inhalation: Causes respiratory tract irritation. May cause drowsiness, unconsciousness, and central nervous system depression. Exposure may lead to irreversible bone marrow injury. Exposure may lead to aplastic anemia. Potential symptoms of overexposure by inhalation are dizziness, headache, vomiting, visual disturbances, staggering gait, hilarity, fatigue, and other symptoms of CNS depression.

Chronic: May cause bone marrow abnormalities with damage to blood forming tissues. May cause anemia

and other blood cell abnormalities. Chronic exposure to benzene has been associated with an increased incidence of leukemia and multiple myeloma (tumor composed of cells of the type normally found in the bone marrow). Immunodepressive effects have been reported. This substance has caused adverse reproductive and fetal effects in laboratory animals.

Section 4 - First Aid Measures

Eyes: In case of contact, immediately flush eyes with plenty of water for a t least 15 minutes. Get medical aid.

Skin: In case of contact, flush skin with plenty of water. Remove contaminated clothing and shoes. Get medical aid if irritation develops and persists. Wash clothing before reuse.

Ingestion: Potential for aspiration if swallowed. Get medical aid immediately. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If vomiting occurs naturally, have victim lean forward.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: Treat symptomatically and supportively.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Use water spray to keep fire-exposed containers cool. Extremely flammable liquid and vapor. Vapor may cause flash fire. Approach fire from upwind to avoid hazardous vapors and toxic decomposition products. Vapors are heavier than air and may travel to a source of ignition and flash back. Vapors can spread along the ground and collect in low or confined areas. This liquid floats on water and may travel to a source of ignition and spread fire. May accumulate static electricity.

Extinguishing Media: Use water spray, dry chemical, carbon dioxide, or appropriate foam.

Flash Point: -11 deg C (12.20 deg F)

Autoignition Temperature: 498 deg C (928.40 deg F)

Explosion Limits, Lower:1.3 vol %

Upper: 7.1 vol %

NFPA Rating: (estimated) Health: 2; Flammability: 3; Instability: 0

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8. **Spills/Leaks:** Absorb spill with inert material (e.g. vermiculite, sand or earth), then place in suitable container. Avoid runoff into storm sewers and ditches which lead to waterways. Remove all sources of ignition. Provide ventilation. Approach spill from upwind. Use water spray to cool and disperse vapors, protect personnel, and dilute spills to form nonflammable mixtures.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Ground and bond containers when transferring material. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Take precautionary measures against static discharges. Keep container tightly closed. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames. Use only with adequate ventilation. Keep away from heat, sparks and flame. Avoid breathing vapor.

Storage: Keep away from sources of ignition. Store in a tightly closed container. Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Use process enclosure, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof ventilation equipment. Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. See 29CFR 1910.1028 for the regulatory requirements for the control of employee exposure to benzene.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
Benzene	0.5 ppm TWA; 2.5 ppm STEL; Skin - potential significant contribution to overall exposure by the cutaneous r oute		1 ppm TWA; 10 ppm TWA

OSHA Vacated PELs: Benzene: 10 ppm TWA (unless specified in 1910.1028)

Personal Protective Equipment Eyes: Wear chemical splash goggles.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

Section 9 - Physical and Chemical Properties

Physical State: Liquid
Appearance: clear colorless

Odor: sweetish odor - aromatic odor

pH: Not applicable.

Vapor Pressure: 75 mm Hg @ 20 deg C

Vapor Density: 2.8 (air=1)
Evaporation Rate:Not available.
Viscosity: 0.647mPa @ 20 deg C

Boiling Point: 80.1 deg C

Freezing/Melting Point: 5.5 deg C

Decomposition Temperature: Not available.

Solubility: 0.180 g/100 ml @ 25°C

Specific Gravity/Density: 0.8765 @ 20°C

Molecular Formula: C6H6 Molecular Weight: 78.11

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.

Conditions to Avoid: Ignition sources, excess heat, confined spaces.

Incompatibilities with Other Materials: Strong oxidizing agents.

Hazardous Decomposition Products: Carbon monoxide, carbon dioxide.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#:

CAS# 71-43-2: CY1400000

LD50/LC50: CAS# 71-43-2:

Dermal, guinea pig: LD50 = >9400 uL/kg;
Draize test, rabbit, eye: 88 mg Moderate;
Draize test, rabbit, eye: 2 mg/24H Severe;
Draize test, rabbit, skin: 20 mg/24H Moderate;
Inhalation, mouse: LC50 = 9980 ppm;
Inhalation, mouse: LC50 = 24 mL/kg/2H;
Inhalation, rat: LC50 = 10000 ppm/7H;
Inhalation, rat: LC50 = 34 mL/kg/2H;
Inhalation, rat: LC50 = 6.5 mL/kg/4H;
Oral, mouse: LD50 = 4700 mg/kg;
Oral, rat: LD50 = 930 mg/kg;
Oral, rat: LD50 = 1 mL/kg;

Oral, rat: LD50 = 1800 Benzene is considered very toxic; probable human oral lethal dose would be 50-500 mg/kg. Human inhalation of approximately 20,000 ppm (2% in air) was fatal in 5-10 minutes. While percutaneous absorption of liquid benzene through intact human skin can be limited (e.g., 0.05% of the applied dose), the absorbed dose via direct dermal contact combined with that received from body surface exposure to benzene in workplace air is such that a substantial fraction (20-40%) of the total exposure is due to skin absorption.

Carcinogenicity:

CAS# 71-43-2:

ACGIH: A1 - Confirmed Human Carcinogen
 California: carcinogen, initial date 2/27/87

NTP: Known carcinogenIARC: Group 1 carcinogen

Epidemiology: IARC has concluded that epidemiological studies have established the relationship between benzene exposure and the development of acute myelogenous leukemia, and that there is sufficient evidence that benzene is carcinogenic to humans.

Teratogenicity: Inhalation, rat: TCLO = 50 ppm/24H (female 7-14 day(s) after conception) Effects on Embryo or Fetus - extra-embryonic structures (e.g., placenta, umbilical cord) and Effects on Embryo or Fetus - fetotoxicity (except death, e.g., stunted fetus).; Inhalation,mouse: TCLo = 5 ppm (female 6-15 day(s) after conception) Effects on Embryo or Fetus - cytological changes (including somatic cell genetic material) and Specific Developmental Abnormalities - blood and lymphatic systems (including spleen and marrow). **Reproductive Effects:** Inhalation, rat: TCLO = 670 mg/m3/24H (female 15 day(s) pre-mating and female 1-22 day(s) after conception) female fertility index (e.g. # females pregnant per # sperm positive females; # females pregnant per # females mated).; Oral, mouse: TDLo = 12 gm/kg (female 6-15 day(s) after conception) Fertility - post-implantation mortality (e.g. dead and/or resorbed implants per total number of implants).

Mutagenicity: DNA Inhibition: Human, Leukocyte = 2200 umol/L.; DNA Inhibition: Human, HeLa cell = 2200 umol/L.; Mutation Test Systems - not otherwise specified: Human, Lymphocyte = 5 umol/L.; Cytogenetic Analysis: Inhalation, Human = 125 ppm/1Y.; Cytogenetic Analysis: Human, Leukocyte = 1 mmol/L/72H.; Cytogenetic Analysis: Human, Lymphocyte = 1 mg/L.

Neurotoxicity: See actual entry in RTECS for complete information.

Other Studies:

Section 12 - Ecological Information

Ecotoxicity: Fish: Mosquito Fish: TLm = 395 mg/L; 24 Hr; UnspecifiedFish: Goldfish: LC50 = 46 mg/L; 24 Hr; Modified ASTM D 1345Fish: Fathead Minnow: LC50 = 15.1 mg/L; 96 Hr; Flow-through at 25°C (pH 7.9-8.0)Fish: Rainbow trout: LC50 = 5.3 mg/L; 96 Hr; Flow-through at 25°C (pH 7.9-8.0)Fish: Bluegill/Sunfish: LD50 = 20 mg/L; 24-48 Hr; Unspecified If benzene is released to soil, it will be subject to rapid volatilization near the surface and that which does not evaporate will be highly to very highly mobile in the soil and may leach to groundwater. If benzene is released to water, it will be subject to rapid volatilization. It will not be expected to significantly adsorb to sediment, bioconcentrate in aquatic organisms or hydrolyze. It may be subject to biodegradation.

Environmental: If benzene is released to the atmosphere, it will exist predominantly in the vapor phase. Gas-phase benzene will not be subject to direct photolysis but it will react with photochemically produced hydroxyl radicals with a half-life of 13.4 days. The reaction time in polluted atmospheres which contain nitrogen oxides or sulfur dioxide is accelerated with the half-life being reported as 4-6 hours. Benzene is fairly soluble in water and is removed from the atmosphere in rain.

Physical: Products of photooxidation include phenol, nitrophenols, nitrobenzene, formic acid, and peroxyacetyl nitrate.

Other: No information available.

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed.

RCRA U-Series:

CAS# 71-43-2: waste number U019 (Ignitable waste, Toxic waste).

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	BENZENE	BENZENE
Hazard Class:	3	3
UN Number:	UN1114	UN1114
Packing Group:	II	II
Additional Info:		FLASHPOINT -11 C

Section 15 - Regulatory Information

US FEDERAL

TSCA

CAS# 71-43-2 is listed on the TSCA inventory.

Health & Safety Reporting List

None of the chemicals are on the Health & Safety Reporting List.

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

CAS# 71-43-2: 10 lb final RQ (received an adjusted RQ of 10 lbs based on potential carcinogeni

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPQ.

SARA Codes

CAS # 71-43-2: immediate, delayed, fire.

Section 313

This material contains Benzene (CAS# 71-43-2, > 99%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

Clean Air Act:

CAS# 71-43-2 is listed as a hazardous air pollutant (HAP).

This material does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors.

Clean Water Act:

CAS# 71-43-2 is listed as a Hazardous Substance under the CWA. CAS# 71-43-2 is listed as a Priority Pollutant under the Clean Water
Act. CAS# 71-43-2 is listed as a Toxic Pollutant under the Clean Water
Act.

OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

CAS# 71-43-2 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

California Prop 65

The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act:

WARNING: This product contains Benzene, a chemical known to the state of California to cause cancer.

WARNING: This product contains Benzene, a chemical known to the state of California to cause male reproductive toxicity.

California No Significant Risk Level: CAS# 71-43-2: 6.4 æg/day NSRL (oral); 13 æg/day NSRL (inhalation)

European/International Regulations

European Labeling in Accordance with EC Directives Hazard Symbols:

ΤF

Risk Phrases:

R 11 Highly flammable.

R 36/38 Irritating to eyes and skin.

R 45 May cause cancer.

R 46 May cause heritable genetic damage.

R 48/23/24/25 Toxic: danger of serious damage to health by

prolonged exposure through inhalation, contact with skin and if swallowed.

R 65 Harmful: may cause lung damage if swallowed.

Safety Phrases:

S 45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

S 53 Avoid exposure - obtain special instructions before use.

WGK (Water Danger/Protection)

CAS# 71-43-2: 3

Canada - DSL/NDSL

CAS# 71-43-2 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of B2, D2A, D2B.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

CAS# 71-43-2 is listed on the Canadian Ingredient Disclosure List.

Section 16 - Additional Information

MSDS Creation Date: 6/11/1999 Revision #8 Date: 9/11/2008

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 1 of 7

Chromium, Reagent Grade,

SECTION 1: Identification of the substance/mixture and of the supplier

Product name : Chromium, Reagent Grade,

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: S25249A

Recommended uses of the product and uses restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific 9 Barnhart Drive, Hanover, PA 17331

Supplier Details:

Fisher Science Education 15 Jet View Drive, Rochester, NY 14624

Emergency telephone number:

SECTION 2: Hazards identification

Classification of the substance or mixture:



Environmentally Damaging

Chronic hazards to the aquatic environment, category 1 Acute hazards to the aquatic environment, category 1

Aquatic Acute 1 Aquatic Chronic 1

Signal word : Warning

Hazard statements:

Very toxic to aquatic life with long lasting effects

Precautionary statements:

If medical advice is needed, have product container or label at hand

Keep out of reach of children

Read label before use

Do not eat, drink or smoke when using this product

Avoid release to the environment


Collect spillage

Dispose of contents and container to an approved waste disposal plant

Other Non-GHS Classification:

WHMIS NFPA/HMIS **Effective date**: 10.24.2014 Page 2 of 7

Chromium, Reagent Grade,





HMIS RATINGS (0-4)

SECTION 3: Composition/information on ingredients

Ingredients:				
CAS 7440-47-3	Chromium	>98 %		
		Percentages are by weight		

SECTION 4: First aid measures

Description of first aid measures

After inhalation: Loosen clothing as necessary and position individual in a comfortable position. Move exposed to fresh air. Give artificial respiration if necessary. If breathing is difficult give oxygen. Get medical assistance if cough or other symptoms appear.

After skin contact: Rinse/flush exposed skin gently using soap and water for 15-20 minutes. Seek medical advice if discomfort or irritation persists.

After eye contact: Protect unexposed eye. Rinse/flush exposed eye(s) gently using water for 15-20 minutes. Remove contact lens(es) if able to do so during rinsing. Seek medical attention if irritation persists or if concerned.

After swallowing: Rinse mouth thoroughly. Do not induce vomiting. Have exposed individual drink sips of water. Seek medical attention if irritation, discomfort or vomiting persists. Never give anything by mouth to an unconscious person.

Most important symptoms and effects, both acute and delayed:

Irritation, Nausea, Headache, Shortness of breath.;

Indication of any immediate medical attention and special treatment needed:

If seeking medical attention, provide SDS document to physician. Physician should treat symptomatically.

SECTION 5 : Firefighting measures

Extinguishing media

Suitable extinguishing agents: Use appropriate fire suppression agents for adjacent combustible materials or sources of ignition. Use water, dry chemical, chemical foam, carbon dioxide, or alcohol-resistant foam.

For safety reasons unsuitable extinguishing agents:

Special hazards arising from the substance or mixture:

Combustion products may include carbon oxides or other toxic vapors. Thermal decomposition can lead to release of irritating gases and vapors.

Advice for firefighters:

Protective equipment: Use NIOSH-approved respiratory protection/breathing apparatus.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 3 of 7

Chromium, Reagent Grade,

Additional information (precautions): Move product containers away from fire or keep cool with water spray as a protective measure, where feasible. Use spark-proof tools and explosion-proof equipment. Avoid generating dust; fine dust dispersed in air in sufficient concentrations, and in the presence of an ignition source is a potential dust explosion hazard. Avoid inhaling gases, fumes, dust, mist, vapor, and aerosols. Avoid contact with skin, eyes, and clothing.

SECTION 6 : Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Wear protective equipment. Ensure that air-handling systems are operational. Ensure adequate ventilation.

Environmental precautions:

Prevent from reaching drains, sewer or waterway. Collect contaminated soil for characterization per Section 13. Should not be released into environment.

Methods and material for containment and cleaning up:

Keep in suitable closed containers for disposal. Wear protective eyeware, gloves, and clothing. Refer to Section 8. Always obey local regulations. Evacuate personnel to safe areas.

Reference to other sections:

SECTION 7: Handling and storage

Precautions for safe handling:

Minimize dust generation and accumulation. Follow good hygiene procedures when handling chemical materials. Refer to Section 8.Avoid release to the environment.Do not eat, drink, smoke, or use personal products when handling chemical substances. Avoid contact with eyes, skin, and clothing.

Conditions for safe storage, including any incompatibilities:

Store away from incompatible materials. Protect from freezing and physical damage. Keep away from food and beverages. Provide ventilation for containers. Store in cool, dry conditions in well sealed containers. Store with like hazards

SECTION 8: Exposure controls/personal protection





Control Parameters:

Appropriate Engineering controls:

7440-47-3, Chromium, NIOSH REL: TWA 0.5 mg/m3

Emergency eye wash fountains and safety showers should be available in the immediate vicinity of use/handling.Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor or dusts (total/respirable) below the applicable workplace exposure limits (Occupational Exposure Limits-OELs) indicated above.It is recommended that all dust control equipment such as local exhaust ventilation and material transport systems involved in handling of this product contain explosion relief vents or an explosion suppression system or an oxygen deficient environment.Ensure that dust-handling systems (such as exhaust ducts, dust collectors, vessels, and processing equipment) are designed in a manner to prevent the escape of dust into the work area (i.e., there is no leakage from the equipment). Use under a fume hood

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 4 of 7

Chromium, Reagent Grade,

Respiratory protection: Not required under normal conditions of use. Where risk assessment

shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. When necessary use NIOSH approved

breathing equipment.

Protection of skin: Select glove material impermeable and resistant to the substance. Select

glove material based on rates of diffusion and degradation. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Use proper glove removal technique without touching outer surface. Avoid skin contact with used gloves. Wear

protective clothing.

Eye protection: Wear equipment for eye protection tested and approved under

appropriate government standards such as NIOSH (US) or EN 166(EU). Safety glasses or goggles are appropriate eye protection.

General hygienic measures: Perform routine housekeeping. Wash hands before breaks and at the end

of work. Avoid contact with skin, eyes, and clothing. Before wearing wash

contaminated clothing.

SECTION 9: Physical and chemical properties

Appearance (physical state,color):	Silver-gray solid	Explosion limit lower: Explosion limit upper:	Not determined Not determined
Odor:	Not Determined	Vapor pressure:	Not determined
Odor threshold:	Not determined	Vapor density:	Negligible
pH-value:	Not Determined	Relative density:	Not determined
Melting/Freezing point:	1857.2°C (3374.96°F)	Solubilities:	insoluble
Boiling point/Boiling range:	2642°C (4787.6°F)	Partition coefficient (noctanol/water):	Not determined
Flash point (closed cup):	Not determined	Auto/Self-ignition temperature:	Not determined
Evaporation rate:	Not determined	Decomposition temperature:	Not determined
Flammability (solid,gaseous):	Not determined	Viscosity:	a. Kinematic:Not determined b. Dynamic: Not determined
Density : 7.2 @ 28°C			

SECTION 10: Stability and reactivity

Reactivity:Nonreactive under normal conditions. **Chemical stability:**Stable under normal conditions.

Possible hazardous reactions: None under normal processing

Conditions to avoid:Incompatible Materials.

Incompatible materials:Strong acids.Strong bases.Oxidizing agents.

Hazardous decomposition products:

SECTION 11: Toxicological information

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 5 of 7

Chromium, Reagent Grade,

Acute Toxicity: No additional information.			
Chronic Toxicity: No additional information.			
Corrosion Irritation: No additional information.			
Sensitization: No additional information.			
Single Target Organ (STOT): No additional information.			
Numerical Measures: No additional information.			
Carcinogenicity: No additional information.			
Mutagenicity: No additional information.			
Reproductive Toxicity: No additional information.			

SECTION 12: Ecological information

Ecotoxicity

Toxicity to fish: LC50 - Cyprinus carpio (Carp) - 14.3 mg/l - 96 h

Persistence and degradability: **Bioaccumulative potential:**

Mobility in soil:

Other adverse effects:

SECTION 13: Disposal considerations

Waste disposal recommendations:

Contact a licensed professional waste disposal service to dispose of this material. Dispose of empty containers as unused product. Product or containers must not be disposed with household garbage. It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11).Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations. Ensure complete and accurate classification.

SECTION 14: Transport information

UN-Number

3077

UN proper shipping name

ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Chromium)

Transport hazard class(es)



9 Miscellaneous dangerous substances and articles

Packing group: Marine pollutant

Environmental hazard:

Transport in bulk:

Special precautions for user:

SECTION 15: Regulatory information

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 6 of 7

Chromium, Reagent Grade,

United States (USA)

SARA Section 311/312 (Specific toxic chemical listings):

None of the ingredients is listed

SARA Section 313 (Specific toxic chemical listings):

None of the ingredients is listed

RCRA (hazardous waste code):

None of the ingredients is listed

TSCA (Toxic Substances Control Act):

All ingredients are listed.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

7440-47-3 Chromium: RQ 5000 LB

Proposition 65 (California):

Chemicals known to cause cancer:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for females:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for males:

None of the ingredients is listed

Chemicals known to cause developmental toxicity:

None of the ingredients is listed

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

7440-47-3 Chromium

Canadian NPRI Ingredient Disclosure list (limit 1%):

None of the ingredients is listed

SECTION 16: Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations.Note:. The responsibility to provide a safe workplace remains with the user.The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment.The information contained herein is, to the best of our knowledge and belief, accurate.However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material.It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases:

Abbreviations and acronyms:

IMDG: International Maritime Code for Dangerous Goods

IATA: International Air Transport Association

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 10.24.2014 Page 7 of 7

Chromium, Reagent Grade,

GHS: Globally Harmonized System of Classification and Labelling of Chemicals

ACGIH: American Conference of Governmental Industrial Hygienists

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA) HMIS: Hazardous Materials Identification System (USA)

WHMIS: Workplace Hazardous Materials Information System (Canada)

DNEL: Derived No-Effect Level (REACH)

PNEC: Predicted No-Effect Concentration (REACH)

CFR: Code of Federal Regulations (USA)

SARA: Superfund Amendments and Reauthorization Act (USA)

RCRA: Resource Conservation and Recovery Act (USA)

TSCA: Toxic Substances Control Act (USA)

NPRI: National Pollutant Release Inventory (Canada)

DOT: US Department of Transportation

Effective date: 10.24.2014 **Last updated**: 03.19.2015

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 03.02.2015 Page 1 of 9

Copper, Metal Foil

SECTION 1: Identification of the substance/mixture and of the supplier

Product name: Copper, Metal Foil

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: \$25267

Recommended uses of the product and restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific, Inc 9 Barnhart Drive, Hanover, PA 17331 (717) 632-1291

Supplier Details:

Fisher Science Education 6771 Silver Crest Road, Nazareth, PA 18064 (724)517-1954

Emergency telephone number:

Fisher Science Education

Emergency Telephone No.: 800-535-5053

SECTION 2: Hazards identification

Classification of the substance or mixture:



Toxic

Acute toxicity (oral, dermal, inhalation), category 2



Irritant

Eye irritation, category 2A Skin sensitization, category 1



Health hazard

Germ cell mutagenicity, category 1A

Specific target organ toxicity following repeated exposure, category 2

Acute toxicity - Oral - Category 2: H300 Fatal if swallowed.

Acute toxicity - Inhalation - Category 2: H330 Fatal if inhaled.

Specific target organ toxicity - Repeated exposure - (Oral,Inhalation) - Category 2: H373 May cause damage to digestive system, hematopoietic system, kidneys, nose, respiratory system, and/or skin through prolonged or repeated exposure if inhaled.

Hazards Not Otherwise Classified - Combustible Dust.

Not classified for physical or health hazards under GHS.

Hazards Not Otherwise Classified - Combustible Dust.

Serious Eye Damage/Eye Irritation - Category 2: H319 Causes serious eye irritation.

Skin sensitizers - Category 1: H317 May cause allergic skin reaction.

Germ cell mutagenicity - Category 1: H340 May cause genetic defects.

Hazardous to aquatic environment - acute hazard - Category 1: H400 Very toxic to aquatic life.

Signal word: Danger

Hazard statements:

Fatal if swallowed. Fatal if inhaled.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 03.02.2015 Page 2 of 9

Copper, Metal Foil

May cause an allergic skin reaction.

Causes serious eye irritation.

May cause genetic defects.

May cause damage to organs through prolonged or repeated exposure.

Very toxic to aquatic life.

Precautionary statements:

If medical advice is needed, have product container or label at hand.

Keep out of reach of children.

Read label before use.

If medical advice is needed, have product container or label at hand.

Keep out of reach of children.

Read label before use.

Wash skin thoroughly after handling.

Avoid release to the environment.

Do not eat, drink or smoke when using this product.

Do not eat, drink or smoke when using this product.

Use only outdoors or in a well-ventilated area.

Wear protective gloves/protective clothing/eye protection/face protection.

Avoid breathing dust/fume/gas/mist/vapours/spray.

Use only outdoors or in a well-ventilated area.

Obtain special instructions before use.

Do not handle until all safety precautions have been read and understood.

Use personal protective equipment as required.

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

Wash contaminated clothing before reuse.

IF exposed or concerned: Get medical advice/attention.

Collect spillage.

Specific treatment (see supplemental first aid instructions on this label).

Rinse mouth.

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.

Immediately call a POISON CENTER or doctor/physician.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do.

Continue rinsing.

If eye irritation persists get medical advice/attention.

IF ON SKIN: Wash with soap and water.

If skin irritation or a rash occurs: Get medical advice/attention.

Store locked up.

Dispose of contents and container as instructed in Section 13.

Other Non-GHS Classification:

WHMIS






NFPA/HMIS

Effective date: 03.02.2015 Page 3 of 9

Copper, Metal Foil





HMIS RATINGS (0-4)

SECTION 3: Composition/information on ingredients

Ingredients:			
CAS 7440-50-8	Copper	100 %	
		Percentages are by weight	

SECTION 4: First aid measures

Description of first aid measures

After inhalation:

Loosen clothing as necessary and position individual in a comfortable position. Move exposed to fresh air. Give artificial respiration if necessary. If breathing is difficult give oxygen. Get medical assistance if cough or other symptoms appear.

After skin contact:

Rinse/flush exposed skin gently using soap and water for 15-20 minutes. Seek medical advice if discomfort or irritation persists.

After eye contact:

Protect unexposed eye. Rinse/flush exposed eye(s) gently using water for 15-20 minutes. Remove contact lens(es) if able to do so during rinsing. Seek medical attention if irritation persists or if concerned.

After swallowing:

Rinse mouth thoroughly. Do not induce vomiting, Have exposed individual drink sips of water. Seek medical attention if irritation, discomfort or vomiting persists. Never give anything by mouth to an unconscious person.

Most important symptoms and effects, both acute and delayed:

Irritation, Nausea, Headache, Shortness of breath.

Indication of any immediate medical attention and special treatment needed:

If seeking medical attention, provide SDS document to physician. Physician should treat symptomatically.

SECTION 5: Firefighting measures

Extinguishing media

Suitable extinguishing agents:

Use appropriate fire suppression agents for adjacent combustible materials or sources of ignition. Use water, dry chemical, chemical foam, carbon dioxide, or alcohol-resistant foam.

Unsuitable extinguishing agents:

None identified.

Special hazards arising from the substance or mixture:

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 03.02.2015 Page 4 of 9

Copper, Metal Foil

Oxides of copper. Combustion products may include carbon oxides or other toxic vapors. Thermal decomposition can lead to release of irritating gases and vapors. Dust can be an explosion hazard when exposed to heat or flame. Noncombustible solid in bulk form, but powdered form may ignite.

Advice for firefighters:

Protective equipment:

Use NIOSH-approved respiratory protection/breathing apparatus.

Additional information (precautions):

Move product containers away from fire or keep cool with water spray as a protective measure, where feasible. Use spark-proof tools and explosion-proof equipment. Avoid generating dust; fine dust dispersed in air in sufficient concentrations, and in the presence of an ignition source is a potential dust explosion hazard. Avoid inhaling gases, fumes, dust, mist, vapor, and aerosols. Avoid contact with skin, eyes, and clothing.

SECTION 6: Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Wear protective equipment. Use spark-proof tools and explosion-proof equipment. Ensure that air-handling systems are operational. Ensure adequate ventilation.

Environmental precautions:

Prevent from reaching drains, sewer or waterway. Collect contaminated soil for characterization per Section 13. Should not be released into environment.

Methods and material for containment and cleaning up:

Keep in suitable closed containers for disposal. Wear protective eyeware, gloves, and clothing. Refer to Section 8. Always obey local regulations. Dust deposits should not be allowed to accumulate on surfaces, as these may form an explosive mixture if they are released into the atmosphere in sufficient concentration. Avoid dispersal of dust in the air (i.e., clearing dust surfaces with compressed air). Collect solids in powder form using vacuum with (HEPA filter). Evacuate personnel to safe areas. Clean up spills immediately, observing precautions in the Protective Equipment section. Sweep up, then place into a suitable container for disposal. Avoid generating dusty conditions.

Reference to other sections: None

SECTION 7: Handling and storage

Precautions for safe handling:

Minimize dust generation and accumulation. Follow good hygiene procedures when handling chemical materials. Refer to Section 8. Do not eat, drink, smoke, or use personal products when handling chemical substances. Avoid contact with eyes, skin, and clothing.

Conditions for safe storage, including any incompatibilities:

Store away from incompatible materials. Protect from freezing and physical damage. Keep away from food and beverages. Provide ventilation for containers. Avoid storage near extreme heat, ignition sources or open flame. Store in cool, dry conditions in well sealed containers. Store with like hazards.

SECTION 8: Exposure controls/personal protection





according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 03.02.2015 Page 5 of 9

Copper, Metal Foil

Control Parameters: 7440-50-8 , Copper , OSHA PEL TWA (Total Dust) TWA 1 mg/m3.

7440-50-8, Copper, ACGIH TLV: 0.2 mg/m3 TWA (fume); 1 mg/m3 TWA

(dusts and mists).

7440-50-8, Copper, OSHA PEL: 0.1 mg/m3 TWA (fume).

Appropriate Engineering controls: Emergency eye wash fountains and safety showers should be available in

the immediate vicinity of use/handling. Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor or dusts (total/respirable) below the applicable workplace exposure limits (Occupational Exposure Limits-OELs) indicated above. It is recommended that all dust control equipment such as local exhaust ventilation and material transport systems involved in handling of this product contain explosion relief vents or an explosion suppression system or an oxygen deficient environment. Ensure that dust-handling systems (such as exhaust ducts, dust collectors, vessels, and processing equipment) are designed in a manner to prevent the escape of dust into the work area (i.e., there is no leakage from the equipment). Use under a fume hood.

Respiratory protection: Not required under normal conditions of use. Where risk assessment

shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. When necessary use NIOSH approved

breathing equipment.

Protection of skin: Select glove material impermeable and resistant to the substance. Select

glove material based on rates of diffusion and degradation. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Use proper glove removal technique without touching outer surface. Avoid skin contact with used gloves. Wear

protective clothing.

Eye protection: Wear equipment for eye protection tested and approved under

appropriate government standards such as NIOSH (US) or EN 166(EU).

Safety glasses or goggles are appropriate eye protection.

General hygienic measures: Perform routine housekeeping. Wash hands before breaks and at the end

of work. Avoid contact with skin, eyes, and clothing. Before wearing wash

contaminated clothing.

SECTION 9: Physical and chemical properties

Appearance (physical state, color):	Red to brown solid	Explosion limit lower: Explosion limit upper:	Not determined Not determined
Odor:	Odorless	Vapor pressure at 20°C:	Not determined
Odor threshold:	Not determined	Vapor density:	Not determined
pH-value:	Not determined	Relative density:	Not determined
Melting/Freezing point:	1083°C (1981.4°F)	Solubilities:	Insoluble.
Boiling point/Boiling range:	1/5U5°((/////3°F)	Partition coefficient (noctanol/water):	Not determined
Flash point (closed cup):	Not determined	Auto/Self-ignition temperature:	Not determined
Evaporation rate:	Not determined	Decomposition temperature:	Not determined
Flammability (solid, gaseous):	Not determined	Viscosity:	a. Kinematic: Not determined b. Dynamic: Not determined
Density at 20°C:	8.94 (Water = 1)		

SECTION 10: Stability and reactivity

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 03.02.2015 Page 6 of 9

Copper, Metal Foil

Reactivity:

Stable at room temperature in closed containers under normal storage and handling conditions.

Chemical stability:

Stable under normal conditions.

Possible hazardous reactions:

None under normal processing.

Conditions to avoid:

Incompatible Materials. Dust formation. Moisture. Exposure to air.

Incompatible materials:

Liquid copper explodes on contact with water. Reacts violently with ammonium nitrate, bromates, iodates, chlorates, ethylene oxide, hydrazoic acid, potassium oxide, dimethyl sulfoxide Page 3 of 4 CU4500 + trichloroacetic acid, hydrogen peroxide, sodium peroxide, sodium azide, sulfuric acid, hydrogen sulfide + air, and lead azide. Ignites on contact with chlorine, fluorine (above 121C), chlorine trifluoride, and hydrazinium nitrate (above 70C). Incompatible with 1-bromo-2-propyne, potassium dioxide, and actylenic compounds.

Hazardous decomposition products:

Oxides of copper.

SECTION 11: Toxicological information

Acute Toxicity:

Oral:

7440-50-8 LD50, Rat 472mg/KG

Chronic Toxicity:

Oral:

7440-50-8 Chronic copper poisoning is typified by hepatic cirrhosis, brain damage and demyelination, kidney defects, and copper deposition in the cornea as exemplified by humans with Wilson's disease. It has also been reported that copper poisoning has led to hemolytic anemia and accelerates arteriosclerosis.

Corrosion Irritation:

Dermal:

7440-50-8 Dust is irritating to the respiratory tract. Inhalation of fumes may cause metal fume fever, which is characterized by flu-like symptoms with metallic taste, fever, chills, cough, weakness, chest pain, muscle pain and increased white blood cell count.

Sensitization: No additional information.

Numerical Measures: No additional information. **Carcinogenicity**: No additional information.

Mutagenicity:

Please refer to RTECS# BO9000000 for specific information.

Reproductive Toxicity:

Fertility: Post-implantation mortality, oral-rat TDLo=40mg/kg.

SECTION 12: Ecological information

Ecotoxicity:

Freshwater fish: 96 Hr LC50 Pimephales promelas: 0.0068 - 0.0156 mg/L; 96 Hr LC50 Pimephales promelas: <0.3 mg/L [static]; 96 Hr LC50 Pimephales promelas: 0.2 mg/L [flow-through]; 96 Hr LC50 Oncorhynchus

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 03.02.2015 Page 7 of 9

Copper, Metal Foil

mykiss: 0.052 mg/L [flow-through]; 96 Hr LC50 Lepomis macrochirus: 1.25 mg/L [static]; 96 Hr LC50 Cyprinus carpio: 0.3 mg/L [semi-static]; 96 Hr LC50 Cyprinus carpio: 0.8 mg/L [static]; 96 Hr LC50 Poecilia reticulata: 0.112 mg/L [flow-through]

Water flea: 48 Hr EC50 Daphnia magna: 0.03 mg/L [Static]

Persistence and degradability:

No information available.

Bioaccumulative potential:

No information available.

Mobility in soil: No additional information.

Other adverse effects:

No information available.

SECTION 13: Disposal considerations

Waste disposal recommendations:

Contact a licensed professional waste disposal service to dispose of this material. Dispose of empty containers as unused product. Product or containers must not be disposed with household garbage. It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11). Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations. Ensure complete and accurate classification.

SECTION 14: Transport information

US DOT

UN Number:

ADR, ADN, DOT, IMDG, IATA

3089

None

Limited Quantity Exception:

Bulk:

RQ (if applicable): None

Proper shipping Name: Metal Powder,

Flammable, NOS (Copper Sulfate).

Hazard Class: 4
Packing Group: II.

Marine Pollutant (if applicable): No

additional information. **Comments:** None

Non Bulk:

RQ (if applicable): None

Proper shipping Name: Metal Powder,

Flammable, NOS (Copper Sulfate).

Hazard Class: 4
Packing Group: II.

Marine Pollutant (if applicable): No

additional information. **Comments:** None





SECTION 15: Regulatory information

United States (USA)

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 03.02.2015 Page 8 of 9

Copper, Metal Foil

SARA Section 311/312 (Specific toxic chemical listings):

Acute, Chronic, Fire

SARA Section 313 (Specific toxic chemical listings):

None of the ingredients are listed.

RCRA (hazardous waste code):

None of the ingredients are listed.

TSCA (Toxic Substances Control Act):

All ingredients are listed.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

7440-50-8 Copper Sulfate 5000 Lbs.

Proposition 65 (California):

Chemicals known to cause cancer:

None of the ingredients are listed.

Chemicals known to cause reproductive toxicity for females:

None of the ingredients are listed.

Chemicals known to cause reproductive toxicity for males:

None of the ingredients are listed.

Chemicals known to cause developmental toxicity:

None of the ingredients are listed.

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

None of the ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 1%):

None of the ingredients are listed.

SECTION 16: Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations. Note. The responsibility to provide a safe workplace remains with the user. The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment. The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material. It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases: None

Abbreviations and Acronyms:

IMDG International Maritime Code for Dangerous Goods.

PNEC Predicted No-Effect Concentration (REACH).

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 03.02.2015 Page 9 of 9

Copper, Metal Foil

CFR Code of Federal Regulations (USA).

SARA Superfund Amendments and Reauthorization Act (USA).

RCRA Resource Conservation and Recovery Act (USA).

TSCA Toxic Substances Control Act (USA).

NPRI National Pollutant Release Inventory (Canada).

DOT US Department of Transportation.

IATA International Air Transport Association.

GHS Globally Harmonized System of Classification and Labelling of Chemicals.

ACGIH American Conference of Governmental Industrial Hygienists.

CAS Chemical Abstracts Service (division of the American Chemical Society).

NFPA National Fire Protection Association (USA).

HMIS Hazardous Materials Identification System (USA).

WHMIS Workplace Hazardous Materials Information System (Canada).

DNEL Derived No-Effect Level (REACH).

Effective date: 03.02.2015 **Last updated**: 06.17.2015



SAFETY DATA SHEET

Version 6.2 Revision Date 10/05/2020 Print Date 08/21/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 **Product identifiers**

Product name : Dibenzofuran

Product Number : 236373 **Brand** : Aldrich CAS-No. : 132-64-9

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

: Sigma-Aldrich Inc. Company

3050 SPRUCE ST ST. LOUIS MO 63103

UNITED STATES

Telephone +1 314 771-5765 Fax +1 800 325-5052

1.4 **Emergency telephone**

> Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

Not a hazardous substance or mixture.

2.2 GHS Label elements, including precautionary statements

Not a hazardous substance or mixture.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 **Substances**

: Diphenylene oxide **Synonyms**

Formula $: C_{12}H_8O$

Aldrich - 236373 Page 1 of 8



Molecular weight : 168.19 g/mol CAS-No. : 132-64-9 EC-No. : 205-071-3

No components need to be disclosed according to the applicable regulations.

SECTION 4: First aid measures

4.1 Description of first-aid measures

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration.

In case of skin contact

Wash off with soap and plenty of water.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Avoid dust formation. Avoid breathing vapors, mist or gas. For personal protection see section 8.

6.2 Environmental precautions

No special environmental precautions required.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Keep in suitable, closed containers for disposal.

Aldrich - 236373 Page 2 of 8

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): 11: Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

General industrial hygiene practice.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail

sales@kcl.de, test method: EN374

Aldrich - 236373 Page 3 of 8

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the EC approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

No special environmental precautions required.

SECTION 9: Physical and chemical properties

Information on basic physical and chemical properties

a) Appearance Form: powder, finecrystalline

Color: white, beige

No data available b) Odor c) Odor Threshold No data available d) pH No data available

Melting point/range: 80 - 82 °C (176 - 180 °F) - lit. e) Melting

point/freezing point

Initial boiling point 154 - 155 °C 309 - 311 °F at 27 hPa - lit. and boiling range

g) Flash point 130 °C (266 °F) - closed cup

No data available h) Evaporation rate Flammability (solid, No data available i)

gas)

Aldrich - 236373

Upper/lower No data available j)

flammability or explosive limits

k) Vapor pressure No data available Vapor density No data available

1.3 g/cm3 at 20 °C (68 °F) m) Relative density

n) Water solubility insoluble

o) Partition coefficient: log Pow: 4.12 - (Lit.), Potential bioaccumulation n-octanol/water

No data available p) Autoignition

The life science business of Merck KGaA, Darmstadt, Germany

operates as MilliporeSigma in the US and Canada

temperature



Page 4 of 8

q) Decomposition No data available temperature

r) Viscosity No data availables) Explosive properties No data availablet) Oxidizing properties No data available

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides Other decomposition products - No data available

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as probable, possible or confirmed human carcinogen by IARC.

Aldrich - 236373 Page 5 of 8



NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Hazardous properties cannot be excluded.

Handle in accordance with good industrial hygiene and safety practice.

SECTION 12: Ecological information

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No ecological problems are to be expected when the product is handled and used with due care and attention.

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company.

Aldrich - 236373 Page 6 of 8



Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

DOT (US)

UN number: 3077 Class: 9 Packing group: III

Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Dibenzofuran)

Reportable Quantity (RQ): 100 lbs Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

SECTION 15: Regulatory information

SARA 302 Components

This material does not contain any components with a section 302 EHS TPQ.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

CAS-No. Revision Date Dibenzofuran 132-64-9 2007-07-01

SARA 311/312 Hazards

No SARA Hazards

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

Dibenzofuran CAS-No. Revision Date 132-64-9 2007-07-01

SECTION 16: Other information

Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See

Aldrich - 236373 Page 7 of 8



www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.2 Revision Date: 10/05/2020 Print Date: 08/21/2021

Aldrich - 236373 Page 8 of 8



Material Safety Data Sheet Ethylbenzene

ACC# 00596

Section 1 - Chemical Product and Company Identification

MSDS Name: Ethylbenzene

Catalog Numbers: AC118080000, AC118080025, AC118080250, AC118080251, AC118085000, 11808-

0010, 02751-1

Synonyms: Ethylbenzol; Phenylethane.

Company Identification:
Fisher Scientific
1 Reagent Lane

Fair Lawn, NJ 07410
For information, call: 201-796-7100
Emergency Number: 201-796-7100

For CHEMTREC assistance, call: 800-424-9300

For International CHEMTREC assistance, call: 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
100-41-4	Ethylbenzene	>99	202-849-4

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: clear, colorless liquid. Flash Point: 15 deg C.

Warning! Flammable liquid and vapor. Causes eye, skin, and respiratory tract irritation. May be harmful if inhaled. Aspiration hazard if swallowed. Can enter lungs and cause damage. May cause central nervous system depression.

Target Organs: Central nervous system.

Potential Health Effects

Eye: Causes severe eye irritation. Causes redness and pain.

Skin: Causes skin irritation. Prolonged and/or repeated contact may cause irritation and/or dermatitis. May be absorbed through the skin. Causes redness and pain.

Ingestion: May cause irritation of the digestive tract. May cause gastrointestinal irritation with nausea, vomiting and diarrhea. May cause central nervous system depression, characterized by excitement, followed by headache, dizziness, drowsiness, and nausea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure. Aspiration of material into the lungs may cause chemical pneumonitis, which may be fatal.

Inhalation: Inhalation of high concentrations may cause central nervous system effects characterized by nausea, headache, dizziness, unconsciousness and coma. Causes respiratory tract irritation. Vapors may cause dizziness or suffocation.

Chronic: Chronic inhalation may cause effects similar to those of acute inhalation.

Section 4 - First Aid Measures

Eyes: Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid immediately.

Skin: Get medical aid. Flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse.

Ingestion: Do not induce vomiting. If victim is conscious and alert, give 2-4 cupfuls of milk or water. Never give anything by mouth to an unconscious person. Get medical aid immediately.

Inhalation: Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: Treat symptomatically and supportively.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion. Use water spray to keep fire-exposed containers cool. Flammable liquid and vapor. Vapors are heavier than air and may travel to a source of ignition and flash back. Vapors can spread along the ground and collect in low or confined areas. This liquid floats on water and may travel to a source of ignition and spread fire. May accumulate static electricity.

Extinguishing Media: Use water spray, dry chemical, carbon dioxide, or appropriate foam.

Flash Point: 15 deg C (59.00 deg F)

Autoignition Temperature: 432 deg C (809.60 deg F)

Explosion Limits, Lower:1.2%

Upper: 6.8%

NFPA Rating: (estimated) Health: 2; Flammability: 3; Instability: 0

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8. **Spills/Leaks:** Absorb spill with inert material (e.g. vermiculite, sand or earth), then place in suitable container. Remove all sources of ignition. Provide ventilation. Control runoff and isolate discharged material for proper disposal. Use water spray to cool and disperse vapors and protect personnel.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation. Ground and bond containers when transferring material. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Keep container tightly closed. Keep away from heat, sparks and flame. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames. Avoid breathing vapor or mist. **Storage:** Keep away from sources of ignition. Store in a tightly closed container. Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate general or local exhaust ventilation to keep airborne concentrations below the permissible exposure limits.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs

8/23/2021

Ethylbenzene 100 ppm TWA; 125 ppm 100 ppm TWA; 435 mg/m3 100 ppm TWA; 435 mg/m3 TWA 800 ppm IDLH TWA

OSHA Vacated PELs: Ethylbenzene: 100 ppm TWA; 435 mg/m3 TWA

Personal Protective Equipment Eyes: Wear chemical splash goggles.

Skin: Wear appropriate protective gloves to prevent skin exposure. **Clothing:** Wear appropriate protective clothing to prevent skin exposure.

Respirators: Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Section 9 - Physical and Chemical Properties

Physical State: Liquid
Appearance: clear, colorless

Odor: aromatic odor **pH:** Not available.

Vapor Pressure: 9.6 mm Hg @ 25 deg C

Vapor Density: 3.7 (air=1)

Evaporation Rate:<1 (butyl acetate=1)

Viscosity: 0.63 mPa s 20 C **Boiling Point:** 136 deg C

Freezing/Melting Point:-95 deg C

Decomposition Temperature: Not available.

Solubility: Insoluble.

Specific Gravity/Density:0.86 Molecular Formula:C8H10 Molecular Weight:106.17

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.

Conditions to Avoid: Ignition sources, excess heat.

Incompatibilities with Other Materials: Strong oxidizing agents.

Hazardous Decomposition Products: Carbon monoxide, carbon dioxide.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#:

CAS# 100-41-4: DA0700000

LD50/LC50: CAS# 100-41-4:

Draize test, rabbit, eye: 500 mg Severe; Inhalation, mouse: LC50 = 35500 mg/m3/2H; Inhalation, rat: LC50 = 55000 mg/m3/2H;

Oral, rat: LD50 = 3500 mg/kg; Oral, rat: LD50 = 3500 mg/kg; Skin, rabbit: LD50 = 17800 uL/kg;

Inhalation rat LC50: 17.2 mg/l/4H from BASF.

Carcinogenicity: CAS# 100-41-4:

• ACGIH: A3 - Confirmed animal carcinogen with unknown relevance to humans

California: carcinogen, initial date 6/11/04

• NTP: Not listed.

IARC: Group 2B carcinogen

Epidemiology: No information found **Teratogenicity:** No information found

Reproductive Effects: No information found

Mutagenicity: Mutation in mammalian somatic cells(Rodent, mouse) Lymphocyte = 80 mg/L.

Neurotoxicity: No information found

Other Studies:

Section 12 - Ecological Information

Ecotoxicity: Fish: Rainbow trout: LC50 = 14.0 mg/L; 96 Hr.; Static BioassayFish: Fathead Minnow: LC50 = 12.1 mg/L; 96 Hr.; Flow-through BioassayFish: Bluegill/Sunfish: LC50 = 150.0 mg/L; 96 Hr.; Static Bioassay, pH 6.5-7.9, 21-23 degrees CWater flea EC50 = 2.1 mg/L; 48 Hr.; Static BioassayWater flea EC50 = 75.0 mg/L; 48 Hr.; Static Bioassay Shrimp (mysidoposis bahia), LC50=87.6 mg/L/96hr. Sheepshead minnow LC50=275 mg/L/96hr. Fathead minnow LC50=42.3 mg/L/96hr in hard water &48.5 mg/L/96hr in softwater. Environmental: Experimental data on the bioconcentration of ethylbenzene include a log BCF of 1.9 in goldfish and the log BCF of 0.67 for clams exposed to the water-soluble fraction of crude oil. Using its octanol/water partition coefficient (log Kow= 3.15) and using a recommended regression equation, one can calculate a log BCF in fish of 2.16 indicating that ethylbenzene should not significantly bioconcentrate in aquatic organisms. Ethylbenzene has a moderate adsorption for soil. The measured Koc for silt loam was 164 Physical: The predominant photochemical reaction of ethylbenzene in the atmosphere is with hydroxyl radicals; the tropospheric half-life for this reaction is 5.5 and 24 hr in the summer and winter, actively. Degradation is somewhat faster under photochemical smog situations. Photooxidation products which have been identified include ethylphenol, benzaldehyde, acetophenone and m- and p-ethylnitrobenzene. Ethylbenzene is resistant to hydrolysis. Ethylbenzene does not significantly absorb light above 290 nm in methanol solution.

Other: No information available.

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed. RCRA U-Series: None listed.

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	ETHYLBENZENE	ETHYLBENZENE
Hazard Class:	3	3
UN Number:	UN1175	UN1175
Packing Group:	II	II
Additional Info:		FLASHPOINT 15 C

Section 15 - Regulatory Information

US FEDERAL

TSCA

CAS# 100-41-4 is listed on the TSCA inventory.

Health & Safety Reporting List

CAS# 100-41-4: Effective 6/19/87, Sunset 6/19/97

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

CAS# 100-41-4: 1000 lb final RQ; 454 kg final RQ

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPO.

SARA Codes

CAS # 100-41-4: immediate, delayed, fire.

Section 313

This material contains Ethylbenzene (CAS# 100-41-4, >99%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

Clean Air Act:

CAS# 100-41-4 is listed as a hazardous air pollutant (HAP).

This material does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors.

Clean Water Act:

CAS# 100-41-4 is listed as a Hazardous Substance under the CWA. CAS# 100-41-4 is listed as a Priority Pollutant under the Clean Water
Act. CAS# 100-41-4 is listed as a Toxic Pollutant under the Clean Water
Act.

OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

CAS# 100-41-4 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

California Prop 65

The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act:

WARNING: This product contains Ethylbenzene, a chemical known to the state of California to cause cancer. California No Significant Risk Level: None of the chemicals in this product are listed.

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols:

XN F

Risk Phrases:

R 11 Highly flammable.

R 20 Harmful by inhalation.

Safety Phrases:

S 16 Keep away from sources of ignition - No smoking.

S 24/25 Avoid contact with skin and eyes.

S 29 Do not empty into drains.

WGK (Water Danger/Protection)

CAS# 100-41-4: 1

Canada - DSL/NDSL

CAS# 100-41-4 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of B2, D2B, D2A.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

CAS# 100-41-4 is listed on the Canadian Ingredient Disclosure List.

Section 16 - Additional Information

MSDS Creation Date: 4/28/1999 **Revision #6 Date:** 11/29/2007

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.



Material Safety Data Sheet

Fluoranthene, 93%

MSDS# 01667

Section 1 - Chemical Product and Company Identification

MSDS Name: Fluoranthene, 93%

Catalog Numbers: AC345980000, AC345980010, AC345982500

Synonyms:

Acros Organics BVBA Company Identification:

Janssen Pharmaceuticalaan 3a

2440 Geel, Belgium

Acros Organics

One Reagent Lane Company Identification: (USA)

Fair Lawn, NJ 07410

For information in the US, call: 800-ACROS-01 For information in Europe, call: +32 14 57 52 11 Emergency Number, Europe: +32 14 57 52 99

Emergency Number US: 201-796-7100 CHEMTREC Phone Number, US: 800-424-9300

CHEMTREC Phone Number, Europe: 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#: 206-44-0 Chemical Name: Fluoranthene

%: 93%

EINECS#: 205-912-4

Hazard Symbols: XN



Risk Phrases: 22

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Not available Target Organs: None known.

Potential Health Effects

Eye: May cause eye irritation. Skin: May cause skin irritation.

Ingestion: Harmful if swallowed. May cause irritation of the digestive tract.

Inhalation: May cause respiratory tract irritation.

Chronic:

Section 4 - First Aid Measures

Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get Eyes:

medical aid.

Get medical aid. Flush skin with plenty of water for at least 15 minutes while removing contaminated Skin:

clothing and shoes.

Ingestion: Get medical aid. Wash mouth out with water.

Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If Inhalation:

breathing is difficult, give oxygen. Get medical aid.

Notes to Physician:

Section 5 - Fire Fighting Measures

As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH General Information:

(approved or equivalent), and full protective gear.

Extinguishing Media: In case of fire, use water, dry chemical, chemical foam, or alcohol-resistant foam.

Autoignition Temperature: Not available

Flash Point: > 100 deg C (> 212.00 deg F)

Explosion Limits: Not available Lower:

Explosion Limits: Upper: Not available

NFPA Rating: Not published

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks: Vacuum or sweep up material and place into a suitable disposal container.

Section 7 - Handling and Storage

Avoid breathing dust, mist, or vapor. Avoid contact with skin and eyes. Handling:

Store in a cool, dry place. Store in a tightly closed container. Storage:

Section 8 - Exposure Controls, Personal Protection

Chemical Name	+	+	++ OSHA - Final PELs
Fluoranthene	 none listed +	none listed	none listed

OSHA Vacated PELs: Fluoranthene: None listed

Engineering Controls:

Use adequate ventilation to keep airborne concentrations low.

Exposure Limits

Personal Protective Equipment

Not available Eyes:

Skin: Wear appropriate protective gloves and clothing to prevent skin exposure.

Wear appropriate protective clothing to minimize contact with skin. Clothing:

Wear a NIOSH/MSHA or European Standard EN 149 approved full-facepiece airline respirator in the Respirators:

positive pressure mode with emergency escape provisions.

Section 9 - Physical and Chemical Properties

Physical State: Crystalline powder

Color: yellow

Odor: odorless

pH: Not available

Vapor Pressure: Not available

Vapor Density: Not available

Evaporation Rate: Not available

Viscosity: Not available

Boiling Point: 380 - 34.0 deg C @

Freezing/Melting Point: 109.00 - 111 Decomposition Temperature: Not available

Solubility in water: insoluble

Specific Gravity/Density:

Molecular Formula: C16H10 Molecular Weight: 202.07

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.

Conditions to Avoid: Incompatible materials.

Incompatibilities with Other Materials

Not available

Hazardous Decomposition Products Carbon monoxide, carbon dioxide.

Hazardous Polymerization Has not been reported.

Section 11 - Toxicological Information

RTECS#: CAS# 206-44-0: LL4025000

RTECS:

LD50/LC50: CAS# 206-44-0: Oral, rat: LD50 = 2 gm/kg;

Skin, rabbit: LD50 = 3180 mg/kg;

.

Carcinogenicity: Fluoranthene - IARC: Group 3 (not classifiable)

Other: The toxicological properties have not been fully investigated. See actual entry in RTECS for complete

information.

Section 12 - Ecological Information

Other: No information available.

Section 13 - Disposal Considerations

Dispose of in a manner consistent with federal, state, and local regulations.

Section 14 - Transport Information

US DOT

Shipping Name: Please contact Fisher Scientific for shipping information

Hazard Class: UN Number: Packing Group: Canada TDG

Shipping Name: Not available

Hazard Class: UN Number: Packing Group:

USA RQ: CAS# 206-44-0: 100 lb final RQ; 45.4 kg final RQ

Section 15 - Regulatory Information

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols: XN

Risk Phrases:

R 22 Harmful if swallowed.

Safety Phrases:

WGK (Water Danger/Protection)

CAS# 206-44-0: Not available

Canada

CAS# 206-44-0 is listed on Canada's NDSL List

Canadian WHMIS Classifications: Not available

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

CAS# 206-44-0 is listed on Canada's Ingredient Disclosure List

US Federal

TSCA

CAS# 206-44-0 is listed on the TSCA Inventory.

Section 16 - Other Information MSDS Creation Date: 10/27/1999 Revision #5 Date 7/20/2009

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantibility or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall the company be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential, or exemplary damages howsoever arising, even if the company has been advised of the possibility of such damages.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 01.23.2015 Page 1 of 7

Iron Powder

SECTION 1: Identification of the substance/mixture and of the supplier

Product name : Iron Powder

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: \$25370A

Recommended uses of the product and uses restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific 9 Barnhart Drive, Hanover, PA 17331

Supplier Details:

Fisher Science Education 15 Jet View Drive, Rochester, NY 14624

Emergency telephone number:

Fisher Science Education Emergency Telephone No.: 800-535-5053

SECTION 2: Hazards identification

Classification of the substance or mixture:



Flammable

Flammable solids, category 1 Self-heating substances and mixtures, category 1

Flam. Sol. 1 Self-heat. 1

Hazards Not Otherwise Classified - Combustible Dust

Signal word: Danger

Hazard statements:

Flammable solid

Self-heating; may catch fire

Precautionary statements:

If medical advice is needed, have product container or label at hand

Keep out of reach of children

Read label before use

Keep away from heat/sparks/open flames/hot surfaces. No smoking

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/light/equipment

Wear protective gloves/protective clothing/eye protection/face protection

Do not eat, drink or smoke when using this product

Combustible Dust Hazard::

May form combustible dust concentrations in air (during processing).

Other Non-GHS Classification:

WHMIS

Effective date: 01.23.2015 Page 2 of 7

Iron Powder





NFPA/HMIS





HMIS RATINGS (0-4)

SECTION 3: Composition/information on ingredients

Ingredients:		
CAS 7439-89-6	Iron	>97 %
		Percentages are by weight

SECTION 4: First aid measures

Description of first aid measures

After inhalation: Move exposed individual to fresh air. Loosen clothing as necessary and position individual in a comfortable position. Seek medical advice if discomfort or irritation persists. If breathing difficult, give oxygen.

After skin contact: Wash affected area with soap and water. Rinse/flush exposed skin gently using water for 15-20 minutes. Seek medical advice if discomfort or irritation persists.

After eye contact: Protect unexposed eye. Rinse/flush exposed eye(s) gently using water for 15-20 minutes. Remove contact lens(es) if able to do so during rinsing. Seek medical attention if irritation persists or if concerned.

After swallowing: Rinse mouth thoroughly. Do not induce vomiting. Have exposed individual drink sips of water. Seek medical attention if irritation, discomfort or vomiting persists.

Most important symptoms and effects, both acute and delayed:

Irritation, Nausea, Headache, Shortness of breath.;

Indication of any immediate medical attention and special treatment needed:

If seeking medical attention, provide SDS document to physician.

SECTION 5 : Firefighting measures

Extinguishing media

Suitable extinguishing agents: If in laboratory setting, follow laboratory fire suppression procedures. Use appropriate fire suppression agents for adjacent combustible materials or sources of ignition

For safety reasons unsuitable extinguishing agents:

Special hazards arising from the substance or mixture:

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 01.23.2015 Page 3 of 7

Iron Powder

Combustion products may include carbon oxides or other toxic vapors. Thermal decomposition can lead to release of irritating gases and vapors. Avoid generating dust; fine dust dispersed in air in sufficient concentrations, and in the presence of an ignition source is a potential dust explosion hazard.

Advice for firefighters:

Protective equipment: Use NIOSH-approved respiratory protection/breathing apparatus.

Additional information (precautions): Move product containers away from fire or keep cool with water spray as a protective measure, where feasible. Use spark-proof tools and explosion-proof equipment.

SECTION 6: Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Wear protective equipment. Transfer to a disposal or recovery container. Use spark-proof tools and explosion-proof equipment. Use respiratory protective device against the effects of fumes/dust/aerosol. Keep unprotected persons away. Ensure adequate ventilation. Keep away from ignition sources. Protect from heat. Stop the spill, if possible. Contain spilled material by diking or using inert absorbent.

Environmental precautions:

Prevent from reaching drains, sewer or waterway. Collect contaminated soil for characterization per Section 13

Methods and material for containment and cleaning up:

If in a laboratory setting, follow Chemical Hygiene Plan procedures. Place into properly labeled containers for recovery or disposal. If necessary, use trained response staff/contractor. Dust deposits should not be allowed to accumulate on surfaces, as these may form an explosive mixture if they are released into the atmosphere in sufficient concentration. Avoid dispersal of dust in the air (i.e., clearing dust surfaces with compressed air). Collect solids in powder form using vacuum with (HEPA filter)

Reference to other sections:

SECTION 7 : Handling and storage

Precautions for safe handling:

Minimize dust generation and accumulation. Wash hands after handling. Routine housekeeping should be instituted to ensure that dusts do not accumulate on surfaces. Dry powders can build static electricity charges when subjected to the friction of transfer and mixing operations. Follow good hygiene procedures when handling chemical materials. Use only in well ventilated areas. Avoid contact with eyes, skin, and clothing.

Conditions for safe storage, including any incompatibilities:

Provide ventilation for containers. Avoid storage near extreme heat, ignition sources or open flame. Store away from foodstuffs. Store away from oxidizing agents. Store in cool, dry conditions in well sealed containers. Store with like hazards

SECTION 8: Exposure controls/personal protection





Control Parameters:

, , OSHA PEL TWA (Total Dust) 15 mg/m3 (50 mppcf*) , , ACGIH TLV TWA (inhalable particles) 10 mg/m3

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 01.23.2015 Page 4 of 7

Iron Powder

Appropriate Engineering controls: Emergency eye wash fountains and safety showers should be available in the immediate vicinity of use/handling. Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor or dusts (total/respirable) below the applicable workplace exposure limits (Occupational Exposure Limits-OELs) indicated above. Use under a fume hood. It is recommended that all dust control equipment such as local exhaust ventilation and material transport systems involved in handling of this product contain explosion relief vents or an explosion suppression system or an oxygen deficient environment. Ensure that dust-handling systems (such as exhaust ducts, dust collectors, vessels, and processing equipment) are designed in a manner to prevent the escape of dust into

the work area (i.e., there is no leakage from the equipment).

Respiratory protection: Not required under normal conditions of use. Use suitable respiratory

> protective device when high concentrations are present. Use suitable respiratory protective device when aerosol or mist is formed. For spills,

respiratory protection may be advisable.

Protection of skin: The glove material has to be impermeable and resistant to the product/

> the substance/ the preparation being used/handled. Selection of the glove material on consideration of the penetration times, rates of diffusion and

the degradation.

Eye protection: Safety glasses with side shields or goggles.

General hygienic measures: The usual precautionary measures are to be adhered to when handling

> chemicals. Immediately remove all soiled and contaminated clothing. Wash hands before breaks and at the end of work. Do not inhale gases/fumes/dust/mist/vapor/aerosols. Avoid contact with the eyes and

skin.

SECTION 9: Physical and chemical properties

Appearance (physical state,color):	Black to gray solid	Explosion limit lower: Explosion limit upper:	Not Determined Not Determined
Odor:	Odorless	Vapor pressure:	1 mm Hg @ 1787C
Odor threshold:	Not Determined	Vapor density:	Not Determined
pH-value:	Not Determined	Relative density:	7.86 @ 20C
Melting/Freezing point:	1535C	Solubilities:	Insoluble in water.
Boiling point/Boiling range:	2750C	Partition coefficient (noctanol/water):	Not Determined
Flash point (closed cup):	Not Determined	Auto/Self-ignition temperature:	Not Determined
Evaporation rate:	Not Determined	Decomposition temperature:	Not Determined
Flammability (solid,gaseous):	Not Determined	Viscosity:	a. Kinematic:Not Determined b. Dynamic: Not Determined

Density: Not Determined Iron: Molecular Weight: 55.847

SECTION 10: Stability and reactivity

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 01.23.2015 Page 5 of 7

Iron Powder

Reactivity:

Chemical stability:Decomposes when heated. Oxidizes when exposed to air.

Possible hazardous reactions:

Conditions to avoid:Store away from oxidizing agents, strong acids or bases.Incompatible materials, moisture, exposure to air, excess heat.

Incompatible materials:Strong acids.Strong bases. **Hazardous decomposition products:**Oxides of iron

SECTION 11: Toxicological information

Acute Toxici	ty:			
Oral:	30 mg/kg	LD50 orl - rat		
Chronic Toxi	city : No additional information.			
Corrosion Irritation: No additional information.				
Sensitization:		No additional information.		
Single Target Organ (STOT):		No additional information.		
Numerical Measures:		No additional information.		
Carcinogenicity:		No additional information.		
Mutagenicity	y :	No additional information.		
Reproductive	e Toxicity:	No additional information.		

SECTION 12: Ecological information

Ecotoxicity Persistence and degradability: Readily degradable in the environment.

Bioaccumulative potential:

Mobility in soil:

Other adverse effects:

SECTION 13: Disposal considerations

Waste disposal recommendations:

Product/containers must not be disposed together with household garbage. Do not allow product to reach sewage system or open water. It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11). Consult federal state/ provincial and local regulations regarding the proper disposal of waste material that may incorporate some amount of this product.

SECTION 14: Transport information

UN-Number

3089

UN proper shipping name

METAL POWDERS, FLAMM ABLE, N.O.S.

Transport hazard class(es)

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 01.23.2015 Page 6 of 7

Iron Powder



4.1 Flammable solids, self-reactive substances and solid desensitized explosives

Packing group: II

Environmental hazard:

Transport in bulk:

Special precautions for user:

SECTION 15: Regulatory information

United States (USA)

SARA Section 311/312 (Specific toxic chemical listings):

None of the ingredients is listed

SARA Section 313 (Specific toxic chemical listings):

None of the ingredients is listed

RCRA (hazardous waste code):

None of the ingredients is listed

TSCA (Toxic Substances Control Act):

All ingredients are listed.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

None of the ingredients is listed

Proposition 65 (California):

Chemicals known to cause cancer:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for females:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for males:

None of the ingredients is listed

Chemicals known to cause developmental toxicity:

None of the ingredients is listed

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

None of the ingredients is listed

Canadian NPRI Ingredient Disclosure list (limit 1%):

None of the ingredients is listed

SECTION 16: Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations.Note:. The responsibility to provide a safe workplace remains with the user.The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 01.23.2015 Page 7 of 7

Iron Powder

employees and develop work practice procedures for a safe work environment. The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material. It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases:

Abbreviations and acronyms:

IMDG: International Maritime Code for Dangerous Goods

PNEC: Predicted No-Effect Concentration (REACH)

CFR: Code of Federal Regulations (USA)

SARA: Superfund Amendments and Reauthorization Act (USA)

RCRA: Resource Conservation and Recovery Act (USA)

TSCA: Toxic Substances Control Act (USA)

NPRI: National Pollutant Release Inventory (Canada)

DOT: US Department of Transportation IATA: International Air Transport Association

GHS: Globally Harmonized System of Classification and Labelling of Chemicals

ACGIH: American Conference of Governmental Industrial Hygienists

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA) HMIS: Hazardous Materials Identification System (USA)

WHMIS: Workplace Hazardous Materials Information System (Canada)

DNEL: Derived No-Effect Level (REACH)

Effective date : 01.23.2015 **Last updated** : 03.19.2015



SAFETY DATA SHEET

Creation Date 16-Apr-2012 Revision Date 19-Jan-2018 Revision Number 3

1. Identification

Product Name Cumene

Cat No.: AC329730000; AC329730025; AC329730050; AC329735000

CAS-No 98-82-8

Synonyms Isopropylbenzene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids

Acute oral toxicity

Skin Corrosion/Irritation

Serious Eye Damage/Eye Irritation

Category 2

Carcinogenicity

Category 2

Carcinogenicity

Category 2

Specific target organ toxicity (single exposure)

Category 3

Target Organs - Respiratory system.

Aspiration Toxicity Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Flammable liquid and vapor

Cumene Revision Date 19-Jan-2018

Harmful if swallowed
Causes skin irritation
Causes eye irritation
Suspected of causing cancer
May cause respiratory irritation
May be fatal if swallowed and enters airways



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Wear protective gloves/protective clothing/eye protection/face protection

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Response

Call a POISON CENTER or doctor/physician if you feel unwell

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

Take off contaminated clothing and wash before reuse

IF ON SKIN: Wash with plenty of soap and water

If skin irritation occurs: Get medical advice/attention

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Ingestion

Rinse mouth

Do NOT induce vomiting

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Fire

Fight fire with normal precautions from a reasonable distance

Evacuate area

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Toxic to aquatic life with long lasting effects

WARNING. Cancer - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

	Component	CAS-No	Weight %
--	-----------	--------	----------

Revision Date 19-Jan-2018 Cumene

Cumene	98-82-8	>95

4. First-aid measures

General Advice If symptoms persist, call a physician.

Eve Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Get medical attention.

Remove to fresh air. Get medical attention. If not breathing, give artificial respiration. Risk of Inhalation

serious damage to the lungs (by aspiration).

Do NOT induce vomiting. Get medical attention. Call a physician or poison control center Ingestion

immediately. If vomiting occurs naturally, have victim lean forward.

Most important symptoms and

effects

Notes to Physician

Difficulty in breathing. Symptoms of overexposure may be headache, dizziness, tiredness,

nausea and vomiting Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Water spray, carbon dioxide (CO2), dry chemical, alcohol-resistant foam. Water mist may

be used to cool closed containers.

Unsuitable Extinguishing Media Do not use a solid water stream as it may scatter and spread fire

Flash Point 31 °C / 87 °F

Method -No information available

Autoignition Temperature 424 °C / 795 °F

Explosion Limits

Upper No data available No data available Lower Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Containers may explode when heated. Vapors may form explosive mixtures with air.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO2).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health **Flammability** Instability Physical hazards 3 2 0 N/A

Accidental release measures

Personal Precautions Use personal protective equipment as required. Ensure adequate ventilation. Remove all

sources of ignition. Take precautionary measures against static discharges.

Do not flush into surface water or sanitary sewer system. **Environmental Precautions**

Revision Date 19-Jan-2018 Cumene

Methods for Containment and Clean Keep in suitable, closed containers for disposal. Soak up with inert absorbent material.

Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment. Take

precautionary measures against static discharges.

7. Handling and storage

Wear personal protective equipment/face protection. Ensure adequate ventilation. Do not Handling

get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. Take precautionary measures against static discharges. Use spark-proof tools and

explosion-proof equipment.

Storage Keep container tightly closed in a dry and well-ventilated place. Keep away from heat,

sparks and flame. Flammables area.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Cumene	TWA: 50 ppm	(Vacated) TWA: 50 ppm	IDLH: 900 ppm	TWA: 50 ppm
		(Vacated) TWA: 245 mg/m ³	TWA: 50 ppm	
		Skin	TWA: 245 mg/m ³	
		TWA: 50 ppm		
		TWA: 245 mg/m ³		

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: NIOSH - National Institute for Occupational Safety and Health

Engineering Measures Ensure that eyewash stations and safety showers are close to the workstation location.

Ensure adequate ventilation, especially in confined areas. Use explosion-proof

electrical/ventilating/lighting/equipment.

Personal Protective Equipment

Tight sealing safety goggles. Face protection shield. **Eye/face Protection**

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard **Respiratory Protection**

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

Physical and chemical properties

Physical State Liquid Colorless **Appearance**

No information available Odor **Odor Threshold** No information available рΗ No information available **Melting Point/Range** -96 °C / -141 °F

Boiling Point/Range 152 - 154 °C / 306 - 309 °F

Flash Point 31 °C / 87 °F

Evaporation Rate No information available

Flammability (solid,gas) Not applicable

Cumene Revision Date 19-Jan-2018

Flammability or explosive limits

Upper
LowerNo data availableVapor Pressure5.3 hPa @ 20 °CVapor DensityNo information available

Specific Gravity 0.862

SolubilityNo information availablePartition coefficient; n-octanol/waterNo data availableAutoignition Temperature424 °C / 795 °FDecomposition TemperatureNo information availableViscosity0.79 mPa.s at 20 °C

Molecular FormulaC9 H12Molecular Weight120.19

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Excess heat. Incompatible products. Keep away from open flames, hot surfaces and

sources of ignition.

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Cumene	1400 mg/kg(Rat) 2700 mg/kg(Rat)	LD50 = 12300 μL/kg(Rabbit)	LC50 > 3577 ppm (Rat) 6 h LC50 = 39000 mg/m ³ (Rat) 4 h

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Irritating to eyes, respiratory system and skin

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Cumene	98-82-8	Group 2B	Reasonably Anticipated	Not listed	Х	Not listed

IARC (International Agency for Research on Cancer)

IARC (International Agency for Research on Cancer)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans Group 2B - Possibly Carcinogenic to Humans

Mutagenic Effects No information available

Reproductive Effects No information available.

Cumene Revision Date 19-Jan-2018

Developmental EffectsNo information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system

STOT - repeated exposure None known

Aspiration hazard Category 1

Symptoms / effects, both acute and Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

delayed

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

The product contains following substances which are hazardous for the environment. Contains a substance which is:. Very toxic to aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Cumene	EC50: = 2.6 mg/L, 72h	LC50: = 2.7 mg/L, 96h	EC50 = 0.89 mg/L 5 min	EC50: 7.9 - 14.1 mg/L, 48h
	(Pseudokirchneriella	semi-static (Oncorhynchus	EC50 = 1.10 mg/L 15 min	Static (Daphnia magna)
	subcapitata)	mykiss)	EC50 = 1.48 mg/L 30 min	EC50: = 0.6 mg/L, 48h
		LC50: = 4.8 mg/L, 96h	EC50 = 172 mg/L 24 h	(Daphnia magna)
		flow-through (Oncorhynchus		
		mykiss)		
		LC50: 6.04 - 6.61 mg/L, 96h		
		flow-through (Pimephales		
		promelas)		
		LC50: = 5.1 mg/L, 96h		
		semi-static (Poecilia		
		reticulata)		

Persistence and Degradability Persistence is unlikely

Bioaccumulation/ Accumulation No information available.

Mobility . Is not likely mobile in the environment due its low water solubility.

	Component	log Pow
Γ	Cumene	3.7

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Cumene - 98-82-8	U055	-

14. Transport information

DOT

UN-No UN1918

Proper Shipping Name ISOPROPYLBENZENE

Hazard Class 3
Packing Group III

TDG

Revision Date 19-Jan-2018

Cumene

UN-No UN1918

Proper Shipping Name ISOPROPYLBENZENE

Hazard Class 3
Packing Group III

<u>IATA</u>

UN-No UN1918

Proper Shipping Name ISOPROPYLBENZENE

Hazard Class 3 Packing Group III

IMDG/IMO

UN-No UN1918

Proper Shipping Name ISOPROPYLBENZENE

Hazard Class 3
Packing Group III

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Cumene	98-82-8	X	ACTIVE	_

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed '-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Cumene	98-82-8	Х	-	202-704-5	Χ	X	Х	Х	KE-23957

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Cumene	98-82-8	>95	1.0

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Clean Air Act

0.04.1.7.11.7.01			
Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Cumene	X		-

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Cumene	5000 lb	-

Cumene Revision Date 19-Jan-2018

California Proposition 65

This product contains the following Proposition 65 chemicals.

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Cumene	98-82-8	Carcinogen	-	Carcinogen

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Cumene	X	X	X	X	Х

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade Serious risk, Grade 3

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 16-Apr-2012

 Revision Date
 19-Jan-2018

 Print Date
 19-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

Material Safety Data Sheet Magnesium, turnings and ribbons

ACC# 13290

Section 1 - Chemical Product and Company Identification

MSDS Name: Magnesium, turnings and ribbons

Catalog Numbers: AC191080000, AC191080025, AC191085000, S72223D, S72233D, S75532, S75551,

S755511, S755512, M11-500, M8-10Z, M8-212, NC9327500

Synonyms: Magnesium metal (ribbons/turnings)

Company Identification:
Fisher Scientific

1 Reagent Lane Fair Lawn, NJ 07410

For information, call: 201-796-7100 Emergency Number: 201-796-7100

For CHEMTREC assistance, call: 800-424-9300

For International CHEMTREC assistance, call: 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
7439-95-4	Magnesium	>99	231-104-6

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: silver white solid.

Warning! Flammable solid. Water-reactive. Contact with water liberates extremely flammable gases. May cause eye and skin irritation. May cause respiratory tract irritation. Inhalation of fumes may cause metal-fume fever. Air sensitive.

Target Organs: None.

Potential Health Effects

Eye: Dust may cause mechanical irritation.

Skin: Dust may cause mechanical irritation. May be harmful if absorbed through the skin. Particles embedded in the skin may cause "chemical gas gangrene" with symptoms of persistent lesions, inflammation and gas bubbles under the skin.

Ingestion: May cause irritation of the digestive tract. Low hazard for usual industrial handling.

Inhalation: May cause respiratory tract irritation. Inhalation of fumes may cause metal fume fever, which is characterized by flu-like symptoms with metallic taste, fever, chills, cough, weakness, chest pain, muscle pain and increased white blood cell count. May be harmful if inhaled.

Chronic: No information found.

Section 4 - First Aid Measures

Eyes: Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.

Skin: Get medical aid. Immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.

Ingestion: If victim is conscious and alert, give 2-4 cupfuls of milk or water. Get medical aid immediately. **Inhalation:** Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: The use of calcium gluconate as antidotal treatment for magnesium over dose should be determined only by qualified medical personnel (Medical Toxicology, 1988).

Antidote: The use of Dimercaprol or BAL (British Anti-Lewisite) as a chelating agent should be determined by qualified medical personnel.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Water reactive. Material will react with water and may release a flammable and/or toxic gas. This material in sufficient quantity and reduced particle size is capable of creating a dust explosion. Flammable solid. May react with acids or moisture to form explosive hydrogen gas.

Extinguishing Media: Use approved class D extinguishing agents or smother with dry sand, clay, or sodium bicarbonate. Do NOT use water, carbon dioxide, or foam.

Flash Point: Not applicable.

Autoignition Temperature: 472.8 deg C (883.04 deg F)

Explosion Limits, Lower: Not available.

Upper: Not available.

NFPA Rating: (estimated) Health: 0; Flammability: 1; Instability: 1

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8. **Spills/Leaks:** Scoop up with a nonsparking tool, then place into a suitable container for disposal. Avoid generating dusty conditions. Remove all sources of ignition. Place under an inert atmosphere.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation. Ground and bond containers when transferring material. Use spark-proof tools and explosion proof equipment. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Avoid ingestion and inhalation. Store protected from air. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames.

Storage: Keep away from sources of ignition. Store in a tightly closed container. Store in a cool, dry, well-ventilated area away from incompatible substances. Water free area.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
Magnesium	none listed	none listed	none listed

OSHA Vacated PELs: Magnesium: No OSHA Vacated PELs are listed for this chemical.

Personal Protective Equipment

Eyes: Wear chemical splash goggles and face shield.

Skin: Wear impervious gloves.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Section 9 - Physical and Chemical Properties

Physical State: Solid
Appearance: silver white
Odor: none reported
pH: >7 (water solution)
Vapor Pressure: Negligible.
Vapor Density: Negligible.
Evaporation Rate:Negligible.
Viscosity: Not available.
Boiling Point: 1107.2 deg C
Freezing/Melting Point:650 deg C

Decomposition Temperature: Not available.

Solubility: Insoluble in water. **Specific Gravity/Density:**1.74

Molecular Formula:Mg Molecular Weight:24.3

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures. Air sensitive. Reacts with water.

Conditions to Avoid: Ignition sources, exposure to air, contact with water.

Incompatibilities with Other Materials: Strong oxidizing agents, acids, acid chlorides, chlorinated

solvents, halogens.

Hazardous Decomposition Products: Oxides of magnesium.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#:

CAS# 7439-95-4: FW6475100

LD50/LC50: Not available.

Carcinogenicity:

CAS# 7439-95-4: Not listed by ACGIH, IARC, NTP, or CA Prop 65.

Epidemiology: No data available. **Teratogenicity:** No data available.

Reproductive Effects: No data available.

Mutagenicity: No data available. **Neurotoxicity:** No data available.

Other Studies:

Section 12 - Ecological Information

Ecotoxicity: No data available. No information available.

Environmental: No information avialable.

Physical: No information available.

Other: None.

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed. RCRA U-Series: None listed.

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	MAGNESIUM	MAGNESIUM
Hazard Class:	4.1	4.1
UN Number:	UN1869	UN1869
Packing Group:	III	III

Section 15 - Regulatory Information

US FEDERAL

TSCA

CAS# 7439-95-4 is listed on the TSCA inventory.

Health & Safety Reporting List

None of the chemicals are on the Health & Safety Reporting List.

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

None of the chemicals in this material have an RQ.

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPQ.

SARA Codes

CAS # 7439-95-4: immediate, fire, reactive.

Section 313 No chemicals are reportable under Section 313.

Clean Air Act:

This material does not contain any hazardous air pollutants.

This material does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors.

Clean Water Act:

None of the chemicals in this product are listed as Hazardous Substances under the CWA.

None of the chemicals in this product are listed as Priority Pollutants under the CWA. None of the chemicals in this product are listed as Toxic Pollutants under the CWA.

OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

CAS# 7439-95-4 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Massachusetts.

California Prop 65

California No Significant Risk Level: None of the chemicals in this product are listed.

European/International Regulations European Labeling in Accordance with EC Directives Hazard Symbols:

F

Risk Phrases:

R 11 Highly flammable.

R 15 Contact with water liberates extremely flammable gases.

Safety Phrases:

S 7/8 Keep container tightly closed and dry.

S 43A In case of fire, use dry chemical (never use water).

WGK (Water Danger/Protection)

CAS# 7439-95-4: No information available.

Canada - DSL/NDSL

CAS# 7439-95-4 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of B4.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

Section 16 - Additional Information

MSDS Creation Date: 12/12/1997 **Revision #7 Date:** 11/05/2007

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.



SAFETY DATA SHEET

Creation Date 24-Nov-2010 Revision Date 19-Jan-2018 Revision Number 3

1. Identification

Product Name Manganese, powder, -325 mesh

Cat No.: AC317440000; AC317440010; AC317442500

CAS-No 7439-96-5

Synonyms No information available

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable solids Category 2
Serious Eye Damage/Eye Irritation Category 2

Label Elements

Signal Word

Warning

Hazard Statements

Flammable solid

Causes serious eye irritation



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling Keep away from heat/sparks/open flames/hot surfaces. - No smoking Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Wear protective gloves/protective clothing/eye protection/face protection

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

In case of fire: Use CO2, dry chemical, or foam for extinction

Hazards not otherwise classified (HNOC)

None identified

0 0			
+ 1 0 0	nacitian/	Intormation	on ingredients
J. CUIII	DUSILIUH	ппоппапоп	on Ingredients

Component	CAS-No	Weight %
Manganese	7439-96-5	>95

4. First-aid measures

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get **Eye Contact**

medical attention.

Wash off immediately with soap and plenty of water while removing all contaminated Skin Contact

clothes and shoes. Get medical attention.

Inhalation Remove from exposure, lie down. Remove to fresh air. If breathing is difficult, give oxygen.

If not breathing, give artificial respiration. Get medical attention.

Clean mouth with water. Get medical attention. Ingestion

Most important symptoms and

effects

No information available.

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Dry chemical.

Unsuitable Extinguishing Media No information available

No information available **Flash Point** Method -No information available

Autoignition Temperature

Explosion Limits

No information available

Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Combustible material.

Hazardous Combustion Products

None known.

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

HealthFlammabilityInstabilityPhysical hazards220N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment as required.

Environmental Precautions See Section 12 for additional Ecological Information.

Methods for Containment and Clean Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

Up Sweep up and shovel into suitable containers for disposal.

7. Handling and storage

Handling Avoid contact with skin and eyes. Do not breathe dust. Use spark-proof tools and

explosion-proof equipment. Use only non-sparking tools.

Storage Keep in a dry, cool and well-ventilated place. Refer product specification and/or product

label for specific storage temperature requirement. Keep container tightly closed. Keep

away from heat, sparks and flame. Keep under nitrogen.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Manganese	TWA: 0.02 mg/m ³	(Vacated) TWA: 1 mg/m ³	IDLH: 500 mg/m ³	TWA: 0.2 mg/m ³
	TWA: 0.1 mg/m ³	Ceiling: 5 mg/m ³	TWA: 1 mg/m ³	TWA: 1 mg/m ³
	_	(Vacated) STEL: 3 mg/m ³	STEL: 3 mg/m ³	_
		(Vacated) Ceiling: 5 mg/m ³	_	

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: NIOSH - National Institute for Occupational Safety and Health

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection No protective equipment is needed under normal use conditions.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State Powder Solid Appearance Dark brown

Odor

No information available
Odor Threshold
No information available
PH
No information available
No information available

Melting Point/Range 1260 °C / 2300 °F
Boiling Point/Range 1900 °C / 3452 °F
Flash Point No information available
Evaporation Rate Not applicable

Flammability (solid,gas)

No information available

Flammability or explosive limits

UpperNo data availableLowerNo data availableVapor PressureNo information availableVapor DensityNot applicable

Specific Gravity

No information available

No information available

No information available

Partition coefficient; n-octanol/water

Autoignition Temperature

No data available
No information available

Autoignition TemperatureNo information availableDecomposition TemperatureNo information available

Viscosity Not applicable

Molecular FormulaMnMolecular Weight54.94

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Moisture sensitive.

Conditions to Avoid Incompatible products. Exposure to moisture.

Incompatible Materials Acids, Bases, Halogens

Hazardous Decomposition Products None under normal use conditions

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Manganese	LD50 = 9 g/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Revision Date 19-Jan-2018

Manganese, powder, -325 mesh

Sensitization No information available

The table below indicates whether each agency has listed any ingredient as a carcinogen. Carcinogenicity

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Manganese	7439-96-5	Not listed				

Mutagenic Effects No information available

No information available. **Reproductive Effects**

Developmental Effects No information available.

No information available. **Teratogenicity**

STOT - single exposure None known STOT - repeated exposure None known

No information available **Aspiration hazard**

Symptoms / effects, both acute and No information available

delayed

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for

complete information.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Manganese	Not listed	LC50: > 3.6 mg/L, 96h semi-static (Oncorhynchus mykiss)	Not listed	Not listed

Persistence and Degradability Insoluble in water

No information available. **Bioaccumulation/ Accumulation**

Mobility Is not likely mobile in the environment due its low water solubility.

13. Disposal considerations

Chemical waste generators must determine whether a discarded chemical is classified as a **Waste Disposal Methods**

hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN3089 **UN-No**

Proper Shipping Name Metal powder, flammable, n.o.s.

Technical Name Manganese

Hazard Class 4.1 **Packing Group** Ш

TDG

UN-No UN3089

Proper Shipping Name Metal powder, flammable, n.o.s.

Hazard Class 4.1 **Packing Group** Ш

IATA

UN-No UN3089

Proper Shipping Name Metal powder, flammable, n.o.s.

Hazard Class 4. Packing Group

IMDG/IMO

UN-No UN3089

Proper Shipping Name Metal powder, flammable, n.o.s.

Hazard Class 4.1
Packing Group

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Manganese	7439-96-5	X	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed '-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Manganese	7439-96-5	Х	-	231-105-1	Х	Х	Х	Χ	KE-22999

U.S. Federal Regulations

SARA 313

CALLA CIC			
Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Manganese	7439-96-5	>95	1.0

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Manganese	Χ		-

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA Not applicable

California Proposition 65 This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Manganese	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 24-Nov-2010

 Revision Date
 19-Jan-2018

 Print Date
 19-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Revision Date 19-Jan-2018 Revision Number 3

1. Identification

Product Name Naphthalene-d8

Cat No.: AC174960000; AC174960010; AC174960050

Synonyms (2H8)Naphthalene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Acute oral toxicity

Acute dermal toxicity

Acute Inhalation Toxicity - Dusts and Mists

Category 4

Combustible dust

Category 4

Category 4

Category 4

Category 4

Label Elements

Signal Word

Warning

Hazard Statements

May form combustible dust concentrations in air Harmful if swallowed, in contact with skin or if inhaled

·



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Wear protective gloves/protective clothing/eye protection/face protection

Avoid breathing dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Call a POISON CENTER or doctor/physician if you feel unwell

Skin

IF ON SKIN: Wash with plenty of soap and water

Call a POISON CENTER or doctor/physician if you feel unwell

Wash contaminated clothing before reuse

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

Rinse mouth

Storage

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

None identified

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
(2H8)Naphthalene	1146-65-2	100

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

clothes and shoes. In the case of skin irritation or allergic reactions see a physician.

Inhalation Remove from exposure, lie down. Remove to fresh air. If symptoms persist, call a

physician. If not breathing, give artificial respiration.

Ingestion Never give anything by mouth to an unconscious person. Drink plenty of water. Call a

physician immediately. If possible drink milk afterwards.

Most important symptoms and

effects

No information available.

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Revision Date 19-Jan-2018 Naphthalene-d8

Suitable Extinguishing Media Water mist may be used to cool closed containers. Carbon dioxide (CO₂), Dry chemical.

Unsuitable Extinguishing Media No information available

Flash Point 78 °C / 172.4 °F

Method -No information available

Autoignition Temperature 526.1 °C / 979 °F

Explosion Limits

5.9% Upper Lower 0.9%

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Dust can form an explosive mixture with air. Combustible material. Fine dust dispersed in air may ignite. Combustible material. Containers may explode when heated.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO2).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
2	1	1	N/A

6. Accidental release measures

Personal Precautions Environmental Precautions Remove all sources of ignition. Take precautionary measures against static discharges. See Section 12 for additional Ecological Information.

Methods for Containment and Clean Sweep up and shovel into suitable containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment. Up

7. Handling and storage

Handling

Do not get in eyes, on skin, or on clothing. Take precautionary measures against static discharges. Remove and wash contaminated clothing and gloves, including the inside, before re-use. Avoid breathing vapors or mists. Do not ingest. If swallowed then seek immediate medical assistance. Handle product only in closed system or provide appropriate exhaust ventilation. Wash thoroughly after handling. Use spark-proof tools and explosion-proof equipment. Use only non-sparking tools. Use only in well-ventilated areas.

Keep away from open flames, hot surfaces and sources of ignition.

Storage

Keep in a dry, cool and well-ventilated place. Refer product specification and/or product label for specific storage temperature requirement. Keep away from heat, sparks and flame. Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

This product does not contain any hazardous materials with occupational exposure limitsestablished by the region specific regulatory bodies.

Engineering Measures

Ensure adequate ventilation, especially in confined areas. Use explosion-proof

electrical/ventilating/lighting/equipment.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateSolidAppearanceWhiteOdorOdorless

Odor Threshold No information available

pH No information available

Melting Point/Range 81 - 83 °C / 177.8 - 181.4 °F

Boiling Point/RangeNo information availableFlash Point78 °C / 172.4 °F

Evaporation Rate Not applicable

Flammability (solid,gas)

No information available

Flammability or explosive limits

 Upper
 5.9%

 Lower
 0.9%

Vapor Pressure0.3 mmHg @ 25 °CVapor DensityNot applicable

Vapor DensityNot applicableSpecific GravityNo information available

Solubility

Partition coefficient; n-octanol/water

Autoignition Temperature

Decomposition Temperature

No information available

526.1 °C / 979 °F

No information available

ViscosityNot applicableMolecular FormulaC10 D8Molecular Weight136.22

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under recommended storage conditions. Hygroscopic.

Conditions to Avoid Keep away from open flames, hot surfaces and sources of ignition. Incompatible products.

Exposure to moist air or water.

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO₂)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information Component Information

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
(2H8)Naphthalene	1146-65-2	Not listed				

Mutagenic Effects No information available

Reproductive EffectsNo information available.Developmental EffectsNo information available.

STOT - single exposure None known STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects,both acute and No information available

delayed

Teratogenicity

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

No information available.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility No information available.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a

hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT Not regulated Not regulate

UN-No UN1334

Proper Shipping Name NAPHTHALENE, CRUDE

Hazard Class 4.1 Packing Group

IMDG/IMO

UN-No UN1334

Proper Shipping Name NAPHTHALENE, CRUDE

Hazard Class 4.7
Packing Group

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
(2H8)Naphthalene	1146-65-2	=	=	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed '-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

	Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Ī	(2H8)Naphthalene	1146-65-2	-	-	214-552-7	-	-	-	-	-

U.S. Federal Regulations

SARA 313 Not applicable

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA Not applicable

California Proposition 65 This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

Not applicable

U.S. Department of Transportation

Reportable Quantity (RQ):

DOT Marine Pollutant

N

DOT Severe Marine Pollutant

N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

Revision Date 19-Jan-2018 **Print Date** 19-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 02.11.2015 Page 1 of 6

Nickel Metal Shot,

SECTION 1: Identification of the substance/mixture and of the supplier

Product name: Nickel Metal Shot,

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: S25444A

Recommended uses of the product and restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific, Inc 9 Barnhart Drive, Hanover, PA 17331 (717) 632-1291

Supplier Details:

Fisher Science Education 6771 Silver Crest Road, Nazareth, PA 18064 (724)517-1954

Emergency telephone number:

Fisher Science Education

Emergency Telephone No.: 800-535-5053

SECTION 2: Hazards identification

Classification of the substance or mixture:



Residual powder can cause irritation to eyes and skin sensitization.

Signal word: Warning

Hazard statements:

Causes eye irritation.

Precautionary statements:

If medical advice is needed, have product container or label at hand.

Do not eat, drink or smoke when using this product.

If on skin: Wash with soap and water.

If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do.

Continue rinsing.

Store in a well ventilated place.


Dispose of contents and container as instructed in Section 13.

Other Non-GHS Classification:

WHMIS
None
NFPA/HMIS

Effective date: 02.11.2015 Page 2 of 6

Nickel Metal Shot,





HMIS RATINGS (0-4)

SECTION 3: Composition/information on ingredients

Ingredients:					
CAS 7440-02-0	Nickel Metal	100 %			
		Percentages are by weight			

SECTION 4: First aid measures

Description of first aid measures

After inhalation:

If inhaled, remove to fresh air.

After skin contact:

Wash affected areas with soap and water.

After eye contact:

Seek medical attention. Protect unexposed eye. Flush exposed eye gently using water for 15-20 minutes. Remove contact lenses while rinsing.

After swallowing:

Rinse mouth with water. Do not induce vomiting. Never give anything by mouth to an unconscious person.

Most important symptoms and effects, both acute and delayed: None Indication of any immediate medical attention and special treatment needed:

If seeking medical attention provide SDS document to physician. Physician should treat symptomatically.

SECTION 5: Firefighting measures

Extinguishing media

Suitable extinguishing agents:

Use water, dry chemical, chemical foam, carbon dioxide, or alcohol-resistant foam. Use water spray to cool unopened containers.

Unsuitable extinguishing agents:

No information available.

Special hazards arising from the substance or mixture: None **Advice for firefighters:**

Protective equipment:

Wear protective eyeware, gloves, and clothing. Refer to Section 8.

Additional information (precautions):

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 02.11.2015 Page 3 of 6

Nickel Metal Shot,

Avoid inhaling gases, fumes, dust, mist, vapor, and aerosols. Avoid contact with skin, eyes, and clothing. Avoid dust generation.

SECTION 6: Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Ensure adequate ventilation. Ensure that air-handling systems are operational.

Environmental precautions: None

Methods and material for containment and cleaning up: None

Reference to other sections: None

SECTION 7: Handling and storage

Precautions for safe handling:

Avoid contact with skin, eyes, and clothing. Do not eat, drink, smoke, or use personal products when handling chemical substances.

Conditions for safe storage, including any incompatibilities:

Provide ventilation for containers.

SECTION 8: Exposure controls/personal protection





Control Parameters: 7440-02-0, Nickel , TWA 1.5 mg/m3 USA. ACGIH.

7440-02-0, Nickel, TWA 1.000000 mg/m3 USA. OSHA. 7440-02-0, Nickel, TWA 0.015000 mg/m3 USA. NIOSH.

Appropriate Engineering controls: Emergency eye wash fountains and safety showers should be available in

the immediate vicinity of use or handling. Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor and mists below the applicable workplace exposure limits (Occupational

Exposure Limits-OELs) indicated above.

Respiratory protection: Not required under normal conditions of use.

Protection of skin: Select glove material impermeable and resistant to the substance. Select

glove material based on rates of diffusion and degradation. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Use proper glove removal technique without touching outer surface. Avoid skin contact with used gloves. Wear

protective clothing.

Eye protection: Wear equipment for eye protection tested and approved under

appropriate government standards such as NIOSH (US) or EN 166(EU).

General hygienic measures: Wash hands before breaks and immediately after handling the product.

Avoid contact with skin, eyes, and clothing.

SECTION 9: Physical and chemical properties

Appearance (physical state, color):			Not Determined Not Determined
Odor:	Odorless	Vapor pressure at 20°C:	1 mm Hg @ 1810°C
Odor threshold:	Not Determined	Vapor density:	Not Determined
pH-value:	9 - 11 at 20 °C	Relative density:	Not Determined

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 02.11.2015 Page 4 of 6

Nickel Metal Shot,

Melting/Freezing point:	1455°C	Solubilities:	Insoluble.
Boiling point/Boiling range:	1//301	Partition coefficient (noctanol/water):	Not Determined
Flash point (closed cup):	INIAT HATARMINAA	Auto/Self-ignition temperature:	87 °C
Evaporation rate:	INIAT DETERMINEA	Decomposition temperature:	Not Determined
Flammability (solid, gaseous):	Flammable	Wiccocity	a. Kinematic: Not Determined b. Dynamic: Not Determined
Density at 20°C:	Not Determined		

SECTION 10: Stability and reactivity

Reactivity:

Nonreactive under normal conditions.

Chemical stability:

Stable under normal conditions.

Possible hazardous reactions:

None under normal processing.

Conditions to avoid:

Incompatible materials. Dust generation. Excessive heat.

Incompatible materials:

Reactive with oxidizing agents, combustible materials, metals, acids.

Hazardous decomposition products:

Nickel oxides.

SECTION 11: Toxicological information

Acute Toxicity:

Oral:

7440-02-0 LD50 oral-rat: 105mg/kg **Chronic Toxicity**: No additional information. **Corrosion Irritation**: No additional information.

Sensitization:

Irritating to skin and gastrointestinal tract.

Numerical Measures: No additional information.

Carcinogenicity:

7440-02-0: IARC: 2B - Group 2B: Possibly carcinogenic to humans (Nickel) NTP: Reasonably anticipated to be a

human carcinogen (Nickel)

Mutagenicity: No additional information.

Reproductive Toxicity: No additional information.

SECTION 12: Ecological information

Ecotoxicity: No additional information.

Persistence and degradability: No additional information.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 02.11.2015 Page 5 of 6

Nickel Metal Shot,

Bioaccumulative potential: No additional information.

Mobility in soil: No additional information.

Other adverse effects: No additional information.

SECTION 13: Disposal considerations

Waste disposal recommendations:

Dispose of empty containers as unused product. It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11).

SECTION 14: Transport information

US DOT

UN Number:

ADR, ADN, DOT, IMDG, IATA

N/A

Limited Quantity Exception: None

Bulk: Non Bulk:

RQ (if applicable): None RQ (if applicable): None

Proper shipping Name: Not Classified. **Proper shipping Name:** Not Classified.

Hazard Class: None Hazard Class: None

Packing Group: Not Classified. **Packing Group:** Not Classified.

Marine Pollutant (if applicable): No Marine Pollutant (if applicable): No

additional information. additional information. **Comments:** None **Comments:** None

SECTION 15: Regulatory information

United States (USA)

SARA Section 311/312 (Specific toxic chemical listings):

Chronic

SARA Section 313 (Specific toxic chemical listings):

7440-02-0 Nickel.

RCRA (hazardous waste code):

None of the ingredients are listed.

TSCA (Toxic Substances Control Act):

All ingredients are listed.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

7440-02-0 Nickel 100 lbs.

Proposition 65 (California):

Chemicals known to cause cancer:

None of the ingredients are listed.

according to 29CFR1910/1200 and GHS Rev. 3

Effective date: 02.11.2015 Page 6 of 6

Nickel Metal Shot,

Chemicals known to cause reproductive toxicity for females:

None of the ingredients are listed.

Chemicals known to cause reproductive toxicity for males:

None of the ingredients are listed.

Chemicals known to cause developmental toxicity:

None of the ingredients are listed.

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

7440-02-0 Nickel.

Canadian NPRI Ingredient Disclosure list (limit 1%):

None of the ingredients are listed.

SECTION 16: Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations. Note. The responsibility to provide a safe workplace remains with the user. The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment. The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material. It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases: None

Abbreviations and Acronyms: None

Effective date: 02.11.2015 **Last updated**: 06.24.2015



SAFETY DATA SHEET

Creation Date 26-Sep-2009 Revision Date 24-Jan-2018 Revision Number 4

1. Identification

Product Name Propylbenzene

Cat No.: AC418430000; AC418430250; AC418431000; AC418435000

CAS-No 103-65-1

Synonyms 1-Phenyl Propane.

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids

Specific target organ toxicity (single exposure)

Category 3

Category 3

Target Organs - Respiratory system.

Aspiration Toxicity Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Flammable liquid and vapor May be fatal if swallowed and enters airways May cause respiratory irritation

Propylbenzene Revision Date 24-Jan-2018



Precautionary Statements

Prevention

Avoid breathing dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Wear protective gloves/protective clothing/eye protection/face protection

Keep cool

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Call a POISON CENTER or doctor/physician if you feel unwell

Skin

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Do NOT induce vomiting

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Toxic to aquatic life with long lasting effects

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Propyl benzene	103-65-1	>95

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Get medical attention.

Inhalation Remove to fresh air. If not breathing, give artificial respiration. Do not use mouth-to-mouth

method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Get

medical attention. Risk of serious damage to the lungs (by aspiration).

Ingestion Do NOT induce vomiting. Call a physician or poison control center immediately. If vomiting

occurs naturally, have victim lean forward.

Most important symptoms and

effects

Notes to Physician

Difficulty in breathing. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Water spray. Carbon dioxide (CO2). Dry chemical. Water mist may be used to cool closed

containers. Chemical foam. Water mist may be used to cool closed containers.

Unsuitable Extinguishing Media No information available

47 °C / 116.6 °F **Flash Point**

Method -No information available

450 °C / 842 °F **Autoignition Temperature**

Explosion Limits

6.00% Upper Lower .80%

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Vapors may travel to source of ignition and flash back. Containers may explode when heated. Vapors may form explosive mixtures with air.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO2).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
3	2	0	N/A

6. Accidental release measures

Ensure adequate ventilation. Use personal protective equipment as required. Remove all **Personal Precautions**

sources of ignition. Take precautionary measures against static discharges.

Environmental Precautions Do not flush into surface water or sanitary sewer system.

Up

Methods for Containment and Clean Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Ensure adequate ventilation. Wear personal protective equipment/face protection. Avoid Handling

contact with skin and eyes. Do not breathe mist/vapors/spray. Use spark-proof tools and explosion-proof equipment. Use only non-sparking tools. Wash hands before breaks and immediately after handling the product. Keep away from open flames, hot surfaces and

sources of ignition. Take precautionary measures against static discharges.

Keep away from heat, sparks and flame. Flammables area. Keep container tightly closed in Storage

a dry and well-ventilated place.

8. Exposure controls / personal protection

This product does not contain any hazardous materials with occupational exposure **Exposure Guidelines**

limitsestablished by the region specific regulatory bodies.

Ensure adequate ventilation, especially in confined areas. Use explosion-proof **Engineering Measures**

electrical/ventilating/lighting/equipment.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

FN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

No protective equipment is needed under normal use conditions. **Respiratory Protection**

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

9. Physical and chemical properties

Liquid **Physical State Appearance** Light yellow Odor aromatic

Odor Threshold No information available pН No information available **Melting Point/Range** -99 °C / -146.2 °F

158 °C / 316.4 °F @ 760 mmHg **Boiling Point/Range**

Flash Point 47 °C / 116.6 °F No information available **Evaporation Rate** Not applicable

Flammability (solid,gas)

Flammability or explosive limits

6.00% Upper Lower .80%

Vapor Pressure No information available

Vapor Density 4.1 **Specific Gravity** 0.860

Solubility Insoluble in water Partition coefficient; n-octanol/water No data available **Autoignition Temperature** 450 °C / 842 °F **Decomposition Temperature** No information available **Viscosity** No information available

Molecular Formula C9 H12

Molecular Weight 120.19

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability No information available.

Conditions to Avoid Keep away from open flames, hot surfaces and sources of ignition. Incompatible products.

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous polymerization does not occur. **Hazardous Polymerization**

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation		
Propyl benzene	LD50 = 6040 mg/kg (Rat)	Not listed	LC50 = 65000 ppm (Rat) 2 h		

Toxicologically Synergistic

No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation May cause irritation of respiratory tract

No information available Sensitization

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Propyl benzene	103-65-1	Not listed				

No information available **Mutagenic Effects**

Reproductive Effects No information available.

No information available. **Developmental Effects**

Teratogenicity No information available.

STOT - single exposure Respiratory system None known

STOT - repeated exposure

Aspiration hazard Category 1

Endocrine Disruptor Information

delayed

Other Adverse Effects The toxicological properties have not been fully investigated.

No information available

12. Ecological information

Symptoms / effects, both acute and Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

Ecotoxicity

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Persistence and Degradability Persistence is unlikely

Bioaccumulation/ Accumulation No information available.

Mobility Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Propyl benzene	3.68

Propyl benzene	3.68
13. Disposal c	onsiderations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN2364 **UN-No**

N-PROPYL BENZENE **Proper Shipping Name**

Hazard Class 3 **Packing Group** Ш

TDG

UN2364 **UN-No**

Proper Shipping Name N-PROPYL BENZENE

Hazard Class Packing Group Ш

IATA

UN2364 **UN-No**

n-PROPYLBENZENE **Proper Shipping Name**

Hazard Class Packing Group Ш

IMDG/IMO

UN-No UN2364

PROPYLBENZENE Proper Shipping Name

Hazard Class 3 **Packing Group** Ш

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Propyl benzene	103-65-1	Χ	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Propyl benzene	103-65-1	X	-	203-132-9	X	X	Х	Χ	KE-29781

U.S. Federal Regulations

Not applicable **SARA 313**

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

Propylbenzene Revision Date 24-Jan-2018

CERCLA Not applicable

California Proposition 65 This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

Component	Massachusetts	etts New Jersey Pennsylvania		Illinois	Rhode Island	
Propyl benzene	X	X	X	-	-	

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 26-Sep-2009

 Revision Date
 24-Jan-2018

 Print Date
 24-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

SECTION 1: IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

1.1 Product identifier

Identification of the substance 1,2,4-trimethylbenzene
Registration number (REACH) 01-2119472135-42-xxxx

EC number 202-436-9

Index No

CAS number 95-63-6

Additional relevant and available information Pseudocumene

1.2 Relevant identified uses of the substance or mixture and uses advised against

Relevant identified uses industrial use (SCC)

1.3 Details of the supplier of the safety data sheet

DHC Solvent Chemie GmbH Timmerhellstraße 28 D-45478 Mülheim an der Ruhr Germany

Telephone: +49 (208) 9940-0 Telefax: +49 (208) 9940-150

Competent person responsible for the safety data

sheet

e-mail (competent person) productsafety@dhc-solvent.de

1.4 Emergency telephone number

Emergency information service

Poison centre	
Country	Telephone
United Kingdom	+44 1235 239670

Vanessa Manz

SECTION 2: HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture Classification according to Regulation (EC) No 1272/2008 (CLP)

Hazard class	Category	Hazard class and cat- egory	Hazard state- ment
flammable liquid	Cat. 3	(Flam. Liq. 3)	H226
acute toxicity (inhal.)	Cat. 4	(Acute Tox. 4)	H332
skin corrosion/irritation	Cat. 2	(Skin Irrit. 2)	H315
serious eye damage/eye irritation	Cat. 2	(Eye Irrit. 2)	H319
specific target organ toxicity - single exposure (respiratory tract irritation)	Cat. 3	(STOT SE 3)	H335
aspiration hazard	Cat. 1	(Asp. Tox. 1)	H304
hazardous to the aquatic environment - chronic hazard	Cat. 2	(Aquatic Chronic 2)	H411



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

Remarks

For full text of H-phrases: see SECTION 16.

Substance with a community indicative occupational exposure limit value.

The most important adverse physicochemical, human health and environmental effects

May be fatal if swallowed and enters airways.

The product is combustible and can be ignited by potential ignition sources.

22 Label elements

Labelling according to Regulation (EC) No 1272/2008 (CLP)

Signal word **Danger**

Pictograms

GHS02, GHS07, **GHS08, GHS09**









Hazard statements

H226 Flammable liquid and vapour.

H304 May be fatal if swallowed and enters airways.

H315 Causes skin irritation.

H319 Causes serious eve irritation.

H332 Harmful if inhaled.

H335 May cause respiratory irritation.

Toxic to aquatic life with long lasting effects. H411

Precautionary statements

Precautionary statements - prevention

P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No

smoking.

P243 Take action to prevent static discharges. P273

Avoid release to the environment.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

Precautionary statements - response

P301+P310 IF SWALLOWED: Immediately call a POISON CENTER/doctor/physician.

P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if

present and easy to do. Continue rinsing.

P331 Do NOT induce vomiting.

P370+P378 In case of fire: Use sand, carbon dioxide or powder extinguisher to extinguish.

Precautionary statements - storage

P403+P233 Store in a well-ventilated place. Keep container tightly closed.

Store in a well-ventilated place. Keep cool. P403+P235

Precautionary statements - disposal

P501 Dispose of contents/container in accordance with local/regional/national/international

regulations.

2.3 Other hazards

According to the results of its assessment, this substance is not a PBT or a vPvB.

Vapour heavier than air, may form an explosive mixture in air: it may be ignited at some distance away from the spill resulting in flashbacks. Flowing product can create electrostatic charge, resulting sparks may ignite or cause an explosion.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Name of substance 1,2,4-trimethylbenzene Registration number (REACH) 01-2119472135-42-xxxx

EC number 202-436-9 CAS number 95-63-6

Index No

Molecular formula C9H12

SECTION 4: FIRST AID MEASURES

4.1 Description of first aid measures

General notes

Do not leave affected person unattended. Remove victim out of the danger area. Keep affected person warm, still and covered. Take off immediately all contaminated clothing. In all cases of doubt, or when symptoms persist, seek medical advice. In case of unconsciousness place person in the recovery position. Never give anything by mouth.

Following inhalation

If breathing is irregular or stopped, immediately seek medical assistance and start first aid actions. Provide fresh air.

Following skin contact

Wash with plenty of soap and water.

Following eye contact

Irrigate copiously with clean, fresh water, holding the eyelids apart. Remove contact lenses, if present and easy to do. Continue rinsing. In all cases of doubt, or when symptoms persist, seek medical advice.

Following ingestion

Do NOT induce vomiting. Rinse mouth with water (only if the person is conscious).

4.2 Most important symptoms and effects, both acute and delayed

Choking and suffocation risks. Deficits in perception and coordination, reaction time, or sleepiness.

4.3 Indication of any immediate medical attention and special treatment needed

none

SECTION 5: FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

carbon dioxide (CO2), BC-powder, foam, alcohol resistant foam, water mist

Unsuitable extinguishing media

water jet

5.2 Special hazards arising from the substance or mixture

Solvent vapours are heavier than air and may spread along floors. In case of insufficient ventilation and/or in use, may form flammable/explosive vapour-air mixture. May produce toxic fumes of carbon monoxide if burning.

Hazardous combustion products

carbon monoxide (CO), carbon dioxide (CO2)



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

5.3 Advice for firefighters

Wear breathing apparatus if exposed to vapours/dust/spray/gases. Co-ordinate firefighting measures to the fire surroundings. Do not allow firefighting water to enter drains or water courses. Collect contaminated firefighting water separately. Fight fire with normal precautions from a reasonable distance. Keep containers cool with water spray.

SECTION 6: ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures For non-emergency personnel

Remove persons to safety. Avoid inhaling sprayed product. Wearing of suitable protective equipment (including personal protective equipment referred to under Section 8 of the safety data sheet) to prevent any contamination of skin, eyes and personal clothing. Remove/take off immediately all contaminated clothing and wash it before reuse.

For emergency responders

Wear breathing apparatus if exposed to vapours/dust/spray/gases.

6.2 Environmental precautions

Keep away from drains, surface and ground water. Retain contaminated washing water and dispose of it. If substance has entered a water course or sewer, inform the responsible authority.

6.3 Methods and material for containment and cleaning up

Advices on how to contain a spill

Covering of drains.

Advices on how to clean up a spill

Wipe up with absorbent material (e.g. cloth, fleece). Collect spillage (sawdust., kieselgur (diatomite), sand, universal binder).

Appropriate containment techniques

Use of adsorbent materials. - covering of drains

Other information relating to spills and releases

Place in appropriate containers for disposal. Ventilate affected area.

6.4 Reference to other sections

Hazardous combustion products: see section 5. Personal protective equipment: see section 8. Incompatible materials: see section 10. Disposal considerations: see section 13.

SECTION 7: HANDLING AND STORAGE

7.1 Precautions for safe handling

Recommendations

• Measures to prevent fire as well as aerosol and dust generation

Use only in well-ventilated areas. Use local and general ventilation. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools.

Warning

Vapours are heavier than air, spread along floors and form explosive mixtures with air.

Advice on general occupational hygiene

Wash hands after use. Do not eat, drink and smoke in work areas. Remove contaminated clothing and protective equipment before entering eating areas. Never keep food or drink in the vicinity of chemicals. Never place chemicals in containers that are normally used for food or drink. Keep away from food, drink and animal feedingstuffs.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

Conditions for safe storage, including any incompatibilities

Managing of associated risks

Explosive atmospheres

Keep container tightly closed and in a well-ventilated place. Use local and general ventilation. Keep cool. Protect from sunlight.

• Flammability hazards

Keep away from sources of ignition - No smoking. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Take precautionary measures against static discharge. Protect from sunlight.

Incompatible substances or mixtures

Observe hints for combined storage.

Consideration of other advice

· Ventilation requirements

Keep any substance that emits harmful vapours or gases in a place that allows these to be permanently extracted. Use local and general ventilation. Ground/bond container and receiving equipment.

Packaging compatibilities

Only packagings which are approved (e.g. acc. to ADR) may be used.

Suitable materials and coatings for container/equipment: Carbon Steel, Stainless Steel, Polyester, Polytetrafluoroethylene (PTFE), Polyvinyl Alcohol (PVA)

Unsuitable Materials and Coatings for container/equipment: Butyl Rubber, Natural Rubber, Ethylene-propylene-diene monomer (EPDM), Polystyrene, Polyethylene, Polyacrylonetrile.

7.3 Specific end use(s)

See attached exposure scenarios

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 **Control parameters**

National limit values

Occupational exposure limit values (Workplace Exposure Limits)

Coun try	Name of agent	CAS No	Identifier	TWA [ppm]	TWA [mg/m³]	STEL [ppm]	STEL [mg/m³]	Source
DE	1,2,4-trimethylbenzene	95-63-6	AGW	20	100	40	200	TRGS 900
EU	1,2,4-trimethylbenzene	95-63-6	IOELV	20	100			2017/164/ EU
GB	aromatics	95-63-6	WEL		500			EH40/200 5
IE	1,2,4-trimethylbenzene	95-63-6	OELV	20	100			S.I. No. 619 of 2001

Notation

TWA

Short-term exposure limit: a limit value above which exposure should not occur and which is related to a 15-minute period **STEL**

unless otherwise specified.

Time-weighted average (long-term exposure limit): measured or calculated in relation to a reference period of 8 hours timeweighted average.

Relevant DNELs/DMELs/PNECs and other threshold levels



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

· human health values

Endpoint	Threshold level	Protection goal, route of exposure	Used in	Exposure time	
DNEL	100 mg/m ³	human, inhalatory	worker (industry)	acute - local effects	
DNEL	100 mg/m ³	human, inhalatory	worker (industry)	acute - systemic effects	
DNEL	100 mg/m ³	human, inhalatory	worker (industry)	chronic - local effects	
DNEL	16,171 mg/kg	human, dermal	worker (industry)	chronic - systemic effects	
DNEL	100 mg/m ³	human, inhalatory	worker (industry)	chronic - systemic effects	
DNEL	29.4 mg/m ³	human, inhalatory	consumer (private households)	acute - systemic effects	
DNEL	29.4 mg/m ³	human, inhalatory	consumer (private households)	chronic - local effects	
DNEL	15 mg/kg	human, oral	consumer (private households)	chronic - systemic effects	
DNEL	9,512 mg/kg	human, dermal	consumer (private households)	chronic - systemic effects	
DNEL	29.4 mg/m ³	human, inhalatory	consumer (private households)	chronic - systemic effects	

environmental values

End- point	Threshold level	Organism	Environmental compart- ment	Exposure time
PNEC	0.12 ^{mg} / _l	aquatic organisms	freshwater	short-term (single instance)
PNEC	0.12 ^{mg} / _l	aquatic organisms	marine water	short-term (single instance)
PNEC	2.41 ^{mg} / _l	microorganisms	sewage treatment plant (STP)	short-term (single instance)
PNEC	13.56 ^{mg} / _{kg}	benthic organisms	sediments	short-term (single instance)
PNEC	13.56 ^{mg} / _{kg}	pelagic organisms	sediments	short-term (single instance)
PNEC	2.34 ^{mg} / _{kg}	terrestrial organisms	soil	short-term (single instance)
PNEC	0.12 ^{mg} / _l	aquatic organisms	water	intermittent release

8.2 Exposure controls

Appropriate engineering controls

Technical measures and the appliance of appropriate working methods take priority over the use of personal protective equipment.

Safety and necessary control measures vary according to exposure conditions. Appropriate measures are:

Open windows, door, to allow sufficient ventilation. If this is not possible employ a fan to increase air exchange (see attached exposure scenarios).

Individual protection measures (personal protective equipment) Eye/face protection

Use safety goggle with side protection.

Skin protection

hand protection

Wear suitable gloves. Chemical protection gloves are suitable, which are tested according to EN 374.

Short-term contact with the skin: Disposable gloves

Long-term contact with the skin: Gloves with long cuffs

Check leak-tightness/impermeability prior to use.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

· type of material

NBR: acrylonitrile-butadiene rubber, FKM: fluoro-elastomer

material thickness

0.40 mm.

· breakthrough times of the glove material

>480 minutes (permeation: level 6)

· other protection measures

Take recovery periods for skin regeneration. Preventive skin protection (barrier creams/ointments) is recommended. Wash hands thoroughly after handling.

Body protection:

Suitable protective clothing: Flame resistant clothing

Suitable safety shoes: Anti static safety shoes according to EN 345 S3

Respiratory protection

For activities in enclosed areas at elevated temperatures of the substance, local extraction or explosion protected ventilation equipment is recommended. In case this is not sufficient for the intended use, then apply a suitable respiratory protection according to EN 140 type A or better (see exposure scenarios).

Environmental exposure controls

Do not empty into drains.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Appearance

Physical state liquid
Colour colourless
Odour characteristic

Other physical and chemical parameters

pH (value) not determined Melting point/freezing point -43.77 °C

Initial boiling point and boiling range 169.4 °C at 101.3 kPa Flash point 44 °C at 101.3 kPa

Explosive limits

lower explosion limit (LEL)
 upper explosion limit (UEL)
 6.4 vol%

Vapour pressure 0.3 kPa at 25 $^{\circ}$ C Density 0.88 9 /_{cm³} at 20 $^{\circ}$ C

Solubility(ies)

Water solubility 57 $^{\text{mg}}$ /_I at 25 °C

Partition coefficient

n-octanol/water (log KOW)

This information is not available.

Auto-ignition temperature 500 °C

Viscosity

• kinematic viscosity 0.843 mm²/s at 20 °C



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

Explosive properties

in use, may form flammable/explosive vapour-air mixture

Oxidising properties none

9.2 Other information

SECTION 10: STABILITY AND REACTIVITY

10.1 Reactivity

risk of ignition

if heated

risk of ignition

10.2 Chemical stability

The material is stable under normal ambient and anticipated storage and handling conditions of temperature and pressure (see below "Conditions to avoid").

10.3 Possibility of hazardous reactions

No known hazardous reactions.

10.4 Conditions to avoid

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Hints to prevent fire or explosion

Use only non-sparking tools.

10.5 Incompatible materials

oxidisers

10.6 Hazardous decomposition products

No known hazardous decomposition products.

SECTION 11: TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Classification according to GHS (1272/2008/EC, CLP)

Acute toxicity

Harmful if inhaled.

• Acute toxicity estimate (ATE)

inhalation: vapour 11 ^{mg}/_l/4h

Exposure route	Endpoint	Value	Species
oral	LD50	6,000 ^{mg} / _{kg}	rat

Skin corrosion/irritation

Causes skin irritation.

Serious eye damage/eye irritation

Causes serious eye irritation.

Respiratory or skin sensitisation

Shall not be classified as a respiratory or skin sensitiser.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

Summary of evaluation of the CMR properties

Shall not be classified as germ cell mutagenic, carcinogenic nor as a reproductive toxicant.

Specific target organ toxicity (STOT)

Specific target organ toxicity - single exposure

May cause respiratory irritation.

• Specific target organ toxicity - repeated exposure

Shall not be classified as a specific target organ toxicant (repeated exposure).

Aspiration hazard

May be fatal if swallowed and enters airways.

Information on likely routes of exposure

If on skin. If inhaled.

SECTION 12: ECOLOGICAL INFORMATION

12.1 Toxicity

Aquatic toxicity (acute)

Endpoint	Value	Species	Exposure time
LC50	7.72 ^{mg} / _l	fish	96 h
EC50	2.356 ^{mg} / _I	algae	96 h

Aquatic toxicity (chronic)

May cause long-term adverse effects in the aquatic environment.

12.2 Persistence and degradability

Data are not available.

12.3 Bioaccumulative potential

Data are not available.

BCF 243

12.4 Mobility in soil

Data are not available.

12.5 Results of PBT and vPvB assessment

According to the results of its assessment, this substance is not a PBT or a vPvB.

12.6 Other adverse effects

Data are not available.

SECTION 13: DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Waste treatment-relevant information

Solvent reclamation/regeneration.

Sewage disposal-relevant information

Do not empty into drains.

Waste treatment of containers/packagings

Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

List of wastes

Proposed waste code(s) for the used product:

07 01 04x Other organic solvents, washing liquids and mother liquors

Remarks

Please consider the relevant national or regional provisions. Waste shall be separated into the categories that can be handled separately by the local or national waste management facilities.

SECTION 14: TRANSPORT INFORMATION

14.1 UN number **1993**

14.2 UN proper shipping name FLAMMABLE LIQUID, N.O.S.

Technical name 1,2,4-trimethylbenzene

14.3 Transport hazard class(es)

Class 3 (flammable liquids)

14.4 Packing group III (substance presenting low danger)

14.5 Environmental hazards hazardous to the aquatic environment

14.6 Special precautions for user

Provisions for dangerous goods (ADR) should be complied within the premises.

14.7 Transport in bulk according to Annex II of MARPOL and the IBC Code

The cargo is not intended to be carried in bulk.

Information for each of the UN Model Regulations

• Transport of dangerous goods by road, rail and inland waterway (ADR/RID/ADN)

UN number 1993

Proper shipping name FLAMMABLE LIQUID, N.O.S.

Technical name (hazardous constituents) 1,2,4-trimethylbenzene

Class
Classification code
F1
Packing group
III

Danger label(s) 3 + "fish and tree"





Environmental hazards yes (hazardous to the aquatic environment)

Special provisions (SP) 274, 601

Excepted quantities (EQ) E1

Limited quantities (LQ) 5 L

Transport category (TC) 3

Tunnel restriction code (TRC) D/E

Hazard identification No 30

Emergency Action Code 3YE

• International Maritime Dangerous Goods Code (IMDG)

UN number 1993
Proper shipping name FLAMMABLE LIQUID, N.O.S.

Particulars in the shipper's declaration UN1993, FLAMMABLE LIQUID, N.O.S., (1,2,4-tri-

methylbenzene), 3, III, 44°C c.c., MARINE POLLUT-

ANT

Class 3



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)


Marine pollutant

Packing group

yes (hazardous to the aquatic environment)

Ш

3 + "fish and tree"



Special provisions (SP) 223, 274, 955

Excepted quantities (EQ) E1
Limited quantities (LQ) 5 L
EmS F-E, <u>S-E</u>
Stowage category A

• International Civil Aviation Organization (ICAO-IATA/DGR)

UN number 1993

Proper shipping name Flammable liquid, n.o.s.

Class 3

Environmental hazards yes (hazardous to the aquatic environment)

Packing group III
Danger label(s) 3



Special provisions (SP)

Excepted quantities (EQ)

Limited quantities (LQ)

A3

E1

10 L

SECTION 15: REGULATORY INFORMATION

- 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture Relevant provisions of the European Union (EU)
 - Restrictions according to REACH, Annex XVII

Name of substance	CAS No	Wt%	Type of registration	No
1,2,4-trimethylbenzene		100	1907/2006/EC annex XVII	3
1,2,4-trimethylbenzene		100	1907/2006/EC annex XVII	40

• List of substances subject to authorisation (REACH, Annex XIV)

not listed

• 2012/18/EU (Seveso III)

No	Dangerous substance/hazard categories	Qualifying quantity (to tion of lower and upp	nnes) for the applica- er-tier requirements	Notes
E2	environmental hazards (hazardous to the aquatic environment, cat. 2)	200	500	57)

Notation

57) Hazardous to the Aquatic Environment in category Chronic 2.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

• Limitation of emissions of volatile organic compounds due to the use of organic solvents in certain paints and varnishes and vehicle refinishing products (2004/42/EC, Deco-Paint Directive)

VOC content 100 %

• Directive on industrial emissions (VOCs, 2010/75/EU)

VOC content 100 %

• Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS) - Annex II

not listed

• Regulation 166/2006/EC concerning the establishment of a European Pollutant Release and Transfer Register (PRTR)

not listed

• Directive 2000/60/EC establishing a framework for Community action in the field of water policy (WFD)

not listed

National inventories

Country	Inventory	Status
AU	AICS	substance is listed
CA	DSL	substance is listed
CN	IECSC	substance is listed
EU	ECSI	substance is listed
EU	REACH Reg.	substance is listed
JP	CSCL-ENCS	substance is listed
KR	KECI	substance is listed
MX	INSQ	substance is listed
NZ	NZIoC	substance is listed
PH	PICCS	substance is listed
TR	CICR	substance is listed
TW	TCSI	substance is listed
US	TSCA	substance is listed

Legend

AICS Australian Inventory of Chemical Substances.
CICR Chemical Inventory and Control Regulation.

CSCL-ENCS List of Existing and New Chemical Substances (CSCL-ENCS).

DSL Domestic Substances List (DSL).

ECSI EC Substance Inventory (EINECS, ELINCS, NLP).

IECSC Inventory of Existing Chemical Substances Produced or Imported in China.

INSQ National Inventory of Chemical Substances.
KECI Korea Existing Chemicals Inventory.
NZIOC New Zealand Inventory of Chemicals.

PICCS Philippine Inventory of Chemicals and Chemical Substances.

REACH Reg. REACH registered substances.

TCSI

Taiwan Chemical Substance Inventory.

TSCA Toxic Substance Control Act.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

15.2 Chemical Safety Assessment

For this substance a chemical safety assessment has been carried out.

SECTION 16: OTHER INFORMATION

16.1 Indication of changes (revised safety data sheet)

Section	Former entry (text/value)	Actual entry (text/value)
1.3	Competent person responsible for the safety data sheet: Christian Knappe	Competent person responsible for the safety data sheet: Vanessa Manz
1.4		Poison centre: change in the listing (table)
2.2		Precautionary statements - prevention: change in the listing (table)
2.2		Precautionary statements - disposal: change in the listing (table)
6.2	Environmental precautions: Keep away from drains, surface and ground water. Retain contaminated washing water and dispose of it.	Environmental precautions: Keep away from drains, surface and ground water. Retain contaminated washing water and dispose of it. If substance has entered a water course or sewer, inform the responsible authority.
8.1		Occupational exposure limit values (Workplace Exposure Limits): change in the listing (table)
11.1		Information on likely routes of exposure: If on skin. If inhaled.
15.1		Restrictions according to REACH, Annex XVII: change in the listing (table)
15.1		National inventories: change in the listing (table)
16		Abbreviations and acronyms: change in the listing (table)
16	Key literature references and sources for data: - Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU - Regulation (EC) No. 1272/2008 (CLP, EU GHS) - See attached exposure scenarios http://www.dhc-solvent.de/dhc_sdbreach.html http://www.dhc-solvent.de/en/dhc_sdbreach.html Transport of dangerous goods by road, rail and inland waterway (ADR/RID/ADN). International Maritime Dangerous Goods Code (IMDG). International Air Transport Association (IATA).	Key literature references and sources for data: - Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU - Regulation (EC) No. 1272/2008 (CLP, EU GHS) - The exposure scenarios are available at www.dhc-solvent.de in the Service section. Transport of dangerous goods by road, rail and inland waterway (ADR/RID/ADN). International Maritime Dangerous Goods Code (IMDG). International Air Transport Association (IATA).
16		Disclaimer: This information is based upon the present state of our knowledge. This SDS has been compiled and is solely intended for this product. The information concerning legal regulations can lay no claim to completeness. In addition to this, other provisions may also apply to the product.

Abbreviations and acronyms

Abbr.	Descriptions of used abbreviations
2017/164/EU	Comission Directive establishing a fourth list of indicative occupational exposure limit values pursuant to Council Directive 98/24/EC, and amending Commission Directives 91/322/EEC, 2000/39/EC and 2009/161/EU
ADN	Accord européen relatif au transport international des marchandises dangereuses par voies de navigation intérieures (European Agreement concerning the International Carriage of Dangerous Goods by Inland Waterways)
ADR	Accord européen relatif au transport international des marchandises dangereuses par route (European Agreement concerning the International Carriage of Dangerous Goods by Road)
AGW	Workplace exposure limit



Safety Data Sheet according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

Abbr.	Descriptions of used abbreviations
BCF	Bioconcentration factor
CAS	Chemical Abstracts Service (service that maintains the most comprehensive list of chemical substances)
CLP	Regulation (EC) No 1272/2008 on classification, labelling and packaging of substances and mixtures
CMR	Carcinogenic, Mutagenic or toxic for Reproduction
DGR	Dangerous Goods Regulations (see IATA/DGR)
DMEL	Derived Minimal Effect Level
DNEL	Derived No-Effect Level
EH40/2005	EH40/2005 Workplace exposure limits (http://www.nationalarchives.gov.uk/doc/open-government-licence/)
EINECS	European Inventory of Existing Commercial Chemical Substances
ELINCS	European List of Notified Chemical Substances
EmS	Emergency Schedule
GHS	"Globally Harmonized System of Classification and Labelling of Chemicals" developed by the United Nations
IATA	International Air Transport Association
IATA/DGR	Dangerous Goods Regulations (DGR) for the air transport (IATA)
ICAO	International Civil Aviation Organization
IMDG	International Maritime Dangerous Goods Code
index No	The Index number is the identification code given to the substance in Part 3 of Annex VI to Regulation (EC) No 1272/2008
IOELV	Indicative occupational exposure limit value
MARPOL	International Convention for the Prevention of Pollution from Ships (abbr. of "Marine Pollutant")
NLP	No-Longer Polymer
PBT	Persistent, Bioaccumulative and Toxic
PNEC	Predicted No-Effect Concentration
ppm	Parts per million
REACH	Registration, Evaluation, Authorisation and Restriction of Chemicals
RID	Règlement concernant le transport International ferroviaire des marchandises Dangereuses (Regulations concerning the International carriage of Dangerous goods by Rail)
S.I. No. 619 of 2001	Safety, Health and Welfare at Work (Chemical Agents) Regulations 2001
STEL	Short-term exposure limit
TRGS 900	Arbeitsplatzgrenzwerte (TRGS 900)
TWA	Time-weighted average
VOC	Volatile Organic Compounds
vPvB	Very Persistent and very Bioaccumulative
WEL	Workplace exposure limit



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

Key literature references and sources for data

- Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU Regulation (EC) No. 1272/2008 (CLP, EU GHS)
 The exposure scenarios are available at www.dhc-solvent.de in the Service section.

Transport of dangerous goods by road, rail and inland waterway (ADR/RID/ADN). International Maritime Dangerous Goods Code (IMDG). International Air Transport Association (IATA).

List of relevant phrases (code and full text as stated in chapter 2 and 3)

Code	Text
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H335	May cause respiratory irritation.
H411	Toxic to aquatic life with long lasting effects.

Disclaimer

This information is based upon the present state of our knowledge. This SDS has been compiled and is solely intended for this product. The information concerning legal regulations can lay no claim to completeness. In addition to this, other provisions may also apply to the product.



SAFETY DATA SHEET

Revision Date 18-Jan-2018 Revision Number 3

1. Identification

Product Name Sodium Metal

Cat No. : S135-1LB; S206-1LB

Synonyms Natrium.

Recommended Use Laboratory chemicals.

Uses advised against

Not for food, drug, pesticide or biocidal product use

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Substances/mixtures which, in contact with water, emit Category 1

flammable gases

Skin Corrosion/irritation Category 1 B
Serious Eye Damage/Eye Irritation Category 1

Label Elements

Signal Word

Danger

Hazard Statements

In contact with water releases flammable gases which may ignite spontaneously Causes severe skin burns and eye damage



Precautionary Statements

Prevention

Do not breathe dust/fume/gas/mist/vapors/spray

Wash face, hands and any exposed skin thoroughly after handling

Wear protective gloves/protective clothing/eye protection/face protection

Keep away from any possible contact with water, because of violent reaction and possible flash fire

Handle under inert gas. Protect from moisture

Response

Immediately call a POISON CENTER or doctor/physician

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Wash contaminated clothing before reuse

Brush off loose particles from skin. Immerse in cool water/wrap with wet bandages

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing **Ingestion**

IF SWALLOWED: Rinse mouth. DO NOT induce vomiting

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a dry place. Store in a closed container

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Reacts violently with water

3. Composition/Information on Ingredients

Component	CAS-No	Weight %	
Sodium	7440-23-5	100	

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes.

Inhalation Move to fresh air.

Ingestion Do not induce vomiting.

Most important symptoms and

effects

Causes burns by all exposure routes. Product is a corrosive material. Use of gastric layage or emesis is contraindicated. Possible perforation of stomach or esophagus should

be investigated: Ingestion causes severe swelling, severe damage to the delicate tissue

and danger of perforation

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media No information available

Flash Point

Method - No information available

Autoignition Temperature

Explosion Limits

115 °C

Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

None known

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

HealthFlammabilityInstabilityPhysical hazards332W

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment.

Environmental Precautions See Section 12 for additional ecological information.

Methods for Containment and Clean No information available.

Up

7. Handling and storage

Handling Ensure adequate ventilation.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateSolidAppearanceLight greyOdorOdorless

Odor Threshold No information available

pН

Melting Point/Range 98 °C
Boiling Point/Range °C

Flash Point

Evaporation Rate No information available Flammability (solid,gas) No information available

Flammability or explosive limits

Upper
Lower
No data available
No information available
Vapor Density
No information available
Specific Gravity
O.9684 @ 20°C

Solubility Insoluble in water
Partition coefficient; n-octanol/water No data available

Autoignition Temperature 115 °C

Decomposition TemperatureNo information availableViscosityNo information available

Molecular Formula Na Molecular Weight 22.99

10. Stability and reactivity

Reactive Hazard Yes

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products.

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products None under normal use conditions

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Component Information

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

IrritationNo information availableSensitizationNo information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Sodium	7440-23-5	Not listed				

Mutagenic Effects No information available

Reproductive Effects

No information available.

Developmental Effects

No information available.

Teratogenicity

No information available.

Revision Date 18-Jan-2018 **Sodium Metal**

STOT - single exposure None known STOT - repeated exposure None known

Aspiration hazard No information available

delayed

Symptoms / effects,both acute and Product is a corrosive material. Use of gastric lavage or emesis is contraindicated. Possible perforation of stomach or esophagus should be investigated: Ingestion causes

severe swelling, severe damage to the delicate tissue and danger of perforation

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility No information available.

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN1428 **Proper Shipping Name SODIUM Hazard Class** 4.3 **Packing Group**

TDG

UN1428 **UN-No Proper Shipping Name** SODIUM **Hazard Class** 4.3 **Packing Group**

UN-No UN1428 **Proper Shipping Name** SODIUM **Hazard Class** 4.3 Packing Group

IMDG/IMO

UN1428 **UN-No SODIUM Proper Shipping Name Hazard Class** 4.3 **Packing Group**

15. Regulatory information

International Inventories

ı						EL 11100	- · · · -	D1000	=1100	4100	15000	1/501
	Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
	Sodium	Х	X	-	231-132-9	-		X	Х	Х	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

- F Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
- N Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
- P Indicates a commenced PMN substance
- R Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
- S Indicates a substance that is identified in a proposed or final Significant New Use Rule
- T Indicates a substance that is the subject of a Section 4 test rule under TSCA.
- XU Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).
- Y1 Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.
- Y2 Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Sodium	X	10 lb	-	-

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration

Not applicable

CERCLA Not applicable

Component	Hazardous Substances RQs	CERCLA EHS RQs		
Sodium	10 lb	-		

California Proposition 65

This product does not contain any Proposition 65 chemicals

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Sodium	X	Х	Х	-	Х

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Not applicable

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

Revision Date 18-Jan-2018

Print Date

18-Jan-2018

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Creation Date 05-Oct-2010 Revision Date 19-Jan-2018 Revision Number 3

1. Identification

Product Name Thallium(I) nitrate

Cat No.: AC194240000; AC194240100

CAS-No 10102-45-1 Synonyms Thallous Nitrate

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Oxidizing solids

Acute oral toxicity

Acute Inhalation Toxicity - Dusts and Mists

Specific target organ toxicity - (repeated exposure)

Category 2

Category 2

Target Organs - Kidney, Liver.

Label Elements

Signal Word

Danger

Hazard Statements

May intensify fire; oxidizer Fatal if inhaled

Fatal if swallowed

May cause damage to organs through prolonged or repeated exposure



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Do not breathe dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Wear respiratory protection

Keep/Store away from clothing/ other combustible materials

Take any precaution to avoid mixing with combustibles

Wear protective gloves/protective clothing/eye protection/face protection

Response

Get medical attention/advice if you feel unwell

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Immediately call a POISON CENTER or doctor/physician

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Rinse mouth

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposa

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Toxic to aquatic life with long lasting effects

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Thallium(I) nitrate	10102-45-1	>95

4. First-aid measures

General Advice Show this safety data sheet to the doctor in attendance. Immediate medical attention is

required.

Eye Contact In the case of contact with eyes, rinse immediately with plenty of water and seek medical

advice. Rinse immediately with plenty of water, also under the eyelids, for at least 15

minutes.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Immediate medical

attention is required.

Inhalation Remove to fresh air. If not breathing, give artificial respiration. Immediate medical attention

is required. Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or

other proper respiratory medical device.

Ingestion Do NOT induce vomiting. Call a physician or poison control center immediately.

Most important symptoms and

effects

None reasonably foreseeable.

Notes to Physician Treat symptomatically

5. Fire-fighting measures

surrounding environment.

Unsuitable Extinguishing Media No information available

Flash Point Method -No information available

No information available

Autoignition Temperature

Explosion Limits

No information available

Upper No data available Lower No data available

Oxidizing Properties Oxidizer

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Oxidizer: Contact with combustible/organic material may cause fire. May ignite combustibles (wood paper, oil, clothing, etc.).

Hazardous Combustion Products

Nitrogen oxides (NOx).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

NFPA

Health	Flammability	Instability	Physical hazards
4	1	2	OX

6. Accidental release measures

Personal Precautions Use personal protective equipment as required. Ensure adequate ventilation. Avoid dust

formation. Keep people away from and upwind of spill/leak. Evacuate personnel to safe

areas

Environmental Precautions Should not be released into the environment.

Methods for Containment and Clean Sweep up and shovel into suitable containers for disposal. Avoid dust formation. **Up**

	7. Handling and storage
Handling	Wear personal protective equipment/face protection. Avoid dust formation. Do not get in eyes, on skin, or on clothing. Do not breathe (dust, vapor, mist, gas). Do not ingest. If swallowed then seek immediate medical assistance. Use only under a chemical fume hood.
Storage	Keep containers tightly closed in a dry, cool and well-ventilated place. Do not store near combustible materials. Store under an inert atmosphere. Protect from moisture. Keep

container tightly closed in a dry and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

	Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
ſ	Thallium(I) nitrate	TWA: 0.02 mg/m ³	Skin	IDLH: 15 mg/m ³	TWA: 0.1 mg/m ³
L	**	Skin		TWA: 0.1 mg/m ³	_

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: NIOSH - National Institute for Occupational Safety and Health

Engineering Measures Use only under a chemical fume hood. Ensure that eyewash stations and safety showers

are close to the workstation location. Ensure adequate ventilation, especially in confined

areas.

Personal Protective Equipment

Eye/face ProtectionWear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateSolidAppearanceWhiteOdorOdorless

Odor Threshold

PH

No information available

No information available

Melting Point/Range 206 °C / 402.8 °F

Boiling Point/Range 433 °C / 811.4 °F @ 760 mmHg

Flash Point No information available

Evaporation Rate Not applicable

Flammability (solid,gas)

No information available

Flammability or explosive limits

UpperNo data availableLowerNo data availableVapor PressureNo information available

Vapor Density Not applicable

Specific GravityNo information availableSolubilityNo information availablePartition coefficient; n-octanol/waterNo data available

Autoignition Temperature No information available

Decomposition Temperature 450 °C

ViscosityNot applicableMolecular FormulaN O3 TIMolecular Weight266.38

10. Stability and reactivity

Reactive Hazard Yes

Stability Oxidizer: Contact with combustible/organic material may cause fire. Hygroscopic.

Conditions to Avoid Incompatible products. Excess heat. Combustible material. Avoid dust formation. Exposure

to moist air or water.

Incompatible Materials Strong oxidizing agents, Reducing Agent, Strong acids, Strong reducing agents,

Combustible material

Hazardous Decomposition Products Nitrogen oxides (NOx)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information Component Information

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

	Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Γ	Thallium(I) nitrate	10102-45-1	Not listed				

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known STOT - repeated exposure Kidney Liver

Aspiration hazard No information available

Symptoms / effects,both acute and No information available

delayed

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

••

Persistence and DegradabilitySoluble in water Persistence is unlikely based on information available.

Bioaccumulation/ AccumulationNo information available.

Mobility Will likely be mobile in the environment due to its water solubility.

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Thallium(I) nitrate - 10102-45-1	U217	-

14. Transport information

DOT

UN-No UN2727

Proper Shipping Name THALLIUM NITRATE

Hazard Class 6.1 Subsidiary Hazard Class 5.1 Packing Group II

TDG

UN-No UN2727

Proper Shipping Name THALLIUM NITRATE

Hazard Class 6.1 Subsidiary Hazard Class 5.1 Packing Group II

<u>IATA</u>

UN-No UN2727

Proper Shipping Name THALLIUM NITRATE

Hazard Class 6.1 Subsidiary Hazard Class 5.1 Packing Group II

IMDG/IMO

UN-No UN2727

Proper Shipping Name THALLIUM NITRATE

Hazard Class 6.1 Subsidiary Hazard Class 5.1 Packing Group II

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Thallium(I) nitrate	10102-45-1	X	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed '-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

_										
L	Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Γ	Thallium(I) nitrate	10102-45-1	-	Х	233-273-1	X	X	Х	Х	X

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Thallium(I) nitrate	10102-45-1	>95	1.0

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	Component CWA - Hazardous Substances		CWA - Toxic Pollutants	CWA - Priority Pollutants	
Thallium(I) nitrate	-	-	X	-	

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA This material, as supplied, contains one or more substances regulated as a hazardous

substance under the Comprehensive Environmental Response Compensation and Liability

Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Thallium(I) nitrate	100 lb	-

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Thallium(I) nitrate	X	X	X	X	-

U.S. Department of Transportation

Reportable Quantity (RQ):

DOT Marine Pollutant

NOT Severe Marine Pollutant

N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 05-Oct-2010

 Revision Date
 19-Jan-2018

 Print Date
 19-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

Material Safety Data Sheet Toluene

ACC# 23590

Section 1 - Chemical Product and Company Identification

MSDS Name: Toluene

Catalog Numbers: AC167900000, AC167900025, AC176850000, AC176850025, AC176850050, AC176850051, AC176850250, AC176855000, AC177160000, AC177160025, AC177160050, AC177160100, AC177160250, AC268370000, AC268370010, AC326980000, AC326980010, AC326981000, AC326982500, AC332070000, AC332070010, AC332070025, AC364410000, AC364410010, AC364410025, AC364411000, AC364415000, AC379140010, AC379140025, AC386760000, AC386760050, AC421160000, AC421160010, AC421160040, AC421170000, AC424550000, AC424550250, AC610590190, AC610590500, AC610591150, AC610592000, AC610790190, AC610790500, AC610791150, AC610792000, 16790-0010, 17685-0010, 17716-0010, 26837-0025, 42117-0040, 42117-5000, 42455-0010, 42455-5000, 61011-0040, 61046-0010, 61046-1000, 61095-1000, BP2625100, S80229HPLC, T288-1, T288RS-19, T290-1, T290-1LC, T290-4, T290N-219, T290RS-19, T290RS-200, T290RS-28, T290SK-1, T290SK-4, T290SS-115, T290SS-200, T290SS-28, T290SS-50, T291-4, T291-4LC, T291RS-200, T291SK-4, T291SK4, T291SS19, T313-4, T313SK-4, T323-20, T323-4, T324-1, T324-20, T324-200, T324-200LC, T324-20LC, T324-4, T324-500, T324CU1300, T324FB-115, T324FB-19, T324FB-200, T324FB-50, T324J-500, T324POP-200, T324POPB-200, T324RB-115, T324RB-19, T324RB-200, T324RS-115, T324RS-19, T324RS-200, T324RS-28, T324RS-50, T324S-4, T324SK-4, T324SS-115, T324SS-200, T324SS-28, T324SS-50, T326F-1GAL, T326P-4, T326S-20, T326S20LC, T330-4 **Synonyms:** Methylbenzene; Methylbenzol; Phenylmethane; Toluol.

Company Identification:

Fisher Scientific 1 Reagent Lane Fair Lawn, NJ 07410

For information, call: 201-796-7100 Emergency Number: 201-796-7100

For CHEMTREC assistance, call: 800-424-9300

For International CHEMTREC assistance, call: 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
108-88-3	Toluene	>99	203-625-9

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: colorless liquid. Flash Point: 4 deg C.

Warning! Flammable liquid and vapor. Causes eye, skin, and respiratory tract irritation. Breathing vapors may cause drowsiness and dizziness. May be absorbed through intact skin. Aspiration hazard if swallowed. Can enter lungs and cause damage. Possible risk of harm to the unborn child. May cause central nervous system depression. May cause liver and kidney damage.

Target Organs: Kidneys, central nervous system, liver, respiratory system, eyes, skin.

Potential Health Effects

Eye: Causes eye irritation. Vapors may cause eye irritation.

Skin: Causes skin irritation. May be absorbed through the skin. Repeated or prolonged exposure may cause

drying and cracking of the skin. Not expected to cause an allergic skin reaction.

Ingestion: May cause effects similar to those for inhalation exposure. Aspiration of material into the lungs may cause chemical pneumonitis, which may be fatal. May cause central nervous system depression.

Inhalation: Causes respiratory tract irritation. Inhalation of high concentrations (>200 ppm) of toluene are clearly associated with CNS encephalopathy, headache, depression, lassitude (weakness, exhaustion), impaired coordination, transient memory loss, and impaired reaction time.

Chronic: Prolonged or repeated skin contact may cause defatting and dermatitis. Repeated exposure in combination with constant, loud noise can produce hearing loss and dizziness. Chronic hydrocarbon abuse (for example, sniffing glue or light hydrocarbons such as contained in this material) has been associated with irregular heart rhythms and potential cardiac arrest. Toluene abuse has been linked with kidney disease, as evidenced by blood, protein, & pus in the urine, accompanied by elevated serum creatinine, decreased urinary output, & metabolic & renal tubular acidosis. Although kidney toxicity has not been common in cases of occupational toluene exposure, there has been at least one report of renal toxicity following a 40-year occupational toluene exposure. Toluene does not cause the severe injury to the bone marrow that is characteristic of benzene poisoning. Intentional abuse of toluene vapors has been linked to damage of the brain, liver, kidney and to death. Repeated inhalation exposure of toluene to animals causes histological changes in the brain, degeneration of the heart tissue, and possible immune

Section 4 - First Aid Measures

Eyes: In case of contact, immediately flush eyes with plenty of water for a t least 15 minutes. Get medical aid.

Skin: In case of contact, flush skin with plenty of water. Remove contaminated clothing and shoes. Get medical aid if irritation develops and persists. Wash clothing before reuse.

Ingestion: Potential for aspiration if swallowed. Get medical aid immediately. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If vomiting occurs naturally, have victim lean forward.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: Causes cardiac sensitization to endogenous catelcholamines which may lead to cardiac arrhythmias. Do NOT use adrenergic agents such as epinephrine or pseudoepinephrine.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Water runoff can cause environmental damage. Dike and collect water used to fight fire. Use water spray to keep fire-exposed containers cool. Water may be ineffective. Material is lighter than water and a fire may be spread by the use of water. Flammable liquid and vapor. Vapors are heavier than air and may travel to a source of ignition and flash back. Vapors can spread along the ground and collect in low or confined areas. This liquid floats on water and may travel to a source of ignition and spread fire. May accumulate static electricity.

Extinguishing Media: Use water spray, dry chemical, carbon dioxide, or appropriate foam. Solid streams of water may be ineffective and spread material.

Flash Point: 4 deg C (39.20 deg F)

Autoignition Temperature: 480 deg C (896.00 deg F)

Explosion Limits, Lower:1.1 vol%

Upper: 7.1 vol%

NFPA Rating: (estimated) Health: 2; Flammability: 3; Instability: 0

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8. **Spills/Leaks:** Absorb spill with inert material (e.g. vermiculite, sand or earth), then place in suitable container. Remove all sources of ignition. Provide ventilation. Use only non-sparking tools and equipment.

Control runoff and isolate discharged material for proper disposal. Use water spray to cool and disperse vapors and protect personnel.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Ground and bond containers when transferring material. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Keep container tightly closed. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames. Use only with adequate ventilation. Keep away from heat, sparks and flame. Avoid breathing vapor or mist.

Storage: Keep away from sources of ignition. Store in a tightly closed container. Store in a cool, dry, well-ventilated area away from incompatible substances. Separate from oxidizing materials.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate general or local exhaust ventilation to keep airborne concentrations below the permissible exposure limits. Ventilation fans and other electrical service must be non-sparking and have an explosion-proof design.

Exposure Limits

Chemical Name	Chemical Name ACGIH		OSHA - Final PELs	
Toluene	20 ppm TWA	100 ppm TWA; 375 mg/m3 TWA 500 ppm IDLH	200 ppm TWA; 300 ppm Ceiling	

OSHA Vacated PELs: Toluene: 100 ppm TWA; 375 mg/m3 TWA

Personal Protective Equipment Eyes: Wear chemical splash goggles.

Skin: Wear appropriate gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Section 9 - Physical and Chemical Properties

Physical State: Liquid Appearance: colorless

Odor: sweetish odor - pleasant odor - benzene-like

pH: Not applicable.

Vapor Pressure: 28.4 mm Hg @ 25 deg C

Vapor Density: 3.1 (Air=1)

Evaporation Rate:2.4 (Butyl acetate=1)

Viscosity: 0.59 cps @ 20 deg C Boiling Point: 110.6 deg C Freezing/Melting Point:-95 deg C

Decomposition Temperature: Not available.

Solubility: Insoluble.

Specific Gravity/Density:0.86 (Water=1)

Molecular Formula:C6H5CH3 Molecular Weight:92.14

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures. **Conditions to Avoid:** Ignition sources, excess heat, confined spaces.

Incompatibilities with Other Materials: Strong oxidizing agents, nitric acid, sulfuric acid.

Hazardous Decomposition Products: Carbon monoxide, carbon dioxide.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#:

CAS# 108-88-3: XS5250000

LD50/LC50:

CAS# 108-88-3:

Draize test, rabbit, eye: 870 ug Mild; Draize test, rabbit, eye: 2 mg/24H Severe; Draize test, rabbit, skin: 435 mg Mild; Draize test, rabbit, skin: 500 mg Moderate; Draize test, rabbit, skin: 20 mg/24H Moderate; Inhalation, mouse: LC50 = 400 ppm/24H; Inhalation, mouse: LC50 = 30000 mg/m3/2H; Inhalation, mouse: LC50 = 19900 mg/m3/7H; Inhalation, mouse: LC50 = 10000 mg/m3; Inhalation, rat: LC50 = 49 gm/m3/4H; Oral, rat: LD50 = 636 mg/kg;

Skin, rabbit: LD50 = 14100

Carcinogenicity:

CAS# 108-88-3: Not listed by ACGIH, IARC, NTP, or CA Prop 65.

Epidemiology: No information available.

Teratogenicity: In an epidemiologic study of toluene and pregnancy, occupational exposures to toluene were said to be associated with an increased incidence of renal, urinary, gastrointestinal, and cardiac anomalies. Fetotoxicity (reduced fetal weight), behavioural effects (effects on learning and memory) and hearing loss (in males) were observed in the offspring of rats exposed by inhalation to toluene, in the absence of maternal toxicity.

Reproductive Effects: Many reports of reproductive effects of toluene abuse or heavy occupational exposure are confounded by mixed solvent exposure or fetal alcohol syndrome. Women exposed to toluene in lab work had a 4.7-fold increased risk of spontaneous abortions.

Mutagenicity: No information available. Neurotoxicity: No information available.

Other Studies:

Section 12 - Ecological Information

Ecotoxicity: No data available. Bluegill LC50=17 mg/L/24H Shrimp LC50=4.3 ppm/96HFathead minnow LC50=36.2 mg/L/96HSunfish (fresh water) TLm=1180 mg/L/96H

Environmental: From soil, substance evaporates and is microbially biodegraded. In water, substance volatilizes and biodegrades.

Physical: Photochemically produced hydroxyl radicals degrade substance.

Other: No information available.

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed.

RCRA U-Series:

CAS# 108-88-3: waste number U220.

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	TOLUENE	TOLUENE
Hazard Class:	3	3
UN Number:	UN1294	UN1294
Packing Group:	II	II
Additional Info:		FLASHPOINT 4 C

Section 15 - Regulatory Information

US FEDERAL

TSCA

CAS# 108-88-3 is listed on the TSCA inventory.

Health & Safety Reporting List

CAS# 108-88-3: Effective 10/4/82, Sunset 10/4/92

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

CAS# 108-88-3: 1000 lb final RQ; 454 kg final RQ

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPQ.

SARA Codes

CAS # 108-88-3: immediate, fire.

Section 313

This material contains Toluene (CAS# 108-88-3, >99%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

Clean Air Act:

CAS# 108-88-3 is listed as a hazardous air pollutant (HAP).

This material does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors.

Clean Water Act:

CAS# 108-88-3 is listed as a Hazardous Substance under the CWA. CAS# 108-88-3 is listed as a Priority Pollutant under the Clean Water
Act. CAS# 108-88-3 is listed as a Toxic Pollutant under the Clean Water
Act.

OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

CAS# 108-88-3 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

California Prop 65

WARNING: This product contains Toluene, a chemical known to the state of California to cause developmental reproductive toxicity.

California No Significant Risk Level: None of the chemicals in this product are listed.

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols:

XN F

Risk Phrases:

R 11 Highly flammable.

R 38 Irritating to skin.

R 48/20 Harmful: danger of serious damage to health by prolonged exposure through inhalation.

R 63 Possible risk of harm to the unborn child.

R 65 Harmful: may cause lung damage if swallowed.

R 67 Vapours may cause drowsiness and dizziness.

Safety Phrases:

S 36/37 Wear suitable protective clothing and gloves.

S 46 If swallowed, seek medical advice immediately and show this con tainer or label.

S 62 If swallowed, do not induce vomiting: seek medical advice immed iately and show this container or label.

WGK (Water Danger/Protection)

CAS# 108-88-3: 2

Canada - DSL/NDSL

CAS# 108-88-3 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of B2, D2A, D2B.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

CAS# 108-88-3 is listed on the Canadian Ingredient Disclosure List.

Section 16 - Additional Information

MSDS Creation Date: 6/01/1999 **Revision #10 Date:** 2/13/2008

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.



SAFETY DATA SHEET

Creation Date 15-Jun-2010 Revision Date 31-Jul-2019 **Revision Number** 7

1. Identification

Product Name o-Xylene

Cat No.: O5081-4; O5081-4LC; O5081-500; O5081FB-200; DO5081-500

CAS-No 95-47-6

1,2-Dimethylbenzene (Certified) **Synonyms**

Recommended Use Laboratory chemicals.

Food, drug, pesticide or biocidal product use Uses advised against

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA:

800-424-9300

CHEMTREC®, Outside the USA:

001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids Category 3 Category 4 Acute dermal toxicity Acute Inhalation Toxicity - Vapors Category 4 Skin Corrosion/irritation Category 2 Serious Eye Damage/Eye Irritation Category 2 Specific target organ toxicity (single exposure) Category 3 Target Organs - Respiratory system, Central nervous system (CNS).

Specific target organ toxicity - (repeated exposure) Category 2

Target Organs - Liver.

Aspiration Toxicity Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Flammable liquid and vapor May be fatal if swallowed and enters airways Harmful in contact with skin Causes skin irritation Causes serious eye irritation

Harmful if inhaled

May cause respiratory irritation May cause drowsiness or dizziness

May cause damage to organs through prolonged or repeated exposure



Precautionary Statements

Prevention

Wear protective gloves/protective clothing/eye protection/face protection

Use only outdoors or in a well-ventilated area

Wash face, hands and any exposed skin thoroughly after handling

Do not breathe dust/fume/gas/mist/vapors/spray

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Keep cool

Response

Get medical attention/advice if you feel unwell

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Call a POISON CENTER or doctor/physician if you feel unwell

Skin

Call a POISON CENTER or doctor/physician if you feel unwell

If skin irritation occurs: Get medical advice/attention

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Wash contaminated clothing before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Do NOT induce vomiting

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Harmful to aquatic life with long lasting effects

Revision Date 31-Jul-2019 o-Xylene

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
o-Xylene	95-47-6	>95

4. First-aid measures

If symptoms persist, call a physician. **General Advice**

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get **Eye Contact**

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists,

call a physician.

Inhalation Move to fresh air. If not breathing, give artificial respiration. Get medical attention if

symptoms occur. Risk of serious damage to the lungs.

Ingestion Clean mouth with water and drink afterwards plenty of water. Do not induce vomiting, Call a

physician or Poison Control Center immediately. If vomiting occurs naturally, have victim

lean forward.

Most important symptoms and

effects

Breathing difficulties. Symptoms of overexposure may be headache, dizziness, tiredness,

nausea and vomiting Treat symptomatically

Notes to Physician

Fire-fighting measures

Suitable Extinguishing Media Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide. Cool closed

containers exposed to fire with water spray.

Unsuitable Extinguishing Media Do not use a solid water stream as it may scatter and spread fire

31 °C / 87.8 °F **Flash Point**

Method -No information available

Autoignition Temperature 465 °C / 869 °F

Explosion Limits

6.7 vol % Upper Lower 0.9 vol %

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Containers may explode when heated. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO2)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Physical hazards Health **Flammability** Instability N/A 3 0

Revision Date 31-Jul-2019 o-Xylene

Accidental release measures

Personal Precautions

Use personal protective equipment. Ensure adequate ventilation. Remove all sources of

ignition. Take precautionary measures against static discharges.

Environmental Precautions

Should not be released into the environment. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage. Do not flush into surface

water or sanitary sewer system.

Up

Methods for Containment and Clean Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Avoid Handling

> ingestion and inhalation. Ensure adequate ventilation. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. Take precautionary

measures against static discharges.

Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat Storage

and sources of ignition. Flammables area.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
o-Xylene	TWA: 100 ppm		IDLH: 900 ppm	TWA: 100 ppm
	STEL: 150 ppm		TWA: 100 ppm	STEL: 150 ppm
			TWA: 435 mg/m ³	
			STEL: 150 ppm	
			STEL: 655 mg/m ³	

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures Ensure that eyewash stations and safety showers are close to the workstation location.

Ensure adequate ventilation, especially in confined areas. Use explosion-proof

electrical/ventilating/lighting/equipment.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Long sleeved clothing.

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard **Respiratory Protection**

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

Physical and chemical properties

Physical State Liquid Colorless **Appearance** aromatic Odor

No information available **Odor Threshold**

pH Not applicable
Melting Point/Range -25 °C / -13 °F

Boiling Point/Range 143 - 145 °C / 289.4 - 293 °F

Flash Point 31 °C / 87.8 °F

Evaporation Rate 0.7

Flammability (solid,gas) Not applicable

Flammability or explosive limits

 Upper
 6.7 vol %

 Lower
 0.9 vol %

 Vapor Pressure
 882 Pa @ 25 °C

Vapor Density 3.7 Specific Gravity 0.884

Solubility
Partition coefficient; n-octanol/water
Autoignition Temperature
Pecomposition Temperature
Viscosity

No information available
A65 °C / 869 °F
No information available
No information available

Molecular Formula C8 H10 Molecular Weight 106.17

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products. Excess heat. Keep away from open flames, hot surfaces and

sources of ignition.

Incompatible Materials Strong oxidizing agents, Strong acids

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO₂)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
o-Xylene	LD50 = 3608 mg/kg (Rat)	14100 mg/kg (Rabbit)	LC50 = 4330 ppm (Rat) 6 h

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

 Irritation
 Irritating to eyes and skin

 Sensitization
 No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
o-Xylene	95-47-6	Not listed				

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental EffectsNo information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system Central nervous system (CNS)

STOT - repeated exposure Live

Aspiration hazard Category 1

Symptoms / effects, both acute and Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

delayed

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Do not empty into drains. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
o-Xylene	EC50: = 4.2 mg/L, 192h	LC50: 16.1 mg/L/96h	EC50 = 0.0084 mg/L 24 h	EC50: 2.61 - 5.59 mg/L, 48h
-	(Pseudokirchneriella	(Lepomis macrochirus)	_	Flow through (Daphnia
	subcapitata)	LC50: 13 mg/L/24h		magna)
	EC50: = 4.7 mg/L, 72h static	(Carassius auratus)		EC50: 0.78 - 2.51 mg/L, 48h
	(Pseudokirchneriella			Static (Daphnia magna)
	subcapitata)			EC50: = 3.2 mg/L, 48h
				(Daphnia magna)

Persistence and Degradability Insoluble in water Persistence is unlikely based on information available.

Bioaccumulation/ Accumulation No information available.

Mobility Will likely be mobile in the environment due to its volatility.

Component	log Pow
o-Xylene	3.12

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN1307
Proper Shipping Name XYLENES
Hazard Class 3

Hazard Class 3 Packing Group III

TDG

UN-No UN1307
Proper Shipping Name XYLENES
Hazard Class 3
Packing Group III

<u>IATA</u>

UN-No UN1307
Proper Shipping Name Xylenes
Hazard Class 3

Packing Group

IMDG/IMO

UN-No UN1307
Proper Shipping Name Xylenes
Hazard Class 3
Packing Group III

Ш

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
o-Xylene	95-47-6	Χ	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

	Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Ī	o-Xylene	95-47-6	X	-	202-422-2	X	X	Х	X	KE-35429

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
o-Xylene	95-47-6	>95	1.0

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

0117	Tolcali Water Acty				
	Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
	o-Xylene	X	-	-	-

Clean Air Act

Component	HAPS D	Data Class 1 Ozone Depletors	Class 2 Ozone Depletors
o-Xylene	X		-

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
o-Xylene	1000 lb	-

California Proposition 65

This product does not contain any Proposition 65 chemicals

U.S. State Right-to-Know

Regulations

Component Massachusetts New Jersey Pennsylvania Illinois Rhode Island

o-Xylene	Χ	X	X	Χ	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 15-Jun-2010

 Revision Date
 31-Jul-2019

 Print Date
 31-Jul-2019

Revision Summary SDS sections updated. 11. 16.

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Version 8.1 Revision Date 10/21/2020 Print Date 09/14/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : 4,4'-DDD

Product Number : 49009
Brand : Supelco
CAS-No. : 72-54-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301 Acute toxicity, Dermal (Category 4), H312

Carcinogenicity (Category 2), H351

Short-term (acute) aquatic hazard (Category 1), H400 Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Supelco - 49009 Page 1 of 9



Hazard statement(s) H301 H312 H351 H410	Toxic if swallowed. Harmful in contact with skin. Suspected of causing cancer. Very toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing.
P281	Use personal protective equipment as required.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of soap and water. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : 1,1-Dichloro-2,2-bis(4-chlorophenyl)ethane

Formula : $C_{14}H_{10}Cl_4$ Molecular weight : 320.04 g/mol CAS-No. : 72-54-8 EC-No. : 200-783-0

Component	Classification	Concentration		
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane				
	Acute Tox. 3; Acute Tox. 4; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H301, H312, H351, H400, H410 M-Factor - Aquatic Acute: 100	<= 100 %		

For the full text of the H-Statements mentioned in this Section, see Section 16.

Millipore

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Consult a physician. Show this material safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Supelco - 49009 Page 3 of 9

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed. For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Supelco - 49009 Page 4 of 9

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a fullface particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

SECTION 9: Physical and chemical properties

Information on basic physical and chemical properties

a`) Appearance	Form: solid
a	, Appearance	i oriii. Sonu

b)	Odor	No data available
c)	Odor Threshold	No data available
d)	рН	No data available

e) Melting 94.0 - 96.0 °C (201.2 - 204.8 °F) point/freezing point

Initial boiling point and boiling range

193.0 °C 379.4 °F at 1.3 hPa

g) Flash point ()No data available h) Evaporation rate No data available Flammability (solid, No data available

gas)

No data available

Upper/lower j) flammability or explosive limits

< 0.000 hPa at 25.0 °C (77.0 °F) k) Vapor pressure

Vapor density No data available

m) Relative density 1.38 g/cm3

n) Water solubility No data available

o) Partition coefficient: n-octanol/water

log Pow: 6.02

p) Autoignition No data available temperature

q) Decomposition temperature

No data available

No data available r) Viscosity s) Explosive properties No data available Oxidizing properties No data available

Other safety information 9.2

No data available

Supelco - 49009 Page 5 of 9

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Hamster - > 5,000 mg/kg

TDLo Oral - Human - 428.5 mg/kg

Remarks: Endocrine: Adrenal cortex hypoplasia.

TDLo Oral - Rat - 6,000 mg/kg

Remarks: Cardiac:Other changes. Gastrointestinal:Other changes. Kidney, Ureter,

Bladder: Changes in both tubules and glomeruli.

TDLo Oral - Rat - 14 mg/kg

Remarks: Liver: Changes in liver weight. Endocrine: Estrogenic. Musculoskeletal: Other

changes.

TDLo Oral - Rat - 2,100 mg/kg

Remarks: Behavioral:Altered sleep time (including change in righting reflex).

Inhalation: No data available

LD50 Dermal - Rabbit - 1,200 mg/kg

Remarks: Behavioral: Excitement. Behavioral: Convulsions or effect on seizure threshold.

Skin irritation No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available No data available

Supelco - 49009 Page 6 of 9

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2A - Group 2A: Probably carcinogenic to humans (2,2-bis(4-Chlorophenyl)-1,1-

dichloro-ethane)

ACGIH: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: KI0700000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC50 - other fish - 1.18 - 9 mg/l - 96.0 h

LC50 - Lepomis macrochirus (Bluegill) - 0.04 - 0.05 mg/l - 96.0 h

LC50 - Oncorhynchus mykiss (rainbow trout) - 0.06 - 0.09 mg/l -

96.0 h

LC50 - Pimephales promelas (fathead minnow) - 3.47 - 5.58 mg/l -

96.0 h

Toxicity to daphnia and other aquatic invertebrates

EC50 - Daphnia pulex (Water flea) - 0.01 mg/l - 48 h

12.2 Persistence and degradability

No data available

Supelco - 49009 Page 7 of 9

12.3 Bioaccumulative potential

Indication of bioaccumulation.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

DOT (US)

UN number: 2811 Class: 6.1 Packing group: III

Proper shipping name: Toxic solids, organic, n.o.s. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-

ethane)

Reportable Quantity (RQ): 1 lbs Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (2,2-bis(4-Chlorophenyl)-1,1-

dichloro-ethane)
Marine pollutant: yes

IATA

UN number: 2811 Class: 6.1 Packing group: III

Proper shipping name: Toxic solid, organic, n.o.s. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-

ethane)

SECTION 15: Regulatory information

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Supelco - 49009 Page 8 of 9

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right to Know Components		
	CAS-No.	Revision Date
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	72-54-8	1993-02-16
2,2-015(4-Ciliotophenyi)-1,1-dicilioto-editalie	/2-34-0	1993-02-10
Pennsylvania Right To Know Components		
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No.	Revision Date
2/2 bio(i dinorophicity); 2/2 didinoro denano	72-54-8	
	/2-54-8	1993-02-16
New Jersey Right To Know Components		
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No.	Revision Date
2,2 bis(i emorophenyi) 1,1 diemoro emane		
	72-54-8	1993-02-16
California Prop. 65 Components		
•	CAS-No.	Revision Date
WARNING! This product contains a chemical known in		
the State of California to cause cancer.2,2-bis(4-	72-54-8	2007-09-28

SECTION 16: Other information

Chlorophenyl)-1,1-dichloro-ethane

Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 8.1 Revision Date: 10/21/2020 Print Date: 09/14/2021

Supelco - 49009 Page 9 of 9





SAFETY DATA SHEET

Version 6.2 Revision Date 04/18/2021 Print Date 09/11/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : 4,4'-DDE

Product Number : 35487

Brand : Sigma-Aldrich CAS-No. : 72-55-9

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301 Carcinogenicity (Category 2), H351

Specific target organ toxicity - repeated exposure, Oral (Category 1), H372

Short-term (acute) aquatic hazard (Category 1), H400 Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Sigma-Aldrich - 35487

Hazard statement(s)	
H301	Toxic if swallowed.
H351	Suspected of causing cancer.
H372	Causes damage to organs through prolonged or repeated exposure if swallowed.
H410	Very toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapors/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : 1,1-Dichloro-2,2-bis(4-chlorophenyl)ethene

Component	Classification	Concentration
2,2-bis(p-Chlorophenyl)-1,1-dichloroethylene		
	Acute Tox. 3; Carc. 2; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H301, H351, H372, H400, H410 M-Factor - Aquatic Acute: 100	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.



SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Consult a physician. Show this material safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Hydrogen chloride gas

Combustible.

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Sigma-Aldrich - 35487

No data available

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.





6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. **Advice on safe handling**

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Advice on protection against fire and explosion

Provide appropriate exhaust ventilation at places where dust is formed.

Hygiene measures

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): 6.1C: Combustible, acute toxic Cat.3 / toxic compounds or compounds which causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.



Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a) Appearance Form: solid

b) Odorc) Odor Thresholdd) pHNo data availableNo data available

e) Melting point/range: 88.0 - 90.0 °C (190.4 - 194.0 °F)

point/freezing pointf) Initial boiling point No data available and boiling range

g) Flash point ()No data available
h) Evaporation rate No data available
i) Flammability (solid, No data available

gas)

No data available

flammability or explosive limits

Upper/lower

k) Vapor pressure < 0.000 hPa

I) Vapor density No data availablem) Relative density No data available

Sigma-Aldrich - 35487



n) Water solubility No data available
 o) Partition coefficient: log Pow: 6.51

 n-octanol/water

p) Autoignition No data available temperature

q) Decomposition No data available temperature

r) Viscosity No data availables) Explosive properties No data availablet) Oxidizing properties No data available

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Strong bases

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 87.0 mg/kg

Remarks: The value is given in analogy to the following substances: 1,1,1-Trichloro-2,2-

bis(4-chlorophenyl)ethane

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Sigma-Aldrich - 35487



Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2A - Group 2A: Probably carcinogenic to humans (2,2-bis(p-Chlorophenyl)-1,1-

dichloroethylene)

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

Remarks:

No data available

The value is given in analogy to the following substances: 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane

Ingestion - Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

11.2 Additional Information

Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 0.01 mg/l - 96 h

Remarks: The value is given in analogy to the following substances:

1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane

Sigma-Aldrich - 35487

LC50 - Lepomis macrochirus (Bluegill sunfish) - 0.01 mg/l - 96 h Remarks: The value is given in analogy to the following substances: 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane

LC50 - Oncorhynchus mykiss (rainbow trout) - 0.003400 mg/l - 96 h Remarks: The value is given in analogy to the following substances: 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane

Toxicity to daphnia and other aquatic invertebrates

Immobilization EC50 - Daphnia magna (Water flea) - 0.00108 mg/l -

48 h

Remarks: The value is given in analogy to the following substances:

1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Gambusia affinis (Mosquito fish) - 33 d

- 3.84 μg/l(2,2-bis(p-Chlorophenyl)-1,1-dichloroethylene)

Bioconcentration factor (BCF): 12,037

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

No data available

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

DOT (US)

UN number: 2811 Class: 6.1 Packing group: III

Sigma-Aldrich - 35487

Millipore

Proper shipping name: Toxic solids, organic, n.o.s. (2,2-bis(p-Chlorophenyl)-1,1-

dichloroethylene)

Reportable Quantity (RQ): 1 lbs

Marine pollutant: yesPoison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (2,2-bis(p-Chlorophenyl)-1,1-

dichloroethylene) Marine pollutant : yes

IATA

UN number: 2811 Class: 6.1 Packing group: III

Proper shipping name: Toxic solid, organic, n.o.s. (2,2-bis(p-Chlorophenyl)-1,1-

dichloroethylene)

SECTION 15: Regulatory information

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard


Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

2,2-bis(p-Chlorophenyl)-1,1-dichloroethylene	CAS-No. 72-55-9	Revision Date 1993-02-16
2,2-bis(p-Chlorophenyl)-1,1-dichloroethylene	CAS-No. 72-55-9	Revision Date 1993-02-16
New Jersey Right To Know Components 2,2-bis(p-Chlorophenyl)-1,1-dichloroethylene	CAS-No. 72-55-9	Revision Date 1993-02-16





SECTION 16: Other information

Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.2 Revision Date: 04/18/2021 Print Date: 09/11/2021



Page 10 of 10

The life science business of Merck KGaA, Darmstadt, Germany

operates as MilliporeSigma in the US and Canada



SAFETY DATA SHEET

Version 6.3 Revision Date 04/18/2021 Print Date 09/11/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : 4,4'-DDT

Product Number : 386340 Brand : Aldrich

Index-No. : 602-045-00-7 CAS-No. : 50-29-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301 Acute toxicity, Dermal (Category 3), H311

Carcinogenicity (Category 2), H351

Specific target organ toxicity - repeated exposure, Oral (Category 1), H372

Short-term (acute) aquatic hazard (Category 1), H400 Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Aldrich - 386340



Signal word	Danger
Hazard statement(s) H301 + H311 H351 H372	Toxic if swallowed or in contact with skin. Suspected of causing cancer. Causes damage to organs through prolonged or repeated exposure if swallowed.
H410	Very toxic to aquatic life with long lasting effects.
Precautionary statement(s) P201 P202 P260 P264 P270 P273 P280	Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not breathe dust/ fume/ gas/ mist/ vapors/ spray. Wash skin thoroughly after handling. Do not eat, drink or smoke when using this product. Avoid release to the environment. Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of water.Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P405 P501	Store locked up. Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane

1,1-Bis(4-chlorophenyl)-2,2,2-trichloroethane

Component	Classification	Concentration
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)etha	ne	
	Acute Tox. 3; Carc. 2; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H301, H311, H351, H372, H400, H410 M-Factor - Aquatic Acute: 100 M-Factor - Aquatic	<= 100 %

Aldrich - 386340



Chronic: 100

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Consult a physician. Show this material safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available



SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. **Advice on safe handling**

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Advice on protection against fire and explosion

Provide appropriate exhaust ventilation at places where dust is formed.

Hygiene measures

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters



Component	CAS-No.	Value	Control parameters	Basis
1,1,1-Trichloro- 2,2-bis(4- chlorophenyl)etha ne	50-29-3	TWA	1 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Confirmed humans	animal carcinoge	en with unknown relevance to
		TWA	0.5 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential O	ccupational Carc	inogen
		TWA	1 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin design	nation	
		TWA	1 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation	on	
		PEL	1 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Millipore SiGMa

Aldrich - 386340

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the EC approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a) Appearance Form: solid

b) Odorc) Odor Thresholdd) pHNo data availableNo data available

e) Melting point/range: 107 - 110 °C (225 - 230 °F) - lit. point/freezing point

f) Initial boiling point 260.0 °C 500.0 °F and boiling range

g) Flash point 72.0 - 77.0 °C (161.6 - 170.6 °F)

h) Evaporation rate No data availablei) Flammability (solid, No data available gas)

j) Upper/lower No data available flammability or

explosive limits

k) Vapor pressure 0.000 hPa at 20.0 °C (68.0 °F)

I) Vapor density No data available
 m) Relative density No data available
 n) Water solubility No data available
 o) Partition coefficient: log Pow: 6.91

Aldrich - 386340



n-octanol/water

No data available p) Autoignition temperature

q) Decomposition temperature

No data available

No data available r) Viscosity s) Explosive properties No data available t) Oxidizing properties No data available

Other safety information 9.2

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents, Iron and iron salts.

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 87.0 mg/kg

Remarks: (RTECS)

Inhalation: No data available

LD50 Dermal - Rabbit - 300.0 mg/kg

Remarks: Behavioral:Tremor. Behavioral: Muscle weakness.

Behavioral: Ataxia.

(RTECS)

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Aldrich - 386340

Page 7 of 11

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Limited evidence of carcinogenicity in animal studies

IARC: 2A - Group 2A: Probably carcinogenic to humans (1,1,1-Trichloro-2,2-bis(4-

chlorophenyl)ethane)

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

Ingestion - Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

11.2 Additional Information

RTECS: KJ3325000

CNS stimulation., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Pancreas. -

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 0.003400 mg/l - 96.0

Immobilization EC50 - Daphnia magna (Water flea) - 0.00108 mg/l -

h

Remarks: (ECOTOX Database)

(Regulation (EC) No 1272/2008, Annex VI)

Toxicity to daphnia

and other aquatic

48 h

invertebrates

Remarks: (ECOTOX Database)

(Regulation (EC) No 1272/2008, Annex VI)

Aldrich - 386340

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Oncorhynchus mykiss (rainbow trout) - 20 d

- 0.001 mg/l(1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)

Bioconcentration factor (BCF): 46,670

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

No data available

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

DOT (US)

UN number: 2811 Class: 6.1 Packing group: III

Proper shipping name: Toxic solids, organic, n.o.s. (1,1,1-Trichloro-2,2-bis(4-

chlorophenyl)ethane)

Reportable Quantity (RQ): 1 lbs

1) Marine pollutant: yesPoison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (1,1,1-Trichloro-2,2-bis(4-

chlorophenyl)ethane) Marine pollutant : yes

IATA

UN number: 2811 Class: 6.1 Packing group: III

Proper shipping name: Toxic solid, organic, n.o.s. (1,1,1-Trichloro-2,2-bis(4-

chlorophenyl)ethane)

Aldrich - 386340

SAFETY DATA SHEET



1. Identification

Product identifier Aldrin (TM) (13C12, 99%) Solution

Other means of identification

Item S-FC89S

Recommended use For Laboratory Use Only

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Chem Service, Inc. Company name 660 Tower Lane **Address**

West Chester, PA 19380

United States

Toll Free 800-452-9994 **Telephone**

Direct 610-692-3026

Website www.chemservice.com E-mail info@chemservice.com

Emergency phone number Chemtrec US 800-424-9300

Chemtrec outside US +1 703-527-3887

2. Hazard(s) identification

Physical hazards Flammable liquids Category 3 **Health hazards** Skin corrosion/irritation Category 2 Serious eye damage/eye irritation Category 2

> Specific target organ toxicity, single exposure Category 3 narcotic effects

Aspiration hazard Category 1

Environmental hazards Hazardous to the aquatic environment, acute

Hazardous to the aquatic environment, Category 1

long-term hazard

Not classified. **OSHA** defined hazards

Label elements



Signal word Danger

Hazard statement Flammable liquid and vapor. May be fatal if swallowed and enters airways. Causes skin irritation.

Causes serious eye irritation. May cause drowsiness or dizziness. Very toxic to aquatic life. Very

Category 1

toxic to aquatic life with long lasting effects.

Precautionary statement Prevention

Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Keep container tightly

closed. Ground/bond container and receiving equipment. Use explosion-proof

electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Avoid breathing mist or vapor. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear

protective gloves/eye protection/face protection.

Material name: Aldrin (TM) (13C12, 99%) Solution S-FC89S Version #: 03 Revision date: 06-05-2018 Issue date: 07-11-2014 **Response** If swallowed: Immediately call a poison center/doctor. Do NOT induce vomiting. If on skin (or hair):

Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before

reuse. In case of fire: Use appropriate media to extinguish. Collect spillage.

Storage Keep cool. Store in a well-ventilated place. Keep container tightly closed. Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise classified (HNOC)

Static accumulating flammable liquid can become electrostatically charged even in bonded and grounded equipment. Sparks may ignite liquid and vapor. May cause flash fire or explosion.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

Ingestion

Chemical name	Common name and synonyms	CAS number	%
n-Nonane		111-84-2	90 - 100
Aldrin (C1312)		Unknown	0.01

4. First-aid measures

Inhalation Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON

CENTER or doctor/physician if you feel unwell.

Symptoms may be delayed.

Skin contactTake off immediately all contaminated clothing. Rinse skin with water/shower. If skin irritation

occurs: Get medical advice/attention. Wash contaminated clothing before reuse.

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if

present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists.

Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If

vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Most important symptoms/effects, acute and

delayed

Indication of immediate medical attention and special treatment needed

redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim under observation.

Aspiration may cause pulmonary edema and pneumonitis. May cause drowsiness and dizziness.

Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing,

General information

Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media

Water fog. Carbon dioxide (CO2). Dry chemical powder, carbon dioxide, sand or earth may be used for small fires only. Alcohol resistant foam.

Unsuitable extinguishing media

Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. This product is a poor conductor of electricity and can become electrostatically charged. If sufficient charge is accumulated, ignition of flammable mixtures can occur. To reduce potential for static discharge, use proper bonding and grounding procedures. This liquid may accumulate static electricity when filling properly grounded containers. Static electricity accumulation may be significantly increased by the presence of small quantities of water or other contaminants. Material will float and may ignite on surface of water. During fire, gases hazardous to health may be formed.

In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do

Special protective equipment and precautions for firefighters

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting equipment/instructions

so without risk.

Specific methods

Use standard firefighting procedures and consider the hazards of other involved materials.

General fire hazards Flammable liquid and vapor.

Material name: Aldrin (TM) (13C12, 99%) Solution

SDS US

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Avoid breathing mist or vapor. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Use appropriate containment to avoid environmental contamination. Transfer by mechanical means such as vacuum truck to a salvage tank or other suitable container for recovery or safe disposal. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.Avoid dust formation.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Take precautionary measures against static discharge. Use only non-sparking tools. Prevent product from entering drains.

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Following product recovery, flush area with water.

Small Spills: Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Environmental precautions

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Use appropriate containment to avoid environmental contamination.

7. Handling and storage

Precautions for safe handling

Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. When using do not smoke. Explosion-proof general and local exhaust ventilation. Minimize fire risks from flammable and combustible materials (including combustible dust and static accumulating liquids) or dangerous reactions with incompatible materials. Handling operations that can promote accumulation of static charges include but are not limited to: mixing, filtering, pumping at high flow rates, splash filling, creating mists or sprays, tank and container filling, tank cleaning, sampling, gauging, switch loading, vacuum truck operations. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Avoid breathing mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

For additional information on equipment bonding and grounding, refer to the Canadian Electrical Code in Canada, (CSA C22.1), or the American Petroleum Institute (API) Recommended Practice 2003, "Protection Against Ignitions Arising out of Static, Lightning, and Stray Currents" or National Fire Protection Association (NFPA) 77, "Recommended Practice on Static Electricity" or National Fire Protection Association (NFPA) 70, "National Electrical Code".

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Eliminate sources of ignition. Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Keep in an area equipped with sprinklers. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

US. ACGIH Threshold Limit Values		
Components	Туре	Value
n-Nonane (CAS 111-84-2)	TWA	200 ppm

US. NIOSH: Pocket Guide to Chemical Hazards

Value Components Type n-Nonane (CAS 111-84-2) TWA 1050 mg/m3

200 ppm **Biological limit values** No biological exposure limits noted for the ingredient(s).

Appropriate engineering

controls

Explosion-proof general and local exhaust ventilation. Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Provide eyewash station. Eye wash fountain and emergency showers are recommended.

Individual protection measures, such as personal protective equipment

Eye/face protection Chemical respirator with organic vapor cartridge and full facepiece.

Skin protection

Hand protection Wear appropriate chemical resistant gloves. Other Wear appropriate chemical resistant clothing.

Respiratory protection Chemical respirator with organic vapor cartridge and full facepiece.

Wear appropriate thermal protective clothing, when necessary. Thermal hazards

General hygiene considerations

When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid. **Form** Liquid. Not available. Color Not available. Odor **Odor threshold** Not available. Not available.

-63.4 °F (-53 °C) lit. / -64.3 °F (-53.5 °C) estimated Melting point/freezing point

Initial boiling point and boiling

range

Flash point

pН

303.8 °F (151 °C) lit.

87.8 °F (31.0 °C) Closed Cup

Evaporation rate Not available. Flammability (solid, gas) Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower

Not available.

(%)

Flammability limit - upper

Not available.

Explosive limit - lower (%) Not available. Explosive limit - upper (%) Not available.

5.93 hPa estimated Vapor pressure

Vapor density Not available. Not available. Relative density

Solubility(ies)

Not available. Solubility (water) **Partition coefficient** Not available.

(n-octanol/water)

401 °F (205 °C) Cambridge **Auto-ignition temperature**

Not available. **Decomposition temperature Viscosity** Not available. Other information

Not explosive. **Explosive properties**

Flammability class Flammable IC estimated

Molecular weight 128.3 g/mol **Oxidizing properties** Not oxidizing. Specific gravity 0.72 estimated

10. Stability and reactivity

Reactivity The product is stable and non-reactive under normal conditions of use, storage and transport.

Material is stable under normal conditions. **Chemical stability** Possibility of hazardous Hazardous polymerization does not occur.

reactions

Conditions to avoid

Avoid heat, sparks, open flames and other ignition sources. Avoid temperatures exceeding the

flash point. Contact with incompatible materials.

Incompatible materials Strong oxidizing agents. Nitrates. Peroxides. Hazardous decomposition No hazardous decomposition products are known.

products

11. Toxicological information

Information on likely routes of exposure

Inhalation May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be

harmful.

Skin contact Causes skin irritation.

Eye contact Causes serious eve irritation.

Ingestion Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious

chemical pneumonia.

Symptoms related to the physical, chemical and toxicological characteristics Aspiration may cause pulmonary edema and pneumonitis. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing,

redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

May be fatal if swallowed and enters airways. **Acute toxicity**

Components	Species	Test Results
n-Nonane (CAS 111-84-2)		

Acute Dermal

LD50 Rabbit > 2000 mg/kg, 24 Hours

Inhalation Vapor

LC50 Rat 17 mg/l, 4 Hours

Causes skin irritation. Skin corrosion/irritation

Causes serious eye irritation. Serious eye damage/eye

irritation

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Not classifiable as to carcinogenicity to humans.

IARC Monographs. Overall Evaluation of Carcinogenicity

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not regulated.

^{*} Estimates for product may be based on additional component data not shown.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicityThis product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity -

single exposure

May cause drowsiness and dizziness.

Specific target organ toxicity -

repeated exposure

Not classified.

Aspiration hazard May be fatal if swallowed and enters airways.

Chronic effects Prolonged inhalation may be harmful.

12. Ecological information

Ecotoxicity Very toxic to aquatic life with long lasting effects.

Persistence and degradability Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

n-Nonane 5.46

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation

potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructionsCollect and reclaim or dispose in sealed containers at licensed waste disposal site. Do not allow

this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches

with chemical or used container. Dispose of contents/container in accordance with

local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste codeThe waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some

product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal.

14. Transport information

DOT

UN number UN1920 UN proper shipping name Nonanes

Transport hazard class(es)

Class 3
Subsidiary risk Label(s) 3
Packing group III

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisions B1, IB3, T2, TP1

Packaging exceptions 150
Packaging non bulk 203
Packaging bulk 242

IATA

UN number UN1920 UN proper shipping name Nonanes

UN proper shipping name Transport hazard class(es)

Class 3
Subsidiary risk Packing group III
Environmental hazards No.
ERG Code 3L

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Material name: Aldrin (TM) (13C12, 99%) Solution

S-FC89S Version #: 03 Revision date: 06-05-2018 Issue date: 07-11-2014

20/) Colution

Other information

Passenger and cargo

Allowed with restrictions.

aircraft

Cargo aircraft only

Allowed with restrictions.

Not established.

IMDG

UN number UN1920 **UN** proper shipping name **NONANES**

Transport hazard class(es) Class 3 Subsidiary risk Ш Packing group

Environmental hazards

Marine pollutant No. F-E, S-E **EmS**

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and

the IBC Code

DOT



IATA; IMDG



15. Regulatory information

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication **US** federal regulations

Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

n-Nonane (CAS 111-84-2) 1.0 % One-Time Export Notification only.

CERCLA Hazardous Substance List (40 CFR 302.4)

n-Nonane (CAS 111-84-2) Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes

Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No

Material name: Aldrin (TM) (13C12, 99%) Solution

S-FC89S Version #: 03 Revision date: 06-05-2018 Issue date: 07-11-2014

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous No

chemical

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act

Not regulated.

Inventory name

(SDWA)

Australia

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material **US** state regulations

Australian Inventory of Chemical Substances (AICS)

is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

Country(s) or region

Canada	Domestic Substances List (DSL)	No
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	No
New Zealand	New Zealand Inventory	No
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	No

United States & Puerto Rico Toxic Substances Control Act (TSCA) Inventory *A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s) A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 07-11-2014 06-05-2018 **Revision date**

Version # 03

NFPA ratings Health: 2

> Flammability: 3 Instability: 0

Material name: Aldrin (TM) (13C12, 99%) Solution

S-FC89S Version #: 03 Revision date: 06-05-2018 Issue date: 07-11-2014

On inventory (yes/no)*

No

No

Disclaimer

The above information is believed to be correct on the date it was last revised and must not be considered all inclusive. The information has been obtained only by a search of available literature and is only a guide for handling the chemicals. OSHA regulations require that if other hazards become evident, an upgraded SDS must be made available to the employee within three months. RESPONSIBILITY for updates lies with the employer and not with CHEM SERVICE, Inc.

Persons not specifically and properly trained should not handle this chemical or its container. This product is furnished FOR LABORATORY USE ONLY! Our products may NOT BE USED as drugs, cosmetics, agricultural or pesticide products, food additives or as household chemicals.

This Safety Data Sheet (SDS) is intended only for use with Chem Service, Inc. products and should not be relied on for use with materials from any other supplier even if the chemical name(s) on the product are identical! Whenever using an SDS for a solution or mixture the user should refer to the SDS for every component of the solution or mixture. Chem Service warrants that this SDS is based upon the most current information available to Chem Service at the time it was last revised. THIS WARRANTY IS EXCLUSIVE, AND CHEM SERVICE, INC. MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. This SDS is provided gratis and CHEM SERVICE, INC. SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR CONTINGENT DAMAGES.

Copyright © 2000-2014 Chem Service, Inc. All rights reserved except that this SDS may be printed for the use of a customer or prospective customer of Chem Service, Inc provided the entire SDS is printed. The SDS may not be placed in any database or otherwise stored or distributed in electronic or any other form.

This product is furnished FOR LABORATORY USE ONLY.

Revision information

This document has undergone significant changes and should be reviewed in its entirety.

SECTION 15: Regulatory information

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania	Diaht T	o Know	Components
Pennsvivania	Right	O KIIOW	Components

1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	CAS-No. 50-29-3	Revision Date 1993-02-16
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	CAS-No. 50-29-3	Revision Date 1993-02-16
New Jersey Right To Know Components 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	CAS-No. 50-29-3	Revision Date 1993-02-16

SECTION 16: Other information

Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the

Aldrich - 386340



Page 10 of 11

information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.3 Revision Date: 04/18/2021 Print Date: 09/11/2021

Aldrich - 386340



Page 11 of 11



SAFETY DATA SHEET

Version 8.1 Revision Date 04/17/2021 Print Date 09/14/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : a-BHC

Product Number : 48493

Brand : Supelco

Index-No. : 602-042-00-0

CAS-No. : 319-84-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301 Acute toxicity, Dermal (Category 4), H312 Carcinogenicity (Category 2), H351

Short-term (acute) aquatic hazard (Category 1), H400 Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram

Signal word Danger

Supelco - 48493

Millipore SigMa

Hazard statement(s) H301 H312 H351 H410	Toxic if swallowed. Harmful in contact with skin. Suspected of causing cancer. Very toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing.
P281	Use personal protective equipment as required.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of soap and water. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : a-1,2,3,4,5,6-Hexachlorocyclohexane

Formula : C6H6Cl6
Molecular weight : 290.83 g/mol
CAS-No. : 319-84-6
EC-No. : 206-270-8
Index-No. : 602-042-00-0

Component	Classification	Concentration	
(1α,2α,3β,4α,5β,6β)-1,2,3,4,5,6-Hexachlorocyclohexane			
	Acute Tox. 3; Acute Tox. 4; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H301, H312, H351, H400, H410 M-Factor - Aquatic Acute: 10	<= 100 %	

For the full text of the H-Statements mentioned in this Section, see Section 16.



SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Consult a physician. Show this material safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.



6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. **Advice on safe handling**

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Advice on protection against fire and explosion

Provide appropriate exhaust ventilation at places where dust is formed.

Hygiene measures

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).



Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a fullface particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

SECTION 9: Physical and chemical properties

Information on basic physical and chemical properties

a)	Appearance	Form: solid
b)	Odor	No data available
c)	Odor Threshold	No data available

No data available Odor Threshold No data available d) pH

156.0 - 161.0 °C (312.8 - 321.8 °F) e) Melting

point/freezing point

Initial boiling point No data available and boiling range

g) Flash point ()No data available h) Evaporation rate No data available Flammability (solid, No data available i)

gas)

No data available

Upper/lower j) flammability or explosive limits

k) Vapor pressure No data available Vapor density No data available m) Relative density No data available n) Water solubility No data available o) Partition coefficient: log Pow: 3.80

n-octanol/water

p) Autoignition temperature No data available



q) Decomposition No data available temperature

r) Viscosity No data availables) Explosive properties No data availablet) Oxidizing properties No data available

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 177.0 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity



This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification. Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans $((1a,2a,3\beta,4a,5\beta,6\beta)$ -

1,2,3,4,5,6-Hexachlorocyclohexane)

IARC: 2B - Group 2B: Possibly carcinogenic to humans $((1a,2a,3\beta,4a,5\beta,6\beta)$ -

1,2,3,4,5,6-Hexachlorocyclohexane)

ACGIH: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a carcinogen or potential carcinogen by ACGIH.

NTP: RAHC - Reasonably anticipated to be a human carcinogen ((1α,2α,3β,4α,5β,6β)-

1,2,3,4,5,6-Hexachlorocyclohexane)

NTP: RAHC - Reasonably anticipated to be a human carcinogen $((1a,2a,3\beta,4a,5\beta,6\beta)$ -

1,2,3,4,5,6-Hexachlorocyclohexane)

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

11.2 Additional Information

RTECS: GV3500000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC50 - Carassius auratus (goldfish) - 0.12 mg/l - 48.0 h

LC50 - Cyprinus carpio (Carp) - 0.2 mg/l - 48.0 h

LC50 - other fish - 1.49 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates

EC50 - Daphnia magna (Water flea) - 0.20 - 1.70 mg/l - 48 h



Toxicity to algae EC50 - No information available. - > 100.00 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation other fish - 96 h

- 0.8 mg/l($(1\alpha,2\alpha,3\beta,4\alpha,5\beta,6\beta)$ -1,2,3,4,5,6-Hexachlorocyclohexane)

Bioconcentration factor (BCF): 250

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

DOT (US)

UN number: 2811 Class: 6.1 Packing group: III

Proper shipping name: Toxic solids, organic, n.o.s. $((1a,2a,3\beta,4a,5\beta,6\beta)-1,2,3,4,5,6-1,2,4,5,6-1,2,4,5-1,2,4,5-1$

Hexachlorocyclohexane)

Reportable Quantity (RQ): 10 lbs

1) Marine pollutant: yesPoison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. ((1a,2a,3 β ,4a,5 β ,6 β)-1,2,3,4,5,6-

Hexachlorocyclohexane)

IATA

UN number: 2811 Class: 6.1 Packing group: III

Proper shipping name: Toxic solid, organic, n.o.s. $((1a,2a,3\beta,4a,5\beta,6\beta)-1,2,3,4,5,6-$

Hexachlorocyclohexane)

Supelco - 48493

Millipore Sigma

SECTION 15: Regulatory information

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

. Revision Date
-6 2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
(1α,2α,3β,4α,5β,6β)-1,2,3,4,5,6-	319-84-6	2007-07-01
Hexachlorocyclohexane		

Pennsylvania Right To Know Components

(1α,2α,3β,4α,5β,6β)-1,2,3,4,5,6-	CAS-No.	Revision Date
Hexachlorocyclohexane	319-84-6	2007-07-01

California Prop. 65 Components

, which is/are known to the State of California to cause	CAS-No.	Revision Date
cancer. For more information go to	319-84-6	2009-02-01
www.P65Warnings.ca.gov.(1α,2α,3β,4α,5β,6β)-		
1,2,3,4,5,6-Hexachlorocyclohexane		

WARNING! This product contains a chemical known in	CAS-No.	Revision Date
the State of California to cause	319-84-6	2009-02-01
cancer.(1α,2α,3β,4α,5β,6β)-1,2,3,4,5,6-		
Hexachlorocyclohexane		

SECTION 16: Other information

Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Millipore

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 8.1 Revision Date: 04/17/2021 Print Date: 09/14/2021



SAFETY DATA SHEET



1. Identification

Product identifier cis-Chlordane

Other means of identification

Product code N-11480

Synonym(s) alpha Chlordane

Recommended use For Laboratory Use Only

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name Chem Service, Inc. **Address** 660 Tower Lane

West Chester, PA 19380

United States

Toll Free 800-452-9994 **Telephone**

Direct 610-692-3026

Website www.chemservice.com E-mail info@chemservice.com

Chemtrec US **Emergency phone number**

800-424-9300 Chemtrec outside US +1 703-527-3887

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Acute toxicity, oral Category 3

> Acute toxicity, dermal Category 3 Acute toxicity, inhalation Category 2 Carcinogenicity Category 2 Reproductive toxicity Category 2

Environmental hazards Hazardous to the aquatic environment, acute Category 1

Hazardous to the aquatic environment, Category 1

long-term hazard

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Toxic if swallowed. Toxic in contact with skin. Fatal if inhaled. Suspected of causing cancer.

Suspected of damaging fertility or the unborn child. Very toxic to aquatic life. Very toxic to aquatic

life with long lasting effects.

Precautionary statement

Prevention Obtain special instructions before use. Do not handle until all safety precautions have been read

and understood. Use only outdoors or in a well-ventilated area. Do not breathe dust/fume. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection. Wear

respiratory protection.

Response If swallowed: Immediately call a poison center/doctor. If on skin: Wash with plenty of water. If

inhaled: Remove person to fresh air and keep comfortable for breathing. Immediately call a poison center/doctor. Specific treatment is urgent (see this label). Rinse mouth. Take off

immediately all contaminated clothing and wash it before reuse. Collect spillage.

Storage Store in a well-ventilated place. Keep container tightly closed. Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise None known.

classified (HNOC)

Material name: cis-Chlordane SDS US

3. Composition/information on ingredients

Substances

Chemical name	Common name and synonyms	CAS number	%
cis-Chlordane	alpha Chlordane	5103-71-9	100

^{*}Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation Remove victim to fresh air and keep at rest in a position comfortable for breathing. Oxygen or artificial respiration if needed. Do not use mouth-to-mouth method if victim inhaled the substance.

Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Call a physician or poison control center immediately.

Skin contact Take off immediately all contaminated clothing. Wash off with soap and plenty of water. Call a

POISON CENTER or doctor/physician if you feel unwell. Get medical attention if irritation develops

and persists.

Do not rub eyes. Immediately flush eyes with plenty of water for at least 15 minutes. Remove Eye contact

contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation

develops and persists.

Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting without Ingestion

advice from poison control center. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Do not use mouth-to-mouth method if victim ingested the substance. Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other

proper respiratory medical device.

Most important symptoms/effects, acute and delayed

Direct contact with eyes may cause temporary irritation.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

General information

Take off immediately all contaminated clothing. IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing

media

Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).

Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

Special protective equipment and precautions for firefighters During fire, gases hazardous to health may be formed.

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire-fighting equipment/instructions

Use water spray to cool unopened containers.

Use standard firefighting procedures and consider the hazards of other involved materials. Specific methods General fire hazards No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Immediately evacuate personnel to safe areas. Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate protective equipment and clothing during clean-up. Do not breathe dust. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Avoid dispersal of dust in the air (i.e., clearing dust surfaces with compressed air). This material is classified as a water pollutant under the Clean Water Act and should be prevented from contaminating soil or from entering sewage and drainage systems which lead to waterways. Stop the flow of material, if this is without risk. Collect spillage.

Large Spills: Wet down with water and dike for later disposal. Following product recovery, flush area with water.

Small Spills: Sweep up or vacuum up spillage and collect in suitable container for disposal.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Material name: cis-Chlordane

Environmental precautions

Avoid release to the environment. Contact local authorities in case of spillage to drain/aquatic environment. Prevent further leakage or spillage if safe to do so. Do not contaminate water. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Minimize dust generation and accumulation. Do not breathe dust. Do not taste or swallow. Avoid contact with skin. Avoid contact with eyes. Avoid contact during pregnancy/while nursing. Avoid prolonged exposure. Avoid contact with clothing. Use only outdoors or in a well-ventilated area. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. When using, do not eat, drink or smoke. Wash hands thoroughly after handling. Wash contaminated clothing before reuse. Avoid release to the environment. Do not empty into drains.

Conditions for safe storage, including any incompatibilities

Store locked up. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Material	Туре	Value	
cis-Chlordane (CAS 5103-71-9)	PEL	0.5 mg/m3	
US. ACGIH Threshold Limit Val	lues		
Material	Туре	Value	
cis-Chlordane (CAS 5103-71-9)	TWA	0.5 mg/m3	
US. NIOSH: Pocket Guide to Ch	nemical Hazards		
Material	Туре	Value	
cis-Chlordane (CAS 5103-71-9)	TWA	0.5 mg/m3	

Biological limit values

No biological exposure limits noted for the ingredient(s).

Exposure guidelines

US - California OELs: Skin designation

cis-Chlordane (CAS 5103-71-9) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

cis-Chlordane (CAS 5103-71-9) Skin designation applies.

US - Tennesse OELs: Skin designation

cis-Chlordane (CAS 5103-71-9) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

cis-Chlordane (CAS 5103-71-9)

Can be absorbed through the skin.

US NIOSH Pocket Guide to Chemical Hazards: Skin designation

cis-Chlordane (CAS 5103-71-9) Can be absorbed through the skin.

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

cis-Chlordane (CAS 5103-71-9)

Can be absorbed through the skin.

Appropriate engineering

controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear eye/face protection. Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear protective gloves.

Other Wear appropriate chemical resistant clothing.

Respiratory protection Wear positive pressure self-contained breathing apparatus (SCBA).

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely

wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Material name: cis-Chlordane sps us

Physical state Solid.

Form Solid. Crystalline Solid

White Color

Odor Not available. **Odor threshold** Not available. Not available. рH

222.8 - 224.6 °F (106 - 107 °C) Melting point/freezing point 347 °F (175 °C) 0.133322 kPa Initial boiling point and boiling

range

Flash point 225.0 °F (107.2 °C) Open Cup

Not available. **Evaporation rate** Not available. Flammability (solid, gas) Upper/lower flammability or explosive limits

Flammability limit - lower

(%)

Not available.

Flammability limit - upper

(%)

Not available.

Not available. Explosive limit - lower (%) Explosive limit - upper (%) Not available. Vapor pressure 0 kPa at 25 °C

Vapor density

Relative density Not available.

Solubility(ies)

0 g/l Solubility (water) **Partition coefficient** 5.2

(n-octanol/water)

Not available. **Auto-ignition temperature Decomposition temperature** Not available. **Viscosity** Not available

Other information

Density 1.59 g/ml

Combustible IIIB estimated Flammability class

C10-H6-CI8 Molecular formula Molecular weight 409.8 g/mol

Specific gravity 1.59 - 1.63 at 25 °C

10. Stability and reactivity

Reactivity The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions. Possibility of hazardous Hazardous polymerization does not occur.

reactions

Avoid temperatures exceeding the flash point. Contact with incompatible materials.

Strong oxidizing agents. Incompatible materials

Hazardous decomposition

Conditions to avoid

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Toxic if swallowed. Ingestion Fatal if inhaled. Inhalation

Skin contact Toxic in contact with skin.

Eye contact Direct contact with eyes may cause temporary irritation. Direct contact with eyes may cause temporary irritation. Symptoms related to the

physical, chemical and toxicological characteristics

Information on toxicological effects

Fatal if inhaled. Toxic if swallowed. Toxic in contact with skin. **Acute toxicity**

Test Results Product Species cis-Chlordane (CAS 5103-71-9)

Acute Dermal		
LD50	Rat	590 - 840 mg/kg
Inhalation		
LC50	Cat	0.1 mg/l, 4 Hours
Oral		
LD50	Mouse	430 mg/kg
	Rabbit	300 mg/kg
	Rat	590 mg/kg
TD	Rat	25 mg/kg
Other		
LD50	Rat	343 mg/kg

^{*} Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation. Serious eye damage/eye Direct contact with eyes may cause temporary irritation.

irritation

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Suspected of causing cancer. IARC Monographs. Overall Evaluation of Carcinogenicity

> cis-Chlordane (CAS 5103-71-9) 2B Possibly carcinogenic to humans.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Suspected of damaging fertility or the unborn child. Reproductive toxicity

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Not classified.

Not available. **Aspiration hazard**

Chronic effects Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Very toxic to aquatic life with long lasting effects. Accumulation in aquatic organisms is expected.

Product Species Test Results

cis-Chlordane (CAS 5103-71-9)

Aquatic

Fish LC50 0.0043 - 0.0118 mg/l, 96 hours Bluegill (Lepomis macrochirus)

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential Not available. Partition coefficient n-octanol / water (log Kow)

5.16

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation

potential, endocrine disruption, global warming potential) are expected from this component.

Material name: cis-Chlordane SDS US 5/9

13144 Version #: 01 Issue date: 06-12-2014

^{*} Estimates for product may be based on additional component data not shown.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material

and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international

regulations.

Local disposal regulations

Dispose in accordance with all applicable regulations.

Hazardous waste code

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

US RCRA Hazardous Waste U List: Reference

cis-Chlordane (CAS 5103-71-9)

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is

emptied.

14. Transport information

DOT

UN number UN2811

UN proper shipping name

Toxic solids, organic, n.o.s. (cis-Chlordane), MARINE POLLUTANT

Transport hazard class(es)

Class 6.1(PGIII)

Subsidiary risk 6.1 Label(s) **Packing group** Ш

Environmental hazards

Marine pollutant Yes

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisions IB8, IP3, T1, TP33

153 Packaging exceptions Packaging non bulk 213 Packaging bulk 240

IATA

UN number UN2811

UN proper shipping name Transport hazard class(es) Toxic solid, organic, n.o.s. (cis-Chlordane)

Class 6.1(PGIII)

Subsidiary risk Ш Packing group **Environmental hazards** No. **ERG Code** 6L

Other information

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Passenger and cargo

aircraft

Allowed.

Cargo aircraft only

Allowed.

Not applicable.

IMDG

UN number UN2811

UN proper shipping name Transport hazard class(es) TOXIC SOLID, ORGANIC, N.O.S. (cis-Chlordane), MARINE POLLUTANT

6.1(PGIII) Class

Subsidiary risk Ш **Packing group**

Environmental hazards

Marine pollutant Yes **EmS** F-A. S-A

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and

the IBC Code

Material name: cis-Chlordane SDS US

SAFETY DATA SHEET



1. Identification

Product identifier cis-Chlordane

Other means of identification

Product code N-11480

Synonym(s) alpha Chlordane

Recommended use For Laboratory Use Only

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name Chem Service, Inc. **Address** 660 Tower Lane

West Chester, PA 19380

United States

Toll Free 800-452-9994 **Telephone**

Direct 610-692-3026

Website www.chemservice.com E-mail info@chemservice.com

Chemtrec US **Emergency phone number**

800-424-9300 Chemtrec outside US +1 703-527-3887

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Acute toxicity, oral Category 3

> Acute toxicity, dermal Category 3 Acute toxicity, inhalation Category 2 Carcinogenicity Category 2 Reproductive toxicity Category 2

Environmental hazards Hazardous to the aquatic environment, acute Category 1

Hazardous to the aquatic environment, Category 1

long-term hazard

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Toxic if swallowed. Toxic in contact with skin. Fatal if inhaled. Suspected of causing cancer.

Suspected of damaging fertility or the unborn child. Very toxic to aquatic life. Very toxic to aquatic

life with long lasting effects.

Precautionary statement

Prevention Obtain special instructions before use. Do not handle until all safety precautions have been read

and understood. Use only outdoors or in a well-ventilated area. Do not breathe dust/fume. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection. Wear

respiratory protection.

Response If swallowed: Immediately call a poison center/doctor. If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. Immediately call a

poison center/doctor. Specific treatment is urgent (see this label). Rinse mouth. Take off

immediately all contaminated clothing and wash it before reuse. Collect spillage.

Storage Store in a well-ventilated place. Keep container tightly closed. Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise None known.

classified (HNOC)

Material name: cis-Chlordane SDS US

3. Composition/information on ingredients

Substances

Chemical name	Common name and synonyms	CAS number	%
cis-Chlordane	alpha Chlordane	5103-71-9	100

^{*}Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation Remove victim to fresh air and keep at rest in a position comfortable for breathing. Oxygen or artificial respiration if needed. Do not use mouth-to-mouth method if victim inhaled the substance.

Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Call a physician or poison control center immediately.

Skin contact Take off immediately all contaminated clothing. Wash off with soap and plenty of water. Call a

POISON CENTER or doctor/physician if you feel unwell. Get medical attention if irritation develops

and persists.

Do not rub eyes. Immediately flush eyes with plenty of water for at least 15 minutes. Remove Eye contact

contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation

develops and persists.

Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting without Ingestion

advice from poison control center. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Do not use mouth-to-mouth method if victim ingested the substance. Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other

proper respiratory medical device.

Most important symptoms/effects, acute and delayed

Direct contact with eyes may cause temporary irritation.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. In case of shortness of breath, give oxygen. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

General information

Take off immediately all contaminated clothing. IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing

media

Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).

Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from

the chemical

During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Fire-fighting equipment/instructions

Specific methods General fire hazards Use water spray to cool unopened containers.

Use standard firefighting procedures and consider the hazards of other involved materials.

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Immediately evacuate personnel to safe areas. Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate protective equipment and clothing during clean-up. Do not breathe dust. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Avoid dispersal of dust in the air (i.e., clearing dust surfaces with compressed air). This material is classified as a water pollutant under the Clean Water Act and should be prevented from contaminating soil or from entering sewage and drainage systems which lead to waterways. Stop the flow of material, if this is without risk. Collect spillage.

Large Spills: Wet down with water and dike for later disposal. Following product recovery, flush area with water.

Small Spills: Sweep up or vacuum up spillage and collect in suitable container for disposal.

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS.

Material name: cis-Chlordane

Environmental precautions

Avoid release to the environment. Contact local authorities in case of spillage to drain/aquatic environment. Prevent further leakage or spillage if safe to do so. Do not contaminate water. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Minimize dust generation and accumulation. Do not breathe dust. Do not taste or swallow. Avoid contact with skin. Avoid contact with eyes. Avoid contact during pregnancy/while nursing. Avoid prolonged exposure. Avoid contact with clothing. Use only outdoors or in a well-ventilated area. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. When using, do not eat, drink or smoke. Wash hands thoroughly after handling. Wash contaminated clothing before reuse. Avoid release to the environment. Do not empty into drains.

Conditions for safe storage, including any incompatibilities

Store locked up. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Material	Туре	Value	
cis-Chlordane (CAS 5103-71-9)	PEL	0.5 mg/m3	
US. ACGIH Threshold Limit Val	lues		
Material	Туре	Value	
cis-Chlordane (CAS 5103-71-9)	TWA	0.5 mg/m3	
US. NIOSH: Pocket Guide to Ch	nemical Hazards		
Material	Туре	Value	
cis-Chlordane (CAS 5103-71-9)	TWA	0.5 mg/m3	

Biological limit values

No biological exposure limits noted for the ingredient(s).

Exposure guidelines

US - California OELs: Skin designation

cis-Chlordane (CAS 5103-71-9) Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

cis-Chlordane (CAS 5103-71-9) Skin designation applies.

US - Tennesse OELs: Skin designation

cis-Chlordane (CAS 5103-71-9) Can be absorbed through the skin.

US ACGIH Threshold Limit Values: Skin designation

cis-Chlordane (CAS 5103-71-9)

Can be absorbed through the skin.

US NIOSH Pocket Guide to Chemical Hazards: Skin designation

cis-Chlordane (CAS 5103-71-9) Can be absorbed through the skin.

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

cis-Chlordane (CAS 5103-71-9)

Can be absorbed through the skin.

Appropriate engineering

controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear eye/face protection. Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear protective gloves.

Other Wear appropriate chemical resistant clothing.

Respiratory protection Wear positive pressure self-contained breathing apparatus (SCBA).

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely

wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Material name: cis-Chlordane sps us

Physical state Solid.

Form Solid. Crystalline Solid

White Color

Odor Not available. **Odor threshold** Not available. Not available. рH

222.8 - 224.6 °F (106 - 107 °C) Melting point/freezing point 347 °F (175 °C) 0.133322 kPa Initial boiling point and boiling

range

Flash point 225.0 °F (107.2 °C) Open Cup

Not available. **Evaporation rate** Not available. Flammability (solid, gas) Upper/lower flammability or explosive limits

Flammability limit - lower

(%)

Not available.

Flammability limit - upper

(%)

Not available.

Not available. Explosive limit - lower (%) Explosive limit - upper (%) Not available. Vapor pressure 0 kPa at 25 °C

Vapor density

Relative density Not available.

Solubility(ies)

0 g/l Solubility (water) **Partition coefficient** 5.2

(n-octanol/water)

Not available. **Auto-ignition temperature Decomposition temperature** Not available. **Viscosity** Not available

Other information

Density 1.59 g/ml

Combustible IIIB estimated Flammability class

C10-H6-CI8 Molecular formula Molecular weight 409.8 g/mol

Specific gravity 1.59 - 1.63 at 25 °C

10. Stability and reactivity

Reactivity The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions. Possibility of hazardous Hazardous polymerization does not occur.

reactions

Avoid temperatures exceeding the flash point. Contact with incompatible materials.

Strong oxidizing agents. Incompatible materials

Hazardous decomposition

Conditions to avoid

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Toxic if swallowed. Ingestion Fatal if inhaled. Inhalation

Skin contact Toxic in contact with skin.

Eye contact Direct contact with eyes may cause temporary irritation. Direct contact with eyes may cause temporary irritation. Symptoms related to the

physical, chemical and toxicological characteristics

Information on toxicological effects

Fatal if inhaled. Toxic if swallowed. Toxic in contact with skin. **Acute toxicity**

Test Results Product Species cis-Chlordane (CAS 5103-71-9)

Acute Dermal		
LD50	Rat	590 - 840 mg/kg
Inhalation		
LC50	Cat	0.1 mg/l, 4 Hours
Oral		
LD50	Mouse	430 mg/kg
	Rabbit	300 mg/kg
	Rat	590 mg/kg
TD	Rat	25 mg/kg
Other		
LD50	Rat	343 mg/kg

^{*} Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation. Serious eye damage/eye Direct contact with eyes may cause temporary irritation.

irritation

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Suspected of causing cancer. IARC Monographs. Overall Evaluation of Carcinogenicity

> cis-Chlordane (CAS 5103-71-9) 2B Possibly carcinogenic to humans.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Suspected of damaging fertility or the unborn child. Reproductive toxicity

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Not classified.

Not available. **Aspiration hazard**

Chronic effects Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Very toxic to aquatic life with long lasting effects. Accumulation in aquatic organisms is expected.

Product Species Test Results

cis-Chlordane (CAS 5103-71-9)

Aquatic

Fish LC50 0.0043 - 0.0118 mg/l, 96 hours Bluegill (Lepomis macrochirus)

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential Not available. Partition coefficient n-octanol / water (log Kow)

5.16

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation

potential, endocrine disruption, global warming potential) are expected from this component.

Material name: cis-Chlordane SDS US 5/9

13144 Version #: 01 Issue date: 06-12-2014

^{*} Estimates for product may be based on additional component data not shown.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. This material

and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international

regulations.

Local disposal regulations

Dispose in accordance with all applicable regulations.

Hazardous waste code

The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

US RCRA Hazardous Waste U List: Reference

cis-Chlordane (CAS 5103-71-9)

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is

emptied.

14. Transport information

DOT

UN number UN2811

UN proper shipping name

Toxic solids, organic, n.o.s. (cis-Chlordane), MARINE POLLUTANT

Transport hazard class(es)

Class 6.1(PGIII)

Subsidiary risk 6.1 Label(s) **Packing group** Ш

Environmental hazards

Marine pollutant Yes

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisions IB8, IP3, T1, TP33

153 Packaging exceptions Packaging non bulk 213 Packaging bulk 240

IATA

UN number UN2811

UN proper shipping name Transport hazard class(es) Toxic solid, organic, n.o.s. (cis-Chlordane)

Class 6.1(PGIII)

Subsidiary risk Ш Packing group **Environmental hazards** No. **ERG Code** 6L

Other information

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Passenger and cargo

aircraft

Allowed.

Cargo aircraft only

Allowed.

Not applicable.

IMDG

UN number UN2811

UN proper shipping name Transport hazard class(es) TOXIC SOLID, ORGANIC, N.O.S. (cis-Chlordane), MARINE POLLUTANT

6.1(PGIII) Class

Subsidiary risk Ш **Packing group**

Environmental hazards

Marine pollutant Yes **EmS** F-A. S-A

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and

the IBC Code

Material name: cis-Chlordane SDS US



IATA; IMDG



Marine pollutant



15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

One or more components are not listed on TSCA.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

cis-Chlordane (CAS 5103-71-9)

Listed.

SARA 304 Emergency release notification

cis-Chlordane (CAS 5103-71-9)

1 LBS

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes

Delayed Hazard - Yes Fire Hazard - No Pressure Hazard - No Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Chemical name	CAS number	Reportable quantity	Threshold planning quantity	Threshold planning quantity, lower value	Threshold planning quantity, upper value

cis-Chlordane 5103-71-9 1 1000 lbs

SARA 311/312 Hazardous Yes

chemical

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
cis-Chlordane	5103-71-9	100

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

cis-Chlordane (CAS 5103-71-9)

Material name: cis-Chlordane

13144 Version #: 01 Issue date: 06-12-2014

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Clean Water Act (CWA)

Hazardous substance

Section 112(r) (40 CFR

68.130)

Safe Drinking Water Act 0 mg/l (SDWA) 0.002 mg/l

US state regulations

US. Massachusetts RTK - Substance List

cis-Chlordane (CAS 5103-71-9)

US. New Jersey Worker and Community Right-to-Know Act

cis-Chlordane (CAS 5103-71-9) 500 LBS

US. Pennsylvania RTK - Hazardous Substances

cis-Chlordane (CAS 5103-71-9)

US. Rhode Island RTK

Not regulated.

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

Inventory name

cis-Chlordane (CAS 5103-71-9) Listed: July 1, 1988

International Inventories

Country(s) or region

Australia	Australian Inventory of Chemical Substances (AICS)	No
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	No

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 06-12-2014

Version # 01

NFPA ratings Health: 2

Flammability: 1 Instability: 0

Material name: cis-Chlordane sps us

On inventory (yes/no)*

Disclaimer

The above information is believed to be correct on the date it was last revised and must not be considered all inclusive. The information has been obtained only by a search of available literature and is only a guide for handling the chemicals. OSHA regulations require that if other hazards become evident, an upgraded SDS must be made available to the employee within three months. RESPONSIBILITY for updates lies with the employer and not with CHEM SERVICE, Inc.

Persons not specifically and properly trained should not handle this chemical or its container. This product is furnished FOR LABORATORY USE ONLY! Our products may NOT BE USED as drugs, cosmetics, agricultural or pesticide products, food additives or as household chemicals.

This Safety Data Sheet (SDS) is intended only for use with Chem Service, Inc. products and should not be relied on for use with materials from any other supplier even if the chemical name(s) on the product are identical! Whenever using an SDS for a solution or mixture the user should refer to the SDS for every component of the solution or mixture. Chem Service warrants that this SDS is based upon the most current information available to Chem Service at the time it was last revised. THIS WARRANTY IS EXCLUSIVE, AND CHEM SERVICE, INC. MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. This SDS is provided gratis and CHEM SERVICE, INC. SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR CONTINGENT DAMAGES.

Copyright © 2000-2014 Chem Service, Inc. All rights reserved except that this SDS may be printed for the use of a customer or prospective customer of Chem Service, Inc provided the entire SDS is printed. The SDS may not be placed in any database or otherwise stored or distributed in electronic or any other form.

This product is furnished FOR LABORATORY USE ONLY.

Material name: cis-Chlordane sps us



IATA; IMDG



Marine pollutant



15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

One or more components are not listed on TSCA.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

cis-Chlordane (CAS 5103-71-9)

Listed.

SARA 304 Emergency release notification

cis-Chlordane (CAS 5103-71-9)

1 LBS

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes

Delayed Hazard - Yes Fire Hazard - No Pressure Hazard - No Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Chemical name	CAS number	Reportable quantity	Threshold planning quantity	Threshold planning quantity, lower value	Threshold planning quantity, upper value
---------------	------------	---------------------	-----------------------------	--	--

cis-Chlordane 5103-71-9 1 1000 lbs

SARA 311/312 Hazardous Yes

chemical

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
cis-Chlordane	5103-71-9	100

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

cis-Chlordane (CAS 5103-71-9)

Material name: cis-Chlordane

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Clean Water Act (CWA)

Hazardous substance

Section 112(r) (40 CFR

68.130)

Safe Drinking Water Act 0 mg/l (SDWA) 0.002 mg/l

US state regulations

US. Massachusetts RTK - Substance List

cis-Chlordane (CAS 5103-71-9)

US. New Jersey Worker and Community Right-to-Know Act

cis-Chlordane (CAS 5103-71-9) 500 LBS

US. Pennsylvania RTK - Hazardous Substances

cis-Chlordane (CAS 5103-71-9)

US. Rhode Island RTK

Not regulated.

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

Inventory name

cis-Chlordane (CAS 5103-71-9) Listed: July 1, 1988

International Inventories

Country(s) or region

Australia	Australian Inventory of Chemical Substances (AICS)	No
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	No

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 06-12-2014

Version # 01

NFPA ratings Health: 2

Flammability: 1 Instability: 0

Material name: cis-Chlordane sps us

On inventory (yes/no)*

Disclaimer

The above information is believed to be correct on the date it was last revised and must not be considered all inclusive. The information has been obtained only by a search of available literature and is only a guide for handling the chemicals. OSHA regulations require that if other hazards become evident, an upgraded SDS must be made available to the employee within three months. RESPONSIBILITY for updates lies with the employer and not with CHEM SERVICE, Inc.

Persons not specifically and properly trained should not handle this chemical or its container. This product is furnished FOR LABORATORY USE ONLY! Our products may NOT BE USED as drugs, cosmetics, agricultural or pesticide products, food additives or as household chemicals.

This Safety Data Sheet (SDS) is intended only for use with Chem Service, Inc. products and should not be relied on for use with materials from any other supplier even if the chemical name(s) on the product are identical! Whenever using an SDS for a solution or mixture the user should refer to the SDS for every component of the solution or mixture. Chem Service warrants that this SDS is based upon the most current information available to Chem Service at the time it was last revised. THIS WARRANTY IS EXCLUSIVE, AND CHEM SERVICE, INC. MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. This SDS is provided gratis and CHEM SERVICE, INC. SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR CONTINGENT DAMAGES.

Copyright © 2000-2014 Chem Service, Inc. All rights reserved except that this SDS may be printed for the use of a customer or prospective customer of Chem Service, Inc provided the entire SDS is printed. The SDS may not be placed in any database or otherwise stored or distributed in electronic or any other form.

This product is furnished FOR LABORATORY USE ONLY.

Material name: cis-Chlordane sps us



SAFETY DATA SHEET

Version 6.3 Revision Date 04/17/2021 Print Date 09/11/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : δ -BHC

Product Number : 48495
Brand : Supelco
Index-No. : 602-042-00-0
CAS-No. : 319-86-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301 Acute toxicity, Dermal (Category 4), H312 Carcinogenicity (Category 2), H351

Short-term (acute) aquatic hazard (Category 1), H400 Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Supelco - 48495



Hazard statement(s) H301 H312 H351 H410	Toxic if swallowed. Harmful in contact with skin. Suspected of causing cancer. Very toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of water. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : δ -1,2,3,4,5,6-Hexachlorocyclohexane

Formula : C6H6Cl6

Molecular weight : 290.8 g/mol

CAS-No. : 319-86-8

EC-No. : 206-272-9

Index-No. : 602-042-00-0

Component	Classification	Concentration	
1α,2α,3α,4β,5α,6β)-1,2,3,4,5,6-Hexachlorocyclohexane			
	Acute Tox. 3; Acute Tox.	<= 100 %	
	4; Carc. 2; Aquatic Acute		
	1; Aquatic Chronic 1;		
	H301, H312, H351, H400,		
	H410		
	M-Factor - Aquatic Acute:		
	10 - Aquatic Chronic: 10		

For the full text of the H-Statements mentioned in this Section, see Section 16.



SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Consult a physician. Show this material safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Supelco - 48495



6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. **Advice on safe handling**

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Advice on protection against fire and explosion

Provide appropriate exhaust ventilation at places where dust is formed.

Hygiene measures

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Supelco - 48495



Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail

sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the EC approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a) Appearance Form: solid

b) Odor
 c) Odor Threshold
 d) pH
 e) Melting point/freezing point
 No data available
 No data available

Initial boiling point

No data available

and boiling range Supelco - 48495



Flash point	()No data available
Evaporation rate	No data available
Flammability (solid, gas)	No data available
Upper/lower flammability or explosive limits	No data available
Vapor pressure	No data available
Vapor density	No data available
Relative density	No data available
Water solubility	No data available
Partition coefficient: n-octanol/water	No data available
Autoignition temperature	No data available
Decomposition temperature	No data available
Viscosity	No data available
Explosive properties	No data available
Oxidizing properties	No data available
	Evaporation rate Flammability (solid, gas) Upper/lower flammability or explosive limits Vapor pressure Vapor density Relative density Water solubility Partition coefficient: n-octanol/water Autoignition temperature Decomposition temperature Viscosity Explosive properties

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

In the event of fire: see section 5



SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 1,000 mg/kg

Remarks: (RTECS)

Inhalation: No data available

Acute toxicity estimate Dermal - Expert judgment - 1,100.1 mg/kg

Remarks: (in analogy to similar products)

The value is given in analogy to the following substances: 1,2,3,4,5,6-

hexachlorcyclohexanes with the exception of gamma-HCH

Acute toxicity estimate Dermal - 1,100.1 mg/kg

(Expert judgment) No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Suspected of causing cancer.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (1a,2a,3a,4β,5a,6β)-

1,2,3,4,5,6-Hexachlorocyclohexane)

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

11.2 Additional Information

RTECS: GV4550000



To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Central nervous system -

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 0.02 mg/l - 96 h

Remarks: (ECOTOX Database) (in analogy to similar products)

The value is given in analogy to the following substances:

1,2,3,4,5,6-hexachlorcyclohexanes with the exception of gamma-

HCH

Toxicity to daphnia and other aquatic invertebrates

EC50 - Daphnia pulex (Water flea) - 0.68 mg/l - 48 h

Remarks: (ECOTOX Database) (in analogy to similar products)

The value is given in analogy to the following substances:

1,2,3,4,5,6-hexachlorcyclohexanes with the exception of gamma-

HCH

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation other fish - 33 d

 $-0.955 \text{ mg/l}(1a,2a,3a,4\beta,5a,6\beta)-1,2,3,4,5,6-$

Hexachlorocyclohexane)

Bioconcentration factor (BCF): 326

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

No data available

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix

Supelco - 48495



the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

DOT (US)

UN number: 3077 Class: 9 Packing group: III

Proper shipping name: Environmentally hazardous substance, solid, n.o.s.

 $(1a,2a,3a,4\beta,5a,6\beta)-1,2,3,4,5,6$ -Hexachlorocyclohexane)

Reportable Quantity (RQ): 1 lbs Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.

 $(1a,2a,3a,4\beta,5a,6\beta)-1,2,3,4,5,6$ -Hexachlorocyclohexane)

Marine pollutant : yes

IATA

UN number: 3077 Class: 9 Packing group: III

Proper shipping name: Environmentally hazardous substance, solid, n.o.s.

 $(1\alpha,2\alpha,3\alpha,4\beta,5\alpha,6\beta)-1,2,3,4,5,6$ -Hexachlorocyclohexane)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kq for solids.

SECTION 15: Regulatory information

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

1α,2α,3α,4β,5α,6β)-1,2,3,4,5,6-CAS-No.Revision DateHexachlorocyclohexane319-86-81993-02-16

Supelco - 48495

Millipore Sigma

SECTION 16: Other information


Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.3 Revision Date: 04/17/2021 Print Date: 09/11/2021







SAFETY DATA SHEET

Version 6.3 Revision Date 09/14/2021 Print Date 09/14/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : Dieldrin

Product Number : 291218 Brand : Aldrich

Index-No. : 602-049-00-9 CAS-No. : 60-57-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 2), H300 Acute toxicity, Dermal (Category 1), H310

Carcinogenicity (Category 2), H351

Specific target organ toxicity - repeated exposure, Oral (Category 1), H372

Short-term (acute) aquatic hazard (Category 1), H400 Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram





Signal word	Danger
Hazard statement(s) H300 + H310 H351 H372	Fatal if swallowed or in contact with skin. Suspected of causing cancer. Causes damage to organs through prolonged or repeated exposure if swallowed.
H410	Very toxic to aquatic life with long lasting effects.
Precautionary statement(s) P201 P202	Obtain special instructions before use. Do not handle until all safety precautions have been read and understood.
P260 P262	Do not breathe dust/ fume/ gas/ mist/ vapors/ spray. Do not get in eyes, on skin, or on clothing.
P264	Wash skin thoroughly after handling.
P270 P273	Do not eat, drink or smoke when using this product. Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P302 + P350 + P310	IF ON SKIN: Gently wash with plenty of soap and water. Immediately call a POISON CENTER or doctor/ physician.
P308 + P313 P362 P391 P405 P501	IF exposed or concerned: Get medical advice/ attention. Take off contaminated clothing and wash before reuse. Collect spillage. Store locked up. Dispose of contents/ container to an approved waste disposal

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

plant.

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : 1,2,3,4,10,10-Hexachloro-1,4,4a,5,6,7,8,8a-octahydro-6,7-

epoxy-1,4:5,8-dimethanonaphthalene

Component	Classification	Concentration
Dieldrin		
	Acute Tox. 2; Acute Tox. 1; Carc. 2; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H300, H310, H351, H372, H400, H410	<= 100 %
	M-Factor - Aquatic Acute: 100	



M-Factor - Aquatic	
Chronic: 100	

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Consult a physician. Show this material safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available



SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. **Advice on safe handling**

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Advice on protection against fire and explosion

Provide appropriate exhaust ventilation at places where dust is formed.

Hygiene measures

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Keep container tightly closed in a dry and well-ventilated place.

Storage class

Storage class (TRGS 510): 6.1B: Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters



Component	CAS-No.	Value	Control	Basis	
D. 11.	60 55 4		parameters		
Dieldrin	60-57-1	TWA	0.1 mg/m3	USA. ACGIH Threshold Limit	
				Values (TLV)	
	Remarks	Confirmed	animal carcinog	en with unknown relevance to	
		humans	1 .		
		Danger of	Danger of cutaneous absorption		
		TWA	0.25 mg/m3	USA. NIOSH Recommended	
			J.	Exposure Limits	
		Potential Occupational Carcinogen			
		Potential for dermal absorption			
		TWA	0.25 mg/m3	USA. Occupational Exposure	
				Limits (OSHA) - Table Z-1	
				Limits for Air Contaminants	
		Skin designation			
		TWA	0.25 mg/m3	USA. OSHA - TABLE Z-1 Limits	
			J.	for Air Contaminants -	
				1910.1000	
		Skin notation		•	
		PEL	0.25 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)	
		Skin	1	120.)	

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail

sales@kcl.de, test method: EN374



If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the EC approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a)) <i>F</i>	Appearance	Form:	solid

b) Odor No data availablec) Odor Threshold No data availabled) pH No data available

e) Melting Melting point/range: 143 - 144 °C (289 - 291 °F) point/freezing point

f) Initial boiling point and boiling range

No data available

g) Flash point ()No data availableh) Evaporation rate No data availablei) Flammability (solid, No data available

gas)

j) Upper/lower No data available

flammability or explosive limits

k) Vapor pressure No data available

I) Vapor density No data availablem) Density No data availableRelative density No data available

n) Water solubility No data availableo) Partition coefficient: No data available

n-octanol/water



p) Autoignition No data available temperature

q) Decomposition No data available temperature

r) Viscosity No data availables) Explosive properties No data availablet) Oxidizing properties No data available

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 38.3 mg/kg Inhalation: No data available Dermal: No data available LD50 Dermal - 5 mg/kg No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity



This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification. Limited evidence of carcinogenicity in animal studies

IARC: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

Ingestion - Causes damage to organs through prolonged or repeated exposure. Aspiration hazard

No data available

11.2 Additional Information

RTECS: IO1750000

Discomfort, Headache, Nausea, Vomiting, Dizziness, Tremors, tonic convulsions, clonic spasms, Coma., respiratory failure, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Blood - Irregularities - Based on Human Evidence

Blood - Irregularities - Based on Human Evidence

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish mortality LC50 - Carassius auratus (goldfish) - 1.6 µg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates

Immobilization EC50 - Daphnia magna (Water flea) - $79.5 \mu g/l$ - 48

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

DOT (US)

UN number: 2811 Class: 6.1 Packing group: I Proper shipping name: Toxic solids, organic, n.o.s. (Dieldrin)

Reportable Quantity (RQ): 1 lbs

1) Marine pollutant: yesPoison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: I EMS-No: F-A, S-A

Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Dieldrin)

Marine pollutant : yes

IATA

UN number: 2811 Class: 6.1 Packing group: I Proper shipping name: Toxic solid, organic, n.o.s. (Dieldrin)

IATA Passenger: Not permitted for transport

SECTION 15: Regulatory information

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Aldrich - 291218

Millipore Sigma Dieldrin

CAS-No. 60-57-1 Revision Date 1993-02-16

SECTION 16: Other information


Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.3 Revision Date: 09/14/2021 Print Date: 09/14/2021







SAFETY DATA SHEET

Version 6.5 Revision Date 04/18/2021 Print Date 09/11/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : Endrin

Product Number : 32014

Brand : Sigma-Aldrich Index-No. : 602-051-00-X

CAS-No. : 72-20-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 1), H300 Acute toxicity, Dermal (Category 1), H310

Short-term (acute) aquatic hazard (Category 1), H400 Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram

Signal word Danger

Sigma-Aldrich - 32014

Hazard statement(s) H300 + H310Fatal if swallowed or in contact with skin. H410 Very toxic to aquatic life with long lasting effects. Precautionary statement(s) Do not get in eyes, on skin, or on clothing. Wash skin thoroughly after handling. P264 P270 Do not eat, drink or smoke when using this product. P273 Avoid release to the environment. P280 Wear protective gloves/ protective clothing. IF SWALLOWED: Immediately call a POISON CENTER/ doctor. P301 + P310 + P330 P302 + P350 + P310 IF ON SKIN: Gently wash with plenty of soap and water. Immediately call a POISON CENTER or doctor/ physician. Take off contaminated clothing and wash before reuse. P362

P391 Collect spillage. P405 Store locked up.

P501 Dispose of contents/ container to an approved waste disposal

plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Component	Classification	Concentration
Endrin		
	Acute Tox. 1; Aquatic Acute 1; Aquatic Chronic 1; H300, H310, H400, H410 M-Factor - Aquatic Acute: 100 - Aquatic Chronic: 100	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

First aiders need to protect themselves. Show this material safety data sheet to the doctor in attendance.

If inhaled

After inhalation: fresh air.

Sigma-Aldrich - 32014

Millipore SigMa

In case of skin contact

In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower. Call a physician immediately.

In case of eye contact

After eye contact: rinse out with plenty of water. Remove contact lenses.

If swallowed

If swallowed: give water to drink (two glasses at most). Seek medical advice immediately. In exceptional cases only, if medical care is not available within one hour, induce vomiting (only in persons who are wide awake and fully conscious), administer activated charcoal (20 - 40 g in a 10% slurry) and consult a doctor as quickly as possible.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Water Foam Carbon dioxide (CO2) Dry powder

Unsuitable extinguishing media

For this substance/mixture no limitations of extinguishing agents are given.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Hydrogen chloride gas

Combustible.

Development of hazardous combustion gases or vapours possible in the event of fire.

5.3 Advice for firefighters

Stay in danger area only with self-contained breathing apparatus. Prevent skin contact by keeping a safe distance or by wearing suitable protective clothing.

5.4 Further information

Suppress (knock down) gases/vapors/mists with a water spray jet. Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Advice for non-emergency personnel: Avoid generation and inhalation of dusts in all circumstances. Avoid substance contact. Ensure adequate ventilation. Evacuate the danger area, observe emergency procedures, consult an expert. For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.



6.3 Methods and materials for containment and cleaning up

Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up carefully. Dispose of properly. Clean up affected area. Avoid generation of dusts.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Tightly closed. Dry. Keep in a well-ventilated place. Keep locked up or in an area accessible only to qualified or authorized persons.

Storage class (TRGS 510): 6.1A: Combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Endrin	72-20-8	TWA	0.1 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Not classifi	able as a human	carcinogen
		Danger of o	cutaneous absor	ption
		TWA	0.1 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential fo	r dermal absorp	tion
		TWA	0.1 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin design	nation	
		TWA	0.1 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notati	on	
		PEL	0.1 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin	·	·



8.2 Exposure controls

Appropriate engineering controls

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU). Safety glasses

Skin protection

Handle with impervious gloves.

This recommendation applies only to the product stated in the safety data sheet, supplied by us and for the designated use. When dissolving in or mixing with other substances and under conditions deviating from those stated in EN374 please contact the supplier of CE-approved gloves (e.g. KCL GmbH, D-36124 Eichenzell, Internet: www.kcl.de).

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: KCL 741 Dermatril® L

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: KCL 741 Dermatril® L

Body Protection

protective clothing

Respiratory protection

required when dusts are generated.

Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection system.

Control of environmental exposure

Do not let product enter drains.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a) Appearance Form: solid

Color: colorless

b) Odor
c) Odor Threshold
d) pH
e) Melting
No data available
No data available
No data available

point/freezing point

f) Initial boiling point No data available

Sigma-Aldrich - 32014



and boiling range

g) Flash point ()No data available h) Evaporation rate No data available Flammability (solid, No data available i) gas)

Upper/lower

No data available

j) flammability or explosive limits

No data available k) Vapor pressure No data available I) Vapor density m) Relative density No data available

n) Water solubility insoluble

o) Partition coefficient: log Pow: 5.20 n-octanol/water

p) Autoignition temperature No data available

a) Decomposition temperature

226.0 °C (438.8 °F) -

Viscosity No data available r) No data available s) Explosive properties Oxidizing properties No data available

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

The following applies in general to flammable organic substances and mixtures: in correspondingly fine distribution, when whirled up a dust explosion potential may generally be assumed.

10.2 Chemical stability

The product is chemically stable under standard ambient conditions (room temperature) .

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

no information available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

In the event of fire: see section 5



SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 3.0 mg/kg

Inhalation: No data available

LD50 Dermal - Rat - 12.0 mg/kg

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

11.2 Additional Information

RTECS: IO1575000

Central nervous system -



SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - < 0.001 mg/l - 96.0

h

Toxicity to daphnia and other aquatic invertebrates

EC50 - Daphnia pulex (Water flea) - 0.02 mg/l - 48 h

Immobilization EC50 - Daphnia magna (Water flea) - 0.0042 mg/l -

48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Pimephales promelas (fathead minnow) - 56 d

- 0.63 mg/l(Endrin)

Bioconcentration factor (BCF): 13,000

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Waste material must be disposed of in accordance with the national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself. See www.retrologistik.com for processes regarding the return of chemicals and containers, or contact us there if you have further questions.

SECTION 14: Transport information

DOT (US)

UN number: 2811 Class: 6.1 Packing group: I Proper shipping name: Toxic solids, organic, n.o.s. (Endrin)

Reportable Quantity (RQ): 1 lbs Reportable Quantity (RQ): 1 lbs

1) Marine pollutant: yesPoison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: I EMS-No: F-A, S-A

Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Endrin)

Marine pollutant : yes

Sigma-Aldrich - 32014

IATA

UN number: 2811 Class: 6.1 Packing group: I Proper shipping name: Toxic solid, organic, n.o.s. (Endrin)

SECTION 15: Regulatory information

SARA 302 Components

Endrin CAS-No. Revision Date 72-20-8 2007-07-01

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard

Reportable Quantity D012 lbs

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

SECTION 16: Other information

Further information

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.5 Revision Date: 04/18/2021 Print Date: 09/11/2021





SAFETY DATA SHEET

Version 8.0 Revision Date 09/13/2021 Print Date 09/14/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : Heptachlor

Product Number : PS78
Brand : Supelco
Index-No. : 602-046-00-2
CAS-No. : 76-44-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301 Acute toxicity, Dermal (Category 3), H311 Carcinogenicity (Category 2), H351

Specific target organ toxicity - repeated exposure (Category 2), H373

Short-term (acute) aquatic hazard (Category 1), H400 Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram

Supelco - PS78



Signal word	Danger
Hazard statement(s) H301 + H311 H351 H373	Toxic if swallowed or in contact with skin. Suspected of causing cancer. May cause damage to organs through prolonged or repeated exposure.
H410	Very toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapors/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of water.Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms: 1,4,5,6,7,8,8-Heptachloro-3a,4,7,7a-tetrahydro-4,7-

methanoindene

Molecular weight : 373.32 g/mol CAS-No. : 76-44-8 EC-No. : 200-962-3 Index-No. : 602-046-00-2

Component	Classification	Concentration
Heptachlor		
	Acute Tox. 3; Carc. 2; STOT RE 2; Aquatic Acute 1; Aquatic Chronic 1; H301, H311, H351, H373, H400, H410 M-Factor - Aquatic Acute: 100 M-Factor - Aquatic	<= 100 %

Supelco - PS78 Page 2 of 10



Chronic: 100

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

First aiders need to protect themselves. Show this material safety data sheet to the doctor in attendance.

If inhaled

After inhalation: fresh air. Call in physician.

In case of skin contact

In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower. Call a physician immediately.

In case of eye contact

After eye contact: rinse out with plenty of water. Call in ophthalmologist. Remove contact lenses.

If swallowed

If swallowed: give water to drink (two glasses at most). Seek medical advice immediately. In exceptional cases only, if medical care is not available within one hour, induce vomiting (only in persons who are wide awake and fully conscious), administer activated charcoal (20 - 40 g in a 10% slurry) and consult a doctor as quickly as possible.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Water Foam Carbon dioxide (CO2) Dry powder

Unsuitable extinguishing media

For this substance/mixture no limitations of extinguishing agents are given.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Hydrogen chloride gas

Combustible.

Development of hazardous combustion gases or vapours possible in the event of fire.

5.3 Advice for firefighters

Stay in danger area only with self-contained breathing apparatus. Prevent skin contact by keeping a safe distance or by wearing suitable protective clothing.

Supelco - PS78

Page 3 of 10

A

5.4 Further information

Suppress (knock down) gases/vapors/mists with a water spray jet. Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Advice for non-emergency personnel: Avoid generation and inhalation of dusts in all circumstances. Avoid substance contact. Ensure adequate ventilation. Evacuate the danger area, observe emergency procedures, consult an expert. For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up carefully. Dispose of properly. Clean up affected area. Avoid generation of dusts.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on safe handling

Work under hood. Do not inhale substance/mixture.

Hygiene measures

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Tightly closed. Dry. Keep in a well-ventilated place. Keep locked up or in an area accessible only to qualified or authorized persons.

Storage class

Storage class (TRGS 510): 6.1A: Combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Supelco - PS78

Page 4 of 10

Component	CAS-No.	Value	Control parameters	Basis
Heptachlor	76-44-8	TWA	0.5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	Skin desigr	nation	
		TWA	0.5 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen Potential for dermal absorption		
		PEL	0.05 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin	_	

8.2 Exposure controls

Appropriate engineering controls

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU). Safety glasses

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail

sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the EC approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

protective clothing

Supelco - PS78



Respiratory protection

required when dusts are generated.

Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection system.

Control of environmental exposure

Do not let product enter drains.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a) Appearance Form: solid

b) Odorc) Odor Thresholdd) pHNo data availableNo data available

e) Melting Melting point: 95 - 96 °C (203 - 205 °F) point/freezing point

f) Initial boiling point 145 °C 293 °F at 199.99 hPa and boiling range

g) Flash point ()Not applicable
h) Evaporation rate No data available
i) Flammability (solid, No data available

) Flammability (solid, gas)

flammability or

Upper/lower No data available

explosive limits
k) Vapor pressure No data available
l) Vapor density No data available

m) Density 1.57 g/cm3 at 9 °C (48 °F)

Relative density No data available

n) Water solubility No data available

o) Partition coefficient: No data available

n-octanol/water

No data available

p) Autoignition No of temperature

No data available

q) Decomposition temperature

r) Viscosity No data availables) Explosive properties No data available

c) Oxidizing properties No data available

9.2 Other safety information

No data available

Supelco - PS78



SECTION 10: Stability and reactivity

10.1 Reactivity

The following applies in general to flammable organic substances and mixtures: in correspondingly fine distribution, when whirled up a dust explosion potential may generally be assumed.

10.2 Chemical stability

The product is chemically stable under standard ambient conditions (room temperature).

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

no information available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Mouse - 68.0 mg/kg

Remarks: (RTECS)

Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

Inhalation: No data available

LD50 Dermal - Rabbit - 500.0 mg/kg

Remarks: (RTECS)

Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Suspected of causing cancer.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Heptachlor)

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

Supelco - PS78 Page 7 of 10



on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

May cause damage to organs through prolonged or repeated exposure. Remarks: Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

Aspiration hazard

No data available

11.2 Additional Information

RTECS: PC0700000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 0.007 mg/l - 96.0 h

Remarks: (ECOTOX Database)

Toxicity to daphnia and other aquatic invertebrates

LC50 - Daphnia magna (Water flea) - 0.078 mg/l - 48 h

Remarks: (ECOTOX Database)

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Pimephales promelas (fathead minnow) - 276 d

- 0.00043 mg/l(Heptachlor)

Bioconcentration factor (BCF): 23,814

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available



SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Waste material must be disposed of in accordance with the national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself. See www.retrologistik.com for processes regarding the return of chemicals and containers, or contact us there if you have further questions.

SECTION 14: Transport information

DOT (US)

UN number: 2811 Class: 6.1 Packing group: II Proper shipping name: Toxic solids, organic, n.o.s. (Heptachlor)

Reportable Quantity (RQ): 1 lbs Reportable Quantity (RQ): 1 lbs

1) Marine pollutant: yesPoison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: II EMS-No: F-A, S-A

Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Heptachlor)

Marine pollutant : yes

IATA

UN number: 2811 Class: 6.1 Packing group: II Proper shipping name: Toxic solid, organic, n.o.s. (Heptachlor)

SECTION 15: Regulatory information

SARA 302 Components

This material does not contain any components with a section 302 EHS TPQ.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

CAS-No. Revision Date Heptachlor 76-44-8 2007-03-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Reportable Quantity D031 lbs

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Supelco - PS78

A

SECTION 16: Other information

Further information

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 8.0 Revision Date: 09/13/2021 Print Date: 09/14/2021

Supelco - PS78



Page 10 of 10



SAFETY DATA SHEET

Version 8.0 Revision Date 09/13/2021 Print Date 09/14/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : Heptachlor

Product Number : PS78
Brand : Supelco
Index-No. : 602-046-00-2
CAS-No. : 76-44-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

Telephone : +1 314 771-5765 Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301 Acute toxicity, Dermal (Category 3), H311 Carcinogenicity (Category 2), H351

Specific target organ toxicity - repeated exposure (Category 2), H373

Short-term (acute) aquatic hazard (Category 1), H400 Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram

Supelco - PS78



Signal word	Danger
Hazard statement(s) H301 + H311 H351 H373	Toxic if swallowed or in contact with skin. Suspected of causing cancer. May cause damage to organs through prolonged or repeated exposure.
H410	Very toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapors/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of water.Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms: 1,4,5,6,7,8,8-Heptachloro-3a,4,7,7a-tetrahydro-4,7-

methanoindene

Molecular weight : 373.32 g/mol CAS-No. : 76-44-8 EC-No. : 200-962-3 Index-No. : 602-046-00-2

Component	Classification	Concentration
Heptachlor		
	Acute Tox. 3; Carc. 2; STOT RE 2; Aquatic Acute 1; Aquatic Chronic 1; H301, H311, H351, H373, H400, H410 M-Factor - Aquatic Acute: 100 M-Factor - Aquatic	<= 100 %

Supelco - PS78 Page 2 of 10



Chronic: 100

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

First aiders need to protect themselves. Show this material safety data sheet to the doctor in attendance.

If inhaled

After inhalation: fresh air. Call in physician.

In case of skin contact

In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower. Call a physician immediately.

In case of eye contact

After eye contact: rinse out with plenty of water. Call in ophthalmologist. Remove contact lenses.

If swallowed

If swallowed: give water to drink (two glasses at most). Seek medical advice immediately. In exceptional cases only, if medical care is not available within one hour, induce vomiting (only in persons who are wide awake and fully conscious), administer activated charcoal (20 - 40 g in a 10% slurry) and consult a doctor as quickly as possible.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Water Foam Carbon dioxide (CO2) Dry powder

Unsuitable extinguishing media

For this substance/mixture no limitations of extinguishing agents are given.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Hydrogen chloride gas

Combustible.

Development of hazardous combustion gases or vapours possible in the event of fire.

5.3 Advice for firefighters

Stay in danger area only with self-contained breathing apparatus. Prevent skin contact by keeping a safe distance or by wearing suitable protective clothing.

Supelco - PS78

Page 3 of 10

A

5.4 Further information

Suppress (knock down) gases/vapors/mists with a water spray jet. Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Advice for non-emergency personnel: Avoid generation and inhalation of dusts in all circumstances. Avoid substance contact. Ensure adequate ventilation. Evacuate the danger area, observe emergency procedures, consult an expert. For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up carefully. Dispose of properly. Clean up affected area. Avoid generation of dusts.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on safe handling

Work under hood. Do not inhale substance/mixture.

Hygiene measures

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Tightly closed. Dry. Keep in a well-ventilated place. Keep locked up or in an area accessible only to qualified or authorized persons.

Storage class

Storage class (TRGS 510): 6.1A: Combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Supelco - PS78

Page 4 of 10

Component	CAS-No.	Value	Control parameters	Basis
Heptachlor	76-44-8	TWA	0.5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	Skin desigr	nation	
		TWA	0.5 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen Potential for dermal absorption		
		PEL	0.05 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin	_	

8.2 Exposure controls

Appropriate engineering controls

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU). Safety glasses

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail

sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the EC approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

protective clothing

Supelco - PS78



Respiratory protection

required when dusts are generated.

Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection system.

Control of environmental exposure

Do not let product enter drains.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a) Appearance Form: solid

b) Odorc) Odor Thresholdd) pHNo data availableNo data available

e) Melting Melting point: 95 - 96 °C (203 - 205 °F) point/freezing point

f) Initial boiling point 145 °C 293 °F at 199.99 hPa and boiling range

g) Flash point ()Not applicable
h) Evaporation rate No data available
i) Flammability (solid, No data available

) Flammability (solid, gas)

flammability or

Upper/lower No data available

explosive limits
k) Vapor pressure No data available
l) Vapor density No data available

m) Density 1.57 g/cm3 at 9 °C (48 °F)

Relative density No data available

n) Water solubility No data available

o) Partition coefficient: No data available

n-octanol/water

No data available

p) Autoignition No of temperature

No data available

q) Decomposition temperature

r) Viscosity No data availables) Explosive properties No data available

c) Oxidizing properties No data available

9.2 Other safety information

No data available

Supelco - PS78



SECTION 10: Stability and reactivity

10.1 Reactivity

The following applies in general to flammable organic substances and mixtures: in correspondingly fine distribution, when whirled up a dust explosion potential may generally be assumed.

10.2 Chemical stability

The product is chemically stable under standard ambient conditions (room temperature).

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

no information available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Mouse - 68.0 mg/kg

Remarks: (RTECS)

Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

Inhalation: No data available

LD50 Dermal - Rabbit - 500.0 mg/kg

Remarks: (RTECS)

Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Suspected of causing cancer.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Heptachlor)

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

Supelco - PS78 Page 7 of 10



on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

May cause damage to organs through prolonged or repeated exposure. Remarks: Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

Aspiration hazard

No data available

11.2 Additional Information

RTECS: PC0700000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 0.007 mg/l - 96.0 h

Remarks: (ECOTOX Database)

Toxicity to daphnia and other aquatic invertebrates

LC50 - Daphnia magna (Water flea) - 0.078 mg/l - 48 h

Remarks: (ECOTOX Database)

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Pimephales promelas (fathead minnow) - 276 d

- 0.00043 mg/l(Heptachlor)

Bioconcentration factor (BCF): 23,814

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available



SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Waste material must be disposed of in accordance with the national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself. See www.retrologistik.com for processes regarding the return of chemicals and containers, or contact us there if you have further questions.

SECTION 14: Transport information

DOT (US)

UN number: 2811 Class: 6.1 Packing group: II Proper shipping name: Toxic solids, organic, n.o.s. (Heptachlor)

Reportable Quantity (RQ): 1 lbs Reportable Quantity (RQ): 1 lbs

1) Marine pollutant: yesPoison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: II EMS-No: F-A, S-A

Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Heptachlor)

Marine pollutant : yes

IATA

UN number: 2811 Class: 6.1 Packing group: II Proper shipping name: Toxic solid, organic, n.o.s. (Heptachlor)

SECTION 15: Regulatory information

SARA 302 Components

This material does not contain any components with a section 302 EHS TPQ.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

CAS-No. Revision Date Heptachlor 76-44-8 2007-03-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Reportable Quantity D031 lbs

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Supelco - PS78

A

SECTION 16: Other information

Further information

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 8.0 Revision Date: 09/13/2021 Print Date: 09/14/2021

Supelco - PS78



Page 10 of 10



SAFETY DATA SHEET

Version 6.4 Revision Date 09/09/2021 Print Date 09/11/2021

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : Lindane

Product Number : 233390 Brand : Aldrich

Index-No. : 602-043-00-6 CAS-No. : 58-89-9

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.

3050 SPRUCE ST ST. LOUIS MO 63103 UNITED STATES

: +1 314 771-5765 : +1 800 325-5052

..4 Emergency telephone

Telephone

Fax

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-

527-3887 CHEMTREC (International) 24

Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301

Acute toxicity, Inhalation (Category 4), H332

Acute toxicity, Dermal (Category 4), H312

Carcinogenicity (Category 1A), H350

Effects on or via lactation, H362

Specific target organ toxicity - repeated exposure (Category 2), H373

Short-term (acute) aquatic hazard (Category 1), H400 Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Aldrich - 233390

√illi**P**OR**e**

Pictogram



Signal word Danger

Hazard statement(s)

H301 Toxic if swallowed.

H312 + H332 Harmful in contact with skin or if inhaled.

H350 May cause cancer.

H362 May cause harm to breast-fed children.

H373 May cause damage to organs through prolonged or repeated

exposure.

H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202 Do not handle until all safety precautions have been read and

understood.

P260 Do not breathe dust/ fume/ gas/ mist/ vapors/ spray.
P263 Avoid contact during pregnancy/ while nursing.

P264 Wash skin thoroughly after handling.

P270 Do not eat, drink or smoke when using this product.
P271 Use only outdoors or in a well-ventilated area.

P273 Avoid release to the environment.

P280 Wear protective gloves/ protective clothing/ eye protection/ face

protection.

P301 + P310 + P330 IF SWALLOWED: Immediately call a POISON CENTER/ doctor.

Rinse mouth.

P302 + P352 + P312 IF ON SKIN: Wash with plenty of water.Call a POISON CENTER/

doctor if you feel unwell.

P304 + P340 + P312 IF INHALED: Remove person to fresh air and keep comfortable

for breathing. Call a POISON CENTER/ doctor if you feel unwell.

P308 + P313 IF exposed or concerned: Get medical advice/ attention.

P363 Wash contaminated clothing before reuse.

P391 Collect spillage. P405 Store locked up.

P501 Dispose of contents/ container to an approved waste disposal

plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none


SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms : 1α,2α,3β,4α,5α,6β-Hexachlorocyclohexane

v-BHC

Component Classification Concentration



Gammaxene		
	Acute Tox. 3; Acute Tox. 4; Carc. 1A; Lact. ; STOT	<= 100 %
	RE 2; Aquatic Acute 1;	
	Aquatic Chronic 1; H301,	
	H332, H312, H350, H362,	
	H373, H400, H410	
	M-Factor - Aquatic Acute:	
	1 - Aquatic Chronic: 1	

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Show this material safety data sheet to the doctor in attendance.

If inhaled

After inhalation: fresh air. Call in physician.

In case of skin contact

In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower. Consult a physician.

In case of eye contact

After eye contact: rinse out with plenty of water. Call in ophthalmologist. Remove contact lenses.

If swallowed

If swallowed: give water to drink (two glasses at most). Seek medical advice immediately. In exceptional cases only, if medical care is not available within one hour, induce vomiting (only in persons who are wide awake and fully conscious), administer activated charcoal (20 - 40 g in a 10% slurry) and consult a doctor as quickly as possible.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Water Foam Carbon dioxide (CO2) Dry powder

Unsuitable extinguishing media

For this substance/mixture no limitations of extinguishing agents are given.

Millipore SiGMa

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Hydrogen chloride gas

Combustible.

Development of hazardous combustion gases or vapours possible in the event of fire.

5.3 Advice for firefighters

Stay in danger area only with self-contained breathing apparatus. Prevent skin contact by keeping a safe distance or by wearing suitable protective clothing.

5.4 Further information

Suppress (knock down) gases/vapors/mists with a water spray jet. Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Advice for non-emergency personnel: Avoid inhalation of dusts. Avoid substance contact. Ensure adequate ventilation. Evacuate the danger area, observe emergency procedures, consult an expert.

For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up carefully. Dispose of properly. Clean up affected area. Avoid generation of dusts.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on safe handling

Work under hood. Do not inhale substance/mixture.

Hygiene measures

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Tightly closed. Dry. Keep in a well-ventilated place. Keep locked up or in an area accessible only to qualified or authorized persons.

Storage class

Storage class (TRGS 510): 6.1C: Combustible, acute toxic Cat.3 / toxic compounds or compounds which causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated



SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Gammaxene	58-89-9	TWA	0.5 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Confirmed animal carcinogen with unknown relevance to humans		
		Danger of o	cutaneous absor	ption
		TWA	0.5 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	0.5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin design	nation	
		PEL	0.5 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin	•	

8.2 Exposure controls

Appropriate engineering controls

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU). Safety glasses

Skin protection

Handle with impervious gloves.

This recommendation applies only to the product stated in the safety data sheet, supplied by us and for the designated use. When dissolving in or mixing with other substances and under conditions deviating from those stated in EN374 please contact the supplier of CE-approved gloves (e.g. KCL GmbH, D-36124 Eichenzell, Internet: www.kcl.de).

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: KCL 741 Dermatril® L

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min



Material tested: KCL 741 Dermatril® L

Body Protection

protective clothing

Respiratory protection

required when dusts are generated.

Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection system.

Control of environmental exposure

Do not let product enter drains.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a) Appearance Form: solid

b) Odor No data available c) Odor Threshold No data available d) pH No data available

e) Melting Melting point/range: 113 - 115 °C (235 - 239 °F) - lit.

Pow: 3.5 at 22 °C (72 °F) - Bioaccumulation is not expected.

point/freezing point

Initial boiling point 323.4 °C 614.1 °F at 1,013.25 hPa and boiling range

g) Flash point No data available h) Evaporation rate No data available No data available

Flammability (solid,

gas)

No data available j) Upper/lower

flammability or explosive limits

k) Vapor pressure No data available Vapor density No data available I)

m) Density 1.85 g/cm3

> Relative density No data available

8.35 g/l at 25 °C (77 °F) n) Water solubility

o) Partition coefficient: n-octanol/water

No data available p) Autoignition

temperature

No data available q) Decomposition

temperature

No data available Viscosity r)

s) Explosive properties No data available

Oxidizing properties none t)



9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

The following applies in general to flammable organic substances and mixtures: in correspondingly fine distribution, when whirled up a dust explosion potential may generally be assumed.

10.2 Chemical stability

The product is chemically stable under standard ambient conditions (room temperature).

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

no information available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 88.0 mg/kg

Remarks: (IUCLID)

LC50 Inhalation - Rat - 4 h - 1,560 mg/m3

Dermal: No data available

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation (OECD Test Guideline 404)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation Remarks: (IUCLID)

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 1 - Group 1: Carcinogenic to humans (Gammaxene)

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is

identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is

on OSHA's list of regulated carcinogens.

Reproductive toxicity

Studies indicating a hazard to babies during the lactation period

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

May cause damage to organs through prolonged or repeated exposure. Remarks: Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

Aspiration hazard

No data available

11.2 Additional Information

RTECS: GV4900000

Neurotoxic effects., Cyanosis, Headache, Nausea, Incoordination., Tremors, Vomiting,

Dizziness, Seizures., Unconsciousness

To the best of our knowledge, the chemical, physical, and toxicological properties have not

been thoroughly investigated.

Reproductive system. - Irregularities - Based on Human Evidence

Reproductive system. - Irregularities - Based on Human Evidence

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish LC50 - Cyprinus carpio (Carp) - 0.2 mg/l - 96.0 h

Remarks: (ECOTOX Database)

Toxicity to daphnia and other aquatic

and other aqua invertebrates

EC50 - Daphnia magna (Water flea) - 0.80 - 6.50 mg/l - 48 h

Remarks: (ECOTOX Database)

LOEC - Daphnia - 0.021 mg/l - 7 d Remarks: (ECOTOX Database)

Toxicity to algae EC50 - Algae - 4.00 mg/l - 72 h

Remarks: (ECOTOX Database)

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Pimephales promelas (fathead minnow) - 304 d

- 0.0091 mg/l(Gammaxene)

Bioconcentration factor (BCF): 674

12.4 Mobility in soil

No data available

Aldrich - 233390

Page 8 of 10

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Waste material must be disposed of in accordance with the national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself. See www.retrologistik.com for processes regarding the return of chemicals and containers, or contact us there if you have further questions.

SECTION 14: Transport information

DOT (US)

UN number: 2811 Class: 6.1 Packing group: III Proper shipping name: Toxic solids, organic, n.o.s. (Gammaxene)

Reportable Quantity (RQ): 1 lbs Reportable Quantity (RQ): 1 lbs

1) Marine pollutant: yesPoison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A

Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Gammaxene)

Marine pollutant : yes

IATA

UN number: 2811 Class: 6.1 Packing group: III Proper shipping name: Toxic solid, organic, n.o.s. (Gammaxene)

SECTION 15: Regulatory information

SARA 302 Components

Gammaxene CAS-No. Revision Date 58-89-9 2007-07-01

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

Gammaxene CAS-No. Revision Date 2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Aldrich - 233390

Millipore Sigma **Reportable Quantity** D013 lbs

Massachusetts Right To Know Components

CAS-No. Revision Date Gammaxene 58-89-9 2007-07-01

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

Gammaxene CAS-No. Revision Date

58-89-9 2007-07-01

New Jersey Right To Know Components

Gammaxene CAS-No. Revision Date

58-89-9 2007-07-01

SECTION 16: Other information

Further information

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.4 Revision Date: 09/09/2021 Print Date: 09/11/2021





SAFETY DATA SHEET: PERCHLOROETHYLENE

IN CASE OF TRANSPORTATION EMERGENCY CONTACT:

CHEMTREC:(800) 424-9300

ALL OTHER INQUIRIES:

(770) 904-7042 // www.ciscochem.com 266 Rue Cezzan Lavonia, GA 30553





1. IDENTIFICATION

SUBSTANCE: TETRACHLOROETHYLENE

TRADE NAMES/SYNONYMS:

PERCHLOROETHYLENE; 1,1,2,2-TETRACHLOROETHYLENE; ETHYLENE TETRACHLORIDE; PERC;

TETRACHLORETHYLENE; PERCHLORETHYLENE; TETRACHLOROETHENE

CHEMICAL FAMILY: halogenated, aliphatic

2. HAZARDS IDENTIFICATION

NFPA RATINGS (SCALE 0-4): HEALTH=3 FIRE=0 REACTIVITY=0

EMERGENCY OVERVIEW:

COLOR: colorless

PHYSICAL FORM: volatile liquid ODOR: faint odor, sweet odor

MAJOR HEALTH HAZARDS: respiratory tract irritation, skin irritation, eye irritation, central nervous system depression, cancer

hazard (in humans)

POTENTIAL HEALTH EFFECTS:

INHALATION:

SHORT TERM EXPOSURE: irritation, nausea, vomiting, chest pain, difficulty breathing, irregular

heartbeat, headache, drowsiness, dizziness, disorientation, mood swings, loss of coordination, blurred vision,

lung congestion, kidney damage, liver damage

LONG TERM EXPOSURE: irritation, nausea, stomach pain, loss of appetite, headache, drowsiness, dizziness, disorientation, sleep disturbances, pain in extremities, loss of coordination, blurred vision, hormonal disorders, internal bleeding, heart damage, liver damage, birth defects, brain damage, tumors, cancer

SKIN CONTACT:

SHORT TERM EXPOSURE: irritation (possibly severe)

LONG TERM EXPOSURE: irritation

EYE CONTACT:

SHORT TERM EXPOSURE: irritation LONG TERM EXPOSURE: irritation

INGESTION:

SHORT TERM EXPOSURE: same as effects reported in short term inhalation LONG TERM EXPOSURE: same as effects reported in long term inhalation

3. COMPOSITION

COMPONENT: TETRACHLOROETHYLENE

CAS NUMBER: 127-18-4 PERCENTAGE: 100.0

SDS: PERCHLOROETHYLENE Page: 1



Hazardous: YES

4. FIRST AID MEASURES

Inhalation:

Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Call a physician.

Ingestion:

Aspiration hazard. If swallowed, DO NOT INDUCE VOMITING. Give large quantities of water. Never give anything by mouth to an unconscious person. Get medical attention immediately.

Skin Contact

Wash skin with soap or mild detergent and water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse. Call a physician.

Eye Contact:

Immediately flush eyes with plenty of water for at least 15 minutes, lifting lower and upper eyelids occasionally. Get medical attention immediately.

Note to Physician:

Do not administer adrenaline or epinephrine to a victim of chlorinated solvent poisoning.

5. FIRE FIGHTING MEASURES

FIRE AND EXPLOSION HAZARDS: Negligible fire hazard.

EXTINGUISHING MEDIA: carbon dioxide, regular dry chemical Large fires: Use regular foam or flood with fine water spray.

FIRE FIGHTING: Cool containers with water spray until well after the fire is out. Stay away from the ends of tanks. For tank, rail car or tank truck, evacuation radius: 800 meters (1/2 mile).

FLASH POINT: No data available.

Special Information:

In the event of a fire, wear full protective clothing and NIOSH-approved self-contained breathing apparatus with full facepiece operated in the pressure demand or other positive pressure mode

6. ACCIDENTAL RELEASE MEASURES

SOIL RELEASE:

Dig holding area such as lagoon, pond or pit for containment. Dike for later disposal. Absorb with sand or other non-combustible material.

WATER RELEASE:

Absorb with activated carbon. Remove trapped material with suction hoses. Subject to California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65). Keep out of water supplies and sewers.

OCCUPATIONAL RELEASE:

Avoid heat, flames, sparks and other sources of ignition. Stop leak if possible without personal risk. Small liquid spills: Absorb with sand or other non-combustible material. Large spills: Dike for later disposal. Remove sources of ignition. Keep unnecessary people away, isolate hazard area and deny entry. Notify Local Emergency Planning Committee and State Emergency Response Commission for release greater than or equal to RQ (U.S. SARA Section 304). If release occurs in the U.S. and is reportable under CERCLA Section 103, notify the National Response Center at (800)424-8802 (USA) or (202)426-2675 (USA).

7. HANDLING AND STORAGE

Store in a cool, dry, ventilated area away from sources of heat or ignition. Isolate from flammable materials. Protect from direct sunlight. Wear special protective equipment (Sec. 8) for maintenance break-in or where exposures may exceed established exposure levels. Wash hands, face, forearms and neck when exiting restricted areas. Shower, dispose of outer clothing, change to clean garments at the end of the day. Avoid cross-contamination of street clothes. Wash hands before eating and do not eat, drink, or

Page: 2



smoke in workplace. Containers of this material may be hazardous when empty since they retain product residues (vapors, liquid); observe all warnings and precautions listed for the product.

8. EXPOSURE CONTROLS AND PERSONAL PROECTION

Airborne Exposure Limits:

-OSHA Permissible Exposure Limit (PEL): 100 ppm (TWA), 200 ppm (ceiling),

300 ppm/5min/3-hour (max)

-ACGIH Threshold Limit Value (TLV):

25 ppm (TWA), 100 ppm (STEL); listed as A3, animal carcinogen

Ventilation System:

A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits. Local exhaust ventilation is generally preferred because it can control the emissions of the contaminant at its source, preventing dispersion of it into the general work area. Please refer to the ACGIH document, Industrial Ventilation, A Manual of Recommended Practices, most recent edition, for details.

Personal Respirators (NIOSH Approved):

If the exposure limit is exceeded, wear a supplied air, full-facepiece respirator, airlined hood, or full-facepiece self-contained breathing apparatus.

Skin Protection:

Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Eye Protection:

Use chemical safety goggles and/or full face shield where dusting or splashing of solutions is possible. Maintain eye wash fountain and quick-drench facilities in work area.

CLOTHING: Wear appropriate chemical resistant clothing. GLOVES: Wear appropriate chemical resistant gloves.

RESPIRATOR: The following respirators and maximum use concentrations are drawn from NIOSH and/or OSHA.

At any detectable concentration -

Any self-contained breathing apparatus that has a full facepiece and is operated in a pressure-demand or other positive-pressure mode.

Any supplied-air respirator with a full facepiece that is operated in a pressure-demand or other positive- pressure mode in combination with an auxiliary self-contained breathing apparatus operated in pressure- demand or other positive-pressure mode.

Escape -

Any air-purifying full-facepiece respirator (gas mask) with a chin-style, front-mounted or back-mounted organic vapor canister. Any appropriate escape-type, self-contained breathing apparatus.

For Unknown Concentrations or Immediately Dangerous to Life or Health -

Any supplied-air respirator with a full facepiece that is operated in a pressure-demand or other positive- pressure mode in combination with an auxiliary self-contained breathing apparatus operated in pressure- demand or other positive-pressure mode. Any self-contained breathing apparatus that has a full facepiece and is operated in a pressure-demand or other positive-pressure mode.

9. PHYSICAL AND CHEMICAL PROPERTIES

PHYSICAL STATE: liquid APPEARANCE: clear COLOR: colorless

PHYSICAL FORM: volatile liquid ODOR: faint odor, sweet odor MOLECULAR WEIGHT: 165.83 MOLECULAR FORMULA: C12-C-C-C12

BOILING POINT: 250 F (121 C) FREEZING POINT: -2 F (-19 C) VAPOR PRESSURE: 14 mmHg @ 20 C

SDS: PERCHLOROETHYLENE Page: 3



VAPOR DENSITY (air=1): 5.83

SPECIFIC GRAVITY (water=1): 1.6227

WATER SOLUBILITY: 0.015%

PH: Not available

VOLATILITY: Not available ODOR THRESHOLD: 50 ppm

EVAPORATION RATE: 2.8 (butyl acetate=1)

COEFFICIENT OF WATER/OIL DISTRIBUTION: Not available

SOLVENT SOLUBILITY:

Soluble: alcohol, ether, benzene, chloroform, oils

10. STABILITY AND REACTIVITY

Stability

Stable under ordinary conditions of use and storage. Slowly decomposed by light. Deteriorates rapidly in warm, moist climates.

Hazardous Decomposition Products:

Carbon dioxide and carbon monoxide may form when heated to decomposition. Hydrogen chloride gas and phosgene gas may be formed upon heating. Decomposes with moisture to yield trichloroacetic acid and hydrochloric acid.

Hazardous Polymerization:

Will not occur.

Incompatibilities:

Strong acids, strong oxidizers, strong alkalis, especially NaOH, KOH; finely divided metals, especially zinc, barium, lithium. Slowly corrodes aluminum, iron and zinc.

Conditions to Avoid:

Moisture, light, heat and incompatibles.

11. TOXICOLOGICAL INFORMATION

TETRACHLOROETHYLENE:

IRRITATION DATA: 810 mg/24 hour(s) skin-rabbit severe; 500 mg/24 hour(s) skin-rabbit mild; 162 mg eyes-rabbit mild; 500 mg/24 hour(s) eyes-rabbit mild

TOXICITY DATA: 4100 ppm/6 hour(s) inhalation-rat LC50; >10000 mg/kg skin-rabbit LD50 (Dow); 2629 mg/kg oral-rat LD50

CARCINOGEN STATUS: NTP: Anticipated Human Carcinogen; IARC: Human Limited Evidence, Animal Sufficient Evidence, Group 2A; ACGIH: A3 -Confirmed Animal Carcinogen; EC: Category 2

LOCAL EFFECTS:

Irritant: inhalation, skin, eye

ACUTE TOXICITY LEVEL: Moderately Toxic: ingestion Slightly Toxic: inhalation

TARGET ORGANS: central nervous system

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: eye disorders, heart or cardiovascular disorders, kidney disorders, liver disorders, nervous system disorders, skin disorders and allergies

TUMORIGENIC DATA: Available.

MUTAGENIC DATA: Available.

REPRODUCTIVE EFFECTS DATA: Available.

ADDITIONAL DATA: May be excreted in breast milk. Alcohol may enhance the toxic effects. Stimulants such as epinephrine may induce ventricular fibrillation.



12. ECOLOGICAL INFORMATION

ECOTOXICITY DATA:

FISH TOXICITY: 8430 ug/L 96 hour(s) LC50 (Mortality) Flagfish (Jordanella floridae)

INVERTEBRATE TOXICITY: 7500 ug/L 48 hour(s) EC50 (Immobilization) Water flea (Daphnia magna)

ALGAL TOXICITY: 509000 ug/L 96 hour(s) EC50 (Photosynthesis) Diatom (Skeletonema costatum)

FATE AND TRANSPORT:

BIOCONCENTRATION: 49 ug/L 1-21 hour(s) BCF (Residue) Bluegill (Lepomis macrochirus) 3.43 ug/L

Environmental Fate:

When released into the soil, this material is expected to quickly evaporate. When released into the soil, this material may leach into groundwater. When released into the soil, this material may biodegrade to a moderate extent. When released to water, this material is expected to quickly evaporate. When released into water, this material is not expected to biodegrade. This material is not expected to significantly bioaccumulate. When released into the air, this material may be moderately degraded by reaction with photochemically produced hydroxyl radicals.

Environmental Toxicity:

The LC50/96-hour values for fish are between 1 and 10 mg/l. The LC50/96-hour values for fish are between 10 and 100 mg/l. This material is expected to be toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

Whatever cannot be saved for recovery or recycling should be handled as hazardous waste and sent to a RCRA approved incinerator or disposed in a RCRA approved waste facility. Processing, use or contamination of this product may change the waste management options. State and local disposal regulations may differ from federal disposal regulations. Dispose of container and unused contents in accordance with federal, state and local requirements.

14. TRANSPORT INFORMATION

Domestic (Land, D.O.T.)

Proper Shipping Name: TETRACHLOROETHYLENE Hazard Class: 6.1

UN/NA: UN1897 Packing Group: III

Information reported for product/size: 20L

International (Water, I.M.O.)

Proper Shipping Name: TETRACHLOROETHYLENE Hazard Class: 6.1

UN/NA: UN1897 Packing Group: III

Information reported for product/size: 20L

Proper shipping paperwork:

UN 1897, Tetrachoroethylene, 6.1, PG III

Marine Pollutant

15. REGULATORY INFORMATION

U.S. REGULATIONS:

CERCLA SECTIONS 102a/103 HAZARDOUS SUBSTANCES (40 CFR 302.4): TETRACHLOROETHYLENE

(PERCHLOROETHYLENE): 100 LBS RQ

SARA TITLE III SECTION 302 EXTREMELY HAZARDOUS SUBSTANCES



(40 CFR 355 Subpart B): Not regulated.

SARA TITLE III SECTION 304 EXTREMELY HAZARDOUS SUBSTANCES (40 CFR 355 Subpart C): Not regulated.

SARA TITLE III SARA SECTIONS 311/312 HAZARDOUS CATEGORIES (40 CFR 370 Subparts B and C):

ACUTE: Yes CHRONIC: Yes FIRE: No REACTIVE: No

SUDDEN RELEASE: No

SARA TITLE III SECTION 313 (40 CFR 372.65): TETRACHLOROETHYLENE (PERCHLOROETHYLENE)

OSHA PROCESS SAFETY (29 CFR 1910.119): Not regulated.

STATE REGULATIONS: California Proposition 65:

Known to the state of California to cause the following: TETRACHLOROETHYLENE (PERCHLOROETHYLENE) Cancer (Apr 01, 1988)

CANADIAN REGULATIONS: WHMIS CLASSIFICATION: D2

NATIONAL INVENTORY STATUS:

U.S. INVENTORY (TSCA): Listed on inventory.

TSCA 12(b) EXPORT NOTIFICATION: Not listed. CANADA INVENTORY (DSL/NDSL): Not determined.

16. OTHER INFORMATION

NFPA Ratings: Health: 2 Flammability: 0 Reactivity: 0

Label Hazard Warning:

WARNING! HARMFUL IF SWALLOWED, INHALED OR ABSORBED THROUGH SKIN. CAUSES IRRITATION TO SKIN, EYES AND RESPIRATORY TRACT. AFFECTS CENTRAL NERVOUS SYSTEM, LIVER AND KIDNEYS. SUSPECT CANCER HAZARD. MAY CAUSE CANCER. Risk of cancer depends on level and duration of exposure.

Label Precautions:

Do not get in eyes, on skin, or on clothing.

Do not breathe vapor or mist.

Keep container closed.

Use only with adequate ventilation.

Wash thoroughly after handling.

Label First Aid:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. If swallowed, DO NOT INDUCE VOMITING. Give large quantities of water. Never give anything by mouth to an unconscious person. In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse. In all cases call a physician.

Product Use:

Laboratory Reagent.

CISCO provides the information contained herein in good faith but makes no

representation as to its comprehensiveness or accuracy. This document is intended only as a guide to the appropriate precautionary handling of the material by a properly trained person using this product.

Individuals receiving the information must exercise their independent judgment in determining its appropriateness for a particular purpose. CISCO MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT TO WHICH THE INFORMATION REFERS.



ACCORDINGLY, CISCO WILL NOT BE RESPONSIBLE FOR DAMAGES RESULTING FROM USE OF OR RELIANCE UPON THIS INFORMATION.

Date Created: 5/18/2015 Date Updated: 6/11/2015





SAFETY DATA SHEET

Creation Date 02-Jun-2010 Revision Date 18-Jan-2018 Revision Number 3

1. Identification

Product Name Zinc Metal Powder

Cat No. : Z5-500; Z46-3

CAS-No 7440-66-6

Synonyms Zinc Dust (Certified/Technical)

Recommended Use Laboratory chemicals.

Uses advised against Not for food, drug, pesticide or biocidal product use

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Substances/mixtures which, in contact with water, emit Category 1

flammable gases

Pyrophoric solids Category 1
Combustible dust Yes

Label Elements

Signal Word

Danger

Hazard Statements

May form combustible dust concentrations in air In contact with water releases flammable gases which may ignite spontaneously

Catches fire spontaneously if exposed to air



Precautionary Statements

Prevention

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Do not allow contact with air

Wear protective gloves/protective clothing/eye protection/face protection

Keep away from any possible contact with water, because of violent reaction and possible flash fire

Handle under inert gas. Protect from moisture

Skin

Brush off loose particles from skin. Immerse in cool water/wrap with wet bandages

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store under an inert atmosphere

Store in a dry place. Store in a closed container

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Zinc powder - zinc dust (pyrophoric)	7440-66-6	100

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Get medical attention if

symptoms occur.

Inhalation Move to fresh air. If breathing is difficult, give oxygen. Get medical attention if symptoms

occur.

Ingestion Do not induce vomiting. Obtain medical attention.

Most important symptoms and

effects

No information available.

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Dry sand, clay, approved class D extinguishers.

Unsuitable Extinguishing Media DO NOT USE WATER, Carbon dioxide (CO2), Dry chemical, Foam

Flash Point No information available

Method - No information available

Autoignition Temperature 460 °C / 860 °F

Explosion Limits

Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Fine dust dispersed in air may ignite. Pyrophoric: Spontaneously flammable in air. Water reactive. Contact with water liberates extremely flammable gases. Thermal decomposition can lead to release of irritating gases and vapors. Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Hydrogen

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Up

HealthFlammabilityInstabilityPhysical hazards143W

6. Accidental release measures

Personal Precautions Use personal protective equipment. Remove all sources of ignition. Avoid dust formation.

Take precautionary measures against static discharges. Do not get in eyes, on skin, or on

clothina.

Environmental Precautions Should not be released into the environment. See Section 12 for additional ecological

information.

Methods for Containment and Clean Remove all sources of ignition. Do not expose spill to water. Sweep up or vacuum up

spillage and collect in suitable container for disposal. Use spark-proof tools and

explosion-proof equipment. Avoid dust formation.

7. Handling and storage

Handling Use only under a chemical fume hood. Wear personal protective equipment. Avoid dust

formation. Avoid contact with skin, eyes and clothing. Avoid ingestion and inhalation. Handle under an inert atmosphere. Do not allow contact with air. Do not allow contact with water. Keep away from open flames, hot surfaces and sources of ignition. Use spark-proof tools and explosion-proof equipment. Take precautionary measures against static

discharges.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place. Store under an inert

atmosphere. Keep away from heat and sources of ignition. Keep away from water.

8. Exposure controls / personal protection

Exposure GuidelinesThis product does not contain any hazardous materials with occupational exposure

limitsestablished by the region specific regulatory bodies.

Engineering Measures Use only under a chemical fume hood. Use explosion-proof

electrical/ventilating/lighting/equipment. Ensure that eyewash stations and safety showers

are close to the workstation location.

Personal Protective Equipment

Eve/face ProtectionWear appropriate protective eveglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene MeasuresHandle in accordance with good industrial hygiene and safety practice.

Physical and chemical properties

Physical StateSolidAppearanceLight blueOdorOdorless

Odor Threshold

PH

No information available

No information available

Melting Point/Range
419 °C / 786.2 °F
Boiling Point/Range
908 °C / 1666.4 °F
Flash Point
No information available
Evaporation Rate
No information available
Flammability (solid,gas)
No information available

Flammability or explosive limits

Upper
LowerNo data available
No data availableVapor Pressure1 mmHg @ 487 °CVapor DensityNo information available

Specific Gravity 7

Solubility
Partition coefficient; n-octanol/water
Autoignition Temperature
Decomposition Temperature
Viscosity

Insoluble in water
No data available
460 °C / 860 °F
No information available
No information available

Molecular Formula Zn Molecular Weight 65.37

10. Stability and reactivity

Reactive Hazard Yes

Stability Water reactive. Moisture sensitive. Air sensitive. Pyrophoric: Spontaneously flammable in

air.

Conditions to Avoid Avoid dust formation. Incompatible products. Exposure to air. Exposure to moist air or

water. Keep away from open flames, hot surfaces and sources of ignition.

Incompatible Materials Strong oxidizing agents, Strong acids, Strong bases, Amines

Hazardous Decomposition Products Hydrogen

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions Contact with water liberates extremely flammable gases. Pyrophoric: Spontaneously

flammable in air.

11. Toxicological information

Acute Toxicity

Product Information

No acute toxicity information is available for this product

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Zinc powder - zinc dust (pyrophoric)	LD50 = 630 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic

No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

No information available Irritation Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Zinc powder - zinc	7440-66-6	Not listed				
dust (pyrophoric)						

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

No information available. **Teratogenicity**

STOT - single exposure None known STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects,both acute and No information available

delayed

Endocrine Disruptor Information No information available

Other Adverse Effects Tumorigenic effects have been reported in experimental animals. See actual entry in

RTECS for complete information.

12. Ecological information

This product contains the following substance(s) which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Zinc powder - zinc dust	EC50: 0.09 - 0.125 mg/L,	LC50: 0.211 - 0.269 mg/L,	Not listed	EC50: 0.139 - 0.908 mg/L,
(pyrophoric)	72h static	96h semi-static (Pimephales		48h Static (Daphnia magna)
	(Pseudokirchneriella	promelas)		
	subcapitata)	LC50: = 2.66 mg/L, 96h		
	EC50: 0.11 - 0.271 mg/L,	static (Pimephales		
	96h static	promelas)		
	(Pseudokirchneriella	LC50: = 30 mg/L, 96h		
	subcapitata)	(Cyprinus carpio)		
		LC50: = 0.45 mg/L, 96h		
		semi-static (Cyprinus carpio)		
		LC50: = 7.8 mg/L, 96h static		
		(Cyprinus carpio)		
		LC50: = 3.5 mg/L, 96h static		
		(Lepomis macrochirus)		
		LC50: = 0.24 mg/L, 96h		
		flow-through (Oncorhynchus		
		mykiss)		

LC50: = 0.59 mg/L, 96h	
semi-static (Oncorhynchus	
mykiss)	
LC50: 2.16 - 3.05 mg/L, 96h	
flow-through (Pimephales	
promelas)	
LC50: = 0.41 mg/L, 96h	
static (Oncorhynchus	
mykiss)	

Persistence and Degradability

No information available

Bioaccumulation/ Accumulation No information available.

Mobility No information available.

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN1436

Proper Shipping Name ZINC POWDER

Hazard Class 4.3 Subsidiary Hazard Class 4.2 Packing Group ||

TDG

UN-No UN1436

Proper Shipping Name ZINC POWDER

Hazard Class 4.3 Subsidiary Hazard Class 4.2 Packing Group II

IATA

UN-No UN1436

Proper Shipping Name ZINC POWDER

Hazard Class 4.3 Subsidiary Hazard Class 4.2 Packing Group II

IMDG/IMO

UN-No UN1436

Proper Shipping Name ZINC POWDER

Hazard Class 4.3 Subsidiary Hazard Class 4.2 Packing Group II

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Zinc powder - zinc dust	Х	Х	-	231-175-3	-		Х	-	Χ	Х	Χ
(pyrophoric)											

Legend:

X - Listed

- E Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.
- F Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
- N Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
- P Indicates a commenced PMN substance

- R Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
- S Indicates a substance that is identified in a proposed or final Significant New Use Rule
- T Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b)

Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Zinc powder - zinc dust (pyrophoric)	7440-66-6	100	1.0

SARA 311/312 Hazard Categories

See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Zinc powder - zinc dust (pyrophoric)	-	-	Х	X

Clean Air Act

Not applicable

OSHA Occupational Safety and Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Zinc powder - zinc dust (pyrophoric)	1000 lb	<u>-</u>

California Proposition 65

This product does not contain any Proposition 65 chemicals

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Zinc powder - zinc dust	X	X	X	-	X
(pyrophoric)					

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

	16. Other information
Prenared Ry	Regulatory Affairs

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 02-Jun-2010

 Revision Date
 18-Jan-2018

 Print Date
 18-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

Appendix E: Accident Report Form

Employee Accident Report

Name	SS#	EMPLOYEE _Emp ID#			
Home Address					
Street	Age:	city _ Employment Status: Full tir	zip code nePart time	phone	
Job Title		Time in Prese	nt Position Yr	sMonths	
Department		Work Address			_
Supervisor			building/room#	phone	
name		building/room#	!	phone	
Accident Date Time What were you doing and using (tools, cho	_am/pm L micals, equipment,	ocationetc.) when the accident occurre	d? Describe what happe	ened.	
Was this part of your normal job duty? Parts of body affected or injured					-
Witnesses:		1			
name Report prepared by (if different from the in	phone	name	phone		
report prepared by (it different from the fi	jurea employee)	name	phone		<u></u>
more information regarding workers' compregarding this accident to the Prime Contre	actors claim admin	istrators.		•	
	SUPER	VISOR/CHARGE PERSO	N		
This accident was reported to me on		at	Cost Center/Dept #		
IS FURTHER INVESTIGATION REQUI	(date)	(tim	e)		
io i okimokin v Editorition kegon	·	Supervisor/Charg	e Person Signature	Date	
	HEA	LTH CARE PROVIDER			
Treated by:					
Address print name		sign	ature		
name of facility	str	eet city	state	zip code	phone
Hospitalized overnight as inpatient?	yesno	(if emergency room only mar	k no)		
Diagnosis/Assessment					
Reaggravation of previous work injury?		U GET ME TOTAL N			