737 4th AVENUE SITE

731-747 4th AVENUE, BROOKLYN, NEW YORK

EXCAVATION WORK PLAN FOR CONSTRUCTION

NYSDEC Site Number: C224332

Prepared for:

737 4th Avenue LLC 26 Harbor Park Drive Port Washington, NY 11050

Prepared by:

P.W. Grosser Consulting Engineer & Hydrogeologist P.C.
630 Johnson Avenue, Suite 7
Bohemia, New York 11716
(631) 589-6353

Revisions to Final Excavation Work Plan:

Revision No.	Date Submitted	Summary of Revision	NYSDEC/NYSDOH Approval Date

FEBRUARY 2022

CERTIFICATION STATEMENT

I, Paul K. Boyce, PE, certify that I am currently a New York State registered professional engineer (PE) as defined in 6 NYCRR Part 375 and that this Excavation Work Plan (EWP) was prepared in accordance with applicable statutes and regulations and in substantial conformance with the New York State Department of Environmental Conservation (NYSDEC) Division of Environmental Remediation (DER) Technical Guidance for Site Investigation and Remediation (DER-10).

P.E.

02. 01. 2022 DATE

Table of Contents

1.0	INTROL	JUCTION1
	1.1 1.2	Site Location and Description
2.0	NOTIFIC	CATION REQUIREMENTS2
3.0	SCOPE	OF WORK3
	3.1 3.2	Excavation Overview
4.0	HEALTH	d AND SAFETY4
	4.1 4.2	Health and Safety Plan
TABLES	6	
Table 1	=	Notifications
FIGURE	ES	
Figure :	1	Site Location Plan
Figure :	2	Site Plan
APPEN	DICES	
Append	dix A	Change of Use Notification Form
Append	dix B	421a Pile Location
Append		HASP
Append	dix D	CAMP

List of Acronyms

AOC Area of Concern

AST Aboveground Storage Tank

ASTM American Society for Testing and Materials

AWQS Ambient Water Quality Standards
BCP Brownfield Cleanup Program

BTEX Benzene, Toluene, Ethylbenzene, and Xylenes

°C degrees Celsius

COC Contaminant of Concern

COPC Contaminants of Potential Concern
CVOCs Chlorinated Volatile Organic Compounds
DER Department of Environmental Remediation

EDR Environmental Data Resources

ELAP Environmental Laboratory Approval Program

ESA Environmental Site Assessment

°F Degrees Fahrenheit

FOIA Freedom of Information Act
GIS Geographic Information System
GPR Ground Penetrating Radar

LTANKS Leaking Tanks

MCL Maximum Contaminant Level
MDL Method Detection Limit
mg/kg Milligrams per kilogram
mg/L Milligrams per liter

mg/m3 Milligrams per cubic meter
μg/kg Micrograms per kilogram
μg/L Micrograms per liter

μg/m3 Micrograms per cubic meter

msl Mean sea level
NFA No Further Action
NYC New York City
NYS New York State

NYSDEC New York State Department of Environmental Conservation

NYSDOH New York State Department of Health
NYSDOL New York State Department of Labor

OSHA Occupational Safety and Health Administration

PAHs Polycyclic Aromatic Hydrocarbons

PCBs Polychlorinated Biphenyls
PCE Tetrachloroethylene
PGM Portable Gas Monitor
PID Photoionization detector

1.0 INTRODUCTION

P.W. Grosser Consulting Engineer & Hydrogeologist, P.C. (PWGC) has prepared the following Excavation Work Plan (EWP) to outline procedures and a scope of work intended to begin preliminary foundation work at the subject property.

1.1 Site Location and Description

The subject property consists of one parcel located at 731 to 747 4th Avenue in the Greenwood Heights neighborhood of Brooklyn, New York. The site is in the Borough of Brooklyn and Kings County. The property is identified in the New York City Tax Map as Block 652 Lot 1. It was recently merged and previously consisted of Lots 1 and 7. A Site Location Map is included as **Figure 1** and a Site Plan is included as **Figure 2**.

1.2 Current Site Use

- 737 4th Avenue (Former Lot 1) measures approximately 15,017 square feet and is improved with a two-story frame commercial building measuring approximately 4,162 square feet and an asphalt paved parking lot. The building is currently utilized as a Dunkin Donuts restaurant and is anticipated to be vacant by January 31, 2022.
- one-story concrete block buildings with footprints measuring 2,508 and 1,528 square feet and one two-story building with a footprint measuring 1,003 square feet. The buildings occupy the entire lot. The two-story building is occupied by an auto body shop that is still occupied. The retail building has two vacant units and a deli in the third unit that is still occupied.

2.0 NOTIFICATION REQUIREMENTS

Prior to the start of redevelopment activities, the site owner or their representative will notify the NYSDEC and New York State Department of Health (NYSDOH). A minimum of 7-days notification for non-intrusive work that requires regulatory oversight (material import, material placement, demarcation installation, etc.) and 15-days notification for intrusive site work will be provided. **Table 1** includes the current contact information for the above notification. The information on this table will be updated as necessary to provide accurate contact information.

Table 1: Notifications*

Contact Name/Organization	Phone	Email
Ronnie Lee, NYSDEC	518-402-9615	Ronnie.Lee@dec.ny.gov
James Sullivan, NYSDOH	518-402-5584	James.Sullivan@health.ny.gov

^{*} Note: Notifications are subject to change and will be updated as necessary.

In addition to the notification for the start of work, additional notifications may be made as work progresses, such as:

- Changes to the scope of work included in Section 3.0 of this EWP will be reported to the notification list as soon as possible.
- Changes to known existing environmental conditions will be reported to the notification list as they are discovered.

A Change of Use Notification Form has been completed for this EWP and is included as Appendix A.

3.0 SCOPE OF WORK

Work detailed in this EWP is tentatively scheduled to begin in March of 2022. A confirmed start date will be provided with notice provided as discussed in Section 2.0.

Work will be performed in compliance with this EWP, 29 Code of Federal Regulations (CFR) 1910.120, and 20 CFR 1926 Subpart P.

Health and safety requirements for work covered by this EWP are summarized in Section 4.0.

3.1 Excavation Overview

At this time, excavation and/or intrusive efforts will be limited to the installation of a pile for the proposed redevelopment of the property. The installation of a pile would take place by method of hydraulic/pneumatic drilling. The location of the pile is illustrated on **Appendix B** which also includes data from prior environmental investigations performed by PWGC.

3.2 Excavation Contingency Plan

If underground tanks or other previously unidentified contaminant sources are found during this effort, intrusive activities will be suspended in the affected area until sufficient equipment is mobilized to address the condition. Sampling will be performed on product, sediment, and surrounding soils, etc. as necessary to determine the nature of the material and proper disposal method. Chemical analysis may be performed unless the site history and previous sampling results provide a sufficient justification to limit the sampling. Sampling, if necessary, will be coordinated with the NYSDEC and NYSDOH for approval prior to sampling.

Identification of unknown or unexpected contaminated media identified by screening during intrusive site work will be promptly communicated by email and/or phone to the NYSDEC and NYSDOH project managers. Reportable quantities of petroleum product will also be reported to the NYSDEC spills hotline, if appropriate. These findings will be also included in the Final Engineering Report (FER).

4.0 HEALTH AND SAFETY


4.1 Health and Safety Plan

PWGC has developed a Health and Safety Plan (HASP) to be followed during the implementation of these intrusive activities. The HASP has been developed in accordance with DER-10, Section 1.9. Activities performed under the HASP will comply with applicable parts of OSHA Regulations, primarily 29 CFR Parts 1910 and 1926. Subcontractors will have the option of adopting this HASP or developing their own site-specific HASP. If a subcontractor prepares their own HASP, it must meet the minimum requirements of this HASP and must be made available to PWGC and the NYSDEC prior to implementation of this EWP. A copy of the HASP is included in **Appendix C**.

4.2 Community Air Monitoring Plan

In addition to the HASP, a Community Air Monitoring Plan (CAMP) has been developed. The purpose of the CAMP is to address community health and safety to ensure that the public living and working near the site, as well as employees or visitors to any facility located on the site, are protected from exposure to site contaminants during intrusive activities. This CAMP has been developed in accordance with DER-10, Section 1.9 and Appendix 1A. A copy of the CAMP is included as **Appendix D**.

FIGURES

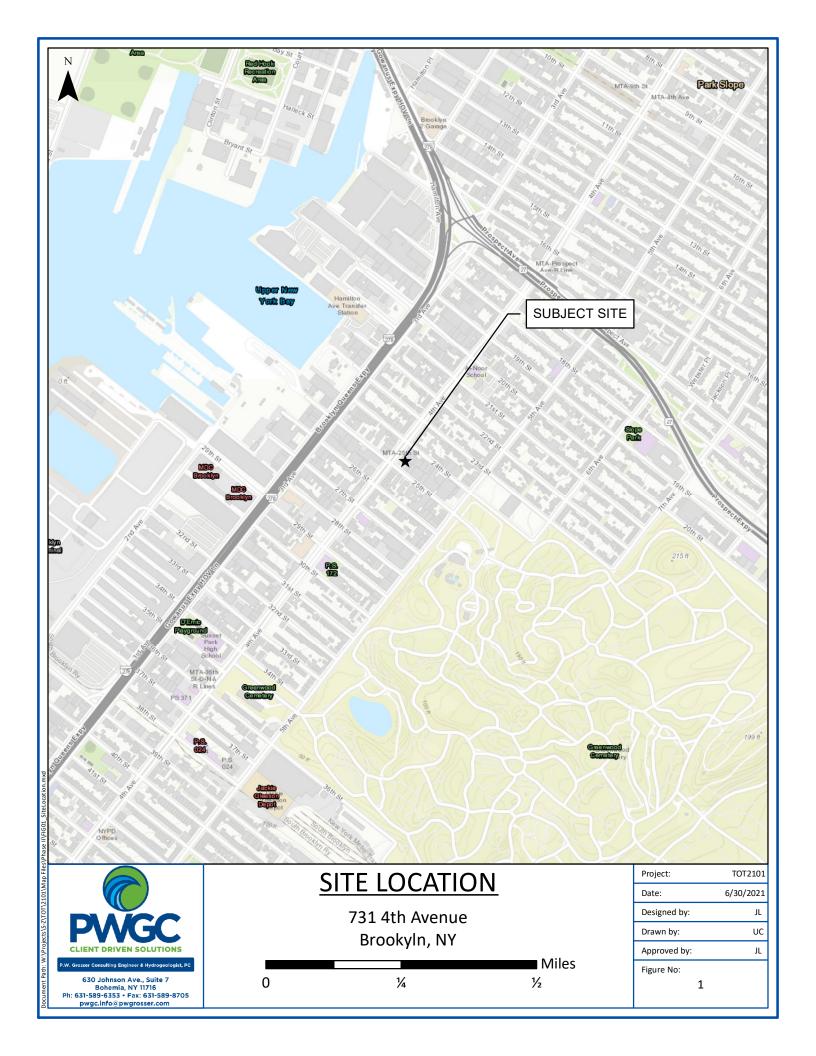



APPENDIX A

Change of Use Notification Form

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION



60-Day Advance Notification of Site Change of Use, Transfer of Certificate of Completion, and/or Ownership

Required by 6NYCRR Part 375-1.11(d) and 375-1.9(f)

To be submitted at least 60 days prior to change of use to:

Chief, Site Control Section New York State Department of Environmental Conservation Division of Environmental Remediation, 625 Broadway Albany NY 12233-7020

I.	Site Name	737 4th Avenue Site	DEC Site ID No. C224332				
II.	Contact In	nformation of Person Submitting Notification: 737 4th Avenue, LLC					
	Address1: Address2: Phone:	26 Harbor Park Drive	26 Harbor Park Drive				
		Port Washington, NY 11050					
		516-207-7400	E-mail: LBrodsky@bebcapital.com				
III.	Type of C	hange and Date: Ind	licate the Type of Change(s) (check all that apply):				
	Change	e in Ownership or Cha	ange in Remedial Party(ies)				
	Transfer of Certificate of Completion (CoC)						
	Other (e.g., any physical alteration or other change of use)						
	C other (o.g., any physical are	eration of other change of use)				
	Proposed 1	Date of Change (mm/o	dd/yyyy): Mar 27, 2022				
IV.	Descripti parcel inf		ed change(s) indicated above and attach maps, drawings, and/or				
	Installation —	າ of one pile in the south	nern section of the site as indicated on the attached plan.				
	not affect needed). This change Remedial the vicinity may be con	the site's proposed, on the site is proposed, or the site is proposed.	t explain <u>and</u> advise the Department how such change may or may ongoing, or completed remedial program (attach additional sheets if apact on completing the Remedial Investigation. If necessary, for the not the pile may be permitted to an extent. If contamination is identified in extent of it cannot be excavated, a Track 2 or Track 4 remedial strategy ck 1 remedial strategy. For construction purposes, limited excavation is				

Name:		
	(Signature)	(Date)
	(Print Name)	
Address1:		
Address2:		
	E-mail:	
	an requiring periodic certification of in	stitutional controls/engineering cont
Management Pla (IC/ECs), indica	an requiring periodic certification of in the who will be the certifying party (attained). Owner Prospective Remedial Part	ach additional sheets if needed).
Management Pla (IC/ECs), indica Prospective	ate who will be the certifying party (atta	ach additional sheets if needed).
Management Pla (IC/ECs), indica Prospective	ate who will be the certifying party (atta	ach additional sheets if needed).
Management Pla (IC/ECs), indica Prospective Name: Address1:	ote who will be the certifying party (atta	ach additional sheets if needed). y Prospective Owner Represen
Management Pla (IC/ECs), indica Prospective Name: Address1: Address2:	ate who will be the certifying party (atta	y Prospective Owner Represen
Management Pla (IC/ECs), indica Prospective Name: Address1: Address2: Phone:	Owner Prospective Remedial Part E-mail:	y Prospective Owner Represen
Management Pla (IC/ECs), indica Prospective Name: Address1: Address2: Phone: Certifying Party	Owner Prospective Remedial Part E-mail:	y Prospective Owner Represen
Prospective Name: Address1: Address2: Phone: Certifying Party Address1:	Owner Prospective Remedial Part E-mail: Name:	y Prospective Owner Represen
Management Pla (IC/ECs), indica Prospective Name: Address1: Address2: Phone: Certifying Party Address1: Address2:	Owner Prospective Remedial Part E-mail:	y Prospective Owner Represe

VII. Agreement to Notify DEC after Transfer: If Section VI applies, and all or part of the site will be sold, a letter to notify the DEC of the completion of the transfer must be provided. If the current owner is also the holder of the CoC for the site, the CoC should be transferred to the new owner using DEC's form found at http://www.dec.ny.gov/chemical/54736.html. This form has its own filing requirements (see 6NYCRR Part 375-1.9(f)).

Signing below indicates that these notices will be provided to the DEC within the specified time frames. If the sale of the site also includes the transfer of a CoC, the DEC agrees to accept the notice given in VII.3 below in satisfaction of the notice required by VII.1 below (which normally must be submitted within 15 days of the sale of the site).


Within 30 days of the sale of the site, I agree to submit to the DEC:

- 1. the name and contact information for the new owner(s) (see §375-1.11(d)(3)(ii));
- 2. the name and contact information for any owner representative; and
- 3. a notice of transfer using the DEC's form found at http://www.dec.ny.gov/chemical/54736.html (see §375-1.9(f)).

Name:				
	(Signature)		 (Date)	
	(Print Name)			
Address1:				
Address2:				
Phone:		E-mail:		

Continuation Sheet Prospective Owner/Holder Prospective Remedial Party Prospective Owner Representative Name: Address1: Address2: E-mail: Phone: Prospective Owner/Holder Prospective Remedial Party Prospective Owner Representative Name: Address1: Address2: E-mail: Phone: Prospective Owner/Holder Prospective Remedial Party Prospective Owner Representative Name: Address1: Address2: E-mail: Phone: Prospective Owner/Holder Prospective Remedial Party Prospective Owner Representative Name: Address1: Address2: E-mail: Phone: Prospective Owner/Holder Prospective Remedial Party Prospective Owner Representative Name: Address1: _____ E-mail: _____ Phone: Prospective Owner/Holder Prospective Remedial Party Prospective Owner Representative Address1: E-mail: Phone:

APPENDIX B 421a PILE LOCATION

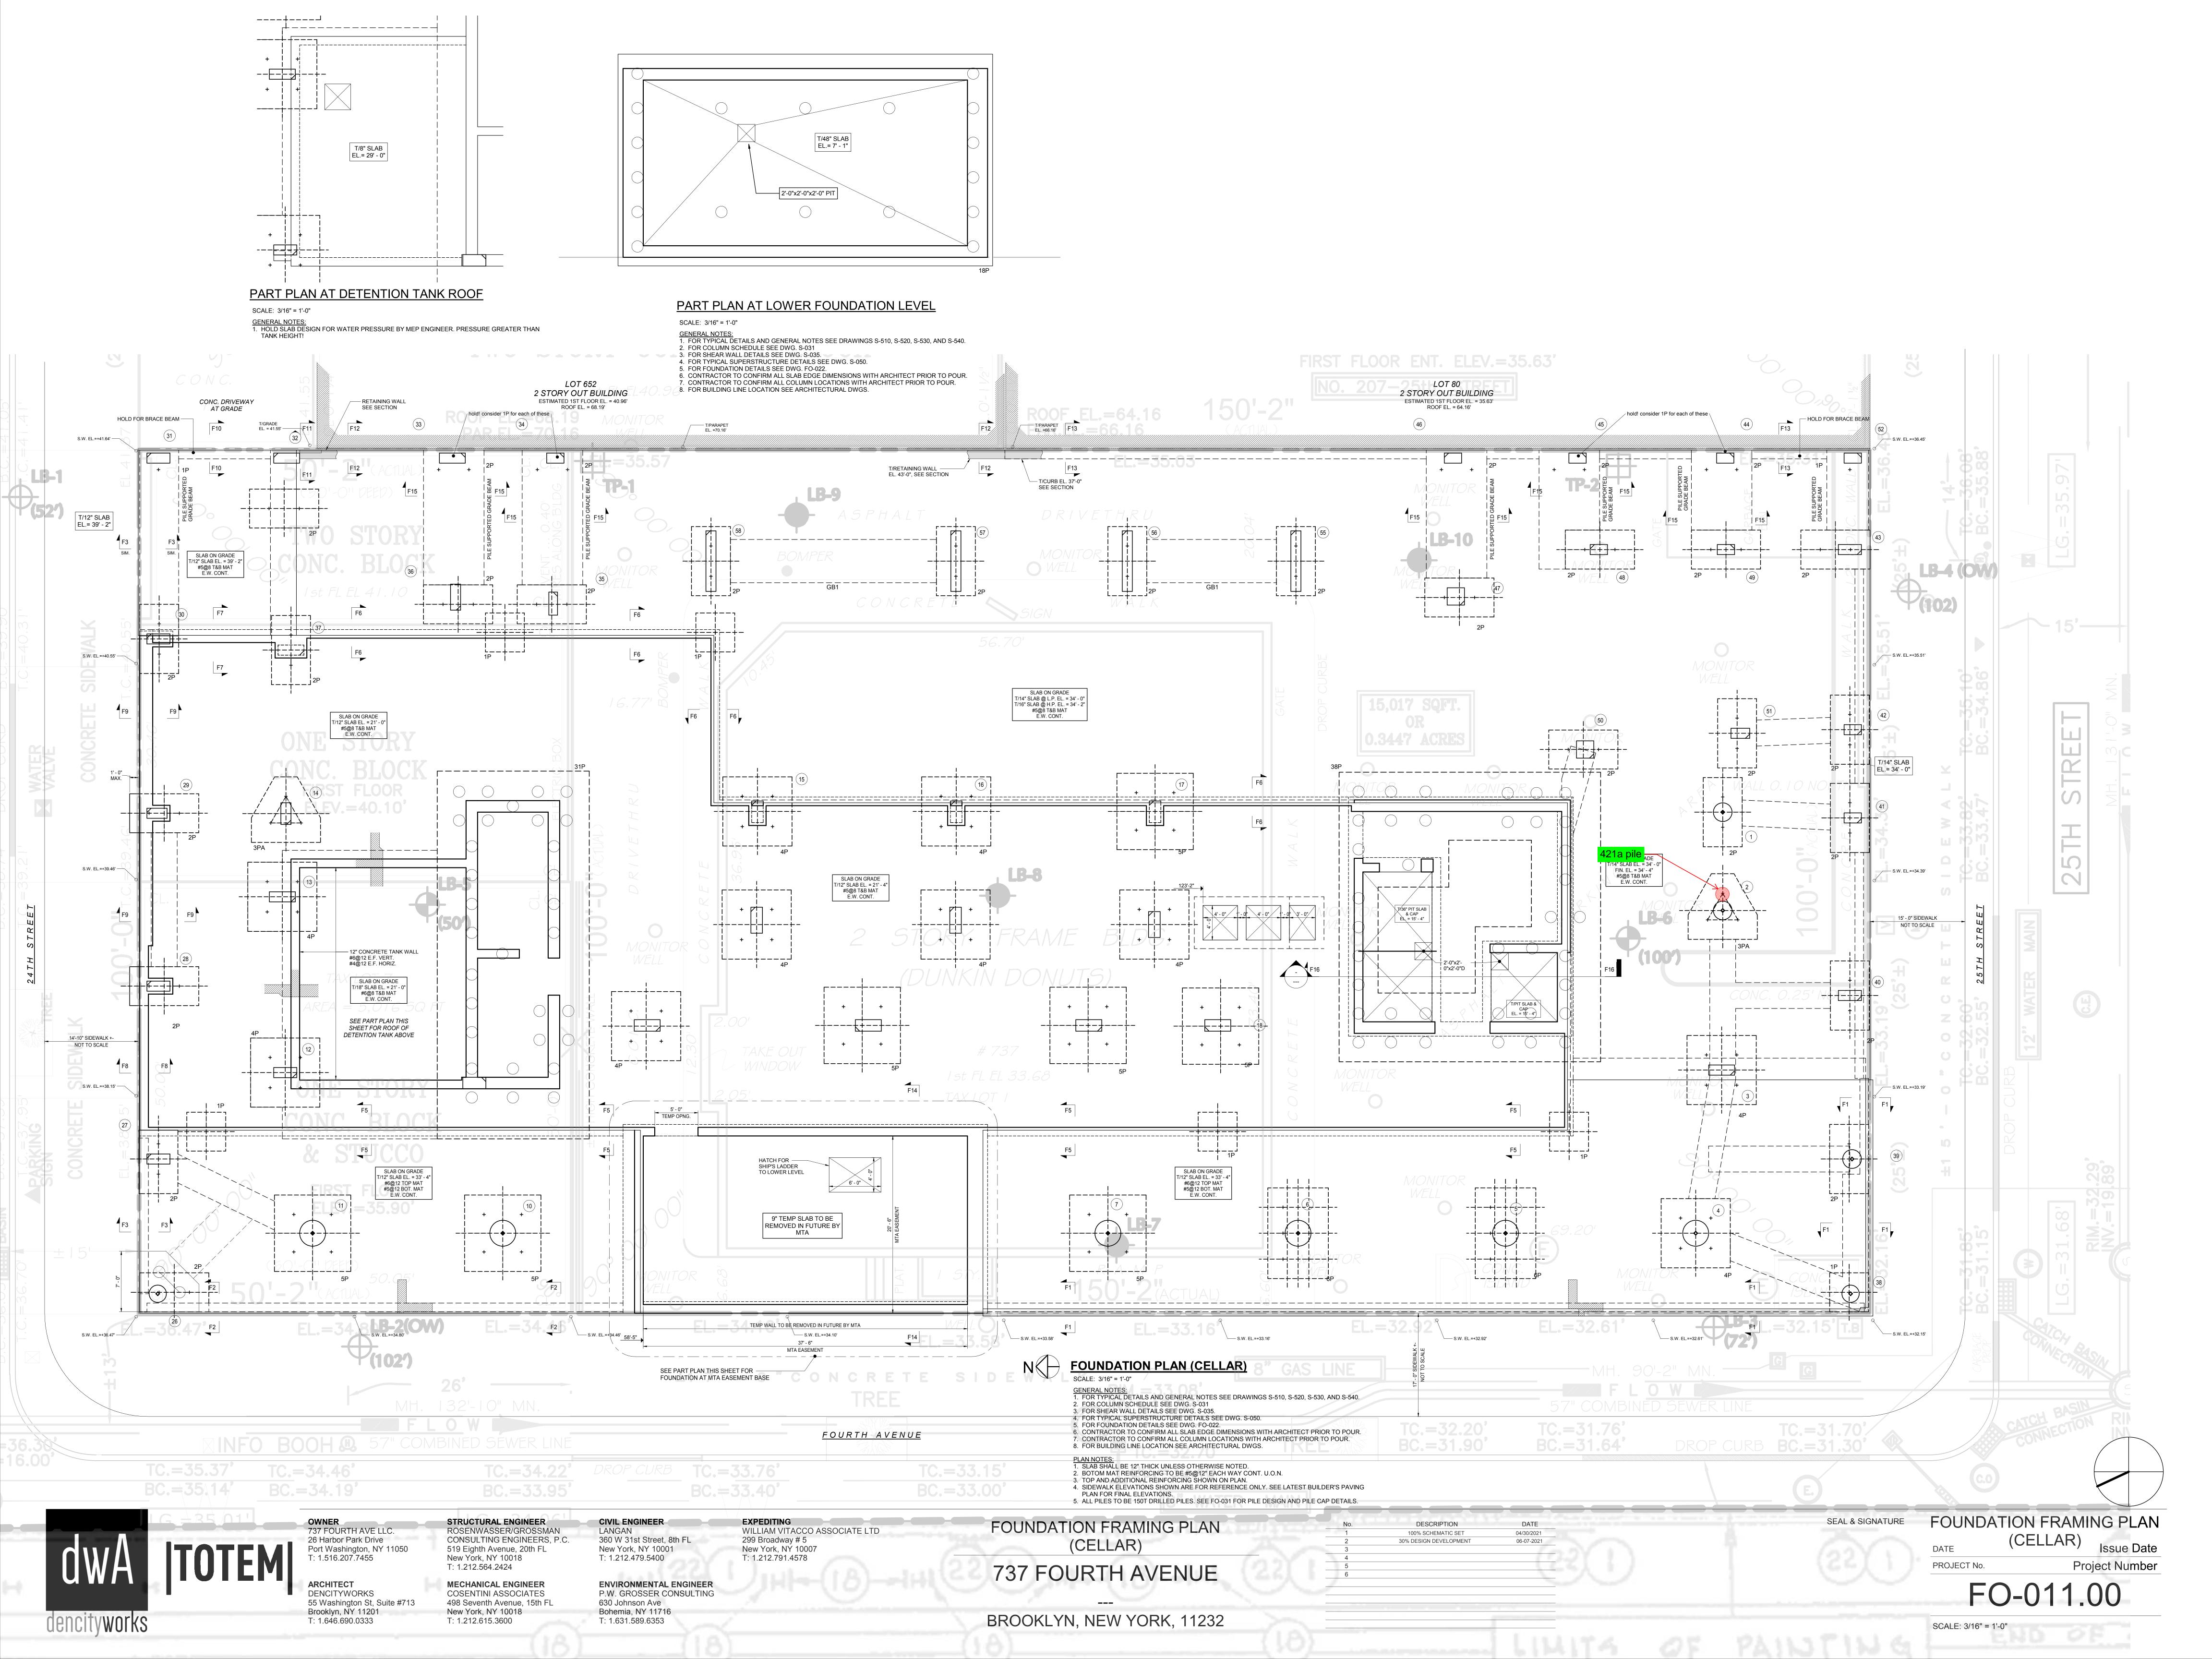

APPENDIX C HASP

737 4th AVENUE SITE 731-747 4th AVENUE BROOKLYN, NEW YORK SITE #C224332

Health and Safety Plan

Submitted To:



New York State Department of Environmental Conservation Division of Environmental Remediation 47-20 21st Street Long Island City, NY 11101

Prepared For:

737 4th Avenue, LLC 26 Harbor Park Drive Port Washington, NY 11050

Prepared By:



P.W. Grosser Consulting Inc. 630 Johnson Avenue, Suite 7 Bohemia, NY 11716 Phone: 631-589-6353

Fax: 631-589-8705

Jennifer Lewis, PG, Vice President

JenniferL@pwgrosser.com

PWGC Project Number: TOT2101



TABLE OF CONTENTS

1.0	ST	ATEMENT OF COMMITMENT	1
2.0	INT	FRODUCTION AND SITE ENTRY REQUIREMENTS	2
2.1 2.2 2.3	ı	Site Safety Plan Acceptance, Acknowledgement, and Amendments Daily Safety Meetings Key Personnel – Roles and Responsibilities	2
3.0	НА	ZARDS OF THE SITE	4
3.1	(Chemical Hazards	4
3.	1.1	Soil	4
3.	1.2	Groundwater	4
3.	1.3	•	
3.2	١	Biological Hazards	4
_	2.1		
_	2.2		
_	2.3		
3.3		Physical Hazards	
	3.1	•	
	3.2	, , , ,	
	3.3		
_	3.4	F	
_	3.5	· · · · · · · · · · · · · · · · · · ·	
_	3.6	- 1	
	3.7	·····/ - 4 ·· / ·· · · · · · · · · · · · · · · ·	
3.	3.8	Electrocution	7
4.0	PE	RSONAL PROTECTIVE EQUIPMENT	8
4.1	ı	Level D	8
4.2	ı	Level C	8
4.3	ı	Level B	9
5.0	СО	NTINGENCY PLAN	11
5.1		Emergency Equipment Onsite	
5.2		Emergency Telephone Numbers	
5.3		Personnel Responsibilities During an Emergency	
5.4		Medical Emergencies	
5.5		Fire or Explosion	
5.6		Evacuation Routes	IZ



FIGURES

Figure 1 Hospital Route Map

APPENDICES

Appendix A Site Safety Plan Acknowledgement Form Appendix B Site Safety Plan Amendment Form

Appendix C Safety Data Sheets

Appendix D Heat/Cold Stress Protocols
Appendix E Field Accident Report



1.0 STATEMENT OF COMMITMENT

Onsite employees may be exposed to chemical contaminants of concern identified within the soil/fill during the planned remedial investigation activities to be performed on the 731 to 747 4th Avenue site. PWGC's policy is to minimize the possibility of work-related exposure through awareness and qualified supervision, health and safety training, use of appropriate PPE, and the following activity specific safety protocols contained in this Health and Safety Plan (HASP). PWGC has established a guidance program to implement this policy in a manner that protects personnel to the maximum reasonable extent.

This HASP describes emergency response procedures for actual and potential chemical hazards. Persons are to acknowledge that they understand the potential hazards and the contents of this Health and Safety policy by signing off on receipt of their individual copy of the document. Contractors and suppliers are retained as independent contractors and are responsible for ensuring the health and safety of their own employees as it relates to general construction practices.



2.0 INTRODUCTION AND SITE ENTRY REQUIREMENTS

This document describes the health and safety guidelines developed by PWGC at the request of 737 4th Avenue, LLC for the proposed RI to be performed at the 731 to 747 4th Avenue site to protect on-site personnel, visitors, and the public from exposure to potential hazardous materials or wastes. In accordance with the most recently adopted and applicable Occupational Safety and Health Administration (OSHA) 29 Code of Federal Regulations (CFR) Part 1910.120 Hazardous Waste Operations and Emergency Response Final rule and 29 CFR 1926 Construction Safety Standards, this HASP, including the attachments, addresses safety and health hazards relating to each phase of site operations and is based on the best information available. The HASP may be revised by PWGC at the request of 737 4th Avenue, LLC upon receipt of new information regarding site conditions. Changes will be documented by written amendments.

2.1 Site Safety Plan Acceptance, Acknowledgement, and Amendments

The project superintendent and the site safety officer are responsible for informing personnel entering the work area of the contents of this plan and ensuring that each person signs the safety plan acknowledging the on-site hazards and procedures required to minimize exposure to adverse effects of these hazards. A copy of the Acknowledgement Form is included as **Appendix A**. Site conditions may warrant an amendment to the HASP. Amendments to the HASP are acknowledged by completing the form in **Appendix B**.

2.2 Daily Safety Meetings

Each day before work begins; the site safety officer will hold safety (tailgate or toolbox) meetings to ensure that onsite personnel understand the site conditions and operating procedures and to address safety questions and concerns. Meeting minutes and attendance will be recorded. Project staff will discuss and remedy health and safety issues at these meetings.

2.3 Key Personnel – Roles and Responsibilities

The following key personnel are planned for this project:

- Project Manager Ms. Jennifer Lewis, PG or alternate
- Site Safety Officer Mr. Michael Pecoraro or alternate

The project manager is responsible for overall project administration and, with guidance from the site safety officer, for supervising the implementation of this HASP. The site safety officer will conduct daily



(tail gate or toolbox) safety meetings at the project site and oversee daily safety issues. Each subcontractor and supplier (defined as an OSHA employer) is also responsible for the health and safety of its employees. If there is any dispute about health and safety or project activities, on-site personnel will attempt to resolve the issue. If the issue cannot be resolved at the site, then the project manager will be consulted.

The site safety officer is responsible for the following:

- Educating personnel about information in this HASP and other safety requirements to be observed during site operations, including, but not limited to, designation of work zones and levels of protection and emergency procedures dealing with fire and first aid.
- Coordinating site safety decisions with the project manager.
- Monitoring the condition and status of known on-site hazards specified in this HASP.
- Maintaining records of safety problems, corrective measures and documentation of chemical exposures or physical injuries (the site safety officer will document these conditions in a bound notebook and maintain a copy of the notebook on-site).

The person who observes safety concerns and potential hazards that have not been addressed in the daily safety meetings should immediately report their observations/concerns to the site safety officer or appropriate key personnel.



3.0 HAZARDS OF THE SITE

3.1 Chemical Hazards

Safety data sheets for the known and suspected chemicals that may be encountered at the site are included as Appendix C.

3.1.1 Soil

VOCs, SVOCs, and metals exceeding Unrestricted Use Soil Cleanup Objectives (SCOs) were detected in soils throughout the site. VOC contaminants of concern (COCs) include benzene, toluene, ethylbenzene, and xylene (BTEX) compounds – these concentrations were detected in two samples between 20 and 22 feet below grade. SVOCs appear to largely be related to the presence of historic fill material, although may also be associated with on-site fuel oil storage tanks, with total SVOCs ranging between less than detection limits in the deeper samples up to 385.76 mg/kg in shallower samples. The primary metal COCs included arsenic (maximum of 17.3 mg/kg), barium (maximum of 517 mg/kg), chromium (maximum of 50.8 mg/kg), mercury (maximum 3.57 mg/kg), lead (maximum of 2,740 mg/kg), and cadmium (maximum of 210 mg/kg).

3.1.2 Groundwater

Groundwater sampling was limited to VOCs collected from previously installed monitoring wells on the southern section of the Site. Samples were collected from nine of these wells. Three monitoring wells on the upgradient portion of the Site contained BTEX compounds that exceeded NYSDEC TOGS 1.1.1 Ambient Water Quality Standards (AWQS).

3.1.3 Soil Vapor

Sub-slab soil vapor sampling was conducted across the northern section of the Site. Multiple VOCs were detected in each soil vapor sample. Petroleum related compounds, such as benzene, ethylbenzene, toluene, and/or xylenes were detected in each soil vapor sample at relatively low concentrations as well as one detection of tetrachloroethene (PCE) in one soil vapor sample.

3.2 Biological Hazards

Work will be performed in an urban environment; however, during the course of the project, there is potential for workers to come into contact with biological hazards such as animals, insects, and plants.



3.2.1 Animals

The Site is located in a predominantly urban area. It is possible that dogs, cats, rats, and mice may be present. Workers shall use discretion and avoid all contact with animals.

3.2.2 Insects

Insects, such as mosquitoes, ticks, bees, and wasps may be present during certain times of the year. Workers will be encouraged to wear repellents and PPE, if deemed necessary, when working in areas where insects are expected to be present.

During the months of April through October, particular caution must be exercised to minimize exposure to deer ticks and the potential for contracting Lyme disease. Specific precautionary work practices that are recommended include the following:

- Cover your body as much as possible. Wear long pants and long-sleeved shirts. Light color clothing makes spotting of ticks easier.
- Try to eliminate possible paths by which the Deer Tick may reach unprotected skin. For example, tuck bottoms of pants into socks or boots and sleeves into gloves. (Duct tape may be utilized to help seal cuffs and ankles). If heavy concentrations of ticks or insects are anticipated or encountered, Tyvek coveralls may be utilized for added protection when the potential for heat stress is not a concern.
- Conduct periodic and frequent, (e.g., hourly), surveys of your clothing for the presence of ticks.
 Remove any tick, save it and report to the clinic with the tick.
- Use insect /tick repellents that contain the chemical DEET (n,n-Diethyltoluamide). Apply repellents in accordance with manufacturers' recommendations. These repellents are readily available and include such brands as Deep Woods OFF and Maximum Strength OFF.

3.2.3 Plants

The site is currently vacant; however, portions of the exterior may contain poison ivy, sumac and oak may be present on site. The FTL/SHSO should identify the susceptible individuals. Worker shall avoid all contact with these plants.



3.3 Physical Hazards

Most safety hazards are discussed in the Activity Hazard Analyses (AHA) in Appendix B for the different phases of the project. In addition to the AHAs, general work rules and other safety procedures are described in Section 11.0 of this HASP.

3.3.1 Temperature Extremes

3.3.1.1 Heat Stress

Heat stress is a significant potential hazard, which is greatly exacerbated with the use of PPE in hot environments. The potential hazards of working in hot environments include dehydration, cramps, heat rash, heat exhaustion, and heat stroke.

3.3.1.2 Cold Stress

At certain times of the year, workers may be exposed to the hazards of working in cold environments. Potential hazards in cold environments include frostbite, trench foot or immersion foot, hypothermia as well as slippery surfaces, brittle equipment, and poor judgment.

PWGC's Heat/Cold Stress Protocols are specified in **Appendix D**.

3.3.2 Steam, Heat, and Splashing

Exposure to steam/heat/splashing hazards can occur during steam cleaning activities. Splashing can also occur during well development and sampling activities. Exposure to steam/heat/splashing can result in scalding/burns, eye injury, and puncture wounds.

3.3.3 Noise

Noise is a potential hazard associated with the operation of heavy equipment, drill rigs, pumps and engines. Workers will wear hearing protection while in the work zone when these types of machinery are operating.

3.3.4 Fire and Explosion

When conducting excavation or drilling activities, the opportunity of encountering fire and explosion hazards may exist from encountering underground utilities, from the use of diesel engine equipment, and other potential ignition sources. During dry periods there is an increased chance of forest and brush fires starting at the job site. If these conditions occur no smoking will be permitted at the site and all operations involving potential ignition sources will be monitored continuously (fire watch).



3.3.5 Manual Lifting/Material Handling

Manual lifting of heavy objects may be required. Failure to follow proper lifting technique can result in back injuries and strains. Back injuries are a serious concern as they are the most common workplace injury, often resulting in lost or restricted work time, and long treatment and recovery periods.

3.3.6 Slips, Trips, and Falls

Working in and around the site will pose slip, trip and fall hazards due to slippery surfaces that may be oil covered, or from rough terrain, surfaces that are steep inclines, surfaced debris, or surfaces which are wet from rain or ice. Falls may result in twisted ankles, broken bones, head trauma or back injuries.

3.3.7 Heavy Equipment Operation

An excavator/backhoe will be used to excavate where required. Working with or near heavy equipment poses many potential hazards, including electrocution, fire/explosion, being struck by or against, or pinched/caught/crushed by, and can result in serious physical harm.

3.3.8 Electrocution

Encountering underground utilities may pose electrical hazards to workers. Additionally, overhead electrical lines can be a concern during drilling operations. Potential adverse effects of electrical hazards include burns and electrocution, which could result in death.



4.0 PERSONAL PROTECTIVE EQUIPMENT

PPE shall be selected in accordance with OSHA 29 CFR 1910.120(c), (g), and 1910.132. Protective equipment shall be National Institute for Occupational Safety and Health (NIOSH) approved and respiratory protection shall conform to OSHA 29 CFR Part 1910.133 and 1910.134 specifications; head protection shall conform to 1910.135; eye and face protection shall conform to 1910.133; and foot protection shall conform to 1910.136. The only true difference among the levels of protection from D thru B is the addition of the type of respiratory protection. It is anticipated that work will be performed in Level D PPE.

4.1 Level D

Level D PPE shall be donned when the atmosphere contains no known hazards and work functions preclude splashes, immersion, or the potential for inhalation of, or contact with, hazardous concentrations of harmful chemicals. Level D PPE consists of:

- standard work uniform, coveralls, or Tyvek*, as needed;
- steel toe work boots;
- hard hat;
- gloves, as needed;
- safety glasses;
- hearing protection;
- equipment replacements are available as needed.

4.2 Level C

Level C PPE shall be donned when the concentrations of measured total organic vapors in the breathing zone exceed background concentrations (using a portable PID, or equivalent), but are less than 5 ppm. The specifications on the air purifying respirator (APR) filters used must be appropriate for contaminants identified or expected to be encountered. Level C PPE shall be donned when the identified contaminants have adequate warning properties and criteria for using APR have been met. Level C PPE consists of:

- chemical resistant or coated Tyvek* coveralls;
- steel-toe work boots;
- chemical resistant over boots or disposable boot covers;

^{*}Tyvek shall not be worn when sampling for PFAS.



- disposable inner gloves (surgical gloves);
- disposable outer gloves;
- full face APR fitted with organic vapor/dust and mist filters or filters appropriate for the identified or expected contaminants;
- hard hat;
- splash shield, as needed; and,
- ankles/wrists taped with duct tape.

The site safety officer will verify if Level C is appropriate by checking organic vapor concentrations using compound and/or class-specific detector tubes.

4.3 Level B

Level B PPE shall be donned when the contaminants have not been identified and/or the concentrations of unknown measured total organic vapors in the breathing zone exceed 5 ppm (using a portable PID, or equivalent). Level B PPE shall be donned if the Immediately Dangerous to Life and Health (IDLH) of a known contaminant is exceeded. If a contaminant is identified or is expected to be encountered for which the NIOSH and/or OSHA recommend the use of a positive pressure self-contained breathing apparatus (SCBA) when that contaminant is present, Level B PPE shall be donned even though the total organic vapors in the breathing zone may not exceed 5 ppm. Level B shall be donned for confined space entry, and when the atmosphere is oxygen deficient (oxygen less than 19.5%) or potentially oxygen deficient. If Level B PPE is required for a task, at least three people shall be donned in Level B at any one time during that task. PPE shall only be donned at the direction of the site safety officer. Level B PPE consists of:

- supplied air SCBA or airline system with five-minute egress system;
- chemical resistant coveralls;
- steel-toe work boots:
- chemical resistant over boots or disposable boot covers;
- disposable inner gloves;
- disposable outer gloves;
- hard hat; and,
- ankles/wrists taped.

^{*}Tyvek shall not be worn when sampling for PFAS.



The exact PPE ensemble is decided on a site-by-site basis by the PWGC Health and Safety Officer with the intent to provide the most protective and efficient worker PPE.



5.0 CONTINGENCY PLAN

Site personnel must be prepared in the event of an emergency. Emergencies can take many forms: illnesses, injuries, chemical exposure, fires, explosions, spills, leaks, releases of harmful contaminants, or sudden changes in the weather.

Emergency telephone numbers and a map to the hospital (Figure 1) will be posted in the command post. Site personnel should be familiar with the emergency procedures, and the locations of site safety, first aid, and communication equipment.

5.1 Emergency Equipment Onsite

Private telephones: Site personnel.

Two-way radios: Site personnel where necessary.

Emergency Alarms: Onsite vehicle horns*.

First aid kits: Onsite, in vehicles or office.

Fire extinguisher: Onsite, in office or on equipment.

5.2 Emergency Telephone Numbers

•	General Emergencies	911
•	New York City Police	911
•	NYU Langone Hospital Brooklyn	1-718-630-7000
•	NYSDEC Spills Division	1-800-457-7362
•	NYSDEC Hazardous Waste Division	1-718-482-4996
•	NYCDEP	1-212-639-9675
•	NYC Department of Health	1-212-788-4711
•	NYC Fire Department	911
•	National Response Center	1-800-424-8802
•	Poison Control	1-212-764-7667

A copy of this page shall be posted in the office.

^{*} Horns: Air horns will be supplied to personnel at the discretion of the project superintendent or site safety officer.



5.3 Personnel Responsibilities During an Emergency

The project manager is primarily responsible for responding to and correcting any emergency situations. However, in the absence of the project manager, the site safety officer shall act as the project manager's on-site designee and perform the following tasks:

- Take appropriate measures to protect personnel;
- Ensure that appropriate federal, state, and local agencies are informed, and emergency response plans are coordinated. In the event of fire or explosion, the local fire department should be summoned immediately. If toxic materials are released to the air, the local authorities should be informed in order to assess the need for evacuation;
- Ensure appropriate decontamination, treatment, or testing for exposed or injured personnel;
- Determine the cause of incidents and make recommendations to prevent recurrence; and,
- Ensure that all required reports have been prepared.

5.4 Medical Emergencies

A person who becomes ill or injured, first aid will be administered while waiting for an ambulance or paramedics. A Field Accident Report (Appendix E) must be filled out for any injury.

A person transporting an injured/exposed person to a clinic or hospital for treatment will take the directions to the hospital and information on the chemical(s) to which they may have been exposed.

5.5 Fire or Explosion

In the event of a fire or explosion, the local fire department will be summoned immediately. The site safety officer or his designated alternate will advise the fire commander of the location, nature and identification of the hazardous materials on-site. If it is safe to do so, site personnel may:

- use firefighting equipment available on site; or,
- remove or isolate flammable or other hazardous materials that may contribute to the fire.

5.6 Evacuation Routes

Evacuation routes established by work area locations for each site will be reviewed prior to commencing site operations. As the work areas change, the evacuation routes will be altered accordingly, and the new route will be reviewed.



Under extreme emergency conditions, evacuation is to be immediate without regard for equipment. The evacuation signal will be a continuous blast of a vehicle horn, if possible, and/or by verbal/radio communication. When evacuating the site, personnel will follow these instructions:

- Keep upwind of smoke, vapors, or spill location.
- Exit through the decontamination corridor if possible.
- If evacuation through the decontamination corridor is not possible, personnel should remove contaminated clothing once they are in a safe location and leave it near the exclusion zone or in a safe place.
- The site safety officer will conduct a head count to ensure that all personnel have been evacuated safely. The head count will be correlated to the site and/or exclusion zone entry/exit log.
- If emergency site evacuation is necessary, all personnel are to escape the emergency situation and decontaminate to the maximum extent practical.



FIGURES





HEALTH AND SAFETY WORK PLAN

APPENDIX A Site Safety Plan Acknowledgement Form



SITE SAFETY PLAN ACKNOWLEDGMENT FORM

I have been informed and understand the procedures set forth in the HASP and amendments:

Printed Name	Signature	Representing	Date



HEALTH AND SAFETY WORK PLAN

APPENDIX B
Site Safety Plan Amendment Form



SITE SAFETY PLAN AMENDMENT FORM

Site Safety Plan Amendment #		
Site Name:		
Reason for Amendment:		
Alternative Procedures:		
Required Changes in PPE:		
Project Superintendent	Date	
Health & Safety Consultant	Date	
Site Safety Officer	 Date	



HEALTH AND SAFETY WORK PLAN

APPENDIX C
Safety Data Sheets

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

1. IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

1.1 Product Identifier

Material Name : Fuels, diesel, no.2 CAS 68476-34-6

REACH Registration No. : 01-2119475502-40-0005

1.2 Relevant identified uses of the substance or mixture and uses advised against

Product Use : Please refer to Ch16 and/or the annexes for the registered

uses under REACH.

Uses Advised Against : This product must not be used in applications other than those

recommended in Section 1, without first seeking the advice of the supplier. This product is not to be used as a solvent or cleaning agent; for lighting or brightening fires; as a skin

cleanser.

1.3 Details of the Supplier of the safety data sheet

Manufacturer/Supplier : Shell Trading Rotterdam B.V.

Weena 70

3012 CM Rotterdam

Netherlands

Telephone : +31 10 441 5000

Email Contact for Safety Data Sheet

TRsds@shell.com

1.4 Emergency Telephone Number

+44 (0)151 350 4595

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

Regulation (EC) No 1272/2008 (CLP)	
Hazard classes / Hazard categories	Hazard Statement
Flammable liquids, Category 3	H226

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Aspiration hazard, Category 1	H304
Acute toxicity, Category 4; Inhalation	H332
Skin corrosion/irritation, Category 2	H315
Carcinogenicity, Category 2	H351
Specific target organ toxicity - repeated	H373
exposure, Category 2; Blood.; Liver.; Thymus.	
Chronic hazards to the aquatic environment,	H411
Category 2	

67/548/EEC or 1999/45/EC	
Hazard Characteristics	R-phrase(s)
Harmful.; Dangerous for the environment.;	R20; R38; R40; R51/53; R65
Carcinogenic, category 3.; Irritant.	

Classification triggering

components

: Contains fuels, diesel.

2.2 Label Elements

Labeling according to Regulation (EC) No 1272/2008

Symbol(s) :









Signal Words : Danger

CLP Hazard Statements : PHYSICAL HAZARDS:

H226: Flammable liquid and vapour.

HEALTH HAZARDS:

H304: May be fatal if swallowed and enters airways.

H315: Causes skin irritation. H332: Harmful if inhaled.

H351: Suspected of causing cancer.

H373: May cause damage to organs or organ systems through

prolonged or repeated exposure.

ENVIRONMENTAL HAZARDS:

H411: Toxic to aquatic life with long lasting effects.

Version 1.1

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

CLP Precautionary statements

Prevention : P210: Keep away from heat/sparks/open flames/hot surfaces. -

No smoking.

P261: Avoid breathing dust/fume/gas/mist/vapours/spray. P280: Wear protective gloves/protective clothing/eye

protection/face protection.

Response : P301+P310: IF SWALLOWED: Immediately call a POISON

CENTER or doctor/physician. P331: Do NOT induce vomiting.

Disposal: : P501: Dispose of contents and container to appropriate waste

site or reclaimer in accordance with local and national

regulations.

Labeling according to Directive 1999/45/EC / 67/548/EEC

EC Symbols : Xn Harmful.

N Dangerous for the environment.





EC Classification : Harmful. Dangerous for the environment. Carcinogenic,

category 3. Irritant.

EC Risk Phrases : R20 Harmful by inhalation.

R38 Irritating to skin.

R40 Limited evidence of carcinogenic effect.

R51/53 Toxic to aquatic organisms, may cause long-term

adverse effects in the aquatic environment.

R65 Harmful: may cause lung damage if swallowed.

EC Safety Phrases : S2 Keep out of the reach of children.

S24 Avoid contact with skin.

S36/37 Wear suitable protective clothing and gloves. S61 Avoid release to the environment. Refer to special

instructions/safety data sheets.

S62 If swallowed, do not induce vomiting: seek medical advice

immediately and show this container or label.

2.3 Other Hazards

Safety Hazards : May ignite on surfaces at temperatures above auto-ignition

Version 1.1

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

temperature. Vapour in the headspace of tanks and containers may ignite and explode at temperatures exceeding autoignition temperature, where vapour concentrations are within the flammability range. Electrostatic charges may be generated during pumping. Electrostatic discharge may cause fire.

Other Information : This product is intended for use in closed systems only.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substance

CAS No. : 68476-34-6

3.2 Mixtures

Mixture Description : A distillate oil having a minimum viscosity of 32,6 SUS at 37,7

oC (100 oF). Product is not a mixture according to regulation

1907/2006/EC.

Hazardous Components

Classification of components according to Regulation (EC) No 1272/2008

Chemical Name	CAS No.	EINECS	REACH Registration No.	Conc.
Fuels, diesel, no.2	68476-34-6	270-676-1	01-2119475502-40	100,00%

Chemical Name	Hazard Class & Category	Hazard Statement
Fuels, diesel, no.2	Flam. Liq., 3; Asp. Tox., 1; Acute Tox.,	H226; H304; H332; H315;
	4; Skin Corr., 2; Carc., 2; STOT RE, 2;	H351; H373; H411;
	Aquatic Chronic, 2;	

Classification of components according to 67/548/EEC

Chemical Name	CAS No.	EINECS	REACH Registration No.	Symbol(s)	R-phrase(s)	Conc.
Fuels, diesel,	68476-34-6	270-676-1	01-	Xn, N, Xi	R20; R38;	100,00%
no.2			2119475502-		R40; R65;	
			40		R51/53	

Additional Information: Refer to chapter 16 for full text of EC R-phrases.

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

4. FIRST AID MEASURES

4.1 Description of First Aid Measures

Inhalation : Remove to fresh air. If rapid recovery does not occur, transport

to nearest medical facility for additional treatment.

Skin Contact : Remove contaminated clothing. Immediately flush skin with

large amounts of water for at least 15 minutes, and follow by washing with soap and water if available. If redness, swelling, pain and/or blisters occur, transport to the nearest medical

facility for additional treatment.

Eye Contact : Flush eye with copious quantities of water. If persistent

irritation occurs, obtain medical attention.

Ingestion : If swallowed, do not induce vomiting: transport to nearest

medical facility for additional treatment. If vomiting occurs spontaneously, keep head below hips to prevent aspiration. If any of the following delayed signs and symptoms appear within the next 6 hours, transport to the nearest medical facility: fever greater than 101° F (38.3°C), shortness of breath, chest congestion or continued coughing or wheezing. Give nothing

by mouth.

4.2 Most important symptoms and effects, both acute and delayed

If material enters lungs, signs and symptoms may include coughing, choking, wheezing, difficulty in breathing, chest congestion, shortness of breath, and/or fever. The onset of respiratory symptoms may be delayed for several hours after

exposure.

Defatting dermatitis signs and symptoms may include a burning sensation and/or a dried/cracked appearance.

4.3 Indication of any immediate medical attention and special treatment needed

: Treat symptomatically.

5. FIRE FIGHTING MEASURES

Clear fire area of all non-emergency personnel.

5.1 Extinguishing Media : Foam, water spray or fog. Dry chemical powder, carbon

dioxide, sand or earth may be used for small fires only.

Unsuitable Extinguishing

Media

Do not use water in a jet. Simultaneous use of foam and water on the same surface is to be avoided as water destroys the

foam

5.2 Special hazards : Hazardous combustion products may include: A complex

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

arising from the substance or mixture

mixture of airborne solid and liquid particulates and gases (smoke). Carbon monoxide. Oxides of sulphur. Unidentified organic and inorganic compounds. Carbon monoxide may be evolved if incomplete combustion occurs. Will float and can be reignited on surface water. Flammable vapours may be present

even at temperatures below the flash point.

5.3 Advice for firefighters

Wear full protective clothing and self-contained breathing

apparatus.

Additional Advice

Keep adjacent containers cool by spraying with water.

6. ACCIDENTAL RELEASE MEASURES

Avoid contact with spilled or released material. For guidance on selection of personal protective equipment see Chapter 8 of this Material Safety Data Sheet. See Chapter 13 for information on disposal. Observe the relevant local and international regulations. Evacuate the area of all non-essential personnel. Ventilate contaminated area thoroughly.

6.1 Personal Precautions, Protective Equipment and Emergency Procedures 6.2 Environmental Precautions Do not breathe fumes, vapour. Do not operate electrical equipment.

: Shut off leaks, if possible without personal risks. Remove all possible sources of ignition in the surrounding area. Use appropriate containment (of product and fire fighting water) to avoid environmental contamination. Prevent from spreading or entering drains, ditches or rivers by using sand, earth, or other appropriate barriers. Attempt to disperse the vapour or to direct its flow to a safe location for example by using fog sprays. Take precautionary measures against static discharge. Ensure electrical continuity by bonding and grounding (earthing) all equipment.

6.3 Methods and Material for Containment and Clean Up

For large liquid spills (> 1 drum), transfer by mechanical means such as vacuum truck to a salvage tank for recovery or safe disposal. Do not flush away residues with water. Retain as contaminated waste. Allow residues to evaporate or soak up with an appropriate absorbent material and dispose of safely. Remove contaminated soil and dispose of safely.

For small liquid spills (< 1 drum), transfer by mechanical means to a labelled, sealable container for product recovery or safe disposal. Allow residues to evaporate or soak up with an appropriate absorbent material and dispose of safely. Remove contaminated soil and dispose of safely. Shovel into a suitable clearly marked container for disposal or reclamation in

accordance with local regulations.

Additional Advice : Notify authorities if any exposure to the general public or the environment occurs or is likely to occur. Local authorities

6/46

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

should be advised if significant spillages cannot be contained. Maritime spillages should be dealt with using a Shipboard Oil Pollution Emergency Plan (SOPEP), as required by MARPOL Annex 1 Regulation 26.

6.4 Reference to other sections

For guidance on selection of personal protective equipment see Chapter 8 of this Material Safety Data Sheet. For guidance on disposal of spilled material see Chapter 13 of this Material Safety Data Sheet.

7. HANDLING AND STORAGE

General Precautions

: Avoid breathing vapours or contact with material. Only use in well ventilated areas. Wash thoroughly after handling. For guidance on selection of personal protective equipment see Chapter 8 of this Material Safety Data Sheet. Use the information in this data sheet as input to a risk assessment of local circumstances to help determine appropriate controls for safe handling, storage and disposal of this material. Air-dry contaminated clothing in a well-ventilated area before laundering. Properly dispose of any contaminated rags or cleaning materials in order to prevent fires. Prevent spillages. Use local exhaust ventilation if there is risk of inhalation of vapours, mists or aerosols. Never siphon by mouth. Contaminated leather articles including shoes cannot be decontaminated and should be destroyed to prevent reuse. For comprehensive advice on handling, product transfer, storage and tank cleaning refer to the product supplier.

7.1 Precautions for Safe Handling

Avoid inhaling vapour and/or mists. Electrostatic charges may be generated during pumping. Electrostatic discharge may cause fire. Extinguish any naked flames. Do not smoke. Remove ignition sources. Avoid sparks. Earth all equipment. Avoid prolonged or repeated contact with skin. When using do not eat or drink. The vapour is heavier than air, spreads along the ground and distant ignition is possible.

7.2 Conditions for safe storage, including any incompatibilities

Tank storage: Tanks must be specifically designed for use with this product. Bulk storage tanks should be diked (bunded). Locate tanks away from heat and other sources of ignition. Must be stored in a diked (bunded) well-ventilated area, away from sunlight, ignition sources and other sources of heat. The vapour is heavier than air. Beware of accumulation in pits and confined spaces.

Keep in a bunded area with a sealed (low permeability) floor, to provide containment against spillage. Prevent ingress of water.

7.3 Specific end use(s)

Please refer to Ch16 and/or the annexes for the registered uses under REACH.

7/46

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Additional Information : Ensure that all local regulations regarding handling and storage

facilities are followed.

Product Transfer : Avoid splash filling. Wait 2 minutes after tank filling (for tanks

such as those on road tanker vehicles) before opening hatches or manholes. Wait 30 minutes after tank filling (for large storage tanks) before opening hatches or manholes. Keep containers closed when not in use. Do not use compressed air for filling, discharging or handling. Contamination resulting from product transfer may give rise to light hydrocarbon vapour in the headspace of tanks that have previously contained gasoline. This vapour may explode if there is a source of ignition. Partly filled containers present a greater hazard than those that are full, therefore handling, transfer and sampling

activities need special care.

Recommended Materials : For containers, or container linings use mild steel, stainless

steel.

Unsuitable Materials : Some synthetic materials may be unsuitable for containers or

container linings depending on the material specification and intended use. Compatibility should be checked with the

manufacturer.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

If the American Conference of Governmental Industrial Hygienists (ACGIH) value is provided on this document, it is provided for information only.

Read in conjunction with the Exposure Scenario for your specific use contained in the Annex.

8.1 Control Parameters

Occupational Exposure Limits

None established.

Material	Source	Type	ppm	mg/m3	Notation
Fuels, diesel, no.2	ACGIH	TWA(Inhala ble fraction and vapor.)		100 mg/m3	as total hydrocarbons
	ACGIH	SKIN_DES(I nhalable fraction and vapor.)			Can be absorbed through the skin.as total hydrocarbons

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Material	Source	Hazard Designation
Fuels, diesel, no.2	ACGIH	Confirmed animal carcinogen
		with unknown relevance to
		humans.

Biological Exposure Index (BEI)

No biological limit allocated.

Derived No Effect Levels (DNEL/DMEL) Table

Component	Exposure Route	Exposure Type	Application Area	Value
		(long/short)		
Fuels, diesel	Inhalation	acute, systemic effects	Worker	4300 mg/m3/15 mins (aerosol)
	Dermal	long term, systemic effects	Worker	2,9 mg/kg 8h
	Inhalation	long term, systemic effects	Worker	68 mg/m3/8h (aerosol)
	Inhalation	acute, systemic effects	Consumer	2600 mg/m3/15 mins (aerosol)
	Dermal	long term, systemic effects	Consumer	1,3 mg/kg 24h
	Inhalation	long term, local effects	Consumer	20 mg/m3/24h (aerosol)

PNEC related information

Substance is a hydrocarbon with a complex, unknown or variable composition. Conventional methods of deriving PNECs are not appropriate and it is not possible to identify a

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

single representative PNEC for such substances.

8.2 Exposure Controls General Information

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Select controls based on a risk assessment of local circumstances. Appropriate measures include: Use sealed systems as far as possible. Adequate ventilation to control airborne concentrations below the exposure guidelines/limits. Local exhaust ventilation is recommended. Eye washes and showers for emergency use.

Do not ingest. If swallowed then seek immediate medical assistance.

Occupational Exposure Controls

Personal Protective

Equipment

: Personal protective equipment (PPE) should meet

recommended national standards. Check with PPE suppliers.

Eye Protection : Chemical splash goggles (chemical monogoggles).

Approved to EU Standard EN166.

Hand Protection : Personal hygiene is a key element of effective hand care.

Gloves must only be worn on clean hands. After using gloves, hands should be washed and dried thoroughly. Application of a non-perfumed moisturizer is recommended. Suitability and durability of a glove is dependent on usage, e.g. frequency and duration of contact, chemical resistance of glove material, glove thickness, dexterity. Always seek advice from glove suppliers. Contaminated gloves should be replaced. Select gloves tested to a relevant standard (e.g. Europe EN374 for

chemical resistance and EN407 for heat resistance).

Body protection : Chemical resistant gloves/gauntlets, boots, and apron (where

risk of splashing).

Respiratory Protection: If engineering controls do not maintain airborne concentrations

to a level which is adequate to protect worker health, select respiratory protection equipment suitable for the specific conditions of use and meeting relevant legislation. Check with respiratory protective equipment suppliers. Where air-filtering respirators are unsuitable (e.g. airborne concentrations are high, risk of oxygen deficiency, confined space) use appropriate positive pressure breathing apparatus. All respiratory protection equipment and use must be in accordance with local regulations. Select a filter suitable for organic gases and vapours [boiling point >65 °C (149 °F)]

Version 1.1

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

meeting EN14387.

Thermal Hazards : Not applicable.

Monitoring Methods : Monitoring of the concentration of substances in the breathing

zone of workers or in the general workplace may be required to confirm compliance with an OEL and adequacy of exposure controls. For some substances biological monitoring may also

be appropriate.

Environmental Exposure Controls

Environmental exposure

control measures

: Local guidelines on emission limits for volatile substances must be observed for the discharge of exhaust air containing vapour.

Consumer Exposure Controls

Exposure Control

Measures for Consumers

If repeated and/or prolonged skin exposure to the substance is likely, then wear suitable gloves tested to EN374 and provide

employee skin care programmes.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Appearance : Clear amber. Liquid.
Odour : Hydrocarbon.
Odour threshold : Data not available
pH : Not applicable.

Initial Boiling Point and : ca. 174 - 384 °C / 345 - 723 °F

Boiling Range

Melting / freezing point : Data not available Pour point : -25 - -15 °C / -13 - 5 °F Flash point : > 55 °C / 131 °F

Upper / lower Flammability : 0,6 - 7,5 %(V)

or Explosion limits

Ignition temperature : 225 - 230 °C / 437 - 446 °F

Vapour pressure : 4 hPa

Specific gravity : Data not available

Density : 0,809 - 0,875 g/cm3 at 15 °C / 59 °F

Bulk density : Data not available

Water solubility : Negligible.

Solubility in other solvents : Data not available

n-octanol/water partition

coefficient (log Pow)

: 2,66 - 6,0

Dynamic viscosity : Data not available

Kinematic viscosity : 1,5 - 4,5 mm2/s at 40 °C / 104 °F

11/46

Version 1.1

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Vapour density (air=1) : Data not available Evaporation rate (nBuAc=1) : Data not available Flammability : Data not available

9.2 Other Information

Other Information : Data not available

10. STABILITY AND REACTIVITY

10.1 Reactivity : Stable under normal conditions of use.

10.2 Chemical stability : Stable under normal conditions of use.

10.3 Possibility of

Hazardous Reactions

10.4 Conditions to Avoid

10.5 Incompatible

Materials

10.6 Hazardous

Decomposition Products

Data not available

: Avoid heat, sparks, open flames and other ignition sources.

: Strong oxidising agents.

: Hazardous decomposition products are not expected to form during normal storage. Thermal decomposition is highly

dependent on conditions. A complex mixture of airborne solids, liquids and gases, including carbon monoxide, carbon dioxide and other organic compounds will be evolved when this material undergoes combustion or thermal or oxidative

degradation.

11. TOXICOLOGICAL INFORMATION

11.1 Information on Toxicological effects

Basis for Assessment : Information given is based on product data, a knowledge of the

components and the toxicology of similar products.

Likely Routes of : Skin and eye contact are the primary routes of exposure

Exposure

although exposure may occur through inhalation or following

accidental ingestion.

Acute Oral Toxicity : Low toxicity: LD50 > 5000 mg/kg , Rat

Acute Dermal Toxicity : LD50 >2000 mg/kg , Rabbit

Acute Inhalation Toxicity : Harmful if inhaled. LC50 > 1.0 - <= 5.0 mg/l / 4 h. Rat

Skin corrosion/irritation : Irritating to skin.

Serious eye : Expected to be slightly irritating. damage/irritation

Respiratory Irritation: Inhalation of vapours or mists may cause irritation to the

respiratory system.

12/46

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Respiratory or skin

sensitisation **Aspiration Hazard** : Not expected to be a sensitiser.

: Aspiration into the lungs when swallowed or vomited may

cause chemical pneumonitis which can be fatal.

Germ cell mutagenicity

Carcinogenicity

Positive in in-vitro, but negative in in-vivo mutagenicity assays. Limited evidence of carcinogenic effect. Repeated skin contact

has resulted in irritation and skin cancer in animals.

Reproductive and **Developmental Toxicity** Specific target organ toxicity - single exposure

Specific target organ toxicity - repeated

exposure

Not expected to be a developmental toxicant. Not expected to

impair fertility. Not classified.

May cause damage to organs or organ systems through prolonged or repeated exposure. Blood. Thymus. Liver.

12. ECOLOGICAL INFORMATION

Basis for Assessment : Information given is based on a knowledge of the components

and the ecotoxicology of similar products.

12.1 Toxicity

Acute Toxicity : Expected to be toxic: LL/EL/IL50 1-10 mg/l LL/EL50 expressed

as the nominal amount of product required to prepare aqueous

test extract.

Fish Expected to be toxic: LL/EL/IL50 1-10 mg/l Expected to be toxic: LL/EL/IL50 1-10 mg/l Aquatic crustacea Algae/aguatic plants Expected to be toxic: LL/EL/IL50 1-10 mg/l

Chronic Toxicity

Fish

Microorganisms

NOEC/NOEL expected to be > 0.01 - <= 0.1 mg/l (based on

: Expected to be practically non toxic: LL/EL/IL50 > 100 mg/l

modeled data)

NOEC/NOEL expected to be > 0.1 - <= 1.0 mg/l (based on Aquatic crustacea

modeled data)

12.2 Persistence and

degradability

Readily biodegradable. Persistent per IMO criteria. International Oil Pollution Compensation (IOPC) Fund definition: "A non-persistent oil is oil, which, at the time of shipment, consists of hydrocarbon fractions, (a) at least 50% of which, by volume, distills at a temperature of 340°C (645°F) and (b) at least 95% of which, by volume, distils at a

temperature of 370°C (700°F) when tested by the ASTM Method D-86/78 or any subsequent revision thereof."

12.3 Bioaccumulative

Potential

Contains constituents with the potential to bioaccumulate.

Version 1.1

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

12.4 Mobility : Partly evaporates from water or soil surfaces, but a significant

> proportion will remain after one day. If product enters soil, one or more constituents will be mobile and may contaminate groundwater. Floats on water. Large volumes may penetrate

soil and could contaminate groundwater.

12.5 Result of PBT and vPvB assesment

: The substance does not fulfill all screening criteria for persistence, bioaccumulation and toxicity and hence is not

considered to be PBT or vPvB.

12.6 Other Adverse

Effects

Films formed on water may affect oxygen transfer and damage

organisms.

13. DISPOSAL CONSIDERATIONS

13.1 Waste Treatment Methods

Material Disposal : Recover or recycle if possible. It is the responsibility of the

> waste generator to determine the toxicity and physical properties of the material generated to determine the proper waste classification and disposal methods in compliance with applicable regulations. Do not dispose into the environment, in drains or in water courses. Do not dispose of tank water bottoms by allowing them to drain into the ground. This will result in soil and groundwater contamination. Waste arising from a spillage or tank cleaning should be disposed of in accordance with prevailing regulations, preferably to a recognised collector or contractor. The competence of the collector or contractor should be established beforehand. : EU Waste Disposal Code (EWC): 13 07 01 fuel oil and diesel.

Local Legislation

Disposal should be in accordance with applicable regional, national, and local laws and regulations. Local regulations may be more stringent than regional or national requirements and

must be complied with.

14. TRANSPORT INFORMATION

Land transport (ADR/RID):

ADR

14.1 UN number 1202 14.2 UN proper shipping GAS OIL

name

14/46

000000022961 MSDS NL

Version 1.1

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

14.3 Transport hazard : 3

class(es)

14.4 Packing group Ш Danger label (primary risk) 3

14.5 Environmental **Environmentally Hazardous**

hazards

14.6 Special precautions for :

user

Special Precautions: Refer to Chapter 7, Handling & Storage, for special precautions which a user needs to be aware of or

needs to comply with in connection with transport.

RID

1202 14.1 UN number 14.2 UN proper shipping **GAS OIL**

14.3 Transport hazard 3

class(es)

14.4 Packing group Ш Danger label (primary risk) 3

14.5 Environmental **Environmentally Hazardous**

hazards

14.6 Special precautions for

user

needs to comply with in connection with transport.

Special Precautions: Refer to Chapter 7, Handling & Storage,

for special precautions which a user needs to be aware of or

Inland waterways transport (ADN):

14.1 UN number 1202 14.2 UN proper shipping GAS OIL

name

14.3 Transport hazard 3

class(es)

14.4 Packing group Ш Danger label (primary risk) 3 Danger label (subsidiary N2 risk)

14.5 Environmental

hazards

Environmentally Hazardous

14.6 Special precautions for

user

Special Precautions: Refer to Chapter 7, Handling & Storage, for special precautions which a user needs to be aware of or

needs to comply with in connection with transport.

Sea transport (IMDG Code):

14.1 UN number UN 1202 14.2 UN proper shipping **GAS OIL**

name

15/46

000000022961 MSDS NL

Version 1.1

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

14.3 Transport hazard :

class(es)

14.4 Packing group : III 14.5 Marine pollutant : Yes

3

Ш

14.6 Special precautions for :

user

Special Precautions: Refer to Chapter 7, Handling & Storage, for special precautions which a user needs to be aware of or

needs to comply with in connection with transport.

Air transport (IATA):

14.1 UN number : 1202 14.2 UN proper shipping : Gas oil

name

14.3 Transport hazard : 3

class(es)

14.4 Packing group :

14.6 Special precautions for

user

Special Precautions: Refer to Chapter 7, Handling & Storage, for special precautions which a user needs to be aware of or

needs to comply with in connection with transport.

14.7 Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Pollution Category : Not applicable.
Ship Type : Not applicable.
Product Name : Not applicable.
Special Precaution : Not applicable.

15. REGULATORY INFORMATION

The regulatory information is not intended to be comprehensive. Other regulations may apply to this material

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

Other regulatory Information

15.2 Chemical Safety

: A Chemical Safety Assessment was performed for this

Assessment

substance.

16. OTHER INFORMATION

R-phrase(s)

16/46

Version 1.1

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

R20 Harmful by inhalation. R38 Irritating to skin.

R40 Limited evidence of carcinogenic effect.

R51/53 Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic

environment.

R65 Harmful: may cause lung damage if swallowed.

CLP Hazard Statements

H226 Flammable liquid and vapour.

H304 May be fatal if swallowed and enters airways.

H315 Causes skin irritation. H332 Harmful if inhaled.

H351 Suspected of causing cancer.

H373 May cause damage to organs or organ systems through prolonged or repeated

exposure.

H411 Toxic to aquatic life with long lasting effects.

Identified Uses according to the Use Descriptor System

Uses - Worker

Title : Manufacture of substance

- Industrial

Uses - Worker

Title : Use as an intermediate

- Industrial

Uses - Worker

Title : Distribution of substance

- Industrial

Uses - Worker

Title : Formulation & (re)packing of substances and mixtures

- Industrial

Uses - Worker

Title : Use as a fuel

- Industrial

Uses - Worker

Title : Use as a fuel

- Professional

Uses - Consumer

17/46

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Title : Use as a fuel

- Consumer

Recommended Restrictions on Use (Advice Against) This product must not be used in applications other than those recommended in Section 1, without first seeking the advice of the supplier. This product is not to be used as a solvent or cleaning agent; for lighting or brightening fires; as a skin cleanser.

Additional Information

This document contains important information to ensure the safe storage, handling and use of this product. The information in this document should be brought to the attention of the person in your organisation responsible for advising on safety matters.

Other Information

Further Information : This product is intended for use in closed systems only.

MSDS Distribution : The information in this document should be made available to

all who may handle the product.

MSDS Version Number : 1.1

MSDS Effective Date : 01.08.2012

MSDS Revisions : A vertical bar (|) in the left margin indicates an amendment

from the previous version.

MSDS Regulation Disclaimer

Regulation 1907/2006/EC

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property

of the product.

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Exposure Scenario - Worker

Exposure occitatio - Worke	Exposure Scenario - Worker		
Gas Oils (vacuum,hydrocracked and distillate fuels)			
SECTION 1	EXPOSURE SCENARIO TITLE		
Title	Manufacture of substance - Industrial		
Use Descriptor	Sector of Use: SU 3, SU8, SU9 Process Categories: PROC 1, PROC 2, PROC 3, PROC 4, PROC 8a, PROC 8b, PROC 15 Environmental Release Categories: ERC 1, ERC 4, ESVOC SpERC 1.1.v1		
Scope of process	Manufacture of the substance or use as a process chemical or extraction agent. Includes recycling/ recovery, material transfers, storage, maintenance and loading (including marine vessel/barge, road/rail car and bulk container), sampling and associated laboratory activities.		

SECTION 2	OPERATIONAL CONDITIONS AND RISK MANAGEMENT	
	MEASURES	

Section 2.1	Control of Worker Exposure	
Product Characteristics		
Physical form of product	Liquid, vapour pressure < 0.5 kPa at STP	
Concentration of substance in product.	Covers use of substance/product up to 100% (unless stated differently).	
Frequency and Duration of Use		
Covers daily exposures up to 8 hours (unless stated differently).		
Other Operational Conditions affecting Exposure		
Operation is carried out at elevated temperature (> 20°C above ambient temperature). Assumes a good basic standard of occupational hygiene has been implemented.		

Contributing Scenarios	Risk Management Measures
applicable to all activities.	Control any potential exposure using measures such as contained systems, properly designed and maintained facilities and a good standard of general ventilation. Drain down systems and transfer lines prior to breaking containment. Drain down and flush equipment where possible prior to maintenance. Where there is potential for exposure: Ensure relevant staff

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

	are informed of exposure potential and aware of basic actions to minimise exposures; ensure suitable personal protective equipment is available; clear up spills and dispose of waste in accordance with regulatory requirements; monitor effectiveness of control measures; provide regular health surveillance as appropriate; identify and implement corrective actions.
General measures (skin irritants).	Avoid direct skin contact with product. Identify potential areas for indirect skin contact. Wear gloves (tested to EN374) if hand contact with substance likely. Clean up contamination/spills as soon as they occur. Wash off any skin contamination immediately. Provide basic employee training to prevent / minimise exposures and to report any skin problems that may develop.
General exposures (closed systems).	No other specific measures identified.
General exposures (open systems).	Wear suitable gloves tested to EN374.
Process sampling.	No other specific measures identified.
Bulk closed loading and unloading.	Wear suitable gloves tested to EN374.
Bulk open loading and unloading.	Wear suitable gloves tested to EN374.
Equipment cleaning and maintenance.	Drain down system prior to equipment break-in or maintenance. Wear chemically resistant gloves (tested to EN374) in combination with 'basic' employee training.
Laboratory activities.	No other specific measures identified.
Bulk product storage.	Store substance within a closed system.
t-	

Section 2.2	ection 2.2 Control of Environmental Exposure		
Substance is complex UVCB.			
Predominantly hydrophobic.	Predominantly hydrophobic.		
Amounts Used			
Fraction of EU tonnage used in region: 0,1		0,1	
Regional use tonnage (tonnes/year):		2,8E+07	
Fraction of Regional tonnage used locally:		0,021	
Annual site tonnage (tonnes/year):		6,0E+05	

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Maximum daily site tonnage (kg/day):	2,0E+06
Frequency and Duration of Use	
Continuous release.	
Emission Days (days/year):	300
Environmental factors not influenced by risk management	•
Local freshwater dilution factor:	10
Local marine water dilution factor:	100
Other Operational Conditions affecting Environmental Exposure	•
Release fraction to air from process (initial release prior to RMM):	1,0E-02
Release fraction to wastewater from process (initial release prior to RMM):	3,0E-05
Release fraction to soil from process (initial release prior to RMM):	1,0E-04
Technical conditions and measures at process level (source) to pr	event release
Common practices vary across sites thus conservative process release estimates used.	
Technical onsite conditions and measures to reduce or limit disch	arges, air
emissions and releases to soil	goo,
Risk from environmental exposure is driven by freshwater sediment.	
Prevent discharge of undissolved substance to or recover from onsite	
wastewater.	
Treat air emission to provide a typical removal efficiency of (%)	90
Treat onsite wastewater (prior to receiving water discharge) to provide	90.3
the required removal efficiency of >= (%)	
If discharging to domestic sewage treatment plant, provide the	0
required onsite wastewater removal efficiency of (%)	
Prevent discharge of undissolved substance to or recover from onsite	
wastewater.	
Organisational measures to prevent/limit release from site	
Do not apply industrial sludge to natural soils.	
Sludge should be incinerated, contained or reclaimed.	
Conditions and Measures related to municipal sewage treatment p	
Estimated substance removal from wastewater via domestic sewage treatment (%)	94,1
Total efficiency of removal from wastewater after onsite and offsite	94,1
(domestic treatment plant) RMMs (%)	0 1, 1
Maximum allowable site tonnage (MSafe) based on release following	3,3E+06
total wastewater treatment removal (kg/d)	-,
Assumed domestic sewage treatment plant flow (m3/d)	10.000
Conditions and Measures related to external treatment of waste for	
During manufacturing no waste of the substance is generated.	1
Conditions and measures related to external recovery of waste	

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

During manufacturing no waste of the substance is generated.

SECTION 3 EXPOSURE ESTIMATION

Section 3.1 - Health

The ECETOC TRA tool has been used to estimate workplace exposures unless otherwise indicated.

Section 3.2 - Environment

The Hydrocarbon Block Method has been used to calculate environmental exposure with the Petrorisk model.

SECTION 4 GUIDANCE TO CHECK COMPLIANCE WITH THE EXPOSURE SCENARIO

Section 4.1 - Health

Predicted exposures are not expected to exceed the DN(M)EL when the Risk Management Measures/Operational Conditions outlined in Section 2 are implemented.

Where other Risk Management Measures/Operational Conditions are adopted, then users should ensure that risks are managed to at least equivalent levels.

Available hazard data do not enable the derivation of a DNEL for dermal irritant effects.

Risk Management Measures are based on qualitative risk characterisation.

Section 4.2 -Environment

Guidance is based on assumed operating conditions which may not be applicable to all sites; thus, scaling may be necessary to define appropriate site-specific risk management measures

Required removal efficiency for wastewater can be achieved using onsite/offsite technologies, either alone or in combination.

Required removal efficiency for air can be achieved using on-site technologies, either alone or in combination.

Further details on scaling and control technologies are provided in SpERC factsheet (http://cefic.org).

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Exposure Scenario - Worker

Exposure oceriano - Worke	Exposure Scenario - worker	
Gas Oils(vacuum,hydrocracked and distillate fuels)		
SECTION 1	EXPOSURE SCENARIO TITLE	
Title	Use as an intermediate - Industrial	
Use Descriptor	Sector of Use: SU 3, SU8, SU9 Process Categories: PROC 1, PROC 2, PROC 3, PROC 4, PROC 8a, PROC 8b, PROC 15 Environmental Release Categories: ERC 6A, ESVOC SpERC 6.1a.v1	
Scope of process	Use of substance as an intermediate (not related to Strictly Controlled Conditions). Includes recycling/ recovery, material transfers, storage, sampling, associated laboratory activities, maintenance and loading (including marine vessel/barge, road/rail car and bulk container).	

SECTION 2	OPERATIONAL CONDITIONS AND RISK MANAGEMENT
	MEASURES

Section 2.1	Control of Worker Exposure	
Product Characteristics		
Physical form of product	Liquid, vapour pressure < 0.5 kPa at STP	
Concentration of substance in product.	Covers use of substance/product up to 100% (unless stated differently).	
Frequency and Duration of Use		
Covers daily exposures up to 8 hours (unless stated differently).		
Other Operational Conditions affecting Exposure		
Operation is carried out at elevated temperature (> 20°C above ambient temperature). Assumes a good basic standard of occupational hygiene has been implemented.		

Contributing Scenarios	Risk Management Measures
General measures applicable to all activities.	Control any potential exposure using measures such as contained systems, properly designed and maintained facilities and a good standard of general ventilation. Drain down systems and transfer lines prior to breaking containment. Drain down and flush equipment where possible prior to maintenance.
	Where there is potential for exposure: Ensure relevant staff

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

	are informed of exposure potential and aware of basic actions to minimise exposures; ensure suitable personal protective equipment is available; clear up spills and dispose of waste in accordance with regulatory requirements; monitor effectiveness of control measures; provide regular health surveillance as appropriate; identify and implement corrective actions.
General measures (skin irritants).	Avoid direct skin contact with product. Identify potential areas for indirect skin contact. Wear gloves (tested to EN374) if hand contact with substance likely. Clean up contamination/spills as soon as they occur. Wash off any skin contamination immediately. Provide basic employee training to prevent / minimise exposures and to report any skin problems that may develop.
General exposures (closed systems).	No other specific measures identified.
General exposures (open systems).	Wear suitable gloves tested to EN374.
Process sampling.	No other specific measures identified.
Bulk closed loading and unloading.	Wear suitable gloves tested to EN374.
Bulk open loading and unloading.	Wear suitable gloves tested to EN374.
Equipment cleaning and maintenance.	Drain down system prior to equipment break-in or maintenance. Wear chemically resistant gloves (tested to EN374) in combination with 'basic' employee training.
Laboratory activities.	No other specific measures identified.
Bulk product storage.	Store substance within a closed system.
	1

Section 2.2	Section 2.2 Control of Environmental Exposure		
Substance is complex UVCB.			
Predominantly hydrophobic.	Predominantly hydrophobic.		
Amounts Used			
Fraction of EU tonnage used in region: 0,1		0,1	
Regional use tonnage (tonnes/year):		3,5E+05	
Fraction of Regional tonnage used locally:		0,043	
Annual site tonnage (tonnes/year):		1,5E+04	

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Maximum daily site tonnage (kg/day):	5,0E+04
Frequency and Duration of Use	
Continuous release.	
Emission Days (days/year):	300
Environmental factors not influenced by risk management	
Local freshwater dilution factor:	10
Local marine water dilution factor:	100
Other Operational Conditions affecting Environmental Exposure	
Release fraction to air from process (initial release prior to RMM):	1,0E-03
Release fraction to wastewater from process (initial release prior to RMM):	3,0E-05
Release fraction to soil from process (initial release prior to RMM):	1,0E-03
Technical conditions and measures at process level (source) to pr	
Common practices vary across sites thus conservative process	
release estimates used.	
Technical onsite conditions and measures to reduce or limit disch	arges, air
emissions and releases to soil	
Risk from environmental exposure is driven by freshwater sediment.	
Prevent discharge of undissolved substance to or recover from onsite	
wastewater.	
If discharging to domestic sewage treatment plant, no secondary	
wastewater treatment required.	
Treat air emission to provide a typical removal efficiency of (%)	80
Treat onsite wastewater (prior to receiving water discharge) to provide the required removal efficiency of >= (%)	51,7
If discharging to domestic sewage treatment plant, provide the	0
required onsite wastewater removal efficiency of (%)	
Prevent discharge of undissolved substance to or recover from onsite	
wastewater.	
Organisational measures to prevent/limit release from site	
Do not apply industrial sludge to natural soils.	
Sludge should be incinerated, contained or reclaimed.	
Conditions and Measures related to municipal sewage treatment p	lant
Estimated substance removal from wastewater via domestic sewage	94,1
treatment (%)	
Total efficiency of removal from wastewater after onsite and offsite	94,1
(domestic treatment plant) RMMs (%)	,
Maximum allowable site tonnage (MSafe) based on release following	4,1E+05
total wastewater treatment removal (kg/d)	
Assumed domestic sewage treatment plant flow (m3/d)	2.000
Conditions and Measures related to external treatment of waste for	I .
This substance is consumed during use and no waste of substance is g	
5	

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Conditions and measures related to external recovery of waste

This substance is consumed during use and no waste of substance is generated.

SECTION 3 EXPOSURE ESTIMATION

Section 3.1 - Health

The ECETOC TRA tool has been used to estimate workplace exposures unless otherwise indicated.

Section 3.2 - Environment

The Hydrocarbon Block Method has been used to calculate environmental exposure with the Petrorisk model.

SECTION 4 GUIDANCE TO CHECK COMPLIANCE WITH THE EXPOSURE SCENARIO

Section 4.1 - Health

Predicted exposures are not expected to exceed the DN(M)EL when the Risk Management Measures/Operational Conditions outlined in Section 2 are implemented.

Where other Risk Management Measures/Operational Conditions are adopted, then users should ensure that risks are managed to at least equivalent levels.

Available hazard data do not enable the derivation of a DNEL for dermal irritant effects. Risk Management Measures are based on qualitative risk characterisation.

Section 4.2 -Environment

Guidance is based on assumed operating conditions which may not be applicable to all sites; thus, scaling may be necessary to define appropriate site-specific risk management measures.

Required removal efficiency for wastewater can be achieved using onsite/offsite technologies, either alone or in combination.

Required removal efficiency for air can be achieved using on-site technologies, either alone or in combination.

Further details on scaling and control technologies are provided in SpERC factsheet (http://cefic.org).

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Exposure Scenario - Worker

Exposure Scenario - Worke	Exposure Scenario - worker		
Gas Oils(vacuum,hydrocracked and distillate fuels)			
SECTION 1	EXPOSURE SCENARIO TITLE		
Title	Distribution of substance - Industrial		
Use Descriptor	Sector of Use: SU 3 Process Categories: PROC 1, PROC 2, PROC 3, PROC 4, PROC 8a, PROC 8b, PROC 9, PROC 15 Environmental Release Categories: ERC 1, ERC 2, ERC 3, ERC 4, ERC 5, ERC 6A, ERC 6B, ERC 6C, ERC 6D, ERC 7, ESVOC SpERC 1.1b.v1		
Scope of process	Loading (including marine vessel/barge, rail/road car and IBC loading) and repacking (including drums and small packs) of substance, including its sampling, storage, unloading distribution and associated laboratory activities.		

SECTION 2	OPERATIONAL CONDITIONS AND RISK MANAGEMENT
	MEASURES

Section 2.1	Control of Worker Exposure		
Product Characteristics			
Physical form of product	Liquid, vapour pressure < 0.5 kPa at STP		
Concentration of substance	Covers use of substance/product up to 100% (unless stated		
in product.	differently).,		
Frequency and Duration of Use			
Covers daily exposures up to 8 hours (unless stated differently).			
Other Operational Conditions affecting Exposure			
Assumes use at not more than 20°C above ambient temperature (unless stated differently).			
Assumes a good basic standard of occupational hygiene has been implemented.			

Contributing Scenarios	Risk Management Measures
General measures applicable to all activities.	Control any potential exposure using measures such as contained systems, properly designed and maintained facilities and a good standard of general ventilation. Drain down systems and transfer lines prior to breaking containment. Drain down and flush equipment where possible prior to maintenance. Where there is potential for exposure: Ensure relevant staff

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

	are informed of exposure potential and aware of basic actions to minimise exposures; ensure suitable personal protective equipment is available; clear up spills and dispose of waste in accordance with regulatory requirements; monitor effectiveness of control measures; provide regular health surveillance as appropriate; identify and implement corrective actions.
General measures (skin irritants).	Avoid direct skin contact with product. Identify potential areas for indirect skin contact. Wear gloves (tested to EN374) if hand contact with substance likely. Clean up contamination/spills as soon as they occur. Wash off any skin contamination immediately. Provide basic employee training to prevent / minimise exposures and to report any skin problems that may develop.
General exposures (closed systems).	No other specific measures identified.
General exposures (open systems).	Wear suitable gloves tested to EN374.
Process sampling.	No other specific measures identified.
Laboratory activities.	No other specific measures identified.
Bulk closed loading and unloading.	Wear suitable gloves tested to EN374.
Bulk open loading and unloading.	Wear suitable gloves tested to EN374.
Drum and small package filling.	Wear suitable gloves tested to EN374.
Equipment cleaning and maintenance.	Drain down system prior to equipment break-in or maintenance. Wear chemically resistant gloves (tested to EN374) in combination with 'basic' employee training.
Storage.	Store substance within a closed system.

Section 2.2	Control of Environmental Exposure	
Substance is complex UVCB.		
Predominantly hydrophobic.		
Amounts Used		
Fraction of EU tonnage used	in region:	0,1
Regional use tonnage (tonnes	s/year):	2,8E+07

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

	I
Fraction of Regional tonnage used locally:	0,002
Annual site tonnage (tonnes/year):	5,6E+04
Maximum daily site tonnage (kg/day):	1,9E+05
Frequency and Duration of Use	
Continuous release.	
Emission Days (days/year):	300
Environmental factors not influenced by risk management	
Local freshwater dilution factor:	10
Local marine water dilution factor:	100
Other Operational Conditions affecting Environmental Exposure	
Release fraction to air from process (initial release prior to RMM):	1,0E-03
Release fraction to wastewater from process (initial release prior to RMM):	1,0E-06
Release fraction to soil from process (initial release prior to RMM):	1,0E-05
Technical conditions and measures at process level (source) to pro	event release
Common practices vary across sites thus conservative process release estimates used.	
Technical onsite conditions and measures to reduce or limit discha-	arges, air
emissions and releases to soil	
Risk from environmental exposure is driven by freshwater sediment.	
Prevent discharge of undissolved substance to or recover from onsite	
wastewater.	
If discharging to domestic sewage treatment plant, no secondary	
wastewater treatment required.	
Treat air emission to provide a typical removal efficiency of (%)	90
Treat onsite wastewater (prior to receiving water discharge) to provide the required removal efficiency of >= (%)	9,6
If discharging to domestic sewage treatment plant, provide the	0
required onsite wastewater removal efficiency of (%)	
Prevent discharge of undissolved substance to or recover from onsite	
wastewater.	
Organisational measures to prevent/limit release from site	
Do not apply industrial sludge to natural soils.	
Sludge should be incinerated, contained or reclaimed.	
Conditions and Measures related to municipal sewage treatment p	lant
Estimated substance removal from wastewater via domestic sewage treatment (%)	94,1
Total efficiency of removal from wastewater after onsite and offsite (domestic treatment plant) RMMs (%)	94,1
Maximum allowable site tonnage (MSafe) based on release following	2,9E+06
total wastewater treatment removal (kg/d)	2.000
Assumed domestic sewage treatment plant flow (m3/d)	2.000

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Conditions and Measures related to external treatment of waste for disposal

External treatment and disposal of waste should comply with applicable local and/or regional regulations.

Conditions and measures related to external recovery of waste

External recovery and recycling of waste should comply with applicable local and/or regional regulations.

SECTION 3 EXPOSURE ESTIMATION

Section 3.1 - Health

The ECETOC TRA tool has been used to estimate workplace exposures unless otherwise indicated.

Section 3.2 - Environment

The Hydrocarbon Block Method has been used to calculate environmental exposure with the Petrorisk model.

SECTION 4 GUIDANCE TO CHECK COMPLIANCE WITH THE EXPOSURE SCENARIO

Section 4.1 - Health

Predicted exposures are not expected to exceed the DN(M)EL when the Risk Management Measures/Operational Conditions outlined in Section 2 are implemented.

Where other Risk Management Measures/Operational Conditions are adopted, then users should ensure that risks are managed to at least equivalent levels.

Available hazard data do not enable the derivation of a DNEL for dermal irritant effects.

Risk Management Measures are based on qualitative risk characterisation.

Section 4.2 -Environment

Guidance is based on assumed operating conditions which may not be applicable to all sites; thus, scaling may be necessary to define appropriate site-specific risk management measures.

Required removal efficiency for wastewater can be achieved using onsite/offsite technologies, either alone or in combination.

Required removal efficiency for air can be achieved using on-site technologies, either alone or in combination.

Further details on scaling and control technologies are provided in SpERC factsheet (http://cefic.org).

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Exposure Scenario - Worker

Exposure Scenario - Worker	
Gas Oils(vacuum,hydrocracked and distillate fuels)	
SECTION 1	EXPOSURE SCENARIO TITLE
Title	Formulation & (re)packing of substances and mixtures - Industrial
Use Descriptor	Sector of Use: SU 3, SU 10 Process Categories: PROC 1, PROC 2, PROC 3, PROC 4, PROC 5, PROC 8a, PROC 8b, PROC 9, PROC 14, PROC 15 Environmental Release Categories: ERC 2, ESVOC SpERC 2.2.v1
Scope of process	Formulation, packing and re-packing of the substance and its mixtures in batch or continuous operations, including storage, materials transfers, mixing, tabletting, compression, pelletisation, extrusion, large and small scale packing, sampling, maintenance and associated laboratory activities.

SECTION 2	OPERATIONAL CONDITIONS AND RISK MANAGEMENT
	MEASURES

Section 2.1	Control of Worker Exposure	
Product Characteristics		
Physical form of product	Liquid, vapour pressure < 0.5 kPa at STF	0
Concentration of substance in product.	Covers use of substance/product up to 1 differently).,	00% (unless stated
Frequency and Duration of	Use	
Covers daily exposures up to	8 hours (unless stated differently).	
Other Operational Conditio	ns affecting Exposure	
	in 20°C above ambient temperature (unles ard of occupational hygiene has been impl	

Contributing Scenarios	Risk Management Measures
General measures applicable to all activities.	Control any potential exposure using measures such as contained systems, properly designed and maintained facilities and a good standard of general ventilation. Drain down systems and transfer lines prior to breaking containment. Drain down and flush equipment where possible prior to maintenance.

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

	Where there is potential for exposure: Ensure relevant staff are informed of exposure potential and aware of basic actions to minimise exposures; ensure suitable personal protective equipment is available; clear up spills and dispose of waste in accordance with regulatory requirements; monitor effectiveness of control measures; provide regular health surveillance as appropriate; identify and implement corrective actions.
General measures (skin irritants).	Avoid direct skin contact with product. Identify potential areas for indirect skin contact. Wear gloves (tested to EN374) if hand contact with substance likely. Clean up contamination/spills as soon as they occur. Wash off any skin contamination immediately. Provide basic employee training to prevent / minimise exposures and to report any skin problems that may develop.
General exposures (closed systems).	No other specific measures identified.
General exposures (open systems).	Wear suitable gloves tested to EN374.
Process sampling.	No other specific measures identified.
Drum/batch transfers.	Use drum pumps or carefully pour from container. Wear chemically resistant gloves (tested to EN374) in combination with 'basic' employee training.
Bulk transfers.	Handle substance within a closed system. Wear suitable gloves tested to EN374.
Mixing operations (open systems).	Provide extract ventilation to points where emissions occur. Wear chemically resistant gloves (tested to EN374) in combination with 'basic' employee training.
Production or preparation or articles by tabletting, compression, extrusion or pelletisation.	Wear suitable gloves tested to EN374.
Drum/batch transfers.	Wear suitable gloves tested to EN374.
Laboratory activities.	No other specific measures identified.
Equipment cleaning and maintenance.	Drain down system prior to equipment break-in or maintenance.

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

	Wear chemically resistant gloves (tested to EN374) in combination with 'basic' employee training.
Storage.	Store substance within a closed system.

Section 2.2	Control of Environmental Exposure	
Substance is complex UVCB		
Predominantly hydrophobic.		
Amounts Used		
Fraction of EU tonnage used	in region:	0,1
Regional use tonnage (tonne	s/year):	2,8E+07
Fraction of Regional tonnage	used locally:	0,0011
Annual site tonnage (tonnes/	year):	3,0E+04
Maximum daily site tonnage ((kg/day):	1,0E+05
Frequency and Duration of	Use	
Continuous release.		
Emission Days (days/year):		300
Environmental factors not i	nfluenced by risk management	•
Local freshwater dilution factor	or:	10
Local marine water dilution fa	ictor:	100
	ns affecting Environmental Exposure	
	rocess (after typical onsite RMMs	1,0E-02
consistent with EU Solvent E	missions Directive requirements):	
Release fraction to wastewater from process (initial release prior to RMM):		2,0E-05
Release fraction to soil from process (initial release prior to RMM):		1,0E-04
Technical conditions and m	neasures at process level (source) to pr	event release
Common practices vary acros release estimates used.	ss sites thus conservative process	
Technical onsite conditions emissions and releases to	s and measures to reduce or limit disch soil	arges, air
Risk from environmental expo	osure is driven by freshwater sediment.	
Prevent discharge of undisso wastewater.	lved substance to or recover from onsite	
If discharging to domestic sev wastewater treatment require	wage treatment plant, no secondary d.	
Treat air emission to provide a typical removal efficiency of (%)		0
Treat onsite wastewater (prior to receiving water discharge) to provide the required removal efficiency of >= (%)		60,0
	wage treatment plant, provide the	0
	lved substance to or recover from onsite	

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

	_
wastewater.	
Organisational measures to prevent/limit release from site	
Do not apply industrial sludge to natural soils.	
Sludge should be incinerated, contained or reclaimed.	
Conditions and Measures related to municipal sewage treatment p	olant
Estimated substance removal from wastewater via domestic sewage treatment (%)	94,1
Total efficiency of removal from wastewater after onsite and offsite (domestic treatment plant) RMMs (%)	94,1
Maximum allowable site tonnage (MSafe) based on release following total wastewater treatment removal (kg/d)	6,8E+05
Assumed domestic sewage treatment plant flow (m3/d)	2.000
Conditions and Measures related to external treatment of waste fo	r disposal
External treatment and disposal of waste should comply with applicable regulations.	e local and/or regional
Conditions and measures related to external recovery of waste	
External recovery and recycling of waste should comply with applicable local and/or regional regulations.	

SECTION 3	EXPOSURE ESTIMATION

Section 3.1 - Health

The ECETOC TRA tool has been used to estimate workplace exposures unless otherwise indicated.

Section 3.2 - Environment

The Hydrocarbon Block Method has been used to calculate environmental exposure with the Petrorisk model.

GUIDANCE TO CHECK COMPLIANCE WITH THE EXPOSURE SCENARIO
Į.

Section 4.1 - Health

Predicted exposures are not expected to exceed the DN(M)EL when the Risk Management Measures/Operational Conditions outlined in Section 2 are implemented.

Where other Risk Management Measures/Operational Conditions are adopted, then users should ensure that risks are managed to at least equivalent levels.

Available hazard data do not enable the derivation of a DNEL for dermal irritant effects.

Risk Management Measures are based on qualitative risk characterisation.

34/46

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Section 4.2 -Environment

Guidance is based on assumed operating conditions which may not be applicable to all sites; thus, scaling may be necessary to define appropriate site-specific risk management measures.

Required removal efficiency for wastewater can be achieved using onsite/offsite technologies, either alone or in combination.

Required removal efficiency for air can be achieved using on-site technologies, either alone or in combination.

Further details on scaling and control technologies are provided in SpERC factsheet (http://cefic.org).

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Exposure Scenario - Worker

Exposure Scenario - Worker	
Gas Oils(vacuum,hydrocracked and distillate fuels)	
SECTION 1	EXPOSURE SCENARIO TITLE
Title	Use as a fuel - Industrial
Use Descriptor	Sector of Use: SU 3 Process Categories: PROC 1, PROC 2, PROC 3, PROC 8a, PROC 8b, PROC 16 Environmental Release Categories: ERC 7, ESVOC SpERC 7.12a.v1
Scope of process	Covers the use as a fuel (or fuel additive) and includes activities associated with its transfer, use, equipment maintenance and handling of waste.

SECTION 2	OPERATIONAL CONDITIONS AND RISK MANAGEMENT
	MEASURES

Section 2.1	Control of Worker Exposure	
Product Characteristics		
Physical form of product	Liquid, vapour pressure < 0.5 kPa at STP	
Concentration of substance	Covers use of substance/product up to 100% (unless stated	
in product.	differently).,	
Frequency and Duration of Use		
Covers daily exposures up to 8 hours (unless stated differently).		
Other Operational Conditions affecting Exposure		
Assumes use at not more than 20°C above ambient temperature (unless stated differently). Assumes a good basic standard of occupational hygiene has been implemented.		

Contributing Scenarios	Risk Management Measures
General measures applicable to all activities.	Control any potential exposure using measures such as contained systems, properly designed and maintained facilities and a good standard of general ventilation. Drain down systems and transfer lines prior to breaking containment. Drain down and flush equipment where possible prior to maintenance. Where there is potential for exposure: Ensure relevant staff are informed of exposure potential and aware of basic actions to minimise exposures; ensure suitable personal protective

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

	equipment is available; clear up spills and dispose of waste in accordance with regulatory requirements; monitor effectiveness of control measures; provide regular health surveillance as appropriate; identify and implement corrective actions.
General measures (skin irritants).	Avoid direct skin contact with product. Identify potential areas for indirect skin contact. Wear gloves (tested to EN374) if hand contact with substance likely. Clean up contamination/spills as soon as they occur. Wash off any skin contamination immediately. Provide basic employee training to prevent / minimise exposures and to report any skin problems that may develop.
Bulk transfers.	Wear suitable gloves tested to EN374.
Drum/batch transfers.	Wear suitable gloves tested to EN374.
Use as a fuel(closed systems).	No other specific measures identified.
Equipment cleaning and maintenance.	Drain down system prior to equipment break-in or maintenance. Wear chemically resistant gloves (tested to EN374) in combination with 'basic' employee training.
Storage.	Handle substance within a closed system.

Section 2.2 Control of Environmental Exposure		
Substance is complex UVCB.		
Predominantly hydrophobic.	Predominantly hydrophobic.	
Amounts Used		
Fraction of EU tonnage used	Fraction of EU tonnage used in region: 0,1	
Regional use tonnage (tonnes	s/year):	4,5E+06
Fraction of Regional tonnage used locally: 0,34		0,34
Annual site tonnage (tonnes/year):		1,5E+06
Maximum daily site tonnage (kg/day): 5,0E+06		5,0E+06
Frequency and Duration of Use		
Continuous release.		
Emission Days (days/year): 300		300
Environmental factors not influenced by risk management		
Local freshwater dilution factor: 10		10
Local marine water dilution factor: 100		100
Other Operational Conditions affecting Environmental Exposure		

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Release fraction to air from process (initial release prior to RMM):	5,0E-03	
Release fraction to wastewater from process (initial release prior to RMM):	1,0E-05	
Release fraction to soil from process (initial release prior to RMM):	0	
Technical conditions and measures at process level (source) to pro	event release	
Common practices vary across sites thus conservative process		
release estimates used.		
Technical onsite conditions and measures to reduce or limit discharge	arges, air	
emissions and releases to soil		
Risk from environmental exposure is driven by freshwater sediment.		
Onsite waste water treatment required.		
Treat air emission to provide a typical removal efficiency of (%)	95	
Treat onsite wastewater (prior to receiving water discharge) to provide the required removal efficiency of >= (%)	97,7	
If discharging to domestic sewage treatment plant, provide the	60,4	
required onsite wastewater removal efficiency of (%)		
Prevent discharge of undissolved substance to or recover from onsite		
wastewater.		
Organisational measures to prevent/limit release from site		
Do not apply industrial sludge to natural soils.		
Sludge should be incinerated, contained or reclaimed.		
Conditions and Measures related to municipal sewage treatment p	lant	
Estimated substance removal from wastewater via domestic sewage treatment (%)	94,1	
Total efficiency of removal from wastewater after onsite and offsite (domestic treatment plant) RMMs (%)	97,7	
Maximum allowable site tonnage (MSafe) based on release following total wastewater treatment removal (kg/d)	5,5E+06	
Assumed domestic sewage treatment plant flow (m3/d)	2.000	
Conditions and Measures related to external treatment of waste for disposal		
Combustion emissions limited by required exhaust emission controls.		
Waste combustion emissions considered in regional exposure assessm	ent.	
Conditions and measures related to external recovery of waste		
External recovery and recycling of waste should comply with applicable local and/or regional regulations.		

SECTION 3	EXPOSURE ESTIMATION
Section 3.1 - Health	
The ECETOC TRA tool has been used to estimate workplace exposures unless otherwise indicated.	

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Section 3.2 - Environment

The Hydrocarbon Block Method has been used to calculate environmental exposure with the Petrorisk model.

SECTION 4 GUIDANCE TO CHECK COMPLIANCE WITH THE EXPOSURE SCENARIO

Section 4.1 - Health

Predicted exposures are not expected to exceed the DN(M)EL when the Risk Management Measures/Operational Conditions outlined in Section 2 are implemented.

Where other Risk Management Measures/Operational Conditions are adopted, then users should ensure that risks are managed to at least equivalent levels.

Available hazard data do not enable the derivation of a DNEL for dermal irritant effects.

Risk Management Measures are based on qualitative risk characterisation.

Section 4.2 - Environment

Guidance is based on assumed operating conditions which may not be applicable to all sites; thus, scaling may be necessary to define appropriate site-specific risk management measures

Required removal efficiency for wastewater can be achieved using onsite/offsite technologies, either alone or in combination.

Required removal efficiency for air can be achieved using on-site technologies, either alone or in combination.

Further details on scaling and control technologies are provided in SpERC factsheet (http://cefic.org).

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Exposure Scenario - Worker

Exposure Scenario - Worker			
Gas Oils(vacuum,hydrocracked and distillate fuels)			
SECTION 1	EXPOSURE SCENARIO TITLE		
Title	Use as a fuel - Professional		
Use Descriptor	Sector of Use: SU 22 Process Categories: PROC 1, PROC 2, PROC 3, PROC 8a, PROC 8b, PROC 16 Environmental Release Categories: ERC 9A, ERC 9B, ESVOC SpERC 9.12b.v1		
Scope of process	Covers the use as a fuel (or fuel additive) and includes activities associated with its transfer, use, equipment maintenance and handling of waste.		

SECTION 2	OPERATIONAL CONDITIONS AND RISK MANAGEMENT
	MEASURES

Section 2.1	Control of Worker Exposure	
Product Characteristics		
Physical form of product	Liquid, vapour pressure < 0.5 kPa at STP	
Concentration of substance	Covers use of substance/product up to 100% (unless stated	
in product.	differently).,	
Frequency and Duration of Use		
Covers daily exposures up to 8 hours (unless stated differently).		
Other Operational Conditions affecting Exposure		
Assumes use at not more than 20°C above ambient temperature (unless stated differently). Assumes a good basic standard of occupational hygiene has been implemented.		

Contributing Scenarios	Risk Management Measures
General measures applicable to all activities.	Control any potential exposure using measures such as contained systems, properly designed and maintained facilities and a good standard of general ventilation. Drain down systems and transfer lines prior to breaking containment. Drain down and flush equipment where possible prior to maintenance. Where there is potential for exposure: Ensure relevant staff are informed of exposure potential and aware of basic actions to minimise exposures; ensure suitable personal protective

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

	equipment is available; clear up spills and dispose of waste in accordance with regulatory requirements; monitor effectiveness of control measures; provide regular health surveillance as appropriate; identify and implement corrective actions.
General measures (skin irritants).	Avoid direct skin contact with product. Identify potential areas for indirect skin contact. Wear gloves (tested to EN374) if hand contact with substance likely. Clean up contamination/spills as soon as they occur. Wash off any skin contamination immediately. Provide basic employee training to prevent / minimise exposures and to report any skin problems that may develop.
Bulk transfers.	Wear suitable gloves tested to EN374.
Drum/batch transfers.	Wear suitable gloves tested to EN374.
Refueling.	Wear suitable gloves tested to EN374.
Use as a fuel(closed systems).	Provide a good standard of general ventilation (not less than 3 to 5 air changes per hour). , or: Ensure operation is undertaken outdoors.
Equipment cleaning and maintenance.	Drain down system prior to equipment break-in or maintenance. Wear chemically resistant gloves (tested to EN374) in combination with 'basic' employee training.
Storage.	Store substance within a closed system.

Section 2.2	Control of Environmental I	Exposure
Substance is complex UVCB.		
Predominantly hydrophobic		
Amounts Used		
Fraction of EU tonnage use	ed in region:	0,1
Regional use tonnage (tonnes/year):		6,7E+06
Fraction of Regional tonnage used locally:		0,0005
Annual site tonnage (tonnes/year):		3,3E+03
Maximum daily site tonnage (kg/day):		9,2E+03
Frequency and Duration	of Use	
Continuous release.		

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Emission Days (days/year):	365	
Environmental factors not influenced by risk management	303	
Local freshwater dilution factor:	10	
	100	
Local marine water dilution factor:	100	
Other Operational Conditions affecting Environmental Exposure	4.05.04	
Release fraction to air from process (initial release prior to RMM):	1,0E-04	
Release fraction to wastewater from process (initial release prior to RMM):	1,0E-05	
Release fraction to soil from process (initial release prior to RMM):	1,0E-05	
Technical conditions and measures at process level (source) to pro	event release	
Common practices vary across sites thus conservative process release estimates used.		
Technical onsite conditions and measures to reduce or limit discharge emissions and releases to soil	arges, air	
Risk from environmental exposure is driven by freshwater sediment.		
If discharging to domestic sewage treatment plant, no secondary		
wastewater treatment required.		
Treat air emission to provide a typical removal efficiency of (%)		
Treat onsite wastewater (prior to receiving water discharge) to provide	8,3	
the required removal efficiency of >= (%)		
If discharging to domestic sewage treatment plant, provide the	0	
required onsite wastewater removal efficiency of (%)		
Prevent discharge of undissolved substance to or recover from onsite		
wastewater.		
Organisational measures to prevent/limit release from site		
Do not apply industrial sludge to natural soils.		
Sludge should be incinerated, contained or reclaimed.		
Conditions and Measures related to municipal sewage treatment p	lant	
Estimated substance removal from wastewater via domestic sewage	94,1	
treatment (%) Total efficiency of removal from wastewater after onsite and offsite	94,1	
(domestic treatment plant) RMMs (%)	94,1	
Maximum allowable site tonnage (MSafe) based on release following	1,4E+05	
total wastewater treatment removal (kg/d)		
Assumed domestic sewage treatment plant flow (m3/d)	2.000	
Conditions and Measures related to external treatment of waste for disposal		
Combustion emissions limited by required exhaust emission controls.		
Waste combustion emissions considered in regional exposure assessm	ent.	
Conditions and measures related to external recovery of waste		
External recovery and recycling of waste should comply with applicable local and/or regional		
regulations.		

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

SE	CTI	ON 3		EXPOSURE ESTIMATION
	4.1		 	

Section 3.1 - Health

The ECETOC TRA tool has been used to estimate workplace exposures unless otherwise indicated.

Section 3.2 - Environment

The Hydrocarbon Block Method has been used to calculate environmental exposure with the Petrorisk model.

SECTION 4 GUIDANCE TO CHECK COMPLIANCE WITH THE EXPOSURE SCENARIO

Section 4.1 - Health

Predicted exposures are not expected to exceed the DN(M)EL when the Risk Management Measures/Operational Conditions outlined in Section 2 are implemented.

Where other Risk Management Measures/Operational Conditions are adopted, then users should ensure that risks are managed to at least equivalent levels.

Available hazard data do not enable the derivation of a DNEL for dermal irritant effects.

Risk Management Measures are based on qualitative risk characterisation.

Section 4.2 -Environment

Guidance is based on assumed operating conditions which may not be applicable to all sites; thus, scaling may be necessary to define appropriate site-specific risk management measures

Required removal efficiency for wastewater can be achieved using onsite/offsite technologies, either alone or in combination.

Required removal efficiency for air can be achieved using on-site technologies, either alone or in combination.

Further details on scaling and control technologies are provided in SpERC factsheet (http://cefic.org).

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Exposure Scenario - Consumer

Exposure Scenario - Co		
Gas Oils(vacuum,hydrocracked and distillate fuels)		
SECTION 1	EXPOSURE SCENARIO TITLE	
Title	Use as a fuel - Consumer	
Use Descriptor	Sector of Use: SU 21 Product Categories: PC13 Environmental Release Categories: ERC 9A, ERC 9B, ESVOC SpERC 9.12c.v1	
Scope of process	Covers consumer uses in liquid fuels.	

SECTION 2	OPERATIONAL CONDITIONS AND RISK MANAGEMENT
	MEASURES

Section 2.1	Control of Consumer Exposure				
Product Characteristics	Product Characteristics				
Physical form of product	Liquid, vapour pressure > 10 Pa at STP				
Concentration of substance in product.	Unless otherwise stated:				
	Covers concentrations up to 100 %				
Amounts Used					
Unless otherwise stated:					
	<u>.</u>				
for each use event, covers amount up to (g): 37.500					
covers skin contact area (cm2):		420			
Frequency and Duration of Use					
Unless otherwise stated:					
	·				
covers use up to (times/day of use):		0,143			
Covers use up to (hours/event): 2					

Product Categories	OPERATIONAL CONDITIONS AND RISK MANAGEMENT MEASURES
Fuels. Liquid: Automotive Refuelling.	Covers concentration up to (%): 100 %
	Covers use up to (days/year): 52 day/year
	Covers use up to 1 times/day of use

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

	covers skin contact area up to 210 cm2
	For each use event, covers amount up to 37.500 g.
	Covers outdoor use.
	Covers use in room size of 100 m3
	Covers exposure up to 0,05 hours/event
Fuels. Liquid, Garden Equipment - Use.	Covers concentrations up to 100 %
	covers use up to 26 day/year
	Covers use up to 1 times/day of use
	For each use event, covers amount up to 750 g.
	Covers outdoor use.
	Covers use in room size of 100 m3
	Covers exposure up to 2,00 hours/event
Fuels. Liquid: Garden Equipment - Refuelling.	Covers concentrations up to 100 %
	covers use up to 26 day/year
	Covers use up to 1 times/day of use
	covers skin contact area up to 420 cm2
	For each use event, covers amount up to 750 g.
	Covers use in a one car garage (34 m3) under typical
	ventilation.
	Covers use in room size of 34 m3
	Covers exposure up to 0,03 hours/event

Section 2.2	Control of Environmental Expos	ure		
Substance is complex UVCB.				
Predominantly hydrophobic.	Predominantly hydrophobic.			
Amounts Used				
Fraction of EU tonnage used	in region:	0,1		
Regional use tonnage (tonnes	s/year):	1,6E+07		
Fraction of Regional tonnage	used locally:	0,0005		
Annual site tonnage (tonnes/y	/ear):	8,2E+03		
Maximum daily site tonnage (2,3E+04			
Frequency and Duration of Use				
Continuous release.				
Emission Days (days/year):	365			
Environmental factors not influenced by risk management				
Local freshwater dilution factor	or:	10		
Local marine water dilution factor:		100		
Other Operational Conditions affecting Environmental Exposure				
Release fraction to air from w	1,0E-04			
Release fraction to wastewate	1,0E-05			
Release fraction to soil from v	1,0E-05			

Effective Date 01.08.2012 Regulation 1907/2006/EC

Safety Data Sheet

Conditions and Measures related to municipal sewage treatment plant		
Estimated substance removal from wastewater via domestic sewage treatment (%)	94,1	
Maximum allowable site tonnage (MSafe) based on release following total wastewater treatment removal (kg/d)	3,5E+05	
Assumed domestic sewage treatment plant flow (m3/d)	2.000	
Conditions and Massures related to external treatment of waste for disposal		

Conditions and Measures related to external treatment of waste for disposal

Combustion emissions limited by required exhaust emission controls.

Waste combustion emissions considered in regional exposure assessment.

Conditions and measures related to external recovery of waste

External recovery and recycling of waste should comply with applicable local and/or regional regulations.

SECTION 3	EXPOSURE ESTIMATION	
Section 3.1 - Health		
The ECETOC TRA tool has been used to estimate consumer exposures unless otherwise		
indicated.		

Section 3.2 - Environment

The Hydrocarbon Block Method has been used to calculate environmental exposure with the Petrorisk model.

SECTION 4	GUIDANCE TO CHECK COMPLIANCE WITH THE EXPOSURE SCENARIO	
Section 4.1 - Health		
Predicted exposures are not expected to exceed the DN(M)FL when the Risk Management		

Predicted exposures are not expected to exceed the DN(M)EL when the Risk Management Measures/Operational Conditions outlined in Section 2 are implemented. Where other Risk Management Measures/Operational Conditions are adopted, then users should ensure that risks are managed to at least equivalent levels.

Section 4.2 -Environment

Further details on scaling and control technologies are provided in SpERC factsheet (http://cefic.org).



TCI AMERICA SAFETY DATA SHEET

Revision number: 1 **Revision date: 07/06/2018**

1. IDENTIFICATION

Product name: 1,1,1,2-Tetrachloroethane

Product code: T0695

For laboratory research purposes. Product use: Restrictions on use: Not for drug or household use.

Company: TCI America 9211 N. Harborgate Street

Portland, OR 97203 U.S.A. Telephone:

+1-800-423-8616 / +1-503-283-1681

Fax:

+1-888-520-1075 / +1-503-283-1987

e-mail:

sales-US@TCIchemicals.com www.TCIchemicals.com

Emergency telephone number:

Chemical Emergencies:

TCI America (8:00am - 5:00pm) PST

+1-503-286-7624

Transportation Emergencies:

Chemtrec 24-Hour

+1-800-424-9300 (U.S.A.)

+1-703-527-3887 (International) Responsible department:

TCI America

Environmental Health Safety and Security

+1-503-286-7624

2. HAZARD(S) IDENTIFICATION

OSHA Haz Com: CFR 1910.1200:

WHMIS 2015:

Acute Toxicity - Oral [Category 4] Acute Toxicity - Inhalation [Category 4] Skin Corrosion/Irritation [Category 2] Eye Damage/Irritation [Category 1] Carcinogenicity [Category 2] Aquatic Hazard (Acute) [Category 3]

Signal word: Danger!

Harmful if swallowed or if inhaled Hazard Statement(s):

Causes skin irritation Causes serious eye damage Suspected of causing cancer Harmful to aquatic life

Pictogram(s) or Symbol(s):







Precautionary Statement(s): [Prevention]

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Avoid breathing mist, vapors or spray. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Do not eat, drink or smoke when using this product. Wash hands and face

thoroughly after handling. Wear protective gloves, protective clothing, face protection.

If swallowed: Call a poison center or doctor if you feel unwell. Rinse mouth. If on skin: Wash with plenty [Response] of soap and water. If skin irritation occurs: Get medical advice or attention. Take off contaminated clothing and wash it before reuse. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center or doctor if you feel unwell. If in eyes: Rinse cautiously with water for

several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison center or doctor. If exposed or concerned: Get medical advice or attention.

Store locked up. [Storage]

Dispose of contents and container in accordance with local, regional, national regulations (e.g. US: 40

CFR Part 261, EU:91/156/EEC, JP: Waste Disposal and Cleaning Act, etc.).

Hazards not otherwise classified:

[Disposal]

[HNOC]

None.

1,1,1,2-Tetrachloroethane TCI AMERICA Page 2 of 5

3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance/mixture: Substance

Components: 1,1,1,2-Tetrachloroethane

 Percent:
 >99.0%(GC)

 CAS RN:
 630-20-6

 Molecular Weight:
 167.84

 Chemical Formula:
 C2H2Cl4

4. FIRST-AID MEASURES

Description of first aid measures

Inhalation: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical

advice/attention.

Skin contact: Remove/Take off immediately all contaminated clothing. Gently wash with plenty of soap and water.

Get medical advice/attention.

Eye contact: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Get

medical advice/attention.

Ingestion: Get medical advice/attention.Rinse mouth.

Symptoms/effects:

Acute: Pain. Redness.

Delayed: No data available

Indication of any immediate medical attention:

Not available.

Notes to physician: No data available

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media: Dry chemical, foam, water spray, carbon dioxide.

Specific hazards arising from the

chemical:

Hazardous combustion products:

Other specific hazards:

Take care as it may decompose upon combustion or in high temperatures to generate poisonous fume.

These products include: Carbon oxides Halogenated compounds WARNING: Highly toxic HCl gas is produced during combustion.

Advice for firefighters: Wear self-contained breathing apparatus if possible.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures:

Use personal protective equipment. Keep people away from and upwind of spill/leak. Ensure adequate ventilation. Entry to non-involved personnel should be controlled around the leakage area by roping off,

etc.

Environmental precautions:

Methods and materials for containment

and cleaning up:

Prevent product from entering drains.

Absorb spilled material in a suitable absorbent (e.g. rag, dry sand, earth, saw-dust). In case of large amount of spillage, contain a spill by bunding. Adhered or collected material should be promptly

disposed of, in accordance with appropriate laws and regulations.

7. HANDLING AND STORAGE

Precautions for safe handling: Handling is performed in a well ventilated place. Wear suitable protective equipment. Prevent

generation of vapour or mist. Wash hands and face thoroughly after handling.

Use a closed system if possible. Use a ventilation, local exhaust if vapour or aerosol will be generated.

Avoid all contact!

Conditions for safe storage, including any incompatibilities

Storage conditions: Keep container tightly closed. Store in a cool and dark place.

Store locked up.

Store away from incompatible materials such as oxidizing agents.

Packaging material: Comply with laws.

1,1,1,2-Tetrachloroethane TCI AMERICA Page 3 of 5

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Appropriate engineering controls: Follow safe industrial engineering/laboratory practices when handling any chemical. Install a closed

system or local exhaust. Also install safety shower and eye bath.

Personal protective equipment

Respiratory protection: Half or full facepiece respirator, self-contained breathing apparatus(SCBA), supplied air respirator, etc.

Use respirators approved under appropriate government standards and follow local and national

regulations.

Hand protection: Impervious gloves.

Eye protection: Safety goggles. A face-shield, if the situation requires.

Skin and body protection: Impervious protective clothing. Protective boots, if the situation requires.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical state (20°C): Liquid Clear

Colorless - Almost colorless

Odour:
Odor threshold:
No data available
No data available
No data available
No data available

Melting point/freezing point: No data available No data available pH: Boiling point/range: 131°C (268°F) Vapour pressure: No data available. No data available Vapour density: Decomposition temperature: No data available Relative density: 1.56 **Dynamic Viscosity:** No data available

Kinematic viscosity: No data available

Log Pow:No data availableEvaporation rate(ButylNo data available

Acetate=1):

Flash point: No data available Autoignition temperature: No data available

Flammability(solid, gas): No data available Flammability or explosive limits:

Lower: No data available
Upper: No data available

Solubility(ies):

[Water] No data available

[Other solvents]
Soluble: Ether, Alcohols, Benzene, Acetone, Chloroform

10. STABILITY AND REACTIVITY

Reactivity: No data available

Chemical stability: Stable under proper conditions.

Possibility of hazardous reactions: No special reactivity has been reported.

Incompatible materials: Oxidizing agents

Hazardous decomposition products: Carbon dioxide, Carbon monoxide, Hydrogen chloride

1,1,1,2-Tetrachloroethane TCI AMERICA Page 4 of 5

11. TOXICOLOGICAL INFORMATION

RTECS Number: KI8450000

Acute Toxicity:

ihl-rat LC50:2100 ppm/4H orl-rat LD50:670 mg/kg

Skin corrosion/irritation:

No data available

Serious eye damage/irritation:

No data available

Respiratory or skin sensitization:

No data available

Germ cell mutagenicity:

mmo-sat 10 ug/plate (+/-S9) msc-mus-lym 200 mg/L

Carcinogenicity: No data available

IARC: Group 2B (Possibly carcinogenic

NTP: No data available

OSHA: No data available

Reproductive toxicity: No data available

Target organ(s): No data available

12. ECOLOGICAL INFORMATION

to humans).

Ecotoxicity:

Fish: No data available
Crustacea: No data available
Algae: No data available

Persistence / degradability:

Bioaccumulative potential(BCF):

Mobility in soil

No data available No data available

Log Pow:

Soil adsorption (Koc):

Henry's Law (PaM ³/mol):

No data available
No data available

13. DISPOSAL CONSIDERATIONS

Disposal of product: Recycle to process if possible. It is the generator's responsibility to comply with Federal, State and

Local rules and regulations. You may be able to dissolve or mix material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber system. This section is intended to provide assistance but does not replace these laws, nor does compliance in accordance with this section ensure regulatory compliance according to the law. US EPA guidelines for identification and listing of Hagardens Weste are listed in 40 CER Ports 361. The product should not

Identification and Listing of Hazardous Waste are listed in 40 CFR Parts 261. The product should not be allowed to enter the environment, drains, water ways, or the soil.

Disposal of container: Dispose of as unused product. Do not re-use empty containers.

Other considerations: Observe all federal, state and local regulations when disposing of the substance.

1,1,1,2-Tetrachloroethane TCI AMERICA Page 5 of 5

14. TRANSPORT INFORMATION

DOT (US)

UN number: Proper Shipping Name: Class or Division: Packing Group:

UN2810 Toxic, liquids, organic, n.o.s 6.1 Toxic material.

<u>IATA</u>

UN number: Proper Shipping Name: Class or Division: Packing Group:

UN2810 Toxic liquid, organic, n.o.s 6.1 Toxic material. II

IMDG

UN UN2810 Proper Shipping Name: Class or Division: Packing Group:

numb Toxic liquid, organic, n.o.s 6.1 Toxic material. III er:

EmS number: F-A, S-A

15. REGULATORY INFORMATION

Toxic Substance Control Act (TSCA 8b.):

This product is ON the EPA Toxic Substances Control Act (TSCA) inventory.

US Federal Regulations

CERCLA Hazardous substance and Reportable Quantity:

SARA 313: Listed SARA 302: Not Listed

State Regulations
State Right-to-Know

Massachusetts
New Jersey
Pennsylvania
California Proposition 65:
Listed
Listed

Other Information

NFPA Rating:HMIS Classification:Health:2Health:2Flammability:0Flammability:0Instability:0Physical:0

International Inventories

 Canada: DSL
 On DSL

 EC-No:
 211-135-1

16. OTHER INFORMATION

Revision date: 07/06/2018 Revision number: 1

TCI chemicals are for research purposes only and are NOT intended for use as drugs, food additives, households, or pesticides. The information herein is believed to be correct, but does not claim to be all inclusive and should be used only as a guide. Neither the above named supplier nor any of its affiliates or subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All chemical reagents must be handled with the recognition that their chemical, physiological, toxicological, and hazardous properties have not been fully investigated or determined. All chemical reagents should be handled only by individuals who are familiar with their potential hazards and who have been fully trained in proper safety, laboratory, and chemical handling procedures. Although certain hazards are described herein, we can not guarantee that these are the only hazards which exist. Our SDS are based only on data available at the time of shipping and are subject to change without notice as new information is obtained. Avoid long storage periods since the product is subject to degradation with age and may become more dangerous or hazardous. It is the responsibility of the user to request updated SDS for products that are stored for extended periods. Disposal of unused product must be undertaken by qualified personnel who are knowledgeable in all applicable regulations and follow all pertinent safety precautions including the use of appropriate protective equipment (e.g. protective goggles, protective clothing, breathing equipment, face mask, fume hood). For proper handling and disposal, always comply with federal, state and local regulations.



Material Name METHYL CHLOROFORM

* * *Section 1 - IDENTIFICATION* * *

Product Identifier: METHYL CHLOROFORM

Trade Names/Synonyms

MTG MSDS 219; 1,1,1-TRICHLOROETHANE; ALPHA-TRICHLOROETHANE; AEROTHENE TT; METHYLTRICHLOROMETHANE; METHYLCHLOROFORM; TRICHLOROMETHYLMETHANE;

TRICHLOROETHANE; ETHANE, 1,1,1-TRICHLOROETHANE; CHLORTEN; 1,1,1-TRICHLORETHANE; UN

2831; C2H3Cl3

Chemical Family

halogenated, aliphatic

Recommended Use

industrial

Restrictions on Use

None known.

Manufacturer Information

MATHESON TRI-GAS, INC. 150 Allen Road, Suite 302 Basking Ridge, NJ 07920 General Information: 1-800-416-2505

Emergency #: 1-800-424-9300 (CHEMTREC)
Outside the US: 703-527-3887 (Call collect)

SDS ID: MAT14370

* * *Section 2 - HAZARDS IDENTIFICATION* * *

Classification in accordance with 29 CFR 1910.1200

Acute Toxicity (Inhalation), Category 4

Skin Corrosion / Irritation, Category 2

Eye Damage / Irritation, Category 2A

Toxic to Reproduction, Category 2

Specific Target Organ Toxicity - Single Exposure, Category 1 (central nervous system and heart)

Specific Target Organ Toxicity - Single Exposure, Category 3 (respiratory system)

Specific Target Organ Toxicity - Repeated Exposure, Category 1 (central nervous system, heart, and liver)

Specific Target Organ Toxicity - Repeated Exposure, Category 2 (brain, lungs, and nervous system)

Hazardous to the Aquatic Environment - Acute Hazard, Category 2

Hazardous to the Aquatic Environment - Chronic Hazard, Category 2

Hazardous for the ozone layer, Category 1

GHS LABEL ELEMENTS

Symbol(s)



Signal Word

DANGER

SDS ID: MAT14370

Material Name METHYL CHLOROFORM

Hazard Statement(s)

Harmful if inhaled

Causes skin irritation

Causes serious eye irritation

Suspected of damaging fertility or the unborn child

Causes damage to central nervous system and heart.

May cause respiratory tract irritation.

Causes damage to central nervous system, heart, and liver through prolonged or repeated exposure.

May cause damage to brain, lungs, nervous system through prolonged or repeated exposure.

Toxic to aquatic life with long lasting effects

Harms public health and the environment by destroying ozone in the upper atmosphere

Precautionary Statement(s)

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Do not breathe vapor or mist. Use only outdoors or in a well-ventilated area. Wear protective gloves and eye/face protection. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Avoid release to the environment.

Response

IF exposed: Call a POISON CENTER or doctor/physician. IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell. IF ON SKIN: Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before reuse. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. Collect spillage.

Storage

Store in a well-ventilated place. Keep container tightly closed. Store locked up.

Disposal

Dispose of in accordance with applicable regulations.

Refer to manufacturer/supplier for information on recovery/recycling.

* * *Section 3 - COMPOSITION / INFORMATION ON INGREDIENTS* * *

CAS	Component	Percent
71-55-6	METHYL CHLOROFORM	100

Component Related Regulatory Information

This product may be regulated, have exposure limits or other information identified as the following: Trichloroethane (25323-89-1).

* * *Section 4 - FIRST AID MEASURES* * *

Description of Necessary Measures

Inhalation

If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. If breathing is difficult, oxygen should be administered by qualified personnel. Get immediate medical attention.

Skin

Wash skin with soap and water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention, if needed. Thoroughly clean and dry contaminated clothing and shoes before reuse.

SDS ID: MAT14370

Material Name METHYL CHLOROFORM

Eyes

Flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Then get immediate medical attention.

Ingestion

If vomiting occurs, keep head lower than hips to help prevent aspiration. If person is unconscious, turn head to side. Get medical attention immediately.

Most Important Symptoms/Effects

Acute

respiratory tract irritation, skin irritation, eye irritation, central nervous system depression, central nervous system damage, heart damage

Delayed

central nervous system damage, heart damage, liver damage, reproductive effects, lung damage, brain damage, nervous system damage

Indication of Immediate Medical Attention and Special Treatment

For inhalation, consider oxygen.

* * *Section 5 - FIRE FIGHTING MEASURES* * *

Suitable Extinguishing Media

carbon dioxide, regular dry chemical, water spray

Large fires: Use dry chemical, carbon dioxide, alcohol-resistant foam or water spray.

Unsuitable Extinguishing Media

Do not scatter spilled material with high-pressure water streams.

Specific Hazards Arising from the Chemical

Slight fire hazard.

Hazardous Combustion Products

Combustion: hydrogen chloride, phosgene, oxides of carbon

Fire Fighting Measures

Move container from fire area if it can be done without risk. Fight fire from maximum distance or use unmanned hose holders or monitor nozzles. Cool containers with water spray until well after the fire is out. Withdraw immediately in case of rising sound from venting safety device or any discoloration of tanks due to fire. Stay away from the ends of tanks. For tank, rail car or tank truck, evacuation radius: 800 meters (1/2 mile).

Special Protective Equipment and Precautions for Firefighters

Wear full protective fire fighting gear including self contained breathing apparatus (SCBA) for protection against possible exposure.

* * *Section 6 - ACCIDENTAL RELEASE MEASURES* * *

Personal Precautions, Protective Equipment and Emergency Procedures

Wear personal protective clothing and equipment, see Section 8. Avoid release to the environment.

Methods and Materials for Containment and Cleaning Up

Avoid heat, flames, sparks and other sources of ignition. Eliminate all ignition sources if safe to do so. Stop leak if possible without personal risk. **Small spills:** Absorb with sand or other non-combustible material. Collect spilled material in appropriate container for disposal. **Large spills:** Dike for later disposal. Remove sources of ignition. Keep unnecessary people away, isolate hazard area and deny entry. Notify Local Emergency Planning Committee and State Emergency Response Commission for release greater than or equal to RQ (U.S. SARA Section 304). If release occurs in the U.S. and is reportable under CERCLA Section 103, notify the National Response Center at (800)424-8802 (USA) or (202)426-2675 (USA).

Material Name METHYL CHLOROFORM

* * *Section 7 - HANDLING AND STORAGE* * *

Precautions for Safe Handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Do not breathe vapor or mist. Use only outdoors or in a well-ventilated area. Wear protective gloves and eye/face protection. Wash thoroughly after handling. Do not eat, drink, or smoke when using this product. Avoid release to the environment.

SDS ID: MAT14370

Conditions for Safe Storage, including any Incompatibilities

Store and handle in accordance with all current regulations and standards. Store in a well-ventilated place. Keep container tightly closed. Store locked up. Store in a cool, dry place. Keep separated from incompatible substances.

Incompatibilities combustible materials, bases, metals, oxidizing materials

* * *Section 8 - EXPOSURE CONTROLS / PERSONAL PROTECTION* * *

Component Exposure Limits

METHYL CHLOROFORM (71-55-6)

ACGIH: 350 ppm TWA

450 ppm STEL

Europe: 100 ppm TWA; 555 mg/m3 TWA

200 ppm STEL; 1110 mg/m3 STEL

OSHA (Final): 350 ppm TWA; 1900 mg/m3 TWA
OSHA (Vacated): 350 ppm TWA; 1900 mg/m3 TWA

450 ppm STEL; 2450 mg/m3 STEL

NIOSH: 350 ppm Ceiling (15 min); 1900 mg/m3 Ceiling (15 min)

Component Biological Limit Values

METHYL CHLOROFORM (71-55-6)

ACGIH: 40 ppm Medium: end-exhaled air Time: prior to last shift of workweek Parameter: Methyl

chloroform; 10 mg/L Medium: urine Time: end of workweek Parameter: Trichloroacetic acid (nonspecific, semi-quantitative); 30 mg/L Medium: urine Time: end of shift at end of workweek Parameter: Total trichloroethanol (nonspecific, semi-quantitative); 1 mg/L Medium: blood Time:

end of shift at end of workweek Parameter: Total trichloroethanol (nonspecific)

IDLH

700 ppm

Appropriate Engineering Controls

Provide local exhaust or process enclosure ventilation system. Ensure compliance with applicable exposure limits.

Individual Protection Measures, such as Personal Protective Equipment

Eyes/Face Protection

Wear splash resistant safety goggles with a faceshield. Provide an emergency eye wash fountain and quick drench shower in the immediate work area.

Skin Protection

Wear appropriate chemical resistant clothing.

Glove Recommendations

Wear appropriate chemical resistant gloves.

Respiratory Protection

The following respirators and maximum use concentrations are drawn from NIOSH and/or OSHA.

700 ppm

Any supplied-air respirator.

Material Name METHYL CHLOROFORM

Any self-contained breathing apparatus with a full facepiece.

Emergency or planned entry into unknown concentrations or IDLH conditions -

Any self-contained breathing apparatus that has a full facepiece and is operated in a pressure-demand or other positive-pressure mode.

SDS ID: MAT14370

Any supplied-air respirator with a full facepiece that is operated in a pressure-demand or other positive-pressure mode in combination with an auxiliary self-contained breathing apparatus operated in pressure-demand or other positive-pressure mode.

Escape -

Any air-purifying full-facepiece respirator (gas mask) with a chin-style, front-mounted or back-mounted organic vapor canister.

Any appropriate escape-type, self-contained breathing apparatus.

* * *Section 9 - PHYSICAL AND CHEMICAL PROPERTIES* * *

Physical State: Liquid Appearance: clear, colorless liquid

Color:colorlessPhysical Form:volatile liquidOdor:sweet odorOdor Threshold:44 - 100 ppmpH:Not availableMelting/Freezing Point:-32 °C

Boiling Point: 74 °C Flash Point: >93.3 °C

Decomposition: Not available **Evaporation Rate:** 5.0 (butyl acetate=1)

LEL: 7.5 % **UEL**: 12.5 %

Vapor Pressure:100 mmHg @ 20 °CHenry's Law Constant:0.072 atm-cu m/mole @ 25°C

 Vapor Density (air = 1):
 4.55
 Specific Gravity (water=1):
 1.3390

 Water Solubility:
 0.078 % @ 25 °C
 Log KOW:
 2.49

KOC: 17823.79 estimated from water Auto Ignition: 537 °C

solubility

Viscosity:0.858 cP @20 °CVolatility:100%Molecular Weight:133.40Molecular Formula:C-H3-C-Cl3

Other Property Information

No additional information is available.

Solvent Solubility

Soluble: acetone, benzene, chloroform, methanol, ethanol, carbon disulfide, ether, carbon tetrachloride, heptane

* * *Section 10 - STABILITY AND REACTIVITY* * *

Reactivity

No reactivity hazard is expected.

Chemical Stability

Stable at normal temperatures and pressure.

Possibility of Hazardous Reactions

Will not polymerize.

Conditions to Avoid

Avoid heat, flames, sparks and other sources of ignition. Containers may rupture or explode if exposed to heat.

Incompatible Materials

combustible materials, bases, metals, oxidizing materials

Hazardous Decomposition

Combustion: hydrogen chloride, phosgene, oxides of carbon

Material Name METHYL CHLOROFORM

* * *Section 11 - TOXICOLOGICAL INFORMATION* * *

Acute and Chronic Toxicity

Component Analysis - LD50/LC50

The components of this material have been reviewed in various sources and the following selected endpoints are published:

METHYL CHLOROFORM (71-55-6)

Dermal LD50 Rabbit >15800 mg/kg; Inhalation LC50 Rat 18000 ppm 4 h; Oral LD50 Rat >2000 mg/kg

RTECS Acute Toxicity (selected)

The components of this material have been reviewed, and RTECS publishes the following endpoints:

METHYL CHLOROFORM (71-55-6)

Inhalation: 24400 mg/m3 Inhalation Cat LC50; 29492 ppm/10 minute(s) Inhalation Mouse LC50;

3911 ppm/2 hour Inhalation Mouse LC50

20000 ppm/2 hour Inhalation Rat LC50; 14250 ppm/7 hour Inhalation Rat LC50; 17000

SDS ID: MAT14370

ppm/4 hour Inhalation Rat LC50

Acute Toxicity Level

METHYL CHLOROFORM (71-55-6)

Slightly Toxic: inhalation, dermal absorption, ingestion

Information on Likely Routes of Exposure

Inhalation

irritation, changes in blood pressure, nausea, vomiting, diarrhea, difficulty breathing, irregular heartbeat, headache, drowsiness, dizziness, mood swings, loss of coordination, blood disorders, heart disorders, kidney damage, liver damage, convulsions, unconsciousness, coma, heart damage, reproductive effects

Ingestion

irritation, nausea, vomiting, diarrhea, stomach pain, irregular heartbeat, headache, drowsiness, dizziness, disorientation, loss of coordination, kidney damage, liver damage, convulsions, unconsciousness, coma, reproductive effects

Skin Contact

irritation (possibly severe)

Eye Contact

irritation

Immediate Effects

respiratory tract irritation, skin irritation, eye irritation, central nervous system depression, central nervous system damage, heart damage

Delayed Effects

central nervous system damage, heart damage, liver damage, reproductive effects, brain damage, lung damage, nervous system damage

Medical Conditions Aggravated by Exposure

heart or cardiovascular disorders, kidney disorders, liver disorders, skin disorders and allergies

Irritation/Corrosivity Data

respiratory tract irritation, skin irritation, eye irritation

RTECS Irritation

The components of this material have been reviewed, and RTECS publishes the following endpoints:

METHYL CHLOROFORM (71-55-6)

450 ppm/8 hour Eyes Man; 100 mg Eyes Rabbit mild; 2 mg/24 hour Eyes Rabbit severe; 5 gm/12 day(s) intermittent Skin Rabbit mild; 20 mg/24 hour Skin Rabbit moderate

SDS ID: MAT14370

Material Name METHYL CHLOROFORM

Local Effects

METHYL CHLOROFORM (71-55-6)

Irritant: inhalation, skin, eye

Target Organs

METHYL CHLOROFORM (71-55-6)

central nervous system

Respiratory Sensitization

No data available.

Dermal Sensitization

No data available.

Carcinogenicity

Component Carcinogenicity

METHYL CHLOROFORM (71-55-6)

ACGIH: A4 - Not Classifiable as a Human Carcinogen

IARC: Monograph 71 [1999]; Supplement 7 [1987]; Monograph 20 [1979] (Group 3 (not classifiable))

RTECS Mutagenic

The components of this material have been reviewed, and RTECS publishes data for one or more components.

Reproductive Effects Data

Available data characterizes this substance as a reproductive hazard.

RTECS Reproductive Effects

The components of this material have been reviewed, and RTECS publishes the following endpoints:

METHYL CHLOROFORM (71-55-6)

2100 ppm Inhalation Rat TCLo (6 hour, pregnant 1-20 day(s)); 7000 ppm Inhalation Rat TCLo (3 hour, pregnant 13-19 day(s)); 43 mg/kg Oral Rat TDLo (pregnant 1-22 day(s), 21 day(s))

RTECS Tumorigenic

The components of this material have been reviewed, and RTECS publishes data for one or more components.

Additional Data

Alcohol may enhance the toxic effects. Stimulants such as epinephrine may induce ventricular fibrillation.

Specific Target Organ Toxicity - Single Exposure

central nervous system, heart, respiratory system

Specific Target Organ Toxicity - Repeated Exposure

central nervous system, heart, liver, brain, lungs, nervous system

Aspiration Hazard

Not expected to be an aspiration hazard.

* * *Section 12 - ECOLOGICAL INFORMATION* * *

Ecotoxicity

Toxic to aquatic life with long lasting effects.

Page 7 of 9 Issue Date 12/10/2014 Revision 3.0900 Print Date: 12/10/2014

Material Name METHYL CHLOROFORM

Component Analysis - Aquatic Toxicity
METHYL CHLOROFORM (71-55-6)

Fish: 96 Hr LC50 Pimephales promelas: 35.2 - 50.7 mg/L [flow-through]; 96 Hr LC50

Lepomis macrochirus: 57 - 90 mg/L [static] (juvenile); 96 Hr LC50 Cyprinus carpio: 56 mg/L [flow-through]; 96 Hr LC50 Poecilia reticulata: 52.9 mg/L [flow-through]; 96 Hr LC50 Poecilia reticulata: 69.7 mg/L [static]; 96 Hr LC50 Pimephales promelas: 91 - 126

SDS ID: MAT14370

mg/L [static]; 96 Hr LC50 Oncorhynchus mykiss: 46 - 59 mg/L [static]

Algae: 96 Hr EC50 Pseudokirchneriella subcapitata: >500 mg/L

Invertebrate: 48 Hr LC50 Daphnia magna: >530 mg/L; 48 Hr EC50 Daphnia magna: 2384 mg/L; 48

Hr EC50 Daphnia magna: 9.7 - 12.8 mg/L [Static]

Persistence and Degradability

This material may biodegrade in soil and water.

Bioaccumulative Potential

Bioconcentration potential in aquatic organisms is low based on BCF value of 0.7-4.9.

Mobility

Expected to have high mobility in soil.

* * *Section 13 - DISPOSAL CONSIDERATIONS* * *

Disposal Methods

Dispose in accordance with all applicable regulations.

Component Waste Numbers

METHYL CHLOROFORM (71-55-6)

RCRA: waste number U226

* * *Section 14 - TRANSPORT INFORMATION* * *

US DOT Information

Shipping Name: 1,1,1-Trichloroethane

UN/NA #: UN2831 Hazard Class: 6.1 Packing Group: III

Required Label(s): 6.1

IMDG Information

Shipping Name: 1,1,1-Trichloroethane

UN #: UN2831 Hazard Class: 6.1 Packing Group: III

Required Label(s): 6.1

* * *Section 15 - REGULATORY INFORMATION* * *

Component Analysis

U.S. Federal Regulations

This material contains one or more of the following chemicals required to be identified under SARA Section 302/304 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65), CERCLA (40 CFR 302.4), TSCA 12(b), and/or require an OSHA process safety plan.

METHYL CHLOROFORM (71-55-6)

SARA 313: 1.0 % de minimis concentration CERCLA: 1000 lb final RQ; 454 kg final RQ

SARA 311/312 Hazardous Categories

Acute Health: Yes Chronic Health: Yes Fire: No Pressure: No Reactive: No

SDS ID: MAT14370

Material Name METHYL CHLOROFORM

U.S. State Regulations

The following components appear on one or more of the following state hazardous substances lists:

Component	CAS	CA	MA	MN	NJ	PA
METHYL CHLOROFORM	71-55-6	Yes	Yes	Yes	Yes	Yes

Not regulated under California Proposition 65

Component Analysis - Inventory

1			010	110	-			PН		1/5	011	
	Component		CAS	US	CA	EU	AU	РН	JP	KR	CN	NZ
	METHYL CHLC	ROFORM	71-55-6	Yes	DSL	EIN	Yes	Yes	Yes	Yes	Yes	Yes

* * *Section 16 - OTHER INFORMATION* * *

NFPA Ratings: Health: 2 Fire: 1 Reactivity: 0

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe

Key / Legend

ACGIH - American Conference of Governmental Industrial Hygienists; ADR - European Road Transport; AU -Australia; BOD - Biochemical Oxygen Demand; C - Celsius; CA - Canada; CAS - Chemical Abstracts Service; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CN - China; CPR -Controlled Products Regulations; DFG - Deutsche Forschungsgemeinschaft; DOT - Department of Transportation; DSL - Domestic Substances List; EEC - European Economic Community; EINECS - European Inventory of Existing Commercial Chemical Substances; EPA - Environmental Protection Agency; EU - European Union; F - Fahrenheit; IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; ICAO - International Civil Aviation Organization; IDL - Ingredient Disclosure List; IDLH - Immediately Dangerous to Life and Health; IMDG - International Maritime Dangerous Goods; JP - Japan; Kow - Octanol/water partition coefficient; KR - Korea; LEL - Lower Explosive Limit; LOLI - List Of LIsts™ - ChemADVISOR's Regulatory Database: MAK - Maximum Concentration Value in the Workplace: MEL - Maximum Exposure Limits: NFPA - National Fire Protection Agency; NIOSH - National Institute for Occupational Safety and Health; NJTSR -New Jersey Trade Secret Registry; NTP - National Toxicology Program; NZ - New Zealand; OSHA - Occupational Safety and Health Administration; PH - Philippines; RCRA - Resource Conservation and Recovery Act; RID -European Rail Transport; RTECS - Registry of Toxic Effects of Chemical Substances®; SARA - Superfund Amendments and Reauthorization Act; STEL - Short-term Exposure Limit; TDG - Transportation of Dangerous Goods; TSCA - Toxic Substances Control Act; TWA - Time Weighted Average; UEL - Upper Explosive Limit; US -**United States**

Other Information

Matheson Tri-Gas, Inc. makes no express or implied warranties, guarantees or representations regarding the product or the information herein, including but not limited to any implied warranty or merchantability or fitness for use. Matheson Tri-Gas, Inc. shall not be liable for any personal injury, property or other damages of any nature, whether compensatory, consequential, exemplary, or otherwise, resulting from any publication, use or reliance upon the information herein.

End of Sheet MAT14370



SAFETY DATA SHEET

Creation Date 22-Sep-2009 Revision Date 25-Apr-2019 Revision Number 6

1. Identification

Product Name Vinylidene chloride, stabilized

Cat No.: AC172290000; AC172290010; AC172290025; AC172290250

CAS-No 75-35-4

Synonyms 1,1-Dichloroethylene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids
Category 1
Acute oral toxicity
Category 4
Acute Inhalation Toxicity - Vapors
Category 4
Serious Eye Damage/Eye Irritation
Category 2
Carcinogenicity
Category 2
Specific target organ toxicity - (repeated exposure)
Category 2

Target Organs - Nasal Cavities, Liver.

Label Elements

Signal Word

Danger

Hazard Statements

Extremely flammable liquid and vapor

Causes serious eye irritation

Suspected of causing cancer

May cause damage to organs through prolonged or repeated exposure Harmful if swallowed or if inhaled



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Use only outdoors or in a well-ventilated area

Wear eye/face protection

Do not breathe dust/fume/gas/mist/vapors/spray

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

Rinse mouth

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep cool

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Toxic to aquatic life with long lasting effects

WARNING. Cancer - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Vinylidene chloride	75-35-4	>95
4-Methoxyphenol	150-76-5	0.02

4. First-aid measures

Eve Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Get medical attention.

Remove to fresh air. If breathing is difficult, give oxygen. Get medical attention. Inhalation

Ingestion Do NOT induce vomiting. Get medical attention.

Most important symptoms and

effects

Difficulty in breathing. . Inhalation of high vapor concentrations may cause symptoms like

headache, dizziness, tiredness, nausea and vomiting

Treat symptomatically Notes to Physician

Fire-fighting measures

Water spray. Carbon dioxide (CO2). Dry chemical. Water mist may be used to cool closed Suitable Extinguishing Media

containers. Chemical foam. Water mist may be used to cool closed containers.

No information available **Unsuitable Extinguishing Media**

-25 °C / -13 °F **Flash Point**

Method -No information available

Autoignition Temperature 520 °C / 968 °F

Explosion Limits

Upper 16.5% Lower 8.4%

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Extremely flammable. Vapors may travel to source of ignition and flash back. Vapors may form explosive mixture with air. Containers may explode when heated. Vapors may form explosive mixtures with air.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO₂). Formaldehyde, peroxides. Hydrogen chloride gas.

Protective Equipment and Precautions for Firefighters

Vapors are heavier than air and may spread along floors. As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health **Flammability** Instability Physical hazards N/A 2 4 1

6. Accidental release measures

Personal Precautions Environmental Precautions Remove all sources of ignition. Take precautionary measures against static discharges. Do not flush into surface water or sanitary sewer system. See Section 12 for additional Ecological Information. Avoid release to the environment, Collect spillage.

Up

Methods for Containment and Clean Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment. Do not let this chemical enter the environment.

7. Handling and storage

Handling

Ensure adequate ventilation. Wear personal protective equipment/face protection. Avoid contact with skin and eyes. Take precautionary measures against static discharges. Do not ingest. If swallowed then seek immediate medical assistance. Handle product only in closed system or provide appropriate exhaust ventilation. Use spark-proof tools and explosion-proof equipment. Use only non-sparking tools. Do not subject to

grinding/shock/friction. Avoid breathing dust/fume/gas/mist/vapors/spray. Keep away from open flames, hot surfaces and sources of ignition. To avoid ignition of vapors by static

electricity discharge, all metal parts of the equipment must be grounded.

Storage Refrigerator/flammables. Keep away from heat, sparks and flame. Protect from light. May

form explosive peroxides on prolonged storage. Keep under nitrogen. Keep containers

tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Vinylidene chloride	TWA: 5 ppm	(Vacated) TWA: 1 ppm		TWA: 5 ppm
		(Vacated) TWA: 4 mg/m ³		7 7
4-Methoxyphenol	TWA: 5 mg/m ³	(Vacated) TWA: 5 mg/m ³	TWA: 5 mg/m ³	TWA: 5 mg/m ³

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: NIOSH - National Institute for Occupational Safety and Health

Engineering Measures Use explosion-proof electrical/ventilating/lighting/equipment. Ensure adequate ventilation,

especially in confined areas. Ensure that eyewash stations and safety showers are close to

the workstation location.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateLiquidAppearanceColorlessOdoraromatic

Odor ThresholdNo information availablepH7 2.5 g/l aq.solMelting Point/Range-122 °C / -187.6 °F

Boiling Point/Range 31.2 - 32 °C / 88.2 - 89.6 °F @ 760 mmHg

Flash Point -25 °C / -13 °F Evaporation Rate No information available

Flammability (solid,gas) Not applicable

Flammability or explosive limits

 Upper
 16.5%

 Lower
 8.4%

Vapor Pressure665 mbar @ 20 °CVapor Density3.4 (Air = 1.0)

Specific Gravity 1.218

SolubilityNo information availablePartition coefficient; n-octanol/waterNo data availableAutoignition Temperature520 °C / 968 °FDecomposition TemperatureNo information availableViscosity.377 mPa.s at 15 °C

Molecular FormulaC2 H2 Cl2Molecular Weight96.94

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability May form explosive peroxides. Hazardous polymerization may occur upon depletion of

inhibitor. Moisture sensitive. Air sensitive. Light sensitive.

Conditions to Avoid Keep away from open flames, hot surfaces and sources of ignition. Excess heat. Exposure

to air. Exposure to light. Incompatible products. Exposure to moist air or water.

Incompatible Materials Strong oxidizing agents, Strong bases, Finely powdered metals, oxygen, Peroxides, Metals,

copper, Finely powdered metals, Acids

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO₂), Formaldehyde, peroxides, Hydrogen

chloride gas

Hazardous Polymerization Hazardous polymerization may occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

 Oral LD50
 Category 4. ATE = 300 - 2000 mg/kg.

 Vapor LC50
 Category 4. ATE = 10 - 20 mg/l.

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Vinylidene chloride	LD50 = 1500 mg/kg (Rat)	Not listed	LC50 = 1.66 mg/L (Rat) 4 h
	LD50 = 200 mg/kg (Rat)		LC50 = 6350 ppm (Rat) 4 h
4-Methoxyphenol	1600 mg/kg (Rat)	LD50 > 2000 mg/kg (Rabbit)	Not listed

Toxicologically Synergistic

No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation May cause skin, eye, and respiratory tract irritation

Sensitization No information available

Carcinogenicity Limited evidence of a carcinogenic effect. The table below indicates whether each agency

has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Vinylidene chloride	75-35-4	Group 2B	Not listed	Not listed	X	Not listed
4-Methoxyphenol	150-76-5	Not listed				

Mutagenic Effects Ames test: positive.

No information available. **Reproductive Effects**

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure Nasal Cavities Liver

Aspiration hazard No information available

delayed

Symptoms / effects,both acute and Inhalation of high vapor concentrations may cause symptoms like headache, dizziness,

tiredness, nausea and vomiting

No information available **Endocrine Disruptor Information**

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for

complete information.

12. Ecological information

Ecotoxicity

The product contains following substances which are hazardous for the environment. Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Vinylidene chloride	Not listed	LC50: 161 - 179 mg/L, 96h static (Pimephales promelas) LC50: 57 - 91 mg/L, 96h static (Lepomis macrochirus) LC50: 85 - 117 mg/L, 96h flow-through (Pimephales promelas)	EC50 > 2000 mg/L 17 h	LC50: 62 - 110 mg/L, 48h Static (Daphnia magna) LC50: 9.0 - 14.0 mg/L, 48h Static (Daphnia magna)
4-Methoxyphenol	Not listed	LC50: = 28.5 mg/L, 96h flow-through (Oncorhynchus mykiss) LC50: = 84.3 mg/L, 96h flow-through (Pimephales promelas)	EC50 = 3.66 mg/L 5 min EC50 = 4.30 mg/L 15 min EC50 = 4.61 mg/L 30 min	Not listed

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility Will likely be mobile in the environment due to its volatility.

Component	log Pow
Vinylidene chloride	2.02
4-Methoxyphenol	1.3

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Vinylidene chloride - 75-35-4	U078	-

14. Transport information

DOT

UN-No UN1303

Proper Shipping Name VINYLIDENE CHLORIDE, STABILIZED

Hazard Class 3
Packing Group

<u>TDG</u>

UN-No UN1303

Proper Shipping Name VINYLIDENE CHLORIDE, STABILIZED

Hazard Class
Packing Group

<u>IATA</u>

UN-No UN1303

Proper Shipping Name VINYLIDENE CHLORIDE, STABILIZED

Hazard Class
Packing Group

IMDG/IMO

UN-No UN1303

Proper Shipping Name VINYLIDENE CHLORIDE, STABILIZED

Hazard Class 3
Subsidiary Hazard Class P
Packing Group |

15. Regulatory information

United States of America Inventory

	Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
1	Vinylidene chloride	75-35-4	Х	ACTIVE	-
ı	4-Methoxyphenol	150-76-5	Χ	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Vinylidene chloride	75-35-4	X	-	200-864-0	X	X	Χ	Χ	KE-10122
4-Methoxyphenol	150-76-5	X	-	205-769-8	Χ	Х	X	Χ	KE-23353

U.S. Federal Regulations

SARA 313

OAKA 313			
Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Vinylidene chloride	75-35-4	>95	1.0

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazai Substand		le CWA - Toxic Pollutants	CWA - Priority Pollutants
Vinylidene chloride	e X	100 lb	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Vinylidene chloride	X		-

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Vinylidene chloride	100 lb 1 lb	-

California Proposition 65

This product contains the following Proposition 65 chemicals.

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Vinylidene chloride	75-35-4	Carcinogen	0.88 μg/day	Carcinogen

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Vinylidene chloride	X	X	X	X	X
4-Methoxyphenol	Χ	Х	X	-	Х

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product contains the following DHS chemicals:

Legend - STQs = Screening Threshold Quantities, APA = A placarded amount

Component	DHS Chemical Facility Anti-Terrorism Standard
Vinylidene chloride	Release STQs - 10000lb

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 22-Sep-2009

 Revision Date
 25-Apr-2019

 Print Date
 25-Apr-2019

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

Revision	Date	25-Apr	-2019
----------	------	--------	-------

End of SDS

SAFETY DATA SHEET



1. Identification

Product identifier 1,1-Dichloropropene

Other means of identification

Item N-10125 **CAS** number 563-58-6 Recommended use Not available. **Recommended restrictions** None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Chem Service, Inc. Company name 660 Tower Lane **Address**

West Chester, PA 19380

United States

Toll Free Telephone 800-452-9994

> Direct 610-692-3026

Website www.chemservice.com E-mail info@chemservice.com

Chemtrec US 800-424-9300 **Emergency phone number**

Chemtrec outside US +1 703-527-3887

2. Hazard(s) identification

Physical hazards Flammable liquids Category 2 Category 3 **Health hazards** Acute toxicity, oral **Environmental hazards** Hazardous to the aquatic environment, Category 3

long-term hazard

OSHA defined hazards Not classified.

Label elements



Signal word

Hazard statement Highly flammable liquid and vapor. Toxic if swallowed. Harmful to aquatic life with long lasting

effects.

Precautionary statement

Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Use explosion-proof Prevention

electrical/ventilating/lighting equipment. Keep container tightly closed. Wash thoroughly after handling. Ground/bond container and receiving equipment. Wear protective gloves/eye protection/face protection. Use only non-sparking tools. Take precautionary measures against static discharge. Do not eat, drink or smoke when using this product. Avoid release to the

If swallowed: Immediately call a poison center/doctor. If on skin (or hair): Take off immediately all Response

contaminated clothing. Rinse skin with water/shower. Rinse mouth. In case of fire: Use

appropriate media to extinguish.

Storage Store in a well-ventilated place. Keep cool. Store locked up.

Dispose of contents/container in accordance with local/regional/national/international regulations. Disposal

Hazard(s) not otherwise

classified (HNOC)

None known.

Supplemental information 100% of the mixture consists of component(s) of unknown acute dermal toxicity. 100% of the

mixture consists of component(s) of unknown acute inhalation toxicity. 100% of the mixture

Material name: 1,1-Dichloropropene

consists of component(s) of unknown acute hazards to the aquatic environment.

3. Composition/information on ingredients

Substances

Chemical name	Common name and synonyms	CAS number	%
1,1-Dichloropropene		563-58-6	100

4. First-aid measures

Inhalation Move to fresh air. Call a physician if symptoms develop or persist.

Skin contact Take off immediately all contaminated clothing. Rinse skin with water/shower. Get medical

attention if irritation develops and persists.

Eye contact Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if

present and easy to do. Get medical attention if irritation develops and persists.

Ingestion Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting without

advice from poison control center. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Do not use mouth-to-mouth method if victim ingested the substance. Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other

proper respiratory medical device.

Most important symptoms/effects, acute and delayed

Direct contact with eyes may cause temporary irritation.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Thermal burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim warm. Keep victim under observation. Symptoms may be delayed.

General information

Take off all contaminated clothing immediately. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing

media

Specific hazards arising from the chemical

Special protective equipment and precautions for firefighters

and precautions for firefig
Fire fighting

equipment/instructions
Specific methods

General fire hazards

Water fog. Foam. Dry chemical powder. Carbon dioxide (CO2).

Do not use water jet as an extinguisher, as this will spread the fire.

Vapors may form explosive mixtures with air. Vapors may travel considerable distance to a source of ignition and flash back. During fire, gases hazardous to health may be formed.

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk.

Use standard firefighting procedures and consider the hazards of other involved materials.

Highly flammable liquid and vapor.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area).

Large Spills: Stop the flow of material, if this is without risk. Keep combustibles (wood, paper, oil, etc.) away from spilled material. Take precautionary measures against static discharge. Use only non-sparking tools. Dike the spilled material, where this is possible. Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal. Prevent product from entering drains. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.

Never return spills to original containers for re-use.

N-10125 Version #: 02 Revision date: 09-05-2018 Issue date: 11-19-2014

Environmental precautions

Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Contact local authorities in case of spillage to drain/aquatic environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Explosion-proof general and local exhaust ventilation. Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Do not taste or swallow. Wear appropriate personal protective equipment. When using, do not eat, drink or smoke. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in original tightly closed container. Keep container tightly closed. Store in a cool, dry place out of direct sunlight. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS). Keep in an area equipped with sprinklers.

8. Exposure controls/personal protection

Occupational exposure limits

This substance has no PEL, TLV, or other recommended exposure limit.

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Explosion-proof general and local exhaust ventilation. Eye wash fountain and emergency showers

are recommended.

Individual protection measures, such as personal protective equipment

Face shield is recommended. Wear safety glasses with side shields (or goggles). Eye/face protection

Skin protection

Hand protection supplier.

Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove

Other Wear suitable protective clothing.

Respiratory protection If engineering controls do not maintain airborne concentrations below recommended exposure

limits (where applicable) or to an acceptable level (in countries where exposure limits have not been established), an approved respirator must be worn. Respiratory protection not required.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Keep away from food and drink. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state Liquid. Liquid **Form** Color Colorless Odor Not available. **Odor threshold** Not available. Ha Not available. Melting point/freezing point Not available.

Initial boiling point and boiling

168.8 - 170.6 °F (76 - 77 °C)

range

Flash point 32.0 °F (0 °C) Not available. **Evaporation rate** Flammability (solid, gas) Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower

Not available.

(%)

Flammability limit - upper

Not available.

(%)

Not available. Explosive limit - lower (%)

Explosive limit - upper (%) Not available.

Vapor pressure 3.2 kPa (77 °F (25 °C))

Vapor densityNot available.Relative densityNot available.

Solubility(ies)

Solubility (water) Not available.

Partition coefficient Not available.

(n-octanol/water)

Auto-ignition temperatureNot available.Decomposition temperatureNot available.ViscosityNot available.

Other information

Density 1.186 g/ml **Explosive properties** Not explosive.

Flammability class Flammable IB estimated

Molecular formulaC3-H4-Cl2Molecular weight110.98 g/molOxidizing propertiesNot oxidizing.

Percent volatile 100 % VOC 100 %

10. Stability and reactivity

ReactivityThe product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions.

Possibility of hazardous Hazardous polymerization does not occur.

reactions

Conditions to avoid Avoid heat, sparks, open flames and other ignition sources. Contact with incompatible materials.

Incompatible materials Strong oxidizing agents.

Hazardous decomposition

products

No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

InhalationNo adverse effects due to inhalation are expected.Skin contactNo adverse effects due to skin contact are expected.Eye contactDirect contact with eyes may cause temporary irritation.

Ingestion Toxic if swallowed.

Symptoms related to the physical, chemical and toxicological characteristics

Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity Toxic if swallowed. Not known.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation. **Serious eye damage/eye** Direct contact with eyes may cause temporary irritation.

irritation

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicityNo data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity Not classifiable as to carcinogenicity to humans.

IARC Monographs. Overall Evaluation of Carcinogenicity

Not listed.

Material name: 1,1-Dichloropropene

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not regulated.

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicityThis product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Not classified.

Aspiration hazard Not an aspiration hazard.

12. Ecological information

Ecotoxicity Harmful to aquatic life with long lasting effects.

Persistence and degradability

Bioaccumulative potential No data available.

Mobility in soil No data available.

Other adverse effects The product contains volatile organic compounds which have a photochemical ozone creation

potential.

13. Disposal considerations

Disposal instructionsCollect and reclaim or dispose in sealed containers at licensed waste disposal site. Do not allow

this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches

with chemical or used container. Dispose of contents/container in accordance with

local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste codeThe waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Waste from residues / unused

products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging Since emptied containers may retain product residue, follow label warnings even after container is

emptied. Empty containers should be taken to an approved waste handling site for recycling or

disposal.

14. Transport information

DOT

UN number UN2047

UN proper shipping name

Transport hazard class(es)

Dichloropropenes

Class 3
Subsidiary risk Label(s) 3
Packing group ||

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Special provisions IB2, T4, TP1

Packaging exceptions 150
Packaging non bulk 202
Packaging bulk 242

IATA

UN number UN2047

UN proper shipping name

Transport hazard class(es)

Dichloropropenes

Class 3
Subsidiary risk Packing group II
Environmental hazards No.
ERG Code 3L

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Material name: 1,1-Dichloropropene

SDS US

Other information

Passenger and cargo

aircraft

Allowed with restrictions.

Cargo aircraft only

Allowed with restrictions.

Not established.

IMDG

UN number UN2047

UN proper shipping name **DICHLOROPROPENES**

Transport hazard class(es)

3 Class Subsidiary risk Ш Packing group

Environmental hazards

Marine pollutant No. F-E, S-D **EmS**

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and

the IBC Code

DOT



IATA; IMDG



15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

1,1-Dichloropropene (CAS 563-58-6) Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not regulated.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes

Delayed Hazard - No Fire Hazard - Yes Pressure Hazard - No Reactivity Hazard - No

Material name: 1,1-Dichloropropene

N-10125 Version #: 02 Revision date: 09-05-2018 Issue date: 11-19-2014

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous Yes

chemical

SARA 313 (TRI reporting)

Not regulated.

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Clean Water Act (CWA) Hazardous substance Section 112(r) (40 CFR Toxic pollutant

68.130)

Safe Drinking Water Act

(SDWA)

Not regulated.

Inventory name

US state regulations California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material

is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

Country(s) or region

Australia	Australian Inventory of Chemical Substances (AICS)	No
Canada	Domestic Substances List (DSL)	No
Canada	Non-Domestic Substances List (NDSL)	Yes
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	No
New Zealand	New Zealand Inventory	No
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	No

^{*}A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s) A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

Toxic Substances Control Act (TSCA) Inventory

16. Other information, including date of preparation or last revision

 Issue date
 11-19-2014

 Revision date
 09-05-2018

Version # 02

United States & Puerto Rico

NFPA ratings Health: 3

Flammability: 3 Instability: 0

Material name: 1,1-Dichloropropene

SDS US

Yes

On inventory (yes/no)*

Disclaimer

Chem Service, Inc. cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The above information is believed to be correct on the date it was last revised and must not be considered all inclusive. The information has been obtained only by a search of available literature and is only a guide for handling the chemicals. OSHA regulations require that if other hazards become evident, an upgraded SDS must be made available to the employee within three months. RESPONSIBILITY for updates lies with the employer and not with CHEM SERVICE, Inc.

Persons not specifically and properly trained should not handle this chemical or its container. This product is furnished FOR LABORATORY USE ONLY! Our products may NOT BE USED as drugs, cosmetics, agricultural or pesticide products, food additives or as household chemicals.

This Safety Data Sheet (SDS) is intended only for use with Chem Service, Inc. products and should not be relied on for use with materials from any other supplier even if the chemical name(s) on the product are identical! Whenever using an SDS for a solution or mixture the user should refer to the SDS for every component of the solution or mixture. Chem Service warrants that this SDS is based upon the most current information available to Chem Service at the time it was last revised. THIS WARRANTY IS EXCLUSIVE, AND CHEM SERVICE, INC. MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. This SDS is provided gratis and CHEM SERVICE, INC. SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR CONTINGENT DAMAGES.

Copyright © 2000-2014 Chem Service, Inc. All rights reserved except that this SDS may be printed for the use of a customer or prospective customer of Chem Service, Inc provided the entire SDS is printed. The SDS may not be placed in any database or otherwise stored or distributed in electronic or any other form.

This product is furnished FOR LABORATORY USE ONLY.

Revision information

This document has undergone significant changes and should be reviewed in its entirety.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

SECTION 1: IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

1.1 Product identifier

Identification of the substance 1,2,4-trimethylbenzene
Registration number (REACH) 01-2119472135-42-xxxx

EC number 202-436-9

Index No

CAS number 95-63-6

Additional relevant and available information Pseudocumene

1.2 Relevant identified uses of the substance or mixture and uses advised against

Relevant identified uses industrial use (SCC)

1.3 Details of the supplier of the safety data sheet

DHC Solvent Chemie GmbH Timmerhellstraße 28 D-45478 Mülheim an der Ruhr Germany

Telephone: +49 (208) 9940-0 Telefax: +49 (208) 9940-150

Competent person responsible for the safety data

sheet

e-mail (competent person) productsafety@dhc-solvent.de

1.4 Emergency telephone number

Emergency information service

Poison centre	
Country	Telephone
United Kingdom	+44 1235 239670

Vanessa Manz

SECTION 2: HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture Classification according to Regulation (EC) No 1272/2008 (CLP)

Hazard class	Category	Hazard class and cat- egory	Hazard state- ment
flammable liquid	Cat. 3	(Flam. Liq. 3)	H226
acute toxicity (inhal.)	Cat. 4	(Acute Tox. 4)	H332
skin corrosion/irritation	Cat. 2	(Skin Irrit. 2)	H315
serious eye damage/eye irritation	Cat. 2	(Eye Irrit. 2)	H319
specific target organ toxicity - single exposure (respiratory tract irritation)	Cat. 3	(STOT SE 3)	H335
aspiration hazard	Cat. 1	(Asp. Tox. 1)	H304
hazardous to the aquatic environment - chronic hazard	Cat. 2	(Aquatic Chronic 2)	H411



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

Remarks

For full text of H-phrases: see SECTION 16.

Substance with a community indicative occupational exposure limit value.

The most important adverse physicochemical, human health and environmental effects

May be fatal if swallowed and enters airways.

The product is combustible and can be ignited by potential ignition sources.

22 Label elements

Labelling according to Regulation (EC) No 1272/2008 (CLP)

Signal word **Danger**

Pictograms

GHS02, GHS07, **GHS08, GHS09**









Hazard statements

H226 Flammable liquid and vapour.

H304 May be fatal if swallowed and enters airways.

H315 Causes skin irritation.

H319 Causes serious eve irritation.

H332 Harmful if inhaled.

H335 May cause respiratory irritation.

Toxic to aquatic life with long lasting effects. H411

Precautionary statements

Precautionary statements - prevention

P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No

smoking.

P243 Take action to prevent static discharges. P273

Avoid release to the environment.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

Precautionary statements - response

P301+P310 IF SWALLOWED: Immediately call a POISON CENTER/doctor/physician.

P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if

present and easy to do. Continue rinsing.

P331 Do NOT induce vomiting.

P370+P378 In case of fire: Use sand, carbon dioxide or powder extinguisher to extinguish.

Precautionary statements - storage

P403+P233 Store in a well-ventilated place. Keep container tightly closed.

Store in a well-ventilated place. Keep cool. P403+P235

Precautionary statements - disposal

P501 Dispose of contents/container in accordance with local/regional/national/international

regulations.

2.3 Other hazards

According to the results of its assessment, this substance is not a PBT or a vPvB.

Vapour heavier than air, may form an explosive mixture in air: it may be ignited at some distance away from the spill resulting in flashbacks. Flowing product can create electrostatic charge, resulting sparks may ignite or cause an explosion.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Name of substance 1,2,4-trimethylbenzene Registration number (REACH) 01-2119472135-42-xxxx

EC number 202-436-9 CAS number 95-63-6

Index No

Molecular formula C9H12

SECTION 4: FIRST AID MEASURES

4.1 Description of first aid measures

General notes

Do not leave affected person unattended. Remove victim out of the danger area. Keep affected person warm, still and covered. Take off immediately all contaminated clothing. In all cases of doubt, or when symptoms persist, seek medical advice. In case of unconsciousness place person in the recovery position. Never give anything by mouth.

Following inhalation

If breathing is irregular or stopped, immediately seek medical assistance and start first aid actions. Provide fresh air.

Following skin contact

Wash with plenty of soap and water.

Following eye contact

Irrigate copiously with clean, fresh water, holding the eyelids apart. Remove contact lenses, if present and easy to do. Continue rinsing. In all cases of doubt, or when symptoms persist, seek medical advice.

Following ingestion

Do NOT induce vomiting. Rinse mouth with water (only if the person is conscious).

4.2 Most important symptoms and effects, both acute and delayed

Choking and suffocation risks. Deficits in perception and coordination, reaction time, or sleepiness.

4.3 Indication of any immediate medical attention and special treatment needed

none

SECTION 5: FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

carbon dioxide (CO2), BC-powder, foam, alcohol resistant foam, water mist

Unsuitable extinguishing media

water jet

5.2 Special hazards arising from the substance or mixture

Solvent vapours are heavier than air and may spread along floors. In case of insufficient ventilation and/or in use, may form flammable/explosive vapour-air mixture. May produce toxic fumes of carbon monoxide if burning.

Hazardous combustion products

carbon monoxide (CO), carbon dioxide (CO2)



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

5.3 Advice for firefighters

Wear breathing apparatus if exposed to vapours/dust/spray/gases. Co-ordinate firefighting measures to the fire surroundings. Do not allow firefighting water to enter drains or water courses. Collect contaminated firefighting water separately. Fight fire with normal precautions from a reasonable distance. Keep containers cool with water spray.

SECTION 6: ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures For non-emergency personnel

Remove persons to safety. Avoid inhaling sprayed product. Wearing of suitable protective equipment (including personal protective equipment referred to under Section 8 of the safety data sheet) to prevent any contamination of skin, eyes and personal clothing. Remove/take off immediately all contaminated clothing and wash it before reuse.

For emergency responders

Wear breathing apparatus if exposed to vapours/dust/spray/gases.

6.2 Environmental precautions

Keep away from drains, surface and ground water. Retain contaminated washing water and dispose of it. If substance has entered a water course or sewer, inform the responsible authority.

6.3 Methods and material for containment and cleaning up

Advices on how to contain a spill

Covering of drains.

Advices on how to clean up a spill

Wipe up with absorbent material (e.g. cloth, fleece). Collect spillage (sawdust., kieselgur (diatomite), sand, universal binder).

Appropriate containment techniques

Use of adsorbent materials. - covering of drains

Other information relating to spills and releases

Place in appropriate containers for disposal. Ventilate affected area.

6.4 Reference to other sections

Hazardous combustion products: see section 5. Personal protective equipment: see section 8. Incompatible materials: see section 10. Disposal considerations: see section 13.

SECTION 7: HANDLING AND STORAGE

7.1 Precautions for safe handling

Recommendations

• Measures to prevent fire as well as aerosol and dust generation

Use only in well-ventilated areas. Use local and general ventilation. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools.

Warning

Vapours are heavier than air, spread along floors and form explosive mixtures with air.

Advice on general occupational hygiene

Wash hands after use. Do not eat, drink and smoke in work areas. Remove contaminated clothing and protective equipment before entering eating areas. Never keep food or drink in the vicinity of chemicals. Never place chemicals in containers that are normally used for food or drink. Keep away from food, drink and animal feedingstuffs.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

Conditions for safe storage, including any incompatibilities

Managing of associated risks

Explosive atmospheres

Keep container tightly closed and in a well-ventilated place. Use local and general ventilation. Keep cool. Protect from sunlight.

• Flammability hazards

Keep away from sources of ignition - No smoking. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Take precautionary measures against static discharge. Protect from sunlight.

Incompatible substances or mixtures

Observe hints for combined storage.

Consideration of other advice

· Ventilation requirements

Keep any substance that emits harmful vapours or gases in a place that allows these to be permanently extracted. Use local and general ventilation. Ground/bond container and receiving equipment.

Packaging compatibilities

Only packagings which are approved (e.g. acc. to ADR) may be used.

Suitable materials and coatings for container/equipment: Carbon Steel, Stainless Steel, Polyester, Polytetrafluoroethylene (PTFE), Polyvinyl Alcohol (PVA)

Unsuitable Materials and Coatings for container/equipment: Butyl Rubber, Natural Rubber, Ethylene-propylene-diene monomer (EPDM), Polystyrene, Polyethylene, Polyacrylonetrile.

7.3 Specific end use(s)

See attached exposure scenarios

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 **Control parameters**

National limit values

Occupational exposure limit values (Workplace Exposure Limits)

Coun try	Name of agent	CAS No	Identifier	TWA [ppm]	TWA [mg/m³]	STEL [ppm]	STEL [mg/m³]	Source
DE	1,2,4-trimethylbenzene	95-63-6	AGW	20	100	40	200	TRGS 900
EU	1,2,4-trimethylbenzene	95-63-6	IOELV	20	100			2017/164/ EU
GB	aromatics	95-63-6	WEL		500			EH40/200 5
IE	1,2,4-trimethylbenzene	95-63-6	OELV	20	100			S.I. No. 619 of 2001

Notation

TWA

Short-term exposure limit: a limit value above which exposure should not occur and which is related to a 15-minute period **STEL**

unless otherwise specified.

Time-weighted average (long-term exposure limit): measured or calculated in relation to a reference period of 8 hours timeweighted average.

Relevant DNELs/DMELs/PNECs and other threshold levels



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

· human health values

Endpoint	Threshold level	Protection goal, route of exposure	Used in	Exposure time	
DNEL	100 mg/m ³	human, inhalatory	worker (industry)	acute - local effects	
DNEL	100 mg/m ³	human, inhalatory	worker (industry)	acute - systemic effects	
DNEL	100 mg/m ³	human, inhalatory	worker (industry)	chronic - local effects	
DNEL	16,171 mg/kg	human, dermal	worker (industry)	chronic - systemic effects	
DNEL	100 mg/m ³	human, inhalatory	worker (industry)	chronic - systemic effects	
DNEL	29.4 mg/m ³	human, inhalatory	consumer (private households)	acute - systemic effects	
DNEL	29.4 mg/m ³	human, inhalatory	consumer (private households)	chronic - local effects	
DNEL	15 mg/kg	human, oral	consumer (private households)	chronic - systemic effects	
DNEL	9,512 mg/kg	human, dermal	consumer (private households)	chronic - systemic effects	
DNEL	29.4 mg/m ³	human, inhalatory	consumer (private households)	chronic - systemic effects	

environmental values

End- point	Threshold level	Organism	Environmental compart- ment	Exposure time
PNEC	0.12 ^{mg} / _l	aquatic organisms	freshwater	short-term (single instance)
PNEC	0.12 ^{mg} / _l	aquatic organisms	marine water	short-term (single instance)
PNEC	2.41 ^{mg} / _l	microorganisms	sewage treatment plant (STP)	short-term (single instance)
PNEC	13.56 ^{mg} / _{kg}	benthic organisms	sediments	short-term (single instance)
PNEC	13.56 ^{mg} / _{kg}	pelagic organisms	sediments	short-term (single instance)
PNEC	2.34 ^{mg} / _{kg}	terrestrial organisms	soil	short-term (single instance)
PNEC	0.12 ^{mg} / _l	aquatic organisms	water	intermittent release

8.2 Exposure controls

Appropriate engineering controls

Technical measures and the appliance of appropriate working methods take priority over the use of personal protective equipment.

Safety and necessary control measures vary according to exposure conditions. Appropriate measures are:

Open windows, door, to allow sufficient ventilation. If this is not possible employ a fan to increase air exchange (see attached exposure scenarios).

Individual protection measures (personal protective equipment) Eye/face protection

Use safety goggle with side protection.

Skin protection

hand protection

Wear suitable gloves. Chemical protection gloves are suitable, which are tested according to EN 374.

Short-term contact with the skin: Disposable gloves

Long-term contact with the skin: Gloves with long cuffs

Check leak-tightness/impermeability prior to use.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

· type of material

NBR: acrylonitrile-butadiene rubber, FKM: fluoro-elastomer

material thickness

0.40 mm.

· breakthrough times of the glove material

>480 minutes (permeation: level 6)

· other protection measures

Take recovery periods for skin regeneration. Preventive skin protection (barrier creams/ointments) is recommended. Wash hands thoroughly after handling.

Body protection:

Suitable protective clothing: Flame resistant clothing

Suitable safety shoes: Anti static safety shoes according to EN 345 S3

Respiratory protection

For activities in enclosed areas at elevated temperatures of the substance, local extraction or explosion protected ventilation equipment is recommended. In case this is not sufficient for the intended use, then apply a suitable respiratory protection according to EN 140 type A or better (see exposure scenarios).

Environmental exposure controls

Do not empty into drains.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Appearance

Physical state liquid
Colour colourless
Odour characteristic

Other physical and chemical parameters

pH (value) not determined Melting point/freezing point -43.77 °C

Initial boiling point and boiling range 169.4 °C at 101.3 kPa Flash point 44 °C at 101.3 kPa

Explosive limits

lower explosion limit (LEL)
 upper explosion limit (UEL)
 6.4 vol%

Vapour pressure 0.3 kPa at 25 $^{\circ}$ C Density 0.88 9 /_{cm³} at 20 $^{\circ}$ C

Solubility(ies)

Water solubility 57 ^{mg}/_I at 25 °C

Partition coefficient

n-octanol/water (log KOW)

This information is not available.

Auto-ignition temperature 500 °C

Viscosity

• kinematic viscosity 0.843 mm²/s at 20 °C



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

Explosive properties

in use, may form flammable/explosive vapour-air mixture

Oxidising properties none

9.2 Other information

SECTION 10: STABILITY AND REACTIVITY

10.1 Reactivity

risk of ignition

if heated

risk of ignition

10.2 Chemical stability

The material is stable under normal ambient and anticipated storage and handling conditions of temperature and pressure (see below "Conditions to avoid").

10.3 Possibility of hazardous reactions

No known hazardous reactions.

10.4 Conditions to avoid

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Hints to prevent fire or explosion

Use only non-sparking tools.

10.5 Incompatible materials

oxidisers

10.6 Hazardous decomposition products

No known hazardous decomposition products.

SECTION 11: TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Classification according to GHS (1272/2008/EC, CLP)

Acute toxicity

Harmful if inhaled.

• Acute toxicity estimate (ATE)

inhalation: vapour 11 ^{mg}/_l/4h

Exposure route	Endpoint	Value	Species
oral	LD50	6,000 ^{mg} / _{kg}	rat

Skin corrosion/irritation

Causes skin irritation.

Serious eye damage/eye irritation

Causes serious eye irritation.

Respiratory or skin sensitisation

Shall not be classified as a respiratory or skin sensitiser.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

Summary of evaluation of the CMR properties

Shall not be classified as germ cell mutagenic, carcinogenic nor as a reproductive toxicant.

Specific target organ toxicity (STOT)

Specific target organ toxicity - single exposure

May cause respiratory irritation.

• Specific target organ toxicity - repeated exposure

Shall not be classified as a specific target organ toxicant (repeated exposure).

Aspiration hazard

May be fatal if swallowed and enters airways.

Information on likely routes of exposure

If on skin. If inhaled.

SECTION 12: ECOLOGICAL INFORMATION

12.1 Toxicity

Aquatic toxicity (acute)

Endpoint	Value	Species	Exposure time
LC50	7.72 ^{mg} / _l	fish	96 h
EC50	2.356 ^{mg} / _I	algae	96 h

Aquatic toxicity (chronic)

May cause long-term adverse effects in the aquatic environment.

12.2 Persistence and degradability

Data are not available.

12.3 Bioaccumulative potential

Data are not available.

BCF 243

12.4 Mobility in soil

Data are not available.

12.5 Results of PBT and vPvB assessment

According to the results of its assessment, this substance is not a PBT or a vPvB.

12.6 Other adverse effects

Data are not available.

SECTION 13: DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Waste treatment-relevant information

Solvent reclamation/regeneration.

Sewage disposal-relevant information

Do not empty into drains.

Waste treatment of containers/packagings

Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

List of wastes

Proposed waste code(s) for the used product:

07 01 04x Other organic solvents, washing liquids and mother liquors

Remarks

Please consider the relevant national or regional provisions. Waste shall be separated into the categories that can be handled separately by the local or national waste management facilities.

SECTION 14: TRANSPORT INFORMATION

14.1 UN number **1993**

14.2 UN proper shipping name FLAMMABLE LIQUID, N.O.S.

Technical name 1,2,4-trimethylbenzene

14.3 Transport hazard class(es)

Class 3 (flammable liquids)

14.4 Packing group III (substance presenting low danger)

14.5 Environmental hazards hazardous to the aquatic environment

14.6 Special precautions for user

Provisions for dangerous goods (ADR) should be complied within the premises.

14.7 Transport in bulk according to Annex II of MARPOL and the IBC Code

The cargo is not intended to be carried in bulk.

Information for each of the UN Model Regulations

• Transport of dangerous goods by road, rail and inland waterway (ADR/RID/ADN)

UN number 1993

Proper shipping name FLAMMABLE LIQUID, N.O.S.

Technical name (hazardous constituents) 1,2,4-trimethylbenzene

Class 3
Classification code F1
Packing group III

Danger label(s) 3 + "fish and tree"





Environmental hazards yes (hazardous to the aquatic environment)

Special provisions (SP) 274, 601

Excepted quantities (EQ) E1

Limited quantities (LQ) 5 L

Transport category (TC) 3

Tunnel restriction code (TRC) D/E

Hazard identification No 30

Emergency Action Code 3YE

• International Maritime Dangerous Goods Code (IMDG) UN number 1993

Proper shipping name FLAMMABLE LIQUID, N.O.S.

Particulars in the shipper's declaration UN1993, FLAMMABLE LIQUID, N.O.S., (1,2,4-tri-

methylbenzene), 3, III, 44°C c.c., MARINE POLLUT-

ANT 3

Class



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)


Marine pollutant

Packing group

yes (hazardous to the aquatic environment)

Ш

3 + "fish and tree"



Special provisions (SP) 223, 274, 955

Excepted quantities (EQ) E1
Limited quantities (LQ) 5 L
EmS F-E, <u>S-E</u>
Stowage category A

• International Civil Aviation Organization (ICAO-IATA/DGR)

UN number 1993

Proper shipping name Flammable liquid, n.o.s.

Class 3

Environmental hazards yes (hazardous to the aquatic environment)

Packing group III
Danger label(s) 3



Special provisions (SP)

Excepted quantities (EQ)

Limited quantities (LQ)

A3

E1

10 L

SECTION 15: REGULATORY INFORMATION

- 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture Relevant provisions of the European Union (EU)
 - Restrictions according to REACH, Annex XVII

Name of substance	CAS No	Wt%	Type of registration	No
1,2,4-trimethylbenzene		100	1907/2006/EC annex XVII	3
1,2,4-trimethylbenzene		100	1907/2006/EC annex XVII	40

• List of substances subject to authorisation (REACH, Annex XIV)

not listed

• 2012/18/EU (Seveso III)

No	Dangerous substance/hazard categories	Qualifying quantity (to tion of lower and upp	nnes) for the applica- er-tier requirements	Notes
E2	environmental hazards (hazardous to the aquatic environment, cat. 2)	200	500	57)

Notation

57) Hazardous to the Aquatic Environment in category Chronic 2.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Revision: 13.10.2017 Replaces version of: 25.02.2016 (GHS 1)

• Limitation of emissions of volatile organic compounds due to the use of organic solvents in certain paints and varnishes and vehicle refinishing products (2004/42/EC, Deco-Paint Directive)

VOC content 100 %

• Directive on industrial emissions (VOCs, 2010/75/EU)

VOC content 100 %

• Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS) - Annex II

not listed

• Regulation 166/2006/EC concerning the establishment of a European Pollutant Release and Transfer Register (PRTR)

not listed

• Directive 2000/60/EC establishing a framework for Community action in the field of water policy (WFD)

not listed

National inventories

Country	Inventory	Status
AU	AICS	substance is listed
CA	DSL	substance is listed
CN	IECSC	substance is listed
EU	ECSI	substance is listed
EU	REACH Reg.	substance is listed
JP	CSCL-ENCS	substance is listed
KR	KECI	substance is listed
MX	INSQ	substance is listed
NZ	NZIoC	substance is listed
PH	PICCS	substance is listed
TR	CICR	substance is listed
TW	TCSI	substance is listed
US	TSCA	substance is listed

Legend

AICS Australian Inventory of Chemical Substances.
CICR Chemical Inventory and Control Regulation.

CSCL-ENCS List of Existing and New Chemical Substances (CSCL-ENCS).

DSL Domestic Substances List (DSL).

ECSI EC Substance Inventory (EINECS, ELINCS, NLP).

IECSC Inventory of Existing Chemical Substances Produced or Imported in China.

INSQ National Inventory of Chemical Substances.
KECI Korea Existing Chemicals Inventory.
NZIOC New Zealand Inventory of Chemicals.

PICCS Philippine Inventory of Chemicals and Chemical Substances.

REACH Reg. REACH registered substances.
TCSI Taiwan Chemical Substance Inventory.

TSCA Toxic Substance Control Act.



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

15.2 Chemical Safety Assessment

For this substance a chemical safety assessment has been carried out.

SECTION 16: OTHER INFORMATION

16.1 Indication of changes (revised safety data sheet)

Section	Former entry (text/value)	Actual entry (text/value)
1.3	Competent person responsible for the safety data sheet: Christian Knappe	Competent person responsible for the safety data sheet: Vanessa Manz
1.4		Poison centre: change in the listing (table)
2.2		Precautionary statements - prevention: change in the listing (table)
2.2		Precautionary statements - disposal: change in the listing (table)
6.2	Environmental precautions: Keep away from drains, surface and ground water. Retain contaminated washing water and dispose of it.	Environmental precautions: Keep away from drains, surface and ground water. Retain contaminated washing water and dispose of it. If substance has entered a water course or sewer, inform the responsible authority.
8.1		Occupational exposure limit values (Workplace Exposure Limits): change in the listing (table)
11.1		Information on likely routes of exposure: If on skin. If inhaled.
15.1		Restrictions according to REACH, Annex XVII: change in the listing (table)
15.1		National inventories: change in the listing (table)
16		Abbreviations and acronyms: change in the listing (table)
16	Key literature references and sources for data: - Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU - Regulation (EC) No. 1272/2008 (CLP, EU GHS) - See attached exposure scenarios http://www.dhc-solvent.de/dhc_sdbreach.html http://www.dhc-solvent.de/en/dhc_sdbreach.html Transport of dangerous goods by road, rail and inland waterway (ADR/RID/ADN). International Maritime Dangerous Goods Code (IMDG). International Air Transport Association (IATA).	Key literature references and sources for data: - Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU - Regulation (EC) No. 1272/2008 (CLP, EU GHS) - The exposure scenarios are available at www.dhc-solvent.de in the Service section. Transport of dangerous goods by road, rail and inland waterway (ADR/RID/ADN). International Maritime Dangerous Goods Code (IMDG). International Air Transport Association (IATA).
16		Disclaimer: This information is based upon the present state of our knowledge. This SDS has been compiled and is solely intended for this product. The information concerning legal regulations can lay no claim to completeness. In addition to this, other provisions may also apply to the product.

Abbreviations and acronyms

Abbr.	Descriptions of used abbreviations
2017/164/EU	Comission Directive establishing a fourth list of indicative occupational exposure limit values pursuant to Council Directive 98/24/EC, and amending Commission Directives 91/322/EEC, 2000/39/EC and 2009/161/EU
ADN	Accord européen relatif au transport international des marchandises dangereuses par voies de navigation intérieures (European Agreement concerning the International Carriage of Dangerous Goods by Inland Waterways)
ADR	Accord européen relatif au transport international des marchandises dangereuses par route (European Agreement concerning the International Carriage of Dangerous Goods by Road)
AGW	Workplace exposure limit



Safety Data Sheet according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

Abbr.	Descriptions of used abbreviations
BCF	Bioconcentration factor
CAS	Chemical Abstracts Service (service that maintains the most comprehensive list of chemical substances)
CLP	Regulation (EC) No 1272/2008 on classification, labelling and packaging of substances and mixtures
CMR	Carcinogenic, Mutagenic or toxic for Reproduction
DGR	Dangerous Goods Regulations (see IATA/DGR)
DMEL	Derived Minimal Effect Level
DNEL	Derived No-Effect Level
EH40/2005	EH40/2005 Workplace exposure limits (http://www.nationalarchives.gov.uk/doc/open-government-licence/)
EINECS	European Inventory of Existing Commercial Chemical Substances
ELINCS	European List of Notified Chemical Substances
EmS	Emergency Schedule
GHS	"Globally Harmonized System of Classification and Labelling of Chemicals" developed by the United Nations
IATA	International Air Transport Association
IATA/DGR	Dangerous Goods Regulations (DGR) for the air transport (IATA)
ICAO	International Civil Aviation Organization
IMDG	International Maritime Dangerous Goods Code
index No	The Index number is the identification code given to the substance in Part 3 of Annex VI to Regulation (EC) No 1272/2008
IOELV	Indicative occupational exposure limit value
MARPOL	International Convention for the Prevention of Pollution from Ships (abbr. of "Marine Pollutant")
NLP	No-Longer Polymer
PBT	Persistent, Bioaccumulative and Toxic
PNEC	Predicted No-Effect Concentration
ppm	Parts per million
REACH	Registration, Evaluation, Authorisation and Restriction of Chemicals
RID	Règlement concernant le transport International ferroviaire des marchandises Dangereuses (Regulations concerning the International carriage of Dangerous goods by Rail)
S.I. No. 619 of 2001	Safety, Health and Welfare at Work (Chemical Agents) Regulations 2001
STEL	Short-term exposure limit
TRGS 900	Arbeitsplatzgrenzwerte (TRGS 900)
TWA	Time-weighted average
VOC	Volatile Organic Compounds
vPvB	Very Persistent and very Bioaccumulative
WEL	Workplace exposure limit



according to Regulation (EC) No. 1907/2006 (REACH)

1,2,4-trimethylbenzene

Version number: GHS 2.0 Replaces version of: 25.02.2016 (GHS 1)

Key literature references and sources for data

- Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU Regulation (EC) No. 1272/2008 (CLP, EU GHS)
 The exposure scenarios are available at www.dhc-solvent.de in the Service section.

Transport of dangerous goods by road, rail and inland waterway (ADR/RID/ADN). International Maritime Dangerous Goods Code (IMDG). International Air Transport Association (IATA).

List of relevant phrases (code and full text as stated in chapter 2 and 3)

Code	Text
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H335	May cause respiratory irritation.
H411	Toxic to aquatic life with long lasting effects.

Disclaimer

This information is based upon the present state of our knowledge. This SDS has been compiled and is solely intended for this product. The information concerning legal regulations can lay no claim to completeness. In addition to this, other provisions may also apply to the product.



SAFETY DATA SHEET

Creation Date 26-Sep-2009 Revision Date 18-Jan-2018 **Revision Number 4**

1. Identification

Product Name Mesitylene

Cat No.: AC161320000; AC161320010; AC161320025; AC161320050;

AC161322500

CAS-No 108-67-8

Synonyms 1,3,5-Trimethylbenzene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Acros Organics Fisher Scientific One Reagent Lane One Reagent Lane Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number US:001-201-796-7100 / Europe: +32 14 57 52 99 CHEMTREC Tel. No.US:001-800-424-9300 / Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Category 3 Flammable liquids Skin Corrosion/Irritation Category 2 Serious Eye Damage/Eye Irritation Category 2 Specific target organ toxicity (single exposure) Category 3 Target Organs - Respiratory system, Central nervous system (CNS).

Aspiration Toxicity Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Flammable liquid and vapor

May be fatal if swallowed and enters airways

Mesitylene Revision Date 18-Jan-2018

Causes skin irritation
Causes serious eye irritation
May cause respiratory irritation
May cause drowsiness or dizziness



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling

Wear protective gloves/protective clothing/eye protection/face protection

Do not breathe dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Keep cool

Response

Get medical attention/advice if you feel unwell

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Call a POISON CENTER or doctor/physician if you feel unwell

Skin

If skin irritation occurs: Get medical advice/attention

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Wash contaminated clothing before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Do NOT induce vomiting

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposa

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Toxic to aquatic life with long lasting effects

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
1,3,5-Trimethylbenzene	108-67-8	97-99

Mesitylene Revision Date 18-Jan-2018

4. First-aid measures

General Advice If symptoms persist, call a physician.

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

clothes and shoes. Get medical attention.

Inhalation Remove to fresh air. If breathing is difficult, give oxygen. Get medical attention. Risk of

serious damage to the lungs (by aspiration).

Ingestion Clean mouth with water and drink afterwards plenty of water. Do NOT induce vomiting. Call

a physician or poison control center immediately. If vomiting occurs naturally, have victim

lean forward.

Most important symptoms and

effects

. Difficulty in breathing. Vapors may cause drowsiness and dizziness: Symptoms may be

delayed: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and

vomiting

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Water spray, carbon dioxide (CO2), dry chemical, alcohol-resistant foam. Water mist may

be used to cool closed containers.

Unsuitable Extinguishing Media No information available

Flash Point 44 °C / 111.2 °F

Method - No information available

Autoignition Temperature 550 °C / 1022 °F

Explosion Limits

Upper 6.00% **Lower** 1.00%

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Containers may explode when heated. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO₂).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

HealthFlammabilityInstabilityPhysical hazards320N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment as required. Remove all

sources of ignition. Take precautionary measures against static discharges.

Revision Date 18-Jan-2018 Mesitylene

Environmental Precautions

Do not flush into surface water or sanitary sewer system. See Section 12 for additional Ecological Information. Avoid release to the environment, Collect spillage.

Methods for Containment and Clean Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment. Take precautionary measures against static discharges.

7. Handling and storage

Handling

Wear personal protective equipment/face protection. Ensure adequate ventilation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. Take precautionary measures against static discharges. Use spark-proof tools and explosion-proof equipment.

Storage

Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat, sparks and flame. Flammables area.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
1,3,5-Trimethylbenzene			TWA: 25 ppm	
			TWA: 125 mg/m ³	

Legend

NIOSH IDLH: NIOSH - National Institute for Occupational Safety and Health

Engineering Measures Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations

and safety showers are close to the workstation location. Use explosion-proof

electrical/ventilating/lighting/equipment.

Personal Protective Equipment

Tight sealing safety goggles. Face protection shield. **Eye/face Protection**

Wear appropriate protective gloves and clothing to prevent skin exposure. Skin and body protection

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

9. Physical and chemical properties

Physical State Liquid **Appearance** Colorless Odor aromatic

Odor Threshold No information available No information available Melting Point/Range -45 °C / -49 °F

Boiling Point/Range 163 - 166 °C / 325.4 - 330.8 °F @ 760 mmHg

44 °C / 111.2 °F Flash Point **Evaporation Rate** No information available

Flammability (solid, gas) Not applicable

Flammability or explosive limits

6.00% Upper

Mesitylene Revision Date 18-Jan-2018

Lower 1.00%

Vapor Pressure2.5 mbar @ 20 °CVapor Density4.1 (Air = 1.0)Specific Gravity0.868Solubilityslightly soluble

Partition coefficient; n-octanol/water

No data available

Autoignition Temperature

No data available

550 °C / 1022 °F

Decomposition Temperature

No information available

No information available

Molecular Formula C9 H12 Molecular Weight 120.19

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products. Excess heat. Keep away from open flames, hot surfaces and

sources of ignition.

Incompatible Materials Strong oxidizing agents, Nitric acid

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous ReactionsNone under normal processing.

11. Toxicological information

Acute Toxicity

Product InformationNo acute toxicity information is available for this product

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
1,3,5-Trimethylbenzene	LD50 = 5000 mg/kg (Rat)	Not listed	LC50 = 24 g/m ³ (Rat) 4 h

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Irritating to eyes, respiratory system and skin

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
1,3,5-Trimethylbenzen	108-67-8	Not listed				
е						

Mutagenic Effects Not mutagenic in AMES Test

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system Central nervous system (CNS)

STOT - repeated exposure None known

Revision Date 18-Jan-2018 Mesitylene

Category 1 **Aspiration hazard**

Symptoms / effects,both acute and Vapors may cause drowsiness and dizziness: Symptoms may be delayed: Symptoms of

delayed

overexposure may be headache, dizziness, tiredness, nausea and vomiting

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
1,3,5-Trimethylbenzene	Not listed	LC50: = 3.48 mg/L, 96h (Pimephales promelas)	Not listed	EC50: = 50 mg/L, 24h (Daphnia magna)

Persistence and Degradability Soluble in water Persistence is unlikely based on information available.

Bioaccumulation/ Accumulation No information available.

Mobility Will likely be mobile in the environment due to its water solubility.

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN2325

Proper Shipping Name 1,3,5-TRIMETHYLBENZENE

Hazard Class 3 Ш **Packing Group**

TDG

UN2325 **UN-No**

Proper Shipping Name 1,3,5-TRIMETHYLBENZENE

Hazard Class Packing Group Ш

IATA

UN-No UN2325

Proper Shipping Name 1,3,5-TRIMETHYLBENZENE

Hazard Class Packing Group

Ш

IMDG/IMO **UN-No**

UN2325

Proper Shipping Name 1,3,5-TRIMETHYLBENZENE

Hazard Class Packing Group Ш

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
1,3,5-Trimethylbenzene	108-67-8	Х	ACTIVE	-

Mesitylene Revision Date 18-Jan-2018

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed '-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
1,3,5-Trimethylbenzene	108-67-8	Х	-	203-604-4	Х	X	Х	Х	KE-34411

U.S. Federal Regulations

SARA 313 Not applicable

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA Not applicable

California Proposition 65 This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
1,3,5-Trimethylbenzene	Χ	=	=	=	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade Moderate risk, Grade 2

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 26-Sep-2009

 Revision Date
 18-Jan-2018

 Print Date
 18-Jan-2018

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard

Mesitylene Revision Date 18-Jan-2018

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Creation Date 05-May-2009 Revision Date 18-Jan-2018 Revision Number 3

1. Identification

Product Name 1,4-Dioxane

Cat No.: D111-4; D111-4LC; D111-500; D56S-4; D116-4; D116-200

CAS-No 123-91-1 Synonyms Diox

Recommended Use Laboratory chemicals.

Uses advised against Not for food, drug, pesticide or biocidal product use

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids

Serious Eye Damage/Eye Irritation

Category 2
Carcinogenicity

Category 2
Specific target organ toxicity (single exposure)

Category 3
Target Organs - Respiratory system, Central nervous system (CNS), Eyes.
Specific target organ toxicity - (repeated exposure)

Category 2

Category 2

Target Organs - Kidney, Liver.

Label Elements

Signal Word

Danger

Hazard Statements

Highly flammable liquid and vapor Causes serious eye irritation May cause respiratory irritation

May cause drowsiness or dizziness

May cause cancer

May cause damage to organs through prolonged or repeated exposure

1,4-Dioxane Revision Date 18-Jan-2018



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Wash face, hands and any exposed skin thoroughly after handling

Wear eye/face protection

Do not breathe dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Keep cool

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Eves

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

May form explosive peroxides

Repeated exposure may cause skin dryness or cracking

WARNING. Cancer - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
1,4-Dioxane	123-91-1	>95

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.

Immediate medical attention is required.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Immediate medical

attention is required.

Revision Date 18-Jan-2018 1.4-Dioxane

Inhalation Move to fresh air. If breathing is difficult, give oxygen. Do not use mouth-to-mouth method if

victim indested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Immediate

medical attention is required.

Do not induce vomiting. Call a physician or Poison Control Center immediately. Ingestion

Most important symptoms and

effects

Notes to Physician

Breathing difficulties. Inhalation of high vapor concentrations may cause symptoms like

headache, dizziness, tiredness, nausea and vomiting

Treat symptomatically

Fire-fighting measures

Suitable Extinguishing Media Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide. Cool closed

containers exposed to fire with water spray.

Unsuitable Extinguishing Media Water may be ineffective

Flash Point 12 °C / 53.6 °F

No information available Method -

355 °C / 671 °F **Autoignition Temperature**

Explosion Limits

22% Upper Lower 2%

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Risk of ignition. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Containers may explode when heated. May form explosive peroxides. Vapors may form explosive mixtures with air.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO2) peroxides

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
2	3	1	N/A

6. Accidental release measures

Remove all sources of ignition. Use personal protective equipment. Take precautionary **Personal Precautions**

measures against static discharges. Do not get in eyes, on skin, or on clothing. Ensure

adequate ventilation.

Environmental Precautions Should not be released into the environment. See Section 12 for additional ecological

information.

Up

Methods for Containment and Clean Remove all sources of ignition. Soak up with inert absorbent material. Take precautionary measures against static discharges. Keep in suitable, closed containers for disposal. Use

spark-proof tools and explosion-proof equipment.

7. Handling and storage

Handling

Wear personal protective equipment. Ensure adequate ventilation. Handle under an inert atmosphere. Keep away from open flames, hot surfaces and sources of ignition. Do not breathe vapors or spray mist. Do not get in eyes, on skin, or on clothing. Take precautionary measures against static discharges. If peroxide formation is suspected, do

1,4-Dioxane Revision Date 18-Jan-2018

not open or move container. Use only non-sparking tools. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded. Wash hands before breaks and immediately after handling the product.

before breaks and immediately after nandling the product

Storage Keep containers tightly closed in a dry, cool and well-ventilated place. Store under an inert

atmosphere. Flammables area. May form explosive peroxides. Containers should be dated when opened and tested periodically for the presence of peroxides. Should crystals form in a peroxidizable liquid, peroxidation may have occurred and the product should be considered extremely dangerous. In this instance, the container should only be opened

remotely by professionals. Keep away from heat and sources of ignition.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
1,4-Dioxane	TWA: 20 ppm	(Vacated) TWA: 25 ppm	IDLH: 500 ppm	TWA: 25 ppm
	Skin	(Vacated) TWA: 90 mg/m ³	Ceiling: 1 ppm	TWA: 90 mg/m ³
		Skin	Ceiling: 3.6 mg/m ³	STEL: 100 ppm
		TWA: 100 ppm		STEL: 360 mg/m ³
		TWA: 360 mg/m ³		

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures Ensure adequate ventilation, especially in confined areas. Use explosion-proof

electrical/ventilating/lighting/equipment. Ensure that eyewash stations and safety showers

are close to the workstation location.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Long sleeved clothing.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateLiquidAppearanceColorless

Odor Petroleum distillates
Odor Threshold No information available
pH 6-8 500 g/l ag.sol

Melting Point/Range 12 °C / 53.6 °F

Boiling Point/Range 101 °C / 213.8 °F @ 760 mmHg

Flash Point 12 °C / 53.6 °F
Evaporation Rate No information available

Flammability (solid,gas)
Flammability or explosive limits

 Upper
 22%

 Lower
 2%

Not applicable

1,4-Dioxane Revision Date 18-Jan-2018

Vapor Pressure 41 mbar @ 20 °C

Vapor Density 3 Specific Gravity 1.034

Solubility

Partition coefficient; n-octanol/water

Autoignition Temperature

Decomposition Temperature

Viscosity

Soluble in water

No data available

355 °C / 671 °F

No information available

1.32 mPa.s @ 20 °C

Molecular FormulaC4 H8 O2Molecular Weight88.11

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability May form explosive peroxides. Hygroscopic.

Conditions to Avoid Incompatible products. Heat, flames and sparks. Exposure to air or moisture over prolonged

periods. Keep away from open flames, hot surfaces and sources of ignition.

Incompatible Materials Strong oxidizing agents, Reducing agents, Halogens

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2), peroxides

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions May form explosive peroxides.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
1,4-Dioxane	5170 mg/kg (Rat)	LD50 = 7600 mg/kg (Rabbit)	48.5 mg/L (Rat) 4 h
	4200 mg/kg (Rat)		

Toxicologically Synergistic

Products

Acetonitrile: Tetrachloroethylene

Irritation Irritating to eyes, respiratory system and skin

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
1,4-Dioxane	123-91-1	Group 2B	Reasonably	A3	Х	Not listed
		·	Anticipated			

IARC: (International Agency for Research on Cancer) IARC: (International Agency for Research on Cancer)

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans Group 2B - Possibly Carcinogenic to Humans

NTP: (National Toxicity Program)

NTP: (National Toxicity Program)

Known - Known Carcinogen

Reasonably Anticipated - Reasonably Anticipated to be a Human

Carcinogen

ACGIH: (American Conference of Governmental Industrial

Hygienists)

A1 - Known Human Carcinogen A2 - Suspected Human Carcinogen

A3 - Animal Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

Revision Date 18-Jan-2018 1,4-Dioxane

Mutagenic Effects No information available

No information available. **Reproductive Effects**

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system Central nervous system (CNS) Eyes

STOT - repeated exposure Kidney Liver

Aspiration hazard No information available

delayed

Symptoms / effects,both acute and Inhalation of high vapor concentrations may cause symptoms like headache, dizziness,

tiredness, nausea and vomiting

No information available **Endocrine Disruptor Information**

Other Adverse Effects See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
1,4-Dioxane	Not listed	LC50: = 9850 mg/L, 96h	EC50 = 610 mg/L 5 min	EC50 = 163 mg/L 48h
		(Pimephales promelas)	EC50 = 668 mg/L 15 min	_
		LC50: 10306 - 14742 mg/L,	EC50 = 733 mg/L 30 min	
		96h static (Pimephales	_	
		promelas)		
		LC50: = 9850 mg/L, 96h		
		flow-through (Pimephales		
		promelas)		
		LC50: > 10000 mg/L, 96h		
		semi-static (Lepomis		
		macrochirus)		
		LC50: > 10000 mg/L, 96h		
		static (Lepomis macrochirus)		

Persistence and Degradability Soluble in water Persistence is unlikely based on information available.

Bioaccumulation/ Accumulation No information available.

Mobility . Will likely be mobile in the environment due to its water solubility.

Component	log Pow
1,4-Dioxane	-0.42

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes	
1,4-Dioxane - 123-91-1	U108	-	

14. Transport information

DOT

UN-No UN1165 **Proper Shipping Name** DIOXANE

Revision Date 18-Jan-2018 1,4-Dioxane

Hazard Class 3 Ш

Packing Group

TDG

UN-No UN1165 **Proper Shipping Name** DIOXANE

Hazard Class Packing Group Ш

IATA

UN-No UN1165 **Proper Shipping Name** DIOXANE

Hazard Class Packing Group

IMDG/IMO

UN-No UN1165 **Proper Shipping Name** DIOXANE

Hazard Class Packing Group Ш

15. Regulatory information

International Inventories

	Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Ī	1,4-Dioxane	Х	Х	-	204-661-8	-		Χ	Χ	Χ	Х	Χ

Legend:

X - Listed

- E Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.
- F Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
- N Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
- P Indicates a commenced PMN substance
- R Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
- S Indicates a substance that is identified in a proposed or final Significant New Use Rule
- T Indicates a substance that is the subject of a Section 4 test rule under TSCA.
- XU Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).
- Y1 Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.
- Y2 Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

Not applicable **TSCA 12(b)**

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
1,4-Dioxane	123-91-1	>95	0.1

See section 2 for more information SARA 311/312 Hazard Categories

CWA (Clean Water Act) Not applicable

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
1,4-Dioxane	X		-

OSHA Occupational Safety and Health Administration

Not applicable

CERCLA This material, as supplied, contains one or more substances regulated as a hazardous

substance under the Comprehensive Environmental Response Compensation and Liability

1,4-Dioxane Revision Date 18-Jan-2018

Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
1,4-Dioxane	100 lb	-

California Proposition 65

This product contains the following proposition 65 chemicals

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
1,4-Dioxane	123-91-1	Carcinogen	30 μg/day	Carcinogen

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
1,4-Dioxane	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): Y
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade Serious risk, Grade 3

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 05-May-2009

 Revision Date
 18-Jan-2018

 Print Date
 18-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Creation Date 04-Jun-2010 Revision Date 19-Jan-2018 Revision Number 3

1. Identification

Product Name Acenaphthene

Cat No.: AC201340000; AC201340050; AC201341000; AC201345000

CAS-No 83-32-9

Synonyms 1,2-Dihydroacenaphthylene; Naphthyleneethylene; 1,8-Ethylenenaphthalene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin Corrosion/Irritation Category 2
Serious Eye Damage/Eye Irritation Category 2
Specific target organ toxicity (single exposure) Category 3

Target Organs - Respiratory system.

Label Elements

Signal Word

Warning

Hazard Statements

Causes skin irritation
Causes serious eye irritation
May cause respiratory irritation

•



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling Wear protective gloves/protective clothing/eye protection/face protection Avoid breathing dust/fume/gas/mist/vapors/spray Use only outdoors or in a well-ventilated area

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing Call a POISON CENTER or doctor/physician if you feel unwell

Skin

IF ON SKIN: Wash with plenty of soap and water If skin irritation occurs: Get medical advice/attention Take off contaminated clothing and wash before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Storage

Store in a well-ventilated place. Keep container tightly closed

Store locked up

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Acenaphthene	83-32-9	>95

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

clothes and shoes. Get medical attention.

Inhalation Remove from exposure, lie down. Remove to fresh air. If not breathing, give artificial

respiration. Get medical attention.

Ingestion Clean mouth with water. Get medical attention.

Most important symptoms and

effects

No information available.

Notes to Physician Treat symptomatically

rreat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Water spray. Carbon dioxide (CO 2). Dry chemical. Chemical foam.

Unsuitable Extinguishing Media No information available

Flash Point 135 °C / 275 °F

Method - No information available

Autoignition Temperature 450 °C / 842 °F

Explosion Limits

Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Do not allow run-off from fire-fighting to enter drains or water courses.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO2).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

HealthFlammabilityInstabilityPhysical hazards210N/A

6. Accidental release measures

Personal Precautions
Environmental Precautions

Ensure adequate ventilation. Use personal protective equipment as required. Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained.

Methods for Containment and Clean Sweep up and shovel into suitable containers for disposal.

7. Handling and storage

Handling Avoid contact with skin and eyes. Do not breathe dust.

Storage Keep in a dry, cool and well-ventilated place. Refer product specification and/or product

label for specific storage temperature requirement. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure

limitsestablished by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations

and safety showers are close to the workstation location.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

·

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State Solid
Appearance Brown

Odor No information available
Odor Threshold No information available

pH Not applicable

Melting Point/Range 90 - 95 °C / 194 - 203 °F

Boiling Point/Range 279 °C / 534.2 °F Flash Point 135 °C / 275 °F Evaporation Rate Not applicable

Flammability (solid,gas) No information available

Flammability or explosive limits

Upper
Lower
No data available
No data available
Vapor Pressure
Vapor Density
Not applicable
10 mmHg @ 131 °C
Not applicable

Specific Gravity 1.060
Solubility insoluble

Partition coefficient; n-octanol/water

Autoignition Temperature

Decomposition Temperature

No data available
450 °C / 842 °F
No information available

Viscosity
Not applicable
C12 H10

Molecular FormulaC12 H10Molecular Weight154.21

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Excess heat. Incompatible products.

Incompatible Materials Strong oxidizing agents, Metals, Strong acids

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous PolymerizationNo information available.

Hazardous ReactionsNone under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Acenaphthene	LD50 = 10000 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

IrritationNo information availableSensitizationNo information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Acenaphthene	83-32-9	Not listed				

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposureSTOT - repeated exposure
Respiratory system
None known

Aspiration hazard No information available

Symptoms / effects,both acute and No information available

delayed

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

The product contains following substances which are hazardous for the environment. Very toxic to aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
	EC50: 0.23 - 1.15 mg/L, 96h	LC50: 1.3 - 2.1 mg/L, 96h static (Lepomis macrochirus) LC50: = 0.509 mg/L, 96h flow-through (Pimephales promelas)	EC50 = 0.58 mg/L 15 min	EC50: 1.102 - 1.475 mg/L, 48h Static (Daphnia magna) EC50: = 3.45 mg/L, 48h (Daphnia magna) EC50: = 41 mg/L, 48h
		LC50: 0.6 - 0.75 mg/L, 96h flow-through (Oncorhynchus mykiss)		(Daphnia magna)

Persistence and Degradability May persist

Bioaccumulation/ Accumulation No information available.

Mobility Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Acenaphthene	4.43

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Technical Name Acenaphthene

Hazard Class 9
Packing Group III

TDG

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

<u>IATA</u>

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

IMDG/IMO

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Acenaphthene	83-32-9	Χ	ACTIVE	_

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Acenaphthene	83-32-9	X	1	201-469-6	Χ	X	Χ	Х	KE-10602

U.S. Federal Regulations

SARA 313 Not applicable

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Acenaphthene	83-32-9	>95	0.1

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Acenaphthene	-	-	X	X

Clean Air Act Not applicable

OSHA - Occupational Safety and Not applicable

Health Administration

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Acenaphthene	100 lb	-

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island	
Acenaphthene	Х	X	X	=	=	

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 04-Jun-2010

 Revision Date
 19-Jan-2018

 Print Date
 19-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

SAFETY DATA SHEET

Version 5.6 Revision Date 05/24/2016 Print Date 01/23/2017

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Acenaphthylene

Product Number : 416703 Brand : Aldrich

CAS-No. : 208-96-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich

3050 Spruce Street SAINT LOUIS MO 63103

USA

Telephone : +1 800-325-5832 Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 4), H302 Skin irritation (Category 2), H315 Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram

!>

Signal word Warning

Hazard statement(s)

H302 Harmful if swallowed.
H315 Causes skin irritation.

H319 Causes serious eye irritation. H335 May cause respiratory irritation.

Precautionary statement(s)

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264 Wash skin thoroughly after handling.

P270 Do not eat, drink or smoke when using this product.
P271 Use only outdoors or in a well-ventilated area.

P280 Wear eye protection/ face protection.

Aldrich - 416703 Page 1 of 8

P280 Wear protective gloves. P301 + P312 + P330 IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth. P302 + P352 IF ON SKIN: Wash with plenty of soap and water. P304 + P340 + P312 IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if vou feel unwell. P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If skin irritation occurs: Get medical advice/ attention. P332 + P313 P337 + P313 If eye irritation persists: Get medical advice/ attention. Take off contaminated clothing and wash before reuse. P362 P403 + P233 Store in a well-ventilated place. Keep container tightly closed. P405 Store locked up. P501 Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : C₁₂H₈

Molecular weight : 152.19 g/mol
CAS-No. : 208-96-8
EC-No. : 205-917-1

Hazardous components

Component	Classification	Concentration
Acenaphthylene		
	Acute Tox. 4; Skin Irrit. 2; Eye	<= 100 %
	Irrit. 2A; STOT SE 3; H302,	
	H315, H319, H335	

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

Aldrich - 416703 Page 2 of 8

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection. For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Aldrich - 416703 Page 3 of 8

Full contact

Material: Nitrile rubber

Minimum laver thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact Material: Nitrile rubber

Minimum layer thickness: 0.11 mm Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method:

EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Appearance Form: solid

b) Odour No data available Odour Threshold No data available d) рН No data available

Melting point/freezing

point

Melting point/range: 78 - 82 °C (172 - 180 °F) - lit.

Initial boiling point and

boiling range

280 °C (536 °F) - lit.

122.0 °C (251.6 °F) - closed cup Flash point

h) Evaporation rate No data available No data available Flammability (solid, gas) Upper/lower No data available

flammability or explosive limits

Vapour pressure No data available No data available Vapour density

m) Relative density 0.899 g/mL at 25 °C (77 °F)

n) Water solubility No data available Partition coefficient: n-No data available

octanol/water

Auto-ignition No data available temperature

Aldrich - 416703 Page 4 of 8 q) Decomposition No data available temperature

r) Viscosity No data availables) Explosive properties No data available

t) Oxidizing properties No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Mouse - 1,760 mg/kg

Remarks: Autonomic Nervous System:Other (direct) parasympathomimetic. Respiratory disorder Blood: Hemorrhage.

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as

probable, possible or confirmed human carcinogen by IARC.

No component of this product present at levels greater than or equal to 0.1% is identified as

probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a

carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a

Aldrich - 416703 Page 5 of 8

known or anticipated carcinogen by NTP.

No component of this product present at levels greater than or equal to 0.1% is identified as a

known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a

carcinogen or potential carcinogen by OSHA.

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

Inhalation - May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: AB1254000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III

Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Acenaphthylene)

Reportable Quantity (RQ): 5000 lbs

Aldrich - 416703 Page 6 of 8

Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Acenaphthylene	208-96-8	1993-04-24
Pennsylvania Right To Know Components		
	CAS-No.	Revision Date
Acenaphthylene	208-96-8	1993-04-24
New Jersey Right To Know Components		
	CAS-No.	Revision Date
Acenaphthylene	208-96-8	1993-04-24
California Prop. 65 Components		
WARNING! This product contains a chemical known to the	CAS-No.	Revision Date
State of California to cause cancer. Acenaphthylene	208-96-8	2007-09-28
WARNING! This product contains a chemical known to the	CAS-No.	Revision Date
State of California to cause cancer. Acenaphthylene	208-96-8	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox. Acute toxicity
Eye Irrit. Eye irritation
H302 Harmful if swallowed.

H315 Causes skin irritation. H319 Causes serious eye irritation.

H335 May cause respiratory irritation.

Skin Irrit. Skin irritation

HMIS Rating

Health hazard: 2
Chronic Health Hazard: *
Flammability: 1
Physical Hazard 0

NFPA Rating

Health hazard: 2

Aldrich - 416703 Page 7 of 8

Fire Hazard: 1
Reactivity Hazard: 0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation Product Safety – Americas Region 1-800-521-8956

Version: 5.6 Revision Date: 05/24/2016 Print Date: 01/23/2017

Aldrich - 416703 Page 8 of 8



SAFETY DATA SHEET

Creation Date 19-May-2010 Revision Date 07-Apr-2020 Revision Number 5

1. Identification

Product Name Acetophenone

Cat No. : A22-500

CAS-No 98-86-2

Synonyms Methyl Phenyl Ketone; 1-Phenylethanone; Hypnone (Certified)

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Company One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids Category 4
Acute oral toxicity Category 4
Serious Eye Damage/Eye Irritation Category 2

Label Elements

Signal Word

Warning

Hazard Statements

Combustible liquid Harmful if swallowed Causes serious eye irritation

Acetophenone



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Wear protective gloves/protective clothing/eye protection/face protection

Eves

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

Rinse mouth

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store in a well-ventilated place. Keep cool

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

None identified

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Acetophenone	98-86-2	>95

4. First-aid measures

General Advice If symptoms persist, call a physician.

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists,

call a physician.

Inhalation Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if

symptoms occur.

Ingestion Clean mouth with water and drink afterwards plenty of water.

Most important symptoms and

effects Notes to Physician tiredness, nausea and vomiting

Transfer and the second of the

Treat symptomatically

5. Fire-fighting measures

None reasonably foreseeable. Symptoms of overexposure may be headache, dizziness,

Suitable Extinguishing Media Water spray, carbon dioxide (CO2), dry chemical, alcohol-resistant foam. Water mist may

Acetophenone

be used to cool closed containers.

Unsuitable Extinguishing Media No information available

77 °C / 170.6 °F **Flash Point**

Method -No information available

Autoignition Temperature 535 °C / 995 °F

Explosion Limits

Upper 6.7 vol % 1.1 vol % Lower

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Combustible material. Containers may explode when heated. Keep product and empty container away from heat and sources of ignition. Risk of ignition.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO2).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Physical hazards Health **Flammability** Instability N/A 2 2 0

Accidental release measures

Use personal protective equipment as required. Ensure adequate ventilation. Remove all **Personal Precautions**

sources of ignition. Take precautionary measures against static discharges.

Should not be released into the environment. **Environmental Precautions**

Methods for Containment and Clean Soak up with inert absorbent material. Keep in suitable, closed containers for disposal.

Remove all sources of ignition.

7. Handling and storage

Wear personal protective equipment/face protection. Ensure adequate ventilation. Do not Handling

get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Keep away from open

flames, hot surfaces and sources of ignition.

Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from Storage

heat, sparks and flame.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Acetophenone	TWA: 10 ppm			TWA: 10 ppm

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

Engineering Measures Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations

and safety showers are close to the workstation location.

Personal Protective Equipment

Eye/face Protection Tight sealing safety goggles. Face protection shield.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateLiquidAppearanceLight yellowOdoraromatic

Odor Threshold
pHNo information available
No information availableMelting Point/Range19.6 °C / 67.3 °F

Boiling Point/Range 202 °C / 395.6 °F @ 760 mmHg

Flash Point 77 °C / 170.6 °F

Evaporation Rate No information available

Flammability (solid,gas)

Not applicable

Flammability or explosive limits

 Upper
 6.7 vol %

 Lower
 1.1 vol %

 1.2 mbor
 1.2 mbor

Vapor Pressure1.3 mbar @ 20°CVapor DensityNo information available

Specific Gravity 1.028

SolubilitySoluble in waterPartition coefficient; n-octanol/waterNo data availableAutoignition Temperature535 °C / 995 °FDecomposition TemperatureNo information available

Viscosity1.8 mPa.s at 20 °CMolecular FormulaC8 H8 OMolecular Weight120.15

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products. Excess heat. Keep away from open flames, hot surfaces and

sources of ignition.

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO₂)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Acetophenone

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Acetophenone	900 mg/kg (Rat)	3300 mg/kg (Rat)	LC50 > 2.130 mg/L (Rat) 8 h
	815 mg/kg (Rat)		

Toxicologically Synergistic

No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Irritating to eyes

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Acetophenone	98-86-2	Not listed				

Mutagenic Effects Not mutagenic in AMES Test

Reproductive Effects No information available.

Developmental EffectsNo information available.

Teratogenicity No information available.

STOT - single exposure None known STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects,both acute and Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

delayed

uelayeu

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Acetophenone	Not listed	Brachydanio rerio: LC50 =	EC50 = 15.5 mg/L 15 min	EC50 = 162 mg/L 48h
1		155 mg/L 96h	_	_

Persistence and Degradability Persistence is unlikely

Bioaccumulation/ Accumulation No information available.

Mobility . Will likely be mobile in the environment due to its water solubility.

Component	log Pow
Acetophenone	1.7

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes		
Acetophenone - 98-86-2	U004	-		

Acetophenone

14. Transport information

DOTNot regulatedTDGNot regulatedIATANot regulatedIMDG/IMONot regulated

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Acetophenone	98-86-2	Χ	ACTIVE	TP

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TP - Indicates a substance that is the subject of a proposed TSCA Section 4 test rule

TSCA 12(b) - Notices of Export Not applicable

International Inventories

China, X = listed, Australia, U.S.A. (TSCA), Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Australia (AICS), Korea (ECL), China (IECSC), Japan (ENCS), Philippines (PICCS).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Acetophenone	98-86-2	Х	-	202-708-7	Χ	X	X	Х	KE-28355

U.S. Federal Regulations

SARA 313

O/MINI O TO					
Component	CAS-No	Weight %	SARA 313 - Threshold Values %		
Acetophenone	98-86-2	>95	1.0		

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Acetophenone	X		-

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

ComponentHazardous Substances RQsCERCLA EHS RQsAcetophenone5000 lb-

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

· · · · · · · · · · · · · · · · · · ·					
Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Acetophenone	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade Moderate risk, Grade 2

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 19-May-2010

 Revision Date
 07-Apr-2020

 Print Date
 07-Apr-2020

Revision Summary SDS sections updated. 16.

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



Revision Nr: 3

Issue date: 15/12/2014 Supersedes: 12/08/2011

SECTION 1: Identification of the substance/mixture and of the company/undertaking

<u>1.1.</u> **Product identifier**

Chemical name benzene **EC Index** 601-020-00-8 EC No 200-753-7 CAS No. 71-43-2

01-2119447106-44 REACH registration No.

C6H6 Formula

Relevant identified uses of the substance or mixture and uses advised against

Specific use(s) Use as an intermediate

> The substance/product is registered with strictly controlled conditions as defined in Article 18(4) of Regulation (EC) No. 1907/2006 (REACH Regulation) and must therefore be

handled as such.

Details of the supplier of the safety data sheet

Transcor Energy Company

Parc de L'Alliance, Boulevard de France 7

1420 Braine-L'Alleud, Belgium Telephone +32 2 663 19 00 Telefax: +32 2 675 49 99 E-mail: reach@transcor.be

Emergency telephone number

+32 3 575 03 30 (This telephone number is available 24 hours per day, Emergency telephone

7 days per week.)

IRELAND (REPUBLIC OF)

National Poisons Information Centre

Beaumont Hospital +353 18 37 99 64/+353 1 809 21 66

UNITED KINGDOM

National Poisons Information Service

(Newcastle Centre) 0844 892 0111 (UK only, Monday to Friday, 08.00 to 18.00 hours)

Regional Drugs and Therapeutics Centre,

Wolfson Unit

SECTION 2: Hazards identification

Classification of the substance or mixture 2.1.

2.1.1. Classification according to Regulation (EU) 1272/2008

CLP-Classification The product is classified as hazardous in accordance with Regulation

(EC) No. 1272/2008.

Flam. Liq. 2 H225 Skin Irrit. 2 H315 Eye Irrit. 2 H319 Muta. 1B H340 Carc. 1A H350 STOT RE 1 H372 Asp. Tox. 1 H304



Revision Nr: 3

Issue date: 15/12/2014 **Supersedes**: 12/08/2011

Full text of H-phrases: see section 16

2.1.2. Classification according to EU Directives 67/548/EEC or 1999/45/EC

Classification : This substance is classified as hazardous according to 67/548/EEC.

F; R11 Xn; R65

T; R48/23/24/25 Xi; R36/38 Carc.Cat.1; R45 Muta.Cat.2; R46

Full text of R-phrases: see section 16

2.2. Label elements

2.2.1. Labelling according to Regulation (EU) 1272/2008

Hazard pictograms :







GHS02

GHS08

Signal word : Danger

Hazard statements : H225 - Highly flammable liquid and vapour.

H304 - May be fatal if swallowed and enters airways.

H315 - Causes skin irritation. H319 - Causes serious eye irritation. H340 - May cause genetic defects.

H350 - May cause cancer.

H372 - Causes damage to organs through prolonged or repeated exposure.

P202 - Do not handle until all safety precautions have been read and understood.

Precautionary statements : P202 - Do not handle until all safety precautions have been read and understo

P210 - Keep away from heat, hot surfaces, sparks, open flames and other

ignition sources. No smoking.

P243 - Take precautionary measures against static discharge.

P280 - Wear protective gloves/protective clothing/eye protection/face protection. P301+P310 - IF SWALLOWED: Immediately call a POISON CENTER/doctor/. P303+P361+P353 - IF ON SKIN (or hair): Take off immediately all contaminated

clothing. Rinse skin with water/shower.

P331 - Do NOT induce vomiting.

2.2.2. Labelling according to Directives (67/548 - 1999/45)

Not relevant

2.3. Other hazards

Other hazards : Vapours can form explosive mixtures with air.

Results of PBT and vPvB assessment :

Not applicable

SECTION 3: Composition/information on ingredients

3.1. Substances



Revision Nr: 3

Issue date: 15/12/2014 **Supersedes**: 12/08/2011

Substance name	Product identifier	%	Classification according to Directive 67/548/EEC
Benzene	(CAS No.) 71-43-2 (EC No) 200-753-7 (EC Index) 601-020-00-8 (REACH-no) 01-2119447106- 44-0099	100	F; R11 Xn; R65 T; R48/23/24/25 Xi; R36/38 Carc.Cat.1; R45 Muta.Cat.2; R46

Substance name	Product identifier	%	Classification according to Regulation (EC) No. 1272/2008 [CLP]
Benzene	(CAS No.) 71-43-2 (EC No) 200-753-7 (EC Index) 601-020-00-8 (REACH-no) 01-2119447106- 44-0099	100	Flam. Liq. 2, H225 Skin Irrit. 2, H315 Eye Irrit. 2, H319 Muta. 1B, H340 Carc. 1A, H350 STOT RE 1, H372 Asp. Tox. 1, H304

Full text of R- and H-phrases: see section 16

3.2. Mixtures

Not applicable

SECTION 4: First aid measures

4.1. Description of first aid measures

Inhalation : Remove person to fresh air and keep comfortable for breathing.

When in doubt or if symptoms are observed, get medical advice. If breathing is irregular or stopped, administer artificial respiration.

Get medical advice/attention.

Skin contact : Take off contaminated clothing.

Gently wash with plenty of soap and water.

Get medical advice/attention.

Eye contact : Rinse immediately carefully and thoroughly with eye-bath or water.

Remove contact lenses, if present and easy to do. Continue rinsing.

Get immediate medical advice/attention.

In case of ingestion : Rinse mouth thoroughly with water.

Do NOT induce vomiting.

Get immediate medical advice/attention.

Additional advice : First aider: Pay attention to self-protection!

Personal protection equipment: see section 8 Never give anything by mouth to an unconscious person or a person with

cramps.

When in doubt or if symptoms are observed, get medical advice.

Show this safety data sheet to the doctor in attendance.

Treat symptomatically.

4.2. Most important symptoms and effects, both acute and delayed

Inhalation : Causes damage to organs through prolonged or repeated exposure. The

following symptoms may occur: Dizziness Drowsiness Unconsciousness

Headache Nausea Convulsions Shortness of breath.



Revision Nr:

Issue date: 15/12/2014 Supersedes: 12/08/2011

Skin contact : Causes skin irritation. Causes damage to organs through prolonged or

repeated exposure. The following symptoms may occur: Dry skin Pain

erythema (redness).

: Causes serious eye irritation. The following symptoms may occur: Eye contact

Redness, pain.

Ingestion May be fatal if swallowed and enters airways. Causes damage to organs

> through prolonged or repeated exposure. The following symptoms may occur: Abdominal pain Ingestion may cause gastrointestinal irritation,

nausea, vomiting and diarrhoea. Sore throat.

: Causes damage to organs through prolonged or repeated exposure. May Other adverse effects

cause cancer. May cause genetic defects.

4.3. Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures

Extinguishing media <u>5.1.</u>

Suitable extinguishing media : Water spray, alcohol resistant foam, Dry extinguishing powder, Carbon

dioxide

Extinguishing media which must not be used : Strong water jet

for safety reasons

<u>5</u>.2. Special hazards arising from the substance or mixture

Fire hazard : Highly flammable liquid and vapour.

: Heating causes rise in pressure with risk of bursting. Specific hazards

Vapours can form explosive mixtures with air.

Vapours are heavier than air, spread along floors and form explosive mixtures

with air.

Vapours can travel considerable distances to a source of ignition where they

can ignite, flash back, or explode. Hazardous combustion products:

Carbon oxides

Nitrogen oxides (NOx) Volatile organic compounds

Advice for firefighters

Advice for firefighters : Special protective equipment for firefighters.

In case of fire: Wear self-contained breathing apparatus.

Use water spray jet to protect personnel and to cool endangered containers. Do not allow run-off from fire-fighting to enter drains or water courses.

Dispose according to legislation.

Evacuate area.

SECTION 6: Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : Evacuate area.

Stay upwind/keep distance from source.

Provide adequate ventilation.

Use personal protective equipment as required. Personal protection equipment: see section 8

Do not breathe vapour/spray.

Avoid contact with skin, eyes and clothes.

Keep away from heat, hot surfaces, sparks, open flames and other ignition



Revision Nr: 3

Issue date: 15/12/2014 **Supersedes**: 12/08/2011

sources. No smoking.

Ensure that the equipment is adequately grounded.

Use explosion-proof machinery, apparatus, ventilation facilities, tools etc.

Use only non-sparking tools.

For emergency responders : Ensure procedures and training for emergency decontamination and

disposal are in place.

Personal protection equipment: see section 8.

6.2. Environmental precautions

Environmental precautions

: Do not allow to enter into ground-water, surface water or drains.

If the product contaminates rivers and lakes or drains inform respective

authorities.

6.3. Methods and material for containment and cleaning up

Methods for cleaning up

: Use foam on spills to minimise vapours.

Stop leak if safe to do so.

Dam up.

Clean-up methods - small spillage: Absorb with liquid-binding material (e.g. sand, diatomaceous earth, acid- or universal binding agents)., Collect in closed and suitable containers for disposal.

ciosed and sultable containers for disposal.

Absorb with liquid-binding material (e.g. sand, diatomaceous earth, acid- or

universal binding agents).

Sweep or shovel spills into appropriate container for disposal Clean-up methods - large spillage: Large spills should be collected mechanically (remove by pumping) for disposal., Collect in closed and

suitable containers for disposal.

Large spills should be collected mechanically (remove by pumping) for

disposal.

Use only explosion-proof equipment.

Dispose of waste product or used containers according to local regulations.

6.4. Reference to other sections

Personal protection equipment: see section 8

Disposal: see section 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Handling

: Provide adequate ventilation.

Use personal protective equipment as required. Personal protection equipment: see section 8

Do not breathe vapour/spray.

Avoid contact with skin, eyes and clothes.

Take any precaution to avoid mixing with incompatible materials.

See also section 10

Ensure proper process control to avoid excess waste discharge

(temperature, concentration, pH value, time).

Do not allow contact with soil, surface or ground water.

Obtain special instructions before use.

(Do not handle until all safety precautions have been read and

understood.)

Keep away from heat, hot surfaces, sparks, open flames and other

ignition sources. No smoking.

Ensure that the equipment is adequately grounded.

Use explosion-proof machinery, apparatus, ventilation facilities, tools

etc.

Use only non-sparking tools.



Revision Nr: 3

Issue date: 15/12/2014 **Supersedes:** 12/08/2011

The substance/product is registered with strictly controlled conditions as defined in Article 18(4) of Regulation (EC) No. 1907/2006 (REACH

Regulation) and must therefore be handled as such.

Advices on general occupational hygiene : Keep good industrial hygiene.

Wash hands before breaks and immediately after using the product.

When using do not eat, drink or smoke.

Keep away from food, drink and animal feedingstuffs.

Keep work clothes separately. Take off contaminated clothing.

Wash contaminated clothing before reuse.

7.2. Conditions for safe storage, including any incompatibilities

Storage : Keep in a dry, cool and well-ventilated place.

Do not store near or with any of the incompatible materials listed in

section 10.

Bund storage facilities to prevent soil and water pollution in the event of

spillage.

Keep away from heat, hot surfaces, sparks, open flames and other

ignition sources. No smoking.

Packaging materials : Keep/Store only in original container.

7.3 Specific end use(s)

Intermediate.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Exposure limit values

Benzene (71-43-2)			
Belgium	Limit value (mg/m³)	3,25 mg/m³	
Belgium	Limit value (ppm)	1 ppm	
Bulgaria	OEL TWA (mg/m³)	3,25 mg/m³	
Croatia	GVI (granična vrijednost izloženosti) (mg/m³)	3,25 mg/m³	
Croatia	GVI (granična vrijednost izloženosti) (ppm)	1 ppm	
Cyprus	OEL TWA (mg/m³)	3,25 mg/m³	
Cyprus	OEL TWA (ppm)	1 ppm	
France	VME (mg/m³)	3,25 mg/m³ (restrictive limit)	
France	VME (ppm)	1 ppm (restrictive limit)	
Greece	OEL TWA (mg/m³)	3,19 mg/m³	
Greece	OEL TWA (ppm)	1,0 ppm	
Italy - Portugal - USA ACGIH	ACGIH TWA (ppm)	0,5 ppm	
Italy - Portugal - USA ACGIH	ACGIH STEL (ppm)	2,5 ppm	
Italy	OEL TWA (mg/m³)	3,25 mg/m³	
Italy	OEL TWA (ppm)	1 ppm	
Latvia	OEL TWA (mg/m³)	3,25 mg/m³	
Latvia	OEL TWA (ppm)	1 ppm	
Spain	VLA-ED (mg/m³)	3,25 mg/m³ (manufacturing, commercialization, and use restrictions under REACH; worker protection to carcinogens in the workplace)	



Revision Nr: 3

Issue date: 15/12/2014 **Supersedes:** 12/08/2011

Spain	VLA-ED (ppm)	1 ppm (manufacturing, commercialization, and use restrictions under REACH; worker protection to exposure to carcinogens and mutagens in the workplace)	
Switzerland	VME (mg/m³)	1,6 mg/m³	
Switzerland	VME (ppm)	0,5 ppm	
Netherlands	Grenswaarde TGG 8H (mg/m³)	3,25 mg/m³	
United Kingdom	WEL TWA (mg/m³)	3,25 mg/m³	
United Kingdom	WEL TWA (ppm)	1 ppm	
United Kingdom	WEL STEL (mg/m³)	9,75 mg/m³ (calculated)	
United Kingdom	WEL STEL (ppm)	3 ppm (calculated)	
Czech Republic	Expoziční limity (PEL) (mg/m³)	3 mg/m³	
Denmark	Grænseværdie (langvarig) (mg/m³)	1,6 mg/m³	
Denmark	Grænseværdie (langvarig) (ppm)	0,5 ppm	
Finland	HTP-arvo (8h) (mg/m³)	3,25 mg/m³	
Finland	HTP-arvo (8h) (ppm)	1 ppm	
Hungary	MK-érték	3 mg/m³	
Ireland	OEL (8 hours ref) (mg/m³)	3 mg/m³	
Ireland	OEL (8 hours ref) (ppm)	1 ppm	
Ireland	OEL (15 min ref) (mg/m3)	9 mg/m³ (calculated)	
Ireland	OEL (15 min ref) (ppm)	3 ppm (calculated)	
Lithuania	IPRV (mg/m³)	3,25 mg/m³	
Lithuania	IPRV (ppm)	1 ppm	
Lithuania	TPRV (mg/m³)	19 mg/m³	
Lithuania	TPRV (ppm)	6 ppm	
Norway	Gjennomsnittsverdier (AN) (mg/m³)	3 mg/m³	
Norway	Gjennomsnittsverdier (AN) (ppm)	1 ppm	
Norway	Gjennomsnittsverdier (Korttidsverdi) (mg/m3)	6 mg/m³	
Norway	Gjennomsnittsverdier (Korttidsverdi) (ppm)	3 ppm	
Poland	NDS (mg/m³)	1,6 mg/m³	
Romania	OEL TWA (mg/m³)	3,25 mg/m³	
Romania	OEL TWA (ppm)	1 ppm	
Sweden	nivågränsvärde (NVG) (mg/m³)	1,5 mg/m³	
Sweden	nivågränsvärde (NVG) (ppm)	0,5 ppm	
Sweden	kortidsvärde (KTV) (mg/m³)	9 mg/m³	
Sweden	kortidsvärde (KTV) (ppm)	3 ppm	

Recommended monitoring procedures : Personal air monitoring Room air monitoring

8.2. Exposure controls

Personal protection equipment : The type of protective equipment must be selected according to the

concentration and amount of the dangerous substance at the specific

workplace.

Respiratory protection : In case of insufficient ventilation, wear suitable respiratory equipment.

Half-face mask (EN 140) Full face mask (EN 136) Filter type: AP (EN 141)

The filter class must be suitable for the maximum contaminant



Revision Nr:

Issue date: 15/12/2014 Supersedes: 12/08/2011

concentration (gas/vapour/aerosol/particulates) that may arise when

handling the product. If the concentration is exceeded, self-contained

breathing apparatus must be used. (EN 137)

Wear chemically resistant gloves (tested to EN374), Suitable Hand protection

material:,NBR (Nitrile rubber) (> 0.45 mm, BTT > 30 min.),PVA (Polyvinyl alcohol) (BTT > 480 min.), Fluoropolymers (BTT > 480 min.),The quality of the protective gloves resistant to chemicals must be chosen as a function of the specific working place concentration and

quantity of hazardous substances.

Eye protection Use suitable eye protection. (EN166): Goggles

Wear suitable protective clothing. Body protection

Wear suitable coveralls to prevent exposure to the skin.

Chemical resistant safety shoes

Thermal hazard protection Not required under normal use.

Use dedicated equipment.

The substance/product is registered with strictly controlled conditions Engineering control measures

as defined in Article 18(4) of Regulation (EC) No. 1907/2006 (REACH

Regulation) and must therefore be handled as such.

Provide adequate ventilation.

Organisational measures to prevent /limit releases, dispersion and

exposure

Safe handling: see section 7.

Transfer and handle product only in closed systems.

Guarantee that the eye flushing systems and safety showers are

closely located to the working place.

Store locked up.

Take precautionary measures against static discharges. Ensure that the equipment is adequately grounded.

Use explosion-proof machinery, apparatus, ventilation facilities, tools

Environmental exposure controls Do not allow contact with soil, surface or ground water.

Comply with applicable Community environmental protection

legislation.

SECTION 9: Physical and chemical properties

Information on basic physical and chemical properties 9.1.

Appearance liquid Colour clear

Odour characteristic Odour threshold No data available No data available

Melting point/freezing point 5,49 °C Initial boiling point and boiling range 80,09 °C 11 °C Flash point

Evaporation rate No data available Flammability (solid, gas) Not applicable, liquid Upper/lower flammability or explosive limits < No data available Vapour pressure 10 kPa (20 °C) 100 kPa (79.9 °C)

Vapour density No data available



Revision Nr:

Issue date: 15/12/2014 **Supersedes**: 12/08/2011

Density : $0.8765 \text{ g/cm}^3 (20 ^{\circ}\text{C})$ Relative density : No data available Water solubility : $\approx 1.88 \text{ g/l} (23.5 ^{\circ}\text{C})$

Solubility in different media : Justification for data waiving

not relevant

Partition coefficient n-octanol/water : 2,13 Auto-ignition temperature : 498 °C

Decomposition temperature : No data available Viscosity : 0,604 mPa.s (25 °C)

Explosive properties : Not applicable

The study does not need to be conducted because there are no chemical groups associated with explosive properties present in the

molecule.

Oxidising properties : Not applicable

The classification procedure needs not to be applied because there are no chemical groups present in the molecule which are associated with

oxidising properties.

9.2. Other information

Surface tension : Justification for data waiving

not relevant

SECTION 10: Stability and reactivity

10.1. Reactivity

Reactivity : Highly flammable liquid and vapour.

Reference to other sections: 10.4 & 10.5

10.2. Chemical stability

Stability : The product is stable under storage at normal ambient temperatures.

10.3. Possibility of hazardous reactions

Possibility of hazardous reactions : Vapours can form explosive mixtures with air.

10.4. Conditions to avoid

Conditions to avoid : Keep away from heat, hot surfaces, sparks, open flames and other ignition

sources. No smoking.
Safe handling: see section 7

10.5. Incompatible materials

Incompatible materials : Oxidising substances, Strong acids, Halogens, Safe handling: see section

1

10.6. Hazardous decomposition products

Hazardous decomposition products : Reference to other sections: 5.2

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Not classified (Based on available data, the classification criteria are not met.)



Revision Nr: 3

Issue date: 15/12/2014 **Supersedes**: 12/08/2011

 Benzene (71-43-2)

 LD50/oral/rat
 > 2000 mg/kg

 LD50/dermal/rabbit
 > 5000 mg/kg

 ATE CLP (vapours)
 44,5 mg/l/4h

Skin corrosion/irritation : Causes skin irritation.

pH: No data available

Serious eye damage/eye irritation : Causes serious eye irritation.

pH: No data available

Respiratory or skin sensitisation : Not classified (Based on available data, the classification criteria are not

met.)

Germ cell mutagenicity : May cause genetic defects.

Carcinogenicity : May cause cancer.

LOAEL, Oral, Rat: 25 mg/kg bw/day

Reproductive toxicity : Not classified (Based on available data, the classification criteria are not met.)

NOAEC, Inhalation: 960 mg/m³

NOAEC, Developmental toxicity, Inhalation, Rat: 32 mg/m³

STOT-single exposure : Not classified (Based on available data, the classification criteria are not met.)

STOT-repeated exposure : Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard : May be fatal if swallowed and enters airways.

Other information

Reference to other sections: 4.2, Symptoms related to the physical, chemical and toxicological characteristics, For further information see section 4

SECTION 12: Ecological information

12.1. Toxicity

Benzene (71-43-2)		
LC50 fish 1	eco mg/l (96 h)	
EC50 Daphnia 1	Daphnia 1 10 mg/l (48h)	
ErC50 (algae) 100 mg/l (72 h)		
LOEC (chronic) 1,6 mg/l		
NOEC (chronic)	3 mg/l Invertebrates.	
NOEC chronic fish	0,8 mg/l	
NOEC chronic crustacea	3 mg/l	
NOEC chronic algae	*	
Additional information	ErC10, Biomass, 72h, algae: 10 mg/l ErC10, Growth rate, 72h, algae: 34 mg/l IC50, 24h, micro-organisms: 13 mg/l	



Revision Nr:

Issue date: 15/12/2014 **Supersedes:** 12/08/2011

12.2. Persistence and degradability

Persistence and degradability : Readily biodegradable.

12.3. Bioaccumulative potential

3

Bioaccumulation : Low potential

Partition coefficient n-octanol/water : 2,13 Bioconcentration factor (BCF) : < 10

12.4. Mobility in soil

Mobility

Surface tension : Justification for data waiving

12.5. Results of PBT and vPvB assessment

PBT/vPvB data :

12.6. Other adverse effects

Other information :

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Product waste: : Do not allow contact with soil, surface or ground water.

Dispose of empty containers and wastes safely.

Safe handling: see section 7

Refer to manufacturer/supplier for information on recovery/recycling

Recycling is preferred to disposal or incineration

If recycling is not possible, eliminate in accordance with local valid waste

disposal regulations

Contaminated packaging : Never use pressure to empty container.

Do not pierce or burn, even after use.

Handle contaminated packages in the same way as the substance itself.

Dispose according to legislation.

List of proposed waste codes/waste

designations in accordance with EWC

: This material and its container must be disposed of as hazardous waste. Waste codes should be assigned by the user based on the application for

which the product was used.

SECTION 14: Transport information

14.1. UN number

UN number : 1114

14.2. UN proper shipping name

Proper Shipping Name : BENZENE
Proper Shipping Name (IATA) : BENZENE
Proper Shipping Name (IMDG) : BENZENE
Proper Shipping Name (ADN) : BENZENE

14.3. Transport hazard class(es)

14.3.1. Overland transport

Class(es) : 3 - Flammable liquid

Hazard identification number (Kemler No.) : 33 Classification code : F1



Revision Nr: 3

Issue date: 15/12/2014 **Supersedes**: 12/08/2011

ADR/RID-Labels : 3 - Flammable liquid



14.3.2. Inland waterway transport (ADN)

Class (UN) : 3

14.3.3. Transport by sea

Class or Division : 3 - flammable liquids

14.3.4. Air transport

Class or Division : 3 - flammable liquids

14.4. Packing group

Packing group : II

14.5. Environmental hazards

Other information : No supplementary information available.

14.6 Special precautions for user

Special precautions for user : No data available.

14.7 Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

No data available

SECTION 15: Regulatory information

15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture

15.1.1. EU-Regulations

The following restrictions are applicable according to Annex XVII of the REACH Regulation (EC) No 1907/2006

3. Liquid substances or mixtures which are regarded as dangerous in accordance with Directive 1999/45/EC or are fulfilling the criteria for any of the following hazard classes or categories set out in

Annex I to Regulation (EC) No 1272/2008 : Benzene 5. Benzene : Benzene

28. Substances which appear in Part 3 of Annex VI to Regulation (EC) No 1272/2008 classified as Carcinogen category 1A or 1B (Table 3.1) or Carcinogen category 1 or 2 (Table 3.2) and listed as follows: Carcinogen category 1A (Table 3.1)/Carcinogen category 1 (Table 3.2) listed in Appendix 1 Carcinogen category 1B (Table 3.1)/Carcinogen category 2 (Table 3.2) listed in

Appendix 2 : Benzene



Revision Nr: 3

Issue date: 15/12/2014 **Supersedes**: 12/08/2011

29. Substances which appear in Part 3 of Annex VI to Regulation (EC) No 1272/2008 classified as Germ cell Mutagen category 1A or 1B (Table 3.1) or Mutagen category 1 or 2 (Table 3.2) and listed as follows: Mutagen category 1A (Table 3.1)/Mutagen category 1 (Table 3.2) listed in Appendix 3 Mutagen category 1B (Table 3.1)/Mutagen category 2 (Table

3.2) listed in Appendix 4 : Benzene

40. Substances classified as flammable gases category 1 or 2, flammable liquids categories 1, 2 or 3, flammable solids category 1 or 2, substances and mixtures which, in contact with water, emit flammable gases, category 1, 2 or 3, pyrophoric liquids category 1 or pyrophoric solids category 1, regardless of whether they appear in Part 3 of

Annex VI to Regulation (EC) No 1272/2008 or not. : Benzene

This product contains an ingredient according to the candidate list of Annex XIV of the REACH

Regulation 1907/2006/EC. : none

Authorisations : Not applicable

15.1.2. National regulations

DE: WGK : 3

NL: ABM : 2 - May cause heritable genetic damage...3 - May cause cancer.

NL: NeR (Nederlandse emissie Richtlijn) : Organic substances in vapour or gaseous form

15.2. Chemical safety assessment

Chemical Safety Assessment : For this substance a chemical safety assessment has been carried out.

SECTION 16: Other information

Full text of R-, H- and EUH-phrases:

Asp. Tox. 1 : Aspiration hazard, Category 1
Carc. 1A : Carcinogenicity, Category 1A

Eye Irrit. 2 : Serious eye damage/eye irritation Category 2

Flam. Liq. 2 : Flammable liquids, Category 2

Muta. 1B : Germ cell mutagenicity, hazard categories 1B

Skin Irrit. 2 : Skin corrosion/irritation, Category 2

STOT RE 1 : Specific target organ toxicity — Repeated exposure, Category 1

H225 : Highly flammable liquid and vapour.

H304 : May be fatal if swallowed and enters airways.

H315 : Causes skin irritation.
H319 : Causes serious eye irritation.
H340 : May cause genetic defects.
H350 : May cause cancer.

H372 : Causes damage to organs through prolonged or repeated exposure.

R11 : Highly flammable.

R36/38 : Irritating to eyes and skin. R45 : May cause cancer.

R46 : May cause heritable genetic damage.

R48/23/24/25 : Toxic: danger of serious damage to health by prolonged exposure through inhalation,



Revision Nr: 3

Issue date: 15/12/2014 **Supersedes**: 12/08/2011

in contact with skin and if swallowed.

R65 : Harmful: may cause lung damage if swallowed.

F : Highly flammable

T : Toxic Xi : Irritant Xn : Harmful

Key literature references and sources : CSR

for data

Safety datasheet sections which have : 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16

been updated

Abbreviations and acronyms : ABM = Algemene beoordelingsmethodiek

ADN = Accord Européen relatif au Transport International des Marchandises

Dangereuses par voie de Navigation du Rhin

ADR = Accord européen relatif au transport international des marchandises

Dangereuses par Route

CLP = Classification, Labelling and Packaging Regulation according to 1272/2008/EC

IATA = International Air Transport Association

IMDG = International Maritime Dangerous Goods Code LEL = Lower Explosive Limit/Lower Explosion Limit UEL = Upper Explosion Limit/Upper Explosive Limit

REACH = Registration, Evaluation, Authorisation and Restriction of Chemicals

BTT = Breakthrough time (maximum wearing time)

DMEL = Derived minimal effect level
DNEL = Derived No Effect Level
EC50 = Median Effective Concentration

EL50 = Median effective level

ErC50 = EC50 in terms of reduction of growth rate ErL50 = EL50 in terms of reduction of growth rate

EWC = European Waste Catalogue LC50 = Median lethal concentration

LD50 = Median lethal dose LL50 = Median lethal level NA = Not applicable

NOEC = No observed effect concentration

NOEL: no-observed-effect level

NOELR = No observed effect loading rate

NOAEC = No observed adverse effect concentration

NOAEL = No observed adverse effect level

N.O.S. = Not Otherwise Specified

OEL = Occupational Exposure Limits - Short Term Exposure Limits (STELs)

PNEC = Predicted No Effect Concentration
Quantitative structure-acivity relationship (QSAR)

STOT = Specific Target Organ Toxicity TWA = time weighted average VOC = Volatile organic compounds

WGK = Wassergefährdungsklasse (Water Hazard Class under German Federal Water

Management Act)

The contents and format of this SDS are in accordance with EEC Commission Directive 1999/45/EC, 67/548/EC, 1272/2008/EC and EEC Commission Regulation 1907/2006/EC (REACH) Annex II.

DISCLAIMER OF LIABILITY The information in this SDS was obtained from sources which we believe are reliable. However, the information is provided without any warranty, express or implied, regarding its correctness. The conditions or methods of



Revision Nr: 3

Issue date: 15/12/2014 **Supersedes:** 12/08/2011

handling, storage, use or disposal of the product are beyond our control and may be beyond our knowledge. For this and other reasons, we do not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of or in any way connected with the handling, storage, use or disposal of the product. This SDS was prepared and is to be used only for this product. If the product is used as a component in another product, this SDS information may not be applicable.



Safety Data Sheet - Version 5.0

Preparation Date 7/15/2014

Latest Revision Date (If Revised) 12/7/2017

SDS Expiry Date 12/5/2020

1. IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

1.1 Product Identifier

Chemical Name Benzo[k]fluoranthene

Catalogue # B203560

1.2 Relevant Identified Uses of the Substance or Mixture and Uses Advised Against

Product UsesTo be used only for scientific research and development. Not for use in humans or animals.

1.3 Details of the Supplier of the Safety Data Sheet

Company Toronto Research Chemicals

2 Brisbane Road Toronto, ON M3J 2J8


CANADA

Telephone +14166659696 **FAX** +14166654439

Email orders@trc-canada.com

1.4 Emergency Telephone Number

Emergency# +1(416) 665-9696 between 0800-1700 (GMT-5)



2. HAZARDS IDENTIFICATION

WHMIS Classification (Canada)

D2A Very Toxic Material Causing Other Toxic Effects

Carcinogen

WHMIS Symbols (Canada)



2.1/2.2 Classification of the Substance or Mixture and Label Elements

GHS Hazards Classification (According to EU Regulation 1272/2008 and US OSHA 1910.1200)

Carcinogenicity (Category 1B)

Hazardous to the Aquatic Environment, Acute Hazard (Category 1)

Hazardous to the Aquatic Environment, Long-Term Hazard (Category 1)

GHS Hazards Identification (According to EU Regulation 1272/2008 and US OSHA 1910.1200)

Signal Word Danger

GHS Hazard Statements

H350 May cause cancer. H400 Very toxic to aquatic life.

H410 Very toxic to aquatic life with long lasting effects.

GHS Precautionary Statements

P201 Obtain special instructions before use.
P273 Avoid release to the environment.

Toronto Research Chemicals - B203560 Page 1

2.3 Unclassified Hazards/Hazards Not Otherwise Classified

No data available.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Molecular Formula: C₂₀H₁₂ Molecular Weight: 252.31

CAS Registry #: 207-08-9 **EC**#: 205-916-6

Synonyms

11,12-Benzofluoranthene; 2,3,1',8'-Binaphthylene; 8,9-Benzfluoranthene; 8,9-Benzofluoranthene; Dibenzo[b,jk]

fluorene

3.2 Mixtures

Not a mixture.

4. FIRST AID MEASURES

4.1 Description of First Aid Measures

General Advice

If medical attention is required, show this safety data sheet to the doctor.

If Inhaled

If inhaled, move person to fresh air. If not breathing, give artificial respiration and consult a physician.

In Case of Skin Contact

Wash affected area with soap and water. Consult a physician if any exposure symptoms are observed.

In Case of Eye Contact

Immediately rinse eyes with plenty of water for at least 15 minutes. Consult a physician.

If Swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Do NOT induce vomiting unless advised to do so by a physician or Poison Control Center. Seek medical attention.

4.2 Most Important Symptoms and Effects, Both Acute and Delayed

The most important known symptoms and effects are described in the labeling (see section 2.2) and/or section 11.

4.3 Indication of any Immediate Medical Attention and Special Treatment Needed

No data available.

5. FIREFIGHTING MEASURES

5.1 Extinguishing Media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special Hazards Arising from the Substance or Mixture

Carbon oxides

5.3 Advice for Firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

5.4 Further Information

No data available.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

Toronto Research Chemicals - B203560

Page 2

Method and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

Storage conditions: Refrigerator

7.3 Specific End Uses

For scientific research and development only. Not for use in humans or animals.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control Parameters

Contains no components with established occupational exposure limits.

8.2 Exposure Controls

Appropriate Engineering Controls

A laboratory fumehood or other appropriate form of local exhaust ventilation should be used to avoid exposure.

Personal Protective Equipment

All recommendations below are advisory in nature and a risk assessment should be performed by the employer/end user prior to use of this product. The type of protective equipment must be selected based on the amount and concentration of the dangerous material being used in the workplace.

Eye/Face Protection

Safety goggles or face shield. All equipment should have been tested and approved under appropriate standards, such as NIOSH (US), CSA (Canada), or EN 166 (EU).

Skin Protection

Gloves should be used when handling this material. Gloves are to be inspected prior to use. Contaminated gloves are to be removed using proper glove removal technique so that the outer surface of the glove does not contact bare skin. Dispose of contaminated gloves after use in compliance with good laboratory practices and local requirements.

Gloves used for incidental exposures (splash protection) should be designated as "chemical resistant" by EU standard EN 374 with the resistance codes corresponding to the anticipated use of the material. Unrated gloves are not recommended.

Suggested gloves: AnsellPro Sol-Vex nitrile gloves style 37-175, 15 mil thickness.

Penetration time has not been determined.

Gloves used for prolonged direct exposure (immersion) should be designated "chemical resistant" as per EN 734 with the resistance codes corresponding to the anticipated use of the material.

Suggested gloves: AnsellPro Viton/Butyl gloves style 38-612, 4/8 mil thickness.

Penetration time has not been determined.

These recommendations may not apply if the material is mixed with any other chemical, or dissolved into a solution. A risk assessment must be performed to ensure the gloves will still offer acceptable protection.

Body Protection

Fire resistant (Nomex) coveralls or chemical-resistant bodysuit (laminated Tychem SL or equivalent).

Respiratory Protection

Recommended respirators are NIOSH-approved N100 or CEN-approved FFP3 particulate respirators. These are to be only used as a backup to local exhaust ventilation or other engineering controls. If the respirator is the only means of protection, a full-face supplied air respirator must be used.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on Basic Physical and Chemical Properties

A) Appearance

B) Odour

Toronto Research Chemicals - B203560

Page 3

Light Yellow Solid

C) Odour Threshold

No data available

E) Melting Point/Freezing Point

213-215°C

G) Flash point

No data available

I) Flammability (Solid/Gas)

No data available

K) Vapour Pressure

No data available

M) Relative Density

No data available

O) Partition Coefficient: n-octanol/water

No data available

Q) Decomposition Temperature

No data available

S) Explosive Properties

No data available

9.2 Other Information

no data available

No data available

Hq (D

No data available

F) Initial Boiling Point/Boiling Range

No data available

H) Evaporation Rate

No data available

J) Upper/Lower Flammability/Explosive Limits

No data available

L) Vapour Density

No data available

N) Solubility

Chloroform (Slightly)

P) Auto-Ignition Temperature

No data available

R) Viscosity

No data available

T) Oxidizing Properties

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available.

10.2 Chemical Stability

Stable under recommended storage conditions.

10.3 Possibility of Hazardous Reactions

No data available.

10.4 Conditions to Avoid

No data available.

10.5 Incompatible Materials

Strong oxidizing agents.

10.6 Hazardous Decomposition Products

In the event of fire: See section 5. Other decomposition products: No data available.

11. TOXICOLOGICAL INFORMATION

11.1 Information on Toxicological Effects

A) Acute Toxicity

Oral LD50: No data available.

Dermal LD50: No data available.

B) Skin Corrosion/Irritation

No data available

C) Serious Eye Damage/Irritation

No data available

D) Respiratory or Skin Sensitization

No data available

E) Germ Cell Mutagenicity

No data available

F) Carcinogenicity

Probable human carcinogen.

This compound has been designated by the IARC as Group 2A: Probably carcinogenic to humans.

G) Reproductive Toxicity/Teratogenicity

No data available

Toronto Research Chemicals - B203560

Page 4

Inhalation LC50: No data available.

H) Single Target Organ Toxicity - Single Exposure

No data available

I) Single Target Organ Toxicity - Repeated Exposure

No data available

J) Aspiration Hazard

No data available

K) Potential Health Effects and Routes of Exposure

Inhalation

May be harmful if inhaled. May cause respiratory tract irritation.

Ingestion

May be harmful if swallowed.

Skin

May be harmful if absorbed through skin. May cause skin irritation.

Eyes

May cause eye irritation.

L) Signs and Symptoms of Exposure

The most important known symptoms and effects are described in the labeling (see section 2.2) and/or section 11.

To the best of our knowledge, the chemical, physical, and toxicological properties of this material have not been thoroughly investigated.

M) Additional Information

RTECS: DF6350000

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available.

12.2 Persistance and Degradability

No data available.

12.3 Bioaccumulative Potential

No data available.

12.4 Mobility in Soil

No data available.

12.5 Results of PBT and vPvB Assessment

No data available.

12.6 Other Adverse Effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste Treatment Methods

A) Product

Product may be burned in an incinerator equipped with afterburner and scrubber. Excess and expired materials are to be offered to a licensed hazardous material disposal company. Ensure that all Federal and Local regulations regarding the disposal and destruction of this material are followed.

B) Contaminated Packaging

Dispose of as above.

C) Other Considerations

Product is not to be disposed of in sanitary sewers, storm sewers, or landfills.

14. TRANSPORT INFORMATION

14.1 UN Number

DOT (US): UN3077 IATA: UN3077 IMDG: UN3077 ADR/RID: UN3077

14.2 UN Proper Shipping Name

DOT (US)/IATA:

Environmentally hazardous substance, solid, n.o.s. (Benzo[k]fluoranthene)

IMDG/ARD/RID:

ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benzo[k]fluoranthene)

14.3 Transport Hazard Class(es)

DOT (US): 9 IATA: 9 IMDG: 9 ADR/RID: 9

Toronto Research Chemicals - B203560

Page 5

14.4 Packing Group

DOT (US): III IATA: III IMDG: III ADR/RID: III

14.5 Environmental Hazards

DOT (US): None IATA: None IMDG: None ADR/RID: None

14.6 Special Precautions for User

None

15. REGULATORY INFORMATION

This safety data sheet complies with the requirements of WHMIS (Canada), OSHA 1910.1200 (US), and EU Regulation EC No. 1907/2006 (European Union).

15.1 Safety, Health and Environmental Regulations/Legislation Specific for the Substance or Mixture

A) Canada

DSL/NDSL Status: This product is not listed on the Canadian DSL/NDSL.

B) United States

TSCA Status: This product is not listed on the US EPA TSCA.

C) European Union

ECHA Status: This product is not registered with the EU ECHA.

15.2 Chemical Safety Assessment

No data available

16. OTHER INFORMATION

16.1 Revision History

Original Publication Date: 7/15/2014

16.2 List of Abbreviations

LD50 Median lethal dose of a substance required to kill 50% of a test population.

LC50 Medial lethal concentration of a substance required to kill 50% of a test population.

LDLo Lowest known lethal dose TDLo Lowest known toxic dose

IARC International Agency for Research on Cancer

NTP National Toxicology Program

RTECS Registry of Toxic Effects of Chemical Substances

16.3 Further Information

Copyright 2015. Toronto Research Chemicals Inc. Copies may be made for internal use only. The above information is believed to be correct to the best of our knowledge, but is to be only used as a guide. To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated. Please take all due care when handling this product.



SAFETY DATA SHEET

Revision Date 19-Jan-2018 Revision Number 3

1. Identification

Product Name 1,2-Benzanthracene

Cat No.: AC105250000; AC105250010; AC105252500

Synonyms Benzóa!anthracene; Tetraphene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Carcinogenicity Category 1B

Label Elements

Signal Word

Danger

Hazard Statements

May cause cancer



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Response

IF exposed or concerned: Get medical attention/advice

Storage

Store locked up

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

WARNING. Cancer - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Benz[a]anthracene	56-55-3	99

4. First-aid measures

Eye Contact Immediate medical attention is required. Rinse immediately with plenty of water, also under

the eyelids, for at least 15 minutes.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

clothes and shoes. Immediate medical attention is required.

Inhalation Remove from exposure, lie down. Remove to fresh air. If not breathing, give artificial

respiration. Immediate medical attention is required.

Ingestion Call a physician immediately. Clean mouth with water.

Most important symptoms and

effects

No information available.

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Water spray. Carbon dioxide (CO2). Dry chemical. Chemical foam.

Unsuitable Extinguishing Media No information available

Flash Point No information available Method - No information available

Autoignition Temperature

Explosion Limits

Upper

Not applicable

No data available

Revision Date 19-Jan-2018 1,2-Benzanthracene

Lower No data available Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Do not allow run-off from fire-fighting to enter drains or water courses.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO₂).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
0	1	0	N/A

6. Accidental release measures

Personal Precautions Environmental Precautions Ensure adequate ventilation. Use personal protective equipment as required. Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained.

Methods for Containment and Clean Sweep up and shovel into suitable containers for disposal. Up

	7. Handling and storage
Handling	Do not breathe dust. Do not get in eyes, on skin, or on clothing. Handle product only in closed system or provide appropriate exhaust ventilation.
Storage	Keep in a dry, cool and well-ventilated place. Refer product specification and/or product label for specific storage temperature requirement. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines

This product does not contain any hazardous materials with occupational exposure limitsestablished by the region specific regulatory bodies.

Ensure adequate ventilation, especially in confined areas. **Engineering Measures**

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

Physical and chemical properties

Powder Solid **Physical State**

AppearanceBeigeOdorOdorless

Odor Threshold

pH

No information available

No information available

Melting Point/Range 158 - 161 °C / 316.4 - 321.8 °F

Boiling Point/Range 437.6 °C / 819.7 °F Flash Point No information available Evaporation Rate Not applicable

Flammability (solid,gas)

No information available

Flammability or explosive limits

UpperNo data availableLowerNo data availableVapor PressureNo information availableVapor DensityNot applicable

Specific Gravity
Solubility
No information available
Partition coefficient; n-octanol/water
No data available
No data available

Autoignition Temperature Not applicable

Decomposition TemperatureNo information available

ViscosityNot applicableMolecular FormulaC18 H12Molecular Weight228.29

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products.

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous PolymerizationNo information available.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product InformationNo acute toxicity information is available for this product

Component Information

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

 Irritation
 No information available

 Sensitization
 No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Benz[a]anthracene	56-55-3	Group 2B	Reasonably	A2	X	A2
			Anticipated			

Mutagenic Effects Ames test: positive.

Reproductive Effects No information available.

Developmental EffectsNo information available.

Teratogenicity No information available.

STOT - single exposureSTOT - repeated exposure
None known

Aspiration hazard No information available

Symptoms / effects,both acute and No information available

delayed

Endocrine Disruptor Information

Component	EU - Endocrine Disrupters	EU - Endocrine Disruptors -	Japan - Endocrine Disruptor
	Candidate List	Evaluated Substances	Information
Benz[a]anthracene	Group III Chemical	Not applicable	Not applicable

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

The product contains following substances which are hazardous for the environment. Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Benz[a]anthracene	Not listed	Not listed	EC50 = 0.26 mg/L 15 min	LC50: = 0.01 mg/L, 96h Static (Daphnia magna) EC50: = 0.0042 mg/L, 48h
				(Daphnia magna)

Persistence and Degradability May persist

Bioaccumulation/ Accumulation No information available.

Mobility . Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Benz[a]anthracene	5.61

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Benz[a]anthracene - 56-55-3	U018	=

14. Transport information

DOT Not regulated Not regulated

IATA

UN-No UN3077

Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.*

Hazard Class 9
Packing Group III

IMDG/IMO

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Benz[a]anthracene	56-55-3	Χ	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed '-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

	Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
ı	Benz[a]anthracene	56-55-3	-	X	200-280-6	-	-	-	Х	-

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Benz[a]anthracene	56-55-3	99	0.1

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Benz[a]anthracene	-	-	-	X

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA This material, as supplied, contains one or more substances regulated as a hazardous

substance under the Comprehensive Environmental Response Compensation and Liability

Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Benz[a]anthracene	10 lb	-

California Proposition 65 This product contains the following Proposition 65 chemicals.

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Benz[a]anthracene	56-55-3	Carcinogen	0.033 µg/day	Carcinogen

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Benz[a]anthracene	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N

DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

Revision Date 19-Jan-2018 **Print Date** 19-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

SAFETY DATA SHEET



1. Identification

Product identifier Benzo(b)fluoranthene

Other means of identification

Item N-11165

Recommended use For Laboratory Use Only

Recommended restrictions None known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name Chem Service, Inc.
Address 660 Tower Lane

West Chester, PA 19380

United States

Telephone Toll Free 800-452-9994

Direct 610-692-3026

Website www.chemservice.com
E-mail info@chemservice.com

Emergency phone number Chemtrec US 800-424-9300

Chemtrec outside US +1 703-527-3887

2. Hazard(s) identification

Physical hazards Not classified.

Health hazardsCarcinogenicityCategory 1Environmental hazardsHazardous to the aquatic environment, acuteCategory 1

hazard

Hazardous to the aquatic environment, Category 1

long-term hazard

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement May cause cancer. Very toxic to aquatic life. Very toxic to aquatic life with long lasting effects.

Precautionary statement

Prevention Obtain special instructions before use. Do not handle until all safety precautions have been read

and understood. Avoid release to the environment. Wear protective gloves/protective clothing/eye

protection/face protection.

Response If exposed or concerned: Get medical advice/attention. Collect spillage.

Storage Store locked up.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise

classified (HNOC)

None known.

Supplemental information Not applicable.

3. Composition/information on ingredients

Substances

Chemical name	Common name and synonyms	CAS number	%
Benzo(b)fluoranthene		205-99-2	100

Material name: Benzo(b)fluoranthene N-11165 Version #: 01 Issue date: 04-29-2015 *Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation Move to fresh air. Call a physician if symptoms develop or persist.

Skin contact Wash off with soap and water. Get medical attention if irritation develops and persists.

Rinse with water. Get medical attention if irritation develops and persists. Eve contact

Ingestion Rinse mouth. Get medical attention if symptoms occur. Most important Direct contact with eyes may cause temporary irritation.

symptoms/effects, acute and

delayed

Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.

medical attention and special treatment needed

Indication of immediate

General information IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

Water fog. Foam. Dry chemical powder. Carbon dioxide (CO2).

During fire, gases hazardous to health may be formed.

Do not use water jet as an extinguisher, as this will spread the fire.

5. Fire-fighting measures

Suitable extinguishing media

Unsuitable extinguishing media

Specific hazards arising from

the chemical

Special protective equipment and precautions for firefighters

Fire fighting

equipment/instructions

Specific methods

Use water spray to cool unopened containers.

Use standard firefighting procedures and consider the hazards of other involved materials.

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

General fire hazards No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions. protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate personal protective equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up This material is classified as a water pollutant under the Clean Water Act and should be prevented from contaminating soil or from entering sewage and drainage systems which lead to waterways. Stop the flow of material, if this is without risk. Collect spillage. Following product recovery, flush area with water. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid release to the environment. Contact local authorities in case of spillage to drain/aquatic environment. Prevent further leakage or spillage if safe to do so. Do not contaminate water. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices. Avoid release to the environment. Do not empty into

Conditions for safe storage, including any incompatibilities Store locked up. Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

No exposure limits noted for ingredient(s).

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eye/face protection Use personal protective equipment as required.

N-11165 Version #: 01 Issue date: 04-29-2015

Skin protection

Use personal protective equipment as required. Hand protection Other Use personal protective equipment as required. Use personal protective equipment as required. Respiratory protection

Wear appropriate thermal protective clothing, when necessary. Thermal hazards

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective

equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Solid. Physical state

Form Solid. Crystalline Solid

Color Pale yellow Odor Not available. Odor threshold Not available. Not available. pН 334.4 °F (168 °C) Melting point/freezing point

range

Not available. Flash point Not available. **Evaporation rate** Not available. Flammability (solid, gas) Upper/lower flammability or explosive limits

Flammability limit - lower

Initial boiling point and boiling

(%)

Not available.

Not available.

Not available. Flammability limit - upper

(%)

Explosive limit - lower (%) Not available. Not available. Explosive limit - upper (%)

0.0000001 kPa at 25 °C Vapor pressure

Not available. Vapor density Relative density Not available.

Solubility(ies)

Not available. Solubility (water)

Partition coefficient 6.6

(n-octanol/water)

Auto-ignition temperature Not available. Not available. **Decomposition temperature Viscosity** Not available.

Other information

C20-H12 Molecular formula Molecular weight 252.32 g/mol

10. Stability and reactivity

Reactivity The product is stable and non-reactive under normal conditions of use, storage and transport.

Chemical stability Material is stable under normal conditions. Hazardous polymerization does not occur. Possibility of hazardous

reactions

Conditions to avoid Contact with incompatible materials.

Incompatible materials Strong oxidizing agents.

Hazardous decomposition

products

No hazardous decomposition products are known.

Material name: Benzo(b)fluoranthene

11. Toxicological information

Information on likely routes of exposure

InhalationNo adverse effects due to inhalation are expected.Skin contactNo adverse effects due to skin contact are expected.Eye contactDirect contact with eyes may cause temporary irritation.

Ingestion Expected to be a low ingestion hazard.

Symptoms related to the physical, chemical and toxicological characteristics

Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity Not available.

Skin corrosion/irritation Prolonged skin contact may cause temporary irritation.

Serious eye damage/eye Direct contact with eyes may cause temporary irritation.

irritation

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity

No data available to indicate product or any components present at greater than 0.1% are

mutagenic or genotoxic.

Carcinogenicity May cause cancer.

IARC Monographs. Overall Evaluation of Carcinogenicity

Benzo(b)fluoranthene (CAS 205-99-2)

2B Possibly carcinogenic to humans.

US. National Toxicology Program (NTP) Report on Carcinogens

Benzo(b)fluoranthene (CAS 205-99-2) Reasonably Anticipated to be a Human Carcinogen.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicityThis product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity -

single exposure

Not classified.

Specific target organ toxicity -

repeated exposure

Not classified.

Aspiration hazard Not available.

Chronic effects Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Very toxic to aquatic life with long lasting effects. Accumulation in aquatic organisms is expected.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential Not available.

Partition coefficient n-octanol / water (log Kow)

6.6

Mobility in soil No data available.

potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructionsCollect and reclaim or dispose in sealed containers at licensed waste disposal site. This material

and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international

regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste

disposal company.

Material name: Benzo(b)fluoranthene

Waste from residues / unused products

Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see:

Disposal instructions).

Contaminated packaging

Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

UN number UN3077

UN proper shipping name Environmentally hazardous substances, solid, n.o.s. (Benzo(b)fluoranthene RQ = 1 LBS)

Transport hazard class(es)

Class 9 Subsidiary risk 9 Label(s) Packing group Ш

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

8, 146, 335, A112, B54, IB8, IP3, N20, T1, TP33 Special provisions

Packaging exceptions 213 Packaging non bulk 240 Packaging bulk

IATA

UN3077 **UN number**

UN proper shipping name Transport hazard class(es) Environmentally hazardous substance, solid, n.o.s. (Benzo(b)fluoranthene)

9 **Class** Subsidiary risk Ш Packing group **Environmental hazards** No. **ERG Code** 9L

Other information

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Passenger and cargo

aircraft

Allowed.

Cargo aircraft only

Allowed.

IMDG

UN3077 **UN number**

UN proper shipping name Transport hazard class(es) ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benzo(b)fluoranthene)

Class 9 Subsidiary risk Ш **Packing group Environmental hazards**


Marine pollutant No. F-A, S-F **EmS**

Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

Transport in bulk according to Annex II of MARPOL 73/78 and Not applicable.

the IBC Code

DOT: IATA: IMDG



DOT Regulated Marine Pollutant. IMDG Regulated Marine Pollutant. **General information**

N-11165 Version #: 01 Issue date: 04-29-2015

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication

Standard, 29 CFR 1910.1200.

One or more components are not listed on TSCA.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Benzo(b)fluoranthene (CAS 205-99-2) Listed.

SARA 304 Emergency release notification

Not regulated.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - No

Delayed Hazard - Yes Fire Hazard - No Pressure Hazard - No Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous Yes

chemical

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
Benzo(b)fluoranthene	205-99-2	100

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

Benzo(b)fluoranthene (CAS 205-99-2)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Clean Water Act (CWA)

Safe Drinking Water Act

Priority pollutant Toxic pollutant

Section 112(r) (40 CFR

68.130)

Not regulated.

(SDWA)

US state regulations

US - New Jersey RTK - Substances: Listed substance

Benzo(b)fluoranthene (CAS 205-99-2)

US - Pennsylvania RTK - Hazardous Substances: Special hazard

Benzo(b)fluoranthene (CAS 205-99-2)

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd.

(a))

Benzo(b)fluoranthene (CAS 205-99-2)

US. Massachusetts RTK - Substance List

Benzo(b)fluoranthene (CAS 205-99-2)

US. New Jersey Worker and Community Right-to-Know Act

Benzo(b)fluoranthene (CAS 205-99-2)

US. Pennsylvania RTK - Hazardous Substances

Benzo(b)fluoranthene (CAS 205-99-2)

US. Pennsylvania Worker and Community Right-to-Know Law

Benzo(b)fluoranthene (CAS 205-99-2)

US. Rhode Island RTK

Benzo(b)fluoranthene (CAS 205-99-2)

Material name: Benzo(b)fluoranthene

N-11165 Version #: 01 Issue date: 04-29-2015

SDS US

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

Benzo(b)fluoranthene (CAS 205-99-2) Listed: July 1, 1987

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	No
Canada	Domestic Substances List (DSL)	No
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No

Japan Inventory of Existing and New Chemical Substances (ENCS) No
Korea Existing Chemicals List (ECL) No
New Zealand New Zealand Inventory Yes
Philippines Philippine Inventory of Chemicals and Chemical Substances

(PICCS)

United States & Puerto Rico Toxic Substances Control Act (TSCA) Inventory

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 04-29-2015

Version # 01

NFPA ratings Health: 0

Flammability: 0 Instability: 0

Disclaimer

The above information is believed to be correct on the date it was last revised and must not be considered all inclusive. The information has been obtained only by a search of available literature and is only a guide for handling the chemicals. OSHA regulations require that if other hazards become evident, an upgraded SDS must be made available to the employee within three months. RESPONSIBILITY for updates lies with the employer and not with CHEM SERVICE, Inc.

Persons not specifically and properly trained should not handle this chemical or its container. This product is furnished FOR LABORATORY USE ONLY! Our products may NOT BE USED as drugs, cosmetics, agricultural or pesticide products, food additives or as household chemicals.

This Safety Data Sheet (SDS) is intended only for use with Chem Service, Inc. products and should not be relied on for use with materials from any other supplier even if the chemical name(s) on the product are identical! Whenever using an SDS for a solution or mixture the user should refer to the SDS for every component of the solution or mixture. Chem Service warrants that this SDS is based upon the most current information available to Chem Service at the time it was last revised. THIS WARRANTY IS EXCLUSIVE, AND CHEM SERVICE, INC. MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. This SDS is provided gratis and CHEM SERVICE, INC. SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR CONTINGENT DAMAGES.

Copyright © 2000-2014 Chem Service, Inc. All rights reserved except that this SDS may be printed for the use of a customer or prospective customer of Chem Service, Inc provided the entire SDS is printed. The SDS may not be placed in any database or otherwise stored or distributed in electronic or any other form.

This product is furnished FOR LABORATORY USE ONLY.

Material name: Benzo(b)fluoranthene

No



SAFETY DATA SHEET

Revision Date 14-Feb-2020 Revision Number 2

1. Identification

Product Name Benzo[a]pyrene

Cat No.: 15856

CAS-No 50-32-8

Synonyms Benzo[def]chrysene.; 3,4-Benzopyrene; 3,4-Benzpyrene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Alfa Aesar

Thermo Fisher Scientific Chemicals, Inc.

30 Bond Street

Ward Hill, MA 01835-8099

Tel: 800-343-0660 Fax: 800-322-4757 **Email:** tech@alfa.com

www.alfa.com

Emergency Telephone Number

During normal business hours (Monday-Friday, 8am-7pm EST), call (800) 343-0660.

After normal business hours, call Carechem 24 at (866) 928-0789.

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin SensitizationCategory 1Germ Cell MutagenicityCategory 1BCarcinogenicityCategory 1AReproductive ToxicityCategory 1B

Label Elements

Signal Word

Danger

Hazard Statements

May cause an allergic skin reaction

May cause genetic defects

May cause cancer

May damage fertility. May damage the unborn child



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Avoid breathing dust/fume/gas/mist/vapors/spray

Contaminated work clothing should not be allowed out of the workplace

Wear protective gloves

Response

IF exposed or concerned: Get medical attention/advice

Skin

IF ON SKIN: Wash with plenty of soap and water

If skin irritation or rash occurs: Get medical advice/attention

Wash contaminated clothing before reuse

Storage

Store locked up

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

WARNING. Cancer - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Benzo[a]pyrene	50-32-8	> 96

4. First-aid measures

General Advice If symptoms persist, call a physician.

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists,

call a physician.

Inhalation Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if

symptoms occur.

Ingestion Clean mouth with water and drink afterwards plenty of water. Get medical attention if

symptoms occur.

Most important symptoms and

effects

None reasonably foreseeable. May cause allergic skin reaction. Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and

feet, dizziness, lightheadedness, chest pain, muscle pain or flushing

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media No information available

Flash Point No information available Method - No information available

Autoignition Temperature

Explosion Limits

Not applicable

Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Do not allow run-off from fire-fighting to enter drains or water courses.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO2).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

HealthFlammabilityInstabilityPhysical hazards210N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment as required. Avoid dust

formation.

Environmental PrecautionsDo not flush into surface water or sanitary sewer system. Do not allow material to

contaminate ground water system. Prevent product from entering drains. Local authorities

should be advised if significant spillages cannot be contained.

Methods for Containment and Clean Sweep up and shovel into suitable containers for disposal. Keep in suitable, closed **Up**

5

7. Handling and storage

Handling Wear personal protective equipment/face protection. Ensure adequate ventilation. Do not

get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Avoid dust formation.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Benzo[a]pyrene		TWA: 0.2 mg/m ³		

Legend

OSHA - Occupational Safety and Health Administration

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StatePowder SolidAppearanceDark yellowOdoraromatic

Odor Threshold No information available

pH Not applicable

 Melting Point/Range
 175 - 179 °C / 347 - 354.2 °F

 Boiling Point/Range
 495 °C / 923 °F @ 760 mmHg

Flash Point No information available

Evaporation Rate Not applicable

Flammability (solid,gas) No information available

Flammability or explosive limits

UpperNo data availableLowerNo data availableVapor PressureNo information available

Vapor Density Not applicable

Specific GravityNo information availableSolubilityInsoluble in waterPartition coefficient; n-octanol/waterNo data available

Autoignition Temperature Not applicable

Decomposition TemperatureNo information available

ViscosityNot applicableMolecular FormulaC20H12Molecular Weight252.31

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products.

Incompatible Materials Oxidizing agent

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information Component Information

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Revision Date 14-Feb-2020 Benzo[a]pyrene

Irritation No information available

Sensitization May cause sensitization by skin contact

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Benzo[a]pyrene	50-32-8	Group 1	Reasonably	A2	X	A2
			Anticipated			

IARC (International Agency for Research on Cancer)

IARC (International Agency for Research on Cancer)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans Group 2B - Possibly Carcinogenic to Humans

NTP: (National Toxicity Program) NTP: (National Toxicity Program) Known - Known Carcinogen

Reasonably Anticipated - Reasonably Anticipated to be a Human

Carcinogen

A1 - Known Human Carcinogen ACGIH: (American Conference of Governmental Industrial

Hygienists)

A2 - Suspected Human Carcinogen

A3 - Animal Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

Mutagenic Effects No information available

Reproductive Effects No information available.

No information available. **Developmental Effects**

Teratogenicity No information available.

STOT - single exposure None known STOT - repeated exposure None known

No information available **Aspiration hazard**

delayed

Symptoms / effects, both acute and Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing

Endocrine Disruptor Information

Component	EU - Endocrine Disrupters	EU - Endocrine Disruptors -	Japan - Endocrine Disruptor
	Candidate List	Evaluated Substances	Information
Benzo[a]pyrene	Group III Chemical	Not applicable	Not applicable

Other Adverse Effects

The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Persistence and Degradability May persist

Bioaccumulation/ Accumulation No information available.

Mobility Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Benzo[a]pyrene	6.06

13. Disposal considerations

Chemical waste generators must determine whether a discarded chemical is classified as a **Waste Disposal Methods**

hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Benzo[a]pyrene - 50-32-8	U022	-

14. Transport information

DOT

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Technical Name Benzo[a]pyrene

Hazard Class 9
Packing Group III

TDG

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

<u>IATA</u>

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

IMDG/IMO

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Benzo[a]pyrene	50-32-8	X	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Benzo[a]pyrene	50-32-8	X	1	200-028-5	X	Ī	1	Χ	KE-05-0184

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Benzo[a]pyrene	50-32-8	> 96	0.1

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Benzo[a]pyrene	-	-	X	X

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA Not applicable

Component	Hazardous Substances RQs	CERCLA EHS RQs
Benzo[a]pyrene	1 lb	-

California Proposition 65 This product contains the following Proposition 65 chemicals.

	Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
ſ	Benzo[a]pyrene	50-32-8	Carcinogen	0.06 μg/day	Carcinogen

U.S. State Right-to-Know

Regulations

	Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Γ	Benzo[a]pyrene	Χ	X	Х	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Health, Safety and Environmental Department

Email: tech@alfa.com

www.alfa.com

Revision Date 14-Feb-2020 Print Date 14-Feb-2020

Revision Summary SDS authoring systems update, replaces ChemGes SDS No. 50-32-8/1.

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Creation Date 03-May-2012 Revision Date 19-Jan-2018 Revision Number 4

1. Identification

Product Name Benzo[ghi]perylene

Cat No.: AC105550000; AC105550050; AC105550250; AC105551000

CAS-No 191-24-2

Synonyms 1,12-Benzoperylene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

Classification under 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Label Elements

None required

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition/Information on Ingredients

Component	CAS-No	Weight %

Benzo[ghi]perylene Revision Date 19-Jan-2018

Benzo(ghi)perylene	191-24-2	>95

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

clothes and shoes. Get medical attention.

Inhalation Remove from exposure, lie down. Remove to fresh air. If not breathing, give artificial

respiration. Get medical attention.

Ingestion Clean mouth with water. Get medical attention.

Most important symptoms and

effects

No information available.

No information available

Notes to Physician

Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media No information available

Flash Point No information available

Method - No information available

Autoignition Temperature

Explosion Limits

Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Do not allow run-off from fire-fighting to enter drains or water courses.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO2).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

HealthFlammabilityInstabilityPhysical hazards010N/A

6. Accidental release measures

Personal Precautions
Environmental Precautions

Ensure adequate ventilation. Use personal protective equipment as required.

Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained. See Section 12 for additional Ecological Information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Avoid dust formation. Sweep up and shovel into suitable containers for disposal. Do not let **Up** this chemical enter the environment.

7. Handling and storage

Benzo[ghi]perylene Revision Date 19-Jan-2018

Handling Avoid contact with skin and eyes. Do not breathe dust.

Storage Keep in a dry, cool and well-ventilated place. Refer product specification and/or product

label for specific storage temperature requirement. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure

limitsestablished by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face ProtectionWear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory ProtectionNo protective equipment is needed under normal use conditions.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State Solid Appearance Yellow

Odor No information available
Odor Threshold No information available
No information available
No information available

pH No information available

Melting Point/Range 276 - 280 °C / 528.8 - 536 °F

Boiling Point/Range > 500 °C @ 760 mmHg **Flash Point** No information available

Evaporation Rate Not applicable

Flammability (solid,gas) No information available

Flammability or explosive limits

UpperNo data availableLowerNo data availableVapor PressureNo information available

Vapor Density

Not applicable

Specific Gravity
Solubility
No information available
Insoluble in water
No data available
No data available

Autoignition TemperatureNo information availableDecomposition TemperatureNo information available

Viscosity
Molecular Formula
Molecular Weight
Not applicable
C22 H12
276.33

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under recommended storage conditions.

Conditions to Avoid Excess heat. Exposure to light. Incompatible products.

Revision Date 19-Jan-2018 Benzo[ghi]perylene

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

No acute toxicity information is available for this product

Component Information

Toxicologically Synergistic

No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

The table below indicates whether each agency has listed any ingredient as a carcinogen. Carcinogenicity

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Benzo(ghi)perylene	191-24-2	Not listed				

No information available **Mutagenic Effects**

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects,both acute and No information available

delayed

Endocrine Disruptor Information No information available

The toxicological properties have not been fully investigated. Other Adverse Effects

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Persistence and Degradability Insoluble in water May persist

No information available. **Bioaccumulation/ Accumulation**

Mobility . Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Benzo(ghi)perylene	6.58

Benzo[ghi]perylene Revision Date 19-Jan-2018

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Technical Name Benzo(ghi)perylene

Hazard Class 9
Packing Group III

TDG

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

IATA

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

IMDG/IMO

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Benzo(ghi)perylene	191-24-2	=	-	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed '-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Benzo(ghi)perylene	191-24-2	-	-	205-883-8	-	-	- 1	-	-

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Benzo(ghi)perylene	191-24-2	>95	1.0 0.1

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Benzo[ghi]perylene Revision Date 19-Jan-2018

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Benzo(ghi)perylene	-	-	-	X

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Benzo(ghi)perylene	5000 lb	-

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

Co	mponent	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Benzo	(ghi)perylene	X	X	X	X	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 03-May-2012

 Revision Date
 19-Jan-2018

 Print Date
 19-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Revision Date 17-Jan-2018 Revision Number 3

1. Identification

Product Name Cadmium

Cat No. : C3-500

CAS-No 7440-43-9

Synonyms No information available

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable solids Category 2 Acute oral toxicity Category 4 Acute dermal toxicity Category 4 Acute Inhalation Toxicity - Dusts and Mists Category 2 Germ Cell Mutagenicity Category 2 Carcinogenicity Category 1A Reproductive Toxicity Category 2 Specific target organ toxicity (single exposure) Category 3

Target Organs - Respiratory system.

Specific target organ toxicity - (repeated exposure) Category 1

Target Organs - Kidney, Blood.

Combustible dust Yes

Label Elements

Signal Word

Danger

Hazard Statements

Flammable solid

May form combustible dust concentrations in air

Fatal if inhaled

Harmful if swallowed

Harmful in contact with skin

May cause respiratory irritation

Suspected of causing genetic defects

May cause cancer

Suspected of damaging fertility. Suspected of damaging the unborn child

Causes damage to organs through prolonged or repeated exposure



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Do not breathe dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Immediately call a POISON CENTER or doctor/physician

Skin

IF ON SKIN: Wash with plenty of soap and water

Wash contaminated clothing before reuse

Call a POISON CENTER or doctor/physician if you feel unwell

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

Rinse mouth

Fire

Fight fire with normal precautions from a reasonable distance

Evacuate area

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

WARNING. Cancer and Reproductive Harm - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component CAS-No Weight %

Cadmium	7440-43-9	100

4. First-aid measures

General Advice Show this safety data sheet to the doctor in attendance. Immediate medical attention is

required.

Eve Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. In

the case of contact with eyes, rinse immediately with plenty of water and seek medical

advice.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Immediate medical

attention is required.

Inhalation Move to fresh air. If not breathing, give artificial respiration. Do not use mouth-to-mouth

method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.

Immediate medical attention is required.

Ingestion Do not induce vomiting. Call a physician or Poison Control Center immediately.

Most important symptoms and

effects

None reasonably foreseeable. . Kidney disorders: May cause harm to the unborn child:

Blood disorders

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media No information available

Flash Point No information available Method - No information available

Autoignition Temperature

Explosion Limits

No information available

Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Thermal decomposition can lead to release of irritating gases and vapors. Fine dust dispersed in air may ignite. Dust can form an explosive mixture in air. Pyrophoric properties of solids and liquids. Do not allow run-off from fire fighting to enter drains or water courses.

Hazardous Combustion Products

Highly toxic fumes

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

NFPA

HealthFlammabilityInstabilityPhysical hazards410N/A

6. Accidental release measures

Personal Precautions

Environmental Precautions

Ensure adequate ventilation. Use personal protective equipment. Avoid dust formation. Keep people away from and upwind of spill/leak. Evacuate personnel to safe areas. Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities

should be advised if significant spillages cannot be contained.

Methods for Containment and Clean Sweep up or vacuum up spillage and collect in suitable container for disposal. Avoid dust **Up**

7. Handling and storage

Handling Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Avoid dust

formation. Use only under a chemical fume hood. Do not breathe vapors/dust. Do not

ingest.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place. Store under an inert

atmosphere.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Cadmium	TWA: 0.01 mg/m ³ TWA: 0.002 mg/m ³	Ceiling: 0.3 mg/m³ Ceiling: 0.6 mg/m³ (Vacated) STEL: 0.3 ppm TWA: 0.1 mg/m³ TWA: 0.2 mg/m³ TWA: 5 µg/m³	IDLH: 9 mg/m ³	TWA: 0.01 mg/m ³ TWA: 0.002 mg/m ³

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering MeasuresUse only under a chemical fume hood. Ensure that eyewash stations and safety showers

are close to the workstation location.

Personal Protective Equipment

Eve/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Long sleeved clothing.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures When using, do not eat, drink or smoke. Provide regular cleaning of equipment, work area

and clothing. Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product. Keep away from food, drink and animal feeding

stuffs.

9. Physical and chemical properties

Physical StateSolidAppearanceSilverOdorOdorless

Odor ThresholdNo information availablepHNo information available

Melting Point/Range 321 °C / 609.8 °F

Boiling Point/Range 765 °C / 1409 °F @ 760 mmHg

Flash Point No information available

Evaporation Rate Not applicable

Flammability (solid,gas) No information available

Flammability or explosive limits

UpperNo data availableLowerNo data availableVapor PressureNo information available

Vapor DensityNot applicableSpecific Gravity8.64 @ 25°CSolubilityInsoluble in waterPartition coefficient; n-octanol/waterNo data availableAutoignition TemperatureNo information available

Decomposition TemperatureNo information available

Viscosity Not applicable

Molecular FormulaCdMolecular Weight112.40

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under recommended storage conditions. Moisture sensitive. Air sensitive.

Conditions to Avoid Incompatible products. Excess heat. Avoid dust formation. Exposure to air or moisture over

prolonged periods.

Incompatible Materials Strong oxidizing agents, Strong acids, Sulfur oxides

Hazardous Decomposition Products Highly toxic fumes

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information Component Information

oomponent imormation			
Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Cadmium	LD50 = 2330 mg/kg (Rat)	Not listed	$LC50 = 25 \text{ mg/m}^3 \text{ (Rat) } 30 \text{ min}$

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Cadmium	7440-43-9	Group 1	Known	A2	l x	A2

IARC: (International Agency for Research on Cancer)

IARC: (International Agency for Research on Cancer)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans Group 2B - Possibly Carcinogenic to Humans

NTP: (National Toxicity Program) NTP: (National Toxicity Program)

Known - Known Carcinogen

Reasonably Anticipated - Reasonably Anticipated to be a Human

Carcinogen

ACGIH: (American Conference of Governmental Industrial

Hygienists)

A1 - Known Human Carcinogen A2 - Suspected Human Carcinogen

A3 - Animal Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

Mutagenic Effects Possible risk of irreversible effects

Reproductive Effects Possible risk of impaired fertility. May cause harm to the unborn child.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system **STOT - repeated exposure** Kidney Blood

Aspiration hazard No information available

Symptoms / effects,both acute and Kidney disorders: May cause harm to the unborn child: Blood disorders

delayed

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information



Ecotoxicity

The product contains following substances which are hazardous for the environment. Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Cadmium	Not listed	LC50: 0.0004 - 0.003 mg/L,	Not listed	EC50: = 0.0244 mg/L, 48h
		96h (Pimephales promelas)		Static (Daphnia magna)
		LC50: = 0.016 mg/L, 96h		
		(Oryzias latipes)		
		LC50: = 21.1 mg/L, 96h		
		flow-through (Lepomis		
		macrochirus)		
		LC50: = 0.24 mg/L, 96h		
		static (Cyprinus carpio)		
		LC50: = 4.26 mg/L, 96h		
		semi-static (Cyprinus carpio)		
		LC50: = 0.002 mg/L, 96h		
		(Cyprinus carpio)		
		LC50: = 0.006 mg/L, 96h		
		static (Oncorhynchus		
		mykiss)		
		LC50: = 0.003 mg/L, 96h		

	flow-through (Oncorhynchus	
	mykiss)	

Persistence and Degradability

No information available

Bioaccumulation/ Accumulation

No information available.

Mobility No information available.

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN2930

Proper Shipping Name TOXIC SOLIDS, FLAMMABLE, ORGANIC, N.O.S.

Proper technical name
Hazard Class
Subsidiary Hazard Class
Packing Group
Cadmium
6.1
4.1
I

TDG

UN-No UN2930

Proper Shipping Name TOXIC SOLID, FLAMMABLE, ORGANIC, N.O.S.

Hazard Class 6.1
Subsidiary Hazard Class 4.1
Packing Group

IATA

UN-No UN2930

Proper Shipping Name TOXIC SOLID, FLAMMABLE, ORGANIC, N.O.S.

Hazard Class 6.1 Subsidiary Hazard Class 4.1 Packing Group

IMDG/IMO

UN-No UN2930

Proper Shipping Name TOXIC SOLID, FLAMMABLE, ORGANIC, N.O.S.

Hazard Class 6.1
Subsidiary Hazard Class 4.1
Packing Group |

15. Regulatory information

International Inventories

	Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Ī	Cadmium	Х	Х	-	231-152-8	-		Х	-	Χ	Х	KE-0439
-												7

Legend:

- X Listed
- E Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.
- F Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
- N Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
- P Indicates a commenced PMN substance
- R Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
- S Indicates a substance that is identified in a proposed or final Significant New Use Rule
- T Indicates a substance that is the subject of a Section 4 test rule under TSCA.
- XU Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).
- Y1 Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Revision Date 17-Jan-2018

Cadmium

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b)

Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Cadmium	7440-43-9	100	0.1

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

	Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants	
Γ	Cadmium	-	-	X	X	

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Cadmium	X		-

OSHA Occupational Safety and Health Administration Not applicable

Component		Specifically Regulated Chemicals	Highly Hazardous Chemicals
	Cadmium	5 μg/m³ TWA	-
		2.5 µg/m³ Action Level	

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Cadmium	10 lb	-

California Proposition 65

This product contains the following proposition 65 chemicals

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Cadmium	7440-43-9	Carcinogen	0.05 μg/day	Developmental
		Developmental		Carcinogen
		Male Reproductive		_

U.S. State Right-to-Know

Regulations

. togalaliono					
Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Cadmium	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): Y
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

Revision Date17-Jan-2018Print Date17-Jan-2018

Revision SummaryThis document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SDS #: 237

Revision Date: January 26, 2016

Safety Data Sheet (SDS)

SECTION 1 — CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Signal Word WARNING

Chromium Metal

Flinn Scientific, Inc. P.O. Box 219, Batavia, IL 60510 (800) 452-1261

Chemtrec Emergency Phone Number: (800) 424-9615

Pictograms

SECTION 2 — HAZARDS IDENTIFICATION

Hazard class: Hazardous to the aquatic environment, chronic toxicity (Category 1). Very toxic to aquatic life with long lasting effects (H410).



Chromium (CAS 7440-47-3) is an IARC Group 3-Not Classifiable as to its carcinogenicity to humans

SECTION 3 — COMPOSITION, INFORMATION ON INGREDIENTS

Component Name	CAS Number	Formula	Formula Weight	Concentration
Chromium	7440-47-3	Cr	52	
Synonyms: Chrome				

SECTION 4 — FIRST AID MEASURES

If exposed or concerned: Get medical advice or attention (P308+P313).

If inhaled: Remove victim to fresh air and keep at rest in a position comfortable for breathing (P304+P340).

If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing.

If on skin: Wash with plenty of water.

If swallowed: Rinse mouth. Immediately call a POISON CENTER or physician (P301+P310+P330).

SECTION 5 — FIRE FIGHTING MEASURES

Nonflammable, noncombustible metal.

NFPA Code

Moderate fire hazard in the form of dust.

None established

In case of fire: Use a tri-class dry chemical fire extinguisher.

SECTION 6 — ACCIDENTAL RELEASE MEASURES

Remove all ignition sources and water. Sweep up the spill, place in a sealed bag or container, and dispose. Ventilate area and wash spill site after material pickup is complete. See Sections 8 and 13 for further information.

SECTION 7 — HANDLING AND STORAGE

Flinn Suggested Chemical Storage Pattern: Inorganic #1. Store with metals and metal hydrides.

Use only in a hood or well-ventilated area (P271).

SECTION 8 — EXPOSURE CONTROLS, PERSONAL PROTECTION

Wear protective gloves, protective clothing, and eye protection. Wash hands thoroughly after handling (P264). Use only in a hood or well-ventilated area (P271).

Exposure guidelines: PEL 1 mg/m³ (OSHA); TLV 0.5 mg/m³ (ACGIH)

SECTION 9 — PHYSICAL AND CHEMICAL PROPERTIES

Silver, metallic solid. Odorless.

Soluble: Strong alkalies and acids, except nitric.

Melting point: 2680 °C

Melting point: 1900 °C

Specific gravity: 7.0-7.3

SECTION 10 — STABILITY AND REACTIVITY

Avoid contact with strong acids and strong oxidizers.

Shelf life: Indefinite, if stored properly.

SECTION 11 — TOXICOLOGICAL INFORMATION

Acute effects: Toxic, irritant. ORL-RAT LD $_{50}$: N.A. Chronic effects:N.A. IHL-RAT LC $_{50}$: N.A. Target organs: N.A. SKN-RBT LD $_{50}$: N.A.

SECTION 12 — ECOLOGICAL INFORMATION

Data not yet available.

SECTION 13 — DISPOSAL CONSIDERATIONS

Please review all federal, state and local regulations that may apply before proceeding.

Flinn Suggested Disposal Method #27f is one option.

SECTION 14 — TRANSPORT INFORMATION

Shipping name: Not regulated. Hazard class: N/A. UN number: N/A.

SECTION 15 — REGULATORY INFORMATION

TSCA-listed, EINECS-listed (231-157-5), RCRA code D007.

SECTION 16 — OTHER INFORMATION

This Safety Data Sheet (SDS) is for guidance and is based upon information and tests believed to be reliable. Flinn Scientific, Inc. makes no guarantee of the accuracy or completeness of the data and shall not be liable for any damages relating thereto. The data is offered solely for your consideration, investigation, and verification. The data should not be confused with local, state, federal or insurance mandates, regulations, or requirements and CONSTITUTE NO WARRANTY. Any use of this data and information must be determined by the science instructor to be in accordance with applicable local, state or federal laws and regulations. The conditions or methods of handling, storage, use and disposal of the product(s) described are beyond the control of Flinn Scientific, Inc. and may be beyond our knowledge. FOR THIS AND OTHER REASONS, WE DO NOT ASSUME RESPONSIBILITY AND EXPRESSLY DISCLAIM LIABILITY FOR LOSS, DAMAGE OR EXPENSE ARISING OUT OF OR IN ANY WAY CONNECTED WITH THE HANDLING, STORAGE, USE OR DISPOSAL OF THIS PRODUCT(S).

N.A. = Not available, not all health aspects of this substance have been fully investigated.

Consult your copy of the Flinn Science Catalog/Reference Manual for additional information about laboratory chemicals.

Revision Date: January 26, 2016



SAFETY DATA SHEET

Creation Date 22-Sep-2009 Revision Date 23-Jan-2018 Revision Number 3

1. Identification

Product Name cis-1,2-Dichloroethylene

Cat No.: AC113380000; AC113380025; AC113380100; AC113380500

Synonyms cis-Acetylene dichloride.

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids

Acute oral toxicity

Category 4

Acute Inhalation Toxicity - Vapors

Skin Corrosion/Irritation

Serious Eye Damage/Eye Irritation

Specific target organ toxicity (single exposure)

Category 2

Category 2

Category 3

Target Organs - Respiratory system.

Label Elements

Signal Word

Danger

Hazard Statements

Highly flammable liquid and vapor Harmful if swallowed Harmful if inhaled

Causes serious eye irritation Causes skin irritation May cause respiratory irritation



Precautionary Statements

Prevention

Wear protective gloves/protective clothing/eye protection/face protection

Use only outdoors or in a well-ventilated area

Avoid breathing dust/fume/gas/mist/vapors/spray

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Take precautionary measures against static discharge

Do not eat, drink or smoke when using this product

Response

Call a POISON CENTER or doctor/physician if you feel unwell

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Call a POISON CENTER or doctor/physician if you feel unwell

Skin

IF ON SKIN: Wash with plenty of soap and water

Take off contaminated clothing and wash before reuse

If skin irritation occurs: Get medical advice/attention

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Ingestion

Rinse mouth

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

Fire

Explosion risk in case of fire

Fight fire with normal precautions from a reasonable distance

Evacuate area

Storage

Store in a well-ventilated place. Keep cool

Store in a closed container

Store locked up

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

None identified

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
cis-1,2-Dichloroethylene	156-59-2	97

4. First-aid measures

Eve Contact Rinse immediately with plenty of water, also under the evelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Get medical attention.

Remove to fresh air. Get medical attention. If not breathing, give artificial respiration. Inhalation

Do NOT induce vomiting. Get medical attention. Ingestion

Most important symptoms and

effects

Notes to Physician

Difficulty in breathing. Inhalation of high vapor concentrations may cause symptoms like

headache, dizziness, tiredness, nausea and vomiting

Treat symptomatically

5. Fire-fighting measures

Water spray. Carbon dioxide (CO₂). Dry chemical. Water mist may be used to cool closed **Suitable Extinguishing Media**

containers. Chemical foam. Water mist may be used to cool closed containers.

No information available **Unsuitable Extinguishing Media**

6 °C / 42.8 °F **Flash Point**

Method -No information available

440 °C / 824 °F **Autoignition Temperature**

Explosion Limits

12.80% Upper Lower 9.70%

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Vapors may travel to source of ignition and flash back. Containers may explode when heated. Vapors may form explosive mixtures with air.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO2). Hydrogen chloride gas.

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health **Flammability** Instability Physical hazards 2 3 0 N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment as required. Remove all

sources of ignition. Take precautionary measures against static discharges. Avoid contact

with skin, eyes or clothing.

See Section 12 for additional Ecological Information. Do not flush into surface water or **Environmental Precautions**

sanitary sewer system.

Methods for Containment and Clean Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Keep in suitable, closed containers for disposal. Remove all sources of ignition.

Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Handling

Ensure adequate ventilation. Wear personal protective equipment/face protection. Use spark-proof tools and explosion-proof equipment. Use only non-sparking tools. Avoid contact with skin, eyes or clothing. Avoid breathing dust/fume/gas/mist/vapors/spray. Avoid ingestion and inhalation. Keep away from open flames, hot surfaces and sources of ignition. Take precautionary measures against static discharges. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded.

Storage

Keep in a dry, cool and well-ventilated place. Refer product specification and/or product label for specific storage temperature requirement. Keep container tightly closed. Keep away from heat, sparks and flame. Flammables area. Keep container tightly closed in a dry and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
cis-1,2-Dichloroethylene	TWA: 200 ppm			TWA: 200 ppm

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

Ensure adequate ventilation, especially in confined areas. Use explosion-proof **Engineering Measures**

electrical/ventilating/lighting/equipment. Ensure that eyewash stations and safety showers

are close to the workstation location.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection No protective equipment is needed under normal use conditions.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State Liquid **Appearance** Colorless aromatic Odor

No information available **Odor Threshold** рΗ No information available Melting Point/Range -80 °C / -112 °F

Boiling Point/Range 60 °C / 140 °F @ 760 mmHg

6 °C / 42.8 °F **Flash Point Evaporation Rate** No information available

Flammability (solid.gas) Not applicable

Flammability or explosive limits

12.80% Upper Lower 9.70%

Vapor Pressure 201 mmHg @ 25 °C **Vapor Density** 3.34 (Air = 1.0)1.280

Specific Gravity

Solubility No information available Partition coefficient; n-octanol/water No data available

Autoignition Temperature Decomposition Temperature Viscosity

No information available **Molecular Formula** C2 H2 Cl2

Molecular Weight 96.94

10. Stability and reactivity

None known, based on information available **Reactive Hazard**

Stability Stable under normal conditions.

Conditions to Avoid Keep away from open flames, hot surfaces and sources of ignition. Exposure to air.

Exposure to light. Incompatible products. Exposure to moist air or water.

440 °C / 824 °F

No information available

Incompatible Materials Bases

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2), Hydrogen chloride gas

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information Component Information

Toxicologically Synergistic No information available

Products

delayed

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Irritating to eyes, respiratory system and skin

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
cis-1,2-Dichloroethylen	156-59-2	Not listed				
е						

Mutagenic Effects No information available

Reproductive Effects No information available. No information available. **Developmental Effects**

No information available. **Teratogenicity**

STOT - single exposure Respiratory system STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects,both acute and Inhalation of high vapor concentrations may cause symptoms like headache, dizziness,

tiredness, nausea and vomiting

Endocrine Disruptor Information No information available

The toxicological properties have not been fully investigated. Other Adverse Effects

Revision Date 23-Jan-2018

12. Ecological information

Ecotoxicity

Do not empty into drains. Do not flush into surface water or sanitary sewer system. Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
cis-1,2-Dichloroethylene	Not listed	Not listed	EC50 = 721 mg/L 5 min	Not listed
			EC50 = 905 mg/L 30 min	

Persistence and Degradability

Persistence is unlikely based on information available.

Bioaccumulation/ Accumulation

No information available.

Mobility

Will likely be mobile in the environment due to its volatility.

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN1150

Proper Shipping Name 1,2-DICHLOROETHYLENE

Hazard Class 3
Packing Group ||

TDG UN-No

UN-No UN1150

Proper Shipping Name 1,2-DICHLOROETHYLENE

Hazard Class 3 Packing Group II

IATA

UN-No UN1150

Proper Shipping Name 1,2-DICHLOROETHYLENE

Hazard Class 3 Packing Group II

IMDG/IMO

UN-No UN1150

Proper Shipping Name 1,2-DICHLOROETHYLENE

Hazard Class 3
Packing Group ||

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
cis-1,2-Dichloroethylene	156-59-2	X	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

Revision Date 23-Jan-2018

cis-1,2-Dichloroethylene

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
cis-1,2-Dichloroethylene	156-59-2		X	205-859-7	-	X	Χ	Χ	KE-10124

U.S. Federal Regulations

SARA 313 Not applicable

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA

California Proposition 65 This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
cis-1,2-Dichloroethylene	Х	-	Х	-	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 22-Sep-2009

 Revision Date
 23-Jan-2018

 Print Date
 23-Jan-2018

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

Revision Date 23-Jan-2018

End of SDS

SAFETY DATA SHEET

SECTION 1 - CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

1.1 - Product Identifiers

Catalog Name: H-135N

Description: Dibenz(a,h)anthracene

CAS No.: 53-70-3

1.2 - Relevant Identified Uses of the Substance or Mixture

Laboratory Chemical Reference Material

1.3 - Supplier Details

Company: AccuStandard, Inc.

125 Market St.

New Haven, CT 06513 USA

Telephone Number: 203-786-5290

Fax: 203-786-5287

Email: edocs@accustandard.com

1.4 - Emergency Telephone Number

Emergency Phone #: AccuStandard, Inc.

1-203-786-5290

Hours: Monday to Friday 8:00am to 5:00pm EST


SECTION 2 - HAZARDS IDENTIFICATION

2.1 - GHS Label Elements











Signal Word: Danger

Hazard Codes:

H302 - Harmful if swallowed. (Acute toxicity, oral, category 4)

H315 - Irritating to skin. (Skin corrosion/irritation, category 2)

H320 - Irritating to eyes. (Eye damage/irritation, category 2B)

H350 - California Proposition 65 Warning: This product contains a component (or components) that may cause cancer in a concentration greater than or equal to 0.1%.

H350 - This product is or contains a component that is classified (ACGIH, IARC, NTP, OSHA) as a possible cancer hazard. (Carcinogenicity, category 1B)

H371 - May cause liver damage. (Specific target organ toxicity, single exposure, category 2)

H371 - May cause lung damage. (Specific target organ toxicity - single exposure, inhalation) Category 2

H402 - Harmful to fish and other water organisms.

H413 - May cause long-term adverse effects in the aquatic environment.

SDS Date: 10/13/2016 Page 1 of 6

SECTION 2 - HAZARDS IDENTIFICATION - continued

2.1 - GHS Label Elements - continued

Precautionary Codes:

P202 - This product should only by used by persons trained in the safe handling of hazardous chemicals.

P235 - Store in a cool dry place.

P260 - Do not breathe dust.

P262 - Do not get in eyes, on skin or clothing.

P264 - Wash thoroughly after handling. Do not take internally. Eye wash and safety equipment should be readily available.

P284 - Respiratory Protection: If workplace exposure limit(s) of product or any component is exceeded (see TLV/PEL), or a risk assessment shows air-purifying respirators are appropriate, use of a NIOSH/MSHA approved air supplied respirator is advised. Use a full-face respirator with multi-purpose combination (US) or type ABEK (EN14387) respirator cartridges in absence of proper environmental control. Always use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU). Engineering and/or administrative controls should be implemented to reduce exposure.

P338 - Eye contact: Immediately flush with plenty of water. After initial flushing, remove and contact lenses and continue flushing for at least 15 minutes. Assure adequate flushing by separating the eyelids with fingers.

P360 - Skin contact: Immediately wash skin with soap and plenty of water. Remove contaminated clothing. Get medical attention if symptoms occur. Wash clothing before reuse.

P404 - Store in a tightly closed container.

2.2 - Other Hazards

2.2.1 - Symptom of Exposure Health/Environment

Harmful.

May cause lung damage. (Specific target organ toxicity - single exposure, inhalation) Category 2

May cause liver damage. (Specific target organ toxicity, single exposure, category 2)

Causes photosensitivity. Exposure to light can result in allergic reactions resulting in dermatologic lesions.

Bioaccumulation of this chemical may occur. It is strongly advised that this substance does not enter the environment.

Harmful to fish and other water organisms. (H402)

May cause long-term adverse effects in the aquatic environment. (H413)

2.2.2 - Potential Health Effects

Irritating to eyes. (Eye damage/irritation, category 2B)

Irritating to skin. (Skin corrosion/irritation, category 2)

May be harmful if absorbed through the skin. (Acute toxicity, dermal, category 5)

Irritating to mucous membrane and upper respiratory system.

May be harmful if inhaled. (Acute toxicity, inhalation, category 5)

Harmful if swallowed. (Acute toxicity, oral, category 4)

2.2.3 - Routes of Entry

Inhalation, ingestion or skin contact.

2.2.4 - Carcinogenicity

California Proposition 65 cancer hazard.

This product is or contains a component that is classified (ACGIH, IARC, NTP, OSHA) as a possible cancer hazard. (Carcinogenicity, category 1B)

California Proposition 65 Warning: This product contains a component (or components) that may cause cancer in a concentration greater than or equal to 0.1%.

SDS Date: 10/13/2016 Page 2 of 6

SECTION 3 - COMPOSITION / ANALYTES DATA

Description: Dibenz(a,h)anthracene

Synonyms: 1,2:5,6-Dibenzanthracene; 1,2:5,6-Dibenz(a)anthracene

Molecular Weight: 278.35 Molecular Formula: C22H14

EC#: 200-181-8 Index#: 601-041-00-2

			ACGIH -TLV (mg/m³)		OSHA -PEL (mg/m³)			
Analyte	CAS Number	% Concentration	TWA	STEL	Skin	TWA	STEL	Skin
Dibenz(a,h)anthracene	53-70-3	100.000						

SECTION 4 - FIRST AID MEASURES

4.1 - First Aid Procedures - General

Get medical assistance for all cases of overexposure.

4.2 - Eye Contact

Eye contact: Immediately flush with plenty of water. After initial flushing, remove and contact lenses and continue flushing for at least 15 minutes. Assure adequate flushing by separating the eyelids with fingers. (P338)

4.3 - Skin Contact

Skin contact: Immediately wash skin with soap and plenty of water. Remove contaminated clothing. Get medical attention if symptoms occur. Wash clothing before reuse. (P360)

4.4 - Inhalation

Inhalation: Remove to fresh air. If not breathing, give artificial respiration or give oxygen by trained personnel. Seek immediate medical attention.

4.5 - Ingestion

Ingestion: Call a physician or poison control center immediately. ONLY induce vomiting at the instructions of a physician. Never give anything by mouth to an unconscious person.

SECTION 5 - FIRE FIGHTING MEASURES

5.1 - Flammable Properties

During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion.

5.2 - Extinguishing Media

Use alcohol foam, carbon dioxide, or dry chemical when fighting fires involving this material.

5.3 - Protection of Firefighters

As in any fire, wear self-contained breathing apparatus pressure demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

6.1 - Spill Response

Wear a self-contained breathing apparatus and appropriate Personal protection. Prevent contact with skin or eyes. Ventilate area. Avoid raising dust. Take up and containerize for proper disposal. Flush spill area with water. Comply with Federal, State, and local regulations.

SDS Date: 10/13/2016 Page 3 of 6

SECTION 7 - HANDLING AND STORAGE

Store in a tightly closed container. (P404)

Store in a cool dry place. (P235)

Do not breathe dust. (P260)

Use with adequate ventilation.

Do not get in eyes, on skin or clothing. (P262)

Avoid prolonged or repeated exposure.

This product should only by used by persons trained in the safe handling of hazardous chemicals. (P202)

SECTION 8 - EXPOSURE CONTROLS

8.1 - Engineering Controls/PPE

Wash thoroughly after handling. Do not take internally. Eye wash and safety equipment should be readily available. (P264)

8.2 - General Hygene Considerations

Respiratory Protection: If workplace exposure limit(s) of product or any component is exceeded (see TLV/PEL), or a risk assessment shows air-purifying respirators are appropriate, use of a NIOSH/MSHA approved air supplied respirator is advised. Use a full-face respirator with multi-purpose combination (US) or type ABEK (EN14387) respirator cartridges in absence of proper environmental control. Always use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU). Engineering and/or administrative controls should be implemented to reduce exposure.

Material should be handled or transferred in an approved fume hood or with adequate ventilation.

Compatible chemical-resistant protective gloves must be worn to prevent skin contact. Inspect gloves prior to use. Use proper glove removal technique to avoid contact with product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash hands thoroughly and dry.

Use eye protection tested and approved under the appropriate government standards such as NIOSH (US) or EN 166 (EU).

All recommendations are advisory only and must be evaluated by an industrial hygienist and/or safety officer familiar with the specific situation of anticipated use, such as concentration and amount of the substance in the workplace. Any recommendation should not be construed as offering an approval for any specific use of the product.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

Appearance: Crystalline solid

Odor: N/A

Odor Threshold: N/A

pH: N/A

Melting Point: 504 °F / 262 °C Boiling Point: 975 °F / 524 °C

Flash Point: N/A

Evaporation Rate (Butyl Acetate=1): N/A

Flammability Class: N/A

Lower Flammability Level: N/A Upper Flammability Level: N/A

Vapor Pressure: N/A

Vapor Density (Air = 1): N/A Specific Gravity: 1.28 g/cm3

SDS Date: 10/13/2016 Page 4 of 6

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES - continued

Solubility in Water: Insoluble
Partition Coefficient: log Pow: 6.5
Autoignition Temperature: N/A
Decomposition Temperature: N/A

Viscosity: N/A
VOC Content: N/A

Percent Volatile: Negligible

SECTION 10 - STABILITY AND REACTIVITY

Stability: Stable

Materials to Avoid: Oxidizers

Hazardous Decomposition: Oxides of carbon Hazardous Polymerization: Will not occur Condition to Avoid: Excessive heat

SECTION 11 - TOXICOLOGICAL INFORMATION

Human Health Toxicity

See section 2 for specific toxicological information for the ingredients of this product.

LD50 (Oral): N/A LD50 (Dermal): N/A LC50 (Inhalation): N/A

Dibenz[a,h]anthracene produced carcinomas in mice following oral or dermal exposure and injection site tumors in several species and has induced DNA damage and gene mutations in bacteria.

WARNING: This product contains chemical(s) known to the state of California to cause cancer. No other information related to the toxicological properties of this product is available at this time.

SECTION 12 - ECOLOGICAL INFORMATION

Environmental Toxicity

By complying with sections 6 and 7 there should be no release to the environment.

LC50 (Fish): N/A

EC50 (Aquatic Invertebrate): N/A

BCF: N/A

The potential for bioconcentration in aquatic organisms is considered high.

No other information related to the ecological properties of this product is available at this time.

SECTION 13 - DISPOSAL CONSIDERATIONS

Recycle or incinerate at any EPA approved facility or dispose in compliance with Federal, State and local regulations. Empty containers must be triple-rinsed prior to disposal.

SECTION 14 - TRANSPORT INFORMATION

Transportation Information (DOT/IATA)

SDS Date: 10/13/2016 Page 5 of 6

SECTION 14 - TRANSPORT INFORMATION - continued

UN Number: UN3077 UN Shipping Class: 9 UN Packing Group: III

UN Proper Shipping Name: Environmentally hazardous substance, solid, n.o.s. (Dibenz(a,h)anthracene)

Poison by Inhalation: No Marine Pollutant: No

SECTION 15 - REGULATORY INFORMATION

WARNING: This product contains chemical(s) known to the state of California to cause cancer.

This product is subject to SARA section 313 reporting requirements.

The CAS number of this product is listed on the TSCA Inventory.

For laboratory, research and development use only. Not for manufacturing or commercial purposes.

In addition to federal and state regulations, local regulations may apply. Check with your local regulatory authorities.

SECTION 16 - OTHER INFORMATION

This document has been designed to meet the requirements of OSHA, ANSI, GHS and CHIPs regulations.

The statements contained herein are offered for informational purposes only and are based on technical data that we believe to be accurate. The manufacturer will not assume any liability for the accuracy and completeness of this information. Final determination of the suitability of the material is the responsibility of the user. Although certain hazards are described herein, the user should not presume that these are the only hazards that exist. Since conditions and manner of use are outside of the manufacturers control, we make

NO WARRANTY OF MERCHANTABILITY, EXPRESSED OR IMPLIED, AND ASSUME NO LIABILITY RESULTING FROM ITS USE.

Legend: N/A = Not Available ND = Not Determined NR = Not Regulated

Alteration of any information contained herein without written permission from the manufacturer is strictly prohibited.

HMIS/NFPA HAZARD INDEX

- 0 Minimal
- 1 Slight
- 2 Moderate
- 3 Serious
- 4 Severe
- * Additional Hazard

GHS HAZARD INDEX

Category 1 - Most Severe Category 5 - Least Severe

**** End of Document ****

SDS Date: 10/13/2016 Page 6 of 6



SAFETY DATA SHEET

Creation Date 06-Aug-2010 Revision Date 17-Jan-2018 **Revision Number** 6

1. Identification

Product Name Ethylbenzene

O2751-1 Cat No.:

CAS-No 100-41-4

Ethylbenzol; Phenylethane **Synonyms**

Recommended Use Laboratory chemicals.

Uses advised against Not for food, drug, pesticide or biocidal product use

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids Category 2 Acute Inhalation Toxicity - Vapors Category 4 Carcinogenicity Category 2 Specific target organ toxicity (single exposure) Category 3 Target Organs - Respiratory system, Central nervous system (CNS). Specific target organ toxicity - (repeated exposure) Category 2

Aspiration Toxicity Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Highly flammable liquid and vapor May be fatal if swallowed and enters airways Harmful if inhaled May cause respiratory irritation

May cause drowsiness or dizziness

Suspected of causing cancer

May cause damage to organs through prolonged or repeated exposure

Ethylbenzene Revision Date 17-Jan-2018



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Use only outdoors or in a well-ventilated area

Do not breathe dust/fume/gas/mist/vapors/spray

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Keep cool

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Do NOT induce vomiting

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC) Harmful to aquatic life with long lasting effects

WARNING. Cancer - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Ethylbenzene	100-41-4	>95

4. First-aid measures

General Advice If symptoms persist, call a physician.

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Obtain medical attention.

Revision Date 17-Jan-2018 Ethylbenzene

Inhalation Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention. Aspiration

into lungs can produce severe lung damage.

Clean mouth with water and drink afterwards plenty of water. Do not induce vomiting. Call a Ingestion

physician or Poison Control Center immediately. If vomiting occurs naturally, have victim

lean forward.

Most important symptoms and

effects

Breathing difficulties. . Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting: May cause central nervous system

depression

Treat symptomatically Notes to Physician

Fire-fighting measures

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide. Cool closed Suitable Extinguishing Media

containers exposed to fire with water spray.

Unsuitable Extinguishing Media Do not use a solid water stream as it may scatter and spread fire

22 °C / 71 °F **Flash Point**

Method -No information available

432 °C / 810 °F **Autoignition Temperature**

Explosion Limits

Upper 6.8% Lower 1.2%

Sensitivity to Mechanical Impact No information available

Sensitivity to Static Discharge

Specific Hazards Arising from the Chemical

Flammable. Containers may explode when heated. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Keep product and empty container away from heat and sources of ignition. Thermal decomposition can lead to release of irritating gases and vapors.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO2)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
3	3	0	N/A

6. Accidental release measures

Personal Precautions

Use personal protective equipment. Ensure adequate ventilation. Remove all sources of

ignition. Take precautionary measures against static discharges.

Should not be released into the environment. Do not flush into surface water or sanitary **Environmental Precautions**

sewer system. See Section 12 for additional ecological information. Collect spillage.

Up

Methods for Containment and Clean Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Handling

Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Ensure adequate ventilation. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded. Take

Ethylbenzene Revision Date 17-Jan-2018

•

precautionary measures against static discharges.

Storage

Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat

and sources of ignition. Flammables area.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Ethylbenzene	TWA: 20 ppm	(Vacated) TWA: 100 ppm	IDLH: 800 ppm	TWA: 100 ppm
		(Vacated) TWA: 435 mg/m ³	TWA: 100 ppm	TWA: 435 mg/m ³
		(Vacated) STEL: 125 ppm	TWA: 435 mg/m ³	STEL: 125 ppm
		(Vacated) STEL: 545 mg/m ³	STEL: 125 ppm	STEL: 545 mg/m ³
		TWA: 100 ppm	STEL: 545 mg/m ³	
		TWA: 435 mg/m ³		

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures Use only under a chemical fume hood. Ensure that eyewash stations and safety showers

are close to the workstation location. Use explosion-proof

electrical/ventilating/lighting/equipment.

Personal Protective Equipment

Eye/face ProtectionWear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateLiquidAppearanceColorlessOdoraromatic

Odor Threshold

pH

No information available

No information available

pH No information available
Melting Point/Range -95 °C / -139 °F
Boiling Point/Range 136 °C / 276.8 °F
Flash Point 22 °C / 71 °F

Evaporation RateNo information available

Flammability (solid,gas) Not applicable

Flammability or explosive limits

Upper 6.8% **Lower** 1.2%

 Vapor Pressure
 No information available

 Vapor Density
 No information available

Specific Gravity 0.860

Solubility Slightly soluble in water Partition coefficient; n-octanol/water No data available

Ethylbenzene Revision Date 17-Jan-2018

Autoignition Temperature Decomposition Temperature

Viscosity

Molecular Formula Molecular Weight 432 °C / 810 °F No information available No information available

C8 H10 106.17

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products. Excess heat. Keep away from open flames, hot surfaces and

sources of ignition.

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Ethylbenzene	3500 mg/kg (Rat)	15400 mg/kg (Rabbit)	17.2 mg/L (Rat) 4 h

Toxicologically Synergistic

Products

No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation May cause eye, skin, and respiratory tract irritation

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Ethylbenzene	100-41-4	Group 2B	Not listed	A3	Χ	Not listed

IARC: (International Agency for Research on Cancer)

Group 2B - Possibly Carcinogenic to Humans IARC: (International Agency for Research on Cancer)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans

ACGIH: (American Conference of Governmental Industrial

Hygienists)

A1 - Known Human Carcinogen A2 - Suspected Human Carcinogen

A3 - Animal Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

Mutagenic Effects No information available

Reproductive Effects

No information available.

Developmental Effects

No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system Central nervous system (CNS)

STOT - repeated exposure None known

Revision Date 17-Jan-2018 Ethylbenzene

Aspiration hazard No information available

Symptoms / effects,both acute and Inhalation of high vapor concentrations may cause symptoms like headache, dizziness,

tiredness, nausea and vomiting: May cause central nervous system depression

Endocrine Disruptor Information No information available

Other Adverse Effects See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

delayed

Do not empty into drains. The product contains following substances which are hazardous for the environment. Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Ethylbenzene	EC50: 1.7 - 7.6 mg/L, 96h	LC50: 11.0 - 18.0 mg/L, 96h	EC50 = 9.68 mg/L 30 min	EC50: 1.8 - 2.4 mg/L, 48h
	static (Pseudokirchneriella	static (Oncorhynchus	EC50 = 96 mg/L 24 h	(Daphnia magna)
	subcapitata)	mykiss)		
	EC50: 2.6 - 11.3 mg/L, 72h	LC50: = 4.2 mg/L, 96h		
	static (Pseudokirchneriella	semi-static (Oncorhynchus		
	subcapitata)	mykiss)		
	EC50: > 438 mg/L, 96h	LC50: = 32 mg/L, 96h static		
	(Pseudokirchneriella	(Lepomis macrochirus)		
	subcapitata)	LC50: 7.55 - 11 mg/L, 96h		
	EC50: = 4.6 mg/L, 72h	flow-through (Pimephales		
	(Pseudokirchneriella	promelas)		
	subcapitata)	LC50: 9.1 - 15.6 mg/L, 96h		
		static (Pimephales		
		promelas)		
		LC50: = 9.6 mg/L, 96h static		
		(Poecilia reticulata)		

Persistence and Degradability

Insoluble in water Persistence is unlikely based on information available.

Bioaccumulation/ Accumulation

No information available.

Mobility

. Is not likely mobile in the environment due its low water solubility. Will likely be mobile in the environment due to its volatility.

Component	log Pow
Ethylhenzene	3.2

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN1175 **UN-No**

Proper Shipping Name ETHYLBENZENE

Hazard Class 3 **Packing Group** Ш

TDG

UN-No UN1175

Proper Shipping Name ETHYLBENZENE

Hazard Class 3 Ш **Packing Group**

IATA

Ethylbenzene Revision Date 17-Jan-2018

UN-No UN1175

Proper Shipping Name ETHYLBENZENE

Hazard Class 3
Packing Group ||

IMDG/IMO

UN-No UN1175

Proper Shipping Name ETHYLBENZENE

Hazard Class 3
Packing Group ||

15. Regulatory information

All of the components in the product are on the following Inventory lists: X = listed The product is classified and labeled according to EC directives or corresponding national laws The product is classified and labeled in accordance with Directive 1999/45/EC

International Inventories

	Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Γ	Ethylbenzene	Х	Х	-	202-849-4	-		Χ	Χ	Х	Х	Х

Legend:

- X Listed
- E Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.
- F Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
- N Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
- P Indicates a commenced PMN substance
- R Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
- S Indicates a substance that is identified in a proposed or final Significant New Use Rule
- T Indicates a substance that is the subject of a Section 4 test rule under TSCA.
- XU Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).
- Y1 Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.
- Y2 Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Ethylbenzene	100-41-4	>95	0.1

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Ethylbenzene	X	1000 lb	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Ethylbenzene	X		-

OSHA Occupational Safety and Health Administration Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Ethylbenzene Revision Date 17-Jan-2018

Component	Hazardous Substances RQs	CERCLA EHS RQs
Ethylbenzene	1000 lb	-

California Proposition 65

This product contains the following proposition 65 chemicals

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Ethylbenzene	100-41-4	Carcinogen	54 μg/day	Carcinogen
1			41 µg/day	

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Ethylbenzene	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade Serious risk, Grade 3

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 06-Aug-2010

 Revision Date
 17-Jan-2018

 Print Date
 17-Jan-2018

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Creation Date 09-Feb-2016 Revision Date 18-Jan-2018 Revision Number 3

1. Identification

Product Name Fluorene

Cat No.: AC156130000; AC156130250; AC156131000; AC156135000

CAS-No 86-73-7

Synonyms Diphenylenemethane

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Combustible dust Yes

Label Elements

Signal Word

Warning

Hazard Statements

May form combustible dust concentrations in air

Precautionary Statements

Storage

Store in a well-ventilated place. Keep container tightly closed

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Fluorene	86-73-7	>95

4. First-aid measures

General Advice If symptoms persist, call a physician.

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists,

call a physician.

Inhalation Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if

symptoms occur.

Ingestion Clean mouth with water and drink afterwards plenty of water. Get medical attention if

symptoms occur.

Most important symptoms and

effects

None reasonably foreseeable.

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Water spray, carbon dioxide (CO2), dry chemical, alcohol-resistant foam.

Unsuitable Extinguishing Media No information available

Flash Point 151 °C / 303.8 °F

Method - No information available

Autoignition Temperature

Explosion Limits

Not applicable

Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Do not allow run-off from fire-fighting to enter drains or water courses.

Hazardous Combustion Products

None known.

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Revision Date 18-Jan-2018 **Fluorene**

Health **Flammability** Instability Physical hazards N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment as required. Avoid dust

formation.

Do not flush into surface water or sanitary sewer system. Do not allow material to **Environmental Precautions**

contaminate ground water system. Prevent product from entering drains. Local authorities

should be advised if significant spillages cannot be contained.

Methods for Containment and Clean Sweep up and shovel into suitable containers for disposal. Keep in suitable, closed containers for disposal.

Up

7. Handling and storage

Wear personal protective equipment/face protection. Ensure adequate ventilation. Do not Handling

get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Avoid dust formation.

Keep in a dry, cool and well-ventilated place. Refer product specification and/or product Storage

label for specific storage temperature requirement. Keep container tightly closed.

Exposure controls / personal protection

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure

limitsestablished by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Wear appropriate protective eyeglasses or chemical safety goggles as described by **Eye/face Protection**

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

Wear appropriate protective gloves and clothing to prevent skin exposure. Skin and body protection

Respiratory Protection No protective equipment is needed under normal use conditions.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

9. Physical and chemical properties

Physical State Powder Solid **Appearance** Beige Odor Odorless

Odor Threshold No information available рΗ No information available

112 - 116 °C / 233.6 - 240.8 °F **Melting Point/Range** 298 °C / 568.4 °F @ 760 mmHg **Boiling Point/Range**

151 °C / 303.8 °F **Flash Point** Not applicable **Evaporation Rate**

Flammability (solid,gas) No information available

Flammability or explosive limits

Upper No data available Lower No data available 13 hPa @ 146 °C **Vapor Pressure Vapor Density** Not applicable

Specific Gravity 1.200

SolubilityInsoluble in waterPartition coefficient; n-octanol/waterNo data availableAutoignition TemperatureNot applicable

Decomposition TemperatureNo information available

ViscosityNot applicableMolecular FormulaC13 H10Molecular Weight166.22

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products.

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products None under normal use conditions

Hazardous PolymerizationNo information available.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information No acute toxicity information is available for this product

Component Information

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Fluorene	86-73-7	Not listed				

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects,both acute and No information available

delayed

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Fluorene	EC50 = 3.4 mg/L/96h	LC50 = 0.82 mg/L/96h	Not listed	Not listed

Persistence and Degradability

May persist

Bioaccumulation/ Accumulation

No information available.

Mobility

. Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Fluorene	4.18

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Technical NameFluoreneHazard Class9Packing GroupIII

TDG

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

<u>IATA</u>

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

IMDG/IMO

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Fluorene	86-73-7	X	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Fluorene	86-73-7	Х	-	201-695-5	Х	X	Χ	Х	98-3-1078

U.S. Federal Regulations

SARA 313

	Component	CAS-No	Weight %	SARA 313 - Threshold Values %
ſ	Fluorene	86-73-7	>95	0.1

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Fluorene	-	-	-	X

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA This material, as supplied, contains one or more substances regulated as a hazardous

substance under the Comprehensive Environmental Response Compensation and Liability

Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Fluorene	5000 lb	-

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

Compo	nent	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Fluore	ene	X	X	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

Creation Date 09-Feb-2016 **Revision Date** 18-Jan-2018

Print Date

18-Jan-2018

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Creation Date 08-Nov-2010 Revision Date 16-Jan-2019 Revision Number 6

1. Identification

Product Name Fluoranthene

Cat No.: AC119170000; AC119170250; AC119171000; AC119175000

CAS-No 206-44-0

Synonyms Benzo[j,k]fluorene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Acute oral toxicity Category 4

Label Elements

Signal Word

Warning

Hazard Statements

Harmful if swallowed



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

Rinse mouth

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Fluoranthene	206-44-0	>95

4. First-aid measures

General Advice If symptoms persist, call a physician.

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists,

call a physician.

Inhalation Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if

symptoms occur.

Ingestion Clean mouth with water and drink afterwards plenty of water. Get medical attention if

symptoms occur.

Most important symptoms and

effects

None reasonably foreseeable.

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Water spray, carbon dioxide (CO2), dry chemical, alcohol-resistant foam.

Unsuitable Extinguishing Media No information available

Flash Point Not applicable

Method - No information available

Autoignition Temperature

Explosion Limits

No information available

Revision Date 16-Jan-2019 **Fluoranthene**

Upper No data available No data available Lower Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO₂).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health **Flammability** Instability Physical hazards 2 0 0 N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment as required. Avoid dust

formation.

Should not be released into the environment. **Environmental Precautions**

Methods for Containment and Clean Sweep up and shovel into suitable containers for disposal. Keep in suitable, closed Up

containers for disposal.

Handling and storage

Ensure adequate ventilation. Wear personal protective equipment/face protection. Avoid Handling

dust formation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation.

Keep in a dry, cool and well-ventilated place. Refer product specification and/or product Storage

label for specific storage temperature requirement. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines

This product does not contain any hazardous materials with occupational exposure

limitsestablished by the region specific regulatory bodies.

Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations **Engineering Measures**

and safety showers are close to the workstation location.

Personal Protective Equipment

Wear appropriate protective eveglasses or chemical safety goggles as described by **Eye/face Protection**

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Wear appropriate protective gloves and clothing to prevent skin exposure. Skin and body protection

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard Respiratory Protection

> EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

9. Physical and chemical properties

Revision Date 16-Jan-2019 **Fluoranthene**

Physical State Powder Solid **Appearance** Liaht areen Odorless Odor

Odor Threshold No information available

Not applicable

109 - 111 °C / 228.2 - 231.8 °F 384 °C / 723.2 °F **Melting Point/Range**

Boiling Point/Range Flash Point Not applicable

Evaporation Rate No information available Flammability (solid,gas) No information available

Flammability or explosive limits

No data available Upper Lower No data available **Vapor Pressure** No information available **Vapor Density** No information available **Specific Gravity** No information available

Solubility insoluble

Partition coefficient; n-octanol/water No data available

Autoignition Temperature No information available **Decomposition Temperature** No information available **Viscosity** No information available

C16 H10 Molecular Formula **Molecular Weight** 202.25

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stable under normal conditions. Stability

Incompatible products. **Conditions to Avoid Incompatible Materials** Strong oxidizing agents

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous Polymerization Hazardous polymerization does not occur.

None under normal processing. **Hazardous Reactions**

11. Toxicological information

Acute Toxicity

Product Information No acute toxicity information is available for this product

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Fluoranthene	LD50 = 2 g/kg (Rat)	LD50 = 3180 mg/kg (Rabbit)	Not listed

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

No information available Irritation Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Fluoranthene	206-44-0	Not listed				

Revision Date 16-Jan-2019 **Fluoranthene**

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

No information available. **Teratogenicity**

STOT - single exposure None known STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and No information available

delayed

No information available **Endocrine Disruptor Information**

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for

complete information.

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Fluoranthene	Not listed	Oncorhynchus mykiss:	Not listed	EC50: 0.78 mg/L 20h
		LC50=0.0077 ma/L 96h		_

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility

Component	log Pow
Fluoranthene	5.1

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Fluoranthene - 206-44-0	U120	-

14. Transport information

DOT

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Technical Name Fluoranthene

Hazard Class 9 Ш **Packing Group**

TDG

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class Ш **Packing Group**

IATA

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

IMDG/IMO

UN-No UN3077

Proper Shipping Name Environmentally hazardous substances, solid, n.o.s.

Hazard Class 9
Packing Group III

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Fluoranthene	206-44-0	X	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed '-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Fluoranthene	206-44-0	-	Х	205-912-4	-	Х	Х	Х	-

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Fluoranthene	206-44-0	>95	1.0 0.1

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Fluoranthene	-	-	X	X

Clean Air Act Not applicable

OSHA - Occupational Safety and

Not applicable

Health Administration

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability

Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Fluoranthene	100 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

CERCLA

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island

Fluoranthene	X	X	X	=	=

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 08-Nov-2010

 Revision Date
 16-Jan-2019

 Print Date
 16-Jan-2019

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

SAFETY DATA SHEET

SECTION 1 - CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

1.1 - Product Identifiers

Catalog Name: H-157N

Description: Indeno(1,2,3-cd)pyrene

CAS No.: 193-39-5

1.2 - Relevant Identified Uses of the Substance or Mixture

Laboratory Chemical Reference Material

1.3 - Supplier Details

Company: AccuStandard, Inc.

125 Market St.

New Haven, CT 06513 USA

Telephone Number: 203-786-5290

Fax: 203-786-5287

Email: edocs@accustandard.com

1.4 - Emergency Telephone Number

Emergency Phone #: AccuStandard, Inc.

1-203-786-5290

Hours: Monday to Friday 8:00am to 5:00pm EST


SECTION 2 - HAZARDS IDENTIFICATION

2.1 - GHS Label Elements











Signal Word: Danger

Hazard Codes:

H302 - Harmful if swallowed. (Acute toxicity, oral, category 4)

H332 - Harmful if inhaled. (Acute toxicity, inhalation, category 4)

H335 - May be irritating to mucous membrane and upper respiratory system. (Specific target organ toxicity, single exposure; Respiratory tract irritation, category 3)

H350 - This product is or contains a component that is classified (ACGIH, IARC, NTP, OSHA) as a possible cancer hazard. (Carcinogenicity, category 1B)

Precautionary Codes:

P202 - This product should only by used by persons trained in the safe handling of hazardous chemicals.

P235 - Store in a cool dry place.

P260 - Do not breathe dust.

P262 - Do not get in eyes, on skin or clothing.

SDS Date: 11/10/2016 Page 1 of 6

SECTION 2 - HAZARDS IDENTIFICATION - continued

2.1 - GHS Label Elements - continued

P264 - Wash thoroughly after handling. Do not take internally. Eye wash and safety equipment should be readily available.

P284 - Respiratory Protection: If workplace exposure limit(s) of product or any component is exceeded (see TLV/PEL), or a risk assessment shows air-purifying respirators are appropriate, use of a NIOSH/MSHA approved air supplied respirator is advised. Use a full-face respirator with multi-purpose combination (US) or type ABEK (EN14387) respirator cartridges in absence of proper environmental control. Always use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU). Engineering and/or administrative controls should be implemented to reduce exposure.

P310 - Ingestion: Call a physician or poison control center immediately. If conscious, give water freely.

P338 - Eye contact: Immediately flush with plenty of water. After initial flushing, remove and contact lenses and continue flushing for at least 15 minutes. Assure adequate flushing by separating the eyelids with fingers.

P360 - Skin contact: Immediately wash skin with soap and plenty of water. Remove contaminated clothing. Get medical attention if symptoms occur. Wash clothing before reuse.

P404 - Store in a tightly closed container.

2.2 - Other Hazards

2.2.1 - Symptom of Exposure Health/Environment

Harmful.

Environmental hazard.

2.2.2 - Potential Health Effects

May be irritating to eyes.

May be irritating to skin.

May be harmful if absorbed through the skin. (Acute toxicity, dermal, category 5)

May be irritating to mucous membrane and upper respiratory system. (Specific target organ toxicity, single exposure; Respiratory tract irritation, category 3)

Harmful if inhaled. (Acute toxicity, inhalation, category 4)

Harmful if swallowed. (Acute toxicity, oral, category 4)

2.2.3 - Routes of Entry

Inhalation, ingestion or skin contact.

2.2.4 - Carcinogenicity

California Proposition 65 cancer hazard.

This product is or contains a component that is classified (ACGIH, IARC, NTP, OSHA) as a possible cancer hazard. (Carcinogenicity, category 1B)

SECTION 3 - COMPOSITION / ANALYTES DATA

Description: Indeno(1,2,3-cd)pyrene

Synonyms: o-Phenylenepyrene; IP; 2,3-Phenylenepyrene

Molecular Weight: 276.34 Molecular Formula: C22H12

EC#: 205-893-2

			ACGIH -TLV (mg/m³)		OSHA -PEL (mg/m³)		g/m³)	
Analyte	CAS Number	% Concentration	TWA	STEL	Skin	TWA	STEL	Skin
Indeno(1,2,3-cd)pyrene	193-39-5	100.000						

SDS Date: 11/10/2016 Page 2 of 6

SECTION 4 - FIRST AID MEASURES

4.1 - First Aid Procedures - General

Get medical assistance for all cases of overexposure.

4.2 - Eye Contact

Eye contact: Immediately flush with plenty of water. After initial flushing, remove and contact lenses and continue flushing for at least 15 minutes. Assure adequate flushing by separating the eyelids with fingers. (P338)

4.3 - Skin Contact

Skin contact: Immediately wash skin with soap and plenty of water. Remove contaminated clothing. Get medical attention if symptoms occur. Wash clothing before reuse. (P360)

4.4 - Inhalation

Inhalation: Remove to fresh air. If not breathing, give artificial respiration or give oxygen by trained personnel. Seek immediate medical attention.

4.5 - Ingestion

Ingestion: Call a physician or poison control center immediately. If conscious, give water freely. (P310)

SECTION 5 - FIRE FIGHTING MEASURES

5.1 - Flammable Properties

During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion.

5.2 - Extinguishing Media

Use alcohol foam, carbon dioxide, dry chemical, or water spray when fighting fires involving this material.

5.3 - Protection of Firefighters

As in any fire, wear self-contained breathing apparatus pressure demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

6.1 - Spill Response

Wear a self-contained breathing apparatus and appropriate Personal protection. Prevent contact with skin or eyes. Ventilate area. Avoid raising dust. Take up and containerize for proper disposal. Flush spill area with water. Comply with Federal, State, and local regulations.

SECTION 7 - HANDLING AND STORAGE

Store in a tightly closed container. (P404)

Store in a cool dry place. (P235)

Use with adequate ventilation.

Do not breathe dust. (P260)

Do not get in eyes, on skin or clothing. (P262)

Avoid prolonged or repeated exposure.

This product should only by used by persons trained in the safe handling of hazardous chemicals. (P202)

SECTION 8 - EXPOSURE CONTROLS

8.1 - Engineering Controls/PPE

Wash thoroughly after handling. Do not take internally. Eye wash and safety equipment should be readily available. (P264)

SDS Date: 11/10/2016 Page 3 of 6

SECTION 8 - EXPOSURE CONTROLS - continued

8.2 - General Hygene Considerations

Respiratory Protection: If workplace exposure limit(s) of product or any component is exceeded (see TLV/PEL), or a risk assessment shows air-purifying respirators are appropriate, use of a NIOSH/MSHA approved air supplied respirator is advised. Use a full-face respirator with multi-purpose combination (US) or type ABEK (EN14387) respirator cartridges in absence of proper environmental control. Always use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU). Engineering and/or administrative controls should be implemented to reduce exposure.

Material should be handled or transferred in an approved fume hood or with adequate ventilation.

Compatible chemical-resistant protective gloves must be worn to prevent skin contact. Inspect gloves prior to use. Use proper glove removal technique to avoid contact with product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash hands thoroughly and dry.

Use eye protection tested and approved under the appropriate government standards such as NIOSH (US) or EN 166 (EU).

All recommendations are advisory only and must be evaluated by an industrial hygienist and/or safety officer familiar with the specific situation of anticipated use, such as concentration and amount of the substance in the workplace. Any recommendation should not be construed as offering an approval for any specific use of the product.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

Appearance: Solid

Odor: N/A

Odor Threshold: N/A

pH: N/A

Melting Point: 150 - 153 °C Boiling Point: 497 - 498 °C Flash Point: 477 °F / 247 °C

Evaporation Rate (Butyl Acetate=1): N/A

Flammability Class: N/A

Lower Flammability Level: N/A Upper Flammability Level: N/A

Vapor Pressure: N/A

Vapor Density (Air = 1): N/A Specific Gravity: 1.38 g/cm3 Solubility in Water: Insoluble

Partition Coefficient: log Pow: 6.58 Autoignition Temperature: N/A Decomposition Temperature: N/A

Viscosity: N/A
VOC Content: N/A
Percent Volatile: N/A

SECTION 10 - STABILITY AND REACTIVITY

Stability: Stable

Materials to Avoid: Oxidizers

Hazardous Decomposition: Oxides of carbon

SDS Date: 11/10/2016 Page 4 of 6

SECTION 10 - STABILITY AND REACTIVITY - continued

Hazardous Polymerization: Will not occur Condition to Avoid: Excessive heat

SECTION 11 - TOXICOLOGICAL INFORMATION

Human Health Toxicity

See section 2 for specific toxicological information for the ingredients of this product.

LD50 (Oral): N/A LD50 (Dermal): N/A LC50 (Inhalation): N/A

As a class of compounds, PAHs are considered to be harmful to human health.

WARNING: This product contains chemical(s) known to the state of California to cause cancer. No other information related to the toxicological properties of this product is available at this time.

SECTION 12 - ECOLOGICAL INFORMATION

Environmental Toxicity

By complying with sections 6 and 7 there should be no release to the environment.

LC50 (Fish): N/A

EC50 (Aquatic Invertebrate): N/A

BCF: N/A

As a class of compounds, PAHs are considered to be harmful to the environment.

No other information related to the ecological properties of this product is available at this time.

SECTION 13 - DISPOSAL CONSIDERATIONS

Recycle or incinerate at any EPA approved facility or dispose in compliance with Federal, State and local regulations. Empty containers must be triple-rinsed prior to disposal.

SECTION 14 - TRANSPORT INFORMATION

Transportation Information (DOT/IATA)

UN Number: NR Class: NR

Packing Group: NR

Proper Shipping Name: Not Regulated for Transport

Poison by Inhalation: No Marine Pollutant: No

SECTION 15 - REGULATORY INFORMATION

WARNING: This product contains chemical(s) known to the state of California to cause cancer.

This product is subject to SARA section 313 reporting requirements.

The CAS number of this product is listed on the TSCA Inventory.

For laboratory, research and development use only. Not for manufacturing or commercial purposes.

In addition to federal and state regulations, local regulations may apply. Check with your local regulatory authorities.

SDS Date: 11/10/2016 Page 5 of 6

SECTION 16 - OTHER INFORMATION

This document has been designed to meet the requirements of OSHA, ANSI, GHS and CHIPs regulations. Chemicals are classified using the Globally Harmonized System for Classification and Labeling of Chemicals.

The statements contained herein are offered for informational purposes only and are based on technical data that we believe to be accurate. The manufacturer will not assume any liability for the accuracy and completeness of this information. Final determination of the suitability of the material is the responsibility of the user. Although certain hazards are described herein, the user should not presume that these are the only hazards that exist. Since conditions and manner of use are outside of the manufacturers control, we make

NO WARRANTY OF MERCHANTABILITY, EXPRESSED OR IMPLIED, AND ASSUME NO LIABILITY RESULTING FROM ITS USE.

Legend: N/A = Not Available ND = Not Determined NR = Not Regulated

Alteration of any information contained herein without written permission from the manufacturer is strictly prohibited.

HMIS/NFPA HAZARD INDEX

- 0 Minimal
- 1 Slight
- 2 Moderate
- 3 Serious
- 4 Severe
- * Additional Hazard

GHS HAZARD INDEX

Category 1 - Most Severe Category 5 - Least Severe

**** End of Document ****

SDS Date: 11/10/2016 Page 6 of 6



SDS #: 432

Revision Date: January 26, 2016

Safety Data Sheet (SDS)

SECTION 1 — CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Signal Word DANGER

Lead

Flinn Scientific, Inc. P.O. Box 219, Batavia, IL 60510 (800) 452-1261

Chemtrec Emergency Phone Number: (800) 424-9908

Pictograms

SECTION 2 — HAZARDS IDENTIFICATION

Hazard class: Acute toxicity, oral and inhalation (Category 4). Harmful if swallowed or inhaled (H302+H332). Do not eat, drink or smoke when using this product (P270). Avoid breathing dust and fumes (P261).



Hazard class: Carcinogenicity (Category 2). Suspected of causing cancer (H351). Obtain special instructions before use (P201). Do not handle until all safety precautions have been read and understood (P202). Use personal protective equipment as required (P281). Elemental lead is a possible human carcinogen (IARC-2B).



Hazard class: Reproductive toxicity (Category 1A). May damage fertility or the unborn child (H360).

Hazard class: Specific target organ toxicity, repeated exposure (Category 2). May cause damage to organs through prolonged or repeated exposure (H373). Do not eat, drink or smoke when using this product (P270).

SECTION 3 — COMPOSITION, INFORMATION ON INGREDIENTS

Component Name	CAS Number	Formula	Formula Weight	Concentration
Lead Forms: foil, sheets, shot, strips, and wire.	7439-92-1	Pb	207.19	

SECTION 4 — FIRST AID MEASURES

If exposed or concerned: Get medical advice or attention (P308+P313).

If inhaled: Remove victim to fresh air and keep at rest in a position comfortable for breathing (P304+P340).

If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing.

If on skin: Wash with plenty of water.

If swallowed: Rinse mouth. Immediately call a POISON CENTER or physician (P301+P310+P330).

SECTION 5 — FIRE FIGHTING MEASURES

Finely divided lead dust is flammable.

NFPA Code

Molten metal may release toxic fumes of lead.

None established

In case of fire: Use a tri-class dry chemical fire extinguisher.

SECTION 6 — ACCIDENTAL RELEASE MEASURES

Sweep up, place in sealed bag or container and dispose. Ventilate area and wash spill site after material pickup is complete. See Sections 8 and 13 for further information.

SECTION 7 — HANDLING AND STORAGE

Flinn Suggested Chemical Storage Pattern: Inorganic #1. Store with metals and metal hydrides.

Use fume hood when handling powder form.

SECTION 8 — EXPOSURE CONTROLS, PERSONAL PROTECTION

Wear protective gloves, protective clothing, and eye protection. Wash hands thoroughly after handling. Use fume hood when handling powder form.

Exposure guidelines: PEL/TLV 0.05 mg/m³ (OSHA/ACGIH)

SECTION 9 — PHYSICAL AND CHEMICAL PROPERTIES

Heavy, ductile, gray solid. Odorless.

Soluble: Dilute nitric acid. Insoluble in water.

Lead wire also contains 1% antimony (CAS #7440-36
Specific gravity: 11.35

0)

SECTION 10 — STABILITY AND REACTIVITY

Avoid strong acids, ammonium nitrate, hydrogen peroxide, sodium azide, zirconium, sodium acetylide, and chlorine. Shelf life: Indefinite, if stored properly.

SECTION 11 — TOXICOLOGICAL INFORMATION

Acute effects: Convulsions, seizures, weakness, muscle ORL-Pigeon LDL₀: 160 mg/kg SKN-RBT LD₅₀: N.A.

cramps, methemoglobinemia. IHL-Human LCL₀: 10 ug/m³

Chronic effects: Anemia, reproductive hazard, possible Lead is an IARC Category 2B; Possibly carcinogenic to

arcinogen. humans. Lead is classified by NTP as Reasonably

Target organs: Nerves, brain, blood, kidneys,
Anticipated to be a Human Carcinogen

female/male reproductive system

SECTION 12 — ECOLOGICAL INFORMATION

Accumulates in soil and water. Bioaccumulates in animals. Very toxic to aquatic life with long lasting effects

SECTION 13 — DISPOSAL CONSIDERATIONS

Please review all federal, state and local regulations that may apply before proceeding.

Flinn Suggested Disposal Method #27d is one option.

SECTION 14 — TRANSPORT INFORMATION

Shipping name: Not regulated. Hazard class: N/A. UN number: N/A.

SECTION 15 — REGULATORY INFORMATION

TSCA-listed, EINECS-listed (231-100-4), RCRA code D008.

SECTION 16 — OTHER INFORMATION

This Safety Data Sheet (SDS) is for guidance and is based upon information and tests believed to be reliable. Flinn Scientific, Inc. makes no guarantee of the accuracy or completeness of the data and shall not be liable for any damages relating thereto. The data is offered solely for your consideration, investigation, and verification. The data should not be confused with local, state, federal or insurance mandates, regulations, or requirements and CONSTITUTE NO WARRANTY. Any use of this data and information must be determined by the science instructor to be in accordance with applicable local, state or federal laws and regulations. The conditions or methods of handling, storage, use and disposal of the product(s) described are beyond the control of Flinn Scientific, Inc. and may be beyond our knowledge. FOR THIS AND OTHER REASONS, WE DO NOT ASSUME RESPONSIBILITY AND EXPRESSLY DISCLAIM LIABILITY FOR LOSS, DAMAGE OR

EXPENSE ARISING OUT OF OR IN ANY WAY CONNECTED WITH THE HANDLING, STORAGE, USE OR DISPOSAL OF THIS PRODUCT(S).

N.A. = Not available, not all health aspects of this substance have been fully investigated.

N/A = Not applicable

Consult your copy of the Flinn Science Catalog/Reference Manual for additional information about laboratory chemicals.

Revision Date: January 26, 2016



SAFETY DATA SHEET

Creation Date 20-Aug-2014 Revision Date 17-Jan-2018 Revision Number 3

1. Identification

Product Name Mercury (Certified ACS)

Cat No.: M141-1LB; M141-6LB

Synonyms Colloidal mercury; Hydrargyrum; Metallic mercury

Recommended Use Laboratory chemicals.

Uses advised against

Not for food, drug, pesticide or biocidal product use

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Corrosive to metals

Acute Inhalation Toxicity - Vapors

Reproductive Toxicity

Specific target organ toxicity - (repeated exposure)

Category 1

Category 1

Category 1

Target Organs - Central nervous system (CNS), Kidney.

Label Elements

Signal Word

Danger

Hazard Statements

May be corrosive to metals

Fatal if inhaled

May damage the unborn child

Causes damage to organs through prolonged or repeated exposure



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Do not get in eyes, on skin, or on clothing

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Do not breathe dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Wear respiratory protection

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Immediately call a POISON CENTER or doctor/physician

Skin

Immediately call a POISON CENTER or doctor/physician

IF ON SKIN: Gently wash with plenty of soap and water

Remove/Take off immediately all contaminated clothing

Wash contaminated clothing before reuse

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

WARNING. Reproductive Harm - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Mercury	7439-97-6	100

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.

Immediate medical attention is required.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

clothes and shoes. Immediate medical attention is required.

Inhalation Move to fresh air. If breathing is difficult, give oxygen. Do not use mouth-to-mouth method if

victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Immediate

medical attention is required.

Ingestion Do not induce vomiting. Call a physician or Poison Control Center immediately.

Most important symptoms and

effects

No information available.

Notes to Physician Treat symptomatically

Fire-fighting measures

Substance is nonflammable; use agent most appropriate to extinguish surrounding fire. **Suitable Extinguishing Media**

Unsuitable Extinguishing Media No information available

Flash Point No information available Method -No information available

Autoignition Temperature

Explosion Limits

No information available

No data available Upper No data available Lower Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Very toxic. Non-combustible, substance itself does not burn but may decompose upon heating to produce corrosive and/or toxic fumes. Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Mercury oxide Highly toxic fumes

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Up

Health	Flammability	Instability	Physical hazards
4	0	0	N/A

6. Accidental release measures

Personal Precautions

Wear self-contained breathing apparatus and protective suit. Evacuate personnel to safe areas. Ensure adequate ventilation. Do not get in eyes, on skin, or on clothing. Should not be released into the environment. See Section 12 for additional ecological information.

Environmental Precautions

Methods for Containment and Clean Wear self-contained breathing apparatus and protective suit. Soak up with inert absorbent material. Keep in suitable, closed containers for disposal.

7. Handling and storage

Use only under a chemical fume hood. Wear personal protective equipment. Do not get in Handling

eyes, on skin, or on clothing. Do not breathe vapors or spray mist. Do not ingest.

Keep containers tightly closed in a dry, cool and well-ventilated place. Corrosives area. Storage

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Mercury	TWA: 0.025 mg/m ³	(Vacated) TWA: 0.05 mg/m ³	IDLH: 10 mg/m ³	TWA: 0.05 mg/m ³
	Skin	Ceiling: 0.1 mg/m ³	TWA: 0.05 mg/m ³	
		(Vacated) STEL: 0.03 mg/m ³	Ceiling: 0.1 mg/m ³	
		Skin		
		(Vacated) Ceiling: 0.1 mg/m ³		

Mercury (Certified ACS)

Revision Date 17-Jan-2018

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures Use only under a chemical fume hood. Ensure adequate ventilation, especially in confined

areas. Ensure that eyewash stations and safety showers are close to the workstation

location.

Personal Protective Equipment

Eye/face ProtectionWear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateLiquidAppearanceSilverOdorOdorless

Odor ThresholdNo information availablepHNo information availableMelting Point/Range-38.87 °C / -38 °FBoiling Point/Range356.72 °C / 674.1 °FFlash PointNo information availableEvaporation RateNo information available

Flammability (solid,gas)

No information available

Flammability or explosive limits

UpperNo data availableLowerNo data availableVapor Pressure0.002 mmHg @ 25 °C

Vapor Density 7.0

Specific Gravity
13.59 (H2O=1)
Solubility
Insoluble in water
Partition coefficient: n-octanol/water
No data available

Autoignition TemperatureNo information availableDecomposition TemperatureNo information availableViscosityNo information available

Molecular Formula Hg
Molecular Weight 200.59

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products. Excess heat.

Incompatible Materials Strong oxidizing agents, Ammonia, Metals, Halogens

Mercury (Certified ACS)

Revision Date 17-Jan-2018

Hazardous Decomposition Products Mercury oxide, Highly toxic fumes

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

Toxicological information

Acute Toxicity

Product Information

No acute toxicity information is available for this product

Component Information Toxicologically Synergistic

No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Mercury	7439-97-6	Not listed				

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects May cause harm to the unborn child.

Teratogenicity No information available.

STOT - single exposure

None known

STOT - repeated exposure Central nervous system (CNS) Kidney

Aspiration hazard No information available

Symptoms / effects,both acute and No information available

delayed

Endocrine Disruptor Information No information available

The toxicological properties have not been fully investigated. Other Adverse Effects

12. Ecological information

Ecotoxicity

This product contains the following substance(s) which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Mercury	Not listed	0.9 mg/L LC50 96h	Not listed	EC50: = 5.0 μg/L, 96h
•		0.18 mg/L LC50 96h		(water flea)
		0.16 mg/L LC50 96h		, ,
		0.5 mg/L LC50 96h		

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

No information available. Mobility

13. Disposal considerations

Revision Date 17-Jan-2018

Mercury (Certified ACS)

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Mercury - 7439-97-6	U151	-

14. Transport information

DOT

UN-No UN2809 Proper Shipping Name MERCURY

Hazard Class 8
Subsidiary Hazard Class 6.1
Packing Group III

<u>TDG</u>

UN-No UN2809
Proper Shipping Name MERCURY

Hazard Class 8
Subsidiary Hazard Class 6.1
Packing Group III

IATA

UN-No UN2809
Proper Shipping Name MERCURY

Hazard Class 8
Subsidiary Hazard Class 6.1
Packing Group III

IMDG/IMO

UN-No UN2809
Proper Shipping Name MERCURY

Hazard Class 8
Subsidiary Hazard Class 6.1
Packing Group III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Mercury	Х	Χ	-	231-106-7	-		Χ	-	Χ	Χ	Χ

Legend:

- X Listed
- E Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.
- F Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
- N Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
- P Indicates a commenced PMN substance
- R Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
- S Indicates a substance that is identified in a proposed or final Significant New Use Rule
- T Indicates a substance that is the subject of a Section 4 test rule under TSCA.
- XU Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).
- Y1 Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.
- Y2 Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b)

Component	TSCA 12(b)
Mercury	Section 5

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Mercury	7439-97-6	100	1.0

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Mercury	-	-	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Mercury	X		-

OSHA Occupational Safety and Health Administration Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Mercury	1 lb	-

California Proposition 65

This product contains the following proposition 65 chemicals

Compone	ent	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Mercury	/	7439-97-6	Developmental	-	Developmental

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Mercury	X	X	Χ	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

	16. Other information
D	Description Affects

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 20-Aug-2014

 Revision Date
 17-Jan-2018

 Print Date
 17-Jan-2018

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Mercury (Certified ACS)

Revision Date 17-Jan-2018

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Creation Date 26-Sep-2009 Revision Date 06-Feb-2020 Revision Number 5

1. Identification

Product Name m-Xylene

Cat No.: AC610470000; AC610471000

CAS-No 108-38-3

Synonyms 1,3-Dimethylbenzene

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids
Category 3
Acute dermal toxicity
Category 4
Acute Inhalation Toxicity - Vapors
Skin Corrosion/Irritation
Category 2
Serious Eye Damage/Eye Irritation
Category 2
Specific target organ toxicity (single exposure)
Category 3
Target Organs - Respiratory system.

Aspiration Toxicity Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Flammable liquid and vapor

m-Xylene Revision Date 06-Feb-2020

May be fatal if swallowed and enters airways Causes skin irritation Causes serious eye irritation Harmful in contact with skin or if inhaled May cause respiratory irritation



Precautionary Statements

Prevention

Wear protective gloves/protective clothing/eye protection/face protection

Avoid breathing dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Wash face, hands and any exposed skin thoroughly after handling

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Call a POISON CENTER or doctor/physician if you feel unwell

Skin

Call a POISON CENTER or doctor/physician if you feel unwell

If skin irritation occurs: Get medical advice/attention

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Wash contaminated clothing before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Do NOT induce vomiting

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep cool

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Harmful to aquatic life with long lasting effects

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
m-Xylene	108-38-3	>95

4. First-aid measures
11 11 31 414 11104341 03

m-Xylene Revision Date 06-Feb-2020

General Advice If symptoms persist, call a physician.

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists,

call a physician.

Inhalation Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if

symptoms occur. Risk of serious damage to the lungs (by aspiration).

Ingestion Clean mouth with water and drink afterwards plenty of water. Do NOT induce vomiting. Call

a physician or poison control center immediately. If vomiting occurs naturally, have victim

lean forward.

Most important symptoms and

effects

None reasonably foreseeable. Symptoms of overexposure may be headache, dizziness,

tiredness, nausea and vomiting

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Water spray, carbon dioxide (CO2), dry chemical, alcohol-resistant foam. Water mist may

be used to cool closed containers.

Unsuitable Extinguishing Media No information available

Flash Point 25 °C / 77 °F

Method - No information available

Autoignition Temperature 465 °C / 869 °F

Explosion Limits

Upper 7.0% **Lower** 1.1%

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Containers may explode when heated. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO₂).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

HealthFlammabilityInstabilityPhysical hazards330N/A

6. Accidental release measures

Personal Precautions Use personal protective equipment as required. Ensure adequate ventilation. Remove all

sources of ignition. Take precautionary measures against static discharges.

Environmental Precautions Do not flush into surface water or sanitary sewer system.

Methods for Containment and Clean Soak up with inert absorbent material. Keep in suitable, closed containers for disposal.

Up

Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Handling Wear personal protective equipment/face protection. Do not get in eyes, on skin, or on

clothing. Avoid ingestion and inhalation. Ensure adequate ventilation. Keep away from open

flames, hot surfaces and sources of ignition. Use only non-sparking tools. Take

precautionary measures against static discharges.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place. Flammables area.

Keep away from heat, sparks and flame.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
m-Xylene	TWA: 100 ppm		IDLH: 900 ppm	TWA: 100 ppm
	STEL: 150 ppm		TWA: 100 ppm	STEL: 150 ppm
			TWA: 435 mg/m ³	
			STEL: 150 ppm	
			STEL: 655 mg/m ³	

Legend

ACGIH - American Conference of Governmental Industrial Hygienists NIOSH IDLH: NIOSH - National Institute for Occupational Safety and Health

Engineering Measures Ensure that eyewash stations and safety showers are close to the workstation location.

Ensure adequate ventilation, especially in confined areas. Use explosion-proof

electrical/ventilating/lighting/equipment.

Personal Protective Equipment

Eve/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene MeasuresHandle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateLiquidAppearanceColorlessOdoraromatic

Odor Threshold

No information available

No information available

pH No information availated Melting Point/Range -48 °C / -54.4 °F

Boiling Point/Range 139 - 139 °C / 282.2 - 282.2 °F

Flash Point 25 °C / 77 °F

Evaporation Rate

Flammability (solid,gas) Not applicable

Flammability or explosive limits

Upper 7.0% **Lower** 1.1%

0.7

Vapor Pressure 8 mbar @ 20 °C

Vapor Density3.66Specific Gravity0.864

Solubility
Slightly soluble in water
Partition coefficient; n-octanol/water
Autoignition Temperature
Decomposition Temperature
Viscosity
Slightly soluble in water
No data available
465 °C / 869 °F
No information available
0.62 mPa.s at 20 °C

Molecular Formula C8 H10 Molecular Weight 106.17

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products. Excess heat. Keep away from open flames, hot surfaces and

sources of ignition.

Incompatible Materials Strong oxidizing agents, Strong acids

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous ReactionsNone under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
m-Xylene			LC50 = 5984 ppm (Rat) 6 h

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Irritating to eyes and skin Irritating to eyes, respiratory system and skin

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
m-Xylene	108-38-3	Not listed				

Mutagenic Effects No information available

Reproductive Effects

No information available.

Developmental Effects

No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system
STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects,both acute and Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

delayed

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

The product contains following substances which are hazardous for the environment. Contains a substance which is:. Toxic to aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
m-Xylene	EC50: = 4.9 mg/L, 72h static	LC50: = 12.9 mg/L, 96h	EC50 = 0.0084 mg/L 24 h	EC50: 2.81 - 5.0 mg/L, 48h
	(Pseudokirchneriella	semi-static (Poecilia	_	Static (Daphnia magna)
	subcapitata)	reticulata)		
		LC50: = 8.4 mg/L, 96h		
		semi-static (Oncorhynchus		
		mykiss)		
		LC50: 14.3 - 18 mg/L, 96h		
		flow-through (Pimephales		
		promelas)		
		·		

Persistence and Degradability Persistence is unlikely

Bioaccumulation/ AccumulationNo information available.

Mobility Will likely be mobile in the environment due to its volatility. Is not likely mobile in the

environment due its low water solubility.

Component	log Pow
m-Xylene	3.2

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN1307
Proper Shipping Name XYLENES
Hazard Class 3
Packing Group III

_TDG

UN-No UN1307
Proper Shipping Name XYLENES
Hazard Class 3
Packing Group III

IATA

UN-No UN1307
Proper Shipping Name XYLENES
Hazard Class 3
Packing Group III

IMDG/IMO

UN-No UN1307 Proper Shipping Name XYLENES Hazard Class 3

Packing Group

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
m-Xylene	108-38-3	Χ	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

Ш

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
m-Xylene	108-38-3	Х	-	203-576-3	X	X	Х	Χ	KE-35428

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %	
m-Xylene	108-38-3	>95	1.0	

SARA 311/312 Hazard Categories S

See section 2 for more information

CWA (Clean Water Act)

OVA (Olean Water Act)				
Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
m-Xylene	X	-	-	-

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
m-Xylene	X		-

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
m-Xvlene	1000 lb	-

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
m-Xylene	X	X	X	X	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N

DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 26-Sep-2009

 Revision Date
 06-Feb-2020

 Print Date
 06-Feb-2020

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



Material Name: NAPHTHALENE SDS ID: 00228306

Section 1 - PRODUCT AND COMPANY IDENTIFICATION

Material Name

NAPHTHALENE

Synonyms

NAPHTHALENE CRUDE 78 DEGREE; NAPHTHALENE INTERMEDIATE 79 DEGREE; NAPHTHALENE REFINED 80 DEGREE; COAL TAR NAPHTHALENE

Chemical Family

polynuclear aromatic hydrocarbons

Product Use

Intermediate process chemical.

Restrictions on Use

None known.

Details of the supplier of the safety data sheet

KOPPERS INC.

436 Seventh Avenue

Pittsburgh, PA 15219-1800

Mfg Contact: 412-227-2001 (SDS Requests: 866-852-5239)

CHEMTREC: 800-424-9300 (Outside USA: +1 703-527-3887)

Emergencies: (Medical in USA): 877-737-9047

Emergencies: (Medical Outside of USA): 651-632-9269

E-mail: naorgmsds@koppers.com

Section 2 - HAZARDS IDENTIFICATION

Classification in accordance with paragraph (d) of 29 CFR 1910.1200.

Flammable Liquids - Category 4

Acute Toxicity - Oral - Category 4

Acute Toxicity - Dermal - Category 4

Skin Corrosion/Irritation - Category 2

Serious Eye Damage/Eye Irritation - Category 2A

Skin Sensitization - Category 1A

Germ Cell Mutagenicity - Category 2

Carcinogenicity - Category 1B

Specific Target Organ Toxicity - Single Exposure - Category 1 (blood, eyes, respiratory system, Hematopoietic

System, Cardiovascular system, Central Nervous System, kidneys, liver)

Specific Target Organ Toxicity - Repeated Exposure - Category 1 (Hematopoietic System , Cardiovascular system ,

Central Nervous System , respiratory system , liver , kidneys , bone marrow)

Specific Target Organ Toxicity - Repeated Exposure - Category 2 (lungs, liver)

Hazardous to the Aquatic Environment - Acute - Category 1

Hazardous to the Aquatic Environment - Chronic - Category 1

GHS Label Elements

Symbol(s)



Material Name: NAPHTHALENE SDS ID: 00228306







Signal Word

Danger

Hazard Statement(s)

Combustible liquid.

Harmful if swallowed.

Harmful in contact with skin.

Causes skin irritation.

Causes serious eye irritation.

May cause an allergic skin reaction.

Suspected of causing genetic defects.

May cause cancer.

Causes damage to organs.

Causes damage to organs through prolonged or repeated exposure.

May cause damage to organs through prolonged or repeated exposure.

Very toxic to aquatic life with long lasting effects.

Precautionary Statement(s)

Prevention

Obtain special instructions before use.

Do not handle until all safety precautions have been read and understood.

Keep away from heat/sparks/open flame/hot surfaces - No smoking.

Wear protective gloves/protective clothing/eye protection/face protection.

Do not breathe dust/fume/gas/mist/vapors/spray.

Wash thoroughly after handling.

Contaminated work clothing must not be allowed out of the workplace.

Do not eat, drink or smoke when using this product.

Avoid release to the environment.

Wear protective gloves.

Response

In case of fire: Use appropriate media to extinguish.

Collect spillage.

If exposed: Call a POISON CENTER or doctor/physician.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing.

IF ON SKIN: Wash with plenty of soap and water.

If skin irritation or rash occurs: Get medical advice/attention.

Take off contaminated clothing and wash before reuse.

Rinse mouth.

Call a POISON CENTER or doctor if you feel unwell.

Specific treatment (see label).

Storage

Store in a well-ventilated place. Keep cool.

Store locked up.



Material Name: NAPHTHALENE SDS ID: 00228306

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

Other Hazards

Heated material may cause thermal burns.

Section 3 - COMPOSITION / INFORMATION ON INGREDIENTS

CAS	Component Name	Percent
91-20-3	Naphthalene	94.5-100
95-15-8	Benzo[b]thiophene	1.6-1.9
91-22-5	Quinoline	1.6-1.9
91-57-6	2-Methylnaphthalene	0.1-1.6
1319-77-3	Cresol	0.2-1.2
90-12-0	1-Methylnaphthalene	0.1-0.6
108-68-9	3,5-Xylenol	0.3-0.4
95-13-6	Indene	0.1-0.3

Section 4 - FIRST AID MEASURES

Inhalation

If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. If breathing is difficult, oxygen should be administered by qualified personnel. Get immediate medical attention.

Skin

Wash skin with soap and water or use a waterless handcleaner while removing contaminated clothing and shoes. For thermal burns, cool affected areas as quickly as possible by drenching or immersing in water until material solidifies. Get immediate medical attention.

Eyes

Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Then get immediate medical attention.

Ingestion

Not a likely route of exposure. If burns occur, treat as thermal burns. Do NOT induce vomiting. If a large amount is swallowed, get medical attention. Do not give anything by mouth to unconscious or convulsive person. If vomiting occurs, keep head lower than hips to help prevent aspiration. Rinse mouth.

Most Important Symptoms/Effects

Acute

Harmful if swallowed Harmful in contact with skin. Causes skin irritation. Causes serious eye irritation. May cause allergic skin reaction. Causes damage to organs.

Delaved

Suspected of causing genetic defects. May cause cancer. Causes damage to organs through prolonged or repeated exposure. May cause damage to organs through prolonged or repeated exposure.

Indication of any immediate medical attention and special treatment needed



Material Name: NAPHTHALENE SDS ID: 00228306

Treat symptomatically and supportively.

Section 5 - FIRE FIGHTING MEASURES

Extinguishing Media

Suitable Extinguishing Media

regular dry chemical, carbon dioxide, dry sand, earth, water spray, regular foam, Large fires: Use water spray, fog or regular foam.

Unsuitable Extinguishing Media

Do not use water jets.

Special Hazards Arising from the Chemical

Moderate fire hazard. Vapor/air mixtures are explosive above flash point. The vapor is heavier than air. Vapors or gases may ignite at distant ignition sources and flash back.

Hazardous Combustion Products

oxides of carbon

Fire Fighting Measures

Move container from fire area if it can be done without risk. Cool containers with water spray until well after the fire is out. Directly spraying water or foam onto hot burning product may cause frothing. For fires in cargo or storage area: Cool containers with water from unmanned hose holder or monitor nozzles until well after fire is out. Keep unnecessary people away, isolate hazard area and deny entry. Avoid inhalation of material or combustion byproducts. Stay upwind and keep out of low areas. Withdraw immediately in case of rising sound from venting safety device or any discoloration of tanks due to fire.

Special Protective Equipment and Precautions for Firefighters

Wear full protective fire fighting gear including self contained breathing apparatus (SCBA) for protection against possible exposure.

Section 6 - ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures

Avoid inhalation or contact. Provide adequate ventilation. Wear personal protective clothing and equipment, see Section 8. Avoid release to the environment. Collect spillage.

Methods and Materials for Containment and Cleaning Up

Eliminate all ignition sources if safe to do so. Do not touch or walk through spilled material. Stop leak if possible without personal risk. Small spills: Absorb with sand or other non-combustible material. Collect spilled material in appropriate container for disposal. Large spills: Dike for later disposal. Prevent entry into waterways, sewers, basements, or confined areas. In Canada, report releases to provincial authorities, municipal authorities, or both, as required. If this product is spilled or leaked into the environment, the CERCLA (40 CFR 302.4) reportable quantity is 100 pounds, and requires National Response Center notification.

Section 7 - HANDLING AND STORAGE

Precautions for Safe Handling

Keep away from flames and hot surfaces. No smoking. Do not breathe vapor or mist. Avoid breathing vapors of heated materials. Avoid contact with eyes, skin and clothing. Use only in well ventilated area. Wash exposed areas thoroughly with soap and water, or a waterless handcleaner, after skin contact and before eating, drinking, using tobacco products, or restrooms. Contaminated clothing should be removed and laundered before reuse. Wear protective gloves/clothing and eye/face protection. Do not eat, drink, or smoke when using this product. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood.

Conditions for Safe Storage, Including any Incompatibilities

Page 4 of 14 Issue date: 2020-03-31 Revision 3 Print date: 2020-04-01



Material Name: NAPHTHALENE SDS ID: 00228306

Store in a well-ventilated place. Keep cool.

Store locked up.

Store and handle in accordance with all current regulations and standards. Label all containers. Keep away from heat, sparks and naked flames. Store in a cool, dry place. Protect from physical damage. Keep separated from incompatible substances.

Incompatible Materials

oxidizing materials

Section 8 - EXPOSURE CONTROLS / PERSONAL PROTECTION

Component Exposure Limits

Naphthalene	91-20-3	
Naphthaiene	71-20-3	
ACGIH:	10 ppm TWA	
	Skin - potential significant contribution to overall exposure by the cutaneous route	
OSHA (US):	10 ppm TWA ; 50 mg/m3 TWA	
Mexico:	Skin - potential for cutaneous absorption	
2-Methylnaphthalene	91-57-6	
Mexico:	0.5 ppm TWA [VLE-PPT]	
	Skin - potential for cutaneous absorption	
1-Methylnaphthalene	90-12-0	
Mexico:	0.5 ppm TWA [VLE-PPT]	
	Skin - potential for cutaneous absorption	
3,5-Xylenol	108-68-9	
ACGIH:	1 ppm TWA inhalable fraction and vapor	
Indene	95-13-6	
ACGIH:	5 ppm TWA	
NIOSH:	10 ppm TWA ; 45 mg/m3 TWA	

ACGIH - Threshold Limit Values - Biological Exposure Indices (BEI)

Naphthalene (91-20-3)

Time: end of shift Parameter: 1-Naphthol with hydrolysis plus 2-Naphthol with hydrolysis (nonquantitative, nonspecific)

Engineering Controls

Page 5 of 14 Issue date: 2020-03-31 Revision 3 Print date: 2020-04-01



Material Name: NAPHTHALENE SDS ID: 00228306

Ensure adequate ventilation. Ventilation equipment should be explosion-resistant if explosive concentrations of material are present. Ensure compliance with applicable exposure limits.

Individual Protection Measures, such as Personal Protective Equipment Eye/face protection

ANSI Z87.1-1989 approved safety glasses with side shields. Provide an emergency eye wash fountain and quick drench shower in the immediate work area. For the molten form: A face shield is recommended.

Skin Protection

Wear protective clothing to prevent contact. Contaminated clothing should be removed and laundered before reuse. In the molten form: Wear appropriate heat resistant clothing.

Respiratory Protection

If the applicable TLVs and/or PELs are exceeded, use canister or cartridge respirators, which are MSHA/NIOSH-approved, with organic vapor cartridges and high-efficiency particulate filters.

Glove Recommendations

Wear appropriate gloves. In the molten form: Wear appropriate heat resistant gloves.

Protective Materials

chemical resistant material, heat resistant material

Section 9 - PHYSICAL AND CHEMICAL PROPERTIES

Appearance	forms crystals during cooling	Physical State	liquid
Odor	mothball odor	Color	Not available
Odor Threshold	0.003 ppm	рН	Not available
Melting Point	77 - 80 °C	Boiling Point	218 °C
Boiling Point Range	Not available	Freezing point	Not available
Evaporation Rate	<1 (Ether = 1)	Flammability (solid, gas)	Not applicable
Autoignition Temperature	526 °C	Flash Point	>80 °C
Lower Explosive Limit	0.9 % (by volume)	Decomposition temperature	Not available
Upper Explosive Limit	5.9 % (by volume)	Vapor Pressure	0.187 mmHg @ 20 °C
Vapor Density (air=1)	4.42	Specific Gravity (water=1)	1.028 at 4 °C
Water Solubility	0.003 wt%	Partition coefficient: n-octanol/water	Not available



Material Name: NAPHTHALENE SDS ID: 00228306

Viscosity	Not available	Kinematic viscosity	Not available	
Solubility (Other)	Not available	Density	1.162 g/cc at 4 °C	
Log KOW	3.7 at 25 °C	Physical Form	liquid when loaded, solid at room temperature, changes from solid to liquid as temperature increases	
Volatility by Volume	>99 %	Molecular Weight	Not available	

Other Information

No additional information is available.

Section 10 - STABILITY AND REACTIVITY

Reactivity

No reactivity hazard is expected.

Chemical Stability

Stable at normal temperatures and pressure.

Possibility of Hazardous Reactions

Will not polymerize.

Conditions to Avoid

Avoid heat, flames, sparks and other sources of ignition.

Incompatible Materials

oxidizing materials

Hazardous decomposition products

oxides of carbon

Section 11 - TOXICOLOGICAL INFORMATION

Information on Likely Routes of Exposure

Inhalation

May be harmful if inhaled.

Skin Contact

Harmful in contact with skin. Causes skin irritation. May cause allergic skin reaction.

Eye Contact

Causes serious eye irritation.

Ingestion

Harmful if swallowed.

Acute and Chronic Toxicity

Component Analysis - LD50/LC50

The components of this material have been reviewed in various sources and the following selected endpoints are published:

Naphthalene (91-20-3)

Oral LD50 Rat 1110 mg/kg

Dermal LD50 Rabbit 1120 mg/kg

Inhalation LC50 Rat >340 mg/m3 1 h

Quinoline (91-22-5)

Oral LD50 Rat 331 mg/kg



Material Name: NAPHTHALENE SDS ID: 00228306

Dermal LD50 Rabbit 540 µL/kg

3,5-Xylenol (108-68-9)

Oral LD50 Rat 608 mg/kg

Dermal LD50 Rabbit 2000 mg/kg

Product Toxicity Data

4	Acute Toxicity Estimat		
	Dermal	1110 mg/kg	

Dermal	1110 mg/kg
Oral	1013 mg/kg

Immediate Effects

Harmful if swallowed. Harmful in contact with skin. Causes skin irritation. Causes serious eye irritation. May cause allergic skin reaction. Causes damage to organs.

Delayed Effects

Suspected of causing genetic defects. May cause cancer. Causes damage to organs through prolonged or repeated exposure. May cause damage to organs through prolonged or repeated exposure.

Irritation/Corrosivity Data

Causes skin irritation. Causes serious eye irritation.

Respiratory Sensitization

No data available.

Dermal Sensitization

May cause allergic skin reaction.

Component Carcinogenicity

Naphthalene	91-20-3
ACGIH:	A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans
IARC:	Monograph 82 [2002] (Group 2B (possibly carcinogenic to humans))
NTP:	Reasonably Anticipated To Be A Human Carcinogen
Quinoline	91-22-5
IARC:	Monograph 121 [in preparation] (Group 2B (possibly carcinogenic to humans))
OSHA:	Present
3,5-Xylenol	108-68-9
ACGIH:	A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans

May cause cancer.

Germ Cell Mutagenicity

Suspected of causing genetic defects.

Tumorigenic Data

No data available

Reproductive Toxicity

No data available for the mixture.

Specific Target Organ Toxicity - Single Exposure

Page 8 of 14 Issue date: 2020-03-31 Revision 3 Print date: 2020-04-01



Material Name: NAPHTHALENE SDS ID: 00228306

blood, eyes, respiratory system, hematopoietic system, cardiovascular system, central nervous system, kidneys, liver

Specific Target Organ Toxicity - Repeated Exposure

hematopoietic system, cardiovascular system, central nervous system, kidneys, liver, respiratory system, bone marrow, lungs.

Aspiration hazard

No data available.

Medical Conditions Aggravated by Exposure

respiratory disorders, skin disorders, eye disorders, blood system disorders

Section 12 - ECOLOGICAL INFORMATION

Ecotoxicity

Very toxic to aquatic life with long lasting effects.

Component Analysis - Aquatic Toxicity

Naphthalene	91-20-3	
Fish:	LC50 96 h Pimephales promelas 5.74 - 6.44 mg/L [flow-through]; LC50 96 h Oncorhynchus mykiss 1.6 mg/L [flow-through]; LC50 96 h Oncorhynchus mykiss 0.91 - 2.82 mg/L [static]; LC50 96 h Pimephales promelas 1.99 mg/L [static]; LC50 96 h Lepomis macrochirus 31.0265 mg/L [static]	
Invertebrate:	LC50 48 h Daphnia magna 2.16 mg/L IUCLID ; EC50 48 h Daphnia magna 1.96 mg/L [Flow through] EPA ; EC50 48 h Daphnia magna 1.09 - 3.4 mg/L [Static] EPA	
Quinoline	91-22-5	
Fish:	LC50 96 h Pimephales promelas 77.8 mg/L [flow-through]; LC50 96 h Pimephales promelas 46 mg/L [static]; LC50 96 h Poecilia reticulata 40 mg/L [static]	
Algae:	EC50 72 h Desmodesmus subspicatus 84 mg/L [static] EPA ; EC50 96 h Desmodesmus subspicatus 90 mg/L [static] EPA	
Invertebrate:	EC50 48 h Daphnia magna 28.5 mg/L IUCLID ; EC50 48 h Daphnia magna 45.9 - 57.3 mg/L [Static] EPA	

Algal Toxicity

Naphthalene: 0.4 mg/L 72 hours EC50 Skeletonema costatum.

Persistence and Degradability

Biodegradable.

Bioaccumulative Potential

This material is believed not to bioaccumulate due to low water solubility. BCF for fish is 168.

Mobility

The product has poor water-solubility.

Other Toxicity

No data available.

Section 13 - DISPOSAL CONSIDERATIONS

Disposai N	tetnoas		



Material Name: NAPHTHALENE SDS ID: 00228306

Dispose in accordance with all applicable regulations.

Component Waste Numbers

This product is classified as a Listed Hazardous Waste U165 as Naphthalene, upon disposal. This product may be classified as a Hazardous Waste for Toxicity Code D026 (Cresols) based on TCLP results.

Section 14 - TRANSPORT INFORMATION

US DOT Information:

Shipping Name: NAPHTHALENE, MOLTEN

Hazard Class: 4.1 UN/NA #: UN2304 Packing Group: III Required Label(s): 4.1 Marine pollutant

Further information: This material contains reportable quantity (RQ) Hazardous Substances. Applicable shipping

classification

IATA Information: Marine pollutant

Further information: Air shipment is prohibited.

TDG Information:

Shipping Name: NAPHTHALENE, MOLTEN

Hazard Class: 4.1 UN#: UN2304 Packing Group: III Required Label(s): 4.1 Marine pollutant

International Bulk Chemical Code

This material does not contain any chemicals required by the IBC Code to be identified as dangerous chemicals in bulk.

Further information

US DOT Reportable Quantities NAPHTHALENE (91-20-3) 100 lbs RQ; 45.4 kg RQ; STCC Code: 2814149 , HAZ STCC: 4917473 . ERG # 133

Section 15 - REGULATORY INFORMATION

U.S. Federal Regulations

This material contains one or more of the following chemicals required to be identified under SARA Section 302 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65), CERCLA (40 CFR 302.4), TSCA 12(b), and/or require an OSHA process safety plan.

Naphthalene	91-20-3	
SARA 313:	0.1 % de minimis concentration	
CERCLA:	100 lb final RQ ; 45.4 kg final RQ	



Material Name: NAPHTHALENE SDS ID: 00228306

Quinoline	91-22-5	
SARA 313:	1 % de minimis concentration	
CERCLA:	5000 lb final RQ; 2270 kg final RQ	

SARA Section 311/312 (40 CFR 370 Subparts B and C) reporting categories

Flammable; Carcinogenicity; Acute toxicity; Skin Corrosion/Irritation; Respiratory/Skin Sensitization; Serious Eye Damage/Eye Irritation; Specific Target Organ Toxicity; Germ Cell Mutagenicity

U.S. State Regulations

The following components appear on one or more of the following state hazardous substances lists:

Component	CAS	CA	MA	MN	NJ	PA
Naphthalene	91-20-3	Yes	Yes	Yes	Yes	Yes
Quinoline	91-22-5	Yes	Yes	Yes	Yes	Yes
Indene	95-13-6	Yes	Yes	Yes	Yes	Yes

California Safe Drinking Water and Toxic Enforcement Act (Proposition 65)



WARNING

This product can expose you to chemicals including Naphthalene, Quinoline, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Component Analysis - Inventory

Naphthalene (91-20-3)

US	CA	AU	CN	EU	JP - ENCS	JP - ISHL	KR KECI - Annex 1	KR KECI - Annex 2
Yes	DSL	Yes	Yes	EIN	Yes	Yes	Yes	No

KR - REACH CCA	MX	NZ	PH	TH-TECI	TW	VN (Draft)
No	Yes	Yes	Yes	Yes	Yes	Yes

Benzo[b]thiophene (95-15-8)

US	CA	AU	CN	EU	JP - ENCS	JP - ISHL	KR KECI - Annex 1	KR KECI - Annex 2
Yes	NSL	No	Yes	EIN	No	Yes	No	Yes

KR - REACH CCA	MX	NZ	PH	TH-TECI	TW	VN (Draft)
IN REFICIT COTT	17121	112	1 11	III ILCI	1 11	VIV (Diait)

Page 11 of 14 Issue date: 2020-03-31 Revision 3 Print date: 2020-04-01



Material Name: NAPHTHALENE SDS ID: 00228306

No

Quinoline (91-22-5)

US	CA	AU	CN	EU	JP - ENCS	JP - ISHL	KR KECI - Annex 1	KR KECI - Annex 2
Yes	DSL	Yes	Yes	EIN	Yes	Yes	Yes	No

KR - REACH CCA	MX	NZ	PH	TH-TECI	TW	VN (Draft)
Yes	Yes	Yes	Yes	No	Yes	Yes

2-Methylnaphthalene (91-57-6)

US	CA	AU	CN	EU	JP - ENCS	JP - ISHL	KR KECI - Annex 1	KR KECI - Annex 2	
Yes	DSL	Yes	Yes	EIN	Yes	Yes	Yes	No	

KR - REACH CCA	MX	NZ	PH	TH-TECI	TW	VN (Draft)
No	Yes	Yes	Yes	No	Yes	Yes

Cresol (1319-77-3)

US	CA	AU	CN	EU	JP - ENCS	JP - ISHL	KR KECI - Annex 1	KR KECI - Annex 2
Yes	DSL	Yes	Yes	EIN	Yes	Yes	Yes	No

KR - REACH CCA	MX	NZ	PH	TH-TECI	TW	VN (Draft)
Yes	Yes	Yes	Yes	No	Yes	Yes

1-Methylnaphthalene (90-12-0)

US	CA	AU	CN	EU	JP - ENCS	JP - ISHL	KR KECI - Annex 1	KR KECI - Annex 2
Yes	DSL	Yes	Yes	EIN	Yes	Yes	Yes	No

KR - REACH CCA	MX	NZ	PH	TH-TECI	TW	VN (Draft)
No	No	Yes	Yes	Yes	Yes	Yes

3,5-Xylenol (108-68-9)



Material Name: NAPHTHALENE SDS ID: 00228306

US	CA	AU	CN	EU	JP - ENCS	JP - ISHL	KR KECI - Annex 1	KR KECI - Annex 2
Yes	DSL	Yes	Yes	EIN	Yes	Yes	Yes	No

KR - REACH CCA	MX	NZ	PH	TH-TECI	TW	VN (Draft)
Yes	No	Yes	Yes	Yes	Yes	Yes

Indene (95-13-6)

US	CA	AU	CN	EU	JP - ENCS	JP - ISHL	KR KECI - Annex 1	KR KECI - Annex 2
Yes	DSL	Yes	Yes	EIN	Yes	Yes	Yes	No

KR - REACH CCA	MX	NZ	PH	TH-TECI	TW	VN (Draft)
No	Yes	Yes	Yes	No	Yes	Yes

U.S. Inventory (TSCA)

Listed on inventory.

Section 16 - OTHER INFORMATION

NFPA Ratings

Health: 2 Fire: 2 Instability: 0

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe

Summary of Changes

SECTION 2: Hazard identification. SECTION 3: Composition / information on ingredients. SECTION 4: First aid measures. SECTION 11: Toxicological information.

Preparation Date

7/19/2018

Revision date

1/3/2020

Key / Legend

ACGIH - American Conference of Governmental Industrial Hygienists; ADR - European Road Transport; AU - Australia; BOD - Biochemical Oxygen Demand; C - Celsius; CA - Canada; CA/MA/MN/NJ/PA - California/Massachusetts/Minnesota/New Jersey/Pennsylvania*; CAS - Chemical Abstracts Service; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CFR - Code of Federal Regulations (US); CLP - Classification, Labelling, and Packaging; CN - China; CPR - Controlled Products Regulations; DFG - Deutsche Forschungsgemeinschaft; DOT - Department of Transportation; DSD - Dangerous Substance Directive; DSL - Domestic Substances List; EC – European Commission; EEC - European Economic Community; EIN - European Inventory of (Existing Commercial Chemical Substances); EINECS - European Inventory of Existing Commercial Chemical Substances; ENCS - Japan Existing and New Chemical Substance Inventory; EPA - Environmental Protection Agency; EU - European Union; F - Fahrenheit; F - Background (for Venezuela Biological Exposure Indices); IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; ICAO - International Civil Aviation Organization; IDL - Ingredient Disclosure List; IDLH - Immediately Dangerous to Life and Health; IMDG - International Maritime Dangerous Goods; ISHL - Japan



Material Name: NAPHTHALENE SDS ID: 00228306

Industrial Safety and Health Law; IUCLID - International Uniform Chemical Information Database; JP - Japan; Kow - Octanol/water partition coefficient; KR KECI Annex 1 - Korea Existing Chemicals Inventory (KECI) / Korea Existing Chemicals List (KECL); KR KECI Annex 2 - Korea Existing Chemicals Inventory (KECI) / Korea Existing Chemicals List (KECL), KR - Korea; LD50/LC50 - Lethal Dose/ Lethal Concentration; KR REACH CCA - Korea Registration and Evaluation of Chemical Substances Chemical Control Act; LEL - Lower Explosive Limit; LLV - Level Limit Value; LOLI - List Of LIstsTM - ChemADVISOR's Regulatory Database; MAK - Maximum Concentration Value in the Workplace; MEL - Maximum Exposure Limits; MX - Mexico; Ne- Non-specific; NFPA - National Fire Protection Agency; NIOSH - National Institute for Occupational Safety and Health; NJTSR - New Jersey Trade Secret Registry; Nq - Non-quantitative; NSL - Non-Domestic Substance List (Canada); NTP -National Toxicology Program; NZ - New Zealand; OSHA - Occupational Safety and Health Administration; PEL-Permissible Exposure Limit; PH - Philippines; RCRA - Resource Conservation and Recovery Act; REACH-Registration, Evaluation, Authorisation, and restriction of Chemicals; RID - European Rail Transport; SARA -Superfund Amendments and Reauthorization Act; Sc - Semi-quantitative; STEL - Short-term Exposure Limit; TCCA - Korea Toxic Chemicals Control Act; TDG - Transportation of Dangerous Goods; TH-TECI - Thailand -FDA Existing Chemicals Inventory (TECI); TLV - Threshold Limit Value; TSCA - Toxic Substances Control Act; TW - Taiwan; TWA - Time Weighted Average; UEL - Upper Explosive Limit; UN/NA - United Nations /North American; US - United States; VLE - Exposure Limit Value (Mexico); VN (Draft) - Vietnam (Draft); WHMIS -Workplace Hazardous Materials Information System (Canada).

Other Information

Disclaimer:

The information set forth in this Safety Data Sheet does not purport to be all-inclusive and should be used only as a guide. While the information and recommendations set forth herein are believed to be accurate, the company makes no warranty regarding such information and recommendations and disclaims all liability from reliance thereon.

Page 14 of 14 Issue date: 2020-03-31 Revision 3 Print date: 2020-04-01



SAFETY DATA SHEET

Creation Date 15-Jun-2010 Revision Date 31-Jul-2019 **Revision Number** 7

1. Identification

Product Name o-Xylene

Cat No.: O5081-4; O5081-4LC; O5081-500; O5081FB-200; DO5081-500

CAS-No 95-47-6

1,2-Dimethylbenzene (Certified) **Synonyms**

Recommended Use Laboratory chemicals.

Food, drug, pesticide or biocidal product use Uses advised against

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA:

800-424-9300

CHEMTREC®, Outside the USA:

001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids Category 3 Category 4 Acute dermal toxicity Acute Inhalation Toxicity - Vapors Category 4 Skin Corrosion/irritation Category 2 Serious Eye Damage/Eye Irritation Category 2 Specific target organ toxicity (single exposure) Category 3 Target Organs - Respiratory system, Central nervous system (CNS).

Specific target organ toxicity - (repeated exposure) Category 2

Target Organs - Liver.

Aspiration Toxicity Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Flammable liquid and vapor May be fatal if swallowed and enters airways Harmful in contact with skin Causes skin irritation Causes serious eye irritation

Harmful if inhaled

May cause respiratory irritation May cause drowsiness or dizziness

May cause damage to organs through prolonged or repeated exposure



Precautionary Statements

Prevention

Wear protective gloves/protective clothing/eye protection/face protection

Use only outdoors or in a well-ventilated area

Wash face, hands and any exposed skin thoroughly after handling

Do not breathe dust/fume/gas/mist/vapors/spray

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Keep cool

Response

Get medical attention/advice if you feel unwell

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Call a POISON CENTER or doctor/physician if you feel unwell

Skin

Call a POISON CENTER or doctor/physician if you feel unwell

If skin irritation occurs: Get medical advice/attention

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Wash contaminated clothing before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Do NOT induce vomiting

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Harmful to aquatic life with long lasting effects

Revision Date 31-Jul-2019 o-Xylene

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
o-Xylene	95-47-6	>95

4. First-aid measures

If symptoms persist, call a physician. **General Advice**

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get **Eye Contact**

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists,

call a physician.

Inhalation Move to fresh air. If not breathing, give artificial respiration. Get medical attention if

symptoms occur. Risk of serious damage to the lungs.

Ingestion Clean mouth with water and drink afterwards plenty of water. Do not induce vomiting, Call a

physician or Poison Control Center immediately. If vomiting occurs naturally, have victim

lean forward.

Most important symptoms and

effects

Breathing difficulties. Symptoms of overexposure may be headache, dizziness, tiredness,

nausea and vomiting Treat symptomatically

Notes to Physician

Fire-fighting measures

Suitable Extinguishing Media Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide. Cool closed

containers exposed to fire with water spray.

Unsuitable Extinguishing Media Do not use a solid water stream as it may scatter and spread fire

31 °C / 87.8 °F **Flash Point**

Method -No information available

Autoignition Temperature 465 °C / 869 °F

Explosion Limits

6.7 vol % Upper Lower 0.9 vol %

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Containers may explode when heated. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO2)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Physical hazards Health **Flammability** Instability N/A 3 0

Revision Date 31-Jul-2019 o-Xylene

Accidental release measures

Personal Precautions

Use personal protective equipment. Ensure adequate ventilation. Remove all sources of

ignition. Take precautionary measures against static discharges.

Environmental Precautions

Should not be released into the environment. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage. Do not flush into surface

water or sanitary sewer system.

Up

Methods for Containment and Clean Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Avoid Handling

> ingestion and inhalation. Ensure adequate ventilation. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. Take precautionary

measures against static discharges.

Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat Storage

and sources of ignition. Flammables area.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
o-Xylene	TWA: 100 ppm		IDLH: 900 ppm	TWA: 100 ppm
	STEL: 150 ppm		TWA: 100 ppm	STEL: 150 ppm
			TWA: 435 mg/m ³	
			STEL: 150 ppm	
			STEL: 655 mg/m ³	

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures Ensure that eyewash stations and safety showers are close to the workstation location.

Ensure adequate ventilation, especially in confined areas. Use explosion-proof

electrical/ventilating/lighting/equipment.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Long sleeved clothing.

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard **Respiratory Protection**

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

Physical and chemical properties

Physical State Liquid Colorless **Appearance** aromatic Odor

No information available **Odor Threshold**

pH Not applicable
Melting Point/Range -25 °C / -13 °F

Boiling Point/Range 143 - 145 °C / 289.4 - 293 °F

Flash Point 31 °C / 87.8 °F

Evaporation Rate 0.7

Flammability (solid,gas) Not applicable

Flammability or explosive limits

 Upper
 6.7 vol %

 Lower
 0.9 vol %

 Vapor Pressure
 882 Pa @ 25 °C

Vapor Density 3.7 Specific Gravity 0.884

Solubility
Partition coefficient; n-octanol/water
Autoignition Temperature
Pecomposition Temperature
Viscosity

No information available
A65 °C / 869 °F
No information available
No information available

Molecular Formula C8 H10 Molecular Weight 106.17

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products. Excess heat. Keep away from open flames, hot surfaces and

sources of ignition.

Incompatible Materials Strong oxidizing agents, Strong acids

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO₂)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
o-Xylene	LD50 = 3608 mg/kg (Rat)	14100 mg/kg (Rabbit)	LC50 = 4330 ppm (Rat) 6 h

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

 Irritation
 Irritating to eyes and skin

 Sensitization
 No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
o-Xylene	95-47-6	Not listed				

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental EffectsNo information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system Central nervous system (CNS)

STOT - repeated exposure Live

Aspiration hazard Category 1

Symptoms / effects, both acute and Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

delayed

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Do not empty into drains. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
o-Xylene	EC50: = 4.2 mg/L, 192h	LC50: 16.1 mg/L/96h	EC50 = 0.0084 mg/L 24 h	EC50: 2.61 - 5.59 mg/L, 48h
-	(Pseudokirchneriella	(Lepomis macrochirus)	_	Flow through (Daphnia
	subcapitata)	LC50: 13 mg/L/24h		magna)
	EC50: = 4.7 mg/L, 72h static	(Carassius auratus)		EC50: 0.78 - 2.51 mg/L, 48h
	(Pseudokirchneriella			Static (Daphnia magna)
	subcapitata)			EC50: = 3.2 mg/L, 48h
				(Daphnia magna)

Persistence and Degradability Insoluble in water Persistence is unlikely based on information available.

Bioaccumulation/ Accumulation No information available.

Mobility Will likely be mobile in the environment due to its volatility.

Component	log Pow
o-Xylene	3.12

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN1307
Proper Shipping Name XYLENES
Hazard Class 3

Hazard Class 3 Packing Group III

TDG

UN-No UN1307
Proper Shipping Name XYLENES
Hazard Class 3
Packing Group III

<u>IATA</u>

UN-No UN1307
Proper Shipping Name Xylenes
Hazard Class 3

Packing Group

IMDG/IMO

UN-No UN1307
Proper Shipping Name Xylenes
Hazard Class 3
Packing Group III

Ш

15. Regulatory information

United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
o-Xylene	95-47-6	X	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

	Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
ı	o-Xylene	95-47-6	X	-	202-422-2	X	X	Х	X	KE-35429

U.S. Federal Regulations

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
o-Xylene	95-47-6	>95	1.0

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

0117	Tolcali Water Acty				
	Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
	o-Xylene	X	-	-	-

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
o-Xylene	X		-

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
o-Xylene	1000 lb	-

California Proposition 65

This product does not contain any Proposition 65 chemicals

U.S. State Right-to-Know

Regulations

Component Massachusetts New Jersey Pennsylvania Illinois Rhode Island

o-Xylene	Χ	X	X	X	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 15-Jun-2010

 Revision Date
 31-Jul-2019

 Print Date
 31-Jul-2019

Revision Summary SDS sections updated. 11. 16.

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET: PERCHLOROETHYLENE

IN CASE OF TRANSPORTATION EMERGENCY CONTACT:

CHEMTREC:(800) 424-9300

LL OTHER INCLUDIES

ALL OTHER INQUIRIES:

(770) 904-7042 // www.ciscochem.com 266 Rue Cezzan Lavonia, GA 30553





1. IDENTIFICATION

SUBSTANCE: TETRACHLOROETHYLENE

TRADE NAMES/SYNONYMS:

PERCHLOROETHYLENE; 1,1,2,2-TETRACHLOROETHYLENE; ETHYLENE TETRACHLORIDE; PERC;

TETRACHLORETHYLENE; PERCHLORETHYLENE; TETRACHLOROETHENE

CHEMICAL FAMILY: halogenated, aliphatic

2. HAZARDS IDENTIFICATION

NFPA RATINGS (SCALE 0-4): HEALTH=3 FIRE=0 REACTIVITY=0

EMERGENCY OVERVIEW:

COLOR: colorless

PHYSICAL FORM: volatile liquid ODOR: faint odor, sweet odor

MAJOR HEALTH HAZARDS: respiratory tract irritation, skin irritation, eye irritation, central nervous system depression, cancer

hazard (in humans)

POTENTIAL HEALTH EFFECTS:

INHALATION:

SHORT TERM EXPOSURE: irritation, nausea, vomiting, chest pain, difficulty breathing, irregular

heartbeat, headache, drowsiness, dizziness, disorientation, mood swings, loss of coordination, blurred vision,

lung congestion, kidney damage, liver damage

LONG TERM EXPOSURE: irritation, nausea, stomach pain, loss of appetite, headache, drowsiness, dizziness, disorientation, sleep disturbances, pain in extremities, loss of coordination, blurred vision, hormonal disorders, internal bleeding, heart damage, liver damage, birth defects, brain damage, tumors, cancer

SKIN CONTACT:

SHORT TERM EXPOSURE: irritation (possibly severe)

LONG TERM EXPOSURE: irritation

EYE CONTACT:

SHORT TERM EXPOSURE: irritation LONG TERM EXPOSURE: irritation

INGESTION:

SHORT TERM EXPOSURE: same as effects reported in short term inhalation LONG TERM EXPOSURE: same as effects reported in long term inhalation

3. COMPOSITION

COMPONENT: TETRACHLOROETHYLENE

CAS NUMBER: 127-18-4 PERCENTAGE: 100.0

SDS: PERCHLOROETHYLENE Page: 1



Hazardous: YES

4. FIRST AID MEASURES

Inhalation:

Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Call a physician.

Ingestion:

Aspiration hazard. If swallowed, DO NOT INDUCE VOMITING. Give large quantities of water. Never give anything by mouth to an unconscious person. Get medical attention immediately.

Skin Contact

Wash skin with soap or mild detergent and water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse. Call a physician.

Eye Contact:

Immediately flush eyes with plenty of water for at least 15 minutes, lifting lower and upper eyelids occasionally. Get medical attention immediately.

Note to Physician:

Do not administer adrenaline or epinephrine to a victim of chlorinated solvent poisoning.

5. FIRE FIGHTING MEASURES

FIRE AND EXPLOSION HAZARDS: Negligible fire hazard.

EXTINGUISHING MEDIA: carbon dioxide, regular dry chemical Large fires: Use regular foam or flood with fine water spray.

FIRE FIGHTING: Cool containers with water spray until well after the fire is out. Stay away from the ends of tanks. For tank, rail car or tank truck, evacuation radius: 800 meters (1/2 mile).

FLASH POINT: No data available.

Special Information:

In the event of a fire, wear full protective clothing and NIOSH-approved self-contained breathing apparatus with full facepiece operated in the pressure demand or other positive pressure mode

6. ACCIDENTAL RELEASE MEASURES

SOIL RELEASE:

Dig holding area such as lagoon, pond or pit for containment. Dike for later disposal. Absorb with sand or other non-combustible material.

WATER RELEASE:

Absorb with activated carbon. Remove trapped material with suction hoses. Subject to California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65). Keep out of water supplies and sewers.

OCCUPATIONAL RELEASE:

Avoid heat, flames, sparks and other sources of ignition. Stop leak if possible without personal risk. Small liquid spills: Absorb with sand or other non-combustible material. Large spills: Dike for later disposal. Remove sources of ignition. Keep unnecessary people away, isolate hazard area and deny entry. Notify Local Emergency Planning Committee and State Emergency Response Commission for release greater than or equal to RQ (U.S. SARA Section 304). If release occurs in the U.S. and is reportable under CERCLA Section 103, notify the National Response Center at (800)424-8802 (USA) or (202)426-2675 (USA).

7. HANDLING AND STORAGE

Store in a cool, dry, ventilated area away from sources of heat or ignition. Isolate from flammable materials. Protect from direct sunlight. Wear special protective equipment (Sec. 8) for maintenance break-in or where exposures may exceed established exposure levels. Wash hands, face, forearms and neck when exiting restricted areas. Shower, dispose of outer clothing, change to clean garments at the end of the day. Avoid cross-contamination of street clothes. Wash hands before eating and do not eat, drink, or

Page: 2



smoke in workplace. Containers of this material may be hazardous when empty since they retain product residues (vapors, liquid); observe all warnings and precautions listed for the product.

8. EXPOSURE CONTROLS AND PERSONAL PROECTION

Airborne Exposure Limits:

-OSHA Permissible Exposure Limit (PEL): 100 ppm (TWA), 200 ppm (ceiling),

300 ppm/5min/3-hour (max)

-ACGIH Threshold Limit Value (TLV):

25 ppm (TWA), 100 ppm (STEL); listed as A3, animal carcinogen

Ventilation System:

A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits. Local exhaust ventilation is generally preferred because it can control the emissions of the contaminant at its source, preventing dispersion of it into the general work area. Please refer to the ACGIH document, Industrial Ventilation, A Manual of Recommended Practices, most recent edition, for details.

Personal Respirators (NIOSH Approved):

If the exposure limit is exceeded, wear a supplied air, full-facepiece respirator, airlined hood, or full-facepiece self-contained breathing apparatus.

Skin Protection:

Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Eye Protection:

Use chemical safety goggles and/or full face shield where dusting or splashing of solutions is possible. Maintain eye wash fountain and quick-drench facilities in work area.

CLOTHING: Wear appropriate chemical resistant clothing. GLOVES: Wear appropriate chemical resistant gloves.

RESPIRATOR: The following respirators and maximum use concentrations are drawn from NIOSH and/or OSHA.

At any detectable concentration -

Any self-contained breathing apparatus that has a full facepiece and is operated in a pressure-demand or other positive-pressure mode.

Any supplied-air respirator with a full facepiece that is operated in a pressure-demand or other positive- pressure mode in combination with an auxiliary self-contained breathing apparatus operated in pressure- demand or other positive-pressure mode.

Escape -

Any air-purifying full-facepiece respirator (gas mask) with a chin-style, front-mounted or back-mounted organic vapor canister. Any appropriate escape-type, self-contained breathing apparatus.

For Unknown Concentrations or Immediately Dangerous to Life or Health -

Any supplied-air respirator with a full facepiece that is operated in a pressure-demand or other positive- pressure mode in combination with an auxiliary self-contained breathing apparatus operated in pressure- demand or other positive-pressure mode. Any self-contained breathing apparatus that has a full facepiece and is operated in a pressure-demand or other positive-pressure mode.

9. PHYSICAL AND CHEMICAL PROPERTIES

PHYSICAL STATE: liquid APPEARANCE: clear COLOR: colorless

PHYSICAL FORM: volatile liquid ODOR: faint odor, sweet odor MOLECULAR WEIGHT: 165.83 MOLECULAR FORMULA: C12-C-C-C12

BOILING POINT: 250 F (121 C) FREEZING POINT: -2 F (-19 C) VAPOR PRESSURE: 14 mmHg @ 20 C

SDS: PERCHLOROETHYLENE Page: 3



VAPOR DENSITY (air=1): 5.83

SPECIFIC GRAVITY (water=1): 1.6227

WATER SOLUBILITY: 0.015%

PH: Not available

VOLATILITY: Not available ODOR THRESHOLD: 50 ppm

EVAPORATION RATE: 2.8 (butyl acetate=1)

COEFFICIENT OF WATER/OIL DISTRIBUTION: Not available

SOLVENT SOLUBILITY:

Soluble: alcohol, ether, benzene, chloroform, oils

10. STABILITY AND REACTIVITY

Stability:

Stable under ordinary conditions of use and storage. Slowly decomposed by light. Deteriorates rapidly in warm, moist climates.

Hazardous Decomposition Products:

Carbon dioxide and carbon monoxide may form when heated to decomposition. Hydrogen chloride gas and phosgene gas may be formed upon heating. Decomposes with moisture to yield trichloroacetic acid and hydrochloric acid.

Hazardous Polymerization:

Will not occur.

Incompatibilities:

Strong acids, strong oxidizers, strong alkalis, especially NaOH, KOH; finely divided metals, especially zinc, barium, lithium. Slowly corrodes aluminum, iron and zinc.

Conditions to Avoid:

Moisture, light, heat and incompatibles.

11. TOXICOLOGICAL INFORMATION

TETRACHLOROETHYLENE:

IRRITATION DATA: 810 mg/24 hour(s) skin-rabbit severe; 500 mg/24 hour(s) skin-rabbit mild; 162 mg eyes-rabbit mild; 500 mg/24 hour(s) eyes-rabbit mild

TOXICITY DATA: 4100 ppm/6 hour(s) inhalation-rat LC50; >10000 mg/kg skin-rabbit LD50 (Dow); 2629 mg/kg oral-rat LD50

CARCINOGEN STATUS: NTP: Anticipated Human Carcinogen; IARC: Human Limited Evidence, Animal Sufficient Evidence, Group 2A; ACGIH: A3 -Confirmed Animal Carcinogen; EC: Category 2

LOCAL EFFECTS:

Irritant: inhalation, skin, eye

ACUTE TOXICITY LEVEL: Moderately Toxic: ingestion Slightly Toxic: inhalation

TARGET ORGANS: central nervous system

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: eye disorders, heart or cardiovascular disorders, kidney disorders, liver disorders, nervous system disorders, skin disorders and allergies

TUMORIGENIC DATA: Available.

MUTAGENIC DATA: Available.

REPRODUCTIVE EFFECTS DATA: Available.

ADDITIONAL DATA: May be excreted in breast milk. Alcohol may enhance the toxic effects. Stimulants such as epinephrine may induce ventricular fibrillation.



12. ECOLOGICAL INFORMATION

ECOTOXICITY DATA:

FISH TOXICITY: 8430 ug/L 96 hour(s) LC50 (Mortality) Flagfish (Jordanella floridae)

INVERTEBRATE TOXICITY: 7500 ug/L 48 hour(s) EC50 (Immobilization) Water flea (Daphnia magna)

ALGAL TOXICITY: 509000 ug/L 96 hour(s) EC50 (Photosynthesis) Diatom (Skeletonema costatum)

FATE AND TRANSPORT:

BIOCONCENTRATION: 49 ug/L 1-21 hour(s) BCF (Residue) Bluegill (Lepomis macrochirus) 3.43 ug/L

Environmental Fate:

When released into the soil, this material is expected to quickly evaporate. When released into the soil, this material may leach into groundwater. When released into the soil, this material may biodegrade to a moderate extent. When released to water, this material is expected to quickly evaporate. When released into water, this material is not expected to biodegrade. This material is not expected to significantly bioaccumulate. When released into the air, this material may be moderately degraded by reaction with photochemically produced hydroxyl radicals.

Environmental Toxicity:

The LC50/96-hour values for fish are between 1 and 10 mg/l. The LC50/96-hour values for fish are between 10 and 100 mg/l. This material is expected to be toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

Whatever cannot be saved for recovery or recycling should be handled as hazardous waste and sent to a RCRA approved incinerator or disposed in a RCRA approved waste facility. Processing, use or contamination of this product may change the waste management options. State and local disposal regulations may differ from federal disposal regulations. Dispose of container and unused contents in accordance with federal, state and local requirements.

14. TRANSPORT INFORMATION

Domestic (Land, D.O.T.)

Proper Shipping Name: TETRACHLOROETHYLENE Hazard Class: 6.1

UN/NA: UN1897 Packing Group: III

Information reported for product/size: 20L

International (Water, I.M.O.)

Proper Shipping Name: TETRACHLOROETHYLENE Hazard Class: 6.1

UN/NA: UN1897 Packing Group: III

Information reported for product/size: 20L

Proper shipping paperwork:

UN 1897, Tetrachoroethylene, 6.1, PG III

Marine Pollutant

15. REGULATORY INFORMATION

U.S. REGULATIONS:

CERCLA SECTIONS 102a/103 HAZARDOUS SUBSTANCES (40 CFR 302.4): TETRACHLOROETHYLENE

(PERCHLOROETHYLENE): 100 LBS RQ

SARA TITLE III SECTION 302 EXTREMELY HAZARDOUS SUBSTANCES



(40 CFR 355 Subpart B): Not regulated.

SARA TITLE III SECTION 304 EXTREMELY HAZARDOUS SUBSTANCES (40 CFR 355 Subpart C): Not regulated.

SARA TITLE III SARA SECTIONS 311/312 HAZARDOUS CATEGORIES (40 CFR 370 Subparts B and C):

ACUTE: Yes CHRONIC: Yes FIRE: No REACTIVE: No

SUDDEN RELEASE: No

SARA TITLE III SECTION 313 (40 CFR 372.65): TETRACHLOROETHYLENE (PERCHLOROETHYLENE)

OSHA PROCESS SAFETY (29 CFR 1910.119): Not regulated.

STATE REGULATIONS: California Proposition 65:

Known to the state of California to cause the following: TETRACHLOROETHYLENE (PERCHLOROETHYLENE) Cancer (Apr 01, 1988)

CANADIAN REGULATIONS: WHMIS CLASSIFICATION: D2

NATIONAL INVENTORY STATUS:

U.S. INVENTORY (TSCA): Listed on inventory.

TSCA 12(b) EXPORT NOTIFICATION: Not listed. CANADA INVENTORY (DSL/NDSL): Not determined.

16. OTHER INFORMATION

NFPA Ratings: Health: 2 Flammability: 0 Reactivity: 0

Label Hazard Warning:

WARNING! HARMFUL IF SWALLOWED, INHALED OR ABSORBED THROUGH SKIN. CAUSES IRRITATION TO SKIN, EYES AND RESPIRATORY TRACT. AFFECTS CENTRAL NERVOUS SYSTEM, LIVER AND KIDNEYS. SUSPECT CANCER HAZARD. MAY CAUSE CANCER. Risk of cancer depends on level and duration of exposure.

Label Precautions:

Do not get in eyes, on skin, or on clothing.

Do not breathe vapor or mist.

Keep container closed.

Use only with adequate ventilation.

Wash thoroughly after handling.

Label First Aid:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. If swallowed, DO NOT INDUCE VOMITING. Give large quantities of water. Never give anything by mouth to an unconscious person. In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse. In all cases call a physician.

Product Use:

Laboratory Reagent.

CISCO provides the information contained herein in good faith but makes no

representation as to its comprehensiveness or accuracy. This document is intended only as a guide to the appropriate precautionary handling of the material by a properly trained person using this product.

Individuals receiving the information must exercise their independent judgment in determining its appropriateness for a particular purpose. CISCO MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT TO WHICH THE INFORMATION REFERS.



ACCORDINGLY, CISCO WILL NOT BE RESPONSIBLE FOR DAMAGES RESULTING FROM USE OF OR RELIANCE UPON THIS INFORMATION.

Date Created: 5/18/2015 Date Updated: 6/11/2015



SAFETY DATA SHEET

Revision Date 10-Feb-2015 Revision Number 1

1. Identification

Product Name Pyrene, ca 96%

Cat No.: AC157651000; AC157655000

Synonyms Benzo[def]phenanthrene

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company Entity / Business Name

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane

Fair Lawn, NJ 07410 Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

For information US call: 001-800-ACROS-01

/ Europe call: +32 14 57 52 11

Emergency Number **US:**001-201-796-7100 /

Europe: +32 14 57 52 99

CHEMTREC Tel. No.US:001-800-424-9300 /

Europe:001-703-527-3887

2. Hazard(s) identification

Classification

Classification under 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Label Elements

None required

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Pyrene	129-00-0	96.0

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes.

Pyrene, ca 96% Revision Date 10-Feb-2015

Inhalation Move to fresh air.

Ingestion Do not induce vomiting.

Most important symptoms/effects
Notes to Physician

No information available.
Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media No information available

Flash Point °C

Method - No information available

Autoignition Temperature

Explosion Limits

No information available

Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

None known

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
1	1	0	N/A

Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment.

Environmental Precautions See Section 12 for additional ecological information. Avoid release to the environment.

Collect spillage.

Methods for Containment and Clean No information available.

Up

7. Handling and stor	rage
----------------------	------

Handling Ensure adequate ventilation.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure limits

established by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

Revision Date 10-Feb-2015 Pyrene, ca 96%

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Wear appropriate protective gloves and clothing to prevent skin exposure. Skin and body protection

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard **Respiratory Protection**

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

9. Physical and chemical properties

Physical State Powder Solid Yellow **Appearance** Odorless Odor

No information available **Odor Threshold**

pН

156 °C Melting Point/Range

°C @ 760 mmHg **Boiling Point/Range**

Flash Point °C

Evaporation Rate No information available Flammability (solid,gas) No information available

Flammability or explosive limits

Upper No data available Lower No data available < 1 mmHg @ 20 °C **Vapor Pressure Vapor Density** No information available **Relative Density** No information available Solubility No information available No data available

Partition coefficient; n-octanol/water

No information available **Autoignition Temperature Decomposition Temperature** No information available **Viscosity** No information available

Molecular Formula C16H10 **Molecular Weight** 202.25

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Incompatible products. **Conditions to Avoid**

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products None under normal use conditions

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Pyrene	2700 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic No information available

Revision Date 10-Feb-2015 Pyrene, ca 96%

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

No information available Irritation Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Pyrene	129-00-0	group 3	Not listed	Not listed	Not listed	Not listed

No information available **Mutagenic Effects**

Reproductive Effects No information available.

No information available. **Developmental Effects**

No information available. **Teratogenicity**

STOT - single exposure None known STOT - repeated exposure None known

No information available Aspiration hazard

Symptoms / effects,both acute and No information available

delayed

Endocrine Disruptor Information No information available

The toxicological properties have not been fully investigated. Other Adverse Effects

12. Ecological information

Ecotoxicity

Do not empty into drains.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Pyrene	Not listed	Oncorhynchus mykiss: LC50	Not listed	EC50 48h 1.8 mg/L
1		> 2mg/L 96h		FC50 48h 0.002-0.003 mg/L

Persistence and Degradability Bioaccumulation/ Accumulation No information available No information available.

Mobility No information available.

Component	log Pow
Pyrene	4.88

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

	14. Transport information				
DOT TDG IATA	Not regulated				
TDG	Not regulated				
<u>IATA</u>	Not regulated				
IMDG/IMO_	Not regulated				
15. Regulatory information					

International Inventories

Pyrene, ca 96% Revision Date 10-Feb-2015

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Pyrene	Х	Χ	-	204-927-3	-		Χ	Χ	Χ	Χ	-

Legend:

- X Listed
- E Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.
- F Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
- N Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
- P Indicates a commenced PMN substance
- R Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
- S Indicates a substance that is identified in a proposed or final Significant New Use Rule
- T Indicates a substance that is the subject of a Section 4 test rule under TSCA.
- XU Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).
- Y1 Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.
- Y2 Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazardous Categorization

Acute Health Hazard

Chronic Health Hazard

No
Fire Hazard

Sudden Release of Pressure Hazard

No
Reactive Hazard

No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Pyrene	-	-	X	X

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration

Not applicable

CERCLA

Not applicable

Component	Hazardous Substances RQs	CERCLA EHS RQs
Pyrene	5000 lb	5000 lb

California Proposition 65

This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Pyrene	X	X	X	X	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Pyrene, ca 96% Revision Date 10-Feb-2015

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class Non-controlled

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

Revision Date 10-Feb-2015 Print Date 10-Feb-2015

Revision SummaryThis document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



SAFETY DATA SHEET

Revision Date 19-Jan-2018 Revision Number 3

1. Identification

Product Name sec-Butylbenzene

Cat No.: AC107860000; AC107860050; AC107860500; AC107862500

CAS-No 135-98-8 Synonyms 2-Phenylbutane

Recommended Use Laboratory chemicals.

Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Acros Organics
One Reagent Lane One Reagent Lane
Fair Lawn, NJ 07410 Fair Lawn, NJ 07410

Tel: (201) 796-7100

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11 Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99 **CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids Category 3
Skin Corrosion/Irritation Category 2
Serious Eye Damage/Eye Irritation Category 2

Label Elements

Signal Word

Warning

Hazard Statements

Flammable liquid and vapor Causes skin irritation Causes serious eye irritation

Revision Date 19-Jan-2018 sec-Butylbenzene



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling Wear protective gloves/protective clothing/eye protection/face protection

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Skin

If skin irritation occurs: Get medical advice/attention

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Wash contaminated clothing before reuse

Eves

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store in a well-ventilated place. Keep cool

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

None identified

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
sec-Butvlbenzene	135-98-8	> 99

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

clothes and shoes. Get medical attention.

Inhalation Remove from exposure, lie down. Remove to fresh air. If breathing is difficult, give oxygen.

If not breathing, give artificial respiration. Get medical attention.

Clean mouth with water. Get medical attention. Ingestion

Most important symptoms and

effects

Notes to Physician

Difficulty in breathing. . Symptoms of overexposure may be headache, dizziness, tiredness,

nausea and vomiting Treat symptomatically

Revision Date 19-Jan-2018 sec-Butylbenzene

5. Fire-fighting measures

Water spray. Carbon dioxide (CO₂). Dry chemical. Water mist may be used to cool closed **Suitable Extinguishing Media**

containers. Chemical foam. Water mist may be used to cool closed containers.

Unsuitable Extinguishing Media No information available

Flash Point 45 °C / 113 °F

Method -No information available

Autoignition Temperature 415 °C / 779 °F

Explosion Limits

Upper 6.90% Lower 0.80%

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Vapors may travel to source of ignition and flash back. Containers may explode when heated. Vapors may form explosive mixtures with air.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO2).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
2	2	0	N/A

Accidental release measures

Personal Precautions Environmental Precautions Remove all sources of ignition. Take precautionary measures against static discharges. See Section 12 for additional Ecological Information.

Up

Methods for Containment and Clean Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Avoid contact with skin and eyes. Do not breathe mist/vapors/spray. Take precautionary Handling

measures against static discharges. Use spark-proof tools and explosion-proof equipment. Use only non-sparking tools. Keep away from open flames, hot surfaces and sources of

ignition.

Storage Keep in a dry, cool and well-ventilated place. Refer product specification and/or product

label for specific storage temperature requirement. Keep container tightly closed. Keep away from heat, sparks and flame. Flammables area. Keep container tightly closed in a dry

and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

This product does not contain any hazardous materials with occupational exposure limitsestablished by the region specific regulatory bodies.

sec-Butylbenzene Revision Date 19-Jan-2018

·

Engineering Measures Ensure adequate ventilation, especially in confined areas. Use explosion-proof

electrical/ventilating/lighting/equipment.

Personal Protective Equipment

Eye/face ProtectionWear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protectionWear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory ProtectionNo protective equipment is needed under normal use conditions.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical StateLiquidAppearanceColorlessOdorOdorless

Odor Threshold
pHNo information available
No information available

Melting Point/Range -75 °C / -103 °F

Boiling Point/Range 173 - 174 °C / 343.4 - 345.2 °F @ 760 mmHg

Flash Point 45 °C / 113 °F Evaporation Rate No information available

Flammability (solid,gas) Not applicable

Flammability or explosive limits

Upper 6.90% **Lower** 0.80%

Vapor Pressure 1.33 hPa @ 19 °C

Vapor Density 4.62 Specific Gravity 0.860

SolubilityNo information availablePartition coefficient; n-octanol/waterNo data availableAutoignition Temperature415 °C / 779 °FDecomposition TemperatureNo information availableViscosityNo information available

Molecular FormulaC10 H14Molecular Weight134.22

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Keep away from open flames, hot surfaces and sources of ignition. Incompatible products.

Incompatible Materials Strong oxidizing agents

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous PolymerizationNo information available.

Hazardous Reactions None under normal processing.

Revision Date 19-Jan-2018 sec-Butylbenzene

11. Toxicological information

Acute Toxicity

Product Information Component Information No acute toxicity information is available for this product

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
sec-Butylbenzene	LD50 = 2240 μL/kg (Rat)	LD50 > 16 mL/kg (Rabbit)	Not listed

Toxicologically Synergistic

No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
sec-Butylbenzene	135-98-8	Not listed				

No information available **Mutagenic Effects**

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

None known STOT - single exposure STOT - repeated exposure None known

Aspiration hazard No information available

delayed

Symptoms / effects,both acute and Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Persistence and Degradability Insoluble in water May persist based on information available.

Bioaccumulation/ Accumulation No information available.

Mobility . Is not likely mobile in the environment due its low water solubility.

Component	log Pow
sec-Butylbenzene	4.24

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

sec-Butylbenzene Revision Date 19-Jan-2018

14. Transport information

DOT

UN-No UN2709
Hazard Class 3
Packing Group III
TDG

UN-No UN2709
Hazard Class 3
Packing Group III

<u>IATA</u>

UN-No UN2709

Proper Shipping Name BUTYLBENZENES

Hazard Class 3 Packing Group III

IMDG/IMO

UN-No UN2709

Proper Shipping Name BUTYLBENZENES

Hazard Class 3
Packing Group III

15. Regulatory information

United States of America Inventory

ſ	Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Γ	sec-Butylbenzene	135-98-8	X	ACTIVE	-

Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed '-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
sec-Butylbenzene	135-98-8	X	-	205-227-0	Х	X	Х	Χ	KE-04204

U.S. Federal Regulations

SARA 313 Not applicable

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act) Not applicable

Clean Air Act Not applicable

OSHA - Occupational Safety and

Health Administration

Not applicable

CERCLA Not applicable

California Proposition 65 This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know

sec-Butylbenzene Revision Date 19-Jan-2018

Regulations

1							
	Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island	
	sec-Butylbenzene	X	-	Х	=	-	

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland

Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

Revision Date 19-Jan-2018 Print Date 19-Jan-2018

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Creation Date 11-Jun-2009 Revision Date 17-Jan-2018 Revision Number 4

1. Identification

Product Name Toluene

Cat No.: T326F-1GAL; T326P-4; T326S-20; T326S-20LC

CAS-No 108-88-3

Synonyms Tol; Methylbenzene

Recommended Use Laboratory chemicals.

Uses advised against Not for food, drug, pesticide or biocidal product use

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids

Skin Corrosion/irritation

Category 2
Serious Eye Damage/Eye Irritation

Reproductive Toxicity

Specific target organ toxicity (single exposure)

Target Organs - Respiratory system, Central nervous system (CNS).

Specific target organ toxicity - (repeated exposure)

Category 2
Category 3

Target Organs - Kidney, Liver, spleen, Blood.

Aspiration Toxicity Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Highly flammable liquid and vapor May be fatal if swallowed and enters airways Causes skin irritation Causes serious eye irritation May cause respiratory irritation May cause drowsiness or dizziness

Toluene Revision Date 17-Jan-2018

Suspected of damaging the unborn child

Causes damage to organs through prolonged or repeated exposure



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Wash face, hands and any exposed skin thoroughly after handling

Wear eye/face protection

Do not breathe dust/fume/gas/mist/vapors/spray

Do not eat, drink or smoke when using this product

Use only outdoors or in a well-ventilated area

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Keep cool

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skir

If skin irritation occurs: Get medical advice/attention

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Wash contaminated clothing before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Indestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Do NOT induce vomiting

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

WARNING. Reproductive Harm - https://www.p65warnings.ca.gov/.

3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Toluene	108-88-3	>95

Toluene Revision Date 17-Jan-2018

4. First-aid measures

General Advice If symptoms persist, call a physician.

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get

medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists,

call a physician.

Inhalation Move to fresh air. If not breathing, give artificial respiration. Get medical attention if

symptoms occur. Risk of serious damage to the lungs.

Ingestion Clean mouth with water and drink afterwards plenty of water. Do not induce vomiting. Call a

physician or Poison Control Center immediately. If vomiting occurs naturally, have victim

lean forward.

Most important symptoms and

effects

Breathing difficulties. Causes central nervous system depression: Inhalation of high vapor

concentrations may cause symptoms like headache, dizziness, tiredness, nausea and

vomiting

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide. Cool closed

containers exposed to fire with water spray.

Unsuitable Extinguishing Media No information available

Flash Point 4 °C / 39.2 °F

Method - No information available

Autoignition Temperature 535 °C / 995 °F

Explosion Limits

Upper 7.1 vol %
Lower 1.1 vol %
Oxidizing Properties Not oxidising

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Flammable. Containers may explode when heated. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO2)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

HealthFlammabilityInstabilityPhysical hazards330N/A

6. Accidental release measures

Personal Precautions Use personal protective equipment. Ensure adequate ventilation. Remove all sources of

ignition. Take precautionary measures against static discharges.

Revision Date 17-Jan-2018 **Toluene**

Environmental Precautions

Should not be released into the environment. Do not flush into surface water or sanitary

sewer system.

Handling

Methods for Containment and Clean Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Ensure adequate ventilation. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. To avoid ignition of vapors by

static electricity discharge, all metal parts of the equipment must be grounded. Take

precautionary measures against static discharges.

Keep containers tightly closed in a dry, cool and well-ventilated place. Flammables area. Storage

Keep away from heat and sources of ignition.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Toluene	TWA: 20 ppm	(Vacated) TWA: 100 ppm	IDLH: 500 ppm	TWA: 50 ppm
		(Vacated) TWA: 375 mg/m ³	TWA: 100 ppm	TWA: 188 mg/m ³
		Ceiling: 300 ppm	TWA: 375 mg/m ³	_
		(Vacated) STEL: 150 ppm	STEL: 150 ppm	
		(Vacated) STEL: 560 mg/m ³	STEL: 560 mg/m ³	
		TWA: 200 ppm		

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Ensure that eyewash stations and safety showers are close to the workstation location. Use **Engineering Measures**

explosion-proof electrical/ventilating/lighting/equipment. Ensure adequate ventilation,

especially in confined areas.

Personal Protective Equipment

Wear appropriate protective eyeglasses or chemical safety goggles as described by **Eye/face Protection**

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Long sleeved clothing. Skin and body protection

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

9. Physical and chemical properties

Physical State Liquid **Appearance** Colorless Odor aromatic **Odor Threshold** 1.74 ppm Not applicable **Melting Point/Range** -95 °C / -139 °F

Toluene Revision Date 17-Jan-2018

Boiling Point/Range 111 °C / 231.8 °F @ 760 mmHg

Flash Point 4 °C / 39.2 °F
Evaporation Rate 2.4 (Butyl acetate = 1.0)

Flammability (solid,gas) Not applicable

Flammability or explosive limits

 Upper
 7.1 vol %

 Lower
 1.1 vol %

Vapor Pressure 29 mbar @ 20 °C

Vapor Density3.1Specific Gravity0.866

SolubilityInsoluble in waterPartition coefficient; n-octanol/waterNo data availableAutoignition Temperature535 °C / 995 °FDecomposition TemperatureNo information availableViscosity0.6 mPa.s @ 20 °C

Molecular Formula C7 H8
Molecular Weight 92 14

Molecular Weight 92.14

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Stable under normal conditions.

Conditions to Avoid Incompatible products. Excess heat. Keep away from open flames, hot surfaces and

sources of ignition.

Incompatible Materials Strong oxidizing agents, Strong acids, Strong bases, Halogenated compounds

Hazardous Decomposition Products Carbon monoxide (CO), Carbon dioxide (CO2)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information
Component Information

Component intermation			
Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Toluene	> 5000 mg/kg (Rat)	LD50 = 12000 mg/kg (Rabbit)	26700 ppm (Rat) 1 h

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Irritating to eyes, respiratory system and skin

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Toluene	108-88-3	Not listed				

Mutagenic Effects Not mutagenic in AMES Test

Reproductive Effects Experiments have shown reproductive toxicity effects on laboratory animals.

Developmental EffectsDevelopmental effects have occurred in experimental animals.

Revision Date 17-Jan-2018 **Toluene**

Teratogenicity Possible risk of harm to the unborn child.

STOT - single exposure Respiratory system Central nervous system (CNS)

Kidney Liver spleen Blood STOT - repeated exposure

No information available **Aspiration hazard**

delayed

Symptoms / effects,both acute and Causes central nervous system depression: Inhalation of high vapor concentrations may

cause symptoms like headache, dizziness, tiredness, nausea and vomiting

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Contains a substance which is:. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea	
Toluene	EC50: = 12.5 mg/L, 72h	50-70 mg/L LC50 96 h	EC50 = 19.7 mg/L 30 min	EC50: = 11.5 mg/L, 48h	
	static (Pseudokirchneriella	5-7 mg/L LC50 96 h	_	(Daphnia magna)	
	subcapitata)	15-19 mg/L LC50 96 h		EC50: 5.46 - 9.83 mg/L, 48h	
	EC50: > 433 mg/L, 96h	28 mg/L LC50 96 h		Static (Daphnia magna)	
	(Pseudokirchneriella	12 mg/L LC50 96 h			
	subcapitata)				
				1	

Persistence and Degradability Soluble in water Persistence is unlikely based on information available.

Ш

No information available. **Bioaccumulation/ Accumulation**

Mobility . Will likely be mobile in the environment due to its water solubility.

Component	log Pow	
Toluene	2.7	

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Toluene - 108-88-3	U220	-

14. Transport information

DOT

UN1294 **UN-No Proper Shipping Name TOLUENE Hazard Class** 3

Packing Group

TDG

UN1294 **UN-No Proper Shipping Name TOLUENE**

Hazard Class Packing Group Ш

IATA

UN1294 **UN-No Proper Shipping Name TOLUENE**

Hazard Class

Toluene Revision Date 17-Jan-2018

Packing Group

IMDG/IMO

UN-No UN1294
Proper Shipping Name TOLUENE

Hazard Class 3
Packing Group II

15. Regulatory information

All of the components in the product are on the following Inventory lists: X = listed

Ш

International Inventories

	Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Ī	Toluene	Χ	Х	-	203-625-9	-		Χ	Χ	Х	Х	Х

Legend:

X - Listed

- E Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.
- F Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
- N Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
- P Indicates a commenced PMN substance
- R Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
- S Indicates a substance that is identified in a proposed or final Significant New Use Rule
- T Indicates a substance that is the subject of a Section 4 test rule under TSCA.
- XU Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).
- Y1 Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.
- Y2 Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b)

Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Toluene	108-88-3	>95	1.0

SARA 311/312 Hazard Categories See section 2 for more information

CWA (Clean Water Act)

o i i i i joi o i i i i i i i i i i i i				
Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Toluene	X	1000 lb	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Toluene	Х		-

OSHA Occupational Safety and Health Administration Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Toluene	1000 lb 1 lb	-

California Proposition 65

This product contains the following proposition 65 chemicals

Toluene Revision Date 17-Jan-2018

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Toluene	108-88-3	Developmental	-	Developmental

U.S. State Right-to-Know

Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Toluene	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): Y
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade Serious risk, Grade 3

	16. Other information
_	 5 1

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 11-Jun-2009

 Revision Date
 17-Jan-2018

 Print Date
 17-Jan-2018

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS



SAFETY DATA SHEET

Creation Date 03-Feb-2010 Revision Date 14-Jul-2016 Revision Number 2

1. Identification

Product Name Trichloroethylene

Cat No.: T340-4; T341-4; T341-20; T341-500; T403-4

Synonyms Trichloroethene (Stabilized/Technical/Electronic/Certified ACS)

Recommended Use Laboratory chemicals.

Uses advised against

Details of the supplier of the safety data sheet

Company

Fisher Scientific One Reagent Lane Fair Lawn, NJ 07410 Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300 CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin Corrosion/irritation

Serious Eye Damage/Eye Irritation

Skin Sensitization

Germ Cell Mutagenicity

Category 2

Category 1

Category 2

Category 1

Category 2

Category 1

Category 2

Category 2

Category 2

Category 3

Target Organs - Central nervous system (CNS).

Specific target organ toxicity - (repeated exposure) Category 2

Target Organs - Kidney, Liver, Heart, spleen, Blood.

Label Elements

Signal Word

Danger

Hazard Statements

Causes skin irritation
Causes serious eye irritation
May cause an allergic skin reaction
May cause drowsiness or dizziness
Suspected of causing genetic defects
May cause cancer

May cause damage to organs through prolonged or repeated exposure

Trichloroethylene Revision Date 14-Jul-2016



Precautionary Statements

Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Wash face, hands and any exposed skin thoroughly after handling

Contaminated work clothing should not be allowed out of the workplace

Do not breathe dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Wear protective gloves/protective clothing/eye protection/face protection

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

IF ON SKIN: Wash with plenty of soap and water

Take off contaminated clothing and wash before reuse

If skin irritation or rash occurs: Get medical advice/attention

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing If eye irritation persists: Get medical advice/attention

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Harmful to aquatic life with long lasting effects

WARNING! This product contains a chemical known in the State of California to cause cancer, birth defects or other reproductive harm.

3. Composition / information on ingredients

Component	CAS-No	Weight %
Trichloroethylene	79-01-6	100

4. First-aid measures

General Advice Show this safety data sheet to the doctor in attendance. Immediate medical attention is

required.

Eye ContactRinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. In

the case of contact with eyes, rinse immediately with plenty of water and seek medical

advice.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Immediate medical

attention is required.

Inhalation Move to fresh air. If not breathing, give artificial respiration. Do not use mouth-to-mouth

method if victim ingested or inhaled the substance; give artificial respiration with the aid of a

Trichloroethylene Revision Date 14-Jul-2016

pocket mask equipped with a one-way valve or other proper respiratory medical device.

Immediate medical attention is required.

Ingestion Do not induce vomiting. Call a physician or Poison Control Center immediately.

Most important symptoms/effects None reasonably foreseeable. May cause allergic skin reaction. Inhalation of high vapor

concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting: Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle

pain or flushing

Notes to Physician Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

Unsuitable Extinguishing Media No information available

Flash Point No information available No information available

Autoignition Temperature 410 °C / 770 °F

Explosion Limits

Upper 10.5 vol %
Lower 8 vol %
Oxidizing Properties Not oxidising

Sensitivity to Mechanical Impact No information available Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Thermal decomposition can lead to release of irritating gases and vapors. Containers may explode when heated. Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Hydrogen chloride gas Chlorine Phosgene Carbon monoxide (CO) Carbon dioxide (CO2)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

<u>NFPA</u>

Health	Flammability	Instability	Physical hazards
2	1	0	N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment. Keep people away from

and upwind of spill/leak. Evacuate personnel to safe areas.

Environmental Precautions Should not be released into the environment. Do not flush into surface water or sanitary

sewer system.

Methods for Containment and Clean Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. **Up**

	7. Handling and storage
Handling	Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Use only under a chemical fume hood. Do not breathe vapors or spray mist. Do not ingest.
Storage	Keep containers tightly closed in a dry, cool and well-ventilated place. Protect from light. Do not store in aluminum containers.

Revision Date 14-Jul-2016 **Trichloroethylene**

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Trichloroethylene	TWA: 10 ppm	(Vacated) TWA: 50 ppm	IDLH: 1000 ppm	TWA: 100 ppm
	STEL: 25 ppm	(Vacated) TWA: 270 mg/m ³		TWA: 535 mg/m ³
		Ceiling: 200 ppm		STEL: 200 ppm
		(Vacated) STEL: 200 ppm		STEL: 1080 mg/m ³
		(Vacated) STEL: 1080		_
		mg/m³		
		TWA: 100 ppm		

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Use only under a chemical fume hood. Ensure adequate ventilation, especially in confined **Engineering Measures**

areas. Ensure that eyewash stations and safety showers are close to the workstation

location.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by

OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard

EN166.

Skin and body protection Long sleeved clothing.

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard **Respiratory Protection**

EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if

exposure limits are exceeded or if irritation or other symptoms are experienced.

Handle in accordance with good industrial hygiene and safety practice. **Hygiene Measures**

9. Physical and chemical properties

Physical State Liquid **Appearance** Colorless Characteristic Odor

Odor Threshold No information available

No information available -85 °C / -121 °F Melting Point/Range

Boiling Point/Range 87 °C / 188.6 °F Flash Point No information available

Evaporation Rate 0.69 (Carbon Tetrachloride = 1.0)

Flammability (solid,gas) Not applicable

Flammability or explosive limits

Upper 10.5 vol % Lower 8 vol %

Vapor Pressure 77.3 mbar @ 20 °C **Vapor Density** 4.5 (Air = 1.0)

1.460 **Specific Gravity**

Slightly soluble in water Solubility Partition coefficient; n-octanol/water No data available **Autoignition Temperature** 410 °C / 770 °F

Decomposition Temperature > 120°C

0.55 mPa.s (25°C) **Viscosity**

Trichloroethylene Revision Date 14-Jul-2016

Molecular FormulaC2 H Cl3Molecular Weight131.39

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Light sensitive.

Conditions to Avoid Incompatible products. Excess heat. Exposure to light. Exposure to moist air or water.

Incompatible Materials Strong oxidizing agents, Strong bases, Amines, Alkali metals, Metals,

Hazardous Decomposition Products Hydrogen chloride gas, Chlorine, Phosgene, Carbon monoxide (CO₂), Carbon dioxide (CO₂)

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Trichloroethylene	LD50 = 4290 mg/kg (Rat) LD50 = 4920 mg/kg (Rat)	LD50 > 20 g/kg (Rabbit) LD50 = 29000 mg/kg (Rabbit)	LC50 = 26 mg/L (Rat) 4 h

Toxicologically Synergistic

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

No information available

 Irritation
 Irritating to eyes and skin

 Sensitization
 No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Trichloroethylene	79-01-6	Group 1	Reasonably	A2	Х	Not listed
1		·	Anticipated			

IARC: (International Agency for Research on Cancer)

IARC: (International

IARC: (International Agency for Research on Cancer)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans Group 2B - Possibly Carcinogenic to Humans

NTP: (National Toxicity Program)

NTP: (National Toxicity Program)

Known - Known Carcinogen

Reasonably Anticipated - Reasonably Anticipated to be a Human

Carcinogen

ACGIH: (American Conference of Governmental Industrial

Hygienists)

A1 - Known Human Carcinogen
A2 - Suspected Human Carcinogen

A3 - Animal Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

Mutagenic Effects Mutagenic effects have occurred in humans.

Reproductive Effects

No information available.

Developmental Effects

No information available.

Teratogenicity

No information available.

Revision Date 14-Jul-2016 **Trichloroethylene**

STOT - single exposure Central nervous system (CNS) STOT - repeated exposure Kidney Liver Heart spleen Blood

No information available **Aspiration hazard**

delayed

Symptoms / effects,both acute and Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting: Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest

pain, muscle pain or flushing

No information available **Endocrine Disruptor Information**

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Do not empty into drains. The product contains following substances which are hazardous for the environment. Contains a substance which is:. Harmful to aquatic organisms. Toxic to aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Trichloroethylene	EC50: = 175 mg/L, 96h	LC50: 39 - 54 mg/L, 96h	EC50 = 0.81 mg/L 24 h	EC50: = 2.2 mg/L, 48h
	(Pseudokirchneriella	static (Lepomis macrochirus)	EC50 = 115 mg/L 10 min	(Daphnia magna)
	subcapitata)	LC50: 31.4 - 71.8 mg/L, 96h	EC50 = 190 mg/L 15 min	
	EC50: = 450 mg/L, 96h	flow-through (Pimephales	EC50 = 235 mg/L 24 h	
	(Desmodesmus	promelas)	EC50 = 410 mg/L 24 h	
	subspicatus)		EC50 = 975 mg/L 5 min	

Persistence and Degradability Persistence is unlikely based on information available.

Bioaccumulation/ Accumulation No information available.

Mobility Will likely be mobile in the environment due to its volatility.

Component	log Pow
Trichloroethylene	2.4

13. Disposal considerations

Waste Disposal Methods

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Trichloroethylene - 79-01-6	U228	=

14. Transport information

DOT

UN1710 **UN-No**

Proper Shipping Name TRICHLOROETHYLENE

Hazard Class 6.1 **Packing Group** Ш

TDG

UN-No UN1710

Proper Shipping Name TRICHLOROETHYLENE

Hazard Class 6.1 **Packing Group** Ш

IATA

UN-No UN1710

Proper Shipping Name TRICHLOROETHYLENE

Trichloroethylene Revision Date 14-Jul-2016

Hazard Class 6.1 Packing Group III

IMDG/IMO

UN-No UN1710

Proper Shipping Name TRICHLOROETHYLENE

Hazard Class 6.1 Packing Group III

15. Regulatory information

All of the components in the product are on the following Inventory lists: X = listed

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Trichloroethylene	Χ	Χ	-	201-167-4	-		Χ	Χ	Χ	Χ	Χ

Legend:

- X Listed
- E Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.
- F Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
- N Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
- P Indicates a commenced PMN substance
- R Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
- S Indicates a substance that is identified in a proposed or final Significant New Use Rule
- T Indicates a substance that is the subject of a Section 4 test rule under TSCA.
- XU Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).
- Y1 Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.
- Y2 Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

Component	TSCA 12(b)
Trichloroethylene	Section 5

SARA 313

ONIA 313							
Component	CAS-No	Weight %	SARA 313 - Threshold Values %				
Trichloroethylene	79-01-6	100	0.1				

SARA 311/312 Hazard Categories

Acute Health Hazard Yes
Chronic Health Hazard Yes
Fire Hazard No
Sudden Release of Pressure Hazard No
Reactive Hazard No

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Trichloroethylene	X	100 lb	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Trichloroethylene	X		-

OSHA Occupational Safety and Health Administration Not applicable

Trichloroethylene Revision Date 14-Jul-2016

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Trichloroethylene	100 lb 1 lb	-

California Proposition 65

This product contains the following proposition 65 chemicals

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Trichloroethylene	79-01-6	Carcinogen	14 μg/day	Developmental
		Developmental	50 μg/day	Carcinogen
		Male Reproductive		_

U.S. State Right-to-Know

Regulations

Component		Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
ſ	Trichloroethylene	Χ	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): Y
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

16. Other information

Prepared By Regulatory Affairs

Thermo Fisher Scientific

Email: EMSDS.RA@thermofisher.com

 Creation Date
 03-Feb-2010

 Revision Date
 14-Jul-2016

 Print Date
 14-Jul-2016

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard

replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

SAFETY DATA SHEET



Vinyl Chloride

Section 1. Identification

GHS product identifier

: Vinyl Chloride

Chemical name

Other means of

: vinyl chloride

other means of identification

: chloroethylene; Ethene, chloro-; Chloroethene; Vinyl chloride, monomer; Ethene, chloro-(vinyl chloride); Vinyl chloride monomer; Monochloroethylene; Monochloroethene;

Ethylene monochloride; VCM; VC

Product type

: Gas.

Product use

: Synthetic/Analytical chemistry.

Synonym

: chloroethylene; Ethene, chloro-; Chloroethene; Vinyl chloride, monomer; Ethene,

chloro- (vinyl chloride); Vinyl chloride monomer; Monochloroethylene;

Monochloroethene: Ethylene monochloride: VCM; VC

SDS#

: 001067

Supplier's details

: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road

Suite 100

Radnor, PA 19087-5283

1-610-687-5253

24-hour telephone

: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status

: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Classification of the substance or mixture

: FLAMMABLE GASES - Category 1

GASES UNDER PRESSURE - Liquefied gas

CARCINOGENICITY - Category 1

SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (liver) - Category 2

GHS label elements

Hazard pictograms







Signal word

: Danger

Hazard statements

: Extremely flammable gas.

May form explosive mixtures with air.

Contains gas under pressure; may explode if heated.

May cause frostbite

May displace oxygen and cause rapid suffocation.

May cause cancer.

May cause damage to organs through prolonged or repeated exposure. (liver)

Precautionary statements

General

: Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction. Always keep container in upright position. Approach suspected leak area with caution.

Prevention

: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection. Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not breathe gas.

Date of issue/Date of revision : 7/9/2018 Date of previous issue : 10/11/2016 Version : 0.02 1/12

Section 2. Hazards identification

Response : Get medical attention if you feel unwell. IF exposed or concerned: Get medical

attention. Leaking gas fire: Do not extinguish, unless leak can be stopped safely.

Eliminate all ignition sources if safe to do so.

Storage : Store locked up. Protect from sunlight. Store in a well-ventilated place.

Disposal : Dispose of contents and container in accordance with all local, regional, national and

international regulations.

Hazards not otherwise

classified

identification

: In addition to any other important health or physical hazards, this product may displace oxygen and cause rapid suffocation.

Section 3. Composition/information on ingredients

Substance/mixture : Substance
Chemical name : vinyl chloride

Other means of : vinyl chloride : chloroethylene; Et

: chloroethylene; Ethene, chloro-; Chloroethene; Vinyl chloride, monomer; Ethene, chloro-(vinyl chloride); Vinyl chloride monomer; Monochloroethylene; Monochloroethene;

Ethylene monochloride; VCM; VC

Product code : 001067

CAS number/other identifiers

CAS number : 75-01-4

Ingredient name	%	CAS number
vinyl chloride	100	75-01-4

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10

minutes. Get medical attention.

Inhalation: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If

not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway.

Loosen tight clothing such as a collar, tie, belt or waistband.

Skin contact : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. To avoid the risk of static discharges and gas ignition, soak contaminated

clothing thoroughly with water before removing it. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly

before reuse.

Ingestion : As this product is a gas, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contactInhalationNo known significant effects or critical hazards.No known significant effects or critical hazards.

Skin contact : No known significant effects or critical hazards.

Frostbite : Try to warm up the frozen tissues and seek medical attention.

Ingestion : As this product is a gas, refer to the inhalation section.

Over-exposure signs/symptoms

Date of issue/Date of revision : 7/9/2018 Date of previous issue : 10/11/2016 Version : 0.02 2/12

Vinyl Chloride

Section 4. First aid measures

Eye contact : No specific data.

Inhalation : No specific data.

Skin contact : No specific data.

Ingestion : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician

: Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

Specific treatments

tments : No specific treatment.

Protection of first-aiders

: No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing

media

Unsuitable extinguishing media

: Use an extinguishing agent suitable for the surrounding fire.

: None known.

Specific hazards arising from the chemical

: Contains gas under pressure. Extremely flammable gas. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion.

Hazardous thermal decomposition products

: Decomposition products may include the following materials: carbon dioxide

carbon monoxide halogenated compounds

Special protective actions for fire-fighters

: Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool. If involved in fire, shut off flow immediately if it can be done without risk. If this is impossible, withdraw from area and allow fire to burn. Fight fire from protected location or maximum possible distance. Eliminate all ignition sources if safe to do so.

Special protective equipment for fire-fighters

: Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel

: Accidental releases pose a serious fire or explosion hazard. No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders

: If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Date of issue/Date of revision : 7/9/2018 Date of previous issue : 10/11/2016 Version : 0.02 3/12

Section 6. Accidental release measures

Environmental precautions

: Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill

: Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment.

Large spill

: Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures

: Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Do not get in eyes or on skin or clothing. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.

Use only non-sparking tools. Empty containers retain product residue and can be hazardous. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Do not breathe gas. Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood.

Advice on general occupational hygiene

Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities

: Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Eliminate all ignition sources. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F). Store locked up. Keep container tightly closed and sealed until ready for use. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
vinyl chloride	ACGIH TLV (United States, 3/2017). TWA: 1 ppm 8 hours. OSHA PEL (United States, 6/2016).
	STEL: 5 ppm 15 minutes. TWA: 1 ppm 8 hours. OSHA PEL 1989 (United States, 3/1989). STEL: 5 ppm 15 minutes. TWA: 1 ppm 8 hours.

Appropriate engineering controls

: Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Date of issue/Date of revision : 7/9/2018 Date of previous issue : 10/11/2016 Version : 0.02 4/12

Section 8. Exposure controls/personal protection

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures

: Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period.

Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with sideshields.

Skin protection

Hand protection

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection

: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear antistatic protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.

Other skin protection

: Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection

: Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

Physical state : Gas. [COLORLESS GAS OR LIQUID (BELOW 7 F) WITH A PLEASANT ODOR AT

HIGH CONCENTRATIONS. [NOTE: SHIPPED AS A LIQUEFIED COMPRESSED

GAS.]

Color : Colorless.

Odor : Characteristic.
Odor threshold : Not available.
pH : Not available.

 Melting point
 : -153.8°C (-244.8°F)

 Boiling point
 : -13.4°C (7.9°F)

 Critical temperature
 : 158.45°C (317.2°F)

Flash point : Closed cup: -78°C (-108.4°F) Open cup: -78°C (-108.4°F)

Evaporation rate : Not available.

Flammability (solid, gas) : Not available.

Lower and upper explosive (flammable) limits : Lower: 3.8% Upper: 29.3%

Date of issue/Date of revision : 7/9/2018 Date of previous issue : 10/11/2016 Version : 0.02 5/12

Vinyl Chloride

Section 9. Physical and chemical properties

Vapor pressure: Not available.Vapor density: 2.2 (Air = 1)

Specific Volume (ft ³/lb) : 6.25

Gas Density (lb/ft 3) : 0.16129 (21.1°C / 70 to °F)

Relative density : Not applicable.

Solubility : Not available.

Solubility in water : 1.1 q/l

Solubility in water
Partition coefficient: noctanol/water

: 1.38

Auto-ignition temperature
Decomposition temperature
Viscosity

472°C (881.6°F)
Not available.
Not applicable.
Not available.
62.5 g/mole

Molecular weight Aerosol product

Flow time (ISO 2431)

Heat of combustion : -18924336 J/kg

Section 10. Stability and reactivity

Reactivity: No specific test data related to reactivity available for this product or its ingredients.

Chemical stability: The product is stable.

Possibility of hazardous reactions

: Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid

: Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

Incompatible materials: Oxidizers

Hazardous decomposition products

 Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Hazardous polymerization: Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Date of issue/Date of revision : 7/9/2018 Date of previous issue : 10/11/2016 Version : 0.02 6/12

Vinyl Chloride

Section 11. Toxicological information

Classification

Product/ingredient name	OSHA	IARC	NTP
vinyl chloride	+	1	Known to be a human carcinogen.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Name	Category	Route of exposure	Target organs
vinyl chloride	Category 2	Not determined	liver

Aspiration hazard

Not available.

Information on the likely

routes of exposure

: Not available.

Potential acute health effects

Eye contact
 Inhalation
 No known significant effects or critical hazards.
 Skin contact
 No known significant effects or critical hazards.
 No known significant effects or critical hazards.

Ingestion : As this product is a gas, refer to the inhalation section.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact: No specific data.Inhalation: No specific data.Skin contact: No specific data.Ingestion: No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate

: Not available.

effects

Potential delayed effects

: Not available.

Long term exposure

Potential immediate

: Not available.

effects

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General: May cause damage to organs through prolonged or repeated exposure.

Carcinogenicity : May cause cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity : No known significant effects or critical hazards.
 Teratogenicity : No known significant effects or critical hazards.
 Developmental effects : No known significant effects or critical hazards.
 Fertility effects : No known significant effects or critical hazards.

Date of issue/Date of revision : 7/9/2018 Date of previous issue : 10/11/2016 Version : 0.02 7/12

Section 11. Toxicological information

Numerical measures of toxicity Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogPow	BCF	Potential
vinyl chloride	1.38	-	low

Mobility in soil

Soil/water partition coefficient (Koc)

: Not available.

Other adverse effects

: No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods

: The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate

United States - RCRA Toxic hazardous waste "U" List

Ingredient	CAS#		Reference number
Vinyl chloride; Ethene, chloro-	75-01-4	Listed	U043

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1086	UN1086	UN1086	UN1086	UN1086
UN proper shipping name	VINYL CHLORIDE, STABILIZED	VINYL CHLORIDE, STABILIZED	VINYL CHLORIDE, STABILIZED	VINYL CHLORIDE, STABILIZED	VINYL CHLORIDE, STABILIZED

Date of issue/Date of revision : 7/9/2018 Date of previous issue : 10/11/2016 Version : 0.02 8/12

Vinyl Chloride

Section 14. Transport information

Transport hazard class(es)	2.1	2.1	2.1	2.1	2.1
Packing group	-	-	-	-	-
Environmental hazards	No.	No.	No.	No.	No.

[&]quot;Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product."

Additional information

DOT Classification : Reportable quantity 1 lbs / 0.454 kg. Package sizes shipped in quantities less than

the product reportable quantity are not subject to the RQ (reportable quantity)

transportation requirements. **Limited quantity** Yes.

Quantity limitation Passenger aircraft/rail: Forbidden. Cargo aircraft: 150 kg.

Special provisions 21, B44, T50

TDG Classification : Product classified as per the following sections of the Transportation of Dangerous

Goods Regulations: 2.13-2.17 (Class 2).

Explosive Limit and Limited Quantity Index 0.125

ERAP Index 3000

Passenger Carrying Road or Rail Index Forbidden

IATA : Quantity limitation Passenger and Cargo Aircraft: Forbidden. Cargo Aircraft Only: 150

kg.

Special precautions for user : Transport within user's premises: always transport in closed containers that are

upright and secure. Ensure that persons transporting the product know what to do in the

event of an accident or spillage.

Transport in bulk according : Not available. to Annex II of MARPOL and

the IBC Code

Section 15. Regulatory information

U.S. Federal regulations : TSCA 8(a) CDR Exempt/Partial exemption: Not determined

Clean Water Act (CWA) 307: vinyl chloride

Clean Air Act (CAA) 112 regulated flammable substances: vinyl chloride

Clean Air Act Section 112

(b) Hazardous Air **Pollutants (HAPs)** : Listed

Clean Air Act Section 602

Class I Substances

: Not listed

Clean Air Act Section 602 **Class II Substances**

: Not listed

DEA List I Chemicals

: Not listed

(Precursor Chemicals)

: Not listed

DEA List II Chemicals

(Essential Chemicals)

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

Date of issue/Date of revision : 7/9/2018 : 10/11/2016 Version : 0.02 9/12 Date of previous issue

Section 15. Regulatory information

SARA 311/312

: Refer to Section 2: Hazards Identification of this SDS for classification of substance. Classification

SARA 313

	Product name	CAS number	%
Form R - Reporting requirements	vinyl chloride	75-01-4	100
Supplier notification	vinyl chloride	75-01-4	100

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : This material is listed. **New York** This material is listed. : This material is listed. **New Jersey Pennsylvania** : This material is listed.

California Prop. 65

⚠ WARNING: This product can expose you to Vinyl chloride, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Ingredient name	•	Maximum acceptable dosage level
Vinyl chloride	Yes.	-

International regulations

Chemical Weapon Convention List Schedules I, II & III Chemicals

Not listed.

Montreal Protocol (Annexes A, B, C, E)

Not listed.

Stockholm Convention on Persistent Organic Pollutants

Not listed.

Rotterdam Convention on Prior Informed Consent (PIC)

Not listed.

UNECE Aarhus Protocol on POPs and Heavy Metals

Not listed.

Inventory list

Australia : This material is listed or exempted. Canada : This material is listed or exempted. China : This material is listed or exempted. : This material is listed or exempted. **Europe**

Japan : Japan inventory (ENCS): This material is listed or exempted.

Japan inventory (ISHL): This material is listed or exempted.

: This material is listed or exempted. Malaysia **New Zealand** : This material is listed or exempted. : This material is listed or exempted. **Philippines** Republic of Korea : This material is listed or exempted. : This material is listed or exempted. **Taiwan**

Thailand Not determined.

Turkey : This material is listed or exempted.

Date of issue/Date of revision : 7/9/2018 : 10/11/2016 10/12 Version : 0.02 Date of previous issue

Vinyl Chloride


Section 15. Regulatory information

United States : This material is listed or exempted.

Viet Nam : Not determined.

Section 16. Other information

Hazardous Material Information System (U.S.A.)



Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings and the associated label are not required on SDSs or products leaving a facility under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered trademark and service mark of the American Coatings Association, Inc.

The customer is responsible for determining the PPE code for this material. For more information on HMIS® Personal Protective Equipment (PPE) codes, consult the HMIS® Implementation Manual.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

Classification	Justification
FLAMMABLE GASES - Category 1	Expert judgment
GASES UNDER PRESSURE - Liquefied gas	Expert judgment
	Expert judgment
SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (liver) - Category 2	Expert judgment

History

Date of printing : 7/9/2018

Date of issue/Date of : 7/9/2018

revision

Date of previous issue : 10/11/2016

Version : 0.02

Key to abbreviations : ATE = Acute Toxicity Estimate

BCF = Bioconcentration Factor

GHS = Globally Harmonized System of Classification and Labelling of Chemicals

IATA = International Air Transport Association

IBC = Intermediate Bulk Container

IMDG = International Maritime Dangerous Goods

LogPow = logarithm of the octanol/water partition coefficient

MARPOL = International Convention for the Prevention of Pollution From Ships, 1973

as modified by the Protocol of 1978. ("Marpol" = marine pollution)

UN = United Nations

Vinyl Chloride

Section 16. Other information

References : Not available.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Date of issue/Date of revision : 7/9/2018 Date of previous issue : 10/11/2016 Version : 0.02 12/12



HEALTH AND SAFETY WORK PLAN

APPENDIX D
Heat/Cold Stress Protocols

HEAT STRESS

Heat Stress (Hyperthermia)

Heat stress is the body's inability to regulate the core temperature. A worker's susceptibility to heat stress can vary according to his/her physical fitness, degree of acclimation to heat, humidity, age and diet.

- 1. Prior to site activity, the field team leader may make arrangements for heat stress monitoring (i.e., monitoring heart rate, body temperature, and body water loss) during actual site work if conditions warrant. In addition, the FTL is to ensure that each team member has been acclimatized to the prevailing environmental conditions, that personnel are aware of the signs and symptoms of heat sickness, that they have been adequately trained in first aid procedures, and that there are enough personnel on-site to rotate work assignments and schedule work during hours of reduced temperatures. Personnel should not consume alcoholic or caffeinated beverages but rather drink moderate levels of an electrolyte solution and eat well prior to commencing site work.
- Although there is no specific test given during a baseline physical that would identify a
 person's intolerance to heat, some indicators are tobacco or medication use, dietary habits,
 body weight, and chronic conditions such as high blood pressure or diabetes.
- 3. Heat cramps, caused by profuse perspiration with inadequate fluid intake and salt replacement, most often afflict people in good physical condition who work in high temperature and humidity. Heat cramps usually come on suddenly during vigorous activity. Untreated, heat cramps may progress rapidly to heat exhaustion or heat stroke. First aid treatment: remove victim to a cool place and replace lost fluids with water.
- 4. Thirst is not an adequate indicator of heat exposure. Drinking fluid by itself does not indicate sufficient water replacement during heat exposure. A general rule, the amount of water administered should replace the amount of water lost, and it should be administered at regular intervals throughout the day. For every half pound of water lost, 8 ounces of water should be ingested. Water should be replaced by drinking 2 4 ounce servings during every rest period. A recommended alternative to water is an electrolyte drink split 50/50 with water.

- 5. Heat exhaustion results from salt and water loss along with peripheral pooling of blood. Like heat cramps, heat exhaustion tends to occur in persons in good physical health who are working in high temperatures and humidity. Heat exhaustion may come on suddenly as dizziness and collapse. Untreated, heat exhaustion may progress to heat stroke.
- 6. Treatment for heat exhaustion: Move the victim to a cool environment (e.g. air-conditioned room/car), lay victim down and fan him/her. If the air-conditioning is not available, remove the victim to a shaded area, remove shirt, and fan. If symptoms do not subside within an hour, notify 911 to transport to hospital.
- 7. Heat stroke results from the body's inability to dissipate excess heat. A true medical emergency that requires immediate care, it usually occurs when one ignores the signs of heat exhaustion and continues strenuous activities. Working when the relative humidity exceeds 60% is a particular problem. Workers in the early phase of heat stress may not be coherent of they will be confused, delirious or comatose. Changes in behavior, irritability and combativeness are useful early signs of heat stroke.
- 8. Treatment of heat stroke: Move the victim to a cool, air-conditioned environment. Place victim in a semi-reclined position with head elevated and strip to underclothing. Cool victim as rapidly as possible, applying ice packs to the arms and legs and massaging the neck and torso. Spray victim with tepid water and constantly fan to promote evaporation. Notify 911 to transport to hospital as soon as possible.

TABLE 1

SYMPTOMS OF HEAT STRESS

Heat cramps are caused by heavy sweating with inadequate fluid intake. Symptoms include;

- Muscle cramps
- Cramps in the hands, legs, feet and abdomen

Heat exhaustion occurs when body organs attempt to keep the body cool. Symptoms include;

- Pale, cool moist skin
- Core temperature elevated 1-2°
- Thirst
- Anxiety

- Rapid heart rate
- Heavy sweating
- Dizziness
- Nausea

Heat stroke is the most serious form of heat stress. Immediate action must be taken to cool the body before serious injury and death occur. Symptoms are;

- Red, hot, dry skin
- Lack of perspiration
- Seizures
- Dizziness and confusion
- Strong, rapid pulse
- Core temperature of 104° or above
- Coma

TABLE 2

HEAT STRESS INDICATORS

Heat stress indicator	When to measure	If Exceeds	Action
Heart rate (pulse)	Beginning of rest period	110 beats per minute	Shorten next work period by 33%
Oral temperature	Beginning of rest	99°F (after thermometer is under tongue for 3 minutes)	Shorten next work period by 33%
		100.6°F	Prohibit work in impermeable clothing
	1. Before workday		
Body weight	begins (a.m.) 2. After workday		Increase fluid intake
	ends (p.m.)		

COLD STRESS

Cold stress (Hypothermia)

In hypothermia the core body temperature drops below 95°F. Hypothermia can be attributed to a decrease in heat production, increased heat loss or both.

Prevention

Institute the following steps to prevent overexposure of workers to cold:

- 1. Maintain body core temperature at 98.6°F or above by encouraging workers to drink warm liquids during breaks (preferably not coffee) and wear several layers of clothing that can keep the body warm even when the clothing is wet.
- 2. Avoid frostbite by adequately covering hands, feet and other extremities. Clothing such as insulated gloves or mittens, earmuffs and hat liners should be worn. To prevent contact frostbite (from touching metal and cold surfaces below 20°F), workers should wear gloves. Tool handles should be covered with insulating material.
- 3. Adjust work schedules to provide adequate rest periods. When feasible, rotate personnel and perform work during the warmer hours of the day.
- 4. Provide heated shelter. Workers should remove their outer layer(s) of clothing while in the shelter to allow sweat to evaporate.
- 5. In the event that wind barriers are constructed around an intrusive operation (such as drilling), the enclosure must be properly vented to prevent the buildup of toxic or explosive gases or vapors. Care must be taken to keep a heat source away from flammable substances.
- 6. Using a wind chill chart such as the one in Table 3, obtain the equivalent chill temperature (ECT) based on actual wind speed and temperature. Refer to the ECT when setting up work warm-up schedules, planning appropriate clothing, etc. Workers should use warming shelters at regular intervals at or below an ECT of 20°F. For exposed skin, continuous exposure should not be permitted at or below an ECT of -25°F.

Frostbite

Personnel should be aware of symptoms of frostbite/hypothermia. If the following symptoms are noticed in any worker, he/she should immediately go to a warm shelter.

Condition	Skin Surface	Tissue Under Skin	Skin Color
Frostnip	Soft	Soft	Initially red, then white
Frostbite	Hard	Soft	White and waxy
Freezing	Hard	Hard	Blotchy, white to yellow-gray to gray

- 1. Frostnip is the incipient stage of frostbite, brought about by direct contact with a cold object or exposure of a body part to cool/cold air. Wind chill or cold water also can be major factors. This condition is not serious. Tissue damage is minor and the response to care is good. The tip of the nose, tips of ears, upper cheeks and fingers (all areas generally exposed) are most susceptible to frostnip.
- 2. Treatment of frostnip: Care for frostnip by warming affected areas. Usually the worker can apply warmth from his/her bare hands, blow warm air on the site, or, if the fingers are involved, hold them in the armpits. During recovery, the worker may complain of tingling or burning sensation, which is normal. If the condition does not respond to this simple care, begin treatment for frostbite.
- 3. Frostbite: The skin and subcutaneous layers become involved. If frostnip goes untreated, it becomes superficial frostbite. This condition is serious. Tissue damage may be serious. The worker must be transported to a medical facility for evaluation. The tip of the nose, tips of ears, upper cheeks and fingers (all areas generally exposed) are most susceptible to frostbite. The affected area will feel frozen, but only on the surface. The tissue below the surface must still be soft and have normal response to touch. DO NOT squeeze or poke the tissue. The condition of the deeper tissues can be determined by gently palpating the affected area. The skin will turn mottled or blotchy. It may also be white and then turn grayish-yellow.
- 4. Treatment of frostbite: When practical, transport victim as soon as possible. Get the worker inside and keep him/her warm. Do not allow any smoking or alcohol consumption. Thaw frozen parts by immersion, re-warming in a 100°F to 106°F water bath. Water temperature will drop rapidly, requiring additional warm water throughout the process. Cover the thawed part with a dry sterile dressing. Do not puncture or drain any blisters.

NOTE: Never listen to myths and folk tales about the care of frostbite. *Never* rub a frostbitten or frozen area. *Never* rub snow on a frostbitten or frozen area. Rubbing the area may cause

serious damage to already injured tissues. Do not attempt to thaw a frozen area if there is any chance it will be re-frozen.

5. *General cooling/Hypothermia*: General cooling of the body is known as systemic hypothermia. This condition is not a common problem unless workers are exposed to cold for prolonged periods of time without any shelter.

Body Temperature	°C	Symptoms
99-96	37-35.5	Intense, uncontrollable shivering
95-91	35.5-32.7	Violent shivering persists. If victim is conscious, he has difficulty speaking.
90-86	32-30	Shivering decreases and is replaced by strong muscular rigidity. Muscle coordination is affected. Erratic or jerkey movements are produced. Thinking is less clear. General comprehension is dulled. There may be total amnesia. The worker is generally still able to maintain the appearance of psychological contact with his surroundings.
85-81	29.4-27.2	Victim becomes irrational, loses contact with his environment, and drifts into a stuporous state. Muscular rigidity continues. Pulse and respirations are slow and the worker may develop cardiac arrhythmias.
80-78	26.6-18.5	Victim becomes unconscious. He does not respond to the spoken word. Most reflexes cease to function. Heartbeat becomes erratic
Below 78	25.5	Cardiac and respiratory centers of the brain fail. Ventricular fibrillation occurs; probably edema and hemorrhage in the lungs; death.

6. Treatment of hypothermia: Keep worker dry. Remove any wet clothing and replace with dry clothes, or wrap person in dry blankets. Keep person at rest. Do not allow him/her to move around. Transport the victim to a medical facility as soon as possible.

TABLE 3⁽¹⁾
COOLING POWER OF WIND ON EXPOSED FLESH EXPRESSED
AS AN EQUIVALENT TEMPERATURE (UNDER CALM CONDITIONS)

	09		09-	-68	-95	-112	-121	-133	-140	-145	-146	Flesh	
	20		-50	-57	-83	66-	-110	-118	-125	-129	-132		
	40		-40	-47	-70	-85	96-	-104	-109	-113	-116	seconds.	
	30		-30	-36	-58	-72	-82	-88	-94	-98	-100	GREAT DANGER may freeze within 30 seconds.	
ding (°F)P	20	ature (°F)	-20	-26	-46	-58	-67	-74	62-	-82	-85	GREAT I	
erature Rea	10	Shill Temper	-10	-15	-33	-45	-53	-59	-63	-67	69-	R Danger ed flesh	ŧ
Actual Temperature Reading (°F)P	0	Equivalent Chill Temperature (°F)	0	κ̈́	-24	-32	-39	-44	-48	-51	-53	INCREASING DANGER Danger from freezing of exposed flesh within one minute	cho sidt no
▼ ·	10		100	9	6-	8-	-25	-29	-33	-35	-37	INCREASING DA from freezing of e within one minute	Transplay to the total improvement and the transplay of the total
	50	20	16	4	ငှ	-10	-15	-18	-20	-21	um danger	111000 11000	
	30	30 30 15 15	4	0	-5	4	ဖ ှ	. Maximu	oreion foo				
	40		40	37	28	22	18	16	13	7	10	LITTLE DANGER in < hr with dry skin. Maximum danger of false sense of security.	mi bue too
	20		20	48	40	36	32	30	58	27	56	LITTLE in < hr w of false t	Tronch
Estimated	wind Speed	(in mph)	Calm	5	10	15	20	25	30	35	40	(Wind speeds greater than 40 mph have little additional effect.)	

Developed by U.S. Army Research Institute of Environmental Medicine, Natick, MA.

(1) Reproduced from American Conference of Governmental Industrial Hygienists, Threshold Limit Values and Biological Exposure Indices for 1985-1986, p.01.



HEALTH AND SAFETY WORK PLAN

APPENDIX E Field Accident Report



FIELD ACCIDENT REPORT

This report is to be filled out by the designated Site Safety Officer after **EVERY** accident.

PROJECT NAME: _			_PROJECT. NO.:
Date of Accident:		Time:	_Report By:
Type of Accident (Che	eck One):		
	() Vehicular	() Personal	() Property
Name of Injured:			_DOB or Age
How Long Employed:			
Names of Witnesses:			
Description of Accide	nt:		
Action Taken:			
Did the Injured Lose A	Any Time?	How	Much (Days/Hrs.)?
	nt in Use at the Time	of the Accident	(Hard Hat, Safety Glasses, Gloves,
and Welfare Fund.)	·	, .	s his/her claims through his/her Health

APPENDIX D CAMP

737 4th AVENUE SITE 731-747 4th AVENUE BROOKLYN, NEW YORK SITE #C224332

Community Air Monitoring Plan

Submitted To:



New York State Department of Environmental Conservation Division of Environmental Remediation 47-20 21st Street Long Island City, NY 11101

Prepared For:

737 4th Avenue, LLC 26 Harbor Park Drive Port Washington, NY 11050

Prepared By:



P.W. Grosser Consulting Inc. 630 Johnson Avenue, Suite 7 Bohemia, NY 11716 Phone: 631-589-6353 Fax: 631-589-8705

Jennifer Lewis, PG, Vice President

JenniferL@pwgrosser.com

PWGC Project Number: TOT2101



TABLE OF CONTENTS

1.0	INTRODUCTION	1
2.0	REGULATORY REQUIREMENTS	2
3.0	AIR MONITORING	3
3.1	Volatile-Organic Vapor Monitoring, Response-Levels, and Actions	3
3.2	Particulate Monitoring, Response-Levels, and Actions	4
3.3	Odor and Dust Control	
3.	.3.1 Odor Control	4
3.	.3.2 Dust Control	5
3.4	Special Requirements for Work Within 20 Feet of Potentially Exposed Indivi	iduals or Structures
	5	
4.0	RECORD KEEPING	7



1.0 INTRODUCTION

This Community Air Monitoring Plan (CAMP) provides measures for protection for on-site workers and the downwind community (i.e., off-site receptors including residences, businesses, and on-site workers not directly involved in the remedial investigation) from potential airborne contaminant releases resulting from remedial activities performed at 731 to 747 4th Avenue, Brooklyn, New York.

The action levels specified herein require increased monitoring, corrective actions to abate emissions, and/or work shutdown. Additionally, the CAMP helps to confirm that the remedial investigation or actions did not spread contamination off-site through the air.

Based on previous investigations at the site, the primary concerns for this site are VOCs and dust particulates.



2.0 REGULATORY REQUIREMENTS

This CAMP was established in accordance with the following requirements:

- 29 CFR 1910.120(h): This regulation specifies that air shall be monitored to identify and quantify levels of airborne hazardous substances and health hazards, and to determine the appropriate level of protection for workers.
- New York State Department of Health's (NYSDOH) Generic Community Air Monitoring Plan: This
 guidance specifies that a community air-monitoring program shall be implemented to protect the
 surrounding community and to confirm that the work does not spread contamination off-site
 through the air.
- New York State Department of Environmental Conservation (NYSDEC) Division of Environmental Remediation (DER)-10, Appendix 1B – Fugitive Dust and Particulate Monitoring. This guidance provides a basis for developing and implementing a fugitive dust suppression and particulate monitoring program as an element of a site's health and safety program.



3.0 AIR MONITORING

The following sections contain information describing the types, frequency and location of real-time monitoring.

This section addresses the real-time monitoring that will be conducted within the work area, and along the site perimeter, during intrusive activities such as excavation, product recovery, manipulation of soil piles, extraction of sheet piling, etc.

3.1 Volatile-Organic Vapor Monitoring, Response-Levels, and Actions

Volatile organic vapors will be monitored at the downwind perimeter of the immediate work area on a continuous basis during invasive work. Upwind concentrations will be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work will be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment will be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment will be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 ppm above background for the 15-minute average, work activities will be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities will resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities will resume provided that the total organic vapor level 200 feet downwind of the work area or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities will be shutdown.

Time-weighted 15-minute readings will be recorded and be available for NYSDEC personnel to review. Instantaneous readings, if any, used for decision purposes will also be recorded.



3.2 Particulate Monitoring, Response-Levels, and Actions

Particulate concentrations will be monitored continuously at the upwind and downwind perimeters of the work area at temporary particulate monitoring stations. The particulate monitoring will be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of calculating 15-minute running average concentrations for comparison to the airborne particulate action level. The equipment will be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during work activities.

- If the downwind PM-10 particulate level is 100 micrograms per cubic meter (μg/m³) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques will be employed. Work will continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed 150 μg/m³ above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than 150 μg/m³ above the upwind level, work will be stopped, and a re-evaluation of activities initiated. Work will resume provided that dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within 150 μg/m³ of the upwind level and in preventing visible dust migration.

Readings will be recorded and be available for NYSDEC personnel to review.

3.3 Odor and Dust Control

3.3.1 Odor Control

Necessary means will be employed to prevent on and offsite odor nuisances. At a minimum, procedures will include: (a) limiting the area of open excavations; (b) shrouding open excavations with tarps and other covers; and (c) use of foams to cover exposed odorous soils. If odors develop and cannot otherwise be controlled, additional means to eliminate odor nuisances will include: (d) use of chemical odorants in spray or misting systems.

This odor control plan is capable of controlling emissions of nuisance odors. If nuisance odors are identified, work will be halted, and the source of odors will be identified and corrected. Work will not resume until nuisance odors have been abated. NYSDEC will be notified of odor complaint events. Implementation of odor controls will be the responsibility of the contractor.



3.3.2 Dust Control

Dust management during invasive on-site work will include, at a minimum:

- Use of a dedicated water spray methodology for roads, excavation areas and stockpiles.
- Exercise extra care during dry and high-wind periods.
- Use of gravel or RCA on egress and other roadways to provide a clean and dust-free road surface.

This dust control plan is capable of controlling emissions of dust. If nuisance dust emissions are identified, work will be halted, and the source of dusts will be identified and corrected. Work will not resume until nuisance dust emissions have been abated. NYSDEC will be notified of dust complaint events. Implementation of dust controls will be the responsibility of the contractor.

3.4 Special Requirements for Work Within 20 Feet of Potentially Exposed Individuals or Structures

When work areas are within 20 feet of potentially exposed populations or occupied structures, the continuous monitoring locations for VOCs and particulates must reflect the nearest potentially exposed individuals and the location of ventilation system intakes for nearby structures. The use of engineering controls such as vapor/dust barriers, temporary negative-pressure enclosures, or special ventilation devices should be considered to prevent exposures related to the work activities and to control dust and odors. Consideration should be given to implementing the planned activities when potentially exposed populations are at a minimum, such as during weekends or evening hours in non-residential settings.

- If total VOC concentrations opposite the walls of occupied structures or next to intake vents exceed 1 part-per-million, monitoring should occur within the occupied structure(s). Depending upon the nature of contamination, chemical-specific colorimetric tubes of sufficient sensitivity may be necessary for comparing the exposure point concentrations with appropriate predetermined response levels (response actions should also be pre-determined). Background readings in the occupied spaces must be taken prior to commencement of the planned work. Any unusual background readings should be discussed with NYSDOH prior to commencement of the work.
- If total particulate concentrations opposite the walls of occupied structures or next to intake vents exceed 150 micrograms per cubic meter, work activities should be suspended until controls are implemented and are successful in reducing the total particulate concentration to 150 micrograms per cubic meter or less at the monitoring point.



 Depending upon the nature of contamination and remedial activities, other parameters (e.g., explosivity, oxygen, hydrogen sulfide, carbon monoxide) may also need to be monitored.
 Response levels and actions should be pre-determined, as necessary, for each site.



4.0 RECORD KEEPING

Copies of the CAMP monitoring logs for VOCs and dust particulates will be provided in the applicable report documenting the work activities conducted. If odor or dust suppression techniques were required, they will also be documented in the report.