

## SOIL VAPOR INTRUSION EVALUATION WORK PLAN

**Site Name:** Former Anglo Chemical and Rubber Site

**Site Address:** 1-9 Wythe Avenue  
Brooklyn, New York

**BCP Site Number:** C224337

**Report Date:** March 18, 2026

**Prepared For:**

One Wythe LLC  
329 Hewes Street, 3<sup>rd</sup> Floor  
Brooklyn, New York 11211

**Table of Contents**

**CERTIFICATION ..... ii**

**1.0 INTRODUCTION ..... 2**

**2.0 SITE BACKGROUND..... 3**

    2.1 Site Location and Description ..... 3

    2.2 Description of Surrounding Property ..... 3

    2.3 Site Topography, Geology, and Hydrogeology ..... 3

**3.0 SOIL VAPOR INTRUSION EVALUATION ..... 4**

    3.1 Pre-Sampling Inspection..... 4

    3.2 Sampling Procedure ..... 4

**4.0 QUALITY CONTROL/QUALITY ASSURANCE (QA/QC)..... 6**

    4.1 Data Submittal..... 6

    4.2 Data Validation ..... 6

**5.0 HEALTH AND SAFETY PLAN (HASP) ..... 7**

**6.0 REPORTING ..... 8**

**7.0 SCHEDULE ..... 9**

**FIGURES**

- FIGURE 1: SITE LOCATION MAP
- FIGURE 2: PROPOSED SAMPLING PLAN

**APPENDICES**

- APPENDIX A: NYSDOH INDOOR AIR QUALITY QUESTIONNAIRE AND BUILDING INVENTORY FORM
- APPENDIX B: QUALITY ASSURANCE PROJECT PLAN (QAPP)
- APPENDIX C: HEALTH AND SAFETY PLAN (HASP)

**CERTIFICATION**

I, Hilmi U. Aydin, certify that I am currently a Qualified Environmental Professional as defined in 6 New York Codes, Rules, and Regulations (NYCRR) Part 375 and that this Soil Vapor Intrusion Evaluation Work Plan was prepared in accordance with all applicable statutes and regulations and in substantial conformance with the Division of Environmental Remediation (DER) Technical Guidance for Site Investigation and Remediation (DER-10).



---

Hilmi U. Aydin, P.E., QEP  
Principal Engineer

## **1.0 INTRODUCTION**

This Soil Vapor Intrusion (SVI) Evaluation Work Plan was prepared on behalf of One Wythe LLC (the Applicant) to evaluate the indoor air conditions at 1-9 Wythe Avenue in Brooklyn, New York (the Site) prior to building occupancy.

The purpose of this SVI Evaluation Work Plan is to document the post-remedial indoor air quality prior to occupancy of the building. The sampling event will be performed during the heating season prior to building occupancy as required by the NYSDEC and the New York State Department of Health (NYSDOH) per the Site Management Plan dated February 2025. This SVI Evaluation Work Plan was prepared in accordance with the regulations and guidance applicable to the BCP, the NYSDEC Division of Environmental Remediation (DER) Program Policy: Technical Guidance for Site Investigation and Remediation (DER-10); and the NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October 2006, with updates.

The study will include the sampling and analysis of indoor air and outdoor air samples at the Site.

## **2.0 SITE BACKGROUND**

### **2.1 Site Location and Description**

The Site is located on the south side of Wythe Avenue between Banker Street and North 15<sup>th</sup> Street approximately 800 feet east of the East River. The Site consists of one tax lot that is approximately 16,652-square feet (0.3822 acres). The legal description of the subject property is Block 2641 and Lot 4. The Site is currently improved with a seven-story mixed commercial and industrial building with a full cellar. The cellar includes a bike room, locker rooms, and storage. The first floor includes storage, industrial space, and a loading dock. The second through seventh floors include offices. A Site Location Map is provided as Figure 1.

### **2.2 Description of Surrounding Property**

The Site is bounded by a vacant lot to the north beyond Wythe Avenue, three one-story industrial use buildings and a vacant lot to the east across Banker Street, one single-story and one two-story industrial use buildings to the west across North 15<sup>th</sup> Street, and intersection of North 15<sup>th</sup> Street and Banker Street to the south.

The nearest ecological receptor is the East River located approximately 0.15-miles west of the Site. Other sensitive receptors, as defined in DER-10, within 500-feet of the Site include:

- Ardor School at 25 Nassau Avenue

Public storm drains and sewers are located within the existing streets on each side of the Site.

### **2.3 Site Topography, Geology, and Hydrogeology**

According to the United States Geological Survey (USGS) Topographic Quadrangle for “Brooklyn, New York” dated 2023, the Site is located at approximately 15 feet above mean sea level (MSL). It is located within the Atlantic Coastal Plain physiographic province, which represents the end or terminal moraines of a glacier and the associated outwash aprons beyond the moraine. The Site was excavated to native clay layer during the remedial action.

The average depth to groundwater was determined as approximately 7 feet bgs or el. 1.79 to 3.05 feet North American Vertical Datum 1988 (NAVD88) during the remedial investigation. During our recent quarterly sampling events, groundwater is identified between 6.75 and 9.38 feet bgs. Groundwater beneath the Site generally flows towards the East River to the east of the Site.

### 3.0 SOIL VAPOR INTRUSION EVALUATION

An SVI evaluation proposed herein will be conducted in the new building to evaluate the indoor air quality in the new building prior to occupancy.

The proposed scope of work for the SVI evaluation is as follows:

- Pre-sampling inspection of the new building,
- Collection of three indoor air samples (26IA-1 through 26IA-3) in the cellar,
- Collection of two indoor air samples (26IA-4 and 26IA-5) on the 1<sup>st</sup> floor, and
- Collection of one outdoor ambient air sample (26OA-1) at an upwind location.

The sampling will be used to confirm that the indoor air quality of the building is safe for potential building occupants and that indoor air concentrations are consistent with the New York State Department of Health (NYSDOH) Soil Vapor Intrusion Guidance values. If results indicate monitoring or mitigate concentrations on the NYSDOH Decision Matrices, a Corrective Measure Workplan will be submitted to NYSDEC for review.

If modifications to the scope of work are required due to site conditions, the NYSDEC and NYSDOH project managers will be notified. All deviations will be reported in the SVI Evaluation Report.

Figure 2 provides the Proposed Sampling Plan.

#### 3.1 Pre-Sampling Inspection

A pre-sampling inspection will be conducted prior to sampling events to evaluate the building floor layout, air flows, storage or use of volatile organic compounds (VOCs), and physical conditions of the building prior to testing. A photoionization detector (PID) will be utilized to identify potential sources of VOCs in the building. NYSDOH Indoor Air Quality Questionnaire and Building Inventory Form will be completed to document the existing conditions and chemical inventories. The NYSDOH Indoor Air Quality Questionnaire and Building Inventory Form to be completed is attached as Appendix A.

#### 3.2 Sampling Procedure

Five indoor air samples (26IA-1 through 26IA-5) and one upwind exterior ambient air sample (26OA-1) will be collected at approximately 3-5 feet above the ground to represent typical breathing zone. Samples will be collected for laboratory analysis utilizing 6-liter SUMMA canisters fitted with 8-hour flow controllers set not to exceed 0.2 liters per minute, as established by the NYSDOH Guidance document.

Upon completion of the sampling event, all canisters will be labeled properly with the sample ID numbers, and vacuum pressure readings in the canisters before and after the sample collection. The vapor samples will then be submitted to a NYSDOH ELAP-certified laboratory, under proper chain of custody procedures to be analyzed for VOCs by EPA Method TO-15.

## **4.0 QUALITY CONTROL/QUALITY ASSURANCE (QA/QC)**

An ambient air sample will be collected as QA/QC during the SVI investigation. A Quality Assurance Project Plan that describes how QA/QC procedures will be implemented during the RI is provided as Appendix B.

### **4.1 Data Submittal**

Analytical results will be provided by a New York State Department of Health (NYSDOH) Environmental Laboratory Approval Program (ELAP) certified laboratory. Data will be supplied in Analytical Services Protocol (ASP) Category B Data Packages, and all results will be provided in accordance with the NYSDEC Environmental Information Management System (EIMS) electronic data deliverable (EDD) format (EQuIS).

### **4.2 Data Validation**

Data validation will be performed in accordance with the EPA validation guidelines for organic and inorganic data review. A Data Usability Summary Report (DUSR) will be prepared by a third-party contractor upon receipt of the analytical laboratory reports. The DUSR will present the results of the data validation, including a summary assessment of laboratory data packages, sample preservation and chain of custody procedures, and a summary assessment of precision, accuracy, representativeness, comparability, and completeness of each analytical method.

## **5.0 HEALTH AND SAFETY PLAN (HASP)**

A Site-specific Health and Safety Plan (HASP) is prepared for this SVI investigation. All field personnel involved in investigation activities will participate in training required under 29 CFR 1910.120, such as 40-hour hazardous waste operator training and annual 8-hour refresher training. Site Safety Officer will be responsible for maintaining workers training records. The Site Safety Coordinator will be Ben Neumann. An emergency contact sheet is included in the Site-specific HASP.

All investigative work performed under this SVI investigation will comply with all applicable health and safety laws and regulations, including OSHA worker safety requirements and HAZWOPER requirements. Site-specific training will be provided to field personnel. Additional safety training may be added depending on the tasks performed.

A copy of the Site-specific Health and Safety Plan is provided as Appendix C.

## **6.0 REPORTING**

Upon receipt of the analytical results, Vektor will prepare an SVI Evaluation Report and will include the following sections:

- Introduction,
- Field methods and observations,
- NYSDOH Indoor Air Quality Questionnaire and Building Inventory,
- Laboratory results,
- Conclusions, and recommendations, where necessary.

Indoor air and ambient air samples will be compared to the NYSDOH Decision Matrices included in the Guidance for Evaluating Soil Vapor Intrusion in the State of New York, 2006 with updates and the NYSDOH Air Guideline Values. Results will be evaluated to determine if the quality of indoor air in the building is safe for potential occupants.

The report will also include scaled sampling plans showing all sample locations and exceedances, field logs, summary tables with comparison to respective standards, laboratory results, and a Qualitative Human Health Exposure Assessment in accordance with DER-10 (Appendix 3B) as appendices. All results will be provided in accordance with the NYSDEC EIMS EDD format (EQuIS).


**7.0 SCHEDULE**

The SVI investigation will be implemented during the 2026 heating season upon approval of this Work Plan by the NYSDEC and NYSDOH. The table below shows the anticipated schedule for completing the investigation:

Task	Schedule
NYSDEC & NYSDOH Approval of SVI Evaluation Work Plan	March 2026
Mobilization & SVI Field Work	March 2026
Laboratory Analysis and Deliverables	April 2026
Submit Draft Results to NYSDEC & NYSDOH	April 2026
Data Validation	April-May 2026
SVI Evaluation Report Submittal to NYSDEC & NYSDOH	May 2026

## FIGURES

---

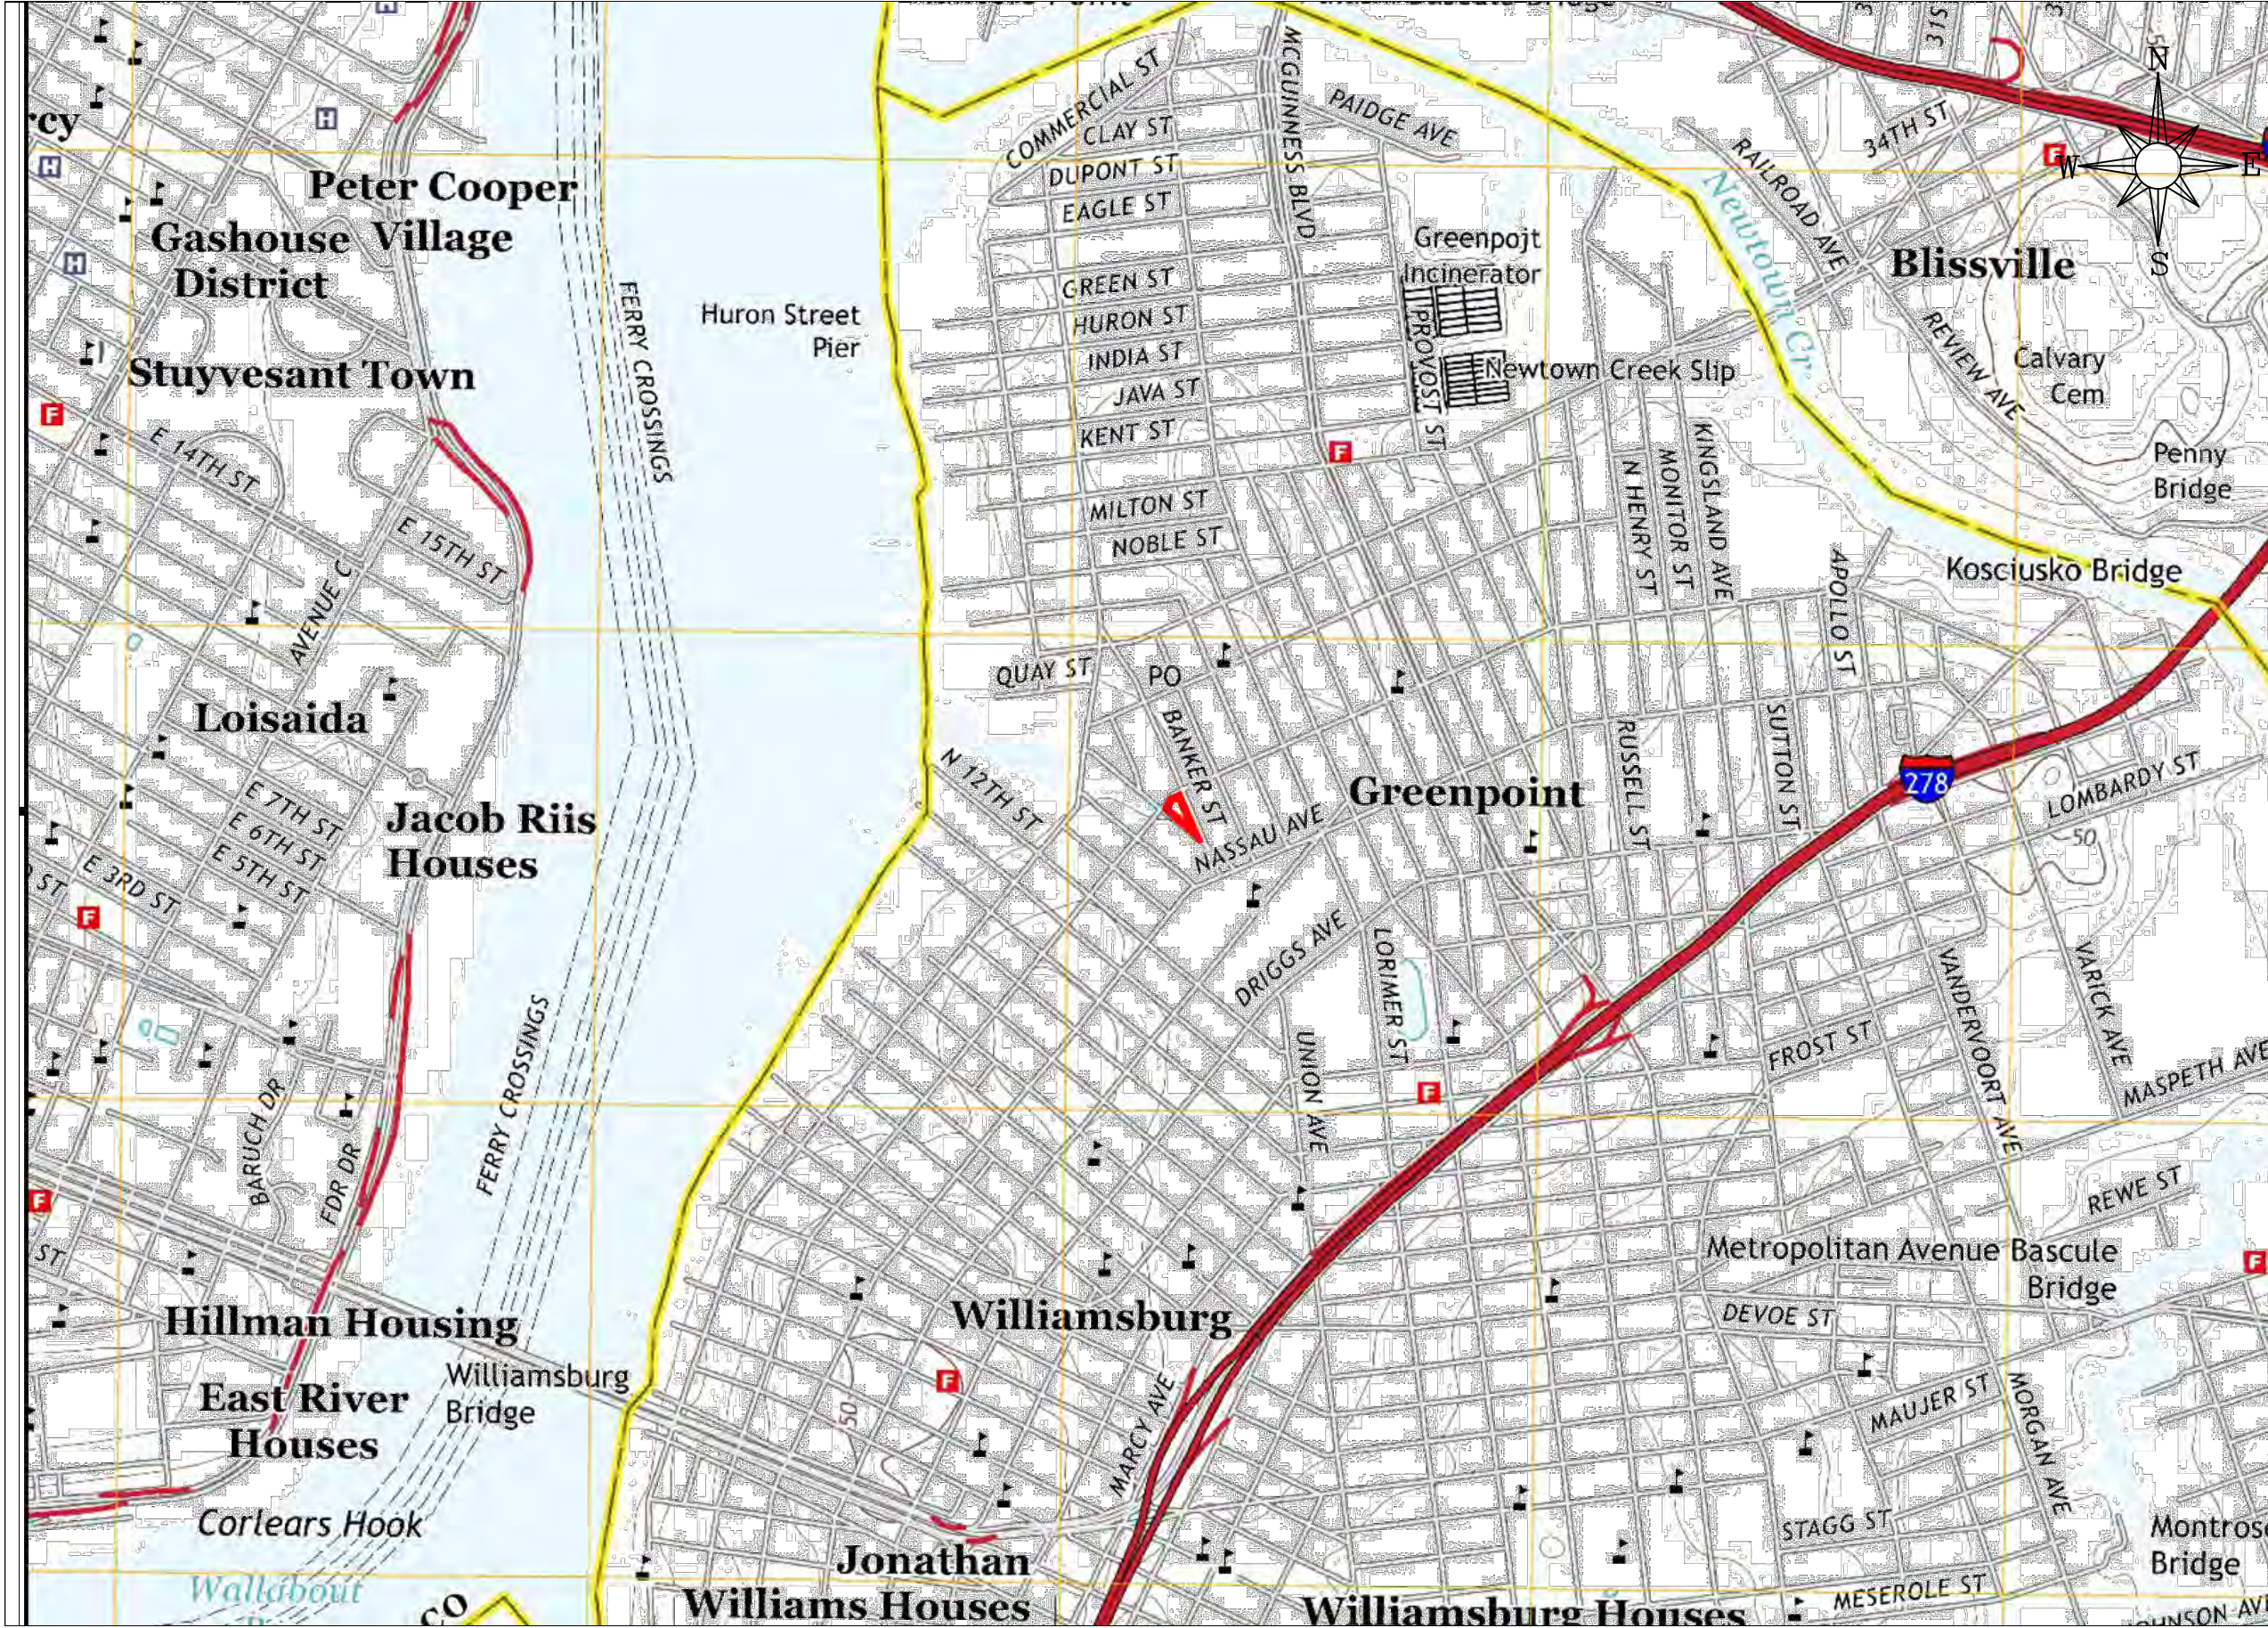

**vEktor consultants**

t: +1.347.871.0750  
 f: +1.347.402.7735  
 e: info@vektorconsultants.com  
 www.vektorconsultants.com

Legend:  
 Approximate BCP Site Location

Base Map provided by Environmental Data Resources - United Geological Survey 7.5 Minute Series Brooklyn Quadrangle 2013

Scale:

Figure No. 1

Figure Name: SITE LOCATION MAP


Report: SVIWP

Date: 3/18/2026

Drawn By: BN

Site Name: FORMER ANGLO CHEMICAL AND RUBBER SITE (C224337)

Site Address: 1-9 WYTHE AVENUE  
 BROOKLYN, NY 11249

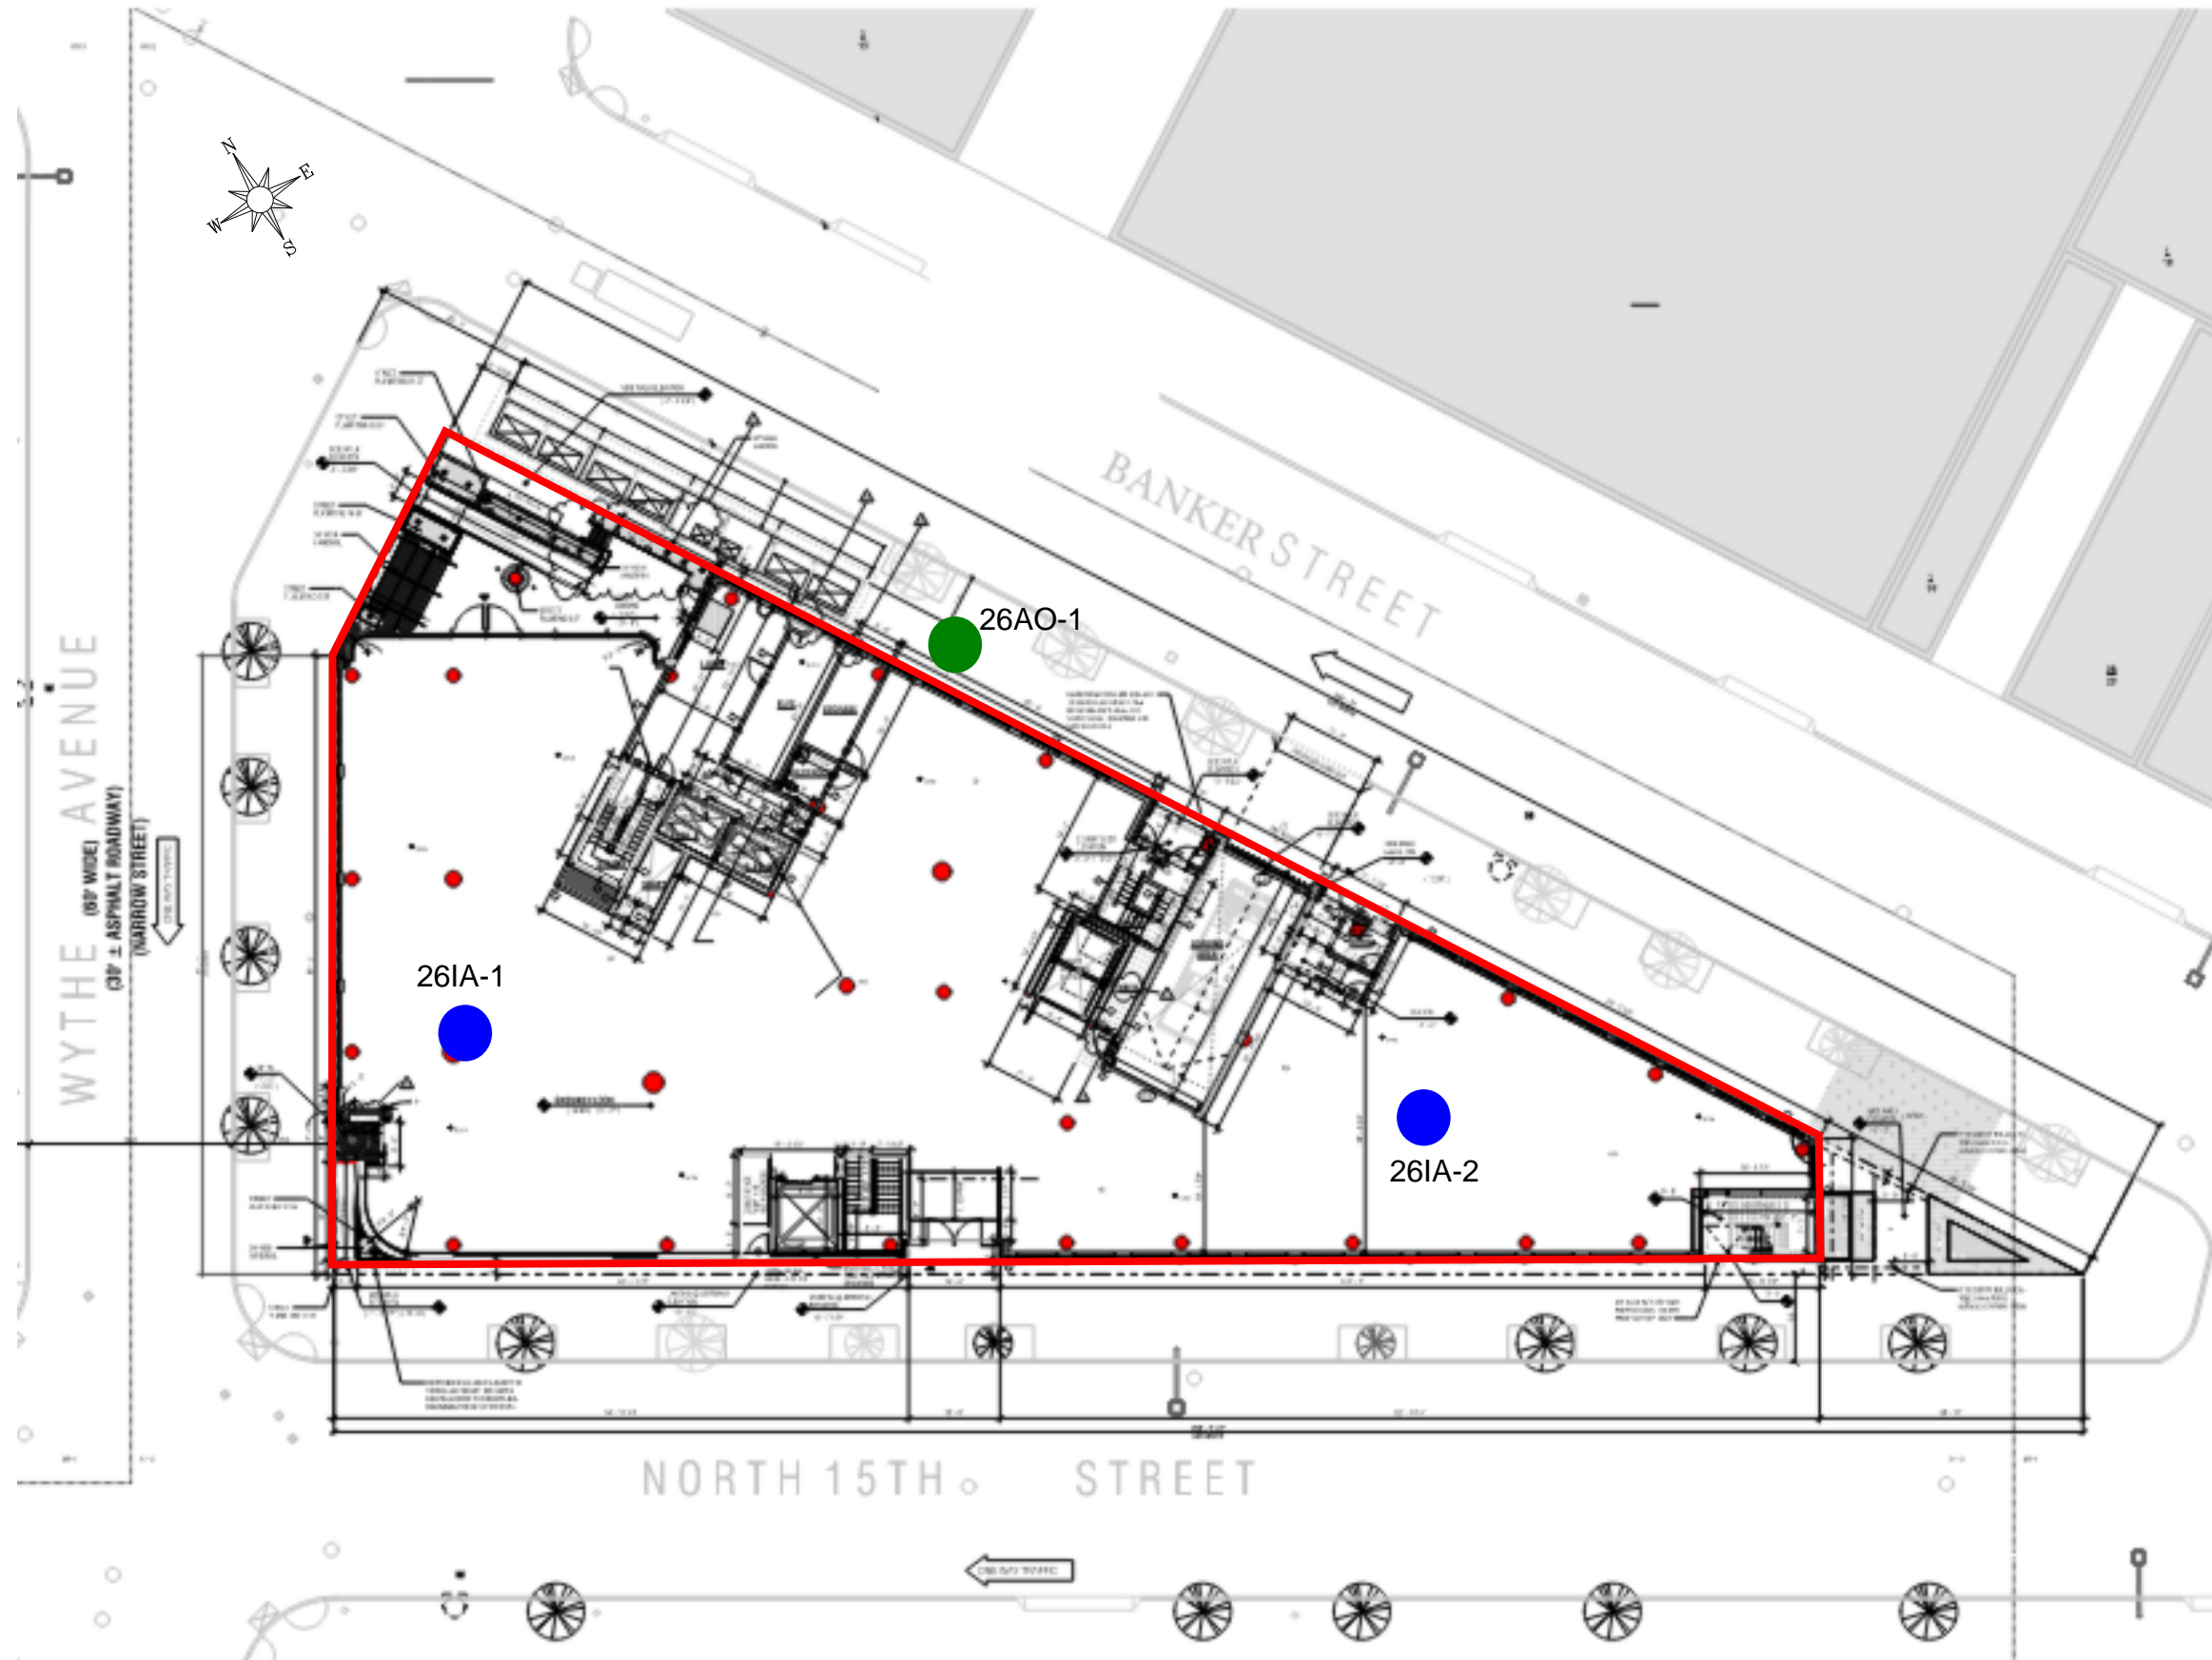

# vEktor consultants

t: +1.347.871.0750  
 f: +1.347.402.7735  
 e: info@vektorconsultants.com  
 www.vektorconsultants.com

### Legend:

- SITE BOUNDARY
- PROPOSED GROUND FLOOR INDOOR AIR SAMPLING LOCATIONS
- PROPOSED AMBIENT AIR SAMPLING LOCATION

### Notes:

1. Basemap provided by StudioSC Architecture PLLC A-101.03

### Scale:



Figure No. 2A

Figure Name: PROPOSED GROUND FLOOR SAMPLING PLAN

Report: SVIWP

Date: 3/19/2026



Drawn By: BN

Site Address: 1-9 WYTHE AVENUE  
 BROOKLYN, NY 11249

# vEktor consultants

t: +1.347.871.0750  
f: +1.347.402.7735  
e: info@vektorconsultants.com  
www.vektorconsultants.com

### Legend:

-  SITE BOUNDARY
-  PROPOSED CELLAR INDOOR AIR SAMPLING LOCATIONS

### Notes:

1. Basemap provided by StudioSC Architecture PLLC A-100.03

### Scale:



Figure No. 2B


Figure Name: PROPOSED CELLAR SAMPLING PLAN

Report: SVIWP

Date: 3/19/2026

Drawn By: BN

Site Address: 1-9 WYTHE AVENUE  
BROOKLYN, NY 11249

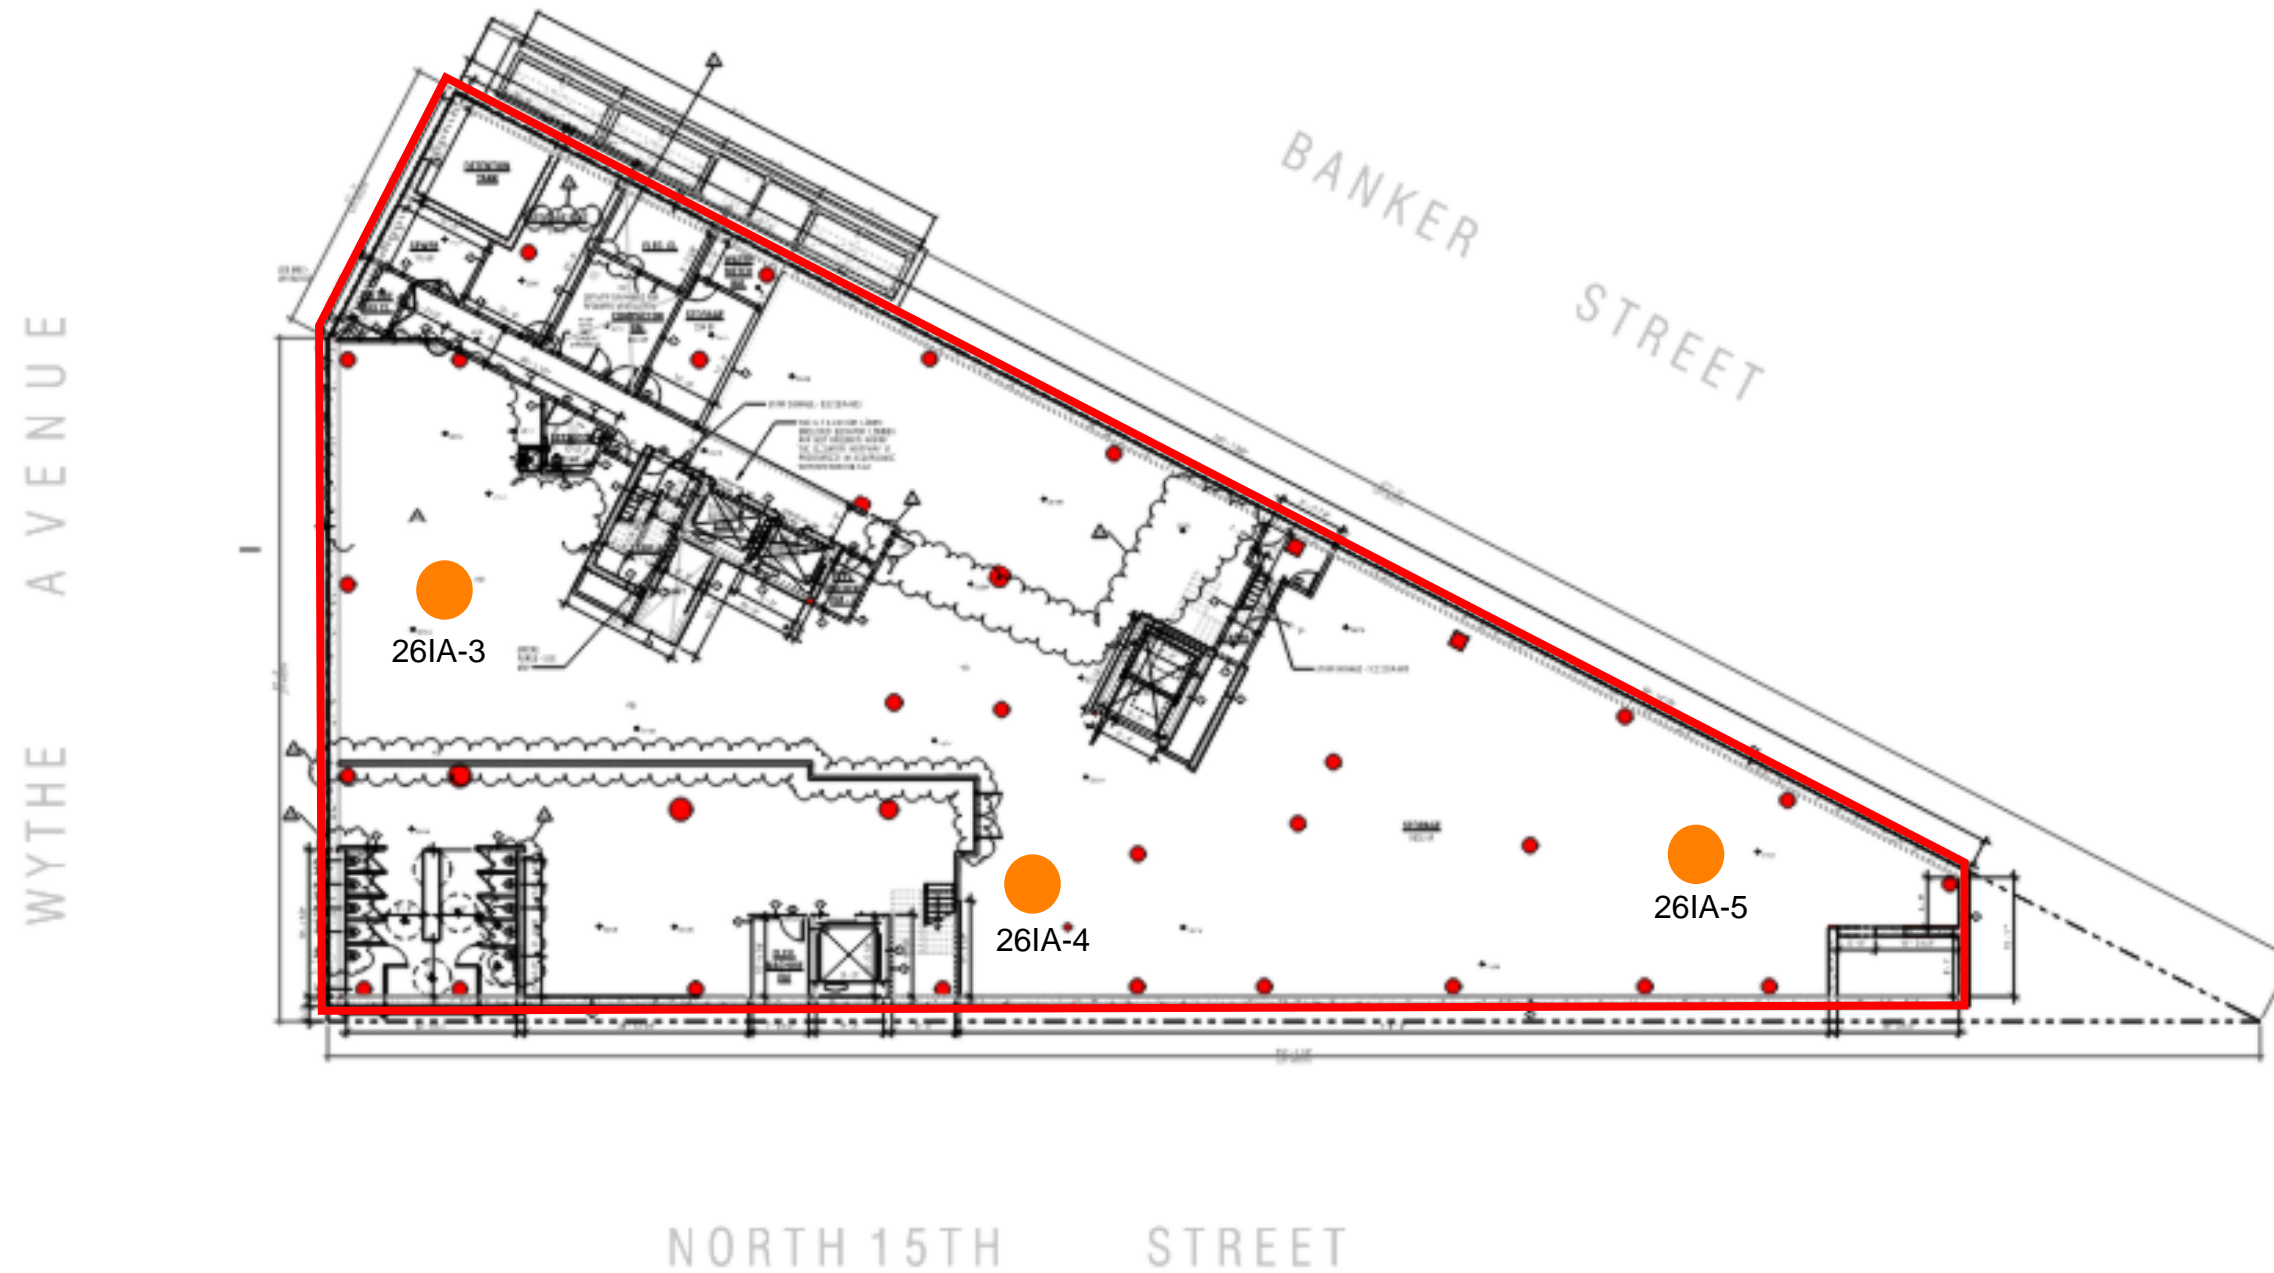

**APPENDICES**

---

**APPENDIX A**

---

**NYSDOH INDOOR AIR QUALITY QUESTIONNAIRE &  
BUILDING INVENTORY FORM**

**NEW YORK STATE DEPARTMENT OF HEALTH  
INDOOR AIR QUALITY QUESTIONNAIRE AND BUILDING INVENTORY  
CENTER FOR ENVIRONMENTAL HEALTH**

This form must be completed for each residence involved in indoor air testing.

Preparer's Name \_\_\_\_\_ Date/Time Prepared \_\_\_\_\_

Preparer's Affiliation \_\_\_\_\_ Phone No. \_\_\_\_\_

Purpose of Investigation \_\_\_\_\_

**1. OCCUPANT:**

**Interviewed:** Y / N

Last Name: \_\_\_\_\_ First Name: \_\_\_\_\_

Address: \_\_\_\_\_

County: \_\_\_\_\_

Home Phone: \_\_\_\_\_ Office Phone: \_\_\_\_\_

Number of Occupants/persons at this location \_\_\_\_\_ Age of Occupants \_\_\_\_\_

**2. OWNER OR LANDLORD:** (Check if same as occupant \_\_\_ )

**Interviewed:** Y / N

Last Name: \_\_\_\_\_ First Name: \_\_\_\_\_

Address: \_\_\_\_\_

County: \_\_\_\_\_

Home Phone: \_\_\_\_\_ Office Phone: \_\_\_\_\_

**3. BUILDING CHARACTERISTICS**

**Type of Building:** (Circle appropriate response)

- |             |        |                      |
|-------------|--------|----------------------|
| Residential | School | Commercial/Multi-use |
| Industrial  | Church | Other: _____         |

**If the property is residential, type?** (Circle appropriate response)

- |              |                 |                   |
|--------------|-----------------|-------------------|
| Ranch        | 2-Family        | 3-Family          |
| Raised Ranch | Split Level     | Colonial          |
| Cape Cod     | Contemporary    | Mobile Home       |
| Duplex       | Apartment House | Townhouses/Condos |
| Modular      | Log Home        | Other: _____      |

**If multiple units, how many?** \_\_\_\_\_

**If the property is commercial, type?**

Business Type(s) \_\_\_\_\_

Does it include residences (i.e., multi-use)? Y / N      If yes, how many? \_\_\_\_\_

**Other characteristics:**

Number of floors \_\_\_\_\_      Building age \_\_\_\_\_

Is the building insulated? Y / N      How air tight? Tight / Average / Not Tight

**4. AIRFLOW**

**Use air current tubes or tracer smoke to evaluate airflow patterns and qualitatively describe:**

Airflow between floors

---

---

---

Airflow near source

---

---

---

Outdoor air infiltration

---

---

---

Infiltration into air ducts

---

---

---

**5. BASEMENT AND CONSTRUCTION CHARACTERISTICS (Circle all that apply)**

- a. Above grade construction: wood frame concrete stone brick
- b. Basement type: full crawlspace slab other \_\_\_\_\_
- c. Basement floor: concrete dirt stone other \_\_\_\_\_
- d. Basement floor: uncovered covered covered with \_\_\_\_\_
- e. Concrete floor: unsealed sealed sealed with \_\_\_\_\_
- f. Foundation walls: poured block stone other \_\_\_\_\_
- g. Foundation walls: unsealed sealed sealed with \_\_\_\_\_
- h. The basement is: wet damp dry moldy
- i. The basement is: finished unfinished partially finished
- j. Sump present? Y / N
- k. Water in sump? Y / N / not applicable

**Basement/Lowest level depth below grade:** \_\_\_\_\_(feet)

**Identify potential soil vapor entry points and approximate size (e.g., cracks, utility ports, drains)**

---



---

**6. HEATING, VENTING and AIR CONDITIONING (Circle all that apply)**

**Type of heating system(s) used in this building: (circle all that apply – note primary)**

- |                     |                  |                     |             |
|---------------------|------------------|---------------------|-------------|
| Hot air circulation | Heat pump        | Hot water baseboard |             |
| Space Heaters       | Stream radiation | Radiant floor       |             |
| Electric baseboard  | Wood stove       | Outdoor wood boiler | Other _____ |

**The primary type of fuel used is:**

- |             |          |          |
|-------------|----------|----------|
| Natural Gas | Fuel Oil | Kerosene |
| Electric    | Propane  | Solar    |
| Wood        | Coal     |          |

**Domestic hot water tank fueled by:** \_\_\_\_\_

**Boiler/furnace located in:** Basement Outdoors Main Floor Other \_\_\_\_\_

**Air conditioning:** Central Air Window units Open Windows None

Are there air distribution ducts present? Y / N

Describe the supply and cold air return ductwork, and its condition where visible, including whether there is a cold air return and the tightness of duct joints. Indicate the locations on the floor plan diagram.

---



---



---



---

**7. OCCUPANCY**

Is basement/lowest level occupied? Full-time Occasionally Seldom Almost Never

**Level** General Use of Each Floor (e.g., familyroom, bedroom, laundry, workshop, storage)

Basement	_____
1 <sup>st</sup> Floor	_____
2 <sup>nd</sup> Floor	_____
3 <sup>rd</sup> Floor	_____
4 <sup>th</sup> Floor	_____

**8. FACTORS THAT MAY INFLUENCE INDOOR AIR QUALITY**

- a. Is there an attached garage? Y / N
- b. Does the garage have a separate heating unit? Y / N / NA
- c. Are petroleum-powered machines or vehicles stored in the garage (e.g., lawnmower, atv, car) Y / N / NA  
Please specify \_\_\_\_\_
- d. Has the building ever had a fire? Y / N When? \_\_\_\_\_
- e. Is a kerosene or unvented gas space heater present? Y / N Where? \_\_\_\_\_
- f. Is there a workshop or hobby/craft area? Y / N Where & Type? \_\_\_\_\_
- g. Is there smoking in the building? Y / N How frequently? \_\_\_\_\_
- h. Have cleaning products been used recently? Y / N When & Type? \_\_\_\_\_
- i. Have cosmetic products been used recently? Y / N When & Type? \_\_\_\_\_

- j. Has painting/staining been done in the last 6 months? Y / N Where & When? \_\_\_\_\_
- k. Is there new carpet, drapes or other textiles? Y / N Where & When? \_\_\_\_\_
- l. Have air fresheners been used recently? Y / N When & Type? \_\_\_\_\_
- m. Is there a kitchen exhaust fan? Y / N If yes, where vented? \_\_\_\_\_
- n. Is there a bathroom exhaust fan? Y / N If yes, where vented? \_\_\_\_\_
- o. Is there a clothes dryer? Y / N If yes, is it vented outside? Y / N
- p. Has there been a pesticide application? Y / N When & Type? \_\_\_\_\_

**Are there odors in the building?** Y / N  
 If yes, please describe: \_\_\_\_\_

**Do any of the building occupants use solvents at work?** Y / N  
 (e.g., chemical manufacturing or laboratory, auto mechanic or auto body shop, painting, fuel oil delivery, boiler mechanic, pesticide application, cosmetologist)

If yes, what types of solvents are used? \_\_\_\_\_

If yes, are their clothes washed at work? Y / N

**Do any of the building occupants regularly use or work at a dry-cleaning service?** (Circle appropriate response)

- Yes, use dry-cleaning regularly (weekly)
- Yes, use dry-cleaning infrequently (monthly or less)
- Yes, work at a dry-cleaning service
- No
- Unknown

**Is there a radon mitigation system for the building/structure?** Y / N Date of Installation: \_\_\_\_\_  
**Is the system active or passive?** Active/Passive

**9. WATER AND SEWAGE**

**Water Supply:** Public Water Drilled Well Driven Well Dug Well Other: \_\_\_\_\_  
**Sewage Disposal:** Public Sewer Septic Tank Leach Field Dry Well Other: \_\_\_\_\_


**10. RELOCATION INFORMATION (for oil spill residential emergency)**

- a. Provide reasons why relocation is recommended: \_\_\_\_\_
- b. Residents choose to: remain in home relocate to friends/family relocate to hotel/motel
- c. Responsibility for costs associated with reimbursement explained? Y / N
- d. Relocation package provided and explained to residents? Y / N


**11. FLOOR PLANS**

**Draw a plan view sketch of the basement and first floor of the building. Indicate air sampling locations, possible indoor air pollution sources and PID meter readings. If the building does not have a basement, please note.**

**Basement:**

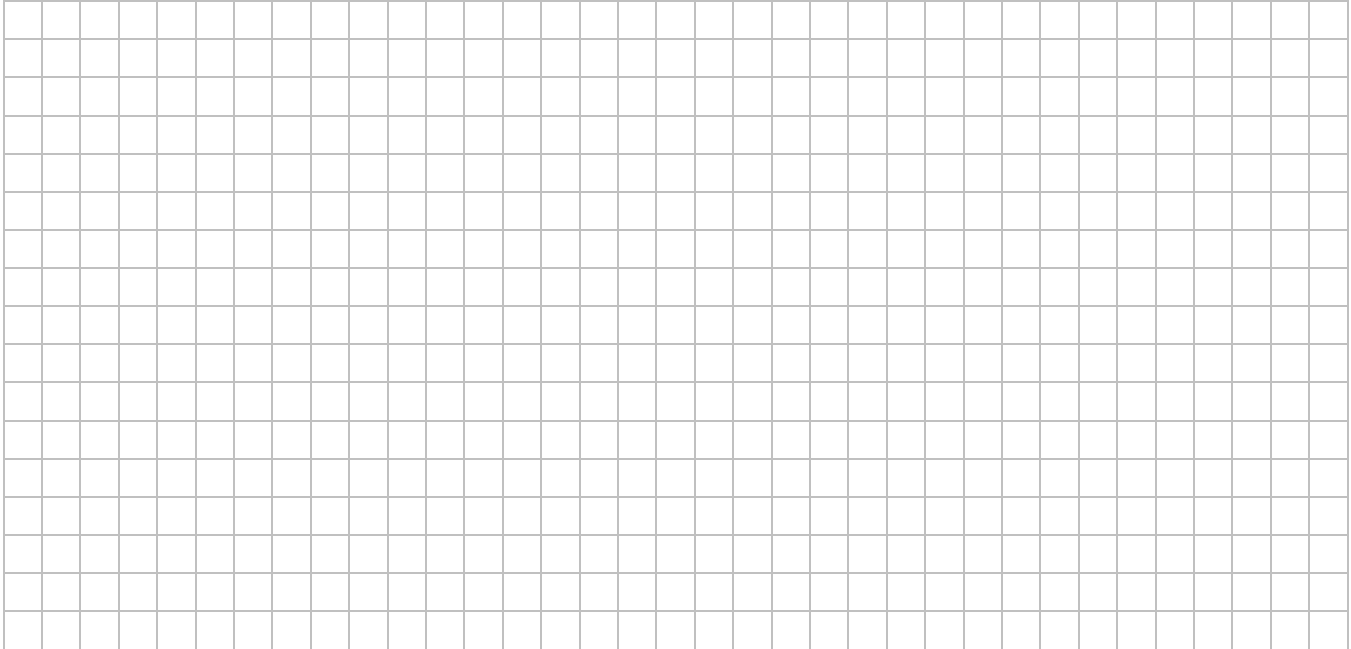


**First Floor:**

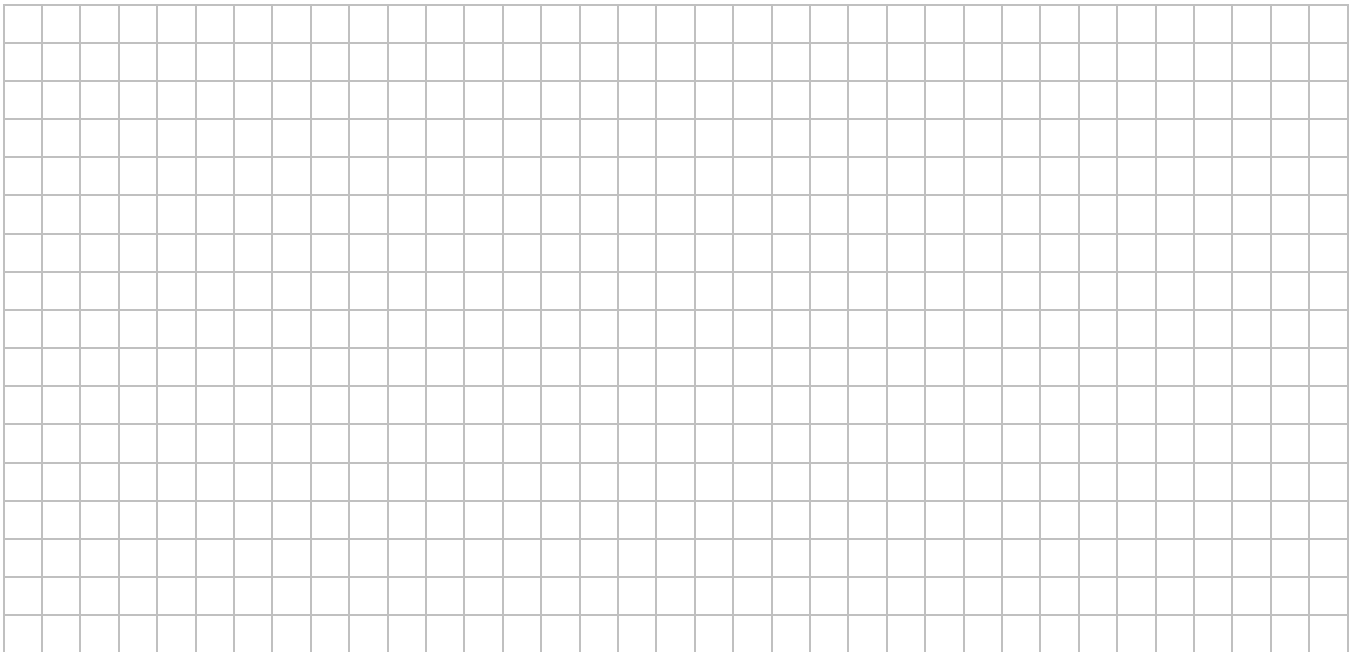

**12. OUTDOOR PLOT**

**Draw a sketch of the area surrounding the building being sampled. If applicable, provide information on spill locations, potential air contamination sources (industries, gas stations, repair shops, landfills, etc.), outdoor air sampling location(s) and PID meter readings.**

**Also indicate compass direction, wind direction and speed during sampling, the locations of the well and septic system, if applicable, and a qualifying statement to help locate the site on a topographic map.**

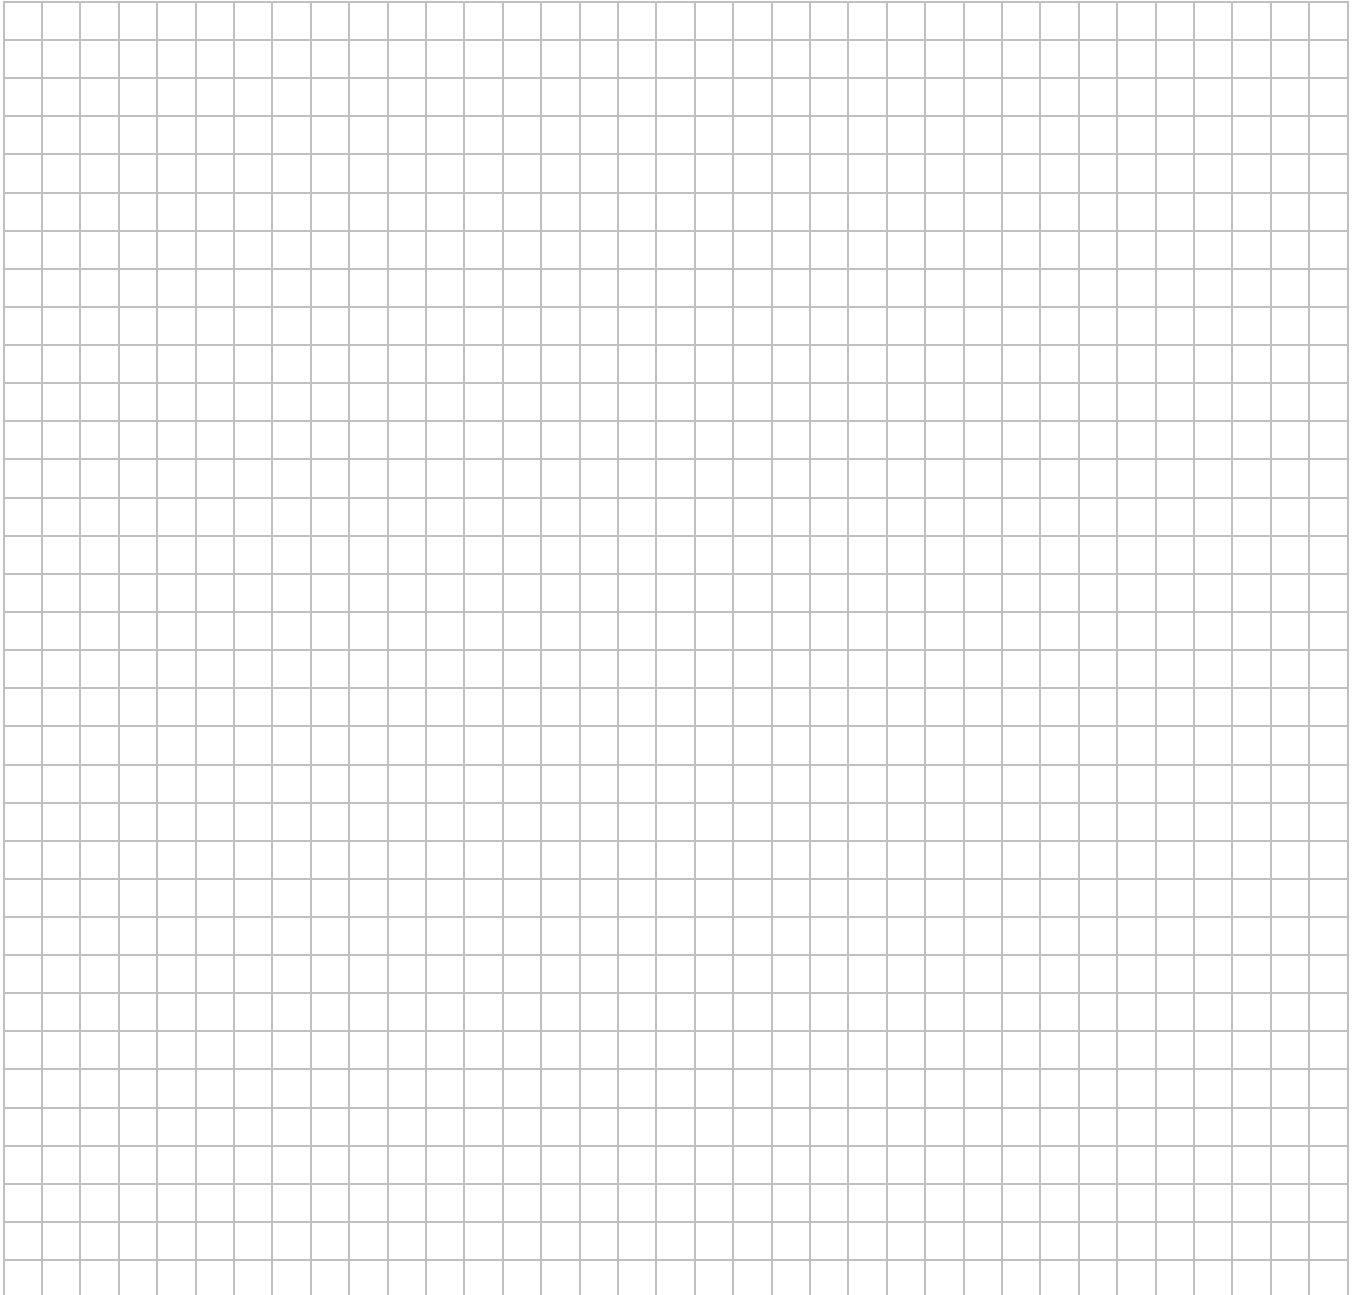



**APPENDIX B**

---

**QUALITY ASSURANCE PROJECT PLAN**

## QUALITY ASSURANCE PROJECT PLAN

**Prepared For:** One Wythe LLC  
**Site Name:** Former Anglo Chemical and Rubber Site  
**Site Location:** 1-9 Wythe Avenue, Brooklyn, New York  
**Date:** March 2026

## Table of Contents

<b>1.0</b>	<b>INTRODUCTION</b> .....	<b>2</b>
1.1	Scope of Work .....	2
<b>2.0</b>	<b>PROJECT TEAM</b> .....	<b>2</b>
2.1	Principal Engineer .....	2
2.2	Project Director .....	2
2.3	Project Manager .....	2
2.4	Field Leader .....	2
2.5	Laboratory Quality Assurance/Quality Control Officer .....	3
2.6	Third-Party Data Validator .....	3
<b>3.0</b>	<b>SAMPLING METHODS PROCEDURES</b> .....	<b>4</b>
3.1	Pre-Sampling Inspection.....	4
3.2	Sampling Procedure .....	4
3.3	Quality Assurance (QA)/ Quality Control (QC) Sampling .....	4
3.4	Field Instrumentation .....	4
<b>4.0</b>	<b>DECONTAMINATION</b> .....	<b>5</b>
4.1	Investigation Derived Waste .....	5

### Tables

Table 1: Proposed Samples Summary

### Figures

Figure 1: Proposed Sampling Plan

### Attachments

Attachment 1: Chain of Custody Examples

Attachment 2: Resumes

## 1.0 INTRODUCTION

This Quality Assurance Project Plan (QAPP) has been prepared on behalf of One Wythe LLC (the Applicant) for the implementation of a Soil Vapor Intrusion (SVI) Evaluation Work Plan by Vektor Consultants (Vektor) at 1-9 Wythe Avenue in Brooklyn, New York (the Site).

The investigation activities will be conducted in accordance with a New York State Department of Environmental Conservation (NYSDEC) and New York State Department of Health (NYSDOH) approved Soil Vapor Intrusion Evaluation Work Plan.

This QAPP describes the protocols and procedures to be followed during the implementation of the NYSDEC approved work plan. This QAPP was prepared in accordance with the NYSDEC DER-10 Technical Guidance for Site Investigation and Remediation.

### 1.1 Scope of Work

An SVI evaluation proposed herein will be conducted in the new building to establish baseline concentrations of volatile organic compounds (VOCs) in indoor air prior to building occupancy.

The proposed scope of work for the SVI evaluation is as follows:

- Pre-sampling inspection of the new building,
- Collection of three indoor air samples (26IA-1 through 26IA-3) in the cellar.
- Collection of two indoor air samples (26IA-4 and 26IA-5) on the 1<sup>st</sup> floor.
- Collection of one outdoor ambient air sample (26OA-1) at an upwind location.

## 2.0 PROJECT TEAM

Vektor’s team of trained and experienced environmental scientists, geologists, and engineers along with Vektor’s licensed subcontractors will perform the below-listed tasks in a manner consistent with DER-10 Technical Guidance for Site Investigation and Remediation (DER-10).

Principal Engineer, P.E.	Hilmi U. Aydin	Hilmi U. Aydin, P.E.
Project Director, QEP	Ezgi Karayel	Vektor Consultants
Project Manager	Ben Neumann	Vektor Consultants
Field Leader	Spencer Berlin	Vektor Consultants
Laboratory QA/QC Officer	Sarah Widomski	York Analytical Laboratories, Inc.
Third-party Data Validator	Don Anne	Alpha Geoscience

### 2.1 Principal Engineer

Hilmi U. Aydin, Professional Engineer, will act as the Principal Engineer and will oversee the successful completion of this project. He will have the direct responsibility of preparation and certification of the SVI Evaluation Report.

### 2.2 Project Director

Ezgi Karayel, Qualified Environmental Professional, will act as the Project Director and Quality Assurance/Quality Control (QA/QC) officer and will ensure the successful completion of the SVI investigation.

### 2.3 Project Manager

Ben Neumann will act as the Project Manager. He will oversee the field activities and coordinate for all elements of the SVI investigation. He will be responsible for coordinating with the field leader and other field crew as necessary.

### 2.4 Field Leader

Spencer Berlin of Vektor will lead the field activities and ensure implementation of Health and Safety Plan (HASP) during all field work. He has the authority to stop all work if unsafe conditions are observed. He will be responsible for coordinating with all subcontractors. He will oversee the subcontractors in the field and collect samples outlined in the work plan and in this QAPP.

**2.5 Laboratory Quality Assurance/Quality Control Officer**

Laboratory analysis will be completed by York Analytical Laboratories, Inc. (York) of Stratford, CT. York is a New York State Department of Health (NYSDOH) Environmental Laboratory Accreditation Program (ELAP) certified laboratory (NY Cert. Number 10854 and 12058). Lea Sherman is the Client Manager who will ensure that all summa canisters and chain of custodies are properly packaged and shipped. QA/QC Officer is Jason Hebert who will ensure that quality assurance procedures are followed. Quality Assurance requirements for analytical laboratory data include accuracy, precision, sensitivity, representativeness, and completeness. Data will be supplied in Analytical Services Protocol (ASP) Category B Data Packages.

**2.6 Third-Party Data Validator**

Don Anne of Alpha Geoscience will be the third-party validator. Data validation will be performed in accordance with the EPA validation guidelines for organic and inorganic data review. A Data Usability Summary Report (DUSR) will be prepared by Don Anne upon receipt of the analytical laboratory reports. The DUSR will present the results of the data validation, including a summary assessment of laboratory data packages, sample preservation and chain of custody procedures, and a summary assessment of precision, accuracy, representativeness, comparability, and completeness of each analytical method.

### **3.0 SAMPLING METHODS PROCEDURES**

This section describes the field protocol and procedures to be followed during the SVI investigation.

Table 1 provides a copy of the sampling summary. Figure 1 provides a copy of the proposed sampling plan.

#### **3.1 Pre-Sampling Inspection**

A pre-sampling inspection will be conducted prior to sampling event(s) to evaluate the building floor layout, air flows, storage or use of volatile organic compounds (VOCs), and physical conditions of the building prior to testing. A photoionization detector (PID) will be utilized to identify potential sources of VOCs in the building. NYSDOH Indoor Air Quality Questionnaire and Building Inventory Form will be completed to document the existing conditions and chemical inventories.

#### **3.2 Sampling Procedure**

Indoor air samples and one upwind exterior ambient air sample will be collected at approximately 3-5 feet above the ground to represent typical breathing zone. Samples will be collected for laboratory analysis utilizing 6-liter SUMMA canisters fitted with 24-hour flow controllers set not to exceed 0.2 liters per minute, as established by the NYSDOH Guidance document.

Upon completion of the sampling event, all canisters will be labeled properly with the sample ID numbers, and vacuum pressure readings in the canisters before and after the sample collection. The vapor samples will then be submitted to a NYSDOH ELAP-certified laboratory, under proper chain of custody procedures to be analyzed for VOCs by EPA Method TO-15.

#### **3.3 Quality Assurance (QA)/ Quality Control (QC) Sampling**

The accuracy, precision and completeness of the samples will be addressed by the certified laboratory for all data generated. One upwind ambient air sample will be collected during the SVI. All air samples will be collected in one day (over 24 hours).

#### **3.4 Field Instrumentation**

The field instruments such as PID to be used during the SVI investigation will be calibrated at the beginning of each day as per the manufacturers' specifications. Calibration records will be recorded in the field book.

## **4.0 DECONTAMINATION**

All sampling equipment will be dedicated disposable tools and won't require decontamination.

### **4.1 Investigation Derived Waste**

No significant investigation derived waste is expected to be generated during the SVI investigation. Disposable sampling equipment, including gloves and tubing, will be placed in heavy-duty plastic bags and disposed of properly.

## TABLES


---

**Table 1**  
**Proposed Sampling Rationale and Summary**  
**SVI Evaluation**

<b>Media</b>	<b>Sample ID</b>	<b>Sample Interval</b>	<b>Rationale</b>	<b>Analytical Parameters</b>
Indoor Air	26IA-1	Cellar, 3 to 5 feet above the floor	To evaluate indoor air quality and potential for vapor intrusion	
	26IA-2			
	26IA-3			
	26IA-4	Ground Floor, 3 to 5 feet above the floor		
	26IA-5			
Outdoor Ambient Air	260A-1	3 to 5 feet above the floor on the corner of Wythe Avenue and Banker Street	QA/QC and background conditions	

## FIGURES

---

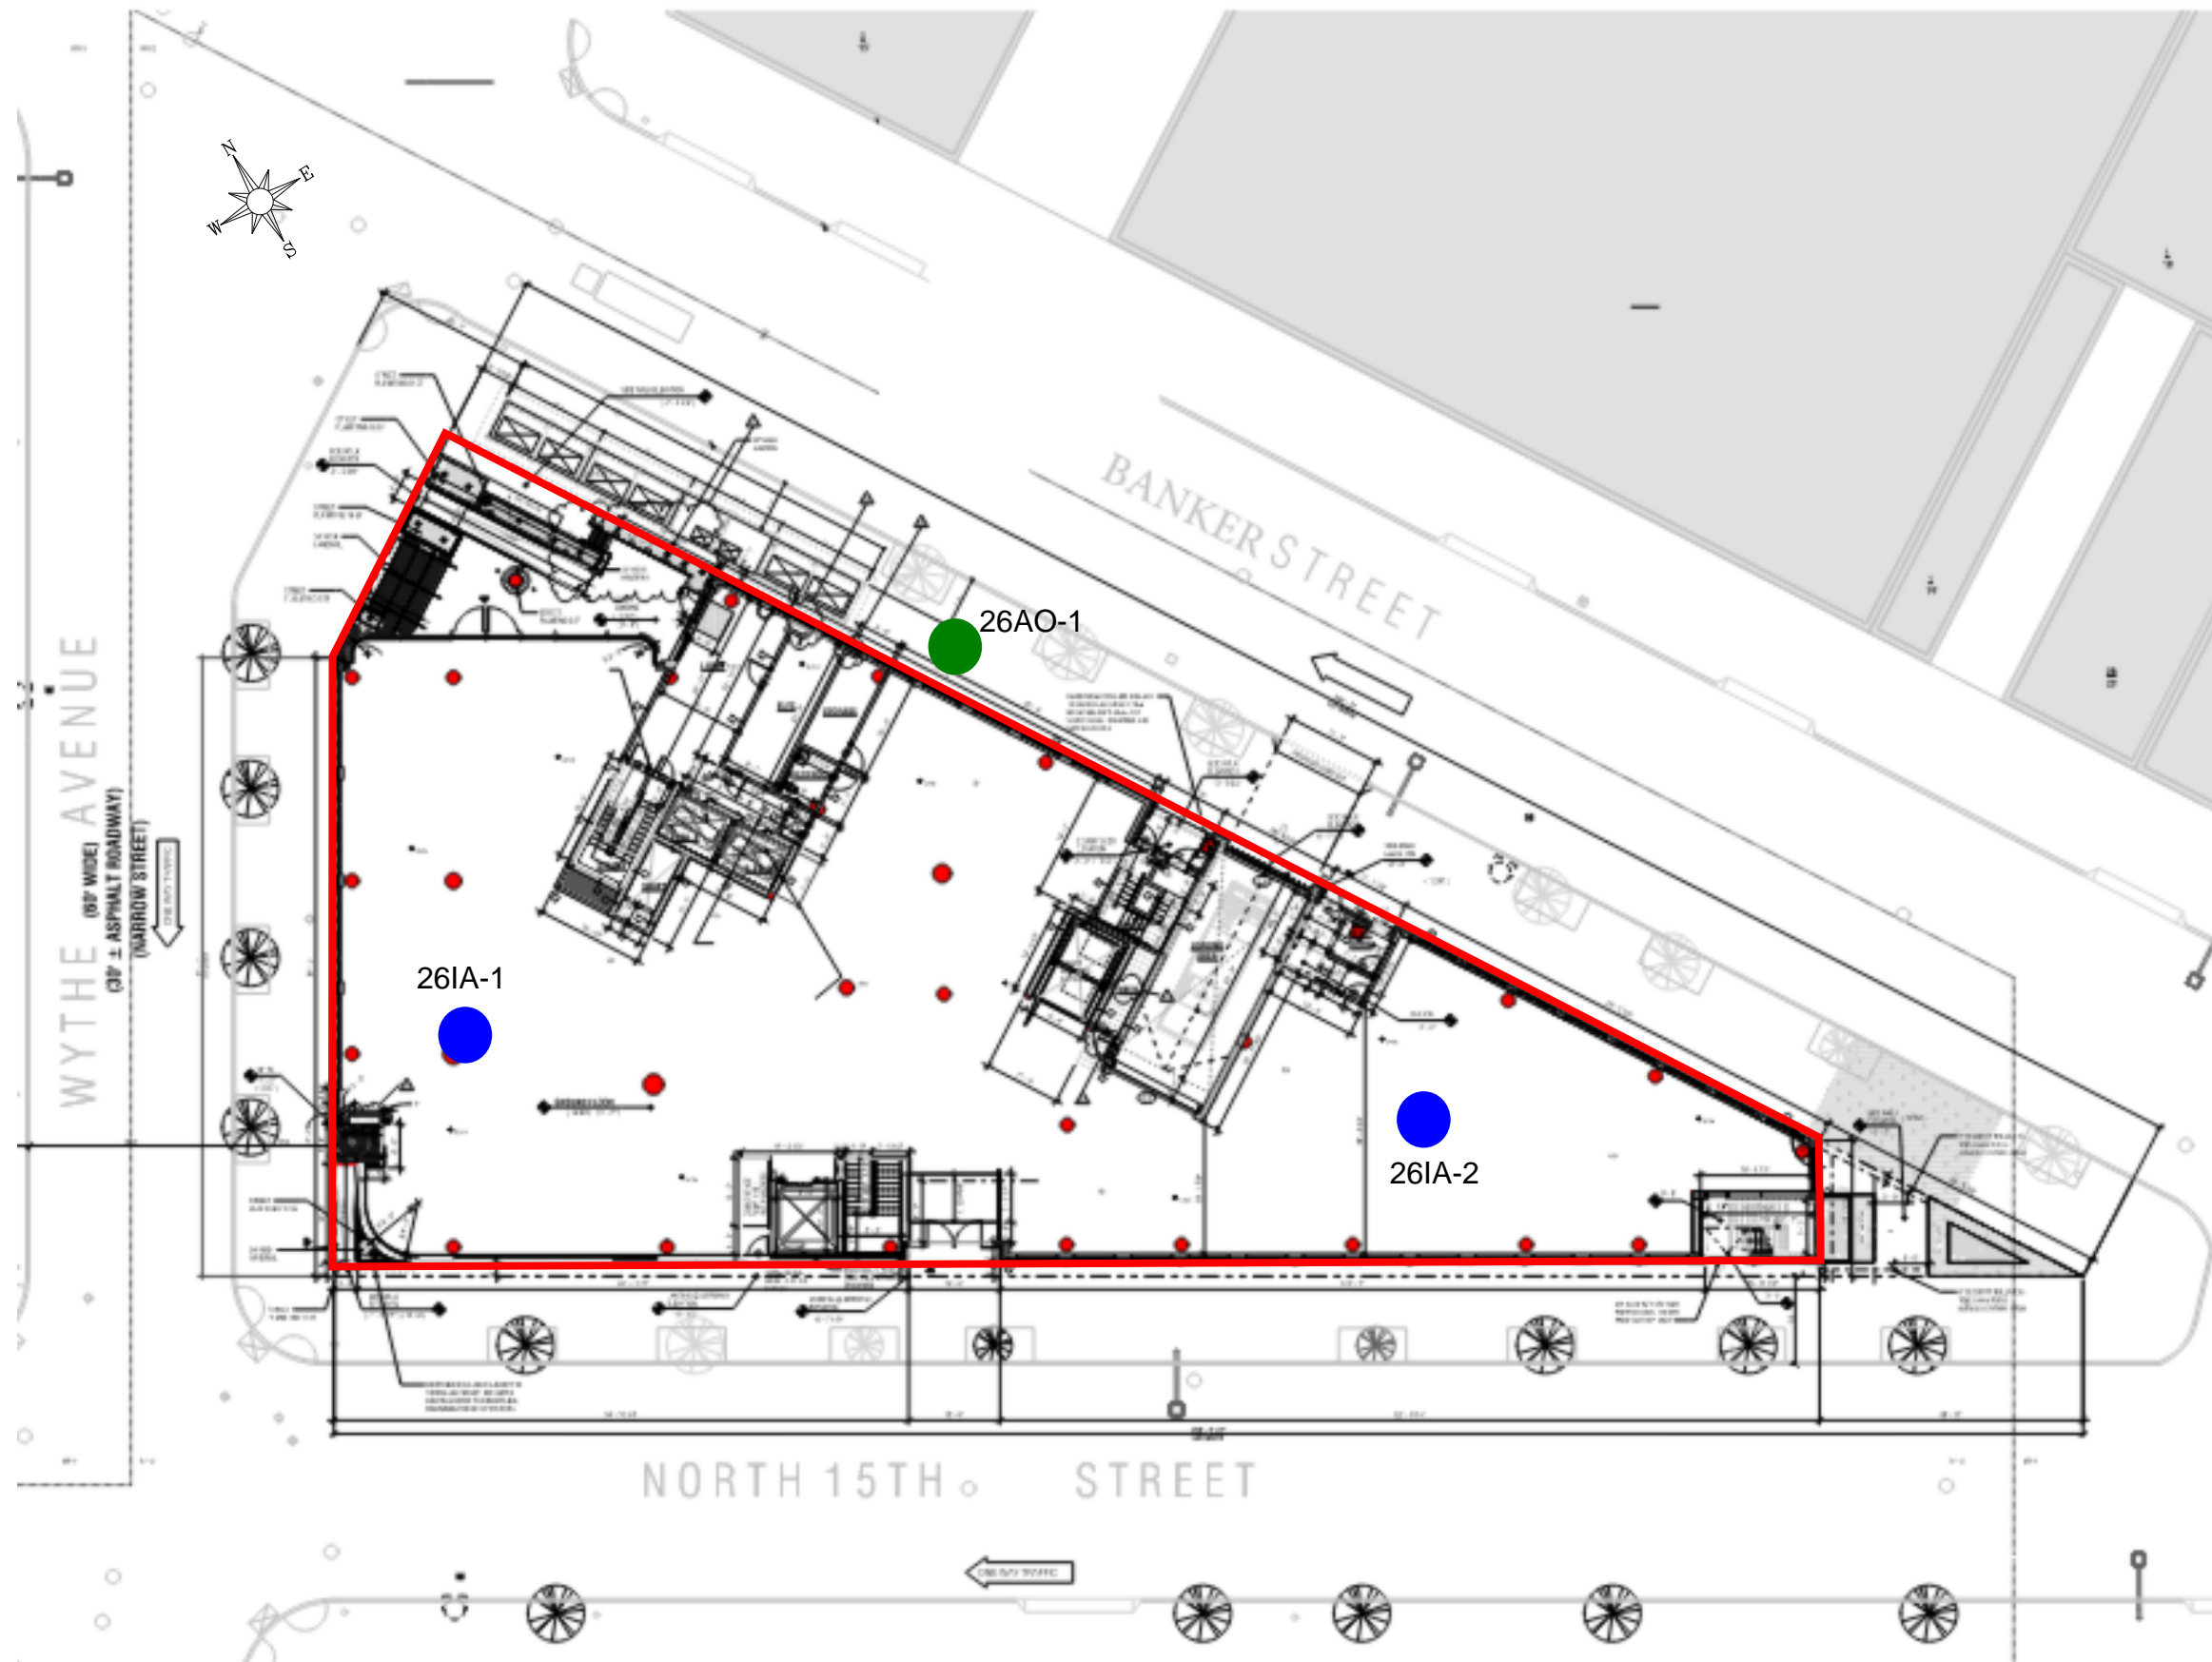

# vEktor consultants

t: +1.347.871.0750  
 f: +1.347.402.7735  
 e: info@vektorconsultants.com  
 www.vektorconsultants.com

## Legend:

- SITE BOUNDARY
- PROPOSED GROUND FLOOR INDOOR AIR SAMPLING LOCATIONS
- PROPOSED AMBIENT AIR SAMPLING LOCATION

## Notes:

1. Basemap provided by StudioSC Architecture PLLC A-101.03

## Scale:



Figure No. 1A

Figure Name: PROPOSED GROUND FLOOR SAMPLING PLAN

Report: SVIWP

Date: 3/19/2026



Drawn By: BN

Site Address: 1-9 WYTHE AVENUE  
 BROOKLYN, NY 11249

# vEktor consultants

t: +1.347.871.0750  
f: +1.347.402.7735  
e: info@vektorconsultants.com  
www.vektorconsultants.com

### Legend:

-  SITE BOUNDARY
-  PROPOSED CELLAR INDOOR AIR SAMPLING LOCATIONS

### Notes:

1. Basemap provided by StudioSC Architecture PLLC A-100.03

### Scale:



Figure No. 1B


Figure Name: PROPOSED CELLAR SAMPLING PLAN

Report: SVIWP

Date: 3/19/2026

Drawn By: BN

Site Address: 1-9 WYTHE AVENUE  
BROOKLYN, NY 11249

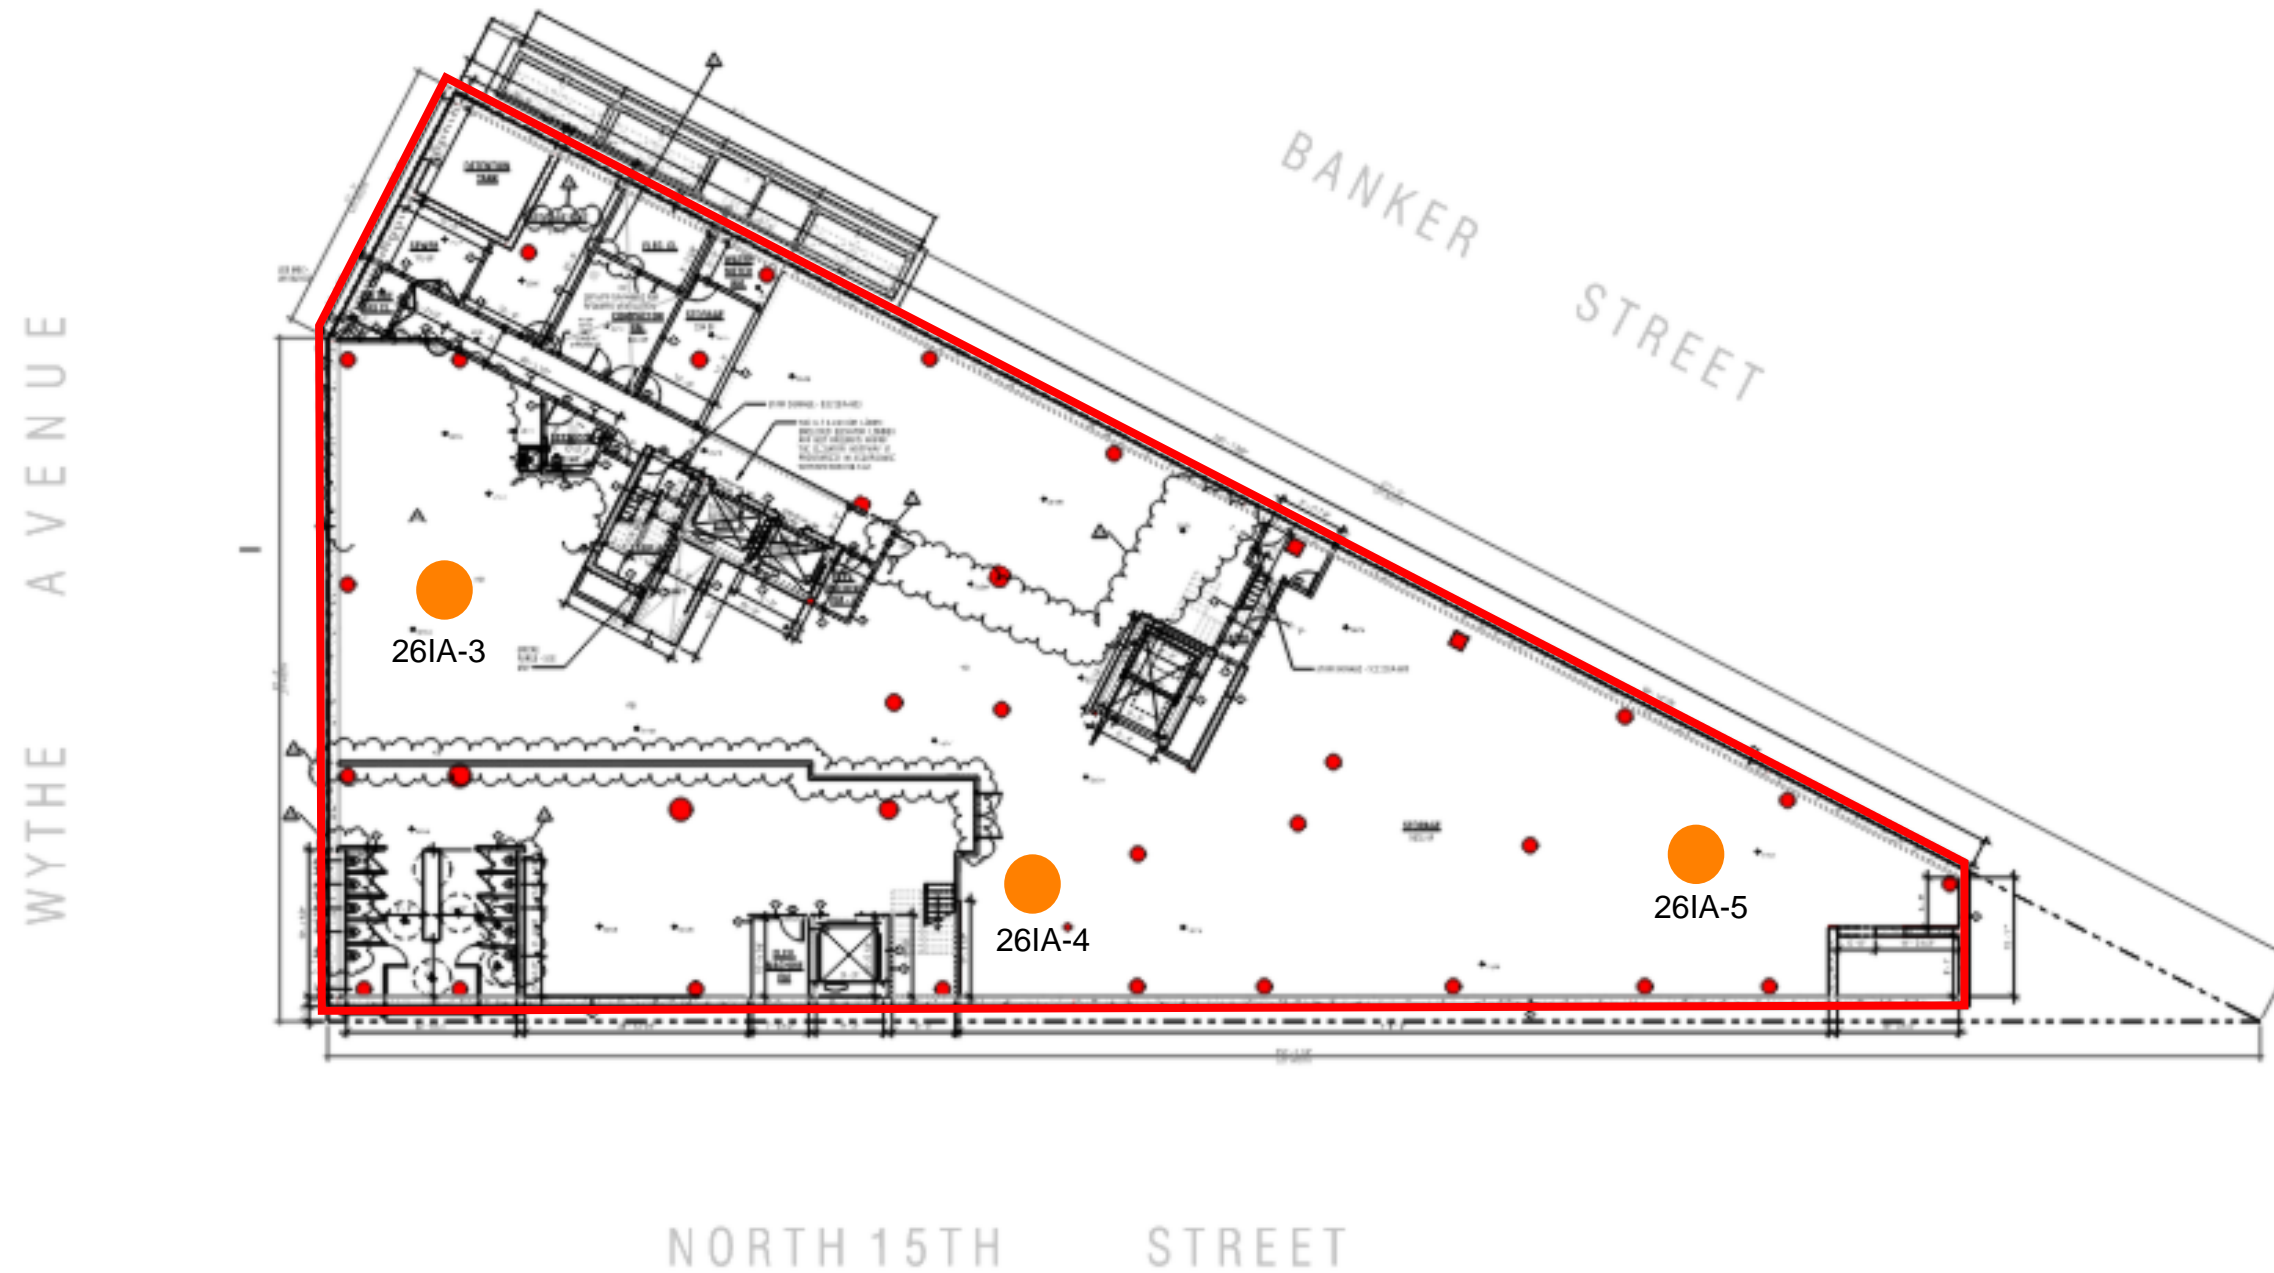

## **ATTACHMENTS**

---

**ATTACHMENT 1**  
**CHAIN OF CUSTODY EXAMPLES**

---



York Analytical Laboratories, Inc.

120 Research Drive 132-02 89th Ave  
Stratford, CT 06615 Queens, NY 11418

clientservices@yorklab.com

www.yorklab.com

**YORK**  
ANALYTICAL LABORATORIES INC

# Field Chain-of-Custody Record

YORK Project No. \_\_\_\_\_

**NOTE:** YORK's Standard Terms & Conditions are listed on the back side of this document.  
This document serves as your written authorization for YORK to proceed with the analyses requested below.  
Your signature binds you to YORK's Standard Terms & Conditions.

Page \_\_\_\_ of \_\_\_\_

YOUR Information		Report To:		Invoice To:		YOUR Project Number		Turn-Around Time	
Company:		Company:		Company:		YOUR Project Name		RUSH - Next Day	
Address:		Address:		Address:				RUSH - Two Day	
Phone.:		Phone.:		Phone.:		YOUR PO#:		RUSH - Three Day	
Contact:		Contact:		Contact:				RUSH - Four Day	
E-mail:		E-mail:		E-mail:				Standard (5-7 Day)	

<p><i>Please print clearly and legibly. All information must be complete. Samples will not be logged in and the turn-around-time clock will not begin until any questions by YORK are resolved.</i></p> <p>Samples Collected by: (print your name above and sign below)</p>	Matrix Codes	Samples From	Report / EDD Type (circle selections)			YORK Reg. Comp.
	S - soil / solid	New York	Summary Report	CT RCP	Standard Excel EDD	Compared to the following Regulation(s): (please fill in)
	GW - groundwater	New Jersey	QA Report	CT RCP DQA/DUE	EQuIS (Standard)	
	DW - drinking water	Connecticut	NY ASP A Package	NJDEP Reduced Deliverables	NYSDEC EQuIS	
	WW - wastewater	Pennsylvania	NY ASP B Package		NJDEP SRP HazSite	
O - Oil ; Other	Other		NJDKQP	Other:		

Sample Identification	Sample Matrix	Date/Time Sampled	Analysis Requested	Container Description

<b>Comments:</b>	<b>Preservation:</b> (check all that apply)	<b>Special Instruction</b>
	HCl ___ MeOH ___ HNO <sub>3</sub> ___ H <sub>2</sub> SO <sub>4</sub> ___ NaOH ___ ZnAc ___ Ascorbic Acid ___ Other: _____	Field Filtered ___ Lab to Filter ___

Samples Relinquished by / Company	Date/Time	Samples Received by / Company	Date/Time	Samples Relinquished by / Company	Date/Time
Samples Received by / Company	Date/Time	Samples Relinquished by / Company	Date/Time	Samples Received by / Company	Date/Time
Samples Relinquished by / Company	Date/Time	Samples Received by / Company	Date/Time	Samples Received in LAB by	Date/Time

**ATTACHMENT 2**  
**RESUMES**

---

# Ezgi Karayel

## Principal

### Contact

347.871.0750  
ezgi@vektorconsultants.com

Ezgi Karayel is an environmental engineer with extensive experience in brownfield redevelopment. She is the founder and Principal of Vektor Consultants and serves as Operations Officer of the firm. Ms. Karayel guides firm's clients through their due diligence processes. She manages all aspects of the firm strongly focusing on brownfield redevelopment and E-Designation projects across New York Metropolitan area. She has worked with major real estate developers and shareholders by developing strategic approaches to the environmental challenges of complex real estate transactions and brownfield redevelopment. Her experience also includes a broad range of environmental services including regulatory compliance, due diligence assessments, acquisition support, design and implementation of engineering controls and remediation systems, excavation support and soil disposal plans, and facility decommissioning.

She is the chair of the Partnership's Scholarship Program and works closely with committee members to support the education and training of students who are pursuing environmental careers.

### Education

B.S. Environmental Engineering  
University at Buffalo

### Professional Registration

OSHA 10-hour Construction and 40-hour General Industry  
OSHA 40-hour HAZWOPER and 8-hour HAZWOPER Refresher  
Certified Environmental Manager and Certified Environmental  
Inspector

### Affiliations

New York City Brownfield  
Partnership, President

Brownfield Coalition  
of the Northeast,  
Advisory Board Member

### Select Projects

Linden Boulevard, Queens, New York – Site Investigation and Remediation of a 7-acre former landfill with a Restrictive Declaration. The scope of work for the project included preparation of a Remedial Investigation Work Plan for review and approval by the NYCOER, NYSDEC and NYCDOH, implementation of Remedial Investigation, preparation of Remedial Investigation Report, Remedial Action Work Plan, preparation and implementation of a waste characterization plan for soils for proper disposal, supervision of site remediation activities, coordination with remediation engineer to design a methane mitigation system as well as vapor barrier system and managing field staff during remediation.

## **Ezgi Karayel, Principal**

---

Former Tunnel Diner, Jersey City, New Jersey – Remedial Investigation (RI) of a 1/2-acre property in accordance with the New Jersey Technical Requirements for Site Remediation. Ms. Karayel worked closely with the Licensed Site Remediation Professional (LSRP) of the project. Followed by the approval of the RAWP prepared by her, Ms. Karayel directed remediation activities at the site and managed field staff on a daily basis. Upon completion of remediation, she has prepared Remedial Action Outcome for review and certification of the LSRP.

249 North 7<sup>th</sup> Street, Brooklyn, New York – As a Project Director for a Remedial Investigation of a former auto repair shop with an active spill, Ms. Karayel was responsible for remediation of the property under the direct supervision of NYCOER and NYSDEC. Her responsibilities consisted of preparing the required reports and supervision of remediation including excavation, and installation of engineering controls. By successful coordination with NYCOER, she has managed to enroll the project in City's Clean Soil Bank program and saving the client over \$160,000 for soil disposal.

9029 Flatlands Avenue, Brooklyn, New York – E-Designation for HazMat. She conducted a Phase I ESA prior to development, followed by remedial investigation and preparation of Remedial Investigation Report and Remedial Action Work Plan for the remediation. Remediation for the project included design and implementation of an active sub-slab depressurization system. For the engineering controls design and implementation, Ms. Karayel worked closely with the Professional Engineer for the project and performed all required pilot tests, initial start-up and inspections.

37-23 33rd Street, Queens, New York – Removal of "P" Designation. Ms. Karayel managed to prevent the property from becoming a Class II site by performing a thorough due-diligence and disproving the prior consultant's findings and recommendations. Furthermore, her due-diligence study and evaluation saved the client over \$1,000,000 clean-up costs, regulatory and legal fees.

261 Grand Concourse, Bronx, New York – Brownfield Redevelopment

1-9 Wythe Avenue, Brooklyn, New York – Brownfield Redevelopment

42 Reeve Place, Brooklyn, New York – Spill Closure

21-01 21<sup>st</sup> Street, Queens, New York – Former Gasoline Station Decommissioning and Storage Tank Removal

260-262 Van Brunt Street, Brooklyn, New York – Brownfield Cleanup

299 East 161<sup>st</sup> Street, Bronx, New York – Voluntary Cleanup Program

122 East 32<sup>nd</sup> Street, New York, New York – Community Center, Remediation under Voluntary Cleanup Program

346 Metropolitan Avenue, Brooklyn, New York – Voluntary Cleanup Program

574 Broome Street, New York, New York – Voluntary Cleanup Program

173-175 McGuinness Boulevard, Brooklyn, New York – Voluntary Cleanup Program

4790 Broadway, New York, New York – Voluntary Cleanup Program

# Ben Neumann

## Assistant Project Manager

### Contact

347.871.0750  
bneumann@vektorconsultants.com

Ben Neumann is an Assistant Project Manager with Vektor Consultants. He is responsible for conducting and overseeing field investigations and site assessments. In addition, Ben authors Phase I and Phase II Environmental Site Assessments, Remedial Investigation Workplans, Remedial Investigation Reports, Remedial Action Workplans, Remedial Action Reports, and Installation Reports. His responsibilities include providing environmental oversight at construction project sites in the New York City Metropolitan area, performing site visits, conducting subsurface investigations and waste characterization sampling. Ben's experience and education in environmental remediation and project management provides valuable knowledge and insight for navigating projects through different regulatory programs.

### Education

B.S. Environmental Science  
Environmental Engineering &  
Technology Focus  
Union College, Schenectady, NY

### Professional Registration

Project Management Professional (PMP)  
OSHA 30-hour Construction  
OSHA 40-hour HAZWOPER  
10-Hour Site Safety Training (SST)

### Affiliations

The New York City Brownfield  
Partnership

### Select Projects & Prior Experience

1533-1541 60<sup>th</sup> Street – Voluntary Cleanup Program  
1547-1555 60<sup>th</sup> Street – Voluntary Cleanup Program  
601 Union Street – Brownfield Cleanup Program

Prior to joining Vektor, Ben assisted Licensed Site Remediation Professionals (LSRPs) and carried out project management duties on over 100 projects within the New Jersey Department of Environmental Protection's (NJDEP) Site Remediation Program (SRP). Ben performed and oversaw Site Investigation, Remedial Investigation, and Remedial Action activities to achieve site remediation goals and obtain project closure via the issuance of Response Action Outcome (RAO) and No Further Action (NFA) Letters.

# Spencer Berlin

## Environmental Scientist

### Contact

216.212.2033  
sberlin@vektorconsultants.com

Spencer Berlin is an environmental scientist with Vektor Consultants, he is responsible for conducting field investigations and site assessments. His responsibilities include providing environmental oversight at construction project sites in New York City Metropolitan area, performing site visits and preparing Phase I Environmental Site Assessments, as well as, performing Phase II Environmental Site Assessments, Remedial Investigations, waste characterization sampling, and preparing associated reports. His experience and education with environmental due diligence and science provides knowledge and insight for navigating projects through different regulatory programs.

### Education

B.A. Environmental Studies  
Certificate in Public Health  
University of Colorado Boulder

### Professional Registration

OSHA 30-hour Construction  
OSHA 40-hour HAZWOPER  
10-Hour Site Safety Training (SST)  
NYSDEC SWPPP Certification

### Affiliations

### Select Projects

Prior to joining Vektor, Spencer played a key role in the \$19 billion redevelopment of John F. Kennedy Airport, where he oversaw a wide range of critical field operations. His responsibilities included performing construction oversight, waste classification sampling, stockpile sampling, groundwater sampling, and soil loadouts, as well as conducting air and vibration monitoring and communication surveying. In addition to executing these tasks in the field, he authored comprehensive technical reports for each activity, ensuring regulatory compliance and clear communication with project stakeholders.

50-18 Vernon Boulevard, Queens, New York – Brownfield Cleanup Program  
1-9 Wythe Avenue, Brooklyn, New York – Brownfield Cleanup Program

# DONALD C. ANNÉ

## SENIOR CHEMIST

---

**EDUCATION:** M.S., Chemical Oceanography, Florida Institute of Technology, 1981  
B.A., Earth Sciences, Millersville University of Pennsylvania, 1975

**SPECIAL TRAINING:** Certified 40-Hour OSHA Health and Safety  
Certified 8-Hour OSHA Supervisory Course  
Ground Water Geochemistry (NWWA)  
Ground Water Pollution and Hydrology (Princeton Associates)  
Quality Assurance Programs for Environmental Monitoring Data  
(Stat-A-Matrix)

**PROFESSIONAL AFFILIATIONS:** American Chemical Society (AFS), 1979-Present

### EXPERIENCE SUMMARY:

Mr. Anné has more than 39 years of environmental chemistry experience specializing in data validation, environmental sampling, analytical methodologies, petroleum fingerprinting, laboratory audits, field sampling audits, and preparing Quality Assurance Project Plans and Quality Assurance Manuals. Mr. Anné's experience includes analytical laboratory work with gas chromatography, atomic absorption, infrared spectrometry and wet chemistry methods.

### PROJECT EXPERIENCE:

#### Quality Assurance/Quality Control of Chemical Data- Data Validation

Mr. Anné has more than 23 years experience as a data validator and quality assurance officer. Mr. Anné has validated data for most EPA Regions and under several independent state programs, including the NYSDEC. He has performed laboratory and field audits as well as written Quality Assurance Project Plans. Mr. Anné has written, reviewed, and initiated laboratory Quality Assurance Manuals for laboratories to maintain their regulatory compliance. Typical project experience includes:

- Senior Chemist responsible for data validation. Reviewed chemical data for numerous projects under the New Jersey ISRA regulations. Data validation typically is performed as a third-party validator under subcontract to consultants for private industry and utility companies.
- Supervising Environmental Scientist responsible for data validation. Reviewed chemical laboratory data for adherence to QA/QC protocols for several key projects, including National Priorities List sites and RCRA Corrective Actions located in EPA Regions I, II, III, IV, V, and IX. Validated analytical data, outlined problems and actions to be taken, and qualified all affected data. Consulted with project managers on data usability, and recommended corrective actions to support project goals. Responded to comments made by regulators regarding data quality.
- Supervising Environmental Scientist recognized by the New York State Department of Environmental Conservation (NYSDEC) to perform third party data validation. Attended NYSDEC workshop on data

validation as part of the requirements set forth by NYSDEC. Performed data validation in support of NYSDEC ASP programs as well as data in support of the NYSDEC Part 360 Regulations for landfills. Validated data for an Albany area municipal landfill.

- Supervising Environmental Scientist responsible for developing and preparing Quality Assurance Project Plans (QAPPs) for several state and federal Superfund sites and federal RCRA corrective action sites. Negotiated with regulators for the acceptance of the QAPPs. The sites were located throughout the eastern United States.
- Environmental Chemist responsible for developing a laboratory QA/QC program which fulfilled requirements of the EPA and agencies from the States of Texas and Louisiana. Implemented and managed the program throughout DOE's SPR Environmental laboratories. Received verbal commendations from EPA and the Texas Water commission on the QA/QC Program.

### **Related Chemistry Experience:**

Mr. Anné is experienced in sampling soil, water, air, and wastes in accordance with federal and state guidelines. He has performed field sampling audits and prepared sampling plans for numerous projects in accordance with applicable programmatic requirements. Mr. Anné is familiar with the geochemical aspects of fate and transport of contaminants.

Mr. Anné also has experience working in both fixed-base and mobile laboratories. His experience includes the use of gas chromatography, atomic absorption spectrometers, infrared spectrometers, and numerous wet chemistry and preparation equipment methods. He has served in the laboratory as an analyst, laboratory advisor, and QA officer. He has interfaced with regulators in the area of analytical chemistry and has experience in petroleum fingerprinting techniques and methods.

**EMPLOYMENT:** 2005- present, Alpha Geoscience  
1998-2005, Alpha Environmental Consultants, Inc.  
1990-1998, McLaren/Hart  
1986-1990, Fred C. Hart Associates  
1985-1986, Boeing Petroleum Services  
1982-1985, Petroleum Operations and Support Services  
1981-1982, Dravo Utility Constructors  
1979-1981, Florida Institute of Technology  
1975-1979, Berkley Products Company

Z:\ALPHARESUMES\DCANDCA- ABBREV. DATA VAL.DOC

## **APPENDIX C**

---

### **HEALTH AND SAFETY PLAN**

## HEALTH AND SAFETY PLAN

**Prepared For:** One Wythe LLC  
**Site Name:** Former Anglo Chemical and Rubber Site  
**Site Location:** 1-9 Wythe Avenue, Brooklyn, New York  
**Date:** March 2026

## Table of Contents

<b>1.0</b>	<b>INTRODUCTION .....</b>	<b>1</b>
1.1	Site Location and Description .....	1
1.2	Soil Vapor Intrusion Investigation .....	1
<b>2.0</b>	<b>ORGANIZATIONAL STRUCTURE .....</b>	<b>2</b>
2.1	Site Supervisor .....	2
2.2	Site Health and Safety Supervisor .....	3
2.3	Contractors and Subcontractors .....	4
2.4	Local/State/Federal Agency Representative .....	4
<b>3.0</b>	<b>HAZARD ANALYSIS.....</b>	<b>6</b>
3.1	Hazard Notification Process.....	6
3.2	Phases, Site Tasks and Hazard Analysis .....	6
3.3	Chemical Hazards.....	6
3.4	Physical Hazards .....	7
3.5	Biological Hazards.....	7
3.6	Radiological Hazards .....	7
3.7	Job Hazard Analysis Worksheets.....	7
<b>4.0</b>	<b>TRAINING PROGRAM.....</b>	<b>9</b>
4.1	Initial HazWoper Training.....	9
4.2	Site-Specific Training.....	9
4.3	Site Briefings.....	10
<b>5.0</b>	<b>MEDICAL SURVEILLANCE PROGRAM.....</b>	<b>11</b>
<b>6.0</b>	<b>PERSONAL PROTECTIVE EQUIPMENT.....</b>	<b>12</b>
6.1	PPE Selection Criteria .....	12
<b>7.0</b>	<b>ENVIRONMENTAL MONITORING.....</b>	<b>14</b>
7.1	Air Monitoring Procedures .....	14
7.2	Initial Monitoring Procedures.....	14
7.3	Periodic Monitoring .....	14

7.4 Direct-Reading Instrument Monitoring Procedures .....15

**8.0 DECONTAMINATION.....16**

8.1 General and Specific Decontamination Procedures for Site Workers and PPE.....16

8.2 General and Specific Decontamination Procedures for Equipment .....17

8.3 Location and Type of Site Decontamination Procedures .....17

8.4 Disposal of Waste from Decontamination.....17

8.5 Monitoring the Effectiveness of Decontamination Procedures .....17

**9.0 EMERGENCY RESPONSE PLAN .....18**

9.1 Pre-Emergency Planning.....18

9.2 Personnel Roles, Lines of Authority, and Communication .....18

9.3 Site Security and Control .....19

9.4 Emergency Medical Treatment and First Aid .....19

- Figure 1: Site Location Map**
- Attachment 1: Job Hazard Analysis Worksheet**
- Attachment 2: Directions to Hospital**

<b>Emergency Contacts</b>			
<b>Position</b>	<b>Name</b>	<b>Organization</b>	<b>Phone</b>
Project Director	Ezgi Karayel	Vektor Consultants	(347) 871-0750
Project Manager	Ben Neumann	Vektor Consultants	(347) 871-0750
Field Representative	Spencer Berlin	Vektor Consultants	(347) 871-0750
Site Health and Safety Supervisor	Spencer Berlin	Vektor Consultants	(347) 871-0750
Client Contact	Louis Handler	One Wythe LLC	(718) 302-7005
Project Manager	Christine Vooris	NYSDOH	
Project Manager	Richard Mustico	NYSDEC	(518) 402-9647
Emergency Response		FDNY	911
Spill Hotline		NYSDEC	(800) 457-7362

<b>Emergency Medical Facility</b>	
<b>Primary</b>	<b>Alternate</b>
The Brooklyn Hospital Center 121 Dekalb Avenue, Brooklyn NY 11201 Tel: (718) 250-8000 Open 24 Hours	New York Presbyterian Brooklyn Methodist Hospital 506 6 <sup>th</sup> Street, Brooklyn, NY 11215 Tel: (718) 780-3000 Open 24 Hours
<b><i>Route to emergency medical facility map attached to back of this health &amp; safety plan</i></b>	



## 1.0 INTRODUCTION

This Health and Safety Plan (HASP) has been prepared on behalf of on behalf of One Wythe LLC (the Applicant) for the implementation of a Soil Vapor Intrusion (SVI) Evaluation Work Plan by Vektor Consultants (Vektor) at 1-9 Wythe Avenue in Brooklyn, New York (the Site).

This HASP describes lines of authority, responsibility, and communication as they pertain to health and safety functions at this site in compliance with *29 CFR 1910.120(b)(2)* and *29 CFR 1926.65(b)(2)*. This plan also details key personnel who are responsible for the development and implementation of the HASP. Vektor field personnel will implement this HASP during the implementation of SVI Evaluation Work Plan.

### 1.1 Site Location and Description

The Site is located on the south side of Wythe Avenue between Banker Street and North 15<sup>th</sup> Street, approximately 800 feet east of the East River. The Site consists of one tax lot that is approximately 16,652-square feet. The legal description of the subject property is Block 2641 and Lot 4 (former Lots 1, 3, and 4 were merged into one new Lot 4). The Site is bounded by a vacant lot to the north beyond Wythe Avenue, three one-story industrial use buildings and a vacant lot to the east across Banker Street, one single-story and one two-story industrial use buildings to the west across North 15<sup>th</sup> Street, and intersection of North 15<sup>th</sup> Street and Banker Street to the south. A Site Location Map is provided as Figure 1.

### 1.2 Soil Vapor Intrusion Investigation

An SVI evaluation proposed herein will be conducted in the new building to establish baseline concentrations of volatile organic compounds (VOCs) in indoor air during heating season prior to occupancy.

The proposed scope of work for the SVI evaluation is as follows:

- Pre-sampling inspection of the new building,
- Collection of three indoor air samples (26IA-1 through 26IA-3) in the cellar.
- Collection of two indoor air samples (26IA-4 and 26IA-5) on the 1<sup>st</sup> floor.
- Collection of one outdoor ambient air sample (26OA-1) at an upwind location.

## 2.0 ORGANIZATIONAL STRUCTURE

Vektor will provide a copy of this HASP to each contractor and subcontractor in accordance with 29 CFR 1910.120(b)(1)(iv) and 29 CFR 1926.65(b)(1)(iv) to inform them of site hazards and emergency procedures. All contractors and subcontractors are solely responsible for the safe and healthful performance of all work by each of its employees and/or support personnel who may enter the Site. Each contractor and subcontractor shall provide its own HASP as required by 29 CFR 1910.120 and 29 CFR 1926.65. However, they need to submit a copy of their HASP to Vektor, or they can adopt this HASP during the SVI investigation.

### 2.1 Site Supervisor

As required by *29 CFR 1910.120(b)(2)(i)(A) and 29 CFR 1926.65(b)(2)(i)(A)*, a Site Supervisor will be assigned to the project prior to SVI investigation. The Site Supervisor is responsible for directing all hazardous waste operations. All other site personnel report directly to the Site Supervisor unless otherwise noted. The Site Supervisor is directly responsible for:

- Ensuring the pre-entry briefing and/or tailgate-safety meetings are held prior to initiating any site activity, and at such other times as necessary to ensure that employees are apprised of site hazards
- Ensuring that all work activities conducted are consistent with this HASP and making any modifications as necessary
- Verifying all Job Hazard Analyses and ensuring that ongoing Hazard Analysis is conducted at this Site
- Overseeing the training program and ensuring that employees are trained for all tasks or operations they are asked to perform
- Providing a copy of this HASP to each contractor and subcontractor
- Updating the Site Control Program as needed
- Granting site workers site and zone access approval
- Registering all site visitors
- Establishing and maintaining security measures for this Site
- Directing how each work zone is adjusted
- Notified if emergency assistance is needed
- Supervising PPE use on this Site
- Approving any changes in PPE used on this Site
- Notified when any hazardous-substance spill occurs
- Evaluating the quality and safety of response activities after every emergency incident or evacuation of this Site
- Providing site workers with notifications and training on changes to the emergency response plan

- Evaluating confined spaces and responsible for the confined space permit program
- Performing initial monitoring to identify and evaluate any hazardous atmospheres during confined space operations
- Implementing the thermal stress program
- Authorizing the hot-work plan and cutting and welding operations
- Inspecting the hot-work permit area before work is authorized
- Monitoring site activities as they pertain to health and safety at this site
- Stopping any unsafe acts that pose an immediate or imminent health and safety hazard to anyone at this site
- Ensuring that all elements of this HASP are followed and correctly implemented
- Updating the Site Health and Safety Supervisor and other applicable personnel as to changes or work progress reports that may pertain to health and safety functions at this site
- Setting up decontamination lines and the solutions appropriate for the type of chemical contamination on Site
- Controlling the decontamination of all equipment, personnel and samples from the contaminated areas
- Ensuring that all required decontamination equipment is available and in working order
- Providing for collection, storage and disposal of decontamination waste (e.g., rinse water, contaminated sediment, etc.)

## 2.2 Site Health and Safety Supervisor

As required by *29 CFR 1910.120(b)(2)(i)(B)* and *29 CFR 1926.65(b)(2)(i)(B)*, Benjamin Neumann (or designated alternate) is the Site Health and Safety Supervisor who has the responsibility and authority for all functions that may pertain to health and safety at this site. This is the individual located on a hazardous waste site that is responsible to the Site Supervisor and has the authority and knowledge necessary to implement the HASP and verify compliance with applicable safety and health requirements. The Site Health and Safety Supervisor is directly responsible for:

- Providing a copy of this HASP to each contractor and subcontractor
- Updating the Site Control Program as needed
- Notified if emergency assistance is needed
- Supervising PPE use on this Site
- Approving any changes in PPE used on this Site
- Notified when any hazardous-substance spill occurs
- Providing site workers with notifications and training on changes to the emergency response plan
- Performing initial monitoring to identify and evaluate any hazardous atmospheres during confined space operations
- Developing and implementing the HASP

- Monitoring site activities as they pertain to health and safety at this Site
- Stopping any unsafe acts that pose an immediate or imminent health and safety hazard to anyone at this Site
- Ensuring that all elements of this HASP are followed and correctly implemented
- Verifying compliance of subcontractors with respect to this HASP and reporting deviations to the Site Supervisor
- Evaluating site incidents including spills, releases of hazardous substances
- Determining the appropriate response including site evacuations
- Implementing the Emergency Response Plan
- Coordinating emergency response activities on this Site

### **2.3 Contractors and Subcontractors**

Each contractor and subcontractor shall designate a Contractor Site Representative. The Contractor Site Representative will interface directly with the Site Supervisor, and Vektor Consultants, the Site Health and Safety Supervisor, with regards to all areas that relate to this HASP and safe and healthful performance of work conducted by the contractor and/or subcontractor workforce. Contractor/Subcontractor Site Representatives for this site are listed in the Contact Summary Table at the end of this section.

### **2.4 Local/State/Federal Agency Representative**

Local, state, and/or federal agencies are responsible for ensuring the Site is in compliance with appropriate regulatory requirements, permits, and/or legal ruling(s). Local/State/Federal Agency Representatives for this Site are listed in the Contact Summary Table at the end of this section.

The organizational structure shall be reviewed and updated as necessary to reflect the current status of site operations.

**Contact Summary Table**

<b>Position</b>	<b>Name</b>	<b>Organization</b>	<b>Phone/Email</b>
Project Director	Ezgi Karayel	Vektor Consultants	(347) 871-0750
Project Manager	Ben Neumann	Vektor Consultants	(347) 871-0750
Field Representative	Spencer Berlin	Vektor Consultants	(347) 871-0750
Site Health and Safety Supervisor	Ben Neumann	Vektor Consultants	(347) 871-0750
Client Contact	Louis Handler	One Wythe LLC	(718) 302-7005
Project Manager	Richard Mustico	NYSDEC	(518) 402-9647
Emergency Response		FDNY	911
Spill Hotline		NYSDEC	(800) 457-7362

### 3.0 HAZARD ANALYSIS

This section describes the safety and health hazards associated with site work and the control measures selected to protect workers in compliance with *29 CFR 1910.120(b)(4)(ii)(A)* and *29 CFR 1926.65(b)(4)(ii)(A)*. This is accomplished by creating a specific Job Hazard Analysis for each task and operation to be conducted at the Site.

The purpose of the Job Hazard Analysis is to identify and, to the extent practicable, quantify the health and safety hazards associated with each site task and operation, and to evaluate the risks of each hazard to workers. With this information, appropriate control methods are selected to eliminate the identified risks if possible, or to effectively control them. The control methods are documented in each task-specific Job Hazard Analysis.

Job Hazard Analyses contained in this HASP have been developed by Vektor Consultants, the Site Health and Safety Supervisor. The Site Supervisor is the individual responsible for reviewing and "verifying" that all Job Hazard Analyses are complete and to ensure that ongoing hazard analyses are conducted at this site.

#### 3.1 Hazard Notification Process

The information in the Job Hazard Analysis Worksheets, Hazardous Substance Profiles, and Safety Data Sheets (SDS) is made available to all employees who could be affected in the scope of their work at the Site. This shall be done prior to beginning work activities.

New, or modifications to existing, Job Hazard Analysis Worksheets, Hazardous Substance Profiles, or SDS are communicated during routine briefings. Consistent with *29 CFR 1910.120(i)* and *29 CFR 1926.65(i)*, this information will also be made available to contractors and subcontractors.

The Site Supervisor is the person responsible for providing Site information, this HASP, and any modifications to this HASP to contractors and/or subcontractors working on this Site.

#### 3.2 Phases, Site Tasks and Hazard Analysis

This HASP applies to the SVI Study phase at the Site. This HASP will apply to the following Tasks and/or Operations that will be accomplished during the SVI Study:

- Drilling (installation of soil vapor points)
- Decontamination
- Inspection
- Sampling (soil vapor, air, ambient air, investigative derived waste)

#### 3.3 Chemical Hazards

Exposure to chemical hazards should always be avoided. When working around chemical hazards it is important to be protected by administrative and/or engineered controls or, if

administrative and/or engineered controls are not practicable or fully protective, by use of proper personal protective equipment (PPE). A direct reading instrument must be used, as necessary, to establish potential worker exposure.

**OSHA PEL.** OSHA sets permissible exposure limits (PELs) to protect workers against the health effects of exposure to hazardous substances. PELs are regulatory limits on the amount or concentration of a substance in the air. They may also contain a skin designation. PELs are enforceable. OSHA PELs are based on an 8-hour time weighted average (TWA) exposure.

**IDLH.** Immediately dangerous to life or health (IDLH) is a regulatory value defined as the maximum exposure concentration in the workplace from which one could escape within 30 minutes without any escape-impairing symptoms or any irreversible health effects. This value should be referred to in respirator selection.

### 3.4 Physical Hazards

Below is a list of physical hazards that may be encountered during SVI activities at this Site. Personal awareness, strict adherence to all safety requirements, and the use of proper PPE when applicable will help keep this work site safe.

- Hand Tool Use
- Heavy Manual Lifting/Moving
- Material Handling
- Noise (Sound Pressure Level), dBA
- Sharp Objects
- Slips/Trips/Falls
- Traffic - On or Near Site
- Utilities (electrical, gas, water, etc.) – Overhead
- Utilities (electrical, gas, water, etc.) – Underground

### 3.5 Biological Hazards

No biological hazards are expected to be encountered during SVI investigation at this Site.

### 3.6 Radiological Hazards

Job hazard analysis indicates that workers are not expected to encounter radiological hazards at this Site for the phases, tasks and/or operations and work locations covered by this HASP.

### 3.7 Job Hazard Analysis Worksheets

The site-specific Job Hazard Analysis Worksheet is included in Attachment 1. A single Job Hazard Analysis Worksheet may be used for multiple locations provided that the task or operation, and hazards and control measures, are the same in each location.

The Job Hazard Analysis Worksheet lists the following information:

- Phase description
- Specific task or operation
- Specific location for task or operation
- Hazard analysis date(s) of task or operation
- Task or operation date(s)
- Person responsible for developing Job Hazard Analysis
- Person responsible for reviewing the Job Hazard Analysis
- Chemical, physical, biological and radiological hazards for each task or operation
- Specific control measures for each task or operation
- Required permit(s), if any

The Job Hazard Analysis Worksheet should be kept updated as information changes and previous copies should be retained.

## 4.0 TRAINING PROGRAM

The Site Safety and Health Training Program is designed to provide workers with the training necessary to work safely on this Site in compliance with *29 CFR 1910.120(b)(4)(ii)(B) and 29 CFR 1926.65(b)(4)(ii)(B)*. Training requirements for this site are based on the Job Hazard Analysis, contained in Attachment 1 of this HASP, and relevant OSHA requirements. Employees who have not been trained to a level required by their job function and responsibility are not permitted to participate in or supervise field activities.

### 4.1 Initial HazWoper Training

Initial training requirements for field personnel are based on the personnel's potential for exposure and compliance with the requirements of *29 CFR 1910.120(e)(3) and 29 CFR 1926.65(e)(3)*.

General Site Workers (such as equipment operators, general laborers and supervisory personnel) engaged in hazardous substance removal or other activities that expose, or potentially expose, them to hazardous substances and health hazards shall receive a minimum of 40 hours of instruction off site, and a minimum of three days of actual field experience under direct supervision of a trained, experienced supervisor as per *29 CFR 1910.120(e)(3)(i) and 29 CFR 1926.65(e)(3)(i)*.

Specific Limited Task Workers on site only occasionally for a specific limited task (such as, but not limited to, field sampling, land surveying, geophysical surveying, or drilling) and who are unlikely to be exposed over permissible exposure limits and published exposure limits shall receive a minimum of 24 hours of instruction off site, and a minimum of one day of actual field experience under direct supervision of a trained, experienced supervisor as per *29 CFR 1910.120(e)(3)(ii) and 29 CFR 1926.65(e)(3)(ii)*.

### 4.2 Site-Specific Training

In addition to the initial HAZWOPER training requirements outlined above, site personnel shall be trained on the following site-specific elements:

- Names of personnel and alternates responsible for site safety and health
- Health, safety, and other hazards present
- Use of specific personal protective equipment (PPE) detailed in this HASP
- Standard work practices by which the personnel can minimize risks from the hazards detailed in this HASP
- Safe use of administrative and/or engineering controls and equipment detailed in this HASP
- Medical surveillance requirements detailed in this HASP
- Decontamination procedures detailed in this HASP
- The emergency response plan detailed in this HASP

- Heat and cold stress prevention
- Working safely around heavy equipment

### **4.3 Site Briefings**

A site-specific briefing shall be provided to visitors who enter this Site beyond the designated entry point. For visitors, the site-specific briefing shall include information about site hazards, the site layout including work zones and places of refuge, the emergency alarm system and emergency evacuation procedures, and other pertinent safety and health requirements, as appropriate.

## 5.0 MEDICAL SURVEILLANCE PROGRAM

The Medical Surveillance Program is designed to medically monitor worker health to ensure that personnel are not adversely affected by site hazards in compliance with *29 CFR 1910.120(b)(4)(ii)(D)* and *29 CFR 1926.65(b)(4)(ii)(D)*.

Medical surveillance is not required at this site due to:

- There is NO potential for worker exposure to hazardous substances at levels above OSHA permissible exposure limits or other published limits for 30 days or more per year, without regard to use of respiratory protection.
- Personnel DO NOT wear a respirator for 30 days or more a year or as required by *29 CFR 1910.134* and *29 CFR 1926.103*.

Any worker who is injured, becomes ill, or develops signs or symptoms of possible over-exposure to hazardous substances or health hazards on this Site shall receive a medical examination as soon as possible after the occurrence, with follow-up examinations provided as required by the attending physician. Physical Exams shall be consistent with *29 CFR 1910.120(f)* and *29 CFR 1926.65(f)*.

## 6.0 PERSONAL PROTECTIVE EQUIPMENT

Personal protective equipment (PPE) will be used at this Site to protect employees from biological, chemical and physical hazards in compliance with *29 CFR 1910.120(b)(4)(ii)(C)* and *29 CFR 1926.65(b)(4)(ii)(C)*. This includes hazards associated with, but not limited to, SVI Study activities.

With employee safety being the number one priority, site health hazards will be eliminated or reduced to the greatest extent possible through administrative and/or engineering controls and safe work practices. Where hazards are still present, a combination of administrative and/or engineering controls, work practices, and PPE will be used to protect employees.

The Site Supervisor and/or Health and Safety Supervisor are responsible for PPE use on this Site.

### 6.1 PPE Selection Criteria

PPE shall be selected and used to protect site workers from the hazards and potential hazards they are likely to encounter, as identified during the site characterization and Job Hazard Analysis (see Attachment 1). A PPE ensemble shall be assigned to each work task or operation.

PPE selection shall be based upon many factors. Materials providing the greatest duration of protection shall be used. Tear and seam strength of the PPE shall also be considered to ensure ensemble durability while work is performed.

When necessary, multiple layers of protection shall be used to accommodate the range of hazards that may be encountered. All PPE shall be properly fitted.

PPE selection criteria shall also include:

- Level of PPE required (Level A, B, C, or D)
- PPE components
- Chemical suit and glove compatibility

All PPE ensembles shall be consistent with Appendix B of *29 CFR 1910.120* and *29 CFR 1926.65* and used in accordance with manufacturers' recommendations.

The following criteria were used to select PPE levels at this Site:

Level D Protection was selected due to the following:

- The atmosphere contains no known or suspected hazardous substances at concentrations that meet or exceed the published exposure limits

- Contact with hazardous levels of any chemicals through splashes, immersion, or by other means will not occur
- There is no potential for unexpected inhalation or contact with hazardous levels of any chemical

#### Training In Use of PPE

Employees receive general training regarding proper selection, use and inspection of PPE during initial HAZWOPER training and subsequent refresher training. Site-specific PPE requirements, including task-specific PPE, ensemble components, cartridge and canister service times, and inspection and maintenance procedures, as applicable, shall be communicated as identified in the Training Program.

Because chemical exposure levels present do not create a substantial possibility of immediate death, immediate serious illness or injury, or impair the ability to escape, positive pressure self-contained breathing apparatus or positive-pressure air-line respirators equipped with an escape air supply are not required.

## 7.0 ENVIRONMENTAL MONITORING

This section of the HASP describes how site worker exposures to hazardous substances will be monitored in compliance with *29 CFR 1910.120(b)(4)(ii)(E)* and *29 CFR 1926.65(b)(4)(ii)(E)*.

### 7.1 Air Monitoring Procedures

Exposures to airborne hazardous substances shall be fully characterized throughout site operations to ensure that exposure controls are effectively selected and modified as needed. Air monitoring shall be used to identify and quantify airborne levels of hazardous substances and safety and health hazards to determine the appropriate level of site worker protection needed on site. Air monitoring procedures shall be consistent with OSHA requirements in *29 CFR 1910.120(c)(6)* and *29 CFR 1926.65(c)(6)*.

Air monitoring shall be conducted using direct-reading instruments. Air monitoring includes:

- Initial monitoring prior to the beginning of SVI Study activities to identify conditions that may cause death or serious harm and to permit preliminary selection of site controls
- Periodic monitoring throughout SVI Study

### 7.2 Initial Monitoring Procedures

Upon initial entry, representative air monitoring shall be conducted to identify any IDLH condition, exposure over permissible exposure limits or published exposure levels, exposure over a radioactive material's dose limits, or other dangerous condition such as the presence of flammable atmospheres or oxygen-deficient environments.

### 7.3 Periodic Monitoring

Periodic monitoring shall be conducted when the possibility of an IDLH condition or flammable atmosphere has developed, or when there is indication that exposure may have risen over permissible exposure limits or published exposure levels since previous monitoring was conducted. Situations where it shall be considered that the possibility exposures have risen are as follows:

- When work begins on a portion of the Site that has not been previously monitored
- When contaminants other than those previously identified are being handled
- When a change in environmental conditions exist
- When site workers handle leaking drums or containers, or work in areas with obvious liquid contamination

- When site workers report or exhibit signs of exposure

#### **7.4 Direct-Reading Instrument Monitoring Procedures**

Direct-reading instrument monitoring will be used on this site as follows:

- VOCs by photoionization detector (PID)

Monitoring equipment calibration and maintenance procedures on this site are:

- Every morning

## 8.0 DECONTAMINATION

This HASP element describes procedures for decontaminating site workers and equipment when exiting the Exclusion Zone in compliance with *29 CFR 1910.120(b)(4)(ii)(G)* and *29 CFR 1926.65(b)(4)(ii)(G)*. This section also describes disposal of waste from decontamination processes. Site decontamination procedures are designed to achieve a safe, logical removal or neutralization of contaminants that may accumulate on site workers and/or equipment. The Site Supervisor is responsible for decontamination procedures at this site.

These procedures are intended to minimize site worker contact with contaminants and protect against the transfer of contamination to clean areas of the site and away from the site. They may also extend the useful life of personal protective equipment (PPE) by reducing the amount of time that contaminants contact and permeate or otherwise affect the surfaces of PPE.

Decontamination procedures shall be communicated to site workers and implemented before any site workers or equipment are permitted to enter areas on site where potential for exposure to hazardous substances exists.

Emergency decontamination procedures are detailed in Section 8, the Emergency Response Plan of this HASP.

The decontamination procedures described below are designed to meet the requirements of *29 CFR 1910.120(k)* and *29 CFR 1926.65(k)* and include site-specific information about:

- General and Specific Decontamination Procedures for Personnel and PPE
- General and Specific Decontamination Procedures for Equipment
- Location and Type of Site Decontamination Procedures
- Disposal of Residual Waste from Decontamination
- Monitoring the Effectiveness of Decontamination Procedures

### 8.1 General and Specific Decontamination Procedures for Site Workers and PPE

All site workers and PPE leaving a contaminated area shall be appropriately decontaminated. General decontamination guidelines for site workers and PPE include:

- Decontamination is required for all site workers exiting a contaminated area. Site workers may only re-enter uncontaminated areas after undergoing the decontamination procedures described in the next section.
- Protective clothing is decontaminated, cleaned, laundered, maintained and/or replaced as needed to ensure its effectiveness.
- PPE used at this site is decontaminated or prepared for proper disposal.

- The site requires and trains site workers that if their permeable clothing is splashed or becomes wetted with a hazardous substance, they will immediately exit the work zone, perform applicable decontamination procedures, shower, and change into uncontaminated clothing.

## **8.2 General and Specific Decontamination Procedures for Equipment**

All contaminated clothing and equipment leaving a contaminated area shall be appropriately disposed of or decontaminated. General decontamination guidelines for equipment include:

- Decontamination is required for all equipment exiting a contaminated area. Equipment may only re-enter uncontaminated areas after undergoing specific decontamination as described in the Job Hazard Analysis Worksheets.
- Particular attention is given to decontaminating tires, scoops, and other parts of heavy equipment that are directly exposed to contaminants and contaminated soil.

## **8.3 Location and Type of Site Decontamination Procedures**

Decontamination shall be performed in areas that will minimize the exposure of uncontaminated site workers or equipment to contaminated site workers or equipment. Decontamination on this site shall be conducted in the Contamination Reduction Zone. The Contamination Reduction Zone acts as a buffer between the Exclusion Zone and Support Zone. The location and design of decontamination stations minimize the spread of contamination beyond these stations.

## **8.4 Disposal of Waste from Decontamination**

Procedures for disposal of decontamination waste shall meet applicable local, State, and Federal regulations.

## **8.5 Monitoring the Effectiveness of Decontamination Procedures**

Decontamination procedures shall be monitored by a representative of Vektor Consultants, the Site Health and Safety Supervisor, to determine effectiveness. If procedures are found to be deficient, appropriate steps shall be taken to correct any deficiencies.

## 9.0 EMERGENCY RESPONSE PLAN

This section describes the site-specific Emergency Response Plan in compliance with *29 CFR 1910.120(b)(4)(ii)(H)* and *29 CFR 1926.65(b)(4)(ii)(H)*. Specifically, the Emergency Response Plan addresses potential emergencies at this site, procedures for responding to these emergencies, roles and responsibilities during emergency response, and training. This element also describes the provisions this site has made to coordinate its emergency response planning with other contractors on site and with off-site emergency response organizations.

This Emergency Response Plan shall be available for inspection and copying by site workers, their representatives, OSHA personnel, and other governmental agencies with relevant responsibilities as required by *29 CFR 1910.120(l)(1)(i)* and *29 CFR 1926.65(l)(1)(i)*.

In accordance with *29 CFR 1910.120(l)(3)(ii)* and *29 CFR 1926.65(l)(3)(ii)*, this Emergency Response Plan is a separate section of the HASP.

### 9.1 Pre-Emergency Planning

This Emergency Response Plan is compatible and integrated with the disaster, fire and/or emergency response plans of local, state, and federal agencies.

This Site has been evaluated for potential emergency occurrences based on site hazards, the tasks within the SVI Study, the site topography, and prevailing weather conditions.

### 9.2 Personnel Roles, Lines of Authority, and Communication

Anyone may activate the Emergency Response Plan; however, Saranda Alka (or designated alternate), Site Health and Safety Supervisor, is responsible for implementing the Emergency Response Plan and coordinating emergency response activities on this Site. Saranda Alka (or designated alternate) also provides specific direction for emergency action based upon information available regarding the incident and response capabilities, initiates emergency procedures including protection of the public, and ensures appropriate authorities are notified.

In accordance with *29 CFR 1910.38(a)* and *29 CFR 1926.35*, in the event of an emergency, site workers are evacuated and do not participate in emergency response activities.

This Site relies upon the off-site emergency response organizations listed in the Emergency Response Contact Information list to respond to site emergencies. These organizations are appropriately trained, staffed, and equipped to provide emergency response to this site.

These organizations are contacted at least annually to verify the accuracy of phone numbers and contact names.

Communication on this site will be conducted by the following methods:

- Face to face
- Cell phone
- Hand signals

### **9.3 Site Security and Control**

In case of an on-site emergency, site security and control for this site shall be provided by:

- Warning Signs
- Barrier Tape
- Locked Doors and Gates

### **9.4 Emergency Medical Treatment and First Aid**

Any site worker who requires medical care and/or is transferred to a medical facility shall be accompanied by this HASP and other applicable information to apprise caregivers of the chemicals and hazards to which the victim has potentially been exposed. The emergency medical care facility for this site is:

The Brooklyn Hospital Center  
121 Dekalb Avenue, Brooklyn NY 11201  
Tel: (718) 250-8000  
Open 24 Hours

The route to the facility is shown in on the map included in Attachment 2 of this HASP.

**FIGURE**  
**SITE LOCATION MAP**

---



**vEktor consultants**

t: +1.347.871.0750  
 f: +1.347.402.7735  
 e: info@vektorconsultants.com  
 www.vektorconsultants.com

Legend:  
 Approximate Site Location

Base Map provided by Environmental Data Resources - United Geological Survey 7.5 Minute Series Brooklyn Quadrangle 2013

Scale:

Figure No. 1

Figure Name: SITE LOCATION MAP

Report: HASP

Date: 3/18/2026

Drawn By: BN

Site Name: FORMER ANGLO CHEMICAL AND RUBBER SITE (C224337)

Site Address: 1-9 WYTHE AVENUE  
 BROOKLYN, NY 11249

**ATTACHMENT 1**

**HAZARDOUS SUBSTANCE PROFILES**

---

# • SAFETY DATA SHEET

Version 6.14  
Revision Date 11/06/2025  
Print Date 11/07/2025

## SECTION 1. IDENTIFICATION

### 1.1 Product identifiers

Product name : Ethylbenzene  
Product Number : 296848  
Brand : Sigma-Aldrich  
Index-No. : 601-023-00-4  
CAS-No. : 100-41-4

### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances  
Uses advised against : The product is being supplied under the TSCA R&D Exemption (40 CFR Section 720.36). It is the recipient's responsibility to comply with the requirements of the R&D exemption. The product may not be used for a non-exempt commercial purpose under TSCA unless appropriate consent is granted in writing by MilliporeSigma.

### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.  
3050 SPRUCE ST  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

### 1.4 Emergency telephone number

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-527-3887 CHEMTREC (International) 24 Hours/day; 7 Days/week

---

## SECTION 2. HAZARDS IDENTIFICATION

### GHS classification in accordance with the OSHA Hazard Communication Standard (29 CFR 1910.1200)

#### Hazards for the product as supplied

Flammable liquids : Category 2

Acute toxicity (Inhalation) : Category 4

Specific target organ toxicity - repeated exposure : Category 2 (hearing organs)

Aspiration hazard : Category 1

Short-term (acute) aquatic hazard : Category 2

Long-term (chronic) aquatic hazard : Category 3

### Other hazards

None known.

### GHS label elements

Hazard pictograms : 

Signal word : Danger

Hazard statements : H225 Highly flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H332 Harmful if inhaled.  
H373 May cause damage to organs (hearing organs) through prolonged or repeated exposure.  
H401 Toxic to aquatic life.  
H412 Harmful to aquatic life with long lasting effects.

Precautionary statements : **Prevention:**  
P210 Keep away from heat/ sparks/ open flames/ hot surfaces. No smoking.  
P233 Keep container tightly closed.  
P240 Ground/bond container and receiving equipment.  
P241 Use explosion-proof electrical/ ventilating/ lighting equipment.  
P242 Use only non-sparking tools.  
P243 Take precautionary measures against static discharge.  
P260 Do not breathe mist or vapours.  
P271 Use only outdoors or in a well-ventilated area.  
P273 Avoid release to the environment.  
P280 Wear protective gloves/ eye protection/ face protection.

**Response:**

P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER/ doctor.

P303 + P361 + P353 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/ shower.

P304 + P340 + P312 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/ doctor if you feel unwell.

P314 Get medical advice/ attention if you feel unwell.

P331 Do NOT induce vomiting.

P370 + P378 In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

**Storage:**

P403 + P235 Store in a well-ventilated place. Keep cool.

P405 Store locked up.

**Disposal:**

P501 Dispose of contents/ container to an approved waste disposal plant.

---

**SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS**

Substance / Mixture : Substance

CAS-No. : 100-41-4

**Components**

Chemical name	CAS No./Unique ID	Concentration (% w/w)	Trade secret
ethylbenzene	100-41-4*	>= 90 - <= 100	-

\* Indicates that the identifier is a CAS No.

Actual concentration is withheld as a trade secret

---

**SECTION 4. FIRST AID MEASURES**

General advice : Show this safety data sheet to the doctor in attendance.

If inhaled : After inhalation: fresh air. Immediately call in physician.  
If breathing stops: immediately apply artificial respiration, if necessary also oxygen.

In case of skin contact : In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower.

	Consult a physician.
In case of eye contact	: After eye contact: rinse out with plenty of water. Call in ophthalmologist. Remove contact lenses.
If swallowed	: After swallowing: caution if victim vomits. Risk of aspiration! Keep airways free. Pulmonary failure possible after aspiration of vomit. Call a physician immediately.
Most important symptoms and effects, both acute and delayed	: The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11
Protection of first-aiders	: For personal protection see section 8.
Notes to physician	: No data available

---

## SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media	: Water Carbon dioxide (CO <sub>2</sub> ) Foam Dry powder
Unsuitable extinguishing media	: For this substance/mixture no limitations of extinguishing agents are given.
Specific hazards during fire fighting	: Combustible.

Pay attention to flashback.

Vapours are heavier than air and may spread along floors.

Development of hazardous combustion gases or vapours possible in the event of fire.

Forms explosive mixtures with air at ambient temperatures.

Hazardous combustion products	: Carbon oxides
Specific extinguishing methods	: No data available
Further information	: Remove container from danger zone and cool with water. Prevent fire extinguishing water from contaminating surface water or the ground water system.
Special protective equipment for fire-fighters	: Stay in danger area only with self-contained breathing apparatus. Prevent skin contact by keeping a safe distance or by wearing suitable protective clothing.

---

## SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures	: Advice for non-emergency personnel: Do not breathe vapours, aerosols. Avoid substance contact. Ensure adequate ventilation. Keep away from heat and sources of ignition. Evacuate the danger area, observe emergency procedures, consult an expert. Advice for emergency responders: For personal protection see section 8.
Environmental precautions	: Do not let product enter drains. Risk of explosion.
Methods and materials for containment and cleaning up	: Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up carefully with liquid-absorbent material (e.g. Chemizorb®). Dispose of properly. Clean up affected area.

---

## SECTION 7. HANDLING AND STORAGE

For precautions see section 2.2.

Advice on protection against fire and explosion	: Keep away from open flames, hot surfaces and sources of ignition. Take precautionary measures against static discharge.
Advice on safe handling	: Work under hood. Do not inhale substance/mixture. Avoid generation of vapours/aerosols.

Further information on storage conditions : Keep container tightly closed in a dry and well-ventilated place.  
Keep away from heat and sources of ignition.

Storage class : 3, Flammable liquids

Recommended storage temperature : Recommended storage temperature see product label.

Further information on storage stability : hygroscopic

## SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### Ingredients with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
ethylbenzene	100-41-4	TWA	100 ppm 435 mg/m <sup>3</sup>	NIOSH REL
		ST	125 ppm 545 mg/m <sup>3</sup>	NIOSH REL
		TWA	100 ppm 435 mg/m <sup>3</sup>	OSHA Z-1

### Biological occupational exposure limits

Components	CAS-No.	Control parameters	Biological specimen	Sampling time	Permissible concentration	Basis
ethylbenzene	100-41-4	Sum of mandelic acid and phenyl glyoxylic acid	Urine	End of shift (As soon as possible after exposure ceases)	150 mg/g creatinine	ACGIH BEI

**Engineering measures** : No data available

### Personal protective equipment

Respiratory protection : required when vapours/aerosols are generated.  
Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection

system.

Recommended Filter type: : Filter A (acc. to DIN 3181) for vapours of organic compounds

The entrepreneur has to ensure that maintenance, cleaning and testing of respiratory protective devices are carried out according to the instructions of the producer. These measures have to be properly documented.

#### Hand protection

Material : Viton®  
Break through time : 480 min  
Glove thickness : 0.7 mm  
Protective index : Full contact  
Manufacturer : Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Material : Nitrile rubber  
Break through time : 10 min  
Glove thickness : 0.4 mm  
Protective index : Splash contact  
Manufacturer : Camatril® (KCL 730 / Aldrich Z677442, Size M)

Remarks : This recommendation applies only to the product stated in the safety data sheet, supplied by us and for the designated use. When dissolving in or mixing with other substances and under conditions deviating from those stated in EN 16523-1 please contact the supplier of CE-approved gloves (e.g. KCL GmbH, D-36124 Eichenzell, Internet: [www.kcl.de](http://www.kcl.de)).

Eye protection : Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).  
Safety glasses

Skin and body protection : Flame retardant antistatic protective clothing.

Hygiene measures : Change contaminated clothing. Preventive skin protection recommended. Wash hands after working with substance.

---

## SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance : liquid

Color : colourless

Odor	: aromatic
Odor Threshold	: No data available
pH	: No data available
Melting point/ range	: -138.8 °F / -94.9 °C (101.3 hPa) (ECHA)
Boiling point/boiling range	: 277.0 °F / 136.1 °C (1,013.3 hPa)
Flash point	: 71.6 °F / 22.0 °C  Method: closed cup
Evaporation rate	: No data available
Flammability (solid, gas)	: No data available
Flammability (liquids)	: No data available
Burning rate	: No data available
Self-ignition	: 806 °F / 430 °C 1,013 hPa
Upper explosion limit / Upper flammability limit	: Upper explosion limit 6.7 %(V)
Lower explosion limit / Lower flammability limit	: Lower explosion limit 1 %(V)
Vapor pressure	: 9.52 hPa (68 °F / 20 °C) Method: OECD Test Guideline 104
Relative vapour density	: No data available
Relative density	: 0.86 - 0.87 (68 °F / 20 °C)
Density	: 0.87 g/cm <sup>3</sup> (68 °F / 20 °C)
Solubility(ies)	
Water solubility	: 0.2 g/l slightly soluble (77 °F / 25 °C) Method: Regulation (EC) No. 440/2008, Annex, A.6
Partition coefficient: n- octanol/water	: log Pow: 3.6 (68 °F / 20 °C) pH: 7.84 Method: Regulation (EC) No. 440/2008, Annex, A.8

	GLP: yes Bioaccumulation is not expected.
Autoignition temperature	: 810 °F / 432 °C
Decomposition temperature	: No data available
Viscosity	
Viscosity, dynamic	: No data available
Viscosity, kinematic	: 0.773 mm <sup>2</sup> /s (68 °F / 20 °C) Method: OECD Test Guideline 114 GLP: yes
	0.641 mm <sup>2</sup> /s (104 °F / 40 °C) Method: OECD Test Guideline 114 GLP: yes
Flow time	: No data available
Explosive properties	: Not classified as explosive.
Oxidizing properties	: none
Surface tension	: 71.2 mN/m, 0.058 g/l, 73 °F / 23 °C, Surface tension, GLP: yes
Molecular weight	: 106.17 g/mol
Particle characteristics	
Particle size	: No data available

---

## SECTION 10. STABILITY AND REACTIVITY

Reactivity	: Vapours may form explosive mixture with air.
Chemical stability	: The product is chemically stable under standard ambient conditions (room temperature) .
Possibility of hazardous reactions	: Violent reactions possible with: Strong oxidizing agents rubber various plastics
Conditions to avoid	: Warming.
Incompatible materials	: No data available
Hazardous decomposition	: In the event of fire: see section 5

## SECTION 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male and female - 3,500 mg/kg

Remarks: (ECHA)

LC50 Inhalation - Rat - male - 4 h - 17.8 mg/l - vapour

Remarks: (ECHA)

LD50 Dermal - Rabbit - 15,433 mg/kg

Remarks: (RTECS)

#### Skin corrosion/irritation

Skin - Rabbit

Result: Moderate skin irritation - 24 h

Remarks: (ECHA)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation

Remarks: (ECHA)

#### Respiratory or skin sensitization

No data available

#### Germ cell mutagenicity

Test Type: Chromosome aberration test in vitro

Test system: Chinese hamster ovary cells

Metabolic activation: with and without metabolic activation

Method: OECD Test Guideline 473

Result: negative

Test Type: In vitro mammalian cell gene mutation test

Test system: mouse lymphoma cells

Metabolic activation: with and without metabolic activation

Method: OECD Test Guideline 476

Result: negative

Test Type: Micronucleus test

Species: Mouse

Cell type: Bone marrow

Application Route: Oral

Method: OECD Test Guideline 474

Result: negative

Test Type: unscheduled DNA synthesis assay

Species: Mouse

Application Route: Inhalation

Method: OECD Test Guideline 486

Result: negative

#### Carcinogenicity

Sigma-Aldrich - 296848

Page 10 of 17

- IARC: 2B - Group 2B: Possibly carcinogenic to humans (ethylbenzene)
- NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
- OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

May cause damage to organs through prolonged or repeated exposure.

- hearing organs

Remarks: Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

**Aspiration hazard**

Aspiration may cause pulmonary oedema and pneumonitis.

**11.2 Additional Information**

Repeated dose toxicity - Rat - male and female - Oral - 28 d - No observed adverse effect level - 75 mg/kg

RTECS: DA0700000

Central nervous system depression, Nausea, Headache, Vomiting, Ataxia., Tremors

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Systemic effects:

CNS disorders

Tiredness

Drowsiness

Dizziness

Convulsions

Headache

narcosis

Handle in accordance with good industrial hygiene and safety practice.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

## SECTION 12. ECOLOGICAL INFORMATION

### Ecotoxicity

#### Components:

##### **ethylbenzene:**

- Toxicity to fish : LC50 (Oncorhynchus mykiss (rainbow trout)): 4.2 mg/l  
End point: mortality  
Exposure time: 96 h  
Test Type: semi-static test  
Analytical monitoring: yes  
Method: OECD Test Guideline 203
- Toxicity to daphnia and other aquatic invertebrates : EC50 (Daphnia magna (Water flea)): 1.8 - 2.4 mg/l  
Exposure time: 48 h  
Test Type: static test  
Analytical monitoring: yes  
Method: US-EPA
- Toxicity to algae/aquatic plants : EC50 (Pseudokirchneriella subcapitata (green algae)): 3.6 mg/l  
Exposure time: 96 h  
Test Type: static test  
Analytical monitoring: yes  
Method: US-EPA  
GLP: yes
- Toxicity to microorganisms : EC50 (Photobacterium phosphoreum): 9.68 mg/l  
Exposure time: 30 min  
Remarks: (IUCLID)

### Ecotoxicology Assessment

- Acute aquatic toxicity : Toxic to aquatic life.
- Chronic aquatic toxicity : Harmful to aquatic life with long lasting effects.

### Persistence and degradability

#### Components:

##### **ethylbenzene:**

- Biodegradability : aerobic  
Inoculum: activated sludge  
Concentration: 22 mg/l  
Result: Readily biodegradable.  
Biodegradation: ca. 79 %  
Exposure time: 28 d  
Method: ISO 14593  
GLP: yes

## Bioaccumulative potential

### Components:

#### ethylbenzene:

- Bioaccumulation : Remarks: Due to the distribution coefficient n-octanol/water, accumulation in organisms is not expected.
- Partition coefficient: n-octanol/water : log Pow: 3.6 (68 °F / 20 °C)  
pH: 7.84  
Method: Regulation (EC) No. 440/2008, Annex, A.8  
GLP: yes  
Remarks: Bioaccumulation is not expected.

## Mobility in soil

### Components:

#### ethylbenzene:

- Distribution among environmental compartments : Adsorption/Soil  
Koc: 204, log Koc: 2.31  
Method: (experimental)  
Remarks: Moderately mobile in soils (Lit.)

## Other adverse effects

### Product:

- Ozone-Depletion Potential : Regulation: 40 CFR Protection of Environment; Part 82 Protection of Stratospheric Ozone - CAA Section 602 Class I Substances  
Remarks: This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).

---

## SECTION 13. DISPOSAL CONSIDERATIONS

### Disposal methods

- Waste from residues : Waste material must be disposed of in accordance with the national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself.

---

## SECTION 14. TRANSPORT INFORMATION

### International Regulations

#### IATA-DGR

Sigma-Aldrich - 296848

Page 13 of 17

UN/ID No. : UN 1175  
Proper shipping name : Ethylbenzene  
Class : 3  
Packing group : II  
Labels : Class 3 - Flammable liquids  
Packing instruction (cargo : 364  
aircraft)  
Packing instruction : 353  
(passenger aircraft)

**IMDG-Code**

UN number : UN 1175  
Proper shipping name : ETHYLBENZENE  
  
Class : 3  
Packing group : II  
Labels : 3  
EmS Code : F-E, S-D  
Marine pollutant : no

**Transport in bulk according to IMO instruments**

Not applicable for product as supplied.

**National Regulations**

**49 CFR Road**

UN/ID/NA number : UN 1175  
Proper shipping name : Ethylbenzene  
  
Class : 3  
Packing group : II  
Labels : Class 3 - Flammable liquids  
ERG Code : 130  
Marine pollutant : no

Poison Inhalation Hazard : No

**Special precautions for user**

The transport classification(s) provided herein are for informational purposes only, and solely based upon the properties of the unpackaged material as it is described within this Safety Data Sheet. Transportation classifications may vary by mode of transportation, package sizes, and variations in regional or country regulations.

---

**SECTION 15. REGULATORY INFORMATION**

**CERCLA Reportable Quantity**

Components	CAS-No.	Component RQ (lbs)	Calculated product RQ (lbs)
ethylbenzene	100-41-4	1000	1000
ethylbenzene	100-41-4	100	100 (F003)

**SARA 304 Extremely Hazardous Substances Reportable Quantity**

This material does not contain any components with a section 304 EHS RQ.

Sigma-Aldrich - 296848

Page 14 of 17

## SARA 302 Extremely Hazardous Substances Threshold Planning Quantity

This material does not contain any components with a section 302 EHS TPQ.

**SARA 311/312 Hazards** : Fire Hazard  
Chronic Health Hazard

**SARA 313** : The following components are subject to reporting levels established by SARA Title III, Section 313:

ethylbenzene	100-41-4	>= 90 - <= 100 %
--------------	----------	------------------

### Clean Air Act

This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).

The following chemical(s) are listed as HAP under the U.S. Clean Air Act, Section 112 (40 CFR 61):

ethylbenzene	100-41-4	>= 90 - <= 100 %
--------------	----------	------------------

This product does not contain any chemicals listed under the U.S. Clean Air Act Section 112(r) for Accidental Release Prevention (40 CFR 68.130, Subpart F).

The following chemical(s) are listed under the U.S. Clean Air Act Section 111 SOCM I Intermediate or Final VOC's (40 CFR 60.489):

ethylbenzene	100-41-4	>= 90 - <= 100 %
--------------	----------	------------------

### Clean Water Act

The following Hazardous Substances are listed under the U.S. CleanWater Act, Section 311, Table 116.4A:

ethylbenzene	100-41-4	>= 90 - <= 100 %
--------------	----------	------------------

The following Hazardous Chemicals are listed under the U.S. CleanWater Act, Section 311, Table 117.3:

ethylbenzene	100-41-4	>= 90 - <= 100 %
--------------	----------	------------------

This product contains the following toxic pollutants listed under the U.S. Clean Water Act Section 307

ethylbenzene	100-41-4	>= 90 - <= 100 %
--------------	----------	------------------

This product contains the following priority pollutants related to the U.S. Clean Water Act:

ethylbenzene	100-41-4	>= 90 - <= 100 %
--------------	----------	------------------

### US State Regulations

#### Massachusetts Right To Know

ethylbenzene	100-41-4
--------------	----------

#### Pennsylvania Right To Know

ethylbenzene	100-41-4
--------------	----------

#### Maine Chemicals of High Concern

Product does not contain any listed chemicals

#### Vermont Chemicals of High Concern

ethylbenzene	100-41-4
--------------	----------

#### Washington Chemicals of High Concern

ethylbenzene	100-41-4
--------------	----------

## California Prop. 65

WARNING: This product can expose you to chemicals including ethylbenzene, which is/are known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### The components of this product are reported in the following inventories:

TSCA : All substances listed as active on the TSCA inventory

### TSCA list

No substances are subject to a Significant New Use Rule.

No substances are subject to TSCA 12(b) export notification requirements.

---

## SECTION 16. OTHER INFORMATION

### Full text of other abbreviations

ACGIH BEI : ACGIH - Biological Exposure Indices (BEI)  
NIOSH REL : USA. NIOSH Recommended Exposure Limits  
OSHA Z-1 : USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants  
NIOSH REL / TWA : Time-weighted average concentration for up to a 10-hour workday during a 40-hour workweek  
NIOSH REL / ST : STEL - 15-minute TWA exposure that should not be exceeded at any time during a workday  
OSHA Z-1 / TWA : 8-hour time weighted average

AIIC - Australian Inventory of Industrial Chemicals; ASTM - American Society for the Testing of Materials; bw - Body weight; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CMR - Carcinogen, Mutagen or Reproductive Toxicant; DIN - Standard of the German Institute for Standardisation; DOT - Department of Transportation; DSL - Domestic Substances List (Canada); ECx - Concentration associated with x% response; EHS - Extremely Hazardous Substance; ELx - Loading rate associated with x% response; EmS - Emergency Schedule; ENCS - Existing and New Chemical Substances (Japan); ErCx - Concentration associated with x% growth rate response; ERG - Emergency Response Guide; GHS - Globally Harmonised System; GLP - Good Laboratory Practice; HMIS - Hazardous Materials Identification System; IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; IBC - International Code for the Construction and Equipment of Ships carrying Dangerous Chemicals in Bulk; IC50 - Half maximal inhibitory concentration; ICAO - International Civil Aviation Organization; IECSC - Inventory of Existing Chemical Substances in China; IMDG - International Maritime Dangerous Goods; IMO - International Maritime Organisation; ISHL - Industrial Safety and Health Law (Japan); ISO - International Organisation for Standardisation; KECI - Korea Existing Chemicals Inventory; LC50 - Lethal Concentration to 50 % of a test population; LD50 - Lethal Dose to 50% of a test population (Median Lethal Dose); MARPOL - International Convention for the Prevention of Pollution from Ships; MSHA - Mine Safety and Health Administration; n.o.s. - Not Otherwise Specified; NFPA - National Fire Protection Association; NO(A)EC - No Observed (Adverse) Effect Concentration; NO(A)EL - No Observed (Adverse) Effect Level; NOELR - No Observable Effect Loading Rate; NTP - National Toxicology Program; NZIoC - New Zealand Inventory of Chemicals; OECD - Organisation for Economic Co-operation and Development;

OPPTS - Office of Chemical Safety and Pollution Prevention; PBT - Persistent, Bioaccumulative and Toxic substance; PICCS - Philippines Inventory of Chemicals and Chemical Substances; (Q)SAR - (Quantitative) Structure Activity Relationship; RCRA - Resource Conservation and Recovery Act; REACH - Regulation (EC) No 1907/2006 of the European Parliament and of the Council concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals; RQ - Reportable Quantity; SADT - Self-Accelerating Decomposition Temperature; SARA - Superfund Amendments and Reauthorization Act; SDS - Safety Data Sheet; TCSI - Taiwan Chemical Substance Inventory; TECI - Thailand Existing Chemicals Inventory; TSCA - Toxic Substances Control Act (United States); UN - United Nations; UNRTDG - United Nations Recommendations on the Transport of Dangerous Goods; vPvB - Very Persistent and Very Bioaccumulative

The information is believed to be correct but is not exhaustive and will be used solely as a guideline, which is based on current knowledge of the chemical substance or mixture and is applicable to appropriate safety precautions for the product. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Copyright 2025 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

Revision Date : 11/06/2025

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact [mlsbranding@sial.com](mailto:mlsbranding@sial.com).

US / EN

# • SAFETY DATA SHEET

Version 6.20  
Revision Date 11/06/2025  
Print Date 11/07/2025

## SECTION 1. IDENTIFICATION

### 1.1 Product identifiers

Product name : Benzene  
Product Number : 319953  
Brand : SIGALD  
Index-No. : 601-020-00-8  
CAS-No. : 71-43-2

### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.  
3050 SPRUCE ST  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

### 1.4 Emergency telephone number

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-  
527-3887 CHEMTREC (International) 24  
Hours/day; 7 Days/week

---

## SECTION 2. HAZARDS IDENTIFICATION

### GHS classification in accordance with the OSHA Hazard Communication Standard (29 CFR 1910.1200)

#### Hazards for the product as supplied

Flammable liquids : Category 2  
Skin irritation : Category 2  
Eye irritation : Category 2A  
Germ cell mutagenicity : Category 1B

Carcinogenicity : Category 1A  
Specific target organ toxicity - repeated exposure : Category 1 (Blood)  
Aspiration hazard : Category 1  
Long-term (chronic) aquatic hazard : Category 3

**Other hazards**

None known.

**GHS label elements**

Hazard pictograms : 

Signal word : Danger

Hazard statements : H225 Highly flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H315 Causes skin irritation.  
H319 Causes serious eye irritation.  
H340 May cause genetic defects.  
H350 May cause cancer.  
H372 Causes damage to organs (Blood) through prolonged or repeated exposure.  
H412 Harmful to aquatic life with long lasting effects.

Precautionary statements : **Prevention:**  
P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and understood.  
P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.  
P233 Keep container tightly closed.  
P240 Ground and bond container and receiving equipment.  
P241 Use explosion-proof electrical/ ventilating/ lighting equipment.  
P242 Use non-sparking tools.  
P243 Take action to prevent static discharges.  
P260 Do not breathe mist or vapours.  
P264 Wash skin thoroughly after handling.  
P270 Do not eat, drink or smoke when using this product.  
P273 Avoid release to the environment.  
P280 Wear protective gloves/ protective clothing/ eye

protection/ face protection.

**Response:**

P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER/ doctor.

P303 + P361 + P353 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/ shower.

P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P308 + P313 IF exposed or concerned: Get medical advice/ attention.

P331 Do NOT induce vomiting.

P332 + P313 If skin irritation occurs: Get medical advice/ attention.

P337 + P313 If eye irritation persists: Get medical advice/ attention.

P370 + P378 In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

**Storage:**

P403 + P235 Store in a well-ventilated place. Keep cool.

P405 Store locked up.

**Disposal:**

P501 Dispose of contents/ container to an approved waste disposal plant.

---

**SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS**

Substance / Mixture : Substance

CAS-No. : 71-43-2

**Components**

Chemical name	CAS No./Unique ID	Concentration (% w/w)	Trade secret
benzene	71-43-2*	>= 80 - <= 100	TSC

\* Indicates that the identifier is a CAS No.

TSC- the actual concentration or concentration range is withheld as a trade secret

---

**SECTION 4. FIRST AID MEASURES**

General advice : Show this safety data sheet to the doctor in attendance.

If inhaled : After inhalation: fresh air. Call in physician.

In case of skin contact	: In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower. Consult a physician.
In case of eye contact	: After eye contact: rinse out with plenty of water. Call in ophthalmologist. Remove contact lenses.
If swallowed	: After swallowing: caution if victim vomits. Risk of aspiration! Keep airways free. Pulmonary failure possible after aspiration of vomit. Call a physician immediately.
Most important symptoms and effects, both acute and delayed	: The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11
Protection of first-aiders	: For personal protection see section 8.
Notes to physician	: No data available

---

## SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media	: Carbon dioxide (CO <sub>2</sub> ) Foam Dry powder
Unsuitable extinguishing media	: For this substance/mixture no limitations of extinguishing agents are given.  For this substance/mixture no limitations of extinguishing agents are given.
Specific hazards during fire fighting	: Flash back possible over considerable distance. Container explosion may occur under fire conditions.  Combustible.  Pay attention to flashback.  Vapours are heavier than air and may spread along floors.

Development of hazardous combustion gases or vapours possible in the event of fire.

Forms explosive mixtures with air at ambient temperatures.

Hazardous combustion products	:	Carbon oxides
Specific extinguishing methods	:	No data available
Further information	:	Remove container from danger zone and cool with water. Prevent fire extinguishing water from contaminating surface water or the ground water system.
Special protective equipment for fire-fighters	:	Stay in danger area only with self-contained breathing apparatus. Prevent skin contact by keeping a safe distance or by wearing suitable protective clothing.

---

## SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures	:	Advice for non-emergency personnel: Do not breathe vapours, aerosols. Avoid substance contact. Ensure adequate ventilation. Keep away from heat and sources of ignition. Evacuate the danger area, observe emergency procedures, consult an expert. Advice for emergency responders: For personal protection see section 8.
Environmental precautions	:	Do not let product enter drains. Risk of explosion.
Methods and materials for containment and cleaning up	:	Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up carefully with liquid-absorbent material (e.g. Chemizorb®). Dispose of properly. Clean up affected area.

## SECTION 7. HANDLING AND STORAGE

For precautions see section 2.2.

- Advice on protection against fire and explosion : Keep away from open flames, hot surfaces and sources of ignition.  
Take precautionary measures against static discharge.
- Advice on safe handling : Work under hood. Do not inhale substance/mixture.  
Avoid generation of vapours/aerosols.
- Further information on storage conditions : Keep container tightly closed in a dry and well-ventilated place.  
Keep away from heat and sources of ignition.  
Keep locked up or in an area accessible only to qualified or authorised persons.
- Storage class : 3, Flammable liquids
- Recommended storage temperature : Recommended storage temperature see product label.
- Packaging material : Suitable material: Any Metal Drum

## SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### Ingredients with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
benzene	71-43-2	TWA	0.5 ppm	ACGIH
		STEL	2.5 ppm	ACGIH
		TWA	10 ppm	OSHA Z-2
		CEIL	25 ppm	OSHA Z-2
		Peak	50 ppm	OSHA Z-2
		TWA	0.1 ppm	NIOSH REL
		ST	1 ppm	NIOSH REL

**Engineering measures** : No data available

### Personal protective equipment

Respiratory protection : required when vapours/aerosols are generated.  
Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection system.

Recommended Filter : Filter A-(P3)

SIGALD - 319953

Page 6 of 19

type:

The entrepreneur has to ensure that maintenance, cleaning and testing of respiratory protective devices are carried out according to the instructions of the producer. These measures have to be properly documented.

required when vapours/aerosols are generated.

Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection system.

Filter type ABEK

#### Hand protection

Material : Fluorinated rubber  
Break through time : 480 min  
Glove thickness : 0.7 mm  
Protective index : Full contact  
Manufacturer : Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Material : Fluorinated rubber  
Break through time : 480 min  
Glove thickness : 0.7 mm  
Protective index : Splash contact  
Manufacturer : Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Manufacturer : data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

Remarks : Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.  
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as

offering an approval for any specific use scenario.

- Eye protection : Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).  
Safety glasses
- Skin and body protection : Flame retardant antistatic protective clothing.
- Hygiene measures : Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

---

## SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

- Appearance : liquid
- Color : clear, colourless
- Odor : No data available
- Odor Threshold : No data available  
pH : No data available
- Melting point/ range : 41.9 °F / 5.5 °C  
Method: lit.
- Boiling point/boiling range : 176 °F / 80 °C  
Method: lit.
- Flash point : 12 °F / -11 °C  
(1,013.5 hPa)  
Method: DIN 51755 Part 1
- Evaporation rate : No data available
- Flammability (solid, gas) : No data available
- Flammability (liquids) : No data available
- Burning rate : No data available
- Self-ignition : 928 °F / 498 °C  
1,013.5 hPa
- Upper explosion limit /  
Upper flammability limit : Upper explosion limit  
8.0 %(V)
- Lower explosion limit / : Lower explosion limit

SIGALD - 319953

Page 8 of 19

Lower flammability limit	: 1.2 %(V)
Vapor pressure	: 100 hPa (68 °F / 20 °C)
Relative vapour density	: No data available
Relative density	: No data available
Density	: 0.874 g/cm <sup>3</sup> (77 °F / 25 °C) Method: lit.
Solubility(ies)	
Water solubility	: ca. 1.88 g/l soluble (74.3 °F / 23.5 °C) pH: 7
Partition coefficient: n-octanol/water	: log Pow: 2.13 (77 °F / 25 °C) pH: 7 Bioaccumulation is not expected. (ECHA)
Autoignition temperature	: 928 °F / 498 °C (1,013.5 hPa)
Decomposition temperature	: No data available
Viscosity	
Viscosity, dynamic	: No data available
Viscosity, kinematic	: 0.604 mm <sup>2</sup> /s (77 °F / 25 °C)
Flow time	: No data available
Explosive properties	: Not classified as explosive.
Oxidizing properties	: none
Molecular weight	: 78.11 g/mol
Particle characteristics	
Particle size	: No data available

---

## SECTION 10. STABILITY AND REACTIVITY

Reactivity	: Vapours may form explosive mixture with air.  Vapours may form explosive mixture with air.
Chemical stability	: The product is chemically stable under standard ambient conditions (room temperature) .  The product is chemically stable under standard

ambient conditions (room temperature) .

- Possibility of hazardous reactions : Exothermic reaction with:  
halogens  
Halogenated hydrocarbon  
in the presence of:  
Light metals  
Risk of explosion with:  
halogen-halogen compounds  
Nitric acid  
Boranes  
Ozone  
peroxi compounds  
perchlorates  
permanganic acid  
perchloryl fluoride  
Strong oxidizing agents  
Chlorine  
fluorides  
uranium hexafluoride  
Oxygen  
liquid  
Risk of ignition or formation of inflammable gases or  
vapours with:  
chromium(VI) oxide  
Fluorine  
nitryl compounds  
Oxygen  
oxyhalogenic compounds  
Violent reactions possible with:  
mineral acids  
sulfur
- Conditions to avoid : Warming.  
  
Warming.
- Incompatible materials : No data available
- Hazardous decomposition products : In the event of fire: see section 5

---

## SECTION 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male - > 2,000 mg/kg  
(OECD Test Guideline 401)  
Symptoms: Nausea

LD50 Oral - Rat - male and female - 3,002 mg/kg  
(OECD Test Guideline 401)

Symptoms: Risk of aspiration upon vomiting., Aspiration may cause pulmonary oedema and pneumonitis.

Inhalation: No data available

Symptoms: mucosal irritations

LD50 Dermal - Rabbit - 13,630 mg/kg

Remarks: (IUCLID)

No data available

### **Skin corrosion/irritation**

Skin - Rabbit

Result: irritating

(OECD Test Guideline 404)

Remarks: (ECHA)

### **Serious eye damage/eye irritation**

Eyes - Rabbit

Result: Irritating to eyes.

(OECD Test Guideline 405)

Remarks: (IUCLID)

Remarks: Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

### **Respiratory or skin sensitization**

Maximisation Test - Guinea pig

Result: negative

(OECD Test Guideline 406)

### **Germ cell mutagenicity**

May cause genetic defects.

Test Type: Ames test

Test system: Escherichia coli/Salmonella typhimurium

Metabolic activation: with and without metabolic activation

Method: OECD Test Guideline 471

Result: negative

Test Type: In vitro mammalian cell gene mutation test

Test system: mouse lymphoma cells

Metabolic activation: with and without metabolic activation

Method: OECD Test Guideline 476

Result: negative

Test Type: Chromosome aberration test in vitro

Test system: Chinese hamster lung cells

Metabolic activation: with and without metabolic activation

Method: OECD Test Guideline 473

Result: negative

Test Type: Mutagenicity (mammal cell test): micronucleus.

Species: Mouse

Cell type: Bone marrow

Application Route: inhalation (vapour)

Method: OECD Test Guideline 474

Result: positive

### **Carcinogenicity**

May cause cancer. Positive evidence from human epidemiological studies.

IARC: 1 - Group 1: Carcinogenic to humans (benzene)

NTP: Known - Known to be human carcinogen (benzene)

OSHA: OSHA specifically regulated carcinogen (benzene)

**Reproductive toxicity**

No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

Causes damage to organs through prolonged or repeated exposure.

- Blood

Remarks: Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

**Aspiration hazard**

Aspiration may cause pulmonary oedema and pneumonitis.

**11.2 Additional Information**

Repeated dose toxicity - Rat - male and female - Oral - 13 Weeks - No observed adverse effect level - 600 mg/kg

RTECS: CY1400000

Nausea, Dizziness, Headache, narcosis, Inhalation of high concentrations of benzene may have an initial stimulatory effect on the central nervous system characterized by exhilaration, nervous excitation and/or giddiness, depression, drowsiness, or fatigue. The victim may experience tightness in the chest, breathlessness, and loss of consciousness. Tremors, convulsions, and death due to respiratory paralysis or circulatory collapse can occur in a few minutes to several hours following severe exposures. Aspiration of small amounts of liquid immediately causes pulmonary edema and hemorrhage of pulmonary tissue. Direct skin contact may cause erythema. Repeated or prolonged skin contact may result in drying, scaling dermatitis, or development of secondary skin infections. The chief target organ is the hematopoietic system. Bleeding from the nose, gums, or mucous membranes and the development of purpuric spots, pancytopenia, leukopenia, thrombocytopenia, aplastic anemia, and leukemia may occur as the condition progresses. The bone marrow may appear normal, aplastic or hyperplastic, and may not correlate with peripheral blood-forming tissues. The onset of effects of prolonged benzene exposure may be delayed for many months or years after the actual exposure has ceased., Blood disorders

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

After absorption of large quantities:

narcosis  
respiratory arrest  
Convulsions

Possible damages:

Damage to:

Liver  
Kidney  
Central nervous system

Handle in accordance with good industrial hygiene and safety practice.

Stomach - Irregularities - Based on Human Evidence

---

## SECTION 12. ECOLOGICAL INFORMATION

### Ecotoxicity

#### Components:

##### **benzene:**

Toxicity to fish : LC50 (*Oryzias latipes* (Orange-red killifish)): > 100 mg/l  
End point: mortality  
Exposure time: 96 h  
Test Type: semi-static test  
Analytical monitoring: yes  
Method: OECD Test Guideline 203  
GLP: yes

Toxicity to daphnia and other aquatic invertebrates : EC50 (*Daphnia magna* (Water flea)): > 1,000 mg/l  
End point: Immobilization  
Exposure time: 48 h  
Test Type: semi-static test  
Analytical monitoring: yes  
Method: OECD Test Guideline 202  
GLP: yes

NOEC (*Daphnia magna* (Water flea)): > 1,000 mg/l  
End point: Immobilization  
Exposure time: 48 h  
Test Type: semi-static test  
Analytical monitoring: yes  
Method: OECD Test Guideline 202  
GLP: yes

Toxicity to algae/aquatic plants : ErC50 (*Pseudokirchneriella subcapitata* (green algae)): > 1,000 mg/l  
Exposure time: 72 h  
Test Type: static test  
Analytical monitoring: yes  
Method: OECD Test Guideline 201  
GLP: yes

NOEC (*Pseudokirchneriella subcapitata* (green algae)):

>= 1,000 mg/l  
Exposure time: 72 h  
Test Type: static test  
Analytical monitoring: yes  
Method: OECD Test Guideline 201  
GLP: yes

Toxicity to fish (Chronic toxicity) : NOEC (Pimephales promelas (fathead minnow)): 0.8 mg/l  
Exposure time: 32 d  
Test Type: flow-through test  
Analytical monitoring: yes  
Remarks: (ECHA)

Toxicity to daphnia and other aquatic invertebrates (Chronic toxicity) : LC50 (Daphnia magna (Water flea)): > 100 mg/l  
End point: mortality  
Exposure time: 21 d  
Test Type: semi-static test  
Analytical monitoring: yes  
Method: OECD Test Guideline 211  
GLP: yes

Toxicity to microorganisms : EC50 (activated sludge): > 1,000 mg/l  
Exposure time: 3 h  
Test Type: static test  
Method: OECD Test Guideline 209  
GLP: yes

### **Ecotoxicology Assessment**

Chronic aquatic toxicity : Harmful to aquatic life with long lasting effects.

### **Persistence and degradability**

#### **Components:**

##### **benzene:**

Biodegradability : aerobic  
Inoculum: activated sludge, non-adapted  
Concentration: 17 mg/l  
Result: Readily biodegradable.  
Biodegradation: 96 %  
Exposure time: 28 d  
Method: OECD Test Guideline 301F  
GLP: yes

### **Bioaccumulative potential**

#### **Components:**

##### **benzene:**

Bioaccumulation : Species: Leuciscus idus (Golden orfe)  
Bioconcentration factor (BCF): 10

Exposure time: 3 d  
Concentration: 0.05 mg/l

Partition coefficient: n-octanol/water : log Pow: 2.13 (77 °F / 25 °C)  
pH: 7  
Remarks: Bioaccumulation is not expected.  
(ECHA)

### **Mobility in soil**

No data available

### **Other adverse effects**

#### **Product:**

Ozone-Depletion Potential : Regulation: 40 CFR Protection of Environment; Part 82 Protection of Stratospheric Ozone - CAA Section 602 Class I Substances  
Remarks: This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).

#### **Components:**

##### **benzene:**

Additional ecological information : Endangers drinking-water supplies if allowed to enter soil or water.

Discharge into the environment must be avoided.

---

## **SECTION 13. DISPOSAL CONSIDERATIONS**

### **Disposal methods**

Waste from residues : Waste material must be disposed of in accordance with the national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself.

---

## **SECTION 14. TRANSPORT INFORMATION**

### **International Regulations**

#### **IATA-DGR**

UN/ID No. : UN 1114  
Proper shipping name : Benzene  
Class : 3  
Packing group : II  
Labels : Class 3 - Flammable liquids  
Packing instruction (cargo) : 364

SIGALD - 319953

Page 15 of 19

aircraft)  
Packing instruction : 353  
(passenger aircraft)

**IMDG-Code**

UN number : UN 1114  
Proper shipping name : BENZENE

Class : 3  
Packing group : II  
Labels : 3  
EmS Code : F-E, S-D  
Marine pollutant : no

**Transport in bulk according to IMO instruments**

Not applicable for product as supplied.

**National Regulations**

**49 CFR Road**

UN/ID/NA number : UN 1114  
Proper shipping name : Benzene

Class : 3  
Packing group : II  
Labels : Class 3 - Flammable liquids  
ERG Code : 130  
Marine pollutant : no

Poison Inhalation Hazard : No

**Special precautions for user**

The transport classification(s) provided herein are for informational purposes only, and solely based upon the properties of the unpackaged material as it is described within this Safety Data Sheet. Transportation classifications may vary by mode of transportation, package sizes, and variations in regional or country regulations.

---

**SECTION 15. REGULATORY INFORMATION**

**CERCLA Reportable Quantity**

Components	CAS-No.	Component RQ (lbs)	Calculated product RQ (lbs)
benzene	71-43-2	10	10
benzene	71-43-2	10	10 (D018)

**SARA 304 Extremely Hazardous Substances Reportable Quantity**

This material does not contain any components with a section 304 EHS RQ.

**SARA 302 Extremely Hazardous Substances Threshold Planning Quantity**

This material does not contain any components with a section 302 EHS TPQ.

**SARA 311/312 Hazards** : Fire Hazard  
Acute Health Hazard

Chronic Health Hazard

**SARA 313** : The following components are subject to reporting levels established by SARA Title III, Section 313:

benzene 71-43-2 >= 90 - <= 100 %

**Clean Air Act**

This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B). The following chemical(s) are listed as HAP under the U.S. Clean Air Act, Section 112 (40 CFR 61):

benzene 71-43-2 >= 90 - <= 100 %

This product does not contain any chemicals listed under the U.S. Clean Air Act Section 112(r) for Accidental Release Prevention (40 CFR 68.130, Subpart F).

The following chemical(s) are listed under the U.S. Clean Air Act Section 111 SOCM I Intermediate or Final VOC's (40 CFR 60.489):

benzene 71-43-2 >= 90 - <= 100 %

**Clean Water Act**

The following Hazardous Substances are listed under the U.S. CleanWater Act, Section 311, Table 116.4A:

benzene 71-43-2 >= 90 - <= 100 %

The following Hazardous Chemicals are listed under the U.S. CleanWater Act, Section 311, Table 117.3:

benzene 71-43-2 >= 90 - <= 100 %

This product contains the following toxic pollutants listed under the U.S. Clean Water Act Section 307

benzene 71-43-2 >= 90 - <= 100 %

This product contains the following priority pollutants related to the U.S. Clean Water Act:

benzene 71-43-2 >= 90 - <= 100 %

**US State Regulations**

**Massachusetts Right To Know**

benzene 71-43-2

**Pennsylvania Right To Know**

benzene 71-43-2

**Maine Chemicals of High Concern**

benzene 71-43-2

**Vermont Chemicals of High Concern**

benzene 71-43-2

**Washington Chemicals of High Concern**

benzene 71-43-2

**California Prop. 65**

WARNING: This product can expose you to chemicals including benzene, which is/are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



**The components of this product are reported in the following inventories:**

TSCA : All substances listed as active on the TSCA inventory

**TSCA list**

No substances are subject to a Significant New Use Rule.

No substances are subject to TSCA 12(b) export notification requirements.

---

**SECTION 16. OTHER INFORMATION**

**Full text of other abbreviations**

ACGIH	:	USA. ACGIH Threshold Limit Values (TLV)
NIOSH REL	:	USA. NIOSH Recommended Exposure Limits
OSHA Z-2	:	USA. Occupational Exposure Limits (OSHA) - Table Z-2
ACGIH / TWA	:	8-hour, time-weighted average
ACGIH / STEL	:	Short-term exposure limit
NIOSH REL / TWA	:	Time-weighted average concentration for up to a 10-hour workday during a 40-hour workweek
NIOSH REL / ST	:	STEL - 15-minute TWA exposure that should not be exceeded at any time during a workday
OSHA Z-2 / TWA	:	8-hour time weighted average
OSHA Z-2 / CEIL	:	Acceptable ceiling concentration
OSHA Z-2 / Peak	:	Acceptable maximum peak above the acceptable ceiling concentration for an 8-hr shift

AIIC - Australian Inventory of Industrial Chemicals; ASTM - American Society for the Testing of Materials; bw - Body weight; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CMR - Carcinogen, Mutagen or Reproductive Toxicant; DIN - Standard of the German Institute for Standardisation; DOT - Department of Transportation; DSL - Domestic Substances List (Canada); ECx - Concentration associated with x% response; EHS - Extremely Hazardous Substance; ELx - Loading rate associated with x% response; EmS - Emergency Schedule; ENCS - Existing and New Chemical Substances (Japan); ErCx - Concentration associated with x% growth rate response; ERG - Emergency Response Guide; GHS - Globally Harmonised System; GLP - Good Laboratory Practice; HMIS - Hazardous Materials Identification System; IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; IBC - International Code for the Construction and Equipment of Ships carrying Dangerous Chemicals in Bulk; IC50 - Half maximal inhibitory concentration; ICAO - International Civil Aviation Organization; IECSC - Inventory of Existing Chemical Substances in China; IMDG - International Maritime Dangerous Goods; IMO - International Maritime Organisation; ISHL - Industrial Safety and Health Law (Japan); ISO - International Organisation for Standardisation; KECI - Korea Existing Chemicals Inventory; LC50 - Lethal Concentration to 50 % of a test population; LD50 - Lethal Dose to 50% of a test population (Median Lethal Dose); MARPOL - International Convention for the Prevention of Pollution from Ships; MSHA - Mine Safety and Health Administration; n.o.s. - Not Otherwise Specified; NFPA - National Fire Protection Association; NO(A)EC - No Observed (Adverse) Effect Concentration; NO(A)EL - No Observed (Adverse) Effect Level; NOELR - No Observable Effect Loading Rate; NTP - National Toxicology Program; NZIoC - New Zealand Inventory of Chemicals; OECD - Organisation for Economic Co-operation and Development;

SIGALD - 319953

Page 18 of 19

OPPTS - Office of Chemical Safety and Pollution Prevention; PBT - Persistent, Bioaccumulative and Toxic substance; PICCS - Philippines Inventory of Chemicals and Chemical Substances; (Q)SAR - (Quantitative) Structure Activity Relationship; RCRA - Resource Conservation and Recovery Act; REACH - Regulation (EC) No 1907/2006 of the European Parliament and of the Council concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals; RQ - Reportable Quantity; SADT - Self-Accelerating Decomposition Temperature; SARA - Superfund Amendments and Reauthorization Act; SDS - Safety Data Sheet; TCSI - Taiwan Chemical Substance Inventory; TECI - Thailand Existing Chemicals Inventory; TSCA - Toxic Substances Control Act (United States); UN - United Nations; UNRTDG - United Nations Recommendations on the Transport of Dangerous Goods; vPvB - Very Persistent and Very Bioaccumulative

The information is believed to be correct but is not exhaustive and will be used solely as a guideline, which is based on current knowledge of the chemical substance or mixture and is applicable to appropriate safety precautions for the product. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Copyright 2025 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

Revision Date : 11/06/2025

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact [mlsbranding@sial.com](mailto:mlsbranding@sial.com).

US / EN

## SAFETY DATA SHEET

Creation Date 06-Oct-2009

Revision Date 25-Dec-2021

Revision Number 6

### 1. Identification

**Product Name** Cyclohexane

**Cat No. :** AC279590000; AC279590010; AC279590025

**CAS No** 110-82-7

**Synonyms** Hexahydrobenzene; Benzene hexahydride; Hexamethylene.

**Recommended Use** Laboratory chemicals.

**Uses advised against** Food, drug, pesticide or biocidal product use.

#### Details of the supplier of the safety data sheet

##### Company

Fisher Scientific Company  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

Acros Organics  
One Reagent Lane  
Fair Lawn, NJ 07410

**Emergency Telephone Number** For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11  
Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99  
**CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

### 2. Hazard(s) identification

#### Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids	Category 2
Skin Corrosion/Irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Central nervous system (CNS).	
Aspiration Toxicity	Category 1

#### Label Elements

**Signal Word**  
Danger

**Hazard Statements**  
Highly flammable liquid and vapor

May be fatal if swallowed and enters airways  
 Causes skin irritation  
 Causes eye irritation  
 May cause drowsiness or dizziness



### Precautionary Statements

#### Prevention

Wash face, hands and any exposed skin thoroughly after handling  
 Wear protective gloves/protective clothing/eye protection/face protection  
 Do not breathe dust/fume/gas/mist/vapors/spray  
 Use only outdoors or in a well-ventilated area  
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking  
 Keep container tightly closed  
 Ground/bond container and receiving equipment  
 Use explosion-proof electrical/ventilating/lighting equipment  
 Use only non-sparking tools  
 Take precautionary measures against static discharge  
 Keep cool

#### Response

Get medical attention/advice if you feel unwell

#### Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing  
 Call a POISON CENTER or doctor/physician if you feel unwell

#### Skin

If skin irritation occurs: Get medical advice/attention  
 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower  
 Wash contaminated clothing before reuse

#### Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing  
 If eye irritation persists: Get medical advice/attention

#### Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician  
 Do NOT induce vomiting

#### Fire

In case of fire: Use CO<sub>2</sub>, dry chemical, or foam for extinction

#### Storage

Store locked up  
 Store in a well-ventilated place. Keep container tightly closed

#### Disposal

Dispose of contents/container to an approved waste disposal plant

#### Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

## 3. Composition/Information on Ingredients

Component	CAS No	Weight %
Cyclohexane	110-82-7	>95

#### 4. First-aid measures

<b>Eye Contact</b>	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get medical attention.
<b>Skin Contact</b>	Wash off immediately with soap and plenty of water for at least 15 minutes. Get medical attention.
<b>Inhalation</b>	Remove to fresh air. If breathing is difficult, give oxygen. Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Aspiration into lungs can produce severe lung damage. Get medical attention immediately if symptoms occur.
<b>Ingestion</b>	Do NOT induce vomiting. Aspiration hazard. Call a physician or poison control center immediately.
<b>Most important symptoms and effects</b>	Difficulty in breathing. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting
<b>Notes to Physician</b>	Treat symptomatically

#### 5. Fire-fighting measures

<b>Suitable Extinguishing Media</b>	CO <sub>2</sub> , dry chemical, dry sand, alcohol-resistant foam. Water mist may be used to cool closed containers.
<b>Unsuitable Extinguishing Media</b>	Water may be ineffective, This material is lighter than water and insoluble in water. The fire could easily be spread by the use of water in an area where the water cannot be contained
<b>Flash Point</b>	-18 °C / -0.4 °F
<b>Method -</b>	CC (closed cup)
<b>Autoignition Temperature</b>	260 °C / 500 °F
<b>Explosion Limits</b>	
<b>Upper</b>	8.0 vol %
<b>Lower</b>	1.3 vol %
<b>Sensitivity to Mechanical Impact</b>	No information available
<b>Sensitivity to Static Discharge</b>	No information available

#### **Specific Hazards Arising from the Chemical**

Flammable. Risk of ignition. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Containers may explode when heated. Do not allow run-off from fire-fighting to enter drains or water courses.

#### **Hazardous Combustion Products**

Carbon monoxide (CO). Carbon dioxide (CO<sub>2</sub>).

#### **Protective Equipment and Precautions for Firefighters**

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

#### **NFPA**

<b>Health</b>	<b>Flammability</b>	<b>Instability</b>	<b>Physical hazards</b>
1	3	0	N/A

#### 6. Accidental release measures

<b>Personal Precautions</b>	Use personal protective equipment as required. Remove all sources of ignition. Take precautionary measures against static discharges.
-----------------------------	---

**Environmental Precautions** Avoid release to the environment. Do not flush into surface water or sanitary sewer system. See Section 12 for additional Ecological Information.

**Methods for Containment and Clean Up** Remove all sources of ignition. Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Use spark-proof tools and explosion-proof equipment. Take precautionary measures against static discharges.

## 7. Handling and storage

**Handling** Wear personal protective equipment/face protection. Ensure adequate ventilation. Do not breathe mist/vapors/spray. Avoid contact with skin, eyes or clothing. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. Use spark-proof tools and explosion-proof equipment. Take precautionary measures against static discharges.

**Storage.** Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat, sparks and flame. Flammables area. Incompatible Materials. Strong oxidizing agents.

## 8. Exposure controls / personal protection

### Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Cyclohexane	TWA: 100 ppm	(Vacated) TWA: 300 ppm (Vacated) TWA: 1050 mg/m <sup>3</sup> TWA: 300 ppm TWA: 1050 mg/m <sup>3</sup>	IDLH: 1300 ppm TWA: 300 ppm TWA: 1050 mg/m <sup>3</sup>	TWA: 100 ppm

### Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: NIOSH - National Institute for Occupational Safety and Health

**Engineering Measures** Ensure that eyewash stations and safety showers are close to the workstation location. Use explosion-proof electrical/ventilating/lighting equipment. Ensure adequate ventilation, especially in confined areas.

### Personal Protective Equipment

**Eye/face Protection** Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

**Skin and body protection** Wear appropriate protective gloves and clothing to prevent skin exposure.

**Respiratory Protection** Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

**Hygiene Measures** Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

Physical State	Liquid
Appearance	Colorless
Odor	sweet
Odor Threshold	No information available
pH	No information available
Melting Point/Range	6.5 °C / 43.7 °F

<b>Boiling Point/Range</b>	81 °C / 177.8 °F
<b>Flash Point</b>	-18 °C / -0.4 °F
<b>Method -</b>	CC (closed cup)
<b>Evaporation Rate</b>	6.1
<b>Flammability (solid,gas)</b>	Not applicable
<b>Flammability or explosive limits</b>	
<b>Upper</b>	8.0 vol %
<b>Lower</b>	1.3 vol %
<b>Vapor Pressure</b>	104 mbar @ 20 °C
<b>Vapor Density</b>	2.90
<b>Specific Gravity</b>	0.770
<b>Solubility</b>	Insoluble in water
<b>Partition coefficient; n-octanol/water</b>	No data available
<b>Autoignition Temperature</b>	260 °C / 500 °F
<b>Decomposition Temperature</b>	No information available
<b>Viscosity</b>	0.94 mPa.s @ 20 °C
<b>Molecular Formula</b>	C6 H12
<b>Molecular Weight</b>	84.15

## 10. Stability and reactivity

<b>Reactive Hazard</b>	None known, based on information available
<b>Stability</b>	Stable under normal conditions.
<b>Conditions to Avoid</b>	Incompatible products. Excess heat. Keep away from open flames, hot surfaces and sources of ignition.
<b>Incompatible Materials</b>	Strong oxidizing agents
<b>Hazardous Decomposition Products</b>	Carbon monoxide (CO), Carbon dioxide (CO <sub>2</sub> )
<b>Hazardous Polymerization</b>	Hazardous polymerization does not occur.
<b>Hazardous Reactions</b>	None under normal processing.

## 11. Toxicological information

### Acute Toxicity

#### Product Information

#### Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Cyclohexane	> 5000 mg/kg ( Rat )	> 2000 mg/kg ( Rabbit )	LC50 > 32880 mg/m <sup>3</sup> ( Rat ) 4 h

**Toxicologically Synergistic Products** No information available

#### Delayed and immediate effects as well as chronic effects from short and long-term exposure

**Irritation** Irritating to eyes and skin

**Sensitization** No information available

**Carcinogenicity** The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS No	IARC	NTP	ACGIH	OSHA	Mexico
Cyclohexane	110-82-7	Not listed	Not listed	Not listed	Not listed	Not listed

**Mutagenic Effects** No information available

**Reproductive Effects** No information available.

<b>Developmental Effects</b>	No information available.
<b>Teratogenicity</b>	No information available.
<b>STOT - single exposure</b>	Central nervous system (CNS)
<b>STOT - repeated exposure</b>	None known
<b>Aspiration hazard</b>	Category 1
<b>Symptoms / effects, both acute and delayed</b>	Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting
<b>Endocrine Disruptor Information</b>	No information available
<b>Other Adverse Effects</b>	The toxicological properties have not been fully investigated.

## 12. Ecological information

### Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Cyclohexane	EC50 >500 mg/L/72h	LC50: 48.87 - 68.76 mg/L, 96h static (Poecilia reticulata) LC50: 24.99 - 44.69 mg/L, 96h static (Lepomis macrochirus) LC50: 23.03 - 42.07 mg/L, 96h static (Pimephales promelas) LC50: 3.96 - 5.18 mg/L, 96h flow-through (Pimephales promelas)	EC50 = 85.5 mg/L 5 min EC50 = 93 mg/L 10 min	EC50 = 0.9 mg/l/48h

**Persistence and Degradability** Persistence is unlikely based on information available.

**Bioaccumulation/ Accumulation** No information available.

**Mobility** Will likely be mobile in the environment due to its volatility.

Component	log Pow
Cyclohexane	3.44

## 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Cyclohexane - 110-82-7	U056	-

## 14. Transport information

### DOT

<b>UN-No</b>	UN1145
<b>Proper Shipping Name</b>	CYCLOHEXANE
<b>Hazard Class</b>	3
<b>Packing Group</b>	II

### TDG

<b>UN-No</b>	UN1145
--------------	--------

<b>Proper Shipping Name</b>	CYCLOHEXANE
<b>Hazard Class</b>	3
<b>Packing Group</b>	II
<b>IATA</b>	
<b>UN-No</b>	UN1145
<b>Proper Shipping Name</b>	Cyclohexane
<b>Hazard Class</b>	3
<b>Packing Group</b>	II
<b>IMDG/IMO</b>	
<b>UN-No</b>	UN1145
<b>Proper Shipping Name</b>	Cyclohexane
<b>Hazard Class</b>	3
<b>Packing Group</b>	II

## 15. Regulatory information

### United States of America Inventory

Component	CAS No	TSCA	TSCA Inventory notification - Active-Inactive	TSCA - EPA Regulatory Flags
Cyclohexane	110-82-7	X	ACTIVE	-

**Legend:**

**TSCA** US EPA (TSCA) - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

**TSCA 12(b)** - Notices of Export      Not applicable

### International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Japan (ISHL), Australia (AICS), China (IECSC), Korea (KECL).

Component	CAS No	DSL	NDSL	EINECS	PICCS	ENCS	ISHL	AICS	IECSC	KECL
Cyclohexane	110-82-7	X	-	203-806-2	X	X	X	X	X	KE-18562

**KECL** - NIER number or KE number (<http://ncis.nier.go.kr/en/main.do>)

### U.S. Federal Regulations

#### SARA 313

Component	CAS No	Weight %	SARA 313 - Threshold Values %
Cyclohexane	110-82-7	>95	1.0

**SARA 311/312 Hazard Categories**      See section 2 for more information

#### CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Cyclohexane	X	1000 lb	-	-

**Clean Air Act**      Not applicable

**OSHA** - Occupational Safety and Health Administration      Not applicable

**CERCLA**      This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Cyclohexane	1000 lb	-

**California Proposition 65** This product does not contain any Proposition 65 chemicals.

#### U.S. State Right-to-Know Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Cyclohexane	X	X	X	-	X

#### U.S. Department of Transportation

Reportable Quantity (RQ): Y  
 DOT Marine Pollutant N  
 DOT Severe Marine Pollutant N

**U.S. Department of Homeland Security** This product does not contain any DHS chemicals.

#### Other International Regulations

**Mexico - Grade** Serious risk, Grade 3

#### Authorisation/Restrictions according to EU REACH

Component	REACH (1907/2006) - Annex XIV - Substances Subject to Authorization	REACH (1907/2006) - Annex XVII - Restrictions on Certain Dangerous Substances	REACH Regulation (EC 1907/2006) article 59 - Candidate List of Substances of Very High Concern (SVHC)
Cyclohexane	-	Use restricted. See item 57. (see link for restriction details) Use restricted. See item 75. (see link for restriction details)	-

<https://echa.europa.eu/substances-restricted-under-reach>

#### Safety, health and environmental regulations/legislation specific for the substance or mixture

Component	CAS No	OECD HPV	Persistent Organic Pollutant	Ozone Depletion Potential	Restriction of Hazardous Substances (RoHS)
Cyclohexane	110-82-7	Listed	Not applicable	Not applicable	Not applicable

Component	CAS No	Seveso III Directive (2012/18/EC) - Qualifying Quantities for Major Accident Notification	Seveso III Directive (2012/18/EC) - Qualifying Quantities for Safety Report Requirements	Rotterdam Convention (PIC)	Basel Convention (Hazardous Waste)
Cyclohexane	110-82-7	Not applicable	Not applicable	Not applicable	Not applicable

## 16. Other information

**Prepared By** Regulatory Affairs  
 Thermo Fisher Scientific  
 Email: EMSDS.RA@thermofisher.com

**Creation Date** 06-Oct-2009  
**Revision Date** 25-Dec-2021  
**Print Date** 25-Dec-2021  
**Revision Summary** This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

**Disclaimer**

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

**End of SDS**

# SAFETY DATA SHEET

Creation Date 27-Jul-2012

Revision Date 14-Mar-2026

Revision Number 7

This safety data sheet was created pursuant to the requirements of: US OSHA Hazard Communication Standard 2024 (29 CFR 1910.1200)

## 1. Identification

<b>Product Name</b>	n-Hexane
<b>Cat No. :</b>	H306-1; H306-4; H306-4LC; H306-SK4; H306-RS50; H306-RS200; XXH306ENTRS200; NC2669922
<b>CAS No</b>	110-54-3
<b>Synonyms</b>	Hexane; Hex
<b>Recommended Use</b>	Laboratory chemicals.
<b>Uses advised against</b>	Food, drug, pesticide or biocidal product use.

### Details of the supplier of the safety data sheet

#### Company

Fisher Scientific Company  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

#### **Emergency Telephone Number**

For information **US** call: 001-800-227-6701 / **Europe** call: +32 14 57 52 11  
Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99  
**CHEMTREC** Tel. No. **US**:001-800-424-9300 / **Europe**:001-703-527-3887  
CHEMTREC®, Inside the USA: 800-424-9300  
CHEMTREC®, Outside the USA: 001-703-527-3887

## 2. Hazard(s) identification

### Classification

This chemical is considered hazardous according to [US] OSHA (29 CFR 1910.1200, 2024)

Flammable liquids	Category 2
Skin Corrosion/Irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Reproductive Toxicity	Category 2
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Respiratory system, Central nervous system (CNS).	
Specific target organ toxicity - (repeated exposure)	Category 1
Target Organs - Heart, Liver, Blood, Central nervous system (CNS), Peripheral Nervous System (PNS).	
Aspiration Toxicity	Category 1

**Label Elements****Signal Word**

Danger

**Hazard Statements**

Highly flammable liquid and vapor

Causes skin irritation

Causes serious eye irritation

May be fatal if swallowed and enters airways

May cause drowsiness or dizziness

Suspected of damaging fertility

Causes damage to organs through prolonged or repeated exposure

**Precautionary Statements****Prevention**

Wear eye/face protection

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Wash face, hands and any exposed skin thoroughly after handling

Do not breathe dust/fume/gas/mist/vapors/spray

Use only outdoors or in a well-ventilated area

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking

Keep cool

Keep container tightly closed

Ground and bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting equipment

Wear protective gloves/protective clothing/eye protection/face protection

Take action to prevent static discharges

Use non-sparking tools

**Response**

IF exposed or concerned: Get medical attention/advice

**Inhalation**

IF INHALED: Remove person to fresh air and keep comfortable for breathing

**Skin**

If skin irritation occurs: Get medical advice/attention

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower

Take off contaminated clothing and wash before reuse

**Eyes**

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing

If eye irritation persists: Get medical advice/attention

**Ingestion**

IF SWALLOWED: Immediately call a POISON CENTER or doctor

Do NOT induce vomiting

**Fire**In case of fire: Use CO<sub>2</sub>, dry chemical, or foam to extinguish**Storage**

Store in a well-ventilated place. Keep container tightly closed

Store locked up

**Disposal**

Dispose of contents/container to an approved waste disposal plant

**Hazards not otherwise classified (HNOC)**

Toxic to aquatic life with long lasting effects

**Hazards classified under paragraph (d)(1)(ii) of 1910.1200**

No information available

WARNING. Reproductive Harm - <https://www.p65warnings.ca.gov/>.

### 3. Composition/information on Ingredients

Component	CAS No	Weight %
Hexane	110-54-3	> 95
2-Methylpentane	107-83-5	< 2.5
3-Methylpentane	96-14-0	< 1

### 4. First-aid measures

<b>General Advice</b>	If symptoms persist, call a physician.
<b>Eye Contact</b>	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get medical attention.
<b>Skin Contact</b>	Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists, call a physician.
<b>Inhalation</b>	Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if symptoms occur. Risk of serious damage to the lungs (by aspiration).
<b>Ingestion</b>	Clean mouth with water and drink afterwards plenty of water. Do NOT induce vomiting. Call a physician or poison control center immediately. If vomiting occurs naturally, have victim lean forward.
<b>Most important symptoms and effects</b>	. Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting
<b>Notes to Physician</b>	Treat symptomatically

### 5. Fire-fighting measures

<b>Suitable Extinguishing Media</b>	CO <sub>2</sub> , dry chemical, dry sand, alcohol-resistant foam. Water mist may be used to cool closed containers.
<b>Unsuitable Extinguishing Media</b>	Water may be ineffective, This material is lighter than water and insoluble in water. The fire could easily be spread by the use of water in an area where the water cannot be contained
<b>Flash Point</b>	-22 °C / -7.6 °F
<b>Method -</b>	No information available
<b>Autoignition Temperature</b>	223 °C / 433.4 °F
<b>Explosion Limits</b>	
<b>Upper</b>	7.5 vol %
<b>Lower</b>	1.1 vol %
<b>Sensitivity to Mechanical Impact</b>	No information available
<b>Sensitivity to Static Discharge</b>	No information available

**Specific Hazards Arising from the Chemical**

Flammable. Risk of ignition. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Containers may explode when heated.

**Hazardous Combustion Products**Carbon monoxide (CO). Carbon dioxide (CO<sub>2</sub>).**Protective Equipment and Precautions for Firefighters**

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

**NFPA**Health  
3Flammability  
3Instability  
0Physical hazards  
N/A**6. Accidental release measures****Personal Precautions**

Use personal protective equipment as required. Ensure adequate ventilation. Remove all sources of ignition. Take precautionary measures against static discharges.

**Environmental Precautions**

Do not flush into surface water or sanitary sewer system.

**Methods for Containment and Clean Up**

Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

**7. Handling and Storage****Handling**

Wear personal protective equipment/face protection. Do not get in eyes, on skin, or on clothing. Ensure adequate ventilation. Avoid ingestion and inhalation. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded. Take precautionary measures against static discharges.

**Storage.**

Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat, sparks and flame. Flammables area. Incompatible Materials. Strong oxidizing agents. Halogens.

**8. Exposure controls / personal protection****Exposure Guidelines**

Component	ACGIH TLV	OSHA PEL	NIOSH	Mexico OEL (TWA)
Hexane	TWA: 50 ppm Skin	(Vacated) TWA: 50 ppm (Vacated) TWA: 180 mg/m <sup>3</sup> TWA: 500 ppm TWA: 1800 mg/m <sup>3</sup>	IDLH: 1100 ppm REL = 50 ppm (TWA) REL = 180 mg/m <sup>3</sup> (TWA)	TWA: 50 ppm
2-Methylpentane	TWA: 500 ppm STEL: 1000 ppm			TWA: 500 ppm STEL: 1000 ppm
3-Methylpentane	TWA: 500 ppm STEL: 1000 ppm			TWA: 500 ppm STEL: 1000 ppm

**Legend**

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH: NIOSH - National Institute for Occupational Safety and Health

**Engineering Measures**

Use only under a chemical fume hood. Use explosion-proof electrical/ventilating/lighting equipment. Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location.

**Personal Protective Equipment****Eye/face Protection**

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

<b>Skin and body protection</b>	Wear appropriate protective gloves and clothing to prevent skin exposure.
<b>Respiratory Protection</b>	Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.
<b>Recommended Filter type:</b>	Organic gases and vapours filter. Type A. Brown. conforming to EN14387.
<b>Hygiene Measures</b>	Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

### Appearance

<b>Physical State</b>	Liquid
<b>Color</b>	Colorless
<b>Odor</b>	Petroleum distillates
<b>Odor Threshold</b>	No information available

### Property

	<u>Values</u>	<u>Remarks</u>	<u>Method</u>
<b>Melting Point/Range</b>	-95 °C / -139 °F		
<b>Softening Point</b>	No data available		
<b>Boiling Point/Range</b>	69 °C / 156.2 °F	@ 760 mmHg	
<b>Flash Point</b>	-22 °C / -7.6 °F	<b>Method</b> - No information available	
<b>Flammability (liquid)</b>	Highly flammable	On basis of test data	
<b>Flammability (solid,gas)</b>	Not applicable	Liquid	
<b>Explosion Limits</b>	<b>Lower</b> 1.1 vol% <b>Upper</b> 7.5 vol%		
<b>Autoignition Temperature</b>	223 °C / 433.4 °F		
<b>Decomposition Temperature</b>	No data available		
<b>pH</b>	No information available		
<b>Viscosity</b>	0.31 mPa s at 20 °C		
<b>Water Solubility</b>	Insoluble		
<b>Solubility in other solvents</b>	No information available		
<b>Partition Coefficient (n-octanol/water)</b>			
<b>Component</b>	<b>log Pow</b>		
Hexane	4.11		
<b>Vapor Pressure</b>	160 mbar @ 20 °C		
<b>Density / Specific Gravity</b>	0.659		
<b>Bulk Density</b>	Not applicable	Liquid	
<b>Vapor Density</b>	2.97 (Air = 1.0)	(Air = 1.0)	
<b>Particle characteristics</b>	Not applicable (liquid)		

### Other Information

<b>Molecular Formula</b>	C6 H14
<b>Molecular Weight</b>	86.18
<b>Explosive Properties</b>	Vapors may form explosive mixtures with air

## 10. Stability and reactivity

<b>Reactive Hazard</b>	None known, based on information available
<b>Stability</b>	Stable under normal conditions.
<b>Conditions to Avoid</b>	Incompatible products. Heat, flames and sparks. Exposure to light. Keep away from open flames, hot surfaces and sources of ignition.
<b>Incompatible Materials</b>	Strong oxidizing agents, Halogens

**Hazardous Decomposition Products** Carbon monoxide (CO), Carbon dioxide (CO<sub>2</sub>)

**Hazardous Polymerization** Hazardous polymerization does not occur.

**Hazardous Reactions** None under normal processing.

## 11. Toxicological information

### Information on expected route of exposure

**Inhalation** Not an expected route of exposure.  
**Ingestion** May be harmful if swallowed. Harmful if swallowed. Potential for aspiration if swallowed.  
**Eyes** Avoid contact with eyes. May cause irritation.  
**Skin** Avoid contact with skin. May cause irritation.

### Toxicology data for the components

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Hexane	LD50 = 25 g/kg ( Rat )	LD50 = 3000 mg/kg ( Rabbit )	LC50 = 48000 ppm ( Rat ) 4 h

**Toxicologically Synergistic Products** No information available

**(b) skin corrosion/irritation;** Category 2

**(c) serious eye damage/irritation;** Based on available data, the classification criteria are not met

**(d) respiratory or skin sensitization;**  
**Respiratory** Based on available data, the classification criteria are not met  
**Skin** Based on available data, the classification criteria are not met

**(e) germ cell mutagenicity;** Based on available data, the classification criteria are not met  
 Mutagenic effects have occurred in experimental animals

**(f) carcinogenicity;** Based on available data, the classification criteria are not met  
 The table below indicates whether each agency has listed any ingredient as a carcinogen

Component	CAS No	IARC	NTP	ACGIH	OSHA	Mexico
Hexane	110-54-3	Not listed	Not listed	Not listed	Not listed	Not listed
2-Methylpentane	107-83-5	Not listed	Not listed	Not listed	Not listed	Not listed
3-Methylpentane	96-14-0	Not listed	Not listed	Not listed	Not listed	Not listed

**(g) reproductive toxicity;** Category 2

**Reproductive Effects** Experiments have shown reproductive toxicity effects on laboratory animals.  
**Developmental Effects** Developmental effects have occurred in experimental animals.  
**Teratogenicity** Teratogenic effects have occurred in experimental animals.

**(h) STOT-single exposure;** Category 3  
**Results / Target organs** Central nervous system (CNS).

**(i) STOT-repeated exposure;** Category 1

**Target Organs** Skin, Respiratory system, Eyes, Central nervous system (CNS), Heart, Blood, Liver, Reproductive System, Peripheral Nervous System (PNS).

**(j) aspiration hazard;** Category 1

**Other Adverse Effects** Tumorigenic effects have been reported in experimental animals.

**Symptoms / effects, both acute and delayed** Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting.

**Other Adverse Effects** Tumorigenic effects have been reported in experimental animals.

**Endocrine Disrupting Properties** This product does not contain any known or suspected endocrine disruptors.

## 12. Ecological information

### Ecotoxicity

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Hexane	Not listed	LC50: 2.1 - 2.98 mg/L, 96h flow-through (Pimephales promelas)	Not listed	EC50: 3.87 mg/L/48h

**Persistence and Degradability** Persistence is unlikely based on information available.

**Bioaccumulation/ Accumulation** No information available.

**Mobility** Will likely be mobile in the environment due to its volatility.

Component	log Pow
Hexane	4.11

## 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

## 14. Transport information

### DOT

**UN-No** UN1208  
**Proper Shipping Name** Hexanes  
**Hazard Class** 3  
**Packing Group** II

### TDG

**UN-No** UN1208  
**Proper Shipping Name** HEXANES  
**Hazard Class** 3  
**Packing Group** II

### IATA

**UN-No** UN1208  
**Proper Shipping Name** Hexanes  
**Hazard Class** 3  
**Packing Group** II

### IMDG/IMO

**UN-No** UN1208  
**Proper Shipping Name** Hexanes  
**Hazard Class** 3

Packing Group

II

## 15. Regulatory Information

United States of America Inventory

Component	CAS No	TSCA	TSCA Inventory notification - Active-Inactive	TSCA - EPA Regulatory Flags
Hexane	110-54-3	X	ACTIVE	-
2-Methylpentane	107-83-5	X	ACTIVE	-
3-Methylpentane	96-14-0	X	ACTIVE	-

**Legend:**

TSCA US EPA (TSCA) - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

- - Not Listed

**TSCA - Per 40 CFR 751, Regulation of Certain Chemical Substances & Mixtures, Under TSCA Section 6(h) (PBT)** Not applicable

**TSCA 12(b)** - Notices of Export Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Japan (ISHL), Australia (AICS), China (IECSC), Korea (KECL).

Component	CAS No	DSL	NDSL	EINECS	PICCS	ENCS	ISHL	AICS	IECSC	KECL
Hexane	110-54-3	X	-	203-777-6	X	X	X	X	X	KE-18626
2-Methylpentane	107-83-5	X	-	203-523-4	X	X	X	X	X	KE-24699
3-Methylpentane	96-14-0	X	-	202-481-4	X	X	X	X	X	KE-24700

KECL - NIER number or KE number (<http://ncis.nier.go.kr/en/main.do>)

U.S. Federal Regulations**SARA 313**

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372.

Component	CAS No	Weight %	SARA 313 - Threshold Values %	SARA 313 - Reporting thresholds
Hexane	110-54-3	> 95	1.0 %	-

**SARA 311/312 Hazard Categories**

Should this product meet EPCRA 311/312 Tier reporting criteria at 40 CFR 370, refer to Section 2 of this SDS for appropriate classifications.

**CWA (Clean Water Act)** Not applicable

**Clean Air Act**

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Hexane	X		-

**OSHA** - Occupational Safety and Health Administration Not applicable

**CERCLA**

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355).

Component	Hazardous Substances RQs	CERCLA Extremely Hazardous Substances RQs	SARA Reportable Quantity (RQ)
Hexane	5000 lb	-	5000 lb 2270 kg

**California Proposition 65** This product contains the following Proposition 65 chemicals.

Component	CAS No	California Prop. 65	Prop 65 NSRL	Category
Hexane	110-54-3	Male Reproductive	-	Developmental

**U.S. State Right-to-Know Regulations**

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Hexane	X	X	X	X	X
2-Methylpentane	X	X	X	-	-
3-Methylpentane	X	-	X	-	-

**U.S. Department of Transportation**

Reportable Quantity (RQ): Y  
 DOT Marine Pollutant Y  
 DOT Severe Marine Pollutant N

**U.S. Department of Homeland Security** This product does not contain any DHS chemicals.

**Other International Regulations**

**Mexico - Grade** Serious risk, Grade 3

**Authorisation/Restrictions according to EU REACH**

Component	CAS No	REACH (1907/2006) - Annex XIV - Substances Subject to Authorization	REACH (1907/2006) - Annex XVII - Restrictions on Certain Dangerous Substances	REACH Regulation (EC 1907/2006) article 59 - Candidate List of Substances of Very High Concern (SVHC)
Hexane	110-54-3	-	Use restricted. See entry 75. (see link for restriction details)	SVHC candidate list - EC 203-777-6 - Specific target organ toxicity after repeated exposure Article 57(f) - human health
2-Methylpentane	107-83-5	-	Use restricted. See entry 75. (see link for restriction details)	-
3-Methylpentane	96-14-0	-	Use restricted. See entry 75. (see link for restriction details)	-

**REACH links**

<https://echa.europa.eu/substances-restricted-under-reach>  
<https://echa.europa.eu/candidate-list-table>

**Safety, health and environmental regulations/legislation specific for the substance or mixture**

Component	CAS No	OECD HPV	Persistent Organic Pollutant	Ozone Depletion Potential	Restriction of Hazardous Substances (RoHS)

Hexane	110-54-3	Listed	Not applicable	Not applicable	Not applicable
2-Methylpentane	107-83-5	Listed	Not applicable	Not applicable	Not applicable
3-Methylpentane	96-14-0	Listed	Not applicable	Not applicable	Not applicable

**Contains component(s) that meet a 'definition' of per & poly fluoroalkyl substance (PFAS)?**

Not applicable

**Other International Regulations**

Component	CAS No	Seveso III Directive (2012/18/EC) - Qualifying Quantities for Major Accident Notification	Seveso III Directive (2012/18/EC) - Qualifying Quantities for Safety Report Requirements	Rotterdam Convention (PIC)	Basel Convention (Hazardous Waste)
Hexane	110-54-3	Not applicable	Not applicable	Not applicable	Annex I - Y42
2-Methylpentane	107-83-5	Not applicable	Not applicable	Not applicable	Not applicable
3-Methylpentane	96-14-0	Not applicable	Not applicable	Not applicable	Not applicable

## 16. Other Information

**Prepared By**

Product stewardship (Regulatory Affairs)  
Thermo Fisher Scientific  
email - begel.sdsdesk@thermofisher.com

**Creation Date**

27-Jul-2012

**Revision Date**

14-Mar-2026

**Print Date**

14-Mar-2026

**Revision Summary**

Updated to the U.S. Department of Labor's Occupational Safety and Health Administration (OSHA) which published its Final Rule in the Federal Register revising the Hazard Communication Standard (HCS/HazCom), 29 CFR 1910.1200 (2024) (HCS §1910.1200, 2024), May 20, 2024, effective July 19, 2024.

**Disclaimer**

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

**End of SDS**

# SAFETY DATA SHEET

Creation Date 11-Jun-2009

Revision Date 19-Dec-2025

Revision Number 12

This safety data sheet was created pursuant to the requirements of: US OSHA Hazard Communication Standard 2024 (29 CFR 1910.1200)

## 1. Identification

**Product Name** Toluene

**Cat No. :** AC326980000; AC326980010; AC326980025; AC326981000;  
AC326982500

**CAS No** 108-88-3  
**Synonyms** Tol; Methylbenzene

**Recommended Use** Laboratory chemicals.  
**Uses advised against** Food, drug, pesticide or biocidal product use.

### Details of the supplier of the safety data sheet

#### Company

Fisher Scientific Company  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

Acros Organics  
One Reagent Lane  
Fair Lawn, NJ 07410

#### **Emergency Telephone Number**

For information **US** call: 001-800-227-6701 / **Europe** call: +32 14 57 52 11

Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99

**CHEMTREC** Tel. No. **US**:001-800-424-9300 / **Europe**:001-703-527-3887

## 2. Hazard(s) identification

### Classification

This chemical is considered hazardous according to [US] OSHA (29 CFR 1910.1200, 2024)

Flammable liquids	Category 2
Skin Corrosion/Irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Reproductive Toxicity	Category 2
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Respiratory system, Central nervous system (CNS).	
Specific target organ toxicity - (repeated exposure)	Category 2
Target Organs - Kidney, Liver, spleen, Blood, Neurological effects, Eyes, Ears.	
Aspiration Toxicity	Category 1

### Label Elements

**Signal Word**

Danger

**Hazard Statements**

Highly flammable liquid and vapor  
May be fatal if swallowed and enters airways  
Causes skin irritation  
Causes serious eye irritation  
May cause drowsiness or dizziness  
Suspected of damaging the unborn child  
May cause damage to organs through prolonged or repeated exposure

**Precautionary Statements****Prevention**

Obtain special instructions before use  
Do not handle until all safety precautions have been read and understood  
Wash face, hands and any exposed skin thoroughly after handling  
Wear eye/face protection  
Do not breathe dust/fume/gas/mist/vapors/spray  
Use only outdoors or in a well-ventilated area  
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking  
Keep container tightly closed  
Ground and bond container and receiving equipment  
Use explosion-proof electrical/ventilating/lighting equipment  
Keep cool  
Wear protective gloves/protective clothing/eye protection/face protection  
Take action to prevent static discharges  
Use non-sparking tools

**Response**

IF exposed or concerned: Get medical attention/advice

**Inhalation**

IF INHALED: Remove person to fresh air and keep comfortable for breathing

**Skin**

If skin irritation occurs: Get medical advice/attention  
IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower  
Take off contaminated clothing and wash before reuse

**Eyes**

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing  
If eye irritation persists: Get medical advice/attention

**Ingestion**

IF SWALLOWED: Immediately call a POISON CENTER or doctor  
Do NOT induce vomiting

**Fire**

In case of fire: Use CO<sub>2</sub>, dry chemical, or foam to extinguish

**Storage**

Store locked up  
Store in a well-ventilated place. Keep container tightly closed

**Disposal**

Dispose of contents/container to an approved waste disposal plant

**Hazards not otherwise classified (HNOC)**

Harmful to aquatic life with long lasting effects

---

**Hazards classified under paragraph (d)(1)(ii) of 1910.1200**

No information available

WARNING. Reproductive Harm - <https://www.p65warnings.ca.gov/>.**3. Composition/information on Ingredients**

Component	CAS No	Weight %
Toluene	108-88-3	<=100

**4. First-aid measures**

<b>General Advice</b>	If symptoms persist, call a physician.
<b>Eye Contact</b>	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get medical attention.
<b>Skin Contact</b>	Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists, call a physician.
<b>Inhalation</b>	Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if symptoms occur. Risk of serious damage to the lungs (by aspiration).
<b>Ingestion</b>	Clean mouth with water and drink afterwards plenty of water. Do NOT induce vomiting. Call a physician or poison control center immediately. If vomiting occurs naturally, have victim lean forward.
<b>Most important symptoms and effects</b>	Difficulty in breathing. Causes central nervous system depression: Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting
<b>Notes to Physician</b>	Treat symptomatically

**5. Fire-fighting measures**

<b>Suitable Extinguishing Media</b>	Water spray, carbon dioxide (CO <sub>2</sub> ), dry chemical, alcohol-resistant foam. Water mist may be used to cool closed containers.
<b>Unsuitable Extinguishing Media</b>	No information available
<b>Flash Point</b>	4 °C / 39.2 °F
<b>Method -</b>	No information available
<b>Autoignition Temperature</b>	535 °C / 995 °F
<b>Explosion Limits</b>	
<b>Upper</b>	7.1 vol %
<b>Lower</b>	1.1 vol %
<b>Oxidizing Properties</b>	Not oxidising
<b>Sensitivity to Mechanical Impact</b>	No information available
<b>Sensitivity to Static Discharge</b>	No information available

**Specific Hazards Arising from the Chemical**

Flammable. Containers may explode when heated. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back.

**Hazardous Combustion Products**

Carbon monoxide (CO). Carbon dioxide (CO<sub>2</sub>).

**Protective Equipment and Precautions for Firefighters**

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

**NFPA**

<b>Health</b> 3	<b>Flammability</b> 3	<b>Instability</b> 0	<b>Physical hazards</b> N/A
--------------------	--------------------------	-------------------------	--------------------------------

**6. Accidental release measures**

<b>Personal Precautions</b>	Use personal protective equipment as required. Ensure adequate ventilation. Remove all sources of ignition. Take precautionary measures against static discharges.
<b>Environmental Precautions</b>	Do not flush into surface water or sanitary sewer system.
<b>Methods for Containment and Clean Up</b>	Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

**7. Handling and Storage**

<b>Handling</b>	Wear personal protective equipment/face protection. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Ensure adequate ventilation. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded. Take precautionary measures against static discharges.
<b>Storage.</b>	Keep containers tightly closed in a dry, cool and well-ventilated place. Flammables area. Keep away from heat, sparks and flame. Incompatible Materials. Strong oxidizing agents. Strong acids. Strong bases. Halogenated compounds.

**8. Exposure controls / personal protection**

**Exposure Guidelines**

Component	ACGIH TLV	OSHA PEL	NIOSH	Mexico OEL (TWA)
Toluene	TWA: 20 ppm	(Vacated) TWA: 100 ppm (Vacated) TWA: 375 mg/m <sup>3</sup> Ceiling: 300 ppm (Vacated) STEL: 150 ppm (Vacated) STEL: 560 mg/m <sup>3</sup> TWA: 200 ppm	IDLH: 500 ppm REL = 100 ppm (TWA) REL = 375 mg/m <sup>3</sup> (TWA) STEL: 150 ppm STEL: 560 mg/m <sup>3</sup>	TWA: 20 ppm

Legend

ACGIH - American Conference of Governmental Industrial Hygienists  
 OSHA - Occupational Safety and Health Administration  
 NIOSH: NIOSH - National Institute for Occupational Safety and Health

<b>Engineering Measures</b>	Ensure that eyewash stations and safety showers are close to the workstation location. Use explosion-proof electrical/ventilating/lighting equipment. Ensure adequate ventilation, especially in confined areas.
-----------------------------	--

**Personal Protective Equipment**

<b>Eye/face Protection</b>	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
<b>Skin and body protection</b>	Wear appropriate protective gloves and clothing to prevent skin exposure.

<b>Respiratory Protection</b>	Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.
<b>Recommended Filter type:</b>	Organic gases and vapours filter. Type A. Brown. conforming to EN14387.
<b>Hygiene Measures</b>	Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

<b>Appearance</b>		
<b>Physical State</b>	Liquid	
<b>Color</b>	Colorless	
<b>Odor</b>	aromatic	
<b>Odor Threshold</b>	1.74 ppm	
<b>Property</b>	<b>Values</b>	<b>Remarks      • Method</b>
<b>Melting Point/Range</b>	-95 °C / -139 °F	
<b>Softening Point</b>	No data available	
<b>Boiling Point/Range</b>	111 °C / 231.8 °F	@ 760 mmHg
<b>Flash Point</b>	4 °C / 39.2 °F	<b>Method</b> - No information available
<b>Flammability (liquid)</b>	Highly flammable	On basis of test data
<b>Flammability (solid,gas)</b>	Not applicable	Liquid
<b>Explosion Limits</b>	<b>Lower</b> 1.2 vol%	
	<b>Upper</b> 7 vol%	
<b>Autoignition Temperature</b>	535 °C / 995 °F	
<b>Decomposition Temperature</b>	No data available	
<b>pH</b>	No information available	
<b>Viscosity</b>	0.6 mPa.s @ 20 °C	
<b>Water Solubility</b>	practically insoluble 0.5 g/L @ 20°C	
<b>Solubility in other solvents</b>	No information available	
<b>Partition Coefficient (n-octanol/water)</b>		
<b>Component</b>	<b>log Pow</b>	
Toluene	2.73	
<b>Vapor Pressure</b>	29 mbar @ 20 °C	
<b>Density / Specific Gravity</b>	0.866	
<b>Bulk Density</b>	Not applicable	Liquid
<b>Vapor Density</b>	3.1	(Air = 1.0)
<b>Particle characteristics</b>	Not applicable (liquid)	
<b>Other Information</b>		
<b>Molecular Formula</b>	C7 H8	
<b>Molecular Weight</b>	92.14	
<b>Explosive Properties</b>	Not explosive Vapors may form explosive mixtures with air	
<b>Oxidizing Properties</b>	Not oxidising	
<b>Evaporation Rate</b>	2.4 (Butyl acetate = 1.0)	

## 10. Stability and reactivity

<b>Reactive Hazard</b>	None known, based on information available
<b>Stability</b>	Stable under normal conditions.
<b>Conditions to Avoid</b>	Incompatible products. Excess heat. Keep away from open flames, hot surfaces and sources of ignition.
<b>Incompatible Materials</b>	Strong oxidizing agents, Strong acids, Strong bases, Halogenated compounds

**Hazardous Decomposition Products** Carbon monoxide (CO), Carbon dioxide (CO<sub>2</sub>)

**Hazardous Polymerization** Hazardous polymerization does not occur.

**Hazardous Reactions** None under normal processing.

## 11. Toxicological information

### Information on expected route of exposure

**Inhalation** Irritating to respiratory system. May be harmful if inhaled. May cause drowsiness and dizziness.

**Ingestion** Aspiration hazard if swallowed - can enter lungs and cause damage. May be harmful if swallowed. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea. Harmful if swallowed. Potential for aspiration if swallowed.

**Eyes** Irritating to eyes.

**Skin** Irritating to skin. Can be absorbed through skin. May be harmful in contact with skin.

### Toxicology data for the components

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Toluene	> 5000 mg/kg ( Rat )	12000 mg/kg ( Rabbit )	26700 ppm ( Rat ) 1 h

**Toxicologically Synergistic Products** No information available

**(b) skin corrosion/irritation;** Category 2  
**Test method** OECD 404  
**Test species** rabbit  
**Observational endpoint** Irritating to skin

**(c) serious eye damage/irritation;** Based on available data, the classification criteria are not met

**(d) respiratory or skin sensitization;**  
**Respiratory** Based on available data, the classification criteria are not met  
**Skin** Based on available data, the classification criteria are not met

**(e) germ cell mutagenicity;** Based on available data, the classification criteria are not met  
 Not mutagenic in AMES Test

**(f) carcinogenicity;** Based on available data, the classification criteria are not met  
 The table below indicates whether each agency has listed any ingredient as a carcinogen

Component	CAS No	IARC	NTP	ACGIH	OSHA	Mexico
Toluene	108-88-3	Not listed	Not listed	Not listed	Not listed	Not listed

**(g) reproductive toxicity;** Category 2

**Reproductive Effects** Experiments have shown reproductive toxicity effects on laboratory animals.  
**Developmental Effects** Developmental effects have occurred in experimental animals.  
**Teratogenicity** Possible risk of harm to the unborn child.

**(h) STOT-single exposure;** Category 3  
**Results / Target organs** Central nervous system (CNS).

<b>(i) STOT-repeated exposure;</b>	Category 2
<b>Target Organs</b>	Liver, Kidney, Central nervous system (CNS), Blood, spleen, Neuropsychological effects, Eyes, Ears.
<b>(j) aspiration hazard;</b>	Category 1
<b>Symptoms / effects, both acute and delayed</b>	Causes central nervous system depression. Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting.
<b>Other Adverse Effects</b>	The toxicological properties have not been fully investigated.
<b>Endocrine Disrupting Properties</b>	This product does not contain any known or suspected endocrine disruptors.

## 12. Ecological information

### Ecotoxicity

The product contains following substances which are hazardous for the environment. Contains a substance which is: Toxic to aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Toluene	EC50: = 12.5 mg/L, 72h static (Pseudokirchneriella subcapitata) EC50: > 433 mg/L, 96h (Pseudokirchneriella subcapitata)	50-70 mg/L LC50 96 h 5-7 mg/L LC50 96 h 15-19 mg/L LC50 96 h 28 mg/L LC50 96 h 12 mg/L LC50 96 h	EC50 = 19.7 mg/L 30 min	EC50: = 11.5 mg/L, 48h (Daphnia magna) EC50: 5.46 - 9.83 mg/L, 48h Static (Daphnia magna)

<b>Persistence and Degradability</b>	Persistence is unlikely
<b>Bioaccumulation/ Accumulation</b>	No information available.
<b>Mobility</b>	Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Toluene	2.73

## 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Toluene - 108-88-3	U220	-

## 14. Transport information

### DOT

<b>UN-No</b>	UN1294
<b>Proper Shipping Name</b>	TOLUENE
<b>Hazard Class</b>	3
<b>Packing Group</b>	II

### TDG

<b>UN-No</b>	UN1294
<b>Proper Shipping Name</b>	TOLUENE
<b>Hazard Class</b>	3
<b>Packing Group</b>	II

### IATA

<b>UN-No</b>	UN1294
--------------	--------

Proper Shipping Name	TOLUENE
Hazard Class	3
Packing Group	II
<b>IMDG/IMO</b>	
UN-No	UN1294
Proper Shipping Name	TOLUENE
Hazard Class	3
Packing Group	II

## 15. Regulatory Information

### United States of America Inventory

Component	CAS No	TSCA	TSCA Inventory notification - Active-Inactive	TSCA - EPA Regulatory Flags
Toluene	108-88-3	X	ACTIVE	-

#### Legend:

TSCA US EPA (TSCA) - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

**TSCA - Per 40 CFR 751, Regulation of Certain Chemical Substances & Mixtures, Under TSCA Section 6(h) (PBT)** Not applicable

**TSCA 12(b)** - Notices of Export Not applicable

### International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Japan (ISHL), Australia (AICS), China (IECSC), Korea (KECL).

Component	CAS No	DSL	NDSL	EINECS	PICCS	ENCS	ISHL	AICS	IECSC	KECL
Toluene	108-88-3	X	-	203-625-9	X	X	X	X	X	KE-33936

KECL - NIER number or KE number (<http://ncis.nier.go.kr/en/main.do>)

### U.S. Federal Regulations

#### SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372.

Component	CAS No	Weight %	SARA 313 - Threshold Values %	SARA 313 - Reporting thresholds
Toluene	108-88-3	<=100	1.0 %	-

#### SARA 311/312 Hazard Categories

Should this product meet EPCRA 311/312 Tier reporting criteria at 40 CFR 370, refer to Section 2 of this SDS for appropriate classifications.

#### CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Toluene	X	1000 lb	X	X

#### Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Toluene	X		-

OSHA - Occupational Safety and Not applicable

Health Administration

**CERCLA**

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355).

Component	Hazardous Substances RQs	CERCLA Extremely Hazardous Substances RQs	SARA Reportable Quantity (RQ)
Toluene	1000 lb	-	1000 lb 454 kg

**California Proposition 65**

This product contains the following Proposition 65 chemicals.

Component	CAS No	California Prop. 65	Prop 65 NSRL	Category
Toluene	108-88-3	Developmental	-	Developmental

**U.S. State Right-to-Know Regulations**

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Toluene	X	X	X	X	X

**U.S. Department of Transportation**

Reportable Quantity (RQ): Y  
 DOT Marine Pollutant N  
 DOT Severe Marine Pollutant N

**U.S. Department of Homeland Security**

This product does not contain any DHS chemicals.

**Other International Regulations****Mexico - Grade**

Serious risk, Grade 3

**Authorisation/Restrictions according to EU REACH**

Component	CAS No	REACH (1907/2006) - Annex XIV - Substances Subject to Authorization	REACH (1907/2006) - Annex XVII - Restrictions on Certain Dangerous Substances	REACH Regulation (EC 1907/2006) article 59 - Candidate List of Substances of Very High Concern (SVHC)
Toluene	108-88-3	-	Use restricted. See entry 48. (see link for restriction details) Use restricted. See entry 75. (see link for restriction details)	-

**REACH links**

<https://echa.europa.eu/substances-restricted-under-reach>

**Safety, health and environmental regulations/legislation specific for the substance or mixture**

Component	CAS No	OECD HPV	Persistent Organic Pollutant	Ozone Depletion Potential	Restriction of Hazardous Substances (RoHS)
Toluene	108-88-3	Listed	Not applicable	Not applicable	Not applicable

**Contains component(s) that meet a 'definition' of per & poly fluoroalkyl substance (PFAS)?**

Not applicable

**Other International Regulations**

Component	CAS No	Seveso III Directive (2012/18/EC) - Qualifying Quantities for Major Accident Notification	Seveso III Directive (2012/18/EC) - Qualifying Quantities for Safety Report Requirements	Rotterdam Convention (PIC)	Basel Convention (Hazardous Waste)
Toluene	108-88-3	Not applicable	Not applicable	Not applicable	Annex I - Y42

## 16. Other Information

<b>Prepared By</b>	Product stewardship (Regulatory Affairs) Thermo Fisher Scientific email - begel.sdsdesk@thermofisher.com
<b>Creation Date</b>	11-Jun-2009
<b>Revision Date</b>	19-Dec-2025
<b>Print Date</b>	19-Dec-2025
<b>Revision Summary</b>	Updated to the U.S. Department of Labor's Occupational Safety and Health Administration (OSHA) which published its Final Rule in the Federal Register revising the Hazard Communication Standard (HCS/HazCom), 29 CFR 1910.1200 (2024) (HCS §1910.1200, 2024), May 20, 2024, effective July 19, 2024.

**Disclaimer**

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

**End of SDS**

# SAFETY DATA SHEET

Creation Date 11-Jun-2009

Revision Date 19-Dec-2025

Revision Number 7

This safety data sheet was created pursuant to the requirements of: US OSHA Hazard Communication Standard 2024 (29 CFR 1910.1200)

## 1. Identification

**Product Name** Xylenes

**Cat No. :** AC422680000; AC422680025; AC422680040; AC422680200;  
AC422680250; AC422685000

**CAS No** 1330-20-7  
**Synonyms** Dimethylbenzene

**Recommended Use** Laboratory chemicals.  
**Uses advised against** Food, drug, pesticide or biocidal product use.

### Details of the supplier of the safety data sheet

#### Company

Fisher Scientific Company  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

Acros Organics  
One Reagent Lane  
Fair Lawn, NJ 07410

#### **Emergency Telephone Number**

For information **US** call: 001-800-227-6701 / **Europe** call: +32 14 57 52 11

Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99

**CHEMTREC** Tel. No. **US**:001-800-424-9300 / **Europe**:001-703-527-3887

## 2. Hazard(s) identification

### Classification

This chemical is considered hazardous according to [US] OSHA (29 CFR 1910.1200, 2024)

Flammable liquids	Category 3
Acute dermal toxicity	Category 4
Acute Inhalation Toxicity - Vapors	Category 4
Skin Corrosion/Irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Carcinogenicity	Category 2
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Respiratory system, Central nervous system (CNS).	
Specific target organ toxicity - (repeated exposure)	Category 2
Target Organs - Heart, Liver, Kidney, Ears.	
Aspiration Toxicity	Category 1

**Label Elements****Signal Word**

Danger

**Hazard Statements**

Flammable liquid and vapor  
May be fatal if swallowed and enters airways  
Harmful in contact with skin  
Causes skin irritation  
Causes serious eye irritation  
Harmful if inhaled  
May cause respiratory irritation  
Suspected of causing cancer  
May cause damage to organs through prolonged or repeated exposure

**Precautionary Statements****Prevention**

Keep cool  
Obtain special instructions before use  
Do not handle until all safety precautions have been read and understood  
Use only outdoors or in a well-ventilated area  
Wash face, hands and any exposed skin thoroughly after handling  
Wear eye/face protection  
Do not breathe dust/fume/gas/mist/vapors/spray  
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking  
Keep container tightly closed  
Ground and bond container and receiving equipment  
Use explosion-proof electrical/ventilating/lighting equipment  
Wear protective gloves/protective clothing/eye protection/face protection  
Take action to prevent static discharges  
Use non-sparking tools

**Response**

IF exposed or concerned: Get medical attention/advice

**Inhalation**

IF INHALED: Remove person to fresh air and keep comfortable for breathing

**Skin**

Call a POISON CENTER or doctor if you feel unwell  
If skin irritation occurs: Get medical advice/attention  
IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower  
Take off contaminated clothing and wash before reuse

**Eyes**

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing  
If eye irritation persists: Get medical advice/attention

**Ingestion**

IF SWALLOWED: Immediately call a POISON CENTER or doctor  
Do NOT induce vomiting

**Fire**In case of fire: Use CO<sub>2</sub>, dry chemical, or foam to extinguish**Storage**Store locked up

---

Store in a well-ventilated place. Keep container tightly closed

**Disposal**

Dispose of contents/container to an approved waste disposal plant

**Hazards not otherwise classified (HNOC)**

Harmful to aquatic life with long lasting effects

**Hazards classified under paragraph (d)(1)(ii) of 1910.1200**

No information available

WARNING. Cancer - <https://www.p65warnings.ca.gov/>.

### 3. Composition/information on Ingredients

Component	CAS No	Weight %
Xylenes (o-, m-, p- isomers)	1330-20-7	>75
Ethylbenzene	100-41-4	<25

### 4. First-aid measures

<b>Eye Contact</b>	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get medical attention.
<b>Skin Contact</b>	Wash off immediately with plenty of water for at least 15 minutes. Get medical attention.
<b>Inhalation</b>	Remove to fresh air. Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Get medical attention. Risk of serious damage to the lungs (by aspiration). If not breathing, give artificial respiration.
<b>Ingestion</b>	Aspiration hazard. Do NOT induce vomiting. Call a physician or poison control center immediately. If vomiting occurs naturally, have victim lean forward.
<b>Most important symptoms and effects</b>	Difficulty in breathing. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting
<b>Notes to Physician</b>	Treat symptomatically

### 5. Fire-fighting measures

<b>Suitable Extinguishing Media</b>	Water spray, carbon dioxide (CO <sub>2</sub> ), dry chemical, alcohol-resistant foam. Water mist may be used to cool closed containers.
<b>Unsuitable Extinguishing Media</b>	No information available
<b>Flash Point</b>	23 - 30 °C / 73.4 - 86 °F
<b>Method -</b>	No information available
<b>Autoignition Temperature</b>	460 °C / 860 °F
<b>Explosion Limits</b>	
<b>Upper</b>	No data available
<b>Lower</b>	No data available
<b>Sensitivity to Mechanical Impact</b>	No information available
<b>Sensitivity to Static Discharge</b>	No information available

**Specific Hazards Arising from the Chemical**

Flammable. Risk of ignition. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Containers may explode when heated. Thermal decomposition can lead to release of irritating gases and vapors. Keep product and

empty container away from heat and sources of ignition.

**Hazardous Combustion Products**

Carbon monoxide (CO). Carbon dioxide (CO<sub>2</sub>). Hydrocarbons. Aldehydes.

**Protective Equipment and Precautions for Firefighters**

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

**NFPA**

**Health**  
3

**Flammability**  
2

**Instability**  
0

**Physical hazards**  
N/A

**6. Accidental release measures**

**Personal Precautions**

Use personal protective equipment as required. Remove all sources of ignition. Take precautionary measures against static discharges. Avoid contact with skin, eyes or clothing. Ensure adequate ventilation. Keep people away from and upwind of spill/leak.

**Environmental Precautions**

Do not flush into surface water or sanitary sewer system. See Section 12 for additional Ecological Information. Avoid release to the environment. Collect spillage.

**Methods for Containment and Clean Up**

Remove all sources of ignition. Take precautionary measures against static discharges. Use spark-proof tools and explosion-proof equipment. Soak up with inert absorbent material. Keep in suitable, closed containers for disposal.

**7. Handling and Storage**

**Handling**

Wear personal protective equipment/face protection. Ensure adequate ventilation. Use spark-proof tools and explosion-proof equipment. Keep away from open flames, hot surfaces and sources of ignition. Take precautionary measures against static discharges. Do not get in eyes, on skin, or on clothing. Do not breathe mist/vapors/spray. Do not ingest. If swallowed then seek immediate medical assistance. Use only non-sparking tools.

**Storage.**

Keep container tightly closed in a dry and well-ventilated place. Keep away from heat, sparks and flame. Flammables area. Incompatible Materials. Strong oxidizing agents. Strong acids.

**8. Exposure controls / personal protection**

**Exposure Guidelines**

Component	ACGIH TLV	OSHA PEL	NIOSH	Mexico OEL (TWA)
Xylenes (o-, m-, p- isomers)	TWA: 20 ppm	(Vacated) TWA: 100 ppm (Vacated) TWA: 435 mg/m <sup>3</sup> (Vacated) STEL: 150 ppm (Vacated) STEL: 655 mg/m <sup>3</sup> TWA: 100 ppm TWA: 435 mg/m <sup>3</sup>		TWA: 100 ppm STEL: 150 ppm
Ethylbenzene	TWA: 20 ppm	(Vacated) TWA: 100 ppm (Vacated) TWA: 435 mg/m <sup>3</sup> (Vacated) STEL: 125 ppm (Vacated) STEL: 545 mg/m <sup>3</sup> TWA: 100 ppm TWA: 435 mg/m <sup>3</sup>	IDLH: 800 ppm REL = 100 ppm (TWA) REL = 435 mg/m <sup>3</sup> (TWA) STEL: 125 ppm STEL: 545 mg/m <sup>3</sup>	TWA: 20 ppm

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH: NIOSH - National Institute for Occupational Safety and Health

**Engineering Measures**

Ensure adequate ventilation, especially in confined areas. Use explosion-proof electrical/ventilating/lighting equipment. Ensure that eyewash stations and safety showers

are close to the workstation location.

### Personal Protective Equipment

<b>Eye/face Protection</b>	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
<b>Skin and body protection</b>	Wear appropriate protective gloves and clothing to prevent skin exposure.
<b>Respiratory Protection</b>	Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.
<b>Recommended Filter type:</b>	Organic gases and vapours filter. Type A. Brown. conforming to EN14387.
<b>Hygiene Measures</b>	Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

### Appearance

<b>Physical State</b>	Liquid
<b>Color</b>	Colorless
<b>Odor</b>	aromatic
<b>Odor Threshold</b>	No information available

### Property

	<u>Values</u>	<u>Remarks</u>	<u>Method</u>
<b>Melting Point/Range</b>	-34 °C / -29.2 °F		
<b>Softening Point</b>	No data available		
<b>Boiling Point/Range</b>	136 - 140 °C / 276.8 - 284 °F	@ 760 mmHg	
<b>Flash Point</b>	23 - 30 °C / 73.4 - 86 °F	<b>Method</b> - No information available	
<b>Flammability (liquid)</b>	Flammable	On basis of test data	
<b>Flammability (solid,gas)</b>	Not applicable	Liquid	
<b>Explosion Limits</b>	<b>Lower</b> 1.1 vol% <b>Upper</b> 7 vol%		
<b>Autoignition Temperature</b>	460 °C / 860 °F		
<b>Decomposition Temperature</b>	No data available		
<b>pH</b>	No information available		
<b>Viscosity</b>	0.6 mPa s @ 20 °C		
<b>Water Solubility</b>	0.2 mg/L (20°C)	practically insoluble	
<b>Solubility in other solvents</b>	No information available		
<b>Partition Coefficient (n-octanol/water)</b>			
<b>Component</b>	<b>log Pow</b>		
Xylenes (o-, m-, p- isomers)	3.15		
Ethylbenzene	3.6		
<b>Vapor Pressure</b>	8 mbar @ 20 °C		
<b>Density / Specific Gravity</b>	0.865		
<b>Bulk Density</b>	Not applicable	Liquid	
<b>Vapor Density</b>	No data available	(Air = 1.0)	
<b>Particle characteristics</b>	Not applicable (liquid)		

### Other Information

<b>Molecular Formula</b>	C8 H10
<b>Molecular Weight</b>	106.17
<b>Explosive Properties</b>	explosive air/vapour mixtures possible

## 10. Stability and reactivity

<b>Reactive Hazard</b>	None known, based on information available
<b>Stability</b>	Stable under normal conditions.
<b>Conditions to Avoid</b>	Incompatible products. Excess heat. Keep away from open flames, hot surfaces and sources of ignition.
<b>Incompatible Materials</b>	Strong oxidizing agents, Strong acids
<b>Hazardous Decomposition Products</b>	Carbon monoxide (CO), Carbon dioxide (CO <sub>2</sub> ), Hydrocarbons, Aldehydes
<b>Hazardous Polymerization</b>	Hazardous polymerization does not occur.
<b>Hazardous Reactions</b>	None under normal processing.

## 11. Toxicological information

### Information on expected route of exposure

<b>Inhalation</b>	Harmful by inhalation. May cause irritation of respiratory tract.
<b>Ingestion</b>	May be harmful if swallowed. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea. Ingestion may cause irritation to mucous membranes. Harmful if swallowed. Potential for aspiration if swallowed.
<b>Eyes</b>	Irritating to eyes. Contact with eyes may cause irritation.
<b>Skin</b>	Harmful in contact with skin. Irritating to skin. May cause eye/skin irritation.

### Toxicology data for the components

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Xylenes (o-, m-, p- isomers)	LD50 = 3500 mg/kg ( Rat )	LD50 > 4350 mg/kg ( Rabbit )	29.08 mg/L [MOE Risk Assessment Vol.1, 2002]
Ethylbenzene	3500 mg/kg ( Rat )	15400 mg/kg ( Rabbit )	17.2 mg/L ( Rat ) 4 h

<b>Toxicologically Synergistic Products</b>	No information available
<b>(b) skin corrosion/irritation;</b>	Category 2
<b>(c) serious eye damage/irritation;</b>	Category 2
<b>(d) respiratory or skin sensitization;</b>	
<b>Respiratory</b>	Based on available data, the classification criteria are not met
<b>Skin</b>	Based on available data, the classification criteria are not met
<b>(e) germ cell mutagenicity;</b>	Based on available data, the classification criteria are not met
<b>(f) carcinogenicity;</b>	Based on available data, the classification criteria are not met
	The table below indicates whether each agency has listed any ingredient as a carcinogen

Component	CAS No	IARC	NTP	ACGIH	OSHA	Mexico
Xylenes (o-, m-, p- isomers)	1330-20-7	Not listed	Not listed	Not listed	Not listed	Not listed
Ethylbenzene	100-41-4	Group 2B	Not listed	A3	X	A3

IARC (International Agency for Research on Cancer)

IARC (International Agency for Research on Cancer)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans

Group 2B - Possibly Carcinogenic to Humans

A1 - Known Human Carcinogen

ACGIH: (American Conference of Governmental Industrial

Hygienists)

A2 - Suspected Human Carcinogen

A3 - Animal Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

**(g) reproductive toxicity;** Based on available data, the classification criteria are not met**(h) STOT-single exposure;** Category 3**Results / Target organs** Respiratory system.**(i) STOT-repeated exposure;** Category 2**Target Organs** Heart, Liver, Kidney, Ears.**(j) aspiration hazard;** Category 1**Symptoms / effects, both acute and delayed** Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting.**Other Adverse Effects** The toxicological properties have not been fully investigated.**Endocrine Disrupting Properties** This product does not contain any known or suspected endocrine disruptors.

## 12. Ecological information

**Ecotoxicity**

Contains a substance which is: Toxic to aquatic organisms. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Xylenes (o-, m-, p- isomers)	Not listed	LC50: 30.26 - 40.75 mg/L, 96h static (Poecilia reticulata) LC50: = 780 mg/L, 96h semi-static (Cyprinus carpio) LC50: 23.53 - 29.97 mg/L, 96h static (Pimephales promelas) LC50: > 780 mg/L, 96h (Cyprinus carpio) LC50: 7.711 - 9.591 mg/L, 96h static (Lepomis macrochirus) LC50: = 19 mg/L, 96h (Lepomis macrochirus) LC50: 13.1 - 16.5 mg/L, 96h flow-through (Lepomis macrochirus) LC50: 13.5 - 17.3 mg/L, 96h (Oncorhynchus mykiss) LC50: 2.661 - 4.093 mg/L, 96h static (Oncorhynchus mykiss) LC50: = 13.4 mg/L, 96h flow-through (Pimephales promelas)	EC50 = 0.0084 mg/L 24 h	LC50: = 0.6 mg/L, 48h (Gammarus lacustris) EC50: = 3.82 mg/L, 48h (water flea)
Ethylbenzene	EC50: 2.6 - 11.3 mg/L, 72h static (Pseudokirchneriella subcapitata) EC50: 1.7 - 7.6 mg/L, 96h	LC50: 9.1 - 15.6 mg/L, 96h static (Pimephales promelas) LC50: 11.0 - 18.0 mg/L, 96h	EC50 = 9.68 mg/L 30 min EC50 = 96 mg/L 24 h	EC50: 1.8 - 2.4 mg/L, 48h (Daphnia magna)

	static (Pseudokirchneriella subcapitata) EC50: > 438 mg/L, 96h (Pseudokirchneriella subcapitata) EC50: = 4.6 mg/L, 72h (Pseudokirchneriella subcapitata)	static (Oncorhynchus mykiss) LC50: = 4.2 mg/L, 96h semi-static (Oncorhynchus mykiss) LC50: 7.55 - 11 mg/L, 96h flow-through (Pimephales promelas) LC50: = 32 mg/L, 96h static (Lepomis macrochirus) LC50: = 9.6 mg/L, 96h static (Poecilia reticulata)		
--	--	--	--	--

**Persistence and Degradability** Persistence is unlikely

**Bioaccumulation/ Accumulation** No information available.

**Mobility** . Is not likely mobile in the environment due its low water solubility. Will likely be mobile in the environment due to its volatility.

Component	log Pow
Xylenes (o-, m-, p- isomers)	3.15
Ethylbenzene	3.6

### 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Xylenes (o-, m-, p- isomers) - 1330-20-7	U239	-

### 14. Transport information

#### DOT

UN-No UN1307  
Proper Shipping Name XYLENES  
Hazard Class 3  
Packing Group III

#### TDG

UN-No UN1307  
Proper Shipping Name XYLENES  
Hazard Class 3  
Packing Group III

#### IATA

UN-No UN1307  
Proper Shipping Name XYLENES  
Hazard Class 3  
Packing Group III

#### IMDG/IMO

UN-No UN1307  
Proper Shipping Name XYLENES  
Hazard Class 3  
Packing Group III

### 15. Regulatory Information

#### United States of America Inventory

Component	CAS No	TSCA	TSCA Inventory notification - Active-Inactive	TSCA - EPA Regulatory Flags
Xylenes (o-, m-, p- isomers)	1330-20-7	X	ACTIVE	-

Ethylbenzene	100-41-4	X	ACTIVE	-
--------------	----------	---	--------	---

**Legend:**

TSCA US EPA (TSCA) - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

- - Not Listed

**TSCA - Per 40 CFR 751, Regulation of Certain Chemical Substances & Mixtures, Under TSCA Section 6(h) (PBT)** Not applicable

**TSCA 12(b)** - Notices of Export Not applicable

**International Inventories**

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Japan (ISHL), Australia (AICS), China (IECSC), Korea (KECL).

Component	CAS No	DSL	NDSL	EINECS	PICCS	ENCS	ISHL	AICS	IECSC	KECL
Xylenes (o-, m-, p- isomers)	1330-20-7	X	-	215-535-7	X	X	X	X	X	KE-35427
Ethylbenzene	100-41-4	X	-	202-849-4	X	X	X	X	X	KE-13532

KECL - NIER number or KE number (<http://ncis.nier.go.kr/en/main.do>)

**U.S. Federal Regulations****SARA 313**

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372.

Component	CAS No	Weight %	SARA 313 - Threshold Values %	SARA 313 - Reporting thresholds
Xylenes (o-, m-, p- isomers)	1330-20-7	>75	1.0 %	-
Ethylbenzene	100-41-4	<25	0.1 %	-

**SARA 311/312 Hazard Categories**

Should this product meet EPCRA 311/312 Tier reporting criteria at 40 CFR 370, refer to Section 2 of this SDS for appropriate classifications.

**CWA (Clean Water Act)**

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Xylenes (o-, m-, p- isomers)	X	100 lb	-	-
Ethylbenzene	X	1000 lb	X	X

**Clean Air Act**

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Xylenes (o-, m-, p- isomers)	X		-
Ethylbenzene	X		-

**OSHA** - Occupational Safety and Health Administration Not applicable

**CERCLA**

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355).

Component	Hazardous Substances RQs	CERCLA Extremely Hazardous Substances	SARA Reportable Quantity (RQ)

		RQs	
Xylenes (o-, m-, p- isomers)	100 lb	-	100 lb 45.4 kg
Ethylbenzene	1000 lb	-	1000 lb 454 kg

**California Proposition 65**

This product contains the following Proposition 65 chemicals.

Component	CAS No	California Prop. 65	Prop 65 NSRL	Category
Ethylbenzene	100-41-4	Carcinogen	54 µg/day 41 µg/day	Carcinogen

**U.S. State Right-to-Know Regulations**

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Xylenes (o-, m-, p- isomers)	X	X	X	X	X
Ethylbenzene	X	X	X	X	X

**U.S. Department of Transportation**

Reportable Quantity (RQ): Y  
 DOT Marine Pollutant N  
 DOT Severe Marine Pollutant N

**U.S. Department of Homeland Security**

This product does not contain any DHS chemicals.

**Other International Regulations****Mexico - Grade**

Serious risk, Grade 3

**Authorisation/Restrictions according to EU REACH**

Component	CAS No	REACH (1907/2006) - Annex XIV - Substances Subject to Authorization	REACH (1907/2006) - Annex XVII - Restrictions on Certain Dangerous Substances	REACH Regulation (EC 1907/2006) article 59 - Candidate List of Substances of Very High Concern (SVHC)
Xylenes (o-, m-, p- isomers)	1330-20-7	-	Use restricted. See entry 75. (see link for restriction details)	-
Ethylbenzene	100-41-4	-	-	-

**REACH links**

<https://echa.europa.eu/substances-restricted-under-reach>

**Safety, health and environmental regulations/legislation specific for the substance or mixture**

Component	CAS No	OECD HPV	Persistent Organic Pollutant	Ozone Depletion Potential	Restriction of Hazardous Substances (RoHS)
Xylenes (o-, m-, p- isomers)	1330-20-7	Listed	Not applicable	Not applicable	Not applicable
Ethylbenzene	100-41-4	Listed	Not applicable	Not applicable	Not applicable

**Contains component(s) that meet a 'definition' of per & poly fluoroalkyl substance (PFAS)?**

Not applicable

## Other International Regulations

Component	CAS No	Seveso III Directive (2012/18/EC) - Qualifying Quantities for Major Accident Notification	Seveso III Directive (2012/18/EC) - Qualifying Quantities for Safety Report Requirements	Rotterdam Convention (PIC)	Basel Convention (Hazardous Waste)
Xylenes (o-, m-, p- isomers)	1330-20-7	Not applicable	Not applicable	Not applicable	Annex I - Y42
Ethylbenzene	100-41-4	Not applicable	Not applicable	Not applicable	Not applicable

## 16. Other Information

<b>Prepared By</b>	Product stewardship (Regulatory Affairs) Thermo Fisher Scientific email - begel.sdsdesk@thermofisher.com
<b>Creation Date</b>	11-Jun-2009
<b>Revision Date</b>	19-Dec-2025
<b>Print Date</b>	19-Dec-2025
<b>Revision Summary</b>	Updated to the U.S. Department of Labor's Occupational Safety and Health Administration (OSHA) which published its Final Rule in the Federal Register revising the Hazard Communication Standard (HCS/HazCom), 29 CFR 1910.1200 (2024) (HCS §1910.1200, 2024), May 20, 2024, effective July 19, 2024.

**Disclaimer**

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

**End of SDS**

**ATTACHMENT 2**

**JOB HAZARDOUS ANALYSIS WORKSHEET**

---

JOB HAZARD ANALYSIS WORKSHEET			
<b>Phase Description:</b>	All Phases		
<b>Task or Operation:</b>	Indoor Air Sampling		
<b>Specific Location:</b>	Entire Site		
<b>Task or Operation Start Date(s):</b>	March 2026	<b>Task or Operation Duration:</b>	1 Day
<b>Date of Hazard Analysis:</b>	3/18/26		
<b>Job Hazard Analysis Developed by:</b>		BN	
<b>Job Hazard Analysis Reviewed by:</b>		BN	
POTENTIAL HAZARDS DURING THIS TASK and/or OPERATION			
Chemical*	Physical	Biological	Radiological
	<ul style="list-style-type: none"> <li>» Demolition Operations</li> <li>» Electrical</li> <li>» Excavation/Trenching Operations</li> <li>» Flammable Liquids - Storage and Use</li> <li>» Hand Tool Use</li> <li>» Heavy Manual Lifting/Moving</li> <li>» Hot Surfaces</li> <li>» Ladder Use</li> <li>» Material Handling</li> <li>» Noise (Sound Pressure Level), dBA</li> <li>» Scaffolding Use</li> <li>» Sharp Objects</li> <li>» Slips/Trips/Falls</li> <li>» Traffic - On or Near Site</li> <li>» Utilities (electrical, gas, water, etc.) - Overhead</li> <li>» Utilities (electrical, gas, water, etc.) - Underground</li> <li>» Welding/Cutting/Burn ing Operations</li> </ul>		
HAZARD CONTROL MEASURES USED DURING THIS TASK and/or OPERATION			
<b>Administrative Controls:</b>	Log In/Out Sheets		
<b>Engineering Controls:</b>	N/A		
<b>PPE Description:</b>	<b>Component</b>		<b>Description</b>
	<b>Level A Ensemble</b>		
	Boots, chemical-resistant, steel toe and shank		
	Gloves, inner, chemical-resistant		
	Gloves, outer, chemical-resistant		
	Supplied Air Respirator - air-line		
	Totally-encapsulating vapor tight chemical protective suit		
	<b>Level B Ensemble</b>		
	Boots, chemical-resistant, steel toe and shank		
	Disposable one-piece hooded chemical resistant splash clothing suit		
	Gloves, inner, chemical-resistant		
	Gloves, outer, chemical-resistant		

**ATTACHMENT 3**  
**DIRECTIONS TO HOSPITAL**

---



1 Wythe Ave, Brooklyn, NY 11249 to The Brooklyn Hospital Ctr, 121 Dekalb Ave, Brooklyn, NY 11201 Drive 3.5 miles, 31 min



Map data ©2026 Google 200 ft

**1 Wythe Ave**  
Brooklyn, NY 11249

- ↑ 1. Head toward N 15th St  
\_\_\_\_\_ 1.6 mi
- ↘ 2. Turn right onto Wilson St  
\_\_\_\_\_ 272 ft
- ↙ 3. Turn left at the 1st cross street onto Kent Ave  
\_\_\_\_\_ 0.3 mi
- ↘ 4. Turn right onto Williamsburg St W  
\_\_\_\_\_ 0.3 mi
- ↑ 5. Continue onto Park Ave  
\_\_\_\_\_ 0.4 mi
- ↙ 6. Turn left onto Clermont Ave  
\_\_\_\_\_ 0.5 mi
- ↘ 7. Turn right onto Dekalb Ave  
\_\_\_\_\_ 0.4 mi

**The Brooklyn Hospital Ctr**  
121 Dekalb Ave, Brooklyn, NY 11201