



Interim Remedial Measure Work Plan

94-17 63rd Drive
Rego Park, New York

July 3, 2019

Prepared for:

Arbern Queens Commercial Properties LLC
725 Church Street
Brooklyn, New York 11218

Prepared by:

**Roux Environmental Engineering
and Geology, D.P.C.**
209 Shafter Street
Islandia, New York 11749

Table of Contents

1. Introduction	1
1.1 Objectives and Scope of the IRM Work Plan	1
1.2 Certification	2
2. Site Background	3
2.1 Site Description and History	3
2.1.1 Site Operations	4
2.1.2 Topography/Hydrogeology	4
2.2 Summary of Environmental Conditions	4
2.2.1 Previous Environmental Sampling	4
3. Scope of Work	7
3.1 Mobilization and Site Preparation	7
3.2 SSDS Installation	7
3.3 SSDS Startup and Testing	8
3.4 SSDS Operation, Maintenance and Monitoring (O, M &M)	9
3.4.1 System Operation: Routine Operation Procedures	9
3.4.2 System Operation: Routine Equipment Maintenance	9
3.4.3 System Operation: Non-Routine Equipment Maintenance	10
3.5 Waste Disposal	10
3.6 Documentation	10
4. Soil/Materials Management Plan	11
4.1 Soil Screening Methods	11
4.2 Containerization of Waste	11
4.3 Characterization of Excavated Materials	11
4.4 Materials Excavation and Load Out	11
4.5 Contingency Plan	11
4.6 Community Air Monitoring Plan (CAMP)	12
4.7 Odor, Dust, and Nuisance Control Plan	12
4.7.1 Odor Control Plan	12
4.7.2 Dust Control Plan	12
4.7.3 Other Nuisances	12
5. Reporting	13
5.1 Daily Reporting During Site Activities	13
5.2 Construction Completion Report (CCR)	13
6. IRM Implementation Schedule	14

Table

1. Summary of Volatile Organic Compounds in Air and Soil Vapor at Site (Embedded)
2. Sub-Slab Soil Vapor/Indoor Air CVOC Concentrations at Adjacent Property (Embedded)

Table of Contents (Continued)

Figures

1. Site Location Map
2. Site Plan
3. Summary of NYSDOH Decision Matrix CVOCs in Soil Vapor and Indoor Air

Appendices *(Provided on CD in Bound Copy)*

- A. New York State Department of Health Soil Vapor/Indoor Air Matrices
- B. Division of Air Resources (DAR 1) Screening Analysis
- C. Sub-Slab Depressurization System Operations and Maintenance Log
- D. Health and Safety Plan

Drawing

1. Sub-Slab Depressurization System Plan and Details

1. Introduction

Roux Environmental Engineering and Geology, D.P.C. (Roux), has prepared this Interim Remedial Measure (IRM) Work Plan on behalf of Arbern Queens Commercial Properties LLC (Arbern) to detail the scope of work for the installation of an active sub-slab depressurization system (SSDS) beneath portions of the existing building located at 94-17 63rd Drive, Rego Park, New York (Site). A Site location map is provided on Figure 1 and a Site Plan is provided on Figure 2.

The Site is currently in the process of applying for entry into the Brownfield Cleanup Program (BCP) and will be applying as a Participant. This IRM Work Plan is anticipated on being completed in parallel with the administration of the BCP application. The sub-slab soil vapor and indoor air impacts are in exceedance of the New York State Department of Health (NYSDOH) decision matrices, which are included in the NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, dated October 2006 and updated in May 2017. The extent of known impacts exceeding applicable criteria (discussed in Section 2), are shown on Figure 3. The observed impacts are likely due to undocumented releases of dry-cleaning chemicals from the former Dalk Cleaners (former Cleaners) tenant space (94-17 63rd Drive – currently vacant). Additionally, there are known impacts on the adjacent building to the south, 94-15 63rd Drive, that is currently assumed to be associated with the Site contamination. The IRM scope will address the Site and the adjacent parcel as necessary.

This IRM Work Plan has been prepared in accordance with New York State Department of Environmental Conservation (NYSDEC) procedures set forth in the document titled DER-10 Technical Guidance for Site Investigation and Remediation, dated May 2010, and complies with all applicable Federal, State and local laws, regulations, and requirements.

1.1 Objectives and Scope of the IRM Work Plan

The proposed IRM will retrofit portions of the existing commercial building, shown on Figure 2, with a SSDS capable of creating negative pressure under the buildings and collecting potentially contaminated vapor for subsequent discharge to the atmosphere above the roof of the Site building. This IRM is a component of the overall investigation and remediation of the Site and is intended to proactively address soil vapor intrusion issues while the Site undergoes subsequent assessment. Additional remedial measures may be required after formal acceptance into the BCP, and will be based upon the results of a future Remedial Investigation (RI), which will be submitted separately.

The remainder of this IRM Work Plan is organized as follows:

- Section 2: Site Background
- Section 3: Scope of Work
- Section 4: Soils/Materials Management Plan
- Section 5: Reporting
- Section 6: IRM Work Plan Implementation Schedule

1.2 Certification


I, David Kaiser, certify that I am currently a New York State registered professional engineer as defined in 6 NYCRR Part 375 and that this Interim Remedial Measure Work Plan was prepared in accordance with all applicable statutes and regulations and in substantial conformance with the DER-10.

David Kaiser

NYS Professional Engineer # 097317

June 28, 2019

Date



Signature

2. Site Background

This section provides relevant Site background information.

2.1 Site Description and History

Property Location	
Property Name	94-17 63 rd Drive, Rego Park
Property Description	The Site is located on the west side of 63 rd Drive, approximately 50 feet south of the intersection of Saunders Street and 63 rd Drive in Rego Park (Queens), New York (Figure 1). The Site is identified on the New York City Tax Map as Block 3081, Lot 125. The Site consists of an approximate 0.057-acre lot and is currently developed with a one-story, 1,875 square foot building. Directly adjacent to the Site is a wine and liquor retail store, Chinese restaurant, income tax office, Kosher meats, barber shop, and realty office to the north; a jewelry exchange store to the south; a dental office and beauty supply store to the east (across 63 rd Drive); and a mixed-use commercial and residential building to the west.
Property Address	94-17 63 rd Drive, Rego Park, New York
Property Town, County, State	Rego Park, Queens, New York
Property Tax Identification	Block 3081, Lot 125
Property Topographic Quadrangle	USGS US TOPO 7.5-MINUTE MAP FOR JAMAICA, NY 2016
Nearest Intersection	63 rd Drive and Saunders Street
Area Description	The area surrounding the Site is used mainly for commercial purposes. Surrounding properties to the north, south, east, and west are all commercial properties with multi-family apartment buildings.
Current Site Zoning	Commercial (C4-2)

Property Information	
Property Acreage	0.057 acres (total)
Property Shape	Rectangular
Property Use	The property building is currently vacant
Number of Buildings	One with two commercial tenant spaces
Number of Stories	One-story building
Date of Construction	c. 1931
Basement/ Slab-on-Grade	Basement and Slab-on-grade
Number of Units	2
Ceiling Finishes	Gypsum ceiling
Floor Finishes	Vinyl floor tile and concrete

Property Information	
Wall Finishes	Gypsum wallboard
HVAC	Natural Gas
Renovation Date	None
Renovation Description	None
Vehicular Access	Via 63 rd Drive
Other Improvements	Sidewalks
Property Coverage	Footprint of the buildings, sidewalks, and the rear yard has a concrete pad and exposed soil with some vegetation.

2.1.1 Site Operations

The Site is currently vacant. The former Cleaners tenant space is vacant but was located at 94-17 63rd Drive. The adjacent property will also be addressed by this IRM and is operating a commercial business.

2.1.2 Topography/Hydrogeology

The land surface elevation at the Site is approximately 43 feet above mean sea level (ft amsl), according to maps published by the United States Geological Survey (USGS). The Site is underlain by glaciofluvial deposits, which is consistent with the surrounding area, and comprised of sands, silts, clay, gravels, cobbles, and boulders. A formal groundwater flow direction study has not been conducted at the Site. Groundwater flow direction is likely influenced by local conditions and bedrock topography. The direction of groundwater beneath the Site is assumed to be similar to the regional flow pattern, being north-northeast toward Meadow Lake.

2.2 Summary of Environmental Conditions

Based upon previous investigations conducted to date, the primary contaminants of concern for the Site include chlorinated volatile organic compounds (CVOCs) in soil, soil vapor, and indoor air.

EFI Global, Inc. (EFI) performed a Phase I Environmental Site Passement (ESA), dated February 20, 2019, and a Phase II Limited Subsurface Investigation (EFI Investigation) at the Site. The results of the EFI Investigation are described in the EFI Phase II Limited Subsurface Investigation Report (EFI Investigation Report), dated March 25, 2019. Data collected from the adjacent property, located at 94-13 and 94-15 63rd Drive, is included as an appendix in the EFI Phase I ESA.

A summary of the results is provided below.

2.2.1 Previous Environmental Sampling

The following is a brief summary of environmental sampling conducted at the Site. A complete description of previous environmental sampling conducted at the Site will be included in the RI/FS.

Soil

According to the EFI Investigation Report, the following maximum concentrations for each volatile organic compound (VOC) were detected in soil, but did not exceed the New York Department of Environmental Conservation (NYSDEC) Part 375 Unrestricted or Commercial Soil Cleanup Objectives (USCOs):

VOCs

- Tetrachloroethene (PCE) at SB-1 (16-18 ft bls) at a concentration of 173 micrograms per kilogram (µg/kg);
- Trichloroethene (TCE) at SB-2 (3-6 ft bls) at a concentration of 19.6 µg/kg;
- Cis-1,2-Dichloroethene at SB-2 (3-6 ft bls) at a concentration of 3.41 µg/kg;
- Benzene at SB-2 (3-6 ft bls) at a concentration of 4.72 µg/kg; and
- Toluene at SB-3 (3-6ft bls) at a concentration of 3.18 µg/kg.

Groundwater

One groundwater sample was collected as part of the EFI Investigation. PCE was detected in sample GW-1 at a concentration of 23.6 micrograms per liter (µg/L), which exceeds the NYSDEC Ambient Water Quality Guidance Value of 5 µg/L.

Sub-Slab Soil Vapor and Indoor Air

Two (2) sub-slab soil vapor samples and one (1) indoor air sample were collected during the EFI Investigation and the results are shown on Figure 7. Several CVOCs and petroleum-related VOCs were detected in sub-slab soil vapor and indoor air. The New York State Department of Health (NYSDOH) Final Guidance for Evaluating Soil Vapor Intrusion in the State of New York, dated October 2006 and revised in May 2017 (NYSDOH Guidance), employs three Matrices to determine whether monitoring or mitigation of soil vapor levels are warranted, based on concentrations present in sub-slab and indoor air samples. Matrix A applies to TCE, carbon tetrachloride, 1,1-dichloroethene and cis-1,2-dichloroethene, Matrix B applies to PCE, methylene chloride, and 1,1,1-trichloroethane, and Matrix C applies to vinyl chloride. The following table presents the concentrations of matrix CVOCs detected at the Site and the corresponding recommended actions based on the matrices:

Table 1. Sub-Slab Soil Vapor/Indoor Air CVOC Concentrations at Site

Table 1A. NYSDOH Decision Matrix A

Sample ID	SS-1	SS-2	IA-1 (Basement)	NYSDOH Decision Matrix
Sample Depth	6"	6"	N/A	Soil Vapor / Indoor Air
Sample Date	3/12/2019	3/12/2019	3/12/2019	Matrix A
Trichloroethene (TCE)	791	25.9	ND	Mitigate
Cis-1,2 Dichloroethene	423	2.79	ND	Mitigate
1,1-Dichloroethene	3.11	ND	ND	No further Action

Table 1B. NYSDOH Decision Matrix B

Sample ID	SS-1	SS-2	IA-1 (Basement)	NYSDOH Decision Matrix
Sample Depth	6"	6"	N/A	Soil Vapor / Indoor Air
Sample Date	3/12/2019	3/12/2019	3/12/2019	Matrix B
Tetrachloroethene (PCE)	3,240	4,030	19.9	Mitigate
Methylene Chloride	1.77	1.79	ND	No Further Action

Sample ID	SS-1	SS-2	IA-1 (Basement)	NYSDOH Decision Matrix
1,1,1-Trichloroethane	ND	ND	ND	No Further Action

Table 1C. NYSDOH Decision Matrix C

Sample ID	SS-1	SS-2	IA-1 (Basement)	NYSDOH Decision Matrix
Sample Depth	6"	6"	N/A	Soil Vapor / Indoor Air
Sample Date	3/12/2019	3/12/2019	3/12/2019	Matrix C
Vinyl Chloride	49	ND	ND	Monitor

PCE was the only matrix compound detected in indoor air (note the EFI Investigation Report indicated TCE was detected in indoor air, but a review of the laboratory data contained within the EFI Investigation Report indicated TCE was not detected) at the Site. Based on a comparison of PCE concentrations detected in sub-slab soil vapor and indoor air samples to the NYSDOH Soil Vapor/Indoor Air Matrices, PCE concentrations require mitigation.

Table 2. Sub-Slab Soil Vapor/Indoor Air CVOC Concentrations at Adjacent Property

Table 2A. NYSDOH Decision Matrix A

Sample ID	SV-1	IA-1 (Basement)	NYSDOH Decision Matrix
Sample Depth		N/A	Soil Vapor / Indoor Air
Sample Date	8/24/2018	8/24/2018	Matrix A
Trichloroethene (TCE)	1,130	0.322	Mitigate
Cis-1,2 Dichloroethene	1,050	ND	Mitigate
1,1-Dichloroethene	ND	ND	No further Action

Table 2B. NYSDOH Decision Matrix B

Sample ID	SS-1	IA-1 (Basement)	NYSDOH Decision Matrix
Sample Depth		N/A	Soil Vapor / Indoor Air
Sample Date	8/24/2018	8/24/2018	Matrix B
Tetrachloroethene (PCE)	33,000	12.2	Mitigate
Methylene Chloride	ND	3.16	No Further Action
1,1,1-Trichloroethane	ND	0.24	No Further Action

Table 2C. NYSDOH Decision Matrix C

Sample ID	SS-1	IA-1 (Basement)	NYSDOH Decision Matrix
Sample Depth		N/A	Soil Vapor / Indoor Air
Sample Date	8/24/2018	8/24/2018	Matrix C
Vinyl Chloride	ND	ND	Monitor

PCE and TCE were detected in indoor air at the adjacent property. Based on a comparison of PCE, TCE, and cis-1,2-Dichloroethene concentrations detected in sub-slab soil vapor and indoor air samples to the NYSDOH Soil Vapor/Indoor Air Matrices, PCE, TCE, and cis-1,2-Dichloroethene concentrations require mitigation (see table above).

3. Scope of Work

The scope of work for the IRM consists of the following tasks:

- Site mobilization and Site preparation;
- Installation of the SSDS components;
- Waste disposal (assumed to be minimal); and
- Documentation.

Implementation of the IRM will be in accordance with the Soils/Materials Management Plan (SoMP) included in Section 4 of this IRM Work Plan.

3.1 Mobilization and Site Preparation

A project kick-off meeting will be conducted with the NYSDEC, Arbern, Roux and the selected Contractor prior to the commencement of any intrusive activities, if requested by the NYSDEC. The Contractor will supply any labor (HAZWOPER-Certified in accordance with OSHA 1910.120) and materials required for the implementation of the IRM scope of work. In addition, necessary permits, insurance, bonds, and licenses required to complete the work will be obtained and fees necessary to obtain these permits will be paid. Mobilization and Site preparation activities include:

1. Mobilization of equipment to the work area;
2. Installation of work area delineation zones;
3. Installation of sub-slab suction points;
4. Installation of header piping and roof leaders;
5. Installation of blower on roof; and
6. Demobilization of equipment.

3.2 SSDS Installation

Sub-slab soil vapor samples collected during a the EFI Investigation detected elevated concentrations of PCE, TCE, and Cis-1,2 Dichloroethene on-Site; therefore, an active SSDS is proposed to be installed beneath the portions of the Site building shown on Drawing 1 to address potential exposure pathways. The proposed active SSDS will include vertical polyvinyl chloride (PVC) suction points at five locations. The testing of the SSDS will be completed following installation.

An observation was made in the EFI Phase I ESA that the adjacent target property, 94-15 63rd Drive, may have some type of SSDS already installed. The proposed IRM design will incorporate this existing SSDS system depending on existing conditions to the extent practicable once an access agreement has been procured. However, the current plan, as summarized below, provides for a full-scale design in the event the existing system/piping is not sufficiently designed or constructed. Field adjustments will be made as needed to incorporate the existing components and documented in the subsequent reporting.

The active SSDS for the Site, when complete, will consist of a network of vertical suction points creating a vacuum influence beneath the portion of the building's basement slab shown on Drawing 1, and one vacuum blower located on the roof of the building. The SSDS plan design and piping details are provided in Drawing 1. A description of the proposed active SSDS is provided below.

- All existing interior utility and slab penetrations will be sealed with silicone caulking, to the extent feasible.
- Five (5) vertical suction points will be installed to create the required vacuum influence below the basement slab of portions of the Site building. All suction points will consist of 4-inch PVC piping below the slab and steel above the slab (Drawing 1).
- Each suction point will have a shut off valve and vacuum gauge.
- The piping from the suction points will be brought to the roof along the interior of the building. The header will be connected to a vacuum blower on the roof of the building. An adequately-sized explosion proof vacuum blower with knockout tank will be provided for the suction points. Drawing 1 shows suction points and piping associated with the SSDS. Blower and piping headers will be located on the roof, as not to interfere with the existing Site use.
- Any interior piping will be routed around existing heating, ventilation, and air conditioning (HVAC) ducts and utility pipes and supported, as needed. Exterior piping will be supported appropriately.
- Extracted vapor evaluation:
 - A Division of Air Resources (DAR 1) screening analysis was performed for selected compounds identified in the sub-slab soil vapor samples to determine if the estimated emissions from the operation of the active SSDS would exceed the permissible limits. Appendix B presents the DAR 1 screening level worksheet for the evaluation of PCE, TCE, and 1,2-Dichloroethane (DCE), which were identified as the constituents of concern for the evaluation based on the relatively high concentrations observed in the sub-slab soil vapor samples and the low guidance concentrations (i.e., allowable discharge limits). The DAR 1 evaluation was employed using the contaminant emission rate (pounds per hour) based on the vapor samples collected in March 2019. The emission impacts were compared to the annual guidance concentration (AGC) values and the short-term guidance concentration (SGC) values from the July 14, 2016 DAR 1 AGC/SGC Tables. Based on the DAR 1 analysis, the estimated contaminant emission rates are below the AGC and SGC values for PCE, TCE, and DCE; therefore, vapor treatment is not required prior to discharge. This will be confirmed during SSDS start-up testing, as described in Section 3.3.
- The vacuum blower will be installed on the roof on timber supports. The discharge stack will extend above the roof line, and will be supported as necessary. The discharge point will be located a minimum of 10 feet from any HVAC air inlets and the building edge.
- The vacuum blower will be installed with an alarm system that includes a low vacuum switch to alert the building manager of any issues. The alarm should be placed in a location that will be noticed by the building manager.
- Two sub-slab soil vapor monitoring points will be used to monitor the performance of the SSDS. Two new monitoring points (SV-1 through SV-2) will be installed approximately where shown on Drawing 1.

3.3 SSDS Startup and Testing

Performance monitoring will be performed on the SSDS as part of the SSDS start-up to verify the system is operating properly and will consist of the following for each system:

- Confirm operation of the local alarm warning light and remote alarm;
- Confirm acceptable air flow rate from the SSDS blower by a visual inspection of gauges affixed to each blower;
- Confirm acceptable negative pressure readings from the SSDS and suction points by a visual inspection of gauges to each blower and suction point or lateral;
- Confirm acceptable negative differential pressure (a minimum of -0.004 inches of water column) beneath the building from monitoring points by using an appropriate micromanometer;

- Collect photoionization detector (PID) readings; and
- Collect confirmation effluent air samples.

Negative differential pressure measurements will be collected from the soil vapor monitoring points shown on SSDS Drawing 1. The negative pressure measurements will be collected using a micromanometer capable of monitoring differential pressure at a minimum of 0.001 inches of water column. If adequate depressurization (e.g., negative differential pressure of at least -0.004 inches of water column) is not occurring, the cause for the lack of depressurization will be investigated and repaired, and measurements will be collected again.

Following the initial start-up, performance monitoring of the SSDS will also include monitoring the system effluent VOC concentrations using a PID. In addition, during start-up of the SSDS, an effluent air sample will be collected from the discharge of each blower using a Summa canister and analyzed using USEPA TO-15 to verify that vapor treatment is not needed. The effluent air sample results will be compared to the DAR-1 Air Guide guidance values. If the sample results indicate that treatment is required, appropriate treatment options will be evaluated and installed.

The system testing described above (excluding effluent air sampling) will be conducted if, in the course of the SSDS lifetime, significant changes are made to the SSDS, or if the system is shut down for an extended period for any reason, and the system must be restarted.

3.4 SSDS Operation, Maintenance and Monitoring (O, M &M)

O, M & M procedures for the SSDS will be included in the Site Management Plan (SMP) for the Site, but are outlined herein for the period prior to the SMP being in place.

3.4.1 System Operation: Routine Operation Procedures

Routine operation procedures will consist of monitoring the vacuum at the blower inlet and recording dilution valve setting (e.g., 50% open).

3.4.2 System Operation: Routine Equipment Maintenance

The routine maintenance activities include visual inspections, operating data collection and general maintenance. Visual inspection is the routine part of the SSDS operator's activities. The system operator will note any conditions that present a potential hazard or could cause future system shutdown. In the field, special attention will be paid to the condition of the blower and appurtenances, and the above slab discharge piping and supports. Special attention will also be given to any unusual or excessive noise or vibrations from the piping and blower. The piping and valves will be inspected for leaks.

All equipment maintenance and inspections will be performed in accordance with manufacturer's instructions. Specific routine maintenance tasks are outlined below:

- Inspect control panel and warning lights/alarms and remote alarm;
- Inspect blower piping to confirm operation of appropriate valves (i.e., dilution valve);
- Inspect vacuum/pressure gauges for proper operation;
- Check and clean air filter on moisture knockout tank; and
- Check for the presence of and remove water in knockout tank.

In the event that a condition warranting system component maintenance is identified, the appropriate reporting and maintenance should be conducted immediately. Any maintenance completed for the SSDS should be documented in the Maintenance Log included in Appendix C.

3.4.3 System Operation: Non-Routine Equipment Maintenance

Non-routine equipment maintenance consists of maintenance activities that will be performed with less frequency than the routine maintenance (i.e., semi-annually) on several system components. Specific non-routine maintenance tasks are outlined below:

- Inspect and test local and remote alarms;
- Check float switch in each knockout tank for proper operation;
- Replacement of vacuum/pressure gauges; and
- Change bearings on blowers after 15,000 hours of operation.

Most damage or problems associated with SSDS components will trigger one of the alarms. Damage to any SSDS components will be noted during the routine and detailed system inspections and remedied upon identification.

Accumulated condensate will be containerized in a 55-gallon drum for future off-Site disposal, if necessary based upon sample results from the first batch of drummed condensate and pending NYSDEC Contained-In Determination approval. Manufacturer's recommendations for SSDS component maintenance should be followed. Any maintenance completed for the SSDS should be documented in the SSDS Log included in Appendix C.

In the event that low SSDS air flow rates or vacuum are observed anywhere in the SSDS, further SSDS balancing may be necessary following moisture removal, to ensure that the combined air flow rates and vacuum in a given area of the Site achieve the minimum design requirements.

3.5 Waste Disposal

All wastes generated during the installation of the SSDS will be handled, transported and disposed of in a manner consistent with Federal, State and local laws and regulations. A limited amount of soil is anticipated to be generated during SSDS installation since the majority of the SSDS piping will be installed above the basement concrete slab/floor. However, based on the results of previous soil samples collected at the Site, soil containing elevated concentration of CVOCs is not anticipated to be encountered during SSDS installation and is expected to be declassified as non-hazardous waste under the NYSDEC Contained-In Determination Policy and disposed of as non-hazardous waste, pending NYSDEC approval.

3.6 Documentation

Detailed information regarding the IRM (e.g., as-built drawings, waste disposal documentation, backfill documentation, photographs, etc.) will be included in the Construction Completion Report (CCR) described in Section 5.

4. Soil/Materials Management Plan

Although the amount of earthwork is expected to be very limited, the following sections provide the SoMP to be implemented during the IRM, as necessary.

4.1 Soil Screening Methods

Visual, olfactory, and PID soil screening and assessment will be performed during SSDS installation activities under the supervision of Roux personnel.

4.2 Containerization of Waste

All soil generated during SSDS installation will be containerized in labeled, New York State Department of Transportation (NYSDOT) rated 55-gallon drums or roll-off containers, which will be fitted with tight-fitting covers. If waste is determined to be hazardous, it will be disposed of within 90 days of generation at an approved hazardous waste disposal facility.

4.3 Characterization of Excavated Materials

Soil/fill or other excavated media that will be transported off-Site for disposal will be sampled in a manner required by the receiving facility, and in compliance with applicable laws and regulations.

4.4 Materials Excavation and Load Out

Roux will oversee all intrusive work and the excavation and load-out of all excavated material. The quantity of waste is expected to be very limited and it will be containerized in drums for disposal. Loadout and trucking of bulk waste is not expected.

Arbern and its contractors are solely responsible for safe execution of all intrusive and other work performed under this SoMP. Support of excavation, though unlikely due to the nature of the work, will be provided, if necessary, based upon Site conditions and local regulations.

4.5 Contingency Plan

This contingency plan is developed for the remedial construction to address the discovery of unknown structures or contaminated media during implementation of the IRM. Due to the nature of the proposed work, discovery of previously unknown USTs is extremely unlikely.

If previously unidentified contaminant sources are found during implementation of the IRM, sampling will be performed on potentially contaminated source material and surrounding soils and reported to NYSDEC. Chemical analytical work will be for full suite of parameters (target compound list [TCL] VOCs, TCL semivolatile organic compounds [SVOCs], target analyte list [TAL] metals, TCL polychlorinated biphenyls [PCBs], pesticides, and herbicides).

Identification of unknown or unexpected contaminated media identified by screening during intrusive Site work will be promptly communicated by phone to NYSDEC's Project Manager. These findings will also be included in weekly and periodic electronic reports.

4.6 Community Air Monitoring Plan (CAMP)

A CAMP will be implemented, in accordance with the Generic CAMP procedures included in Appendix G of the Health and Safety Plan (HASP; Appendix D), during all intrusive activities to minimize the potential for tenant exposure from potentially contaminated soil and soil vapor. Roux will provide ambient air quality monitoring for VOCs and particulates during all intrusive Site activities. CAMP monitoring data will be included in daily reports (see Section 5.1). Action level exceedances will be reported to Arbern project manager and appropriate communication and action taken. If an action limit is report is generated due to VOC exceedances, the NYSDEC and NYSDOH will be notified within 24 hours of the exceedance. Health and safety monitoring for workers will be performed in accordance with the HASP.

4.7 Odor, Dust, and Nuisance Control Plan

The CCR will include the following certification by the certifying professional engineer: “I certify that all intrusive work during the remediation and all intrusive development work were conducted in accordance with dust and odor suppression methodology defined in the IRM Work Plan.”

4.7.1 Odor Control Plan

In addition to the health and safety monitoring described in the HASP (Appendix D), Roux will closely monitor the presence of odors emanating from the work area within the building. This odor control plan is capable of controlling emissions of nuisance odors on-Site. Due to the nature of the project, with all intrusive work occurring in the basement of the existing building, nuisance odor will not be generated at the sidewalk level surrounding the Site. The HASP will contain specific measures to address potential worker exposure to airborne contaminants during the IRM implementation. Specific odor control methods to be used on a routine basis will include limiting open excavation areas, keeping excavations covered, and covering excavated soil (i.e., in covered drums). If nuisance odors are identified, work will be halted, and the source of odors will be identified and corrected. Work will not resume until all nuisance odors have been abated. NYSDEC and NYSDOH will be notified of all odor events and of all other complaints about the project. Implementation of all odor controls, including the halt of work, will be the responsibility of Roux, who is responsible for certifying the CCR and its subcontractors.

Odor controls will be employed to prevent on- and off-Site odor nuisances. At a minimum, procedures will include: (a) limiting the area of open excavations; (b) shrouding open excavations with tarps and other covers; and (c) use of odor suppressants to cover exposed odorous soils.

4.7.2 Dust Control Plan

Due to the nature of the project, with excavation occurring in the basement of the existing building, generation of nuisance dust at the sidewalk level surrounding the Site will not occur. The HASP will contain specific measures to address potential worker exposure to airborne particulates during the IRM implementation. A dust suppression plan that addresses dust management during intrusive on-Site work will include, at a minimum, the items listed below:

- Dust suppression will be achieved through the use of water for wetting excavation areas. Water will be available on-Site at suitable a supply and pressure for use in dust control.

4.7.3 Other Nuisances

Noise control will be exercised during the remedial program.

5. Reporting

5.1 Daily Reporting During Site Activities

Daily reports to NYSDEC and NYSDOH will be submitted during the days when IRM activities take place. Daily reports will include an update of progress made during the reporting period; locations of work and quantities of material imported and exported from the Site; a summary of any and all complaints with relevant details (names, phone numbers); a summary of CAMP readings; and an explanation of notable Site conditions, etc. If any issues arise (i.e., issues with the CAMP), NYSDOH and NYSDEC will be notified within 24 hours.

5.2 Construction Completion Report (CCR)

Detailed information regarding the IRM (e.g., general description of the construction activities, as-built of the SSDS, waste disposal documentation, backfill documentation, photographs, etc.) will be included in the CCR. The CCR will be submitted within 60 days after the data usability summary report (DUSR) is complete for any vapor samples collected during the SSDS start-up.

6. IRM Implementation Schedule

This IRM Work Plan is anticipated to begin in the third quarter of 2019, pending access to the adjacent property, and will require approximately four to six weeks to complete. Currently, we do not have access to the neighboring site and the schedule and implementation of the IRM is contingent on Roux gaining access. It is anticipated the actual on-Site duration of major remedial construction tasks will be completed as follows (time frames are not necessarily consecutive):

- Site Mobilization and Preparation one day
- SSDS Installation three to four weeks
- SSDS Startup and Testing two days
- Transportation and Off-Site Disposal one day
- Site Restoration and Demobilization one day
- Submittal of CCR After Startup and Testing Completed 60 days

Interim Remedial Measure Work Plan
94-17 63rd Drive, Rego Park, New York


TABLES

1. Summary of Volatile Organic Compounds in Air and Soil Vapor at Site (Embedded)
2. Sub-Slab Soil Vapor/indoor Air CVOV Concentrations at Adjacent property (Embedded)


Interim Remedial Measure Work Plan
94-17 63rd Drive, Rego Park, New York

FIGURES

1. Site Location Map
2. Site Plan
3. Summary of NYSDOH Decision Matrix CVOCs
in Soil Vapor and Indoor Air

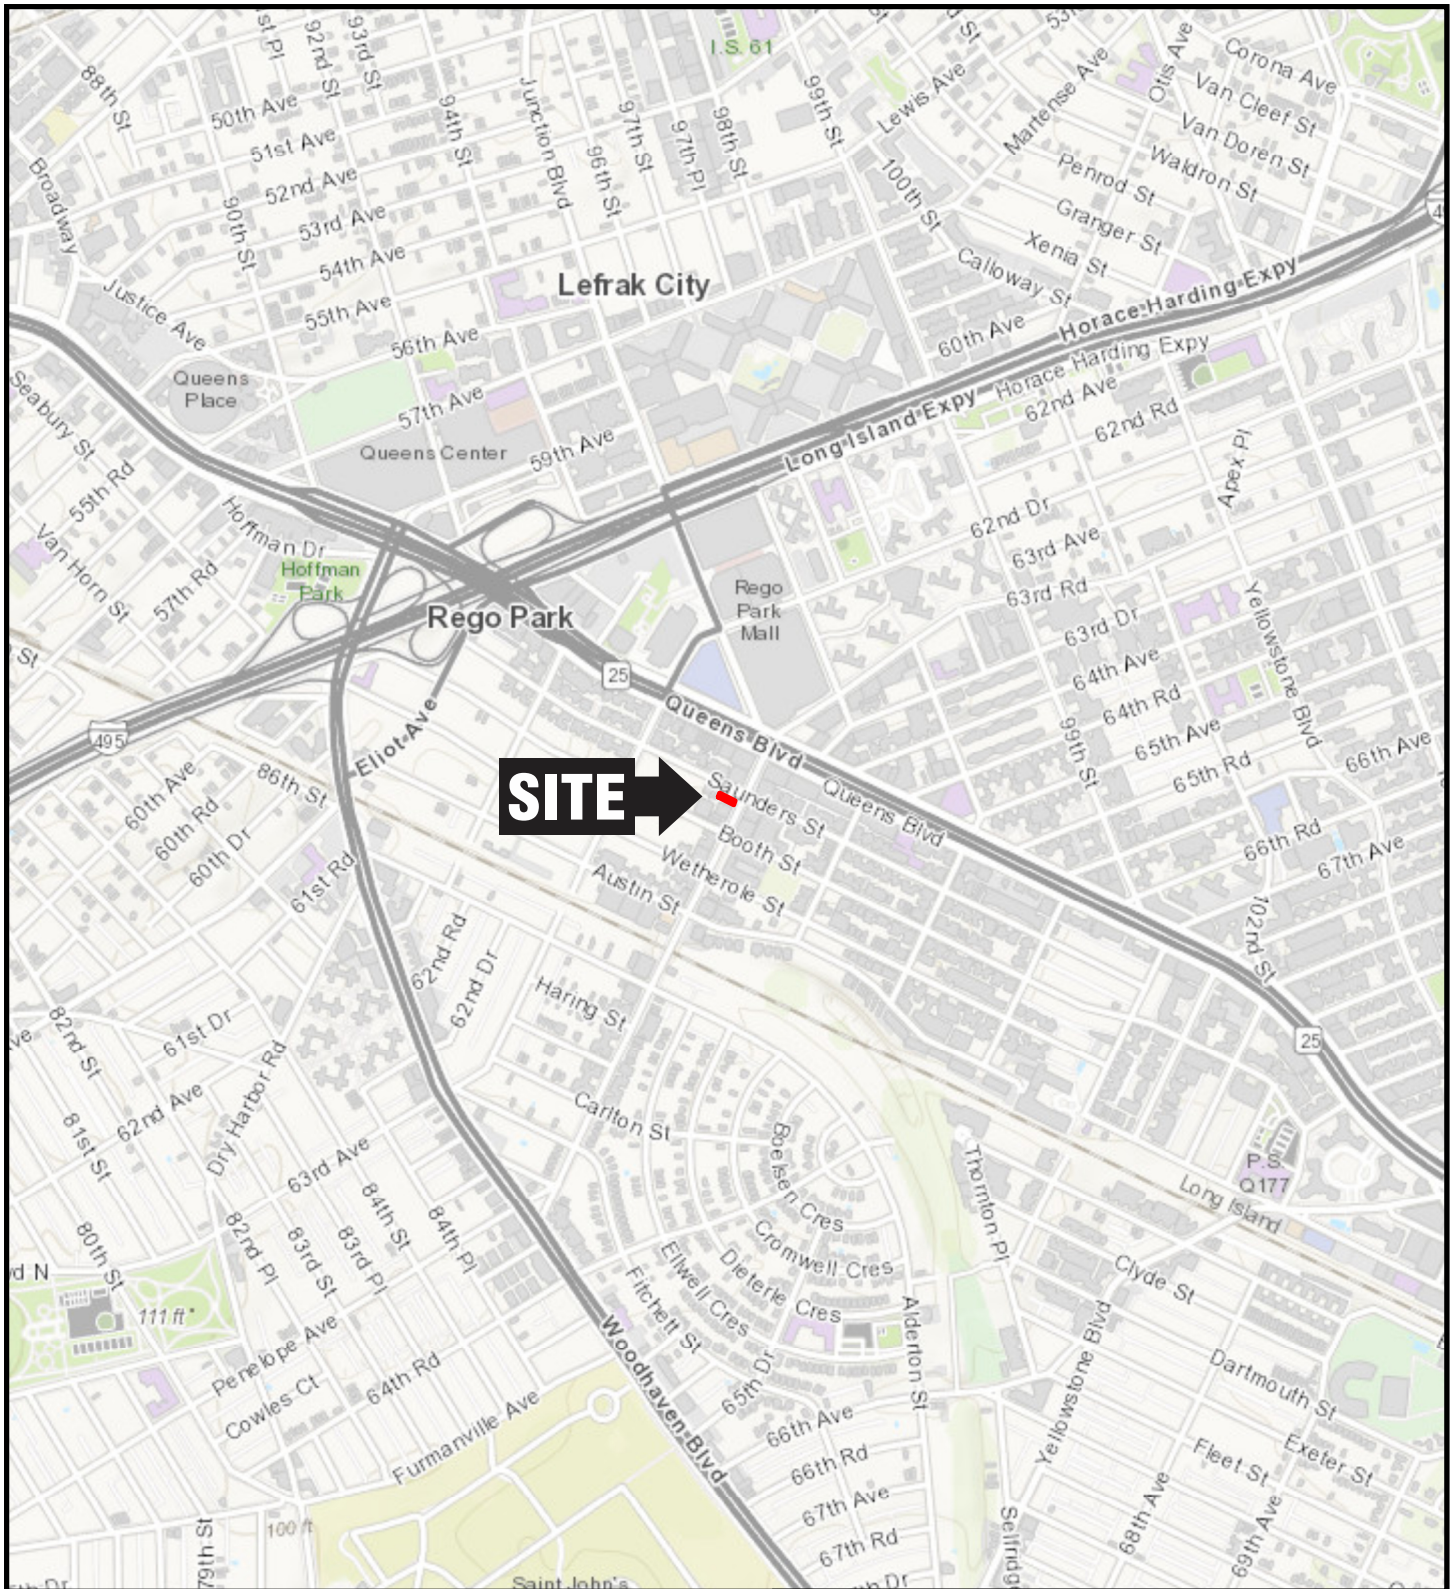

QUADRANGLE LOCATION



Title:

SITE LOCATION MAP

94-17 63RD DRIVE
REGO PARK, NEW YORK

Prepared for:

ARBERN QUEENS COMMERCIAL PROPERTIES LLC



Compiled by: R.L.

Date: 06/26/19

FIGURE

Prepared by: M.S.R.

Scale: AS SHOWN

Project Mgr: R.L.

Project: 3316.0001Y000

File: 3316.0001Y101.1.mxd

1



LEGEND

LOCATION OF SUB-SLAB VAPOR SAMPLING POINT

LOCATION OF INDOOR AIR SAMPLING POINT

LOCATION OF SOIL BORING

LOCATION OF SOIL BORING AND TEMPORARY MONITORING WELL

PROPOSED BCP SITE BOUNDARY

NOTES

1. ALL LOCATIONS ARE APPROXIMATE

2. SAMPLING COMPLETED BY EFI GLOBAL, INC. IN 2019

15015'

Title:

SITE PLAN

94-17 63RD DRIVE
REGO PARK, NEW YORK

Prepared for:

ARBERN QUEENS COMMERCIAL PROPERTIES LLC

Compiled by: R.M.

Prepared by: M.S.R.

Project Mgr: R.L.

File: 3316.0001Y101.2.mxd

Date: 06/26/19

Scale: AS SHOWN

Project: 3316.0001Y000


FIGURE


2


V:\GIS\PROJECTS\3316\0001Y100\3316.0001Y100.7.MXD



LEGEND

 LOCATION OF SUB-SLAB VAPOR SAMPLING POINT

 LOCATION OF INDOOR AIR SAMPLING POINT

 PROPOSED BCP SITE BOUNDARY

NOTES

1. ALL LOCATIONS ARE APPROXIMATE

2. SAMPLING COMPLETED BY EFI GLOBAL, INC. IN 2019

3. ALL CONCENTRATIONS SHOWN IN MICROGRAMS PER CUBIC METER ($\mu\text{G}/\text{M}^3$)


4. BOLD DATA INDICATES ANALYTE WAS DETECTED

5. ALL SAMPLES COLLECTED IN BUILDING BASEMENT

CVOCS - CHLORINATED VOLATILE ORGANIC COMPOUNDS

NYSDOH - NEW YORK STATE DEPARTMENT OF HEALTH

ND - NO DETECTION



SS-1	3/12/19	NYSDOH Soil Vapor/Indoor Air Decision Matrix
CVOCS		
1,1-Dichloroethene	3.11	No Further Action (Matrix A)
1,1,1-Trichloroethane	ND	No Further Action (Matrix B)
Cis-1,2-Dichloroethene	423	Mitigate (Matrix A)
Methylene Chloride	1.77	No Further Action (Matrix B)
Tetrachloroethene (PCE)	3,240	Mitigate (Matrix B)
Trichloroethene (TCE)	791	Mitigate (Matrix A)
Vinyl Chloride	49	Monitor (Matrix C)


IA-1	3/12/19	NYSDOH Soil Vapor/Indoor Air Decision Matrix
CVOCS		
1,1-Dichloroethene	ND	No Further Action (Matrix A)
1,1,1-Trichloroethane	ND	No Further Action (Matrix B)
Cis-1,2-Dichloroethene	ND	Mitigate (Matrix A)
Methylene Chloride	ND	No Further Action (Matrix B)
Tetrachloroethene (PCE)	20	Mitigate (Matrix B)
Trichloroethene (TCE)	ND	Mitigate (Matrix A)
Vinyl Chloride	ND	Monitor (Matrix C)

SS-2	3/12/19	NYSDOH Soil Vapor/Indoor Air Decision Matrix
CVOCS		
1,1-Dichloroethene	ND	No Further Action (Matrix A)
1,1,1-Trichloroethane	ND	No Further Action (Matrix B)
Cis-1,2-Dichloroethene	2.79	Mitigate (Matrix A)
Methylene Chloride	1.79	No Further Action (Matrix B)
Tetrachloroethene (PCE)	4,030	Mitigate (Matrix B)
Trichloroethene (TCE)	25.9	Mitigate (Matrix A)
Vinyl Chloride	ND	Monitor (Matrix C)

Title: **SUMMARY OF NYSDOH DECISION MATRIX CVOCS IN SOIL VAPOR AND INDOOR AIR**

94-17 63RD DRIVE
REGO PARK, NEW YORK

Prepared for:
ARBERN QUEENS COMMERCIAL PROPERTIES LLC

	Compiled by: R.L.	Date: 06/26/19	FIGURE 3
	Prepared by: M.S.R.	Scale: AS SHOWN	
	Project Mgr: R.L.	Project: 3316.0001Y000	
	File: 3316.0001Y100.7.mxd		

APPENDICES

- A. New York State Department of Health Soil Vapor/Indoor Air Matrices
- B. Division of Air Resources (DAR 1) Screening Analysis
- C. Sub-Slab Depressurization System Operations and Maintenance Log
- D. Health and Safety Plan

Interim Remedial Measure Work Plan
94-17 63rd Drive, Rego Park, New York

APPENDIX A

New York State Department of Health Soil
Vapor/Indoor Air Matrices

Soil Vapor/Indoor Air Matrix A

May 2017

Analytes Assigned:

Trichloroethene (TCE), *cis*-1,2-Dichloroethene (c12-DCE), 1,1-Dichloroethene (11-DCE), Carbon Tetrachloride

SUB-SLAB VAPOR CONCENTRATION of COMPOUND (mcg/m ³)	INDOOR AIR CONCENTRATION of COMPOUND (mcg/m ³)		
	< 0.2	0.2 to < 1	1 and above
< 6	1. No further action	2. No Further Action	3. IDENTIFY SOURCE(S) and RESAMPLE or MITIGATE
6 to < 60	4. No further action	5. MONITOR	6. MITIGATE
60 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE

No further action: No additional actions are recommended to address human exposures.

Identify Source(s) and Resample or Mitigate: We recommend that reasonable and practical actions be taken to identify the source(s) affecting the indoor air quality and that actions be implemented to reduce indoor air concentrations to within background ranges. For example, if an indoor or outdoor air source is identified, we recommend the appropriate party implement actions to reduce the levels. In the event that indoor or outdoor sources are not readily identified or confirmed, resampling (which might include additional sub-slab vapor and indoor air sampling locations) is recommended to demonstrate that SVI mitigation actions are not needed. Based on the information available, mitigation might also be recommended when soil vapor intrusion cannot be ruled out.

Monitor: We recommend monitoring (sampling on a recurring basis), including but not necessarily limited to sub-slab vapor, basement air and outdoor air sampling, to determine whether concentrations in the indoor air or sub-slab vapor have changed and/or to evaluate temporal influences. Monitoring might also be recommended to determine whether existing building conditions (e.g., positive pressure heating, ventilation and air-conditioning systems) are maintaining the desired mitigation endpoint and to determine whether changes are needed. The type and frequency of monitoring is determined based on site-, building- and analyte-specific information, taking into account applicable environmental data and building operating conditions. Monitoring is an interim measure required to evaluate exposures related to soil vapor intrusion until contaminated environmental media are remediated.

Mitigate: We recommend mitigation to minimize current or potential exposures associated with soil vapor intrusion. The most common mitigation methods are sealing preferential pathways in conjunction with installing a sub-slab depressurization system and changing the pressurization of the building in conjunction with monitoring. The type, or combination of types, of mitigation is determined on a building-specific basis, taking into account building construction and operating conditions. Mitigation is considered a temporary measure implemented to address exposures related to soil vapor intrusion until contaminated environmental media are remediated.

These general recommendations are made with consideration being given to the additional notes on page 2.

ADDITIONAL NOTES FOR MATRIX A

This matrix summarizes actions recommended to address current and potential exposures related to soil vapor intrusion. To use the matrix appropriately as a tool in the decision-making process, the following should be noted:

- [1] The matrix is generic. As such, it may be appropriate to modify a recommended action to accommodate analyte-specific, building-specific conditions (e.g., dirt floor in basement, crawl spaces, thick slabs, current occupancy, etc.), and/or factors provided in Section 3.2 of the guidance (e.g., current land use, environmental conditions, etc.). For example, collection of additional samples may be recommended when the matrix indicates "no further action" for a particular building, but the results of adjacent buildings (especially sub-slab vapor results) indicate a need to take actions to address exposures related to soil vapor intrusion. Mitigation might be recommended when the results of multiple contaminants indicate monitoring is recommended. Proactive actions may be proposed at any time. For example, the party implementing the actions may decide to install sub-slab depressurization systems on buildings where the matrix indicates "no further action" or "monitoring." Such an action might be undertaken for reasons other than public health (e.g., seeking community acceptance, reducing costs, etc.). However, actions implemented *in lieu* of sampling will typically be expected to be captured in the final engineering report and site management plan, and might not rule out the need for post-implementation sampling (e.g., to document effectiveness or to support terminating the action).
- [2] Actions provided in the matrix are specific to addressing human exposures. Implementation of these actions does not preclude investigating possible sources of soil vapor contamination, nor does it preclude remediating contaminated soil vapor or the source of soil vapor contamination.
- [3] Appropriate care should be taken during all aspects of sample collection to ensure that high quality data are obtained. Since the data are being used in the decision-making process, the laboratory analyzing the environmental samples must have current Environmental Laboratory Approval Program (ELAP) certification for the appropriate analyte and environmental matrix combinations. Furthermore, samples should be analyzed by methods that can achieve a minimum reporting limit of 0.20 microgram per cubic meter for indoor and outdoor air samples. For sub-slab vapor samples and dirt floor soil vapor samples, a minimum reporting limit of 1 microgram per cubic meter is recommended.
- [4] Sub-slab vapor and indoor air samples are typically collected when the likelihood of soil vapor intrusion is considered to be the greatest (i.e., worst-case conditions). If samples are collected at other times (typically, samples collected outside of the heating season), then resampling during worst-case conditions might be appropriate to verify that actions taken to address exposures related to soil vapor intrusion are protective of human health.
- [5] When current exposures are attributed to sources other than soil vapor intrusion, the agencies should be given documentation (e.g., applicable environmental data, completed indoor air sampling questionnaire, digital photographs, etc.) to support a proposed action other than that provided in the matrix box and to support agency assessment and follow-up.
- [6] The party responsible for implementing the recommended actions will differ depending upon several factors, including but not limited to the following: the identified source of the volatile chemicals, the environmental remediation program, and analyte-specific, site-specific and building-specific factors.

Soil Vapor/Indoor Air Matrix B

May 2017

Analytes Assigned:

Tetrachloroethene (PCE), 1,1,1-Trichloroethane (111-TCA), Methylene Chloride

SUB-SLAB VAPOR CONCENTRATION of COMPOUND (mcg/m ³)	INDOOR AIR CONCENTRATION of COMPOUND (mcg/m ³)		
	< 3	3 to < 10	10 and above
< 100	1. No further action	2. No Further Action	3. IDENTIFY SOURCE(S) and RESAMPLE or MITIGATE
100 to < 1,000	4. No further action	5. MONITOR	6. MITIGATE
1,000 and above	7. MITIGATE	8. MITIGATE	9. MITIGATE

No further action: No additional actions are recommended to address human exposures.

Identify Source(s) and Resample or Mitigate: We recommend that reasonable and practical actions be taken to identify the source(s) affecting the indoor air quality and that actions be implemented to reduce indoor air concentrations to within background ranges. For example, if an indoor or outdoor air source is identified, we recommend the appropriate party implement actions to reduce the levels. In the event that indoor or outdoor sources are not readily identified or confirmed, resampling (which might include additional sub-slab vapor and indoor air sampling locations) is recommended to demonstrate that SVI mitigation actions are not needed. Based on the information available, mitigation might also be recommended when soil vapor intrusion cannot be ruled out.

Monitor: We recommend monitoring (sampling on a recurring basis), including but not necessarily limited to sub-slab vapor, basement air and outdoor air sampling, to determine whether concentrations in the indoor air or sub-slab vapor have changed and/or to evaluate temporal influences. Monitoring might also be recommended to determine whether existing building conditions (e.g., positive pressure heating, ventilation and air-conditioning systems) are maintaining the desired mitigation endpoint and to determine whether changes are needed. The type and frequency of monitoring is determined based on site-, building- and analyte-specific information, taking into account applicable environmental data and building operating conditions. Monitoring is an interim measure required to evaluate exposures related to soil vapor intrusion until contaminated environmental media are remediated.

Mitigate: We recommend mitigation to minimize current or potential exposures associated with soil vapor intrusion. The most common mitigation methods are sealing preferential pathways in conjunction with installing a sub-slab depressurization system and changing the pressurization of the building in conjunction with monitoring. The type, or combination of types, of mitigation is determined on a building-specific basis, taking into account building construction and operating conditions. Mitigation is considered a temporary measure implemented to address exposures related to soil vapor intrusion until contaminated environmental media are remediated.

These general recommendations are made with consideration being given to the additional notes on page 2.

ADDITIONAL NOTES FOR MATRIX B

This matrix summarizes actions recommended to address current and potential exposures related to soil vapor intrusion. To use the matrix appropriately as a tool in the decision-making process, the following should be noted:

- [1] The matrix is generic. As such, it may be appropriate to modify a recommended action to accommodate analyte-specific, building-specific conditions (e.g., dirt floor in basement, crawl spaces, thick slabs, current occupancy, etc.), and/or factors provided in Section 3.2 of the guidance (e.g., current land use, environmental conditions, etc.). For example, collection of additional samples may be recommended when the matrix indicates "no further action" for a particular building, but the results of adjacent buildings (especially sub-slab vapor results) indicate a need to take actions to address exposures related to soil vapor intrusion. Mitigation might be recommended when the results of multiple contaminants indicate monitoring is recommended. Proactive actions may be proposed at any time. For example, the party implementing the actions may decide to install sub-slab depressurization systems on buildings where the matrix indicates "no further action" or "monitoring." Such an action might be undertaken for reasons other than public health (e.g., seeking community acceptance, reducing costs, etc.). However, actions implemented *in lieu* of sampling will typically be expected to be captured in the final engineering report and site management plan, and might not rule out the need for post-implementation sampling (e.g., to document effectiveness or to support terminating the action).
- [2] Actions provided in the matrix are specific to addressing human exposures. Implementation of these actions does not preclude investigating possible sources of soil vapor contamination, nor does it preclude remediating contaminated soil vapor or the source of soil vapor contamination.
- [3] Appropriate care should be taken during all aspects of sample collection to ensure that high quality data are obtained. Since the data are being used in the decision-making process, the laboratory analyzing the environmental samples must have current Environmental Laboratory Approval Program (ELAP) certification for the appropriate analyte and environmental matrix combinations. Furthermore, samples should be analyzed by methods that can achieve a minimum reporting limit of 1 microgram per cubic meter for indoor and outdoor air samples. For sub-slab vapor samples and dirt floor soil vapor samples, a minimum reporting limit of 1 microgram per cubic meter is recommended.
- [4] Sub-slab vapor and indoor air samples are typically collected when the likelihood of soil vapor intrusion is considered to be the greatest (i.e., worst-case conditions). If samples are collected at other times (typically, samples collected outside of the heating season), then resampling during worst-case conditions might be appropriate to verify that actions taken to address exposures related to soil vapor intrusion are protective of human health.
- [5] When current exposures are attributed to sources other than soil vapor intrusion, the agencies should be given documentation (e.g., applicable environmental data, completed indoor air sampling questionnaire, digital photographs, etc.) to support a proposed action other than that provided in the matrix box and to support agency assessment and follow-up.
- [6] The party responsible for implementing the recommended actions will differ depending upon several factors, including but not limited to the following: the identified source of the volatile chemicals, the environmental remediation program, and analyte-specific, site-specific and building-specific factors.

Soil Vapor/Indoor Air Matrix C

May 2017

Analytes Assigned:

Vinyl Chloride

SUB-SLAB VAPOR CONCENTRATION of COMPOUND (mcg/m ³)	INDOOR AIR CONCENTRATION of COMPOUND (mcg/m ³)	
	< 0.2	0.2 and above
< 6	1. No further action	2. IDENTIFY SOURCE(S) and RESAMPLE or MITIGATE
6 to < 60	3. MONITOR	4. MITIGATE
60 and above	5. MITIGATE	6. MITIGATE

No further action: No additional actions are recommended to address human exposures.

Identify Source(s) and Resample or Mitigate: We recommend that reasonable and practical actions be taken to identify the source(s) affecting the indoor air quality and that actions be implemented to reduce indoor air concentrations to within background ranges. For example, if an indoor or outdoor air source is identified, we recommend the appropriate party implement actions to reduce the levels. In the event that indoor or outdoor sources are not readily identified or confirmed, resampling (which might include additional sub-slab vapor and indoor air sampling locations) is recommended to demonstrate that SVI mitigation actions are not needed. Based on the information available, mitigation might also be recommended when soil vapor intrusion cannot be ruled out.

Monitor: We recommend monitoring (sampling on a recurring basis), including but not necessarily limited to sub-slab vapor, basement air and outdoor air sampling, to determine whether concentrations in the indoor air or sub-slab vapor have changed and/or to evaluate temporal influences. Monitoring might also be recommended to determine whether existing building conditions (e.g., positive pressure heating, ventilation and air-conditioning systems) are maintaining the desired mitigation endpoint and to determine whether changes are needed. The type and frequency of monitoring is determined based on site-, building- and analyte-specific information, taking into account applicable environmental data and building operating conditions. Monitoring is an interim measure required to evaluate exposures related to soil vapor intrusion until contaminated environmental media are remediated.

Mitigate: We recommend mitigation to minimize current or potential exposures associated with soil vapor intrusion. The most common mitigation methods are sealing preferential pathways in conjunction with installing a sub-slab depressurization system and changing the pressurization of the building in conjunction with monitoring. The type, or combination of types, of mitigation is determined on a building-specific basis, taking into account building construction and operating conditions. Mitigation is considered a temporary measure implemented to address exposures related to soil vapor intrusion until contaminated environmental media are remediated.

These general recommendations are made with consideration being given to the additional notes on page 2.

ADDITIONAL NOTES FOR MATRIX C

This matrix summarizes actions recommended to address current and potential exposures related to soil vapor intrusion. To use the matrix appropriately as a tool in the decision-making process, the following should be noted:

- [1] The matrix is generic. As such, it may be appropriate to modify a recommended action to accommodate analyte-specific, building-specific conditions (e.g., dirt floor in basement, crawl spaces, thick slabs, current occupancy, etc.), and/or factors provided in Section 3.2 of the guidance (e.g., current land use, environmental conditions, etc.). For example, collection of additional samples may be recommended when the matrix indicates "no further action" for a particular building, but the results of adjacent buildings (especially sub-slab vapor results) indicate a need to take actions to address exposures related to soil vapor intrusion. Mitigation might be recommended when the results of multiple contaminants indicate monitoring is recommended. Proactive actions may be proposed at any time. For example, the party implementing the actions may decide to install sub-slab depressurization systems on buildings where the matrix indicates "no further action" or "monitoring." Such an action might be undertaken for reasons other than public health (e.g., seeking community acceptance, reducing costs, etc.). However, actions implemented *in lieu* of sampling will typically be expected to be captured in the final engineering report and site management plan, and might not rule out the need for post-implementation sampling (e.g., to document effectiveness or to support terminating the action).
- [2] Actions provided in the matrix are specific to addressing human exposures. Implementation of these actions does not preclude investigating possible sources of soil vapor contamination, nor does it preclude remediating contaminated soil vapor or the source of soil vapor contamination.
- [3] Appropriate care should be taken during all aspects of sample collection to ensure that high quality data are obtained. Since the data are being used in the decision-making process, the laboratory analyzing the environmental samples must have current Environmental Laboratory Approval Program (ELAP) certification for the appropriate analyte and environmental matrix combinations. Furthermore, samples should be analyzed by methods that can achieve a minimum reporting limit of 0.20 microgram per cubic meter for indoor and outdoor air samples. For sub-slab vapor samples and dirt floor soil vapor samples, a minimum reporting limit of 1 microgram per cubic meter is recommended.
- [4] Sub-slab vapor and indoor air samples are typically collected when the likelihood of soil vapor intrusion is considered to be the greatest (i.e., worst-case conditions). If samples are collected at other times (typically, samples collected outside of the heating season), then resampling during worst-case conditions might be appropriate to verify that actions taken to address exposures related to soil vapor intrusion are protective of human health.
- [5] When current exposures are attributed to sources other than soil vapor intrusion, the agencies should be given documentation (e.g., applicable environmental data, completed indoor air sampling questionnaire, digital photographs, etc.) to support a proposed action other than that provided in the matrix box and to support agency assessment and follow-up.
- [6] The party responsible for implementing the recommended actions will differ depending upon several factors, including but not limited to the following: the identified source of the volatile chemicals, the environmental remediation program, and analyte-specific, site-specific and building-specific factors.

Interim Remedial Measure Work Plan
94-17 63rd Drive, Rego Park, New York

APPENDIX B

Division of Air Resources (DAR 1) Screening Analysis

Division of Air Resources (DAR-1) Screening Analysis

Table 1. 94-17 & 94-15 63rd Drive DAR-1 Screening Level Worksheet

94-17 & 94-15 63rd Drive, Queens, New York

Calculations based on maximum sub-slab sample results from SS-2, 3/12/19 for PCE and SS-1 on 3/12/19 for TCE and cis-12 DCE .

	$\mu\text{g}/\text{m}^3$	PPMv
Tetrachloroethene (PCE) concentration:	4,030	0.585
Trichloroethene (TCE) concentration:	791	0.145
Dichloroethene (DCE) concentration:	423	0.105
Air flow rate (cubic feet per minute [cfm]):	150	

Calculate Emission Rate in Pounds/Hour (lb/hr):

Flow Rate = 150 cfm

Emission Rate (lb/hr) = flow rate * concentration (PPMv) * molecular weight * $1.581\text{E-}07$

Note that $1.581\text{E-}07 = 1/10^6 \text{ ppm-v} * 60 \text{ minutes/hour} * 1 \text{ lb-mole}/379.5 \text{ ft}^3$

Emission Rate for PCE (lb/hr) = 150 cfm * 0.585 PPMv * 165.8 * $1.581\text{E-}07$ =	0.002 lb/hr or	20.1 lb/yr
Emission Rate for TCE (lb/hr) = 150 cfm * 0.145 PPMv * 131.4 * $1.581\text{E-}07$ =	0.000 lb/hr or	4.0 lb/yr
Emission Rate for DCE (lb/hr) = 150 cfm * 0.105 PPMv * 97 * $1.581\text{E-}07$ =	0.000 lb/hr or	2.1 lb/yr

Standard Point Source Method (Appendix B – Division of Air Resources):

Hs (Height of Stack) = 25' Hb (Height of Building) = 15'

Hs/Hb = 1.67 > 1.5 , but effluent will be released horizontally, so assume no reduction for plume rise

Therefore effective stack height = Hs, H_E = 25 feet

Calculate Maximum Annual Impact (Ca)

$$\text{Ca } (\mu\text{g}/\text{m}^3) = 6 * Q_a / H_E^{2.25}$$

Q_a = Emission Rate in pounds per year calculated above

Ca for PCE ($\mu\text{g}/\text{m}^3$) =	0.09
Ca for TCE ($\mu\text{g}/\text{m}^3$) =	0.0170
Ca for DCE ($\mu\text{g}/\text{m}^3$) =	0.0091

Calculate Maximum Potential Annual Impact (Cp)

$$\text{Cp } (\mu\text{g}/\text{m}^3) = 52,500 * Q / H_E^{2.25}$$

Q = Emission Rate in pounds per hour calculated above

Cp for PCE ($\mu\text{g}/\text{m}^3$) =	0.09
Cp for TCE ($\mu\text{g}/\text{m}^3$) =	0.0169

Hs/Hb = 1.67 > 1.5 , but effluent will be released horizontally, so assume no reduction for plume rise

AGC for PCE = 4.0 $\mu\text{g}/\text{m}^3$	Ca for PCE =	0.09	< 4	OK
AGC for TCE = 0.2 $\mu\text{g}/\text{m}^3$	Ca for TCE =	0.02	< 0.2	OK
AGC for DCE = 63.0 $\mu\text{g}/\text{m}^3$	Ca for DCE =	0.01	< 63	OK

Calculate Maximum Short Term Impact (Cst)

Cst ($\mu\text{g}/\text{m}^3$) = Cp * 65

Cst for PCE ($\mu\text{g}/\text{m}^3$) =	5.61
Cst for TCE ($\mu\text{g}/\text{m}^3$) =	1.10

SGC for PCE = 300 $\mu\text{g}/\text{m}^3$	Cst for PCE =	5.61	< 300	OK
SGC for TCE = 20 $\mu\text{g}/\text{m}^3$	Cst for TCE =	1.10	< 20	OK

There is no SGC for DCE.

Since Ca for PCE and TCE are less than their respective AGC values,
no vapor phase carbon units are necessary.

**Sub-Slab Depressurization System Operations
and Maintenance Log**

SUB-SLAB DEPRESSURIZATION SYSTEM OPERATIONS AND MAINTENANCE FORM

Site Name: <u>Arbern</u> Street Address: <u>94-17 63rd Drive</u> Location: <u>Queens, NY</u> System: <u>Active Sub-Slab Depressurization System</u> Blower: _____ Blower Range: _____	Inspection Date: _____ Inspection Personnel: _____ _____
--	--

INSPECTION ITEM DESCRIPTION	Yes	No	Comments/ Actions Taken (list actions taken if "No" is checked)
Is the system operating normally?	___	___	_____
Are any warning lights on? (Please list those that are on)	___	___	_____
If there is an alarm condition, was it fixed and the system restarted?	___	___	_____
Is the blower enclosure in good condition?	___	___	_____
Are the valves (at blower and aboveground piping) in good condition?	___	___	_____
Is the vacuum filter in good condition?	___	___	_____
Does the knock-out tank need to be drained? (Record amount drained)	___	___	_____
Are aboveground piping free of cracks, leaks, and support issues?	___	___	_____
Are vacuum/pressure gauges at blower operating properly?	___	___	_____
Are interior piping free of cracks, leaks, and support issues?	___	___	_____

List maintenance activities that were performed or _____
 other comments about the system: _____

Blower Influent	Vacuum (in. w.c.)	Comments
Blower Effluent	Pressure (in. w.c.)	Comments
Soil Vapor Monitoring Point*	Vacuum (in. w.c.)	Comments
SV-1		
SV-2		

PERFORM THE FOLLOWING ONLY IF A VACUUM READING AT THE SVMPS IS LESS THAN 0.004 IN. W.C.

INSPECTION ITEM DESCRIPTION			Yes	No	Comments/ Actions Taken (list actions taken if "No" is checked)
Are interior vacuum gauges operating properly?			<input type="checkbox"/>	<input type="checkbox"/>	
Suction Point*	Vacuum (in. w.c.)	Comments			
SP-1					
SP-2					
SP-3					
SP-4					
SP-5					

in. w.c. - inches of water

* Refer to Drawing 1 for locations of Soil Vapor Monitoring Points and Suction Points

Interim Remedial Measure Work Plan
94-17 63rd Drive, Rego Park, New York

APPENDIX D

Health and Safety Plan



Site-Specific Health and Safety Plan

94-17 63rd Drive
Flushing, New York

June 28, 2019

Prepared for:

Arbern Queens Commercial Properties LLC
725 Church Street
Brooklyn, New York 11218

Prepared by:

**Roux Environmental Engineering
and Geology, D.P.C.**
209 Shafter Street
Islandia, New York 11749

Table of Contents

Site-Specific Emergency Information	1
Emergency Phone Numbers	1
Emergency Medical Facilities	1
1. Introduction	3
1.1 Roles and Responsibilities	3
2. Background	5
2.1 Site Description	5
2.2 Site History	5
2.3 Known and Potential Releases of Hazardous Substances at the Site.....	5
3. Scope of Work.....	6
4. Site Control	7
4.1 Site Map.....	7
4.2 Site Access	7
4.3 Buddy System.....	7
4.4 Site Communications.....	7
4.5 Site Work Zones	7
5. Job Hazard Evaluation	9
5.1 Employee Notification of Hazards and Overall Site Information Program	9
6. Emergency Response Plan.....	10
6.1 Emergency Response	10
6.2 Emergency Alerting and Evacuation	10
6.3 Emergency Medical Treatment and First Aid	10
6.4 Adverse Weather Conditions.....	11
6.5 Electrical Storm Guidelines	12
7. Safety Procedures.....	13
7.1 Training.....	13
7.2 Site-Specific Safety Briefings for Visitors	13
7.3 HASP Information and Site-Specific Briefings for Workers.....	13
7.4 Medical Surveillance.....	13
7.4.1 Site Medical Surveillance Program	14
7.4.2 Medical Recordkeeping Procedures	14
7.4.3 Program Review.....	14
7.5 Personnel Protection	15
7.6 Monitoring	15
7.7 Tailgate Safety Meetings	16
7.8 Spill Containment	17
7.8.1 Initial Spill Notification and Response.....	17
7.8.2 Spill Evaluation and Response	17
7.9 Decontamination.....	17
7.9.1 Decontamination Procedures for Personnel and PPE.....	17

Table of Contents (Continued)

- 7.9.2 Decontamination Procedures for Equipment 18
 - 7.9.3 Monitoring the Effectiveness of Decontamination Procedures 18
- 7.10 Confined Space Entry..... 18
- 7.11 Client and Site-Specific 19
- 7.12 Unusual or Significant Risks..... 19
- 7.13 Activity-Specific 19
- 8. Field Team Review 21
- 9. Approvals 22

Table

- 1. Toxicological Properties of Hazardous Substances Present at the Site

Figures

- 1. Site Location Map
- 2. Site Plan
- 3. Route to Hospital and Urgent Care Facility

Appendices

- A. Job Safety Analysis (JSA) Forms
- B. SDSs for Chemicals Used
- C. Incident Investigation and Reporting Program
- D. Heavy Equipment Exclusion Zone Policy
- E. Subsurface Utility Clearance Management Program
- F. Personal Protective Equipment Management Program
- G. Generic Community Air Monitoring Plan (CAMP)
- H. Health and Safety Meeting/Daily Meeting Log

Site-Specific Emergency Information

Emergency Phone Numbers

Most emergency services can be obtained by calling **911**. Where 911 service is not available, use the telephone numbers provided in the below table. The following is a master emergency phone list for use by the project management personnel. A more condensed version of the emergency numbers listed below will be posted throughout project work areas. Emergencies encountered on the site will be responded to by a combination of off-site emergency services and site personnel.

Emergency Contact Information			
Site Personnel			
Title	Contact	Telephone	
Project Manager (PM)	Rachel Miller	(631) 630-2436 (631) 834-1458	
Site Health and Safety Officer/ Site Supervisor (SHSO/SS)	TBD when field work scheduled	TBD	
SHSO/SS Alternate	TBD when field work scheduled	TBD	
Outside Assistance			
Agency	Contact	Telephone	Address/Location
Ambulance/EMS	Forest Hills Volunteer Ambulance Corps, Inc.	(718) 793-2055	92-29 Metropolitan Avenue Forest Hills, NY 11375
Police	NYPD 112 th Precinct	(718) 520-9311	68-40 Austin Street Forest Hills, NY 11375
Fire	FDNY Engine 287/Ladder 136/ Battalion 46	911	86-53 Grand Avenue Elmhurst, NY 11373

For location of the emergency response meeting area, see Figure 2.

For directions to Long Island Jewish Forest Hills, see Figure 3.

For directions to Northwell Health, see Figure 4.

Emergency Medical Facilities

Hospital

Long Island Jewish Forest Hills
102-01 66th Road, Forest Hills, NY 11375

Hospital Phone #: (718) 830-4000

- Head northeast on 63rd Drive toward Saunders Street
- Turn right onto Queens Boulevard

- Turn left onto 67th Avenue
- Turn left onto Yellowstone Boulevard
- Turn left onto 66th Road

Hospital entrance will be on the right.

Urgent Care

Northwell Health
58-28 99th Street, Corona, NY 11368

Urgent Care Phone #: (347) 751-6740

- Head northeast on 63rd Drive toward Saunders Street
- turn left onto 99th Street
- turn right onto Horace Harding Expressway
- turn left onto 108th Street
- turn left at the first cross street onto Horace Harding Expressway
- turn right onto 99th Street

Urgent Care facility will be on the Left.

1. Introduction

[Do not make any changes to this section other than where highlighted.]

This site-specific Health and Safety Plan (HASP) has been prepared by Roux Environmental Engineering and Geology, D.P.C. (Roux) for use during the IRM Work Plan at the (“the Site”), located at 94-17 63rd Drive, Flushing, NY (see Figure 1). These activities fall within the scope of operations covered by the Occupational Safety and Health Administration (OSHA) standards promulgated at 29 CFR 1910.120 and 29 CFR 1926.65, both commonly referred to as the Hazardous Waste Operations and Emergency Response (HAZWOPER) Standard. In accordance with the HAZWOPER Standard, this site-specific HASP was prepared to address the safety and health hazards associated with the SSDS installation activities being performed at the Site by Roux and to provide requirements and procedures for the protection of Roux employees, subcontractor personnel, government oversight personnel, Site personnel, and the general public. It also addresses client- and Site-specific requirements for health and safety.

Implementation of this HASP is the joint responsibilities of the project manager, the site health and safety officer, and all field staff, with assistance from the project principal and the office health and safety manager. The project manager for this project is Rachel Miller. Based on the scope of work, the field oversight personnel will act as both the Site Health and Safety Officer (SHSO) as well as the Site Supervisor (SS). If necessary, an alternate SS/SHSO will be identified during the project as needed.

1.1 Roles and Responsibilities

Overall Roles and Responsibilities (R&Rs) of Roux personnel are provided in Roux’s Policies and Procedures Manual. Only those R&Rs specific to HASP requirements are listed below.

Project Manager (PM)

The PM has responsibility and authority to direct all work operations. The PM coordinates safety and health functions with the Site Health and Safety Officer (SHSO), has the authority to oversee and monitor the performance of the SHSO, and bears ultimate responsibility for the proper implementation of this HASP. The specific duties of the PM are:

- preparing and coordinating the site work plan;
- providing site supervisor(s) with work assignments and overseeing their performance; Coordinating safety and health efforts with the SSHO;
- ensuring effective emergency response through coordination with the Emergency Response Coordinator (ERC); and
- serving as primary site liaison with public agencies and officials and site contractors.

Site Health and Safety Officer (SHSO)

The SHSO has full responsibility and authority to develop and implement this HASP and to verify compliance. The SHSO reports to the Project Manager. The SHSO is on site or readily accessible to the site during all work operations and has the authority to halt site work if unsafe conditions are detected. The specific responsibilities of the SHSO include:

- managing the safety and health functions on this site;
- serving as the site’s point of contact for safety and health matters;

- ensuring site monitoring, worker training, and effective selection and use of PPE;
- assessing site conditions for unsafe acts and conditions and providing corrective action;
- assisting the preparation and review of this HASP;
- maintaining effective safety and health records as described in this HASP; and
- coordinating with the Site Supervisor(s) and others as necessary for safety and health efforts.

Site Supervisor

The Site Supervisor is responsible for field operations and reports to the Project Manager (PM). The Site Supervisor ensures the implementation of the HASP requirements and procedures in the field. The specific responsibilities of the Site Supervisor include:

- executing the work plan and schedule as detailed by the PM;
- coordination with the SHSO on safety and health; and
- ensuring site work compliance with the requirements of this HASP.

Site Workers

Site workers are responsible for complying with this HASP, using the proper PPE, reporting unsafe acts and conditions, and following the work and safety and health instructions of the Project Manager (PM), SHSO, and Site Supervisor.

2. Background

Relevant background information is provided below, including a general description of the Site; a brief review of the Site's history with respect to hazardous material use, handling, and/or storage; and a review of known and potential releases of hazardous substances at the Site.

2.1 Site Description

The Site is located to the west side of 63rd Drive, approximately 50 feet south of the intersection of Saunders Street and 63rd Drive in Rego Park (Queens), New York (Figure 1). The Site is identified on the New York City Tax Map as Block 3081, Lot 125 (Figure 2). The Site currently consists of an approximate 0.057 acre lot and is currently developed with a single story commercial building with a full basement, 1,875 square foot building. Directly adjacent to the Site is a wine and liquor retail store to the north, a jewelry exchange store to the south, a dental office and beauty supply store to the east (across 63rd Drive), and a Kosher meats and income tax office to the west. The building is subdivided into two individual storefront units, with the larger unit encompassing approximately 75% of the first floor and entire basement. Entry to each of the two storefront units is at the ground level which is level with the city sidewalk. A variety of commercial tenants have previously occupied each individual storefront units since the Site building was constructed until it was purchased by Requestor. Currently, both storefront units are vacant.

2.2 Site History

The Site was developed sometime in the early 1920s as a single-family residence . The general current Site layout and building structure appear in 1931 and is consistent with the current Site configuration, with no change since 1931. Various commercial tenants have occupied the individual storefront units since the building was constructed, with dry cleaning operations occurring from approximately 1983 until 2018.

A dry cleaner, Dalk Cleaners, operated at the Site from approximately 1983 to 2018. Other noted operators of the Site include Davan Jewelers, Just for Me Inc, Ronells Discount Stores, Children's Clothes Shop, and a wine and liquor store. These former operations may have used hazardous materials during their operations which could have impacted the subsurface soil, soil vapor, and/or groundwater beneath the Site.

Based upon information identified in historic documents (Appendix C), the following areas of concern (AOCs) were identified:

- Former dry-cleaning operations.

2.3 Known and Potential Releases of Hazardous Substances at the Site

Based upon previous investigations conducted to date, the primary contaminants of concern for the Site include chlorinated volatile organic compounds (CVOCs) in soil, soil vapor, and indoor air.

3. Scope of Work

The scope of work for the IRM consists of the following tasks:

- Site mobilization and Site preparation;
- Installation of the SSDS components;
- Waste disposal (assumed to be minimal); and
- Documentation.

If there are any changes with the scope a revision of the HASP will be required to address any new hazards.

4. Site Control

This site control program is designed to reduce the spread of hazardous substances from contaminated areas to clean areas, to identify and isolate contaminated areas of the site, to facilitate emergency evacuation and medical care, to prevent unauthorized entry to the site, and to deter vandalism and theft.

4.1 Site Map

A map of this site, showing site boundaries, designated work zones, and points of entry and exit is provided in Figure 2.

4.2 Site Access

Access to the site is restricted to reduce the potential for exposure to its safety and health hazards. During hours of site operation, site entry and exit is authorized only at the points identified in Figure 2. Access for all equipment will be through designated Site entries and exits yet to be established. Roux will maintain Site access throughout the work day and lock all entrances and exits at the end of the day.

4.3 Buddy System

While working in the Exclusion Zone, site workers use the buddy system. The buddy system means that personnel work in pairs and stay in close visual contact to be able to observe one another and summon rapid assistance in case of an emergency. The responsibilities of workers using the buddy system include:

- Remaining in close visual contact with partner;
- Providing partner with assistance as needed or requested;
- Observing partner for signs of heat stress or other difficulties;
- Periodically checking the integrity of partner's PPE; and
- Notifying the site manager or other site personnel if emergency assistance is needed.

4.4 Site Communications

The following communication equipment is used to support on-site communication: visual hand signals will be used during the use of heavy equipment, and workers will have cell phones on-Site. Should multiple operations be occurring at the Site concurrently, radios shall be used for communication, if determined to be necessary.

A current list of emergency contact numbers shall be posted at the worksite and provided to site workers as appropriate.

4.5 Site Work Zones

This site is divided into three (3) major zones, described below and shown in Figure 2. These zones are characterized by presence or absence of biological and chemical hazards and the activities performed within them. Zone boundaries are clearly marked at all times and the flow of personnel among the zones is controlled. The site is monitored for changing conditions that may warrant adjustment of zone boundaries. Zone boundaries are adjusted as necessary to protect personnel and clean areas. Whenever boundaries are adjusted, zone markings are also changed and workers are immediately notified of the change.

Exclusion Zone

The area where contamination exists is the Exclusion Zone (EZ). All areas where excavation and handling of contaminated materials take place are considered the EZ. This zone will be clearly delineated by orange high visibility fencing. Safety tape may be used as a secondary delineation within the EZ. The zone delineation markings may be opened in areas for varying lengths of time to accommodate equipment operation or specific construction activities. The SHSO may establish more than one EZ where different levels of protection may be employed or where different hazards exist. Personnel are not allowed in the EZ without:

- A buddy (co-worker)
- Required minimum level PPE
- Medical Authorization
- Training certification
- Requirement to be in the zone

Contamination Reduction Zone

A Contamination Reduction Zone (CRZ) is established between the exclusion zone and the support zone. The CRZ contains the Contamination Reduction Corridor (CRC) and provides an area for decontamination of personnel and equipment. The CRZ will be used for general Site entry and egress in addition to access for heavy equipment and emergency support services. Personnel are not allowed in the CRZ without:

- A buddy (co-worker)
- Appropriate PPE
- Medical authorization
- Training certification
- Requirement to be in the zone

Support Zone

The Support Zone (SZ) is an uncontaminated area that will be the field support area for the Site operations. The SZ will contain the temporary project trailers and provides for field team communications and staging for emergency response. Appropriate sanitary facilities and safety equipment will be located in this zone. Potentially contaminated personnel or materials are not allowed in this zone. The only exception will be appropriately packaged/decontaminated and labeled samples.

5. Job Hazard Evaluation

Roux's work at the Site is expected to entail a variety of physical, chemical, and biological hazards, all of which must be sufficiently managed to allow the work to be performed safely. Some of the hazards are Site-specific, i.e., they are associated with the nature, physical characteristics, and/or routine operation of the Site itself, while others are activity-specific, i.e., they are associated with (or arise from) the particular activity being performed. The various hazards can be grouped into the following categories:

Caught/Crushed – the potential to become caught in, under, between, or by an object or parts of an object, such as equipment with parts that open and close or move up and down (“pinch points”) or equipment that rotates, and the accompanying potential to have body parts cut, mangled, or crushed thereby.

Contact – the potential to be struck by or against moving or stationary objects that can cause physical injury, such as heavy machinery, overhead piping, moving vehicles, falling objects, and equipment (including tools and hand-held equipment) or infrastructure with the ability to cut or impale.

Energy Sources – the potential for bodily harm associated with energy sources, most notably electricity, but also including latent energy sources such as compressed air and equipment under tension (which when released could cause injurious contact or a fall).

Ergonomics – the potential for musculoskeletal injury associated with lifting/carrying, pushing/pulling, bending, reaching, and other physical activity attributable to poor body position/mechanics, repetitive motion, and/or vibration.

Exposure – the potential for injury/illness due to physical, chemical, or biological exposures in the work environment, including but not limited to temperature extremes, solar radiation, and noise (physical), chemical splashes and hazardous atmospheres (chemical), and animal/insect bites and poisonous plants (biological).

Falls – the potential to slip or trip and thus fall or drop a load, resulting in bodily injury to oneself or others

The foregoing is intended to provide Roux employees with a general awareness of the hazards involved with Site work. A more detailed review of the potential hazards associated with each specific activity planned for the Site (or ongoing activity, as the case may be) is provided in the activity-specific Job Safety Analysis (JSA) forms in Appendix A. As can be seen in the JSA forms, the hazards are identified by category per the above, and specific measures designed to mitigate/manage those hazards are also identified. In preparing the JSA forms, all categories of hazards were considered, and all anticipated potential hazards were identified to the extent possible based on the experience of the personnel preparing and reviewing the JSA forms. However, there is always the possibility for an unanticipated hazard to arise, potentially as condition change over the course of the workday. Roux personnel must maintain a continual awareness of potential hazards in the work zone, regardless of whether the hazard is identified in the JSA form. Particular attention should be paid to hazards associated with exposure to hazardous substances (see Table 1 for a listing of the hazardous substances most likely to be encountered in environmental media at the Site) and to Site personnel being located “in the line of fire” with respect to moving equipment, pinch points, and latent energy, e.g., being located or having body parts located within the swing radius of an excavator, between two sections of pipe being connected, below a piece of suspended equipment, or adjacent to a compressed air line.

5.1 Employee Notification of Hazards and Overall Site Information Program

The information in the JSAs and safety data sheets is made available to all employees and subcontractors who could be affected by it prior to the time they begin their work activities. Modifications to JSAs are communicated during routine pre-work briefings.

6. Emergency Response Plan

This emergency response plan details actions to be taken in the event of site emergencies. The PM and SHSO is responsible for the implementation of emergency response procedures onsite. The SHSO/PM provides specific direction for emergency action based upon information available regarding the incident and response capabilities and initiates emergency procedures and notification of appropriate authorities. In the event of an emergency, site personnel are evacuated and do not participate in emergency response activities, response is facilitated through external emergency services.

6.1 Emergency Response

The SHSO, after investigating the incident and relevant information, shall determine the level of response required for containment, rescue and medical care. Limited on-site emergency response activities could occur therefore the SHSO is responsible for notifying external emergency response agencies. The SHSO provides relevant information to the responding organizations, including but not limited to the hazards associated with the emergency incident, potential containment problems, and missing site personnel.

6.2 Emergency Alerting and Evacuation

If evacuation notice is given, site workers leave the worksite, if possible, by way of the nearest exit. Appropriate primary and alternate evacuation routes and assembly areas have been identified and are shown on the Site Plan (Figure 2). The routes and assembly area will be determined by conditions at the time of the evacuation based on wind direction, the location of the hazard source, and other factors as determined by SHSO/PM.

Personnel exiting the site gather at a designated assembly point. To determine that everyone has successfully exited the site, personnel will be accounted for at the assembly site. If any worker cannot be accounted for, notification is given to so that appropriate action can be initiated. Subcontractors on this site have coordinated their emergency response plans to ensure that these plans are compatible and potential emergencies are recognized, alarm systems are clearly understood, and evacuation routes are accessible to all personnel relying upon them.

6.3 Emergency Medical Treatment and First Aid


In the event of a work-related injury or illness, employees are required to follow procedures outlined below. All work-place injury and illness situations require Roux's Project and Corporate Management Team to be notified when an injury / illness incident occurs, and communication with the contracted Occupational Health Care Management Provider, AllOne Health, is initiated. The Injury/Illness Notification Flowchart is provided below and within Roux's Incident Investigation and Reporting program included as Appendix D.

If onsite personnel require any medical treatment, the following steps will be taken:

- a. Notify Roux's Project and Corporate Management Team for any work-related injury and/or illness occurrence, and communicate with the contracted Occupational Health Care Management Provider, AllOne Health, immediately following the notifications provided above.
- b. Based on discussions with the Project Team, Corporate Management and the AOH evaluation, if medical attention beyond onsite First Aid is warranted, transport the injured / ill person (IP) to the Urgent Care Center, or notify the Fire Department or Ambulance Emergency service and request an ambulance or transport the victim to the hospital, and continue communications with Corporate

Management Team. A Hospital Route and Urgent Care Facility map with directions to Long Island Jewish and Northwell Health, respectively, is included in Figure 3 and Figure 4.

- c. Decontaminate to the extent possible prior to administration of first aid or movement to medical or emergency facilities.
- d. First aid medical support will be provided by onsite personnel trained and certified in First Aid, Cardio Pulmonary Resuscitation (CPR), Automatic External Defibrillation (AED), and Blood-Borne Pathogens (BBP) Awareness, until relieved by emergency medical services (EMS).
- e. The SHSO and Project Manager will perform a Loss Investigation (LI) and the Project Team will complete the final Loss Report. If a Roux employee is involved in a vehicular incident, the employee must also complete the Acord Automobile Loss Notice.

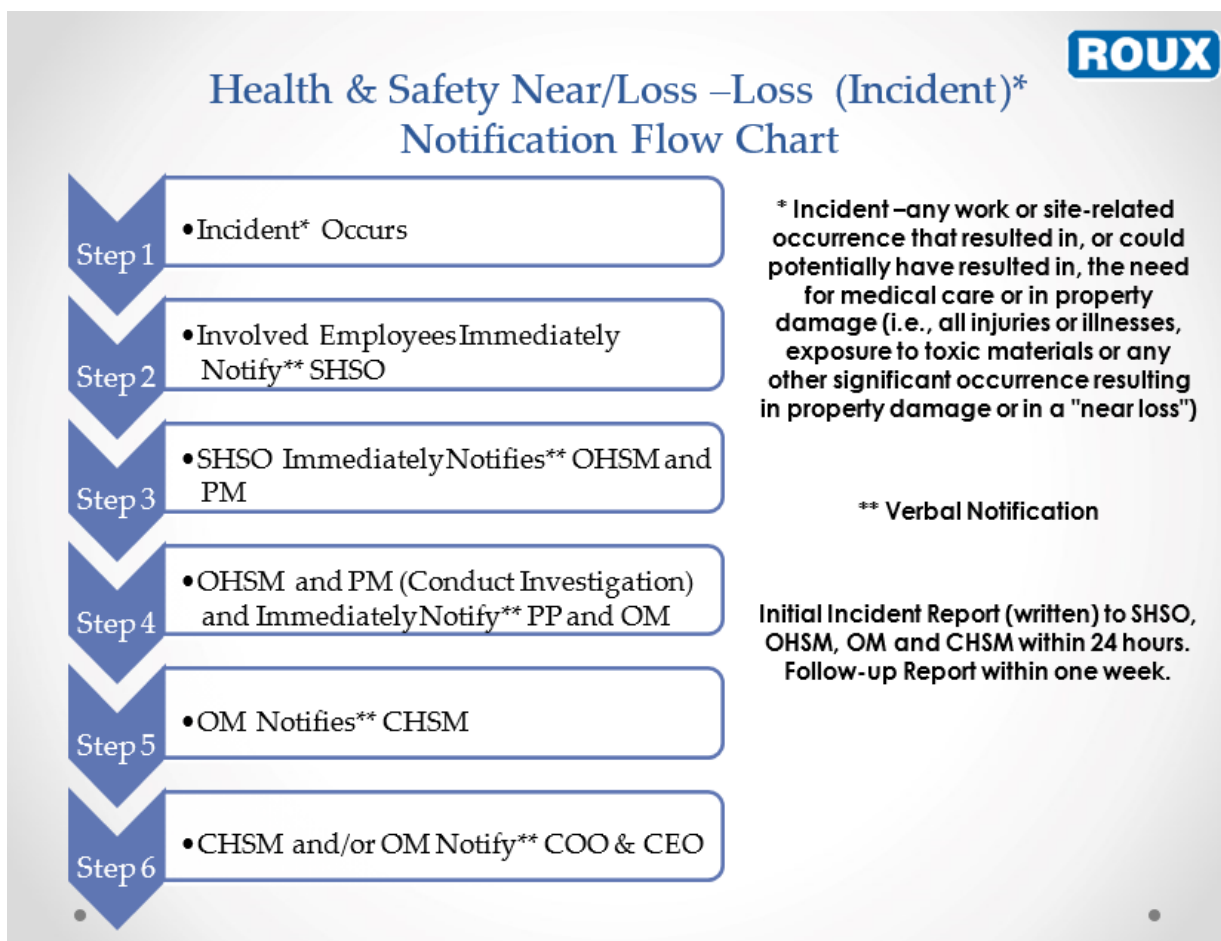

6.4 Adverse Weather Conditions

In the event of adverse weather conditions, the SHSO or project principal will determine if work can continue without sacrificing the health and safety of all field workers. Some of the items to be considered prior to determining if work should continue are:

- Potential for heat stress and heat-related injuries.
- Potential for cold stress and cold-related injuries.
- Treacherous weather-related conditions.
- Limited visibility.

- Electrical storm potential.

Site activities will be limited to daylight hours and acceptable weather conditions. Inclement working conditions include heavy rain, fog, high winds, and lightning. Observe daily weather reports and evacuate if necessary in case of inclement weather conditions.

6.5 Electrical Storm Guidelines

In the event that lightning and/or thunder are observed while working onsite, all onsite activities shall stop and personnel shall seek proper shelter (e.g., substantial building, enclosed vehicle, etc.). Work shall not resume until the threat of lightning has subsided and no lightning or thunder has been observed for 30 minutes. If the possibility of lightning is forecast for the day, advise the onsite personnel on the risks and proper procedure at the pre-work safety briefing. Continuously monitor for changing weather conditions and allow enough time to properly stop work if lightning is forecast.

7. Safety Procedures

This section of the HASP presents the specific safety procedures to be implemented during Roux's activities at the Site in order to protect the health and safety of various on-site personnel. Minimum OSHA-mandated procedures are presented first, followed by client- and Site-specific procedures. Lastly, activity-specific procedures are discussed. These Site- and activity-specific procedures supplement the general safety procedures included in Roux's Corporate Health and Safety Manual, which also must be followed in their entirety.

7.1 Training

At a minimum, Site personnel who will perform work in areas where there exists the potential for toxic exposure will be health and safety-trained prior to performing work on site per OSHA 29 CFR 1910.120(e) and 29 CFR 1926.65(e). More specifically, all Roux, subcontractor, and other personnel engaged in sampling and remedial activities at the Site and who are exposed or potentially exposed to hazardous substances, health hazards, or safety hazards must have received at a minimum the 40 hour initial HAZWOPER training consistent with the requirements of 29CFR 1910.120(e)(3)(i) training and a minimum of 3 days' actual field experience under the direct supervision of a trained experienced supervisor, plus 8 hours of refresher training on an annual basis. Depending on tasks performed, less training may be permitted. Evidence of such training must be maintained at the Site at all times. Furthermore, all on-site management and supervisory personnel directly responsible for or who supervise the employees engaged in Site remedial operations, must have received an additional 8 hours of specialized training at the time of job assignment on topics including, but not limited to, the employer's safety and health program and the associated employee training program, personal protective equipment program, spill containment program, and health hazard monitoring procedure and techniques, plus 8 hours of refresher training on an annual basis.

Roux personnel training records are maintained in a corporate database with records available upon request from either the OHSM/SHSO/CHSM or Human Resources Department.

7.2 Site-Specific Safety Briefings for Visitors

A site-specific briefing is provided to all site visitors who enter this site beyond the site entry point. For visitors, the site-specific briefing provides information about site hazards, the site lay-out including work zones and places of refuge, the emergency alarm system and emergency evacuation procedures, and other pertinent safety and health requirements as appropriate.

7.3 HASP Information and Site-Specific Briefings for Workers

Site personnel review this HASP and are provided a site-specific tailgate briefing prior to the commencement of work to ensure that employees are familiar with this HASP and the information and requirements it contains as well as relevant JSAs. Additional briefings are provided as necessary to notify employees of any changes to this HASP as a result of information gathered during ongoing site characterization and analysis. Conditions for which we schedule additional briefings include, but are not limited to: changes in site conditions, changes in the work schedule/plan, newly discovered hazards, and incidents occurring during site work.

7.4 Medical Surveillance

The medical surveillance section of the Health and Safety Plan describes how worker health status is monitored at this site. Medical surveillance is used when there is the potential for worker exposure to

hazardous substance at levels above OSHA permissible exposure limits or other published limits. The purpose of a medical surveillance program is to medically monitor worker health to ensure that personnel are not adversely affected by site hazards. The provisions for medical surveillance at this site are based on the site characterization and job hazard analysis found in Section 4 of this HASP and are consistent with OSHA requirements in 29 CFR 1910.120(f).

7.4.1 Site Medical Surveillance Program

Medical surveillance requirements are based on a worker's potential for exposure as determined by the site characterization and job hazard analysis documented in Section 4 and JSAs within Appendix A of this HASP and in compliance with the requirements of 29 CFR 1910.120(f)(2). Based on site information and use of direct reading instruments, limited use of respirators (less than 30 days per year), and the absence of an employee-staffed HAZMAT team, a limited medical surveillance program is required and implemented at this site. The medical surveillance program provides that:

1. Workers assigned to tasks requiring the use of respirators receive medical examinations in accordance with 29 CFR 1910.134(e) to ensure they are physically capable to perform the work and use the equipment.
2. If a worker is injured, becomes ill, or develops signs or symptoms of possible over-exposure to hazardous substance or health hazards, medical examinations are provided to that worker as soon as possible after the occurrence and as required by the attending physician.
3. These medical examinations and procedures are performed by or under the supervision of a licensed physician and are provided to workers free of cost, without loss of pay, and at a reasonable time and place. In addition, the need to implement a more comprehensive medical surveillance program will be re-evaluated after any apparent over-exposure.

7.4.2 Medical Recordkeeping Procedures

Medical recordkeeping procedures are consistent with the requirements of 29 CFR 1910.1020 and are described in the company's overall safety and health program. A copy of that program is available at our Islandia, NY office.

The following items are maintained in worker medical records:

- Respirator fit test and selection
- Physician's medical opinion of fitness for duty (pre-placement, periodic, termination)
- Physician's medical opinion of fitness for respirator protection (pre-placement, periodic)
- Exposure monitoring results

7.4.3 Program Review

The medical program is reviewed to ensure its effectiveness. The Corporate Health and Safety Manager in coordination with the Human Resources Director is responsible for this review. At minimum, this review consists of:

- Review of accident and injury records and medical records to determine whether the causes of accidents and illness were promptly investigated and whether corrective measures were taken wherever possible;
- Evaluation of the appropriateness of required medical tests based on site exposures; and
- Review of emergency treatment procedures and emergency contacts list to ensure they were site-specific, effective, and current.

7.5 Personnel Protection

Site safety and health hazards are eliminated or reduced to the greatest extent possible through engineering controls and work practices. Where hazards are still present, a combination of engineering controls, work practices and PPE are used to protect employees. Appropriate personal protective equipment (PPE) shall be worn by Site personnel when there is a potential exposure to chemical hazards or physical hazards (e.g., falling objects, flying particles, sharp edges, electricity and noise), as determined by the SHSO. The level of personal protection, type and kind of equipment selected will depend on the hazardous conditions and in some cases cost, availability, compatibility with other equipment, and performance. An accurate assessment of all these factors will be made before work can be safely executed.

Roux maintains a comprehensive written PPE program that addresses proper PPE selection, use, maintenance, storage, fit and inspection. PPE to be used at the Site will meet the appropriate American National Standards Institute (ANSI) standards and the following OSHA (General Industry) standards for minimum PPE requirements.

The minimum level of PPE for entry onto the Site is Level D. The following equipment shall be worn:

- Work uniform (long pants, sleeved shirt)
- Hard hat
- Steel or composite toe work boots
- Safety Glasses (must comply with one of the following ANSI/ISEA Z87.1-2010, ANSI Z87.1-2003, ANSI Z87.1-2003)
- Boot Covers (as needed)
- Hearing Protection (as needed)
- High visibility clothing (shirt/vest)
- Hand Protection (e.g., minimum cut resistance meeting ANSI 105-2000 Level 2)

Note that jewelry shall be removed or appropriately secured to prevent it from becoming caught in rotating equipment or unexpectedly snagged on a fixed object. (e.g., wrist watches bracelets, rings, chains and necklaces, open earrings). Do not wear loose clothing and all shoulder length hair should be tied back.

Site specific PPE ensembles and materials are identified within task specific JSAs located within **Appendix A**, and any upgrades or downgrades of the level of protection (i.e., not specified in the JSA) must be immediately communicated to all Roux personnel and subcontractors as applicable. PPE is used in accordance with manufacturer's recommendations.

7.6 Monitoring

An air monitoring program is important to the safety of on- and off-Site personnel. A preliminary survey, to establish background conditions in the immediate sampling area, may be made prior to the initiation of Site work including, but not limited to, monitoring wind direction and approximate temperature during all invasive site activities. This survey will be conducted with the appropriate air monitoring instrument(s) as warranted by the field activity. Once this survey has been complete, any change in the type of PPE will be determined.

Air monitoring may be performed to verify that the proper level of equipment is used and to determine if increased protection or work stoppage is required. The following equipment may be used to monitor conditions:

- A Photoionization Detector (PID) with lamo energy of 10.6 eV will be used to provide direct readings of organic vapor concentrations during intrusive activities to determine that personnel protection is adequate. Concentrations shall be recorded during intrusive activities with the potential to encounter contaminant vapors.
- In accordance with DER-10 Technical Guidance for Site Investigation and Remediation dated May 1020 (DER-10) issued by the New York State Department of Environmental Conservation (NYSDEC), a community air monitoring program (CAMP) will be implemented during intrusive Site activities. The generic CAMP as provided in DER-10, Appendix 1A, is included in Appendix G of this HASP and includes action levels.

Monitoring equipment will be calibrated in accordance with applicable regulatory requirements and manufacturer specifications.

Below are monitoring action levels for Site-specific chemicals of concern. In the event that PID readings above the thresholds identified below are sustained for 5 minutes in the breathing zone, worker protection will require upgrading following notification to the OHSM and applicable parties (e.g., client, board of health, regulators, etc.).

OVM/Multi-gas Meter Action Levels

Action Levels for Respiratory Protection	
OVM Reading in Breathing Zone (ppm)	
<5	No Action
≥5 - <25	Level C
≥25	Cease Field Operations
Multi-gas Reading in Breathing Zone (%)	
LEL ≥2	Cease Field Operations
O ₂ <19.5 or >21.5	Cease Field Operations

If PID measurements exceed 25 ppm-v above background for five minute in the breathing zone, work activities will cease until airborne vapor levels can be reduced to less than 25 ppm-v and are quantified or the SHSO determines alternate methods to be followed in order to proceed.

7.7 Tailgate Safety Meetings

A designated Site worker will provide daily safety briefings (e.g., tailgate meetings) including, but not limited to, the following scenarios:

- When new operations are to be conducted;
- Whenever changes in work practices must be implemented; and
- When new conditions are identified and/or information becomes available.

Daily safety briefings shall be recorded on the Roux Daily Tailgate Health and Safety Meeting Log/Daily Site Safety Checklist, and all completed forms will become a part of the project file. The Safety Meeting Log is provided in Appendix H of this HASP.

7.8 Spill Containment

Spill containment equipment and procedures should, at a minimum, meet the requirements of the facility's Spill Prevention, Control and Countermeasure Plan, if applicable. Otherwise, spill containment equipment and procedures must be considered depending on the task including, but not limited to, chemical/product transfer points and handling.

7.8.1 Initial Spill Notification and Response

Any worker who discovers a hazardous substance spill will immediately notify the SHSO/SS. The worker will, to his/her best ability, report the hazardous substance involved, the location of the spill, the estimated quantity of material spilled, the direction/flow of the spill material, related fire/explosion incidents, and any associated injuries without compromising their own safety.

7.8.2 Spill Evaluation and Response

In coordination with the SHSO/SS, the PM (Rachel Miller) is responsible for evaluating spills and determining the appropriate response. When this evaluation is being made, the spill area will be isolated and demarcated to the extent possible. If necessary to protect nearby community members, notification of the appropriate authorities is made by the PM as appropriate. On-site response is limited to small spills (e.g., <10 gallons), large spills require external emergency responders who will be contacted by the SHSO.

7.9 Decontamination

The decontamination section of the HASP describes how personnel and equipment are decontaminated when they leave the Exclusion Zone. This section also describes how residual waste from decontamination processes is disposed. The site decontamination procedures are designed to achieve an orderly, controlled removal or neutralization of contaminants that may accumulate on personnel or equipment. These procedures minimize worker contact with contaminants and protect against the transfer of contaminants to clean areas of the site and off-site. They also extend the useful life of PPE by reducing the amount of time that contaminants contact and can permeate PPE surfaces. Decontamination is facilitated within the contamination reduction zone at this site.

7.9.1 Decontamination Procedures for Personnel and PPE

The following are general decontamination procedures established and implemented at this site.

- Decontamination is required for all workers exiting a contaminated area. Personnel may re-enter the Support Zone only after undergoing the decontamination procedures described below in the next section.
- Protective clothing is decontaminated, cleaned, laundered, maintained and/or replaced as needed to ensure its effectiveness.
- PPE used at this site that requires maintenance or parts replacement is decontaminated prior to repairs or
- PPE used at this site is decontaminated or prepared for disposal on the premises. Personnel who handle contaminated equipment have been trained in the proper means to do so to avoid hazardous exposure.
- This site uses an off-site laundry for decontamination of PPE. The site has informed that facility of the hazards associated with contaminated PPE from this site.

- The site requires and trains workers that if their permeable clothing is splashed or becomes wetted with a hazardous substance, they will immediately exit the work zone, perform applicable decontamination procedures, shower, and change into uncontaminated clothing.
- Procedures for disposal of decontamination waste meet applicable local, State, and Federal regulations.

7.9.2 Decontamination Procedures for Equipment

All tools, equipment, and machinery from the Exclusion Zone or CRZ are decontaminated in the CRZ prior to removal to the Support Zone. Equipment decontamination procedures are designed to minimize the potential for hazardous skin or inhalation exposure and to avoid cross-contamination and chemical incompatibilities.

General Equipment Decontamination Procedures:

1. Decontamination is required for all equipment exiting a contaminated area. Equipment may re-enter the Support Zone only after undergoing the equipment decontamination procedures.
2. Vehicles that travel regularly between the contaminated and clean areas of the site are carefully decontaminated each time they exit the Exclusion Zone and the effectiveness of that decontamination is monitored to reduce the likelihood that contamination will be spread to other parts of the site.
3. Particular attention is given to decontaminating tires, scoops, and other parts of heavy equipment that are directly exposed to contaminants and contaminated soil.

The following items may be used to decontaminate equipment:

- Fresh water rinse;
- Non-phosphorus detergent wash;
- Distilled water rinse;
- Acetone rinse;
- Distilled water rinse; and
- A steam cleaner or pressure washer (heavy equipment only).

7.9.3 Monitoring the Effectiveness of Decontamination Procedures

Visual examination and sampling are used to evaluate the effectiveness of decontamination procedures. Visual examination is used to ensure that procedures are implemented as described and that they appear to control the spread of contaminants under changing site conditions. Visual examination is also used to inspect for signs of residual contamination or for contaminant permeation of PPE.

Personnel who work in contaminated areas of the site, either the Contamination Reduction Zone (CRZ) or the Exclusion Zone, are trained in the principles and practices of decontamination described in this section of the HASP and in related SOPs. If site procedures are changed as a result of inspection and monitoring, all affected employees are notified of these changes.

7.10 Confined Space Entry

For the purpose of this project, all confined spaces are considered permit required and will not be performed by Roux personnel or any personnel within Roux's oversight.

The following is a list of the safety requirements for confined space entry at the Site:

- **ROUX PERSONNEL ARE NOT AUTHORIZED TO ENTER AN OSHA PERMIT REQUIRED CONFINED SPACE;**
- Currently the scope of work **DOES NOT** require personnel to enter permitted confined space for this project; and
- Any changes to the field activities that may necessitate confined space entry will be reported to the Project Principal and OHSM.

Confined space is defined as any space, depression, or enclosure that:

- Has limited opening for entry and egress;
- Is large enough for an employee to enter and perform assigned work; and
- Is not intended for continuous occupancy.

A permit required confined space is one that meets the definition of a confined space and has one or more of the following characteristics:

- May contain or produce life-threatening atmospheres due to oxygen deficiency the presence of toxic, flammable, or corrosive contaminants;
- Contains a material that has the potential for engulfment;
- Has an internal configuration that may cause an entrant to be trapped or asphyxiated by inwardly converging walls or by a floor that slopes downward and tapers to a smaller cross-section; and
- Contains any other serious safety or health hazards.

Although Roux personnel will not perform confined space entry, it is expected that subcontractors performing cleaning and mitigation and/or remedial measures activities may be required to enter structures that are considered to be a permit required confined space. Permitting of the confined space as well as hazard mitigation for entry will be completed by the subcontractor in accordance with 1910.146.

7.11 Client and Site-Specific

In addition to the OSHA-specific procedures discussed above, there may be client and site-specific safety procedures that must be adhered to during the performance of remedial activities at the Site.

7.12 Unusual or Significant Risks

Field activities that appear to have unusual or significant risks that cannot be adequately managed with existing risk tools such as LPS, HASPs, traffic safety plans, work permits, design and O&M practices, equipment HAZOPS or other safety tools must be referred to the CHSM to help with the assessment and management of the associated potential safety risks. Examples include the use of explosives for demolition, use of firearms to control wildlife, rappelling, demolition over water, etc.

7.13 Activity-Specific

In addition to the general hazards discussed above, there are activity-specific hazards associated with each work activity planned for the Site. An activity-specific JSA has been completed for each of the activities planned for the Site. JSAs are provided in **Appendix A**. In the event that new work activities or tasks are planned, JSAs will be developed and implemented prior to performing the new activities. In the absence of

a JSA, the personnel performing work must prepare a field JSA and receive clearance from a designated competent safety official prior to performing any task with significant risk. In emergency situations where time is critical SPSAs will be utilized to identify the task, associated hazards and mitigative actions to take. For lower risk activities (as deemed by the discretion of a Competent Person) where a JSA is determined to not be needed, the individual(s) conducting the activities must perform SPSAs prior to and during the work.

8. Field Team Review

Each person performing work at or visiting this site shall sign this section after site-specific training is completed and before being permitted to access the CRZ or Exclusion Zone.

I have read and understand this Site-Specific Health and Safety Plan. I will comply with the provision contained therein.

Site/Project: 63rd Drive

Name Printed	Signature	Date

9. Approvals

By their signature, the undersigned certify that this HASP is approved and will be utilized at the Site.

TBD – Site Health and Safety Officer

Date

Levi Curnutte - Office Health and Safety Manager

Date

Rachel Miller – Project Manager

Date

Chris Proce – Project Principal

Date

Site-Specific Health and Safety Plan
94-17 63rd Drive, Flushing, New York

TABLE

1. Toxicological Properties of Hazardous Substances Present at the Site

Table 1. Toxicological, Physical, and Chemical Properties of Compounds Potentially Present at 2401 Third Avenue & 101 Lincoln Avenue,Bronx, New York

Compound	CAS #	ACGIH TLV	NIOSH REL	OSHA PEL	IDLH	Routes of Exposure	Toxic Properties	Target Organs	Physical/Chemical Properties
Acenaphthene	83-32-9	None established	None established	None established	None established	inhalation, ingestion, skin and/or eye contact	Irritation eyes, skin, respiratory system	Eyes, skin, respiratory system	Brown solid
Acenaphthylene	208-96-8	None Established	None established	None established	None established	inhalation, ingestion, skin and/or eye contact	Irritation eyes, skin, respiratory system	Eyes, skin, respiratory system	Yellow Solid Fl. Pt.=251°F
Arsenic (inorganic)	7440-38-2 (metal)	TWA 0.01 mg/m3	Ca C 0.002 mg/m3 [15-min]	TWA 0.010 mg/m3	Ca [5 mg/m3 (as As)]	Inhalation; ingestion; skin absorption; skin and/or eye contact	Ulceration of nasal septum, dermatitis, GI disturbances, peripheral neuropathy, resp irritation, hyperpigmentation of skin, [potential occupational carcinogen]	Liver, kidneys, skin, lungs, lymphatic sys	Metal: sliver-gray or tin-white, brittle, odorless solid BP: sublimes
Barium	7440-39-3	TWA 0.5 mg/m3	None established	TWA 0.5 mg/m3	None established	Inhalation, ingestion, skin contact	Irritation skin, respiratory system, digestive system	Skin, eyes, respiratory system	Yellow white powder BP: 1640 C
Benzene	71-43-2	TWA 0.5 ppm STEL 2.5 ppm	Ca TWA 0.1 ppm STEL 1 ppm	TWA 1 ppm ST 5 ppm	Ca [500 ppm]	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, skin, nose, respiratory system; dizziness; headache, nausea, staggered gait; anorexia, lassitude (weakness, exhaustion); dermatitis; bone marrow depression; [potential occupational carcinogen]	Eyes, skin, respiratory system, blood, central nervous system, bone marrow	Colorless to light yellow liquid with an aromatic odor [Note: Solid below 42 °F] BP: 176°F Fl.Pt. = 12°F LEL: 1.2% UEL: 7.8% Class B Flammable liquid
Benzo[a]anthracene	56-55-3	None established [skin cancer]	None established	None established	None established	Inhalation; ingestion; skin absorption; skin and/or eye contact	Irritation eyes, skin, respiratory system, CNS; skin cancer	Skin	Pale Yellow crystal, solid BP: 438 C
Benzo[a]pyrene	50-32-8	None established [cancer]	TWA 0.1 mg/m3	TWA 0.2 mg/m3	None established	Inhalation; ingestion; skin absorption; skin and/or eye contact	POISON. This material is an experimental carcinogen, mutagen, tumorigen, neoplastigen and teratogen. It is a probable carcinogen in humans and a known human mutagen. IARC Group 2A carcinogen. It is believed to cause bladder, skin and lung cancer. Exposure to it may damage the developing fetus. May cause reproductive damage. Skin, respiratory and eye irritant or burns.	Skin, eye, bladder, lung, reproductive	Yellow crystals or powder [found in cigarette smoke, coal tar, fuel exhaust gas and in many other sources] BP: 495 C
Benzo[b]fluoranthene	205-99-2	None established [cancer]	TWA 0.1 mg/m3	TWA 0.2 mg/m3	None established	Inhalation; ingestion; skin and/or eye contact	No data were identified on the toxicity of benzo[b]fluoranthene to humans. Based on results of studies in animals, IARC concluded that benzo[b]fluoranthene is possibly carcinogenic to humans	Respiratory system, skin, bladder, kidneys	Off-white to tan powder
Benzo[k]fluoranthene	207-08-9	None established	None established	None established	None established	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, skin, respiratory tract, gastrointestinal; fatal if swallowed, inhaled, absorbed through the skin; vomiting, nausea, diarrhea	Lungs, respiratory system	Yellow crystals BP: 480 C
Benzo(g,h,i)perylene	191-24-2	None established	None established	California permissible exposure limits for chemical contaminants (Title 8, Article 107) PEL 0.2 mg/m3	None established	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, skin, respiratory tract, very toxic to aquatic life with long lasting effects	Eyes, skin, respiratory system	Pale Yellow -Green Crystals BP: 550°C
Beryllium	7440-41-7 (metal)	TWA 0.00005 mg/m ³	Ca C 0.0005 mg/m ³	TWA 0.002 mg/m ³ C 0.005 mg/m ³ (30 minutes) with a maximum peak of 0.025 mg/m ³	Ca [4 mg/m ³ (as Be)]	inhalation, skin and/or eye contact	Berylliosis (chronic exposure): anorexia, weight loss, lassitude (weakness, exhaustion), chest pain, cough, clubbing of fingers, cyanosis, pulmonary insufficiency; irritation eyes; dermatitis; [potential occupational carcinogen]	Eyes, skin, respiratory system	Metal: A hard, brittle, gray-white solid. BP: 4532°F
Cadmium	7440-43-9 (metal)	TWA 0.01 mg/m ³	Ca	TWA 0.005 mg/m ³	Ca [9 mg/m ³ (as Cd)]	inhalation, ingestion	Pulmonary edema, dyspnea (breathing difficulty), cough, chest tightness, substernal (occurring beneath the sternum) pain; headache; chills, muscle aches; nausea, vomiting, diarrhea; anosmia (loss of the sense of smell), emphysema, proteinuria, mild anemia; [potential occupational carcinogen]	respiratory system, kidneys, prostate, blood	Metal: Silver-white, blue-tinged lustrous, odorless solid. BP: 1409°F
Carbon Tetrachloride	56-23-5	TWA 5 ppm STEL 10 ppm	Ca ST 2 ppm (12.6 mg/m3) [60 minute]	TWA 10 ppm C 25 ppm 200 ppm (5-minute maximum peak in any 4 hours)	Ca [200 ppm]	inhalation, skin absorbtion, ingestion, skin and/or eye contact	irritation eyes, skin; central nervous system depression; nausea, vomiting; liver, kidney injury; drowsiness, dizziness, incoordination; [potential occupational carcinogen]	central nervous system, eyes, lungs, liver, kidneys, skin	Colorless liquid with a characteristic ether-like odor. BP: 170°F
Carbon Monoxide	630-08-0	TWA 25 ppm	TWA 35 ppm C 200 ppm	TWA 50 ppm	1,200 ppm	inhalation	Carboxyhemogloemia	Blood	Colorless, odorless gas

Table 1. Toxicological, Physical, and Chemical Properties of Compounds Potentially Present at 2401 Third Avenue & 101 Lincoln Avenue,Bronx, New York

Compound	CAS #	ACGIH TLV	NIOSH REL	OSHA PEL	IDLH	Routes of Exposure	Toxic Properties	Target Organs	Physical/Chemical Properties
Chromium	7440-47-3	TWA 0.5 mg/m ³ (metal and Cr III compounds) TWA 0.05 mg/m ³ (water-soluble Cr VI compounds) TWA 0.01 mg/m ³ (insoluble Cr IV compounds)	TWA 0.5 mg/m ³	TWA 1 mg/m ³	250 mg/m ³ (as Cr)	inhalation, ingestion, skin and/or eye contact	Irritation eyes, skin; lung fibrosis (histologic)	Eyes, skin, respiratory system	Blue-white to steel-gray, lustrous, brittle, hard, odorless solid. BP: 4788°F
Chrysene; Phenanthrene; Pyrene; Coal tar pitch volatiles	65996-93-2	TWA 0.2 mg/m3	Ca TWA 0.1 mg/m ³ (cyclohexane-extractable fraction)	TWA 0.2 mg/m ³ (benzene-soluble fraction)	Ca [80 mg/m ³]	Inhalation, skin and/or eye contact	Dermatitis, bronchitis, [potential occupational carcinogen]	Respiratory system, skin, bladder, kidneys	Black or dark-brown amorphous residue. Combustible Solids
Coal Tar Pitch Volatiles; Chrysene; Phenanthrene; Pyrene	65996-93-2	TWA 0.2 mg/m ³	Ca TWA 0.1 mg/m ³ (cyclohexane-extractable fraction)	TWA 0.2 mg/m ³ (benzene-soluble fraction)	Ca [80 mg/m ³]	Inhalation, skin and/or eye contact	Dermatitis, bronchitis, [potential occupational carcinogen]	respiratory system, skin, bladder, kidneys	Black or dark-brown amorphous residue. Combustible Solids
1,1-Dichloroethane	75-34-3	TWA 100 ppm	TWA 100 ppm (400 mg/m ³)	TWA 100 ppm (400 mg/m ³)	3000 ppm	inhalation, ingestion, skin and/or eye contact	Irritation skin; central nervous system depression; liver, kidney, lung damage	Skin, liver, kidneys, lungs, central nervous system	Colorless, oily liquid with a chloroform-like odor. BP: 135°F Fl.P: 2°F UEL: 11.4% LEL: 5.4%
1,2-Dichloroethane (Ethylene Dichloride)	107-06-2	TWA 10 ppm	Ca TWA 1 ppm (4 mg/m ³) STEL 2 ppm (8 mg/m ³)	TWA 50 ppm C 100 ppm 200 ppm [5-minute maximum peak in any 3 hours]	Ca [50 ppm]	inhalation, ingestion, skin absorption, skin and/or eye contact	Irritation eyes, corneal opacity; central nervous system depression; nausea, vomiting; dermatitis; liver, kidney, cardiovascular system damage; [potential occupational carcinogen]	Eyes, skin, kidneys, liver, central nervous system, cardiovascular system	Colorless liquid with a pleasant, chloroform-like odor. [Note: Decomposes slowly, becomes acidic & darkens in color.] BP: 182°F Fl.P: 56°F UEL: 16% LEL: 6.2% Class IB Flammable Liquid
1,2-Dichloroethene (total)	540-59-0	TWA 200 ppm	TWA 200 ppm (790 mg/m ³)	TWA 200 ppm (790 mg/m ³)	1000 ppm	inhalation, ingestion, skin and/or eye contact	Irritation eyes, respiratory system; central nervous system depression	Eyes, respiratory system, central nervous system	Colorless liquid (usually a mixture of the cis & trans isomers) with a slightly acrid, chloroform-like odor BP: 118-140°F Fl.P: 36-39°F UEL: 12.8% LEL: 5.6% Class IB Flammable Liquid
cis-1,2-Dichloroethene	156-59-2	TWA 200 ppm	TWA 200 ppm	TWA 200 ppm	None established	inhalation, skin absorption, ingestion	Harmful if swallowed, inhaled, or absorbed through skin. Irritant. Narcotic. Suspected carcinogen	Skin	Colorless liquid BP: 60 C Fl.P: 4 C UEL: 12.8% LEL: 9.7 %
trans-1,2-Dichloroethene	156-60-5	TWA 200 ppm	None established	TWA 200 ppm STEL 250 ppm (skin)	None established	inhalation, skin absorption, ingestion, skin and/or eye contact	Narcotic. Irritation eyes, skin, respiratory tract, mucous membrane; CNS depression.	Respiratory tract, mucous membrane, eyes, skin, CNS	Colorless liquid with a fruity pleasant odor BP: 48°C Fl.P 6C UEL: 12.8% LEL: 9.7%
Dibenzo[a,h]anthracene	53-70-3	None established	None established	None established	None established	Inhalation, ingestion, skin and/or eye contact	Irritation eyes, skin	Eyes, skin; skin photosensitization.	Colorless crystalline powder BP: 524°C
Dibenzofuran	132-64-9								
Diesel Fuel #2	68476-34-6	TWA 100 mg/m ³ ; Skin notation	None established	Designated as an OSHA Select Carcinogen	None established	ingestion, skin and/or eye contact	Kidney damage; potential lung damage; suspected carcinogen; irritation of eyes, skin, respiratory tract; dizziness, headache, nausea; chemical pneumonitis (from aspiration of liquid); dry, red skin; irritant contact dermatitis; eye redness, pain.	Eyes, skin, kidneys	Clear yellow brown combustible liquid; floats on water; distinct diesel petroleum hydrocarbon odor. BP: 356-716°F Fl.P: 154.4-165.2°F LEL: 0.6% UEL: 7.0%
Ethylbenzene	100-41-4	TWA 20 ppm	TWA 100 ppm (435 mg/m ³) STEL 125 ppm (545 mg/m ³)	TWA 100 ppm (435 mg/m ³)	800 ppm [10%LEL]	inhalation, ingestion, skin and/or eye contact	Irritation eyes, skin, mucous membrane; headache; dermatitis; narcosis, coma	Eyes, skin, respiratory system, central nervous system	Colorless liquid with an aromatic odor. BP: 277°F Fl.P: 55°F UEL: 6.7% LEL: 0.8% Class IB Flammable Liquid
Fluoranthene	206-44-0	None established	None established	None established	None established	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, skin; possible burns; heart and liver injury, pulmonary edema, respiratory arrest, gastrointestinal disturbances.	Heart, liver, lungs.	Yellow needles.

Table 1. Toxicological, Physical, and Chemical Properties of Compounds Potentially Present at 2401 Third Avenue & 101 Lincoln Avenue,Bronx, New York

Compound	CAS #	ACGIH TLV	NIOSH REL	OSHA PEL	IDLH	Routes of Exposure	Toxic Properties	Target Organs	Physical/Chemical Properties
Fuel Oil #2	68476-30-2	TWA 100 mg/m3; Skin notation	None established	None established	None established	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, skin; CNS effects; nausea, vomiting, headache, cramping, dizziness, weakness, loss of coordination,, drowsiness; kidney, liver damage	Eyes, skin, CNS	Clear or yellow to red oily liquid, kerosene-like odor BP: 347 - 689 °F UEL:5-6% LEL: 0.7-1.0%
Gasoline	8006-61-9	TWA 300 ppm STEL 500 ppm	Carcinogen	None established	Ca [IDLH value has not been determined]	Skin absorption; inhalation; ingestion; skin and/or eye contact	Eyes and skin irritation, mucous membrane; dermatitis; headache; listlessness, blurred vision, dizziness, slurred speech, confusion, convulsions; chemical pneumonitis; possible liver, kidney damage [Potential occupational carcinogen]	Eyes, skin, respiratory system, CNS, Liver, Kidneys	Clear liquid with a characteristic odor, aromatic Fl.Pt. = -45°F LEL = 1.4% UEL = 7.6% Class 1B Flammable Liquid
Hydrogen Sulfide	7783-06-4	TWA 1 ppm STEL 5 ppm	C 10 ppm (15 mg/m³) [10-minute]	C 20 ppm 50 ppm [10-minute maximum peak]	100 ppm	inhalation, skin and/or eye contact	Irritation eyes, respiratory system; apnea, coma, convulsions; conjunctivitis, eye pain, lacrimation (discharge of tears), photophobia (abnormal visual intolerance to light), corneal vesiculation; dizziness, headache, lassitude (weakness, exhaustion), irritability, insomnia; gastrointestinal disturbance; liquid: frostbite	Eyes, respiratory system, central nervous system	Colorless gas with a strong odor of rotten eggs. BP: -77°F UEL: 44.0% LEL: 4.0% Flammable Gas
Indeno[1,2,3-cd]pyrene	193-39-5	None established	None established	None established	None established	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, skin; possible human carcinogen (skin); weakness; affect liver, lung tissue, renal tissue; impairment of blood forming tissue	Skin	Fluorescent green-yellow crystalline solid BP: 536 C
Lead (inorganic)	7439-92-1	TWA 0.05 mg/m³	TWA (8-hour) 0.050 mg/m³	TWA 0.050 mg/m³	100 mg/m³ (as Pb)	inhalation, ingestion, skin and/or eye contact	Lassitude (weakness, exhaustion), insomnia; facial pallor; anorexia, weight loss, malnutrition; constipation, abdominal pain, colic; anemia; gingival lead line; tremor; paralysis wrist, ankles; encephalopathy; kidney disease; irritation eyes; hypertension	Eyes, gastrointestinal tract, central nervous system, kidneys, blood, gingival tissue	A heavy, ductile, soft, gray solid. BP: 3164°F Noncombustible Solid in bulk form
Mercury (organo) alkyl compounds (as Hg)	7439-97-6	TWA 0.01 mg/m³ STEL 0.03 mg/m³ [skin]	TWA 0.01 mg/m³ STEL 0.03 mg/m³ [skin]	TWA 0.01 mg/m³ C 0.04 mg/m³	2 mg/m³ (as Hg)	inhalation, skin absorption, ingestion, skin and/or eye contact	Paresthesia; ataxia, dysarthria; vision, hearing disturbance; spasticity, jerking limbs; dizziness; salivation; lacrimation (discharge of tears); nausea, vomiting, diarrhea, constipation; skin burns; emotional disturbance; kidney injury; possible teratogenic effects	Eyes, skin, central nervous system, peripheral nervous system, kidneys	Appearance and odor vary depending upon the specific (organo) alkyl mercury compound
Mercury compounds [except (organo) alkyls] (as Hg) Mercury	7439-97-6	TWA 0.025 mg/m³ (elemental and inorganic forms)	Hg Vapor: TWA 0.05 mg/m³ [skin] Other: C 0.1 mg/m3 [skin]	TWA 0.1 mg/m³	10 mg/m³ (as Hg)	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, skin; cough, chest pain, dyspnea (breathing difficulty), bronchitis, pneumonitis; tremor, insomnia, irritability, indecision, headache, lassitude (weakness, exhaustion); stomatitis, salivation; gastrointestinal disturbance, anorexia, weight loss; proteinuria	Eyes, skin, respiratory system, central nervous system, kidneys	Metal: Silver-white, heavy, odorless liquid. [Note: "Other" Hg compounds include all inorganic & aryl Hg compounds except (organo) alkyls.] BP: 674°F
Methylene Chloride (Dichloromethane)	75-09-2	TWA 50 ppm, A3 - suspected human carcinogen	Ca	TWA 25 ppm STEL 125 ppm	Ca [2300 ppm]	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, skin; lassitude (weakness, exhaustion), drowsiness, dizziness; numbness, tingle limbs; nausea; [potential occupational carcinogen]	Eyes, skin, cardiovascular system, central nervous system	Colorless liquid with a chloroform-like odor BP: 104°F UEL: 23% LEL: 13%
Naphtha (Rubber Solvent)	8030-30-6	None established	TWA 100 ppm (400 mg/m³)	TWA 100 ppm (400 mg/m³)	1000 ppm [10%LEL]	inhalation, ingestion, skin and/or eye contact	Irritation eyes, skin, nose; dizziness, drowsiness; dermatitis; in animals: liver, kidney damage	Eyes, skin, respiratory system, central nervous system, liver, kidneys	Reddish-brown, mobile liquid with an aromatic odor BP: 320-428°F Fl.P: 100-109°F Class II Combustible Liquid
Naphthalene	91-20-3	TWA 10 ppm [skin]	TWA 10 ppm (50 mg/m³) STEL 15 ppm (75 mg/m³)	TWA 10 ppm (50 mg/m³)	250 ppm	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes; headache, confusion, excitement, malaise (vague feeling of discomfort); nausea, vomiting, abdominal pain; irritation bladder; profuse sweating; jaundice; hematuria (blood in the urine), renal shutdown; dermatitis, optical neuritis, corneal damage	Eyes, skin, blood, liver, kidneys, central nervous system	Colorless to brown solid with an odor of mothballs. BP: 424°F Fl.P: 174°F UEL: 5.9% LEL: 0.9%
Petroleum hydrocarbons(Petroleum distillates)	8002-05-9	None established	TWA 350 mg/m³ C 1800 mg/m³ [15 min]	TWA 500 ppm (2000 mg/m³)	1,100 [10% LEL]	Inhalation; ingestion; skin and/or eye contact	Irritation eyes, skin, nose, throat; dizziness, drowsiness, headache, nausea; dried/cracked skin; chemical pneumonitis	CNS, eyes, respiratory system, skin	Colorless liquid with a gasoline or kerosene-like odor BP: 86-460°F Fl. Pt = -40 to -86°F UEL: 5.9% LEL: 1.1% Flammable liquid
Polychlorinated Biphenyls (PCBs) (Chlorodiphenyl (42% Chlorine))	53469-21-9	TWA 1 mg/m³	Ca TWA 0.001 mg/m³	0.5 mg/m³	5 ppm	Dermal; inhalation; ingestion; skin and/or eye contact	Irritation eyes; chloracne; liver damage; reproductive effects; [potential occupational carcinogen]	Eyes, skin, liver, respiratory system	Colorless to light-colored, viscous liquid, hydrocarbon odor, BP: 617 - 734°F, non-flammable, LEL: NA, UEL: NA
Selenium	7782-49-2	TWA 0.2 mg/m³	TWA 0.2 mg/m³	TWA 0.2 mg/m³	1 mg/m³ (as Se)	inhalation, ingestion, skin and/or eye contact	Irritation eyes, skin, nose, throat; visual disturbance; headache; chills, fever; dyspnea (breathing difficulty), bronchitis; metallic taste, garlic breath, gastrointestinal disturbance; dermatitis; eye, skin burns; in animals: anemia; liver necrosis, cirrhosis; kidney, spleen damage	Eyes, skin, respiratory system, liver, kidneys, blood, spleen	Amorphous or crystalline, red to gray solid. [Note: Occurs as an impurity in most sulfide ores.] BP: 1265°F

Table 1. Toxicological, Physical, and Chemical Properties of Compounds Potentially Present at 2401 Third Avenue & 101 Lincoln Avenue,Bronx, New York

Compound	CAS #	ACGIH TLV	NIOSH REL	OSHA PEL	IDLH	Routes of Exposure	Toxic Properties	Target Organs	Physical/Chemical Properties
Silver	7440-22-4 (metal)	TWA 0.1 mg/m ³ (metal, dust, fume) TWA 0.01 mg/m ³ (Soluble compounds, as Ag)	TWA 0.01 mg/m ³	TWA 0.01 mg/m ³	10 mg/m ³ (as Ag)	inhalation, ingestion, skin and/or eye contact	Blue-gray eyes, nasal septum, throat, skin; irritation, ulceration skin; gastrointestinal disturbance	Nasal septum, skin, eyes	Metal: White, lustrous solid BP: 3632°F
Tetrachloroethene	127-18-4	TWA 25 ppm STEL 100 ppm listed as A3, animal carcinogen	Ca Minimize workplace exposure concentrations	TWA 100 ppm C 200 ppm (for 5 minutes in any 3-hour period), with a maximum peak of 300 ppm	Ca [150 ppm]	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, skin, nose, throat, respiratory system; nausea; flush face, neck; dizziness, incoordination; headache, drowsiness; skin erythema (skin redness); liver damage; [potential occupational carcinogen]	Eyes, skin, respiratory system, liver, kidneys, central nervous system	Colorless liquid with a mild, chloroform-like odor. BP: 250°F Noncombustible Liquid
Toluene	108-88-3	TWA 20 ppm	TWA 100 ppm (375 mg/m ³) STEL 150 ppm (560 mg/m ³)	TWA 200 ppm C 300 ppm 500 ppm (10-minute maximum peak)	500 ppm	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, nose; lassitude (weakness, exhaustion), confusion, euphoria, dizziness, headache; dilated pupils, lacrimation (discharge of tears); anxiety, muscle fatigue, insomnia; paresthesia; dermatitis; liver, kidney damage	Eyes, skin, respiratory system, central nervous system, liver, kidneys	Colorless liquid with a sweet, pungent, benzene-like odor. BP: 232°F Fl.P: 40°F UEL: 7.1% LEL: 1.1% Class IB Flammable Liquid
1,1,1-Trichloroethane (Methyl Chloroform)	71-55-6	TWA 350 ppm STEL 450 ppm	C 350 ppm (1900 mg/m ³) [15-minute]	TWA 350 ppm (1900 mg/m ³)	700 ppm	inhalation, ingestion, skin and/or eye contact	Irritation eyes, skin; headache, lassitude (weakness, exhaustion), central nervous system depression, poor equilibrium; dermatitis; cardiac arrhythmias; liver damage	Eyes, skin, central nervous system, cardiovascular system, liver	Colorless liquid with a mild, chloroform-like odor. BP: 165°F UEL: 12.5% LEL: 7.5%
Trichloroethene	79-01-6	TWA 10 ppm STEL 25 ppm	Ca	TWA 100 ppm C 200 ppm 300 ppm (5-minute maximum peak in any 2 hours)	Ca [1000 ppm]	inhalation, skin absorption, ingestion, skin and/or eye contact	Irritation eyes, skin; headache, visual disturbance, lassitude (weakness, exhaustion), dizziness, tremor, drowsiness, nausea, vomiting; dermatitis; cardiac arrhythmias, paresthesia; liver injury; [potential occupational carcinogen]	Eyes, skin, respiratory system, heart, liver, kidneys, central nervous system	Colorless liquid (unless dyed blue) with a chloroform-like odor. BP: 189°F UEL(77°F): 10.5% LEL(77°F): 8%
Vinyl Chloride	75-01-4	TWA 1 ppm	Carcinogen	TWA 1 ppm C 5 ppm [15-minute]	Ca [IDLH value has not been determined]	inhalation, skin, and/or eye contact (liquid)	Lassitude (weakness, exhaustion); abdominal pain, gastrointestinal bleeding; enlarged liver; pallor or cyanosis of extremities; liquid: frostbite; [potential occupational carcinogen]	Liver, central nervous system, blood, respiratory system, lymphatic system	Colorless gas or liquid (below 7°F) with a pleasant odor at high concentrations. BP: 7°F UEL: 33.0% LEL: 3.6% Flammable Gas
Xylene (m, o & p isomers)	108-38-3, 95-47-6, 106-42-3	TWA 100 ppm STEL 150 ppm	TWA 100 ppm (435 mg/m ³)	TWA 100 ppm (435 mg/m ³)	900 ppm	Skin absorption, inhalation, ingestion, skin, and/or eye contact	Irritation eyes, skin, nose, throat; dizziness, excitement, drowsiness, incoordination, staggering gait; corneal vacuolization; anorexia, nausea, vomiting, abdominal pain; dermatitis	Eyes, skin, respiratory system, central nervous system, gastrointestinal tract, blood, liver, kidneys	Colorless liquid with an aromatic odor BP: 282°F, 292°F, 281°F Fl. Pt. 82°F, 90°F, 81°F LEL: 1.1%, 0.9%, 1.1% UEL: 7.0%, 6.7%, 7.0% Class C Flammable Liquid
Zinc Oxide	1314-13-2	TWA 2 mg/m3 STEL 10 mg/m ³	None established	TWA 10 mg/m3 (for zinc oxide fume)	None established	skin and/or eye contact, inhalation, ingestion	Irritation eyes, skin, respiratory tract; gastrointestinal disturbances	Eyes, skin, respiratory system,	Bluish gray solid BP: 1664.6°F Flammable

References


U.S. Department of Labor. 1990. OSHA Regulated Hazardous Substances, Industrial Exposure and Control Technologies Government Institutes, Inc.
Hawley's Condensed Chemical Dictionary, Sax, N. Van Nostrand and Reinhold Company, 11th Edition, 1987.
Proctor, N.H., J.P. Hughes and M.L. Fischman, 1989. Chemical Hazards of the Workplace. Van Nostrand Reinhold. New York.
Sax, N.I. and R.J. Lewis. 1989. Dangerous Properties of Industrial Materials. 7th Edition. Van Nostrand Reinhold. New York.
2017 TLVs® and BEIs®, American Conference of Industrial Hygienists

Abbreviations:


ACGIH – American Conference of Governmental Industrial Hygienists.
BP – boiling point at 1 atmosphere. °F
C – Ceiling, is a concentration that should not be exceeded during and part of the working exposure.
CAS# - Chemical Abstracts Service registry number which is unique for each chemical.
Ft Pt. – Flash point
IDLH - Immediately Dangerous to Life and Health concentrations represent the maximum concentration from which, in the event of respirator failure, one could escape within 30 minutes without a respirator and without experiencing any escape-impairing or irreversible health effects.
LEL – Lower explosive (flammable) limit in air, % by volume (at room temperature)
mg/m³ – Milligrams of substance per cubic meter of air
NIOSH - National Institute for Occupational Safety and Health.
OSHA – Occupational Safety and Health Administration
PEL - OSHA Permissible Exposure Limit (usually) a time weighted average concentration that must not be exceeded during any 8 hour work shift of a 40 hr work week.
ppm – parts per million
REL – NIOSH Recommended Limit indicated a time weighted average concentration that must not be exceeded during any 10 hour work shift of a 40 hr work week
SG - Specific Gravity
STEL – Short-term exposure limit (ST)
TLV - ACGIH Threshold Limit Values (usually 8 hour time weighted average concentrations).
TWA – 8-hour, time-weighted average
UEL – Upper explosive (flammable) limit in air, % by volume (at room temperature)
VP - Vapor Pressure

FIGURES

1. Site Location Map
2. Site Plan
3. Route to Hospital and Urgent Care Facility

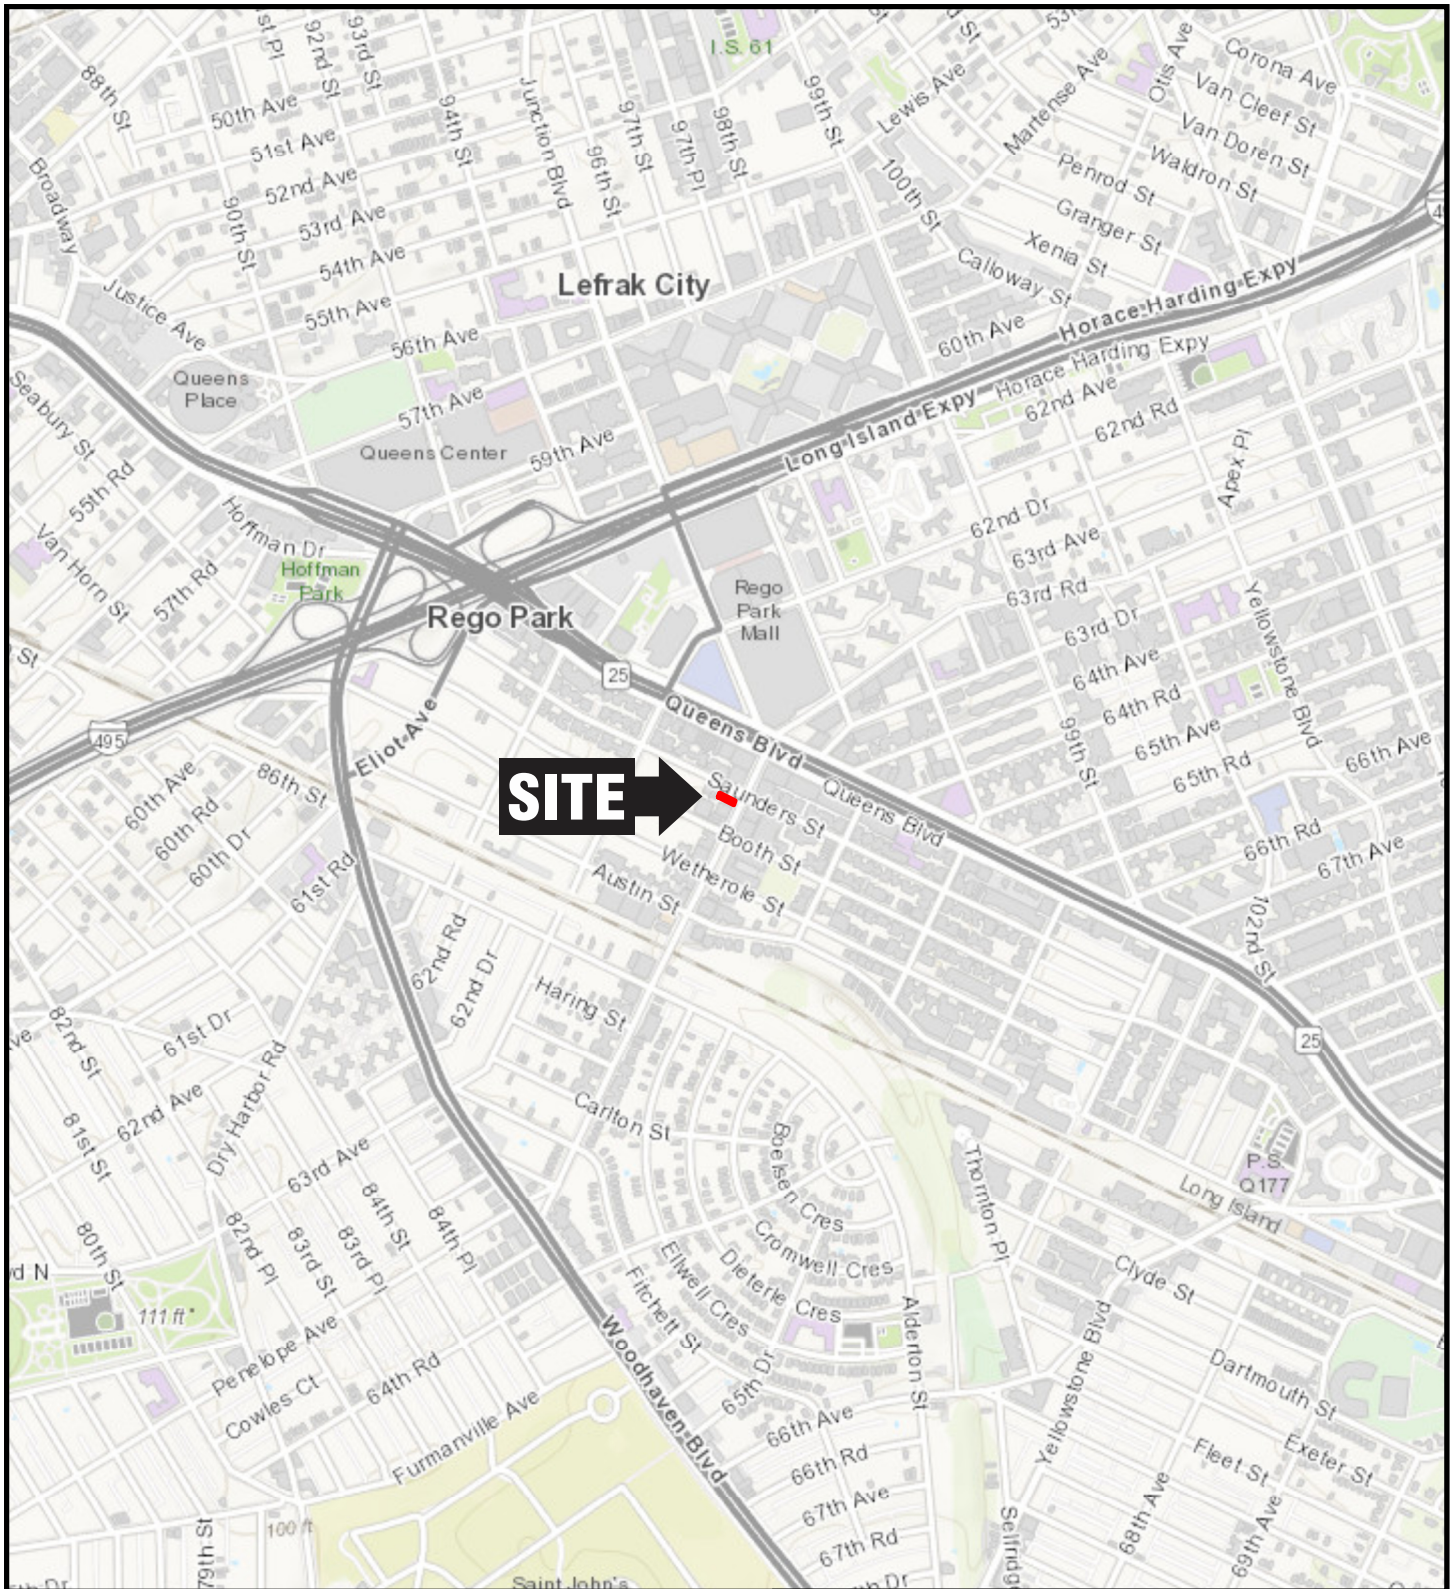

QUADRANGLE LOCATION



Title:

SITE LOCATION MAP

94-17 63RD DRIVE
REGO PARK, NEW YORK

Prepared for:

ARBERN QUEENS COMMERCIAL PROPERTIES LLC

ROUX

Compiled by: R.L.

Date: 06/21/19

FIGURE

Prepared by: M.S.R.

Scale: AS SHOWN

Project Mgr: R.L.


Project: 3316.0001Y000


File: 3316.0001Y102.1.mxd

1



LEGEND

 EMERGENCY MUSTER AREA

 SITE BOUNDARY


Title:


**SITE PLAN WITH
EMERGENCY MUSTER AREA**

94-17 63RD DRIVE
REGO PARK, NEW YORK

Prepared for:

ARBERN QUEENS COMMERCIAL PROPERTIES LLC

	Compiled by: R.L.	Date: 06/21/19	FIGURE 2
	Prepared by: M.S.R.	Scale: AS SHOWN	
	Project Mgr: R.L.	Project: 3316.0001Y000	
	File: 3316.0001Y102.2.mxd		

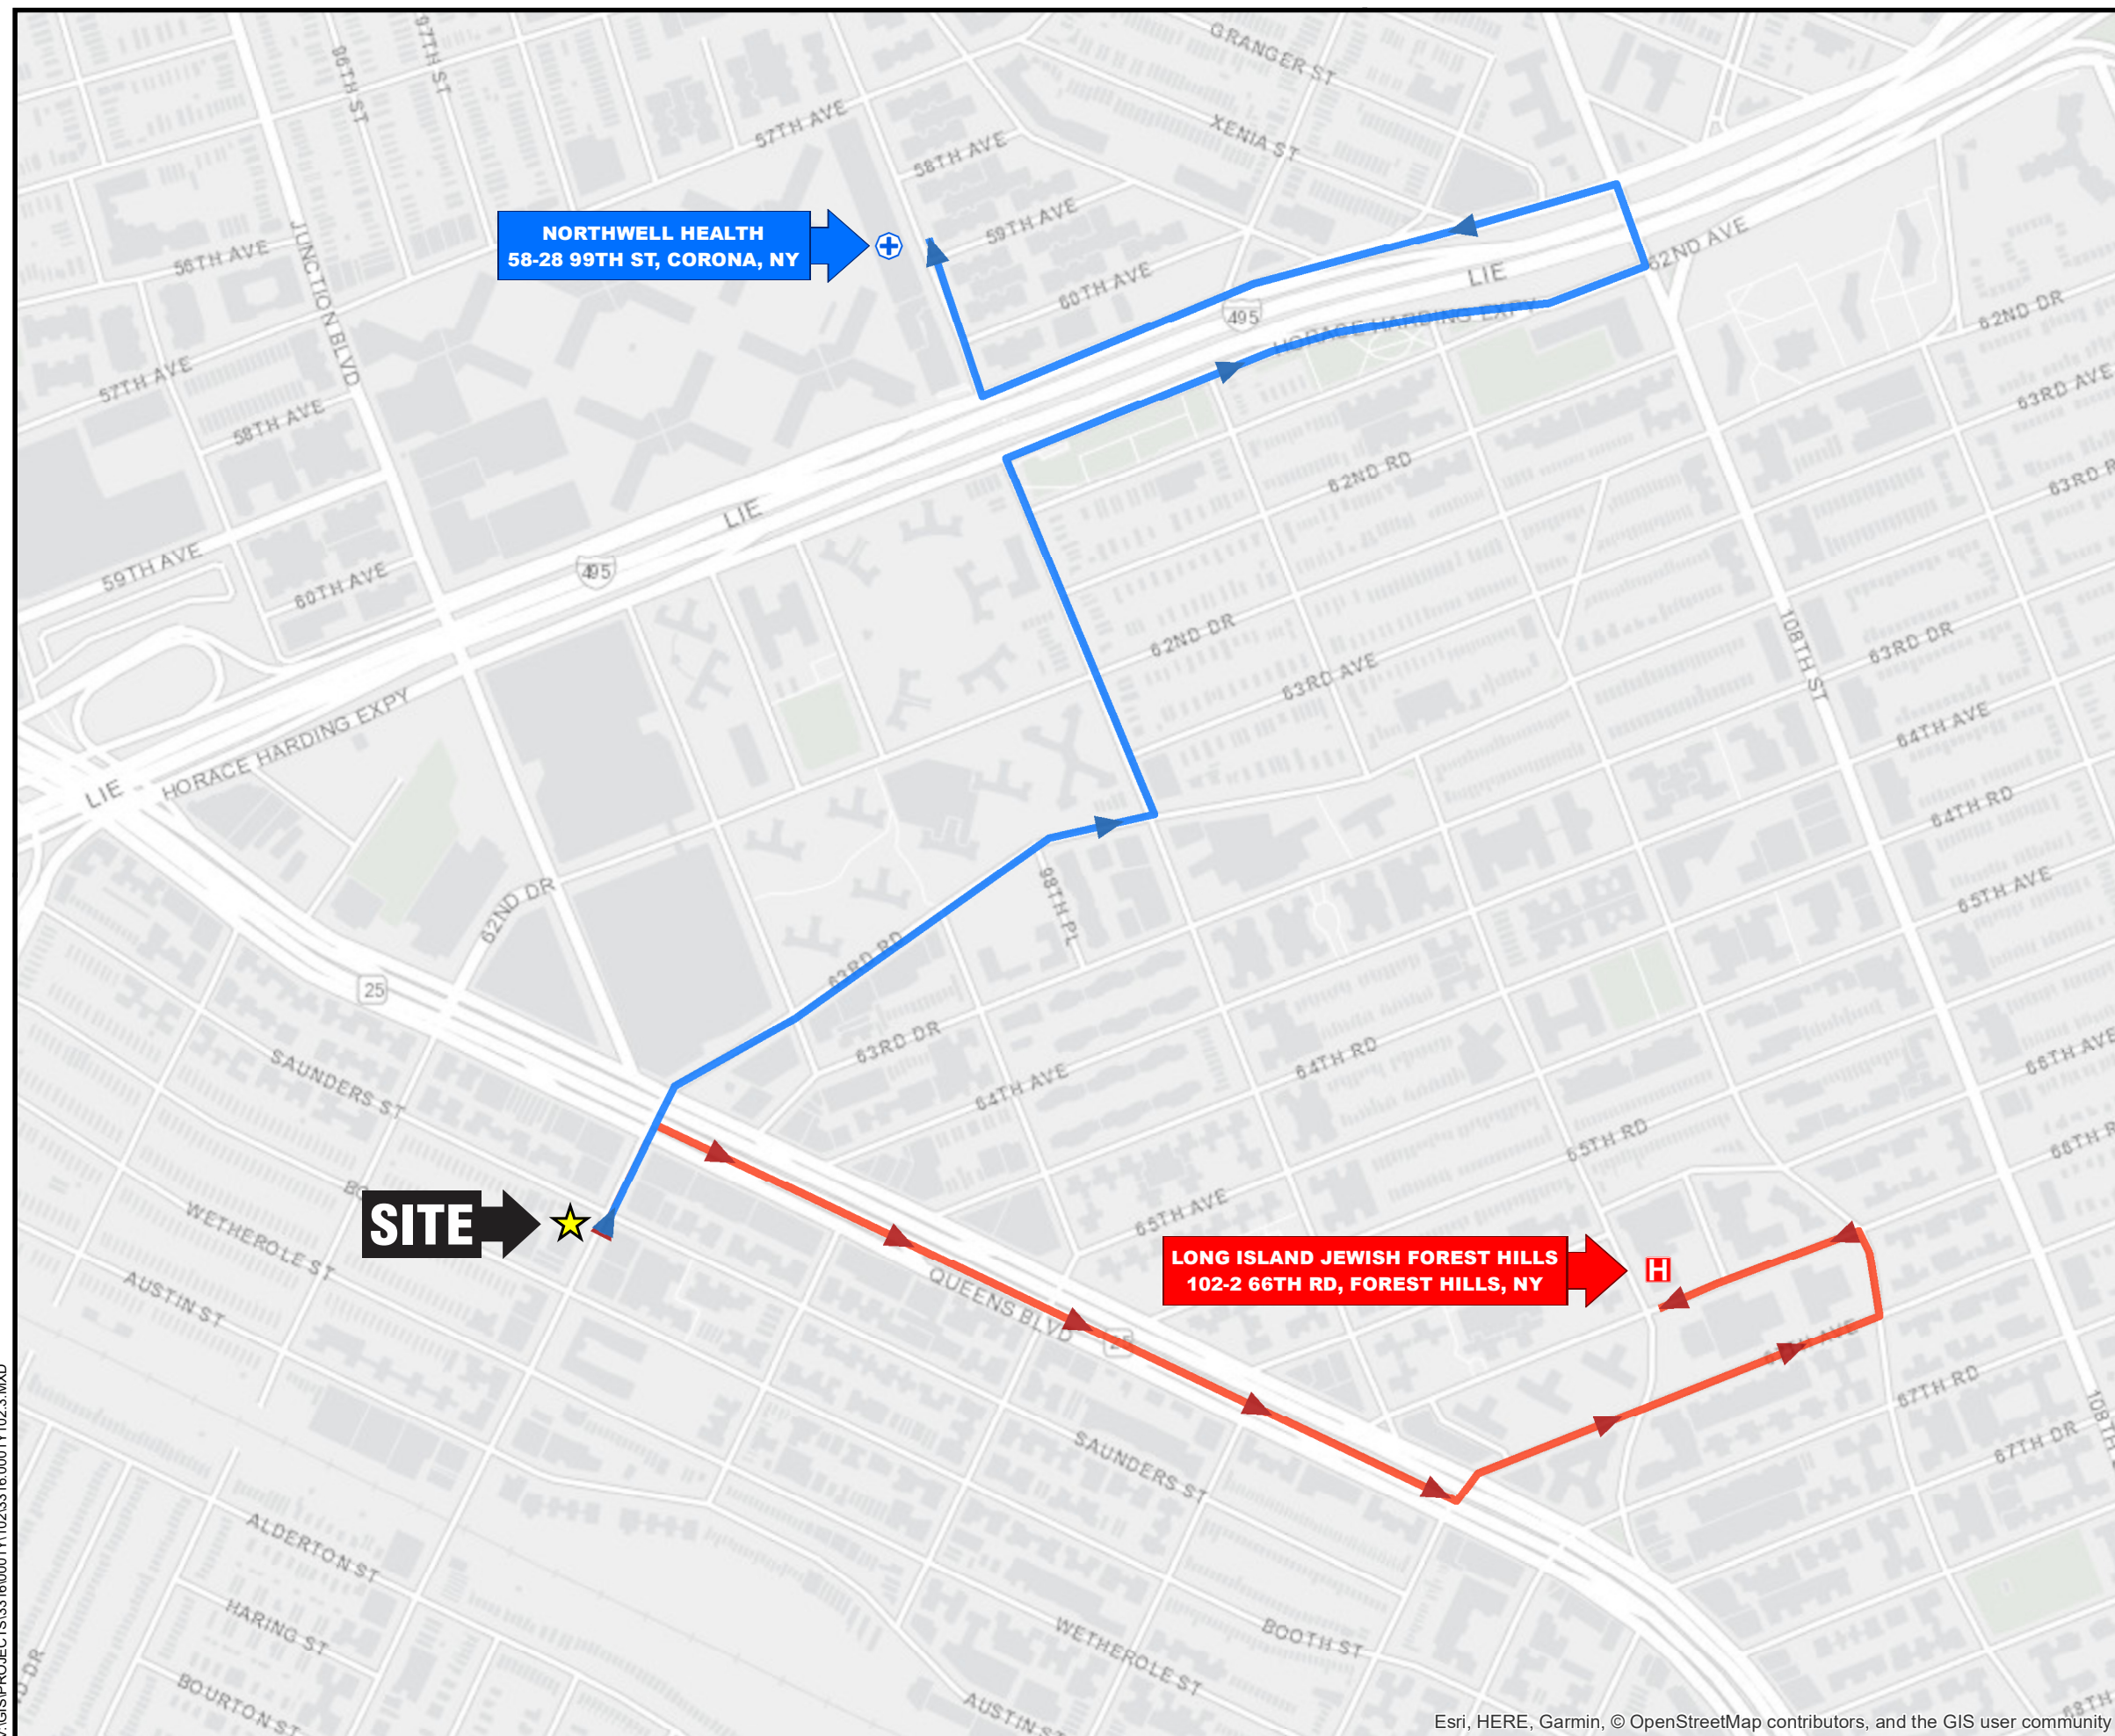

APPENDICES

- A. Job Safety Analysis (JSA) Forms
- B. SDSs for Chemicals Used
- C. Incident Investigation and Reporting Program
- D. Heavy Equipment Exclusion Zone Policy
- E. Subsurface Utility Clearance Management Program
- F. Personal Protective Equipment Management Program
- G. Generic Community Air Monitoring Plan (CAMP)
- H. Health and Safety Meeting/Daily Meeting Log

APPENDIX A

Job Safety Analysis (JSA) Forms

JOB SAFETY ANALYSIS		Ctrl. No. GEN-006	DATE 8/6/2018	<input type="checkbox"/> NEW <input checked="" type="checkbox"/> REVISED	PAGE 1 of 2
JSA TYPE CATEGORY: Generic		WORK TYPE: Drilling	WORK ACTIVITY (Description): Direct Push Soil Borings / Well Installation		
DEVELOPMENT TEAM	POSITION / TITLE	REVIEWED BY:	POSITION / TITLE		
Timothy Zei	Project Hydrogeologist	Raymond Olson	Staff Assistant Geologist		
		Christine Pietrzyk	Office Health & Safety Manager		
		Brian Hobbs	Corporate Health & Safety Manager		
REQUIRED AND / OR RECOMMENDED PERSONAL PROTECTIVE EQUIPMENT					
<input type="checkbox"/> LIFE VEST <input checked="" type="checkbox"/> HARD HAT <input type="checkbox"/> LIFELINE / BODY HARNESS <input checked="" type="checkbox"/> SAFETY GLASSES	<input type="checkbox"/> GOGGLES <input type="checkbox"/> FACE SHIELD <input checked="" type="checkbox"/> HEARING PROTECTION: (as needed) <input checked="" type="checkbox"/> SAFETY SHOES: <u>Composite-toe or steel toe boots</u>	<input type="checkbox"/> AIR PURIFYING RESPIRATOR <input type="checkbox"/> SUPPLIED RESPIRATOR <input checked="" type="checkbox"/> PPE CLOTHING: <u>Fluorescent reflective vest or high visibility clothing, Long Sleeve Shirt</u>	<input checked="" type="checkbox"/> GLOVES: <u>Leather, Nitrile and cut resistant</u> <input checked="" type="checkbox"/> OTHER: <u>Insect Repellent, sunscreen (as needed)</u>		
REQUIRED AND / OR RECOMMENDED EQUIPMENT					
Geoprobe or Truck-Mounted Direct Push Drill Rig, Hand Tools, Photoionization Detector, Multi-Gas Meter (or equivalent), Macrocore liners, Liner Opening Tool, 20 lb. Type ABC Fire Extinguisher, 42" Cones & Flags, "Work Area" Signs, Water					
COMMITMENT TO SAFETY- All personnel onsite will actively participate in hazard recognition and mitigation throughout the day by verbalizing SPSAs					
EXCLUSION ZONE (EZ) – All non-essential personnel will maintain a distance of 10 feet from drilling equipment while equipment is moving/engaged					
"SHOW ME YOUR HANDS"					
Driller and helper should show that hands are clear from controls and moving parts					
Assess 1JOB STEPS	Analyze 2POTENTIAL HAZARDS	Act 3CRITICAL ACTIONS			
1. Mobilization of drilling rig (ensure the Subsurface Clearance Protocol and Drill Rig Checklist are completed)	1a. CONTACT: Equipment/property damage. 1b. FALL: Slip/trip/fall hazards. 1c. CONTACT: Crushing from roll-over.	1a. The drill rig's tower/derrick will be lowered and secured prior to mobilization. 1a. A spotter should be utilized while moving the drill rig. If personnel move into the path of the drill rig, the drill rig will be stopped until the path is again clear. Use a spotter for all required backing operations. 1a. Set-up the work area and position equipment in a manner that eliminates or reduces the need for backing of support trucks and trailers. 1a. When backing up truck rig with an attached trailer use a second spotter if there is tight clearance simultaneously on multiple sides of the equipment or if turning angles limit driver visibility. 1a. Inspect the driving path for uneven terrain. Level or avoid if needed. 1a. Drill rig should have a minimum exclusion zone of 10 feet for non-essential personnel (i.e., driller helper, geologist) when the rig is moving/ in operation. 1b. Inspect walking path for uneven terrain, weather-related hazards (i.e., ice, puddles, snow, etc.), and obstructions prior to mobilizing equipment. 1b. Do not climb over stored materials/equipment; walk around. Practice good housekeeping. 1b. Use established pathways and walk on stable, secure ground. 1c Geoprobe should cross all hills/obstructions head on with the mast down to reduce risk of roll-over.			
2. Raising tower/derrick of drill rig	2a. CONTACT: Overhead hazards. 2b. CONTACT: Pinch Points/Amputation Points when raising the rig and instability of rig	2a. Prior to raising the tower/derrick, the area above the drilling rig will be inspected for wires, tree limbs, piping, or other structures, that could come in contact with the rig's tower and/or drilling rods or tools. 2a. Maintain a safe distance of 10' from overhead structures. 2b. Inspect the equipment prior to use and avoid pinch/amputation points. 2b. Lower outriggers to ensure stability prior to raising rig tower/derrick. 2b. If the rig needs to be mounted, be sure to use three points of contact.			
3. Advancement of drilling equipment and well installation	3a. CONTACT: Flying debris 3b. EXPOSURE: Noise and dust.	3a. Be aware of and avoid potential lines of fire and wear required PPE such as eye, ear, and hand protection. 3b. Wet borehole area with sprayer to minimize dust. 3b. Stand upwind and keep body away from rig. 3b. Dust mask should be worn if conditions warrant. 3b. Wear hearing protection when the drill rig is in operation.			

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object; Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy Source - electricity, pressure, compression/tension.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

Assess 1JOB STEPS	Analyze 2POTENTIAL HAZARDS	Act 3CRITICAL ACTIONS
3. Advancement of drilling equipment and well installation (Continued)	<p>3a. CONTACT: Flying debris</p> <p>3b. EXPOSURE: Noise and dust.</p> <p>3c. FALL: Slip/trip/fall hazards.</p> <p>3d. CAUGHT: Limb/extremity pinching; abrasion/crushing.</p> <p>3e. CONTACT: Equipment imbalance during advancement of drill equipment.</p> <p>3f. EXPOSURE: Inhalation of contamination/vapors.</p> <p>3g. EXERTION: Potential for muscle strain/injury while lifting and installing well casings, lifting sand bags, and/or lifting rods.</p>	<p>3c. Contain drill cuttings and drilling water to prevent fall hazards from developing in work area.</p> <p>3c. See 1b.</p> <p>3d. Ensure all Emergency Safety Stop buttons function properly.</p> <p>3d. Always wear leather gloves when making connections and using hand tools; wear cut-resistant (i.e., Kevlar) gloves when handling cutting tools.</p> <p>3d. Inspect the equipment prior to use for potential pinch/amputation points. Keep hands away from pinch/amputation points and use of tools is preferable compared to fingers and hands.</p> <p>3d. Inspect drill head for worn surface or missing teeth; replace if damaged or blunt.</p> <p>3d. Ensure all jewelry is removed, loose clothing is secured, and PPE is secured close to the body.</p> <p>3d. All non-essential personnel should stay away from the immediate work area; position body out of the line-of-fire of equipment.</p> <p>3d. Drillers and helpers will understand and use the "Show Me Your Hands" Policy.</p> <p>3d. Spinning rods/casing have an exclusion zone of 10 feet while in operation.</p> <p>3e. Drillers will advance the borehole with caution to avoid causing the rig to become imbalanced and/or tip.</p> <p>3e. The blocking and leveling devices used to secure the rig will be inspected by drillers and Roux personnel regularly to see if shifting has occurred.</p> <p>3e. In addition, personnel and equipment that are non-essential to the advancement of the borehole will be positioned away from the rig at a distance that is at least as far as the boom is high (minimum exclusion zone of 10 feet).</p> <p>3f. Monitor ambient air for dangerous conditions using a calibrated photoionization detector (PID) to periodically monitor the breathing zone of the work area.</p> <p>3f. If a reading of >5ppm is recorded, the Roux field personnel must temporarily cease work, instruct all Site personnel to step away from the area of elevated readings and inform the Roux PM of the condition. The Roux PM will then recommend additional precautions in accordance with the site specific health and safety plan.</p> <p>3f. Use a multi-gas meter to monitor ambient air for dangerous conditions (i.e. unsafe levels of carbon monoxide when drilling indoors or the presence of explosive vapors).</p> <p>3g. Keep back straight and bend at the knees.</p> <p>3g. Utilize team lifting for objects over 50lbs.</p> <p>3g. Use mechanical lifting device for odd shaped objects.</p>
4. Remove sample liner.	<p>4a. EXERTION: Potential for muscle strain/injury while removing liner from probe rod.</p> <p>4b. CONTACT: Pinch points and cuts</p> <p>4c. EXPOSURE: Inhalation and/or dermal contact with contaminants.</p>	<p>4a. Utilize team lifting for objects over 50lbs.</p> <p>4a. Use hydraulic liner extruder if available.</p> <p>4b. Place liner on sturdy surface when opening.</p> <p>4b. Don cut-resistant gloves and use appropriate liner cutter when opening liners.</p> <p>4b. Always cut away from the body.</p> <p>4c. Wear chemical-resistant disposable gloves when handling liners.</p> <p>4c. See 3e.</p>
5. Decontaminate equipment.	<p>5a. EXPOSURE/CONTACT: To contamination (e.g., Separate Phase Hydrocarbons (SPH), contaminated groundwater, vapors).</p> <p>5b. EXPOSURE: To chemicals in cleaning solution including ammonia.</p>	<p>5a. Wear chemical-resistant disposable gloves and safety glasses.</p> <p>5a. Contain decontamination water so that it does not spill.</p> <p>5a. Use an absorbent pad to clean spills, if necessary.</p> <p>5a. Spray equipment from side angle, not straight on, to avoid backsplash.</p> <p>5a. See 3b.</p> <p>5b. See 4a. Review SDS to ensure appropriate precautions are taken and understood.</p>

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object; Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy Source - electricity, pressure, compression/tension.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

JOB SAFETY ANALYSIS		Ctrl. No. GEN-011	DATE: 8/6/2018	<input type="checkbox"/> NEW <input checked="" type="checkbox"/> REVISED	PAGE 1 of 2
JSA TYPE CATEGORY Generic		WORK TYPE Construction - Excavation		WORK ACTIVITY (Description) Excavation / Trenching	
DEVELOPMENT TEAM		POSITION / TITLE		REVIEWED BY:	
David Kaiser		Senior Engineer		Brian Hobbs	
Ian Holst		Senior Engineer			
REQUIRED AND / OR RECOMMENDED PERSONAL PROTECTIVE EQUIPMENT					
<input type="checkbox"/> LIFE VEST <input checked="" type="checkbox"/> HARD HAT <input checked="" type="checkbox"/> LONG SLEEVED SHIRT <input type="checkbox"/> LIFELINE / BODY HARNESS <input checked="" type="checkbox"/> SAFETY GLASSES		<input type="checkbox"/> GOGGLES <input type="checkbox"/> FACE SHIELD <input checked="" type="checkbox"/> HEARING PROTECTION <input checked="" type="checkbox"/> SAFETY SHOES: <u>Steel-toe boots</u>		<input type="checkbox"/> AIR PURIFYING RESPIRATOR <input type="checkbox"/> SUPPLIED RESPIRATOR <input checked="" type="checkbox"/> PPE CLOTHING: <u>Fluorescent reflective vest or high visibility long sleeved clothing</u> <input checked="" type="checkbox"/> GLOVES: <u>Leather or cut resistant</u> <input type="checkbox"/> OTHER	
REQUIRED AND / OR RECOMMENDED EQUIPMENT					
Jackhammer, Excavator, Backhoe, Hand Tools, Photoionization Detector, barrels, 42" traffic cones, snow fencing, telescoping poles, temporary chain link fence, ladders, shovels, digging bars, power tools (cut-off saw), Two-way radios, Sheeting, Trench box, Retractable lanyard, Harness					
COMMITMENT TO SAFETY - All personnel onsite will actively participate in hazard recognition and mitigation throughout the day by verbalizing SPSAs					
EXCLUSION ZONE (EZ): A 10-foot exclusion zone will be maintained around equipment in motion and outside the swing/tip radius.					
Assess 1JOB STEPS		Analyze 2POTENTIAL HAZARDS		Act 3CRITICAL ACTIONS	
1. Pre-Clearance Protocol.		1a. CONTACT: Damage to underground utility. 1b. ENERGY SOURCE/CONTACT: Property damage; Pressurized water mains may cause lacerations or broken bones. Pressurized gas mains may explode causing serious injury, or death. Underground electric may cause severe burns, shock, or death. 1c. FALL: Slip, Trip or Fall may cause muscle strains or tears, abrasions, lacerations, or broken bones.		1a. Confirm that (if applicable) "Call Before You Dig" and local utility companies were contacted prior to trenching in order to confirm utility mark outs. Must have a case # before digging. 1b. Pre-clearing of the trenching location must be conducted to a minimum of 5 vertical feet below the ground surface (10 feet minimum for Critical Zone) using hand tools (shovel and non-metallic dig bar) prior to trenching. Supervisor should be contacted to discuss appropriate pre-clearing depth. Complete subsurface clearance checklist. 1c. Be aware of the conditions when walking or loading equipment and working. Walk within established pathway avoiding uneven surfaces. Remove potential slip/trip/fall hazards.	
2. Set up work zone.		2a. CONTACT/CAUGHT: Cuts/lacerations from equipment. Broken bones from contact by vehicle. 2b. FALL: Slip, Trip or Fall may cause muscle strains or tears, abrasions, lacerations, or broken bones.		2a. Isolate work area from hazards with cones, barricades, and snow fencing, telescoping poles or temporary chain link fence. Utilize a flag person when necessary (i.e., third party traffic in area). Install traffic signs in roadways and for detours. Spotters will maintain and enforce exclusion zone. 2b. See 1c.	

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object;

Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards, energy source; Energy Source - electricity, pressure, compression/tension.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

Assess ¹ JOB STEPS	Analyze ² POTENTIAL HAZARDS	Act ³ CRITICAL ACTIONS
3. Trenching Activity.	<p>3a. CONTACT: Serious injury including broken bones, muscle strains or tears, and possibly death due to contact with machine.</p> <p>3b. FALL: Slip, Trip or Fall may cause muscle strains or tears, abrasions, lacerations, or broken bones</p> <p>3c. EXPOSURE: Noise, Dust, Concrete- Asphalt, petroleum hydrocarbon vapors may cause damage to ears and lungs</p>	<p>3a. Spotter(s) required for all heavy equipment operation. No worker shall be allowed inside the exclusion zone or along the trench/excavation area while any equipment is in operation. A minimum exclusion zone greater than the length of the equipment boom must be established. Workers only allowed in exclusion zone if the operator is in "Hands Off "mode. Operator will not operate equipment until worker is out of exclusion zone. Spotters and operators will have radios for communication, when either loses sight of one another, and/or in case of emergency.</p> <p>3b. Any trench/excavation deeper than 3' must have a ladder within 25' of any worker in the excavation. At least 3'(rungs) of the ladder shall be above the top of the excavation. All spoil piles shall be maintained 2' minimum from edge of excavation.</p> <p>3b. Any trench/excavation deeper than 6' must have fall protection, retractable lanyard for ladder use, and 42" high guardrails along the edge of the trench/excavation.</p> <p>3c. Air monitoring using a calibrated photoionization detector (PID) will be used to monitor the breathing zone of the work area. If a reading of >5ppm is recorded, the oversight personnel must temporarily cease work and instruct all Site personnel to step away from the area of elevated readings.</p>
4. Setting Trench protections if necessary.	<p>4a. CAUGHT: Injury due to contact with failed trench, may include muscle strains or tears, abrasions or lacerations, broken bones and possibly death.</p> <p>4b. CONTACT/CAUGHT: Injury due to rigging activities and entering exclusion zone during lifting and/or transport of shoring/trench box/material may include muscle strains or tears, abrasions or lacerations, broken bones and possibly death.</p> <p>4c. FALL: Possible injury due to fall into excavation may include muscle strains or tears, abrasions or lacerations, or broken bones.</p>	<p>4a. To prevent cave-ins and avoid caught by/between, excavations over 4' in depth, unless working in stable rock, shall have engineer approved shoring, sheeting or trench box. Top of protection shall be at least 2' above top of excavation.</p> <p>4b. Use only inspected rigging with 2, 3 or 4 lift points; wear cut-resistant gloves. Rigging to be hooked up to factory installed hook up points on equipment. Control load with non-conductive tag lines with workers out of exclusion zone. Don't stand underneath suspended load; wear steel toed boots and hard hat.</p> <p>4c. Shoring to be set and sides will be backfilled to avoid fall hazards before workers are allowed to enter area. Operator will be in "HANDS OFF" mode before workers enter work area to unhook rigging. An inspected ladder extending 3' above top of the shoring will be used to enter and exit the shoring. Workers will use three points of contact when using the ladder.</p>
5. Secure/Leave Site. If backfilling, see excavation backfilling and compaction JSA for potential hazards and critical actions.	<p>5a. FALL: Potential Slip, Trip or Fall - may cause muscle strains or tears, abrasions or lacerations, or broken bones.</p>	<p>5a. See 1c.</p> <p>5a. All open excavations must be backfilled or secured prior to departure with steel plates, orange construction fence or temporary chain link fencing.</p>

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object;

Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy source – electricity, pressure, compression/tension.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

JOB SAFETY ANALYSIS		Ctrl. No. GEN-015	DATE: 8/6/2018	<input type="checkbox"/> NEW <input checked="" type="checkbox"/> REVISED	PAGE 1 of 2
JSA TYPE CATEGORY GENERIC		WORK TYPE Site Recon		WORK ACTIVITY (Description) Mobilization/Demobilization	
DEVELOPMENT TEAM		POSITION / TITLE		REVIEWED BY:	
Rebecca Lowy		Staff Assistant Geologist		Brian Hobbs	
Tally Sodre		OHSM		Corporate Health & Safety Manager	
REQUIRED AND / OR RECOMMENDED PERSONAL PROTECTIVE EQUIPMENT					
<input type="checkbox"/> LIFE VEST <input checked="" type="checkbox"/> HARD HAT <input type="checkbox"/> LIFELINE / BODY HARNESS <input checked="" type="checkbox"/> SAFETY GLASSES		<input type="checkbox"/> GOGGLES <input type="checkbox"/> FACE SHIELD <input checked="" type="checkbox"/> HEARING PROTECTION (as needed) <input checked="" type="checkbox"/> SAFETY SHOES: <u>Steel Toe or composite toe</u>		<input type="checkbox"/> AIR PURIFYING RESPIRATOR <input type="checkbox"/> SUPPLIED RESPIRATOR <input checked="" type="checkbox"/> PPE CLOTHING: <u>Fluorescent reflective vest of high-visibility clothing; long sleeve shirt; long pants</u> <input checked="" type="checkbox"/> GLOVES: <u>Leather, nitrile, and cut resistant (as needed)</u> <input type="checkbox"/> OTHER	
REQUIRED AND / OR RECOMMENDED EQUIPMENT					
Required Equipment: Varies					
COMMITMENT TO SAFETY- All personnel onsite will actively participate in hazard recognition and mitigation throughout the day by verbalizing SPSAs					
EXCLUSION ZONE (EZ): A 10-foot exclusion zone will be maintained around equipment in use..					
Assess 1JOB STEPS		Analyze 2POTENTIAL HAZARDS		Act 3CRITICAL ACTIONS	
1. Mobilize/demobilize and establish work area		1a. FALL: Slip/trips/falls from obstructions, uneven terrain, weather conditions, heavy loads, and/or poor housekeeping. 1b. CONTACT: Personal injury and/or property damage caused by being struck by Site traffic or equipment used in Site activities.		1a. Use 3 points-of-contact/ensure secure footing when entering and exiting vehicle. 1a. Inspect walking path for uneven terrain, steep hills, obstructions, and/or weather-related hazards (i.e., ice, snow, and puddles) prior to mobilizing equipment. Use established pathways. Walk on stable/secure ground. 1a. Do not climb over stored materials/equipment; walk around. Practice good housekeeping; organize and store equipment neatly in one area at its lowest potential energy. 1a. Wear boots with adequate treads. 1a. Delineate unsafe areas with 42" cones, caution tape and/or flagging. 1b. Observe and maintain the posted speed limits. 1b. When first arriving onsite, park vehicles in designated parking space and/or out of the way locations. Use parking brake on all vehicles and tire chocks on work trucks and trailers. 1b. Check in with Site Manager/Supervisor to ensure coordination with other Site activities and to discuss any special hazards. Ensure that short-service employees (SSE) are identified. 1b. Identify potential traffic sources. 1b. Wear PPE including high visibility clothing or reflective vest. 1b. Use a spotter while moving work vehicles; plan ahead to avoid backing whenever possible. 1b. Maintain a minimum 10' exclusion zone when vehicles are in motion. When backing up truck rig with an attached trailer use a second spotter if there is tight clearance simultaneously on multiple sides of the equipment or if turning angles limit driver-to-spotter visibility. 1b. Delineate work area with 42" cones, flags, caution tape, and/or other barriers. 1b. Position "Work Area" signs at Site entrances, if possible, or at either side of work area.	

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object; Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy Source - electricity, pressure, compression/tension.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift." Avoid general statements such as, "be careful."

Assess ¹ JOB STEPS	Analyze ² POTENTIAL HAZARDS	Act ³ CRITICAL ACTIONS
	<p>1c. CAUGHT: Personal injury from pinch points and being in line-of-fire of vehicle and/or equipment.</p> <p>1d. OVEREXERTION: Muscle strains while lifting/carrying equipment.</p> <p>1e. EXPOSURE: Personal injury from exposure to biological and environmental hazards.</p> <p>1f. EXPOSURE: Weather related injuries.</p> <p>1g. EXPOSURE: Personal injury from noise hazards.</p>	<p>1b. Position largest vehicle to protect against oncoming traffic.</p> <p>1b. Face traffic, maintain eye contact with oncoming vehicles, use a spotter, and establish a safe exit route.</p> <p>1b. Observe potential overhead and ground surface features that may interfere with moving equipment. Clear the path of physical hazards prior to initiating mobilization.</p> <p>1c. Make sure driver has engaged parking brake and placed wheel chocks in a position to prevent movement. Be sure that vehicle is parked in front/down gradient (positioned to best block oncoming traffic) of work area.</p> <p>1c. Wear leather gloves when handling any tools or equipment. Wear cut-resistant gloves (Kevlar or similar) when handling sharp objects/cutting tools/glass.</p> <p>1c. Keep body parts away from line-of-fire of equipment.</p> <p>1c. Always carry tools by the handles and/or designated carrier. Ensure sharp-edged tools are sheathed/secure.</p> <p>1c. Remove any loose jewelry. Avoid wearing loose clothing and/or ensure loose clothing is secure.</p> <p>1c. Secure all items on the equipment, tighten up any items or features that have potential to shift or break during mobilization.</p> <p>1d. Use body positioning and lifting techniques that avoid muscle strain; keep back straight, lift with legs, turn with whole body, keep load close to body, and never reach with a load.</p> <p>1d. Ensure that loads are balanced. Use assistance (mechanical or additional person) to carry equipment that is either unwieldy or over 50 lbs.</p> <p>1e. Inspect area to avoid contact with biological hazards (i.e. poisonous plants, stinging insects, ticks, etc.).</p> <p>1e. Wear long sleeved clothes treated with Permethrin, apply insect repellent containing DEET to exposed skin, and inspect clothes and skin for ticks during and after work.</p> <p>1e. Apply sunscreen (SPF 15+) if exposure to sun for 30 minutes or more is expected.</p> <p>1f. Watch for heat stress symptoms (muscle cramping, exhaustion, dizziness, nausea, rapid and shallow breathing). Take breaks in cool places and hydrate as needed.</p> <p>1f. Watch for cold stress symptoms (severe shivering, slowing of body movement, weakness, stumbling or inability to walk, collapse). Take breaks in warm areas as needed.</p> <p>1f. Wear clothing appropriate for weather and temperature conditions (e.g., rain jackets, snow pants, multiple layers).</p> <p>1f. If lightning is observed, wait 30 minutes in a sheltered location (car is acceptable) before resuming work.</p> <p>1g. Wear hearing protection if sound levels exceed 85 dBA (if you must raise your voice for normal conversation).</p>

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object;

Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy Source – electricity, pressure, compression/tension.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

JOB SAFETY ANALYSIS		Ctrl. No. GEN-019	DATE: 8/6/2018	<input type="checkbox"/> NEW <input checked="" type="checkbox"/> REVISED	PAGE 1 of 2
JSA TYPE CATEGORY GENERIC		WORK TYPE Site Recon		WORK ACTIVITY (Description) Site Walk and Inspection	
DEVELOPMENT TEAM		POSITION / TITLE		REVIEWED BY:	
Sara Barrientos		Staff Geologist		Brian Hobbs	
				Joe Duminuco	
				Vice President	
REQUIRED AND / OR RECOMMENDED PERSONAL PROTECTIVE EQUIPMENT					
<input type="checkbox"/> LIFE VEST <input checked="" type="checkbox"/> HARD HAT <input type="checkbox"/> LIFELINE / BODY HARNESS <input checked="" type="checkbox"/> SAFETY GLASSES		<input type="checkbox"/> GOGGLES <input type="checkbox"/> FACE SHIELD <input checked="" type="checkbox"/> HEARING PROTECTION: ear plugs as necessary <input checked="" type="checkbox"/> SAFETY SHOES: <u>Steel or</u> <u>composite toed</u>		<input type="checkbox"/> AIR PURIFYING RESPIRATOR <input type="checkbox"/> SUPPLIED RESPIRATOR <input checked="" type="checkbox"/> PPE CLOTHING: <u>High-</u> <u>visibility vest or high-vis</u> <u>outerwear</u>	
<input checked="" type="checkbox"/> GLOVES: <u>Leather/cut-</u> <u>resistant/chemical resistant</u> <input checked="" type="checkbox"/> OTHER: Tyvek and rubber boots as necessary, dust mask as necessary					
REQUIRED AND / OR RECOMMENDED EQUIPMENT					
Required Equipment: Site map, emergency contact list, documentation of urgent care/hospital routes and / or guide familiar with Site, operating cell phone or walkie-talkie if Site allows.					
Commitment to Safety – All personnel onsite will actively participate in SPSA performance by verbalizing SPSAs throughout the day.					
EXCLUSION ZONE (EZ): A minimum 10' exclusion zone will be maintained around equipment.					
SITE SECURITY: Prior to site inspection verify appropriate method to address Site Security concerns as it relates to potential criminal activity, homeless population, and/or isolation concerns. Work with the Project Principal and/or Project Manager to address appropriately.					
Assess 1st JOB STEPS		Analyze 2nd POTENTIAL HAZARDS		Act 3rd CRITICAL ACTIONS	
1. Check in with Site contact.		1a. CONTACT/EXPOSURE/FALL: Personal injury caused by lack of site specific hazards.		1a. Inquire about hazards and other activities taking place at the Site. 1a. Inform Site contact of work scope, timeline and location(s). 1a. Discuss emergency evacuation procedures and muster points with Site contact.	
2. Traversing the Site		2a. CONTACT: Property damage and personal injury caused by obstructions/vehicles or unauthorized personnel at remote Sites. 2b. FALL: Uneven terrain and weather conditions. Overgrown shrubs and vines. Equipment in the work zone. 2c. OVEREXERTION: Muscle strain while carrying equipment. 2d. EXPOSURE: Biological hazards – ticks; bees/wasps; poison ivy; insects; (Ticks are most active any time the temperature is above freezing, typically from March to November.)		2a. All equipment must be stowed and secured prior to moving. 2a. Maintain speed limit as posted on-site. 2a. When possible drive on established roadways. 2a. Yield to all pedestrians. 2a. Use pull-through spots or back into parking spots. 2a. Don high visibility clothing/safety vest. If working at remote Site, add orange accessories during hunting season. 2b. Inspect walking path for uneven terrain, weather-related hazards (i.e., ice, puddles, snow, etc.), and obstructions prior to mobilizing equipment. 2b. When possible, use established pathways and walk on stable, secure ground. 2b. Communicate traversing hazards with others. 2c. When carrying equipment to/from work area, use proper lifting techniques; keep back straight, lift with legs, keep load close to body, never reach with a load. Ensure that loads are balanced to reduce the potential for muscle strain. Use mechanical assistance or make multiple trips to carry equipment. 2d. Inspect area to avoid contact with biological hazards. 2d. Ticks: • Treat outer clothing including pants, shirts, socks, boots and hats the evening before with Permethrin (allowing at least two hours before use). • Apply DEET to exposed skin before travelling to the Site and reapply after two hours. • Check for ticks during and after work. 2d. Bees: • Use bee spray as appropriate to deter/eliminate bees. • Protect exposed skin with insect repellent. 2d. Poison Ivy:	

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object; Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy Source – electricity, pressure, compression/tension.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

	<p>2e. EXPOSURE: Heat Stress & Cold Stress. Personal injury from working in inclement weather conditions.</p>	<ul style="list-style-type: none"> Identify areas of poison ivy and spray with weed killer. Don Tyvek and rubber boots while traversing poison ivy areas. If skin contacts poison ivy, wash skin thoroughly with soap and water. <p>2e. Wear sunscreen with SPF 15 or greater on exposed skin whenever 30 minutes or more of sun exposure is expected.</p> <p>2e. Watch for heat stress symptoms (muscle cramping, exhaustion, dizziness, rapid and shallow breathing). Take breaks as needed.</p> <p>2e. Watch for cold stress symptoms (severe shivering, slowing of body movement, weakness, stumbling or inability to walk, collapse). Take breaks as needed.</p> <p>2e. Wear appropriate rain gear as needed.</p> <p>2e. Take frequent breaks if tired, wet, or cold/hot. Drink water.</p> <p>2e. If lightning is observed, wait 30 minutes after last thunder boom/lightning bolt in a sheltered location (car acceptable) before starting work again.</p>
3. Walking near heavy equipment and machinery.	<p>3a. CONTACT: Personal injury from Site and roadway traffic. Personal injury from flying debris</p> <p>3b. OVEREXERTION: Personal injury from lifting/moving/rotating equipment.</p> <p>3c. EXPOSURE: Hearing damage from noise generating equipment/processes. Inhalation/exposure to hazardous vapors and or dust.</p> <p>3d. EXPOSURE: Working in a remote area.</p>	<p>3a. See 2a.</p> <p>3a. Maintain an exclusion zone of at least 10'-25' feet from all engaged equipment.</p> <p>3a. Keep body parts out of the line of fire of pinch points.</p> <p>3a. Wear appropriate PPE always.</p> <p>3b. See 2c.</p> <p>3c. Wear hearing protection if >85 dBA. (i.e. noise levels which require you to raise your voice to communicate)</p> <p>3c. Always wear leather gloves when handling any tools or equipment.</p> <p>3c. Always wear appropriate PPE based off chemicals present.</p> <p>3d. Use the "buddy system" whenever possible. If working alone, contact PM upon arrival/departure, as well as during work activities prior to commencing work if applicable.</p> <p>3d. Always carry a communication (i.e., cell phone, walkie-talkie) or directional (i.e., map, compass, etc.) device when traversing remote areas.</p>
4. Working in adverse weather conditions.	<p>4a. EXPOSURE: Heat Stress & Cold Stress. Personal injury from working in inclement weather conditions.</p>	<p>4a. Watch for heat stress symptoms (muscle cramping, exhaustion, dizziness, rapid and shallow breathing). Take breaks as needed.</p> <p>4a. Watch for cold stress symptoms (severe shivering, slowing of body movement, weakness, stumbling or inability to walk, collapse). Take breaks as needed.</p> <p>4a. Wear appropriate rain gear as needed.</p> <p>4a. Take frequent breaks if tired, wet, or cold/hot. Drink water.</p> <p>4a. If lightning is observed, wait 30 minutes after last thunder boom/lightning bolt in a sheltered location (car acceptable) before starting work again.</p>
5. Departing Site.	<p>5a. EXPOSURE: Exposure to unnecessary hazards should personnel believe Roux is on-Site during an emergency and conduct a search.</p>	<p>5a. Sign out or notify Site contact and Roux Project Manager of your departure.</p>

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object; Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy Source - electricity, pressure, compression/tension.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

JOB SAFETY ANALYSIS		Ctrl. No. GEN-020	DATE: 8/6/2018	<input type="checkbox"/> NEW <input checked="" type="checkbox"/> REVISED	PAGE 1 of 2
JSA TYPE CATEGORY: GENERIC		WORK TYPE: Gauging & Sampling	WORK ACTIVITY (Description): Soil Sampling		
DEVELOPMENT TEAM		POSITION / TITLE	REVIEWED BY:		POSITION / TITLE
MaryBeth Lyons		Project Scientist	Brian Hobbs		Corporate Health and Safety Manager
REQUIRED AND / OR RECOMMENDED PERSONAL PROTECTIVE EQUIPMENT					
<input type="checkbox"/> LIFE VEST <input checked="" type="checkbox"/> HARD HAT <input type="checkbox"/> LIFELINE / BODY HARNESS <input checked="" type="checkbox"/> SAFETY GLASSES <input checked="" type="checkbox"/> FLAME RESISTANT CLOTHING (as needed)		<input type="checkbox"/> GOGGLES <input type="checkbox"/> FACE SHIELD: <input checked="" type="checkbox"/> HEARING PROTECTION: (as needed) <input checked="" type="checkbox"/> SAFETY SHOES: Composite-toe or steel toe boots	<input type="checkbox"/> AIR PURIFYING RESPIRATOR <input type="checkbox"/> SUPPLIED RESPIRATOR <input checked="" type="checkbox"/> PPE CLOTHING: Fluorescent reflective vest or high visibility clothing		<input checked="" type="checkbox"/> GLOVES: Leather, Nitrile and cut resistant <input checked="" type="checkbox"/> OTHER: Insect repellent, sunscreen (as needed)
REQUIRED AND / OR RECOMMENDED EQUIPMENT					
Recommended Equipment: 42" traffic cones, caution tape, trowel					
COMMITMENT TO SAFETY- All personnel onsite will actively participate in hazard recognition and mitigation throughout the day by verbalizing SPSAs.					
EXCLUSION ZONE (EZ): A 10-foot exclusion zone will be maintained around moving equipment, if present.					
Assess 1°JOB STEPS	Analyze 2°POTENTIAL HAZARDS	Act 3°CRITICAL ACTIONS			
1. Secure location	1a. CONTACT: Personnel and vehicular traffic may enter the work area. 1b. FALL: Tripping/falling due to uneven terrain or entry/exit from excavations. 1c. EXPOSURE: Exposure to sun and excessive heat, possibly causing sunburn, heat exhaustion or heat stroke. Exposure to cold temperatures possibly causing cold stress. Skin burn as a result of fire, if applicable. Exposure to explosive vapors due to tank farm operations. Exposure to airborne dust due to high wind speeds. Biological hazards - ticks, bees/wasps, poison ivy, thorns, insects, etc.	1a. If in an area with foot or vehicle traffic, delineate the work area with 42" traffic cones and/or caution tape to prevent exposure to traffic and inform others of work activity. 1a. Wear reflective vest and/or high visibility clothing. 1a. Face the direction of any vehicular traffic. Position vehicle to protect worker from traffic. 1a. Communicate work activity with adjacent work areas. 1b. Inspect pathways and work area for uneven terrain, weather-related hazards (i.e., ice, puddles, snow, etc.), and obstructions. 1b. Use established pathways and walk on stable, secure ground. 1b. Stage equipment and tools in a convenient, stable, and orderly manner. Store equipment at lowest potential energy. 1b. Roux employees should stay 5 feet from in-progress excavations and trenches. Should entry to an excavation be required (when stabilization is complete), ladders must be employed for steep embankments, excavations, pits, and trenches. 1c. Wear sunscreen with an SPF 15 or greater whenever 30 minutes or more of exposure is expected. 1c. Use a tent to shade the work area from direct sunlight particularly when warm temperatures are expected. 1c. Be aware of the location of all Site personnel. 1c. Watch for heat stress symptoms (muscle cramping, exhaustion, dizziness, rapid and shallow breathing). 1c. Watch for cold stress symptoms (severe shivering, slowing of body movement, weakness, stumbling or inability to walk, collapse). 1c. Take breaks for rest and water as necessary. Move to an area that is well shaded or a climate controlled area (i.e., car, site trailer, etc.). 1c. No open flames/heat sources. 1c. Flame retardant clothing must be worn when specified by Site policy. 1c. Cell phones should be disabled when specified by Site policy. 1c. Pre-treat field clothing with Permethrin prior to site visit to kill ticks and insects. 1c. Wear long sleeved shirts and tuck in (or tape) pant legs into socks or boots to prevent ticks from reaching skin. 1c. Spray insect repellent containing DEET on exposed skin when working in overgrown areas of the Site. 1c. Inspect area to avoid contact with biological hazards. 1c. Wear cut-resistant gloves when handling branches, shrubs, etc. that may lie within the walking path. 1c. Wear spoggles if the average wind speeds are above 15 mph. 1c. Personnel shall examine themselves and co-worker's outer clothing for ticks periodically when onsite. 1c. If skin comes in contact with poison ivy, wash skin thoroughly with soap and water. If rash persists after washing, immediately notify your supervisor, the OM and OHSM for possible consultation with a physician at an approved Occupational Health Clinic.			

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object; Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy Source - electricity, pressure, compression/tension.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

Assess ¹ JOB STEPS	Analyze ² POTENTIAL HAZARDS	Act ³ CRITICAL ACTIONS
2. Collect Soil Sample	<p>2a. CONTACT: Personal injury from pinch points, cuts, and abrasions from sampling equipment tools, and material within soil sample. Personal injury from contact with moving equipment while sampling. Personal injury from contact with glass sample jars.</p> <p>2b. EXPOSURE: Exposure to contamination (impacted soil) and/or lab preservatives.</p> <p>2c. EXERTION: Exertion due to repetitive motion and ergonomics.</p>	<p>2a. Wear cut-resistant (i.e., Kevlar) gloves under chemical-resistant (nitrile) disposable gloves when handling soil samples and sampling jars. 2a. Where possible, use trowel or equivalent tool to avoid contact with soil. 2a. If sampling from bucket of heavy equipment, ensure all equipment is off and operator utilizes the "show me your hands" policy. 2a. See 1a.</p> <p>2b. Wear chemical-resistant (nitrile) disposable gloves over cut resistant gloves to protect hands when handling samples; use containment material or plastic sheeting to protect surrounding areas. 2b. Wear safety glasses to protect eyes from dust or air-borne contaminants that may results from disturbing the soil. 2b. Where possible, remain upgradient from sample location if collecting soil sample from stockpile, drill rig, etc. to avoid breathing contaminant vapors, if they are present. 2b. When collecting soil sample from hand auger, put large zip lock bag over entire auger to prevent spillage of soil on to the ground. 2b. Open sample jars slowly and fill carefully to avoid contact with preservatives.</p> <p>2c. Utilize a table or raised surface for soil sampling if multiple soil samples are going to be taken to minimize repetitive bending motion.</p>
3. Decontaminate equipment	<p>3a. EXPOSURE/CONTACT: Contamination (e.g., Separate Phase Hydrocarbons (SPH), contaminated vapors and/or soil).</p> <p>3b. EXPOSURE: Chemicals in cleaning solution including ammonia.</p>	<p>3a. Wear chemical-resistant (nitrile) disposable gloves and safety glasses. 3a. Use an absorbent pad to clean spills. 3a. Properly dispose of used materials/PPE in provided drums in designated drum storage area. 3a. Remain upwind of sample and avoid breathing contaminant vapors, if they are present.</p> <p>3b. Wear chemical-resistant (nitrile) disposable gloves and safety glasses. 3b. Work on the upwind side of decontamination area. 3b. Use an absorbent pad to clean spills. 3b. Properly dispose of used materials/PPE in provided drums in designated drum storage area. Ensure that all drums are properly labeled and secured.</p>

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object; Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy Source – electricity, pressure, compression/tension.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

JOB SAFETY ANALYSIS		Ctrl. No. GEN-021	DATE: 8/6/2018	<input type="checkbox"/> NEW <input checked="" type="checkbox"/> REVISED	PAGE 1 of 2
JSA TYPE CATEGORY: GENERIC		WORK TYPE Gauging and Sampling		WORK ACTIVITY (Description) Soil Vapor Sampling (Permanent Monitoring Points)	
DEVELOPMENT TEAM		POSITION / TITLE		REVIEWED BY:	
Jeff Wills		Project Hydrogeologist		Brian Hobbs	
Julie Moriarity		Project Scientist		Corporate Health and Safety Manager	
REQUIRED AND / OR RECOMMENDED PERSONAL PROTECTIVE EQUIPMENT					
<input type="checkbox"/> LIFE VEST <input checked="" type="checkbox"/> HARD HAT <input type="checkbox"/> LIFELINE / BODY HARNESS <input checked="" type="checkbox"/> SAFETY GLASSES		<input type="checkbox"/> GOGGLES <input type="checkbox"/> FACE SHIELD <input type="checkbox"/> HEARING PROTECTION <input checked="" type="checkbox"/> SAFETY SHOES: <u>Steel-toe boots</u>		<input type="checkbox"/> AIR PURIFYING RESPIRATOR <input type="checkbox"/> SUPPLIED RESPIRATOR <input checked="" type="checkbox"/> PPE CLOTHING: <u>Fluorescent reflective vest or high visibility clothing</u> <input checked="" type="checkbox"/> GLOVES: <u>Cut-resistant & Nitriles</u> <input checked="" type="checkbox"/> OTHER: <u>Bug Spray, Sun Screen, Knee Pads or kneeling pad</u>	
REQUIRED AND / OR RECOMMENDED EQUIPMENT					
9/16" Socket and Wrench, Non-Toxic Clay, Teflon-Lined Tubing, Masterflex Tubing, Air Pump with Low Flow, Dry Cal, Enclosure (Bucket with 2 holes), Helium Gas Canister, Summa Canisters and Flow Controllers, MultiRae Photo Ionization Detector (PID), Helium Detector, Tubing Cutter, 42-inch Safety Cones, Caution Tape or Retractable Cone Bars					
COMMITMENT TO SAFETY- All personnel onsite will actively participate in hazard recognition and mitigation throughout the day by verbalizing SPSAs.					
EXCLUSION ZONE (EZ): A 5-foot exclusion zone will be maintained for non-essential personnel.					
Assess 1JOB STEPS		Analyze 2POTENTIAL HAZARDS		Act 3CRITICAL ACTIONS	
1. Define and secure work area.		1a. FALL: Potential tripping hazards. 1b. CONTACT: Potential contact with moving vehicles or pedestrians. 1c. EXERTION: Muscle strain while lifting and carrying equipment.		1a. Ensure work area is secure and inform others (third party) of work activity. 1a. Remove tripping hazards and inspect walking path for uneven terrain, weather-related hazards (i.e., ice, puddles, snow, etc.), and obstructions prior to mobilizing equipment. 1b. If working alongside roads, look both ways before entering roadways, face traffic, and utilize work vehicle to protect employees. 1b. Delineate work area (including vehicles) with traffic safety cones and caution tape or retractable cone bars. 1b. Maintain a 5-foot exclusion zone. 1b. Wear high visibility clothing or reflective safety vest. 1c. When carrying equipment to/from work area, keep back straight, lift with legs, keep load close to body, never reach with a load. Ensure that loads are balanced. Use mechanical assistance/make multiple trips to carry equipment.	
2. Remove well cover / close well cover.		2a. CONTACT/CAUGHT: Pinch points and scrapes associated with hand tools and well covers. 2b. FALL: Potential tripping hazards associated with installing bolts. 2c. EXERTION: Physical exertion to remove bolts that were over torqued or stripped.		2a. Keep hands away from pinch points. 2a. Use hand tools with extensions to remove and replace well covers. 2a. Wear cut-resistant gloves. 2a. Use knee pads or kneeling pad when repetitive kneeling on rough ground is anticipated. 2b. Place security bolts in secure location so not to create tripping hazards. Replace security bolts so that they fit flush with monitoring well covers. 2c. Replace any security bolts that show signs of stripping. Do not over tighten. 2c. Use body positioning and bending techniques that minimize muscle strain; keep back straight, bend at the knees. 2c. See 2a.	

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object;

Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy Source - Electricity, pressure, tension/compression, torque.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

Assess 1JOB STEPS	Analyze 2POTENTIAL HAZARDS	Act 3CRITICAL ACTIONS
3. Screen vapor point with PID.	3a. FALL: Potential tripping hazards associated with equipment. 3b. EXPOSURE: Inhalation of soil vapor	3a. Place equipment in one area close to the sampling location. 3b. Identify area where equipment is to be stored within the work area (away from main walking path). 3a. Don't leave equipment on the ground. Return equipment to storage area between uses. 3b. Replace brass caps immediately upon completion to avoid soil vapors migrating to the surface through sample tubing. 3b. Stand upwind of sample point during screening activities.
4. Remove / replace brass caps at the end of the sample tubing.	4a. CONTACT: Pinch points associated with hand tools and brass caps. 4b. EXPOSURE: Potential pathway for vapors to migrate to land surface.	4a. Use wrench to remove and replace brass caps. 4a. Wear cut-resistant gloves to protect against pinch points and scrapes. 4b. See 3b. 4b. Stand up wind of sample point location.
5. Set up soil vapor sampling equipment and calibration of meters.	5a. FALL: Potential tripping hazards associated with equipment and tubing.5b. 5b. CONTACT: Pinch points associated with handling equipment. 5c. EXPOSURE: Inhalation of calibration gas and helium.	5a. See 3a. 5a. Keep tubing slack to a minimum and locate the summa canister as close to the sampling location as possible. 5a. Avoid stepping over equipment and tubing. 5b. Do not place fingers/hands under sampling equipment. 5b. Make multiple trips when unloading equipment in work area. 5b. Wear cut-resistant gloves to protect against pinch points while handling sampling equipment. 5c. Review SDS for each type of calibration gas used before calibrating. 5c. Calibrate meters in a well-ventilated area and keep air flow regulator away from face. 5c. Close valve on canisters after use to avoid inhalation of excess helium or calibration gas. 5c. Stand up wind of bucket during helium tracer gas test.
6. Cleaning Work Area.	6a. FALL: Potential tripping hazards associated with equipment and tubing. 6b. CONTACT: Storing and transport of equipment in car.	6a. See 3a. 6a. See 3b. 6b. Ensure that equipment is placed securely in the vehicle. Do not stack equipment on top of each other. Secure equipment so that it will not slide while being transported. 6b. Wear cut-resistant gloves while handling/loading equipment.

¹ Each Job or Operation consists of a set of tasks / steps. Be sure to list all the steps needed to perform job.

² A hazard is a potential danger. Break hazards into six types: Contact - victim is struck by or strikes an object; Caught - victim is caught on, caught in or caught between objects; Fall - victim falls to ground or lower level (includes slips and trips); Exertion - excessive strain or stress / ergonomics / lifting techniques; Exposure - inhalation/skin hazards; Energy Source – Electricity, pressure, tension/compression, torque.

³ Using the first two columns as a guide, decide what actions or procedures are necessary to eliminate or minimize the risk. List the recommended safe operating procedures. Say exactly what needs to be done - such as "use two persons to lift". Avoid general statements such as, "be careful".

SDSs for Chemicals Used

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**1 Identification of the substance/mixture and of the supplier****1.1 Product identifier****Trade Name:** Alconox**Synonyms:****Product number:** Alconox**1.2 Application of the substance / the mixture :** Cleaning material/Detergent**1.3 Details of the supplier of the Safety Data Sheet**

Manufacturer	Supplier
Alconox, Inc. 30 Glenn Street White Plains, NY 10603 1-914-948-4040	Not Applicable

Emergency telephone number:**ChemTel Inc**

North America: 1-800-255-3924

International: 01-813-248-0585

2 Hazards identification**2.1 Classification of the substance or mixture:**

In compliance with EC regulation No. 1272/2008, 29CFR1910/1200 and GHS Rev. 3 and amendments.

Hazard-determining components of labeling:Tetrasodium Pyrophosphate
Sodium tripolyphosphate
Sodium Alkylbenzene Sulfonate**2.2 Label elements:**

Skin irritation, category 2.

Eye irritation, category 2A.

Hazard pictograms:**Signal word:** Warning**Hazard statements:**

H315 Causes skin irritation.

H319 Causes serious eye irritation.

Precautionary statements:

P264 Wash skin thoroughly after handling.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

P302+P352 If on skin: Wash with soap and water.

P305+P351+P338 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing.

P321 Specific treatment (see supplemental first aid instructions on this label).

P332+P313 If skin irritation occurs: Get medical advice/attention.

P362 Take off contaminated clothing and wash before reuse.

P501 Dispose of contents and container as instructed in Section 13.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**Additional information:** None.**Hazard description****Hazards Not Otherwise Classified (HNOC):** None**Information concerning particular hazards for humans and environment:**

The product has to be labelled due to the calculation procedure of the "General Classification guideline for preparations of the EU" in the latest valid version.

Classification system:

The classification is according to EC regulation No. 1272/2008, 29CFR1910/1200 and GHS Rev. 3 and amendments, and extended by company and literature data. The classification is in accordance with the latest editions of international substances lists, and is supplemented by information from technical literature and by information provided by the company.

3 Composition/information on ingredients**3.1 Chemical characterization :** None**3.2 Description :** None**3.3 Hazardous components (percentages by weight)**

Identification	Chemical Name	Classification	Wt. %
CAS number: 7758-29-4	Sodium tripolyphosphate	Skin Irrit. 2 ; H315 Eye Irrit. 2; H319	12-28
CAS number: 68081-81-2	Sodium Alkylbenzene Sulfonate	Acute Tox. 4; H303 Skin Irrit. 2 ; H315 Eye Irrit. 2; H319	8-22
CAS number: 7722-88-5	Tetrasodium Pyrophosphate	Skin Irrit. 2 ; H315 Eye Irrit. 2; H319	2-16

3.4 Additional Information : None.**4 First aid measures****4.1 Description of first aid measures****General information:** None.**After inhalation:**

Maintain an unobstructed airway.

Loosen clothing as necessary and position individual in a comfortable position.

After skin contact:

Wash affected area with soap and water.

Seek medical attention if symptoms develop or persist.

After eye contact:

Rinse/flush exposed eye(s) gently using water for 15-20 minutes.

Remove contact lens(es) if able to do so during rinsing.

Seek medical attention if irritation persists or if concerned.

After swallowing:

Rinse mouth thoroughly.

Seek medical attention if irritation, discomfort, or vomiting persists.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**4.2 Most important symptoms and effects, both acute and delayed**

None

4.3 Indication of any immediate medical attention and special treatment needed:

No additional information.

5 Firefighting measures**5.1 Extinguishing media****Suitable extinguishing agents:**

Use appropriate fire suppression agents for adjacent combustible materials or sources of ignition.

For safety reasons unsuitable extinguishing agents : None**5.2 Special hazards arising from the substance or mixture :**

Thermal decomposition can lead to release of irritating gases and vapors.

5.3 Advice for firefighters**Protective equipment:**

Wear protective eye wear, gloves and clothing.

Refer to Section 8.

5.4 Additional information :

Avoid inhaling gases, fumes, dust, mist, vapor and aerosols.

Avoid contact with skin, eyes and clothing.

6 Accidental release measures**6.1 Personal precautions, protective equipment and emergency procedures :**

Ensure adequate ventilation.

Ensure air handling systems are operational.

6.2 Environmental precautions :

Should not be released into the environment.

Prevent from reaching drains, sewer or waterway.

6.3 Methods and material for containment and cleaning up :

Wear protective eye wear, gloves and clothing.

6.4 Reference to other sections : None**7 Handling and storage****7.1 Precautions for safe handling :**

Avoid breathing mist or vapor.

Do not eat, drink, smoke or use personal products when handling chemical substances.

7.2 Conditions for safe storage, including any incompatibilities :

Store in a cool, well-ventilated area.

7.3 Specific end use(s):

No additional information.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**8 Exposure controls/personal protection****8.1 Control parameters :**

7722-88-5, Tetrasodium Pyrophosphate, OSHA TWA 5 mg/m3.

8.2 Exposure controls**Appropriate engineering controls:**

Emergency eye wash fountains and safety showers should be available in the immediate vicinity of use or handling.

Respiratory protection:

Not needed under normal conditions.

Protection of skin:

Select glove material impermeable and resistant to the substance.

Eye protection:

Safety goggles or glasses, or appropriate eye protection.

General hygienic measures:

Wash hands before breaks and at the end of work.

Avoid contact with skin, eyes and clothing.

9 Physical and chemical properties

Appearance (physical state, color):	White and cream colored flakes - powder	Explosion limit lower: Explosion limit upper:	Not determined or not available. Not determined or not available.
Odor:	Not determined or not available.	Vapor pressure at 20°C:	Not determined or not available.
Odor threshold:	Not determined or not available.	Vapor density:	Not determined or not available.
pH-value:	9.5 (aqueous solution)	Relative density:	Not determined or not available.
Melting/Freezing point:	Not determined or not available.	Solubilities:	Not determined or not available.
Boiling point/Boiling range:	Not determined or not available.	Partition coefficient (n-octanol/water):	Not determined or not available.
Flash point (closed cup):	Not determined or not available.	Auto/Self-ignition temperature:	Not determined or not available.
Evaporation rate:	Not determined or not available.	Decomposition temperature:	Not determined or not available.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015

Trade Name: Alconox			
Flammability (solid, gaseous):	Not determined or not available.	Viscosity:	a. Kinematic: Not determined or not available. b. Dynamic: Not determined or not available.
Density at 20°C:	Not determined or not available.		

10 Stability and reactivity**10.1 Reactivity :** None**10.2 Chemical stability :** None**10.3 Possibility hazardous reactions :** None**10.4 Conditions to avoid :** None**10.5 Incompatible materials :** None**10.6 Hazardous decomposition products :** None**11 Toxicological information****11.1 Information on toxicological effects :****Acute Toxicity:****Oral:**

: LD50 > 5000 mg/kg oral rat - Product .

Chronic Toxicity: No additional information.**Skin corrosion/irritation:**

Sodium Alkylbenzene Sulfonate: Causes skin irritation. .

Serious eye damage/irritation:

Sodium Alkylbenzene Sulfonate: Causes serious eye irritation .

Tetrasodium Pyrophosphate: Rabbit - Risk of serious damage to eyes .

Respiratory or skin sensitization: No additional information.**Carcinogenicity:** No additional information.**IARC (International Agency for Research on Cancer):** None of the ingredients are listed.**NTP (National Toxicology Program):** None of the ingredients are listed.**Germ cell mutagenicity:** No additional information.**Reproductive toxicity:** No additional information.**STOT-single and repeated exposure:** No additional information.**Additional toxicological information:** No additional information.**12 Ecological information**

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**12.1 Toxicity:**

Sodium Alkylbenzene Sulfonate: Fish, LC50 1.67 mg/l, 96 hours.

Sodium Alkylbenzene Sulfonate: Aquatic invertebrates, EC50 Daphnia 2.4 mg/l, 48 hours.

Sodium Alkylbenzene Sulfonate: Aquatic Plants, EC50 Algae 29 mg/l, 96 hours.

Tetrasodium Pyrophosphate: Fish, LC50 - other fish - 1,380 mg/l - 96 h.

Tetrasodium Pyrophosphate: Aquatic invertebrates, EC50 - Daphnia magna (Water flea) - 391 mg/l - 48 h.

12.2 Persistence and degradability: No additional information.**12.3 Bioaccumulative potential:** No additional information.**12.4 Mobility in soil:** No additional information.**General notes:** No additional information.**12.5 Results of PBT and vPvB assessment:****PBT:** No additional information.**vPvB:** No additional information.**12.6 Other adverse effects:** No additional information.**13 Disposal considerations****13.1 Waste treatment methods (consult local, regional and national authorities for proper disposal)****Relevant Information:**

It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities. (US 40CFR262.11).

14 Transport information**14.1 UN Number:**

None

ADR, ADN, DOT, IMDG, IATA

14.2 UN Proper shipping name:

None

ADR, ADN, DOT, IMDG, IATA

14.3 Transport hazard classes:

ADR, ADN, DOT, IMDG, IATA

Class: None**Label:** None**LTD. QTY:** None**US DOT****Limited Quantity Exception:**

None

Bulk:**RQ (if applicable):** None**Proper shipping Name:** None**Hazard Class:** None**Packing Group:** None**Marine Pollutant (if applicable):** No additional information.**Non Bulk:****RQ (if applicable):** None**Proper shipping Name:** None**Hazard Class:** None**Packing Group:** None**Marine Pollutant (if applicable):** No additional information.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015

Trade Name: Alconox	
Comments: None	Comments: None
14.4 Packing group: ADR, ADN, DOT, IMDG, IATA	None
14.5 Environmental hazards :	None
14.6 Special precautions for user: Danger code (Kemler): EMS number: Segregation groups:	None None None None
14.7 Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code: Not applicable.	
14.8 Transport/Additional information: Transport category: Tunnel restriction code: UN "Model Regulation":	
None None None	

15 Regulatory information**15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture.****North American****SARA****Section 313 (specific toxic chemical listings):** None of the ingredients are listed.**Section 302 (extremely hazardous substances):** None of the ingredients are listed.**CERCLA (Comprehensive Environmental Response, Clean up and Liability Act) Reportable****Spill Quantity:** None of the ingredients are listed.**TSCA (Toxic Substances Control Act):****Inventory:** All ingredients are listed.**Rules and Orders:** Not applicable.**Proposition 65 (California):****Chemicals known to cause cancer:** None of the ingredients are listed.**Chemicals known to cause reproductive toxicity for females:** None of the ingredients are listed.**Chemicals known to cause reproductive toxicity for males:** None of the ingredients are listed.**Chemicals known to cause developmental toxicity:** None of the ingredients are listed.**Canadian****Canadian Domestic Substances List (DSL):**

All ingredients are listed.

EU**REACH Article 57 (SVHC):** None of the ingredients are listed.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**Germany MAK:** Not classified.**Asia Pacific****Australia****Australian Inventory of Chemical Substances (AICS):** All ingredients are listed.**China****Inventory of Existing Chemical Substances in China (IECSC):** All ingredients are listed.**Japan****Inventory of Existing and New Chemical Substances (ENCS):** All ingredients are listed.**Korea****Existing Chemicals List (ECL):** All ingredients are listed.**New Zealand****New Zealand Inventory of Chemicals (NZOIC):** All ingredients are listed.**Philippines****Philippine Inventory of Chemicals and Chemical Substances (PICCS):** All ingredients are listed.**Taiwan****Taiwan Chemical Substance Inventory (TSCI):** All ingredients are listed.**16 Other information****Abbreviations and Acronyms:** None**Summary of Phrases****Hazard statements:**

H315 Causes skin irritation.

H319 Causes serious eye irritation.

Precautionary statements:

P264 Wash skin thoroughly after handling.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

P302+P352 If on skin: Wash with soap and water.

P305+P351+P338 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing.

P321 Specific treatment (see supplemental first aid instructions on this label).

P332+P313 If skin irritation occurs: Get medical advice/attention.

P362 Take off contaminated clothing and wash before reuse.

P501 Dispose of contents and container as instructed in Section 13.

Manufacturer Statement:

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

NFPA: 1-0-0

Safety Data Sheet


according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015

Revision : 12.10.2015

Trade Name: Alconox

HMIS: 1-0-0



Health	3
Fire	0
Reactivity	1
Personal Protection	

Material Safety Data Sheet

Hydrochloric acid MSDS

Section 1: Chemical Product and Company Identification

Product Name: Hydrochloric acid

Catalog Codes: SLH1462, SLH3154

CAS#: Mixture.

RTECS: MW4025000

TSCA: TSCA 8(b) inventory: Hydrochloric acid

CI#: Not applicable.

Synonym: Hydrochloric Acid; Muriatic Acid

Chemical Name: Not applicable.

Chemical Formula: Not applicable.

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Hydrogen chloride	7647-01-0	20-38
Water	7732-18-5	62-80

Toxicological Data on Ingredients: Hydrogen chloride: GAS (LC50): Acute: 4701 ppm 0.5 hours [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Very hazardous in case of skin contact (corrosive, irritant, permeator), of eye contact (irritant, corrosive), of ingestion, . Slightly hazardous in case of inhalation (lung sensitizer). Non-corrosive for lungs. Liquid or spray mist may produce tissue damage particularly on mucous membranes of eyes, mouth and respiratory tract. Skin contact may produce burns. Inhalation of the spray mist may produce severe irritation of respiratory tract, characterized by coughing, choking, or shortness of breath. Severe over-exposure can result in death. Inflammation of the eye is characterized by redness, watering, and itching. Skin inflammation is characterized by itching, scaling, reddening, or, occasionally, blistering.

Potential Chronic Health Effects:

Slightly hazardous in case of skin contact (sensitizer). **CARCINOGENIC EFFECTS:** Classified 3 (Not classifiable for human.) by IARC [Hydrochloric acid]. **MUTAGENIC EFFECTS:** Not available. **TERATOGENIC EFFECTS:** Not available. **DEVELOPMENTAL TOXICITY:** Not available. The substance may be toxic to kidneys, liver, mucous membranes, upper respiratory tract, skin, eyes, Circulatory System, teeth. Repeated or prolonged exposure to the substance can produce target

organs damage. Repeated or prolonged contact with spray mist may produce chronic eye irritation and severe skin irritation. Repeated or prolonged exposure to spray mist may produce respiratory tract irritation leading to frequent attacks of bronchial infection. Repeated exposure to a highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Cold water may be used. Get medical attention immediately.

Skin Contact:

In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Cover the irritated skin with an emollient. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention immediately.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention immediately.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

Ingestion:

If swallowed, do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Non-flammable.

Auto-Ignition Temperature: Not applicable.

Flash Points: Not applicable.

Flammable Limits: Not applicable.

Products of Combustion: Not available.

Fire Hazards in Presence of Various Substances: of metals

Explosion Hazards in Presence of Various Substances: Non-explosive in presence of open flames and sparks, of shocks.

Fire Fighting Media and Instructions: Not applicable.

Special Remarks on Fire Hazards:

Non combustible. Calcium carbide reacts with hydrogen chloride gas with incandescence. Uranium phosphide reacts with hydrochloric acid to release spontaneously flammable phosphine. Rubidium acetylene carbides burns with slightly warm hydrochloric acid. Lithium silicide in contact with hydrogen chloride becomes incandescent. When dilute hydrochloric acid is used, gas spontaneously flammable in air is evolved. Magnesium boride treated with concentrated hydrochloric acid produces spontaneously flammable gas. Cesium acetylene carbide burns hydrogen chloride gas. Cesium carbide ignites in contact with hydrochloric acid unless acid is dilute. Reacts with most metals to produce flammable Hydrogen gas.

Special Remarks on Explosion Hazards:

Hydrogen chloride in contact with the following can cause an explosion, ignition on contact, or other violent/vigorous reaction: Acetic anhydride AgClO + CCl₄ Alcohols + hydrogen cyanide, Aluminum Aluminum-titanium alloys (with HCl vapor), 2-Amino ethanol, Ammonium hydroxide, Calcium carbide Ca₃P₂ Chlorine + dinitroanilines (evolves gas), Chlorosulfonic acid Cesium carbide Cesium acetylene carbide, 1,1-Difluoroethylene Ethylene diamine Ethylene imine, Fluorine, HClO₄ Hexalithium disilicide H₂SO₄ Metal acetylides or carbides, Magnesium boride, Mercuric sulfate, Oleum, Potassium permanganate, beta-Propiolactone Propylene oxide Rubidium carbide, Rubidium, acetylene carbide Sodium (with aqueous HCl), Sodium hydroxide Sodium tetraselenium, Sulfonic acid, Tetraselenium tetranitride, U₃P₄, Vinyl acetate. Silver perchlorate with carbon tetrachloride in the presence of hydrochloric acid produces trichloromethyl perchlorate which detonates at 40 deg. C.

Section 6: Accidental Release Measures

Small Spill:

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container. If necessary: Neutralize the residue with a dilute solution of sodium carbonate.

Large Spill:

Corrosive liquid. Poisonous liquid. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not get water inside container. Do not touch spilled material. Use water spray curtain to divert vapor drift. Use water spray to reduce vapors. Prevent entry into sewers, basements or confined areas; dike if needed. Call for assistance on disposal. Neutralize the residue with a dilute solution of sodium carbonate. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep locked up.. Keep container dry. Do not ingest. Do not breathe gas/fumes/ vapor/spray. Never add water to this product. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, organic materials, metals, alkalis, moisture. May corrode metallic surfaces. Store in a metallic or coated fiberboard drum using a strong polyethylene inner package.

Storage: Keep container tightly closed. Keep container in a cool, well-ventilated area.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Face shield. Full suit. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves. Boots.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

CEIL: 5 (ppm) from OSHA (PEL) [United States] CEIL: 7 (mg/m³) from OSHA (PEL) [United States] CEIL: 5 from NIOSH CEIL: 7 (mg/m³) from NIOSH TWA: 1 STEL: 5 (ppm) [United Kingdom (UK)] TWA: 2 STEL: 8 (mg/m³) [United Kingdom (UK)] Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Pungent. Irritating (Strong.)

Taste: Not available.

Molecular Weight: Not applicable.

Color: Colorless to light yellow.

pH (1% soln/water): Acidic.

Boiling Point:

108.58 C @ 760 mm Hg (for 20.22% HCl in water) 83 C @ 760 mm Hg (for 31% HCl in water) 50.5 C (for 37% HCl in water)

Melting Point:

-62.25°C (-80°F) (20.69% HCl in water) -46.2 C (31.24% HCl in water) -25.4 C (39.17% HCl in water)

Critical Temperature: Not available.

Specific Gravity:

1.1- 1.19 (Water = 1) 1.10 (20%and 22% HCl solutions) 1.12 (24% HCl solution) 1.15 (29.57% HCl solution) 1.16 (32% HCl solution) 1.19 (37% and 38%HCl solutions)

Vapor Pressure: 16 kPa (@ 20°C) average

Vapor Density: 1.267 (Air = 1)

Volatility: Not available.

Odor Threshold: 0.25 to 10 ppm

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water, diethyl ether.

Solubility: Soluble in cold water, hot water, diethyl ether.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Incompatible materials, water

Incompatibility with various substances:

Highly reactive with metals. Reactive with oxidizing agents, organic materials, alkalis, water.

Corrosivity:

Extremely corrosive in presence of aluminum, of copper, of stainless steel(304), of stainless steel(316). Non-corrosive in presence of glass.

Special Remarks on Reactivity:

Reacts with water especially when water is added to the product. Absorption of gaseous hydrogen chloride on mercuric sulfate becomes violent @ 125 deg. C. Sodium reacts very violently with gaseous hydrogen chloride. Calcium phosphide and hydrochloric acid undergo very energetic reaction. It reacts with oxidizers releasing chlorine gas. Incompatible with, alkali metals, carbides, borides, metal oxides, vinyl acetate, acetylides, sulphides, phosphides, cyanides, carbonates. Reacts with most metals to produce flammable Hydrogen gas. Reacts violently (moderate reaction with heat of evolution) with water especially when water is added to the product. Isolate hydrogen chloride from heat, direct sunlight, alkalies (reacts vigorously), organic materials, and oxidizers (especially nitric acid and chlorates), amines, metals, copper and alloys (e.g. brass), hydroxides, zinc (galvanized materials), lithium silicide (incandescence), sulfuric acid(increase in temperature and pressure) Hydrogen chloride gas is emitted when this product is in contact with sulfuric acid. Adsorption of Hydrochloric Acid onto silicon dioxide results in exothermic reaction. Hydrogen chloride causes aldehydes and epoxides to violently polymerize. Hydrogen chloride or Hydrochloric Acid in contact with the following can cause explosion or ignition on contact or

Special Remarks on Corrosivity:

Highly corrosive. Incompatible with copper and copper alloys. It attacks nearly all metals (mercury, gold, platinum, tantalum, silver, and certain alloys are exceptions). It is one of the most corrosive of the nonoxidizing acids in contact with copper alloys. No corrosivity data on zinc, steel. Severe Corrosive effect on brass and bronze

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Dermal contact. Eye contact. Inhalation.

Toxicity to Animals:

Acute oral toxicity (LD50): 900 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 1108 ppm, 1 hours [Mouse]. Acute toxicity of the vapor (LC50): 3124 ppm, 1 hours [Rat].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: Classified 3 (Not classifiable for human.) by IARC [Hydrochloric acid]. May cause damage to the following organs: kidneys, liver, mucous membranes, upper respiratory tract, skin, eyes, Circulatory System, teeth.

Other Toxic Effects on Humans:

Very hazardous in case of skin contact (corrosive, irritant, permeator), of ingestion, . Hazardous in case of eye contact (corrosive), of inhalation (lung corrosive).

Special Remarks on Toxicity to Animals:

Lowest Published Lethal Doses (LDL/LCL) LDL [Man] -Route: Oral; 2857 ug/kg LCL [Human] - Route: Inhalation; Dose: 1300 ppm/30M LCL [Rabbit] - Route: Inhalation; Dose: 4413 ppm/30M

Special Remarks on Chronic Effects on Humans:

May cause adverse reproductive effects (fetotoxicity). May affect genetic material.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: Skin: Corrosive. Causes severe skin irritation and burns. Eyes: Corrosive. Causes severe eye irritation/conjunctivitis, burns, corneal necrosis. Inhalation: May be fatal if inhaled. Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract. Inhalation of hydrochloric acid fumes produces nose, throat, and laryngeal burning, and irritation, pain and inflammation, coughing, sneezing, choking sensation, hoarseness, laryngeal spasms, upper respiratory tract edema, chest pains, as well as headache, and palpitations. Inhalation of high concentrations can result in corrosive burns, necrosis of bronchial epithelium, constriction of the larynx and bronchi, nasospetal perforation, glottal closure, occur, particularly if exposure is prolonged. May affect the liver. Ingestion: May be fatal if swallowed. Causes irritation and burning, ulceration, or perforation of the gastrointestinal tract and resultant peritonitis, gastric hemorrhage and infection. Can also cause nausea, vomiting (with "coffee ground" emesis), diarrhea, thirst, difficulty swallowing, salivation, chills, fever, uneasiness, shock, strictures and stenosis (esophageal, gastric, pyloric). May affect behavior (excitement), the cardiovascular system (weak rapid pulse, tachycardia), respiration (shallow respiration), and urinary system (kidneys- renal failure, nephritis). Acute exposure via inhalation or ingestion can also cause erosion of tooth enamel. Chronic Potential Health Effects: dyspnea, bronchitis. Chemical pneumonitis and pulmonary edema can also

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are less toxic than the product itself.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: Class 8: Corrosive material

Identification: : Hydrochloric acid, solution UNNA: 1789 PG: II

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

Connecticut hazardous material survey.: Hydrochloric acid Illinois toxic substances disclosure to employee act: Hydrochloric acid Illinois chemical safety act: Hydrochloric acid New York release reporting list: Hydrochloric acid Rhode Island RTK hazardous substances: Hydrochloric acid Pennsylvania RTK: Hydrochloric acid Minnesota: Hydrochloric acid Massachusetts RTK: Hydrochloric acid Massachusetts spill list: Hydrochloric acid New Jersey: Hydrochloric acid New Jersey spill list: Hydrochloric acid Louisiana RTK reporting list: Hydrochloric acid Louisiana spill reporting: Hydrochloric acid California Director's List of Hazardous Substances: Hydrochloric acid TSCA 8(b) inventory: Hydrochloric acid TSCA 4(a) proposed test rules: Hydrochloric acid SARA 302/304/311/312 extremely hazardous substances: Hydrochloric acid SARA 313 toxic chemical notification and release reporting: Hydrochloric acid CERCLA: Hazardous substances.: Hydrochloric acid: 5000 lbs. (2268 kg)

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada):

CLASS D-2A: Material causing other toxic effects (VERY TOXIC). CLASS E: Corrosive liquid.

DSCL (EEC):

R34- Causes burns. R37- Irritating to respiratory system. S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S45- In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

HMIS (U.S.A.):

Health Hazard: 3

Fire Hazard: 0

Reactivity: 1

Personal Protection:

National Fire Protection Association (U.S.A.):

Health: 3

Flammability: 0

Reactivity: 1

Specific hazard:

Protective Equipment:

Gloves. Full suit. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Face shield.

Section 16: Other Information

References:


-Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987. -SAX, N.I. Dangerous Properties of Industrial Materials. Toronto, Van Nostrand Reinold, 6e ed. 1984. -The Sigma-Aldrich Library of Chemical Safety Data, Edition II. -Guide de la loi et du règlement sur le transport des marchandises dangereuses au Canada. Centre de conformité international Ltée. 1986.

Other Special Considerations: Not available.

Created: 10/09/2005 05:45 PM


Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.



MATERIAL SAFETY DATA SHEET

Prepared to U.S. OSHA, CMA, ANSI and Canadian WHMIS Standards



PART I What is the material and what do I need to know in an emergency?

1. PRODUCT IDENTIFICATION

CHEMICAL NAME; CLASS:

ISOBUTYLENE - C₄H₈
Document Number: Isobutylene

PRODUCT USE:

For general analytical/synthetic chemical uses.

SUPPLIER/MANUFACTURER'S NAME:
ADDRESS:

MESA Specialty Gases & Equipment
3619 Pendleton Avenue, Suite C
Santa Ana, CA 92704

BUSINESS PHONE:
EMERGENCY PHONE:

1-714-434-7102
INFOTRAC: 1-800-535-5053

DATE OF PREPARATION:

May 10, 1999

2. COMPOSITION and INFORMATION ON INGREDIENTS

CHEMICAL NAME	CAS #	mole %	EXPOSURE LIMITS IN AIR					
			ACGIH		OSHA		IDLH ppm	OTHER
			TLV ppm	STEL ppm	PEL ppm	STEL ppm		
Isobutylene	115-11-7	> 99.0%	There are no specific exposure limits for Isobutylene. Isobutylene is a simple asphyxiant (SA). Oxygen levels should be maintained above 19.5%.					
Maximum Impurities		< 1.0%	None of the trace impurities in this mixture contribute significantly to the hazards associated with the product. All hazard information pertinent to this product has been provided in this Material Safety Data Sheet, per the requirements of the OSHA Hazard Communication Standard (29 CFR 1910.1200) and State equivalent standards.					

NE = Not Established

C = Ceiling Limit

See Section 16 for Definitions of Terms Used

NOTE: All WHMIS required information is included. It is located in appropriate sections based on the ANSI Z400.1-1993 format.

3. HAZARD IDENTIFICATION

EMERGENCY OVERVIEW: Isobutylene is a colorless, liquefied, flammable gas with an unpleasant odor similar to burning coal. The liquefied gas rapidly turns into a gas at standard atmospheric temperatures and pressures. Isobutylene is an asphyxiant and presents a significant health hazard by displacing the oxygen in the atmosphere. Rapid evaporation of liquid from the cylinder may cause frostbite. Both the liquid and gas pose a serious fire hazard when accidentally released. The gas is heavier than air and may travel to a source of ignition and flash back to a leak or open container. Flame or high temperature impinging on a localized area of a cylinder of Isobutylene can cause the cylinder to rupture without activating the cylinder's relief devices. Provide adequate fire protection during emergency response situations.

SYMPTOMS OF OVEREXPOSURE BY ROUTE OF EXPOSURE:

The most significant route of overexposure for this gas is by inhalation. The following paragraphs describe symptoms of exposure by route of exposure.

INHALATION: High concentrations of this gas can cause an oxygen-deficient environment. Individuals breathing such an atmosphere may experience symptoms which include headaches, ringing in ears, dizziness, drowsiness, unconsciousness, nausea, vomiting, and depression of all the senses. Under some circumstances of overexposure, death may occur. Isobutylene also has some degree of anesthetic action and can be mildly irritating to the mucous membranes. The effects associated with various levels of oxygen are as follows:

CONCENTRATION

12-16% Oxygen:

10-14% Oxygen:

6-10% Oxygen:

Below 6%:

SYMPTOMS OF EXPOSURE

Breathing and pulse rate increased, muscular coordination slightly disturbed.

Emotional upset, abnormal fatigue, disturbed respiration.

Nausea and vomiting, collapse or loss of consciousness.

Convulsive movements, possible respiratory collapse, and death.

OTHER POTENTIAL HEALTH EFFECTS: Contact with liquid or rapidly expanding gases (which are released under high pressure) may cause frostbite. Symptoms of frostbite include change in skin color to white or grayish-yellow. The pain after such contact can quickly subside.



HEALTH EFFECTS OR RISKS FROM EXPOSURE: An Explanation in **Lay Terms**. Overexposure to Isobutylene may cause the following health effects:

ACUTE: The most significant hazard associated with this gas is inhalation of oxygen-deficient atmospheres. Symptoms of oxygen deficiency include respiratory difficulty, headache, dizziness, and nausea. At high concentrations, unconsciousness or death may occur. Contact with liquefied gas or rapidly expanding gases may cause frostbite.

CHRONIC: There are currently no known adverse health effects associated with chronic exposure to Isobutylene.

TARGET ORGANS: Respiratory system.

HAZARDOUS MATERIAL INFORMATION SYSTEM

HEALTH		(BLUE)	1
FLAMMABILITY		(RED)	4
REACTIVITY		(YELLOW)	0
PROTECTIVE EQUIPMENT			B
EYES	RESPIRATORY	HANDS	BODY
	See Section 8		See Section 8

For routine industrial applications

See Section 16 for Definition of Ratings

PART II *What should I do if a hazardous situation occurs?*

4. FIRST-AID MEASURES

RESCUERS SHOULD NOT ATTEMPT TO RETRIEVE VICTIMS OF EXPOSURE TO ISOBUTYLENE WITHOUT ADEQUATE PERSONAL PROTECTIVE EQUIPMENT. At a minimum, Self-Contained Breathing Apparatus and Fire-Retardant Personal Protective equipment should be worn. Adequate fire protection must be provided during rescue situations.

4. FIRST-AID MEASURES (Continued)

Remove victim(s) to fresh air as quickly as possible. Trained personnel should administer supplemental oxygen and/or cardio-pulmonary resuscitation, if necessary. Only trained personnel should administer supplemental oxygen.

In case of frostbite, place the frostbitten part in warm water. DO NOT USE HOT WATER. If warm water is not available, or is impractical to use, wrap the affected parts gently in blankets. Alternatively, if the fingers or hands are frostbitten, place the affected area in the armpit. Encourage victim to gently exercise the affected part while being warmed. Seek immediate medical attention.

Victim(s) must be taken for medical attention. Rescuers should be taken for medical attention, if necessary. Take copy of label and MSDS to physician or other health professional with victim(s).

5. FIRE-FIGHTING MEASURES

FLASH POINT (Closed Cup): -10°C (< 14°F)

AUTOIGNITION TEMPERATURE: 465°C (869°F)


FLAMMABLE LIMITS (in air by volume, %):

Lower (LEL): 1.8%

Upper (UEL): 9.6%

FIRE EXTINGUISHING MATERIALS: Extinguish Isobutylene fires by shutting off the source of the gas. Use water spray or a foam agent to cool fire-exposed containers, structures, and equipment.

UNUSUAL FIRE AND EXPLOSION HAZARDS: When involved in a fire, this material may ignite and produce toxic gases, including carbon monoxide and carbon dioxide.

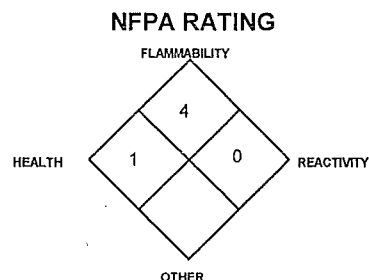

See Section 16 for Definition of Ratings

DANGER! Fires impinging (direct flame) on the outside surface of unprotected pressure storage vessels of Isobutylene can be very dangerous. Direct flame exposure on the cylinder wall can cause an explosion either by BLEVE (Boiling Liquid Expanding Vapor Explosion), or by exothermic decomposition. This is a catastrophic failure of the vessel releasing the contents into a massive fireball and explosion. The resulting fire and explosion can result in severe equipment damage and personnel injury or death over a large area around the vessel. For massive fires in large areas, use unmanned hose holder or monitor nozzles; if this is not possible, withdraw from area and allow fire to burn.

Explosion Sensitivity to Mechanical Impact: Not sensitive.

Explosion Sensitivity to Static Discharge: Static discharge may cause Isobutylene to ignite explosively if released.

SPECIAL FIRE-FIGHTING PROCEDURES: Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment. The best fire-fighting technique may be simply to let the burning gas escape from the pressurized cylinder, tank car, or pipeline. Stop the leak before extinguishing fire. If the fire is extinguished before the leak is sealed, the leaking gas could explosively re-ignite without warning and cause extensive damage, injury, or fatality. In this case, increase ventilation (in enclosed areas) to prevent flammable or explosive mixture formation. Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment. Because of the potential for a BLEVE, evacuation of non-emergency personnel is essential. If water is not available for cooling or protection of vessel exposures, evacuate the area. Refer to the North American Emergency Response Guidebook for additional information. Other information for pre-planning can be found in the American Petroleum Institute Publications 2510 and 2510A.

6. ACCIDENTAL RELEASE MEASURES

SPILL AND LEAK RESPONSE: Uncontrolled releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a release, clear the affected area, protect people, and respond with trained personnel. Adequate fire protection must be provided. Minimum Personal Protective Equipment should be **Level B: fire-retardant protective clothing, gloves resistant to tears, and Self-Contained Breathing Apparatus.**

Use only non-sparking tools and equipment. Locate and seal the source of the leaking gas. Protect personnel attempting the shut off with water spray. Allow the gas to dissipate. Monitor the surrounding area for combustible gas levels and oxygen. Combustible gas concentration must be below 10% of the LEL (LEL = 1.8%) prior to entry. The atmosphere must have at least 19.5 percent oxygen before personnel can be allowed in the area without Self-Contained Breathing Apparatus. Attempt to close the main source valve prior to entering the area. If this does not stop the release (or if it is not possible to reach the valve), allow the gas to release in place or remove it to a safe area and allow the gas to be released there.

THIS IS AN EXTREMELY FLAMMABLE GAS. Protection of all personnel and the area must be maintained.

PART III *How can I prevent hazardous situations from occurring?*

7. HANDLING and STORAGE

WORK PRACTICES AND HYGIENE PRACTICES: As with all chemicals, avoid getting Isobutylene IN YOU. Do not eat or drink while handling chemicals. Be aware of any signs of dizziness or fatigue; exposures to fatal concentrations of Isobutylene could occur without any significant warning symptoms.

STORAGE AND HANDLING PRACTICES: Cylinders should be stored in dry, well-ventilated areas away from sources of heat. Compressed gases can present significant safety hazards. Store containers away from heavily trafficked areas and emergency exits. Post "No Smoking or Open Flames" signs in storage or use areas.

SPECIAL PRECAUTIONS FOR HANDLING GAS CYLINDERS: Protect cylinders against physical damage. Store in cool, dry, well-ventilated area, away from sources of heat, ignition and direct sunlight. Do not allow area where cylinders are stored to exceed 52°C (125°F). Isolate from oxidizers such as oxygen, chlorine, or fluorine. Use a check valve or trap in the discharge line to prevent hazardous backflow. Post "No Smoking or Open Flame" signs in storage and use areas. Cylinders should be stored upright and be firmly secured to prevent falling or being knocked over. Cylinders can be stored in the open, but in such cases, should be protected against extremes of weather and from the dampness of the ground to prevent rusting. Never tamper with pressure relief devices in valves and cylinders. Electrical equipment should be non-sparking or explosion proof. The following rules are applicable to situations in which cylinders are being used:

Before Use: Move cylinders with a suitable hand truck. Do not drag, slide, or roll cylinders. Do not drop cylinders or permit them to strike each other. Secure cylinders firmly. Leave the valve protection cap, if provided, in place until cylinder is ready for use.

During Use: Use designated CGA fittings and other support equipment. Do not use adapters. Do not heat cylinder by any means to increase the discharge rate of the product from the cylinder. Use check valve or trap in discharge line to prevent hazardous backflow into the cylinder. Do not use oils or grease on gas-handling fittings or equipment.

After Use: Close main cylinder valve. Replace valve protection cap, if provided. Mark empty cylinders "EMPTY".

NOTE: Use only DOT or ASME code containers. Earth-ground and bond all lines and equipment associated with Isobutylene. Close valve after each use and when empty. Cylinders must not be recharged except by or with the consent of owner. For additional information refer to the Compressed Gas Association Pamphlet P-1, *Safe Handling of Compressed Gases in Containers*. Additionally, refer to CGA Bulletin SB-2 "Oxygen Deficient Atmospheres".

PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT: Follow practices indicated in Section 6 (Accidental Release Measures). Make certain that application equipment is locked and tagged-out safely. Purge gas handling equipment with inert gas (e.g., nitrogen) before attempting repairs.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

VENTILATION AND ENGINEERING CONTROLS: Use with adequate ventilation. Local exhaust ventilation is preferred, because it prevents Isobutylene dispersion into the work place by eliminating it at its source. If appropriate, install automatic monitoring equipment to detect the presence of potentially explosive air-gas mixtures and level of oxygen.

RESPIRATORY PROTECTION: Maintain oxygen levels above 19.5% in the workplace. Maintain level of gas below the level listed in Section 2 (Composition and Information on Ingredients). Use supplied air respiratory protection if oxygen levels are below 19.5% or during emergency response to a release of Isobutylene. If respiratory protection is required, follow the requirements of the Federal OSHA Respiratory Protection Standard (29 CFR 1910.134) or equivalent State standards.

EYE PROTECTION: Splash goggles or safety glasses, for protection from rapidly expanding gases and splashes of liquid Isobutylene.

HAND PROTECTION: Wear gloves resistant to tears when handling cylinders of Isobutylene. Use low-temperature protective gloves (e.g., Kevlar) when working with containers of liquid Isobutylene.

BODY PROTECTION: Use body protection appropriate for task. Transfer of large quantities under pressure may require protective equipment appropriate to protect employees from splashes of liquefied product, as well as fire retardant items.

9. PHYSICAL and CHEMICAL PROPERTIES

VAPOR DENSITY @ 21.1°C (70°F): 2.396 kg/m³ (0.1496 lb/ft³)

pH: Not applicable.

SPECIFIC GRAVITY (air = 1): 1.997

FREEZING POINT: -140°C (-220.6°F)

SOLUBILITY IN WATER: Insoluble.

BOILING POINT @ 1 atm: -6.9°C (19.6°F)

EVAPORATION RATE (nBuAc = 1): Not applicable.

EXPANSION RATIO: Not applicable

ODOR THRESHOLD: Not established.

VAPOR PRESSURE (psia): 39

COEFFICIENT WATER/OIL DISTRIBUTION: Not applicable.

SPECIFIC VOLUME (ft³/lb): 6.7

APPEARANCE AND COLOR: Colorless gas with the unpleasant odor of burning coal. The liquid is also colorless and has the same unpleasant odor of burning coal.

HOW TO DETECT THIS SUBSTANCE (warning properties): There are no distinct warning properties. In terms of leak detection, fittings and joints can be painted with a soap solution to detect leaks, which will be indicated by a bubble formation.

10. STABILITY and REACTIVITY

STABILITY: Stable.

DECOMPOSITION PRODUCTS: When ignited in the presence of oxygen, this gas will burn to produce carbon monoxide and carbon dioxide.

MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Strong oxidizers (e.g., chlorine, bromine pentafluoride, oxygen, oxygen difluoride, and nitrogen trifluoride).

HAZARDOUS POLYMERIZATION: Will not occur.

CONDITIONS TO AVOID: Contact with incompatible materials and exposure to heat, sparks, and other sources of ignition. Cylinders exposed to high temperatures or direct flame can rupture or burst.

PART IV *Is there any other useful information about this material?*

11. TOXICOLOGICAL INFORMATION

TOXICITY DATA: The following information is for pure Isobutylene.

ISOBUTYLENE:

LC₅₀ (rat, inhalation) = 620 g/m³/4 hours

LC₅₀ (mouse, inhalation) = 415 g/m³/2 hours

SUSPECTED CANCER AGENT: Isobutylene is not found on the following lists: FEDERAL OSHA Z LIST, NTP, IARC, CAL/OSHA, and therefore is neither considered to be nor suspected to be a cancer-causing agent by these agencies.

IRRITANCY OF PRODUCT: Isobutylene may be mildly irritating to the mucous membranes. In addition, contact with rapidly expanding gases can cause frostbite to exposed tissue.

SENSITIZATION TO THE PRODUCT: Isobutylene is not known to cause sensitization in humans.

REPRODUCTIVE TOXICITY INFORMATION: Listed below is information concerning the effects of Isobutylene on the human reproductive system.

Mutagenicity: No mutagenic effects have been described for Isobutylene.

Embryotoxicity: No embryotoxic effects have been described for Isobutylene.

Teratogenicity: No teratogenic effects have been described for Isobutylene.

Reproductive Toxicity: No reproductive toxicity effects have been described for Isobutylene.

A mutagen is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate through generational lines. An embryotoxin is a chemical which causes damage to a developing embryo (i.e., within the first eight weeks of pregnancy in humans), but the damage does not propagate across generational lines. A teratogen is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A reproductive toxin is any substance which interferes in any way with the reproductive process.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Acute or chronic respiratory conditions may be aggravated by overexposure to Isobutylene.

11. TOXICOLOGICAL INFORMATION (Continued)

RECOMMENDATIONS TO PHYSICIANS: Administer oxygen, if necessary. Treat symptoms and eliminate exposure.

BIOLOGICAL EXPOSURE INDICES (BEIs): Currently, Biological Exposure Indices (BEIs) are not applicable for Isobutylene.

12. ECOLOGICAL INFORMATION

ENVIRONMENTAL STABILITY: This gas will be dissipated rapidly in well-ventilated areas.

EFFECT OF MATERIAL ON PLANTS or ANIMALS: Any adverse effect on animals would be related to oxygen-deficient environments. No adverse effect is anticipated to occur to plant life, except for frost produced in the presence of rapidly expanding gases. See Section 11, Toxicological Information, for additional information on effects on animals.

EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on the effects of Isobutylene on aquatic life.

13. DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL: Waste disposal must be in accordance with appropriate Federal, State, and local regulations. Return cylinders with any residual product to MESA Specialty Gases & Equipment. Do not dispose of locally.

14. TRANSPORTATION INFORMATION

THIS MATERIAL IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

For Isobutylene Gas:

<u>PROPER SHIPPING NAME:</u>	Isobutylene
<u>HAZARD CLASS NUMBER and DESCRIPTION:</u>	2.1 (Flammable Gas)
<u>UN IDENTIFICATION NUMBER:</u>	UN 1055
<u>PACKING GROUP:</u>	Not Applicable
<u>DOT LABEL(S) REQUIRED:</u>	Flammable Gas
<u>NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (1996):</u> 115	

Alternate Description:

<u>PROPER SHIPPING NAME:</u>	Petroleum gases, liquefied
<u>HAZARD CLASS NUMBER and DESCRIPTION:</u>	2.1 (Flammable Gas)
<u>UN IDENTIFICATION NUMBER:</u>	UN 1075
<u>PACKING GROUP:</u>	Not Applicable
<u>DOT LABEL(S) REQUIRED:</u>	Flammable Gas
<u>NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (1996):</u> 115	

MARINE POLLUTANT: Isobutylene is not classified by the DOT as a Marine Pollutant (as defined by 49 CFR 172.101, Appendix B).

TRANSPORT CANADA TRANSPORTATION OF DANGEROUS GOODS REGULATIONS: THIS MATERIAL IS CONSIDERED AS DANGEROUS GOODS. Use the above information for the preparation of Canadian Shipments.

15. REGULATORY INFORMATION

U.S. SARA REPORTING REQUIREMENTS: Isobutylene is not subject to the reporting requirements of Sections 302, 304, and 313 of Title III of the Superfund Amendments and Reauthorization Act.

U.S. SARA THRESHOLD PLANNING QUANTITY: Not applicable.

U.S. CERCLA REPORTABLE QUANTITY (RQ): Not applicable.

CANADIAN DSL/NDL INVENTORY STATUS: Isobutylene is on the DSL Inventory.

U.S. TSCA INVENTORY STATUS: Isobutylene is listed on the TSCA Inventory.

15. REGULATORY INFORMATION (Continued)

OTHER U.S. FEDERAL REGULATIONS: Isobutylene is subject to the reporting requirements of Section 112(r) of the Clean Air Act. The Threshold Quantity for this gas is 10,000 lb. Depending on specific operations involving the use of Isobutylene, the regulations of the Process Safety Management of Highly Hazardous Chemicals may be applicable (29 CFR 1910.119). Under this regulation Isobutylene is not listed in Appendix A; however, any process that involves a flammable gas on-site, in one location, in quantities of 10,000 lb (4,553 kg) or greater is covered under this regulation unless it is used as a fuel.

U.S. STATE REGULATORY INFORMATION: Isobutylene is covered under specific State regulations, as denoted below:

Alaska - Designated Toxic and Hazardous Substances: Liquefied Petroleum Gas.

California - Permissible Exposure Limits for Chemical Contaminants: Liquefied Petroleum Gas.

Florida - Substance List: Isobutylene.

Illinois - Toxic Substance List: No.

Kansas - Section 302/313 List: No.

Massachusetts - Substance List: Isobutylene.

Michigan - Critical Materials Register: No.

Minnesota - List of Hazardous Substances: Liquefied Petroleum Gas.

Missouri - Employer Information/Toxic Substance List: No.

New Jersey - Right to Know Hazardous Substance List: Isobutylene.

North Dakota - List of Hazardous Chemicals, Reportable Quantities: No.

Pennsylvania - Hazardous Substance List: Isobutylene.

Rhode Island - Hazardous Substance List: Liquefied Petroleum Gas.

Texas - Hazardous Substance List: Liquefied Petroleum Gas.

West Virginia - Hazardous Substance List: Liquefied Petroleum Gas.

Wisconsin - Toxic and Hazardous Substances: Liquefied Petroleum Gas.

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): Isobutylene is not on the California Proposition 65 lists.

LABELING:

DANGER:

FLAMMABLE LIQUID AND GAS UNDER PRESSURE.
CAN FORM EXPLOSIVE MIXTURES WITH AIR.
MAY CAUSE FROSTBITE.

Keep away from heat, flames, and sparks.

Store and use with adequate ventilation.

Cylinder temperature should not exceed 52°C (125°F).

Do not get liquid in eyes, on skin, or clothing.

Close valve after each use and when empty.

Use in accordance with the Material Safety Data Sheet.

FIRST AID:

IF INHALED, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Call a physician.


IN CASE OF FROSTBITE, obtain immediate medical attention.

DO NOT REMOVE THIS PRODUCT LABEL.

CANADIAN WHMIS SYMBOLS:

Class A: Compressed Gas

Class B1: Flammable Gas



16. OTHER INFORMATION

The information contained herein is based on data considered accurate. However, no warranty is expressed or implied regarding the accuracy of these data or the results to be obtained from the use thereof. MESA Specialty Gases & Equipment assumes no responsibility for injury to the vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, MESA Specialty Gases & Equipment assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in his use of the material.

DEFINITIONS OF TERMS

A large number of abbreviations and acronyms appear on a MSDS. Some of these which are commonly used include the following:

CAS #: This is the Chemical Abstract Service Number which uniquely identifies each constituent. It is used for computer-related searching.

EXPOSURE LIMITS IN AIR:

ACGIH - American Conference of Governmental Industrial Hygienists, a professional association which establishes exposure limits. **TLV** - Threshold Limit Value - an airborne concentration of a substance which represents conditions under which it is generally believed that nearly all workers may be repeatedly exposed without adverse effect. The duration must be considered, including the 8-hour Time Weighted Average (TWA), the 15-minute Short Term Exposure Limit, and the instantaneous Ceiling Level (C). Skin absorption effects must also be considered.

OSHA - U.S. Occupational Safety and Health Administration. **PEL** - Permissible Exposure Limit - This exposure value means exactly the same as a TLV, except that it is enforceable by OSHA. The OSHA Permissible Exposure Limits are based in the 1989 PELs and the June, 1993 Air Contaminants Rule (Federal Register: 58: 35338-35351 and 58: 40191). Both the current PELs and the vacated PELs are indicated. The phrase, "Vacated 1989 PEL," is placed next to the PEL which was vacated by Court Order.

IDLH - Immediately Dangerous to Life and Health - This level represents a concentration from which one can escape within 30-minutes without suffering escape-preventing or permanent injury. The **DFG** - MAK is the Republic of Germany's Maximum Exposure Level, similar to the U.S. PEL. **NIOSH** is the National Institute of Occupational Safety and Health, which is the research arm of the U.S. Occupational Safety and Health Administration (**OSHA**). NIOSH issues exposure guidelines called Recommended Exposure Levels (RELs). When no exposure guidelines are established, an entry of NE is made for reference.

HAZARD RATINGS:

HAZARDOUS MATERIALS IDENTIFICATION SYSTEM: Health Hazard: 0 (minimal acute or chronic exposure hazard); 1 (slight acute or chronic exposure hazard); 2 (moderate acute or significant chronic exposure hazard); 3 (severe acute exposure hazard; onetime overexposure can result in permanent injury and may be fatal); 4 (extreme acute exposure hazard; onetime overexposure can be fatal). Flammability Hazard: 0 (minimal hazard); 1 (materials that require substantial pre-heating before burning); 2 (combustible liquid or solids; liquids with a flash point of 38-93°C [100-200°F]); 3 (Class IB and IC flammable liquids with flash points below 38°C [100°F]); 4 (Class IA flammable liquids with flash points below 23°C [73°F] and boiling points below 38°C [100°F]). Reactivity Hazard: 0 (normally stable); 1 (material that can become unstable at elevated temperatures or which can react slightly with water); 2 (materials that are unstable but do not detonate or which can react violently with water); 3 (materials that can detonate when initiated or which can react explosively with water); 4 (materials that can detonate at normal temperatures or pressures).

NATIONAL FIRE PROTECTION ASSOCIATION: Health Hazard: 0 (material that on exposure under fire conditions would offer no hazard beyond that of ordinary combustible materials); 1 (materials that on exposure under fire conditions could cause irritation or minor residual injury); 2 (materials that on intense or continued exposure under fire conditions could cause temporary incapacitation or possible residual injury); 3 (materials that can on short exposure could cause serious temporary or residual injury); 4 (materials that under very short exposure causes death or major residual injury).

NATIONAL FIRE PROTECTION ASSOCIATION (Continued): Flammability Hazard and Reactivity Hazard: Refer to definitions for "Hazardous Materials Identification System".

FLAMMABILITY LIMITS IN AIR:

Much of the information related to fire and explosion is derived from the National Fire Protection Association (NFPA). Flash Point - Minimum temperature at which a liquid gives off sufficient vapors to form an ignitable mixture with air. Autoignition Temperature: The minimum temperature required to initiate combustion in air with no other source of ignition. LEL - the lowest percent of vapor in air, by volume, that will explode or ignite in the presence of an ignition source. UEL - the highest percent of vapor in air, by volume, that will explode or ignite in the presence of an ignition source.

TOXICOLOGICAL INFORMATION:

Possible health hazards as derived from human data, animal studies, or from the results of studies with similar compounds are presented. Definitions of some terms used in this section are: **LD₅₀** - Lethal Dose (solids & liquids) which kills 50% of the exposed animals; **LC₅₀** - Lethal Concentration (gases) which kills 50% of the exposed animals; **ppm** concentration expressed in parts of material per million parts of air or water; **mg/m³** concentration expressed in weight of substance per volume of air; **mg/kg** quantity of material, by weight, administered to a test subject, based on their body weight in kg. Data from several sources are used to evaluate the cancer-causing potential of the material. The sources are: **IARC** - the International Agency for Research on Cancer; **NTP** - the National Toxicology Program, **RTECS** - the Registry of Toxic Effects of Chemical Substances, **OSHA** and **CAL/OSHA**. **IARC** and **NTP** rate chemicals on a scale of decreasing potential to cause human cancer with rankings from 1 to 4. Subrankings (2A, 2B, etc.) are also used. Other measures of toxicity include **TDLo**, the lowest dose to cause a symptom and **TCLo** the lowest concentration to cause a symptom; **TD₀**, **LDLo**, and **LD₀**, or **TC**, **TC₀**, **LCLo**, and **LCo**, the lowest dose (or concentration) to cause lethal or toxic effects. **BEI** - Biological Exposure Indices, represent the levels of determinants which are most likely to be observed in specimens collected from a healthy worker who has been exposed to chemicals to the same extent as a worker with inhalation exposure to the TLV. Ecological Information: **EC** is the effect concentration in water.

REGULATORY INFORMATION:

This section explains the impact of various laws and regulations on the material. **EPA** is the U.S. Environmental Protection Agency. **WHMIS** is the Canadian Workplace Hazardous Materials Information System. **DOT** and **TC** are the U.S. Department of Transportation and the Transport Canada, respectively. Superfund Amendments and Reauthorization Act (**SARA**); the Canadian Domestic/Non-Domestic Substances List (**DSL/NDSL**); the U.S. Toxic Substance Control Act (**TSCA**); Marine Pollutant status according to the **DOT**; the Comprehensive Environmental Response, Compensation, and Liability Act (**CERCLA** or **Superfund**); and various state regulations.

MATERIAL SAFETY
DATA SHEET

Prepared to U.S. OSHA, CMA, ANSI and Canadian WHMIS Standards

1. PRODUCT IDENTIFICATION

CHEMICAL NAME; CLASS: NON-FLAMMABLE GAS MIXTURE

Containing One or More of the Following Components in a Nitrogen Balance Gas:

Oxygen, 0.0015-23.5%; Propane, 0-1.1%; n-Pentane, 0-0.75%; n-Hexane; 0-0.48%;

Carbon Monoxide, 0.0005-1.0%; Hydrogen Sulfide, 0.001-0.025%

NOTE: MIXTURES COMPRISED OF AN AIR BALANCE GAS CONTAIN BETWEEN 19.5-23.5% OXYGEN.

SYNONYMS: Not Applicable

CHEMICAL FAMILY NAME: Not Applicable

FORMULA: Not Applicable

Document Number: 50016 (Replaces ISC MSDS No.1810-2187, 1810-2343, 1810-3366, 1810-3937
1810-7219, 1810-7599, 1810-6179)

Note: The Material Safety Data Sheet is for this gas mixture supplied in cylinders with 33 cubic feet (935 liters) or less gas capacity (DOT - 39 cylinders). This MSDS has been developed for various gas mixtures with the composition of components within the ranges listed in Section 2 (Composition and Information on Ingredients). Refer to the product label for information on the actual composition of the product.

PRODUCT USE:	Calibration of Monitoring and Research Equipment
SUPPLIER/MANUFACTURER'S NAME:	CALGAZ
ADDRESS:	821 Chesapeake Drive Cambridge, MD 21613
EMERGENCY PHONE:	CHEMTREC: 1-800-424-9300
BUSINESS PHONE:	1-410-228-6400
	General MSDS Information 1-713/868-0440
	Fax on Demand: 1-800/231-1366

2. COMPOSITION and INFORMATION ON INGREDIENTS

CHEMICAL NAME	CAS #	mole %	EXPOSURE LIMITS IN AIR					
			ACGIHTLV		OSHA		IDLH	OTHER
			TWA ppm	STEL ppm	TWA ppm	STEL ppm		
Oxygen	7782-44-7	0.0015 - 23.5%	There are no specific exposure limits for Oxygen. Oxygen levels should be maintained above 19.5%.					
Propane	74-98-6	0 - 1.1%	2500	NE	1000	NE	2100	NIOSH REL: 1000 DFG MAK: 1000 ppm
n-Pentane	109-66-0	0 - 0.75%	600	750	1000 600 (Vacated 1989 PEL)	750 (Vacated 1989 PEL)	1500	NIOSH REL: TWA = 120 STEL = 610 (ceiling) 15 minutes DFG MAKs: TWA =1000 PEAK = 2•MAK, 60 min., momentary value
n-Hexane	110-54-3	0 - 0.48%	50	NE	500 50 (Vacated 1989 PEL)	NE	1100	NIOSH REL: 50 DFG MAK: 50
Hydrogen Sulfide	7783-06-4	0.001- 0.025 %	10 NIC = 5	15 NIC = 5	10 (Vacated 1989 PEL)	20 (ceiling), 50 (10 min. peak, once per shift) 15 (Vacated 1989 PEL)	100	NIOSH REL: STEL = 10 (ceiling), 10 minutes DFG MAKs: TWA = 10 PEAK = 2•MAK, 10 min., momentary value
Carbon Monoxide	630-08-0	0.0005 - 1.0%	25	NE	50 35 (Vacated 1989 PEL)	200 (ceiling) (Vacated 1989 PEL)	1200	NIOSH RELs: TWA = 35 STEL = 200 ceiling DFG MAKs: TWA = 30 PEAK = 2•MAK, 15 min., average value, 1 hr interval DFG MAK Pregnancy Risk Classification: B
Nitrogen	7727-37-9	Balance	There are no specific exposure limits for Nitrogen. Nitrogen is a simple asphyxiant (SA). Oxygen levels should be maintained above 19.5%.					

NE = Not Established.

NIC = Notice of Intended Change

See Section 16 for Definitions of Terms Used.

NOTE: ALL WHMIS required information is included in appropriate sections based on the ANSI Z400.1-1998 format. This gas mixture has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

3. HAZARD IDENTIFICATION

EMERGENCY OVERVIEW: This gas mixture is a colorless gas which has a rotten-egg odor (due to the presence of Hydrogen Sulfide). The odor cannot be relied on as an adequate warning of the presence of this gas mixture, because olfactory fatigue occurs after over-exposure to Hydrogen Sulfide. Hydrogen Sulfide and Carbon Monoxide (another component of this gas mixture) are toxic to humans in relatively low concentrations. Over-exposure to this gas mixture can cause skin or eye irritation, nausea, dizziness, headaches, collapse, unconsciousness, coma, and death. The Propane, n-Pentane, and n-Hexane components can cause anesthetic or peripheral neuropathy effects. Additionally, releases of this gas mixture may produce oxygen-deficient atmospheres (especially in small confined spaces or other poorly-ventilated environments); individuals in such atmospheres may be asphyxiated.

SYMPTOMS OF OVER-EXPOSURE BY ROUTE OF EXPOSURE: The most significant route of over-exposure for this gas mixture is by inhalation.

INHALATION: Due to the small size of an individual cylinder of this gas mixture, no unusual health effects from over-exposure to the product are anticipated under routine circumstances of use. A significant health hazard associated with this gas mixture is the potential of inhalation of Hydrogen Sulfide, a component of this gas mixture. Such over-exposures may occur if this gas mixture is used in a confined space or other poorly-ventilated area. Over-exposures to Hydrogen Sulfide can cause dizziness, headache, and nausea. Exposure to this component can result in respiratory arrest, coma, or unconsciousness. Continuous inhalation of low concentrations of Hydrogen Sulfide may cause olfactory fatigue, so that the odor is no longer an effective warning of the presence of this gas. A summary of exposure concentrations and observed effects are as follows

CONCENTRATION OF HYDROGEN SULFIDE

0.3-30 ppm
50 ppm
Slightly higher than 50 ppm
100-150 ppm
200-250 ppm

300-500
500 ppm

OBSERVED EFFECT

Odor is obvious and unpleasant.
Eye irritation. Dryness and irritation of nose, throat.
Irritation of the respiratory system.
Temporary loss of smell.
Headache, vomiting nausea. Prolonged exposure may lead to lung damage. Exposures of 4-8 hours can be fatal.
Swifter onset of symptoms. Death occurs in 1-4 hours.
Headache, excitement, staggering, and stomach ache after brief exposure. Death occurs within 0.5 - 1 hour of exposure.
Rapid onset of unconsciousness, coma, death.
Immediate respiratory arrest.
This gas mixture contains a maximum of 250 ppm Hydrogen

Sulfide. The higher concentration values here are presented to delineate the complete health effects which have been observed for humans after exposure to Hydrogen Sulfide.

Inhalation over-exposures to atmospheres containing more than the Threshold Limit Value of Carbon Monoxide (25 ppm), another component of this gas mixture, can result in serious health consequences. Carbon Monoxide is classified as a chemical asphyxiant, producing a toxic action by combining with the hemoglobin of the blood and replacing the available oxygen. Through this replacement, the body is deprived of the required oxygen, and asphyxiation occurs.

Since the affinity of Carbon Monoxide for hemoglobin is about 200-300 times that of oxygen, only a small amount of Carbon Monoxide will cause a toxic reaction to occur. Carbon Monoxide exposures in excess of 50 ppm will produce symptoms of poisoning if breathed for a sufficiently long time. If this gas mixture is released in a small, poorly ventilated area (i.e. an enclosed or confined space), symptoms which may develop include the following:

CONCENTRATION OF CARBON MONOXIDE

All exposure levels: ..
200 ppm:
400 ppm:
1,000 -2000 ppm:
200-2500 ppm:
> 2500 ppm:

OBSERVED EFFECT

Over-exposure to Carbon Monoxide can be indicated by the lips and fingernails turning bright red.
Slight symptoms (i.e. headache) after several hours of exposure.
Headache and discomfort experienced within 2-3 hours of exposure.
Within 30 minutes, slight palpitations of the heart occurs. Within 1.5 hours, there is a tendency to stagger.
Within 2 hours, there is mental confusion, headaches, and nausea. Unconsciousness within 30 minutes.
Potential for collapse and death before warning symptoms.

Another hazard associated with this gas mixture is the potential for anesthetic and peripheral neuropathy effects after inhalation over-exposures to the Propane, n-Pentane and n-Hexane components of this gas mixture. Specific human over-exposure data are available for n-Pentane and n-Hexane, as follows:

CONCENTRATION OF n-PENTANE

Brief (10 minute) up to 5,000 ppm:
Higher than 5,000 ppm:
Long term:

OBSERVED EFFECT

No symptoms.
Exhilaration, dizziness and headache can occur.
Can cause chronic neurological disorder causing damage to the nerves in the hands and feet (peripheral neuropathy)

CONCENTRATION OF n-HEXANE

Brief (10 minute) at 1,500 ppm:
5000 ppm:
Long term at 500 ppm:

OBSERVED EFFECT

Irritation of the respiratory tract, nausea and headache.
Dizziness and drowsiness can occur.
Can affect the nerves in the arms and legs. Effects include numbing or tingling sensations in the fingers and toes, tiredness, muscle weakness, cramps and spasms in the leg, difficulty in holding objects or walking, abdominal pains, loss of appetite, weight loss. More serious exposures can cause damage to the nerves in the hands and feet (peripheral neuropathy).
Abnormal color perception and pigment changes in the eyes have been reported among industrial workers exposed to 423-1280 ppm for 5 years or more.
Mild forms of anemia have also been associated with exposure to hexane. These are of temporary nature.

Eyes and Vision:

Blood Cells:

Additionally, if mixtures of this gas mixture contain less than 19.5% Oxygen and are released in a small, poorly ventilated area (i.e. an enclosed or confined space), an oxygen-deficient environment may occur. Individuals breathing such an atmosphere may experience symptoms which include headaches, ringing in ears, dizziness, drowsiness, unconsciousness, nausea, vomiting, and depression of all the senses. Under some circumstances of over-exposure, death may occur. The following effects associated with various levels of oxygen are as follows:

CONCENTRATION OF OXYGEN

12-16% Oxygen:
10-14% Oxygen:
6-10% Oxygen:
Below 6%:

OBSERVED EFFECT

Breathing and pulse rate increased, muscular coordination slightly disturbed.
Emotional upset, abnormal fatigue, disturbed respiration.
Nausea, vomiting, collapse, or loss of consciousness.
Convulsive movements, possible respiratory collapse, and death.

SKIN and EYE CONTACT: The Hydrogen Sulfide component of this gas mixture may be irritating to the skin. Inflammation and irritation of the eyes can occur at very low airborne concentration of Hydrogen Sulfide (less than 10 ppm). Exposure over several hours may result in “gas eyes” or “sore eyes” with symptoms of scratchiness, irritation, tearing and burning. Above 50 ppm of Hydrogen Sulfide, there is an intense tearing, blurring of vision, and pain when looking at light. Over-exposed individuals may see rings around bright lights. Most symptoms disappear when exposure ceases. However, in serious cases, the eye can be permanently damaged.

HEALTH EFFECTS OR RISKS FROM EXPOSURE: An Explanation in Lay Terms. Over-exposure to this gas mixture may cause the following health effects:

ACUTE: Due to the small size of the individual cylinder of this gas mixture, no unusual health effects from exposure to the product are anticipated under routine circumstances of use. However, the Hydrogen Sulfide and Carbon Monoxide components of this gas mixture are toxic to humans. Over-exposure to this gas mixture can cause nausea, dizziness, headaches, collapse, unconsciousness, coma, and death. Due to the presence of Hydrogen Sulfide, over-exposures to this gas mixture can also irritate the skin and eyes; severe eye contamination can result in blindness. Inhalation over-exposures to Propane, n-Pentane, and n-Hexane can cause anesthetic effects and motor neuropathy (i.e. pain and tingling in feet and hands).

HAZARDOUS MATERIAL IDENTIFICATION SYSTEM			
HEALTH HAZARD	(BLUE)	3	
FLAMMABILITY HAZARD	(RED)	0	
PHYSICAL HAZARD	(YELLOW)	0	
PROTECTIVE EQUIPMENT			
EYES	RESPIRATORY	HANDS	BODY
See Section 8			
For Routine Industrial Use and Handling Applications			

3. HAZARD IDENTIFICATION (Continued)

CHRONIC: Abnormal color perception and pigment changes in the eyes have been reported among persons exposed to 420 -1300 ppm of n-Hexane for five years. Additionally, long-term exposure to low levels of n-Hexane or n-Pentane can affect the nerves in the arms and legs. Effects include numbing or tingling sensation, tiredness, cramps, spasms in legs, difficulty holding objects or walking, loss of appetite and weight loss. Pentane isomers, such as n-Pentane, and Propane can cause sensitization of the heart to epinephrine. Refer to Section 11 (Toxicology Information) for additional information on the components of this gas mixture.

TARGET ORGANS: ACUTE: Respiratory system, blood system, central nervous system, cardiovascular system. CHRONIC: Reproductive system, cardiovascular system.

4. FIRST-AID MEASURES

RESCUERS SHOULD NOT ATTEMPT TO RETRIEVE VICTIMS OF EXPOSURE TO THIS GAS MIXTURE WITHOUT ADEQUATE PERSONAL PROTECTIVE EQUIPMENT. At a minimum, Self-Contained Breathing Apparatus must be worn.

No unusual health effects are anticipated after exposure to this gas mixture, due to the small cylinder size. If any adverse symptom develops after over-exposure to this gas mixture, remove victim(s) to fresh air as quickly as possible. Only trained personnel should administer supplemental oxygen and/or cardio-pulmonary resuscitation if necessary.

Victim(s) who experience any adverse effect after over-exposure to this gas mixture must be taken for medical attention. Rescuers should be taken for medical attention if necessary. Take a copy of the label and the MSDS to physician or other health professional with victim(s).

SKIN EXPOSURE: If irritation of the skin develops after exposure to this gas mixture, immediately begin decontamination with running water. Minimum flushing is for 15 minutes. Remove exposed or contaminated clothing, taking care not to contaminate eyes. Victim must seek immediate medical attention.

EYE EXPOSURE: If irritation of the eye develops after exposure to this gas mixture, open victim's eyes while under gentle running water. Use sufficient force to open eyelids. Have victim "roll" eyes. Minimum flushing is for 15 minutes. Seek medical assistance immediately, preferably an ophthalmologist.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Pre-existing respiratory conditions may be aggravated by over-exposure to this gas mixture. Carbon Monoxide, a component of this gas mixture, can aggravate some diseases of the cardiovascular system, such as coronary artery disease and angina pectoris. Because of the presence of Hydrogen Sulfide, n-Hexane or n-Pentane in this gas mixture, central nervous system conditions, eye disorders, or skin problems may be aggravated by over-exposure to this gas mixture.

RECOMMENDATIONS TO PHYSICIANS: Treat symptoms and eliminate over-exposure. Hyperbaric oxygen is the most efficient antidote to Carbon Monoxide poisoning, the optimum range being 2-2.5 atm. A special mask, or, preferably, a compression chamber to utilize oxygen at these pressures is required. Avoid administering stimulant drugs. Be observant for initial signs of pulmonary edema in the event of severe inhalation over-exposures.

5. FIRE-FIGHTING MEASURES

FLASH POINT: Not applicable.

AUTOIGNITION TEMPERATURE: Not applicable.

FLAMMABLE LIMITS (in air by volume, %):

Lower (LEL): Not applicable.

Upper (UEL): Not applicable.


FIRE EXTINGUISHING MATERIALS: Non-flammable gas mixture. Use extinguishing media appropriate for surrounding fire.

UNUSUAL FIRE AND EXPLOSION HAZARDS: This gas mixture contains toxic gases, Hydrogen Sulfide and Carbon Monoxide, and presents an extreme health hazard to firefighters. This gas mixture is not flammable; however, containers, when involved in fire, may rupture or burst in the heat of the fire.

Explosion Sensitivity to Mechanical Impact: Not Sensitive.

Explosion Sensitivity to Static Discharge: Not Sensitive.

SPECIAL FIRE-FIGHTING PROCEDURES: Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment.

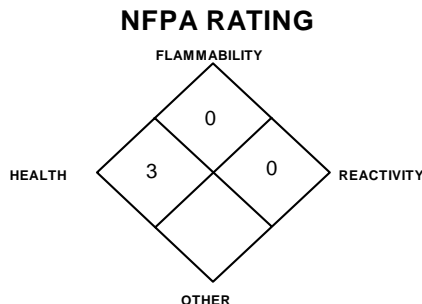

6. ACCIDENTAL RELEASE MEASURES

LEAK RESPONSE: Due to the small size and content of the cylinder, an accidental release of this gas mixture presents significantly less risk of over-exposure to Hydrogen Sulfide and Carbon Monoxide, the toxic components of this gas mixture, and other safety hazards related to the remaining components of this gas mixture, than a similar release from a larger cylinder. However, as with any chemical release, extreme caution must be used during emergency response procedures. In the event of a release in which the atmosphere is unknown, and in which other chemicals are potentially involved, evacuate immediate area. Such releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a leak, clear the affected area, protect people, and respond with trained personnel.

For emergency disposal, secure the cylinder and slowly discharge the gas to the atmosphere in a well-ventilated area or outdoors. Allow the gas mixture to dissipate. If necessary, monitor the surrounding area (and the original area of the release) for Hydrogen Sulfide, Carbon Monoxide, and Oxygen. Hydrogen Sulfide and Carbon Monoxide level must be below exposure level listed in Section 2 (Composition and Information on Ingredients) and Oxygen levels must be above 19.5% before non-emergency personnel are allowed to re-enter area.

If leaking incidentally from the cylinder, contact your supplier.

7. HANDLING and USE

WORK PRACTICES AND HYGIENE PRACTICES: Be aware of any signs of dizziness or fatigue; exposures to fatal concentrations of this gas mixture could occur without any significant warning symptoms, due to olfactory fatigue or oxygen deficiency. Do not attempt to repair, adjust, or in any other way modify cylinders containing a gas mixture with Hydrogen Sulfide or Carbon Monoxide. If there is a malfunction or another type of operational problem, contact nearest distributor immediately. Eye wash stations/safety showers should be near areas where this gas mixture is used or stored. All work operations should be monitored in such a way that emergency personnel can be immediately contacted in the event of a release. All work practices should minimize releases of Hydrogen Sulfide and Carbon Monoxide-containing gas mixtures.

STORAGE AND HANDLING PRACTICES: Cylinders should be firmly secured to prevent falling or being knocked-over. Cylinders must be protected from the environment, and preferably kept at room temperature (approximately 21°C, 70°F). Cylinders should be stored in dry, well-ventilated areas, away from sources of heat, ignition, and direct sunlight. Protect cylinders against physical damage.

Full and empty cylinders should be segregated. Use a first-in, first-out inventory system to prevent full containers from being stored for long periods of time. These cylinders are not refillable. **WARNING! Do not refill DOT 39 cylinders. To do so may cause personal injury or property damage.**

SPECIAL PRECAUTIONS FOR HANDLING GAS CYLINDERS: **WARNING!** Compressed gases can present significant safety hazards. During cylinder use, use equipment designed for these specific cylinders. Ensure all lines and equipment are rated for proper service pressure.

PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT: Follow practices indicated in Section 6 (Accidental Release Measures). Make certain that application equipment is locked and tagged-out safely. Always use product in areas where adequate ventilation is provided.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

VENTILATION AND ENGINEERING CONTROLS: No special ventilation systems or engineering controls are needed under normal circumstances of use. As with all chemicals, use this gas mixture in well-ventilated areas. If this gas mixture is used in a poorly-ventilated area, install automatic monitoring equipment to detect the levels of Oxygen, Hydrogen Sulfide, and Carbon Monoxide.

RESPIRATORY PROTECTION: No special respiratory protection is required under normal circumstances of use. Use supplied air respiratory protection if Carbon Monoxide levels exceed the exposure levels given in Section 2 (Composition and Information on Ingredients) or if oxygen levels are below 19.5%, or if either level is unknown during emergency response to a release of this gas mixture. If respiratory protection is required for emergency response to this gas mixture, follow the requirements of the Federal OSHA Respiratory Protection Standard (29 CFR 1910.134) or equivalent State standards. The following NIOSH respiratory protection recommendations for Hydrogen Sulfide and Carbon Monoxide are provided for further information.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION (Continued)

NIOSH/OSHA RECOMMENDATIONS FOR HYDROGEN SULFIDE CONCENTRATIONS IN AIR:
Up to 100 ppm: Powered air-purifying respirator with cartridge(s) to protect against hydrogen sulfide; or gas mask with canister to protect against hydrogen sulfide; or SAR; or full-facepiece SCBA.
Emergency or Planned Entry into Unknown Concentration or IDLH Conditions: Positive pressure, full-facepiece SCBA; or positive pressure, full-facepiece SAR with an auxiliary positive pressure SCBA.
Escape: Gas mask with canister to protect against hydrogen sulfide; or escape-type SCBA
NOTE: The IDLH concentration for Hydrogen Sulfide is 100 ppm.

NIOSH/OSHA RECOMMENDATIONS FOR CARBON MONOXIDE CONCENTRATIONS IN AIR:
Up to 350 ppm Supplied Air Respirator (SAR)
Up to 875 ppm Supplied Air Respirator (SAR) operated in a continuous flow mode.
Up to 1200 ppm Gas mask with canister to protect against carbon monoxide; or full-facepiece SCBA; or full-facepiece Supplied Air Respirator (SAR).
Emergency or Planned Entry into Unknown Concentration or IDLH Conditions: Positive pressure, full-facepiece SCBA; or positive pressure, full-facepiece Supplied Air Respirator (SAR) with an auxiliary positive pressure SCBA.
Escape: Gas mask with canister to protect against carbon monoxide; or escape-type SCBA.
NOTE: End of Service Life Indicator (ESLI) required for gas masks.

EYE PROTECTION: Safety glasses. If necessary, refer to U.S. OSHA 29 CFR 1910.133 or appropriate Canadian Standards.
HAND PROTECTION: No special protection is needed under normal circumstances of use. If necessary, refer to U.S. OSHA 29 CFR 1910.138 or appropriate Standards of Canada.
BODY PROTECTION: No special protection is needed under normal circumstances of use. If a hazard of injury to the feet exists due to falling objects, rolling objects, where objects may pierce the soles of the feet or where employee's feet may be exposed to electrical hazards, use foot protection, as described in U.S. OSHA 29 CFR 1910.136.

9. PHYSICAL and CHEMICAL PROPERTIES

The following information is for Nitrogen, the main component of this gas mixture.

GAS DENSITY @ 32°F (0°C) and 1 atm: 0.072 lbs/ ft ³ (1.153 kg/m ³)	BOILING POINT: -195.8°C (-320.4°F)
FREEZING/MELTING POINT @ 10 psig: -210°C (-345.8°F)	pH: Not applicable.
SPECIFIC GRAVITY (air = 1) @ 70°F (21.1°C): 0.906	MOLECULAR WEIGHT: 28.01
SOLUBILITY IN WATER vol/vol @ 32°F (0°C) and 1 atm: 0.023	EXPANSION RATIO: Not applicable.
EVAPORATION RATE (nBuAc = 1): Not applicable.	SPECIFIC VOLUME (ft³/lb): 13.8
ODOR THRESHOLD: Not applicable.	
VAPOR PRESSURE @ 70°F (21.1°C) psig: Not applicable.	
COEFFICIENT WATER/OIL DISTRIBUTION: Not applicable.	

The following information is for the gas mixture.

APPEARANCE AND COLOR: This gas mixture is a colorless gas which has an rotten egg-like odor, due to the presence of Hydrogen Sulfide.

HOW TO DETECT THIS SUBSTANCE (warning properties): Continuous inhalation of low concentrations of Hydrogen Sulfide (a component of this gas mixture) may cause olfactory fatigue, so that there are no distinct warning properties. In terms of leak detection, fittings and joints can be painted with a soap solution to detect leaks, which will be indicated by a bubble formation. Wet lead acetate paper can be used for leak detection. The paper turns black in the presence of Hydrogen Sulfide. Cadmium chloride solutions can also be used. Cadmium solutions will turn yellow upon contact with Hydrogen Sulfide.

10. STABILITY and REACTIVITY

STABILITY: Normally stable in gaseous state.

DECOMPOSITION PRODUCTS: The thermal decomposition products of Propane, n-Hexane, and n-Pentane include carbon oxides. The decomposition products of Hydrogen Sulfide include water and sulfur oxides. The other components of this gas mixture do not decompose, per se, but can react with other compounds in the heat of a fire.

MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Titanium will burn in Nitrogen (the main component of this gas mixture). Lithium reacts slowly with Nitrogen at ambient temperatures. Components of this gas mixture (Hydrogen Sulfide, Propane, n-Pentane, n-Hexane) are also incompatible with strong oxidizers (i.e. chlorine, bromine pentafluoride, oxygen, oxygen difluoride, and nitrogen trifluoride). Carbon Monoxide is mildly corrosive to nickel and iron (especially at high temperatures and pressures). Hydrogen Sulfide is corrosive to most metals, because it reacts with these substances to form metal sulfides.

HAZARDOUS POLYMERIZATION: Will not occur.

CONDITIONS TO AVOID: Contact with incompatible materials. Cylinders exposed to high temperatures or direct flame can rupture or burst.

11. TOXICOLOGICAL INFORMATION

TOXICITY DATA: The following toxicology data are available for the components of this gas mixture:

NITROGEN: There are no specific toxicology data for Nitrogen. Nitrogen is a simple asphyxiant, which acts to displace oxygen in the	n-HEXANE (continued):	CARBON MONOXIDE (continued):
n-PENTANE:	CHRONIC INHALATION (rat): 400-600 ppm, 5 days/week, peripheral neuropathy in 45 days; 850 ppm for 143 days, loss of weight and degeneration of the sciatic nerve. (mouse): 250 ppm, peripheral neuropathy within 7 months; no effects at 100 ppm.	TCLo (inhalation, human) = 600 mg/m ³ /10 minutes
LD ₅₀ (intravenous, mouse) = 446 mg/kg.		LCLo (inhalation, man) = 4000 ppm/30 minutes
LC ₅₀ (inhalation, rat) = 364 g/m ³ /4 hours		TCLo (inhalation, man) = 650 ppm/45 minutes: central nervous system and blood system effects.
LCLo (inhalation, mouse) = 325 g/m ³ /2 hours		LCLo (inhalation, human) = 5000 ppm/5 minutes
n-HEXANE:	PROPANE:	LCLo (inhalation, dog) = 4000 ppm/46 minutes
Eye, rabbit = 10 mg/ mild	Long-Term Inhalation: No toxicity or abnormalities were observed when monkeys were exposed to approximately 750 ppm for 90 days. Similar results were obtained when monkeys were exposed to an aerosol spray containing 65% propane and isobutane.	LCLo (inhalation, rabbit) = 4000 ppm
TCLo (inhalation, rat) = 10,000 ppm/7 hr.		LC₅₀ (inhalation, rat) = 1811 ppm/4 hours
TCLo (inhalation, rat) = 5000 ppm/20 hours; teratogenic effects	CARBON MONOXIDE:	LC₅₀ (inhalation, guinea pig) = 2450 ppm/4 hours
LD50 (oral, rat) = 28710 mg/kg	TCLo (inhalation, mouse) = 65 ppm/24 hours (7-18 preg): rep. effects	LC₅₀ (inhalation, guinea pig) = 5718 ppm/4 hours
LDLo (intraperitoneal, rat) = 9100 mg/kg	TCLo (inhalation, mouse) = 8 pph/1 hour (female 8D post): ter. effects	LCLo (inhalation, mammal) = 5000 ppm/5 minutes
LCLo (inhalation, mouse) = 120,000 mg/kg	HYDROGEN SULFIDE (continued):	LD₅₀ (inhalation, wild bird) = 1334 ppm
LD50 (rat, oral): 28,710 mg/kg	LCLo (inhalation, human) = 800 ppm/5 minutes	HYDROGEN SULFIDE (continued):
ACUTE INHALATION (mouse): 30,000 ppm, narcosis within 30 to 60 minutes; 35,000-40,000 ppm, convulsions and death.	LC₅₀ (inhalation, rat) = 444 ppm	LC₅₀ (inhalation, mouse) = 673 ppm/1 hour
DERMAL (rabbit): 2 to 5 ml/kg for 4 hours resulted in restlessness and discoordination,; death occurred at 5 ml/kg.		LCLo (inhalation, mammal) = 800 ppm/5 minutes
HYDROGEN SULFIDE:		
LCLo (inhalation, human) = 600 ppm/30 minutes		
LDLo (inhalation, man) = 5.7 mg/kg; central nervous system, pulmonary effects		

SUSPECTED CANCER AGENT: The components of this gas mixture are not found on the following lists: FEDERAL OSHA Z LIST, NTP, CAL/OSHA, and IARC; therefore, they are not considered to be, nor suspected to be, cancer-causing agents by these agencies.

IRRITANCY OF PRODUCT: The Hydrogen Sulfide component of this gas mixture, is irritating to the eyes, and may be irritating to the skin.

SENSITIZATION OF PRODUCT: The components of this gas mixture are not known to be skin or respiratory sensitizers. Pentane isomers (i.e. n-Pentane) and Propane can cause cardiac sensitization to epinephrine.

REPRODUCTIVE TOXICITY INFORMATION: Listed below is information concerning the effects of this gas mixture on the human reproductive system.

Mutagenicity: No mutagenicity effects have been described for the components of this gas mixture.

Embryotoxicity: This gas mixture contains components that may cause embryotoxic effects in humans; however, due to the small total amount of the components, embryotoxic effects are not expected to occur.

Teratogenicity: This gas mixture is not expected to cause teratogenic effects in humans due to the small cylinder size and small total amount of all components. The Carbon Monoxide component of this gas mixture which exists up to 1%, can cause teratogenic effects in humans. Severe

11. TOXICOLOGICAL INFORMATION (continued)

exposure to Carbon Monoxide during pregnancy has caused adverse effects and the death of the fetus. In general, maternal symptoms are an indicator of the potential risk to the fetus since Carbon Monoxide is toxic to the mother before it is toxic to the fetus.

Reproductive Toxicity: The components of this gas mixture are not expected to cause adverse reproductive effects in humans.

A *mutagen* is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate through generation lines. An *embryotoxin* is a chemical which causes damage to a developing embryo (i.e. within the first eight weeks of pregnancy in humans), but the damage does not propagate across generational lines. A *teratogen* is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A *reproductive toxin* is any substance which interferes in any way with the reproductive process.

BIOLOGICAL EXPOSURE INDICES (BEIs): Biological Exposure Indices (BEIs) have been determined for the components of this gas mixture, as follows:

CHEMICAL DETERMINANT	SAMPLING TIME	BEI
CARBON MONOXIDE <ul style="list-style-type: none">• Carboxyhemoglobin in blood• Carbon monoxide in end-exhaled air	<ul style="list-style-type: none">• End of shift• End of shift	<ul style="list-style-type: none">• 3.5% of hemoglobin• 20 ppm
n-HEXANE <ul style="list-style-type: none">• 2,5-Hexanedione in urine• n-Hexane in end-exhaled air	<ul style="list-style-type: none">• End of shift	<ul style="list-style-type: none">• 5 mg/g creatinine

12. ECOLOGICAL INFORMATION

ENVIRONMENTAL STABILITY: The gas will be dissipated rapidly in well-ventilated areas. The following environmental data are applicable to the components of this gas mixture.

OXYGEN: Water Solubility = 1 volume Oxygen/32 volumes water at 20°C. Log K_{ow} = -0.65

PROPANE: Log K_{ow} = 2.38. Water Solubility = 62.4 ppm, 25°C. Propane is readily degraded by soil bacteria.

PENTANE: Log K_{ow} = 3.39. Water Solubility = 38.5 mg/L. LOG BCF (n-pentane) = calculated, 1.90 and 2.35, respectively. Photolysis, hydrolysis, and bioconcentration are not anticipated to be important fate processes. Biodegradation and soil adsorption are anticipated to be more important processes for this compound.

n-HEXANE: Log K_{ow} = 3.90-4.11. Water Solubility = 9.5 mg/L. Estimated Bioconcentration Factor =2.24 and 2.89. Bioconcentration in aquatic organisms is low. Hexane is volatile. Rapid volatilization from water and soil is anticipated for this compound. Hexane will float in slick on surface of the water

HYDROGEN SULFIDE: Water Solubility = 1 g/242 mL at 20°C.

CARBON MONOXIDE: Water solubility = 3.3 ml/100 cc at 0 °C, 2.3 ml at 20°C.

NITROGEN: Water Solubility = 2.4 volumes Nitrogen/100 volumes water at 0°C; 1.6 volumes Nitrogen/100 volumes water at 20°C.

EFFECT OF MATERIAL ON PLANTS or ANIMALS: No evidence is currently available on this gas mixture's effects on plant and animal life. The Hydrogen Sulfide and Carbon Monoxide components of this gas mixture, can be deadly to exposed animal life, producing symptoms similar to those experienced by humans. This gas mixture may also be harmful to plant life.

EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on the effects of this gas effects on aquatic life. The presence of more than a trace of Carbon Monoxide is a hazard to fish. The following aquatic toxicity data are available for the Hydrogen Sulfide component of this gas mixture.

TLm (Asellussp) = 0.111 mg/L/96 hour	TLm (Lepomis macrochirus, bluegill sunfish) = 0.0448 mg/L/96 hour at 21-22 °C
TLm (Cranfgonyx sp) =1.07 mg/L/96 hour	
TLm (Gammarrus) = 0.84 mg/L/96 hour	TLm (Pimephlaes promelas, fathead minnow) = 0.0071-0.55 mg/L/96 hour
LC ₅₀ (fly inhalation) = 380 mg/m³/960 minutes	
LC ₅₀ (fly inhalation) = 1500 mg/m³/7 minutes	TLm (Salvenilis foninalis, brook trout) = 0.0216-0.038 mg/L/96 hour at 8-12.5 °C
TLm (Lepomis macrochirus, bluegill sunfish) = 0.0478 mg/L/96 hour	

13. DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL **PREPARING WASTES FOR DISPOSAL:** Waste disposal must be in accordance with appropriate Federal, State, and local regulations. Cylinders with undesired residual product may be safely vented outdoors with the proper regulator. For further information, refer to Section 16 (Other Information).

14. TRANSPORTATION INFORMATION

THIS GAS MIXTURE IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

PROPER SHIPPING NAME: Compressed gases, n.o.s. (*Oxygen, Nitrogen)*or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not Applicable

DOT LABEL(S) REQUIRED: Class 2.2 (Non-Flammable Gas)

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

MARINE POLLUTANT: The components of this gas mixture are not classified by the DOT as Marine Pollutants (as defined by 49 CFR 172.101, Appendix B).

SPECIAL SHIPPING INFORMATION: Cylinders should be transported in a secure position, in a well-ventilated vehicle. The transportation of compressed gas cylinders in automobiles or in closed-body vehicles can present serious safety hazards. If transporting these cylinders in vehicles, ensure these cylinders are not exposed to extremely high temperatures (as may occur in an enclosed vehicle on a hot day). Additionally, the vehicle should be well-ventilated during transportation.

Note: DOT 39 Cylinders ship in a strong outer carton (overpack). Pertinent shipping information goes on the outside of the overpack. DOT 39 Cylinders do not have transportation information on the cylinder itself.

TRANSPORT CANADA TRANSPORTATION OF DANGEROUS GOODS REGULATIONS: This gas is considered as Dangerous Goods, per regulations of Transport Canada.

PROPER SHIPPING NAME: Compressed gases, n.o.s. (*Oxygen, Nitrogen)*or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not Applicable

HAZARD LABEL: Class 2.2 (Non-Flammable Gas)

SPECIAL PROVISIONS: None

EXPLOSIVE LIMIT AND LIMITED QUANTITY INDEX: 0.12

ERAP INDEX: None

PASSENGER CARRYING SHIP INDEX: None

PASSENGER CARRYING ROAD VEHICLE OR PASSENGER CARRYING RAILWAY VEHICLE INDEX: 75

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

NOTE: Shipment of compressed gas cylinders via Public Passenger Road Vehicle is a violation of Canadian law (Transport Canada Transportation of Dangerous Goods Act, 1992).

15. REGULATORY INFORMATION

ADDITIONAL U.S. REGULATIONS:

U.S. SARA REPORTING REQUIREMENTS: This gas is not subject to the reporting requirements of Sections 302, 304 and 313 of Title III of the Superfund Amendments and Reauthorization Act., as follows:

COMPONENT	SARA 302 (40 CFR 355, Appendix A)	SARA 304 (40 CFR Table 302.4)	SARA 313 (40 CFR 372.65)
n-Hexane	NO	YES	YES
Hydrogen Sulfide	YES	YES	YES

15. REGULATORY INFORMATION (Continued)

U.S. SARA THRESHOLD PLANNING QUANTITY: Section 302 EHS TPQ = Hydrogen Sulfide = 500 lbs (227 kg);

U.S. TSCA INVENTORY STATUS: The components of this gas mixture are listed on the TSCA Inventory.

U.S. CERCLA REPORTABLE QUANTITY (RQ): Hexane = 5000 lb (2270 kg); Hydrogen Sulfide = 100 lbs (45.4 lb)

OTHER U.S. FEDERAL REGULATIONS:

- Hydrogen Sulfide, Carbon Monoxide, Propane, n-Pentane and n-Hexane are subject to the reporting requirements of CFR 29 1910.1000.
- Hydrogen Sulfide, Propane and n-Pentane are subject to the reporting requirements of Section 112(r) of the Clean Air Act. The Threshold Quantity for each of these gases is 10,000 pounds and so this mixture will not be affected by the regulation.
- Depending on specific operations involving the use of this gas mixture, the regulations of the Process Safety Management of Highly Hazardous Chemicals may be applicable (29 CFR 1910.119). Hydrogen Sulfide is listed in Appendix A of this regulation. The Threshold Quantity for Hydrogen Sulfide under this regulation is 1500 lbs.
- This gas mixture does not contain any Class I or Class II ozone depleting chemicals (40 CFR part 82).
- Nitrogen, Oxygen and n-Hexane are not listed Regulated Substances, per 40 CFR, Part 68, of the Risk Management for Chemical Releases. Hydrogen Sulfide is listed under this regulation in Table 1 as a Regulated Substance (Toxic Substance), in quantities of 10,000 lbs (4,553 kg) or greater. Carbon Monoxide, Propane and n-Pentane are listed under this regulation in Table 3, as Regulated Substances (Flammable), in quantities of 10,000 lbs (4,553 kg) or greater, and so this mixture will not be affected by the regulation.

U.S. STATE REGULATORY INFORMATION: The components of this gas mixture are covered under the following specific State regulations:

Alaska - Designated Toxic and Hazardous Substances: Carbon Monoxide, Propane, n-Pentane, n-Hexane, Hydrogen Sulfide.	Michigan - Critical Materials Register: No.	Pennsylvania - Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Propane, n-Pentane, n-Hexane, Hydrogen Sulfide.
California - Permissible Exposure Limits for Chemical Contaminants: Carbon Monoxide, Nitrogen, Propane, n-Pentane, n-Hexane, Hydrogen Sulfide.	Minnesota - List of Hazardous Substances: Carbon Monoxide, Propane, n-Pentane, n-Hexane, Hydrogen Sulfide.	Rhode Island - Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Propane, n-Pentane, n-Hexane, Hydrogen Sulfide.
Florida - Substance List: Oxygen, Carbon Monoxide, n-Pentane, n-Hexane, Hydrogen Sulfide.	Missouri - Employer Information/Toxic Substance List t: n-Pentane, n-Hexane, Propane, Hydrogen Sulfide.	Texas - Hazardous Substance List: n-Pentane, n-Hexane, Propane, Hydrogen Sulfide.
Illinois - Toxic Substance List: Carbon Monoxide, Propane, n-Pentane, n-Hexane, Hydrogen Sulfide.	New Jersey - Right to Know Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Propane, n-Pentane, n-Hexane.	West Virginia - Hazardous Substance List: n-Pentane, n-Hexane, Propane, Hydrogen Sulfide.
Kansas - Section 302/313 List: No.	North Dakota - List of Hazardous Chemicals, Reportable Quantities: Hydrogen Sulfide.	Wisconsin - Toxic and Hazardous Substances: n-Pentane, n-Hexane, Propane, Hydrogen Sulfide
Massachusetts - Substance List: Oxygen, Carbon Monoxide, Propane, n-Pentane, n-Hexane, Hydrogen Sulfide.		

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): The Carbon Monoxide component of this gas mixture is on the California Proposition 65 lists as a chemical known to the State of California to cause birth defects or other reproductive harm.

ADDITIONAL CANADIAN REGULATIONS:

CANADIAN DSL/NDSL INVENTORY STATUS: The components of this gas mixture are on the Canadian DSL Inventory.

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA) PRIORITIES SUBSTANCES LISTS: The components of this gas mixture are not on the CEPA Priorities Substances List.

CANADIAN WHMIS CLASSIFICATION: This gas mixture is categorized as a Controlled Product, Hazard Classes A and D2A, as per the Controlled Product Regulations.

16. OTHER INFORMATION

INFORMATION ABOUT DOT-39 NRC (Non-Refillable Cylinder) PRODUCTS

DOT 39 cylinders ship as hazardous materials when full. Once the cylinders are relieved of pressure (empty) they are not considered hazardous material or waste. Residual gas in this type of cylinder is not an issue because toxic gas mixtures are prohibited. Calibration gas mixtures typically packaged in these cylinders are Nonflammable n.o.s., UN 1956. A small percentage of calibration gases packaged in DOT 39 cylinders are flammable or oxidizing gas mixtures.

For disposal of used DOT-39 cylinders, it is acceptable to place them in a landfill if local laws permit. Their disposal is no different than that employed with other DOT containers such as spray paint cans, household aerosols, or disposable cylinders of propane (for camping, torch etc.). When feasible, we recommended recycling for scrap metal content. CALGAZ will do this for any customer that wishes to return cylinders to us prepaid. All that is required is a phone call to make arrangements so we may anticipate arrival. Scrapping cylinders involves some preparation before the metal dealer may accept them. We perform this operation as a service to valued customers who want to participate.

MIXTURES: When two or more gases or liquefied gases are mixed, their hazardous properties may combine to create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an Industrial Hygienist or other trained person when you make your safety evaluation of the end product. Remember, gases and liquids have properties which can cause serious injury or death.

Further information about the handling of compressed gases can be found in the following pamphlets published by: Compressed Gas Association Inc. (CGA), 1725 Jefferson Davis Highway, Suite 1004, Arlington, VA 22202-4102. Telephone: (703) 412-0900.

P-1	“Safe Handling of Compressed Gases in Containers”
AV-1	“Safe Handling and Storage of Compressed Gases”
	“Handbook of Compressed Gases”

PREPARED BY: CHEMICAL SAFETY ASSOCIATES, Inc.
PO Box 3519, La Mesa, CA 91944-3519
619/670-0609

Fax on Demand: 1-800/231-1366



This Material Safety Data Sheet is offered pursuant to OSHA's Hazard Communication Standard, 29 CFR, 1910.1200. Other government regulations must be reviewed for applicability to this gas mixture. To the best of CALGAZ knowledge, the information contained herein is reliable and accurate as of this date; however, accuracy, suitability or completeness are not guaranteed and no warranties of any type, either express or implied, are provided. The information contained herein relates only to this specific product. If this gas mixture is combined with other materials, all component properties must be considered. Data may be changed from time to time. Be sure to consult the latest edition.

SAFETY DATA SHEET

Version 4.20
Revision Date 11/07/2017
Print Date 10/06/2018

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Trizma® base

Product Number : T1503

Brand : Sigma

CAS-No. : 77-86-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

Not a hazardous substance or mixture.

2.2 GHS Label elements, including precautionary statements

Not a hazardous substance or mixture.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

This substance is not considered to be persistent, bioaccumulating and toxic (PBT).

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 2-Amino-2-(hydroxymethyl)-1,3-propanediol
THAM
Trometamol
Tris base
Tris(hydroxymethyl)aminomethane

Formula : C₄H₁₁NO₃

Molecular weight : 121.14 g/mol

CAS-No. : 77-86-1

EC-No. : 201-064-4

Registration number : 01-2119957659-16-XXXX

No components need to be disclosed according to the applicable regulations.

4. FIRST AID MEASURES

4.1 Description of first aid measures

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration.

In case of skin contact

Wash off with soap and plenty of water.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Avoid dust formation. Avoid breathing vapours, mist or gas.

For personal protection see section 8.

6.2 Environmental precautions

No special environmental precautions required.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Hygroscopic. Store under inert gas.

Storage class (TRGS 510): 13: Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

General industrial hygiene practice.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place. The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

No special environmental precautions required.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--------------------|--|
| a) Appearance | Form: crystalline
Colour: colourlesswhite |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | 10.5 - 12 |

e) Melting point/freezing point	Melting point/range: 168 °C (334 °F)
f) Initial boiling point and boiling range	288 °C (550 °F) at 1,013 hPa (760 mmHg) - Decomposes below the boiling point.
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	Does not sustain combustion.
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	678 g/l at 20 °C (68 °F)
o) Partition coefficient: n-octanol/water	log Pow: -2.31 at 20 °C (68 °F)
p) Auto-ignition temperature	The substance or mixture is not classified as self heating.
q) Decomposition temperature	No data available
r) Viscosity	Not applicable
s) Explosive properties	Not explosive
t) Oxidizing properties	The substance or mixture is not classified as oxidizing.

9.2 Other safety information

Bulk density	800 kg/m ³
Dissociation constant	8.22 at 25 °C (77 °F)

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

hygroscopic

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Nitrogen oxides (NO_x)

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD₅₀ Oral - Rat - > 5,000 mg/kg
(OECD Test Guideline 425)

Inhalation: No data available

LD50 Dermal - Rat - > 5,000 mg/kg
(OECD Test Guideline 402)

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation
(OECD Test Guideline 404)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation
(OECD Test Guideline 405)

Respiratory or skin sensitisation

Buehler Test - Guinea pig

Does not cause skin sensitisation.
(OECD Test Guideline 406)

Germ cell mutagenicity

Result: Not mutagenic in Ames Test

in vitro assay

Result: negative

In vitro tests did not show mutagenic effects

Result: In vivo tests did not show any chromosomal changes.

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

Repeated dose toxicity Rat - Oral - Subacute toxicity - NOAEL : 1,000 mg/kg

RTECS: TY2900000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to daphnia and other aquatic EC50 - Daphnia (water flea) - > 980 mg/l - 48 h

invertebrates

Toxicity to algae EC50 - Algae - 397 mg/l - 72 h

NOEC - Algae - 100 mg/l - 72 h

12.2 Persistence and degradability

Biodegradability Result: - Readily biodegradable.
(OECD Test Guideline 301F)

12.3 Bioaccumulative potential

No bioaccumulation is to be expected (log Pow <= 4).

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

This substance is not considered to be persistent, bioaccumulating and toxic (PBT).

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

Not dangerous goods

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

No SARA Hazards

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

Tris (hydroxymethyl) aminomethane

CAS-No.
77-86-1

Revision Date

Tris (hydroxymethyl) aminomethane

CAS-No.
77-86-1

Revision Date

New Jersey Right To Know Components

CAS-No.

Revision Date

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**HMIS Rating**

Health hazard:	0
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.20

Revision Date: 11/07/2017

Print Date: 10/06/2018

Incident Investigation and Reporting Program

**INCIDENT INVESTIGATION AND
REPORTING MANAGEMENT PROGRAM**

CORPORATE HEALTH AND SAFETY MANAGER : Brian Hobbs, CIH, CSP
EFFECTIVE DATE : 01/19
REVISION NUMBER : 4

TABLE OF CONTENTS

1. PURPOSE.....	1
2. SCOPE AND APPLICABILITY.....	1
3. RESPONSIBILITIES	1
3.1 Corporate Health and Safety Manager (CHSM)	1
3.2 Office Manager (OM)	1
3.3 Office Health and Safety Manager (OHSM)	1
3.4 Project Manager (PM).....	2
3.5 Site Health and Safety Officer (SHSO).....	2
3.6 All Personnel	2
4. PROCEDURE	2
4.1 Incident Investigation	2
4.2 Incident Report.....	3
Appendix A – Accident Report and Investigation Form	1
Appendix B – Near Loss Form	1
Appendix C – Injury Illness Reporting Flow Chart	1

APPENDICES

Appendix A – Accident Report and Investigation Form
Appendix B – Near Loss Form
Appendix C – Injury Illness Reporting Flow Chart

1. PURPOSE

Roux Associates, Inc. and its affiliated companies, Roux Environmental Engineering and Geology, D.P.C, and Remedial Engineering (collectively, "Roux") has instituted the following management program for reporting Environmental Health and Safety (EHS) incidents and near losses, investigation and correcting the causes of incidents, tracking incidents and corrective actions taken, and sharing the cause and corrective actions with Roux personnel. These practices and procedures establish a method to track progress and improvements to the company EHS performance.

2. SCOPE AND APPLICABILITY

These procedures apply to all Roux employees. Employees are required to follow these procedures for all incidents involving Roux personnel, or other personnel (e.g., subcontractors) working for Roux, regardless of the specific work activity or work location.

This program is intended, in part, to fulfill the Occupational Safety and Health Administration (OSHA) occupational injury and illness reporting and recording requirements cited in the Code of Federal Regulations (CFR) at 29 CFR 1904.

3. RESPONSIBILITIES

It shall be the responsibility of all Roux employees to report all incidents as soon as possible to the PM (or Administrative Manager for office-related incidents), SHSO, OHSM and OM, regardless of severity. Additionally, the following positions have specific responsibilities for implementing this specific SOP.

3.1 Corporate Health and Safety Manager (CHSM)

- The CHSM has the responsibility of ensuring that a system is in place for reporting, investigation, correction, and communicating of EHS incidents and near losses.
- The CHSM has the overall responsibility of implementing and communicating the contents of this program to Office Health and Safety Managers (OHSMs).
- The CHSM will review all incidents and corrective actions taken. The CHSM will provide a summary of serious incidents to the Board of Directors.
- The CHSM will communicate learnings from incidents and corrective actions taken to all personnel, through quarterly communications.
- The CHSM will periodically review and evaluate the effectiveness of this procedure.

3.2 Office Manager (OM)

- The OM will designate the individual to serve as the OHSM responsibility for ensuring that requirements in this procedure are met.
- The OM will ensure that sufficient resources are allocated to fulfill the requirements of this procedure.
- The OM will conduct final review of all incident reports prepared under this procedure.

3.3 Office Health and Safety Manager (OHSM)

- It is the responsibility of the OHSM to review draft incident reports and assist the OM in finalizing reports of all accidents, illnesses and incidents related to work activity, and to assist the SHSO when necessary.

- The OHSM may not approve a site-specific HASP unless the HASP includes incident reporting procedures and forms.
- The OHSM will suggest and implement corrective actions to prevent the same type of incident from re-occurring.
- The OHSM will keep all incident reports, corrective action taken, and follow-up forms on file. The OHSM will provide copies of all final reports and forms to the CHSM within one week of the incident. If a serious incident occurs, the CHSM will be notified as soon as possible.
- The occurrence of a serious incident will trigger an EHS audit by the OHSM.

3.4 Project Manager (PM)

- It shall be the PM's responsibility to promptly correct any deficiencies that were determined to cause or contribute to the incident investigated.
- If a site-specific HASP is not utilized, the PM must ensure that field personnel have copies of the Roux Accident Reporting and Investigation Forms.
- The PM has the responsibility of ensuring that the SHSO and other field personnel understand the need for timely incident reporting.
- In the event of an incident, the PM will determine the root cause of the incident with the assistance of the SHSO and/or OHSM. The PM should provide input as to corrective preventative measures.

3.5 Site Health and Safety Officer (SHSO)

- The SHSO shall provide the details of the incident to the OHSM, PM and OM. The OM or his delegate will provide additional notifications, such as, in the event of a work-related motor vehicle accident, to include Roux Legal.
- It is the SHSO's responsibility to immediately notify the OHSM and the PM when any incident occurs. Such notification should take place immediately following the completion of any emergency actions required by the HASP.
- The SHSO should provide input as to corrective preventative measures.
- The SHSO must ensure that corrective actions proposed by the OHSM or OM are carried out.

3.6 All Personnel

- All personnel are responsible for reporting and describing the details of any incident in which they are involved to the SHSO and PM. Such notification should take place immediately following the completion of any emergency actions required by the HASP and after the loss and before the scene is disturbed or vehicles moved.

4. PROCEDURE

4.1 Incident Investigation

On receiving a report of incident or near loss occurrence from a Roux employee, the SHSO or OHSM shall immediately investigate the circumstances and shall make appropriate recommendations to prevent recurrence. The Incident Report form can be found in **Appendix A**, and Near Loss form can be found in **Appendix B**. The OHSM may participate in the investigation of more serious accidents and incidents that occur on-site. The Corporate Health and Safety Manager (CHSM) shall also be immediately notified by telephone on occurrence of a serious accident or incident. At the CHSM's discretion, he may also participate in the investigation.

4.2 Incident Report

Details of the incident shall be documented using the Accident Report and Investigation Forms (Appendix A) within twenty-four (24) hours of the incident and shall be distributed to the SHSO, the OHSM, PM, OM and the CHSM. The CHSM will update OSHA Forms 301 and the 300 log when necessary.



Appendix A – Accident Report and Investigation Form

- ☐ Roux Environmental Engineering and Geology, D.P.C.
☐ Roux Associates, Inc. ☐ Remedial Engineering, P.C.

ACCIDENT REPORT

Brian Hobbs, Corporate Health and Safety Manager
Cell: (631) 807-0193; Office: (631) 630-2416

PART 1: ADMINISTRATIVE INFORMATION

Project #: _____ Project Name: _____ Project Location (street address/city/state): _____ Client Corporate Name / Contact / Address / Phone #: _____ _____ _____ _____ _____		Immediate Verbal Notifications Given To: Corporate Health & Safety <input type="checkbox"/> Yes <input type="checkbox"/> No Office Health & Safety <input type="checkbox"/> Yes <input type="checkbox"/> No Office Manager <input type="checkbox"/> Yes <input type="checkbox"/> No Project Principal <input type="checkbox"/> Yes <input type="checkbox"/> No Project Manager <input type="checkbox"/> Yes <input type="checkbox"/> No Client Contact <input type="checkbox"/> Yes <input type="checkbox"/> No	REPORT STATUS (time due): <input type="checkbox"/> Initial (24 hr) <input type="checkbox"/> Final (5-10 days) Date: _____ Date: _____ Accident Report Delivered To: Corporate Health & Safety <input type="checkbox"/> Yes <input type="checkbox"/> No Office Health & Safety <input type="checkbox"/> Yes <input type="checkbox"/> No Office Manager <input type="checkbox"/> Yes <input type="checkbox"/> No Project Principal <input type="checkbox"/> Yes <input type="checkbox"/> No Project Manager <input type="checkbox"/> Yes <input type="checkbox"/> No	
		REPORT TYPE: <input type="checkbox"/> Loss <input type="checkbox"/> Near Loss Estimated Costs: \$ _____		
OSHA CASE # Assigned by Corporate Health & Safety if Applicable: _____		Corporate Health & Safety Confirmed Final Accident Report <input type="checkbox"/> Yes <input type="checkbox"/> No		
DATE OF INCIDENT: _____	TIME INCIDENT OCCURRED: _____ <input type="checkbox"/> AM <input type="checkbox"/> PM	INCIDENT LOCATION – City, State, and Country (If outside U.S.A.) _____		
INCIDENT TYPES: (Select most appropriate if Loss occurred.) From lists below, please select the option that best categories the incident. When selecting an injury or illness, also indicate the severity level.				
<div><input type="checkbox"/> INJURY -----Severity Level----- <input type="checkbox"/> Fatality <input type="checkbox"/> First Aid <input type="checkbox"/> Medical <input type="checkbox"/> Restricted Work <input type="checkbox"/> Lost Time <input type="checkbox"/> Treatment</div> <div><input type="checkbox"/> ILLNESS</div> <div>OTHER INCIDENT TYPES <input type="checkbox"/> Spill / Release <input type="checkbox"/> Misdirected Waste <input type="checkbox"/> Consent Order <input type="checkbox"/> NOV Material involved: _____ <input type="checkbox"/> Property Damage <input type="checkbox"/> Exceedance Quantity (U.S. Gallons): _____ <input type="checkbox"/> Motor Vehicle <input type="checkbox"/> Fine / Penalty</div>				
ACTIVITY TYPE (Check most appropriate one.) <input type="checkbox"/> CAMP <input type="checkbox"/> Gauging <input type="checkbox"/> Subsurface <input type="checkbox"/> Construction <input type="checkbox"/> O&M <input type="checkbox"/> Clearance <input type="checkbox"/> Drilling <input type="checkbox"/> Other Soil Work <input type="checkbox"/> Trucking <input type="checkbox"/> Driving (e.g. Compaction) <input type="checkbox"/> Waste Mgmt. <input type="checkbox"/> Excavation <input type="checkbox"/> Sampling <input type="checkbox"/> Work Area Prep. / Trenching <input type="checkbox"/> Site Walk/Inspection <input type="checkbox"/> Other		INJURY TYPE (Check all applicable.) <input type="checkbox"/> Abrasion <input type="checkbox"/> Occupational Illness <input type="checkbox"/> Amputation <input type="checkbox"/> Puncture <input type="checkbox"/> Burn <input type="checkbox"/> Rash <input type="checkbox"/> Cold/Heat Stress <input type="checkbox"/> Repetitive Motion <input type="checkbox"/> Inflammation <input type="checkbox"/> Sprain/Strain <input type="checkbox"/> Laceration <input type="checkbox"/> Other	BODY PART AFFECTED (Check all applicable.) <input type="checkbox"/> Respiratory <input type="checkbox"/> Shoulder <input type="checkbox"/> Face <input type="checkbox"/> Neck <input type="checkbox"/> Arm <input type="checkbox"/> Leg <input type="checkbox"/> Chest <input type="checkbox"/> Wrist <input type="checkbox"/> Knee <input type="checkbox"/> Abdomen <input type="checkbox"/> Hand/Fingers <input type="checkbox"/> Ankle <input type="checkbox"/> Groin <input type="checkbox"/> Eye <input type="checkbox"/> Foot/Toes <input type="checkbox"/> Back <input type="checkbox"/> Head <input type="checkbox"/> Other	
I. PERSON(S) DIRECTLY / INDIRECTLY INVOLVED IN INCIDENT (Attach additional information as necessary/applicable.)				
Name/Phone # of Each Person Directly/Indirectly Involved in Incident:	Designate: Roux/Remedial Employee Roux/Remedial Subcontractor Client Employee Client Contractor Third Party	As applicable, Current Occupation; Yrs in Current Occupation; Current Position; and Yrs in Current Position:	As applicable, Employer Name; Address; and Phone #:	As applicable, Supervisor Name; and Phone #:
1)				
2)				



II. PERSONS INJURED IN INCIDENT (Attach additional information as necessary/applicable.)					
Name/Phone # of Each Person Injured in Incident:	Designate: Roux/Remedial Employee Roux/Remedial Subcontractor Client Employee Client Contractor Third Party	As applicable, Current Occupation; Yrs in Current Occupation; Current Position; and Yrs in Current Position:	As applicable, Employer Name; Address; and Phone #:	As applicable, Supervisor Name; and Phone #:	Description of Injury:
1)					
2)					

III. PROPERTY DAMAGED IN INCIDENT (Attach additional information as necessary/applicable.)				
Property Damaged:	Property Location:	Owner Name, Address & Phone #:	Description of Damage:	Estimated Cost:
1)				
2)				\$

IV. WITNESSES TO INCIDENT (Attach additional information as necessary/applicable.)		
Witness Name:	Address:	Phone #:
1)		
2)		

PART 2: WHAT HAPPENED AND INCIDENT DETAILS

PROVIDE FACTUAL DESCRIPTION OF INCIDENT (e.g., describe loss/near loss, injury, response / treatment).

I. AUTHORITIES/GOVERNMENTAL AGENCIES NOTIFIED (Attach additional information as necessary/applicable.)

Authority/Agency Notified:	Name/Phone #/Fax # of Person Notified:	Address of Person Notified:	Date & Time of Notification:	Exact Information Reported/Provided:

II. PUBLIC RESPONSES TO INCIDENT (if applicable)

Response/Inquiry By: (check one)	Entity Name:	Name/Phone # of Respondent/ Inquirer:	Address of Entity/Person:	Date & Time of Response/Inquiry:
<input type="checkbox"/> Newspaper <input type="checkbox"/> Television <input type="checkbox"/> Community Group <input type="checkbox"/> Neighbors <input type="checkbox"/> Other				

Describe Response/Inquiry:

Roux/Remedial Response:

(Check all that apply.) (Attach photos, drawings, etc. to help illustrate the incident.)

ATTACHED INFORMATION: ☐Photo ☐Sketches ☐Vehicle Acord Form ☐Police Report ☐Other

Name(s) of person(s) who prepared Initial and Final Report:	Title(s):	Phone number(s):

PART 3: INVESTIGATION TEAM ANALYSIS

Date Investigation Started (MM/DD/YYYY):

Factors, Root Causes, and Solution (FRCS): Complete FRCS form and answer all 7 factor questions. If answering NO to Factors 1 – 4 identify root cause(s) and explain why QIs occurred. If answering YES to Factors 5 – 7 circle the root cause(s). Transfer the solutions guidance that addresses each root cause from the FRCS form to this form. Attach your completed FRCS Worksheet. If Factors 1-7 do not apply to the incident, write "External Cause" in the Factor column below and leave the remaining fields blank.

DESCRIPTION OF UNDESIRABLE BEHAVIOR/CONDITION

1.

2.

FACTOR(S) AND SOLUTION(S): HOW TO REDUCE POSSIBILITY OF INCIDENT RECURRING

Selection of factors and solutions reflects the analysis of investigation team and is not meant to be a legally binding conclusion as to the Root Cause and/or solution.

CAUSAL FACTOR/ BEHAVIOR/ CONDITION	ROOT CAUSE	SOLUTION(S) [Must Match Root Cause(s)]	PERSON RESPONSIBLE	AGREED DUE DATE	ACTUAL COMPLETION DATE

INVESTIGATION TEAM:

PRINT NAME	JOB POSITION	DATE	SIGNATURE

QUALITY REVIEW Correct root cause(s) identified? Do root cause(s) and solution(s) match? Are solution(s) feasible / maintainable?

Name:

Job Title:

PART 4: Date Solutions were Implemented & Validated (Were Solutions Effective?)

Date	Solution	Verifier / Validator Name and Job Title	Details (of I & V performed)

Appendix B – Near Loss Form

HEALTH & SAFETY NEAR LOSS ROUX REPORT FORM

- ☐ Roux Environmental Engineering and Geology, D.P.C.
☐ Roux Associates, Inc. ☐ Remedial Engineering, P.C.

(Check applicable company name)

PART 1: ADMINISTRATIVE INFORMATION			
Office: <input type="checkbox"/> New York <input type="checkbox"/> Massachusetts <input type="checkbox"/> New Jersey <input type="checkbox"/> Illinois <input type="checkbox"/> CA - Los Angeles <input type="checkbox"/> CA - Oakland			
Project Manager:		Project Principal:	
Project Name:		Project Location:	
PART 2: NEAR LOSS INCIDENT DETAILS			
Date\Time Occurred (MM/DD/YYYY HH:MM):		Date\Time Submitted (MM/DD/YYYY HH:MM):	
NEAR LOSS INCIDENT TYPE - What could have happened? - Select all that apply (1-7)			
1. <input type="checkbox"/> Fire / Explosion	3. <input type="checkbox"/> Security (e.g., theft, trespassing, vandalism)	4. <input type="checkbox"/> Environmental (Spill, permit exceedance, etc.)	6. <input type="checkbox"/> Property/Equipment Damage
2. <input type="checkbox"/> Injury / Illness		5. <input type="checkbox"/> Transportation of personnel (vehicle accident)	7. <input type="checkbox"/> Business Interruption
Event Leading to Potential Injury/Illness:			
Job Task*:		Equipment Involved*:	
WHAT HAPPENED? Do not include individuals' names. Ensure photos, sketches, etc. are not personally identifiable unless written consent has been obtained.			
Summary (1-2 sentences. Provide brief description of the incident. Provide facts only, no speculation or opinion):			
Incident Details (Brief factual details of what, where, when; include photos, sketches, etc. as attachments):			
Immediate Corrective Actions Taken:			
SERIOUS INJURY OR FATALITY (SIF): IF AN ACTUAL SIF, USE EXISTING ROUX ACCIDENT REPORTING FORM			
Could this have resulted in a SIF? <input type="checkbox"/> Yes <input type="checkbox"/> No			
A potential SIF is defined as likely to have caused an injury resulting in significant physical body damage with probable long term and/or life altering complications.			
INCIDENT INVOLVED:			
Roux Employee: <input type="checkbox"/> Yes <input type="checkbox"/> No		Subcontractor Company Name:	
INVESTIGATION TEAM			
NAME	JOB TITLE	NAME	JOB TITLE

PART 3: INCIDENT INVESTIGATION FINDINGS AND REPORT QUALITY REVIEW

Date Investigation Started (mm/dd/yyyy):

Factors, Root Causes, and Solution (FRCS): Complete FRCS form and answer all 7 factor questions. If answering NO to Factors 1 – 4 identify root cause(s) and explain why QIs occurred. If answering YES to Factors 5 – 7 circle the root cause(s). Transfer the solutions guidance that addresses each root cause from the FRCS form to this form. Attach your completed FRCS Worksheet. If Factors 1-7 do not apply to the incident, write "External Cause" in the Factor column below and leave the remaining fields blank. **Do not include individuals' names.**

DESCRIPTION OF UNDESIRABLE BEHAVIOR/CONDITION

1.

2.

FACTOR(S) AND SOLUTION(S): HOW TO REDUCE POSSIBILITY OF INCIDENT RECURRING

Selection of factors and solutions reflects the analysis of investigation team and is not meant to be a legally binding conclusion as to the Root Cause and/or solution.

Behavior / Condition	Root Cause	Solution(s) (Must Match Root Cause)	Person Responsible for Completion	Completion Target Date	Completion Actual Date

QUALITY REVIEW Correct root cause(s) identified? Do root cause(s) and solution(s) match? Are solution(s) feasible / maintainable?

Name:

Job Title:

PART 4: Date Solutions were Implemented & Validated (Were Solutions Effective?)

Date	Solution	Verifier / Validator Name and Job Title	Details (of I & V performed)

***JOB TASK - Select the most appropriate one** (primary job associated with incident-related work activity, avoid "Other" if possible)


- | | | |
|-------------------------|--------------------------------------|---------------------------|
| 1. CAMP | 7. O&M | 12. Trucking |
| 2. Construction | 8. Other Soil Work (e.g. Compaction) | 13. Waste Management |
| 3. Drilling | 9. Sampling | 14. Work Area Preparation |
| 4. Driving | 10. Site Walk/ Inspection | 15. Other |
| 5. Excavation/Trenching | 11. Subsurface Clearance | |
| 6. Gauging | | |

***EQUIPMENT INVOLVED THAT CONTRIBUTED TO H&S NEAR LOSS - Select all that apply**

- | | | | | |
|--------------------------------|-----------------------------|------------------------------------|--|------------------------------------|
| 1. Air Stripper | 25. Fire Extinguisher | 51. Maintenance Tool, General | 77. Safety Shoes / Boots | 98. Vapor Extraction System |
| 2. API Separator | 26. Forklift | 52. Manifold | 78. Safety Vest / Clothing | 99. Vapor-Phase Treatment System |
| 3. Automobile | 27. Front End Loader | 53. Manlift/Basket/Cherry Picker | 79. Rope | 100. Other System, Type: _____ |
| 4. Boom Material | 28. Grader | 54. Motor, Electric | 80. Bailer | 101. Surge Tank |
| 5. Bulldozer | 29. Hammer | 55. Oxidizer | 81. Geoprobe | 102. Underground Tank |
| 6. Cable | 30. Knife | 56. Pallet | 82. Hand Auger | 103. Telemetry System |
| 7. Carbon Drum / Vessel | 31. Non-Powered Equipment | 57. Piping | 83. PID | 104. Testing Devices |
| 8. Chain Block | 32. Powered Equipment | 58. Piping, Hose | 84. Multi-Gas Meter | 105. Tractor Trailer |
| 9. Compressor, Air | 33. Drill | 59. Piping, Injection/Mixing Point | 85. Sample Container | 106. Truck, Flatbed |
| 10. Control Panel (local) | 34. Grinder | 60. Hydrojet | 86. Split-Spoon Sampler | 107. Truck, Pickup |
| 11. Crane (mobile) | 35. Hydraulic Torque Wrench | 61. Centrifugal Pump | 87. Sling | 108. Truck, Tank Truck |
| 12. Drill Rig | 36. Powered Saw | 62. Diaphragm Pump | 88. Snow Blower | 109. Truck, Vacuum |
| 13. Drilling Equipment, Vacuum | 37. Impact Wrench | 63. Reciprocating Pump | 89. Snow Plow | 110. Safety Valve |
| 14. Drum, Vertical | 38. Saw | 64. Regenerative Pump | 90. Space Heater | 111. Block Valve |
| 15. Dump Truck | 39. Screwdriver | 65. Rotary Pump | 91. Air Sparging System | 112. Extraction Well |
| 16. Electric Heater | 40. Shears | 66. Transfer Pump | 92. Carbon Treatment System | 113. Monitoring Well |
| 17. Electrical Power Supply | 41. Shovel | 67. Submersible Pump | 93. Chemical Oxidation System | 114. Recovery Well |
| 18. Engine, Combustion | 42. Snip | 68. Face Shield | 94. Dual Phase Product Recovery System | 115. Winch |
| 19. Equipment | 43. Wrench | 69. Fall Protection | 95. Groundwater Pump and Treat System | 116. Wire Rope |
| Safety Grounding | 44. Hoist | 70. Gloves | 96. POET System | 117. No Equipment Involved |
| 20. Excavator / Power Shovel | 45, Hook/Clamp/Buckle, etc. | 71. Hard Hat / Helmet | 97. Shed or Trailer | 118. MPT – Traffic Control Devices |
| 21. Exclusion Zone Equipment | 46. Jack | 72. Hearing Protection | | 118. Not in List (describe): _____ |
| 22 Fan / Blower | 47. Ladder, Extension | 73. Respiratory PPE (Chemical) | | |
| 23 Fencing | 48. Ladder, Platform | 74. Respiratory PPE (Particulate) | | |
| 24 Filter | 49. Ladder, Step | 75. Safety Glasses | | |
| | 50. Lock Out / Tag Out | 76. Safety Goggles | | |

Appendix C – Injury Illness Reporting Flow Chart

Health & Safety Near/Loss – Loss (Incident)* Notification Flow Chart

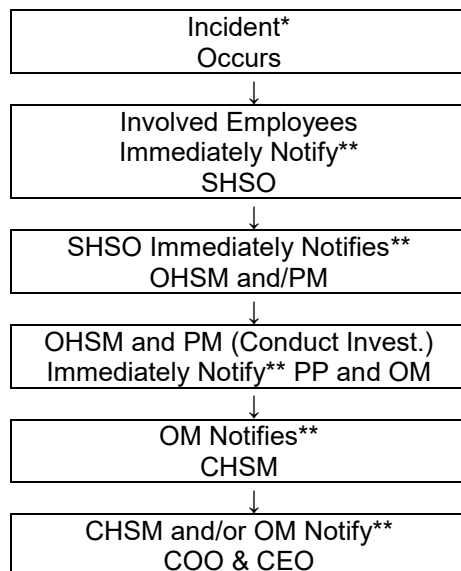

* Incident – any work or site-related occurrence that resulted in, or could potentially have resulted in, the need for medical care or in property damage (i.e., all injuries or illnesses, exposure to toxic materials or any other significant occurrence resulting in property damage or in a "near loss")

** Verbal Notification

Initial Incident Report (written) to SHSO, OHSM, OM and CHSM within 24 hours
Follow-up Report within one week.

Heavy Equipment Exclusion Zone Policy



**HEAVY EQUIPMENT EXCLUSION ZONE
MANAGEMENT PROGRAM**

CORPORATE HEALTH AND SAFETY MANAGER : Brian Hobbs, CIH, CSP
EFFECTIVE DATE : 01/2019
REVISION NUMBER : 1

TABLE OF CONTENTS

1. PURPOSE.....	2
2. SCOPE AND APPLICABILITY.....	2
3. PROCEDURES.....	2
3.1 Exceptions.....	3
4. TRAINING	3

1. PURPOSE

The purpose of the Exclusion Zone Management Program is to establish the minimum clearance distance that must be maintained between workers and heavy equipment while equipment is in operation (i.e., engaged or moving). The intent is to have no personnel or equipment entering the Exclusion Zone while the equipment is in operation or moving to ensure that Roux and Subcontractor employees are not unnecessarily exposed to the hazards of the equipment.

2. SCOPE AND APPLICABILITY

This Management Program applies to all Roux Associates, Inc. and its affiliated companies, Roux Environmental Engineering and Geology, D.P.C, and Remedial Engineering (collectively, "Roux") employees and their subcontractors who are performing field work and are potentially exposed to heavy equipment. For the purpose of this program, heavy equipment includes, but is not necessarily limited to: excavation equipment, drill rigs, vacuum trucks, forklifts, lull telehandlers, man lifts, bobcats, delivery trucks, etc.

3. PROCEDURES

As specified in the following sections of this Program, an Exclusion Zones must be established and maintained during activities involving the movement/operation of heavy equipment. The Exclusion Zone requirements apply to all personnel on the site but are primarily focused on those personnel who are required to be working in the vicinity of the equipment. The exclusion zone is in effect when heavy equipment is moving or engaged (ex. movement of an arm or bucket of an excavator, rotation of an auger, lifting of a load with a forklift, raising/lowering of a man lift, etc.).

1. The Exclusion Zone must meet the following minimum requirements:

- A minimum distance of 10 feet from all heavy equipment and loads being moved by the equipment;
- Greater than the swing/reach radius of any moving part on the heavy equipment (i.e., for large equipment this may mean an exclusion zone distance larger than 20 feet);
- Greater than the tip-over distance of the heavy equipment; and
- Greater than the radius of blind spots.

The size of the Exclusion Zone will need to be determined on a task-specific basis considering the size of the heavy equipment in use and the task being performed. Prior to all heavy equipment operations, the Exclusion Zone(s) distance must be specifically identified in the Job Safety Analysis (JSA).

2. The spotter (or another individual) should be assigned responsibility for enforcing the Exclusion Zone. The spotter should be positioned immediately outside of the Exclusion Zone within a clear line of sight of the equipment operator. The spotter must signal the operator to stop work if anyone or anything has the potential to enter or compromise the Exclusion Zone. The operator should stop work if the spotter is not within his/her line of sight. If multiple pieces of equipment are being used, each piece of equipment must have its own Exclusion Zone and spotter. For large excavation and demolition projects the spotter should be in constant radio contact (not cell phone) with the machine driver.
3. If an individual must enter the Exclusion Zone, the designated Spotter must signal the Equipment Operator to stop the equipment. Once the equipment is no longer moving (ex. movement of an arm of an excavator is STOPPED, lifting of a load with a forklift STOPPED, raising/lowering of a man lift is

STOPPED, etc.), the operator must DISENGAGE THE CONTROLS and STOP and SIGNAL BY “SHOWING HIS HANDS”. This signal will indicate that it is safe for the personnel to enter the limits of the Exclusion Zone to perform the required activity. The equipment must remain completely stopped/disengaged until all personnel have exited the limits of the Exclusion Zone and the designated Spotter has signaled by “SHOWING HIS HANDS” to the Equipment Operator that it is safe to resume operations.

4. When entering the limits of the Exclusion Zone, personnel must at a minimum:
 - Establish eye contact with the operator and approach the heavy equipment in a manner that is in direct line of sight to the Equipment Operator;
 - Never walk under any suspended loads or raised booms/arms of the heavy equipment; and
 - Identify a travel path that is free of Slip/Trip/Fall hazards.
5. The Exclusion Zone should be delineated using cones with orange snow fence or solid poles between the cones, barrels, tape or other measures. For work in rights-of-way rigid barriers, such as Jersey barriers or temporary chain link fence should be used. For certain types of wide-spread or moving/mobile equipment operations, such delineation may not be practicable around pieces of equipment or individual work areas. In such instances, it is expected that the entire operation will be within a larger secure work area or that additional means will be utilized to ensure security of the work zone.

All subcontractors who provide heavy equipment operations to field projects must implement a program that meets or exceeds the expectations described above as well as any additional requirements that may be required on a client or site-specific basis.

3.1 Exceptions

It is recognized that certain heavy equipment activities may require personnel to work within the limits of the Exclusion Zone as specified in this program. Such activities may include certain excavation clearance tasks, drill crew activities or construction tasks. However, any such activity must be pre-planned with emphasis on limiting the amount and potential exposure of any activity required within the zone. The critical safety steps to mitigate the hazards associated with working within the Exclusion Zone must be defined in the JSA and potentially other project-specific plans (i.e., critical lift plans, etc.), and approved by the Roux Project Principal and client representative, if required, prior to implementation.

4. TRAINING

Many Roux projects have different requirements that are client-specific or site-specific in nature. It is the responsibility of the Project Principal (or Project Manager if delegated this responsibility by the Project Principal) to ensure that the workers assigned to his/her projects are provided orientation and training with respect to these client and/or site-specific requirements.

APPENDIX E

Subsurface Utility Clearance Management Program



SUBSURFACE UTILITY CLEARANCE MANAGEMENT PROGRAM

CORPORATE HEALTH AND SAFETY MANAGER : Brian Hobbs, CIH, CSP
EFFECTIVE DATE : 01/19
REVISION NUMBER : 2

TABLE OF CONTENTS

1. PURPOSE.....	1
2. SCOPE AND APPLICABILITY.....	1
3. PROCEDURES.....	1
3.1 Before Intrusive Activities	1
3.2 During Intrusive Activities	2
3.3 Stop Work Authority.....	3

APPENDICES

Appendix A – Definitions

Appendix B – Example of Completed One Call

Appendix C – Roux Subsurface Utility Clearance Checklist

Appendix D – Utility Verification/Site Walkthrough Record

1. PURPOSE

Roux Associates, Inc. and its affiliated companies, Roux Environmental Engineering and Geology, D.P.C., and Remedial Engineering (collectively, “Roux”) has instituted the following program for completing proper utility mark-outs and for conducting subsurface clearance activities. This establishes a method to ensure, to the greatest extent possible, that utilities have been identified and contact and/or damage to underground utilities and other subsurface structures will be avoided.

2. SCOPE AND APPLICABILITY

The Subsurface Utility Clearance Management Program applies to all Roux employees, its contractors and subcontractors. Employees are expected to follow this program for all intrusive work involving Roux or other personnel (e.g., contractors/subcontractors) working for Roux unless the client’s requirements are more stringent. Deviation from the program regardless of the specific work activity or work location must be pre-approved based on client’s site knowledge, site experience and client’s willingness for the use of this program. Any and all exceptions shall be documented and pre-approved by the Project Principal and the Office Manager.

3. PROCEDURES

3.1 Before Intrusive Activities

During the project kick-off meeting for intrusive activities the PM will review the Roux Subsurface Utility Clearance Checklist and Utility Verification (Appendix C) / Site Walkthrough Record (Appendix D) and the below bullet points with the project field team:

(Please note that these are intended as general reminders only and should not be solely relied upon.)

- Ensure the Mark-out / Stake-out Request Information Sheet (or one-call report) is complete and accurate for the site including address and cross streets and review for missing utilities. (Note: utility mark-out organizations do not have contracts with all utilities and it is often necessary to contact certain utilities separately such as the local water and sewer authorities).
- Have written confirmation prior to mobilizing to the site that the firm or Roux personnel performing the intrusive activity has correctly completed the mark-out notification process including requesting mark-outs, waiting for mark-outs to be applied to ground surfaces at the site, and receiving written confirmation of findings (via fax or email) from utility operators for all known or suspected utilities in the proposed area of intrusive activity, and provided utility owner written confirmation to Roux personnel for review and project files documentation.
- Do not begin any intrusive activity until all utilities mark-out has been completed (i.e., did all utilities mark-out the site?) and any unresolved mark-out issues are finalized. Perform a site walk to review the existing utilities and determine if said utilities have been located by the utility locators.

(Note: The Tolerance Zone is defined as two feet plus half of the diameter or half of the greatest dimension (for elliptical sewers, duct banks and other non-cylindrical utilities) of a utility and two feet from the outside edge of any subsurface structure.)

- Install Pre-Clearance exploratory test holes (e.g., hand-dug test holes or other soft digging techniques) for the first 5-ft below land surface (BLS) at each location prior to conducting mechanized intrusive activities. The size of the pre-clearance exploratory test hole should be at a minimum twice the diameter of any downhole tool or boring device. (Note: Pre-Clearance exploratory test holes should be defined in the SOW/proposal provided to the client to prevent project delays and to allow adequate time for PM and PP to evaluate alternative approaches for the project. Alternative approaches will need to be pre-approved by the OM.

- For excavations, all utilities need to be marked and then exposed by hand following the protocols in this program. Pre-clearing for excavations may be performed by the “moat” technique (i.e., soft digging around the perimeter). In these cases, dig in small lifts (<12” for first 5 feet) using a dedicated spotter.) For Tolerance Zone work, unless otherwise agreed upon with the Utility Operator, work within the tolerance zone requires verification by means of hand-dug test holes performed to expose the utility. Once structures have been verified a minimum clearance of two feet must be maintained between the utility and any powered equipment.
- In addition, the following activities should be conducted:
 - Review the work scope to be performed with the site owner/tenant to determine if it may impact any utilities;
 - Attempt to procure any utility maps or historic drawings of subsurface conditions of the site;
 - **Determine the need for utility owner companies to be contacted or to have their representatives on site;**
 - Where mark-outs terminate at the property boundary, consider the use of private utility locating / GPR / geophysical-type services which may be helpful in locating utilities. Use of private utility locating firms, however, does not eliminate the legal requirement for the Excavator firm to submit a request for Public Utility Mark-outs. Also, the information provided by the service may be inaccurate and unable to locate subsurface utilities and structures in urban areas, landfills, urban fill areas and below reinforced slabs, etc. They should not be relied upon as the only means of performing utility clearance;
 - Documented description of the dig site which is included in the projects Health and Safety Plan (HASP) and one call report will be maintained in the field and distributed amongst Roux personnel its contractors and subcontractors; and
 - Documentation of the actual placement of mark outs in the field shall be collected using dated pictures, videos and/or sketches with distance from markings to fixed objects. All documentation shall be maintained within the project file.

3.2 During Intrusive Activities

The PM, field team lead or personnel performing oversight is to:

- Ensure the mark-out remains valid. (In certain states there are limits regarding the duration of time after the mark-out was applied to the ground surface work can be started or interrupted.) Additionally, the mark-outs must be maintained, documented, and in many cases refreshed periodically to be considered valid, this will be accomplished through calls to the one call center.
- Ensure intrusive activities are only performed within the safe boundaries of the mark-out as detailed in the One-Call Report.
- Halt all work if intrusive activities have resulted in discovery of an unmarked utility. Roux personnel shall notify the facility owner/operator and the one call center. All incidents such as this will be reported as per Roux Incident Investigation and Reporting Management Program.
- Halt all work if intrusive activities must take place outside of the safe boundaries of a mark-out and only proceed after new mark-outs are performed.
- Halt the intrusive activities and immediately consult with the PP if an unmarked utility is encountered.
- Completing any subsurface utility clearance incident reports that are necessary.

- If a utility cannot be found as marked Roux personnel shall notify the facility owner/operator directly or through the one call center. Following notification, the excavation may continue, unless otherwise specified in state law.
- Contractors/subcontractors must contact the one-call center to refresh the ticket when the excavation continues past the life of the ticket. Ticket life shall be dictated by state law however at a maximum ticket life shall not exceed 20 working days.

3.3 Stop Work Authority

Each Roux employee has Stop Work Authority which he or she will execute upon determination of any imminent safety hazard, emergency situation, or other potentially dangerous situation, such as hazardous weather conditions. This Stop Work Authority includes subsurface clearance issues such as the adequacy of a mark-out or identification during intrusive operations of an unexpected underground utility. Authorization to proceed with work will be issued by the PM/PP after such action is reviewed and resolved. The PM will initiate and execute all management notifications and contact with emergency facilities and personnel when this action is appropriate.

Appendix A - Definitions

<i>Intrusive Work Activities</i>	All activities such as digging or scraping the surface, including but not limited to, excavation, test pitting or trenching, soil vapor sampling or the installation of soil borings, soil vapor monitoring points and wells, or monitoring wells, and drilling within the basement slab of a recently demolished building.
<i>Mark-out / Stake Out</i>	The process of contracting with a competent and qualified company to confirm the presence or absence of underground utilities and structures. This process will clearly mark-out and delineate utilities that are identified so that intrusive work activities can be performed without causing disturbance or damage to the subsurface utilities and structures. After utility mark-outs are completed the soft digging will be completed prior to intrusive work.
<i>Tolerance Zone</i>	Defined as two feet on either side of the designated centerline of an identified utility, plus half of the diameter or half of the greatest dimension (for elliptical sewers, duct backs and other non-cylindrical utilities) of that utility and two feet from the outside edge of any subsurface structure.
<i>Structure</i>	For the purpose of this program a structure is defined as any underground feature that may a present potential source(s) of energy such as, but not limited to, utility vaults, bunkers, piping, electrical boxes, wires, conduits, culverts, utility lines, underground tanks and ducts.
<i>Soft Digging</i>	The safest way to remove material from unknown obstructions or services is by using tools such as a vactor or air knife, non-mechanical tools, or hand tools. The methods are clean and non-evasive and used for uncovering and exposing buried services, excavating and for providing a quick method of soil removal from sensitive areas.
<i>Verification</i>	Exploratory test-hole dug with hand tools within the Tolerance Zone to expose and verify the location, type, size, direction-of-run and depth of a utility or subsurface structure. Vacuum excavation (soft dig) methods can further facilitate exposure of a subsurface utility and accurately provide its location and identification prior to intrusive work approaching the Tolerance Zone.



Appendix B - Example of Completed One Call Report

Example Completed One-Call Report

New York 811

Send To: C_EMAIL Seq No: 744

Ticket No: 133451007 ROUTINE

Start Date: 12/16/13 Time: 7:00 AM Lead Time: 20

State: NY County: QUEENS Place: QUEENS

Dig Street: 46TH AVE Address:

Nearest Intersecting Street: VERNON BLVD

Second Intersecting Street: 11TH ST

Type of Work: SOIL BORINGS

Type of Equipment: GEOPROBE

Work Being Done For: ROUX

In Street: X On Sidewalk: X Private Property: Other:

On Property Location if Private: Front: Rear: Side:

Location of Work: MARK THE ENTIRE NORTH SIDE OF THE STREET AND SIDEWALK OF:
46TH AVE BETWEEN VERNON BLVD AND 11TH STREET

Remarks:

Nad: Lat: Lon: Zone:

ExCoord NW Lat: 40.7475399 Lon: -73.9534811 SE Lat: 40.7457406 Lon: -73.9493680

Company : ZEBRA ENVIROMENTAL Best Time: 6AM-5PM

Contact Name: DAVID VINES Phone: (516)596-6300

Field Contact: DAVID VINES Phone: (516)596-6300

Caller Address: 30 N PROSPECT AVE Fax Phone: (516)596-4422

LYNBROOK, NY 11563

Email Address: david@zebraenv.com

Additional Operators Notified:

ATTNY01 AT&T CORPORATION (903)753-3145

CEQ CONSOLIDATED EDISON CO. OF N.Y (800)778-9140

MCINY01 MCI (800)289-3427

PANYNJ01 PORT AUTHORITY OF NY & NJ (201)595-4841

VZQ VERIZON COMMUNICATIONS (516)297-1602

Link to Map for C_EMAIL: <http://ny.itic.occinc.com/XGMZ-DF2-L23-YAY>

Original Call Date: 12/11/13 Time: 1:15 PM Op: webusr

IMPORTANT NOTE: YOU MUST CONTACT ANY OTHER UTILITIES DIRECTLY

Appendix C - Roux Subsurface Utility Clearance Checklist

Roux Subsurface Utility Clearance Checklist

Date of Revision –
12/3/14

Work site set-up and work execution

ACTIVITY	Yes	No	N/A	COMMENTS INCLUDING JUSTIFICATION IF RESPONSE IS NO OR NOT APPLICABLE
Daily site safety meeting conducted, SPSAs performed, JSAs reviewed, appropriate work permits obtained.				
HASP is available and reviewed by site workers / visitors.				
Subsurface Utility Clearance Procedure has been reviewed with all site workers.				
Work area secured; traffic control established as needed. Emergency shut-off switch located. Fire extinguishers / other safety equipment available as needed.				
Utility mark-outs (public / private) clear and visible. Provide Excavator's Stake-Out Reference Number / Request Date / Time.				
Tolerance zone work identified.				
Work execution plan reviewed and adhered to (ground disturbance methods, clearance depths, any special utility protection requirements, or any other execution requirements; especially for Tolerance Zone work).				
Verbal endorsement received from Roux PM for any required field deviations to work execution plan.				

Key reminders for execution:

The Subsurface Utility Clearance Protocol should be referenced to determine all requirements while executing subsurface work. The bullet points below are intended as general reminders only and should not be solely relied upon.

- Tolerance zone is defined as two feet plus half of the diameter or half of the greatest dimension (for elliptical sewers, duct banks and other non-cylindrical utilities) of a utility and two feet from the outside of any subsurface structure.
- Install Pre-Clearance exploratory test holes (e.g., hand-dug test holes or vacuum excavation) must be performed for the first five feet below land surface (BLS) at each location prior to conducting mechanized intrusive activities. The size of the pre-clearance exploratory test hole should be at a minimum twice the diameter of any downhole tool or boring device. (Note: Pre-clearance exploratory test holes should be defined in the SOW/proposal provided to the client to prevent project delays and to allow adequate time for PM and PP to evaluate alternative approaches for the project. Alternate approaches will need to be pre-approved by the OM.
- For excavations, all utilities need to be marked and then exposed by hand following the protocols in this program. Pre-clearing for excavations may be performed by the "moat" technique (i.e., soft

digging around the perimeter). In these cases, dig in small lifts (<12" for first five feet) using a dedicated spotter.) For Tolerance Zone work, unless otherwise agreed upon with the Utility Operator, work within the tolerance zone requires verification by means of hand-dug test holes to expose the utility. Once structures have been verified a minimum clearance of two feet must be maintained between the utility and any powered equipment.

Appendix D - Utility Verification/Site Walkthrough Record

Employee Name: _____


Date: _____

Instructions: For each utility suspected at the job site, indicate location on the job site, approximate burial depth, and means of detecting the utility. Leave blank if that utility is not believed to be present.


Utility	Description of Utility Location Identified Onsite	Approx. Depth (bls)	Method / Instrumentation used to determine Utility Location	Utility Owner Response (Date/Time)	Mark Out Indicates (Clear / Conflict)
Electrical Lines					
Gas Lines					
Pipelines					
Steam Lines					
Water Lines					
Sanitary and Stormwater Sewer lines					
Pressured Air-Lines					
Tank Vent Lines					
Fiber Optic Lines					
Underground Storage Tanks					
Phone Lines/ Other					

* bls - below land surface

Site Sketch Showing Utilities:

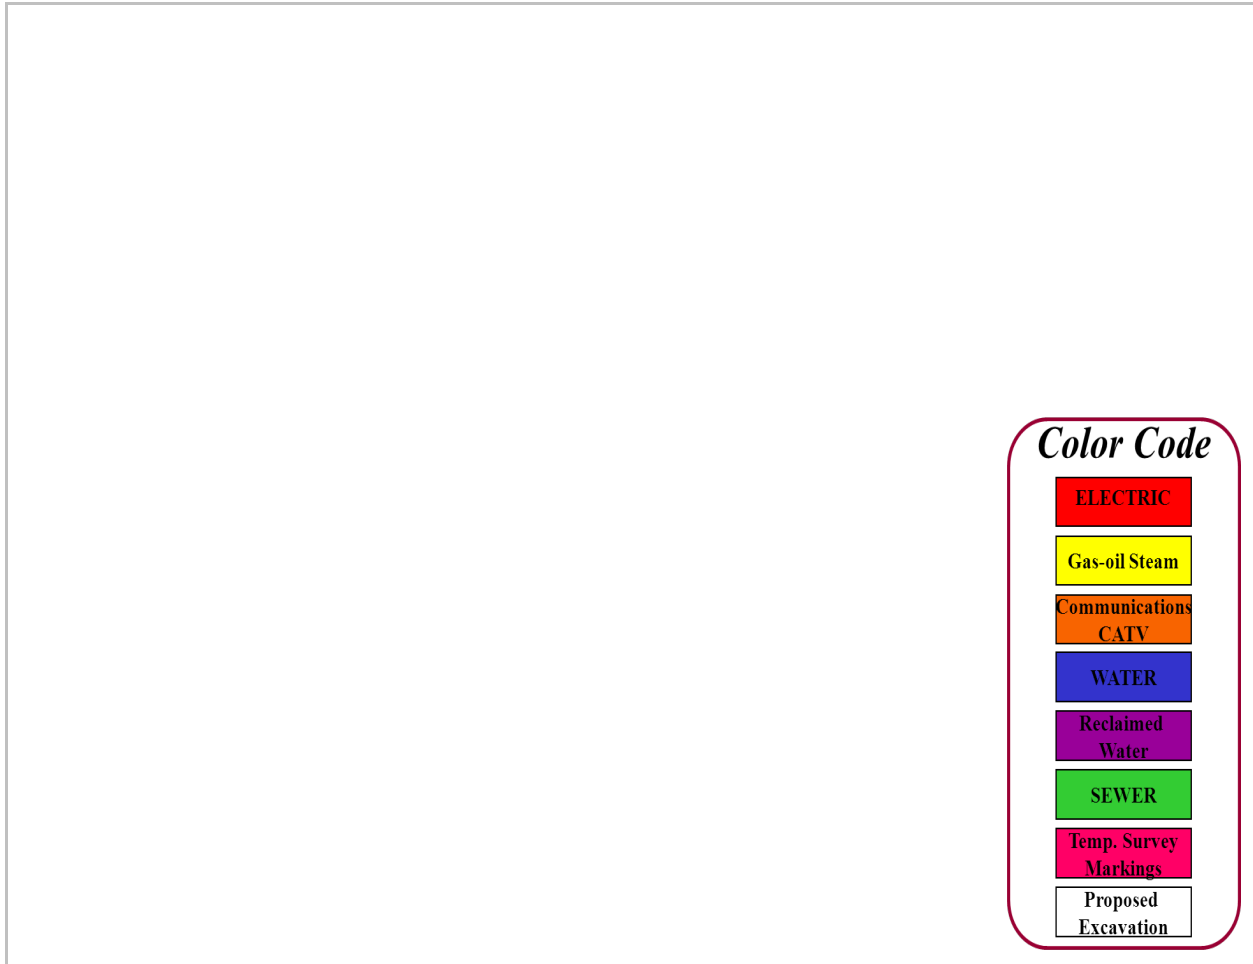***Color Code*****ELECTRIC****Gas-oil Steam****Communications
CATV****WATER****Reclaimed
Water****SEWER****Temp. Survey
Markings****Proposed
Excavation**

Other Comments / Findings:



Completed by: _____

Signature: _____ Date: _____

Personal Protective Equipment Management Program

PERSONAL PROTECTIVE EQUIPMENT MANAGEMENT PROGRAM

CORPORATE HEALTH AND SAFETY MANAGER : **Brian Hobbs, CIH, CSP**
EFFECTIVE DATE : **01/19**
REVISION NUMBER : **4**

TABLE OF CONTENTS

1. PURPOSE.....	1
2. SCOPE AND APPLICABILITY	1
3. PROCEDURES	1
3.1 Introduction	1
3.2 Types of PPE.....	1
3.3 Protective Clothing Selection Criteria	2
3.3.1 Chemicals Present	2
3.3.2 Concentration of the Chemical(s)	2
3.3.3 Physical State	3
3.3.4 Length of Exposure	3
3.3.5 Abrasion	3
3.3.6 Dexterity	3
3.3.7 Ability to Decontaminate	3
3.3.8 Climactic Conditions	3
3.3.9 Work Load	4
3.4 Types of Protective Materials	4
3.5 Protection Levels	4
3.5.1 Level A Protection	4
3.5.2 Level B Protection	5
3.5.3 Level C Protection.....	6
3.5.4 Level D Protection.....	6
3.5.5 Level E Protection	6
3.5.6 Additional Considerations	7

1. PURPOSE

Roux Associates, Inc. and its affiliated companies, Roux Environmental Engineering and Geology, D.P.C, and Remedial Engineering (collectively, "Roux") has instituted the following program to establish guidelines for the selection of personal protective equipment (PPE) for use by Roux personnel performing field activities in hazardous environments. PPE is not meant to be a substitute for engineering, work practice, and/or administrative controls, but PPE should be used in conjunction with these controls to protect the employees in the work place. Clothing, body coverings, and other accessories designed to prevent worker exposure to workplace hazards are all types of PPE. To ensure adequate PPE employee-owned PPE is evaluated on a case-by-case basis to insure its adequacy, maintenance and sanitation.

2. SCOPE AND APPLICABILITY

These guidelines apply to all PPE selection decisions to be made in implementing the Roux program. The foundations for this program are the numerous Occupational Health and Safety Administration (OSHA) standards related to PPE cited in 29 CFR 1910 Subpart I, 29 CFR 1926 Subpart E, and the hazardous environment work employee protection requirements under the OSHA Hazardous Waste Operations and Emergency Response (HAZWOPER) standard at 29 CFR 1910.120 and 1926.65. To ensure hazard assessments are documented the levels of protection, types of protection and tasks requiring protection are covered in site-specific Health and Safety Plans (HASPs) and Job Safety Analyses (JSAs).

3. PROCEDURES

Due to the varied nature of site activities and the different potential hazards associated with different sites, several aspects must be considered when selecting PPE. The following text describes PPE selection logic and provides guidelines and requirements for the appropriate selection and use of PPE.

3.1 Introduction

To harm the body, chemicals must first gain entrance. The intact skin and the respiratory tract are usually the first body tissues attacked by chemical contaminants. These tissues provide barriers to some chemicals but in many cases, are damaged themselves or are highly permeable by certain chemical compounds. Personal protective equipment therefore is used to minimize or eliminate chemical compounds coming into contact with these first barrier tissues.

The proper selection of equipment is important in preventing exposures. The PM making the selection will have to take several factors into consideration. The level of protection, type and kind of equipment selected depends on the hazardous conditions and in some cases cost, availability, compatibility with other equipment, and performance. An accurate assessment of all these factors must be made before work can be safely carried out.

3.2 Types of PPE

The type and selection of PPE must meet certain general criteria and requirements as required under OSHA 29 CFR 1910.132 and 1926.95. In addition to these general requirements, specific requirements and specifications exist for some types of PPE that form the basis of the protective clothing scheme. Following is a list of the common types of specific PPE and the specific requirements for the PPE type, where applicable:

1. Hard Hats - Regulated by 29 CFR 1910.135 and 1926.100; and, specified in ANSI Z89.1.

2. Face Shields and Safety Glasses - Regulated by 29 CFR 1910.133 and 1926.102; and, specified in ANSI Z87.1.
3. Respiratory Protection - Regulated by 29 CFR 1910.134 and 1926.103.
4. Hand Protection - Not specifically regulated.
5. Foot Protection - Regulated by 29 CFR 1910.136 and 1926.96; and, specified in ANSI Z41.1.
6. Protective Clothing (e.g., fully encapsulated suits, aprons) - Not specifically regulated.

3.3 Protective Clothing Selection Criteria

3.3.1 Chemicals Present

The most important factor in selecting PPE is the determination of what chemicals the employee may be exposed to. On field investigations, the number of chemicals may range from a few to several hundred. The exact chemicals or group of chemicals present at the site (certain groups tend to require similar protection) can be determined by collecting and analyzing samples of the air, soil, water, or other site media. When data are lacking, research into the materials used or stored at the site can be used to infer chemicals possibly on the site.

Once the known or suspected chemicals have been identified, and taking into consideration the type of work to be performed, the most appropriate clothing shall be selected.

Protective garments are made of several different substances for protection against specific chemicals. There is no universal protective material. All will decompose, be permeated by, or otherwise fail to protect under given circumstances. Fortunately, most manufacturers make guides to the use of their products (i.e., Dupont's Tyvek™ Permeation Guide). These guides are usually for gloves and coveralls and typically provide information regarding chemical degradation rates (failure of the material to maintain structural integrity when in contact with the chemical), and may provide information on the permeation rate (whether or not the material allows the chemical to pass through). When permeation tables are available, they shall be used in conjunction with degradation tables to determine the most appropriate protective material.

During most site work, chemicals are usually in mixed combinations and the protective materials are not in continuous contact with pure chemicals for long periods of time; therefore, the selected material may be adequate for the particular chemical and type of work being performed, yet not the "best" protecting material for all site chemicals and activities. Selection shall depend upon the most hazardous chemicals based on their hazards and concentrations. Sometimes layering, using several different layers of protective materials, affords the best protection.

3.3.2 Concentration of the Chemical(s)

One of the major criteria for selecting protective material is the concentration of the chemical(s) in air, liquid, and/or solid state. Airborne and liquid chemical concentrations should be compared to the OSHA standards and/or American Conference of Governmental Industrial Hygienists (ACGIH) and National Institute for Occupational Safety and Health (NIOSH) guidelines to determine the level of skin or other absorptive surface (e.g., eyes) protection needed. While these standards are not designed specifically for skin exposed directly to the liquid, they may provide skin designations indicative of chemicals known to have significant skin or dermal absorption effects. For example, airborne levels of PCB on-site may be

low because it is not very volatile, so the inhalation hazard may be minimal; however, PCB-containing liquid coming in direct contact with the skin may cause overexposure. Thus, PCB has been assigned a skin designation in both the OSHA and ACGIH exposure limit tables.

3.3.3 Physical State

The characteristics of a chemical may range from nontoxic to extremely toxic depending on its physical state. Inorganic lead in soil would not be considered toxic to site personnel, unless it became airborne, since it is generally not absorbed through the intact skin. Organic lead in a liquid could be readily absorbed. Soil is frequently contaminated with hazardous materials. Concentrations will vary from a few parts per million to nearly one hundred percent. The degree of hazard is dependent on the type of soil and concentration of the chemical. Generally speaking, "dry" soils do not cause a hazard to site personnel if they take minimal precautions such as wearing some type of lightweight gloves.

3.3.4 Length of Exposure

The length of time a material is exposed to a chemical increases the probability of breakthrough. Determinations of actual breakthrough times for short-term exposures indicate that several different materials can be used which would be considered inadequate under long-term exposures. It should be kept in mind that during testing, a pure (100% composition) liquid is usually placed in direct contact with the material producing a worst-case situation.

3.3.5 Abrasion

When selecting protective clothing, the job the employee is engaged in must be taken into consideration. Persons moving drums or performing other manual tasks may require added protection for their hands, lower chest and thighs. The use of leather gloves and a heavy apron over the other normal protective clothing will help prevent damage to the normal PPE and thus reduce worker exposures.

3.3.6 Dexterity

Although protection from skin and inhalation hazards is the primary concern when selecting PPE, the ability to perform the assigned task must be maintained. For example, personnel cannot be expected to perform work that requires fine dexterity if they must wear a thick glove. Therefore, the PPE selection process must consider the task being performed and provide PPE alternatives or techniques that allow dexterity to be maintained while still protecting the worker (e.g., wearing tight latex gloves over more bulky hand protection to increase dexterity).

3.3.7 Ability to Decontaminate

If disposable clothing cannot be used, the ability to decontaminate the materials selected must be taken into consideration. Once a chemical contacts the material, it must be cleaned before it can be reused. If the chemical has completely permeated the material, it is unlikely that the clothing can be adequately decontaminated and the material should be discarded.

3.3.8 Climactic Conditions

The human body works best with few restraints from clothing. Protective clothing adds a burden by adding weight and restricting movement as well as preventing the natural cooling process. In severe situations, a modified work program must be used.

Some materials act differently when they are very hot and very cold. For example, PVC becomes almost brittle in very cold temperatures. If there are any questions about the stability of the protective materials under different conditions, the manufacturer should be contacted.

3.3.9 Work Load

Like climactic conditions, the type of work activity may affect work duration and the ability of personnel to perform certain tasks. Similarly, the amount of protective materials a person wears will affect their ability to perform certain tasks. For example, a person in a total encapsulating suit, even at 72 °F, cannot work for more than a short period of time without requiring a break.

The work schedule should be adjusted to maintain the health of the employees. Special consideration should be given to the selection of clothing that both protects and adds the least burden when personnel are required to perform strenuous tasks. Excessive bodily stress frequently represents the most significant hazard encountered during field work.

3.4 Types of Protective Materials

1. Cellulose or Paper
2. Natural and Synthetic Fibers
 - a. Tyvek™
 - b. Nomex™
3. Elastomers
 - a. Polyethylene
 - b. Saran
 - c. Polyvinyl Chloride (PVC)
 - d. Neoprene
 - e. Butyl Rubber
 - f. Viton

3.5 Protection Levels

3.5.1 Level A Protection

Level A protection (a fully encapsulated suit) is used when skin hazards exist or when there is no known data that positively rule out skin and other absorption hazards. Since Level A protection is extremely physiologically and psychologically stressful, the decision to use this protection must be carefully considered. At no time will Level A work be performed without the consent of the OM. The following conditions suggest a need for Level A protection:

- confined facilities where probability of skin contact is high;
- sites containing known skin hazards;
- sites with no established history to rule out skin and other absorption hazards;
- atmosphere immediately dangerous to life and health (IDLH) through the skin absorption route;
- site exhibiting signs of acute mammalian toxicity (e.g., dead animals, illnesses associated with past entry into site by humans);

- sites at which sealed drums of unknown materials must be opened;
- total atmospheric readings on the Photoionization Detector (PID), Flame Ionization Detector (FID), and similar instruments indicate 500 to 1,000 ppm of unidentified substances; and
- extremely hazardous substances (e.g., cyanide compounds, concentrated pesticides, Department of Transportation Poison "A" materials, suspected carcinogens and infectious substances) are known or suspected to be present and skin contact is possible.

The following items constitute Level A protection:

- open circuit, pressure-demand self-contained breathing apparatus (SCBA);
- totally encapsulated suit;
- gloves, inner (surgical type);
- gloves, outer;
- chemical protective;
- boots, chemical protective, steel toe and shank;
- radiation detector (if applicable); and
- communications.

3.5.2 Level B Protection

Level B protection is utilized when the highest level of respiratory protection is needed but hazardous material exposure to the few unprotected areas of the body is unlikely.

The following conditions suggest a need for Level B protection:

- the type and atmospheric concentration of toxic substances have been identified and they require the highest level of respiratory protection;
- IDLH atmospheres where the substance or concentration in the air does not present a severe skin hazard;
- the type and concentrations of toxic substances do not meet the selection criteria permitting the use of air purifying respirators; and
- it is highly unlikely that the work being done will generate high concentrations of vapors, gases or particulates, or splashes of materials that will affect the skin of personnel.

Personal protective equipment for Level B includes:

- open circuit, pressure-demand SCBA;
- chemical protective clothing:
- overalls and long-sleeve jacket; or
- coveralls;
- gloves, inner (surgical type); gloves, outer, chemical protective;
- boots, chemical protective, steel toe and shank; and
- communications optional.

3.5.3 Level C Protection

Level C protection is utilized when both skin and respiratory hazards are well defined and the criteria for the use of negative pressure respirators have been fulfilled (i.e., known contaminants and contaminant concentrations, acceptable oxygen levels, approved filter/cartridge available, known cartridge service life, etc.). Level C protection may require carrying an emergency escape respirator during certain initial entry and site reconnaissance situations, or when applicable thereafter.

Personal protective equipment for Level C typically includes:

- full facepiece air-purifying respirator;
- emergency escape respirator (optional);
- chemical protective clothing:
 - overalls and long-sleeved jacket; or
 - coveralls;
- gloves, inner (surgical type);
- gloves, outer, chemical protective; and
- boots, chemical protective, steel toe and shank.

3.5.4 Level D Protection

Level D is the basic work uniform. Personal protective equipment for Level D includes:

- coveralls;
- safety boots/shoes;
- eye protection;
- hand protection;
- reflective traffic safety vest (mandatory for traffic areas or railyard);
- hard hat (with face shield is optional); and
- emergency escape respirator is optional.

3.5.5 Level E Protection

Level E protection is used when radioactivity above 10 mr/hr is detected at the site. Personal protective equipment for Level E includes:

- coveralls;
- air purifying respirator;
- time limits on exposure;
- appropriate dermal protection for the type of radiation present; and
- radiation dosage monitoring.

3.5.6 Additional Considerations

Field work will contain a variety of situations due to chemicals in various concentrations and combinations. These situations may be partially ameliorated by following the work practices listed below:

1. Some sort of foot protection is needed on a site. If the ground to be worked on is contaminated with liquid and it is necessary to walk in the chemicals, some sort of protective "booties" can be worn over the boots. This cuts down on decontamination requirements. They are designed with soles to help prevent them from slipping around. If non-liquids are to be encountered, a Tyvek™ bootie could be used. If the ground contains any sharp objects, the advantage of booties is questionable. Boots should be worn with either cotton or wool socks to help absorb the perspiration.
2. If the site situation requires the use of hard hats, chin straps should be used if a person will be stooping over where his/her hat may fall off. Respirator straps should not be placed over the hard hats. This will affect the fit of the respirator.

Some types of protective materials conduct heat and cold readily. In cold conditions, natural material clothing should be worn under the protective clothing. Protective clothing should be removed prior to allowing a person "to get warm". Applying heat, such as a space heater, to the outside of the protective clothing may drive the contaminants through. In hot weather, under clothing will absorb sweat. It is recommended that workers use all cotton undergarments.

3. Body protection should be worn and taped to prevent anything from running into the top of the boot. Gloves should be worn and taped to prevent substances from entering the top of the glove. Duct tape is preferred, but masking tape can be used. When aprons are used, they should be taped across the back for added protection. However, this should be done in such a way that the person has mobility.
4. Atmospheric conditions such as precipitation, temperature, wind direction, wind velocity, and pressure determine the behavior of contaminants in air or the potential for volatile material getting into the air. These parameters should be considered in determining the need for and the level of protection.
5. A program must be established for periodic monitoring of the air during site operations. Without an air monitoring program, any changes would go undetected and might jeopardize response personnel. Monitoring can be done with various types of air pumps and filtering devices followed by analysis of the filtration media; personnel dosimeters; and periodic walk-throughs by personnel carrying real-time survey instruments.
6. For operations in the exclusion zone, different levels of protection may be selected, and various types of chemical-resistant clothing may be worn. This selection should be based on the job function, reason for being in the area, and the potential for skin contact with, or inhalation of, the chemicals present.
7. Escape masks must be readily available when levels of respiratory protection do not include a SCBA and the possibility of an IDLH atmosphere exists. Their use can be made on a case-by-case basis. Escape masks could be strategically located at the site in areas that have higher possibilities of vapors, gases or particulates.

Generic Community Air Monitoring Plan (CAMP)

APPENDIX G

New York State Department of Health Generic Community Air Monitoring Plan

Overview

A Community Air Monitoring Plan (CAMP) requires real-time monitoring for volatile organic compounds (VOCs) and particulates (i.e., dust) at the downwind perimeter of each designated work area when certain activities are in progress at contaminated sites. The CAMP is not intended for use in establishing action levels for worker respiratory protection. Rather, its intent is to provide a measure of protection for the downwind community (i.e., off-site receptors including residences and businesses and on-site workers not directly involved with the subject work activities) from potential airborne contaminant releases as a direct result of investigative and remedial work activities. The action levels specified herein require increased monitoring, corrective actions to abate emissions, and/or work shutdown. Additionally, the CAMP helps to confirm that work activities did not spread contamination off-site through the air.

The generic CAMP presented below will be sufficient to cover many, if not most sites. Specific requirements should be reviewed for each situation in consultation with NYSDOH to ensure proper applicability. In some cases, a separate site-specific CAMP or supplement may be required. Depending upon the nature of contamination, chemical-specific monitoring with appropriately sensitive methods may be required. Depending upon the proximity of potentially exposed individuals, more stringent monitoring or response levels than those presented below may be required. Special requirements will be necessary for work within 20 feet of potentially exposed individuals or structures and for indoor work with co-located residences or facilities. These requirements should be determined in consultation with NYSDOH.

Reliance on the CAMP should not preclude simple, common-sense measures to keep VOCs, dust, and odors at a minimum around the work areas.

Community Air Monitoring Plan

Depending upon the nature of known or potential contaminants at each site, real-time air monitoring for VOCs and/or particulate levels at the perimeter of the exclusion zone or work area will be necessary. Most sites will involve VOC and particulate monitoring; sites known to be contaminated with heavy metals alone may only require particulate monitoring. If radiological contamination is a concern, additional monitoring requirements may be necessary per consultation with appropriate DEC/NYSDOH staff.

Continuous monitoring will be required for all ground intrusive activities and during the demolition of contaminated or potentially contaminated structures. Ground intrusive activities include, but are not limited to, soil/waste excavation and handling, test pitting or trenching, and the installation of soil borings or monitoring wells.

Periodic monitoring for VOCs will be required during non-intrusive activities such as the collection of soil and sediment samples or the collection of groundwater samples from existing monitoring wells. "Periodic" monitoring during sample collection might reasonably consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. In some instances, depending upon the proximity of potentially exposed individuals, continuous monitoring may be required during sampling activities. Examples of such situations include groundwater sampling at wells on the curb of a busy urban street, in the midst of a public park, or adjacent to a school or residence.

VOC Monitoring, Response Levels, and Actions

Volatile organic compounds (VOCs) must be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis or as otherwise specified. Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions, particularly if wind direction changes. The monitoring work should be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment should be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment should be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

1. If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
2. If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
3. If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.
4. All 15-minute readings must be recorded and be available for State (DEC and NYSDOH) personnel to review. Instantaneous readings, if any, used for decision purposes should also be recorded.

Particulate Monitoring, Response Levels, and Actions

Particulate concentrations should be monitored continuously at the upwind and downwind perimeters of the exclusion zone at temporary particulate monitoring stations. The particulate monitoring should be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment must be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during all work activities.

1. If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m³) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques must be employed. Work may continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed 150 mcg/m³ above the upwind level and provided that no visible dust is migrating from the work area.
2. If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than 150 mcg/m³ above the upwind level, work must be stopped and a re-evaluation of activities initiated. Work can resume provided that dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within 150 mcg/m³ of the upwind level and in preventing visible dust migration.
3. All readings must be recorded and be available for State (DEC and NYSDOH) and County Health personnel to review.

Health and Safety Meeting/Daily Meeting Log

HEALTH AND SAFETY BRIEFING / TAILGATE MEETING FORM

Site Name / Location: _____

Date: _____ Weather Forecast: _____

Names of Personnel Attending Briefing:

_____	_____	_____
_____	_____	_____
_____	_____	_____

Planned Work:

Instrument Calibration: Instrument/Time/Cal. Gas/Cal. Concentration/Actual Concentration

Items Discussed:

Work Permit Type and Applicable Restrictions:


Signatures of Attending Personnel:

_____	_____	_____
_____	_____	_____
_____	_____	_____


Interim Remedial Measure Work Plan
94-17 63rd Drive, Rego Park, New York

DRAWING

Sub-Slab Depressurization System Plan and Details

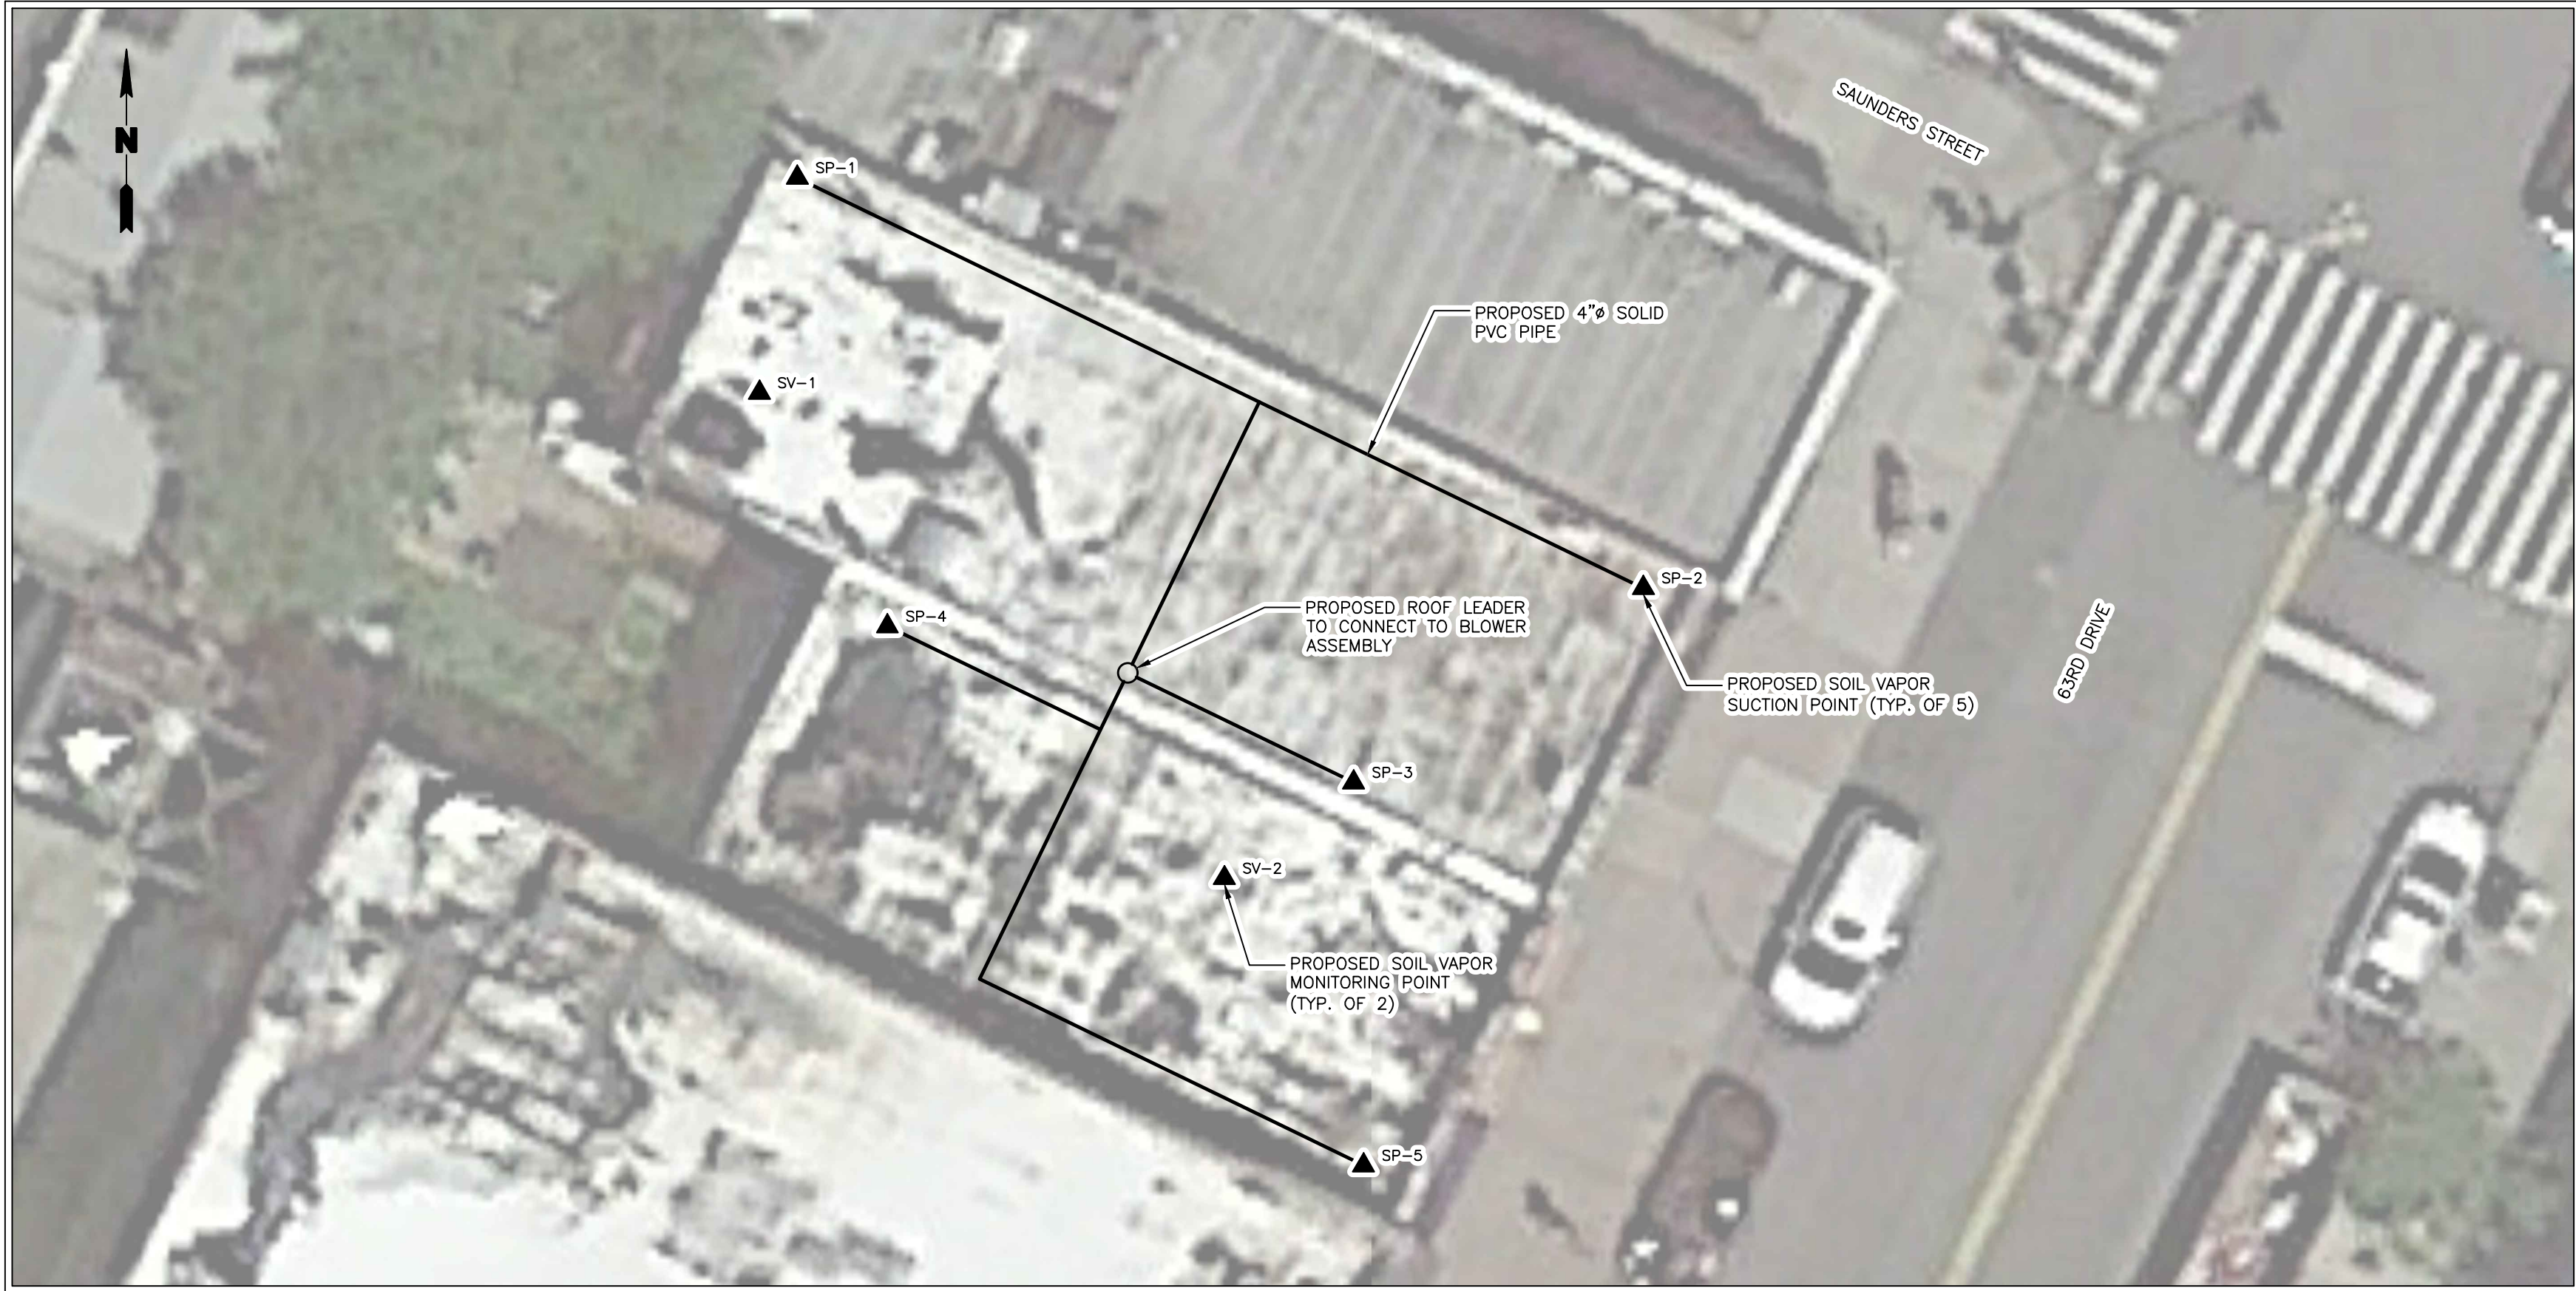


SUB-SLAB DEPRESSURIZATION SYSTEM
SCALE: 1" = 10'

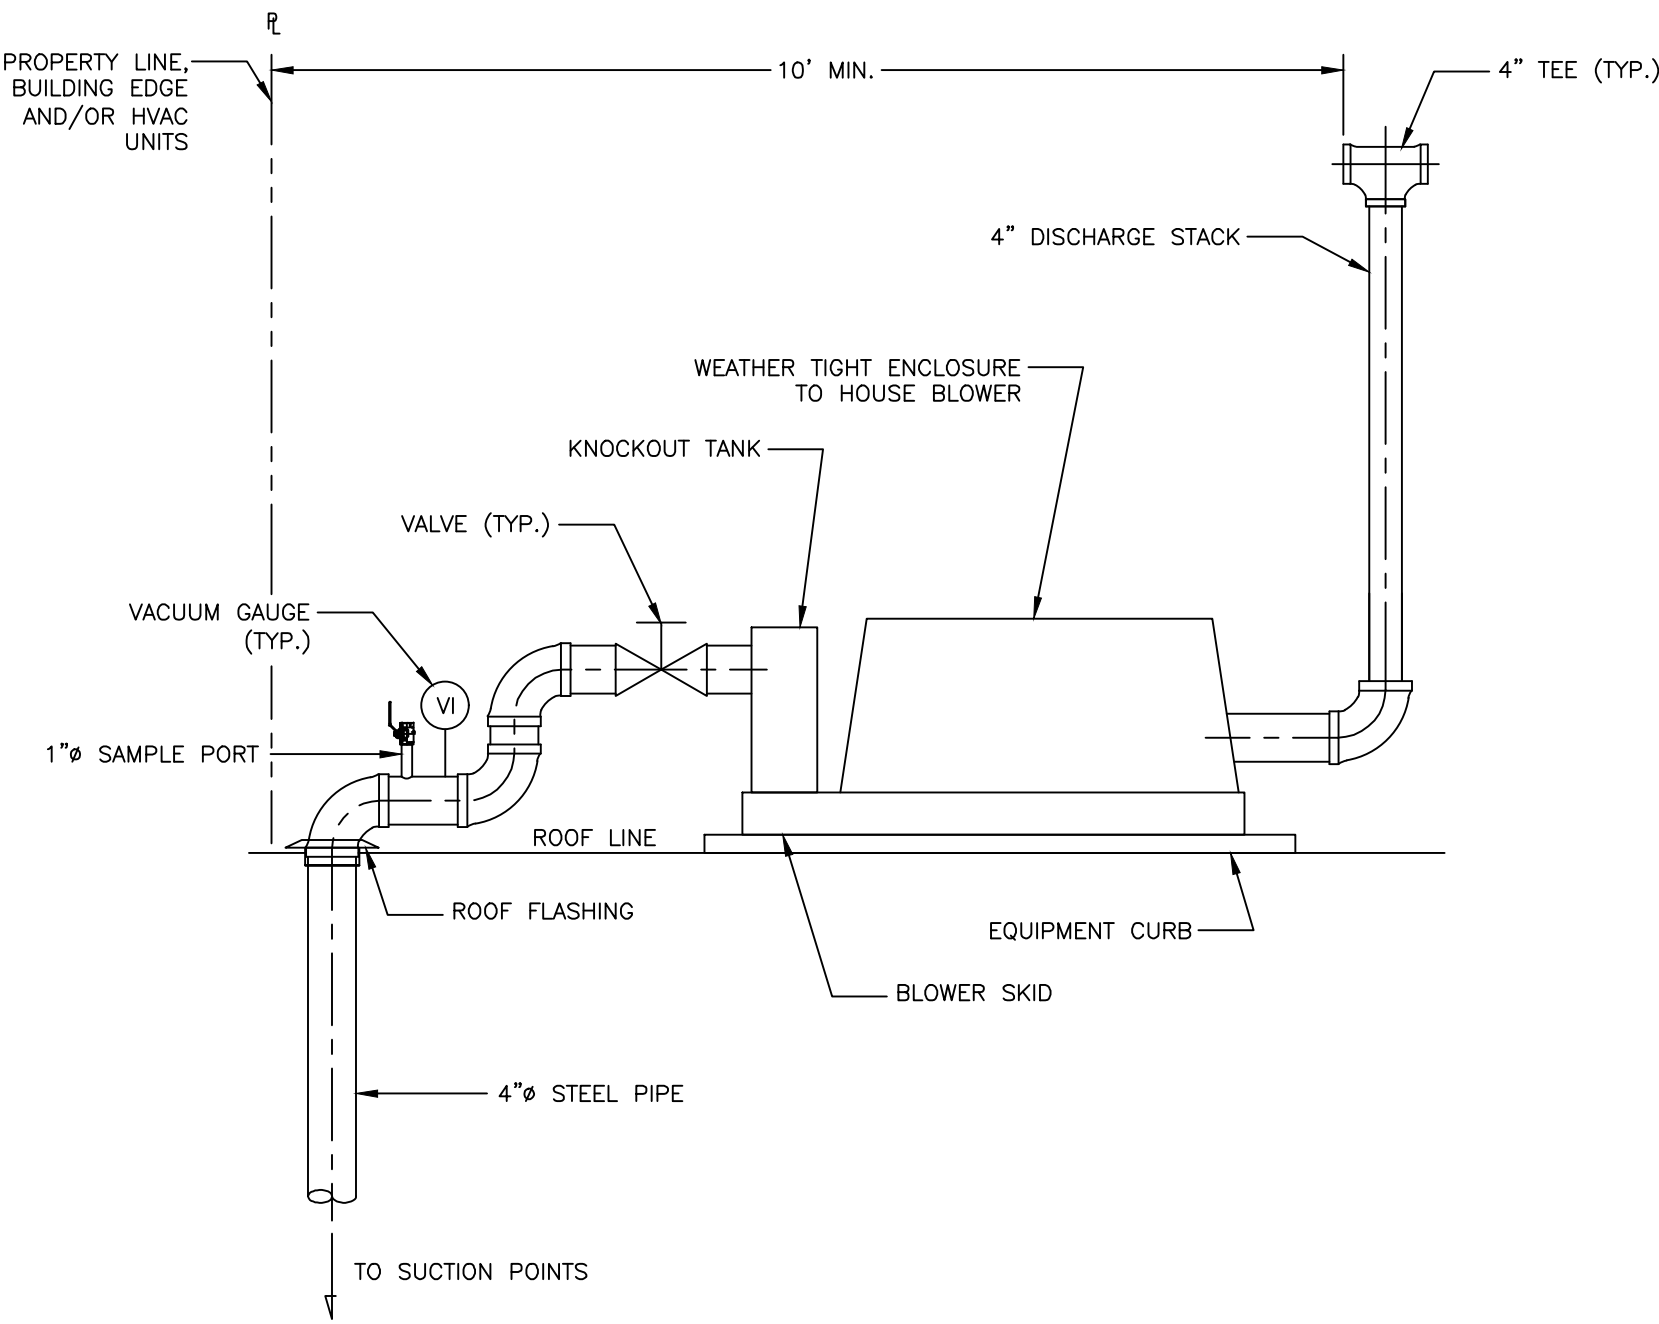


- BLOWER NOTES**
1. PROVIDE ELECTRICAL/CONTROL CONDUIT TO BLOWERS. COORDINATE WITH ELECTRICAL CONTRACTOR.
 2. THE BLOWER DISCHARGES SHALL BE LOCATED A MINIMUM OF 10 FEET FROM HVAC AIR INLETS, AND PROPERTY LINE.
 3. THE BLOWER SHALL BE PROVIDED WITH A WEATHER TIGHT ENCLOSURE GASHO ALUMINUM CUSTOM ENCLOSURE OR APPROVED EQUAL.
 4. THE BLOWER SKIDS SHALL INCLUDE WEATHER TIGHT ENCLOSURE, PLASTIC KNOCKOUT TANK (WITH HIGH LEVEL ALARM), VACUUM RELIEF VALVE, LOW VACUUM SWITCH, GAUGES, AND INTERCONNECTING PIPING/FITTINGS.
 5. A CONTROL PANEL SHALL BE PROVIDED WITH THE BLOWER SKIDS. THE CONTROL PANEL SHALL HAVE GREEN OPERATING LIGHTS AND RED ALARM LIGHTS. THE CONTROL PANEL SHALL HAVE AN ALARM FOR WATER LEVEL IN KNOCKOUT TANK, LOW VACUUM AND NO POWER. THE ALARM SIGNAL SHALL BE SENT TO AN APPROPRIATE LOCATION IN THE PROPOSED BUILDING (I.E., SUPERINTENDENT'S OFFICE) AND SHALL ALSO BE AUDIBLE.
 6. BLOWER SHALL BE PROVIDED WITH A REMOTE ALARM CAPABLE OF ALERTING THE OWNER OF A SYSTEM SHUTDOWN OR LOW VACUUM CONDITION VIA PHONE OR TEXT MESSAGE
 7. PROVIDE ALL NECESSARY PIPE SUPPORTS FOR RISERS FROM THE BASEMENT SLAB TO THE BLOWERS ON THE ROOF.


3 TYPICAL BLOWER DETAIL
SCALE: NOT TO SCALE

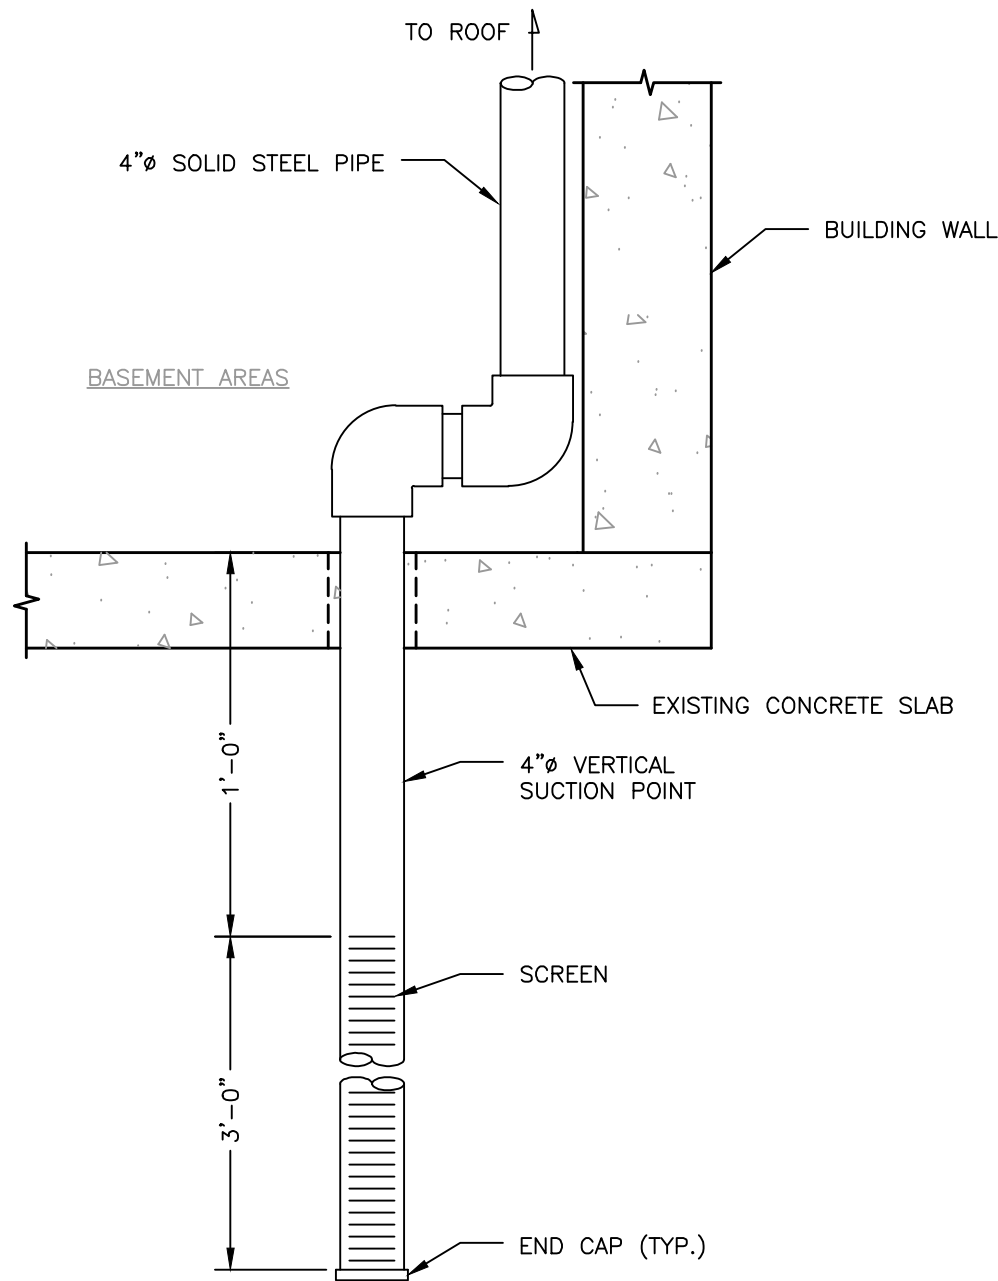

1 TYPICAL VERTICAL SUCTION POINT DETAIL
SCALE: NOT TO SCALE

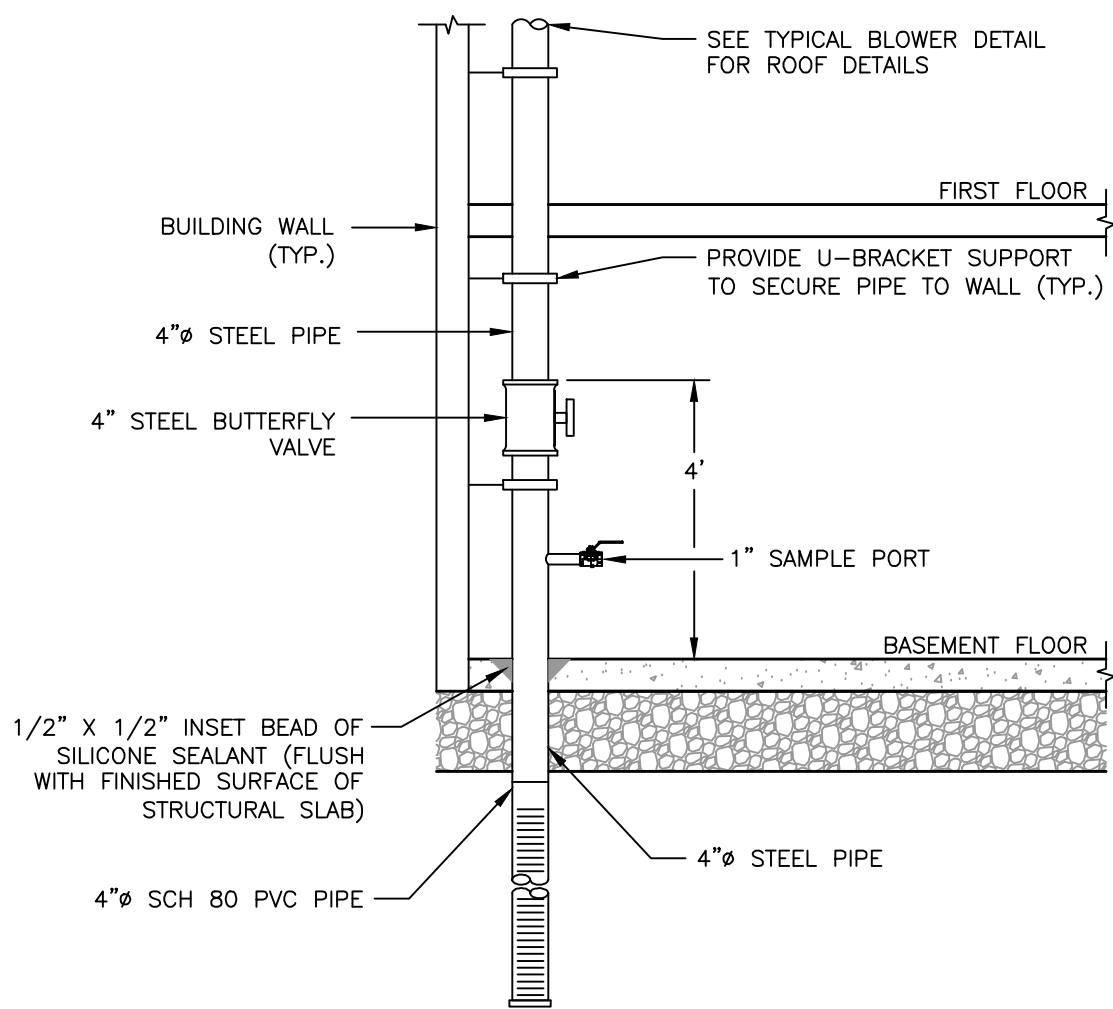

2 TYPICAL RISER DETAIL
SCALE: NOT TO SCALE

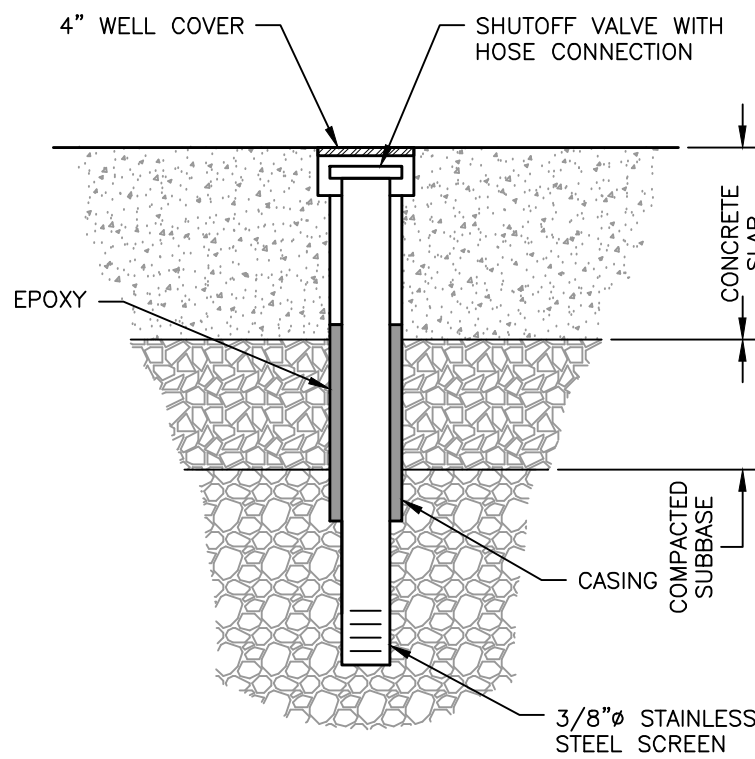

4 TYPICAL SOIL VAPOR MONITORING POINT DETAIL
SCALE: NOT TO SCALE

V:\CAD\PROJECTS\3316\0001Y101\3316.0001Y101.01.DWG

NO.	DATE	REVISION DESCRIPTION	INT.

UNAUTHORIZED ALTERATION OR ADDITION TO THIS DOCUMENT IS A VIOLATION OF STATE LAW.

THESE DOCUMENTS (OR COPIES OF ANY THEREOF) PREPARED BY OR BEARING THE SEAL OF THE ENGINEER, SHALL NOT BE REUSED FOR ANY EXTENSIONS OF THE PROJECT OR ANY OTHER PROJECT WITHOUT THE WRITTEN CONSENT OF THE ENGINEER.

PROJ. ENGINEER: D.E.K.	DRAWN BY: G.M.
DESIGNED BY: R.M.	CHECKED BY: C.M.
DRAWING SCALE: AS SHOWN	PLOT SCALE: 1:1
DRAWING DATE: 18JUN19	PRINT TYPE: B&W
OFFICE: NY	PAPER SIZE: ARCH D
PROJECT NO.: 3316.0001Y000	
DRAWING FILE: 3316.0001Y101.01.DWG	

ROUX

Roux Environmental
Engineering & Geology, D.P.C.
209 SHAFTER STREET ISLANDIA NEW YORK 11749
(631) 232-2600

PROJECT NAME:
94-17 63RD DRIVE
REGO PARK, QUEENS

PROJECT FOR:
ARBERN QUEENS COMMERCIAL PROPERTIES LLC

TITLE:
SUB-SLAB DEPRESSURIZATION
SYSTEM PLAN AND DETAILS