

# **Interim Remedial Measure Workplan For Outfalls 4 and 7 Westchester County Airport White Plains, New York**

**September 2020**

**Prepared for: Westchester County  
240 Airport Road  
White Plains, New York 10601**

**Prepared by: First Environment, Inc.  
10 Park Place  
Building 1A, Suite 504  
Butler, New Jersey 07405**



## TABLE OF CONTENTS

Introduction .....	1
Site Topography & Drainage .....	5
Topography.....	5
Surface/Stormwater Drainage .....	5
Surface Water Findings.....	6
Investigation.....	6
Geology/Hydrogeology.....	9
Previous Burn Pit Activities .....	10
Reliability of Data Overview .....	12
Health & Safety.....	13
Community Air Monitoring Plan.....	14
Quality Assurance Project Plan (QAPP).....	15
Data Validation.....	15
Scope-of-Work.....	16
Phase I - Data Collection and Evaluation .....	17
Storm Sewer Investigation.....	18
Outfall Flow and Rainfall Data Collection.....	18
Stream Mapping & Surface Water Assessment.....	19
Surface Water and Groundwater Data Collection .....	21
Shallow Monitoring Well Installation .....	21
Groundwater Monitoring.....	21
Phase II – IRM Evaluation and Implementation.....	22
Storm Sewer Modification.....	22
Storm Sewer Realignment.....	24
Treatment of PFAS.....	24
Performance Monitoring .....	25
Schedule.....	26
References .....	27

## TABLES

TABLE 1	April 2, 2019 PFAS Surface Water Results
TABLE 2	OF-7 2019 PFAS Water & Rainfall Results
TABLE 3	June 12-13 2019 PFAS Drain Water Results
TABLE 4	Work Activity Schedule & Completion Percentage
TABLE 5	Sample Location, Media, Laboratory Analysis

## FIGURES

FIGURE 1	Site Topographic Location Map
FIGURE 2	Surface Water Drainage Map
FIGURE 3	Outfall Location Map
FIGURE 4	PFOS/PFOA Surface water Concentrations
FIGURE 5	Storm Sewer Investigation Map
FIGURE 6	OF-7 Water Outflow.....8
FIGURE 7	Surface Water Sample & Staff Gauge Locations
FIGURE 8	Stormwater Replacement Location Map
FIGURE 9	Storm Sewer Sample Locations
FIGURE 10	Injection PFAS Treatment Area

## APPENDIX

Appendix A	OF-7 Catch Basin & Storm System Drawing
Appendix B	Health & Safety Plan
Appendix C	Community Air Monitoring Plan (CAMP)
Appendix D	Quality Assurance Project Plan

## CERTIFICATION STATEMENT

I, Bernard T. Delaney, Ph.D., P.E., BCEE, certify that I am currently a Registered Professional Engineer as defined in 6 NYCRR Part 375 and this this Shallow Groundwater Interim Remedial Measure Workplan was prepared in accordance with all applicable statutes and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10).

060784-1  
NY Professional  
Engineer No.

09/17/2020  
Date

  
B. Tod Delaney, Ph.D., P.E., BCEE

## Introduction

First Environment, Inc. (First Environment) has been retained by the Westchester County Department of Public Works and Transportation (WCDPWT) to prepare an Interim Remedial Measure (IRM) Workplan for Outfalls (OF) 4 and 7, located at the Westchester County Airport (the "Airport" or "Site"). The results of prior sampling revealed elevated concentrations of perfluorooctane sulfonate (PFOS) and perfluorooctanoic acid (PFOA) at OF-7 and to a much lesser degree at OF-4. (PFOS and PFOA are two of approximately 4,500 man-made chemicals grouped as per- and polyfluoroalkyl substances (PFAS).) As such, the New York State Department of Environment Conservation (NYSDEC) is requiring the implementation of an IRM to address these perceived to be elevated concentrations. (See, NYSDEC letter dated August 7, 2019.) The combined PFOA/PFOS concentration identified at OF-7 was 4,565 parts per trillion (ppt) and 33 ppt at OF-4. During initial discussions with the NYSDEC and County, First Environment proposed directing drain water from OF-7 to an open catch basin. It was determined during that meeting with the Airport that redirecting drain water from OF-7 to an open catch basin is not a viable option due to the potential of creating a surface water body in the basin that would attract waterfowl and birds of prey that could increase the risk and threat to air traffic safety.

Due to the elevated PFOA/PFOS concentrations at OF-7, the primary focus of this IRM is to reduce elevated PFOA/PFOS concentrations in drainage water at OF-7 to acceptable levels protective of Rye Lake. A combination of PFAS contaminated groundwater is mixing with clean rainwater leading to OF-7 producing elevated PFOA/PFOS levels at OF-7. The water mixing in storm sewers is referred to as "drain water" in the workplan. It is First Environment's opinion that the approach set forth to separate groundwater and rainwater entering the storm sewer in this workplan will be protective of Rye Lake without the need and implementation of a Granular Activated Carbon (GAC) Resin treatment system. Once the IRM has been implemented, First Environment will provide performance monitoring to demonstrate the IRM is protective of Rye Lake. If the implementation of the activities described herein are deemed not protective, then other IRM alternatives will be considered at that time.

Water leaving OF-4 connects with two, or possibly three, tributaries (unnamed streams) leaving the Airport before entering Rye Lake. Further investigation is necessary to gain a more complete understanding of the source, migration, and extent of the PFOA/PFOS

contamination before a reasonable and appropriate evaluation of IRM alternatives can be undertaken and ultimately implemented, as necessary.

It should also be noted that First Environment believes the remediation of the former New York Air National Guard (NYANG) Burn Pit source area will provide the greatest benefit in reducing site-wide PFAS concentrations in surface water and groundwater in the area of OF-4 and SW-1. The Groundwater IRM will be updated to provide a discussion and list of activities that will be necessary to provide the information to support an interim remedial measure for groundwater. Since groundwater PFAS concentrations reflect closely to those observed in surface water, First Environment believes a groundwater IRM at the former NYANG Burn Pit should reduce PFAS concentrations in groundwater at the source area, and in turn reduce PFAS concentrations in groundwater and surface water downgradient leaving OF-7/OF-4 .

First Environment will conduct a Pilot Test followed by monitoring to determine the effectiveness of using PlumeStop to reduce the PFOA/PFOS concentrations that are migrating from the Airport as measured at SW-2. PlumeStop is activated carbon in liquid form that can be injected or mixed into the subsurface as a means of reducing PFAS concentrations from groundwater/seeps. At the present time, a GAC/resin-based treatment system is not considered practical for application in the area of OF-4 and downgradient due to multiple tributaries that leave the airport and appear to connect before entering Rye Lake.

As indicated, this IRM Workplan has been developed to specifically address discharge from OF-4 and OF-7 that may potentially impact Rye Lake. A subsequent IRM for groundwater was prepared and submitted to the NYSDEC to address PFOA/PFOS in groundwater. The plan was conditionally approved in June 2020 upon final modification. The final groundwater IRM was submitted to the NYSDEC in July 2020.

The Site is located at 240 Airport Road in White Plains, Westchester County, New York and encompasses 689 acres. The NYANG was a tenant at the Airport from 1947 to 1983. As part of its operations, the NYANG performed aircraft firefighting training operations on a regular basis. These firefighting exercises and training activities were performed at a "Burn Pit" that was located near the NYANG's former hanger (hereafter referred to as the "NYANG Burn Pit") on County property adjacent to the NYANG's leasehold.

The NYANG conducted these exercises from as early as 1968 until 1983 when they vacated the Airport. The NYANG, as part of its firefighting exercises, used Aqueous Film-Forming Foam (AFFF), which historically contained PFAS. Only recently has there been a reduction in the use of PFAS chemicals in AFFF. The duration of AFFF use at the NYANG Burn Pit and the fact that the NYANG Burn Pit was unlined resulted in groundwater at this location exhibiting the highest concentrations of PFAS at the Site. Based on this finding, the Burn Pit has been identified as the primary source area for PFAS.

This IRM workplan has been prepared in accordance with the provisions of an Order of Consent (CO3-20180308-44) between Westchester County (the County) and the NYSDEC executed on June 6, 2019. The NYSDEC defines an IRM as a discrete set of planned actions for both emergency and non-emergency situations that can be conducted without the extensive investigation and evaluation of a Remedial Investigation/Feasibility Study (RI/FS).

Accordingly, this workplan presents the planned actions to comply with the NYSDEC letter dated August 7, 2019 and subsequent correspondence in late August with the NYSDEC. The activities will be completed in a phased approach and where possible, concurrently. The first phase involves the collection and evaluation of specific data necessary, including pilot tests, to evaluate and guide the design of the IRM. Specifically, the data will be collected in and around the area of outfalls OF-4 and OF-7. The second phase will incorporate the information obtained during the initial phase to evaluate potential modifications to the drainage system and design and implement an IRM. The primary objective of the IRM will be to reduce, to the extent practical, the elevated levels of PFOA/PFOS leaving the Airport through OF-7, which drains surface and groundwater from the vicinity of the former NYANG Burn Pit area. Once a thorough understanding of the drain water flow leaving OF-7 (including both surface water and groundwater), the interaction of groundwater and the drainage system, and its effects on PFOA/PFOS concentrations has been achieved, then the drain system can be modified to reduce PFOA/PFOS from entering the storm sewer system which ultimately discharge to Rye Lake. It is important to note that the United States Environmental Protection Agency (US EPA) established a drinking water health advisory level (HAL) concentration for combined PFOS and PFOA of 70 ppt. In April 2019, surface water sampled at OF-4 (SW-4) and a ditch (SW-3) leaving the Airport revealed concentrations of PFOS/PFOA below the 70 ppt health advisory level. Note, however, the State has not determined whether it will use EPA's HAL to evaluate site conditions, IRMs, or other work at the site.

Based on the low concentrations currently identified at both locations, it is First Environment's opinion an IRM may not be necessary or practical at either location; however, this area will be investigated and evaluated further as part of this IRM to verify this opinion is supportable. To support the implementation of an IRM, First Environment will further investigate and analyze water at OF-4 as well as investigate, map, and analyze surface water for PFAS at other unnamed stream tributaries that appear to combine at a downgradient location (E11) before discharging to Rye Lake. The objective of this further evaluation is to determine the nature and extent of PFOS/PFOA at outfall OF-4 as well as other tributaries. To further evaluate the presence and migration pathway for PFAS at Hanger E in groundwater, which is possibly a pathway to OF-4, surface water samples will be collected for PFAS analysis in this area.

The combined PFOA and PFOS concentration at the foot of the mound at SW-2 was 144 ppt. As part of the IRM, First Environment will conduct an evaluation and pilot test that will inject and/or blend PlumeStop at the foot of the mound in groundwater to reduce the concentrations of PFAS leaving the Airport. The mound is believed to be an area where debris may have been historically placed, although First Environment has reviewed no direct evidence to support any dumping in this area. Based on previous investigations at the mound, no contaminants of concern, other than PFAS, have been identified in groundwater or surface water except for flocculated iron that has precipitated on surface water/seeps at the base of the mound. First Environment observed no signs of the flocculated iron migrating off the Airport property. If pilot testing is successful, an expanded treatment area will be evaluated to assess the efficacy of expanding the use of PlumeStop.

# Site Topography & Drainage

## Topography

The Site is located at 240 Airport Road, White Plains, Westchester County, New York in a mixed-use area of commercial and residential parcels and has been assigned Site No. 360174 by the NYSDEC. The location of the Site is illustrated on the United States Geological Survey (USGS) 7.5-minute Quadrangle (Glenville NY Topographic Quadrangle, 1967, Photorevised 1981) Map provided as Figure 1. The Site is approximately 700 acres, with about a third of the Airport located in the Kenisco watershed, as shown on Figure 2.

The topography at the Airport is generally flat and slopes gently to the south. The elevation at the northern end of the Project Area is approximately 425 feet above mean sea level (msl) and slopes to 375 feet above msl at the southern extent of the Airport property. The surface elevation of Rye Lake is approximately 354 feet above msl. This area is comprised primarily of woodlands and includes Route 120 and Interstate 684.

## Surface/Stormwater Drainage


The Airport's surface/stormwater collection system was engineered to reduce the amount of runoff into Rye Lake by redirecting the stormwater flow to other parts of the Airport. Currently, stormwater runoff from impervious surfaces, including runways and taxiways, flows into several catch basins from specific areas of the Airport which discharge to Army Corp Wetland Mitigation Basins A and B, or directly to Blind Brook. Each basin is located along the southern boundary of the Airport outside of the Kenisco watershed. Non-aviation and limited aviation operations in the area of the former NYANG discharge water to Rye Lake and Blind Brook through additional stormwater management system discharge outfall locations. This aviation area includes taxiways in the vicinity of the former NYANG burn pit. All outflows from the Airport drainage system subject to the New York State Pollutant Discharge Elimination System (SPDES) Permit are strictly monitored for compliance, as stated in the Order of Consent between the NYSDEC and Westchester County. The outfall locations are illustrated on Figure 3.

# Surface Water Findings

## Investigation

Surface and seep water samples were collected at nine locations along the boundaries of the airport and submitted to a laboratory for analysis for PFAS from April 2 to June 12, 2019. It is likely that groundwater, possibly contaminated with PFOS/PFAS, is seeping into surface water at some or all of the locations. A summary of the analytical results from these analyses is provided in Table 1. In total, five active outfalls exist at the Airport and include OF-1, OF-3, OF-4, OF-7, and OF-10. Two of these outfalls, OF-4 and OF-7, are located within the Kensico watershed, the remaining outfalls do not discharge to Rye Lake. The locations of the outfalls are illustrated on Figure 3. All five of the outfalls were sampled and analyzed for PFAS. The results of the PFOA/PFOS analyses are illustrated on Figure 4. It should be noted that outfalls OF-8 and OF-9 have been abandoned. The results of the laboratory analyses revealed PFOA/PFOS concentrations ranged from a low of 33 ppt at OF-4 to a high of 4,565 ppt at OF-7. Although no surface water guidance value or standard has been established by either the EPA or NYSDEC, one location, OF-7, identified PFOS/PFOA at elevated concentrations above the drinking water combined health advisory concentration level of 70 ppt. Furthermore, the drain water discharging from OF-7 has been sampled on three separate occasions, the results of which are presented in Table 2. Due to the PFOA/PFOS concentrations identified at OF-7, First Environment initiated an evaluation of the influent storm sewer drains leading to OF-7 on June 12 and 13, 2019. A summary of the PFAS drainwater and outfall concentrations are provided in Table 3. During this evaluation, First Environment mapped the drains leading to OF-7 using ground-penetrating radar (GPR) and collected 14 drain water samples for PFOA/PFOS analysis to gain an understanding of the concentration distribution and drainage pattern associated with OF-7. The results of the mapping revealed that the drains in the northern portion of the Airport near Building 10 and the Burn Pit converge at a collection point referred to as the subsurface catch basin where three pipelines drain water into one 13-foot by 7-foot by 7-foot deep (4,754 gallon capacity) concrete subsurface catch basin. The location of this basin is illustrated on the figure provided in Appendix A-1. Although First Environment has been informed by the County that the drawings do not constitute as-built drawings, they are a close approximation to what was installed in 2003. Once drain water is collected at the catch basin, it then flows through a 30-inch diameter pipeline to OF-7, which is located approximately 500 feet from the subsurface catch basin as illustrated on the figure provided in Appendix A-2.

Drain water samples d534 and cb-8-mh, collected near the former NYANG Burn Pit, exhibited the highest PFOS/PFOA concentrations, as shown in Figure 5. Based on our review of information, the invert of the storm drain pipeline between Building 10 and the former NYANG Burn Pit correlates well with the water table elevation of approximately 416 feet above msl (Appendix A-2). This correlation strongly suggests that groundwater is discharging into the storm drains and adversely affecting the water quality at the outfall location. It should also be noted that under non-rain event conditions, First Environment observed two approximately 30-inch pipelines; one entering from upgradient of the former NYANG Burn Pit and one leaving the catch basin to OF-7 as shown in Figure 5, both of which had a continuous flow of water into and out of the subsurface catch basin as shown in A-3. Given the dry, non-precipitation conditions and shallow depth-to-groundwater in this area, it is likely that this water is groundwater. Based on laboratory results of drain water samples collected during or shortly after precipitation events, rainwater events appear to dilute and therefore lower the concentration of PFOA/PFOS leaving OF-7. Under dry conditions on June 12, 2019, First Environment observed only a low flow of water leaving OF-7. A sample of the drain water collected under these low-flow conditions revealed PFOS/PFOA concentrations of 3,150/518 ppt, respectively. Based on these results, the majority, if not all, of drain water is believed to be groundwater. On June 13, a rain event totaling 0.59 inches of water was measured by the National Oceanic and Atmospheric Administration (NOAA) at the West Harrison Station. As result of the rain event, an increased flow discharging from OF-7 was observed. To evaluate the concentration of PFOS/PFOA under these conditions, a sample was collected and submitted for laboratory analyses. The results of the laboratory analyses revealed a decrease in concentration of PFOS/PFOA to 1,320/125 ppt, respectively. The effect of rainfall on the concentration of PFOS/PFOA at outfall OF-7 is illustrated below in Figure 6. The inverse relationship supports the conclusion that the mixing of “clean” surface water has a diluting effect on the PFOA/PFOS concentration in drain water discharging from OF-7. It further supports the conclusion that impacted groundwater is entering the drain under non-precipitation event conditions, resulting in higher concentrations of PFOA/PFOS in the discharge.

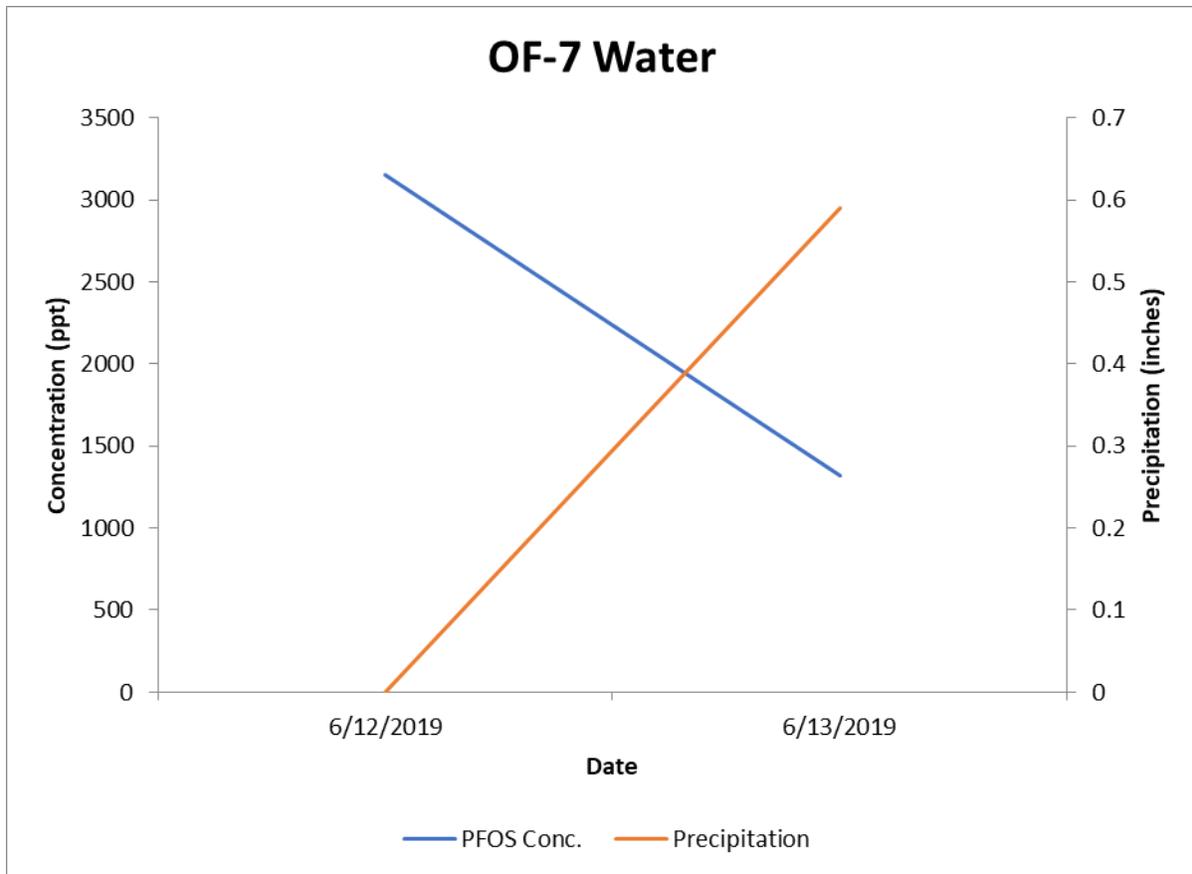

**FIGURE 6 - OF-7 Water Outflow  
Inverse Relationship Precipitation vs. PFOA/PFOS Concentration**

Based on these findings and the conclusion that groundwater is adversely impacting drain water under low-flow/non-precipitation conditions, controlling and/or preventing groundwater from entering the drain lines is considered to be a critical element in reducing or possibly eliminating outfall concentrations of PFOA/PFOS.

## Geology/Hydrogeology

The geology at the Airport consists of shallow overburden soil overlying bedrock. The unconsolidated overburden consists of topsoil, some fill, as well as glacial till and glacial outwash deposits. The glacial deposits consist mainly of yellow-brown micaceous-rich sand and cobbles, although lenses of clay and silt are interbedded. Groundwater will tend to flow preferentially through the sand rich layers and cobbles as compared to the clay and silt layers where its movement will be retarded and perched.

The bedrock formation at the Site, which is located below the overburden, is described as Manhattan schist and Hartland formation schist. Based on a review of prior investigations conducted at the Airport, the depth-to-bedrock varies across the Project Area, ranging from approximately 14 to 25 feet below grade. The soil in the area of the former NYANG Burn Pit consists of approximately 12 feet of unconsolidated sand, gravel, and silt overlying schist bedrock. The area also contains up to seven feet of fill that includes fragments of asphalt, concrete, and angular gravel.

Groundwater underlying the site was identified in two units, an unconfined aquifer consisting of unconsolidated soils and the uppermost weathered bedrock and the confined aquifer that is comprised of schist bedrock.<sup>1</sup>

Within the Project Area, the water table was encountered in the overburden aquifer at depths ranging from 1.5 to 20 feet below grade. There is a groundwater divide at the Site where the groundwater in the upper water-bearing zone from the northern and southwestern portions of the Project Area flows in a westerly direction toward Rye Lake; whereas, groundwater in the upper water-bearing zone for the rest of the Project Area flows toward the east and southeast away from Rye Lake.

---

<sup>1</sup> Fisher, Donald, Y.W. Isachsen and L.V. Richard, 1970, "Geologic Map of New York, Lower Hudson Street," New York State Museum and Science Service Map and Chart Series No. 15.

## Previous Burn Pit Activities

The former NYANG Burn Pit is the only known source of PFAS contamination at the Airport but is not necessarily the only source of contamination. The concurrent Site Characterization Workplan addresses identification of potential additional source areas. Historical aerial photographs of the Project Area for the years 1940, 1947, 1976, 1986, 1994, and 1995 were reviewed to gain an understanding of the Airport development over the years. The review of aerials confirmed our understanding that during 1940 the Project Area was vacant and generally woodlands. In the 1947 aerial, the Airport can be seen although operations are not nearly as pervasive as they are now. In 1976, the Airport size appears to have increased; however, no evidence of dumping or other potentially adverse activities could be discerned from the photograph.

During a detailed site reconnaissance by First Environment in approximately October 1999, a burn pit was identified west of Building 10. Aerial photograph review also assisted in defining the NYANG Burn Pit boundaries. The firefighting training activities consisted of the repeated burning and extinguishing of aviation fuel. The training activities were initially conducted by the Air National Guard and were later conducted by Airport personnel. The firefighting training activities are reported to have been conducted in this area, and these activities were suspected to have potentially impacted soil and groundwater at this location. Training activities at the Burn Pit area of the Site were permanently discontinued prior to earlier investigation and remediation that occurred in 1999.

The concentrations of the following VOCs were above the guidance values in one or both initial groundwater samples collected from temporary wells: vinyl chloride, benzene, toluene, ethylbenzene, and total xylenes. The VOC trichloroethene was detected in groundwater at B-5W (also later FMW-5) but at a concentration below the regulatory guidance value. The SVOCs naphthalene, benzo(a)anthracene, chrysene, benzo(b)fluoranthene, benzo(k)fluoranthene, and benzo(a)pyrene were detected in groundwater at B-5, above the regulatory guidance value. Other SVOCs, including phenanthrene, anthracene, and pyrene, were detected in groundwater from grab samples at both B-5 and B-7 but at concentrations below regulatory guidelines.

On January 28, 2000, First Environment installed and developed three shallow two-inch permanent flush-mount monitoring wells (FMW-5, FMW-6, and FMW-7) and later installed one bedrock monitoring well (FMW-23). Each overburden well was installed with the screened

interval from 2 to 12 feet below grade, which spanned across the water table that was encountered at approximately 3 to 6 feet below grade. Monitoring well FMW-5 was installed at a boring location where oily soil and elevated concentrations of VOCs and SVOCs were identified. First Environment installed monitoring wells FMW-6 and FMW-7 approximately 100 feet downgradient from what was believed to be the former Burn Pit area. Monitoring well FMW-8 was installed to the east of the former Burn Pit on June 15, 2000 to a depth of 12 feet. In order to evaluate the potential for contaminants in a deeper hydrologic unit, specifically the bedrock, bedrock monitoring well (FMW-23) was completed on November 16, 2000.

The analytical results for FMW-5, located inside the Burn Pit boundary, revealed elevated levels of VOCs as well as SVOCs in groundwater. As a result of the elevated levels of VOCs and SVOC identified in the soil and groundwater, four excavation events were completed to address the identified concentrations. At the completion of the remedial excavations, post-excavation samples were collected to document the success of the remedial actions. Approximately 2,800 tons of impacted soil was removed from May 16 to October 20, 2000 over a 130-foot by 60-foot area to 4 to 6 feet below grade. The soil removed was transported and disposed of at Soil Safe, Inc., Salem, New Jersey.

In order to restore the area of the excavation to original grade, soil previously stockpiled on site was evaluated to determine if it was suitable for reuse to backfill the former Burn Pit area excavation. The proposed backfill soil consisted of stockpiled soil located west of Hanger B. The stockpile was generated from the construction of a taxiway as part of the Phase III Construction at the Airport.

Although not a regulatory requirement, the soil pile was sampled to confirm its suitability for use as backfill material. The stockpile was sampled on October 30, 2000 (GB-49 through 59) for VOCs and SVOCs. To be representative of the entire soil pile thickness, each sample consisted of a composite sample collected from a depth ranging from 0-7 to 0-12 feet from the top of the soil pile. The soil consisted of reddish-brown sand, gravel, and silt, free of deleterious material, with no elevated PID readings observed.

## Reliability of Data Overview

All surface and drain water samples obtained by First Environment through WSP were collected in accordance with the Technical Guidance for Site Investigation and Remediation (NYSDEC DER-10 dated May 2010). WSP is a consultant the County has contracted to perform groundwater sampling at the Airport. This work is being conducted under the direction of First Environment. After collection, sampling containers were placed into shipping coolers provided by the laboratory and chilled to 4°C. Each cooler was accompanied by a completed chain-of-custody record. The samples were stored and shipped within 24 hours to York Analytical Laboratories (a State Department of Health (DOH) ELAP-certified laboratory). Laboratory analyses were performed using accepted and current United States Environmental Protection Agency (US EPA) analytical methods. Samples collected for PFAS analysis were analyzed via EPA modified method 537 with Category B deliverables. The data will be provided in an electronic data deliverable (EDD) format under the NYSDEC EQUIS Environmental Data Management System.

Samples were handled and analyzed in compliance with sample holding times, method detection limits, and precision and accuracy criteria for the analytical method. No significant events or seasonal variations occurred that may have influenced sampling procedures or analytical results.

## Health & Safety

Prior to initiating any on-site intrusive activities, First Environment, or its subcontractors, will complete the required public utility mark-out and notifications. In addition, First Environment will prepare a site-specific health and safety plan (HASP) in accordance with NYSDEC guidance (DER-10) incorporating the tasks to be completed as outlined in this proposal. The HASP is a requirement of the federal Occupational Safety and Health Administration (OSHA) and is not subject to the approval of NYSDEC. The HASP is provided in Appendix B.

## Community Air Monitoring Plan

A Community Air Monitoring Plan (CAMP) has been developed to measure, evaluate, and control, as necessary, potential fugitive particulates and, if observed, volatile organic compounds (VOC) generated during ground intrusive activities. The CAMP was developed using the New York State Department of Health Generic Community Air Monitoring Plan in combination with site-specific information and proposed activities.

Depending on the type of activity, levels of airborne particulates and/or VOCs will be monitored and recorded in real-time at both the upwind and downwind perimeters of the immediate work area. The purpose of the CAMP is to protect the downwind community from potential release of contaminants to the air generated during the activities. The action levels developed by the NYSDOH will be followed as part of the CAMP.

If the recorded levels approach the pre-established action level or if airborne particulates are visually observed migrating off site or towards sensitive receptors, suppression measures will be implemented immediately. Suppression measures may include misting the particulate source with water, use of particulate suppression materials, wetting the work area prior to initiating the activities, or stopping work activities until recorded levels fall below the action level.

Although the measures described above will be undertaken, it is First Environment's belief, based on previous investigations, that air borne contaminants are not anticipated resulting from site investigation. However, as a best practice to safeguard and protect workers and the community, air monitoring will be performed during site activities. A copy of the CAMP is provided in Appendix C.

## Quality Assurance Project Plan (QAPP)

Pursuant to NYSDEC guidance, the scope-of-work includes quality assurance procedures to be followed for sampling and analysis. WSP, under the direction of First Environment, will conduct sampling as per the QAPP attached in Appendix D. Quality Assurance/Quality Control (QA/QC) procedures required by the NYSDEC are to be documented in the QAPP. The minimum requirements for the QAPP for this project include details of:

- i. The project scope and project goals as well as how the project relates to the overall site investigation or remediation strategy.
- ii. Project organization, including the designation of a project manager, QAO, and field analyst (if field analysis is planned). Resumes of these individuals may be included.
- iii. Sampling procedures, data quality usability objectives, and equipment decontamination procedures.
- iv. Site map showing sample locations.
- v. An "Analytical Methods/Quality Assurance Summary Table"<sup>2</sup> which must include the following information for all environmental, performance evaluation, and quality control samples:
  - (1) matrix type;
  - (2) number or frequency of samples to be collected per matrix;
  - (3) number of field and trip blanks per matrix;
  - (4) analytical parameters to be measured per matrix;
  - (5) analytical methods to be used per matrix with minimum reporting requirements; and
  - (6) number and type of matrix spike and matrix spike duplicate samples to be collected.

The Quality Assurance/Quality Control (QA/QC) procedures were conducted as described in the Quality Assurance Project Plan (QAPP) provided as Appendix D.

### Data Validation

The analytical data package from the laboratory will be reviewed by a third party to determine compliance with the NYSDEC requirements. The review of the analytical data will be submitted separately upon its completion.

---

<sup>2</sup> Currently, there are no standard EPA methods for analyzing PFAS in surface water, non-potable groundwater, wastewater, or solids. For non-drinking water samples, some U.S. laboratories are using modified methods based on EPA Modified Method 537. The Department has applicable guidance on emerging contaminant sampling ("Guidelines for Sampling and Analysis of PFAS Under NYSDEC's Part 375 Remedial Programs"), last updated January 2020. The Department's guidance includes field sampling procedures, data assessment, sampling protocols for PFAS in surface water and other media, laboratory guidelines, data review guidelines, etc. last updated January 2020. The Department's guidance includes field sampling procedures, data assessment, sampling protocols for PFAS in surface water and other media, laboratory guidelines, data review guidelines, etc.

## Scope-of-Work

First Environment has prepared the following scope-of-work in compliance with the NYSDEC Order on Consent executed on June 6, 2019. It also incorporates elements discussed during subsequent teleconferences and email correspondence with the NYSDEC. On August 27, 2019, First Environment met with Airport Operations and County Department of Public Works engineers to discuss potential IRM options that would be acceptable to the Airport given the limitations presented by its flight operations.

As presented above, the IRM will be implemented in a phased approach with the first phase involving the collection and analysis of additional data necessary to support the development of a technically feasible and practical IRM (Phase II). Specifically, the first phase of the IRM will involve the collection and analysis of additional data obtained from the OF-7 and OF-4. Once the data has been collected at outfalls/tributaries and a thorough understanding of drain flow, distribution of PFOA/PFOS, and the interaction of groundwater and drain water has been achieved in the area of OF-7 as well as OF-4, then Phase II can be initiated. As stated, the objective of the IRM will be to reduce, to the extent practical, elevated levels of PFOA/PFOS impacted water from migrating off the Airport property at OF-7 as well as OF-4. Table 4 provides an estimated schedule for IRM activities and the percentage of task completion to date.

It should also be noted that the New York City Department of Environmental Protection (NYCDEP) conducted Emerging Contaminant Monitoring on a quarterly basis at location E10 downgradient of OF-7 and E11 downgradient of OF-4, as shown in Figure 4. At E10, the analytical results of the NYCDEP sampling on January 29 and April 17, 2019 identified combined PFOA/PFOS concentrations of 520 ppt and 570 ppt, respectively, while concentrations identified at E11 are approximately five times lower. Although, the NYCDEP identified elevated levels of PFOA and PFOS downgradient of OF-7, Westchester Joint Water Works (which is not affiliated with the County) collected and analyzed surface water from the Kenisco Reservoir pump station at Rye Lake on June 11, 2019. The laboratory results from this event revealed no detectable concentrations of PFAS in the water samples from Rye Lake. Based on these results, it is reasonable to conclude that the concentrations of PFOA/PFOS identified at the Airport are not impacting the water quality in Rye Lake at any detectable level.

Notwithstanding, to measure the effectiveness of the IRM and ensure the ongoing protectiveness to Rye Lake, First Environment is proposing to conduct quarterly sampling at E10 and E11 which are located downgradient of Outfalls OF-7 and OF-4, respectively, and upgradient of Rye Lake. From an overall perspective, once the IRM has been implemented, the goal of the IRM is to minimize the ongoing discharge of PFOS and PFOA to Rye Lake by minimizing infiltration of contaminated groundwater into the storm drain system leading to OF-7. First Environment believes the implementation of groundwater IRM at the source area and in the area of SW-2 will reduce PFOA/PFOS concentrations as well as ephemeral tributaries leaving the Airport in the area of OF-4.

## **Phase I - Data Collection and Evaluation**

Before an IRM can be implemented, a thorough understanding of the drain flow, interaction of groundwater and drain water, and distribution of PFOA/PFAS must be achieved such that a technically feasible and appropriate IRM can be designed. Accordingly, First Environment is proposing to collect specific site information to more fully characterize and understand the relationship between stormwater flow and groundwater. This will involve measuring how surface water and groundwater interact, and possibly coningle, at drains in the area of the former NYANG Burn Pit and OF-7.

As noted above, it has been demonstrated that under low flow, non-precipitation conditions of groundwater exhibiting higher concentrations of PFAS is adversely impacting water quality within the storm sewer system. Specifically, the drain pipeline that crosses the Burn Pit area and extends to OF-7 appears to be draining the highest PFAS concentration groundwater from the Burn Pit area to the subsurface catch basin and then to OF-7.

Furthermore, the highest combined PFOA and PFOS concentrations in groundwater were detected in monitoring wells FMW-6 (16,990 ppt) and FMW-7 (19,047 ppt). Both wells are located immediately adjacent to the former NYANG Burn Pit area where PFAS containing AFFF was used during fire training exercises. This same area also identified the highest levels of PFOA/PFOS in storm sewer drains at sample location cb hm8 where PFOA/PFOS was identified at a concentration of 9,510 ppt. As such, understanding the interaction of groundwater, surface water, and drain water is critical with respect to implementing an IRM to manage discharge downgradient of the Burn Pit area.

Therefore, one of the primary goals of the IRM will be to mitigate the negative impact the groundwater is having on the discharge from the storm sewer collection system.

### ***Storm Sewer Investigation***

As an initial step toward evaluating the interaction of groundwater and surface water, First Environment has coordinated with GPR One Call for a video inspection of the drain system. The findings have revealed a deterioration of the corrugated steel pipeline and substantial leakage of groundwater into the pipelines and around joints, as well as into the subsurface catch basin and within concrete boxes at some locations. The failure of the storm sewer is allowing elevated PFAS in groundwater to enter the storm sewer system that leaves OF-7. The information obtained during the video inspection is being used to evaluate the system in order to design a new system in such a manner that it will mitigate groundwater flow into the drain system.

### ***Outfall Flow and Rainfall Data Collection***

A further step in evaluating the interaction of groundwater and surface water will be to measure and evaluate the daily flow rates of water discharging outfalls in relation to precipitation events over a 60-day period. First Environment believes a 60-day period will be a sufficient period to assess flow conditions, especially since this data collection will occur continuously during the wet season. If, however, based on rainfall events, a determination is made that peak rainfall was not achieved to assess flow, then data collection regarding stream flow may be extended to ensure the reliability and usability of data.

The flow information will be used to support the proper modification to the drain system and management of water leaving the airport.

Specifically, to gain a better understanding of this interaction, First Environment will measure flow rates leaving outfalls OF-4 and OF-7 as well as an unnamed stream by the Airport mound at SW-2. It should be noted that SW-1 is located 1,400 feet downgradient of the Burn Pit, along the fence line, as shown on Figure 4. Water at this location does not appear to have regular flow and tends to be a seasonable seep that is only present during high-water table conditions. Notwithstanding, this area will be evaluated further to better understand the nature and extent of the seep. To monitor the flow at OF-4, OF-7, and SW-2 (if possible), First Environment is proposing to use a MantaRay Portable Area-Velocity Flow Meter or Weir that is capable of measuring flow in open channels as well as partially filled and surcharged pipes using an

ultrasonic sensor. It is designed to monitor stormwater, sewage, industrial effluent, irrigation water, and flow in natural streams.

### ***Stream Mapping & Surface Water Assessment***

Currently, the surface water discharge from unnamed tributaries/streams is not completely understood even after reviewing available USGS maps and aerial photographs. This conclusion was drawn even after reviewing available USGS maps and aerial photographs of the Site. Therefore, First Environment proposed to accurately map through field evaluation the unnamed tributaries/streams as well as evaluate the water quality migrating from the Airport. The stated objective for this further investigation is to gain a thorough understanding of what additional portions of the Airport, if any, may be contributing to elevated levels of PFAS. This evaluation will include the area of SW-1, SW-2, SW-3, and SW-4 downgradient of the former NYANG Burn Pit, along the fence line, as shown on Figure 4.

The water at SW-1 and SW-3 appears to be ephemeral and likely caused by seasonal seeps that are only present during high-water table conditions. These areas are not believed to be providing surface water flow into Rye Lake but will be examined further during the mapping activities. Notwithstanding, this area, as well as other areas, will be evaluated to further understand the nature and extent of the seeps and tributaries that may provide water to Rye Lake. Specifically, First Environment, through field evaluation, will verify unnamed stream flow and any connection that flow may have from the Airport to Rye Lake. To that end, during the Spring of 2020, when vegetation growth is low and the area can be traversed unencumbered, First Environment will map all identifiable streams and seeps using Global Positioning System (GPS). The data obtained from this evaluation will provide a thorough understanding of surface water flow across the study area and any potential impacts that flow may have to Rye Lake. Accordingly, the study will also provide the necessary information to evaluate the need to implement IRMs. Lastly, First Environment will map, to the extent possible, surface features at the Airport which collect and transport surface water runoff. As requested, we will include in this analysis drainage swales, run-off locations, and other discharge locations, including streams.

The NYSDEC is requesting surface water and sediment samples be collected and analyzed for VOCs, SVOCs, TAL metals, pesticides, PCBs, and PFAS at all outfalls and tributaries leaving the Airport and in accordance the County will comply with this request. This includes one round of surface and sediment sampling and analysis at the locations identified in Figure 7.

Subsequent to the baseline sampling described above, during a six-month period, surface water samples will be collected monthly for PFAS analysis. A minimum of two surface water sampling events for PFAS will be conducted at all five outfall locations (OF-1, OF-3, OF-4, OF-7, and OF-10) as well as at intermittent streams if identified (e.g., SW-1, SW-2 and SW-3). One event will be collected in the wet season at a high-flow condition, with one preferably under dry season or low-flow condition, including one sampling event downgradient of OF-1, OF-3, and OF-10, as long as such locations are within the Airport property. If warranted, based on the laboratory findings of the initial baseline, additional surface and sediment samples may be necessary. First Environment has updated Table 5 to reflect the surface water and sediment sample analysis required by the NYSDEC. Duplication of sampling, if already proposed in the SCWP, will not be performed as part of the IRM.

First Environment will also re-test iron floc at SW-2 for TAL metals to verify the presence of arsenic previously identified in 2015. First Environment will also assess the presence and potential migration of iron floc leaving the Airport by visual inspection and laboratory analysis. If a floc sample is identified at a downgradient location from SW-2, then a sample will also be collected for TAL analysis. In total, three surface water samples will be collected and analyzed for TAL (SW-2a, 2b, 2c filtered and unfiltered) and one bioassay test may be conducted at SW-2a. First Environment will also collect one sediment sample at SW-2a for TAL metals. The first surface water and sediment sample will be collected at SW-2 (SW-2a), followed by surface water samples collected 200 feet downgradient of SW-2 (SW-2b), and the last sample collected (SW-2c) at the Airport boundary. Once the results have been received and evaluated, a determination will be made regarding the need for a sediment trap or other corrective action measures for this area.

First Environment will sample up to five surface water locations (ES-1 to ES-5) for PFAS as shown in Figure 7 to assess the potential migration pathway of PFAS from Hanger E to OF-4. Also, all newly installed monitoring wells as part of the SCWP will be analyzed for VOCs, SVOCs, pesticides, PCBs, 1,4 Dioxane, TAL metals, and PFAS.

Lastly, once Phase II of the IRM is completed, First Environment will coordinate with the NYCDEP to identify the specific locations where it conducted quarterly sampling at E10 and E11 and arrange synoptic sampling at the Airport (OF-4, OF-7, SW-2, SW-3, and SW-4) with the NYCDEP at E10 and E11. The data collected will not only be used to further develop a PFAS

surface water quality baseline at the Airport but will guide an evaluation of where surface water may require corrective action, if necessary. Further, the sampling downgradient of OF-7 and OF-4 will be used as an IRM performance monitoring location to evaluate the effectiveness of the IRM in reducing PFAS concentrations downgradient of the Burn Pit.

### ***Surface Water and Groundwater Data Collection***

To further evaluate the interaction between surface water and groundwater, First Environment will install staff gauges at the locations of OF-1, OF-3, OF-4, OF-7, and OF-10 to assess surface water elevation relative to groundwater elevation. This data will provide additional information with respect to areas that are losing or gaining water from groundwater. Upon completing the installation of the staff gauges, a licensed surveyor will survey elevations at stormwater outfall drains in the Burn Pit area as well as any new monitoring wells (see section below) installed that were not previously surveyed in the area of OF-7 and OF-4. Water levels at staff gauges and monitoring wells will be measured in the fall and spring to evaluate groundwater contribution at outfalls and areas where surface water is discharging from the Airport.

### ***Shallow Monitoring Well Installation***

In order to more fully characterize the groundwater quality conditions in the storm drain and former NYANG Burn Pit area, First Environment is proposing to install three shallow monitoring wells, as illustrated on Figure 8.

First Environment will retain a drilling subcontractor to install the shallow monitoring wells using a track-mounted Geoprobe 7822. The installation of three monitoring wells will be completed over an estimated two-day period. The soil will be classified by a First Environment geologist using the Unified Soil Classification System (USCS) and screened using a Photoionization Detector (PID).

The shallow monitoring wells will be constructed using two-inch PVC riser (schedule 40) with 10 feet of two-inch 0.010 slotted PVC screen. The shallow wells will be installed in such a manner that the screened interval will bridge the water table with approximately three feet of screen above and seven feet below the average water table. It is not anticipated the monitoring wells in this area will exceed a total depth of 15.0 feet below ground surface (bgs).

### ***Groundwater Monitoring***

Once installation of the three monitoring wells is completed and developed turbid-free, groundwater samples will be collected for PFAS by WSP under the direction of First

Environment. Sampling procedures for PFAS, including laboratory requirements, are described in the QAPP (Appendix D).

## **Phase II – IRM Evaluation and Implementation**

Based on the information obtained during Phase I, the County, with input from First Environment, will design an appropriate and technically feasible IRM to reduce the concentrations of PFOA/PFOS migrating from the Airport protective of Rye Lake. This, coupled with the groundwater IRM focused at remediating the PFAS at the source area, should have the desired effect in lowering PFOA/PFOS concentrations leaving OF-7 to acceptable levels.

### ***Storm Sewer Modification***

As presented above, the inflow of groundwater into the stormwater drainage system appears to be a main factor driving the elevated concentrations of PFOA/PFOS identified at OF-7 requiring an IRM. Accordingly, First Environment has evaluated various alternatives to address this situation. One of the options considered was the installation of a water-tight liner and another being total pipeline replacement to mitigate, to the extent practical, PFAS contaminated groundwater from entering the storm sewer system. The evaluation included the installation of approximately 2,500 feet of water-tight liner through either a sliplining or Cured-In-Place Pipe (CIPP) to seal the existing storm sewer from groundwater entering the storm sewer system. Another alternative considered was to abandon the existing system in place and design and install a new watertight system. After the collection of more sample data along the storm sewer, as shown in Figure 9, interpretation of the video survey, including the observation that groundwater is often at an elevation above the bottom of the catch basins invert; it was determined, based on the poor storm sewer condition and debris identified in the existing storm water system, that these conditions would prevent an effective installation of sliplining or CIPP system. Therefore, the Westchester County Department of Public Works and Transportation (WCDPWT) decided to retain Provident Design Engineering, PLLC (PDE) with First Environment's support. The purpose of retaining PDE was to prepare design/construction drawings and specifications for the replacement and abandonment (as described herein) of the existing drainage system that is a tributary to SPDES Outfall No. 7 at the Westchester County Airport. The County requested a fast track design of a permanent stormwater drain replacement system and forgo conducting a pilot test.

Such replacement and abandonment are required in order to address/remediate the inflow of groundwater containing elevated concentrations of PFOA/PFOS entering into the existing drainage system and receiving waters downstream of Outfall No. 7.

The new/replacement system has been designed using the following materials and construction methods that will make it watertight/resistant to groundwater inflow:

- Approximately 4,400 lineal feet of High-Density Polyethylene Pipe (HDPE), Pressure Rated (100 psi), Standard Dimension Ratio (DR) 21, in sizes ranging from 6 to 30 inches inside diameter (ID). Pipe shall be joined by the butt fusion process into continuous lengths at the job site. The jointing method shall be by the heat fusion method and shall be performed in strict conformance to the pipe manufacturers recommendations.
- Pipes will be bedded and initially backfilled (6 inches minimum above crown) using NYSDOT Type 4 subbase material with a maximum particle size of 1.25 inches, compacted to 95 percent of maximum density.
- Pipe lengths exceeding 100 feet will have poured-in-place concrete anti-seep collar(s) incorporating wedge style water stop connectors.
- Cast-in-place reinforced concrete end walls with wedge style water stop connectors shall be constructed at system surface flow inflow and discharge points.
- New precast, reinforced concrete drainage structures (manholes, catch basins and drain inlets). Joints between structure riser sections shall be sealed using a Vertite® single offset joint seal conforming to ASTM C443. All structures shall have integrally cast resilient connectors providing watertight pipe connections conforming to ASTM C923/C1478. Exterior surfaces shall be coated with an asphaltic waterproofing material; interior surfaces shall be sealed with a crystalline waterproofing product.
- All installed pipe sections between structures shall undergo low-pressure air exfiltration/leakage testing. Leakage testing of drainage manholes shall be by vacuum method; testing of drain inlets and catch basins shall be performed using the exfiltration water method.

Most of the new drainage system will be installed in alignments that run parallel and/or adjacent to those of the existing system. Topographic low/sag points in the drainage system will be maintained through removal and replacement of existing catch basins/drain inlets at the same location(s). Most of the existing drainage system pipes, except where new system crossings occur, will be abandoned in place. Existing drainage pipes at crossings and existing in-line structures shall be removed. Ten-inch and smaller diameter pipes to be abandoned shall be plugged at both ends with a non-shrink mortar grout not less than 2 feet to 0 inches thick. Pipes 12-inch in diameter and larger to be abandoned shall be plugged and filled with a cement-based grout-slurry mixture. Abandonment shall adequately provide for the legal disposal of all existing excavated materials, of whatever nature, removed from the system. Any dewatering necessary, in this area where elevated PFAS is encountered will be collected in frac tanks, characterized for PFAS, and then treated with activated carbon and/or resin to remove/reduce PFAS levels before discharging such water back to the storm sewer or drainage basin. The approximate location where the storm sewer replacement will occur is illustrated in Figure 8. The exact

storm water system location will be provided in the 100 percent stormwater system design. Once the 100 percent design is completed and reviewed by the County, the actual location and the extent of the stormwater sewer replacement and abandonment will be provided to the NYSDEC.

The County is expected to have the 100 percent engineering design and bid document completed by August 31, 2020. The bid selection process is underway, but the County has not provided a bid selection date or work completion date. First Environment is working with the County to define schedule dates that can be provided to the NYSDEC. Once those dates are provided, the dates will be shared with the NYSDEC. Once the 100 percent design is completed, the design will be provided to the NYSDEC.

Once the storm sewer has been isolated from receiving impacted groundwater, it is reasonable to conclude that only “clean” surface water runoff would be directed to OF-7.

### ***Storm Sewer Realignment***

On August 27, 2019, First Environment met with Airport Operations to discuss available and viable options to address the drainage system issue. It was determined during that meeting that redirecting drain water from OF-7 to an open catch basin is not a viable option due to the potential of creating a surface water body in the basin that would attract waterfowl and birds of prey that could increase the risk and threat to air traffic safety.

### ***Treatment of PFAS***

First Environment will evaluate the use of activated carbon in liquid form (PlumeStop) as a means of reducing PFAS concentrations from groundwater/seeps, use of aerial photographs, review of storm drain infrastructure in this area, and assessment of subsurface geologic/hydrogeology conditions as part of Phase I. Based on information provided to First Environment by the manufacturer, a single (or multiple) barrier can be installed to limit plume migration off site. This technology uses a colloidal form of carbon comprised of a suspension of charged clay minerals. The liquid form can be applied into the subsurface through gravity-feed, blending, or low-pressure injection. Based on our review of this technology, the in-situ application of PlumeStop would be injected into the saturated zone above the location of the seep and mound. The injection location has been modified to an upgradient location further from the seep area, although the manufacturer has assured First Environment that once injected, the PlumeStop only moves 5 to 10 feet from the injection location leaving little chance for the material to break through at a downgradient location more than 100 feet away. This effort is expected to reduce

PFAS concentrations in surface water in the area of SW-2. To further evaluate this technology and determine its viability for use at the Site, First Environment is working with Regensis, the manufacturer of PlumeStop, to develop a pilot test whereby PlumeStop would be applied in the area illustrated in Figure 10. As a contingency and precautionary measure, bales of hay, emergency response booms, and silt fence will be used to filter water leaving this area. It should also be noted that PlumeStop is not toxic to the environment. The location of the filter barrier is provided in Figure 10.

Also, before application of PlumeStop, the area along the fence line at SW-2 will be closely monitored. The pilot test will include surface water monitoring for PFAS and visual inspection of water quality at SW-2 downgradient of the injection area before, during, and after injection. If impacts to the surface water resulting from injection are adverse at SW-2, the injection of PlumeStop in this area would be terminated and re-evaluated. However, the use of this remedial technology will depend on the findings obtained during Phase I and, as such, will be evaluated further once that data has been obtained.

## **Performance Monitoring**

To measure the effectiveness of the IRM, once the new stormwater system has been installed to prevent contaminated PFAS groundwater from collecting in the storm sewer system and injection is completed, sampling for PFAS will be conducted by WSP under the direction of First Environment. Once lower PFAS surface water concentrations are achieved at OF-7 and SW-2, First Environment will collect quarterly surface water samples for PFAS analysis at OF-7, OF-4/SW-4, SW-2 and SW-3, as well as to coordinate with the NYCDEP to also perform PFAS quarterly sampling at E10 and E11. The NYSDEC will be provided quarterly performance monitoring updates each quarter following monitoring.

## Schedule

Subsequent to the Department's review and approval of the IRM Workplan, First Environment will immediately initiate the IRM activities. Table 4 identifies the estimated completion schedule and percentage of work activities completed to date. Once the Phase I is completed, First Environment will further develop a schedule for the implementation of Phase II for NYSDEC approval. Table 5 identifies the sample media, number of samples, sample location, and laboratory analysis samples to be submitted to a New York State Certified Laboratory. In addition, once the workplan is approved by the NYSDEC, First Environment will submit monthly status reports to the NYSDEC and County before the 10<sup>th</sup> of each month. Each report will provide monthly work activities, findings as well as the upcoming anticipated work activities for the month.

## References

Fisher, Donald, Y.W. Isachsen and L.V. Richard, 1970, "Geologic Map of New York, Lower Hudson Sheet," New York State Museum and Science Service Map and Chart Series No. 15.

## TABLES

TABLE 1\*  
 PFAS Surface Water Results  
 April 2, 2019  
 Westchester County Airport

SampleID YorkID Sampling Date DilutionFactor ClientMatrix RptUnits	CASNumber	OF-7A 19D0111-01 4/2/2019 9:40:00 AM 50 Water ng/L		OF-7B 19D0111-02 4/2/2019 9:50:00 AM 25 Water ng/L		SW-1 19D0111-04 4/2/2019 10:30:00 AM 10 Water ng/L		SW-2 19D0111-06 4/2/2019 10:45:00 AM 1 Water ng/L		DUP 19D0111-08 4/2/2019 1 Water ng/L		SW-3 19D0111-09 4/2/2019 11:10:00 AM 1 Water ng/L		SW-4 19D0111-11 4/2/2019 11:35:00 AM 1 Water ng/L		OF-3 19D0111-13 4/2/2019 12:20:00 PM 1 Water ng/L		OF-1 19D0111-15 4/2/2019 12:45:00 PM 1 Water ng/L		OF-10 19F0542-03 6/12/2019 10:40:00 AM 20 Water ng/L		FB 19D0111-17 4/2/2019 12:30:00 PM 1 Water ng/L		FIELD DUP. 19F0543-10 6/13/2019 2 Water ng/L		FIELD BLANK 19F0543-11 6/13/2019 1:30:00 PM FIELD BLANK Water ng/L	
		Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q
<b>PFAS, NYSDEC Target List</b>																											
1H,1H,2H,2H-Perfluorodecanesulfonic acid (8:2 FTS)	39108-34-4	82.1	D	45.5	D	2.00	U	2.00	U	2.00	U	2.00	U	4.33		2.07		2.00	U	6.51	D	2.00	U	4.00	U	2.00	U
1H,1H,2H,2H-Perfluorooctanesulfonic acid (6:2 FTS)	27619-97-2	509	D,E	417	D,E	132	D	5.00	U	39.0		5.00	U	44.7		32.9		41.6		355	D	5.00	U	10.0	U	5.00	U
N-EFOSAA	2991-50-6	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
N-MeFOSAA	2355-31-9	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
Perfluoro-1-decanesulfonic acid (PFDS)	335-77-3	2.00	U	2.00	U	2.00	U	2.00	U	2.53		2.00	U	2.00	U	2.00	U	3.80		2.00	U	2.00	U	2.00	U	2.00	U
Perfluoro-1-heptanesulfonic acid (PFHpS)	375-92-8	66.5	D	59.4	D	10.5	D	2.82		2.00	U	2.00	U	2.00	U	3.41		2.00	U	62.1		2.00	U	2.00	U	2.00	U
Perfluoro-1-octanesulfonamide (FOSA)	754-91-6	6.62	D	5.39	D	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
Perfluoro-n-butanoic acid (PFBA)	375-22-4	418	D,E	157	D	226	D,E	16.6		12.5		20.4		15.0		12.5		12.3		64.3		2.00	U	2.00	U	2.00	U
Perfluorobutanesulfonic acid (PFBS)	375-73-5	55.9	D	92.4	D	36.6	D	12.5		7.47		6.94		2.66		14.9		7.61		56.2		2.00	U	2.00	U	2.00	U
Perfluorodecanoic acid (PFDA)	335-76-2	3.17	D	10.9	D	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
Perfluorododecanoic acid (PFDoA)	307-55-1	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
Perfluoroheptanoic acid (PFHpA)	375-85-9	232	D,E	207	D,E	238	D,E	16.8		11.6		18.2		16.1		13.9		11.6		79.0		2.00	U	2.25		2.00	U
Perfluorohexanesulfonic acid (PFHxS)	3871-99-6	1170	D,E	1100	D,E	443	D,E	79.4		46.8		22.3		5.97		79.7		54.7		753	D	2.00	U	2.00	U	2.00	U
Perfluorohexanoic acid (PFHxA)	307-24-4	528	D,E	432	D,E	505	D,E	39.5		25.9		35.8		27.6		31.6		25.9		193	D	2.00	U	2.26		2.00	U
Perfluorononanoic acid (PFNA)	375-95-1	341	D,E	255	D,E	46.8	D	9.60		29.0		47.0		5.14		18.4		36.3		24.8		2.00	U	2.00	U	2.00	U
<b>Perfluorooctanesulfonic acid (PFOS)</b>	<b>1763-23-1</b>	<b>3990</b>	<b>D,E</b>	<b>3070</b>	<b>D,E</b>	<b>375</b>	<b>D,E</b>	<b>126</b>		<b>84.4</b>		<b>27.6</b>		<b>11.8</b>		<b>97.9</b>		<b>100</b>		2040	D,E	<b>2.00</b>	<b>U</b>	3.81		2.00	U
<b>Perfluorooctanoic acid (PFOA)</b>	<b>335-67-1</b>	<b>575</b>	<b>D,E</b>	<b>453</b>	<b>D,E</b>	<b>109</b>	<b>D</b>	<b>18.3</b>		<b>13.1</b>		<b>14.5</b>		<b>20.8</b>		<b>19.6</b>		<b>15.5</b>		109		<b>2.00</b>	<b>U</b>	3.14		2.00	U
Perfluoropentanoic acid (PFPeA)	2706-90-3	712	D,E	652	D,E	897	D,E	47.1		32.6		60.0		43.6		30.7		33.4		216	D	2.00	U	2.50		2.00	U
Perfluorotetradecanoic acid (PFTA)	376-06-7	3.23	D	5.55	D	2.27	D	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
Perfluorotridecanoic acid (PFTDA)	72629-94-8	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
Perfluoroundecanoic acid (PFUnA)	2058-94-8	107	D	50.4	D	2.00	U	2.00	U	7.04		3.73		2.00	U	2.00	U	9.79		2.00	U	2.00	U	2.00	U	2.00	U

Notes:  
**Q is the Qualifier Column with definitions as follows:**  
 D=result is from an analysis that required a dilution  
 E=result is estimated and cannot be accurately reported due to levels encountered or interferences  
 U=analyte not detected at or above the level indicated  
 \*Collected by WSP; First Environment provided oversight

**TABLE 2\***  
**April, May, June 2019**  
**Outfall 7 PFAS Sampling Event Stormwater Laboratory Results**  
**Westchester County Airport**

SampleID YorkID Sampling Date DilutionFactor ClientMatrix RptUnits	CASNumber	OF-7A 19D0111-01 4/2/2019 9:40:00 AM 50 Water ng/L		OF-7A 19E1173-01 5/23/2019 9:38:00 AM 10 Water ng/L		OF-7A 19F0542-01 6/12/2019 10:00:00 AM 25 Water ng/L		OF-7A 19F0543-06 6/13/2019 11:30:00 AM 10 Water ng/L	
		Result	Q	Result	Q	Result	Q	Result	Q
<b>PFAS, NYSDEC Target List</b>									
1H,1H,2H,2H-Perfluorodecanesulfonic acid (8:2 FTS)	39108-34-4	82.1	D	25.0	U	55.8	D	16.7	D
1H,1H,2H,2H-Perfluorooctanesulfonic acid (6:2 FTS)	27619-97-2	509	D,E	146	D	379	D	109	D
N-EtFOSAA	2991-50-6	2.00	U	25.0	U	2.00	U	2.00	U
N-MeFOSAA	2355-31-9	2.00	U	25.0	U	2.00	U	2.00	U
Perfluoro-1-decanesulfonic acid (PFDS)	335-77-3	2.00	U	25.0	U	2.00	U	2.00	U
Perfluoro-1-heptanesulfonic acid (PFHpS)	375-92-8	66.5	D	25.0	U	103		26.1	
Perfluoro-1-octanesulfonamide (FOSA)	754-91-6	6.62	D	25.0	U	7.94		4.42	
Perfluoro-n-butanoic acid (PFBA)	375-22-4	418	D,E	56.2	D	133		44.4	
Perfluorobutanesulfonic acid (PFBS)	375-73-5	55.9	D	33.2	D	73.9		24.3	
Perfluorodecanoic acid (PFDA)	335-76-2	3.17	D	25.0	U	12.5		6.51	
Perfluorododecanoic acid (PFDoA)	307-55-1	2.00	U	25.0	U	2.00	U	2.00	U
Perfluoroheptanoic acid (PFHpA)	375-85-9	232	D,E	91.7	D	203	D	61.1	
Perfluorohexanesulfonic acid (PFHxS)	3871-99-6	1170	D,E	537	D	1290	D	443	D
Perfluorohexanoic acid (PFHxA)	307-24-4	528	D,E	157	D	354	D	107	
Perfluorononanoic acid (PFNA)	375-95-1	341	D,E	124	D	215	D	97.7	
Perfluorooctanesulfonic acid (PFOS)	1763-23-1	3990	D,E	2370	D	3150	D	1320	D
Perfluorooctanoic acid (PFOA)	335-67-1	575	D,E	187	D	518	D	125	
Perfluoropentanoic acid (PFPeA)	2706-90-3	712	D,E	221	D	524	D	155	
Perfluorotetradecanoic acid (PFTA)	376-06-7	3.23	D	25.0	U	2.00	U	2.00	U
Perfluorotridecanoic acid (PFTTrDA)	72629-94-8	2.00	U	25.0	U	2.01		2.00	U
Perfluoroundecanoic acid (PFUnA)	2058-94-8	107	D	25.0	U	74.1		31.3	
<b>Rainfall (inches)</b>		0		0.28		0		0.59	

**NOTES:**

**Q is the Qualifier Column with definitions as follows:**

D=result is from an analysis that required a dilution

U=analyte not detected at or above the level indicated

\*Collected by WSP; First Environment provided oversight

TABLE 3\*  
June 12-13 2019 Stormwater (Drain Outfall) PFAS Laboratory Results  
Westchester County Airport

SampleID YorkID Sampling Date DilutionFactor ClientMatrix RptUnits	CASNumber	OF-7A 19F0542-01 6/12/2019 10:00:00 AM 25 Water ng/L		OF-7B 19F0542-02 6/12/2019 2:50:00 PM 25 Water ng/L		OF-10 19F0542-03 6/12/2019 10:40:00 AM 20 Water ng/L		CB-1 19F0542-04 6/12/2019 11:30:00 AM 20 Water ng/L		D557 19F0542-05 6/12/2019 12:30:00 PM 10 Water ng/L		D549 19F0542-06 6/12/2019 1:00:00 PM 10 Water ng/L		D534 19F0542-07 6/12/2019 1:30:00 PM 25 Water ng/L		D543 19F0542-08 6/12/2019 2:00:00 PM 10 Water ng/L		CB-8 MH 19F0542-09 6/12/2019 2:15:00 PM 25 Water ng/L	
		Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q	Result	Q
<b>PFAS, NYSDEC Target List</b>																			
1H,1H,2H,2H-Perfluorodecanesulfonic acid (8:2 FTS)	39108-34-4	55.8	D	46.9	D	6.51	D	27.6	D	5.09		13.2		107	D	10.5	D	23.9	D
1H,1H,2H,2H-Perfluorooctanesulfonic acid (6:2 FTS)	27619-97-2	379	D	383	D	355	D	253	D	23.1		14.4		533	D	27.3	D	102	D
N-EtFOSAA	2991-50-6	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
N-MeFOSAA	2355-31-9	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
Perfluoro-1-decanesulfonic acid (PFDS)	335-77-3	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
Perfluoro-1-heptanesulfonic acid (PFHpS)	375-92-8	103		94.6		62.1		67.1		10.7		10.2		151	D	22.8		139	D
Perfluoro-1-octanesulfonamide (FOSA)	754-91-6	7.94		6.14		2.00	U	4.28		2.49		12.0		14.2		4.43		8.74	
Perfluoro-n-butanoic acid (PFBA)	375-22-4	133		137		64.3		115		29.8		19.4		266	E	33.5		72.1	
Perfluorobutanesulfonic acid (PFBS)	375-73-5	73.9		77.7		56.2		62.6		16.5		18.2		127		24.9		114	
Perfluorodecanoic acid (PFDA)	335-76-2	12.5		8.96		2.00	U	6.10		2.12		4.30		18.4		3.60		6.09	
Perfluorododecanoic acid (PFDoA)	307-55-1	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
Perfluoroheptanoic acid (PFHpA)	375-85-9	203	D	194	D	79.0		189	D	43.4		31.6		435	D	45.9		105	
Perfluorohexanesulfonic acid (PFHxS)	3871-99-6	1290	D	1270	D	753	D	1040	D	304	D	357	D,E	2760	D	411	D	1980	D
Perfluorohexanoic acid (PFHxA)	307-24-4	354	D	393	D	193	D	301	D	64.2		55.6		755	D	87.6		288	D
Perfluorononanoic acid (PFNA)	375-95-1	215	D	233	D	24.8		186	D	31.4		20.0		265	D	49.8		296	D
Perfluorooctanesulfonic acid (PFOS)	1763-23-1	3150	D	3140	D	2040	D,E	2140	D	515	D	690	D,E	7400	D	1140	D	4480	D
Perfluorooctanoic acid (PFOA)	335-67-1	518	D	514	D	109		382	D	57.6		46.9		2110	D	76.1		1200	D
Perfluoropentanoic acid (PFPeA)	2706-90-3	524	D	563	D	216	D	427	D	72.0		43.2		1000	D	87.7		195	D
Perfluorotetradecanoic acid (PFTA)	376-06-7	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	3.11		2.00	U	33.3	
Perfluorotridecanoic acid (PFTTrDA)	72629-94-8	2.01		2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U	2.00	U
Perfluoroundecanoic acid (PFUnA)	2058-94-8	74.1		30.8		2.00	U	19.1		10.2		2.11		67.0		18.6		17.9	

NOTES:

Q is the Qualifier Column with definitions as follows:

D=result is from an analysis that required a dilution

E=result is estimated and cannot be accurately reported due to levels encountered or interferences

U=analyte not detected at or above the level indicated

\*Collected by WSP; First Environment provided oversight

**Table 4  
IRM OF-7 & OF-4  
2020-2021**

<b>Milestone</b>	<b>Estimated Duration</b>	<b>Estimated Completion Date</b>	<b>Estimated Completion Percentage</b>
Meeting County Engineers & Airport Operations	1 Day	20 February	100%
Stream Reconnaissance and Mapping/Location of DEP Offsite Wells	3 Days	6 March	75%
Assess Additional Subsurface Collection Point	2 Days	15 March	100%
Staff Gauge Installation	1 Day	23 March	100%
Collect & Evaluate Storm Sewer Water/Groundwater Elevations	1 Day	30 March	100%
OF-7 Data Collection Storm Sewer Video Evaluation	10 Days	6 April	100%
Storm Sewer Surface water Sample Evaluation	20 Days	4 May	100%
Private Utility Mark out	2 Day	8 May	100%
Monitoring Well Installations & Well Development	20 Days	15 May	100%
Groundwater Sampling	7 Days	30 May	100%
OF-4 Pilot Test*	15 Day	15 August	10%
OF-7 Storm Sewer Design/Modification	45 Days	31 August	100%
OF-7 Storm Bid & Selection	30 Days	TBD	0%
Surface Water Sample Collection	120 Days	6 November	50%
Continued Outfall Flow & Rainfall Measurements	60 Days	30 November	40%
OF-7 Storm Sewer Installation	90 Days	TBD	0%
OF-7/OF-4 Performance Monitoring	Quarterly	TBD	0%

Estimated task durations and completions are tentative and are subject to modification based onsite work, progress, weather delays and other considerations such contractor availability as Airport access.

Monthly progress reports will provide task initiation date for next month activity.

Tasks such as OF-7 data collection/pilot test, OF-4 data collection and Groundwater IRM Phase I activities will be performed concurrently to the Site Characterization workplan to the extent possible to expedite overall project schedule.


\*Pilot date has been left in place but may need to be extended to the later part of 2020; Regensis evaluating Site Data.

**TABLE 5**  
**OF-7 & OF-4 IRM**  
**Summary Table**  
**Sample Location, Media and Laboratory Analyses**

<b>Airport Sample Area</b>	<b>No</b>	<b>Sediment</b>	<b>Ground Water</b>	<b>Surface Water</b>	<b>Laboratory Analysis</b>	<b>Sample Description</b>	<b>Comments</b>
Storm Sewer Sampling	12			x	PFAS	Collected at Storm Sewer and Catch Basin inflow and outflow of pipeline; and new subsurface collection point and old catch basin.	Sample locations are illustrated in Figure 9.
Tributaries/Outfalls	8	x		x	VOCs, SVOCs, pesticides, PCBs, metals, PFAS, 1,4 Dioxane.	OF-1, OF-3, (OF-4/SW-4), OF-7, OF-10, SW-1, SW-2, SW-3	As per NYSDEC request, a surface water and sediment samples will be collected to characterize the sediment and surface water to establish a baseline (For reference previous sample locations are identified in Figure 7).
Tributaries/Outfalls	8			x	PFAS	OF-1, OF-3, (OF-4/SW-4), OF-7, OF-10, SW-1, SW-2, SW-3	In the fall, one surface water will be collected to characterize the surface water for PFAS Where samples are not duplicative from those collected as part of the SCWP; samples will be collected for six consecutive months. (See Figure 7 identifies sample locations in the Surface Water IRM, including downgradient of Hanger E)
Hanger E	5			x	PFAS	ES-1 to ES-5	In the area around and downgradient of Hanger E. Surface water samples will be collected and analyzed for PFAS to assess if there is a connection between Hanger E and outfall OF-4. (see Figure 7).
Outfalls	3			x	PFAS	(OF-1), (OF-3), and (OF-10)	Surface water samples will be collected in the wet season at a high-flow condition, with one preferably in the dry season or at a low-flow condition, including downgradient of OF-1, OF-3, and OF-10, as long as such locations are within the Airport property
Tributary	3			x	Target Analyte List (TAL) metals, filtered and non-filtered.	SW-2a, SW-2b, and SW-2c	Test iron floc for TAL metals at SW-2a (note 2a is the same location as SW-2). In total, three synoptic surface water samples will be collected one at SW-2a (below mound); another 200 feet downgradient of SW-2b; and one along property boundary fence line. If iron floc is observed down gradient of SW-2a, one iron Floc sample will be collected for TAL laboratory analysis.
New Monitoring Wells	3		x		VOCs, SVOCs, Pesticides, PCBs, TAL Metals, 1,4 Dioxane, PFAS	3 of 19 monitoring wells installed in the area of Building 10.	Once installed, WSP will include the new monitoring wells in the next semi-annual sampling event; it is anticipated sampling will occur in the Spring as part of semi-annual monitoring.
Performance Monitoring	6			x	PFAS	OF-7, SW-2, SW-3, SW-4/OF-4, E10, and E11	Quarterly Analysis once IRM has been implemented.

The exact number and location of samples for laboratory analysis maybe subject to change based on field conditions and sampling equipment operation. Final sample locations maybe be determined in the field in consultation with the NYSDEC representative.  
TBD – To Be Determined


## FIGURES

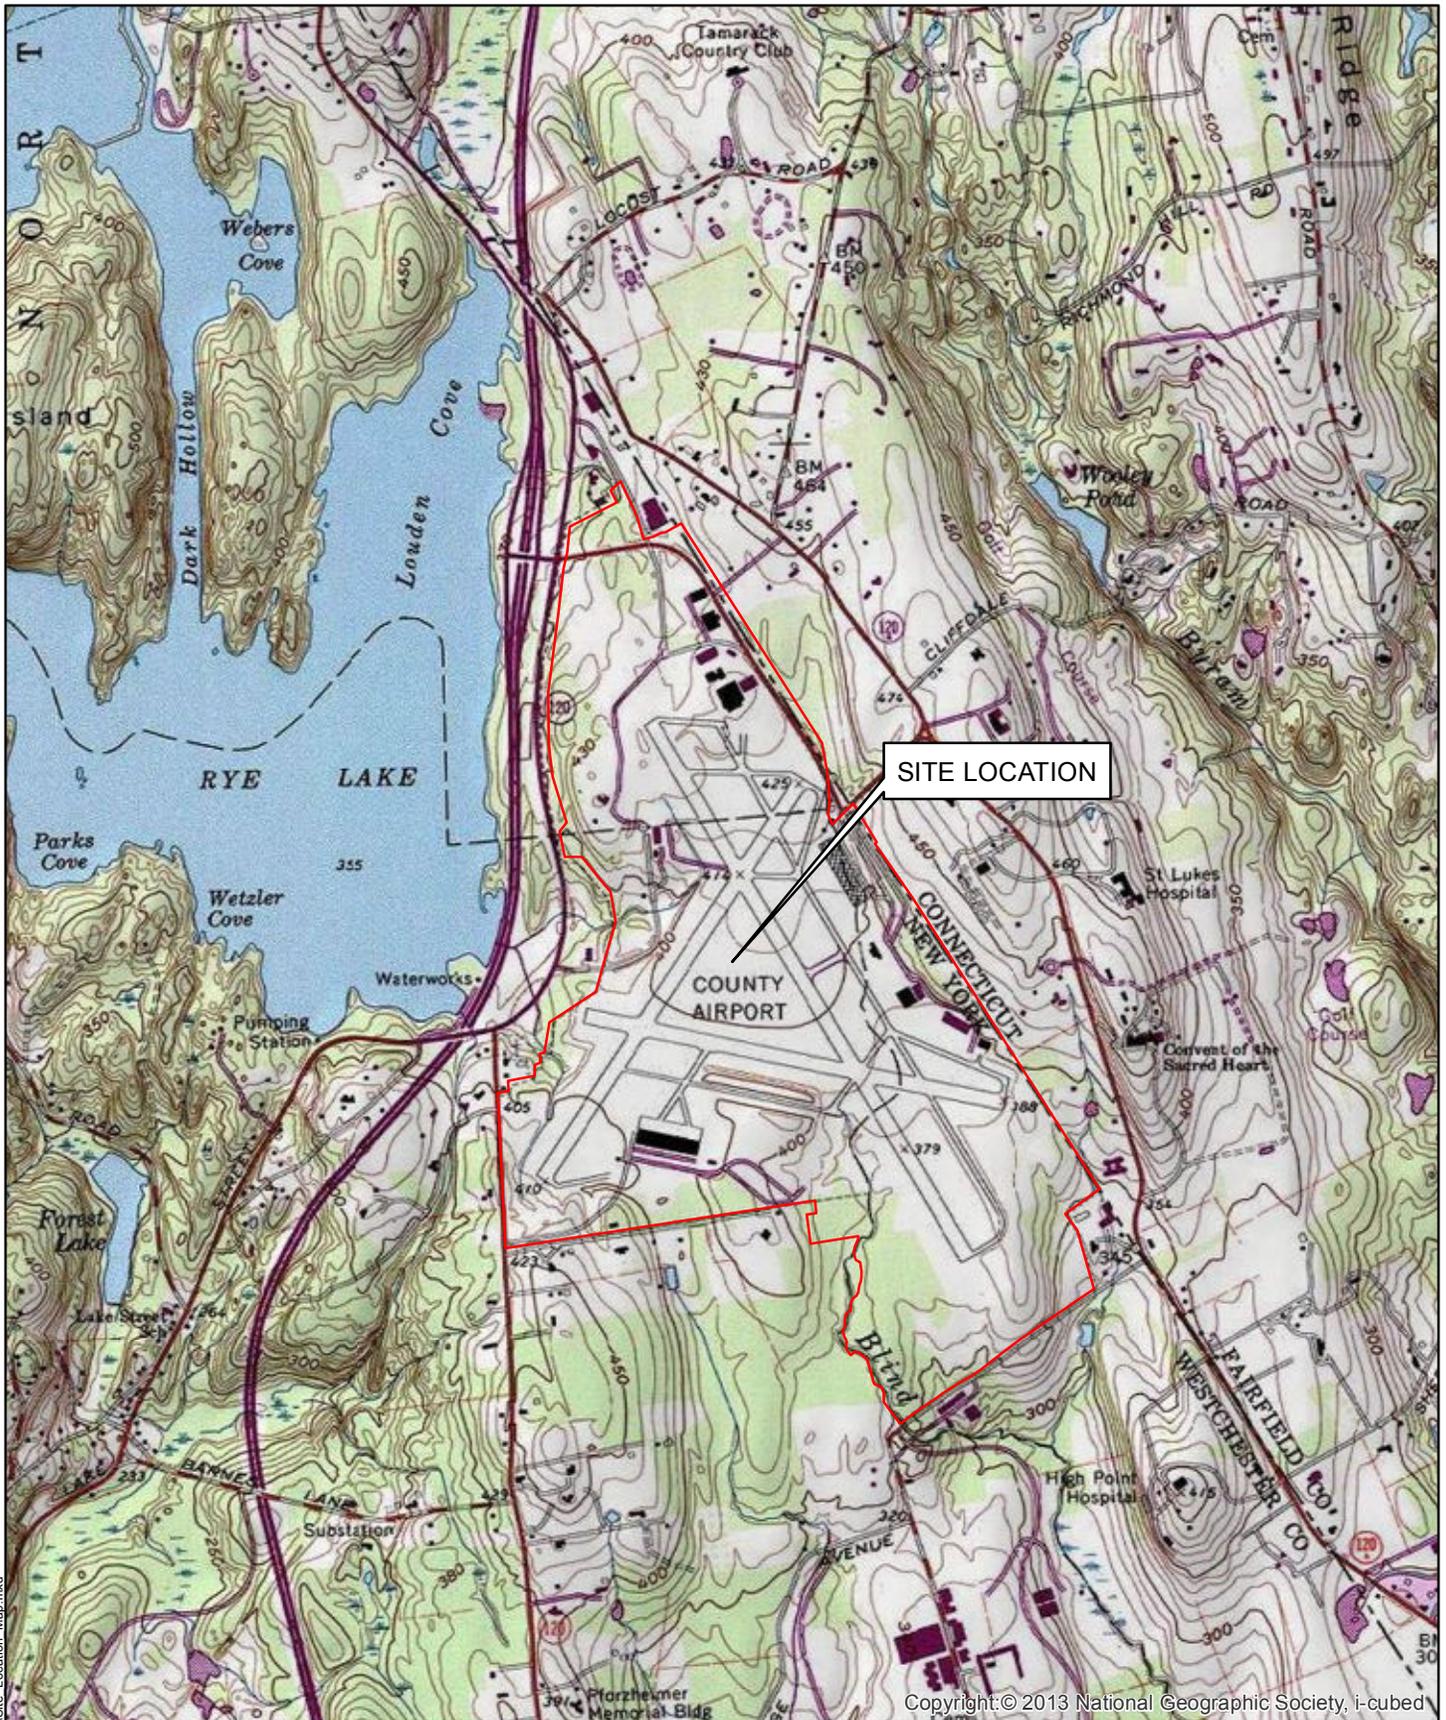


Copyright: © 2013 National Geographic Society, i-cubed

**Westchester County Airport,  
NYSDEC Site No. 360174**

0 500 1,000 2,000 Feet



1 inch = 2,000 feet



**FIRST ENVIRONMENT**

OF-7/OF-4 IRM  
WESTCHESTER COUNTY AIRPORT  
White Plains, Westchester County, New York  
FIGURE 1  
SITE TOPOGRAPHIC LOCATION MAP

91 Fulton Street  
Boonton, New Jersey 07005


Revised	Drawn	Checked	Approved	Date
	LS	SG	SG	7/2/2019



Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community

Source: TRC Engineers, Inc. Existing (2019) Conditions Drainage Area Map. Nov. 2010.

Westchester County Airport, NYSDEC Site No. 360174



**FIRST ENVIRONMENT**


91 Fulton Street  
Boonton, New Jersey 07005

OF-7/OF-4 IRM WESTCHESTER COUNTY AIRPORT White Plains, Westchester County, New York				
FIGURE 2 SURFACE WATER DRAINAGE MAP				
Revised	Drawn	Checked	Approved	Date
	LS	SG	SG	2/6/2020

**Legend**


- Outfall Location
- Former AFFF Burn Pit
- Subsurface Catch Basin
- Detention Basin
- Streams (USGS NHD)
- Active Fire Training & Testing Area
- Open Catch Area
- Property Boundary

I:\WESTCHESTER AIRPORT Site Characterization\Figure3 - Surface Water Drainage Map.mxd

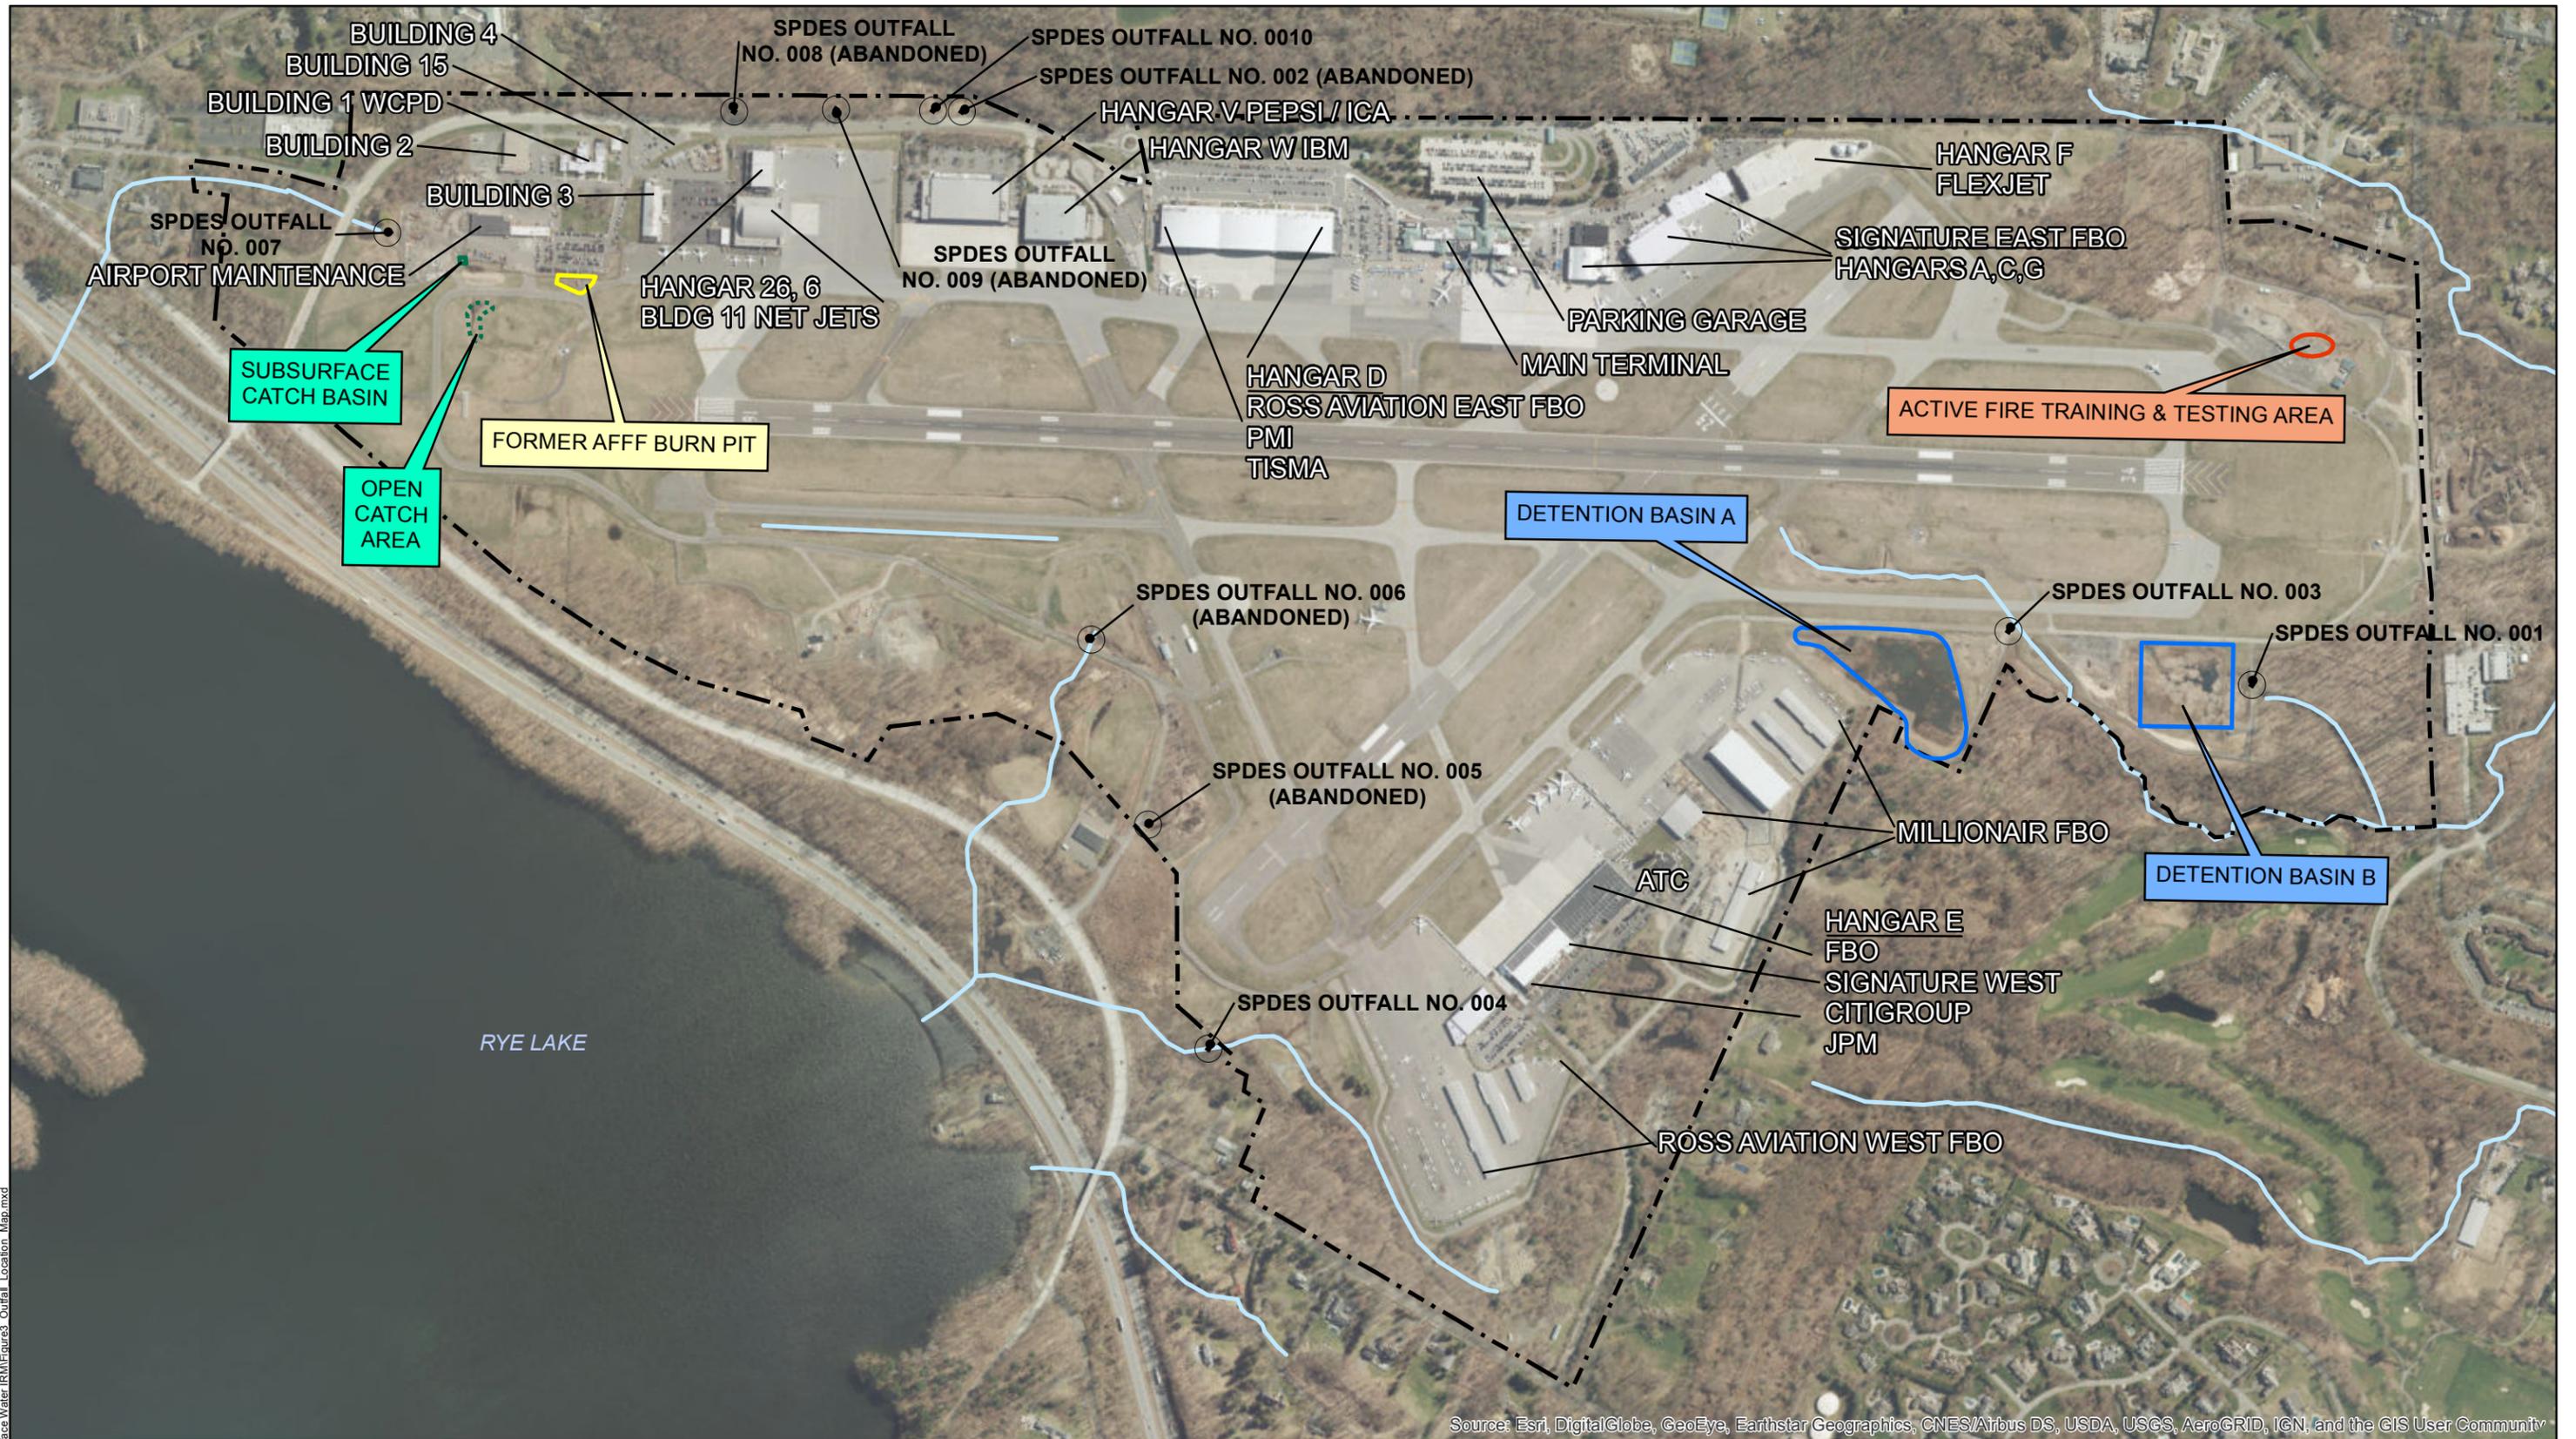

Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community

Westchester County Airport, NYSDEC Site No. 360174



**Legend**

- Outfall Location
- ▭ Active Fire Training & Testing
- ▭ Subsurface Catch Basin
- ▭ Detention Basin
- Streams (USGS NHD)
- ▭ Former AFFF Burn Pit
- ▭ Open Catch Area
- ▭ Property Boundary



OF-7/OF-4 IRM WESTCHESTER COUNTY AIRPORT White Plains, Westchester County, New York				
FIGURE 3 OUTFALL LOCATION MAP				
Revised	Drawn	Checked	Approved	Date
91 Fulton Street Boonton, New Jersey 07005	LS	SG	SG	2/6/2020

J:\WESTCHESTER\AIRPORT\Surface Water IRM\Figure3 - Outfall Location Map.mxd




Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community

**Legend**  
 ● Surface Water Sample Location (FE March 2019)  
 ■ Surface Water Sample Location (NYCDEP January 2019)  
 33 - PFOA + PFOS (parts per trillion)  
 OF - Outfall  
 SW - Surface Water

○ Outfall Location  
 — Streams (USGS NHD)  
 ■ Active Fire Training & Testing Area  
 ■ Former AFFF Burn Pit  
 ■ Subsurface Catch Basin  
 ■ Open Catch Area  
 ■ Detention Basin  
 ■ Property Boundary


**Westchester County Airport, NYSDEC Site No. 360174**  
 Sources  
 Outfall Locations: TRC Engineers, Inc. Existing (2019)  
 Conditions Drainage Area Map. Nov. 2010.  
 Streams: USGS National Hydrography Dataset.



**FIRST ENVIRONMENT**  
 91 Fulton Street  
 Boonton, New Jersey 07005

SURFACE WATER IRM WESTCHESTER COUNTY AIRPORT White Plains, Westchester County, New York FIGURE 4 PFOA/PFOS SURFACE WATER CONCENTRATIONS			
Revised	Drawn	Checked	Approved
	LS	SG	SG
			Date
			4/2/2020


I:\WESTCHESTER\AIRPORT\Surface Water\IRM\Figure4\_PFOA/PFOS\_Surface\_Water\_Concentrations.mxd

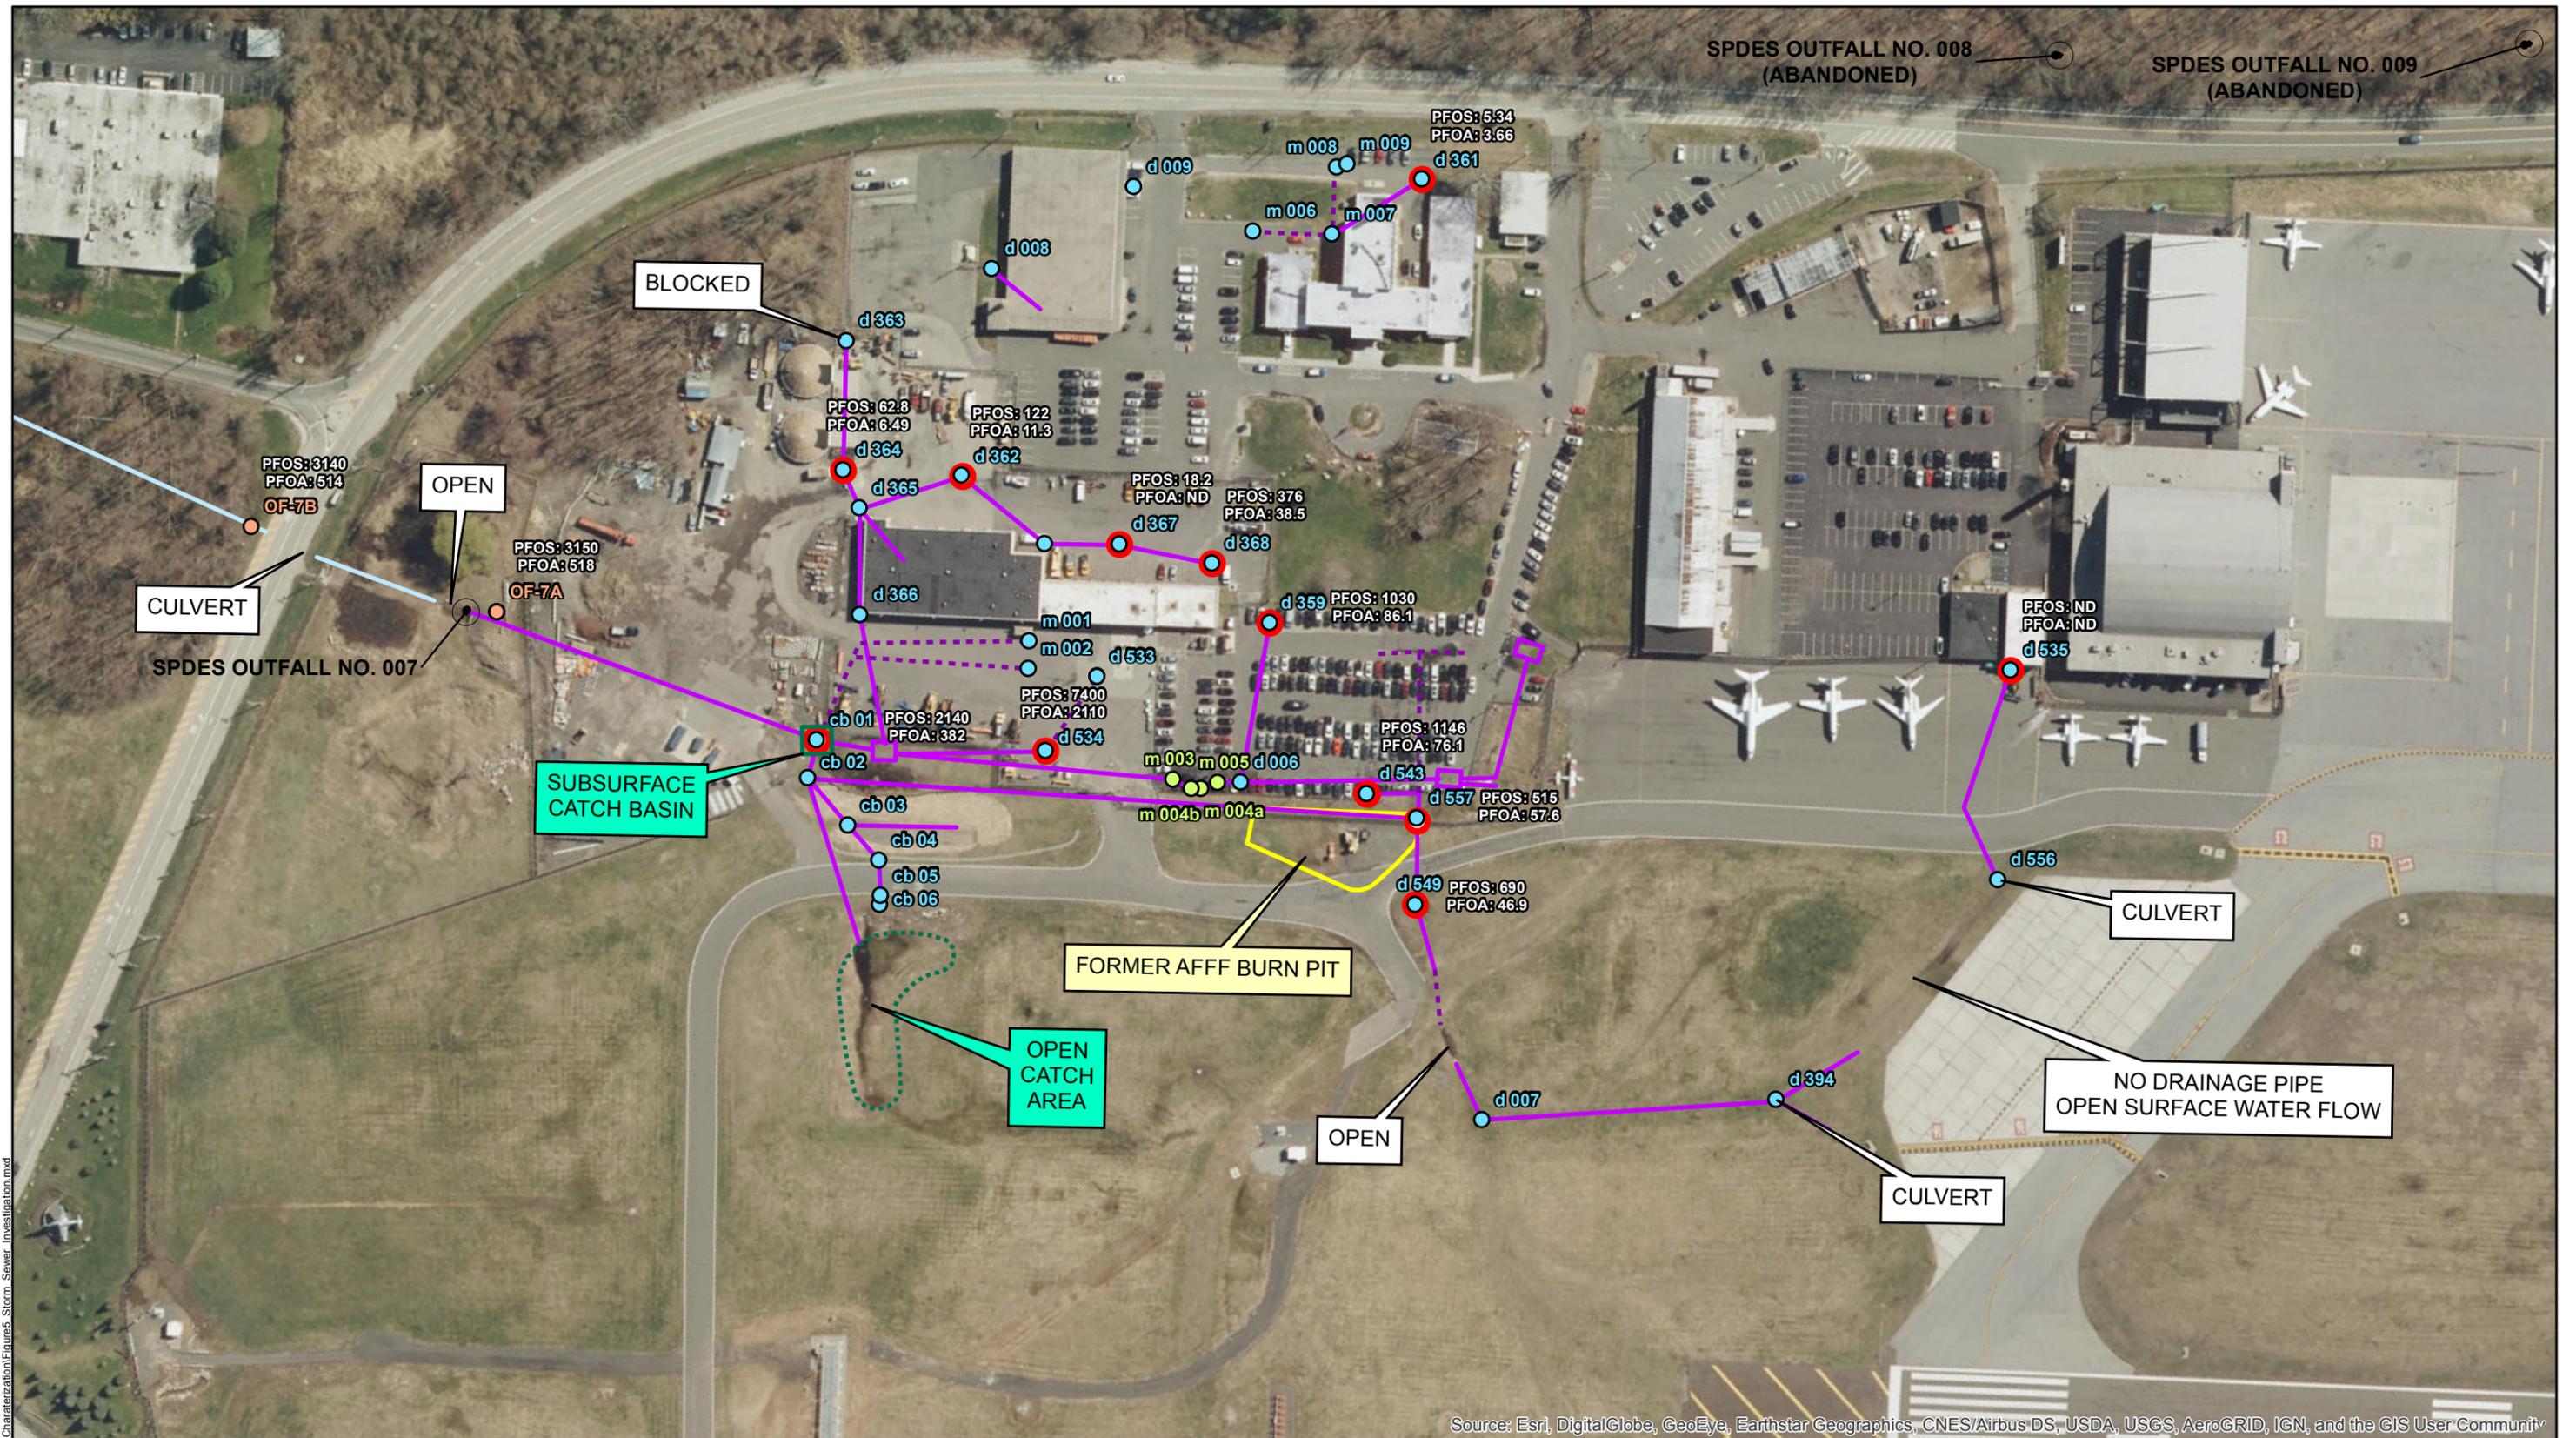

Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community

<b>Legend</b> ○ Drainage Water PFAS Sample ● Outfall PFAS Sample 690 PFOA/PFOS (ppt)		○ Outfall Location ● Manhole ● Catch Basin		— Observed Drainage Pipe - - - Inferred Drainage Pipe — Streams (USGS NHD)		▭ Subsurface Catch Basin ▭ Open Catch Area ▭ Former AFFF Burn Pit		Westchester County Airport, NYSDEC Site No. 360174 0 37.5 75 150 Feet 1 inch = 152 feet 		<b>FIRST ENVIRONMENT</b> 91 Fulton Street Boonton, New Jersey 07005		OF-7/OF-4 IRM WESTCHESTER COUNTY AIRPORT White Plains, Westchester County, New York <b>FIGURE 5</b> STORM SEWER INVESTIGATION		Revised Drawn LS		Checked DL		Approved SG		Date 10/24/2019	
---	--	--	--	--	--	---	--	---	--	---	--	--	--	------------------------	--	---------------	--	----------------	--	--------------------	--


I:\WESTCHESTER\REPORTS\Site Characterization\Figure5\_Storm\_Sewer\_Investigation.mxd

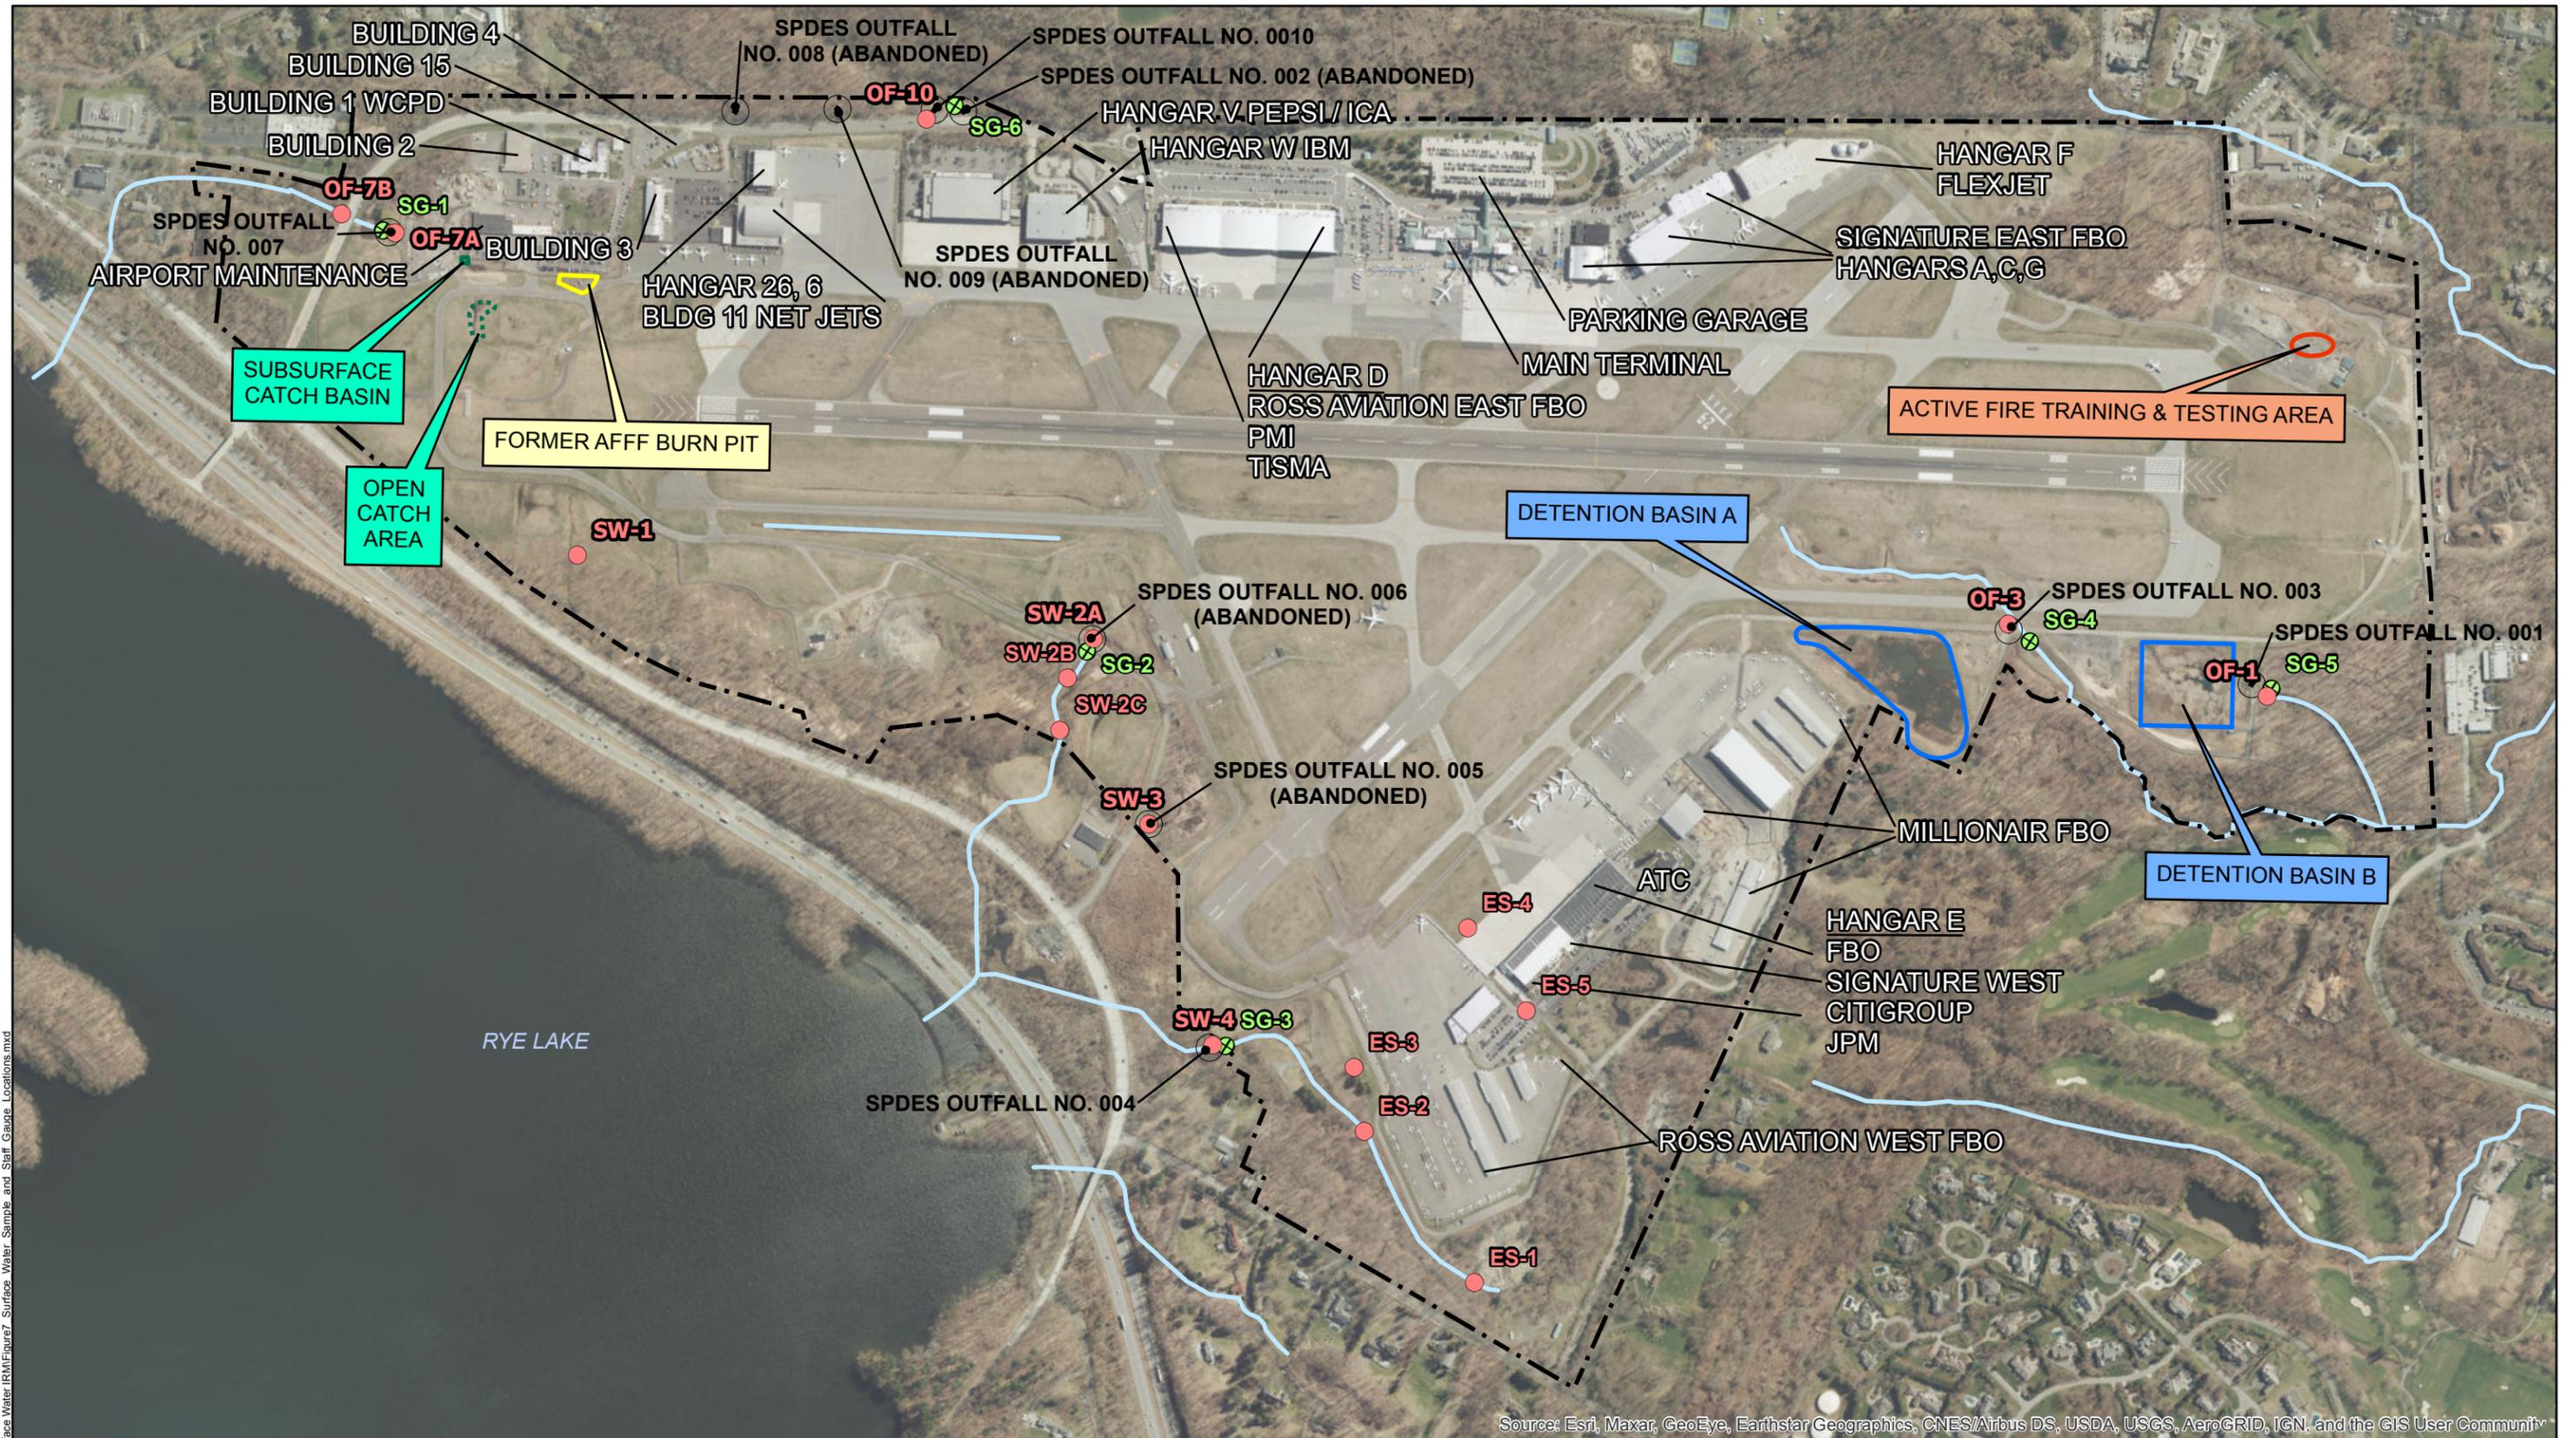

Source: Esri, Maxar, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community

**Legend**


- Surface Water Sample Location
  - ⊕ Staff Gauge Location
  - Outfall Location
  - ▭ Active Fire Training & Testing Area
  - ▭ Former AFFF Burn Pit
  - ▭ Streams (USGS NHD)
  - ▭ Subsurface Catch Basin
  - ▭ Open Catch Area
  - ▭ Detention Basin
  - ▭ Property Boundary
- SPDES - State Pollutant Discharge Elimination System



Sources  
 Streams: USGS National Hydrography Dataset.  
 Outfall Locations: TRC Engineers, Inc. Existing (2019) Conditions Drainage Area Map. Nov. 2010.

<b>FIRST ENVIRONMENT</b>			
OF-7/OF-4 IRM WESTCHESTER COUNTY AIRPORT White Plains, Westchester County, New York <b>FIGURE 7</b> SEDIMENT/SURFACE WATER SAMPLE & STAFF GAUGE LOCATIONS			
91 Fulton Street Boonton, New Jersey 07005	Revised LS	Checked SG	Approved SG Date 9/4/2020

I:\WESTCHESTER\AIRPORT\Surface Water\IRM\Figure7\_Surface Water\_Sample and Staff Gauge Locations.mxd

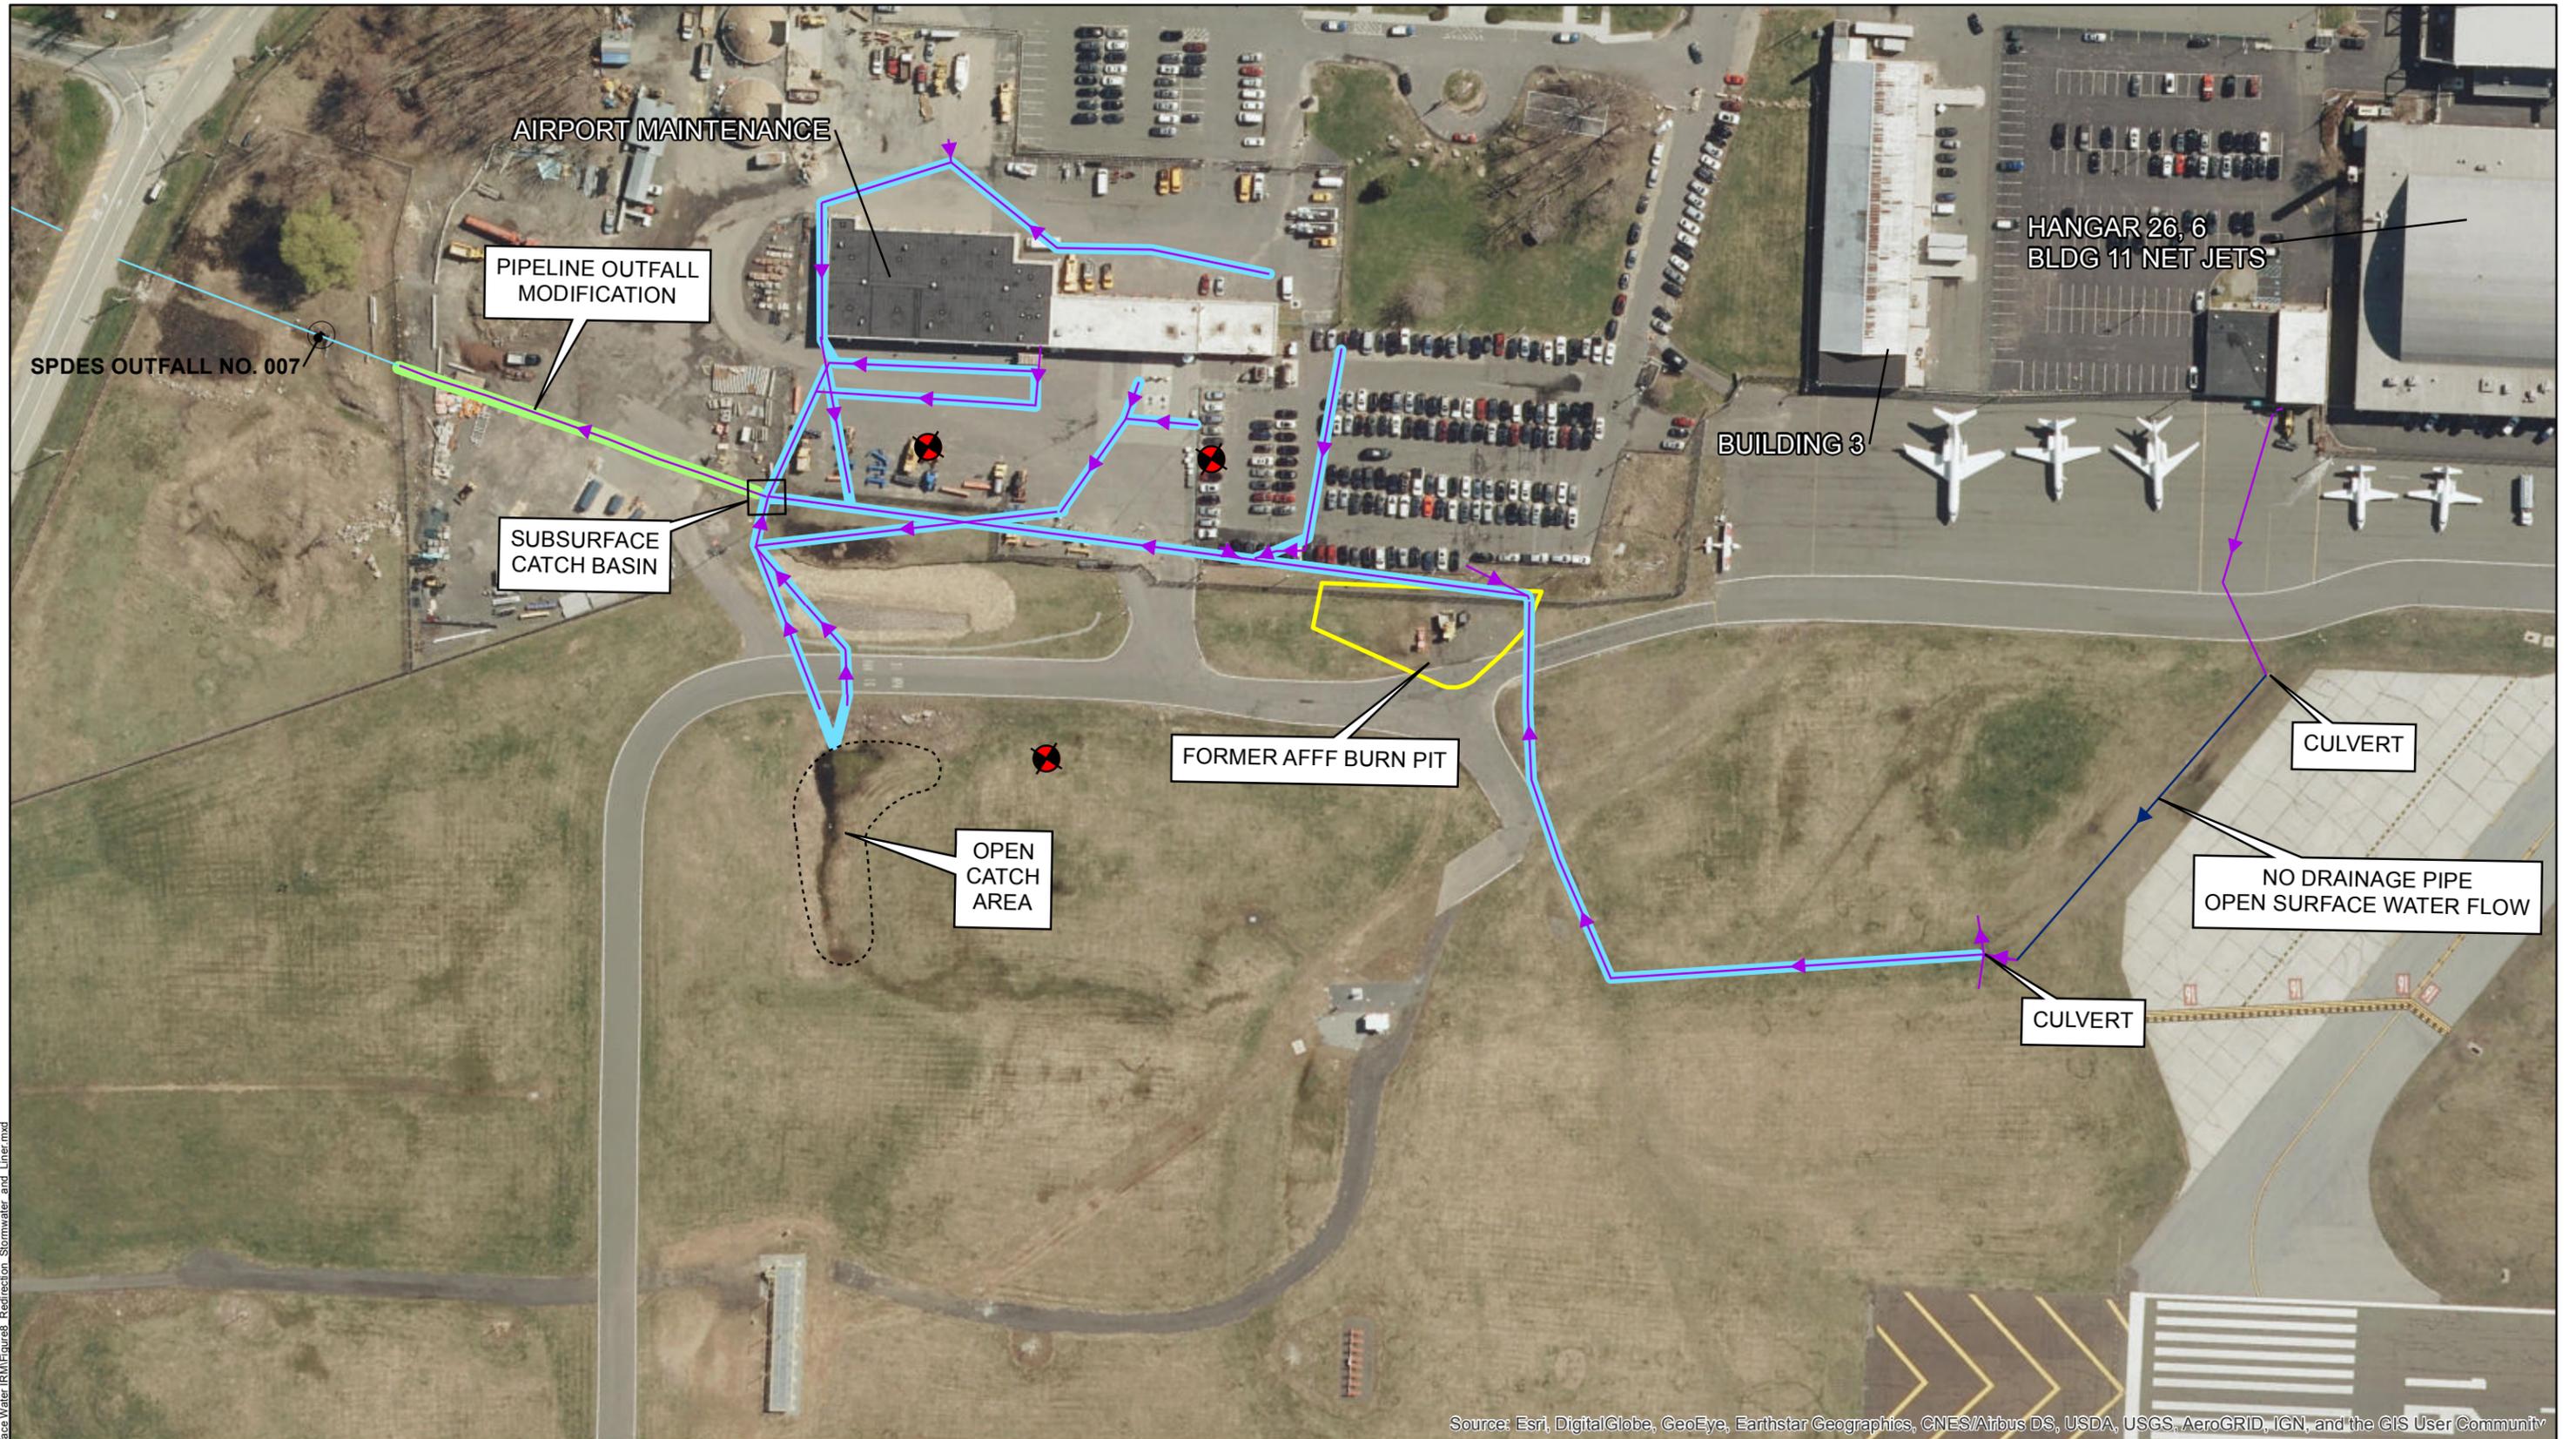


Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community

**Legend**


-  Proposed Monitoring Well
  -  Proposed Lined Storm Sewer
  -  Sealed New Line Installed
  -  Modified and Sealed to Prevent a Groundwater Pathway
  -  Drainage Pipe/Storm Sewer Water Flow Direction
  -  No Drainage Pipe/Open Water Flow Direction
  -  Outfall Location
  -  Open Catch Area
  -  Subsurface Catch Basin
  -  Former AFFF Burn Pit
- SPDES - State Pollutant Discharge Elimination System

Westchester County Airport, NYSDEC Site No. 360174




	OF-7/OF-4 IRM WESTCHESTER COUNTY AIRPORT White Plains, Westchester County, New York			
	FIGURE 8 STORM SEWER REPLACEMENT LOCATION MAP			
91 Fulton Street Boonton, New Jersey 07005	Revised LS	Drawn LS	Checked SG	Approved SG
				Date 2/6/2020

J:\WESTCHESTER\AIRPORT\Surface Water IRM\Figure8 - Redirection Stormwater and Limer.mxd

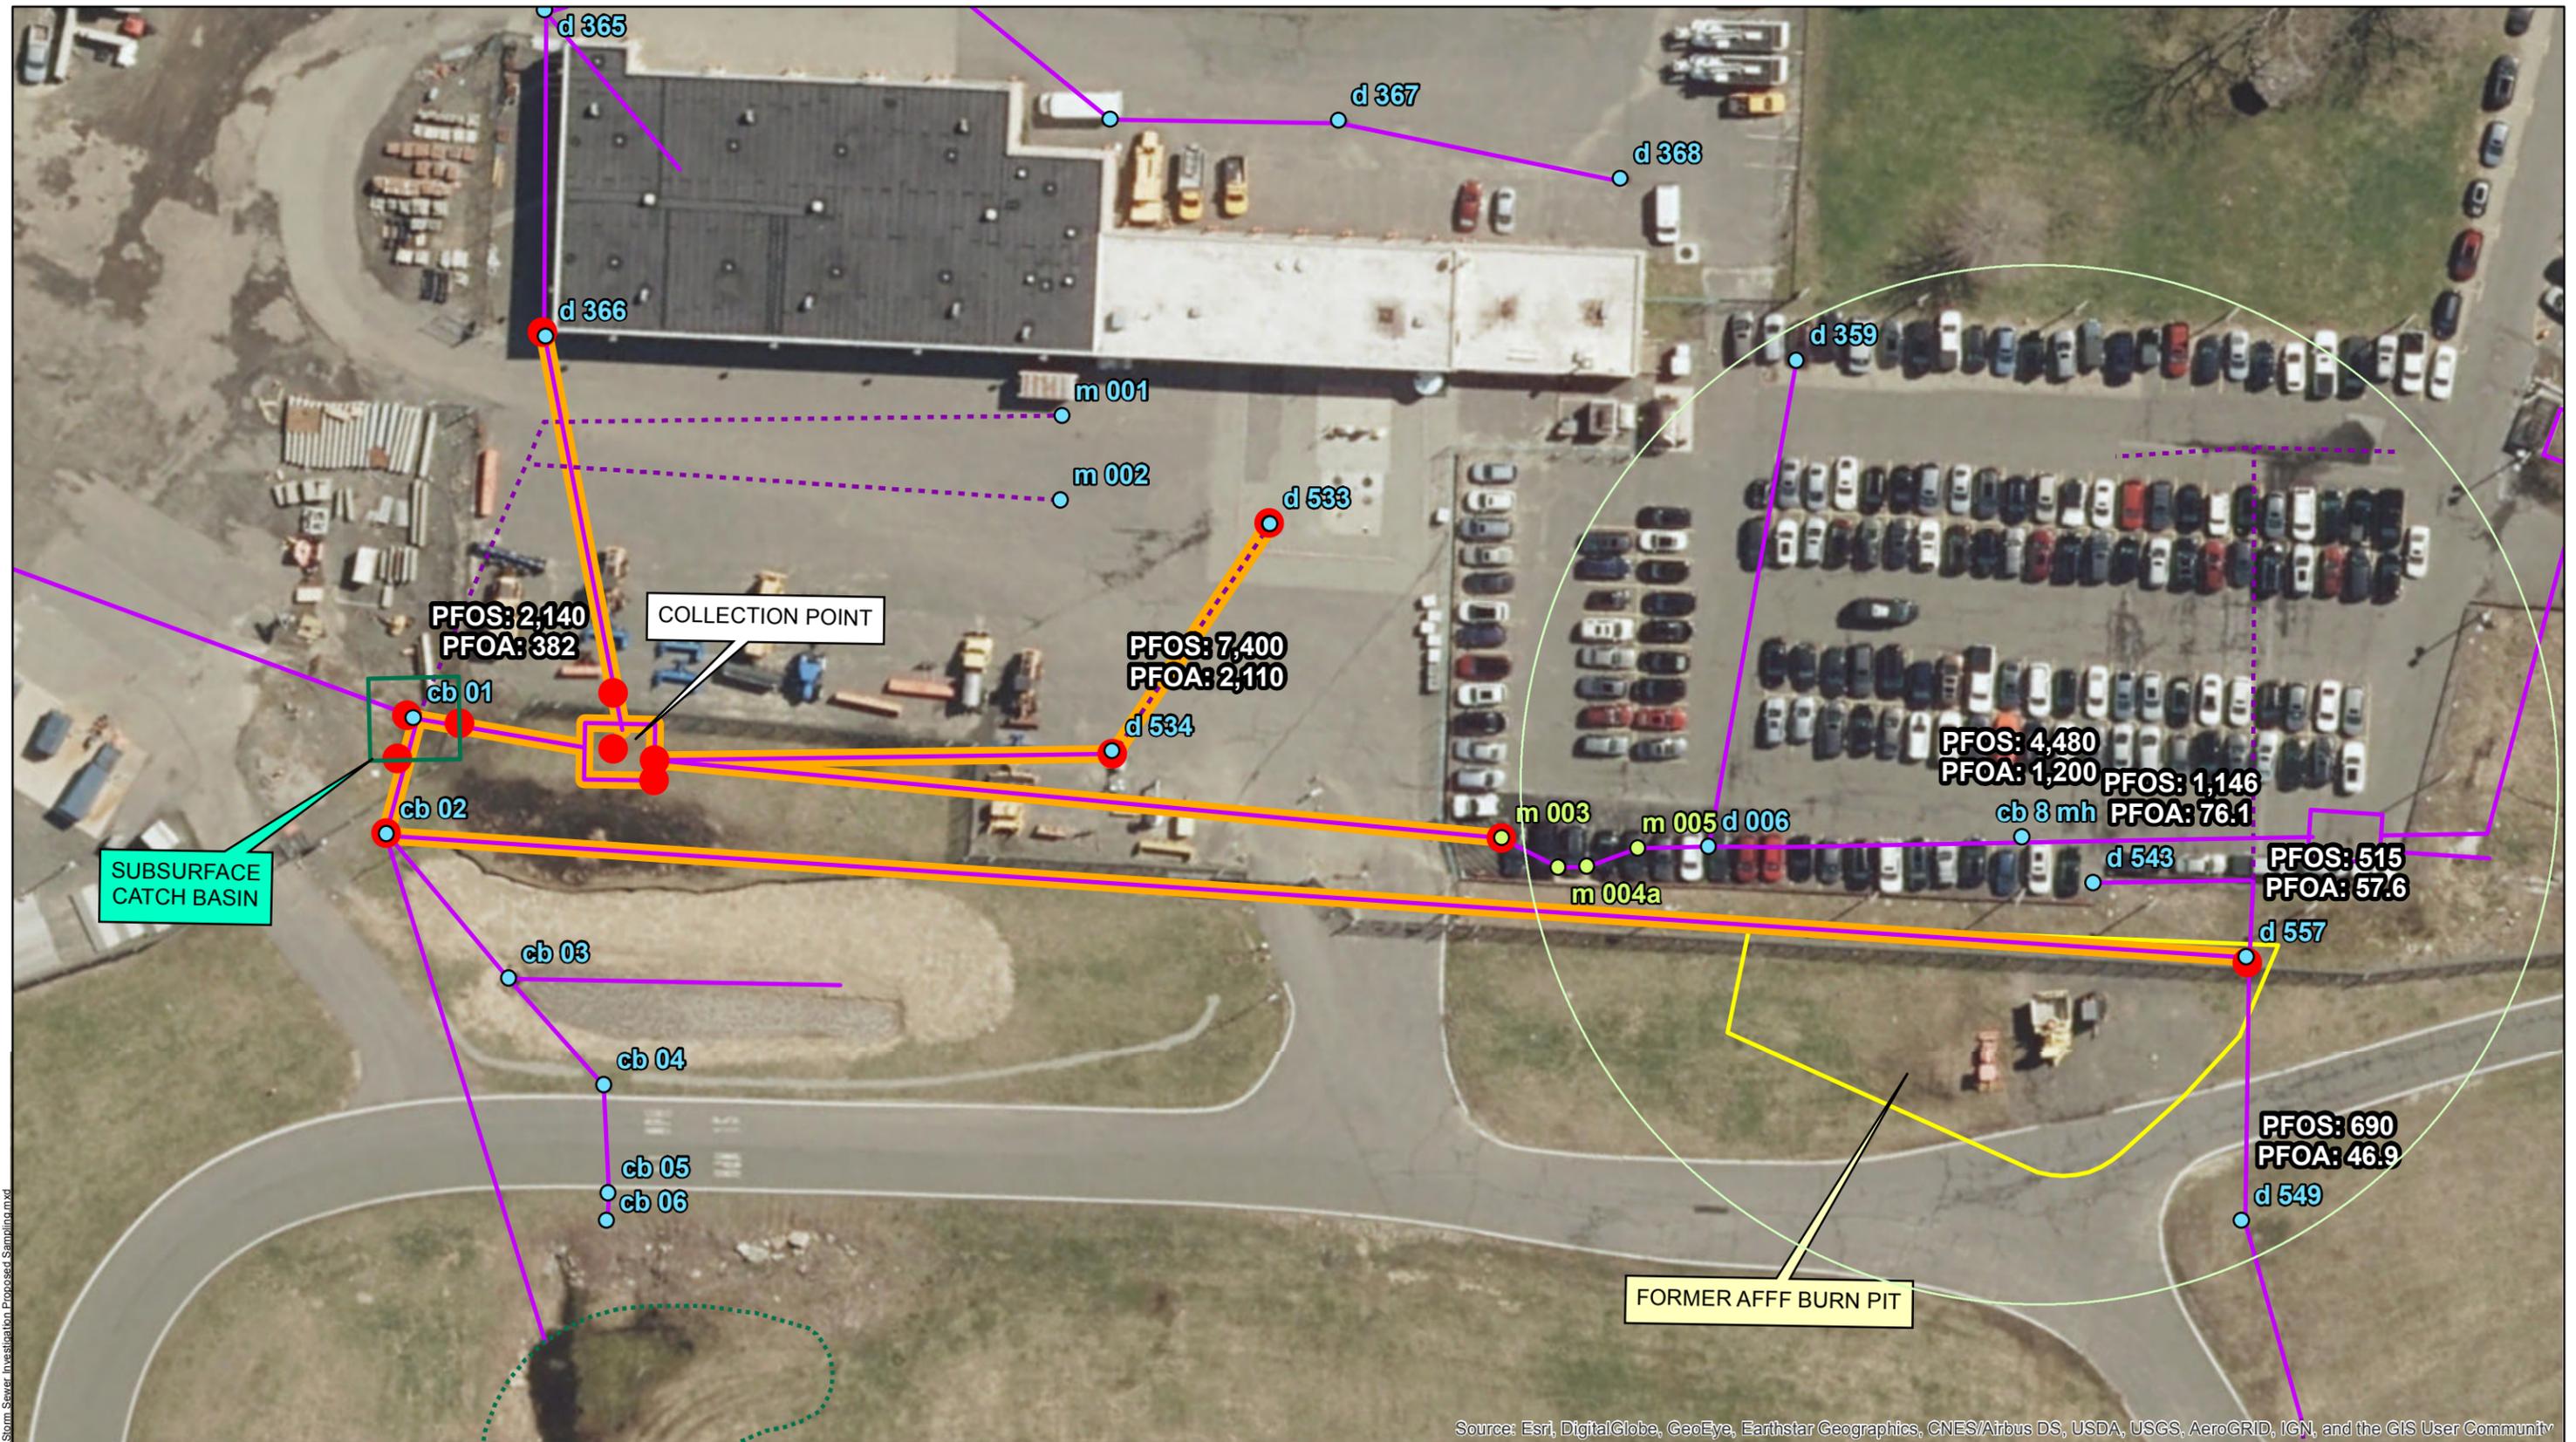

Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community

Westchester County Airport, NYSDEC Site No. 360174



Legend	
<span style="color: red;">●</span> Proposed Sample Locations	<span style="border: 1px solid black; border-radius: 50%; padding: 2px;"> </span> Outfall
<span style="background-color: yellow; border: 1px solid black; width: 20px; height: 10px; display: inline-block;"></span> Proposed Sampling Area	<span style="color: green;">●</span> Manhole
<span style="border: 1px solid cyan; padding: 2px;">690</span> PFOA/PFOS (ppt)	<span style="color: blue;">●</span> Catch Basin
<span style="border: 1px solid yellow; padding: 2px;"> </span> Former AFFF Burn Pit	<span style="border: 1px dashed cyan; padding: 2px;"> </span> Open Catch Area
<span style="border: 1px solid cyan; padding: 2px;"> </span> Subsurface Catch Basin	<span style="border: 1px solid purple; padding: 2px;"> </span> Observed Drainage Pipe
<span style="border: 1px dashed purple; padding: 2px;"> </span> Inferred Drainage Pipe	<span style="border: 1px solid green; padding: 2px;"> </span> Area Requiring Further Evaluation

**FIRST ENVIRONMENT**


91 Fulton Street  
Boonton, New Jersey 07005

STORM SEWER INVESTIGATION  
WESTCHESTER COUNTY AIRPORT  
White Plains, Westchester County, New York

**FIGURE 9  
PROPOSED SAMPLING LOCATIONS**

Revised	Drawn	Checked	Approved	Date
	LS	DL	SG	2/10/2020

I:\WESTCHESTER\AIRPORT\GIS\Storm Sewer Investigation\Proposed Sampling.mxd

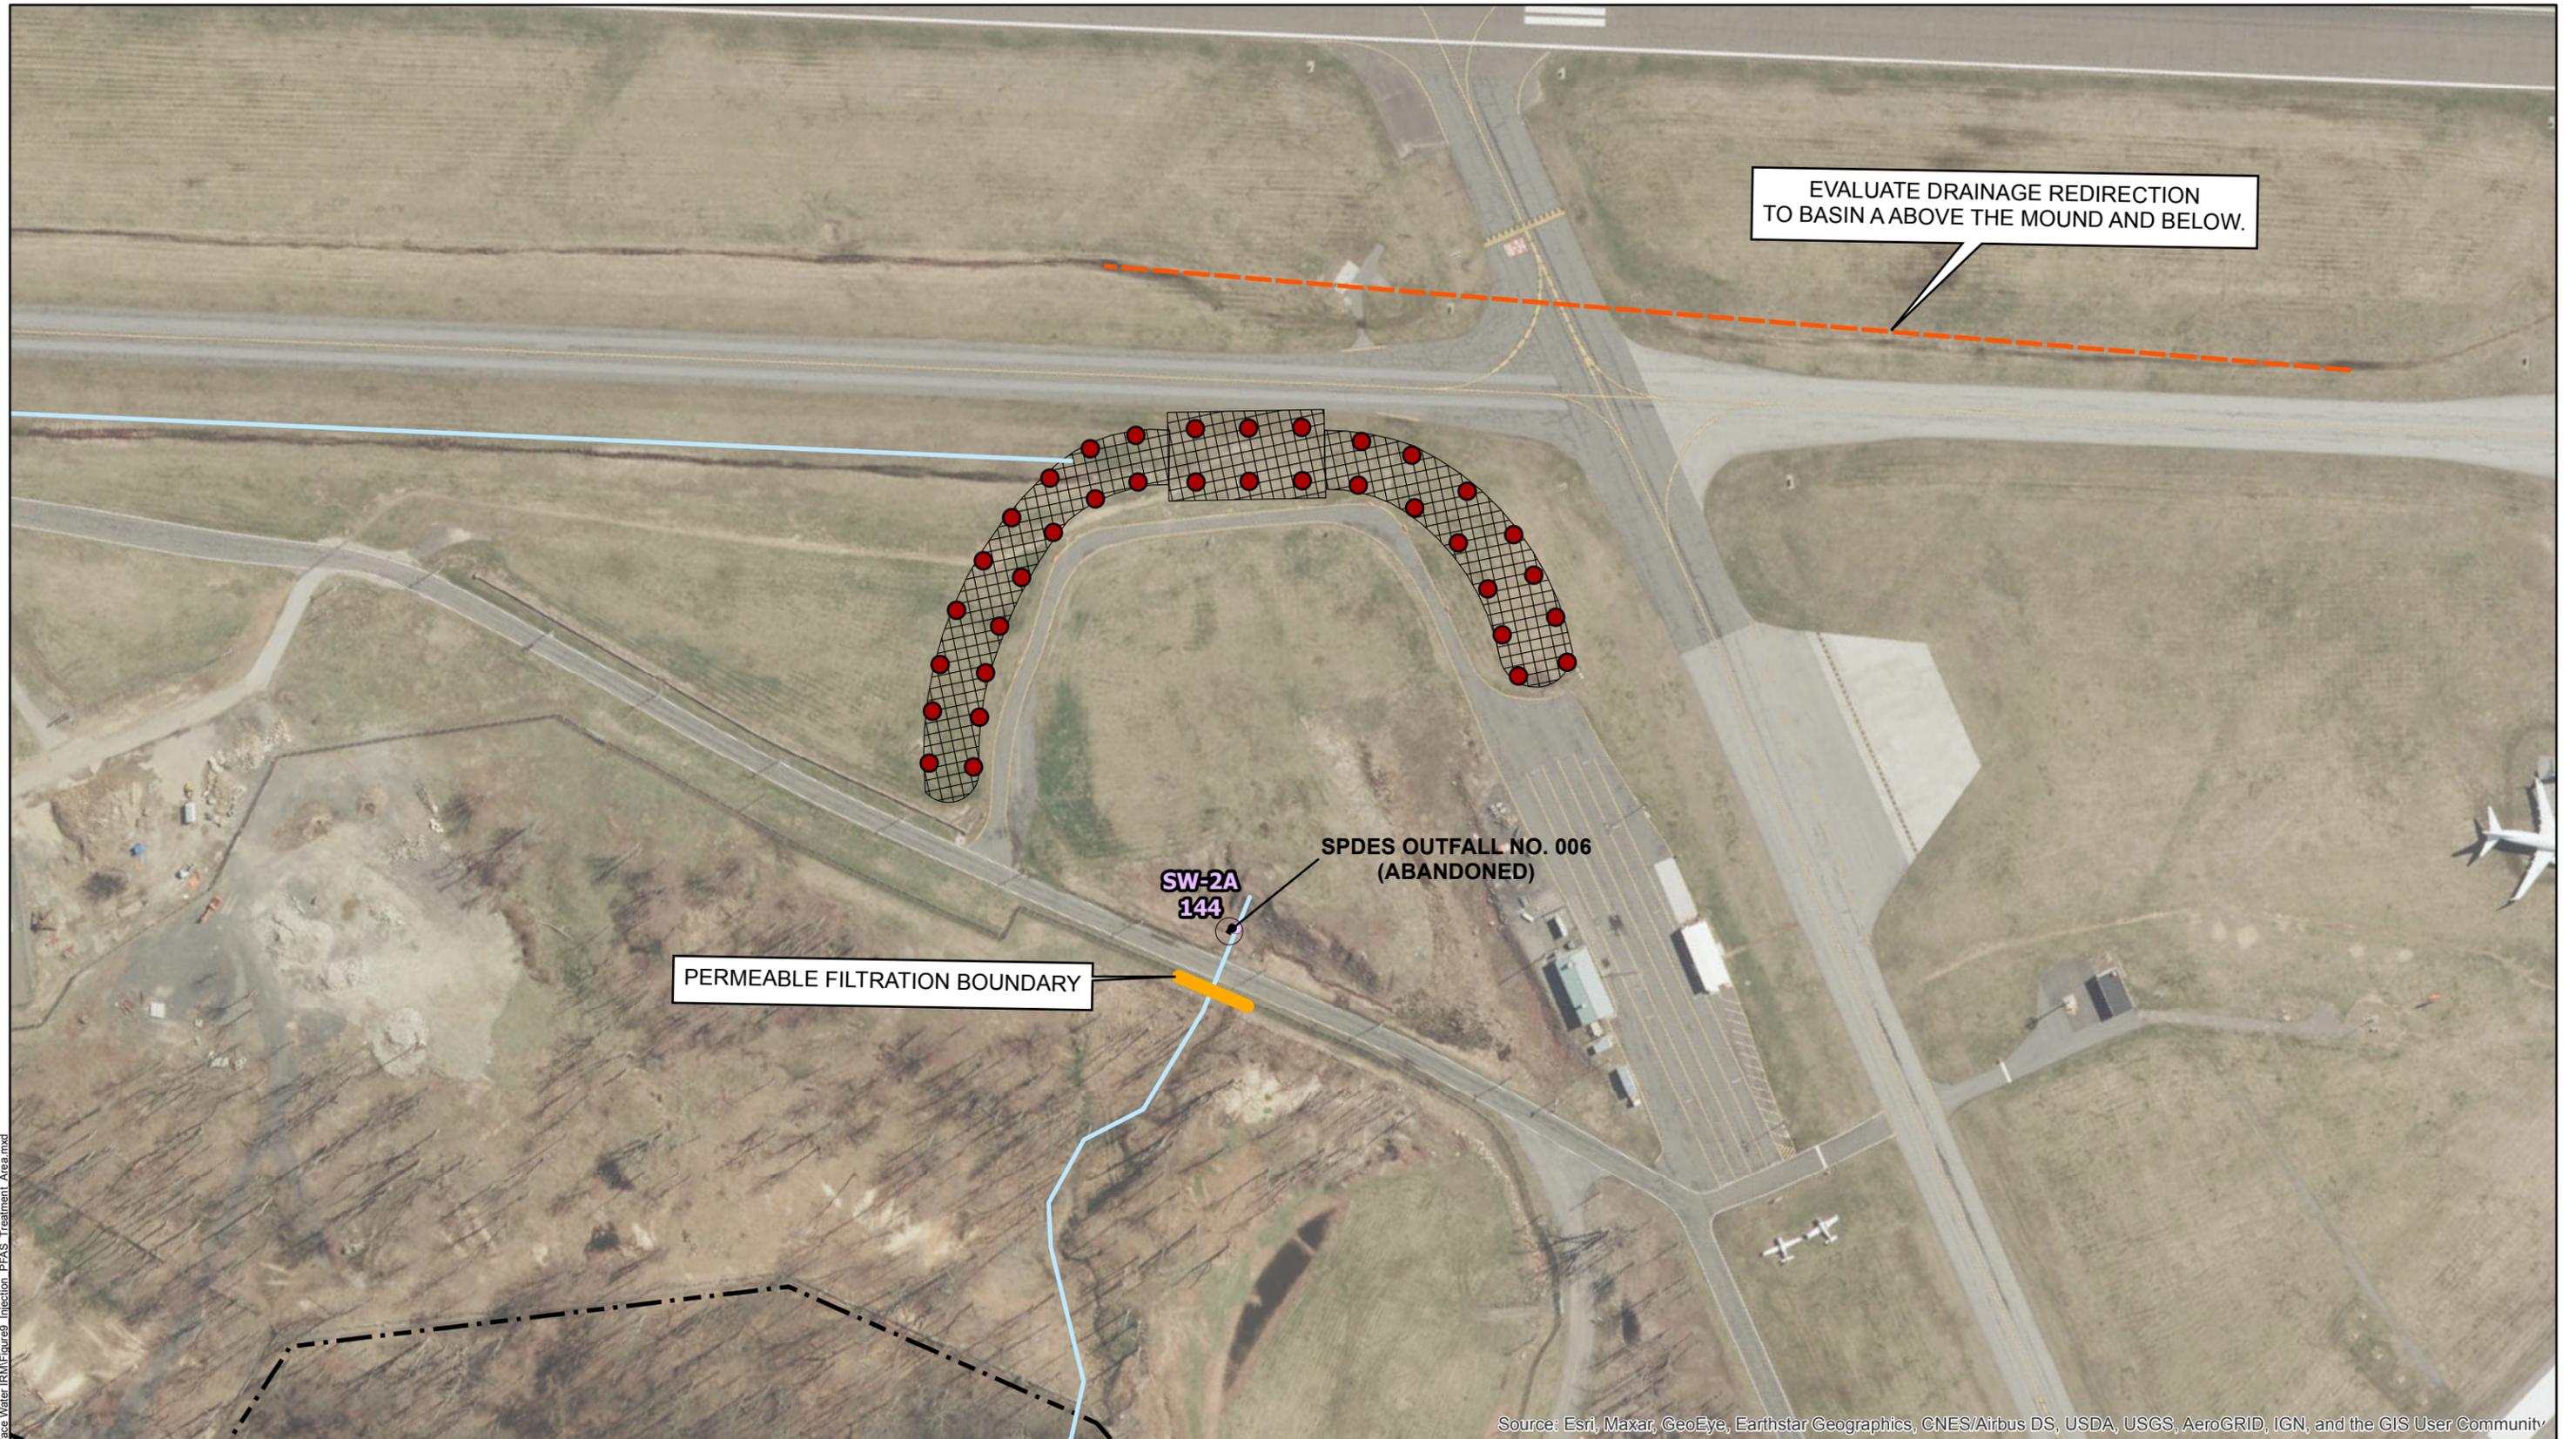

EVALUATE DRAINAGE REDIRECTION TO BASIN A ABOVE THE MOUND AND BELOW.

PERMEABLE FILTRATION BOUNDARY

SW-2A  
144

SPDES OUTFALL NO. 006  
(ABANDONED)

Source: Esri, Maxar, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community

I:\WESTCHESTER\AIRPORT\Surface Water IRM\Figure9 Injection PFAS Treatment Area.mxd


**Legend**

- Injection Point Location
- ◻ Outfall Location
- Surface Water Sample Location
- 144 - PFOA + PFOS (parts per trillion)
- SW - Surface Water

- ▣ Proposed Injection Treatment Area\*
- Evaluate Drainage Redirection to Basin A Above the Mound and Below
- Streams (USGS NHD)
- Property Boundary


\*Potential injection area. Area to be investigation further.

Sources  
Streams: USGS National Hydrography Dataset.




	OF-7/OF-4 IRM WESTCHESTER COUNTY AIRPORT White Plains, Westchester County, New York FIGURE 10 PLUMESTOP INJECTION PILOT TEST			
	Revised 91 Fulton Street Boonton, New Jersey 07005	Drawn LS	Checked SG	Approved SG

## **APPENDIX A**

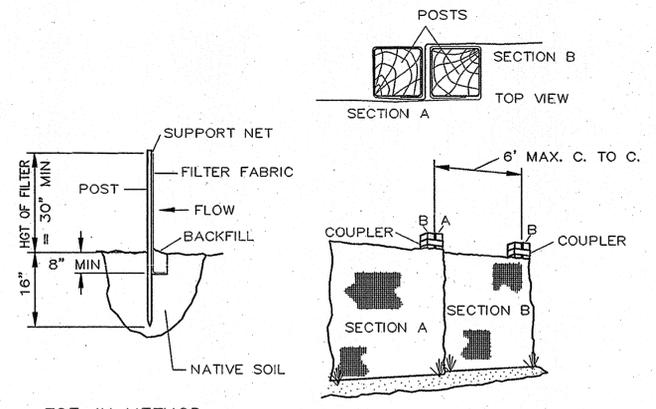


- INSTALLATION NOTES**
- EXCAVATE A 4 INCH \* 4 INCH TRENCH ALONG THE LOWER PERIMETER OF THE SITE.
  - UNROLL A SECTION AT A TIME AND POSITION POSTS AGAINST THE BACK (DOWNSTREAM) WALL OF THE TRENCH (NET SIDE AWAY FROM DIRECTION OF FLOW).
  - DRIVE THE POST INTO THE GROUND UNTIL THE NETTING IS APPROXIMATELY 2 INCHES FROM THE TRENCH BOTTOM.
  - LAY THE TOE-IN FLAP OF FABRIC ONTO THE UNDISTURBED BOTTOM OF THE TRENCH. BACKFILL THE TRENCH AND TAMP THE SOIL. STEEPER SLOPES REQUIRE AN INTERCEPT TRENCH.
  - JOIN SECTIONS AS SHOWN ABOVE.

**SILT FENCE**  
ITEM 209.01

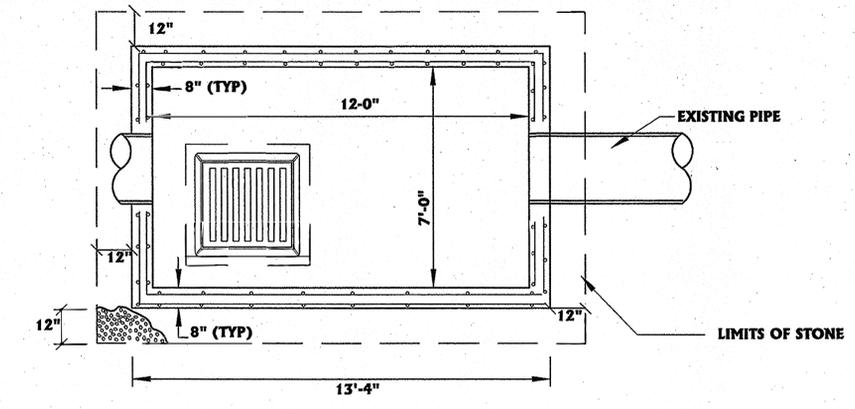


**PLAN VIEW**  
N.T.S.



**PLAN**


**NOTE:**  
STANDARD FRAME & GRATE:  
Campbell Pat. No.  
Neesen Pat. No.  
OR APPROVED EQUAL




**STEP DETAIL**




**JOINT DETAIL**  
N.T.S.

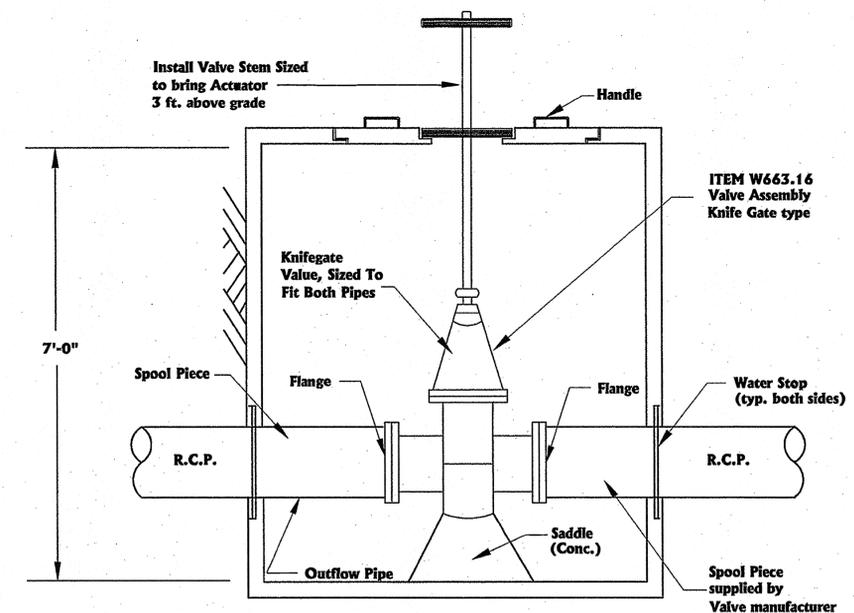

**VALVE DETAILS**  
**VALVE CHAMBER**  
ITEM 604.3011

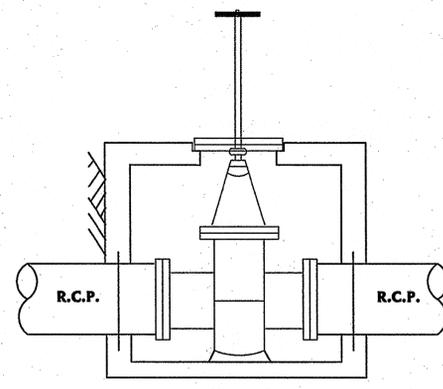

**VALVE CHAMBER**  
5'-0" x 5'-0"

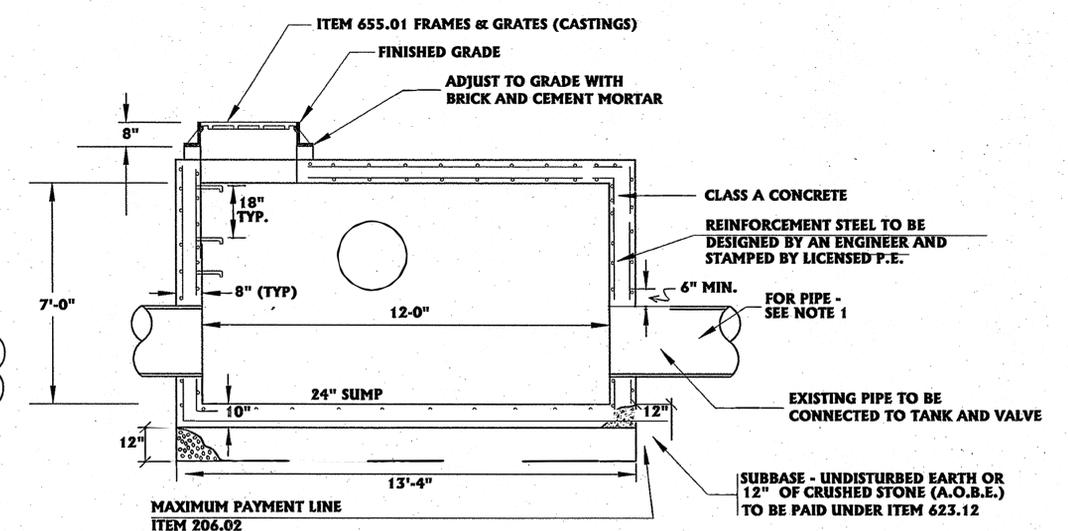

**SECTION**  
**HOLDING TANK**  
ITEM W604.50

- NOTES:**
- Size, type and configuration of pipes shall be as per drawings.
  - Risers as required to achieve specified grades.
  - Steps shall conform to Section 725-02 "Steps for Manholes" of N.Y.S. Standard Specifications.

**IN CHARGE OF:** A. Ventarola  
**MADE BY:** D. Aubry  
**CHECKED BY:** A. Ventarola

REVISION NUMBER	DATE	MADE BY	APP'D BY	REVISION


**RECORD DRAWING CERTIFICATION**

AS BUILT—CHANGES AS NOTED  
 AS BUILT—NO CHANGES

<b>CONTRACTOR</b>		<b>PROJECT COORDINATOR</b>	
NAME _____	NAME _____	NAME _____	NAME _____
SIGNATURE _____	SIGNATURE _____	SIGNATURE _____	SIGNATURE _____
TITLE _____	TITLE _____	TITLE _____	TITLE _____
DATE _____	DATE _____	DATE _____	DATE _____

WESTCHESTER COUNTY, NEW YORK DEPARTMENT OF PUBLIC WORKS DIVISION OF ENGINEERING		PROJECT NUMBER ---	CONTRACT NUMBER 03-235
STORMWATER CONTAINMENT - BUILDING #10 WESTCHESTER COUNTY AIRPORT HARRISON, NORTH CASTLE & RYE BROOK, NY		SHEET NO. 3 OF 3	SCALE: AS SHOWN DATE: 12/10/03
DETAILS		DRAWING NO. 48-16-G-51-0	REV. NO. 0

03-235 12/15/2003 9:42:01 AM

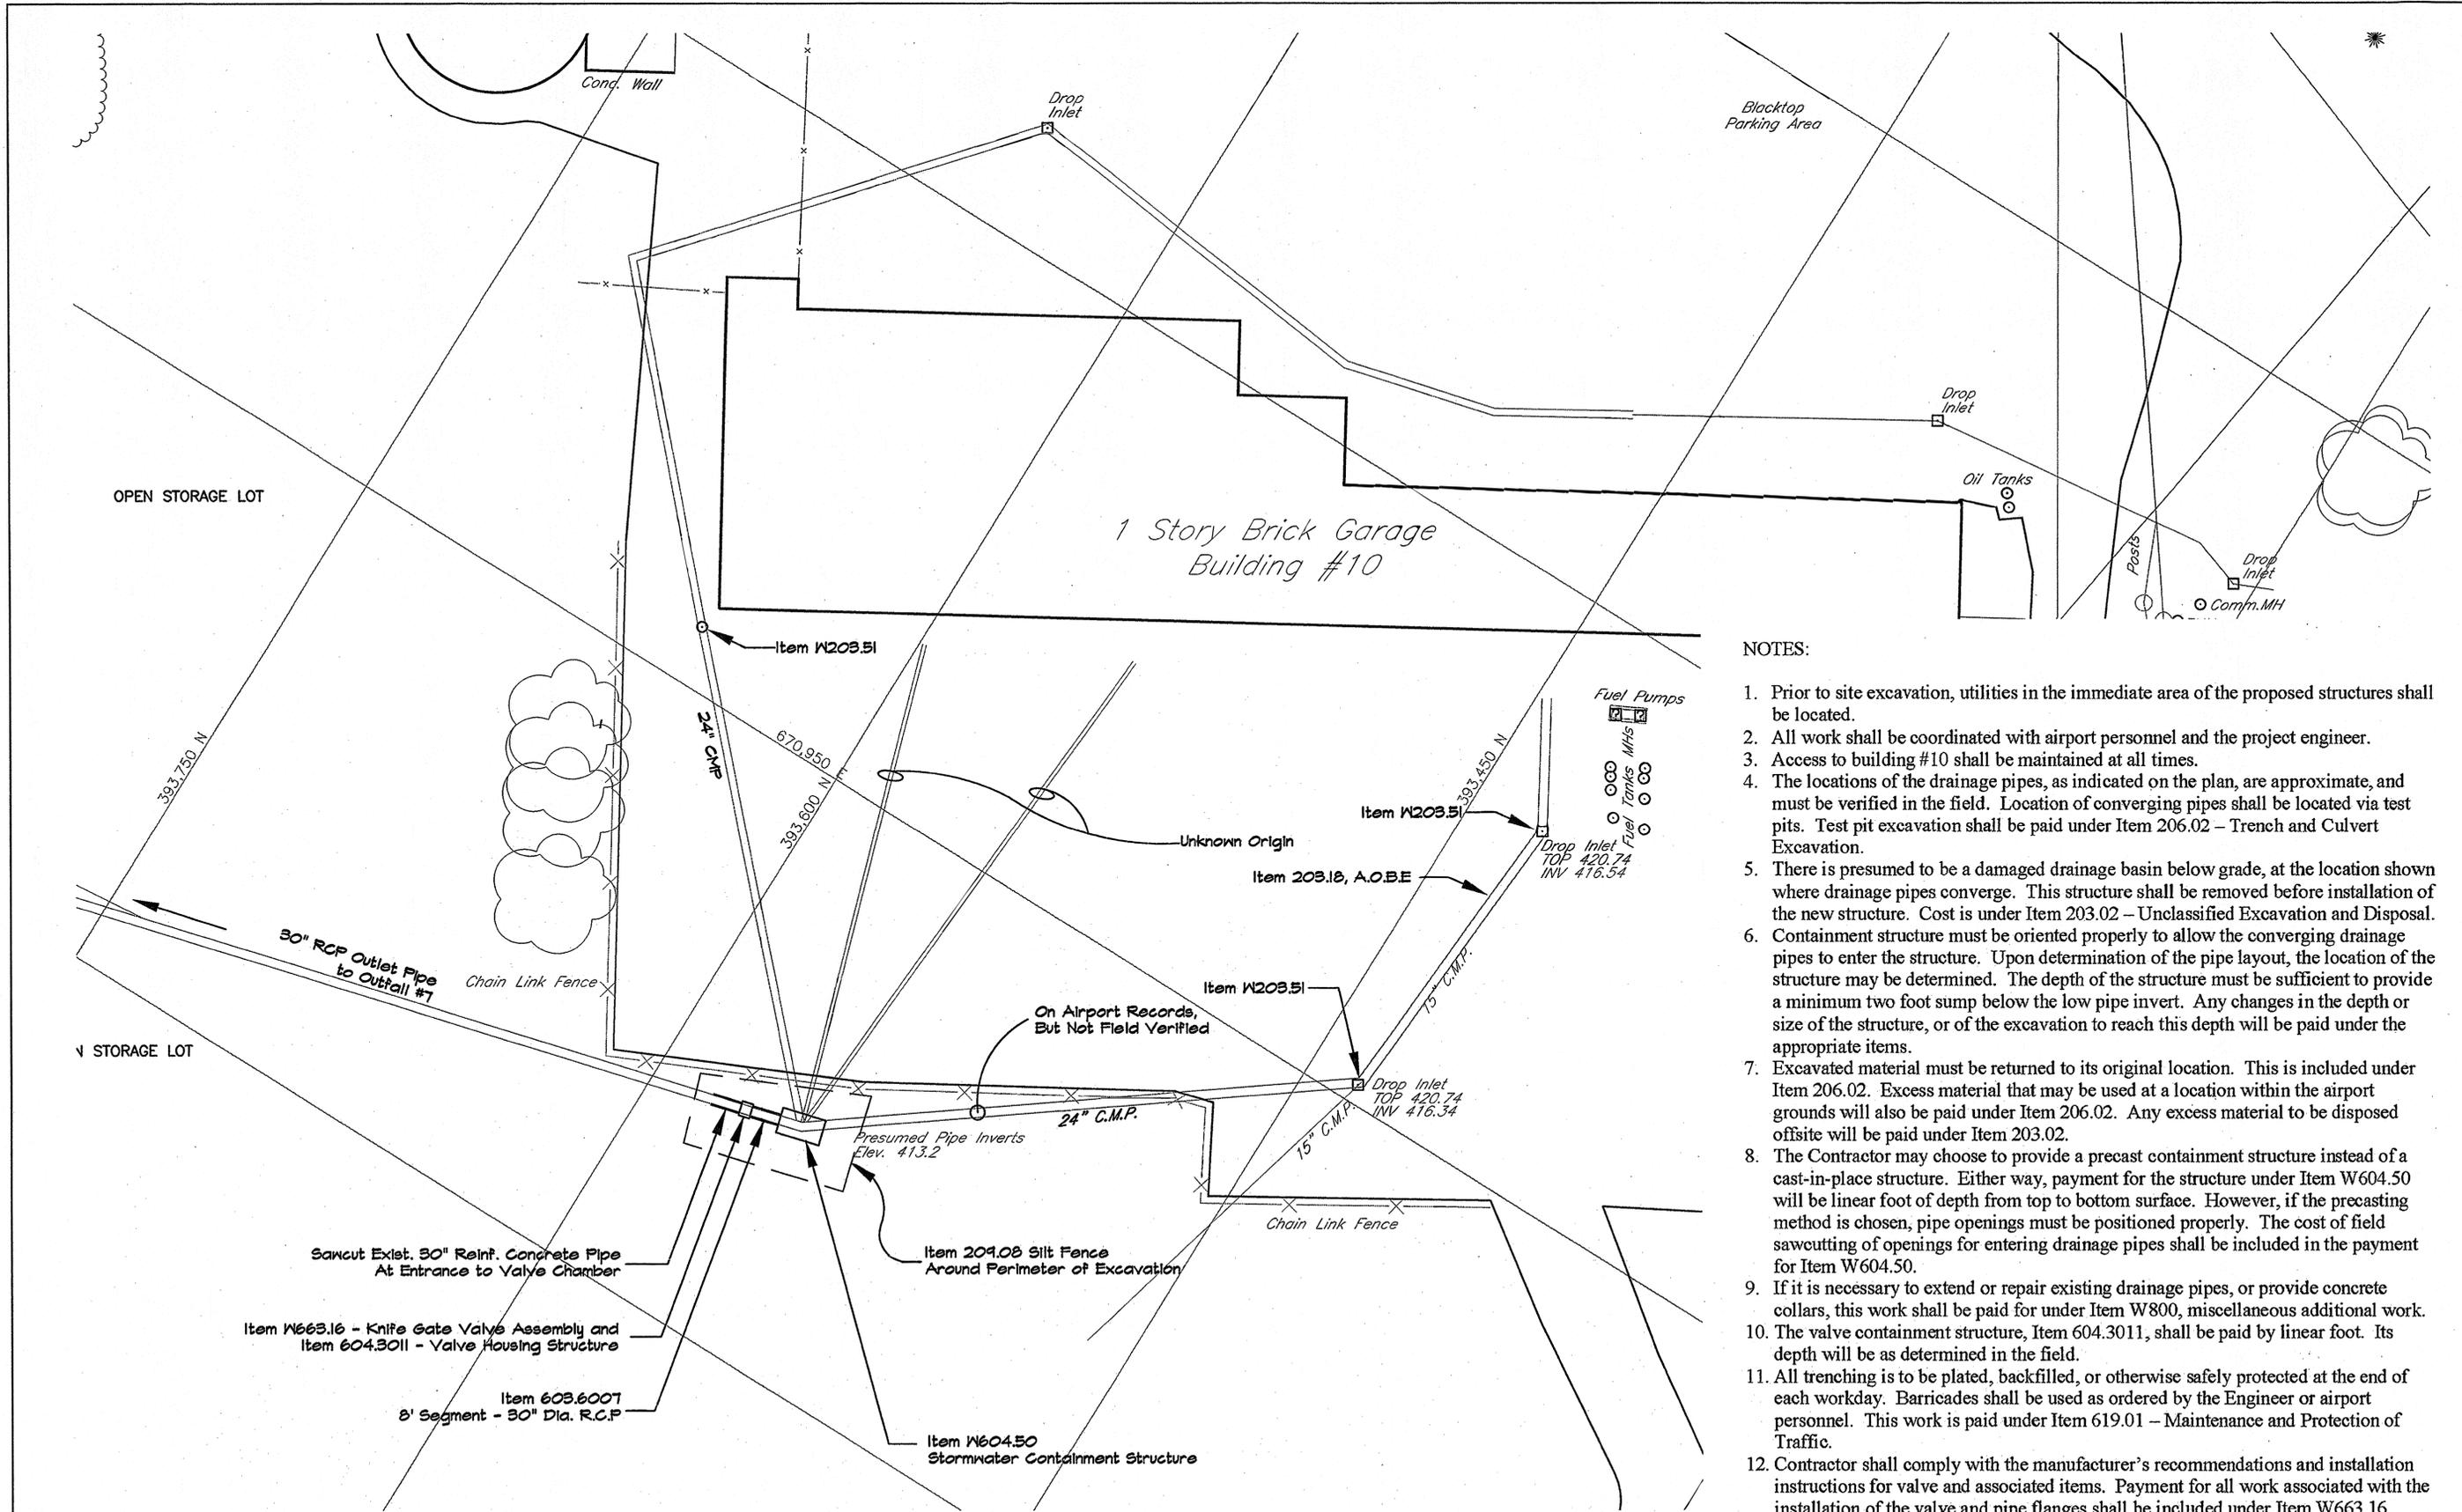

- NOTES:**
1. Prior to site excavation, utilities in the immediate area of the proposed structures shall be located.
  2. All work shall be coordinated with airport personnel and the project engineer.
  3. Access to building #10 shall be maintained at all times.
  4. The locations of the drainage pipes, as indicated on the plan, are approximate, and must be verified in the field. Location of converging pipes shall be located via test pits. Test pit excavation shall be paid under Item 206.02 - Trench and Culvert Excavation.
  5. There is presumed to be a damaged drainage basin below grade, at the location shown where drainage pipes converge. This structure shall be removed before installation of the new structure. Cost is under Item 203.02 - Unclassified Excavation and Disposal.
  6. Containment structure must be oriented properly to allow the converging drainage pipes to enter the structure. Upon determination of the pipe layout, the location of the structure may be determined. The depth of the structure must be sufficient to provide a minimum two foot sump below the low pipe invert. Any changes in the depth or size of the structure, or of the excavation to reach this depth will be paid under the appropriate items.
  7. Excavated material must be returned to its original location. This is included under Item 206.02. Excess material that may be used at a location within the airport grounds will also be paid under Item 206.02. Any excess material to be disposed offsite will be paid under Item 203.02.
  8. The Contractor may choose to provide a precast containment structure instead of a cast-in-place structure. Either way, payment for the structure under Item W604.50 will be linear foot of depth from top to bottom surface. However, if the precasting method is chosen, pipe openings must be positioned properly. The cost of field sawcutting of openings for entering drainage pipes shall be included in the payment for Item W604.50.
  9. If it is necessary to extend or repair existing drainage pipes, or provide concrete collars, this work shall be paid for under Item W800, miscellaneous additional work.
  10. The valve containment structure, Item 604.3011, shall be paid by linear foot. Its depth will be as determined in the field.
  11. All trenching is to be plated, backfilled, or otherwise safely protected at the end of each workday. Barricades shall be used as ordered by the Engineer or airport personnel. This work is paid under Item 619.01 - Maintenance and Protection of Traffic.
  12. Contractor shall comply with the manufacturer's recommendations and installation instructions for valve and associated items. Payment for all work associated with the installation of the valve and pipe flanges shall be included under Item W663.16.

IN CHARGE OF: Anthony Ventarola  
 MADE BY: A. Ventarola  
 CHECKED BY: \_\_\_\_\_

REVISION NUMBER	DATE	MADE BY	APP'D BY	REVISION

RECORD DRAWING CERTIFICATION			
<input type="checkbox"/> AS BUILT—CHANGES AS NOTED <input type="checkbox"/> AS BUILT—NO CHANGES			
CONTRACTOR		PROJECT COORDINATOR	
NAME _____	NAME _____	SIGNATURE _____	SIGNATURE _____
TITLE _____	TITLE _____	DATE _____	DATE _____

WESTCHESTER COUNTY, NEW YORK		PROJECT NUMBER	CONTRACT NUMBER
DEPARTMENT OF PUBLIC WORKS		---	03-235
DIVISION OF ENGINEERING		SHEET NO. 2 OF 3	
STORMWATER CONTAINMENT AT BLDG #10		SCALE: 1"=20'	
WESTCHESTER COUNTY AIRPORT		DATE: 12/9/03	
HARRISON, NORTH CASTLE AND RYE BROOK		DRAWING NO.	REV. NO.
SITE PLAN		48-16-G-50-0	0









## **APPENDIX B**

## HASP TRACKING SHEET

**Project Number: WESTC028**

List all tasks at the site for which a HASP is required. Add tasks as needed for project:

Task Code	Task Description	Date added to HASP	Date(s) Task Revised in HASP	Reason(s) for Revision
A	Groundwater and surface water sample collection	6/3/19	06/25/2020	Added COVID-19 response information
B	Monitoring well installation/HPT/EC/MIP	6/3/19	06/25/2020	Added COVID-19 response information
C	GPR/Video Survey	9/9/19	06/25/2020	Added COVID-19 response information
D	Storm Sewer Modification	9/9/19	06/25/2020	Added COVID-19 response information
E	PlumeStop/Application at OF-4	9/19/19	06/25/2020	Added COVID-19 response information

Add more tasks as needed

**Complete prior to each field effort:**

Dates of Field Effort	Task Code(s) Included in Effort	Task Descriptions	Contractor on site for work? (Y,N)	Hazard Level	Completed by:	Field Team Leader/Field Health and Safety Officer

Dates of Field Effort	Task Code(s) Included in Effort	Task Descriptions	Contractor on site for work? (Y,N)	Hazard Level	Completed by:	Field Team Leader/Field Health and Safety Officer

Add more as needed

# Site Health and Safety Plan<sup>1</sup>

## Section 1: General Information

<b>Site Name:</b>	Westchester County Airport	<b>Project Manager:</b>	David H. F. Luer
<b>Project Name:</b>	Westchester County Airport	<b>Site Emer Contact:</b>	David H. F. Luer
<b>Project Number:</b>	WESTC028	<b>Site Emer Contact #:</b>	973-229-8348
<b>Project Location:</b>	240 Airport Road, White Plains, NY 10604	<b>HASP Revision #:</b>	01
<b>Client Name:</b>	Westchester County	<b>HASP Approval Date:</b>	07/01/2020
<b>Site Contact:</b>	Peter Scherrer	<b>HASP Effective Date:</b>	07/01/2020
<b>Contact #:</b>	914-995-4856		

## Section 2: Emergency Contact Information

### Local Service Contact Numbers

<b>Ambulance:</b>	911	<b>Poison Control:</b>	800-462-6642
<b>Fire:</b>	911	<b>Fire (non-emergency):</b>	914 422-6360
<b>Police:</b>	911	<b>Police (non-emergency):</b>	914 422-6111

### Spill Response Information

DOT HazMat Info:	202-366-4488	CHEMTREC	800-424-9300
National Response Center Hotline:	800-424-8802	CMA Chemical Referral Center:	800-262-8200
State Spill Response Hotline Name	NYDEC Emergency Hotline	Emergency Response Contractor Name:	NA
State Spill Response Hotline number:	800-457-7362	Emergency Response Contractor Number:	NA

### First Environment Contact Information

Project Manager:	David H. F. Luer	FE Office Number:	973-334-0003
Cell Phone:	973-229-8348	Alternate FE Contact:	Phil Cicoello
Home Phone:	NA	Cell Phone:	908-346-3520
FE Medical Consultant:	Jeffrey Liva, M.D.	FE Human Resources Dir:	Scott Kymer
FE Medical Consultant #:	201-444-3060	Cell Phone:	973-632-6741

### Hospital Information (Do NOT attempt to transport anyone for anything other than a minor injury in which the individual is ambulatory. Call 911 for an ambulance instead.)

Name:	White Plains Hospital		
Address:	41 E. Post Road, White Plains, NY 10601		
Non-Emerg. Phone:	914-681-1155	Hours of Operation:	24/7
Verified by:	PC	Date:	6/3/2019

<sup>1</sup> Note: This Health and Safety Plan & COVID-19 1.1 Plan has been written for the use of First Environment, Inc., its employees, and the tasks to be performed by First Environment employees. The plan is written for specific trained personnel who are under medical surveillance. The plan is applicable for the specific work stated and is representative of conditions believed to exist at the time of its preparation. First Environment, Inc. claims no responsibility for its use by others.

# Section 3: Map to Hospital

This page reserved for a map and directions to the hospital.

18 min (8.7 miles)

via I-684 S

Fastest route, the usual traffic



## Westchester County Airport

240 Airport Rd, White Plains, NY 10604

- Take Airport Rd and New King St to NY-120 S in North Castle

5 min (1.7 mi)

- Take I-684 S, Westchester Ave and Maple Ave to Davis Ave in White Plains

13 min (5.9 mi)


- Drive to your destination

46 s (413 ft)

## White Plains Hospital

41 E Post Rd, White Plains, NY 10601

These directions are for planning purposes only. You may find that construction projects, traffic, weather, or other events may cause conditions to differ from the map results, and you should plan your route accordingly. You must obey all signs or notices regarding your route.

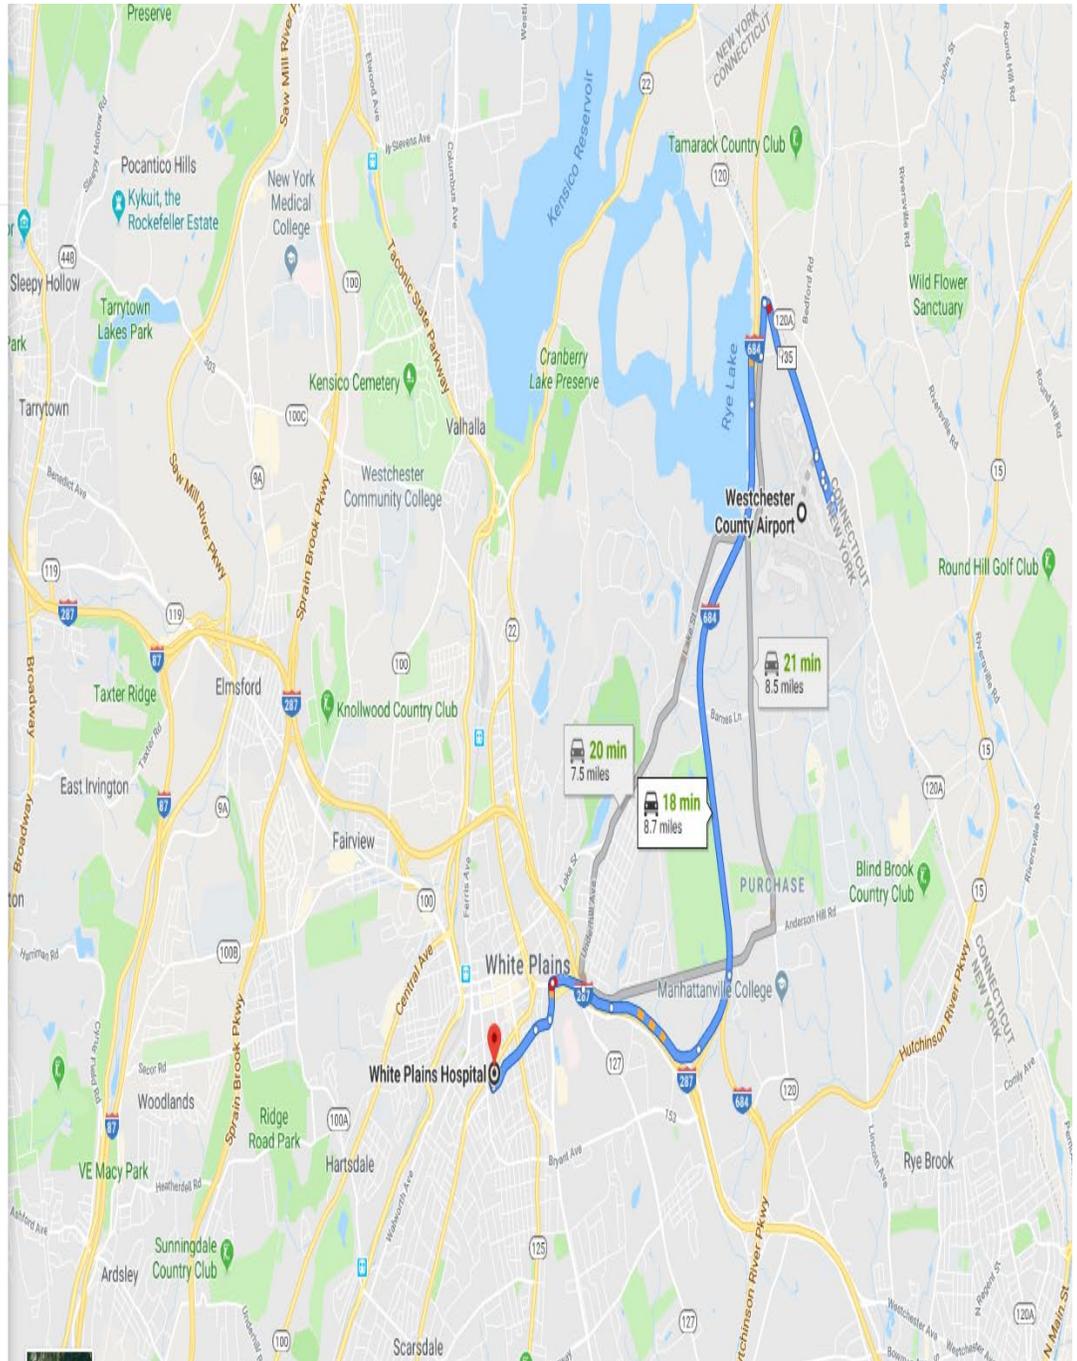

**In the event of an injury, incident or release, notify the PM, Senior Management, and HR as soon as safe to do so**

## Section 4: Site Description

### Field Effort Objectives (check those applicable)

Initial Assessment	<b>X</b>
Delineate contamination	<b>X</b>
Remediate contamination	<b>X</b>
Other (list below)	<b>X</b>
On-going investigation soil, sediment, groundwater & surface water sample collection	

### Site Characteristics (check all that apply)

First Entry	<b>X</b>	Hazardous (CERCLA/State Superfund)	
Previously Characterized	<b>X</b>	Hazardous (RCRA)	
Active	<b>X</b>	HAZWOPER	<b>X</b>
Inactive		Sanitary or C and D Landfill	
UST/LUST		Secure	
Manufacturing		Other (list below)	
Construction	<b>X</b>		

### Project History

First Environment, Inc. was retained by Westchester County Airport to investigate environmental contamination associated with historic operations at the site. Specifically, the investigation includes evaluation of emerging contaminants PFOS and PFAS at the site and in the immediate vicinity of adjacent off-site properties.

### Site Security and Control Measures

None by First Environment.

## Section 5: Known General Site Hazards

### Potential Chemical Hazards found at Site

Identify suspected compounds and levels if known. If levels are unknown, indicate unknown with **U**. If compounds are not present or not suspected to be present indicate with **NA**. If a class of compounds (in bold) is not present at the site, indicate NA for the class, it is then not necessary to fill in NA for compounds within the class.

Compounds	Known Concentration Ranges			Symptoms of Acute Exposure
	Soil (mg/kg)	W/GW (µg/L)	Indoor Air (ug/m <sup>3</sup> )	
<b>Nonchlorinated VOCs</b>				
Benzene				Irritation: Eyes, Skin, Respiratory System
2-Butanone (MEK)				
Ethylbenzene				
Hexone (MIBK)				
Methyl-t-butyl Ether (MTBE)				
Toluene		220		
Xylene				
Other(specify)				
<b>Chlorinated VOCs</b>				
Carbon tetrachloride				
Chlorobenzene				
1,2-Dichloroethane				
1,1 Dichloroethylene (1,1-DCE)		15		Irritation: Eyes, Skin, Throat; Dizziness; Headache; Nausea, Breathing Difficulty
Tetrachloroethylene (PCE)		19		Irritation; Eyes, Skin, Nose; Throat, Respiratory System; Nausea; Flush Face and Neck; Dizziness; Lack of Coordination; Headache; Drowsiness
1,1,1-Trichloroethane (TCA)		8		Irritation; Eyes, Skin; Headache; Weakness; Exhaustion
Trichloroethylene (TCE)		21		Irritation: Eyes, Skin; Headache
Vinyl Chloride		12		Weakness; Abdominal Pain
Other (specify)				
1,4-dioxane		32		
<b>Semi-Volatile Organics</b>				
Naphthalene				
PAHs				
Other (specify)				

Compounds	Known Concentration Ranges			Symptoms of Acute Exposure
	Soil (mg/kg)	W/GW (µg/L)	Indoor Air (ug/m <sup>3</sup> )	
<b>Petroleum Products</b>				
Gasoline				
Fuel Oil #2				
Fuel Oil #6				
Petroleum Distillates				
Other (specify)				
<b>Metals</b>				
Arsenic				
Cadmium				
Chromium				
Lead				
Mercury				
Other(specify)				
<b>PCBs</b>				
<b>Coal/MGP Tar</b>				
<b>Pesticides</b>				
<b>Asbestos</b>				
<b>Fiberglass</b>				
<b>Other (specify)</b>				
PFOA + PFOS		ND-53		

### Potential Physical Hazards Found at Site

Check all that apply. Indicate NA if they do not apply.

Unknown/Partially Characterized	<b>X</b>	Stored Energy/Energized Equipment	
Utility Lines	<b>X</b>	Confined Space*	
Electrical (other than utilities)	<b>X</b>	Oxygen Deficiency	
Fire		Slippery Surfaces/Tripping Hazards	<b>X</b>
Explosion*		Fall Potential	
Toxic Gases		Flying or Falling Material	
Ionizing Radiation*		Pinch Points	
Uneven Terrain		Poor Visibility/Inadequate Light	
Traffic	<b>X</b>	Water Hazards (specify)	<b>X (streams and creeks)</b>
Heavy Machinery/Moving Equipment	<b>X</b>	Air or steam emissions	

\* If this risk is identified, Senior Management must approve the HASP.

Crushing Hazard		Biological Waste (specify)	
Venomous Snakes	X	Wild Animals	
Poisonous Plants		Other (specify)	
Venomous Spiders			
Mosquitoes, Ticks or other Biting Insects	X	Aircraft taxing on and off runways; other airport equipment	X

**Restroom Facilities Location:** N/A

## Section 6: Work (Task) Description

If multiple tasks with different hazard profiles and risk controls are planned or as tasks are added, copy Sections 6, 7, and 8 and fill out for each task to identify task related hazards and appropriate controls.

**Task Code:**   A   (see cover page)

### Tasks to be performed by First Environment

**Describe Tasks:** Site Inspection/Collect Soil, sediment, groundwater & surface water sample collection

**Work Plan attached to HASP or provide separately?** Separately

**Describe roles and responsibilities personnel will perform:** Collect soil, sediment, groundwater & surface water samples

### Tasks to be performed by First Environment contractors<sup>2</sup>

<b>Task:</b>	Groundwater & surface water sample analysis	Subcontract Type (place x beneath type of agreement)	
		MSA	Individual
			X
<b>Contractor:</b>	York Labs	Effective Dates:	Effective Dates: 6/3/2019

<b>Task:</b>	Cascade Drilling	Subcontract Type (place x beneath type of agreement)	
		MSA	Individual
			x
<b>Contractor:</b>		Effective Dates;	Effective Dates:6/3/2019

Confirm all subcontracts covering tasks to be performed by subcontractors are in place, cover the work to be performed, and are for the time period of the work. Attach to back of HASP.

## Section 7: FE Work Hazard Assessment

**Task Code:**   A  

All chemicals to be brought on site for work	Approximate Amount	Form (liquid, solid, gas)
Alconox	4 oz.	Solid
Gasoline		
Dilute Hydrochloric Acid	<40 mL	Liquid
Methanol		

<sup>2</sup> Site characteristics to the best of First Environment's knowledge are included in this HASP. Per the subcontractor agreement, each subcontractor must assess hazards associated with their site work and have a site-specific health and safety plan covering their work on site.

Dilute Nitric Acid		
Dilute Sulfuric Acid		
Other (specify names)		

**Is there a potential for a chemical release beyond an incidental release?**

If yes, explain:

<b>Heavy equipment brought on site for work</b>	<b>Check all Applicable</b>
Drill rig	
Geoprobe	<b>X</b>
Excavator	
Backhoe	
Front End Loader	
Injection system	
Dump truck	
Generator	
Other (specify)	

If equipment at the facility is to be relied on, list the equipment and location:

<b>Equipment</b>	<b>Location</b>

<b>Hazards that apply to work to be performed</b>	<b>Check all applicable</b>	<b>Describe work activities to which it applies</b>
Unknown/Partially Characterized	<b>X</b>	Sample collection
Cold Exposure	<b>X</b>	Sample collection
Heat Stress	<b>X</b>	Sample collection
Explosion*		
Fire		
Toxic Gases		
Oxygen Deficiency*		
Confined Space*		
Ionizing Radiation*		
Chemical Dermal Exposure		
Chemical Inhalation		
Chemical Ingestion		
Dust/air emissions		
Air or steam emissions		
Biological Waste (specify)		
Extreme weather, heat	<b>X</b>	Sample collection; mapping
Stored Energy/Energized Equipment		
Heavy Machinery/Moving Equipment	<b>X</b>	Sample collection; mapping

\* If this hazard is present, Senior Management must approve the HASP.

Hazards that apply to work to be performed	Check all applicable	Describe work activities to which it applies
Pump Winch		
Slippery Surfaces	X	Sample collection; mapping
Fall Potential		
Pinch Points		
Flying or Falling Material/Equipment		
Heavy Lifting		
Crushing		
Repetitive Motion		
Venomous Snakes	X	Sample collection; mapping
Poisonous Plants		
Mosquitoes, Ticks or other Biting Insects	X	Sample collection; mapping
Venomous Spiders		
Wild Animals		
On or Near Water	X	Surface water sample collection
Other (specify)		
Aircraft taxing on and off runways; other airport equipment	X	Sample collection; mapping

**Overall Hazard Evaluation for Task**

High		Medium		Low	X	Unknown <sup>3</sup>	
Justification:	Sample collection						

**Section 8 Risk Control:**

(Must address all hazards identified under Sections 5 and 7, both those existing at the site and those associated with the work to be performed)

**Task Code: A**

**Public Utilities**

**Utility Markout**

Utility	Req.	Company Name	Telephone #
One Call		New York 811	811
Gas:		Con ED	800-752-6633
Electric:		Con Ed	800-752-6633
Water:		White Plains	914-422-1207
Sewer:		Mamaroneck	914-381-7825
Telephone:		Verizon	800-922-0204
Cable:		Verizon	800-922-0204

Markout Ticket Confirmation #	Date
NA	NA

Were non-public utility locations on site marked out or otherwise identified on facility? (Y/N) N

If no, identify activity modifications to address unidentified utilities, on-site utility lines, and other buried anomalies:

<sup>3</sup> If unknown, treat as high hazard until sufficient information has been developed

**Buddy System required? (Y/N) N**

If yes, describe circumstances:

If no, describe communication contingencies:

**If stored energy/energized equipment is present: N**

Is LO-TO required? (Y/N)

Specify equipment to be locked out/tagged out:

Follow the LO-TO procedure. List any differences or additions below:

Add photos of equipment subject to LO-TO to back of plan.

If LO-TO is not required, describe actions to ensure stored energy/energized equipment is managed during equipment set up, operation, and demobilization:

**Exclusion Zones:**

Will exclusion zones be used at the site? (Y/N) N

If yes, indicate zones on the site map.

**PPE**

Specify primary protective equipment to be worn during this task		Specify applicable activities
Level C		
Level D		
Level D Modified	<b>X</b>	No Tyvek; follow protocol in QAPP for sampling; sampling
If PPE beyond Level D is required, consult the Project Manager or Senior Management		

PPE Equipment	Primary	Contingency**	Trigger for Contingency Requirements**
<b><u>Respiratory</u></b>			
Respirator (full)			
Respirator (half)		X	
Cartridge type:			
P100			
Combo			
Other			
Dust Mask			
Other (specify)			
<b><u>Head and Eye</u></b>			
Safety Glasses	<b>X</b>		
Face Shield			
Goggles			
Hard Hat			
Other (specify)			
<b><u>Hearing</u></b>			
Ear plugs/muffs			
Dual			
<b><u>Feet</u></b>			
Overboots			
Safety-toed Workboots	<b>X</b>		
Other (specify)			
<b><u>Hands</u></b>			
Nitrile Gloves	<b>X</b>		

PPE Equipment	Primary	Contingency**	Trigger for Contingency Requirements**
Overgloves			
Other (specify)			
<b>Body</b>			
Tyvek Coverall			
Polycoated Tyvek			
Cold Weather Gear (Carhart)			
Rain Gear		X	No pfas
Safety Vest	X		
U.S. Coast Guard-approved life jacket or buoyant work vest			
Other (specify)			
<b>Other</b> (specify)			
COVID-19 related precautions	X		See Attachment A

**Other Equipment and Supplies:**

Lighting	
Potable Water	
Insect Repellent	
Fire Extinguisher (2.5 lb)	X
Fire Extinguisher (5 lb)	
Fire Extinguisher (10 lb)	
Eyewash Kit	
Spill Kit	X
First Aid Kit	X
Ring Buoys	
Lifesaving Skiff	
Portable Toilet	
Other (specify):	

**Operational Control Procedures and Work Instructions:** (Attach procedures to back of HASP)

**Decontamination Procedures:**

Follow the Field Decontamination Procedure. List any differences or additions below.

**Discharge Control Measures (Y/N) N**

If yes describe Discharge Control Measures:

**Waste Disposal Practices:**

Specify Waste Management Practices:

Waste Type	Sample	Containerize	Dispose of off Site	Return to Site	Dispose in FE Solid Waste
Drill Cuttings					
Purge Water	X	X			
Soil	X	X		X	
PPE and other field related waste					X
Other (Specify)					

**Additional waste handling instructions:**

**Other instructions:**

**General Safe Work Practices:**

To ensure the safety of First Environment personnel and the public at a site where fieldwork is being conducted, the Safe Work Practices listed below will be followed.

- Good housekeeping practices are to be maintained.
- A "buddy system" in which another worker is close enough to render immediate aid will be in effect when specified in the HASP.
- In the event of treacherous weather-related working conditions field tasks will be suspended until conditions improve or appropriate protection from the elements is provided.
- Smoking, eating, chewing gum or tobacco, or drinking are forbidden except in clean or designated area.
- Ignition of flammable liquids within or through improvised heating devices is forbidden.
- Contact with samples, excavated materials, or other contaminated materials must be minimized.
- Use of contact lenses is not advisable.
- If drilling equipment is involved, know where the 'kill switch' is.
- All electrical equipment used in outside locations, wet area or near water must be plugged into ground fault circuit interrupter protected outlets.
- Illumination - Work in the early morning or at dusk may require site lighting.

List any differences or additions below:

**Emergency Preparedness:** (Attach procedures to back of HASP)

**Field Emergency Response:**

Follow the Field Emergency Response Procedure. List any differences or additions below

**Spill Response:**

Follow the Field Spill Response Procedure. List any differences or additions below.

**Is a stand-by external emergency response contractor required? (Y/N) If yes, explain: N**

: Contractor:	Date Contacted:	Contacted by:

**Section 7: Work (Task) Description**

If multiple tasks with different hazard profiles and risk controls are planned or as tasks are added , copy Sections 6, 7, and 8 and fill out for each task to identify task related hazards and appropriate controls.

**Task Code:   B** (see cover page)

**Tasks to be performed by First Environment**

**Describe Tasks: Monitoring well installation and development**

**Work Plan attached to HASP or provide separately? Separately**

**Describe roles and responsibilities personnel will perform: Site inspection and Groundwater Sample Collection**

## Tasks to be performed by First Environment contractors<sup>4</sup>

<b>Task:</b>	Monitoring well installation and development	Subcontract Type (place x beneath type of agreement)	
		MSA	Individual
<b>Contractor:</b>	Summit Drilling	Effective Dates:	Effective Dates: 6/30/19

<b>Task:</b>	Geophysical/Video Storm Sewer/Modification	Subcontract Type (place x beneath type of agreement)	
		MSA	Individual
<b>Contractor:</b>	GPR One Call	Effective Dates;	Effective Dates:

<b>Task:</b>		Subcontract Type (place x beneath type of agreement)	
		MSA	Individual
<b>Contractor:</b>		Effective Dates;	Effective Dates:

Confirm all subcontracts covering tasks to be performed by subcontractors are in place, cover the work to be performed, and are for the time period of the work. Attach to back of HASP.

## Section 8: FE Work Hazard Assessment

**Task Code:   B**

All chemicals to be brought on site for work	Approximate Amount	Form (liquid, solid, gas)
Alconox	4 oz.	Solid
Gasoline		
Dilute Hydrochloric Acid		
Methanol		
Dilute Nitric Acid		
Dilute Sulfuric Acid		
Other (specify names)		

**Is there a potential for a chemical release beyond an incidental release? N**

If yes, explain:

Heavy equipment brought on site for work	Check all Applicable
Drill rig	X
Geoprobe	
Excavator	
Backhoe	
Front End Loader	

<sup>4</sup> Site characteristics to the best of First Environment's knowledge are included in this HASP. Per the subcontractor agreement, each subcontractor must assess hazards associated with their site work and have a site-specific health and safety plan covering their work on site.

Injection system	
Dump truck	
Generator	
Other (specify)	
Air compressor	X

If equipment at the facility is to be relied on, list the equipment and location:

Equipment	Location

Hazards that apply to work to be performed	Check all applicable	Describe work activities to which it applies
Unknown/Partially Characterized	X	Monitoring well installation
Cold Exposure		
Heat Stress	X	Monitoring well installation
Explosion*		
Fire		
Toxic Gases		
Oxygen Deficiency*		
Confined Space*		
Ionizing Radiation*		
Chemical Dermal Exposure		
Chemical Inhalation		
Chemical Ingestion		
Dust/air emissions		
Air or steam emissions		
Biological Waste (specify)		
Extreme weather, heat	X	Monitoring well installation
Stored Energy/Energized Equipment		
Heavy Machinery/Moving Equipment	X	Monitoring well installation
Pump Winch		
Slippery Surfaces	X	Monitoring well installation
Fall Potential		
Pinch Points		
Flying or Falling Material/Equipment		
Heavy Lifting		
Crushing		
Repetitive Motion		
Venomous Snakes		
Poisonous Plants		
Mosquitoes, Ticks or other Biting Insects	X	Monitoring well installation
Venomous Spiders		
Wild Animals		
On or Near Water		
Other (specify)		
Aircraft taxing on and off runways;	X	Monitoring well installation

\* If this hazard is present, Senior Management must approve the HASP.

Hazards that apply to work to be performed	Check all applicable	Describe work activities to which it applies
other airport equipment		

**Overall Hazard Evaluation for Task**

High		Medium		Low	X	Unknown <sup>5</sup>	
Justification:	Monitoring well installation/hpt/EC						

**Section 9 Risk Control:**

(Must address all hazards identified under Sections 5 and 7, both those existing at the site and those associated with the work to be performed)

**Task Code: B**

**Public Utilities**

**Utility Markout**

Utility	Req.	Company Name	Telephone #
One Call		New York 811	811
Gas:		Con ED	800-752-6633
Electric:		Con Ed	800-752-6633
Water:		White Plains	914-422-1207
Sewer:		Mamaroneck	914-381-7825
Telephone:		Verizon	800-922-0204
Cable:		Verizon	800-922-0204

Markout Ticket Confirmation #	Date
NA	NA

Were non-public utility locations on site marked out or otherwise identified on facility? (Y/N) N

If no, identify activity modifications to address unidentified utilities, on-site utility lines, and other buried anomalies: Replacement monitoring well to be installed adjacent to existing monitoring well.

**Buddy System required? (Y/N) N**

If yes, describe circumstances:

If no, describe communication contingencies:

**If stored energy/energized equipment is present: N**

Is LO-TO required? (Y/N)

Specify equipment to be locked out/tagged out:

Follow the LO-TO procedure. List any differences or additions below:

Add photos of equipment subject to LO-TO to back of plan.

If LO-TO is not required, describe actions to ensure stored energy/energized equipment is managed during equipment set up, operation, and demobilization:

**Exclusion Zones:**

Will exclusion zones be used at the site? (Y/N) N

If yes, indicate zones on the site map.

<sup>5</sup> If unknown, treat as high hazard until sufficient information has been developed

**PPE**

Specify primary protective equipment to be worn during this task	Specify applicable activities	
Level C		
Level D		
Level D Modified	X	Monitoring well installation
If PPE beyond Level D is required, consult the Project Manager or Senior Management		

PPE Equipment	Primary	Contingency**	Trigger for Contingency Requirements**
<b>Respiratory</b>			
Respirator (full)			
Respirator (half)		X	
Cartridge type:			
P100			
Combo			
Other			
Dust Mask			
Other (specify)			
<b>Head and Eye</b>			
Safety Glasses	X		
Face Shield			
Goggles			
Hard Hat	X		
Other (specify)			
<b>Hearing</b>			
Ear plugs/muffs	X		
Dual			
<b>Feet</b>			
Overboots			
Safety-toed Workboots	X		
Other (specify)			
<b>Hands</b>			
Nitrile Gloves	X		
Overgloves			
Other (specify)			
<b>Body</b>			
Tyvek Coverall			
Polycoated Tyvek			
Cold Weather Gear (Carhart)			
Rain Gear		X	
Safety Vest	X		
U.S. Coast Guard-approved life jacket or buoyant work vest			
Other (specify)			
<b>Other (specify)</b>			
COVID-19 related precautions	X		See Attachment A

**Other Equipment and Supplies:**

Lighting	
Potable Water	
Insect Repellent	
Fire Extinguisher (2.5 lb)	X
Fire Extinguisher (5 lb)	
Fire Extinguisher (10 lb)	
Eyewash Kit	
Spill Kit	X
First Aid Kit	X
Ring Buoys	
Lifesaving Skiff	
Portable Toilet	
Other (specify):	

**Operational Control Procedures and Work Instructions:** (Attach procedures to back of HASP)

**Decontamination Procedures:**

Follow the Field Decontamination Procedure. List any differences or additions below.

**Discharge Control Measures (Y/N) N**

If yes describe Discharge Control Measures:

**Waste Disposal Practices:**

Specify Waste Management Practices:

Waste Type	Sample	Containerize	Dispose of off Site	Return to Site	Dispose in FE Solid Waste
Drill Cuttings					
Purge Water	X	X			
Soil	X	X		X	
PPE and other field related waste					X
Other (Specify)					

**Additional waste handling instructions:**

**Other instructions:**

**General Safe Work Practices:**

To ensure the safety of First Environment personnel and the public at a site where fieldwork is being conducted, the Safe Work Practices listed below will be followed.

- Good housekeeping practices are to be maintained.
- A "buddy system" in which another worker is close enough to render immediate aid will be in effect when specified in the HASP.
- In the event of treacherous weather-related working conditions field tasks will be suspended until conditions improve or appropriate protection from the elements is provided.
- Smoking, eating, chewing gum or tobacco, or drinking are forbidden except in clean or designated area.
- Ignition of flammable liquids within or through improvised heating devices is forbidden.
- Contact with samples, excavated materials, or other contaminated materials must be minimized.
- Use of contact lenses is not advisable.
- If drilling equipment is involved, know where the 'kill switch' is.

- All electrical equipment used in outside locations, wet area or near water must be plugged into ground fault circuit interrupter protected outlets.
- Illumination - Work in the early morning or at dusk may require site lighting.

List any differences or additions below:

**Emergency Preparedness:** (Attach procedures to back of HASP)

**Field Emergency Response:**

Follow the Field Emergency Response Procedure. List any differences or additions below

**Spill Response:**

Follow the Field Spill Response Procedure. List any differences or additions below.

**Is a stand-by external emergency response contractor required? (Y/N) If yes, explain: N**

: Contractor:	Date Contacted:	Contacted by:

This page reserved for a site map showing work locations, staging areas, exclusion zones as appropriate, emergency response equipment locations as appropriate, and the evacuation route and muster point.

**Section 6: Work (Task) Description**

If multiple tasks with different hazard profiles and risk controls are planned or as tasks are added , copy Sections 6, 7, and 8 and fill out for each task to identify task related hazards and appropriate controls.

**Task Code:   C** (see cover page)

**Tasks to be performed by First Environment**

**Describe Tasks: Inpect Storm Sewers via downhole video camera.**

**Work Plan attached to HASP or provide separately? Separately**

**Describe roles and responsibilities personnel will perform: Oversight of subcontractor**

**Tasks to be performed by First Environment contractors<sup>6</sup>**

	GPR/Video	Subcontract Type (place x beneath type of agreement)	
		MSA	Individual
<b>Task:</b>			x
	GPR One Call	Effective Dates;	Effective Dates: 9/09/19
<b>Contractor:</b>			

Confirm all subcontracts covering tasks to be performed by subcontractors are in place, cover the work to be performed, and are for the time period of the work. Attach to back of HASP.

**Section 7: FE Work Hazard Assessment**

**Task Code:   C**

<sup>6</sup> Site characteristics to the best of First Environment’s knowledge are included in this HASP. Per the subcontractor agreement, each subcontractor must assess hazards associated with their site work and have a site- specific health and safety plan covering their work on site.

All chemicals to be brought on site for work	Approximate Amount	Form (liquid, solid, gas)
Alconox	4 oz.	Solid
Gasoline		
Dilute Hydrochloric Acid	<40 mL	Liquid
Methanol		
Dilute Nitric Acid		
Dilute Sulfuric Acid		
Other (specify names)		

**Is there a potential for a chemical release beyond an incidental release?**

If yes, explain:

Heavy equipment brought on site for work	Check all Applicable
Drill rig	
Geoprobe	
Excavator	
Backhoe	
Front End Loader	
Injection system	
Dump truck	
Generator	
Other (specify)	

If equipment at the facility is to be relied on, list the equipment and location:

Equipment	Location
Forklift	Air side – Will coordinate with Emily

Hazards that apply to work to be performed	Check all applicable	Describe work activities to which it applies
Unknown/Partially Characterized	X	Video inspection
Cold Exposure	X	Video inspection
Heat Stress	X	Video inspection
Explosion*		
Fire		
Toxic Gases		
Oxygen Deficiency*		
Confined Space*		
Ionizing Radiation*		
Chemical Dermal Exposure		
Chemical Inhalation		
Chemical Ingestion		
Dust/air emissions		
Air or steam emissions		

\* If this hazard is present, Senior Management must approve the HASP.

Hazards that apply to work to be performed	Check all applicable	Describe work activities to which it applies
Biological Waste (specify)		
Extreme weather, heat	X	Video inspection
Stored Energy/Energized Equipment		
Heavy Machinery/Moving Equipment	X	Video inspection
Pump Winch		
Slippery Surfaces	X	Video inspection
Fall Potential	X	Video inspection
Pinch Points		
Flying or Falling Material/Equipment	X	Video inspection
Heavy Lifting		
Crushing		
Repetitive Motion		
Venomous Snakes	X	Video inspection
Poisonous Plants		
Mosquitoes, Ticks or other Biting Insects	X	Video inspection
Venomous Spiders		
Wild Animals		
On or Near Water	X	Video inspection
Other (specify)		
Aircraft taxing on and off runways; other airport equipment	X	Video inspection

**Overall Hazard Evaluation for Task**

High		Medium		Low	X	Unknown <sup>7</sup>	
Justification:	Video inspection						

**Section 8 Risk Control:**

(Must address all hazards identified under Sections 5 and 7, both those existing at the site and those associated with the work to be performed)

**Task Code: C**

**Public Utilities**

**Non-intrusive work for this task- No utility call out needed.**

Utility	Req.	Company Name	Telephone #
One Call		New York 811	811
Gas:		Con ED	800-752-6633
Electric:		Con Ed	800-752-6633
Water:		White Plains	914-422-1207
Sewer:		Mamaroneck	914-381-7825
Telephone:		Verizon	800-922-0204
Cable:		Verizon	800-922-0204

Markout Ticket Confirmation #	Date
NA	NA

<sup>7</sup> If unknown, treat as high hazard until sufficient information has been developed

Were non-public utility locations on site marked out or otherwise identified on facility? (Y/N) N

If no, identify activity modifications to address unidentified utilities, on-site utility lines, and other buried anomalies:

**Buddy System required?** (Y/N) N

If yes, describe circumstances:

If no, describe communication contingencies:

**If stored energy/energized equipment is present: N**

Is LO-TO required? (Y/N)

Specify equipment to be locked out/tagged out:

Follow the LO-TO procedure. List any differences or additions below:

Add photos of equipment subject to LO-TO to back of plan.

If LO-TO is not required, describe actions to ensure stored energy/energized equipment is managed during equipment set up, operation, and demobilization:

**Exclusion Zones:**

Will exclusion zones be used at the site? (Y/N) N

If yes, indicate zones on the site map.

**PPE**

Specify primary protective equipment to be worn during this task		Specify applicable activities
Level C		
Level D		
Level D Modified	X	No Tyvek; follow protocol in QAPP for sampling; sampling
If PPE beyond Level D is required, consult the Project Manager or Senior Management		

PPE Equipment	Primary	Contingency**	Trigger for Contingency Requirements**
<b><u>Respiratory</u></b>			
Respirator (full)			
Respirator (half)		X	
Cartridge type:			
P100			
Combo			
Other			
Dust Mask			
Other (specify)			
<b><u>Head and Eye</u></b>			
Safety Glasses	X		
Face Shield			
Goggles			
Hard Hat			
Other (specify)			
<b><u>Hearing</u></b>			
Ear plugs/muffs			
Dual			
<b><u>Feet</u></b>			
Overboots			
Safety-toed Workboots	X		

PPE Equipment	Primary	Contingency**	Trigger for Contingency Requirements**
Other (specify)			
<b>Hands</b>			
Nitrile Gloves	X		
Overgloves			
Other (specify)			
<b>Body</b>			
Tyvek Coverall			
Polycoated Tyvek			
Cold Weather Gear (Carhart)			
Rain Gear		X	Bad weather
Safety Vest	X		
U.S. Coast Guard-approved life jacket or buoyant work vest			
Other (specify)			
<b>Other</b> (specify)			
COVID-19 related precautions	X		See Attachment A

**Other Equipment and Supplies:**

Lighting	
Potable Water	
Insect Repellent	
Fire Extinguisher (2.5 lb)	X
Fire Extinguisher (5 lb)	
Fire Extinguisher (10 lb)	
Eyewash Kit	
Spill Kit	X
First Aid Kit	X
Ring Buoys	
Lifesaving Skiff	
Portable Toilet	
Other (specify):	

**Operational Control Procedures and Work Instructions:** (Attach procedures to back of HASP)

**Decontamination Procedures:**

Follow the Field Decontamination Procedure. List any differences or additions below.

**Discharge Control Measures (Y/N) N**

If yes describe Discharge Control Measures:

**Waste Disposal Practices:**

Specify Waste Management Practices:

Waste Type	Sample	Containerize	Dispose of off Site	Return to Site	Dispose in FE Solid Waste
Drill Cuttings					
Purge Water					
Soil					

Waste Type	Sample	Containerize	Dispose of off Site	Return to Site	Dispose in FE Solid Waste
PPE and other field related waste					X
Other (Specify)					

**Additional waste handling instructions:**

**Other instructions:**

**General Safe Work Practices:**

To ensure the safety of First Environment personnel and the public at a site where fieldwork is being conducted, the Safe Work Practices listed below will be followed.

- Good housekeeping practices are to be maintained.
- A "buddy system" in which another worker is close enough to render immediate aid will be in effect when specified in the HASP.
- In the event of treacherous weather-related working conditions field tasks will be suspended until conditions improve or appropriate protection from the elements is provided.
- Smoking, eating, chewing gum or tobacco, or drinking are forbidden except in clean or designated area.
- Ignition of flammable liquids within or through improvised heating devices is forbidden.
- Contact with samples, excavated materials, or other contaminated materials must be minimized.
- Use of contact lenses is not advisable.
- If drilling equipment is involved, know where the 'kill switch' is.
- All electrical equipment used in outside locations, wet area or near water must be plugged into ground fault circuit interrupter protected outlets.
- Illumination - Work in the early morning or at dusk may require site lighting.

List any differences or additions below:

**Emergency Preparedness:** (Attach procedures to back of HASP)

**Field Emergency Response:**

Follow the Field Emergency Response Procedure. List any differences or additions below

**Spill Response:**

Follow the Field Spill Response Procedure. List any differences or additions below.

**Is a stand-by external emergency response contractor required? (Y/N) If yes, explain: N**

: Contractor:	Date Contacted:	Contacted by:

**Section 6: Work (Task) Description**

If multiple tasks with different hazard profiles and risk controls are planned or as tasks are added , copy Sections 6, 7, and 8 and fill out for each task to identify task related hazards and appropriate controls.

**Task Code:   D** (see cover page)

**Tasks to be performed by First Environment**

**Describe Tasks: Modify Storm Sewer**

**Work Plan attached to HASP or provide separately? Separately**

Describe roles and responsibilities personnel will perform: Oversight of operations, direction of excavation and modifications

**Tasks to be performed by First Environment contractors<sup>8</sup>**

<b>Task:</b>	Excavation and modification of storm sewers	Subcontract Type (place x beneath type of agreement)	
		MSA	Individual
<b>Contractor:</b>	Spiniello	Effective Dates;	Effective Dates:6/3/2019

Confirm all subcontracts covering tasks to be performed by subcontractors are in place, cover the work to be performed, and are for the time period of the work. Attach to back of HASP.

**Section 7: FE Work Hazard Assessment**

**Task Code:   D**

All chemicals to be brought on site for work	Approximate Amount	Form (liquid, solid, gas)
Alconox	4 oz.	Solid
Gasoline		
Dilute Hydrochloric Acid	<40 mL	Liquid
Methanol		
Dilute Nitric Acid		
Dilute Sulfuric Acid		
Other (specify names)		

**Is there a potential for a chemical release beyond an incidental release?**  
If yes, explain:

Heavy equipment brought on site for work	Check all Applicable
Drill rig	
Geoprobe	
Excavator	
Backhoe	<b>X</b>
Front End Loader	
Injection system	
Dump truck	<b>X</b>
Generator	
Other (specify)	

<sup>8</sup> Site characteristics to the best of First Environment’s knowledge are included in this HASP. Per the subcontractor agreement, each subcontractor must assess hazards associated with their site work and have a site- specific health and safety plan covering their work on site.

If equipment at the facility is to be relied on, list the equipment and location:

Equipment	Location

Hazards that apply to work to be performed	Check all applicable	Describe work activities to which it applies
Unknown/Partially Characterized	X	Sewer Modification
Cold Exposure	X	Sewer Modification
Heat Stress	X	Sewer Modification
Explosion*		
Fire		
Toxic Gases		
Oxygen Deficiency*		
Confined Space*		
Ionizing Radiation*		
Chemical Dermal Exposure		
Chemical Inhalation		
Chemical Ingestion		
Dust/air emissions	X	Sewer Modification
Air or steam emissions		
Biological Waste (specify)		
Extreme weather, heat	X	Sewer Modification
Stored Energy/Energized Equipment		
Heavy Machinery/Moving Equipment	X	Sewer Modification
Pump Winch		
Slippery Surfaces	X	Sewer Modification
Fall Potential		
Pinch Points		
Flying or Falling Material/Equipment	X	Sewer Modification
Heavy Lifting		
Crushing	X	Sewer Modification
Repetitive Motion		
Venomous Snakes	X	Sewer Modification
Poisonous Plants		
Mosquitoes, Ticks or other Biting Insects	X	Sewer Modification
Venomous Spiders		
Wild Animals		
On or Near Water	X	Sewer Modification
Other (specify)		
Aircraft taxing on and off runways; other airport equipment	X	Sewer Modification

**Overall Hazard Evaluation for Task**

<b>High</b>		<b>Medium</b>		<b>Low</b>	X	<b>Unknown<sup>9</sup></b>	
<b>Justification:</b>	Sample collection						

\* If this hazard is present, Senior Management must approve the HASP.

<sup>9</sup> If unknown, treat as high hazard until sufficient information has been developed

## Section 8 Risk Control:

(Must address all hazards identified under Sections 5 and 7, both those existing at the site and those associated with the work to be performed)

**Task Code: D**

### Public Utilities

#### Utility Markout

Utility	Req.	Company Name	Telephone #
One Call		New York 811	811
Gas:		Con ED	800-752-6633
Electric:		Con Ed	800-752-6633
Water:		White Plains	914-422-1207
Sewer:		Mamaroneck	914-381-7825
Telephone:		Verizon	800-922-0204
Cable:		Verizon	800-922-0204

Markout Ticket Confirmation #	Date
NA	NA

Were non-public utility locations on site marked out or otherwise identified on facility? (Y/N) N

If no, identify activity modifications to address unidentified utilities, on-site utility lines, and other buried anomalies:

In areas needing modification, GPR as well as referencing site as built will mitigate risk of buried utilities during excavation activities.

**Buddy System required? (Y/N) N**

If yes, describe circumstances:

If no, describe communication contingencies:

**If stored energy/energized equipment is present: N**

Is LO-TO required? (Y/N)

Specify equipment to be locked out/tagged out:

Follow the LO-TO procedure. List any differences or additions below:

Add photos of equipment subject to LO-TO to back of plan.

If LO-TO is not required, describe actions to ensure stored energy/energized equipment is managed during equipment set up, operation, and demobilization:

**Exclusion Zones:**

Will exclusion zones be used at the site? (Y/N) N

If yes, indicate zones on the site map.

### PPE

Specify primary protective equipment to be worn during this task		Specify applicable activities
Level C		
Level D		
Level D Modified	X	No Tyvek; follow protocol in QAPP for sampling; sampling
If PPE beyond Level D is required, consult the Project Manager or Senior Management		

PPE Equipment	Primary	Contingency**	Trigger for Contingency Requirements**

<b>PPE Equipment</b>	<b>Primary</b>	<b>Contingency**</b>	<b>Trigger for Contingency Requirements**</b>
<b>Respiratory</b>			
Respirator (full)			
Respirator (half)		X	
Cartridge type:			
P100			
Combo			
Other			
Dust Mask			
Other (specify)			
<b>Head and Eye</b>			
Safety Glasses	X		
Face Shield			
Goggles			
Hard Hat	X		
Other (specify)			
<b>Hearing</b>			
Ear plugs/muffs	X		
Dual			
<b>Feet</b>			
Overboots			
Safety-toed Workboots	X		
Other (specify)			
<b>Hands</b>			
Nitrile Gloves	X		
Overgloves			
Other (specify)			
<b>Body</b>			
Tyvek Coverall			
Polycoated Tyvek			
Cold Weather Gear (Carhart)			
Rain Gear		X	No PFAS containing clothing to be used
Safety Vest	X		
U.S. Coast Guard-approved life jacket or buoyant work vest			
Other (specify)			
<b>Other (specify)</b>			
COVID-19 related precautions	X		See Attachment A

**Other Equipment and Supplies:**

Lighting	
Potable Water	
Insect Repellent	
Fire Extinguisher (2.5 lb)	X
Fire Extinguisher (5 lb)	
Fire Extinguisher (10 lb)	
Eyewash Kit	

Spill Kit	X
First Aid Kit	X
Ring Buoys	
Lifesaving Skiff	
Portable Toilet	
Other (specify):	

**Operational Control Procedures and Work Instructions:** (Attach procedures to back of HASP)

**Decontamination Procedures:**

Follow the Field Decontamination Procedure. List any differences or additions below.

**Discharge Control Measures (Y/N) N**

If yes describe Discharge Control Measures:

**Waste Disposal Practices:**

Specify Waste Management Practices:

Waste Type	Sample	Containerize	Dispose of off Site	Return to Site	Dispose in FE Solid Waste
Drill Cuttings					
Purge Water					
Soil		X		X	
PPE and other field related waste					X
Other (Specify)					

**Additional waste handling instructions:**

**Other instructions:**

**General Safe Work Practices:**

To ensure the safety of First Environment personnel and the public at a site where fieldwork is being conducted, the Safe Work Practices listed below will be followed.

- Good housekeeping practices are to be maintained.
- A "buddy system" in which another worker is close enough to render immediate aid will be in effect when specified in the HASP.
- In the event of treacherous weather-related working conditions field tasks will be suspended until conditions improve or appropriate protection from the elements is provided.
- Smoking, eating, chewing gum or tobacco, or drinking are forbidden except in clean or designated area.
- Ignition of flammable liquids within or through improvised heating devices is forbidden.
- Contact with samples, excavated materials, or other contaminated materials must be minimized.
- Use of contact lenses is not advisable.
- If drilling equipment is involved, know where the 'kill switch' is.
- All electrical equipment used in outside locations, wet area or near water must be plugged into ground fault circuit interrupter protected outlets.
- Illumination - Work in the early morning or at dusk may require site lighting.

List any differences or additions below:

**Emergency Preparedness:** (Attach procedures to back of HASP)

**Field Emergency Response:**

Follow the Field Emergency Response Procedure. List any differences or additions below

**Spill Response:**

Follow the Field Spill Response Procedure. List any differences or additions below.

**Is a stand-by external emergency response contractor required? (Y/N) If yes, explain: N**

: Contractor:	Date Contacted:	Contacted by:

**Section 6: Work (Task) Description**

If multiple tasks with different hazard profiles and risk controls are planned or as tasks are added , copy Sections 6, 7, and 8 and fill out for each task to identify task related hazards and appropriate controls.

**Task Code:   E   (see cover page)**

**Tasks to be performed by First Environment**

**Describe Tasks: Site Inspection/Collect Soil, sediment, groundwater & surface water sample collection**

**Work Plan attached to HASP or provide separately? Separately**

**Describe roles and responsibilities personnel will perform: Collect soil, sediment, groundwater & surface water samples**

**Tasks to be performed by First Environment contractors<sup>10</sup>**

<b>Task:</b>	PlumeStop/Application at OF-4	Subcontract Type (place x beneath type of agreement)	
		MSA	Individual
			<b>X</b>
<b>Contractor:</b>	Spinello	Effective Dates:	Effective Dates: 6/3/2019

<b>Task:</b>	Subsurface injections of PlumeStop	Subcontract Type (place x beneath type of agreement)	
		MSA	Individual
			x
<b>Contractor:</b>		Effective Dates;	Effective Dates:6/3/2019

Confirm all subcontracts covering tasks to be performed by subcontractors are in place, cover the work to be performed, and are for the time period of the work. Attach to back of HASP.

**Section 7: FE Work Hazard Assessment**

**Task Code:   E**

All chemicals to be brought on site for work	Approximate Amount	Form (liquid, solid, gas)
Alconox	4 oz.	Solid
Gasoline		
Dilute Hydrochloric Acid	<40 mL	Liquid
Methanol		

<sup>10</sup> Site characteristics to the best of First Environment’s knowledge are included in this HASP. Per the subcontractor agreement, each subcontractor must assess hazards associated with their site work and have a site- specific health and safety plan covering their work on site.

Dilute Nitric Acid		
Dilute Sulfuric Acid		
Other (specify names)		

**Is there a potential for a chemical release beyond an incidental release?**

If yes, explain:

<b>Heavy equipment brought on site for work</b>	<b>Check all Applicable</b>
Drill rig	
Geoprobe	
Excavator	
Backhoe	
Front End Loader	
Injection system	X
Dump truck	
Generator	X
Other (specify)	

If equipment at the facility is to be relied on, list the equipment and location:

<b>Equipment</b>	<b>Location</b>

<b>Hazards that apply to work to be performed</b>	<b>Check all applicable</b>	<b>Describe work activities to which it applies</b>
Unknown/Partially Characterized	X	PlumeStop/Application
Cold Exposure	X	PlumeStop/Application
Heat Stress	X	PlumeStop/Application
Explosion*		
Fire		
Toxic Gases		
Oxygen Deficiency*		
Confined Space*		
Ionizing Radiation*		
Chemical Dermal Exposure		
Chemical Inhalation		
Chemical Ingestion		
Dust/air emissions		
Air or steam emissions		
Biological Waste (specify)		
Extreme weather, heat	X	PlumeStop/Application
Stored Energy/Energized Equipment		
Heavy Machinery/Moving Equipment	X	PlumeStop/Application
Pump Winch		

\* If this hazard is present, Senior Management must approve the HASP.

Hazards that apply to work to be performed	Check all applicable	Describe work activities to which it applies
Slippery Surfaces	X	PlumeStop/Application
Fall Potential		
Pinch Points		
Flying or Falling Material/Equipment	X	PlumeStop/Application
Heavy Lifting		
Crushing		
Repetitive Motion		
Venomous Snakes	X	PlumeStop/Application
Poisonous Plants	X	PlumeStop/Application
Mosquitoes, Ticks or other Biting Insects	X	PlumeStop/Application
Venomous Spiders		
Wild Animals		
On or Near Water	X	PlumeStop/Application
Other (specify)		
Aircraft taxing on and off runways; other airport equipment	X	PlumeStop/Application

**Overall Hazard Evaluation for Task**

High		Medium		Low	X	Unknown <sup>11</sup>	
Justification:		PlumeStop/Application					

**Section 8 Risk Control:**

(Must address all hazards identified under Sections 5 and 7, both those existing at the site and those associated with the work to be performed)

**Task Code: E**

**Public Utilities**

**Utility Markout**

Utility	Req.	Company Name	Telephone #
One Call		New York 811	811
Gas:		Con ED	800-752-6633
Electric:		Con Ed	800-752-6633
Water:		White Plains	914-422-1207
Sewer:		Mamaroneck	914-381-7825
Telephone:		Verizon	800-922-0204
Cable:		Verizon	800-922-0204

Markout Ticket Confirmation #

Date

Markout Ticket Confirmation #	Date
NA	NA

Were non-public utility locations on site marked out or otherwise identified on facility? (Y/N) N

If no, identify activity modifications to address unidentified utilities, on-site utility lines, and other buried anomalies:

**Buddy System required? (Y/N) N**

If yes, describe circumstances:

If no, describe communication contingencies:

<sup>11</sup> If unknown, treat as high hazard until sufficient information has been developed

**If stored energy/energized equipment is present: N**

Is LO-TO required? (Y/N)

Specify equipment to be locked out/tagged out:

Follow the LO-TO procedure. List any differences or additions below:

Add photos of equipment subject to LO-TO to back of plan.

If LO-TO is not required, describe actions to ensure stored energy/energized equipment is managed during equipment set up, operation, and demobilization:

**Exclusion Zones:**

Will exclusion zones be used at the site? (Y/N) N

If yes, indicate zones on the site map.

**PPE**

Specify primary protective equipment to be worn during this task		Specify applicable activities
Level C		
Level D		
Level D Modified	X	No Tyvek; follow protocol in QAPP for sampling; sampling
If PPE beyond Level D is required, consult the Project Manager or Senior Management		

PPE Equipment	Primary	Contingency**	Trigger for Contingency Requirements**
<b><u>Respiratory</u></b>			
Respirator (full)			
Respirator (half)		X	
Cartridge type:			
P100			
Combo			
Other			
Dust Mask			
Other (specify)			
<b><u>Head and Eye</u></b>			
Safety Glasses	X		
Face Shield			
Goggles			
Hard Hat			
Other (specify)			
<b><u>Hearing</u></b>			
Ear plugs/muffs			
Dual			
<b><u>Feet</u></b>			
Overboots			
Safety-toed Workboots	X		
Other (specify)			
<b><u>Hands</u></b>			
Nitrile Gloves	X		
Overgloves			
Other (specify)			
<b><u>Body</u></b>			

PPE Equipment	Primary	Contingency**	Trigger for Contingency Requirements**
Tyvek Coverall			
Polycoated Tyvek			
Cold Weather Gear (Carhart)			
Rain Gear		X	No PFAS
Safety Vest	X		
U.S. Coast Guard-approved life jacket or buoyant work vest			
Other (specify)			
<b>Other</b> (specify)			
COVID-19 related precautions	X		See Attachment A

**Other Equipment and Supplies:**

Lighting	
Potable Water	
Insect Repellent	
Fire Extinguisher (2.5 lb)	X
Fire Extinguisher (5 lb)	
Fire Extinguisher (10 lb)	
Eyewash Kit	
Spill Kit	X
First Aid Kit	X
Ring Buoys	
Lifesaving Skiff	
Portable Toilet	
Other (specify):	

**Operational Control Procedures and Work Instructions:** (Attach procedures to back of HASP)

**Decontamination Procedures:**

Follow the Field Decontamination Procedure. List any differences or additions below.

**Discharge Control Measures (Y/N) N**

If yes describe Discharge Control Measures:

**Waste Disposal Practices:**

Specify Waste Management Practices:

Waste Type	Sample	Containerize	Dispose of off Site	Return to Site	Dispose in FE Solid Waste
Drill Cuttings					
Purge Water		X		X	
Soil		X		X	
PPE and other field related waste					X
Other (Specify)					

**Additional waste handling instructions:**

**Other instructions:**

**General Safe Work Practices:**

To ensure the safety of First Environment personnel and the public at a site where fieldwork is being conducted, the Safe Work Practices listed below will be followed.

- Good housekeeping practices are to be maintained.
- A "buddy system" in which another worker is close enough to render immediate aid will be in effect when specified in the HASP.
- In the event of treacherous weather-related working conditions field tasks will be suspended until conditions improve or appropriate protection from the elements is provided.
- Smoking, eating, chewing gum or tobacco, or drinking are forbidden except in clean or designated area.
- Ignition of flammable liquids within or through improvised heating devices is forbidden.
- Contact with samples, excavated materials, or other contaminated materials must be minimized.
- Use of contact lenses is not advisable.
- If drilling equipment is involved, know where the 'kill switch' is.
- All electrical equipment used in outside locations, wet area or near water must be plugged into ground fault circuit interrupter protected outlets.
- Illumination - Work in the early morning or at dusk may require site lighting.

List any differences or additions below:

**Emergency Preparedness:** (Attach procedures to back of HASP)

**Field Emergency Response:**

Follow the Field Emergency Response Procedure. List any differences or additions below

**Spill Response:**

Follow the Field Spill Response Procedure. List any differences or additions below.

**Is a stand-by external emergency response contractor required? (Y/N) If yes, explain: N**

: Contractor:	Date Contacted:	Contacted by:



**In the event of an injury, incident or release, notify the PM, senior management, and HR as soon as safe to do so.**

## H&S Monitoring and Measurement:

### H&S field monitoring required? Y/N Y

If so, follow the Health and Safety Monitoring Table below.

Type of Meter/Monitoring	Monitors	Check if to be Used	Surveillance Methodology (select one)		Monitoring Locations	Guidance Action Levels*	Site Action Levels**
			Determined by FTL Based on Site Conditions	Specified Frequency			
<u>Photoionization Detector (PID)</u>  <u>9.8eV</u> <u>10.2eV</u> <u>10.6 eV</u> <u>11.7eV</u>  <u>Dust Monitoring</u>	Total Volatile Organics levels  Fugitive dust					5 ppm above background - evacuate and notify  100 mg/m <sup>3</sup> , above background, halt activity, suppress dust. <u>9.8eV</u> <u>10.2eV</u> <u>10.6 eV</u> <u>11.7eV</u>  <u>Dust Monitoring</u>	<u>Photoionization Detector (PID)</u>
<u>Flame Ionization Detector (FID)</u>	Total Volatile Organics levels					5 ppm above background - evacuate and notify	
<u>Multi-gas meters</u>  <u>Oxygen</u>  <u>Combustible Gas</u>  <u>CO</u>  <u>H2S</u>  <u>Other Gas (Specify)</u>	Oxygen levels  LEL  Toxic gas levels Toxic gas levels					< 21% - notify < 19.5% - evacuate 10-20% - notify >20% - evacuate >9 ppm – notify  >10 ppm – notify	
<u>Other equipment (specify)</u>							

\* For notify action levels, move off worksite and contact PM to take corrective action or upgrade PPE. For evacuation, move off worksite and contact PM for further instructions.

\*\*If site levels are different from guidance levels specify reason:

### Heat and cold monitoring required: (Y/N) Y

If required, follow precautions in attached heat and cold guides.

### Corrective/Preventive Action

In the event that corrective action becomes necessary and is taken in the field or a necessary preventive action is identified, the Field Team must ensure the notification of the PM so that appropriate modifications can be made to the HASP and fieldwork activities. In the event that a corrective or preventive action has application beyond the

immediate project and work being performed or in the event of an incident or accident, a PCAN must be filed by the PM or Field Team Leader.

**Audits**

As part of First Environment's Management System, the HASP and its implementation are subject to internal audit and audit by our third party auditor. Findings are addressed through the PCAN Process.

## Section 10: Plan Approval

The HASP must be reapproved for each new task and when a task in the HASP is revised. Minor revisions in the field may be made by the FTL. The FTL make changes, initials the changes, and documents the specifics on the last page of this HASP. Changes are cleared with the Project Manager who ensures others are consulted as necessary.

In signing this plan, the signatories are confirming to the best of their knowledge the accuracy, adequacy, and suitability of the plan to address the H&S risks associated with the planned work.

### HASP Initial Tasks

Complete each time a new task is added to the HASP

#### TASK   A

Plan Prepared by:  Date:

Plan Reviewed/Approved by:  Date:

Project Manager:  Date:

#### TASK   B

Plan Prepared by:  Date:

Plan Reviewed/Approved by:  Date:

Project Manager:  Date:

#### TASK   C

Plan Prepared by:  Date:

Plan Reviewed/Approved by:  Date:

Project Manager:  Date:

#### TASK   D

Plan Prepared by:  Date:

Plan Reviewed/Approved by:  Date:

Project Manager:  Date:

Add additional tasks as required.

### HASP Task Revisions

Complete if the HASP is revised for a particular Task or Tasks.

#### TASK E

Plan Revised by:  Date:

Revision Reviewed/Approved by:  Date:

Project Manager:  Date:

#### TASK ALL

Plan Revised by:  Date:

Revision Reviewed/Approved by:  Date:

Project Manager:  Date:

#### TASK \_\_\_\_\_

Plan Revised by:  Date:

Revision Reviewed/Approved by:  Date:

Project Manager:  Date:

#### TASK \_\_\_\_\_

Plan Revised by:  Date:

Revision Reviewed/Approved by:  Date:

Project Manager:  Date:

Add additional tasks as required

## Section 11: FE Field Personnel Acknowledgement

First Environment employees assigned to work on site have attended 40-hour HAZWOPER training and annual refreshers, as applicable, per 29 CFR 1910.120, and have been certified medically fit by a qualified occupational physician to work on hazardous sites and to wear a respirator. Medical and training records are maintained by Human Resources.

By signing below, First Environment employees acknowledge that they:

- Have participated in the morning meeting and been briefed on work to be performed and site H&S.
- Have read and understand this Site HASP.
- Have raised and had adequately answered any questions about the HASP and site H&S (all employees are authorized to raise health and safety concerns through the leadership chain and HR if required before beginning or continuing work).
- Meet the training and medical fitness requirements.
- Understand the process of continual improvement and will use the PCAN process.
- Agree to notify the field team leader of any unsafe conditions in the field as soon as they are observed or encountered.

	Name	Responsibilities	Site Task/#	Signature	Date
1		FTL / FT / FHSO			
2		FTL / FT / FHSO			
3		FTL / FT / FHSO			
4		FTL / FT / FHSO			
5		FTL / FT / FHSO			
6		FTL / FT / FHSO			
7		FTL / FT / FHSO			
8		FTL / FT / FHSO			
9		FTL / FT / FHSO			
10		FTL / FT / FHSO			
11		FTL / FT / FHSO			

	Name	Responsibilities	Site Task/#	Signature	Date
12		FTL / FT / FHSO			
13		FTL / FT / FHSO			
14		FTL / FT / FHSO			
15		FTL / FT / FHSO			
16		FTL / FT / FHSO			
17		FTL / FT / FHSO			
18		FTL / FT / FHSO			
19		FTL / FT / FHSO			
20		FTL / FT / FHSO			
21		FTL / FT / FHSO			
22		FTL / FT / FHSO			
23		FTL / FT / FHSO			
24		FTL / FT / FHSO			
25		FTL / FT / FHSO			
26		FTL / FT / FHSO			
27		FTL / FT / FHSO			
28		FTL / FT / FHSO			
29		FTL / FT / FHSO			
30		FTL / FT / FHSO			

	Name	Responsibilities	Site Task/#	Signature	Date
31		FTL / FT / FHSO			
32		FTL / FT / FHSO			
33		FTL / FT / FHSO			
34		FTL / FT / FHSO			
35		FTL / FT / FHSO			
36		FTL / FT / FHSO			
37		FTL / FT / FHSO			
38		FTL / FT / FHSO			
39		FTL / FT / FHSO			
40		FTL / FT / FHSO			
41		FTL / FT / FHSO			
42		FTL / FT / FHSO			
43		FTL / FT / FHSO			
44		FTL / FT / FHSO			
45		FTL / FT / FHSO			
46		FTL / FT / FHSO			
47		FTL / FT / FHSO			
48		FTL / FT / FHSO			





<b>Contractor</b>	<b>Responsibilities</b>	<b>Date</b>	<b>Contractor Provided FE Safety Guide<sup>12</sup></b>	<b>Subcontract on site and correct for tasks to be performed (Y/N)</b>	<b>Contractor HASP on Site (Y/N)<sup>13</sup></b>	<b>Contractor Participated in Morning Meeting (Y/N)</b>	<b>Describe Corrective Action taken in case of deficiencies. Contractor work cannot proceed until deficiencies are addressed.</b>	<b>Signature FE Field Team Leader</b>

If review of the plan at the site indicates changes to the HASP are necessary, provide the specifics below (Make changes in the HASP and initial the changes). Notify Project Manager after occurrence for minor changes. Clear major changes with Project Manager prior to performing work.

---

---

---

---

---

---

---

---

Date: \_\_\_\_\_

FTL: \_\_\_\_\_

**Section 12** Attach current versions of Safety Data Sheets and procedures relevant to site work

MSDS# 26970

Section 1 - Chemical Product and Company Identification

MSDS Name: 1,4-Dioxane

Catalog Numbers: AC117110000, AC117110010, AC117110025, AC117110050, AC117110250, AC167800000, AC167800000, AC167800010, AC167800025, AC167805000, AC268340000, AC268340010, AC268340010, AC268340025, AC270490000, AC270490010, AC270490025, AC270492500, AC270492500, AC326890000, AC326890010, AC326891000, AC326892500, AC364340000, AC364340000, AC364340010, AC364341000, AC408820000, AC408820010, AC61033019, AC61033019, AC61033019, AC61033050, AC61033050, AC61033115, AC61033115, AC61033200, AC61033200, AC61033200, 40882-5000, 61033-1000, 61512-0010, 61512-1000, BP2611-100, D111-4, D111-4LC, D111-500, D116-200, D116-4, D117-1, D117RS-19, D117RS-200, D117RS-50, D56S-4, NC9734646

Synonyms: Diox; Diethylene dioxide; OptiDry.

Company Identification: Fisher Scientific  
One Reagent Lane  
Fair Lawn, NJ 07410  
For information in the US, call: 201-796-7100  
Emergency Number US: 201-796-7100  
CHEMTREC Phone Number, US: 800-424-9300

Section 2 - Composition, Information on Ingredients

CAS#: 123-91-1  
Chemical Name: 1,4-Dioxane  
%: 97+  
EINECS#: 204-661-8

Hazard Symbols:

XN F



Risk Phrases:

11 19 36/37 40 66

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Danger! May form explosive peroxides. Flammable liquid and vapor. Causes eye, skin, and respiratory tract irritation. Repeated exposure may cause skin dryness or cracking. Possible cancer hazard. May cause cancer based on animal data.

Target Organs: Kidneys, central nervous system, liver, respiratory system, eyes, skin.

Potential Health Effects

Eye: Causes eye irritation.

Skin: May cause skin irritation. Causes skin irritation. May be harmful if absorbed through the skin. Repeated or prolonged exposure may cause drying and cracking of the skin.

Ingestion: May cause irritation of the digestive tract. May cause central nervous system depression, characterized by excitement, followed by headache, dizziness, drowsiness, and nausea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure. May be harmful if swallowed.

Inhalation of high concentrations may cause central nervous system effects characterized by nausea, headache,

Inhalation: dizziness, unconsciousness and coma. Causes respiratory tract irritation. May cause liver and kidney damage. May be harmful if inhaled.

Chronic: Possible cancer hazard based on tests with laboratory animals. May cause liver and kidney damage. Adverse reproductive effects have been reported in animals. Laboratory experiments have resulted in mutagenic effects. Chronic exposure may cause blood effects. Exposure to high concentrations may cause central nervous system depression. Animal studies have reported the development of tumors.

#### Section 4 - First Aid Measures

Eyes: Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.

Skin: Get medical aid. Immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.

Ingestion: Do not induce vomiting. Get medical aid.

Inhalation: Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician:

#### Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Vapors may form an explosive mixture with air. Vapors can travel to a source of ignition and flash back. Will burn if involved in a fire. Flammable liquid and vapor. May form explosive peroxides.

Extinguishing Media: Use water spray, dry chemical, carbon dioxide, or alcohol-resistant foam.

Autoignition Temperature: 180 deg C ( 356.00 deg F)

Flash Point: 12 deg C ( 53.60 deg F)

Explosion Limits: Lower: 2 vol %

Explosion Limits: Upper: 22 vol %

NFPA Rating: health: 2; flammability: 3; instability: 3;

#### Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks: Absorb spill with inert material (e.g. vermiculite, sand or earth), then place in suitable container. Wear a self contained breathing apparatus and appropriate personal protection. (See Exposure Controls, Personal Protection section). Remove all sources of ignition. Use a spark-proof tool. Do not let this chemical enter the environment.

#### Section 7 - Handling and Storage

Handling: Use spark-proof tools and explosion proof equipment. Do not get in eyes, on skin, or on clothing. Take precautionary measures against static discharges. Keep away from heat, sparks and flame. Do not ingest or inhale. Use only in a chemical fume hood. If peroxide formation is suspected, do not open or move container. Do not distill to dryness. Test for peroxide formation before distillation.

Storage: Keep away from sources of ignition. Store in a tightly closed container. Store in a dry area. Flammables-area. Regularly check inhibitor levels to maintain peroxide levels below 1%. After opening, purge container with nitrogen before reclosing. Periodically test for peroxide formation on long-term storage. Addition of water or appropriate reducing materials will lessen peroxide formation. Store under nitrogen. Containers should be dated when opened and tested periodically for the presence of peroxides. Should crystals form in a peroxidizable liquid, peroxidation may have occurred and the product should be considered extremely dangerous. In this instance, the container should only be opened remotely by professionals. May form explosive peroxides on prolonged storage.

#### Section 8 - Exposure Controls, Personal Protection

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs

1,4-Dioxane	20 ppm; Skin - potential significant contribution to overall exposure by the cutaneous route	500 ppm IDLH	100 ppm TWA; 360 mg/m3 TWA
-------------	--	--------------	----------------------------

OSHA Vacated PELs: 1,4-Dioxane: 25 ppm TWA; 90 mg/m3 TWA

Engineering Controls:

Use explosion-proof ventilation equipment. Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use only under a chemical fume hood.

Exposure Limits

Personal Protective Equipment

Eyes: Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

Section 9 - Physical and Chemical Properties

Physical State: Liquid

Color: clear, colorless - APHA: 15 max

Odor: ethereal odor

pH: 6 - 8 (500 g/L aq.sol.)

Vapor Pressure: 41 mbar @ 20 deg C

Vapor Density: Not available

Evaporation Rate: Not available

Viscosity: 1.54 cPa @ 20 deg C

Boiling Point: 101 deg C @ 760 mmHg ( 213.80°F)

Freezing/Melting Point: 12 deg C ( 53.60°F)

Decomposition Temperature: Not available

Solubility in water: Soluble

Specific Gravity/Density: 1.030

Molecular Formula: C4H8O2

Molecular Weight: 88.11

Section 10 - Stability and Reactivity

Chemical Stability: May form explosive peroxides. Moisture sensitive.

Conditions to Avoid: Incompatible materials, light, ignition sources, excess heat, exposure to moist air or water, electrical sparks.

Incompatibilities with Other Materials: Strong oxidizing agents, reducing agents, halogens, silver perchlorate, oxygen.

Hazardous Decomposition Products: Carbon monoxide, carbon monoxide, carbon dioxide.

Hazardous Polymerization: Will not occur.

Section 11 - Toxicological Information

RTECS#: CAS# 123-91-1: JG8225000

RTECS:

CAS# 123-91-1: Draize test, rabbit, eye: 100 mg Severe;

Draize test, rabbit, eye: 100 mg/24H Moderate;

Inhalation, mouse: LC50 = 37 gm/m3/2H;

Inhalation, rat: LC50 = 46 gm/m3/2H;

LD50/LC50:  
Oral, mouse: LD50 = 5300 mg/kg;  
Oral, rabbit: LD50 = 2 gm/kg;  
Oral, rat: LD50 = 4200 mg/kg;  
Skin, rabbit: LD50 = 7600 uL/kg;

Carcinogenicity: 1,4-Dioxane - ACGIH: A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans  
California: carcinogen, initial date 1/1/88 NTP: Suspect carcinogen IARC: Group 2B carcinogen

Other: See actual entry in RTECS for complete information.

#### Section 12 - Ecological Information

Ecotoxicity: Fish: Bluegill/Sunfish: LC50 = >10,000mg/L; 96 Hr.; Static conditions, 23 degrees C  
Water flea Daphnia: EC50 =163 mg/L; 48 Hr.; Static Condition, 20-21 degrees C

#### Section 13 - Disposal Considerations

Dispose of in a manner consistent with federal, state, and local regulations.

#### Section 14 - Transport Information

#### US DOT

Shipping Name: DIOXANE

Hazard Class: 3

UN Number: UN1165

Packing Group: II

Canada TDG

Shipping Name: DIOXANE

Hazard Class: 3

UN Number: UN1165

Packing Group: II

USA RQ: CAS# 123-91-1: 100 lb final RQ; 45.4 kg final RQ

#### Section 15 - Regulatory Information

#### European/International Regulations

##### European Labeling in Accordance with EC Directives

Hazard Symbols: XN F

Risk Phrases:

R 11 Highly flammable.

R 19 May form explosive peroxides.

R 36/37 Irritating to eyes and respiratory system.

R 40 Limited evidence of a carcinogenic effect.

R 66 Repeated exposure may cause skin dryness or cracking.

Safety Phrases:

S 9 Keep container in a well-ventilated place.

S 16 Keep away from sources of ignition - No smoking.

S 36/37 Wear suitable protective clothing and gloves.

S 46 If swallowed, seek medical advice immediately and show this container or label.

#### WGK (Water Danger/Protection)

CAS# 123-91-1: 2

#### Canada

CAS# 123-91-1 is listed on Canada's DSL List

Canadian WHMIS Classifications: B2, D2A, D2B, F

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

CAS# 123-91-1 is listed on Canada's Ingredient Disclosure List

US Federal

TSCA

CAS# 123-91-1 is listed on the TSCA  
Inventory.

Section 16 - Other Information

MSDS Creation Date: 6/16/1999

Revision #10 Date 7/20/2009

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall the company be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential, or exemplary damages howsoever arising, even if the company has been advised of the possibility of such damages.

-----

## SAFETY DATA SHEET

Creation Date 04-Feb-2010

Revision Date 18-Jan-2018

Revision Number 6

### 1. Identification

**Product Name** 1,2-Dichloroethane

**Cat No. :** E175-4; E175-20; E175-500; E175RS-19; E175RS-50; E190-4

**CAS-No** 107-06-2

**Synonyms** Ethylene dichloride; Ethylene chloride (Certified ACS/Spectranalyzed)

**Recommended Use** Laboratory chemicals.

**Uses advised against** Not for food, drug, pesticide or biocidal product use

#### Details of the supplier of the safety data sheet

##### Company

Fisher Scientific  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

##### **Emergency Telephone Number**

CHEMTREC®, Inside the USA: 800-424-9300  
CHEMTREC®, Outside the USA: 001-703-527-3887

### 2. Hazard(s) identification

#### Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids	Category 2
Acute oral toxicity	Category 4
Acute Inhalation Toxicity - Vapors	Category 3
Skin Corrosion/Irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Carcinogenicity	Category 1B
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Respiratory system, Central nervous system (CNS).	
Specific target organ toxicity - (repeated exposure)	Category 2
Target Organs - Kidney, Liver, Heart, Blood.	

#### Label Elements

##### **Signal Word**

Danger

##### **Hazard Statements**

Highly flammable liquid and vapor  
Harmful if swallowed  
Causes skin irritation  
Causes serious eye irritation

Toxic if inhaled  
May cause respiratory irritation  
May cause drowsiness or dizziness  
May cause cancer  
May cause damage to organs through prolonged or repeated exposure



### Precautionary Statements

#### Prevention

Obtain special instructions before use  
Do not handle until all safety precautions have been read and understood  
Use personal protective equipment as required  
Wash face, hands and any exposed skin thoroughly after handling  
Do not eat, drink or smoke when using this product  
Use only outdoors or in a well-ventilated area  
Wear eye/face protection  
Do not breathe dust/fume/gas/mist/vapors/spray  
Keep away from heat/sparks/open flames/hot surfaces. - No smoking  
Keep container tightly closed  
Ground/bond container and receiving equipment  
Use explosion-proof electrical/ventilating/lighting/equipment  
Use only non-sparking tools  
Take precautionary measures against static discharge  
Keep cool

#### Response

IF exposed or concerned: Get medical attention/advice

#### Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing  
Call a POISON CENTER or doctor/physician

#### Skin

If skin irritation occurs: Get medical advice/attention  
IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower  
Wash contaminated clothing before reuse

#### Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing  
If eye irritation persists: Get medical advice/attention

#### Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell  
Rinse mouth

#### Fire

In case of fire: Use CO<sub>2</sub>, dry chemical, or foam for extinction

#### Storage

Store locked up  
Store in a well-ventilated place. Keep container tightly closed

#### Disposal

Dispose of contents/container to an approved waste disposal plant

#### Hazards not otherwise classified (HNOC)

**WARNING.** Cancer - <https://www.p65warnings.ca.gov/>.

## 3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Ethylene dichloride	107-06-2	>95

#### 4. First-aid measures

<b>General Advice</b>	Show this safety data sheet to the doctor in attendance. Immediate medical attention is required.
<b>Eye Contact</b>	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Immediate medical attention is required.
<b>Skin Contact</b>	Wash off immediately with plenty of water for at least 15 minutes. Immediate medical attention is required.
<b>Inhalation</b>	Move to fresh air. If breathing is difficult, give oxygen. Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Immediate medical attention is required.
<b>Ingestion</b>	Do not induce vomiting. Call a physician or Poison Control Center immediately.
<b>Most important symptoms and effects</b>	Breathing difficulties. May cause cardiac arrhythmia. May cause central nervous system depression: Symptoms may include tightness in the chest, flushing, headache, nausea, vomiting, respiratory depression, weakness, irregular heartbeat, abdominal pain, convulsions, and shock
<b>Notes to Physician</b>	Treat symptomatically

#### 5. Fire-fighting measures

<b>Suitable Extinguishing Media</b>	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide. Cool closed containers exposed to fire with water spray.
<b>Unsuitable Extinguishing Media</b>	Water may be ineffective
<b>Flash Point</b>	13 °C / 55.4 °F
<b>Method -</b>	No information available
<b>Autoignition Temperature</b>	440 °C / 824 °F
<b>Explosion Limits</b>	
<b>Upper</b>	15.9 vol %
<b>Lower</b>	6.2 vol %
<b>Sensitivity to Mechanical Impact</b>	No information available
<b>Sensitivity to Static Discharge</b>	No information available

#### Specific Hazards Arising from the Chemical

Flammable. Containers may explode when heated. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Keep product and empty container away from heat and sources of ignition. Thermal decomposition can lead to release of irritating gases and vapors.

#### Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO<sub>2</sub>) Hydrogen chloride gas Phosgene

#### Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

#### NFPA

**Health**  
3

**Flammability**  
3

**Instability**  
0

**Physical hazards**  
N/A

## 6. Accidental release measures

<b>Personal Precautions</b>	Use personal protective equipment. Evacuate personnel to safe areas. Keep people away from and upwind of spill/leak. Ensure adequate ventilation. Remove all sources of ignition. Take precautionary measures against static discharges.
<b>Environmental Precautions</b>	Should not be released into the environment. See Section 12 for additional ecological information.
<b>Methods for Containment and Clean Up</b>	Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

## 7. Handling and storage

<b>Handling</b>	Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Do not ingest. Use only under a chemical fume hood. Do not breathe vapors or spray mist. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded. Take precautionary measures against static discharges.
<b>Storage</b>	Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat and sources of ignition.

## 8. Exposure controls / personal protection

### Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Ethylene dichloride	TWA: 10 ppm	(Vacated) TWA: 1 ppm (Vacated) TWA: 4 mg/m <sup>3</sup> Ceiling: 100 ppm (Vacated) STEL: 2 ppm (Vacated) STEL: 8 mg/m <sup>3</sup> TWA: 50 ppm	IDLH: 50 ppm TWA: 1 ppm TWA: 4 mg/m <sup>3</sup> STEL: 2 ppm STEL: 8 mg/m <sup>3</sup>	TWA: 10 ppm TWA: 40 mg/m <sup>3</sup>

### Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

<b>Engineering Measures</b>	Use only under a chemical fume hood. Use explosion-proof electrical/ventilating/lighting/equipment. Ensure that eyewash stations and safety showers are close to the workstation location. Ensure adequate ventilation, especially in confined areas.
-----------------------------	---

### Personal Protective Equipment

<b>Eye/face Protection</b>	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166. Tightly fitting safety goggles. Face-shield.
<b>Skin and body protection</b>	Wear appropriate protective gloves and clothing to prevent skin exposure.
<b>Respiratory Protection</b>	Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.
<b>Hygiene Measures</b>	Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

<b>Physical State</b>	Liquid
<b>Appearance</b>	Colorless
<b>Odor</b>	sweet
<b>Odor Threshold</b>	400 ppm
<b>pH</b>	No information available
<b>Melting Point/Range</b>	-35 °C / -31 °F
<b>Boiling Point/Range</b>	81 - 85 °C / 177.8 - 185 °F
<b>Flash Point</b>	13 °C / 55.4 °F
<b>Evaporation Rate</b>	6.5 (Butyl Acetate = 1.0)
<b>Flammability (solid,gas)</b>	Not applicable
<b>Flammability or explosive limits</b>	
<b>Upper</b>	15.9 vol %
<b>Lower</b>	6.2 vol %
<b>Vapor Pressure</b>	65 mmHg @ 29 °C
<b>Vapor Density</b>	3.4
<b>Specific Gravity</b>	1.250
<b>Solubility</b>	Insoluble in water
<b>Partition coefficient; n-octanol/water</b>	No data available
<b>Autoignition Temperature</b>	440 °C / 824 °F
<b>Decomposition Temperature</b>	No information available
<b>Viscosity</b>	0.8 mPa s at 20 °C
<b>Molecular Formula</b>	C <sub>2</sub> H <sub>4</sub> Cl <sub>2</sub>
<b>Molecular Weight</b>	98.96

## 10. Stability and reactivity

<b>Reactive Hazard</b>	None known, based on information available
<b>Stability</b>	Stable under normal conditions.
<b>Conditions to Avoid</b>	Incompatible products. Excess heat. Keep away from open flames, hot surfaces and sources of ignition.
<b>Incompatible Materials</b>	Strong oxidizing agents, Bases, Alkali metals
<b>Hazardous Decomposition Products</b>	Carbon monoxide (CO), Carbon dioxide (CO <sub>2</sub> ), Hydrogen chloride gas, Phosgene
<b>Hazardous Polymerization</b>	Hazardous polymerization does not occur.
<b>Hazardous Reactions</b>	None under normal processing.

## 11. Toxicological information

### Acute Toxicity

#### Product Information

#### Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Ethylene dichloride	625 mg/kg ( Rat ) 413 mg/kg ( Mouse )	2800 mg/kg ( Rabbit )	28.79 mg/L ( Rat ) 1h 7.8 mg/l ( Rat ) 4h

**Toxicologically Synergistic Products** No information available

#### Delayed and immediate effects as well as chronic effects from short and long-term exposure

**Irritation** Irritating to eyes, respiratory system and skin

**Sensitization** No information available

**Carcinogenicity** The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Ethylene dichloride	107-06-2	Group 2B	Reasonably Anticipated	Not listed	X	Not listed

IARC: (International Agency for Research on Cancer)

IARC: (International Agency for Research on Cancer)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans

Group 2B - Possibly Carcinogenic to Humans

NTP: (National Toxicity Program)

Known - Known Carcinogen

Reasonably Anticipated - Reasonably Anticipated to be a Human Carcinogen

NTP: (National Toxicity Program)

**Mutagenic Effects** No information available

**Reproductive Effects** No information available.

**Developmental Effects** No information available.

**Teratogenicity** No information available.

**STOT - single exposure** Respiratory system Central nervous system (CNS)

**STOT - repeated exposure** Kidney Liver Heart Blood

**Aspiration hazard** No information available

**Symptoms / effects, both acute and delayed** May cause central nervous system depression: Symptoms may include tightness in the chest, flushing, headache, nausea, vomiting, respiratory depression, weakness, irregular heartbeat, abdominal pain, convulsions, and shock

**Endocrine Disruptor Information** No information available

**Other Adverse Effects** The toxicological properties have not been fully investigated.

## 12. Ecological information

### Ecotoxicity

Do not empty into drains.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Ethylene dichloride	EC50: = 166 mg/L, 96h static (Desmodesmus subspicatus) EC50: > 433 mg/L, 96h (Pseudokirchneriella subcapitata)	LC50: 110 - 123 mg/L, 96h flow-through (Pimephales promelas) LC50: 230 - 710 mg/L, 96h flow-through (Lepomis macrochirus) LC50: = 225 mg/L, 96h static (Oncorhynchus mykiss)	Not listed	EC50: 140 - 190 mg/L, 48h Static (Daphnia magna)

**Persistence and Degradability** Persistence is unlikely based on information available.

**Bioaccumulation/ Accumulation** No information available.

**Mobility** Will likely be mobile in the environment due to its volatility.

Component	log Pow
Ethylene dichloride	1.45

## 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Ethylene dichloride - 107-06-2	U077	-

## 14. Transport information

### DOT

UN-No	UN1184
Proper Shipping Name	ETHYLENE DICHLORIDE
Hazard Class	3
Subsidiary Hazard Class	6.1
Packing Group	II

### TDG

UN-No	UN1184
Proper Shipping Name	ETHYLENE DICHLORIDE
Hazard Class	3
Subsidiary Hazard Class	6.1
Packing Group	II

### IATA

UN-No	UN1184
Proper Shipping Name	ETHYLENE DICHLORIDE
Hazard Class	3
Subsidiary Hazard Class	6.1
Packing Group	II

### IMDG/IMO

UN-No	UN1184
Proper Shipping Name	ETHYLENE DICHLORIDE
Hazard Class	3
Subsidiary Hazard Class	6.1
Packing Group	II

## 15. Regulatory information

All of the components in the product are on the following Inventory lists: X = listed

### International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Ethylene dichloride	X	X	-	203-458-1	-		X	X	X	X	X

#### Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

### U.S. Federal Regulations

#### TSCA 12(b)

Component	TSCA 12(b)
Ethylene dichloride	Section 4

#### SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Ethylene dichloride	107-06-2	>95	0.1

**SARA 311/312 Hazard Categories** See section 2 for more information

**CWA (Clean Water Act)**

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Ethylene dichloride	X	100 lb	X	X

**Clean Air Act**

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Ethylene dichloride	X		-

**OSHA** Occupational Safety and Health Administration  
Not applicable

**CERCLA** This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Ethylene dichloride	100 lb 1 lb	-

**California Proposition 65** This product contains the following proposition 65 chemicals

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Ethylene dichloride	107-06-2	Carcinogen	10 µg/day	Carcinogen

**U.S. State Right-to-Know Regulations**

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Ethylene dichloride	X	X	X	X	-

**U.S. Department of Transportation**

Reportable Quantity (RQ): Y  
DOT Marine Pollutant N  
DOT Severe Marine Pollutant N

**U.S. Department of Homeland Security**

This product does not contain any DHS chemicals.

**Other International Regulations**

**Mexico - Grade** Serious risk, Grade 3

## 16. Other information

**Prepared By** Regulatory Affairs  
Thermo Fisher Scientific  
Email: EMSDS.RA@thermofisher.com

**Creation Date** 04-Feb-2010  
**Revision Date** 18-Jan-2018  
**Print Date** 18-Jan-2018  
**Revision Summary** This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

**Disclaimer**

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

**End of SDS**

## SAFETY DATA SHEET

Creation Date 16-Sep-2014

Revision Date 23-Jan-2018

Revision Number 3

### 1. Identification

**Product Name** trans-1,2-Dichloroethylene, stabilized

**Cat No. :** AC406840000; AC406840250; AC406842500

**CAS-No** 156-60-5  
**Synonyms** trans-Acetylene dichloride

**Recommended Use** Laboratory chemicals.  
**Uses advised against** Food, drug, pesticide or biocidal product use.  
**Details of the supplier of the safety data sheet**

**Company**

Fisher Scientific  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

Acros Organics  
One Reagent Lane  
Fair Lawn, NJ 07410

**Emergency Telephone Number**

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11  
Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99  
**CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

### 2. Hazard(s) identification

**Classification**

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids	Category 2
Acute oral toxicity	Category 4
Acute Inhalation Toxicity - Vapors	Category 4

**Label Elements**

**Signal Word**  
Danger

**Hazard Statements**  
Highly flammable liquid and vapor  
Harmful if swallowed or if inhaled

**Precautionary Statements****Prevention**

Wash face, hands and any exposed skin thoroughly after handling  
 Do not eat, drink or smoke when using this product  
 Avoid breathing dust/fume/gas/mist/vapors/spray  
 Use only outdoors or in a well-ventilated area  
 Keep away from heat/sparks/open flames/hot surfaces. - No smoking  
 Keep container tightly closed  
 Ground/bond container and receiving equipment  
 Use explosion-proof electrical/ventilating/lighting/equipment  
 Use only non-sparking tools  
 Take precautionary measures against static discharge  
 Wear protective gloves/protective clothing/eye protection/face protection

**Inhalation**

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing  
 Call a POISON CENTER or doctor/physician if you feel unwell

**Ingestion**

Rinse mouth

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

**Fire**

In case of fire: Use CO<sub>2</sub>, dry chemical, or foam for extinction  
 Explosion risk in case of fire  
 Fight fire with normal precautions from a reasonable distance  
 Evacuate area

**Storage**

Store in a well-ventilated place. Keep cool

**Disposal**

Dispose of contents/container to an approved waste disposal plant

**Hazards not otherwise classified (HNOC)**

Harmful to aquatic life with long lasting effects

### 3. Composition/Information on Ingredients

Component	CAS-No	Weight %
trans-1,2-Dichloroethylene	156-60-5	>95

### 4. First-aid measures

**Eye Contact**

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get medical attention.

**Skin Contact**

Wash off immediately with plenty of water for at least 15 minutes. Get medical attention.

**Inhalation**

Remove from exposure, lie down. Remove to fresh air. Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Get medical attention. If not breathing, give artificial respiration.

**Ingestion**

Do NOT induce vomiting. Get medical attention.

<b>Most important symptoms and effects</b>	Difficulty in breathing. Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting
<b>Notes to Physician</b>	Treat symptomatically

## 5. Fire-fighting measures

<b>Suitable Extinguishing Media</b>	Water spray. Carbon dioxide (CO <sub>2</sub> ). Dry chemical. Chemical foam. Water mist may be used to cool closed containers. Water mist may be used to cool closed containers.
<b>Unsuitable Extinguishing Media</b>	No information available
<b>Flash Point</b>	6 °C / 42.8 °F
<b>Method -</b>	No information available
<b>Autoignition Temperature</b>	440 °C / 824 °F
<b>Explosion Limits</b>	
<b>Upper</b>	12.80%
<b>Lower</b>	9.70%
<b>Sensitivity to Mechanical Impact</b>	No information available
<b>Sensitivity to Static Discharge</b>	No information available

### Specific Hazards Arising from the Chemical

Flammable. Vapors may travel to source of ignition and flash back. Containers may explode when heated. Vapors may form explosive mixtures with air. Thermal decomposition can lead to release of irritating gases and vapors. Keep product and empty container away from heat and sources of ignition.

### Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO<sub>2</sub>). Phosgene. Hydrogen chloride gas.

### Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

### NFPA

<b>Health</b>	<b>Flammability</b>	<b>Instability</b>	<b>Physical hazards</b>
2	3	0	N/A

## 6. Accidental release measures

<b>Personal Precautions</b>	Remove all sources of ignition. Take precautionary measures against static discharges. Use personal protective equipment as required. Ensure adequate ventilation.
<b>Environmental Precautions</b>	Do not flush into surface water or sanitary sewer system. See Section 12 for additional Ecological Information. Avoid release to the environment. Collect spillage.
<b>Methods for Containment and Clean Up</b>	Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

## 7. Handling and storage

<b>Handling</b>	Wear personal protective equipment/face protection. Ensure adequate ventilation. Avoid contact with skin and eyes. Handle product only in closed system or provide appropriate exhaust ventilation. Use spark-proof tools and explosion-proof equipment. Use only non-sparking tools. Keep away from open flames, hot surfaces and sources of ignition. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded. Take precautionary measures against static discharges.
<b>Storage</b>	Keep in a dry, cool and well-ventilated place. Refer product specification and/or product

label for specific storage temperature requirement. Keep container tightly closed. Keep away from heat, sparks and flame. Flammables area. Keep container tightly closed in a dry and well-ventilated place.

## 8. Exposure controls / personal protection

### Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
trans-1,2-Dichloroethylene	TWA: 200 ppm			TWA: 200 ppm

### Legend

ACGIH - American Conference of Governmental Industrial Hygienists

**Engineering Measures** Ensure adequate ventilation, especially in confined areas. Use explosion-proof electrical/ventilating/lighting/equipment.

### Personal Protective Equipment

**Eye/face Protection** Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

**Skin and body protection** Wear appropriate protective gloves and clothing to prevent skin exposure.

**Respiratory Protection** Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

**Hygiene Measures** Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

Physical State	Liquid
Appearance	Colorless
Odor	aromatic
Odor Threshold	No information available
pH	6.5-7.2
Melting Point/Range	-50 °C / -58 °F
Boiling Point/Range	48 °C / 118.4 °F @ 760 mmHg
Flash Point	6 °C / 42.8 °F
Evaporation Rate	No information available
Flammability (solid,gas)	Not applicable
Flammability or explosive limits	
Upper	12.80%
Lower	9.70%
Vapor Pressure	331 mmHg @ 25 °C
Vapor Density	3.34 (Air = 1.0)
Specific Gravity	1.260
Solubility	Immiscible with water
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	440 °C / 824 °F
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C <sub>2</sub> H <sub>2</sub> Cl <sub>2</sub>
Molecular Weight	96.94

## 10. Stability and reactivity

<b>Reactive Hazard</b>	None known, based on information available
<b>Stability</b>	Stable under normal conditions.
<b>Conditions to Avoid</b>	Keep away from open flames, hot surfaces and sources of ignition. Exposure to air. Exposure to light. Incompatible products. Exposure to moist air or water.
<b>Incompatible Materials</b>	Bases, Strong acids, Strong oxidizing agents
<b>Hazardous Decomposition Products</b>	Carbon monoxide (CO), Carbon dioxide (CO <sub>2</sub> ), Phosgene, Hydrogen chloride gas
<b>Hazardous Polymerization</b>	Hazardous polymerization does not occur.
<b>Hazardous Reactions</b>	None under normal processing.

## 11. Toxicological information

### Acute Toxicity

#### Product Information Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
trans-1,2-Dichloroethylene	LD50 = 1235 mg/kg ( Rat )	>5 g/kg ( Rabbit )	LC50 = 24100 ppm ( Rat ) 4 h

**Toxicologically Synergistic Products** No information available

### Delayed and immediate effects as well as chronic effects from short and long-term exposure

**Irritation** No information available

**Sensitization** No information available

**Carcinogenicity** The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
trans-1,2-Dichloroethylene	156-60-5	Not listed				

**Mutagenic Effects** No information available

**Reproductive Effects** No information available.

**Developmental Effects** No information available.

**Teratogenicity** No information available.

**STOT - single exposure** None known

**STOT - repeated exposure** None known

**Aspiration hazard** No information available

**Symptoms / effects, both acute and delayed** Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting

**Endocrine Disruptor Information** No information available

**Other Adverse Effects** The toxicological properties have not been fully investigated.

## 12. Ecological information

### Ecotoxicity

Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
trans-1,2-Dichloroethylene	Not listed	LC50: = 135 mg/L, 96h static (Lepomis macrochirus)	Not listed	Not listed

**Persistence and Degradability** Persistence is unlikely based on information available.

**Bioaccumulation/ Accumulation** No information available.

**Mobility** Will likely be mobile in the environment due to its volatility.

Component	log Pow
trans-1,2-Dichloroethylene	1.48

### 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
trans-1,2-Dichloroethylene - 156-60-5	U079	-

### 14. Transport information

#### DOT

UN-No UN1150  
 Proper Shipping Name 1,2-DICHLOROETHYLENE  
 Hazard Class 3  
 Packing Group II

#### TDG

UN-No UN1150  
 Proper Shipping Name 1,2-DICHLOROETHYLENE  
 Hazard Class 3  
 Packing Group II

#### IATA

UN-No UN1150  
 Proper Shipping Name 1,2-DICHLOROETHYLENE  
 Hazard Class 3  
 Packing Group II

#### IMDG/IMO

UN-No UN1150  
 Proper Shipping Name 1,2-DICHLOROETHYLENE  
 Hazard Class 3  
 Packing Group II

### 15. Regulatory information

#### United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
trans-1,2-Dichloroethylene	156-60-5	X	ACTIVE	-

#### Legend:

TSCA - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

TSCA 12(b) - Notices of Export Not applicable

**International Inventories**

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
trans-1,2-Dichloroethylene	156-60-5	X	-	205-860-2	X	X	X	X	KE-10123

**U.S. Federal Regulations****SARA 313** Not applicable**SARA 311/312 Hazard Categories** See section 2 for more information**CWA (Clean Water Act)**

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
trans-1,2-Dichloroethylene	-	-	-	X

**Clean Air Act** Not applicable**OSHA - Occupational Safety and Health Administration** Not applicable

**CERCLA** This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
trans-1,2-Dichloroethylene	1000 lb 1 lb	-

**California Proposition 65** This product does not contain any Proposition 65 chemicals.**U.S. State Right-to-Know Regulations**

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
trans-1,2-Dichloroethylene	X	-	X	-	-

**U.S. Department of Transportation**

Reportable Quantity (RQ): N  
 DOT Marine Pollutant N  
 DOT Severe Marine Pollutant N

**U.S. Department of Homeland Security** This product does not contain any DHS chemicals.**Other International Regulations****Mexico - Grade** No information available

## 16. Other information

**Prepared By** Regulatory Affairs  
 Thermo Fisher Scientific  
 Email: EMSDS.RA@thermofisher.com

**Creation Date** 16-Sep-2014  
**Revision Date** 23-Jan-2018  
**Print Date** 23-Jan-2018

**Revision Summary** This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally

Harmonized System of Classification and Labeling of Chemicals (GHS).

**Disclaimer**

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

**End of SDS**



## Benzene

Version 1.9

Revision Date 2016-01-08

### SECTION 1: Identification of the substance/mixture and of the company/undertaking

#### Product information

Product Name : Benzene  
 Material : 1098293, 1059192, 1059060, 1037212, 1037213, 1037103,  
 1029170, 1037104, 1015526, 1016960

**Company** : Chevron Phillips Chemical Company LP  
 10001 Six Pines Drive  
 The Woodlands, TX 77380

#### Emergency telephone:

##### Health:

866.442.9628 (North America)

1.832.813.4984 (International)

##### Transport:

CHEMTREC 1.800.424.9300 (within USA and Canada) or 703.527.3887 (outside USA and Canada)

Asia: +800 CHEMCALL (+800 2436 2255) China: +86-21-22157316

EUROPE: BIG +32.14.584545 (phone) or +32.14583516 (telefax)

South America SOS-Cotec Inside Brazil: 0800.111.767 Outside Brazil: +55.19.3467.1600

Responsible Department : Product Safety and Toxicology Group  
 E-mail address : SDS@CPChem.com  
 Website : www.CPChem.com

### SECTION 2: Hazards identification

#### Classification of the substance or mixture

This product has been classified in accordance with the hazard communication standard 29 CFR 1910.1200; the SDS and labels contain all the information as required by the standard.

#### Emergency Overview

#### Danger

**Physical state:** Liquid    **Color:** Clear, Colorless    **Odor:** sweet, distinct

OSHA Hazards : Flammable Liquid, Aspiration hazard, Carcinogen, Moderate skin irritant, Moderate eye irritant, Mutagen, Target Organ Effects

#### Classification

**Benzene**

Version 1.9

Revision Date 2016-01-08

- : Flammable liquids , Category 2
- Skin irritation , Category 2
- Eye irritation , Category 2A
- Germ cell mutagenicity , Category 1B
- Carcinogenicity , Category 1A
- Specific target organ systemic toxicity - repeated exposure , Category 1 , Blood
- Aspiration hazard , Category 1

**Labeling**

Symbol(s)



Signal Word

: Danger

Hazard Statements

- : H225: Highly flammable liquid and vapor.
- H304: May be fatal if swallowed and enters airways.
- H315: Causes skin irritation.
- H319: Causes serious eye irritation.
- H340: May cause genetic defects.
- H350: May cause cancer.
- H372: Causes damage to organs (Blood) through prolonged or repeated exposure.

Precautionary Statements

- : **Prevention:**
- P201 Obtain special instructions before use.
- P202 Do not handle until all safety precautions have been read and understood.
- P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
- P233 Keep container tightly closed.
- P240 Ground/bond container and receiving equipment.
- P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.
- P242 Use only non-sparking tools.
- P243 Take precautionary measures against static discharge.
- P260 Do not breathe dust/fume/gas/mist/vapor/spray.
- P264 Wash skin thoroughly after handling.
- P270 Do not eat, drink or smoke when using this product.
- P280 Wear protective gloves/ eye protection/ face protection.
- P281 Use personal protective equipment as required.
- Response:**
- P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
- P303 + P361 + P353 IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
- P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- P308 + P313 IF exposed or concerned: Get medical advice/ attention.
- P331 Do NOT induce vomiting.
- P332 + P313 If skin irritation occurs: Get medical advice/ attention.
- P337 + P313 If eye irritation persists: Get medical advice/

**Benzene**

Version 1.9

Revision Date 2016-01-08

attention.

P362 Take off contaminated clothing and wash before reuse.

P370 + P378 In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.

**Storage:**

P403 + P235 Store in a well-ventilated place. Keep cool.

P405 Store locked up.

**Disposal:**

P501 Dispose of contents/ container to an approved waste disposal plant.

**Carcinogenicity:****IARC**

Group 1: Carcinogenic to humans

Benzene 71-43-2

**NTP**

Known to be human carcinogen

Benzene 71-43-2

**ACGIH**

Confirmed human carcinogen

Benzene 71-43-2

**SECTION 3: Composition/information on ingredients**

Synonyms : Aromatic Benzene  
Benzol  
Cyclohexatriene  
Phene  
Phenyl Hydride

Molecular formula : C<sub>6</sub>H<sub>6</sub>

Component	CAS-No.	Weight %
Benzene	71-43-2	100

**SECTION 4: First aid measures**

General advice : Move out of dangerous area. Show this material safety data sheet to the doctor in attendance. Material may produce a serious, potentially fatal pneumonia if swallowed or vomited.

If inhaled : If unconscious place in recovery position and seek medical advice. If symptoms persist, call a physician.

In case of skin contact : If skin irritation persists, call a physician. If on skin, rinse well with water. If on clothes, remove clothes.

In case of eye contact : Immediately flush eye(s) with plenty of water. Remove contact lenses. Protect unharmed eye. Keep eye wide open while rinsing. If eye irritation persists, consult a specialist.

If swallowed : Keep respiratory tract clear. Never give anything by mouth to an unconscious person. If symptoms persist, call a physician.

**Benzene**

Version 1.9

Revision Date 2016-01-08

Take victim immediately to hospital.

**SECTION 5: Firefighting measures**

Flash point	:	-11 °C (12 °F) Method: Tag closed cup
Autoignition temperature	:	498 °C (928 °F)
Suitable extinguishing media	:	Alcohol-resistant foam. Carbon dioxide (CO <sub>2</sub> ). Dry chemical.
Unsuitable extinguishing media	:	High volume water jet.
Specific hazards during fire fighting	:	Do not allow run-off from fire fighting to enter drains or water courses.
Special protective equipment for fire-fighters	:	Wear self-contained breathing apparatus for firefighting if necessary.
Further information	:	Collect contaminated fire extinguishing water separately. This must not be discharged into drains. Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations. For safety reasons in case of fire, cans should be stored separately in closed containments. Use a water spray to cool fully closed containers.
Fire and explosion protection	:	Do not spray on an open flame or any other incandescent material. Take necessary action to avoid static electricity discharge (which might cause ignition of organic vapors). Use only explosion-proof equipment. Keep away from open flames, hot surfaces and sources of ignition.
Hazardous decomposition products	:	No data available.

**SECTION 6: Accidental release measures**

Personal precautions	:	Use personal protective equipment. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapors accumulating to form explosive concentrations. Vapors can accumulate in low areas.
Environmental precautions	:	Prevent product from entering drains. Prevent further leakage or spillage if safe to do so. If the product contaminates rivers and lakes or drains inform respective authorities.
Methods for cleaning up	:	Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

**Benzene**

Version 1.9

Revision Date 2016-01-08

**SECTION 7: Handling and storage****Handling**

Advice on safe handling : Avoid formation of aerosol. Do not breathe vapors/dust. Avoid exposure - obtain special instructions before use. Avoid contact with skin and eyes. For personal protection see section 8. Smoking, eating and drinking should be prohibited in the application area. Provide sufficient air exchange and/or exhaust in work rooms. Container may be opened only under exhaust ventilation hood. Open drum carefully as content may be under pressure. Dispose of rinse water in accordance with local and national regulations.

Electrostatic charge may accumulate and create a hazardous condition when handling this material. To minimize this hazard, bonding and grounding may be necessary, but may not by themselves be sufficient. Review all operations, which have the potential to generating and accumulation of electrostatic charge and/or a flammable atmosphere (including tank and container filling, splash filling, tank cleaning, sampling, gauging, switch loading, filtering, mixing, agitation, and vacuum truck operations) and use appropriate mitigating procedures. For more information, refer to OSHA Standard 29 CFR 1910.106 "Flammable and Combustible Liquids"; National Fire Protection Association (NFPA 77), "Recommended Practice on Static Electricity"; and/or the American Petroleum Institute (API) Recommended Practice 2003, "Protection Against Ignitions Arising Out of Static, Lightning, and stray Currents".

Avoid formation of aerosol. Do not breathe vapors/dust. Avoid exposure - obtain special instructions before use. Avoid contact with skin and eyes. For personal protection see section 8. Smoking, eating and drinking should be prohibited in the application area. Take precautionary measures against static discharges. Provide sufficient air exchange and/or exhaust in work rooms. Container may be opened only under exhaust ventilation hood. Open drum carefully as content may be under pressure. Dispose of rinse water in accordance with local and national regulations.

Advice on protection against fire and explosion : Do not spray on an open flame or any other incandescent material. Take necessary action to avoid static electricity discharge (which might cause ignition of organic vapors). Use only explosion-proof equipment. Keep away from open flames, hot surfaces and sources of ignition.

**Storage**

Requirements for storage areas and containers : No smoking. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Observe label precautions. Electrical installations / working materials must comply with the technological safety standards.

**SECTION 8: Exposure controls/personal protection****Ingredients with workplace control parameters**

**Benzene**

Version 1.9

Revision Date 2016-01-08

**US**

Ingredients	Basis	Value	Control parameters	Note
Benzene	ACGIH	TWA	0.5 ppm,	BEI, A1, Skin,
	ACGIH	STEL	2.5 ppm,	BEI, A1, Skin,
	OSHA Z-1-A	TWA	1 ppm,	
	OSHA Z-1-A	CEIL	5 ppm,	
	OSHA Z-2	Peak	50 ppm,	(a),
	OSHA 29 CFR 1910.1028(c)	TWA	1 ppm,	
	OSHA 29 CFR 1910.1028(c)	STEL	5 ppm,	
	OSHA CARC	PEL	1 ppm,	
	OSHA CARC	STEL	5 ppm,	

(a) This standard applies to the industry segments exempt from the 1 ppm 8-hour TWA and 5 ppm STEL of the benzene standard at 1910.1028.

A1 Confirmed human carcinogen

BEI Substances for which there is a Biological Exposure Index or Indices (see BEI® section)

Skin Danger of cutaneous absorption

**Immediately Dangerous to Life or Health Concentrations (IDLH)**

Substance name	CAS-No.	Control parameters	Update
Benzene	71-43-2	Immediately Dangerous to Life or Health Concentration Value 500 ppm	1995-03-01

**Engineering measures**

Adequate ventilation to control airborne concentrations below the exposure guidelines/limits. Consider the potential hazards of this material (see Section 2), applicable exposure limits, job activities, and other substances in the work place when designing engineering controls and selecting personal protective equipment. If engineering controls or work practices are not adequate to prevent exposure to harmful levels of this material, the personal protective equipment listed below is recommended. The user should read and understand all instructions and limitations supplied with the equipment since protection is usually provided for a limited time or under certain circumstances.

**Personal protective equipment**

- Respiratory protection : Wear a supplied-air NIOSH approved respirator unless ventilation or other engineering controls are adequate to maintain minimal oxygen content of 19.5% by volume under normal atmospheric pressure. Wear a NIOSH approved respirator that provides protection when working with this material if exposure to harmful levels of airborne material may occur, such as: Air-Purifying Respirator for Organic Vapors. Use a positive pressure, air-supplying respirator if there is potential for uncontrolled release, exposure levels are not known, or other circumstances where air-purifying respirators may not provide adequate protection.
- Hand protection : The suitability for a specific workplace should be discussed with the producers of the protective gloves. Please observe the instructions regarding permeability and breakthrough time which are provided by the supplier of the gloves. Also take into consideration the specific local conditions under which the product is used, such as the danger of cuts, abrasion, and the contact time. Gloves should be discarded and replaced if there is any indication of degradation or chemical breakthrough.
- Eye protection : Eye wash bottle with pure water. Tightly fitting safety goggles.
- Skin and body protection : Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place. Wear as appropriate: Flame retardant

**Benzene**

Version 1.9

Revision Date 2016-01-08

antistatic protective clothing. Workers should wear antistatic footwear.

Hygiene measures : When using do not eat or drink. When using do not smoke. Wash hands before breaks and at the end of workday.

**SECTION 9: Physical and chemical properties****Information on basic physical and chemical properties****Appearance**

Physical state : Liquid  
 Color : Clear, Colorless  
 Odor : sweet, distinct

**Safety data**

Flash point : -11 °C (12 °F)  
 Method: Tag closed cup

Lower explosion limit : 1.2 %(V)

Upper explosion limit : 7.8 %(V)

Oxidizing properties : no

Autoignition temperature : 498 °C (928 °F)

Molecular formula : C<sub>6</sub>H<sub>6</sub>

Molecular weight : 78.12 g/mol

pH : Not applicable

Pour point : No data available

Boiling point/boiling range : 80 °C (176 °F)

Vapor pressure : 75.00 MMHG  
 at 20 °C (68 °F)

Relative density : 0.88  
 at 25 °C (77 °F)

Water solubility : 1.88 g/l  
 at 23.5 °C (74.3 °F)

Partition coefficient: n-  
 octanol/water : log Pow: 2.13

Relative vapor density : 2.77  
 (Air = 1.0)

Evaporation rate : 2.8

Percent volatile : > 99 %

**Other information**

SDS Number:100000068511

7/14

**Benzene**

Version 1.9

Revision Date 2016-01-08

Conductivity : < 50 pSm  
at 20 °C

**SECTION 10: Stability and reactivity**

Reactivity : No decomposition if stored and applied as directed.

Chemical stability : This material is considered stable under normal ambient and anticipated storage and handling conditions of temperature and pressure.  
No decomposition if stored and applied as directed.

**Possibility of hazardous reactions**

Conditions to avoid : Heat, flames and sparks.

Materials to avoid : May react with oxygen and strong oxidizing agents, such as chlorates, nitrates, peroxides, etc.

Hazardous decomposition products : No data available

Other data : No decomposition if stored and applied as directed.

**SECTION 11: Toxicological information****Acute oral toxicity**

Benzene : LD50: > 2,000 mg/kg  
Species: Rat  
Sex: female

**Acute inhalation toxicity**

Benzene : LC50: 44.5 mg/l  
Exposure time: 4 h  
Species: Rat  
Sex: Not Specified  
Test atmosphere: vapor

**Acute dermal toxicity**

Benzene : LD50: > 8,260 mg/kg  
Species: Rabbit

**Benzene**

**Skin irritation** : May cause skin irritation in susceptible persons.

**Benzene**

**Eye irritation** : May cause irreversible eye damage.

**Sensitization**

**Benzene**

Version 1.9

Revision Date 2016-01-08

Benzene : Did not cause sensitization on laboratory animals.

**Repeated dose toxicity**

Benzene : Species: Rat, female  
Sex: female  
Application Route: oral gavage  
Dose: 0, 25, 50, 100 mg/kg  
Exposure time: 103 wk  
Number of exposures: 5 d/wk  
NOEL: < 25 mg/kg  
Lowest observable effect level: 25 mg/kg

Species: Rat, male  
Sex: male  
Application Route: oral gavage  
Dose: 0, 50, 100, 200 mg/kg  
Exposure time: 103 wk  
Number of exposures: 5 d/wk  
NOEL: < 50 mg/kg  
Lowest observable effect level: 50 mg/kg

Species: Mouse  
Application Route: oral gavage  
Dose: 0, 25, 50, 100 mg/kg  
Exposure time: 103 wk  
NOEL: < 25 mg/kg

**Carcinogenicity**

Benzene : Species: Rat  
Sex: female  
Dose: 0, 25, 50, 250 mg/kg  
Exposure time: 103 wks  
Number of exposures: daily, 5 days/week  
Test substance: yes  
Remarks: zymbal gland carcinomas, squamous cell papillomas

Species: Rat  
Sex: male  
Dose: 0, 50, 100, 200 mg/kg  
Exposure time: 103 wks  
Number of exposures: daily, 5 days/week  
Test substance: yes  
Remarks: zymbal gland carcinomas, squamous cell papillomas

Species: Mouse  
Sex: male and female  
Dose: 25, 50, 100 mg/kg  
Exposure time: 103 wks  
Number of exposures: daily, 5 days/week  
Test substance: yes  
Remarks: Clear evidence of multiple organ carcinogenicity.

**Benzene  
Aspiration toxicity** : May be fatal if swallowed and enters airways.

**Benzene**

Version 1.9

Revision Date 2016-01-08

Substances known to cause human aspiration toxicity hazards or to be regarded as if they cause human aspiration toxicity hazard.

**CMR effects**

**Benzene** : Carcinogenicity: Human carcinogen.  
 Mutagenicity: In vivo tests showed mutagenic effects  
 Teratogenicity: Did not show teratogenic effects in animal experiments.  
 Reproductive toxicity: Animal testing did not show any effects on fertility.

**Benzene****Further information**

: Chronic Health Hazard.  
 Solvents may degrease the skin.

**SECTION 12: Ecological information****Toxicity to fish**

**Benzene** : LC50: 5.3 mg/l  
 Exposure time: 96 h  
 Species: Oncorhynchus mykiss (rainbow trout)  
 flow-through test Test substance: yes  
 Method: OECD Test Guideline 203

**Toxicity to daphnia and other aquatic invertebrates**

**Benzene** : EC50: 10 mg/l  
 Exposure time: 48 h  
 Species: Daphnia magna (Water flea)  
 static test Test substance: yes  
 Method: OECD Test Guideline 202

**Toxicity to algae**

**Benzene** : ErC50: 100 mg/l  
 Exposure time: 72 h  
 Species: Pseudokirchneriella subcapitata (green algae)  
 Test substance: yes  
 Method: OECD Test Guideline 201

Elimination information (persistence and degradability)

**Biodegradability** : This material is expected to be readily biodegradable.

**Ecotoxicology Assessment**

Acute aquatic toxicity

**Benzene** : Toxic to aquatic life.

Chronic aquatic toxicity

**Benzene** : Harmful to aquatic life with long lasting effects.

**Benzene**

Version 1.9

Revision Date 2016-01-08

## Results of PBT assessment

Benzene : This substance is not considered to be persistent, bioaccumulating and toxic (PBT)., This substance is not considered to be very persistent and very bioaccumulating (vPvB).

## Additional ecological information

: Toxic to aquatic life.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal., Toxic to aquatic life.

**SECTION 13: Disposal considerations**

The information in this SDS pertains only to the product as shipped.

Use material for its intended purpose or recycle if possible. This material, if it must be discarded, may meet the criteria of a hazardous waste as defined by US EPA under RCRA (40 CFR 261) or other State and local regulations. Measurement of certain physical properties and analysis for regulated components may be necessary to make a correct determination. If this material is classified as a hazardous waste, federal law requires disposal at a licensed hazardous waste disposal facility.

Product : The product should not be allowed to enter drains, water courses or the soil. Do not contaminate ponds, waterways or ditches with chemical or used container. Send to a licensed waste management company.

Contaminated packaging : Empty remaining contents. Dispose of as unused product. Do not re-use empty containers. Do not burn, or use a cutting torch on, the empty drum.

**SECTION 14: Transport information**

**The shipping descriptions shown here are for bulk shipments only, and may not apply to shipments in non-bulk packages (see regulatory definition).**

Consult the appropriate domestic or international mode-specific and quantity-specific Dangerous Goods Regulations for additional shipping description requirements (e.g., technical name or names, etc.) Therefore, the information shown here, may not always agree with the bill of lading shipping description for the material. Flashpoints for the material may vary slightly between the SDS and the bill of lading.

**US DOT (UNITED STATES DEPARTMENT OF TRANSPORTATION)**  
UN1114, BENZENE, 3, II, RQ (BENZENE)

**IMO / IMDG (INTERNATIONAL MARITIME DANGEROUS GOODS)**  
UN1114, BENZENE, 3, II, (-11 °C)

**IATA (INTERNATIONAL AIR TRANSPORT ASSOCIATION)**  
UN1114, BENZENE, 3, II

**ADR (AGREEMENT ON DANGEROUS GOODS BY ROAD (EUROPE))**

**Benzene**

Version 1.9

Revision Date 2016-01-08

UN1114, BENZENE, 3, II, (D/E)

**RID (REGULATIONS CONCERNING THE INTERNATIONAL TRANSPORT OF DANGEROUS GOODS (EUROPE))**

UN1114, BENZENE, 3, II

**ADN (EUROPEAN AGREEMENT CONCERNING THE INTERNATIONAL CARRIAGE OF DANGEROUS GOODS BY INLAND WATERWAYS)**

UN1114, BENZENE, 3, II

**Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code**

<b>Other information</b>	<b>: Benzene and mixtures having 10% Benzene or more, S.T. 3, Cat.Y</b>
--------------------------	---

**SECTION 15: Regulatory information****National legislation**

CERCLA Reportable Quantity : 10 lbs  
Benzene

SARA 302 Reportable Quantity : This material does not contain any components with a SARA 302 RQ.

SARA 302 Threshold Planning Quantity : No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 304 Reportable Quantity : This material does not contain any components with a section 304 EHS RQ.

SARA 313 Ingredients : The following components are subject to reporting levels established by SARA Title III, Section 313:

: Benzene - 71-43-2

**Clean Air Act**

Ozone-Depletion Potential : This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).

The following chemical(s) are listed as HAP under the U.S. Clean Air Act, Section 12 (40 CFR 61):

**Benzene**

Version 1.9

Revision Date 2016-01-08

: Benzene - 71-43-2

This product does not contain any chemicals listed under the U.S. Clean Air Act Section 112(r) for Accidental Release Prevention (40 CFR 68.130, Subpart F).

The following chemical(s) are listed under the U.S. Clean Air Act Section 111 SOCM I Intermediate or Final VOC's (40 CFR 60.489):

: Benzene - 71-43-2

**US State Regulations**

Pennsylvania Right To Know

: Benzene - 71-43-2

New Jersey Right To Know

: Benzene - 71-43-2


California Prop. 65  
Ingredients

: WARNING! This product contains a chemical known in the State of California to cause cancer.

WARNING: This product contains a chemical known in the State of California to cause birth defects or other reproductive harm.

**Notification status**

Europe REACH	:	On the inventory, or in compliance with the inventory
United States of America TSCA	:	On the inventory, or in compliance with the inventory
Canada DSL	:	On the inventory, or in compliance with the inventory
Australia AICS	:	On the inventory, or in compliance with the inventory
New Zealand NZIoC	:	On the inventory, or in compliance with the inventory
Japan ENCS	:	On the inventory, or in compliance with the inventory
Korea KECI	:	On the inventory, or in compliance with the inventory
Philippines PICCS	:	On the inventory, or in compliance with the inventory
China IECSC	:	On the inventory, or in compliance with the inventory

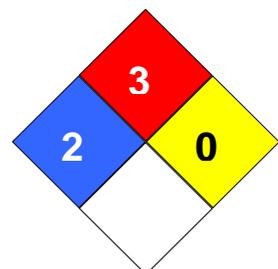**SECTION 16: Other information****NFPA Classification**: Health Hazard: 2  
Fire Hazard: 3  
Reactivity Hazard: 0

**Benzene**

Version 1.9

Revision Date 2016-01-08

**Further information**

Legacy SDS Number : CPC00091

Significant changes since the last version are highlighted in the margin. This version replaces all previous versions.

The information in this SDS pertains only to the product as shipped.

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Key or legend to abbreviations and acronyms used in the safety data sheet			
ACGIH	American Conference of Government Industrial Hygienists	LD50	Lethal Dose 50%
AICS	Australia, Inventory of Chemical Substances	LOAEL	Lowest Observed Adverse Effect Level
DSL	Canada, Domestic Substances List	NFPA	National Fire Protection Agency
NDSL	Canada, Non-Domestic Substances List	NIOSH	National Institute for Occupational Safety & Health
CNS	Central Nervous System	NTP	National Toxicology Program
CAS	Chemical Abstract Service	NZIoC	New Zealand Inventory of Chemicals
EC50	Effective Concentration	NOAEL	No Observable Adverse Effect Level
EC50	Effective Concentration 50%	NOEC	No Observed Effect Concentration
EGEST	EOSCA Generic Exposure Scenario Tool	OSHA	Occupational Safety & Health Administration
EOSCA	European Oilfield Specialty Chemicals Association	PEL	Permissible Exposure Limit
EINECS	European Inventory of Existing Chemical Substances	PICCS	Philippines Inventory of Commercial Chemical Substances
MAK	Germany Maximum Concentration Values	PRNT	Presumed Not Toxic
GHS	Globally Harmonized System	RCRA	Resource Conservation Recovery Act
>=	Greater Than or Equal To	STEL	Short-term Exposure Limit
IC50	Inhibition Concentration 50%	SARA	Superfund Amendments and Reauthorization Act.
IARC	International Agency for Research on Cancer	TLV	Threshold Limit Value
IECSC	Inventory of Existing Chemical Substances in China	TWA	Time Weighted Average
ENCS	Japan, Inventory of Existing and New Chemical Substances	TSCA	Toxic Substance Control Act
KECI	Korea, Existing Chemical Inventory	UVCB	Unknown or Variable Composition, Complex Reaction Products, and Biological Materials
<=	Less Than or Equal To	WHMIS	Workplace Hazardous Materials Information System
LC50	Lethal Concentration 50%		

**1 Identification**

- **Product identifier**
- **Product Name:** Perfluoro-n-octane Sulfonate (PFOS)
- **Part Number:** LCS-4951
- **Application of the substance / the mixture** Certified Reference Material
- **Details of the supplier of the safety data sheet**
- **Manufacturer/Supplier:**  
SPEX CertiPrep, LLC.  
203 Norcross Ave, Metuchen,  
NJ 08840 USA
- **Information department:** product safety department
- **Emergency telephone number:**  
Emergency Phone Number (24 hours)  
CHEMTREC (800-424-9300)  
Outside US: 703-527-3887

**2 Hazard(s) identification**

- **Classification of the substance or mixture**



GHS02 Flame

Flam. Liq. 2 H225 Highly flammable liquid and vapor.



GHS06 Skull and crossbones

Acute Tox. 3 H331 Toxic if inhaled.



GHS08 Health hazard

Carc. 2 H351 Suspected of causing cancer.

Repr. 1 H360-H362 May damage fertility or the unborn child. May cause harm to breast-fed children.

STOT SE 1 H370 Causes damage to organs.

- **Label elements**

- **GHS label elements** The product is classified and labeled according to the Globally Harmonized System (GHS).

- **Hazard pictograms**



GHS02



GHS06



GHS08

- **Signal word** Danger

- **Hazard-determining components of labeling:**

methanol

perfluorooctane sulfonic acid

- **Hazard statements**

H225 Highly flammable liquid and vapor.

H331 Toxic if inhaled.

H351 Suspected of causing cancer.

H360-H362 May damage fertility or the unborn child. May cause harm to breast-fed children.

H370 Causes damage to organs.

- **Precautionary statements**

Avoid contact during pregnancy/while nursing.

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

Use explosion-proof electrical/ventilating/lighting/equipment.

If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.

Store locked up.

Dispose of contents/container in accordance with local/regional/national/international regulations.

(Contd. on page 2)

**Safety Data Sheet**  
acc. to OSHA HCS

Printing date 12/13/2016

Reviewed on 12/13/2016

**Product Name: Perfluoro-n-octane Sulfonate (PFOS)**

(Contd. of page 1)

- **Classification system:**
- **NFPA ratings (scale 0 - 4)**



- **HMIS-ratings (scale 0 - 4)**



- **Other hazards**
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.

### 3 Composition/information on ingredients

- **Chemical characterization: Mixtures**
- **Description:** Mixture of the substances listed below with nonhazardous additions.

- **Dangerous components:**

67-56-1	methanol	99.9%
1763-23-1	perfluorooctane sulfonic acid	0.1%

### 4 First-aid measures

- **Description of first aid measures**
- **General information:**  
Immediately remove any clothing soiled by the product.  
Remove breathing apparatus only after contaminated clothing have been completely removed.  
In case of irregular breathing or respiratory arrest provide artificial respiration.
- **After inhalation:**  
Supply fresh air or oxygen; call for doctor.  
In case of unconsciousness place patient stably in side position for transportation.
- **After skin contact:** Immediately wash with water and soap and rinse thoroughly.
- **After eye contact:** Rinse opened eye for several minutes under running water. Then consult a doctor.
- **After swallowing:** Do not induce vomiting; immediately call for medical help.
- **Information for Doctor:**
- **Most important symptoms and effects, both acute and delayed** No further relevant information available.
- **Indication of any immediate medical attention and special treatment needed** No further relevant information available.

### 5 Fire-fighting measures

- **Extinguishing media**
- **Suitable extinguishing agents:** CO<sub>2</sub>, sand, extinguishing powder. Do not use water.
- **For safety reasons unsuitable extinguishing agents:** Water with full jet
- **Special hazards arising from the substance or mixture** No further relevant information available.
- **Advice for firefighters**
- **Protective equipment:** Mouth respiratory protective device.

### 6 Accidental release measures

- **Personal precautions, protective equipment and emergency procedures** Wear protective equipment. Keep unprotected persons away.
- **Environmental precautions:**  
Do not allow product to reach sewage system or any water course.  
Inform respective authorities in case of seepage into water course or sewage system.  
Do not allow to enter sewers/ surface or ground water.
- **Methods and material for containment and cleaning up:**  
Absorb with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust).  
Dispose contaminated material as waste according to item 13.  
Ensure adequate ventilation.  
Do not flush with water or aqueous cleansing agents

(Contd. on page 3)

**Product Name: Perfluoro-n-octane Sulfonate (PFOS)**

(Contd. of page 2)

- **Reference to other sections**  
See Section 7 for information on safe handling.  
See Section 8 for information on personal protection equipment.  
See Section 13 for disposal information.

## 7 Handling and storage

- **Handling:**
- **Precautions for safe handling**  
Ensure good ventilation/exhaustion at the workplace.  
Open and handle receptacle with care.  
Prevent formation of aerosols.
- **Information about protection against explosions and fires:**  
Keep ignition sources away - Do not smoke.  
Protect against electrostatic charges.  
Keep respiratory protective device available.
- **Conditions for safe storage, including any incompatibilities**
- **Storage:**
- **Requirements to be met by storerooms and receptacles:** Store in a cool location.
- **Information about storage in one common storage facility:** Not required.
- **Further information about storage conditions:**  
Keep receptacle tightly sealed.  
Store in cool, dry conditions in well sealed receptacles.
- **Specific end use(s)** No further relevant information available.

## 8 Exposure controls/personal protection

- **Additional information about design of technical systems:** No further data; see item 7.
- **Control parameters**
- **Components with limit values that require monitoring at the workplace:**  
The following constituent is the only constituent of the product which has a PEL, TLV or other recommended exposure limit.  
At this time, the remaining constituent has no known exposure limits.

### 67-56-1 methanol

PEL	Long-term value: 260 mg/m <sup>3</sup> , 200 ppm
REL	Short-term value: 325 mg/m <sup>3</sup> , 250 ppm Long-term value: 260 mg/m <sup>3</sup> , 200 ppm Skin
TLV	Short-term value: 328 mg/m <sup>3</sup> , 250 ppm Long-term value: 262 mg/m <sup>3</sup> , 200 ppm Skin; BEI

- **Ingredients with biological limit values:**

### 67-56-1 methanol

BEI	15 mg/L Medium: urine Time: end of shift Parameter: Methanol (background, nonspecific)
-----	---

- **Additional information:** The lists that were valid during the creation were used as basis.
- **Exposure controls**
- **Personal protective equipment:**
- **General protective and hygienic measures:**  
Keep away from foodstuffs, beverages and feed.  
Immediately remove all soiled and contaminated clothing.  
Wash hands before breaks and at the end of work.  
Store protective clothing separately.  
Avoid contact with the eyes and skin.
- **Breathing equipment:**  
In case of brief exposure or low pollution use respiratory filter device. In case of intensive or longer exposure use respiratory protective device that is independent of circulating air.
- **Protection of hands:**



Protective gloves

(Contd. on page 4)

**Safety Data Sheet**  
acc. to OSHA HCS

Printing date 12/13/2016

Reviewed on 12/13/2016

**Product Name: Perfluoro-n-octane Sulfonate (PFOS)**

(Contd. of page 3)

The glove material has to be impermeable and resistant to the product/ the substance/ the preparation.

Due to missing tests no recommendation to the glove material can be given for the product/ the preparation/ the chemical mixture.

Selection of the glove material on consideration of the penetration times, rates of diffusion and the degradation

· **Material of gloves**

The selection of the suitable gloves does not only depend on the material, but also on further marks of quality and varies from manufacturer to manufacturer. As the product is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application.

· **Penetration time of glove material**

The exact break through time has to be found out by the manufacturer of the protective gloves and has to be observed.

· **Eye protection:**



Tightly sealed goggles

## 9 Physical and chemical properties

· **Information on basic physical and chemical properties**

· **General Information**

· **Appearance:**

· <b>Form:</b>	Liquid
· <b>Color:</b>	According to product specification
· <b>Odor:</b>	Characteristic
· <b>Odour Threshold:</b>	Not applicable.

· **pH-value:** Not applicable.

· **Change in condition**

· <b>Melting point/Melting range:</b>	Undetermined.
· <b>Boiling point/Boiling range:</b>	64 °C (147 °F)

· **Flash point:** 11 °C (52 °F)

· **Flammability (solid, gaseous):** Not applicable.

· **Ignition temperature:** 455 °C (851 °F)

· **Decomposition temperature:** Not applicable.

· **Auto igniting:** Product is not selfigniting.

· **Danger of explosion:** Product is not explosive. However, formation of explosive air/vapor mixtures are possible.

· **Explosion limits:**

· <b>Lower:</b>	5.5 Vol %
· <b>Upper:</b>	44.0 Vol %

· **Vapor pressure at 20 °C (68 °F):** 128 hPa (96 mm Hg)

· **Density at 20 °C (68 °F)** 0.79 g/cm<sup>3</sup> (6.593 lbs/gal)

· **Relative density** Not applicable.

· **Vapor density** Not applicable.

· **Evaporation rate** Not applicable.

· **Solubility in / Miscibility with**

· **Water:** Not miscible or difficult to mix.

· **Partition coefficient (n-octanol/water):** Not applicable.

· **Viscosity:**

· <b>Dynamic:</b>	Not applicable.
· <b>Kinematic:</b>	Not applicable.

· **Solvent content:**

· <b>Organic solvents:</b>	99.9 %
· <b>VOC content:</b>	99.9 %

· **Solids content:** 0.1 %

· **Other information** No further relevant information available.

## 10 Stability and reactivity

· **Reactivity** No further relevant information available.

(Contd. on page 5)

**Safety Data Sheet**  
acc. to OSHA HCS

Printing date 12/13/2016

Reviewed on 12/13/2016

**Product Name: Perfluoro-n-octane Sulfonate (PFOS)**

(Contd. of page 4)

- **Chemical stability**
- **Thermal decomposition / conditions to be avoided:** No decomposition if used according to specifications.
- **Possibility of hazardous reactions** No dangerous reactions known.
- **Conditions to avoid** No further relevant information available.
- **Incompatible materials:** No further relevant information available.
- **Hazardous decomposition products:** No dangerous decomposition products known.

### 11 Toxicological information

- **Information on toxicological effects**
- **Acute toxicity:**

· **LD/LC50 values that are relevant for classification:**

**67-56-1 methanol**

Oral	LD50	5628 mg/kg (rat)
Dermal	LD50	15800 mg/kg (rabbit)

- **Primary irritant effect:**
- **on the skin:** No irritant effect.
- **on the eye:** No irritating effect.
- **Sensitization:** No sensitizing effects known.
- **Additional toxicological information:**  
The product shows the following dangers according to internally approved calculation methods for preparations:  
Toxic

· **Carcinogenic categories**

· **IARC (International Agency for Research on Cancer)**

None of the ingredients is listed.

· **NTP (National Toxicology Program)**

None of the ingredients is listed.

· **OSHA-Ca (Occupational Safety & Health Administration)**

None of the ingredients is listed.

### 12 Ecological information

- **Toxicity**
- **Aquatic toxicity:** No further relevant information available.
- **Persistence and degradability** No further relevant information available.
- **Behavior in environmental systems:**
- **Bioaccumulative potential** No further relevant information available.
- **Mobility in soil** No further relevant information available.
- **Additional ecological information:**
- **General notes:**  
Water hazard class 1 (Self-assessment): slightly hazardous for water  
Do not allow undiluted product or large quantities of it to reach ground water, water course or sewage system.
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.
- **Other adverse effects** No further relevant information available.

### 13 Disposal considerations

- **Waste treatment methods**
- **Recommendation:** Must not be disposed of together with household garbage. Do not allow product to reach sewage system.
- **Uncleaned packagings:**
- **Recommendation:** Disposal must be made according to official regulations.

### 14 Transport information

- **UN-Number**
- **DOT, ADR, IMDG, IATA** UN1230
- **UN proper shipping name**
- **DOT** Methanol

(Contd. on page 6)

**Safety Data Sheet**  
acc. to OSHA HCS

Printing date 12/13/2016

Reviewed on 12/13/2016

**Product Name: Perfluoro-n-octane Sulfonate (PFOS)**

(Contd. of page 5)

<ul style="list-style-type: none"> <li>· ADR</li> <li>· IMDG, IATA</li> </ul>	1230 Methanol METHANOL
<ul style="list-style-type: none"> <li>· Transport hazard class(es)</li> <li>· DOT</li> </ul>	
<ul style="list-style-type: none"> <li>· Class</li> <li>· Label</li> </ul>	3 Flammable liquids 3, 6.1
<ul style="list-style-type: none"> <li>· ADR</li> </ul>	
<ul style="list-style-type: none"> <li>· Class</li> <li>· Label</li> </ul>	3 Flammable liquids 3+6.1
<ul style="list-style-type: none"> <li>· IMDG</li> </ul>	
<ul style="list-style-type: none"> <li>· Class</li> <li>· Label</li> </ul>	3 Flammable liquids 3/6.1
<ul style="list-style-type: none"> <li>· IATA</li> </ul>	
<ul style="list-style-type: none"> <li>· Class</li> <li>· Label</li> </ul>	3 Flammable liquids 3 (6.1)
<ul style="list-style-type: none"> <li>· Packing group</li> <li>· DOT, ADR, IMDG, IATA</li> </ul>	II
<ul style="list-style-type: none"> <li>· Environmental hazards:</li> </ul>	Not applicable.
<ul style="list-style-type: none"> <li>· Special precautions for user</li> <li>· Danger code (Kemler):</li> <li>· EMS Number:</li> <li>· Stowage Category</li> <li>· Stowage Code</li> </ul>	Warning: Flammable liquids 336 F-E,S-D B SW2 Clear of living quarters.
<ul style="list-style-type: none"> <li>· Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code</li> </ul>	Not applicable.
<ul style="list-style-type: none"> <li>· Transport/Additional information:</li> </ul>	
<ul style="list-style-type: none"> <li>· ADR</li> <li>· Excepted quantities (EQ)</li> </ul>	Code: E2 Maximum net quantity per inner packaging: 30 ml Maximum net quantity per outer packaging: 500 ml
<ul style="list-style-type: none"> <li>· IMDG</li> <li>· Limited quantities (LQ)</li> <li>· Excepted quantities (EQ)</li> </ul>	1L Code: E2 Maximum net quantity per inner packaging: 30 ml Maximum net quantity per outer packaging: 500 ml
<ul style="list-style-type: none"> <li>· UN "Model Regulation":</li> </ul>	UN 1230 METHANOL, 3 (6.1), II

US

(Contd. on page 7)

Product Name: Perfluoro-n-octane Sulfonate (PFOS)

(Contd. of page 6)

**15 Regulatory information**

- Safety, health and environmental regulations/legislation specific for the substance or mixture
- Sara

## · Section 355 (extremely hazardous substances):

None of the ingredients is listed.

## · Section 313 (Specific toxic chemical listings):

67-56-1 methanol

## · TSCA (Toxic Substances Control Act):

All ingredients are listed.

## · Proposition 65

## · Chemicals known to cause cancer:

None of the ingredients is listed.

## · Chemicals known to cause reproductive toxicity for females:

None of the ingredients is listed.

## · Chemicals known to cause reproductive toxicity for males:

None of the ingredients is listed.

## · Chemicals known to cause developmental toxicity:

67-56-1 methanol

## · Carcinogenic categories

## · EPA (Environmental Protection Agency)

None of the ingredients is listed.

## · TLV (Threshold Limit Value established by ACGIH)

None of the ingredients is listed.

## · NIOSH-Ca (National Institute for Occupational Safety and Health)

None of the ingredients is listed.

## · Protective Action Criteria for Chemicals

## · PAC-1:

67-56-1 methanol

530 ppm

## · PAC-2:

67-56-1 methanol

2,100 ppm

## · PAC-3:

67-56-1 methanol

7200\* ppm

- GHS label elements The product is classified and labeled according to the Globally Harmonized System (GHS).

## · Hazard pictograms



GHS02



GHS06



GHS08

- Signal word Danger

## · Hazard-determining components of labeling:

methanol

perfluorooctane sulfonic acid

## · Hazard statements

H225 Highly flammable liquid and vapor.

H331 Toxic if inhaled.

H351 Suspected of causing cancer.

H360-H362 May damage fertility or the unborn child. May cause harm to breast-fed children.

H370 Causes damage to organs.

## · Precautionary statements

Avoid contact during pregnancy/while nursing.

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

Use explosion-proof electrical/ventilating/lighting/equipment.

If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.

Store locked up.

Dispose of contents/container in accordance with local/regional/national/international regulations.

(Contd. on page 8)

**Safety Data Sheet**  
acc. to OSHA HCS

Printing date 12/13/2016

Reviewed on 12/13/2016

**Product Name: Perfluoro-n-octane Sulfonate (PFOS)**

(Contd. of page 7)

· **Chemical safety assessment:** A Chemical Safety Assessment has not been carried out.

### 16 Other information

*This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.*

· **Department issuing SDS:** product safety department

· **Contact:**

SPEX CertiPrep, LLC.

1-732-549-7144

· **Date of preparation / last revision** 12/13/2016 / -

· **Abbreviations and acronyms:**

ADR: Accord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning the International Carriage of Dangerous Goods by Road)

IMDG: International Maritime Code for Dangerous Goods

DOT: US Department of Transportation

IATA: International Air Transport Association

ACGIH: American Conference of Governmental Industrial Hygienists

EINECS: European Inventory of Existing Commercial Chemical Substances

ELINCS: European List of Notified Chemical Substances

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA)

HMIS: Hazardous Materials Identification System (USA)

VOC: Volatile Organic Compounds (USA, EU)

LCS0: Lethal concentration, 50 percent

LD50: Lethal dose, 50 percent

PBT: Persistent, Bioaccumulative and Toxic

vPvB: very Persistent and very Bioaccumulative

NIOSH: National Institute for Occupational Safety

OSHA: Occupational Safety & Health

TLV: Threshold Limit Value

PEL: Permissible Exposure Limit

REL: Recommended Exposure Limit

BEI: Biological Exposure Limit

Flam. Liq. 2: Flammable liquids – Category 2

Acute Tox. 3: Acute toxicity – Category 3

Carc. 2: Carcinogenicity – Category 2

Repr. 1: Reproductive toxicity – Category 1

STOT SE 1: Specific target organ toxicity (single exposure) – Category 1

US

## SAFETY DATA SHEET

Creation Date 10-Dec-2009

Revision Date 23-Jan-2018

Revision Number 5

### 1. Identification

**Product Name** Tetrachloroethylene

**Cat No. :** AC445690000; ACR445690010; AC445690025; AC445691000

**CAS-No** 127-18-4  
**Synonyms** Perchloroethylene

**Recommended Use** Laboratory chemicals.  
**Uses advised against** Food, drug, pesticide or biocidal product use.  
**Details of the supplier of the safety data sheet**

**Company**

Fisher Scientific  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

Acros Organics  
One Reagent Lane  
Fair Lawn, NJ 07410

**Emergency Telephone Number**

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11  
Emergency Number **US**:001-201-796-7100 / **Europe**: +32 14 57 52 99  
**CHEMTREC** Tel. No.**US**:001-800-424-9300 / **Europe**:001-703-527-3887

### 2. Hazard(s) identification

**Classification**

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin Corrosion/Irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Skin Sensitization	Category 1
Carcinogenicity	Category 1B
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Central nervous system (CNS).	
Specific target organ toxicity - (repeated exposure)	Category 2
Target Organs - Kidney, Liver, Blood.	

**Label Elements**

**Signal Word**  
Danger

**Hazard Statements**

Causes skin irritation  
 Causes serious eye irritation  
 May cause an allergic skin reaction  
 May cause drowsiness or dizziness  
 May cause cancer  
 May cause damage to organs through prolonged or repeated exposure



### Precautionary Statements

#### Prevention

Obtain special instructions before use  
 Do not handle until all safety precautions have been read and understood  
 Use personal protective equipment as required  
 Wash face, hands and any exposed skin thoroughly after handling  
 Contaminated work clothing should not be allowed out of the workplace  
 Do not breathe dust/fume/gas/mist/vapors/spray  
 Use only outdoors or in a well-ventilated area  
 Wear protective gloves/protective clothing/eye protection/face protection

#### Response

IF exposed or concerned: Get medical attention/advice

#### Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

#### Skin

IF ON SKIN: Wash with plenty of soap and water  
 Take off contaminated clothing and wash before reuse  
 If skin irritation or rash occurs: Get medical advice/attention

#### Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing  
 If eye irritation persists: Get medical advice/attention

#### Storage

Store locked up  
 Store in a well-ventilated place. Keep container tightly closed

#### Disposal

Dispose of contents/container to an approved waste disposal plant

#### Hazards not otherwise classified (HNOC)

Toxic to aquatic life with long lasting effects  
 WARNING. Cancer - <https://www.p65warnings.ca.gov/>.

## 3. Composition/Information on Ingredients

Component	CAS-No	Weight %
Tetrachloroethylene	127-18-4	>95

## 4. First-aid measures

#### General Advice

If symptoms persist, call a physician.

#### Eye Contact

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get medical attention.

#### Skin Contact

Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists,

	call a physician.
<b>Inhalation</b>	Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if symptoms occur.
<b>Ingestion</b>	Clean mouth with water and drink afterwards plenty of water.
<b>Most important symptoms and effects</b>	None reasonably foreseeable. May cause allergic skin reaction. Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting: Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing
<b>Notes to Physician</b>	Treat symptomatically

## 5. Fire-fighting measures

<b>Suitable Extinguishing Media</b>	Water spray, carbon dioxide (CO <sub>2</sub> ), dry chemical, alcohol-resistant foam.
<b>Unsuitable Extinguishing Media</b>	No information available
<b>Flash Point</b>	No information available
<b>Method -</b>	No information available
<b>Autoignition Temperature</b>	No information available
<b>Explosion Limits</b>	
<b>Upper</b>	No data available
<b>Lower</b>	No data available
<b>Sensitivity to Mechanical Impact</b>	No information available
<b>Sensitivity to Static Discharge</b>	No information available

### Specific Hazards Arising from the Chemical

Thermal decomposition can lead to release of irritating gases and vapors. Containers may explode when heated.

### Hazardous Combustion Products

Chlorine. Phosgene. Hydrogen chloride gas.

### Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

### NFPA

<b>Health</b>	<b>Flammability</b>	<b>Instability</b>	<b>Physical hazards</b>
2	0	0	N/A

## 6. Accidental release measures

<b>Personal Precautions</b>	Use personal protective equipment as required. Ensure adequate ventilation.
<b>Environmental Precautions</b>	Do not flush into surface water or sanitary sewer system.
<b>Methods for Containment and Clean Up</b>	Soak up with inert absorbent material. Keep in suitable, closed containers for disposal.

## 7. Handling and storage

<b>Handling</b>	Wear personal protective equipment/face protection. Do not get in eyes, on skin, or on clothing. Ensure adequate ventilation. Avoid ingestion and inhalation.
<b>Storage</b>	Keep containers tightly closed in a dry, cool and well-ventilated place. Protect from sunlight.

## 8. Exposure controls / personal protection

**Exposure Guidelines**

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Tetrachloroethylene	TWA: 25 ppm STEL: 100 ppm	(Vacated) TWA: 25 ppm (Vacated) TWA: 170 mg/m <sup>3</sup> Ceiling: 200 ppm TWA: 100 ppm	IDLH: 150 ppm	TWA: 25 ppm STEL: 100 ppm

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: NIOSH - National Institute for Occupational Safety and Health

**Engineering Measures**

Use only under a chemical fume hood. Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location.

**Personal Protective Equipment****Eye/face Protection**

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

**Skin and body protection**

Wear appropriate protective gloves and clothing to prevent skin exposure.

**Respiratory Protection**

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

**Hygiene Measures**

Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

<b>Physical State</b>	Liquid
<b>Appearance</b>	Colorless
<b>Odor</b>	Characteristic, sweet
<b>Odor Threshold</b>	No information available
<b>pH</b>	No information available
<b>Melting Point/Range</b>	-22 °C / -7.6 °F
<b>Boiling Point/Range</b>	120 - 122 °C / 248 - 251.6 °F @ 760 mmHg
<b>Flash Point</b>	No information available
<b>Evaporation Rate</b>	6.0 (Ether = 1.0)
<b>Flammability (solid,gas)</b>	Not applicable
<b>Flammability or explosive limits</b>	
<b>Upper</b>	No data available
<b>Lower</b>	No data available
<b>Vapor Pressure</b>	18 mbar @ 20 °C
<b>Vapor Density</b>	No information available
<b>Density</b>	1.619
<b>Specific Gravity</b>	1.625
<b>Solubility</b>	0.15 g/L water (20°C)
<b>Partition coefficient; n-octanol/water</b>	No data available
<b>Autoignition Temperature</b>	No information available
<b>Decomposition Temperature</b>	> 150°C
<b>Viscosity</b>	0.89 mPa s at 20 °C
<b>Molecular Formula</b>	C <sub>2</sub> Cl <sub>4</sub>
<b>Molecular Weight</b>	165.83

## 10. Stability and reactivity

<b>Reactive Hazard</b>	None known, based on information available
<b>Stability</b>	Stable under normal conditions.
<b>Conditions to Avoid</b>	Incompatible products. Excess heat. Exposure to moist air or water.
<b>Incompatible Materials</b>	Strong acids, Strong oxidizing agents, Strong bases, Metals, Zinc, Amines, Aluminium
<b>Hazardous Decomposition Products</b>	Chlorine, Phosgene, Hydrogen chloride gas
<b>Hazardous Polymerization</b>	Hazardous polymerization does not occur.
<b>Hazardous Reactions</b>	None under normal processing.

## 11. Toxicological information

### Acute Toxicity

#### Product Information Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Tetrachloroethylene	LD50 = 2629 mg/kg ( Rat )	LD50 > 10000 mg/kg (Rat)	LC50 = 27.8 mg/L ( Rat ) 4 h

**Toxicologically Synergistic Products** No information available

#### Delayed and immediate effects as well as chronic effects from short and long-term exposure

**Irritation** Irritating to eyes and skin

**Sensitization** No information available

**Carcinogenicity** The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Tetrachloroethylene	127-18-4	Group 2A	Reasonably Anticipated	A3	X	A3

*IARC (International Agency for Research on Cancer)*

*IARC (International Agency for Research on Cancer)*

*Group 1 - Carcinogenic to Humans*

*Group 2A - Probably Carcinogenic to Humans*

*Group 2B - Possibly Carcinogenic to Humans*

*NTP: (National Toxicity Program)*

*Known - Known Carcinogen*

*Reasonably Anticipated - Reasonably Anticipated to be a Human Carcinogen*

*A1 - Known Human Carcinogen*

*A2 - Suspected Human Carcinogen*

*A3 - Animal Carcinogen*

*ACGIH: (American Conference of Governmental Industrial Hygienists)*

*Mexico - Occupational Exposure Limits - Carcinogens*

*A1 - Confirmed Human Carcinogen*

*A2 - Suspected Human Carcinogen*

*A3 - Confirmed Animal Carcinogen*

*A4 - Not Classifiable as a Human Carcinogen*

*A5 - Not Suspected as a Human Carcinogen*

*ACGIH: (American Conference of Governmental Industrial Hygienists)*

*Mexico - Occupational Exposure Limits - Carcinogens*

**Mutagenic Effects** No information available

**Reproductive Effects** No information available.

**Developmental Effects** No information available.

**Teratogenicity** No information available.

**STOT - single exposure** Central nervous system (CNS)

**STOT - repeated exposure** Kidney Liver Blood

**Aspiration hazard** No information available

**Symptoms / effects, both acute and delayed** Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting: Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing

#### Endocrine Disruptor Information

Component	EU - Endocrine Disruptors Candidate List	EU - Endocrine Disruptors - Evaluated Substances	Japan - Endocrine Disruptor Information
Tetrachloroethylene	Group II Chemical	Not applicable	Not applicable

**Other Adverse Effects** Tumorigenic effects have been reported in experimental animals.

## 12. Ecological information

#### Ecotoxicity

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Tetrachloroethylene	EC50: > 500 mg/L, 96h (Pseudokirchneriella subcapitata)	LC50: 4.73 - 5.27 mg/L, 96h flow-through (Oncorhynchus mykiss) LC50: 11.0 - 15.0 mg/L, 96h static (Lepomis macrochirus) LC50: 8.6 - 13.5 mg/L, 96h static (Pimephales promelas) LC50: 12.4 - 14.4 mg/L, 96h flow-through (Pimephales promelas)	EC50 = 100 mg/L 24 h EC50 = 112 mg/L 24 h EC50 = 120.0 mg/L 30 min	EC50: 6.1 - 9.0 mg/L, 48h Static (Daphnia magna)

**Persistence and Degradability** Insoluble in water Persistence is unlikely based on information available.

**Bioaccumulation/ Accumulation** No information available.

**Mobility** . Is not likely mobile in the environment due its low water solubility. Will likely be mobile in the environment due to its volatility.

Component	log Pow
Tetrachloroethylene	2.88

## 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Tetrachloroethylene - 127-18-4	U210	-

## 14. Transport information

#### DOT

UN-No UN1897  
 Proper Shipping Name TETRACHLOROETHYLENE  
 Hazard Class 6.1  
 Packing Group III

#### TDG

UN-No UN1897

<b>Proper Shipping Name</b>	TETRACHLOROETHYLENE
<b>Hazard Class</b>	6.1
<b>Packing Group</b>	III
<b>IATA</b>	
<b>UN-No</b>	UN1897
<b>Proper Shipping Name</b>	TETRACHLOROETHYLENE
<b>Hazard Class</b>	6.1
<b>Packing Group</b>	III
<b>IMDG/IMO</b>	
<b>UN-No</b>	UN1897
<b>Proper Shipping Name</b>	TETRACHLOROETHYLENE
<b>Hazard Class</b>	6.1
<b>Packing Group</b>	III

## 15. Regulatory information

### United States of America Inventory

Component	CAS-No	TSCA	TSCA Inventory notification - Active/Inactive	TSCA - EPA Regulatory Flags
Tetrachloroethylene	127-18-4	X	ACTIVE	-

#### Legend:

**TSCA** - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

'-' - Not Listed

**TSCA 12(b)** - Notices of Export      Not applicable

### International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Australia (AICS), China (IECSC), Korea (ECL).

Component	CAS-No	DSL	NDSL	EINECS	PICCS	ENCS	AICS	IECSC	KECL
Tetrachloroethylene	127-18-4	X	-	204-825-9	X	X	X	X	KE-33294

### U.S. Federal Regulations

#### SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Tetrachloroethylene	127-18-4	>95	0.1

**SARA 311/312 Hazard Categories**      See section 2 for more information

#### CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Tetrachloroethylene	-	-	X	X

#### Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Tetrachloroethylene	X		-

**OSHA** - Occupational Safety and Health Administration      Not applicable

#### CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Tetrachloroethylene	100 lb 1 lb	-

**California Proposition 65** This product contains the following Proposition 65 chemicals.

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Tetrachloroethylene	127-18-4	Carcinogen	14 µg/day	Carcinogen

**U.S. State Right-to-Know Regulations**

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Tetrachloroethylene	X	X	X	X	X

**U.S. Department of Transportation**

Reportable Quantity (RQ): Y  
 DOT Marine Pollutant Y  
 DOT Severe Marine Pollutant N

**U.S. Department of Homeland Security** This product does not contain any DHS chemicals.

**Other International Regulations**

**Mexico - Grade** No information available

## 16. Other information

**Prepared By** Regulatory Affairs  
 Thermo Fisher Scientific  
 Email: EMSDS.RA@thermofisher.com

**Creation Date** 10-Dec-2009

**Revision Date** 23-Jan-2018

**Print Date** 23-Jan-2018

**Revision Summary** This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

**Disclaimer**

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

**End of SDS**

### SECTION 1: Identification

#### 1.1. Identification

Product form	: Substance
Substance name	: Toluene
CAS-No.	: 108-88-3
Product code	: LC26170
Formula	: C7H8
Synonyms	: benzyl hydride / methylbenzene / phenylmethane / tolunol / toluol oil / toluole

#### 1.2. Recommended use and restrictions on use

Use of the substance/mixture	: Solvent
------------------------------	-----------

#### 1.3. Supplier

LabChem Inc  
Jackson's Pointe Commerce Park Building 1000, 1010 Jackson's Pointe Court  
Zelienople, PA 16063 - USA  
T 412-826-5230 - F 724-473-0647  
[info@labchem.com](mailto:info@labchem.com) - [www.labchem.com](http://www.labchem.com)

#### 1.4. Emergency telephone number

Emergency number	: CHEMTREC: 1-800-424-9300 or 011-703-527-3887
------------------	--

### SECTION 2: Hazard(s) identification

#### 2.1. Classification of the substance or mixture

##### GHS-US classification

Flammable liquids, Category 2	H225	Highly flammable liquid and vapour.
Skin corrosion/irritation, Category 2	H315	Causes skin irritation.
Reproductive toxicity, Category 2	H361	Suspected of damaging fertility or the unborn child.
Specific target organ toxicity — Single exposure, Category 3, Narcosis	H336	May cause drowsiness or dizziness.
Specific target organ toxicity — Repeated exposure, Category 2	H373	May cause damage to organs (central nervous system, liver, heart) through prolonged or repeated exposure.
Aspiration hazard, Category 1	H304	May be fatal if swallowed and enters airways.
Hazardous to the aquatic environment — Acute Hazard, Category 3	H402	Harmful to aquatic life

Full text of H statements : see section 16

#### 2.2. GHS Label elements, including precautionary statements

##### GHS-US labelling

Hazard pictograms (GHS-US)



Signal word (GHS-US)

: Danger

Hazard statements (GHS-US)

: H225 - Highly flammable liquid and vapour.  
H304 - May be fatal if swallowed and enters airways.  
H315 - Causes skin irritation.  
H336 - May cause drowsiness or dizziness.  
H361 - Suspected of damaging fertility or the unborn child.  
H373 - May cause damage to organs (central nervous system, liver, heart) through prolonged or repeated exposure.  
H402 - Harmful to aquatic life

# Toluene

## Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

- Precautionary statements (GHS-US) :
- P201 - Obtain special instructions before use.
  - P202 - Do not handle until all safety precautions have been read and understood.
  - P210 - Keep away from heat, sparks, open flames, hot surfaces. No smoking.
  - P233 - Keep container tightly closed.
  - P240 - Ground/bond container and receiving equipment.
  - P241 - Use explosion-proof electrical, ventilating, lighting equipment.
  - P242 - Use only non-sparking tools.
  - P243 - Take precautionary measures against static discharge.
  - P260 - Do not breathe mist, vapours, spray.
  - P264 - Wash exposed skin thoroughly after handling.
  - P271 - Use only outdoors or in a well-ventilated area.
  - P273 - Avoid release to the environment.
  - P280 - Wear protective gloves, protective clothing, eye protection, face protection.
  - P301+P310 - IF SWALLOWED: Immediately call a POISON CENTER/doctor
  - P303+P361+P353 - IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
  - P304+P340 - IF INHALED: Remove person to fresh air and keep comfortable for breathing.
  - P308+P313 - IF exposed or concerned: Get medical advice/attention.
  - P312 - Call a POISON CENTER/doctor if you feel unwell.
  - P314 - Get medical advice and attention if you feel unwell.
  - P331 - Do NOT induce vomiting
  - P332+P313 - If skin irritation occurs: Get medical advice/attention.
  - P363 - Wash contaminated clothing before reuse.
  - P370+P378 - In case of fire: Use carbon dioxide (CO<sub>2</sub>), powder, alcohol-resistant foam to extinguish.
  - P403+P235 - Store in a well-ventilated place. Keep cool.
  - P405 - Store locked up.
  - P501 - Dispose of contents/container to comply with local, state and federal regulations

### 2.3. Other hazards which do not result in classification

Other hazards not contributing to the classification : None under normal conditions.

### 2.4. Unknown acute toxicity (GHS US)

Not applicable

## SECTION 3: Composition/information on ingredients

### 3.1. Substances

Substance type : Mono-constituent

Name	Product identifier	%	GHS-US classification
Toluene (Main constituent)	(CAS-No.) 108-88-3	100	Flam. Liq. 2, H225 Skin Irrit. 2, H315 Repr. 2, H361 STOT SE 3, H336 STOT RE 2, H373 Asp. Tox. 1, H304 Aquatic Acute 3, H402

Full text of hazard classes and H-statements : see section 16

### 3.2. Mixtures

Not applicable

## SECTION 4: First-aid measures

### 4.1. Description of first aid measures

- First-aid measures general :
- Check the vital functions. Unconscious: maintain adequate airway and respiration. Respiratory arrest: artificial respiration or oxygen. Cardiac arrest: perform resuscitation. Victim conscious with laboured breathing: half-seated. Victim in shock: on his back with legs slightly raised. Vomiting: prevent asphyxia/aspiration pneumonia. Prevent cooling by covering the victim (no warming up). Keep watching the victim. Give psychological aid. Keep the victim calm, avoid physical strain. Depending on the victim's condition: doctor/hospital. Never give alcohol to drink.
- First-aid measures after inhalation :
- Remove the victim into fresh air. Respiratory problems: consult a doctor/medical service.
- First-aid measures after skin contact :
- Wash immediately with lots of water. Soap may be used. Do not apply (chemical) neutralizing agents. Remove clothing before washing. Take victim to a doctor if irritation persists. Take victim to a doctor/medical service if irritation persists.
- First-aid measures after eye contact :
- Rinse immediately with plenty of water. Remove contact lenses, if present and easy to do. Continue rinsing. Do not apply neutralizing agents. Take victim to an ophthalmologist if irritation persists. Take victim to a doctor/medical service if irritation persists.

# Toluene

## Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

First-aid measures after ingestion : Rinse mouth with water. Immediately after ingestion: give lots of water to drink. Do not give milk/oil to drink. Do not induce vomiting. Give activated charcoal. Call Poison Information Centre ([www.big.be/antigif.htm](http://www.big.be/antigif.htm)). Consult a doctor/medical service if you feel unwell. Ingestion of large quantities: immediately to hospital.

### 4.2. Most important symptoms and effects (acute and delayed)

Symptoms/effects after inhalation : EXPOSURE TO HIGH CONCENTRATIONS: Headache. Nausea. Feeling of weakness. Dizziness. Central nervous system depression. Narcosis. Mental confusion. Drunkenness. Coordination disorders. Disturbed motor response. Disturbances of consciousness.

Symptoms/effects after skin contact : Tingling/irritation of the skin. Red skin.

Symptoms/effects after eye contact : Irritation of the eye tissue.

Symptoms/effects after ingestion : Risk of aspiration pneumonia. Nausea. Abdominal pain. Irritation of the gastric/intestinal mucosa. Symptoms similar to those listed under inhalation.

Chronic symptoms : ON CONTINUOUS/REPEATED EXPOSURE/CONTACT: Dry skin. Skin rash/inflammation. Impairment of the nervous system. Tremor. Impaired memory. Impaired concentration. Brain affection. Disturbances of heart rate. Change in the haemogramme/blood composition.

### 4.3. Immediate medical attention and special treatment, if necessary

Obtain medical assistance.

## SECTION 5: Fire-fighting measures

### 5.1. Suitable (and unsuitable) extinguishing media

Suitable extinguishing media : Quick-acting ABC powder extinguisher. Quick-acting BC powder extinguisher. Quick-acting class B foam extinguisher. Quick-acting CO2 extinguisher. Class B foam (not alcohol-resistant).

Unsuitable extinguishing media : Water (quick-acting extinguisher, reel); risk of puddle expansion. Water; risk of puddle expansion.

### 5.2. Specific hazards arising from the chemical

Fire hazard : DIRECT FIRE HAZARD: Highly flammable liquid and vapour. Gas/vapour flammable with air within explosion limits. INDIRECT FIRE HAZARD: May build up electrostatic charges: risk of ignition. May be ignited by sparks. Gas/vapour spreads at floor level: ignition hazard. Reactions involving a fire hazard: see "Reactivity Hazard".

Explosion hazard : DIRECT EXPLOSION HAZARD: Gas/vapour explosive with air within explosion limits. INDIRECT EXPLOSION HAZARD: may be ignited by sparks. Reactions with explosion hazards: see "Reactivity Hazard".

Reactivity : Reacts violently with (some) halogens. Reacts violently with (strong) oxidizers: (increased) risk of fire/explosion. Violent to explosive reaction with (some) acids.

### 5.3. Special protective equipment and precautions for fire-fighters

Firefighting instructions : Cool tanks/drums with water spray/remove them into safety. Do not move the load if exposed to heat.

Protection during firefighting : Heat/fire exposure: compressed air/oxygen apparatus.

## SECTION 6: Accidental release measures

### 6.1. Personal precautions, protective equipment and emergency procedures

#### 6.1.1. For non-emergency personnel

Protective equipment : Gloves. Protective goggles. Head/neck protection. Protective clothing. Large spills/in enclosed spaces: compressed air apparatus. Large spills/in enclosed spaces: gas-tight suit.

Emergency procedures : Keep upwind. Mark the danger area. Consider evacuation. Seal off low-lying areas. Close doors and windows of adjacent premises. Stop engines and no smoking. No naked flames or sparks. Spark- and explosionproof appliances and lighting equipment. Keep containers closed. Wash contaminated clothes.

#### 6.1.2. For emergency responders

Protective equipment : Do not breathe gas, fumes, vapour or spray. Equip cleanup crew with proper protection.

Emergency procedures : Stop leak if safe to do so. Ventilate area. If a major spill occurs, all personnel should be immediately evacuated and the area ventilated.

### 6.2. Environmental precautions

Prevent soil and water pollution.

# Toluene

## Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

### 6.3. Methods and material for containment and cleaning up

- For containment : Contain released product, pump into suitable containers. Plug the leak, cut off the supply. Dam up the liquid spill. Try to reduce evaporation. Measure the concentration of the explosive gas-air mixture. Dilute/disperse combustible gas/vapour with water curtain. Provide equipment/receptacles with earthing. Do not use compressed air for pumping over spills.
- Methods for cleaning up : Liquid spill: cover with foam. Take up liquid spill into inert absorbent material, e.g.: sand, earth, vermiculite. Scoop absorbed substance into closing containers. Carefully collect the spill/leftovers. Damaged/cooled tanks must be emptied. Do not use compressed air for pumping over spills. Take collected spill to manufacturer/competent authority. Wash clothing and equipment after handling.

### 6.4. Reference to other sections

No additional information available

## SECTION 7: Handling and storage

### 7.1. Precautions for safe handling

- Precautions for safe handling : Use spark-/explosionproof appliances and lighting system. Take precautions against electrostatic charges. Keep away from naked flames/heat. Keep away from ignition sources/sparks. Measure the concentration in the air regularly. Work under local exhaust/ventilation. Comply with the legal requirements. Remove contaminated clothing immediately. Clean contaminated clothing. Handle uncleaned empty containers as full ones. Thoroughly clean/dry the installation before use. Do not discharge the waste into the drain. Do not use compressed air for pumping over.
- Hygiene measures : Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work. Do not eat, drink or smoke when using this product.

### 7.2. Conditions for safe storage, including any incompatibilities

- Incompatible products : Strong oxidizers.
- Incompatible materials : Direct sunlight. Heat sources. Sources of ignition.
- Heat and ignition sources : KEEP SUBSTANCE AWAY FROM: heat sources. ignition sources.
- Prohibitions on mixed storage : KEEP SUBSTANCE AWAY FROM: oxidizing agents. (strong) acids. halogens.
- Storage area : Store at ambient temperature. Ventilation at floor level. Fireproof storeroom. Provide for a tub to collect spills. Provide the tank with earthing. Under a shelter/in the open. Store only in a limited quantity. May be stored under nitrogen. Meet the legal requirements. Keep out of direct sunlight.
- Special rules on packaging : SPECIAL REQUIREMENTS: closing. clean. correctly labelled. meet the legal requirements. Secure fragile packagings in solid containers.
- Packaging materials : SUITABLE MATERIAL: metal. stainless steel. carbon steel. aluminium. nickel. polypropylene. glass. tin. MATERIAL TO AVOID: polyethylene.

## SECTION 8: Exposure controls/personal protection

### 8.1. Control parameters

Toluene (108-88-3)		
ACGIH	ACGIH TWA (ppm)	20 ppm
OSHA	OSHA PEL (TWA) (ppm)	200 ppm
OSHA	OSHA PEL (STEL) (ppm)	500 ppm 10-min peak per 8 hour shift
OSHA	OSHA PEL (Ceiling) (ppm)	300 ppm
IDLH	US IDLH (ppm)	500 ppm
NIOSH	NIOSH REL (TWA) (mg/m <sup>3</sup> )	375 mg/m <sup>3</sup>
NIOSH	NIOSH REL (TWA) (ppm)	100 ppm
NIOSH	NIOSH REL (STEL) (mg/m <sup>3</sup> )	560 mg/m <sup>3</sup>
NIOSH	NIOSH REL (STEL) (ppm)	150 ppm

### 8.2. Appropriate engineering controls

- Appropriate engineering controls : Emergency eye wash fountains and safety showers should be available in the immediate vicinity of any potential exposure. Ensure adequate ventilation.

### 8.3. Individual protection measures/Personal protective equipment

# Toluene

## Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

### Materials for protective clothing:

GIVE GOOD RESISTANCE: tetrafluoroethylene. viton. PVA. GIVE LESS RESISTANCE: butyl rubber. natural rubber. neoprene. nitrile rubber. polyethylene. neoprene/natural rubber. nitrile rubber/PVC. GIVE POOR RESISTANCE: chloroprene rubber

### Hand protection:

Gloves

### Eye protection:

Safety glasses

### Skin and body protection:

Head/neck protection. Protective clothing

### Respiratory protection:

Full face mask with filter type A at conc. in air > exposure limit

## SECTION 9: Physical and chemical properties

### 9.1. Information on basic physical and chemical properties

Physical state	: Liquid
Appearance	: Liquid.
Colour	: Colourless
Odour	: Aromatic odour
Odour threshold	: 0.2 - 69 ppm 0.8 - 276 mg/m <sup>3</sup>
pH	: No data available
Melting point	: -95 °C (1013 hPa)
Freezing point	: No data available
Boiling point	: 110.6 °C (1013 hPa)
Critical temperature	: 321 °C
Critical pressure	: 41077 hPa
Flash point	: 4.4 °C (Closed cup, 1013 hPa)
Relative evaporation rate (butylacetate=1)	: 2.24
Flammability (solid, gas)	: No data available
Vapour pressure	: 30.89 hPa (21.1 °C)
Vapour pressure at 50 °C	: 109 hPa
Relative vapour density at 20 °C	: 3.1
Relative density	: 0.87 (20 °C)
Relative density of saturated gas/air mixture	: 1.6
Density	: 870 kg/m <sup>3</sup>
Molecular mass	: 92.14 g/mol
Solubility	: Insoluble in water. Soluble in ethanol. Soluble in ether. Soluble in acetone. Soluble in chloroform. Soluble in carbondisulfide. Soluble in acetic acid. Soluble in ethylacetate. Soluble in petroleum spirit. Water: 0.057 - 0.059 g/100ml (25 °C) Ethanol: complete Ether: complete Acetone: > 10 g/100ml
Log Pow	: 2.73 (Experimental value, 20 °C)
Auto-ignition temperature	: 480 °C (1013 hPa)
Decomposition temperature	: No data available
Viscosity, kinematic	: 0.69 mm <sup>2</sup> /s (20 °C)
Viscosity, dynamic	: 0.6 mPa.s (20 °C)

# Toluene

## Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Explosive limits	: 1.3 - 7 vol % 46 - 270 g/m <sup>3</sup> Lower explosive limit (LEL): 1.3 vol % Upper explosive limit (UEL): 7 vol %
Explosive properties	: No data available
Oxidising properties	: No data available

### 9.2. Other information

Minimum ignition energy	: 0.3 mJ
Specific conductivity	: < 1 pS/m
Saturation concentration	: 110 g/m <sup>3</sup>
VOC content	: 100 %
Other properties	: Gas/vapour heavier than air at 20°C. Clear. Volatile. Substance has neutral reaction. May generate electrostatic charges.

## SECTION 10: Stability and reactivity

### 10.1. Reactivity

Reacts violently with (some) halogens. Reacts violently with (strong) oxidizers: (increased) risk of fire/explosion. Violent to explosive reaction with (some) acids.

### 10.2. Chemical stability

Stable under normal conditions.

### 10.3. Possibility of hazardous reactions

No additional information available

### 10.4. Conditions to avoid

Heat. Direct sunlight. Sparks. Open flame.

### 10.5. Incompatible materials

Strong oxidizers.

### 10.6. Hazardous decomposition products

Carbon dioxide. Carbon monoxide.

## SECTION 11: Toxicological information

### 11.1. Information on toxicological effects

Likely routes of exposure	: Inhalation; Skin and eyes contact
Acute toxicity	: Not classified

Toluene (108-88-3)	
LD50 oral rat	5580 mg/kg bodyweight (Equivalent or similar to EU Method B.1: Acute Toxicity (Oral), Rat, Male, Experimental value)
LD50 dermal rabbit	> 5000 mg/kg bodyweight (Other, 24 h, Rabbit, Male, Experimental value)
LC50 inhalation rat (mg/l)	25.7 mg/l air (Equivalent or similar to OECD 403, 4 h, Rat, Male, Experimental value)
ATE US (oral)	5580 mg/kg bodyweight

Skin corrosion/irritation	: Causes skin irritation.
Serious eye damage/irritation	: Not classified
Respiratory or skin sensitisation	: Not classified
Germ cell mutagenicity	: Not classified
Carcinogenicity	: Not classified
Reproductive toxicity	: Suspected of damaging fertility or the unborn child.
Specific target organ toxicity (single exposure)	: May cause drowsiness or dizziness.
Specific target organ toxicity (repeated exposure)	: May cause damage to organs (central nervous system, liver, heart) through prolonged or repeated exposure.
Aspiration hazard	: May be fatal if swallowed and enters airways.

# Toluene

## Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Potential adverse human health effects and symptoms	: May be fatal if swallowed and enters airways. Practically non-toxic if swallowed (LD50 oral, rat > 2000 mg/kg). Causes skin irritation. Non-toxic in contact with skin (LD50 skin > 5000 mg/kg). May cause drowsiness or dizziness. Non-toxic by inhalation (LC50 inh, rat > 20 mg/l/4h). Moderately irritant for eyes. Caution! Substance is absorbed through the skin.
Symptoms/effects after inhalation	: EXPOSURE TO HIGH CONCENTRATIONS: Headache. Nausea. Feeling of weakness. Dizziness. Central nervous system depression. Narcosis. Mental confusion. Drunkenness. Coordination disorders. Disturbed motor response. Disturbances of consciousness.
Symptoms/effects after skin contact	: Tingling/irritation of the skin. Red skin.
Symptoms/effects after eye contact	: Irritation of the eye tissue.
Symptoms/effects after ingestion	: Risk of aspiration pneumonia. Nausea. Abdominal pain. Irritation of the gastric/intestinal mucosa. Symptoms similar to those listed under inhalation.
Chronic symptoms	: ON CONTINUOUS/REPEATED EXPOSURE/CONTACT: Dry skin. Skin rash/inflammation. Impairment of the nervous system. Tremor. Impaired memory. Impaired concentration. Brain affection. Disturbances of heart rate. Change in the haemogramme/blood composition.

### SECTION 12: Ecological information

#### 12.1. Toxicity

Ecology - general	: Not classified as dangerous for the environment according to the criteria of Regulation (EC) No 1272/2008.
Ecology - air	: Not included in the list of fluorinated greenhouse gases (Regulation (EU) No 517/2014). Not classified as dangerous for the ozone layer (Regulation (EC) No 1005/2009).
Ecology - water	: Toxic to crustacea. Toxic to fishes. Groundwater pollutant. Fouling to shoreline. Inhibits photosynthesis of algae. Harmful to bacteria. Taste alteration in fishes/aquatic organisms.

#### Toluene (108-88-3)

LC50 fish 1	5.5 mg/l (96 h, Oncorhynchus kisutch, Flow-through system, Fresh water, Experimental value)
-------------	---

#### 12.2. Persistence and degradability

#### Toluene (108-88-3)

Persistence and degradability	Biodegradable in the soil. Readily biodegradable in water.
Biochemical oxygen demand (BOD)	2.15 g O <sub>2</sub> /g substance
Chemical oxygen demand (COD)	2.52 g O <sub>2</sub> /g substance
ThOD	3.13 g O <sub>2</sub> /g substance
BOD (% of ThOD)	0.69

#### 12.3. Bioaccumulative potential

#### Toluene (108-88-3)

BCF fish 1	90 (72 h, Leuciscus idus, Static system, Fresh water, Experimental value)
Log Pow	2.73 (Experimental value, 20 °C)
Bioaccumulative potential	Low potential for bioaccumulation (BCF < 500).

#### 12.4. Mobility in soil

#### Toluene (108-88-3)

Surface tension	27.73 N/m (25 °C)
Ecology - soil	Low potential for adsorption in soil.

#### 12.5. Other adverse effects

No additional information available

### SECTION 13: Disposal considerations

#### 13.1. Disposal methods

Regional legislation (waste)	: LWCA (the Netherlands): KGA category 03.
------------------------------	--

# Toluene

## Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

- Waste disposal recommendations : Do not discharge into drains or the environment. Remove waste in accordance with local and/or national regulations. Hazardous waste shall not be mixed together with other waste. Different types of hazardous waste shall not be mixed together if this may entail a risk of pollution or create problems for the further management of the waste. Hazardous waste shall be managed responsibly. All entities that store, transport or handle hazardous waste shall take the necessary measures to prevent risks of pollution or damage to people or animals. Recycle by distillation. Do not landfill. Incinerate under surveillance with energy recovery. May be discharged to company wastewater treatment plant.
- Additional information : Hazardous waste according to Directive 2008/98/EC, as amended by Regulation (EU) No 1357/2014 and Regulation (EU) No 2017/997.

### SECTION 14: Transport information

#### Department of Transportation (DOT)

In accordance with DOT

- Transport document description : UN1294 Toluene, 3, II
- UN-No.(DOT) : UN1294
- Proper Shipping Name (DOT) : Toluene
- Transport hazard class(es) (DOT) : 3 - Class 3 - Flammable and combustible liquid 49 CFR 173.120
- Packing group (DOT) : II - Medium Danger
- Hazard labels (DOT) : 3 - Flammable liquid



- DOT Packaging Non Bulk (49 CFR 173.xxx) : 202
- DOT Packaging Bulk (49 CFR 173.xxx) : 242
- DOT Special Provisions (49 CFR 172.102) : IB2 - Authorized IBCs: Metal (31A, 31B and 31N); Rigid plastics (31H1 and 31H2); Composite (31HZ1). Additional Requirement: Only liquids with a vapor pressure less than or equal to 110 kPa at 50 C (1.1 bar at 122 F), or 130 kPa at 55 C (1.3 bar at 131 F) are authorized.  
T4 - 2.65 178.274(d)(2) Normal..... 178.275(d)(3)  
TP1 - The maximum degree of filling must not exceed the degree of filling determined by the following: Degree of filling =  $97 / (1 + a (tr - tf))$  Where: tr is the maximum mean bulk temperature during transport, and tf is the temperature in degrees celsius of the liquid during filling.
- DOT Packaging Exceptions (49 CFR 173.xxx) : 150
- DOT Quantity Limitations Passenger aircraft/rail (49 CFR 173.27) : 5 L
- DOT Quantity Limitations Cargo aircraft only (49 CFR 175.75) : 60 L
- DOT Vessel Stowage Location : B - (i) The material may be stowed "on deck" or "under deck" on a cargo vessel and on a passenger vessel carrying a number of passengers limited to not more than the larger of 25 passengers, or one passenger per each 3 m of overall vessel length; and (ii) "On deck only" on passenger vessels in which the number of passengers specified in paragraph (k)(2)(i) of this section is exceeded.
- Other information : No supplementary information available.

### SECTION 15: Regulatory information

#### 15.1. US Federal regulations

Toluene (108-88-3)	
Listed on the United States TSCA (Toxic Substances Control Act) inventory Subject to reporting requirements of United States SARA Section 313	
RQ (Reportable quantity, section 304 of EPA's List of Lists)	1000 lb
SARA Section 311/312 Hazard Classes	Health hazard - Skin corrosion or Irritation Health hazard - Reproductive toxicity Physical hazard - Flammable (gases, aerosols, liquids, or solids) Health hazard - Specific target organ toxicity (single or repeated exposure) Health hazard - Aspiration hazard

# Toluene

## Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory

Chemical(s) subject to the reporting requirements of Section 313 or Title III of the Superfund Amendments and Reauthorization Act (SARA) of 1986 and 40 CFR Part 372.

Toluene	CAS-No. 108-88-3	100%
---------	------------------	------

### 15.2. International regulations

#### CANADA

##### Toluene (108-88-3)

Listed on the Canadian DSL (Domestic Substances List)

#### EU-Regulations

No additional information available

#### National regulations

##### Toluene (108-88-3)

Listed on the Canadian IDL (Ingredient Disclosure List)

### 15.3. US State regulations

##### Toluene (108-88-3)

U.S. - California - Proposition 65 - Carcinogens List	No
U.S. - California - Proposition 65 - Developmental Toxicity	Yes
U.S. - California - Proposition 65 - Reproductive Toxicity - Female	Yes
U.S. - California - Proposition 65 - Reproductive Toxicity - Male	No
No significant risk level (NSRL)	7000 µg/day

This product can expose you to Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## SECTION 16: Other information

Revision date : 02/27/2018

Full text of H-statements: see section 16:

H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H361	Suspected of damaging fertility or the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure.
H402	Harmful to aquatic life

NFPA health hazard


: 2 - Materials that, under emergency conditions, can cause temporary incapacitation or residual injury.

NFPA fire hazard

: 3 - Liquids and solids (including finely divided suspended solids) that can be ignited under almost all ambient temperature conditions.

NFPA reactivity

: 0 - Material that in themselves are normally stable, even under fire conditions.



# Toluene

## Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

---

### Hazard Rating

Health : 3 Serious Hazard - Major injury likely unless prompt action is taken and medical treatment is given

Flammability : 1 Slight Hazard - Materials that must be preheated before ignition will occur. Includes liquids, solids and semi solids having a flash point above 200 F. (Class IIIB)

Physical : 2 Moderate Hazard - Materials that are unstable and may undergo violent chemical changes at normal temperature and pressure with low risk for explosion. Materials may react violently with water or form peroxides upon exposure to air.

Personal protection : H  
H - Splash goggles, Gloves, Synthetic apron, Vapor respirator

SDS US LabChem

*Information in this SDS is from available published sources and is believed to be accurate. No warranty, express or implied, is made and LabChem Inc assumes no liability resulting from the use of this SDS. The user must determine suitability of this information for his application.*

# SAFETY DATA SHEET

Creation Date 03-Feb-2010

Revision Date 14-Jul-2016

Revision Number 2

## 1. Identification

**Product Name** Trichloroethylene

**Cat No. :** T340-4; T341-4; T341-20; T341-500; T403-4

**Synonyms** Trichloroethene (Stabilized/Technical/Electronic/Certified ACS)

**Recommended Use** Laboratory chemicals.

**Uses advised against**

### Details of the supplier of the safety data sheet

#### **Company**

Fisher Scientific  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

#### **Emergency Telephone Number**

CHEMTREC®, Inside the USA: 800-424-9300  
CHEMTREC®, Outside the USA: 001-703-527-3887

## 2. Hazard(s) identification

### **Classification**

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin Corrosion/irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Skin Sensitization	Category 1
Germ Cell Mutagenicity	Category 2
Carcinogenicity	Category 1A
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Central nervous system (CNS).	
Specific target organ toxicity - (repeated exposure)	Category 2
Target Organs - Kidney, Liver, Heart, spleen, Blood.	

### **Label Elements**

#### **Signal Word**

Danger

#### **Hazard Statements**

Causes skin irritation  
Causes serious eye irritation  
May cause an allergic skin reaction  
May cause drowsiness or dizziness  
Suspected of causing genetic defects  
May cause cancer  
May cause damage to organs through prolonged or repeated exposure

**Precautionary Statements****Prevention**

Obtain special instructions before use  
 Do not handle until all safety precautions have been read and understood  
 Use personal protective equipment as required  
 Wash face, hands and any exposed skin thoroughly after handling  
 Contaminated work clothing should not be allowed out of the workplace  
 Do not breathe dust/fume/gas/mist/vapors/spray  
 Use only outdoors or in a well-ventilated area  
 Wear protective gloves/protective clothing/eye protection/face protection

**Response**

IF exposed or concerned: Get medical attention/advice

**Inhalation**

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

**Skin**

IF ON SKIN: Wash with plenty of soap and water  
 Take off contaminated clothing and wash before reuse  
 If skin irritation or rash occurs: Get medical advice/attention

**Eyes**

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing  
 If eye irritation persists: Get medical advice/attention

**Storage**

Store locked up  
 Store in a well-ventilated place. Keep container tightly closed

**Disposal**

Dispose of contents/container to an approved waste disposal plant

**Hazards not otherwise classified (HNOC)**

Harmful to aquatic life with long lasting effects

WARNING! This product contains a chemical known in the State of California to cause cancer, birth defects or other reproductive harm.

### 3. Composition / information on ingredients

Component	CAS-No	Weight %
Trichloroethylene	79-01-6	100

### 4. First-aid measures

**General Advice**

Show this safety data sheet to the doctor in attendance. Immediate medical attention is required.

**Eye Contact**

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. In the case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

**Skin Contact**

Wash off immediately with plenty of water for at least 15 minutes. Immediate medical attention is required.

**Inhalation**

Move to fresh air. If not breathing, give artificial respiration. Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a

pocket mask equipped with a one-way valve or other proper respiratory medical device. Immediate medical attention is required.

**Ingestion** Do not induce vomiting. Call a physician or Poison Control Center immediately.

**Most important symptoms/effects** None reasonably foreseeable. May cause allergic skin reaction. Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting: Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing

**Notes to Physician** Treat symptomatically

## 5. Fire-fighting measures

**Suitable Extinguishing Media** Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**Unsuitable Extinguishing Media** No information available

**Flash Point** No information available  
**Method -** No information available

**Autoignition Temperature** 410 °C / 770 °F

### Explosion Limits

**Upper** 10.5 vol %

**Lower** 8 vol %

**Oxidizing Properties** Not oxidising

**Sensitivity to Mechanical Impact** No information available

**Sensitivity to Static Discharge** No information available

### Specific Hazards Arising from the Chemical

Thermal decomposition can lead to release of irritating gases and vapors. Containers may explode when heated. Keep product and empty container away from heat and sources of ignition.

### Hazardous Combustion Products

Hydrogen chloride gas Chlorine Phosgene Carbon monoxide (CO) Carbon dioxide (CO<sub>2</sub>)

### Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

### NFPA

**Health**  
2

**Flammability**  
1

**Instability**  
0

**Physical hazards**  
N/A

## 6. Accidental release measures

**Personal Precautions** Ensure adequate ventilation. Use personal protective equipment. Keep people away from and upwind of spill/leak. Evacuate personnel to safe areas.

**Environmental Precautions** Should not be released into the environment. Do not flush into surface water or sanitary sewer system.

**Methods for Containment and Clean Up** Soak up with inert absorbent material. Keep in suitable, closed containers for disposal.

## 7. Handling and storage

**Handling** Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Use only under a chemical fume hood. Do not breathe vapors or spray mist. Do not ingest.

**Storage** Keep containers tightly closed in a dry, cool and well-ventilated place. Protect from light. Do not store in aluminum containers.

## 8. Exposure controls / personal protection

### Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH	Mexico OEL (TWA)
Trichloroethylene	TWA: 10 ppm STEL: 25 ppm	(Vacated) TWA: 50 ppm (Vacated) TWA: 270 mg/m <sup>3</sup> Ceiling: 200 ppm (Vacated) STEL: 200 ppm (Vacated) STEL: 1080 mg/m <sup>3</sup> TWA: 100 ppm	IDLH: 1000 ppm	TWA: 100 ppm TWA: 535 mg/m <sup>3</sup> STEL: 200 ppm STEL: 1080 mg/m <sup>3</sup>

### Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

### Engineering Measures

Use only under a chemical fume hood. Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location.

### Personal Protective Equipment

#### Eye/face Protection

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

#### Skin and body protection

Long sleeved clothing.

#### Respiratory Protection

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

#### Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

Physical State	Liquid
Appearance	Colorless
Odor	Characteristic
Odor Threshold	No information available
pH	No information available
Melting Point/Range	-85 °C / -121 °F
Boiling Point/Range	87 °C / 188.6 °F
Flash Point	No information available
Evaporation Rate	0.69 (Carbon Tetrachloride = 1.0)
Flammability (solid,gas)	Not applicable
Flammability or explosive limits	
Upper	10.5 vol %
Lower	8 vol %
Vapor Pressure	77.3 mbar @ 20 °C
Vapor Density	4.5 (Air = 1.0)
Specific Gravity	1.460
Solubility	Slightly soluble in water
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	410 °C / 770 °F
Decomposition Temperature	> 120°C
Viscosity	0.55 mPa.s (25°C)

**Molecular Formula** C2 H Cl3  
**Molecular Weight** 131.39

## 10. Stability and reactivity

**Reactive Hazard** None known, based on information available

**Stability** Light sensitive.

**Conditions to Avoid** Incompatible products. Excess heat. Exposure to light. Exposure to moist air or water.

**Incompatible Materials** Strong oxidizing agents, Strong bases, Amines, Alkali metals, Metals,

**Hazardous Decomposition Products** Hydrogen chloride gas, Chlorine, Phosgene, Carbon monoxide (CO), Carbon dioxide (CO<sub>2</sub>)

**Hazardous Polymerization** Hazardous polymerization does not occur.

**Hazardous Reactions** None under normal processing.

## 11. Toxicological information

### Acute Toxicity

#### Product Information Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Trichloroethylene	LD50 = 4290 mg/kg ( Rat ) LD50 = 4920 mg/kg ( Rat )	LD50 > 20 g/kg ( Rabbit ) LD50 = 29000 mg/kg ( Rabbit )	LC50 = 26 mg/L ( Rat ) 4 h

**Toxicologically Synergistic Products** No information available

#### Delayed and immediate effects as well as chronic effects from short and long-term exposure

**Irritation** Irritating to eyes and skin

**Sensitization** No information available

**Carcinogenicity** The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Trichloroethylene	79-01-6	Group 1	Reasonably Anticipated	A2	X	Not listed

*IARC: (International Agency for Research on Cancer)*

*NTP: (National Toxicity Program)*

*ACGIH: (American Conference of Governmental Industrial Hygienists)*

*IARC: (International Agency for Research on Cancer)*

*Group 1 - Carcinogenic to Humans*

*Group 2A - Probably Carcinogenic to Humans*

*Group 2B - Possibly Carcinogenic to Humans*

*NTP: (National Toxicity Program)*

*Known - Known Carcinogen*

*Reasonably Anticipated - Reasonably Anticipated to be a Human Carcinogen*

*A1 - Known Human Carcinogen*

*A2 - Suspected Human Carcinogen*

*A3 - Animal Carcinogen*

*ACGIH: (American Conference of Governmental Industrial Hygienists)*

**Mutagenic Effects** Mutagenic effects have occurred in humans.

**Reproductive Effects** No information available.

**Developmental Effects** No information available.

**Teratogenicity** No information available.

<b>STOT - single exposure</b>	Central nervous system (CNS)
<b>STOT - repeated exposure</b>	Kidney Liver Heart spleen Blood
<b>Aspiration hazard</b>	No information available
<b>Symptoms / effects, both acute and delayed</b>	Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting: Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing
<b>Endocrine Disruptor Information</b>	No information available
<b>Other Adverse Effects</b>	The toxicological properties have not been fully investigated.

## 12. Ecological information

### Ecotoxicity

Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Do not empty into drains. The product contains following substances which are hazardous for the environment. Contains a substance which is: Harmful to aquatic organisms. Toxic to aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Trichloroethylene	EC50: = 175 mg/L, 96h (Pseudokirchneriella subcapitata) EC50: = 450 mg/L, 96h (Desmodesmus subspicatus)	LC50: 39 - 54 mg/L, 96h static (Lepomis macrochirus) LC50: 31.4 - 71.8 mg/L, 96h flow-through (Pimephales promelas)	EC50 = 0.81 mg/L 24 h EC50 = 115 mg/L 10 min EC50 = 190 mg/L 15 min EC50 = 235 mg/L 24 h EC50 = 410 mg/L 24 h EC50 = 975 mg/L 5 min	EC50: = 2.2 mg/L, 48h (Daphnia magna)

**Persistence and Degradability** Persistence is unlikely based on information available.

**Bioaccumulation/ Accumulation** No information available.

**Mobility** Will likely be mobile in the environment due to its volatility.

Component	log Pow
Trichloroethylene	2.4

## 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Trichloroethylene - 79-01-6	U228	-

## 14. Transport information

### DOT

<b>UN-No</b>	UN1710
<b>Proper Shipping Name</b>	TRICHLOROETHYLENE
<b>Hazard Class</b>	6.1
<b>Packing Group</b>	III

### TDG

<b>UN-No</b>	UN1710
<b>Proper Shipping Name</b>	TRICHLOROETHYLENE
<b>Hazard Class</b>	6.1
<b>Packing Group</b>	III

### IATA

<b>UN-No</b>	UN1710
<b>Proper Shipping Name</b>	TRICHLOROETHYLENE

Hazard Class	6.1
Packing Group	III
<b>IMDG/IMO</b>	
UN-No	UN1710
Proper Shipping Name	TRICHLOROETHYLENE
Hazard Class	6.1
Packing Group	III

### 15. Regulatory information

All of the components in the product are on the following Inventory lists: X = listed

#### International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Trichloroethylene	X	X	-	201-167-4	-		X	X	X	X	X

#### Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

#### U.S. Federal Regulations

TSCA 12(b) Not applicable

Component	TSCA 12(b)
Trichloroethylene	Section 5

#### SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Trichloroethylene	79-01-6	100	0.1

#### SARA 311/312 Hazard Categories

Acute Health Hazard	Yes
Chronic Health Hazard	Yes
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

#### CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Trichloroethylene	X	100 lb	X	X

#### Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Trichloroethylene	X		-

OSHA Occupational Safety and Health Administration

Not applicable

**CERCLA**

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Trichloroethylene	100 lb 1 lb	-

**California Proposition 65** This product contains the following proposition 65 chemicals

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Trichloroethylene	79-01-6	Carcinogen Developmental Male Reproductive	14 µg/day 50 µg/day	Developmental Carcinogen

**U.S. State Right-to-Know Regulations**

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Trichloroethylene	X	X	X	X	X

**U.S. Department of Transportation**

Reportable Quantity (RQ): Y  
DOT Marine Pollutant N  
DOT Severe Marine Pollutant N

**U.S. Department of Homeland Security**

This product does not contain any DHS chemicals.

**Other International Regulations**

**Mexico - Grade** No information available

## 16. Other information

**Prepared By** Regulatory Affairs  
Thermo Fisher Scientific  
Email: EMSDS.RA@thermofisher.com

**Creation Date** 03-Feb-2010  
**Revision Date** 14-Jul-2016  
**Print Date** 14-Jul-2016  
**Revision Summary** This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

**Disclaimer**

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

**End of SDS**

# SAFETY DATA SHEET

M9192 - ANSI - EN



---

## VINYL CHLORIDE (MONOMER)

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

---

### 1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

---

<b>Company Identification:</b>	Oxy Vinyls, LP 5005 LBJ Freeway Suite 2200 Dallas, Texas 75244-6119
<b>24 Hour Emergency Telephone Number:</b>	1-800-733-3665 or 1-972-404-3228 (USA); CHEMTREC (within USA and Canada): 1-800-424-9300; CHEMTREC (outside USA and Canada): +1 703-527-3887; CHEMTREC Contract No: CCN16186
<b>To Request an SDS:</b>	MSDS@oxy.com or 1-972-404-3245
<b>Customer Service:</b>	1-800-752-5151 or 1-972-404-3700
<b>Product Identifier:</b>	<b>VINYL CHLORIDE (MONOMER)</b>
<b>Synonyms:</b>	VCM, Monochloroethylene, Chloroethene, Ethylene, chloro-, Vinyl chloride monomer
<b>Product Use:</b>	PVC Manufacturing
<b>Uses Advised Against:</b>	Aerosol propellant.

---

### 2. HAZARDS IDENTIFICATION

---

**OSHA REGULATORY STATUS:** This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

---

# VINYL CHLORIDE (MONOMER)

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

\*\*\*\*\*

## EMERGENCY OVERVIEW:

**Color:** Colorless  
**Physical state** Compressed, liquefied gas  
**Odor:** Sweet

**Signal Word:** **DANGER**

**MAJOR HEALTH HAZARDS:** CONTAINS VINYL CHLORIDE, A KNOWN HUMAN CANCER AGENT. MAY CAUSE CANCER. CONTACT WITH LIQUID MAY CAUSE FROSTBITE TO EXPOSED TISSUE. MAY PRODUCE SYMPTOMS OF CENTRAL NERVOUS SYSTEM DEPRESSION INCLUDING HEADACHE, DIZZINESS, NAUSEA, LOSS OF BALANCE AND DROWSINESS. CAUSES SKIN IRRITATION. CAUSES EYE IRRITATION. MAY CAUSE RESPIRATORY IRRITATION. CAUSES DAMAGE TO LIVER, BLOOD, NERVOUS SYSTEM, LYMPHATIC SYSTEM, AND MUSCULOSKELETAL SYSTEM THROUGH PROLONGED OR REPEATED EXPOSURE. CAUSES DAMAGE TO LUNGS THROUGH PROLONGED OR REPEATED EXPOSURE BY INHALATION. SUSPECTED OF CAUSING GENETIC DEFECTS. SUSPECTED REPRODUCTIVE HAZARD.

**PHYSICAL HAZARDS:** Extremely flammable gas under pressure.

**PRECAUTIONARY STATEMENTS:** Keep away from heat, sparks and flame. Wash thoroughly after handling. Avoid contact with eyes, skin and clothing. Do not breathe vapors or spray mist. Do not eat, drink or smoke in areas where this material is used. Use only outdoors or in a well-ventilated area. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Store in well-ventilated place. Keep container tightly closed.

\*\*\*\*\*

## GHS CLASSIFICATION:

GHS: PHYSICAL HAZARDS:	Flammable Gas - Cat. 1 Extremely Flammable Gas Under Pressure - Liquefied
GHS: CONTACT HAZARD - SKIN:	Category 2 - Causes skin irritation.
GHS: CONTACT HAZARD - EYE:	Category 2B - Causes eye irritation
GHS: TARGET ORGAN TOXICITY (SINGLE EXPOSURE):	Category 3 - May cause respiratory tract irritation Category 3 - May cause drowsiness or dizziness
GHS: TARGET ORGAN TOXICITY (REPEATED EXPOSURE):	Category 1 - Causes damage to liver, blood, nervous system, lymphatic system, musculoskeletal system, respiratory system through prolonged or repeated exposure
GHS: CARCINOGENICITY:	Category 1A - May cause cancer.
GHS: GERM CELL MUTAGENICITY:	Category 2 - Suspected of causing genetic defects
GHS: REPRODUCTION TOXIN:	Category 2 - Suspected of damaging fertility or the unborn child
GHS - OSHA Hazard(s)	Simple Asphyxiant: May displace oxygen and cause rapid suffocation

**Unknown Acute Dermal Toxicity:**

100% of this product consists of ingredient(s) of unknown acute dermal toxicity.

# VINYL CHLORIDE (MONOMER)

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

**Unknown Acute Inhalation Toxicity:**

100% of this product consists of ingredient(s) of unknown acute inhalation toxicity.

**GHS SYMBOL:**

Flame, Gas cylinder, Exclamation mark, Health hazards



**GHS SIGNAL WORD: DANGER**

**GHS HAZARD STATEMENTS:**

**GHS - Physical Hazard Statement(s)**

Extremely flammable gas  
Contains gas under pressure; may explode if heated  
May displace oxygen and cause rapid suffocation

**GHS - Health Hazard Statement(s)**

Causes eye irritation  
Causes skin irritation  
May cause drowsiness or dizziness  
May cause respiratory irritation  
Causes damage to organs through prolonged or repeated exposure: (liver, blood, nervous system, lymphatic system, musculoskeletal system, respiratory system)  
May cause cancer  
Suspected of causing genetic defects  
Suspected of damaging fertility or the unborn child

**GHS - OSHA Hazard(s)**

Simple Asphyxiant: May displace oxygen and cause rapid suffocation

**GHS - Precautionary Statement(s) - Prevention**

Obtain special instructions before use  
Do not handle until all safety precautions have been read and understood  
Keep away from heat/sparks/open flames/hot surfaces. — No smoking  
Do not breathe dust/fume/gas/mist/vapors/spray  
Use personal protective equipment as required  
Wear protective gloves/protective clothing/eye protection/face protection  
Wash thoroughly after handling  
Do not eat, drink or smoke when using this product  
Use only outdoors or in a well-ventilated area

# VINYL CHLORIDE (MONOMER)

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

**GHS - Precautionary Statement(s) - Response**

Leaking gas fire: Do not extinguish, unless leak can be stopped safely

Eliminate all ignition sources if safe to do so

IF INHALED: Remove person to fresh air and keep comfortable for breathing

Call a POISON CENTER or doctor/physician if you feel unwell

IF ON SKIN: Wash with plenty of water

If skin irritation occurs: Get medical advice/attention

Take off contaminated clothing and wash it before reuse

Specific treatment (see First Aid information on product label and/or Section 4 of the SDS)

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing

If eye irritation persists: Get medical advice/attention

Specific treatment (see Section 4 of the safety data sheet and/or the First Aid information on the product label)

Get medical advice/attention if you feel unwell

IF exposed or concerned: call a POISON CENTER or doctor/physician

**GHS - Precautionary Statement(s) - Storage**

Store in a well-ventilated place. Keep container tightly closed

Protect from sunlight

Store locked up

**GHS - Precautionary Statement(s) - Disposal**

Dispose of contents and container in accordance with applicable local, regional, national, and/or international regulations.

**Hazards Not Otherwise Classified (HNOC)**

Direct contact with liquid may cause frostbite to exposed tissue (eyes, skin, etc.)

Polymerization can occur

See Section 11: TOXICOLOGICAL INFORMATION

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

**Synonyms:** VCM, Monochloroethylene, Chloroethene, Ethylene, chloro-, Vinyl chloride monomer

Component	Percent [%]	CAS Number
Vinyl chloride	99 - 100	75-01-4

## 4. FIRST AID MEASURES

**INHALATION:** If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. If breathing is difficult, oxygen should be administered by qualified personnel. If respiration or pulse has stopped, have a trained person administer basic life support (Cardio-Pulmonary Resuscitation and/or Automatic External Defibrillator) and CALL FOR EMERGENCY SERVICES IMMEDIATELY.

# VINYL CHLORIDE (MONOMER)

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

**SKIN CONTACT:** If frostbite or freezing occur, immediately flush with plenty of lukewarm water (100-105 °F, 38-41 °C). GET MEDICAL ATTENTION IMMEDIATELY.

**EYE CONTACT:** Immediately flush eyes with a directed stream of water for at least 15 minutes, forcibly holding eyelids apart to ensure complete irrigation of all eye and lid tissues. Washing eyes within several seconds is essential to achieve maximum effectiveness. GET MEDICAL ATTENTION IMMEDIATELY.

**INGESTION:** Not a likely route of exposure in occupational environment.

## Most Important Symptoms/Effects (Acute and Delayed) :

**Acute Symptoms/Effects:** Listed below. Prolonged, high concentration exposures may cause unconsciousness or death.

**Inhalation (Breathing):** Respiratory Tract Irritation: rhinitis, scratchy throat, cough, sore throat, runny nose, wheezing, difficulty breathing (dyspnea). Inhalation of this material may cause central nervous system depression (narcotic effects).

**Skin:** Skin Irritation. If spilled on skin, rapid evaporation can cause local frostbite with redness, blistering, and scaling.

**Eye:** Eye Irritation. Rapid evaporation can cause local frostbite with corneal and conjunctival irritation or burns. High concentrations of vapor can cause eye irritation.

**Ingestion (Swallowing):** Ingestion is not a likely route of exposure.

**Other Health Effects:** Narcotic Effects (Central Nervous System Depression): Ataxia or dizziness, drowsiness or fatigue, loss of consciousness, headache, euphoria and irritability, visual or hearing disturbances, nausea, memory loss.

## Delayed Symptoms/Effects:

- Carcinogen: Long term significant occupational overexposure to VCM has been associated with a specific cancer (angiosarcoma of the liver) and is associated with hepatocellular cancer
- Suspected mutagen and suspected of causing reproductive damage
- Repeated exposure can damage the skin (scleroderma), bones (acro-osteolysis) and blood vessels in the hand (Raynaud's Syndrome)
- Scleroderma is characterized by a hardening and tightening of patches of skin
- Raynaud's syndrome is characterized by an exaggerated response to cold temperatures or emotional distress, which can cause numbness, pain or color changes in the fingers or toes

**Interaction with Other Chemicals Which Enhance Toxicity:** Alcohol may enhance toxic effects.

**Medical Conditions Aggravated by Exposure:** Alcoholic Liver Disease. Infectious Hepatitis. Cirrhosis.

**Protection of First-Aiders:** Protect yourself by avoiding contact with this material. Direct contact with liquid may cause frostbite to exposed tissue (eyes, skin, etc.). Use personal protective equipment. Refer to Section 8 for specific personal protective equipment recommendations. At minimum, treating personnel should utilize PPE sufficient for prevention of bloodborne pathogen transmission.

**Notes to Physician:** There is no specific antidote. Treat symptoms with supportive care. Cardiac stimulants such as epinephrine should be avoided in persons overexposed to chlorinated hydrocarbons.

## 5. FIRE-FIGHTING MEASURES

## VINYL CHLORIDE (MONOMER)

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

---

**Fire Hazard:** Severe fire hazard. Vapor/air mixtures are explosive. Vapors or gases may ignite at distant sources and flash back. Containers may rupture or explode if exposed to heat.

**Extinguishing Media:** Stop flow of gas before extinguishing fire. Use carbon dioxide, regular dry chemical, foam or water. Use water spray to keep containers cool.

**Fire Fighting:** Move container from fire area if it can be done without risk. For fires in cargo or storage area: Cool containers with water from unmanned hose holder or monitor nozzles until well after fire is out. If this can't be done, then take the following precautions: Keep unnecessary people away, isolate hazard area and deny entry. Let the fire burn. Withdraw immediately in case of rising sound from venting safety device or any discoloration of tanks due to fire. For tank, rail car or tank truck: Stop leak if possible without personal risk. Let burn unless leak can be stopped immediately. Wear NIOSH approved positive-pressure self-contained breathing apparatus operated in pressure demand mode.

**Hazardous Combustion Products:** Oxides of carbon, Hydrogen chloride, Phosgene

**Sensitivity to Mechanical Impact:** Not sensitive.

**Sensitivity to Static Discharge:** Electrostatic charges may build up during handling and may form ignitable vapor-air mixtures in storage containers. Ground equipment in accordance with industry standards and best practices such as NFPA 77 [Recommended Practices on Static Electricity (2007)] and American Petroleum Institute (API) RP Recommended Practice 2003 [Protection Against Ignitions Arising out of Static, Lightning, and Stray Currents (2008)].

**Lower Flammability Level (air):** 3.6%

**Upper Flammability Level (air):** 33.0%

**Flash point:** -108 °F (-78 °C)

**Auto-ignition Temperature:** 882 °F (472 °C)

**GHS: PHYSICAL HAZARDS:**

- Flammable Gas - Cat. 1 Extremely Flammable
  - Gas Under Pressure - Liquefied
- 

## 6. ACCIDENTAL RELEASE MEASURES

---

**Personal Precautions:**

Isolate hazard area and deny entry. Keep unnecessary and unprotected persons away. Eliminate all sources of heat and ignition. Ventilate closed spaces before entering. Wear appropriate personal protective equipment recommended in Section 8, Exposure Controls / Personal Protection, of the SDS. Refer to Section 7, Handling and Storage, for additional precautionary measures.

---

## VINYL CHLORIDE (MONOMER)

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

### Methods and Materials for Containment and Cleaning Up:

Remove sources of ignition. Ventilate closed spaces before entering. Stop leak if possible without personal risk. Vapors or gases may ignite at distant ignition sources and flash back. See Section 13, Disposal considerations, for additional information.

### Environmental Precautions:

Keep out of water supplies and sewers. Releases should be reported, if required, to appropriate agencies.

## 7. HANDLING AND STORAGE

### Precautions for Safe Handling:

Avoid breathing vapor or mist. Avoid contact with skin, eyes and clothing. Keep away from heat, sparks and flame. Ground any equipment used in handling. Use non-sparking tools and equipment. All energized electrical equipment must be designed in accordance with the electrical classification of the area.

### Safe Storage Conditions:

Store and handle in accordance with all current regulations and standards. Keep container tightly closed and properly labeled. Store in a cool, dry area. Store in a well-ventilated area. Do not enter confined spaces unless adequately ventilated. Avoid heat, flames, sparks and other sources of ignition. May be subject to storage regulations: U.S. OSHA 29 CFR 1910.106. Keep separated from incompatible substances (see below or Section 10 of the Safety Data Sheet).

### Incompatibilities/ Materials to Avoid:

oxidizing agents, oxides of nitrogen, metals, aluminum, aluminum alloys, copper, metal alkyl complexes and alkali metals such as sodium, potassium and their alloys

### GHS: PHYSICAL HAZARDS:

- Flammable Gas - Cat. 1 Extremely Flammable
- Gas Under Pressure - Liquefied

## 8. EXPOSURE CONTROLS / PERSONAL PROTECTION

**Regulatory Exposure Limit(s):** As listed below.

Component	OSHA Final PEL TWA	OSHA Final PEL STEL	OSHA Final PEL Ceiling
Vinyl chloride 75-01-4	1 ppm	5 ppm	-----

OEL: Occupational Exposure Limit; OSHA: United States Occupational Safety and Health Administration; PEL: Permissible Exposure Limit; TWA: Time Weighted Average; STEL: Short Term Exposure Limit

**NON-REGULATORY EXPOSURE LIMIT(S):** As listed below.

Component	CAS Number	ACGIH TWA	ACGIH STEL	ACGIH Ceiling	OSHA TWA (Vacated)	OSHA STEL (Vacated)	OSHA Ceiling (Vacated)

**VINYL CHLORIDE (MONOMER)**

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

Vinyl chloride	75-01-4	1 ppm	-----	-----	-----	-----	-----
----------------	---------	-------	-------	-------	-------	-------	-------

- The Non-Regulatory United States Occupational Safety and Health Administration (OSHA) limits, if shown, are the Vacated 1989 PEL's (vacated by 58 FR 35338, June 30, 1993).

- The American Conference of Governmental Industrial Hygienists (ACGIH) is a voluntary organization of professional industrial hygiene personnel in government or educational institutions in the United States. The ACGIH develops and publishes recommended occupational exposure limits each year called Threshold Limit Values (TLVs) for hundreds of chemicals, physical agents, and biological exposure indices.

**ENGINEERING CONTROLS:** Use closed systems when possible. Provide local exhaust ventilation where vapor may be generated. Ensure compliance with applicable exposure limits.

**PERSONAL PROTECTIVE EQUIPMENT:**

**Eye Protection:** Wear safety glasses with side-shields. If eye contact is likely, wear chemical resistant safety goggles. Provide an emergency eye wash fountain and quick drench shower in the immediate work area.

**Skin and Body Protection:** Wear appropriate chemical resistant clothing.

**Hand Protection:** Wear appropriate chemical resistant gloves. Consult a glove supplier for assistance in selecting an appropriate chemical resistant glove.

**Protective Material Types:** Butyl rubber, Nitrile, Silver Shield®, Viton®

**Respiratory Protection:** Refer to 29 CFR 1910.1017 for selection of respirators for vinyl chloride. A respiratory protection program that meets applicable regulatory requirements must be followed whenever workplace conditions warrant use of a respirator.

**9. PHYSICAL AND CHEMICAL PROPERTIES**

<b>Physical state</b>	Compressed, liquefied gas
<b>Color:</b>	Colorless
<b>Odor:</b>	Sweet
<b>Odor Threshold [ppm]:</b>	Not reliable to prevent excessive exposure.
<b>Molecular Weight:</b>	62.5
<b>Molecular Formula:</b>	C <sub>2</sub> H <sub>3</sub> Cl
<b>Decomposition Temperature:</b>	Not applicable
<b>Boiling Point/Range:</b>	7 °F (-14 °C)
<b>Freezing Point/Range:</b>	No data available.
<b>Melting Point/Range:</b>	Not applicable
<b>Vapor Pressure:</b>	2660 mmHg @ 25 °C
<b>Vapor Density (air=1):</b>	2.15
<b>Relative Density/Specific Gravity (water=1):</b>	0.91 @ 25/25 °C
<b>Water Solubility:</b>	2.7 g/L

## VINYL CHLORIDE (MONOMER)

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

---

<b>pH:</b>	Not applicable
<b>VOC Content (%):</b>	100%
<b>Volatility:</b>	100%
<b>Evaporation Rate (ether=1):</b>	>15
<b>Partition Coefficient (n-octanol/water):</b>	Log Kow = 1.36
<b>Flash point:</b>	-108 °F (-78 °C)
<b>Flammability (solid, gas):</b>	No data available
<b>Lower Flammability Level (air):</b>	3.6%
<b>Upper Flammability Level (air):</b>	33.0%
<b>Auto-ignition Temperature:</b>	882 °F (472 °C)
<b>Viscosity:</b>	Not applicable

---

## 10. STABILITY AND REACTIVITY

---

**Reactivity:** Not reactive under normal temperatures and pressures.

**Chemical Stability:** Stable at normal temperatures and pressures.

**Possibility of Hazardous Reactions:**

Avoid air and sunlight. Avoid heat, flames, sparks and other sources of ignition. Containers may rupture or explode if exposed to heat.

**Conditions to Avoid:**

(e.g., static discharge, shock, or vibration) -. Electrostatic charges may build up during handling and may form ignitable vapor-air mixtures in storage containers. Ground equipment in accordance with industry standards and best practices such as NFPA 77 [Recommended Practices on Static Electricity (2007)] and American Petroleum Institute (API) RP Recommended Practice 2003 [Protection Against Ignitions Arising out of Static, Lightning, and Stray Currents (2008)].

**Incompatibilities/ Materials to Avoid:**

oxidizing agents. oxides of nitrogen. metals. aluminum. aluminum alloys. copper. metal alkyl complexes and alkali metals such as sodium, potassium and their alloys.

**Hazardous Decomposition Products:** oxides of carbon, chlorine, hydrogen chloride, phosgene

**Hazardous Polymerization:** Polymerization can occur. Avoid elevated temperatures, oxidizing agents, oxides of nitrogen, oxygen, peroxides, other polymerization catalysts/initiators, air and sunlight.

---

## 11. TOXICOLOGICAL INFORMATION

---

**TOXICITY DATA:**

**PRODUCT TOXICITY DATA:** VINYL CHLORIDE (MONOMER)

---

**VINYL CHLORIDE (MONOMER)**

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

<b>LD50 Oral:</b> > 4,000 mg/kg oral-rat LD50	<b>LD50 Dermal:</b> -----	<b>LC50 Inhalation:</b> -----
--	------------------------------	----------------------------------

**COMPONENT TOXICITY DATA:**

**Note:** The component toxicity data is populated by the LOLI database and may differ from the product toxicity data given.

Component	LD50 Oral:	LD50 Dermal:	LC50 Inhalation:
Vinyl chloride 75-01-4	-----	-----	18 pph (15 min-Rat)

\*\*\*\*\*

**POTENTIAL HEALTH EFFECTS:**

- Eye contact:** Causes eye irritation. Rapid evaporation of the material may cause frostbite.
- Skin contact:** Causes skin irritation. Rapid evaporation of the material may cause frostbite.
- Inhalation:** May cause respiratory tract irritation. Several minutes of exposure to high, but attainable concentrations (over 1000 ppm) may cause difficulty breathing, central nervous system depression and symptoms such as: ataxia or dizziness, drowsiness or fatigue, loss of consciousness, headache, euphoria and irritability, visual and or hearing disturbances, nausea, memory loss. Prolonged, high concentration exposures may cause unconsciousness or death. Cardiac: Acute intoxication may cause irregular heartbeats.
- Ingestion:** Not a likely route of exposure in occupational settings.
- Chronic Effects:** Chronic exposure to vinyl chloride monomer (VCM) may cause damage to the nervous system, respiratory system, musculoskeletal system, and lymphatic system. Occupational overexposure has produced a specific cancer (angiosarcoma of the liver) and is associated with hepatocellular cancer. Repeated prolonged exposure may damage: skin (scleroderma), bones (acro-osteolysis), blood vessels in the hands (Raynaud's Syndrome). Suspected of causing genetic defects. Suspected of damaging fertility or the unborn child. Reproductive effects and testes damage occurred in rats exposed to vinyl chloride. These endpoints, however, were generally noted at concentrations greater than those necessary to cause liver damage.

**SIGNS AND SYMPTOMS OF EXPOSURE:**

Listed below.

- Inhalation (Breathing):** Respiratory Tract Irritation: rhinitis, scratchy throat, cough, sore throat, runny nose, wheezing, difficulty breathing (dyspnea). Inhalation of this material may cause central nervous system depression (narcotic effects).
- Skin:** Skin Irritation. If spilled on skin, rapid evaporation can cause local frostbite with redness, blistering, and scaling.
- Eye:** Eye Irritation. Rapid evaporation can cause local frostbite with corneal and conjunctival irritation or burns. High concentrations of vapor can cause eye irritation.
- Ingestion (Swallowing):** Ingestion is not a likely route of exposure.

**VINYL CHLORIDE (MONOMER)**

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

**Other Health Effects:** Narcotic Effects (Central Nervous System Depression): Ataxia or dizziness, drowsiness or fatigue, loss of consciousness, headache, euphoria and irritability, visual or hearing disturbances, nausea, memory loss.

**Interaction with Other Chemicals Which Enhance Toxicity:** Alcohol may enhance toxic effects.

**GHS HEALTH HAZARDS:**

**Skin Absorbent / Dermal Route?** No.

**GHS: CONTACT HAZARD - SKIN:** Category 2 - Causes skin irritation

**GHS: CONTACT HAZARD - EYE:** Category 2B - Causes eye irritation

**GHS: CARCINOGENICITY:**  
Category 1A - May cause cancer.

Component	NTP:	IARC (GROUP 1):	IARC (GROUP 2):	OSHA:
Vinyl chloride	Listed	Group 1	Not listed	Listed

**SPECIFIC TARGET ORGAN TOXICITY (Single Exposure):**

Category 3 - Respiratory Tract Irritation

Category 3 - Narcotic Effects

**SPECIFIC TARGET ORGAN TOXICITY (Repeated or Prolonged Exposure):**

Category 1 - Liver, Blood, Nervous System, Lymphatic System, Musculoskeletal System, Respiratory System

**MUTAGENIC DATA:**

Category 2 - Suspected of causing genetic defects. Mutagenic in bacteria studies. Genetic studies in animals were negative in some cases and positive in others.

**REPRODUCTIVE TOXICITY:**

Category 2 - Suspected of damaging fertility or the unborn child. Reproductive effects and testes damage occurred in rats exposed to vinyl chloride. These endpoints, however, were generally noted at concentrations greater than those necessary to cause liver damage.

**12. ECOLOGICAL INFORMATION****ECOTOXICITY DATA:****Aquatic Toxicity:**

This material is believed to be practically non-toxic to fish on an acute basis (LC50>100 mg/L).

**FATE AND TRANSPORT:**

**BIODEGRADATION:** Vinyl chloride may degrade under anaerobic conditions.

## VINYL CHLORIDE (MONOMER)

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

**PERSISTENCE:** Tropospheric half-life is estimated to be 23 hours. If released to air, this material will remain in the gas phase. If released to soil, volatilization will occur, but material that does not volatilize may be highly mobile. If released to water, evaporation will occur.

**BIOCONCENTRATION:** Bioconcentration potential is low (BCF <100 or log Kow <3).

### 13. DISPOSAL CONSIDERATIONS

**Waste from material:**

Reuse or reprocess, if possible. May be subject to disposal regulations. Dispose in accordance with all applicable regulations.

**Container Management:**

Refer to manufacturer/supplier for information on recovery/recycling. Dispose of container in accordance with applicable local, regional, national, and/or international regulations. Container rinsate must be disposed of in compliance with applicable regulations.

### 14. TRANSPORT INFORMATION

#### LAND TRANSPORT

**U.S. DOT 49 CFR 172.101:**

**UN NUMBER:** UN1086  
**PROPER SHIPPING NAME:** Vinyl chloride, stabilized  
**HAZARD CLASS/ DIVISION:** 2.1  
**LABELING REQUIREMENTS:** 2.1  
**RQ (lbs):** RQ 1 Lbs. (Vinyl chloride)

**CANADIAN TRANSPORTATION OF DANGEROUS GOODS:**

**UN NUMBER:** UN1086  
**SHIPPING NAME:** Vinyl chloride, stabilized  
**CLASS OR DIVISION:** 2.1  
**LABELING REQUIREMENTS:** 2.1

**MARITIME TRANSPORT (IMO / IMDG) Regulated**

**UN NUMBER:** UN1086  
**PROPER SHIPPING NAME:** Vinyl chloride, stabilized

**VINYL CHLORIDE (MONOMER)**

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

**HAZARD CLASS / DIVISION:** 2.1  
**LABELING REQUIREMENTS:** 2.1

**15. REGULATORY INFORMATION****U.S. REGULATIONS****OSHA REGULATORY STATUS:**

This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200)

**CERCLA SECTIONS 102a/103 HAZARDOUS SUBSTANCES (40 CFR 302.4):**

If a release is reportable under CERCLA section 103, notify the state emergency response commission and local emergency planning committee. In addition, notify the National Response Center at (800) 424-8802 or (202) 426-2675.

Component	CERCLA Reportable Quantities:
Vinyl chloride	1 lb (final RQ)

**SARA EHS Chemical (40 CFR 355.30)**

Not regulated

**EPCRA SECTIONS 311/312 HAZARD CATEGORIES (40 CFR 370.10):**

Fire Hazard, Reactive Hazard, Sudden Release of Pressure, Acute Health Hazard, Chronic Health Hazard

**EPCRA SECTION 313 (40 CFR 372.65):**

The following chemicals are listed in 40 CFR 372.65 and may be subject to Community Right-to Know Reporting requirements.

Component	Status:
Vinyl chloride	0.1 %

**OSHA SPECIFICALLY REGULATED SUBSTANCES:**

OSHA 29 CFR 1910.1017 (Vinyl chloride); The U.S. Department of Labor, Occupational Safety and Health Administration specifically regulates manufacturing, handling and processing of vinyl chloride. Such regulations have been published at 29 CFR 1910.1017.

**OSHA PROCESS SAFETY (PSM) (29 CFR 1910.119):**

The PSM standard may apply to processes which involve a flammable liquid or gas in a quantity of 10,000 pounds (4535.9 kg) or more.

**NATIONAL INVENTORY STATUS**

**U.S. INVENTORY STATUS: Toxic Substance Control Act (TSCA):** All components are listed or exempt.

**TSCA 12(b):** This product is not subject to export notification.

**Canadian Chemical Inventory:** All components of this product are listed on either the DSL or the NDSL.

**VINYL CHLORIDE (MONOMER)**

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

**STATE REGULATIONS**

Component	California Proposition 65 Cancer WARNING:	California Proposition 65 CRT List - Male reproductive toxin:	California Proposition 65 CRT List - Female reproductive toxin:	Massachusetts Right to Know Hazardous Substance List	New Jersey Right to Know Hazardous Substance List	New Jersey Special Health Hazards Substance List
Vinyl chloride 75-01-4	Listed	Not Listed	Not Listed	Listed	2001	carcinogen; flammable - fourth degree; mutagen

Component	New Jersey - Environmental Hazardous Substance List	Pennsylvania Right to Know Hazardous Substance List	Pennsylvania Right to Know Special Hazardous Substances	Pennsylvania Right to Know Environmental Hazard List	Rhode Island Right to Know Hazardous Substance List
Vinyl chloride 75-01-4	Listed	Listed	Present	Present	Not Listed

**CANADIAN REGULATIONS**

• This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations

**WHMIS - Classifications of Substances:**

- A - Compressed Gas
- B1 - Flammable Gas
- D2A - Poisonous and Infectious Material; Materials causing other toxic effects - Very toxic material
- D2B - Poisonous and Infectious Material; Materials causing other toxic effects - Toxic material
- F - Dangerously reactive material

**16. OTHER INFORMATION**

**Prepared by:** OxyChem Corporate HESS - Product Stewardship

**Rev. Date:** 06-Apr-2015

**HMIS: (SCALE 0-4)** (Rated using National Paint & Coatings Association HMIS: Rating Instructions, 2nd Edition)

**Health Rating:** 2\*

**Flammability Rating:** 4

**Reactivity Rating:** 1

**NFPA 704 - Hazard Identification Ratings (SCALE 0-4)**

**Health Rating:** 2

**Flammability:** 4

**Reactivity Rating:** 2

## VINYL CHLORIDE (MONOMER)

SDS No.: M9192

SDS Revision Date: 06-Apr-2015

---

### Reason for Revision:

- Revised Major Health Hazards: SEE SECTION 2
- Revised GHS Information: SEE SECTION 2
- Updated First Aid Measures: SEE SECTION 4
- PPE recommendations have been modified: SEE SECTION 8
- Toxicological Information has been revised: SEE SECTION 11
- Updated Disposal Considerations. SEE SECTION 13
- Updated Transportation Information: SEE SECTION 14

### IMPORTANT:

The information presented herein, while not guaranteed, was prepared by technical personnel and is true and accurate to the best of our knowledge. NO WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTY OR GUARANTY OF ANY OTHER KIND, EXPRESSED OR IMPLIED, IS MADE REGARDING PERFORMANCE, SAFETY, SUITABILITY, STABILITY OR OTHERWISE. This information is not intended to be all-inclusive as to the manner and conditions of use, handling, storage, disposal and other factors that may involve other or additional legal, environmental, safety or performance considerations, and OxyChem assumes no liability whatsoever for the use of or reliance upon this information. While our technical personnel will be happy to respond to questions, safe handling and use of the product remains the responsibility of the customer. No suggestions for use are intended as, and nothing herein shall be construed as, a recommendation to infringe any existing patents or to violate any Federal, State, local or foreign laws

OSHA Standard 29 CFR 1910.1200 requires that information be provided to employees regarding the hazards of chemicals by means of a hazard communication program including labeling, safety data sheets, training and access to written records. We request that you, and it is your legal duty to, make all information in this Safety Data Sheet available to your employees

---


**End of Safety Data Sheet**



## THE HEAT EQUATION

**HIGH TEMPERATURE + HIGH HUMIDITY + PHYSICAL WORK  
= HEAT ILLNESS**

When the body is unable to cool itself through sweating, **serious** heat illnesses may occur. The most severe heat-induced illnesses are **heat exhaustion** and **heat stroke**. If actions are not taken to treat heat exhaustion, the illness could progress to heat stroke and possible **death**.

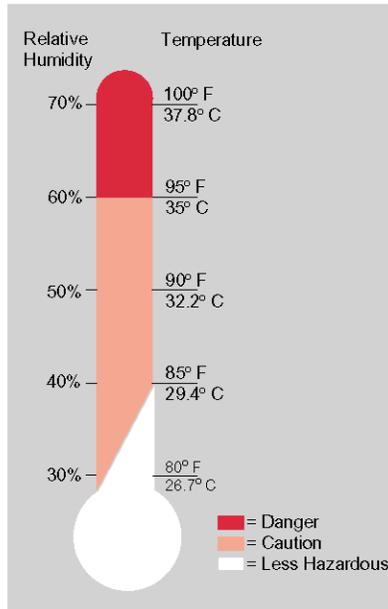

## HEAT EXHAUSTION

### *What Happens to the Body:*

HEADACHES, DIZZINESS/LIGHT HEADEDNESS, WEAKNESS, MOOD CHANGES (irritable, or confused/can't think straight), FEELING SICK TO YOUR STOMACH, VOMITING/THROWING UP, DECREASED and DARK COLORED URINE, FAINTING/PASSING OUT, and PALE CLAMMY SKIN.

### *What Should Be Done:*

- Move the person to a cool shaded area to rest. Don't leave the person alone. If the person is dizzy or light headed, lay them on their back and raise their legs about 6-8 inches. If the person is sick to their stomach lay them on their side.
- Loosen and remove any heavy clothing.
- Have the person drink some cool water (a small cup every 15 minutes) if they are not feeling sick to their stomach.
- Try to cool the person by fanning them. Cool the skin with a cool spray mist of water or wet cloth.
- If the person does not feel better in a few minutes call for emergency help (Ambulance or Call 911).

*(If heat exhaustion is not treated, the illness may advance to heat stroke.)*

## HEAT STROKE—A MEDICAL EMERGENCY

### *What Happens to the Body:*

DRY PALE SKIN (no sweating), HOT RED SKIN (looks like a sunburn), MOOD CHANGES (irritable, confused/not making any sense), SEIZURES/FITS, and COLLAPSE/PASSED OUT (will not respond).

### *What Should Be Done:*

- Call for emergency help (Ambulance or Call 911).
- Move the person to a cool shaded area. Don't leave the person alone. Lay them on their back and if the person is having seizures/fits remove any objects close to them so they won't strike against them. If the person is sick to their stomach lay them on their side.
- Remove any heavy and outer clothing.
- Have the person drink some cool water (a small cup every 15 minutes) if they are alert enough to drink anything and not feeling sick to their stomach.
- Try to cool the person by fanning them. Cool the skin with a cool spray mist of water, wet cloth, or wet sheet.
- If ice is available, place ice packs under the arm pits and groin area.

### **How to Protect Workers**

- Learn the signs and symptoms of heat-induced illnesses and what to do to help the worker.
- Train the workforce about heat-induced illnesses.
- Perform the heaviest work in the coolest part of the day.
- Slowly build up tolerance to the heat and the work activity (usually takes up to 2 weeks).
- Use the buddy system (work in pairs).
- Drink plenty of cool water (one small cup every 15-20 minutes)
- Wear light, loose-fitting, breathable (like cotton) clothing.
- Take frequent short breaks in cool shaded areas (allow your body to cool down).
- Avoid eating large meals before working in hot environments.
- Avoid caffeine and alcoholic beverages (these beverages make the body lose water and increase the risk for heat illnesses).

### **Workers Are at Increased Risk When**

- They take certain medication (check with your doctor, nurse, or pharmacy and ask if any medicines you are taking affect you when working in hot environments).
- They have had a heat-induced illness in the past.
- They wear personal protective equipment (like respirators or suits).

## 1.1 SUBMITTALS

- A. First Environment has prepared the below COVID-19 Management Plan as Attachment 1 of First Environment's Health and Safety Plan
  
- B. First Environment shall develop a one-page summary of site-specific practices for COVID-19 management and clearly display on site. Operating hours, delivery times, and extra considerations for works involving a high volume of personnel or potential for interaction with community members could also be included in the summary.



## ***Environmental Management System Procedures***

### ***Title: First Environment Risk Reduction Policy for Coronavirus***

Since we are in a period of uncertainty regarding the potential impact of the Coronavirus, First Environment is implementing the following requirements.

1. Any employee who is sick (fever, coughing, difficulty breathing) is asked to stay home and seek medical attention. Keep HR informed of the situation.
2. Employees should frequently wash hands for a minimum of 20 seconds (Happy Birthday twice) and use hand sanitizer located throughout the office.
3. Employees are asked to take their computers home **every** night rather than leaving them in the office. This will ensure the capacity to work remotely in the event that governmental actions, such as school closures, or risk reduction actions, such as a high local infection rate, mandate that employees to work remotely.
4. Employees are asked to save **all** files they have worked on to the network at the end of the day.
5. First Environment will be looking closely at travel locations and may make changes to planned business travel.
6. Employees traveling for personal reasons are asked to inform HR of plans and decisions on a possible 14-day quarantine period will be made on a case-by-case basis.
7. We are requiring the cleaning crew to use anti-bacterial and anti-viral cleaning products.
8. Wipes have been purchased for the office and are provided for wiping down surfaces prior to contact.
9. Should offices be closed due to government directives or a management decision, you will be notified by email.

Other Relevant FE Policy:

This includes additional requirements for essential work and applies to work performed at client's sites. First Environment has adopted this policy for work in other states whether or not required by state or local government as it represents best practice. Should state or local regulations contradict any of the requirements in the policy, those requirements supersede the policy. Other requirements in the policy remain valid.

Other guidance:

For latest information, guidance and updates on best practices, consult the

- [Center for Disease Control \(CDC\)](#)
- [World Health Organization \(WHO\)](#)
- [National Institute of Health \(NIH\)](#)

Effective date: 4/16/20

\\Fcdc01\vol2\extest\Westchester County Airport - WESTC028\Official Report Folder\07\_20 Final GW IRM\Appendix B HASP\12.4 General Coronavirus Policy.docx

## First Environment Covid-19 Policy

- a. Non-essential visitors shall be prohibited from entering the worksite;
- b. Worksite meetings, inductions, and workgroups shall be limited to groups of fewer than ten individuals;
- c. Individuals are required to maintain 6 feet or more distance between them wherever possible;
- d. Work start and stop times shall be staggered where practicable to limit the number of individuals entering and leaving the worksite concurrently;
- e. Lunch breaks and work times shall be staggered where practicable to enable operations to safely continue while utilizing the least number of individuals possible at the site;
- f. The number of individuals who can access common areas, such as restrooms and breakrooms, concurrently shall be restricted;
- g. Workers and visitors are required to wear cloth face coverings, in accordance with CDC recommendations, while on the premises, except where doing so would inhibit the individual's health or the individual is under two years of age, and workers are required to wear gloves while on the premises. Businesses must provide, at their expense, such face coverings and gloves for their employees. If a visitor refuses to wear a cloth face covering for non-medical reasons and if such covering cannot be provided to the individual by the business at the point of entry, then the business must decline entry to the individual. Nothing in the stated policy should prevent workers or visitors from wearing a surgical-grade mask or other more protective face covering if the individual is already in possession of such equipment, or if the business is otherwise required to provide such worker with more protective equipment due to the nature of the work involved. Where an individual declines to wear a face covering on the premises due to a medical condition that inhibits such usage, neither the business nor its staff shall require the individual to produce medical documentation verifying the stated condition;
- h. Infection control practices, such as regular hand washing, coughing and sneezing etiquette, and proper tissue usage and disposal are required;
- i. Sharing of tools, equipment, and machinery must be limited to the extent practicable;
- j. Sanitization materials, such as hand sanitizer and sanitizing wipes, shall be provided to workers and visitors; and
- k. High-touch areas like restrooms, breakrooms, equipment, and machinery shall be frequently sanitized.

C. The Daily Health Checklist shall be filled out every day work is performed on site.

### DAILY HEALTH CHECKLIST

Is social distancing being practiced?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Is the tail gate safety meeting held outdoors?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Are remote/call-in job meetings being held in lieu of meeting in person where possible?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Were personal protective gloves, masks, and eye protection being used?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Are sanitizing wipes, wash stations or spray available?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Have any workers/visitors been excluded based on close contact with individuals diagnosed with COVID-19, have recently traveled to restricted areas or countries, or are symptomatic (fever, chills, cough/shortness of breath)?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
<u>Comments:</u>  		

## 1.2 COVID-19 MANAGEMENT PLAN

- A. At a minimum, the COVID-19 Management Plan shall include:
1. Identification of potential exposure pathways and exposure risks associated with work tasks, e.g. activity hazard analysis (AHA).
  2. Identification of local health department contact information and COVID-19 testing sites and procedures.

Westchester County Department of Health  
145 Huguenot St.,  
New Rochelle, N.Y. 10801  
(914) 813-5000

Nearest COVID-19 Testing Site  
White Plains Hospital  
99 Business Park Road  
Armonk, NY, 10504  
APPOINTMENT NEEDED

3. Detailed written description of the onsite personnel protection measures that will be utilized and a detailed explanation of how they will be implemented, monitored, and communicated.

Workers shall wear face coverings/masks when needed which follow all appropriate CDC/Department of Health guidelines. Proximity to other people will be minimized at all times by staying at least 6 feet away except when absolutely required to perform work or ensure worker safety. All work being performed and all currently scheduled future work will be performed outside, away from the community and airport employees. See below for further details in Section 3.2 and following.

4. Detailed written description of measures that will be taken to prevent transmission to or from the surrounding community and how they will be implemented and communicated.

The surrounding community will be protected by having workers at all times in a controlled, secure environment preventing any contact with the surrounding community. Workers will arrive in their vehicles and access the secure area using the communications devices at the gate to gain entrance. Gloves will be worn while using communication devices. Workers will remain in their vehicles to prevent contact until inside secure area.

Should work need to be performed outside the secure area, workers will set up a perimeter around the work area to prevent community members from approaching.

See below for further details in Section 3.2 and following.

5. Procedures to be followed in the event a site worker is diagnosed with or is

suspected of having COVID-19, including identification of all personnel potentially exposed and isolation requirements.

Should a site worker be diagnosed with or is suspected of having COVID-19, all that workers contacts will be traced and notified that they may have been exposed. The worker and all contacted people will be sent home for the quarantine period specified below. Exposed workers will undergo testing to determine if they have contracted COVID-19. For further details, see Section 3.3 G below.

6. Daily cleaning schedules and disinfection procedures per the most recent CDC guidelines.

All site workers shall clean and disinfect all equipment, tools and supplies as specified by the most recent CDC guidelines.

7. Cleaning and disinfection procedures in the event there is/are suspected COVID-19 case(s) among site personnel.

Should a site worker become infected, all tools, equipment and supplies used by that worker shall be cleaned and disinfected using standard cleaning and disinfection techniques, per CDC guidelines.

8. Site access controls and entry/exit procedures.

Site access is governed by Westchester Airport Security.

To enter or exit the site, workers will use the communications devices at the gate by Building 10 to notify security to open the gate remotely. Gloves will be worn while using communications devices.

9. Plan view of points of egress and delivery locations.

- B. The COVID-19 Management Plan must be updated following any issued change(s) in federal, state, or local health agency guidance.

This plan shall be updated as changes in guidance warrant.

### 1.3 PRECONSTRUCTION CONFERENCE

- A. Pre-Construction Conference shall include a review of methods and procedures related to COVID-19 risk management including, but not limited to the following:
  - 1. Review of COVID-19 Management Plan
  - 2. Review infection control procedures
  - 3. Review staff monitoring and reporting requirements.

### PART 2 - PRODUCTS - Not Used

### PART 3 - EXECUTION

#### 3.1 RISK IDENTIFICATION

- A. COVID-19 is a new disease; scientists and health agencies are continuously learning about how it spreads. First Environment shall adjust site policies based on the most up to date government issued guidance regarding transmission.
- B. First Environment shall confirm staff that have worked in locations where quarantine orders are in place, have met the minimum quarantine guidance and do not have symptoms prior to mobilizing to site.
- C. First Environment shall monitor staff daily, including checking, and documenting, temperature with no contact infrared thermometer, to confirm onsite staff do not exhibit COVID-19 symptoms. First Environment shall provide daily reports of those tests upon NYSDEC's request.

#### 3.2 RISK MINIMIZATION

- A. Engineering Controls
  - 1. Increasing ventilation rates of interior workspaces.
  - 2. Access controls, including fences and locking gates.
  - 3. Maintain 6 feet distances, using distance markers where appropriate in the field.
- B. Administrative Controls
  - 1. Continuous and effective communication of administrative controls/requirements to all site personnel and visitors, through the posting of site signage, preparation and distribution of site plans, presented during site meetings, and verbal warnings if necessary.
  - 2. Require that all employees exhibiting any COVID-19 symptom do not enter the site and provide sick leave policies to support this requirement.
  - 3. To minimize face-to-face interaction, the Site's Health & Safety Officer's (or other designated employee) phone number shall be prominently posted and disseminated to project staff to be called for the purpose of site sign in and sign out by all visitors to the site upon arrival and exit. The designated employee will receive entry and exit calls each day and will fill out the site entry/exit log for each site visitor to reduce traffic in site trailer and/or the number of individuals contacting the site access tracking log.
  - 4. Staffing: only those employees necessary to complete critical path task(s) shall be present on-site at any given time. Work shall be scheduled to minimize the density of personnel in any given area at any given time.

5. Working Remotely; employees shall be encouraged to complete work remotely if possible.
6. Face-to-face meetings shall be replaced with video or phone conferences when practicable.
7. Social distancing shall be exercised for face-to-face meetings e.g. daily Health and Safety tailgate meeting. In addition, First Environment shall plan to have multiple meetings (if necessary) to keep the number of participants to a threshold that allows for the practice of social distancing protocol. The Health and Safety officer will keep a record of all present for each meeting on the Health and Safety log.
8. Quarantine staff that have been in contact with a anyone that tested positive and notify NYSDEC immediately.

C. Safe Work Practices

1. First Environment shall employ social distancing protocol for all onsite activities when able.
2. First Environment provide PPE and adequate hand washing stations and hand sanitizer (containing a minimum of 60% alcohol) to allow site personnel and visitors to practice good personal hygiene.
3. First Environment shall provide tissues, paper towels, no-touch trash cans, and disinfectants to maintain site cleanliness.
4. Sharing of tools and heavy equipment shall be limited to the extent practicable; handles of shared tools and equipment shall be sanitized regularly.

D. Personal Protective Equipment

1. Employees shall be provided disposable personal protective equipment (PPE), including gloves, goggles, face shields, face masks, and respiratory protection, as appropriate based on work environment and current recommendations by OSHA and CDC.
2. All PPE must be selected based on hazard to the worker, properly fitted and periodically refitted, consistently and properly worn when required, regularly inspected, maintained, and replaced, as necessary, and properly removed, cleaned, and stored or disposed of, to avoid contamination of self, others, or the environment.
3. PPE worn to prevent transmission of COVID-19 is not to be confused with PPE for protection against site contaminants.
4. PPE must be worn, removed, and disposed of correctly in order to remain effective.
  - a. Face masks should fit snugly but comfortable against the side of the face and over the nose and be secured with ties or ear loops; cloth masks must include multiple layers of fabric, allow for breathing without restriction, and be able to be laundered and machine dried without damage.
  - b. Face masks should be worn consistently and removed without touching eyes, nose, and mouth. An individual should wash their hands after handling a used face mask.
  - c. Cloth face coverings should be sterilized by machine washing between use; disposable face masks shall be disposed of properly after using.
  - d. Gloves are only effective if changed and disposed of frequently, to avoid cross-contamination.

### 3.3 NOTIFICATION OF POTENTIAL OR CONFIRMED INFECTION

- A. First Environment shall notify the Department immediately upon identification of a suspected or confirmed infection of COVID-19. This notification shall comply with HIPAA regulations.
- B. First Environment shall remove an individual suspected to have COVID-19 from the site immediately (to the individuals' hotel or local place of residence if transport home is not immediately feasible), as well as those who have worked in close contact with that individual for extended periods of time (an hour at a time or more) over the previous week. The individual with suspected infection shall contact their health care provider and/or follow local health department testing procedures and protocol.
- C. While in the process of removing an employee exhibiting symptoms, steps should be taken to isolate the individual, place a surgical mask on the individual and inform the local health department and the NYSDEC.
- D. In the event the individual with suspected infection cannot get home right away, they shall isolate in their hotel room (notifying hotel management of their symptoms), contact their health care provider, and/or follow local health department testing procedures and protocol.
- E. In the absence of local health department information, the individual may call the New York State Hotline at 1-888-364-3065.
- F. First Environment shall maintain communication with potentially infected individual(s) and notify the Engineer upon receipt of COVID-19 test results.
- G. Positively infected individuals may return to work at the site after 72 hours of being symptom-free and 7 days of isolation after the first symptoms appeared, or in accordance with the current federal, state, and local guidelines
- H. OSHA recordkeeping requirements at 29 CFR Part 1904 mandate covered employers record certain work-related injuries and illnesses on their OSHA 300 log. COVID-19 can be a recordable illness if a worker is infected as a result of performing their work-related duties. However, employers are only responsible for recording cases of COVID-19 if all the following are met:
  - 1. The case is a confirmed case of COVID-19 (see CDC information on persons under investigation and presumptive positive and laboratory-confirmed cases of COVID-19).
  - 2. The case is work-related, as defined by 29 CFR 1904.5; and
  - 3. The case involves one or more of the general recording criteria set forth in 29 CFR 1904.7 (e.g. medical treatment beyond first-aid, days away from work).

**END OF SECTION**

*This page left intentionally blank*



# PREVENT INFECTION



## Wash your hands and use hand sanitizer

Wash your hands frequently and thoroughly, for a minimum of 20 seconds.


Use hand sanitizer, containing at least 60% alcohol when you are unable to wash your hands with soap and water.



## Cover your cough or sneeze

Cover your mouth and nose when coughing or sneezing. Turn your head away from others, if possible, when sneezing.

Use a paper tissue or your sleeve and not your hand. Dispose of used tissues immediately.

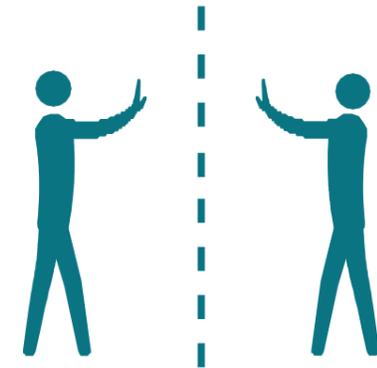

## Limit physical contact

Avoid handshakes, kisses and hugs.

Maintain at least 6 feet from all others persons when possible.



## Keep clean

Regularly sanitize frequently touched and shared surfaces at home as well as at work.



## Be considerate

Stay home whenever possible especially if you are experiencing symptoms.



Department of  
Environmental  
Conservation

# SITE ACCESS RESTRICTIONS



## SITE ACCESS IS PROHIBITED FOR THE FOLLOWING PERSONS DUE TO COVID-19 RISK

- **You are experiencing flu-like symptoms including but not limited to:**

Fever or feeling feverish/chills, cough, sore throat, diarrhea, vomiting, runny or stuffy nose, muscle or body aches, headaches, fatigue (tiredness)

- **You have traveled to CDC-restricted destinations during the last 2 weeks:**

China, South Korea, Iran, United Kingdom & Ireland, all European Union countries, Switzerland and regions within the U.S. for which public health agencies have prohibited travel

- **You had direct contact with a person diagnosed with COVID-19 or suspected of having COVID-19 during the last 2 weeks**

Immediately notify NYSDEC site management.



Department of  
Environmental  
Conservation

## **APPENDIX C**

**Community Air Monitoring Plan (CAMP)  
Westchester County Airport  
240 Airport Road  
White Plains, New York**

**September 2020**

**Prepared for: Westchester County  
240 Airport Road  
White Plains, New York 10601**

**Prepared by: First Environment, Inc.  
10 Park Place  
Building 1A, Suite 504  
Butler, New Jersey 07405**



## TABLE OF CONTENTS

Introduction .....	1
Scope-of-Work .....	2
Air Monitoring Procedures .....	3
Intrusive Activities.....	3
Particulate Monitoring, Response Levels, and Actions .....	3
VOC Monitoring, Response Levels, and Actions .....	3
Non-intrusive Activities .....	4
VOC Monitoring, Response Levels, and Actions .....	4
Weather Monitoring.....	5

## TABLES

TABLE 1 - Tasks Requiring CAMP.....	2
-------------------------------------	---

## Introduction

In addition to the precautions outlined in the Health and Safety Plan, the following measures will be taken to evaluate and control, as necessary, potential fugitive particulates and volatile organic compounds (VOC) generated during both ground intrusive and non-intrusive activities. Accordingly, the following Community Air Monitoring Plan (CAMP) was developed using the New York State Department of Health Generic Community Air Monitoring Plan in combination with site-specific information and proposed activities.

Depending on the type of activity, the levels of airborne particulates and/or VOCs will be monitored and recorded in real-time at both the upwind and downwind perimeters of the immediate work area. The purpose of the CAMP is to protect the downwind community from potential release of contaminants to the air generated during the activities. The action levels developed by the NYSDOH will be followed as part of the CAMP.

If the recorded levels approach pre-established action levels, or if airborne particulates are visually observed migrating off site or towards sensitive receptors, suppression measures will be implemented immediately. Suppression measures may include misting the particulate source with water, use of particulate suppression materials, wetting the work area prior to initiating the activities, or stopping work activities until recorded levels fall below the action level.

# Scope-of-Work

This CAMP addresses the activities that will occur at the Westchester County Airport including the following:

1. Lining of selected portions of the storm sewer system.
2. Installation of soil borings and/or monitoring wells.
3. Collection of soil and groundwater samples.

**Continuous monitoring** will be required for those activities considered ground intrusive. Intrusive activities at the Site include installation of soil borings and monitoring wells.

**Periodic monitoring** for volatile organic compounds (VOCs) will be required during non-intrusive activities. Non-intrusive activities at the Site will include the lining of selected portions of the storm sewer system and the collection of groundwater samples from existing on-site monitoring wells. "Periodic" monitoring may consist of recording a reading upon arrival at a sample location while opening a well cap or overturning soil, monitoring during well bailing/purging, and taking a reading prior to leaving a sample location.

Table 1 presents a summary of the various tasks during the course of Site Characterization and IRM activities and the associated monitoring requirements.

**TABLE 1 - Tasks Requiring CAMP**

TASK NO.	TASK DESCRIPTION	ACTIVITY TYPE	MONITORING FREQUENCY
1	Lining Selected Portions of the Storm Sewer	Non-Ground Intrusive	N/A for Particulates; Periodic for VOCs
2	Subsurface Investigation Installation	Ground Intrusive	Continuous for Particulates and VOCs
3	Groundwater Sampling	Non-Ground Intrusive	N/A for Particulates; Periodic for VOCs

# Air Monitoring Procedures

## Intrusive Activities

### ***Particulate Monitoring, Response Levels, and Actions***

Particulate concentrations will be monitored continuously at the upwind and downwind perimeters of the Site at temporary particulate monitoring stations. The particulate monitoring will be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 microns in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level (Thermo MIE pDR-1000 or equivalent). The equipment will include an audible alarm or other means of alerting the operator to indicate exceedance of the action level. In addition, fugitive dust migration will be visually assessed during all work activities.

- If the downwind PM-10 level is 100 micrograms per cubic meter (mcg/m<sup>3</sup>) greater than background (upwind perimeter) for the 15-minute period, or if airborne dust is observed leaving the work area, then dust suppression techniques will be employed. Work will continue with dust suppression techniques provided that downwind PM-10 levels do not exceed 150 mcg/m<sup>3</sup> above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 levels are greater than 150 mcg/m<sup>3</sup> above the upwind level, work will be stopped and a re-evaluation of activities initiated. Work will resume provided that dust suppression measures and other controls are successful in reducing the downwind PM-10 concentration to within 150 mcg/m<sup>3</sup> of the upwind level and in preventing visible dust migration.

All readings will be recorded and be available for State (DEC and DOH) personnel to review.

### ***VOC Monitoring, Response Levels, and Actions***

The VOC monitoring for intrusive activities will be conducted on a continuous basis and will follow the same response levels and actions for VOCs as outlined below. The measurements will be collected from the immediate work area using a MiniRAE 2000 photoionization detector or equivalent.

VOCs will be continuously monitored at the downwind perimeter of the work area, or exclusion zone, during storm sewer lining and soil boring and well installation activities using a MiniRAE 2000 photoionization detector or equivalent. Upwind measurements will also be collected prior

to the start of work each day and periodically throughout the day at locations away from the work areas to establish background conditions. A minimum of three background measurements will be collected daily. The monitoring work will be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment will be calibrated at least daily against a standard VOC calibrations gas appropriate for the contaminants of concern and for concentrations which will be comparable to the levels specified below. The monitoring, response levels, and actions for VOCs are as follows:

- If the ambient air concentration of total organic vapors in the work area exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities will be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities will resume with continued monitoring.
- If total organic vapor levels in the work area persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities will resume provided that the total organic vapor level 200 feet downwind of the Site or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less – but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shut down.

## **Non-intrusive Activities**

Based on the tasks requiring a CAMP presented in Table 1 above, the two non-intrusive activities to be performed are lining selected portions of the storm sewer system and groundwater sampling, which will not require particulate monitoring. Periodic monitoring for VOCs will be conducted during groundwater sampling activities.

### ***VOC Monitoring, Response Levels, and Actions***

The VOC monitoring for non-intrusive activities will be conducted on a periodic basis and will follow the same response levels and equipment for VOCs as outlined above. The measurements will be collected from the exclusion zone using a MiniRAE 2000 photoionization detector or equivalent.

Periodic VOC monitoring will consist of taking readings prior to the initiation of work at each well location, during bailing and purging activities, and prior to leaving each monitoring well location. Upwind concentrations will also be measured at the start of each workday and periodically thereafter to establish background conditions. The equipment will be calibrated at least daily

against a standard VOC calibrations gas appropriate for the contaminants of concern and for concentrations which will be comparable to the levels specified below. The monitoring, response levels, and actions for VOCs are as follows:

- If the ambient air concentration of total organic vapors in the work area exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities will be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities will resume with continued monitoring.
- If total organic vapor levels in the work area persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities will resume provided that the total organic vapor level 200 feet downwind of the Site or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less – but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shut down.

### ***Weather Monitoring***

In order to identify the specific upgradient and downgradient sampling locations, meteorological data will be collected three times daily from a Davis Remote weather station, or equivalent, for barometric pressure, temperature, humidity, rainfall, and wind speed and direction.

## **APPENDIX D**

# **Quality Assurance Project Plan Westchester County Airport White Plains, New York**

**September 2020**

**Prepared for: Westchester County  
240 Airport Road  
White Plains, New York 10601**

**Prepared by: First Environment, Inc.  
91 Fulton Street  
Boonton, New Jersey 07005**



## TABLE OF CONTENTS

Introduction .....	1
Purpose .....	2
Scope and Goals Relation to Interim Remedial Measure (IRM) .....	3
Data Quality Objectives .....	3
Project Organization and Responsibilities .....	6
NYSDEC Project Manager .....	6
The Westchester County Airport.....	6
First Environment, Inc.....	7
Subcontractors .....	7
Analytical Procedures.....	9
Field Procedures .....	9
Changes in Procedure.....	9
Acquisition of Samples .....	10
Calibration Procedures .....	11
Field Sampling Procedures.....	11
Laboratory Analysis .....	12
Groundwater Level Measurements.....	13
Groundwater Sampling.....	13
Determination of Casing Volume.....	13
Purging .....	14
Sampling.....	15
Decontamination Procedures .....	16
Waste Handling Procedures .....	17
Field Quality Control Procedures .....	18
Field Duplicates.....	18
Field Blanks.....	18
Chain-of-Custody Procedures and Sample Storage.....	20
Data Reduction, Evaluation, and Reporting.....	21
Corrective Actions.....	24

TABLES

Table 1: Levels of Quality Assurance ..... 4  
Table 2: Method References, Holding Times and Preservation Requirements ..... 9

FIGURES

Figure 1: Organization Chart ..... 8

ATTAHMENTS

- Attachment 1 PFC Sampling Checklist
- Attachment 2 Monitoring Wells Sample Protocol

# Introduction

This Quality Assurance Project Plan (QAPP) has been developed as part of the IRM Work Plan that has been prepared on behalf of the Westchester County Airport (the Airport), located at Airport Road, White Plains, New York.

## Purpose

The purpose of this QAPP is to indicate the prime responsibilities of the Airport and its contractors and subcontractors during implementation of the IRM Work Plan. This QAPP also describes the policy, organization, and specific Quality Assurance (QA) and Quality Control (QC) elements necessary to achieve data quality objectives and fulfill NYSDEC requirements. The QAPP also provides detailed descriptions of the field procedures that will be used during IRM.

In general, there are 10 elements to be addressed in a QAPP to ensure safe, efficient, and effective practices are implemented at contaminated sites. These elements include:

1. The project's scope and complexity and how the project relates to the overall IRM strategy.
2. The data quality objectives specific to the site and sampling event.
3. Project organization, including the name and telephone number of each of the individuals responsible for overall project coordination, sampling activities, and laboratory analyses.
4. An "Analytical Methods/Quality Assurance Summary Table" (combination of Table 2 and Table 3).
5. A detailed description of the site-specific sampling methods, sample storage in the field, and sampling holding times requirements.
6. A detailed description of all calibration and preventative maintenance procedures for all field instrumentation.
7. A detailed description of the criteria and procedures to obtain duplicate and split samples.
8. A detailed description of the chain-of-custody procedures to be utilized in the field and the laboratory.
9. A detailed description of sample storage procedures to be utilized by the laboratory.
10. Laboratory data deliverable formats to be used.

# Scope and Goals Relation to Interim Remedial Measure (IRM)

The scope of the project involves addressing:

- Sampling and laboratory analysis of surface and groundwater media at the Airport to identify per- and polyfluoroalkyl substances (PFAS), including perfluorooctanoic acid (PFOA) and perfluorooctane sulfonic acid (PFOS), in addition to iron dissolved in surface water below the mounded area.

## Data Quality Objectives

In order to ensure that data generated during the IRM sampling is of the highest quality, the analytical results of such sampling will be compared to appropriate data quality indicators.

These indicators include precision, accuracy, representativeness, completeness, and comparability. Each of these indicators is described below:

1. Precision is the agreement or reproducibility among individual measurements on the same property, usually made under the same conditions.
2. Accuracy is the degree of agreement of a measurement with the true or accepted value.
3. Representativeness is the degree to which a measurement accurately and precisely represents a characteristic of a population, parameter, variations at a sampling point, a process condition, or an environmental condition.
4. Completeness is a measure of the amount of valid data obtained from a measurements' system compared with the amount that was expected to be obtained under correct and normal conditions.
5. Comparability is an expression of the confidence with which one data set can be compared with another data set with regard to the same parameter.

The data quality objectives (DQO) vary according to the specific objectives of each task that is being undertaken. For example, accuracy, precision, and representativeness of data are functions of sample origin, analytical procedures, and specific sample matrices. Quality control practices for the evaluation of these data quality indicators include the use of accepted analytical procedures, adherence to holding times, and the analysis of QC samples (blanks, duplicates, spikes, calibration standards, and reference standards).

Completeness is a function of the number of valid data results generated compared to the number of data results planned. Completeness can be less than 100 percent due to poor sample recovery, sample damage, or disqualification of results due to results being outside of laboratory control limits. Completeness is documented by including sufficient information in field logs and laboratory reports to allow the data user to assess the quality of the results. The overall completeness goal for each task is difficult to determine prior to data acquisition.

However, all reasonable attempts will be made for this project to attain a completeness of 85 percent or better. The completeness goal for the analytical laboratory will be 90 percent or greater.

Comparability is a function of the analytical and field methodologies used. Ensuring comparable data will be accomplished by using standard and accepted methodologies; using methods traceable to the National Institute of Standards and Technologies (NIST), NYSDEC sources or USEPA sources; using appropriate levels of quality control; reporting results in consistent standard units of measure; and participating in studies designed to evaluate laboratory performance.

Table 1 identifies the different levels of quality assurance that are being assigned to each task that will be implemented during the IRM.

**Table 1: Levels of Quality Assurance**

DQO Level	Description	Associated Activity
I	Level I is the lowest quality data but provides the fastest and least expensive results. Field screening or analysis provides Level I data. The generated data can indicate the presence or absence of certain constituents and is generally qualitative rather than quantitative.	<ul style="list-style-type: none"> <li>• Health and Safety Monitoring (PID, FID)</li> </ul>
II	Level II data are generated by field laboratory analysis using more sophisticated portable laboratory instruments or a mobile laboratory on site. This provides fast results and better-quality data than in Level I.	<ul style="list-style-type: none"> <li>• Field Analyses (pH, specific conductance, temperature, dissolved oxygen)</li> </ul>
III	Level III data may be obtained by a commercial laboratory with or without CLP procedures. The analysis does not usually use the validation or documentation procedures required of CLP (Level IV) analysis. The analyzed parameters are relevant to the IRM, risk assessment, and design and implementation of the remedial action.	<ul style="list-style-type: none"> <li>• Ongoing Groundwater sampling</li> <li>• Waste Classification Sampling</li> </ul>
IV	Level IV data are typically used for risk assessment, engineering design, and cost-recovery documentation. All analyses are performed in a CLP analytical laboratory and follow CLP procedures. Level IV is characterized by rigorous QC protocols, documentation, and detection limits.	<ul style="list-style-type: none"> <li>• Post-excavation soil sampling</li> <li>• Soil sampling for soil reuse</li> <li>• Final Groundwater sampling</li> </ul>

<b>DQO Level</b>	<b>Description</b>	<b>Associated Activity</b>
V	Level V data are those obtained by non-standard analytical procedures. Method development or modification may be required for specific constituents or detection limits.	<ul style="list-style-type: none"> <li>• Not Applicable</li> </ul>
VI	Other methodologies not described above.	<ul style="list-style-type: none"> <li>• Physical soil description</li> <li>• Geotechnical tests</li> <li>• Water level measurements</li> <li>• Aquifer tests</li> </ul>

## **Project Organization and Responsibilities**

First Environment and a qualified team of subcontractors will perform the work activities for this IRM Work Plan under the direction of representatives from the Airport. The lead regulatory agency for this project is the NYSDEC with the New York State Department of Health (NYSDOH) providing additional regulatory oversight. First Environment is the primary contractor.

All respective roles for the Airport, First Environment, and other appropriate project personnel are described below. The project organization chart for the IRM work is shown in Figure 1.

### **NYSDEC Project Manager**

The NYSDEC Project Manager assigned to this project is Mr. Matthew Hubicki. Mr. Hubicki can be contacted at:

New York State Department of Environmental Conservation  
Division of Environmental Remediation  
625 Broadway  
Albany, NY 12233-7014  
Phone: (518) 402-9605  
Fax: (518) 402-9679  
E-mail: [matthew.hubicki@dec.ny.gov](mailto:matthew.hubicki@dec.ny.gov)

### **The Westchester County Airport**

The Airport has the overall responsibility for achieving all project objectives. First Environment will be responsible for initiating project activities; monitoring and adjusting efforts and resources as needed to assure that established schedules, work programs, and costs are maintained; and interfacing with NYSDEC on administrative matters.

WSP will also be responsible for retaining a NYSDOH-certified Environmental Laboratory Approval Program (ELAP) and Contract Laboratory Program (CLP) laboratory. All samples will be submitted to the chosen laboratory under the chain-of-custody procedures discussed below. In addition, the Airport will be responsible for retaining an appropriately licensed and certified waste transporter and disposal subcontractor for disposal of all the IRM-derived wastes. All wastes generated at the Site will be disposed of in accordance with NYSDEC requirements.

The Airport's primary project contact, business address, and telephone number are:

Peter F. Scherrer, Airport Manager  
240 Airport Road, Suite 202  
White Plains, New York 10604  
Phone: (914) 995-4887  
E-mail: [pfs5@westchestergov.com](mailto:pfs5@westchestergov.com)

## **First Environment, Inc.**

First Environment, Inc. will be the prime contractor implementing the IRM. The project responsibilities of First Environment personnel shall be as follows:

**B. Tod Delaney, Ph.D., P.E., BCEE** is the President of First Environment and will act as the Senior Scientist and Senior Project Manager. Dr. Delaney will provide senior management oversight and provide technical advice and review of all IRM-related issues. Dr. Delaney has the responsibility of ensuring and overseeing the preparation of all deliverables, staffing, scheduling, coordinating subcontractors, and overseeing all technical project activities.

**Mr. Scott R. Green, P.G.** is a Market Area Director at First Environment and will act as the Project Manager. Mr. Green will be responsible for the day-to-day project operations, preparation of all deliverables, coordinating subcontractors, and the implementation and oversight of all work being performed in the field. Mr. Green will be responsible for oversight of all Health and Safety issues during the field activities.

All of the First Environment employees can be contacted at:

First Environment, Inc.  
91 Fulton Street  
Boonton, New Jersey 07005  
Phone: (973) 334-0003  
Fax: (973) 334-0928

## **Subcontractors**

First Environment is in the process of obtaining subcontractors to perform the various duties associated with the IRM. To date, the following Subcontractors have been contracted to perform IRM services:


Soil, Groundwater, Sediment and Surface Water Sampling  
WSP USA  
4 Westchester Park Drive, Ste. 175  
White Plains, New York 10604  
914-694-5711

Analytical Laboratory  
York Analytical Laboratories  
120 Research Drive  
Stratford, CT 06615

Licensed Well Driller  
Summit Drilling  
81 Chimney Rock Road  
Bridgewater, NJ 08807

Land Surveyor  
Stires Associates, PA  
43 West High Street  
Somerville, NJ 08876

**Figure 1: Organization Chart**

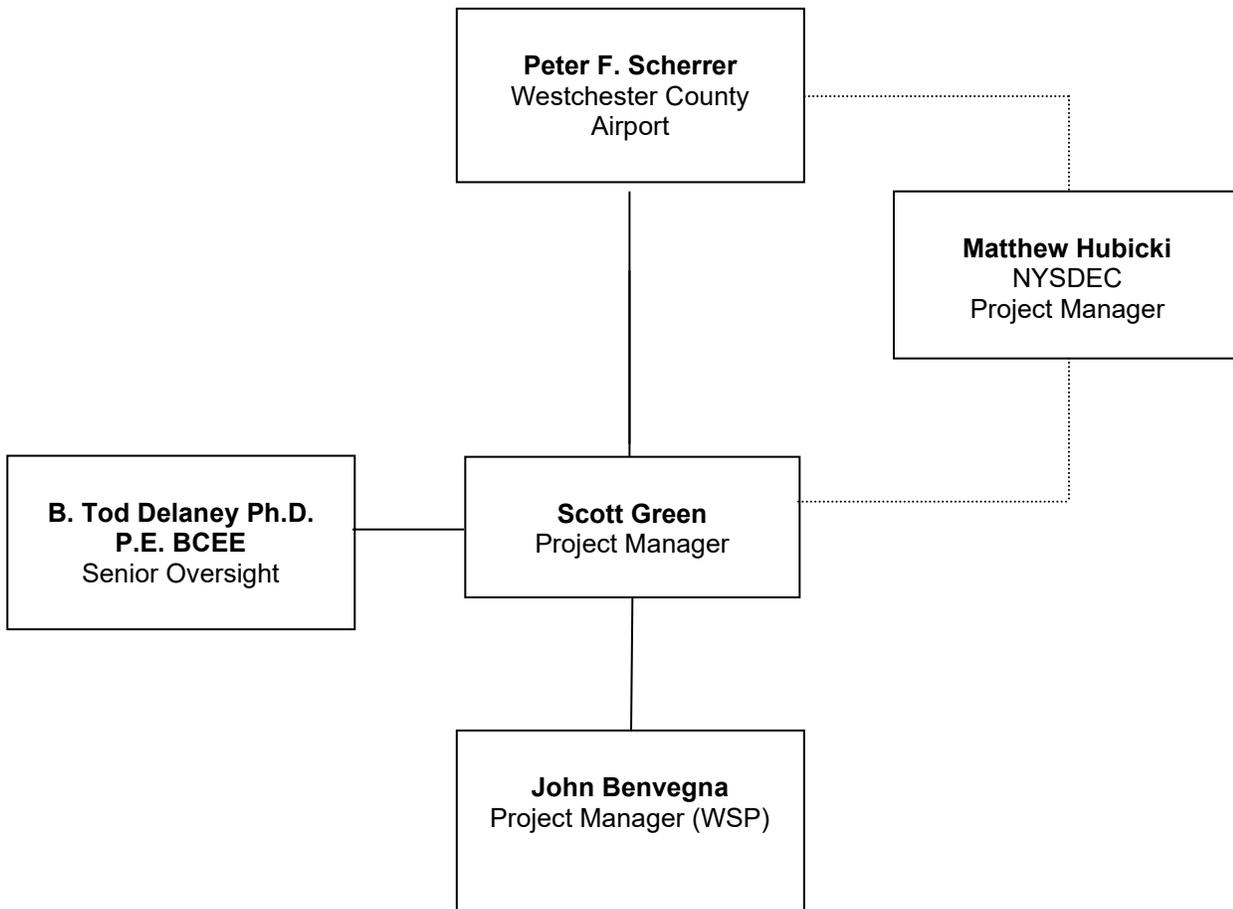

## Analytical Procedures

Method references for the analyses to be performed during the IRM are summarized in Table 2.

**Table 2: Method References, Holding Times and Preservation Requirements**

Parameters	Matrix	Method Reference	Holding Time	Preservation	Sample Volume	DQO Level
PFAS	Aqueous	USEPA Modified Method 537	14 days	4° C,	250 ml HDPE or polypropylene bottle	III/IV
Metals	Aqueous	SW846 6010C	6 months	4° C, HNO3	250 ml PE jar	III/IV
Dissolved Oxygen	Aqueous	Electrode	Immediate	N/A	N/A	II
Temperature	Aqueous	Thermometer	Immediate	N/A	N/A	II
Turbidity	Aqueous	Electrode	Immediate	N/A	N/A	II
Specific Conductivity	Aqueous	Electrode	Immediate	N/A	N/A	II
Organic Vapor	Air	PID or FID	Immediate	N/A	N/A	I
PH	Aqueous	Electrode	Immediate	N/A	N/A	I

\* If sample is not collected using an EnCore™ sampling device

\*\* For Mercury samples only

\*\*\*Sample to be collected via Summa canister

## Field Procedures

The accuracy of the data is dependent upon well-conceived and carefully implemented sampling and analysis procedures. This section presents the procedures with which samples will be collected or measurements made during the execution of this project.

## Changes in Procedure

Field conditions may require changes to the QAPP. Significant changes to the sampling procedures specified in the QAPP that become necessary as a result of unanticipated field conditions will be identified to and discussed with the First Environment Project Manager and WSP Project Manager prior to the implementation of any revised procedure. The Project Managers will in turn discuss the needed changes in procedure with the NYSDEC Project Manager. Changes in sampling procedures cannot be implemented unless approval is received from the NYSDEC Project Manager. Minor changes may be made with the concurrence of the First Environment Senior Project Manager but must be documented in the field logbook and/or interoffice memoranda. Any and all changes in sampling procedures will also be documented in the associated report submittal.

## Acquisition of Samples

Figures 7 and 8 show a site map of the groundwater monitoring well and surface water samples to be collected.

All samples will be adequately marked for identification from the time of collection and packaging through handling and storage. Marking for sample identification shall be on a sample label attached to each sample container. Sample identification will include, at a minimum, the following:

- sample identification number;
- analysis required;
- sample date and time; and
- initials of the individual performing the sampling.

A description of the sample will be included in the field logbook.

Alphanumeric codes will be used to identify sample locations. The coding for sample identification numbers should be consistent, identify a single sample location and, unless otherwise directed, use the following naming convention:

FMW-XX	Monitoring Well
TW-XX	Temporary well point
RW-XX	Recovery Well
SB-XX	Soil/Geoprobe Boring
TP-XX	Test Pit
S-XX	Surface soil sample location
Sed-XX	Sediment
OF-XX	Outfall
D-	Drain/Storm Sewer
SWS-XX	Surface water sampling location
WCS-XX	Soils Waste Classification
WCW-XX	Water Waste Classification

Where XX is a numerical value.

The laboratory will provide appropriately cleaned and prepared sample containers. Reagents, preservation procedures, and analytical holding times will be in accordance with the published analytical methods.

The specific requirements for sample container preparation, sample preservation, holding times, and any special handling requirements are listed in Table 2. Sample containers will be kept closed until the time each set of sample containers is to be filled. After filling, the sample containers will be securely closed, residue wiped from the sides of the containers, sample identification marked on the container label, and the container immediately placed in a cooler that contains ice. Samples will be kept chilled and delivered to or picked up by the laboratory. Samples of dissimilar matrices will be shipped in separate coolers whenever possible. All reasonable effort will be used to limit the time the sample containers are on the Site to no more than two calendar days.

## **Calibration Procedures**

Laboratory calibration procedures and frequency of calibration will be completed in accordance with the NYSDOH ELAP criteria. These criteria represent accepted techniques to ensure accurate sampling, monitoring, testing, and documentation as per QA/QC standards. Field instruments such as pH meters, dissolved oxygen meters, and specific conductivity meters will be standardized in accordance with the manufacturer's recommendations against National Institute of Standards and Technology (NIST) traceable standards, where appropriate. During sampling, calibration will be performed at the beginning of each day of use. Appropriate calibration records will be maintained in field logbooks.

Samples that do not contain concentrations of target analytes that exceed instrument calibration range, absent of matrix interference, will be analyzed so as to achieve the lowest practical quantitation limits. Samples that do contain concentrations of target analytes that exceed the instrument calibration range will be diluted in accordance with approved methodologies and good laboratory practice.

## **Field Sampling Procedures**

Field screening will be used to obtain immediate site data that can be used to ensure the health and safety of site workers and/or assist in the selection of soil and groundwater sampling locations and depths. Subsurface characterization involves the collection of samples for

analysis by the laboratory. The results generated from these sample analyses will be used to characterize and monitor site conditions. The components of the IRM include:

- groundwater sampling, and
- surface-water sampling.

Field sampling procedures when sampling for PFAS will be completed in accordance with the attached sampling protocol and checklist for sampling monitor wells for PFC's Attachment 1 and 2. Items like water proof field notebooks, blue ice packs, Teflon containing materials, Gore-Tex fabrics, Tyvek are only few of the items that will be avoided due to the potential presence of PFAS in those items that could interfere with the laboratory results.

Water level monitoring will be completed using a Heron dipper model-T water level indicator which has a steel sensing probe. All wells will be sampled with dedicated, disposable HDPE bailers. Shallow wells (less than 20 feet deep) will also be purged using dedicated disposable HDPE bailers. Wells greater than 20 feet deep will be purged with a PFAS free submersible pump and dedicated HDPE tubing. All purge water will be discharged to the ground upon the completion of sampling per previous NYSDEC correspondence of October 10, 2017 unless a sheen, odors, or oil are observed. In such cases, purge water will be containerized and characterized for proper disposal.

During sampling for PFAS, one field blank will be collected in the field using water provided by the laboratory. One field duplicate and one matrix spike/matrix spike duplicate will also be collected. All samples will be collected in laboratory supplied containers and placed in coolers on wet ice for overnight shipping to the laboratory or until laboratory pick up. Appropriate chain-of-custody procedures will be followed.

### ***Laboratory Analysis***

The samples will be picked up by York Analytical Laboratories, which is a New York State Certified ELAP laboratory. The samples will be analyzed for PFAS by EPA method 537 (modified) and for iron SW846 6010C with Category B deliverables. The data will be provided in an electronic data deliverable (EDD) format for the NYSDEC EQUIS Environmental Data Management System.

The field sampling activities for PFAS will follow the PFCs Sampling Checklist identified as Attachments 1 and 2.

## **Groundwater Level Measurements**

Groundwater levels will be measured during the IRM. Synoptic (instantaneous) groundwater level measurements will be collected from all accessible wells and piezometers concurrently with all on-site groundwater sampling events. Groundwater level measurements will be made using an electronic water level meter or equivalent. The water level meter will be field decontaminated prior to use and between measurements at each well location. Measurements to the depth-of-water will be made to the nearest 0.01-foot relative to the northernmost point at the top of the casing elevation. This measurement will be converted to a groundwater elevation based upon the surveyed casing elevation.

## **Groundwater Sampling**

Groundwater sampling of any one monitoring well will be performed no sooner than two weeks following the development of that monitoring well unless otherwise approved by the NYSDEC. Groundwater sampling at permanent wells for any one sampling event will consist of determining the casing volume, purging, and sample collection. These procedures are described below. If necessary, a peristaltic pump may be used to develop the temporary well to reduce turbidity before collecting a groundwater sample for laboratory analysis. Once turbidity is reduced, a groundwater sample will be collected for laboratory analysis and submitted to the certified laboratory.

### ***Determination of Casing Volume***

Casing volume will be determined by measuring the water level in each monitoring well and utilizing well construction information to calculate the volume of standing water in the well. An electronic water level indicator will be used to measure the depth from the top of the innermost casing to the water table to the nearest 0.01 feet. The water level indicator will be decontaminated using phosphate-free detergent and distilled or deionized water prior to its use in any one monitoring well. The depth to the bottom of the monitoring well will be determined during the first sampling event to confirm well construction details. The measurement will be taken with a field-decontaminated electronic water level indicator and recorded to the nearest 0.01 feet.

## ***Purging***

One of two groundwater purge techniques may be applied at this Site. The first method is low-flow purge method. This method minimizes data quality interference by suspended solids by purging groundwater at such a low rate so as not to cause sediment in the well to become suspended. To ensure that pore water and not casing water is sampled upon completion of purging, groundwater is purged until several indicator parameters become stable. This technique is described in detail by Puls and Barcelona (“Low-flow (minimal drawdown) groundwater sampling procedures.” EPA/540/S-95/504; April 1996).

If a low-flow purging technique is used, then groundwater will be extracted at a rate that is equal to or less than one liter per minute. Water level will be checked periodically during purging to monitor drawdown and to guide flow rate adjustment. The flow rate will be adjusted to achieve a minimal drawdown that does not exceed 0.1 meters (four inches).

If necessary, in-line water quality will be monitored during purging using a flow-through cell. The water quality indicator parameters that will be monitored will include pH, conductivity, dissolved oxygen (DO), and turbidity. Measurements will be taken every three to five minutes until water quality has stabilized. Stabilization is achieved when three successive readings are within  $\pm 0.1$  for pH,  $\pm 3$  percent for conductivity, and  $\pm 10$  percent for turbidity and DO.

If the low-flow purge technique is not used, then three to five casing volumes of water will be purged from the monitoring wells. The wells will be purged using PFAS free positive displacement pumps such as a submersible pump. A bottom-filled HDPE bailer may also be used to purge a well. If a submersible pump is used, then the pump and power cord will be decontaminated prior to each use using the methods described later in this document. New HDPE polyethylene tubing will be attached to the submersible pump to discharge water from the monitoring well. The tubing will be discarded after use at a monitoring well.

If a well or piezometer diameter is such that a positive displacement pump is not used, a peristaltic pump with dedicated thin HDPE plastic tubing will be used to purge the required volume.

The field parameters pH, specific conductance, temperature, and DO will be measured and recorded prior to purging the monitoring well. During purging, all reasonable effort must be made to keep the purging rate low and to avoid pumping the well to dryness. Monitoring well

purging rates will not exceed five gpm. In some cases the evacuation of three casing volumes may not be practical due to slow recovery. If a monitoring well is pumped to near dryness at a rate less than 0.5 gpm, then the monitoring well will be allowed to recover to a volume sufficient for sampling. Sampling will occur within two hours of purging, as long as the well has sufficiently recovered. It may be necessary to allow all such monitoring wells to recover sufficiently for sampling. Details of the monitoring well's recovery rate will be noted on the field form.

The following monitoring well purge data will be recorded on the field form for each monitoring well sampled whenever the "3 to 5 volume" purge method is used:

Before Purging:

- date, time, and whether conditions;
- monitoring well identification number;
- pH, DO, temperature, and specific conductivity;
- total monitoring well depth and depth-to-water from the top of the innermost casing; and
- water volume within the monitoring well.

After Purging

- start and end time of purging;
- purge method;
- purge rate (if pumped);
- total volume purged; and

After Sampling

- start and end time of sampling;
- pH, DO, temperature, and specific conductivity;
- sampling method;
- pertinent observations regarding sample characteristics (e.g., turbidity, color, odor).

**Sampling**

If the low-flow purge method is used, then sampling will involve disconnecting the intake hose from the flow-through cell and then using that hose to discharge the sample directly into containers provided by the laboratory.

If the “3 to 5 volume” purge method is used, monitoring well sampling will be performed within two hours of purging unless, as stated earlier, a monitoring well recovers at too slow a rate. Sampling will be performed with a dedicated clean HDPE bailer with a single check valve at the bottom.

To obtain a sample, the bailer will be slowly lowered into the well using the leader and rope until it is submerged and slowly brought back to the surface after filling. The contents of the bailer will then be slowly poured into the sampling containers provided by the laboratory.

The preferred order of sample collection is as follows:

- PFAS;
- iron (filtered and unfiltered); and
- field measurements (temperature, DO, pH, and specific conductance).

## **Decontamination Procedures**

Field sampling procedures for decontamination will be completed in accordance with the attached sampling protocol and checklist for sampling monitoring wells for PFC's (Attachments 1 and 2).

The field sampling equipment will be field-decontaminated utilizing the following procedure:

1. non-phosphate detergent and tap water scrub to remove residual particles;
2. generous potable water rinse;
3. distilled/deionized water rinse.

Decontamination of submersible pumps used for monitoring well purging and sampling will use the following procedures:

1. non-phosphate detergent and tap water wash to remove residual particles from the pump casing, hose, and cables;<sup>1</sup>
2. distilled/deionized water rinse;
3. flush a minimum of one gallon of potable water through the pump.

---

<sup>1</sup> Steam cleaning of pump casing, hose and cables may be conducted instead of applying the detergent and tap water rinse.

All tubing used for each well and discarded after use. The submersible pump, associated tubing, and other sampling equipment will be placed on clean polyethylene sheeting prior to use in order to avoid contact with the ground surface.

## **Waste Handling Procedures**

Decontamination water and purged groundwater will be generated during the implementation of the aforementioned activities. If product, a sheen, or heavy odors are observed associated with this water, it will be collected and containerized, and the containers staged on site until the waste can be characterized properly for disposal.

# Field Quality Control Procedures

## Field Duplicates

Field Duplicate samples are collected to evaluate the laboratory's performance by comparing two separate samples that were collected from the same location. The frequency of duplicate sample collection will be five percent or one for every 20 samples, or part thereof, per matrix. If less than 20 samples are collected for a particular matrix, then one duplicate will be collected.

The collection of a duplicate groundwater sample will be obtained by alternately filling sample containers from the same sampling device for each parameter.

## Field Blanks

Field Blanks will be collected as a mechanism of control on sample equipment handling, preparation, storage, and shipment. Field Blanks will be collected for all sampling events involving the collection of groundwater. Field Blanks will be collected for sampling events involving the collection of non-aqueous samples only if the samples are to be analyzed for PFAS and iron.

Field Blanks will be collected at a frequency of one per day during aqueous sampling events. They will be analyzed for any and all parameters analyzed during a particular sampling event on that day of sampling.

Field Blanks for non-aqueous samples will only be collected when environmental samples are to be analyzed for PFAS and iron and then only for those PFAS and iron targeted for analysis in the corresponding environmental samples. In such cases, Field Blanks will be collected at a frequency of five percent of the total number of non-aqueous samples collected over the duration of the sampling event. However, the number of Field Blanks collected will not exceed one per day even if the number of samples collected on a given day exceeds 20.

Field Blank water will be analyte free water provided by the analytical laboratory. The Field Blank water will be transported to the field in bottles that are of the same type as that which is used to contain the Field Blank sample. All Field Blank and sample containers will be transported to and from the field and handled in a manner that is identical, in every practical aspect, to the manner in which environmental samples and sample containers are handled.

**Table 3: Quality Assurance Sample Frequency**

<b>QA Sample Type</b>	<b>Aqueous</b>	<b>Soil</b>
Duplicate	5%	5%
Field Blank	Daily	5% (VOCs only) <sup>2</sup>

---

<sup>2</sup> This frequency is for a multi-day sampling event. If the sampling event is only one day in duration, then one field blank is required no matter how many samples are collected on that day. For multi-day sampling events where more than 20 samples are collected in a single day, one field blank per day is permitted.

## Chain-of-Custody Procedures and Sample Storage

Chain-of-custody procedures have been established to ensure sample traceability from the time of collection through the completion of analyses. The National Enforcement Investigation/ Remediations Center (NEIC) of USEPA considers a sample to be in custody under the following conditions:

- it is in your possession; or
- it is in your view after being in your possession; or
- it was in your possession and you secured it with a lock; or
- it is in a designated secure area.

All environmental samples will be handled under strict chain-of-custody procedures beginning in the field. The First Environment Field Team Leader will be the Field Sample Custodian and will be responsible for ensuring that the procedures outlined in the applicable work plan and this QAPP will be followed. Sample custody for field activities will include the use of chain-of-custody forms, sample labels, and field logbooks. Dedicated field logbooks will be used throughout the project to document field activities.

Once samples are transported to the laboratory, custodial responsibility is transferred to the Laboratory Sample Manager to ensure that the appropriate procedures and methods are followed.

## Data Reduction, Evaluation, and Reporting

The laboratory will submit analytical reports to First Environment. Precision, accuracy, representativeness, comparability, and completeness of the laboratory data will be evaluated based upon adherence to sample holding times and the analysis of QA/QC samples (i.e., duplicates, spikes, and blanks). Data validation of non-CLP reduced deliverables (Category A) will be based upon method-specific QC criteria similar to the criteria of Section 8 of the USEPA 600 series methods provided in 40 CFR Part 136. The overall responsibility for reporting laboratory data lies with the laboratory director. Professional judgment will be used to determine data usability with respect to the Data Quality Objectives. Data validation of CLP deliverables (Category B) will be performed by a third-party verifier and be reported in a Data Usability Summary Report (DUSR) as specified in the NYSDEC Draft DER-10 Technical Guidance for Site Investigation and Remediation dated May 2010.

In accordance with Section 502 of the Public Health Law, data upon which decisions impacting human health are based will be analyzed by an ELAP certified lab and documented by Category B deliverables. The following types of samples fall under this category:

- initial groundwater sampling (including both on-site and off-site sampling);
- soil to remain at the site (waste classification for reuse);
- post-excavation sampling; and
- air sampling, including outdoor air, indoor air, sub-slab vapor, and soil vapor samples.

Assessment of accuracy, precision, and completeness of both field and laboratory measurements is based upon obtaining acceptable results from QA/QC samples. Where appropriate, these may include blanks, duplicate samples, laboratory control spikes, or matrix spike/matrix spike duplicate samples. At least one physical set of Matrix Spike/Matrix Spike Duplicate (MS/MSD) samples will be collected and analyzed per 20 samples for each matrix. Duplicates and MS/MSDs will be collected at least once during each major analytical event.

Method blanks, field blanks, and trip blanks are expected not to contain any targeted analytes with concentrations greater than the reported detection limit, with the possible exception of common laboratory contaminants (e.g., methylene chloride and acetone).

Field and laboratory duplicate results will be assessed based upon the relative percent difference (RPD) between values, using the following equation:

$$RPD = \frac{(D1-D2)}{(D1+D2)/2} \times 100$$

where, D1 = Primary sample result; and  
D2 = Duplicate sample result.

Laboratory Control Samples will be assessed based upon the percent recovery of spiked analytes. The percent recovery will be calculated using the following equation:

$$\text{Percent Recovery} = \frac{X}{TV} \times 100$$

where, X = observed value of measurement; and,  
TV = "true" value of spiked analyte.

Matrix Spike/Matrix Spike Duplicate (MS/MSD) data will be assessed based upon the percent recovery of spiked analytes using the following equation:

$$\text{Percent Recovery} = \frac{(SSR - SR)}{SA} \times 100$$

where, SSA = Spiked sample result for analyte x;  
SR = Sample result for analyte x;  
SA = Spike of analyte x added.

Laboratory completeness will be assessed based upon the amount of valid data obtained from a particular measurement system. It may be quantitatively expressed using the following equation:

$$\text{Laboratory Completeness} = \frac{N1}{N2} \times 100$$

where, N1 = Number of valid measurements obtained; and,  
N2 = Number of measurements validated.

Project Data completeness will be assessed based upon the amount of valid data obtained from field sampling and laboratory analyses. It may be quantitatively expressed using the following equation:

$$\text{Project Completeness} = \frac{N1}{N2} \times 100$$

where,           N1 = Number of valid measurements obtained; and,  
                  N2 = Number of measurements anticipated in the IRM Work Plan.

The laboratory will assess all QC data with regard to precision and accuracy. Individuals making field measurements will determine whether or not field QC criteria were met. A First Environment data validator will examine laboratory analytical data and field data to determine the usability of this data as well as the data's consistency with Analytical Data Quality Objectives.

## Corrective Actions

The need for corrective action will be based upon predetermined limits for acceptability for all aspects of sample collection and analysis. Predetermined limits for acceptability may include, but are not limited to, historical data and precision, accuracy, representativeness, consistency, and completeness criteria.

Laboratory Corrective Actions are described in the laboratory's Quality Assurance Manual. Laboratory personnel will assess laboratory QC samples and, if applicable, re-analyze samples that do not meet Quality Assurance requirements prior to expirations of holding times. Other corrective actions may include collection and analysis of additional samples from the site. Problems that cannot be resolved by the laboratory's managers or QA officers will be brought to the attention of the First Environment Project Manager and WSP Project Manager. The Project Managers, following consulting with NYSDEC, will determine the corrective action to be taken, if any.

The detection of system and performance problems during field activities and the implementation of any resulting corrective actions will be documented in the field logbook and placed in the project file. System and performance problems may include, but not be limited to, field equipment failure, limited or no site access, and unanticipated field conditions. The First Environment Project Manager will be notified of all system and performance problems immediately after field personnel discover them. The Project Manager may consult with the NYSDEC and the Airport, if necessary, to determine the corrective action to be taken, if any.

## **ATTACHMENT 1**

# PFCs Sampling Checklist

Date: \_\_\_\_\_

Weather (*temp./precipitation*): \_\_\_\_\_ Site Name: \_\_\_\_\_

## ***Field Clothing and PPE:***

- No clothing or boots containing Gore-Tex™
- All safety boots made from polyurethane and PVC
- No materials containing Tyvek®
- Field crew has not used fabric softener on clothing
- Field crew has not used cosmetics, moisturizers, hand cream, or other related products this morning
- Field crew has not applied unauthorized sunscreen or insect repellent

## ***Field Equipment:***

- No Teflon® or LDPE containing materials on-site
- All sample materials made from stainless steel, HDPE, acetate, silicon, or polypropylene
- No waterproof field books on-site
- No plastic clipboards, binders, or spiral hard cover notebooks on-site
- No adhesives (Post-It Notes) on-site

- Coolers filled with regular ice only. No chemical (blue) ice packs in possession

## ***Sample Containers:***

- All sample containers made of HDPE or polypropylene
- Caps are unlined and made of HDPE or polypropylene

## ***Wet Weather (as applicable):***

- Wet weather gear made of polyurethane and PVC only

## ***Equipment Decontamination:***

- "PFC-free" water on-site for decontamination of sample equipment. No other water sources to be used.
- Alconox and Liquinox to be used as decontamination materials

## ***Food Considerations:***

- No food or drink on-site with exception of bottled water and/or hydration drinks (i.e., Gatorade and Powerade) that is available for consumption only in the staging area

If any applicable boxes cannot be checked, the Field Lead shall describe the noncompliance issues below and work with field personnel to address noncompliance issues prior to commencement of that day's work. Corrective action shall include removal of noncompliance items from the site or removal of worker offsite until in compliance.

Describe the noncompliance issues (include personnel not in compliance) and action/outcome of noncompliance:

---

---

---

Field Lead Name: \_\_\_\_\_

Field Lead Signature: \_\_\_\_\_ Time: \_\_\_\_\_

## PFC Sampling – Prohibited and Acceptable Items

Prohibited	Acceptable
<b>Field Equipment</b>	
Teflon® containing materials	High-density polyethylene (HDPE) materials
Low density polyethylene (LDPE) materials	Acetate Liners
	Silicon Tubing
Waterproof field books	Loose paper (non-waterproof)
Plastic clipboards, binders, or spiral hard cover notebooks	Aluminum field clipboards or with Masonite
	Sharpies®, pens
Post-It Notes®	
Chemical (blue) ice packs	Regular ice
<b>Field Clothing and PPE</b>	
New cotton clothing or synthetic water resistant, waterproof, or stain-treated clothing, clothing containing Gore-Tex™	Well-laundered clothing made of natural fibers (preferable cotton)
Clothing laundered using fabric softener	No fabric softener
Boots containing Gore-Tex™	Boots made with polyurethane and PVC
Tyvek®	Cotton clothing
No cosmetics, moisturizers, hand cream, or other related products as part of personal cleaning/showering routine on the morning of sampling	<p><b>Sunscreens</b> - Alba Organics Natural Sunscreen, Yes To Cucumbers, Aubrey Organics, Jason Natural Sun Block, Kiss my face, Baby sunscreens that are “free” or “natural”</p> <p><b>Insect Repellents</b> - Jason Natural Quit Bugging Me, Repel Lemon Eucalyptus Insect repellent, Herbal Armor, California Baby Natural Bug Spray, BabyGanics</p> <p><b>Sunscreen and insect repellent</b> - Avon Skin So Soft Bug Guard Plus – SPF 30 Lotion</p>
<b>Sample Containers</b>	
LDPE or glass containers	HDPE or polypropylene
Teflon-lined caps	Unlined polypropylene caps
<b>Rain Events</b>	
Waterproof or resistant rain gear	Gazebo tent that is only touched or moved prior to and following sampling activities
<b>Equipment Decontamination</b>	
Decon 90®	Alconox® and/or Liquinox®
Water from an on-site well	Potable water from municipal drinking water supply
<b>Food Considerations</b>	
All food and drink, with exceptions noted on right	Bottled water and hydration fluids (i.e, Gatorade® and Powerade®) to be brought and consumed only in the staging areas

## **ATTACHMENT 2**

# Collection of Groundwater Samples for Perfluorooctanoic Acid (PFOA) and Perfluorinated Compounds (PFCs) from Monitoring Wells Sample Protocol

**Samples collected using this protocol are intended to be analyzed for perfluorooctanoic acid (PFOA) and other perfluorinated compounds by Modified (Low Level) Test Method 537.**

The procedure used must be consistent with the NYSDEC March 1991 Sampling Guidelines and Protocols [http://www.dec.ny.gov/docs/remediation\\_hudson\\_pdf/sgpsect5.pdf](http://www.dec.ny.gov/docs/remediation_hudson_pdf/sgpsect5.pdf) with the following materials limitations.

At this time acceptable materials for sampling include: stainless steel, high density polyethylene (HDPE), PVC, silicone, acetate and polypropylene. Equipment blanks should be generated at least daily. Additional materials may be acceptable if pre-approved by NYSDEC. Requests to use alternate equipment should include clean equipment blanks. **NOTE: Grunfos pumps and bladder pumps are known to contain PFC materials (e.g. Teflon™ washers for Grunfos pumps and LDPE bladders for bladder pumps).** All sampling equipment components and sample containers should not come in contact with aluminum foil, low density polyethylene (LDPE), glass or polytetrafluoroethylene (PTFE, Teflon™) materials including sample bottle cap liners with a PTFE layer. Standard two step decontamination using detergent and clean water rinse will be performed for equipment that does come in contact with PFC materials. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFC materials must be avoided. Many food and drink packaging materials and “plumbers thread seal tape” contain PFCs.

All clothing worn by sampling personnel must have been laundered multiple times. The sampler must wear nitrile gloves while filling and sealing the sample bottles.

Pre-cleaned sample bottles with closures, coolers, ice, sample labels and a chain of custody form will be provided by the laboratory.

1. Fill two pre-cleaned 500 mL HDPE or polypropylene bottle with the sample.
2. Cap the bottles with an acceptable cap and liner closure system.
3. Label the sample bottles.
4. Fill out the chain of custody.
5. Place in a cooler maintained at  $4 \pm 2^{\circ}$  Celsius.

Collect one equipment blank for every sample batch, not to exceed 20 samples.

Collect one field duplicate for every sample batch, not to exceed 20 samples.

Collect one matrix spike / matrix spike duplicate (MS/MSD) for every sample batch, not to exceed 20 samples.

Request appropriate data deliverable (Category A or B) and an electronic data deliverable.